



802.11ax-HE80 26dB Bandwidth


Channel 42 (5210MHz)

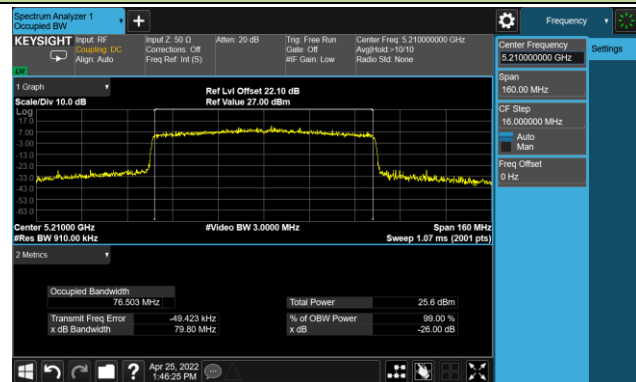


Channel 58 (5290MHz)

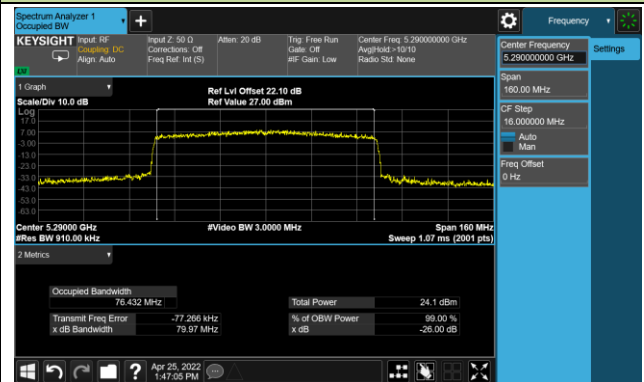


Channel 106 (5530MHz)

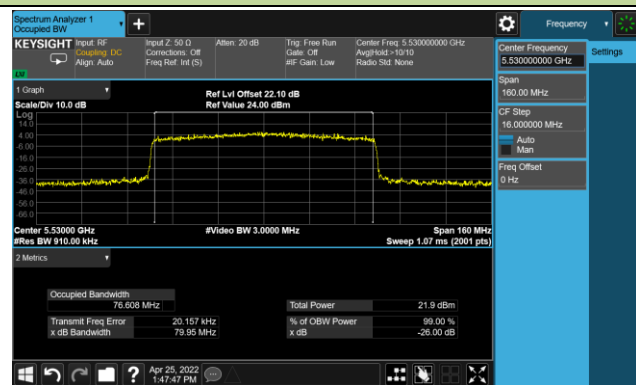


Channel 122 (5610MHz)

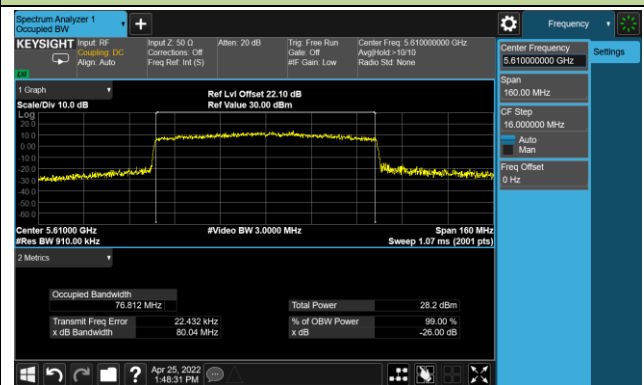

Channel 138 (5690MHz)

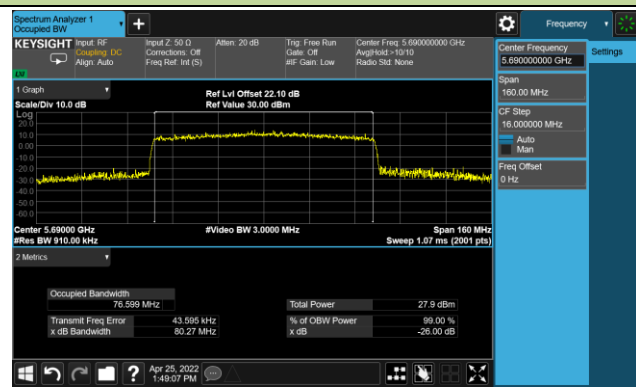

Channel 155 (5775MHz)

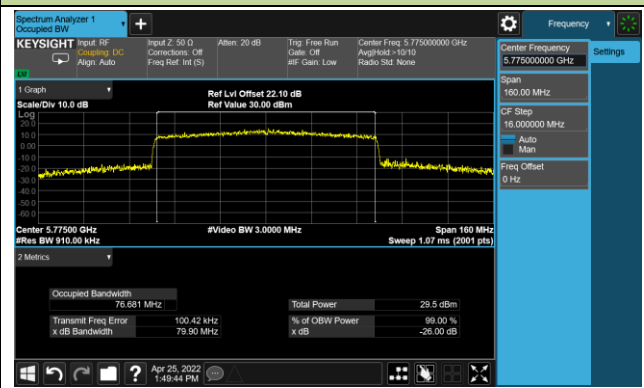


A.3 6dB Bandwidth Test Result

Test Site	SIP-TR1	Test Engineer	Nandy Zhang
Test Date	2022/04/25		


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
11a	6Mbps	149	5745	15.02	≥ 0.5
11a	6Mbps	157	5785	15.13	≥ 0.5
11a	6Mbps	165	5825	16.33	≥ 0.5
11ac-VHT20	MCS0	149	5745	12.94	≥ 0.5
11ac-VHT20	MCS0	157	5785	14.86	≥ 0.5
11ac-VHT20	MCS0	165	5825	17.55	≥ 0.5
11ac-VHT40	MCS0	151	5755	32.61	≥ 0.5
11ac-VHT40	MCS0	159	5795	33.87	≥ 0.5
11ac-VHT80	MCS0	155	5775	75.12	≥ 0.5
11ax-HE20	MCS0	149	5745	17.07	≥ 0.5
11ax-HE20	MCS0	157	5785	15.13	≥ 0.5
11ax-HE20	MCS0	165	5825	15.05	≥ 0.5
11ax-HE40	MCS0	151	5755	35.10	≥ 0.5
11ax-HE40	MCS0	159	5795	35.11	≥ 0.5
11ax-HE80	MCS0	155	5775	75.11	≥ 0.5

802.11a 6dB Bandwidth


Channel 149 (5745MHz)

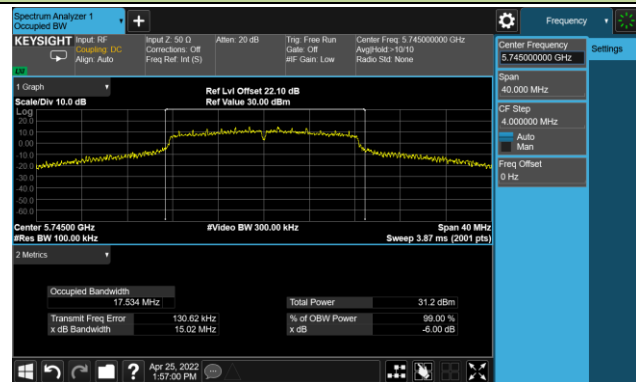

Channel 157 (5785MHz)

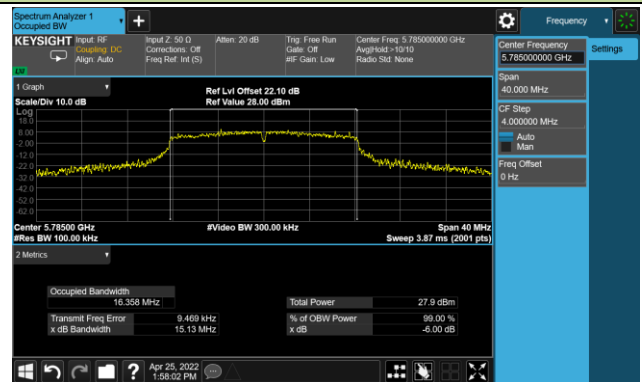


Channel 165 (5825MHz)

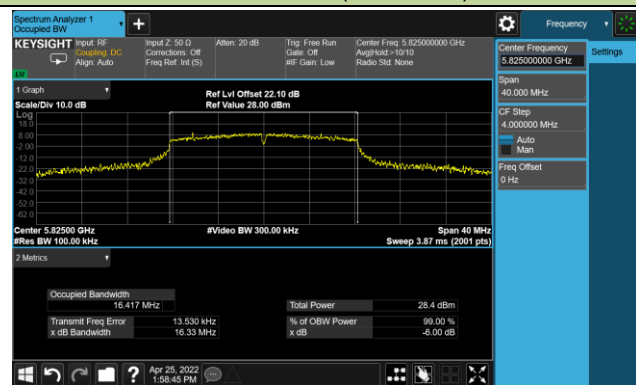


802.11ac-VHT20 6dB Bandwidth

Channel 149 (5745MHz)

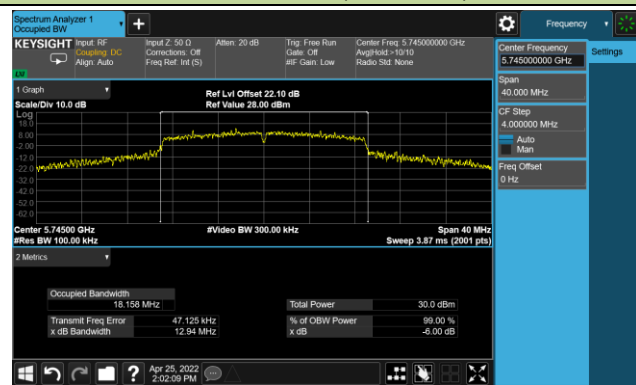

Channel 157 (5785MHz)

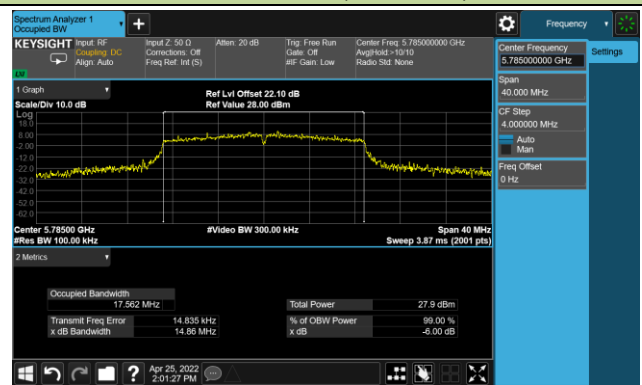


Channel 165 (5825MHz)




802.11ac-VHT40 6dB Bandwidth

Channel 151 (5755MHz)

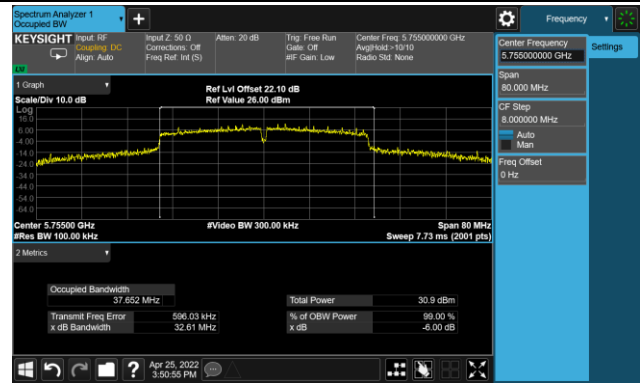


Channel 159 (5795MHz)

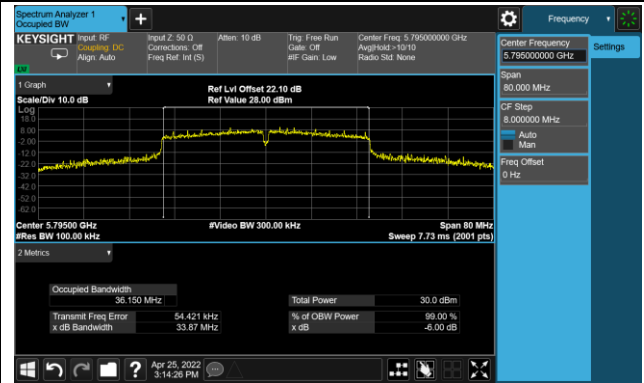


802.11ac-VHT80 6dB Bandwidth

Channel 155 (5775MHz)

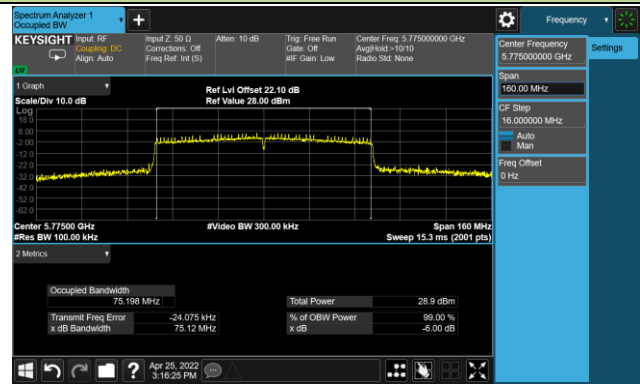


802.11ax-HE20 6dB Bandwidth


Channel 149 (5745MHz)

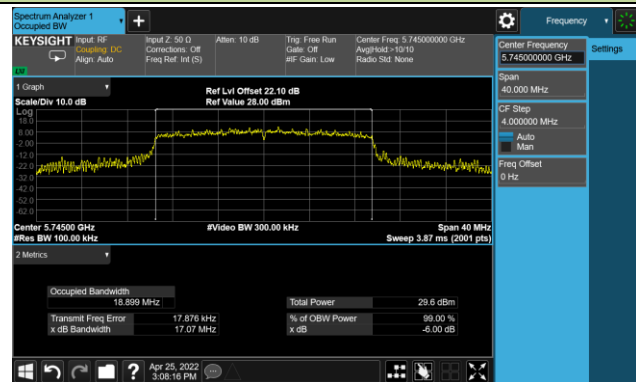

Channel 157 (5785MHz)

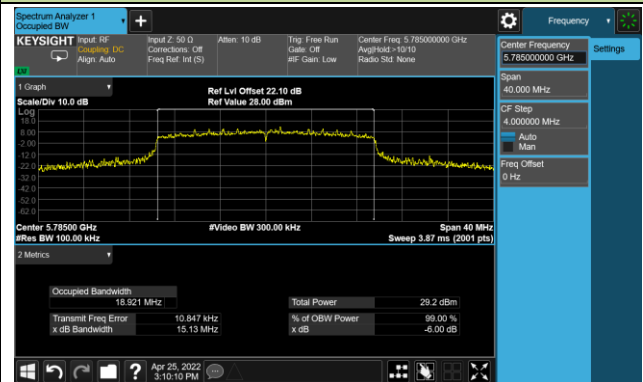


Channel 165 (5825MHz)

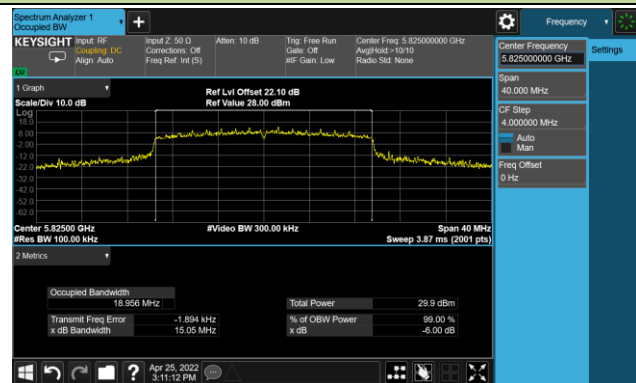



802.11ac-VHT40 6dB Bandwidth

Channel 151 (5755MHz)

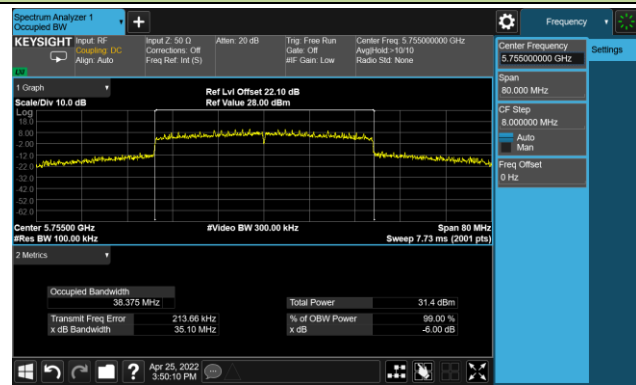

Channel 159 (5795MHz)

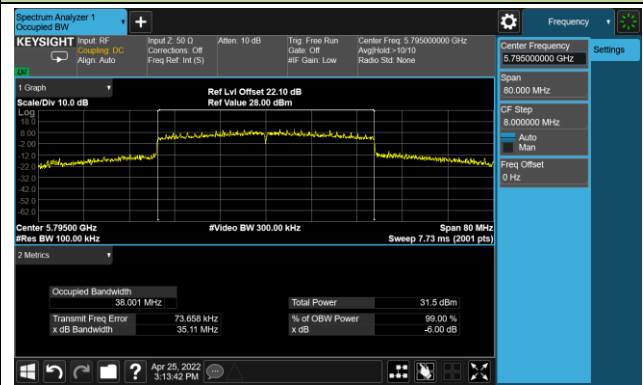

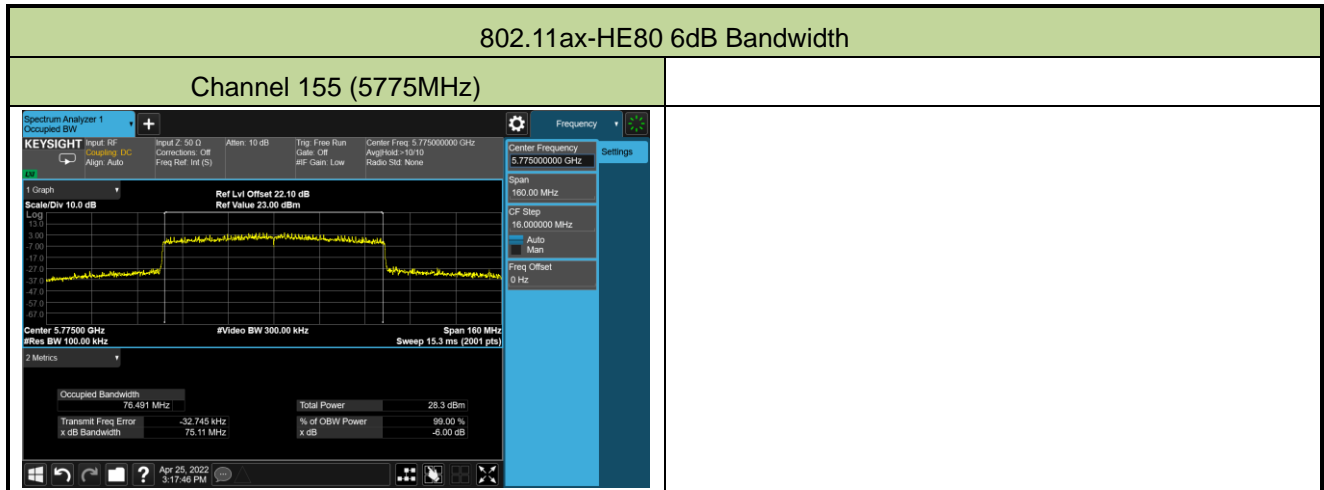

A.4 Output Power Test Result

Output power test was verified over all data rates of each mode shown as below table, and then choose the maximum output power (gray marker) for final test of each channel.

Test Mode	Bandwidth	Channel No.	Frequency (MHz)	Data Rate/ MCS	Average Power (dBm)
802.11a	20	36	5180	6Mbps	23.16
				24Mbps	22.31
				54Mbps	19.53
802.11ac	20	36	5180	MCS0	21.76
				MCS5	20.74
				MCS9	17.85
802.11ac	40	38	5190	MCS0	19.13
				MCS5	17.81
				MCS9	14.60
802.11ac	80	42	5210	MCS0	16.75
				MCS5	14.15
				MCS9	10.64
802.11ax	20	36	5180	MCS0	21.79
				MCS6	19.49
				MCS11	17.37
802.11ax	40	38	5190	MCS0	18.53
				MCS6	16.38
				MCS11	14.02
802.11ax	80	42	5210	MCS0	17.72
				MCS6	15.07
				MCS11	12.25

Test Site	SIP-TR1	Test Engineer	Nandy Zhang
Test Date	2022/04/09		

Test Mode	Data Rate MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Total Average Power (dBm)	Average Power Limit (dBm)
				Ant 0	Ant 1		
11a	6Mbps	36	5180	23.16	23.04	26.11	≤ 30.00
11a	6Mbps	44	5220	23.10	22.91	26.02	≤ 30.00
11a	6Mbps	48	5240	23.41	23.17	26.30	≤ 30.00
11a	6Mbps	52	5260	16.66	17.45	20.08	≤ 23.98
11a	6Mbps	60	5300	16.56	17.14	19.87	≤ 23.98
11a	6Mbps	64	5320	17.05	17.25	20.16	≤ 23.98
11a	6Mbps	100	5500	16.33	17.45	19.94	≤ 23.98
11a	6Mbps	116	5580	16.73	16.83	19.79	≤ 23.98
11a	6Mbps	140	5700	16.47	16.93	19.72	≤ 23.98
11a	6Mbps	144	5720	17.81	17.69	20.76	≤ 22.72
11a	6Mbps	149	5745	25.49	25.12	28.32	≤ 30.00
11a	6Mbps	157	5785	23.14	22.78	25.97	≤ 30.00
11a	6Mbps	165	5825	23.44	22.76	26.12	≤ 30.00
11ac-VHT20	MCS0	36	5180	21.76	22.38	25.09	≤ 30.00
11ac-VHT20	MCS0	44	5220	23.68	23.31	26.51	≤ 30.00
11ac-VHT20	MCS0	48	5240	23.25	23.22	26.25	≤ 30.00
11ac-VHT20	MCS0	52	5260	16.05	16.93	19.52	≤ 23.98
11ac-VHT20	MCS0	60	5300	16.57	17.12	19.86	≤ 23.98
11ac-VHT20	MCS0	64	5320	16.48	17.28	19.91	≤ 23.98
11ac-VHT20	MCS0	100	5500	16.67	17.84	20.30	≤ 23.98
11ac-VHT20	MCS0	116	5580	17.32	16.76	20.06	≤ 23.98
11ac-VHT20	MCS0	140	5700	17.63	17.23	20.44	≤ 23.98
11ac-VHT20	MCS0	144	5720	17.58	17.22	20.41	≤ 22.80
11ac-VHT20	MCS0	149	5745	25.72	25.41	28.58	≤ 30.00
11ac-VHT20	MCS0	157	5785	22.79	22.52	25.67	≤ 30.00
11ac-VHT20	MCS0	165	5825	22.65	22.21	25.45	≤ 30.00

Test Mode	Data Rate MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Total Average Power (dBm)	Average Power Limit (dBm)
				Ant 0	Ant 1		
11ac-VHT40	MCS0	38	5190	19.13	19.71	22.44	≤ 30.00
11ac-VHT40	MCS0	46	5230	25.67	24.93	28.33	≤ 30.00
11ac-VHT40	MCS0	54	5270	18.51	18.94	21.74	≤ 23.98
11ac-VHT40	MCS0	62	5310	18.78	19.77	22.31	≤ 23.98
11ac-VHT40	MCS0	102	5510	18.70	18.05	21.40	≤ 23.98
11ac-VHT40	MCS0	110	5550	19.68	19.32	22.51	≤ 23.98
11ac-VHT40	MCS0	134	5670	19.22	19.65	22.45	≤ 23.98
11ac-VHT40	MCS0	142	5710	19.53	19.44	22.50	≤ 23.98
11ac-VHT40	MCS0	151	5755	25.41	24.81	28.13	≤ 30.00
11ac-VHT40	MCS0	159	5795	23.84	24.13	27.00	≤ 30.00
11ac-VHT80	MCS0	42	5210	16.75	15.95	19.38	≤ 30.00
11ac-VHT80	MCS0	58	5290	16.51	16.28	19.41	≤ 23.98
11ac-VHT80	MCS0	106	5530	17.62	18.35	21.01	≤ 23.98
11ac-VHT80	MCS0	122	5610	20.85	20.68	23.78	≤ 23.98
11ac-VHT80	MCS0	138	5690	20.43	21.23	23.86	≤ 23.98
11ac-VHT80	MCS0	155	5775	21.66	21.45	24.57	≤ 30.00
11ax-HE20	MCS0	36	5180	21.79	22.08	24.95	≤ 30.00
11ax-HE20	MCS0	44	5220	23.17	22.85	26.02	≤ 30.00
11ax-HE20	MCS0	48	5240	23.27	22.79	26.05	≤ 30.00
11ax-HE20	MCS0	52	5260	16.48	16.95	19.73	≤ 23.98
11ax-HE20	MCS0	60	5300	16.29	16.95	19.64	≤ 23.98
11ax-HE20	MCS0	64	5320	16.81	17.13	19.98	≤ 23.98
11ax-HE20	MCS0	100	5500	16.51	17.59	20.09	≤ 23.98
11ax-HE20	MCS0	116	5580	16.68	17.14	19.93	≤ 23.98
11ax-HE20	MCS0	140	5700	16.38	16.93	19.67	≤ 23.98
11ax-HE20	MCS0	144	5720	16.83	17.48	20.18	≤ 23.50
11ax-HE20	MCS0	149	5745	23.96	23.53	26.76	≤ 30.00
11ax-HE20	MCS0	157	5785	22.84	23.03	25.95	≤ 30.00
11ax-HE20	MCS0	165	5825	23.02	22.68	25.86	≤ 30.00

Test Mode	Data Rate MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Total Average Power (dBm)	Average Power Limit (dBm)
				Ant 0	Ant 1		
11ax-HE40	MCS0	38	5190	18.53	18.92	21.74	≤ 30.00
11ax-HE40	MCS0	46	5230	25.42	24.68	28.08	≤ 30.00
11ax-HE40	MCS0	54	5270	19.49	20.10	22.82	≤ 23.98
11ax-HE40	MCS0	62	5310	17.35	17.68	20.53	≤ 23.98
11ax-HE40	MCS0	102	5510	17.33	18.43	20.93	≤ 23.98
11ax-HE40	MCS0	110	5550	20.23	20.15	23.20	≤ 23.98
11ax-HE40	MCS0	134	5670	19.83	20.22	23.04	≤ 23.98
11ax-HE40	MCS0	142	5710	20.45	20.04	23.26	≤ 23.98
11ax-HE40	MCS0	151	5755	25.11	24.78	27.96	≤ 30.00
11ax-HE40	MCS0	159	5795	24.43	24.16	27.31	≤ 30.00
11ax-HE80	MCS0	42	5210	17.72	17.62	20.68	≤ 30.00
11ax-HE80	MCS0	58	5290	16.62	17.16	19.91	≤ 23.98
11ax-HE80	MCS0	106	5530	16.16	17.20	19.72	≤ 23.98
11ax-HE80	MCS0	122	5610	21.15	20.55	23.87	≤ 23.98
11ax-HE80	MCS0	138	5690	20.62	20.86	23.75	≤ 23.98
11ax-HE80	MCS0	155	5775	21.82	21.74	24.79	≤ 30.00

Note 1: Total Average Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$.

Note 2:

For 5250-5350MHz & 5470-5725MHz, the conducted power limit is as below.

802.11a: $11 + 10 \log_{10} (20.16) = 24.04 > 23.98$ dBm

802.11ac-VHT20: $11 + 10 \log_{10} (20.34) = 24.08 > 23.98$ dBm

802.11ax-HE20: $11 + 10 \log_{10} (25.66) = 25.09 > 23.98$ dBm

802.11ac-VHT40/ax-HE40/ac-VHT80/ax-HE80: $11 + 10 \log_{10} B > 23.98$ dBm

Note 3: For straddle channel, the conducted power limit is as below.

802.11a CH144: $11 + 10 \log_{10} (B) = 22.72$ dBm, $B = 19.72/2 + 5 = 14.86$ MHz.

802.11ac-VHT20 CH144: $11 + 10 \log_{10} (B) = 22.80$ dBm, $B = 20.23/2 + 5 = 15.12$ MHz.

802.11ax-HE20 CH144: $11 + 10 \log_{10} (B) = 23.50$ dBm, $B = 25.58/2 + 5 = 17.79$ MHz.

802.11ac-VHT40/ax-HE40/ac-VHT80/ax-HE80: $11 + 10 \log_{10} B > 23.98$ dBm

A.5 Power Spectral Density Test Result

Test Site	SIP-TR1	Test Engineer	Nandy Zhang
Test Date	2022/04/09~2022/04/16		
Test Item	Power Spectral Density (UNII-Band 1 & UNII-2a & UNII-2c)		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	AVPSD (dBm/ MHz)		Duty Cycle (%)	Total PSD (dBm/ MHz)	PSD Limit (dBm/MHz)
				Ant 0	Ant 1			
11a	6Mbps	36	5180	12.23	12.54	95.61	15.60	15.79
11a	6Mbps	44	5220	12.10	11.94	95.61	15.23	15.79
11a	6Mbps	48	5240	12.55	12.35	95.61	15.65	15.79
11a	6Mbps	52	5260	6.24	6.57	95.61	9.62	9.79
11a	6Mbps	60	5300	5.95	6.61	95.61	9.50	9.79
11a	6Mbps	64	5320	6.15	6.63	95.61	9.60	9.79
11a	6Mbps	100	5500	5.72	6.74	95.61	9.46	9.99
11a	6Mbps	116	5580	6.60	6.27	95.61	9.64	9.99
11a	6Mbps	140	5700	6.06	6.44	95.61	9.46	9.99
11a	6Mbps	144	5720	6.81	6.60	95.61	9.91	9.99
11ac-VHT20	MCS0	36	5180	11.46	11.93	95.57	14.91	15.79
11ac-VHT20	MCS0	44	5220	12.42	12.01	95.57	15.42	15.79
11ac-VHT20	MCS0	48	5240	12.49	12.05	95.57	15.49	15.79
11ac-VHT20	MCS0	52	5260	6.03	6.24	95.57	9.34	9.79
11ac-VHT20	MCS0	60	5300	6.15	6.62	95.57	9.60	9.79
11ac-VHT20	MCS0	64	5320	5.84	6.65	95.57	9.47	9.79
11ac-VHT20	MCS0	100	5500	6.23	6.96	95.57	9.81	9.99
11ac-VHT20	MCS0	116	5580	6.40	6.44	95.57	9.63	9.99
11ac-VHT20	MCS0	140	5700	6.89	6.54	95.57	9.92	9.99
11ac-VHT20	MCS0	144	5720	6.64	6.43	95.57	9.74	9.99
11ac-VHT40	MCS0	38	5190	5.83	5.80	85.52	9.51	15.79
11ac-VHT40	MCS0	46	5230	12.27	11.58	85.52	15.63	15.79
11ac-VHT40	MCS0	54	5270	5.31	6.02	85.52	9.37	9.79
11ac-VHT40	MCS0	62	5310	5.77	6.18	85.52	9.67	9.79
11ac-VHT40	MCS0	102	5510	4.61	5.55	85.52	8.80	9.99
11ac-VHT40	MCS0	110	5550	5.97	6.09	85.52	9.72	9.99
11ac-VHT40	MCS0	134	5670	5.58	5.67	85.52	9.31	9.99
11ac-VHT40	MCS0	142	5710	5.90	5.73	85.52	9.51	9.99

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	AVPSD (dBm/ MHz)		Duty Cycle (%)	Total PSD (dBm/ MHz)	PSD Limit (dBm/MHz)
				Ant 0	Ant 1			
				11ac-VHT80	MCS0			
11ac-VHT80	MCS0	58	5290	-0.57	-0.62	84.49	3.15	9.79
11ac-VHT80	MCS0	106	5530	1.01	1.89	84.49	5.21	9.99
11ac-VHT80	MCS0	122	5610	4.79	4.11	84.49	8.20	9.99
11ac-VHT80	MCS0	138	5690	4.16	4.38	84.49	8.02	9.99
11ax-HE20	MCS0	36	5180	10.69	11.08	84.20	14.64	15.79
11ax-HE20	MCS0	44	5220	11.75	11.49	84.20	15.38	15.79
11ax-HE20	MCS0	48	5240	11.58	11.59	84.20	15.34	15.79
11ax-HE20	MCS0	52	5260	5.37	5.66	84.20	9.27	9.79
11ax-HE20	MCS0	60	5300	5.19	5.75	84.20	9.23	9.79
11ax-HE20	MCS0	64	5320	5.43	6.13	84.20	9.55	9.79
11ax-HE20	MCS0	100	5500	5.61	6.66	84.20	9.92	9.99
11ax-HE20	MCS0	116	5580	6.07	5.65	84.20	9.62	9.99
11ax-HE20	MCS0	140	5700	6.20	5.83	84.20	9.77	9.99
11ax-HE20	MCS0	144	5720	6.28	5.90	84.20	9.85	9.99
11ax-HE40	MCS0	38	5190	4.95	4.26	83.59	8.41	15.79
11ax-HE40	MCS0	46	5230	12.02	11.14	83.59	15.39	15.79
11ax-HE40	MCS0	54	5270	5.54	5.91	83.59	9.52	9.79
11ax-HE40	MCS0	62	5310	3.92	3.68	83.59	7.59	9.79
11ax-HE40	MCS0	102	5510	3.12	4.15	83.59	7.46	9.99
11ax-HE40	MCS0	110	5550	6.15	5.99	83.59	9.86	9.99
11ax-HE40	MCS0	134	5670	5.81	6.11	83.59	9.75	9.99
11ax-HE40	MCS0	142	5710	5.84	5.83	83.59	9.62	9.99
11ax-HE80	MCS0	42	5210	0.83	0.00	83.30	4.24	15.79
11ax-HE80	MCS0	58	5290	0.29	0.57	83.30	4.24	9.79
11ax-HE80	MCS0	106	5530	-1.70	-0.77	83.30	2.59	9.99
11ax-HE80	MCS0	122	5610	4.16	3.85	83.30	7.81	9.99
11ax-HE80	MCS0	138	5690	3.34	3.40	83.30	7.17	9.99

Note 1: When EUT duty cycle < 98%, the total PSD (dBm/MHz) = $10 \cdot \log \{10^{(\text{Ant 0 AVGPSD}/10)} + 10^{(\text{Ant 1 AVGPSD}/10)}\} + 10 \cdot \log (1/\text{Duty cycle})$.

Note 2:

For 5150 - 5250MHz Band: PSD Limit (dBm/MHz) = 17 - (7.21 - 6) = 15.79 dBm/MHz.

For 5250 - 5350MHz Band: PSD Limit (dBm/MHz) = 11 - (7.21 - 6) = 9.79 dBm/MHz.

For 5470 - 5725MHz Band: PSD Limit (dBm/MHz) = 11 - (7.01 - 6) = 9.99 dBm/MHz

Test Site	SIP-TR1	Test Engineer	Nandy Zhang
Test Date	2022/04/09 ~ 2022/04/25		
Test Item	Power Spectral Density (UNII-Band 3)		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	AVPSD (dBm/ 510KHz)		Duty Cycle (%)	Total PSD (dBm/ 510KHz)	PSD Limit (dBm/ 500KHz)
				Ant 0	Ant 1			
11a	6Mbps	149	5745	12.15	11.43	95.61	15.01	28.39
11a	6Mbps	157	5785	9.36	9.53	95.61	12.65	28.39
11a	6Mbps	165	5825	9.69	9.13	95.61	12.62	28.39
11ac-VHT20	MCS0	149	5745	11.90	11.12	95.57	14.73	28.39
11ac-VHT20	MCS0	157	5785	9.17	9.10	95.57	12.34	28.39
11ac-VHT20	MCS0	165	5825	9.00	8.43	95.57	11.93	28.39
11ac-VHT40	MCS0	151	5755	8.32	9.01	85.52	12.37	28.39
11ac-VHT40	MCS0	159	5795	7.74	7.27	85.52	11.20	28.39
11ac-VHT80	MCS0	155	5775	0.64	0.87	84.49	4.50	28.39
11ax-HE20	MCS0	149	5745	9.99	9.59	84.20	13.55	28.39
11ax-HE20	MCS0	157	5785	8.85	8.60	84.20	12.48	28.39
11ax-HE20	MCS0	165	5825	9.20	8.70	84.20	12.71	28.39
11ax-HE40	MCS0	151	5755	8.18	8.34	83.59	12.05	28.39
11ax-HE40	MCS0	159	5795	7.90	7.34	83.59	11.42	28.39
11ax-HE80	MCS0	155	5775	1.91	1.72	83.30	5.62	28.39


Note 1:

When EUT duty cycle < 98%, the total PSD (dBm/510kHz) = $10 \cdot \log \{10^{(\text{Ant 0 AVGPSD}/10)} + 10^{(\text{Ant 1 AVGPSD}/10)}\} + 10 \cdot \log (1/\text{Duty cycle})$.


Note 2: PSD Limit (dBm/500KHz) = $30 - (7.61 - 6) = 28.39\text{dBm/MHz}$.

802.11a Power Spectral Density- Ant 0


Channel 36 (5180MHz)

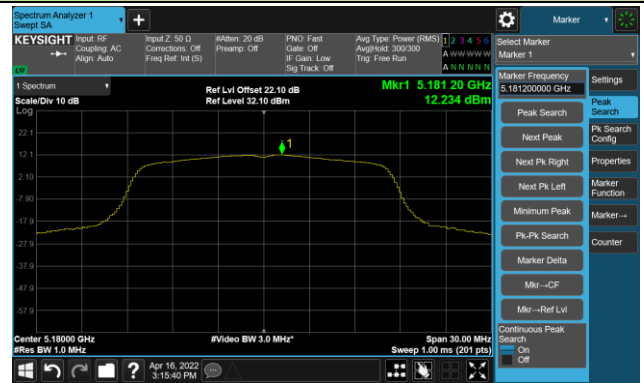

Channel 44 (5220MHz)

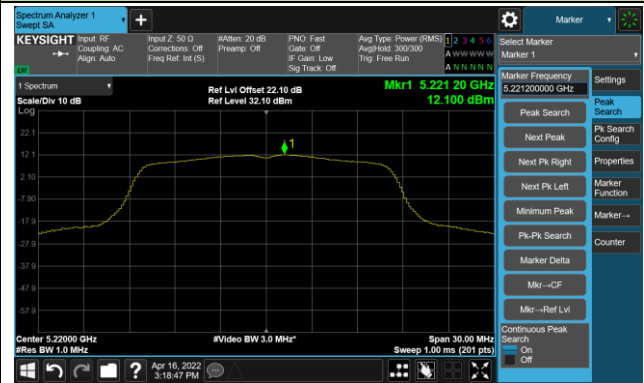

Channel 48 (5240MHz)

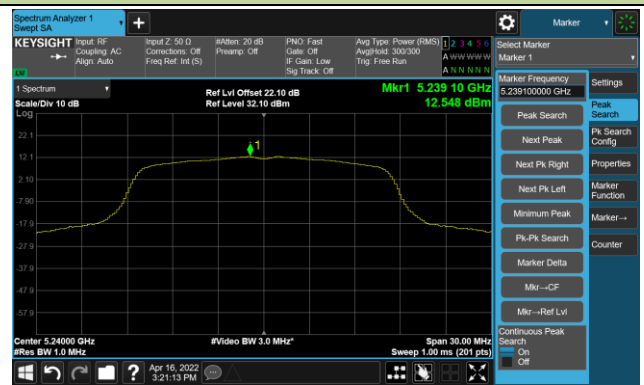


Channel 52 (5260MHz)



Channel 60 (5300MHz)




Channel 64 (5320MHz)

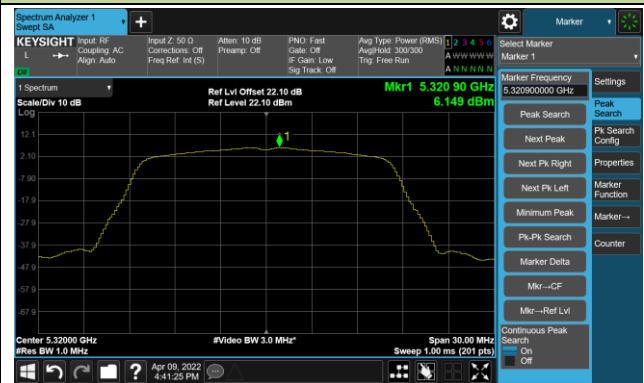

Channel 100 (5500MHz)




Channel 116 (5580MHz)

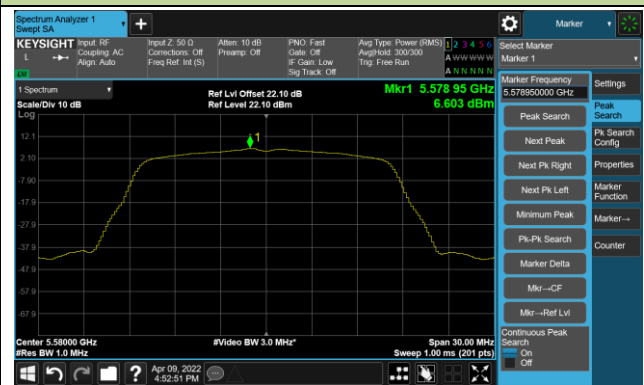

802.11a Power Spectral Density- Ant 0


Channel 140 (5700MHz)

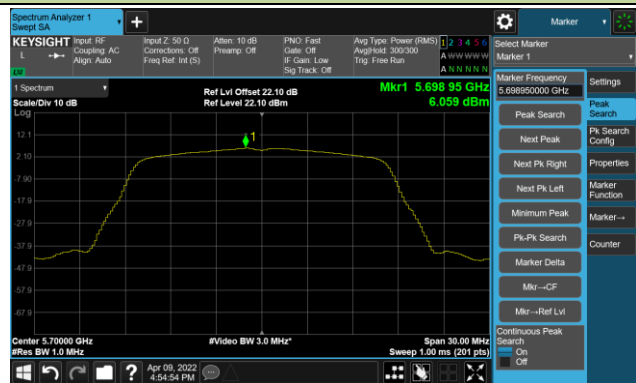


Channel 144(5720MHz)



Channel 149 (5745MHz)

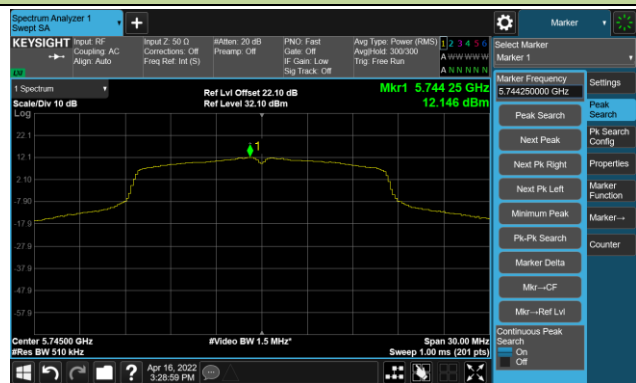

Channel 157 (5785MHz)

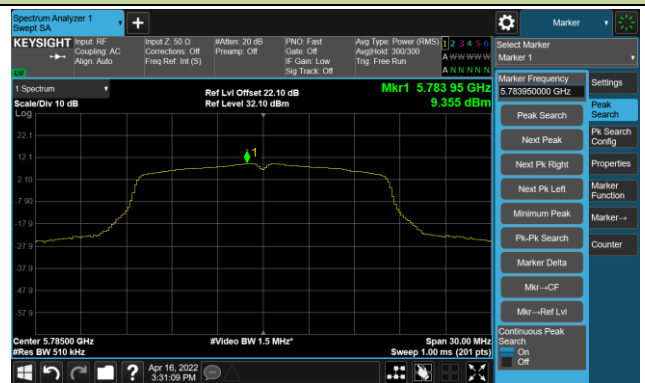

Channel 165 (5825MHz)




802.11ac-VHT20 Power Spectral Density- Ant 0

Channel 36 (5180MHz)




Channel 44 (5220MHz)

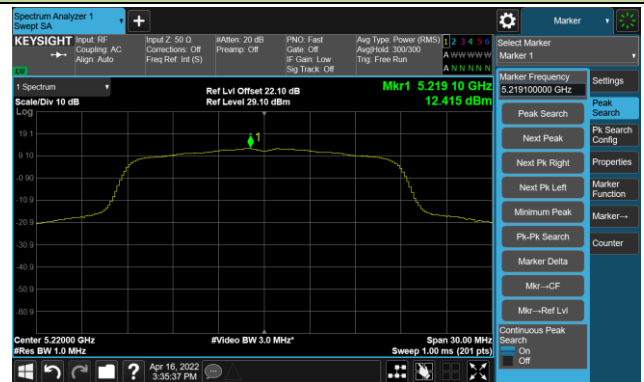

Channel 48 (5240MHz)



Channel 52 (5260MHz)

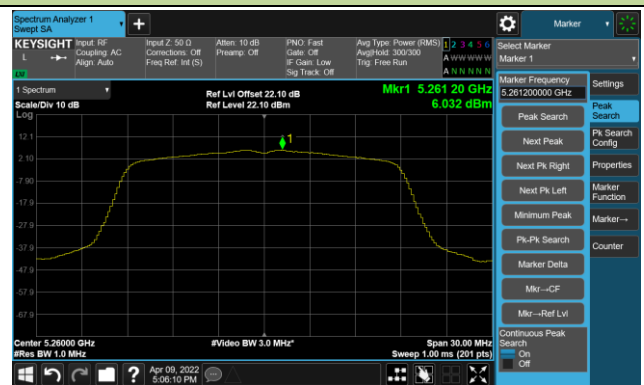


Channel 60 (5300MHz)




Channel 64 (5320MHz)



Channel 100 (5500MHz)

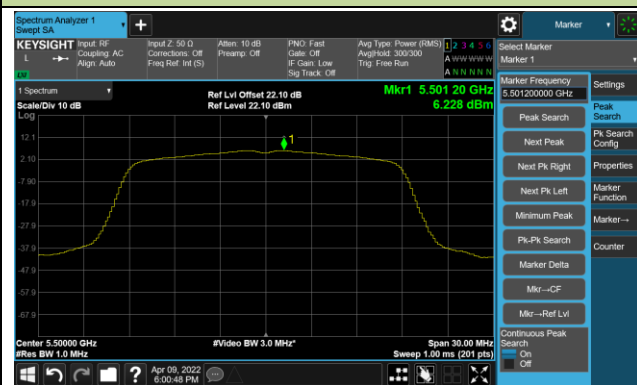


Channel 116 (5580MHz)

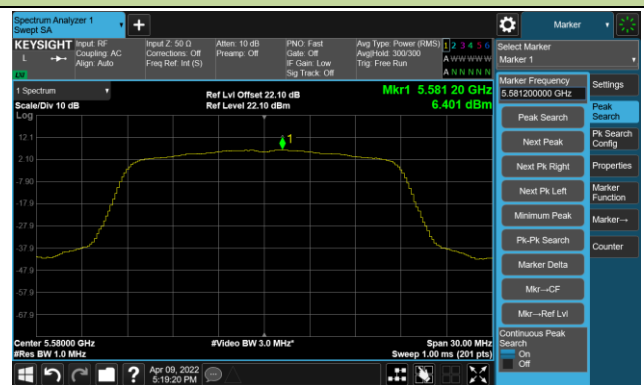

802.11ac-VHT20 Power Spectral Density- Ant 0


Channel 140 (5700MHz)

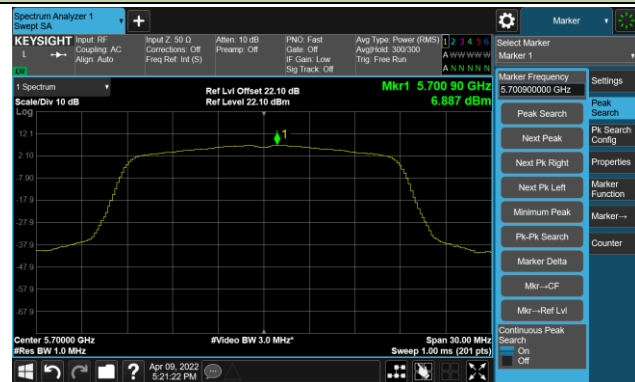


Channel 144(5720MHz)




Channel 149 (5745MHz)

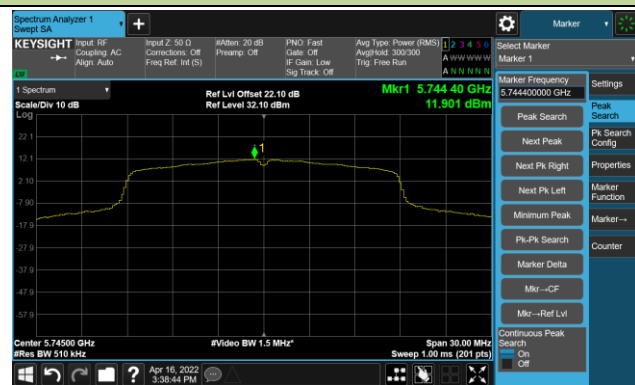

Channel 157 (5785MHz)

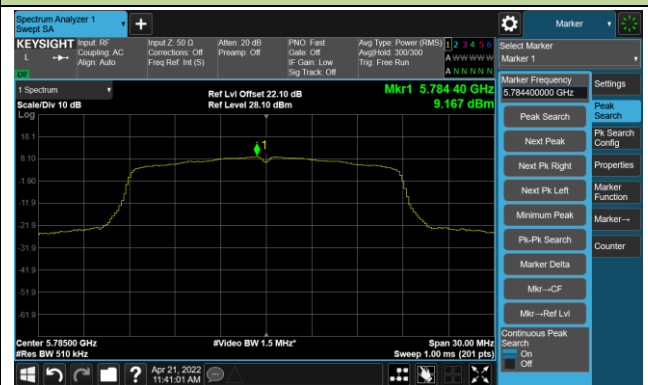


Channel 165 (5825MHz)

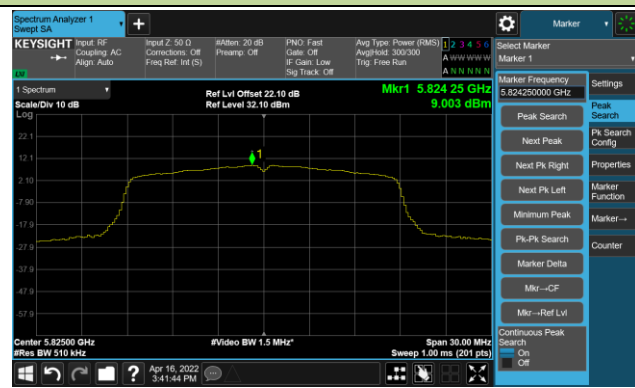


802.11ac-VHT40 Power Spectral Density- Ant 0


Channel 38 (5190MHz)

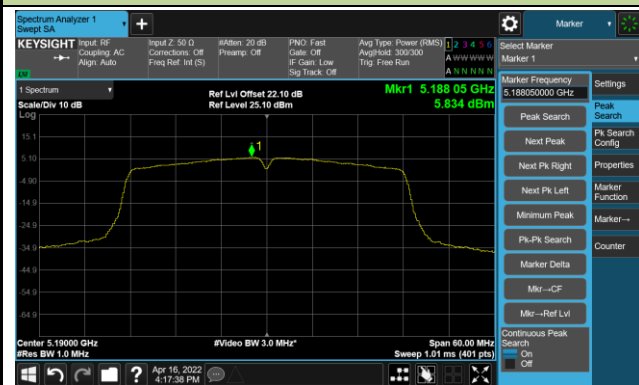


Channel 46 (5230MHz)

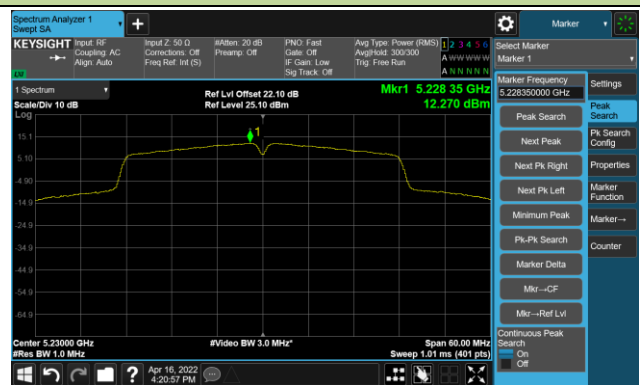


Channel 54 (5270MHz)

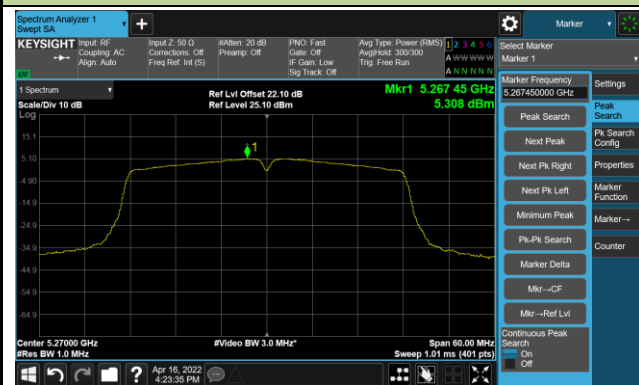

Channel 62 (5310MHz)

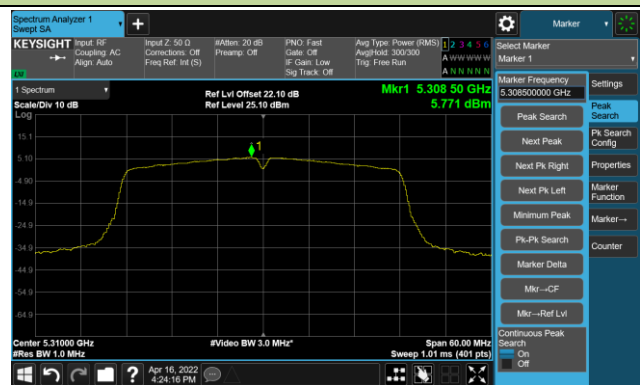


Channel 102 (5510MHz)

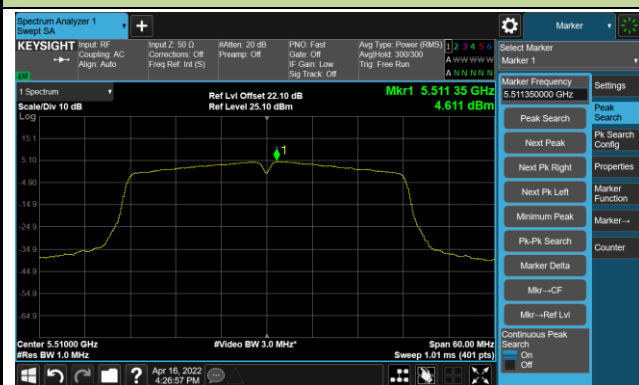

Channel 110 (5550MHz)



Channel 134 (5670MHz)

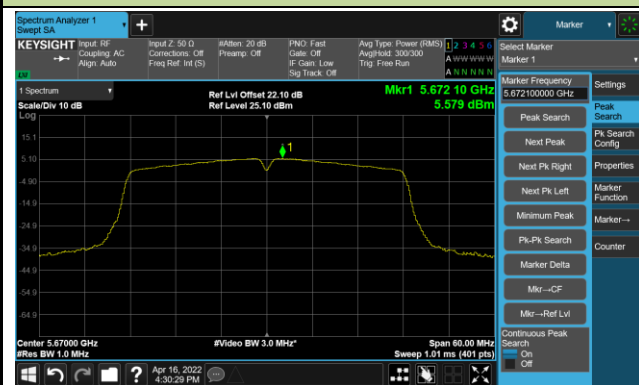



Channel 142(5710MHz)



802.11ac-VHT40 Power Spectral Density- Ant 0


Channel 151 (5755MHz)

Channel 159 (5795MHz)

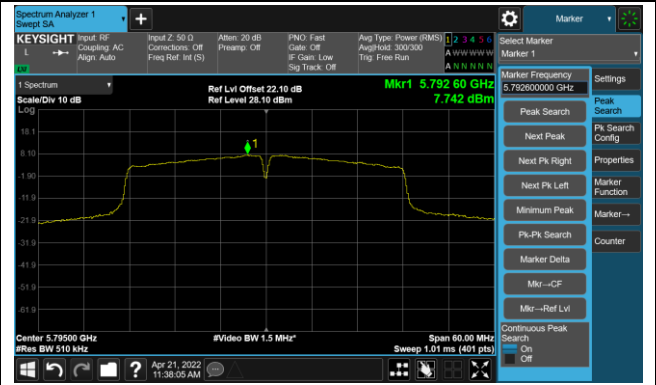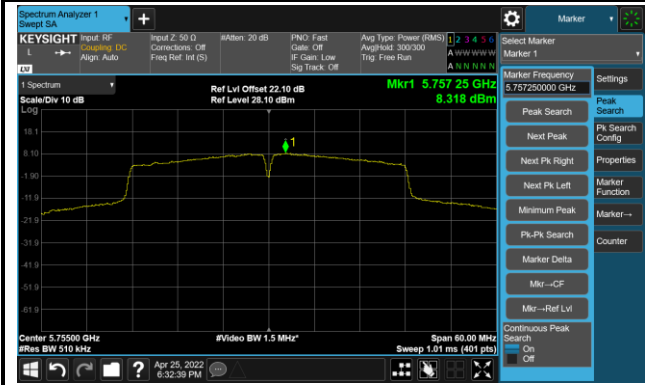


802.11ac-VHT80 Power Spectral Density- Ant 0


Channel 42 (5210MHz)

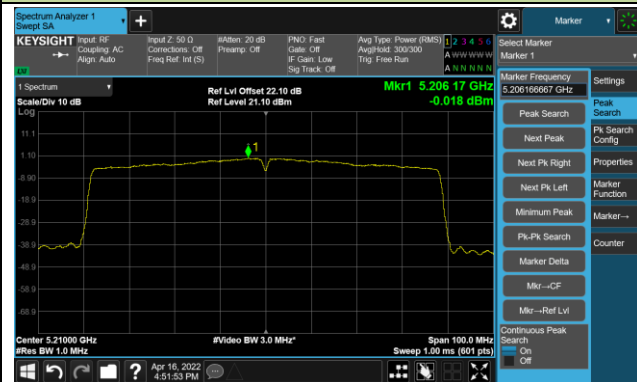


Channel 58 (5290MHz)

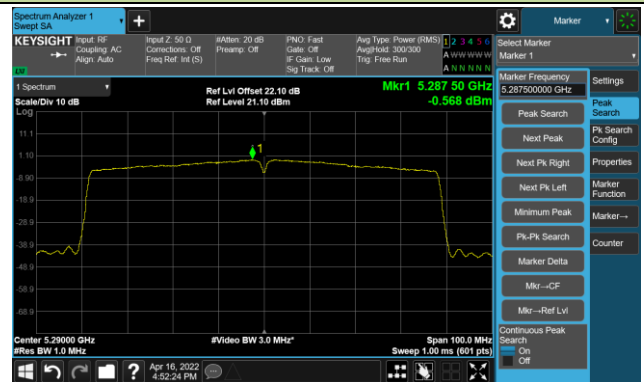

Channel 106 (5530MHz)

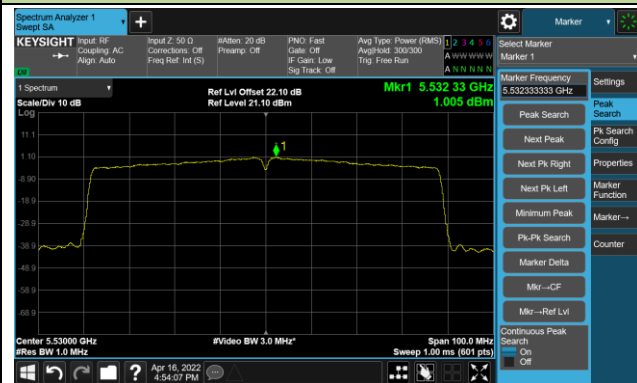


Channel 122 (5610MHz)

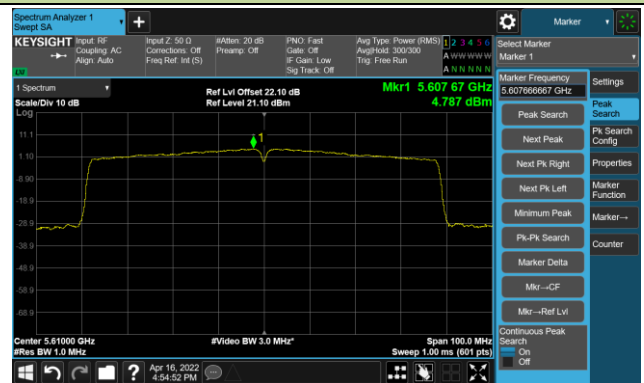

Channel 138 (5690MHz)



Channel 155 (5775MHz)

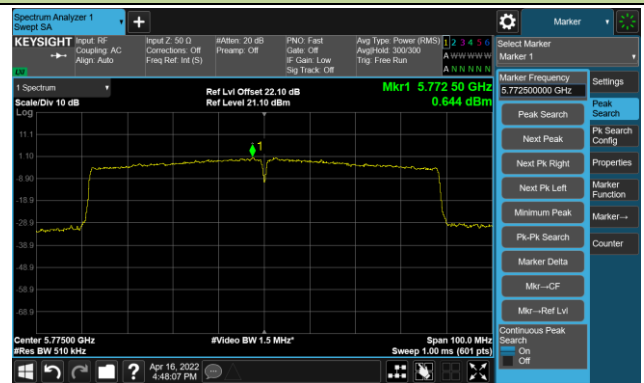

802.11ax-HE20 Power Spectral Density- Ant 0

Channel 36 (5180MHz)



Channel 44 (5220MHz)



Channel 48 (5240MHz)



Channel 52 (5260MHz)



Channel 60 (5300MHz)



Channel 64 (5320MHz)



Channel 100 (5500MHz)




Channel 116 (5580MHz)




802.11ax-HE20 Power Spectral Density- Ant 0

Channel 140 (5700MHz)

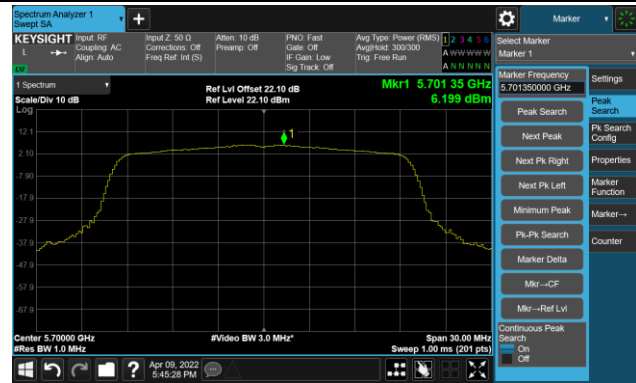

Channel 144(5720MHz)

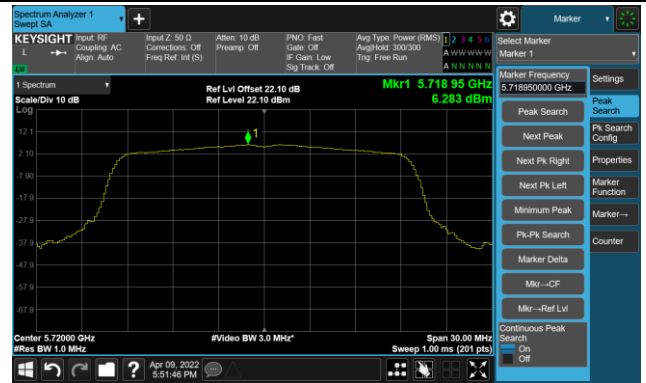

Channel 149 (5745MHz)



Channel 157 (5785MHz)



Channel 165 (5825MHz)

