



802.11ax-HE80 26dB Bandwidth


Channel 42 (5210MHz)

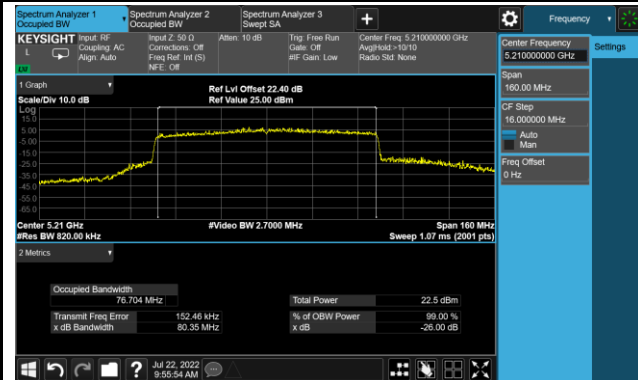


Channel 58 (5290MHz)

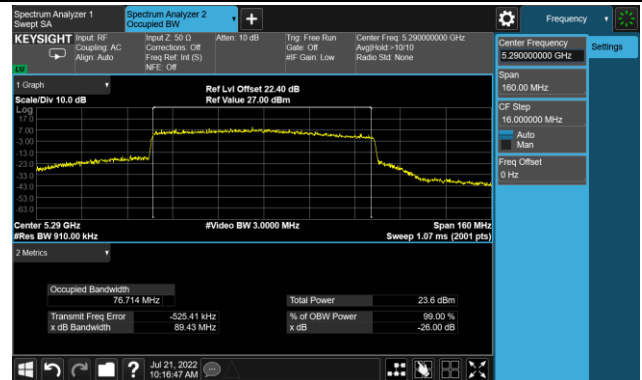


Channel 106 (5530MHz)

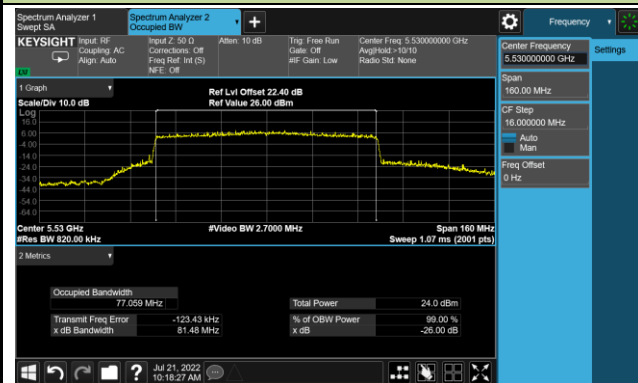


Channel 122 (5610MHz)

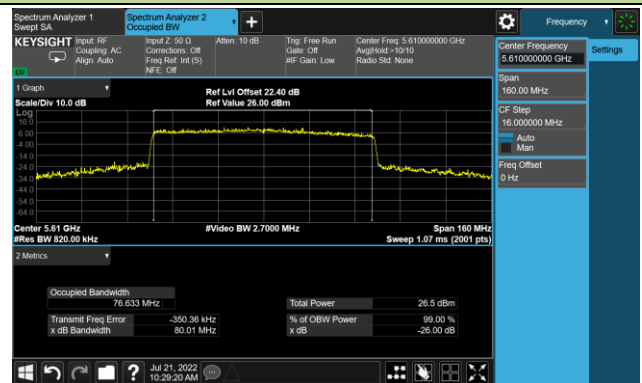

Channel 138 (5690MHz)

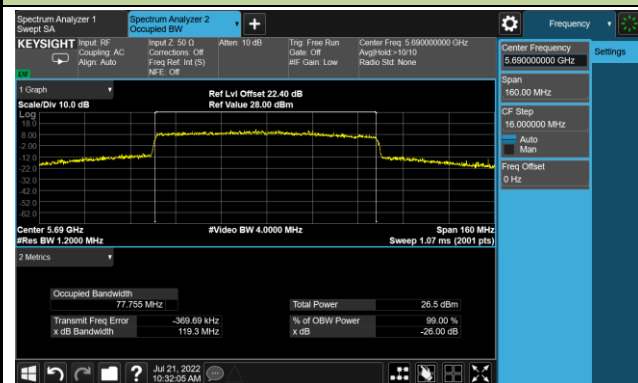


Channel 155 (5775MHz)

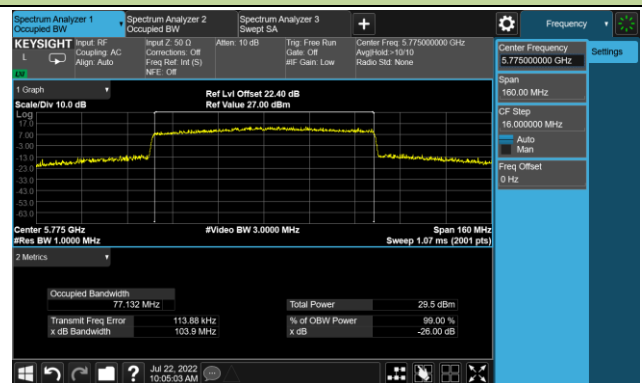


802.11ax-HE160 26dB Bandwidth

Channel 50 (5250MHz)

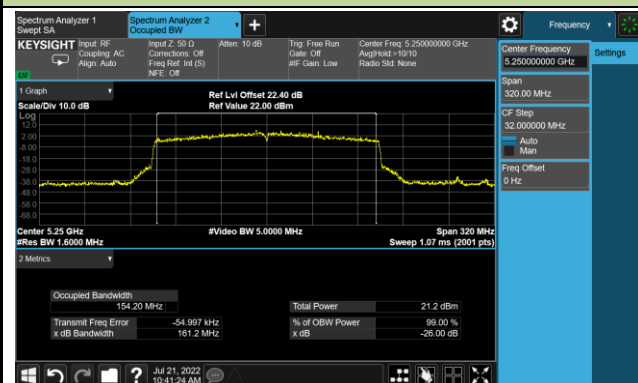

Channel 114 (5570MHz)

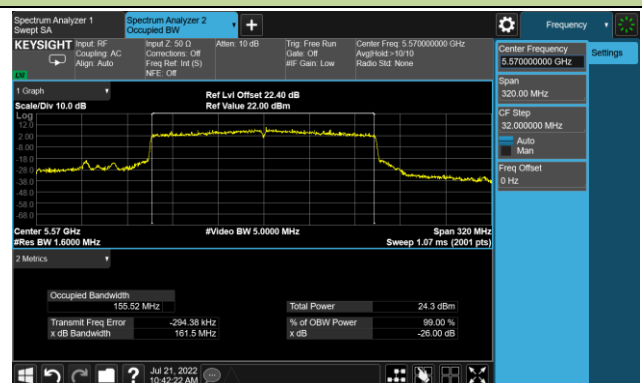


A.3 6dB Bandwidth Test Result

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2022-07-21 ~ 2022-07-22		


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
11a	6Mbps	149	5745	16.41	≥ 0.5
11a	6Mbps	157	5785	16.39	≥ 0.5
11a	6Mbps	165	5825	16.41	≥ 0.5
11ac-VHT20	MCS0	149	5745	17.63	≥ 0.5
11ac-VHT20	MCS0	157	5785	17.64	≥ 0.5
11ac-VHT20	MCS0	165	5825	17.63	≥ 0.5
11ac-VHT40	MCS0	151	5755	35.35	≥ 0.5
11ac-VHT40	MCS0	159	5795	35.12	≥ 0.5
11ac-VHT80	MCS0	155	5775	75.19	≥ 0.5
11ax-HE20	MCS0	149	5745	19.00	≥ 0.5
11ax-HE20	MCS0	157	5785	18.95	≥ 0.5
11ax-HE20	MCS0	165	5825	19.02	≥ 0.5
11ax-HE40	MCS0	151	5755	35.69	≥ 0.5
11ax-HE40	MCS0	159	5795	35.85	≥ 0.5
11ax-HE80	MCS0	155	5775	76.39	≥ 0.5

802.11a 6dB Bandwidth


Channel 149 (5745MHz)

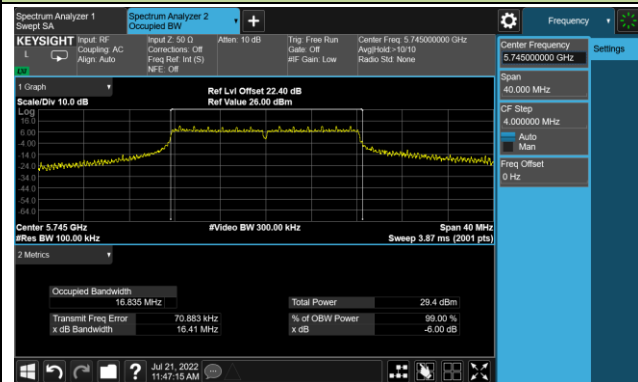

Channel 157 (5785MHz)

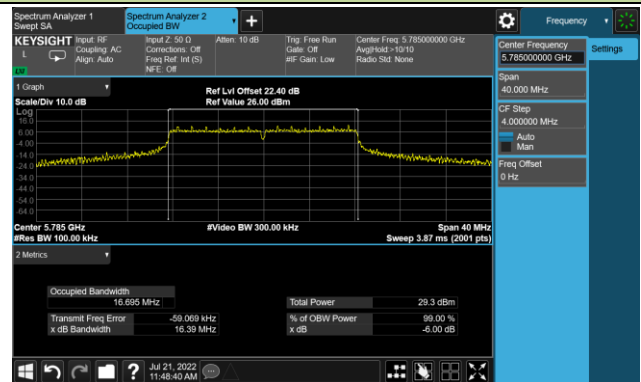


Channel 165 (5825MHz)

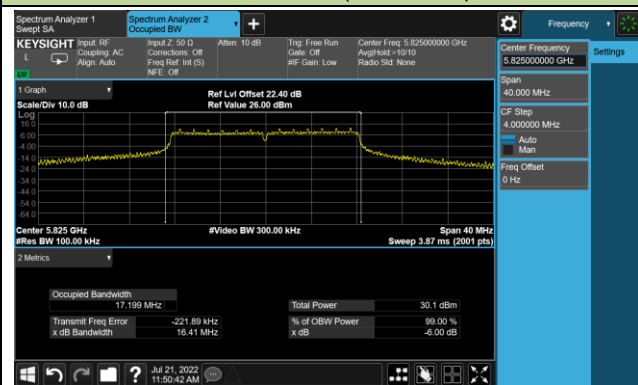


802.11ac-VHT20 6dB Bandwidth


Channel 149 (5745MHz)

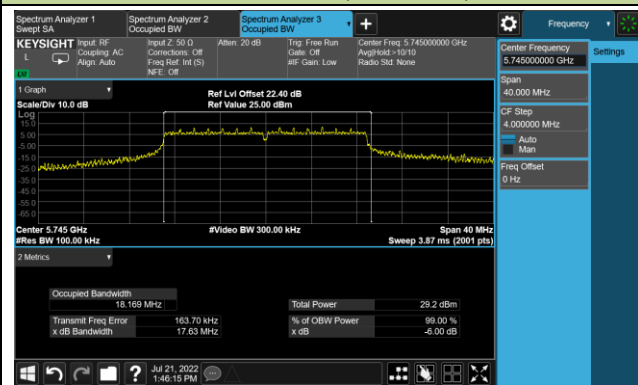

Channel 157 (5785MHz)

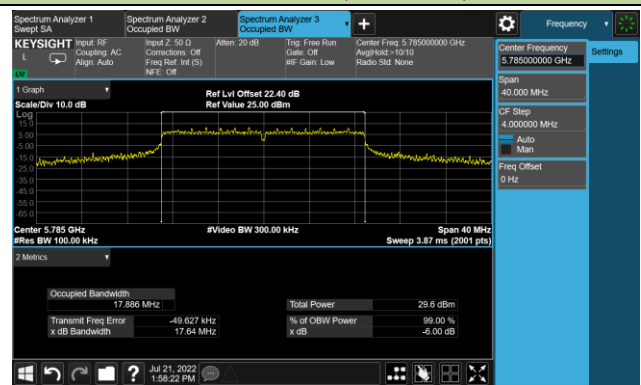


Channel 165 (5825MHz)

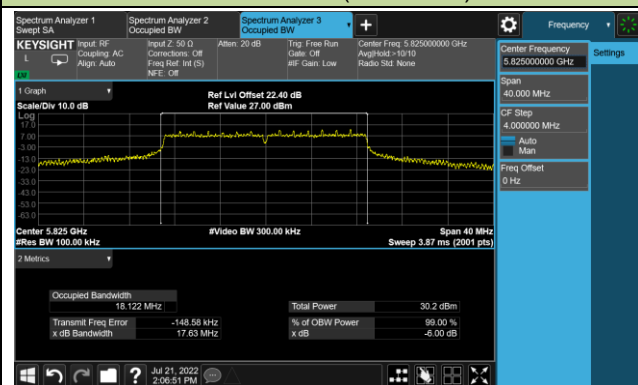


802.11ac-VHT40 6dB Bandwidth

Channel 151 (5755MHz)

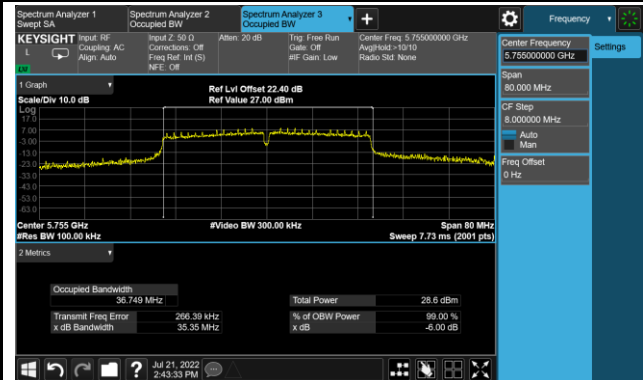


Channel 159 (5795MHz)

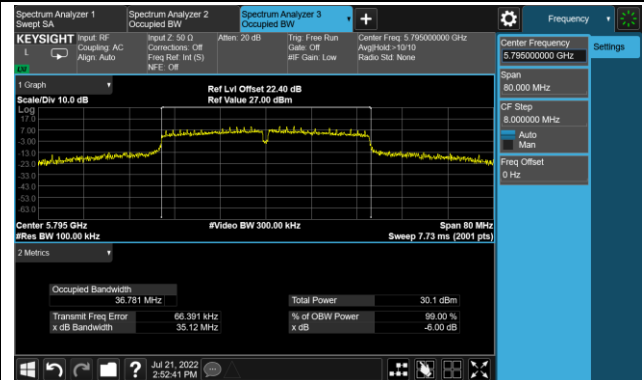


802.11ac-VHT80 6dB Bandwidth

Channel 155 (5775MHz)

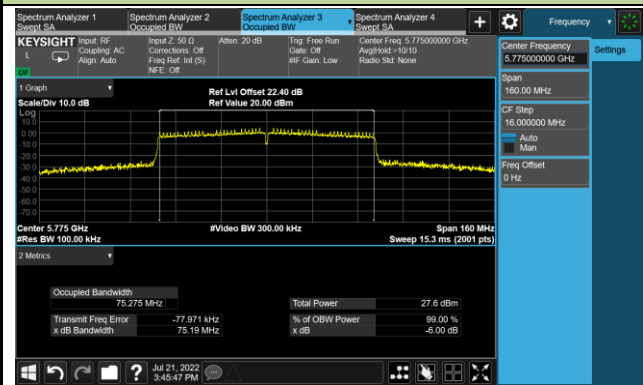


802.11ax-HE20 6dB Bandwidth


Channel 149 (5745MHz)

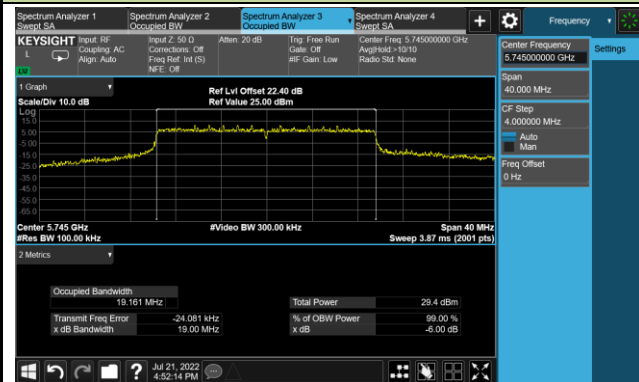

Channel 157 (5785MHz)

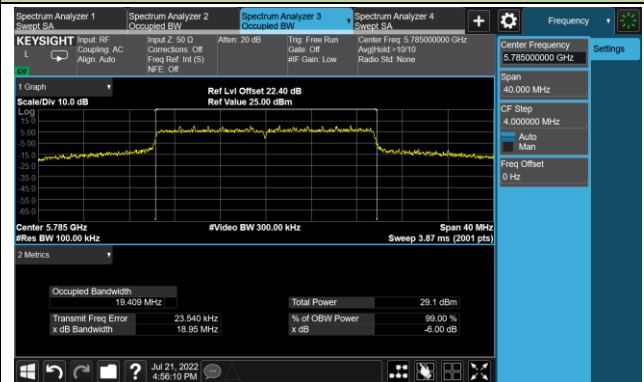


Channel 165 (5825MHz)

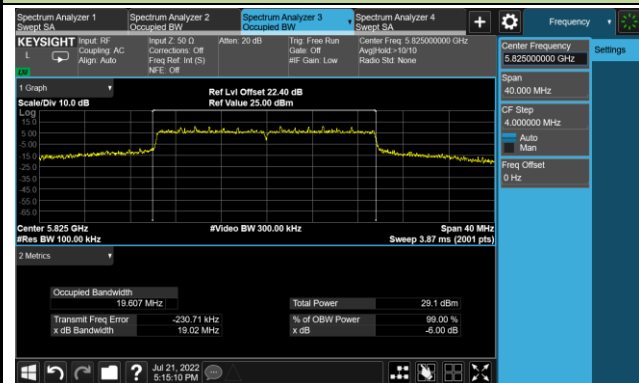



802.11ac-VHT40 6dB Bandwidth

Channel 151 (5755MHz)

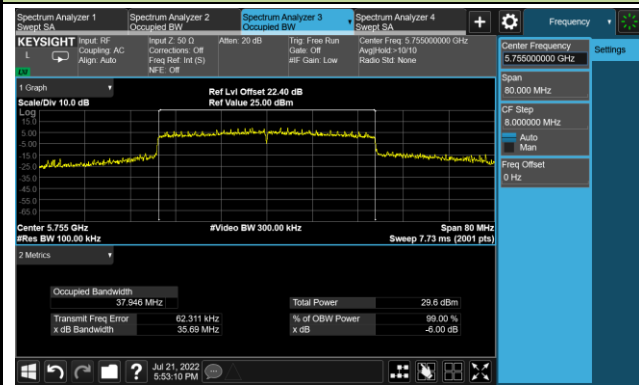

Channel 159 (5795MHz)

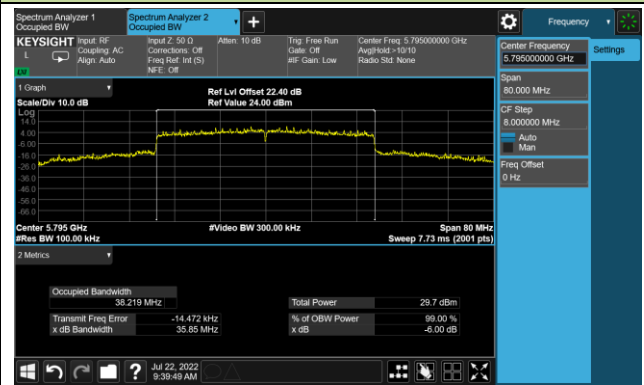

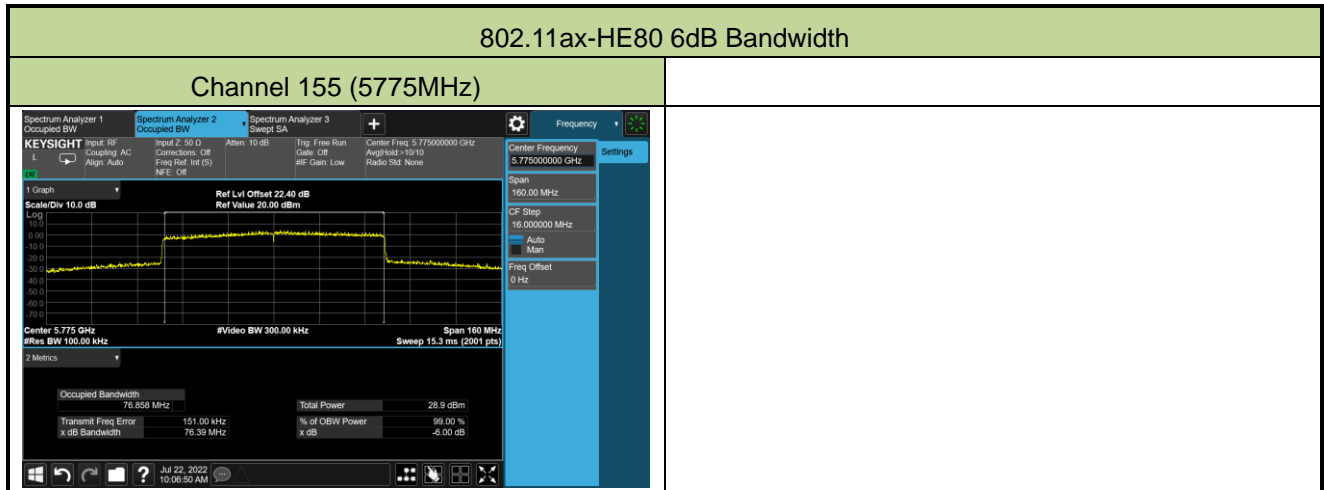

A.4 Output Power Test Result

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2022-07-19 ~ 2022-07-29		

Test Mode	Data Rate /MCS	Channel No.	Freq. (MHz)	Average Power (dBm)				Total Average Power (dBm)	Power Limit (dBm)
				Ant 0	Ant 1	Ant 2	Ant 3		
11a	6Mbps	36	5180	21.35	21.65	21.42	21.33	27.46	≤ 30.00
11a	6Mbps	44	5220	22.64	22.73	22.70	22.87	28.76	≤ 30.00
11a	6Mbps	48	5240	22.67	22.89	22.77	22.74	28.79	≤ 30.00
11a	6Mbps	52	5260	16.23	16.74	16.77	16.66	22.63	≤ 23.98
11a	6Mbps	60	5300	16.64	16.71	16.59	16.79	22.70	≤ 23.98
11a	6Mbps	64	5320	16.59	16.65	16.46	16.73	22.63	≤ 23.98
11a	6Mbps	100	5500	17.02	17.07	16.57	16.97	22.93	≤ 23.98
11a	6Mbps	116	5580	16.53	16.36	16.51	16.46	22.49	≤ 23.98
11a	6Mbps	140	5700	16.78	17.17	16.34	16.48	22.72	≤ 23.98
11a	6Mbps	144	5720	15.74	16.86	16.08	16.05	22.22	≤ 22.88
11a	6Mbps	149	5745	21.44	21.12	20.87	21.56	27.28	≤ 30.00
11a	6Mbps	157	5785	22.61	22.82	22.72	23.02	28.82	≤ 30.00
11a	6Mbps	165	5825	20.56	20.69	20.58	21.56	26.89	≤ 30.00
11ac-VHT20	MCS0	36	5180	21.68	21.92	22.32	21.54	27.90	≤ 30.00
11ac-VHT20	MCS0	44	5220	21.33	21.64	21.52	21.78	27.59	≤ 30.00
11ac-VHT20	MCS0	48	5240	21.97	22.11	22.09	22.29	28.14	≤ 30.00
11ac-VHT20	MCS0	52	5260	17.17	16.95	17.33	17.19	23.18	≤ 23.98
11ac-VHT20	MCS0	60	5300	16.68	16.71	16.62	16.94	22.76	≤ 23.98
11ac-VHT20	MCS0	64	5320	17.26	17.33	17.10	17.31	23.27	≤ 23.98
11ac-VHT20	MCS0	100	5500	17.07	17.12	16.48	17.00	22.95	≤ 23.98
11ac-VHT20	MCS0	116	5580	17.21	17.11	17.40	17.48	23.32	≤ 23.98
11ac-VHT20	MCS0	140	5700	17.08	17.31	16.46	16.58	22.89	≤ 23.98
11ac-VHT20	MCS0	144	5720	16.72	17.80	16.98	16.80	23.12	≤ 23.98
11ac-VHT20	MCS0	149	5745	22.83	22.71	22.51	23.08	28.81	≤ 30.00
11ac-VHT20	MCS0	157	5785	22.41	22.53	22.25	22.62	28.48	≤ 30.00
11ac-VHT20	MCS0	165	5825	21.20	21.30	21.17	22.28	27.53	≤ 30.00

Test Mode	Data Rate MCS	Channel No.	Freq. (MHz)	Average Power (dBm)				Total Average Power (dBm)	Power Limit (dBm)
				Ant 0	Ant 1	Ant 2	Ant 3		
				11ac-VHT40	MCS0	38	5190		
11ac-VHT40	MCS0	46	5230	22.29	22.35	22.20	22.12	28.26	≤ 30.00
11ac-VHT40	MCS0	54	5270	17.77	17.62	17.81	17.64	23.73	≤ 23.98
11ac-VHT40	MCS0	62	5310	17.76	17.66	17.49	17.58	23.64	≤ 23.98
11ac-VHT40	MCS0	102	5510	17.68	17.57	17.05	17.59	23.50	≤ 23.98
11ac-VHT40	MCS0	110	5550	17.23	17.22	18.01	17.79	23.60	≤ 23.98
11ac-VHT40	MCS0	134	5670	17.76	18.10	17.43	17.38	23.70	≤ 23.98
11ac-VHT40	MCS0	142	5710	17.68	18.13	17.77	17.61	23.82	≤ 23.98
11ac-VHT40	MCS0	151	5755	22.74	22.24	22.21	22.61	28.48	≤ 30.00
11ac-VHT40	MCS0	159	5795	23.55	23.33	23.72	23.61	29.58	≤ 30.00
11ac-VHT80	MCS0	42	5210	12.24	12.62	12.36	12.21	18.38	≤ 30.00
11ac-VHT80	MCS0	58	5290	15.34	15.24	15.45	15.17	21.32	≤ 23.98
11ac-VHT80	MCS0	106	5530	15.28	15.19	14.96	15.03	21.14	≤ 23.98
11ac-VHT80	MCS0	122	5610	17.80	17.36	18.13	17.87	23.82	≤ 23.98
11ac-VHT80	MCS0	138	5690	17.79	17.76	17.68	17.20	23.63	≤ 23.98
11ac-VHT80	MCS0	155	5775	19.56	19.18	19.10	19.59	25.38	≤ 30.00
11ac-VHT160	MCS0	50	5250	10.65	11.14	10.78	10.63	16.83	≤ 23.98
11ac-VHT160	MCS0	114	5570	13.11	13.09	13.64	13.36	19.33	≤ 23.98
11ax-HE20	MCS0	36	5180	19.71	20.28	19.98	20.05	26.03	≤ 30.00
11ax-HE20	MCS0	44	5220	22.13	22.17	22.41	22.49	28.32	≤ 30.00
11ax-HE20	MCS0	48	5240	22.77	22.37	22.87	22.73	28.71	≤ 30.00
11ax-HE20	MCS0	52	5260	17.54	17.11	17.85	18.00	23.66	≤ 23.98
11ax-HE20	MCS0	60	5300	17.41	17.50	17.26	17.65	23.48	≤ 23.98
11ax-HE20	MCS0	64	5320	17.42	17.61	17.29	17.54	23.49	≤ 23.98
11ax-HE20	MCS0	100	5500	17.95	18.02	17.38	17.88	23.84	≤ 23.98
11ax-HE20	MCS0	116	5580	17.45	17.17	17.43	17.76	23.48	≤ 23.98
11ax-HE20	MCS0	140	5700	17.93	18.12	17.09	17.03	23.59	≤ 23.98
11ax-HE20	MCS0	144	5720	17.08	17.94	17.12	17.03	23.33	≤ 23.77
11ax-HE20	MCS0	149	5745	22.62	22.54	22.15	22.69	28.53	≤ 30.00
11ax-HE20	MCS0	157	5785	21.36	21.50	21.12	21.64	27.43	≤ 30.00
11ax-HE20	MCS0	165	5825	19.92	20.08	19.78	20.70	26.16	≤ 30.00

Test Mode	Data Rate MCS	Channel No.	Freq. (MHz)	Average Power (dBm)				Total Average Power (dBm)	Power Limit (dBm)
				Ant 0	Ant 1	Ant 2	Ant 3		
				11ax-HE40	MCS0	38	5190		
11ax-HE40	MCS0	46	5230	23.04	22.88	22.86	22.72	28.90	≤ 30.00
11ax-HE40	MCS0	54	5270	18.01	17.60	17.93	17.73	23.84	≤ 23.98
11ax-HE40	MCS0	62	5310	17.87	17.79	17.67	17.86	23.82	≤ 23.98
11ax-HE40	MCS0	102	5510	17.95	17.73	17.22	17.69	23.68	≤ 23.98
11ax-HE40	MCS0	110	5550	17.52	17.33	18.25	18.18	23.86	≤ 23.98
11ax-HE40	MCS0	134	5670	17.73	18.28	17.73	17.69	23.89	≤ 23.98
11ax-HE40	MCS0	142	5710	17.44	18.09	17.58	17.31	23.64	≤ 23.98
11ax-HE40	MCS0	151	5755	22.68	22.41	22.44	22.87	28.62	≤ 30.00
11ax-HE40	MCS0	159	5795	22.55	22.59	22.80	22.86	28.72	≤ 30.00
11ax-HE80	MCS0	42	5210	13.77	14.27	13.96	14.02	20.03	≤ 30.00
11ax-HE80	MCS0	58	5290	15.16	15.09	14.97	14.94	21.06	≤ 23.98
11ax-HE80	MCS0	106	5530	15.11	15.04	14.78	15.09	21.03	≤ 23.98
11ax-HE80	MCS0	122	5610	17.61	17.21	17.94	17.42	23.57	≤ 23.98
11ax-HE80	MCS0	138	5690	18.03	17.87	17.77	17.48	23.81	≤ 23.98
11ax-HE80	MCS0	155	5775	20.02	19.78	19.33	19.81	25.76	≤ 30.00
11ax-HE160	MCS0	50	5250	12.31	12.55	12.37	12.02	18.34	≤ 23.98
11ax-HE160	MCS0	114	5570	14.51	14.14	14.96	14.46	20.55	≤ 23.98

Note 1: Total Average Power (dBm) = $10 \cdot \log \{ 10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)} + 10^{(\text{Ant 2 Average Power} / 10)} + 10^{(\text{Ant 3 Average Power} / 10)} \}$.

Note 2: For 5720MHz, Average Power Limit = $11 + 10 \cdot \log(5 + BW_{26\text{dB}} / 2)$.

A.5 Power Spectral Density Test Result

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2022-07-19 ~ 2022-07-29		
Test Item	Power Spectral Density (UNII-Band 1 & UNII-2a & UNII-2c)		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	AVPSD (dBm/ MHz)				Duty Cycle (%)	Total PSD (dBm/ MHz)	PSD Limit (dBm/ MHz)
				Ant 0	Ant 1	Ant 2	Ant 3			
11a	6Mbps	36	5180	8.833	9.076	9.019	9.241	96.14	15.236	≤ 17.00
11a	6Mbps	44	5220	9.455	9.898	9.659	9.824	96.14	15.904	≤ 17.00
11a	6Mbps	48	5240	10.197	10.031	9.988	10.094	96.14	16.270	≤ 17.00
11a	6Mbps	52	5260	4.497	4.246	4.098	4.560	96.14	10.546	≤ 11.00
11a	6Mbps	60	5300	4.469	4.319	4.376	4.408	96.14	10.585	≤ 11.00
11a	6Mbps	64	5320	4.442	4.610	4.158	4.694	96.14	10.672	≤ 11.00
11a	6Mbps	100	5500	4.707	4.651	4.399	4.737	96.14	10.817	≤ 11.00
11a	6Mbps	116	5580	4.304	4.389	4.374	4.524	96.14	10.590	≤ 11.00
11a	6Mbps	140	5700	4.434	5.150	4.261	4.323	96.14	10.749	≤ 11.00
11a	6Mbps	144	5720	4.029	4.665	4.147	3.902	96.14	10.387	≤ 11.00
11ac-VHT20	MCS0	36	5180	8.560	9.348	8.842	8.697	95.78	15.080	≤ 17.00
11ac-VHT20	MCS0	44	5220	8.726	9.262	8.905	9.309	95.78	15.265	≤ 17.00
11ac-VHT20	MCS0	48	5240	8.827	9.082	9.157	9.320	95.78	15.308	≤ 17.00
11ac-VHT20	MCS0	52	5260	4.368	4.418	4.678	4.978	95.78	10.825	≤ 11.00
11ac-VHT20	MCS0	60	5300	4.278	4.327	4.312	4.093	95.78	10.461	≤ 11.00
11ac-VHT20	MCS0	64	5320	4.880	4.664	4.513	4.646	95.78	10.886	≤ 11.00
11ac-VHT20	MCS0	100	5500	4.265	4.621	4.110	4.416	95.78	10.565	≤ 11.00
11ac-VHT20	MCS0	116	5580	4.761	4.705	4.657	4.486	95.78	10.861	≤ 11.00
11ac-VHT20	MCS0	140	5700	4.669	4.773	4.351	3.852	95.78	10.634	≤ 11.00
11ac-VHT20	MCS0	144	5720	4.274	4.799	4.410	4.200	95.78	10.635	≤ 11.00
11ac-VHT40	MCS0	38	5190	3.770	3.874	3.494	3.589	92.05	10.065	≤ 17.00
11ac-VHT40	MCS0	46	5230	7.256	7.063	6.485	6.687	92.05	13.264	≤ 17.00
11ac-VHT40	MCS0	54	5270	3.741	3.429	3.643	3.436	92.05	9.945	≤ 11.00
11ac-VHT40	MCS0	62	5310	3.898	3.577	3.655	3.428	92.05	10.023	≤ 11.00
11ac-VHT40	MCS0	102	5510	3.745	3.523	3.062	3.670	92.05	9.888	≤ 11.00
11ac-VHT40	MCS0	110	5550	3.466	3.208	3.950	3.774	92.05	9.989	≤ 11.00
11ac-VHT40	MCS0	134	5670	3.769	4.032	3.468	3.503	92.05	10.079	≤ 11.00
11ac-VHT40	MCS0	142	5710	3.876	4.144	4.004	3.720	92.05	10.319	≤ 11.00

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	AVPSD (dBm/ MHz)				Duty Cycle (%)	Total PSD (dBm/ MHz)	PSD Limit (dBm/M Hz)
				Ant 0	Ant 1	Ant 2	Ant 3			
				11ac-VHT80	MCS0	42	5210			
11ac-VHT80	MCS0	58	5290	-1.673	-1.645	-1.764	-1.558	85.08	5.063	≤ 11.00
11ac-VHT80	MCS0	106	5530	-1.465	-1.571	-2.425	-2.083	85.08	4.854	≤ 11.00
11ac-VHT80	MCS0	122	5610	1.295	0.814	1.485	1.073	85.08	7.896	≤ 11.00
11ac-VHT80	MCS0	138	5690	0.411	0.764	0.530	0.429	85.08	7.258	≤ 11.00
11ac-VHT160	MCS0	50	5250	-8.615	-7.632	-9.052	-8.805	76.51	-1.308	≤ 11.00
11ac-VHT160	MCS0	114	5570	-5.942	-5.985	-5.590	-6.045	76.51	1.297	≤ 11.00
11ax-HE20	MCS0	36	5180	6.472	7.225	6.188	6.637	94.65	12.907	≤ 17.00
11ax-HE20	MCS0	44	5220	8.555	8.604	8.772	8.867	94.65	14.961	≤ 17.00
11ax-HE20	MCS0	48	5240	9.406	9.327	9.413	9.393	94.65	15.644	≤ 17.00
11ax-HE20	MCS0	52	5260	4.386	4.378	4.727	4.545	94.65	10.771	≤ 11.00
11ax-HE20	MCS0	60	5300	4.633	4.411	4.357	4.481	94.65	10.731	≤ 11.00
11ax-HE20	MCS0	64	5320	4.756	4.577	4.711	4.463	94.65	10.888	≤ 11.00
11ax-HE20	MCS0	100	5500	4.629	4.739	4.336	4.736	94.65	10.872	≤ 11.00
11ax-HE20	MCS0	116	5580	4.581	4.650	4.339	4.347	94.65	10.741	≤ 11.00
11ax-HE20	MCS0	140	5700	4.543	4.628	4.437	4.283	94.65	10.734	≤ 11.00
11ax-HE20	MCS0	144	5720	4.125	4.518	4.405	4.238	94.65	10.584	≤ 11.00
11ax-HE40	MCS0	38	5190	2.663	3.066	2.657	2.701	90.61	9.224	≤ 17.00
11ax-HE40	MCS0	46	5230	7.244	7.161	7.237	7.063	90.61	13.626	≤ 17.00
11ax-HE40	MCS0	54	5270	3.500	3.357	3.459	3.441	90.61	9.888	≤ 11.00
11ax-HE40	MCS0	62	5310	3.649	3.445	3.574	3.687	90.61	10.039	≤ 11.00
11ax-HE40	MCS0	102	5510	3.730	3.577	3.154	3.456	90.61	9.933	≤ 11.00
11ax-HE40	MCS0	110	5550	3.421	3.112	4.007	3.856	90.61	10.062	≤ 11.00
11ax-HE40	MCS0	134	5670	3.856	4.290	3.651	3.634	90.61	10.315	≤ 11.00
11ax-HE40	MCS0	142	5710	3.668	3.895	3.751	3.185	90.61	10.082	≤ 11.00
11ax-HE80	MCS0	42	5210	-3.366	-2.867	-3.535	-3.367	83.84	3.510	≤ 17.00
11ax-HE80	MCS0	58	5290	-1.575	-1.805	-2.247	-2.004	83.84	4.885	≤ 11.00
11ax-HE80	MCS0	106	5530	-1.920	-1.932	-2.685	-1.994	83.84	4.665	≤ 11.00
11ax-HE80	MCS0	122	5610	0.824	0.405	0.940	0.436	83.84	7.444	≤ 11.00
11ax-HE80	MCS0	138	5690	0.921	1.240	0.820	0.548	83.84	7.675	≤ 11.00
11ax-HE160	MCS0	50	5250	-6.890	-6.356	-7.746	-7.175	75.90	0.205	≤ 11.00
11ax-HE160	MCS0	114	5570	-4.466	-5.120	-4.112	-5.095	75.90	2.541	≤ 11.00

Note: Total PSD (dBm/MHz) = $10 \cdot \log \{10^{(\text{Ant 0 AVPSD}/10)} + 10^{(\text{Ant 1 AVPSD}/10)} + 10^{(\text{Ant 2 AVPSD}/10)} + 10^{(\text{Ant 3 AVPSD}/10)}\} + 10 \cdot \log (1/\text{Duty cycle})$.


Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2022-07-19 ~ 2022-07-27		
Test Item	Power Spectral Density (UNII-Band 3)		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	AVPSD (dBm/ 510KHz)				Duty Cycle (%)	Total PSD (dBm/ 510KHz)	PSD Limit (dBm/ 500KHz)
				Ant 0	Ant 1	Ant 2	Ant 3			
11a	6Mbps	149	5745	7.130	7.080	6.633	7.185	96.14	13.204	≤ 30.00
11a	6Mbps	157	5785	7.757	7.820	7.908	8.379	96.14	14.165	≤ 30.00
11a	6Mbps	165	5825	6.340	6.473	6.301	7.499	96.14	12.874	≤ 30.00
11ac-VHT20	MCS0	149	5745	7.220	7.168	6.900	7.576	95.78	13.431	≤ 30.00
11ac-VHT20	MCS0	157	5785	6.986	7.203	6.925	7.298	95.78	13.314	≤ 30.00
11ac-VHT20	MCS0	165	5825	6.537	6.932	6.630	7.557	95.78	13.141	≤ 30.00
11ac-VHT40	MCS0	151	5755	4.165	4.132	3.662	4.073	92.05	10.393	≤ 30.00
11ac-VHT40	MCS0	159	5795	5.839	5.860	5.746	6.142	92.05	12.280	≤ 30.00
11ac-VHT80	MCS0	155	5775	-0.097	-0.525	-0.368	-0.113	85.08	6.450	≤ 30.00
11ax-HE20	MCS0	149	5745	6.737	6.601	6.534	6.932	94.65	12.963	≤ 30.00
11ax-HE20	MCS0	157	5785	6.484	6.678	6.360	7.025	94.65	12.903	≤ 30.00
11ax-HE20	MCS0	165	5825	5.007	5.419	4.841	5.935	94.65	11.581	≤ 30.00
11ax-HE40	MCS0	151	5755	4.980	4.666	4.887	5.045	90.61	11.346	≤ 30.00
11ax-HE40	MCS0	159	5795	5.838	5.573	5.893	6.019	90.61	12.283	≤ 30.00
11ax-HE80	MCS0	155	5775	0.126	-0.354	-0.367	0.114	83.84	6.672	≤ 30.00


Note: Total PSD (dBm/510kHz) = $10 \cdot \log \{ 10^{(\text{Ant 0 AV PSD}/10)} + 10^{(\text{Ant 1 AV PSD}/10)} + 10^{(\text{Ant 2 AV PSD}/10)} + 10^{(\text{Ant 3 AV PSD}/10)} \}$
 + $10 \cdot \log (1/\text{Duty cycle})$.

802.11a Power Spectral Density - Ant 0


Channel 36 (5180MHz)

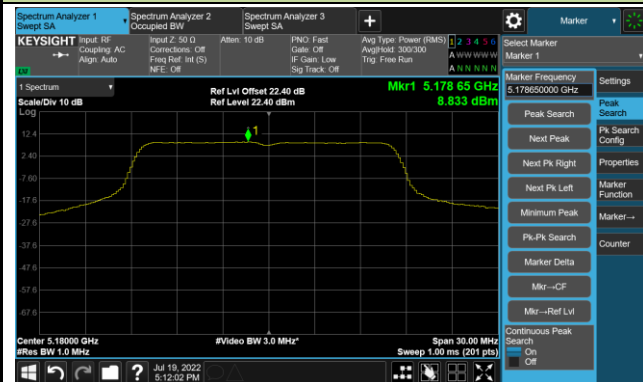

Channel 44 (5220MHz)

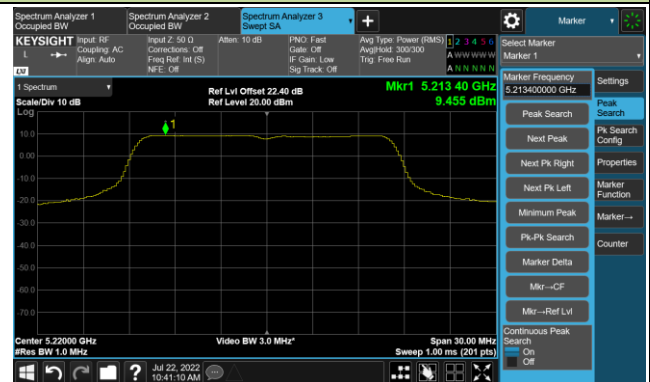

Channel 48 (5240MHz)

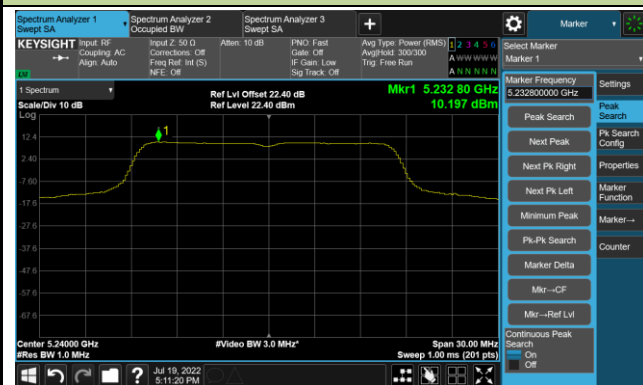

Channel 52 (5260MHz)




Channel 60 (5300MHz)




Channel 64 (5320MHz)



Channel 100 (5500MHz)

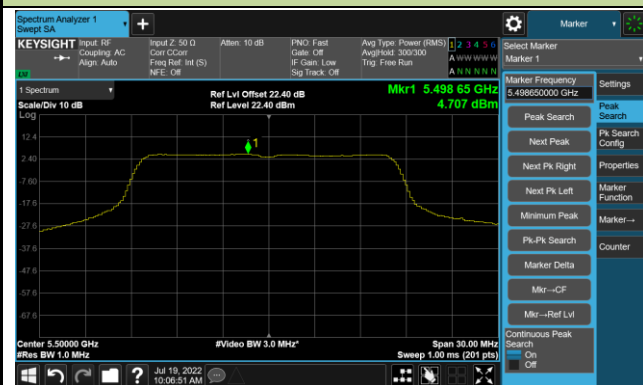


Channel 116 (5580MHz)

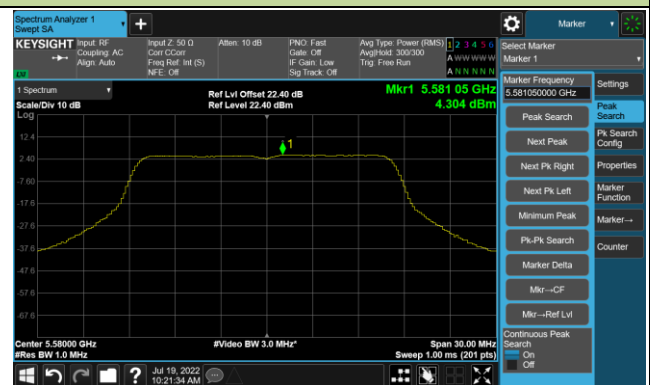

802.11a Power Spectral Density - Ant 0


Channel 140 (5700MHz)

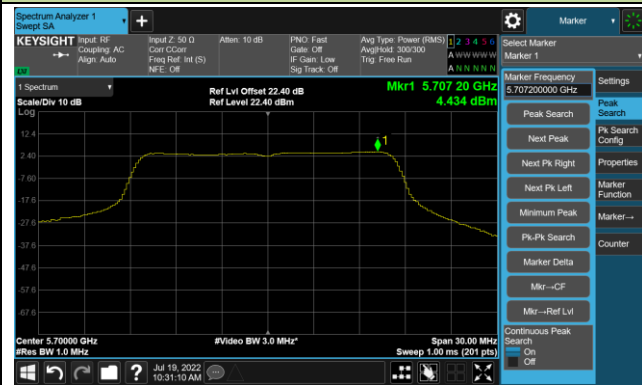


Channel 144 (5720MHz)




Channel 149 (5745MHz)

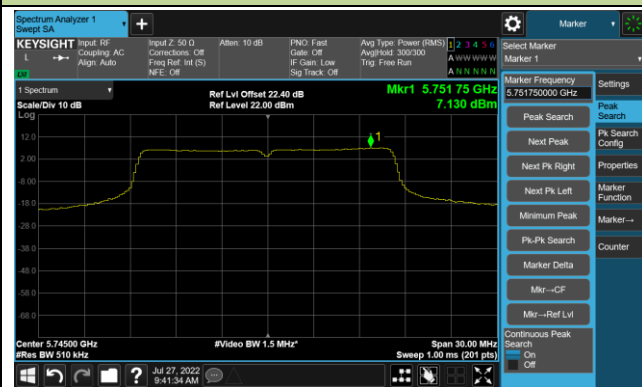

Channel 157 (5785MHz)

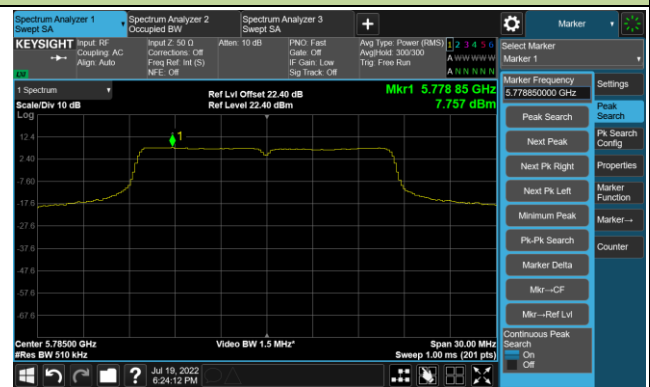


Channel 165 (5825MHz)

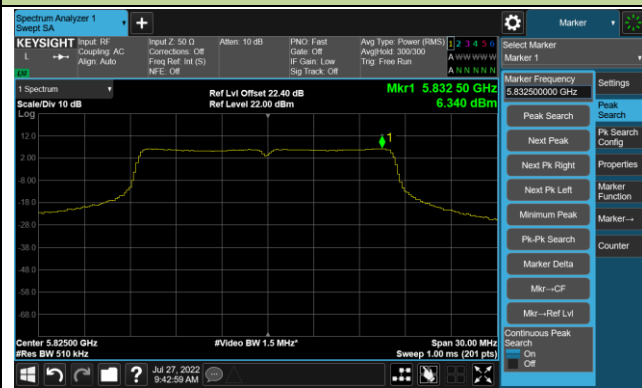

802.11ac-VHT20 Power Spectral Density - Ant 0


Channel 36 (5180MHz)

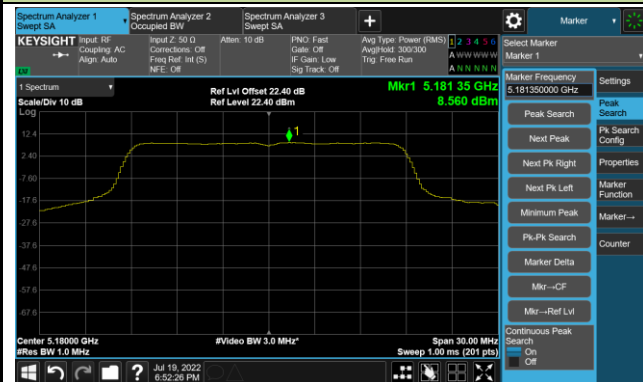

Channel 44 (5220MHz)



Channel 48 (5240MHz)

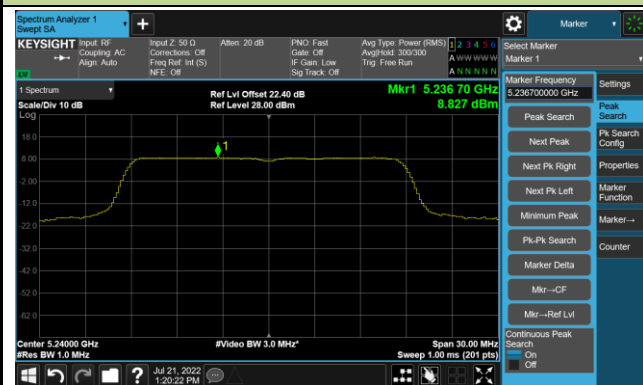

Channel 52 (5260MHz)




Channel 60 (5300MHz)



Channel 64 (5320MHz)



Channel 100 (5500MHz)

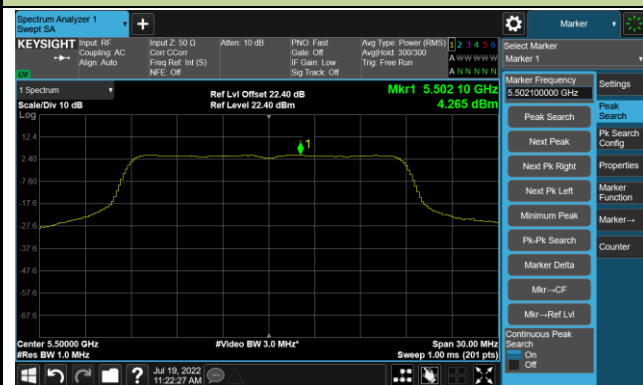

Channel 116 (5580MHz)



802.11ac-VHT20 Power Spectral Density - Ant 0


Channel 140 (5700MHz)




Channel 144 (5720MHz)




Channel 149 (5745MHz)

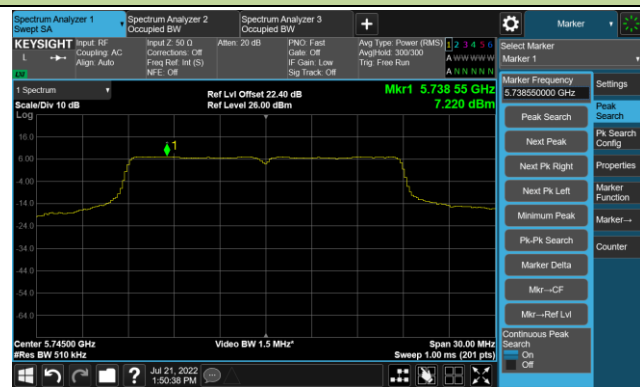

Channel 157 (5785MHz)

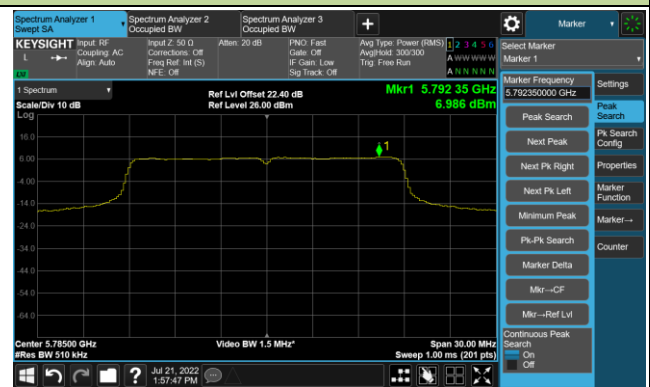


Channel 165 (5825MHz)

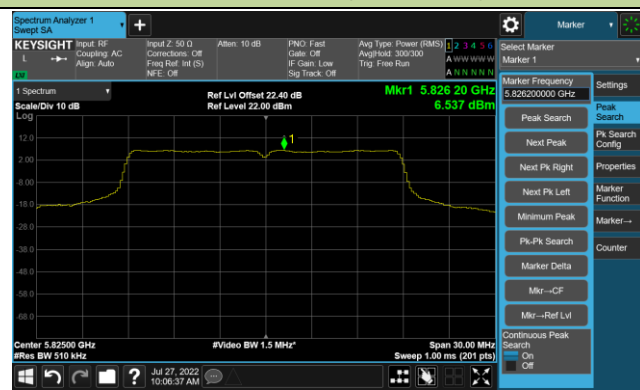


802.11ac-VHT40 Power Spectral Density - Ant 0


Channel 38 (5190MHz)

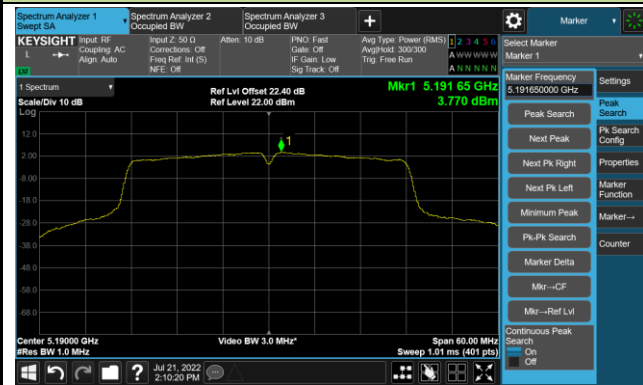

Channel 46 (5230MHz)

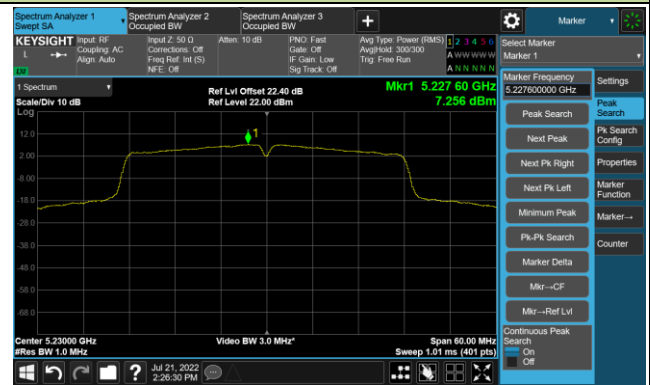


Channel 54 (5270MHz)

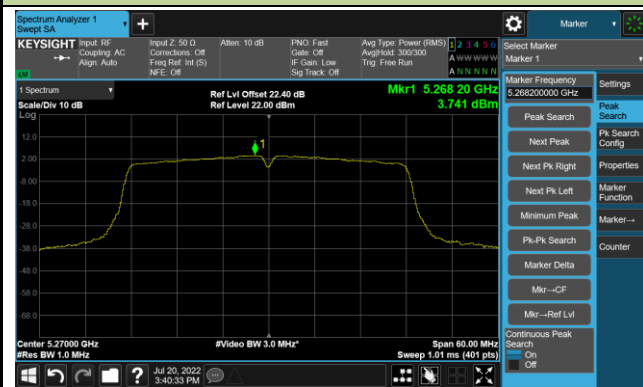


Channel 62 (5310MHz)




Channel 102 (5510MHz)

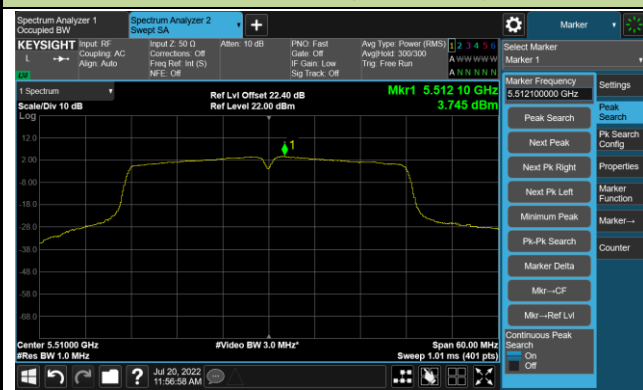


Channel 110 (5550MHz)

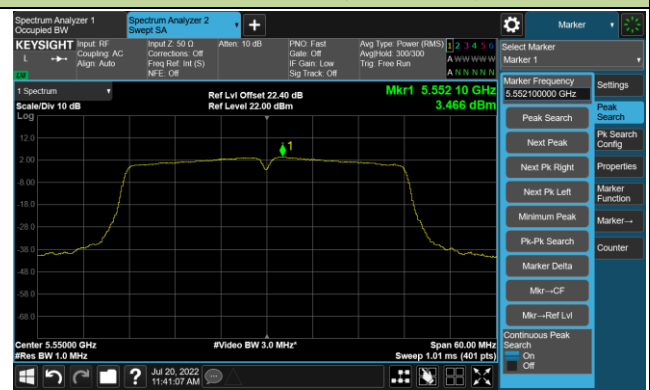

Channel 134 (5670MHz)

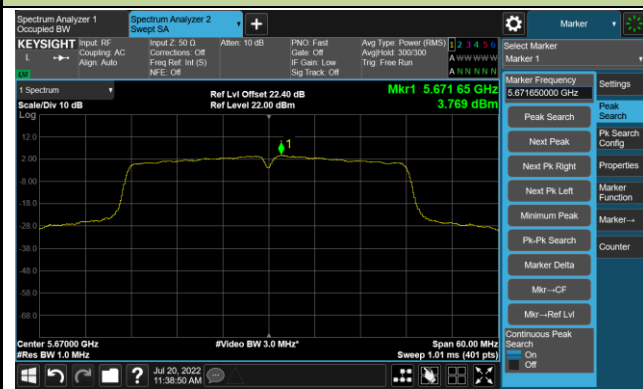


Channel 142 (5710MHz)

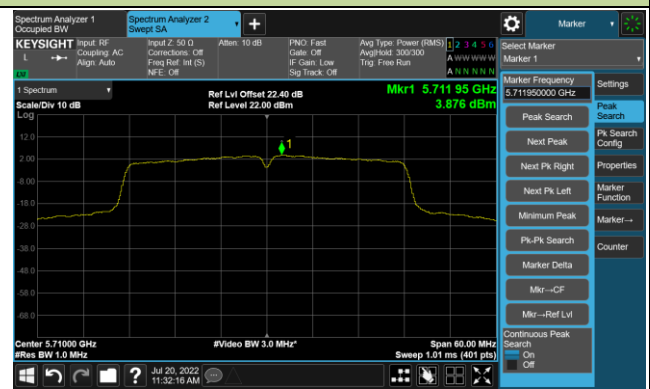


802.11ac-VHT40 Power Spectral Density - Ant 0

Channel 151 (5755MHz)

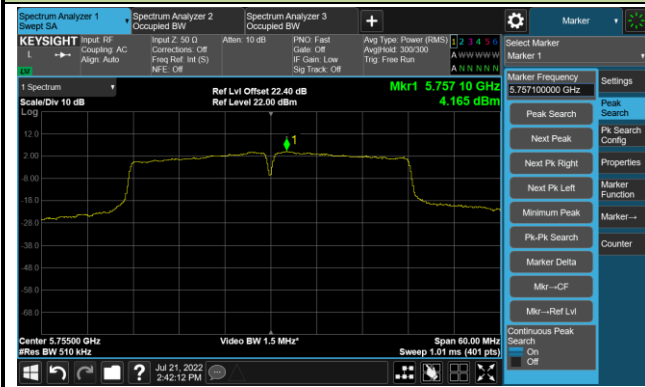


Channel 159 (5795MHz)

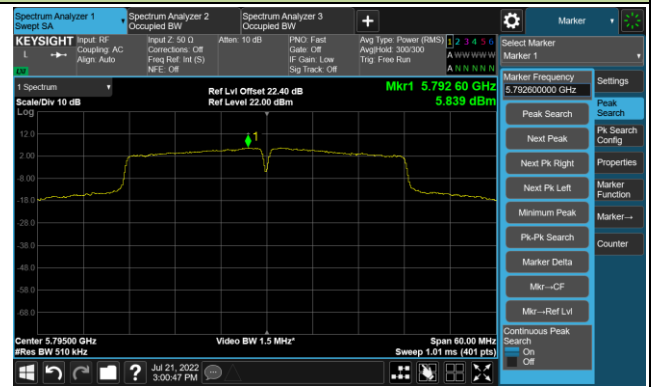


802.11ac-VHT80 Power Spectral Density - Ant 0

Channel 42 (5210MHz)

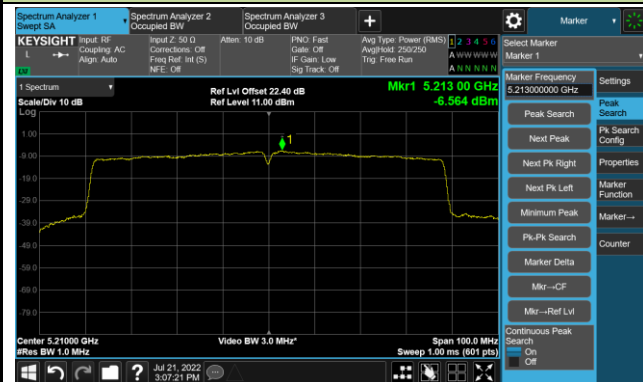


Channel 58 (5290MHz)

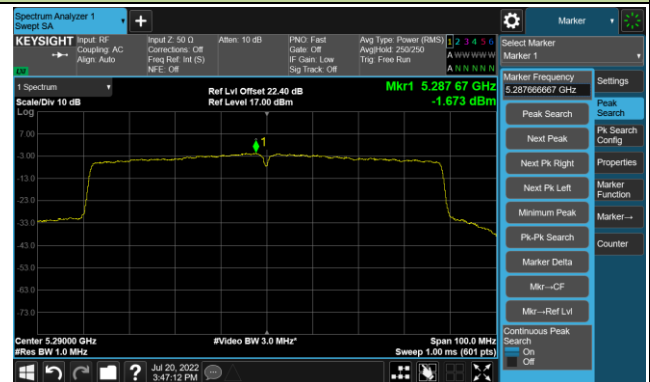

Channel 106 (5530MHz)



Channel 122 (5610MHz)

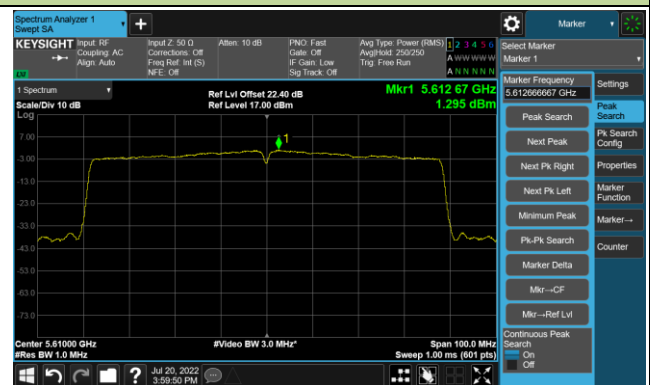

Channel 138 (5690MHz)



Channel 155 (5775MHz)



802.11ac-VHT160 Power Spectral Density - Ant 0

Channel 50 (5250MHz)




Channel 114 (5570MHz)



802.11ax-HE20 Power Spectral Density - Ant 0


Channel 36 (5180MHz)

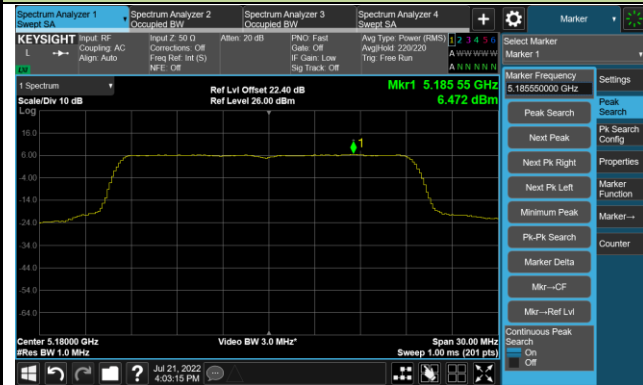

Channel 44 (5220MHz)




Channel 48 (5240MHz)

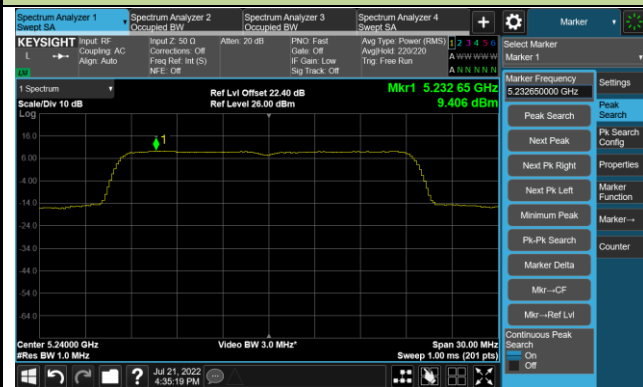

Channel 52 (5260MHz)



Channel 60 (5300MHz)

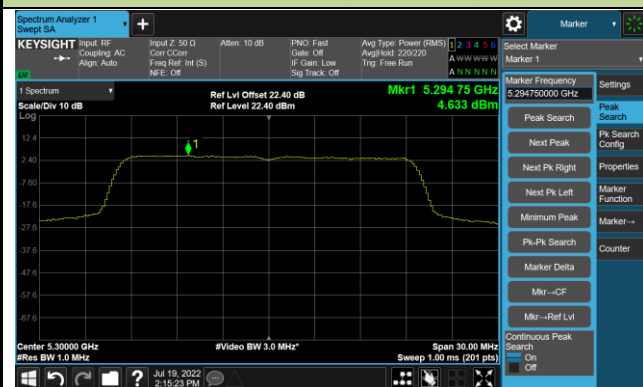

Channel 64 (5320MHz)



Channel 100 (5500MHz)



Channel 116 (5580MHz)



802.11ax-HE20 Power Spectral Density - Ant 0


Channel 140 (5700MHz)




Channel 144 (5720MHz)



Channel 149 (5745MHz)

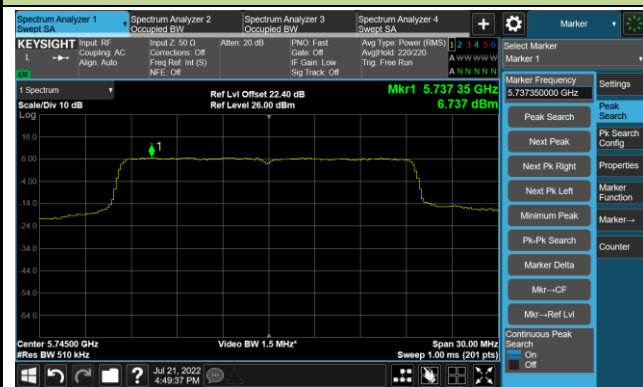

Channel 157 (5785MHz)

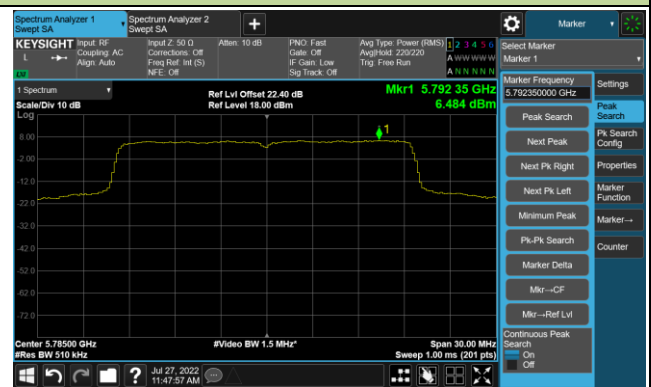

Channel 165 (5825MHz)

