



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

No. 1 Workshop, M-10, Middle section, Science & Technology Park,
Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053
Fax: +86 (0) 755 2671 0594
Email: ee.shenzhen@sgs.com

Report No.: SZEM131200649709
Page: 1 of 61

FCC REPORT

Application No.: SZEM1611010036CR
Applicant: Creative Labs Inc.
Manufacturer: Creative Labs Pte. Ltd.
Product Name: SOUND BLASTER ROAR CLASSIC LITE
Model No.(EUT): MF8172
Trade Mark: Creative
FCC ID: IBAMF8170
Standards: 47 CFR Part 15, Subpart C (2015)
Date of Receipt: 2016-11-25
Date of Test: 2016-11-29 to 2016-12-14
Date of Issue: 2016-12-14

Test Result:	PASS *
---------------------	---------------

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang
EMC Laboratory Manager



The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



2 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2016-12-14		Original

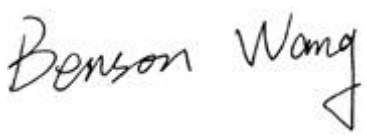Authorized for issue by:			
Tested By	 (Benson Wang)/Project Engineer	2016-12-14	
		Date	
Checked By	 (Eric Fu) /Reviewer	2016-12-14	
		Date	



3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 (2013)	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(1)	ANSI C63.10 (2013)	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2013)	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2013)	PASS
Radiated Spurious emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2013)	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2013)	PASS



4 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENTS	4
5 GENERAL INFORMATION	5
5.1 CLIENT INFORMATION	5
5.2 GENERAL DESCRIPTION OF EUT	5
5.3 TEST ENVIRONMENT	11
5.4 DESCRIPTION OF SUPPORT UNITS	11
5.5 TEST LOCATION	11
5.6 TEST FACILITY	12
5.7 DEVIATION FROM STANDARDS	12
5.8 ABNORMALITIES FROM STANDARD CONDITIONS	12
5.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER	12
5.10 EQUIPMENT LIST	13
6 TEST RESULTS AND MEASUREMENT DATA	15
6.1 ANTENNA REQUIREMENT	15
6.2 CONDUCTED PEAK OUTPUT POWER	16
6.3 BAND-EDGE FOR RF CONDUCTED EMISSIONS	23
6.4 SPURIOUS RF CONDUCTED EMISSIONS	30
6.5 OTHER REQUIREMENTS FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM	45
6.6 RADIATED SPURIOUS EMISSION	47
6.6.1 Radiated Emission below 1GHz	50
6.6.2 Transmitter Emission above 1GHz	52
6.7 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	54
7 PHOTOGRAPHS - EUT TEST SETUP	60
7.1 RADIATED EMISSION	60
7.2 RADIATED SPURIOUS EMISSION	61
8 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	61



5 General Information

5.1 Client Information

Applicant:	Creative Labs Inc.
Address of Applicant:	1901, McCarthy Boulevard, Milpitas, CA 95035, United States
Manufacturer:	Creative Labs Pte. Ltd.
Address of Manufacturer:	31, International Business Park, #03-01 Creative Resource, Singapore 609921

5.2 General Description of EUT

Product Name:	SOUND BLASTER ROAR CLASSIC LITE
Model No.:	MF8172
Trade Mark:	Creative
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	V3.0
Test Software of EUT:	Blue Test 3
Test Power Grade:	255, 46 (manufacturer declare)
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Sample Type:	Portable production
Antenna Type:	Integral
Antenna Gain:	4.11dBi
Power Supply	Battery Model No.:BJ-ACEXX-3KXKUX-01 Li-ion Battery: DC 7.56V 2950mAh 22.3Wh (Charge by adapter) Adapter Model:FJ-SW1501600N INPUT: AC100-240V 50/60Hz 0.6A Max OUTPUT: DC15V 1600mA
Test Voltage	AC 120V 60Hz



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM131200649709

Page: 6 of 61

Remark:

Model No.: MF8172

This test report (Ref. No.: SZEM131200649709) is only valid with the original test report (Ref. No.: SZEM131200649701, SZEM131200649703, SZEM131200649705 and SZEM131200649707).

Review this report and original report, the major change filed under this application is:

1. Add Model No: MF8172, Product Name: SOUND BLASTER ROAR CLASSIC LITE
2. SOUND BLASTER ROAR CLASSIC LITE is a derivative model of CREATIVE SOUND BLASTER ROAR PRO with changes in product features. No other electrical differences other than those stated below. Mechanical design and construction are identical for both models.

	BEFORE	AFTER
Model No.	MF8171	MF8172
Product Name	SOUND BLASTER ROAR PRO	SOUND BLASTER ROAR CLASSIC LITE
Function / Feature	- Speaker - NFC - Aux in - Bluetooth - micro SD card slot - MP3 player - USB Audio - USB external smart phone charging	- Speaker - NFC - Aux in - Bluetooth
Input rating	15VDC 1.6A	15VDC 1.2A
Original Power Adapter	Model: GPE024W-150160-Z Input: 100-240Vac 50/60Hz 0.75A, Output: 15Vdc 1.6A	N/A
Alternate Power Adapter	Model: FJ-SW1501600N Input: 100-240Vac 50/60Hz 0.6A, Output: 15Vdc 1.6A	Model: FJ-SW1501600N Input: 100-240Vac 50/60Hz 0.6A, Output: 15Vdc 1.6A
Multifunction Button, Volume up/down, ROAR Button, Power ON/Standby	MS2160A	MS2160A

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM131200649709

Page: 7 of 61

Board		
Main Board	MS2160B	MS2166B * For detail, pls refer to appendix
NFC Board	MS2160D	MS2160D
MP3 key board	MS2160E	Deleted

Review the SZEM131200649707 and original report, the major change filed under this application is:

1. Add alternate power adapter model FJ-SW1501600N.

	Before	After
	Model:GPE024W-150160-Z INPUT: AC 100-240V 50/60Hz 0.75A	Model:GPE024W-150160-Z INPUT: AC 100-240V 50/60Hz 0.75A OUTPUT: DC 15V 1600mA 24W
Adapter	OUTPUT: DC 15V 1600mA 24W	Model: FJ-SW1501600N Input: 100-240V, 50/60Hz 0.6A Max output: DC 15V,1600mA

Review SZEM131200649705 and original report, the major change filed under this application is:

3. Add Model No: MF8171, Product Name CREATIVE SOUND BLASTER ROAR PRO.
4. CREATIVE SOUND BLASTER ROAR PRO is a derivative model of CREATIVE SOUND BLASTER ROAR SR20A with changes in product features, antenna gain and adapter. No other electrical differences other than those stated below. Mechanical design and construction are identical for both models.

	BEFORE	AFTER
Model No	1. MF8170	1. MF8170 2. MF8171
Product Name	SOUND BLASTER ROAR SR20, SOUND BLASTER ROAR SR20A	SOUND BLASTER ROAR SR20 (Model No: MF8170) SOUND BLASTER ROAR SR20A (Model No: MF8170) SOUND BLASTER ROAR PRO (Model No: MF8171)
Antenna Gain	0.25 dBi	No change for SOUND BLASTER ROAR SR20 and SOUND BLASTER ROAR SR20A.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM131200649709

Page: 8 of 61

		SOUND BLASTER ROAR PRO: 4.11 dBi																		
Main Board	MS2160B REV A (0514116)	<p>No change for SOUND BLASTER ROAR SR20 and SOUND BLASTER ROAR SR20A.</p> <p>SOUND BLASTER ROAR PRO: MS2160B Rev A (081520) & MS2165B Rev 1P (001521): Add C334 (10PF), C335 (10PF), C336 (10PF), C337 (10PF), C339 (10PF) Change: R162 (12K to 100R), R203 (12K to 100R), R142 (22K to 15K), R143 (22K to 15K), R219 (10K to 12K), R116 (330K to 300K) Remove: R92 (10K), R93 (10K), C72 (820PF), C77 (820PF).</p> <table border="1"> <thead> <tr> <th>Version</th><th>Old Volume IC</th><th>New Volume IC</th></tr> </thead> <tbody> <tr> <td>Main board</td><td>MS2160B Rev A (081520)</td><td>MS2165B Rev 1P (001521)</td></tr> <tr> <td>Volume IC</td><td>MP61545 (U17)</td><td>NJU72431 (U4)</td></tr> <tr> <td>R214</td><td>Not Mounted</td><td>4K7</td></tr> <tr> <td>C313</td><td>Not Mounted</td><td>10UF</td></tr> <tr> <td>R324</td><td>Not Mounted</td><td>10K</td></tr> </tbody> </table>	Version	Old Volume IC	New Volume IC	Main board	MS2160B Rev A (081520)	MS2165B Rev 1P (001521)	Volume IC	MP61545 (U17)	NJU72431 (U4)	R214	Not Mounted	4K7	C313	Not Mounted	10UF	R324	Not Mounted	10K
Version	Old Volume IC	New Volume IC																		
Main board	MS2160B Rev A (081520)	MS2165B Rev 1P (001521)																		
Volume IC	MP61545 (U17)	NJU72431 (U4)																		
R214	Not Mounted	4K7																		
C313	Not Mounted	10UF																		
R324	Not Mounted	10K																		
Mp3 Key Board	<p>SOUND BLASTER ROAR SR20: MS2160E, REV A (031404)</p> <p>SOUND BLASTER ROAR SR20A: MS2160E, REV A (041422)</p>	<p>No change for SOUND BLASTER ROAR SR20 and SOUND BLASTER ROAR SR20A.</p> <p>SOUND BLASTER ROAR PRO: MS2165E, REV A (011520).</p>																		
Product Feature	<p>SOUND BLASTER ROAR SR20: Loud Sounds</p> <p>SOUND BLASTER ROAR SR20A: Remove Loud Sounds. Add Link Security and Tera Bass.</p>	<p>No change for SOUND BLASTER ROAR SR20 and SOUND BLASTER ROAR SR20A.</p> <p>SOUND BLASTER ROAR PRO: Remove Link Security. Add EQ – Warm / Neutral / Energetic.</p>																		



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM131200649709

Page: 9 of 61

Considering to the difference, pre-scan were performed on the sample in this report to find the items which can be influential to the result in the original test report for fully retest.

Therefore in this report Conducted Peak Output Power, Band-edge for RF Conducted Emissions, RF Conducted Spurious Emissions, Radiated Spurious emissions, Restricted bands around fundamental frequency (Radiated Emission) were fully retested on model MF8172 and shown the data in this report, other tests please refer to original report SZEM131200649701.

Additionally, just updated the below standard.

Original report standard

47 CFR Part 15, Subpart C (2013)

The newest report standard

47 CFR Part 15, Subpart C (2015)



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM131200649709

Page: 10 of 61

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
2	2404MHz	22	2424MHz	42	2444MHz	62	2464MHz
3	2405MHz	23	2425MHz	43	2445MHz	63	2465MHz
4	2406MHz	24	2426MHz	44	2446MHz	64	2466MHz
5	2407MHz	25	2427MHz	45	2447MHz	65	2467MHz
6	2408MHz	26	2428MHz	46	2448MHz	66	2468MHz
7	2409MHz	27	2429MHz	47	2449MHz	67	2469MHz
8	2410MHz	28	2430MHz	48	2450MHz	68	2470MHz
9	2411MHz	29	2431MHz	49	2451MHz	69	2471MHz
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
12	2414MHz	32	2434MHz	52	2454MHz	72	2474MHz
13	2415MHz	33	2435MHz	53	2455MHz	73	2475MHz
14	2416MHz	34	2436MHz	54	2456MHz	74	2476MHz
15	2417MHz	35	2437MHz	55	2457MHz	75	2477MHz
16	2418MHz	36	2438MHz	56	2458MHz	76	2478MHz
17	2419MHz	37	2439MHz	57	2459MHz	77	2479MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2441MHz
The Highest channel	2480MHz



5.3 Test Environment

Operating Environment:	
Temperature:	25.0 °C
Humidity:	55 % RH
Atmospheric Pressure:	1015 mbar

5.4 Description of Support Units

The EUT has been tested independent unit.

5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.
518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

- **VCCI**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

- **FCC – Registration No.: 556682**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

- **Industry Canada (IC)**

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.



5.10 Equipment List

RF connected test						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
1	DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2016-10-09	2017-10-09
2	Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2016-10-09	2017-10-09
3	Signal Generator	Rohde & Schwarz	SML03	SEM006-02	2016-04-25	2017-04-25
4	Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2016-10-09	2017-10-09

RE in Chamber						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2016-05-13	2017-05-13
2	EXA Spectrum Analyzer	Agilent Technologies Inc	N9010A	SEM004-09	2016-07-19	2017-07-19
3	BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-02	2014-11-15	2017-11-15
4	Amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2016-10-09	2017-10-09
5	Horn Antenna (1-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2015-06-14	2018-06-14
6	Horn Antenna (18-26GHz)	ETS-Lindgren	3160	SEM003-12	2014-11-24	2017-11-24
7	Horn Antenna(26GHz-40GHz)	A.H.Systems, inc.	SAS-573	SEM003-13	2015-02-12	2018-02-12
8	Low Noise Amplifier	Black Diamond Series	BDLNA-0118-352810	SEM005-05	2016-10-09	2017-10-09
9	Band filter	Amindeon	Asi 3314	SEM023-01	N/A	N/A



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch


Report No.: SZEM131200649709

Page: 14 of 61

RE in Chamber						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2016-05-13	2017-05-13
2	EMI Test Receiver	Agilent Technologies	N9038A	SEM004-05	2016-10-09	2017-10-09
3	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEM003-01	2014-11-01	2017-11-01
4	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEM003-11	2015-10-17	2018-10-17
5	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEM003-12	2014-11-24	2017-11-24
6	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEM005-01	2016-04-25	2017-04-25
7	Band filter	Amindeon	Asi 3314	SEM023-01	N/A	N/A
8	DC Power Supply	Zhao Xin	RXN-305D	SEM011-02	2016-10-09	2017-10-09
9	Loop Antenna	Beijing Daze	ZN30401	SEM003-09	2015-05-13	2018-05-13


6 Test results and Measurement Data

6.1 Antenna Requirement

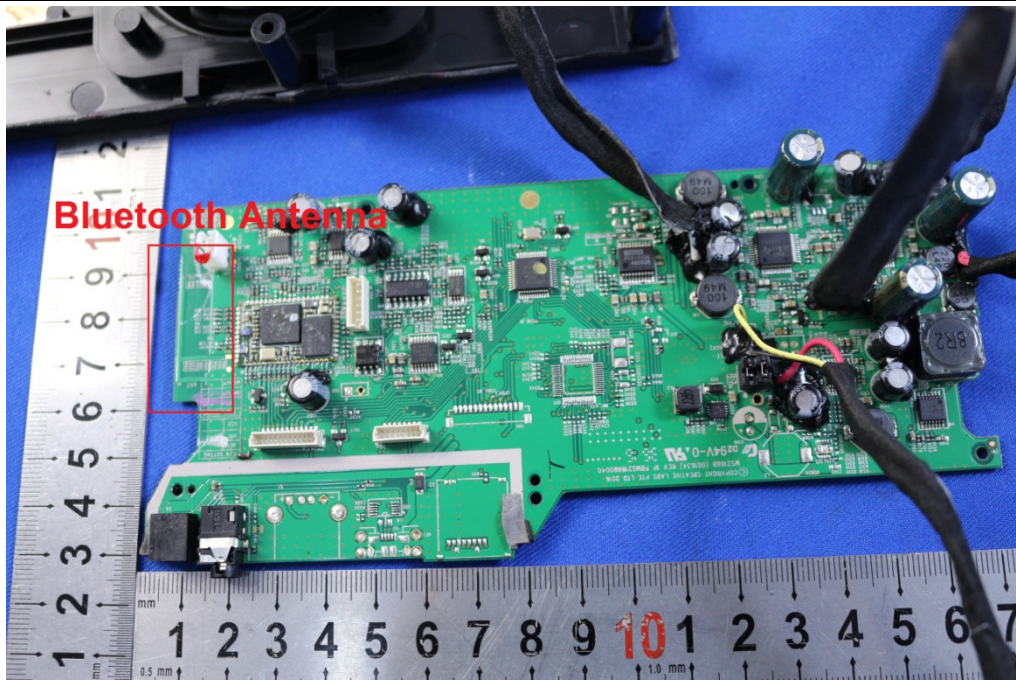Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
<p>15.203 requirement:</p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(b) (4) requirement:</p> <p>The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>	
EUT Antenna:	
<p>The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 4.11dBi.</p>	



6.2 Conducted Peak Output Power

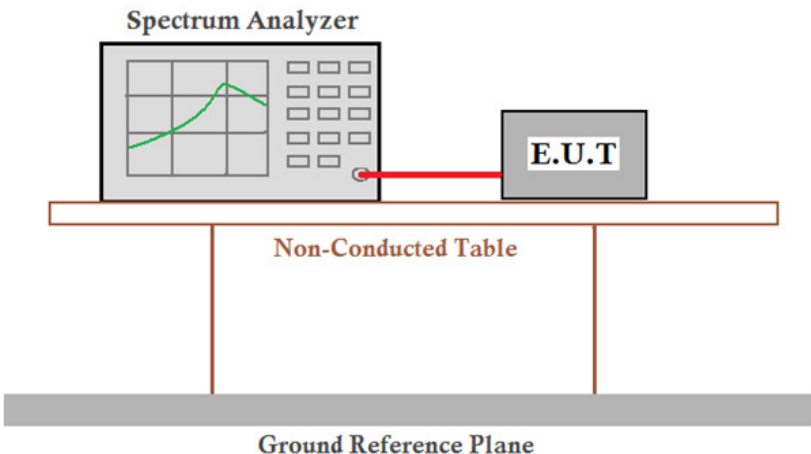Test Requirement:	47 CFR Part 15C Section 15.247 (b)(1)
Test Method:	ANSI C63.10:2013 Section 7.8.5
Test Setup:	 <p><i>Remark:</i> Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.</p>
Limit:	20.97dBm
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type.
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM131200649709

Page: 17 of 61

Measurement Data

GFSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	-1.41	20.97	Pass
Middle	-1.60	20.97	Pass
Highest	-2.16	20.97	Pass
$\pi/4$ DQPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	-1.50	20.97	Pass
Middle	-1.35	20.97	Pass
Highest	-2.29	20.97	Pass
8DPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	-1.48	20.97	Pass
Middle	-1.13	20.97	Pass
Highest	-2.13	20.97	Pass




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM131200649709


Page: 18 of 61

Test plot as follows:

Test mode:	GFSK	Test channel:	Lowest
------------	------	---------------	--------

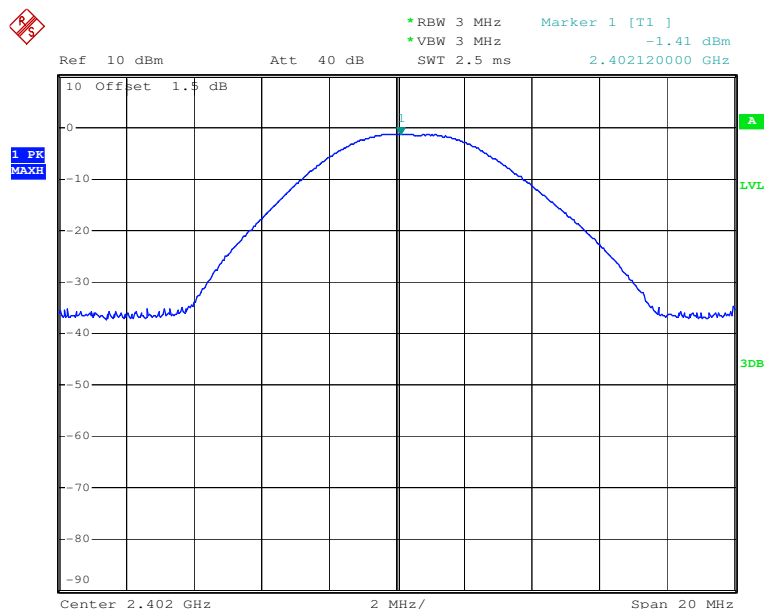

Test mode:	GFSK	Test channel:	Middle
------------	------	---------------	--------

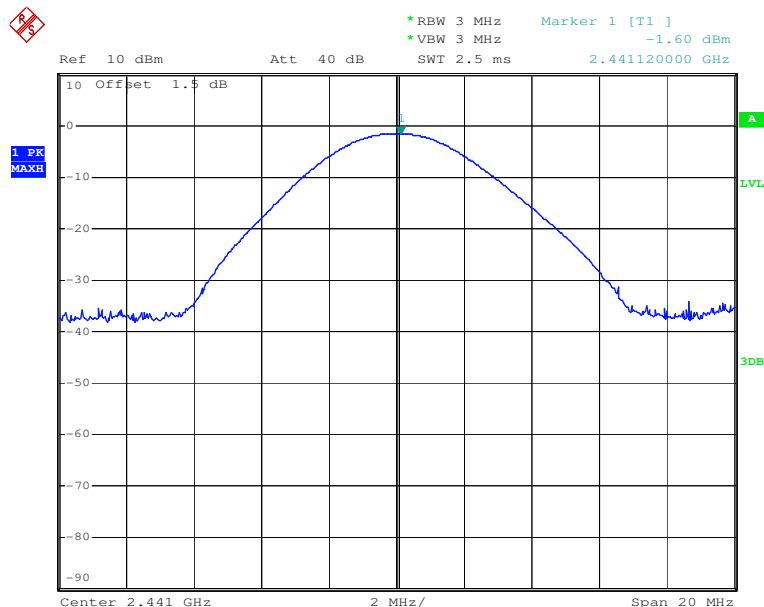




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZEM131200649709

Page: 19 of 61

Test mode:	GFSK	Test channel:	Highest
------------	------	---------------	---------

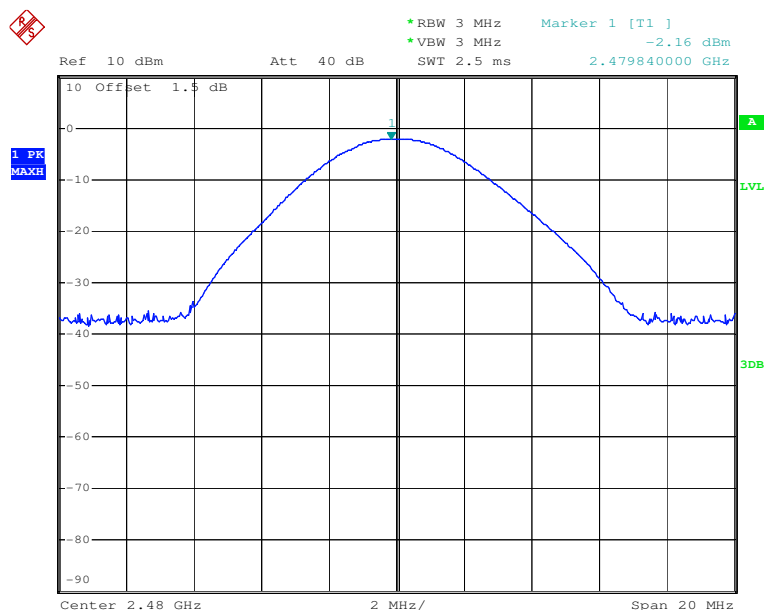

Test mode:	$\pi/4$ DQPSK	Test channel:	Lowest
------------	---------------	---------------	--------

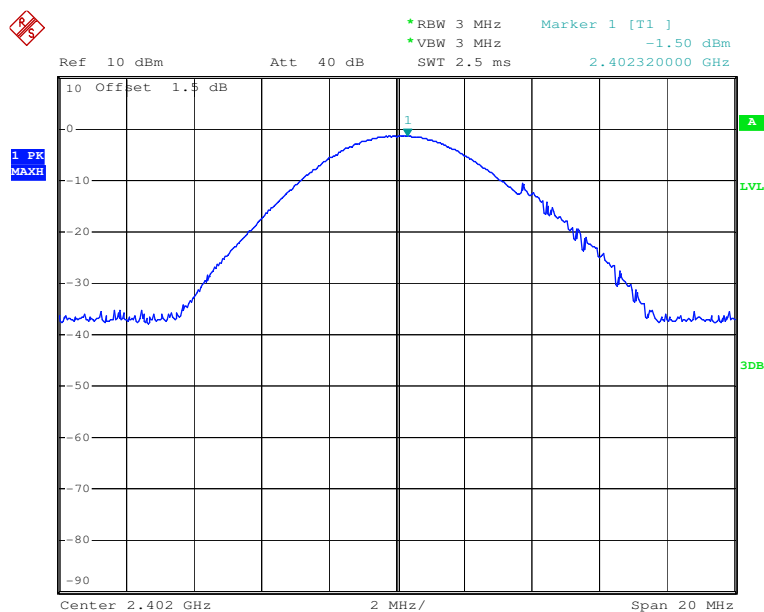




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZEM131200649709

Page: 20 of 61

Test mode:	$\pi/4$ DQPSK	Test channel:	Middle
------------	---------------	---------------	--------

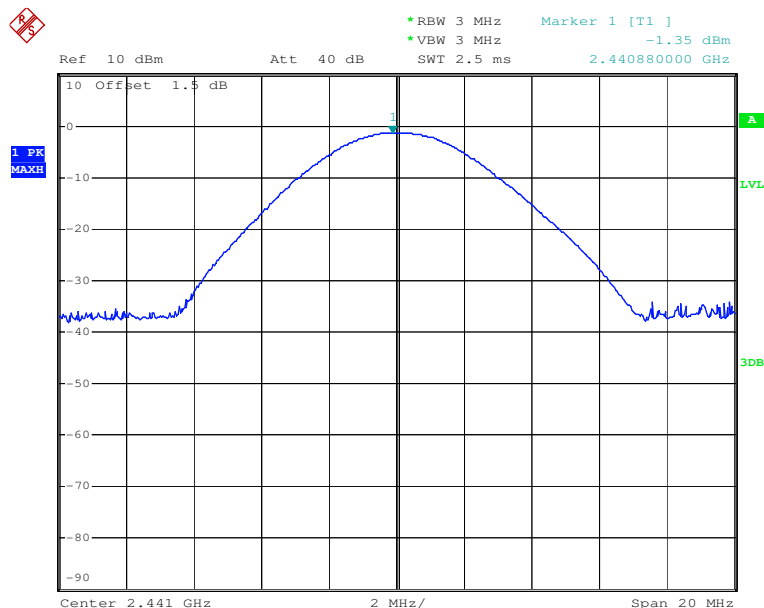

Test mode:	$\pi/4$ DQPSK	Test channel:	Highest
------------	---------------	---------------	---------

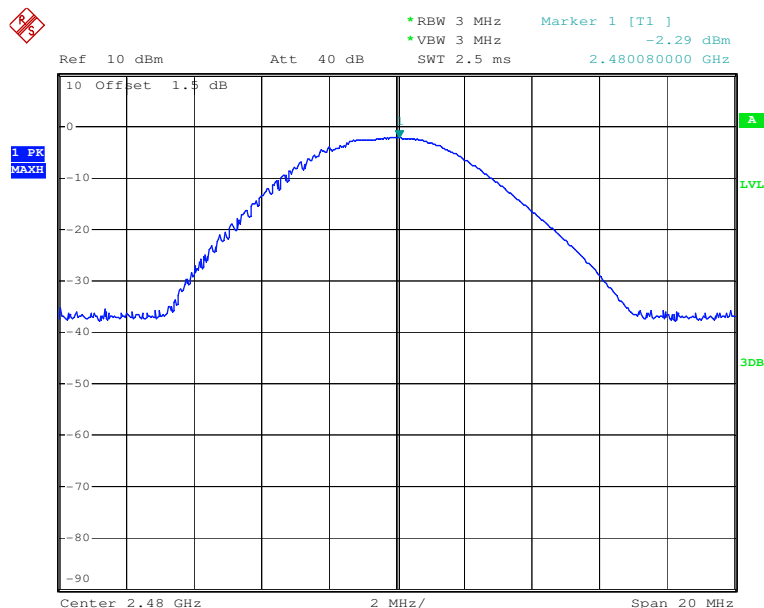




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZEM131200649709

Page: 21 of 61

Test mode:	8DPSK	Test channel:	Lowest
------------	-------	---------------	--------

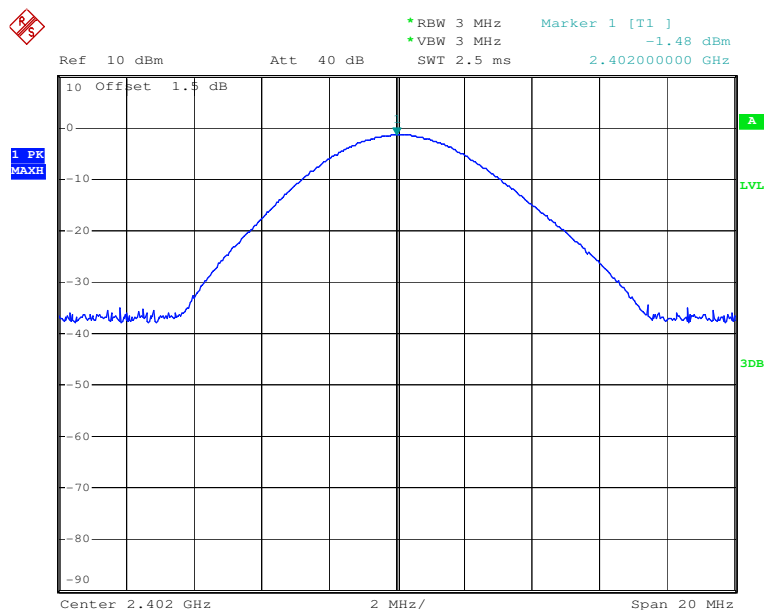

Test mode:	8DPSK	Test channel:	Middle
------------	-------	---------------	--------

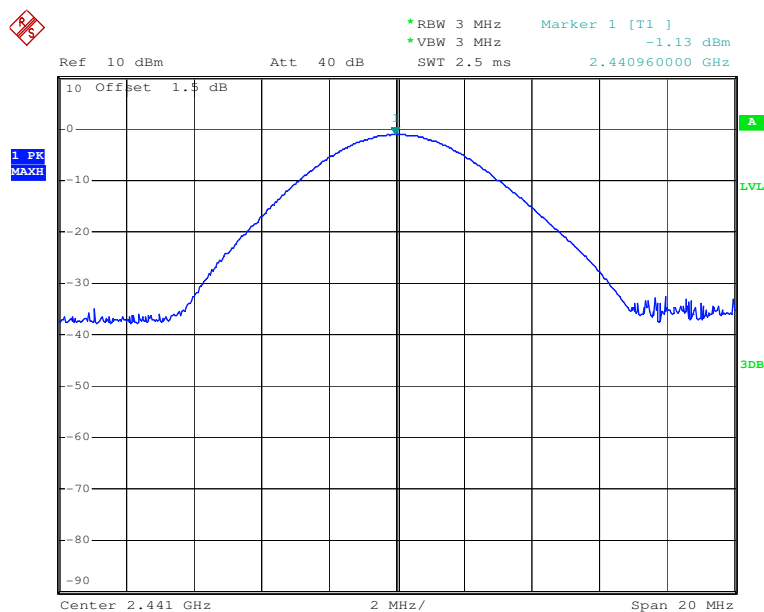




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM131200649709


Page: 22 of 61

Test mode:	8DPSK	Test channel:	Highest
------------	-------	---------------	---------

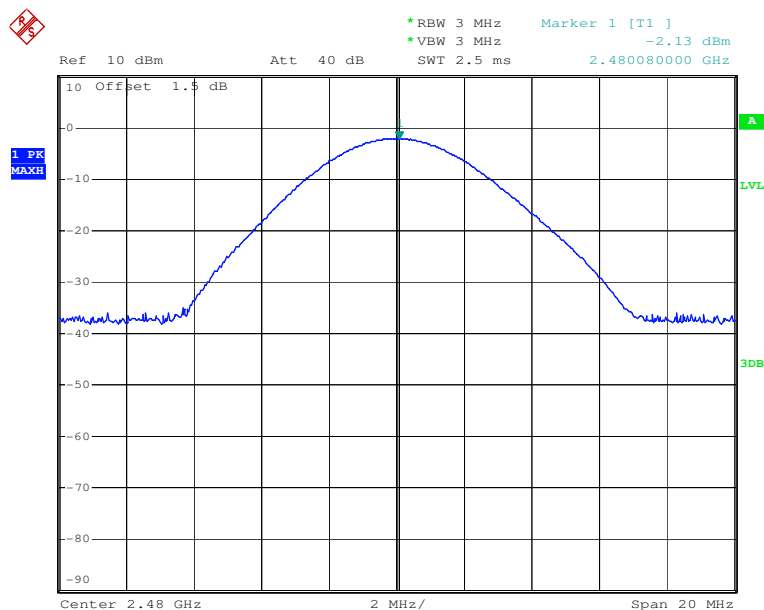



6.3 Band-edge for RF Conducted Emissions

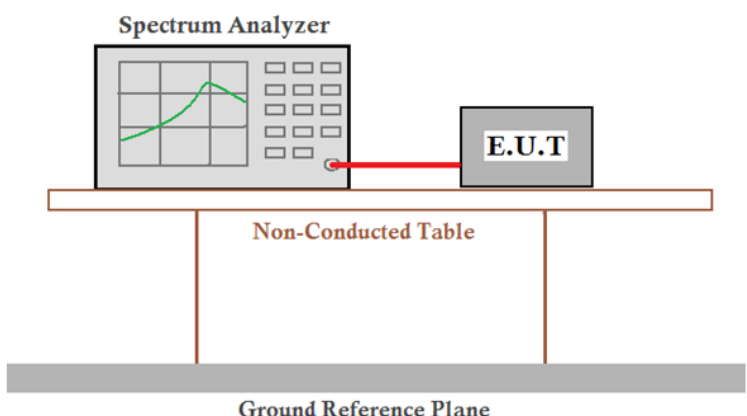Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 Section 7.8.6
Test Setup:	 <p>Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.</p>
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Exploratory Test Mode:	Hopping and Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass





SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM131200649709

Page: 24 of 61

Test plot as follows:

Test mode:	GFSK	Test channel:	Lowest
------------	------	---------------	--------

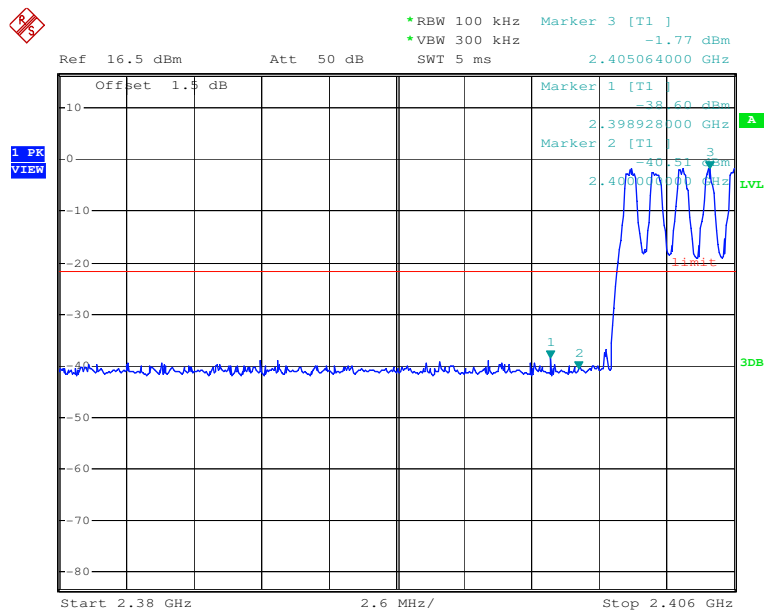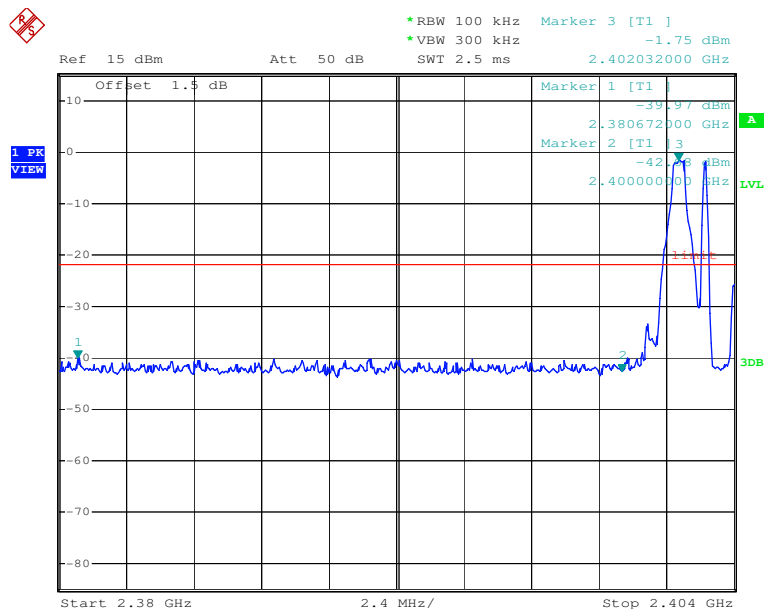





SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM131200649709

Page: 25 of 61

Test mode:	GFSK	Test channel:	Highest
------------	------	---------------	---------

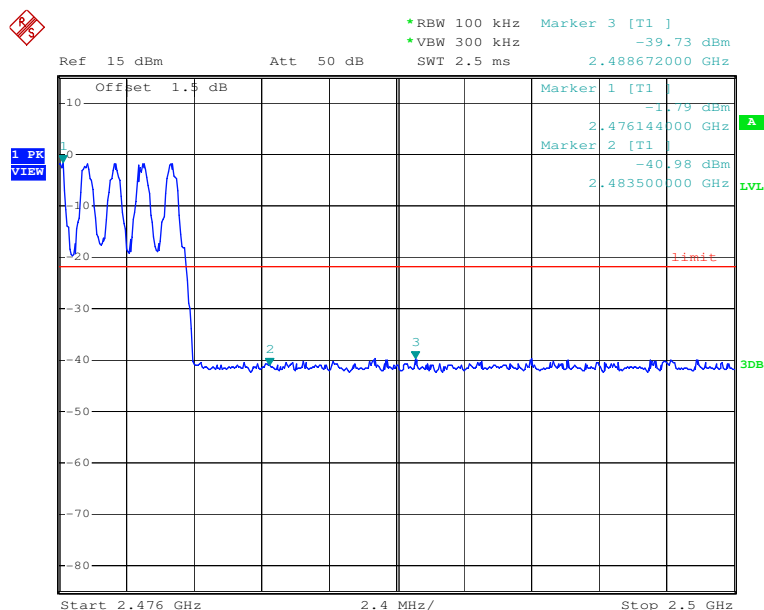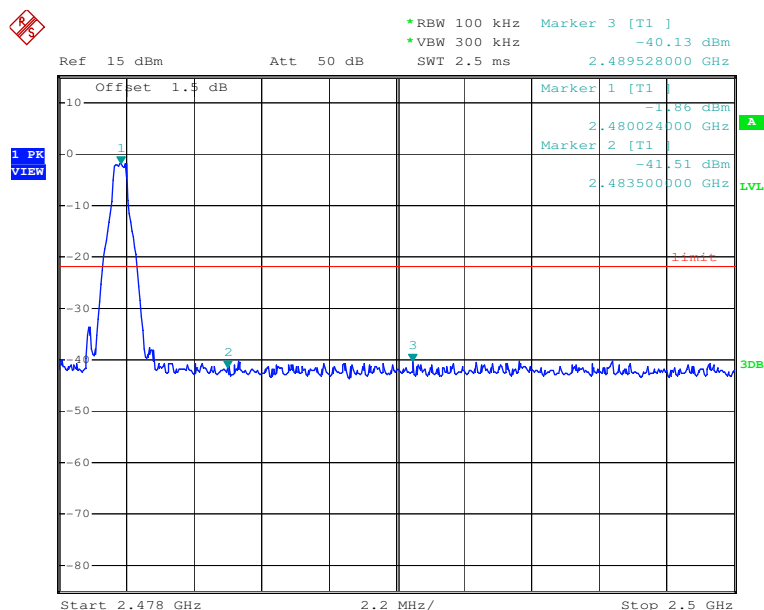





SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM131200649709

Page: 27 of 61

Test mode:	$\pi/4$ DQPSK	Test channel:	Highest
------------	---------------	---------------	---------

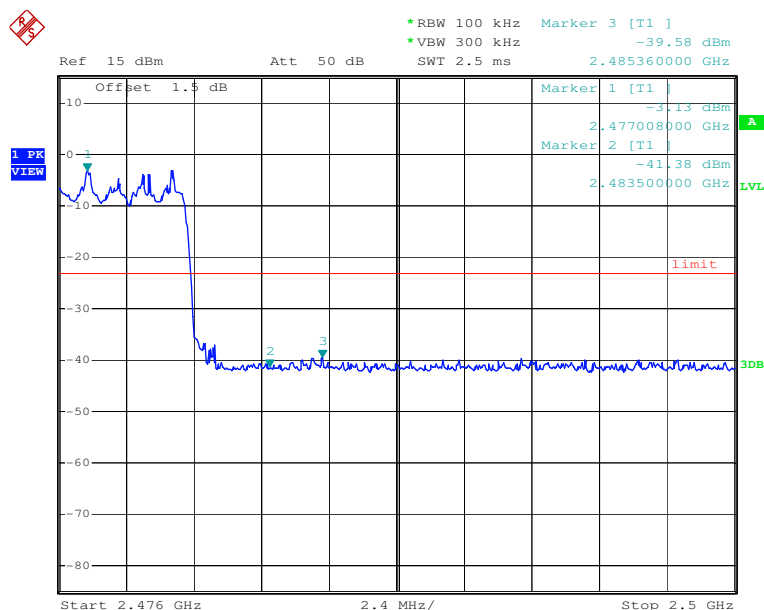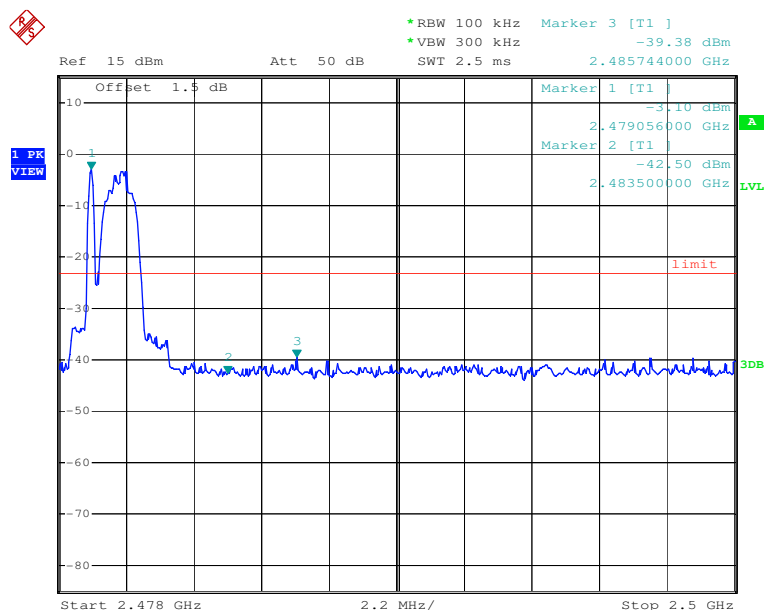





SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM131200649709

Page: 28 of 61

Test mode:	8DPSK	Test channel:	Lowest
------------	-------	---------------	--------

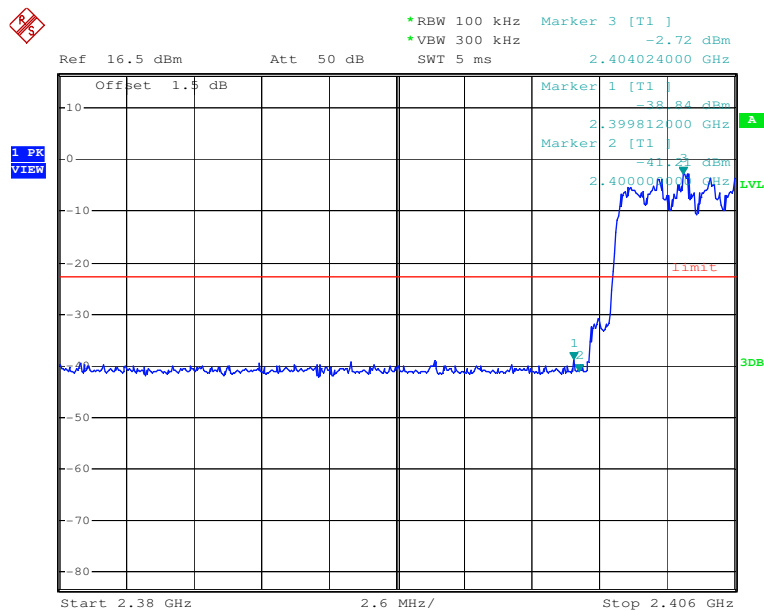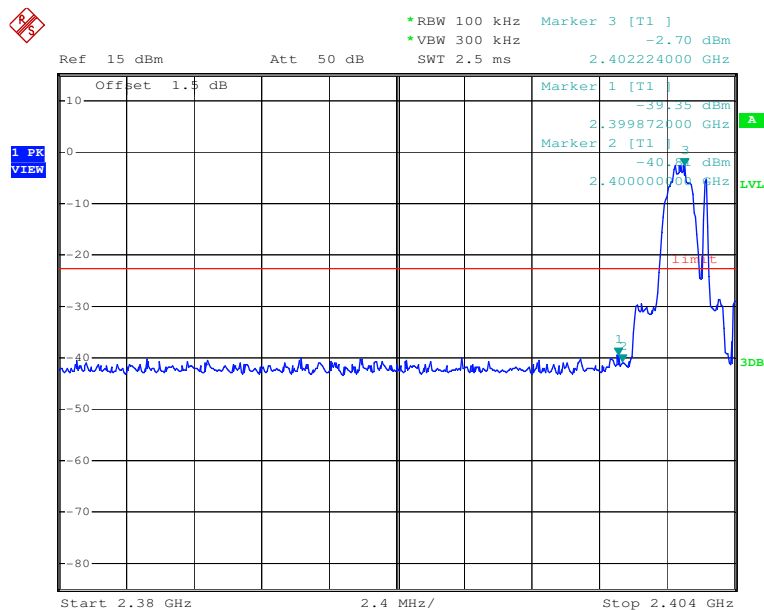





SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM131200649709


Page: 29 of 61

Test mode:	8DPSK	Test channel:	Highest
------------	-------	---------------	---------

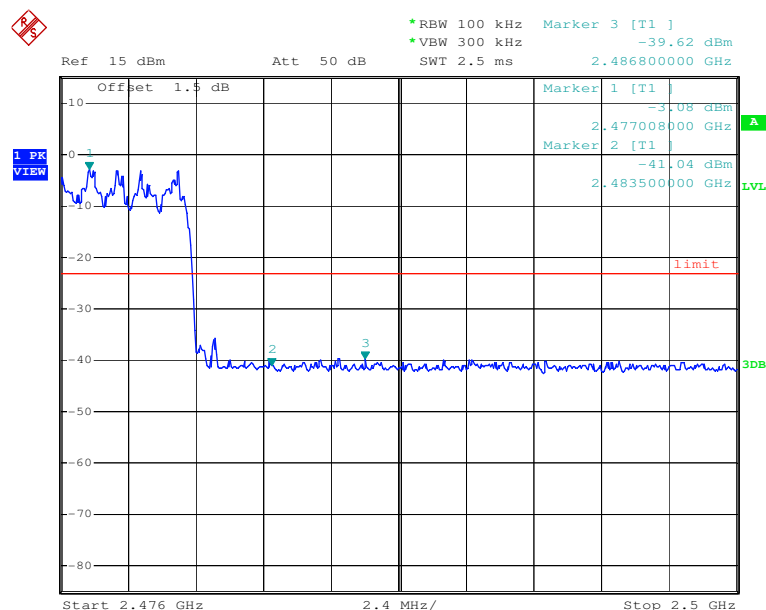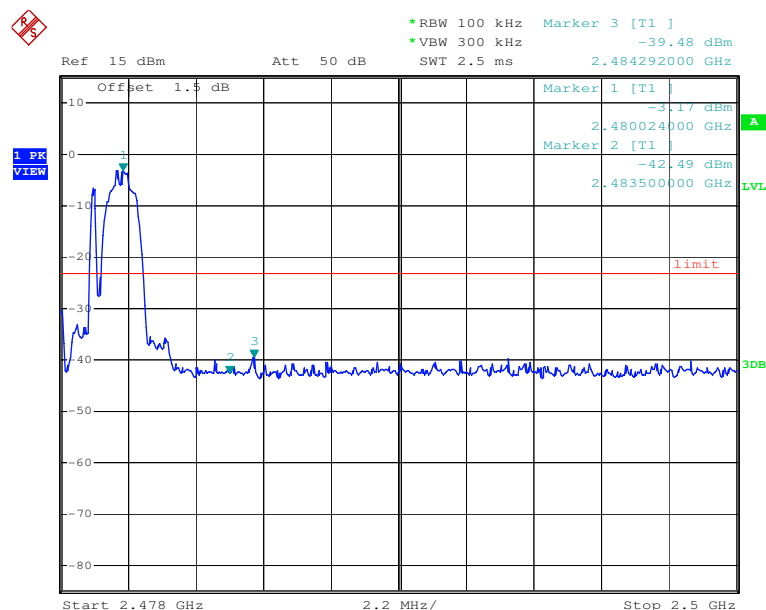



6.4 Spurious RF Conducted Emissions

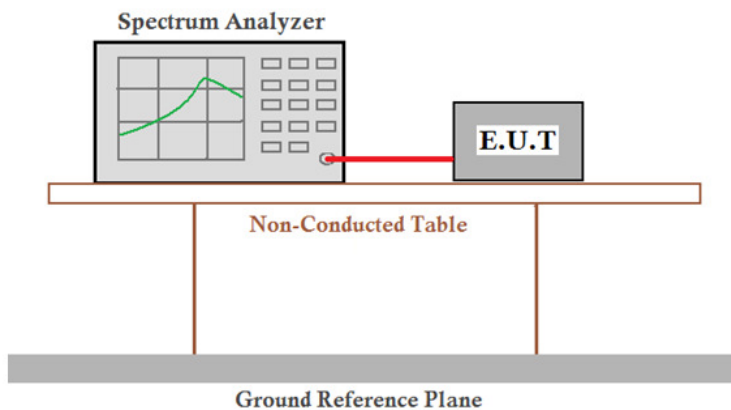Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 Section 7.8.8
Test Setup:	 <p>Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.</p>
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass





SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM131200649709

Page: 31 of 61

Test plot as follows:

Test mode:	GFSK	Test channel:	Lowest
------------	------	---------------	--------

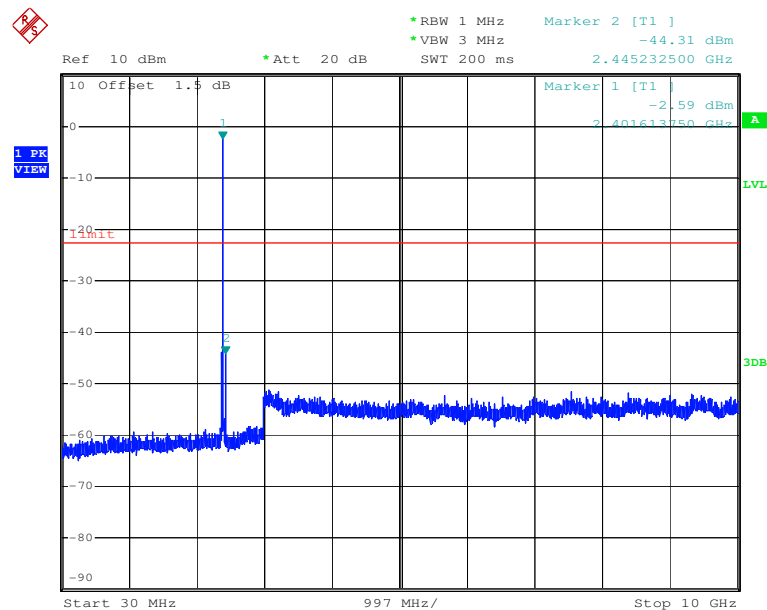
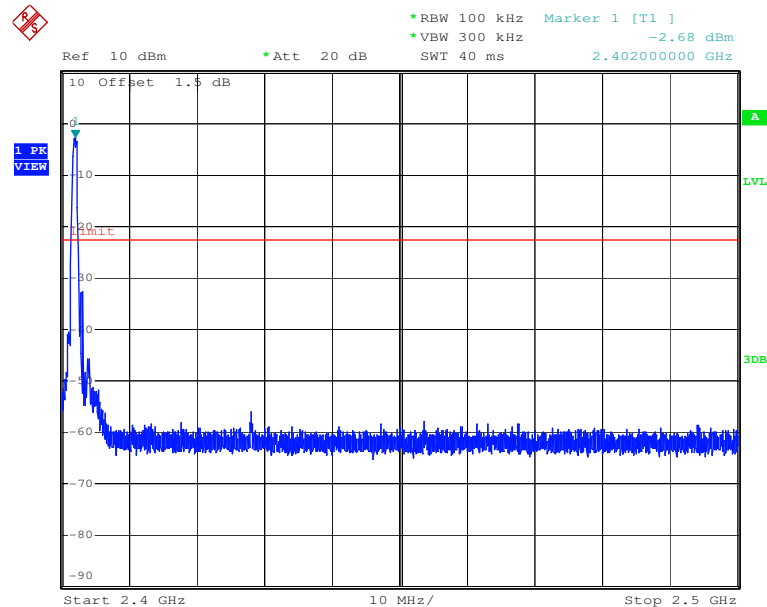




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM131200649709

Page: 33 of 61

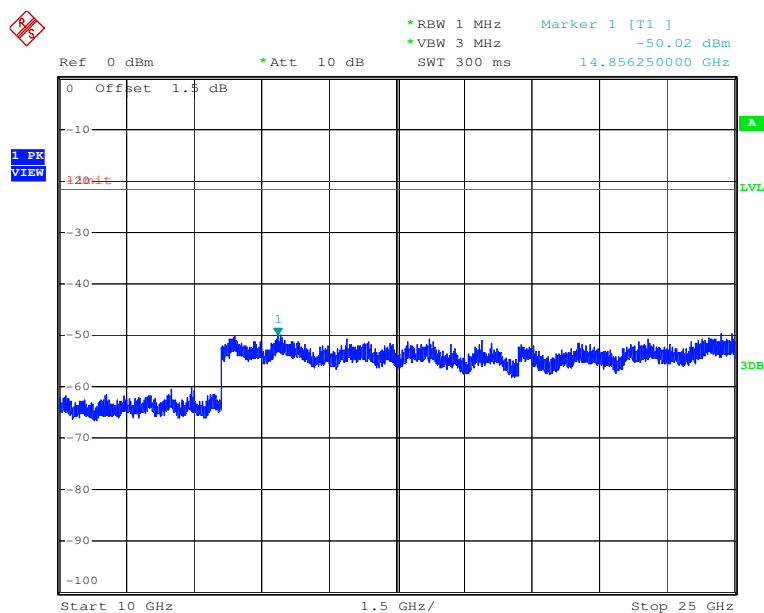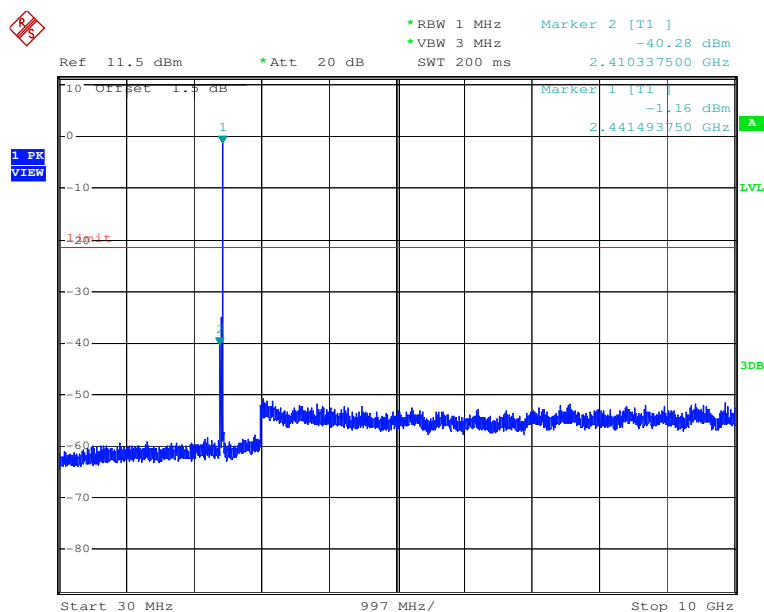





SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM131200649709

Page: 34 of 61

Test mode:	GFSK	Test channel:	Highest
------------	------	---------------	---------

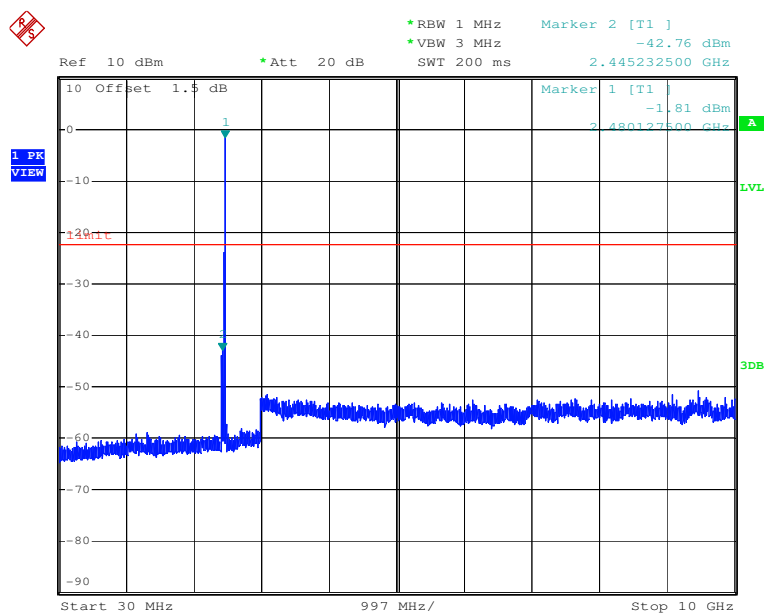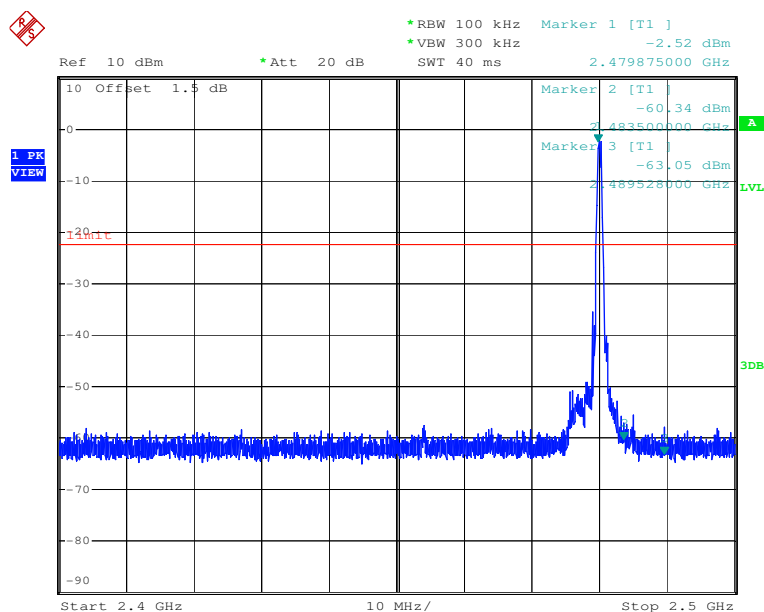





SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM131200649709

Page: 35 of 61

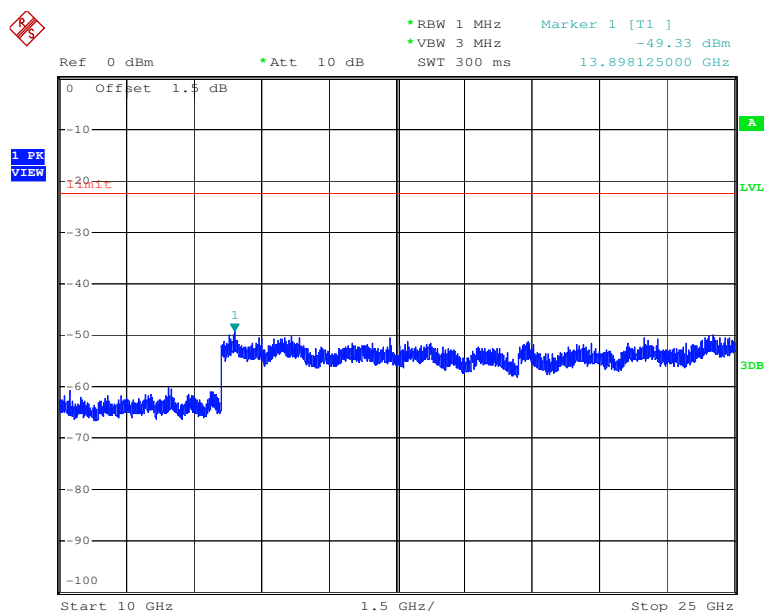

Test mode:	$\pi/4$ DQPSK	Test channel:	Lowest
------------	---------------	---------------	--------

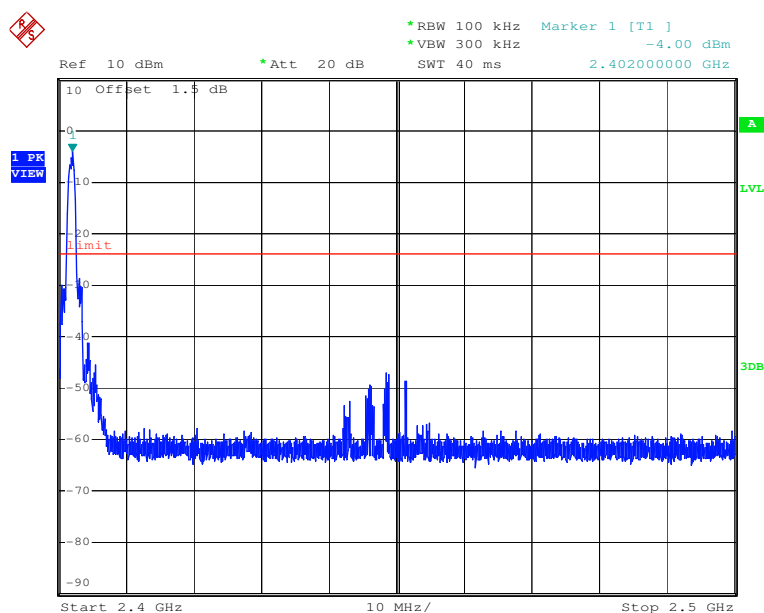

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch





SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM131200649709

Page: 37 of 61

Test mode:	$\pi/4$ DQPSK	Test channel:	Middle
------------	---------------	---------------	--------

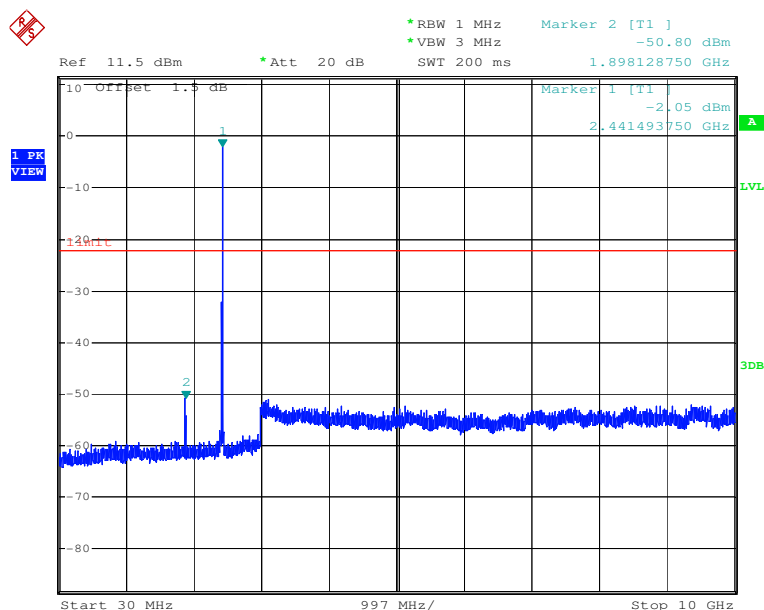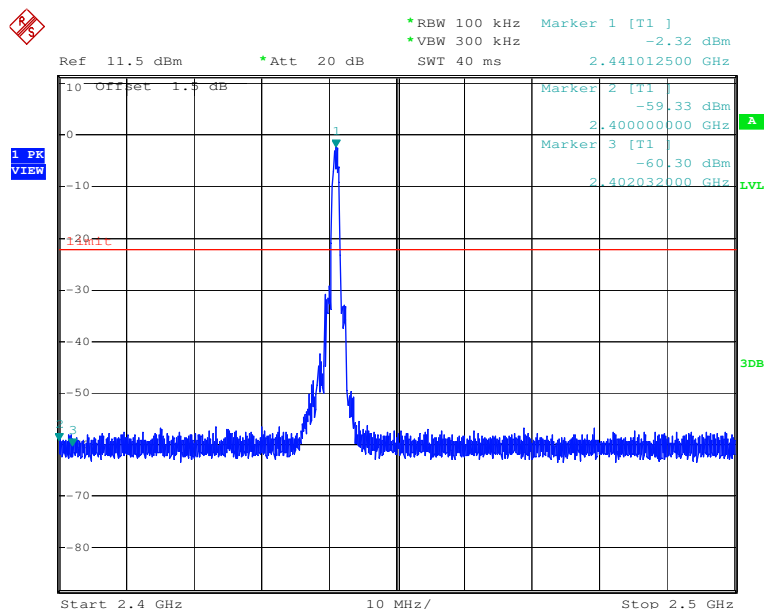





SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM131200649709

Page: 38 of 61

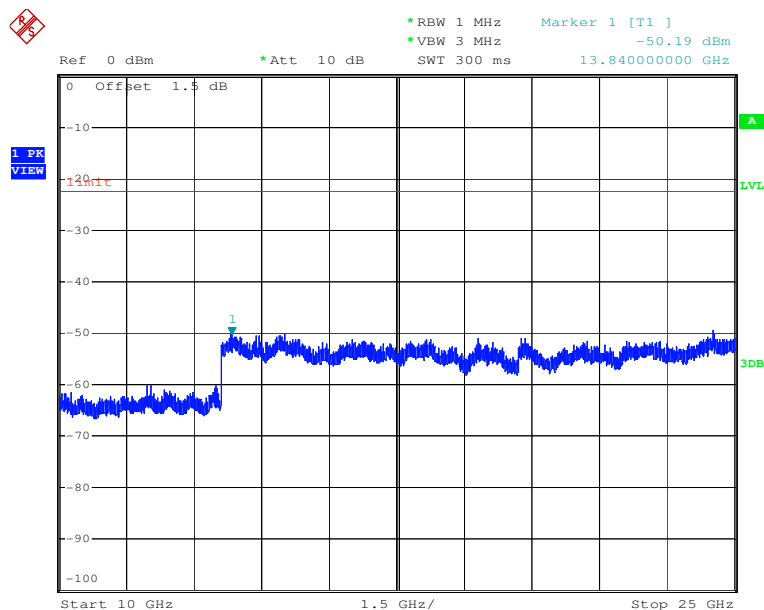

Test mode:	$\pi/4$ DQPSK	Test channel:	Highest
------------	---------------	---------------	---------


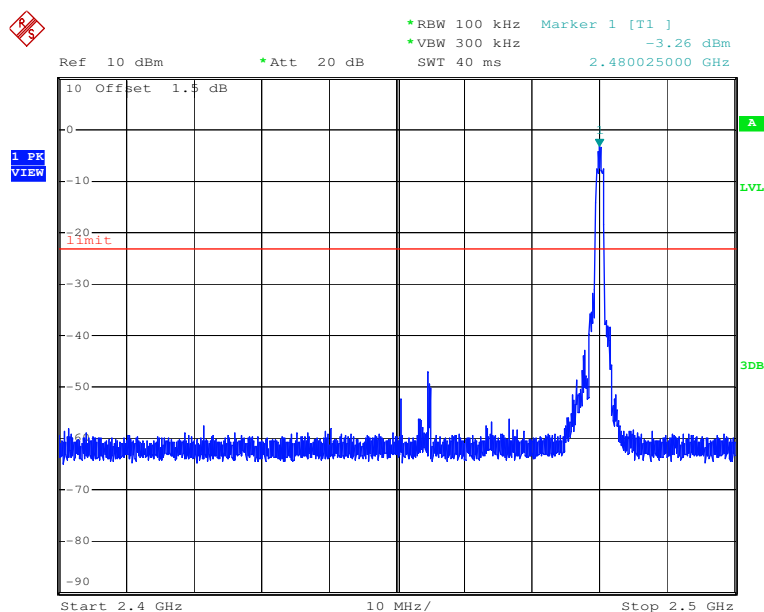




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM131200649709

Page: 39 of 61

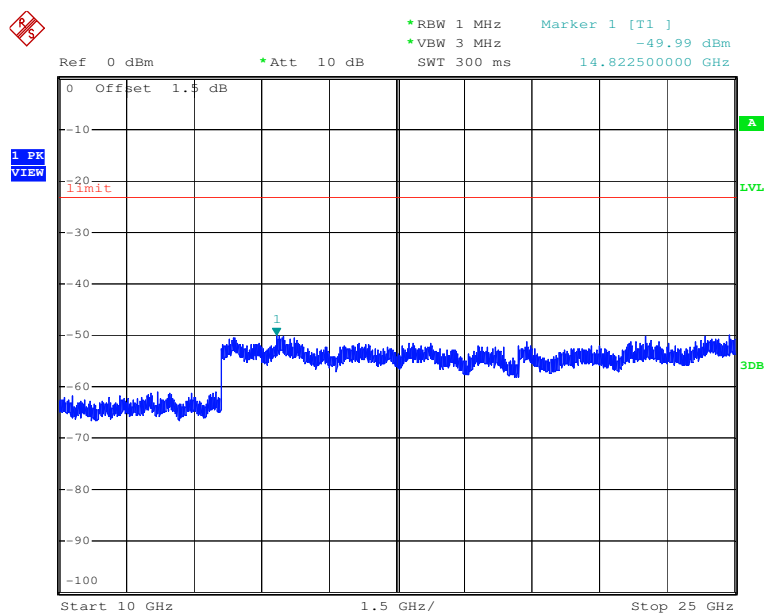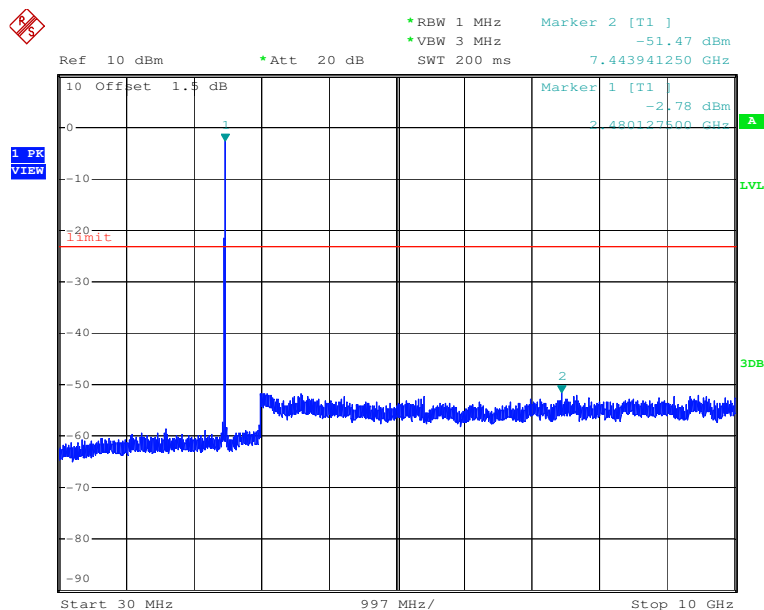





SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM131200649709

Page: 40 of 61

Test mode:	8DPSK	Test channel:	Lowest
------------	-------	---------------	--------

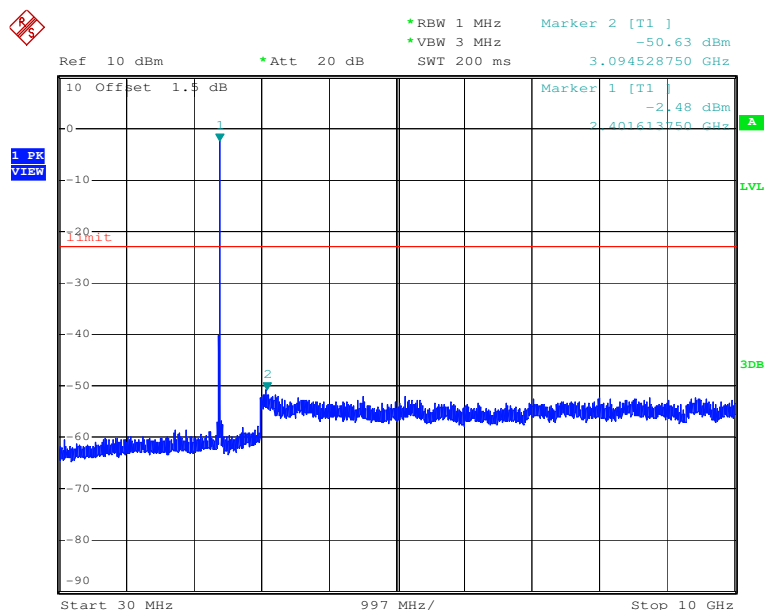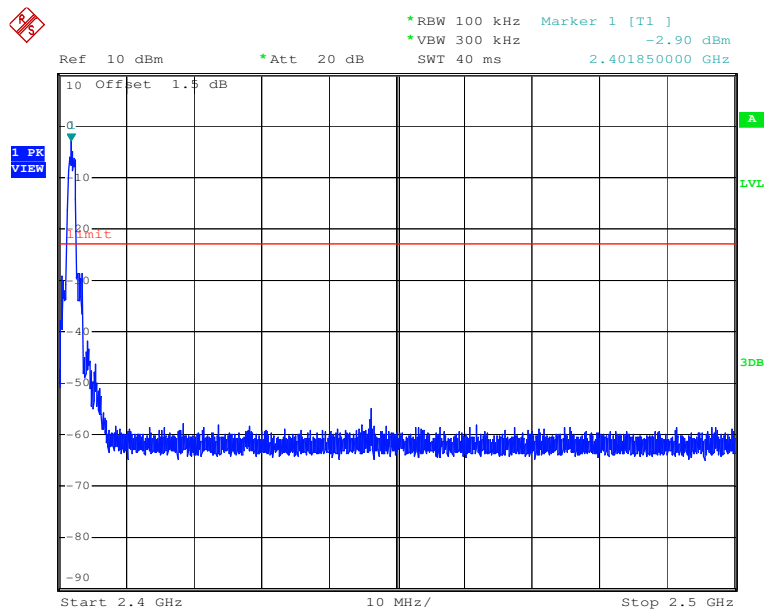





SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM131200649709

Page: 41 of 61

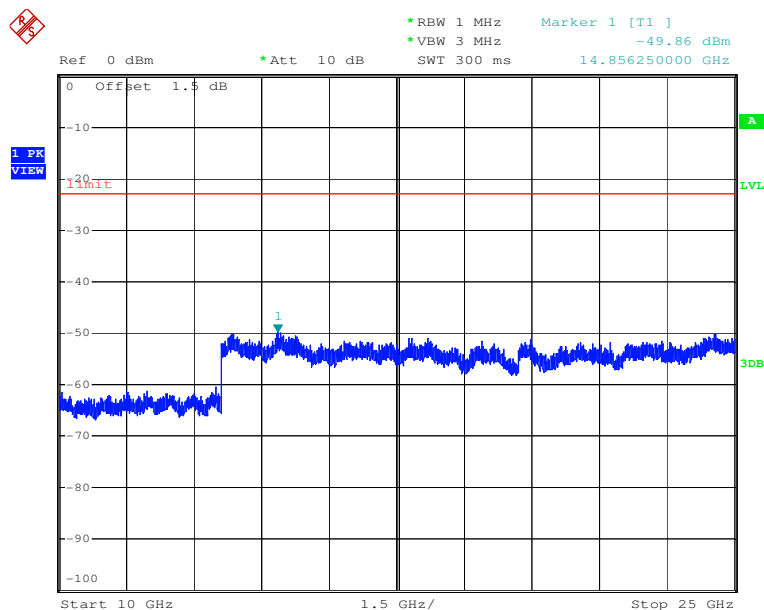

Test mode:	8DPSK	Test channel:	Middle
------------	-------	---------------	--------


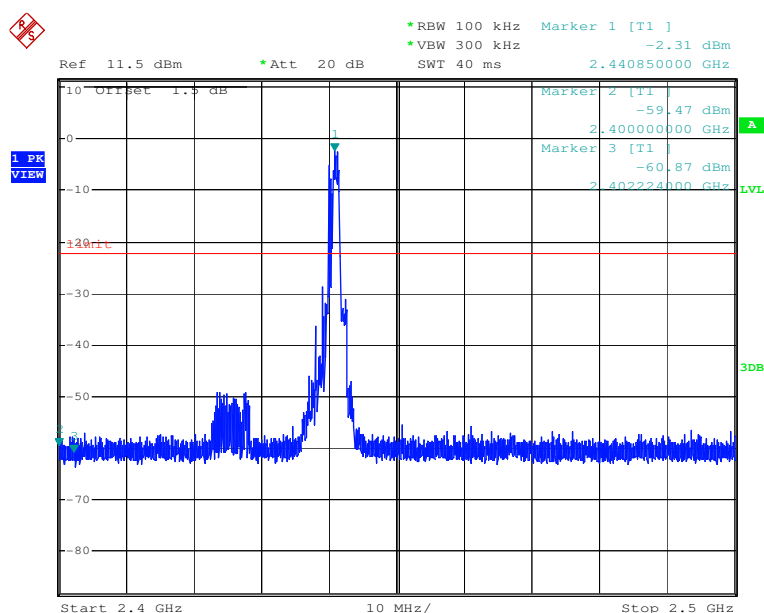




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM131200649709

Page: 42 of 61

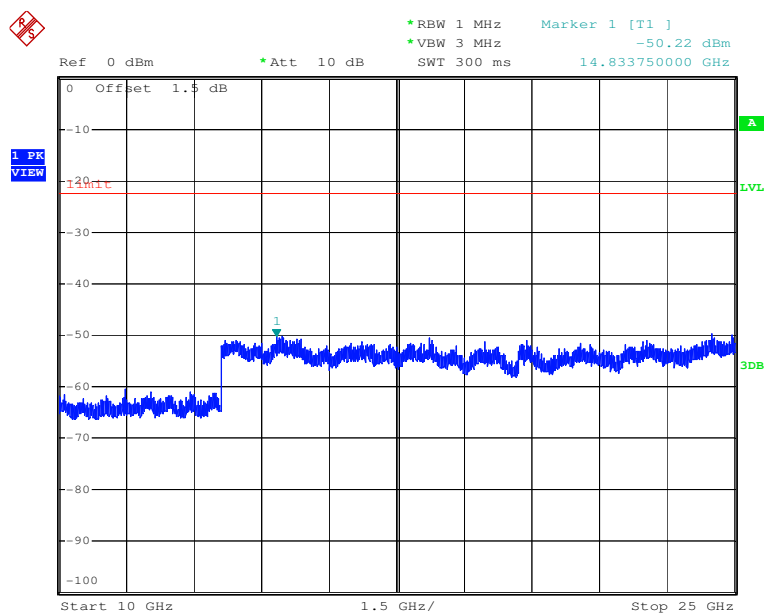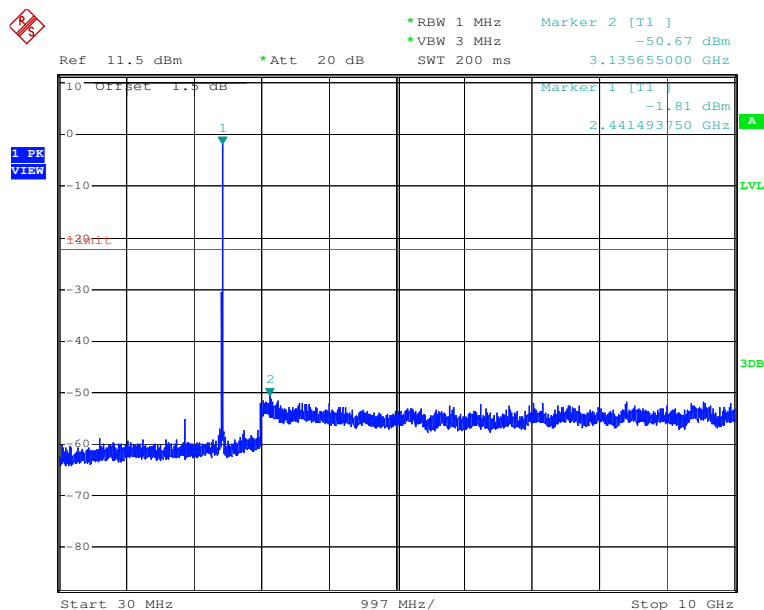





SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM131200649709

Page: 43 of 61

Test mode:	8DPSK	Test channel:	Highest
------------	-------	---------------	---------

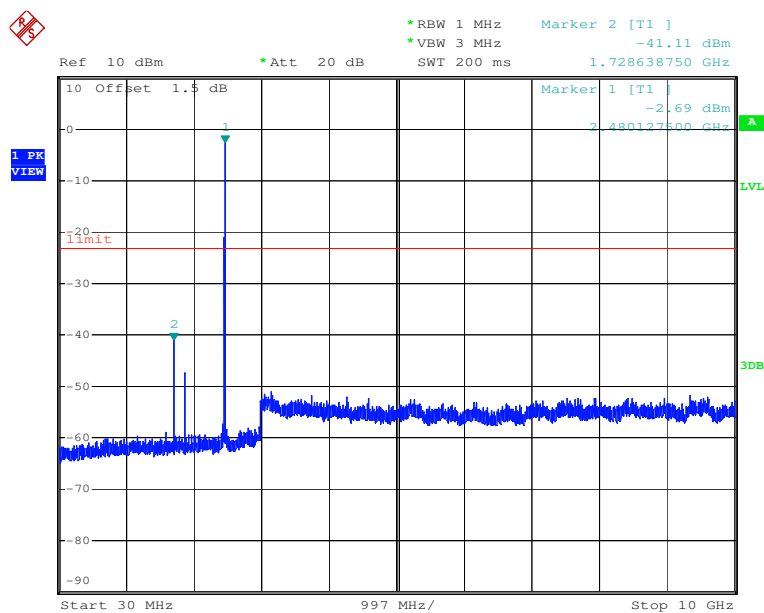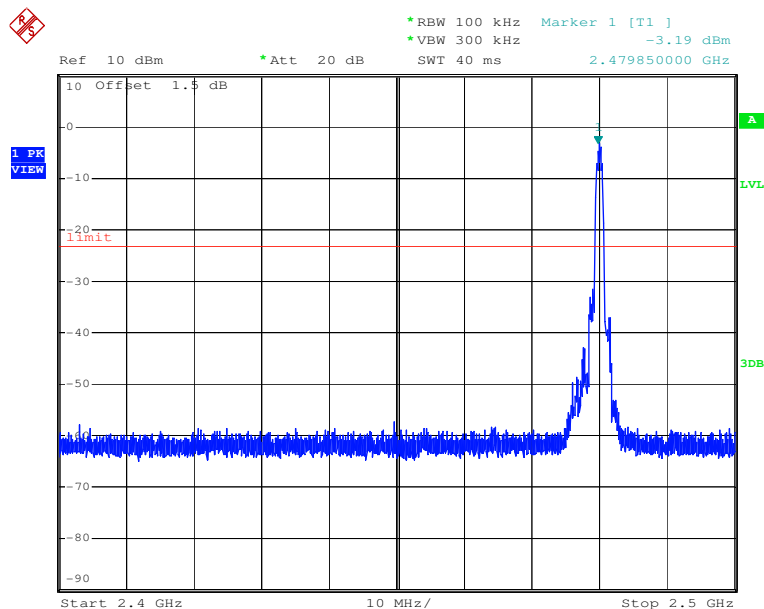




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM131200649709

Page: 44 of 61


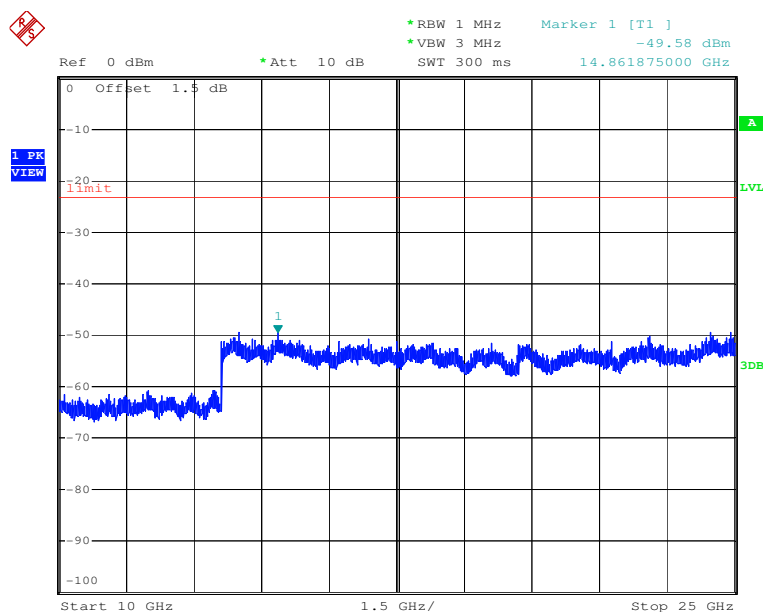


Remark:

Use 100kHz RBW to determine the relative limit in the band 2.4GHz to 2.5GHz, and Use 1MHz RBW to measure spurious emissions in the band 30MHz to 10GHz and 10GHz to 25GHz. The sweep points set to 30001.



6.5 Other requirements Frequency Hopping Spread Spectrum System

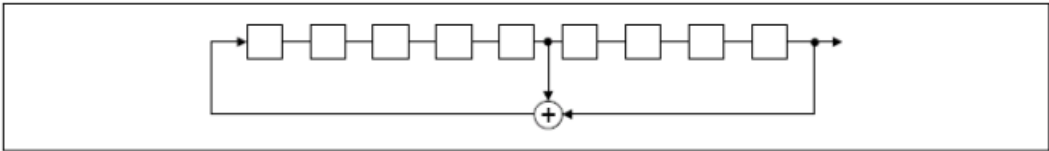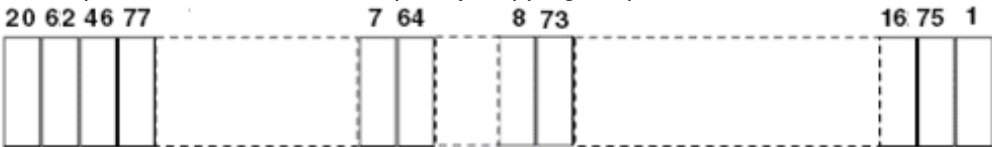Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1), (h) requirement:
<p>The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</p> <p>Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.</p> <p>The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.</p>	
<p>Compliance for section 15.247(a)(1)</p> <p>According to Bluetooth Core Specification, the pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.</p> <ul style="list-style-type: none">• Number of shift register stages: 9• Length of pseudo-random sequence: $2^9 - 1 = 511$ bits• Longest sequence of zeros: 8 (non-inverted signal)  <p><i>Linear Feedback Shift Register for Generation of the PRBS sequence</i></p> <p>An example of Pseudorandom Frequency Hopping Sequence as follow:</p>  <p>Each frequency used equally on the average by each transmitter.</p> <p>According to Bluetooth Core Specification, Bluetooth receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any Bluetooth transmitters and shift frequencies in synchronization with the transmitted signals.</p>	
<p>Compliance for section 15.247(g)</p>	



According to Bluetooth Core Specification, the Bluetooth system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

Compliance for section 15.247(h)

According to Bluetooth Core specification, the Bluetooth system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

According to the Bluetooth Core specification, the Bluetooth system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.



6.6 Radiated Spurious Emission

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Site:	Below 1GHz: Measurement Distance: 3m (Semi-Anechoic Chamber) Above 1GHz: Measurement Distance: 3m (Full-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.					

Test Setup:

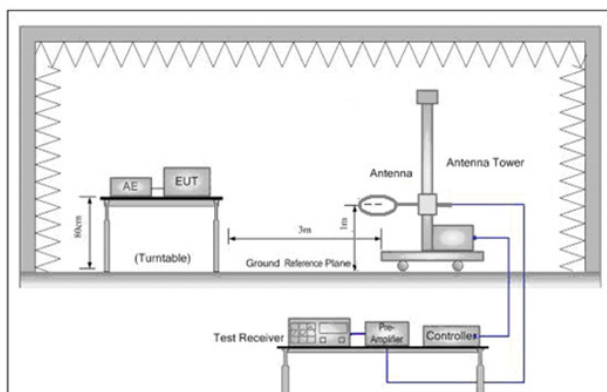


Figure 1. Below 30MHz

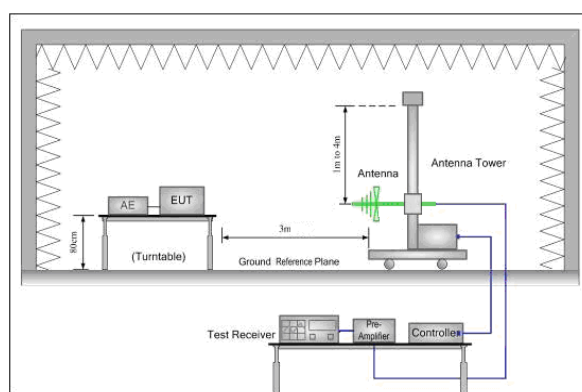


Figure 2. 30MHz to 1GHz

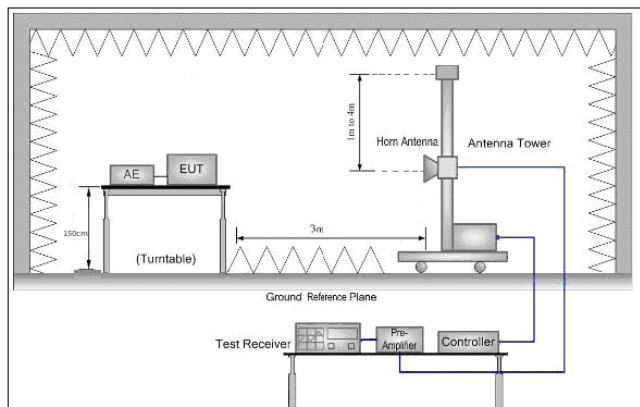


Figure 3. Above 1 GHz

Test Procedure:

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter full-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM131200649709

Page: 49 of 61


	<p>EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>h. Test the EUT in the lowest channel (2402MHz),the middle channel (2441MHz),the Highest channel (2480MHz)</p> <p>i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</p> <p>j. Repeat above procedures until all frequencies measured was complete.</p>
Exploratory Test Mode:	<p>Non-hopping transmitting mode with all kind of modulation and all kind of data type</p> <p>Transmitting mode, Charge + Transmitting mode.</p>
Final Test Mode:	<p>Through Pre-scan, find the DH1 of data type and GFSK modulation is the worst case.</p> <p>Pretest the EUT at Transmitting mode and Charge + Transmitting mode, found the Charge + Transmitting mode which it is worse case</p> <p>For below 1GHz part, through pre-scan, the worst case is the lowest channel.</p> <p>Only the worst case is recorded in the report.</p>
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass



6.6.1 Radiated Emission below 1GHz

30MHz~1GHz (QP)

Test mode: Charge + Transmitting mode Vertical

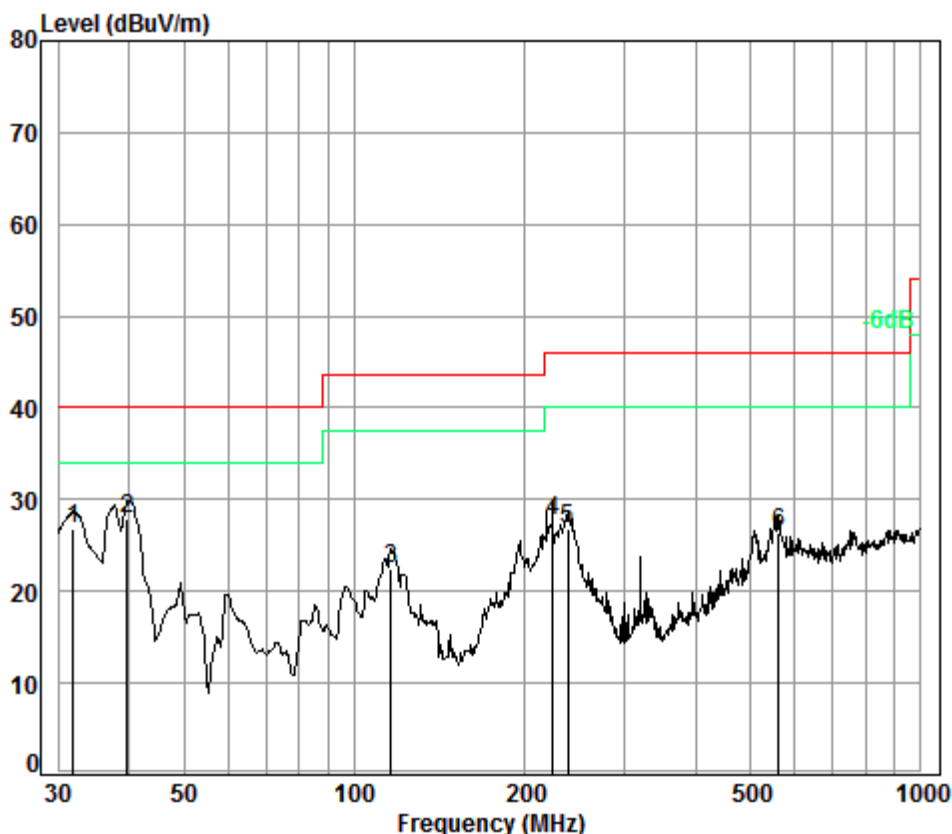

Condition: 3m VERTICAL

Job No. : 0036CR

Test mode: TX + charge

: 2# F

		Cable	Ant	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	31.95	0.60	17.61	27.35	35.91	26.77	40.00	-13.23
2	pp 39.71	0.60	13.26	27.32	41.33	27.87	40.00	-12.13
3	116.13	1.24	8.17	27.09	40.22	22.54	43.50	-20.96
4	223.73	1.54	11.43	26.62	41.42	27.77	46.00	-18.23
5	238.31	1.62	11.93	26.57	39.78	26.76	46.00	-19.24
6	560.69	2.66	18.99	27.60	32.29	26.34	46.00	-19.66




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM131200649709

Page: 51 of 61

Test mode:	Charge + Transmitting mode	Horizontal
------------	----------------------------	------------

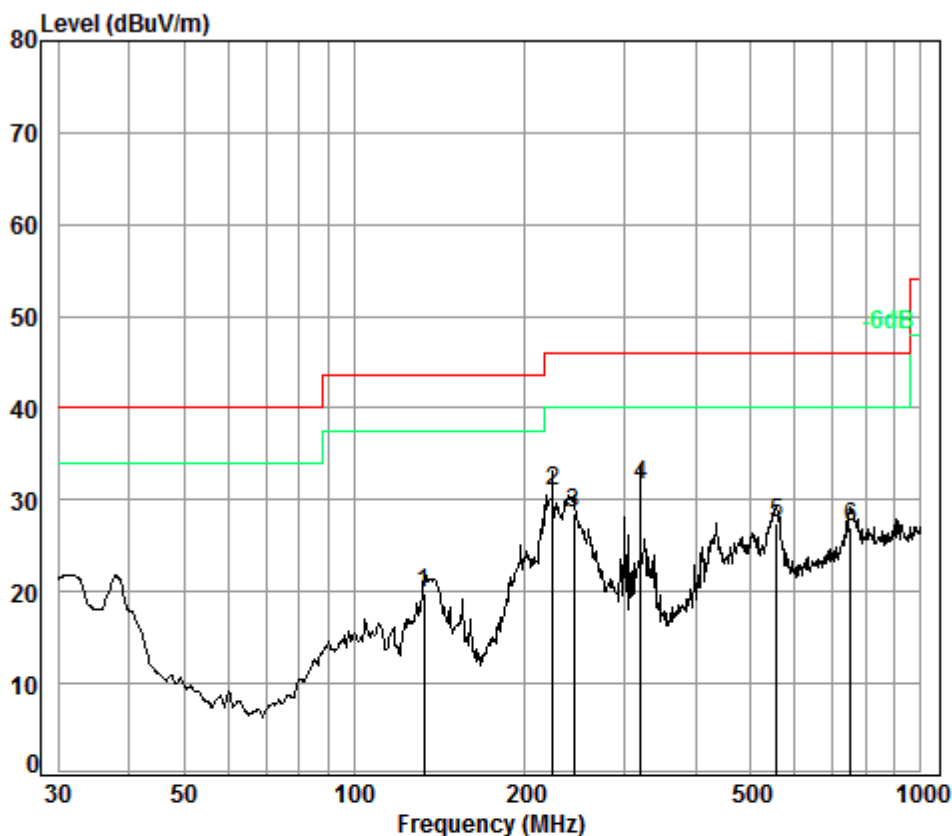

Condition: 3m HORIZONTAL

Job No. : 0036CR

Test mode: TX + charge

: 2# F

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	132.69	1.28	7.81	26.99	37.74	19.84	43.50	-23.66
2	223.73	1.54	11.43	26.62	44.67	31.02	46.00	-14.98
3	244.23	1.65	12.12	26.55	41.37	28.59	46.00	-17.41
4 pp	319.94	1.97	14.62	26.56	41.68	31.71	46.00	-14.29
5	556.77	2.66	18.95	27.61	33.40	27.40	46.00	-18.60
6	752.74	3.07	21.73	27.35	29.69	27.14	46.00	-18.86



6.6.2 Transmitter Emission above 1GHz

Test mode:		GFSK(DH1)		Test channel:		Lowest		Remark:	Peak
Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
3553.389	32.03	7.65	37.96	44.40	46.12	74	-27.88	Vertical	
4804.000	34.10	8.87	38.40	41.56	46.13	74	-27.87	Vertical	
5820.005	34.25	10.06	38.34	44.28	50.25	74	-23.75	Vertical	
7206.000	35.60	10.68	37.11	42.29	51.46	74	-22.54	Vertical	
9608.000	37.10	12.50	35.10	37.93	52.43	74	-21.57	Vertical	
12261.500	37.70	14.34	36.23	38.12	53.93	74	-20.07	Vertical	
3836.607	32.94	7.75	37.98	44.27	46.98	74	-27.02	Horizontal	
4804.000	34.10	8.87	38.40	42.12	46.69	74	-27.31	Horizontal	
6016.949	34.71	10.54	38.28	43.45	50.42	74	-23.58	Horizontal	
7206.000	35.60	10.68	37.11	42.42	51.59	74	-22.41	Horizontal	
9608.000	37.10	12.50	35.10	37.84	52.34	74	-21.66	Horizontal	
11963.580	37.58	14.52	35.59	37.41	53.92	74	-20.08	Horizontal	

Test mode:		GFSK(DH1)		Test channel:		Middle		Remark:	Peak
Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Cable Loss (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Over limit (dB)	Polarization	
3770.567	32.78	7.73	37.98	44.99	47.52	74	-26.48	Vertical	
4882.000	34.18	8.98	38.44	43.29	48.01	74	-25.99	Vertical	
5990.888	34.68	10.53	38.30	44.85	51.76	74	-22.24	Vertical	
7323.000	35.54	10.72	37.01	42.74	51.99	74	-22.01	Vertical	
9764.000	37.10	12.58	35.02	38.19	52.85	74	-21.15	Vertical	
12120.390	37.66	14.46	35.89	37.51	53.74	74	-20.26	Vertical	
3858.877	32.96	7.76	37.99	44.68	47.41	74	-26.59	Horizontal	
4882.000	34.18	8.98	38.44	42.70	47.42	74	-26.58	Horizontal	
6016.949	34.71	10.54	38.28	44.13	51.10	74	-22.9	Horizontal	
7323.000	35.54	10.72	37.01	41.22	50.47	74	-23.53	Horizontal	
9764.000	37.10	12.58	35.02	38.09	52.75	74	-21.25	Horizontal	
11998.250	37.60	14.56	35.60	37.00	53.56	74	-20.44	Horizontal	



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM131200649709

Page: 53 of 61

Test mode:		GFSK(DH1)		Test channel:		Highest	Remark:		Peak
Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamplifier factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Over limit (dB)	Polarization	
3920.787	33.02	7.78	37.99	44.78	47.59	74	-26.41	Vertical	
4960.000	34.26	9.09	38.48	43.38	48.25	74	-25.75	Vertical	
6078.201	34.74	10.46	38.22	44.71	51.69	74	-22.31	Vertical	
7440.000	35.60	10.77	36.90	42.61	52.08	74	-21.92	Vertical	
9920.000	37.22	12.67	34.94	37.15	52.10	74	-21.9	Vertical	
12137.940	37.67	14.45	35.93	37.48	53.67	74	-20.33	Vertical	
3949.255	33.05	7.79	37.99	44.98	47.83	74	-26.17	Horizontal	
4960.000	34.26	9.09	38.48	42.71	47.58	74	-26.42	Horizontal	
6060.637	34.73	10.48	38.24	44.92	51.89	74	-22.11	Horizontal	
7440.000	35.60	10.77	36.90	42.04	51.51	74	-22.49	Horizontal	
9920.000	37.22	12.67	34.94	37.33	52.28	74	-21.72	Horizontal	
12226.070	37.70	14.37	36.14	37.32	53.25	74	-20.75	Horizontal	

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

6.7 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205		
Test Method:	ANSI C63.10: 2013		
Test Site:	Below 1GHz: Measurement Distance: 3m (Semi-Anechoic Chamber) Above 1GHz: Measurement Distance: 3m (Full-Anechoic Chamber)		
Limit:	Frequency	Limit (dBuV/m @3m)	Remark
	30MHz-88MHz	40.0	Quasi-peak Value
	88MHz-216MHz	43.5	Quasi-peak Value
	216MHz-960MHz	46.0	Quasi-peak Value
	960MHz-1GHz	54.0	Quasi-peak Value
	Above 1GHz	54.0	Average Value
		74.0	Peak Value
Test Setup:			

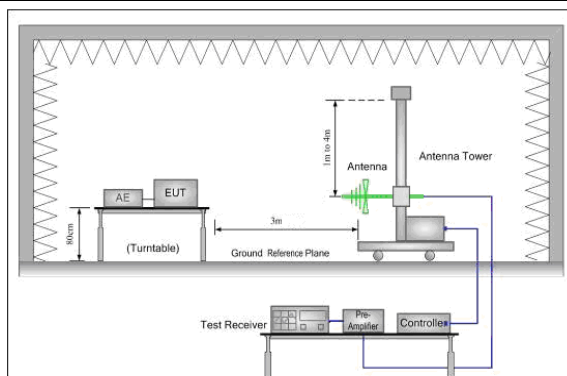


Figure 1. 30MHz to 1GHz

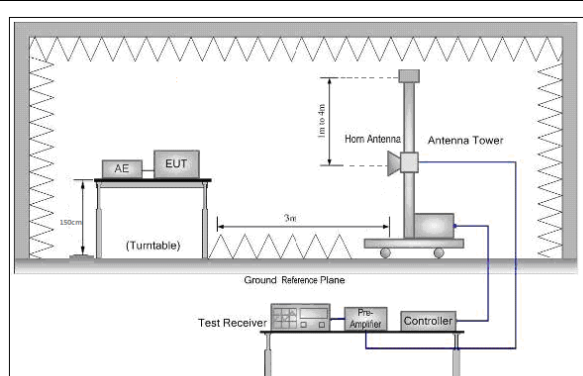


Figure 2. Above 1 GHz



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM131200649709

Page: 55 of 61

Test Procedure:	<ul style="list-style-type: none">a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter full-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.c. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.g. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channelh. Test the EUT in the lowest channel , the Highest channeli. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.j. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type Transmitting mode, Charge + Transmitting mode.
Final Test Mode:	Through Pre-scan, find the DH5 of data type and GFSK modulation is the worst case. Pretest the EUT at Transmitting mode and Charge + Transmitting mode, found the Charge + Transmitting mode which it is worse case Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM131200649709

Page: 56 of 61

Test plot as follows:

Worse case mode:	GFSK (DH5)	Test channel:	Lowest	Remark:	Peak	Vertical
------------------	------------	---------------	--------	---------	------	----------

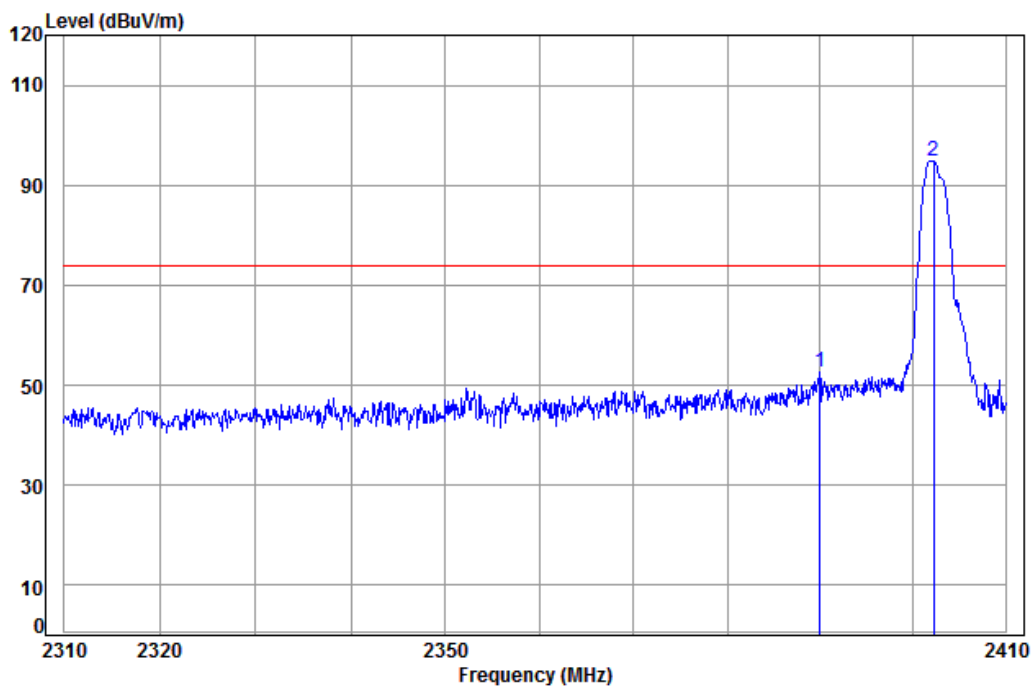

Condition: 3m Vertical

Job No: : 10036CR

Mode: : 2402 Band edge

: BT

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	5.34	28.57	37.96	56.84	52.79	74.00	-21.21	
2 pp	2402.250	5.35	28.61	37.96	98.95	94.95	74.00	20.95	




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM131200649709

Page: 57 of 61

Worse case mode:	GFSK (DH5)	Test channel:	Lowest	Remark:	Peak	Horizontal
------------------	------------	---------------	--------	---------	------	------------

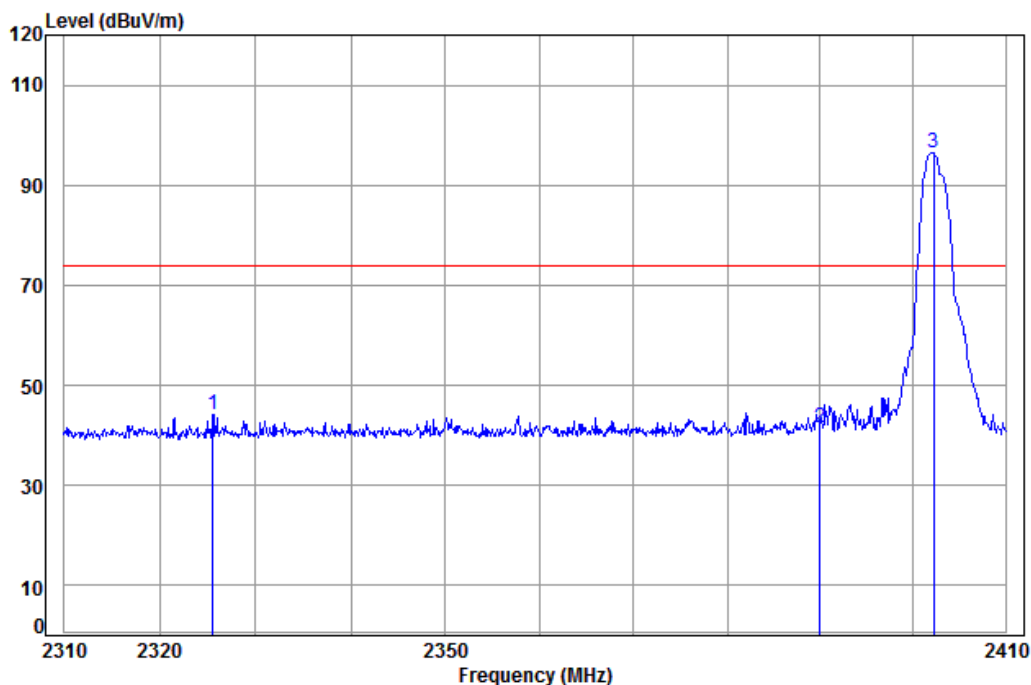

Condition: 3m HORIZONTAL

Job No: : 10036CR

Mode: : 2402 Band edge

: BT

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2325.520	5.29	28.38	37.97	48.54	44.24	74.00	-29.76	
2	2390.000	5.34	28.57	37.96	45.53	41.48	74.00	-32.52	
3 pp	2402.250	5.35	28.61	37.96	100.36	96.36	74.00	22.36	




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM131200649709

Page: 58 of 61

Worse case mode:	GFSK (DH5)	Test channel:	Highest	Remark:	Peak	Vertical
------------------	------------	---------------	---------	---------	------	----------

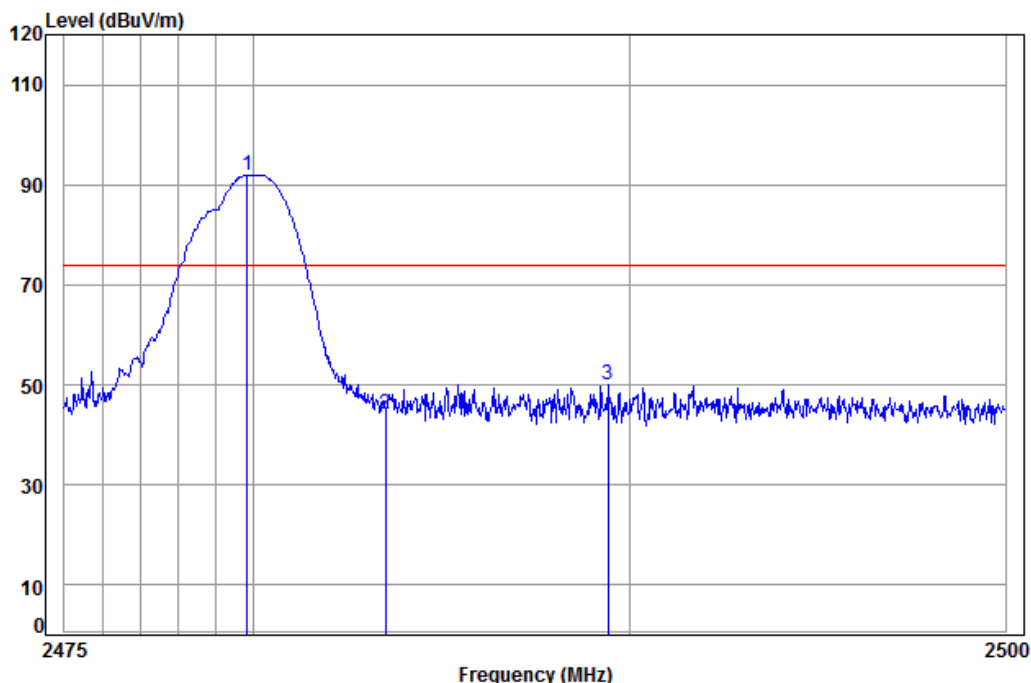

Condition: 3m Vertical

Job No: : 10036CR

Mode: : 2480 Band edge

: BT

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2479.830	5.41	28.97	37.95	95.49	91.92	74.00	17.92	
2	2483.500	5.41	28.98	37.95	47.83	44.27	74.00	-29.73	
3	2489.419	5.41	29.01	37.95	53.60	50.07	74.00	-23.93	




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM131200649709

Page: 59 of 61

Worse case mode:	GFSK(DH5)	Test channel:	Highest	Remark:	Peak	Horizontal
------------------	-----------	---------------	---------	---------	------	------------

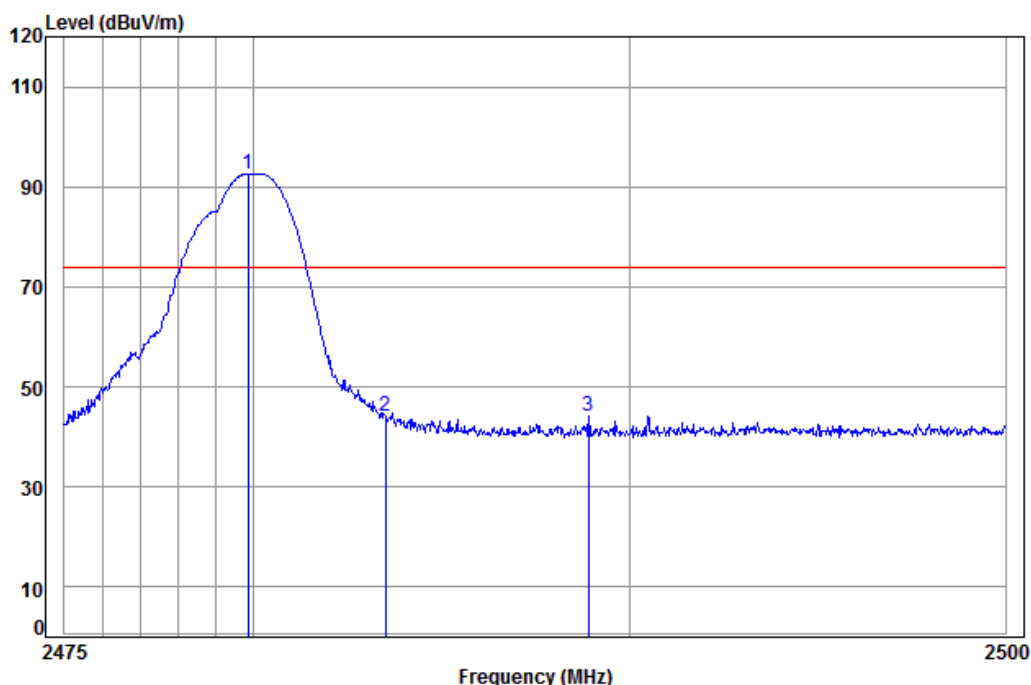

Condition: 3m HORIZONTAL

Job No: : 10036CR

Mode: : 2480 Band edge

: BT

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2479.855	5.41	28.97	37.95	96.22	92.65	74.00	18.65	
2	2483.500	5.41	28.98	37.95	47.86	44.30	74.00	-29.70	
3	2488.894	5.41	29.01	37.95	47.65	44.12	74.00	-29.88	

Note:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

$$\text{Final Test Level} = \text{Receiver Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Preamplifier Factor}$$


7 Photographs - EUT Test Setup

Test Model No.: MF8172

7.1 Radiated Emission

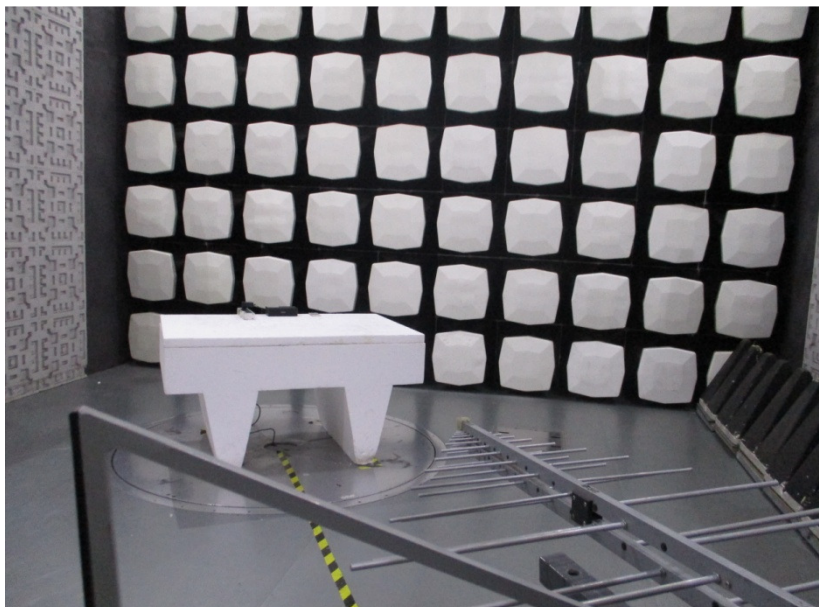

7.2 Radiated Spurious Emission

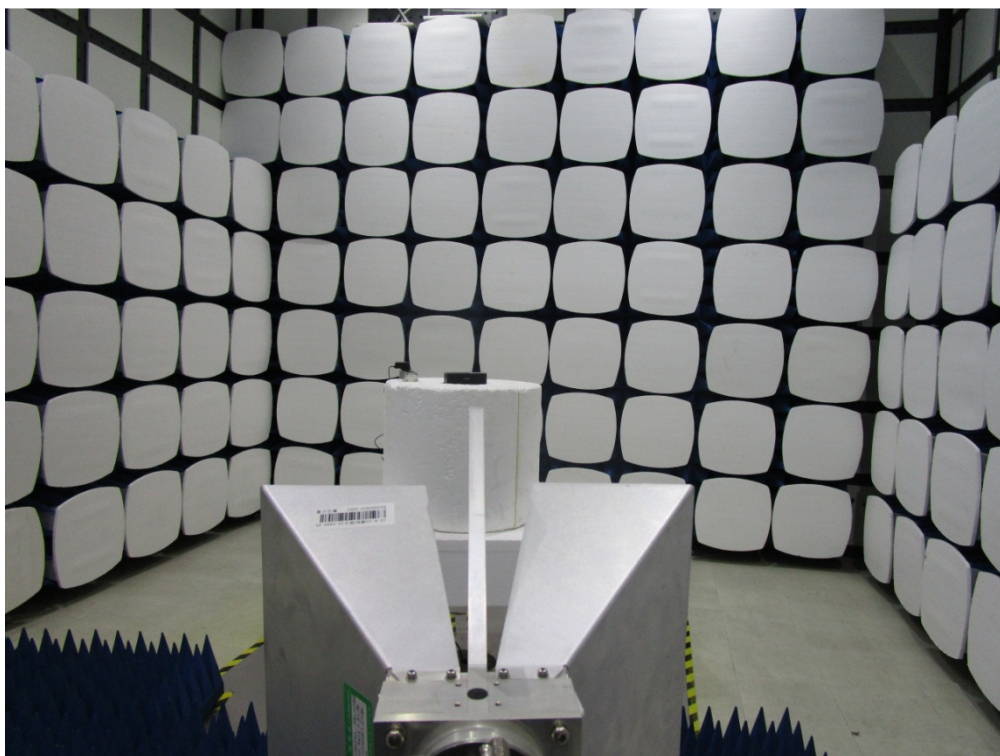

8 Photographs - EUT Constructional Details

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1611010036CR.