



FCC RF TEST REPORT

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2215-1
FCC ID : IHDT56AA5
STANDARD : FCC 47 CFR Part 2, 30
CLASSIFICATION : 5GM-Part 30 Mobile Transmitter
TEST DATE(S) : Jan. 06, 2022 ~ Jan. 18, 2022

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures ANSI C63.26-2015 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Reviewed by: Derreck Chen / Supervisor

Approved by: Eric Shih / Manager



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan Shenzhen, 518055
People's Republic of China



Table of Contents

History of this test report..... 3

Summary of Test Result..... 4

1 General Description 5

 1.1 Applicant..... 5

 1.2 Manufacturer 5

 1.3 Feature of Equipment Under Test..... 5

 1.4 Product Specification of Equipment Under Test 5

 1.5 Modification of EUT 6

 1.6 Testing Location 6

 1.7 Specification of Accessory 6

 1.8 Maximum EIRP Power, Frequency Tolerance and Emission Designator..... 7

 1.9 Applied Standards 7

2 Test Configuration of Equipment Under Test 8

 2.1 Test Mode..... 8

 2.2 Connection Diagram of Test System 9

 2.3 Measurement Results Explanation Example 9

 2.4 Far Field Condition for Frequency above 18GHz 10

 2.5 Frequency List of Low/Middle/High Channels..... 10

3 Radiated Test Items 11

 3.1 Measuring Instruments..... 11

 3.2 Test Setup 11

 3.3 Test Result of Radiated Test..... 12

 3.4 EIRP Measurement..... 13

 3.5 Occupied Bandwidth 14

 3.6 Radiated Spurious Emission Measurement..... 15

 3.7 Frequency Stability Measurement..... 16

4 List of Measuring Equipment..... 17

5 Uncertainty of Evaluation..... 18

Appendix A. Test Results of EIRP and Radiated Test

Appendix B. Test Setup Photos

Appendix C. R&S Mixer Certificate

Appendix D. Calibration certificate of Standard Gain Horn Antennas



History of this test report

| Report No. | Version | Description | Issued Date |
|--------------|---------|-------------------------|---------------|
| FG1N0903-01B | Rev. 01 | Initial issue of report | Feb. 21, 2022 |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |



Summary of Test Result

| Report Clause | Ref Std. Clause | Test Items | Limit | Result (PASS/FAIL) | Remark |
|---------------|--------------------|---|-------------------------|--------------------|--------|
| 3.4 | §2.1046 §30.202 | EIRP Measurement | +43dBm | Pass | - |
| 3.5 | §2.1049 | Occupied Bandwidth | Not Applicable | Reporting only | - |
| 3.6 | §2.1053 §30.203 | Radiated Spurious Emission | -5dBm/MHz -13dBm/MHz | Pass | - |
| 3.7 | §2.1055 | Frequency Stability for Temperature & Voltage | Within the band | Pass | - |

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Feature of Equipment Under Test

| Product Feature | |
|-----------------|---------------------------|
| Equipment | Mobile Cellular Phone |
| Brand Name | Motorola |
| Model Name | XT2215-1 |
| FCC ID | IHDT56AA5 |
| IMEI Code | Radiated: 351626420009596 |
| HW Version | DVT2 |
| SW Version | S1SD32.29 |
| EUT Stage | Identical Prototype |

Remark: The above EUT's information was declared by manufacturer.

1.4 Product Specification of Equipment Under Test

| Product Specification subjective to this standard | |
|---|--|
| Device Category in Part 30 | Mobile station |
| Tx Frequency | NR band n260: 37GHz ~ 40GHz NR band n261: 27.5GHz ~ 28.35GHz |
| Rx Frequency | NR band n260: 37GHz ~ 40GHz NR band n261: 27.5GHz ~ 28.35GHz |
| Support Bandwidth | NR band n260: 50 MHz and 100 MHz NR band n261: 50 MHz and 100 MHz |
| Maximum Number of contiguous CC | 2 |
| Maximum Aggregated Bandwidth | 200MHz |
| Maximum EIRP | NR band n260: Module 0: 29.82 dBm Module 1: 29.36 dBm NR band n261: Module 0: 29.47 dBm Module 1: 29.97 dBm |
| Type of Modulation | CP-OFDM: QPSK / 16QAM / 64QAM DFT-s-OFDM: Pi/2-BPSK / QPSK / 16QAM / 64QAM |

Remark: The highest EIRP was measured on dual beam case for n260/n261.



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

| | | | |
|---------------------------|---|----------------------------|---------------------------------------|
| Test Firm | Sporton International Inc. (Shenzhen) | | |
| Test Site Location | 1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595 | | |
| Test Site No. | Sporton Site No. | FCC Designation No. | FCC Test Firm Registration No. |
| | 03CH02-SZ | CN1256 | 421272 |
| Engineer | Jung Guo | | |
| Temperature | 22~25°C | | |
| Humidity | 48~52% | | |

1.7 Specification of Accessory

| Specification of Accessory | | | | |
|----------------------------|-------------------|---------------------|-------------------|------------|
| AC Adapter 1 | Brand Name | Motorola(Chenyang) | Model Name | MC-101 |
| AC Adapter 2 | Brand Name | Motorola(Salcomp) | Model Name | MC-101 |
| AC Adapter 3 | Brand Name | Motorola(AOHAI) | Model Name | MC-101 |
| Battery | Brand Name | Motorola(ATL) | Model Name | MD50 |
| USB Cable 1 | Brand Name | Motorola(Saibao) | Model Name | SC18D22297 |
| USB Cable 2 | Brand Name | Motorola(Cabletech) | Model Name | SC18D22298 |
| USB Cable 3 | Brand Name | Motorola(Luxshare) | Model Name | SC18D22299 |

1.8 Maximum EIRP Power, Frequency Tolerance and Emission Designator

| 5G NR n260 | | PI/2 BPSK / QPSK | | | 16QAM / 64QAM | | |
|------------|-----------------------|------------------------------|---------------------------|-----------------|------------------------------|---------------------------|-----------------|
| BW (MHz) | Frequency Range (MHz) | Emission Designator (99%OBW) | Frequency Tolerance (ppm) | Maximum EIRP(W) | Emission Designator (99%OBW) | Frequency Tolerance (ppm) | Maximum EIRP(W) |
| 50 | 37025 ~ 39975 | 46M6G7D | - | 0.9397 | 46M3W7D | - | 0.5598 |
| 100 | 37050 ~ 39950 | 94M6G7D | 8.660 | 0.9594 | 94M4W7D | - | 0.6039 |
| 200 | 37050 ~ 39950 | 192MG7D | - | 0.3342 | 194MW7D | - | 0.2844 |

| 5G NR n261 | | PI/2 BPSK / QPSK | | | 16QAM / 64QAM | | |
|------------|-----------------------|------------------------------|---------------------------|-----------------|------------------------------|---------------------------|-----------------|
| BW (MHz) | Frequency Range (MHz) | Emission Designator (99%OBW) | Frequency Tolerance (ppm) | Maximum EIRP(W) | Emission Designator (99%OBW) | Frequency Tolerance (ppm) | Maximum EIRP(W) |
| 50 | 27525 ~ 28325 | 46M4G7D | - | 0.9795 | 46M3W7D | - | 0.5649 |
| 100 | 27550 ~ 28300 | 94M5G7D | 7.126 | 0.9931 | 94M3W7D | - | 0.5808 |
| 200 | 27550 ~ 28300 | 192MG7D | - | 0.3690 | 192MW7D | - | 0.3214 |

1.9 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC 47 CFR Part 2, 30
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 842590 D01 Upper Microwave Flexible Use Service v01r02

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

EUT has total 2 millimeter wave antenna modules and up to 2 beams operation for each module.

Any antenna module cannot transmit simultaneously with the other antenna modules.

Preliminary EIRP test was performed for all beam configurations in the anechoic chamber at the manufacturer’s facility so the EIRP worst case beam-pair were identified.

EIRP was investigated that the dual beam rated maximum EIRP is higher than single beam.

EUT configured to transmit dual beam at the same time.

EUT performs the test in non-signaling mode.

The NR radio operation is controlled via software tool QRCT FTM mode (Factory mode).

The EUT is forced to operate continuously (100% duty cycle) with maximum output power.


Only the worst case setting configuration of the device is reported in the test report.

2.1 Test Mode

For radiated measurement, the pre-scan is performed to find the worst cases EUT position.

| Test Items | Band | Bandwidth (MHz) | | | Modulation DFT-s-OFDM | | | | RB # | | | Test Channel | | |
|------------------------|---|-----------------|-----|-----|--------------------------|------|-------|-------|------|---|------|--------------|---|---|
| | | 50 | 100 | 200 | BPSK | QPSK | 16QAM | 64QAM | 1 | - | Full | L | M | H |
| EIRP | n260 n261 | v | v | v | v | v | v | v | v | | v | v | v | v |
| 99% Occupied Bandwidth | n260 n261 | v | v | v | v | v | v | v | | | v | v | v | v |
| Out of Band Emission | n260 n261 | v | v | v | v | v | v | v | v | | v | | | v |
| Spurious Emission | n260 n261 | v | v | v | v | v | | | v | | | v | v | v |
| Frequency Stability | n260 n261 | CW tone | | | | | | | | | | | v | |
| Remark | <ol style="list-style-type: none"> The mark “v “ means that this configuration is chosen for testing The device is investigated from 30MHz to 100GHz of fundamental signal for radiated spurious emission test under different RB size and modulations in exploratory test. Subsequently, only the worst case emissions are reported. All the radiated test cases were performed with built-in battery. The out of band and spurious emission were measured radiated EIRP. The 200MHz BW is carrier aggregation by 2CC of 100MHz | | | | | | | | | | | | | |

2.2 Connection Diagram of Test System

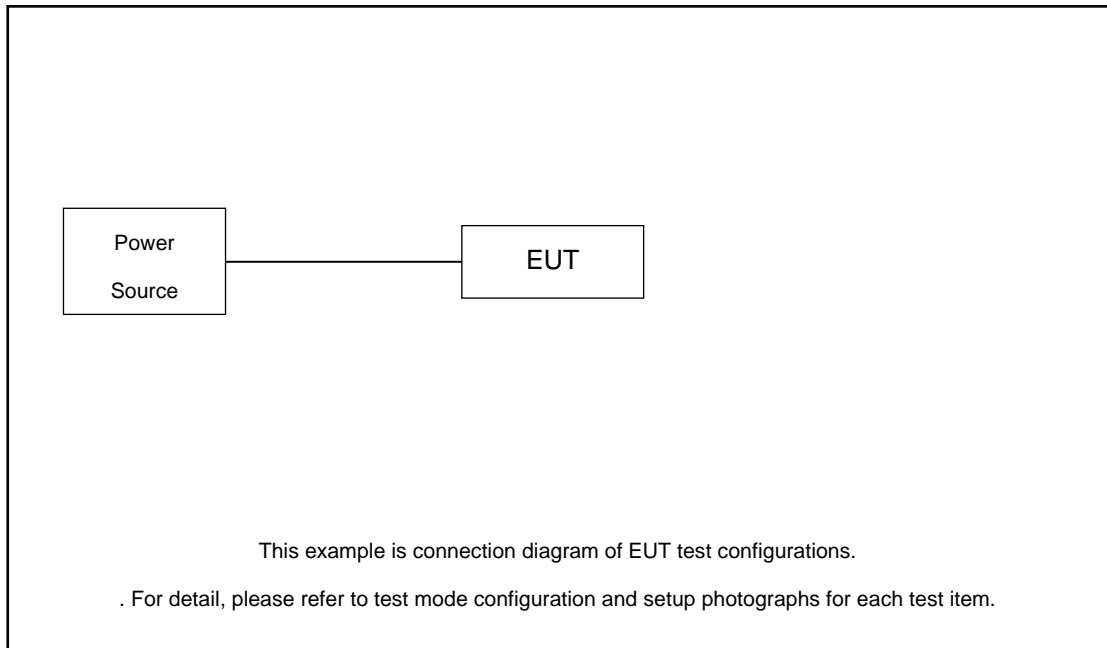

2.3 Measurement Results Explanation Example

According to ANSI C63.26-2015 Section 5.2.7

$$\text{EIRP (dBm)} = \text{E(dBuV/m)} + 20\log(D) - 104.8.$$

where D is the measurement distance (in the far field region) in m.

$$\text{E (dBuV/m)} = \text{Spectrum Reading Level (dBm)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107$$

Hence, the spectrum analyzer *Offset* is derived including RF cable loss and antenna factor.

$$\text{Offset} = \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8$$

The conversion loss of RF mixer is also included by the mixer table of spectrum analyzer when measurement frequency is above 40GHz.

Example :

$$\begin{aligned} \text{Offset} &= \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8 \\ &= 43.8 + 9.51 + 107 + 20\log(1) - 104.8 \\ &= 55.51 \text{ (dB)} \end{aligned}$$



2.4 Far Field Condition for Frequency above 18GHz

| Horn Antenna | Frequency (GHz) | Antenna Dimension A (mm) | Wavelength (λ) (m) | Far field R (m) $\geq 2A^2 / \lambda$ | Measurement Distance (D) (m) | Distance Factor $20\log(D)$ (dB) |
|--------------|-----------------|--------------------------|--------------------|---------------------------------------|------------------------------|----------------------------------|
| BBHA 9170 | 18 | 60 | 0.0167 | 0.43 | 1 | 0.00 |
| | 40 | 60 | 0.0075 | 0.96 | | |
| QWH-UPRR00 | 40 | 48 | 0.0075 | 0.61 | 1 | 0.00 |
| | 60 | 48 | 0.0050 | 0.92 | | |
| QWH-EPRR00 | 60 | 31 | 0.0050 | 0.38 | 1 | 0.00 |
| | 90 | 31 | 0.0033 | 0.58 | | |
| QWH-FPRR00 | 90 | 21 | 0.0033 | 0.26 | 1 | 0.00 |
| | 140 | 21 | 0.0021 | 0.41 | | |
| QWH-GPRR00 | 140 | 15 | 0.0021 | 0.21 | 0.5 | -6.02 |
| | 220 | 15 | 0.0014 | 0.33 | | |

2.5 Frequency List of Low/Middle/High Channels

| NR Band n260 Channel and Frequency List | | | | |
|---|------------------------|--------|--------|---------|
| BW [MHz] | Channel/Frequency(MHz) | Lowest | Middle | Highest |
| 50 | Frequency | 37025 | 38500 | 39975 |
| 100 | Frequency | 37050 | 38500 | 39950 |
| 200 | Frequency 1 | 37050 | 38450 | 39850 |
| | Frequency 2 | 37150 | 38550 | 39950 |

| NR Band n261 Channel and Frequency List | | | | |
|---|------------------------|--------|--------|---------|
| BW [MHz] | Channel/Frequency(MHz) | Lowest | Middle | Highest |
| 50 | Frequency | 27525 | 27925 | 28325 |
| 100 | Frequency | 27550 | 27925 | 28300 |
| 200 | Frequency 1 | 27550 | 27875 | 28200 |
| | Frequency 2 | 27650 | 27975 | 28300 |


3 Radiated Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


For radiated emissions from 30MHz to 1GHz

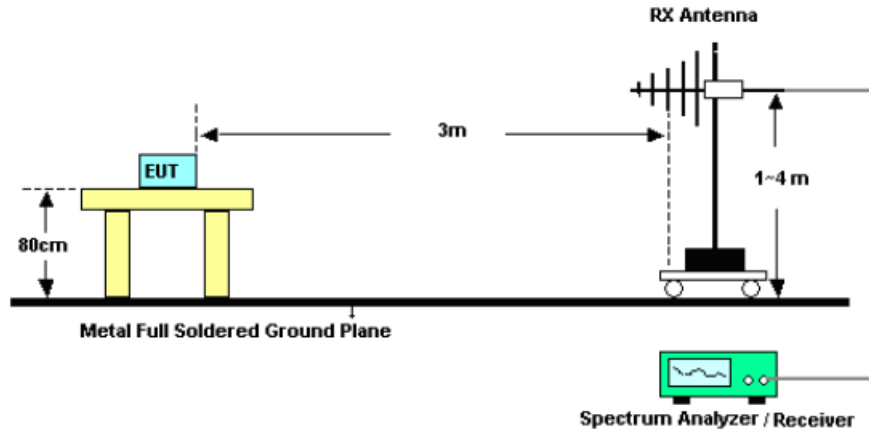


For radiated emissions 1GHz to 18GHz

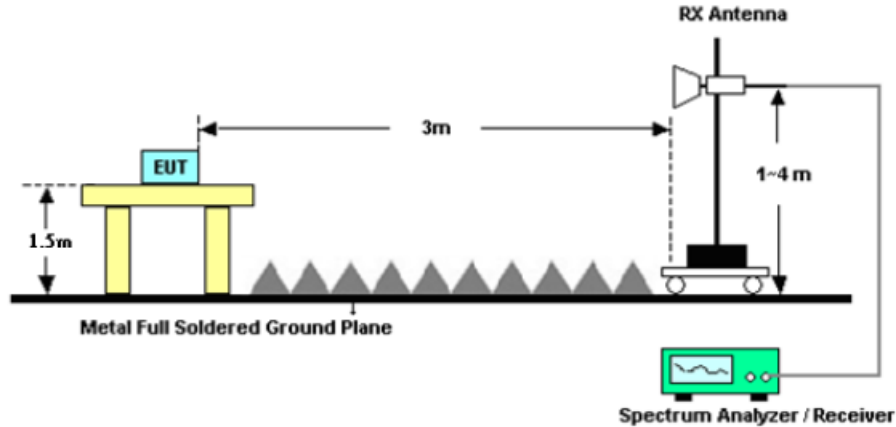


For radiated emissions above 18GHz up to 40GHz

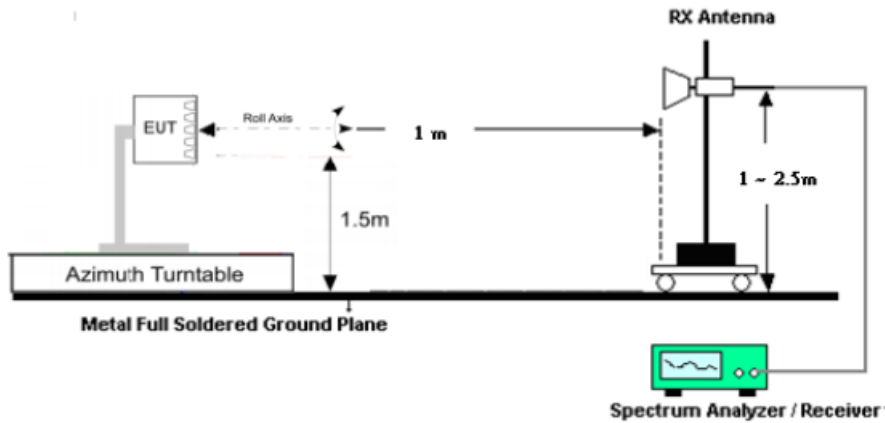

For radiated emissions above 40GHz up to 140GHz

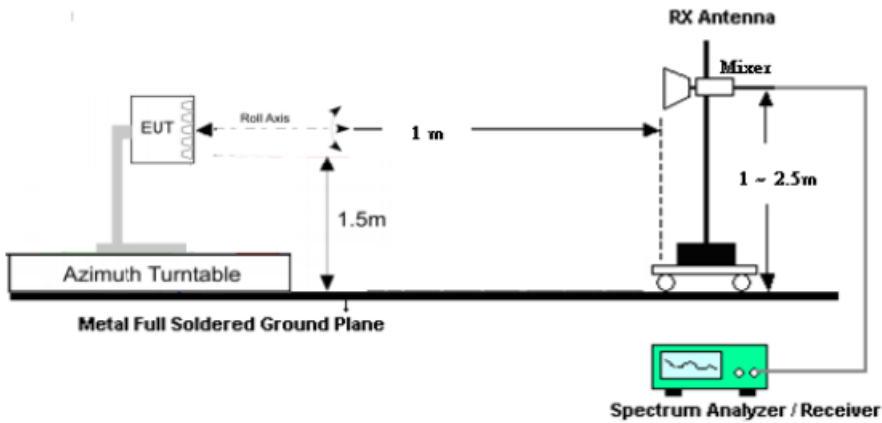

For radiated emissions above 140GHz up to 200GHz

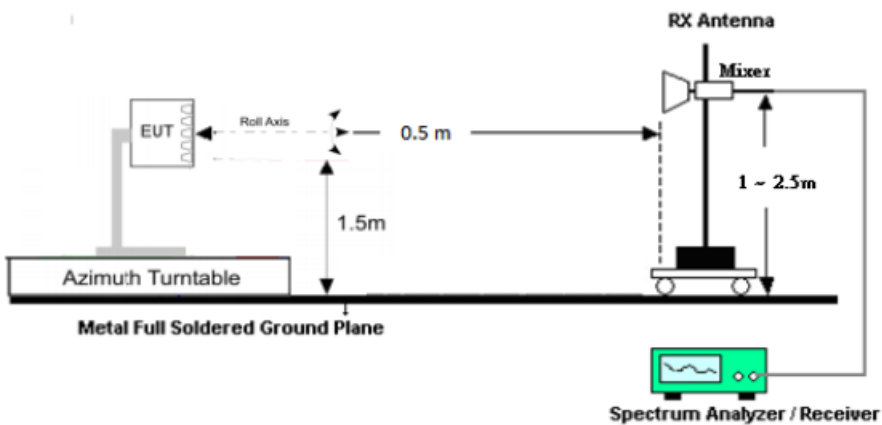

3.3 Test Result of Radiated Test

Please refer to Appendix A.



3.4 EIRP Measurement

3.4.1 Description of EIRP Measurement

For mobile stations, the average power of the sum of all antenna elements is limited to a maximum EIRP of +43 dBm.

3.4.2 Test Procedures

1. Set EUT at maximum output power.
2. Select lowest, middle, and highest channels for each band and different modulation.
3. Enable channel power function of spectrum analyzer
4. Set frequency would like to be investigated.
5. Set Detector = RMS
6. Set Trace mode = trace average
7. Set Sweep time = auto couple
8. Set sweep points $\geq 2 \times \text{Span/RBW}$
9. Set sweep count 100 and wait until the trace to be stabilized
10. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
11. Measure and record the power level from the spectrum analyzer.
12. The test result is calculated according to

ANSI C63.26-2015 Section 5.2.7

$$\text{EIRP (dBm)} = \text{E(dBuV/m)} + 20\log(D) - 104.8.$$

where D is the measurement distance (in the far field region) in m.

$$\text{E (dBuV/m)} = \text{Spectrum Level (dBm)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107$$

That is, set the spectrum offset including sum of

$$\text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8$$



3.5 Occupied Bandwidth

3.5.1 Description of Occupied Bandwidth Measurement

This is for reporting only.

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

3.5.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.4

1. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be at least 1.5 times the anticipated OBW.
2. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
3. Set the detection mode to peak, and the trace mode to max hold.
4. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.6 Radiated Spurious Emission Measurement

3.6.1 Description of Radiated Spurious Emission Measurement

The spectrum is scanned from 30 MHz up to 200GHz.

The conductive power or the total radiated power of any emission outside a licensee's frequency block shall be -13 dBm/MHz or lower. However, in the bands immediately outside and adjacent to the licensee's frequency block, having a bandwidth equal to 10 percent of the channel bandwidth, the conductive power or the total radiated power of any emission shall be -5 dBm/MHz or lower.

3.6.2 Test Procedures

1. Set EUT at maximum output power..
2. Select lowest, middle, and highest channels for each band and different modulation.
3. Measure and record the power level from the spectrum analyzer.
4. Set frequency would like to be investigated.
5. Set Detector = RMS
6. Set Trace mode = trace average
7. Set Sweep time = auto couple
8. Set sweep points $\geq 2 \times \text{Span/RBW}$
9. Set sweep count 100 and wait until the trace to be stabilized
10. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
11. For measurement frequency from 30MHz to 18GHz,
An antenna was substituted in place of the EUT and was driven by a signal generator. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission. Take record of output power and repeat for another polarization.
12. For measurement frequency above 18GHz,
the test result is calculated according to
ANSI C63.26-2015 Section 5.2.7 and 5.7.3 and 5.7.4
$$\text{EIRP (dBm)} = \text{E(dBuV/m)} + 20\log(D) - 104.8.$$
where D is the measurement distance (in the far field region) in m.
$$\text{E (dBuV/m)} = \text{Spectrum Level (dBm)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107$$
That is, set the spectrum offset including sum of
$$\text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8$$
13. The conversion loss of RF mixer is also included in conversion loss table of the spectrum analyzer when measurement frequency is above 40GHz.



3.7 Frequency Stability Measurement

3.7.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.

1. The EUT was set up in the thermal chamber.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.

1. The EUT was placed in a temperature chamber at 20° C.
2. The power supply voltage to the EUT was varied from the lowest to the highest operation range.
3. The variation in frequency was measured for the worst case.



4 List of Measuring Equipment

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Test Date | Due Date | Remark |
|--------------------------------|--------------|----------------|------------|--|------------------|---------------------------------|---------------|--------------------------|
| Spectrum Analyzer | R&S | FSV3044 | 101128 | 9KHz-44GHz | Mar. 03, 2021 | Jan. 06, 2022~ Feb. 18, 2022 | Mar. 02, 2022 | Radiation (03CH02-SZ) |
| Spectrum Analyzer | R&S | FSV40 | 101829 | 10Hz~40GHz | Mar. 08, 2021 | Jan. 06, 2022~ Feb. 18, 2022 | Mar. 07, 2022 | Radiation (03CH02-SZ) |
| Spectrum Analyzer | R&S | FSV40 | NA | 18Ghz-40GHz | Apr. 11, 2021 | Jan. 06, 2022~ Feb. 18, 2022 | Apr. 10, 2022 | Radiation (03CH02-SZ) |
| Harmonic Mixer (*) | R&S | FS-Z60 | 101017 | 40-60GHz | Sep. 19, 2019 | Jan. 06, 2022~ Feb. 18, 2022 | Sep. 18, 2022 | Radiation (03CH02-SZ) |
| Harmonic Mixer (*) | R&S | FS-Z90 | 102037 | 60-90GHz | Oct. 10, 2019 | Jan. 06, 2022~ Feb. 18, 2022 | Oct. 09, 2022 | Radiation (03CH02-SZ) |
| Harmonic Mixer (*) | R&S | FS-Z140 | 101141 | 90-140GHz | Sep. 09, 2019 | Jan. 06, 2022~ Feb. 18, 2022 | Sep. 08, 2022 | Radiation (03CH02-SZ) |
| Harmonic Mixer (*) | R&S | FS-Z220 | 101026 | 140-220GHz | Apr. 09, 2019 | Jan. 06, 2022~ Feb. 18, 2022 | Apr. 08, 2022 | Radiation (03CH02-SZ) |
| Horn Antenna | SCHWARZBECK | BBHA 9170 | 9170 #679 | 15GHz~40GHz | Jul. 26, 2021 | Jan. 06, 2022~ Feb. 18, 2022 | Jul. 25, 2022 | Radiation (03CH02-SZ) |
| Standard Horn Antenna | Quinstar | QWH-UPRR 00 | 01 | 40-60GHz | Jul. 10, 2020 | Jan. 06, 2022~ Feb. 18, 2022 | Jul. 09, 2023 | Radiation (03CH02-SZ) |
| Standard Horn Antenna | Quinstar | QWH-EPRR 00 | 1012700010 | 60-90GHz | Jul. 10, 2020 | Jan. 06, 2022~ Feb. 18, 2022 | Jul. 09, 2023 | Radiation (03CH02-SZ) |
| Standard Horn Antenna | Quinstar | QWH-FPRR 00 | 1011500009 | 90-140GHz | Jul. 10, 2020 | Jan. 06, 2022~ Feb. 18, 2022 | Jul. 09, 2023 | Radiation (03CH02-SZ) |
| Standard Horn Antenna | Quinstar | QWH-GPRR 00 | 01 | 140-220GHz | Jul. 10, 2020 | Jan. 06, 2022~ Feb. 18, 2022 | Jul. 09, 2023 | Radiation (03CH02-SZ) |
| Temperature & Humidity Chamber | ESPEC | SH-241 | 92013271 | Temperature(-40~15 0°C)Humidity (20~95%RH) | May 13, 2021 | Jan. 06, 2022~ Feb. 18, 2022 | May 12, 2022 | Radiation (03CH02-SZ) |
| Turn Table | EMEC | NA | NA | Phi/Theta 0~360 Degree | NCR | Jan. 06, 2022~ Feb. 18, 2022 | NCR | Radiation (03CH02-SZ) |
| Controller | EMEC | EM 1000 | NA | Control Turn table | NCR | Jan. 06, 2022~ Feb. 18, 2022 | NCR | Radiation (03CH02-SZ) |

Note:

- (*) Equipment manufacturer's Calibration Certificate.
- NCR: No Calibration Required



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

| | |
|---|--------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 2.47dB |
|---|--------|

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

| | |
|---|--------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 3.31dB |
|---|--------|

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

| | |
|---|--------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 3.72dB |
|---|--------|

Uncertainty of Radiated Emission Measurement (40 GHz ~ 140 GHz)

| | |
|---|--------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 5.98dB |
|---|--------|

Uncertainty of Radiated Emission Measurement (140 GHz ~ 200 GHz)

| | |
|---|--------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 6.72dB |
|---|--------|



Appendix A. Test Results of EIRP and Radiated Test

EIRP Power(Average power)

NR Band n260 Module 0

| NR Band n260 Module 0 AG0 (Beam ID:29) | | | | | |
|---|----------|----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | |
| | BW [MHz] | Waveform | Modulation | Inner 1RB | Inner Full |
| Lowest | 50 | DFT-S | BPSK | 27.59 | 27.42 |
| | 50 | DFT-S | QPSK | 27.54 | 27.29 |
| | 50 | DFT-S | 16QAM | 25.07 | 25.04 |
| | 50 | DFT-S | 64QAM | 22.55 | 22.87 |
| | 100 | DFT-S | BPSK | 27.00 | 27.14 |
| | 100 | DFT-S | QPSK | 27.31 | 27.03 |
| | 100 | DFT-S | 16QAM | 24.90 | 24.76 |
| | 100 | DFT-S | 64QAM | 22.38 | 22.61 |
| | 200 | DFT-S | BPSK | 20.96 | 23.33 |
| | 200 | DFT-S | QPSK | 21.32 | 23.29 |
| | 200 | DFT-S | 16QAM | 20.78 | 22.55 |
| | 200 | DFT-S | 64QAM | 21.20 | 20.41 |

Note : The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



| NR Band n260 Module 0 AG0 (Beam ID:29) | | | | | |
|---|----------|----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | |
| | BW [MHz] | Waveform | Modulation | Inner 1RB | Inner Full |
| Middle | 50 | DFT-S | BPSK | 27.09 | 27.67 |
| | 50 | DFT-S | QPSK | 27.02 | 27.55 |
| | 50 | DFT-S | 16QAM | 25.19 | 25.28 |
| | 50 | DFT-S | 64QAM | 23.22 | 23.33 |
| | 100 | DFT-S | BPSK | 26.63 | 26.88 |
| | 100 | DFT-S | QPSK | 26.36 | 26.69 |
| | 100 | DFT-S | 16QAM | 24.22 | 24.82 |
| | 100 | DFT-S | 64QAM | 22.36 | 22.69 |
| | 200 | DFT-S | BPSK | 19.60 | 21.98 |
| | 200 | DFT-S | QPSK | 19.53 | 22.04 |
| | 200 | DFT-S | 16QAM | 18.78 | 21.36 |
| | 200 | DFT-S | 64QAM | 19.10 | 19.30 |

Note : The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



| NR Band n260 Module 0 AG0 (Beam ID: 29) | | | | | |
|---|----------|----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | |
| | BW [MHz] | Waveform | Modulation | Inner 1RB | Inner Full |
| Highest | 50 | DFT-S | BPSK | 27.82 | 27.87 |
| | 50 | DFT-S | QPSK | 27.90 | 27.71 |
| | 50 | DFT-S | 16QAM | 25.63 | 25.49 |
| | 50 | DFT-S | 64QAM | 23.00 | 23.45 |
| | 100 | DFT-S | BPSK | 26.75 | 27.03 |
| | 100 | DFT-S | QPSK | 27.21 | 27.03 |
| | 100 | DFT-S | 16QAM | 25.04 | 24.73 |
| | 100 | DFT-S | 64QAM | 22.41 | 22.65 |
| | 200 | DFT-S | BPSK | 19.86 | 22.08 |
| | 200 | DFT-S | QPSK | 19.84 | 22.06 |
| | 200 | DFT-S | 16QAM | 19.44 | 21.34 |
| | 200 | DFT-S | 64QAM | 19.65 | 19.33 |

Note : The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



| NR Band n260 Module 0 AG1 (Beam ID:157) | | | | | |
|--|----------|----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | |
| | BW [MHz] | Waveform | Modulation | Inner 1RB | Inner Full |
| Lowest | 50 | DFT-S | BPSK | 27.47 | 27.19 |
| | 50 | DFT-S | QPSK | 27.57 | 27.20 |
| | 50 | DFT-S | 16QAM | 25.64 | 24.83 |
| | 50 | DFT-S | 64QAM | 22.82 | 22.81 |
| | 100 | DFT-S | BPSK | 27.38 | 27.10 |
| | 100 | DFT-S | QPSK | 27.49 | 27.11 |
| | 100 | DFT-S | 16QAM | 25.52 | 25.00 |
| | 100 | DFT-S | 64QAM | 22.73 | 22.64 |
| | 200 | DFT-S | BPSK | 19.08 | 22.08 |
| | 200 | DFT-S | QPSK | 19.44 | 22.14 |
| | 200 | DFT-S | 16QAM | 19.19 | 21.54 |
| | 200 | DFT-S | 64QAM | 19.32 | 19.16 |

Note : The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



| NR Band n260 Module 0 AG1 (Beam ID: 157) | | | | | |
|--|----------|----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | |
| | BW [MHz] | Waveform | Modulation | Inner 1RB | Inner Full |
| Middle | 50 | DFT-S | BPSK | 26.57 | 26.68 |
| | 50 | DFT-S | QPSK | 26.55 | 26.76 |
| | 50 | DFT-S | 16QAM | 24.32 | 24.66 |
| | 50 | DFT-S | 64QAM | 21.60 | 22.57 |
| | 100 | DFT-S | BPSK | 25.98 | 26.22 |
| | 100 | DFT-S | QPSK | 26.02 | 26.06 |
| | 100 | DFT-S | 16QAM | 23.97 | 24.04 |
| | 100 | DFT-S | 64QAM | 21.27 | 22.07 |
| | 200 | DFT-S | BPSK | 19.74 | 22.37 |
| | 200 | DFT-S | QPSK | 19.86 | 22.35 |
| | 200 | DFT-S | 16QAM | 19.34 | 21.81 |
| | 200 | DFT-S | 64QAM | 19.25 | 19.72 |

Note : The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



| NR Band n260 Module 0 AG1 (Beam ID:157) | | | | | |
|--|----------|----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | |
| | BW [MHz] | Waveform | Modulation | Inner 1RB | Inner Full |
| Highest | 50 | DFT-S | BPSK | 27.17 | 27.11 |
| | 50 | DFT-S | QPSK | 27.26 | 27.10 |
| | 50 | DFT-S | 16QAM | 25.47 | 24.86 |
| | 50 | DFT-S | 64QAM | 22.76 | 22.93 |
| | 100 | DFT-S | BPSK | 26.51 | 26.40 |
| | 100 | DFT-S | QPSK | 26.74 | 26.47 |
| | 100 | DFT-S | 16QAM | 24.91 | 24.57 |
| | 100 | DFT-S | 64QAM | 22.21 | 22.20 |
| | 200 | DFT-S | BPSK | 19.22 | 21.80 |
| | 200 | DFT-S | QPSK | 19.79 | 21.75 |
| | 200 | DFT-S | 16QAM | 20.17 | 21.24 |
| | 200 | DFT-S | 64QAM | 19.61 | 19.10 |

Note : The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



Note: For Beam ID 29+157 & 30 +158, the whole testing has assessed only Beam ID 29+157 by referring to their higher test level.

| NR Band n260 Module 0 AG0+1 (Beam ID:29+157) | | | | | |
|---|----------|----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | |
| | BW [MHz] | Waveform | Modulation | Inner 1RB | Inner Full |
| Lowest | 50 | DFT-S | BPSK | 29.71 | 29.32 |
| | 50 | DFT-S | QPSK | 29.73 | 29.31 |
| | 50 | DFT-S | 16QAM | 26.95 | 27.11 |
| | 50 | DFT-S | 64QAM | 25.90 | 24.82 |
| | 100 | DFT-S | BPSK | 29.24 | 29.34 |
| | 100 | DFT-S | QPSK | 29.22 | 29.44 |
| | 100 | DFT-S | 16QAM | 27.02 | 27.12 |
| | 100 | DFT-S | 64QAM | 24.87 | 25.06 |
| | 200 | DFT-S | BPSK | 24.06 | 25.22 |
| | 200 | DFT-S | QPSK | 24.29 | 25.24 |
| | 200 | DFT-S | 16QAM | 23.27 | 24.54 |
| | 200 | DFT-S | 64QAM | 23.64 | 22.66 |

Note : The 200MHz Bw is carrier aggregation by 2CC of 100MHz.




| NR Band n260 Module 0 AG0+1 (Beam ID:29+157) | | | | | |
|---|----------|----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | |
| | BW [MHz] | Waveform | Modulation | Inner 1RB | Inner Full |
| Middle | 50 | DFT-S | BPSK | 29.71 | 29.33 |
| | 50 | DFT-S | QPSK | 29.44 | 29.17 |
| | 50 | DFT-S | 16QAM | 27.44 | 27.09 |
| | 50 | DFT-S | 64QAM | 26.00 | 25.13 |
| | 100 | DFT-S | BPSK | 29.68 | 29.82 |
| | 100 | DFT-S | QPSK | 29.57 | 29.80 |
| | 100 | DFT-S | 16QAM | 27.55 | 27.81 |
| | 100 | DFT-S | 64QAM | 26.21 | 25.76 |
| | 100 | CP | QPSK | 25.47 | 26.39 |
| | 100 | CP | 16QAM | 24.19 | 25.18 |
| | 100 | CP | 64QAM | 22.77 | 23.25 |
| | 200 | DFT-S | BPSK | 23.61 | 24.52 |
| | 200 | DFT-S | QPSK | 23.31 | 24.55 |
| | 200 | DFT-S | 16QAM | 23.17 | 24.13 |
| | 200 | DFT-S | 64QAM | 23.12 | 22.03 |

Note : The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



| NR Band n260 Module 0 AG0+1 (Beam ID:29+157) | | | | | |
|---|----------|----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | |
| | BW [MHz] | Waveform | Modulation | Inner 1RB | Inner Full |
| Highest | 50 | DFT-S | BPSK | 29.17 | 29.67 |
| | 50 | DFT-S | QPSK | 29.08 | 29.60 |
| | 50 | DFT-S | 16QAM | 26.37 | 27.48 |
| | 50 | DFT-S | 64QAM | 24.63 | 25.47 |
| | 100 | DFT-S | BPSK | 29.23 | 29.26 |
| | 100 | DFT-S | QPSK | 29.25 | 29.01 |
| | 100 | DFT-S | 16QAM | 27.56 | 26.99 |
| | 100 | DFT-S | 64QAM | 25.76 | 24.97 |
| | 200 | DFT-S | BPSK | 23.42 | 24.26 |
| | 200 | DFT-S | QPSK | 23.42 | 24.16 |
| | 200 | DFT-S | 16QAM | 23.03 | 23.69 |
| | 200 | DFT-S | 64QAM | 22.78 | 22.85 |

Note : The 200MHz Bw is carrier aggregation by 2CC of 100MHz.

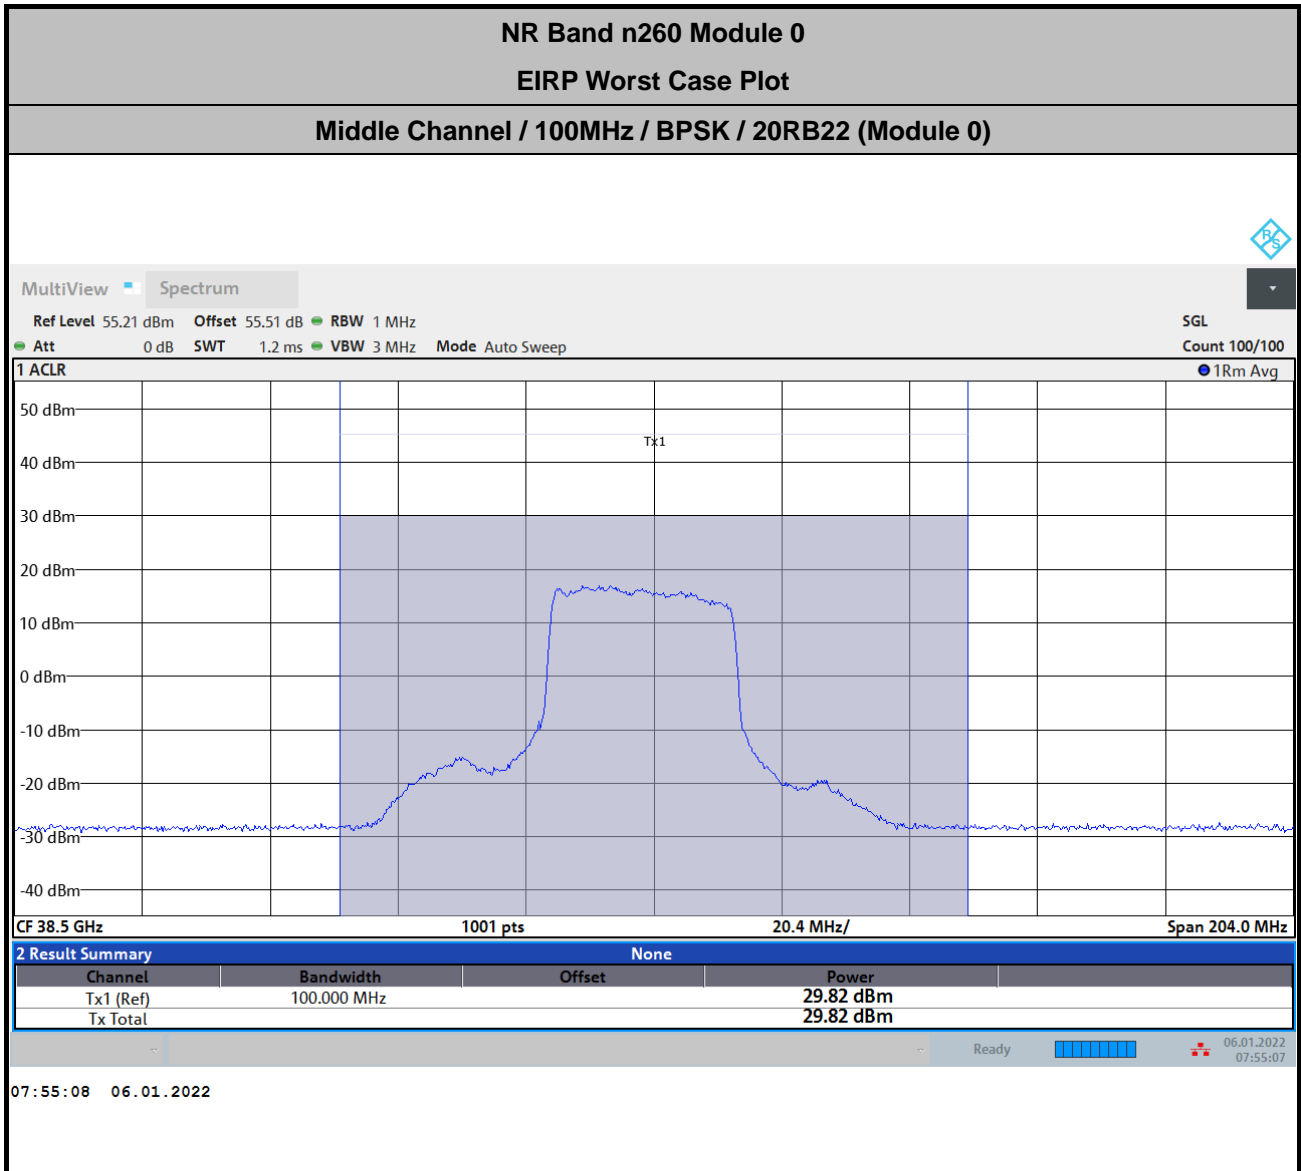

$$\text{Offset} = \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8$$

$$= 43.8 + 9.51 + 107 + 20\log(1) - 104.8 = 55.51 \text{ (dB)}$$



NR Band n260 Module 1

| NR Band n260 Module 1 AG0 (Beam ID:24) | | | | | |
|---|----------|----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | |
| | BW [MHz] | Waveform | Modulation | Inner 1RB | Inner Full |
| Lowest | 50 | DFT-S | BPSK | 29.00 | 28.99 |
| | 50 | DFT-S | QPSK | 29.06 | 28.97 |
| | 50 | DFT-S | 16QAM | 26.38 | 26.78 |
| | 50 | DFT-S | 64QAM | 24.53 | 24.42 |
| | 100 | DFT-S | BPSK | 28.87 | 28.73 |
| | 100 | DFT-S | QPSK | 28.88 | 28.78 |
| | 100 | DFT-S | 16QAM | 26.10 | 26.53 |
| | 100 | DFT-S | 64QAM | 24.36 | 24.24 |
| | 200 | DFT-S | BPSK | 22.62 | 24.48 |
| | 200 | DFT-S | QPSK | 22.47 | 24.55 |
| | 200 | DFT-S | 16QAM | 22.44 | 23.90 |
| | 200 | DFT-S | 64QAM | 22.51 | 21.67 |

Note : The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



| NR Band n260 Module 1 AG0 (Beam ID:24) | | | | | |
|---|----------|----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | |
| | BW [MHz] | Waveform | Modulation | Inner 1RB | Inner Full |
| Middle | 50 | DFT-S | BPSK | 28.83 | 29.20 |
| | 50 | DFT-S | QPSK | 29.11 | 29.04 |
| | 50 | DFT-S | 16QAM | 26.58 | 26.93 |
| | 50 | DFT-S | 64QAM | 24.51 | 24.80 |
| | 100 | DFT-S | BPSK | 28.25 | 28.51 |
| | 100 | DFT-S | QPSK | 28.54 | 28.51 |
| | 100 | DFT-S | 16QAM | 26.16 | 26.49 |
| | 100 | DFT-S | 64QAM | 23.93 | 24.34 |
| | 200 | DFT-S | BPSK | 21.48 | 24.76 |
| | 200 | DFT-S | QPSK | 21.11 | 24.88 |
| | 200 | DFT-S | 16QAM | 21.68 | 24.24 |
| | 200 | DFT-S | 64QAM | 21.85 | 22.16 |

Note : The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



| NR Band n260 Module 1 AG0 (Beam ID: 24) | | | | | |
|---|----------|----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | |
| | BW [MHz] | Waveform | Modulation | Inner 1RB | Inner Full |
| Highest | 50 | DFT-S | BPSK | 28.21 | 28.65 |
| | 50 | DFT-S | QPSK | 28.28 | 28.29 |
| | 50 | DFT-S | 16QAM | 25.84 | 26.09 |
| | 50 | DFT-S | 64QAM | 23.98 | 23.90 |
| | 100 | DFT-S | BPSK | 27.52 | 27.38 |
| | 100 | DFT-S | QPSK | 27.48 | 27.31 |
| | 100 | DFT-S | 16QAM | 24.98 | 25.08 |
| | 100 | DFT-S | 64QAM | 22.64 | 22.85 |
| | 200 | DFT-S | BPSK | 20.88 | 23.00 |
| | 200 | DFT-S | QPSK | 20.83 | 23.16 |
| | 200 | DFT-S | 16QAM | 20.75 | 22.48 |
| | 200 | DFT-S | 64QAM | 21.09 | 20.54 |

Note : The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



| NR Band n260 Module 1 AG1 (Beam ID:152) | | | | | |
|--|----------|----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | |
| | BW [MHz] | Waveform | Modulation | Inner 1RB | Inner Full |
| Lowest | 50 | DFT-S | BPSK | 24.69 | 24.82 |
| | 50 | DFT-S | QPSK | 24.91 | 24.69 |
| | 50 | DFT-S | 16QAM | 22.88 | 22.61 |
| | 50 | DFT-S | 64QAM | 20.11 | 20.62 |
| | 100 | DFT-S | BPSK | 25.03 | 25.05 |
| | 100 | DFT-S | QPSK | 24.81 | 24.89 |
| | 100 | DFT-S | 16QAM | 22.04 | 22.80 |
| | 100 | DFT-S | 64QAM | 20.48 | 20.44 |
| | 200 | DFT-S | BPSK | 18.52 | 20.50 |
| | 200 | DFT-S | QPSK | 18.64 | 20.50 |
| | 200 | DFT-S | 16QAM | 18.50 | 19.91 |
| | 200 | DFT-S | 64QAM | 18.42 | 17.71 |

Note : The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



| NR Band n260 Module 1 AG1 (Beam ID: 152) | | | | | |
|--|----------|----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | |
| | BW [MHz] | Waveform | Modulation | Inner 1RB | Inner Full |
| Middle | 50 | DFT-S | BPSK | 27.78 | 27.73 |
| | 50 | DFT-S | QPSK | 27.76 | 27.77 |
| | 50 | DFT-S | 16QAM | 24.79 | 24.88 |
| | 50 | DFT-S | 64QAM | 23.36 | 23.09 |
| | 100 | DFT-S | BPSK | 27.61 | 27.70 |
| | 100 | DFT-S | QPSK | 27.77 | 27.70 |
| | 100 | DFT-S | 16QAM | 25.25 | 25.67 |
| | 100 | DFT-S | 64QAM | 23.87 | 23.69 |
| | 200 | DFT-S | BPSK | 20.39 | 22.95 |
| | 200 | DFT-S | QPSK | 20.54 | 22.90 |
| | 200 | DFT-S | 16QAM | 20.01 | 22.16 |
| | 200 | DFT-S | 64QAM | 19.57 | 20.25 |

Note : The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



| NR Band n260 Module 1 AG1 (Beam ID:152) | | | | | |
|--|----------|----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | |
| | BW [MHz] | Waveform | Modulation | Inner 1RB | Inner Full |
| Highest | 50 | DFT-S | BPSK | 27.13 | 27.51 |
| | 50 | DFT-S | QPSK | 27.31 | 27.48 |
| | 50 | DFT-S | 16QAM | 24.63 | 25.27 |
| | 50 | DFT-S | 64QAM | 22.86 | 23.01 |
| | 100 | DFT-S | BPSK | 27.16 | 27.05 |
| | 100 | DFT-S | QPSK | 27.36 | 27.06 |
| | 100 | DFT-S | 16QAM | 24.98 | 25.08 |
| | 100 | DFT-S | 64QAM | 22.64 | 22.85 |
| | 200 | DFT-S | BPSK | 20.19 | 22.44 |
| | 200 | DFT-S | QPSK | 20.15 | 22.41 |
| | 200 | DFT-S | 16QAM | 20.27 | 21.78 |
| | 200 | DFT-S | 64QAM | 20.22 | 19.59 |

Note : The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



| NR Band n260 Module 1 AG0+1 (Beam ID:24+152) | | | | | |
|---|----------|----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | |
| | BW [MHz] | Waveform | Modulation | Inner 1RB | Inner Full |
| Lowest | 50 | DFT-S | BPSK | 29.16 | 28.10 |
| | 50 | DFT-S | QPSK | 28.86 | 27.89 |
| | 50 | DFT-S | 16QAM | 26.97 | 25.68 |
| | 50 | DFT-S | 64QAM | 24.58 | 23.88 |
| | 100 | DFT-S | BPSK | 29.22 | 28.18 |
| | 100 | DFT-S | QPSK | 28.95 | 28.10 |
| | 100 | DFT-S | 16QAM | 26.51 | 25.96 |
| | 100 | DFT-S | 64QAM | 24.85 | 24.08 |
| | 200 | DFT-S | BPSK | 18.95 | 24.03 |
| | 200 | DFT-S | QPSK | 18.77 | 24.07 |
| | 200 | DFT-S | 16QAM | 19.25 | 23.71 |
| | 200 | DFT-S | 64QAM | 19.32 | 21.84 |

Note : The 200MHz Bw is carrier aggregation by 2CC of 100MHz.




| NR Band n260 Module 1 AG0+1 (Beam ID:24+152) | | | | | |
|---|----------|----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | |
| | BW [MHz] | Waveform | Modulation | Inner 1RB | Inner Full |
| Middle | 50 | DFT-S | BPSK | 29.03 | 29.36 |
| | 50 | DFT-S | QPSK | 29.30 | 29.30 |
| | 50 | DFT-S | 16QAM | 26.67 | 27.12 |
| | 50 | DFT-S | 64QAM | 24.76 | 25.44 |
| | 50 | CP | QPSK | 26.45 | 25.50 |
| | 50 | CP | 16QAM | 24.40 | 23.64 |
| | 50 | CP | 64QAM | 22.39 | 22.37 |
| | 100 | DFT-S | BPSK | 28.43 | 28.67 |
| | 100 | DFT-S | QPSK | 28.70 | 28.76 |
| | 100 | DFT-S | 16QAM | 25.88 | 26.61 |
| | 100 | DFT-S | 64QAM | 24.10 | 24.59 |
| | 200 | DFT-S | BPSK | 20.90 | 23.81 |
| | 200 | DFT-S | QPSK | 20.26 | 23.76 |
| | 200 | DFT-S | 16QAM | 20.59 | 23.26 |
| | 200 | DFT-S | 64QAM | 20.22 | 21.04 |

Note : The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



| NR Band n260 Module 1 AG0+1 (Beam ID:24+152) | | | | | |
|---|----------|----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | |
| | BW [MHz] | Waveform | Modulation | Inner 1RB | Inner Full |
| Highest | 50 | DFT-S | BPSK | 28.09 | 27.89 |
| | 50 | DFT-S | QPSK | 28.06 | 27.91 |
| | 50 | DFT-S | 16QAM | 25.55 | 25.88 |
| | 50 | DFT-S | 64QAM | 23.26 | 23.82 |
| | 100 | DFT-S | BPSK | 28.71 | 28.11 |
| | 100 | DFT-S | QPSK | 28.63 | 28.05 |
| | 100 | DFT-S | 16QAM | 26.24 | 26.13 |
| | 100 | DFT-S | 64QAM | 23.90 | 23.92 |
| | 200 | DFT-S | BPSK | 20.43 | 23.45 |
| | 200 | DFT-S | QPSK | 20.19 | 23.38 |
| | 200 | DFT-S | 16QAM | 20.61 | 22.96 |
| | 200 | DFT-S | 64QAM | 20.30 | 20.86 |

Note : The 200MHz Bw is carrier aggregation by 2CC of 100MHz.

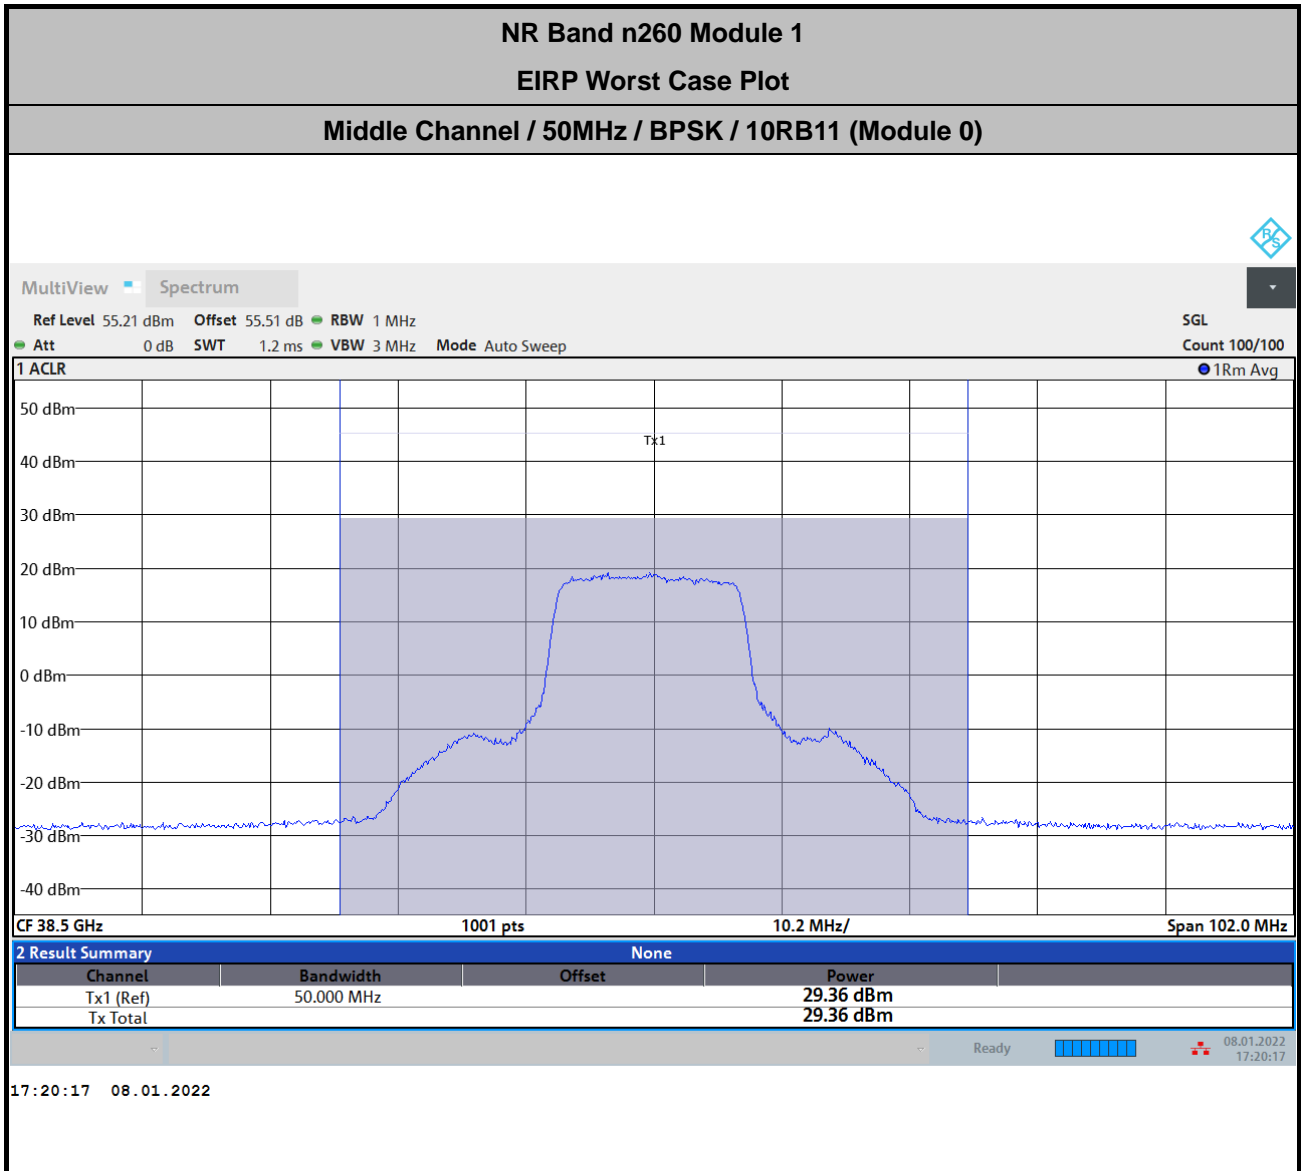

$$\text{Offset} = \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8$$

$$= 43.8 + 9.51 + 107 + 20\log(1) - 104.8 = 55.51 \text{ (dB)}$$



NR Band n261 Module 0

| NR Band n261 Module 0 AG0 (Beam ID:23) | | | | | |
|--|----------|----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | |
| | BW [MHz] | Waveform | Modulation | Inner 1RB | Inner Full |
| Lowest | 50 | DFT-S | BPSK | 28.05 | 27.74 |
| | 50 | DFT-S | QPSK | 27.90 | 27.80 |
| | 50 | DFT-S | 16QAM | 25.75 | 26.55 |
| | 50 | DFT-S | 64QAM | 23.90 | 23.99 |
| | 100 | DFT-S | BPSK | 27.76 | 27.66 |
| | 100 | DFT-S | QPSK | 27.46 | 27.78 |
| | 100 | DFT-S | 16QAM | 25.43 | 25.59 |
| | 100 | DFT-S | 64QAM | 23.48 | 23.63 |
| | 200 | DFT-S | BPSK | 21.07 | 24.20 |
| | 200 | DFT-S | QPSK | 21.18 | 24.26 |
| | 200 | DFT-S | 16QAM | 20.71 | 23.59 |
| | 200 | DFT-S | 64QAM | 20.94 | 21.54 |

Note : The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



| NR Band n261 Module 0 AG0 (Beam ID:23) | | | | | |
|---|----------|----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | |
| | BW [MHz] | Waveform | Modulation | Inner 1RB | Inner Full |
| Middle | 50 | DFT-S | BPSK | 26.94 | 26.89 |
| | 50 | DFT-S | QPSK | 27.27 | 26.84 |
| | 50 | DFT-S | 16QAM | 24.75 | 24.80 |
| | 50 | DFT-S | 64QAM | 23.56 | 22.41 |
| | 100 | DFT-S | BPSK | 27.57 | 27.34 |
| | 100 | DFT-S | QPSK | 27.97 | 27.36 |
| | 100 | DFT-S | 16QAM | 25.38 | 25.21 |
| | 100 | DFT-S | 64QAM | 24.22 | 22.88 |
| | 200 | DFT-S | BPSK | 20.36 | 23.64 |
| | 200 | DFT-S | QPSK | 20.57 | 23.71 |
| | 200 | DFT-S | 16QAM | 20.16 | 23.07 |
| | 200 | DFT-S | 64QAM | 21.29 | 21.13 |

Note : The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



| NR Band n261 Module 0 AG0 (Beam ID: 23) | | | | | |
|---|----------|----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | |
| | BW [MHz] | Waveform | Modulation | Inner 1RB | Inner Full |
| Highest | 50 | DFT-S | BPSK | 26.90 | 27.10 |
| | 50 | DFT-S | QPSK | 27.28 | 27.17 |
| | 50 | DFT-S | 16QAM | 25.42 | 25.09 |
| | 50 | DFT-S | 64QAM | 23.11 | 22.72 |
| | 100 | DFT-S | BPSK | 27.39 | 27.34 |
| | 100 | DFT-S | QPSK | 27.59 | 27.39 |
| | 100 | DFT-S | 16QAM | 25.58 | 25.23 |
| | 100 | DFT-S | 64QAM | 23.71 | 23.21 |
| | 200 | DFT-S | BPSK | 20.18 | 23.36 |
| | 200 | DFT-S | QPSK | 20.63 | 23.43 |
| | 200 | DFT-S | 16QAM | 20.68 | 22.73 |
| | 200 | DFT-S | 64QAM | 20.56 | 20.71 |

Note : The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



| NR Band n261 Module 0 AG1 (Beam ID:151) | | | | | |
|---|----------|----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | |
| | BW [MHz] | Waveform | Modulation | Inner 1RB | Inner Full |
| Lowest | 50 | DFT-S | BPSK | 29.24 | 28.55 |
| | 50 | DFT-S | QPSK | 29.05 | 28.44 |
| | 50 | DFT-S | 16QAM | 26.92 | 26.36 |
| | 50 | DFT-S | 64QAM | 25.07 | 24.68 |
| | 100 | DFT-S | BPSK | 29.06 | 28.70 |
| | 100 | DFT-S | QPSK | 28.96 | 28.74 |
| | 100 | DFT-S | 16QAM | 26.91 | 26.67 |
| | 100 | DFT-S | 64QAM | 25.02 | 24.60 |
| | 200 | DFT-S | BPSK | 21.50 | 24.60 |
| | 200 | DFT-S | QPSK | 21.30 | 24.70 |
| | 200 | DFT-S | 16QAM | 21.39 | 24.03 |
| | 200 | DFT-S | 64QAM | 21.66 | 21.92 |

Note : The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



| NR Band n261 Module 0 AG1 (Beam ID:151) | | | | | |
|---|----------|----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | |
| | BW [MHz] | Waveform | Modulation | Inner 1RB | Inner Full |
| Middle | 50 | DFT-S | BPSK | 27.46 | 27.52 |
| | 50 | DFT-S | QPSK | 27.72 | 27.64 |
| | 50 | DFT-S | 16QAM | 25.82 | 25.59 |
| | 50 | DFT-S | 64QAM | 23.68 | 23.31 |
| | 100 | DFT-S | BPSK | 28.20 | 28.35 |
| | 100 | DFT-S | QPSK | 28.52 | 28.52 |
| | 100 | DFT-S | 16QAM | 26.42 | 26.25 |
| | 100 | DFT-S | 64QAM | 24.38 | 24.22 |
| | 200 | DFT-S | BPSK | 21.69 | 23.92 |
| | 200 | DFT-S | QPSK | 21.30 | 23.95 |
| | 200 | DFT-S | 16QAM | 21.75 | 23.34 |
| | 200 | DFT-S | 64QAM | 21.14 | 21.44 |

Note : The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



| NR Band n261 Module 0 AG1 (Beam ID:151) | | | | | |
|---|----------|----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | |
| | BW [MHz] | Waveform | Modulation | Inner 1RB | Inner Full |
| Highest | 50 | DFT-S | BPSK | 28.18 | 28.12 |
| | 50 | DFT-S | QPSK | 27.75 | 28.10 |
| | 50 | DFT-S | 16QAM | 26.09 | 26.16 |
| | 50 | DFT-S | 64QAM | 24.15 | 23.68 |
| | 100 | DFT-S | BPSK | 28.62 | 28.48 |
| | 100 | DFT-S | QPSK | 28.29 | 28.44 |
| | 100 | DFT-S | 16QAM | 26.49 | 26.42 |
| | 100 | DFT-S | 64QAM | 24.78 | 24.43 |
| | 200 | DFT-S | BPSK | 21.62 | 24.80 |
| | 200 | DFT-S | QPSK | 22.09 | 24.80 |
| | 200 | DFT-S | 16QAM | 21.60 | 24.14 |
| | 200 | DFT-S | 64QAM | 21.69 | 22.03 |

Note : The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



Note: For Beam ID 23+151 & 31 +159, the whole testing has assessed only Beam ID 23+151 by referring to their higher test level.

| NR Band n261 Module 0 AG0+1 (Beam ID:23+151) | | | | | |
|--|----------|----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | |
| | BW [MHz] | Waveform | Modulation | Inner 1RB | Inner Full |
| Lowest | 50 | DFT-S | BPSK | 29.33 | 28.98 |
| | 50 | DFT-S | QPSK | 29.28 | 28.99 |
| | 50 | DFT-S | 16QAM | 27.13 | 26.84 |
| | 50 | DFT-S | 64QAM | 25.18 | 24.59 |
| | 100 | DFT-S | BPSK | 28.97 | 28.04 |
| | 100 | DFT-S | QPSK | 28.91 | 28.01 |
| | 100 | DFT-S | 16QAM | 26.69 | 25.82 |
| | 100 | DFT-S | 64QAM | 24.98 | 23.61 |
| | 200 | DFT-S | BPSK | 21.55 | 24.23 |
| | 200 | DFT-S | QPSK | 21.55 | 24.28 |
| | 200 | DFT-S | 16QAM | 21.65 | 23.54 |
| | 200 | DFT-S | 64QAM | 21.14 | 21.38 |

Note : The 200MHz Bw is carrier aggregation by 2CC of 100MHz.




| NR Band n261 Module 0 AG0+1 (Beam ID:23+151) | | | | | |
|--|----------|----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | |
| | BW [MHz] | Waveform | Modulation | Inner 1RB | Inner Full |
| Middle | 50 | DFT-S | BPSK | 29.16 | 28.51 |
| | 50 | DFT-S | QPSK | 29.27 | 28.53 |
| | 50 | DFT-S | 16QAM | 27.20 | 26.47 |
| | 50 | DFT-S | 64QAM | 24.71 | 23.85 |
| | 100 | DFT-S | BPSK | 29.13 | 29.03 |
| | 100 | DFT-S | QPSK | 29.47 | 28.94 |
| | 100 | DFT-S | 16QAM | 27.03 | 26.92 |
| | 100 | DFT-S | 64QAM | 24.62 | 24.83 |
| | 100 | CP | QPSK | 25.90 | 26.18 |
| | 100 | CP | 16QAM | 24.57 | 24.80 |
| | 100 | CP | 64QAM | 23.09 | 22.59 |
| | 200 | DFT-S | BPSK | 20.84 | 24.15 |
| | 200 | DFT-S | QPSK | 21.32 | 24.17 |
| | 200 | DFT-S | 16QAM | 20.72 | 23.54 |
| | 200 | DFT-S | 64QAM | 20.74 | 21.50 |

Note : The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



| NR Band n261 Module 0 AG0+1 (Beam ID:23+151) | | | | | |
|--|----------|----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | |
| | BW [MHz] | Waveform | Modulation | Inner 1RB | Inner Full |
| Highest | 50 | DFT-S | BPSK | 29.23 | 29.07 |
| | 50 | DFT-S | QPSK | 28.98 | 28.73 |
| | 50 | DFT-S | 16QAM | 27.40 | 26.85 |
| | 50 | DFT-S | 64QAM | 26.26 | 24.55 |
| | 100 | DFT-S | BPSK | 29.35 | 29.19 |
| | 100 | DFT-S | QPSK | 29.22 | 29.22 |
| | 100 | DFT-S | 16QAM | 27.54 | 27.28 |
| | 100 | DFT-S | 64QAM | 26.50 | 25.16 |
| | 200 | DFT-S | BPSK | 22.20 | 24.44 |
| | 200 | DFT-S | QPSK | 22.66 | 24.35 |
| | 200 | DFT-S | 16QAM | 22.57 | 23.71 |
| | 200 | DFT-S | 64QAM | 21.99 | 21.67 |

Note : The 200MHz Bw is carrier aggregation by 2CC of 100MHz.

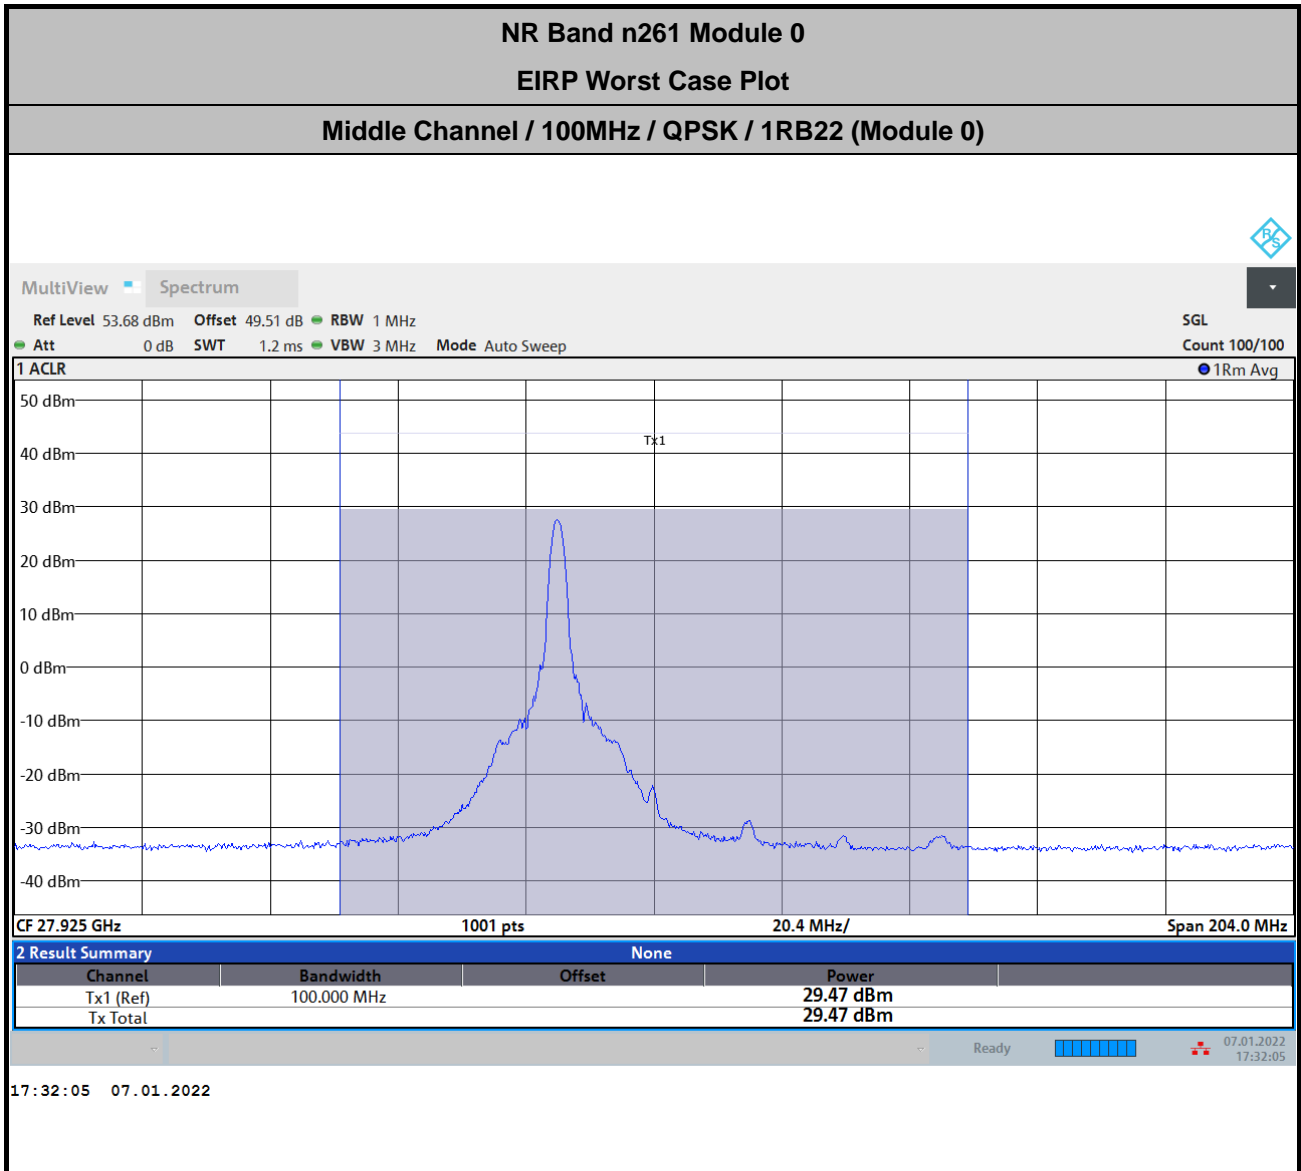

$$\text{Offset} = \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8$$

$$= 39.6 + 7.71 + 107 + 20\log(1) - 104.8 = 49.51 \text{ (dB)}$$



NR Band n261 Module 1

| NR Band n261 Module 1 AG0 (Beam ID:18) | | | | | |
|--|----------|----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | |
| | BW [MHz] | Waveform | Modulation | Inner 1RB | Inner Full |
| Lowest | 50 | DFT-S | BPSK | 28.80 | 28.89 |
| | 50 | DFT-S | QPSK | 28.93 | 28.67 |
| | 50 | DFT-S | 16QAM | 26.49 | 26.52 |
| | 50 | DFT-S | 64QAM | 24.10 | 24.57 |
| | 100 | DFT-S | BPSK | 28.52 | 28.31 |
| | 100 | DFT-S | QPSK | 28.53 | 28.34 |
| | 100 | DFT-S | 16QAM | 26.11 | 26.23 |
| | 100 | DFT-S | 64QAM | 24.02 | 24.08 |
| | 200 | DFT-S | BPSK | 22.40 | 25.53 |
| | 200 | DFT-S | QPSK | 21.90 | 25.62 |
| | 200 | DFT-S | 16QAM | 22.22 | 25.07 |
| | 200 | DFT-S | 64QAM | 22.76 | 22.87 |

Note : The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



| NR Band n261 Module 1 AG0 (Beam ID:18) | | | | | |
|--|----------|----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | |
| | BW [MHz] | Waveform | Modulation | Inner 1RB | Inner Full |
| Middle | 50 | DFT-S | BPSK | 28.20 | 28.20 |
| | 50 | DFT-S | QPSK | 28.37 | 28.10 |
| | 50 | DFT-S | 16QAM | 26.12 | 25.97 |
| | 50 | DFT-S | 64QAM | 24.92 | 23.88 |
| | 100 | DFT-S | BPSK | 28.72 | 28.69 |
| | 100 | DFT-S | QPSK | 29.14 | 28.75 |
| | 100 | DFT-S | 16QAM | 26.83 | 26.73 |
| | 100 | DFT-S | 64QAM | 25.51 | 24.48 |
| | 200 | DFT-S | BPSK | 21.83 | 24.87 |
| | 200 | DFT-S | QPSK | 21.67 | 24.81 |
| | 200 | DFT-S | 16QAM | 22.42 | 24.43 |
| | 200 | DFT-S | 64QAM | 22.41 | 22.17 |

Note : The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



| NR Band n261 Module 1 AG0 (Beam ID: 18) | | | | | |
|---|----------|----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | |
| | BW [MHz] | Waveform | Modulation | Inner 1RB | Inner Full |
| Highest | 50 | DFT-S | BPSK | 28.84 | 28.77 |
| | 50 | DFT-S | QPSK | 28.95 | 28.75 |
| | 50 | DFT-S | 16QAM | 26.59 | 26.49 |
| | 50 | DFT-S | 64QAM | 25.39 | 24.33 |
| | 100 | DFT-S | BPSK | 29.28 | 29.29 |
| | 100 | DFT-S | QPSK | 29.32 | 29.22 |
| | 100 | DFT-S | 16QAM | 27.36 | 27.36 |
| | 100 | DFT-S | 64QAM | 26.05 | 25.23 |
| | 200 | DFT-S | BPSK | 22.00 | 25.18 |
| | 200 | DFT-S | QPSK | 22.12 | 25.19 |
| | 200 | DFT-S | 16QAM | 22.02 | 24.61 |
| | 200 | DFT-S | 64QAM | 22.21 | 22.50 |

Note : The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



| NR Band n261 Module 1 AG1 (Beam ID:146) | | | | | |
|--|----------|----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | |
| | BW [MHz] | Waveform | Modulation | Inner 1RB | Inner Full |
| Lowest | 50 | DFT-S | BPSK | 25.41 | 25.37 |
| | 50 | DFT-S | QPSK | 25.34 | 25.45 |
| | 50 | DFT-S | 16QAM | 22.97 | 23.11 |
| | 50 | DFT-S | 64QAM | 21.07 | 20.66 |
| | 100 | DFT-S | BPSK | 25.01 | 24.89 |
| | 100 | DFT-S | QPSK | 24.94 | 24.86 |
| | 100 | DFT-S | 16QAM | 22.52 | 22.82 |
| | 100 | DFT-S | 64QAM | 20.72 | 20.55 |
| | 200 | DFT-S | BPSK | 17.14 | 20.70 |
| | 200 | DFT-S | QPSK | 17.21 | 20.69 |
| | 200 | DFT-S | 16QAM | 16.95 | 20.62 |
| | 200 | DFT-S | 64QAM | 16.89 | 17.82 |

Note : The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



| NR Band n261 Module 1 AG1 (Beam ID:146) | | | | | |
|---|----------|----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | |
| | BW [MHz] | Waveform | Modulation | Inner 1RB | Inner Full |
| Middle | 50 | DFT-S | BPSK | 24.15 | 23.95 |
| | 50 | DFT-S | QPSK | 23.58 | 23.91 |
| | 50 | DFT-S | 16QAM | 22.53 | 21.90 |
| | 50 | DFT-S | 64QAM | 19.99 | 19.39 |
| | 100 | DFT-S | BPSK | 24.67 | 24.68 |
| | 100 | DFT-S | QPSK | 24.35 | 24.82 |
| | 100 | DFT-S | 16QAM | 23.12 | 22.60 |
| | 100 | DFT-S | 64QAM | 20.60 | 20.35 |
| | 200 | DFT-S | BPSK | 17.73 | 20.51 |
| | 200 | DFT-S | QPSK | 16.93 | 20.61 |
| | 200 | DFT-S | 16QAM | 17.65 | 20.08 |
| | 200 | DFT-S | 64QAM | 17.85 | 17.92 |

Note : The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



| NR Band n261 Module 1 AG1 (Beam ID:146) | | | | | |
|---|----------|----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | |
| | BW [MHz] | Waveform | Modulation | Inner 1RB | Inner Full |
| Highest | 50 | DFT-S | BPSK | 23.38 | 23.26 |
| | 50 | DFT-S | QPSK | 23.53 | 23.24 |
| | 50 | DFT-S | 16QAM | 21.36 | 20.84 |
| | 50 | DFT-S | 64QAM | 20.16 | 18.80 |
| | 100 | DFT-S | BPSK | 23.67 | 23.94 |
| | 100 | DFT-S | QPSK | 24.03 | 23.73 |
| | 100 | DFT-S | 16QAM | 21.72 | 21.85 |
| | 100 | DFT-S | 64QAM | 20.52 | 19.67 |
| | 200 | DFT-S | BPSK | 17.44 | 20.64 |
| | 200 | DFT-S | QPSK | 17.90 | 20.71 |
| | 200 | DFT-S | 16QAM | 18.53 | 20.10 |
| | 200 | DFT-S | 64QAM | 18.13 | 18.00 |

Note : The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



| NR Band n261 Module 0 AG0+1 (Beam ID:18+146) | | | | | |
|--|----------|----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | |
| | BW [MHz] | Waveform | Modulation | Inner 1RB | Inner Full |
| Lowest | 50 | DFT-S | BPSK | 29.43 | 29.88 |
| | 50 | DFT-S | QPSK | 29.50 | 29.91 |
| | 50 | DFT-S | 16QAM | 26.52 | 27.52 |
| | 50 | DFT-S | 64QAM | 24.82 | 25.32 |
| | 100 | DFT-S | BPSK | 28.87 | 29.63 |
| | 100 | DFT-S | QPSK | 29.36 | 29.97 |
| | 100 | DFT-S | 16QAM | 26.18 | 27.64 |
| | 100 | DFT-S | 64QAM | 24.69 | 25.49 |
| | 100 | CP | QPSK | 26.03 | 26.37 |
| | 100 | CP | 16QAM | 23.93 | 24.91 |
| | 100 | CP | 64QAM | 22.35 | 22.86 |
| | 200 | DFT-S | BPSK | 22.43 | 25.63 |
| | 200 | DFT-S | QPSK | 22.16 | 25.67 |
| | 200 | DFT-S | 16QAM | 21.12 | 24.57 |
| | 200 | DFT-S | 64QAM | 21.64 | 22.37 |

Note : The 200MHz Bw is carrier aggregation by 2CC of 100MHz.




| NR Band n261 Module 0 AG0+1 (Beam ID:18+146) | | | | | |
|--|----------|----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | |
| | BW [MHz] | Waveform | Modulation | Inner 1RB | Inner Full |
| Middle | 50 | DFT-S | BPSK | 29.26 | 29.21 |
| | 50 | DFT-S | QPSK | 29.28 | 29.13 |
| | 50 | DFT-S | 16QAM | 26.95 | 26.89 |
| | 50 | DFT-S | 64QAM | 24.58 | 24.76 |
| | 100 | DFT-S | BPSK | 29.65 | 29.57 |
| | 100 | DFT-S | QPSK | 29.66 | 29.60 |
| | 100 | DFT-S | 16QAM | 27.37 | 27.46 |
| | 100 | DFT-S | 64QAM | 24.96 | 25.37 |
| | 200 | DFT-S | BPSK | 22.19 | 25.28 |
| | 200 | DFT-S | QPSK | 22.07 | 25.25 |
| | 200 | DFT-S | 16QAM | 22.36 | 24.39 |
| | 200 | DFT-S | 64QAM | 22.79 | 22.51 |

Note : The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



| NR Band n261 Module 0 AG0+1 (Beam ID: 18+146) | | | | | |
|---|----------|----------|------------|-----------|------------|
| Maximum Average EIRP [dBm] | | | | | |
| | BW [MHz] | Waveform | Modulation | Inner 1RB | Inner Full |
| Highest | 50 | DFT-S | BPSK | 28.67 | 29.32 |
| | 50 | DFT-S | QPSK | 28.37 | 29.26 |
| | 50 | DFT-S | 16QAM | 26.06 | 27.17 |
| | 50 | DFT-S | 64QAM | 24.38 | 24.97 |
| | 100 | DFT-S | BPSK | 29.26 | 29.06 |
| | 100 | DFT-S | QPSK | 29.30 | 29.03 |
| | 100 | DFT-S | 16QAM | 27.07 | 27.03 |
| | 100 | DFT-S | 64QAM | 25.23 | 24.96 |
| | 200 | DFT-S | BPSK | 22.65 | 24.52 |
| | 200 | DFT-S | QPSK | 22.55 | 24.56 |
| | 200 | DFT-S | 16QAM | 21.92 | 23.89 |
| | 200 | DFT-S | 64QAM | 22.30 | 21.88 |

Note : The 200MHz Bw is carrier aggregation by 2CC of 100MHz.

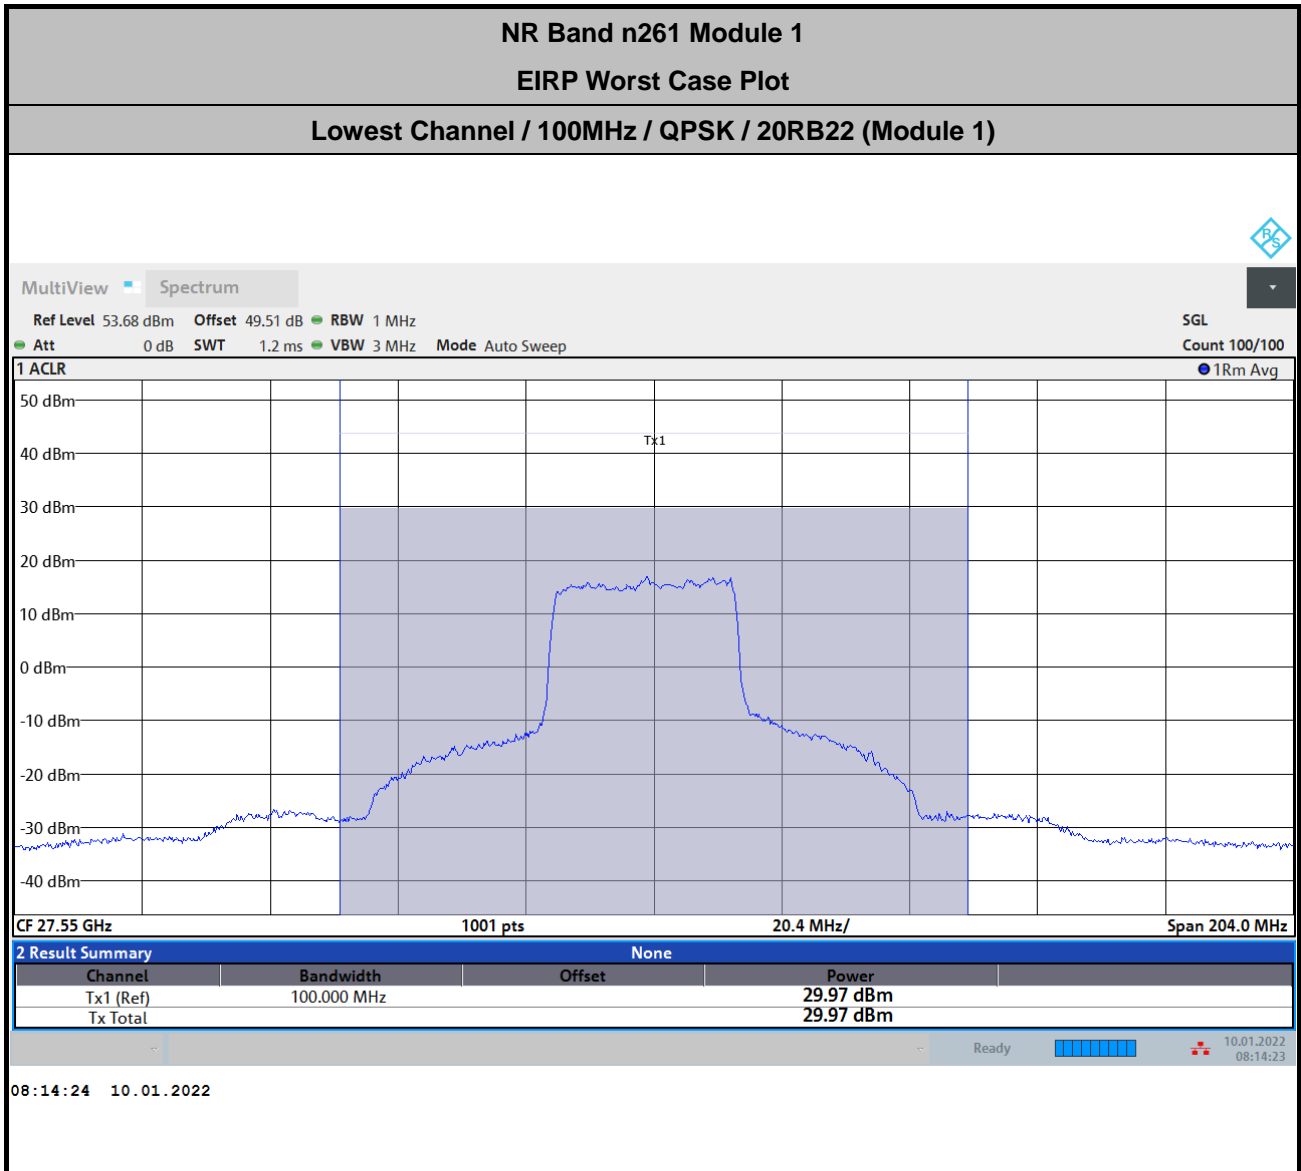

$$\text{Offset} = \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8$$

$$= 39.6 + 7.71 + 107 + 20\log(1) - 104.8 = 49.51 \text{ (dB)}$$



NR Band n260 Module 0

AG0

Occupied Bandwidth

| Mode | DFT-s-OFDM Module 0 NR Band n260 : 99%OBW(MHz) | | | | | | | | | | | |
|------------|--|-------|-------|-------|--------|-------|-------|-------|--------|--------|--------|--------|
| BW | 50MHz | | | | 100MHz | | | | 200MHz | | | |
| Mod. | BPSK | QPSK | 16QAM | 64QAM | BPSK | QPSK | 16QAM | 64QAM | BPSK | QPSK | 16QAM | 64QAM |
| Lowest CH | 46.06 | 46.12 | 46.13 | 46.00 | 91.17 | 91.38 | 91.38 | 91.05 | 188.71 | 188.68 | 188.82 | 189.19 |
| Middle CH | 45.78 | 45.87 | 45.97 | 45.87 | 91.16 | 91.35 | 91.46 | 91.25 | 190.18 | 189.78 | 191.84 | 188.34 |
| Highest CH | 45.88 | 45.99 | 45.99 | 45.91 | 91.30 | 91.38 | 91.61 | 91.41 | 187.92 | 187.18 | 188.39 | 188.86 |


| Mode | CP-OFDM Module 0 NR Band n260 : 99%OBW(MHz) | | | | | | | | |
|------------|---|-------|-------|--------|-------|-------|--------|--------|--------|
| BW | 50MHz | | | 100MHz | | | 200MHz | | |
| Mod. | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| Lowest CH | 46.07 | 45.99 | 45.89 | 94.37 | 94.08 | 93.95 | 191.82 | 192.03 | 191.32 |
| Middle CH | 45.98 | 45.91 | 45.86 | 94.44 | 94.19 | 94.15 | 191.08 | 191.39 | 193.86 |
| Highest CH | 46.03 | 45.94 | 45.99 | 94.41 | 94.18 | 94.21 | 191.28 | 191.38 | 191.97 |




DFT-s-OFDM Module 0

NR Band n260


Lowest Channel / 50MHz / BPSK

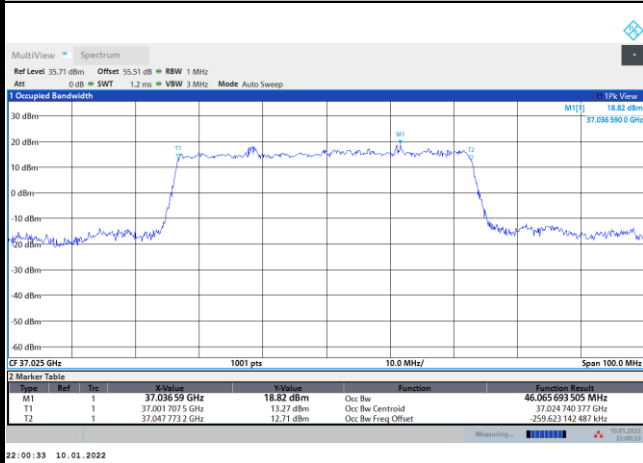


Lowest Channel / 50MHz / QPSK

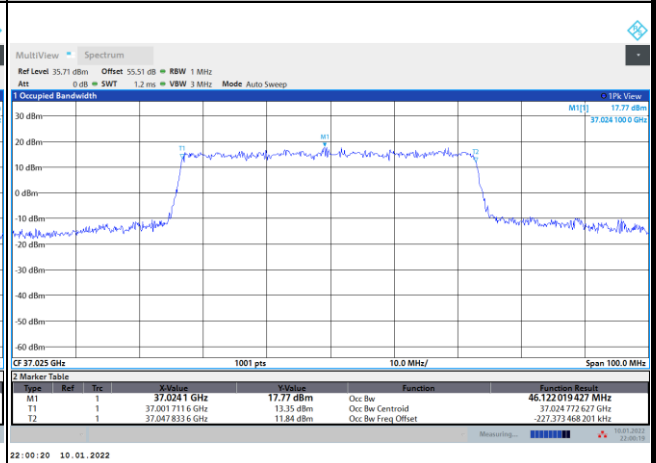


Middle Channel / 50MHz / BPSK

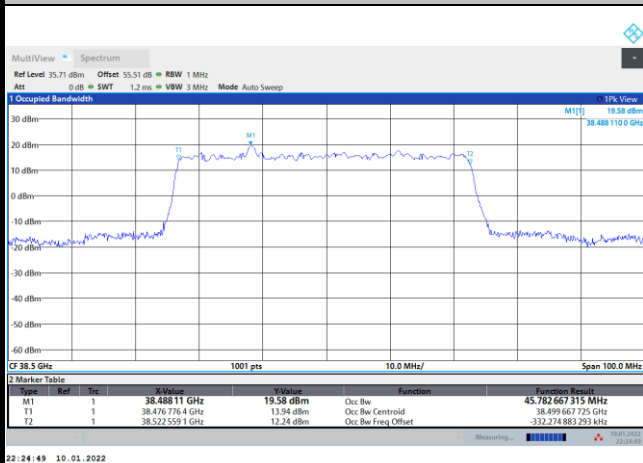


Middle Channel / 50MHz / QPSK

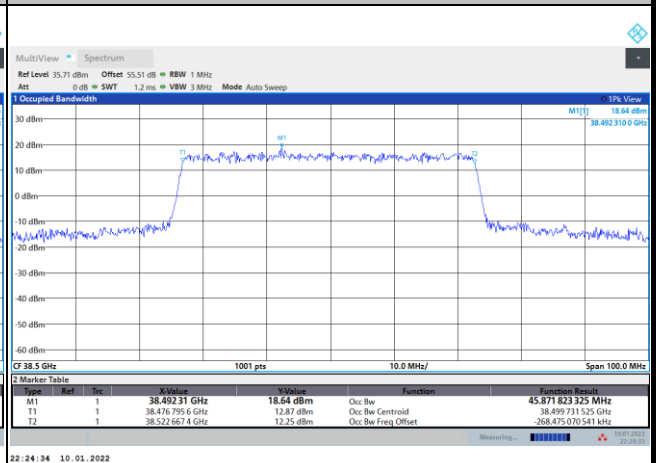

Highest Channel / 50MHz / BPSK

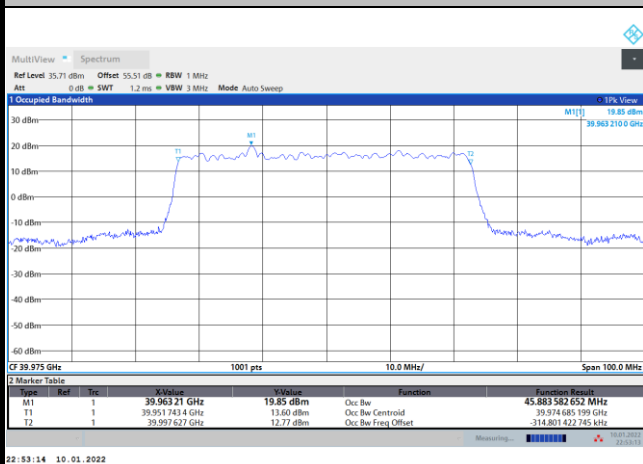

Highest Channel / 50MHz / QPSK

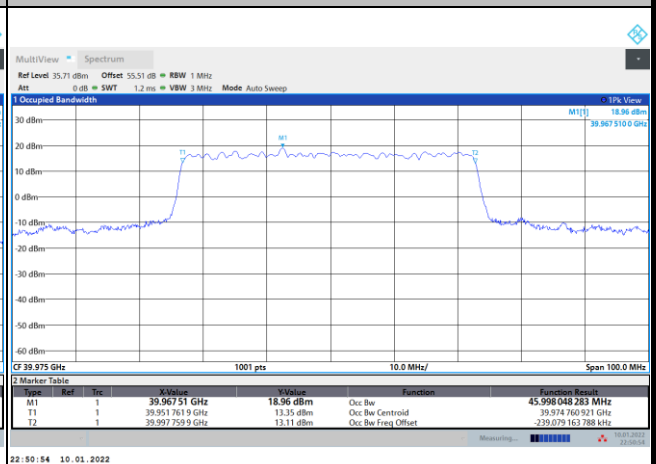





DFT-s-OFDM Module 0

NR Band n260


Lowest Channel / 50MHz / 16QAM

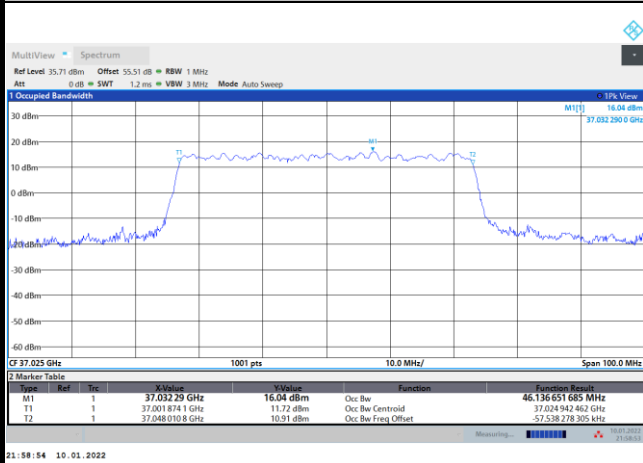


Lowest Channel / 50MHz / 64QAM

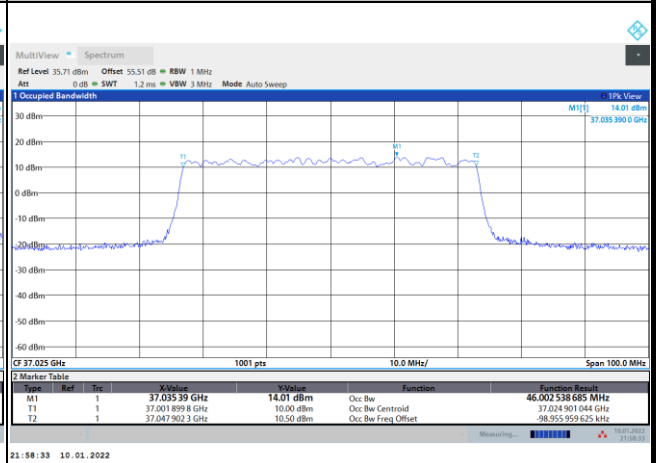


Middle Channel / 50MHz / 16QAM

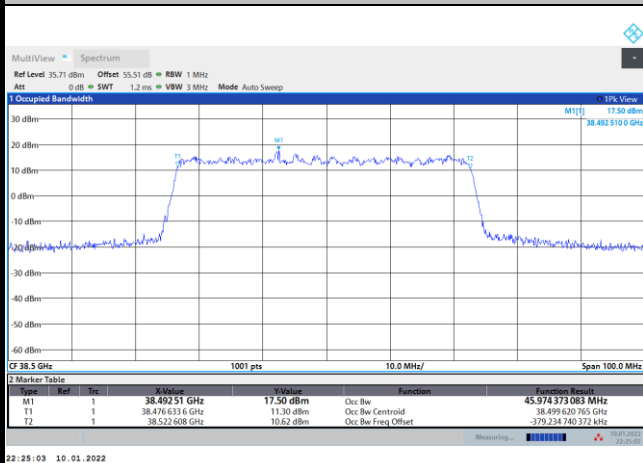


Middle Channel / 50MHz / 64QAM

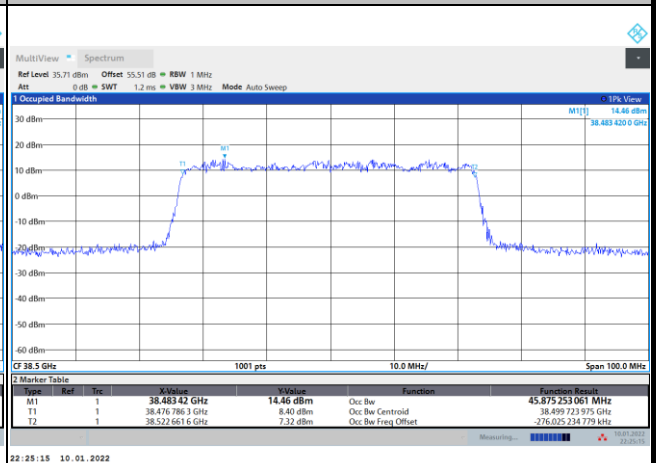

Highest Channel / 50MHz / 16QAM

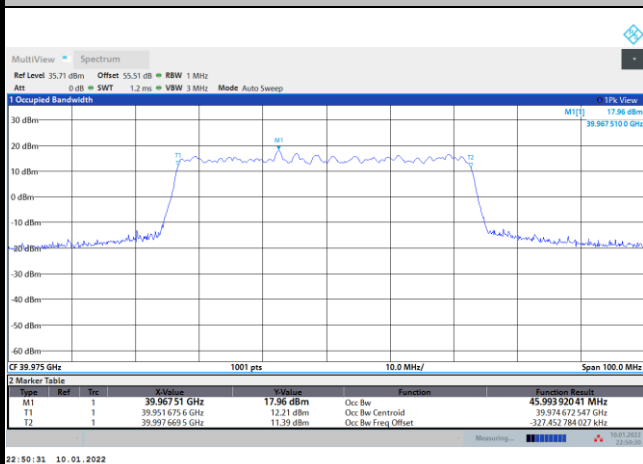

Highest Channel / 50MHz / 64QAM

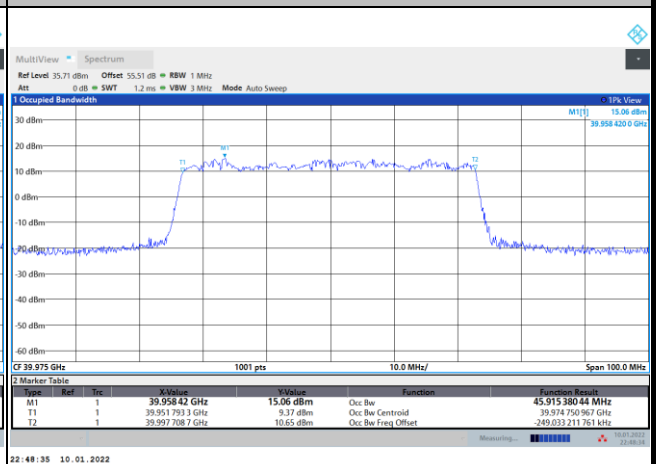





DFT-s-OFDM Module 0

NR Band n260


Lowest Channel / 100MHz / BPSK

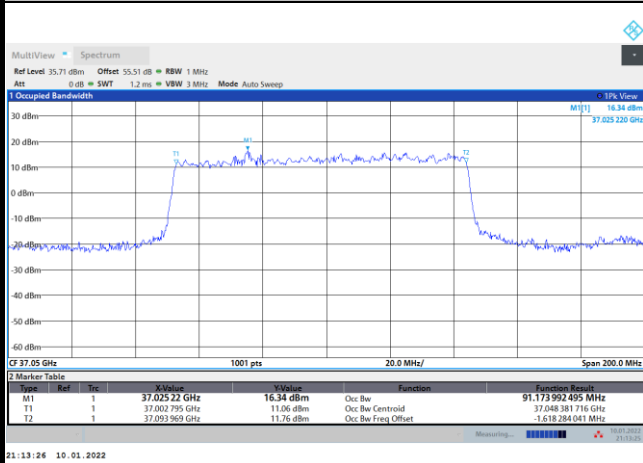


Lowest Channel / 100MHz / QPSK

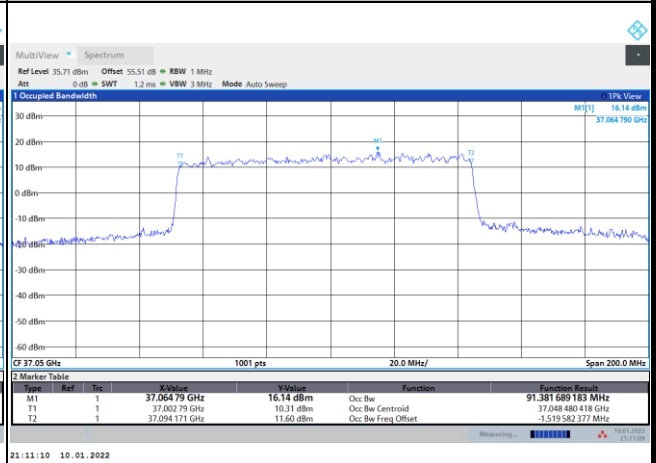


Middle Channel / 100MHz / BPSK

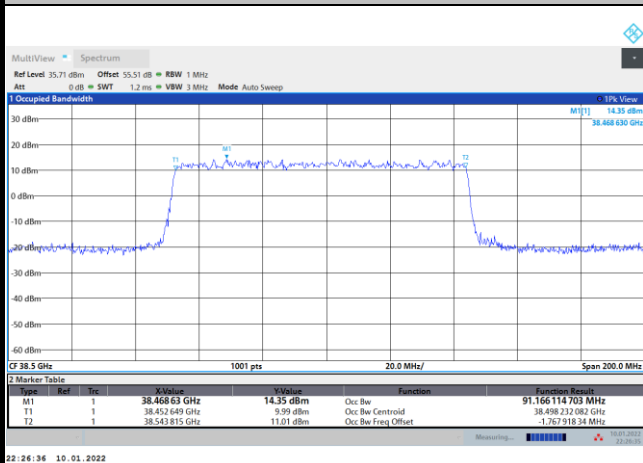


Middle Channel / 100MHz / QPSK

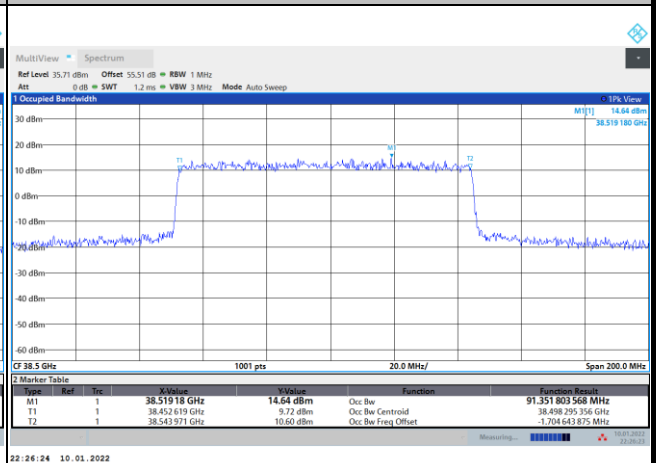

Highest Channel / 100MHz / BPSK

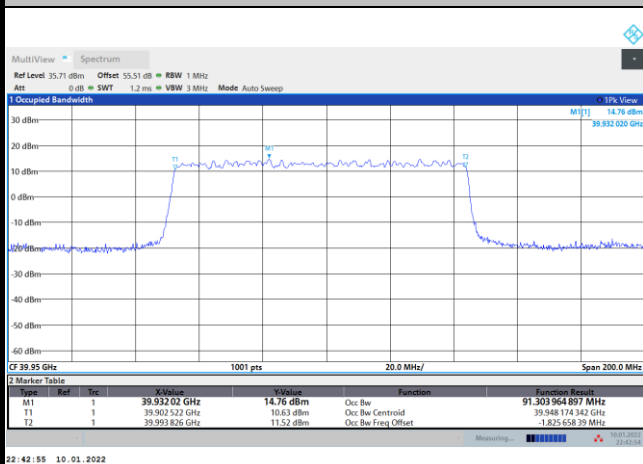

Highest Channel / 100MHz / QPSK

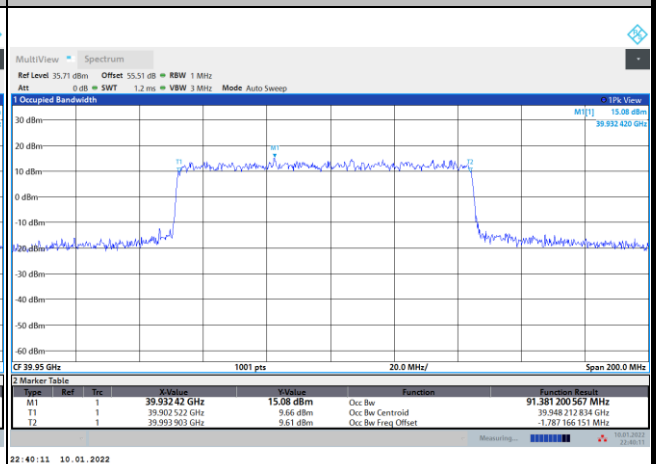





DFT-s-OFDM Module 0

NR Band n260


Lowest Channel / 100MHz / 16QAM

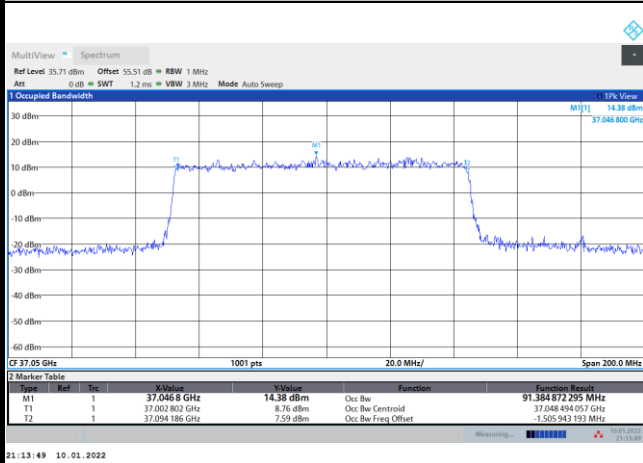


Lowest Channel / 100MHz / 64QAM

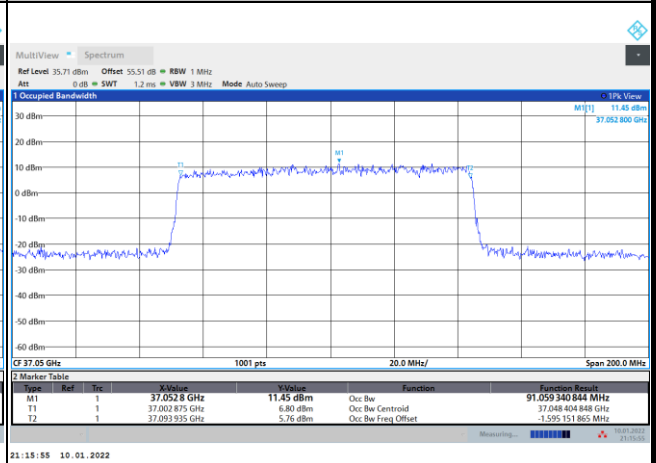


Middle Channel / 100MHz / 16QAM

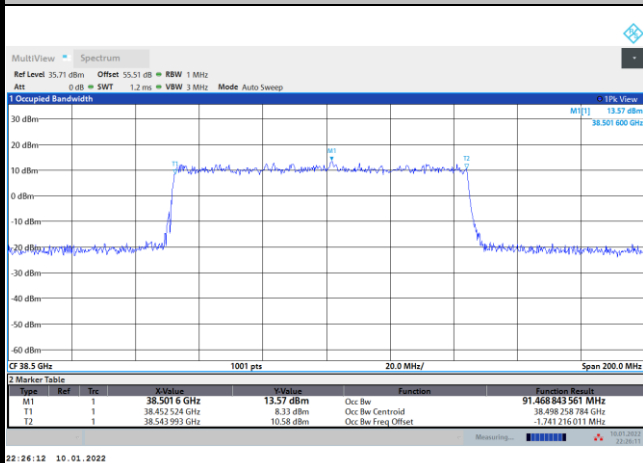


Middle Channel / 100MHz / 64QAM

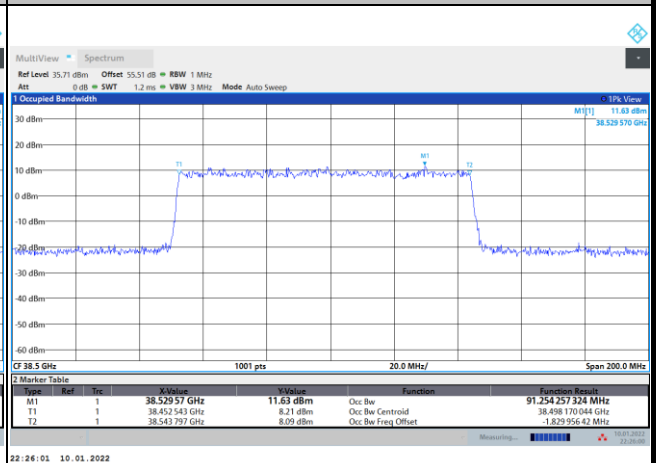

Highest Channel / 100MHz / 16QAM

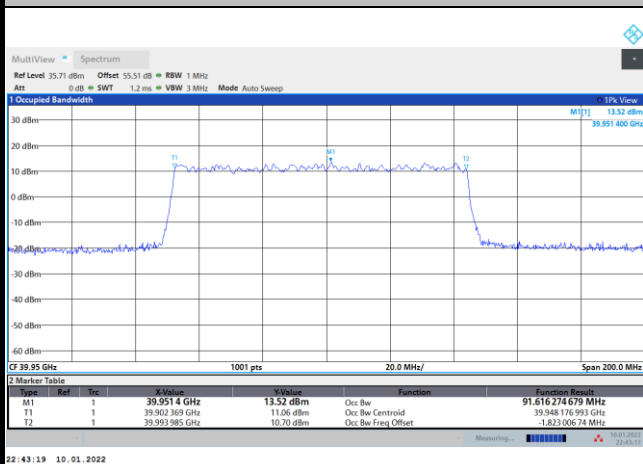

Highest Channel / 100MHz / 64QAM

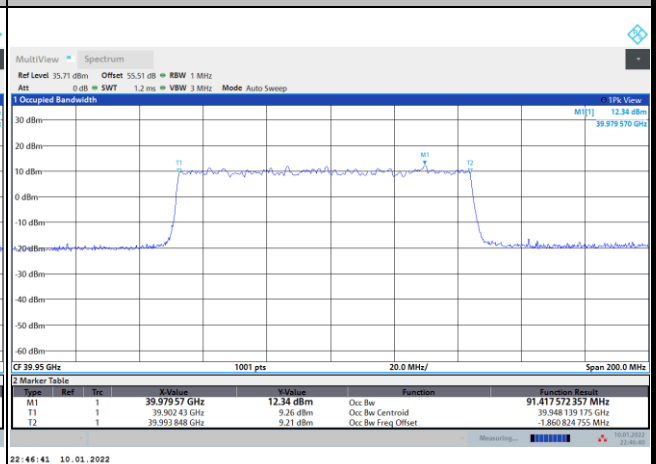





DFT-s-OFDM Module 0

NR Band n260


Lowest Channel / 200MHz / BPSK

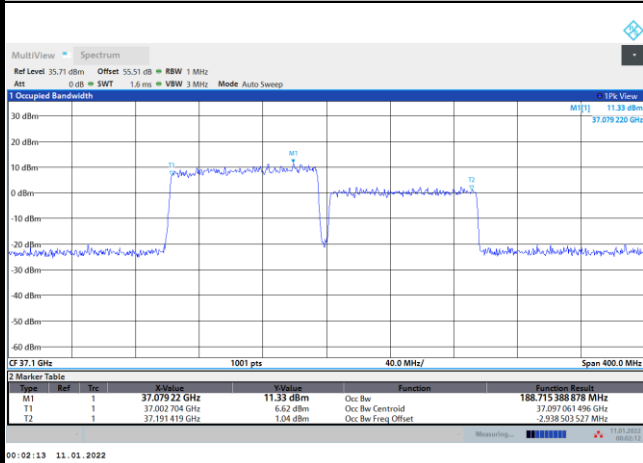


Lowest Channel / 200MHz / QPSK

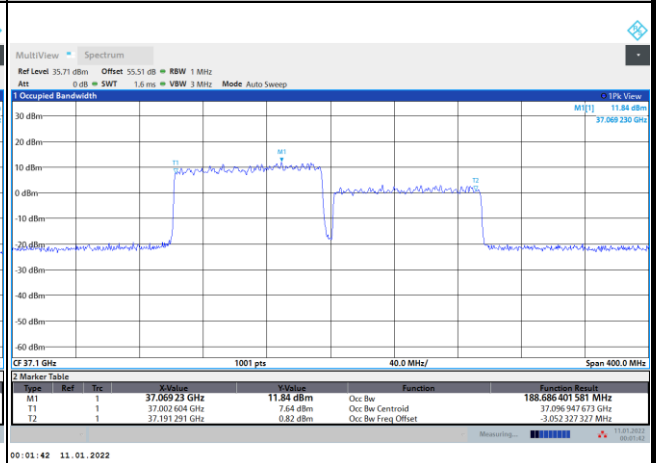


Middle Channel / 200MHz / BPSK

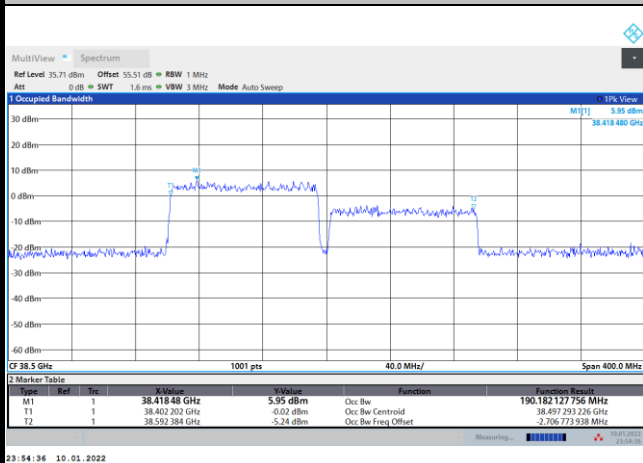


Middle Channel / 200MHz / QPSK

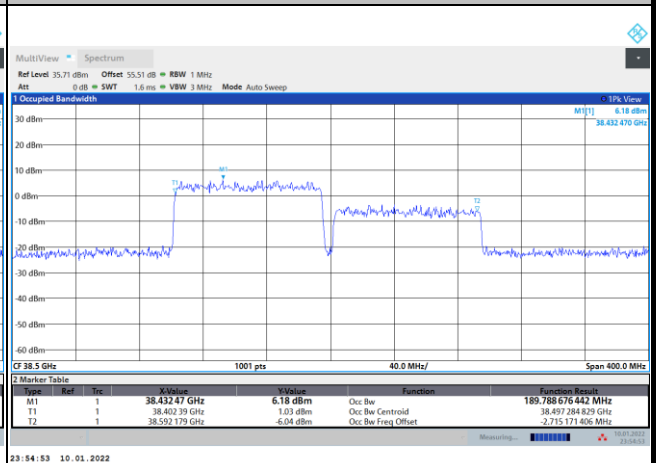

Highest Channel / 200MHz / BPSK

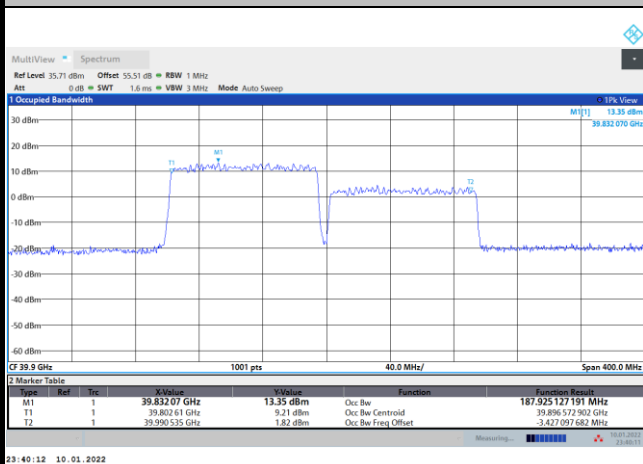

Highest Channel / 200MHz / QPSK

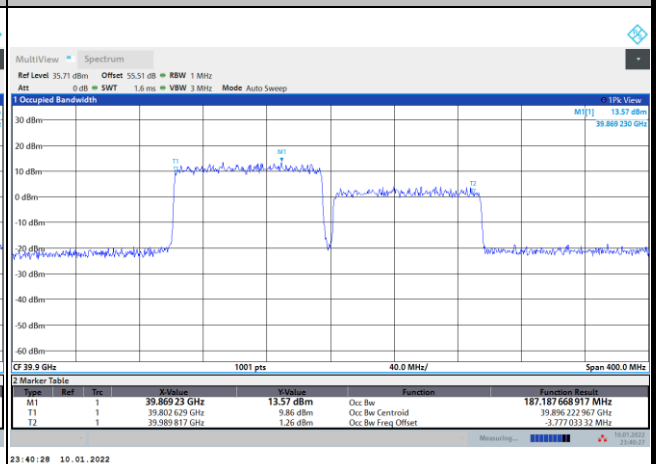





DFT-s-OFDM Module 0

NR Band n260


Lowest Channel / 200MHz / 16QAM

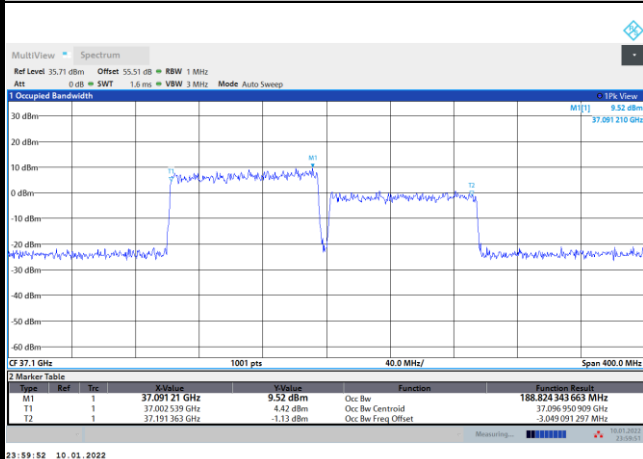


Lowest Channel / 200MHz / 64QAM

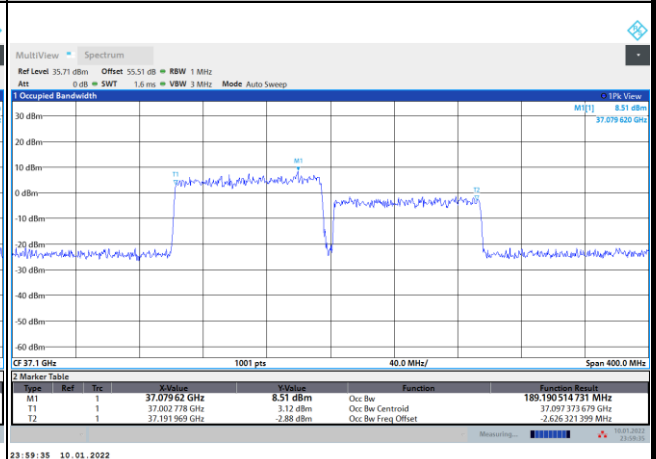


Middle Channel / 200MHz / 16QAM

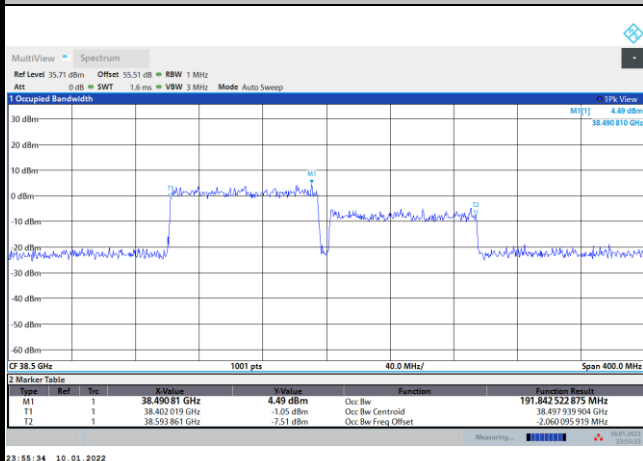


Middle Channel / 200MHz / 64QAM

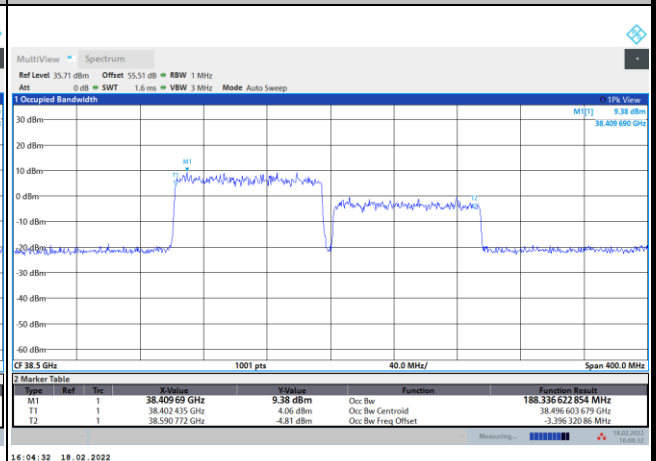

Highest Channel / 200MHz / 16QAM

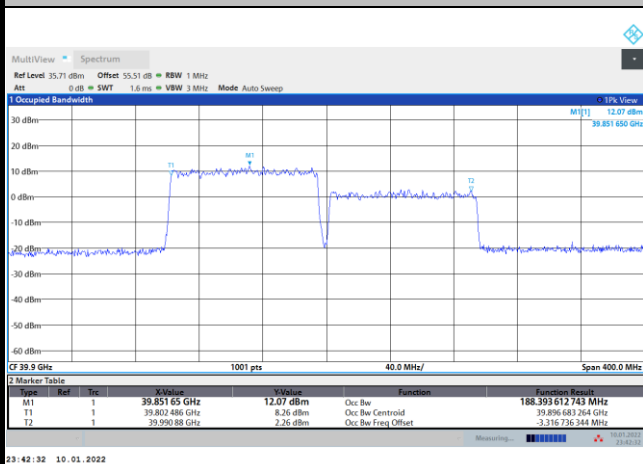

Highest Channel / 200MHz / 64QAM

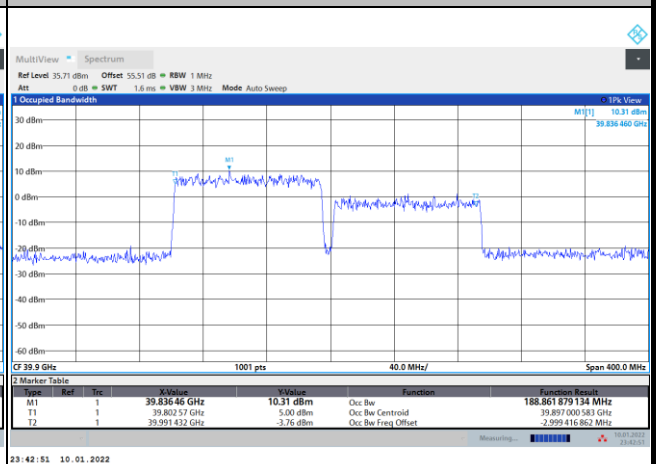





CP-OFDM Module 0

NR Band n260


Lowest Channel / 50MHz / QPSK

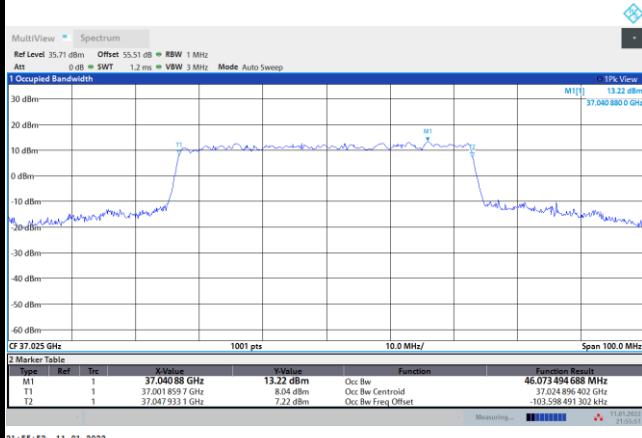


Lowest Channel / 50MHz / 16QAM

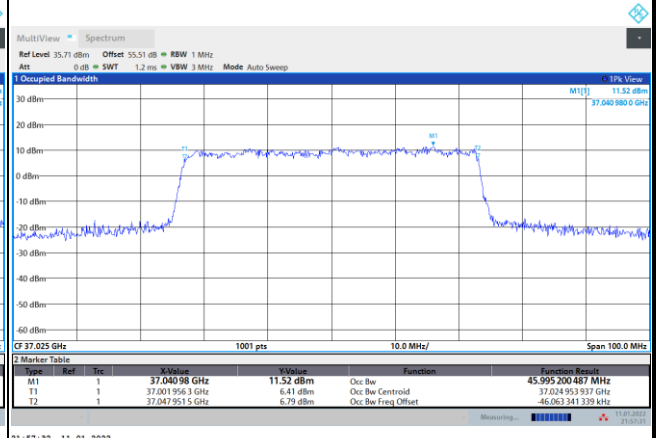


Middle Channel / 50MHz / QPSK

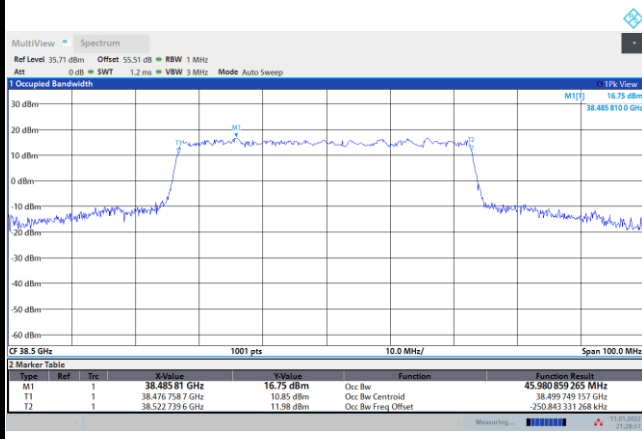


Middle Channel / 50MHz / 16QAM

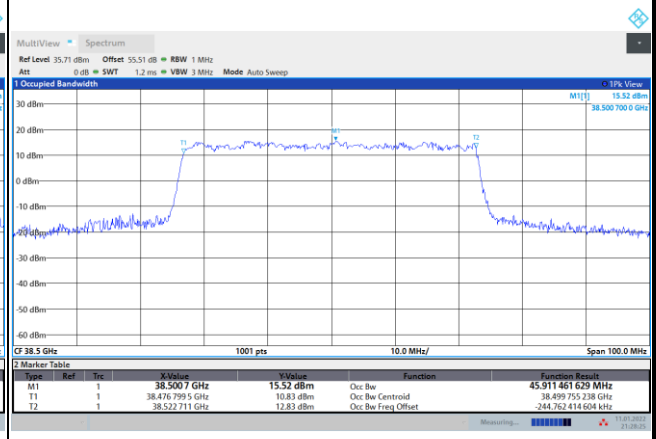

Highest Channel / 50MHz / QPSK

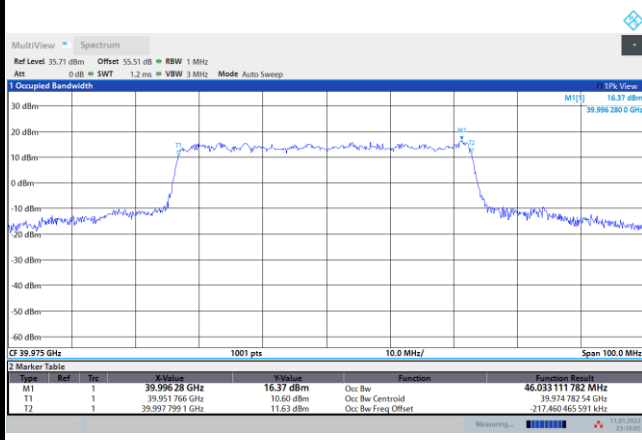

Highest Channel / 50MHz / 16QAM

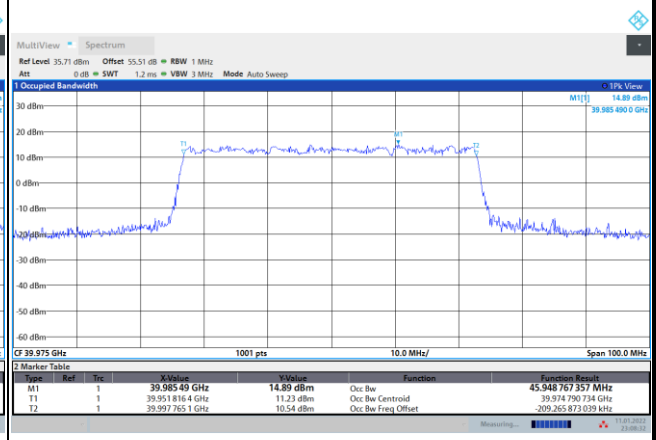





CP-OFDM Module 0

NR Band n260


Lowest Channel / 50MHz / 64QAM

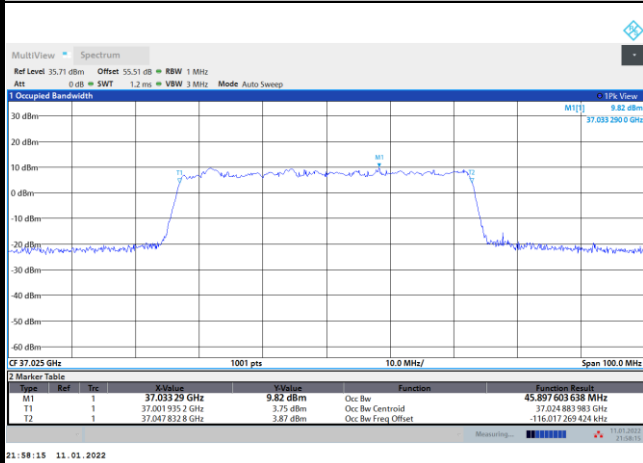


Lowest Channel / 100MHz / QPSK

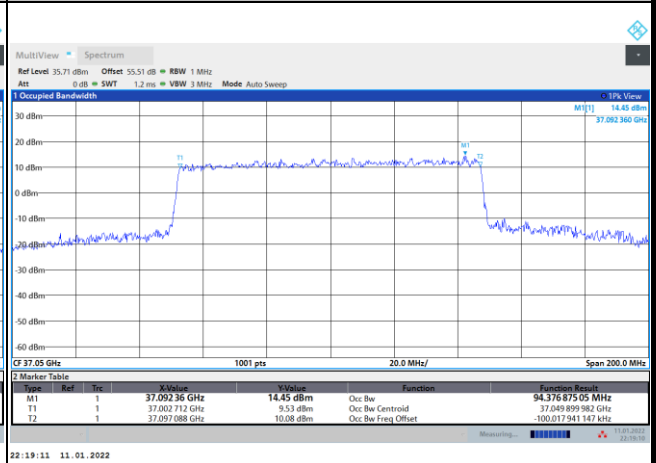


Middle Channel / 50MHz / 64QAM

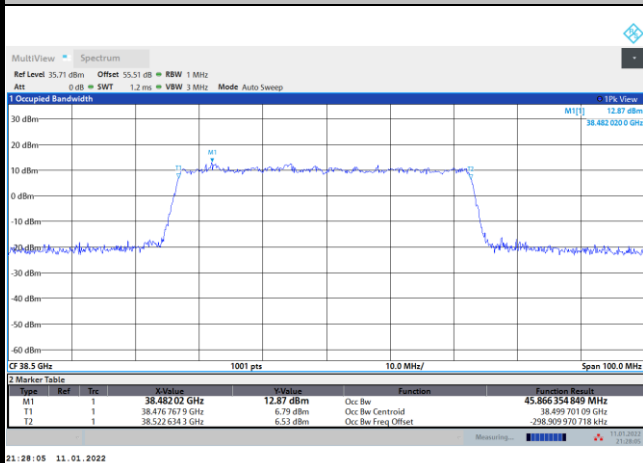


Middle Channel / 100MHz / QPSK

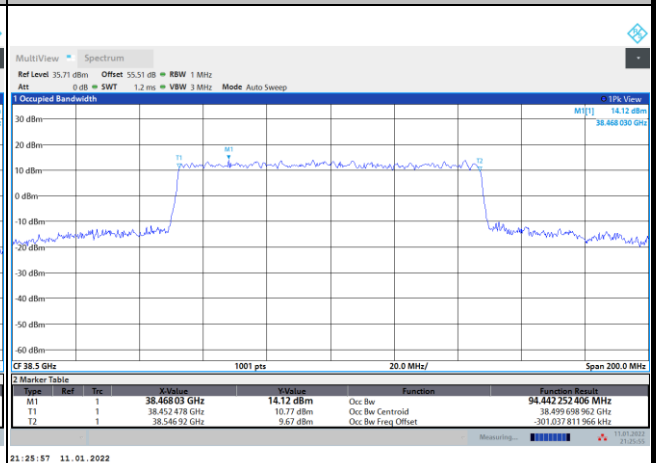

Highest Channel / 50MHz / 64QAM

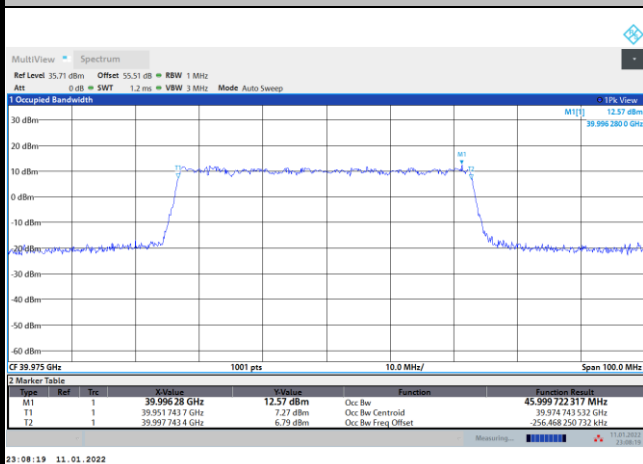

Highest Channel / 100MHz / QPSK

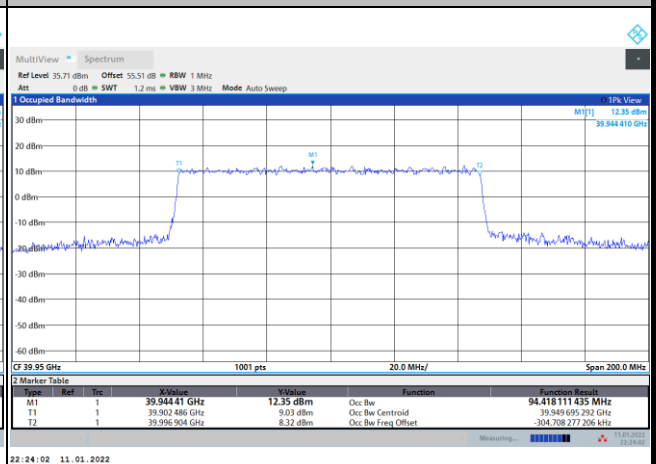





CP-OFDM Module 0

NR Band n260


Lowest Channel / 100MHz / 16QAM

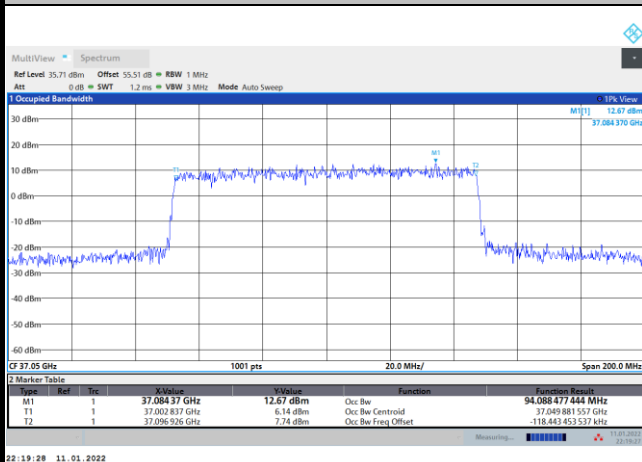


Lowest Channel / 100MHz / 64QAM

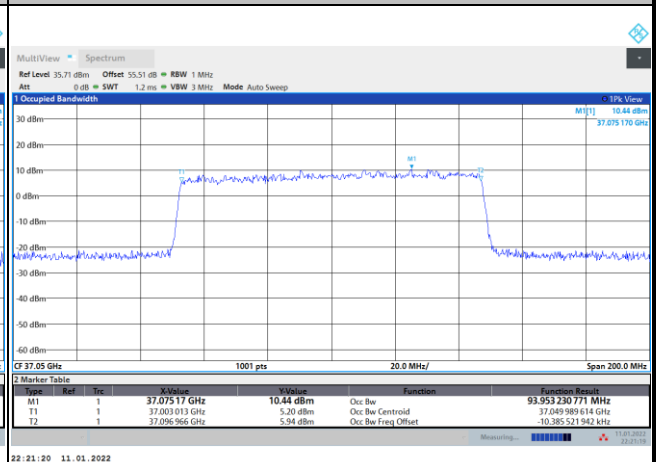


Middle Channel / 100MHz / 16QAM

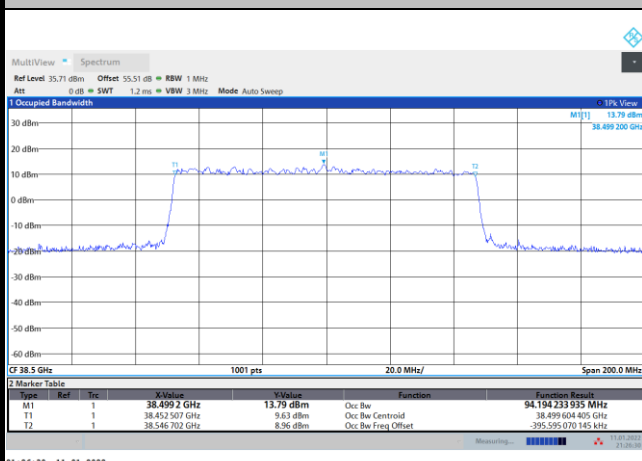


Middle Channel / 100MHz / 64QAM

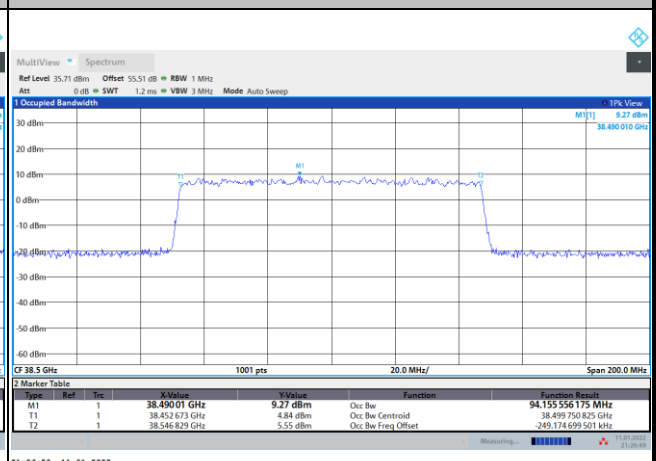

Highest Channel / 100MHz / 16QAM

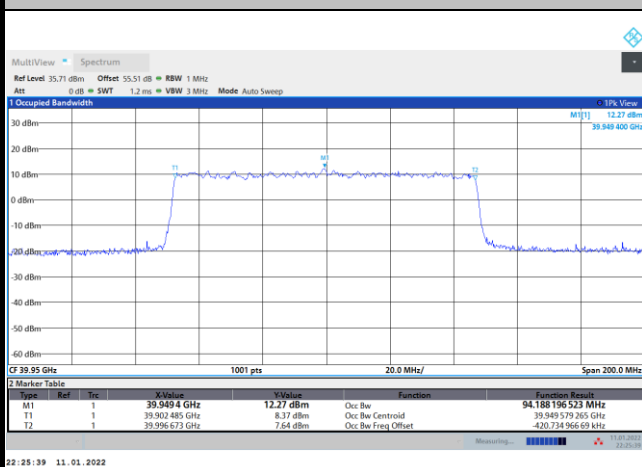

Highest Channel / 100MHz / 64QAM

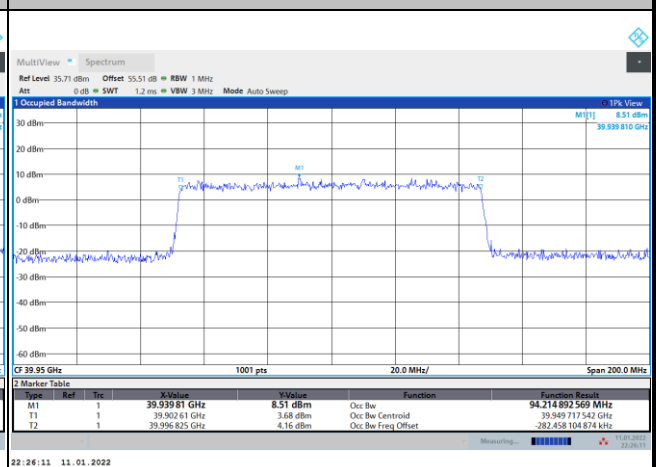




CP-OFDM Module 0

NR Band n260


Lowest Channel / 200MHz / QPSK




Lowest Channel / 200MHz / 16QAM

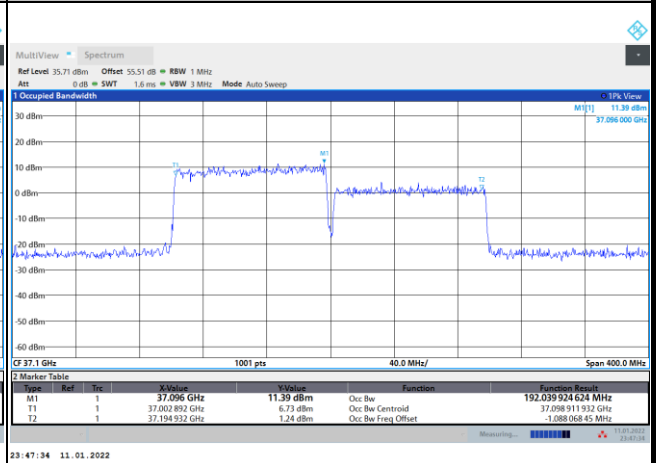


Middle Channel / 200MHz / QPSK

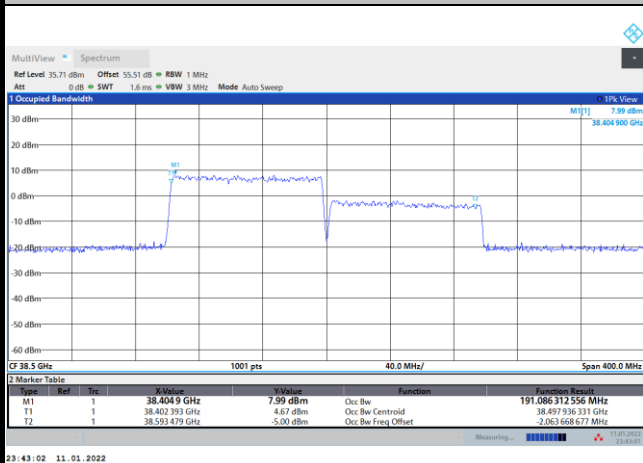


Middle Channel / 200MHz / 16QAM

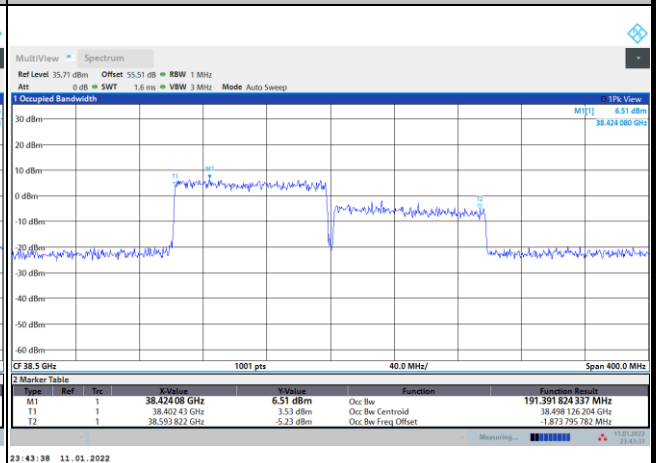

Highest Channel / 200MHz / QPSK

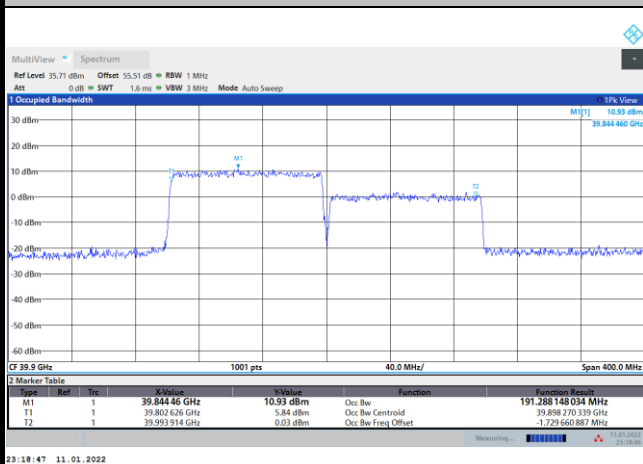

Highest Channel / 200MHz / 16QAM

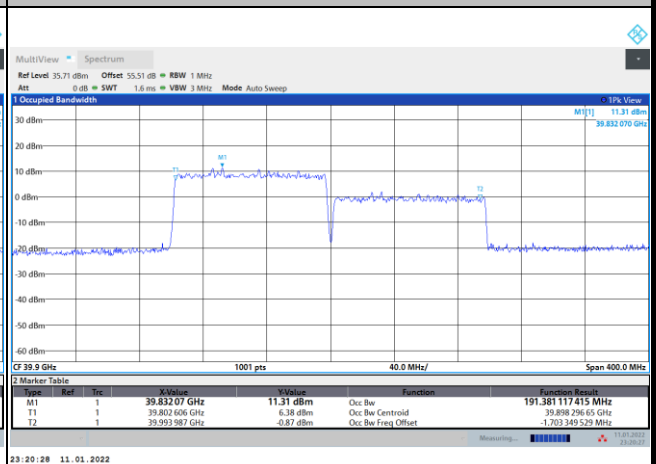




CP-OFDM Module 0


NR Band n260

Lowest Channel / 200MHz / 64QAM

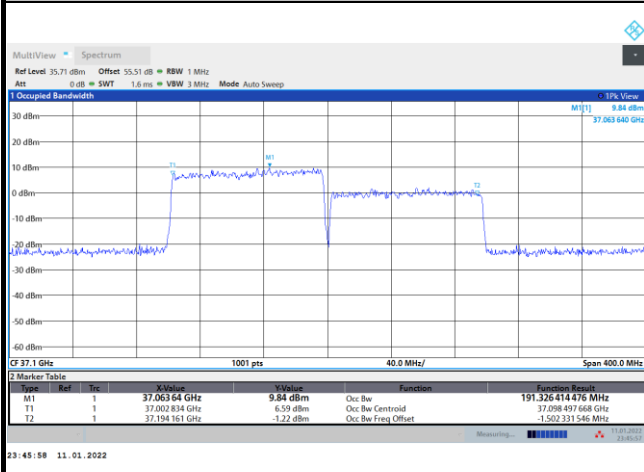


intentionally blank

Middle Channel / 200MHz / 64QAM

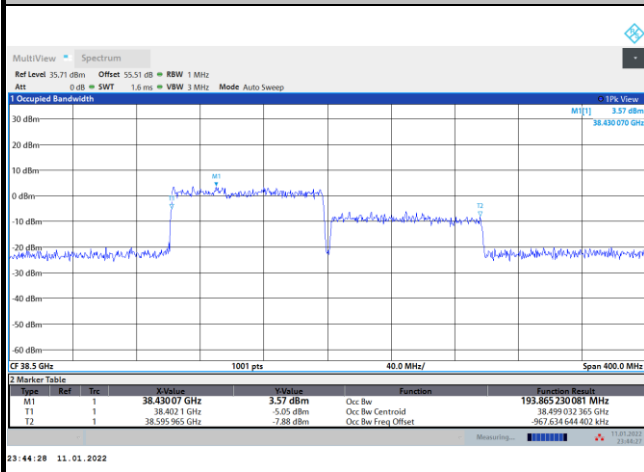

intentionally blank

Highest Channel / 200MHz / 64QAM

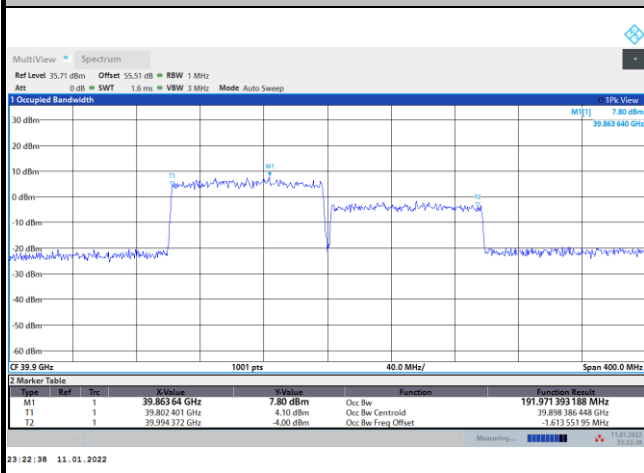

intentionally blank



Radiated Out of Band Emissions

| Mode | | | DFT-s-OFDM Module 0 NR Band n260 : BE (dBm) 1 RB | | | | | | | | | | | |
|-------------|---------|------|--|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| BW | | | 50MHz | | | | 100MHz | | | | 200MHz | | | |
| Limit (dBm) | | | BPSK | QPSK | 16QAM | 64QAM | BPSK | QPSK | 16QAM | 64QAM | BPSK | QPSK | 16QAM | 64QAM |
| Low CH | 0~10%OB | ≦-5 | -8.11 | -8.58 | -8.61 | -10.78 | -8.56 | -8.16 | -10.1 | -11.9 | -16.71 | -15.9 | -15.12 | -16.74 |
| | >10%OB | ≦-13 | -22.52 | -24.19 | -24.44 | -25.31 | -24.33 | -24.3 | -25.98 | -27.13 | -26.19 | -26.05 | -26.33 | -25.95 |
| High CH | 0~10%OB | ≦-5 | -11.11 | -11.45 | -14.46 | -15.18 | -13.08 | -12.79 | -14.89 | -16.71 | -27.24 | -26.84 | -26.65 | -27.01 |
| | >10%OB | ≦-13 | -18.87 | -19.58 | -20.74 | -22.48 | -23.28 | -24.21 | -24.64 | -25.95 | -27.55 | -27.62 | -27.81 | -27.73 |
| Result | | | Compliance | | | | | | | | | | | |

| Mode | | | CP-OFDM Module 0 NR Band n260 : BE (dBm) 1 RB | | | | | | | | |
|-------------|---------|------|---|--------|--------|--------|--------|--------|--------|--------|--------|
| BW | | | 50MHz | | | 100MHz | | | 200MHz | | |
| Limit (dBm) | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| Low CH | 0~10%OB | ≦-5 | -12.36 | -12.33 | -14.89 | -12.32 | -13.08 | -14.3 | -9.73 | -10.93 | -12.95 |
| | >10%OB | ≦-13 | -26.07 | -26.22 | -27.75 | -27.38 | -27.99 | -28.15 | -19.47 | -17 | -20.13 |
| High CH | 0~10%OB | ≦-5 | -11.7 | -12.58 | -16.03 | -12.89 | -13.97 | -16 | -25.65 | -25.69 | -25.23 |
| | >10%OB | ≦-13 | -19.78 | -20.88 | -23.61 | -24.79 | -25.6 | -25.99 | -27.23 | -25.69 | -22.85 |
| Result | | | Compliance | | | | | | | | |

| Mode | | | DFT-s-OFDM Module 0 NR Band n260 : BE (dBm) Full RB | | | | | | | | | | | |
|-------------|---------|------|---|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| BW | | | 50MHz | | | | 100MHz | | | | 200MHz | | | |
| Limit (dBm) | | | BPSK | QPSK | 16QAM | 64QAM | BPSK | QPSK | 16QAM | 64QAM | BPSK | QPSK | 16QAM | 64QAM |
| Low CH | 0~10%OB | ≦-5 | -18.8 | -16.78 | -21.09 | -24.81 | -22.27 | -21.39 | -24.23 | -26.58 | -25.74 | -28.37 | -28.56 | -29.92 |
| | >10%OB | ≦-13 | -24.66 | -20.4 | -26.6 | -29.53 | -26.96 | -23.02 | -27.74 | -28.13 | -30.49 | -30.49 | -30.55 | -30.69 |
| High CH | 0~10%OB | ≦-5 | -21.87 | -19.12 | -23.69 | -25.19 | -24.66 | -22.52 | -25.53 | -26.6 | -28.62 | -28.06 | -28.59 | -28.89 |
| | >10%OB | ≦-13 | -24.41 | -20.48 | -25.39 | -27.58 | -26 | -23.55 | -26.31 | -26.41 | -27.63 | -27.24 | -27.93 | -27.65 |
| Result | | | Compliance | | | | | | | | | | | |


| Mode | | | CP-OFDM Module 0 NR Band n260 : BE (dBm) Full RB | | | | | | | | |
|-------------|---------|------|--|--------|--------|--------|--------|--------|--------|--------|--------|
| BW | | | 50MHz | | | 100MHz | | | 200MHz | | |
| Limit (dBm) | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| Low CH | 0~10%OB | ≦-5 | -22.09 | -25.26 | -26.29 | -21.02 | -24.83 | -26.62 | -25.28 | -27.35 | -28.83 |
| | >10%OB | ≦-13 | -25.35 | -29.07 | -30.52 | -24.59 | -27.05 | -28.11 | -29.82 | -30.43 | -30.55 |
| High CH | 0~10%OB | ≦-5 | -19.87 | -23.1 | -25.26 | -22.78 | -24.71 | -26.33 | -28.41 | -28.59 | -28.73 |
| | >10%OB | ≦-13 | -22.43 | -26.11 | -27.66 | -24.72 | -26.44 | -26.32 | -27.36 | -27.52 | -27.7 |
| Result | | | Compliance | | | | | | | | |




DFT-s-OFDM Module 0

NR Band n260 / 50MHz / BPSK

Lowest Band Edge / 1 RB

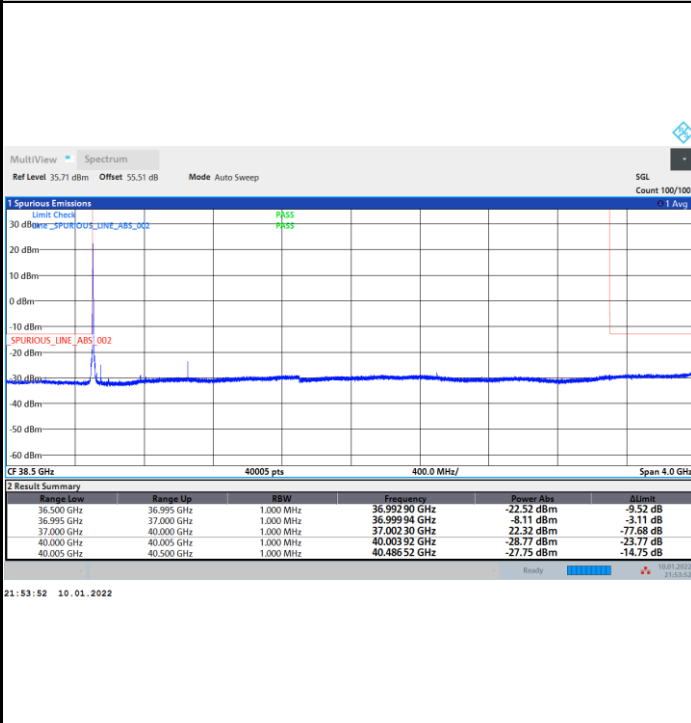


Highest Band Edge / 1 RB

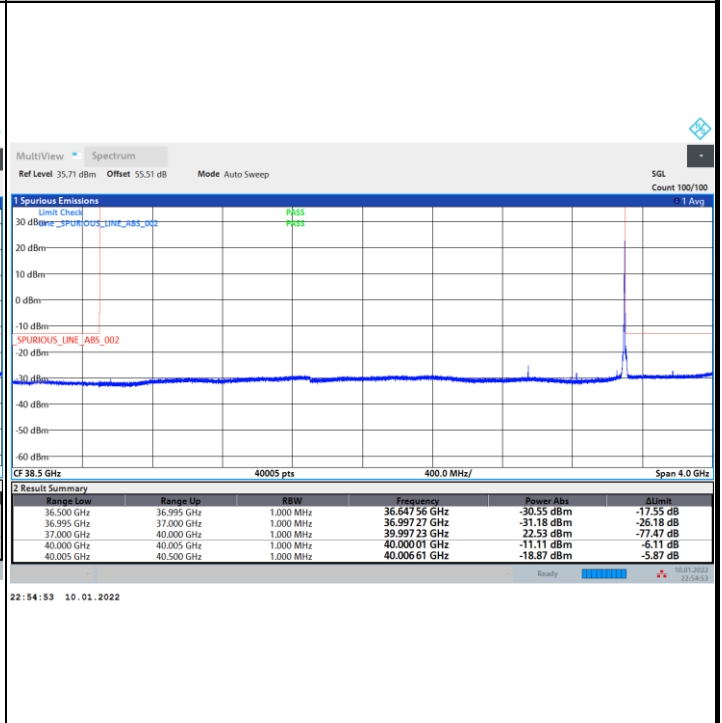


NR Band n260 / 50MHz / QPSK

Lowest Band Edge / 1 RB


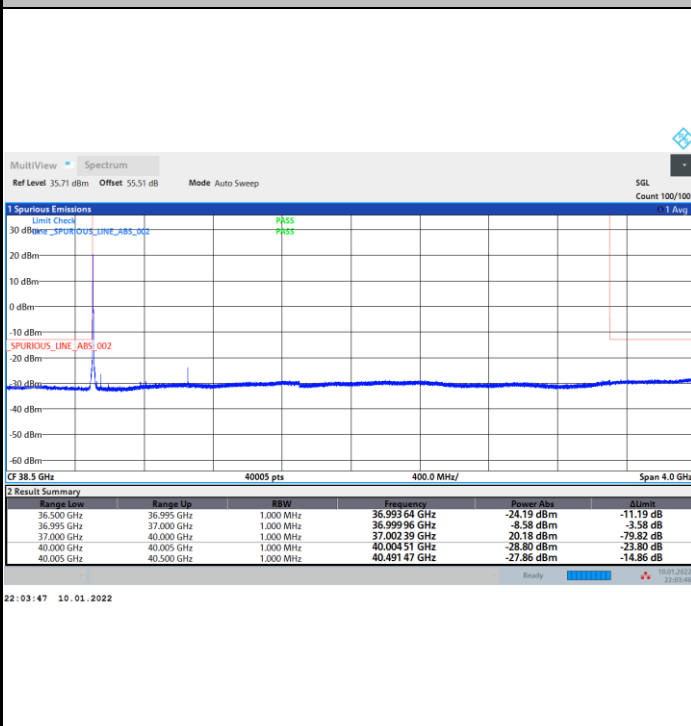


Highest Band Edge / 1 RB

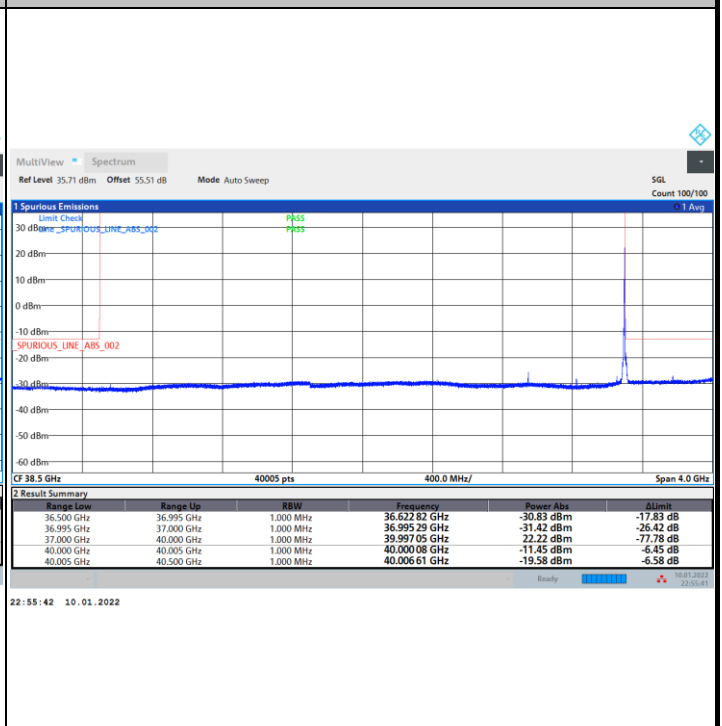



DFT-s-OFDM Module 0

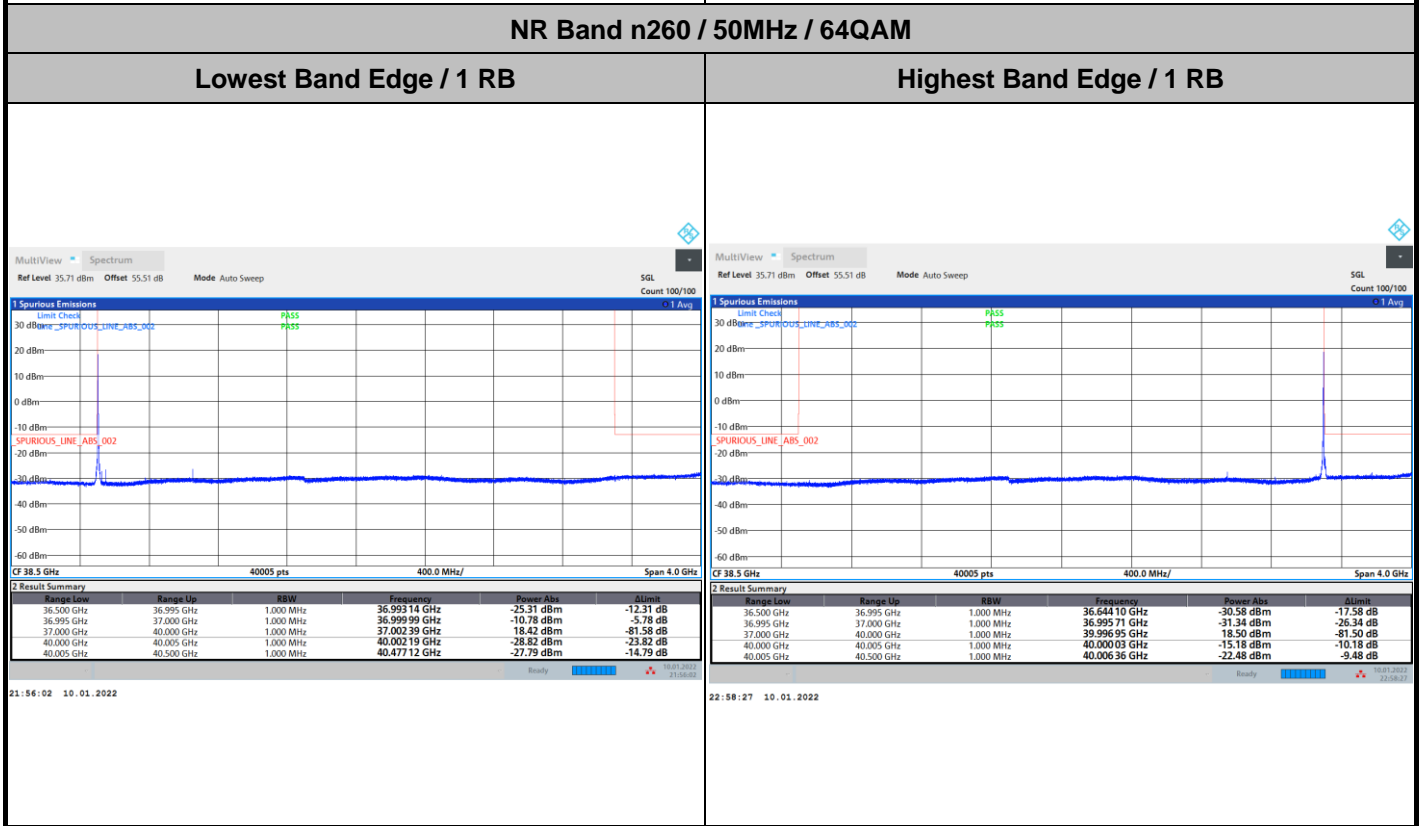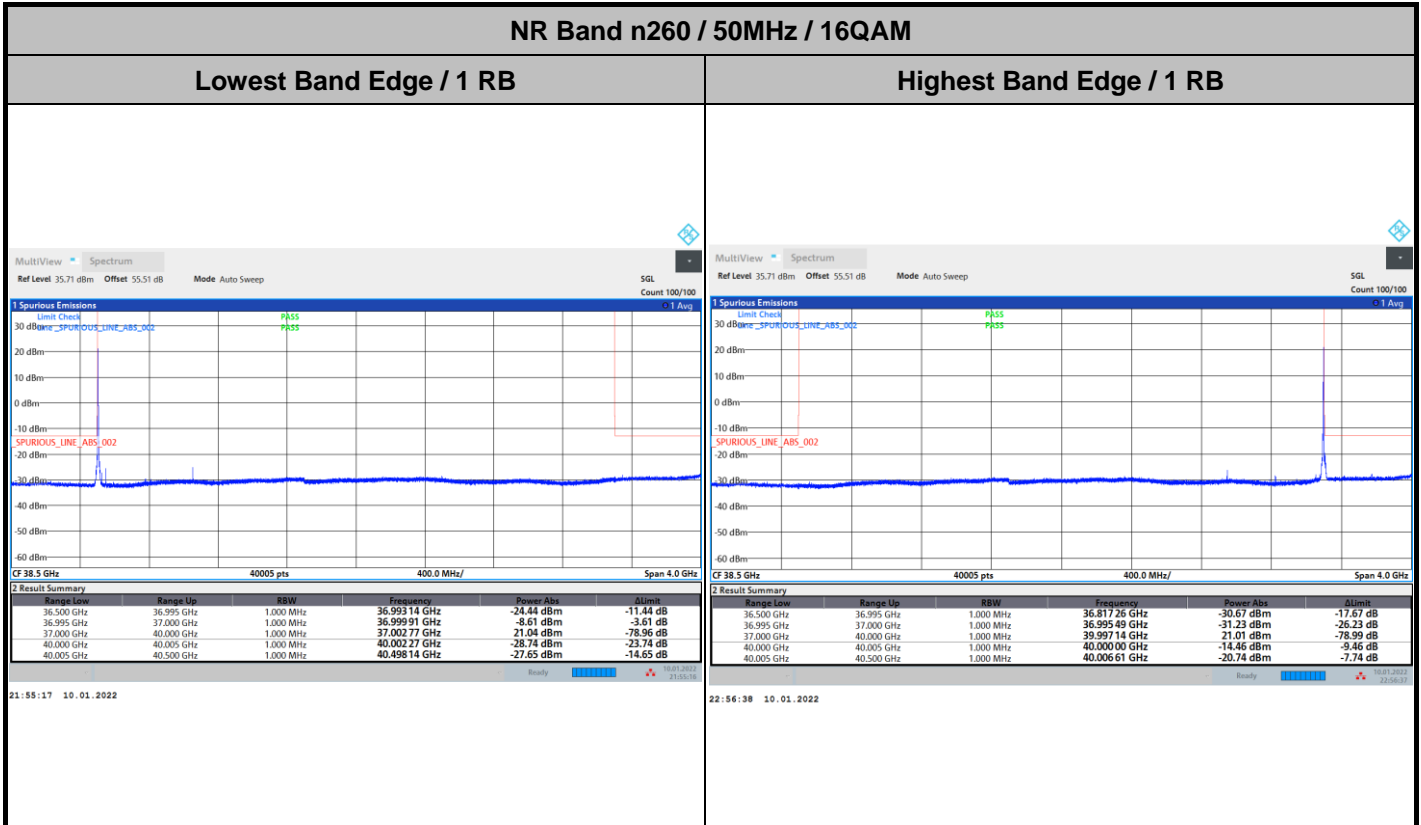



DFT-s-OFDM Module 0

