



HEARING AID COMPATIBILITY RF EMISSIONS TEST REPORT

FCC ID : IHDT56AE6
Equipment : Mobile Cellular Phone
Brand Name : Motorola
Model Name : XT2203-1
M-Rating : M3
Applicant : Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA
Manufacturer : Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA
Standard : FCC 47 CFR §20.19
ANSI C63.19-2011

The product was received on Jan. 19, 2022 and testing was started from Feb. 10, 2022 and completed on Feb. 21, 2022. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in ANSI 63.19-2011 / 47 CFR Part 20.19 and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Cona Huang / Deputy Manager

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

1. General Information 4

2. Testing Location 5

3. Applied Standards 5

4. RF Audio Interference Level 5

5. Air Interface and Operating Mode..... 6

6. Measurement System Specification 7

 6.1 E-Field Probe System..... 7

 6.2 Data Storage and Evaluation..... 8

7. RF Emissions Test Procedure 9

8. Test Equipment List..... 12

9. Measurement System Validation 13

10. Modulation Interference Factor..... 14

11. Low-power Exemption..... 15

12. Conducted RF Output Power (Unit: dBm)..... 19

13. HAC RF Emission Test Results 21

14. Uncertainty Assessment 23

15. References..... 24

Appendix A. Plots of System Performance Check

Appendix B. Plots of RF Emission Measurement

Appendix C. DASYS Calibration Certificate

Appendix D. Test Setup Photos



History of this test report

Report No.	Version	Description	Issued Date
HA1D2910A	Rev. 01	Initial issue of report	Mar. 02, 2022



1. General Information

Product Feature & Specification	
Applicant Name	Motorola Mobility LLC
Equipment Name	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2203-1
FCC ID	IHDT56AE6
EUT Stage	Identical Prototype
IMEI Code	Sample 1: 354596750037631 Sample 2: 35596750049008
Date Tested	2022/02/10 ~ 2022/02/21
Frequency Band	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 42: 3450 MHz ~ 3550 MHz LTE Band 66: 1710 MHz ~ 1780 MHz 5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5 : 824 MHz ~ 849 MHz 5G NR n7 : 2500 MHz ~ 2570 MHz 5G NR n38 : 2570 MHz ~ 2620 MHz 5G NR n66 : 1710 MHz ~ 1780 MHz 5G NR n78: 3450 MHz ~ 3550 MHz WLAN 2.4GHz Band: 2400 MHz ~ 2483.5 MHz WLAN 5.2G Band: 5150 MHz ~ 5250 MHz WLAN 5.3G Band: 5250 MHz ~ 5350 MHz WLAN 5.5G Band: 5470 MHz ~ 5725 MHz WLAN 5.8G Band: 5725 MHz ~ 5850 MHz WLAN 6E: 5925 MHz ~ 6425 MHz, 6425 MHz ~ 6525 MHz, 6525 MHz ~ 6875 MHz, 6875 MHz ~ 7125 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz NFC : 13.56 MHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA LTE: QPSK, 16QAM, 64QAM, 256QAM 5G NR: DFT-s-OFDM/CP-OFDM, Pi/2 BPSK/QPSK/16QAM/64QAM/256QAM WLAN: 802.11a/b/g/n/ac/ax HT20/HT40/VHT20/VHT40/VHT80/VHT160/HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE NFC:ASK
Remark:	1. This device has three samples. Selected Sample 1 as the main testing and Sample 2 will select worst case found in Sample 1 performs; Sample 3 was not perform due to only memory is different between Sample 2.

Reviewed by: Jason Wang
Report Producer: Carlie Tsai



2. Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.

Table with 2 columns: Test Site, Test Site Location, Test Site No. and 1 column: Testing Laboratory. Content includes SPOROTON INTERNATIONAL INC., No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.), and Sporton Site No.: SAR04-HY.

3. Applied Standards

- FCC CFR47 Part 20.19
ANSI C63.19-2011
FCC KDB 285076 D01 HAC Guidance v06
FCC KDB 285076 D03 HAC FAQ v01r05

4. RF Audio Interference Level

FCC wireless hearing aid compatibility rules ensure that consumers with hearing loss are able to access wireless communications services through a wide selection of handsets without experiencing disabling radio frequency (RF) interference or other technical obstacles.

To define and measure the hearing aid compatibility of handsets, in CFR47 part 20.19 ANSI C63.19 is referenced. A handset is considered hearing aid-compatible for acoustic coupling if it meets a rating of at least M3 under ANSI C63.19, and A handset is considered hearing aid compatible for inductive coupling if it meets a rating of at least T3.

According to ANSI C63.19 2011 version, for acoustic coupling, the RF electric field emissions of wireless communication devices should be measured and rated according to the emission level as below.

Table with 3 columns: Emission Categories, <960Mhz, >960Mhz. Rows include M1, M2, M3, M4 with corresponding dB (V/m) ranges.

Table 5.1 Telephone near-field categories in linear units



5. Air Interface and Operating Mode

Air Interface	Band MHz	Type	C63.19 Tested	Simultaneous Transmitter	Name of Voice Service	Power Reduction
GSM	GSM850	VO	Yes	WLAN, BT	CMRS Voice	No
	GSM1900			WLAN, BT		No
	EDGE850	VD	Yes	WLAN, BT	Google Duo	No
	EDGE1900			WLAN, BT		
WCDMA	Band II	VO	No ⁽¹⁾	WLAN, BT	CMRS Voice	No
	Band IV			WLAN, BT		No
	Band V			WLAN, BT		No
	HSPA	VD	No ⁽¹⁾	WLAN, BT	Google Duo	No
LTE (FDD)	Band 2	VD	No ⁽¹⁾	5G NR, WLAN, BT	VoLTE / Google Duo	No
	Band 4			5G NR, WLAN, BT		No
	Band 5			5G NR, WLAN, BT		No
	Band 7			5G NR, WLAN, BT		No
	Band 12			5G NR, WLAN, BT		No
	Band 13			5G NR, WLAN, BT		No
	Band 17			5G NR, WLAN, BT		No
	Band 26			5G NR, WLAN, BT		No
	Band 66			5G NR, WLAN, BT		No
LTE (TDD)	Band 38	VD	Yes	5G NR, WLAN, BT	VoLTE / Google Duo	No
	Band 41			5G NR, WLAN, BT		No
	Band 42			5G NR, WLAN, BT		No
5G NR	n2	VD	No ⁽¹⁾	LTE, WLAN, BT	Google Duo	No
	n5			LTE, WLAN, BT		No
	n7			LTE, WLAN, BT		No
	n38			LTE, WLAN, BT		No
	n66			LTE, WLAN, BT		No
	n78			LTE, WLAN, BT		No
Wi-Fi	2450	VD	Yes	GSM, WCDMA, LTE, 5G NR, 5G WLAN	VoWiFi / Google Duo	No
	5200			GSM, WCDMA, LTE, 5G NR, 2.4G WLAN, BT		No
	5300			GSM, WCDMA, LTE, 5G NR, 2.4G WLAN, BT		No
	5500			GSM, WCDMA, LTE, 5G NR, 2.4G WLAN, BT		No
	5800			GSM, WCDMA, LTE, 5G NR, 2.4G WLAN, BT		No
Wi-Fi	6E	VD	No ⁽²⁾	GSM, WCDMA, LTE, 5G NR, 2.4G WLAN, BT	VoWiFi / Google Duo	No
BT	2450	DT	No	GSM, WCDMA, LTE, 5G NR, WLAN	NA	No
Type Transport: VO= Voice only DT= Digital Transport only (no voice) VD= CMRS and IP Voice Service over Digital Transport						
Remark: 1. The air interface is exempted from testing by low power exemption that its average antenna input power plus its MIF is ≤17 dBm, and is rated as M4. 2. The WiFi 6E above 6GHz portion is currently not within the scope of FCC Part 20.19, and therefore not evaluated						

6. Measurement System Specification

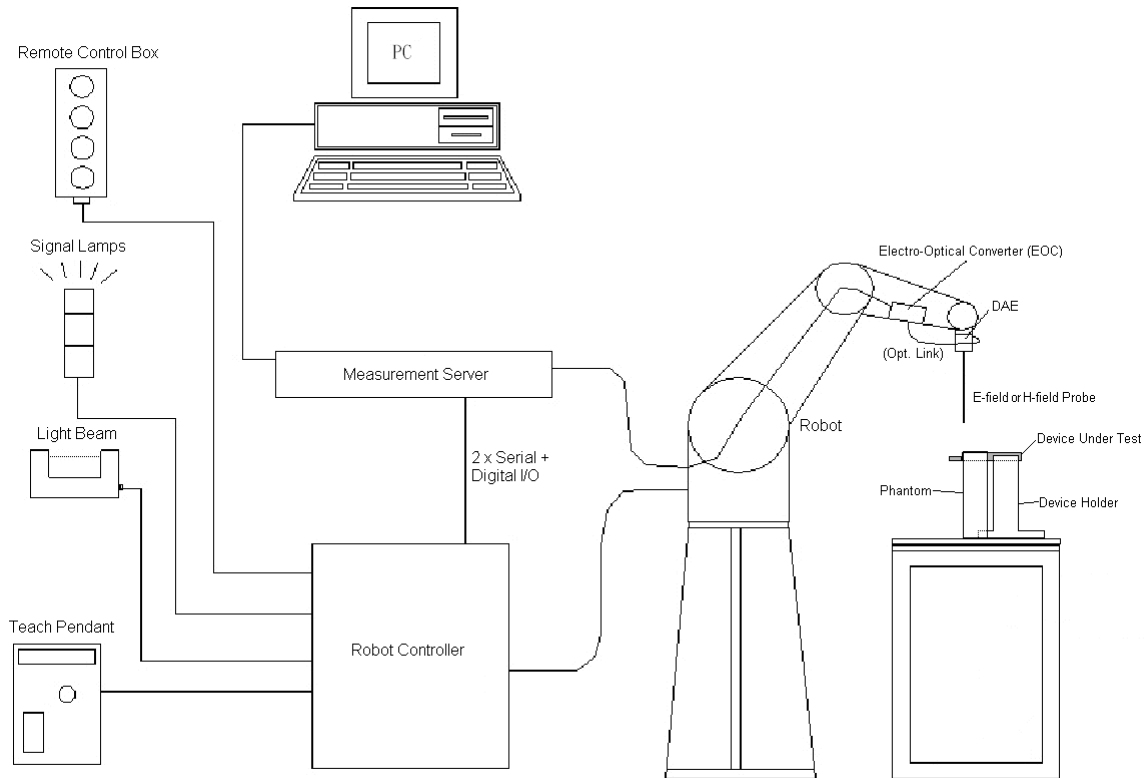


Fig 5.1 System Configurations

6.1 E-Field Probe System

E-Field Probe Specification

<ER3DV6>

Construction	One dipole parallel, two dipoles normal to probe axis Built-in shielding against static charges
Calibration	In air from 100 MHz to 3.0 GHz (absolute accuracy $\pm 6.0\%$, $k=2$)
Frequency	100 MHz to 6 GHz; Linearity: ± 2.0 dB (100 MHz to 3 GHz)
Directivity	± 0.2 dB in air (rotation around probe axis) ± 0.4 dB in air (rotation normal to probe axis)
Dynamic Range	2 V/m to 1000 V/m (M3 or better device readings fall well below diode compression point)
Linearity	± 0.2 dB
Dimensions	Overall length: 330 mm (Tip: 16 mm) Tip diameter: 8 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.5 mm



Fig 5.2 Photo of E-field Probe

Probe Tip Description:

HAC field measurements take place in the close near field with high gradients. Increasing the measuring distance from the source will generally decrease the measured field values (in case of the validation dipole approx. 10%/per mm).

6.2 Data Storage and Evaluation

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, and device frequency and modulation data) in measurement files.

Probe parameters :	- Sensitivity	Norm _i , a _{i0} , a _{i1} , a _{i2}
	- Conversion factor	ConvF _i
	- Diode compression point	dcp _i
Device parameters :	- Frequency	f
	- Crest factor	cf
Media parameters :	- Conductivity	σ
	- Density	ρ

The formula for each channel can be given as :

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = compensated signal of channel i , ($i = x, y, z$)
 U_i = input signal of channel i , ($i = x, y, z$)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated :

$$\text{E-field Probes : } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

with V_i = compensated signal of channel i , ($i = x, y, z$)
 Norm_i = sensor sensitivity of channel i , ($i = x, y, z$), $\mu\text{V}/(\text{V/m})^2$ for E-field Probes
 ConvF = sensitivity enhancement in solution
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m

The RSS value of the field components gives the total field strength (Hermitian magnitude) :

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.



7. RF Emissions Test Procedure

Referenced from ANSI C63.19 -2011 section 5.5.1

- a. Confirm the proper operation of the field probe, probe measurement system, and other instrumentation and the positioning system.
- b. Position the WD in its intended test position.
- c. Set the WD to transmit a fixed and repeatable combination of signal power and modulation characteristic that is representative of the worst case (highest interference potential) encountered in normal use. Transiently occurring start-up, changeover, or termination conditions, or other operations likely to occur less than 1% of the time during normal operation, may be excluded from consideration.
- d. The center sub-grid shall be centered on the T-Coil mode perpendicular measurement point or the acoustic output, as appropriate. Locate the field probe at the initial test position in the 50 mm by 50 mm grid, which is contained in the measurement plane, refer to illustrated in Figure 8.2. If the field alignment method is used, align the probe for maximum field reception.
- e. Record the reading at the output of the measurement system.
- f. Scan the entire 50 mm by 50 mm region in equality spaced increments and record the reading at each measurement point, The distance between measurement points shall be sufficient to assure the identification of the maximum reading.
- g. Identify the five contiguous sub-grids around the center sub-grid whose maximum reading is the lowest of all available choices. This eliminates the three sub-grids with the maximum readings. Thus, the six areas to be used to determine the WD's highest emissions are identified.
- h. Identify the maximum reading within the non-excluded sub-grids identified in step g).
 - i. Indirect measurement method
 - j. The RF audio interference level in dB (V/m) is obtained by adding the MIF (in dB) to the maximum steady-state rms field-strength reading, in dB (V/m)
- k. Compare this RF audio interference level with the categories in ANSI C63.19-2011 clause 8 and record the resulting WD category rating.
- l. For the T-Coil perpendicular measurement location is ≥ 5.0 mm from the center of the acoustic output, then two different 50 mm by 50 mm areas may need to be scanned, the first for the microphone mode assessment and the second for the T-Coil assessment.
- m. The second for the T-Coil assessment, with the grid shifted so that it is centered on the perpendicular measurement point. Record the WD category rating.

Test Instructions

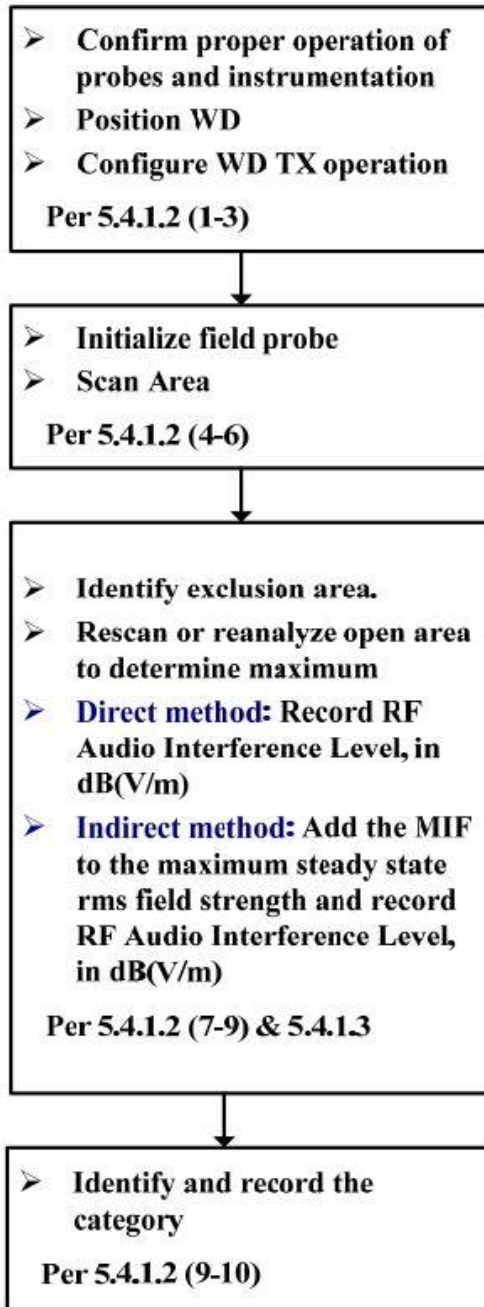


Figure 8.1 RF Emissions Flow Chart

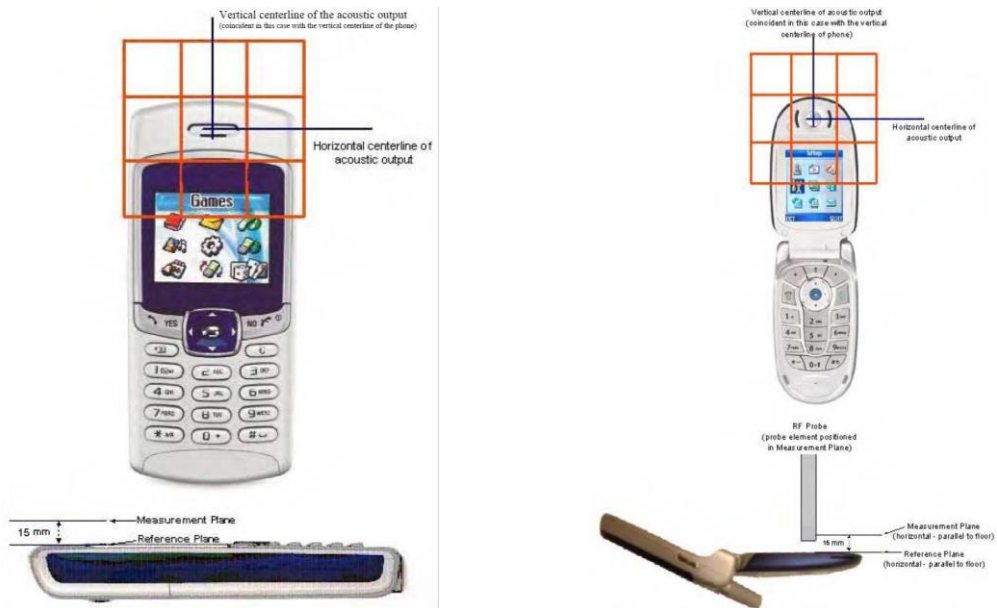


Fig 8.2 EUT reference and plane for HAC RF emission measurements

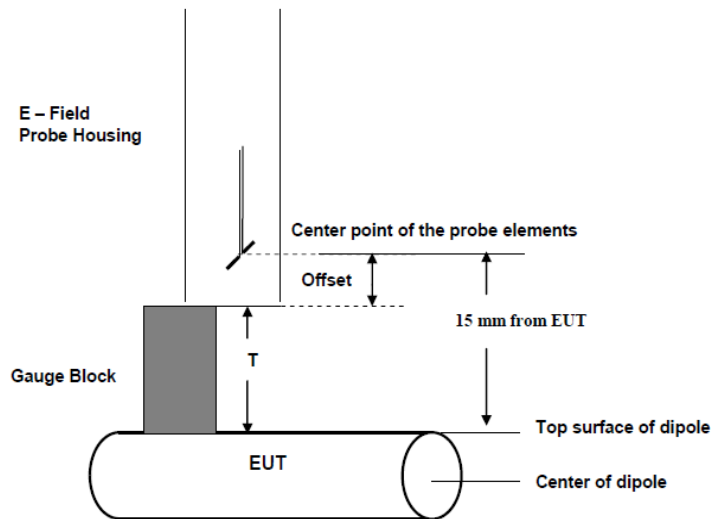


Fig. 8.3 Gauge block with E-field probe



8. Test Equipment List

Table with 6 columns: Manufacturer, Name of Equipment, Type/Model, Serial Number, Last Cal., Due Date. Rows include various calibration dipoles, meters, and test equipment from manufacturers like SPEAG, Anritsu, and Mini-Circuits.

Note:

- 1. NCR: "No-Calibration Required"
2. The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval.

9. Measurement System Validation

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the test Arch and a corresponding distance holder.

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal HAC measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

<Test Setup>

1. In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator.
2. The center point of the probe element(s) is 15mm from the closest surface of the dipole elements.
3. The calibrated dipole must be placed beneath the arch phantom. The equipment setup is shown below:
4. The output power on dipole port must be calibrated to 20dBm (100mW) before dipole is connected.

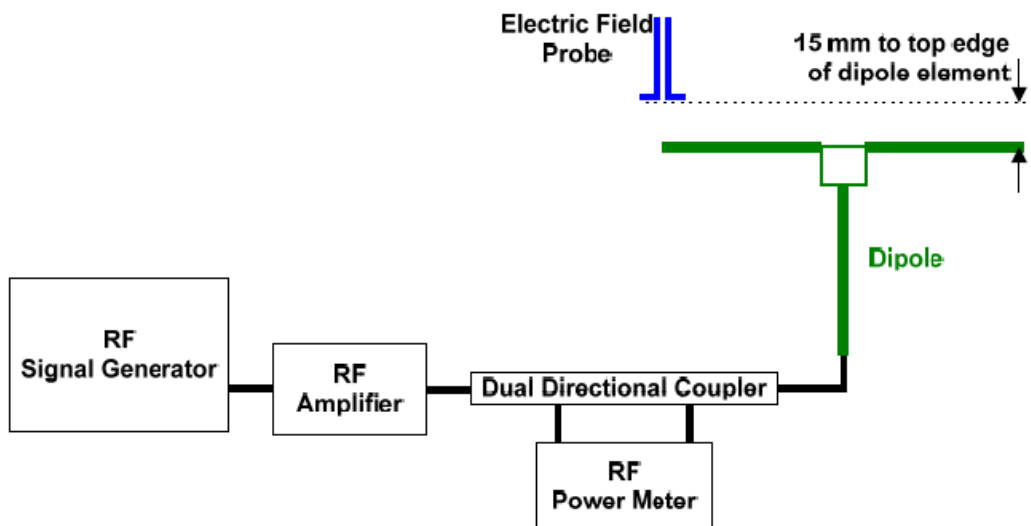


Fig. 7.1 Setup Diagram

<Validation Results>

Comparing to the original E-field value provided by SPEAG, the verification data should be within its specification of 25 %. Table 6.1 shows the target value and measured value. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to appendix A of this report.

$$\text{Deviation} = ((\text{Average E-field Value}) - (\text{Target value})) / (\text{Target value}) * 100\%$$

Frequency (MHz)	Input Power (dBm)	Target Value (V/m)	E-Field 1 (V/m)	E-Field 2 (V/m)	Average Value (V/m)	Deviation (%)	Date
835	20	109.3	118.2	119.1	118.65	8.55	Feb 21, 2022
1880	20	85.5	91.13	92.14	91.635	7.18	Feb 21, 2022
2450	20	84.3	85.58	85.54	85.56	1.49	Feb 21, 2022
2600	20	84.5	86.53	87.84	87.185	3.18	Feb 21, 2022
3500	20	84.6	92.63	92.42	92.525	9.37	Feb 10, 2022
5500	20	100	106.2	109.9	108.05	8.05	Feb 21, 2022



10. Modulation Interference Factor

The HAC Standard ANSI C63.19-2011 defines a new scaling using the Modulation Interference Factor (MIF). For any specific fixed and repeatable modulated signal, a modulation interference factor (MIF, expressed in dB) may be developed that relates its interference potential to its steady-state rms signal level or average power level. This factor is a function only of the audio-frequency amplitude modulation characteristics of the signal and is the same for field-strength and conducted power measurements. It is important to emphasize that the MIF is valid only for a specific repeatable audio-frequency amplitude modulation characteristic. Any change in modulation characteristic requires determination and application of a new MIF

The Modulation Interference factor (MIF, in dB) is added to the measured average E-field (in dBV/m) and converts it to the RF Audio Interference level (in dBV/m). This level considers the audible amplitude modulation components in the RF E-field. CW fields without amplitude modulation are assumed to not interfere with the hearing aid electronics. Modulations without time slots and low fluctuations at low frequencies have low MIF values, TDMA modulations with narrow transmission and repetition rates of few 100 Hz have high MIF values and give similar classifications as ANSI C63.19-2011.

ER3D, EF3D and EU2D E-field probes have a bandwidth <10 kHz and can therefore not evaluate the RF envelope in the full audio band. DASY52 is therefore using the indirect measurement method according to ANSI C63.19-2011 which is the primary method. These near field probes read the averaged E-field measurement. Especially for the new high peak-to-average (PAR) signal types, the probes shall be linearized by PMR calibration in order to not overestimate the field reading. Probe Modulation Response (PMR) calibration linearizes the probe response over its dynamic range for specific modulations which are characterized by their UID and result in an uncertainty specified in the probe calibration certificate. The MIF is characteristic for a given waveform envelope and can be used as a constant conversion factor if the probe has been PMR calibrated.

The evaluation method for the MIF is defined in ANSI C63.19-2011 section D.7. An RMS demodulated RF signal is fed to a spectral filter (similar to an A weighting filter) and forwarded to a temporal filter acting as a quasi-peak detector. The averaged output of these filtering is scaled to a 1 kHz 80% AM signal as reference. MIF measurement requires additional instrumentation and is not well suited for evaluation by the end user with reasonable uncertainty. It may alternatively be determined through analysis and simulation, because it is constant and characteristic for a communication signal. DASY52 uses well-defined signals for PMR calibration. The MIF of these signals has been determined by simulation and it is automatically applied.

The MIF measurement uncertainty is estimated as follows, declared by HAC equipment provider SPEAG, for modulation frequencies from slotted waveforms with fundamental frequency and at least 2 harmonics within 10 kHz:

1. 0.2 dB for MIF: -7 to +5 dB
2. 0.5 dB for MIF: -13 to +11 dB
3. 1 dB for MIF: > -20 dB

MIF values applied in this test report were provided by the HAC equipment provider of SPEAG, and the worst values for all air interface are listed below to be determine the Low-power Exemption.

UID	Communication System Name	MIF(dB)
10021	GSM-FDD(TDMA,GMSK)	3.63
10025	EDGE-FDD (TDMA, 8PSK, TN 0)	3.75
10460	UMTS-FDD(WCDMA, AMR)	-25.43
10170	LTE-FDD(SC-FDMA,1RB,20MHz,16-QAM)	-9.76
10173	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	-1.44
10769	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz)	-12.08
10061	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	-2.02
10077	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)	0.12
10427	IEEE 802.11n (HT Greeneld, 150 Mbps, 64-QAM)	-13.44
10069	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)	-3.15
10616	IEEE 802.11ac WiFi (40MHz, MCS0, 90pc duty cycle)	-5.57
10671	IEEE 802.11ax (20MHz, MCS0, 90pc duty cycle)	-5.58



11. Low-power Exemption

<Max Tune-up Limit>

Frequency Band		Average Power (dBm)					
		Ant 0	Ant 1	Ant 2	Ant 4	Ant 7	Ant 8
GSM	GSM850	33.5	33.5				
	EDGE850	27.0	27.0				
	GSM1900	30.5					
	EDGE1900	26.5					
WCDMA	Band II	24.0					
	Band IV	24.0					
	Band V	24.0	24.0				
	HSPA	23.0	23.0				
FDD LTE	Band 2	24.0	24.0				
	Band 4	24.0	24.0				
	Band 5		24.0				
	Band 7	24.0	24.0				
	Band 12		25.0				
	Band 13	25.0					
	Band 17		25.0				
	Band 26		24.0				
TDD LTE	Band 66	24.0	24.0				
	Band 38/41	24.0	24.0				
	Band 38/41 HPUE	27.0					
5G NR FDD	Band 42				24.0		
	n2		24.0				
	n5		24.0				
	n7	24.0					
5G NR TDD	n66	24.0	24.0				
	n38	24.0					
	n78 HPUE			24.0	27.0	24.0	25.5



<Low Power Exemption>

<Ant 0>

Air Interface	Max Average Antenna Input Power (dBm)	Worst Case MIF (dB)	Power + MIF(dB)	C63.19 test required
GSM850	33.50	3.63	37.13	Yes
EDGE850	27.00	3.75	30.75	Yes ⁽¹⁾
GSM1900	30.50	3.63	34.13	Yes
EDGE1900	26.50	3.75	30.25	Yes ⁽¹⁾
WCDMA	24.00	-25.43	-1.43	No
WCDMA - HSPA	23.00	-20.39	2.61	No
LTE - FDD	25.00	-9.76	15.24	No
LTE – TDD - PC3	24.00	-1.44	22.56	Yes
LTE – TDD - PC2	27.00	-1.44	25.56	Yes
5G FR1 - FDD	24.00	-12.08	11.92	No
5G NR – TDD - PC3	24.00	-12.08	11.92	No

General Note:

- EDGE data modes is not necessary due the GSM Voice mode is the worst case.
- According to ANSI C63.19 2011-version, for the air interface technology of a device is exempt from testing when its average antenna input power plus its MIF is ≤ 17 dBm for any of its operating modes.
- HAC RF rating is M4 for the air interface which meets the low power exemption.

<Ant 1>

Air Interface	Max Average Antenna Input Power (dBm)	Worst Case MIF (dB)	Power + MIF(dB)	C63.19 test required
GSM850	33.50	3.63	37.13	Yes
EDGE850	27.00	3.75	30.75	Yes ⁽¹⁾
WCDMA	24.00	-25.43	-1.43	No
WCDMA - HSPA	23.00	-20.39	2.61	No
LTE - FDD	25.00	-9.76	15.24	No
LTE – TDD - PC3	24.00	-1.44	22.56	Yes
5G FR1 - FDD	24.00	-12.08	11.92	No

General Note:

- EDGE data modes is not necessary due the GSM Voice mode is the worst case.
- According to ANSI C63.19 2011-version, for the air interface technology of a device is exempt from testing when its average antenna input power plus its MIF is ≤ 17 dBm for any of its operating modes.
- HAC RF rating is M4 for the air interface which meets the low power exemption.

<Ant 2>

Air Interface	Max Average Antenna Input Power (dBm)	Worst Case MIF (dB)	Power + MIF(dB)	C63.19 test required
5G NR – TDD – PC2	24.00	-12.08	11.92	No

General Note:

- According to ANSI C63.19 2011-version, for the air interface technology of a device is exempt from testing when its average antenna input power plus its MIF is ≤ 17 dBm for any of its operating modes.
- HAC RF rating is M4 for the air interface which meets the low power exemption.



<Ant 4>

Air Interface	Max Average Antenna Input Power (dBm)	Worst Case MIF (dB)	Power + MIF(dB)	C63.19 test required
LTE – TDD – PC3	24.00	-1.44	22.56	Yes
5G NR - TDD - PC2	27.00	-12.08	14.92	No

General Note:

- 1. According to ANSI C63.19 2011-version, for the air interface technology of a device is exempt from testing when its average antenna input power plus its MIF is ≤ 17 dBm for any of its operating modes.
- 2. HAC RF rating is M4 for the air interface which meets the low power exemption.

<Ant 7>

Air Interface	Max Average Antenna Input Power (dBm)	Worst Case MIF (dB)	Power + MIF(dB)	C63.19 test required
5G NR – TDD – PC2	24.00	-12.08	11.92	No

General Note:

- 1. According to ANSI C63.19 2011-version, for the air interface technology of a device is exempt from testing when its average antenna input power plus its MIF is ≤ 17 dBm for any of its operating modes.
- 2. HAC RF rating is M4 for the air interface which meets the low power exemption.

<Ant 8>

Air Interface	Max Average Antenna Input Power (dBm)	Worst Case MIF (dB)	Power + MIF(dB)	C63.19 test required
5G NR - TDD - PC2	25.50	-12.08	13.42	No

General Note:

- 1. According to ANSI C63.19 2011-version, for the air interface technology of a device is exempt from testing when its average antenna input power plus its MIF is ≤ 17 dBm for any of its operating modes.
- 2. HAC RF rating is M4 for the air interface which meets the low power exemption.



<WLAN>

Frequency Band		Average Power (dBm)
2.4GHz WLAN	802.11b	20.00
	802.11g	20.00
	802.11n-HT20	20.00
	802.11n-HT40	20.00
	802.11ax-HE20	20.00
	802.11ax-HE40	20.00
5GHz WLAN	802.11a	20.50
	802.11n-HT20	20.50
	802.11n-HT40	20.50
	802.11ac-VHT20	20.50
	802.11ac-VHT40	20.50
	802.11ac-VHT80	20.50
	802.11ac-VHT160	15.00
	802.11ax-HE20	20.50
	802.11ax-HE40	20.50
	802.11ax-HE80	19.50
802.11ax-HE160	15.00	

Air Interface	Max Average Antenna Input Power (dBm)	Worst Case MIF (dB)	Power + MIF(dB)	C63.19 test required
802.11b	20.00	-2.02	17.98	Yes ⁽¹⁾
802.11g	20.00	0.12	20.12	Yes
802.11n-HT20	20.00	-13.44	6.56	No
802.11n-HT40	20.00	-13.44	6.56	No
802.11ax-HE20	20.00	-5.58	14.42	No
802.11ax-HE40	20.00	-5.58	14.42	No
802.11a	20.50	-3.15	17.35	Yes
802.11n-HT20	20.50	-13.44	7.06	No
802.11n-HT40	20.50	-13.44	7.06	No
802.11ac-VHT20	20.50	-5.57	14.93	No
802.11ac-VHT40	20.50	-5.57	14.93	No
802.11ac-VHT80	20.50	-5.57	14.93	No
802.11ac-VHT160	15.00	-5.57	9.43	No
802.11ax-HE20	20.50	-5.58	14.92	No
802.11ax-HE40	20.50	-5.58	14.92	No
802.11ax-HE80	19.50	-5.58	13.92	No
802.11ax-HE160	15.00	-5.58	9.42	No

General Note:

1. 802.11b modes is not necessary due the 802.11g mode is the worst case.
2. According to ANSI C63.19 2011-version, for the air interface technology of a device is exempt from testing when its average antenna input power plus its MIF is ≤17 dBm for any of its operating modes.
3. HAC RF rating is M4 for the air interface which meets the low power exemption.



12. Conducted RF Output Power (Unit: dBm)

<Ant 0>

Average Antenna Input Power(dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
GSM (GMSK, 1 Tx slot)	32.14	32.07	32.05	29.47	29.86	29.56

<Ant 1>

Average Antenna Input Power(dBm)			
Band	GSM850		
Channel	128	189	251
Frequency (MHz)	824.2	836.4	848.8
GSM (GMSK, 1 Tx slot)	32.14	32.17	32.13

<TDD LTE Band 38_Ant 1>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				37850	38000	38150
Frequency (MHz)				2580	2595	2610
20	QPSK	1	0	22.66	22.70	22.62

<TDD LTE Band 41_Ant 0>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				39750	40185	40620	41055	41490
Frequency (MHz)				2506	2549.5	2593	2636.5	2680
20	QPSK	1	0	22.84	22.95	23.05	22.96	22.86

<TDD LTE Band 41 HPUE_Ant 0>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				39750	40185	40620	41055	41490
Frequency (MHz)				2506	2549.5	2593	2636.5	2680
20	QPSK	1	0	25.26	25.23	25.33	25.25	25.17

<TDD LTE Band 42_Ant 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				42190	42590	42990
Frequency (MHz)				3460	3500	3540
20	QPSK	1	0	22.80	22.91	22.82



<WLAN 2.4GHz Ant 3+5>

2.4GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)
2.4GHz WLAN	802.11g 6Mbps	1	2412	18.23
		6	2437	18.13
		11	2462	18.29

<WLAN 5GHz Ant 3+5>

5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)
5.2GHz WLAN	802.11a 6Mbps	36	5180	18.85
		40	5200	18.92
		44	5220	18.90
		48	5240	18.82

5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)
5.3GHz WLAN	802.11a 6Mbps	52	5260	18.97
		56	5280	19.16
		60	5300	19.04
		64	5320	18.97

5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)
5.5GHz WLAN	802.11a 6Mbps	100	5500	17.81
		116	5580	17.98
		124	5620	18.03
		132	5660	18.05
		140	5700	17.77
		144	5720	18.10

5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)
5.8GHz WLAN	802.11a 6Mbps	149	5745	18.01
		157	5785	18.09
		165	5825	18.14



13. HAC RF Emission Test Results

Plot No.	Air Interface	Modulation / Mode	Channel	Sample	Transmit Ant.	Average Antenna Input Power (dBm)	MIF	E-Field (dBV/m)	Margin to FCC M3 limit (dB)	E-Field M Rating
1	GSM850	Voice	128	Sample 1	Ant 0	32.14	3.63	34.30	10.70	M4
2	GSM850	Voice	189	Sample 1	Ant 0	32.07	3.63	34.28	10.72	M4
3	GSM850	Voice	251	Sample 1	Ant 0	32.05	3.63	34.17	10.83	M4
46	GSM850	Voice	128	Sample 2	Ant 0	32.14	3.63	32.44	12.56	M4
4	GSM850	Voice	128	Sample 1	Ant 1	32.14	3.63	41.17	3.83	M3
5	GSM850	Voice	189	Sample 1	Ant 1	32.17	3.63	43.26	1.74	M3
6	GSM850	Voice	251	Sample 1	Ant 1	32.13	3.63	41.71	3.29	M3
47	GSM850	Voice	189	Sample 2	Ant 1	32.17	3.63	44.25	0.75	M3
7	GSM1900	Voice	512	Sample 1	Ant 0	29.47	3.63	27.14	7.86	M4
8	GSM1900	Voice	661	Sample 1	Ant 0	29.86	3.63	27.24	7.76	M4
9	GSM1900	Voice	810	Sample 1	Ant 0	29.56	3.63	27.32	7.68	M4
48	GSM1900	Voice	810	Sample 2	Ant 0	29.56	3.63	26.77	8.23	M4
10	LTE Band 38	20M_QPSK_1_0	37850	Sample 1	Ant 1	22.66	-1.44	18.26	16.74	M4
11	LTE Band 38	20M_QPSK_1_0	38000	Sample 1	Ant 1	22.70	-1.44	17.33	17.67	M4
12	LTE Band 38	20M_QPSK_1_0	38150	Sample 1	Ant 1	22.62	-1.44	17.76	17.24	M4
49	LTE Band 38	20M_QPSK_1_0	37850	Sample 2	Ant 1	22.66	-1.44	18.26	16.74	M4
13	LTE Band 41	20M_QPSK_1_0	39750	Sample 1	Ant 0	22.84	-1.44	18.00	17.00	M4
14	LTE Band 41	20M_QPSK_1_0	40185	Sample 1	Ant 0	22.95	-1.44	17.44	17.56	M4
15	LTE Band 41	20M_QPSK_1_0	40620	Sample 1	Ant 0	23.05	-1.44	17.01	17.99	M4
16	LTE Band 41	20M_QPSK_1_0	41055	Sample 1	Ant 0	22.96	-1.44	18.04	16.96	M4
17	LTE Band 41	20M_QPSK_1_0	41490	Sample 1	Ant 0	22.86	-1.44	17.79	17.21	M4
50	LTE Band 41	20M_QPSK_1_0	41055	Sample 2	Ant 0	22.96	-1.44	19.91	15.09	M4
18	LTE Band 41_HPUE	20M_QPSK_1_0	39750	Sample 1	Ant 0	25.26	-1.44	16.41	18.59	M4
19	LTE Band 41_HPUE	20M_QPSK_1_0	40185	Sample 1	Ant 0	25.23	-1.44	15.91	19.09	M4
20	LTE Band 41_HPUE	20M_QPSK_1_0	40620	Sample 1	Ant 0	25.33	-1.44	15.58	19.42	M4
21	LTE Band 41_HPUE	20M_QPSK_1_0	41055	Sample 1	Ant 0	25.25	-1.44	16.82	18.18	M4
22	LTE Band 41_HPUE	20M_QPSK_1_0	41490	Sample 1	Ant 0	25.17	-1.44	17.38	17.62	M4
51	LTE Band 41_HPUE	20M_QPSK_1_0	41490	Sample 2	Ant 0	25.17	-1.44	18.32	16.68	M4
23	LTE Band 42	20M_QPSK_1_0	42190	Sample 1	Ant 4	22.80	-1.44	30.71	4.29	M3
24	LTE Band 42	20M_QPSK_1_0	42590	Sample 1	Ant 4	22.91	-1.44	30.55	4.45	M3
25	LTE Band 42	20M_QPSK_1_0	42990	Sample 1	Ant 4	22.82	-1.44	30.42	4.58	M3
52	LTE Band 42	20M_QPSK_1_0	42990	Sample 2	Ant 4	22.80	-1.44	33.57	1.43	M3



Plot No.	Air Interface	Modulation / Mode	Channel	Sample	Transmit Ant.	Average Antenna Input Power (dBm)	MIF	E-Field (dBV/m)	Margin to FCC M3 limit (dB)	E-Field M Rating
26	WLAN2.4GHz	802.11g 6Mbps	1	Sample 1	Ant 3+5	18.23	0.12	29.16	5.84	M4
27	WLAN2.4GHz	802.11g 6Mbps	6	Sample 1	Ant 3+5	18.13	0.12	29.81	5.19	M4
28	WLAN2.4GHz	802.11g 6Mbps	11	Sample 1	Ant 3+5	18.29	0.12	29.69	5.31	M4
53	WLAN2.4GHz	802.11g 6Mbps	6	Sample 2	Ant 3+5	18.13	0.12	29.55	5.45	M4
29	WLAN5GHz	802.11a 6Mbps	36	Sample 1	Ant 3+5	18.85	-3.15	22.93	12.07	M4
30	WLAN5GHz	802.11a 6Mbps	40	Sample 1	Ant 3+5	18.92	-3.15	22.93	12.07	M4
31	WLAN5GHz	802.11a 6Mbps	44	Sample 1	Ant 3+5	18.90	-3.15	22.85	12.15	M4
32	WLAN5GHz	802.11a 6Mbps	48	Sample 1	Ant 3+5	18.82	-3.15	22.83	12.17	M4
33	WLAN5GHz	802.11a 6Mbps	52	Sample 1	Ant 3+5	18.97	-3.15	23.28	11.72	M4
34	WLAN5GHz	802.11a 6Mbps	56	Sample 1	Ant 3+5	19.16	-3.15	23.36	11.64	M4
35	WLAN5GHz	802.11a 6Mbps	60	Sample 1	Ant 3+5	19.04	-3.15	23.67	11.33	M4
36	WLAN5GHz	802.11a 6Mbps	64	Sample 1	Ant 3+5	18.97	-3.15	23.87	11.13	M4
37	WLAN5GHz	802.11a 6Mbps	100	Sample 1	Ant 3+5	17.81	-3.15	22.99	12.01	M4
38	WLAN5GHz	802.11a 6Mbps	116	Sample 1	Ant 3+5	17.98	-3.15	22.93	12.07	M4
39	WLAN5GHz	802.11a 6Mbps	124	Sample 1	Ant 3+5	18.03	-3.15	22.64	12.36	M4
40	WLAN5GHz	802.11a 6Mbps	132	Sample 1	Ant 3+5	18.05	-3.15	24.02	10.98	M4
41	WLAN5GHz	802.11a 6Mbps	140	Sample 1	Ant 3+5	17.77	-3.15	23.93	11.07	M4
42	WLAN5GHz	802.11a 6Mbps	144	Sample 1	Ant 3+5	18.10	-3.15	24.60	10.40	M4
43	WLAN5GHz	802.11a 6Mbps	149	Sample 1	Ant 3+5	18.01	-3.15	24.68	10.32	M4
44	WLAN5GHz	802.11a 6Mbps	157	Sample 1	Ant 3+5	18.09	-3.15	24.68	10.32	M4
45	WLAN5GHz	802.11a 6Mbps	165	Sample 1	Ant 3+5	18.14	-3.15	24.66	10.34	M4
54	WLAN5GHz	802.11a 6Mbps	149	Sample 2	Ant 3+5	18.01	-3.15	24.39	10.61	M4

Remark:

1. The HAC measurement system applies MIF value onto the measured RMS E-field, which is indirect method in ANSI C63.19 2011 version, and reports the RF audio interference level.
2. Phone Condition: Mute on; Backlight off; Max Volume

Test Engineer : Ken Lin and Willie Huang



14. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual “root-sum-squares” (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances. Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASy uncertainty Budget is showed in Table 12.1.

The judgment of conformity in the report is based on the measurement results excluding the measurement uncertainty.

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (E)	Standard Uncertainty (E)
Measurement System					
Probe Calibration	5.1	Normal	1	1	± 5.1 %
Axial Isotropy	4.7	Rectangular	√3	1	± 2.7 %
Sensor Displacement	16.5	Rectangular	√3	1	± 9.5 %
Boundary Effects	2.4	Rectangular	√3	1	± 1.4 %
Phantom Boundary Effects	7.2	Rectangular	√3	1	± 4.1 %
Linearity	4.7	Rectangular	√3	1	± 2.7 %
Scaling with PMR Calibration	10.0	Rectangular	√3	1	± 5.77 %
System Detection Limit	1.0	Rectangular	√3	1	± 0.6 %
Readout Electronics	0.3	Normal	1	1	± 0.3 %
Response Time	0.8	Rectangular	√3	1	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	± 1.5 %
RF Ambient Conditions	3.0	Rectangular	√3	1	± 1.7 %
RF Reflections	12.0	Rectangular	√3	1	± 6.9 %
Probe Positioner	1.2	Rectangular	√3	1	± 0.7 %
Probe Positioning	4.7	Rectangular	√3	1	± 2.7 %
Extrap. and Interpolation	1.0	Rectangular	√3	1	± 0.6 %
Test Sample Related					
Device Positioning Vertical	4.7	Rectangular	√3	1	± 2.7 %
Device Positioning Lateral	1.0	Rectangular	√3	1	± 0.6 %
Device Holder and Phantom	2.4	Rectangular	√3	1	± 1.4 %
Power Drift	5.0	Rectangular	√3	1	± 2.9 %
Phantom and Setup Related					
Phantom Thickness	2.4	Rectangular	√3	1	± 1.4 %
Combined Standard Uncertainty					± 16.30 %
Coverage Factor for 95 %					K = 2
Expanded Std. Uncertainty on Power					± 32.6 %
Expanded Std. Uncertainty on Field					± 16.3 %
Declaration of Conformity: The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.					
Comments and Explanations: The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.					

Uncertainty Budget of HAC free field assessment



15. References

- [1] ANSI C63.19-2011, "American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids", 27 May 2011.
- [2] FCC KDB 285076 D01v06, "Equipment Authorization Guidance for Hearing Aid Compatibility", Feb. 2022.
- [3] FCC KDB 285076 D03v01r05, "Hearing aid compatibility frequently asked questions", Feb. 2022
- [4] SPEAG DASY System Handbook