



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2243-1
FCC ID : IHDT56AF5
STANDARD : 47 CFR Part 2, Part 27 Subpart Q
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S) : Jun. 07, 2021 ~ Jun. 15, 2021

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY..... 3
SUMMARY OF TEST RESULT 4
1 GENERAL DESCRIPTION 5
1.1 Applicant 5
1.2 Manufacturer 5
1.3 Product Feature of Equipment Under Test 5
1.4 Product Specification of Equipment Under Test 6
1.5 Modification of EUT 6
1.6 Maximum EIRP Power and Emission Designator 7
1.7 Testing Site 8
1.8 Test Software 8
1.9 Applied Standards 8
1.10 Specification of Accessory 9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 10
2.1 Test Mode 10
2.2 Connection Diagram of Test System 11
2.3 Support Unit used in test configuration and system 11
2.4 Measurement Results Explanation Example 11
2.5 Frequency List of Low/Middle/High Channels 12
3 CONDUCTED TEST ITEMS 13
3.1 Measuring Instruments 13
3.2 Test Setup 13
3.3 Test Result of Conducted Test 13
3.4 Conducted Output Power Measurement 14
3.5 Peak-to-Average Ratio 15
3.6 EIRP 16
3.7 Occupied Bandwidth 17
3.8 Conducted Band Edge Measurement 18
3.9 Conducted Spurious Emission Measurement 19
3.10 Frequency Stability Measurement 20
4 RADIATED TEST ITEMS 21
4.1 Measuring Instruments 21
4.2 Test Setup 21
4.3 Test Result of Radiated Test 22
4.4 Radiated Spurious Emission Measurement 23
5 LIST OF MEASURING EQUIPMENT 24
6 UNCERTAINTY OF EVALUATION 25
APPENDIX A. TEST RESULTS OF CONDUCTED TEST
APPENDIX B. TEST RESULTS OF RADIATED TEST
APPENDIX C. TEST SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	—	Report Only	-
3.5	§27.50 (k)(4)	Peak-to-Average Ratio	<13dB	PASS	
3.6	§27.50 (k)(3)	EIRP	EIRP < 1W (30dBm)	PASS	-
3.7	§2.1049	Occupied Bandwidth	—	Report Only	-
3.8	§2.1051 §27.53 (n)(2)	Conducted Band Edge Measurement	-13dBm/MHz	PASS	-
3.9	§2.1051 §27.53 (n)(2)	Conducted Spurious Emission	-13dBm/MHz	PASS	-
3.10	§2.1055 §27.54	Frequency Stability Temperature & Voltage	Within the band	PASS	-
4.4	§2.1053 §27.53 (n)(2)	Radiated Spurious Emission	-13dBm/MHz	PASS	Under limit 29.74 dB at 10336.00 MHz

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2243-1
FCC ID	IHDT56AF5
IMEI Code	Conducted : 353593830018955 Radiation : 35359380019631
HW Version	DVT2
SW Version	SSJ32.60
EUT Stage	Identical Prototype

1.4 Product Specification of Equipment Under Test

Product Feature	
Tx/Rx Frequency	5G NR n77: 3450 MHz ~ 3550 MHz 5G NR n78: 3450 MHz ~ 3550 MHz
Bandwidth	20MHz / 30MHz / 40MHz / 50MHz / 60MHz / 70MHz / 80MHz / 90MHz / 100MHz
SCS	30kHz
Maximum Output Power to Antenna	<Ant. 2> 5G NR n77 : 23.33 dBm 5G NR n78 : 25.61 dBm <Ant. 4> 5G NR n78 : 24.29 dBm <Ant. 6> 5G NR n78 : 24.24 dBm <Ant. 7> 5G NR n78 : 23.67 dBm
Antenna Gain	<Ant. 2> 5G NR n77 : -3.4 dBi 5G NR n78 : -3.4 dBi <Ant. 4> 5G NR n78 : -4.5 dBi <Ant. 6> 5G NR n78 : -4.7 dBi <Ant. 7> 5G NR n78 : -4.2 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

Remark:

1. 5G NR n77/n78 supports SA and NSA mode. According to the maximum power between SA and NSA mode, SA covers NSA mode and 5G NR n78 covers 5G NR n77.
2. The device supports HPUE mode for 5G NR n78.
3. 5G NR n77 only support Ant.2, and n78 support antenna switch on Ant.2/4/6/7. Only the test data of worst Ant.2 is showed in the report according to the maximum power.
4. The EN-DC mode combination could be referred to the product spec.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum EIRP Power and Emission Designator

5G NR n77		PI/2 BPSK/QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
20	3460.02 ~ 3540.00	0.0935	18M2G7D	0.0608	18M2W7D
30	3465.00 ~ 3534.99	0.0951	27M8G7D	0.0649	27M9W7D
40	3470.01 ~ 3529.98	0.0984	37M8G7D	0.0667	37M8W7D
50	3475.02 ~ 3525.00	0.0933	47M5G7D	0.0632	47M5W7D
60	3480.00 ~ 3519.99	0.0931	58M0G7D	0.0638	57M8W7D
70	3485.01 ~ 3514.98	0.0910	67M5G7D	0.0622	67M4W7D
80	3490.02 ~ 3510.00	0.0906	77M5G7D	0.0598	77M5W7D
90	3495.00 ~ 3504.99	0.0893	87M3G7D	0.0625	87M5W7D
100	3500.01	0.0895	97M4G7D	0.0571	97M5W7D
5G NR n78		PI/2 BPSK/QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
20	3460.02 ~ 3540.00	0.1556	18M2G7D	0.1259	18M2W7D
30	3465.00 ~ 3534.99	0.1578	27M8G7D	0.1337	27M9W7D
40	3470.01 ~ 3529.98	0.1660	37M8G7D	0.1324	37M8W7D
50	3475.02 ~ 3525.00	0.1510	47M5G7D	0.1211	47M5W7D
60	3480.00 ~ 3519.99	0.1500	58M0G7D	0.1189	57M8W7D
70	3485.01 ~ 3514.98	0.1489	67M5G7D	0.1205	67M4W7D
80	3490.02 ~ 3510.00	0.1479	77M5G7D	0.1222	77M5W7D
90	3495.00 ~ 3504.99	0.1445	87M3G7D	0.1208	87M5W7D
100	3500.01	0.1663	97M4G7D	0.1169	97M5W7D

Note:

1. 5G NR Band n78 overlaps the entire frequency range of Band n77 for Part 27 Subpart Q. Therefore, the test results of conducted test items provided in this report covers Band n78 as well as Band n77.
2. For n77/n78, only the maximum EIRP of Ant. 2 is shown in the report.
3. All modulations have been evaluation, only the worst test results of PSK & QAM are shown in the report.

1.7 Testing Site

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH01-SZ	CN1256	421272

1.8 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24

1.9 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, Part 27 Subpart Q
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 Power Meas License Digital Systems D01 v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

1.10 Specification of Accessory

Specification of Accessory				
AC Adapter (US)	Brand Name	Motorola (Salcomp)	Model Name	MC-681L
AC Adapter (EU)	Brand Name	Motorola (Salcomp)	Model Name	MC-682L
AC Adapter (UK)	Brand Name	Motorola (Salcomp)	Model Name	MC-683L
AC Adapter (AU)	Brand Name	Motorola (Salcomp)	Model Name	MC-685L
AC Adapter (AR)	Brand Name	Motorola (Salcomp)	Model Name	MC-686L
AC Adapter (BR)	Brand Name	Motorola (Salcomp)	Model Name	MC-687L
AC Adapter (PRC)	Brand Name	Motorola (Salcomp)	Model Name	MC-688L
AC Adapter (CHILE)	Brand Name	Motorola (Salcomp)	Model Name	MC-689L
Battery 1	Brand Name	Motorola (ATL)	Model Name	NP44
Battery 2	Brand Name	Motorola (Sunwoda)	Model Name	NP44
Earphone 1	Brand Name	Motorola (Lyand)	Model Name	MD211(SH38D20195)
Earphone 2	Brand Name	Motorola (LCHSE)	Model Name	MD211(SH38D41948)
USB Cable	Brand Name	Motorola (Saibao)	Model Name	SC18D58980\SC18D24968
Type C to HDMI HDMI/ USBC Cable 1	Brand Name	Motorola (Linxee)	Model Name	SC18D02146
Type C to HDMI HDMI/ USBC Cable 2	Brand Name	Motorola (Linxee)	Model Name	SC18D38847

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.


Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Test Cases	Band	Bandwidth (MHz)	Modulation	RB #	Test Channel
		eg. 5M, 10M, 15M, 20M	eg. QPSK, 16QAM, 64QAM	1RB, Partial RB, Full RB	L/M/H
Max. Output Power	5G n77	20M, 30M, 40M, 50M, 60M, 70M, 80M, 90M, 100M	PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	1RB, Partial RB, Full RB	L, M, H
	5G n78	20M, 30M, 40M, 50M, 60M, 70M, 80M, 90M, 100M	PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	1RB, Partial RB, Full RB	L, M, H
Peak-to-Average Ratio	5G n78	20M	PI/2 BPSK, QPSK	1RB, Full RB	L, M, H
E.I.R.P	5G n77	20M, 30M, 40M, 50M, 60M, 70M, 80M, 90M, 100M	PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	1RB, Partial RB, Full RB	L, M, H
	5G n78	20M, 30M, 40M, 50M, 60M, 70M, 80M, 90M, 100M	PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	1RB, Partial RB, Full RB	L, M, H
26dB and 99% Bandwidth	5G n78	20M, 30M, 40M, 50M, 60M, 70M, 80M, 90M, 100M	PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	Full RB	M
Conducted Band Edge	5G n78	20M, 60M, 100M	PI/2 BPSK, QPSK	1RB, Full RB	L, H
Conducted Spurious Emission	5G n78	20M, 60M, 100M	PI/2 BPSK, QPSK	1RB	L, M, H
Frequency Stability	5G n78	20M	QPSK	Full RB	M
Radiated Spurious Emission	5G n78	Worst case from maximum power			M

Note:

1. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.
2. Based on engineering evaluation, only the worst modulations test results are shown in the report.
3. The n78 conducted and RSE test results cover n77 in this report.
4. Frequency Stability: Normal Voltage = 3.88V ; Low Voltage =3.4V.; High Voltage =4.2V

2.2 Connection Diagram of Test System

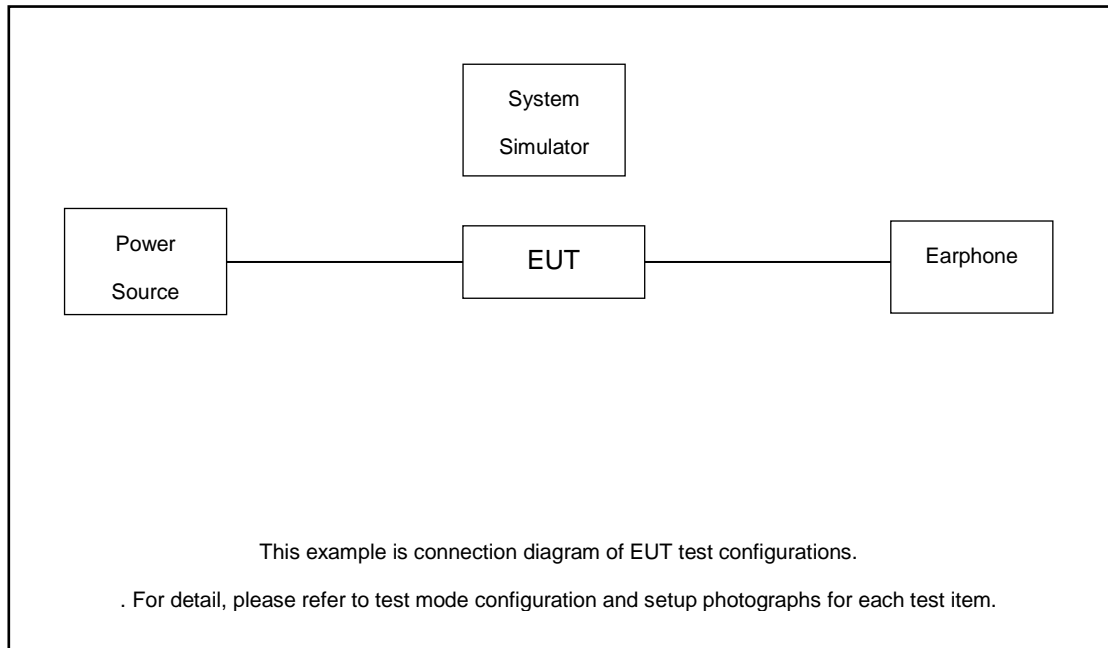

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8m
3.	Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5.57 dB and 10dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 5.57 + 10 = 15.57 \text{ (dB)} \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

5G n77/n78 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	-	633334	-
	Frequency	-	3500.01	-
90	Channel	633000	633334	633666
	Frequency	3495	3500.01	3504.99
80	Channel	632668	633334	634000
	Frequency	3490.02	3500.01	3510
70	Channel	632334	633334	634332
	Frequency	3485.01	3500.01	3514.98
60	Channel	632000	633334	634666
	Frequency	3480	3500.01	3519.99
50	Channel	631668	633334	635000
	Frequency	3475.02	3500.01	3525
40	Channel	631334	633334	635332
	Frequency	3470.01	3500.01	3529.98
30	Channel	631000	633334	635666
	Frequency	3465	3500.01	3534.99
20	Channel	630668	633334	636000
	Frequency	3460.02	3500.01	3540


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

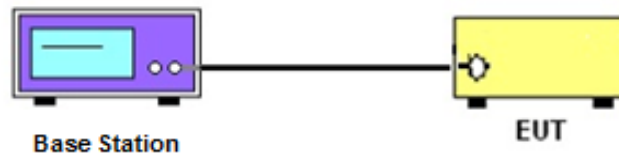

3.2.2 Peak-to-Average Ratio, Occupied / 26dB Bandwidth ,Band-Edge and Conducted Spurious Emission

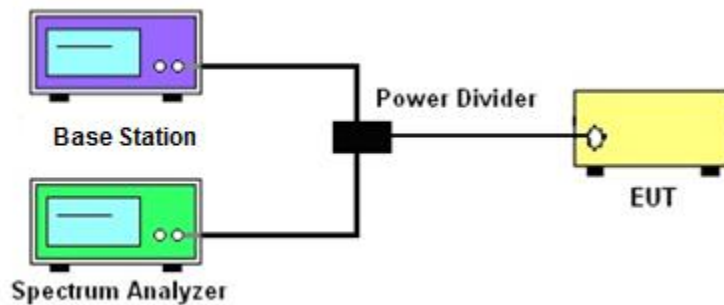

3.2.3 Frequency Stability

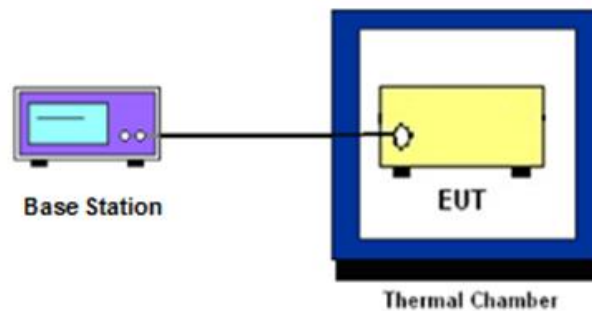

3.3 Test Result of Conducted Test

Please refer to Appendix A.



3.4 Conducted Output Power Measurement

3.4.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 EIRP

3.6.1 Description of EIRP Limit

§ 27.50 (k)(3)

Mobile devices are limited to 1Watt (30 dBm) EIRP. Mobile devices operating in these bands must employ a means for limiting power to the minimum necessary for successful communications

3.6.2 Test Procedures

1. According to KDB 412172 D01 Power Approach,
2. $EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where
 P_T = transmitter output power in dBm
 G_T = gain of the transmitting antenna in dBi
 L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.7 Occupied Bandwidth

3.7.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.8 Conducted Band Edge Measurement

3.8.1 Description of Conducted Band Edge Measurement

§ 27.53 (n)(2)

For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.

Compliance with this paragraph is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed, but limited to a maximum of 200 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq 1\%$ EBW but limited to a maximum of 200 kHz in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz and 5 MHz removed from the band edge, set RBW ≥ 500 KHz.
6. Beyond the 5 MHz removed from the band edge, set RBW = 1MHz.
7. Set spectrum analyzer with RMS detector.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. Checked that all the results comply with the emission limit line.

3.9 Conducted Spurious Emission Measurement

3.9.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges shall not exceed -13 dBm/MHz.

It is measured by means of a calibrated spectrum analyzer and scanned from 9 kHz up to a frequency including its 10th harmonic.

3.9.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. Checked that all the results comply with the emission limit line.

3.10 Frequency Stability Measurement

3.10.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

3.10.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.10.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5.
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

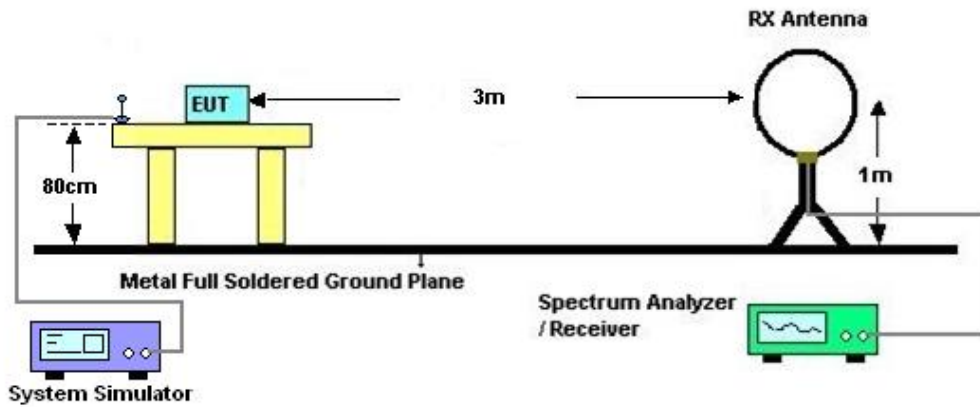

4.2.2 For radiated test from 30MHz to 1GHz

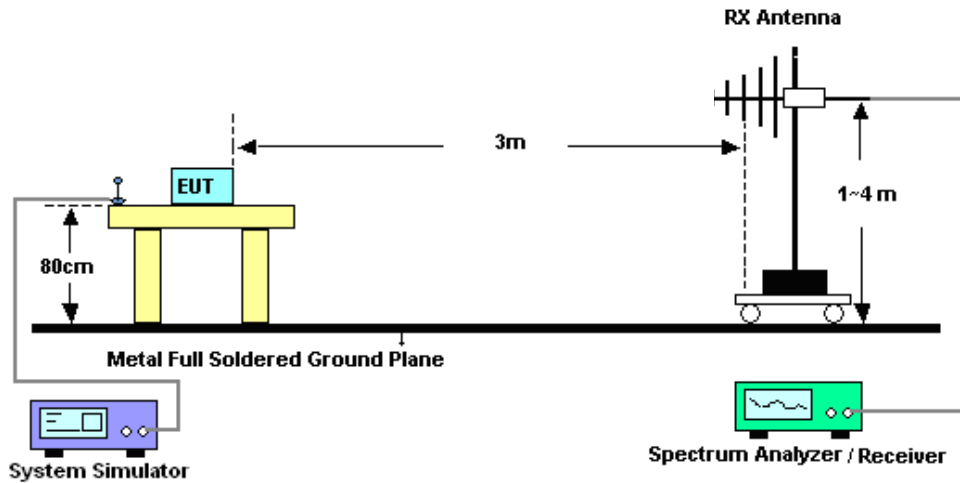

4.2.3 For radiated test above 1GHz

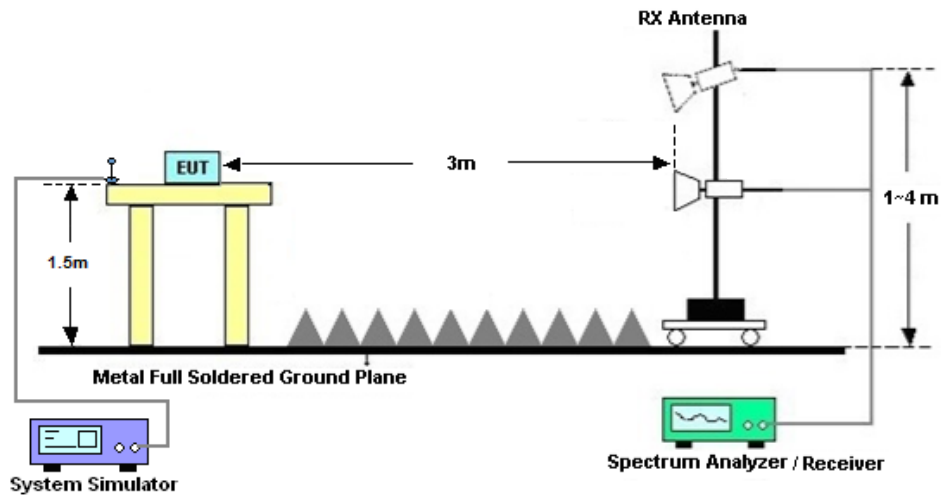

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Radiated Spurious Emission Measurement

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI/TIA-603-E. The power of any emission outside of the authorized operating frequency ranges shall not exceed -13 dBm/MHz.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
$$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$
$$\text{ERP (dBm)} = \text{EIRP} - 2.15$$
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 08, 2021	Jun. 07, 2022	Apr. 07, 2022	Conducted (TH01-SZ)
DC Power Supply	TTI	PL330P	290070	Max 32V , 3A	Oct. 25, 2021	Jun. 07, 2022	Oct. 24, 2022	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-04 265	60.06.020.007 7	0.4GHz~26.5GHz	Dec. 25, 2021	Jun. 07, 2022	Dec. 24, 2022	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Jul. 14, 2021	Jun. 07, 2022	Jul. 13, 2022	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec. 27, 2021	Jun. 15, 2022	Dec. 26, 2022	Radiation (03CH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010B	MY59071191	10Hz~44GHz	Apr. 06, 2022	Jun. 15, 2022	Apr. 05, 2023	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jun. 22, 2020	Jun. 15, 2022	Jun. 21, 2022	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Sep. 28, 2021	Jun. 15, 2022	Sep. 27, 2022	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 18, 2021	Jun. 15, 2022	Jul. 17, 2022	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 10, 2022	Jun. 15, 2022	Apr. 09, 2023	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 06, 2022	Jun. 15, 2022	Apr. 05, 2023	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P-R	1943528	1GHz~18GHz	Oct. 22, 2021	Jun. 15, 2022	Oct. 21, 2022	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5Ghz	Oct. 22, 2021	Jun. 15, 2022	Oct. 21, 2022	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35 -HG	1871923	18GHz~40GHz	Jul. 13, 2021	Jun. 15, 2022	Jul. 12, 2022	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	NCR	Jun. 15, 2022	NCR	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Jun. 15, 2022	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Jun. 15, 2022	NCR	Radiation (03CH01-SZ)

NCR: No Calibration Required



6 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±1.34 dB
Conducted Emissions	±1.34 dB
Occupied Channel Bandwidth	±0.13 %

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.48dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.53dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.02dB
---	--------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Jung Guo	Temperature :	22~23°C
		Relative Humidity :	40~42%

FR1 N77 (ANT2)

LTE Band: 41 (ANT0), LTE BW: 20M, LTE ARFCN: Mid

Transmitter Conducted Output Power And EIRP, ($G_T - L_C$)= -3.4dB

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
77	30	20	630668	3460.02	DFT-s-OFDM QPSK	1@1	23.09	19.69	0.0931
77	30	20	630668	3460.02	DFT-s-OFDM 16 QAM	1@1	21.21	17.81	0.0604
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	1@1	22.89	19.49	0.0889
77	30	20	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	21.11	17.71	0.0590
77	30	20	636000	3540	DFT-s-OFDM QPSK	1@1	23.11	19.71	0.0935
77	30	20	636000	3540	DFT-s-OFDM 16 QAM	1@1	21.24	17.84	0.0608
77	30	30	631000	3465	DFT-s-OFDM QPSK	1@1	23.18	19.78	0.0951
77	30	30	631000	3465	DFT-s-OFDM 16 QAM	1@1	21.41	18.01	0.0632
77	30	30	633334	3500.01	DFT-s-OFDM QPSK	1@1	23.14	19.74	0.0942
77	30	30	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	21.52	18.12	0.0649
77	30	30	635666	3534.99	DFT-s-OFDM QPSK	1@1	23.18	19.78	0.0951
77	30	30	635666	3534.99	DFT-s-OFDM 16 QAM	1@1	21.48	18.08	0.0643
77	30	40	631334	3470.01	DFT-s-OFDM QPSK	1@1	23.15	19.75	0.0944
77	30	40	631334	3470.01	DFT-s-OFDM 16 QAM	1@1	21.28	17.88	0.0614
77	30	40	633334	3500.01	DFT-s-OFDM QPSK	1@1	23.27	19.87	0.0971
77	30	40	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	21.54	18.14	0.0652
77	30	40	635332	3529.98	DFT-s-OFDM QPSK	1@1	23.33	19.93	0.0984
77	30	40	635332	3529.98	DFT-s-OFDM 16 QAM	1@1	21.64	18.24	0.0667
77	30	50	631668	3475.02	DFT-s-OFDM QPSK	1@1	22.99	19.59	0.0910
77	30	50	631668	3475.02	DFT-s-OFDM 16 QAM	1@1	21.22	17.82	0.0605
77	30	50	633334	3500.01	DFT-s-OFDM QPSK	1@1	23.01	19.61	0.0914
77	30	50	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	21.32	17.92	0.0619
77	30	50	635000	3525	DFT-s-OFDM QPSK	1@1	23.1	19.7	0.0933
77	30	50	635000	3525	DFT-s-OFDM 16 QAM	1@1	21.41	18.01	0.0632
77	30	60	632000	3480	DFT-s-OFDM QPSK	1@1	22.98	19.58	0.0908
77	30	60	632000	3480	DFT-s-OFDM 16 QAM	1@1	21.28	17.88	0.0614
77	30	60	633334	3500.01	DFT-s-OFDM QPSK	1@1	23.09	19.69	0.0931

77	30	60	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	21.45	18.05	0.0638
77	30	60	634666	3519.99	DFT-s-OFDM QPSK	1@1	22.98	19.58	0.0908
77	30	60	634666	3519.99	DFT-s-OFDM 16 QAM	1@1	21.45	18.05	0.0638
77	30	70	632334	3485.01	DFT-s-OFDM QPSK	1@1	22.95	19.55	0.0902
77	30	70	632334	3485.01	DFT-s-OFDM 16 QAM	1@1	21.13	17.73	0.0593
77	30	70	633334	3500.01	DFT-s-OFDM QPSK	1@1	22.98	19.58	0.0908
77	30	70	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	21.34	17.94	0.0622
77	30	70	634332	3514.98	DFT-s-OFDM QPSK	1@1	22.99	19.59	0.0910
77	30	70	634332	3514.98	DFT-s-OFDM 16 QAM	1@1	21.27	17.87	0.0612
77	30	80	632668	3490.02	DFT-s-OFDM QPSK	1@1	22.91	19.51	0.0893
77	30	80	632668	3490.02	DFT-s-OFDM 16 QAM	1@1	21.16	17.76	0.0597
77	30	80	633334	3500.01	DFT-s-OFDM QPSK	1@1	22.87	19.47	0.0885
77	30	80	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	21.03	17.63	0.0579
77	30	80	634000	3510	DFT-s-OFDM QPSK	1@1	22.97	19.57	0.0906
77	30	80	634000	3510	DFT-s-OFDM 16 QAM	1@1	21.17	17.77	0.0598
77	30	90	633000	3495	DFT-s-OFDM QPSK	1@1	22.91	19.51	0.0893
77	30	90	633000	3495	DFT-s-OFDM 16 QAM	1@1	21.36	17.96	0.0625
77	30	90	633334	3500.01	DFT-s-OFDM QPSK	1@1	22.85	19.45	0.0881
77	30	90	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	21.08	17.68	0.0586
77	30	90	633666	3504.99	DFT-s-OFDM QPSK	1@1	22.87	19.47	0.0885
77	30	90	633666	3504.99	DFT-s-OFDM 16 QAM	1@1	21.19	17.79	0.0601
77	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	135@67	22.84	19.44	0.0879
77	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	22.9	19.5	0.0891
77	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@271	22.73	19.33	0.0857
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	135@67	22.92	19.52	0.0895
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@1	22.84	19.44	0.0879
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@271	22.7	19.3	0.0851
77	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	135@67	20.84	17.44	0.0555
77	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	20.97	17.57	0.0571
77	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	1@271	20.88	17.48	0.0560
77	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	135@67	19.32	15.92	0.0391
77	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	1@1	19.38	15.98	0.0396
77	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	1@271	19.3	15.9	0.0389
77	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	135@67	17.33	13.93	0.0247

77	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	1@1	17.13	13.73	0.0236
77	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	1@271	16.88	13.48	0.0223
77	30	100	633334	3500.01	CP-OFDM QPSK	137@68	20.34	16.94	0.0494
77	30	100	633334	3500.01	CP-OFDM QPSK	1@1	20.34	16.94	0.0494
77	30	100	633334	3500.01	CP-OFDM QPSK	1@271	20.26	16.86	0.0485

FR1 N78 (ANT2)

Transmitter Conducted Output Power And EIRP, (G_T - L_C)= -3.4dB

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
78	30	20	630668	3460.02	DFT-s-OFDM QPSK	1@1	25.06	21.66	0.1466
78	30	20	630668	3460.02	DFT-s-OFDM 16 QAM	1@1	24.21	20.81	0.1205
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.23	21.83	0.1524
78	30	20	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.24	20.84	0.1213
78	30	20	636000	3540	DFT-s-OFDM QPSK	1@1	25.32	21.92	0.1556
78	30	20	636000	3540	DFT-s-OFDM 16 QAM	1@1	24.4	21	0.1259
78	30	30	631000	3465	DFT-s-OFDM QPSK	1@1	25.12	21.72	0.1486
78	30	30	631000	3465	DFT-s-OFDM 16 QAM	1@1	24.24	20.84	0.1213
78	30	30	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.2	21.8	0.1514
78	30	30	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.45	21.05	0.1274
78	30	30	635666	3534.99	DFT-s-OFDM QPSK	1@1	25.38	21.98	0.1578
78	30	30	635666	3534.99	DFT-s-OFDM 16 QAM	1@1	24.66	21.26	0.1337
78	30	40	631334	3470.01	DFT-s-OFDM QPSK	1@1	25.18	21.78	0.1507
78	30	40	631334	3470.01	DFT-s-OFDM 16 QAM	1@1	24.33	20.93	0.1239
78	30	40	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.41	22.01	0.1589
78	30	40	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.58	21.18	0.1312
78	30	40	635332	3529.98	DFT-s-OFDM QPSK	1@1	25.6	22.2	0.1660
78	30	40	635332	3529.98	DFT-s-OFDM 16 QAM	1@1	24.62	21.22	0.1324
78	30	50	631668	3475.02	DFT-s-OFDM QPSK	1@1	24.72	21.32	0.1355
78	30	50	631668	3475.02	DFT-s-OFDM 16 QAM	1@1	24.04	20.64	0.1159
78	30	50	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.02	21.62	0.1452
78	30	50	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.09	20.69	0.1172
78	30	50	635000	3525	DFT-s-OFDM QPSK	1@1	25.19	21.79	0.1510
78	30	50	635000	3525	DFT-s-OFDM 16 QAM	1@1	24.23	20.83	0.1211
78	30	60	632000	3480	DFT-s-OFDM QPSK	1@1	25.03	21.63	0.1455
78	30	60	632000	3480	DFT-s-OFDM 16 QAM	1@1	24.07	20.67	0.1167
78	30	60	633334	3500.01	DFT-s-OFDM QPSK	1@1	25	21.6	0.1445
78	30	60	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.15	20.75	0.1189
78	30	60	634666	3519.99	DFT-s-OFDM QPSK	1@1	25.16	21.76	0.1500

78	30	60	634666	3519.99	DFT-s-OFDM 16 QAM	1@1	24.15	20.75	0.1189
78	30	70	632334	3485.01	DFT-s-OFDM QPSK	1@1	25.13	21.73	0.1489
78	30	70	632334	3485.01	DFT-s-OFDM 16 QAM	1@1	24.07	20.67	0.1167
78	30	70	633334	3500.01	DFT-s-OFDM QPSK	1@1	25	21.6	0.1445
78	30	70	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.19	20.79	0.1199
78	30	70	634332	3514.98	DFT-s-OFDM QPSK	1@1	25.05	21.65	0.1462
78	30	70	634332	3514.98	DFT-s-OFDM 16 QAM	1@1	24.21	20.81	0.1205
78	30	80	632668	3490.02	DFT-s-OFDM QPSK	1@1	25.09	21.69	0.1476
78	30	80	632668	3490.02	DFT-s-OFDM 16 QAM	1@1	24.27	20.87	0.1222
78	30	80	633334	3500.01	DFT-s-OFDM QPSK	1@1	24.91	21.51	0.1416
78	30	80	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.1	20.7	0.1175
78	30	80	634000	3510	DFT-s-OFDM QPSK	1@1	25.1	21.7	0.1479
78	30	80	634000	3510	DFT-s-OFDM 16 QAM	1@1	24.19	20.79	0.1199
78	30	90	633000	3495	DFT-s-OFDM QPSK	1@1	24.98	21.58	0.1439
78	30	90	633000	3495	DFT-s-OFDM 16 QAM	1@1	24.15	20.75	0.1189
78	30	90	633334	3500.01	DFT-s-OFDM QPSK	1@1	24.95	21.55	0.1429
78	30	90	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.05	20.65	0.1161
78	30	90	633666	3504.99	DFT-s-OFDM QPSK	1@1	25	21.6	0.1445
78	30	90	633666	3504.99	DFT-s-OFDM 16 QAM	1@1	24.22	20.82	0.1208
78	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	135@67	25.07	21.67	0.1469
78	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	24.95	21.55	0.1429
78	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@271	24.88	21.48	0.1406
78	30	100	633334	3500.01	DFT-s-OFDM QPSK	135@67	25.05	21.65	0.1462
78	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.61	22.21	0.1663
78	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@271	24.93	21.53	0.1422
78	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	135@67	24.06	20.66	0.1164
78	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.08	20.68	0.1169
78	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	1@271	23.98	20.58	0.1143
78	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	135@67	22.59	19.19	0.0830
78	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	1@1	22.52	19.12	0.0817
78	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	1@271	22.37	18.97	0.0789
78	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	135@67	20.52	17.12	0.0515
78	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	1@1	20.28	16.88	0.0488
78	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	1@271	20.32	16.92	0.0492

78	30	100	633334	3500.01	CP-OFDM QPSK	137@68	23.57	20.17	0.1040
78	30	100	633334	3500.01	CP-OFDM QPSK	1@1	23.43	20.03	0.1007
78	30	100	633334	3500.01	CP-OFDM QPSK	1@271	23.42	20.02	0.1005

Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.00599	PASS	NV
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.00627	PASS	LV
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.00364	PASS	HV
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.00384	PASS	-30°C
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.00676	PASS	-20°C
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.00433	PASS	-10°C
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.00643	PASS	0°C
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.00474	PASS	10°C
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.00026	PASS	20°C
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.00445	PASS	30°C
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.00521	PASS	40°C
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.00047	PASS	50°C

Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
78	30	20	630668	3460.02	DFT-s-OFDM PI/2 BPSK	50@0	7.2	13	PASS
78	30	20	630668	3460.02	DFT-s-OFDM PI/2 BPSK	1@0	7.83	13	PASS
78	30	20	630668	3460.02	DFT-s-OFDM QPSK	50@0	8.2	13	PASS
78	30	20	630668	3460.02	DFT-s-OFDM QPSK	1@0	8.87	13	PASS
78	30	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	50@0	7.25	13	PASS
78	30	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@0	7.59	13	PASS
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	8.41	13	PASS
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	1@0	8.46	13	PASS
78	30	20	636000	3540.0	DFT-s-OFDM PI/2 BPSK	50@0	7.24	13	PASS
78	30	20	636000	3540.0	DFT-s-OFDM PI/2 BPSK	1@0	8.04	13	PASS
78	30	20	636000	3540.0	DFT-s-OFDM QPSK	50@0	8.37	13	PASS
78	30	20	636000	3540.0	DFT-s-OFDM QPSK	1@0	8.55	13	PASS


N78(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Low_CH



N78(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Low_CH




N78(20M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH

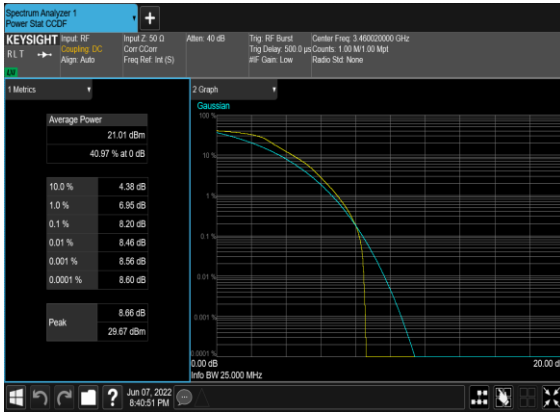


N78(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH



N78(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

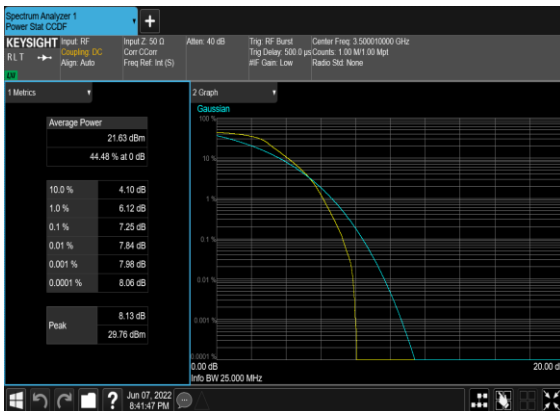


N78(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Mid_CH

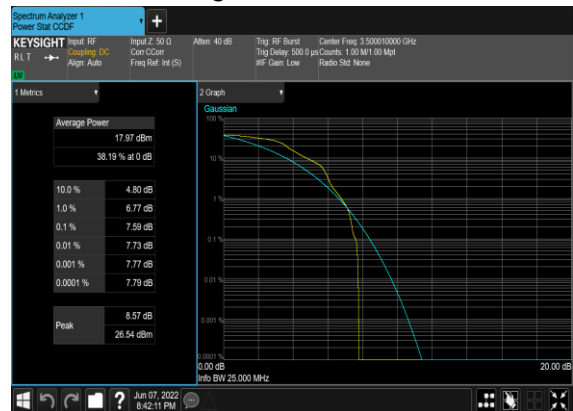

N78(20M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH




N78(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

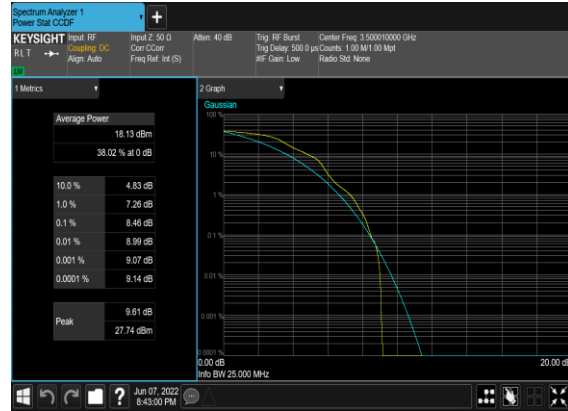


N78(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_High_CH




N78(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_High_CH

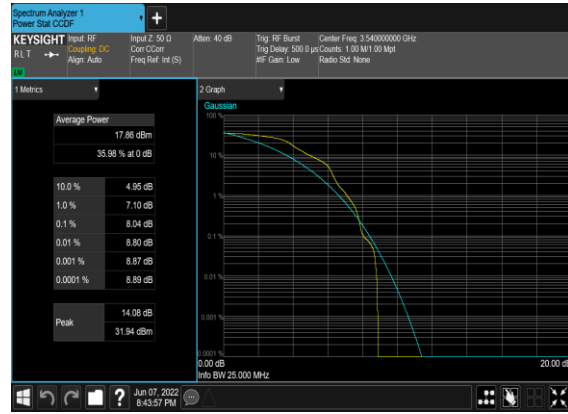

N78(20M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH

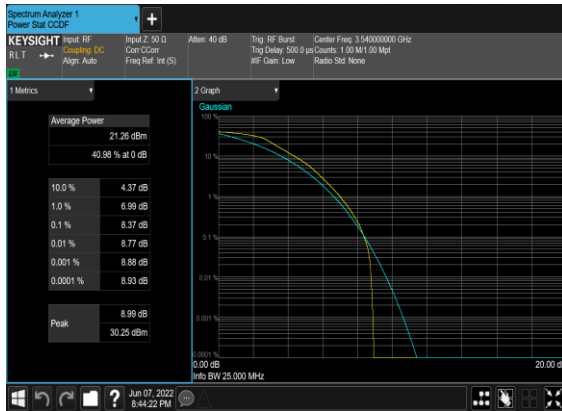

N78(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

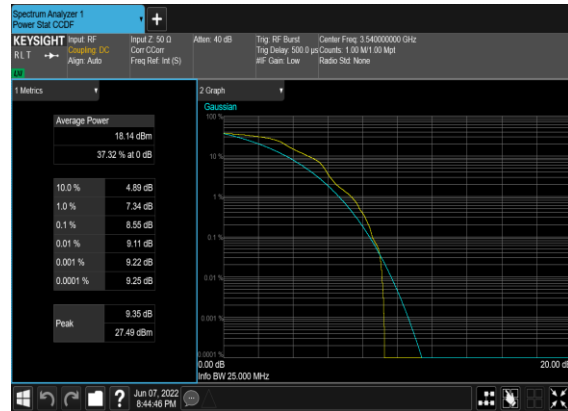


Occupied Bandwidth

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB OBW (MHz)
78	30	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	50@0	17.776	19.05
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	17.823	19.12
78	30	20	633334	3500.01	CP-OFDM QPSK	51@0	18.2	19.46
78	30	20	633334	3500.01	CP-OFDM 16 QAM	51@0	18.221	19.28
78	30	20	633334	3500.01	CP-OFDM 64 QAM	51@0	18.189	19.13
78	30	20	633334	3500.01	CP-OFDM 256 QAM	51@0	18.154	19.27
78	30	30	633334	3500.01	DFT-s-OFDM PI/2 BPSK	75@0	26.77	28.24
78	30	30	633334	3500.01	DFT-s-OFDM QPSK	75@0	26.725	28.14
78	30	30	633334	3500.01	CP-OFDM QPSK	78@0	27.803	29.21
78	30	30	633334	3500.01	CP-OFDM 16 QAM	78@0	27.831	29.04
78	30	30	633334	3500.01	CP-OFDM 64 QAM	78@0	27.85	29.34
78	30	30	633334	3500.01	CP-OFDM 256 QAM	78@0	27.858	29.22
78	30	40	633334	3500.01	DFT-s-OFDM PI/2 BPSK	100@0	35.731	37.31
78	30	40	633334	3500.01	DFT-s-OFDM QPSK	100@0	35.711	37.27
78	30	40	633334	3500.01	CP-OFDM QPSK	106@0	37.802	39.46
78	30	40	633334	3500.01	CP-OFDM 16 QAM	106@0	37.834	39.32
78	30	40	633334	3500.01	CP-OFDM 64 QAM	106@0	37.812	39.32
78	30	40	633334	3500.01	CP-OFDM 256 QAM	106@0	37.806	39.46
78	30	50	633334	3500.01	DFT-s-OFDM PI/2 BPSK	128@0	45.712	47.58
78	30	50	633334	3500.01	DFT-s-OFDM QPSK	128@0	45.804	47.48
78	30	50	633334	3500.01	CP-OFDM QPSK	133@0	47.498	49.41
78	30	50	633334	3500.01	CP-OFDM 16 QAM	133@0	47.503	49.26
78	30	50	633334	3500.01	CP-OFDM 64 QAM	133@0	47.51	49.25
78	30	50	633334	3500.01	CP-OFDM 256 QAM	133@0	47.475	49.18
78	30	60	633334	3500.01	DFT-s-OFDM PI/2 BPSK	162@0	57.953	59.79


78	30	60	633334	3500.01	DFT-s-OFDM QPSK	162@0	57.872	59.95
78	30	60	633334	3500.01	CP-OFDM QPSK	162@0	57.759	59.87
78	30	60	633334	3500.01	CP-OFDM 16 QAM	162@0	57.713	59.94
78	30	60	633334	3500.01	CP-OFDM 64 QAM	162@0	57.828	59.8
78	30	60	633334	3500.01	CP-OFDM 256 QAM	162@0	57.776	59.76
78	30	70	633334	3500.01	DFT-s-OFDM PI/2 BPSK	180@0	64.289	66.52
78	30	70	633334	3500.01	DFT-s-OFDM QPSK	180@0	64.247	66.52
78	30	70	633334	3500.01	CP-OFDM QPSK	189@0	67.495	69.86
78	30	70	633334	3500.01	CP-OFDM 16 QAM	189@0	67.337	69.74
78	30	70	633334	3500.01	CP-OFDM 64 QAM	189@0	67.425	69.67
78	30	70	633334	3500.01	CP-OFDM 256 QAM	189@0	67.439	69.69
78	30	80	633334	3500.01	DFT-s-OFDM PI/2 BPSK	216@0	77.09	79.87
78	30	80	633334	3500.01	DFT-s-OFDM QPSK	216@0	77.117	79.74
78	30	80	633334	3500.01	CP-OFDM QPSK	217@0	77.484	80.0
78	30	80	633334	3500.01	CP-OFDM 16 QAM	217@0	77.492	80.09
78	30	80	633334	3500.01	CP-OFDM 64 QAM	217@0	77.421	80.11
78	30	80	633334	3500.01	CP-OFDM 256 QAM	217@0	77.427	79.97
78	30	90	633334	3500.01	DFT-s-OFDM PI/2 BPSK	240@0	85.722	88.46
78	30	90	633334	3500.01	DFT-s-OFDM QPSK	240@0	85.711	88.54
78	30	90	633334	3500.01	CP-OFDM QPSK	245@0	87.305	90.28
78	30	90	633334	3500.01	CP-OFDM 16 QAM	245@0	87.388	90.32
78	30	90	633334	3500.01	CP-OFDM 64 QAM	245@0	87.419	90.48
78	30	90	633334	3500.01	CP-OFDM 256 QAM	245@0	87.521	90.32
78	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	270@0	96.456	99.5
78	30	100	633334	3500.01	DFT-s-OFDM QPSK	270@0	96.419	99.39
78	30	100	633334	3500.01	CP-OFDM QPSK	273@0	97.368	100.6
78	30	100	633334	3500.01	CP-OFDM 16 QAM	273@0	97.422	100.6

78	30	100	633334	3500.01	CP-OFDM 64 QAM	273@0	97.243	100.5
78	30	100	633334	3500.01	CP-OFDM 256 QAM	273@0	97.534	100.5


N78(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

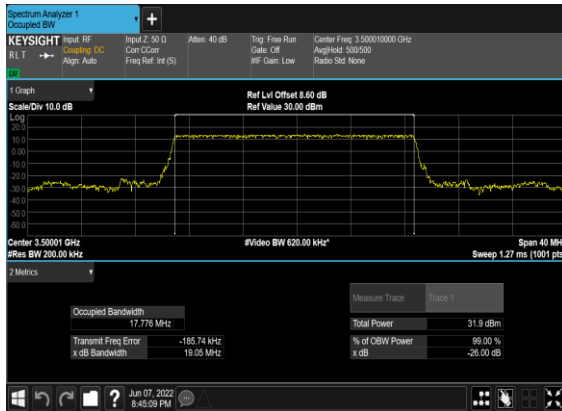


N78(20M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

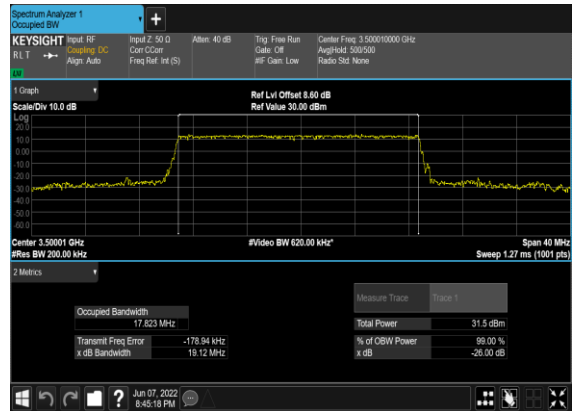


N78(20M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

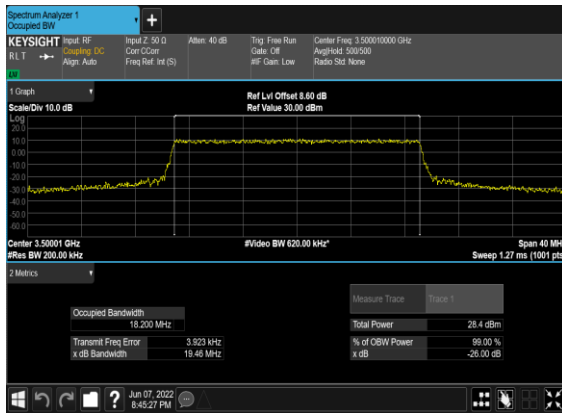


N78(20M)_CP-OFDM_16QAM_Outer_Full_Mid_CH

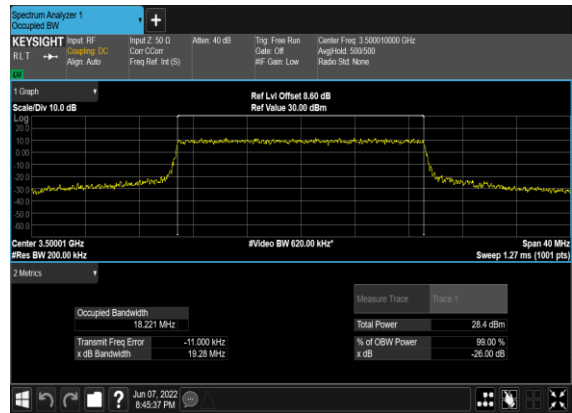


N78(20M)_CP-OFDM_64QAM_Outer_Full_Mid_CH

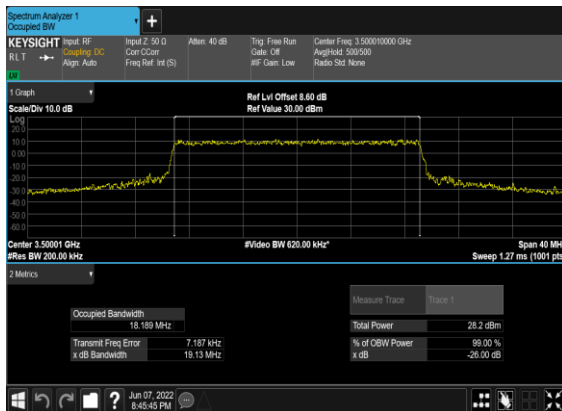


N78(20M)_CP-OFDM_256QAM_Outer_Full_Mid_CH

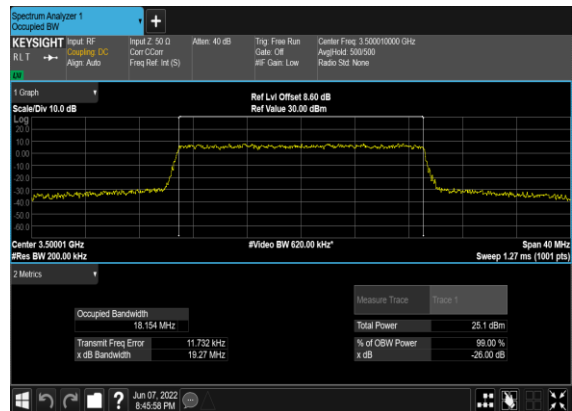


N78(30M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

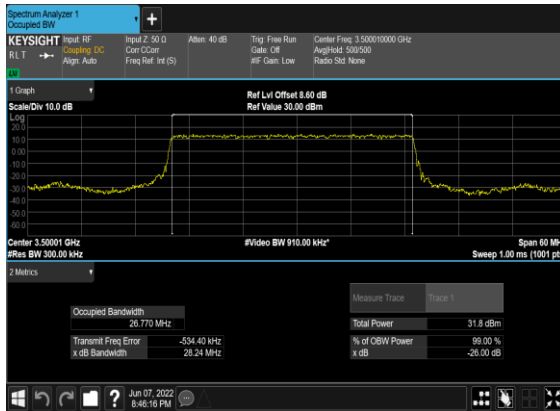


N78(30M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

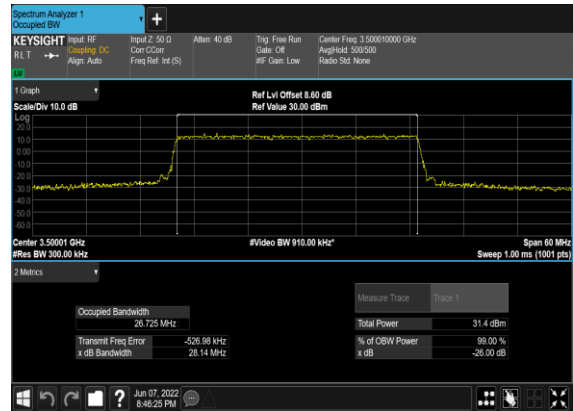


N78(30M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

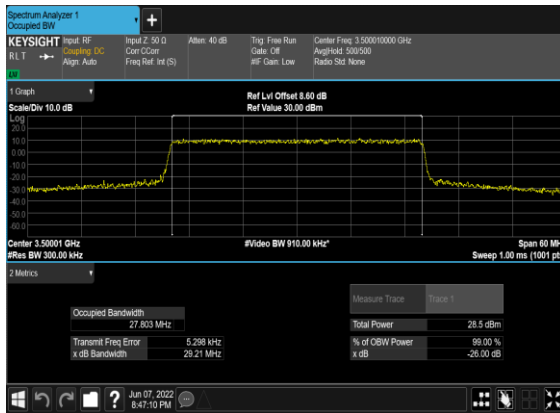


N78(30M)_CP-OFDM_16QAM_Outer_Full_Mid_CH

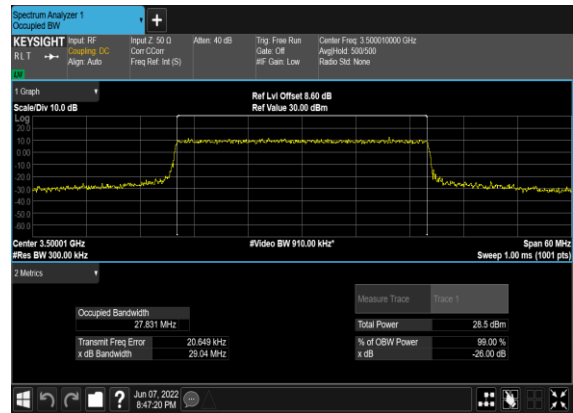


N78(30M)_CP-OFDM_64QAM_Outer_Full_Mid_CH

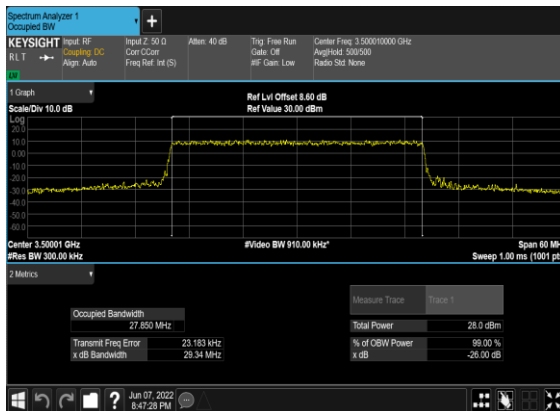


N78(30M)_CP-OFDM_256QAM_Outer_Full_Mid_CH

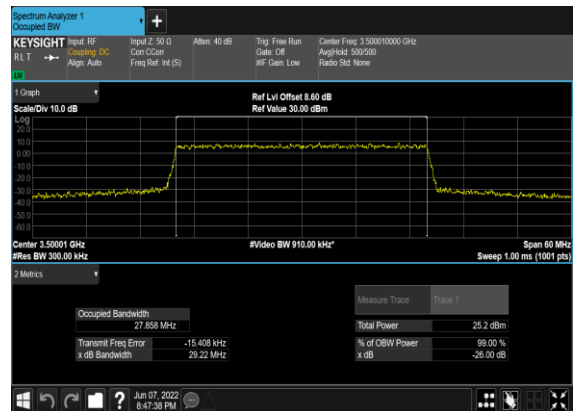


N78(40M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

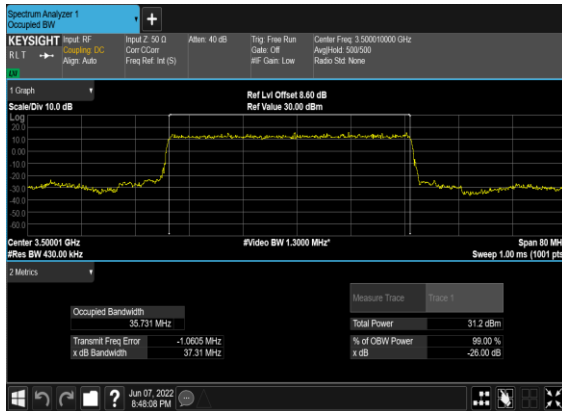


N78(40M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

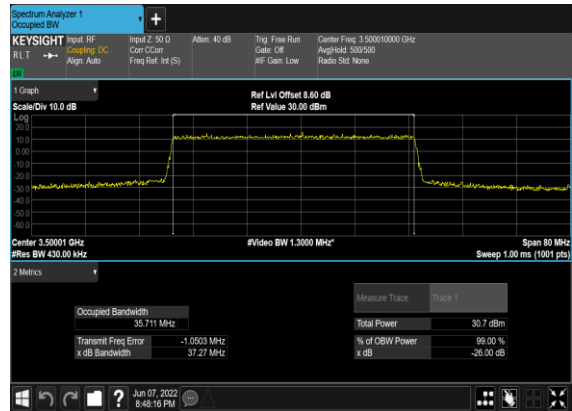


N78(40M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

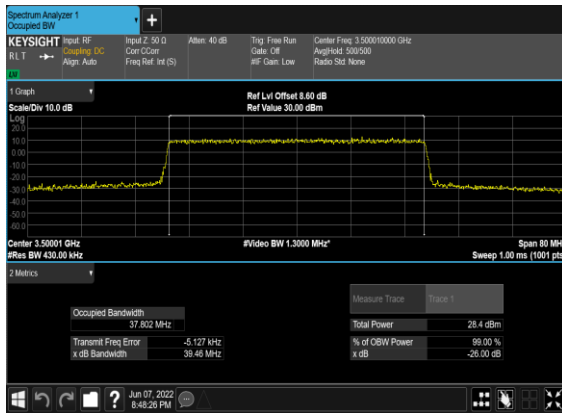


N78(40M)_CP-OFDM_16QAM_Outer_Full_Mid_CH

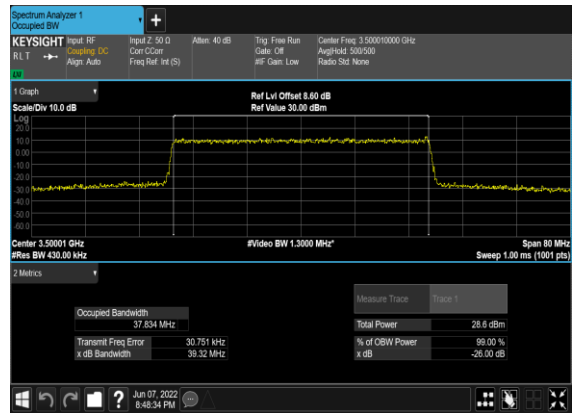


N78(40M)_CP-OFDM_64QAM_Outer_Full_Mid_CH

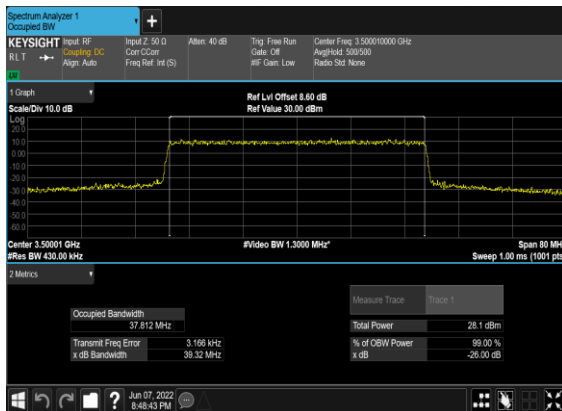


N78(40M)_CP-OFDM_256QAM_Outer_Full_Mid_CH

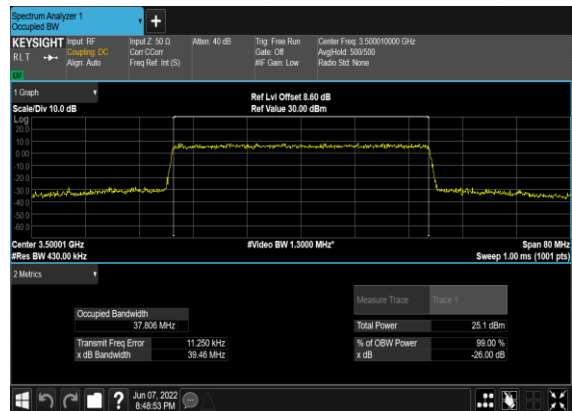


N78(50M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

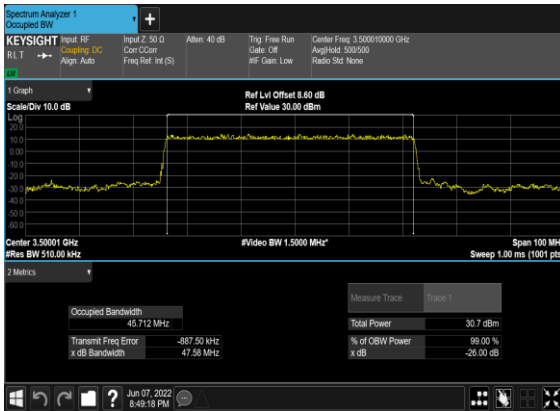


N78(50M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

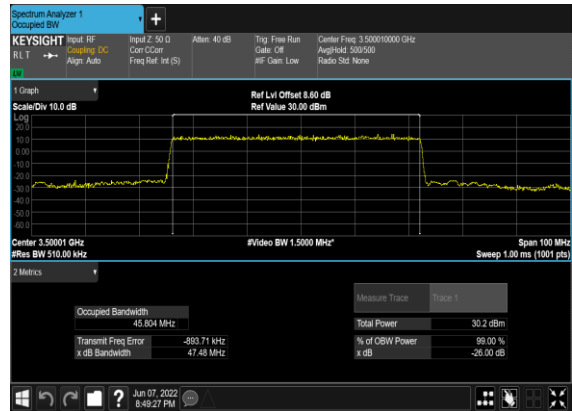


N78(50M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

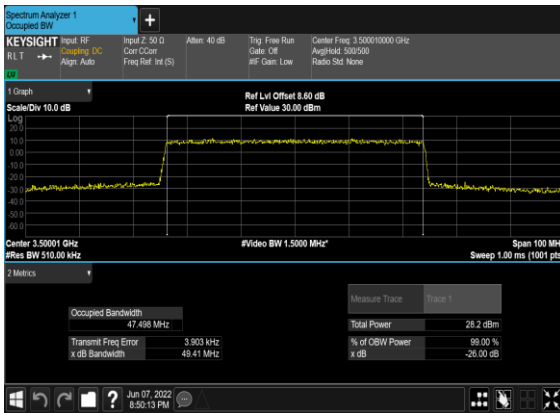


N78(50M)_CP-OFDM_16QAM_Outer_Full_Mid_CH

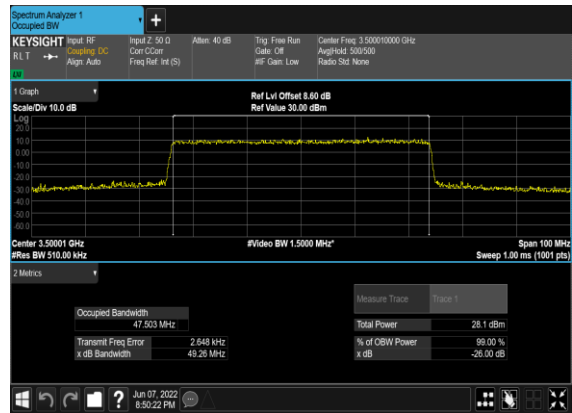


N78(50M)_CP-OFDM_64QAM_Outer_Full_Mid_CH

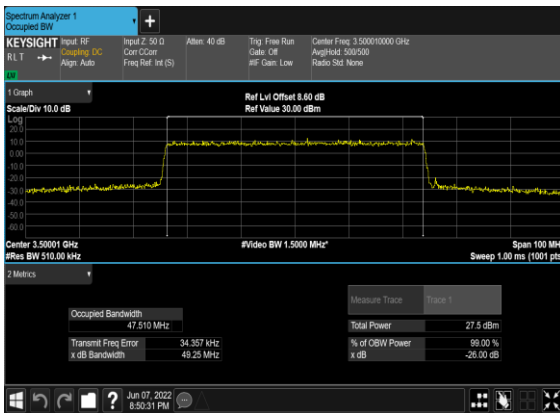


N78(50M)_CP-OFDM_256QAM_Outer_Full_Mid_CH

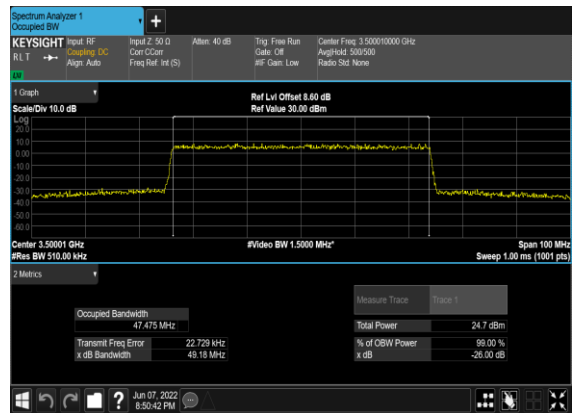


N78(60M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

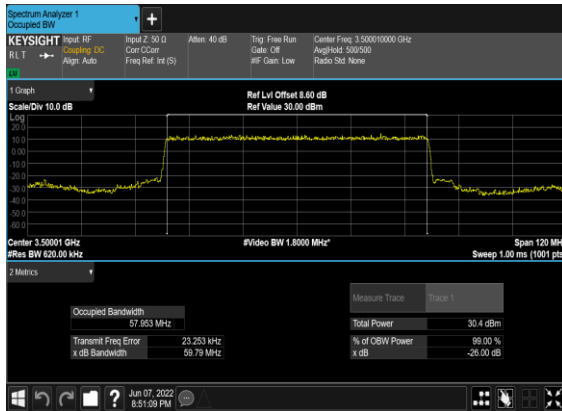


N78(60M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

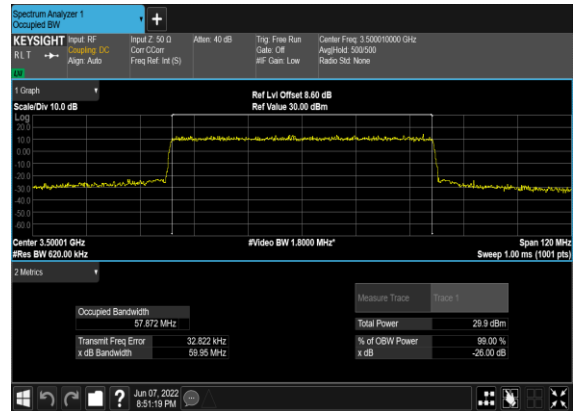


N78(60M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

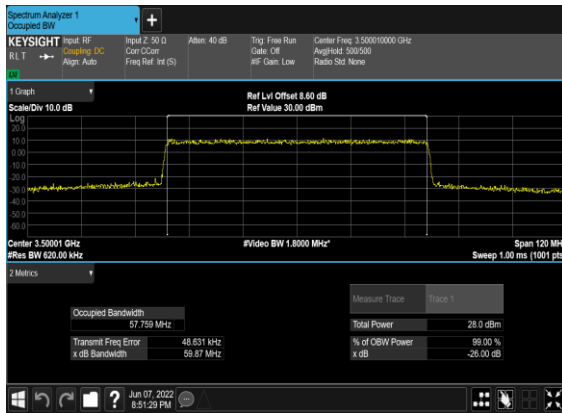


N78(60M)_CP-OFDM_16QAM_Outer_Full_Mid_CH

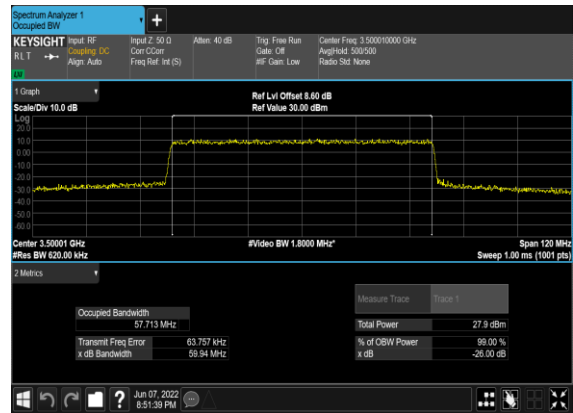


N78(60M)_CP-OFDM_64QAM_Outer_Full_Mid_CH

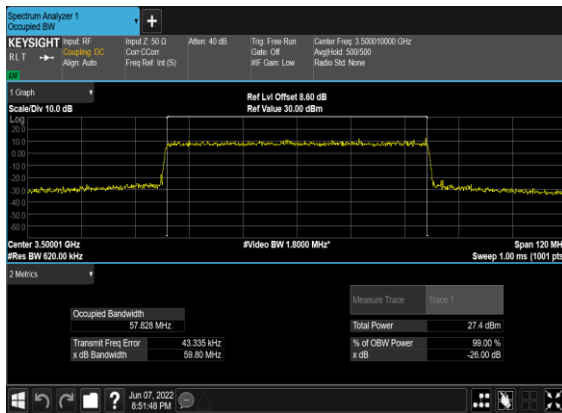


N78(60M)_CP-OFDM_256QAM_Outer_Full_Mid_CH

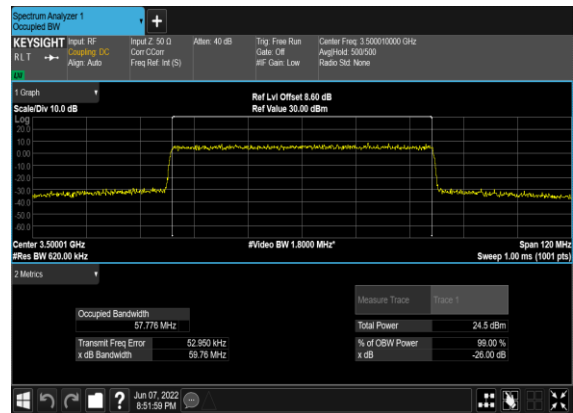

N78(70M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

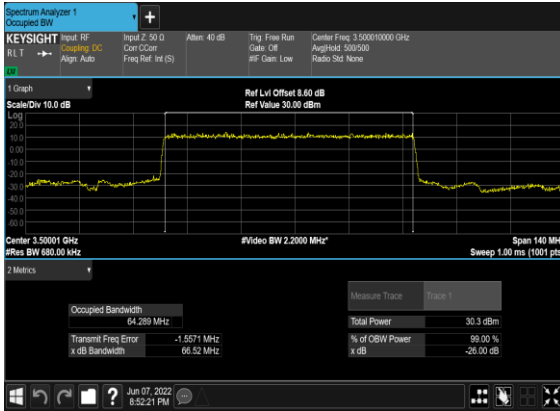

N78(70M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

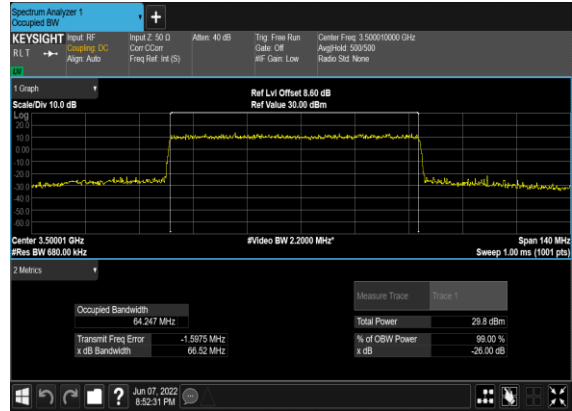


N78(70M)_CP-OFDM_QPSK_Outer_Full_Mid_CH




N78(70M)_CP-OFDM_16QAM_Outer_Full_Mid_CH




N78(70M)_CP-OFDM_64QAM_Outer_Full_Mid_CH

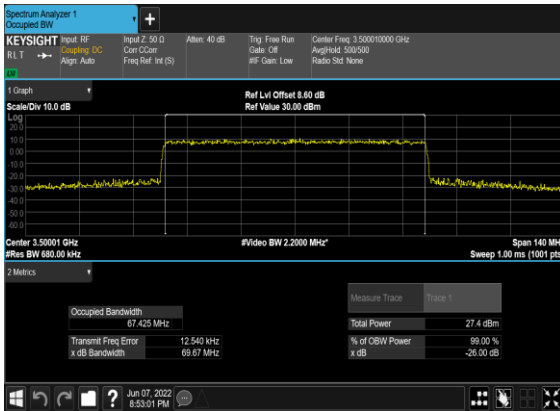


N78(70M)_CP-OFDM_256QAM_Outer_Full_Mid_CH

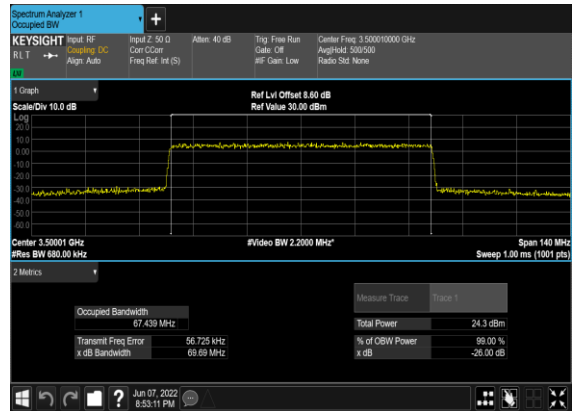


N78(80M)_DFT-s-OFDM_PI_2- BPSK_Outer_Full_Mid_CH

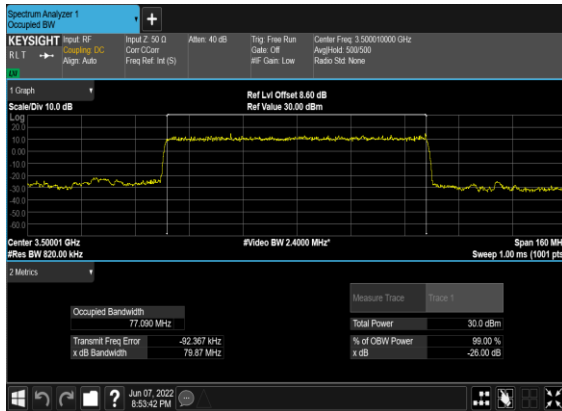


N78(80M)_DFT-s- OFDM_QPSK_Outer_Full_Mid_CH

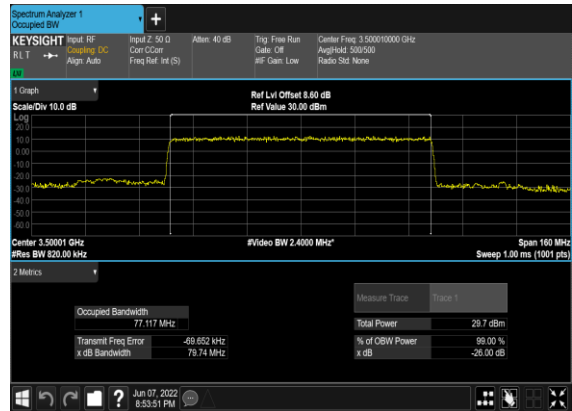


N78(80M)_CP- OFDM_QPSK_Outer_Full_Mid_CH

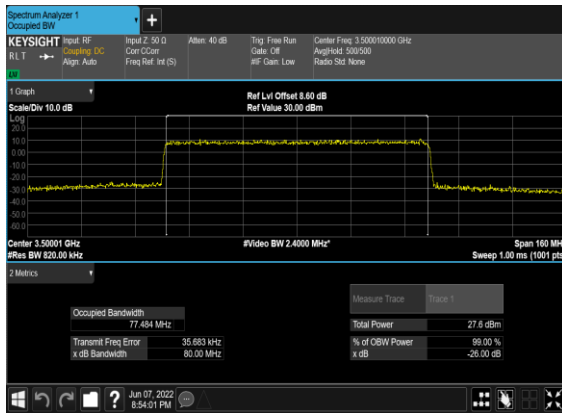


N78(80M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

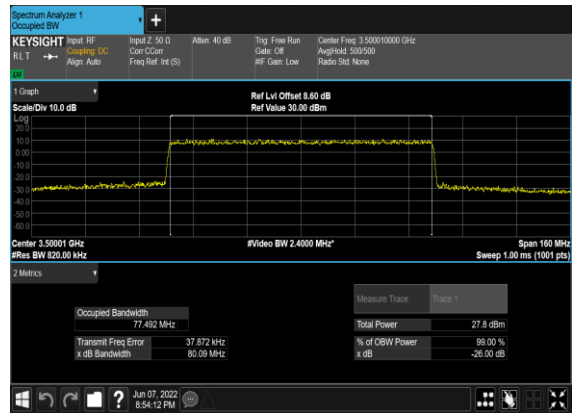


N78(80M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

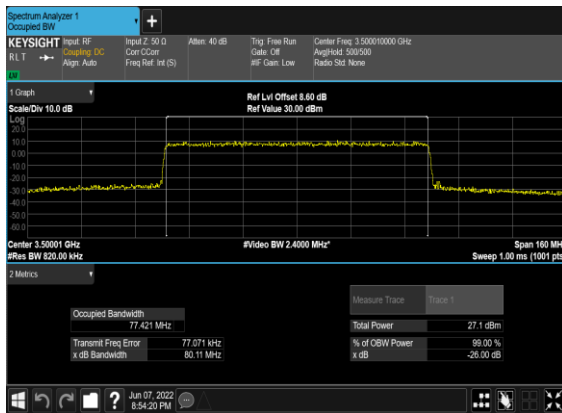


N78(80M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

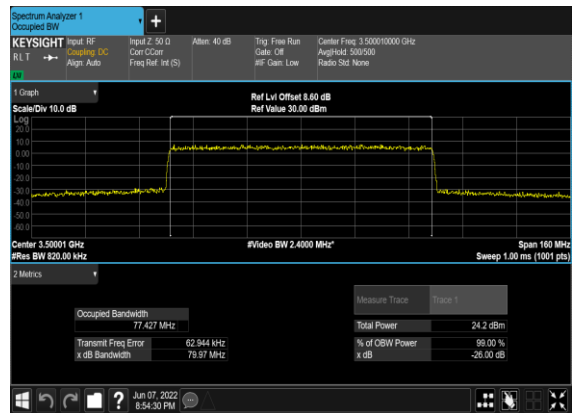


N78(90M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH

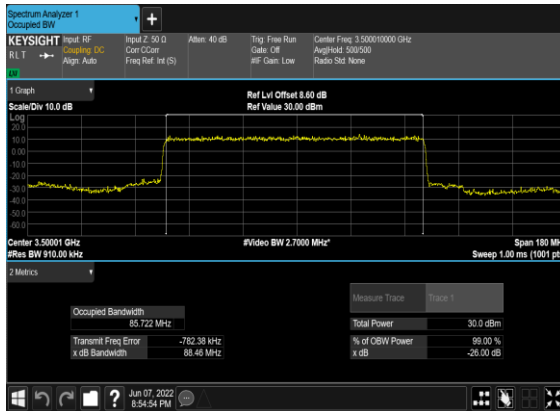


N78(90M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

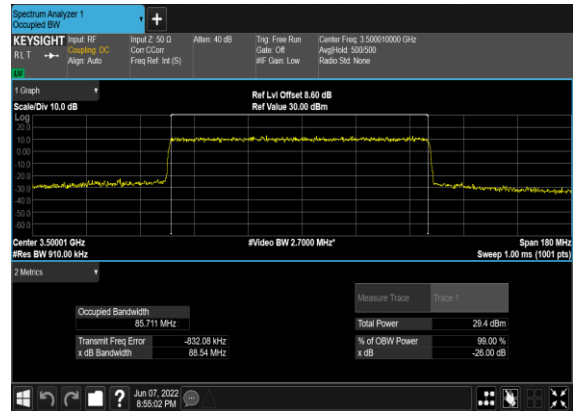


N78(90M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

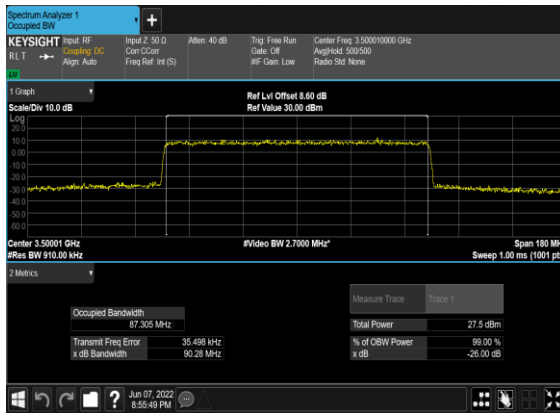


N78(90M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

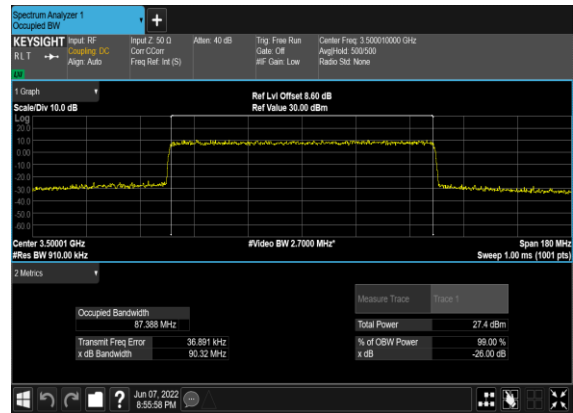


N78(90M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

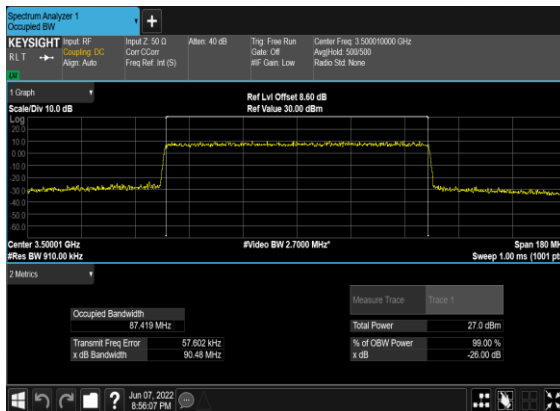


N78(90M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

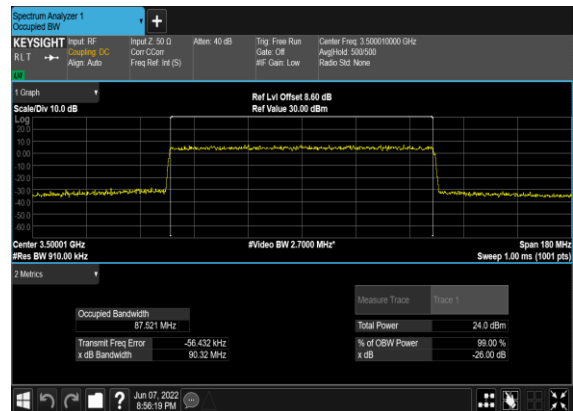


N78(100M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH

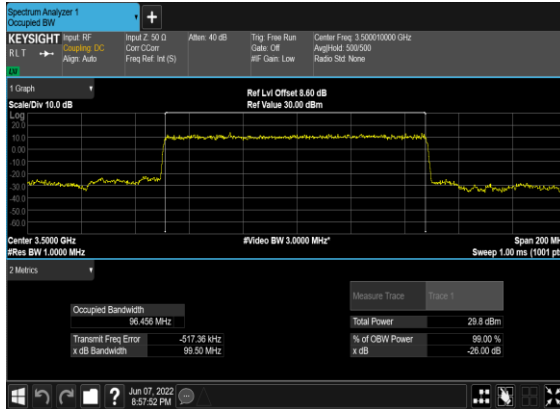

N78(100M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

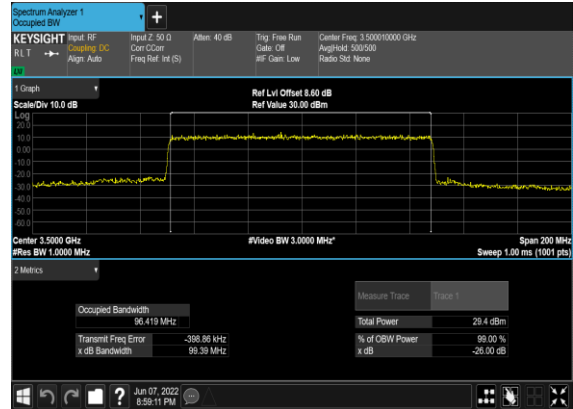


N78(100M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

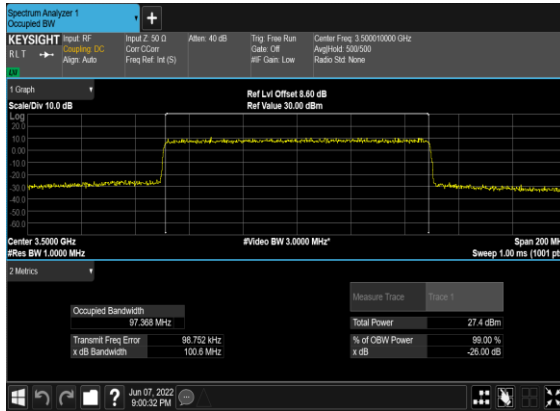


N78(100M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH



N78(100M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

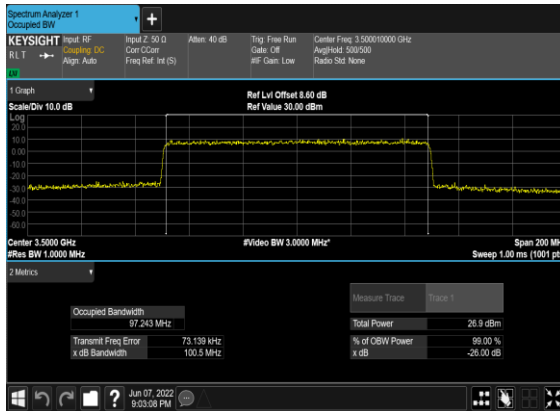

N78(100M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

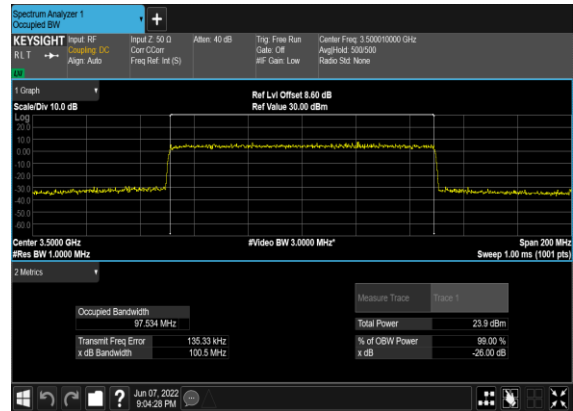


Conducted Spurious Emissions


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
78	30	20	630668	3460.02	DFT-s-OFDM BPSK	1@0	see graph	---
78	30	20	630668	3460.02	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	20	630668	3460.02	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	20	630668	3460.02	DFT-s-OFDM QPSK	1@0	see graph	---
78	30	20	630668	3460.02	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	20	630668	3460.02	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	20	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	---
78	30	20	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	20	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	---
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	20	636000	3540.0	DFT-s-OFDM BPSK	1@0	see graph	---
78	30	20	636000	3540.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	20	636000	3540.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	20	636000	3540.0	DFT-s-OFDM QPSK	1@0	see graph	---
78	30	20	636000	3540.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	20	636000	3540.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	60	632000	3480.0	DFT-s-OFDM BPSK	1@0	see graph	---
78	30	60	632000	3480.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	60	632000	3480.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	60	632000	3480.0	DFT-s-OFDM QPSK	1@0	see graph	---

78	30	60	632000	3480.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	60	632000	3480.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	60	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	---
78	30	60	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	60	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	60	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	---
78	30	60	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	60	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	60	634666	3519.99	DFT-s-OFDM BPSK	1@0	see graph	---
78	30	60	634666	3519.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	60	634666	3519.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	60	634666	3519.99	DFT-s-OFDM QPSK	1@0	see graph	---
78	30	60	634666	3519.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	60	634666	3519.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	---
78	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	---
78	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS


N78(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

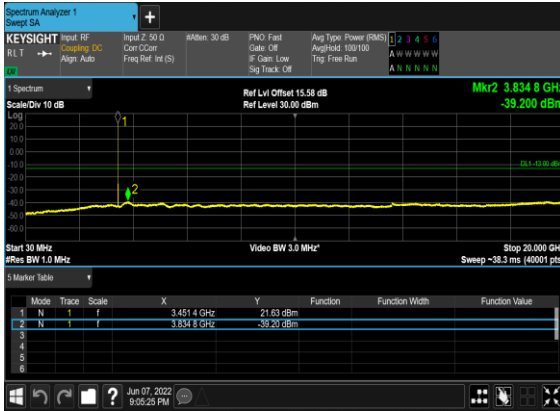


N78(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

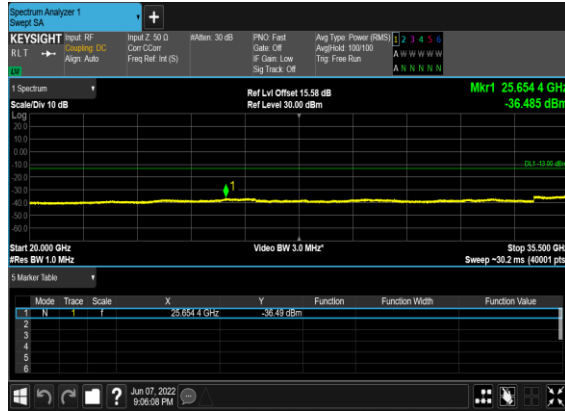


N78(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

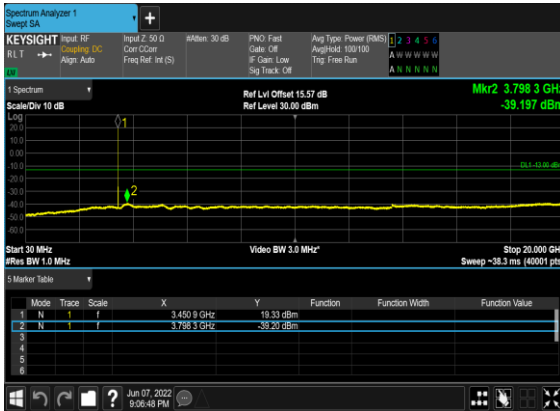


N78(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

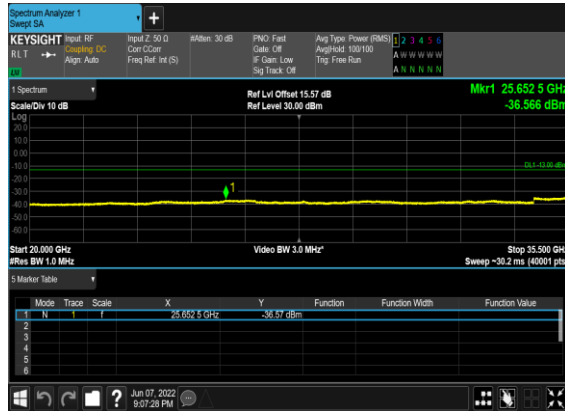


N78(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

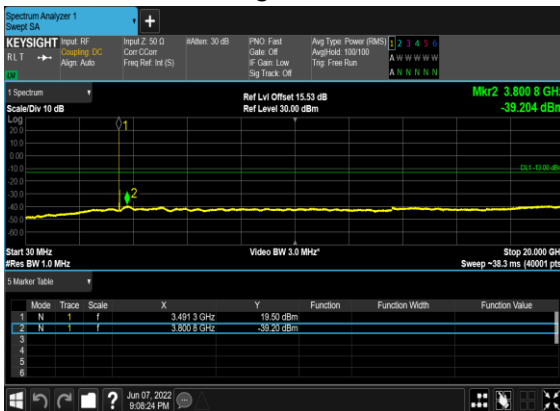


N78(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

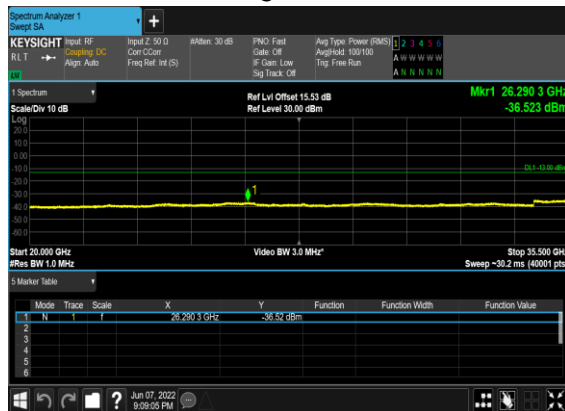


N78(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

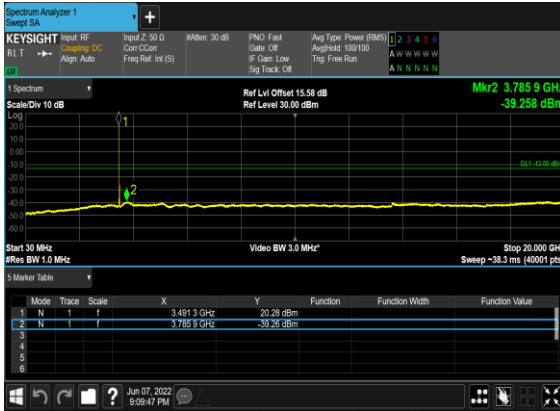


N78(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

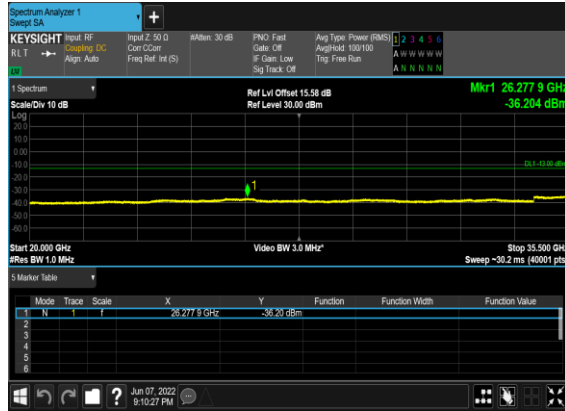


N78(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH

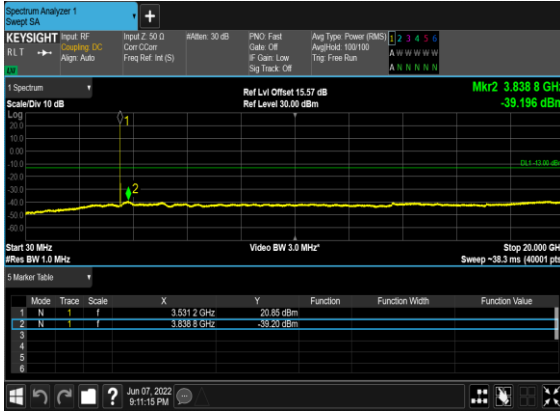


N78(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH

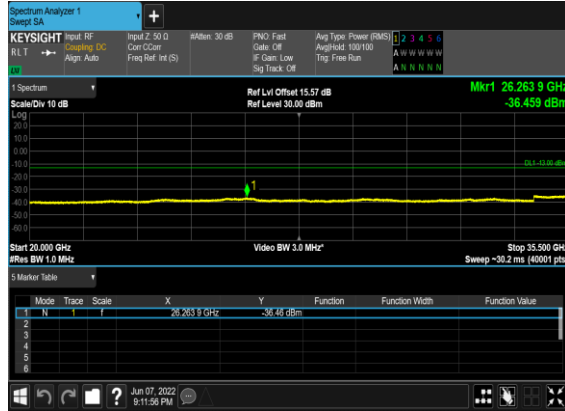

N78(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

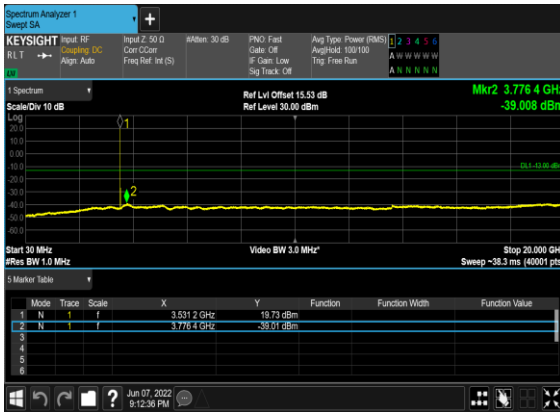


N78(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

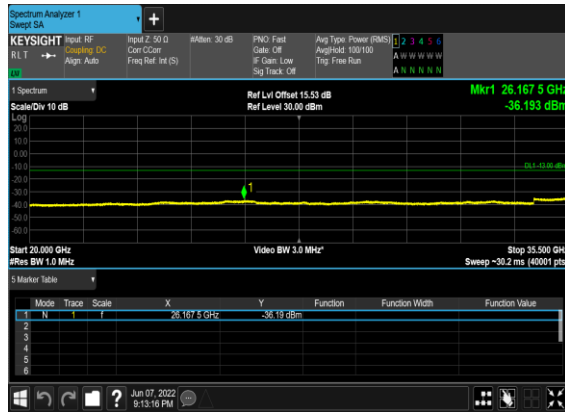


N78(60M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH




N78(60M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

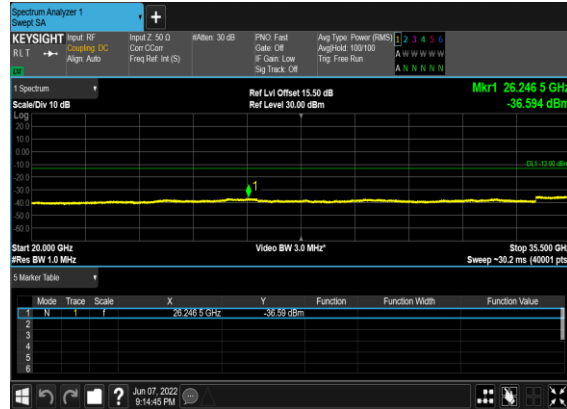


N78(60M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

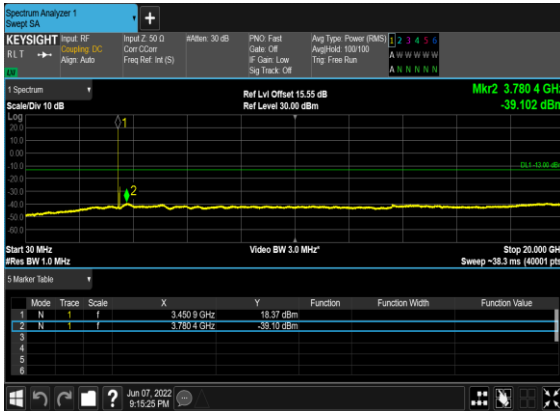


N78(60M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

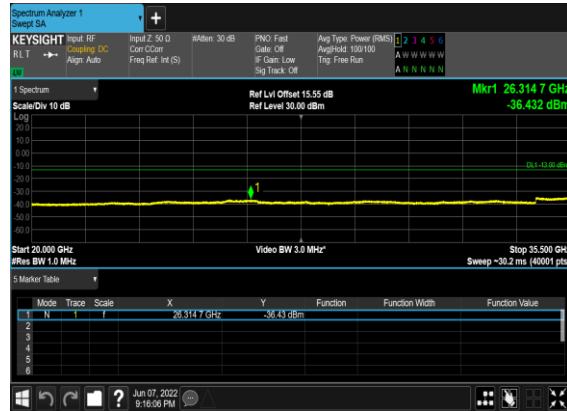


N78(60M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

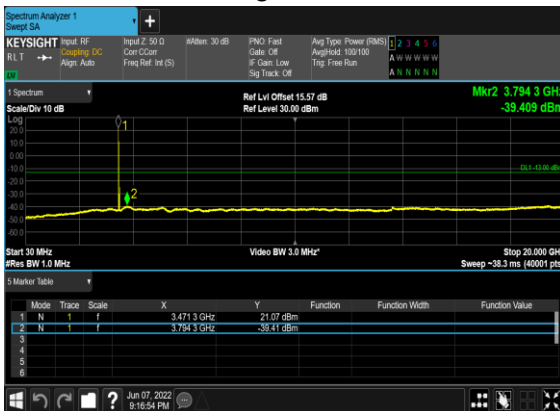


N78(60M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

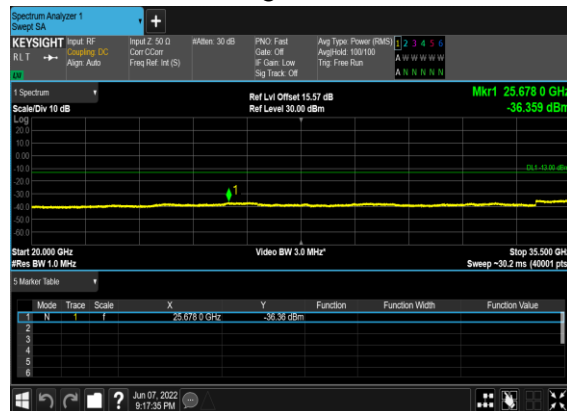


N78(60M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

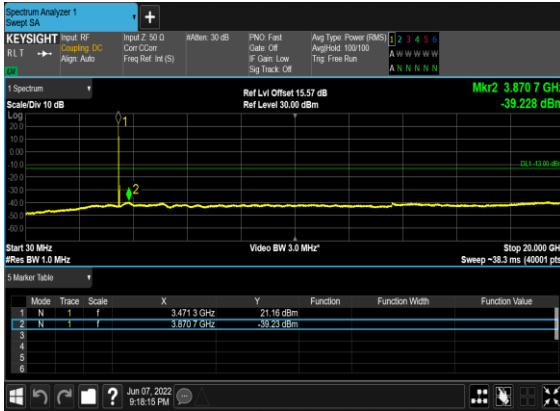


N78(60M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

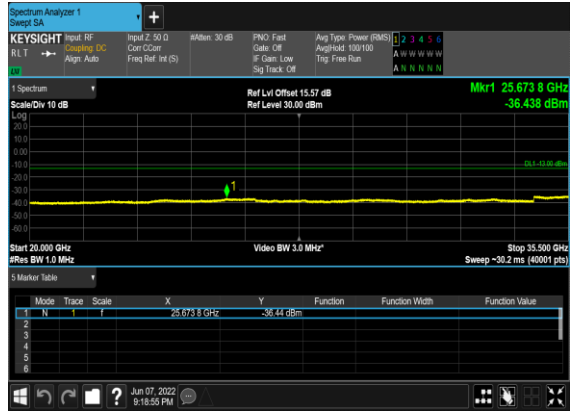


N78(60M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH

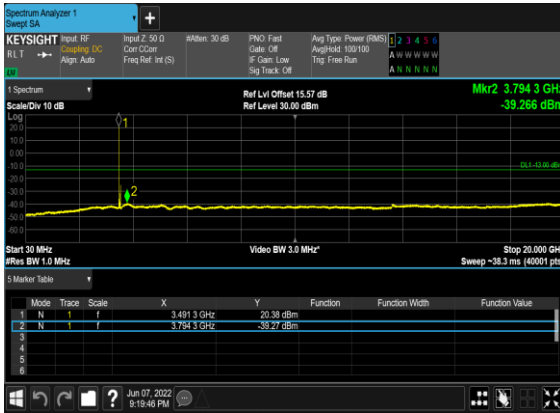


N78(60M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH

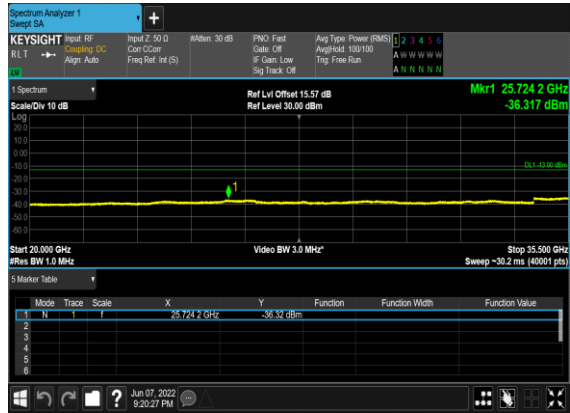


N78(60M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

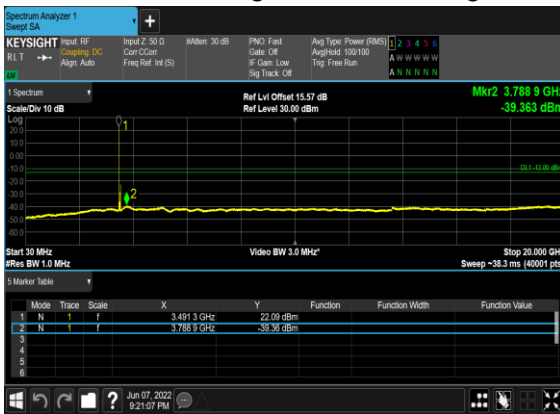


N78(60M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

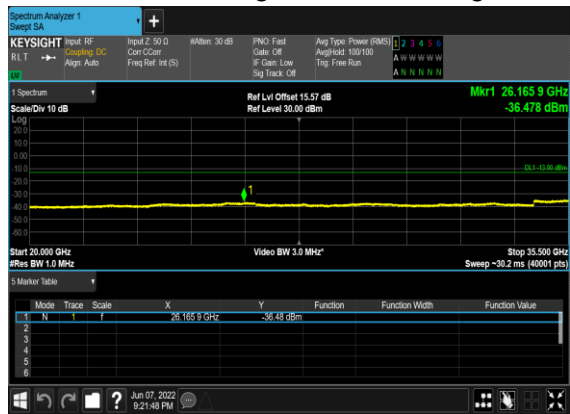


N78(100M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

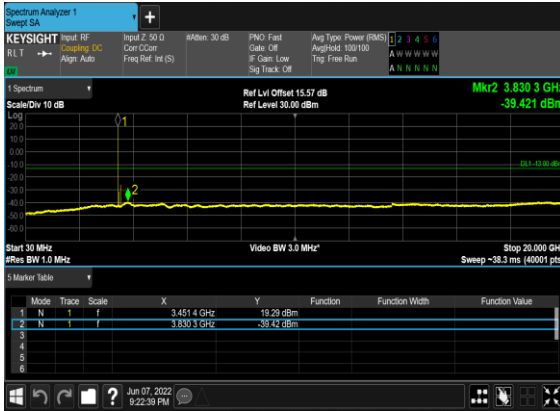

N78(100M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

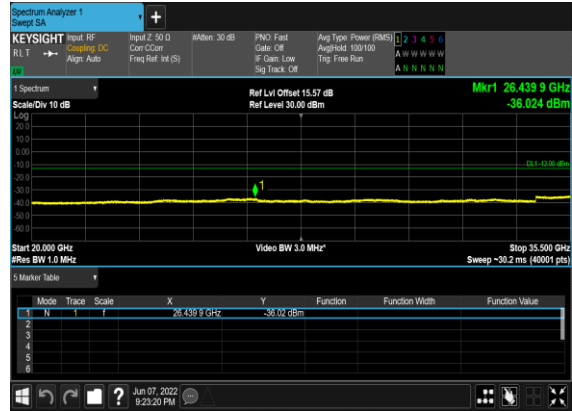

N78(100M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

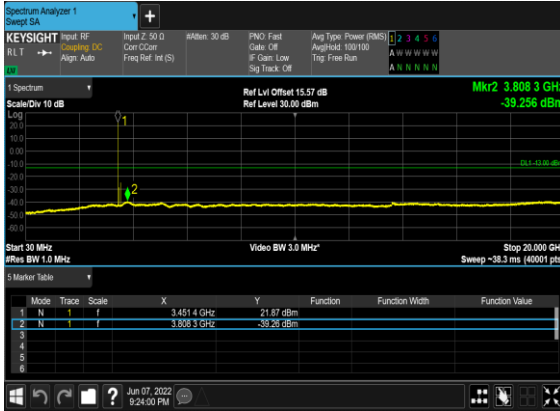

N78(100M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

