
Antenna Reports

Main Antenna vendor: Motorola

Test lab: Motorola internal lab (by GTS RayZone2800)

Antenna model name: Midframe

Issue date: 2022/11/14

Antenna Summary Table

Check items	Information
Provided by lab	Motorola internal lab (by GTS RayZone2800)
Manufacturer/ Brand name	Motorola
Model name (Part number)	XT2309-2
Test environment	Motorola Shanghai RD team Lab with GTS RayZone2800 chamber
Test software	MaxSign Libra
List of calibrated test equipment	GTS RayZone2800 with calibrated date: On August 9, 2022
Antenna detail info.	ANT3: WiFi 2.4G antenna (2.4~2.5GHz), Metal type antenna. ANT4: WiFi 5G / 6E antenna(5.15~7.125GHz), Metal antenna. ANT5: WiFi 5G / 6E antenna(5.15~7.125GHz), Metal antenna. ANT6: WiFi 2.4G antenna (2.4~2.5GHz), Metal antenna. NFC Antenna: Differential port to excite FPC coil + Ferrite sheet with dimension 32.79 mm *32.1mm * 0.25mm
Antenna gain test data	Included antenna frequency, gain pattern

Note: Antenna gain was measured in the anechoic chamber, 3D scan was exercised, and the highest numbers are reported in this document.

ANT3/4/5/6


Antenna model name: Exterior metal

BT/WLAN CH0 Peak Gain (dBi)			
2400~2483.5MHz	-6.7 dBi	6E UNII-5	-8.5 dBi
5150~5250MHz	-8.1 dBi	6E UNII-6	-9.1 dBi
5250~5350MHz	-7.6 dBi	6E UNII-7	-8.8 dBi
5470~5725MHz	-7.2 dBi	6E UNII-8	-9.5 dBi
5725~5850MHz	-7.2 dBi		


BT/WLAN CH1 Peak Gain (dBi)			
2400~2483.5MHz	-5.7dBi	6E UNII-5	-8.3 dBi
5150~5250MHz	-7.6 dBi	6E UNII-6	-8.7 dBi
5250~5350MHz	-6.8 dBi	6E UNII-7	-8.5 dBi
5470~5725MHz	-6.5 dBi	6E UNII-8	-9.2 dBi
5725~5850MHz	-7.1 dBi		


ANT6- WiFi 2.4G CH0

2420MHz


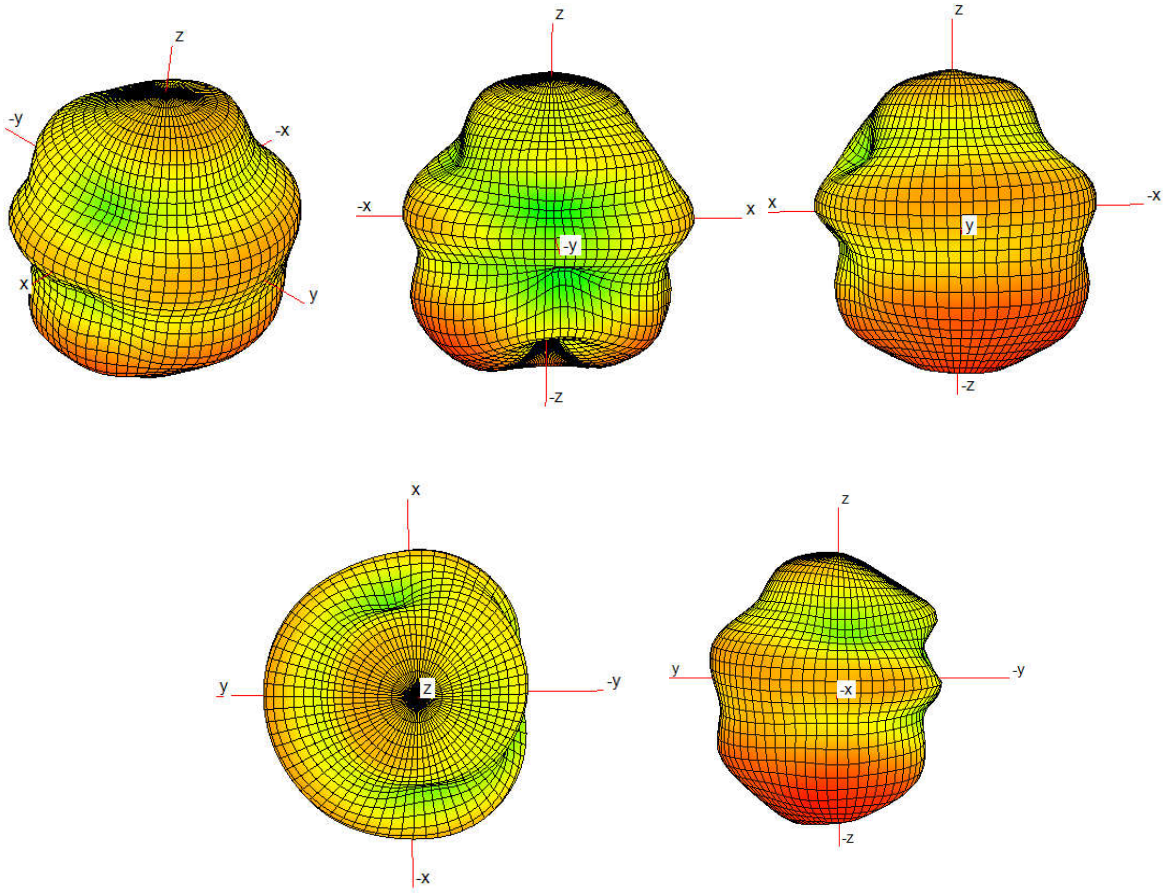


2450MHz

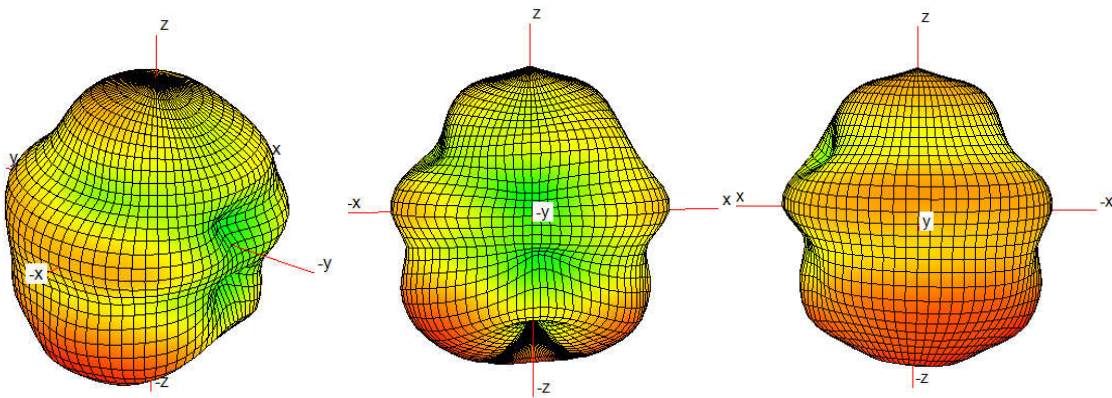


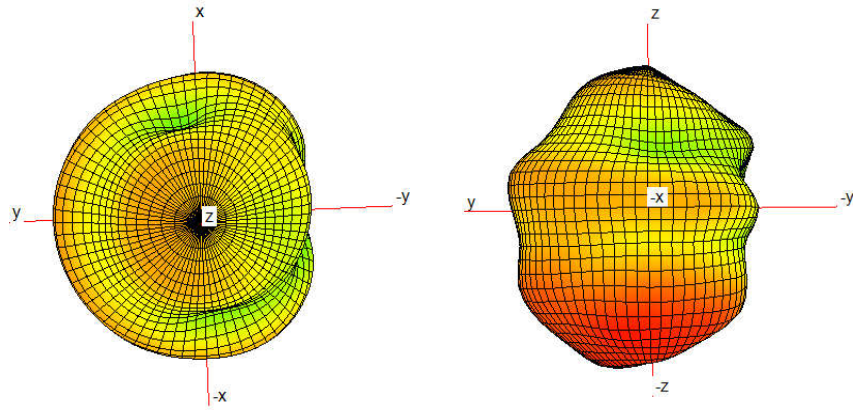


ANT4-WIFI 5G CH1
5280MHz

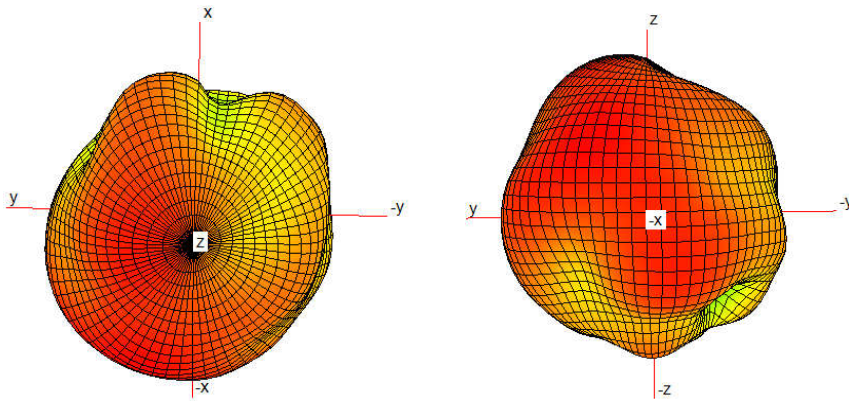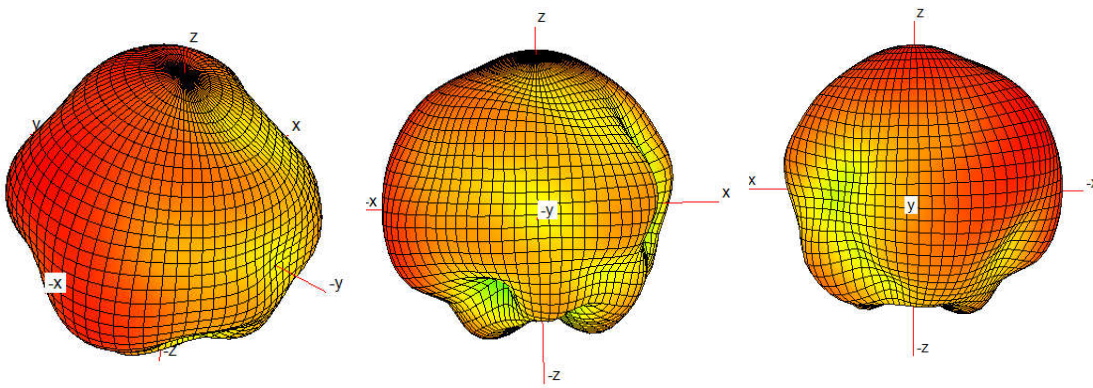


5500MHz

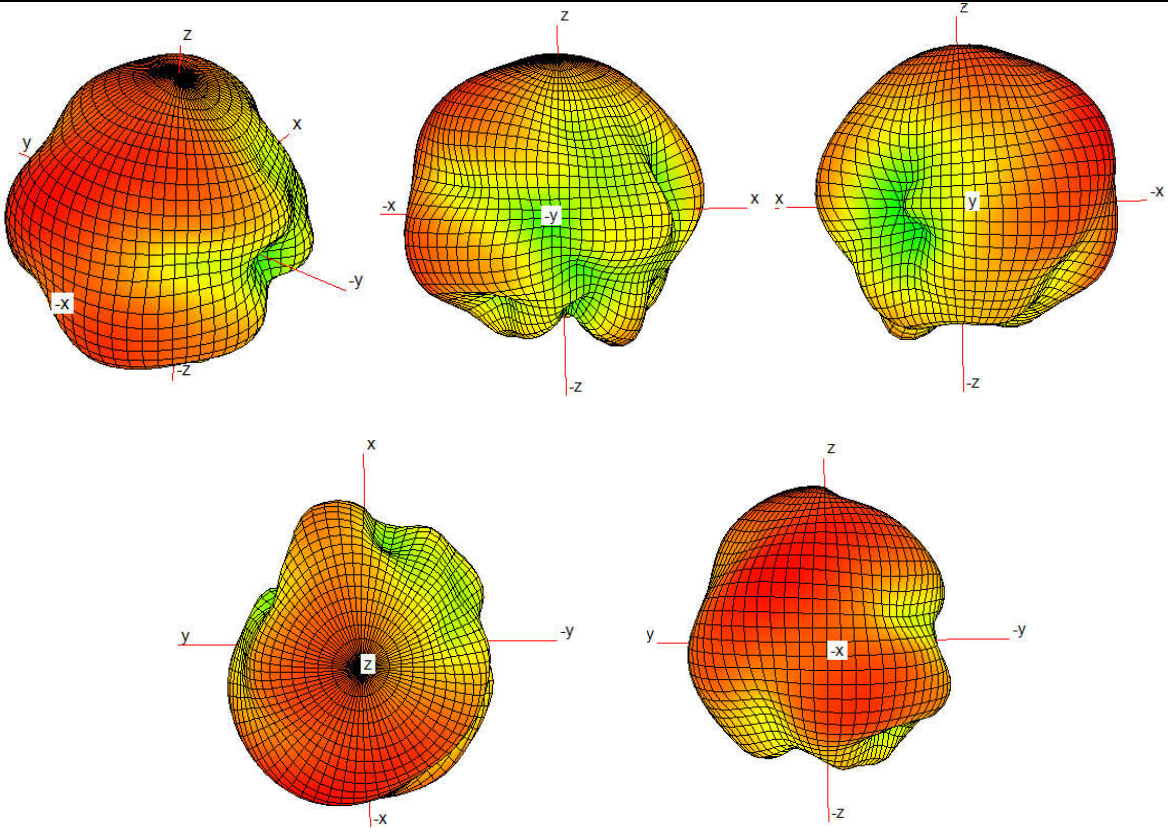


5780MHz

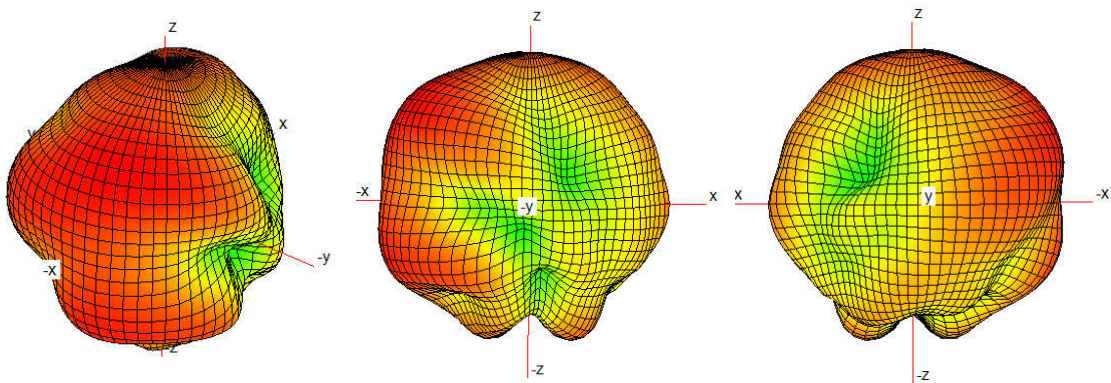


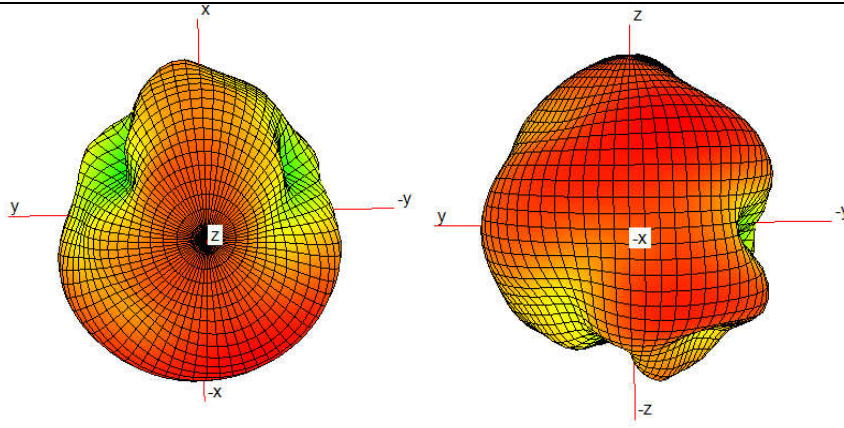


ANT4-WIFI 6E CH1
6000MHz


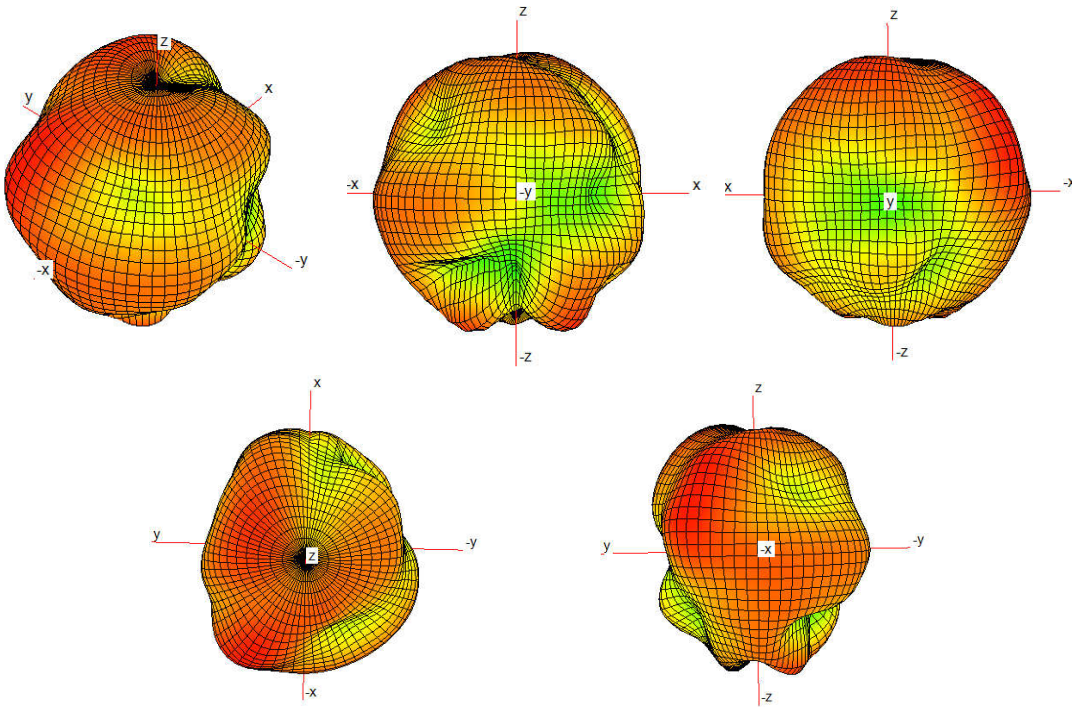


6500MHz

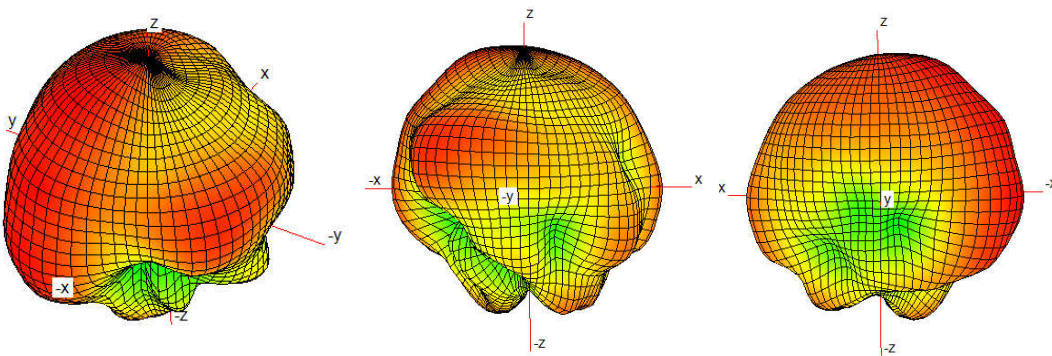


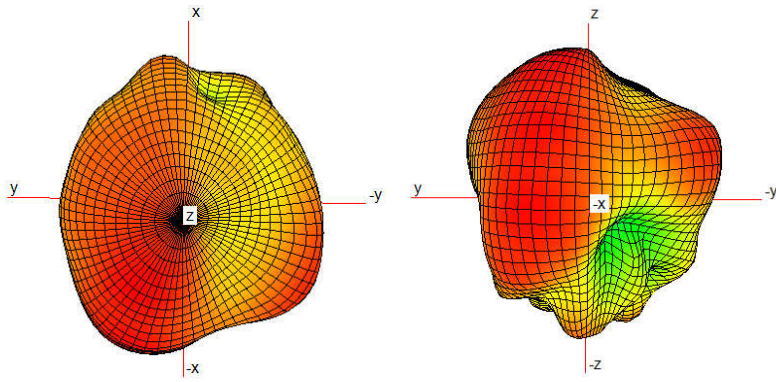


6800MHz

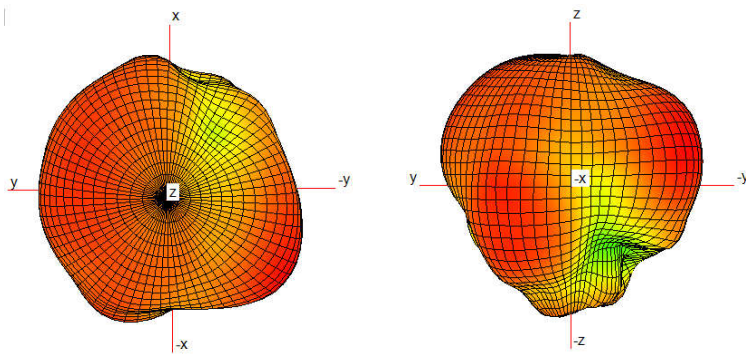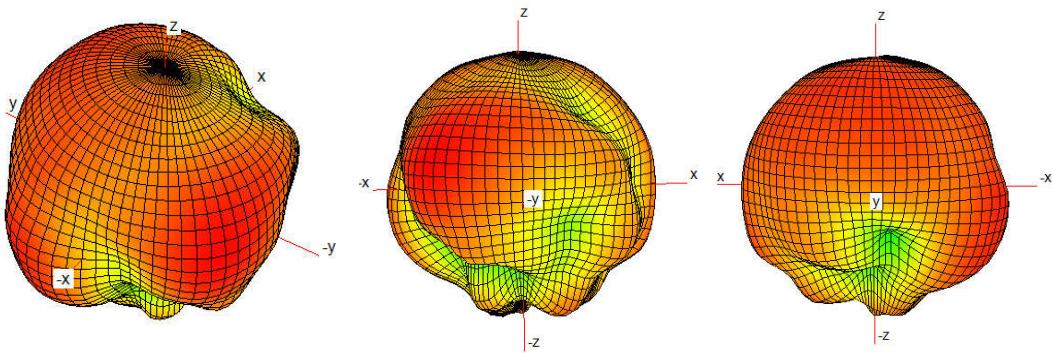



7000MHz

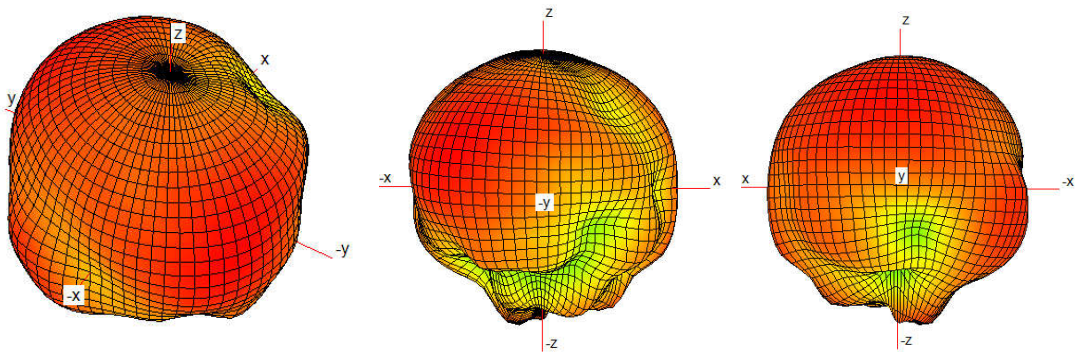


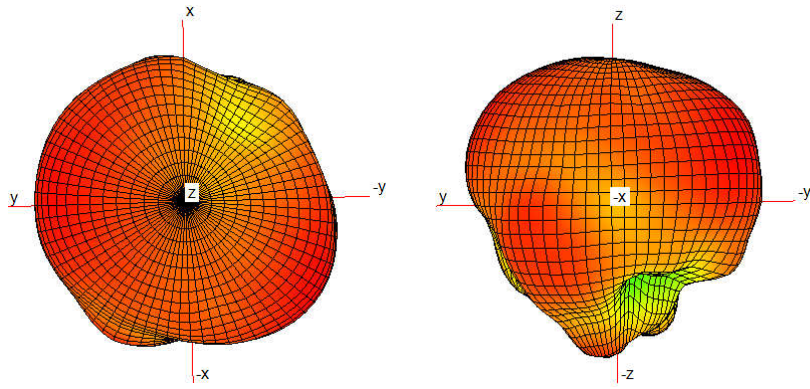


ANT3- WiFi 2.4G CH1


2420MHz

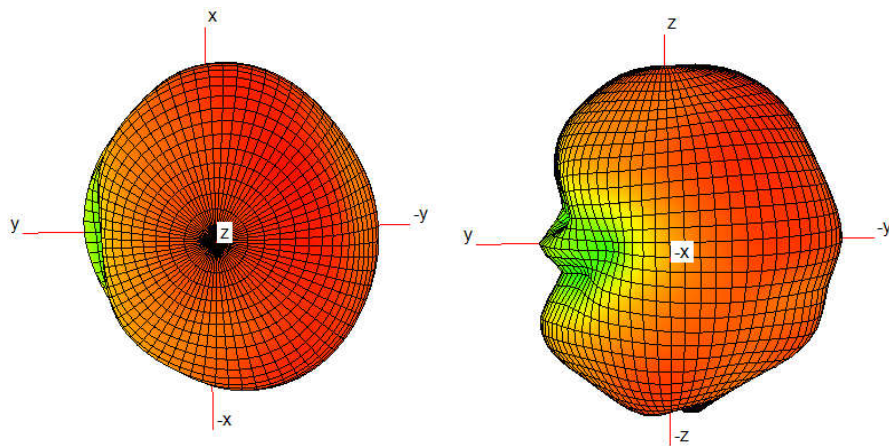
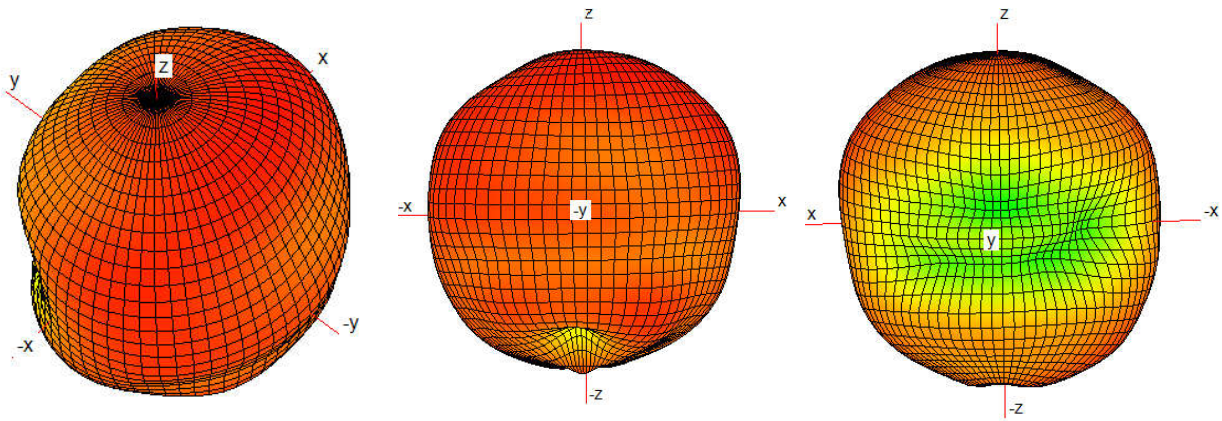


2450MHz




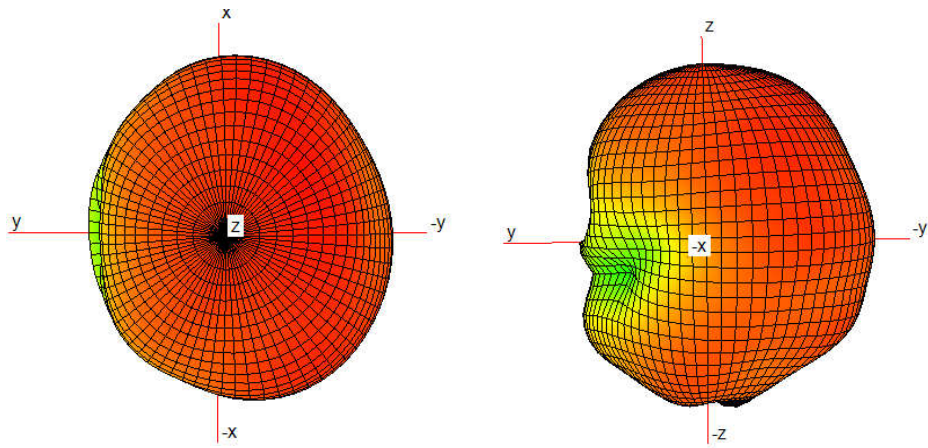
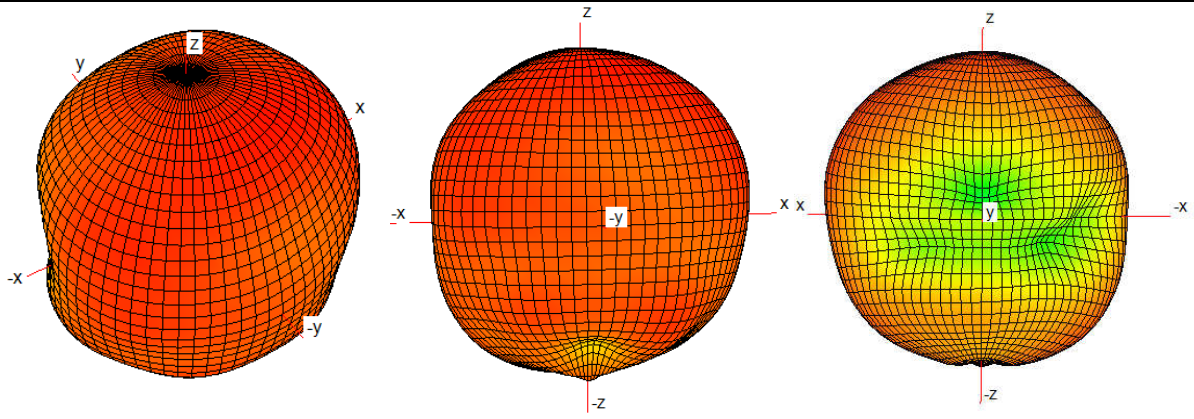


ANT5- WiFi 5G CH0
5280MHz


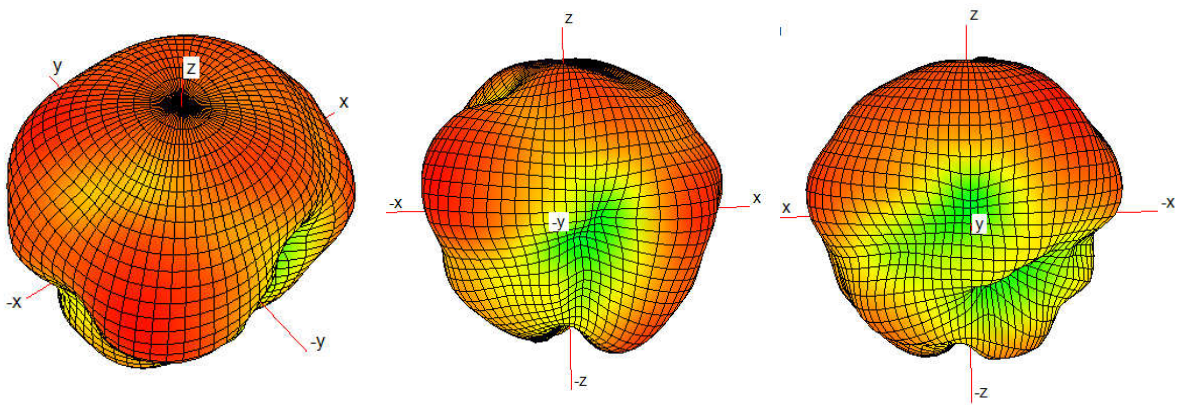


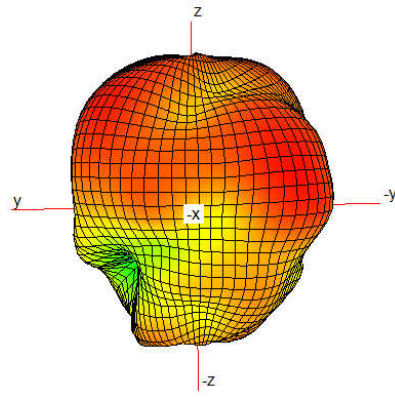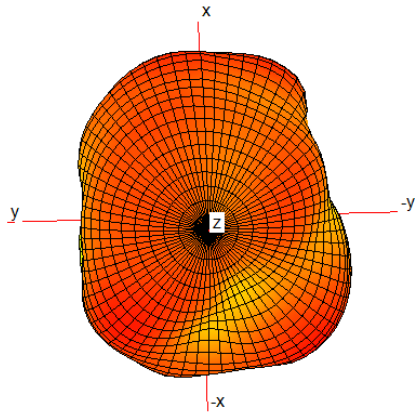

5500MHz

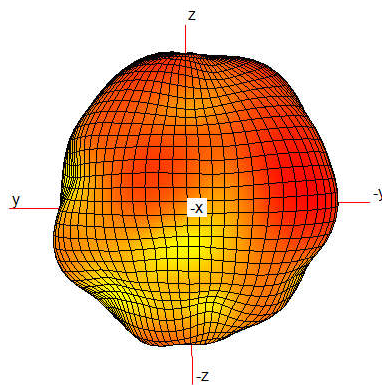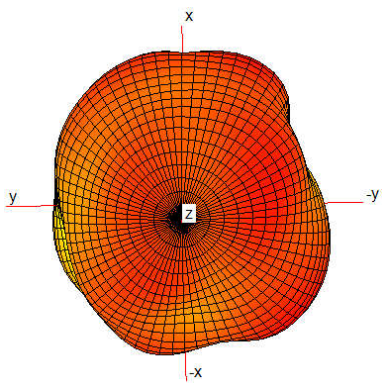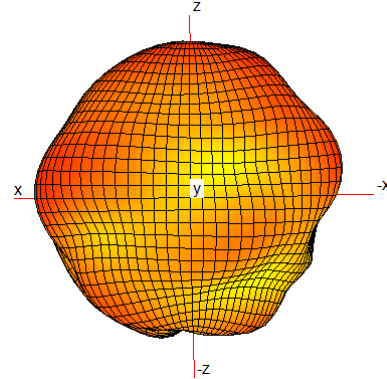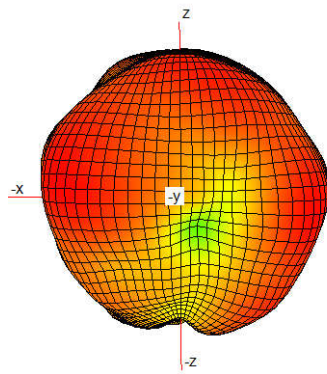


5780MHz

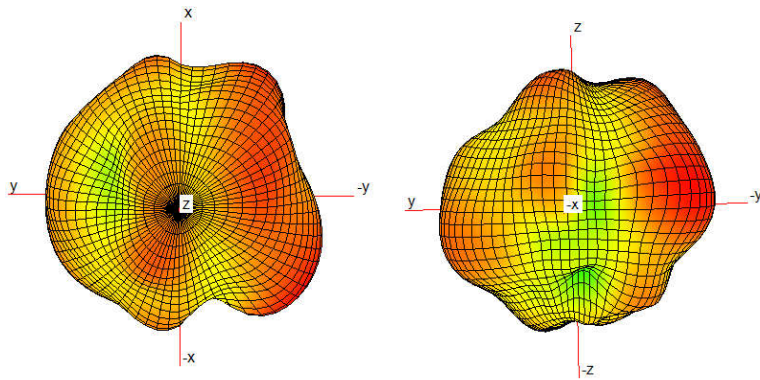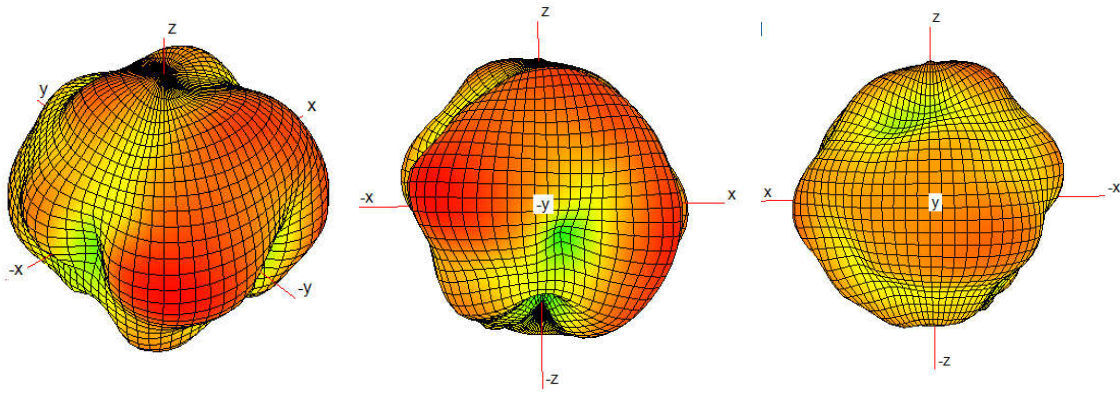


ANT5- WiFi 6E CH0


6000MHz

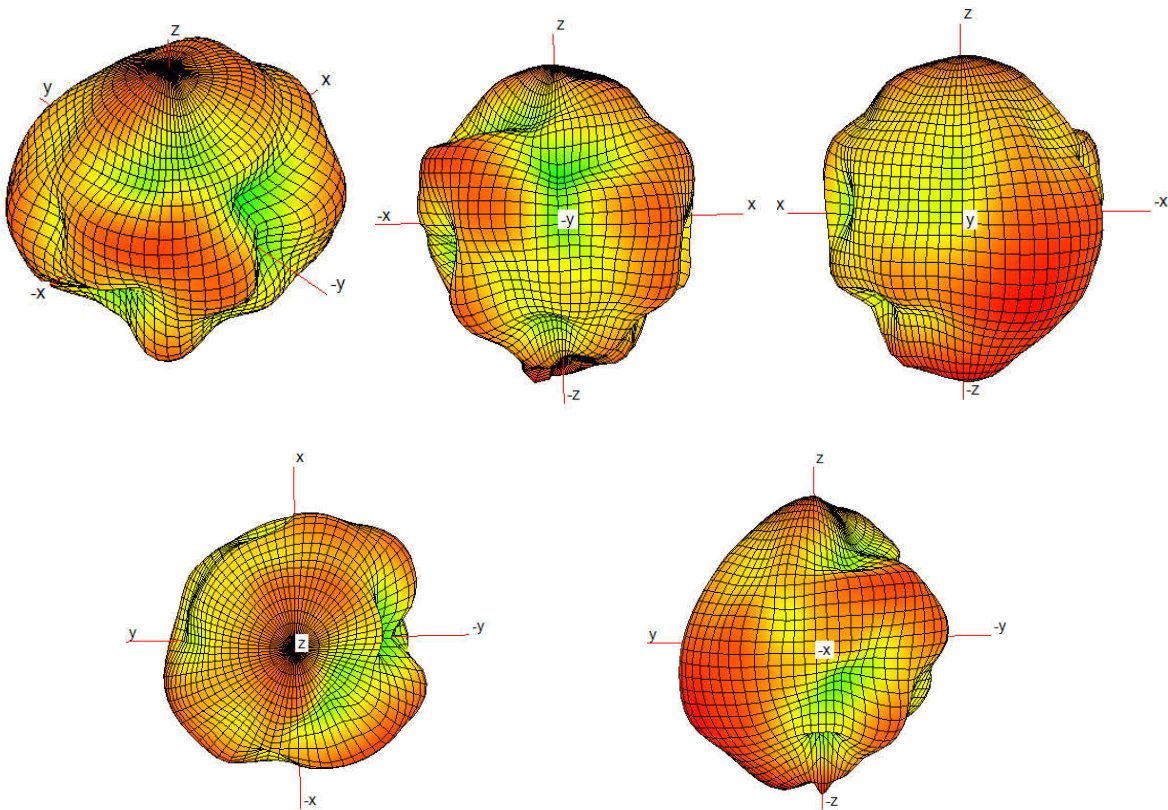


6500MHz

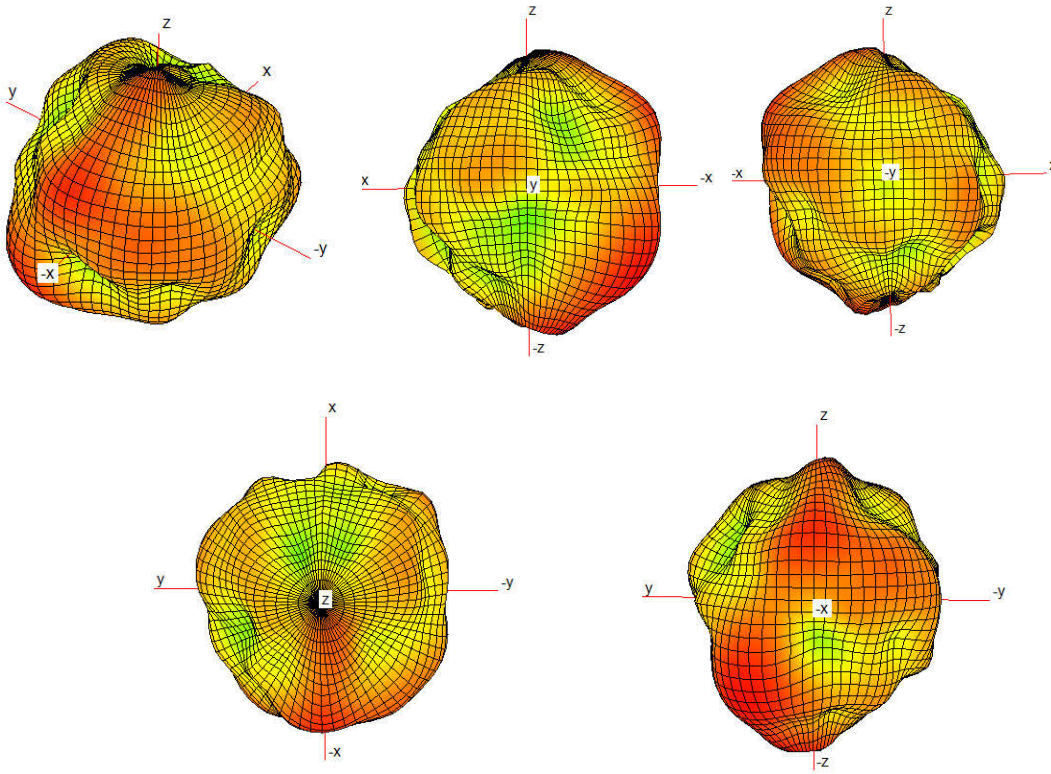


6800MHz

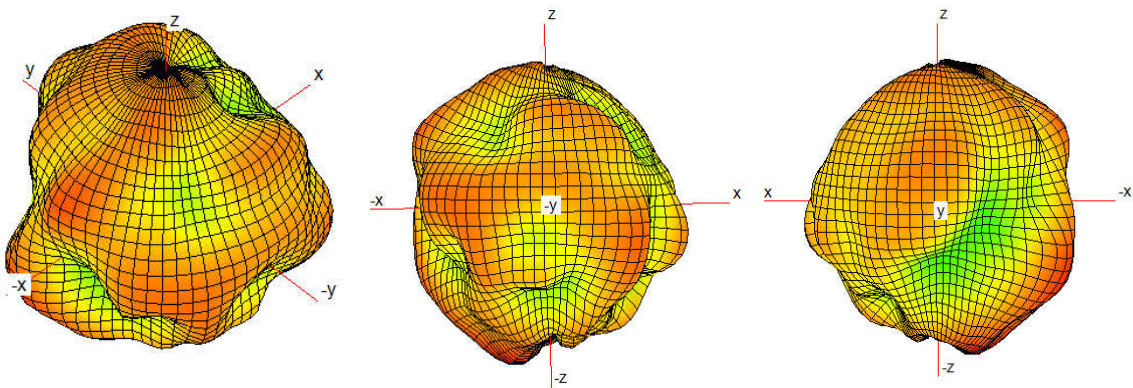

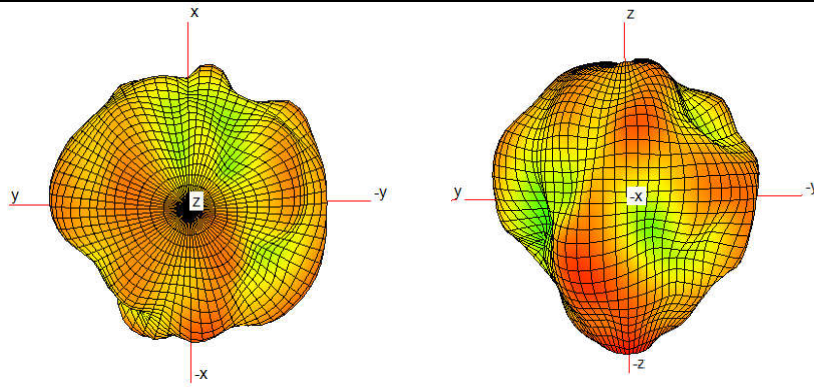

7000MHz

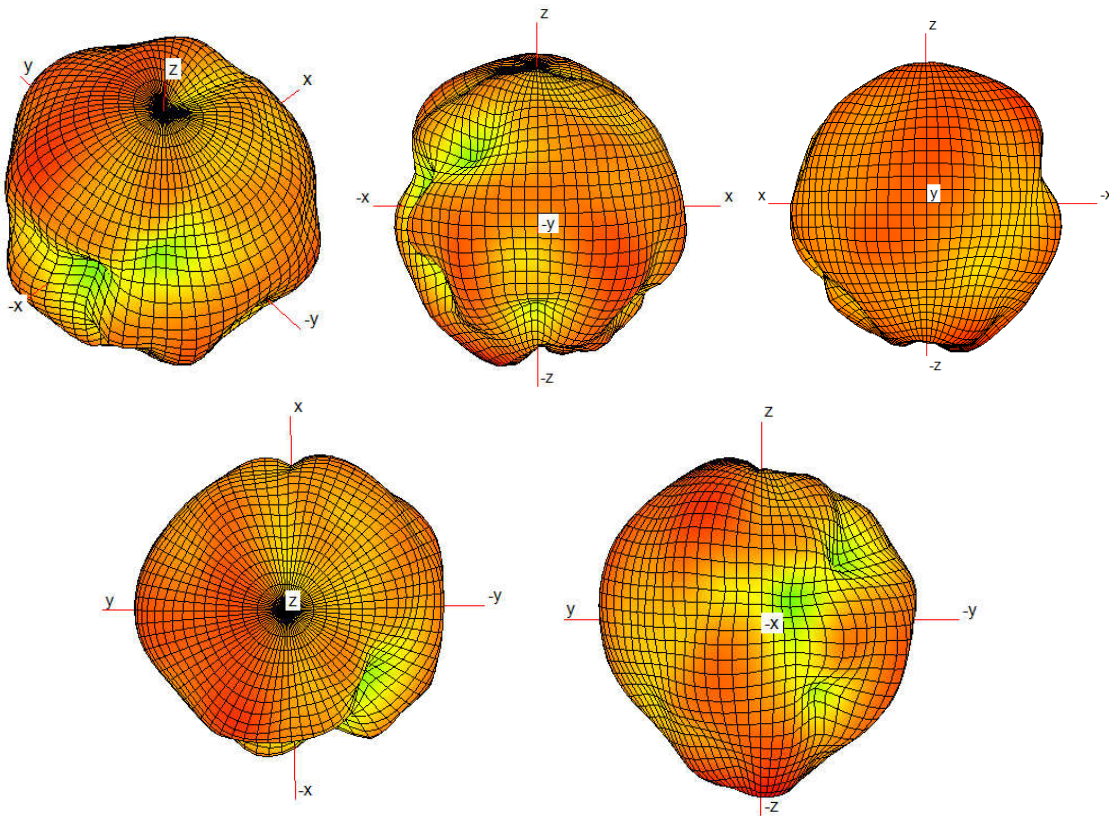



MOTOROLA

**MOBILE DEVICES
Companion Products**

**MATERIAL or METHODS
Specification**

PN SA38D60107

TITLE: ASSY WIRELESS CHARGE COIL

REVISION DATE: **15-SEP-2022**

MEMO:

ISSUE: **A**

PAGE: **1 of 4**

REV.	MEMO	NAME	DATE	CHANGES
A		Yufei Tong	9-15-2022	-Initial Release
B				-
C				-

--- Revision History Continued on Next Page ---

The information contained in this document is Motorola Confidential Restricted and shall not be reproduced or used in part or whole without Motorola's written consent.

**MOTOROLA****MOBILE DEVICES
Companion Products****MATERIAL or METHODS
Specification**

PN SA38D60107

TITLE: ASSY WIRELESS CHARGE COIL

REVISION DATE: **15-SEP-2022**

MEMO:

ISSUE: **A**PAGE: **2 of 4****Coil Module Material : FPC Type**

Module	Module PN	Material	Material PN	Vendor
WPC	FAACLO11M101A0	FPC	F20CLO11001A0	Anyuanda
		Nanocrystalline	FAACLO110192A0MQ	Sunway
		Graphite	F2QCLO11101A0	FRD
		Mylar	F2QCLO11201A0	Huabida
		Foam	F2QCLO11301A0	Huabida

Material List

Specification

The information contained in this document is Motorola Confidential Restricted and shall not be reproduced or used in part or whole without Motorola's written consent.

**MOTOROLA****MOBILE DEVICES
Companion Products****MATERIAL or METHODS
Specification**

PN SA38D60107

TITLE: ASSY WIRELESS CHARGE COIL

REVISION DATE: **15-SEP-2022**

MEMO:

ISSUE: **A**PAGE: **3 of 4**

Finished product Performance test standard (with Graphite)				
Item	Unit or description	specification		
		Min	Type	Max
Ls (Inductance)	uH@100kHz Before Reliability	8	8.2	8.4
	uH@100kHz After Reliability	7.8	/	8.6
Rdc (DC Resistance)	mΩ 100kHz Before Reliability	/	/	255
	mΩ 100kHz After Reliability	/	/	260
Rac (AC Resistance)	mΩ@100kHz Before Reliability	/	/	330
	mΩ@100kHz After Reliability	/	/	340
Q	@100kHz Before Reliability	15	/	/
	@100kHz After Reliability	14.5	/	/

N=11 turns.

MEP: LA71FP002-1H

Specification

The information contained in this document is Motorola Confidential Restricted and shall not be reproduced or used in part or whole without Motorola's written consent.