



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2309-2
FCC ID : IHDT56AH5
STANDARD : 47 CFR Part 2, 22, 24, 27
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S) : Nov. 07, 2022 ~ Dec. 06, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY 3
SUMMARY OF TEST RESULT 4
1 GENERAL DESCRIPTION 5
1.1 Applicant 5
1.2 Manufacturer 5
1.3 Product Feature of Equipment Under Test 5
1.4 Product Specification of Equipment Under Test 5
1.5 Modification of EUT 6
1.6 Specification of Accessory 7
1.7 Maximum ERP/EIRP Power and Emission Designator 8
1.8 Testing Location 9
1.9 Test Software 9
1.10 Applicable Standards 9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 10
2.1 Test Mode 10
2.2 Connection Diagram of Test System 12
2.3 Support Unit used in test configuration and system 12
2.4 Measurement Results Explanation Example 13
2.5 Frequency List of Low/Middle/High Channels 13
3 CONDUCTED TEST ITEMS 16
3.1 Measuring Instruments 16
3.2 Test Setup 16
3.3 Test Result of Conducted Test 16
3.4 Conducted Output Power and ERP/EIRP 17
3.5 Peak-to-Average Ratio 18
3.6 Occupied Bandwidth 19
3.7 Conducted Band Edge 20
3.8 Conducted Spurious Emission 22
3.9 Frequency Stability 23
4 RADIATED TEST ITEMS 24
4.1 Measuring Instruments 24
4.2 Test Setup 24
4.3 Test Result of Radiated Test 25
4.4 Radiated Spurious Emission 26
5 LIST OF MEASURING EQUIPMENT 27
6 UNCERTAINTY OF EVALUATION 28
APPENDIX A. TEST RESULTS OF CONDUCTED TEST
APPENDIX B. TEST RESULTS OF RADIATED TEST
APPENDIX C. TEST SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG202807I	Rev. 01	Initial issue of report	Dec. 16, 2022



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§22.913(a)(5)	Effective Radiated Power (5G NR n5)	ERP < 7 Watt		
	§24.232(c) §27.50(h)(2)	Equivalent Isotropic Radiated Power (5G NR n2) (5G NR n7, n41, n38)	EIRP < 2Watt		
	§27.50(d)(4)	Equivalent Isotropic Radiated Power (5G NR n66)	EIRP < 1Watt		
3.5	§24.232(d)	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a) §24.238(a) §27.53(h) §27.53(g) §27.53(l)(2)	Conducted Band Edge Measurement (5G NR n5) (5G NR n2) (5G NR n66)	< 43+10log ₁₀ (P[Watts])	PASS	-
	§27.53(m)(4)	Conducted Band Edge Measurement (5G NR n7, n41, n38)	§27.53(m)(4)		
3.8	§2.1051 §22.917(a) §24.238(a) §27.53(h) §27.53(g) §27.53(l)(2)	Conducted Spurious Emission (5G NR n5) (5G NR n2) (5G NR n66)	< 43+10log ₁₀ (P[Watts])	PASS	-
	§2.1051 §27.53(m)(4)	Conducted Spurious Emission (5G NR n7, n41, n38)	< 55+10log ₁₀ (P[Watts])		
3.9	§2.1055 §22.355	Frequency Stability Temperature & Voltage	< 2.5 ppm for Part 22	PASS	-
	§24.235 §27.54		Within Authorized Band		
4.4	§2.1053 §22.917(a) §24.238(a) §27.53(h) §27.53(g) §27.53(l)(2)	Radiated Spurious Emission (5G NR n5) (5G NR n2) (5G NR n66)	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 22.52 dB at 7548.00 MHz
	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (5G NR n7, n41, n38)	< 55+10log ₁₀ (P[Watts])		

Declaration of Conformity:
 The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:
 The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2309-2
FCC ID	IHDT56AH5
IMEI Code	Conducted : 358554730014911/358554730014929 Radiation : 358554730015371/358554730015389
HW Version	DVT2
SW Version	T1TB33.3
EUT Stage	Identical Prototype

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5 : 824 MHz ~ 849 MHz 5G NR n7 : 2500 MHz ~ 2570 MHz 5G NR n38 : 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n66 : 1710 MHz ~ 1780 MHz
Rx Frequency	5G NR n2 : 1930 MHz ~ 1990 MHz 5G NR n5 : 869 MHz ~ 894 MHz 5G NR n7 : 2620 MHz ~ 2690 MHz 5G NR n38: 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n66 : 2110 MHz~ 2200 MHz
Bandwidth	n2/n5: 5MHz / 10MHz / 15MHz / 20MHz n7: 5MHz / 10MHz / 15MHz / 20MHz / 25MHz / 30MHz / 40MHz n38: 10MHz / 15MHz / 20MHz / 30MHz / 40MHz n41 : 20MHz / 30MHz / 40MHz / 50MHz / 60MHz / 70MHz / 80MHz / 90MHz / 100MHz n66 : 5MHz / 10MHz / 15MHz / 20MHz / 30MHz / 40MHz
SCS	15kHz for n2/n5/n7/n66



	30kHz for n38/n41
Antenna Gain	<p><Ant. 0> n2: -1.7 dBi n5: -4.6 dBi n7: -3.3 dBi n38: -3.3 dBi n41: -3.3 dBi n66: -1.2 dBi</p> <p><Ant. 1> n2: -1.5 dBi n5: -5.1 dBi n7: -3.8 dBi n38: -2.2 dBi n41: -2.2 dBi n66: -2.8 dBi</p>
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

Remark:

1. The maximum ERP/EIRP is calculated from max output power and max antenna gain, only the maximum ERP/EIRP are shown in the report, 5G NR n38/n41/n66 for Ant. 0 and n2/n5/n7 for Ant. 1.
2. All the supported ENDC combinations are verified conducted power, only the ENDC combination with highest power are shown in the report.
3. 5G NR n7/n66 support SA mode and NSA mode. According to the maximum power between SA and NSA mode, SA covers NSA mode for n66, and NSA covers SA mode for n7.
4. The device supports two PAs for 5G NR n7(main PA for SA mode and other PA for NSA mode), the maximum power of other PA is higher than the main PA, therefore, we chose higher power of other PA to calculate the EIRP and show in the report.
5. The device supports two PAs for 5G NR n66(main PA for SA mode and other PA for NSA mode), the maximum power of main PA is higher than the other PA, therefore, we chose higher power of main PA to calculate the EIRP and show in the report.
6. The EN-DC mode combination could be referred to the product spec.
7. 5G NR n2/n5 support NSA mode only and 5G NR n38/n41 support SA mode only.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Specification of Accessory

Specification of Accessory				
AC Adapter 1(US)	Brand Name	Motorola (Chenyang)	Model Name	MC-681N
AC Adapter 1(EU)	Brand Name	Motorola (Chenyang)	Model Name	MC-682N
AC Adapter 1(UK)	Brand Name	Motorola (Chenyang)	Model Name	MC-683N
AC Adapter 1(AU)	Brand Name	Motorola (Chenyang)	Model Name	MC-685N
AC Adapter 1(AR)	Brand Name	Motorola (Chenyang)	Model Name	MC-686N
AC Adapter 1(BR)	Brand Name	Motorola (Chenyang)	Model Name	MC-687N
AC Adapter 1(CHILE)	Brand Name	Motorola (Chenyang)	Model Name	MC-689N
AC Adapter 2(US)	Brand Name	Motorola (Acbel)	Model Name	MC-681N
AC Adapter 2(EU)	Brand Name	Motorola (Acbel)	Model Name	MC-682N
AC Adapter 2(UK)	Brand Name	Motorola (Acbel)	Model Name	MC-683N
AC Adapter 2(AU)	Brand Name	Motorola (Acbel)	Model Name	MC-685N
AC Adapter 2(AR)	Brand Name	Motorola (Acbel)	Model Name	MC-686N
AC Adapter 2(BR)	Brand Name	Motorola (Acbel)	Model Name	MC-687N
AC Adapter 3(IN)	Brand Name	Motorola (Salom)	Model Name	MC-684
Battery	Brand Name	Motorola(SCUD)	Model Name	PB50
Earphone	Brand Name	Motorola (Lyand)	Model Name	MI181C(SH38D62338)
USB Cable 1	Brand Name	Motorola (Saibao)	Model Name	SC18D24968
USB Cable 2	Brand Name	Motorola (Saibao)	Model Name	SC18D71644
Wireless Charging dock	Marketing Name	TurboPower 15W Wireless Charging Stand	Model Name	MW - 03



1.7 Maximum ERP/EIRP Power and Emission Designator

EN DC_7A-n2A		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
20	1860.0 ~ 1900.0	0.1343	17M9G7D	0.0787	17M9W7D

EN DC_7A-n5A		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)
20	834.0 ~ 839.0	0.0393	18M9G7D	0.0317	19M0W7D

5G NR n66		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
40	1730.0 ~ 1760.0	0.1503	39M0G7D	0.1175	38M8W7D

EN DC_66A-n7A		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
40	2520.0 ~ 2550.0	0.0904	38M8G7D	0.0701	39M0W7D

5G NR n38		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	2575.0 ~ 2615.0	0.1076	8M67G7D	0.0624	8M73W7D
40	2590.0 ~ 2600.0	0.1127	37M9G7D	0.0638	38M1W7D

5G NR n41		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
100	2546.01 ~ 2640.00	0.1153	96M7G7D	0.0655	97M9W7D

Note:

- 5G NR n41 overlaps the entire frequency range of 5G NR n38. Therefore, the test results provided in this report covers 5G NR n41 as well as 5G NR n38, and 5G NR n38 supports BW 10MHz/15MHz, it is tested in the report.



2. All modulations have been tested, only the maximum bandwidth and the worst test results of PSK & QAM are shown in the report.

1.8 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-KS TH01-KS	CN1257	314309

1.9 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH04-KS	AUDIX	E3	6.2009-8-24al

1.10 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22, 24, 27
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

All test items were verified and recorded according to the standards and without any deviation during the test.




2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.

The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.

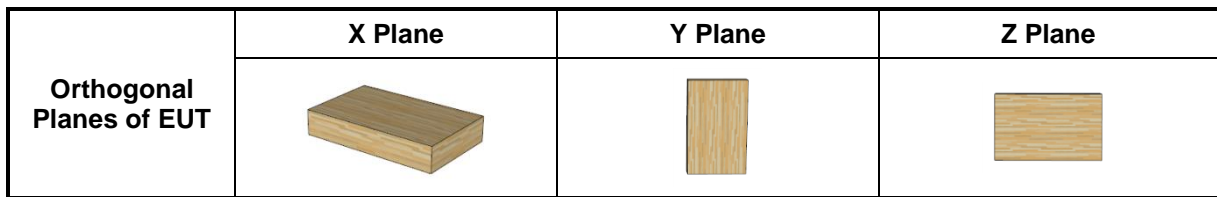


Test Items	5G NR	Bandwidth (MHz)												Modulation					RB #		Test Channel				
		5	10	15	20	25	30	40	50	60	70	80	90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM	1	Full	L	M	H	
Max. Output Power	n2	v	v	v	v	-	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	v
	n5	v	v	v	v	-	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	v
	n7	v	v	v	v	v	v	v	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	v
	n38	-	v	v	v	-	v	v	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	v
	n41	-	-	-	v	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	n66	v	v	v	v	-	v	v	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	n2				v	-	-	-	-	-	-	-	-	v	v					v		v			
	n5				v	-	-	-	-	-	-	-	-	v	v					v		v			
	n7				v				-	-	-	-	-	v	v					v		v			
	n38	-	v			-			-	-	-	-	-	v	v					v		v			
	n41	-	-	-		-							v	v	v					v		v			
	n66					-		v	-	-	-	-	-	v	v					v		v			
26dB and 99% Bandwidth	n2	v	v	v	v	-	-	-	-	-	-	-	-		v	v	v	v		v		v			
	n5	v	v	v	v	-	-	-	-	-	-	-	-		v	v	v	v		v		v			
	n7	v	v	v	v	v	v	v	-	-	-	-	-		v	v	v	v		v		v			
	n38	-	v	v		-			-	-	-	-	-		v	v	v	v		v		v			
	n41	-	-	-	v	-	v	v	v	v	v	v	v		v	v	v	v		v		v			
	n66	v	v	v	v	-	v	v	-	-	-	-	-		v	v	v	v		v		v			



Test Items	5G NR	Bandwidth (MHz)												Modulation					RB #		Test Channel			
		5	10	15	20	25	30	40	50	60	70	80	90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM	1	Full	L	M	H
Conducted Band Edge	n2	v	v		v	-	-	-	-	-	-	-	-	v	v				v	v	v		v	
	n5	v	v		v	-	-	-	-	-	-	-	-	v	v				v	v	v		v	
	n7	v			v			v	-	-	-	-	-	v	v				v	v	v		v	
	n38	-	v	v		-			-	-	-	-	-	v	v				v	v	v		v	
	n41	-	-	-	v	-				v				v	v	v				v	v	v		v
	n66	v			v	-		v	-	-	-	-	-	v	v				v	v	v		v	
Conducted Spurious Emission	n2	v	v		v	-	-	-	-	-	-	-	-	v	v				v		v	v	v	
	n5	v	v		v	-	-	-	-	-	-	-	-	v	v				v		v	v	v	
	n7	v			v			v	-	-	-	-	-	v	v				v		v	v	v	
	n38	-	v	v		-			-	-	-	-	-	v	v				v		v	v	v	
	n41	-	-	-	v	-				v				v	v	v				v		v	v	v
	n66	v			v	-		v	-	-	-	-	-	v	v				v		v	v	v	
Frequency Stability	n2				v	-	-	-	-	-	-	-	-		v				v			v		
	n5				v	-	-	-	-	-	-	-	-		v				v			v		
	n7							v	-	-	-	-	-		v				v			v		
	n38	-	v			-			-	-	-	-	-		v				v			v		
	n41	-	-	-	v	-									v	v				v		v	v	
	n66					-		v	-	-	-	-	-		v				v			v		
E.R.P / E.I.R.P	n2	v	v	v	v	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	
	n5	v	v	v	v	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	
	n7	v	v	v	v	v	v	v	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	
	n38	-	v	v	v	-	v	v	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	
	n41	-	-	-	v	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	
	n66	v	v	v	v	-	v	v	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	
Radiated Spurious Emission	n2	Worst Case																				v		
	n5	Worst Case																				v		
	n7	Worst Case																				v		
	n41	Worst Case																				v		
	n66	Worst Case																				v		
Note	1. The mark "v" means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.																							

2.2 Connection Diagram of Test System

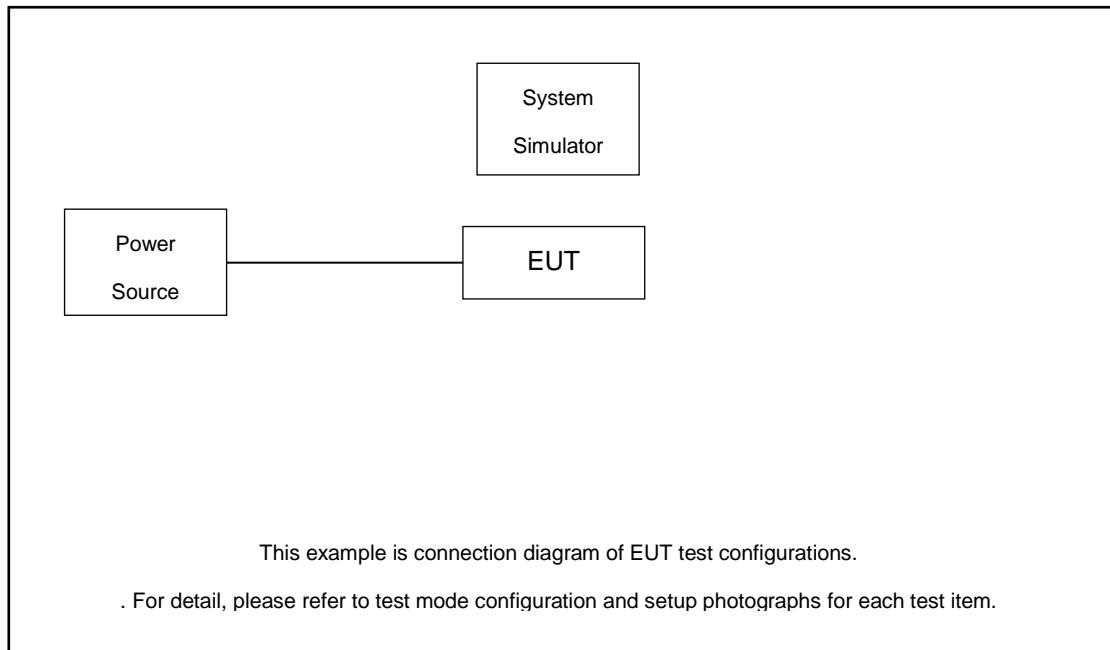

The EUT has been configuration operated in a manner tended to maximize its emission characteristics in a typical application.

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m



2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

$$\text{Offset} = \text{RF cable loss} + \text{attenuator factor}.$$

Following shows an offset computation example with cable loss 0.2 dB and 10dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 0.2 + 10 = 10.2 \text{ (dB)} \end{aligned}$$

2.5 Frequency List of Low/Middle/High Channels

5G NR n2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	372000	376000	380000
	Frequency	1860	1880	1900
15	Channel	371500	376000	380500
	Frequency	1857.5	1880	1902.5
10	Channel	371000	376000	381000
	Frequency	1855	1880	1905
5	Channel	370500	376000	381500
	Frequency	1852.5	1880	1907.5

5G NR n5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	166800	167300	167800
	Frequency	834	836.5	839
15	Channel	166300	167300	168300
	Frequency	831.5	836.5	841.5
10	Channel	165800	167300	168800
	Frequency	829	836.5	844
5	Channel	165300	167300	169300
	Frequency	826.5	836.5	846.5



5G NR n7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	504000	507000	510000
	Frequency	2520	2535	2550
30	Channel	503000	507000	511000
	Frequency	2515	2535	2555
25	Channel	502500	507000	511500
	Frequency	2512.5	2535	2557.5
20	Channel	502000	507000	512000
	Frequency	2510	2535	2560
15	Channel	501500	507000	512500
	Frequency	2507.5	2535	2562.5
10	Channel	501000	507000	513000
	Frequency	2505	2535	2565
5	Channel	500500	507000	513500
	Frequency	2502.5	2535	2567.5

5G NR n38 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	518000	519000	520000
	Frequency	2590	2595	2600
30	Channel	517000	519000	521000
	Frequency	2585	2595	2605
20	Channel	516000	519000	522000
	Frequency	2580	2595	2610
15	Channel	515500	519000	522500
	Frequency	2577.5	2595	2612.5
10	Channel	515000	519000	523000
	Frequency	2575	2595	2615

5G NR n41 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	509202	518598	528000
	Frequency	2546.01	2592.99	2640
90	Channel	508200	518598	528996
	Frequency	2541	2592.99	2644.98
80	Channel	507204	518598	529998



	Frequency	2536.02	2592.99	2649.99
70	Channel	506202	518598	531000
	Frequency	2531.01	2592.99	2655
60	Channel	505200	518598	531996
	Frequency	2526	2592.99	2659.98
50	Channel	504204	518598	532998
	Frequency	2521.02	2592.99	2664.99
40	Channel	503202	518598	534000
	Frequency	2516.01	2592.99	2670
30	Channel	502200	518598	534996
	Frequency	2511	2592.99	2674.98
20	Channel	501204	518598	535998
	Frequency	2506.02	2592.99	2679.99

5G NR n66 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	346000	349000	352000
	Frequency	1730	1745	1760
30	Channel	345000	349000	353000
	Frequency	1725	1745	1765
20	Channel	344000	349000	354000
	Frequency	1720	1745	1770
15	Channel	343500	349000	354500
	Frequency	1717.5	1745	1772.5
10	Channel	343000	349000	355000
	Frequency	1715	1745	1775
5	Channel	342500	349000	355500
	Frequency	1712.5	1745	1777.5

3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power



3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

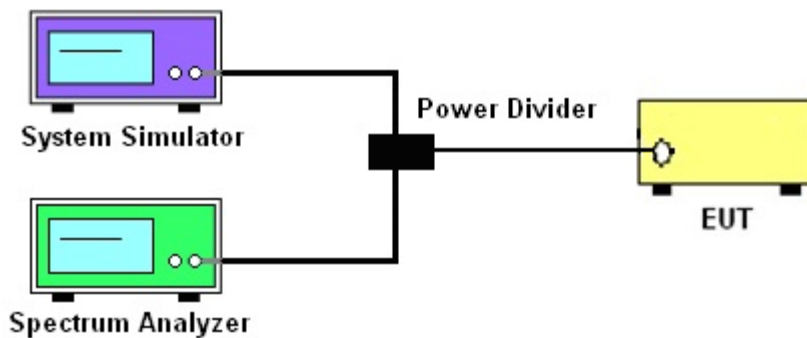

3.2.3 Frequency Stability

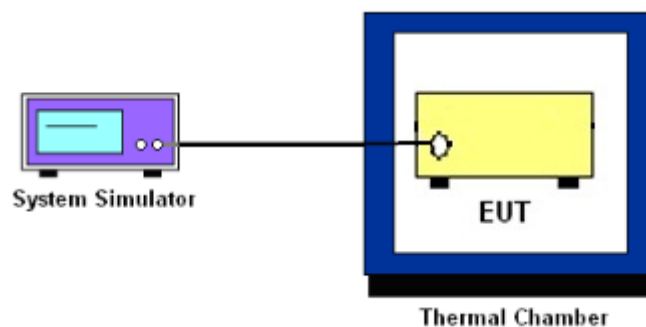

3.3 Test Result of Conducted Test

Please refer to Appendix A.



3.4 Conducted Output Power and ERP/EIRP

3.4.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for 5G NR n5.

The EIRP of mobile transmitters must not exceed 2 Watts for 5G NR n2, n7, n38, n41.

The EIRP of mobile transmitters must not exceed 1 Watts for 5G NR n66.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.



3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
 2. The EUT was connected to spectrum and system simulator via a power divider.
 3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
 4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
 5. Record the deviation as Peak to Average Ratio.
-
1. The testing follows ANSI C63.26 Section 5.2.6 (PAPR).
 2. The EUT was connected to spectrum and system simulator via a power divider.
 3. Set EUT in maximum power output.
 4. Set the RBW = 1MHz, VBW = 3MHz, Detector = Peak, Trace mode = max hold, Set span $\geq 2 \times$ OBW in spectrum analyzer.
 5. Set the RBW = 1MHz, VBW = 3MHz, Detector = power averaging, Trace mode = max hold, Set span $\geq 2 \times$ OBW in spectrum analyzer.
 6. Add $[10 \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission.
 7. $\text{PAPR (dB)} = P_{Pk} \text{ (dBm)} - P_{Avg} \text{ (dBm)}$
where
PAPR peak-to-average power ratio, in dB
 P_{Pk} measured peak power level, in dBm
 P_{Avg} measured average power level, in dBm
 8. Record the deviation as Peak to Average Ratio.



3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power P(Watts) in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

24.238 (a)

For operations in the 1850-1910 and 1930-1990 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power P(Watts) in a 1MHz bandwidth. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53 (h)

For operations in the 1710 – 1755 MHz and 1710 – 1780 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power P(Watts) in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53(m)(4)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.



3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW \geq 1%/2% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used or a narrower RBW was used (generally limited to no less than 1% of the OBW) and the measured power was integrated over the full required measurement bandwidth.
6. Set spectrum analyzer with RMS detector.
7. Offset has included the duty factor for Band n38/n41. Duty factor = $10 \log(1/x)$, where x is the measured duty cycle
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [43 + 10\log(P)]$ (dB)
= $[30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB) = -13dBm.

10. For 5G NR n7/n38/n41, the other 40 dB, and 55 dB have additionally applied same calculation above.
11. When using the integration method, the starting frequency of the integration shall be centered at one-half of the RBW away from the band edge.



3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For 5G NR n7/n38/n41:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Offset has included the duty factor for Band n38/n41. Duty factor = $10 \log (1/x)$, where x is the measured duty cycle
9. Taking the record of maximum spurious emission.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
11. The limit line is derived from $43 + 10 \log (P)$ dB below the transmitter power P(Watts)
= $P(W) - [43 + 10 \log (P)]$ (dB)
= $[30 + 10 \log (P)]$ (dBm) - $[43 + 10 \log (P)]$ (dB)
= -13dBm.
12. For 5G NR n7/n38/n41
The limit line is derived from $55 + 10 \log (P)$ dB below the transmitter power P(Watts)
= $P(W) - [55 + 10 \log (P)]$ (dB)
= $[30 + 10 \log (P)]$ (dBm) - $[55 + 10 \log (P)]$ (dB)
= -25dBm.



3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

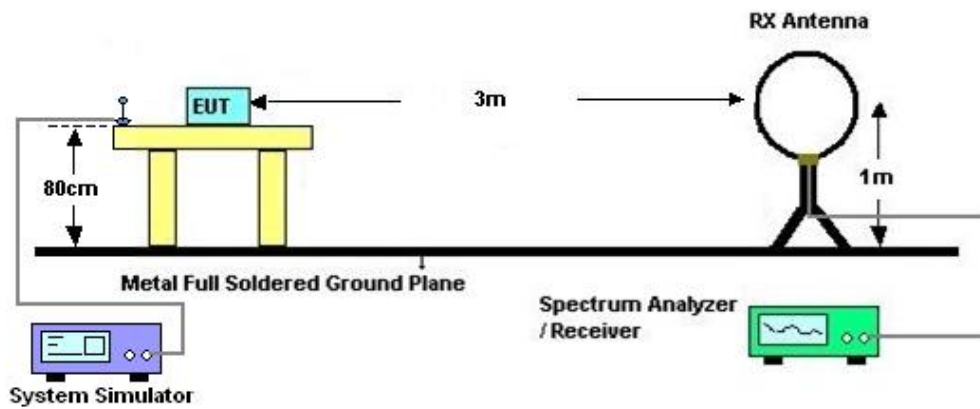

4.2.2 For radiated test from 30MHz to 1GHz

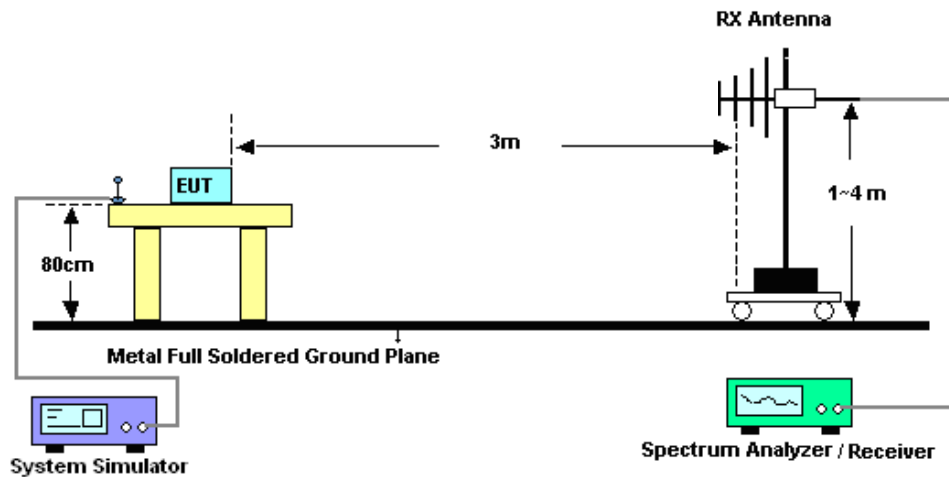

4.2.3 For radiated test above 1GHz

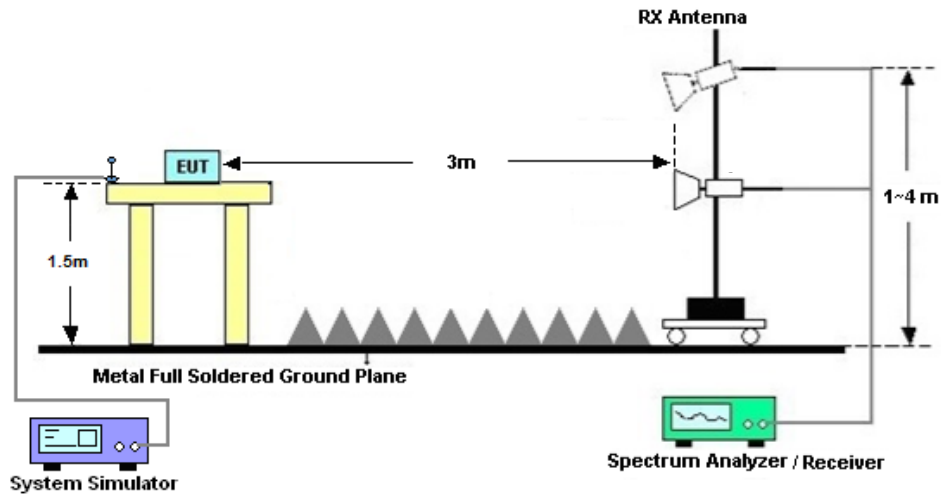

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.



4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For 5G NR n7/n38/n41

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP (dBm) = S.G. Power - Tx Cable Loss + Tx Antenna Gain$
11. $ERP (dBm) = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] (dB)$
 $= [30 + 10\log(P)] (dBm) - [43 + 10\log(P)] (dB)$
 $= -13dBm.$

13. For 5G NR n7/n38/n41:

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022	Nov. 07, 2022~ Dec. 16, 2022	Oct. 11, 2023	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	Aug. 26, 2022	Nov. 07, 2022~ Dec. 16, 2022	Aug. 25, 2023	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 15, 2022	Nov. 07, 2022~ Dec. 16, 2022	Jul. 14, 2023	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471079	10Hz-44G,MAX 30dB	Oct. 12, 2022	Nov. 24, 2022	Oct. 11, 2023	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 29, 2022	Nov. 24, 2022	Oct. 28, 2023	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz-1GHz	May 24, 2022	Nov. 24, 2022	May 23, 2023	Radiation (03CH04-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	1284	1GHz~18GHz	Jan. 05, 2022	Nov. 24, 2022	Jan. 04, 2023	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2022	Nov. 24, 2022	Jan. 04, 2023	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	Jan. 05, 2022	Nov. 24, 2022	Jan. 04, 2023	Radiation (03CH04-KS)
Amplifier	MITEQ	EM18G40G GA	060728	18~40GHz	Jan. 05, 2022	Nov. 24, 2022	Jan. 04, 2023	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18G A	060840	1Ghz-18Ghz	Oct. 12, 2022	Nov. 24, 2022	Oct. 11, 2023	Radiation (03CH04-KS)
Amplifier	Agilent	8449B	3008A02370	1Ghz-18Ghz	Oct. 12, 2022	Nov. 24, 2022	Oct. 11, 2023	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Nov. 24, 2022	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Nov. 24, 2022	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Nov. 24, 2022	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required



6 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±0.46 dB
Conducted Emissions	±0.48 dB
Occupied Channel Bandwidth	±0.1 %

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.3dB
---	-------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8dB
---	-------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8dB
---	-------

----- THE END -----



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power and ERP/EIRP)

5G NR n2:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Gain	EIRP	EIRP	EIRP
Channel				372000	376000	380000		L	M	H
Frequency (MHz)				1860	1880	1900				
20	PI/2 BPSK	1	1	22.68	22.78	22.56	-1.5	0.1312	0.1343	0.1276
20	QPSK	1	1	22.60	22.70	22.60	-1.5	0.1288	0.1318	0.1288
20	QPSK	1	53	22.66	22.66	22.54	-1.5	0.1306	0.1306	0.1271
20	QPSK	1	104	22.66	22.54	22.59	-1.5	0.1306	0.1271	0.1285
20	QPSK	50	0	20.36	20.34	20.27	-1.5	0.0769	0.0766	0.0753
20	QPSK	50	28	22.56	22.57	22.51	-1.5	0.1276	0.1279	0.1262
20	QPSK	50	56	20.41	20.36	20.28	-1.5	0.0778	0.0769	0.0755
20	QPSK	100	0	20.43	20.37	20.34	-1.5	0.0782	0.0771	0.0766
20	16QAM	1	1	20.43	20.29	20.46	-1.5	0.0782	0.0757	0.0787
20	64QAM	1	1	19.01	19.19	18.98	-1.5	0.0564	0.0587	0.0560
20	256QAM	1	1	16.48	16.57	16.40	-1.5	0.0315	0.0321	0.0309
Channel				371500	376000	380500	Gain	EIRP	EIRP	EIRP
Frequency (MHz)				1857.5	1880	1902.5				
15	PI/2 BPSK	1	1	22.58	22.69	22.56	-1.5	0.1282	0.1315	0.1276
15	QPSK	1	1	22.49	22.65	22.46	-1.5	0.1256	0.1303	0.1247
Channel				371000	376000	381000	Gain	EIRP	EIRP	EIRP
Frequency (MHz)				1855	1880	1905				
10	PI/2 BPSK	1	1	22.60	22.64	22.68	-1.5	0.1288	0.1300	0.1312
10	QPSK	1	1	22.47	22.58	22.45	-1.5	0.1250	0.1282	0.1245
Channel				370500	376000	381500	Gain	EIRP	EIRP	EIRP
Frequency (MHz)				1852.5	1880	1907.5				
5	PI/2 BPSK	1	1	22.70	22.59	22.60	-1.5	0.1318	0.1285	0.1288
5	QPSK	1	1	22.62	22.51	22.42	-1.5	0.1294	0.1262	0.1236



5G NR n5:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Gain	ERP	ERP	ERP
								L	M	H
Channel				166800	167300	167800				
Frequency (MHz)				834	836.5	839				
20	PI/2 BPSK	1	1	23.12	23.04	23.02	-5.1	0.0386	0.0379	0.0378
20	QPSK	1	1	23.19	23.11	23.03	-5.1	0.0393	0.0385	0.0378
20	QPSK	1	53	22.76	22.78	22.78	-5.1	0.0356	0.0357	0.0357
20	QPSK	1	104	22.73	22.65	22.63	-5.1	0.0353	0.0347	0.0345
20	QPSK	50	0	22.01	21.90	21.90	-5.1	0.0299	0.0292	0.0292
20	QPSK	50	28	22.83	22.82	22.93	-5.1	0.0361	0.0361	0.0370
20	QPSK	50	56	21.84	21.88	21.81	-5.1	0.0288	0.0290	0.0286
20	QPSK	100	0	21.93	21.92	22.14	-5.1	0.0294	0.0293	0.0308
20	16QAM	1	1	22.13	22.26	22.02	-5.1	0.0308	0.0317	0.0300
20	64QAM	1	1	20.88	20.52	20.78	-5.1	0.0231	0.0212	0.0225
20	256QAM	1	1	18.41	18.37	18.31	-5.1	0.0131	0.0129	0.0128
Channel				166300	167300	168300	Gain	ERP	ERP	ERP
Frequency (MHz)				831.5	836.5	841.5				
15	PI/2 BPSK	1	1	23.08	23.01	22.88	-5.1	0.0383	0.0377	0.0366
15	QPSK	1	1	23.15	23.03	22.86	-5.1	0.0389	0.0378	0.0364
Channel				165800	167300	168800	Gain	ERP	ERP	ERP
Frequency (MHz)				829	836.5	844				
10	PI/2 BPSK	1	1	22.90	22.83	23.06	-5.1	0.0367	0.0362	0.0381
10	QPSK	1	1	22.78	22.80	22.91	-5.1	0.0357	0.0359	0.0368
Channel				165300	167300	169300	Gain	ERP	ERP	ERP
Frequency (MHz)				826.5	836.5	846.5				
5	PI/2 BPSK	1	1	22.80	22.77	22.79	-5.1	0.0359	0.0356	0.0358
5	QPSK	1	1	22.67	22.75	22.64	-5.1	0.0348	0.0355	0.0346



5G NR n7:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Gain	EIRP	EIRP	EIRP
Channel				504000	507000	510000	Gain	EIRP	EIRP	EIRP
Frequency (MHz)				2520	2535	2550				
40	PI/2 BPSK	1	1	23.05	23.11	23.01	-3.80	0.0841	0.0853	0.0834
40	QPSK	1	1	23.13	23.16	23.04	-3.80	0.0857	0.0863	0.0839
40	QPSK	1	108	23.08	23.36	23.13	-3.80	0.0847	0.0904	0.0857
40	QPSK	1	215	22.32	22.35	22.21	-3.80	0.0711	0.0716	0.0693
40	QPSK	108	0	22.22	22.27	22.26	-3.80	0.0695	0.0703	0.0701
40	QPSK	108	54	23.01	23.31	23.20	-3.80	0.0834	0.0893	0.0871
40	QPSK	108	108	22.23	22.46	22.33	-3.80	0.0697	0.0735	0.0713
40	QPSK	216	0	22.25	22.35	22.23	-3.80	0.0700	0.0716	0.0697
40	16QAM	1	1	22.09	22.25	22.26	-3.80	0.0675	0.0700	0.0701
40	64QAM	1	1	20.85	20.87	20.62	-3.80	0.0507	0.0509	0.0481
40	256QAM	1	1	18.28	18.33	18.40	-3.80	0.0281	0.0284	0.0288
Channel				503000	507000	511000	Gain	EIRP	EIRP	EIRP
Frequency (MHz)				2515	2535	2555				
30	PI/2 BPSK	1	1	23.10	23.09	23.08	-3.80	0.0851	0.0849	0.0847
30	QPSK	1	1	23.08	23.11	23.00	-3.80	0.0847	0.0853	0.0832
Channel				502500	507000	511500	Gain	EIRP	EIRP	EIRP
Frequency (MHz)				2512.5	2535	2557.5				
25	PI/2 BPSK	1	1	23.05	23.05	23.03	-3.80	0.0841	0.0841	0.0838
25	QPSK	1	1	23.10	23.11	23.08	-3.80	0.0851	0.0853	0.0847
Channel				502000	507000	512000	Gain	EIRP	EIRP	EIRP
Frequency (MHz)				2510	2535	2560				
20	PI/2 BPSK	1	1	23.10	23.02	23.09	-3.80	0.0851	0.0836	0.0849
20	QPSK	1	1	23.11	23.12	23.05	-3.80	0.0853	0.0855	0.0841
Channel				501500	507000	512500	Gain	EIRP	EIRP	EIRP
Frequency (MHz)				2507.5	2535	2562.5				
15	PI/2 BPSK	1	1	23.05	23.08	23.10	-3.80	0.0841	0.0847	0.0851
15	QPSK	1	1	23.13	23.05	22.98	-3.80	0.0857	0.0841	0.0828
Channel				501000	507000	513000	Gain	EIRP	EIRP	EIRP
Frequency (MHz)				2505	2535	2565				
10	PI/2 BPSK	1	1	23.10	23.06	23.05	-3.80	0.0851	0.0843	0.0841
10	QPSK	1	1	23.06	23.11	23.05	-3.80	0.0843	0.0853	0.0841
Channel				500500	507000	513500	Gain	EIRP	EIRP	EIRP
Frequency (MHz)				2502.5	2535	2567.5				
5	PI/2 BPSK	1	1	23.02	23.05	23.10	-3.80	0.0836	0.0841	0.0851
5	QPSK	1	1	22.80	23.12	22.98	-3.80	0.0794	0.0855	0.0828



5G NR n38:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Gain	EIRP	EIRP	EIRP
Channel				518000	519000	520000		L	M	H
Frequency (MHz)				2590	2595	2600				
40	PI/2 BPSK	1	1	23.41	23.65	23.32	-3.3	0.1026	0.1084	0.1005
40	QPSK	1	1	23.47	23.45	23.51	-3.3	0.1040	0.1035	0.1050
40	QPSK	1	53	23.40	23.35	23.58	-3.3	0.1023	0.1012	0.1067
40	QPSK	1	104	23.71	23.78	23.82	-3.3	0.1099	0.1117	0.1127
40	QPSK	50	0	21.40	21.30	21.55	-3.3	0.0646	0.0631	0.0668
40	QPSK	50	28	23.41	23.42	23.50	-3.3	0.1026	0.1028	0.1047
40	QPSK	50	56	21.50	21.68	21.60	-3.3	0.0661	0.0689	0.0676
40	QPSK	100	0	21.41	21.41	21.60	-3.3	0.0647	0.0647	0.0676
40	16QAM	1	1	21.18	21.20	21.35	-3.3	0.0614	0.0617	0.0638
40	64QAM	1	1	19.78	19.42	19.51	-3.3	0.0445	0.0409	0.0418
40	256QAM	1	1	17.92	17.78	17.63	-3.3	0.0290	0.0281	0.0271
Channel				517000	519000	521000	Gain	EIRP	EIRP	EIRP
Frequency (MHz)				2585	2595	2605				
30	PI/2 BPSK	1	1	23.35	23.56	23.61	-3.3	0.1012	0.1062	0.1074
30	QPSK	1	1	23.22	23.42	23.41	-3.3	0.0982	0.1028	0.1026
Channel				516000	519000	522000	Gain	EIRP	EIRP	EIRP
Frequency (MHz)				2580	2595	2610				
20	PI/2 BPSK	1	1	23.54	23.62	23.58	-3.3	0.1057	0.1076	0.1067
20	QPSK	1	1	23.14	23.41	23.44	-3.3	0.0964	0.1026	0.1033
Channel				515500	519000	522500	Gain	EIRP	EIRP	EIRP
Frequency (MHz)				2577.5	2595	2612.5				
15	PI/2 BPSK	1	1	23.62	23.54	23.60	-3.3	0.1076	0.1057	0.1072
15	QPSK	1	1	23.14	23.21	23.24	-3.3	0.0964	0.0979	0.0986
Channel				515000	519000	523000	Gain	EIRP	EIRP	EIRP
Frequency (MHz)				2575	2595	2615				
10	PI/2 BPSK	1	1	23.62	23.60	23.61	-3.3	0.1076	0.1072	0.1074
10	QPSK	1	1	23.46	23.42	23.39	-3.3	0.1038	0.1028	0.1021
10	16QAM	1	1	21.25	21.20	21.11	-3.3	0.0624	0.0617	0.0604



5G NR n41:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Gain	EIRP	EIRP	EIRP
Channel				509202	518598	528000				
Frequency (MHz)				2546.01	2592.99	2640		L	M	H
100	PI/2 BPSK	1	1	23.69	23.75	23.55	-3.30	0.1094	0.1109	0.1059
100	QPSK	1	1	23.77	23.67	23.87	-3.30	0.1114	0.1089	0.1140
100	QPSK	1	137	23.85	23.90	23.77	-3.30	0.1135	0.1148	0.1114
100	QPSK	1	271	23.80	23.91	23.92	-3.30	0.1122	0.1151	0.1153
100	QPSK	135	0	21.50	21.40	21.65	-3.30	0.0661	0.0646	0.0684
100	QPSK	135	69	23.64	23.56	23.82	-3.30	0.1081	0.1062	0.1127
100	QPSK	135	138	21.72	21.77	21.86	-3.30	0.0695	0.0703	0.0718
100	QPSK	270	0	21.61	21.58	21.70	-3.30	0.0678	0.0673	0.0692
100	16QAM	1	1	21.30	21.13	21.46	-3.30	0.0631	0.0607	0.0655
100	64QAM	1	1	19.83	19.60	19.72	-3.30	0.0450	0.0427	0.0439
100	256QAM	1	1	17.92	17.80	17.83	-3.30	0.0290	0.0282	0.0284
Channel				508200	518598	528996	Gain	EIRP	EIRP	EIRP
Frequency (MHz)				2541	2592.99	2644.98				
90	PI/2 BPSK	1	1	23.51	23.42	23.35	-3.30	0.1050	0.1028	0.1012
90	QPSK	1	1	23.43	23.35	23.34	-3.30	0.1030	0.1012	0.1009
Channel				507204	518598	529998	Gain	EIRP	EIRP	EIRP
Frequency (MHz)				2536.02	2592.99	2649.99				
80	PI/2 BPSK	1	1	23.30	23.30	23.50	-3.30	0.1000	0.1000	0.1047
80	QPSK	1	1	23.14	23.24	23.51	-3.30	0.0964	0.0986	0.1050
Channel				506202	518598	531000	Gain	EIRP	EIRP	EIRP
Frequency (MHz)				2531.01	2592.99	2565				
70	PI/2 BPSK	1	1	23.47	23.41	23.49	-3.30	0.1040	0.1026	0.1045
70	QPSK	1	1	23.41	23.34	23.62	-3.30	0.1026	0.1009	0.1076
Channel				505200	518598	531996	Gain	EIRP	EIRP	EIRP
Frequency (MHz)				2526	2592.99	2659.98				
60	PI/2 BPSK	1	1	23.72	23.64	23.67	-3.30	0.1102	0.1081	0.1089
60	QPSK	1	1	23.45	23.56	23.41	-3.30	0.1035	0.1062	0.1026
Channel				504204	518598	532998	Gain	EIRP	EIRP	EIRP
Frequency (MHz)				2521.02	2592.99	2664.99				
50	PI/2 BPSK	1	1	23.64	23.54	23.72	-3.30	0.1081	0.1057	0.1102
50	QPSK	1	1	23.50	23.41	23.46	-3.30	0.1047	0.1026	0.1038
Channel				503202	518598	534000	Gain	EIRP	EIRP	EIRP
Frequency (MHz)				2516.01	2592.99	2670				
40	PI/2 BPSK	1	1	23.70	23.68	23.71	-3.30	0.1096	0.1091	0.1099
40	QPSK	1	1	23.51	23.60	23.54	-3.30	0.1050	0.1072	0.1057
Channel				502200	518598	534996	Gain	EIRP	EIRP	EIRP
Frequency (MHz)				2511	2592.99	2674.98				
30	PI/2 BPSK	1	1	23.69	23.62	23.72	-3.30	0.1094	0.1076	0.1102
30	QPSK	1	1	23.46	23.52	23.45	-3.30	0.1038	0.1052	0.1035
Channel				501204	518598	535998	Gain	EIRP	EIRP	EIRP
Frequency (MHz)				2506.02	2592.99	2679.99				
20	PI/2 BPSK	1	1	23.63	23.71	23.69	-3.30	0.1079	0.1099	0.1094
20	QPSK	1	1	23.62	23.62	23.46	-3.30	0.1076	0.1076	0.1038



5G NR n66:


BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Gain	EIRP	EIRP	EIRP
Channel				346000	349000	352000		L	M	H
Frequency (MHz)				1730	1745	1760				
40	PI/2 BPSK	1	1	22.79	22.85	22.81	-1.20	0.1442	0.1462	0.1449
40	QPSK	1	1	22.89	22.97	22.81	-1.20	0.1476	0.1503	0.1449
40	QPSK	1	108	22.67	22.33	22.86	-1.20	0.1403	0.1297	0.1466
40	QPSK	1	214	22.50	22.62	22.77	-1.20	0.1349	0.1387	0.1435
40	QPSK	108	0	21.78	21.53	21.83	-1.20	0.1143	0.1079	0.1156
40	QPSK	108	54	22.65	22.51	22.77	-1.20	0.1396	0.1352	0.1435
40	QPSK	108	108	21.75	21.76	21.95	-1.20	0.1135	0.1138	0.1189
40	QPSK	216	0	21.73	21.74	21.81	-1.20	0.1130	0.1132	0.1151
40	16QAM	1	1	21.90	21.69	21.80	-1.20	0.1175	0.1119	0.1148
40	64QAM	1	1	20.45	20.17	20.28	-1.20	0.0841	0.0789	0.0809
40	256QAM	1	1	18.08	17.75	17.98	-1.20	0.0488	0.0452	0.0476
Channel				345000	349000	353000	Gain	EIRP	EIRP	EIRP
Frequency (MHz)				1725	1745	1765				
30	PI/2 BPSK	1	1	22.63	22.65	22.68	-1.20	0.1390	0.1396	0.1406
30	QPSK	1	1	22.87	22.67	22.68	-1.20	0.1469	0.1403	0.1406
Channel				344000	349000	354000	Gain	EIRP	EIRP	EIRP
Frequency (MHz)				1720	1745	1770				
20	PI/2 BPSK	1	1	22.74	22.82	22.68	-1.20	0.1426	0.1452	0.1406
20	QPSK	1	1	22.54	22.62	22.47	-1.20	0.1361	0.1387	0.1340
Channel				343500	349000	354500	Gain	EIRP	EIRP	EIRP
Frequency (MHz)				1717.5	1745	1772.5				
15	PI/2 BPSK	1	1	22.75	22.52	22.79	-1.20	0.1429	0.1355	0.1442
15	QPSK	1	1	22.68	22.71	22.85	-1.20	0.1406	0.1416	0.1462
Channel				343000	349000	355000	Gain	EIRP	EIRP	EIRP
Frequency (MHz)				1715	1745	1775				
10	PI/2 BPSK	1	1	22.81	22.69	22.79	-1.20	0.1449	0.1409	0.1442
10	QPSK	1	1	22.70	22.43	22.62	-1.20	0.1413	0.1327	0.1387
Channel				342500	349000	355500	Gain	EIRP	EIRP	EIRP
Frequency (MHz)				1712.5	1745	1777.5				
5	PI/2 BPSK	1	1	22.77	22.64	22.78	-1.20	0.1435	0.1393	0.1439
5	QPSK	1	1	22.62	22.50	22.63	-1.20	0.1387	0.1349	0.1390



FR1 n2

Peak-to-Average Ratio

Mode	FR1 n2 / 20MHz / DFT-S OFDM				
Mod.	PI/2 BPSK	QPSK			Limit: 13dB
RB Size	Full RB	Full RB			Result
Middle CH	5.48	5.57			PASS

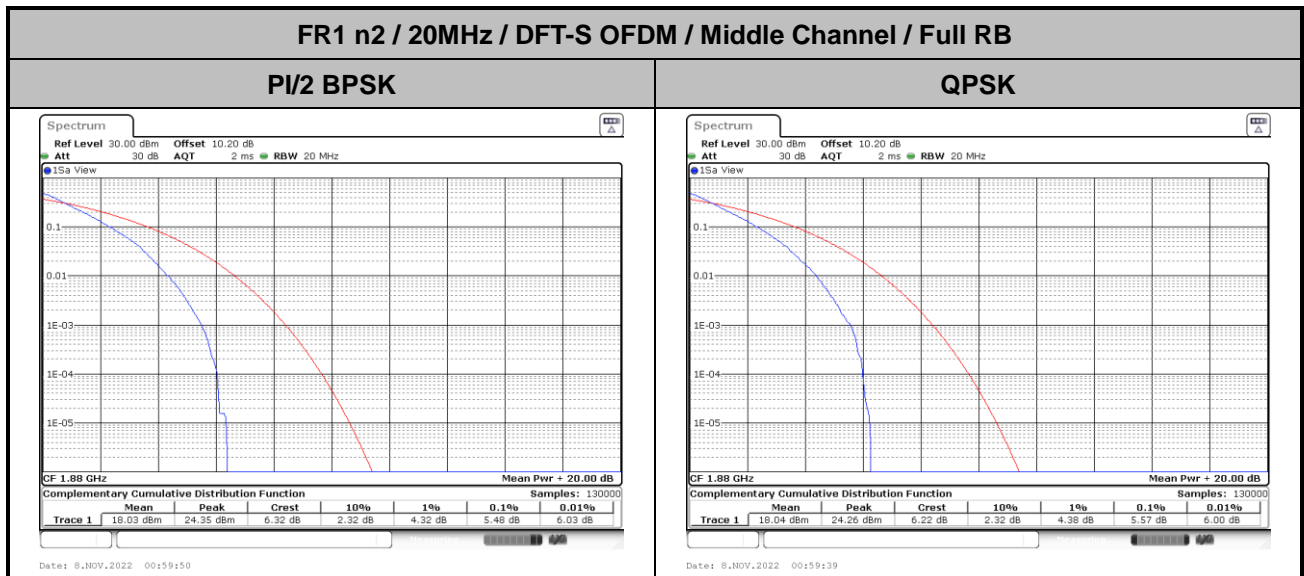




26dB Bandwidth

Mode	FR1 n2 : 26dBW (MHz) / CP OFDM			
BW	5MHz	10MHz	15MHz	20MHz
Mod.	QPSK	QPSK	QPSK	QPSK
Middle CH	5.17	9.81	14.30	18.98
BW	5MHz	10MHz	15MHz	20MHz
Mod.	16QAM	16QAM	16QAM	16QAM
Middle CH	5.10	9.95	14.36	18.78
BW	5MHz	10MHz	15MHz	20MHz
Mod.	64QAM	64QAM	64QAM	64QAM
Middle CH	5.07	9.97	14.27	18.74
BW	5MHz	10MHz	15MHz	20MHz
Mod.	256QAM	256QAM	256QAM	256QAM
Middle CH	5.07	10.07	14.57	18.82




FR1 n2 / 5MHz / CP OFDM / Middle Channel / Full RB

QPSK

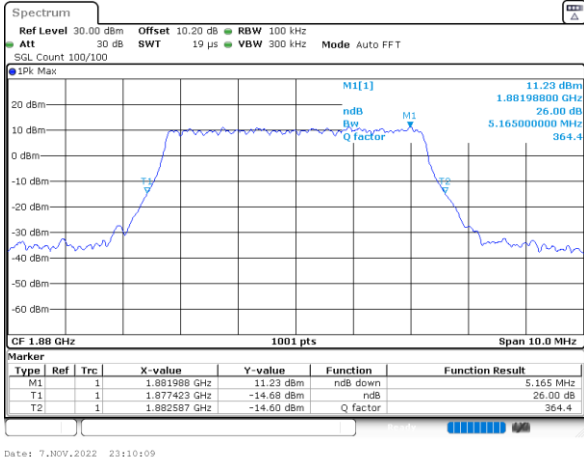


Date: 7,NOV,2022 23:10:09

16QAM

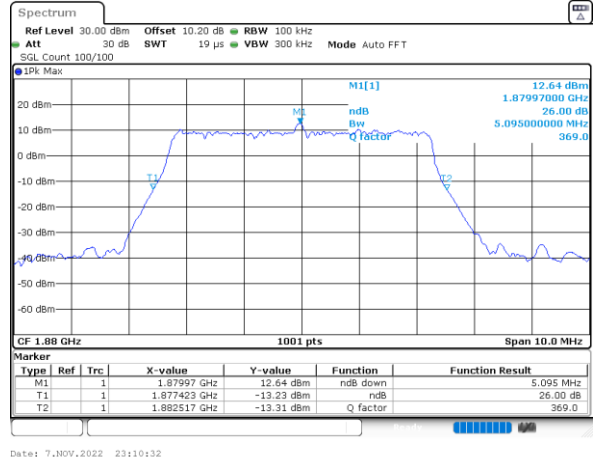


Date: 7,NOV,2022 23:10:32

64QAM

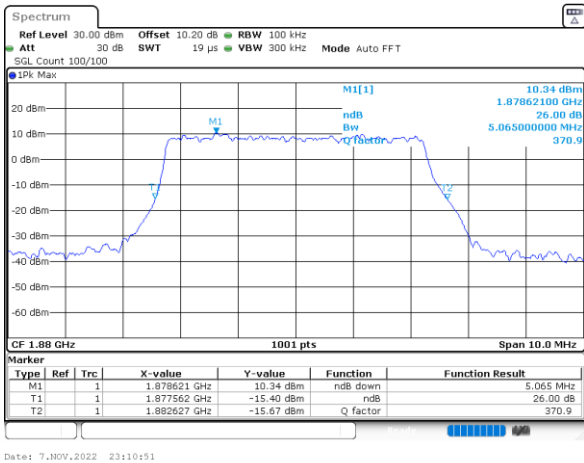

Date: 7,NOV,2022 23:10:51

256QAM

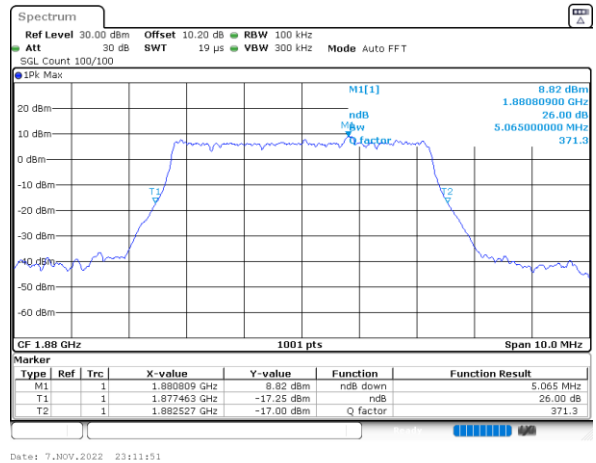


Date: 7,NOV,2022 23:11:51




FR1 n2 / 10MHz / CP OFDM / Middle Channel / Full RB

QPSK

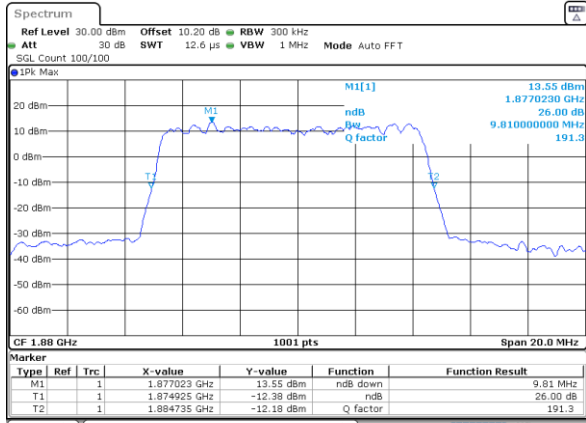


Date: 7,NOV,2022 23:23:14

16QAM

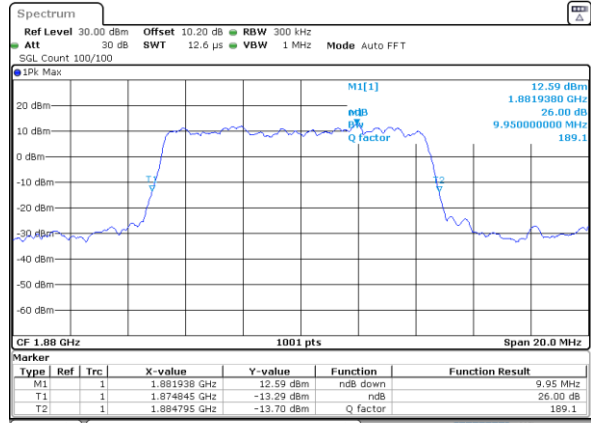


Date: 7,NOV,2022 23:23:32

64QAM

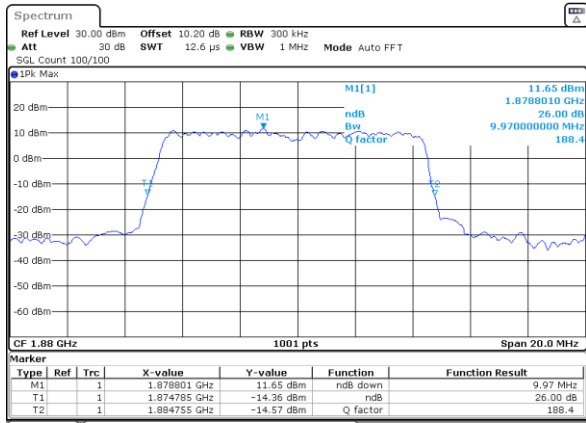

Date: 7,NOV,2022 23:23:57

256QAM

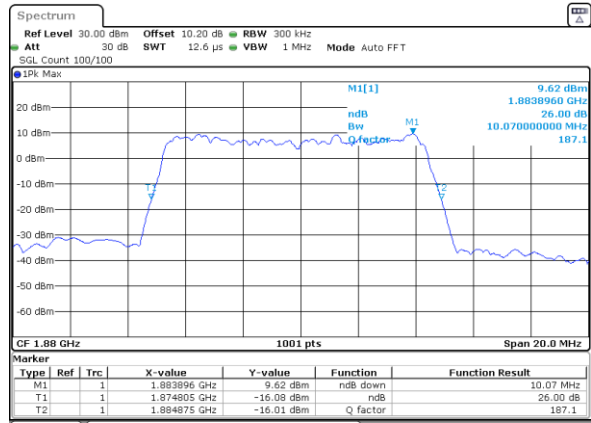


Date: 7,NOV,2022 23:24:44




FR1 n2 / 15MHz / CP OFDM / Middle Channel / Full RB

QPSK

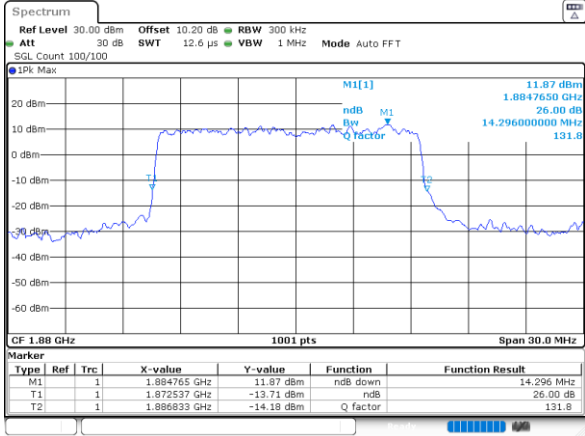


Date: 8.NOV.2022 00:54:27

16QAM

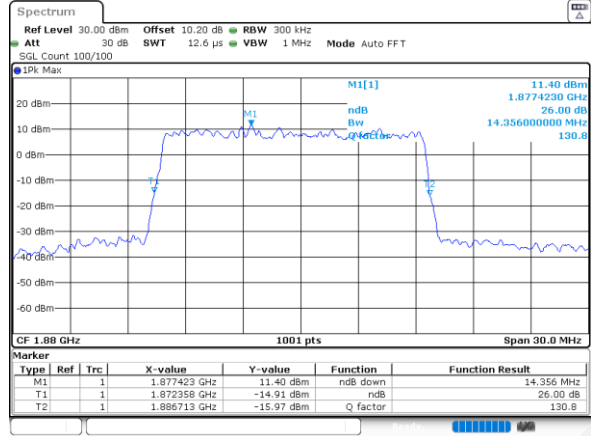


Date: 8.NOV.2022 00:54:49

64QAM

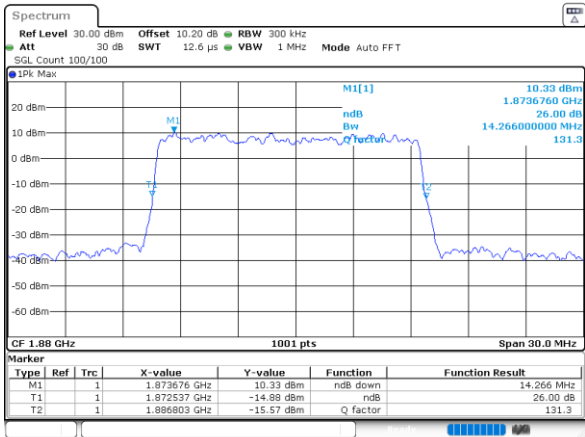

Date: 8.NOV.2022 00:55:06

256QAM

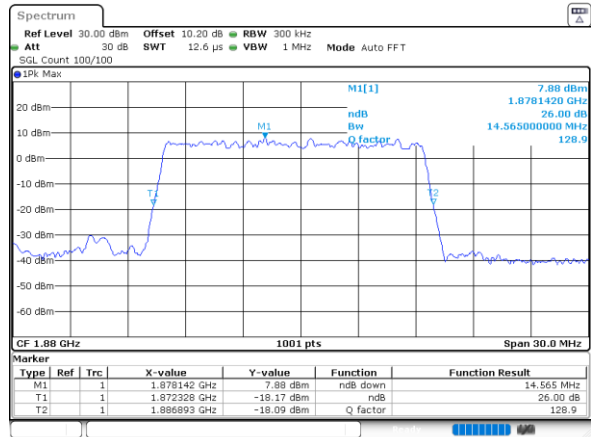


Date: 8.NOV.2022 00:55:48




FR1 n2 / 20MHz / CP OFDM / Middle Channel / Full RB

QPSK

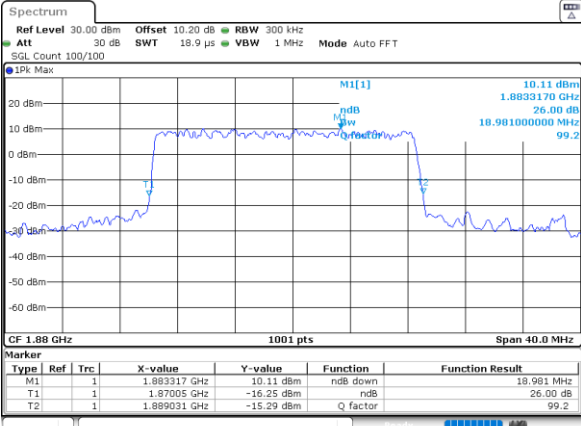


Date: 8,NOV,2022 00:57:48

16QAM

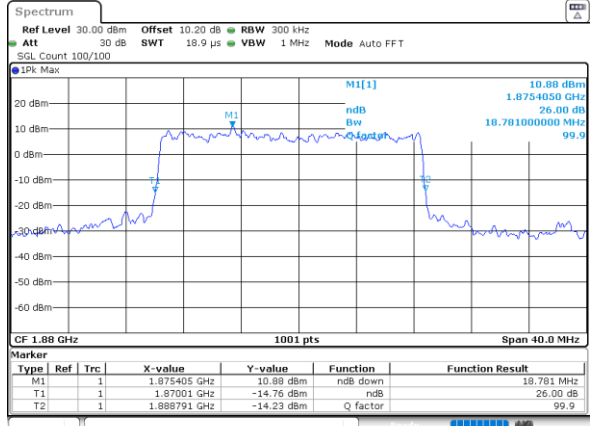


Date: 8,NOV,2022 00:58:12

64QAM

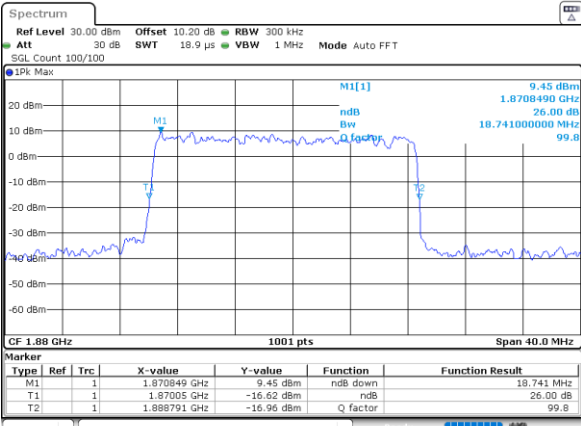

Date: 8,NOV,2022 00:58:30

256QAM

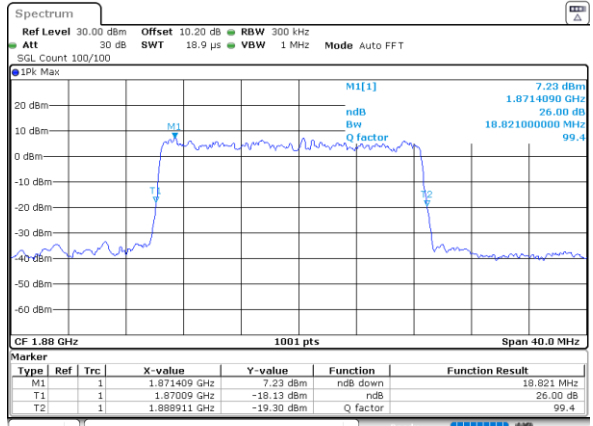

Date: 8,NOV,2022 00:58:46




Occupied Bandwidth

Mode	FR1 n2 : 99%OBW (MHz) / CP OFDM			
BW	5MHz	10MHz	15MHz	20MHz
Mod.	QPSK	QPSK	QPSK	QPSK
Middle CH	4.48	9.05	13.49	17.94
BW	5MHz	10MHz	15MHz	20MHz
Mod.	16QAM	16QAM	16QAM	16QAM
Middle CH	4.52	9.09	13.49	17.90
BW	5MHz	10MHz	15MHz	20MHz
Mod.	64QAM	64QAM	64QAM	64QAM
Middle CH	4.49	9.01	13.46	17.94
BW	5MHz	10MHz	15MHz	20MHz
Mod.	256QAM	256QAM	256QAM	256QAM
Middle CH	4.49	9.07	13.46	17.94




FR1 n2 / 5MHz / CP OFDM / Middle Channel / Full RB

QPSK

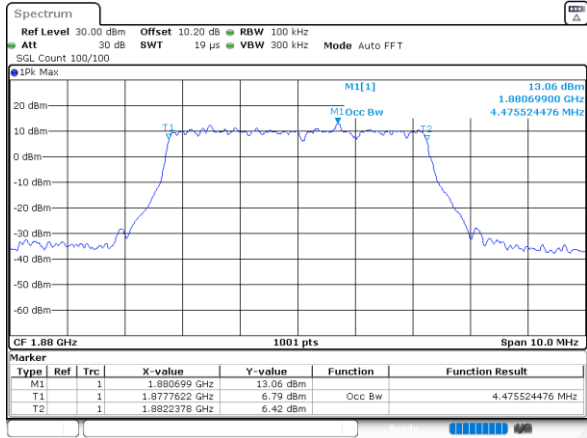


Date: 7.NOV.2022 23:09:59

16QAM

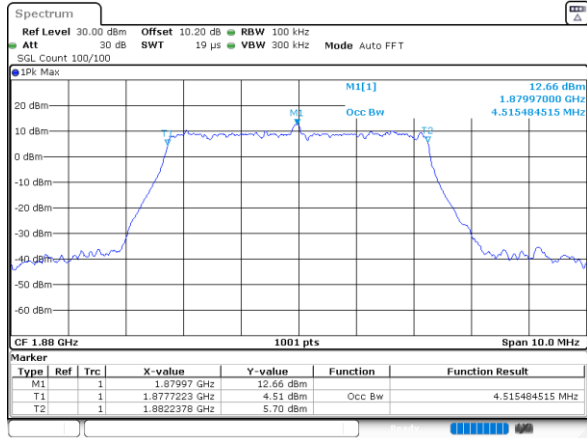


Date: 7.NOV.2022 23:10:27

64QAM

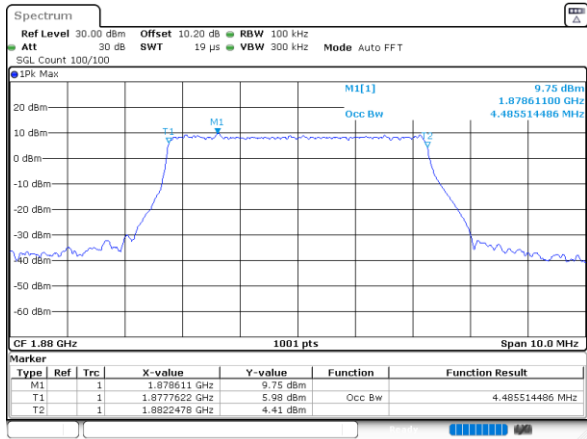

Date: 7.NOV.2022 23:10:46

256QAM

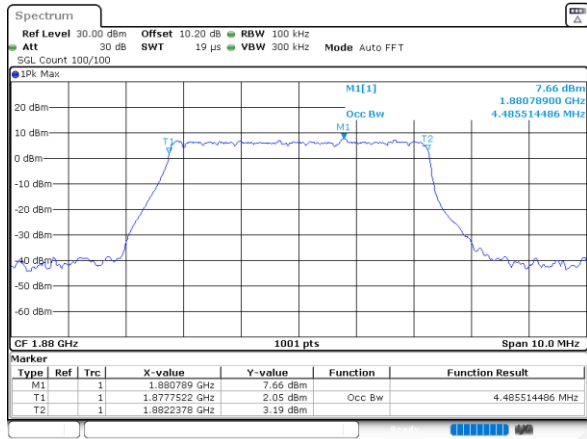


Date: 7.NOV.2022 23:11:46




FR1 n2 / 10MHz / CP OFDM / Middle Channel / Full RB

QPSK

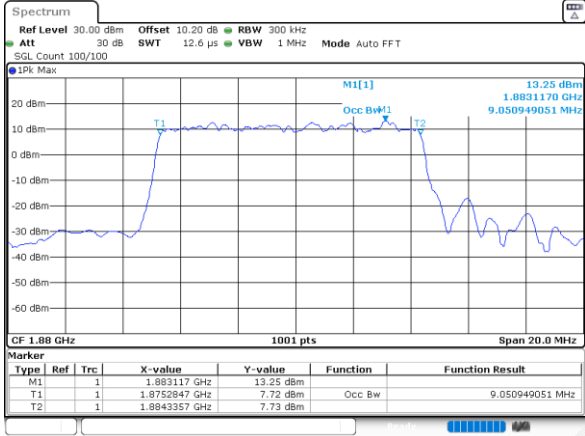


Date: 7,NOV,2022 23:23:09

16QAM

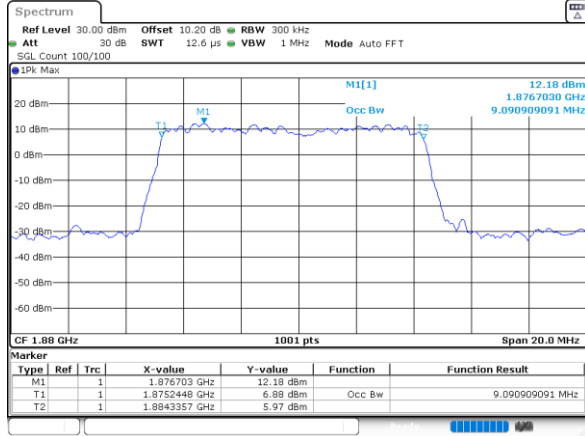


Date: 7,NOV,2022 23:23:27

64QAM

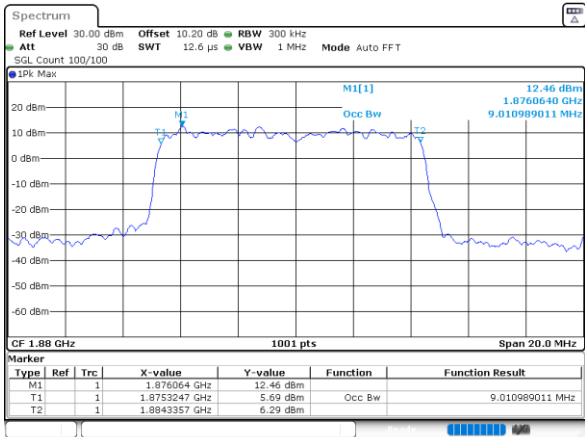

Date: 7,NOV,2022 23:23:51

256QAM

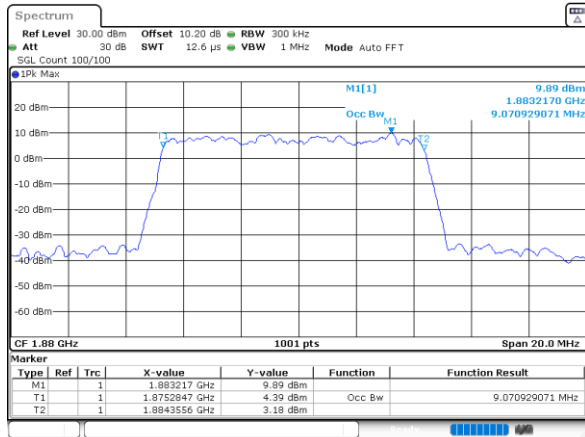


Date: 7,NOV,2022 23:24:34




FR1 n2 / 15MHz / CP OFDM / Middle Channel / Full RB

QPSK

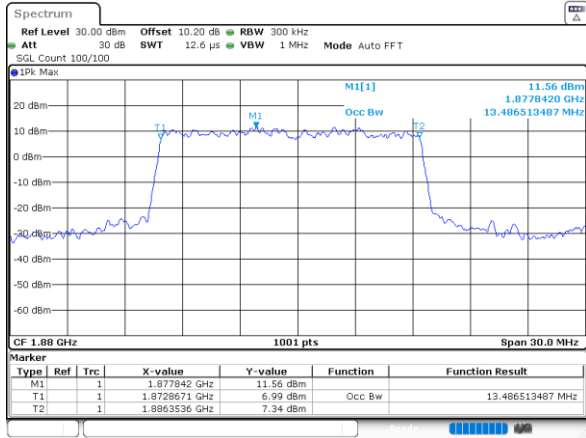


Date: 8.NOV.2022 00:15:22

16QAM

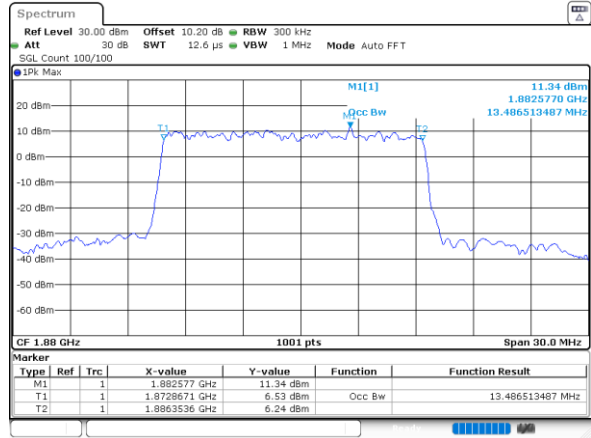


Date: 8.NOV.2022 00:15:44

64QAM

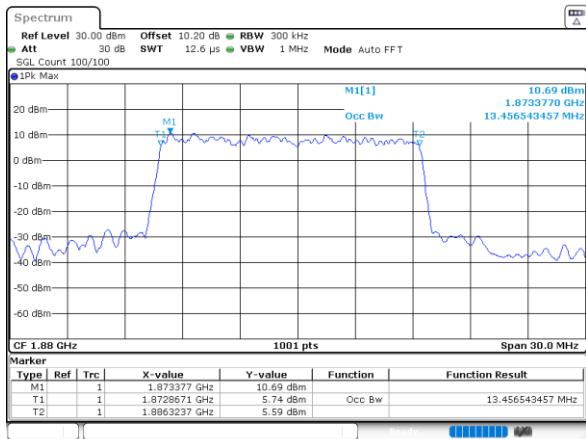

Date: 8.NOV.2022 00:15:02

256QAM

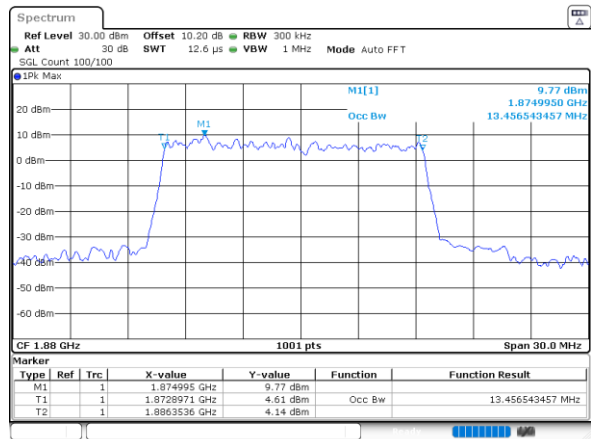


Date: 8.NOV.2022 00:15:43




FR1 n2 / 20MHz / CP OFDM / Middle Channel / Full RB

QPSK

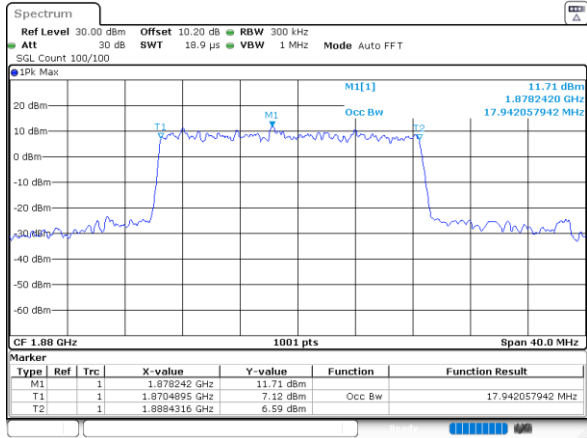


Date: 8.NOV.2022 00:57:43

16QAM

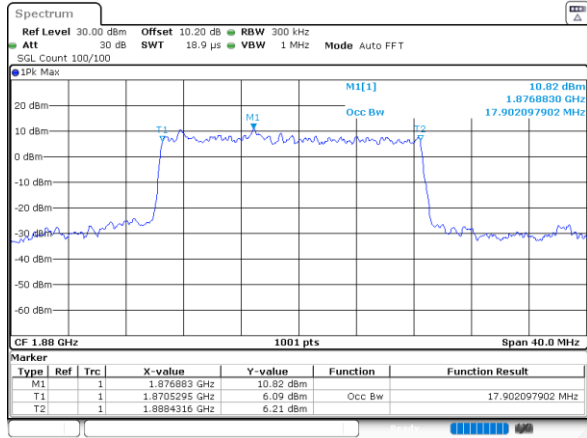


Date: 8.NOV.2022 00:58:08

64QAM

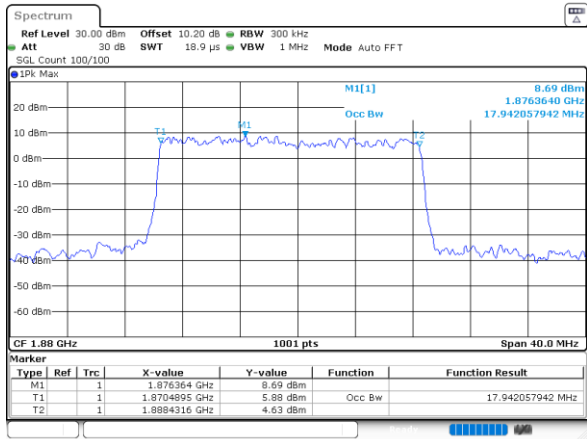

Date: 8.NOV.2022 00:58:25

256QAM

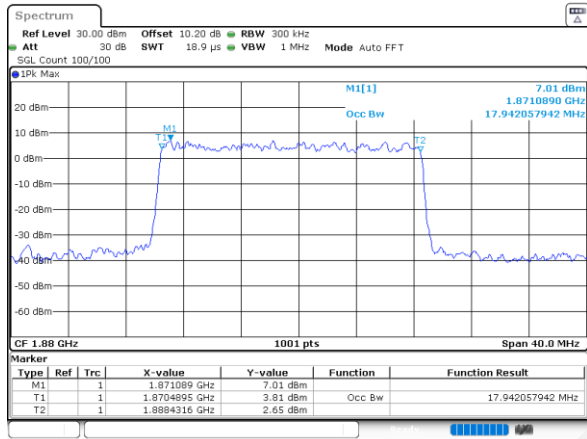

Date: 8.NOV.2022 00:58:42





Conducted Band Edge

FR1 n2 / 5MHz / DFT-S OFDM / PI/2 BPSK



Lowest Band Edge / 1RB0

Highest Band Edge / 1RBmax

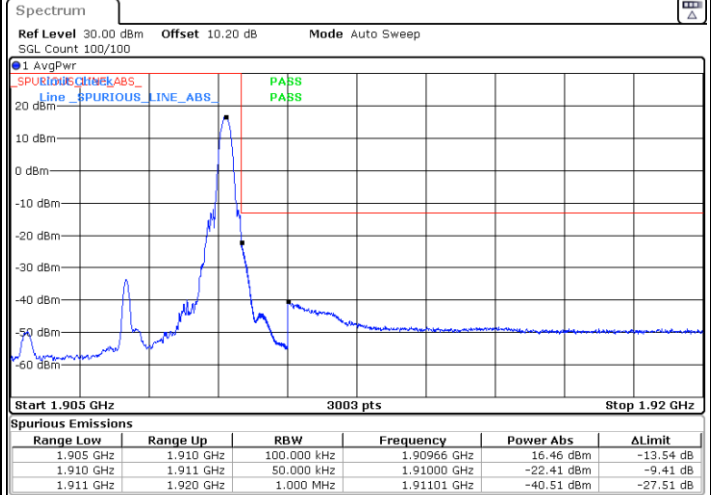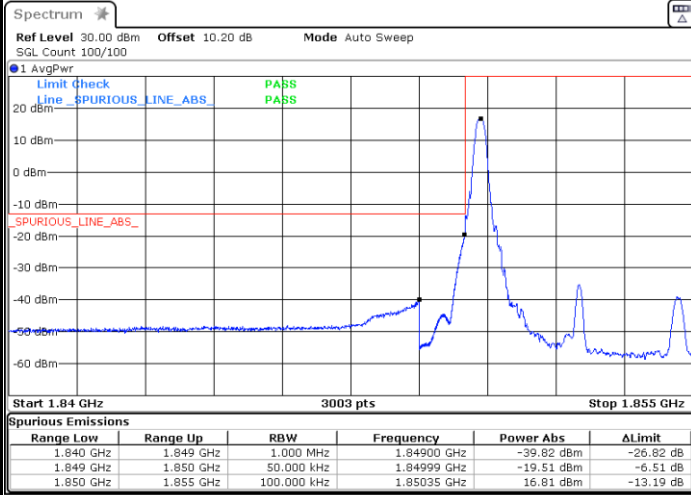

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

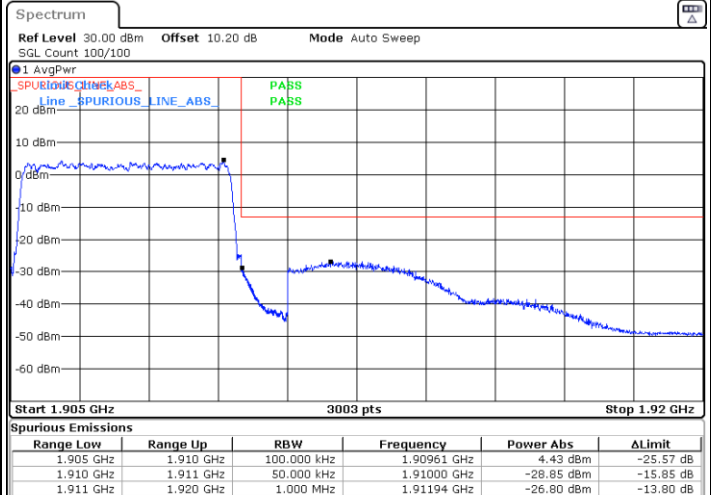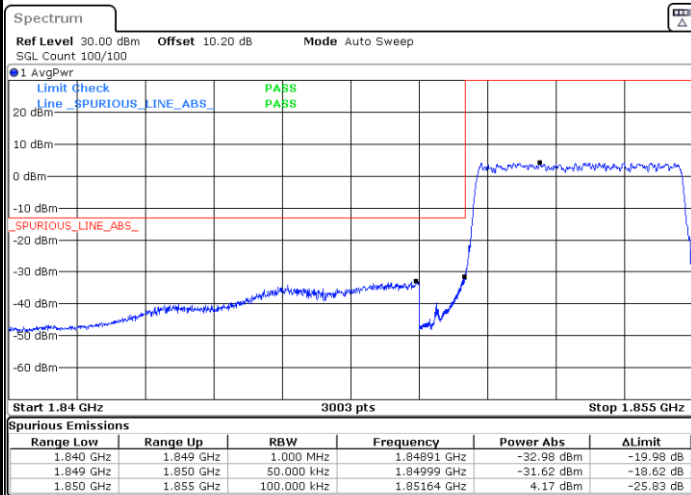





FR1 n2 / 5MHz / DFT-S OFDM / QPSK

Lowest Band Edge / 1RB0

Highest Band Edge / 1RBmax

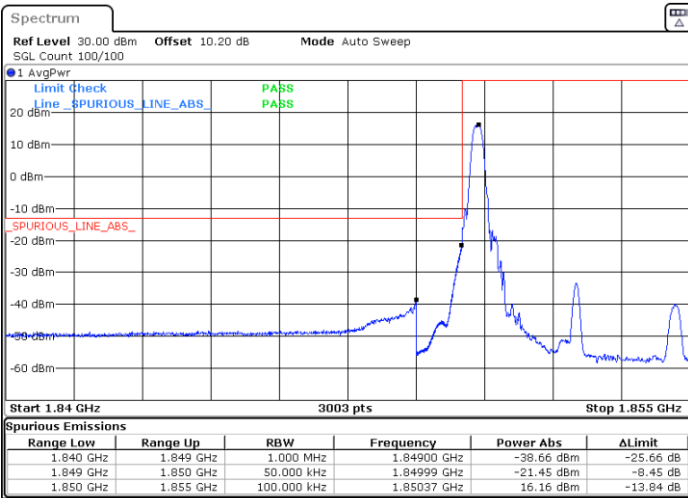


Date: 7.NOV.2022 22:56:10

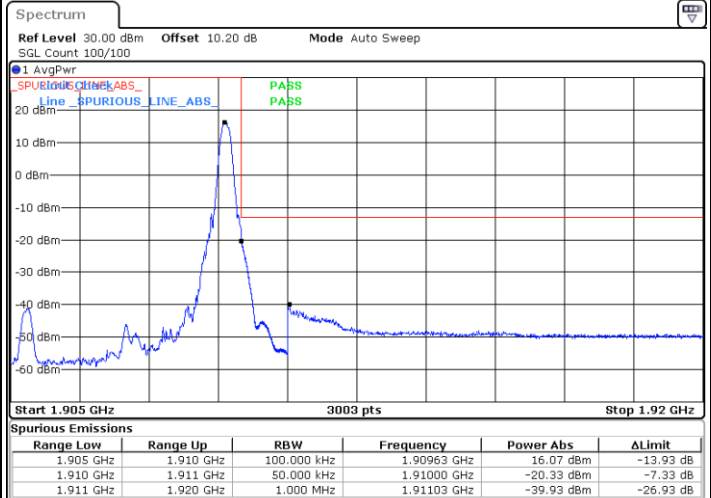


Date: 21.NOV.2022 14:48:52

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

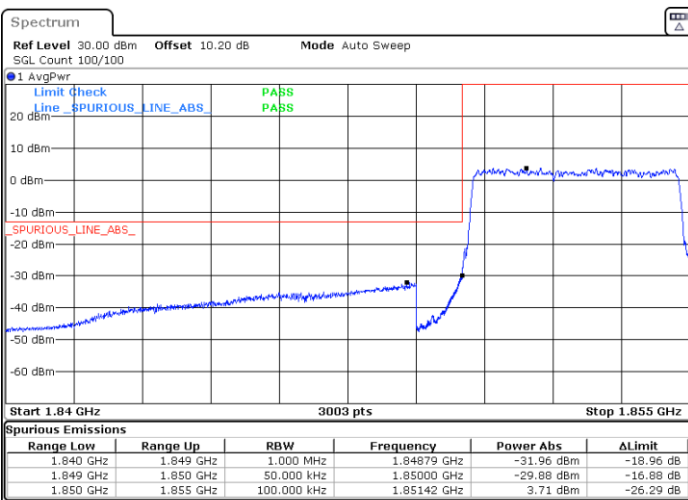

Date: 7.NOV.2022 22:56:55

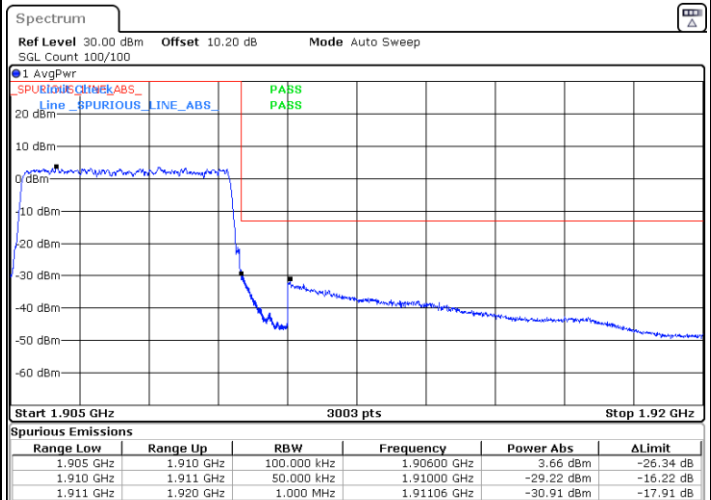



Date: 7.NOV.2022 23:14:15



FR1 n2 / 10MHz / DFT-s-OFDM / PI/2 BPSK

Lowest Band Edge / 1RB0

Highest Band Edge / 1RBmax

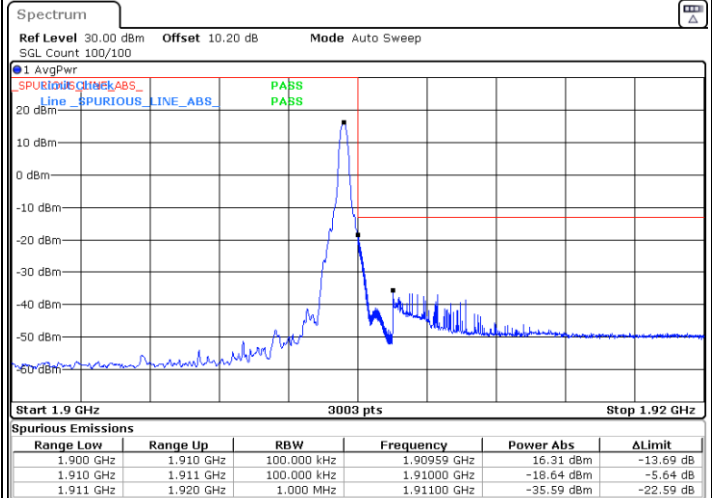
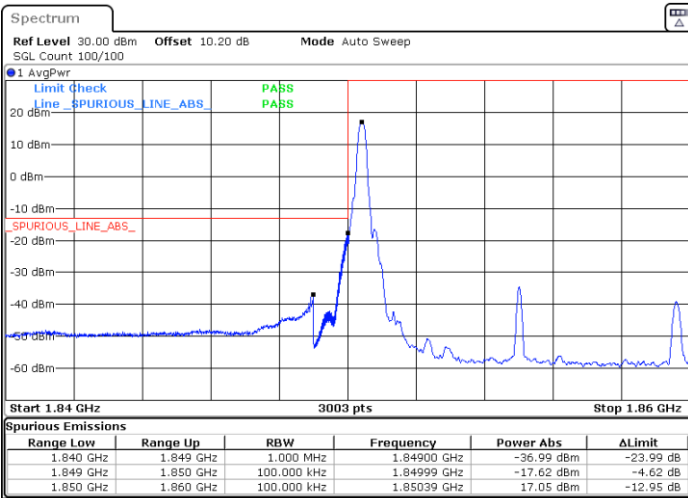


Date: 7.NOV.2022 23:21:16

Date: 7.NOV.2022 23:28:21

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

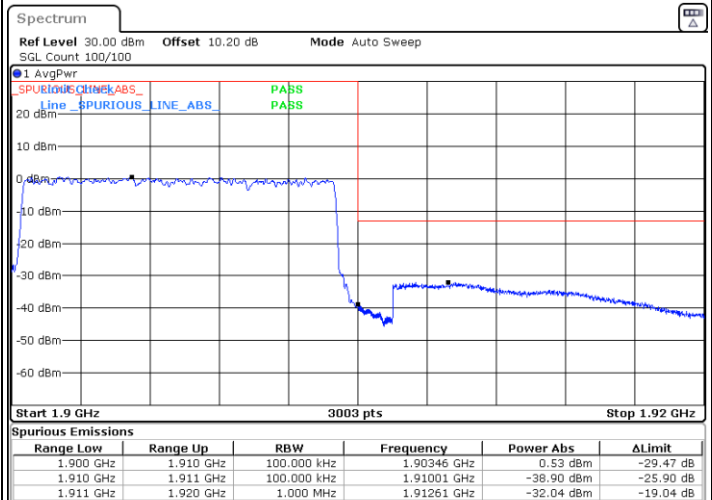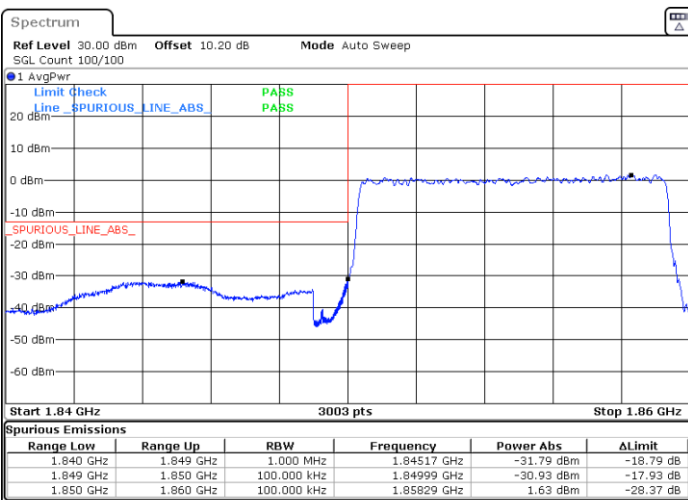

Date: 7.NOV.2022 23:20:03


Date: 7.NOV.2022 23:26:24




FR1 n2 / 10MHz / DFT-s-OFDM / QPSK

Lowest Band Edge / 1RB0

Highest Band Edge / 1RBmax

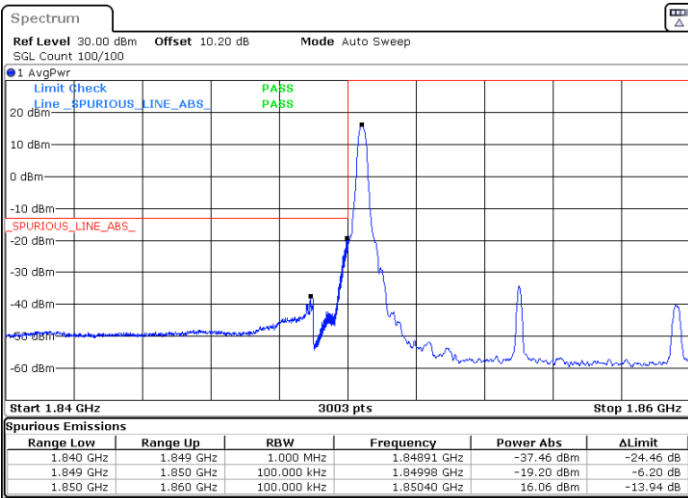


Date: 7.NOV.2022 23:20:49

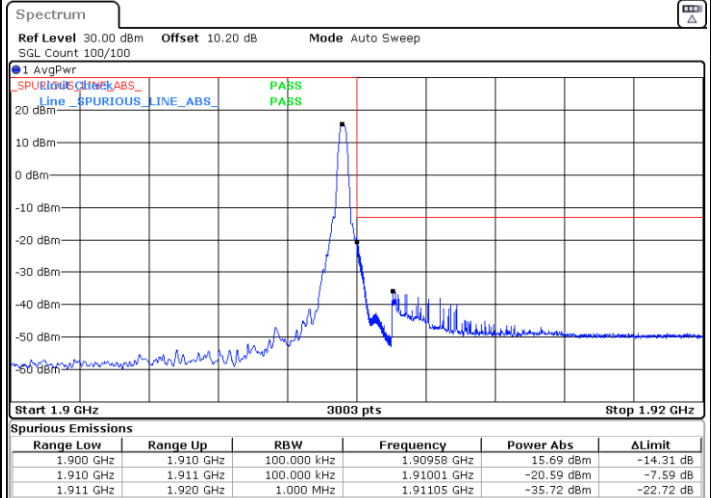


Date: 7.NOV.2022 23:28:43

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

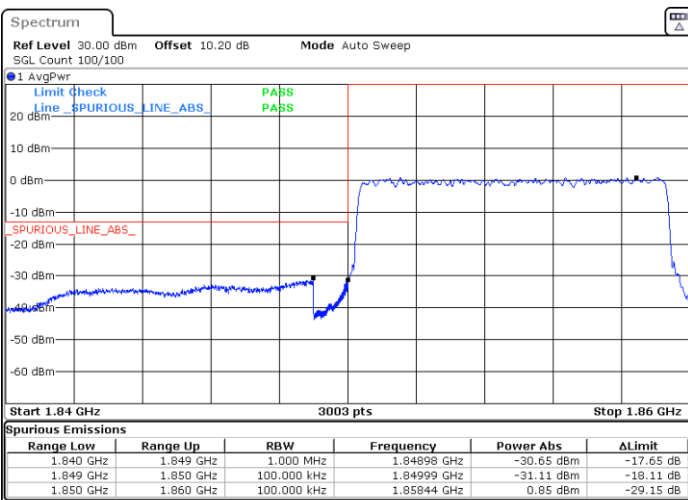

Date: 7.NOV.2022 23:20:25

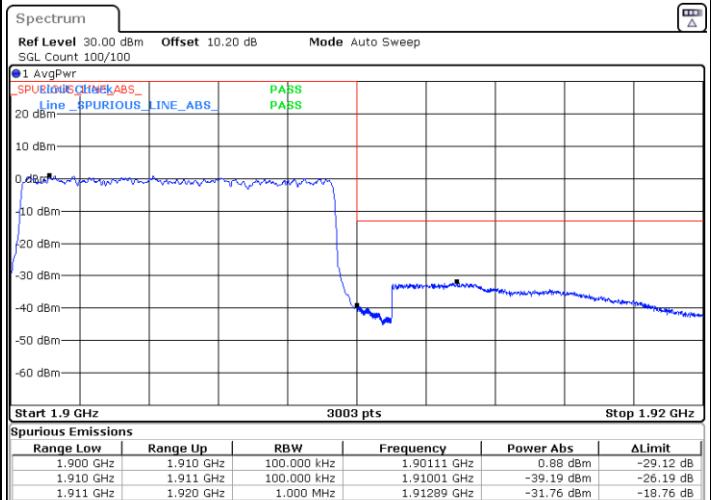


Date: 7.NOV.2022 23:26:35




FR1 n2 / 20MHz / DFT-s-OFDM / PI/2 BPSK

Lowest Band Edge / 1RB0

Highest Band Edge / 1RBmax

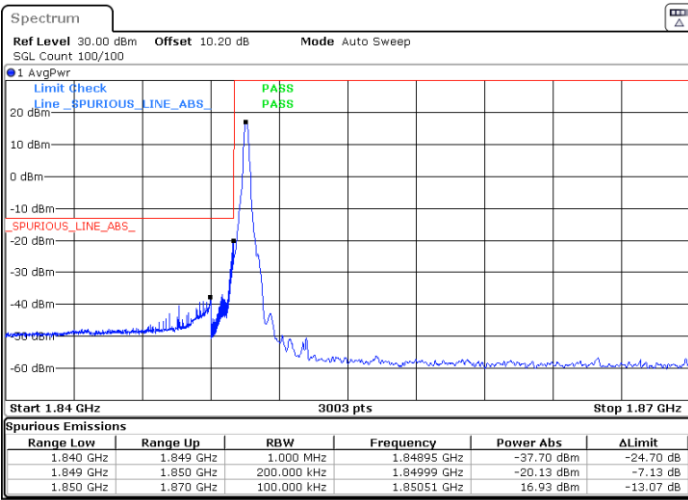


Date: 8.NOV.2022 01:02:12

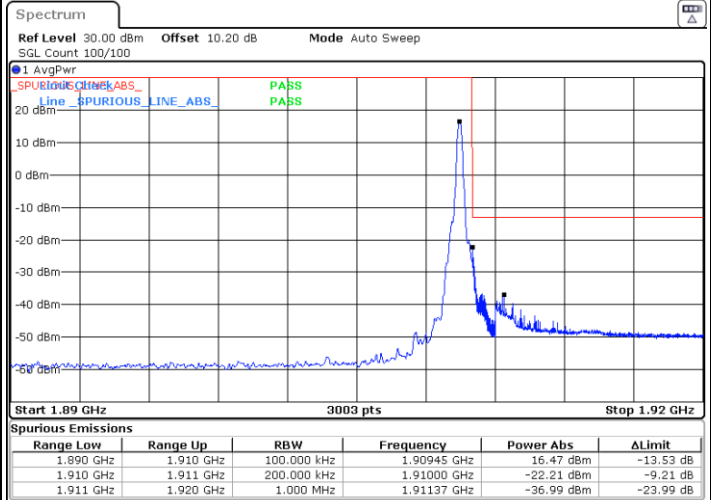


Date: 8.NOV.2022 01:04:59

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

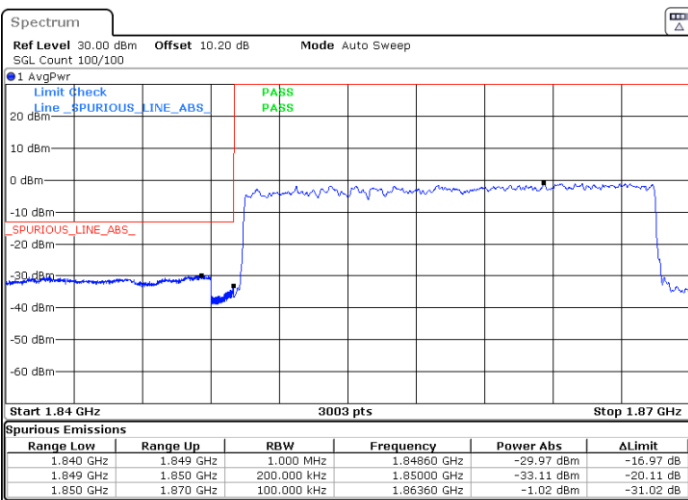

Date: 8.NOV.2022 01:01:16

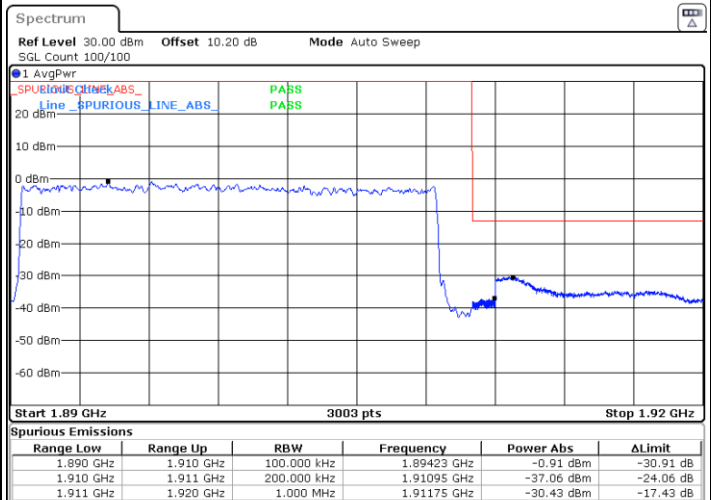


Date: 8.NOV.2022 01:03:46




FR1 n2 / 20MHz / DFT-s-OFDM / QPSK

Lowest Band Edge / 1RB0

Highest Band Edge / 1RBmax

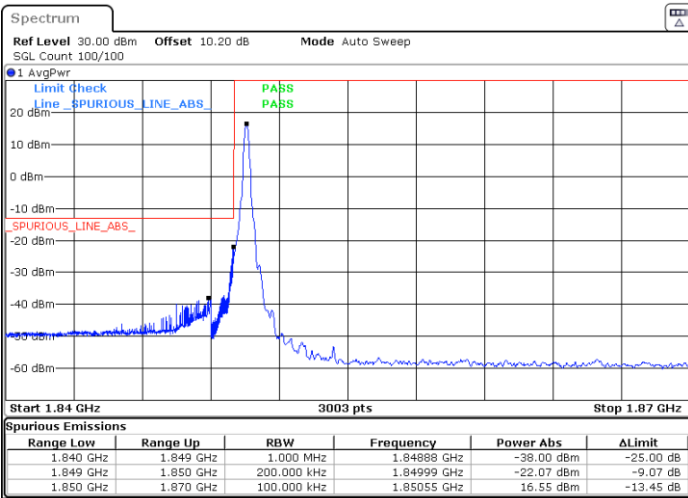


Date: 8.NOV.2022 01:01:53

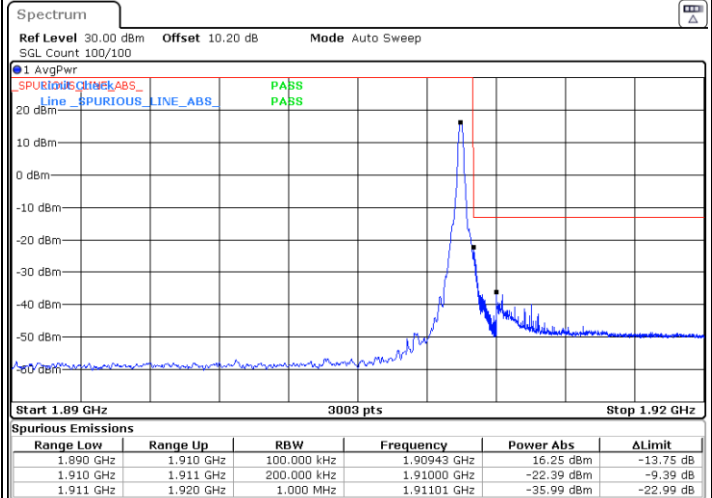


Date: 8.NOV.2022 01:04:42

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

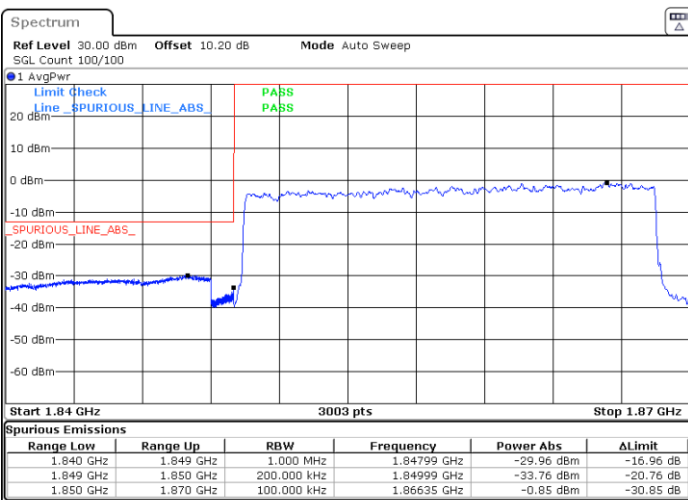

Date: 8.NOV.2022 01:01:33

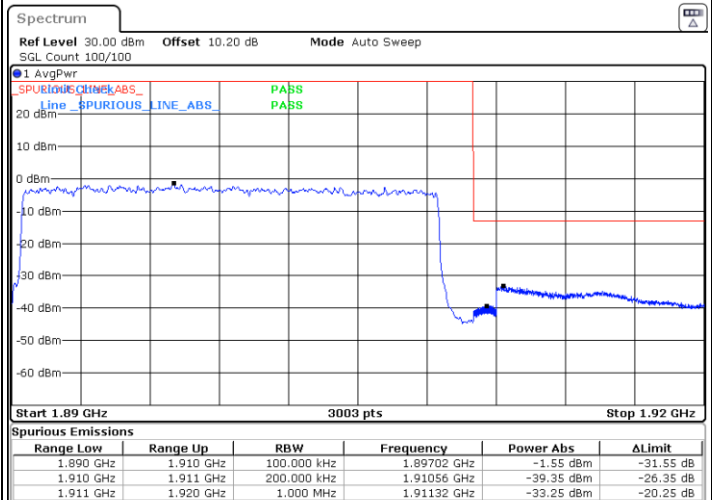

Date: 8.NOV.2022 01:04:01





Conducted Spurious Emission

FR1 n2 / 5MHz / DFT-S OFDM / BPSK

Lowest Channel / 1RB1


Middle Channel / 1RB1

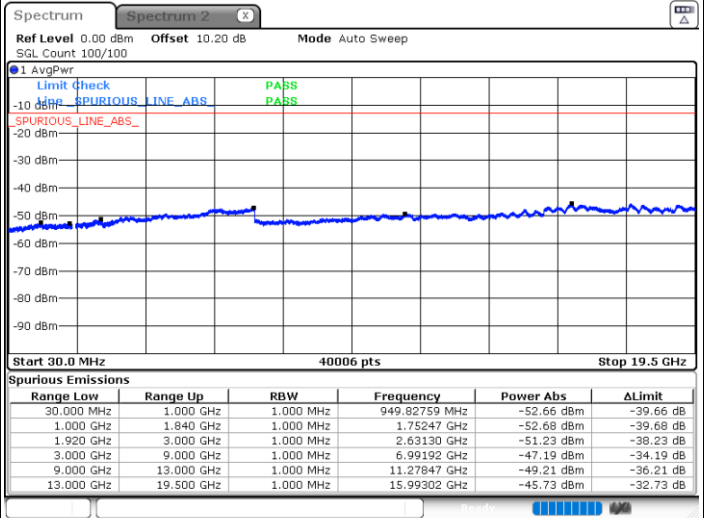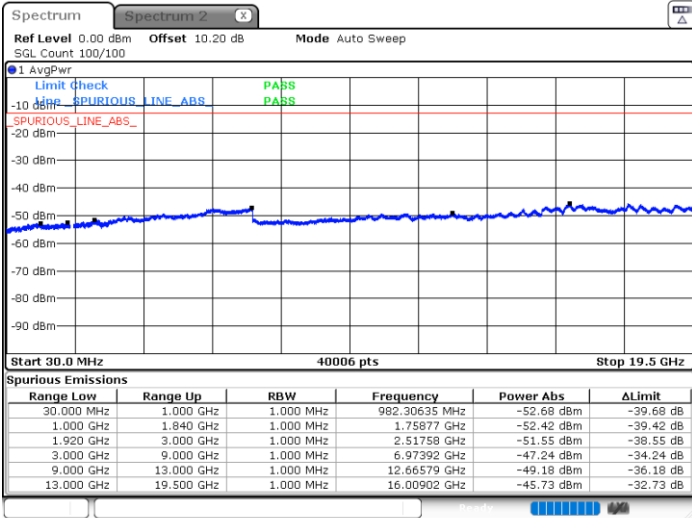

Date: 8.NOV.2022 08:48:51

Date: 8.NOV.2022 08:54:41

Highest Channel / 1RB1

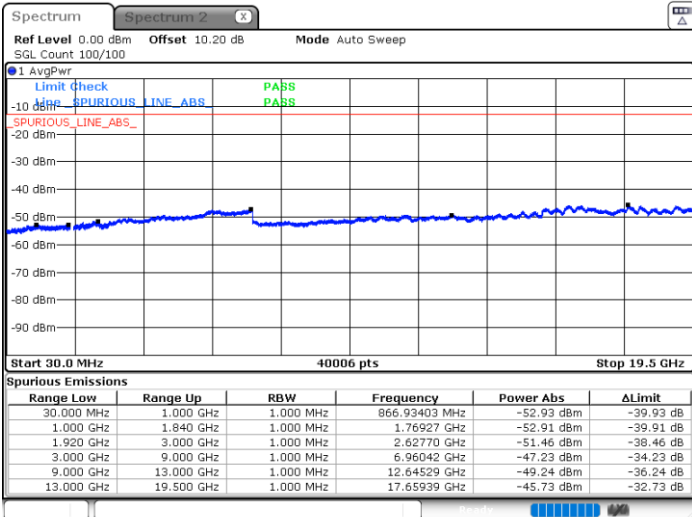


Date: 8.NOV.2022 08:55:23




FR1 n2 / 5MHz / DFT-S OFDM / QPSK

Lowest Channel / 1RB1

Middle Channel / 1RB1

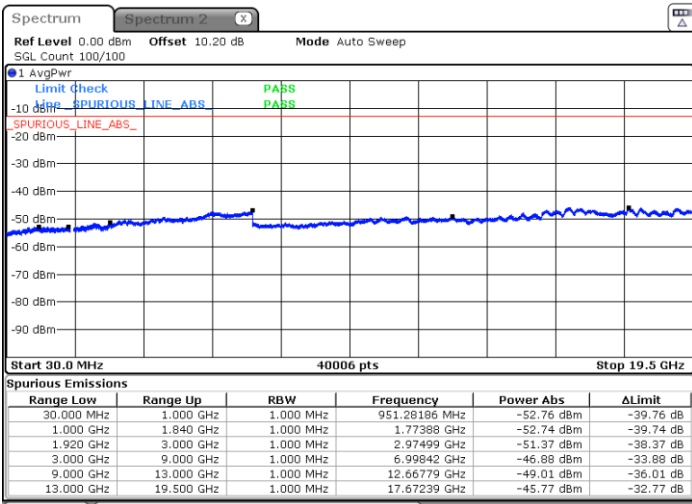


Date: 8.NOV.2022 08:49:37

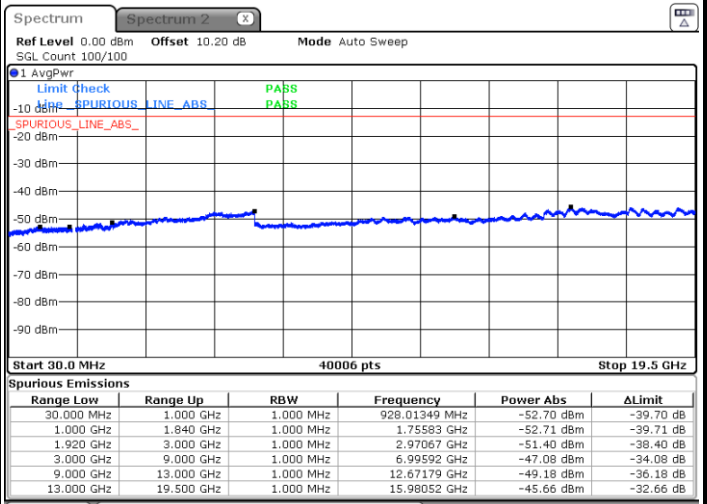

Date: 8.NOV.2022 08:53:01

Highest Channel / 1RB1

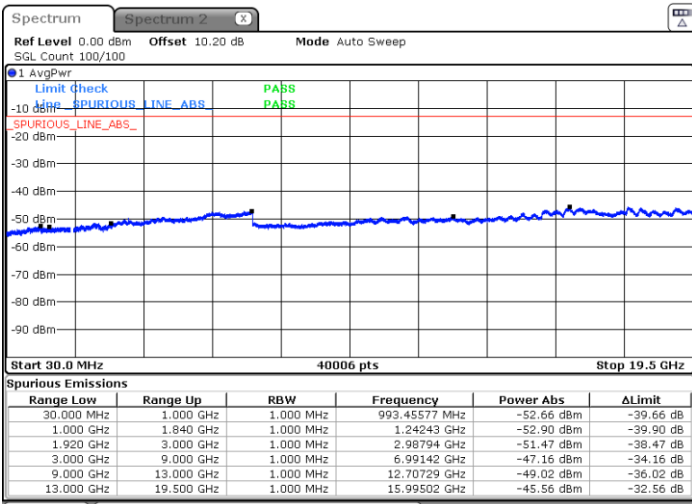


Date: 8.NOV.2022 08:56:07




FR1 n2 / 10MHz / DFT-S OFDM / BPSK

Lowest Channel / 1RB1

Middle Channel / 1RB1

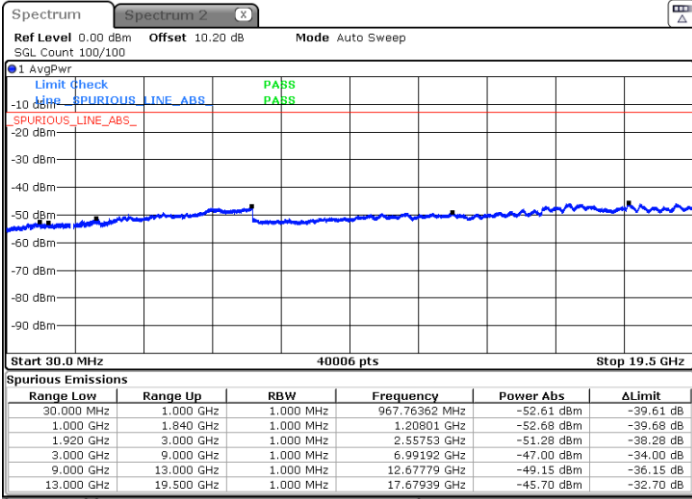


Date: 8.NOV.2022 08:59:57

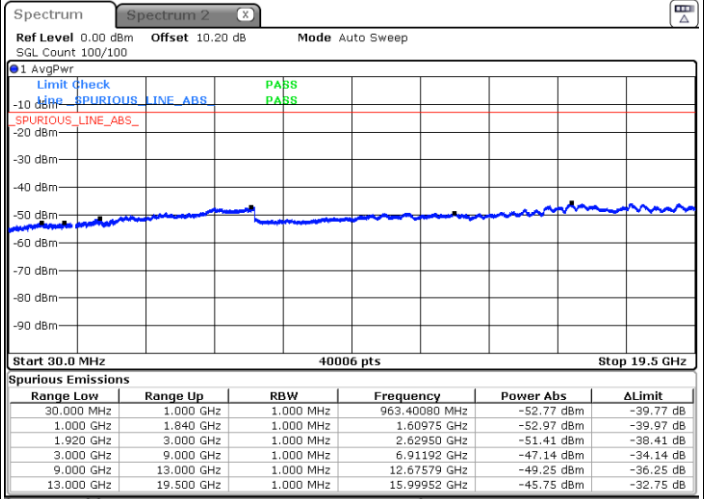

Date: 8.NOV.2022 09:01:01

Highest Channel / 1RB1

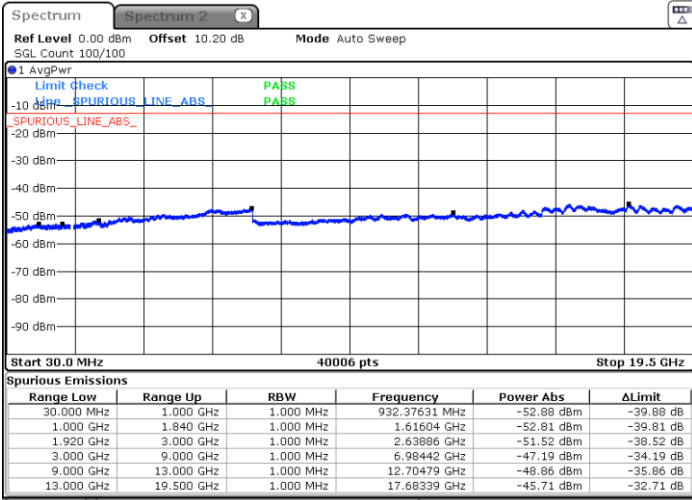


Date: 8.NOV.2022 09:04:32




FR1 n2 / 10MHz / DFT-S OFDM / QPSK

Lowest Channel / 1RB1

Middle Channel / 1RB1

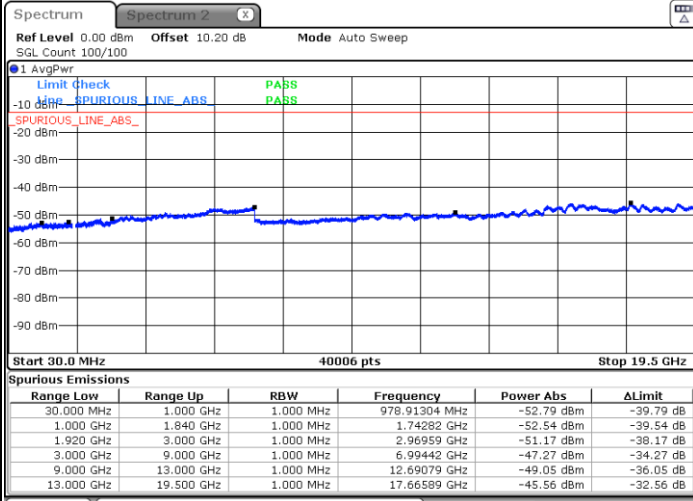


Date: 8.NOV.2022 08:58:36

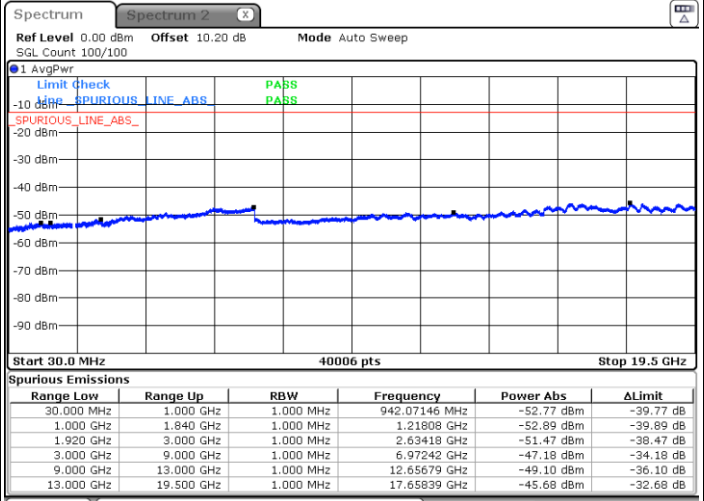

Date: 8.NOV.2022 09:01:47

Highest Channel / 1RB1

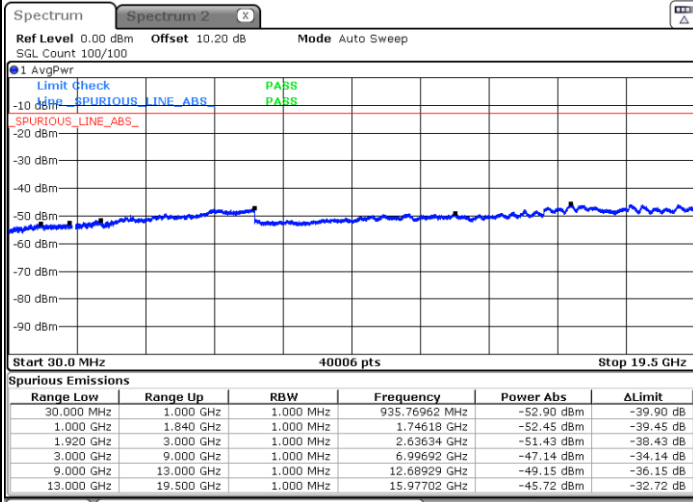


Date: 8.NOV.2022 09:03:44




FR1 n2 / 20MHz / DFT-S OFDM / BPSK

Lowest Channel / 1RB1

Middle Channel / 1RB1

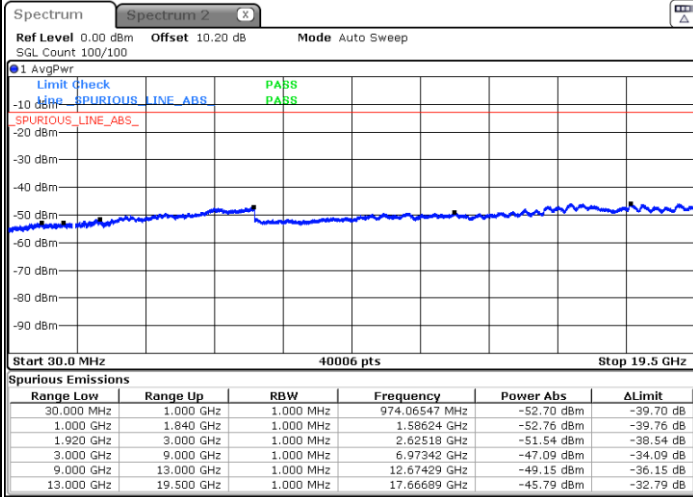


Date: 8.NOV.2022 09:05:29

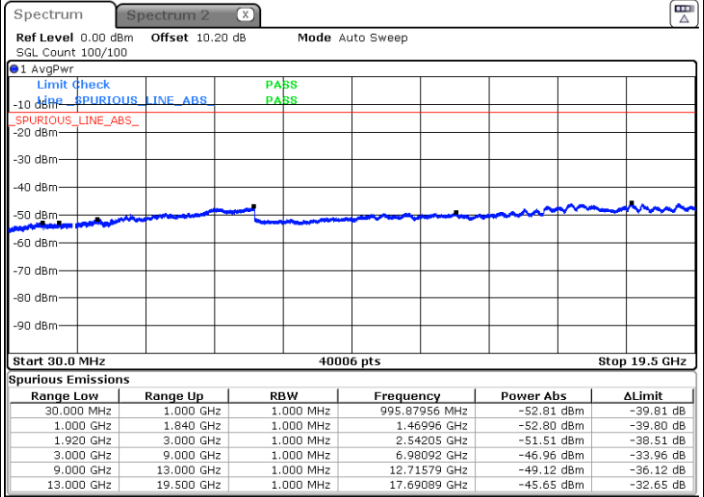

Date: 8.NOV.2022 09:08:38

Highest Channel / 1RB1

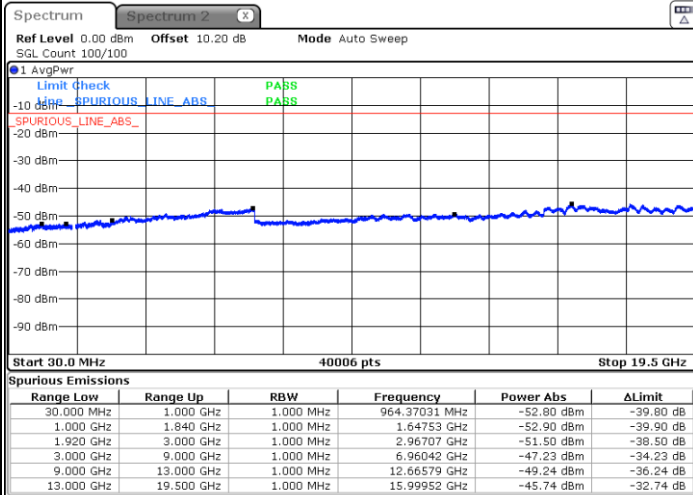


Date: 8.NOV.2022 09:09:25




FR1 n2 / 20MHz / DFT-S OFDM / QPSK

Lowest Channel / 1RB1

Middle Channel / 1RB1

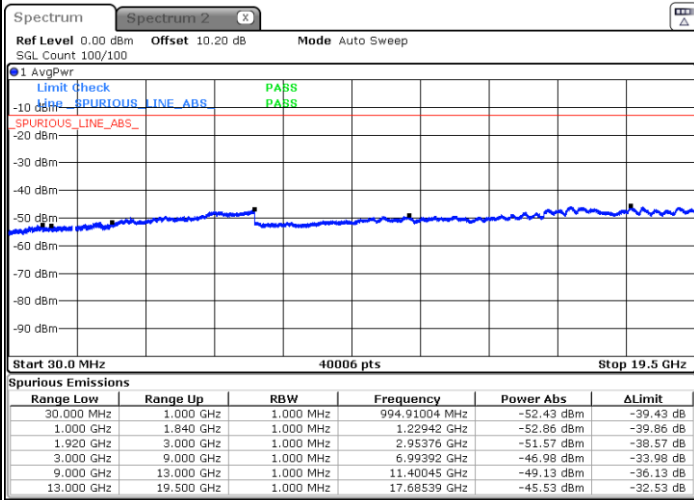


Date: 8.NOV.2022 09:06:13

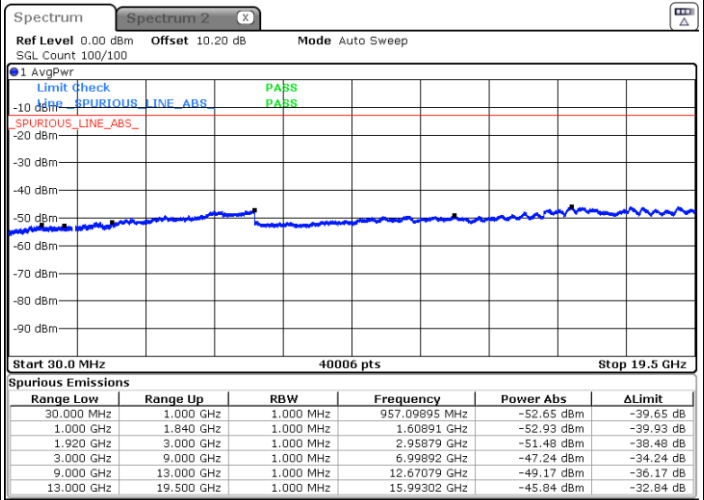

Date: 8.NOV.2022 09:07:06

Highest Channel / 1RB1

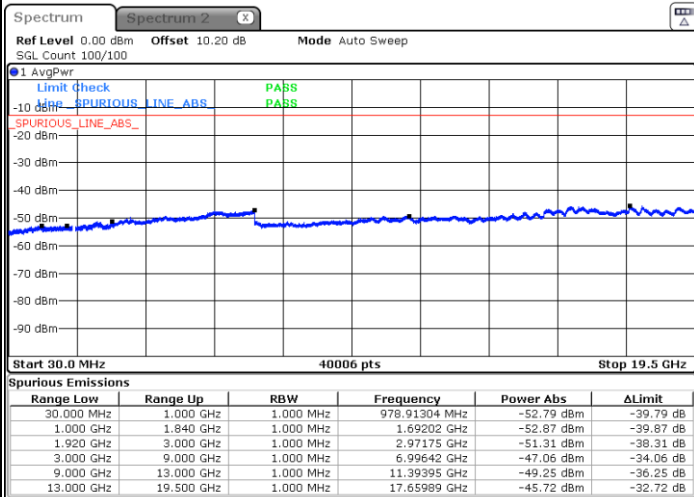

Date: 8.NOV.2022 09:10:44



Frequency Stability

Test Conditions		FR1 n2 (QPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 20MHz	Note 2.
		Deviation (ppm)	Result
20	Normal Voltage	0.0021	PASS
40	Normal Voltage	0.0025	
30	Normal Voltage	0.0019	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0013	
0	Normal Voltage	0.0021	
-10	Normal Voltage	0.0036	
-20	Normal Voltage	0.0027	
-30	Normal Voltage	0.0015	
20	Maximum Voltage	0.0019	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0026	

Note:


1. Normal Voltage =3.89V. ; Battery End Point (BEP) =3. 4V. ; Maximum Voltage =4.48 V.
2. Note: The frequency fundamental emissions stay within the authorized frequency block.



FR1 n5

Peak-to-Average Ratio

Mode	FR1 n5 / 20MHz / DFT-S OFDM				
Mod.	PI/2 BPSK	QPSK			Limit: 13dB
RB Size	Full RB	Full RB			Result
Middle CH	3.83	5.01			PASS

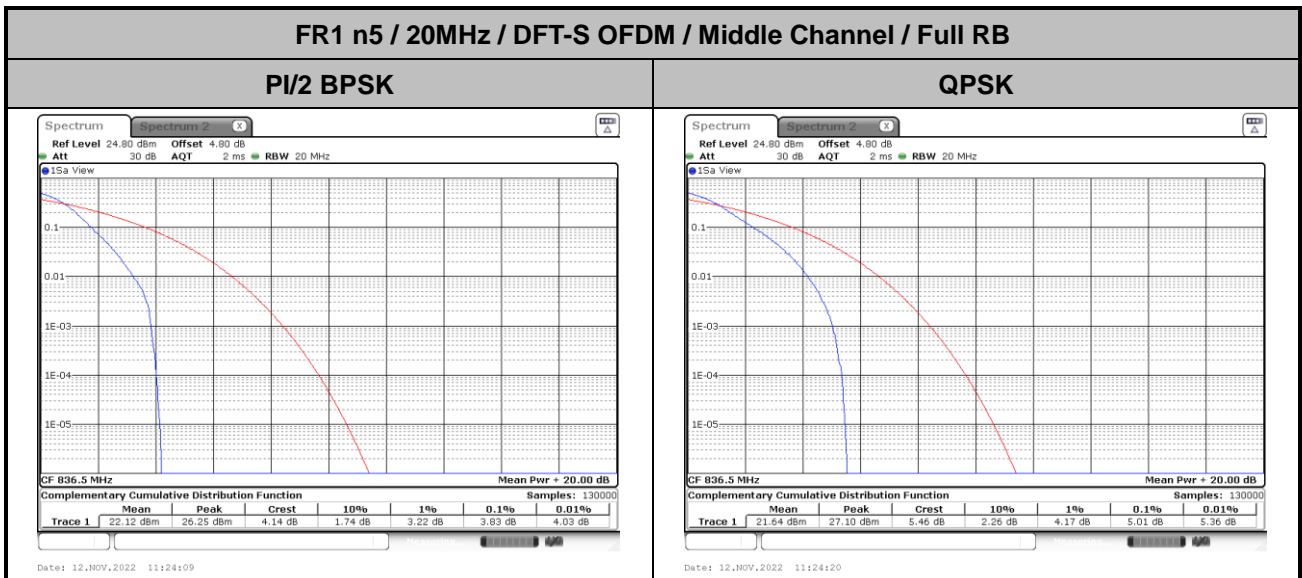




26dB Bandwidth

Mode	FR1 n5 : 26dBW (MHz) / CP OFDM			
BW	5MHz	10MHz	15MHz	20MHz
Mod.	QPSK	QPSK	QPSK	QPSK
Middle CH	5.00	10.13	14.93	19.94
BW	5MHz	10MHz	15MHz	20MHz
Mod.	16QAM	16QAM	16QAM	16QAM
Middle CH	5.30	10.39	15.26	20.02
BW	5MHz	10MHz	15MHz	20MHz
Mod.	64QAM	64QAM	64QAM	64QAM
Middle CH	4.97	10.37	15.08	19.98
BW	5MHz	10MHz	15MHz	20MHz
Mod.	256QAM	256QAM	256QAM	256QAM
Middle CH	5.15	10.35	15.11	20.22




FR1 n5 / 5MHz / CP OFDM / Middle Channel / Full RB

QPSK

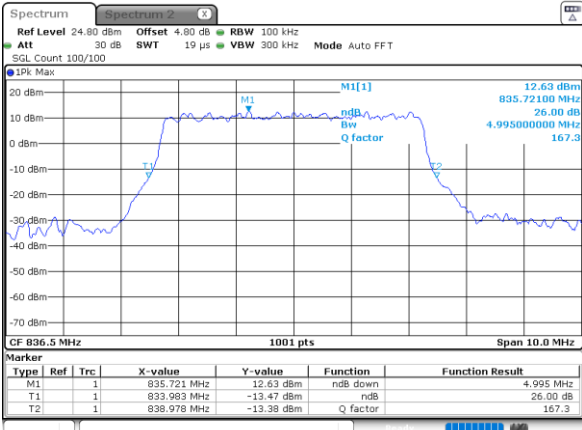


Date: 12.NOV.2022 12:33:42

16QAM

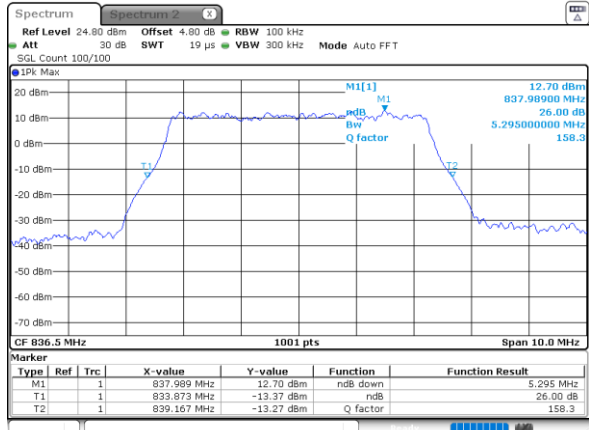


Date: 12.NOV.2022 12:33:59

64QAM

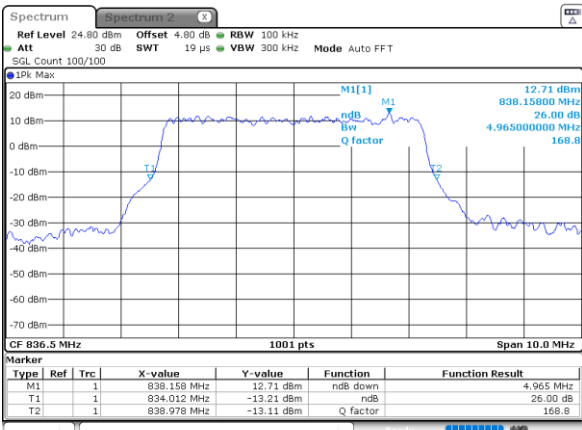

Date: 12.NOV.2022 12:34:19

256QAM

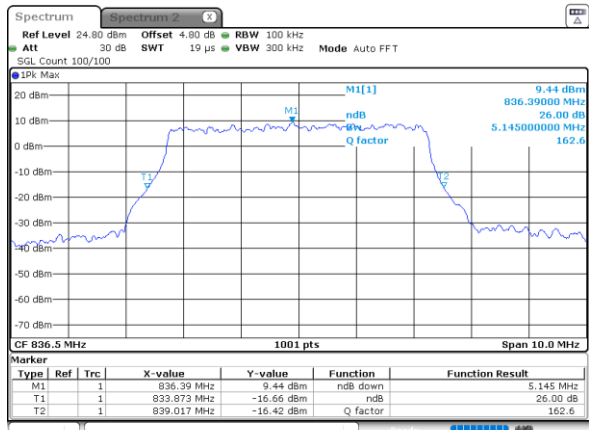


Date: 12.NOV.2022 12:35:02




FR1 n5 / 10MHz / CP OFDM / Middle Channel / Full RB

QPSK

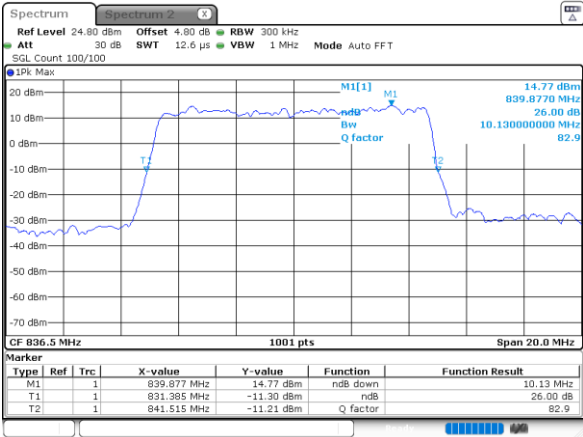


Date: 12.NOV.2022 11:40:53

16QAM

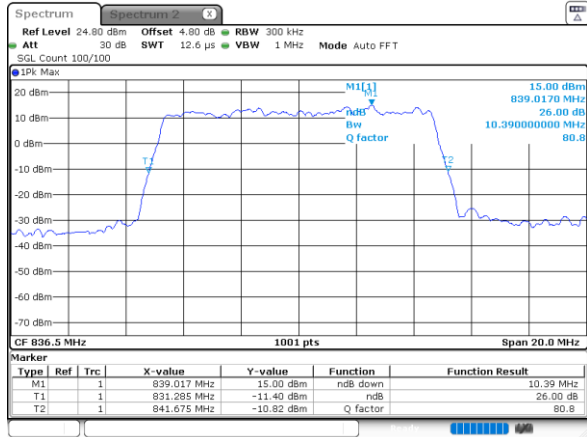


Date: 12.NOV.2022 11:40:33

64QAM

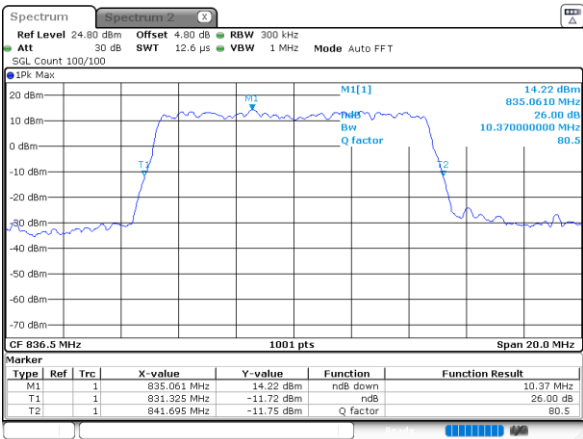

Date: 12.NOV.2022 11:40:16

256QAM

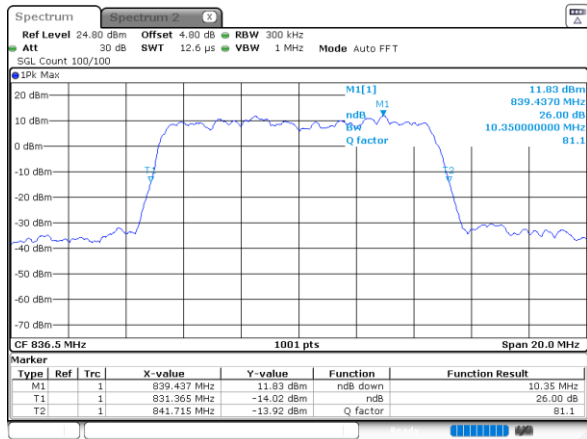

Date: 12.NOV.2022 11:39:59