

FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2335-1
FCC ID : IHDT56AJ6
STANDARD : 47 CFR Part 2, Part 27 Subpart Q
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S) : Oct. 12, 2022 ~ Nov. 16, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (Shenzhen).

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY..... 3
SUMMARY OF TEST RESULT 4
1 GENERAL DESCRIPTION 5
1.1 Applicant 5
1.2 Manufacturer 5
1.3 Product Feature of Equipment Under Test 5
1.4 Product Specification of Equipment Under Test 5
1.5 Specification of Accessory 6
1.6 Modification of EUT 6
1.7 Maximum EIRP Power and Emission Designator 7
1.8 Testing Site 7
1.9 Test Software 8
1.10 Applied Standards 8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 9
2.1 Test Mode 9
2.2 Connection Diagram of Test System 10
2.3 Support Unit used in test configuration and system 10
2.4 Measurement Results Explanation Example 10
2.5 Frequency List of Low/Middle/High Channels 11
3 CONDUCTED TEST ITEMS 12
3.1 Measuring Instruments 12
3.2 Test Setup 12
3.3 Test Result of Conducted Test 12
3.4 Conducted Output Power Measurement 13
3.5 Peak-to-Average Ratio 14
3.6 EIRP 15
3.7 Occupied Bandwidth 16
3.8 Conducted Band Edge Measurement 17
3.9 Conducted Spurious Emission Measurement 18
3.10 Frequency Stability Measurement 19
4 RADIATED TEST ITEMS 20
4.1 Measuring Instruments 20
4.2 Test Setup 20
4.3 Test Result of Radiated Test 21
4.4 Radiated Spurious Emission Measurement 22
5 LIST OF MEASURING EQUIPMENT 23
6 UNCERTAINTY OF EVALUATION 24
APPENDIX A. TEST RESULTS OF CONDUCTED TEST
APPENDIX B. TEST RESULTS OF RADIATED TEST
APPENDIX C. TEST SETUP PHOTOGRAPHS

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	—	Report Only	-
3.5	§27.50 (k)(4)	Peak-to-Average Ratio	<13dB	PASS	
3.6	§27.50 (k)(3)	EIRP	EIRP < 1W (30dBm)	PASS	-
3.7	§2.1049	Occupied Bandwidth	—	Report Only	-
3.8	§2.1051 §27.53 (n)(2)	Conducted Band Edge Measurement	-13dBm/MHz	PASS	-
3.9	§2.1051 §27.53 (n)(2)	Conducted Spurious Emission	-13dBm/MHz	PASS	-
3.10	§2.1055 §27.54	Frequency Stability Temperature & Voltage	Within the band	PASS	-
4.4	§2.1053 §27.53 (n)(2)	Radiated Spurious Emission	-13dBm/MHz	PASS	Under limit 31.31 dB at 10122.000 MHz

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Applicant

Motorola Mobility LLC
 222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
 222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2335-1
FCC ID	IHDT56AJ6
IMEI Code	Conducted: 352691660026675/352691660026683 Radiation: 352691660027434/352691660027442
HW Version	DVT2
SW Version	TTP33.24
EUT Stage	Identical Prototype

1.4 Product Specification of Equipment Under Test

Product Feature	
Tx/Rx Frequency	5G NR n78: 3450 MHz ~ 3550 MHz
Bandwidth	20 / 30 / 40 / 50 / 60 / 70 / 80 / 90 / 100MHz
SCS	30kHz
Antenna Gain	Ant. 2: -4.1 dBi Ant. 3: -4.5 dBi Ant. 5: -2.3 dBi Ant. 7: -4.3 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

Remark:

1. The maximum EIRP is calculated from max output power and max antenna gain, only the maximum EIRP of Ant.5 is shown in the report.
2. The device supports n78(1T4R) SRS resources on Ant.2/3/5/7, only the test data of worst Ant.5 is showed in the report according to the maximum power.
3. 5G NR n78 supports SA and NSA mode. The whole testing has assessed SA mode by referring to the higher conducted power for conducted test items.
4. The EN-DC mode combination could be referred to the product spec.

- For NSA mode of RSE testing, we only choose the combination of the maximum power among all NSA combinations to test.

1.5 Specification of Accessory

Specification of Accessory				
AC Adapter 1(US)	Brand Name	Motorola(AOHAI)	Model Name	MC-101
AC Adapter 1(EU)	Brand Name	Motorola(AOHAI)	Model Name	MC-102
AC Adapter 1(UK)	Brand Name	Motorola(AOHAI)	Model Name	MC-103
AC Adapter 1(AU)	Brand Name	Motorola(AOHAI)	Model Name	MC-105
AC Adapter 2(US)	Brand Name	Motorola(Chenyang)	Model Name	MC-101
AC Adapter 2(EU)	Brand Name	Motorola(Chenyang)	Model Name	MC-102
AC Adapter 2(UK)	Brand Name	Motorola(Chenyang)	Model Name	MC-103
AC Adapter 2(AU)	Brand Name	Motorola(Chenyang)	Model Name	MC-105
AC Adapter 3(US)	Brand Name	Motorola(Salcomp)	Model Name	MC-101
AC Adapter 3(EU)	Brand Name	Motorola(Salcomp)	Model Name	MC-102
AC Adapter 3(UK)	Brand Name	Motorola(Salcomp)	Model Name	MC-103
AC Adapter 3(AU)	Brand Name	Motorola(Salcomp)	Model Name	MC-105
AC Adapter 4(US)	Brand Name	Motorola(Salcomp)	Model Name	MC-201L
AC Adapter 4(EU)	Brand Name	Motorola(Salcomp)	Model Name	MC-202L
AC Adapter 4(AR)	Brand Name	Motorola(Salcomp)	Model Name	MC-206L
AC Adapter 4(BR)	Brand Name	Motorola(Salcomp)	Model Name	MC-207L
AC Adapter 4(CHILE)	Brand Name	Motorola(Salcomp)	Model Name	MC-209L
AC Adapter 5(US)	Brand Name	Motorola(AOHAI)	Model Name	MC-201L
AC Adapter 5(EU)	Brand Name	Motorola(AOHAI)	Model Name	MC-202L
AC Adapter 5(AR)	Brand Name	Motorola(AOHAI)	Model Name	MC-206L
AC Adapter 6(BR)	Brand Name	Motorola(Chenyang)	Model Name	MC-207
Battery 1	Brand Name	Motorola(ATL)	Model Name	NH50
Battery 2	Brand Name	Motorola(SUNWODA)	Model Name	NH50
Earphone 1	Brand Name	Motorola(New Leader)	Model Name	MH202
Earphone 2	Brand Name	Motorola(Lyand)	Model Name	MH202
USB Cable 1	Brand Name	Motorola(kawakami)	Model Name	S928D67706
USB Cable 2	Brand Name	Motorola(Beauford)	Model Name	S928D70140

1.6 Modification of EUT

No modifications are made to the EUT during all test items.

1.7 Maximum EIRP Power and Emission Designator

5G NR n78		PI/2 BPSK / QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
20	3460.02 ~ 3540.00	0.1227	18M2G7D	0.0971	18M3W7D
30	3465.00 ~ 3535.02	0.1230	27M8G7D	0.0971	27M9W7D
40	3470.01 ~ 3530.01	0.1227	38M0G7D	0.0971	38M1W7D
50	3475.02 ~ 3525.00	0.1208	47M5G7D	0.0957	47M7W7D
60	3480.00 ~ 3520.02	0.1211	59M0G7D	0.0971	58M4W7D
70	3485.01 ~ 3515.01	0.1216	67M5G7D	0.0962	68M1W7D
80	3490.02 ~ 3510.00	0.1202	78M2G7D	0.0964	78M3W7D
90	3495.00 ~ 3504.99	0.1227	87M4G7D	0.0986	87M8W7D
100	3500.01 ~ 3500.01	0.1233	97M1G7D	0.1014	97M9W7D

Note: All modulations have been tested, and only the worst test results of PSK & QAM are shown in the report.

1.8 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-KS	CN1257	314309



Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-SZ	CN1256	421272

Test data subcontracted: Radiated Spurious Emission test results in section 4.4 of this report.

1.9 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH04-SZ	AUDIX	E3	6.2009-8-24

1.10 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, Part 27 Subpart Q
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 Power Meas License Digital Systems D01 v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦

Remark:




1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Test Mode


Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.

Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			

Test Items	5G NR	Bandwidth (MHz)										Modulation					RB #		Test Channel		
		20	30	40	50	60	70	80	90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256 QAM	1	Full	L	M	H	
Max. Output Power	n78	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	n78	v										v	v				v	v	v	v	
26dB and 99% Bandwidth	n78	v	v	v	v	v	v	v	v	v		v	v	v	v		v		v		
Conducted Band Edge	n78	v				v				v	v	v				v	v	v		v	
Conducted Spurious Emission	n78	v				v				v	v	v				v		v	v	v	
Frequency Stability	n78	v										v				v		v			
E.I.R.P	n78	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	
Radiated Spurious Emission	n78	Worst Case																	v		
Note	1. The mark "v " means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. Frequency Stability : Normal Voltage = 3.87V ; Low Voltage =3.60V. ; High Voltage =4.45V																				

2.2 Connection Diagram of Test System

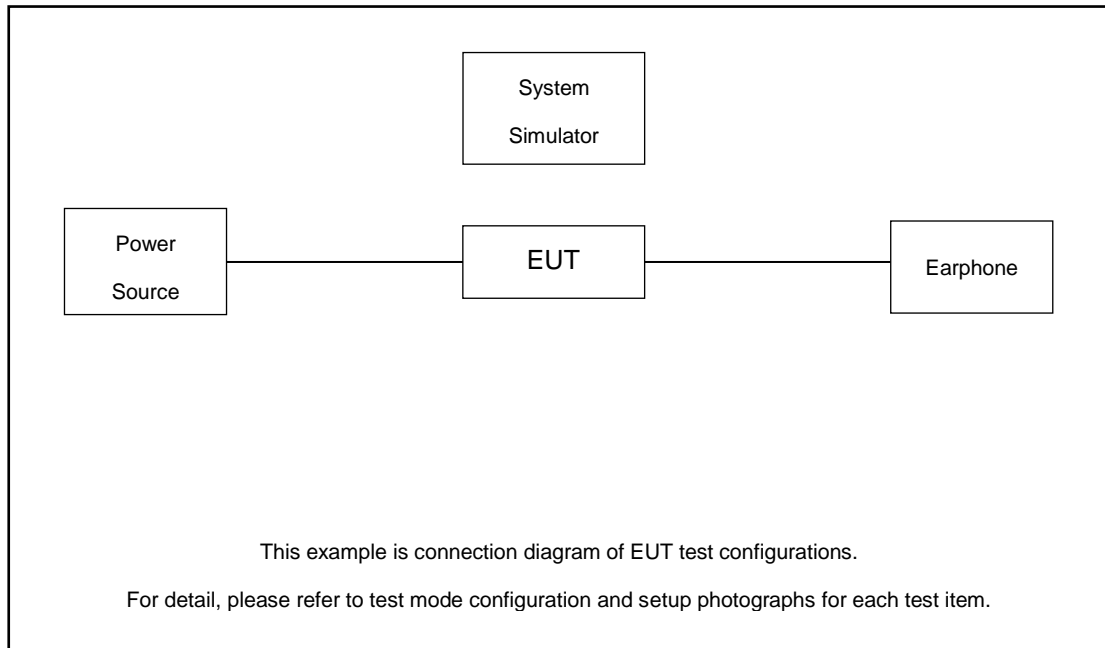

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 6.5 dB.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 6.5 \text{ (dB)} \end{aligned}$$

2.5 Frequency List of Low/Middle/High Channels

5G n78 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	-	633334	-
	Frequency	-	3500.01	-
90	Channel	633000	633334	633666
	Frequency	3495	3500.01	3504.99
80	Channel	632668	633334	634000
	Frequency	3490.02	3500.01	3510
70	Channel	632334	633334	634332
	Frequency	3485.01	3500.01	3514.98
60	Channel	632000	633334	634666
	Frequency	3480	3500.01	3519.99
50	Channel	631668	633334	635000
	Frequency	3475.02	3500.01	3525
40	Channel	631334	633334	635332
	Frequency	3470.01	3500.01	3529.98
30	Channel	631000	633334	635666
	Frequency	3465	3500.01	3534.99
20	Channel	630668	633334	636000
	Frequency	3460.02	3500.01	3540


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

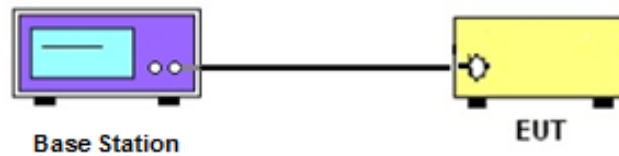

3.2.2 Peak-to-Average Ratio, Occupied / 26dB Bandwidth, Band-Edge and Conducted Spurious Emission

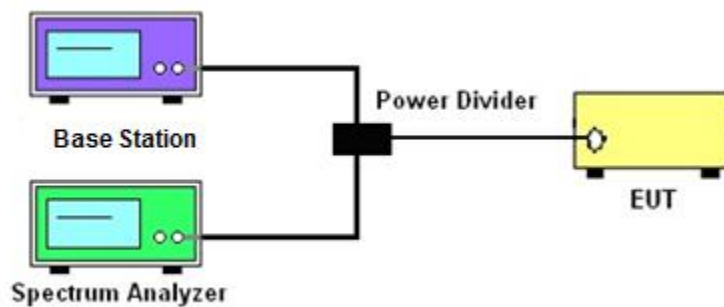

3.2.3 Frequency Stability

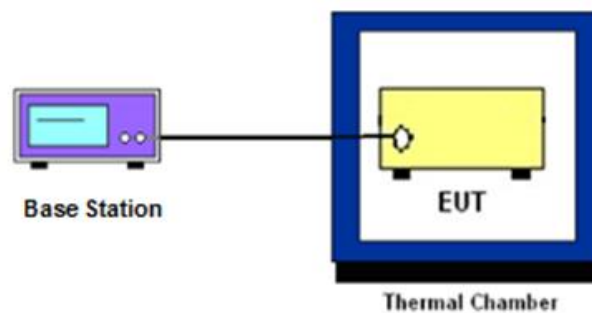

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power Measurement

3.4.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.6 (PAPR).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set EUT in maximum power output.
4. Set the RBW = 1MHz, VBW = 3MHz, Detector = Peak, Trace mode = max hold, Set span $\geq 2 \times$ OBW in spectrum analyzer.
5. Set the RBW = 1MHz, VBW = 3MHz, Detector = power averaging, Trace mode = max hold, Set span $\geq 2 \times$ OBW in spectrum analyzer.
6. Add $[10 \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission.
7. $\text{PAPR (dB)} = P_{\text{Pk}} \text{ (dBm)} - P_{\text{Avg}} \text{ (dBm)}$

where

PAPR peak-to-average power ratio, in dB

P_{Pk} measured peak power level, in dBm

P_{Avg} measured average power level, in dBm

8. Record the deviation as Peak to Average Ratio.

3.6 EIRP

3.6.1 Description of EIRP Limit

§ 27.50 (k)(3)

Mobile devices are limited to 1Watt (30 dBm) EIRP. Mobile devices operating in these bands must employ a means for limiting power to the minimum necessary for successful communications

3.6.2 Test Procedures

1. According to KDB 412172 D01 Power Approach,
2. $EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where
 P_T = transmitter output power in dBm
 G_T = gain of the transmitting antenna in dBi
 L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.7 Occupied Bandwidth

3.7.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.8 Conducted Band Edge Measurement

3.8.1 Description of Conducted Band Edge Measurement

§ 27.53 (n)(2)

For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.

Compliance with this paragraph is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed, but limited to a maximum of 200 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW \geq 1% EBW but limited to a maximum of 200 kHz in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz and 5 MHz removed from the band edge, set RBW \geq 500KHz.
6. Beyond the 5 MHz removed from the band edge, set RBW = 1MHz.
7. Set spectrum analyzer with RMS detector.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. Checked that all the results comply with the emission limit line.

3.9 Conducted Spurious Emission Measurement

3.9.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges shall not exceed -13 dBm/MHz.

It is measured by means of a calibrated spectrum analyzer and scanned from 30MHz up to a frequency including its 10th harmonic.

3.9.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. Checked that all the results comply with the emission limit line.

3.10 Frequency Stability Measurement

3.10.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

3.10.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.10.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5.
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.

4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test below 30MHz



4.2.2 For radiated test from 30MHz to 1GHz

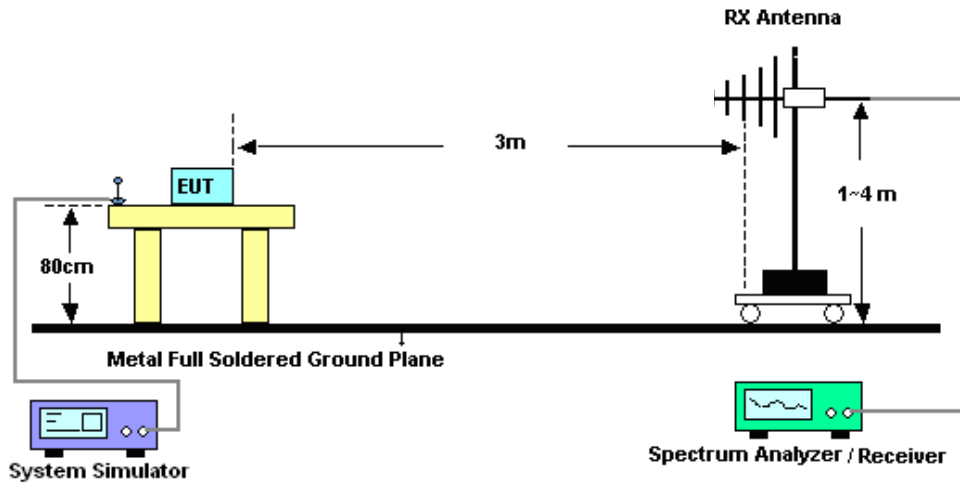

4.2.3 For radiated test above 1GHz



4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Radiated Spurious Emission Measurement

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI/TIA-603-E. The power of any emission outside of the authorized operating frequency ranges shall not exceed -13 dBm/MHz.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
$$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$
$$\text{ERP (dBm)} = \text{EIRP} - 2.15$$
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022	Oct. 20, 2022~ Nov. 16, 2022	Oct. 11, 2023	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	Aug. 25, 2022	Oct. 20, 2022~ Nov. 16, 2022	Aug. 24, 2023	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 15, 2022	Oct. 20, 2022~ Nov. 16, 2022	Jul. 14, 2023	Conducted (TH01-KS)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 07, 2022	Oct. 12, 2022	Jul. 06, 2023	Radiation (03CH04-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jun. 28, 2022	Oct. 12, 2022	Jun. 27, 2023	Radiation (03CH04-SZ)
Bilog Antenna	TeseQ	CBL6111D	41909	30MHz~1GHz	Oct. 22, 2021	Oct. 12, 2022	Oct. 21, 2022	Radiation (03CH04-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1474	1GHz~18GHz	Jul. 07, 2022	Oct. 12, 2022	Jul. 06, 2023	Radiation (03CH04-SZ)
Horn Antenna	SCHWARZBECK	BBHA9170	9170#679	15GHz~40GHz	Jul. 07, 2022	Oct. 12, 2022	Jul. 06, 2023	Radiation (03CH04-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz ~3000MHz	Oct. 22, 2021	Oct. 12, 2022	Oct. 21, 2022	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P-R	1943528	1GHz~18GHz	Oct. 22, 2021	Oct. 12, 2022	Oct. 21, 2022	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	TTA1840-35 -HG	1871923	18GHz~40GHz	Oct. 22, 2021	Oct. 12, 2022	Oct. 21, 2022	Radiation (03CH04-SZ)
Amplifier	Agilent Technologies	83017A	MY53270156	500MHz~26.5GHz	Oct. 22, 2021	Oct. 12, 2022	Oct. 21, 2022	Radiation (03CH04-SZ)
AC Power Source	Chroma	61601	N/A	N/A	NCR	Oct. 12, 2022	NCR	Radiation (03CH04-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Oct. 12, 2022	NCR	Radiation (03CH04-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Oct. 12, 2022	NCR	Radiation (03CH04-SZ)

NCR: No Calibration Required

6 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±0.46 dB
Conducted Emissions	±0.48 dB
Occupied Channel Bandwidth	±0.1 %

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8dB
---	-------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.1dB
---	-------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.9dB
---	-------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Simle Wang	Temperature :	22~23°C
		Relative Humidity :	40~42%

Conducted Output Power(Average power) and EIRP

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Gain	EIRP		
								L	M	H
Channel					633334					
Frequency (MHz)					3500.01				M	
100	PI/2 BPSK	1	1		23.21		-2.30		0.1233	
100	PI/2 BPSK	1	137		22.75		-2.30		0.1109	
100	PI/2 BPSK	1	271		22.83		-2.30		0.1130	
100	PI/2 BPSK	135	0		22.54		-2.30		0.1057	
100	PI/2 BPSK	135	67		22.82		-2.30		0.1127	
100	PI/2 BPSK	135	138		22.42		-2.30		0.1028	
100	PI/2 BPSK	270	0		22.35		-2.30		0.1012	
100	QPSK	1	1		23.11		-2.30		0.1205	
100	QPSK	1	137		22.64		-2.30		0.1081	
100	QPSK	1	271		22.76		-2.30		0.1112	
100	QPSK	135	0		21.97		-2.30		0.0927	
100	QPSK	135	67		22.84		-2.30		0.1132	
100	QPSK	135	138		21.80		-2.30		0.0891	
100	QPSK	270	0		21.93		-2.30		0.0918	
100	16QAM	1	1		22.36		-2.30		0.1014	
100	64QAM	1	1		20.33		-2.30		0.0635	
100	256QAM	1	1		18.53		-2.30		0.0420	
Channel				633000	633334	633666	Gain	L	M	H
Frequency (MHz)				3495	3500.01	3504.99				
90	PI/2 BPSK	1	1	23.17	23.19	22.95	-2.30	0.1222	0.1227	0.1161
90	QPSK	1	1	23.05	23.11	22.91	-2.30	0.1189	0.1205	0.1151
90	16QAM	1	1	22.14	22.18	22.24	-2.30	0.0964	0.0973	0.0986
Channel				632668	633334	634000	Gain	L	M	H
Frequency (MHz)				3490.02	3500.01	3510				
80	PI/2 BPSK	1	1	23.05	23.10	23.08	-2.30	0.1189	0.1202	0.1197
80	QPSK	1	1	23.01	23.08	22.96	-2.30	0.1178	0.1197	0.1164
80	16QAM	1	1	22.14	22.13	22.14	-2.30	0.0964	0.0962	0.0964
Channel				632334	633334	634332	Gain	L	M	H
Frequency (MHz)				3485.01	3500.01	3514.98				
70	QPSK	1	1	23.14	23.15	22.88	-2.30	0.1213	0.1216	0.1143
70	QPSK	1	1	23.05	23.11	22.96	-2.30	0.1189	0.1205	0.1164
70	16QAM	1	1	22.09	22.07	22.13	-2.30	0.0953	0.0948	0.0962




Channel				632000	633334	634666	Gain	L	M	H
Frequency (MHz)				3480	3500.01	3519.99				
60	PI/2 BPSK	1	1	23.13	23.11	22.96	-2.30	0.1211	0.1205	0.1164
60	QPSK	1	1	23.05	23.01	23.01	-2.30	0.1189	0.1178	0.1178
60	16QAM	1	1	22.01	22.17	22.16	-2.30	0.0935	0.0971	0.0968
Channel				631668	633334	635000	Gain	L	M	H
Frequency (MHz)				3475.02	3500.01	3525				
50	PI/2 BPSK	1	1	23.12	23.03	22.85	-2.30	0.1208	0.1183	0.1135
50	QPSK	1	1	23.03	22.96	22.94	-2.30	0.1183	0.1164	0.1159
50	16QAM	1	1	21.96	22.04	22.11	-2.30	0.0925	0.0942	0.0957
Channel				631334	633334	635332	Gain	L	M	H
Frequency (MHz)				3470.01	3500.01	3529.98				
40	PI/2 BPSK	1	1	23.19	23.09	23.15	-2.30	0.1227	0.1199	0.1216
40	QPSK	1	1	23.05	23.01	23.14	-2.30	0.1189	0.1178	0.1213
40	16QAM	1	1	22.17	22.13	22.10	-2.30	0.0971	0.0962	0.0955
Channel				631000	633334	635666	Gain	L	M	H
Frequency (MHz)				3465	3500.01	3534.99				
30	PI/2 BPSK	1	1	23.20	22.98	22.85	-2.30	0.1230	0.1169	0.1135
30	QPSK	1	1	23.16	23.07	23.03	-2.30	0.1219	0.1194	0.1183
30	16QAM	1	1	22.08	22.17	22.15	-2.30	0.0951	0.0971	0.0966
Channel				630668	633334	636000	Gain	L	M	H
Frequency (MHz)				3460.02	3500.01	3540				
20	PI/2 BPSK	1	1	23.19	22.85	23.06	-2.30	0.1227	0.1135	0.1191
20	QPSK	1	1	23.07	22.93	23.01	-2.30	0.1194	0.1156	0.1178
20	16QAM	1	1	21.96	22.05	22.17	-2.30	0.0925	0.0944	0.0971



Peak-to-Average Ratio

Mode	FR1 n78 / 20MHz / DFT-S OFDM				
Mod.	20M				Limit: 13dB
RB Size	BPSK	QPSK			Result
Middle CH	5.35	5.39			PASS

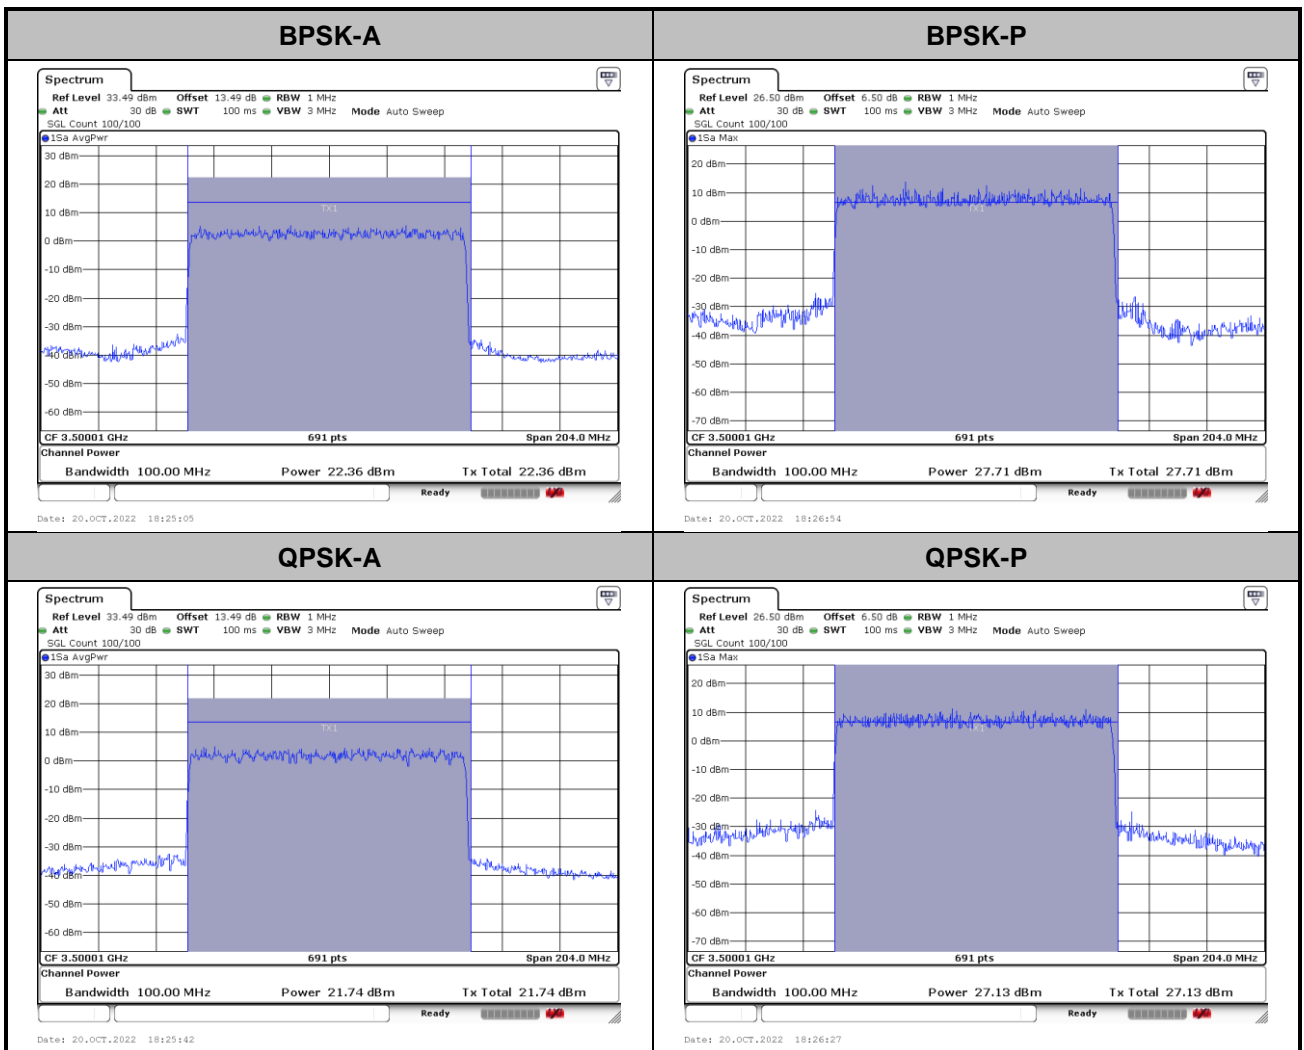


26dB Bandwidth

Mode	FR1 n78 : 26dB BW(20 MHz) / CP OFDM			
Mod.	QPSK	16QAM	64QAM	256QAM
Middle CH	19.22	19.74	19.42	19.22
Mode	FR1 n78 : 26dB BW(30 MHz) / CP OFDM			
Mod.	QPSK	16QAM	64QAM	256QAM
Middle CH	28.81	28.69	28.81	28.81
Mode	FR1 n78 : 26dB BW(40 MHz) / CP OFDM			
Mod.	QPSK	16QAM	64QAM	256QAM
Middle CH	40.28	40.44	40.12	40.04
Mode	FR1 n78 : 26dB BW(50 MHz) / CP OFDM			
Mod.	QPSK	16QAM	64QAM	256QAM
Middle CH	49.85	49.65	49.55	49.55
Mode	FR1 n78 : 26dB BW(60 MHz) / CP OFDM			
Mod.	QPSK	16QAM	64QAM	256QAM
Middle CH	62.34	62.34	62.58	62.46
Mode	FR1 n78 : 26dB BW(70 MHz) / CP OFDM			
Mod.	QPSK	16QAM	64QAM	256QAM
Middle CH	72.25	72.25	71.93	71.77
Mode	FR1 n78 : 26dB BW(80 MHz) / CP OFDM			
Mod.	QPSK	16QAM	64QAM	256QAM
Middle CH	82.48	82.16	82.32	82.16
Mode	FR1 n78 : 26dB BW(90 MHz) / CP OFDM			
Mod.	QPSK	16QAM	64QAM	256QAM
Middle CH	92.25	92.25	92.25	92.07
Mode	FR1 n78 : 26dB BW(100 MHz) / CP OFDM			
Mod.	QPSK	16QAM	64QAM	256QAM
Middle CH	102.5	102.7	102.3	102.3




20MHz CP

QPSK

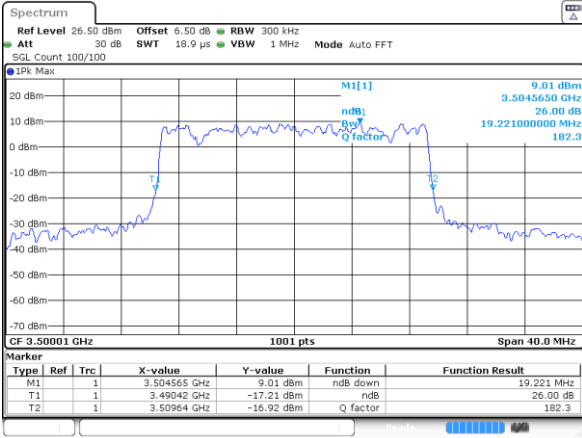


Date: 16 NOV 2022 18:10:46

16QAM

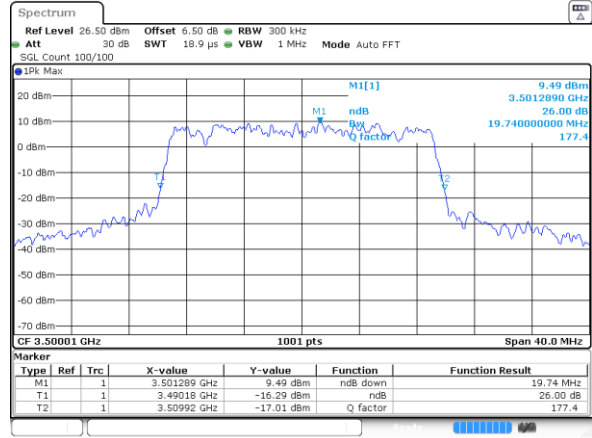


Date: 16 NOV 2022 18:11:53

64QAM

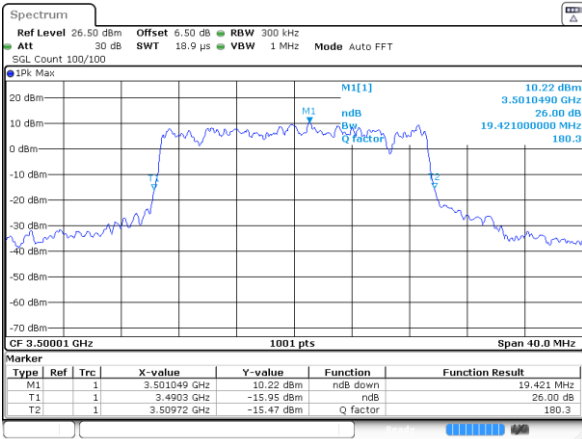

Date: 16 NOV 2022 18:12:44

256QAM

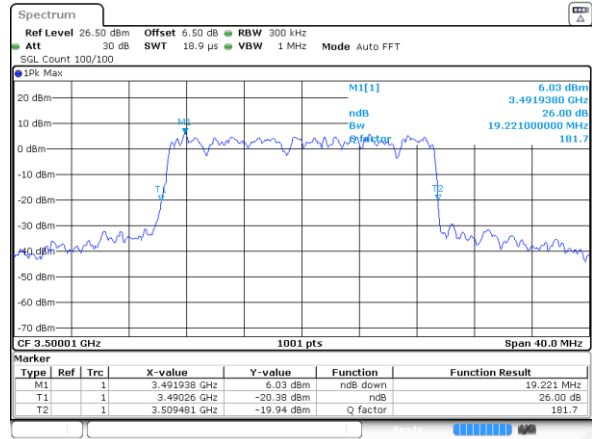


Date: 16 NOV 2022 18:13:23




30MHz CP

QPSK

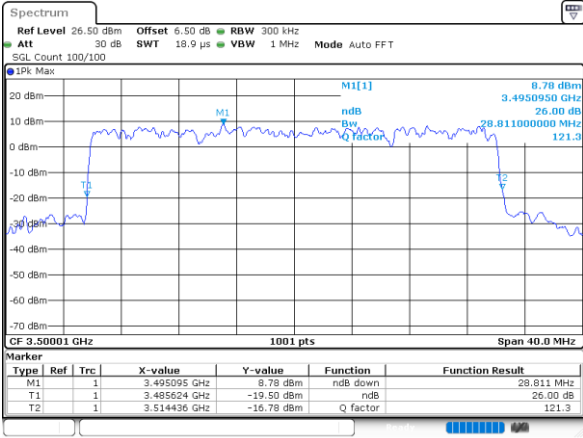


Date: 20.OCT.2022 18:42:29

16QAM

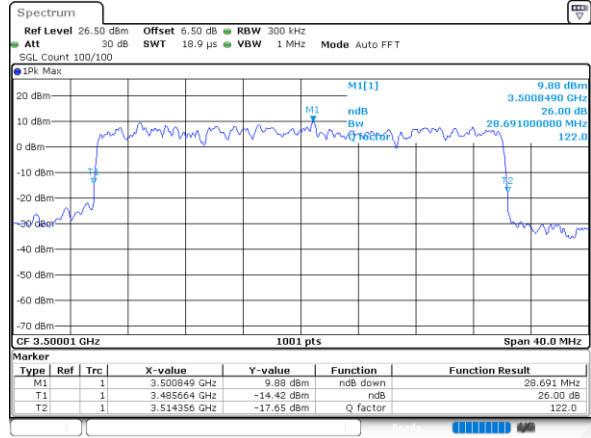


Date: 20.OCT.2022 18:41:59

64QAM

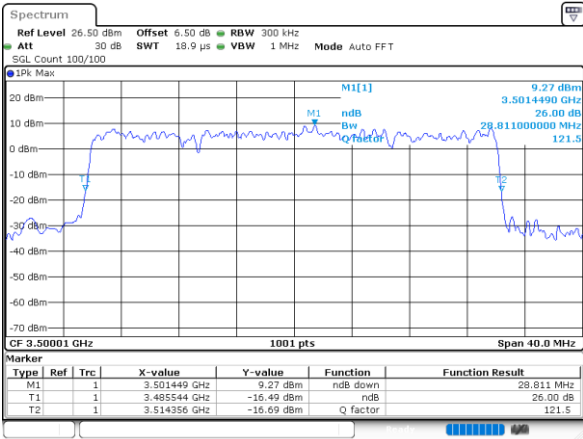

Date: 20.OCT.2022 18:41:36

256QAM

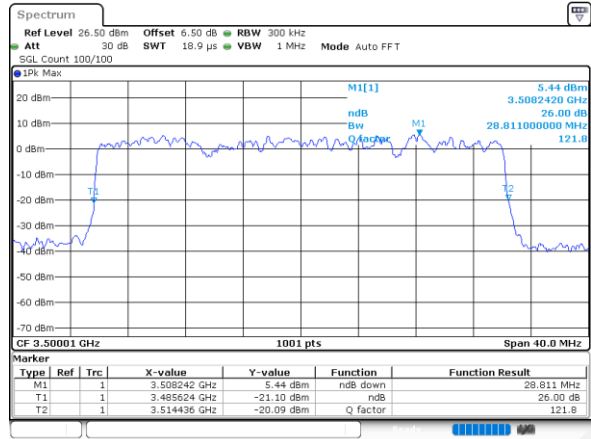


Date: 20.OCT.2022 18:41:15




40MHz CP

QPSK

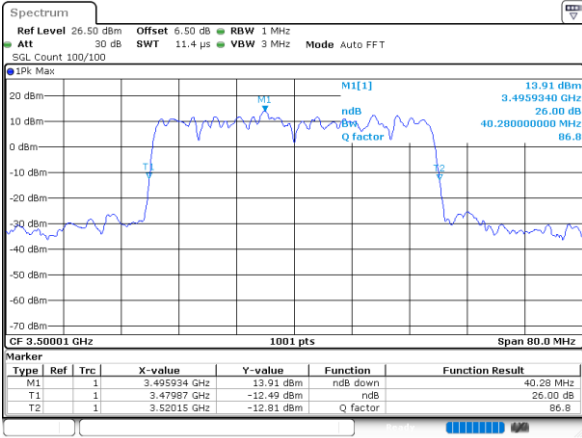


Date: 20.OCT.2022 18:39:17

16QAM

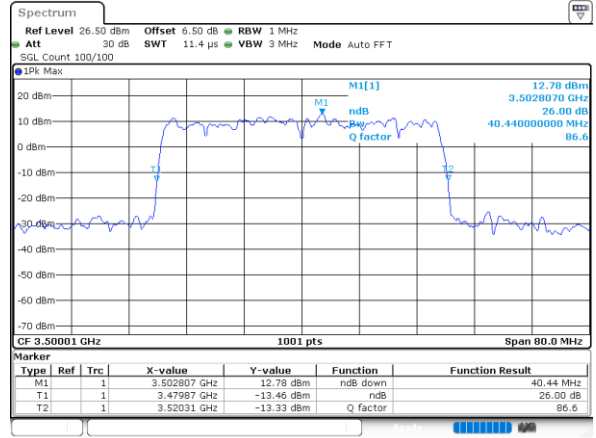


Date: 20.OCT.2022 18:39:34

64QAM

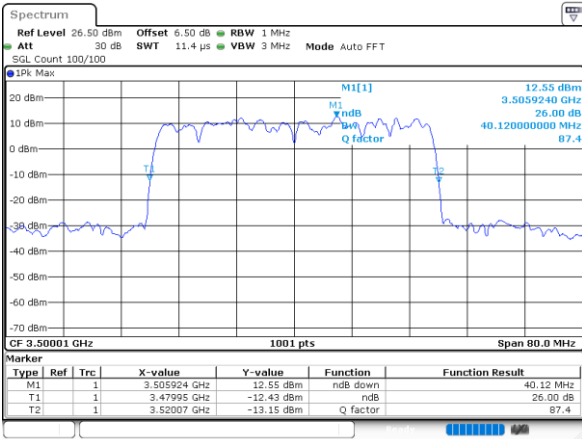

Date: 20.OCT.2022 18:39:55

256QAM

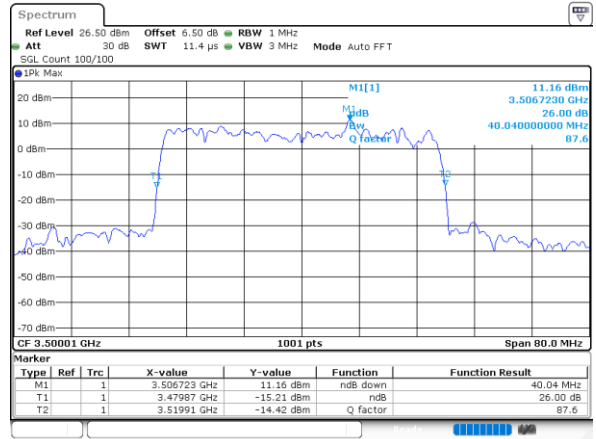


Date: 20.OCT.2022 18:40:14




50MHz CP

QPSK

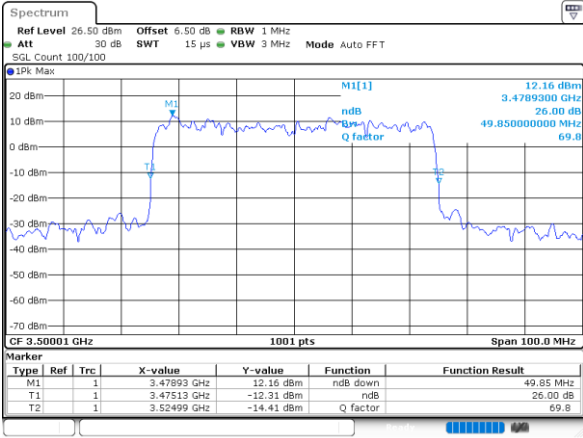


Date: 20.OCT.2022 18:38:10

16QAM

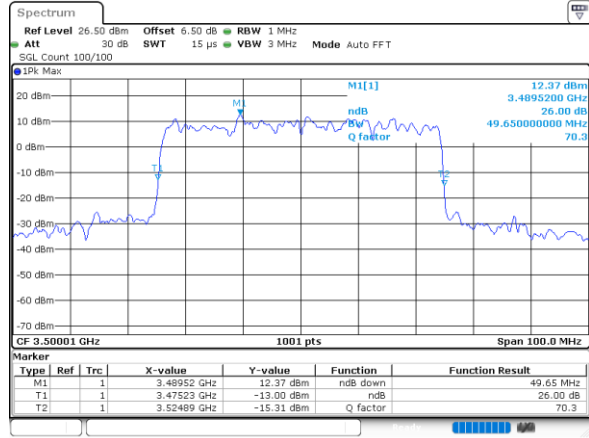


Date: 20.OCT.2022 18:37:52

64QAM

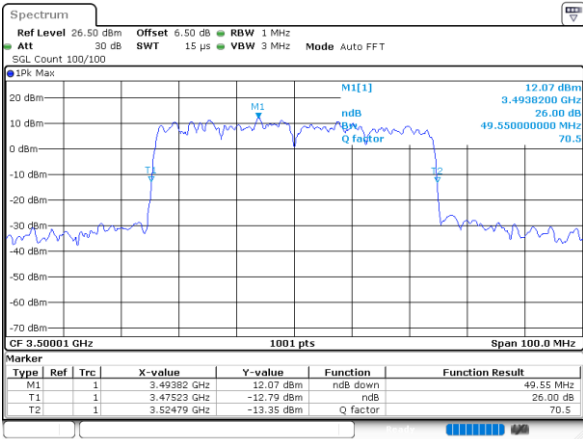

Date: 20.OCT.2022 18:37:34

256QAM

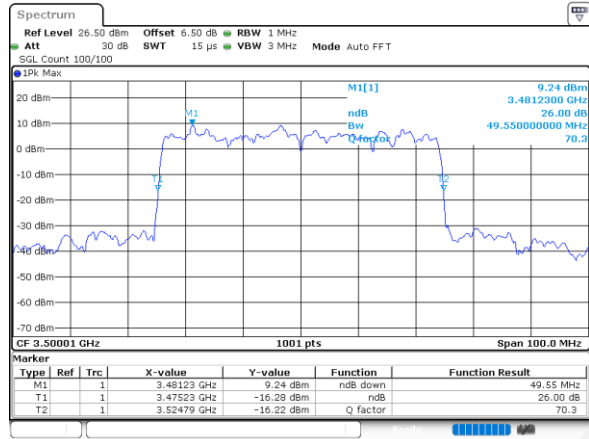


Date: 20.OCT.2022 18:37:12




60MHz CP

QPSK

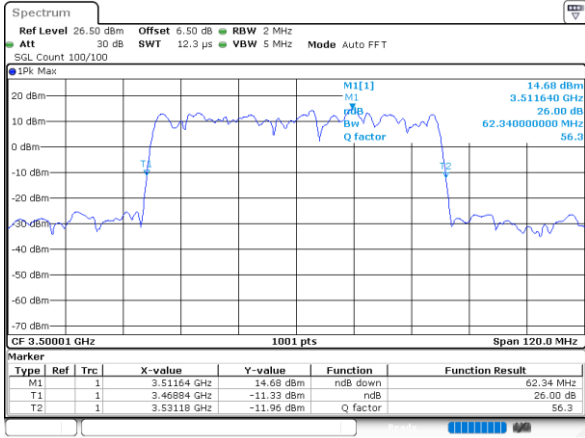


Date: 20.OCT.2022 18:35:41

16QAM

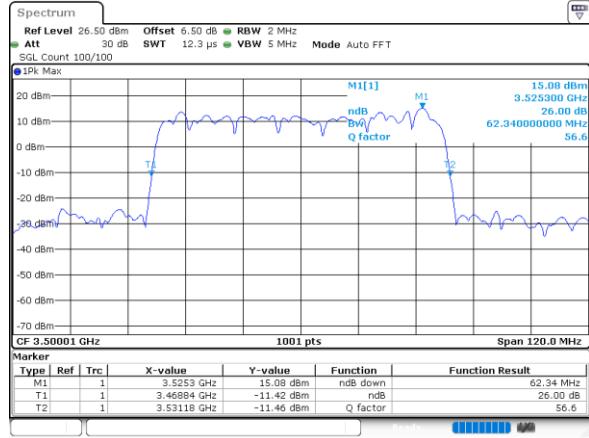


Date: 20.OCT.2022 18:36:01

64QAM

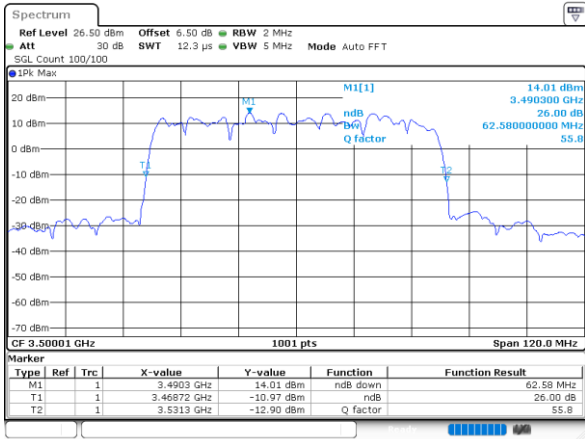

Date: 20.OCT.2022 18:36:20

256QAM

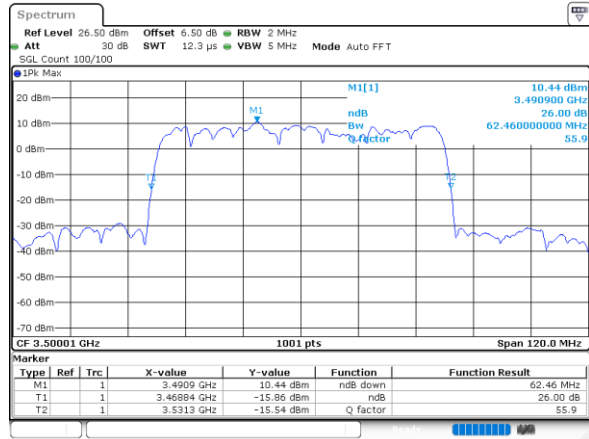


Date: 20.OCT.2022 18:36:43




70MHz CP

QPSK

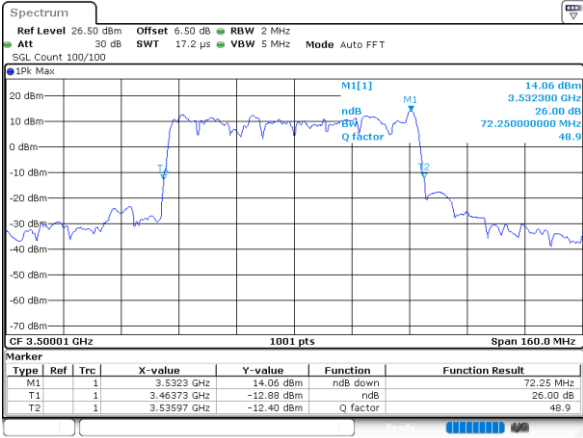


Date: 20.OCT.2022 18:34:59

16QAM

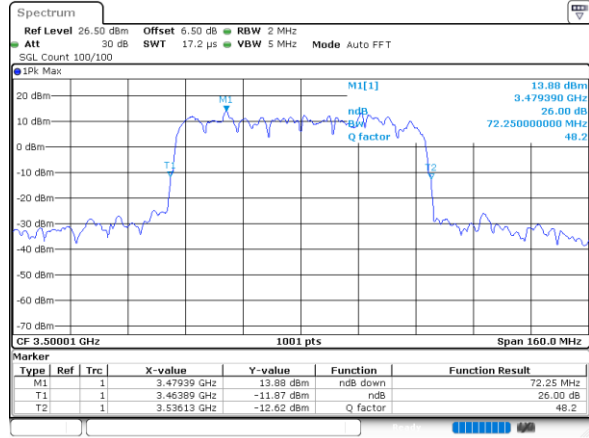


Date: 20.OCT.2022 18:34:19

64QAM

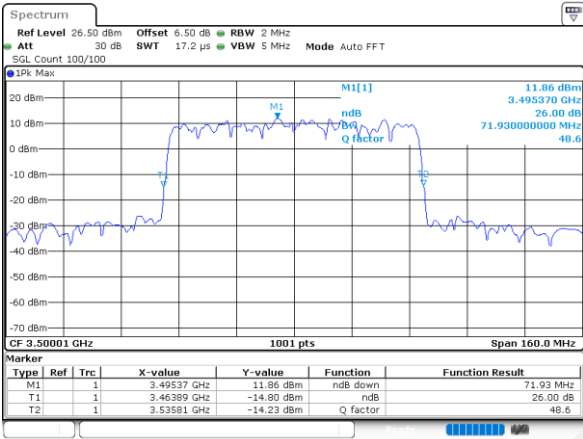

Date: 20.OCT.2022 18:33:59

256QAM

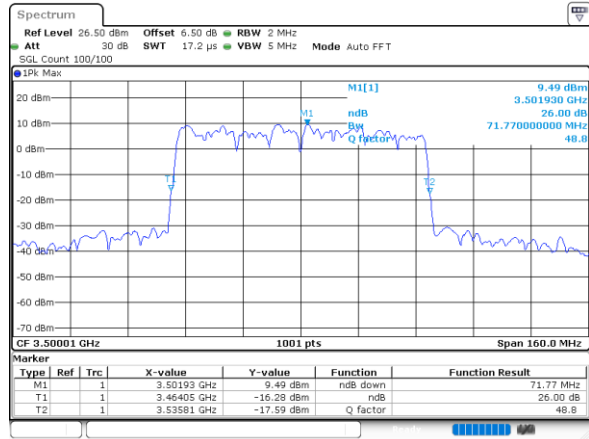


Date: 20.OCT.2022 18:33:41




80MHz CP

QPSK

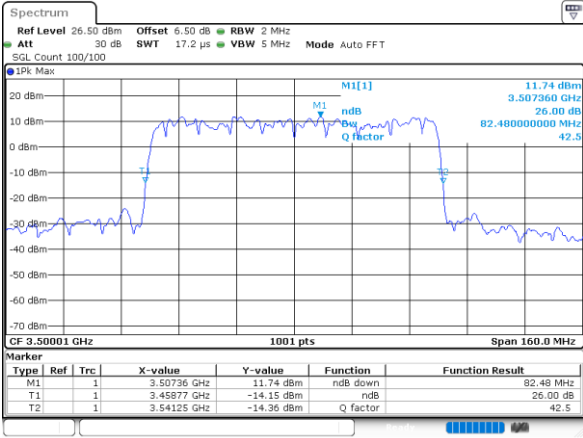


Date: 20.OCT.2022 18:31:29

16QAM

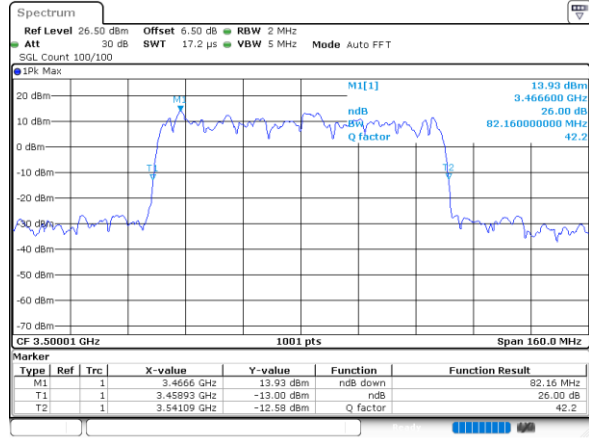


Date: 20.OCT.2022 18:32:10

64QAM

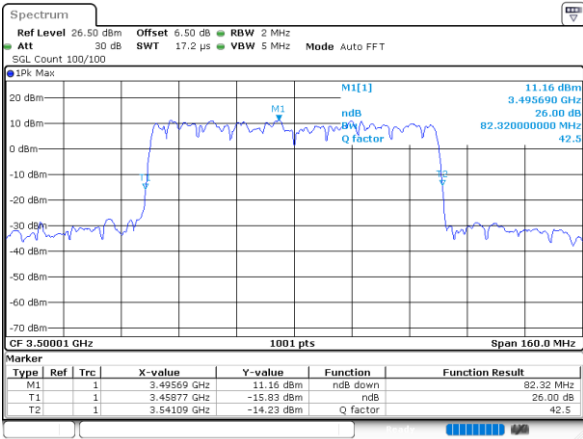

Date: 20.OCT.2022 18:32:41

256QAM

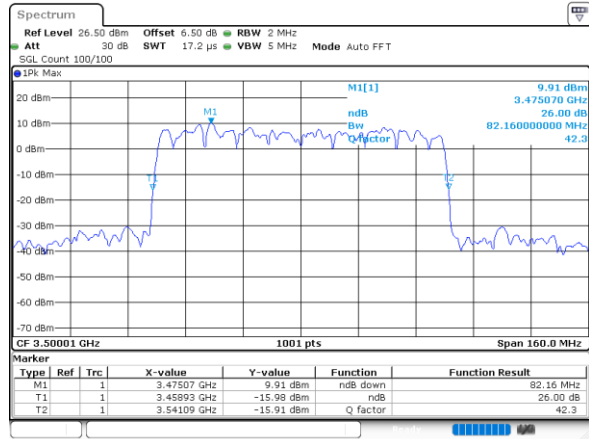


Date: 20.OCT.2022 18:33:01




90MHz CP

QPSK

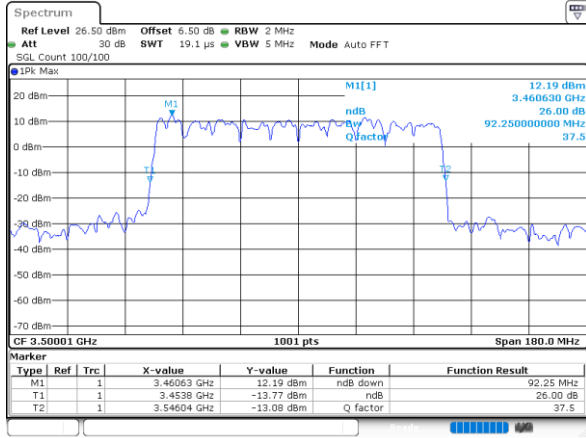


Date: 20.OCT.2022 18:30:58

16QAM

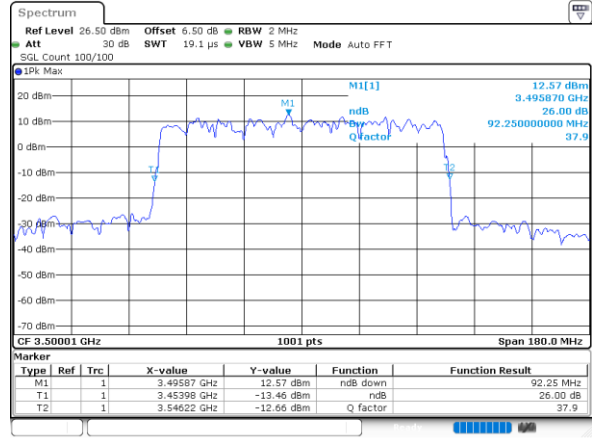


Date: 20.OCT.2022 18:30:39

64QAM

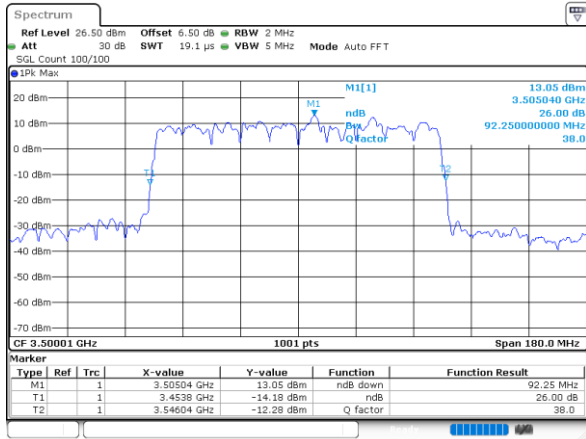

Date: 20.OCT.2022 18:30:20

256QAM

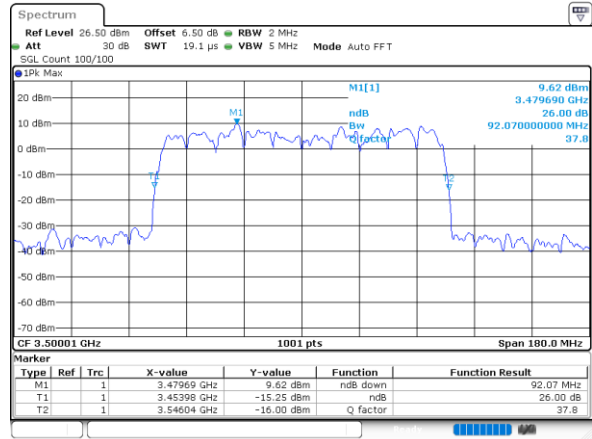


Date: 20.OCT.2022 18:29:59




100MHz CP

QPSK

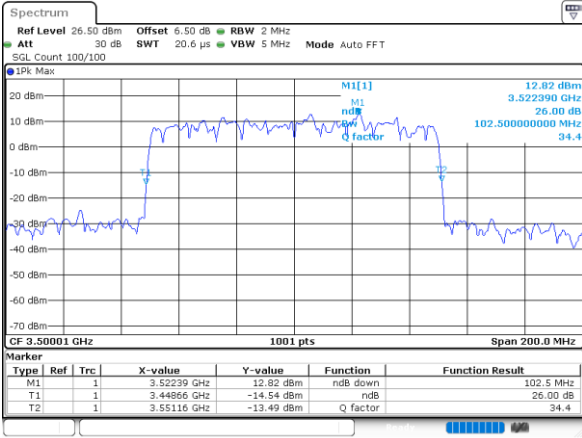


Date: 20.OCT.2022 18:27:56

16QAM

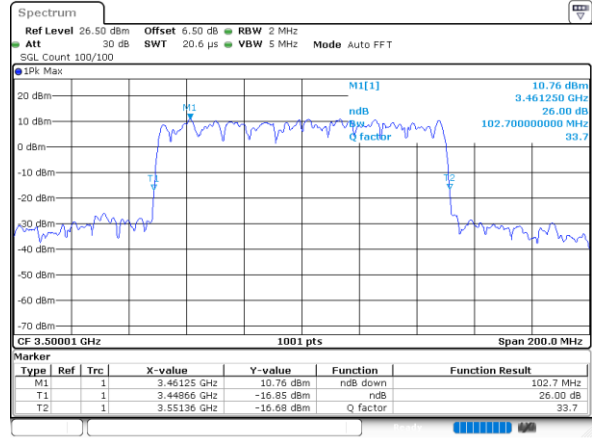


Date: 20.OCT.2022 18:28:15

64QAM

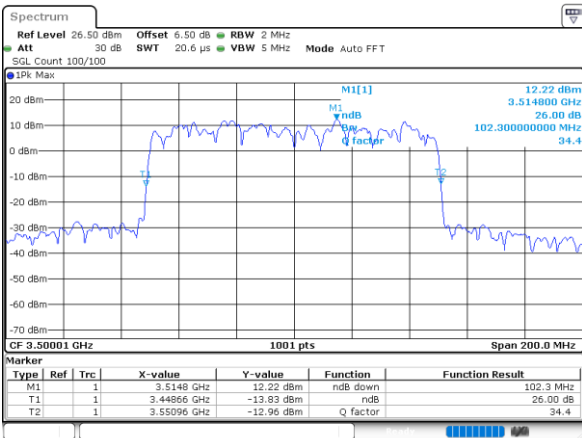

Date: 20.OCT.2022 18:28:34

256QAM

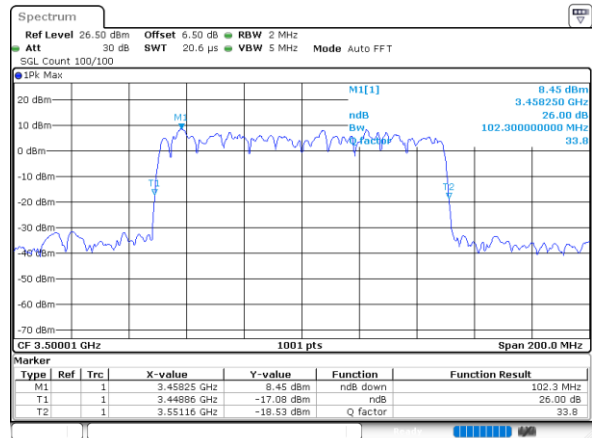

Date: 20.OCT.2022 18:28:56

Occupied Bandwidth



Mode	FR1 n78 : OB BW(20 MHz) / CP OFDM			
BW	CP			
Mod.	QPSK	16QAM	64QAM	256QAM
Middle CH	18.22	18.22	18.14	18.26
Mode	FR1 n78 : OB BW(30 MHz) / CP OFDM			
Mod.	QPSK	16QAM	64QAM	256QAM
Middle CH	27.81	27.85	27.89	27.81
Mode	FR1 n78 : OB BW(40 MHz) / CP OFDM			
Mod.	QPSK	16QAM	64QAM	256QAM
Middle CH	38.04	38.04	38.12	37.96
Mode	FR1 n78 : OB BW(50 MHz) / CP OFDM			
Mod.	QPSK	16QAM	64QAM	256QAM
Middle CH	47.45	47.65	47.65	47.65
Mode	FR1 n78 : OB BW(60 MHz) / CP OFDM			
Mod.	QPSK	16QAM	64QAM	256QAM
Middle CH	58.98	58.26	58.39	58.26
Mode	FR1 n78 : OB BW(70 MHz) / CP OFDM			
Mod.	QPSK	16QAM	64QAM	256QAM
Middle CH	67.45	68.09	68.09	68.09
Mode	FR1 n78 : OB BW(80 MHz) / CP OFDM			
Mod.	QPSK	16QAM	64QAM	256QAM
Middle CH	78.16	77.68	77.68	78.32
Mode	FR1 n78 : OB BW(90 MHz) / CP OFDM			
Mod.	QPSK	16QAM	64QAM	256QAM
Middle CH	87.39	87.21	87.39	87.75
Mode	FR1 n78 : OB BW(100 MHz) / CP OFDM			
Mod.	QPSK	16QAM	64QAM	256QAM
Middle CH	97.10	97.50	97.50	97.90



20MHz CP

QPSK

16QAM

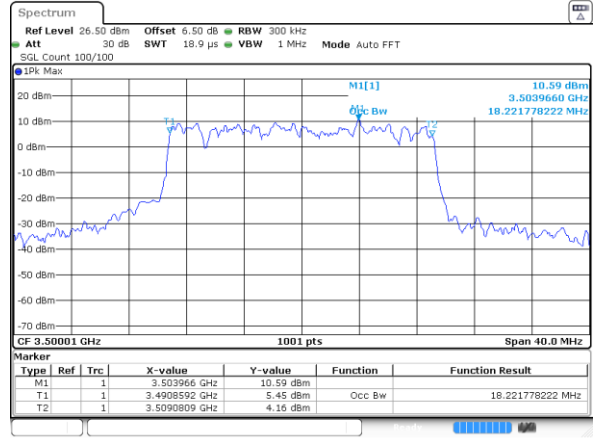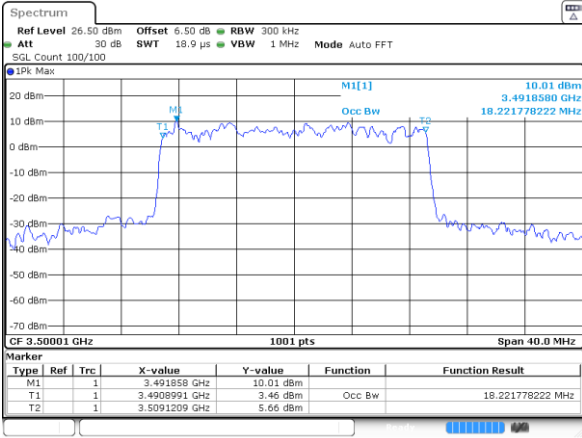


Date: 16 NOV 2022 18:10:11


Date: 16 NOV 2022 18:11:42

64QAM

256QAM

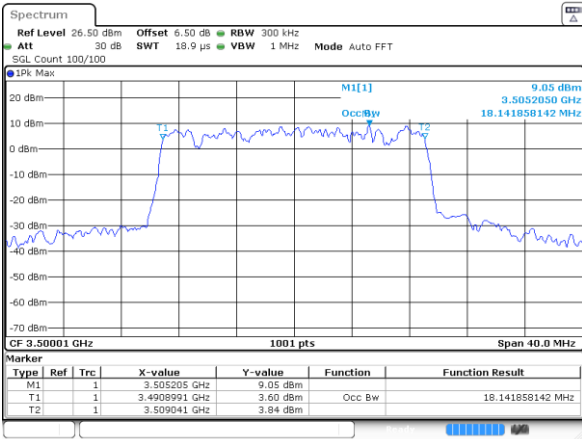

Date: 16 NOV 2022 18:12:31

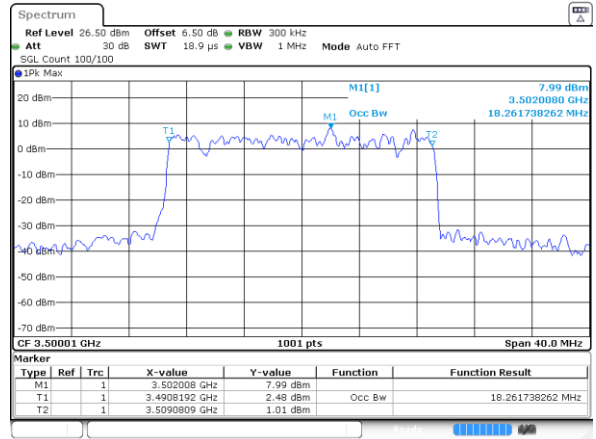


Date: 16 NOV 2022 18:13:10




30MHz CP


QPSK

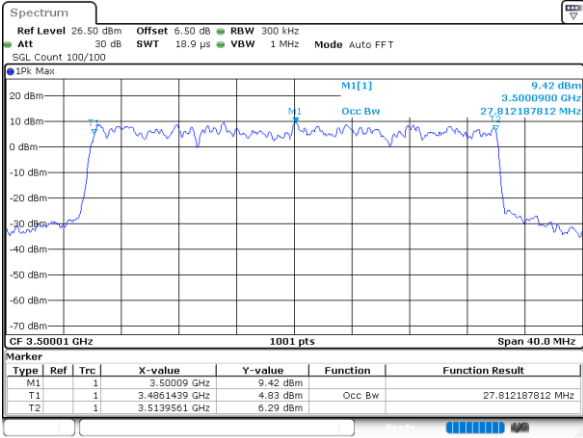


16QAM

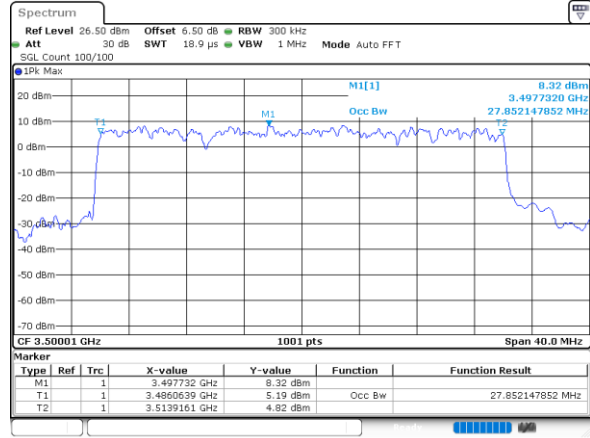

64QAM

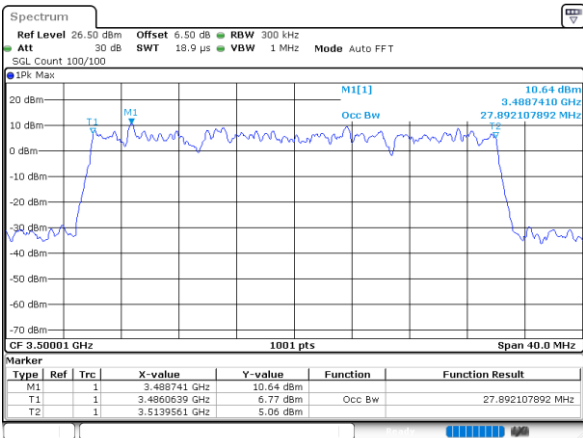


256QAM

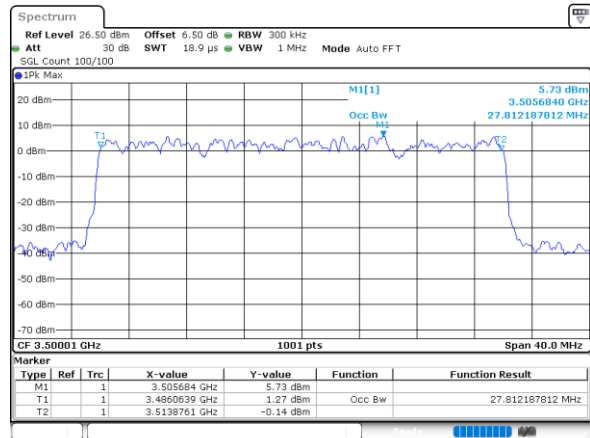




40MHz CP

QPSK

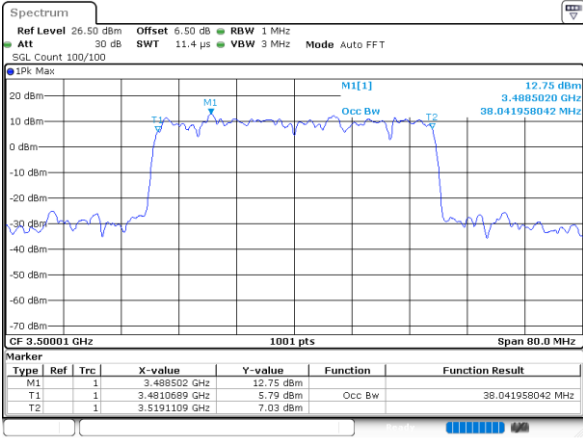


Date: 20.OCT.2022 18:39:11

16QAM

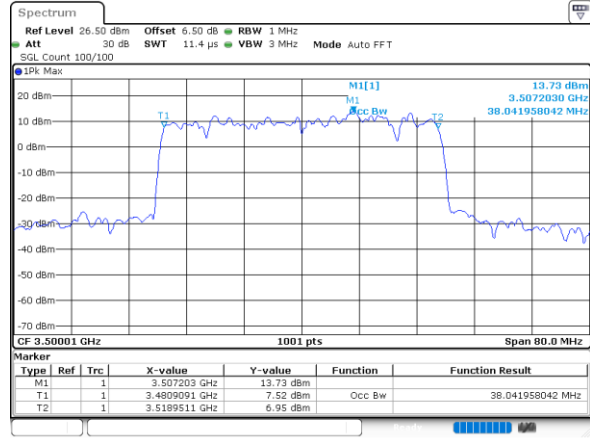


Date: 20.OCT.2022 18:39:27

64QAM

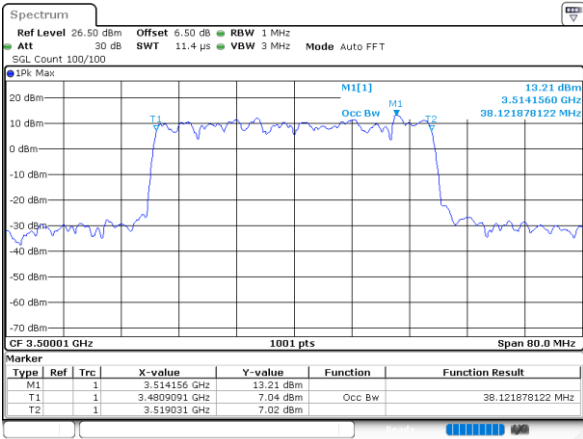

Date: 20.OCT.2022 18:39:46

256QAM

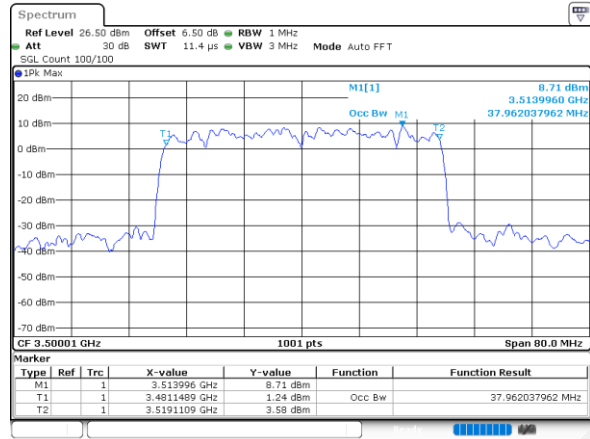


Date: 20.OCT.2022 18:40:06




50MHz CP

QPSK

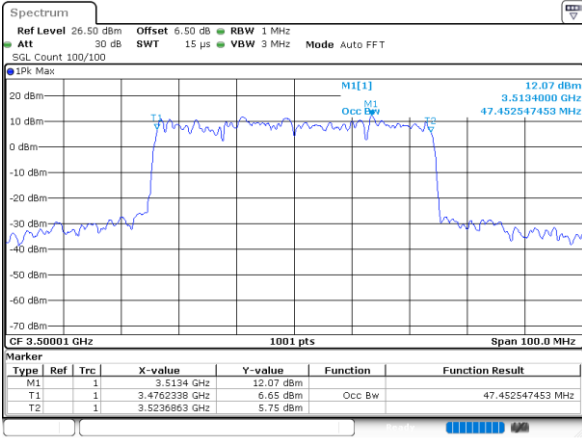


Date: 20.OCT.2022 18:38:03

16QAM

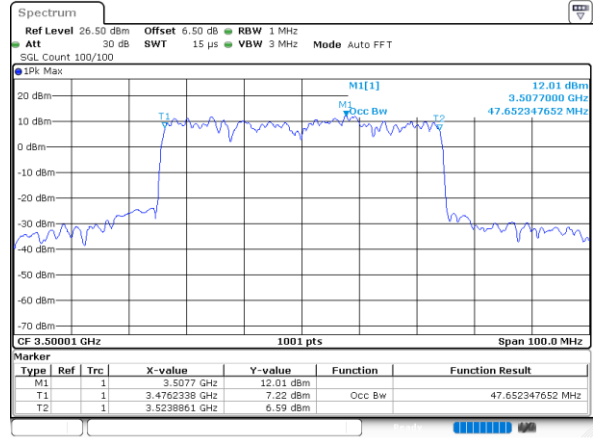


Date: 20.OCT.2022 18:37:45

64QAM

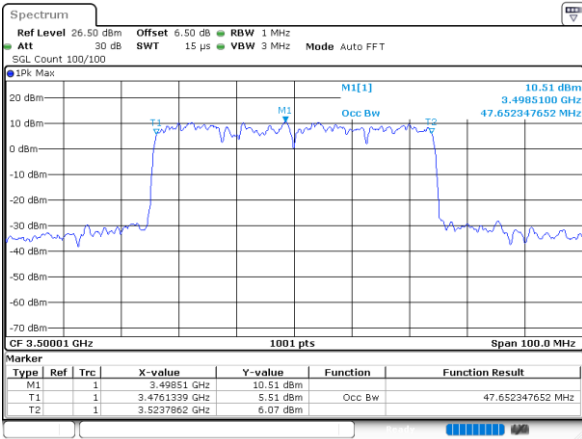

Date: 20.OCT.2022 18:37:27

256QAM

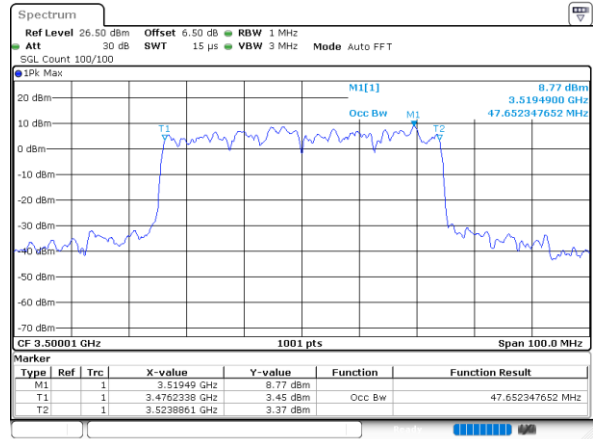


Date: 20.OCT.2022 18:37:06




60MHz CP

QPSK

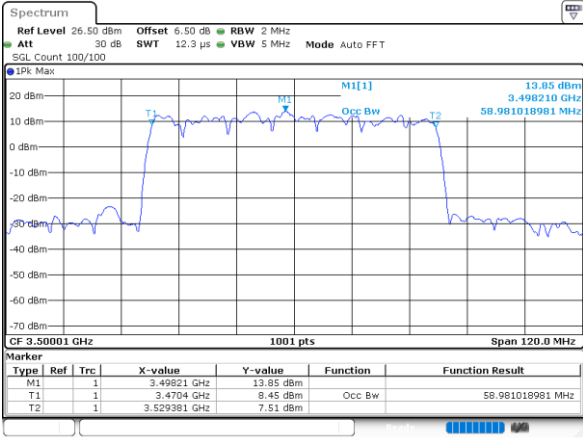


Date: 20.OCT.2022 18:35:33

16QAM

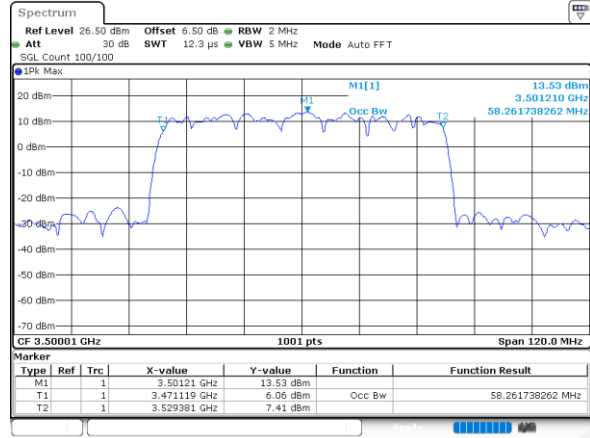


Date: 20.OCT.2022 18:35:54

64QAM

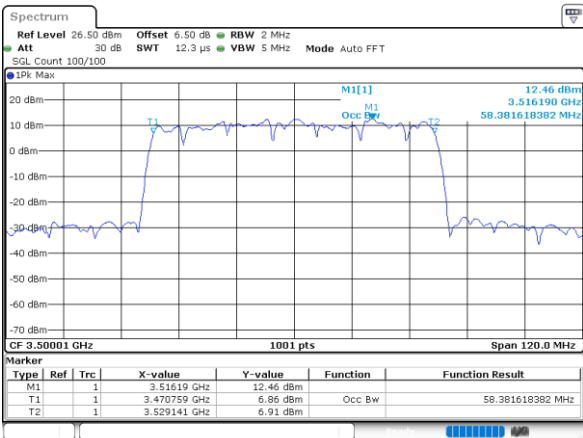

Date: 20.OCT.2022 18:36:13

256QAM

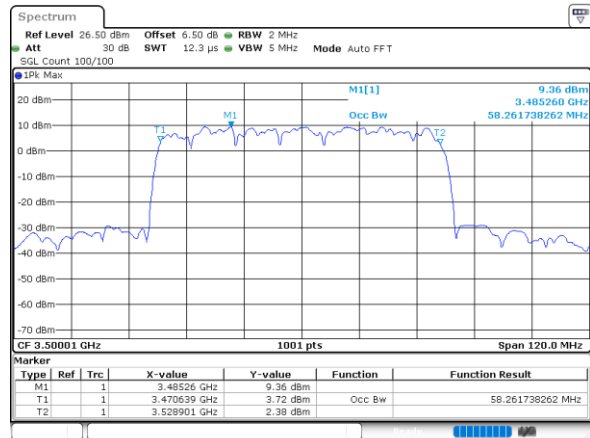


Date: 20.OCT.2022 18:36:37




70MHz CP

QPSK

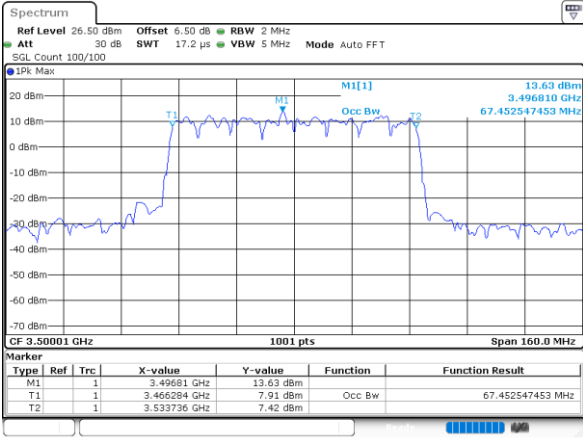


Date: 20.OCT.2022 18:34:31

16QAM

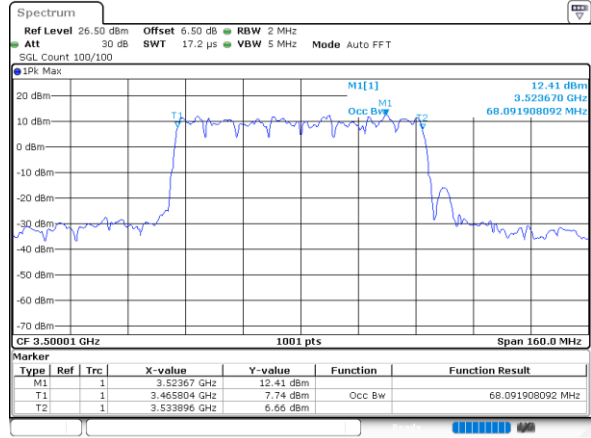


Date: 20.OCT.2022 18:34:11

64QAM

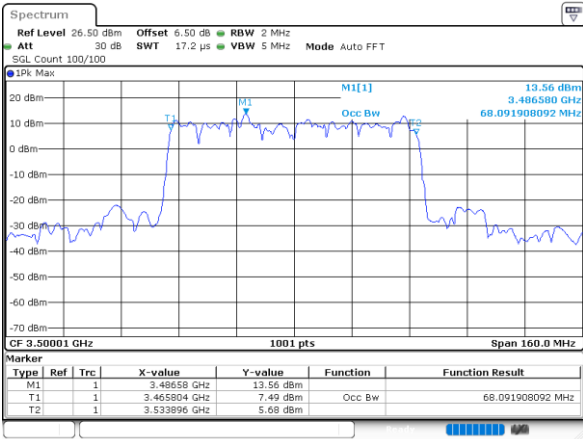

Date: 20.OCT.2022 18:33:52


256QAM

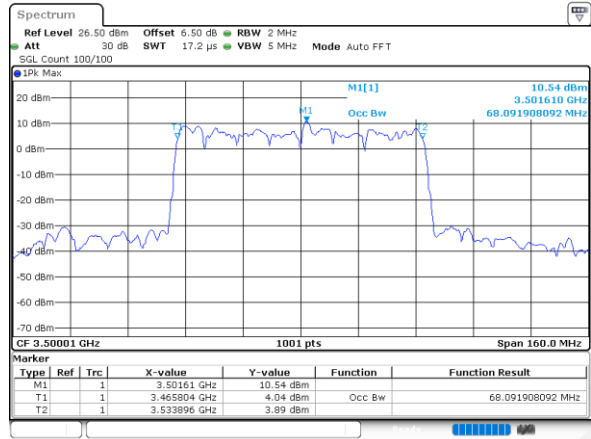

Date: 20.OCT.2022 18:33:26


80MHz CP

QPSK

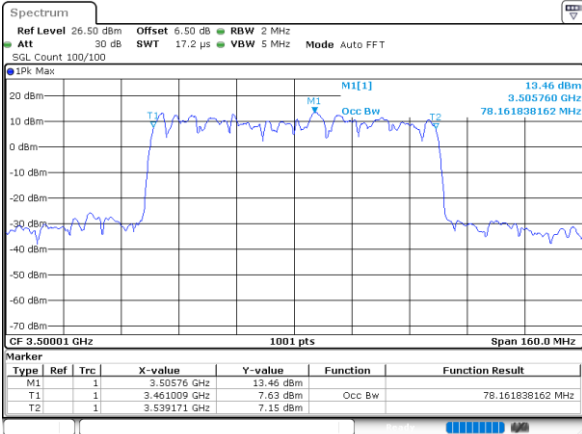


Date: 20.OCT.2022 18:31:22

16QAM

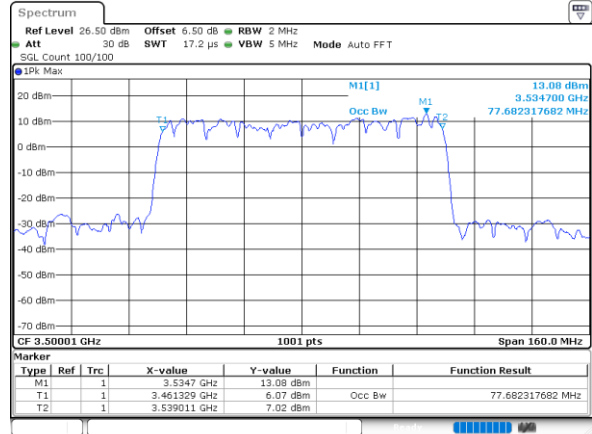


Date: 20.OCT.2022 18:31:56

64QAM

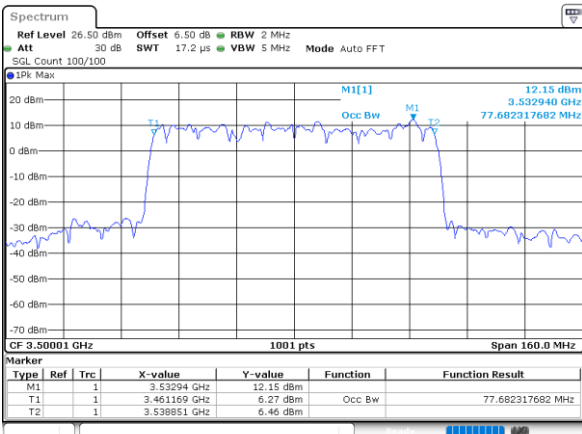

Date: 20.OCT.2022 18:32:21

256QAM

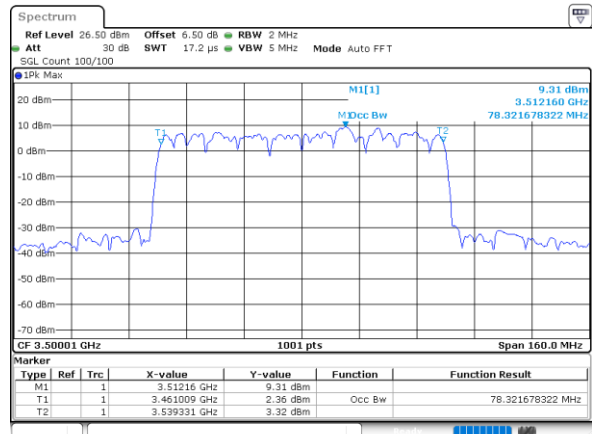


Date: 20.OCT.2022 18:32:53




90MHz CP

QPSK

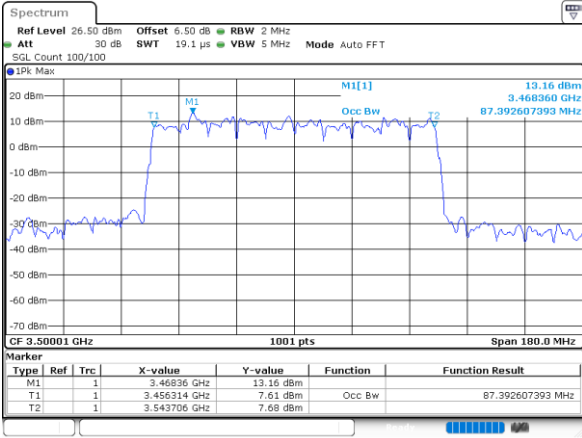


Date: 20.OCT.2022 18:30:50

16QAM

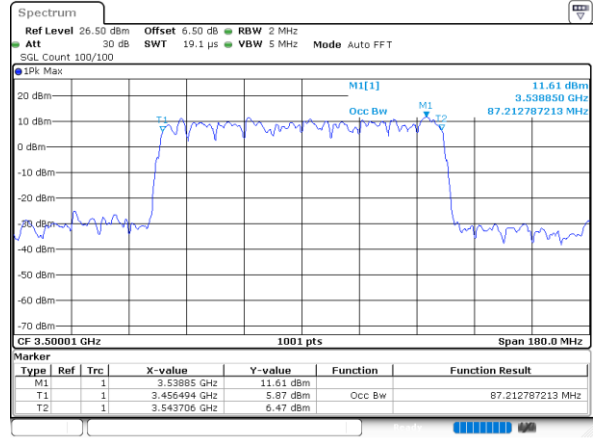


Date: 20.OCT.2022 18:30:31

64QAM

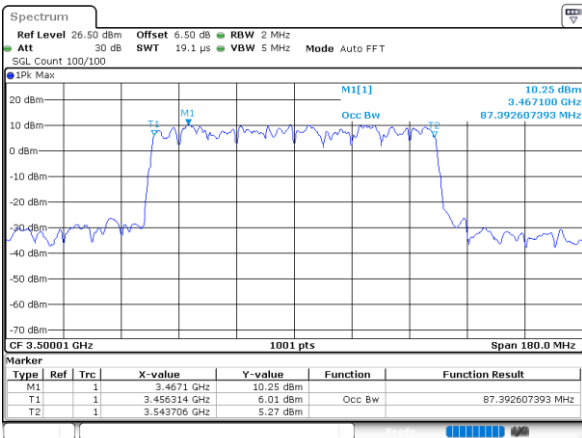

Date: 20.OCT.2022 18:30:11

256QAM

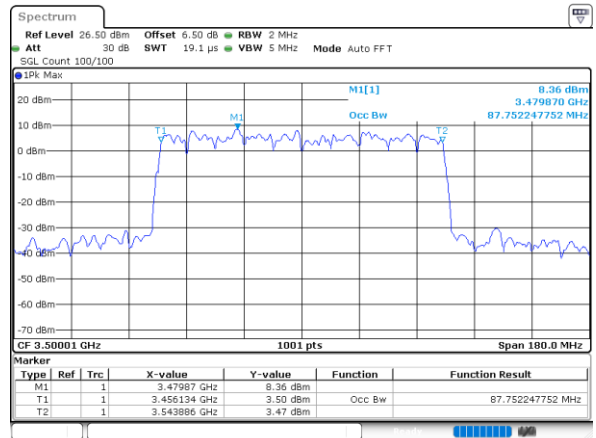


Date: 20.OCT.2022 18:29:52




100MHz CP

QPSK

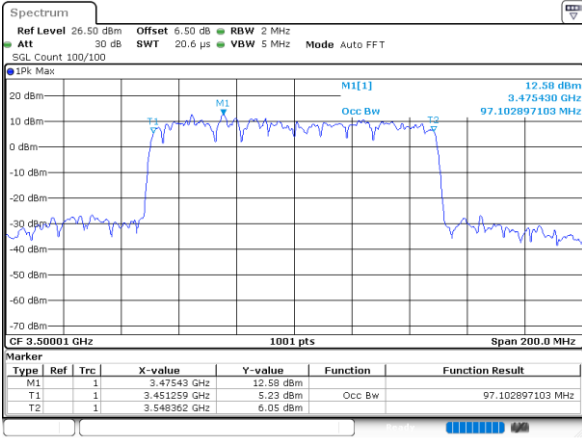


Date: 20.OCT.2022 18:27:42

16QAM

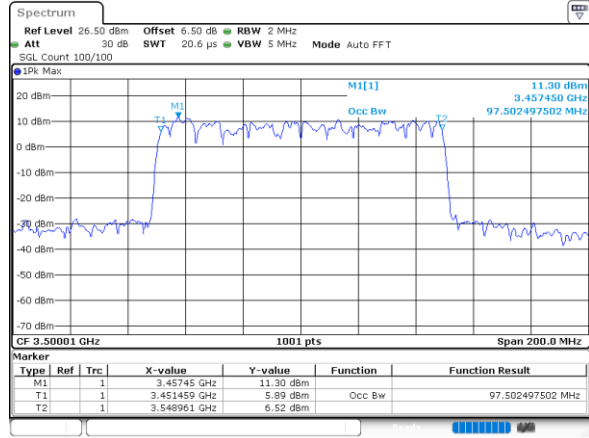


Date: 20.OCT.2022 18:28:08

64QAM

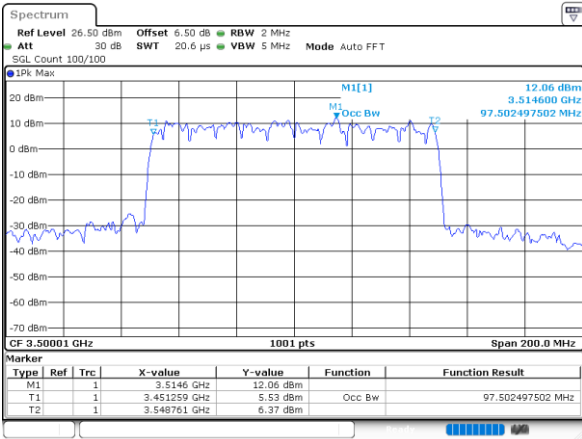


Date: 20.OCT.2022 18:28:27

256QAM

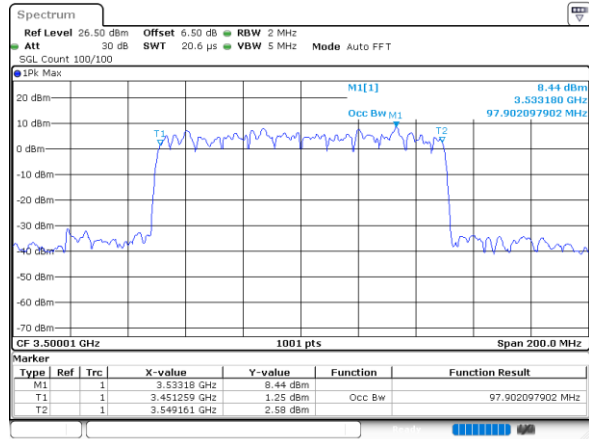

Date: 20.OCT.2022 18:28:48

Conducted Band Edge


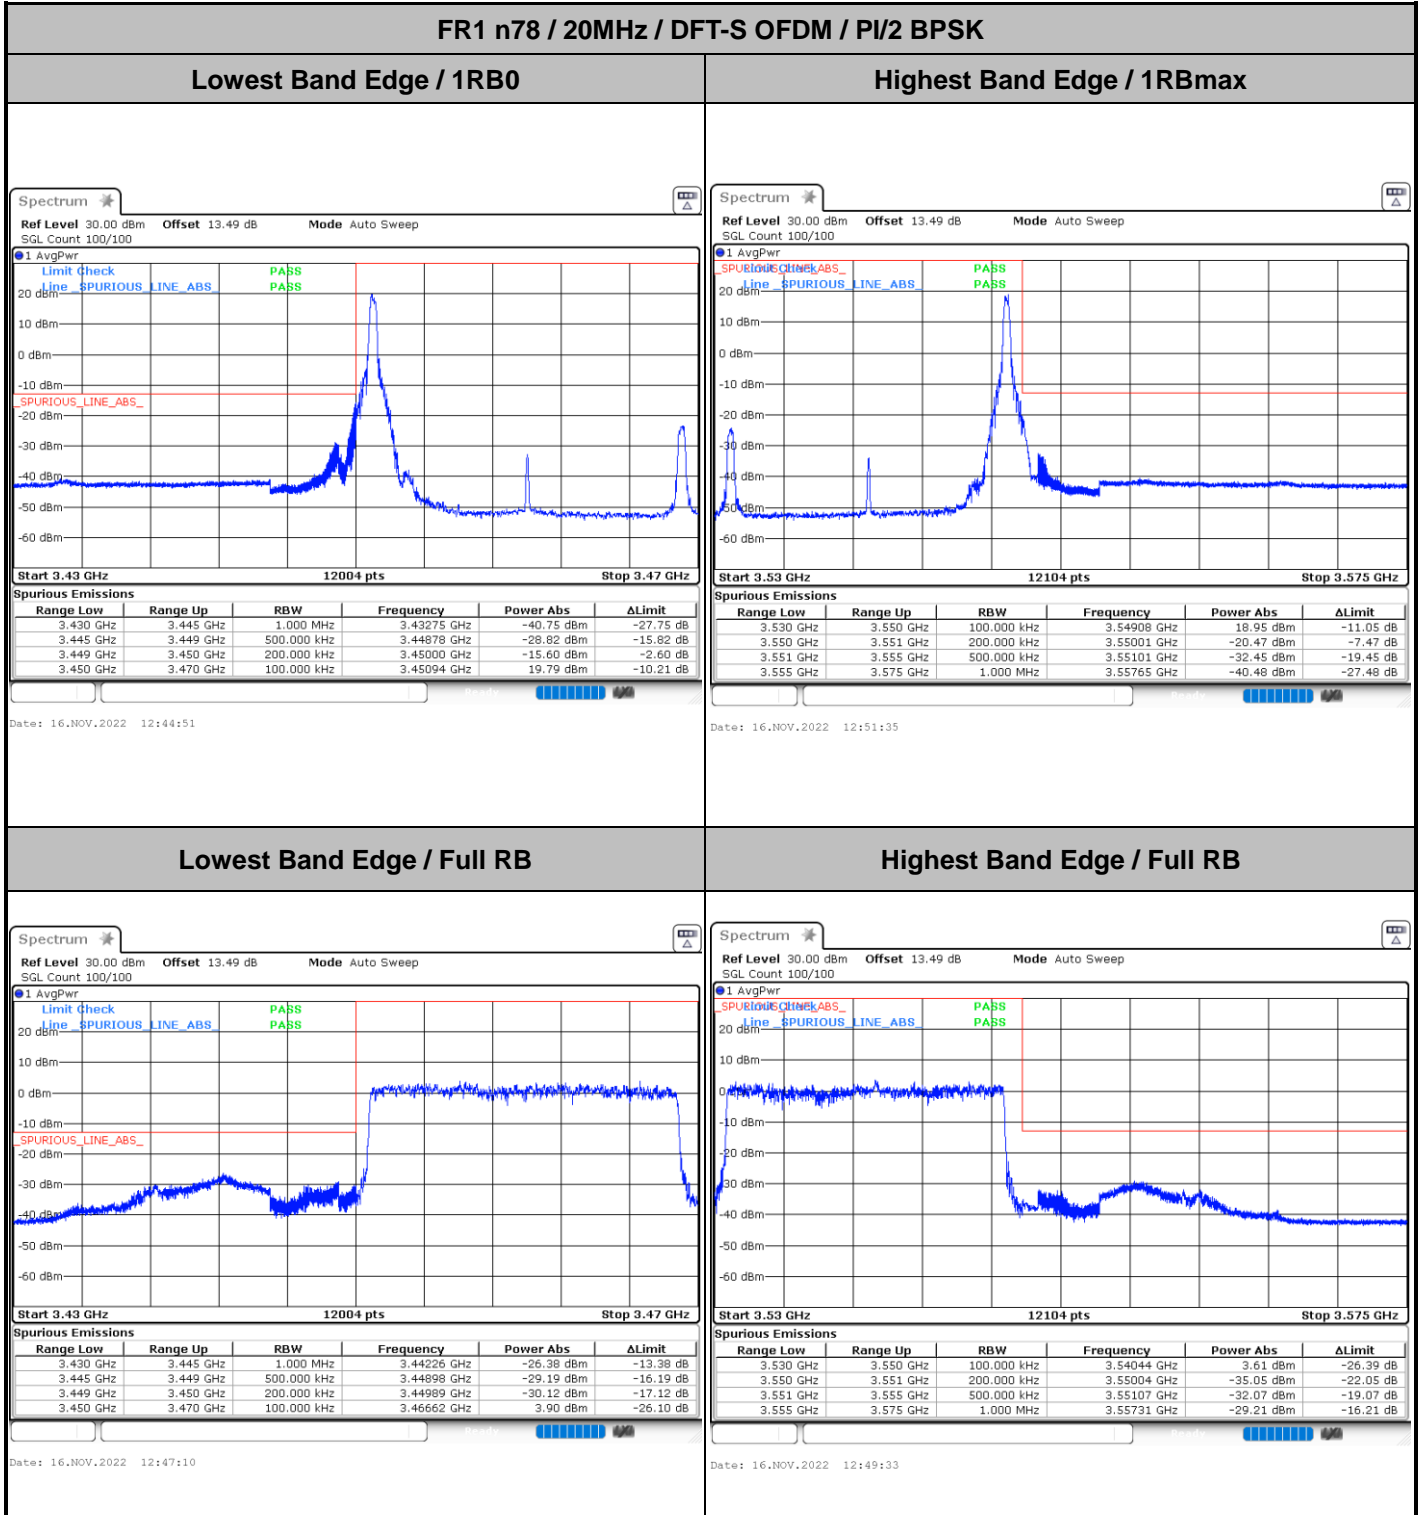




FR1 n78 / 20MHz / DFT-S OFDM / QPSK

Lowest Band Edge / 1RB0

Highest Band Edge / 1RBmax

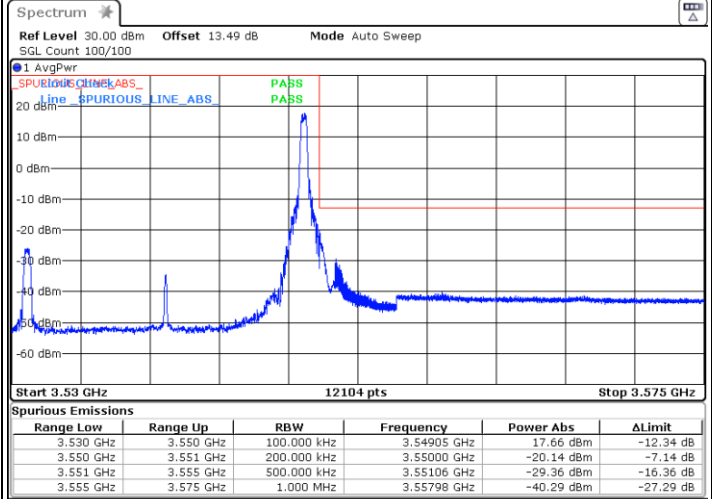
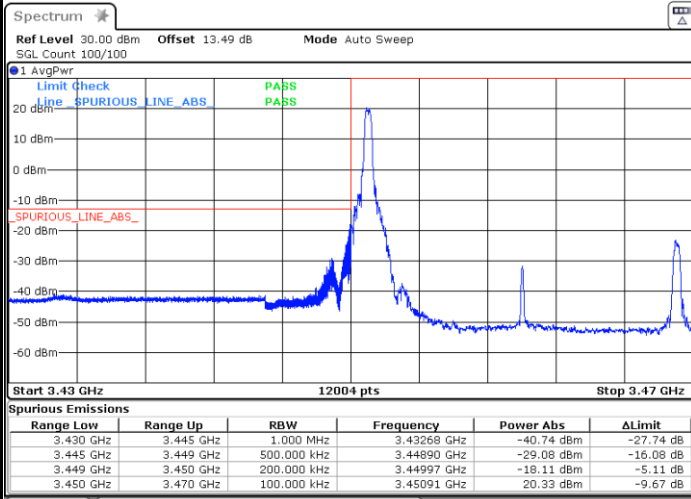


Date: 16.NOV.2022 12:45:27

Date: 16.NOV.2022 12:51:00

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

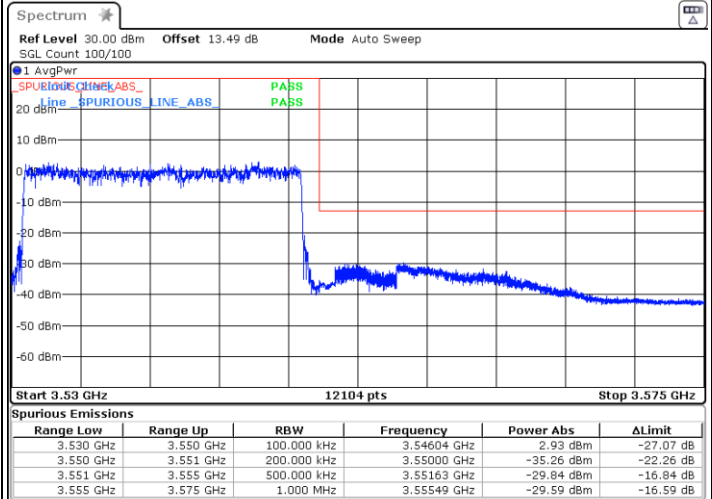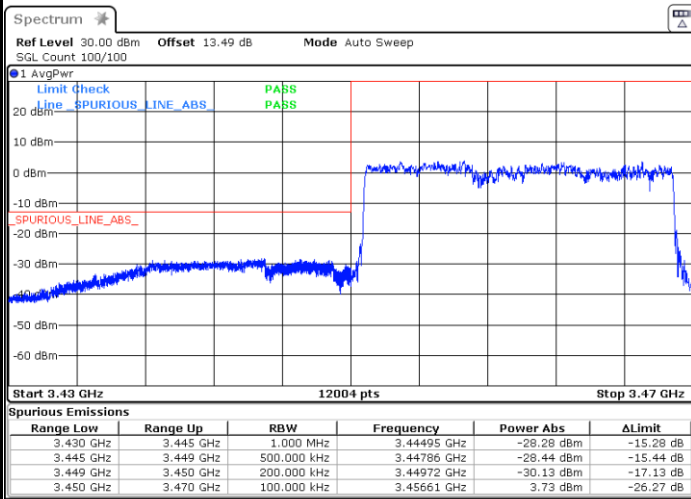

Date: 16.NOV.2022 12:46:23



Date: 16.NOV.2022 12:50:09



FR1 n78 / 60MHz / DFT-S OFDM / PI/2 BPSK

Lowest Band Edge / 1RB0

Highest Band Edge / 1RBmax

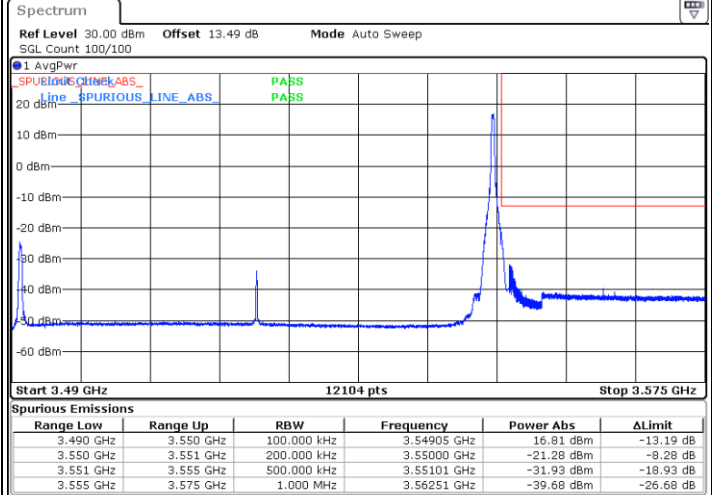
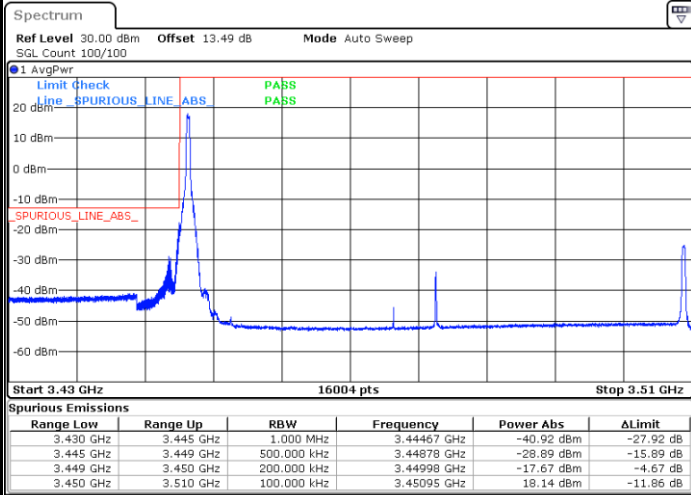


Date: 20.OCT.2022 17:57:35

Date: 20.OCT.2022 18:11:18

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

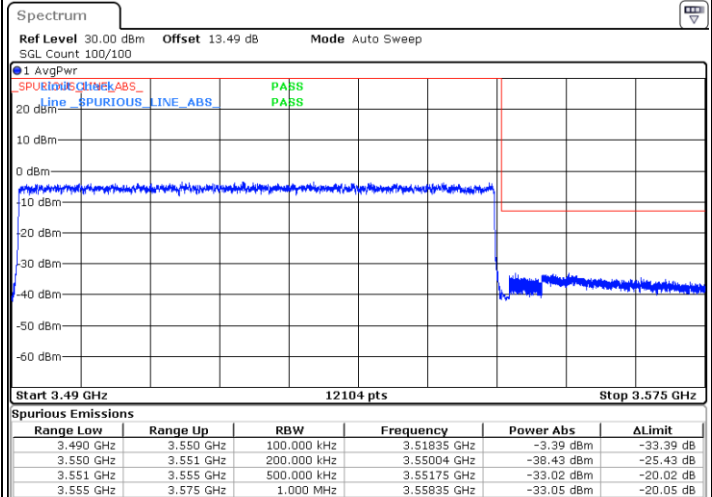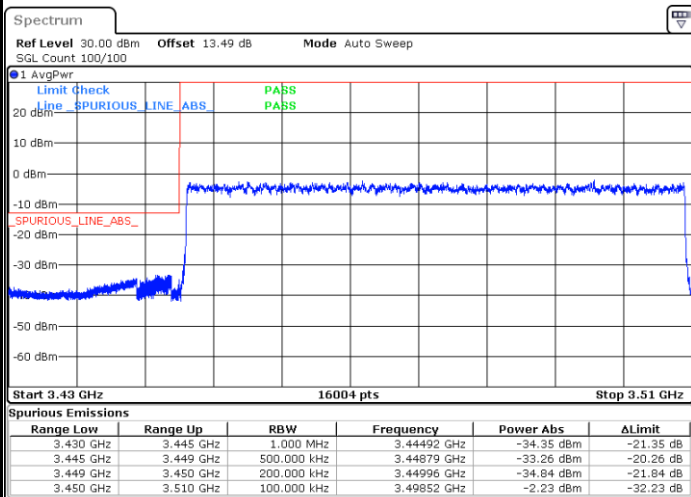

Date: 20.OCT.2022 17:59:38



Date: 20.OCT.2022 18:10:23



FR1 n78 / 60MHz / DFT-S OFDM / QPSK

Lowest Band Edge / 1RB0

Highest Band Edge / 1RBmax

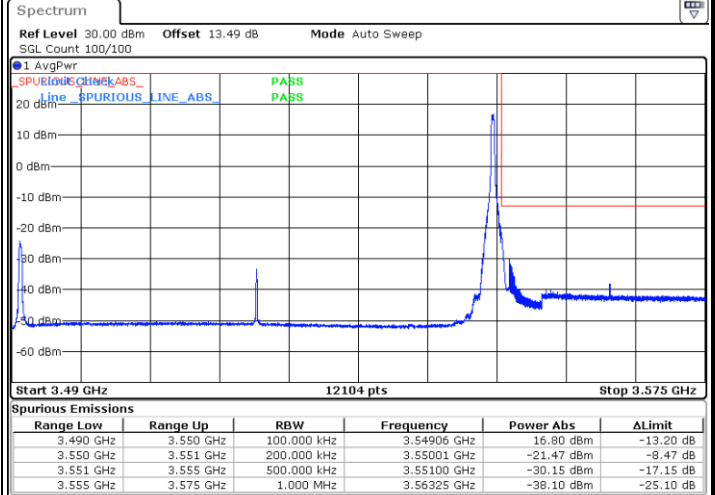
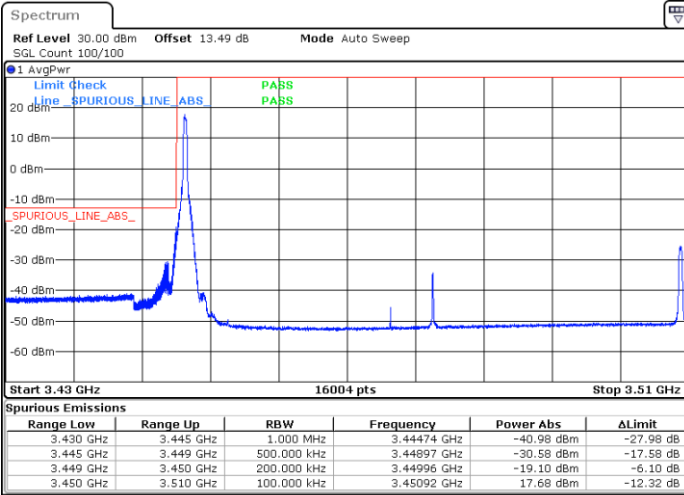


Date: 20.OCT.2022 17:58:13

Date: 20.OCT.2022 18:12:36

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

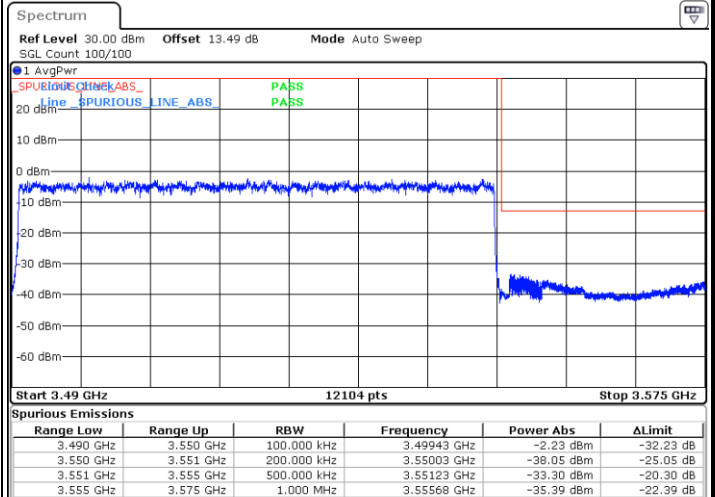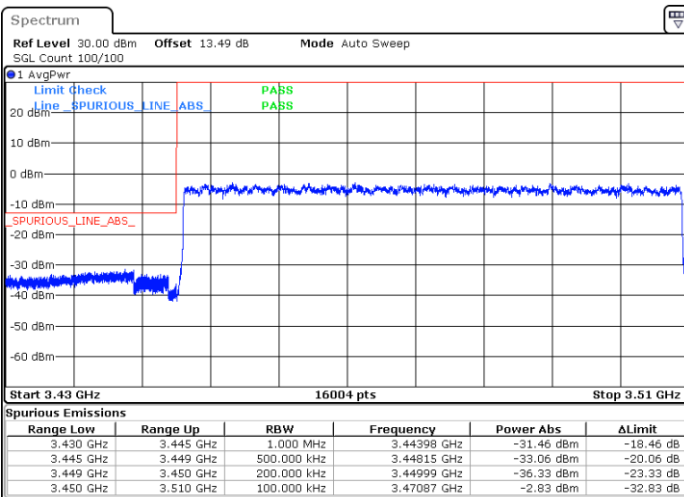

Date: 20.OCT.2022 17:59:02



Date: 20.OCT.2022 18:08:19



FR1 n78 / 100MHz / DFT-S OFDM / PI/2 BPSK

Lowest Band Edge / 1RB0

Highest Band Edge / 1RBmax

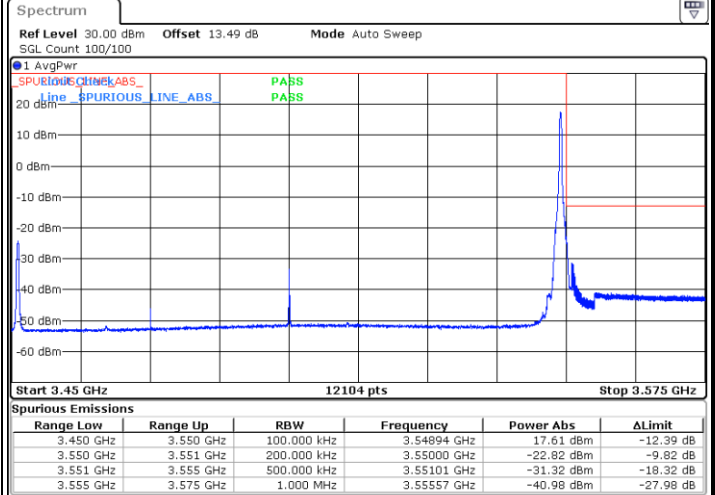
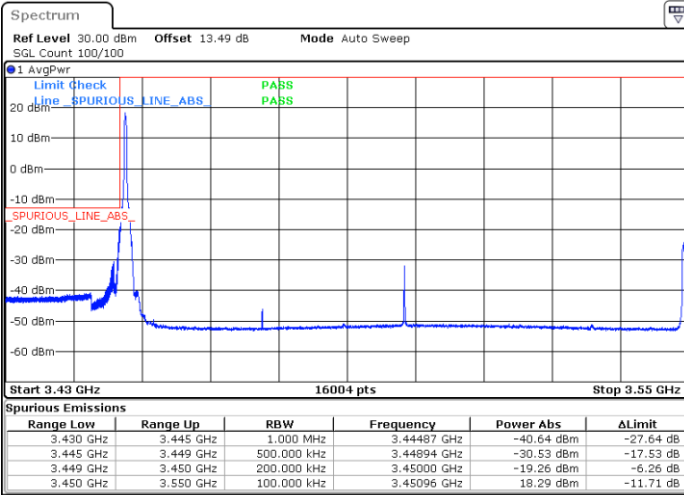


Date: 20.OCT.2022 18:15:24

Date: 20.OCT.2022 18:20:03

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

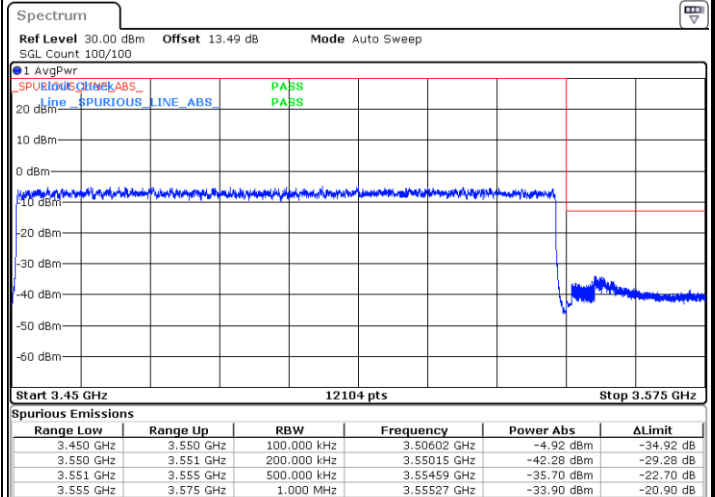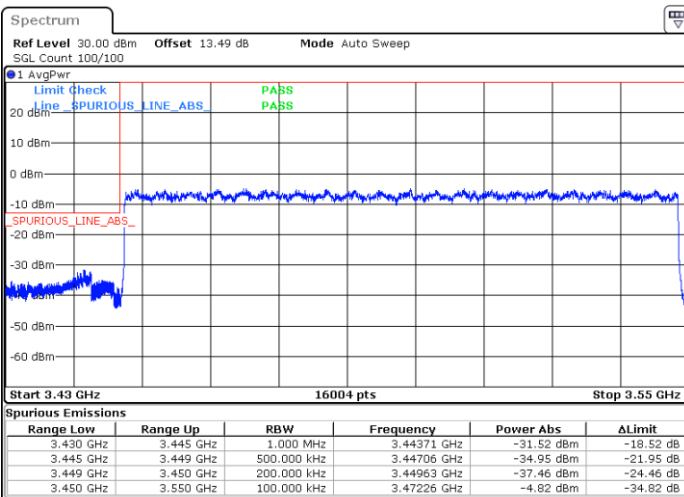

Date: 20.OCT.2022 18:17:27

Date: 20.OCT.2022 18:19:27