



# FCC RF Test Report

**APPLICANT** : Motorola Mobility LLC  
**EQUIPMENT** : Mobile Cellular Phone  
**BRAND NAME** : Motorola  
**MODEL NAME** : XT2313-3, XT2313-4, XT2313-6  
**FCC ID** : IHDT56AJ8  
**STANDARD** : 47 CFR Part 2, 27  
**CLASSIFICATION** : PCS Licensed Transmitter Held to Ear (PCE)  
**TEST DATE(S)** : Dec. 01, 2022 ~ Dec. 23, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (Shenzhen).

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

*Jason Jia*



Approved by: Jason Jia

**Sporton International Inc. (Kunshan)**

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu  
Province 215300 People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY...3
SUMMARY OF TEST RESULT...4
1 GENERAL DESCRIPTION...5
1.1 Applicant...5
1.2 Manufacturer...5
1.3 Product Feature of Equipment Under Test...5
1.4 Product Specification of Equipment Under Test...5
1.5 Specification of Accessory...6
1.6 Modification of EUT...6
1.7 Maximum EIRP and Emission Designator...6
1.8 Testing Location...7
1.9 Test Software...8
1.10 Applicable Standards...8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST...9
2.1 Test Mode...9
2.2 Connection Diagram of Test System...10
2.3 Support Unit used in test configuration and system...10
2.4 Measurement Results Explanation Example...11
2.5 Frequency List of Low/Middle/High Channels...11
3 CONDUCTED TEST ITEMS...13
3.1 Measuring Instruments...13
3.2 Test Setup...13
3.3 Test Result of Conducted Test...13
3.4 Conducted Output Power and EIRP...14
3.5 Peak-to-Average Ratio...15
3.6 Occupied Bandwidth...16
3.7 Conducted Band Edge...17
3.8 Conducted Spurious Emission...18
3.9 Frequency Stability...19
4 RADIATED TEST ITEMS...20
4.1 Measuring Instruments...20
4.2 Test Setup...20
4.3 Test Result of Radiated Test...21
4.4 Radiated Spurious Emission...22
5 LIST OF MEASURING EQUIPMENT...23
6 UNCERTAINTY OF EVALUATION...24
APPENDIX A. TEST RESULTS OF CONDUCTED TEST
APPENDIX B. TEST RESULTS OF RADIATED TEST
APPENDIX C. TEST SETUP PHOTOGRAPHS



## REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG2N1810P	Rev. 01	Initial issue of report	Jan. 11, 2023



### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§27.50(j)(3)	Equivalent Isotropic Radiated Power (5G NR n77, n78)	EIRP < 1Watt		
3.5	§27.50(j)(4)	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §27.53(l)(2)	Conducted Band Edge Measurement (5G NR n77, n78)	< 43+10log10(P[Watts])	PASS	-
3.8	§2.1051 §27.53(l)(2)	Conducted Spurious Emission (5G NR n77, n78)	< 43+10log10(P[Watts])	PASS	-
3.9	§2.1055 §27.54	Frequency Stability Temperature & Voltage	Within Authorized Band	PASS	-
4.4	§2.1053 §27.53(l)(2)	Radiated Spurious Emission (5G NR n77, n78)	< 43+10log <sub>10</sub> (P[Watts])	PASS	Under limit 32.59 dB at 11106.000 MHz

<b>Declaration of Conformity:</b>
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
<b>Comments and Explanations:</b>
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



# 1 General Description

## 1.1 Applicant

Motorola Mobility LLC  
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.2 Manufacturer

Motorola Mobility LLC  
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2313-3, XT2313-4, XT2313-6
FCC ID	IHDT56AJ8
IMEI Code	Conducted : 353054820021756 Radiation : 353054820015733
HW Version	DVT2
SW Version	T1TPN33.13
EUT Stage	Identical Prototype

Remark: The three model name XT2313-3, XT2313-4, XT2313-6 are the same product except model name different for market segment.

## 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	5G NR n77: 3700 MHz ~ 3980 MHz 5G NR n78: 3700 MHz ~ 3800 MHz
Rx Frequency	5G NR n77: 3700 MHz ~ 3980 MHz 5G NR n78: 3700 MHz ~ 3800 MHz
Bandwidth	n77/n78: 20MHz / 30MHz / 40MHz / 50MHz / 60MHz / 70MHz / 80MHz / 90MHz / 100MHz
SCS	30kHz
Antenna Type	PIFA Antenna
Antenna Gain	<Ant. 1>: n77: -2.43 dBi <Ant. 2>: n77: -3.4 dBi <Ant. 5>: n77/n78: -1.2 dBi <Ant. 8>: n77: -3.34 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

Remark:

1. The device supports HPUE mode for 5G NR n77.



2. The device supports n77(1T4R) SRS resources on Ant.1/2/5/8, only the worst test data of Antenna 5 is showed in the report.
3. 5G NR n77/n78 support SA and NSA mode. According to the maximum power between SA and NSA mode, SA covers NSA mode for conducted test items.
4. The EN-DC mode combination could be referred to the product spec.
5. For NSA mode of all EN-DC combination, we only show the combination of the maximum power among all NSA combinations in the report.

### 1.5 Specification of Accessory

Specification of Accessory				
Battery 1	Brand Name	Motorola (ATL)	Model Name	NH50
Battery 2	Brand Name	Motorola (Sunwoda)	Model Name	NH50
USB Cable 1	Brand Name	Motorola (Saibao)	Model Name	SLQ-A212A
USB Cable 2	Brand Name	Motorola (NAIYI)	Model Name	1.1.0196

### 1.6 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.7 Maximum EIRP and Emission Designator

5G NR n77		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
20	3710.01 ~ 3969.99	0.3388	18M2G7D	0.3126	18M2W7D
30	3715.02 ~ 3964.98	0.3499	27M9G7D	0.3126	27M9W7D
40	3720.00 ~ 3960.00	0.3436	37M8G7D	0.3041	37M8W7D
50	3725.01 ~ 3954.99	0.3404	47M5G7D	0.2958	47M5W7D
60	3730.02 ~ 3949.98	0.3334	57M9G7D	0.2999	57M9W7D
70	3735.00 ~ 3945.00	0.3334	67M4G7D	0.3141	67M6W7D
80	3740.01 ~ 3939.99	0.3289	77M4G7D	0.3069	77M5W7D
90	3745.02 ~ 3934.98	0.3342	87M6G7D	0.3062	87M6W7D
100	3750.00 ~ 3930.00	0.3639	97M5G7D	0.2884	97M5W7D



5G NR n78		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
20	3710.01 ~ 3789.99	0.1690	18M2G7D	0.1535	18M2W7D
30	3715.02 ~ 3784.98	0.1718	27M9G7D	0.1629	27M9W7D
40	3720.00 ~ 3780.00	0.1742	37M8G7D	0.1667	37M8W7D
50	3725.01 ~ 3774.99	0.1683	47M5G7D	0.1600	47M5W7D
60	3730.02 ~ 3769.98	0.1694	57M9G7D	0.1570	57M9W7D
70	3735.00 ~ 3765.00	0.1614	67M4G7D	0.1563	67M6W7D
80	3740.01 ~ 3759.99	0.1626	77M4G7D	0.1545	77M5W7D
90	3745.02 ~ 3754.98	0.1600	87M6G7D	0.1538	87M6W7D
100	3750.00	0.1778	97M5G7D	0.1570	97M5W7D

Note:

- 5G NR n77 overlaps the entire frequency range of 5G NR n78. Therefore, the test results provided in this report covers 5G NR n77 as well as 5G NR n78.
- All modulations have been tested, only the worst test results of PSK & QAM are shown in the report.

### 1.8 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

<b>Test Firm</b>	Sporton International Inc. (Kunshan)		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	03CH04-KS	CN1257	314309



Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

<b>Test Firm</b>	Sporton International Inc. (ShenZhen)		
<b>Test Site Location</b>	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	TH01-SZ	CN1256	421272

Test data subcontracted: Conducted test case in section 3 of this report.

### 1.9 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH04-KS	AUDIX	E3	6.2009-8-24a1

### 1.10 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 27
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

**Remark:**

All test items were verified and recorded according to the standards and without any deviation during the test.






## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

Antenna port conducted and radiated test items are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.


For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases were recorded in this report (X Plane).

The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.

Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			

Test Items	5G NR	Bandwidth (MHz)									Modulation					RB #		Test Channel		
		20	30	40	50	60	70	80	90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256 QAM	1	Full	L	M	H
Max. Output Power	n77	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	n78	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	n77	v									v	v				v	v	v	v	v
26dB and 99% Bandwidth	n77	v	v	v	v	v	v	v	v	v	v	v	v	v	v		v		v	
Conducted Band Edge	n77	v				v				v	v	v				v	v	v		v
Conducted Spurious Emission	n77	v				v				v	v	v				v		v	v	v
Frequency Stability	n77	v										v					v		v	
E.I.R.P	n77	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	n78	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Radiated Spurious Emission	n77	Worst Case																v	v	v
	n78	Worst Case																	v	
Note	1. The mark "v" means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. Frequency Stability : Normal Voltage = 3.87V ; Low Voltage =3.6V. ; High Voltage =4.51V																			

## 2.2 Connection Diagram of Test System

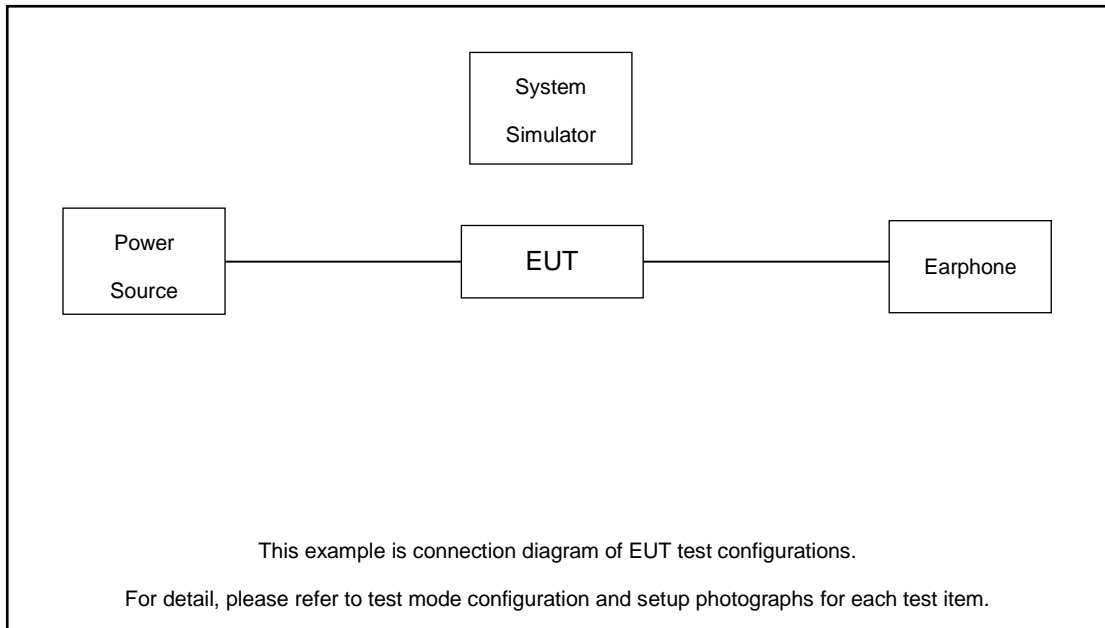

The EUT has been configuration operated in a manner tended to maximize its emission characteristics in a typical application.

## 2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m
4.	Earphone	Lenovo	P121	N/A	Unshielded,1.2m	N/A
5.	AC Adapter	Moto	MC-101	N/A	N/A	N/A



### 2.4 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

$$\text{Offset} = \text{RF cable loss.}$$

Following shows an offset computation example with cable loss 8.7 dB.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 8.7 \text{ (dB)} \end{aligned}$$

### 2.5 Frequency List of Low/Middle/High Channels

5G n77 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	650000	656000	662000
	Frequency	3750	3840	3930
90	Channel	649668	656000	662332
	Frequency	3745.02	3840	3934.98
80	Channel	649334	656000	662666
	Frequency	3740.01	3840	3939.99
70	Channel	649000	656000	663000
	Frequency	3735	3840	3945
60	Channel	648668	656000	663332
	Frequency	3730.02	3840	3949.98
50	Channel	648334	656000	663666
	Frequency	3725.01	3840	3954.99
40	Channel	648000	656000	664000
	Frequency	3720	3840	3960
30	Channel	647668	656000	664332
	Frequency	3715.02	3840	3964.98
20	Channel	647334	656000	664666
	Frequency	3710.01	3840	3969.99



5G n78 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	650000		
	Frequency	3750		
90	Channel	649668	650000	650332
	Frequency	3745.02	3750	3754.98
80	Channel	649334	650000	650666
	Frequency	3740.01	3750	3759.99
70	Channel	649000	650000	651000
	Frequency	3735	3750	3765
60	Channel	648668	650000	651332
	Frequency	3730.02	3750	3769.98
50	Channel	648334	650000	651666
	Frequency	3725.01	3750	3774.99
40	Channel	648000	650000	652000
	Frequency	3720	3750	3780
30	Channel	647668	650000	652332
	Frequency	3715.02	3750	3784.98
20	Channel	647334	650000	652666
	Frequency	3710.01	3750	3789.99

### 3 Conducted Test Items

#### 3.1 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.2 Test Setup


##### 3.2.1 Conducted Output Power



##### 3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission



##### 3.2.3 Frequency Stability

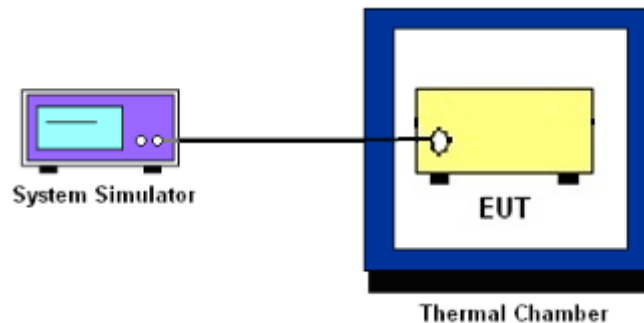

### 3.3 Test Result of Conducted Test

Please refer to Appendix A.



### 3.4 Conducted Output Power and EIRP

#### 3.4.1 Description of the Conducted Output Power Measurement and EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The EIRP of mobile transmitters must not exceed 1 Watts for 5G NR n77, n78.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$ ,  $ERP = EIRP - 2.15$ , where

$P_T$  = transmitter output power in dBm

$G_T$  = gain of the transmitting antenna in dBi

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna in dB

#### 3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.



## **3.5 Peak-to-Average Ratio**

### **3.5.1 Description of the PAR Measurement**

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### **3.5.2 Test Procedures**

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.



## 3.6 Occupied Bandwidth

### 3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

### 3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.  
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.





### 3.7 Conducted Band Edge

#### 3.7.1 Description of Conducted Band Edge Measurement

27.53(l)(2)

For mobile operations in the 3700-3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz. Compliance with this paragraph is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be either one percent of the emission bandwidth of the fundamental emission of the transmitter or 350 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.

#### 3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW  $\geq$  1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used or a narrower RBW was used (generally limited to no less than 1% of the OBW) and the measured power was integrated over the full required measurement bandwidth.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

$$\begin{aligned} & \text{The limit line is derived from } 43 + 10\log(P)\text{dB below the transmitter power } P(\text{Watts}) \\ & = P(\text{W}) - [43 + 10\log(P)] \text{ (dB)} \\ & = [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} = -13\text{dBm}. \end{aligned}$$

9. When using the integration method, the starting frequency of the integration shall be centered at one-half of the RBW away from the band edge.



### 3.8 Conducted Spurious Emission

#### 3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.

#### 3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)  
= P(W)- [43 + 10log(P)] (dB)  
= [30 + 10log(P)] (dBm) - [43 + 10log(P)] (dB)  
= -13dBm.



## 3.9 Frequency Stability

### 3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

### 3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

### 3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at 20±5°C and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


## 4 Radiated Test Items

### 4.1 Measuring Instruments


See list of measuring instruments of this test report.

### 4.2 Test Setup


#### 4.2.1 For radiated test below 30MHz

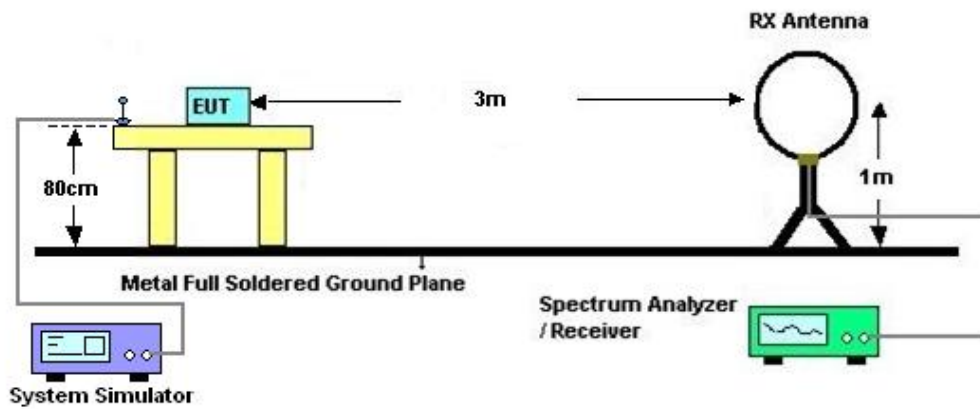

#### 4.2.2 For radiated test from 30MHz to 1GHz

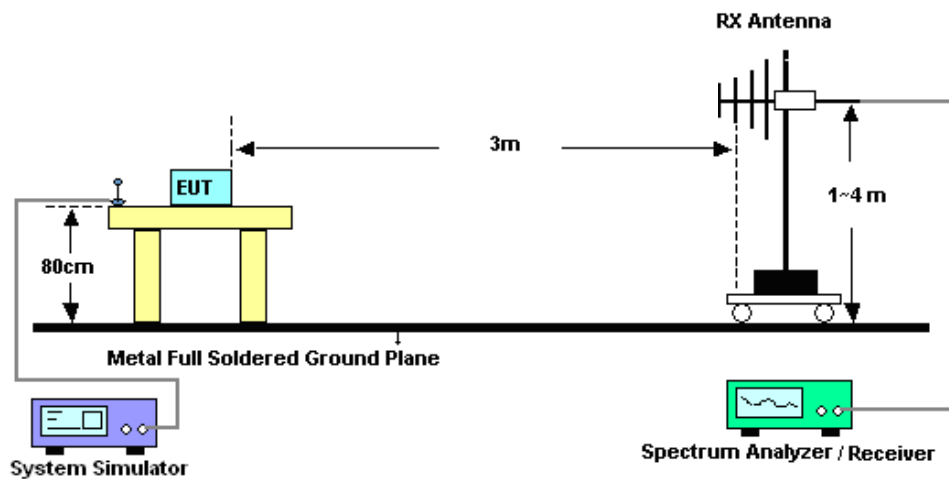

#### 4.2.3 For radiated test above 1GHz

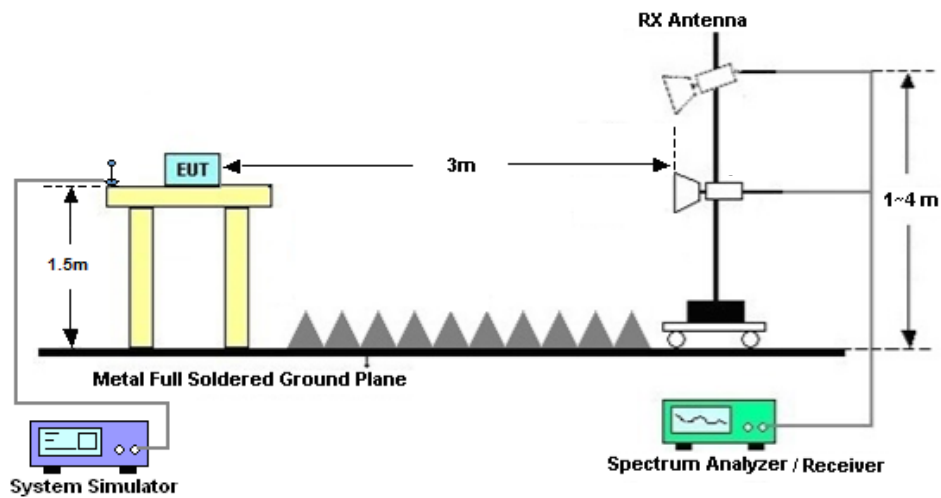

#### 4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.



## 4.4 Radiated Spurious Emission

### 4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

### 4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10.  $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11.  $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$   
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$   
 $= -13\text{dBm}.$



## 5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec. 27, 2021	Dec. 01, 2022~Dec. 12, 2022	Dec. 26, 2022	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-04 265	60.06.020.007 7	0.4GHz~26.5GHz	Dec. 25, 2021	Dec. 01, 2022~Dec. 12, 2022	Dec. 24, 2022	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Jul. 07, 2022	Dec. 01, 2022~Dec. 12, 2022	Jul. 06, 2023	Conducted (TH01-SZ)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471079	10Hz-44G,MAX 30dB	Oct. 12, 2022	Dec. 23, 2022	Oct. 11, 2023	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 29, 2022	Dec. 23, 2022	Oct. 28, 2023	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz-1GHz	May 24, 2022	Dec. 23, 2022	May 23, 2023	Radiation (03CH04-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	1284	1GHz~18GHz	Jan. 05, 2022	Dec. 23, 2022	Jan. 04, 2023	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2022	Dec. 23, 2022	Jan. 04, 2023	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	Jan. 05, 2022	Dec. 23, 2022	Jan. 04, 2023	Radiation (03CH04-KS)
Amplifier	MITEQ	EM18G40G GA	060728	18~40GHz	Jan. 05, 2022	Dec. 23, 2022	Jan. 04, 2023	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18G A	060840	1Ghz-18Ghz	Oct. 12, 2022	Dec. 23, 2022	Oct. 11, 2023	Radiation (03CH04-KS)
Amplifier	Agilent	8449B	3008A02370	1Ghz-18Ghz	Oct. 12, 2022	Dec. 23, 2022	Oct. 11, 2023	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Dec. 23, 2022	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Dec. 23, 2022	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Dec. 23, 2022	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required



## 6 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±1.34 dB
Conducted Emissions	±1.34 dB
Occupied Channel Bandwidth	±0.12 %

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.3dB
---------------------------------------------------------------------	-------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8dB
---------------------------------------------------------------------	-------

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8dB
---------------------------------------------------------------------	-------

----- THE END -----





## Appendix A. Test Results of Conducted Test

Test Engineer :	Jung Kuo	Temperature :	22~23°C
		Relative Humidity :	40~42%

# FR1 N77

## Transmitter Conducted Output Power And EIRP, (G<sub>T</sub> - L<sub>C</sub>)=-1.2dB

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
77	30	20	647334	3710.01	DFT-s-OFDM QPSK	1@1	26.5	25.3	0.3388
77	30	20	647334	3710.01	DFT-s-OFDM 16 QAM	1@1	25.87	24.67	0.2931
77	30	20	656000	3840	DFT-s-OFDM QPSK	1@1	26.43	25.23	0.3334
77	30	20	656000	3840	DFT-s-OFDM 16 QAM	1@1	25.57	24.37	0.2735
77	30	20	664666	3969.99	DFT-s-OFDM QPSK	1@1	26.46	25.26	0.3357
77	30	20	664666	3969.99	DFT-s-OFDM 16 QAM	1@1	26.15	24.95	0.3126
77	30	30	647668	3715.02	DFT-s-OFDM QPSK	1@1	26.64	25.44	0.3499
77	30	30	647668	3715.02	DFT-s-OFDM 16 QAM	1@1	25.87	24.67	0.2931
77	30	30	656000	3840.0	DFT-s-OFDM QPSK	1@1	26.43	25.23	0.3334
77	30	30	656000	3840.0	DFT-s-OFDM 16 QAM	1@1	25.57	24.37	0.2735
77	30	30	664332	3964.98	DFT-s-OFDM QPSK	1@1	26.46	25.26	0.3357
77	30	30	664332	3964.98	DFT-s-OFDM 16 QAM	1@1	26.15	24.95	0.3126
77	30	40	648000	3720.0	DFT-s-OFDM QPSK	1@1	26.56	25.36	0.3436
77	30	40	648000	3720.0	DFT-s-OFDM 16 QAM	1@1	25.74	24.54	0.2844
77	30	40	656000	3840.0	DFT-s-OFDM QPSK	1@1	26.5	25.3	0.3388
77	30	40	656000	3840.0	DFT-s-OFDM 16 QAM	1@1	25.65	24.45	0.2786
77	30	40	664000	3960.0	DFT-s-OFDM QPSK	1@1	26.44	25.24	0.3342
77	30	40	664000	3960.0	DFT-s-OFDM 16 QAM	1@1	26.03	24.83	0.3041
77	30	50	648334	3725.01	DFT-s-OFDM QPSK	1@1	26.52	25.32	0.3404
77	30	50	648334	3725.01	DFT-s-OFDM 16 QAM	1@1	25.83	24.63	0.2904
77	30	50	656000	3840.0	DFT-s-OFDM QPSK	1@1	26.49	25.29	0.3381
77	30	50	656000	3840.0	DFT-s-OFDM 16 QAM	1@1	25.78	24.58	0.2871

77	30	50	663666	3954.99	DFT-s-OFDM QPSK	1@1	26.13	24.93	0.3112
77	30	50	663666	3954.99	DFT-s-OFDM 16 QAM	1@1	25.91	24.71	0.2958
77	30	60	648668	3730.02	DFT-s-OFDM QPSK	1@1	26.37	25.17	0.3289
77	30	60	648668	3730.02	DFT-s-OFDM 16 QAM	1@1	25.97	24.77	0.2999
77	30	60	656000	3840.0	DFT-s-OFDM QPSK	1@1	26.43	25.23	0.3334
77	30	60	656000	3840.0	DFT-s-OFDM 16 QAM	1@1	25.97	24.77	0.2999
77	30	60	663332	3949.98	DFT-s-OFDM QPSK	1@1	25	23.8	0.2399
77	30	60	663332	3949.98	DFT-s-OFDM 16 QAM	1@1	24.19	22.99	0.1991
77	30	70	649000	3735.0	DFT-s-OFDM QPSK	1@1	26.33	25.13	0.3258
77	30	70	649000	3735.0	DFT-s-OFDM 16 QAM	1@1	26.17	24.97	0.3141
77	30	70	656000	3840.0	DFT-s-OFDM QPSK	1@1	26.43	25.23	0.3334
77	30	70	656000	3840.0	DFT-s-OFDM 16 QAM	1@1	25.96	24.76	0.2992
77	30	70	663000	3945.0	DFT-s-OFDM QPSK	1@1	25.4	24.2	0.2630
77	30	70	663000	3945.0	DFT-s-OFDM 16 QAM	1@1	24.61	23.41	0.2193
77	30	80	649334	3740.01	DFT-s-OFDM QPSK	1@1	26.26	25.06	0.3206
77	30	80	649334	3740.01	DFT-s-OFDM 16 QAM	1@1	25.97	24.77	0.2999
77	30	80	656000	3840.0	DFT-s-OFDM QPSK	1@1	26.37	25.17	0.3289
77	30	80	656000	3840.0	DFT-s-OFDM 16 QAM	1@1	26.07	24.87	0.3069
77	30	80	662666	3939.99	DFT-s-OFDM QPSK	1@1	25.55	24.35	0.2723
77	30	80	662666	3939.99	DFT-s-OFDM 16 QAM	1@1	24.77	23.57	0.2275
77	30	90	649668	3745.02	DFT-s-OFDM QPSK	1@1	26.44	25.24	0.3342
77	30	90	649668	3745.02	DFT-s-OFDM 16 QAM	1@1	26.06	24.86	0.3062
77	30	90	656000	3840.0	DFT-s-OFDM QPSK	1@1	26.31	25.11	0.3243
77	30	90	656000	3840.0	DFT-s-OFDM 16 QAM	1@1	26.04	24.84	0.3048
77	30	90	662332	3934.98	DFT-s-OFDM QPSK	1@1	25.49	24.29	0.2685
77	30	90	662332	3934.98	DFT-s-OFDM 16 QAM	1@1	24.69	23.49	0.2234
77	30	100	650000	3750.0	DFT-s-OFDM PI/2 BPSK	135@67	26.43	25.23	0.3334

77	30	100	650000	3750.0	DFT-s-OFDM PI/2 BPSK	1@1	26.26	25.06	0.3206
77	30	100	650000	3750.0	DFT-s-OFDM PI/2 BPSK	1@271	26.81	25.61	0.3639
77	30	100	650000	3750.0	DFT-s-OFDM QPSK	135@67	26.21	25.01	0.3170
77	30	100	650000	3750.0	DFT-s-OFDM QPSK	1@1	26.29	25.09	0.3228
77	30	100	650000	3750.0	DFT-s-OFDM QPSK	1@271	26.11	24.91	0.3097
77	30	100	650000	3750.0	DFT-s-OFDM 16 QAM	135@67	25.22	24.02	0.2523
77	30	100	650000	3750.0	DFT-s-OFDM 16 QAM	1@1	25.8	24.6	0.2884
77	30	100	650000	3750.0	DFT-s-OFDM 16 QAM	1@271	25.29	24.09	0.2564
77	30	100	650000	3750.0	DFT-s-OFDM 64 QAM	135@67	23.72	22.52	0.1786
77	30	100	650000	3750.0	DFT-s-OFDM 64 QAM	1@1	23.87	22.67	0.1849
77	30	100	650000	3750.0	DFT-s-OFDM 64 QAM	1@271	23.37	22.17	0.1648
77	30	100	650000	3750.0	DFT-s-OFDM 256 QAM	135@67	22.22	21.02	0.1265
77	30	100	650000	3750.0	DFT-s-OFDM 256 QAM	1@1	22.39	21.19	0.1315
77	30	100	650000	3750.0	DFT-s-OFDM 256 QAM	1@271	21.87	20.67	0.1167
77	30	100	650000	3750.0	CP-OFDM QPSK	137@68	24.51	23.31	0.2143
77	30	100	650000	3750.0	CP-OFDM QPSK	1@1	24.99	23.79	0.2393
77	30	100	650000	3750.0	CP-OFDM QPSK	1@271	24.2	23	0.1995
77	30	100	656000	3840.0	DFT-s-OFDM PI/2 BPSK	135@67	26.3	25.1	0.3236
77	30	100	656000	3840.0	DFT-s-OFDM PI/2 BPSK	1@1	26.3	25.1	0.3236
77	30	100	656000	3840.0	DFT-s-OFDM PI/2 BPSK	1@271	26.14	24.94	0.3119
77	30	100	656000	3840.0	DFT-s-OFDM QPSK	135@67	26.02	24.82	0.3034
77	30	100	656000	3840.0	DFT-s-OFDM QPSK	1@1	26.32	25.12	0.3251
77	30	100	656000	3840.0	DFT-s-OFDM QPSK	1@271	25.17	23.97	0.2495
77	30	100	656000	3840.0	DFT-s-OFDM 16 QAM	135@67	25.06	23.86	0.2432
77	30	100	656000	3840.0	DFT-s-OFDM 16 QAM	1@1	25.65	24.45	0.2786
77	30	100	656000	3840.0	DFT-s-OFDM 16 QAM	1@271	24.33	23.13	0.2056
77	30	100	656000	3840.0	DFT-s-OFDM 64 QAM	135@67	23.57	22.37	0.1726

77	30	100	656000	3840.0	DFT-s-OFDM 64 QAM	1@1	23.99	22.79	0.1901
77	30	100	656000	3840.0	DFT-s-OFDM 64 QAM	1@271	22.41	21.21	0.1321
77	30	100	656000	3840.0	DFT-s-OFDM 256 QAM	135@67	22.06	20.86	0.1219
77	30	100	656000	3840.0	DFT-s-OFDM 256 QAM	1@1	22.5	21.3	0.1349
77	30	100	656000	3840.0	DFT-s-OFDM 256 QAM	1@271	20.95	19.75	0.0944
77	30	100	656000	3840.0	CP-OFDM QPSK	137@68	24.36	23.16	0.2070
77	30	100	656000	3840.0	CP-OFDM QPSK	1@1	25.09	23.89	0.2449
77	30	100	656000	3840.0	CP-OFDM QPSK	1@271	23.6	22.4	0.1738
77	30	100	662000	3930.0	DFT-s-OFDM PI/2 BPSK	135@67	26.14	24.94	0.3119
77	30	100	662000	3930.0	DFT-s-OFDM PI/2 BPSK	1@1	26.12	24.92	0.3105
77	30	100	662000	3930.0	DFT-s-OFDM PI/2 BPSK	1@271	26.05	24.85	0.3055
77	30	100	662000	3930.0	DFT-s-OFDM QPSK	135@67	25.04	23.84	0.2421
77	30	100	662000	3930.0	DFT-s-OFDM QPSK	1@1	25.28	24.08	0.2559
77	30	100	662000	3930.0	DFT-s-OFDM QPSK	1@271	25.08	23.88	0.2443
77	30	100	662000	3930.0	DFT-s-OFDM 16 QAM	135@67	24.06	22.86	0.1932
77	30	100	662000	3930.0	DFT-s-OFDM 16 QAM	1@1	24.49	23.29	0.2133
77	30	100	662000	3930.0	DFT-s-OFDM 16 QAM	1@271	24.27	23.07	0.2028
77	30	100	662000	3930.0	DFT-s-OFDM 64 QAM	135@67	22.55	21.35	0.1365
77	30	100	662000	3930.0	DFT-s-OFDM 64 QAM	1@1	22.6	21.4	0.1380
77	30	100	662000	3930.0	DFT-s-OFDM 64 QAM	1@271	22.31	21.11	0.1291
77	30	100	662000	3930.0	DFT-s-OFDM 256 QAM	135@67	21.06	19.86	0.0968
77	30	100	662000	3930.0	DFT-s-OFDM 256 QAM	1@1	21.13	19.93	0.0984
77	30	100	662000	3930.0	DFT-s-OFDM 256 QAM	1@271	20.85	19.65	0.0923
77	30	100	662000	3930.0	CP-OFDM QPSK	137@68	23.38	22.18	0.1652
77	30	100	662000	3930.0	CP-OFDM QPSK	1@1	23.75	22.55	0.1799
77	30	100	662000	3930.0	CP-OFDM QPSK	1@271	23.52	22.32	0.1706

## Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0026	PASS	NV
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0024	PASS	LV
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0068	PASS	HV
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0032	PASS	-30°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0054	PASS	-20°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0055	PASS	-10°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0025	PASS	0°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0041	PASS	10°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0026	PASS	20°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0052	PASS	30°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0068	PASS	40°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0057	PASS	50°C

## Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
77	30	20	647334	3710.01	DFT-s-OFDM PI/2 BPSK	50@0	6.83	13	PASS
77	30	20	647334	3710.01	DFT-s-OFDM PI/2 BPSK	1@0	8.63	13	PASS
77	30	20	647334	3710.01	DFT-s-OFDM QPSK	50@0	7.98	13	PASS
77	30	20	647334	3710.01	DFT-s-OFDM QPSK	1@0	7.83	13	PASS
77	30	20	656000	3840.0	DFT-s-OFDM PI/2 BPSK	50@0	6.48	13	PASS
77	30	20	656000	3840.0	DFT-s-OFDM PI/2 BPSK	1@0	8.17	13	PASS
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	7.85	13	PASS
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	1@0	7.54	13	PASS
77	30	20	664666	3969.99	DFT-s-OFDM PI/2 BPSK	50@0	6.54	13	PASS
77	30	20	664666	3969.99	DFT-s-OFDM PI/2 BPSK	1@0	8.46	13	PASS
77	30	20	664666	3969.99	DFT-s-OFDM QPSK	50@0	7.75	13	PASS
77	30	20	664666	3969.99	DFT-s-OFDM QPSK	1@0	7.94	13	PASS


N77(20M)\_DFT-s-OFDM\_PI\_2-BPSK\_Outer\_Full\_Low\_CH




N77(20M)\_DFT-s-OFDM\_PI\_2-BPSK\_Edge\_1RB\_Left\_Low\_CH




N77(20M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_Low\_CH

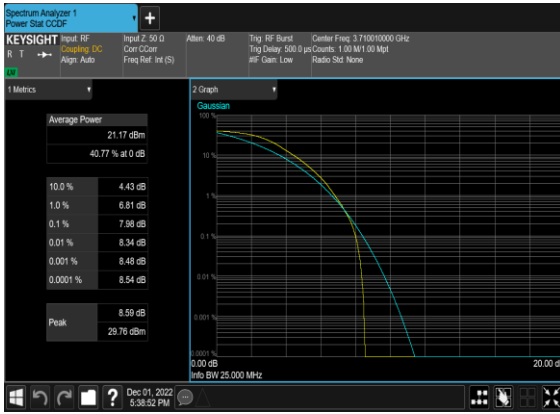


N77(20M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

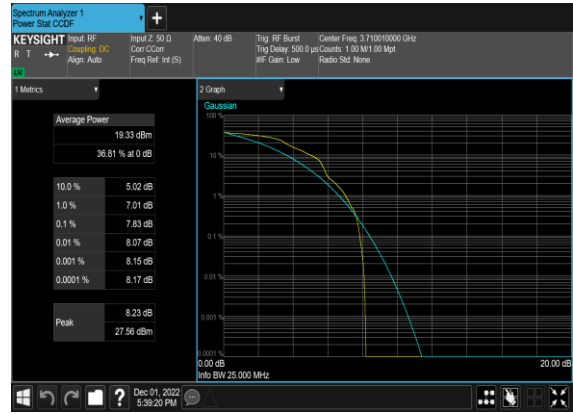

N77(20M)\_DFT-s-OFDM\_PI\_2-BPSK\_Outer\_Full\_Mid\_CH

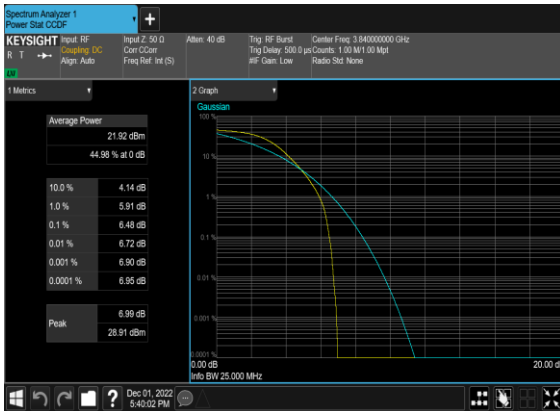

N77(20M)\_DFT-s-OFDM\_PI\_2-BPSK\_Edge\_1RB\_Left\_Mid\_CH

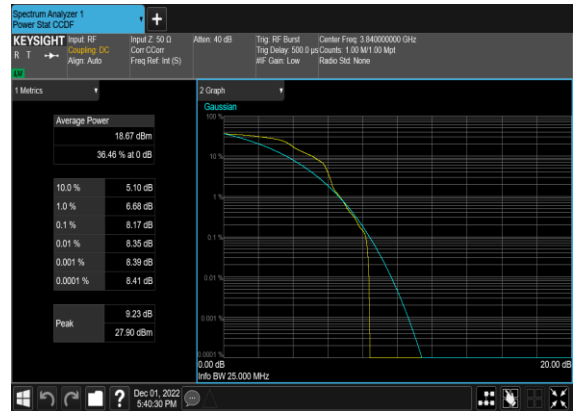




N77(20M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_Mid\_CH




N77(20M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH




N77(20M)\_DFT-s-OFDM\_PI\_2-BPSK\_Outer\_Full\_High\_CH

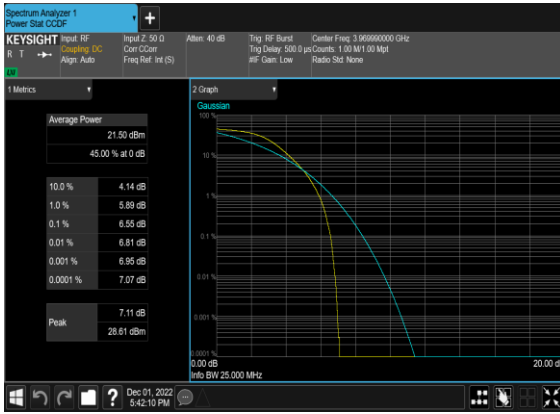


N77(20M)\_DFT-s-OFDM\_PI\_2-BPSK\_Edge\_1RB\_Left\_High\_CH

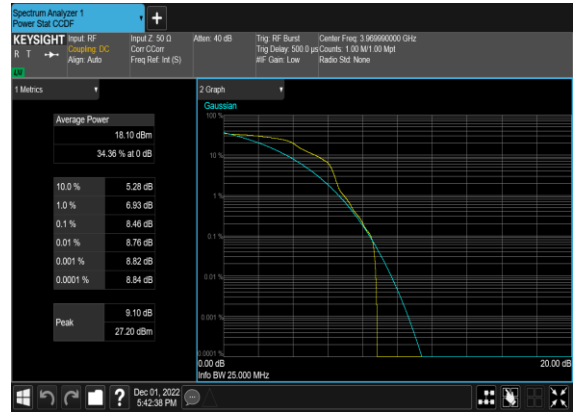

N77(20M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_High\_CH

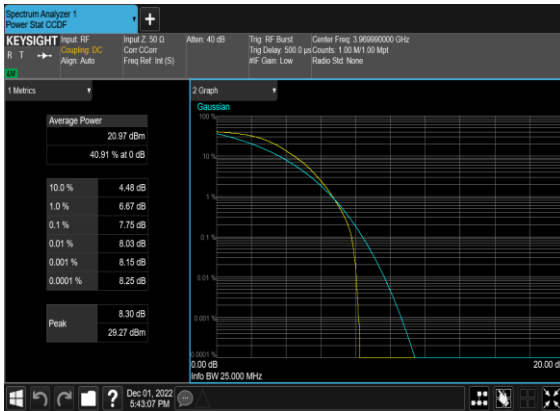

N77(20M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH

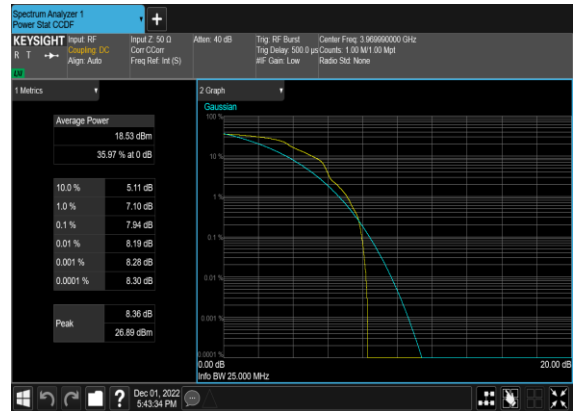


## Occupied Bandwidth

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB OBW (MHz)
77	30	20	656000	3840.0	DFT-s-OFDM PI/2 BPSK	50@0	17.84	19.01
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	17.818	18.85
77	30	20	656000	3840.0	CP-OFDM QPSK	51@0	18.162	19.23
77	30	20	656000	3840.0	CP-OFDM 16 QAM	51@0	18.174	19.21
77	30	20	656000	3840.0	CP-OFDM 64 QAM	51@0	18.134	19.23
77	30	20	656000	3840.0	CP-OFDM 256 QAM	51@0	18.158	19.24
77	30	30	656000	3840.0	DFT-s-OFDM PI/2 BPSK	75@0	26.753	28.06
77	30	30	656000	3840.0	DFT-s-OFDM QPSK	75@0	26.819	28.14
77	30	30	656000	3840.0	CP-OFDM QPSK	78@0	27.858	29.34
77	30	30	656000	3840.0	CP-OFDM 16 QAM	78@0	27.871	29.06
77	30	30	656000	3840.0	CP-OFDM 64 QAM	78@0	27.818	28.98
77	30	30	656000	3840.0	CP-OFDM 256 QAM	78@0	27.855	29.05
77	30	40	656000	3840.0	DFT-s-OFDM PI/2 BPSK	100@0	35.738	37.3
77	30	40	656000	3840.0	DFT-s-OFDM QPSK	100@0	35.72	37.28
77	30	40	656000	3840.0	CP-OFDM QPSK	106@0	37.804	39.35
77	30	40	656000	3840.0	CP-OFDM 16 QAM	106@0	37.784	39.52
77	30	40	656000	3840.0	CP-OFDM 64 QAM	106@0	37.832	39.53
77	30	40	656000	3840.0	CP-OFDM 256 QAM	106@0	37.832	39.53
77	30	50	656000	3840.0	DFT-s-OFDM PI/2 BPSK	128@0	45.833	47.62
77	30	50	656000	3840.0	DFT-s-OFDM QPSK	128@0	45.784	47.51
77	30	50	656000	3840.0	CP-OFDM QPSK	133@0	47.479	49.17
77	30	50	656000	3840.0	CP-OFDM 16 QAM	133@0	47.466	49.3
77	30	50	656000	3840.0	CP-OFDM 64 QAM	133@0	47.442	49.21
77	30	50	656000	3840.0	CP-OFDM 256 QAM	133@0	47.533	49.25
77	30	60	656000	3840.0	DFT-s-OFDM PI/2 BPSK	162@0	57.88	59.83


77	30	60	656000	3840.0	DFT-s-OFDM QPSK	162@0	57.832	60.0
77	30	60	656000	3840.0	CP-OFDM QPSK	162@0	57.754	59.73
77	30	60	656000	3840.0	CP-OFDM 16 QAM	162@0	57.861	59.91
77	30	60	656000	3840.0	CP-OFDM 64 QAM	162@0	57.82	59.74
77	30	60	656000	3840.0	CP-OFDM 256 QAM	162@0	57.772	59.88
77	30	70	656000	3840.0	DFT-s-OFDM PI/2 BPSK	180@0	64.223	66.28
77	30	70	656000	3840.0	DFT-s-OFDM QPSK	180@0	64.314	66.33
77	30	70	656000	3840.0	CP-OFDM QPSK	189@0	67.366	69.79
77	30	70	656000	3840.0	CP-OFDM 16 QAM	189@0	67.473	69.71
77	30	70	656000	3840.0	CP-OFDM 64 QAM	189@0	67.424	69.53
77	30	70	656000	3840.0	CP-OFDM 256 QAM	189@0	67.552	69.51
77	30	80	656000	3840.0	DFT-s-OFDM PI/2 BPSK	216@0	77.221	79.72
77	30	80	656000	3840.0	DFT-s-OFDM QPSK	216@0	77.234	79.73
77	30	80	656000	3840.0	CP-OFDM QPSK	217@0	77.404	80.06
77	30	80	656000	3840.0	CP-OFDM 16 QAM	217@0	77.502	80.08
77	30	80	656000	3840.0	CP-OFDM 64 QAM	217@0	77.45	80.05
77	30	80	656000	3840.0	CP-OFDM 256 QAM	217@0	77.479	79.99
77	30	90	656000	3840.0	DFT-s-OFDM PI/2 BPSK	240@0	85.929	88.52
77	30	90	656000	3840.0	DFT-s-OFDM QPSK	240@0	85.86	88.56
77	30	90	656000	3840.0	CP-OFDM QPSK	245@0	87.607	90.35
77	30	90	656000	3840.0	CP-OFDM 16 QAM	245@0	87.495	90.34
77	30	90	656000	3840.0	CP-OFDM 64 QAM	245@0	87.554	90.31
77	30	90	656000	3840.0	CP-OFDM 256 QAM	245@0	87.42	90.22
77	30	100	656000	3840.0	DFT-s-OFDM PI/2 BPSK	270@0	96.514	99.62
77	30	100	656000	3840.0	DFT-s-OFDM QPSK	270@0	96.319	99.4
77	30	100	656000	3840.0	CP-OFDM QPSK	273@0	97.467	100.5
77	30	100	656000	3840.0	CP-OFDM 16 QAM	273@0	97.372	100.5

77	30	100	656000	3840.0	CP-OFDM 64 QAM	273@0	97.542	100.5
77	30	100	656000	3840.0	CP-OFDM 256 QAM	273@0	97.526	100.7


N77(20M)\_DFT-s-OFDM\_PI\_2-BPSK\_Outer\_Full\_Mid\_CH

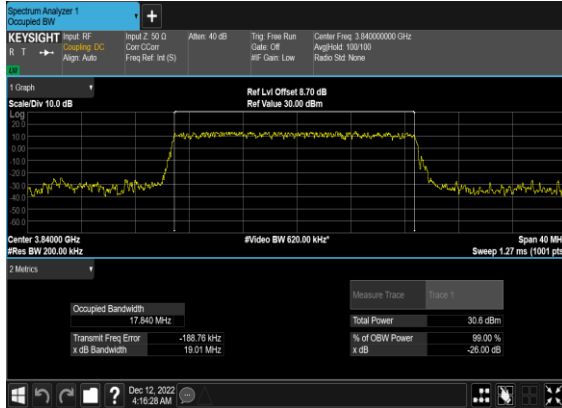


N77(20M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

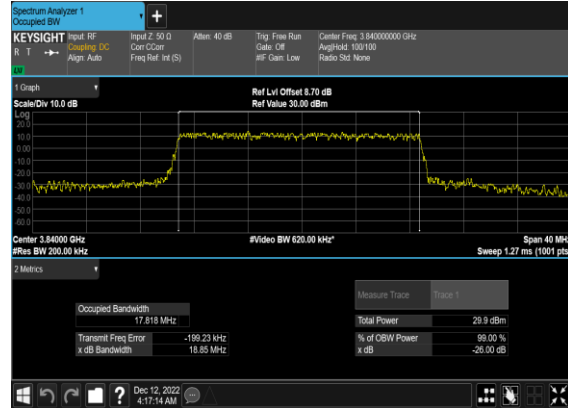


N77(20M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

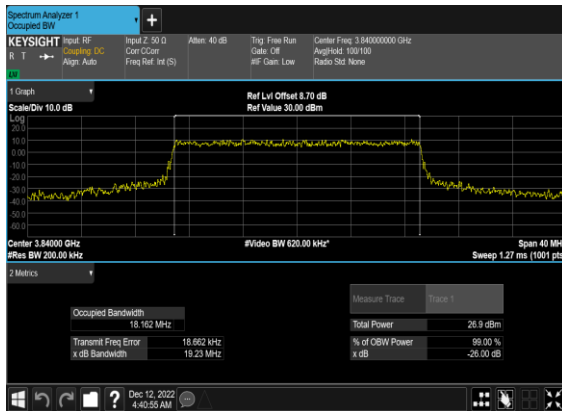


N77(20M)\_CP-OFDM\_16 QAM\_Outer\_Full\_Mid\_CH

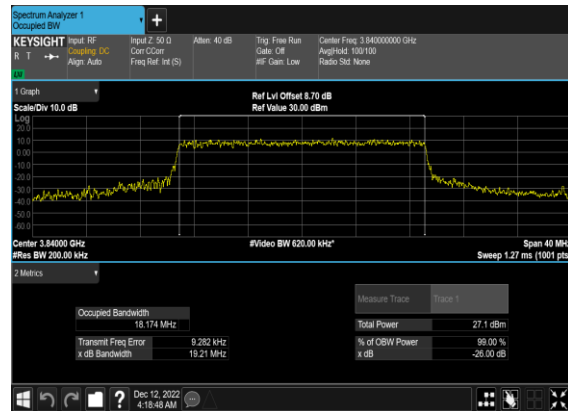


### N77(20M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

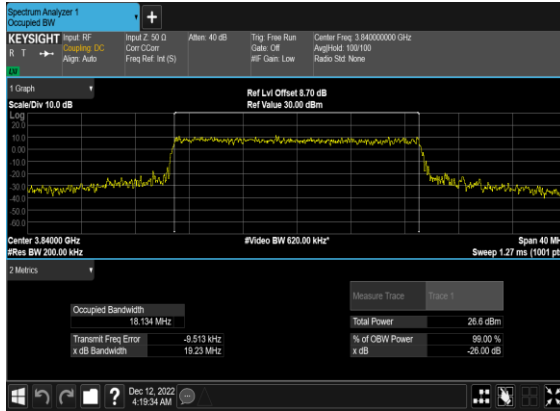


### N77(20M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

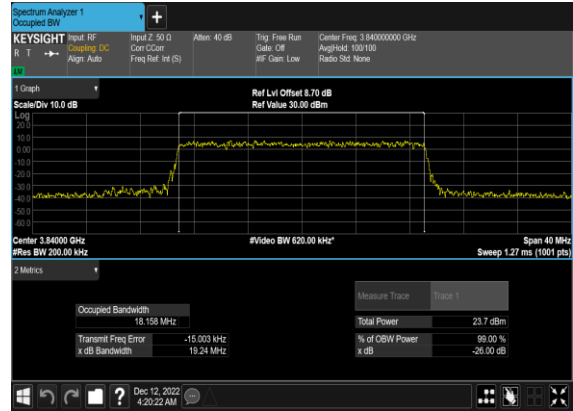


### N77(30M)\_DFT-s-OFDM\_PI\_2- BPSK\_Outer\_Full\_Mid\_CH

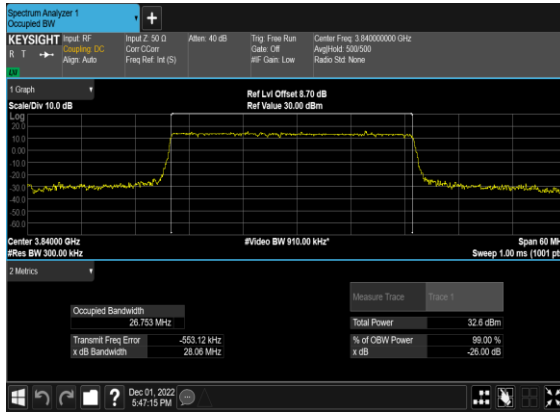


### N77(30M)\_DFT-s- OFDM\_QPSK\_Outer\_Full\_Mid\_CH

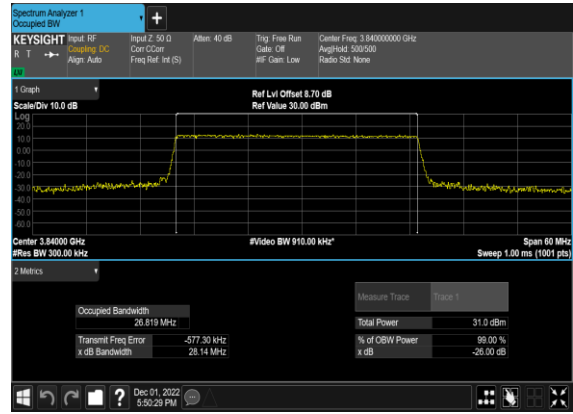


### N77(30M)\_CP- OFDM\_QPSK\_Outer\_Full\_Mid\_CH

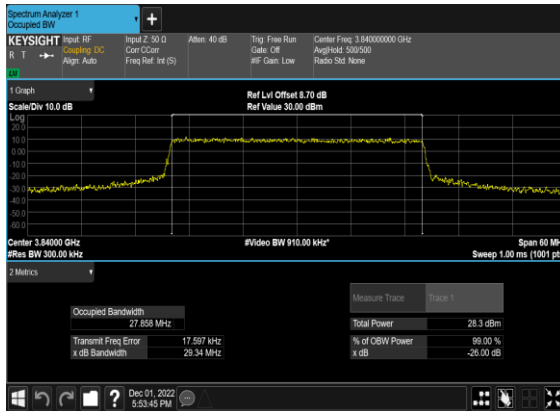


### N77(30M)\_CP-OFDM\_16 QAM\_Outer\_Full\_Mid\_CH

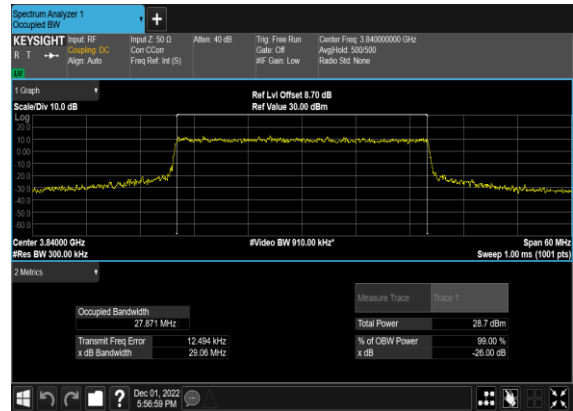


### N77(30M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

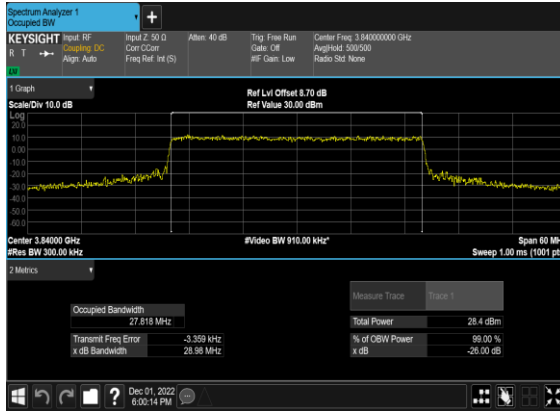


### N77(30M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

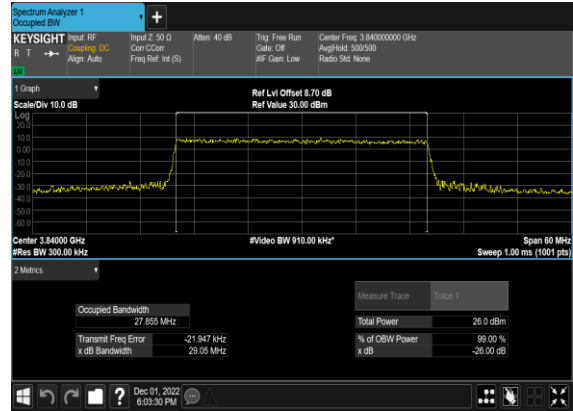


### N77(40M)\_DFT-s-OFDM\_PI\_2- BPSK\_Outer\_Full\_Mid\_CH

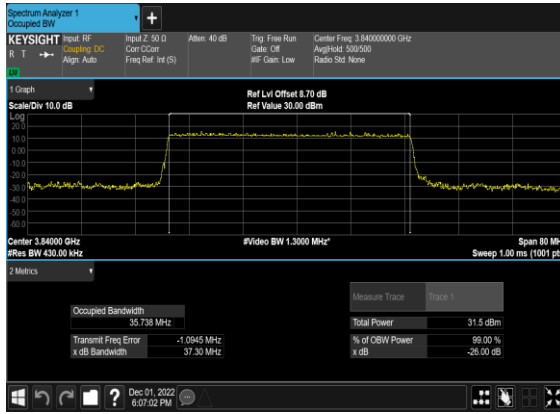


### N77(40M)\_DFT-s- OFDM\_QPSK\_Outer\_Full\_Mid\_CH

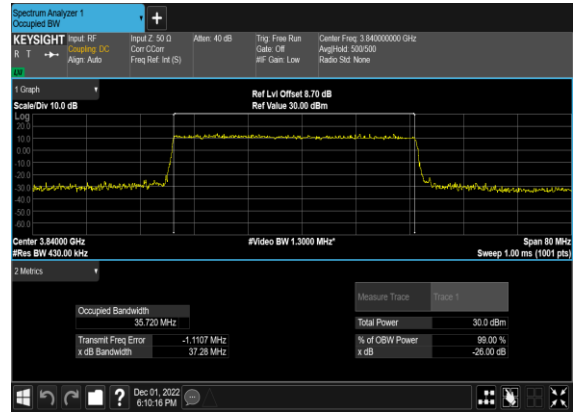


### N77(40M)\_CP- OFDM\_QPSK\_Outer\_Full\_Mid\_CH

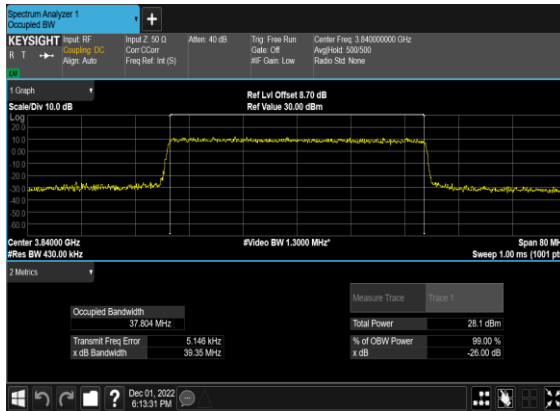


### N77(40M)\_CP-OFDM\_16 QAM\_Outer\_Full\_Mid\_CH

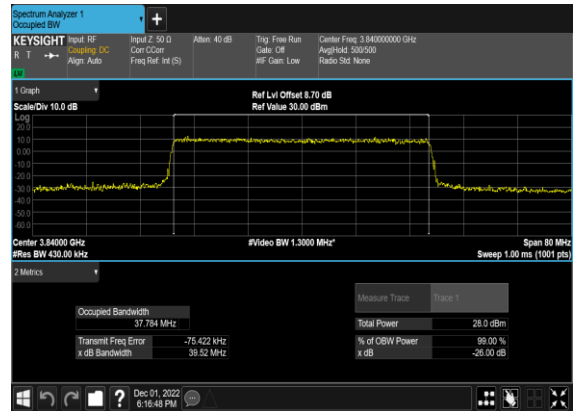


### N77(40M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

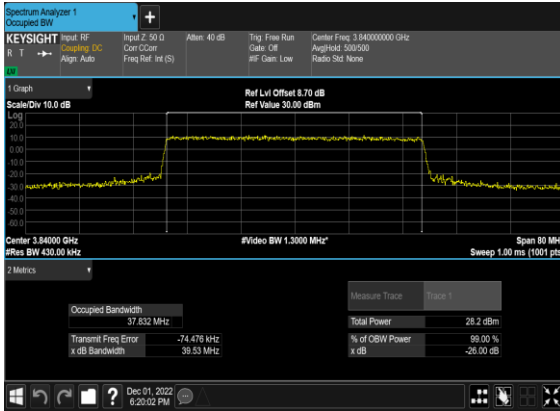


### N77(40M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

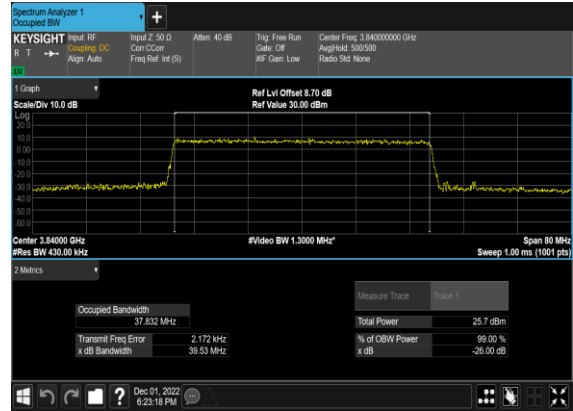


### N77(50M)\_DFT-s-OFDM\_PI\_2- BPSK\_Outer\_Full\_Mid\_CH

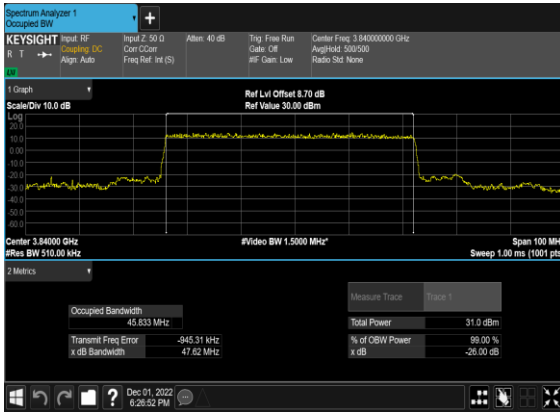


### N77(50M)\_DFT-s- OFDM\_QPSK\_Outer\_Full\_Mid\_CH

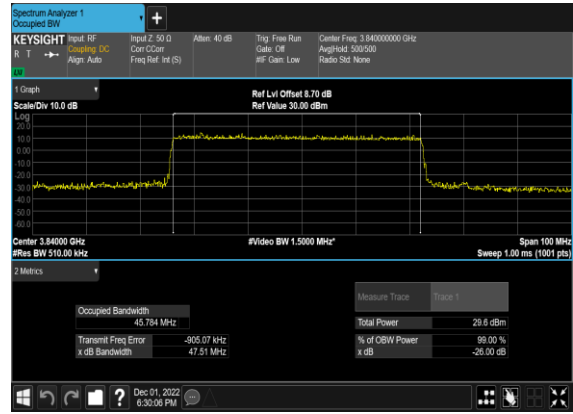


### N77(50M)\_CP- OFDM\_QPSK\_Outer\_Full\_Mid\_CH

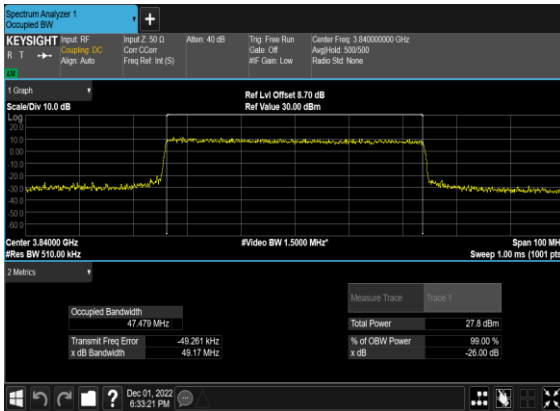


### N77(50M)\_CP-OFDM\_16 QAM\_Outer\_Full\_Mid\_CH

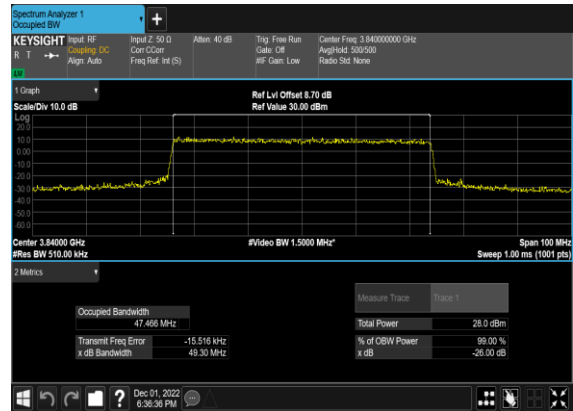


### N77(50M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

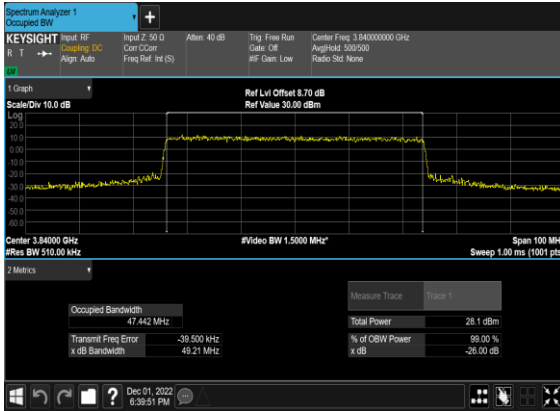


### N77(50M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

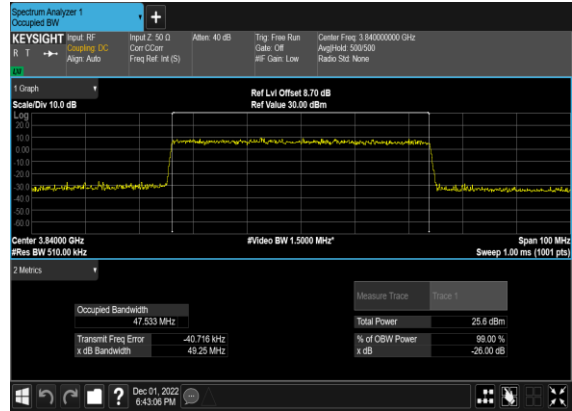


### N77(60M)\_DFT-s-OFDM\_PI\_2- BPSK\_Outer\_Full\_Mid\_CH

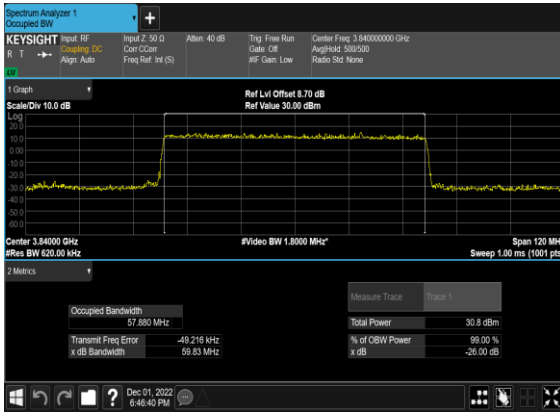


### N77(60M)\_DFT-s- OFDM\_QPSK\_Outer\_Full\_Mid\_CH

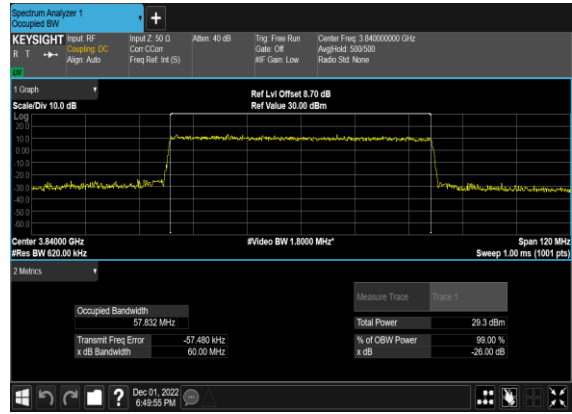

### N77(60M)\_CP- OFDM\_QPSK\_Outer\_Full\_Mid\_CH

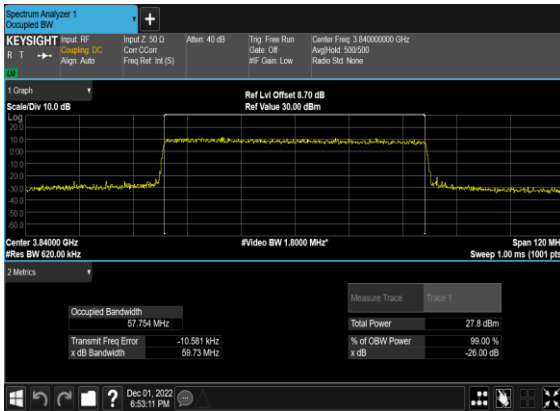


### N77(60M)\_CP-OFDM\_16 QAM\_Outer\_Full\_Mid\_CH

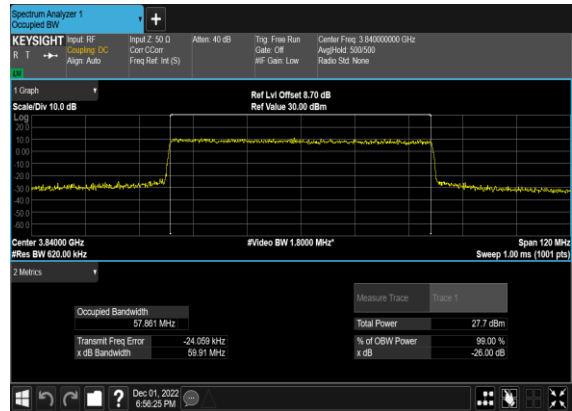





### N77(60M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

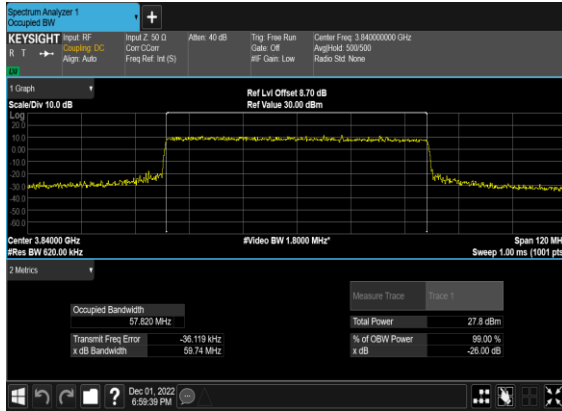


### N77(60M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

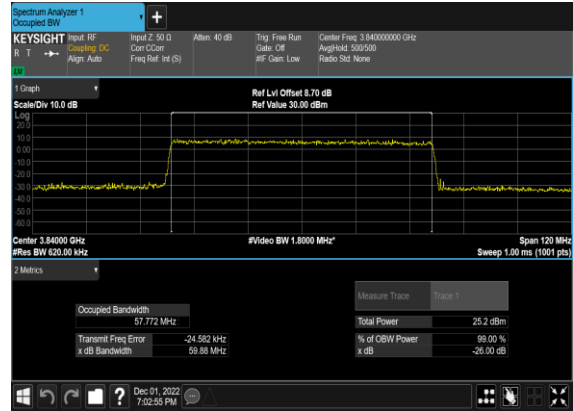


### N77(70M)\_DFT-s-OFDM\_PI\_2- BPSK\_Outer\_Full\_Mid\_CH

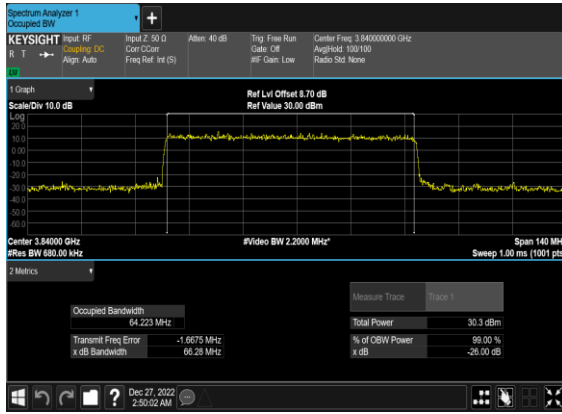


### N77(70M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

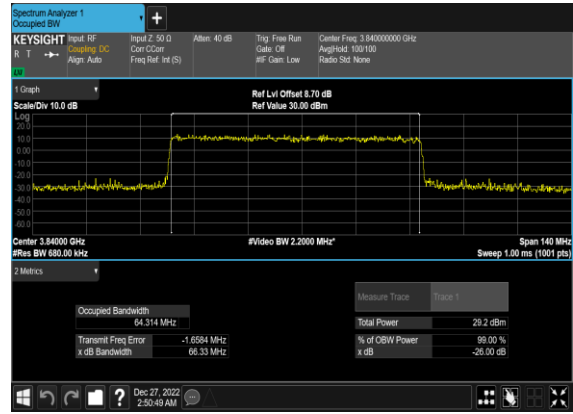


### N77(70M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

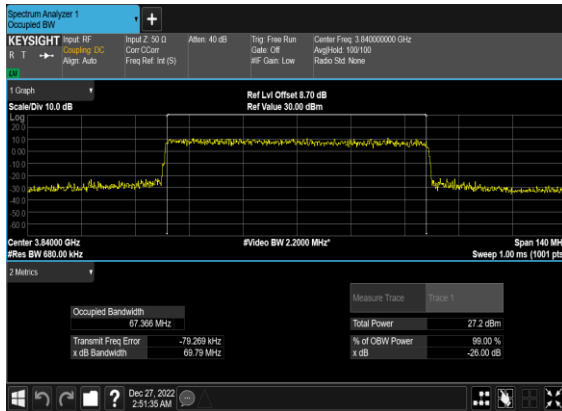


### N77(70M)\_CP-OFDM\_16 QAM\_Outer\_Full\_Mid\_CH

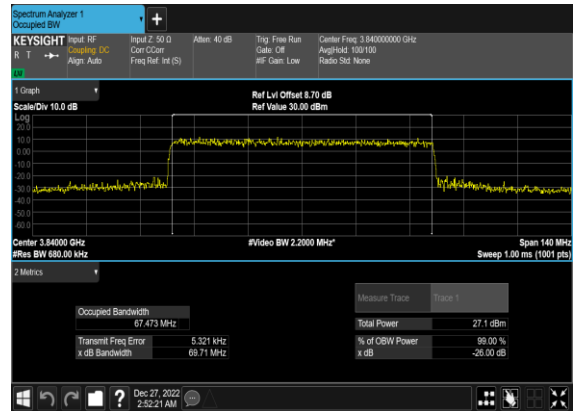


### N77(70M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

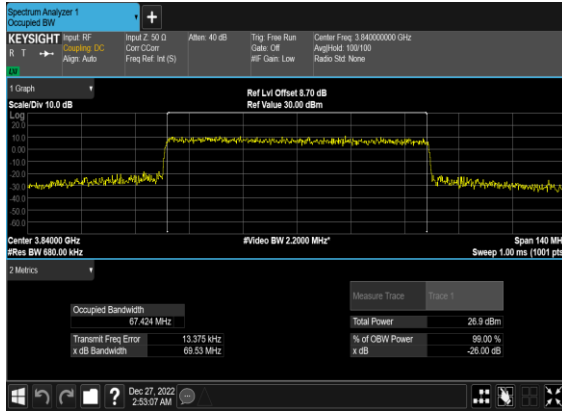


### N77(70M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

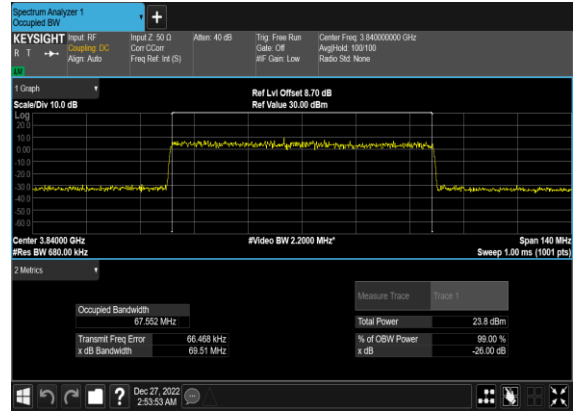


### N77(80M)\_DFT-s-OFDM\_PI\_2- BPSK\_Outer\_Full\_Mid\_CH

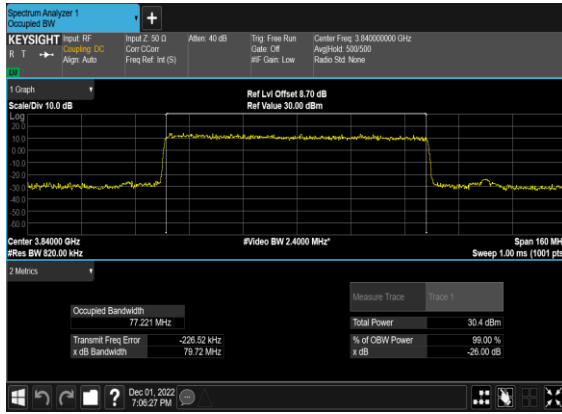


### N77(80M)\_DFT-s- OFDM\_QPSK\_Outer\_Full\_Mid\_CH

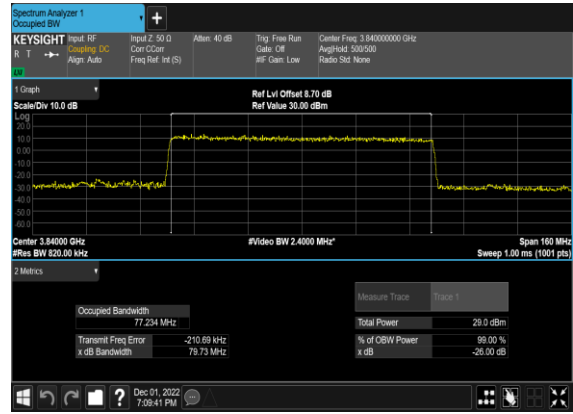


### N77(80M)\_CP- OFDM\_QPSK\_Outer\_Full\_Mid\_CH

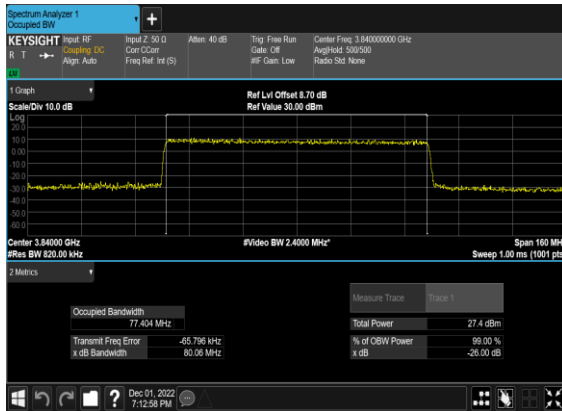


### N77(80M)\_CP-OFDM\_16 QAM\_Outer\_Full\_Mid\_CH

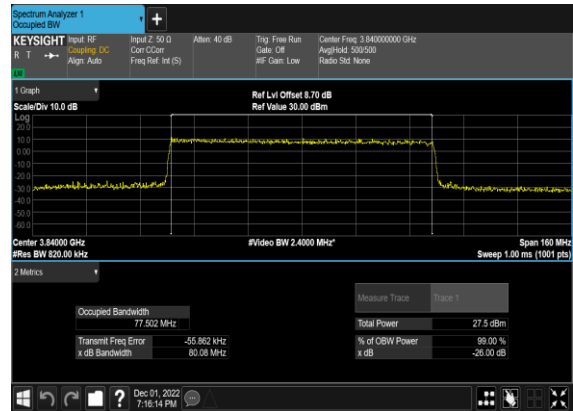


### N77(80M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

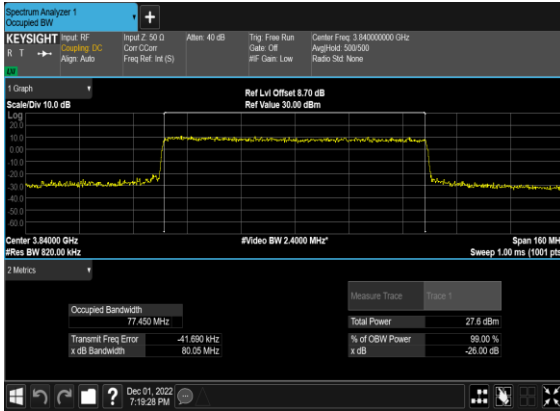


### N77(80M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

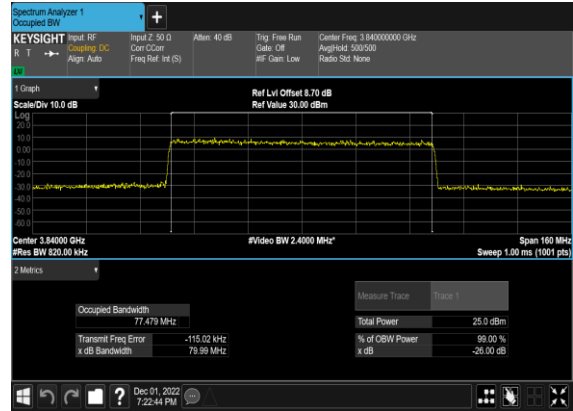


### N77(90M)\_DFT-s-OFDM\_PI\_2- BPSK\_Outer\_Full\_Mid\_CH

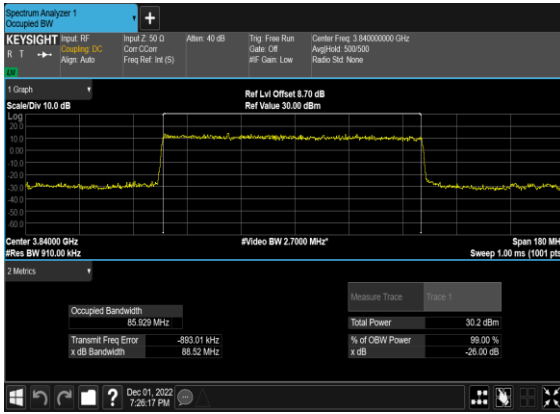


### N77(90M)\_DFT-s- OFDM\_QPSK\_Outer\_Full\_Mid\_CH

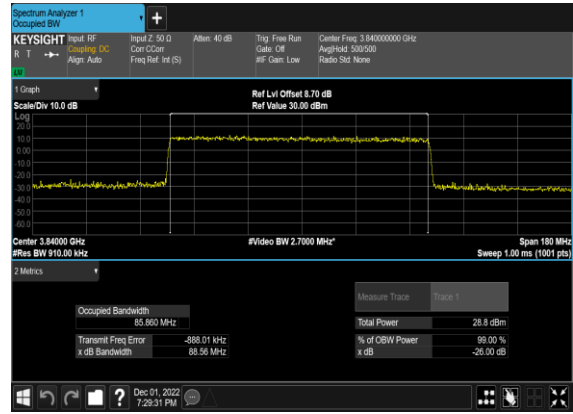


### N77(90M)\_CP- OFDM\_QPSK\_Outer\_Full\_Mid\_CH

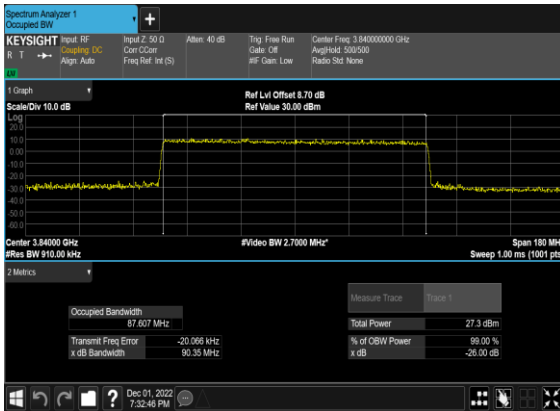


### N77(90M)\_CP-OFDM\_16 QAM\_Outer\_Full\_Mid\_CH

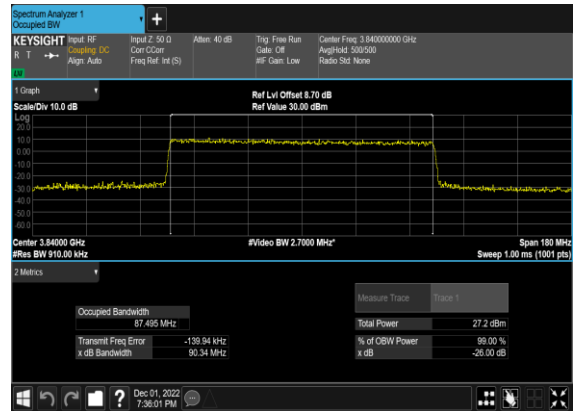


N77(90M)\_CP-OFDM\_64  
QAM\_Outer\_Full\_Mid\_CH

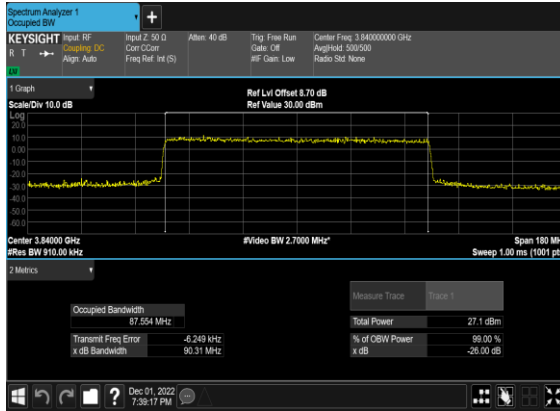


N77(90M)\_CP-OFDM\_256  
QAM\_Outer\_Full\_Mid\_CH

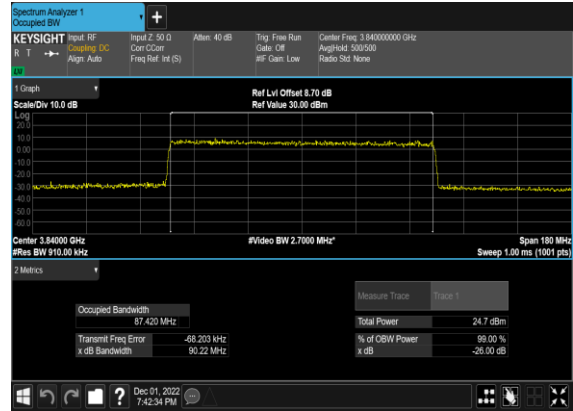


N77(100M)\_DFT-s-OFDM\_PI\_2-  
BPSK\_Outer\_Full\_Mid\_CH

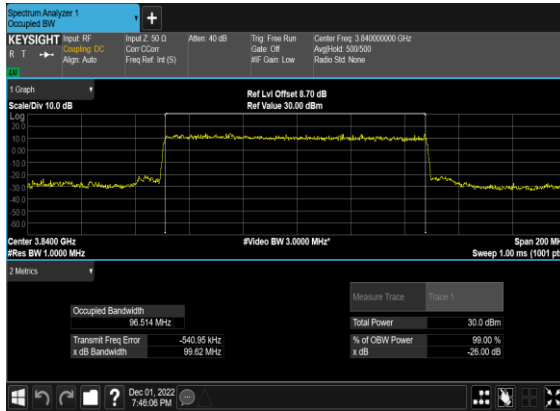


N77(100M)\_DFT-s-  
OFDM\_QPSK\_Outer\_Full\_Mid\_CH

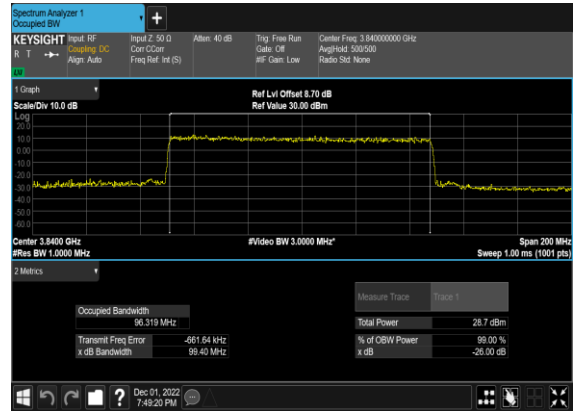


N77(100M)\_CP-  
OFDM\_QPSK\_Outer\_Full\_Mid\_CH

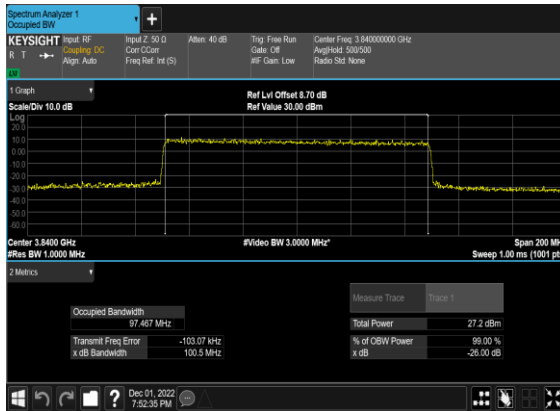


N77(100M)\_CP-OFDM\_16  
QAM\_Outer\_Full\_Mid\_CH

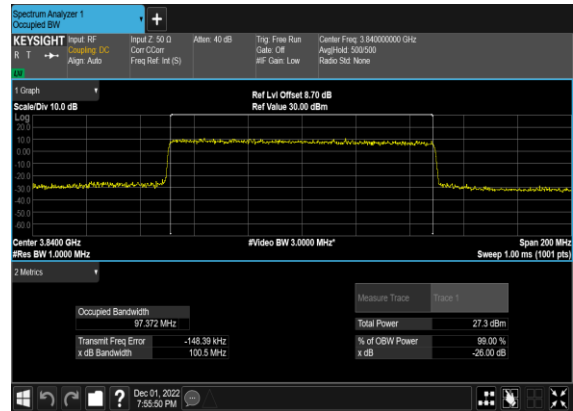

# N77(100M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

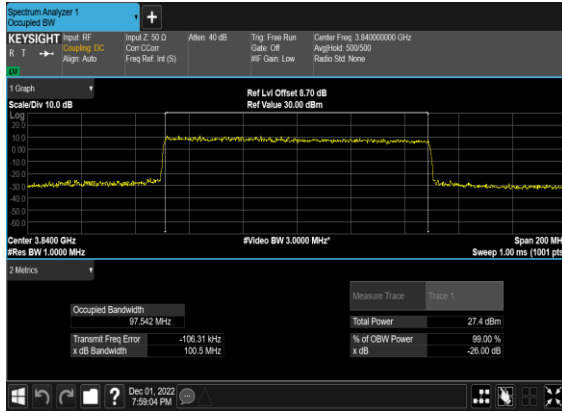

# N77(100M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

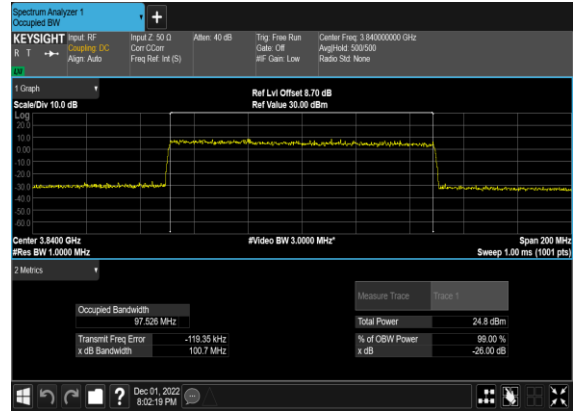

## Conducted Spurious Emissions


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
77	30	20	647334	3710.01	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	20	647334	3710.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	20	647334	3710.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	20	647334	3710.01	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	20	647334	3710.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	20	647334	3710.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	20	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	20	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	20	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	20	664666	3969.99	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	20	664666	3969.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	20	664666	3969.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	20	664666	3969.99	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	20	664666	3969.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	20	664666	3969.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	60	648668	3730.02	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	60	648668	3730.02	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	60	648668	3730.02	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	60	648668	3730.02	DFT-s-OFDM QPSK	1@0	see graph	---

77	30	60	648668	3730.02	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	60	648668	3730.02	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	60	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	60	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	60	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	60	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	60	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	60	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	60	663332	3949.98	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	60	663332	3949.98	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	60	663332	3949.98	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	60	663332	3949.98	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	60	663332	3949.98	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	60	663332	3949.98	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	100	650000	3750.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	100	650000	3750.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	100	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	---


77	30	100	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	<b>PASS</b>
77	30	100	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	<b>PASS</b>
77	30	100	662000	3930.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	100	662000	3930.0	DFT-s-OFDM BPSK	1@0	see graph	<b>PASS</b>
77	30	100	662000	3930.0	DFT-s-OFDM BPSK	1@0	see graph	<b>PASS</b>
77	30	100	662000	3930.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	100	662000	3930.0	DFT-s-OFDM QPSK	1@0	see graph	<b>PASS</b>
77	30	100	662000	3930.0	DFT-s-OFDM QPSK	1@0	see graph	<b>PASS</b>



N77(20M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

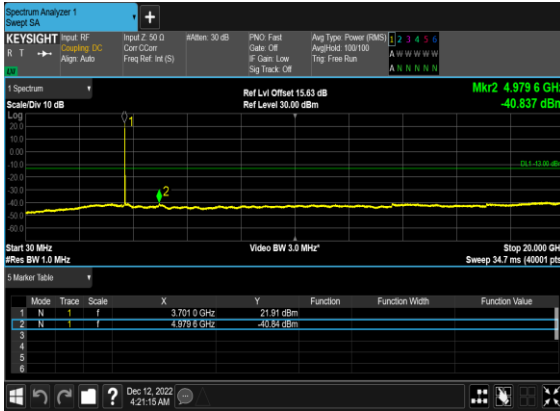


N77(20M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

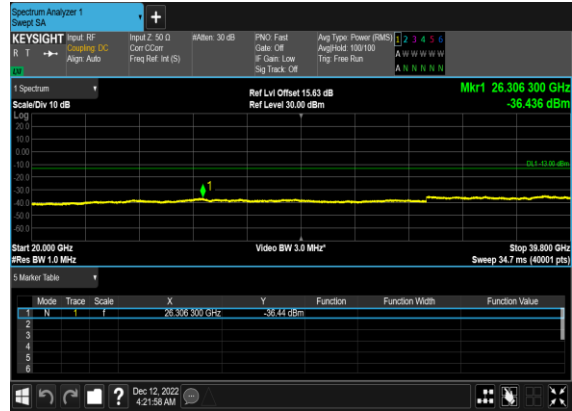

N77(20M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH




N77(20M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

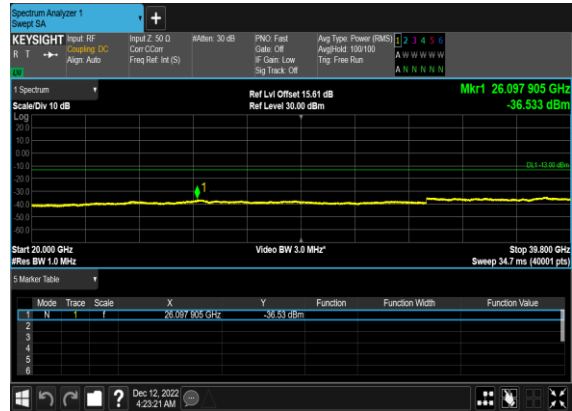

N77(20M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH




N77(20M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

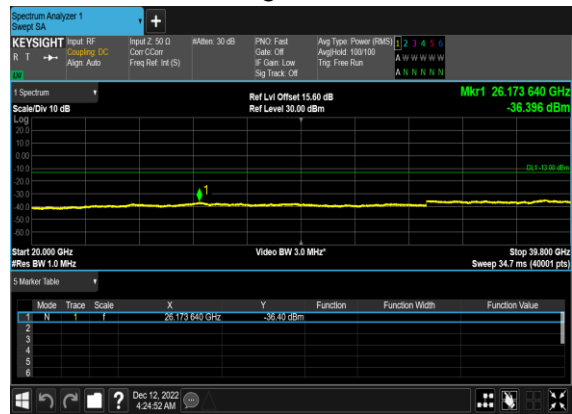

N77(20M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH




N77(20M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

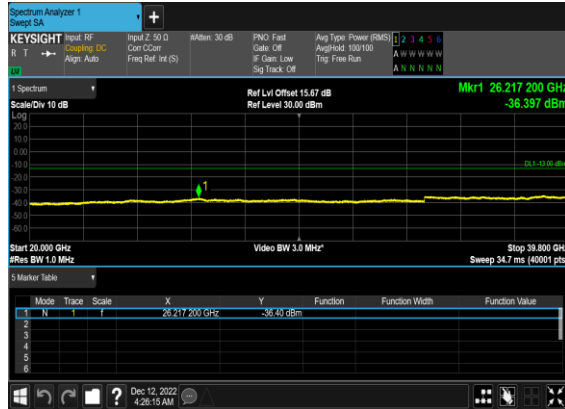


N77(20M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_High\_CH




N77(20M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_High\_CH

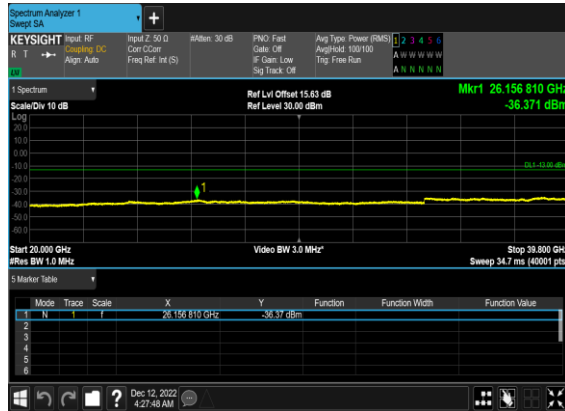

N77(20M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH

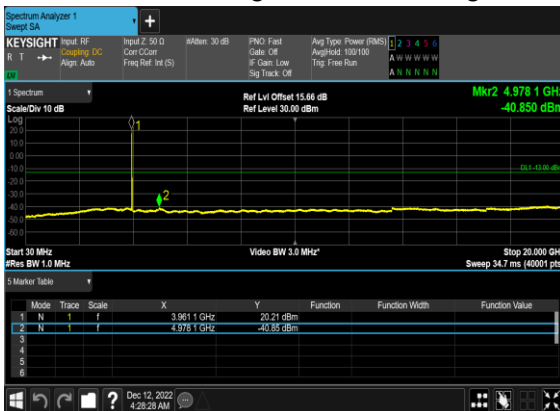


N77(20M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH

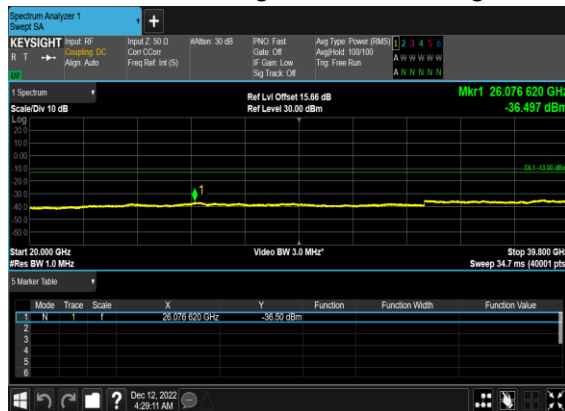

N77(60M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH



N77(60M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

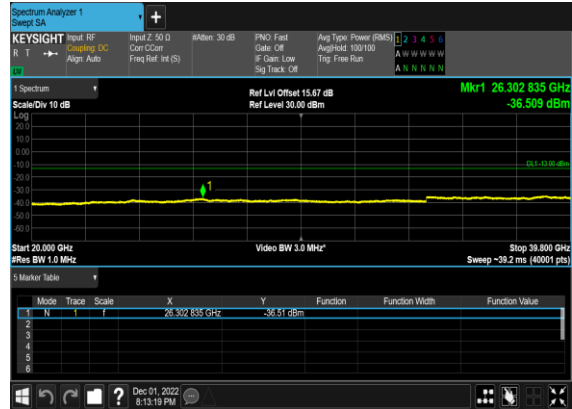


N77(60M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH




N77(60M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH




N77(60M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

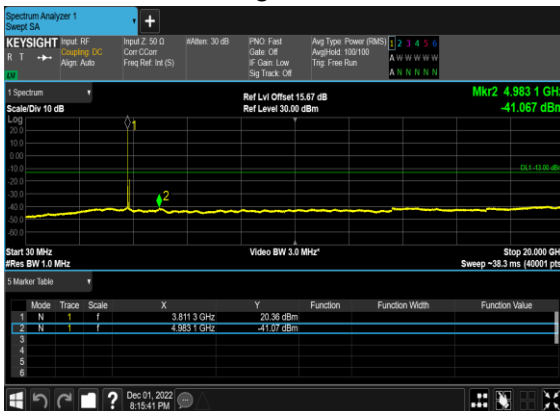

N77(60M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

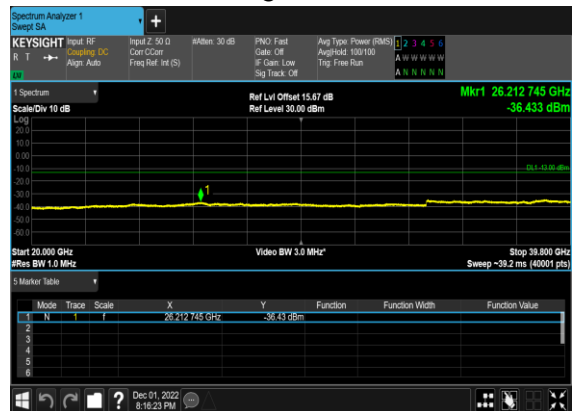


### N77(60M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

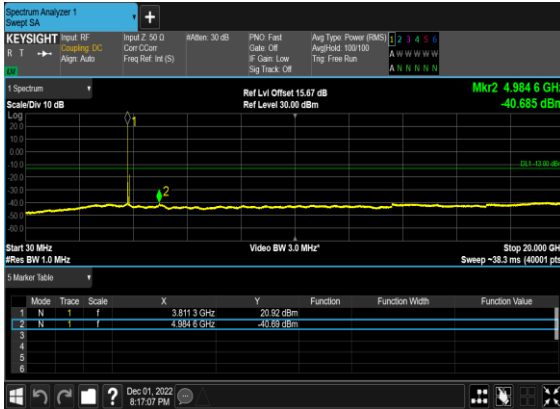


### N77(60M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH




### N77(60M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_High\_CH

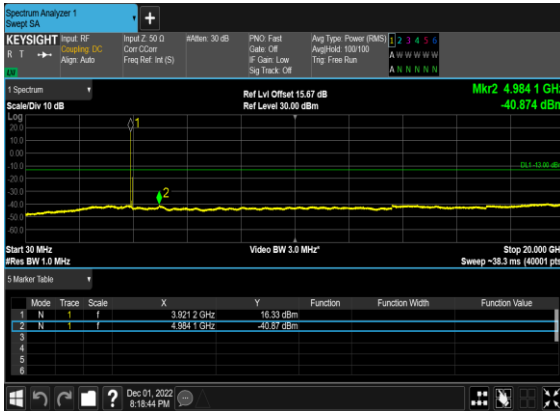

### N77(60M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_High\_CH

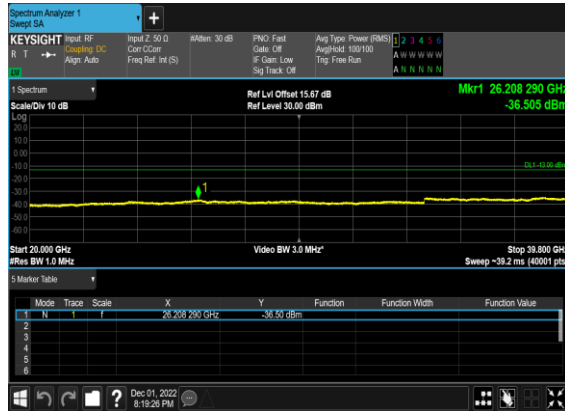

### N77(60M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH

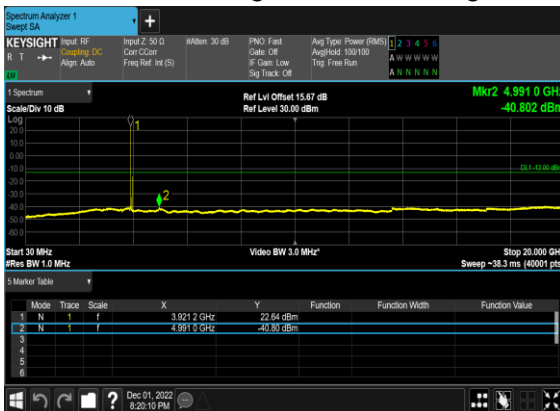

### N77(60M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH

