



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2335-4, XT2335-5, XT2335-6
FCC ID : IHDT56AJ9
STANDARD : 47 CFR Part 2, 27(O)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S) : Dec. 21, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY..... 3
SUMMARY OF TEST RESULT 4
1 GENERAL DESCRIPTION 5
1.1 Applicant 5
1.2 Manufacturer 5
1.3 Product Feature of Equipment Under Test 5
1.4 Product Specification of Equipment Under Test 5
1.5 Modification of EUT 6
1.6 Specification of Accessory 6
1.7 Maximum EIRP Power and Emission Designator 7
1.8 Testing Site 8
1.9 Test Software 8
1.10 Applied Standards 8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 9
2.1 Test Mode 9
2.2 Connection Diagram of Test System 10
2.3 Support Unit used in test configuration and system 10
2.4 Measurement Results Explanation Example 10
2.5 Frequency List of Low/Middle/High Channels 11
3 CONDUCTED TEST ITEMS 13
3.1 Measuring Instruments 13
3.2 Test Setup 13
3.3 Test Result of Conducted Test 13
3.4 Conducted Output Power and EIRP 14
3.5 Peak-to-Average Ratio 15
3.6 Occupied Bandwidth 16
3.7 Conducted Band Edge 17
3.8 Conducted Spurious Emission 18
3.9 Frequency Stability 19
4 RADIATED TEST ITEMS 20
4.1 Measuring Instruments 20
4.2 Test Setup 20
4.3 Test Result of Radiated Test 21
4.4 Radiated Spurious Emission 22
5 LIST OF MEASURING EQUIPMENT 23
6 UNCERTAINTY OF EVALUATION 24
APPENDIX A. TEST RESULTS OF CONDUCTED TEST
APPENDIX B. TEST RESULTS OF RADIATED TEST
APPENDIX C. TEST SETUP PHOTOGRAPHS

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§27.50(j)(3)	Equivalent Isotropic Radiated Power (5G NR n77, n78)	EIRP < 1Watt		
3.5	§24.232(d) §27.50(j)(4)	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §27.53(l)(2)	Conducted Band Edge (5G NR n77, n78)	< 43+10log10(P[Watts])	PASS	-
3.8	§2.1051 §27.53(l)(2)	Conducted Spurious Emission (5G NR n77, n78)	< 43+10log10(P[Watts])	PASS	-
3.9	§2.1055 §27.54	Frequency Stability Temperature & Voltage	Within Authorized Band	PASS	-
4.4	§2.1053 §27.53(l)(2)	Radiated Spurious Emission (5G NR n77, n78)	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 30.99 dB at 11376.000 MHz

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2335-4, XT2335-5, XT2335-6
FCC ID	IHDT56AJ9
IMEI Code	Conducted : 352304690019252/352304690019260 Radiation : 352304690019252/352304690019260
HW Version	DVT2
SW Version	TTP33.28
EUT Stage	Identical Prototype

1.4 Product Specification of Equipment Under Test

Product Feature	
Tx/Rx Frequency	5G NR n77: 3700 MHz ~ 3980 MHz 5G NR n78: 3700 MHz ~ 3800 MHz
Bandwidth	5G NR n77/n78: 20MHz / 30MHz / 40MHz / 50MHz / 60MHz / 70MHz / 80MHz / 90MHz / 100MHz
SCS	30kHz
Antenna Gain	Ant. 2: 5G NR n77 : -4.1 dBi 5G NR n78 : -4.1 dBi Ant. 3: 5G NR n77 : -4.5 dBi 5G NR n78 : -4.5 dBi Ant. 5: 5G NR n77 : -2.3 dBi 5G NR n78 : -2.3 dBi Ant. 7: 5G NR n77 : -4.1 dBi 5G NR n78 : -4.3 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

Remark:

1. The maximum EIRP is calculated from max output power and max antenna gain, only the maximum EIRP of Antenna 5 is shown in the report.
2. 5G NR n77/n78 support SA and NSA mode. The whole testing has assessed SA mode for n77/n78 and n77 cover n78 by referring to the higher conducted power for conducted test items.
3. The device supports n77/n78(1T4R) SRS resources on ant.2/3/5/7, only the test data of worst ant.5 is showed in the report according to the maximum power.
4. All the supported ENDC combinations are verified conducted power, only the ENDC combination with highest power are shown in the report.
5. The EN-DC mode combination could be referred to the product spec.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Specification of Accessory

Specification of Accessory				
AC Adapter 1(US)	Brand Name	Motorola(AOHAI)	Model Name	MC-101
AC Adapter 1(EU)	Brand Name	Motorola(AOHAI)	Model Name	MC-102
AC Adapter 1(UK)	Brand Name	Motorola(AOHAI)	Model Name	MC-103
AC Adapter 1(AU)	Brand Name	Motorola(AOHAI)	Model Name	MC-105
AC Adapter 2(US)	Brand Name	Motorola(Chenyang)	Model Name	MC-101
AC Adapter 2(EU)	Brand Name	Motorola(Chenyang)	Model Name	MC-102
AC Adapter 2(UK)	Brand Name	Motorola(Chenyang)	Model Name	MC-103
AC Adapter 2(AU)	Brand Name	Motorola(Chenyang)	Model Name	MC-105
AC Adapter 3(US)	Brand Name	Motorola(Salcomp)	Model Name	MC-101
AC Adapter 3(EU)	Brand Name	Motorola(Salcomp)	Model Name	MC-102
AC Adapter 3(UK)	Brand Name	Motorola(Salcomp)	Model Name	MC-103
AC Adapter 3(AU)	Brand Name	Motorola(Salcomp)	Model Name	MC-105
AC Adapter 4(US)	Brand Name	Motorola(Salcomp)	Model Name	MC-201L
AC Adapter 4(EU)	Brand Name	Motorola(Salcomp)	Model Name	MC-202L
AC Adapter 4(AR)	Brand Name	Motorola(Salcomp)	Model Name	MC-206L
AC Adapter 4(BR)	Brand Name	Motorola(Salcomp)	Model Name	MC-207L
AC Adapter 4(CHILE)	Brand Name	Motorola(Salcomp)	Model Name	MC-209L
AC Adapter 5(US)	Brand Name	Motorola(AOHAI)	Model Name	MC-201L
AC Adapter 5(EU)	Brand Name	Motorola(AOHAI)	Model Name	MC-202L
AC Adapter 5(AR)	Brand Name	Motorola(AOHAI)	Model Name	MC-206L
AC Adapter 6(BR)	Brand Name	Motorola(Chenyang)	Model Name	MC-207
Battery 1	Brand Name	Motorola(ATL)	Model Name	NH50
Battery 2	Brand Name	Motorola(SUNWODA)	Model Name	NH50
Earphone 1	Brand Name	Motorola(New Leader)	Model Name	MH202
Earphone 2	Brand Name	Motorola(Lyand)	Model Name	MH202
USB Cable 1	Brand Name	Motorola (kawakami)	Model Name	S928D67706
USB Cable 2	Brand Name	Motorola (Beauford)	Model Name	S928D70140

1.7 Maximum EIRP Power and Emission Designator

5G NR n77 SA		PI/2 BPSK / QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
20	3710.01 ~ 3969.99	0.1361	18M6G7D	0.1084	18M8W7D
30	3715.02 ~ 3965.01	0.1435	27M9G7D	0.1026	28M0W7D
40	3720.00 ~ 3960.00	0.1371	38M1G7D	0.1161	38M0W7D
50	3725.01 ~ 3954.99	0.1294	48M0G7D	0.1140	47M6W7D
60	3730.02 ~ 3949.98	0.1291	58M0G7D	0.1057	58M1W7D
70	3735.00 ~ 3945.00	0.1285	67M8G7D	0.1109	67M9W7D
80	3740.01 ~ 3939.99	0.1268	77M7G7D	0.1052	77M5W7D
90	3745.02 ~ 3934.98	0.1294	87M0G7D	0.1084	87M6W7D
100	3750.00 ~ 3930.00	0.1442	97M5G7D	0.1091	97M7W7D

5G NR n78 SA		PI/2 BPSK / QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
20	3710.01 ~ 3789.99	0.1390	18M6G7D	0.1112	18M8W7D
30	3715.02 ~ 3784.98	0.1393	27M9G7D	0.1178	28M0W7D
40	3720.00 ~ 3780.00	0.1419	38M1G7D	0.1169	38M0W7D
50	3725.01 ~ 3774.99	0.1294	48M0G7D	0.1076	47M6W7D
60	3730.02 ~ 3769.98	0.1276	58M0G7D	0.1079	58M1W7D
70	3735.00 ~ 3765.00	0.1291	67M8G7D	0.1059	67M9W7D
80	3740.01 ~ 3759.99	0.1271	77M7G7D	0.1084	77M5W7D
90	3745.02 ~ 3754.98	0.1268	87M0G7D	0.1084	87M6W7D
100	3750.00	0.1330	97M5G7D	0.1064	97M7W7D

Note:

- 5G NR n77 overlaps the entire frequency range of 5G NR n78, and n77 power > n78 power. Therefore, the conducted test results of n77 provided in this report cover n78.
- All modulations have been tested, and only the worst test results of PSK & QAM are shown in the report.

1.8 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-KS TH01-KS	CN1257	314309

1.9 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH04-KS	AUDIX	E3	6.2009-8-24a1

1.10 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 270
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2 Test Configuration of Equipment Under Test


2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Test Items	5G NR	Bandwidth (MHz)										Modulation					RB #		Test Channel				
		10	15	20	30	40	50	60	70	80	90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256 QAM	1	Full	L	M	H	
Max. Output Power	n77	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	n78	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	n77	-	-									v	v	v				v	v			v	
26dB and 99% Bandwidth	n77	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v		v			v	
Conducted Band Edge	n77	-	-	v				v				v	v	v				v	v	v		v	
Conducted Spurious Emission	n77	-	-	v				v				v	v					v		v	v	v	
Frequency Stability	n77	-	-	v									v						v			v	
E.R.P / E.I.R.P	n77	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Radiated Spurious Emission	n77	Worst Case																			v		
Note	<ol style="list-style-type: none"> The mark "v" means that this configuration is chosen for testing The mark "-" means that this bandwidth is not supported. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. Based on engineering evaluation, only the worst modulations test results are shown in the report. Frequency Stability : Normal Voltage = 3.87V ; Low Voltage =3.6V. ; High Voltage =4.45V 																						

2.2 Connection Diagram of Test System

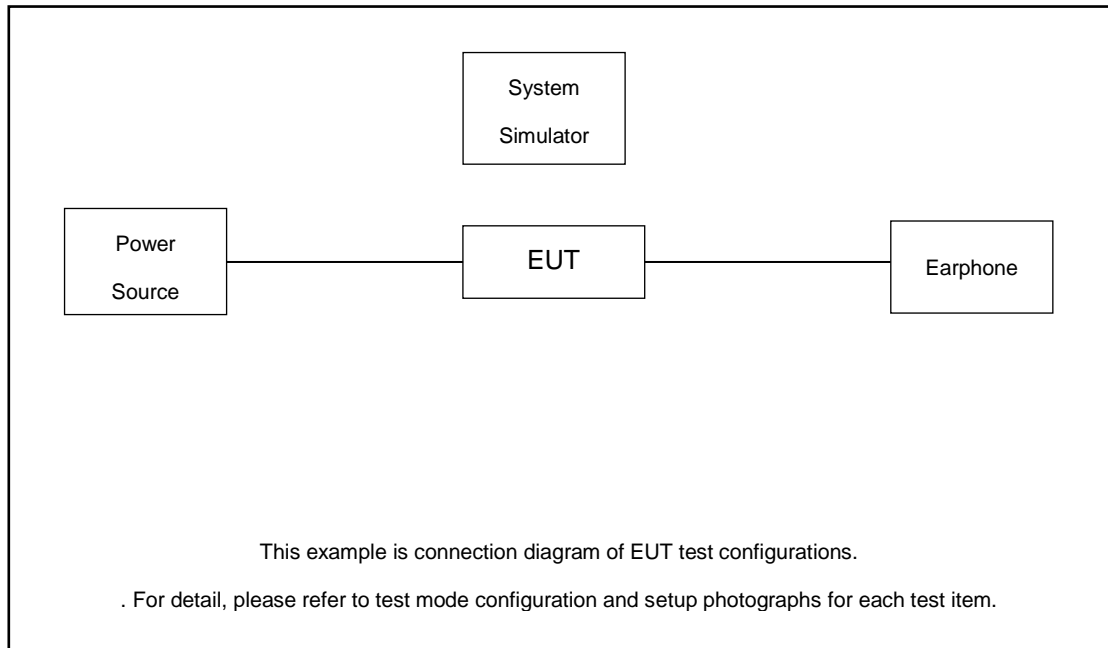

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 6.50 dB.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 6.50 \text{ (dB)} \end{aligned}$$

2.5 Frequency List of Low/Middle/High Channels

5G n77 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	650000	656000	662000
	Frequency	3750	3840	3930
90	Channel	649668	656000	662332
	Frequency	3745.02	3840	3934.98
80	Channel	649334	656000	662666
	Frequency	3740.01	3840	3939.99
70	Channel	649000	656000	663000
	Frequency	3735	3840	3945
60	Channel	648668	656000	663332
	Frequency	3730.02	3840	3949.98
50	Channel	648334	656000	663666
	Frequency	3725.01	3840	3954.99
40	Channel	648000	656000	664000
	Frequency	3720	3840	3960
30	Channel	647668	656000	664332
	Frequency	3715.02	3840	3964.98
20	Channel	647334	656000	664666
	Frequency	3710.01	3840	3969.99

5G n78 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	650000		
	Frequency	3750		
90	Channel	649668	650000	650332
	Frequency	3745.02	3750	3754.98
80	Channel	649334	650000	650666
	Frequency	3740.01	3750	3759.99
70	Channel	649000	650000	651000
	Frequency	3735	3750	3765
60	Channel	648668	650000	651332
	Frequency	3730.02	3750	3769.98
50	Channel	648334	650000	651666
	Frequency	3725.01	3750	3774.99
40	Channel	648000	650000	652000
	Frequency	3720	3750	3780
30	Channel	647668	650000	652332
	Frequency	3715.02	3750	3784.98
20	Channel	647334	650000	652666
	Frequency	3710.01	3750	3789.99


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

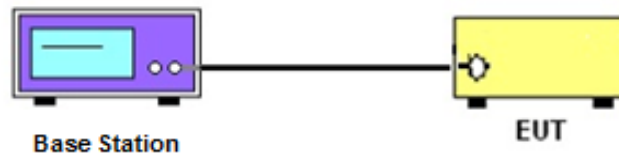

3.2.2 Peak-to-Average Ratio, Occupied / 26dB Bandwidth ,Band-Edge and Conducted Spurious Emission

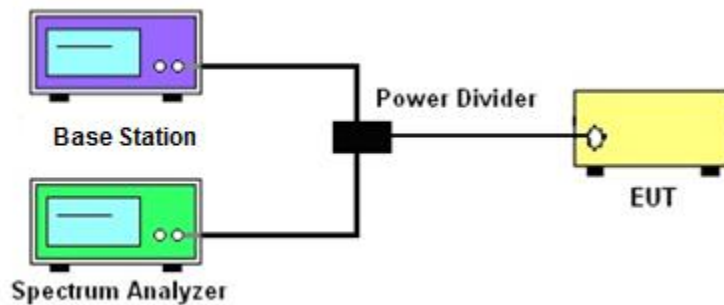

3.2.3 Frequency Stability

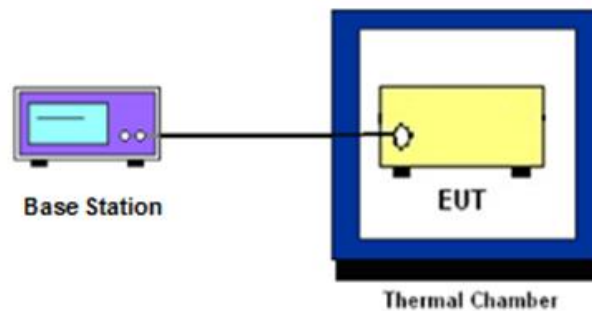

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power and EIRP

3.4.1 Description of the Conducted Output Power Measurement and EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The EIRP of mobile transmitters must not exceed 1 Watts for 5G NR n77, n78.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.6 (PAPR).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set EUT in maximum power output.
4. Set the RBW = 1MHz, VBW = 3MHz, Detector = Peak, Trace mode = max hold, Set span $\geq 2 \times$ OBW in spectrum analyzer.
5. Set the RBW = 1MHz, VBW = 3MHz, Detector = power averaging, Trace mode = max hold, Set span $\geq 2 \times$ OBW in spectrum analyzer.
6. Add $[10 \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission.
7. $\text{PAPR (dB)} = P_{\text{Pk}} \text{ (dBm)} - P_{\text{Avg}} \text{ (dBm)}$
where
PAPR peak-to-average power ratio, in dB
 P_{Pk} measured peak power level, in dBm
 P_{Avg} measured average power level, in dBm
8. Record the deviation as Peak to Average Ratio.

3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

27.53(l)(2)

For mobile operations in the 3700-3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz. Compliance with this paragraph is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be either one percent of the emission bandwidth of the fundamental emission of the transmitter or 350 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW \geq 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used or a narrower RBW was used (generally limited to no less than 1% of the OBW) and the measured power was integrated over the full required measurement bandwidth.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Offset has included the duty factor for Band n77/n78. Duty factor $=10 \log (1/x)$, where x is the measured duty cycle
9. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB) = -13 dBm.

10. When using the integration method, the starting frequency of the integration shall be centered at one-half of the RBW away from the band edge.

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. Offset has included the duty factor for Band n77/n78. Duty factor = $10 \log (1/x)$, where x is the measured duty cycle
11. The limit line is derived from $43 + 10 \log (P)$ dB below the transmitter power P(Watts)
= $P(W) - [43 + 10 \log (P)]$ (dB)
= $[30 + 10 \log (P)]$ (dBm) - $[43 + 10 \log (P)]$ (dB)
= -13dBm.

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.

4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test below 30MHz



4.2.2 For radiated test from 30MHz to 1GHz

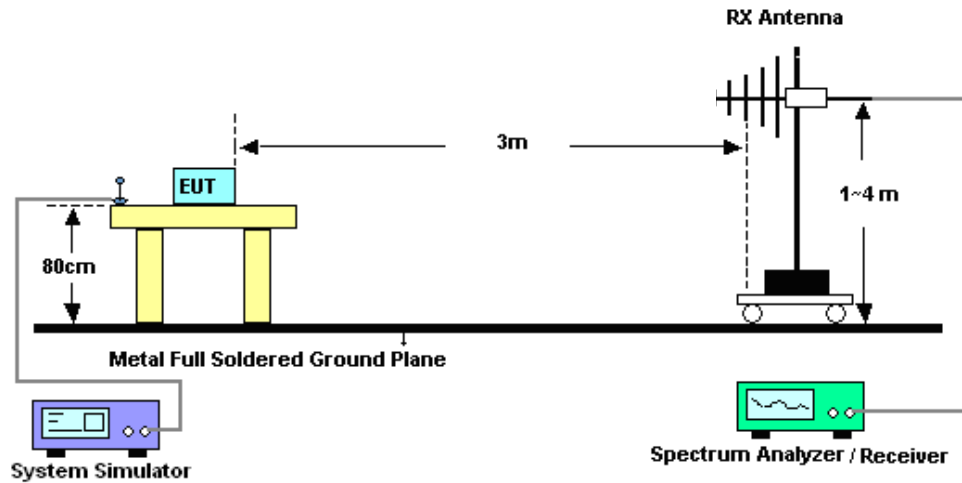

4.2.3 For radiated test above 1GHz



4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [43 + 10\log(P)]$ (dB)
= $[30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
= -13dBm.



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022	Dec. 21, 2022	Oct. 11, 2023	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	Aug. 25, 2022	Dec. 21, 2022	Aug. 24, 2023	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 15, 2022	Dec. 21, 2022	Jul. 14, 2023	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57541079	10Hz~44G,MAX 30dB	Oct. 12, 2022	Dec. 21, 2022	Oct. 11, 2023	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 16, 2022	Dec. 21, 2022	Oct. 15, 2023	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz~1GHz	May 24, 2022	Dec. 21, 2022	May 23, 2023	Radiation (03CH04-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	1284	1GHz~18GHz	Jan. 05, 2022	Dec. 21, 2022	Jan. 04, 2023	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2022	Dec. 21, 2022	Jan. 04, 2023	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	187289	9KHz~1GHz	Jan. 05, 2022	Dec. 21, 2022	Jan. 04, 2023	Radiation (03CH04-KS)
Amplifier	MITEQ	EM18G40G GA	060728	18~40GHz	Jan. 05, 2022	Dec. 21, 2022	Jan. 04, 2023	Radiation (03CH04-KS)
Amplifier	Agilent	8449B	3008A02370	1Ghz~18Ghz	Oct. 12, 2022	Dec. 21, 2022	Oct. 11, 2023	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18G A	060839	1Ghz~18Ghz	Oct. 12, 2022	Dec. 21, 2022	Oct. 11, 2023	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Dec. 21, 2022	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Dec. 21, 2022	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Dec. 21, 2022	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required

6 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±0.56 dB
Conducted Emissions	±0.92 dB
Occupied Channel Bandwidth	±0.03 %

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.3dB
---	-------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8dB
---	-------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8dB
---	-------

----- THE END -----

Appendix A. Test Results of Conducted Test

Test Engineer :	Simle Wang	Temperature :	22~23°C
		Relative Humidity :	40~42%

Conducted Output Power(Average power) and EIRP

5G NR n77:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Gain	EIRP	EIRP	EIRP
Channel				650000	656000	662000		L	M	H
Frequency (MHz)				3750	3840	3930				
100	PI/2 BPSK	1	1	23.30	23.40	23.35	-2.30	0.1259	0.1288	0.1274
100	PI/2 BPSK	1	137	23.35	23.56	23.45	-2.30	0.1274	0.1337	0.1303
100	PI/2 BPSK	1	271	23.10	23.34	23.76	-2.30	0.1202	0.1271	0.1400
100	PI/2 BPSK	135	0	22.16	22.15	22.21	-2.30	0.0968	0.0966	0.0979
100	PI/2 BPSK	135	69	23.21	23.22	23.37	-2.30	0.1233	0.1236	0.1279
100	PI/2 BPSK	135	138	22.14	22.28	22.65	-2.30	0.0964	0.0995	0.1084
100	PI/2 BPSK	270	0	22.15	22.21	22.41	-2.30	0.0966	0.0979	0.1026
100	QPSK	1	1	23.33	23.51	23.45	-2.30	0.1268	0.1321	0.1303
100	QPSK	1	137	23.34	23.33	23.49	-2.30	0.1271	0.1268	0.1315
100	QPSK	1	271	23.20	23.45	23.89	-2.30	0.1230	0.1303	0.1442
100	QPSK	135	0	22.39	22.34	22.42	-2.30	0.1021	0.1009	0.1028
100	QPSK	135	69	23.31	23.31	23.49	-2.30	0.1262	0.1262	0.1315
100	QPSK	135	138	22.36	22.55	22.82	-2.30	0.1014	0.1059	0.1127
100	QPSK	270	0	22.38	22.40	22.58	-2.30	0.1019	0.1023	0.1067
100	16QAM	1	1	22.68	22.65	22.61	-2.30	0.1091	0.1084	0.1074
100	64QAM	1	1	20.55	20.87	20.85	-2.30	0.0668	0.0719	0.0716
100	256QAM	1	1	18.79	18.90	18.87	-2.30	0.0446	0.0457	0.0454
Channel				649668	656000	662332	Gain	EIRP	EIRP	EIRP
Frequency (MHz)				3745.02	3840	3934.98				
90	QPSK	1	1	23.37	23.42	23.14	-2.30	0.1279	0.1294	0.1213
90	16QAM	1	1	22.45	22.65	22.58	-2.30	0.1035	0.1084	0.1067
Channel				649334	656000	662666	Gain	EIRP	EIRP	EIRP
Frequency (MHz)				3740.01	3840	3939.99				
80	QPSK	1	1	23.33	23.27	22.95	-2.30	0.1268	0.1250	0.1161
80	16QAM	1	1	22.52	22.45	22.12	-2.30	0.1052	0.1035	0.0959
Channel				649000	656000	663000	Gain	EIRP	EIRP	EIRP
Frequency (MHz)				3735	3840	3945				
70	QPSK	1	1	23.39	23.25	23.10	-2.30	0.1285	0.1245	0.1202
70	16QAM	1	1	22.65	22.75	22.52	-2.30	0.1084	0.1109	0.1052



Channel				648668	656000	663332	Gain	EIRP	EIRP	EIRP
Frequency (MHz)				3730.02	3840	3949.98				
60	QPSK	1	1	23.41	23.23	23.26	-2.30	0.1291	0.1239	0.1247
60	16QAM	1	1	22.38	22.48	22.54	-2.30	0.1019	0.1042	0.1057
Channel				648334	656000	663666	Gain	EIRP	EIRP	EIRP
Frequency (MHz)				3725.01	3840	3954.99				
50	QPSK	1	1	23.42	23.20	23.38	-2.30	0.1294	0.1230	0.1282
50	16QAM	1	1	22.87	22.64	22.85	-2.30	0.1140	0.1081	0.1135
Channel				648000	656000	664000	Gain	EIRP	EIRP	EIRP
Frequency (MHz)				3720	3840	3960				
40	QPSK	1	1	23.65	23.54	23.67	-2.30	0.1365	0.1330	0.1371
40	16QAM	1	1	22.64	22.78	22.95	-2.30	0.1081	0.1117	0.1161
Channel				647668	656000	664332	Gain	EIRP	EIRP	EIRP
Frequency (MHz)				3715.02	3840	3964.98				
30	QPSK	1	1	23.87	23.56	23.74	-2.30	0.1435	0.1337	0.1393
30	16QAM	1	1	22.22	22.35	22.41	-2.30	0.0982	0.1012	0.1026
Channel				647334	656000	664666	Gain	EIRP	EIRP	EIRP
Frequency (MHz)				3710.01	3840	3969.99				
20	QPSK	1	1	23.42	23.64	23.59	-2.30	0.1294	0.1361	0.1346
20	16QAM	1	1	22.65	22.35	22.54	-2.30	0.1084	0.1012	0.1057



5G NR n78:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Gain	EIRP	EIRP	EIRP
Channel				650000				L	M	H
Frequency (MHz)				3750						
100	PI/2 BPSK	1	1		23.23		-2.30		0.1239	
100	PI/2 BPSK	1	137		23.44		-2.30		0.1300	
100	PI/2 BPSK	1	271		23.45		-2.30		0.1303	
100	PI/2 BPSK	135	0		22.31		-2.30		0.1002	
100	PI/2 BPSK	135	69		23.41		-2.30		0.1291	
100	PI/2 BPSK	135	138		22.37		-2.30		0.1016	
100	PI/2 BPSK	270	0		22.32		-2.30		0.1005	
100	QPSK	1	1		23.31		-2.30		0.1262	
100	QPSK	1	137		23.54		-2.30		0.1330	
100	QPSK	1	271		23.53		-2.30		0.1327	
100	QPSK	135	0		22.50		-2.30		0.1047	
100	QPSK	135	69		23.49		-2.30		0.1315	
100	QPSK	135	138		22.58		-2.30		0.1067	
100	QPSK	270	0		22.51		-2.30		0.1050	
100	16QAM	1	1		22.57		-2.30		0.1064	
100	64QAM	1	1		20.78		-2.30		0.0705	
100	256QAM	1	1		18.74		-2.30		0.0441	
Channel				649668	650000	650332	Gain	EIRP	EIRP	EIRP
Frequency (MHz)				3745.02	3750	3754.98				
90	QPSK	1	1	23.33	23.30	23.31	-2.30	0.1268	0.1259	0.1262
90	16QAM	1	1	22.47	22.46	22.65	-2.30	0.1040	0.1038	0.1084
Channel				649334	650000	650666	Gain	EIRP	EIRP	EIRP
Frequency (MHz)				3740.01	3750	3759.99				
80	QPSK	1	1	23.34	23.25	23.15	-2.30	0.1271	0.1245	0.1216
80	16QAM	1	1	22.65	22.41	22.52	-2.30	0.1084	0.1026	0.1052
Channel				649000	650000	651000	Gain	EIRP	EIRP	EIRP
Frequency (MHz)				3735	3750	3765				
70	QPSK	1	1	23.41	23.27	23.29	-2.30	0.1291	0.1250	0.1256
70	16QAM	1	1	22.55	22.41	22.45	-2.30	0.1059	0.1026	0.1035
Channel				648668	650000	651332	Gain	EIRP	EIRP	EIRP
Frequency (MHz)				3730.02	3750	3769.98				
60	QPSK	1	1	23.36	23.18	23.28	-2.30	0.1276	0.1225	0.1253
60	16QAM	1	1	22.63	22.51	22.34	-2.30	0.1079	0.1050	0.1009
Channel				648334	650000	651666	Gain	EIRP	EIRP	EIRP
Frequency (MHz)				3725.01	3750	3774.99				
50	QPSK	1	1	23.41	23.26	23.42	-2.30	0.1291	0.1247	0.1294
50	16QAM	1	1	22.25	22.62	22.41	-2.30	0.0989	0.1076	0.1026




Channel				648000	650000	652000	Gain	EIRP	EIRP	EIRP
Frequency (MHz)				3720	3750	3780				
40	QPSK	1	1	23.79	23.68	23.82	-2.30	0.1409	0.1374	0.1419
40	16QAM	1	1	22.90	22.87	22.98	-2.30	0.1148	0.1140	0.1169
Channel				647668	650000	652332	Gain	EIRP	EIRP	EIRP
Frequency (MHz)				3715.02	3750	3784.98				
30	QPSK	1	1	23.74	23.67	23.73	-2.30	0.1393	0.1371	0.1390
30	16QAM	1	1	23.01	23.00	22.95	-2.30	0.1178	0.1175	0.1161
Channel				647334	650000	652666	Gain	EIRP	EIRP	EIRP
Frequency (MHz)				3710.01	3750	3789.99				
20	QPSK	1	1	23.63	23.62	23.73	-2.30	0.1358	0.1355	0.1390
20	16QAM	1	1	22.76	22.65	22.54	-2.30	0.1112	0.1084	0.1057



FR1 n77

Peak-to-Average Ratio

Mode	FR1 n77 / 100MHz / DFT-S OFDM				
Mod.	100M				Limit: 13dB
RB Size	BPSK	QPSK			Result
Middle CH	5.26	5.18			PASS

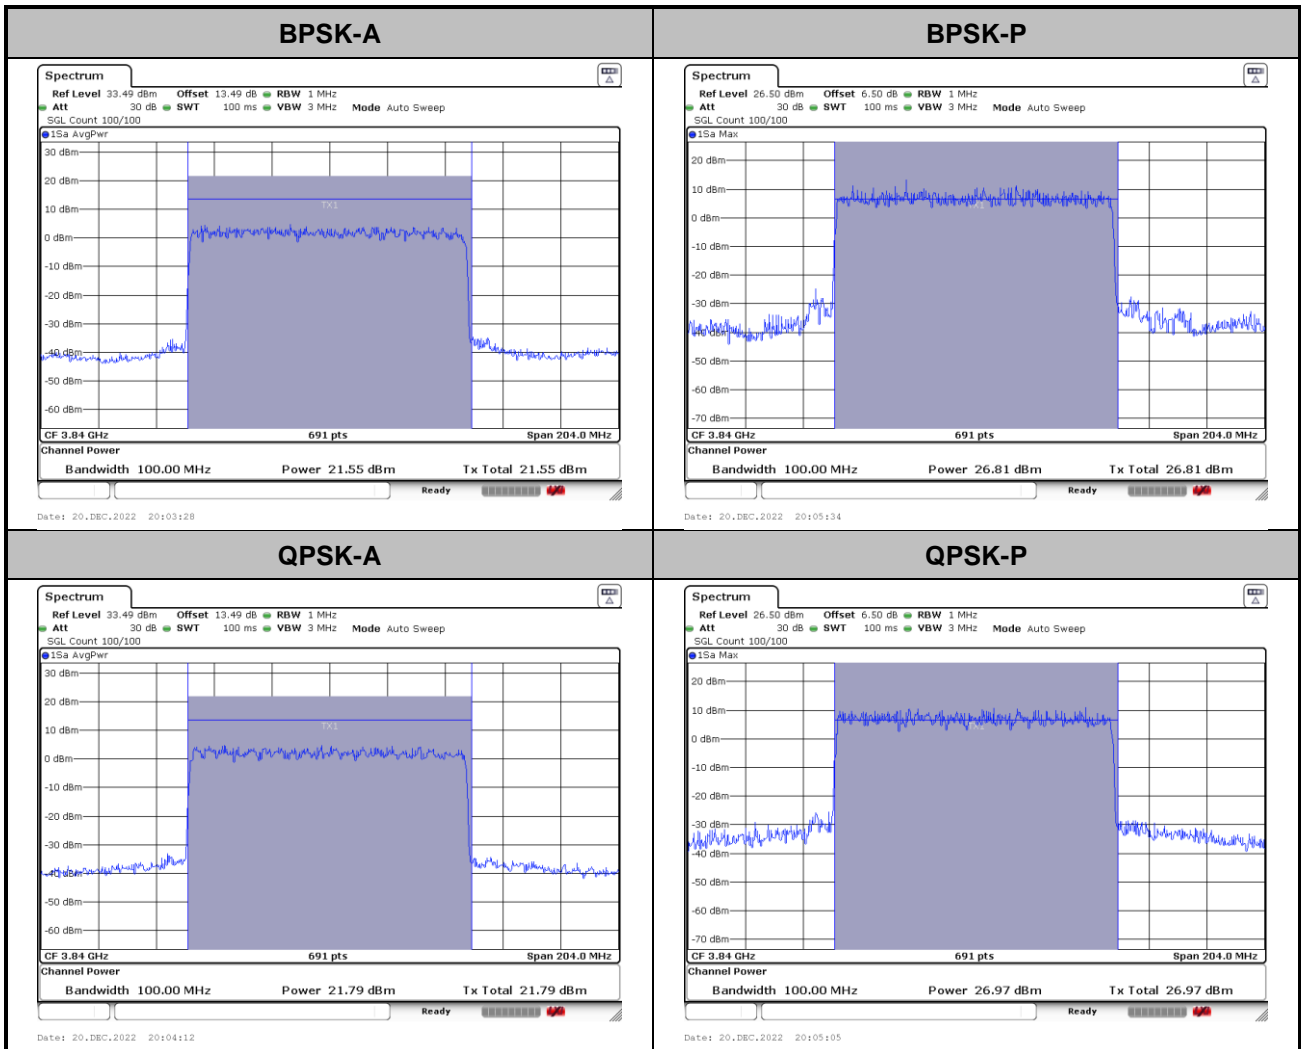




26dB Bandwidth

Mode	FR1 n77 : 26dB BW(20 MHz) / CP OFDM			
BW	CP			
Mod.	QPSK	16QAM	64QAM	256QAM
Middle CH	20.42	20.62	20.30	20.54
Mode	FR1 n77 : 26dB BW(30 MHz) / CP OFDM			
BW	CP			
Mod.	QPSK	16QAM	64QAM	256QAM
Middle CH	28.85	28.93	29.01	28.93
Mode	FR1 n77 : 26dB BW(40 MHz) / CP OFDM			
BW	CP			
Mod.	QPSK	16QAM	64QAM	256QAM
Middle CH	40.12	40.12	40.20	40.36
Mode	FR1 n78 : 26dB BW(50 MHz) / CP OFDM			
BW	CP			
Mod.	QPSK	16QAM	64QAM	256QAM
Middle CH	49.75	49.75	49.55	49.45
Mode	FR1 n78 : 26dB BW(60 MHz) / CP OFDM			
BW	CP			
Mod.	QPSK	16QAM	64QAM	256QAM
Middle CH	60.42	60.42	60.54	60.30
Mode	FR1 n78 : 26dB BW(70 MHz) / CP OFDM			
BW	CP			
Mod.	QPSK	16QAM	64QAM	256QAM
Middle CH	70.17	70.33	70.17	70.33
Mode	FR1 n78 : 26dB BW(80 MHz) / CP OFDM			
BW	CP			
Mod.	QPSK	16QAM	64QAM	256QAM
Middle CH	79.76	80.08	79.76	79.92
Mode	FR1 n78 : 26dB BW(90 MHz) / CP OFDM			
BW	CP			
Mod.	QPSK	16QAM	64QAM	256QAM
Middle CH	92.25	92.61	92.43	92.25
Mode	FR1 n78 : 26dB BW(100 MHz) / CP OFDM			
BW	CP			
Mod.	QPSK	16QAM	64QAM	256QAM
Middle CH	102.3	102.3	102.5	102.1




20MHz CP

QPSK

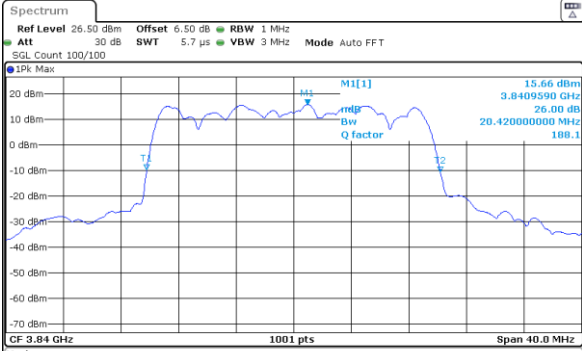


Date: 20_DEC.2022 20:30:44

16QAM

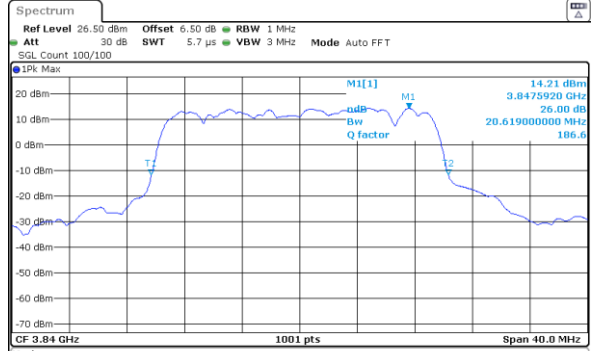


Date: 20_DEC.2022 20:31:01

64QAM

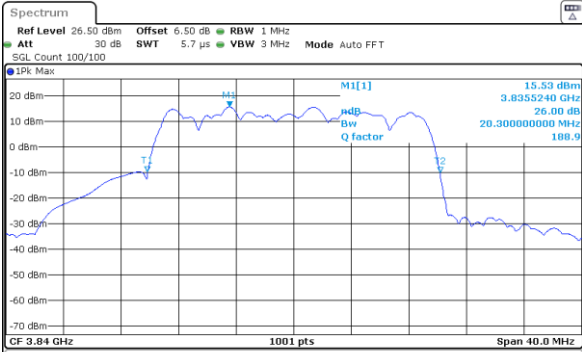

Date: 20_DEC.2022 20:31:18

256QAM

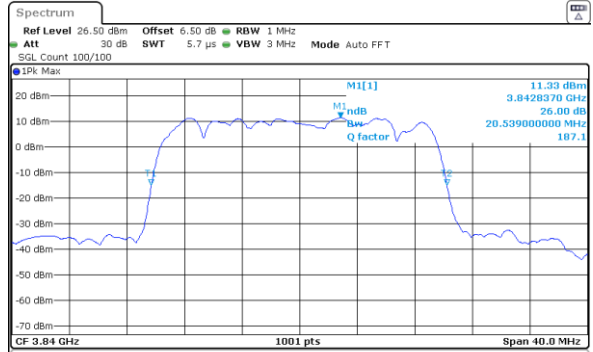


Date: 20_DEC.2022 20:31:39



30MHz CP


QPSK

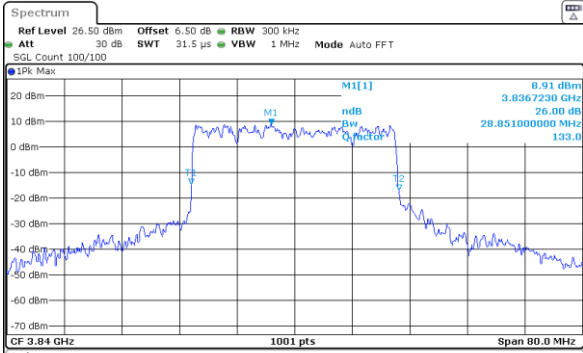

Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1	1			3.836723 GHz	8.91 dBm	ndB down	28.851 MHz
T1	1			3.825614 GHz	-14.51 dBm	ndB	26.00 dB
T2	1			3.854466 GHz	-16.99 dBm	Q factor	133.0

Date: 20_DEC.2022 20:28:57


16QAM

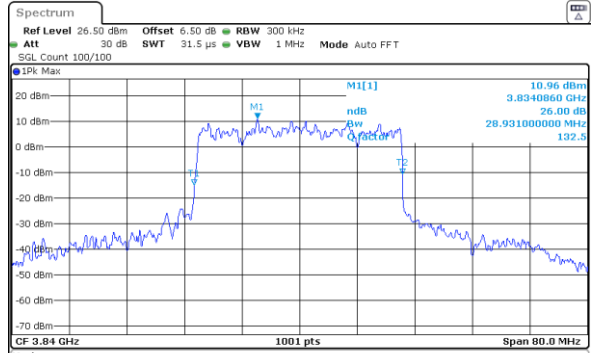

Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1	1			3.834086 GHz	10.96 dBm	ndB down	28.931 MHz
T1	1			3.825375 GHz	-14.84 dBm	ndB	26.00 dB
T2	1			3.854306 GHz	-10.78 dBm	Q factor	132.5

Date: 20_DEC.2022 20:29:30


64QAM

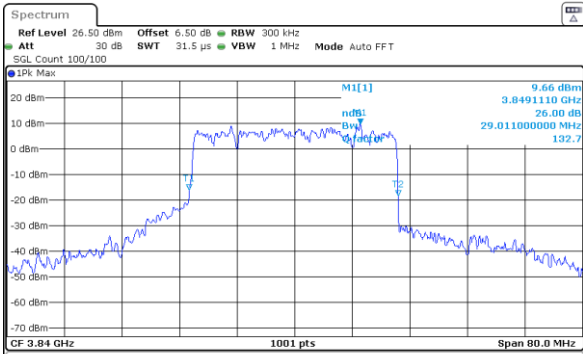

Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1	1			3.849111 GHz	9.66 dBm	ndB down	29.011 MHz
T1	1			3.825375 GHz	-16.01 dBm	ndB	26.00 dB
T2	1			3.854386 GHz	-18.33 dBm	Q factor	132.7

Date: 20_DEC.2022 20:29:59

256QAM

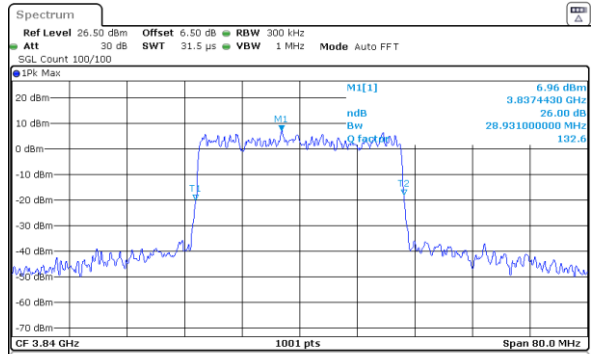


Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1	1			3.837443 GHz	6.96 dBm	ndB down	28.931 MHz
T1	1			3.825534 GHz	-19.96 dBm	ndB	26.00 dB
T2	1			3.854466 GHz	-18.12 dBm	Q factor	132.6

Date: 20_DEC.2022 20:30:15




40MHz CP

QPSK

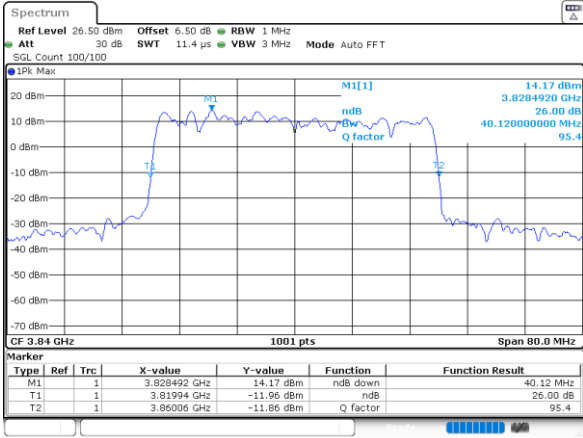


Date: 20_DEC.2022 20:26:49

16QAM

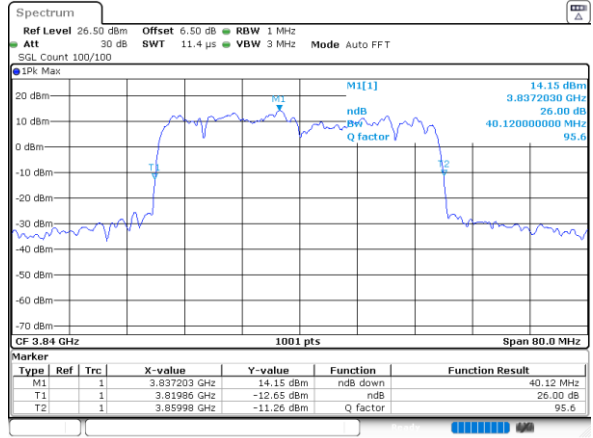


Date: 20_DEC.2022 20:27:20

64QAM

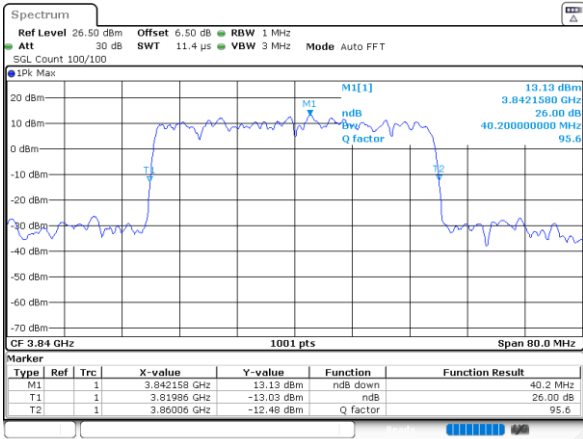

Date: 20_DEC.2022 20:27:40

256QAM

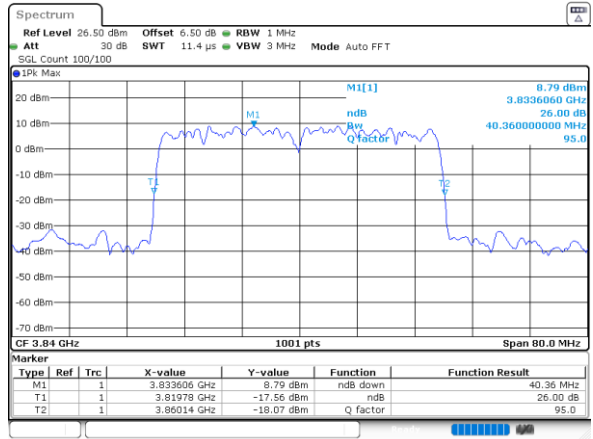


Date: 20_DEC.2022 20:27:59




50MHz CP

QPSK

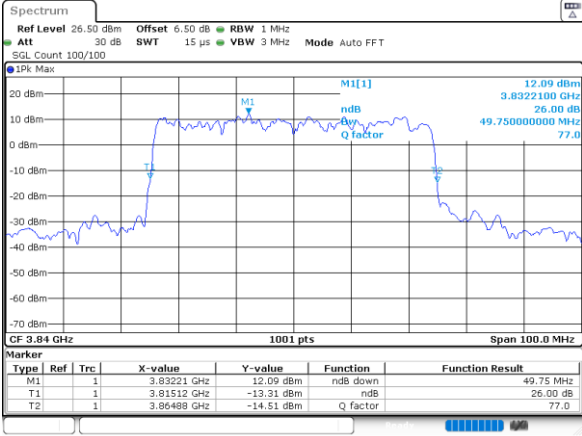


Date: 20_DEC.2022 20:25:26

16QAM

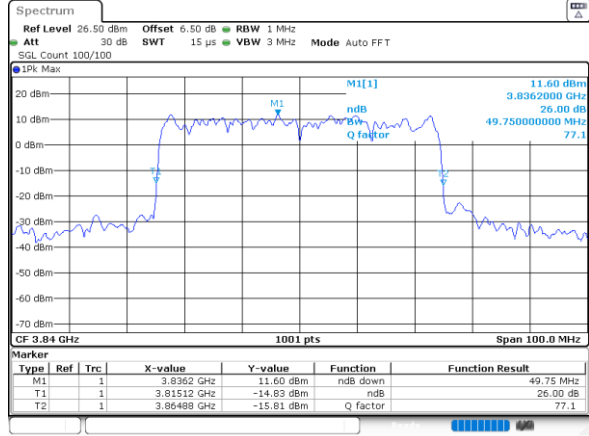


Date: 20_DEC.2022 20:25:45

64QAM

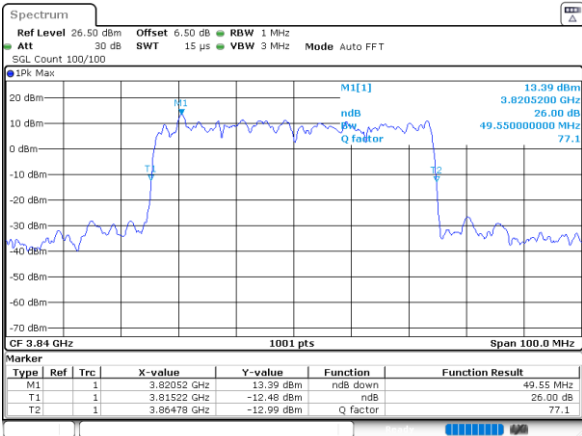

Date: 20_DEC.2022 20:26:03

256QAM

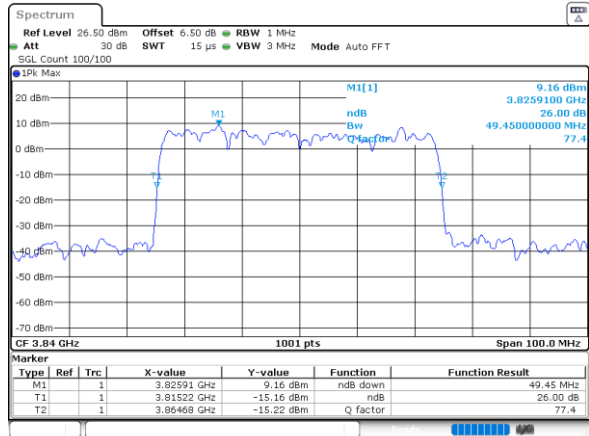


Date: 20_DEC.2022 20:26:19




60MHz CP

QPSK

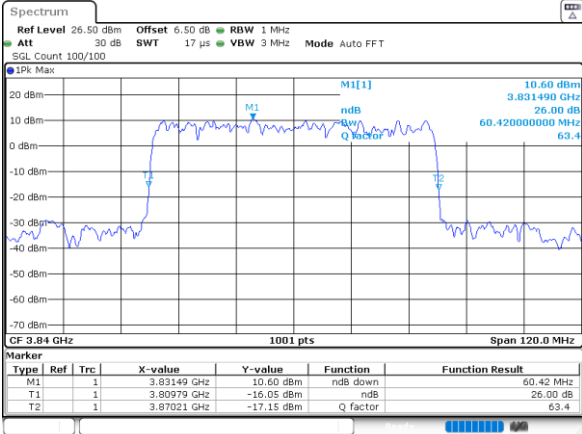


Date: 20_DEC_2022 20:22:32

16QAM

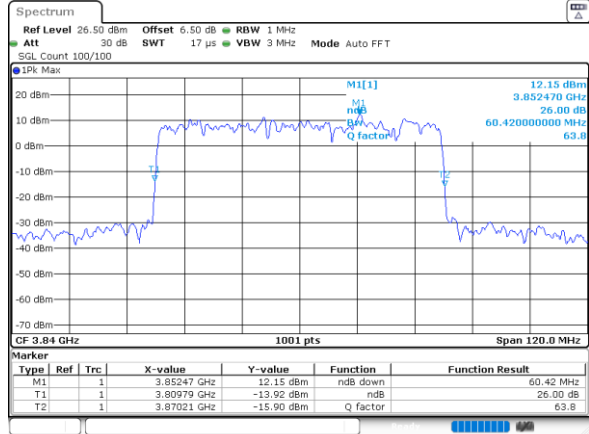


Date: 20_DEC_2022 20:22:50

64QAM

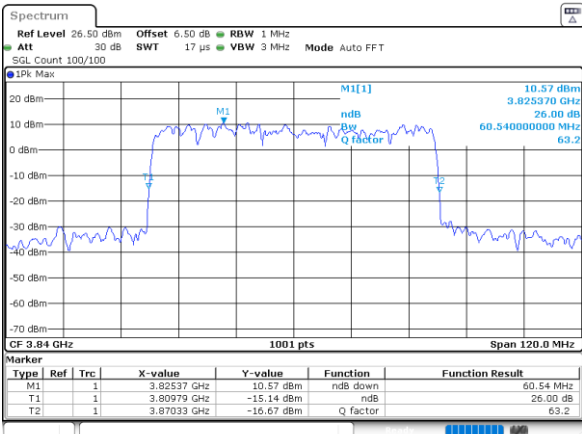

Date: 20_DEC_2022 20:23:07

256QAM

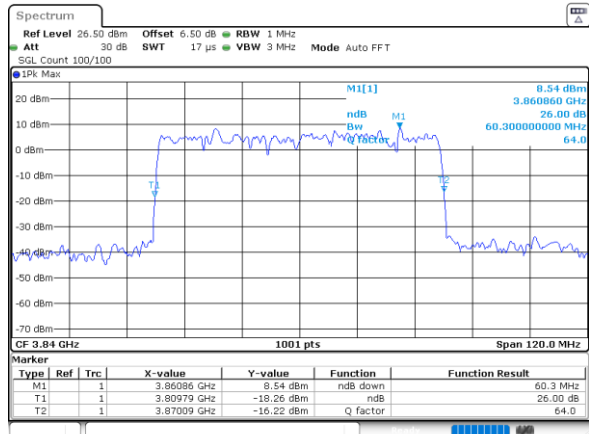


Date: 20_DEC_2022 20:23:25




70MHz CP

QPSK

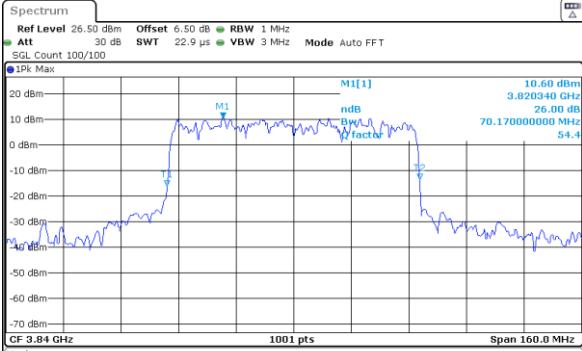


Date: 20_DEC.2022 20:20:51

16QAM

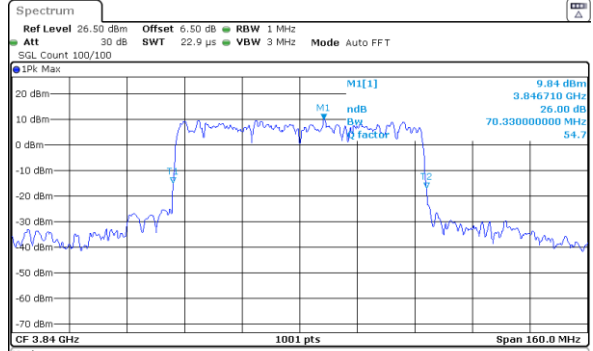


Date: 20_DEC.2022 20:21:08

64QAM

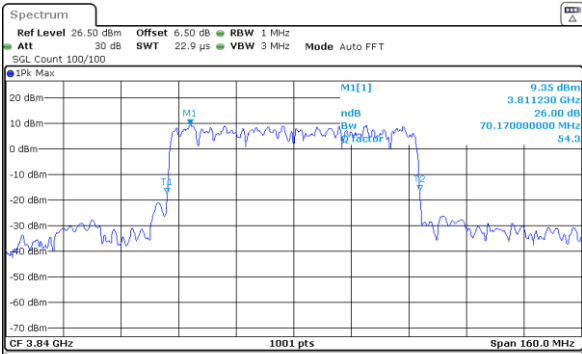

Date: 20_DEC.2022 20:21:25

256QAM

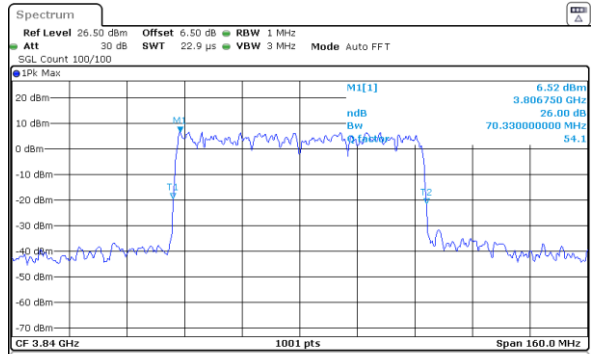


Date: 20_DEC.2022 20:21:45




80MHz CP

QPSK

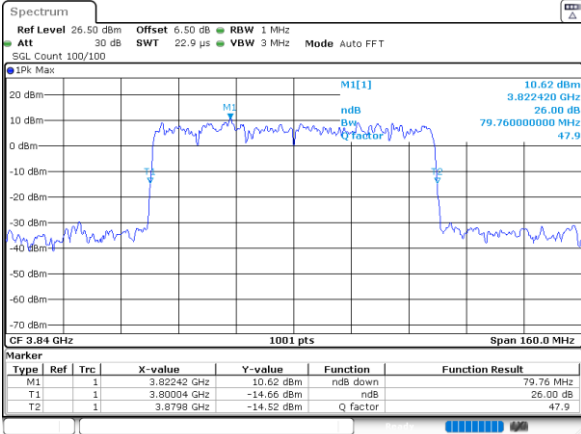


Date: 20_DEC.2022 20:19:23

16QAM

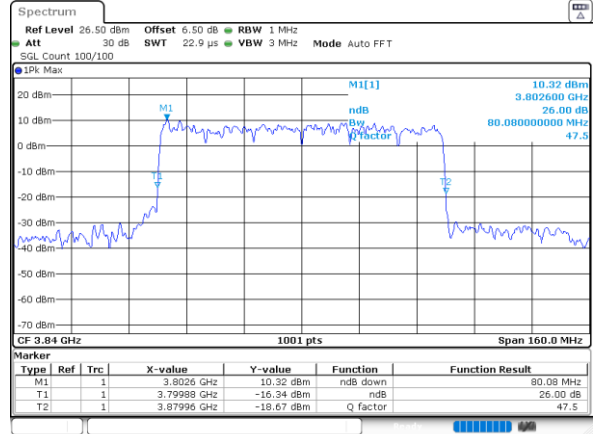


Date: 20_DEC.2022 20:19:42

64QAM

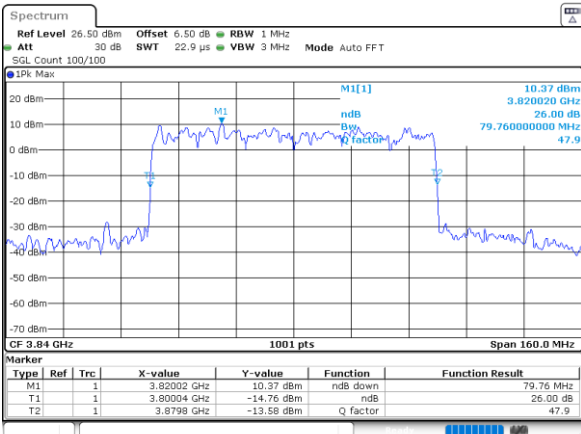

Date: 20_DEC.2022 20:20:02

256QAM

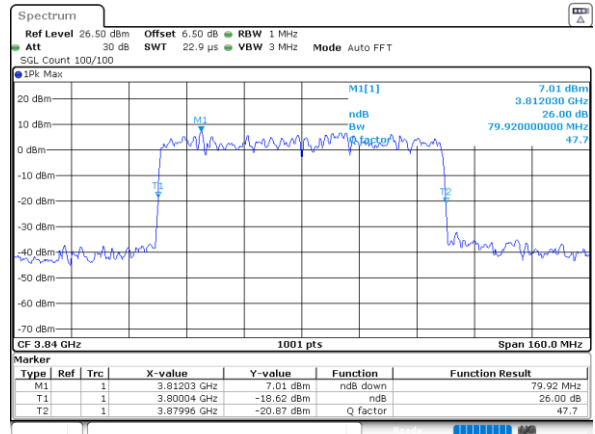


Date: 20_DEC.2022 20:20:20




90MHz CP

QPSK

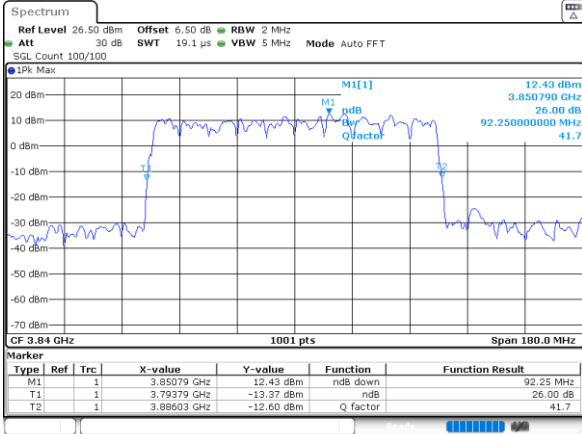


Date: 20_DEC.2022 20:17:34

16QAM

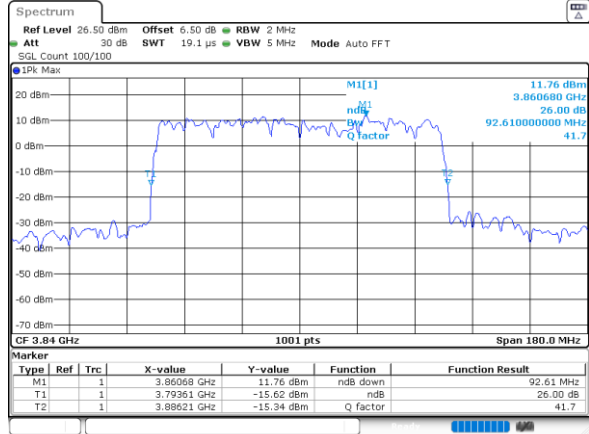


Date: 20_DEC.2022 20:17:56

64QAM

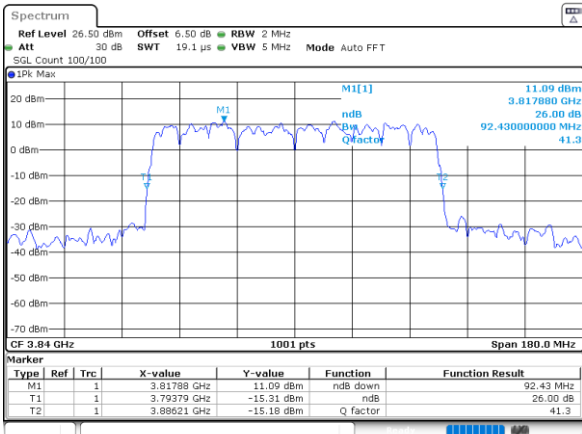

Date: 20_DEC.2022 20:18:16

256QAM

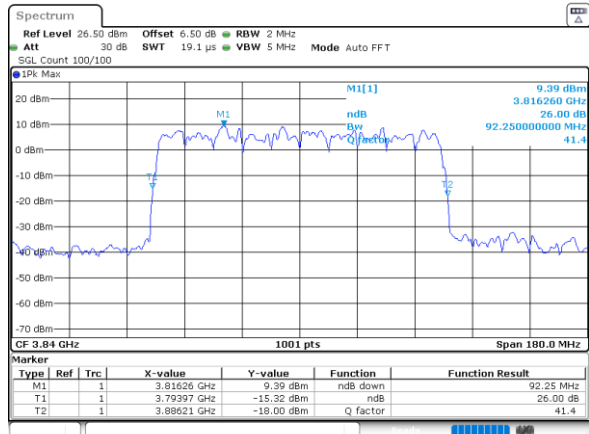


Date: 20_DEC.2022 20:18:36




100MHz CP

QPSK

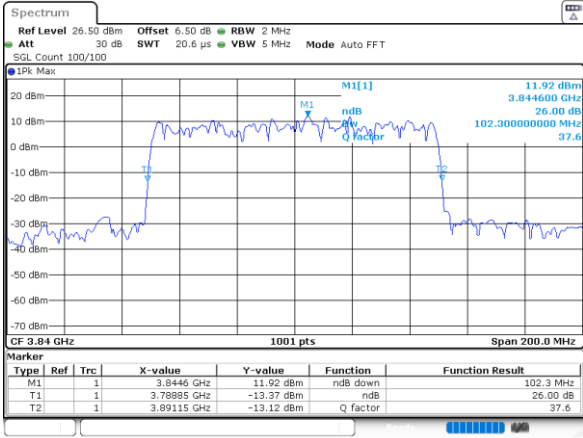


Date: 20_DEC.2022 20:16:05

16QAM

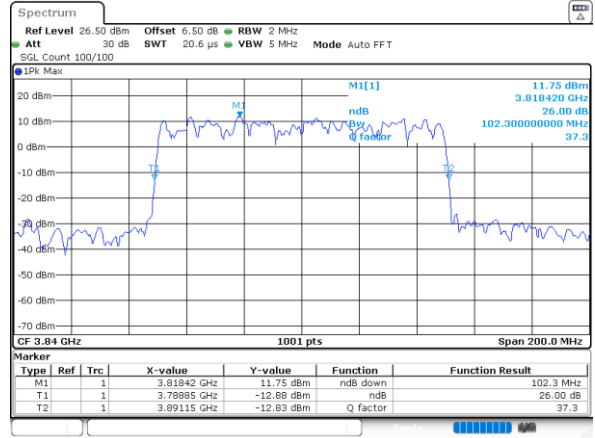


Date: 20_DEC.2022 20:16:28

64QAM

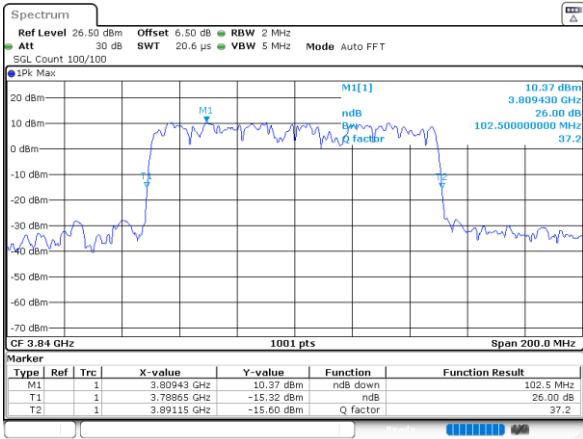

Date: 20_DEC.2022 20:16:47

256QAM

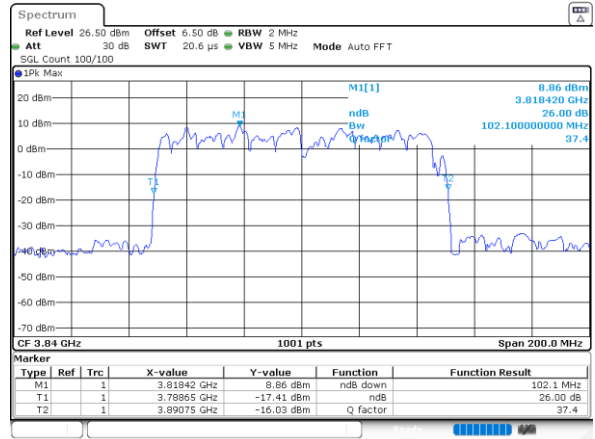

Date: 20_DEC.2022 20:17:06


Occupied Bandwidth

Mode	FR1 n78 : OB BW(20 MHz) / CP OFDM			
BW	CP			
Mod.	QPSK	16QAM	64QAM	256QAM
Middle CH	18.58	18.82	18.38	18.54
Mode	FR1 n78 : OB BW(30 MHz) / CP OFDM			
BW	CP			
Mod.	QPSK	16QAM	64QAM	256QAM
Middle CH	27.89	27.89	27.97	27.81
Mode	FR1 n78 : OB BW(40 MHz) / CP OFDM			
BW	CP			
Mod.	QPSK	16QAM	64QAM	256QAM
Middle CH	38.12	38.04	37.88	37.88
Mode	FR1 n78 : OB BW(50 MHz) / CP OFDM			
BW	CP			
Mod.	QPSK	16QAM	64QAM	256QAM
Middle CH	47.95	47.45	47.55	47.35
Mode	FR1 n78 : OB BW(60 MHz) / CP OFDM			
BW	CP			
Mod.	QPSK	16QAM	64QAM	256QAM
Middle CH	58.02	58.14	57.54	57.66
Mode	FR1 n78 : OB BW(70 MHz) / CP OFDM			
BW	CP			
Mod.	QPSK	16QAM	64QAM	256QAM
Middle CH	67.77	67.92	67.61	67.77
Mode	FR1 n78 : OB BW(80 MHz) / CP OFDM			
BW	CP			
Mod.	QPSK	16QAM	64QAM	256QAM
Middle CH	77.68	77.52	77.36	76.72
Mode	FR1 n78 : OB BW(90 MHz) / CP OFDM			
BW	CP			
Mod.	QPSK	16QAM	64QAM	256QAM
Middle CH	87.03	87.57	87.57	87.21
Mode	FR1 n78 : OB BW(100 MHz) / CP OFDM			
BW	CP			
Mod.	QPSK	16QAM	64QAM	256QAM
Middle CH	97.50	97.70	97.30	96.90




20MHz CP

QPSK

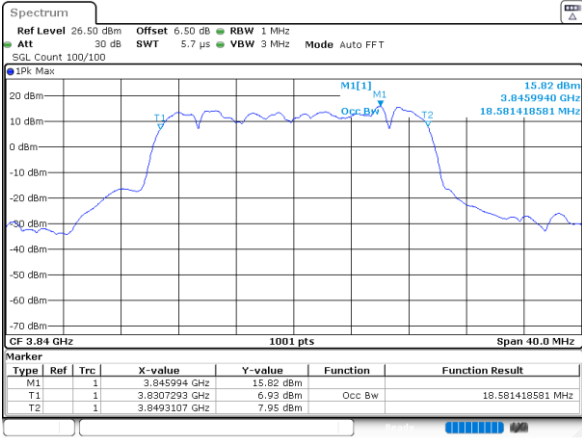


Date: 20_DEC.2022 20:30:49

16QAM

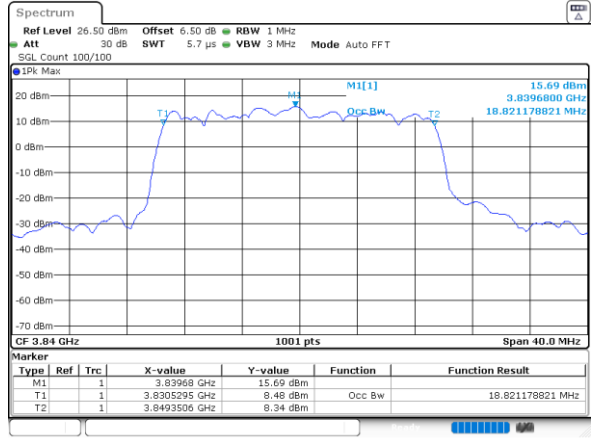


Date: 20_DEC.2022 20:31:08

64QAM

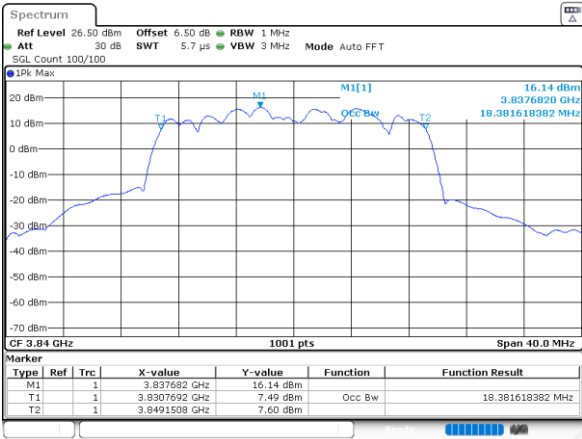

Date: 20_DEC.2022 20:31:26

256QAM

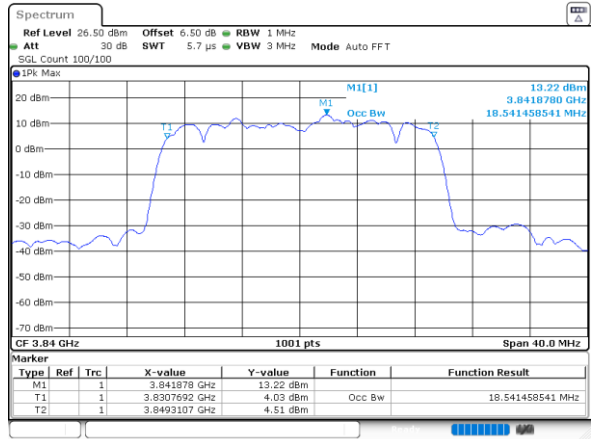


Date: 20_DEC.2022 20:31:48




30MHz CP

QPSK

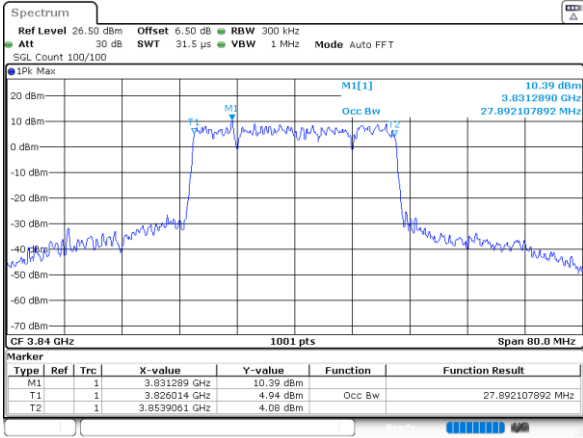


Date: 20_DEC.2022 20:29:07

16QAM

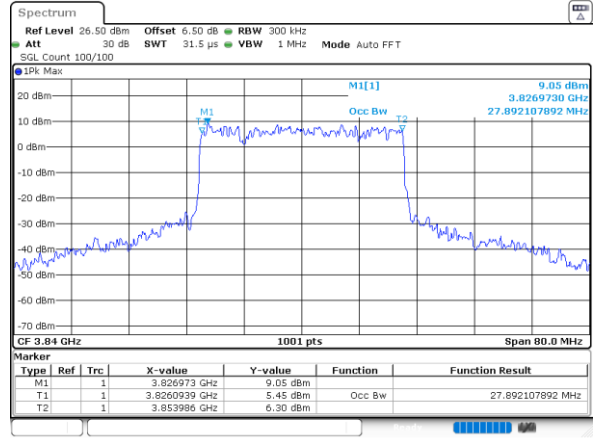


Date: 20_DEC.2022 20:29:44

64QAM

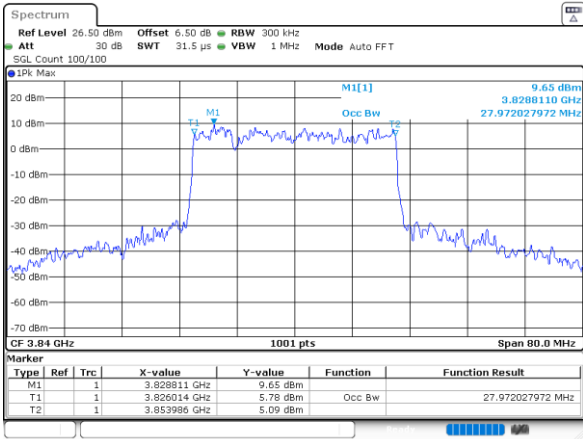

Date: 20_DEC.2022 20:30:04

256QAM

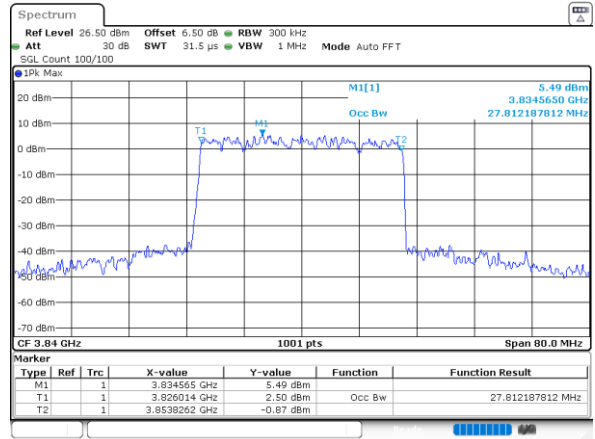


Date: 20_DEC.2022 20:30:21




40MHz CP

QPSK

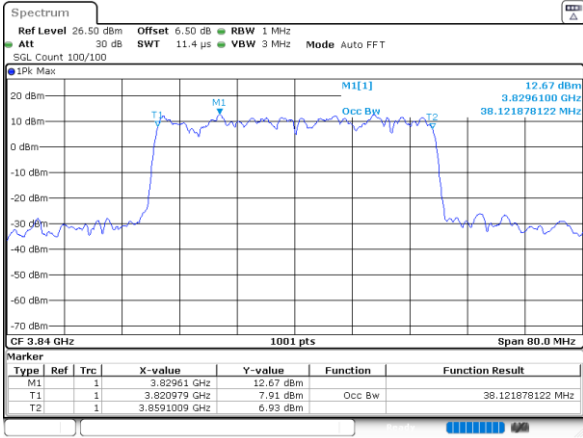


Date: 20_DEC.2022 20:26:54

16QAM

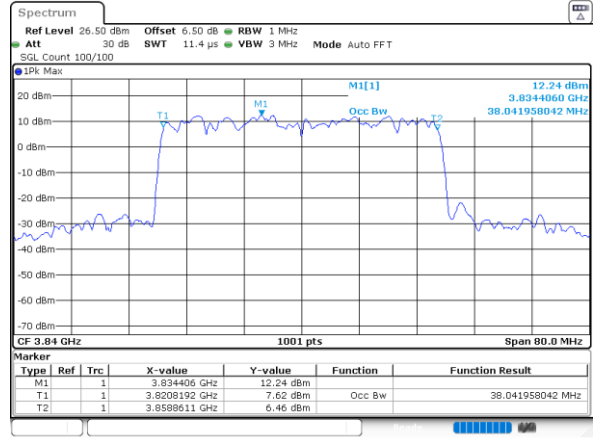


Date: 20_DEC.2022 20:27:26

64QAM

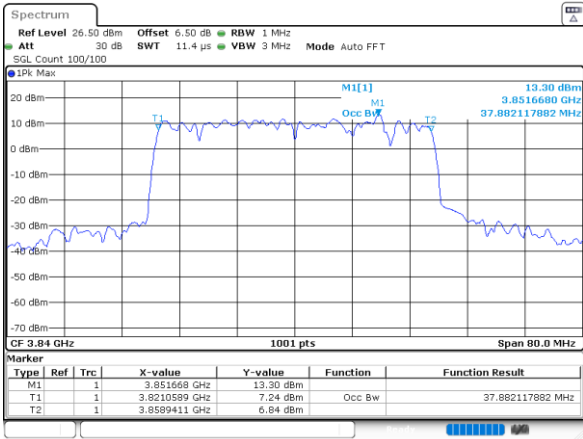

Date: 20_DEC.2022 20:27:47

256QAM

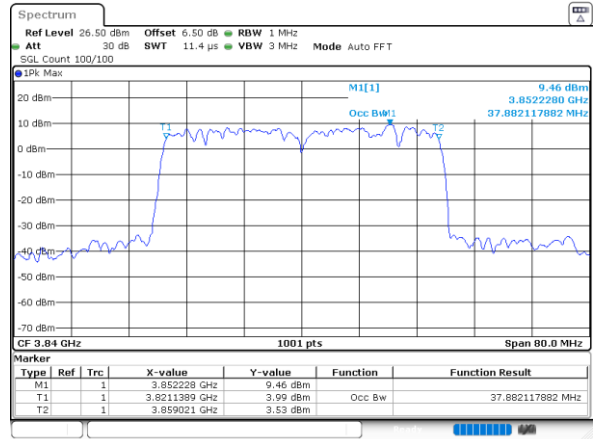


Date: 20_DEC.2022 20:28:05




50MHz CP

QPSK

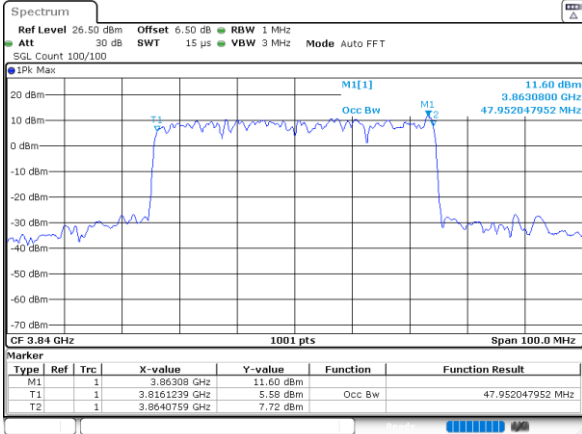


Date: 20_DEC.2022 20:25:31

16QAM

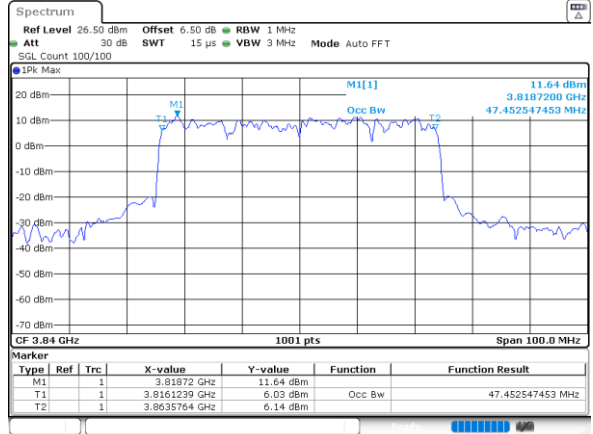


Date: 20_DEC.2022 20:25:51

64QAM

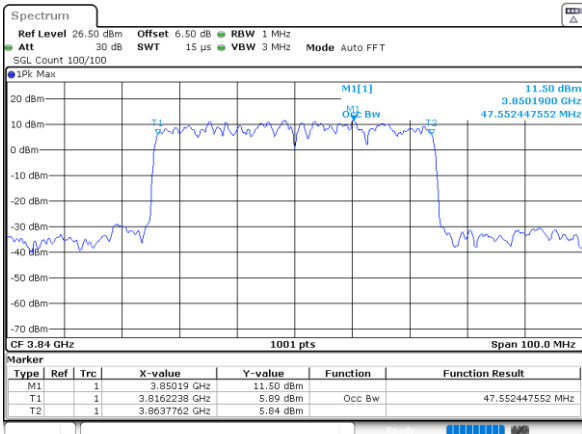

Date: 20_DEC.2022 20:26:08

256QAM

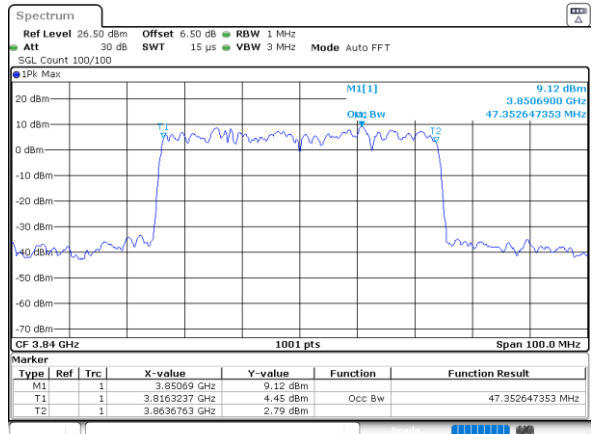


Date: 20_DEC.2022 20:26:25




60MHz CP

QPSK

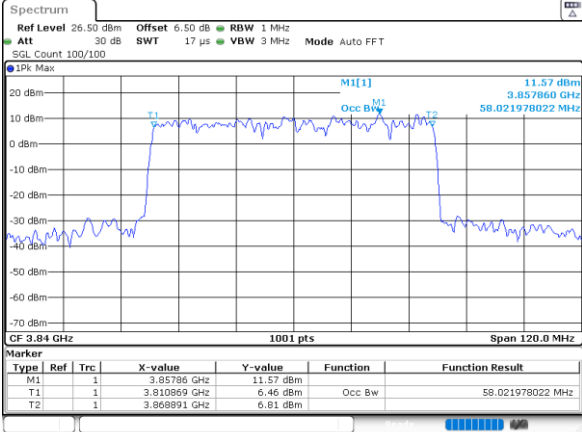


Date: 20_DEC.2022 20:22:38

16QAM

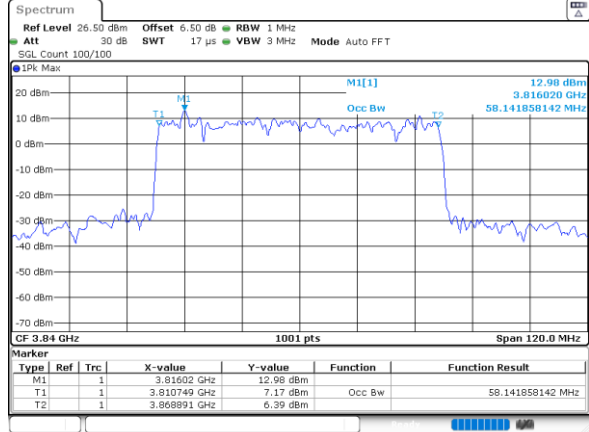


Date: 20_DEC.2022 20:22:57

64QAM

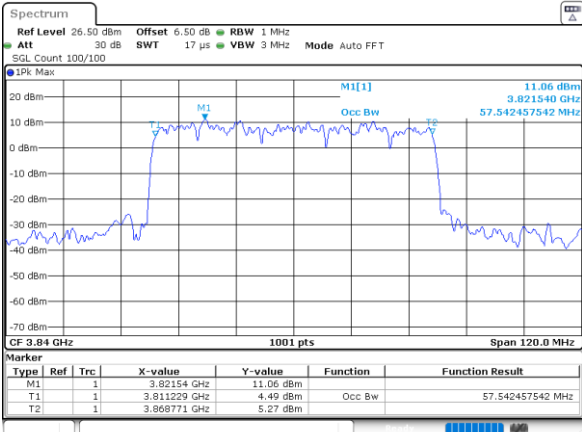

Date: 20_DEC.2022 20:23:13

256QAM

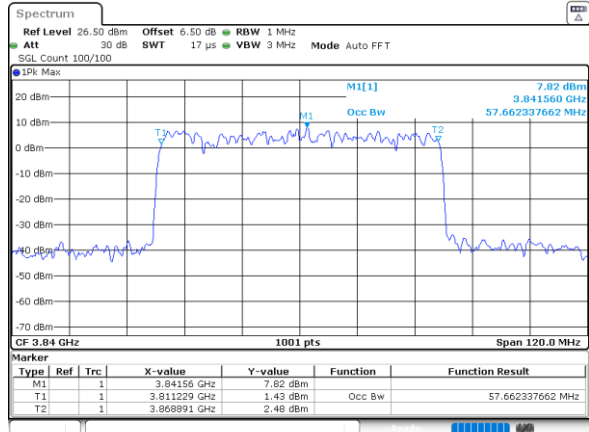


Date: 20_DEC.2022 20:23:31




70MHz CP

QPSK

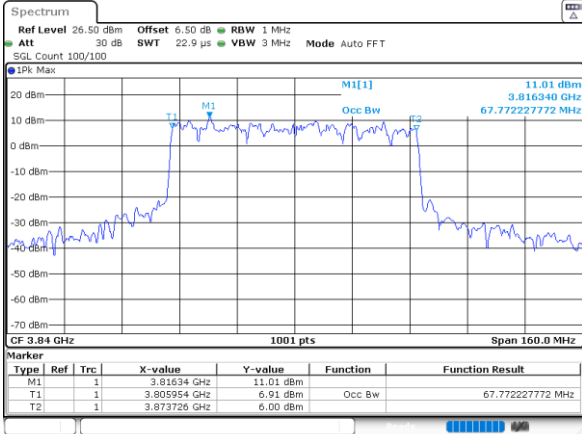


Date: 20_DEC.2022 20:20:57

16QAM

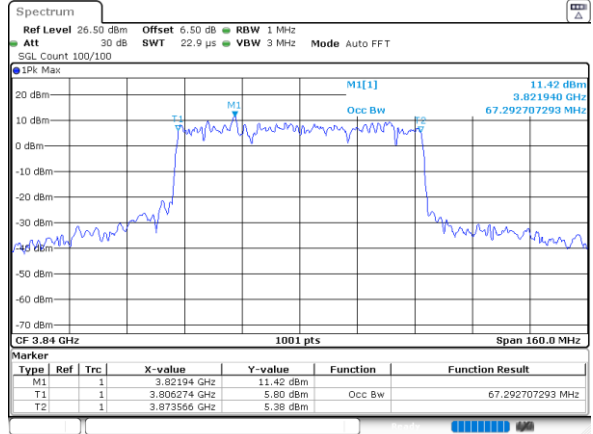


Date: 20_DEC.2022 20:21:15

64QAM

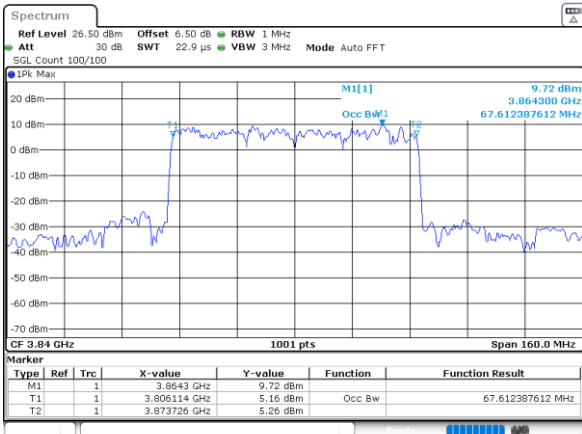

Date: 20_DEC.2022 20:21:32

256QAM

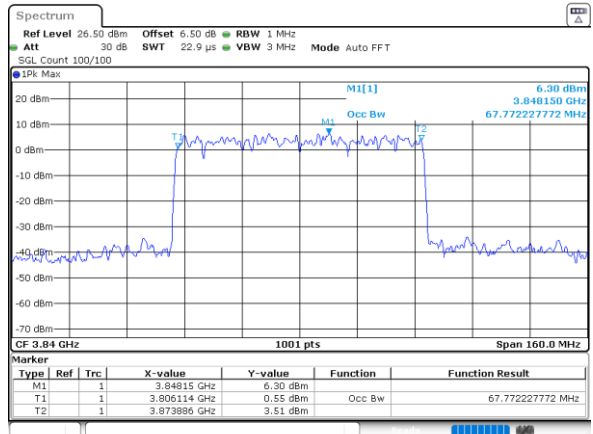


Date: 20_DEC.2022 20:21:52




80MHz CP

QPSK

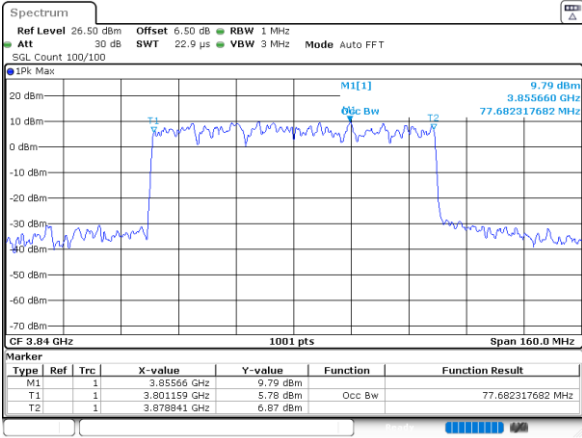


Date: 20_DEC.2022 20:19:29

16QAM

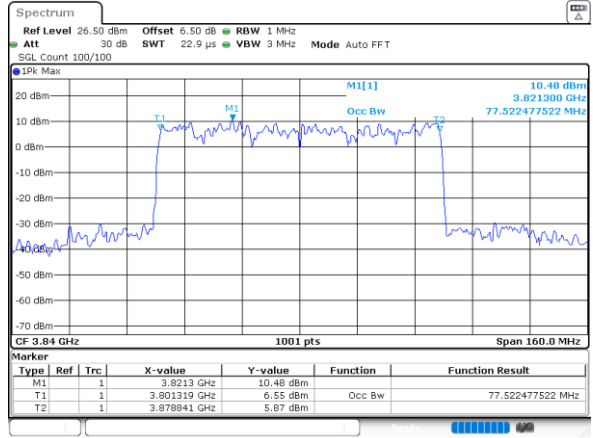


Date: 20_DEC.2022 20:19:48

64QAM

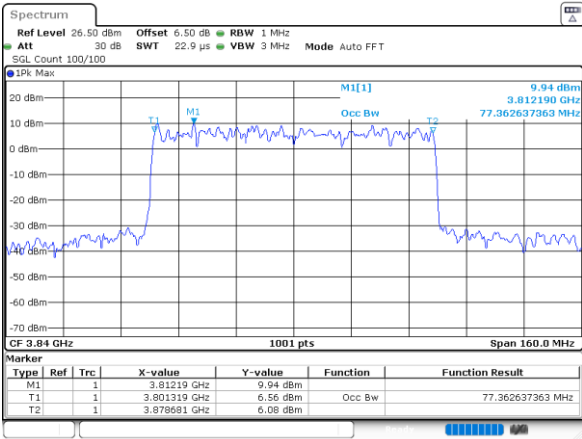


Date: 20_DEC.2022 20:20:08

256QAM

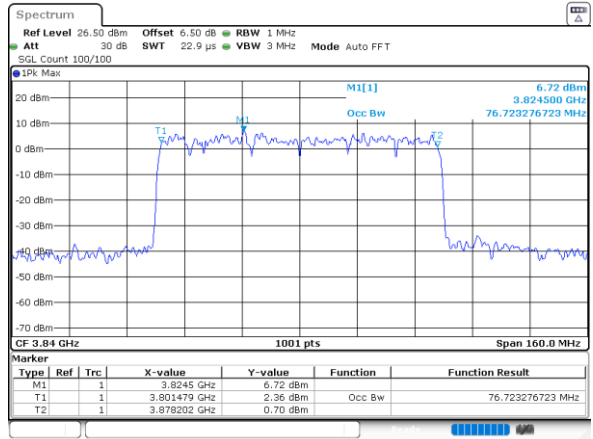


Date: 20_DEC.2022 20:20:26

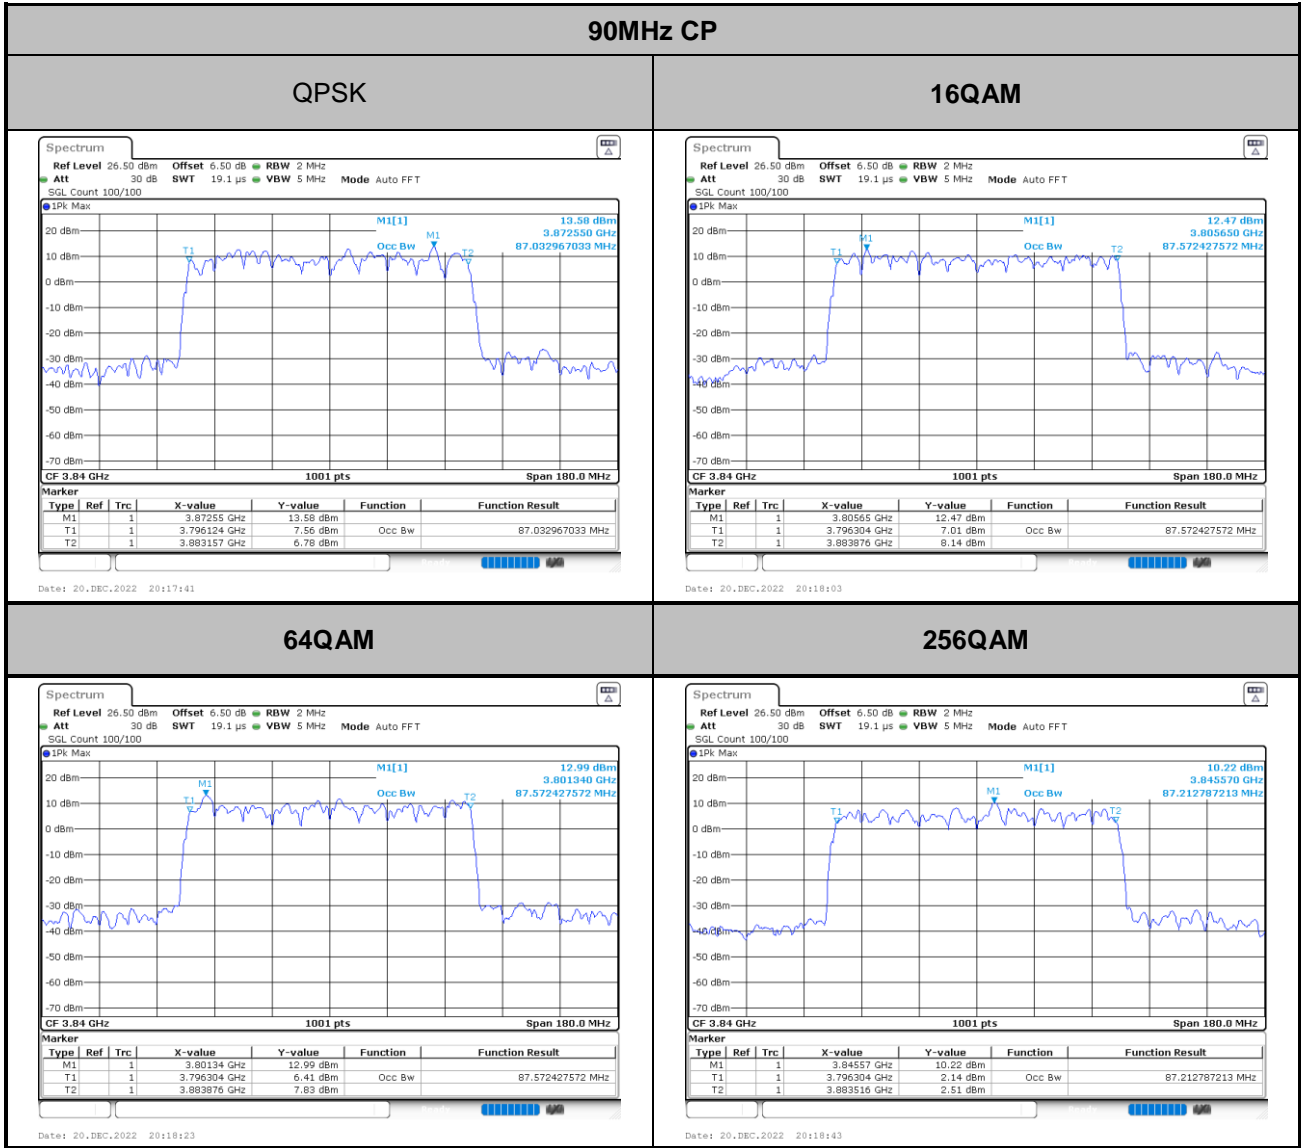




100MHz CP

QPSK

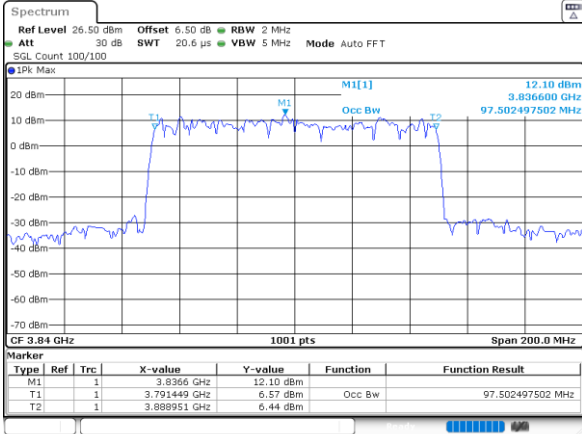


Date: 20_DEC.2022 20:16:12

16QAM

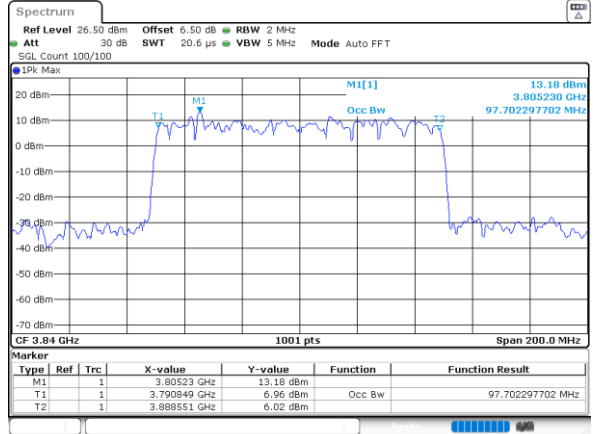


Date: 20_DEC.2022 20:16:35

64QAM

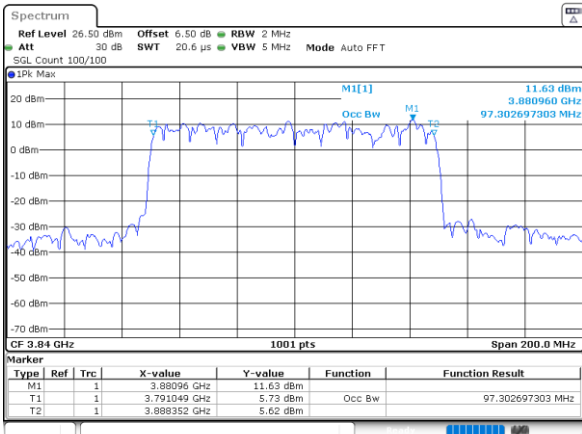

Date: 20_DEC.2022 20:16:54


256QAM

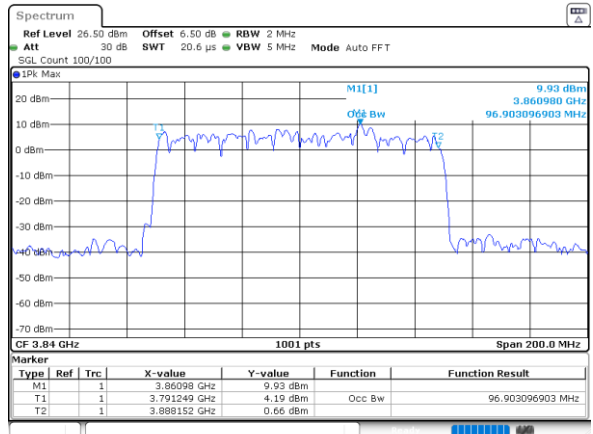

Date: 20_DEC.2022 20:17:13



Conducted Band Edge


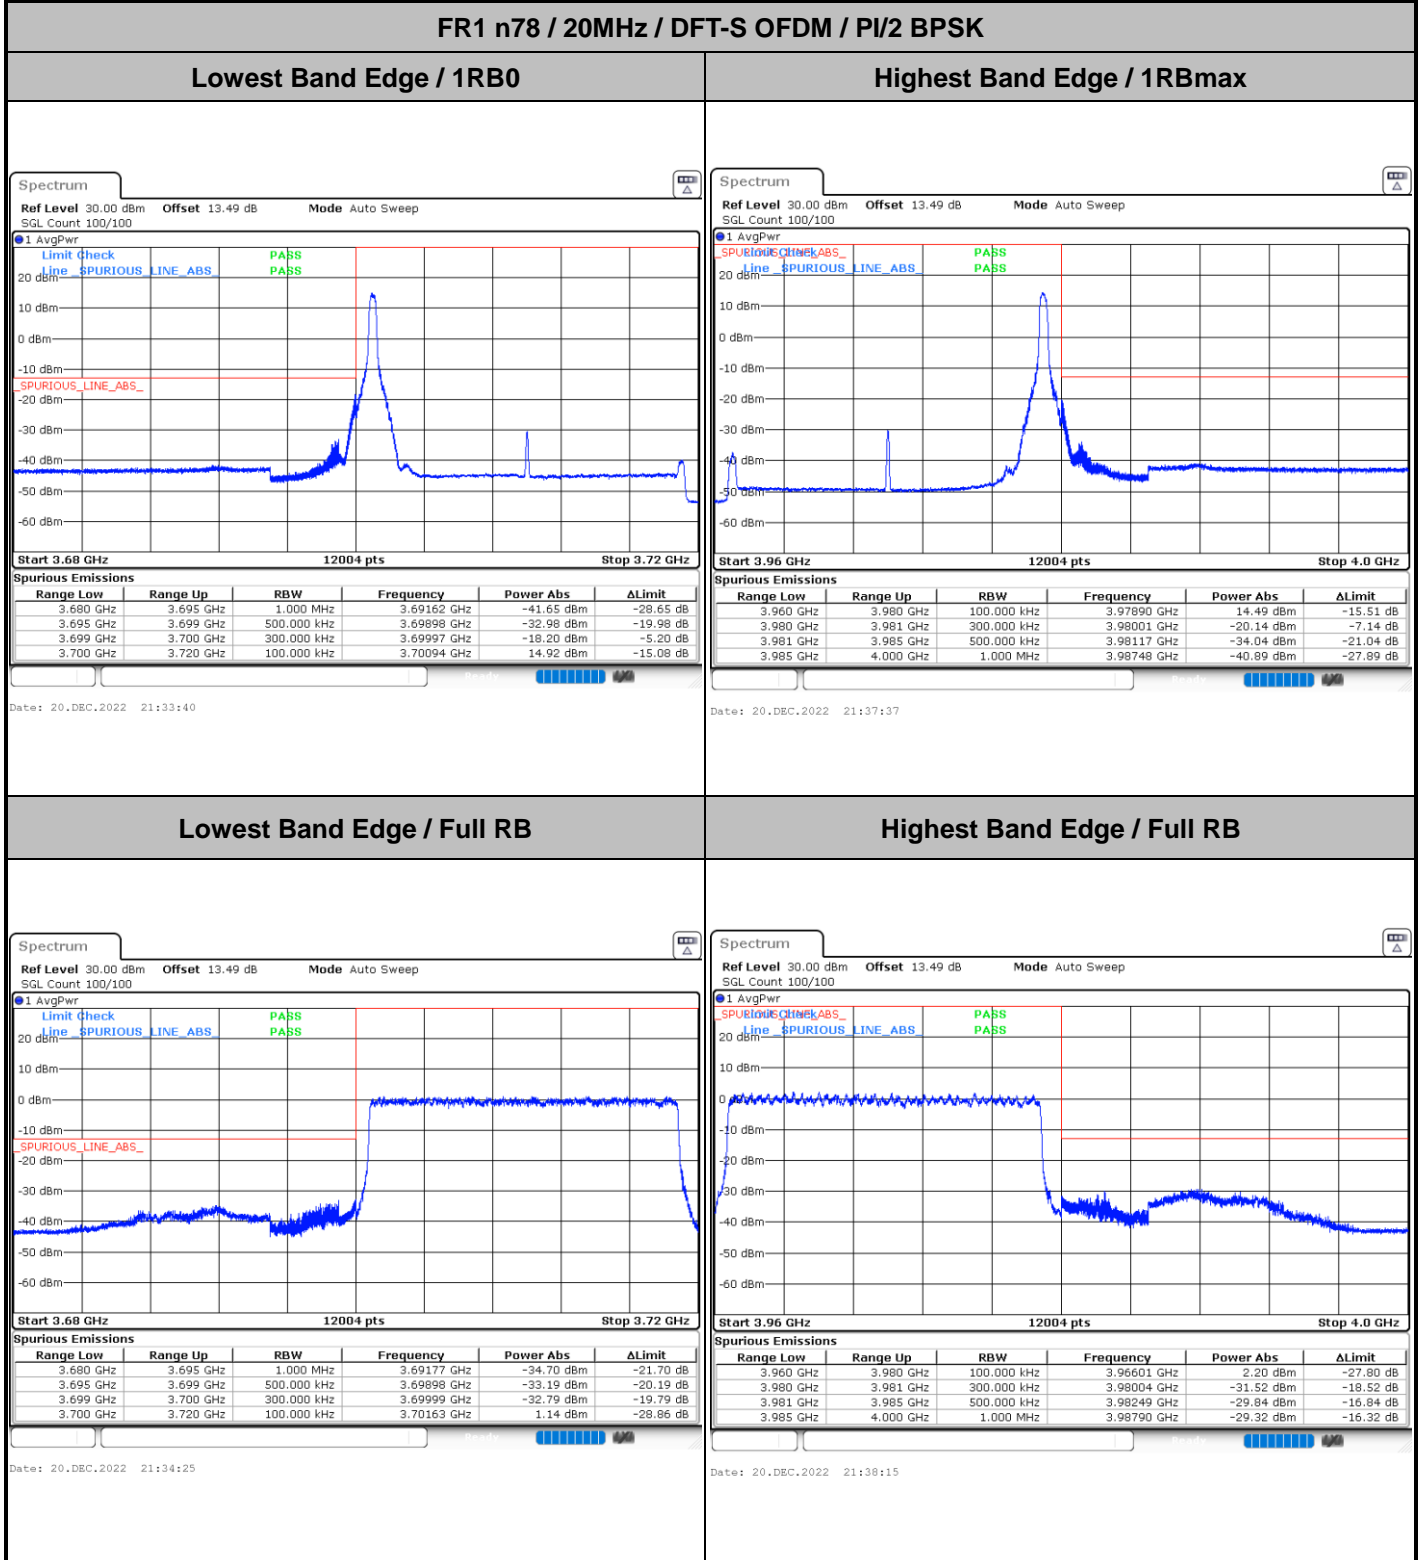




FR1 n78 / 20MHz / DFT-S OFDM / QPSK

Lowest Band Edge / 1RB0

Highest Band Edge / 1RBmax

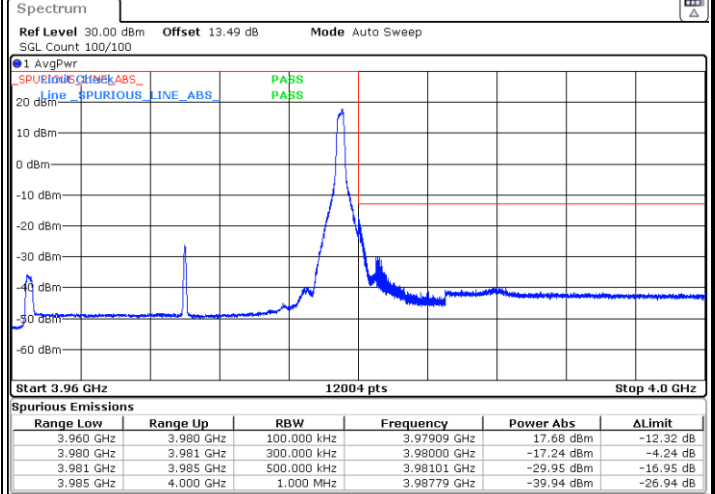
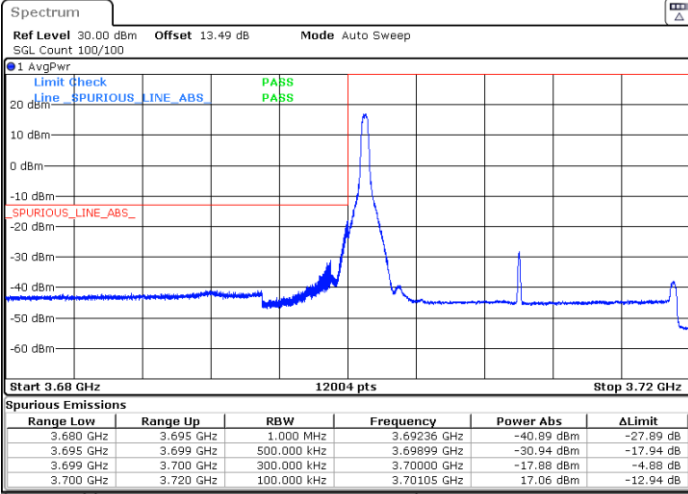


Date: 20.DEC.2022 21:33:03

Date: 20.DEC.2022 21:36:55

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

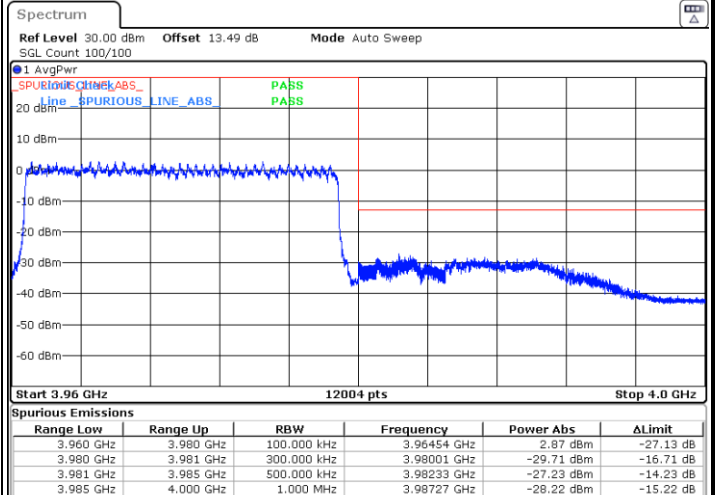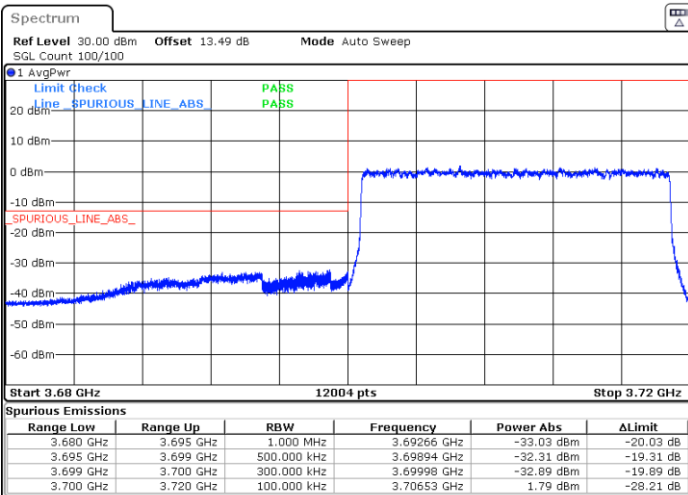

Date: 20.DEC.2022 21:35:14



Date: 20.DEC.2022 21:39:00



FR1 n78 / 60MHz / DFT-S OFDM / PI/2 BPSK

Lowest Band Edge / 1RB0

Highest Band Edge / 1RBmax

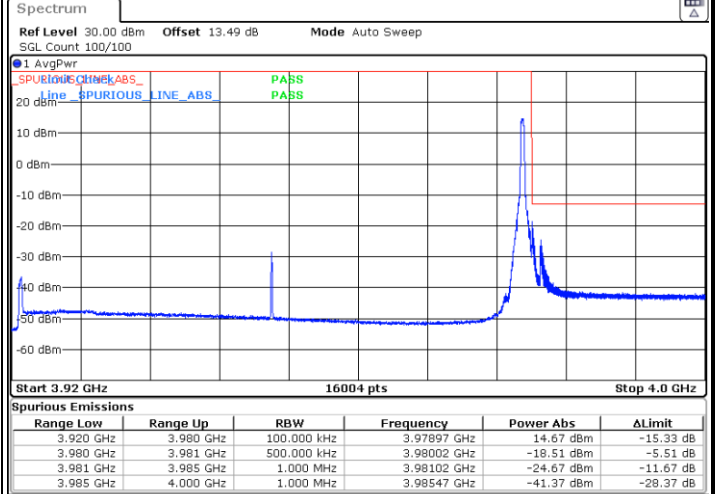
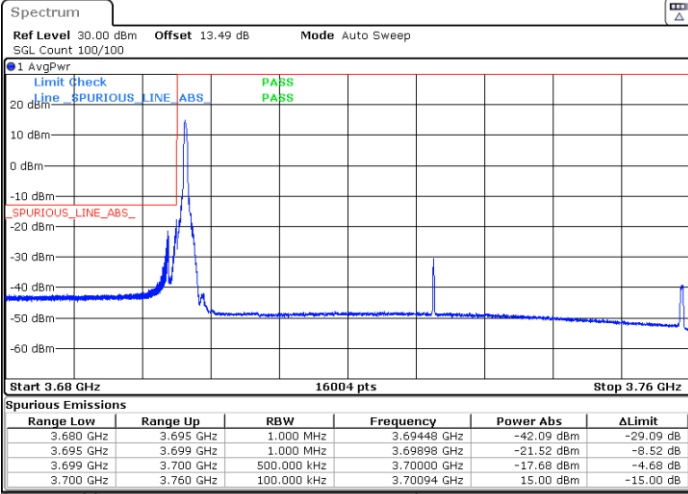


Date: 20.DEC.2022 21:14:19

Date: 20.DEC.2022 21:29:39

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

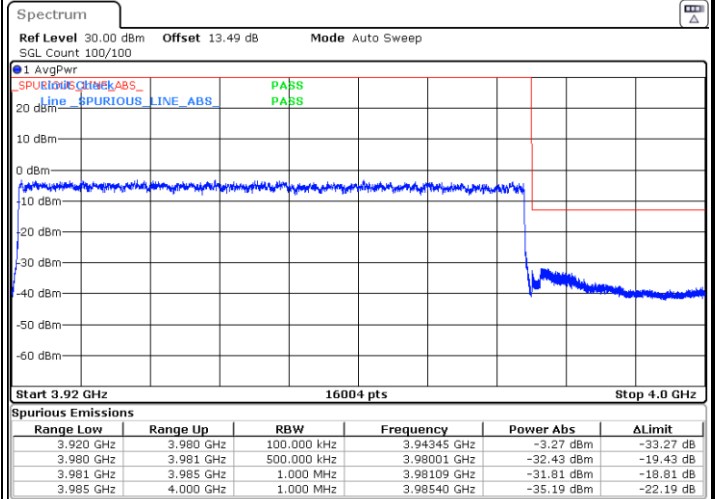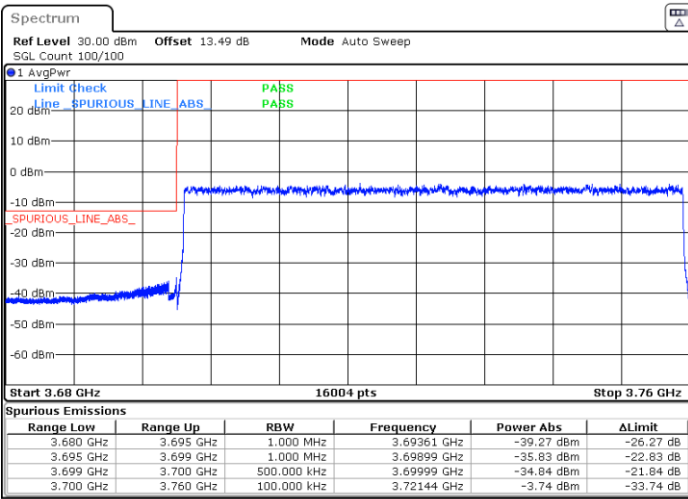

Date: 20.DEC.2022 21:15:28



Date: 20.DEC.2022 21:30:24



FR1 n78 / 60MHz / DFT-S OFDM / QPSK

Lowest Band Edge / 1RB0

Highest Band Edge / 1RBmax

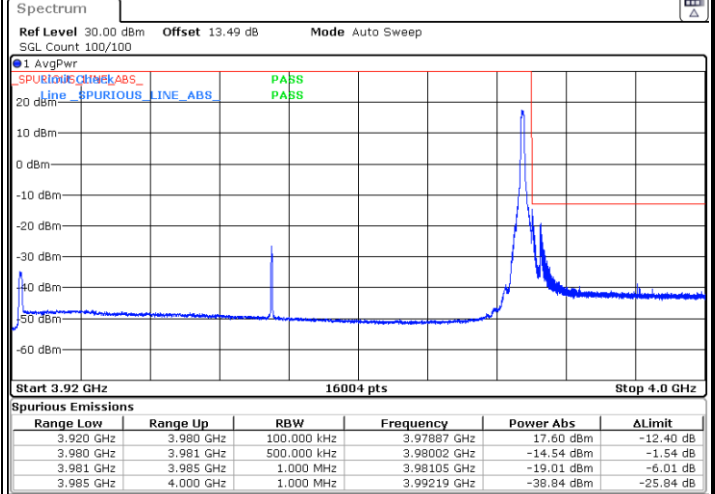
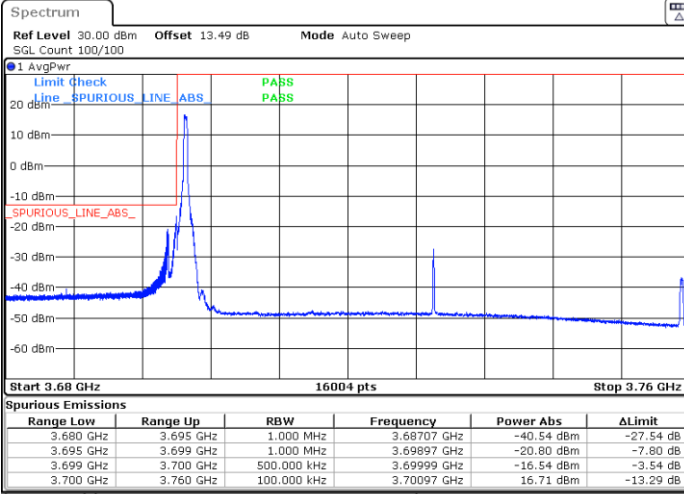


Date: 20.DEC.2022 21:13:22

Date: 20.DEC.2022 21:28:41

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

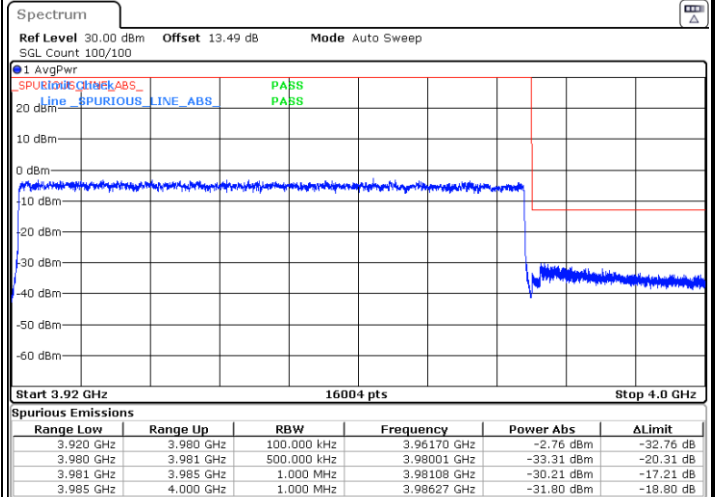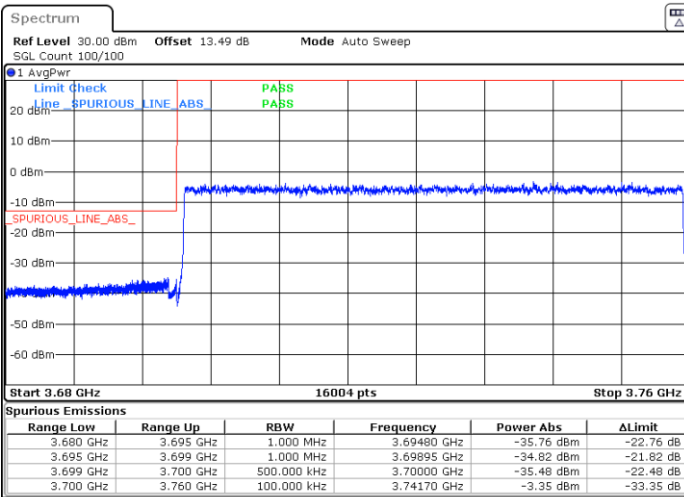

Date: 20.DEC.2022 21:26:30



Date: 20.DEC.2022 21:31:36



FR1 n78 / 100MHz / DFT-S OFDM / PI/2 BPSK

Lowest Band Edge / 1RB0

Highest Band Edge / 1RBmax

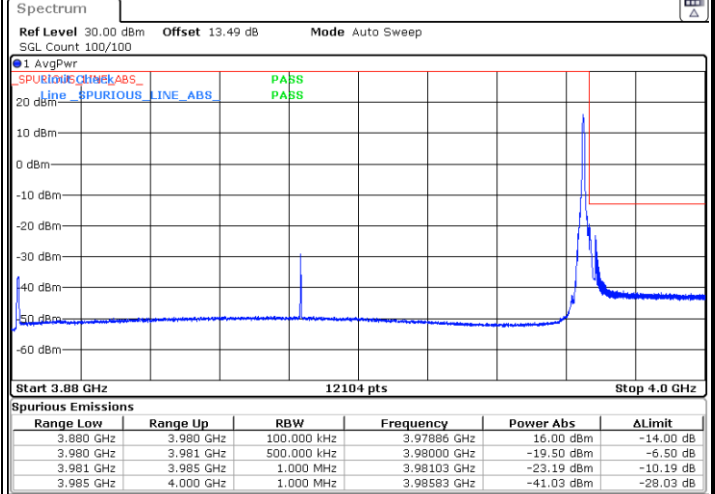
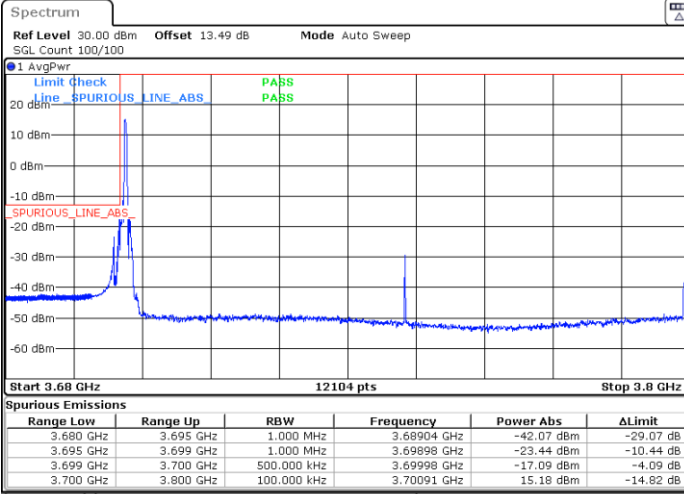


Date: 20.DEC.2022 21:07:08

Date: 20.DEC.2022 21:10:53

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

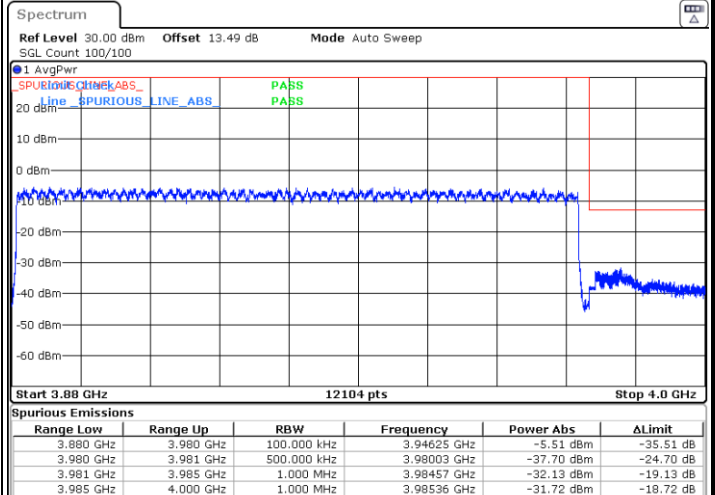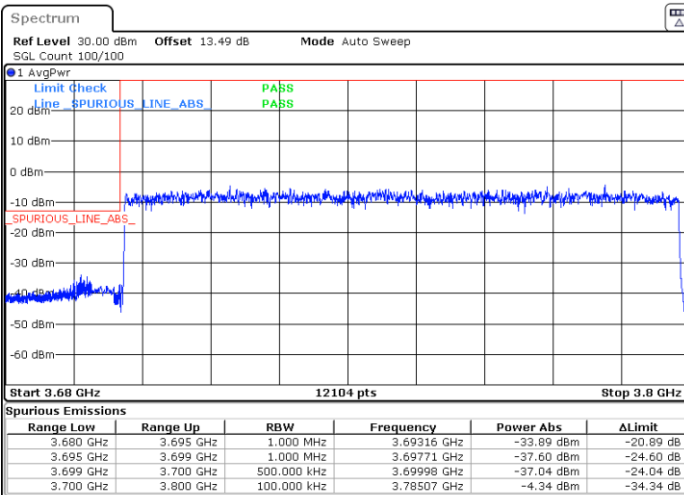

Date: 20.DEC.2022 21:07:51


Date: 20.DEC.2022 21:10:07




FR1 n78 / 100MHz / DFT-S OFDM / QPSK

Lowest Band Edge / 1RB0

Highest Band Edge / 1RBmax

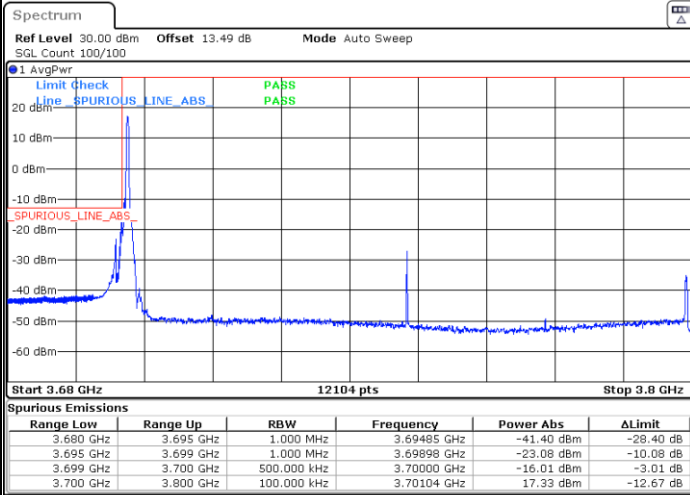


Date: 20.DEC.2022 21:06:11

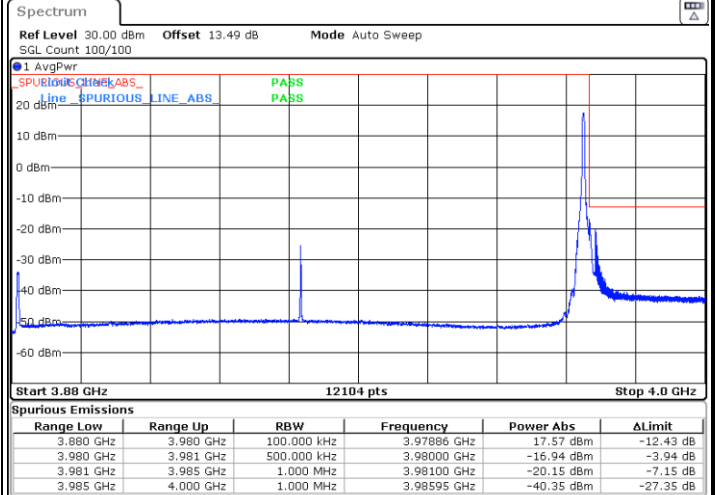


Date: 20.DEC.2022 21:11:52

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

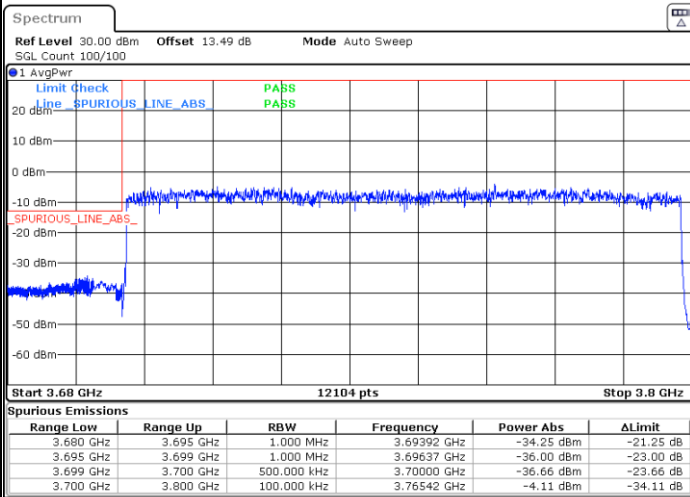

Date: 20.DEC.2022 21:08:27

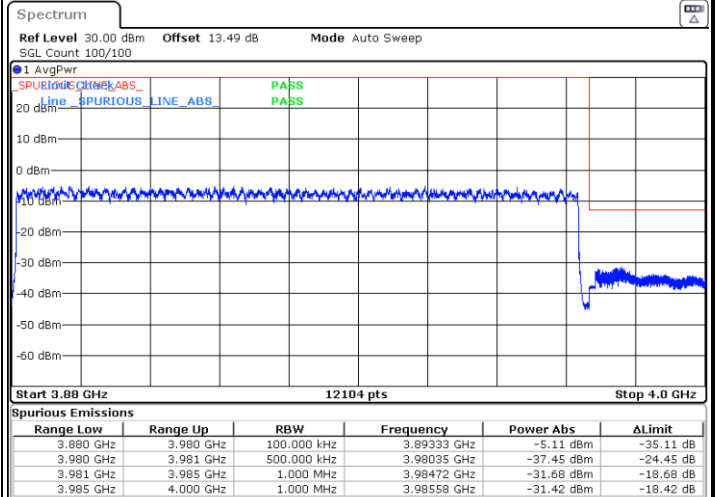

Date: 20.DEC.2022 21:09:12