




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Wang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

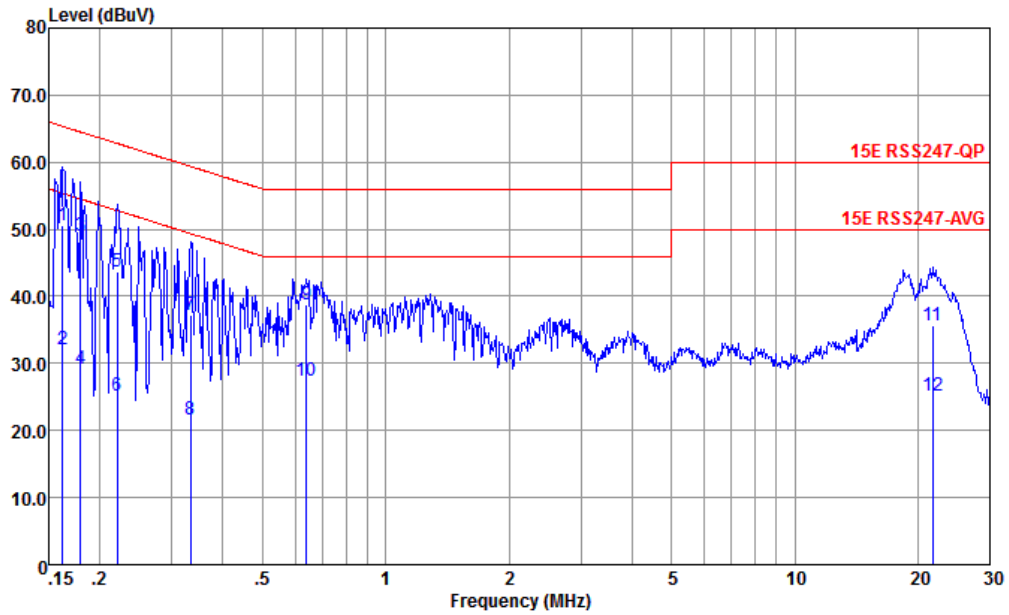


Site : CO01-KS
 Condition : 15E RSS247-QP LISN-060105-LINE LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1 *	0.162	50.68	-14.66	65.34	40.19	0.06	10.43	QP
2	0.162	32.08	-23.26	55.34	21.59	0.06	10.43	Average
3	0.180	48.96	-15.54	64.50	38.50	0.04	10.42	QP
4	0.180	29.26	-25.24	54.50	18.80	0.04	10.42	Average
5	0.221	43.63	-19.16	62.79	33.20	0.03	10.40	QP
6	0.221	25.23	-27.56	52.79	14.80	0.03	10.40	Average
7	0.334	37.17	-22.18	59.35	26.80	0.04	10.33	QP
8	0.334	21.57	-27.78	49.35	11.20	0.04	10.33	Average
9	0.641	38.70	-17.30	56.00	28.60	-0.07	10.17	QP
10	0.641	27.30	-18.70	46.00	17.20	-0.07	10.17	Average
11	21.715	35.67	-24.33	60.00	24.61	-0.33	11.39	QP
12	21.715	25.27	-24.73	50.00	14.21	-0.33	11.39	Average



Test Engineer :	Amos Wang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

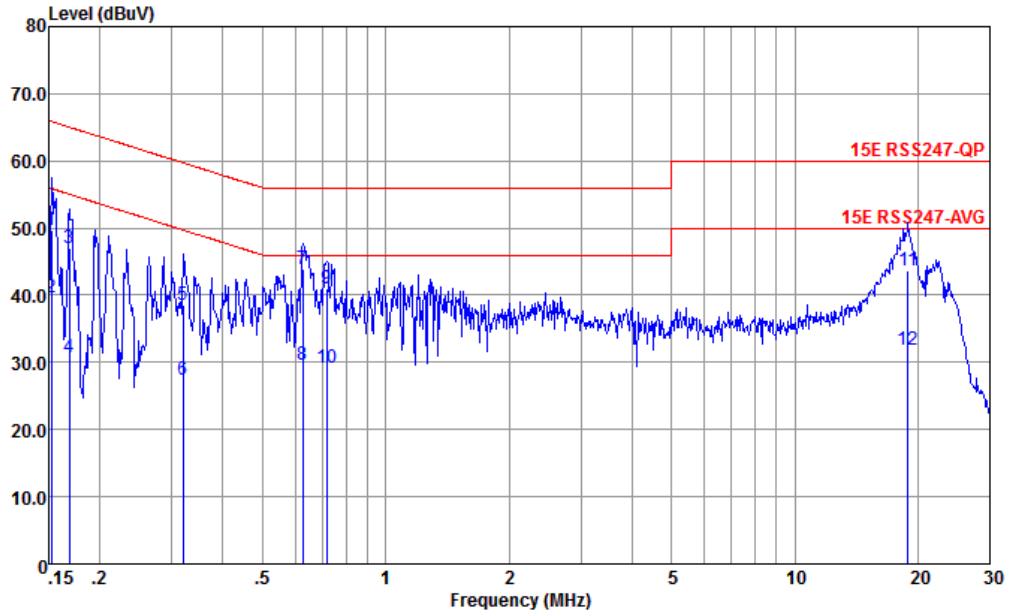

Site : CO01-KS
 Condition : 15E RSS247-QP LISN-060105-NEUTRAL NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.152	49.76	-16.11	65.87	39.30	0.03	10.43	QP
2	0.152	39.66	-16.21	55.87	29.20	0.03	10.43	Average
3	0.169	46.96	-18.07	65.03	36.49	0.04	10.43	QP
4	0.169	30.76	-24.27	55.03	20.29	0.04	10.43	Average
5	0.320	38.48	-21.23	59.71	28.19	-0.05	10.34	QP
6	0.320	27.48	-22.23	49.71	17.19	-0.05	10.34	Average
7 *	0.627	43.99	-12.01	56.00	33.90	-0.09	10.18	QP
8	0.627	29.69	-16.31	46.00	19.60	-0.09	10.18	Average
9	0.716	40.97	-15.03	56.00	30.90	-0.09	10.16	QP
10	0.716	29.27	-16.73	46.00	19.20	-0.09	10.16	Average
11	18.920	43.64	-16.36	60.00	32.60	-0.27	11.31	QP
12	18.920	31.94	-18.06	50.00	20.90	-0.27	11.31	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Test Engineer :	Carry Xu	Relative Humidity :	41 ~ 42 %
		Temperature :	22 ~ 23 °C

<U NII-1, 2A, 2C>

Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-1	5.15-5.25	4	802.11a	36	5180	6Mbps	-	-
Mode 2	U-NII-1	5.15-5.25	4	802.11a	44	5220	6Mbps	-	-
Mode 3	U-NII-1	5.15-5.25	4	802.11a	48	5240	6Mbps	-	-
Mode 4	U-NII-2A	5.25-5.35	4	802.11a	52	5260	6Mbps	-	-
Mode 5	U-NII-2A	5.25-5.35	4	802.11a	60	5300	6Mbps	-	-
Mode 6	U-NII-2A	5.25-5.35	4	802.11a	64	5320	6Mbps	-	-
Mode 7	U-NII-2C	5.47-5.725	4	802.11a	100	5500	6Mbps	-	-
Mode 8	U-NII-2C	5.47-5.725	4	802.11a	116	5580	6Mbps	-	-
Mode 9	U-NII-2C	5.47-5.725	4	802.11a	140	5700	6Mbps	-	-
Mode 10	U-NII-1	5.15-5.25	4	802.11ac VHT20	36	5180	MCS0	-	-
Mode 11	U-NII-1	5.15-5.25	4	802.11ac VHT20	44	5220	MCS0	-	-



Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 12	U-NII-1	5.15-5.25	4	802.11ac VHT20	48	5240	MCS0	-	-
Mode 13	U-NII-2A	5.25-5.35	4	802.11ac VHT20	52	5260	MCS0	-	-
Mode 14	U-NII-2A	5.25-5.35	4	802.11ac VHT20	60	5300	MCS0	-	-
Mode 15	U-NII-2A	5.25-5.35	4	802.11ac VHT20	64	5320	MCS0	-	-
Mode 16	U-NII-2C	5.47-5.725	4	802.11ac VHT20	100	5500	MCS0	-	-
Mode 17	U-NII-2C	5.47-5.725	4	802.11ac VHT20	116	5580	MCS0	-	-
Mode 18	U-NII-2C	5.47-5.725	4	802.11ac VHT20	140	5700	MCS0	-	-
Mode 19	U-NII-1	5.15-5.25	4	802.11ac VHT40	38	5190	MCS0	-	-
Mode 20	U-NII-1	5.15-5.25	4	802.11ac VHT40	46	5230	MCS0	-	-
Mode 21	U-NII-2A	5.25-5.35	4	802.11ac VHT40	54	5270	MCS0	-	-
Mode 22	U-NII-2A	5.25-5.35	4	802.11ac VHT40	62	5310	MCS0	-	-



Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 23	U-NII-2C	5.47-5.725	4	802.11ac VHT40	102	5510	MCS0	-	-
Mode 24	U-NII-2C	5.47-5.725	4	802.11ac VHT40	110	5550	MCS0	-	-
Mode 25	U-NII-2C	5.47-5.725	4	802.11ac VHT40	134	5670	MCS0	-	-
Mode 26	U-NII-1	5.15-5.25	4	802.11ac VHT80	42	5210	MCS0	-	-
Mode 27	U-NII-2A	5.25-5.35	4	802.11ac VHT80	58	5290	MCS0	-	-
Mode 28	U-NII-2C	5.47-5.725	4	802.11ac VHT80	106	5530	MCS0	-	-
Mode 38	U-NII-2C-3	5.47-5.85	4	802.11a	144	5720	6Mbps	-	-
Mode 39	U-NII-2C-3	5.47-5.85	4	802.11ac VHT20	144	5720	MCS0	-	-
Mode 40	U-NII-2C-3	5.47-5.85	4	802.11ac VHT40	142	5710	MCS0	-	-
Mode 41	U-NII-2C-3	5.47-5.85	4	802.11ac VHT80	138	5690	MCS0	-	-
Mode 42	U-NII-2C	5.47-5.725	4	802.11ac VHT40	102	5510	MCS0	-	LF



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11a	36	5149.90	47.60	54.00	-6.40	H	AVERAGE	Pass	Band Edge
2	802.11a	44	10440.00	46.21	68.30	-22.09	H	PEAK	Pass	Harmonic
3	802.11a	48	10480.00	45.90	68.30	-22.40	H	PEAK	Pass	Harmonic
4	802.11a	52	10520.00	45.74	68.30	-22.56	V	PEAK	Pass	Harmonic
5	802.11a	60	10600.00	33.22	54.00	-20.78	V	AVERAGE	Pass	Harmonic
6	802.11a	64	5350.24	45.44	54.00	-8.56	H	AVERAGE	Pass	Band Edge
7	802.11a	100	5469.40	64.54	68.30	-3.76	H	PEAK	Pass	Band Edge
8	802.11a	116	11160.00	46.78	74.00	-27.22	V	PEAK	Pass	Harmonic
9	802.11a	140	5725.61	62.06	68.30	-6.24	H	PEAK	Pass	Band Edge
10	802.11ac VHT20	36	5150.00	50.75	54.00	-3.25	H	AVERAGE	Pass	Band Edge
11	802.11ac VHT20	44	10440.00	46.68	68.30	-21.62	V	PEAK	Pass	Harmonic



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
12	802.11ac VHT20	48	10480.00	46.49	68.30	-21.81	V	PEAK	Pass	Harmonic
13	802.11ac VHT20	52	10520.00	45.42	68.30	-22.88	H	PEAK	Pass	Harmonic
14	802.11ac VHT20	60	10600.00	45.74	74.00	-28.26	H	PEAK	Pass	Harmonic
15	802.11ac VHT20	64	5350.10	45.62	54.00	-8.38	H	AVERAGE	Pass	Band Edge
16	802.11ac VHT20	100	5470.00	62.25	68.30	-6.05	V	PEAK	Pass	Band Edge
17	802.11ac VHT20	116	11160.00	46.31	74.00	-27.69	V	PEAK	Pass	Harmonic
18	802.11ac VHT20	140	5727.43	64.29	68.30	-4.01	H	PEAK	Pass	Band Edge
19	802.11ac VHT40	38	5150.00	48.56	54.00	-5.44	H	AVERAGE	Pass	Band Edge
20	802.11ac VHT40	46	5147.43	42.55	54.00	-11.45	H	AVERAGE	Pass	Band Edge
21	802.11ac VHT40	54	5353.03	42.18	54.00	-11.82	H	AVERAGE	Pass	Band Edge
22	802.11ac VHT40	62	5350.05	44.90	54.00	-9.10	H	AVERAGE	Pass	Band Edge







Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
23	802.11ac VHT40	102	5466.48	65.14	68.30	-3.16	H	PEAK	Pass	Band Edge
24	802.11ac VHT40	110	5459.80	42.45	54.00	-11.55	H	AVERAGE	Pass	Band Edge
25	802.11ac VHT40	134	5725.01	62.42	68.30	-5.88	H	PEAK	Pass	Band Edge
26	802.11ac VHT80	42	5149.73	49.94	54.00	-4.06	H	AVERAGE	Pass	Band Edge
27	802.11ac VHT80	58	5350.18	47.27	54.00	-6.73	H	AVERAGE	Pass	Band Edge
28	802.11ac VHT80	106	5468.80	63.30	68.30	-5.00	H	PEAK	Pass	Band Edge
38	802.11a	144	11440.00	47.39	74.00	-26.61	V	PEAK	Pass	Harmonic
39	802.11ac VHT20	144	11440.00	46.36	74.00	-27.64	V	PEAK	Pass	Harmonic
40	802.11ac VHT40	142	11420.00	46.70	74.00	-27.30	H	PEAK	Pass	Harmonic
41	802.11ac VHT80	138	11380.00	46.25	74.00	-27.75	V	PEAK	Pass	Harmonic
42	802.11ac VHT40	102	36.79	25.39	40	-14.61	V	PEAK	Pass	LF



	1																																																																																											
Mode	Band Edge																																																																																											
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																											
ANT	4																																																																																											
Pol.	Horizontal	Fundamental																																																																																										
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5149.60</td> <td>66.75</td> <td>74.00</td> <td>-7.25</td> <td>54.65</td> <td>34.62</td> <td>10.62</td> <td>33.14</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>100 238 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5149.60	66.75	74.00	-7.25	54.65	34.62	10.62	33.14	0.00									100 238 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5180.00</td> <td>105.49</td> <td>-----</td> <td>-----</td> <td>93.35</td> <td>34.64</td> <td>10.63</td> <td>33.13</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>100 238 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5180.00	105.49	-----	-----	93.35	34.64	10.63	33.13	0.00									100 238 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																				
1 5149.60	66.75	74.00	-7.25	54.65	34.62	10.62	33.14	0.00																																																																																				
								100 238 PEAK																																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																				
1 5180.00	105.49	-----	-----	93.35	34.64	10.63	33.13	0.00																																																																																				
								100 238 PEAK																																																																																				
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5149.90</td> <td>47.60</td> <td>54.00</td> <td>-6.40</td> <td>35.50</td> <td>34.62</td> <td>10.62</td> <td>33.14</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>100 238 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5149.90	47.60	54.00	-6.40	35.50	34.62	10.62	33.14	0.00									100 238 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5180.00</td> <td>97.12</td> <td>-----</td> <td>-----</td> <td>84.97</td> <td>34.65</td> <td>10.63</td> <td>33.13</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>100 238 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5180.00	97.12	-----	-----	84.97	34.65	10.63	33.13	0.00									100 238 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																				
1 5149.90	47.60	54.00	-6.40	35.50	34.62	10.62	33.14	0.00																																																																																				
								100 238 AVERAGE																																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																				
1 5180.00	97.12	-----	-----	84.97	34.65	10.63	33.13	0.00																																																																																				
								100 238 AVERAGE																																																																																				

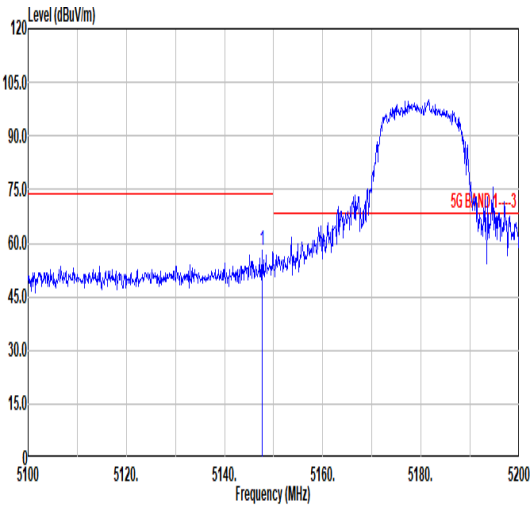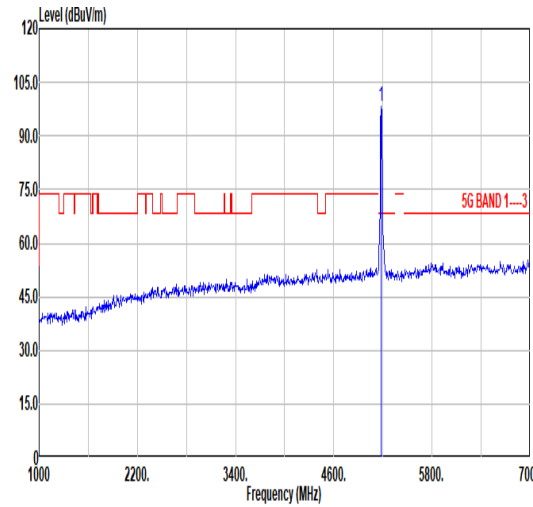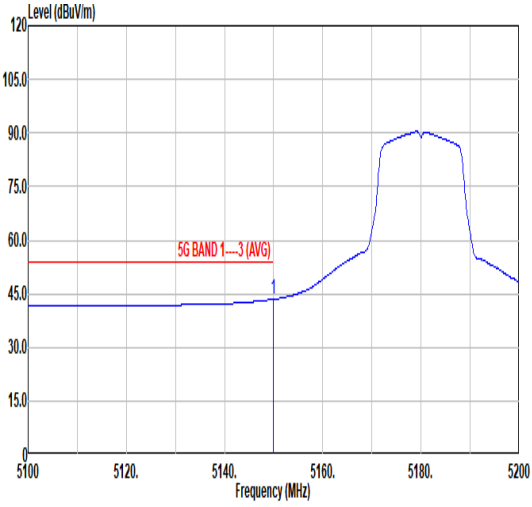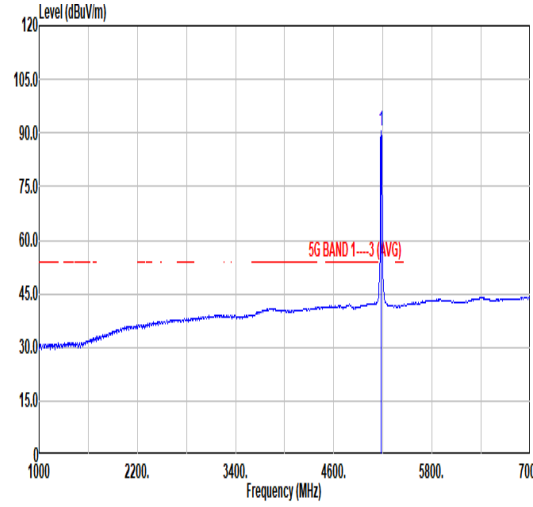

	1																																																																															
Mode	Band Edge																																																																															
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																															
ANT	4																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	 <p>Level (dBuVm) vs Frequency (MHz) plot for Vertical polarization. The plot shows a signal peak at 5180 MHz reaching approximately 100 dBuVm. A red limit line is shown at 75 dBuVm. The x-axis ranges from 5100 to 5200 MHz, and the y-axis ranges from 0 to 120 dBuVm.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5147.60</td> <td>57.90</td> <td>74.00</td> <td>-16.10</td> <td>45.80</td> <td>34.62</td> <td>10.62</td> <td>33.14</td> <td>0.00</td> <td>100</td> <td>26 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5147.60	57.90	74.00	-16.10	45.80	34.62	10.62	33.14	0.00	100	26 PEAK	 <p>Level (dBuVm) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a sharp signal peak at 5180 MHz reaching approximately 100 dBuVm. A red limit line is shown at 75 dBuVm. The x-axis ranges from 1000 to 7000 MHz, and the y-axis ranges from 0 to 120 dBuVm.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5180.00</td> <td>98.40</td> <td>-----</td> <td>-----</td> <td>86.25</td> <td>34.65</td> <td>10.63</td> <td>33.13</td> <td>0.00</td> <td>100</td> <td>26 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5180.00	98.40	-----	-----	86.25	34.65	10.63	33.13	0.00	100	26 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5147.60	57.90	74.00	-16.10	45.80	34.62	10.62	33.14	0.00	100	26 PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5180.00	98.40	-----	-----	86.25	34.65	10.63	33.13	0.00	100	26 PEAK																																																																						
Avg	 <p>Level (dBuVm) vs Frequency (MHz) plot for Vertical polarization, Average mode. The plot shows a signal peak at 5180 MHz reaching approximately 90 dBuVm. A red limit line is shown at 55 dBuVm. The x-axis ranges from 5100 to 5200 MHz, and the y-axis ranges from 0 to 120 dBuVm.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5150.00</td> <td>43.48</td> <td>54.00</td> <td>-10.52</td> <td>31.38</td> <td>34.62</td> <td>10.62</td> <td>33.14</td> <td>0.00</td> <td>100</td> <td>26 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5150.00	43.48	54.00	-10.52	31.38	34.62	10.62	33.14	0.00	100	26 AVERAGE	 <p>Level (dBuVm) vs Frequency (MHz) plot for Fundamental polarization, Average mode. The plot shows a sharp signal peak at 5180 MHz reaching approximately 90 dBuVm. A red limit line is shown at 55 dBuVm. The x-axis ranges from 1000 to 7000 MHz, and the y-axis ranges from 0 to 120 dBuVm.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5180.00</td> <td>90.52</td> <td>-----</td> <td>-----</td> <td>78.37</td> <td>34.65</td> <td>10.63</td> <td>33.13</td> <td>0.00</td> <td>100</td> <td>26 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5180.00	90.52	-----	-----	78.37	34.65	10.63	33.13	0.00	100	26 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5150.00	43.48	54.00	-10.52	31.38	34.62	10.62	33.14	0.00	100	26 AVERAGE																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5180.00	90.52	-----	-----	78.37	34.65	10.63	33.13	0.00	100	26 AVERAGE																																																																						



	1																																																																																					
Mode	Harmonic																																																																																					
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																					
ANT	4																																																																																					
Pol.	Horizontal	Vertical																																																																																				
Peak	<p>Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a blue signal line fluctuating around 45 dBuV/m, with a red stepped limit line labeled '5G BAND 1-3' and a red dashed average line labeled '5G BAND 1-3 (AVG)'. A vertical blue line is present at approximately 10360 MHz.</p>	<p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows a blue signal line fluctuating around 45 dBuV/m, with a red stepped limit line labeled '5G BAND 1-3' and a red dashed average line labeled '5G BAND 1-3 (AVG)'. A vertical blue line is present at approximately 10360 MHz.</p>																																																																																				
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10360.00</td> <td>45.73</td> <td>68.30</td> <td>-22.57</td> <td>58.61</td> <td>38.05</td> <td>15.55</td> <td>66.48</td> <td>0.00</td> <td>300</td> <td>360 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 10360.00	45.73	68.30	-22.57	58.61	38.05	15.55	66.48	0.00	300	360 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10360.00</td> <td>44.58</td> <td>68.30</td> <td>-23.72</td> <td>57.46</td> <td>38.05</td> <td>15.55</td> <td>66.48</td> <td>0.00</td> <td>300</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 10360.00	44.58	68.30	-23.72	57.46	38.05	15.55	66.48	0.00	300	0 PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1 10360.00	45.73	68.30	-22.57	58.61	38.05	15.55	66.48	0.00	300	360 PEAK																																																																												
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1 10360.00	44.58	68.30	-23.72	57.46	38.05	15.55	66.48	0.00	300	0 PEAK																																																																												



Mode	2																																																																												
	Harmonic																																																																												
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																												
ANT	4																																																																												
Pol.	Horizontal	Vertical																																																																											
Peak Avg																																																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10440.00</td> <td>46.21</td> <td>68.30</td> <td>-22.09</td> <td>58.89</td> <td>38.11</td> <td>15.60</td> <td>66.39</td> <td>0.00</td> <td>100 360 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10440.00	46.21	68.30	-22.09	58.89	38.11	15.60	66.39	0.00	100 360 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10440.00</td> <td>45.20</td> <td>68.30</td> <td>-23.10</td> <td>57.88</td> <td>38.11</td> <td>15.60</td> <td>66.39</td> <td>0.00</td> <td>300 360 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10440.00	45.20	68.30	-23.10	57.88	38.11	15.60	66.39	0.00
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																				
1 10440.00	46.21	68.30	-22.09	58.89	38.11	15.60	66.39	0.00	100 360 PEAK																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																				
1 10440.00	45.20	68.30	-23.10	57.88	38.11	15.60	66.39	0.00	300 360 PEAK																																																																				



Mode	3																																																																													
	Harmonic																																																																													
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																													
ANT	4																																																																													
Pol.	Horizontal	Vertical																																																																												
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10488.00</td> <td>45.90</td> <td>68.30</td> <td>-22.40</td> <td>58.48</td> <td>38.14</td> <td>15.62</td> <td>66.34</td> <td>0.00</td> <td>100 360 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10488.00	45.90	68.30	-22.40	58.48	38.14	15.62	66.34	0.00	100 360 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10488.00</td> <td>45.72</td> <td>68.30</td> <td>-22.58</td> <td>58.30</td> <td>38.14</td> <td>15.62</td> <td>66.34</td> <td>0.00</td> <td>300 360 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10488.00	45.72	68.30	-22.58	58.30	38.14	15.62	66.34	0.00	300 360 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 10488.00	45.90	68.30	-22.40	58.48	38.14	15.62	66.34	0.00	100 360 PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 10488.00	45.72	68.30	-22.58	58.30	38.14	15.62	66.34	0.00	300 360 PEAK																																																																					



	4																																																																													
Mode	Harmonic																																																																													
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz																																																																													
ANT	4																																																																													
Pol.	Horizontal	Vertical																																																																												
Peak	<p>Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a blue signal line fluctuating around 45 dBuV/m, with a red stepped limit line for 5G BAND 1-3. A vertical blue line is at 10520 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10520.00</td> <td>45.01</td> <td>68.30</td> <td>-23.29</td> <td>57.50</td> <td>38.16</td> <td>15.64</td> <td>66.29</td> <td>0.00</td> <td>100 360 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10520.00	45.01	68.30	-23.29	57.50	38.16	15.64	66.29	0.00	100 360 PEAK	<p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows a blue signal line fluctuating around 45 dBuV/m, with a red stepped limit line for 5G BAND 1-3. A vertical blue line is at 10520 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10520.00</td> <td>45.74</td> <td>68.30</td> <td>-22.56</td> <td>58.23</td> <td>38.16</td> <td>15.64</td> <td>66.29</td> <td>0.00</td> <td>300 360 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10520.00	45.74	68.30	-22.56	58.23	38.16	15.64	66.29	0.00	300 360 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 10520.00	45.01	68.30	-23.29	57.50	38.16	15.64	66.29	0.00	100 360 PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 10520.00	45.74	68.30	-22.56	58.23	38.16	15.64	66.29	0.00	300 360 PEAK																																																																					
Avg																																																																														



Mode	5																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz																																																																																																																			
ANT	4																																																																																																																			
Pol.	Horizontal	Vertical																																																																																																																		
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>45.84</td> <td>74.00</td> <td>-28.16</td> <td>58.14</td> <td>38.22</td> <td>15.68</td> <td>66.20</td> <td>0.00</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>10600.00</td> <td>33.19</td> <td>54.00</td> <td>-20.81</td> <td>45.49</td> <td>38.22</td> <td>15.68</td> <td>66.20</td> <td>0.00</td> <td>100</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10600.00	45.84	74.00	-28.16	58.14	38.22	15.68	66.20	0.00	100	360	PEAK	2	10600.00	33.19	54.00	-20.81	45.49	38.22	15.68	66.20	0.00	100	360	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>45.00</td> <td>74.00</td> <td>-29.00</td> <td>57.30</td> <td>38.22</td> <td>15.68</td> <td>66.20</td> <td>0.00</td> <td>200</td> <td>330</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>10600.00</td> <td>33.22</td> <td>54.00</td> <td>-20.78</td> <td>45.52</td> <td>38.22</td> <td>15.68</td> <td>66.20</td> <td>0.00</td> <td>200</td> <td>330</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10600.00	45.00	74.00	-29.00	57.30	38.22	15.68	66.20	0.00	200	330	PEAK	2	10600.00	33.22	54.00	-20.78	45.52	38.22	15.68	66.20	0.00	200	330	AVERAGE
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																										
1	10600.00	45.84	74.00	-28.16	58.14	38.22	15.68	66.20	0.00	100	360	PEAK																																																																																																								
2	10600.00	33.19	54.00	-20.81	45.49	38.22	15.68	66.20	0.00	100	360	AVERAGE																																																																																																								
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																										
1	10600.00	45.00	74.00	-29.00	57.30	38.22	15.68	66.20	0.00	200	330	PEAK																																																																																																								
2	10600.00	33.22	54.00	-20.78	45.52	38.22	15.68	66.20	0.00	200	330	AVERAGE																																																																																																								



	6																																																																																											
Mode	Band Edge																																																																																											
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																											
ANT	4																																																																																											
Pol.	Horizontal	Fundamental																																																																																										
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5353.46</td> <td>61.93</td> <td>74.00</td> <td>-12.07</td> <td>49.39</td> <td>34.78</td> <td>10.83</td> <td>33.07</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>100 261 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5353.46	61.93	74.00	-12.07	49.39	34.78	10.83	33.07	0.00									100 261 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>105.12</td> <td>-----</td> <td>-----</td> <td>92.67</td> <td>34.75</td> <td>10.79</td> <td>33.09</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>100 261 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5320.00	105.12	-----	-----	92.67	34.75	10.79	33.09	0.00									100 261 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																				
1 5353.46	61.93	74.00	-12.07	49.39	34.78	10.83	33.07	0.00																																																																																				
								100 261 PEAK																																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																				
1 5320.00	105.12	-----	-----	92.67	34.75	10.79	33.09	0.00																																																																																				
								100 261 PEAK																																																																																				
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5350.24</td> <td>45.44</td> <td>54.00</td> <td>-8.56</td> <td>32.90</td> <td>34.78</td> <td>10.83</td> <td>33.07</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>100 261 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5350.24	45.44	54.00	-8.56	32.90	34.78	10.83	33.07	0.00									100 261 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>97.49</td> <td>-----</td> <td>-----</td> <td>85.02</td> <td>34.76</td> <td>10.79</td> <td>33.08</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>100 261 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5320.00	97.49	-----	-----	85.02	34.76	10.79	33.08	0.00									100 261 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																				
1 5350.24	45.44	54.00	-8.56	32.90	34.78	10.83	33.07	0.00																																																																																				
								100 261 AVERAGE																																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																				
1 5320.00	97.49	-----	-----	85.02	34.76	10.79	33.08	0.00																																																																																				
								100 261 AVERAGE																																																																																				



	6																																																																																	
Mode	Band Edge																																																																																	
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																	
ANT	4																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5356.40</td> <td>58.28</td> <td>74.00</td> <td>-15.72</td> <td>45.72</td> <td>34.79</td> <td>10.84</td> <td>33.07</td> <td>0.00</td> <td>105</td> <td>28</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5356.40	58.28	74.00	-15.72	45.72	34.79	10.84	33.07	0.00	105	28	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>181.29</td> <td>-----</td> <td>-----</td> <td>88.84</td> <td>34.75</td> <td>10.79</td> <td>33.09</td> <td>0.00</td> <td>105</td> <td>28</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5320.00	181.29	-----	-----	88.84	34.75	10.79	33.09	0.00	105	28	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5356.40	58.28	74.00	-15.72	45.72	34.79	10.84	33.07	0.00	105	28	PEAK																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5320.00	181.29	-----	-----	88.84	34.75	10.79	33.09	0.00	105	28	PEAK																																																																							
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5350.10</td> <td>42.90</td> <td>54.00</td> <td>-11.10</td> <td>30.36</td> <td>34.78</td> <td>10.83</td> <td>33.07</td> <td>0.00</td> <td>105</td> <td>28</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5350.10	42.90	54.00	-11.10	30.36	34.78	10.83	33.07	0.00	105	28	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>93.44</td> <td>-----</td> <td>-----</td> <td>80.97</td> <td>34.76</td> <td>10.79</td> <td>33.08</td> <td>0.00</td> <td>105</td> <td>28</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5320.00	93.44	-----	-----	80.97	34.76	10.79	33.08	0.00	105	28	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5350.10	42.90	54.00	-11.10	30.36	34.78	10.83	33.07	0.00	105	28	AVERAGE																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5320.00	93.44	-----	-----	80.97	34.76	10.79	33.08	0.00	105	28	AVERAGE																																																																							







Mode	6																																																																													
	Harmonic																																																																													
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																													
ANT	4																																																																													
Pol.	Horizontal	Vertical																																																																												
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10640.00</td> <td>44.73</td> <td>74.00</td> <td>-29.27</td> <td>56.92</td> <td>38.25</td> <td>15.71</td> <td>66.15</td> <td>0.00</td> <td>300 360 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10640.00	44.73	74.00	-29.27	56.92	38.25	15.71	66.15	0.00	300 360 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10640.00</td> <td>46.10</td> <td>74.00</td> <td>-27.90</td> <td>58.29</td> <td>38.25</td> <td>15.71</td> <td>66.15</td> <td>0.00</td> <td>100 360 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10640.00	46.10	74.00	-27.90	58.29	38.25	15.71	66.15	0.00	100 360 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 10640.00	44.73	74.00	-29.27	56.92	38.25	15.71	66.15	0.00	300 360 PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 10640.00	46.10	74.00	-27.90	58.29	38.25	15.71	66.15	0.00	100 360 PEAK																																																																					





	7																																																																									
Mode	Band Edge																																																																									
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																									
ANT	4																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5456.00</td> <td>60.67</td> <td>74.00</td> <td>-13.33</td> <td>47.86</td> <td>34.87</td> <td>10.98</td> <td>33.04</td> <td>0.00</td> <td>100</td> <td>268</td> <td>PEAK</td> </tr> <tr> <td>2 5469.40</td> <td>64.54</td> <td>68.30</td> <td>-3.76</td> <td>51.70</td> <td>34.88</td> <td>10.99</td> <td>33.03</td> <td>0.00</td> <td>100</td> <td>268</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	1 5456.00	60.67	74.00	-13.33	47.86	34.87	10.98	33.04	0.00	100	268	PEAK	2 5469.40	64.54	68.30	-3.76	51.70	34.88	10.99	33.03	0.00	100	268	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5500.00</td> <td>107.23</td> <td>-----</td> <td>-----</td> <td>94.29</td> <td>34.91</td> <td>11.05</td> <td>33.02</td> <td>0.00</td> <td>100</td> <td>268</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	1 5500.00	107.23	-----	-----	94.29	34.91	11.05	33.02	0.00	100	268	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																		
1 5456.00	60.67	74.00	-13.33	47.86	34.87	10.98	33.04	0.00	100	268	PEAK																																																															
2 5469.40	64.54	68.30	-3.76	51.70	34.88	10.99	33.03	0.00	100	268	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																		
1 5500.00	107.23	-----	-----	94.29	34.91	11.05	33.02	0.00	100	268	PEAK																																																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5459.95</td> <td>46.73</td> <td>54.00</td> <td>-7.27</td> <td>33.92</td> <td>34.87</td> <td>10.98</td> <td>33.04</td> <td>0.00</td> <td>100</td> <td>268</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	1 5459.95	46.73	54.00	-7.27	33.92	34.87	10.98	33.04	0.00	100	268	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5500.00</td> <td>98.57</td> <td>-----</td> <td>-----</td> <td>85.65</td> <td>34.90</td> <td>11.04</td> <td>33.02</td> <td>0.00</td> <td>100</td> <td>268</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	1 5500.00	98.57	-----	-----	85.65	34.90	11.04	33.02	0.00	100	268	AVERAGE												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																		
1 5459.95	46.73	54.00	-7.27	33.92	34.87	10.98	33.04	0.00	100	268	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																		
1 5500.00	98.57	-----	-----	85.65	34.90	11.04	33.02	0.00	100	268	AVERAGE																																																															

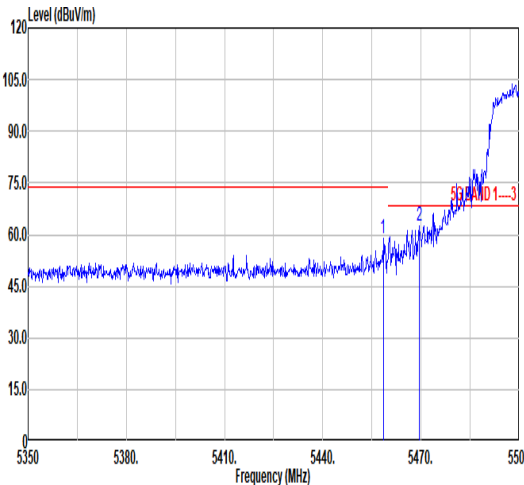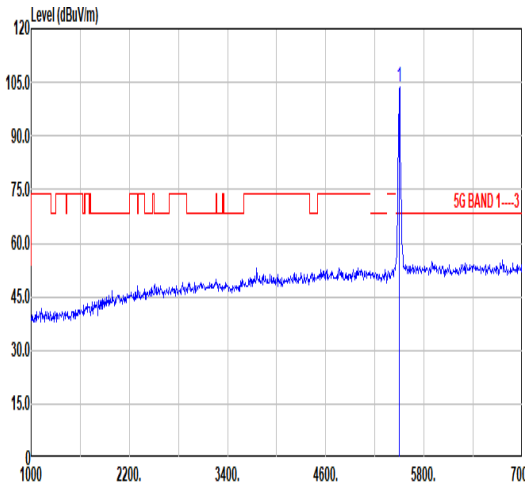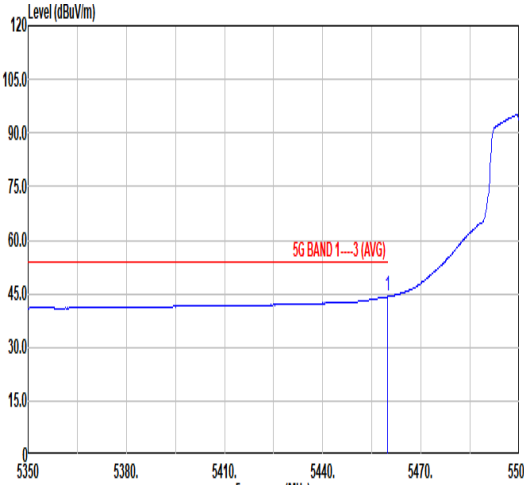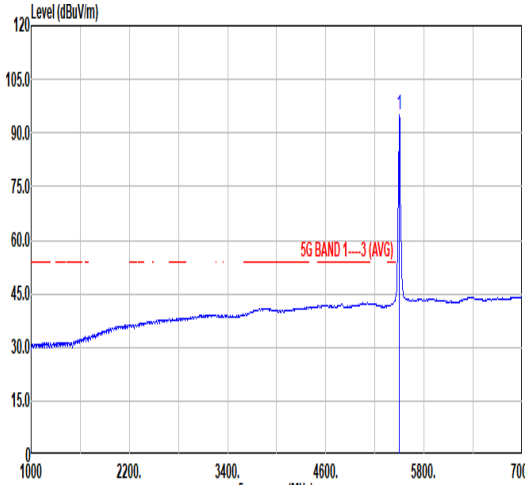

	7																																																																																											
Mode	Band Edge																																																																																											
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																											
ANT	4																																																																																											
Pol.	Vertical	Fundamental																																																																																										
Peak	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5458.45</td> <td>58.76</td> <td>74.00</td> <td>-15.24</td> <td>45.95</td> <td>34.87</td> <td>10.98</td> <td>33.04</td> <td>0.00</td> <td>102</td> <td>34</td> <td>PEAK</td> </tr> <tr> <td>2 5469.40</td> <td>62.40</td> <td>68.30</td> <td>-5.90</td> <td>49.56</td> <td>34.88</td> <td>10.99</td> <td>33.03</td> <td>0.00</td> <td>102</td> <td>34</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5458.45	58.76	74.00	-15.24	45.95	34.87	10.98	33.04	0.00	102	34	PEAK	2 5469.40	62.40	68.30	-5.90	49.56	34.88	10.99	33.03	0.00	102	34	PEAK	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5500.00</td> <td>103.50</td> <td>-----</td> <td>-----</td> <td>90.56</td> <td>34.91</td> <td>11.05</td> <td>33.02</td> <td>0.00</td> <td>102</td> <td>34</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5500.00	103.50	-----	-----	90.56	34.91	11.05	33.02	0.00	102	34	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																				
1 5458.45	58.76	74.00	-15.24	45.95	34.87	10.98	33.04	0.00	102	34	PEAK																																																																																	
2 5469.40	62.40	68.30	-5.90	49.56	34.88	10.99	33.03	0.00	102	34	PEAK																																																																																	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																				
1 5500.00	103.50	-----	-----	90.56	34.91	11.05	33.02	0.00	102	34	PEAK																																																																																	
Avg	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5459.00</td> <td>44.20</td> <td>54.00</td> <td>-9.80</td> <td>31.39</td> <td>34.87</td> <td>10.98</td> <td>33.04</td> <td>0.00</td> <td>102</td> <td>34</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5459.00	44.20	54.00	-9.80	31.39	34.87	10.98	33.04	0.00	102	34	AVERAGE	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5500.00</td> <td>94.94</td> <td>-----</td> <td>-----</td> <td>82.02</td> <td>34.90</td> <td>11.04</td> <td>33.02</td> <td>0.00</td> <td>102</td> <td>34</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5500.00	94.94	-----	-----	82.02	34.90	11.04	33.02	0.00	102	34	AVERAGE												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																				
1 5459.00	44.20	54.00	-9.80	31.39	34.87	10.98	33.04	0.00	102	34	AVERAGE																																																																																	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																				
1 5500.00	94.94	-----	-----	82.02	34.90	11.04	33.02	0.00	102	34	AVERAGE																																																																																	

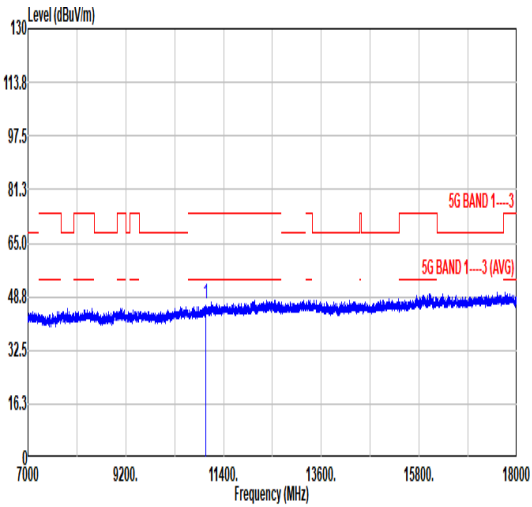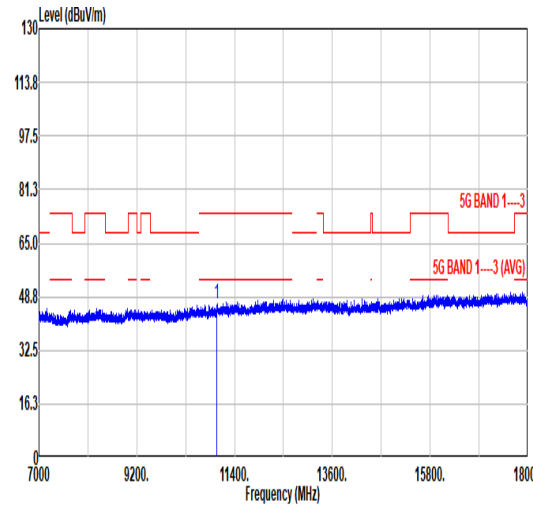

	7																																																																																	
Mode	Harmonic																																																																																	
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																	
ANT	4																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a red stepped line for '5G BAND 1-3' and a blue noisy line for '5G BAND 1-3 (AVG)'. A vertical blue line is at 11400 MHz.</p>	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows a red stepped line for '5G BAND 1-3' and a blue noisy line for '5G BAND 1-3 (AVG)'. A vertical blue line is at 11400 MHz.</p>																																																																																
Avg	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11000.00</td> <td>46.40</td> <td>74.00</td> <td>-27.60</td> <td>57.73</td> <td>38.50</td> <td>15.90</td> <td>65.73</td> <td>0.00</td> <td>300 0 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11000.00	46.40	74.00	-27.60	57.73	38.50	15.90	65.73	0.00	300 0 PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11000.00</td> <td>46.66</td> <td>74.00</td> <td>-27.34</td> <td>57.99</td> <td>38.50</td> <td>15.90</td> <td>65.73</td> <td>0.00</td> <td>100 0 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11000.00	46.66	74.00	-27.34	57.99	38.50	15.90	65.73	0.00	100 0 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 11000.00	46.40	74.00	-27.60	57.73	38.50	15.90	65.73	0.00	300 0 PEAK																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 11000.00	46.66	74.00	-27.34	57.99	38.50	15.90	65.73	0.00	100 0 PEAK																																																																									






Mode	8																																																																																
	Harmonic																																																																																
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																																																																
ANT	4																																																																																
Pol.	Horizontal	Vertical																																																																															
Peak Avg																																																																																	
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11160.00</td> <td>46.40</td> <td>74.00</td> <td>-27.60</td> <td>57.45</td> <td>38.61</td> <td>15.98</td> <td>65.64</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11160.00	46.40	74.00	-27.60	57.45	38.61	15.98	65.64	0.00	300	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11160.00</td> <td>46.78</td> <td>74.00</td> <td>-27.22</td> <td>57.83</td> <td>38.61</td> <td>15.98</td> <td>65.64</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11160.00	46.78	74.00	-27.22	57.83	38.61	15.98	65.64	0.00	100	0
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1 11160.00	46.40	74.00	-27.60	57.45	38.61	15.98	65.64	0.00	300	0	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1 11160.00	46.78	74.00	-27.22	57.83	38.61	15.98	65.64	0.00	100	0	PEAK																																																																						



	9																																																																													
Mode	Band Edge																																																																													
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																													
ANT	4																																																																													
Pol.	Horizontal	Fundamental																																																																												
Peak	<p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The plot shows a signal level starting at approximately 105 dBuV/m at 5700 MHz and decreasing to about 50 dBuV/m at 5765 MHz. A red horizontal line indicates the 5G BAND 1-3 limit at approximately 68 dBuV/m. A peak is observed at 5725.61 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5725.61</td> <td>62.06</td> <td>68.30</td> <td>-6.24</td> <td>48.54</td> <td>35.16</td> <td>11.31</td> <td>32.95</td> <td>0.00</td> <td>100 244 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5725.61	62.06	68.30	-6.24	48.54	35.16	11.31	32.95	0.00	100 244 PEAK	<p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a signal level starting at approximately 40 dBuV/m at 1000 MHz and increasing to about 50 dBuV/m at 5700 MHz. A sharp peak is observed at 5704.00 MHz. A red horizontal line indicates the 5G BAND 1-3 limit at approximately 68 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5704.00</td> <td>108.11</td> <td>68.30</td> <td>39.81</td> <td>94.66</td> <td>35.13</td> <td>11.28</td> <td>32.96</td> <td>0.00</td> <td>100 244 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5704.00	108.11	68.30	39.81	94.66	35.13	11.28	32.96	0.00	100 244 Peak
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5725.61	62.06	68.30	-6.24	48.54	35.16	11.31	32.95	0.00	100 244 PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5704.00	108.11	68.30	39.81	94.66	35.13	11.28	32.96	0.00	100 244 Peak																																																																					
Avg	Blank	<p>Level (dBuV/m) vs Frequency (MHz) plot for Average Fundamental polarization. The plot shows a signal level starting at approximately 30 dBuV/m at 1000 MHz and increasing to about 45 dBuV/m at 5700 MHz. A sharp peak is observed at 5700.00 MHz. A red horizontal line indicates the 5G BAND 1-3 (AVG) limit at approximately 55 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>100.34</td> <td>68.30</td> <td>32.04</td> <td>86.89</td> <td>35.13</td> <td>11.28</td> <td>32.96</td> <td>0.00</td> <td>100 244 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5700.00	100.34	68.30	32.04	86.89	35.13	11.28	32.96	0.00	100 244 AVERAGE																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5700.00	100.34	68.30	32.04	86.89	35.13	11.28	32.96	0.00	100 244 AVERAGE																																																																					

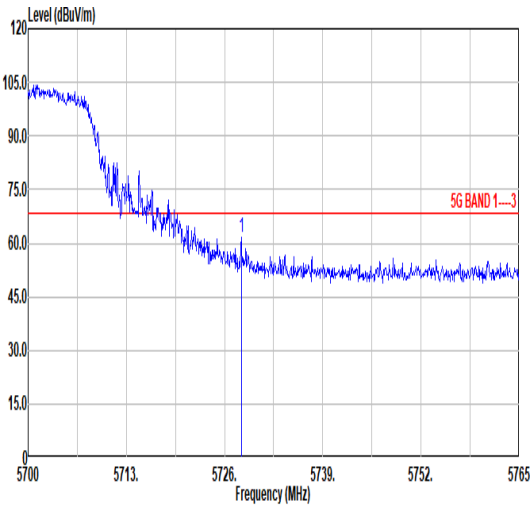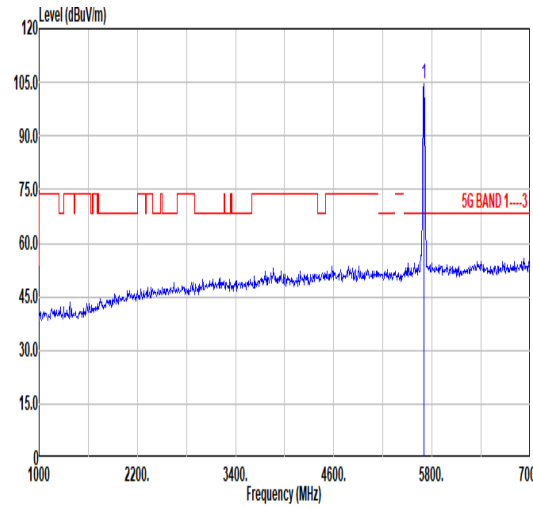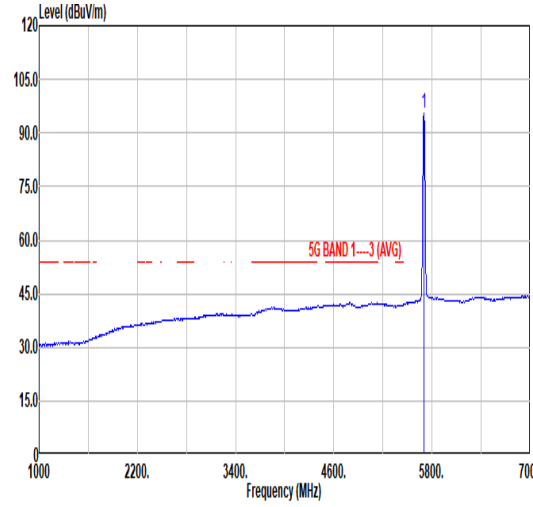

	9																																																																												
Mode	Band Edge																																																																												
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																												
ANT	4																																																																												
Pol.	Vertical	Fundamental																																																																											
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows a signal level starting at approximately 105 dBuV/m at 5700 MHz and decreasing to about 50 dBuV/m at 5765 MHz. A red horizontal line indicates the 5G BAND 1-3 limit at approximately 68.30 dB. A peak is observed at 5728.21 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5728.21</td> <td>61.75</td> <td>68.30</td> <td>-6.55</td> <td>48.23</td> <td>35.16</td> <td>11.31</td> <td>32.95</td> <td>0.00</td> <td>101 31 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5728.21	61.75	68.30	-6.55	48.23	35.16	11.31	32.95	0.00	101 31 PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. The plot shows a signal level starting at approximately 45 dBuV/m at 1000 MHz and increasing to about 105 dBuV/m at 5700 MHz. A red horizontal line indicates the 5G BAND 1-3 limit at approximately 68.30 dB. A sharp peak is observed at 5700.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>104.57</td> <td>68.30</td> <td>36.27</td> <td>91.12</td> <td>35.13</td> <td>11.28</td> <td>32.96</td> <td>0.00</td> <td>101 31 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5700.00	104.57	68.30	36.27	91.12	35.13	11.28	32.96	0.00	101 31 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																				
1 5728.21	61.75	68.30	-6.55	48.23	35.16	11.31	32.95	0.00	101 31 PEAK																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																					
1 5700.00	104.57	68.30	36.27	91.12	35.13	11.28	32.96	0.00	101 31 PEAK																																																																				
Avg	Blank	 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization, Average. The plot shows a signal level starting at approximately 30 dBuV/m at 1000 MHz and increasing to about 45 dBuV/m at 5700 MHz. A red horizontal line indicates the 5G BAND 1-3 (AVG) limit at approximately 68.30 dB. A sharp peak is observed at 5700.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>95.58</td> <td>68.30</td> <td>27.28</td> <td>82.13</td> <td>35.13</td> <td>11.28</td> <td>32.96</td> <td>0.00</td> <td>101 31 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5700.00	95.58	68.30	27.28	82.13	35.13	11.28	32.96	0.00	101 31 AVERAGE																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																					
1 5700.00	95.58	68.30	27.28	82.13	35.13	11.28	32.96	0.00	101 31 AVERAGE																																																																				







Mode	9																																																																																
	Harmonic																																																																																
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																
ANT	4																																																																																
Pol.	Horizontal	Vertical																																																																															
Peak Avg																																																																																	
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11400.00</td> <td>45.96</td> <td>74.00</td> <td>-28.04</td> <td>56.59</td> <td>38.78</td> <td>16.10</td> <td>65.51</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11400.00	45.96	74.00	-28.04	56.59	38.78	16.10	65.51	0.00	300	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11400.00</td> <td>46.38</td> <td>74.00</td> <td>-27.62</td> <td>57.01</td> <td>38.78</td> <td>16.10</td> <td>65.51</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11400.00	46.38	74.00	-27.62	57.01	38.78	16.10	65.51	0.00	100	0
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1 11400.00	45.96	74.00	-28.04	56.59	38.78	16.10	65.51	0.00	300	0	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1 11400.00	46.38	74.00	-27.62	57.01	38.78	16.10	65.51	0.00	100	0	PEAK																																																																						



	10																																																																																			
Mode	Band Edge																																																																																			
	U-NII-1_5.15-5.25_802.11ac VHT20_CH36_5180MHz																																																																																			
ANT	4																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.40</td> <td>65.72</td> <td>74.00</td> <td>-8.28</td> <td>53.62</td> <td>34.62</td> <td>10.62</td> <td>33.14</td> <td>0.00</td> <td>100</td> <td>240</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.40	65.72	74.00	-8.28	53.62	34.62	10.62	33.14	0.00	100	240	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>104.69</td> <td>-----</td> <td>-----</td> <td>92.54</td> <td>34.65</td> <td>10.63</td> <td>33.13</td> <td>0.00</td> <td>100</td> <td>240</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	104.69	-----	-----	92.54	34.65	10.63	33.13	0.00	100	240	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5149.40	65.72	74.00	-8.28	53.62	34.62	10.62	33.14	0.00	100	240	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5180.00	104.69	-----	-----	92.54	34.65	10.63	33.13	0.00	100	240	PEAK																																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>50.75</td> <td>54.00</td> <td>-3.25</td> <td>38.65</td> <td>34.62</td> <td>10.62</td> <td>33.14</td> <td>0.00</td> <td>100</td> <td>240</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5150.00	50.75	54.00	-3.25	38.65	34.62	10.62	33.14	0.00	100	240	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>97.02</td> <td>-----</td> <td>-----</td> <td>84.87</td> <td>34.65</td> <td>10.63</td> <td>33.13</td> <td>0.00</td> <td>100</td> <td>240</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	97.02	-----	-----	84.87	34.65	10.63	33.13	0.00	100	240	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5150.00	50.75	54.00	-3.25	38.65	34.62	10.62	33.14	0.00	100	240	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5180.00	97.02	-----	-----	84.87	34.65	10.63	33.13	0.00	100	240	AVERAGE																																																																								

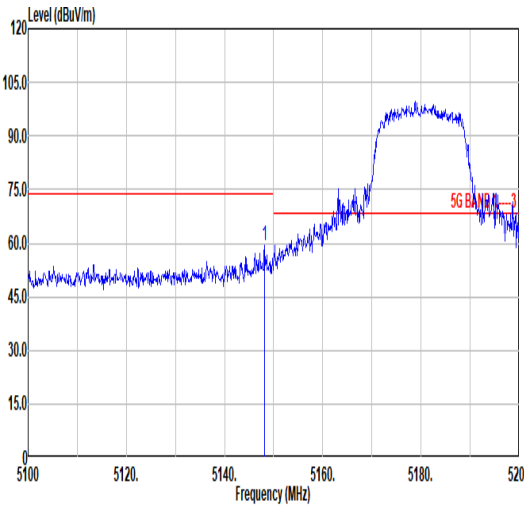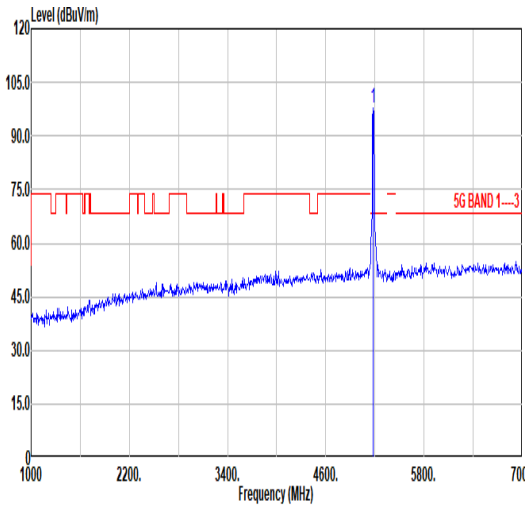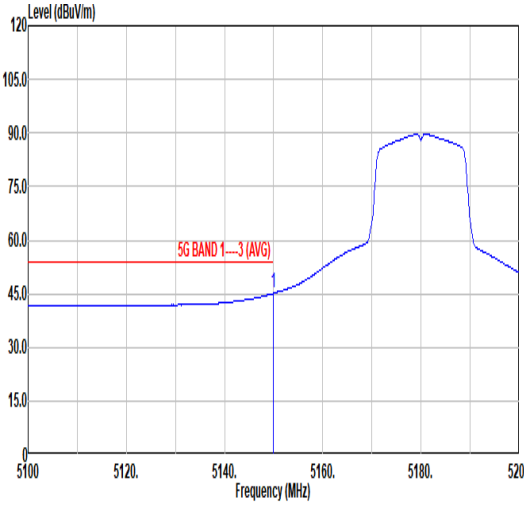
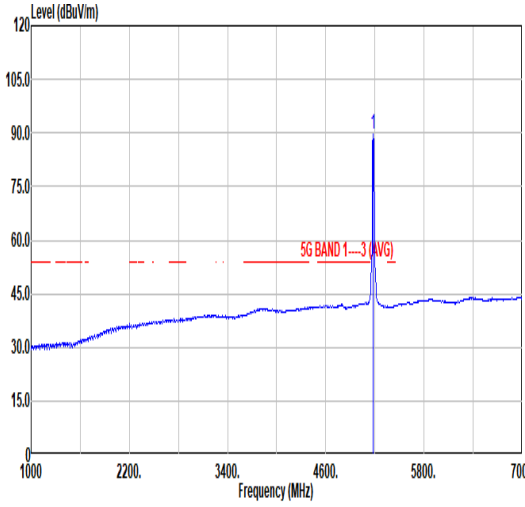


	10																																																																															
Mode	Band Edge																																																																															
	U-NII-1_5.15-5.25_802.11ac VHT20_CH36_5180MHz																																																																															
ANT	4																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	 <table border="1" data-bbox="279 1108 805 1243"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5148.10</td> <td>59.16</td> <td>74.00</td> <td>-14.84</td> <td>47.06</td> <td>34.62</td> <td>10.62</td> <td>33.14</td> <td>0.00</td> <td>100</td> <td>29 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5148.10	59.16	74.00	-14.84	47.06	34.62	10.62	33.14	0.00	100	29 PEAK	 <table border="1" data-bbox="885 1108 1412 1243"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5180.00</td> <td>97.94</td> <td>-----</td> <td>-----</td> <td>85.79</td> <td>34.65</td> <td>10.63</td> <td>33.13</td> <td>0.00</td> <td>100</td> <td>29 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5180.00	97.94	-----	-----	85.79	34.65	10.63	33.13	0.00	100	29 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5148.10	59.16	74.00	-14.84	47.06	34.62	10.62	33.14	0.00	100	29 PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5180.00	97.94	-----	-----	85.79	34.65	10.63	33.13	0.00	100	29 PEAK																																																																						
Avg	 <table border="1" data-bbox="279 1792 805 1926"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5150.00</td> <td>45.15</td> <td>54.00</td> <td>-8.85</td> <td>33.05</td> <td>34.62</td> <td>10.62</td> <td>33.14</td> <td>0.00</td> <td>100</td> <td>29 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5150.00	45.15	54.00	-8.85	33.05	34.62	10.62	33.14	0.00	100	29 AVERAGE	 <table border="1" data-bbox="885 1792 1412 1926"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5180.00</td> <td>89.79</td> <td>-----</td> <td>-----</td> <td>77.64</td> <td>34.65</td> <td>10.63</td> <td>33.13</td> <td>0.00</td> <td>100</td> <td>29 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5180.00	89.79	-----	-----	77.64	34.65	10.63	33.13	0.00	100	29 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5150.00	45.15	54.00	-8.85	33.05	34.62	10.62	33.14	0.00	100	29 AVERAGE																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5180.00	89.79	-----	-----	77.64	34.65	10.63	33.13	0.00	100	29 AVERAGE																																																																						



	10																																																																																	
Mode	Harmonic																																																																																	
	U-NII-1_5.15-5.25_802.11ac VHT20_CH36_5180MHz																																																																																	
ANT	4																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak	<p>Level (dBuV/m) vs Frequency (MHz) for Horizontal Peak. Shows 5G BAND 1-3 and 5G BAND 1-3 (AVG) traces.</p>	<p>Level (dBuV/m) vs Frequency (MHz) for Vertical Peak. Shows 5G BAND 1-3 and 5G BAND 1-3 (AVG) traces.</p>																																																																																
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10360.00</td> <td>45.96</td> <td>68.30</td> <td>-22.34</td> <td>58.84</td> <td>38.05</td> <td>15.55</td> <td>66.48</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10360.00	45.96	68.30	-22.34	58.84	38.05	15.55	66.48	0.00	300	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10360.00</td> <td>45.39</td> <td>68.30</td> <td>-22.91</td> <td>58.27</td> <td>38.05</td> <td>15.55</td> <td>66.48</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10360.00	45.39	68.30	-22.91	58.27	38.05	15.55	66.48	0.00	100	0	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 10360.00	45.96	68.30	-22.34	58.84	38.05	15.55	66.48	0.00	300	0	PEAK																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 10360.00	45.39	68.30	-22.91	58.27	38.05	15.55	66.48	0.00	100	0	PEAK																																																																							

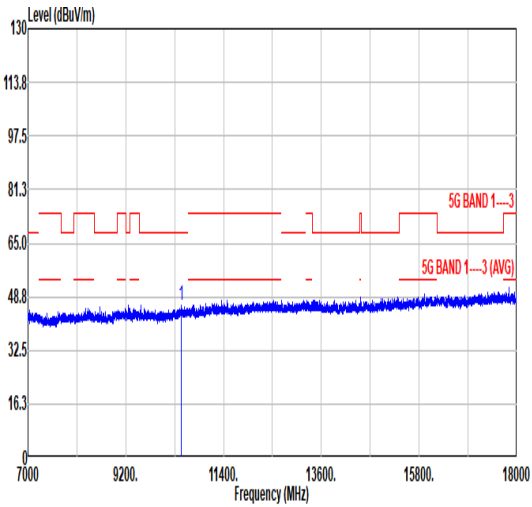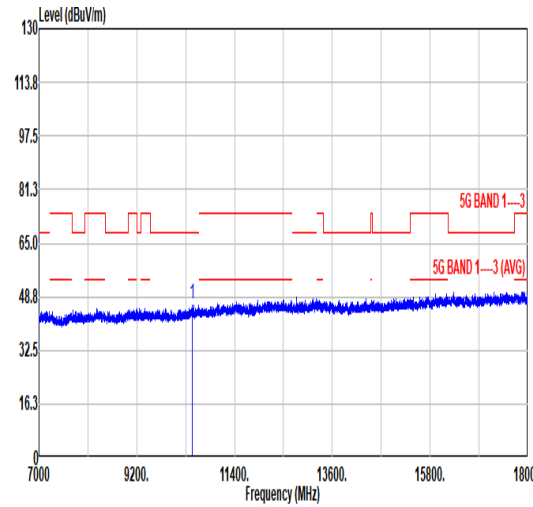

	11																																																																													
Mode	Harmonic																																																																													
	U-NII-1_5.15-5.25_802.11ac VHT20_CH44_5220MHz																																																																													
ANT	4																																																																													
Pol.	Horizontal	Vertical																																																																												
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a blue signal line fluctuating around 48.8 dBuV/m, with a red stepped limit line for 5G BAND 1-3. A vertical blue arrow points to a peak at 10448.00 MHz.</p>	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows a blue signal line fluctuating around 46.68 dBuV/m, with a red stepped limit line for 5G BAND 1-3. A vertical blue arrow points to a peak at 10448.00 MHz.</p>																																																																												
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10448.00</td> <td>45.90</td> <td>68.30</td> <td>-22.40</td> <td>58.58</td> <td>38.11</td> <td>15.60</td> <td>66.39</td> <td>0.00</td> <td>300 0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10448.00	45.90	68.30	-22.40	58.58	38.11	15.60	66.39	0.00	300 0 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10448.00</td> <td>46.68</td> <td>68.30</td> <td>-21.62</td> <td>59.36</td> <td>38.11</td> <td>15.60</td> <td>66.39</td> <td>0.00</td> <td>100 0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10448.00	46.68	68.30	-21.62	59.36	38.11	15.60	66.39	0.00	100 0 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 10448.00	45.90	68.30	-22.40	58.58	38.11	15.60	66.39	0.00	300 0 PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 10448.00	46.68	68.30	-21.62	59.36	38.11	15.60	66.39	0.00	100 0 PEAK																																																																					







	12																																																																												
Mode	Harmonic																																																																												
	U-NII-1_5.15-5.25_802.11ac VHT20_CH48_5240MHz																																																																												
ANT	4																																																																												
Pol.	Horizontal	Vertical																																																																											
Peak Avg																																																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10488.00</td> <td>45.13</td> <td>68.30</td> <td>-23.17</td> <td>57.71</td> <td>38.14</td> <td>15.62</td> <td>66.34</td> <td>0.00</td> <td>300 0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10488.00	45.13	68.30	-23.17	57.71	38.14	15.62	66.34	0.00	300 0 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10488.00</td> <td>46.49</td> <td>68.30</td> <td>-21.81</td> <td>59.07</td> <td>38.14</td> <td>15.62</td> <td>66.34</td> <td>0.00</td> <td>100 0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10488.00	46.49	68.30	-21.81	59.07	38.14	15.62	66.34	0.00
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																				
1 10488.00	45.13	68.30	-23.17	57.71	38.14	15.62	66.34	0.00	300 0 PEAK																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																				
1 10488.00	46.49	68.30	-21.81	59.07	38.14	15.62	66.34	0.00	100 0 PEAK																																																																				



	13																																																																													
Mode	Harmonic																																																																													
	U-NII-2A_5.25-5.35_802.11ac_VHT20_CH52_5260MHz																																																																													
ANT	4																																																																													
Pol.	Horizontal	Vertical																																																																												
Peak	<p>Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a blue signal line fluctuating around 45 dBuV/m, with a red stepped limit line for 5G BAND 1-3. A vertical blue line is at 10520 MHz.</p>	<p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows a blue signal line fluctuating around 45 dBuV/m, with a red stepped limit line for 5G BAND 1-3. A vertical blue line is at 10520 MHz.</p>																																																																												
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10520.00</td> <td>45.42</td> <td>68.30</td> <td>-22.88</td> <td>57.91</td> <td>38.16</td> <td>15.64</td> <td>66.29</td> <td>0.00</td> <td>300 0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10520.00	45.42	68.30	-22.88	57.91	38.16	15.64	66.29	0.00	300 0 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10520.00</td> <td>45.30</td> <td>68.30</td> <td>-23.00</td> <td>57.79</td> <td>38.16</td> <td>15.64</td> <td>66.29</td> <td>0.00</td> <td>100 0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10520.00	45.30	68.30	-23.00	57.79	38.16	15.64	66.29	0.00	100 0 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 10520.00	45.42	68.30	-22.88	57.91	38.16	15.64	66.29	0.00	300 0 PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 10520.00	45.30	68.30	-23.00	57.79	38.16	15.64	66.29	0.00	100 0 PEAK																																																																					

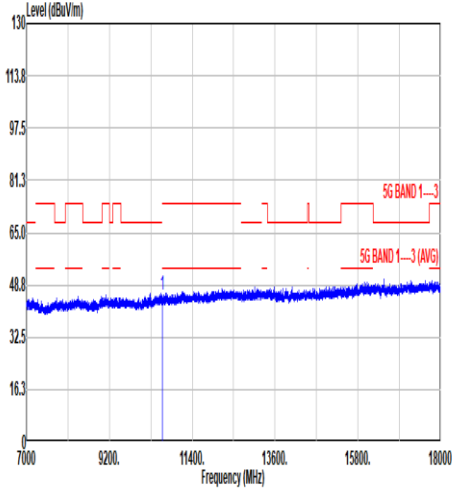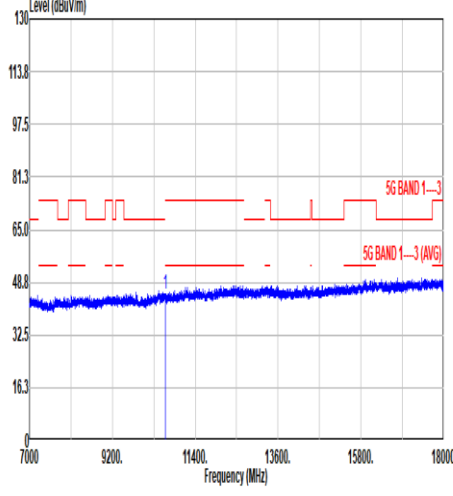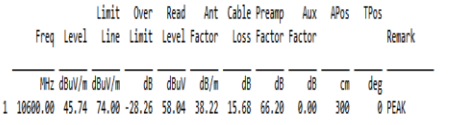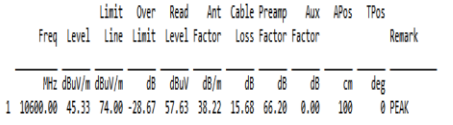

	14																																																																																									
Mode	Harmonic																																																																																									
	U-NII-2A_5.25-5.35_802.11ac_VHT20_CH60_5300MHz																																																																																									
ANT	4																																																																																									
Pol.	Horizontal	Vertical																																																																																								
Peak	 <p>Level (dBuV/m)</p> <p>130</p> <p>113.8</p> <p>97.5</p> <p>81.3</p> <p>65.0</p> <p>48.8</p> <p>32.5</p> <p>16.3</p> <p>0</p> <p>7000 9200 11400 13600 15800 18000</p> <p>Frequency (MHz)</p> <p>5G BAND 1-3</p> <p>5G BAND 1-3 (AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>45.74</td> <td>74.00</td> <td>-28.26</td> <td>58.04</td> <td>38.22</td> <td>15.68</td> <td>66.20</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10600.00	45.74	74.00	-28.26	58.04	38.22	15.68	66.20	0.00	300	0	PEAK	 <p>Level (dBuV/m)</p> <p>130</p> <p>113.8</p> <p>97.5</p> <p>81.3</p> <p>65.0</p> <p>48.8</p> <p>32.5</p> <p>16.3</p> <p>0</p> <p>7000 9200 11400 13600 15800 18000</p> <p>Frequency (MHz)</p> <p>5G BAND 1-3</p> <p>5G BAND 1-3 (AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>45.33</td> <td>74.00</td> <td>-28.67</td> <td>57.63</td> <td>38.22</td> <td>15.68</td> <td>66.20</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10600.00	45.33	74.00	-28.67	57.63	38.22	15.68	66.20	0.00	100	0	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	10600.00	45.74	74.00	-28.26	58.04	38.22	15.68	66.20	0.00	300	0	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	10600.00	45.33	74.00	-28.67	57.63	38.22	15.68	66.20	0.00	100	0	PEAK																																																																														
Avg	 <p>Level (dBuV/m)</p> <p>130</p> <p>113.8</p> <p>97.5</p> <p>81.3</p> <p>65.0</p> <p>48.8</p> <p>32.5</p> <p>16.3</p> <p>0</p> <p>7000 9200 11400 13600 15800 18000</p> <p>Frequency (MHz)</p> <p>5G BAND 1-3</p> <p>5G BAND 1-3 (AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>45.74</td> <td>74.00</td> <td>-28.26</td> <td>58.04</td> <td>38.22</td> <td>15.68</td> <td>66.20</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10600.00	45.74	74.00	-28.26	58.04	38.22	15.68	66.20	0.00	300	0	PEAK	 <p>Level (dBuV/m)</p> <p>130</p> <p>113.8</p> <p>97.5</p> <p>81.3</p> <p>65.0</p> <p>48.8</p> <p>32.5</p> <p>16.3</p> <p>0</p> <p>7000 9200 11400 13600 15800 18000</p> <p>Frequency (MHz)</p> <p>5G BAND 1-3</p> <p>5G BAND 1-3 (AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>45.33</td> <td>74.00</td> <td>-28.67</td> <td>57.63</td> <td>38.22</td> <td>15.68</td> <td>66.20</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10600.00	45.33	74.00	-28.67	57.63	38.22	15.68	66.20	0.00	100	0	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	10600.00	45.74	74.00	-28.26	58.04	38.22	15.68	66.20	0.00	300	0	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	10600.00	45.33	74.00	-28.67	57.63	38.22	15.68	66.20	0.00	100	0	PEAK																																																																														



	15																																																																													
Mode	Band Edge																																																																													
	U-NII-2A_5.25-5.35_802.11ac_VHT20_CH64_5320MHz																																																																													
ANT	4																																																																													
Pol.	Horizontal	Fundamental																																																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5353.60</td> <td>62.08</td> <td>74.00</td> <td>-11.92</td> <td>49.54</td> <td>34.78</td> <td>10.83</td> <td>33.07</td> <td>0.00</td> <td>109 249 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5353.60	62.08	74.00	-11.92	49.54	34.78	10.83	33.07	0.00	109 249 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>105.83</td> <td>74.00</td> <td>31.83</td> <td>93.36</td> <td>34.76</td> <td>10.79</td> <td>33.08</td> <td>0.00</td> <td>109 249 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5320.00	105.83	74.00	31.83	93.36	34.76	10.79	33.08	0.00	109 249 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5353.60	62.08	74.00	-11.92	49.54	34.78	10.83	33.07	0.00	109 249 PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5320.00	105.83	74.00	31.83	93.36	34.76	10.79	33.08	0.00	109 249 PEAK																																																																					
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5350.10</td> <td>45.62</td> <td>54.00</td> <td>-8.38</td> <td>33.08</td> <td>34.78</td> <td>10.83</td> <td>33.07</td> <td>0.00</td> <td>109 249 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5350.10	45.62	54.00	-8.38	33.08	34.78	10.83	33.07	0.00	109 249 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>97.75</td> <td>54.00</td> <td>43.75</td> <td>85.28</td> <td>34.76</td> <td>10.79</td> <td>33.08</td> <td>0.00</td> <td>109 249 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5320.00	97.75	54.00	43.75	85.28	34.76	10.79	33.08	0.00	109 249 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5350.10	45.62	54.00	-8.38	33.08	34.78	10.83	33.07	0.00	109 249 AVERAGE																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5320.00	97.75	54.00	43.75	85.28	34.76	10.79	33.08	0.00	109 249 AVERAGE																																																																					



	15																																																																																			
Mode	Band Edge																																																																																			
	U-NII-2A_5.25-5.35_802.11ac_VHT20_CH64_5320MHz																																																																																			
ANT	4																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5353.32</td> <td>56.48</td> <td>74.00</td> <td>-17.52</td> <td>43.94</td> <td>34.78</td> <td>10.83</td> <td>33.07</td> <td>0.00</td> <td>100</td> <td>31</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5353.32	56.48	74.00	-17.52	43.94	34.78	10.83	33.07	0.00	100	31	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>100.16</td> <td>-----</td> <td>-----</td> <td>87.69</td> <td>34.76</td> <td>10.79</td> <td>33.08</td> <td>0.00</td> <td>100</td> <td>31</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	100.16	-----	-----	87.69	34.76	10.79	33.08	0.00	100	31	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5353.32	56.48	74.00	-17.52	43.94	34.78	10.83	33.07	0.00	100	31	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5320.00	100.16	-----	-----	87.69	34.76	10.79	33.08	0.00	100	31	PEAK																																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.38</td> <td>43.19</td> <td>54.00</td> <td>-10.81</td> <td>30.65</td> <td>34.78</td> <td>10.83</td> <td>33.07</td> <td>0.00</td> <td>100</td> <td>31</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5350.38	43.19	54.00	-10.81	30.65	34.78	10.83	33.07	0.00	100	31	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>92.22</td> <td>-----</td> <td>-----</td> <td>79.75</td> <td>34.76</td> <td>10.79</td> <td>33.08</td> <td>0.00</td> <td>100</td> <td>31</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	92.22	-----	-----	79.75	34.76	10.79	33.08	0.00	100	31	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5350.38	43.19	54.00	-10.81	30.65	34.78	10.83	33.07	0.00	100	31	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5320.00	92.22	-----	-----	79.75	34.76	10.79	33.08	0.00	100	31	AVERAGE																																																																								







Mode	15																																																																																
	Harmonic																																																																																
	U-NII-2A_5.25-5.35_802.11ac_VHT20_CH64_5320MHz																																																																																
ANT	4																																																																																
Pol.	Horizontal	Vertical																																																																															
Peak Avg																																																																																	
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10640.00</td> <td>44.76</td> <td>74.00</td> <td>-29.24</td> <td>56.95</td> <td>38.25</td> <td>15.71</td> <td>66.15</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10640.00	44.76	74.00	-29.24	56.95	38.25	15.71	66.15	0.00	300	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10640.00</td> <td>44.56</td> <td>74.00</td> <td>-29.44</td> <td>56.75</td> <td>38.25</td> <td>15.71</td> <td>66.15</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10640.00	44.56	74.00	-29.44	56.75	38.25	15.71	66.15	0.00	100	0
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1 10640.00	44.76	74.00	-29.24	56.95	38.25	15.71	66.15	0.00	300	0	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1 10640.00	44.56	74.00	-29.44	56.75	38.25	15.71	66.15	0.00	100	0	PEAK																																																																						



	16																																																																												
Mode	Band Edge																																																																												
	U-NII-2C_5.47-5.725_802.11ac_VHT20_CH100_5500MHz																																																																												
ANT	4																																																																												
Pol.	Horizontal	Fundamental																																																																											
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.95</td> <td>56.84</td> <td>74.00</td> <td>-17.16</td> <td>44.03</td> <td>34.87</td> <td>10.98</td> <td>33.04</td> <td>0.00</td> <td>108</td> <td>262</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.40</td> <td>60.70</td> <td>68.30</td> <td>-7.60</td> <td>47.86</td> <td>34.88</td> <td>10.99</td> <td>33.03</td> <td>0.00</td> <td>108</td> <td>262</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	1	5459.95	56.84	74.00	-17.16	44.03	34.87	10.98	33.04	0.00	108	262	PEAK	2	5469.40	60.70	68.30	-7.60	47.86	34.88	10.99	33.03	0.00	108	262	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>106.30</td> <td>-----</td> <td>-----</td> <td>93.38</td> <td>34.90</td> <td>11.04</td> <td>33.02</td> <td>0.00</td> <td>108</td> <td>262</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	1	5500.00	106.30	-----	-----	93.38	34.90	11.04	33.02	0.00	108	262	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																					
1	5459.95	56.84	74.00	-17.16	44.03	34.87	10.98	33.04	0.00	108	262	PEAK																																																																	
2	5469.40	60.70	68.30	-7.60	47.86	34.88	10.99	33.03	0.00	108	262	PEAK																																																																	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																					
1	5500.00	106.30	-----	-----	93.38	34.90	11.04	33.02	0.00	108	262	PEAK																																																																	
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.95</td> <td>44.74</td> <td>54.00</td> <td>-9.26</td> <td>31.93</td> <td>34.87</td> <td>10.98</td> <td>33.04</td> <td>0.00</td> <td>108</td> <td>262</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	1	5459.95	44.74	54.00	-9.26	31.93	34.87	10.98	33.04	0.00	108	262	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>97.21</td> <td>-----</td> <td>-----</td> <td>84.29</td> <td>34.90</td> <td>11.04</td> <td>33.02</td> <td>0.00</td> <td>108</td> <td>262</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	1	5500.00	97.21	-----	-----	84.29	34.90	11.04	33.02	0.00	108	262	AVERAGE													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																					
1	5459.95	44.74	54.00	-9.26	31.93	34.87	10.98	33.04	0.00	108	262	AVERAGE																																																																	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																					
1	5500.00	97.21	-----	-----	84.29	34.90	11.04	33.02	0.00	108	262	AVERAGE																																																																	

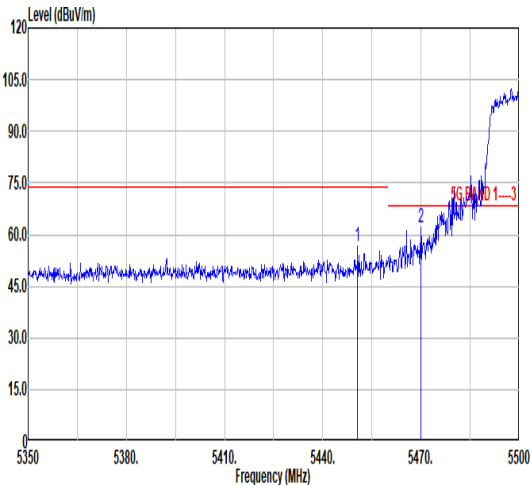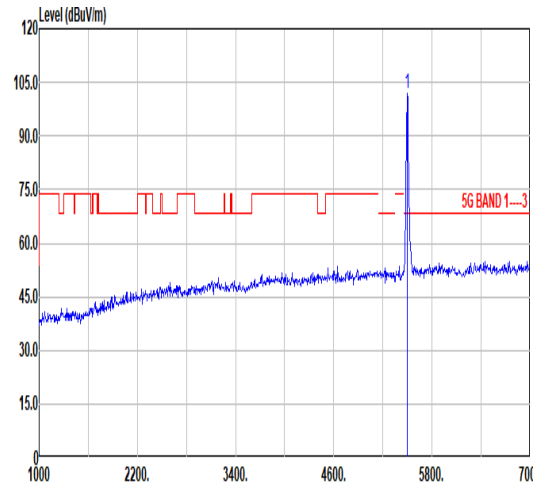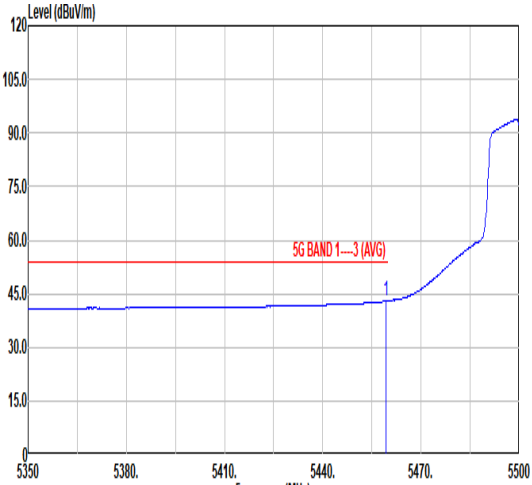
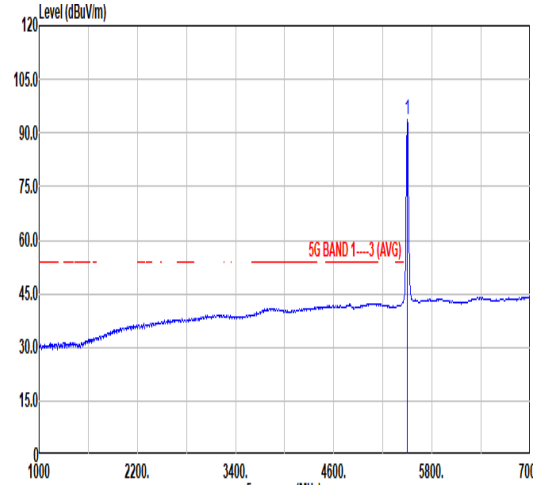


	16																																																																																																			
Mode	Band Edge																																																																																																			
	U-NII-2C_5.47-5.725_802.11ac_VHT20_CH100_5500MHz																																																																																																			
ANT	4																																																																																																			
Pol.	Vertical	Fundamental																																																																																																		
Peak	 <table border="1" data-bbox="279 1086 813 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5450.65</td> <td>56.60</td> <td>74.00</td> <td>-17.40</td> <td>43.81</td> <td>34.86</td> <td>10.97</td> <td>33.04</td> <td>0.00</td> <td>102</td> <td>34 PEAK</td> </tr> <tr> <td>2</td> <td>5470.00</td> <td>62.25</td> <td>68.30</td> <td>-6.05</td> <td>49.41</td> <td>34.88</td> <td>10.99</td> <td>33.03</td> <td>0.00</td> <td>102</td> <td>34 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5450.65	56.60	74.00	-17.40	43.81	34.86	10.97	33.04	0.00	102	34 PEAK	2	5470.00	62.25	68.30	-6.05	49.41	34.88	10.99	33.03	0.00	102	34 PEAK	 <table border="1" data-bbox="877 1086 1412 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>102.00</td> <td>-----</td> <td>-----</td> <td>89.08</td> <td>34.90</td> <td>11.04</td> <td>33.02</td> <td>0.00</td> <td>102</td> <td>34 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	102.00	-----	-----	89.08	34.90	11.04	33.02	0.00	102	34 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5450.65	56.60	74.00	-17.40	43.81	34.86	10.97	33.04	0.00	102	34 PEAK																																																																																									
2	5470.00	62.25	68.30	-6.05	49.41	34.88	10.99	33.03	0.00	102	34 PEAK																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5500.00	102.00	-----	-----	89.08	34.90	11.04	33.02	0.00	102	34 PEAK																																																																																									
Avg	 <table border="1" data-bbox="279 1769 813 1926"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.35</td> <td>42.97</td> <td>54.00</td> <td>-11.03</td> <td>30.16</td> <td>34.87</td> <td>10.98</td> <td>33.04</td> <td>0.00</td> <td>102</td> <td>34 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.35	42.97	54.00	-11.03	30.16	34.87	10.98	33.04	0.00	102	34 AVERAGE	 <table border="1" data-bbox="877 1769 1412 1926"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>93.82</td> <td>-----</td> <td>-----</td> <td>80.90</td> <td>34.90</td> <td>11.04</td> <td>33.02</td> <td>0.00</td> <td>102</td> <td>34 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	93.82	-----	-----	80.90	34.90	11.04	33.02	0.00	102	34 AVERAGE												
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5459.35	42.97	54.00	-11.03	30.16	34.87	10.98	33.04	0.00	102	34 AVERAGE																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5500.00	93.82	-----	-----	80.90	34.90	11.04	33.02	0.00	102	34 AVERAGE																																																																																									



Mode	16																																																																												
	Harmonic																																																																												
	U-NII-2C_5.47-5.725_802.11ac_VHT20_CH100_5500MHz																																																																												
ANT	4																																																																												
Pol.	Horizontal	Vertical																																																																											
Peak Avg																																																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11000.00</td> <td>45.94</td> <td>74.00</td> <td>-28.06</td> <td>57.27</td> <td>38.50</td> <td>15.90</td> <td>65.73</td> <td>0.00</td> <td>300 0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11000.00	45.94	74.00	-28.06	57.27	38.50	15.90	65.73	0.00	300 0 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11000.00</td> <td>46.55</td> <td>74.00</td> <td>-27.45</td> <td>57.88</td> <td>38.50</td> <td>15.90</td> <td>65.73</td> <td>0.00</td> <td>100 0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11000.00	46.55	74.00	-27.45	57.88	38.50	15.90	65.73	0.00
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																				
1 11000.00	45.94	74.00	-28.06	57.27	38.50	15.90	65.73	0.00	300 0 PEAK																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																				
1 11000.00	46.55	74.00	-27.45	57.88	38.50	15.90	65.73	0.00	100 0 PEAK																																																																				


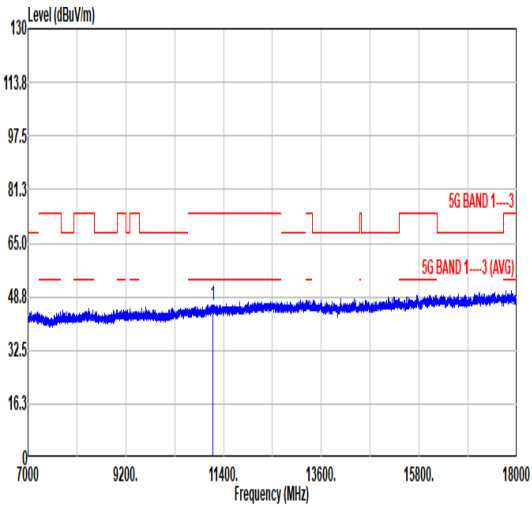
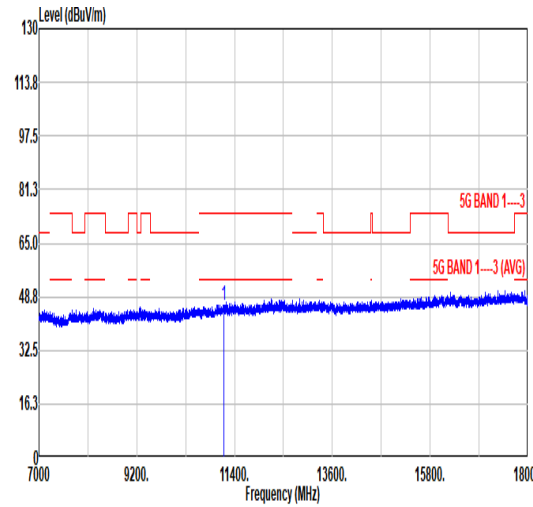


	17																																																																																	
Mode	Harmonic																																																																																	
	U-NII-2C_5.47-5.725_802.11ac_VHT20_CH116_5580MHz																																																																																	
ANT	4																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a blue signal line fluctuating around 48.8 dBuV/m, with a red stepped limit line for 5G BAND 1-3. A vertical blue line is drawn at 11160 MHz.</p>	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows a blue signal line fluctuating around 48.8 dBuV/m, with a red stepped limit line for 5G BAND 1-3. A vertical blue line is drawn at 11160 MHz.</p>																																																																																
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11160.00</td> <td>46.31</td> <td>74.00</td> <td>-27.69</td> <td>57.36</td> <td>38.61</td> <td>15.98</td> <td>65.64</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11160.00	46.31	74.00	-27.69	57.36	38.61	15.98	65.64	0.00	300	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11160.00</td> <td>46.31</td> <td>74.00</td> <td>-27.69</td> <td>57.36</td> <td>38.61</td> <td>15.98</td> <td>65.64</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11160.00	46.31	74.00	-27.69	57.36	38.61	15.98	65.64	0.00	100	0	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 11160.00	46.31	74.00	-27.69	57.36	38.61	15.98	65.64	0.00	300	0	PEAK																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 11160.00	46.31	74.00	-27.69	57.36	38.61	15.98	65.64	0.00	100	0	PEAK																																																																							



	18																																																																													
Mode	Band Edge																																																																													
	U-NII-2C_5.47-5.725_802.11ac_VHT20_CH140_5700MHz																																																																													
ANT	4																																																																													
Pol.	Horizontal	Fundamental																																																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5727.43</td> <td>64.29</td> <td>68.30</td> <td>-4.01</td> <td>50.77</td> <td>35.16</td> <td>11.31</td> <td>32.95</td> <td>0.00</td> <td>100 240 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5727.43	64.29	68.30	-4.01	50.77	35.16	11.31	32.95	0.00	100 240 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>107.44</td> <td>-----</td> <td>-----</td> <td>93.99</td> <td>35.13</td> <td>11.28</td> <td>32.96</td> <td>0.00</td> <td>100 240 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5700.00	107.44	-----	-----	93.99	35.13	11.28	32.96	0.00	100 240 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5727.43	64.29	68.30	-4.01	50.77	35.16	11.31	32.95	0.00	100 240 PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5700.00	107.44	-----	-----	93.99	35.13	11.28	32.96	0.00	100 240 PEAK																																																																					
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>99.15</td> <td>-----</td> <td>-----</td> <td>85.70</td> <td>35.13</td> <td>11.28</td> <td>32.96</td> <td>0.00</td> <td>100 240 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5700.00	99.15	-----	-----	85.70	35.13	11.28	32.96	0.00	100 240 AVERAGE																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5700.00	99.15	-----	-----	85.70	35.13	11.28	32.96	0.00	100 240 AVERAGE																																																																					

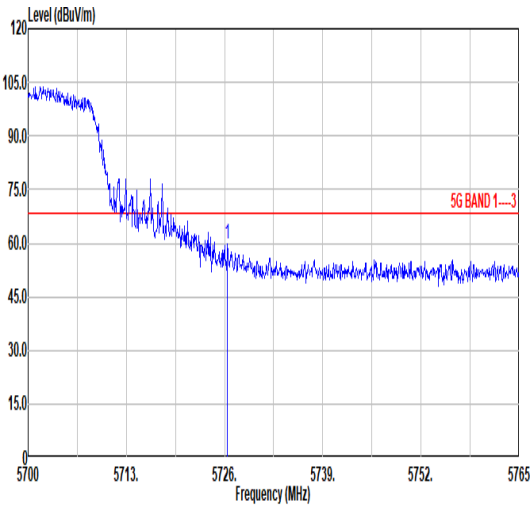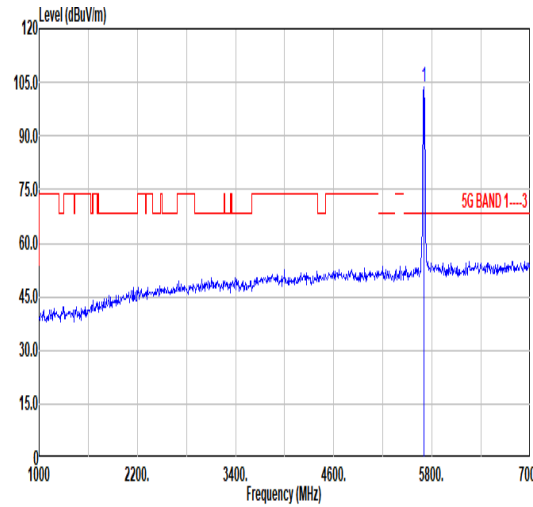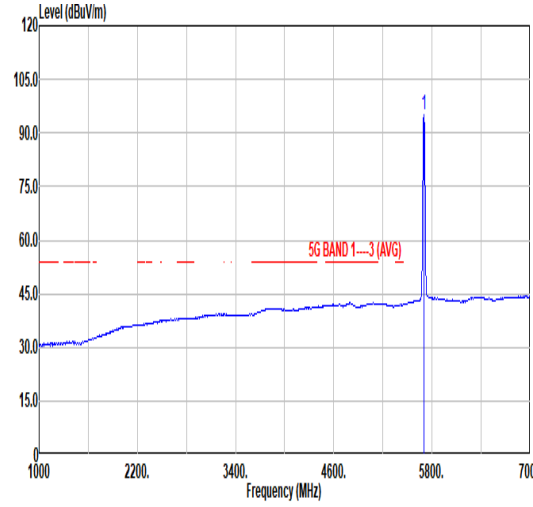

	18																																																																													
Mode	Band Edge																																																																													
	U-NII-2C_5.47-5.725_802.11ac_VHT20_CH140_5700MHz																																																																													
ANT	4																																																																													
Pol.	Vertical	Fundamental																																																																												
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. A red horizontal line indicates the 5G BAND 1-3 limit at approximately 68.30 dBuV/m. A significant peak is observed at 5726.39 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5726.39</td> <td>59.61</td> <td>68.30</td> <td>-8.69</td> <td>46.89</td> <td>35.16</td> <td>11.31</td> <td>32.95</td> <td>0.00</td> <td>101 32 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5726.39	59.61	68.30	-8.69	46.89	35.16	11.31	32.95	0.00	101 32 PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. A red horizontal line indicates the 5G BAND 1-3 limit at approximately 68.30 dBuV/m. A sharp peak is observed at 5700.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>103.56</td> <td>68.30</td> <td>35.26</td> <td>90.11</td> <td>35.13</td> <td>11.28</td> <td>32.96</td> <td>0.00</td> <td>101 32 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5700.00	103.56	68.30	35.26	90.11	35.13	11.28	32.96	0.00	101 32 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5726.39	59.61	68.30	-8.69	46.89	35.16	11.31	32.95	0.00	101 32 PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5700.00	103.56	68.30	35.26	90.11	35.13	11.28	32.96	0.00	101 32 PEAK																																																																					
Avg	Blank	 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization, Average view. A red horizontal line indicates the 5G BAND 1-3 (AVG) limit at approximately 54.94 dBuV/m. A sharp peak is observed at 5700.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>94.94</td> <td>54.94</td> <td>39.99</td> <td>81.49</td> <td>35.13</td> <td>11.28</td> <td>32.96</td> <td>0.00</td> <td>101 32 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5700.00	94.94	54.94	39.99	81.49	35.13	11.28	32.96	0.00	101 32 AVERAGE																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5700.00	94.94	54.94	39.99	81.49	35.13	11.28	32.96	0.00	101 32 AVERAGE																																																																					



	18																																																																												
Mode	Harmonic																																																																												
	U-NII-2C_5.47-5.725_802.11ac_VHT20_CH140_5700MHz																																																																												
ANT	4																																																																												
Pol.	Horizontal	Vertical																																																																											
Peak Avg																																																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11400.00</td> <td>46.29</td> <td>74.00</td> <td>-27.71</td> <td>56.92</td> <td>38.78</td> <td>16.10</td> <td>65.51</td> <td>0.00</td> <td>300 0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11400.00	46.29	74.00	-27.71	56.92	38.78	16.10	65.51	0.00	300 0 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11400.00</td> <td>46.90</td> <td>74.00</td> <td>-27.10</td> <td>57.53</td> <td>38.78</td> <td>16.10</td> <td>65.51</td> <td>0.00</td> <td>100 0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11400.00	46.90	74.00	-27.10	57.53	38.78	16.10	65.51	0.00
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																				
1 11400.00	46.29	74.00	-27.71	56.92	38.78	16.10	65.51	0.00	300 0 PEAK																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																				
1 11400.00	46.90	74.00	-27.10	57.53	38.78	16.10	65.51	0.00	100 0 PEAK																																																																				







	19																																																																															
Mode	Band Edge - L																																																																															
	U-NII-1_5.15-5.25_802.11ac VHT40_CH38_5190MHz																																																																															
ANT	4																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5190.00</td> <td>64.47</td> <td>74.00</td> <td>-9.53</td> <td>52.37</td> <td>34.62</td> <td>10.62</td> <td>33.14</td> <td>0.00</td> <td>100</td> <td>236 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5190.00	64.47	74.00	-9.53	52.37	34.62	10.62	33.14	0.00	100	236 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5190.00</td> <td>101.46</td> <td>-----</td> <td>-----</td> <td>89.29</td> <td>34.65</td> <td>10.64</td> <td>33.12</td> <td>0.00</td> <td>100</td> <td>236 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5190.00	101.46	-----	-----	89.29	34.65	10.64	33.12	0.00	100	236 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5190.00	64.47	74.00	-9.53	52.37	34.62	10.62	33.14	0.00	100	236 PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5190.00	101.46	-----	-----	89.29	34.65	10.64	33.12	0.00	100	236 PEAK																																																																						
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5190.00</td> <td>48.56</td> <td>54.00</td> <td>-5.44</td> <td>36.46</td> <td>34.62</td> <td>10.62</td> <td>33.14</td> <td>0.00</td> <td>100</td> <td>236 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5190.00	48.56	54.00	-5.44	36.46	34.62	10.62	33.14	0.00	100	236 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5190.00</td> <td>91.97</td> <td>-----</td> <td>-----</td> <td>79.79</td> <td>34.66</td> <td>10.64</td> <td>33.12</td> <td>0.00</td> <td>100</td> <td>236 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5190.00	91.97	-----	-----	79.79	34.66	10.64	33.12	0.00	100	236 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5190.00	48.56	54.00	-5.44	36.46	34.62	10.62	33.14	0.00	100	236 AVERAGE																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5190.00	91.97	-----	-----	79.79	34.66	10.64	33.12	0.00	100	236 AVERAGE																																																																						



	19																																										
Mode	Band Edge - R																																										
	U-NII-1_5.15-5.25_802.11ac VHT40_CH38_5190MHz																																										
ANT	4																																										
Pol.	Horizontal	Fundamental																																									
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5456.49</td> <td>53.09</td> <td>74.00</td> <td>-20.91</td> <td>40.29</td> <td>34.87</td> <td>10.97</td> <td>33.04</td> <td>0.00</td> <td>100</td> <td>236</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5456.49	53.09	74.00	-20.91	40.29	34.87	10.97	33.04	0.00	100	236	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																		
1	5456.49	53.09	74.00	-20.91	40.29	34.87	10.97	33.04	0.00	100	236	PEAK																															
Blank																																											
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5353.62</td> <td>41.52</td> <td>54.00</td> <td>-12.48</td> <td>28.98</td> <td>34.78</td> <td>10.83</td> <td>33.07</td> <td>0.00</td> <td>100</td> <td>236</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5353.62	41.52	54.00	-12.48	28.98	34.78	10.83	33.07	0.00	100	236	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																		
1	5353.62	41.52	54.00	-12.48	28.98	34.78	10.83	33.07	0.00	100	236	AVERAGE																															
Blank																																											

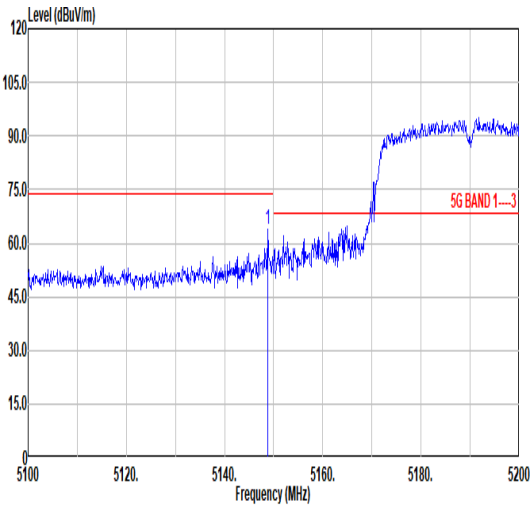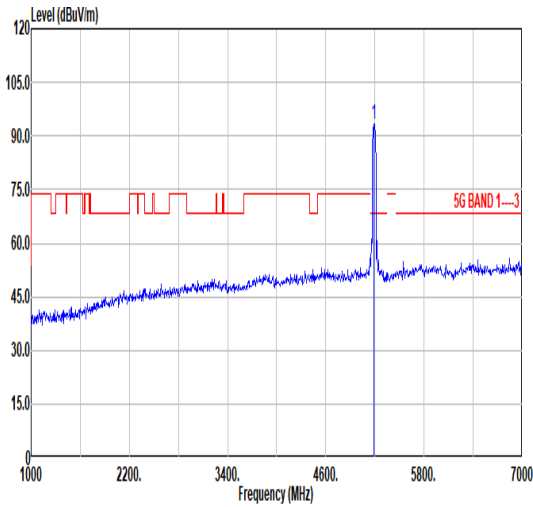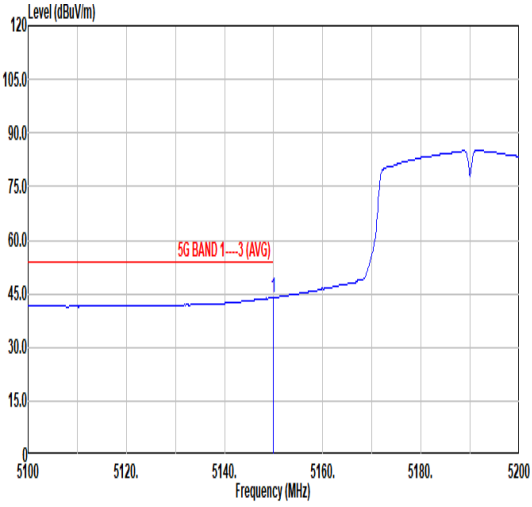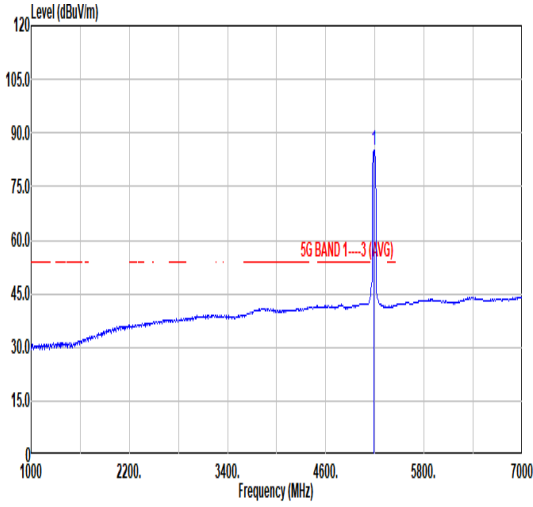

	19																																																																																			
Mode	Band Edge - L																																																																																			
	U-NII-1_5.15-5.25_802.11ac VHT40_CH38_5190MHz																																																																																			
ANT	4																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	 <table border="1" data-bbox="279 1108 813 1243"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.80</td> <td>64.07</td> <td>74.00</td> <td>-9.93</td> <td>51.97</td> <td>34.62</td> <td>10.62</td> <td>33.14</td> <td>0.00</td> <td>100</td> <td>32</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5148.80	64.07	74.00	-9.93	51.97	34.62	10.62	33.14	0.00	100	32	PEAK	 <table border="1" data-bbox="885 1108 1420 1243"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>93.36</td> <td>-----</td> <td>-----</td> <td>81.18</td> <td>34.66</td> <td>10.64</td> <td>33.12</td> <td>0.00</td> <td>100</td> <td>32</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	93.36	-----	-----	81.18	34.66	10.64	33.12	0.00	100	32	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5148.80	64.07	74.00	-9.93	51.97	34.62	10.62	33.14	0.00	100	32	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5190.00	93.36	-----	-----	81.18	34.66	10.64	33.12	0.00	100	32	PEAK																																																																								
Avg	 <table border="1" data-bbox="279 1792 813 1926"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>43.97</td> <td>54.00</td> <td>-10.03</td> <td>31.87</td> <td>34.62</td> <td>10.62</td> <td>33.14</td> <td>0.00</td> <td>100</td> <td>32</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5150.00	43.97	54.00	-10.03	31.87	34.62	10.62	33.14	0.00	100	32	AVERAGE	 <table border="1" data-bbox="885 1792 1420 1926"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>85.15</td> <td>-----</td> <td>-----</td> <td>72.97</td> <td>34.66</td> <td>10.64</td> <td>33.12</td> <td>0.00</td> <td>100</td> <td>32</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	85.15	-----	-----	72.97	34.66	10.64	33.12	0.00	100	32	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5150.00	43.97	54.00	-10.03	31.87	34.62	10.62	33.14	0.00	100	32	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5190.00	85.15	-----	-----	72.97	34.66	10.64	33.12	0.00	100	32	AVERAGE																																																																								



	19																																										
Mode	Band Edge - R																																										
	U-NII-1_5.15-5.25_802.11ac VHT40_CH38_5190MHz																																										
ANT	4																																										
Pol.	Vertical	Fundamental																																									
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5386.29</td> <td>51.11</td> <td>74.00</td> <td>-22.89</td> <td>38.49</td> <td>34.81</td> <td>10.87</td> <td>33.06</td> <td>0.00</td> <td>100</td> <td>32</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5386.29	51.11	74.00	-22.89	38.49	34.81	10.87	33.06	0.00	100	32	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																		
1	5386.29	51.11	74.00	-22.89	38.49	34.81	10.87	33.06	0.00	100	32	PEAK																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.73</td> <td>41.32</td> <td>54.00</td> <td>-12.68</td> <td>28.51</td> <td>34.87</td> <td>10.98</td> <td>33.04</td> <td>0.00</td> <td>100</td> <td>32</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.73	41.32	54.00	-12.68	28.51	34.87	10.98	33.04	0.00	100	32	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																		
1	5459.73	41.32	54.00	-12.68	28.51	34.87	10.98	33.04	0.00	100	32	AVERAGE																															



	19																																																																												
Mode	Harmonic																																																																												
	U-NII-1_5.15-5.25_802.11ac VHT40_CH38_5190MHz																																																																												
ANT	4																																																																												
Pol.	Horizontal	Vertical																																																																											
Peak Avg																																																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10380.00</td> <td>45.28</td> <td>68.30</td> <td>-23.02</td> <td>58.10</td> <td>38.07</td> <td>15.57</td> <td>66.46</td> <td>0.00</td> <td>300 0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10380.00	45.28	68.30	-23.02	58.10	38.07	15.57	66.46	0.00	300 0 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10380.00</td> <td>45.12</td> <td>68.30</td> <td>-23.18</td> <td>57.94</td> <td>38.07</td> <td>15.57</td> <td>66.46</td> <td>0.00</td> <td>100 0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10380.00	45.12	68.30	-23.18	57.94	38.07	15.57	66.46	0.00
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																				
1 10380.00	45.28	68.30	-23.02	58.10	38.07	15.57	66.46	0.00	300 0 PEAK																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																				
1 10380.00	45.12	68.30	-23.18	57.94	38.07	15.57	66.46	0.00	100 0 PEAK																																																																				







	20																																																																																			
Mode	Band Edge - L																																																																																			
	U-NII-1_5.15-5.25_802.11ac VHT40_CH46_5230MHz																																																																																			
ANT	4																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5146.97</td> <td>54.75</td> <td>74.00</td> <td>-19.25</td> <td>42.65</td> <td>34.62</td> <td>10.62</td> <td>33.14</td> <td>0.00</td> <td>100</td> <td>243</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5146.97	54.75	74.00	-19.25	42.65	34.62	10.62	33.14	0.00	100	243	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>100.83</td> <td>-----</td> <td>-----</td> <td>88.56</td> <td>34.69</td> <td>10.69</td> <td>33.11</td> <td>0.00</td> <td>100</td> <td>243</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5230.00	100.83	-----	-----	88.56	34.69	10.69	33.11	0.00	100	243	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5146.97	54.75	74.00	-19.25	42.65	34.62	10.62	33.14	0.00	100	243	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5230.00	100.83	-----	-----	88.56	34.69	10.69	33.11	0.00	100	243	PEAK																																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5147.43</td> <td>42.55</td> <td>54.00</td> <td>-11.45</td> <td>30.45</td> <td>34.62</td> <td>10.62</td> <td>33.14</td> <td>0.00</td> <td>100</td> <td>243</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5147.43	42.55	54.00	-11.45	30.45	34.62	10.62	33.14	0.00	100	243	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>92.52</td> <td>-----</td> <td>-----</td> <td>80.27</td> <td>34.68</td> <td>10.68</td> <td>33.11</td> <td>0.00</td> <td>100</td> <td>243</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5230.00	92.52	-----	-----	80.27	34.68	10.68	33.11	0.00	100	243	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5147.43	42.55	54.00	-11.45	30.45	34.62	10.62	33.14	0.00	100	243	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5230.00	92.52	-----	-----	80.27	34.68	10.68	33.11	0.00	100	243	AVERAGE																																																																								



	20																																										
Mode	Band Edge - R																																										
	U-NII-1_5.15-5.25_802.11ac VHT40_CH46_5230MHz																																										
ANT	4																																										
Pol.	Horizontal	Fundamental																																									
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5366.85</td> <td>52.65</td> <td>74.00</td> <td>-21.35</td> <td>40.08</td> <td>34.79</td> <td>10.85</td> <td>33.07</td> <td>0.00</td> <td>100</td> <td>243</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5366.85	52.65	74.00	-21.35	40.08	34.79	10.85	33.07	0.00	100	243	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																		
1	5366.85	52.65	74.00	-21.35	40.08	34.79	10.85	33.07	0.00	100	243	PEAK																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5352.36</td> <td>41.95</td> <td>54.00</td> <td>-12.05</td> <td>29.41</td> <td>34.78</td> <td>10.83</td> <td>33.07</td> <td>0.00</td> <td>100</td> <td>243</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5352.36	41.95	54.00	-12.05	29.41	34.78	10.83	33.07	0.00	100	243	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																		
1	5352.36	41.95	54.00	-12.05	29.41	34.78	10.83	33.07	0.00	100	243	AVERAGE																															

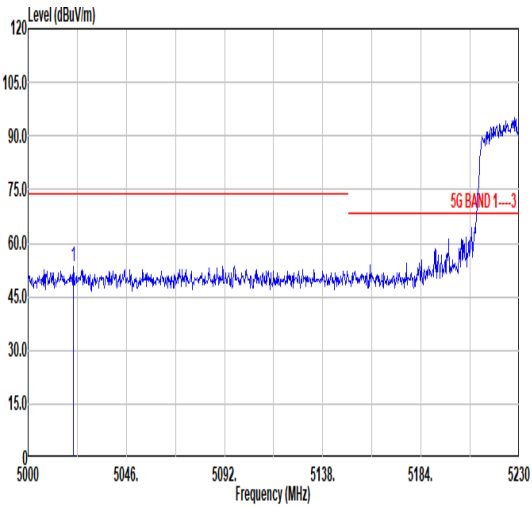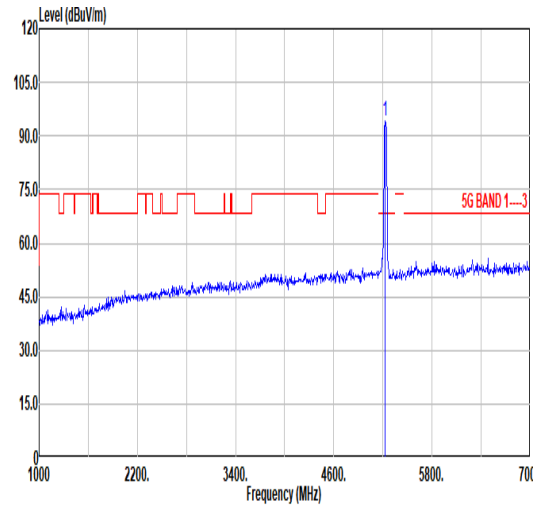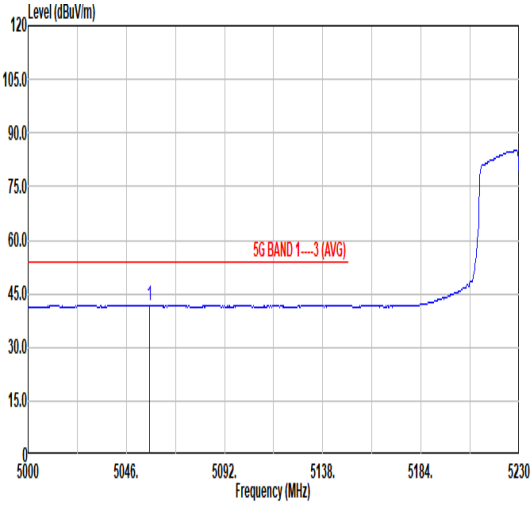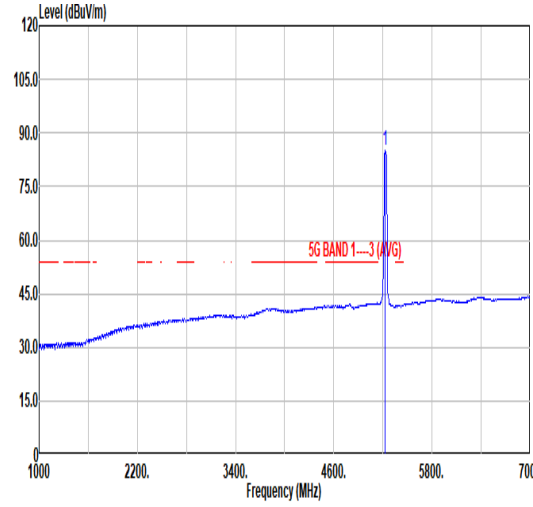

	20																																																																															
Mode	Band Edge - L																																																																															
	U-NII-1_5.15-5.25_802.11ac VHT40_CH46_5230MHz																																																																															
ANT	4																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	 <table border="1" data-bbox="279 1108 813 1243"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5021.16</td> <td>53.52</td> <td>74.00</td> <td>-20.48</td> <td>41.61</td> <td>34.52</td> <td>10.57</td> <td>33.18</td> <td>0.00</td> <td>100</td> <td>30 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5021.16	53.52	74.00	-20.48	41.61	34.52	10.57	33.18	0.00	100	30 PEAK	 <table border="1" data-bbox="877 1108 1412 1243"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5230.00</td> <td>94.23</td> <td>-----</td> <td>-----</td> <td>81.98</td> <td>34.68</td> <td>10.68</td> <td>33.11</td> <td>0.00</td> <td>100</td> <td>30 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5230.00	94.23	-----	-----	81.98	34.68	10.68	33.11	0.00	100	30 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5021.16	53.52	74.00	-20.48	41.61	34.52	10.57	33.18	0.00	100	30 PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5230.00	94.23	-----	-----	81.98	34.68	10.68	33.11	0.00	100	30 PEAK																																																																						
Avg	 <table border="1" data-bbox="279 1792 813 1926"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5056.81</td> <td>41.66</td> <td>54.00</td> <td>-12.34</td> <td>29.70</td> <td>34.55</td> <td>10.58</td> <td>33.17</td> <td>0.00</td> <td>100</td> <td>30 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5056.81	41.66	54.00	-12.34	29.70	34.55	10.58	33.17	0.00	100	30 AVERAGE	 <table border="1" data-bbox="877 1792 1412 1926"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5230.00</td> <td>85.21</td> <td>-----</td> <td>-----</td> <td>72.96</td> <td>34.68</td> <td>10.68</td> <td>33.11</td> <td>0.00</td> <td>100</td> <td>30 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5230.00	85.21	-----	-----	72.96	34.68	10.68	33.11	0.00	100	30 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5056.81	41.66	54.00	-12.34	29.70	34.55	10.58	33.17	0.00	100	30 AVERAGE																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5230.00	85.21	-----	-----	72.96	34.68	10.68	33.11	0.00	100	30 AVERAGE																																																																						



	20																																								
Mode	Band Edge - R																																								
	U-NII-1_5.15-5.25_802.11ac VHT40_CH46_5230MHz																																								
ANT	4																																								
Pol.	Vertical	Fundamental																																							
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5458.85</td> <td>52.64</td> <td>74.00</td> <td>-21.36</td> <td>39.83</td> <td>34.87</td> <td>10.98</td> <td>33.04</td> <td>0.00</td> <td>100</td> <td>30 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5458.85	52.64	74.00	-21.36	39.83	34.87	10.98	33.04	0.00	100	30 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1 5458.85	52.64	74.00	-21.36	39.83	34.87	10.98	33.04	0.00	100	30 PEAK																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5457.24</td> <td>41.42</td> <td>54.00</td> <td>-12.58</td> <td>28.61</td> <td>34.87</td> <td>10.98</td> <td>33.04</td> <td>0.00</td> <td>100</td> <td>30 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5457.24	41.42	54.00	-12.58	28.61	34.87	10.98	33.04	0.00	100	30 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1 5457.24	41.42	54.00	-12.58	28.61	34.87	10.98	33.04	0.00	100	30 AVERAGE																															



	20																																																																												
Mode	Harmonic																																																																												
	U-NII-1_5.15-5.25_802.11ac VHT40_CH46_5230MHz																																																																												
ANT	4																																																																												
Pol.	Horizontal	Vertical																																																																											
Peak Avg																																																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10460.00</td> <td>45.61</td> <td>68.30</td> <td>-22.69</td> <td>58.24</td> <td>38.12</td> <td>15.61</td> <td>66.36</td> <td>0.00</td> <td>300 0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10460.00	45.61	68.30	-22.69	58.24	38.12	15.61	66.36	0.00	300 0 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10460.00</td> <td>45.27</td> <td>68.30</td> <td>-23.03</td> <td>57.90</td> <td>38.12</td> <td>15.61</td> <td>66.36</td> <td>0.00</td> <td>100 0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10460.00	45.27	68.30	-23.03	57.90	38.12	15.61	66.36	0.00
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																				
1 10460.00	45.61	68.30	-22.69	58.24	38.12	15.61	66.36	0.00	300 0 PEAK																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																				
1 10460.00	45.27	68.30	-23.03	57.90	38.12	15.61	66.36	0.00	100 0 PEAK																																																																				







	21																																																																																			
Mode	Band Edge - L																																																																																			
	U-NII-2A_5.25-5.35_802.11ac_VHT40_CH54_5270MHz																																																																																			
ANT	4																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5085.05</td> <td>54.42</td> <td>74.00</td> <td>-19.58</td> <td>42.42</td> <td>34.57</td> <td>10.59</td> <td>33.16</td> <td>0.00</td> <td>100</td> <td>249</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5085.05	54.42	74.00	-19.58	42.42	34.57	10.59	33.16	0.00	100	249	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>100.12</td> <td>-----</td> <td>-----</td> <td>87.78</td> <td>34.71</td> <td>10.73</td> <td>33.10</td> <td>0.00</td> <td>100</td> <td>249</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5270.00	100.12	-----	-----	87.78	34.71	10.73	33.10	0.00	100	249	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5085.05	54.42	74.00	-19.58	42.42	34.57	10.59	33.16	0.00	100	249	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5270.00	100.12	-----	-----	87.78	34.71	10.73	33.10	0.00	100	249	PEAK																																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5145.26</td> <td>42.00</td> <td>54.00</td> <td>-12.00</td> <td>29.90</td> <td>34.62</td> <td>10.62</td> <td>33.14</td> <td>0.00</td> <td>100</td> <td>249</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5145.26	42.00	54.00	-12.00	29.90	34.62	10.62	33.14	0.00	100	249	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>91.81</td> <td>-----</td> <td>-----</td> <td>79.47</td> <td>34.71</td> <td>10.73</td> <td>33.10</td> <td>0.00</td> <td>100</td> <td>249</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5270.00	91.81	-----	-----	79.47	34.71	10.73	33.10	0.00	100	249	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5145.26	42.00	54.00	-12.00	29.90	34.62	10.62	33.14	0.00	100	249	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5270.00	91.81	-----	-----	79.47	34.71	10.73	33.10	0.00	100	249	AVERAGE																																																																								



	21																																										
Mode	Band Edge - R																																										
	U-NII-2A_5.25-5.35_802.11ac_VHT40_CH54_5270MHz																																										
ANT	4																																										
Pol.	Horizontal	Fundamental																																									
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5396.54</td> <td>53.21</td> <td>74.00</td> <td>-20.79</td> <td>40.56</td> <td>34.82</td> <td>10.89</td> <td>33.06</td> <td>0.00</td> <td>100</td> <td>249</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5396.54	53.21	74.00	-20.79	40.56	34.82	10.89	33.06	0.00	100	249	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																		
1	5396.54	53.21	74.00	-20.79	40.56	34.82	10.89	33.06	0.00	100	249	PEAK																															
Blank																																											
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5353.03</td> <td>42.18</td> <td>54.00</td> <td>-11.82</td> <td>29.64</td> <td>34.78</td> <td>10.83</td> <td>33.07</td> <td>0.00</td> <td>100</td> <td>249</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5353.03	42.18	54.00	-11.82	29.64	34.78	10.83	33.07	0.00	100	249	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																		
1	5353.03	42.18	54.00	-11.82	29.64	34.78	10.83	33.07	0.00	100	249	AVERAGE																															
Blank																																											

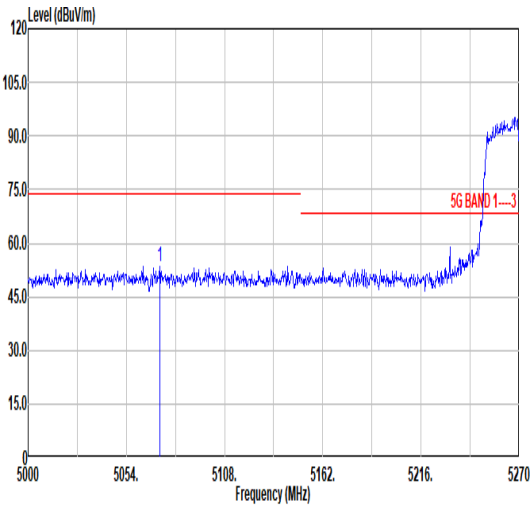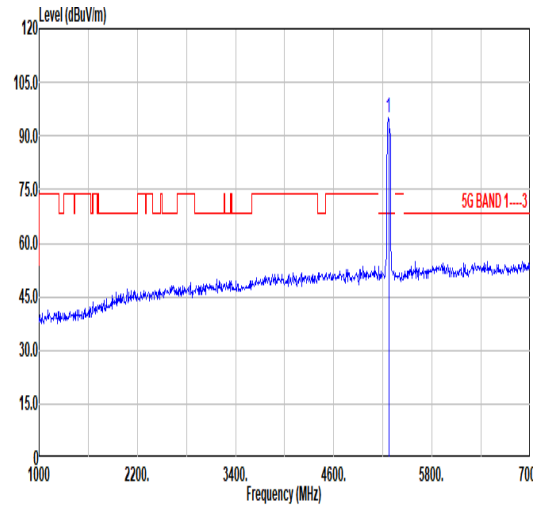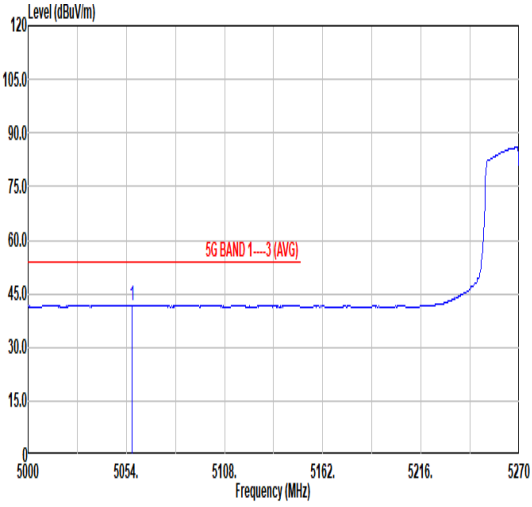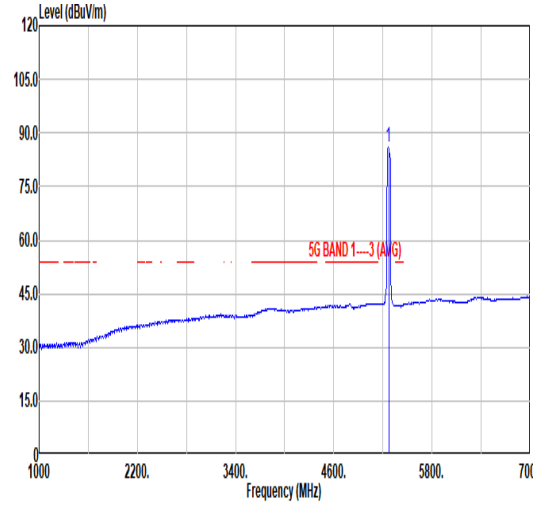

	21																																																																																			
Mode	Band Edge - L																																																																																			
	U-NII-2A_5.25-5.35_802.11ac_VHT40_CH54_5270MHz																																																																																			
ANT	4																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	 <table border="1" data-bbox="279 1108 813 1243"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5072.36</td> <td>53.40</td> <td>74.00</td> <td>-20.60</td> <td>41.42</td> <td>34.56</td> <td>10.59</td> <td>33.17</td> <td>0.00</td> <td>100</td> <td>35</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5072.36	53.40	74.00	-20.60	41.42	34.56	10.59	33.17	0.00	100	35	PEAK	 <table border="1" data-bbox="877 1108 1412 1243"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>94.96</td> <td>-----</td> <td>-----</td> <td>82.62</td> <td>34.71</td> <td>10.73</td> <td>33.10</td> <td>0.00</td> <td>100</td> <td>35</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5270.00	94.96	-----	-----	82.62	34.71	10.73	33.10	0.00	100	35	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5072.36	53.40	74.00	-20.60	41.42	34.56	10.59	33.17	0.00	100	35	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5270.00	94.96	-----	-----	82.62	34.71	10.73	33.10	0.00	100	35	PEAK																																																																								
Avg	 <table border="1" data-bbox="279 1792 813 1926"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5057.24</td> <td>41.69</td> <td>54.00</td> <td>-12.31</td> <td>29.73</td> <td>34.55</td> <td>10.58</td> <td>33.17</td> <td>0.00</td> <td>100</td> <td>35</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5057.24	41.69	54.00	-12.31	29.73	34.55	10.58	33.17	0.00	100	35	AVERAGE	 <table border="1" data-bbox="877 1792 1412 1926"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>85.93</td> <td>-----</td> <td>-----</td> <td>73.59</td> <td>34.71</td> <td>10.73</td> <td>33.10</td> <td>0.00</td> <td>100</td> <td>35</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5270.00	85.93	-----	-----	73.59	34.71	10.73	33.10	0.00	100	35	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5057.24	41.69	54.00	-12.31	29.73	34.55	10.58	33.17	0.00	100	35	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5270.00	85.93	-----	-----	73.59	34.71	10.73	33.10	0.00	100	35	AVERAGE																																																																								



	21																																										
Mode	Band Edge - R																																										
	U-NII-2A_5.25-5.35_802.11ac_VHT40_CH54_5270MHz																																										
ANT	4																																										
Pol.	Vertical	Fundamental																																									
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5375.83</td> <td>52.27</td> <td>74.00</td> <td>-21.73</td> <td>39.68</td> <td>34.80</td> <td>10.86</td> <td>33.07</td> <td>0.00</td> <td>100</td> <td>35</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5375.83	52.27	74.00	-21.73	39.68	34.80	10.86	33.07	0.00	100	35	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																		
1	5375.83	52.27	74.00	-21.73	39.68	34.80	10.86	33.07	0.00	100	35	PEAK																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5456.58</td> <td>41.46</td> <td>54.00</td> <td>-12.54</td> <td>28.66</td> <td>34.87</td> <td>10.97</td> <td>33.04</td> <td>0.00</td> <td>100</td> <td>35</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5456.58	41.46	54.00	-12.54	28.66	34.87	10.97	33.04	0.00	100	35	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																		
1	5456.58	41.46	54.00	-12.54	28.66	34.87	10.97	33.04	0.00	100	35	AVERAGE																															



	21																																																																												
Mode	Harmonic																																																																												
	U-NII-2A_5.25-5.35_802.11ac_VHT40_CH54_5270MHz																																																																												
ANT	4																																																																												
Pol.	Horizontal	Vertical																																																																											
Peak Avg																																																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10540.00</td> <td>45.69</td> <td>68.30</td> <td>-22.61</td> <td>58.13</td> <td>38.18</td> <td>15.65</td> <td>66.27</td> <td>0.00</td> <td>300 0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10540.00	45.69	68.30	-22.61	58.13	38.18	15.65	66.27	0.00	300 0 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10540.00</td> <td>45.61</td> <td>68.30</td> <td>-22.69</td> <td>58.05</td> <td>38.18</td> <td>15.65</td> <td>66.27</td> <td>0.00</td> <td>100 0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10540.00	45.61	68.30	-22.69	58.05	38.18	15.65	66.27	0.00
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																				
1 10540.00	45.69	68.30	-22.61	58.13	38.18	15.65	66.27	0.00	300 0 PEAK																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																				
1 10540.00	45.61	68.30	-22.69	58.05	38.18	15.65	66.27	0.00	100 0 PEAK																																																																				







	22																																																																																			
Mode	Band Edge - L																																																																																			
	U-NII-2A_5.25-5.35_802.11ac_VHT40_CH62_5310MHz																																																																																			
ANT	4																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5083.08</td> <td>53.67</td> <td>74.00</td> <td>-20.33</td> <td>41.68</td> <td>34.57</td> <td>10.59</td> <td>33.17</td> <td>0.00</td> <td>100</td> <td>262</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5083.08	53.67	74.00	-20.33	41.68	34.57	10.59	33.17	0.00	100	262	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>100.83</td> <td>-----</td> <td>-----</td> <td>88.38</td> <td>34.75</td> <td>10.79</td> <td>33.09</td> <td>0.00</td> <td>100</td> <td>262</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5310.00	100.83	-----	-----	88.38	34.75	10.79	33.09	0.00	100	262	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5083.08	53.67	74.00	-20.33	41.68	34.57	10.59	33.17	0.00	100	262	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5310.00	100.83	-----	-----	88.38	34.75	10.79	33.09	0.00	100	262	PEAK																																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5145.70</td> <td>41.95</td> <td>54.00</td> <td>-12.05</td> <td>29.85</td> <td>34.62</td> <td>10.62</td> <td>33.14</td> <td>0.00</td> <td>100</td> <td>262</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5145.70	41.95	54.00	-12.05	29.85	34.62	10.62	33.14	0.00	100	262	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>91.92</td> <td>-----</td> <td>-----</td> <td>79.47</td> <td>34.75</td> <td>10.79</td> <td>33.09</td> <td>0.00</td> <td>100</td> <td>262</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5310.00	91.92	-----	-----	79.47	34.75	10.79	33.09	0.00	100	262	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5145.70	41.95	54.00	-12.05	29.85	34.62	10.62	33.14	0.00	100	262	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5310.00	91.92	-----	-----	79.47	34.75	10.79	33.09	0.00	100	262	AVERAGE																																																																								



	22																																						
Mode	Band Edge - R																																						
	U-NII-2A_5.25-5.35_802.11ac_VHT40_CH62_5310MHz																																						
ANT	4																																						
Pol.	Horizontal	Fundamental																																					
Peak																																							
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5350.80</td> <td>56.96</td> <td>74.00</td> <td>-17.04</td> <td>44.42</td> <td>34.78</td> <td>10.83</td> <td>33.07</td> <td>0.00</td> <td>100 262 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5350.80	56.96	74.00	-17.04	44.42	34.78	10.83	33.07	0.00
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																														
1 5350.80	56.96	74.00	-17.04	44.42	34.78	10.83	33.07	0.00	100 262 PEAK																														
Avg																																							
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5350.05</td> <td>44.90</td> <td>54.00</td> <td>-9.10</td> <td>32.36</td> <td>34.78</td> <td>10.83</td> <td>33.07</td> <td>0.00</td> <td>100 262 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5350.05	44.90	54.00	-9.10	32.36	34.78	10.83	33.07	0.00
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																														
1 5350.05	44.90	54.00	-9.10	32.36	34.78	10.83	33.07	0.00	100 262 AVERAGE																														

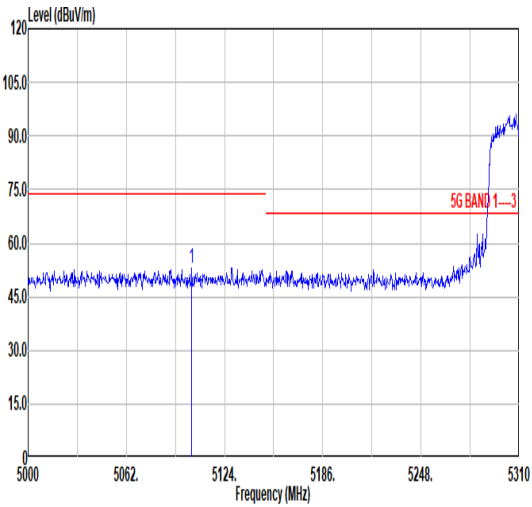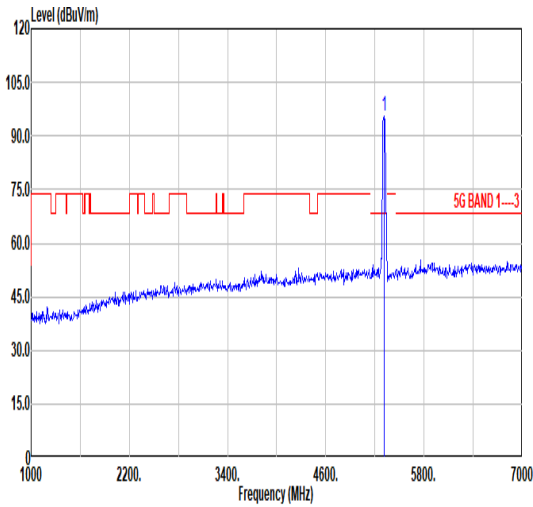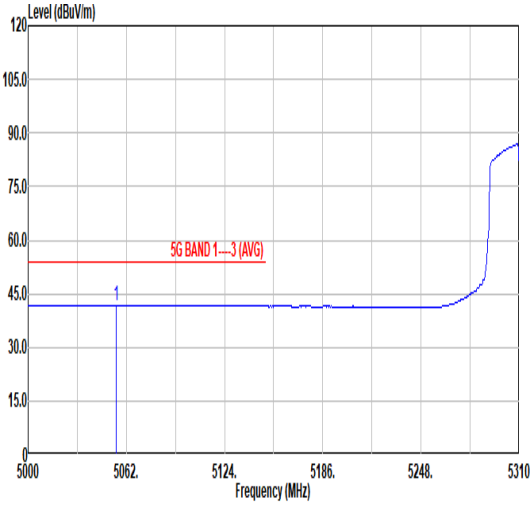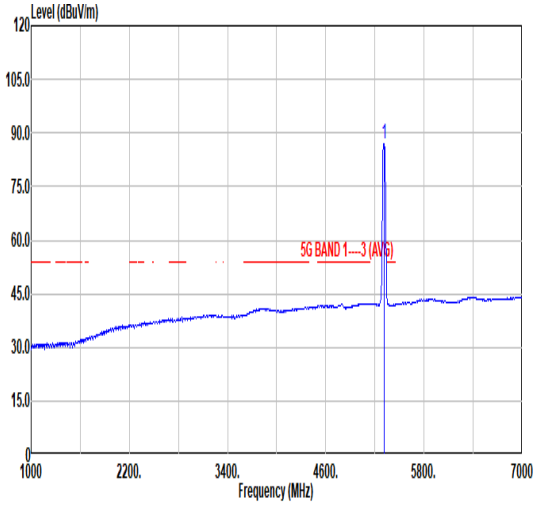

	22																																																																																			
Mode	Band Edge - L																																																																																			
	U-NII-2A_5.25-5.35_802.11ac_VHT40_CH62_5310MHz																																																																																			
ANT	4																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	 <table border="1" data-bbox="279 1108 813 1243"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5103.23</td> <td>53.05</td> <td>74.00</td> <td>-20.95</td> <td>41.03</td> <td>34.58</td> <td>10.60</td> <td>33.16</td> <td>0.00</td> <td>105</td> <td>32</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5103.23	53.05	74.00	-20.95	41.03	34.58	10.60	33.16	0.00	105	32	PEAK	 <table border="1" data-bbox="885 1108 1420 1243"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>95.65</td> <td>-----</td> <td>-----</td> <td>83.20</td> <td>34.75</td> <td>10.79</td> <td>33.09</td> <td>0.00</td> <td>105</td> <td>32</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5310.00	95.65	-----	-----	83.20	34.75	10.79	33.09	0.00	105	32	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5103.23	53.05	74.00	-20.95	41.03	34.58	10.60	33.16	0.00	105	32	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5310.00	95.65	-----	-----	83.20	34.75	10.79	33.09	0.00	105	32	PEAK																																																																								
Avg	 <table border="1" data-bbox="279 1792 813 1926"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5055.49</td> <td>41.79</td> <td>54.00</td> <td>-12.21</td> <td>29.84</td> <td>34.54</td> <td>10.58</td> <td>33.17</td> <td>0.00</td> <td>105</td> <td>32</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5055.49	41.79	54.00	-12.21	29.84	34.54	10.58	33.17	0.00	105	32	AVERAGE	 <table border="1" data-bbox="885 1792 1420 1926"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>86.96</td> <td>-----</td> <td>-----</td> <td>74.52</td> <td>34.75</td> <td>10.78</td> <td>33.09</td> <td>0.00</td> <td>105</td> <td>32</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5310.00	86.96	-----	-----	74.52	34.75	10.78	33.09	0.00	105	32	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5055.49	41.79	54.00	-12.21	29.84	34.54	10.58	33.17	0.00	105	32	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5310.00	86.96	-----	-----	74.52	34.75	10.78	33.09	0.00	105	32	AVERAGE																																																																								



	22																																						
Mode	Band Edge - R																																						
	U-NII-2A_5.25-5.35_802.11ac_VHT40_CH62_5310MHz																																						
ANT	4																																						
Pol.	Vertical	Fundamental																																					
Peak																																							
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5350.95</td> <td>52.90</td> <td>74.00</td> <td>-21.10</td> <td>40.36</td> <td>34.78</td> <td>10.83</td> <td>33.07</td> <td>0.00</td> <td>105 32 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5350.95	52.90	74.00	-21.10	40.36	34.78	10.83	33.07	0.00
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																														
1 5350.95	52.90	74.00	-21.10	40.36	34.78	10.83	33.07	0.00	105 32 PEAK																														
Avg																																							
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5350.05</td> <td>42.36</td> <td>54.00</td> <td>-11.64</td> <td>29.82</td> <td>34.78</td> <td>10.83</td> <td>33.07</td> <td>0.00</td> <td>105 32 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5350.05	42.36	54.00	-11.64	29.82	34.78	10.83	33.07	0.00
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																														
1 5350.05	42.36	54.00	-11.64	29.82	34.78	10.83	33.07	0.00	105 32 AVERAGE																														



	22																																																																																
Mode	Harmonic																																																																																
	U-NII-2A_5.25-5.35_802.11ac_VHT40_CH62_5310MHz																																																																																
ANT	4																																																																																
Pol.	Horizontal	Vertical																																																																															
Peak Avg																																																																																	
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10620.00</td> <td>45.31</td> <td>74.00</td> <td>-28.69</td> <td>57.56</td> <td>38.23</td> <td>15.69</td> <td>66.17</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10620.00	45.31	74.00	-28.69	57.56	38.23	15.69	66.17	0.00	300	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10620.00</td> <td>44.94</td> <td>74.00</td> <td>-29.06</td> <td>57.19</td> <td>38.23</td> <td>15.69</td> <td>66.17</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10620.00	44.94	74.00	-29.06	57.19	38.23	15.69	66.17	0.00	100	0
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1 10620.00	45.31	74.00	-28.69	57.56	38.23	15.69	66.17	0.00	300	0	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1 10620.00	44.94	74.00	-29.06	57.19	38.23	15.69	66.17	0.00	100	0	PEAK																																																																						







	23																																																																																																
Mode	Band Edge - L																																																																																																
	U-NII-2C_5.47-5.725_802.11ac_VHT40_CH102_5510MHz																																																																																																
ANT	4																																																																																																
Pol.	Horizontal	Fundamental																																																																																															
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.92</td> <td>60.26</td> <td>74.00</td> <td>-13.74</td> <td>47.45</td> <td>34.87</td> <td>10.98</td> <td>33.04</td> <td>0.00</td> <td>100</td> <td>262</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5466.48</td> <td>65.14</td> <td>68.30</td> <td>-3.16</td> <td>52.31</td> <td>34.87</td> <td>10.99</td> <td>33.03</td> <td>0.00</td> <td>100</td> <td>262</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.92	60.26	74.00	-13.74	47.45	34.87	10.98	33.04	0.00	100	262	PEAK	2	5466.48	65.14	68.30	-3.16	52.31	34.87	10.99	33.03	0.00	100	262	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>101.38</td> <td>-----</td> <td>-----</td> <td>88.43</td> <td>34.91</td> <td>11.06</td> <td>33.02</td> <td>0.00</td> <td>100</td> <td>262</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	101.38	-----	-----	88.43	34.91	11.06	33.02	0.00	100	262	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5459.92	60.26	74.00	-13.74	47.45	34.87	10.98	33.04	0.00	100	262	PEAK																																																																																					
2	5466.48	65.14	68.30	-3.16	52.31	34.87	10.99	33.03	0.00	100	262	PEAK																																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5510.00	101.38	-----	-----	88.43	34.91	11.06	33.02	0.00	100	262	PEAK																																																																																					
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.92</td> <td>45.32</td> <td>54.00</td> <td>-8.68</td> <td>32.51</td> <td>34.87</td> <td>10.98</td> <td>33.04</td> <td>0.00</td> <td>100</td> <td>262</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.92	45.32	54.00	-8.68	32.51	34.87	10.98	33.04	0.00	100	262	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>92.46</td> <td>-----</td> <td>-----</td> <td>79.52</td> <td>34.91</td> <td>11.05</td> <td>33.02</td> <td>0.00</td> <td>100</td> <td>262</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	92.46	-----	-----	79.52	34.91	11.05	33.02	0.00	100	262	AVERAGE													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5459.92	45.32	54.00	-8.68	32.51	34.87	10.98	33.04	0.00	100	262	AVERAGE																																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5510.00	92.46	-----	-----	79.52	34.91	11.05	33.02	0.00	100	262	AVERAGE																																																																																					



Mode	23																																								
	Band Edge - R																																								
	U-NII-2C_5.47-5.725_802.11ac_VHT40_CH102_5510MHz																																								
ANT	4																																								
Pol.	Horizontal	Fundamental																																							
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5763.73</td> <td>53.76</td> <td>68.30</td> <td>-14.54</td> <td>40.14</td> <td>35.21</td> <td>11.35</td> <td>32.94</td> <td>0.00</td> <td>100 262</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5763.73	53.76	68.30	-14.54	40.14	35.21	11.35	32.94	0.00	100 262	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1 5763.73	53.76	68.30	-14.54	40.14	35.21	11.35	32.94	0.00	100 262	PEAK																															

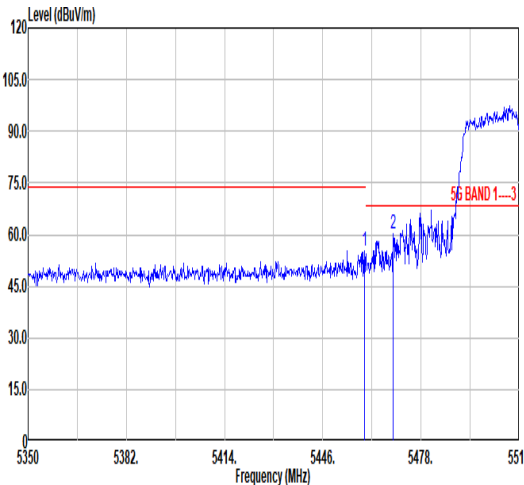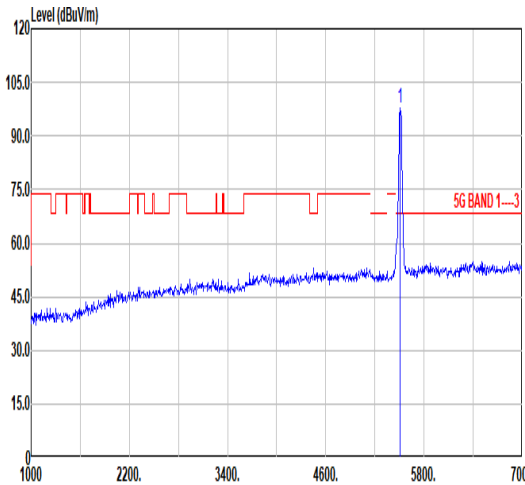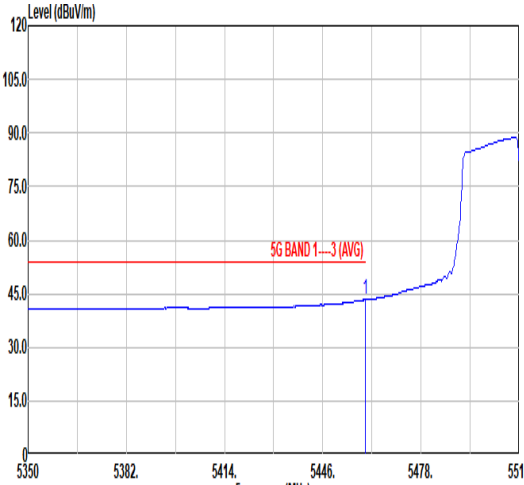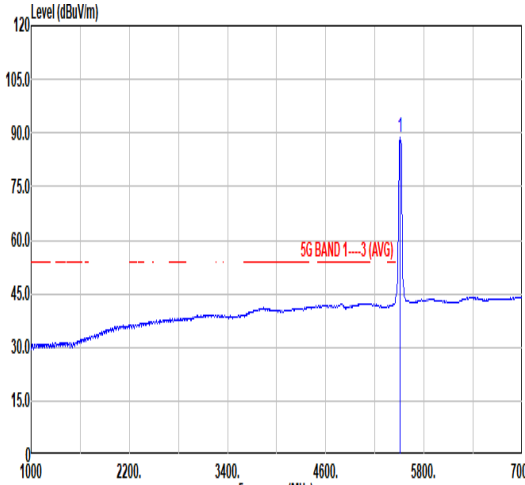

	23																																																																																																			
Mode	Band Edge - L																																																																																																			
	U-NII-2C_5.47-5.725_802.11ac_VHT40_CH102_5510MHz																																																																																																			
ANT	4																																																																																																			
Pol.	Vertical	Fundamental																																																																																																		
Peak	 <table border="1" data-bbox="279 1086 805 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.60</td> <td>55.36</td> <td>74.00</td> <td>-18.64</td> <td>42.55</td> <td>34.87</td> <td>10.98</td> <td>33.04</td> <td>0.00</td> <td>100</td> <td>34 PEAK</td> </tr> <tr> <td>2</td> <td>5468.88</td> <td>60.00</td> <td>68.30</td> <td>-8.30</td> <td>47.16</td> <td>34.88</td> <td>10.99</td> <td>33.03</td> <td>0.00</td> <td>100</td> <td>34 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.60	55.36	74.00	-18.64	42.55	34.87	10.98	33.04	0.00	100	34 PEAK	2	5468.88	60.00	68.30	-8.30	47.16	34.88	10.99	33.03	0.00	100	34 PEAK	 <table border="1" data-bbox="885 1086 1412 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>97.92</td> <td>-----</td> <td>-----</td> <td>84.98</td> <td>34.91</td> <td>11.05</td> <td>33.02</td> <td>0.00</td> <td>100</td> <td>34 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	97.92	-----	-----	84.98	34.91	11.05	33.02	0.00	100	34 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5459.60	55.36	74.00	-18.64	42.55	34.87	10.98	33.04	0.00	100	34 PEAK																																																																																									
2	5468.88	60.00	68.30	-8.30	47.16	34.88	10.99	33.03	0.00	100	34 PEAK																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5510.00	97.92	-----	-----	84.98	34.91	11.05	33.02	0.00	100	34 PEAK																																																																																									
Avg	 <table border="1" data-bbox="279 1769 805 1926"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.76</td> <td>43.35</td> <td>54.00</td> <td>-10.65</td> <td>30.54</td> <td>34.87</td> <td>10.98</td> <td>33.04</td> <td>0.00</td> <td>100</td> <td>34 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.76	43.35	54.00	-10.65	30.54	34.87	10.98	33.04	0.00	100	34 AVERAGE	 <table border="1" data-bbox="885 1769 1412 1926"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>88.58</td> <td>-----</td> <td>-----</td> <td>75.64</td> <td>34.91</td> <td>11.05</td> <td>33.02</td> <td>0.00</td> <td>100</td> <td>34 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	88.58	-----	-----	75.64	34.91	11.05	33.02	0.00	100	34 AVERAGE												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5459.76	43.35	54.00	-10.65	30.54	34.87	10.98	33.04	0.00	100	34 AVERAGE																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5510.00	88.58	-----	-----	75.64	34.91	11.05	33.02	0.00	100	34 AVERAGE																																																																																									



Mode	23																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11ac_VHT40_CH102_5510MHz																																									
ANT	4																																									
Pol.	Vertical	Fundamental																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5759.90</td> <td>53.28</td> <td>68.30</td> <td>-15.02</td> <td>39.67</td> <td>35.20</td> <td>11.35</td> <td>32.94</td> <td>0.00</td> <td>100</td> <td>34</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5759.90	53.28	68.30	-15.02	39.67	35.20	11.35	32.94	0.00	100	34	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1 5759.90	53.28	68.30	-15.02	39.67	35.20	11.35	32.94	0.00	100	34	PEAK																															



	23																																																																																
Mode	Harmonic																																																																																
	U-NII-2C_5.47-5.725_802.11ac_VHT40_CH102_5510MHz																																																																																
ANT	4																																																																																
Pol.	Horizontal	Vertical																																																																															
Peak																																																																																	
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11020.00</td> <td>46.24</td> <td>74.00</td> <td>-27.76</td> <td>57.54</td> <td>38.51</td> <td>15.91</td> <td>65.72</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11020.00	46.24	74.00	-27.76	57.54	38.51	15.91	65.72	0.00	300	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11020.00</td> <td>45.57</td> <td>74.00</td> <td>-28.43</td> <td>56.87</td> <td>38.51</td> <td>15.91</td> <td>65.72</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11020.00	45.57	74.00	-28.43	56.87	38.51	15.91	65.72	0.00	100	0
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1 11020.00	46.24	74.00	-27.76	57.54	38.51	15.91	65.72	0.00	300	0	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1 11020.00	45.57	74.00	-28.43	56.87	38.51	15.91	65.72	0.00	100	0	PEAK																																																																						
Avg																																																																																	
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11020.00</td> <td>46.24</td> <td>74.00</td> <td>-27.76</td> <td>57.54</td> <td>38.51</td> <td>15.91</td> <td>65.72</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11020.00	46.24	74.00	-27.76	57.54	38.51	15.91	65.72	0.00	300	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11020.00</td> <td>45.57</td> <td>74.00</td> <td>-28.43</td> <td>56.87</td> <td>38.51</td> <td>15.91</td> <td>65.72</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11020.00	45.57	74.00	-28.43	56.87	38.51	15.91	65.72	0.00	100	0
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1 11020.00	46.24	74.00	-27.76	57.54	38.51	15.91	65.72	0.00	300	0	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1 11020.00	45.57	74.00	-28.43	56.87	38.51	15.91	65.72	0.00	100	0	PEAK																																																																						







	24																																																																																																						
Mode	Band Edge - L																																																																																																						
	U-NII-2C_5.47-5.725_802.11ac_VHT40_CH110_5550MHz																																																																																																						
ANT	4																																																																																																						
Pol.	Horizontal	Fundamental																																																																																																					
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5444.60</td> <td>53.82</td> <td>74.00</td> <td>-20.18</td> <td>41.04</td> <td>34.86</td> <td>10.96</td> <td>33.04</td> <td>0.00</td> <td>100</td> <td>246</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5468.20</td> <td>52.12</td> <td>68.30</td> <td>-16.18</td> <td>39.31</td> <td>34.87</td> <td>10.98</td> <td>33.04</td> <td>0.00</td> <td>100</td> <td>246</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5444.60	53.82	74.00	-20.18	41.04	34.86	10.96	33.04	0.00	100	246	PEAK	2	5468.20	52.12	68.30	-16.18	39.31	34.87	10.98	33.04	0.00	100	246	PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5550.00</td> <td>101.53</td> <td>-----</td> <td>-----</td> <td>88.45</td> <td>34.96</td> <td>11.12</td> <td>33.00</td> <td>0.00</td> <td>100</td> <td>246</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5550.00	101.53	-----	-----	88.45	34.96	11.12	33.00	0.00	100	246	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	5444.60	53.82	74.00	-20.18	41.04	34.86	10.96	33.04	0.00	100	246	PEAK																																																																																											
2	5468.20	52.12	68.30	-16.18	39.31	34.87	10.98	33.04	0.00	100	246	PEAK																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	5550.00	101.53	-----	-----	88.45	34.96	11.12	33.00	0.00	100	246	PEAK																																																																																											
Avg	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.00</td> <td>42.45</td> <td>54.00</td> <td>-11.55</td> <td>29.64</td> <td>34.87</td> <td>10.98</td> <td>33.04</td> <td>0.00</td> <td>100</td> <td>246</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.00	42.45	54.00	-11.55	29.64	34.87	10.98	33.04	0.00	100	246	AVERAGE	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5550.00</td> <td>93.34</td> <td>-----</td> <td>-----</td> <td>80.26</td> <td>34.96</td> <td>11.12</td> <td>33.00</td> <td>0.00</td> <td>100</td> <td>246</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5550.00	93.34	-----	-----	80.26	34.96	11.12	33.00	0.00	100	246	AVERAGE													
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	5459.00	42.45	54.00	-11.55	29.64	34.87	10.98	33.04	0.00	100	246	AVERAGE																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	5550.00	93.34	-----	-----	80.26	34.96	11.12	33.00	0.00	100	246	AVERAGE																																																																																											



Mode	24																																							
	Band Edge - R																																							
	U-NII-2C_5.47-5.725_802.11ac_VHT40_CH110_5550MHz																																							
ANT	4																																							
Pol.	Horizontal	Fundamental																																						
Peak	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>56 BAND 1---3</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5740.71</td> <td>55.34</td> <td>68.30</td> <td>-12.96</td> <td>41.79</td> <td>35.18</td> <td>11.32</td> <td>32.95</td> <td>0.00</td> <td>100 246 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5740.71	55.34	68.30	-12.96	41.79	35.18	11.32	32.95	0.00	100 246 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																															
1 5740.71	55.34	68.30	-12.96	41.79	35.18	11.32	32.95	0.00	100 246 PEAK																															

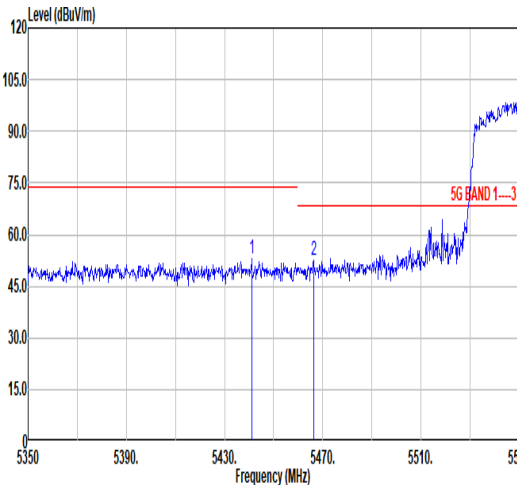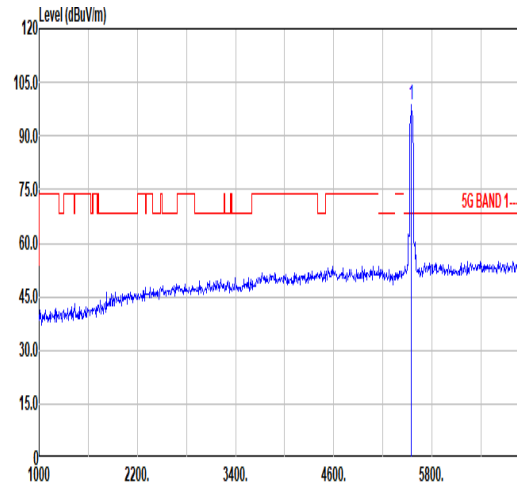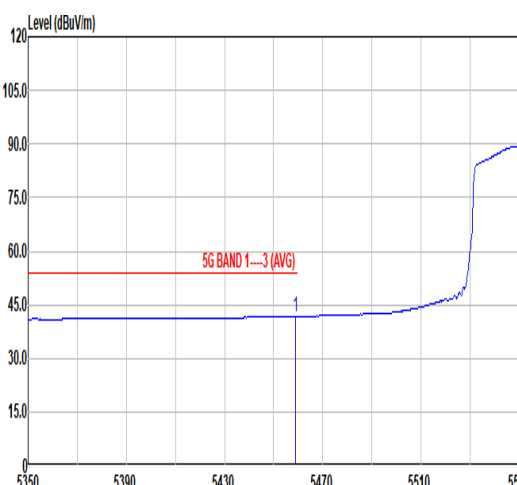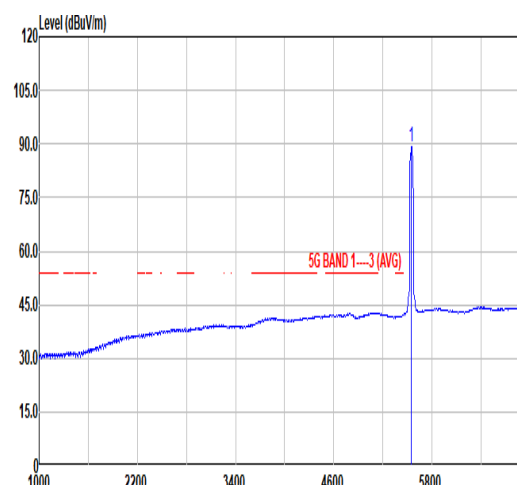

	24																																																																																																			
Mode	Band Edge - L																																																																																																			
	U-NII-2C_5.47-5.725_802.11ac_VHT40_CH110_5550MHz																																																																																																			
ANT	4																																																																																																			
Pol.	Vertical	Fundamental																																																																																																		
Peak	 <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5441.00</td> <td>52.82</td> <td>74.00</td> <td>-21.18</td> <td>40.06</td> <td>34.85</td> <td>10.95</td> <td>33.04</td> <td>0.00</td> <td>102</td> <td>21 PEAK</td> </tr> <tr> <td>2</td> <td>5466.20</td> <td>52.68</td> <td>68.30</td> <td>-15.62</td> <td>39.85</td> <td>34.87</td> <td>10.99</td> <td>33.03</td> <td>0.00</td> <td>102</td> <td>21 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5441.00	52.82	74.00	-21.18	40.06	34.85	10.95	33.04	0.00	102	21 PEAK	2	5466.20	52.68	68.30	-15.62	39.85	34.87	10.99	33.03	0.00	102	21 PEAK	 <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5550.00</td> <td>98.71</td> <td>-----</td> <td>-----</td> <td>85.65</td> <td>34.96</td> <td>11.11</td> <td>33.01</td> <td>0.00</td> <td>102</td> <td>21 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5550.00	98.71	-----	-----	85.65	34.96	11.11	33.01	0.00	102	21 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5441.00	52.82	74.00	-21.18	40.06	34.85	10.95	33.04	0.00	102	21 PEAK																																																																																									
2	5466.20	52.68	68.30	-15.62	39.85	34.87	10.99	33.03	0.00	102	21 PEAK																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5550.00	98.71	-----	-----	85.65	34.96	11.11	33.01	0.00	102	21 PEAK																																																																																									
Avg	 <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.00</td> <td>41.79</td> <td>54.00</td> <td>-12.21</td> <td>28.98</td> <td>34.87</td> <td>10.98</td> <td>33.04</td> <td>0.00</td> <td>102</td> <td>21 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5458.00	41.79	54.00	-12.21	28.98	34.87	10.98	33.04	0.00	102	21 AVERAGE	 <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5550.00</td> <td>89.41</td> <td>-----</td> <td>-----</td> <td>76.35</td> <td>34.96</td> <td>11.11</td> <td>33.01</td> <td>0.00</td> <td>102</td> <td>21 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5550.00	89.41	-----	-----	76.35	34.96	11.11	33.01	0.00	102	21 AVERAGE												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5458.00	41.79	54.00	-12.21	28.98	34.87	10.98	33.04	0.00	102	21 AVERAGE																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5550.00	89.41	-----	-----	76.35	34.96	11.11	33.01	0.00	102	21 AVERAGE																																																																																									



Mode	24																																							
	Band Edge - R																																							
	U-NII-2C_5.47-5.725_802.11ac_VHT40_CH110_5550MHz																																							
ANT	4																																							
Pol.	Vertical	Fundamental																																						
Peak	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>56 BAND 1---3</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5731.89</td> <td>54.15</td> <td>68.30</td> <td>-14.15</td> <td>40.61</td> <td>35.17</td> <td>11.32</td> <td>32.95</td> <td>0.00</td> <td>102 21 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5731.89	54.15	68.30	-14.15	40.61	35.17	11.32	32.95	0.00	102 21 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																															
1 5731.89	54.15	68.30	-14.15	40.61	35.17	11.32	32.95	0.00	102 21 PEAK																															



Mode	24																																																																																
	Harmonic																																																																																
	U-NII-2C_5.47-5.725_802.11ac_VHT40_CH110_5550MHz																																																																																
ANT	4																																																																																
Pol.	Horizontal	Vertical																																																																															
Peak Avg																																																																																	
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11100.00</td> <td>46.46</td> <td>74.00</td> <td>-27.54</td> <td>57.61</td> <td>38.57</td> <td>15.95</td> <td>65.67</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11100.00	46.46	74.00	-27.54	57.61	38.57	15.95	65.67	0.00	300	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11100.00</td> <td>46.52</td> <td>74.00</td> <td>-27.48</td> <td>57.67</td> <td>38.57</td> <td>15.95</td> <td>65.67</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11100.00	46.52	74.00	-27.48	57.67	38.57	15.95	65.67	0.00	100	0
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1 11100.00	46.46	74.00	-27.54	57.61	38.57	15.95	65.67	0.00	300	0	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1 11100.00	46.52	74.00	-27.48	57.67	38.57	15.95	65.67	0.00	100	0	PEAK																																																																						







	25																																																																																												
Mode	Band Edge - L																																																																																												
	U-NII-2C_5.47-5.725_802.11ac_VHT40_CH134_5670MHz																																																																																												
ANT	4																																																																																												
Pol.	Horizontal	Fundamental																																																																																											
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5353.84</td> <td>53.13</td> <td>74.00</td> <td>-20.87</td> <td>40.59</td> <td>34.78</td> <td>10.83</td> <td>33.07</td> <td>0.00</td> <td>100</td> <td>239</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5465.84</td> <td>51.04</td> <td>68.30</td> <td>-17.26</td> <td>38.21</td> <td>34.87</td> <td>10.99</td> <td>33.03</td> <td>0.00</td> <td>100</td> <td>239</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5353.84	53.13	74.00	-20.87	40.59	34.78	10.83	33.07	0.00	100	239	PEAK	2	5465.84	51.04	68.30	-17.26	38.21	34.87	10.99	33.03	0.00	100	239	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>104.01</td> <td>-----</td> <td>-----</td> <td>90.62</td> <td>35.10</td> <td>11.26</td> <td>32.97</td> <td>0.00</td> <td>100</td> <td>239</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5670.00	104.01	-----	-----	90.62	35.10	11.26	32.97	0.00	100	239	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5353.84	53.13	74.00	-20.87	40.59	34.78	10.83	33.07	0.00	100	239	PEAK																																																																																	
2	5465.84	51.04	68.30	-17.26	38.21	34.87	10.99	33.03	0.00	100	239	PEAK																																																																																	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5670.00	104.01	-----	-----	90.62	35.10	11.26	32.97	0.00	100	239	PEAK																																																																																	
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.16</td> <td>41.76</td> <td>54.00</td> <td>-12.24</td> <td>28.95</td> <td>34.87</td> <td>10.98</td> <td>33.04</td> <td>0.00</td> <td>100</td> <td>239</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5458.16	41.76	54.00	-12.24	28.95	34.87	10.98	33.04	0.00	100	239	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>95.34</td> <td>-----</td> <td>-----</td> <td>81.95</td> <td>35.10</td> <td>11.26</td> <td>32.97</td> <td>0.00</td> <td>100</td> <td>239</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5670.00	95.34	-----	-----	81.95	35.10	11.26	32.97	0.00	100	239	AVERAGE													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5458.16	41.76	54.00	-12.24	28.95	34.87	10.98	33.04	0.00	100	239	AVERAGE																																																																																	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5670.00	95.34	-----	-----	81.95	35.10	11.26	32.97	0.00	100	239	AVERAGE																																																																																	



Mode	25																																							
	Band Edge - R																																							
	U-NII-2C_5.47-5.725_802.11ac_VHT40_CH134_5670MHz																																							
ANT	4																																							
Pol.	Horizontal	Fundamental																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5725.01</td> <td>62.42</td> <td>68.30</td> <td>-5.88</td> <td>48.90</td> <td>35.16</td> <td>11.31</td> <td>32.95</td> <td>0.00</td> <td>100 239 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5725.01	62.42	68.30	-5.88	48.90	35.16	11.31	32.95	0.00	100 239 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																															
1 5725.01	62.42	68.30	-5.88	48.90	35.16	11.31	32.95	0.00	100 239 PEAK																															

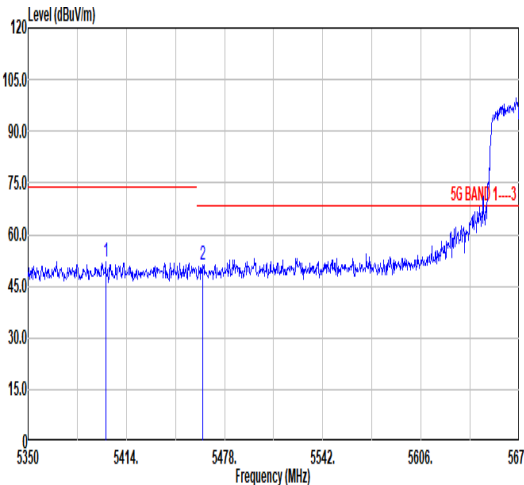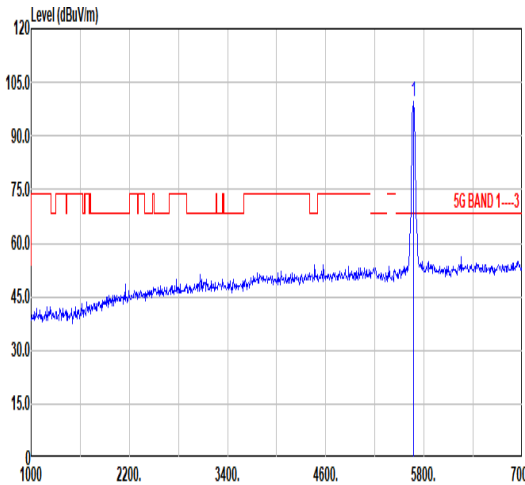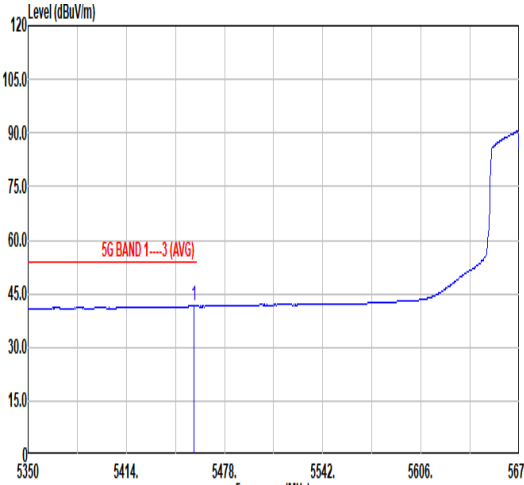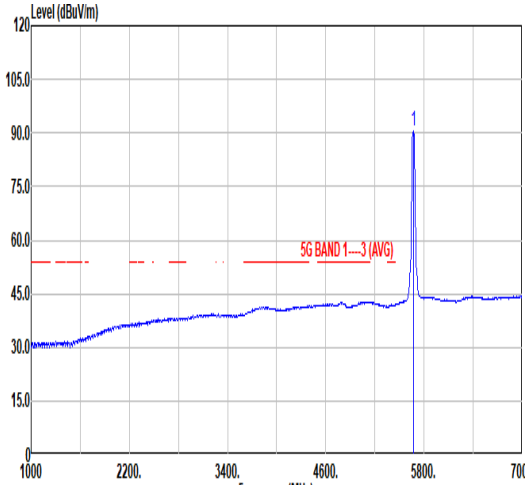

	25																																																																																																
Mode	Band Edge - L																																																																																																
	U-NII-2C_5.47-5.725_802.11ac_VHT40_CH134_5670MHz																																																																																																
ANT	4																																																																																																
Pol.	Vertical	Fundamental																																																																																															
Peak	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5400.56</td> <td>52.17</td> <td>74.00</td> <td>-21.83</td> <td>39.52</td> <td>34.82</td> <td>10.89</td> <td>33.06</td> <td>0.00</td> <td>100</td> <td>16</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5463.92</td> <td>51.33</td> <td>68.30</td> <td>-16.97</td> <td>38.50</td> <td>34.87</td> <td>10.99</td> <td>33.03</td> <td>0.00</td> <td>100</td> <td>16</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5400.56	52.17	74.00	-21.83	39.52	34.82	10.89	33.06	0.00	100	16	PEAK	2	5463.92	51.33	68.30	-16.97	38.50	34.87	10.99	33.03	0.00	100	16	PEAK	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>99.71</td> <td>-----</td> <td>-----</td> <td>86.34</td> <td>35.09</td> <td>11.25</td> <td>32.97</td> <td>0.00</td> <td>100</td> <td>16</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5670.00	99.71	-----	-----	86.34	35.09	11.25	32.97	0.00	100	16	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5400.56	52.17	74.00	-21.83	39.52	34.82	10.89	33.06	0.00	100	16	PEAK																																																																																					
2	5463.92	51.33	68.30	-16.97	38.50	34.87	10.99	33.03	0.00	100	16	PEAK																																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5670.00	99.71	-----	-----	86.34	35.09	11.25	32.97	0.00	100	16	PEAK																																																																																					
Avg	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.16</td> <td>41.51</td> <td>54.00</td> <td>-12.49</td> <td>28.70</td> <td>34.87</td> <td>10.98</td> <td>33.04</td> <td>0.00</td> <td>100</td> <td>16</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5458.16	41.51	54.00	-12.49	28.70	34.87	10.98	33.04	0.00	100	16	AVERAGE	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>90.71</td> <td>-----</td> <td>-----</td> <td>77.32</td> <td>35.10</td> <td>11.26</td> <td>32.97</td> <td>0.00</td> <td>100</td> <td>16</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5670.00	90.71	-----	-----	77.32	35.10	11.26	32.97	0.00	100	16	AVERAGE													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5458.16	41.51	54.00	-12.49	28.70	34.87	10.98	33.04	0.00	100	16	AVERAGE																																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5670.00	90.71	-----	-----	77.32	35.10	11.26	32.97	0.00	100	16	AVERAGE																																																																																					



Mode	25																																							
	Band Edge - R																																							
	U-NII-2C_5.47-5.725_802.11ac_VHT40_CH134_5670MHz																																							
ANT	4																																							
Pol.	Vertical	Fundamental																																						
Peak	<p>The plot shows a signal level starting at approximately 100 dBuV/m at 5670 MHz, dropping to a noise floor of about 50 dBuV/m by 5700 MHz. A red horizontal line indicates a limit of 68.30 dBuV/m. A sharp peak is observed at 5725.20 MHz, reaching a level of 58.93 dBuV/m. The x-axis ranges from 5670 to 5765 MHz, and the y-axis ranges from 0 to 120 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5725.20</td> <td>58.93</td> <td>68.30</td> <td>-9.37</td> <td>45.41</td> <td>35.16</td> <td>11.31</td> <td>32.95</td> <td>0.00</td> <td>100 16 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5725.20	58.93	68.30	-9.37	45.41	35.16	11.31	32.95	0.00	100 16 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																															
1 5725.20	58.93	68.30	-9.37	45.41	35.16	11.31	32.95	0.00	100 16 PEAK																															



	25																																																																																
Mode	Harmonic																																																																																
	U-NII-2C_5.47-5.725_802.11ac_VHT40_CH134_5670MHz																																																																																
ANT	4																																																																																
Pol.	Horizontal	Vertical																																																																															
Peak Avg																																																																																	
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11340.00</td> <td>45.69</td> <td>74.00</td> <td>-28.31</td> <td>56.42</td> <td>38.74</td> <td>16.07</td> <td>65.54</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11340.00	45.69	74.00	-28.31	56.42	38.74	16.07	65.54	0.00	300	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11340.00</td> <td>45.83</td> <td>74.00</td> <td>-28.17</td> <td>56.56</td> <td>38.74</td> <td>16.07</td> <td>65.54</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11340.00	45.83	74.00	-28.17	56.56	38.74	16.07	65.54	0.00	100	0
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1 11340.00	45.69	74.00	-28.31	56.42	38.74	16.07	65.54	0.00	300	0	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1 11340.00	45.83	74.00	-28.17	56.56	38.74	16.07	65.54	0.00	100	0	PEAK																																																																						







	26																																																																																			
Mode	Band Edge - L																																																																																			
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																																																																			
ANT	4																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.26</td> <td>61.98</td> <td>74.00</td> <td>-12.02</td> <td>49.88</td> <td>34.62</td> <td>10.62</td> <td>33.14</td> <td>0.00</td> <td>104</td> <td>241</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5148.26	61.98	74.00	-12.02	49.88	34.62	10.62	33.14	0.00	104	241	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>98.89</td> <td>-----</td> <td>-----</td> <td>86.70</td> <td>34.66</td> <td>10.65</td> <td>33.12</td> <td>0.00</td> <td>104</td> <td>241</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	98.89	-----	-----	86.70	34.66	10.65	33.12	0.00	104	241	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5148.26	61.98	74.00	-12.02	49.88	34.62	10.62	33.14	0.00	104	241	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5210.00	98.89	-----	-----	86.70	34.66	10.65	33.12	0.00	104	241	PEAK																																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.73</td> <td>49.94</td> <td>54.00</td> <td>-4.06</td> <td>37.84</td> <td>34.62</td> <td>10.62</td> <td>33.14</td> <td>0.00</td> <td>104</td> <td>241</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.73	49.94	54.00	-4.06	37.84	34.62	10.62	33.14	0.00	104	241	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>90.12</td> <td>-----</td> <td>-----</td> <td>77.91</td> <td>34.67</td> <td>10.66</td> <td>33.12</td> <td>0.00</td> <td>104</td> <td>241</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	90.12	-----	-----	77.91	34.67	10.66	33.12	0.00	104	241	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5149.73	49.94	54.00	-4.06	37.84	34.62	10.62	33.14	0.00	104	241	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5210.00	90.12	-----	-----	77.91	34.67	10.66	33.12	0.00	104	241	AVERAGE																																																																								



	26																																						
Mode	Band Edge - R																																						
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																						
ANT	4																																						
Pol.	Horizontal	Fundamental																																					
Peak																																							
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5438.75</td> <td>53.39</td> <td>74.00</td> <td>-20.61</td> <td>40.63</td> <td>34.85</td> <td>10.95</td> <td>33.04</td> <td>0.00</td> <td>104 241 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5438.75	53.39	74.00	-20.61	40.63	34.85	10.95	33.04	0.00
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																														
1 5438.75	53.39	74.00	-20.61	40.63	34.85	10.95	33.04	0.00	104 241 PEAK																														
Avg																																							
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5352.25</td> <td>42.21</td> <td>54.00</td> <td>-11.79</td> <td>29.67</td> <td>34.78</td> <td>10.83</td> <td>33.07</td> <td>0.00</td> <td>104 241 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5352.25	42.21	54.00	-11.79	29.67	34.78	10.83	33.07	0.00
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																														
1 5352.25	42.21	54.00	-11.79	29.67	34.78	10.83	33.07	0.00	104 241 AVERAGE																														

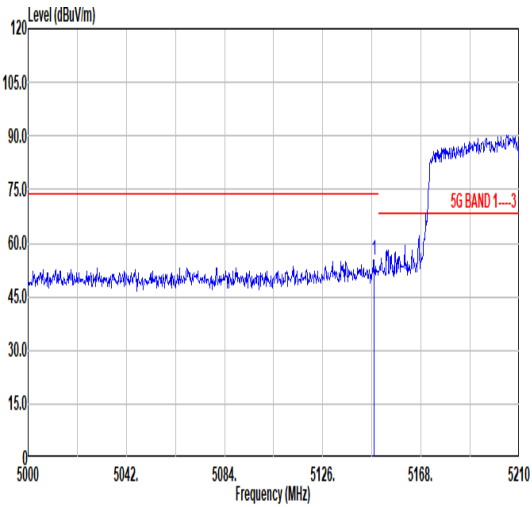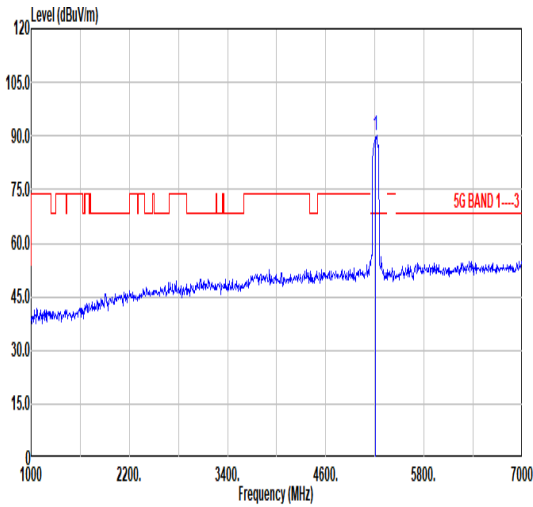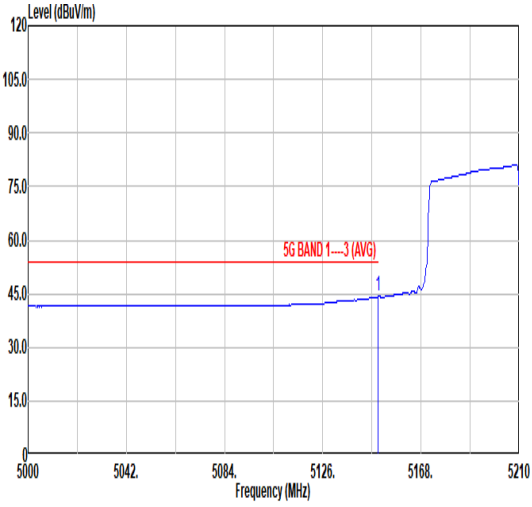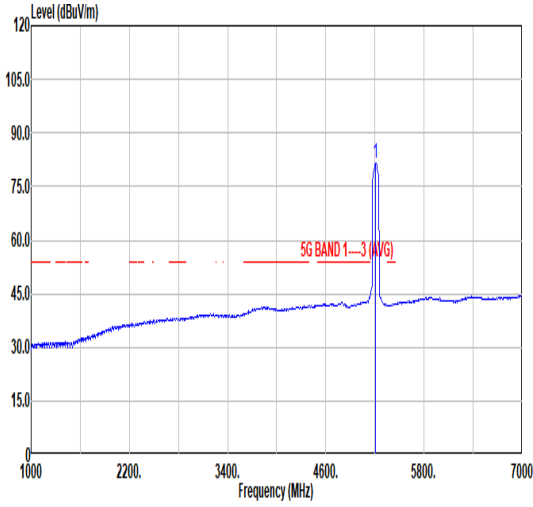

	26																																																																																			
Mode	Band Edge - L																																																																																			
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																																																																			
ANT	4																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	 <table border="1" data-bbox="279 1108 813 1243"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5147.84</td> <td>55.34</td> <td>74.00</td> <td>-18.66</td> <td>43.24</td> <td>34.62</td> <td>10.62</td> <td>33.14</td> <td>0.00</td> <td>107</td> <td>16</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5147.84	55.34	74.00	-18.66	43.24	34.62	10.62	33.14	0.00	107	16	PEAK	 <table border="1" data-bbox="885 1108 1420 1243"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>90.29</td> <td>-----</td> <td>-----</td> <td>78.05</td> <td>34.68</td> <td>10.67</td> <td>33.11</td> <td>0.00</td> <td>107</td> <td>16</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	90.29	-----	-----	78.05	34.68	10.67	33.11	0.00	107	16	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5147.84	55.34	74.00	-18.66	43.24	34.62	10.62	33.14	0.00	107	16	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5210.00	90.29	-----	-----	78.05	34.68	10.67	33.11	0.00	107	16	PEAK																																																																								
Avg	 <table border="1" data-bbox="279 1792 813 1926"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.73</td> <td>44.22</td> <td>54.00</td> <td>-9.78</td> <td>32.12</td> <td>34.62</td> <td>10.62</td> <td>33.14</td> <td>0.00</td> <td>107</td> <td>16</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.73	44.22	54.00	-9.78	32.12	34.62	10.62	33.14	0.00	107	16	AVERAGE	 <table border="1" data-bbox="885 1792 1420 1926"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>81.58</td> <td>-----</td> <td>-----</td> <td>69.37</td> <td>34.67</td> <td>10.66</td> <td>33.12</td> <td>0.00</td> <td>107</td> <td>16</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	81.58	-----	-----	69.37	34.67	10.66	33.12	0.00	107	16	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5149.73	44.22	54.00	-9.78	32.12	34.62	10.62	33.14	0.00	107	16	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5210.00	81.58	-----	-----	69.37	34.67	10.66	33.12	0.00	107	16	AVERAGE																																																																								



	26																																										
Mode	Band Edge - R																																										
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																										
ANT	4																																										
Pol.	Vertical	Fundamental																																									
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5356.50</td> <td>52.38</td> <td>74.00</td> <td>-21.62</td> <td>39.82</td> <td>34.79</td> <td>10.84</td> <td>33.07</td> <td>0.00</td> <td>107</td> <td>16</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5356.50	52.38	74.00	-21.62	39.82	34.79	10.84	33.07	0.00	107	16	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																		
1	5356.50	52.38	74.00	-21.62	39.82	34.79	10.84	33.07	0.00	107	16	PEAK																															
Blank																																											
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.00</td> <td>41.62</td> <td>54.00</td> <td>-12.38</td> <td>28.81</td> <td>34.87</td> <td>10.98</td> <td>33.04</td> <td>0.00</td> <td>107</td> <td>16</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5458.00	41.62	54.00	-12.38	28.81	34.87	10.98	33.04	0.00	107	16	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																		
1	5458.00	41.62	54.00	-12.38	28.81	34.87	10.98	33.04	0.00	107	16	AVERAGE																															
Blank																																											



	26																																																																												
Mode	Harmonic																																																																												
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																																																												
ANT	4																																																																												
Pol.	Horizontal	Vertical																																																																											
Peak Avg																																																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10420.00</td> <td>45.71</td> <td>68.30</td> <td>-22.59</td> <td>58.44</td> <td>38.09</td> <td>15.59</td> <td>66.41</td> <td>0.00</td> <td>300 0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10420.00	45.71	68.30	-22.59	58.44	38.09	15.59	66.41	0.00	300 0 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10420.00</td> <td>45.49</td> <td>68.30</td> <td>-22.81</td> <td>58.22</td> <td>38.09</td> <td>15.59</td> <td>66.41</td> <td>0.00</td> <td>100 0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10420.00	45.49	68.30	-22.81	58.22	38.09	15.59	66.41	0.00
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																				
1 10420.00	45.71	68.30	-22.59	58.44	38.09	15.59	66.41	0.00	300 0 PEAK																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																				
1 10420.00	45.49	68.30	-22.81	58.22	38.09	15.59	66.41	0.00	100 0 PEAK																																																																				







	27																																																																																			
Mode	Band Edge - L																																																																																			
	U-NII-2A_5.25-5.35_802.11ac_VHT80_CH58_5290MHz																																																																																			
ANT	4																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5011.02</td> <td>54.34</td> <td>74.00</td> <td>-19.66</td> <td>42.46</td> <td>34.51</td> <td>10.56</td> <td>33.19</td> <td>0.00</td> <td>100</td> <td>247</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5011.02	54.34	74.00	-19.66	42.46	34.51	10.56	33.19	0.00	100	247	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>96.13</td> <td>-----</td> <td>-----</td> <td>85.74</td> <td>34.73</td> <td>10.75</td> <td>33.09</td> <td>0.00</td> <td>100</td> <td>247</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5290.00	96.13	-----	-----	85.74	34.73	10.75	33.09	0.00	100	247	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5011.02	54.34	74.00	-19.66	42.46	34.51	10.56	33.19	0.00	100	247	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5290.00	96.13	-----	-----	85.74	34.73	10.75	33.09	0.00	100	247	PEAK																																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5144.13</td> <td>42.47</td> <td>54.00</td> <td>-11.53</td> <td>30.37</td> <td>34.62</td> <td>10.62</td> <td>33.14</td> <td>0.00</td> <td>100</td> <td>247</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5144.13	42.47	54.00	-11.53	30.37	34.62	10.62	33.14	0.00	100	247	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>90.29</td> <td>-----</td> <td>-----</td> <td>77.89</td> <td>34.73</td> <td>10.76</td> <td>33.09</td> <td>0.00</td> <td>100</td> <td>247</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5290.00	90.29	-----	-----	77.89	34.73	10.76	33.09	0.00	100	247	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5144.13	42.47	54.00	-11.53	30.37	34.62	10.62	33.14	0.00	100	247	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5290.00	90.29	-----	-----	77.89	34.73	10.76	33.09	0.00	100	247	AVERAGE																																																																								



	27																																										
Mode	Band Edge - R																																										
	U-NII-2A_5.25-5.35_802.11ac_VHT80_CH58_5290MHz																																										
ANT	4																																										
Pol.	Horizontal	Fundamental																																									
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5357.32</td> <td>60.65</td> <td>74.00</td> <td>-13.35</td> <td>48.09</td> <td>34.79</td> <td>10.84</td> <td>33.07</td> <td>0.00</td> <td>100</td> <td>247</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5357.32	60.65	74.00	-13.35	48.09	34.79	10.84	33.07	0.00	100	247	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																		
1	5357.32	60.65	74.00	-13.35	48.09	34.79	10.84	33.07	0.00	100	247	PEAK																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.18</td> <td>47.27</td> <td>54.00</td> <td>-6.73</td> <td>34.73</td> <td>34.78</td> <td>10.83</td> <td>33.07</td> <td>0.00</td> <td>100</td> <td>247</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5350.18	47.27	54.00	-6.73	34.73	34.78	10.83	33.07	0.00	100	247	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																		
1	5350.18	47.27	54.00	-6.73	34.73	34.78	10.83	33.07	0.00	100	247	AVERAGE																															

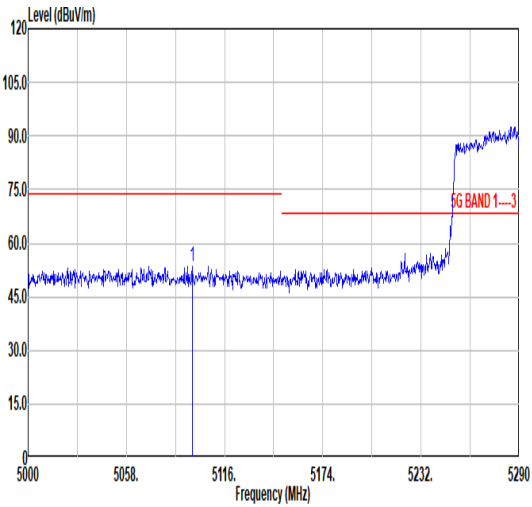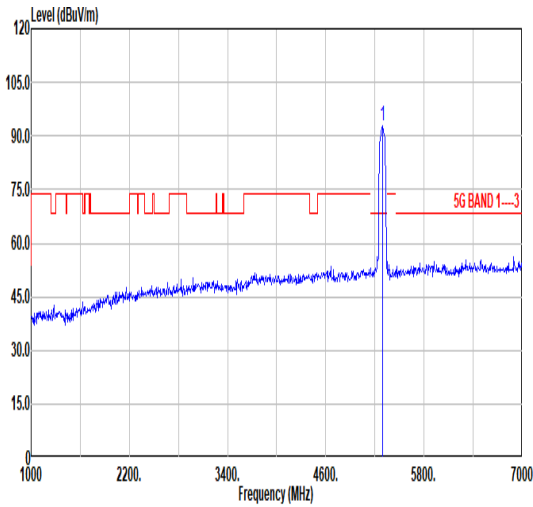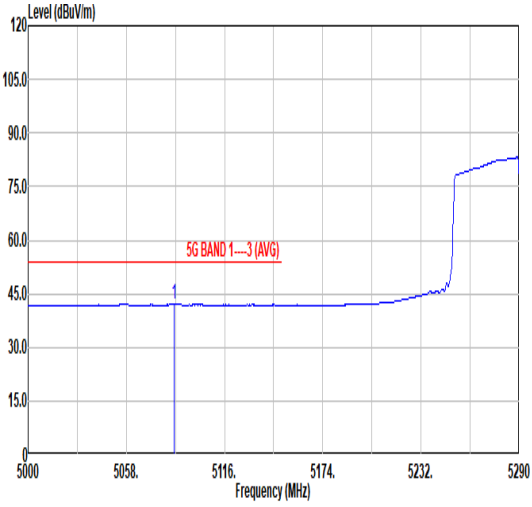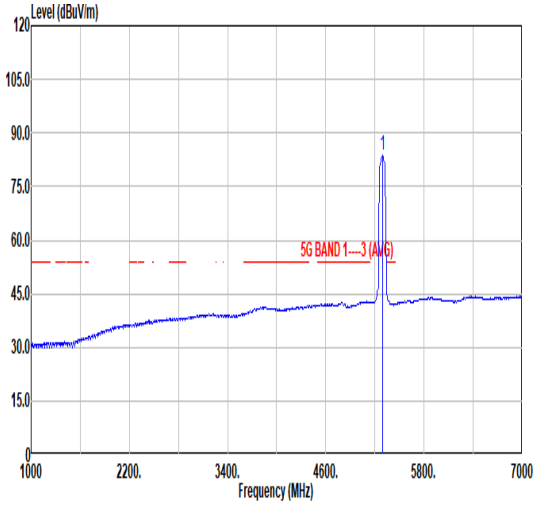

		27																																																																																		
Mode	Band Edge - L																																																																																			
	U-NII-2A_5.25-5.35_802.11ac_VHT80_CH58_5290MHz																																																																																			
ANT	4																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	 <table border="1" data-bbox="279 1108 813 1243"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5097.15</td> <td>53.39</td> <td>74.00</td> <td>-20.61</td> <td>41.37</td> <td>34.58</td> <td>10.60</td> <td>33.16</td> <td>0.00</td> <td>100</td> <td>16</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5097.15	53.39	74.00	-20.61	41.37	34.58	10.60	33.16	0.00	100	16	PEAK	 <table border="1" data-bbox="885 1108 1420 1243"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>92.78</td> <td>-----</td> <td>-----</td> <td>80.38</td> <td>34.73</td> <td>10.76</td> <td>33.09</td> <td>0.00</td> <td>100</td> <td>16</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5290.00	92.78	-----	-----	80.38	34.73	10.76	33.09	0.00	100	16	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5097.15	53.39	74.00	-20.61	41.37	34.58	10.60	33.16	0.00	100	16	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5290.00	92.78	-----	-----	80.38	34.73	10.76	33.09	0.00	100	16	PEAK																																																																								
Avg	 <table border="1" data-bbox="279 1792 813 1926"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5086.42</td> <td>41.98</td> <td>54.00</td> <td>-12.02</td> <td>29.98</td> <td>34.57</td> <td>10.59</td> <td>33.16</td> <td>0.00</td> <td>100</td> <td>16</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5086.42	41.98	54.00	-12.02	29.98	34.57	10.59	33.16	0.00	100	16	AVERAGE	 <table border="1" data-bbox="885 1792 1420 1926"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>83.73</td> <td>-----</td> <td>-----</td> <td>71.32</td> <td>34.74</td> <td>10.76</td> <td>33.09</td> <td>0.00</td> <td>100</td> <td>16</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5290.00	83.73	-----	-----	71.32	34.74	10.76	33.09	0.00	100	16	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5086.42	41.98	54.00	-12.02	29.98	34.57	10.59	33.16	0.00	100	16	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5290.00	83.73	-----	-----	71.32	34.74	10.76	33.09	0.00	100	16	AVERAGE																																																																								



	27																																									
Mode	Band Edge - R																																									
	U-NII-2A_5.25-5.35_802.11ac_VHT80_CH58_5290MHz																																									
ANT	4																																									
Pol.	Vertical	Fundamental																																								
Peak																																										
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5351.20</td> <td>55.35</td> <td>74.00</td> <td>-18.65</td> <td>42.81</td> <td>34.78</td> <td>10.83</td> <td>33.07</td> <td>0.00</td> <td>100</td> <td>16</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5351.20	55.35	74.00	-18.65	42.81	34.78	10.83	33.07	0.00	100	16
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1	5351.20	55.35	74.00	-18.65	42.81	34.78	10.83	33.07	0.00	100	16	PEAK																														
Avg																																										
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.18</td> <td>43.63</td> <td>54.00</td> <td>-10.37</td> <td>31.09</td> <td>34.78</td> <td>10.83</td> <td>33.07</td> <td>0.00</td> <td>100</td> <td>16</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5350.18	43.63	54.00	-10.37	31.09	34.78	10.83	33.07	0.00	100	16
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1	5350.18	43.63	54.00	-10.37	31.09	34.78	10.83	33.07	0.00	100	16	AVERAGE																														



	27																																																																																
Mode	Harmonic																																																																																
	U-NII-2A_5.25-5.35_802.11ac_VHT80_CH58_5290MHz																																																																																
ANT	4																																																																																
Pol.	Horizontal	Vertical																																																																															
Peak Avg																																																																																	
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10580.00</td> <td>45.15</td> <td>68.30</td> <td>-23.15</td> <td>57.49</td> <td>38.21</td> <td>15.67</td> <td>66.22</td> <td>0.00</td> <td>300 0 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor		cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10580.00	45.15	68.30	-23.15	57.49	38.21	15.67	66.22	0.00	300 0 PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10580.00</td> <td>45.23</td> <td>68.30</td> <td>-23.07</td> <td>57.57</td> <td>38.21</td> <td>15.67</td> <td>66.22</td> <td>0.00</td> <td>100 0 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor		cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10580.00	45.23	68.30	-23.07	57.57	38.21	15.67	66.22	0.00
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor		cm	deg																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1 10580.00	45.15	68.30	-23.15	57.49	38.21	15.67	66.22	0.00	300 0 PEAK																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor		cm	deg																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1 10580.00	45.23	68.30	-23.07	57.57	38.21	15.67	66.22	0.00	100 0 PEAK																																																																								







	28																																																																																																																																	
Mode	Band Edge - L																																																																																																																																	
	U-NII-2C_5.47-5.725_802.11ac_VHT80_CH106_5530MHz																																																																																																																																	
ANT	4																																																																																																																																	
Pol.	Horizontal	Fundamental																																																																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.64</td> <td>61.53</td> <td>74.00</td> <td>-12.47</td> <td>48.72</td> <td>34.87</td> <td>10.98</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>33.04</td> <td>0.00</td> </tr> <tr> <td>2</td> <td>5468.80</td> <td>63.30</td> <td>68.30</td> <td>-5.00</td> <td>50.46</td> <td>34.88</td> <td>10.99</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>33.03</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>115</td> <td>265</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Remark	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5457.64	61.53	74.00	-12.47	48.72	34.87	10.98							33.04	0.00	2	5468.80	63.30	68.30	-5.00	50.46	34.88	10.99							33.03	0.00							115	265								PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>99.11</td> <td>-----</td> <td>-----</td> <td>86.09</td> <td>34.94</td> <td>11.09</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>33.01</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>115</td> <td>265</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Remark	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5530.00	99.11	-----	-----	86.09	34.94	11.09							33.01	0.00							115	265								PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Remark																																																																																																																											
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																																											
1	5457.64	61.53	74.00	-12.47	48.72	34.87	10.98																																																																																																																											
						33.04	0.00																																																																																																																											
2	5468.80	63.30	68.30	-5.00	50.46	34.88	10.99																																																																																																																											
						33.03	0.00																																																																																																																											
						115	265																																																																																																																											
							PEAK																																																																																																																											
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Remark																																																																																																																											
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																																											
1	5530.00	99.11	-----	-----	86.09	34.94	11.09																																																																																																																											
						33.01	0.00																																																																																																																											
						115	265																																																																																																																											
							PEAK																																																																																																																											
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.54</td> <td>46.58</td> <td>54.00</td> <td>-7.42</td> <td>33.77</td> <td>34.87</td> <td>10.98</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>33.04</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>115</td> <td>265</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Remark	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5458.54	46.58	54.00	-7.42	33.77	34.87	10.98							33.04	0.00							115	265								AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>90.14</td> <td>-----</td> <td>-----</td> <td>77.12</td> <td>34.94</td> <td>11.09</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>33.01</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>115</td> <td>265</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Remark	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5530.00	90.14	-----	-----	77.12	34.94	11.09							33.01	0.00							115	265								AVERAGE																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Remark																																																																																																																											
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																																											
1	5458.54	46.58	54.00	-7.42	33.77	34.87	10.98																																																																																																																											
						33.04	0.00																																																																																																																											
						115	265																																																																																																																											
							AVERAGE																																																																																																																											
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Remark																																																																																																																											
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																																											
1	5530.00	90.14	-----	-----	77.12	34.94	11.09																																																																																																																											
						33.01	0.00																																																																																																																											
						115	265																																																																																																																											
							AVERAGE																																																																																																																											



Mode	28																																														
	Band Edge - R																																														
	U-NII-2C_5.47-5.725_802.11ac_VHT80_CH106_5530MHz																																														
ANT	4																																														
Pol.	Horizontal	Fundamental																																													
Peak	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5757.25</td> <td>53.54</td> <td>68.30</td> <td>-14.76</td> <td>39.94</td> <td>35.20</td> <td>11.34</td> <td>32.94</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>115 265 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5757.25	53.54	68.30	-14.76	39.94	35.20	11.34	32.94	0.00									115 265 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																							
1 5757.25	53.54	68.30	-14.76	39.94	35.20	11.34	32.94	0.00																																							
								115 265 PEAK																																							

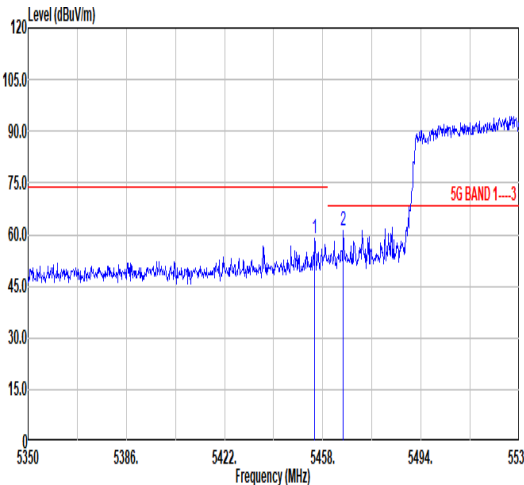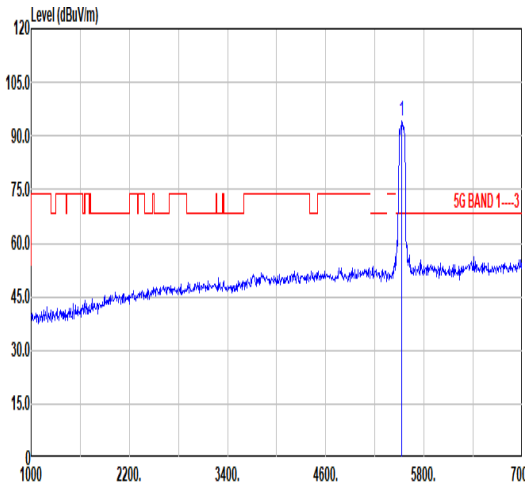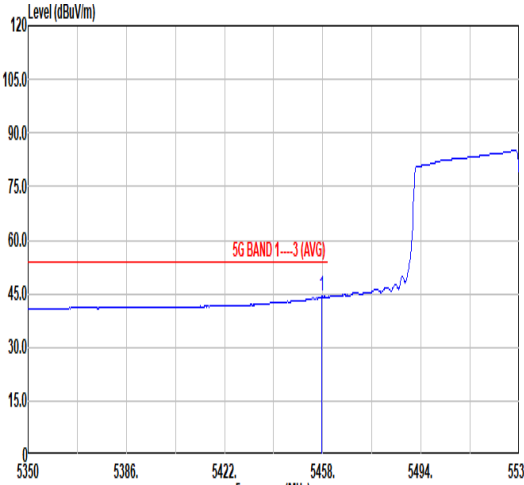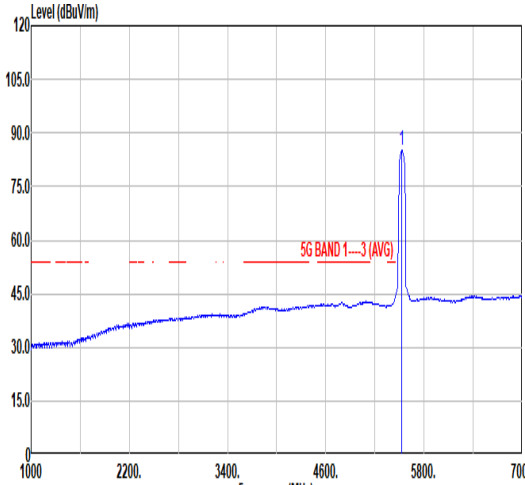

		28																																																																																																			
Mode		Band Edge - L																																																																																																			
		U-NII-2C_5.47-5.725_802.11ac_VHT80_CH106_5530MHz																																																																																																			
ANT		4																																																																																																			
Pol.	Vertical	Fundamental																																																																																																			
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows a signal level around 45 dBuV/m until 5494 MHz, where it rises to approximately 90 dBuV/m. A red line indicates the 5G BAND 1-3 limit at 75 dBuV/m. Two peaks are marked with '1' and '2' at approximately 5458 MHz and 5465 MHz respectively.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5455.12</td> <td>58.65</td> <td>74.00</td> <td>-15.35</td> <td>45.86</td> <td>34.86</td> <td>10.97</td> <td>33.04</td> <td>0.00</td> <td>105</td> <td>17</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5465.56</td> <td>61.04</td> <td>68.30</td> <td>-7.26</td> <td>48.21</td> <td>34.87</td> <td>10.99</td> <td>33.03</td> <td>0.00</td> <td>105</td> <td>17</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5455.12	58.65	74.00	-15.35	45.86	34.86	10.97	33.04	0.00	105	17	PEAK	2	5465.56	61.04	68.30	-7.26	48.21	34.87	10.99	33.03	0.00	105	17	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. The plot shows a signal level around 45 dBuV/m until 5494 MHz, where it rises to approximately 90 dBuV/m. A red line indicates the 5G BAND 1-3 limit at 75 dBuV/m. A single peak is marked with '1' at approximately 5458 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>94.00</td> <td>-----</td> <td>-----</td> <td>80.98</td> <td>34.94</td> <td>11.09</td> <td>33.01</td> <td>0.00</td> <td>105</td> <td>17</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5530.00	94.00	-----	-----	80.98	34.94	11.09	33.01	0.00	105	17	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	Remark																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5455.12	58.65	74.00	-15.35	45.86	34.86	10.97	33.04	0.00	105	17	PEAK																																																																																									
2	5465.56	61.04	68.30	-7.26	48.21	34.87	10.99	33.03	0.00	105	17	PEAK																																																																																									
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	Remark																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5530.00	94.00	-----	-----	80.98	34.94	11.09	33.01	0.00	105	17	PEAK																																																																																									
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows a signal level around 45 dBuV/m until 5494 MHz, where it rises to approximately 85 dBuV/m. A red line indicates the 5G BAND 1-3 (AVG) limit at 55 dBuV/m. A peak is marked with '1' at approximately 5458 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.64</td> <td>44.18</td> <td>54.00</td> <td>-9.82</td> <td>31.37</td> <td>34.87</td> <td>10.98</td> <td>33.04</td> <td>0.00</td> <td>105</td> <td>17</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5457.64	44.18	54.00	-9.82	31.37	34.87	10.98	33.04	0.00	105	17	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. The plot shows a signal level around 45 dBuV/m until 5494 MHz, where it rises to approximately 85 dBuV/m. A red line indicates the 5G BAND 1-3 (AVG) limit at 55 dBuV/m. A peak is marked with '1' at approximately 5458 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>85.24</td> <td>-----</td> <td>-----</td> <td>72.22</td> <td>34.94</td> <td>11.09</td> <td>33.01</td> <td>0.00</td> <td>105</td> <td>17</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5530.00	85.24	-----	-----	72.22	34.94	11.09	33.01	0.00	105	17	AVERAGE													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	Remark																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5457.64	44.18	54.00	-9.82	31.37	34.87	10.98	33.04	0.00	105	17	AVERAGE																																																																																									
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	Remark																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5530.00	85.24	-----	-----	72.22	34.94	11.09	33.01	0.00	105	17	AVERAGE																																																																																									



Mode	28																																														
	Band Edge - R																																														
	U-NII-2C_5.47-5.725_802.11ac_VHT80_CH106_5530MHz																																														
ANT	4																																														
Pol.	Vertical	Fundamental																																													
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5764.77</td> <td>54.46</td> <td>68.30</td> <td>-13.84</td> <td>40.84</td> <td>35.21</td> <td>11.35</td> <td>32.94</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>105 17 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5764.77	54.46	68.30	-13.84	40.84	35.21	11.35	32.94	0.00									105 17 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																							
1 5764.77	54.46	68.30	-13.84	40.84	35.21	11.35	32.94	0.00																																							
								105 17 PEAK																																							



	28																																																																																
Mode	Harmonic																																																																																
	U-NII-2C_5.47-5.725_802.11ac_VHT80_CH106_5530MHz																																																																																
ANT	4																																																																																
Pol.	Horizontal	Vertical																																																																															
Peak Avg																																																																																	
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11060.00</td> <td>46.25</td> <td>74.00</td> <td>-27.75</td> <td>57.48</td> <td>38.54</td> <td>15.93</td> <td>65.70</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11060.00	46.25	74.00	-27.75	57.48	38.54	15.93	65.70	0.00	300	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11060.00</td> <td>45.19</td> <td>74.00</td> <td>-28.81</td> <td>56.42</td> <td>38.54</td> <td>15.93</td> <td>65.70</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11060.00	45.19	74.00	-28.81	56.42	38.54	15.93	65.70	0.00	100	0
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1 11060.00	46.25	74.00	-27.75	57.48	38.54	15.93	65.70	0.00	300	0	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1 11060.00	45.19	74.00	-28.81	56.42	38.54	15.93	65.70	0.00	100	0	PEAK																																																																						



	38																																																																																	
Mode	Harmonic																																																																																	
	U-NII-2C-3_5.47-5.85_802.11a_CH144_5720MHz																																																																																	
ANT	4																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11440.00</td> <td>46.56</td> <td>74.00</td> <td>-27.44</td> <td>57.11</td> <td>38.81</td> <td>16.12</td> <td>65.48</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11440.00	46.56	74.00	-27.44	57.11	38.81	16.12	65.48	0.00	300	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11440.00</td> <td>47.39</td> <td>74.00</td> <td>-26.61</td> <td>57.94</td> <td>38.81</td> <td>16.12</td> <td>65.48</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11440.00	47.39	74.00	-26.61	57.94	38.81	16.12	65.48	0.00	100	0	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	11440.00	46.56	74.00	-27.44	57.11	38.81	16.12	65.48	0.00	300	0	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	11440.00	47.39	74.00	-26.61	57.94	38.81	16.12	65.48	0.00	100	0	PEAK																																																																						





	39																																																																													
Mode	Harmonic																																																																													
	U-NII-2C-3_5.47-5.85_802.11ac_VHT20_CH144_5720MHz																																																																													
ANT	4																																																																													
Pol.	Horizontal	Vertical																																																																												
Peak	<p>Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a blue signal line fluctuating around 48.8 dBuV/m, with a red stepped limit line labeled '5G BAND 1-3' and '5G BAND 1-3 (AVG)'. A vertical blue line is drawn at 11440.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11440.00</td> <td>46.27</td> <td>74.00</td> <td>-27.73</td> <td>56.82</td> <td>38.81</td> <td>16.12</td> <td>65.48</td> <td>0.00</td> <td>300 0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11440.00	46.27	74.00	-27.73	56.82	38.81	16.12	65.48	0.00	300 0 PEAK	<p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows a blue signal line fluctuating around 48.8 dBuV/m, with a red stepped limit line labeled '5G BAND 1-3' and '5G BAND 1-3 (AVG)'. A vertical blue line is drawn at 11440.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11440.00</td> <td>46.36</td> <td>74.00</td> <td>-27.64</td> <td>56.91</td> <td>38.81</td> <td>16.12</td> <td>65.48</td> <td>0.00</td> <td>100 0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11440.00	46.36	74.00	-27.64	56.91	38.81	16.12	65.48	0.00	100 0 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 11440.00	46.27	74.00	-27.73	56.82	38.81	16.12	65.48	0.00	300 0 PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 11440.00	46.36	74.00	-27.64	56.91	38.81	16.12	65.48	0.00	100 0 PEAK																																																																					
Avg																																																																														



Mode	40																																																																																
	Harmonic																																																																																
	U-NII-2C-3_5.47-5.85_802.11ac_VHT40_CH142_5710MHz																																																																																
ANT	4																																																																																
Pol.	Horizontal	Vertical																																																																															
Peak Avg																																																																																	
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11420.00</td> <td>46.70</td> <td>74.00</td> <td>-27.30</td> <td>57.29</td> <td>38.79</td> <td>16.11</td> <td>65.49</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11420.00	46.70	74.00	-27.30	57.29	38.79	16.11	65.49	0.00	300	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11420.00</td> <td>45.62</td> <td>74.00</td> <td>-28.38</td> <td>56.21</td> <td>38.79</td> <td>16.11</td> <td>65.49</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11420.00	45.62	74.00	-28.38	56.21	38.79	16.11	65.49	0.00	100	0
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1 11420.00	46.70	74.00	-27.30	57.29	38.79	16.11	65.49	0.00	300	0	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1 11420.00	45.62	74.00	-28.38	56.21	38.79	16.11	65.49	0.00	100	0	PEAK																																																																						

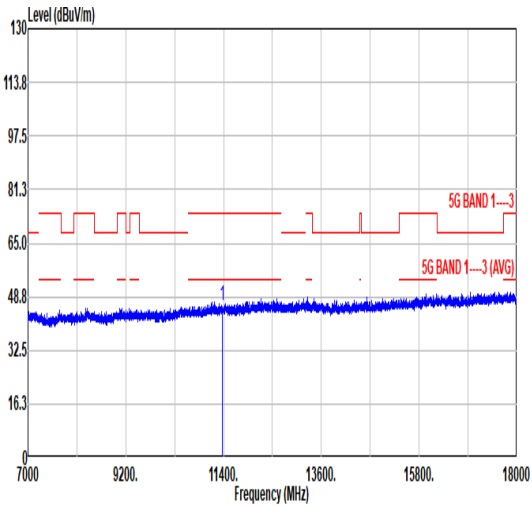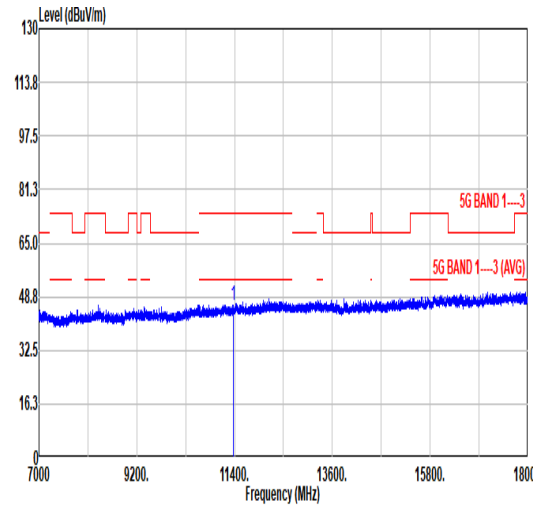

	41																																																																													
Mode	Harmonic																																																																													
	U-NII-2C-3_5.47-5.85_802.11ac_VHT80_CH138_5690MHz																																																																													
ANT	4																																																																													
Pol.	Horizontal	Vertical																																																																												
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a blue signal line fluctuating around 45 dBuV/m, with a red stepped limit line for 5G BAND 1-3. A vertical blue line is drawn at 11380 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11380.00</td> <td>45.89</td> <td>74.00</td> <td>-28.11</td> <td>56.55</td> <td>38.77</td> <td>16.09</td> <td>65.52</td> <td>0.00</td> <td>300 0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11380.00	45.89	74.00	-28.11	56.55	38.77	16.09	65.52	0.00	300 0 PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows a blue signal line fluctuating around 46 dBuV/m, with a red stepped limit line for 5G BAND 1-3. A vertical blue line is drawn at 11380 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11380.00</td> <td>46.25</td> <td>74.00</td> <td>-27.75</td> <td>56.91</td> <td>38.77</td> <td>16.09</td> <td>65.52</td> <td>0.00</td> <td>100 0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11380.00	46.25	74.00	-27.75	56.91	38.77	16.09	65.52	0.00	100 0 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 11380.00	45.89	74.00	-28.11	56.55	38.77	16.09	65.52	0.00	300 0 PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 11380.00	46.25	74.00	-27.75	56.91	38.77	16.09	65.52	0.00	100 0 PEAK																																																																					
Avg																																																																														



Mod e	42																																																																																																																																																											
	LF																																																																																																																																																											
	U-NII-2C_5.47-5.725_802.11ac VHT40_CH102_5510MHz																																																																																																																																																											
ANT	4																																																																																																																																																											
Pol.	Horizontal	Vertical																																																																																																																																																										
Peak Avg	<p>Data: 7</p> <p>Site : 03CH08-KS Condition : 5G BAND 1-----3 3m CBL 6111D 49922 HORIZONTAL Project : 15E mode : 5g 1-3 IMEI : : WIFI</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Over (dB)</th> <th>Limit (dB)</th> <th>ReadAntenna (dBuV)</th> <th>Cable Loss (dB/m)</th> <th>Preamp Loss (dB)</th> <th>A/Pos (cm)</th> <th>T/Pos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>106.63</td><td>20.25</td><td>-23.25</td><td>43.50</td><td>33.67</td><td>16.48</td><td>1.50</td><td>31.40</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>163.86</td><td>24.31</td><td>-19.19</td><td>43.50</td><td>38.04</td><td>15.82</td><td>1.85</td><td>31.40</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>214.30</td><td>29.21</td><td>-14.29</td><td>43.50</td><td>43.72</td><td>14.75</td><td>2.14</td><td>31.40</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>306.45</td><td>25.13</td><td>-20.87</td><td>46.00</td><td>34.83</td><td>19.13</td><td>2.57</td><td>31.40</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>360.77</td><td>25.32</td><td>-20.68</td><td>46.00</td><td>33.41</td><td>20.57</td><td>2.77</td><td>31.43</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>560.59</td><td>27.31</td><td>-18.69</td><td>46.00</td><td>29.08</td><td>26.24</td><td>3.44</td><td>31.45</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Over (dB)	Limit (dB)	ReadAntenna (dBuV)	Cable Loss (dB/m)	Preamp Loss (dB)	A/Pos (cm)	T/Pos (deg)	Remark	1	106.63	20.25	-23.25	43.50	33.67	16.48	1.50	31.40	---	Peak	2	163.86	24.31	-19.19	43.50	38.04	15.82	1.85	31.40	---	Peak	3	214.30	29.21	-14.29	43.50	43.72	14.75	2.14	31.40	---	Peak	4	306.45	25.13	-20.87	46.00	34.83	19.13	2.57	31.40	---	Peak	5	360.77	25.32	-20.68	46.00	33.41	20.57	2.77	31.43	---	Peak	6	560.59	27.31	-18.69	46.00	29.08	26.24	3.44	31.45	---	Peak	<p>Data: 8</p> <p>Site : 03CH08-KS Condition : 5G BAND 1-----3 3m CBL 6111D 49922 VERTICAL Project : 15E mode : 5g 1-3 IMEI : : WIFI</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Over (dB)</th> <th>Limit (dB)</th> <th>ReadAntenna (dBuV)</th> <th>Cable Loss (dB/m)</th> <th>Preamp Loss (dB)</th> <th>A/Pos (cm)</th> <th>T/Pos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>36.79</td><td>25.39</td><td>-14.61</td><td>40.00</td><td>35.01</td><td>21.20</td><td>0.58</td><td>31.40</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>88.20</td><td>22.97</td><td>-20.53</td><td>43.50</td><td>38.71</td><td>14.36</td><td>1.30</td><td>31.40</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>163.86</td><td>27.41</td><td>-16.09</td><td>43.50</td><td>41.14</td><td>15.82</td><td>1.85</td><td>31.40</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>202.66</td><td>25.93</td><td>-17.57</td><td>43.50</td><td>40.42</td><td>14.83</td><td>2.08</td><td>31.40</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>289.26</td><td>25.55</td><td>-20.45</td><td>46.00</td><td>35.85</td><td>18.65</td><td>2.45</td><td>31.40</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>562.53</td><td>26.60</td><td>-19.40</td><td>46.00</td><td>28.30</td><td>26.30</td><td>3.45</td><td>31.45</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Over (dB)	Limit (dB)	ReadAntenna (dBuV)	Cable Loss (dB/m)	Preamp Loss (dB)	A/Pos (cm)	T/Pos (deg)	Remark	1	36.79	25.39	-14.61	40.00	35.01	21.20	0.58	31.40	---	Peak	2	88.20	22.97	-20.53	43.50	38.71	14.36	1.30	31.40	---	Peak	3	163.86	27.41	-16.09	43.50	41.14	15.82	1.85	31.40	---	Peak	4	202.66	25.93	-17.57	43.50	40.42	14.83	2.08	31.40	---	Peak	5	289.26	25.55	-20.45	46.00	35.85	18.65	2.45	31.40	---	Peak	6	562.53	26.60	-19.40	46.00	28.30	26.30	3.45	31.45	---	Peak
Peak	Freq (MHz)	Level (dBuV/m)	Over (dB)	Limit (dB)	ReadAntenna (dBuV)	Cable Loss (dB/m)	Preamp Loss (dB)	A/Pos (cm)	T/Pos (deg)	Remark																																																																																																																																																		
1	106.63	20.25	-23.25	43.50	33.67	16.48	1.50	31.40	---	Peak																																																																																																																																																		
2	163.86	24.31	-19.19	43.50	38.04	15.82	1.85	31.40	---	Peak																																																																																																																																																		
3	214.30	29.21	-14.29	43.50	43.72	14.75	2.14	31.40	---	Peak																																																																																																																																																		
4	306.45	25.13	-20.87	46.00	34.83	19.13	2.57	31.40	---	Peak																																																																																																																																																		
5	360.77	25.32	-20.68	46.00	33.41	20.57	2.77	31.43	---	Peak																																																																																																																																																		
6	560.59	27.31	-18.69	46.00	29.08	26.24	3.44	31.45	---	Peak																																																																																																																																																		
Peak	Freq (MHz)	Level (dBuV/m)	Over (dB)	Limit (dB)	ReadAntenna (dBuV)	Cable Loss (dB/m)	Preamp Loss (dB)	A/Pos (cm)	T/Pos (deg)	Remark																																																																																																																																																		
1	36.79	25.39	-14.61	40.00	35.01	21.20	0.58	31.40	---	Peak																																																																																																																																																		
2	88.20	22.97	-20.53	43.50	38.71	14.36	1.30	31.40	---	Peak																																																																																																																																																		
3	163.86	27.41	-16.09	43.50	41.14	15.82	1.85	31.40	---	Peak																																																																																																																																																		
4	202.66	25.93	-17.57	43.50	40.42	14.83	2.08	31.40	---	Peak																																																																																																																																																		
5	289.26	25.55	-20.45	46.00	35.85	18.65	2.45	31.40	---	Peak																																																																																																																																																		
6	562.53	26.60	-19.40	46.00	28.30	26.30	3.45	31.45	---	Peak																																																																																																																																																		



<U NII-3>

Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 29	U-NII-3	5.725-5.85	4	802.11a	149	5745	6Mbps	-	-
Mode 30	U-NII-3	5.725-5.85	4	802.11a	157	5785	6Mbps	-	-
Mode 31	U-NII-3	5.725-5.85	4	802.11a	165	5825	6Mbps	-	-
Mode 32	U-NII-3	5.725-5.85	4	802.11ac VHT20	149	5745	MCS0	-	-
Mode 33	U-NII-3	5.725-5.85	4	802.11ac VHT20	157	5785	MCS0	-	-
Mode 34	U-NII-3	5.725-5.85	4	802.11ac VHT20	165	5825	MCS0	-	-
Mode 35	U-NII-3	5.725-5.85	4	802.11ac VHT40	151	5755	MCS0	-	-
Mode 36	U-NII-3	5.725-5.85	4	802.11ac VHT40	159	5795	MCS0	-	-
Mode 37	U-NII-3	5.725-5.85	4	802.11ac VHT80	155	5775	MCS0	-	-
Mode 43	U-NII-3	5.725-5.85	4	802.11a	165	5825	6Mbps	-	LF






Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
29	802.11a	149	5616.39	54.75	68.30	-13.55	H	PEAK	Pass	Band Edge
30	802.11a	157	11570.00	48.17	74.00	-25.83	H	PEAK	Pass	Harmonic
31	802.11a	165	5938.63	55.16	68.30	-13.14	H	PEAK	Pass	Band Edge
32	802.11ac VHT20	149	5605.37	54.74	68.30	-13.56	V	PEAK	Pass	Band Edge
33	802.11ac VHT20	157	11570.00	46.83	74.00	-27.17	V	PEAK	Pass	Harmonic
34	802.11ac VHT20	165	5929.25	55.25	68.30	-13.05	H	PEAK	Pass	Band Edge
35	802.11ac VHT40	151	5647.12	54.69	68.30	-13.61	H	PEAK	Pass	Band Edge
36	802.11ac VHT40	159	5925.36	54.34	68.30	-13.96	H	PEAK	Pass	Band Edge
37	802.11ac VHT80	155	5650.58	55.23	68.73	-13.50	H	PEAK	Pass	Band Edge
43	802.11a	165	31.94	24.76	40	-15.24	V	PEAK	Pass	LF



	29																																																																																																				
Mode	Band Edge																																																																																																				
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																				
ANT	4																																																																																																				
Pol.	Horizontal	Fundamental																																																																																																			
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5616.39</td> <td>54.75</td> <td>68.30</td> <td>-13.55</td> <td>41.50</td> <td>35.04</td> <td>11.20</td> <td>32.99</td> <td>0.00</td> <td>106 187 PEAK</td> </tr> <tr> <td>2</td> <td>5650.03</td> <td>53.96</td> <td>68.32</td> <td>-14.36</td> <td>40.61</td> <td>35.08</td> <td>11.24</td> <td>32.97</td> <td>0.00</td> <td>106 187 PEAK</td> </tr> <tr> <td>3</td> <td>5711.36</td> <td>70.88</td> <td>108.48</td> <td>-37.60</td> <td>57.41</td> <td>35.14</td> <td>11.29</td> <td>32.96</td> <td>0.00</td> <td>106 187 PEAK</td> </tr> <tr> <td>4</td> <td>5720.79</td> <td>72.68</td> <td>112.69</td> <td>-40.01</td> <td>59.18</td> <td>35.15</td> <td>11.30</td> <td>32.95</td> <td>0.00</td> <td>106 187 PEAK</td> </tr> </tbody> </table>		Limit Freq	Limit Level	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg		1	5616.39	54.75	68.30	-13.55	41.50	35.04	11.20	32.99	0.00	106 187 PEAK	2	5650.03	53.96	68.32	-14.36	40.61	35.08	11.24	32.97	0.00	106 187 PEAK	3	5711.36	70.88	108.48	-37.60	57.41	35.14	11.29	32.96	0.00	106 187 PEAK	4	5720.79	72.68	112.69	-40.01	59.18	35.15	11.30	32.95	0.00	106 187 PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>110.56</td> <td>96.99</td> <td>35.19</td> <td>11.33</td> <td>32.95</td> <td>0.00</td> <td>106</td> <td>187</td> <td>PEAK</td> </tr> </tbody> </table>		Limit Freq	Limit Level	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg		1	5745.00	110.56	96.99	35.19	11.33	32.95	0.00	106	187	PEAK
	Limit Freq	Limit Level	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																												
1	5616.39	54.75	68.30	-13.55	41.50	35.04	11.20	32.99	0.00	106 187 PEAK																																																																																											
2	5650.03	53.96	68.32	-14.36	40.61	35.08	11.24	32.97	0.00	106 187 PEAK																																																																																											
3	5711.36	70.88	108.48	-37.60	57.41	35.14	11.29	32.96	0.00	106 187 PEAK																																																																																											
4	5720.79	72.68	112.69	-40.01	59.18	35.15	11.30	32.95	0.00	106 187 PEAK																																																																																											
	Limit Freq	Limit Level	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																												
1	5745.00	110.56	96.99	35.19	11.33	32.95	0.00	106	187	PEAK																																																																																											
Avg	Blank	<table border="1"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>101.88</td> <td>88.31</td> <td>35.19</td> <td>11.33</td> <td>32.95</td> <td>0.00</td> <td>106</td> <td>187</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit Freq	Limit Level	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg		1	5745.00	101.88	88.31	35.19	11.33	32.95	0.00	106	187	AVERAGE																																																																		
	Limit Freq	Limit Level	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																												
1	5745.00	101.88	88.31	35.19	11.33	32.95	0.00	106	187	AVERAGE																																																																																											

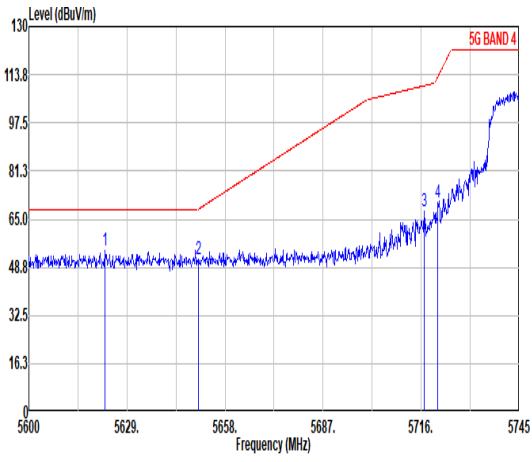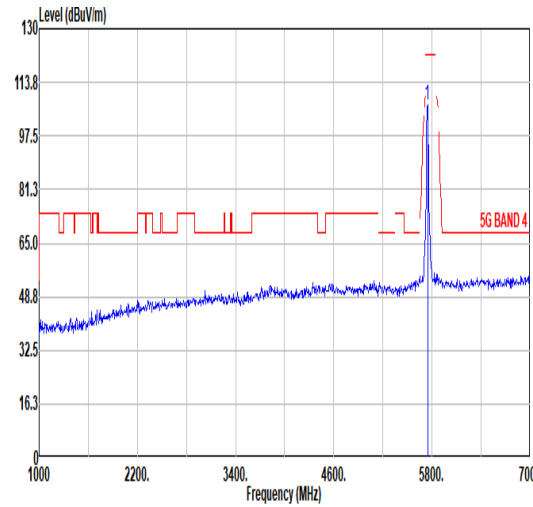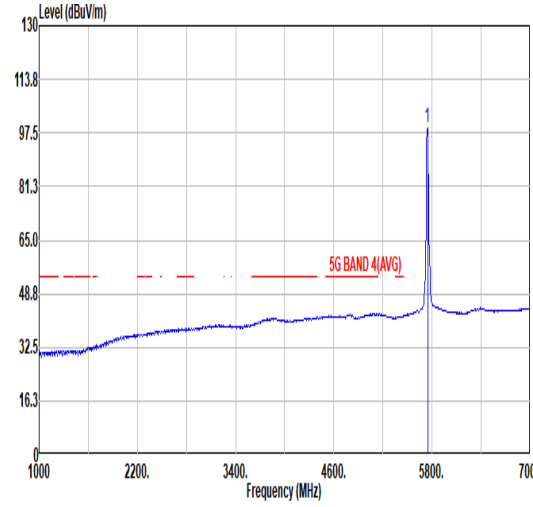

	29																																																																																																													
Mode	Band Edge																																																																																																													
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																													
ANT	4																																																																																																													
Pol.	Vertical	Fundamental																																																																																																												
Peak	 <table border="1" data-bbox="279 1064 813 1243"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5622.48</td> <td>54.64</td> <td>68.30</td> <td>-13.66</td> <td>41.37</td> <td>35.04</td> <td>11.21</td> <td>32.98</td> <td>0.00</td> <td>100</td> <td>20 PEAK</td> </tr> <tr> <td>2</td> <td>5650.03</td> <td>51.45</td> <td>68.32</td> <td>-16.87</td> <td>38.10</td> <td>35.08</td> <td>11.24</td> <td>32.97</td> <td>0.00</td> <td>100</td> <td>20 PEAK</td> </tr> <tr> <td>3</td> <td>5716.87</td> <td>67.63</td> <td>118.02</td> <td>-42.39</td> <td>54.13</td> <td>35.15</td> <td>11.30</td> <td>32.95</td> <td>0.00</td> <td>100</td> <td>20 PEAK</td> </tr> <tr> <td>4</td> <td>5720.93</td> <td>70.63</td> <td>113.02</td> <td>-42.39</td> <td>57.12</td> <td>35.16</td> <td>11.30</td> <td>32.95</td> <td>0.00</td> <td>100</td> <td>20 PEAK</td> </tr> </tbody> </table>		Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5622.48	54.64	68.30	-13.66	41.37	35.04	11.21	32.98	0.00	100	20 PEAK	2	5650.03	51.45	68.32	-16.87	38.10	35.08	11.24	32.97	0.00	100	20 PEAK	3	5716.87	67.63	118.02	-42.39	54.13	35.15	11.30	32.95	0.00	100	20 PEAK	4	5720.93	70.63	113.02	-42.39	57.12	35.16	11.30	32.95	0.00	100	20 PEAK	 <table border="1" data-bbox="877 1108 1412 1243"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>106.89</td> <td>-----</td> <td>-----</td> <td>93.32</td> <td>35.19</td> <td>11.33</td> <td>32.95</td> <td>0.00</td> <td>100</td> <td>20 PEAK</td> </tr> </tbody> </table>		Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5745.00	106.89	-----	-----	93.32	35.19	11.33	32.95	0.00	100	20 PEAK
	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	5622.48	54.64	68.30	-13.66	41.37	35.04	11.21	32.98	0.00	100	20 PEAK																																																																																																			
2	5650.03	51.45	68.32	-16.87	38.10	35.08	11.24	32.97	0.00	100	20 PEAK																																																																																																			
3	5716.87	67.63	118.02	-42.39	54.13	35.15	11.30	32.95	0.00	100	20 PEAK																																																																																																			
4	5720.93	70.63	113.02	-42.39	57.12	35.16	11.30	32.95	0.00	100	20 PEAK																																																																																																			
	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	5745.00	106.89	-----	-----	93.32	35.19	11.33	32.95	0.00	100	20 PEAK																																																																																																			
Avg	Blank	 <table border="1" data-bbox="877 1792 1412 1915"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>98.92</td> <td>-----</td> <td>-----</td> <td>85.35</td> <td>35.19</td> <td>11.33</td> <td>32.95</td> <td>0.00</td> <td>100</td> <td>20 AVERAGE</td> </tr> </tbody> </table>		Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5745.00	98.92	-----	-----	85.35	35.19	11.33	32.95	0.00	100	20 AVERAGE																																																																								
	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	5745.00	98.92	-----	-----	85.35	35.19	11.33	32.95	0.00	100	20 AVERAGE																																																																																																			



	29																																																																													
Mode	Harmonic																																																																													
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																													
ANT	4																																																																													
Pol.	Horizontal	Vertical																																																																												
Peak	<p>Level (dBuV/m) vs Frequency (MHz) for Horizontal Peak. Shows 5G BAND 4 and 5G BAND 4(AVG) traces.</p>	<p>Level (dBuV/m) vs Frequency (MHz) for Vertical Peak. Shows 5G BAND 4 and 5G BAND 4(AVG) traces.</p>																																																																												
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11490.00</td> <td>48.12</td> <td>74.00</td> <td>-25.88</td> <td>55.61</td> <td>38.84</td> <td>16.15</td> <td>62.48</td> <td>0.00</td> <td>300 360 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11490.00	48.12	74.00	-25.88	55.61	38.84	16.15	62.48	0.00	300 360 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11490.00</td> <td>48.45</td> <td>74.00</td> <td>-25.55</td> <td>55.94</td> <td>38.84</td> <td>16.15</td> <td>62.48</td> <td>0.00</td> <td>100 360 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11490.00	48.45	74.00	-25.55	55.94	38.84	16.15	62.48	0.00	100 360 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 11490.00	48.12	74.00	-25.88	55.61	38.84	16.15	62.48	0.00	300 360 PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 11490.00	48.45	74.00	-25.55	55.94	38.84	16.15	62.48	0.00	100 360 PEAK																																																																					






	30																																																																															
Mode	Harmonic																																																																															
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																															
ANT	4																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak	<p>Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. Shows 5G BAND 4 and 5G BAND 4(AVG) traces.</p>	<p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. Shows 5G BAND 4 and 5G BAND 4(AVG) traces.</p>																																																																														
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11578.00</td> <td>48.17</td> <td>74.00</td> <td>-25.83</td> <td>55.54</td> <td>38.90</td> <td>16.18</td> <td>62.45</td> <td>0.00</td> <td>298</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11578.00	48.17	74.00	-25.83	55.54	38.90	16.18	62.45	0.00	298	0 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11578.00</td> <td>47.92</td> <td>74.00</td> <td>-26.08</td> <td>55.29</td> <td>38.90</td> <td>16.18</td> <td>62.45</td> <td>0.00</td> <td>100</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11578.00	47.92	74.00	-26.08	55.29	38.90	16.18	62.45	0.00	100	0 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 11578.00	48.17	74.00	-25.83	55.54	38.90	16.18	62.45	0.00	298	0 PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 11578.00	47.92	74.00	-26.08	55.29	38.90	16.18	62.45	0.00	100	0 PEAK																																																																						



	31																																																																																																													
Mode	Band Edge																																																																																																													
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																																													
ANT	4																																																																																																													
Pol.	Horizontal	Fundamental																																																																																																												
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.88</td> <td>69.44</td> <td>111.18</td> <td>-41.74</td> <td>55.66</td> <td>35.32</td> <td>11.43</td> <td>32.97</td> <td>0.00</td> <td>100</td> <td>185 PEAK</td> </tr> <tr> <td>2</td> <td>5858.75</td> <td>70.29</td> <td>109.85</td> <td>-39.56</td> <td>56.50</td> <td>35.33</td> <td>11.43</td> <td>32.97</td> <td>0.00</td> <td>100</td> <td>185 PEAK</td> </tr> <tr> <td>3</td> <td>5924.63</td> <td>53.83</td> <td>68.58</td> <td>-14.75</td> <td>39.96</td> <td>35.41</td> <td>11.47</td> <td>33.01</td> <td>0.00</td> <td>100</td> <td>185 PEAK</td> </tr> <tr> <td>4</td> <td>5938.63</td> <td>55.16</td> <td>68.30</td> <td>-13.14</td> <td>41.27</td> <td>35.43</td> <td>11.48</td> <td>33.02</td> <td>0.00</td> <td>100</td> <td>185 PEAK</td> </tr> </tbody> </table>		Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	Aux Loss	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5854.88	69.44	111.18	-41.74	55.66	35.32	11.43	32.97	0.00	100	185 PEAK	2	5858.75	70.29	109.85	-39.56	56.50	35.33	11.43	32.97	0.00	100	185 PEAK	3	5924.63	53.83	68.58	-14.75	39.96	35.41	11.47	33.01	0.00	100	185 PEAK	4	5938.63	55.16	68.30	-13.14	41.27	35.43	11.48	33.02	0.00	100	185 PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>111.03</td> <td>-----</td> <td>-----</td> <td>97.29</td> <td>35.28</td> <td>11.41</td> <td>32.95</td> <td>0.00</td> <td>100</td> <td>185 PEAK</td> </tr> </tbody> </table>		Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	Aux Loss	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5825.00	111.03	-----	-----	97.29	35.28	11.41	32.95	0.00	100	185 PEAK
	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	Aux Loss	APos	TPos	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	5854.88	69.44	111.18	-41.74	55.66	35.32	11.43	32.97	0.00	100	185 PEAK																																																																																																			
2	5858.75	70.29	109.85	-39.56	56.50	35.33	11.43	32.97	0.00	100	185 PEAK																																																																																																			
3	5924.63	53.83	68.58	-14.75	39.96	35.41	11.47	33.01	0.00	100	185 PEAK																																																																																																			
4	5938.63	55.16	68.30	-13.14	41.27	35.43	11.48	33.02	0.00	100	185 PEAK																																																																																																			
	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	Aux Loss	APos	TPos	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	5825.00	111.03	-----	-----	97.29	35.28	11.41	32.95	0.00	100	185 PEAK																																																																																																			
Avg	Blank	<table border="1"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>102.46</td> <td>-----</td> <td>-----</td> <td>88.72</td> <td>35.28</td> <td>11.41</td> <td>32.95</td> <td>0.00</td> <td>100</td> <td>185 AVERAGE</td> </tr> </tbody> </table>		Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	Aux Loss	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5825.00	102.46	-----	-----	88.72	35.28	11.41	32.95	0.00	100	185 AVERAGE																																																																								
	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	Aux Loss	APos	TPos	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	5825.00	102.46	-----	-----	88.72	35.28	11.41	32.95	0.00	100	185 AVERAGE																																																																																																			

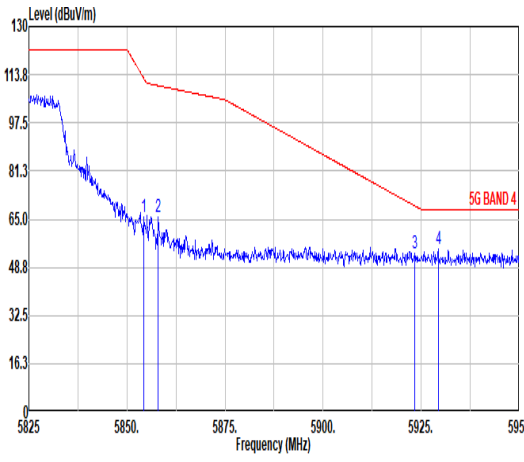
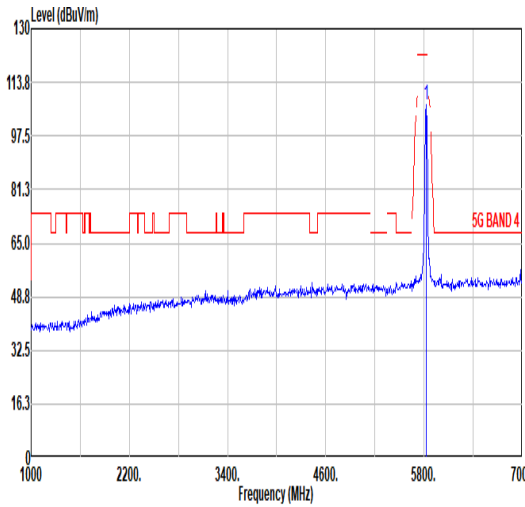
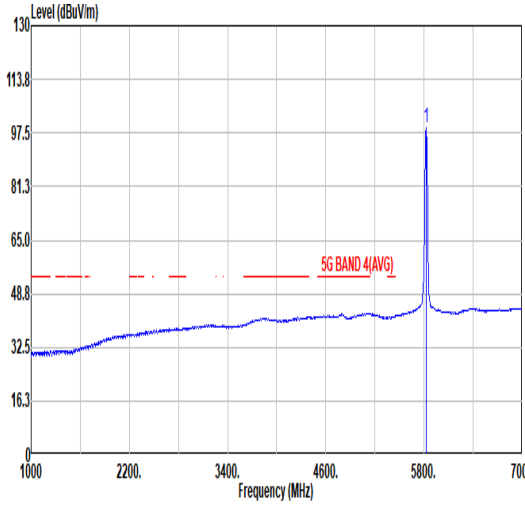


	31																																																																																																													
Mode	Band Edge																																																																																																													
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																																													
ANT	4																																																																																																													
Pol.	Vertical	Fundamental																																																																																																												
Peak	 <table border="1" data-bbox="279 1052 805 1243"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Level</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.38</td> <td>65.68</td> <td>112.32</td> <td>-46.64</td> <td>51.90</td> <td>35.32</td> <td>11.43</td> <td>32.97</td> <td>0.00</td> <td>104</td> <td>19 PEAK</td> </tr> <tr> <td>2</td> <td>5858.00</td> <td>65.65</td> <td>110.06</td> <td>-44.41</td> <td>51.86</td> <td>35.33</td> <td>11.43</td> <td>32.97</td> <td>0.00</td> <td>104</td> <td>19 PEAK</td> </tr> <tr> <td>3</td> <td>5923.38</td> <td>53.29</td> <td>69.50</td> <td>-16.21</td> <td>39.42</td> <td>35.41</td> <td>11.47</td> <td>33.01</td> <td>0.00</td> <td>104</td> <td>19 PEAK</td> </tr> <tr> <td>4</td> <td>5929.38</td> <td>54.80</td> <td>68.30</td> <td>-13.50</td> <td>40.92</td> <td>35.42</td> <td>11.48</td> <td>33.02</td> <td>0.00</td> <td>104</td> <td>19 PEAK</td> </tr> </tbody> </table>		Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5854.38	65.68	112.32	-46.64	51.90	35.32	11.43	32.97	0.00	104	19 PEAK	2	5858.00	65.65	110.06	-44.41	51.86	35.33	11.43	32.97	0.00	104	19 PEAK	3	5923.38	53.29	69.50	-16.21	39.42	35.41	11.47	33.01	0.00	104	19 PEAK	4	5929.38	54.80	68.30	-13.50	40.92	35.42	11.48	33.02	0.00	104	19 PEAK	 <table border="1" data-bbox="885 1108 1412 1243"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Level</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>107.08</td> <td>-----</td> <td>93.34</td> <td>35.28</td> <td>11.41</td> <td>32.95</td> <td>0.00</td> <td>104</td> <td>19</td> <td>PEAK</td> </tr> </tbody> </table>		Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5825.00	107.08	-----	93.34	35.28	11.41	32.95	0.00	104	19	PEAK
	Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																																																																			
	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																				
1	5854.38	65.68	112.32	-46.64	51.90	35.32	11.43	32.97	0.00	104	19 PEAK																																																																																																			
2	5858.00	65.65	110.06	-44.41	51.86	35.33	11.43	32.97	0.00	104	19 PEAK																																																																																																			
3	5923.38	53.29	69.50	-16.21	39.42	35.41	11.47	33.01	0.00	104	19 PEAK																																																																																																			
4	5929.38	54.80	68.30	-13.50	40.92	35.42	11.48	33.02	0.00	104	19 PEAK																																																																																																			
	Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																																																																			
	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																				
1	5825.00	107.08	-----	93.34	35.28	11.41	32.95	0.00	104	19	PEAK																																																																																																			
Avg	Blank	 <table border="1" data-bbox="885 1792 1412 1915"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Level</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>99.17</td> <td>-----</td> <td>85.43</td> <td>35.28</td> <td>11.41</td> <td>32.95</td> <td>0.00</td> <td>104</td> <td>19</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5825.00	99.17	-----	85.43	35.28	11.41	32.95	0.00	104	19	AVERAGE																																																																								
	Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																																																																			
	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																				
1	5825.00	99.17	-----	85.43	35.28	11.41	32.95	0.00	104	19	AVERAGE																																																																																																			






	31																																																																														
Mode	Harmonic																																																																														
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																														
ANT	4																																																																														
Pol.	Horizontal	Vertical																																																																													
Peak																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11650.00</td> <td>45.60</td> <td>74.00</td> <td>-28.40</td> <td>55.78</td> <td>38.96</td> <td>16.23</td> <td>65.37</td> <td>0.00</td> <td>300</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11650.00	45.60	74.00	-28.40	55.78	38.96	16.23	65.37	0.00	300	0 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11650.00</td> <td>45.88</td> <td>74.00</td> <td>-28.12</td> <td>56.06</td> <td>38.96</td> <td>16.23</td> <td>65.37</td> <td>0.00</td> <td>100</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11650.00	45.88	74.00	-28.12	56.06	38.96	16.23	65.37	0.00	100
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1 11650.00	45.60	74.00	-28.40	55.78	38.96	16.23	65.37	0.00	300	0 PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1 11650.00	45.88	74.00	-28.12	56.06	38.96	16.23	65.37	0.00	100	0 PEAK																																																																					
Avg																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11650.00</td> <td>45.88</td> <td>74.00</td> <td>-28.12</td> <td>56.06</td> <td>38.96</td> <td>16.23</td> <td>65.37</td> <td>0.00</td> <td>100</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11650.00	45.88	74.00	-28.12	56.06	38.96	16.23	65.37	0.00	100	0 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11650.00</td> <td>45.88</td> <td>74.00</td> <td>-28.12</td> <td>56.06</td> <td>38.96</td> <td>16.23</td> <td>65.37</td> <td>0.00</td> <td>100</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11650.00	45.88	74.00	-28.12	56.06	38.96	16.23	65.37	0.00	100
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1 11650.00	45.88	74.00	-28.12	56.06	38.96	16.23	65.37	0.00	100	0 PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1 11650.00	45.88	74.00	-28.12	56.06	38.96	16.23	65.37	0.00	100	0 PEAK																																																																					

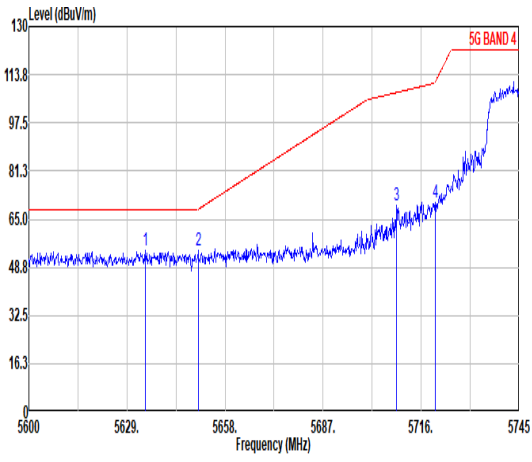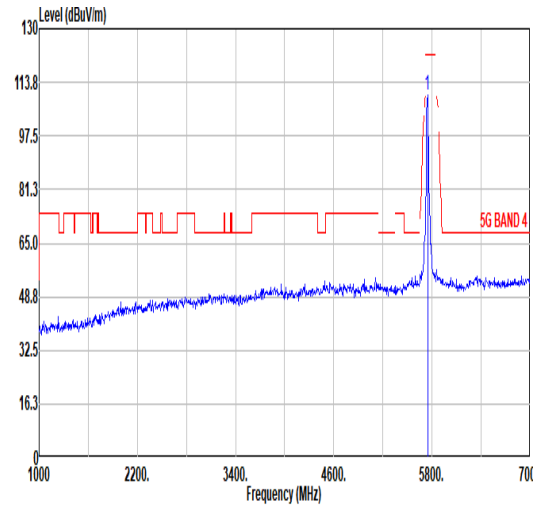
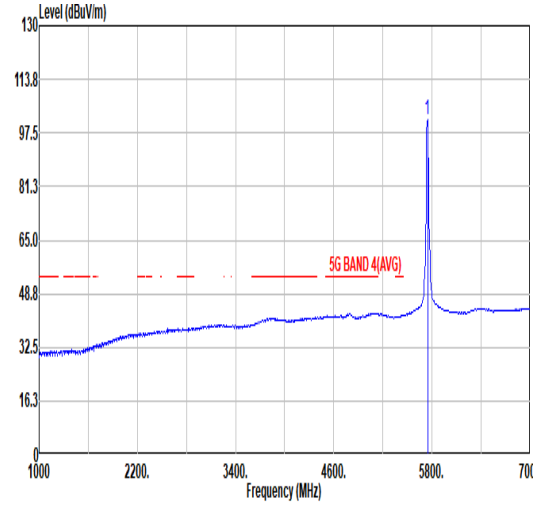


	32																																																																																																																		
Mode	Band Edge																																																																																																																		
	U-NII-3_5.725-5.85_802.11ac VHT20_CH149_5745MHz																																																																																																																		
ANT	4																																																																																																																		
Pol.	Horizontal	Fundamental																																																																																																																	
Peak	 <table border="1" data-bbox="279 1052 813 1243"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5634.37</td> <td>54.43</td> <td>68.30</td> <td>-13.87</td> <td>41.13</td> <td>35.06</td> <td>11.22</td> <td>32.98</td> <td>0.00</td> <td>106</td> <td>236</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.03</td> <td>54.64</td> <td>68.32</td> <td>-13.68</td> <td>41.29</td> <td>35.08</td> <td>11.24</td> <td>32.97</td> <td>0.00</td> <td>106</td> <td>236</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5708.75</td> <td>69.80</td> <td>107.75</td> <td>-37.95</td> <td>56.33</td> <td>35.14</td> <td>11.29</td> <td>32.96</td> <td>0.00</td> <td>106</td> <td>236</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.21</td> <td>70.62</td> <td>111.37</td> <td>-40.75</td> <td>57.12</td> <td>35.15</td> <td>11.30</td> <td>32.95</td> <td>0.00</td> <td>106</td> <td>236</td> <td>PEAK</td> </tr> </tbody> </table>		Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5634.37	54.43	68.30	-13.87	41.13	35.06	11.22	32.98	0.00	106	236	PEAK	2	5650.03	54.64	68.32	-13.68	41.29	35.08	11.24	32.97	0.00	106	236	PEAK	3	5708.75	69.80	107.75	-37.95	56.33	35.14	11.29	32.96	0.00	106	236	PEAK	4	5720.21	70.62	111.37	-40.75	57.12	35.15	11.30	32.95	0.00	106	236	PEAK	 <table border="1" data-bbox="877 1108 1412 1243"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>109.98</td> <td>-----</td> <td>-----</td> <td>96.41</td> <td>35.19</td> <td>11.33</td> <td>32.95</td> <td>0.00</td> <td>106</td> <td>236</td> <td>PEAK</td> </tr> </tbody> </table>		Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	109.98	-----	-----	96.41	35.19	11.33	32.95	0.00	106	236	PEAK
	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																								
1	5634.37	54.43	68.30	-13.87	41.13	35.06	11.22	32.98	0.00	106	236	PEAK																																																																																																							
2	5650.03	54.64	68.32	-13.68	41.29	35.08	11.24	32.97	0.00	106	236	PEAK																																																																																																							
3	5708.75	69.80	107.75	-37.95	56.33	35.14	11.29	32.96	0.00	106	236	PEAK																																																																																																							
4	5720.21	70.62	111.37	-40.75	57.12	35.15	11.30	32.95	0.00	106	236	PEAK																																																																																																							
	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																								
1	5745.00	109.98	-----	-----	96.41	35.19	11.33	32.95	0.00	106	236	PEAK																																																																																																							
Avg	Blank	 <table border="1" data-bbox="877 1792 1412 1915"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>101.70</td> <td>-----</td> <td>-----</td> <td>88.13</td> <td>35.19</td> <td>11.33</td> <td>32.95</td> <td>0.00</td> <td>106</td> <td>236</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	101.70	-----	-----	88.13	35.19	11.33	32.95	0.00	106	236	AVERAGE																																																																												
	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																								
1	5745.00	101.70	-----	-----	88.13	35.19	11.33	32.95	0.00	106	236	AVERAGE																																																																																																							

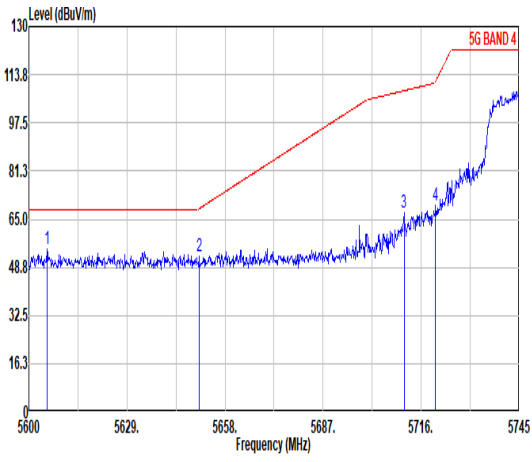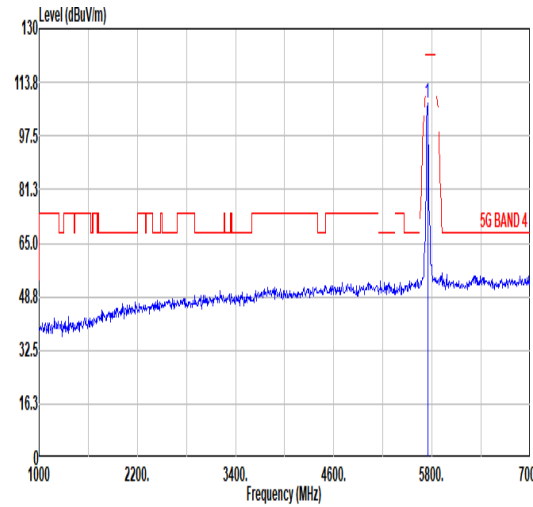
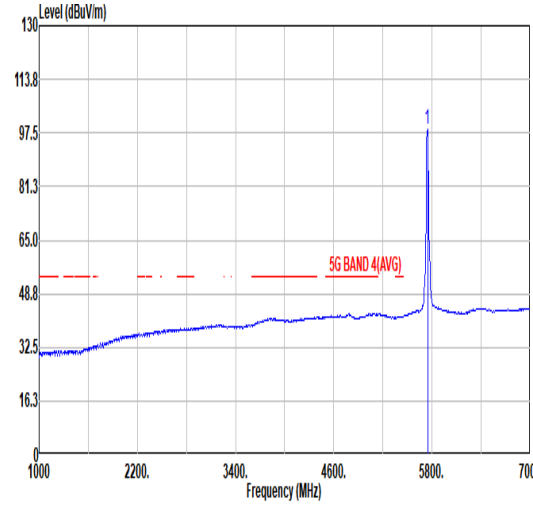


	32																																																																																																													
Mode	Band Edge																																																																																																													
	U-NII-3_5.725-5.85_802.11ac VHT20_CH149_5745MHz																																																																																																													
ANT	4																																																																																																													
Pol.	Vertical	Fundamental																																																																																																												
Peak	 <table border="1" data-bbox="279 1064 813 1243"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5685.37</td> <td>54.74</td> <td>68.30</td> <td>-13.56</td> <td>41.51</td> <td>35.03</td> <td>11.19</td> <td>32.99</td> <td>0.00</td> <td>101</td> <td>18 PEAK</td> </tr> <tr> <td>2</td> <td>5650.32</td> <td>52.54</td> <td>68.53</td> <td>-15.99</td> <td>39.19</td> <td>35.08</td> <td>11.24</td> <td>32.97</td> <td>0.00</td> <td>101</td> <td>18 PEAK</td> </tr> <tr> <td>3</td> <td>5710.93</td> <td>67.43</td> <td>108.36</td> <td>-40.93</td> <td>53.96</td> <td>35.14</td> <td>11.29</td> <td>32.96</td> <td>0.00</td> <td>101</td> <td>18 PEAK</td> </tr> <tr> <td>4</td> <td>5720.21</td> <td>69.49</td> <td>111.37</td> <td>-41.88</td> <td>55.99</td> <td>35.15</td> <td>11.30</td> <td>32.95</td> <td>0.00</td> <td>101</td> <td>18 PEAK</td> </tr> </tbody> </table>		Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5685.37	54.74	68.30	-13.56	41.51	35.03	11.19	32.99	0.00	101	18 PEAK	2	5650.32	52.54	68.53	-15.99	39.19	35.08	11.24	32.97	0.00	101	18 PEAK	3	5710.93	67.43	108.36	-40.93	53.96	35.14	11.29	32.96	0.00	101	18 PEAK	4	5720.21	69.49	111.37	-41.88	55.99	35.15	11.30	32.95	0.00	101	18 PEAK	 <table border="1" data-bbox="877 1108 1412 1243"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>107.53</td> <td>-----</td> <td>-----</td> <td>93.96</td> <td>35.19</td> <td>11.33</td> <td>32.95</td> <td>0.00</td> <td>101</td> <td>18 PEAK</td> </tr> </tbody> </table>		Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	107.53	-----	-----	93.96	35.19	11.33	32.95	0.00	101	18 PEAK
	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																			
1	5685.37	54.74	68.30	-13.56	41.51	35.03	11.19	32.99	0.00	101	18 PEAK																																																																																																			
2	5650.32	52.54	68.53	-15.99	39.19	35.08	11.24	32.97	0.00	101	18 PEAK																																																																																																			
3	5710.93	67.43	108.36	-40.93	53.96	35.14	11.29	32.96	0.00	101	18 PEAK																																																																																																			
4	5720.21	69.49	111.37	-41.88	55.99	35.15	11.30	32.95	0.00	101	18 PEAK																																																																																																			
	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																			
1	5745.00	107.53	-----	-----	93.96	35.19	11.33	32.95	0.00	101	18 PEAK																																																																																																			
Avg	Blank	 <table border="1" data-bbox="877 1792 1412 1915"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>98.82</td> <td>-----</td> <td>-----</td> <td>85.25</td> <td>35.19</td> <td>11.33</td> <td>32.95</td> <td>0.00</td> <td>101</td> <td>18 AVERAGE</td> </tr> </tbody> </table>		Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5745.00	98.82	-----	-----	85.25	35.19	11.33	32.95	0.00	101	18 AVERAGE																																																																								
	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																			
1	5745.00	98.82	-----	-----	85.25	35.19	11.33	32.95	0.00	101	18 AVERAGE																																																																																																			

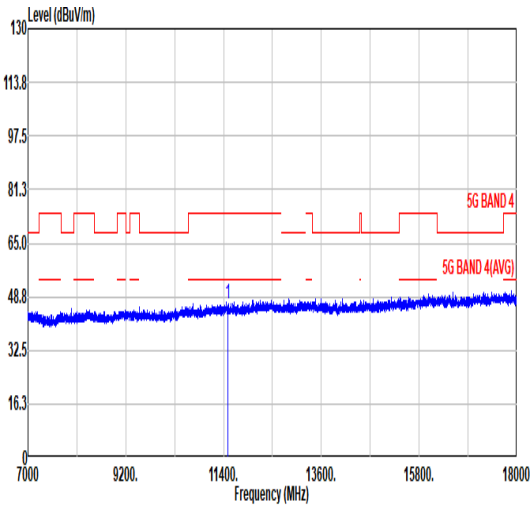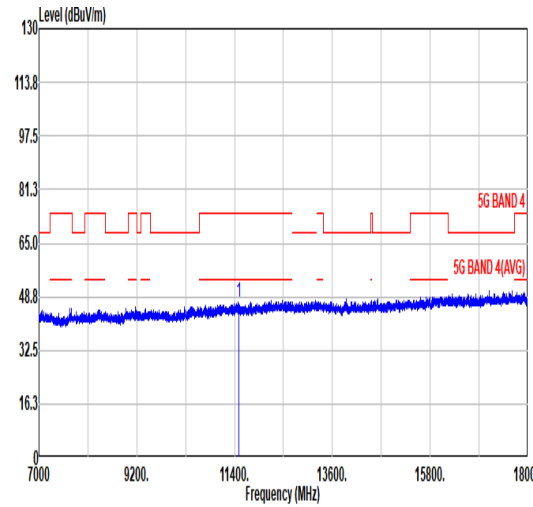

	32																																																																																	
Mode	Harmonic																																																																																	
	U-NII-3_5.725-5.85_802.11ac VHT20_CH149_5745MHz																																																																																	
ANT	4																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. Shows 5G BAND 4 and 5G BAND 4(AVG) traces. A peak is visible at 11490.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11490.00</td> <td>46.45</td> <td>74.00</td> <td>-27.55</td> <td>56.92</td> <td>38.84</td> <td>16.15</td> <td>65.46</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11490.00	46.45	74.00	-27.55	56.92	38.84	16.15	65.46	0.00	300	0	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. Shows 5G BAND 4 and 5G BAND 4(AVG) traces. A peak is visible at 11490.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11490.00</td> <td>46.90</td> <td>74.00</td> <td>-27.10</td> <td>57.37</td> <td>38.84</td> <td>16.15</td> <td>65.46</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11490.00	46.90	74.00	-27.10	57.37	38.84	16.15	65.46	0.00	100	0	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 11490.00	46.45	74.00	-27.55	56.92	38.84	16.15	65.46	0.00	300	0	PEAK																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 11490.00	46.90	74.00	-27.10	57.37	38.84	16.15	65.46	0.00	100	0	PEAK																																																																							
Avg																																																																																		


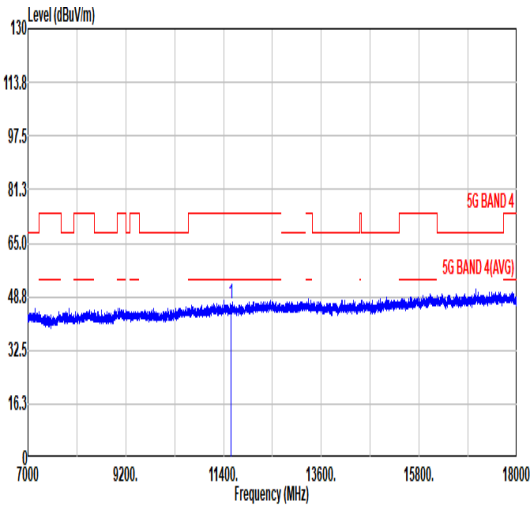
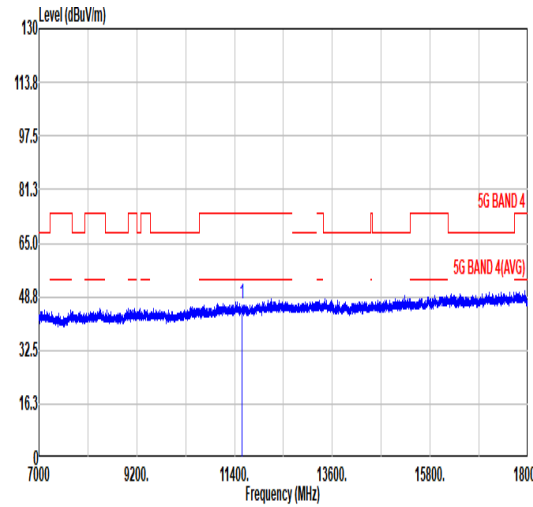


	33																																																																																	
Mode	Harmonic																																																																																	
	U-NII-3_5.725-5.85_802.11ac VHT20_CH157_5785MHz																																																																																	
ANT	4																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a red line for 5G BAND 4 and a blue line for 5G BAND 4(AVG). A vertical blue line is at 11400 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11570.00</td> <td>46.41</td> <td>74.00</td> <td>-27.59</td> <td>56.74</td> <td>38.90</td> <td>16.18</td> <td>65.41</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11570.00	46.41	74.00	-27.59	56.74	38.90	16.18	65.41	0.00	300	0	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows a red line for 5G BAND 4 and a blue line for 5G BAND 4(AVG). A vertical blue line is at 11400 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11570.00</td> <td>46.83</td> <td>74.00</td> <td>-27.17</td> <td>57.16</td> <td>38.90</td> <td>16.18</td> <td>65.41</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11570.00	46.83	74.00	-27.17	57.16	38.90	16.18	65.41	0.00	100	0	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 11570.00	46.41	74.00	-27.59	56.74	38.90	16.18	65.41	0.00	300	0	PEAK																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 11570.00	46.83	74.00	-27.17	57.16	38.90	16.18	65.41	0.00	100	0	PEAK																																																																							
Avg																																																																																		



	34																																																																																																																												
Mode	Band Edge																																																																																																																												
	U-NII-3_5.725-5.85_802.11ac VHT20_CH165_5825MHz																																																																																																																												
ANT	4																																																																																																																												
Pol.	Horizontal	Fundamental																																																																																																																											
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.88</td> <td>70.28</td> <td>111.18</td> <td>-40.90</td> <td>56.50</td> <td>35.32</td> <td>11.43</td> <td>32.97</td> <td>0.00</td> <td>182</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5856.75</td> <td>71.04</td> <td>110.41</td> <td>-39.37</td> <td>57.26</td> <td>35.32</td> <td>11.43</td> <td>32.97</td> <td>0.00</td> <td>188</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.13</td> <td>55.52</td> <td>68.94</td> <td>-13.42</td> <td>41.65</td> <td>35.41</td> <td>11.47</td> <td>33.01</td> <td>0.00</td> <td>108</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5929.25</td> <td>55.25</td> <td>68.30</td> <td>-13.05</td> <td>41.37</td> <td>35.42</td> <td>11.48</td> <td>33.02</td> <td>0.00</td> <td>108</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Peak	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.88	70.28	111.18	-40.90	56.50	35.32	11.43	32.97	0.00	182	PEAK	2	5856.75	71.04	110.41	-39.37	57.26	35.32	11.43	32.97	0.00	188	PEAK	3	5924.13	55.52	68.94	-13.42	41.65	35.41	11.47	33.01	0.00	108	PEAK	4	5929.25	55.25	68.30	-13.05	41.37	35.42	11.48	33.02	0.00	108	PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>110.76</td> <td>-----</td> <td>-----</td> <td>97.02</td> <td>35.28</td> <td>11.41</td> <td>32.95</td> <td>0.00</td> <td>108</td> <td>182</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Peak	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	110.76	-----	-----	97.02	35.28	11.41	32.95	0.00	108	182	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Peak	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	5854.88	70.28	111.18	-40.90	56.50	35.32	11.43	32.97	0.00	182	PEAK																																																																																																																		
2	5856.75	71.04	110.41	-39.37	57.26	35.32	11.43	32.97	0.00	188	PEAK																																																																																																																		
3	5924.13	55.52	68.94	-13.42	41.65	35.41	11.47	33.01	0.00	108	PEAK																																																																																																																		
4	5929.25	55.25	68.30	-13.05	41.37	35.42	11.48	33.02	0.00	108	PEAK																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Peak	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	5825.00	110.76	-----	-----	97.02	35.28	11.41	32.95	0.00	108	182	PEAK																																																																																																																	
Avg	Blank	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Avg</th> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>102.96</td> <td>-----</td> <td>-----</td> <td>89.22</td> <td>35.28</td> <td>11.41</td> <td>32.95</td> <td>0.00</td> <td>108</td> <td>182</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Avg	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	102.96	-----	-----	89.22	35.28	11.41	32.95	0.00	108	182	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Avg	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	5825.00	102.96	-----	-----	89.22	35.28	11.41	32.95	0.00	108	182	AVERAGE																																																																																																																	

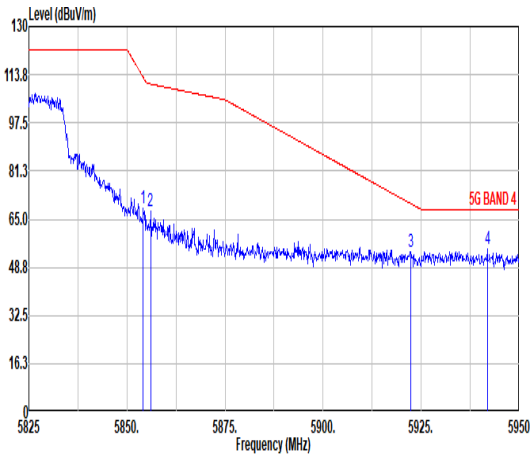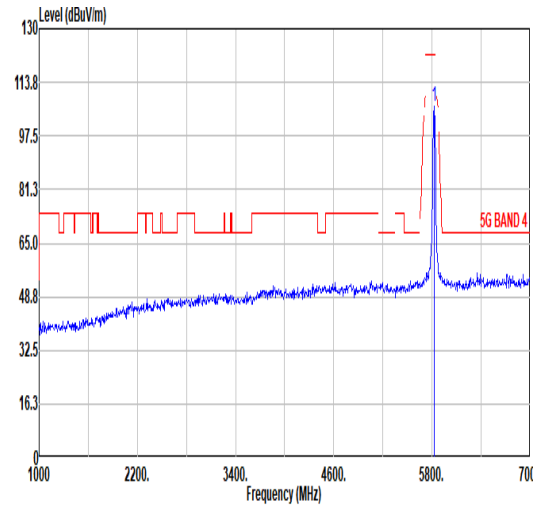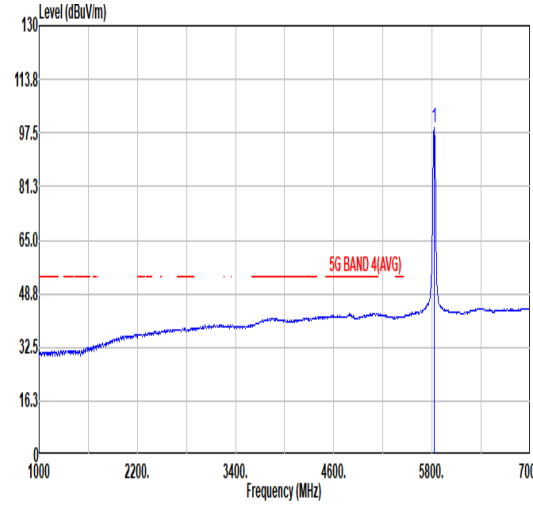

	34																																																																																																																											
Mode	Band Edge																																																																																																																											
	U-NII-3_5.725-5.85_802.11ac VHT20_CH165_5825MHz																																																																																																																											
ANT	4																																																																																																																											
Pol.	Vertical	Fundamental																																																																																																																										
Peak	 <table border="1" data-bbox="279 1064 813 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.13</td> <td>68.82</td> <td>112.89</td> <td>-44.07</td> <td>55.04</td> <td>35.32</td> <td>11.43</td> <td>32.97</td> <td>0.00</td> <td>101</td> <td>17 PEAK</td> </tr> <tr> <td>2</td> <td>5856.00</td> <td>67.69</td> <td>110.62</td> <td>-42.93</td> <td>53.91</td> <td>35.32</td> <td>11.43</td> <td>32.97</td> <td>0.00</td> <td>101</td> <td>17 PEAK</td> </tr> <tr> <td>3</td> <td>5922.25</td> <td>54.00</td> <td>70.33</td> <td>-16.33</td> <td>40.13</td> <td>35.41</td> <td>11.47</td> <td>33.01</td> <td>0.00</td> <td>101</td> <td>17 PEAK</td> </tr> <tr> <td>4</td> <td>5941.88</td> <td>54.75</td> <td>68.30</td> <td>-13.55</td> <td>40.86</td> <td>35.43</td> <td>11.49</td> <td>33.03</td> <td>0.00</td> <td>101</td> <td>17 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Peak	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.13	68.82	112.89	-44.07	55.04	35.32	11.43	32.97	0.00	101	17 PEAK	2	5856.00	67.69	110.62	-42.93	53.91	35.32	11.43	32.97	0.00	101	17 PEAK	3	5922.25	54.00	70.33	-16.33	40.13	35.41	11.47	33.01	0.00	101	17 PEAK	4	5941.88	54.75	68.30	-13.55	40.86	35.43	11.49	33.03	0.00	101	17 PEAK	 <table border="1" data-bbox="877 1108 1412 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>106.35</td> <td>-----</td> <td>-----</td> <td>92.61</td> <td>35.28</td> <td>11.41</td> <td>32.95</td> <td>0.00</td> <td>101</td> <td>17 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Peak	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	106.35	-----	-----	92.61	35.28	11.41	32.95	0.00	101	17 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Peak	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5854.13	68.82	112.89	-44.07	55.04	35.32	11.43	32.97	0.00	101	17 PEAK																																																																																																																	
2	5856.00	67.69	110.62	-42.93	53.91	35.32	11.43	32.97	0.00	101	17 PEAK																																																																																																																	
3	5922.25	54.00	70.33	-16.33	40.13	35.41	11.47	33.01	0.00	101	17 PEAK																																																																																																																	
4	5941.88	54.75	68.30	-13.55	40.86	35.43	11.49	33.03	0.00	101	17 PEAK																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Peak	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5825.00	106.35	-----	-----	92.61	35.28	11.41	32.95	0.00	101	17 PEAK																																																																																																																	
Avg	Blank	 <table border="1" data-bbox="877 1792 1412 1915"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Avg</th> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>98.97</td> <td>-----</td> <td>-----</td> <td>85.23</td> <td>35.28</td> <td>11.41</td> <td>32.95</td> <td>0.00</td> <td>101</td> <td>17 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Avg	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	98.97	-----	-----	85.23	35.28	11.41	32.95	0.00	101	17 AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Avg	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5825.00	98.97	-----	-----	85.23	35.28	11.41	32.95	0.00	101	17 AVERAGE																																																																																																																	



	34																																																																																	
Mode	Harmonic																																																																																	
	U-NII-3_5.725-5.85_802.11ac VHT20_CH165_5825MHz																																																																																	
ANT	4																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak	<p>Level (dBuV/m) vs Frequency (MHz) for Horizontal Peak. The plot shows a red stepped line for '5G BAND 4' and a blue noisy line for '5G BAND 4(AVG)'. A vertical blue line is at 11400 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11650.00</td> <td>46.33</td> <td>74.00</td> <td>-27.67</td> <td>56.51</td> <td>38.96</td> <td>16.23</td> <td>65.37</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11650.00	46.33	74.00	-27.67	56.51	38.96	16.23	65.37	0.00	300	0	PEAK	<p>Level (dBuV/m) vs Frequency (MHz) for Vertical Peak. The plot shows a red stepped line for '5G BAND 4' and a blue noisy line for '5G BAND 4(AVG)'. A vertical blue line is at 11400 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11650.00</td> <td>46.47</td> <td>74.00</td> <td>-27.53</td> <td>56.65</td> <td>38.96</td> <td>16.23</td> <td>65.37</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11650.00	46.47	74.00	-27.53	56.65	38.96	16.23	65.37	0.00	100	0	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 11650.00	46.33	74.00	-27.67	56.51	38.96	16.23	65.37	0.00	300	0	PEAK																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 11650.00	46.47	74.00	-27.53	56.65	38.96	16.23	65.37	0.00	100	0	PEAK																																																																							
Avg	<p>Level (dBuV/m) vs Frequency (MHz) for Horizontal Avg. The plot shows a red stepped line for '5G BAND 4' and a blue noisy line for '5G BAND 4(AVG)'. A vertical blue line is at 11400 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11650.00</td> <td>46.33</td> <td>74.00</td> <td>-27.67</td> <td>56.51</td> <td>38.96</td> <td>16.23</td> <td>65.37</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11650.00	46.33	74.00	-27.67	56.51	38.96	16.23	65.37	0.00	300	0	PEAK	<p>Level (dBuV/m) vs Frequency (MHz) for Vertical Avg. The plot shows a red stepped line for '5G BAND 4' and a blue noisy line for '5G BAND 4(AVG)'. A vertical blue line is at 11400 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11650.00</td> <td>46.47</td> <td>74.00</td> <td>-27.53</td> <td>56.65</td> <td>38.96</td> <td>16.23</td> <td>65.37</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11650.00	46.47	74.00	-27.53	56.65	38.96	16.23	65.37	0.00	100	0	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 11650.00	46.33	74.00	-27.67	56.51	38.96	16.23	65.37	0.00	300	0	PEAK																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 11650.00	46.47	74.00	-27.53	56.65	38.96	16.23	65.37	0.00	100	0	PEAK																																																																							



	35																																																																																																																																
Mode	Band Edge - L																																																																																																																																
	U-NII-3_5.725-5.85_802.11ac VHT40_CH151_5755MHz																																																																																																																																
ANT	4																																																																																																																																
Pol.	Horizontal	Fundamental																																																																																																																															
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5647.12</td> <td>54.69</td> <td>68.30</td> <td>-13.61</td> <td>41.37</td> <td>35.07</td> <td>11.23</td> <td>32.98</td> <td>0.00</td> <td>100</td> <td>236</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.07</td> <td>53.23</td> <td>68.35</td> <td>-15.12</td> <td>39.88</td> <td>35.08</td> <td>11.24</td> <td>32.97</td> <td>0.00</td> <td>100</td> <td>236</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5719.04</td> <td>71.32</td> <td>110.63</td> <td>-39.31</td> <td>57.82</td> <td>35.15</td> <td>11.30</td> <td>32.95</td> <td>0.00</td> <td>100</td> <td>236</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.13</td> <td>70.95</td> <td>111.19</td> <td>-40.24</td> <td>57.45</td> <td>35.15</td> <td>11.30</td> <td>32.95</td> <td>0.00</td> <td>100</td> <td>236</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Peak	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5647.12	54.69	68.30	-13.61	41.37	35.07	11.23	32.98	0.00	100	236	PEAK	2	5650.07	53.23	68.35	-15.12	39.88	35.08	11.24	32.97	0.00	100	236	PEAK	3	5719.04	71.32	110.63	-39.31	57.82	35.15	11.30	32.95	0.00	100	236	PEAK	4	5720.13	70.95	111.19	-40.24	57.45	35.15	11.30	32.95	0.00	100	236	PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>105.61</td> <td>-----</td> <td>-----</td> <td>92.01</td> <td>35.20</td> <td>11.34</td> <td>32.94</td> <td>0.00</td> <td>100</td> <td>236</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Peak	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5755.00	105.61	-----	-----	92.01	35.20	11.34	32.94	0.00	100	236	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Peak	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5647.12	54.69	68.30	-13.61	41.37	35.07	11.23	32.98	0.00	100	236	PEAK																																																																																																																					
2	5650.07	53.23	68.35	-15.12	39.88	35.08	11.24	32.97	0.00	100	236	PEAK																																																																																																																					
3	5719.04	71.32	110.63	-39.31	57.82	35.15	11.30	32.95	0.00	100	236	PEAK																																																																																																																					
4	5720.13	70.95	111.19	-40.24	57.45	35.15	11.30	32.95	0.00	100	236	PEAK																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Peak	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5755.00	105.61	-----	-----	92.01	35.20	11.34	32.94	0.00	100	236	PEAK																																																																																																																					
Avg	Blank	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Avg</th> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>96.71</td> <td>-----</td> <td>-----</td> <td>83.11</td> <td>35.20</td> <td>11.34</td> <td>32.94</td> <td>0.00</td> <td>100</td> <td>236</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Avg	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5755.00	96.71	-----	-----	83.11	35.20	11.34	32.94	0.00	100	236	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Avg	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5755.00	96.71	-----	-----	83.11	35.20	11.34	32.94	0.00	100	236	AVERAGE																																																																																																																					



Mode	35																																																																																	
	Band Edge - R																																																																																	
	U-NII-3_5.725-5.85_802.11ac VHT40_CH151_5755MHz																																																																																	
ANT	4																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.84</td> <td>52.97</td> <td>111.26</td> <td>-58.29</td> <td>39.19</td> <td>35.32</td> <td>11.43</td> <td>32.97</td> <td>0.00</td> <td>100</td> <td>236</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5874.73</td> <td>53.19</td> <td>105.38</td> <td>-52.19</td> <td>39.38</td> <td>35.35</td> <td>11.44</td> <td>32.98</td> <td>0.00</td> <td>100</td> <td>236</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5920.56</td> <td>55.47</td> <td>71.58</td> <td>-16.11</td> <td>41.61</td> <td>35.40</td> <td>11.47</td> <td>33.01</td> <td>0.00</td> <td>100</td> <td>236</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5939.86</td> <td>53.57</td> <td>68.30</td> <td>-14.73</td> <td>39.68</td> <td>35.43</td> <td>11.48</td> <td>33.02</td> <td>0.00</td> <td>100</td> <td>236</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.84	52.97	111.26	-58.29	39.19	35.32	11.43	32.97	0.00	100	236	PEAK	2	5874.73	53.19	105.38	-52.19	39.38	35.35	11.44	32.98	0.00	100	236	PEAK	3	5920.56	55.47	71.58	-16.11	41.61	35.40	11.47	33.01	0.00	100	236	PEAK	4	5939.86	53.57	68.30	-14.73	39.68	35.43	11.48	33.02	0.00	100	236	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5854.84	52.97	111.26	-58.29	39.19	35.32	11.43	32.97	0.00	100	236	PEAK																																																																						
2	5874.73	53.19	105.38	-52.19	39.38	35.35	11.44	32.98	0.00	100	236	PEAK																																																																						
3	5920.56	55.47	71.58	-16.11	41.61	35.40	11.47	33.01	0.00	100	236	PEAK																																																																						
4	5939.86	53.57	68.30	-14.73	39.68	35.43	11.48	33.02	0.00	100	236	PEAK																																																																						





	35																																																																																																																										
Mode	Band Edge - L																																																																																																																										
	U-NII-3_5.725-5.85_802.11ac VHT40_CH151_5755MHz																																																																																																																										
ANT	4																																																																																																																										
Pol.	Vertical	Fundamental																																																																																																																									
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5634.26</td> <td>54.42</td> <td>68.30</td> <td>-13.88</td> <td>41.12</td> <td>35.06</td> <td>11.22</td> <td>32.98</td> <td>0.00</td> <td>108</td> <td>17</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.53</td> <td>52.14</td> <td>68.69</td> <td>-16.55</td> <td>38.79</td> <td>35.08</td> <td>11.24</td> <td>32.97</td> <td>0.00</td> <td>108</td> <td>17</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5718.58</td> <td>69.78</td> <td>118.50</td> <td>-40.72</td> <td>56.28</td> <td>35.15</td> <td>11.30</td> <td>32.95</td> <td>0.00</td> <td>108</td> <td>17</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5728.28</td> <td>66.43</td> <td>111.54</td> <td>-45.11</td> <td>52.93</td> <td>35.15</td> <td>11.30</td> <td>32.95</td> <td>0.00</td> <td>108</td> <td>17</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5634.26	54.42	68.30	-13.88	41.12	35.06	11.22	32.98	0.00	108	17	PEAK	2	5650.53	52.14	68.69	-16.55	38.79	35.08	11.24	32.97	0.00	108	17	PEAK	3	5718.58	69.78	118.50	-40.72	56.28	35.15	11.30	32.95	0.00	108	17	PEAK	4	5728.28	66.43	111.54	-45.11	52.93	35.15	11.30	32.95	0.00	108	17	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>101.23</td> <td>-----</td> <td>-----</td> <td>87.63</td> <td>35.20</td> <td>11.34</td> <td>32.94</td> <td>0.00</td> <td>108</td> <td>17</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5755.00	101.23	-----	-----	87.63	35.20	11.34	32.94	0.00	108	17	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5634.26	54.42	68.30	-13.88	41.12	35.06	11.22	32.98	0.00	108	17	PEAK																																																																																																															
2	5650.53	52.14	68.69	-16.55	38.79	35.08	11.24	32.97	0.00	108	17	PEAK																																																																																																															
3	5718.58	69.78	118.50	-40.72	56.28	35.15	11.30	32.95	0.00	108	17	PEAK																																																																																																															
4	5728.28	66.43	111.54	-45.11	52.93	35.15	11.30	32.95	0.00	108	17	PEAK																																																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5755.00	101.23	-----	-----	87.63	35.20	11.34	32.94	0.00	108	17	PEAK																																																																																																															
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>92.35</td> <td>-----</td> <td>-----</td> <td>78.75</td> <td>35.20</td> <td>11.34</td> <td>32.94</td> <td>0.00</td> <td>108</td> <td>17</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5755.00	92.35	-----	-----	78.75	35.20	11.34	32.94	0.00	108	17	AVERAGE																																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5755.00	92.35	-----	-----	78.75	35.20	11.34	32.94	0.00	108	17	AVERAGE																																																																																																															



Mode	35																																																																																
	Band Edge - R																																																																																
	U-NII-3_5.725-5.85_802.11ac VHT40_CH151_5755MHz																																																																																
ANT	4																																																																																
Pol.	Vertical	Fundamental																																																																															
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.45</td> <td>52.65</td> <td>112.15</td> <td>-59.50</td> <td>38.87</td> <td>35.32</td> <td>11.43</td> <td>32.97</td> <td>0.00</td> <td>108</td> <td>17 PEAK</td> </tr> <tr> <td>2</td> <td>5867.13</td> <td>55.45</td> <td>107.50</td> <td>-52.05</td> <td>41.65</td> <td>35.34</td> <td>11.44</td> <td>32.98</td> <td>0.00</td> <td>108</td> <td>17 PEAK</td> </tr> <tr> <td>3</td> <td>5924.46</td> <td>52.81</td> <td>68.70</td> <td>-15.89</td> <td>38.94</td> <td>35.41</td> <td>11.47</td> <td>33.01</td> <td>0.00</td> <td>108</td> <td>17 PEAK</td> </tr> <tr> <td>4</td> <td>5926.80</td> <td>54.13</td> <td>68.30</td> <td>-14.17</td> <td>40.26</td> <td>35.41</td> <td>11.48</td> <td>33.02</td> <td>0.00</td> <td>108</td> <td>17 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.45	52.65	112.15	-59.50	38.87	35.32	11.43	32.97	0.00	108	17 PEAK	2	5867.13	55.45	107.50	-52.05	41.65	35.34	11.44	32.98	0.00	108	17 PEAK	3	5924.46	52.81	68.70	-15.89	38.94	35.41	11.47	33.01	0.00	108	17 PEAK	4	5926.80	54.13	68.30	-14.17	40.26	35.41	11.48	33.02	0.00	108	17 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5854.45	52.65	112.15	-59.50	38.87	35.32	11.43	32.97	0.00	108	17 PEAK																																																																						
2	5867.13	55.45	107.50	-52.05	41.65	35.34	11.44	32.98	0.00	108	17 PEAK																																																																						
3	5924.46	52.81	68.70	-15.89	38.94	35.41	11.47	33.01	0.00	108	17 PEAK																																																																						
4	5926.80	54.13	68.30	-14.17	40.26	35.41	11.48	33.02	0.00	108	17 PEAK																																																																						

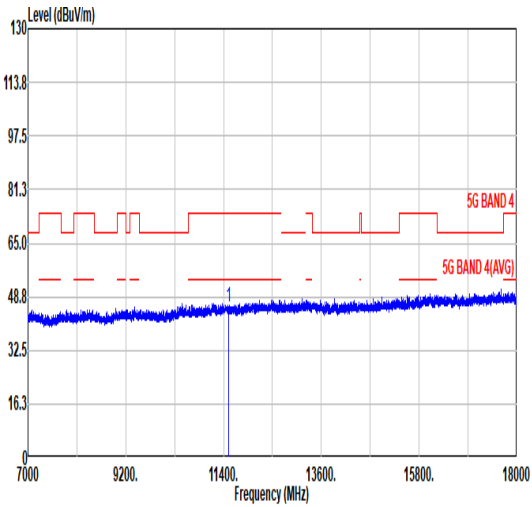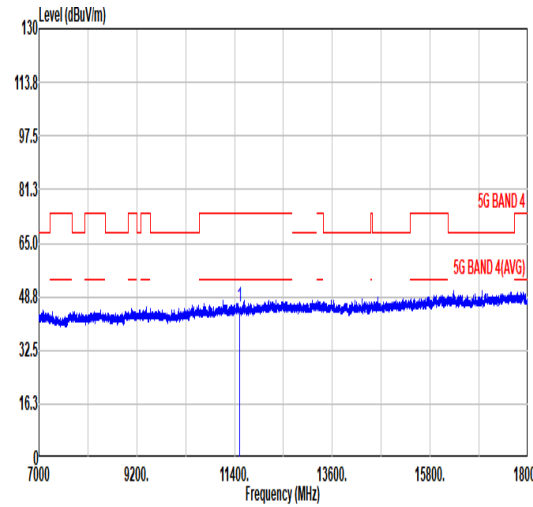

	35																																																																													
Mode	Harmonic																																																																													
	U-NII-3_5.725-5.85_802.11ac VHT40_CH151_5755MHz																																																																													
ANT	4																																																																													
Pol.	Horizontal	Vertical																																																																												
Peak	 <p>Level (dBuV/m)</p> <p>130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0</p> <p>7000 9200. 11400. 13600. 15800. 18000</p> <p>Frequency (MHz)</p> <p>5G BAND 4</p> <p>5G BAND 4(AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11510.00</td> <td>45.70</td> <td>74.00</td> <td>-28.30</td> <td>56.13</td> <td>38.86</td> <td>16.15</td> <td>65.44</td> <td>0.00</td> <td>300 0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11510.00	45.70	74.00	-28.30	56.13	38.86	16.15	65.44	0.00	300 0 PEAK	 <p>Level (dBuV/m)</p> <p>130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0</p> <p>7000 9200. 11400. 13600. 15800. 18000</p> <p>Frequency (MHz)</p> <p>5G BAND 4</p> <p>5G BAND 4(AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11510.00</td> <td>45.64</td> <td>74.00</td> <td>-28.36</td> <td>56.07</td> <td>38.86</td> <td>16.15</td> <td>65.44</td> <td>0.00</td> <td>100 0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11510.00	45.64	74.00	-28.36	56.07	38.86	16.15	65.44	0.00	100 0 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 11510.00	45.70	74.00	-28.30	56.13	38.86	16.15	65.44	0.00	300 0 PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 11510.00	45.64	74.00	-28.36	56.07	38.86	16.15	65.44	0.00	100 0 PEAK																																																																					
Avg																																																																														






	36																																																																																																																																
Mode	Band Edge - L																																																																																																																																
	U-NII-3_5.725-5.85_802.11ac VHT40_CH159_5795MHz																																																																																																																																
ANT	4																																																																																																																																
Pol.	Horizontal	Fundamental																																																																																																																															
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5611.31</td> <td>53.89</td> <td>68.30</td> <td>-14.41</td> <td>40.65</td> <td>35.03</td> <td>11.20</td> <td>32.99</td> <td>0.00</td> <td>100</td> <td>183</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.90</td> <td>51.74</td> <td>68.97</td> <td>-17.23</td> <td>38.39</td> <td>35.08</td> <td>11.24</td> <td>32.97</td> <td>0.00</td> <td>100</td> <td>183</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5701.99</td> <td>54.82</td> <td>105.86</td> <td>-51.04</td> <td>41.37</td> <td>35.13</td> <td>11.28</td> <td>32.96</td> <td>0.00</td> <td>100</td> <td>183</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.12</td> <td>53.38</td> <td>111.17</td> <td>-57.79</td> <td>39.88</td> <td>35.15</td> <td>11.30</td> <td>32.95</td> <td>0.00</td> <td>100</td> <td>183</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Peak	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5611.31	53.89	68.30	-14.41	40.65	35.03	11.20	32.99	0.00	100	183	PEAK	2	5650.90	51.74	68.97	-17.23	38.39	35.08	11.24	32.97	0.00	100	183	PEAK	3	5701.99	54.82	105.86	-51.04	41.37	35.13	11.28	32.96	0.00	100	183	PEAK	4	5720.12	53.38	111.17	-57.79	39.88	35.15	11.30	32.95	0.00	100	183	PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>104.49</td> <td>-----</td> <td>-----</td> <td>90.78</td> <td>35.25</td> <td>11.39</td> <td>32.93</td> <td>0.00</td> <td>100</td> <td>183</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Peak	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	104.49	-----	-----	90.78	35.25	11.39	32.93	0.00	100	183	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Peak	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5611.31	53.89	68.30	-14.41	40.65	35.03	11.20	32.99	0.00	100	183	PEAK																																																																																																																					
2	5650.90	51.74	68.97	-17.23	38.39	35.08	11.24	32.97	0.00	100	183	PEAK																																																																																																																					
3	5701.99	54.82	105.86	-51.04	41.37	35.13	11.28	32.96	0.00	100	183	PEAK																																																																																																																					
4	5720.12	53.38	111.17	-57.79	39.88	35.15	11.30	32.95	0.00	100	183	PEAK																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Peak	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5795.00	104.49	-----	-----	90.78	35.25	11.39	32.93	0.00	100	183	PEAK																																																																																																																					
Avg	Blank	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Avg</th> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>97.01</td> <td>-----</td> <td>-----</td> <td>83.32</td> <td>35.24</td> <td>11.38</td> <td>32.93</td> <td>0.00</td> <td>100</td> <td>183</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Avg	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	97.01	-----	-----	83.32	35.24	11.38	32.93	0.00	100	183	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Avg	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5795.00	97.01	-----	-----	83.32	35.24	11.38	32.93	0.00	100	183	AVERAGE																																																																																																																					



	36																																																																								
Mode	Band Edge - R																																																																								
	U-NII-3_5.725-5.85_802.11ac VHT40_CH159_5795MHz																																																																								
ANT	4																																																																								
Pol.	Horizontal	Fundamental																																																																							
Peak																																																																									
	<table border="1"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.21</td> <td>60.63</td> <td>112.70</td> <td>-52.07</td> <td>46.85</td> <td>35.32</td> <td>11.43</td> <td>32.97</td> <td>0.00</td> <td>100</td> <td>183 PEAK</td> </tr> <tr> <td>2</td> <td>5857.62</td> <td>61.04</td> <td>110.17</td> <td>-49.13</td> <td>47.26</td> <td>35.32</td> <td>11.43</td> <td>32.97</td> <td>0.00</td> <td>100</td> <td>183 PEAK</td> </tr> <tr> <td>3</td> <td>5923.03</td> <td>53.07</td> <td>69.75</td> <td>-16.68</td> <td>39.20</td> <td>35.41</td> <td>11.47</td> <td>33.01</td> <td>0.00</td> <td>100</td> <td>183 PEAK</td> </tr> <tr> <td>4</td> <td>5925.36</td> <td>54.34</td> <td>68.30</td> <td>-13.96</td> <td>40.47</td> <td>35.41</td> <td>11.48</td> <td>33.02</td> <td>0.00</td> <td>100</td> <td>183 PEAK</td> </tr> </tbody> </table>			Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	Aux Loss	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5854.21	60.63	112.70	-52.07	46.85	35.32	11.43	32.97	0.00	100	183 PEAK	2	5857.62	61.04	110.17	-49.13	47.26	35.32	11.43	32.97	0.00	100	183 PEAK	3	5923.03	53.07	69.75	-16.68	39.20	35.41	11.47	33.01	0.00	100	183 PEAK	4	5925.36	54.34	68.30	-13.96	40.47	35.41	11.48	33.02	0.00	100
	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	Aux Loss	APos	TPos	Remark																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																															
1	5854.21	60.63	112.70	-52.07	46.85	35.32	11.43	32.97	0.00	100	183 PEAK																																																														
2	5857.62	61.04	110.17	-49.13	47.26	35.32	11.43	32.97	0.00	100	183 PEAK																																																														
3	5923.03	53.07	69.75	-16.68	39.20	35.41	11.47	33.01	0.00	100	183 PEAK																																																														
4	5925.36	54.34	68.30	-13.96	40.47	35.41	11.48	33.02	0.00	100	183 PEAK																																																														

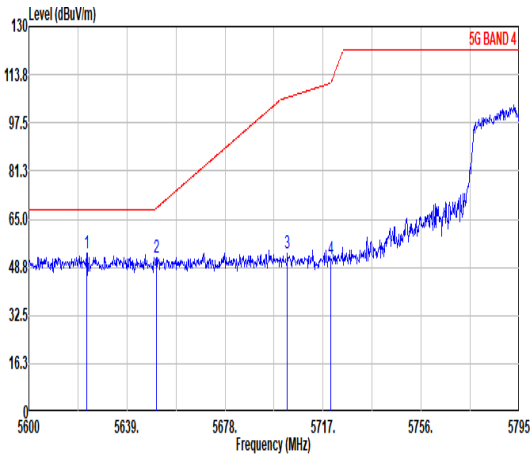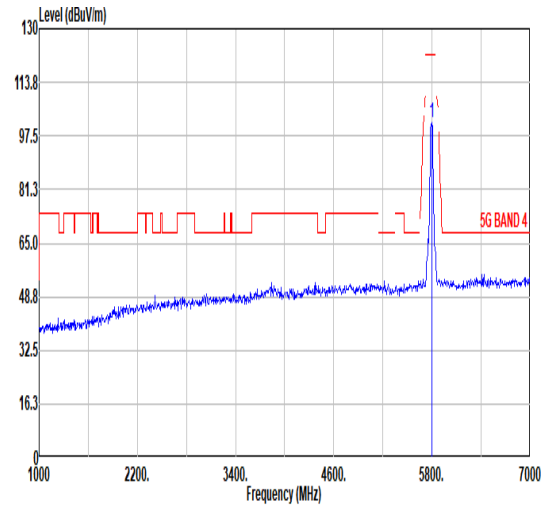
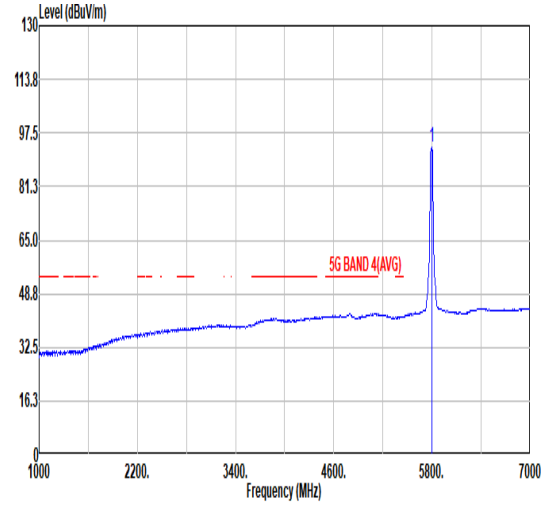


	36																																																																																																																																
Mode	Band Edge - L																																																																																																																																
	U-NII-3_5.725-5.85_802.11ac VHT40_CH159_5795MHz																																																																																																																																
ANT	4																																																																																																																																
Pol.	Vertical	Fundamental																																																																																																																															
Peak	 <table border="1" data-bbox="279 1064 813 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5623.01</td> <td>53.37</td> <td>68.30</td> <td>-14.93</td> <td>40.09</td> <td>35.05</td> <td>11.21</td> <td>32.98</td> <td>0.00</td> <td>105</td> <td>19</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.70</td> <td>51.97</td> <td>68.82</td> <td>-16.85</td> <td>38.62</td> <td>35.08</td> <td>11.24</td> <td>32.97</td> <td>0.00</td> <td>105</td> <td>19</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5702.77</td> <td>53.31</td> <td>106.08</td> <td>-52.77</td> <td>39.86</td> <td>35.13</td> <td>11.28</td> <td>32.96</td> <td>0.00</td> <td>105</td> <td>19</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.12</td> <td>51.62</td> <td>111.17</td> <td>-59.55</td> <td>38.12</td> <td>35.15</td> <td>11.30</td> <td>32.95</td> <td>0.00</td> <td>105</td> <td>19</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Peak	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5623.01	53.37	68.30	-14.93	40.09	35.05	11.21	32.98	0.00	105	19	PEAK	2	5650.70	51.97	68.82	-16.85	38.62	35.08	11.24	32.97	0.00	105	19	PEAK	3	5702.77	53.31	106.08	-52.77	39.86	35.13	11.28	32.96	0.00	105	19	PEAK	4	5720.12	51.62	111.17	-59.55	38.12	35.15	11.30	32.95	0.00	105	19	PEAK	 <table border="1" data-bbox="877 1108 1420 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>101.71</td> <td>-----</td> <td>-----</td> <td>88.02</td> <td>35.24</td> <td>11.38</td> <td>32.93</td> <td>0.00</td> <td>105</td> <td>19</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	101.71	-----	-----	88.02	35.24	11.38	32.93	0.00	105	19	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Peak	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5623.01	53.37	68.30	-14.93	40.09	35.05	11.21	32.98	0.00	105	19	PEAK																																																																																																																					
2	5650.70	51.97	68.82	-16.85	38.62	35.08	11.24	32.97	0.00	105	19	PEAK																																																																																																																					
3	5702.77	53.31	106.08	-52.77	39.86	35.13	11.28	32.96	0.00	105	19	PEAK																																																																																																																					
4	5720.12	51.62	111.17	-59.55	38.12	35.15	11.30	32.95	0.00	105	19	PEAK																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5795.00	101.71	-----	-----	88.02	35.24	11.38	32.93	0.00	105	19	PEAK																																																																																																																					
Avg	Blank	 <table border="1" data-bbox="877 1792 1420 1915"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>93.45</td> <td>-----</td> <td>-----</td> <td>79.76</td> <td>35.24</td> <td>11.38</td> <td>32.93</td> <td>0.00</td> <td>105</td> <td>19</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	93.45	-----	-----	79.76	35.24	11.38	32.93	0.00	105	19	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5795.00	93.45	-----	-----	79.76	35.24	11.38	32.93	0.00	105	19	AVERAGE																																																																																																																					






Mode	36																																																																			
	Band Edge - R																																																																			
	U-NII-3_5.725-5.85_802.11ac VHT40_CH159_5795MHz																																																																			
ANT	4																																																																			
Pol.	Vertical	Fundamental																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Factor</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5852.51</td> <td>59.76</td> <td>116.59</td> <td>-56.83</td> <td>45.98</td> <td>35.32</td> <td>11.43</td> <td>32.97</td> <td>0.00</td> <td>105</td> <td>19 PEAK</td> </tr> <tr> <td>2 5872.97</td> <td>53.93</td> <td>105.87</td> <td>-51.94</td> <td>40.13</td> <td>35.34</td> <td>11.44</td> <td>32.98</td> <td>0.00</td> <td>105</td> <td>19 PEAK</td> </tr> <tr> <td>3 5924.89</td> <td>51.32</td> <td>68.38</td> <td>-17.06</td> <td>37.45</td> <td>35.41</td> <td>11.47</td> <td>33.01</td> <td>0.00</td> <td>105</td> <td>19 PEAK</td> </tr> <tr> <td>4 5930.16</td> <td>54.10</td> <td>68.30</td> <td>-14.20</td> <td>40.22</td> <td>35.42</td> <td>11.48</td> <td>33.02</td> <td>0.00</td> <td>105</td> <td>19 PEAK</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Factor	Preamp Loss	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5852.51	59.76	116.59	-56.83	45.98	35.32	11.43	32.97	0.00	105	19 PEAK	2 5872.97	53.93	105.87	-51.94	40.13	35.34	11.44	32.98	0.00	105	19 PEAK	3 5924.89	51.32	68.38	-17.06	37.45	35.41	11.47	33.01	0.00	105	19 PEAK	4 5930.16	54.10	68.30	-14.20	40.22	35.42	11.48	33.02	0.00	105	19 PEAK	Blank
Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Factor	Preamp Loss	Aux Factor	APos	TPos	Remark																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1 5852.51	59.76	116.59	-56.83	45.98	35.32	11.43	32.97	0.00	105	19 PEAK																																																										
2 5872.97	53.93	105.87	-51.94	40.13	35.34	11.44	32.98	0.00	105	19 PEAK																																																										
3 5924.89	51.32	68.38	-17.06	37.45	35.41	11.47	33.01	0.00	105	19 PEAK																																																										
4 5930.16	54.10	68.30	-14.20	40.22	35.42	11.48	33.02	0.00	105	19 PEAK																																																										

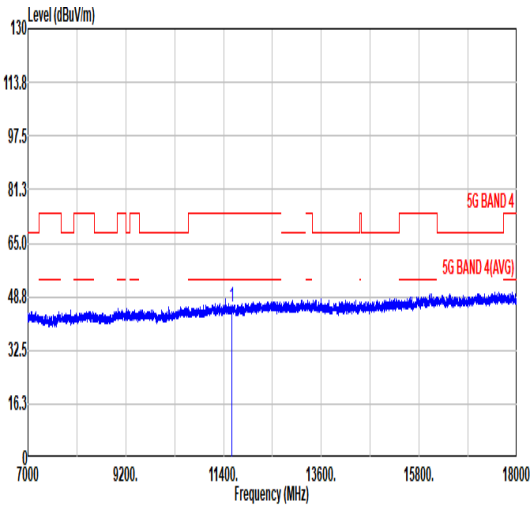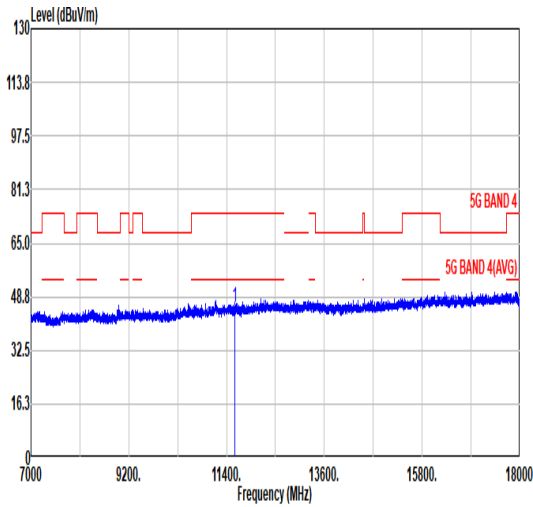

	36																																																																																	
Mode	Harmonic																																																																																	
	U-NII-3_5.725-5.85_802.11ac VHT40_CH159_5795MHz																																																																																	
ANT	4																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a red line for '5G BAND 4' and a blue line for '5G BAND 4(AVG)'. A vertical blue line is drawn at 11590.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11590.00</td> <td>45.69</td> <td>74.00</td> <td>-28.31</td> <td>55.99</td> <td>38.91</td> <td>16.19</td> <td>65.40</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11590.00	45.69	74.00	-28.31	55.99	38.91	16.19	65.40	0.00	300	0	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows a red line for '5G BAND 4' and a blue line for '5G BAND 4(AVG)'. A vertical blue line is drawn at 11590.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11590.00</td> <td>45.51</td> <td>74.00</td> <td>-28.49</td> <td>55.81</td> <td>38.91</td> <td>16.19</td> <td>65.40</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11590.00	45.51	74.00	-28.49	55.81	38.91	16.19	65.40	0.00	100	0	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 11590.00	45.69	74.00	-28.31	55.99	38.91	16.19	65.40	0.00	300	0	PEAK																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 11590.00	45.51	74.00	-28.49	55.81	38.91	16.19	65.40	0.00	100	0	PEAK																																																																							
Avg																																																																																		

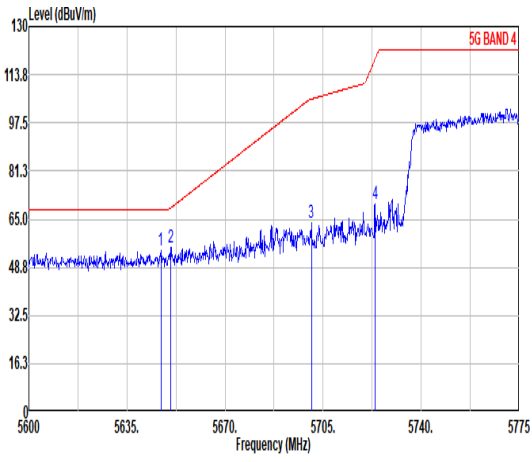
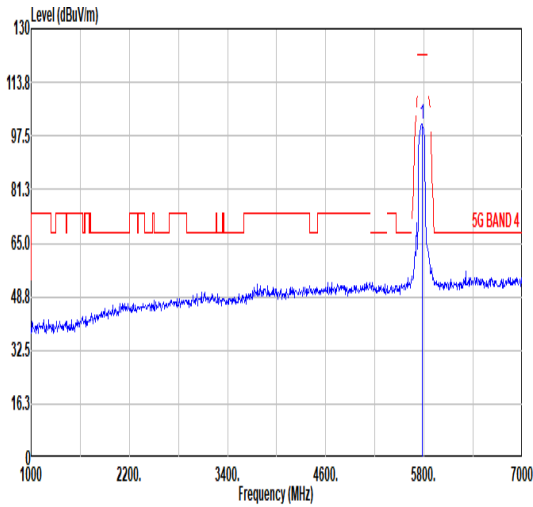
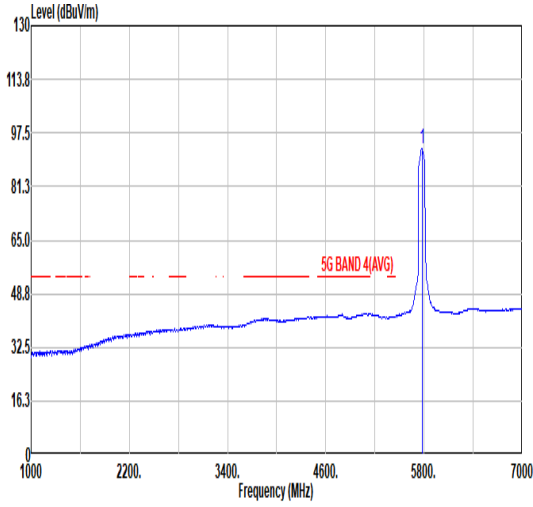


	37																																																																																																																														
Mode	Band Edge - L																																																																																																																														
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																																														
ANT	4																																																																																																																														
Pol.	Horizontal	Fundamental																																																																																																																													
Peak	 <table border="1" data-bbox="279 1064 813 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5647.08</td> <td>54.59</td> <td>68.30</td> <td>-13.71</td> <td>41.27</td> <td>35.07</td> <td>11.23</td> <td>32.98</td> <td>0.00</td> <td>185</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.58</td> <td>55.23</td> <td>68.73</td> <td>-13.50</td> <td>41.88</td> <td>35.08</td> <td>11.24</td> <td>32.97</td> <td>0.00</td> <td>185</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5700.80</td> <td>63.85</td> <td>105.52</td> <td>-41.67</td> <td>50.40</td> <td>35.13</td> <td>11.28</td> <td>32.96</td> <td>0.00</td> <td>100</td> <td>185</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5723.55</td> <td>70.28</td> <td>118.99</td> <td>-48.71</td> <td>56.76</td> <td>35.16</td> <td>11.31</td> <td>32.95</td> <td>0.00</td> <td>100</td> <td>185</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Peak	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5647.08	54.59	68.30	-13.71	41.27	35.07	11.23	32.98	0.00	185	PEAK	2	5650.58	55.23	68.73	-13.50	41.88	35.08	11.24	32.97	0.00	185	PEAK	3	5700.80	63.85	105.52	-41.67	50.40	35.13	11.28	32.96	0.00	100	185	PEAK	4	5723.55	70.28	118.99	-48.71	56.76	35.16	11.31	32.95	0.00	100	185	PEAK	 <table border="1" data-bbox="885 1108 1420 1243"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>100.87</td> <td>-----</td> <td>-----</td> <td>87.23</td> <td>35.22</td> <td>11.36</td> <td>32.94</td> <td>0.00</td> <td>100</td> <td>185</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Peak	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	100.87	-----	-----	87.23	35.22	11.36	32.94	0.00	100	185	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																						
Peak	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																					
1	5647.08	54.59	68.30	-13.71	41.27	35.07	11.23	32.98	0.00	185	PEAK																																																																																																																				
2	5650.58	55.23	68.73	-13.50	41.88	35.08	11.24	32.97	0.00	185	PEAK																																																																																																																				
3	5700.80	63.85	105.52	-41.67	50.40	35.13	11.28	32.96	0.00	100	185	PEAK																																																																																																																			
4	5723.55	70.28	118.99	-48.71	56.76	35.16	11.31	32.95	0.00	100	185	PEAK																																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																						
Peak	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																					
1	5775.00	100.87	-----	-----	87.23	35.22	11.36	32.94	0.00	100	185	PEAK																																																																																																																			
Avg	Blank	 <table border="1" data-bbox="885 1792 1420 1915"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Avg</th> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>92.73</td> <td>-----</td> <td>-----</td> <td>79.09</td> <td>35.22</td> <td>11.36</td> <td>32.94</td> <td>0.00</td> <td>100</td> <td>185</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Avg	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	92.73	-----	-----	79.09	35.22	11.36	32.94	0.00	100	185	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																						
Avg	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																					
1	5775.00	92.73	-----	-----	79.09	35.22	11.36	32.94	0.00	100	185	AVERAGE																																																																																																																			



	37																																																																									
Mode	Band Edge - R																																																																									
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																									
ANT	4																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.63</td> <td>61.33</td> <td>111.75</td> <td>-50.42</td> <td>47.55</td> <td>35.32</td> <td>11.43</td> <td>32.97</td> <td>0.00</td> <td>100</td> <td>185</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5860.40</td> <td>64.02</td> <td>109.39</td> <td>-45.37</td> <td>50.23</td> <td>35.33</td> <td>11.43</td> <td>32.97</td> <td>0.00</td> <td>100</td> <td>185</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.80</td> <td>52.41</td> <td>68.45</td> <td>-16.04</td> <td>38.54</td> <td>35.41</td> <td>11.47</td> <td>33.01</td> <td>0.00</td> <td>100</td> <td>185</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5929.00</td> <td>54.39</td> <td>68.30</td> <td>-13.91</td> <td>40.52</td> <td>35.41</td> <td>11.48</td> <td>33.02</td> <td>0.00</td> <td>100</td> <td>185</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Peak	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	cm	deg	1	5854.63	61.33	111.75	-50.42	47.55	35.32	11.43	32.97	0.00	100	185	PEAK	2	5860.40	64.02	109.39	-45.37	50.23	35.33	11.43	32.97	0.00	100	185	PEAK	3	5924.80	52.41	68.45	-16.04	38.54	35.41	11.47	33.01	0.00	100	185	PEAK	4	5929.00	54.39	68.30	-13.91	40.52	35.41	11.48	33.02	0.00	100	185	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																		
Peak	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	cm	deg																																																																	
1	5854.63	61.33	111.75	-50.42	47.55	35.32	11.43	32.97	0.00	100	185	PEAK																																																														
2	5860.40	64.02	109.39	-45.37	50.23	35.33	11.43	32.97	0.00	100	185	PEAK																																																														
3	5924.80	52.41	68.45	-16.04	38.54	35.41	11.47	33.01	0.00	100	185	PEAK																																																														
4	5929.00	54.39	68.30	-13.91	40.52	35.41	11.48	33.02	0.00	100	185	PEAK																																																														

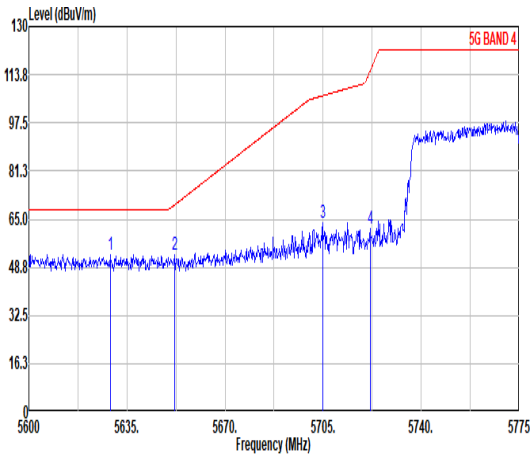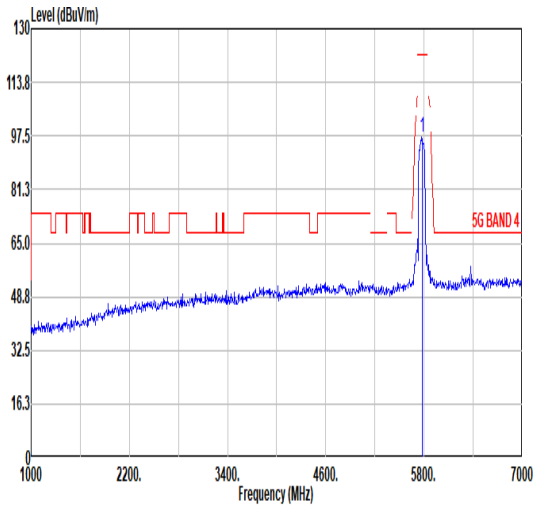
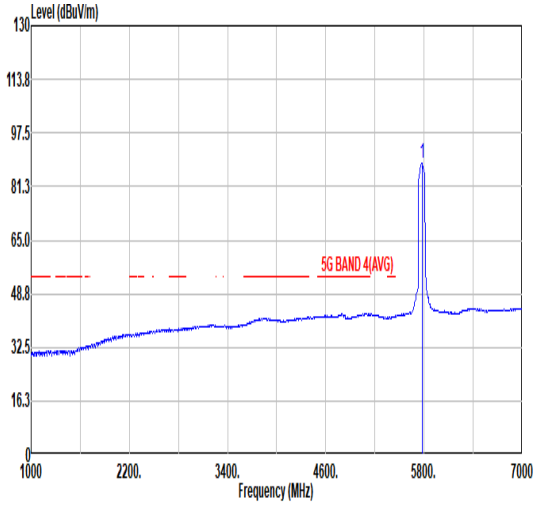


	37																																																																																																													
Mode	Band Edge - L																																																																																																													
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																													
ANT	4																																																																																																													
Pol.	Vertical	Fundamental																																																																																																												
Peak	 <table border="1" data-bbox="279 1064 813 1243"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5629.05</td> <td>53.21</td> <td>68.30</td> <td>-15.09</td> <td>39.92</td> <td>35.05</td> <td>11.22</td> <td>32.98</td> <td>0.00</td> <td>100</td> <td>16 PEAK</td> </tr> <tr> <td>2</td> <td>5652.15</td> <td>52.74</td> <td>69.90</td> <td>-17.16</td> <td>39.39</td> <td>35.08</td> <td>11.24</td> <td>32.97</td> <td>0.00</td> <td>100</td> <td>16 PEAK</td> </tr> <tr> <td>3</td> <td>5704.83</td> <td>63.95</td> <td>106.65</td> <td>-42.70</td> <td>50.48</td> <td>35.14</td> <td>11.29</td> <td>32.96</td> <td>0.00</td> <td>100</td> <td>16 PEAK</td> </tr> <tr> <td>4</td> <td>5721.80</td> <td>61.63</td> <td>115.00</td> <td>-53.37</td> <td>48.12</td> <td>35.16</td> <td>11.30</td> <td>32.95</td> <td>0.00</td> <td>100</td> <td>16 PEAK</td> </tr> </tbody> </table>		Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5629.05	53.21	68.30	-15.09	39.92	35.05	11.22	32.98	0.00	100	16 PEAK	2	5652.15	52.74	69.90	-17.16	39.39	35.08	11.24	32.97	0.00	100	16 PEAK	3	5704.83	63.95	106.65	-42.70	50.48	35.14	11.29	32.96	0.00	100	16 PEAK	4	5721.80	61.63	115.00	-53.37	48.12	35.16	11.30	32.95	0.00	100	16 PEAK	 <table border="1" data-bbox="885 1108 1420 1243"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>97.04</td> <td>-----</td> <td>-----</td> <td>83.41</td> <td>35.21</td> <td>11.36</td> <td>32.94</td> <td>0.00</td> <td>100</td> <td>16 PEAK</td> </tr> </tbody> </table>		Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5775.00	97.04	-----	-----	83.41	35.21	11.36	32.94	0.00	100	16 PEAK
	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																			
1	5629.05	53.21	68.30	-15.09	39.92	35.05	11.22	32.98	0.00	100	16 PEAK																																																																																																			
2	5652.15	52.74	69.90	-17.16	39.39	35.08	11.24	32.97	0.00	100	16 PEAK																																																																																																			
3	5704.83	63.95	106.65	-42.70	50.48	35.14	11.29	32.96	0.00	100	16 PEAK																																																																																																			
4	5721.80	61.63	115.00	-53.37	48.12	35.16	11.30	32.95	0.00	100	16 PEAK																																																																																																			
	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																			
1	5775.00	97.04	-----	-----	83.41	35.21	11.36	32.94	0.00	100	16 PEAK																																																																																																			
Avg	Blank	 <table border="1" data-bbox="885 1792 1420 1915"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>88.53</td> <td>-----</td> <td>-----</td> <td>74.90</td> <td>35.21</td> <td>11.36</td> <td>32.94</td> <td>0.00</td> <td>100</td> <td>16 AVERAGE</td> </tr> </tbody> </table>		Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5775.00	88.53	-----	-----	74.90	35.21	11.36	32.94	0.00	100	16 AVERAGE																																																																								
	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																			
1	5775.00	88.53	-----	-----	74.90	35.21	11.36	32.94	0.00	100	16 AVERAGE																																																																																																			



	37																																																																																				
Mode	Band Edge - R																																																																																				
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																				
ANT	4																																																																																				
Pol.	Vertical	Fundamental																																																																																			
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5853.93</td> <td>58.49</td> <td>113.35</td> <td>-54.86</td> <td>44.71</td> <td>35.32</td> <td>11.43</td> <td>32.97</td> <td>0.00</td> <td>100</td> <td>16</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5856.20</td> <td>60.99</td> <td>110.56</td> <td>-49.57</td> <td>47.21</td> <td>35.32</td> <td>11.43</td> <td>32.97</td> <td>0.00</td> <td>100</td> <td>16</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5923.75</td> <td>53.39</td> <td>69.22</td> <td>-15.83</td> <td>39.52</td> <td>35.41</td> <td>11.47</td> <td>33.01</td> <td>0.00</td> <td>100</td> <td>16</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5929.53</td> <td>53.84</td> <td>68.30</td> <td>-14.46</td> <td>39.96</td> <td>35.42</td> <td>11.48</td> <td>33.02</td> <td>0.00</td> <td>100</td> <td>16</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Peak	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5853.93	58.49	113.35	-54.86	44.71	35.32	11.43	32.97	0.00	100	16	PEAK	2	5856.20	60.99	110.56	-49.57	47.21	35.32	11.43	32.97	0.00	100	16	PEAK	3	5923.75	53.39	69.22	-15.83	39.52	35.41	11.47	33.01	0.00	100	16	PEAK	4	5929.53	53.84	68.30	-14.46	39.96	35.42	11.48	33.02	0.00	100	16	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Peak	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5853.93	58.49	113.35	-54.86	44.71	35.32	11.43	32.97	0.00	100	16	PEAK																																																																									
2	5856.20	60.99	110.56	-49.57	47.21	35.32	11.43	32.97	0.00	100	16	PEAK																																																																									
3	5923.75	53.39	69.22	-15.83	39.52	35.41	11.47	33.01	0.00	100	16	PEAK																																																																									
4	5929.53	53.84	68.30	-14.46	39.96	35.42	11.48	33.02	0.00	100	16	PEAK																																																																									

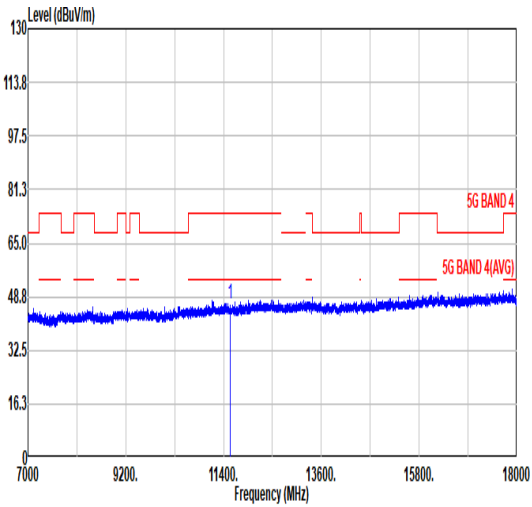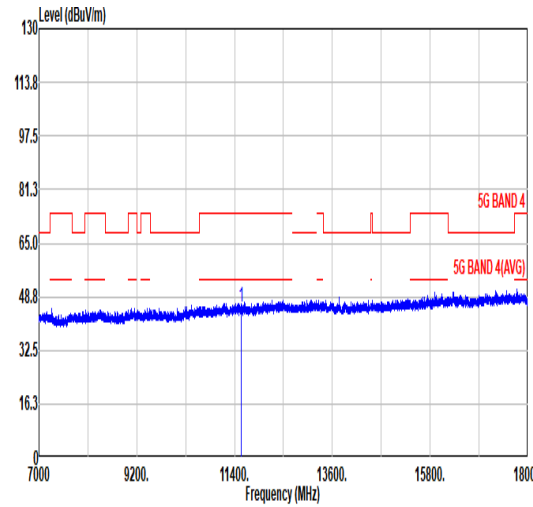

	37																																																																																	
Mode	Harmonic																																																																																	
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																	
ANT	4																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a red stepped line for '5G BAND 4' and a blue line for '5G BAND 4(AVG)'. A vertical blue line is at 11400 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11550.00</td> <td>46.60</td> <td>74.00</td> <td>-27.40</td> <td>56.96</td> <td>38.89</td> <td>16.17</td> <td>65.42</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11550.00	46.60	74.00	-27.40	56.96	38.89	16.17	65.42	0.00	300	0	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows a red stepped line for '5G BAND 4' and a blue line for '5G BAND 4(AVG)'. A vertical blue line is at 11400 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11550.00</td> <td>45.65</td> <td>74.00</td> <td>-28.35</td> <td>56.01</td> <td>38.89</td> <td>16.17</td> <td>65.42</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11550.00	45.65	74.00	-28.35	56.01	38.89	16.17	65.42	0.00	100	0	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 11550.00	46.60	74.00	-27.40	56.96	38.89	16.17	65.42	0.00	300	0	PEAK																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 11550.00	45.65	74.00	-28.35	56.01	38.89	16.17	65.42	0.00	100	0	PEAK																																																																							
Avg																																																																																		



Mode	43																																																																																																																																																																									
	LF																																																																																																																																																																									
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																																																																																																									
ANT	4																																																																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																																																																								
Peak Avg	<p>Data: 10</p> <p>Site : 03CH08-KS Condition : 5G BAND 4 3m CBL 6111D 49922 HORIZONTAL Project : 15E mode : 5g 4 IMEI : : WIFI</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Over (dB)</th> <th>Limit (dBuV/m)</th> <th>ReadAntenna Level (dBuV)</th> <th>Antenna Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>A/Pos (cm)</th> <th>T/Pos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>35.82</td><td>23.50</td><td>-16.50</td><td>40.00</td><td>32.62</td><td>21.71</td><td>0.57</td><td>31.40</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>86.26</td><td>23.24</td><td>-16.76</td><td>40.00</td><td>39.27</td><td>14.10</td><td>1.27</td><td>31.40</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>163.86</td><td>23.49</td><td>-20.01</td><td>43.50</td><td>37.22</td><td>15.82</td><td>1.85</td><td>31.40</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>237.58</td><td>27.54</td><td>-18.46</td><td>46.00</td><td>39.81</td><td>16.89</td><td>2.24</td><td>31.40</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>306.45</td><td>25.87</td><td>-20.13</td><td>46.00</td><td>35.57</td><td>19.13</td><td>2.57</td><td>31.40</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>755.56</td><td>29.20</td><td>-16.80</td><td>46.00</td><td>28.54</td><td>27.99</td><td>4.00</td><td>31.33</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Over (dB)	Limit (dBuV/m)	ReadAntenna Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	A/Pos (cm)	T/Pos (deg)	Remark	1	35.82	23.50	-16.50	40.00	32.62	21.71	0.57	31.40	---	---	Peak	2	86.26	23.24	-16.76	40.00	39.27	14.10	1.27	31.40	---	---	Peak	3	163.86	23.49	-20.01	43.50	37.22	15.82	1.85	31.40	---	---	Peak	4	237.58	27.54	-18.46	46.00	39.81	16.89	2.24	31.40	---	---	Peak	5	306.45	25.87	-20.13	46.00	35.57	19.13	2.57	31.40	---	---	Peak	6	755.56	29.20	-16.80	46.00	28.54	27.99	4.00	31.33	---	---	Peak	<p>Data: 9</p> <p>Site : 03CH08-KS Condition : 5G BAND 4 3m CBL 6111D 49922 VERTICAL Project : 15E mode : 5g 4 IMEI : : WIFI</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Over (dB)</th> <th>Limit (dBuV/m)</th> <th>ReadAntenna Level (dBuV)</th> <th>Antenna Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>A/Pos (cm)</th> <th>T/Pos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>31.94</td><td>24.76</td><td>-15.24</td><td>40.00</td><td>31.52</td><td>24.12</td><td>0.52</td><td>31.40</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>87.23</td><td>24.31</td><td>-15.69</td><td>40.00</td><td>40.21</td><td>14.22</td><td>1.28</td><td>31.40</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>163.86</td><td>27.36</td><td>-16.14</td><td>43.50</td><td>41.09</td><td>15.82</td><td>1.85</td><td>31.40</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>215.27</td><td>25.08</td><td>-18.42</td><td>43.50</td><td>39.53</td><td>14.81</td><td>2.14</td><td>31.40</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>250.19</td><td>26.36</td><td>-19.64</td><td>46.00</td><td>37.01</td><td>18.45</td><td>2.30</td><td>31.40</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>553.80</td><td>26.87</td><td>-19.13</td><td>46.00</td><td>29.18</td><td>25.72</td><td>3.42</td><td>31.45</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Over (dB)	Limit (dBuV/m)	ReadAntenna Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	A/Pos (cm)	T/Pos (deg)	Remark	1	31.94	24.76	-15.24	40.00	31.52	24.12	0.52	31.40	---	---	Peak	2	87.23	24.31	-15.69	40.00	40.21	14.22	1.28	31.40	---	---	Peak	3	163.86	27.36	-16.14	43.50	41.09	15.82	1.85	31.40	---	---	Peak	4	215.27	25.08	-18.42	43.50	39.53	14.81	2.14	31.40	---	---	Peak	5	250.19	26.36	-19.64	46.00	37.01	18.45	2.30	31.40	---	---	Peak	6	553.80	26.87	-19.13	46.00	29.18	25.72	3.42	31.45	---	---	Peak
	Peak	Freq (MHz)	Level (dBuV/m)	Over (dB)	Limit (dBuV/m)	ReadAntenna Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	A/Pos (cm)	T/Pos (deg)	Remark																																																																																																																																																														
1	35.82	23.50	-16.50	40.00	32.62	21.71	0.57	31.40	---	---	Peak																																																																																																																																																															
2	86.26	23.24	-16.76	40.00	39.27	14.10	1.27	31.40	---	---	Peak																																																																																																																																																															
3	163.86	23.49	-20.01	43.50	37.22	15.82	1.85	31.40	---	---	Peak																																																																																																																																																															
4	237.58	27.54	-18.46	46.00	39.81	16.89	2.24	31.40	---	---	Peak																																																																																																																																																															
5	306.45	25.87	-20.13	46.00	35.57	19.13	2.57	31.40	---	---	Peak																																																																																																																																																															
6	755.56	29.20	-16.80	46.00	28.54	27.99	4.00	31.33	---	---	Peak																																																																																																																																																															
Peak	Freq (MHz)	Level (dBuV/m)	Over (dB)	Limit (dBuV/m)	ReadAntenna Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	A/Pos (cm)	T/Pos (deg)	Remark																																																																																																																																																															
1	31.94	24.76	-15.24	40.00	31.52	24.12	0.52	31.40	---	---	Peak																																																																																																																																																															
2	87.23	24.31	-15.69	40.00	40.21	14.22	1.28	31.40	---	---	Peak																																																																																																																																																															
3	163.86	27.36	-16.14	43.50	41.09	15.82	1.85	31.40	---	---	Peak																																																																																																																																																															
4	215.27	25.08	-18.42	43.50	39.53	14.81	2.14	31.40	---	---	Peak																																																																																																																																																															
5	250.19	26.36	-19.64	46.00	37.01	18.45	2.30	31.40	---	---	Peak																																																																																																																																																															
6	553.80	26.87	-19.13	46.00	29.18	25.72	3.42	31.45	---	---	Peak																																																																																																																																																															



<WLAN+WWAN Co-location mode>

Radiated Spurious Emission Test Mode

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 44	U-NII-2C	5.47-5.725	4	802.11ac VHT40	102	5510	MCS0	-	-
	Part 27F LTE Band 13								

Note: About simultaneous transmission test mode, we choose the worst RSE link mode of WWAN (GSM/WCDMA/LTE and the worst RSE link mode of WLAN (5G) combination test

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
44	802.11ac VHT40	102	5468.81	62.39	68.30	-5.91	H	PEAK	Pass	Band Edge
	802.11ac VHT40	102	11020.00	43.77	74.00	-30.23	V	PEAK	Pass	Harmonic







44																																																																												
Mode	Band Edge - L																																																																											
U-NII-2C_5.47-5.725_802.11ac VHT40_CH102_5510MHz + LTE Band 13																																																																												
ANT	-																																																																											
Pol.	Horizontal																																																																											
Peak	Fundamental																																																																											
<p>Level (dBuV/m) vs Frequency (MHz) plot for Peak Horizontal. The plot shows a blue signal line and a red limit line labeled '5G BAND 1-3'. The signal level rises sharply after 5478 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5438.09</td> <td>58.62</td> <td>74.00</td> <td>-15.38</td> <td>40.58</td> <td>34.52</td> <td>13.12</td> <td>29.60</td> <td>0.00</td> <td>100</td> <td>143</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5468.81</td> <td>62.39</td> <td>68.30</td> <td>-5.91</td> <td>44.29</td> <td>34.53</td> <td>13.20</td> <td>29.63</td> <td>0.00</td> <td>100</td> <td>143</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	1	5438.09	58.62	74.00	-15.38	40.58	34.52	13.12	29.60	0.00	100	143	PEAK	2	5468.81	62.39	68.30	-5.91	44.29	34.53	13.20	29.63	0.00	100	143	PEAK	<p>Level (dBuV/m) vs Frequency (MHz) plot for Peak Fundamental. The plot shows a blue signal line and a red limit line labeled '5G BAND 1-3'. A sharp peak is visible at 5510 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>101.98</td> <td>-----</td> <td>-----</td> <td>83.81</td> <td>34.55</td> <td>13.27</td> <td>29.65</td> <td>0.00</td> <td>100</td> <td>143</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	1	5510.00	101.98	-----	-----	83.81	34.55	13.27	29.65	0.00	100	143	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																				
1	5438.09	58.62	74.00	-15.38	40.58	34.52	13.12	29.60	0.00	100	143	PEAK																																																																
2	5468.81	62.39	68.30	-5.91	44.29	34.53	13.20	29.63	0.00	100	143	PEAK																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																				
1	5510.00	101.98	-----	-----	83.81	34.55	13.27	29.65	0.00	100	143	PEAK																																																																
Avg	Fundamental																																																																											
<p>Level (dBuV/m) vs Frequency (MHz) plot for Avg Horizontal. The plot shows a blue signal line and a red dashed limit line labeled '5G BAND 1-3 (AVG)'. The signal level rises after 5478 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.45</td> <td>47.68</td> <td>54.00</td> <td>-6.32</td> <td>29.60</td> <td>34.53</td> <td>13.17</td> <td>29.62</td> <td>0.00</td> <td>100</td> <td>143</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	1	5459.45	47.68	54.00	-6.32	29.60	34.53	13.17	29.62	0.00	100	143	AVERAGE	<p>Level (dBuV/m) vs Frequency (MHz) plot for Avg Fundamental. The plot shows a blue signal line and a red dashed limit line labeled '5G BAND 1-3 (AVG)'. A sharp peak is visible at 5510 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>93.35</td> <td>-----</td> <td>-----</td> <td>75.18</td> <td>34.55</td> <td>13.27</td> <td>29.65</td> <td>0.00</td> <td>100</td> <td>143</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	1	5510.00	93.35	-----	-----	75.18	34.55	13.27	29.65	0.00	100	143	AVERAGE													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																				
1	5459.45	47.68	54.00	-6.32	29.60	34.53	13.17	29.62	0.00	100	143	AVERAGE																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																				
1	5510.00	93.35	-----	-----	75.18	34.55	13.27	29.65	0.00	100	143	AVERAGE																																																																



	44																																									
Mode	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11ac VHT40_CH102_5510MHz + LTE Band 13																																									
ANT	-																																									
Pol.	Horizontal	Fundamental																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5725.87</td> <td>58.55</td> <td>68.30</td> <td>-9.75</td> <td>39.79</td> <td>34.84</td> <td>13.71</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>143</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5725.87	58.55	68.30	-9.75	39.79	34.84	13.71	29.79	0.00	100	143	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1 5725.87	58.55	68.30	-9.75	39.79	34.84	13.71	29.79	0.00	100	143	PEAK																															

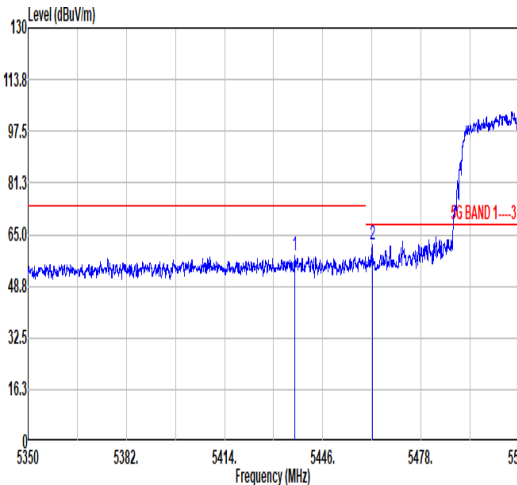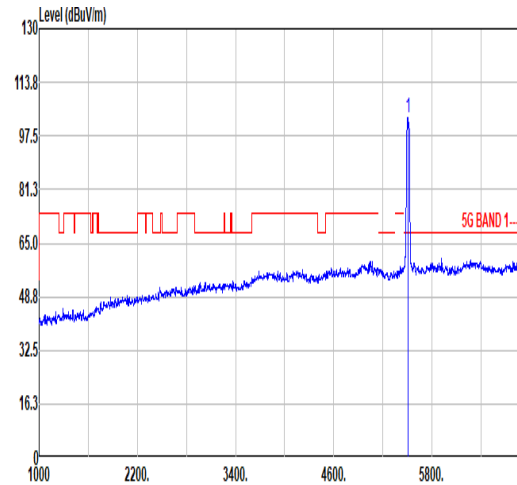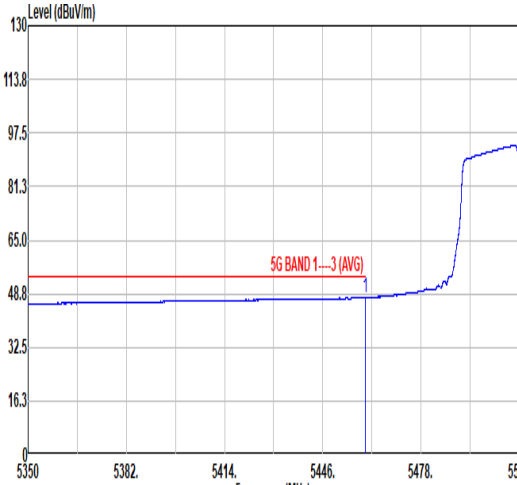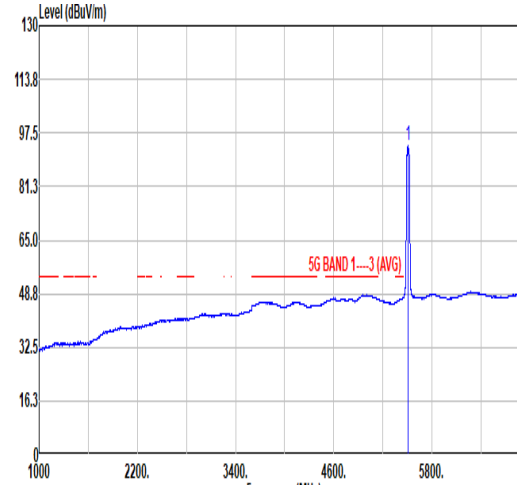

44																																																																												
Mode	Band Edge - L																																																																											
U-NII-2C_5.47-5.725_802.11ac VHT40_CH102_5510MHz + LTE Band 13																																																																												
ANT	-																																																																											
Pol.	Vertical																																																																											
Peak	Fundamental																																																																											
 <table border="1" data-bbox="279 1086 798 1243"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5436.81</td> <td>58.22</td> <td>74.00</td> <td>-15.78</td> <td>40.18</td> <td>34.52</td> <td>13.12</td> <td>29.60</td> <td>0.00</td> <td>100</td> <td>27</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5462.09</td> <td>61.69</td> <td>68.30</td> <td>-6.61</td> <td>43.60</td> <td>34.53</td> <td>13.18</td> <td>29.62</td> <td>0.00</td> <td>100</td> <td>27</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	1	5436.81	58.22	74.00	-15.78	40.18	34.52	13.12	29.60	0.00	100	27	PEAK	2	5462.09	61.69	68.30	-6.61	43.60	34.53	13.18	29.62	0.00	100	27	PEAK	 <table border="1" data-bbox="877 1086 1396 1243"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>103.22</td> <td>-----</td> <td>-----</td> <td>85.05</td> <td>34.55</td> <td>13.27</td> <td>29.65</td> <td>0.00</td> <td>100</td> <td>27</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	1	5510.00	103.22	-----	-----	85.05	34.55	13.27	29.65	0.00	100	27	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																				
1	5436.81	58.22	74.00	-15.78	40.18	34.52	13.12	29.60	0.00	100	27	PEAK																																																																
2	5462.09	61.69	68.30	-6.61	43.60	34.53	13.18	29.62	0.00	100	27	PEAK																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																				
1	5510.00	103.22	-----	-----	85.05	34.55	13.27	29.65	0.00	100	27	PEAK																																																																
Avg	Fundamental																																																																											
 <table border="1" data-bbox="279 1769 798 1926"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.97</td> <td>47.52</td> <td>54.00</td> <td>-6.48</td> <td>29.44</td> <td>34.53</td> <td>13.17</td> <td>29.62</td> <td>0.00</td> <td>100</td> <td>27</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	1	5459.97	47.52	54.00	-6.48	29.44	34.53	13.17	29.62	0.00	100	27	AVERAGE	 <table border="1" data-bbox="877 1769 1396 1926"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>93.46</td> <td>-----</td> <td>-----</td> <td>75.29</td> <td>34.55</td> <td>13.27</td> <td>29.65</td> <td>0.00</td> <td>100</td> <td>27</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg	1	5510.00	93.46	-----	-----	75.29	34.55	13.27	29.65	0.00	100	27	AVERAGE													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																				
1	5459.97	47.52	54.00	-6.48	29.44	34.53	13.17	29.62	0.00	100	27	AVERAGE																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	cm	deg																																																																				
1	5510.00	93.46	-----	-----	75.29	34.55	13.27	29.65	0.00	100	27	AVERAGE																																																																



Mode	44																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11ac VHT40_CH102_5510MHz + LTE Band 13																																									
ANT	-																																									
Pol.	Vertical	Fundamental																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5747.80</td> <td>57.89</td> <td>68.30</td> <td>-10.41</td> <td>38.88</td> <td>34.89</td> <td>13.91</td> <td>29.79</td> <td>0.00</td> <td>100</td> <td>27</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5747.80	57.89	68.30	-10.41	38.88	34.89	13.91	29.79	0.00	100	27	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1 5747.80	57.89	68.30	-10.41	38.88	34.89	13.91	29.79	0.00	100	27	PEAK																															




	44																																																																																	
Mode	Harmonic																																																																																	
	U-NII-2C_5.47-5.725_802.11ac VHT40_CH102_5510MHz + LTE Band 13																																																																																	
ANT	-																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak	<p>Level (dBuV/m) vs Frequency (MHz) for Horizontal Peak. Shows 5G BAND 1-3 and 5G BAND 1-3 (AVG) traces. A peak is visible at 11020 MHz.</p>	<p>Level (dBuV/m) vs Frequency (MHz) for Vertical Peak. Shows 5G BAND 1-3 and 5G BAND 1-3 (AVG) traces. A peak is visible at 11020 MHz.</p>																																																																																
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11020.00</td> <td>43.44</td> <td>74.00</td> <td>-30.56</td> <td>52.95</td> <td>38.11</td> <td>18.10</td> <td>65.72</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11020.00	43.44	74.00	-30.56	52.95	38.11	18.10	65.72	0.00	300	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11020.00</td> <td>43.77</td> <td>74.00</td> <td>-30.23</td> <td>53.28</td> <td>38.11</td> <td>18.10</td> <td>65.72</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11020.00	43.77	74.00	-30.23	53.28	38.11	18.10	65.72	0.00	100	0	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 11020.00	43.44	74.00	-30.56	52.95	38.11	18.10	65.72	0.00	300	0	PEAK																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 11020.00	43.77	74.00	-30.23	53.28	38.11	18.10	65.72	0.00	100	0	PEAK																																																																							



Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	100	-	-	10Hz
802.11ac VHT20	100	-	-	10Hz
802.11ac VHT40	100	-	-	10Hz
802.11ac VHT80	100	-	-	10Hz

802.11a

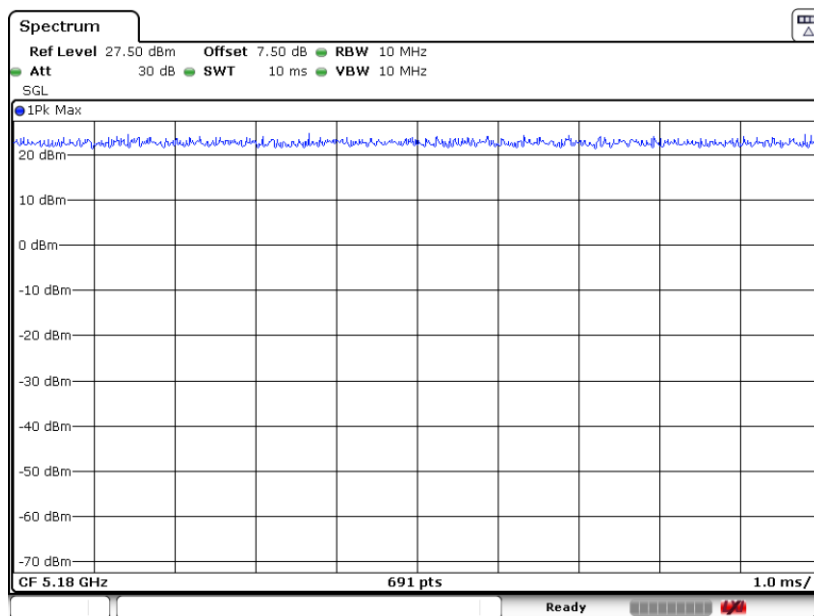




802.11ac VHT20

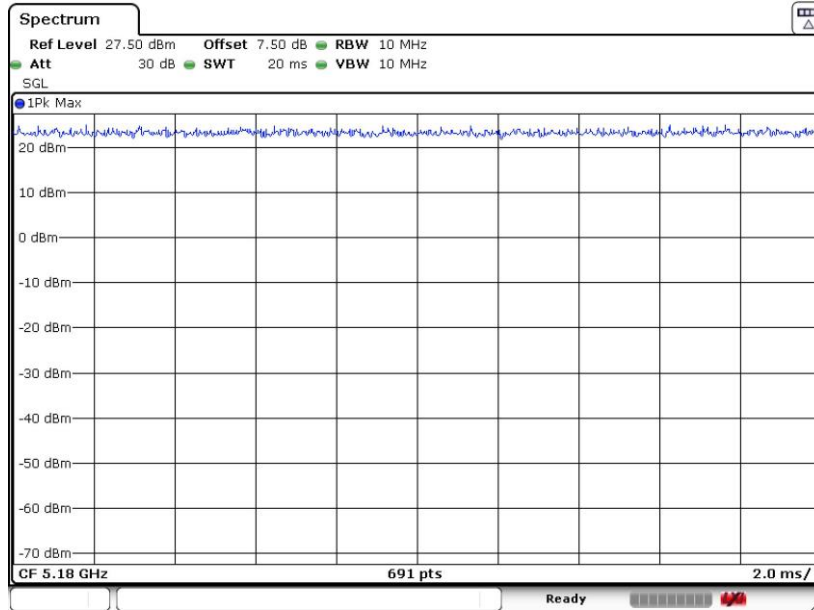

802.11ac VHT40

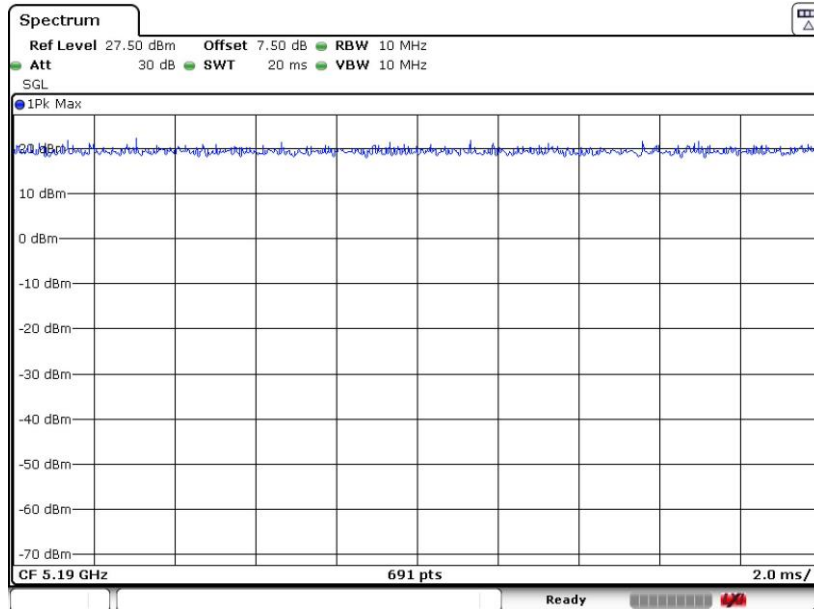



802.11ac VHT80

