




## Appendix B. AC Conducted Emission Test Results

|                 |   |                     |             |
|-----------------|---|---------------------|-------------|
| Test Engineer : | Amos Zhang  | Temperature :       | 25.3~26.2°C |
|                 |   | Relative Humidity : | 38~40%      |
| Test Voltage :  | 120Vac / 60Hz   | Phase :             | Line        |
| Remark :        | All emissions not reported here are more than 10 dB below the prescribed limit. |                     |             |

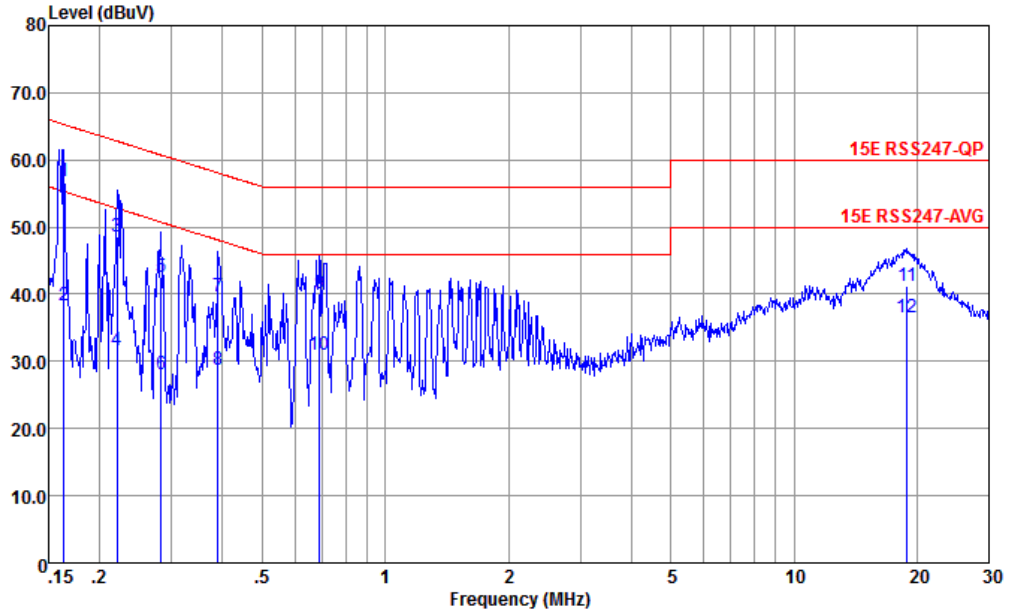


Site : CO01-KS  
 Condition : 15E RSS247-QP LISN-100334-LINE LINE

|     | Freq   | Level | Over   | Limit | Read  | LISN   | Cable | Remark  |
|-----|--------|-------|--------|-------|-------|--------|-------|---------|
|     | MHz    | dBuV  | Limit  | Line  | Level | Factor | Loss  |         |
|     |        |       | dB     | dBuV  | dBuV  | dB     | dB    |         |
| 1 * | 0.163  | 56.79 | -8.51  | 65.30 | 36.59 | 9.77   | 10.43 | QP      |
| 2   | 0.163  | 38.39 | -16.91 | 55.30 | 18.19 | 9.77   | 10.43 | Average |
| 3   | 0.221  | 48.48 | -14.31 | 62.79 | 28.50 | 9.58   | 10.40 | QP      |
| 4   | 0.221  | 31.68 | -21.21 | 52.79 | 11.60 | 9.58   | 10.40 | Average |
| 5   | 0.283  | 42.54 | -18.18 | 60.72 | 22.59 | 9.59   | 10.36 | QP      |
| 6   | 0.283  | 28.14 | -22.58 | 50.72 | 8.19  | 9.59   | 10.36 | Average |
| 7   | 0.389  | 39.58 | -18.50 | 58.08 | 19.60 | 9.68   | 10.30 | QP      |
| 8   | 0.389  | 28.78 | -19.30 | 48.08 | 8.80  | 9.68   | 10.30 | Average |
| 9   | 0.690  | 40.17 | -15.83 | 56.00 | 20.30 | 9.71   | 10.16 | QP      |
| 10  | 0.690  | 31.07 | -14.93 | 46.00 | 11.20 | 9.71   | 10.16 | Average |
| 11  | 18.920 | 41.32 | -18.68 | 60.00 | 20.59 | 9.42   | 11.31 | QP      |
| 12  | 18.920 | 36.52 | -13.48 | 50.00 | 15.79 | 9.42   | 11.31 | Average |





|                 |   |                     |             |
|-----------------|---|---------------------|-------------|
| Test Engineer : | Amos Zhang  | Temperature :       | 25.3~26.2°C |
|                 |   | Relative Humidity : | 38~40%      |
| Test Voltage :  | 120Vac / 60Hz   | Phase :             | Neutral     |
| Remark :        | All emissions not reported here are more than 10 dB below the prescribed limit. |                     |             |

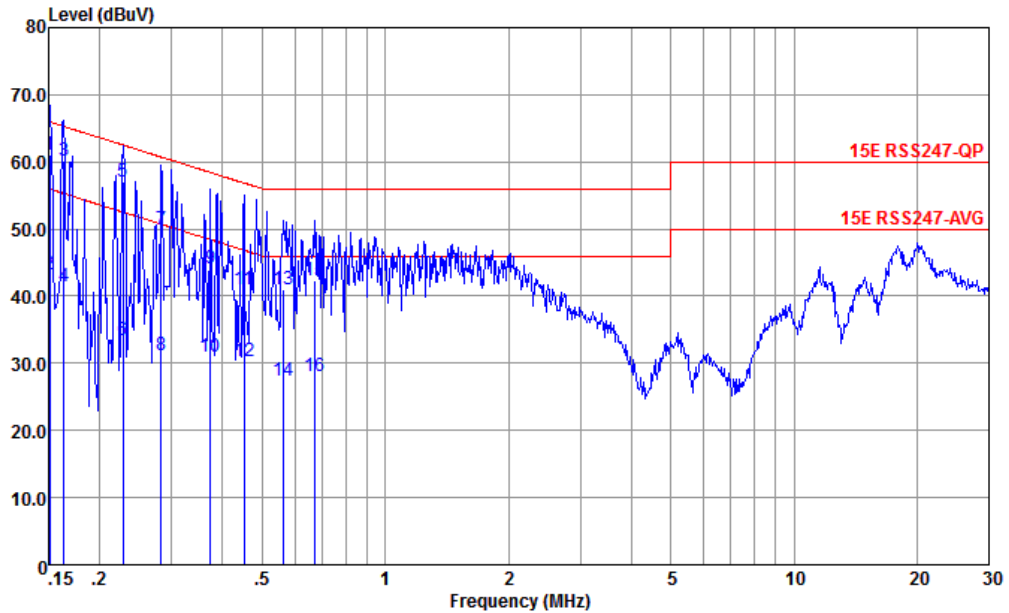

Site : CO01-KS  
 Condition : 15E RSS247-QP LISN-100334-NEUTRAL NEUTRAL

|     | Freq  | Level | Over   | Limit | Read  | LISN   | Cable | Remark  |
|-----|-------|-------|--------|-------|-------|--------|-------|---------|
|     | MHz   | dBuV  | Limit  | Line  | Level | Factor | Loss  |         |
|     |       |       | dB     | dBuV  | dBuV  | dB     | dB    |         |
| 1 * | 0.151 | 61.15 | -4.81  | 65.96 | 41.10 | 9.62   | 10.43 | QP      |
| 2   | 0.151 | 43.25 | -12.71 | 55.96 | 23.20 | 9.62   | 10.43 | Average |
| 3   | 0.163 | 60.25 | -5.05  | 65.30 | 40.20 | 9.62   | 10.43 | QP      |
| 4   | 0.163 | 41.55 | -13.75 | 55.30 | 21.50 | 9.62   | 10.43 | Average |
| 5   | 0.228 | 57.05 | -5.47  | 62.52 | 37.20 | 9.45   | 10.40 | QP      |
| 6   | 0.228 | 33.45 | -19.07 | 52.52 | 13.60 | 9.45   | 10.40 | Average |
| 7   | 0.283 | 49.99 | -10.73 | 60.72 | 30.20 | 9.43   | 10.36 | QP      |
| 8   | 0.283 | 31.29 | -19.43 | 50.72 | 11.50 | 9.43   | 10.36 | Average |
| 9   | 0.373 | 44.04 | -14.39 | 58.43 | 24.21 | 9.52   | 10.31 | QP      |
| 10  | 0.373 | 31.04 | -17.39 | 48.43 | 11.21 | 9.52   | 10.31 | Average |
| 11  | 0.452 | 41.04 | -15.81 | 56.85 | 21.20 | 9.59   | 10.25 | QP      |
| 12  | 0.452 | 30.34 | -16.51 | 46.85 | 10.50 | 9.59   | 10.25 | Average |
| 13  | 0.561 | 41.02 | -14.98 | 56.00 | 21.20 | 9.63   | 10.19 | QP      |
| 14  | 0.561 | 27.42 | -18.58 | 46.00 | 7.60  | 9.63   | 10.19 | Average |
| 15  | 0.672 | 42.36 | -13.64 | 56.00 | 22.50 | 9.69   | 10.17 | QP      |
| 16  | 0.672 | 28.16 | -17.84 | 46.00 | 8.30  | 9.69   | 10.17 | Average |

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



## Appendix C. Radiated Spurious Emission

|                 |          |                     |         |
|-----------------|----------|---------------------|---------|
| Test Engineer : | Carry Xu | Relative Humidity : | 41~42 % |
|                 |          | Temperature :       | 22~23°C |



### Radiated Spurious Emission Test Modes

| Mode    | Band     | Band (GHz) | Antenna | Modulation    | Channel | Frequency | Data Rate | RU      | Remark |
|---------|----------|------------|---------|---------------|---------|-----------|-----------|---------|--------|
| Mode 1  | U-NII-1  | 5.15-5.25  | CDD 4+5 | 802.11a       | 36      | 5180      | 6Mbps     | -       | -      |
| Mode 2  | U-NII-1  | 5.15-5.25  | CDD 4+5 | 802.11a       | 44      | 5220      | 6Mbps     | -       | -      |
| Mode 3  | U-NII-1  | 5.15-5.25  | CDD 4+5 | 802.11a       | 48      | 5240      | 6Mbps     | -       | -      |
| Mode 4  | U-NII-2A | 5.25-5.35  | CDD 4+5 | 802.11a       | 52      | 5260      | 6Mbps     | -       | -      |
| Mode 5  | U-NII-2A | 5.25-5.35  | CDD 4+5 | 802.11a       | 60      | 5300      | 6Mbps     | -       | -      |
| Mode 6  | U-NII-2A | 5.25-5.35  | CDD 4+5 | 802.11a       | 64      | 5320      | 6Mbps     | -       | -      |
| Mode 7  | U-NII-2C | 5.47-5.725 | CDD 4+5 | 802.11a       | 100     | 5500      | 6Mbps     | -       | -      |
| Mode 8  | U-NII-2C | 5.47-5.725 | CDD 4+5 | 802.11a       | 116     | 5580      | 6Mbps     | -       | -      |
| Mode 9  | U-NII-2C | 5.47-5.725 | CDD 4+5 | 802.11a       | 140     | 5700      | 6Mbps     | -       | -      |
| Mode 10 | U-NII-1  | 5.15-5.25  | CDD 4+5 | 802.11ax HE20 | 36      | 5180      | MCS0      | Full RU | -      |
| Mode 11 | U-NII-1  | 5.15-5.25  | CDD 4+5 | 802.11ax HE20 | 44      | 5220      | MCS0      | Full RU | -      |



### Radiated Spurious Emission Test Modes

| Mode    | Band     | Band (GHz) | Antenna | Modulation    | Channel | Frequency | Data Rate | RU      | Remark |
|---------|----------|------------|---------|---------------|---------|-----------|-----------|---------|--------|
| Mode 12 | U-NII-1  | 5.15-5.25  | CDD 4+5 | 802.11ax HE20 | 48      | 5240      | MCS0      | Full RU | -      |
| Mode 13 | U-NII-2A | 5.25-5.35  | CDD 4+5 | 802.11ax HE20 | 52      | 5260      | MCS0      | Full RU | -      |
| Mode 14 | U-NII-2A | 5.25-5.35  | CDD 4+5 | 802.11ax HE20 | 60      | 5300      | MCS0      | Full RU | -      |
| Mode 15 | U-NII-2A | 5.25-5.35  | CDD 4+5 | 802.11ax HE20 | 64      | 5320      | MCS0      | Full RU | -      |
| Mode 16 | U-NII-2C | 5.47-5.725 | CDD 4+5 | 802.11ax HE20 | 100     | 5500      | MCS0      | Full RU | -      |
| Mode 17 | U-NII-2C | 5.47-5.725 | CDD 4+5 | 802.11ax HE20 | 116     | 5580      | MCS0      | Full RU | -      |
| Mode 18 | U-NII-2C | 5.47-5.725 | CDD 4+5 | 802.11ax HE20 | 140     | 5700      | MCS0      | Full RU | -      |
| Mode 19 | U-NII-2C | 5.15-5.25  | CDD 4+5 | 802.11ax HE20 | 36      | 5180      | MCS0      | RU26/0  | -      |
| Mode 20 | U-NII-2C | 5.25-5.35  | CDD 4+5 | 802.11ax HE20 | 64      | 5320      | MCS0      | RU26/8  | -      |
| Mode 21 | U-NII-2A | 5.47-5.725 | CDD 4+5 | 802.11ax HE20 | 100     | 5500      | MCS0      | RU26/0  | -      |
| Mode 22 | U-NII-2C | 5.47-5.725 | CDD 4+5 | 802.11ax HE20 | 140     | 5700      | MCS0      | RU26/8  | -      |



### Radiated Spurious Emission Test Modes

| Mode    | Band     | Band (GHz) | Antenna | Modulation    | Channel | Frequency | Data Rate | RU       | Remark |
|---------|----------|------------|---------|---------------|---------|-----------|-----------|----------|--------|
| Mode 23 | U-NII-1  | 5.15-5.25  | CDD 4+5 | 802.11ax HE20 | 36      | 5180      | MCS0      | RU52/37  | -      |
| Mode 24 | U-NII-2C | 5.25-5.35  | CDD 4+5 | 802.11ax HE20 | 64      | 5320      | MCS0      | RU52/40  | -      |
| Mode 25 | U-NII-2C | 5.47-5.725 | CDD 4+5 | 802.11ax HE20 | 100     | 5500      | MCS0      | RU52/37  | -      |
| Mode 26 | U-NII-2C | 5.47-5.725 | CDD 4+5 | 802.11ax HE20 | 140     | 5700      | MCS0      | RU52/40  | -      |
| Mode 27 | U-NII-1  | 5.15-5.25  | CDD 4+5 | 802.11ax HE20 | 36      | 5180      | MCS0      | RU106/53 | -      |
| Mode 28 | U-NII-2C | 5.25-5.35  | CDD 4+5 | 802.11ax HE20 | 64      | 5320      | MCS0      | RU106/54 | -      |
| Mode 29 | U-NII-2C | 5.47-5.725 | CDD 4+5 | 802.11ax HE20 | 100     | 5500      | MCS0      | RU106/53 | -      |
| Mode 30 | U-NII-2C | 5.47-5.725 | CDD 4+5 | 802.11ax HE20 | 140     | 5700      | MCS0      | RU106/54 | -      |
| Mode 31 | U-NII-1  | 5.15-5.25  | CDD 4+5 | 802.11ax HE40 | 38      | 5190      | MCS0      | Full     | -      |
| Mode 32 | U-NII-1  | 5.15-5.25  | CDD 4+5 | 802.11ax HE40 | 46      | 5230      | MCS0      | Full     | -      |
| Mode 33 | U-NII-2A | 5.25-5.35  | CDD 4+5 | 802.11ax HE40 | 54      | 5270      | MCS0      | Full     | -      |



### Radiated Spurious Emission Test Modes

| Mode    | Band     | Band (GHz) | Antenna | Modulation    | Channel | Frequency | Data Rate | RU   | Remark |
|---------|----------|------------|---------|---------------|---------|-----------|-----------|------|--------|
| Mode 34 | U-NII-2A | 5.25-5.35  | CDD 4+5 | 802.11ax HE40 | 62      | 5310      | MCS0      | Full | -      |
| Mode 35 | U-NII-2C | 5.47-5.725 | CDD 4+5 | 802.11ax HE40 | 102     | 5510      | MCS0      | Full | -      |
| Mode 36 | U-NII-2C | 5.47-5.725 | CDD 4+5 | 802.11ax HE40 | 110     | 5550      | MCS0      | Full | -      |
| Mode 37 | U-NII-2C | 5.47-5.725 | CDD 4+5 | 802.11ax HE40 | 134     | 5670      | MCS0      | Full | -      |
| Mode 38 | U-NII-1  | 5.15-5.25  | CDD 4+5 | 802.11ax HE80 | 42      | 5210      | MCS0      | Full | -      |
| Mode 39 | U-NII-2A | 5.25-5.35  | CDD 4+5 | 802.11ax HE80 | 58      | 5290      | MCS0      | Full | -      |
| Mode 40 | U-NII-2C | 5.47-5.725 | CDD 4+5 | 802.11ax HE80 | 106     | 5530      | MCS0      | Full | -      |
| Mode 41 | U-NII-2C | 5.47-5.725 | CDD 4+5 | 802.11ax HE80 | 122     | 5610      | MCS0      | Full | -      |
| Mode 44 | U-NII-3  | 5.725-5.85 | CDD 4+5 | 802.11a       | 149     | 5745      | 6Mbps     | -    | -      |



### Radiated Spurious Emission Test Modes

| Mode    | Band    | Band (GHz) | Antenna | Modulation    | Channel | Frequency | Data Rate | RU      | Remark |
|---------|---------|------------|---------|---------------|---------|-----------|-----------|---------|--------|
| Mode 45 | U-NII-3 | 5.725-5.85 | CDD 4+5 | 802.11a       | 157     | 5785      | 6Mbps     | -       | -      |
| Mode 46 | U-NII-3 | 5.725-5.85 | CDD 4+5 | 802.11a       | 165     | 5825      | 6Mbps     | -       | -      |
| Mode 47 | U-NII-3 | 5.725-5.85 | CDD 4+5 | 802.11ax HE20 | 149     | 5745      | MCS0      | -       | -      |
| Mode 48 | U-NII-3 | 5.725-5.85 | CDD 4+5 | 802.11ax HE20 | 157     | 5785      | MCS0      | -       | -      |
| Mode 49 | U-NII-3 | 5.725-5.85 | CDD 4+5 | 802.11ax HE20 | 165     | 5825      | MCS0      | -       | -      |
| Mode 50 | U-NII-3 | 5.725-5.85 | CDD 4+5 | 802.11ax HE40 | 151     | 5755      | MCS0      | Full    | -      |
| Mode 51 | U-NII-3 | 5.725-5.85 | CDD 4+5 | 802.11ax HE40 | 159     | 5795      | MCS0      | Full    | -      |
| Mode 52 | U-NII-3 | 5.725-5.85 | CDD 4+5 | 802.11ax HE80 | 155     | 5775      | MCS0      | Full    | -      |
| Mode 53 | U-NII-3 | 5.725-5.85 | CDD 4+5 | 802.11ax HE20 | 149     | 5745      | MCS0      | RU26/0  | -      |
| Mode 54 | U-NII-3 | 5.725-5.85 | CDD 4+5 | 802.11ax HE20 | 165     | 5825      | MCS0      | RU26/8  | -      |
| Mode 55 | U-NII-3 | 5.725-5.85 | CDD 4+5 | 802.11ax HE20 | 149     | 5745      | MCS0      | RU52/37 | -      |



### Radiated Spurious Emission Test Modes

| Mode    | Band     | Band (GHz) | Antenna | Modulation    | Channel | Frequency | Data Rate | RU       | Remark |
|---------|----------|------------|---------|---------------|---------|-----------|-----------|----------|--------|
| Mode 56 | U-NII-3  | 5.725-5.85 | CDD 4+5 | 802.11ax HE20 | 165     | 5825      | MCS0      | RU52/40  | -      |
| Mode 57 | U-NII-3  | 5.725-5.85 | CDD 4+5 | 802.11ax HE20 | 149     | 5745      | MCS0      | RU106/53 | -      |
| Mode 58 | U-NII-3  | 5.725-5.85 | CDD 4+5 | 802.11ax HE20 | 165     | 5825      | MCS0      | RU106/54 | -      |
| Mode 59 | U-NII-2C | 5.47-5.85  | CDD 4+5 | 802.11a       | 144     | 5720      | MCS0      | Full RU  | -      |
| Mode 60 | U-NII-2C | 5.47-5.85  | CDD 4+5 | 802.11ax HE20 | 144     | 5720      | MCS0      | Full RU  | -      |
| Mode 61 | U-NII-2C | 5.47-5.85  | CDD 4+5 | 802.11ax HE40 | 142     | 5710      | MCS0      | Full RU  | -      |
| Mode 62 | U-NII-2C | 5.47-5.85  | CDD 4+5 | 802.11ax HE80 | 138     | 5690      | MCS0      | Full RU  | -      |
| Mode 63 | U-NII-1  | 5.15-5.25  | CDD 4+5 | 802.11ax HE20 | 36      | 5180      | MCS0      | Full RU  | LF     |
| Mode 64 | U-NII-3  | 5.725-5.85 | CDD 4+5 | 802.11a       | 165     | 5825      | 6Mbps     |          | LF     |





### Radiated Spurious Emission Test Modes

| Mode    | Band               | Band (GHz)  | Antenna | Modulation    | Channel | Frequency | Data Rate | RU      | Remark |
|---------|--------------------|-------------|---------|---------------|---------|-----------|-----------|---------|--------|
| Mode 65 | 2400-2483.5        | 2400-2483.5 | 6       | 802.11ax HE20 | 11      | 2462      | MCS0      | -       | -      |
|         | U-NII-1            | 5.15-5.25   | 5       | 802.11ax HE20 | 36      | 5180      | MCS0      | Full RU | -      |
|         | LTE-Band 41 BW=20M |             |         |               |         |           |           |         |        |
| Mode 66 | 2400-2483.5        | 2400-2483.5 | 6       | Bluetooth-LE  | 39      | 2480      | 2Mbps     | -       | -      |
|         | U-NII-1            | 5.15-5.25   | CDD 4+5 | 802.11ax HE20 | 36      | 5180      | MCS0      | Full RU | -      |
|         | LTE-Band 41 BW=20M |             |         |               |         |           |           |         |        |



### Summary of each worse mode

| Mode | Modulation | Ch. | Freq.<br>(MHz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Pol. | Peak<br>Avg. | Result | Remark    |
|------|------------|-----|----------------|-------------------|-------------------|----------------|------|--------------|--------|-----------|
| 1    | 802.11a    | 36  | 5149.90        | 50.08             | 54.00             | -3.92          | H    | AVERAGE      | Pass   | Band Edge |
|      | 802.11a    | 36  | 10361.60       | 57.80             | 68.30             | -10.50         | V    | PEAK         | Pass   | Harmonic  |
| 2    | 802.11a    | 44  | -              | -                 | -                 | -              | -    | -            | -      | Band Edge |
|      | 802.11a    | 44  | 10436.40       | 59.02             | 68.30             | -9.28          | V    | PEAK         | Pass   | Harmonic  |
| 3    | 802.11a    | 48  | -              | -                 | -                 | -              | -    | -            | -      | Band Edge |
|      | 802.11a    | 48  | 10485.90       | 59.30             | 68.30             | -9.00          | V    | PEAK         | Pass   | Harmonic  |
| 4    | 802.11a    | 52  | -              | -                 | -                 | -              | -    | -            | -      | Band Edge |
|      | 802.11a    | 52  | 15780.00       | 43.20             | 54.00             | -10.80         | V    | AVERAGE      | Pass   | Harmonic  |
| 5    | 802.11a    | 60  | -              | -                 | -                 | -              | -    | -            | -      | Band Edge |
|      | 802.11a    | 60  | 10600.01       | 48.65             | 54.00             | -5.35          | V    | AVERAGE      | Pass   | Harmonic  |
| 6    | 802.11a    | 64  | 5351.70        | 50.30             | 54.00             | -3.70          | H    | AVERAGE      | Pass   | Band Edge |



### Summary of each worse mode

| Mode | Modulation    | Ch. | Freq.<br>(MHz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Pol. | Peak<br>Avg. | Result | Remark    |
|------|---------------|-----|----------------|-------------------|-------------------|----------------|------|--------------|--------|-----------|
| 6    | 802.11a       | 64  | 10640.00       | 48.07             | 54.00             | -5.93          | V    | AVERAGE      | Pass   | Harmonic  |
| 7    | 802.11a       | 100 | 5463.12        | 62.93             | 68.30             | -5.37          | H    | PEAK         | Pass   | Band Edge |
|      | 802.11a       | 100 | 11000.00       | 39.71             | 54.00             | -14.29         | H    | AVERAGE      | Pass   | Harmonic  |
| 8    | 802.11a       | 116 | -              | -                 | -                 | -              | -    | -            | -      | Band Edge |
|      | 802.11a       | 116 | 11160.00       | 45.11             | 74.00             | -28.89         | V    | PEAK         | Pass   | Harmonic  |
| 9    | 802.11a       | 140 | 5726.36        | 63.94             | 68.30             | -4.36          | H    | PEAK         | Pass   | Band Edge |
|      | 802.11a       | 140 | 11400.00       | 46.17             | 74.00             | -27.83         | V    | PEAK         | Pass   | Harmonic  |
| 10   | 802.11ax HE20 | 36  | 5148.40        | 50.83             | 54.00             | -3.17          | H    | AVERAGE      | Pass   | Band Edge |
|      | 802.11ax HE20 | 36  | 10360.00       | 54.91             | 68.30             | -13.39         | V    | PEAK         | Pass   | Harmonic  |
| 11   | 802.11ax HE20 | 44  | -              | -                 | -                 | -              | -    | -            | -      | Band Edge |
|      | 802.11ax HE20 | 44  | 15660.00       | 41.64             | 54.00             | -12.36         | V    | AVERAGE      | Pass   | Harmonic  |



### Summary of each worse mode

| Mode | Modulation    | Ch. | Freq.<br>(MHz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Pol. | Peak<br>Avg. | Result | Remark    |
|------|---------------|-----|----------------|-------------------|-------------------|----------------|------|--------------|--------|-----------|
| 12   | 802.11ax HE20 | 48  | -              | -                 | -                 | -              | -    | -            | -      | Band Edge |
|      | 802.11ax HE20 | 48  | 10476          | 59.71             | 68.3              | -8.59          | V    | Peak         | Pass   | Harmonic  |
| 13   | 802.11ax HE20 | 52  | -              | -                 | -                 | -              | -    | -            | -      | Band Edge |
|      | 802.11ax HE20 | 52  | 10518.90       | 59.94             | 68.30             | -8.36          | V    | Peak         | Pass   | Harmonic  |
| 14   | 802.11ax HE20 | 60  | -              | -                 | -                 | -              | -    | -            | -      | Band Edge |
|      | 802.11ax HE20 | 60  | 10600.01       | 46.09             | 54.00             | -7.91          | V    | AVERAGE      | Pass   | Harmonic  |
| 15   | 802.11ax HE20 | 64  | 5350.00        | 50.42             | 54.00             | -3.58          | H    | Average      | Pass   | Band Edge |
|      | 802.11ax HE20 | 64  | 10640.00       | 45.62             | 54.00             | -8.38          | V    | AVERAGE      | Pass   | Harmonic  |
| 16   | 802.11ax HE20 | 100 | 5468.88        | 64.63             | 68.30             | -3.67          | H    | Peak         | Pass   | Band Edge |
|      | 802.11ax HE20 | 100 | 11000.00       | 40.16             | 54.00             | -13.84         | V    | AVERAGE      | Pass   | Harmonic  |
| 17   | 802.11ax HE20 | 116 | -              | -                 | -                 | -              | -    | -            | -      | Band Edge |



### Summary of each worse mode

| Mode | Modulation    | Ch. | Freq.<br>(MHz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Pol. | Peak<br>Avg. | Result | Remark    |
|------|---------------|-----|----------------|-------------------|-------------------|----------------|------|--------------|--------|-----------|
| 17   | 802.11ax HE20 | 116 | 11160.00       | 38.77             | 54.00             | -15.23         | V    | AVERAGE      | Pass   | Harmonic  |
| 18   | 802.11ax HE20 | 140 | 5725.96        | 65.00             | 68.30             | -3.30          | H    | PEAK         | Pass   | Band Edge |
|      | 802.11ax HE20 | 140 | 17098          | 53.59             | 68.3              | -14.71         | V    | Peak         | Pass   | Harmonic  |
| 19   | 802.11ax HE20 | 36  | 5149.70        | 38.90             | 54.00             | -15.10         | H    | AVERAGE      | Pass   | Band Edge |
|      | 802.11ax HE20 | 36  | -              | -                 | -                 | -              | -    | -            | -      | Harmonic  |
| 20   | 802.11ax HE20 | 64  | 5363.40        | 38.03             | 54.00             | -15.97         | H    | AVERAGE      | Pass   | Band Edge |
|      | 802.11ax HE20 | 64  | -              | -                 | -                 | -              | -    | -            | -      | Harmonic  |
| 21   | 802.11ax HE20 | 100 | 5456.72        | 38.51             | 54.00             | -15.49         | H    | AVERAGE      | Pass   | Band Edge |
|      | 802.11ax HE20 | 100 | -              | -                 | -                 | -              | -    | -            | -      | Harmonic  |
| 22   | 802.11ax HE20 | 140 | 5740.20        | 47.98             | 68.30             | -20.32         | H    | PEAK         | Pass   | Band Edge |
|      | 802.11ax HE20 | 140 | -              | -                 | -                 | -              | -    | -            | -      | Harmonic  |



### Summary of each worse mode

| Mode | Modulation    | Ch. | Freq.<br>(MHz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Pol. | Peak<br>Avg. | Result | Remark    |
|------|---------------|-----|----------------|-------------------|-------------------|----------------|------|--------------|--------|-----------|
| 23   | 802.11ax HE20 | 36  | 5141.80        | 39.59             | 54.00             | -14.41         | H    | AVERAGE      | Pass   | Band Edge |
|      | 802.11ax HE20 | 36  | -              | -                 | -                 | -              | -    | -            | -      | Harmonic  |
| 24   | 802.11ax HE20 | 64  | 5356.00        | 37.64             | 54.00             | -16.36         | H    | AVERAGE      | Pass   | Band Edge |
|      | 802.11ax HE20 | 64  | -              | -                 | -                 | -              | -    | -            | -      | Harmonic  |
| 25   | 802.11ax HE20 | 100 | 5459.12        | 38.16             | 54.00             | -15.84         | H    | AVERAGE      | Pass   | Band Edge |
|      | 802.11ax HE20 | 100 | -              | -                 | -                 | -              | -    | -            | -      | Harmonic  |
| 26   | 802.11ax HE20 | 140 | 5726.92        | 50.28             | 68.30             | -18.02         | H    | PEAK         | Pass   | Band Edge |
|      | 802.11ax HE20 | 140 | -              | -                 | -                 | -              | -    | -            | -      | Harmonic  |
| 27   | 802.11ax HE20 | 36  | 5150.00        | 40.21             | 54.00             | -13.79         | H    | AVERAGAE     | Pass   | Band Edge |
|      | 802.11ax HE20 | 36  | -              | -                 | -                 | -              | -    | -            | -      | Harmonic  |
| 28   | 802.11ax HE20 | 64  | 5354.70        | 38.63             | 54.00             | -15.37         | H    | AVERAGE      | Pass   | Band Edge |



### Summary of each worse mode

| Mode | Modulation    | Ch. | Freq.<br>(MHz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Pol. | Peak<br>Avg. | Result | Remark    |
|------|---------------|-----|----------------|-------------------|-------------------|----------------|------|--------------|--------|-----------|
| 28   | 802.11ax HE20 | 64  | -              | -                 | -                 | -              | -    | -            | -      | Harmonic  |
| 29   | 802.11ax HE20 | 100 | 5456.72        | 40.72             | 54.00             | -13.28         | H    | AVERAGE      | Pass   | Band Edge |
|      | 802.11ax HE20 | 100 | -              | -                 | -                 | -              | -    | -            | -      | Harmonic  |
| 30   | 802.11ax HE20 | 140 | 5740.84        | 53.93             | 68.30             | -14.37         | H    | PEAK         | Pass   | Band Edge |
|      | 802.11ax HE20 | 140 | -              | -                 | -                 | -              | -    | -            | -      | Harmonic  |
| 31   | 802.11ax HE40 | 38  | 5149.60        | 50.30             | 54.00             | -3.70          | H    | Average      | Pass   | Band Edge |
|      | 802.11ax HE40 | 38  | 10380.00       | 46.17             | 68.30             | -22.13         | V    | PEAK         | Pass   | Harmonic  |
| 32   | 802.11ax HE40 | 46  | 5149.76        | 41.61             | 54.00             | -12.39         | H    | AVERAGE      | Pass   | Band Edge |
|      | 802.11ax HE40 | 46  | 10460.00       | 50.93             | 68.30             | -17.37         | V    | PEAK         | Pass   | Harmonic  |
| 33   | 802.11ax HE40 | 54  | 5352.27        | 42.83             | 54.00             | -11.17         | H    | AVERAGE      | Pass   | Band Edge |
|      | 802.11ax HE40 | 54  | 10540.00       | 48.25             | 68.30             | -20.05         | V    | PEAK         | Pass   | Harmonic  |



### Summary of each worse mode

| Mode | Modulation    | Ch. | Freq.<br>(MHz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Pol. | Peak<br>Avg. | Result | Remark    |
|------|---------------|-----|----------------|-------------------|-------------------|----------------|------|--------------|--------|-----------|
| 34   | 802.11ax HE40 | 62  | 5350.00        | 50.10             | 54.00             | -3.90          | H    | Average      | Pass   | Band Edge |
|      | 802.11ax HE40 | 62  | 10620.00       | 44.70             | 74.00             | -29.30         | V    | PEAK         | Pass   | Harmonic  |
| 35   | 802.11ax HE40 | 102 | 5458.64        | 48.64             | 54.00             | -5.36          | H    | AVERAGE      | Pass   | Band Edge |
|      | 802.11ax HE40 | 102 | 11020.00       | 43.36             | 74.00             | -30.64         | H    | PEAK         | Pass   | Harmonic  |
| 36   | 802.11ax HE40 | 110 | 5456.00        | 41.82             | 54.00             | -12.18         | H    | AVERAGE      | Pass   | Band Edge |
|      | 802.11ax HE40 | 110 | 11100.00       | 45.26             | 74.00             | -28.74         | V    | PEAK         | Pass   | Harmonic  |
| 37   | 802.11ax HE40 | 134 | 5726.28        | 55.83             | 68.30             | -12.47         | H    | PEAK         | Pass   | Band Edge |
|      | 802.11ax HE40 | 134 | 11340.00       | 43.69             | 74.00             | -30.31         | H    | PEAK         | Pass   | Harmonic  |
| 38   | 802.11ax HE80 | 42  | 5149.76        | 48.86             | 54.00             | -5.14          | H    | AVERAGE      | Pass   | Band Edge |
|      | 802.11ax HE80 | 42  | 10420.00       | 44.03             | 68.30             | -24.27         | V    | PEAK         | Pass   | Harmonic  |
| 39   | 802.11ax HE80 | 58  | 5350.60        | 50.39             | 54.00             | -3.61          | H    | AVERAGE      | Pass   | Band Edge |





### Summary of each worse mode

| Mode | Modulation    | Ch. | Freq.<br>(MHz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Pol. | Peak<br>Avg. | Result | Remark    |
|------|---------------|-----|----------------|-------------------|-------------------|----------------|------|--------------|--------|-----------|
| 39   | 802.11ax HE80 | 58  | 10580.00       | 43.73             | 68.30             | -24.57         | H    | PEAK         | Pass   | Harmonic  |
| 40   | 802.11ax HE80 | 106 | 5456.40        | 50.53             | 54.00             | -3.47          | H    | AVERAGE      | Pass   | Band Edge |
|      | 802.11ax HE80 | 106 | 11060.00       | 41.90             | 74.00             | -32.10         | H    | PEAK         | Pass   | Harmonic  |
| 41   | 802.11ax HE80 | 122 | 5457.04        | 43.82             | 54.00             | -10.18         | H    | AVERAGE      | Pass   | Band Edge |
|      | 802.11ax HE80 | 122 | 11220.00       | 42.11             | 74.00             | -31.89         | V    | PEAK         | Pass   | Harmonic  |
| 44   | 802.11a       | 149 | 5646.00        | 51.63             | 68.30             | -16.67         | H    | PEAK         | Pass   | Band Edge |
|      | 802.11a       | 149 | 17232.20       | 58.27             | 68.30             | -10.03         | V    | PEAK         | Pass   | Harmonic  |
| 45   | 802.11a       | 157 | -              | -                 | -                 | -              | -    | -            | -      | Band Edge |
|      | 802.11a       | 157 | 17356.13       | 62.59             | 68.30             | -5.71          | V    | PEAK         | Pass   | Harmonic  |



### Summary of each worse mode

| Mode | Modulation    | Ch. | Freq.<br>(MHz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Pol. | Peak<br>Avg. | Result | Remark    |
|------|---------------|-----|----------------|-------------------|-------------------|----------------|------|--------------|--------|-----------|
| 46   | 802.11a       | 165 | 5950.80        | 48.20             | 68.30             | -20.10         | H    | PEAK         | Pass   | Band Edge |
|      | 802.11a       | 165 | 17474.93       | 63.85             | 68.30             | -4.45          | H    | PEAK         | Pass   | Harmonic  |
| 47   | 802.11ax HE20 | 149 | 5644.00        | 49.55             | 68.30             | -18.75         | H    | PEAK         | Pass   | Band Edge |
|      | 802.11ax HE20 | 149 | 17232.93       | 61.18             | 68.30             | -7.12          | V    | PEAK         | Pass   | Harmonic  |
| 48   | 802.11ax HE20 | 157 | -              | -                 | -                 | -              | -    | -            | -      | Band Edge |
|      | 802.11ax HE20 | 157 | 17356.13       | 63.14             | 68.30             | -5.16          | V    | PEAK         | Pass   | Harmonic  |
| 49   | 802.11ax HE20 | 165 | 5932.00        | 47.29             | 68.30             | -21.01         | V    | PEAK         | Pass   | Band Edge |
|      | 802.11ax HE20 | 165 | 17478.60       | 61.83             | 68.30             | -6.47          | H    | PEAK         | Pass   | Harmonic  |
| 50   | 802.11ax HE40 | 151 | 5625.27        | 50.62             | 68.30             | -17.68         | H    | PEAK         | Pass   | Band Edge |
|      | 802.11ax HE40 | 151 | 17257.13       | 53.67             | 68.30             | -14.63         | V    | PEAK         | Pass   | Harmonic  |
| 51   | 802.11ax HE40 | 159 | 5641.60        | 50.60             | 68.30             | -17.70         | H    | PEAK         | Pass   | Band Edge |



### Summary of each worse mode

| Mode | Modulation    | Ch. | Freq.<br>(MHz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Pol. | Peak<br>Avg. | Result | Remark    |
|------|---------------|-----|----------------|-------------------|-------------------|----------------|------|--------------|--------|-----------|
| 51   | 802.11ax HE40 | 159 | 17392.80       | 58.70             | 68.30             | -9.60          | V    | PEAK         | Pass   | Harmonic  |
| 52   | 802.11ax HE80 | 155 | 5650.80        | 52.26             | 68.89             | -16.63         | H    | PEAK         | Pass   | Band Edge |
|      | 802.11ax HE80 | 155 | 11550.00       | 41.80             | 74.00             | -32.20         | V    | PEAK         | Pass   | Harmonic  |
| 53   | 802.11ax HE20 | 149 | 5644.40        | 48.54             | 68.30             | -19.76         | H    | PEAK         | Pass   | Band Edge |
|      | 802.11ax HE20 | 149 | -              | -                 | -                 | -              | -    | -            | -      | Harmonic  |
| 54   | 802.11ax HE20 | 165 | 5940.40        | 47.33             | 68.30             | -20.97         | H    | PEAK         | Pass   | Band Edge |
|      | 802.11ax HE20 | 165 | -              | -                 | -                 | -              | -    | -            | -      | Harmonic  |
| 55   | 802.11ax HE20 | 149 | 5632.00        | 48.78             | 68.30             | -19.52         | H    | PEAK         | Pass   | Band Edge |
|      | 802.11ax HE20 | 149 | -              | -                 | -                 | -              | -    | -            | -      | Harmonic  |
| 56   | 802.11ax HE20 | 165 | 5935.60        | 47.75             | 68.30             | -20.55         | H    | PEAK         | Pass   | Band Edge |
|      | 802.11ax HE20 | 165 | -              | -                 | -                 | -              | -    | -            | -      | Harmonic  |



### Summary of each worse mode





| Mode | Modulation    | Ch. | Freq.<br>(MHz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Pol. | Peak<br>Avg. | Result | Remark    |
|------|---------------|-----|----------------|-------------------|-------------------|----------------|------|--------------|--------|-----------|
| 57   | 802.11ax HE20 | 149 | 5633.20        | 49.95             | 68.30             | -18.35         | H    | PEAK         | Pass   | Band Edge |
|      | 802.11ax HE20 | 149 | -              | -                 | -                 | -              | -    | -            | -      | Harmonic  |
| 58   | 802.11ax HE20 | 165 | 5933.20        | 47.44             | 68.30             | -20.86         | H    | PEAK         | Pass   | Band Edge |
|      | 802.11ax HE20 | 165 | -              | -                 | -                 | -              | -    | -            | -      | Harmonic  |
| 59   | 802.11a       | 144 | -              | -                 | -                 | -              | -    | -            | -      | Band Edge |
|      | 802.11a       | 144 | 17167.30       | 55.89             | 68.30             | -12.41         | V    | PEAK         | Pass   | Harmonic  |
| 60   | 802.11ax HE20 | 144 | -              | -                 | -                 | -              | -    | -            | -      | Band Edge |
|      | 802.11ax HE20 | 144 | 17169.50       | 53.07             | 68.30             | -15.23         | V    | PEAK         | Pass   | Harmonic  |
| 61   | 802.11ax HE40 | 142 | -              | -                 | -                 | -              | -    | -            | -      | Band Edge |
|      | 802.11ax HE40 | 142 | 11420.00       | 43.46             | 74.00             | -30.54         | V    | PEAK         | Pass   | Harmonic  |
| 62   | 802.11ax HE80 | 138 | -              | -                 | -                 | -              | -    | -            | -      | Band Edge |







### Summary of each worse mode

| Mode | Modulation    | Ch. | Freq.<br>(MHz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Pol. | Peak<br>Avg. | Result | Remark    |
|------|---------------|-----|----------------|-------------------|-------------------|----------------|------|--------------|--------|-----------|
| 62   | 802.11ax HE80 | 138 | 11380.00       | 41.93             | 74.00             | -32.07         | V    | PEAK         | Pass   | Harmonic  |
| 63   | 802.11ax HE20 | 36  | 45.52          | 28.94             | 40.00             | -11.06         | V    | PEAK         | Pass   | LF        |
| 64   | 802.11ax HE20 | 165 | 45.52          | 29.54             | 40.00             | -10.46         | V    | PEAK         | Pass   | LF        |
| 65   | 802.11ax HE20 | 11  | 2483.50        | 47.80             | 54.00             | -6.20          | H    | AVERAGE      | Pass   | Band Edge |
|      | 802.11ax HE20 | 11  | 7386.00        | 40.42             | 74.00             | -33.58         | H    | PEAK         | Pass   | Harmonic  |
|      | 802.11ax HE20 | 36  | 5149.7         | 50.71             | 54                | -3.29          | H    | AVERAGE      | Pass   | Band Edge |
|      | 802.11ax HE20 | 36  | 10336.30       | 46.60             | 68.30             | -21.70         | V    | PEAK         | Pass   | Harmonic  |
| 66   | Bluetooth-LE  | 39  | 2483.50        | 40.73             | 54.00             | -13.27         | H    | AVERAGE      | Pass   | Band Edge |
|      | Bluetooth-LE  | 39  | 10360.50       | 51.06             | 74.00             | -22.94         | V    | PEAK         | Pass   | Harmonic  |
|      | 802.11ax HE20 | 36  | 5149.00        | 50.84             | 54.00             | -3.16          | H    | AVERAGE      | Pass   | Band Edge |
|      | 802.11ax HE20 | 36  | 10363.80       | 56.73             | 68.30             | -11.57         | V    | PEAK         | Pass   | Harmonic  |

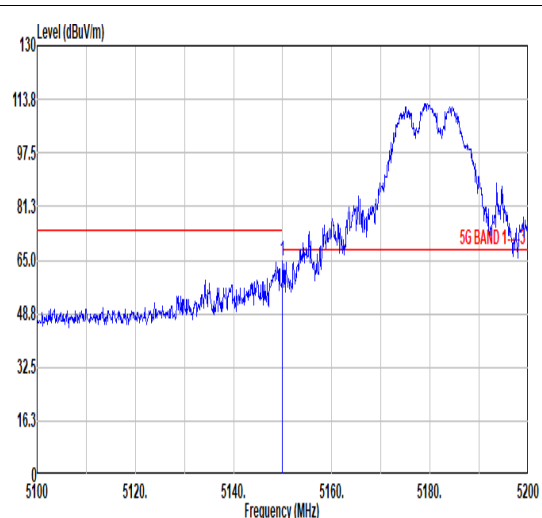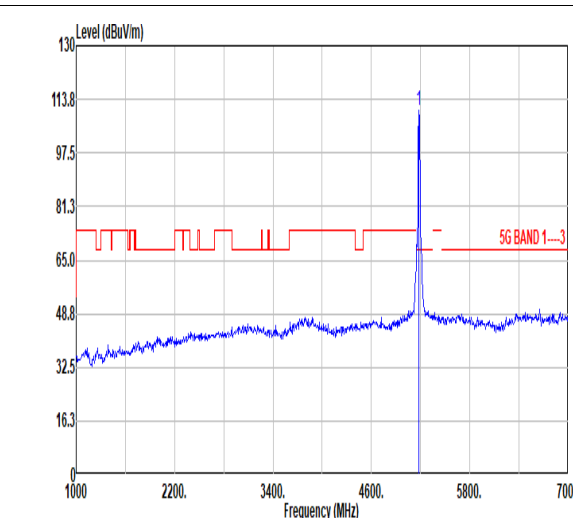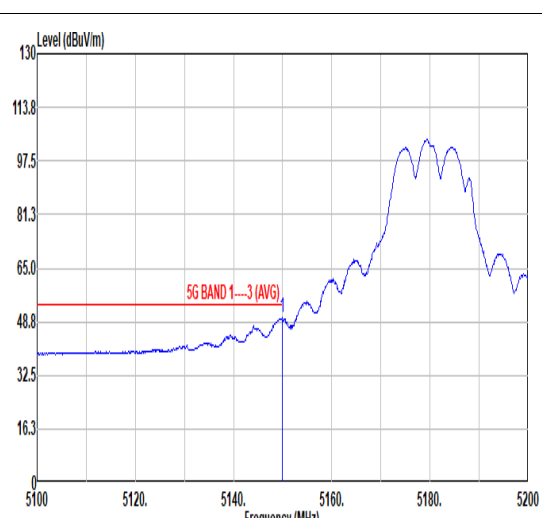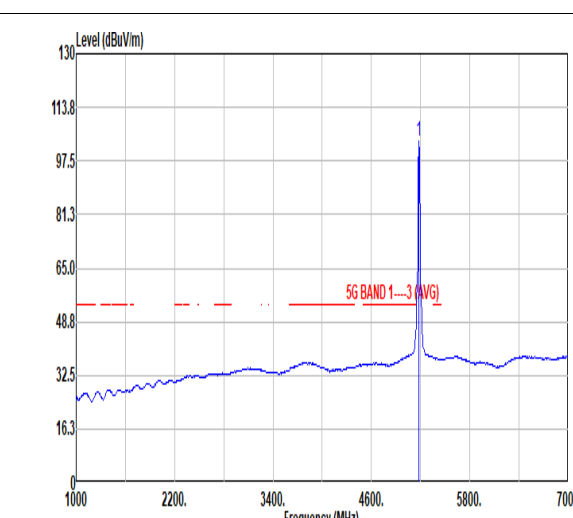

|       |   | 1           |        |        |        |        |        |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
|-------|---|-------------|--------|--------|--------|--------|--------|-------|------|------|-------|---------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|---|---------|-------|-------|-------|-------|-------|-------|-------|------|-----|----|---------|---|-------|------|-----|-------|--------|-----|------|------|------|-------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|---|---------|--------|-------|-------|--------|-------|-------|-------|------|-----|----|---------|
| Mode  | Band Edge   |             |        |        |        |        |        |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
|       | U-NII-1_5.15-5.25_802.11a_CH36_5180MHz  |             |        |        |        |        |        |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| ANT   | CDD 4+5   |             |        |        |        |        |        |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Pol.  | Horizontal  | Fundamental |        |        |        |        |        |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Peak  |  <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>5G BAND 1-3</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>64.70</td> <td>74.00</td> <td>-9.30</td> <td>56.91</td> <td>34.23</td> <td>10.61</td> <td>37.05</td> <td>0.00</td> <td>105</td> <td>73</td> <td>PEAK</td> </tr> </tbody> </table>           | Limit       | Read   | Ant    | Cable  | Preamp | Aux    | APos  | TPos | Freq | Level | Line    | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 5150.00 | 64.70 | 74.00 | -9.30 | 56.91 | 34.23 | 10.61 | 37.05 | 0.00 | 105 | 73 | PEAK    |  <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>5G BAND 1-3</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>110.40</td> <td>-----</td> <td>-----</td> <td>102.47</td> <td>34.28</td> <td>10.64</td> <td>36.99</td> <td>0.00</td> <td>105</td> <td>73</td> <td>PEAK</td> </tr> </tbody> </table>          | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 5180.00 | 110.40 | ----- | ----- | 102.47 | 34.28 | 10.64 | 36.99 | 0.00 | 105 | 73 | PEAK    |
|       | Limit   | Read        | Ant    | Cable  | Preamp | Aux    | APos   | TPos  |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Freq  | Level   | Line        | Margin | Level  | Factor | Loss   | Factor |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| MHz   | dBuV/m  | dBuV/m      | dB     | dBuV   | dB/m   | dB     | dB     |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| 1     | 5150.00   | 64.70       | 74.00  | -9.30  | 56.91  | 34.23  | 10.61  | 37.05 | 0.00 | 105  | 73    | PEAK    |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Limit | Read  | Ant         | Cable  | Preamp | Aux    | APos   | TPos   |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Freq  | Level   | Line        | Margin | Level  | Factor | Loss   | Factor |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| MHz   | dBuV/m  | dBuV/m      | dB     | dBuV   | dB/m   | dB     | dB     |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| 1     | 5180.00   | 110.40      | -----  | -----  | 102.47 | 34.28  | 10.64  | 36.99 | 0.00 | 105  | 73    | PEAK    |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Avg   |  <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>5G BAND 1-3 (AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.90</td> <td>50.00</td> <td>54.00</td> <td>-3.92</td> <td>42.29</td> <td>34.23</td> <td>10.61</td> <td>37.05</td> <td>0.00</td> <td>105</td> <td>73</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit       | Read   | Ant    | Cable  | Preamp | Aux    | APos  | TPos | Freq | Level | Line    | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 5149.90 | 50.00 | 54.00 | -3.92 | 42.29 | 34.23 | 10.61 | 37.05 | 0.00 | 105 | 73 | AVERAGE |  <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>5G BAND 1-3 (AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>103.29</td> <td>-----</td> <td>-----</td> <td>95.36</td> <td>34.28</td> <td>10.64</td> <td>36.99</td> <td>0.00</td> <td>105</td> <td>73</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 5180.00 | 103.29 | ----- | ----- | 95.36  | 34.28 | 10.64 | 36.99 | 0.00 | 105 | 73 | AVERAGE |
|       | Limit   | Read        | Ant    | Cable  | Preamp | Aux    | APos   | TPos  |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Freq  | Level   | Line        | Margin | Level  | Factor | Loss   | Factor |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| MHz   | dBuV/m  | dBuV/m      | dB     | dBuV   | dB/m   | dB     | dB     |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| 1     | 5149.90   | 50.00       | 54.00  | -3.92  | 42.29  | 34.23  | 10.61  | 37.05 | 0.00 | 105  | 73    | AVERAGE |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Limit | Read  | Ant         | Cable  | Preamp | Aux    | APos   | TPos   |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Freq  | Level   | Line        | Margin | Level  | Factor | Loss   | Factor |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| MHz   | dBuV/m  | dBuV/m      | dB     | dBuV   | dB/m   | dB     | dB     |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| 1     | 5180.00   | 103.29      | -----  | -----  | 95.36  | 34.28  | 10.64  | 36.99 | 0.00 | 105  | 73    | AVERAGE |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |

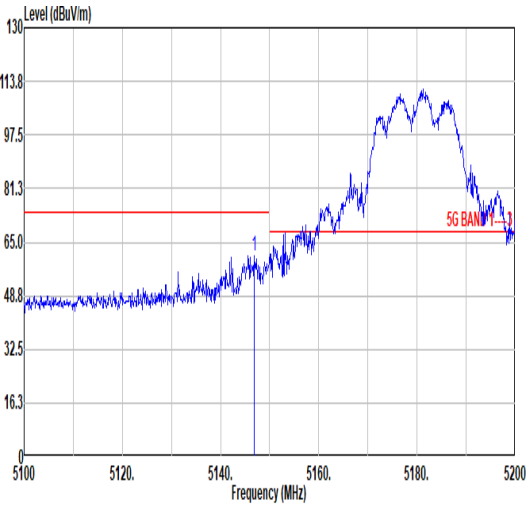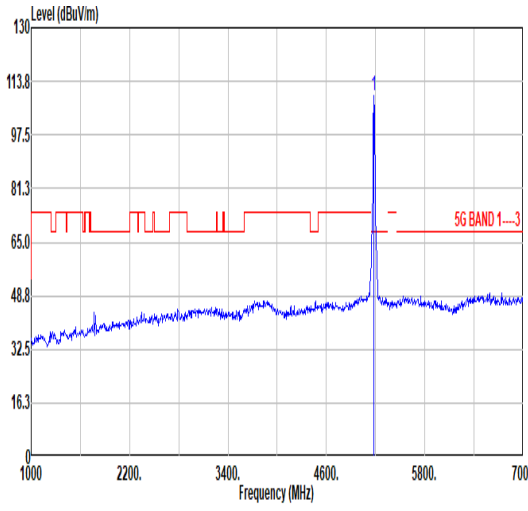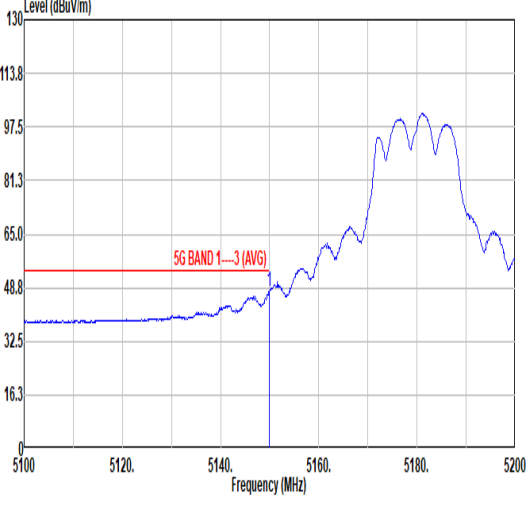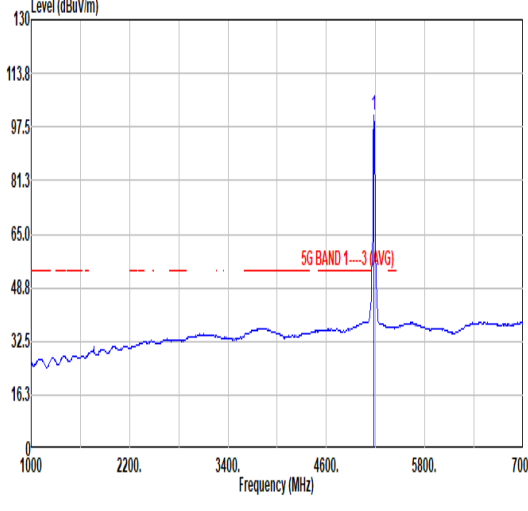

| 1   |   |        |        |        |        |        |        |       |      |       |       |         |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |       |       |        |       |       |       |       |      |     |         |         |
|---|---|--------|--------|--------|--------|--------|--------|-------|------|-------|-------|---------|--------|--------|--------|--------|--------|--------|--------|--------|------|------|------|----|----|---------|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|---------|---------|
| Mode  | Band Edge   |        |        |        |        |        |        |       |      |       |       |         |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |       |       |        |       |       |       |       |      |     |         |         |
|   | U-NII-1_5.15-5.25_802.11a_CH36_5180MHz  |        |        |        |        |        |        |       |      |       |       |         |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |       |       |        |       |       |       |       |      |     |         |         |
| ANT   | CDD 4+5   |        |        |        |        |        |        |       |      |       |       |         |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |       |       |        |       |       |       |       |      |     |         |         |
| Pol.  | Vertical  |        |        |        |        |        |        |       |      |       |       |         |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |       |       |        |       |       |       |       |      |     |         |         |
| Peak  |  <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical Peak. The plot shows a signal rising from 48.8 dBuV/m at 5100 MHz to a peak of approximately 113.8 dBuV/m at 5180 MHz. A red horizontal line indicates the 5G BAND 1-3 limit at 65.0 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5146.80</td> <td>60.95</td> <td>74.00</td> <td>-13.05</td> <td>53.17</td> <td>34.22</td> <td>10.61</td> <td>37.05</td> <td>0.00</td> <td>355</td> <td>240</td> <td>PEAK</td> </tr> </tbody> </table> | Limit  | Read   | Ant    | Cable  | Preamp | Aux    | APos  | TPos | Freq  | Level | Line    | Margin | Level  | Factor | Loss   | Factor | MHz    | dBuV/m | dBuV/m | dB   | dBuV | dB/m | dB | dB | 1       | 5146.80 | 60.95 | 74.00 | -13.05 | 53.17 | 34.22 | 10.61 | 37.05 | 0.00 | 355 | 240     | PEAK    |
|   | Limit   | Read   | Ant    | Cable  | Preamp | Aux    | APos   | TPos  |      |       |       |         |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |       |       |        |       |       |       |       |      |     |         |         |
| Freq  | Level   | Line   | Margin | Level  | Factor | Loss   | Factor |       |      |       |       |         |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |       |       |        |       |       |       |       |      |     |         |         |
| MHz   | dBuV/m  | dBuV/m | dB     | dBuV   | dB/m   | dB     | dB     |       |      |       |       |         |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |       |       |        |       |       |       |       |      |     |         |         |
| 1   | 5146.80   | 60.95  | 74.00  | -13.05 | 53.17  | 34.22  | 10.61  | 37.05 | 0.00 | 355   | 240   | PEAK    |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |       |       |        |       |       |       |       |      |     |         |         |
|  <p>Vertical Fundamental Peak Spectrum Plot. Shows a sharp peak at 5180 MHz reaching 113.8 dBuV/m. A red horizontal line indicates the 5G BAND 1-3 limit at 65.0 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>109.16</td> <td>-----</td> <td>-----</td> <td>101.23</td> <td>34.28</td> <td>10.64</td> <td>36.99</td> <td>0.00</td> <td>355</td> <td>240</td> <td>PEAK</td> </tr> </tbody> </table>                     | Limit   | Read   | Ant    | Cable  | Preamp | Aux    | APos   | TPos  | Freq | Level | Line  | Margin  | Level  | Factor | Loss   | Factor | MHz    | dBuV/m | dBuV/m | dB     | dBuV | dB/m | dB   | dB | 1  | 5180.00 | 109.16  | ----- | ----- | 101.23 | 34.28 | 10.64 | 36.99 | 0.00  | 355  | 240 | PEAK    |         |
| Limit   | Read  | Ant    | Cable  | Preamp | Aux    | APos   | TPos   |       |      |       |       |         |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |       |       |        |       |       |       |       |      |     |         |         |
| Freq  | Level   | Line   | Margin | Level  | Factor | Loss   | Factor |       |      |       |       |         |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |       |       |        |       |       |       |       |      |     |         |         |
| MHz   | dBuV/m  | dBuV/m | dB     | dBuV   | dB/m   | dB     | dB     |       |      |       |       |         |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |       |       |        |       |       |       |       |      |     |         |         |
| 1   | 5180.00   | 109.16 | -----  | -----  | 101.23 | 34.28  | 10.64  | 36.99 | 0.00 | 355   | 240   | PEAK    |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |       |       |        |       |       |       |       |      |     |         |         |
| Avg   |  <p>Vertical Average Spectrum Plot. Shows the average signal level across the frequency range. A red horizontal line indicates the 5G BAND 1-3 (AVG) limit at 48.8 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>47.49</td> <td>54.00</td> <td>-6.51</td> <td>39.70</td> <td>34.23</td> <td>10.61</td> <td>37.05</td> <td>0.00</td> <td>355</td> <td>240</td> <td>AVERAGE</td> </tr> </tbody> </table>  | Limit  | Read   | Ant    | Cable  | Preamp | Aux    | APos  | TPos | Freq  | Level | Line    | Margin | Level  | Factor | Loss   | Factor | MHz    | dBuV/m | dBuV/m | dB   | dBuV | dB/m | dB | dB | 1       | 5150.00 | 47.49 | 54.00 | -6.51  | 39.70 | 34.23 | 10.61 | 37.05 | 0.00 | 355 | 240     | AVERAGE |
|   | Limit   | Read   | Ant    | Cable  | Preamp | Aux    | APos   | TPos  |      |       |       |         |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |       |       |        |       |       |       |       |      |     |         |         |
| Freq  | Level   | Line   | Margin | Level  | Factor | Loss   | Factor |       |      |       |       |         |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |       |       |        |       |       |       |       |      |     |         |         |
| MHz   | dBuV/m  | dBuV/m | dB     | dBuV   | dB/m   | dB     | dB     |       |      |       |       |         |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |       |       |        |       |       |       |       |      |     |         |         |
| 1   | 5150.00   | 47.49  | 54.00  | -6.51  | 39.70  | 34.23  | 10.61  | 37.05 | 0.00 | 355   | 240   | AVERAGE |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |       |       |        |       |       |       |       |      |     |         |         |
|  <p>Vertical Fundamental Average Spectrum Plot. Shows the average signal level for the fundamental component. A red horizontal line indicates the 5G BAND 1-3 (AVG) limit at 48.8 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>101.12</td> <td>-----</td> <td>-----</td> <td>93.19</td> <td>34.28</td> <td>10.64</td> <td>36.99</td> <td>0.00</td> <td>355</td> <td>240</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit   | Read   | Ant    | Cable  | Preamp | Aux    | APos   | TPos  | Freq | Level | Line  | Margin  | Level  | Factor | Loss   | Factor | MHz    | dBuV/m | dBuV/m | dB     | dBuV | dB/m | dB   | dB | 1  | 5180.00 | 101.12  | ----- | ----- | 93.19  | 34.28 | 10.64 | 36.99 | 0.00  | 355  | 240 | AVERAGE |         |
| Limit   | Read  | Ant    | Cable  | Preamp | Aux    | APos   | TPos   |       |      |       |       |         |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |       |       |        |       |       |       |       |      |     |         |         |
| Freq  | Level   | Line   | Margin | Level  | Factor | Loss   | Factor |       |      |       |       |         |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |       |       |        |       |       |       |       |      |     |         |         |
| MHz   | dBuV/m  | dBuV/m | dB     | dBuV   | dB/m   | dB     | dB     |       |      |       |       |         |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |       |       |        |       |       |       |       |      |     |         |         |
| 1   | 5180.00   | 101.12 | -----  | -----  | 93.19  | 34.28  | 10.64  | 36.99 | 0.00 | 355   | 240   | AVERAGE |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |       |       |        |       |       |       |       |      |     |         |         |



| Mode     | 1  |          |        |        |        |        |        |        |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
|----------|--|----------|--------|--------|--------|--------|--------|--------|------|--------|------|---------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|
|          | Harmonic   |          |        |        |        |        |        |        |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
|          | U-NII-1_5.15-5.25_802.11a_CH36_5180MHz   |          |        |        |        |        |        |        |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| ANT      | CDD 4+5  |          |        |        |        |        |        |        |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| Pol.     | Horizontal   | Vertical |        |        |        |        |        |        |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10361.60</td> <td>50.40</td> <td>68.30</td> <td>-17.90</td> <td>64.63</td> <td>37.46</td> <td>15.45</td> <td>67.14</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>53.78</td> <td>74.00</td> <td>-20.22</td> <td>58.81</td> <td>40.09</td> <td>19.04</td> <td>64.16</td> <td>0.00</td> <td>112</td> <td>342</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15540.00</td> <td>40.11</td> <td>54.00</td> <td>-13.89</td> <td>45.14</td> <td>40.09</td> <td>19.04</td> <td>64.16</td> <td>0.00</td> <td>112</td> <td>342</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit    | Read   | Ant    | Cable  | Preamp | Aux    | APos   | TPos | Remark | Freq | Level   | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 | 10361.60 | 50.40 | 68.30 | -17.90 | 64.63 | 37.46 | 15.45 | 67.14 | 0.00 | --- | --- | PEAK | 2 | 15540.00 | 53.78 | 74.00 | -20.22 | 58.81 | 40.09 | 19.04 | 64.16 | 0.00 | 112 | 342 | PEAK | 3 | 15540.00 | 40.11 | 54.00 | -13.89 | 45.14 | 40.09 | 19.04 | 64.16 | 0.00 | 112 | 342 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10361.60</td> <td>57.80</td> <td>68.30</td> <td>-10.50</td> <td>72.03</td> <td>37.46</td> <td>15.45</td> <td>67.14</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>53.78</td> <td>74.00</td> <td>-20.22</td> <td>58.81</td> <td>40.09</td> <td>19.04</td> <td>64.16</td> <td>0.00</td> <td>112</td> <td>342</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15540.00</td> <td>40.11</td> <td>54.00</td> <td>-13.89</td> <td>45.14</td> <td>40.09</td> <td>19.04</td> <td>64.16</td> <td>0.00</td> <td>112</td> <td>342</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 | 10361.60 | 57.80 | 68.30 | -10.50 | 72.03 | 37.46 | 15.45 | 67.14 | 0.00 | --- | --- | PEAK | 2 | 15540.00 | 53.78 | 74.00 | -20.22 | 58.81 | 40.09 | 19.04 | 64.16 | 0.00 | 112 | 342 | PEAK | 3 | 15540.00 | 40.11 | 54.00 | -13.89 | 45.14 | 40.09 | 19.04 | 64.16 | 0.00 | 112 | 342 | AVERAGE |
| Limit    | Read   | Ant      | Cable  | Preamp | Aux    | APos   | TPos   | Remark |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| Freq     | Level  | Line     | Margin | Level  | Factor | Loss   | Factor | Factor |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| MHz      | dBuV/m   | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB     | dB     |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| 1        | 10361.60   | 50.40    | 68.30  | -17.90 | 64.63  | 37.46  | 15.45  | 67.14  | 0.00 | ---    | ---  | PEAK    |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| 2        | 15540.00   | 53.78    | 74.00  | -20.22 | 58.81  | 40.09  | 19.04  | 64.16  | 0.00 | 112    | 342  | PEAK    |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| 3        | 15540.00   | 40.11    | 54.00  | -13.89 | 45.14  | 40.09  | 19.04  | 64.16  | 0.00 | 112    | 342  | AVERAGE |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| Limit    | Read   | Ant      | Cable  | Preamp | Aux    | APos   | TPos   | Remark |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| Freq     | Level  | Line     | Margin | Level  | Factor | Loss   | Factor | Factor |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| MHz      | dBuV/m   | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB     | dB     |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| 1        | 10361.60   | 57.80    | 68.30  | -10.50 | 72.03  | 37.46  | 15.45  | 67.14  | 0.00 | ---    | ---  | PEAK    |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| 2        | 15540.00   | 53.78    | 74.00  | -20.22 | 58.81  | 40.09  | 19.04  | 64.16  | 0.00 | 112    | 342  | PEAK    |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| 3        | 15540.00   | 40.11    | 54.00  | -13.89 | 45.14  | 40.09  | 19.04  | 64.16  | 0.00 | 112    | 342  | AVERAGE |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |





| Mode     | 2   |          |        |        |        |        |        |        |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |       |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
|----------|---|----------|--------|--------|--------|--------|--------|--------|------|--------|------|---------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|----|---------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|-----|---|----------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|
|          | Harmonic  |          |        |        |        |        |        |        |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |       |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
|          | U-NII-1_5.15-5.25_802.11a_CH44_5220MHz  |          |        |        |        |        |        |        |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |       |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| ANT      | CDD 4+5   |          |        |        |        |        |        |        |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |       |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| Pol.     | Horizontal  | Vertical |        |        |        |        |        |        |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |       |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10444.10</td> <td>51.33</td> <td>68.30</td> <td>-16.97</td> <td>65.40</td> <td>37.51</td> <td>15.53</td> <td>67.11</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>53.53</td> <td>74.00</td> <td>-20.47</td> <td>58.38</td> <td>40.20</td> <td>19.12</td> <td>64.17</td> <td>0.00</td> <td>107</td> <td>19</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15660.00</td> <td>40.86</td> <td>54.00</td> <td>-13.14</td> <td>45.72</td> <td>40.19</td> <td>19.12</td> <td>64.17</td> <td>0.00</td> <td>107</td> <td>19</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit    | Read   | Ant    | Cable  | Preamp | Aux    | APos   | TPos | Remark | Freq | Level   | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 10444.10 | 51.33 | 68.30 | -16.97 | 65.40 | 37.51 | 15.53 | 67.11 | 0.00 | --- | --- | PEAK | 2 | 15660.00 | 53.53 | 74.00 | -20.47 | 58.38 | 40.20 | 19.12 | 64.17 | 0.00 | 107 | 19 | PEAK | 3 | 15660.00 | 40.86 | 54.00 | -13.14 | 45.72 | 40.19 | 19.12 | 64.17 | 0.00 | 107 | 19 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10436.40</td> <td>59.02</td> <td>68.30</td> <td>-9.28</td> <td>73.10</td> <td>37.51</td> <td>15.52</td> <td>67.11</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>56.39</td> <td>74.00</td> <td>-17.61</td> <td>61.24</td> <td>40.20</td> <td>19.12</td> <td>64.17</td> <td>0.00</td> <td>101</td> <td>344</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15660.00</td> <td>43.47</td> <td>54.00</td> <td>-10.53</td> <td>48.33</td> <td>40.19</td> <td>19.12</td> <td>64.17</td> <td>0.00</td> <td>101</td> <td>344</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 10436.40 | 59.02 | 68.30 | -9.28 | 73.10 | 37.51 | 15.52 | 67.11 | 0.00 | --- | --- | PEAK | 2 | 15660.00 | 56.39 | 74.00 | -17.61 | 61.24 | 40.20 | 19.12 | 64.17 | 0.00 | 101 | 344 | PEAK | 3 | 15660.00 | 43.47 | 54.00 | -10.53 | 48.33 | 40.19 | 19.12 | 64.17 | 0.00 | 101 | 344 | AVERAGE |
| Limit    | Read  | Ant      | Cable  | Preamp | Aux    | APos   | TPos   | Remark |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |       |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| Freq     | Level   | Line     | Margin | Level  | Factor | Loss   | Factor | Factor |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |       |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| MHz      | dBuV/m  | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB     | cm     | deg  |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |       |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| 1        | 10444.10  | 51.33    | 68.30  | -16.97 | 65.40  | 37.51  | 15.53  | 67.11  | 0.00 | ---    | ---  | PEAK    |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |       |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| 2        | 15660.00  | 53.53    | 74.00  | -20.47 | 58.38  | 40.20  | 19.12  | 64.17  | 0.00 | 107    | 19   | PEAK    |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |       |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| 3        | 15660.00  | 40.86    | 54.00  | -13.14 | 45.72  | 40.19  | 19.12  | 64.17  | 0.00 | 107    | 19   | AVERAGE |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |       |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| Limit    | Read  | Ant      | Cable  | Preamp | Aux    | APos   | TPos   | Remark |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |       |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| Freq     | Level   | Line     | Margin | Level  | Factor | Loss   | Factor | Factor |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |       |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| MHz      | dBuV/m  | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB     | cm     | deg  |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |       |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| 1        | 10436.40  | 59.02    | 68.30  | -9.28  | 73.10  | 37.51  | 15.52  | 67.11  | 0.00 | ---    | ---  | PEAK    |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |       |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| 2        | 15660.00  | 56.39    | 74.00  | -17.61 | 61.24  | 40.20  | 19.12  | 64.17  | 0.00 | 101    | 344  | PEAK    |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |       |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| 3        | 15660.00  | 43.47    | 54.00  | -10.53 | 48.33  | 40.19  | 19.12  | 64.17  | 0.00 | 101    | 344  | AVERAGE |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |       |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |



| Mode     | 3   |          |        |        |        |        |        |        |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |       |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |
|----------|---|----------|--------|--------|--------|--------|--------|--------|------|--------|------|---------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|----|---------|---|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|----|-----|---|----------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|----------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|
|          | Harmonic  |          |        |        |        |        |        |        |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |       |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |
|          | U-NII-1_5.15-5.25_802.11a_CH48_5240MHz  |          |        |        |        |        |        |        |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |       |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |
| ANT      | CDD 4+5   |          |        |        |        |        |        |        |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |       |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |
| Pol.     | Horizontal  | Vertical |        |        |        |        |        |        |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |       |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10481.50</td> <td>52.89</td> <td>68.30</td> <td>-15.41</td> <td>66.89</td> <td>37.54</td> <td>15.56</td> <td>67.10</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>52.99</td> <td>74.00</td> <td>-21.01</td> <td>57.75</td> <td>40.25</td> <td>19.16</td> <td>64.17</td> <td>0.00</td> <td>101</td> <td>25</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15720.00</td> <td>40.86</td> <td>54.00</td> <td>-13.14</td> <td>45.62</td> <td>40.25</td> <td>19.16</td> <td>64.17</td> <td>0.00</td> <td>101</td> <td>25</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit    | Read   | Ant    | Cable  | Preamp | Aux    | APos   | TPos | Remark | Freq | Level   | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 10481.50 | 52.89 | 68.30 | -15.41 | 66.89 | 37.54 | 15.56 | 67.10 | 0.00 | --- | --- | PEAK | 2 | 15720.00 | 52.99 | 74.00 | -21.01 | 57.75 | 40.25 | 19.16 | 64.17 | 0.00 | 101 | 25 | PEAK | 3 | 15720.00 | 40.86 | 54.00 | -13.14 | 45.62 | 40.25 | 19.16 | 64.17 | 0.00 | 101 | 25 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10485.90</td> <td>59.30</td> <td>68.30</td> <td>-9.00</td> <td>73.28</td> <td>37.54</td> <td>15.57</td> <td>67.09</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>56.95</td> <td>74.00</td> <td>-17.05</td> <td>61.71</td> <td>40.25</td> <td>19.16</td> <td>64.17</td> <td>0.00</td> <td>100</td> <td>340</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15720.00</td> <td>44.12</td> <td>54.00</td> <td>-9.88</td> <td>48.88</td> <td>40.25</td> <td>19.16</td> <td>64.17</td> <td>0.00</td> <td>100</td> <td>340</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | 1 | 10485.90 | 59.30 | 68.30 | -9.00 | 73.28 | 37.54 | 15.57 | 67.09 | 0.00 | --- | --- | PEAK | 2 | 15720.00 | 56.95 | 74.00 | -17.05 | 61.71 | 40.25 | 19.16 | 64.17 | 0.00 | 100 | 340 | PEAK | 3 | 15720.00 | 44.12 | 54.00 | -9.88 | 48.88 | 40.25 | 19.16 | 64.17 | 0.00 | 100 | 340 | AVERAGE |
| Limit    | Read  | Ant      | Cable  | Preamp | Aux    | APos   | TPos   | Remark |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |       |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |
| Freq     | Level   | Line     | Margin | Level  | Factor | Loss   | Factor | Factor |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |       |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |
| MHz      | dBuV/m  | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB     | cm     | deg  |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |       |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |
| 1        | 10481.50  | 52.89    | 68.30  | -15.41 | 66.89  | 37.54  | 15.56  | 67.10  | 0.00 | ---    | ---  | PEAK    |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |       |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |
| 2        | 15720.00  | 52.99    | 74.00  | -21.01 | 57.75  | 40.25  | 19.16  | 64.17  | 0.00 | 101    | 25   | PEAK    |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |       |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |
| 3        | 15720.00  | 40.86    | 54.00  | -13.14 | 45.62  | 40.25  | 19.16  | 64.17  | 0.00 | 101    | 25   | AVERAGE |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |       |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |
| Limit    | Read  | Ant      | Cable  | Preamp | Aux    | APos   | TPos   | Remark |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |       |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |
| Freq     | Level   | Line     | Margin | Level  | Factor | Loss   | Factor | Factor |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |       |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |
| MHz      | dBuV/m  | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB     | dB     | cm   | deg    |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |       |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |
| 1        | 10485.90  | 59.30    | 68.30  | -9.00  | 73.28  | 37.54  | 15.57  | 67.09  | 0.00 | ---    | ---  | PEAK    |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |       |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |
| 2        | 15720.00  | 56.95    | 74.00  | -17.05 | 61.71  | 40.25  | 19.16  | 64.17  | 0.00 | 100    | 340  | PEAK    |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |       |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |
| 3        | 15720.00  | 44.12    | 54.00  | -9.88  | 48.88  | 40.25  | 19.16  | 64.17  | 0.00 | 100    | 340  | AVERAGE |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |       |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |







| Mode     | 4  |          |        |        |        |        |        |        |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
|----------|--|----------|--------|--------|--------|--------|--------|--------|------|--------|------|---------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|----|---------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|
|          | Harmonic   |          |        |        |        |        |        |        |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
|          | U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz  |          |        |        |        |        |        |        |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| ANT      | CDD 4+5  |          |        |        |        |        |        |        |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| Pol.     | Horizontal   | Vertical |        |        |        |        |        |        |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10513.40</td> <td>51.94</td> <td>68.30</td> <td>-16.36</td> <td>65.87</td> <td>37.56</td> <td>15.59</td> <td>67.08</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15780.00</td> <td>53.71</td> <td>74.00</td> <td>-20.29</td> <td>58.38</td> <td>40.30</td> <td>19.20</td> <td>64.17</td> <td>0.00</td> <td>100</td> <td>35</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15780.00</td> <td>40.11</td> <td>54.00</td> <td>-13.89</td> <td>44.77</td> <td>40.31</td> <td>19.20</td> <td>64.17</td> <td>0.00</td> <td>100</td> <td>35</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit    | Read   | Ant    | Cable  | Preamp | Aux    | APos   | TPos | Remark | Freq | Level   | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 | 10513.40 | 51.94 | 68.30 | -16.36 | 65.87 | 37.56 | 15.59 | 67.08 | 0.00 | --- | --- | PEAK | 2 | 15780.00 | 53.71 | 74.00 | -20.29 | 58.38 | 40.30 | 19.20 | 64.17 | 0.00 | 100 | 35 | PEAK | 3 | 15780.00 | 40.11 | 54.00 | -13.89 | 44.77 | 40.31 | 19.20 | 64.17 | 0.00 | 100 | 35 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10523.30</td> <td>56.15</td> <td>68.30</td> <td>-12.15</td> <td>70.06</td> <td>37.57</td> <td>15.60</td> <td>67.08</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15780.00</td> <td>55.67</td> <td>74.00</td> <td>-18.33</td> <td>60.34</td> <td>40.30</td> <td>19.20</td> <td>64.17</td> <td>0.00</td> <td>101</td> <td>339</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15780.00</td> <td>43.20</td> <td>54.00</td> <td>-10.80</td> <td>47.87</td> <td>40.30</td> <td>19.20</td> <td>64.17</td> <td>0.00</td> <td>101</td> <td>339</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 | 10523.30 | 56.15 | 68.30 | -12.15 | 70.06 | 37.57 | 15.60 | 67.08 | 0.00 | --- | --- | PEAK | 2 | 15780.00 | 55.67 | 74.00 | -18.33 | 60.34 | 40.30 | 19.20 | 64.17 | 0.00 | 101 | 339 | PEAK | 3 | 15780.00 | 43.20 | 54.00 | -10.80 | 47.87 | 40.30 | 19.20 | 64.17 | 0.00 | 101 | 339 | AVERAGE |
| Limit    | Read   | Ant      | Cable  | Preamp | Aux    | APos   | TPos   | Remark |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| Freq     | Level  | Line     | Margin | Level  | Factor | Loss   | Factor | Factor |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| MHz      | dBuV/m   | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB     | dB     |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| 1        | 10513.40   | 51.94    | 68.30  | -16.36 | 65.87  | 37.56  | 15.59  | 67.08  | 0.00 | ---    | ---  | PEAK    |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| 2        | 15780.00   | 53.71    | 74.00  | -20.29 | 58.38  | 40.30  | 19.20  | 64.17  | 0.00 | 100    | 35   | PEAK    |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| 3        | 15780.00   | 40.11    | 54.00  | -13.89 | 44.77  | 40.31  | 19.20  | 64.17  | 0.00 | 100    | 35   | AVERAGE |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| Limit    | Read   | Ant      | Cable  | Preamp | Aux    | APos   | TPos   | Remark |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| Freq     | Level  | Line     | Margin | Level  | Factor | Loss   | Factor | Factor |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| MHz      | dBuV/m   | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB     | dB     |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| 1        | 10523.30   | 56.15    | 68.30  | -12.15 | 70.06  | 37.57  | 15.60  | 67.08  | 0.00 | ---    | ---  | PEAK    |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| 2        | 15780.00   | 55.67    | 74.00  | -18.33 | 60.34  | 40.30  | 19.20  | 64.17  | 0.00 | 101    | 339  | PEAK    |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| 3        | 15780.00   | 43.20    | 54.00  | -10.80 | 47.87  | 40.30  | 19.20  | 64.17  | 0.00 | 101    | 339  | AVERAGE |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |



| Mode     | 5   |          |        |        |        |        |        |        |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
|----------|---|----------|--------|--------|--------|--------|--------|--------|------|--------|------|---------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|----------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|
|          | Harmonic  |          |        |        |        |        |        |        |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
|          | U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz   |          |        |        |        |        |        |        |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| ANT      | CDD 4+5   |          |        |        |        |        |        |        |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| Pol.     | Horizontal  | Vertical |        |        |        |        |        |        |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.01</td> <td>52.13</td> <td>74.00</td> <td>-21.87</td> <td>65.89</td> <td>37.62</td> <td>15.67</td> <td>67.05</td> <td>0.00</td> <td>103</td> <td>294</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>10600.01</td> <td>41.74</td> <td>54.00</td> <td>-12.26</td> <td>55.50</td> <td>37.62</td> <td>15.67</td> <td>67.05</td> <td>0.00</td> <td>103</td> <td>294</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>15892.40</td> <td>50.44</td> <td>74.00</td> <td>-23.56</td> <td>54.93</td> <td>40.41</td> <td>19.28</td> <td>64.18</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table> | Limit    | Read   | Ant    | Cable  | Preamp | Aux    | APos   | TPos | Remark | Freq | Level   | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 10600.01 | 52.13 | 74.00 | -21.87 | 65.89 | 37.62 | 15.67 | 67.05 | 0.00 | 103 | 294 | PEAK | 2 | 10600.01 | 41.74 | 54.00 | -12.26 | 55.50 | 37.62 | 15.67 | 67.05 | 0.00 | 103 | 294 | AVERAGE | 3 | 15892.40 | 50.44 | 74.00 | -23.56 | 54.93 | 40.41 | 19.28 | 64.18 | 0.00 | --- | --- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.01</td> <td>59.85</td> <td>74.00</td> <td>-14.15</td> <td>73.61</td> <td>37.62</td> <td>15.67</td> <td>67.05</td> <td>0.00</td> <td>101</td> <td>116</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>10600.01</td> <td>48.65</td> <td>54.00</td> <td>-5.35</td> <td>62.41</td> <td>37.62</td> <td>15.67</td> <td>67.05</td> <td>0.00</td> <td>101</td> <td>116</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>15900.00</td> <td>56.74</td> <td>74.00</td> <td>-17.26</td> <td>61.23</td> <td>40.41</td> <td>19.28</td> <td>64.18</td> <td>0.00</td> <td>100</td> <td>342</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>15900.00</td> <td>42.64</td> <td>54.00</td> <td>-11.36</td> <td>47.12</td> <td>40.42</td> <td>19.28</td> <td>64.18</td> <td>0.00</td> <td>100</td> <td>342</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 10600.01 | 59.85 | 74.00 | -14.15 | 73.61 | 37.62 | 15.67 | 67.05 | 0.00 | 101 | 116 | PEAK | 2 | 10600.01 | 48.65 | 54.00 | -5.35 | 62.41 | 37.62 | 15.67 | 67.05 | 0.00 | 101 | 116 | AVERAGE | 3 | 15900.00 | 56.74 | 74.00 | -17.26 | 61.23 | 40.41 | 19.28 | 64.18 | 0.00 | 100 | 342 | PEAK | 4 | 15900.00 | 42.64 | 54.00 | -11.36 | 47.12 | 40.42 | 19.28 | 64.18 | 0.00 | 100 | 342 | AVERAGE |
| Limit    | Read  | Ant      | Cable  | Preamp | Aux    | APos   | TPos   | Remark |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| Freq     | Level   | Line     | Margin | Level  | Factor | Loss   | Factor | Factor |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| MHz      | dBuV/m  | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB     | cm     | deg  |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| 1        | 10600.01  | 52.13    | 74.00  | -21.87 | 65.89  | 37.62  | 15.67  | 67.05  | 0.00 | 103    | 294  | PEAK    |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| 2        | 10600.01  | 41.74    | 54.00  | -12.26 | 55.50  | 37.62  | 15.67  | 67.05  | 0.00 | 103    | 294  | AVERAGE |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| 3        | 15892.40  | 50.44    | 74.00  | -23.56 | 54.93  | 40.41  | 19.28  | 64.18  | 0.00 | ---    | ---  | Peak    |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| Limit    | Read  | Ant      | Cable  | Preamp | Aux    | APos   | TPos   | Remark |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| Freq     | Level   | Line     | Margin | Level  | Factor | Loss   | Factor | Factor |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| MHz      | dBuV/m  | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB     | cm     | deg  |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| 1        | 10600.01  | 59.85    | 74.00  | -14.15 | 73.61  | 37.62  | 15.67  | 67.05  | 0.00 | 101    | 116  | PEAK    |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| 2        | 10600.01  | 48.65    | 54.00  | -5.35  | 62.41  | 37.62  | 15.67  | 67.05  | 0.00 | 101    | 116  | AVERAGE |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| 3        | 15900.00  | 56.74    | 74.00  | -17.26 | 61.23  | 40.41  | 19.28  | 64.18  | 0.00 | 100    | 342  | PEAK    |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| 4        | 15900.00  | 42.64    | 54.00  | -11.36 | 47.12  | 40.42  | 19.28  | 64.18  | 0.00 | 100    | 342  | AVERAGE |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |

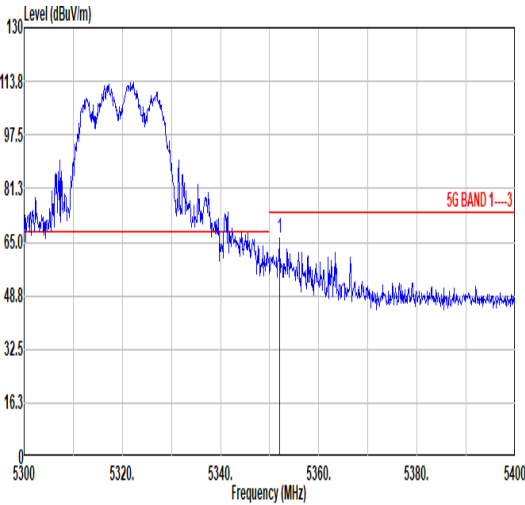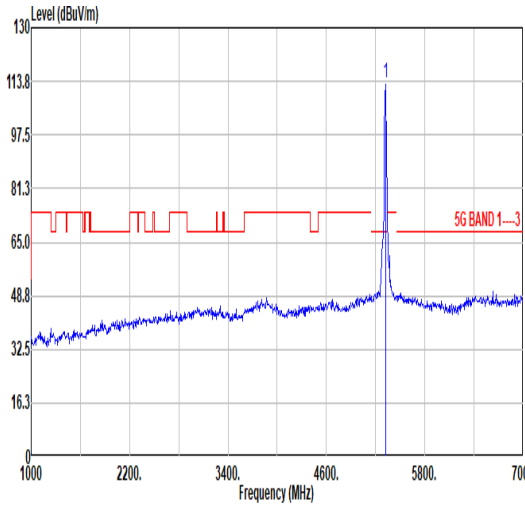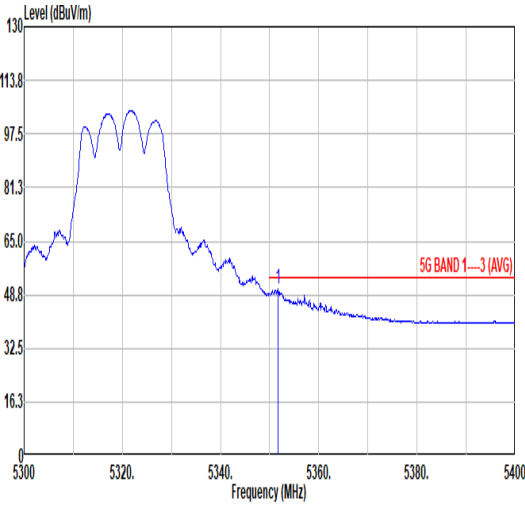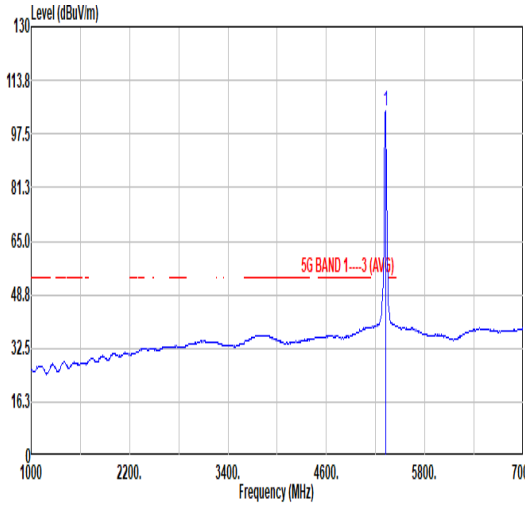

|       |   | 6                                       |        |        |        |        |        |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
|-------|---|---|--------|--------|--------|--------|--------|-------|------|------|-------|---------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|---|---------|-------|-------|-------|-------|-------|-------|-------|------|-----|----|---------|--|-------|------|-----|-------|--------|-----|------|------|------|-------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|---|---------|--------|-------|-------|--------|-------|-------|-------|------|-----|----|---------|
| Mode  |   | Band Edge - L                           |        |        |        |        |        |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
|       |   | U-NII-2A_5.25-5.35_802.11a_CH64_5320MHZ |        |        |        |        |        |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| ANT   |   | CDD 4+5                                 |        |        |        |        |        |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Pol.  | Horizontal  | Fundamental                             |        |        |        |        |        |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Peak  |  <p>Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a signal between 5300 and 5400 MHz. A red horizontal line indicates the 5G BAND 1-3 limit at approximately 74.00 dBuV/m. A peak is observed at 5352.00 MHz with a level of 66.35 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5352.00</td> <td>66.35</td> <td>74.00</td> <td>-7.65</td> <td>57.74</td> <td>34.53</td> <td>10.75</td> <td>36.67</td> <td>0.00</td> <td>102</td> <td>71</td> <td>PEAK</td> </tr> </tbody> </table>     | Limit                                   | Read   | Ant    | Cable  | Preamp | Aux    | APos  | TPos | Freq | Level | Line    | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 5352.00 | 66.35 | 74.00 | -7.65 | 57.74 | 34.53 | 10.75 | 36.67 | 0.00 | 102 | 71 | PEAK    |  <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. The plot shows a signal between 1000 and 7000 MHz. A red horizontal line indicates the 5G BAND 1-3 limit at approximately 74.00 dBuV/m. A sharp peak is observed at 5320.00 MHz with a level of 113.43 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>113.43</td> <td>68.30</td> <td>45.13</td> <td>104.95</td> <td>34.48</td> <td>10.73</td> <td>36.73</td> <td>0.00</td> <td>102</td> <td>71</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 5320.00 | 113.43 | 68.30 | 45.13 | 104.95 | 34.48 | 10.73 | 36.73 | 0.00 | 102 | 71 | PEAK    |
|       | Limit   | Read                                    | Ant    | Cable  | Preamp | Aux    | APos   | TPos  |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Freq  | Level   | Line                                    | Margin | Level  | Factor | Loss   | Factor |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| MHz   | dBuV/m  | dBuV/m                                  | dB     | dBuV   | dB/m   | dB     | dB     |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| 1     | 5352.00   | 66.35                                   | 74.00  | -7.65  | 57.74  | 34.53  | 10.75  | 36.67 | 0.00 | 102  | 71    | PEAK    |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Limit | Read  | Ant                                     | Cable  | Preamp | Aux    | APos   | TPos   |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Freq  | Level   | Line                                    | Margin | Level  | Factor | Loss   | Factor |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| MHz   | dBuV/m  | dBuV/m                                  | dB     | dBuV   | dB/m   | dB     | dB     |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| 1     | 5320.00   | 113.43                                  | 68.30  | 45.13  | 104.95 | 34.48  | 10.73  | 36.73 | 0.00 | 102  | 71    | PEAK    |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Avg   |  <p>Level (dBuV/m) vs Frequency (MHz) for Average Horizontal polarization. The plot shows a signal between 5300 and 5400 MHz. A red horizontal line indicates the 5G BAND 1-3 (AVG) limit at approximately 74.00 dBuV/m. The average level at 5351.70 MHz is 50.30 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5351.70</td> <td>50.30</td> <td>74.00</td> <td>-3.70</td> <td>41.70</td> <td>34.52</td> <td>10.75</td> <td>36.67</td> <td>0.00</td> <td>102</td> <td>71</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit                                   | Read   | Ant    | Cable  | Preamp | Aux    | APos  | TPos | Freq | Level | Line    | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 5351.70 | 50.30 | 74.00 | -3.70 | 41.70 | 34.52 | 10.75 | 36.67 | 0.00 | 102 | 71 | AVERAGE |  <p>Level (dBuV/m) vs Frequency (MHz) for Average Fundamental polarization. The plot shows a signal between 1000 and 7000 MHz. A red horizontal line indicates the 5G BAND 1-3 (AVG) limit at approximately 74.00 dBuV/m. The average level at 5320.00 MHz is 104.58 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>104.58</td> <td>68.30</td> <td>36.28</td> <td>96.10</td> <td>34.48</td> <td>10.73</td> <td>36.73</td> <td>0.00</td> <td>102</td> <td>71</td> <td>AVERAGE</td> </tr> </tbody> </table>    | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 5320.00 | 104.58 | 68.30 | 36.28 | 96.10  | 34.48 | 10.73 | 36.73 | 0.00 | 102 | 71 | AVERAGE |
|       | Limit   | Read                                    | Ant    | Cable  | Preamp | Aux    | APos   | TPos  |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Freq  | Level   | Line                                    | Margin | Level  | Factor | Loss   | Factor |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| MHz   | dBuV/m  | dBuV/m                                  | dB     | dBuV   | dB/m   | dB     | dB     |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| 1     | 5351.70   | 50.30                                   | 74.00  | -3.70  | 41.70  | 34.52  | 10.75  | 36.67 | 0.00 | 102  | 71    | AVERAGE |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Limit | Read  | Ant                                     | Cable  | Preamp | Aux    | APos   | TPos   |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Freq  | Level   | Line                                    | Margin | Level  | Factor | Loss   | Factor |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| MHz   | dBuV/m  | dBuV/m                                  | dB     | dBuV   | dB/m   | dB     | dB     |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| 1     | 5320.00   | 104.58                                  | 68.30  | 36.28  | 96.10  | 34.48  | 10.73  | 36.73 | 0.00 | 102  | 71    | AVERAGE |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |



| Mode  | 6   |             |        |        |        |        |        |        |        |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
|-------|---|-------------|--------|--------|--------|--------|--------|--------|--------|--------|------|---------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|---|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|
|       | Band Edge - L   |             |        |        |        |        |        |        |        |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
|       | U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz   |             |        |        |        |        |        |        |        |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| ANT   | CDD 4+5   |             |        |        |        |        |        |        |        |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Pol.  | Vertical  | Fundamental |        |        |        |        |        |        |        |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Peak  | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5352.60</td> <td>60.49</td> <td>74.00</td> <td>-13.51</td> <td>51.88</td> <td>34.53</td> <td>10.75</td> <td>36.67</td> <td>0.00</td> <td>395</td> <td>238</td> <td>PEAK</td> </tr> </tbody> </table>    | Limit       | Read   | Ant    | Cable  | Preamp | Aux    | APos   | TPos   | Remark | Freq | Level   | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 | 5352.60 | 60.49 | 74.00 | -13.51 | 51.88 | 34.53 | 10.75 | 36.67 | 0.00 | 395 | 238 | PEAK    | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>107.34</td> <td>68.30</td> <td>39.04</td> <td>98.84</td> <td>34.49</td> <td>10.73</td> <td>36.72</td> <td>0.00</td> <td>395</td> <td>238</td> <td>PEAK</td> </tr> </tbody> </table>    | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 | 5320.00 | 107.34 | 68.30 | 39.04 | 98.84 | 34.49 | 10.73 | 36.72 | 0.00 | 395 | 238 | PEAK    |
|       | Limit   | Read        | Ant    | Cable  | Preamp | Aux    | APos   | TPos   | Remark |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Freq  | Level   | Line        | Margin | Level  | Factor | Loss   | Factor | Factor |        |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| MHz   | dBuV/m  | dBuV/m      | dB     | dBuV   | dB/m   | dB     | dB     | dB     |        |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| 1     | 5352.60   | 60.49       | 74.00  | -13.51 | 51.88  | 34.53  | 10.75  | 36.67  | 0.00   | 395    | 238  | PEAK    |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Limit | Read  | Ant         | Cable  | Preamp | Aux    | APos   | TPos   | Remark |        |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Freq  | Level   | Line        | Margin | Level  | Factor | Loss   | Factor | Factor |        |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| MHz   | dBuV/m  | dBuV/m      | dB     | dBuV   | dB/m   | dB     | dB     | dB     |        |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| 1     | 5320.00   | 107.34      | 68.30  | 39.04  | 98.84  | 34.49  | 10.73  | 36.72  | 0.00   | 395    | 238  | PEAK    |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Avg   | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5352.30</td> <td>43.29</td> <td>54.00</td> <td>-10.71</td> <td>34.68</td> <td>34.53</td> <td>10.75</td> <td>36.67</td> <td>0.00</td> <td>395</td> <td>238</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit       | Read   | Ant    | Cable  | Preamp | Aux    | APos   | TPos   | Remark | Freq | Level   | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 | 5352.30 | 43.29 | 54.00 | -10.71 | 34.68 | 34.53 | 10.75 | 36.67 | 0.00 | 395 | 238 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>100.17</td> <td>68.30</td> <td>31.87</td> <td>91.69</td> <td>34.48</td> <td>10.73</td> <td>36.73</td> <td>0.00</td> <td>395</td> <td>238</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 | 5320.00 | 100.17 | 68.30 | 31.87 | 91.69 | 34.48 | 10.73 | 36.73 | 0.00 | 395 | 238 | AVERAGE |
| Limit | Read  | Ant         | Cable  | Preamp | Aux    | APos   | TPos   | Remark |        |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Freq  | Level   | Line        | Margin | Level  | Factor | Loss   | Factor | Factor |        |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| MHz   | dBuV/m  | dBuV/m      | dB     | dBuV   | dB/m   | dB     | dB     | dB     |        |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| 1     | 5352.30   | 43.29       | 54.00  | -10.71 | 34.68  | 34.53  | 10.75  | 36.67  | 0.00   | 395    | 238  | AVERAGE |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Limit | Read  | Ant         | Cable  | Preamp | Aux    | APos   | TPos   | Remark |        |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Freq  | Level   | Line        | Margin | Level  | Factor | Loss   | Factor | Factor |        |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| MHz   | dBuV/m  | dBuV/m      | dB     | dBuV   | dB/m   | dB     | dB     | dB     |        |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| 1     | 5320.00   | 100.17      | 68.30  | 31.87  | 91.69  | 34.48  | 10.73  | 36.73  | 0.00   | 395    | 238  | AVERAGE |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |



| Mode        | 6  |             |        |        |             |        |        |      |        |      |         |      |       |             |       |        |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |    |      |            |       |       |        |       |       |       |       |      |     |    |         |   |  |       |      |     |       |        |     |      |      |        |      |       |             |       |        |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |       |       |       |       |       |      |     |     |         |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
|-------------|--|-------------|--------|--------|-------------|--------|--------|------|--------|------|---------|------|-------|-------------|-------|--------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|----|------|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|----|---------|---|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|-------|--------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|------------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|
|             | Harmonic   |             |        |        |             |        |        |      |        |      |         |      |       |             |       |        |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |    |      |            |       |       |        |       |       |       |       |      |     |    |         |   |  |       |      |     |       |        |     |      |      |        |      |       |             |       |        |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |       |       |       |       |       |      |     |     |         |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
|             | U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz  |             |        |        |             |        |        |      |        |      |         |      |       |             |       |        |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |    |      |            |       |       |        |       |       |       |       |      |     |    |         |   |  |       |      |     |       |        |     |      |      |        |      |       |             |       |        |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |       |       |       |       |       |      |     |     |         |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
| ANT         | CDD 4+5  |             |        |        |             |        |        |      |        |      |         |      |       |             |       |        |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |    |      |            |       |       |        |       |       |       |       |      |     |    |         |   |  |       |      |     |       |        |     |      |      |        |      |       |             |       |        |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |       |       |       |       |       |      |     |     |         |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
| Pol.        | Horizontal   | Vertical    |        |        |             |        |        |      |        |      |         |      |       |             |       |        |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |    |      |            |       |       |        |       |       |       |       |      |     |    |         |   |  |       |      |     |       |        |     |      |      |        |      |       |             |       |        |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |       |       |       |       |       |      |     |     |         |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
| Peak<br>Avg |  |             |        |        |             |        |        |      |        |      |         |      |       |             |       |        |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |    |      |            |       |       |        |       |       |       |       |      |     |    |         |   |  |       |      |     |       |        |     |      |      |        |      |       |             |       |        |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |       |       |       |       |       |      |     |     |         |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
|             | <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10640.00</td> <td>45.67</td> <td>74.00</td> <td>-28.33</td> <td>59.35</td> <td>37.65</td> <td>15.71</td> <td>67.04</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2 15960.00</td> <td>49.80</td> <td>74.00</td> <td>-24.20</td> <td>54.19</td> <td>40.47</td> <td>19.32</td> <td>64.18</td> <td>0.00</td> <td>101</td> <td>26</td> <td>PEAK</td> </tr> <tr> <td>3 15960.00</td> <td>37.86</td> <td>54.00</td> <td>-16.14</td> <td>42.25</td> <td>40.47</td> <td>19.32</td> <td>64.18</td> <td>0.00</td> <td>101</td> <td>26</td> <td>AVERAGE</td> </tr> </tbody> </table> |             | Limit  | Read   | Ant         | Cable  | Preamp | Aux  | APos   | TPos | Remark  | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor |  |  |  | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 10640.00 | 45.67 | 74.00 | -28.33 | 59.35 | 37.65 | 15.71 | 67.04 | 0.00 | --- | --- | PEAK | 2 15960.00 | 49.80 | 74.00 | -24.20 | 54.19 | 40.47 | 19.32 | 64.18 | 0.00 | 101 | 26 | PEAK | 3 15960.00 | 37.86 | 54.00 | -16.14 | 42.25 | 40.47 | 19.32 | 64.18 | 0.00 | 101 | 26 | AVERAGE | <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10640.00</td> <td>60.80</td> <td>74.00</td> <td>-13.20</td> <td>74.48</td> <td>37.65</td> <td>15.71</td> <td>67.04</td> <td>0.00</td> <td>100</td> <td>118</td> <td>PEAK</td> </tr> <tr> <td>2 10640.00</td> <td>48.07</td> <td>54.00</td> <td>-5.93</td> <td>61.75</td> <td>37.65</td> <td>15.71</td> <td>67.04</td> <td>0.00</td> <td>100</td> <td>118</td> <td>AVERAGE</td> </tr> <tr> <td>3 15960.00</td> <td>54.64</td> <td>74.00</td> <td>-19.36</td> <td>59.03</td> <td>40.47</td> <td>19.32</td> <td>64.18</td> <td>0.00</td> <td>105</td> <td>334</td> <td>PEAK</td> </tr> <tr> <td>4 15960.00</td> <td>39.47</td> <td>54.00</td> <td>-14.53</td> <td>43.86</td> <td>40.47</td> <td>19.32</td> <td>64.18</td> <td>0.00</td> <td>105</td> <td>334</td> <td>AVERAGE</td> </tr> </tbody> </table> |  | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor |  |  |  | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 10640.00 | 60.80 | 74.00 | -13.20 | 74.48 | 37.65 | 15.71 | 67.04 | 0.00 | 100 | 118 | PEAK | 2 10640.00 | 48.07 | 54.00 | -5.93 | 61.75 | 37.65 | 15.71 | 67.04 | 0.00 | 100 | 118 | AVERAGE | 3 15960.00 | 54.64 | 74.00 | -19.36 | 59.03 | 40.47 | 19.32 | 64.18 | 0.00 | 105 | 334 | PEAK | 4 15960.00 | 39.47 | 54.00 | -14.53 | 43.86 | 40.47 | 19.32 | 64.18 | 0.00 | 105 | 334 |
|             | Limit  | Read        | Ant    | Cable  | Preamp      | Aux    | APos   | TPos | Remark |      |         |      |       |             |       |        |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |    |      |            |       |       |        |       |       |       |       |      |     |    |         |   |  |       |      |     |       |        |     |      |      |        |      |       |             |       |        |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |       |       |       |       |       |      |     |     |         |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
| Freq        | Level  | Line Margin | Level  | Factor | Loss Factor | Factor |        |      |        |      |         |      |       |             |       |        |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |    |      |            |       |       |        |       |       |       |       |      |     |    |         |   |  |       |      |     |       |        |     |      |      |        |      |       |             |       |        |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |       |       |       |       |       |      |     |     |         |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
| MHz         | dBuV/m   | dBuV/m      | dB     | dBuV   | dB/m        | dB     | dB     | cm   | deg    |      |         |      |       |             |       |        |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |    |      |            |       |       |        |       |       |       |       |      |     |    |         |   |  |       |      |     |       |        |     |      |      |        |      |       |             |       |        |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |       |       |       |       |       |      |     |     |         |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
| 1 10640.00  | 45.67  | 74.00       | -28.33 | 59.35  | 37.65       | 15.71  | 67.04  | 0.00 | ---    | ---  | PEAK    |      |       |             |       |        |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |    |      |            |       |       |        |       |       |       |       |      |     |    |         |   |  |       |      |     |       |        |     |      |      |        |      |       |             |       |        |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |       |       |       |       |       |      |     |     |         |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
| 2 15960.00  | 49.80  | 74.00       | -24.20 | 54.19  | 40.47       | 19.32  | 64.18  | 0.00 | 101    | 26   | PEAK    |      |       |             |       |        |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |    |      |            |       |       |        |       |       |       |       |      |     |    |         |   |  |       |      |     |       |        |     |      |      |        |      |       |             |       |        |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |       |       |       |       |       |      |     |     |         |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
| 3 15960.00  | 37.86  | 54.00       | -16.14 | 42.25  | 40.47       | 19.32  | 64.18  | 0.00 | 101    | 26   | AVERAGE |      |       |             |       |        |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |    |      |            |       |       |        |       |       |       |       |      |     |    |         |   |  |       |      |     |       |        |     |      |      |        |      |       |             |       |        |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |       |       |       |       |       |      |     |     |         |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
|             | Limit  | Read        | Ant    | Cable  | Preamp      | Aux    | APos   | TPos | Remark |      |         |      |       |             |       |        |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |    |      |            |       |       |        |       |       |       |       |      |     |    |         |   |  |       |      |     |       |        |     |      |      |        |      |       |             |       |        |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |       |       |       |       |       |      |     |     |         |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
| Freq        | Level  | Line Margin | Level  | Factor | Loss Factor | Factor |        |      |        |      |         |      |       |             |       |        |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |    |      |            |       |       |        |       |       |       |       |      |     |    |         |   |  |       |      |     |       |        |     |      |      |        |      |       |             |       |        |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |       |       |       |       |       |      |     |     |         |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
| MHz         | dBuV/m   | dBuV/m      | dB     | dBuV   | dB/m        | dB     | dB     | cm   | deg    |      |         |      |       |             |       |        |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |    |      |            |       |       |        |       |       |       |       |      |     |    |         |   |  |       |      |     |       |        |     |      |      |        |      |       |             |       |        |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |       |       |       |       |       |      |     |     |         |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
| 1 10640.00  | 60.80  | 74.00       | -13.20 | 74.48  | 37.65       | 15.71  | 67.04  | 0.00 | 100    | 118  | PEAK    |      |       |             |       |        |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |    |      |            |       |       |        |       |       |       |       |      |     |    |         |   |  |       |      |     |       |        |     |      |      |        |      |       |             |       |        |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |       |       |       |       |       |      |     |     |         |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
| 2 10640.00  | 48.07  | 54.00       | -5.93  | 61.75  | 37.65       | 15.71  | 67.04  | 0.00 | 100    | 118  | AVERAGE |      |       |             |       |        |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |    |      |            |       |       |        |       |       |       |       |      |     |    |         |   |  |       |      |     |       |        |     |      |      |        |      |       |             |       |        |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |       |       |       |       |       |      |     |     |         |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
| 3 15960.00  | 54.64  | 74.00       | -19.36 | 59.03  | 40.47       | 19.32  | 64.18  | 0.00 | 105    | 334  | PEAK    |      |       |             |       |        |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |    |      |            |       |       |        |       |       |       |       |      |     |    |         |   |  |       |      |     |       |        |     |      |      |        |      |       |             |       |        |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |       |       |       |       |       |      |     |     |         |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
| 4 15960.00  | 39.47  | 54.00       | -14.53 | 43.86  | 40.47       | 19.32  | 64.18  | 0.00 | 105    | 334  | AVERAGE |      |       |             |       |        |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |    |      |            |       |       |        |       |       |       |       |      |     |    |         |   |  |       |      |     |       |        |     |      |      |        |      |       |             |       |        |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |       |       |       |       |       |      |     |     |         |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |



|       |   | 7           |              |             |             |        |       |        |        |        |      |         |             |              |             |             |        |  |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |         |       |       |       |        |       |       |       |        |      |       |             |   |             |             |        |       |        |     |        |        |        |      |       |             |              |             |             |        |         |        |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |        |       |       |       |      |     |    |      |
|-------|---|-------------|--------------|-------------|-------------|--------|-------|--------|--------|--------|------|---------|-------------|--------------|-------------|-------------|--------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|----|---------|---|---------|-------|-------|-------|--------|-------|-------|-------|--------|------|-------|-------------|---|-------------|-------------|--------|-------|--------|-----|--------|--------|--------|------|-------|-------------|--------------|-------------|-------------|--------|---------|--------|-------|--------|--------|-------|-------|-------|------|-----|----|---------|---|---------|--------|-------|-------|--------|-------|-------|-------|------|-----|----|------|
| Mode  | Band Edge   |             |              |             |             |        |       |        |        |        |      |         |             |              |             |             |        |  |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |         |       |       |       |        |       |       |       |        |      |       |             |   |             |             |        |       |        |     |        |        |        |      |       |             |              |             |             |        |         |        |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |        |       |       |       |      |     |    |      |
|       | U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz   |             |              |             |             |        |       |        |        |        |      |         |             |              |             |             |        |  |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |         |       |       |       |        |       |       |       |        |      |       |             |   |             |             |        |       |        |     |        |        |        |      |       |             |              |             |             |        |         |        |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |        |       |       |       |      |     |    |      |
| ANT   | CDD 4+5   |             |              |             |             |        |       |        |        |        |      |         |             |              |             |             |        |  |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |         |       |       |       |        |       |       |       |        |      |       |             |   |             |             |        |       |        |     |        |        |        |      |       |             |              |             |             |        |         |        |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |        |       |       |       |      |     |    |      |
| Pol.  | Horizontal  | Fundamental |              |             |             |        |       |        |        |        |      |         |             |              |             |             |        |  |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |         |       |       |       |        |       |       |       |        |      |       |             |   |             |             |        |       |        |     |        |        |        |      |       |             |              |             |             |        |         |        |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |        |       |       |       |      |     |    |      |
| Peak  | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.44</td> <td>54.15</td> <td>74.00</td> <td>-19.85</td> <td>45.19</td> <td>34.58</td> <td>10.84</td> <td>36.46</td> <td>0.00</td> <td>112</td> <td>75</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5463.12</td> <td>62.93</td> <td>68.30</td> <td>-5.37</td> <td>53.97</td> <td>34.58</td> <td>10.84</td> <td>36.46</td> <td>0.00</td> <td>112</td> <td>75</td> <td>PEAK</td> </tr> </tbody> </table> | Limit       | Read         | Ant         | Cable       | Preamp | Aux   | APos   | TPos   | Remark | Freq | Level   | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor |  |  | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5459.44 | 54.15 | 74.00 | -19.85 | 45.19 | 34.58 | 10.84 | 36.46 | 0.00 | 112 | 75 | PEAK    | 2   | 5463.12 | 62.93 | 68.30 | -5.37 | 53.97  | 34.58 | 10.84 | 36.46 | 0.00   | 112  | 75    | PEAK        | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>112.89</td> <td>-----</td> <td>-----</td> <td>103.83</td> <td>34.56</td> <td>10.89</td> <td>36.39</td> <td>0.00</td> <td>112</td> <td>75</td> <td>PEAK</td> </tr> </tbody> </table> | Limit       | Read        | Ant    | Cable | Preamp | Aux | APos   | TPos   | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor |         |        | MHz   | dBuV/m | dBuV/m | dB    | dBuV  | dB/m  | dB   | dB  | cm | deg     | 1 | 5500.00 | 112.89 | ----- | ----- | 103.83 | 34.56 | 10.89 | 36.39 | 0.00 | 112 | 75 | PEAK |
|       | Limit   | Read        | Ant          | Cable       | Preamp      | Aux    | APos  | TPos   | Remark |        |      |         |             |              |             |             |        |  |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |         |       |       |       |        |       |       |       |        |      |       |             |   |             |             |        |       |        |     |        |        |        |      |       |             |              |             |             |        |         |        |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |        |       |       |       |      |     |    |      |
| Freq  | Level   | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor |       |        |        |        |      |         |             |              |             |             |        |  |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |         |       |       |       |        |       |       |       |        |      |       |             |   |             |             |        |       |        |     |        |        |        |      |       |             |              |             |             |        |         |        |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |        |       |       |       |      |     |    |      |
| MHz   | dBuV/m  | dBuV/m      | dB           | dBuV        | dB/m        | dB     | dB    | cm     | deg    |        |      |         |             |              |             |             |        |  |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |         |       |       |       |        |       |       |       |        |      |       |             |   |             |             |        |       |        |     |        |        |        |      |       |             |              |             |             |        |         |        |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |        |       |       |       |      |     |    |      |
| 1     | 5459.44   | 54.15       | 74.00        | -19.85      | 45.19       | 34.58  | 10.84 | 36.46  | 0.00   | 112    | 75   | PEAK    |             |              |             |             |        |  |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |         |       |       |       |        |       |       |       |        |      |       |             |   |             |             |        |       |        |     |        |        |        |      |       |             |              |             |             |        |         |        |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |        |       |       |       |      |     |    |      |
| 2     | 5463.12   | 62.93       | 68.30        | -5.37       | 53.97       | 34.58  | 10.84 | 36.46  | 0.00   | 112    | 75   | PEAK    |             |              |             |             |        |  |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |         |       |       |       |        |       |       |       |        |      |       |             |   |             |             |        |       |        |     |        |        |        |      |       |             |              |             |             |        |         |        |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |        |       |       |       |      |     |    |      |
| Limit | Read  | Ant         | Cable        | Preamp      | Aux         | APos   | TPos  | Remark |        |        |      |         |             |              |             |             |        |  |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |         |       |       |       |        |       |       |       |        |      |       |             |   |             |             |        |       |        |     |        |        |        |      |       |             |              |             |             |        |         |        |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |        |       |       |       |      |     |    |      |
| Freq  | Level   | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor |       |        |        |        |      |         |             |              |             |             |        |  |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |         |       |       |       |        |       |       |       |        |      |       |             |   |             |             |        |       |        |     |        |        |        |      |       |             |              |             |             |        |         |        |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |        |       |       |       |      |     |    |      |
| MHz   | dBuV/m  | dBuV/m      | dB           | dBuV        | dB/m        | dB     | dB    | cm     | deg    |        |      |         |             |              |             |             |        |  |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |         |       |       |       |        |       |       |       |        |      |       |             |   |             |             |        |       |        |     |        |        |        |      |       |             |              |             |             |        |         |        |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |        |       |       |       |      |     |    |      |
| 1     | 5500.00   | 112.89      | -----        | -----       | 103.83      | 34.56  | 10.89 | 36.39  | 0.00   | 112    | 75   | PEAK    |             |              |             |             |        |  |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |         |       |       |       |        |       |       |       |        |      |       |             |   |             |             |        |       |        |     |        |        |        |      |       |             |              |             |             |        |         |        |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |        |       |       |       |      |     |    |      |
| Avg   | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.48</td> <td>44.18</td> <td>54.00</td> <td>-9.82</td> <td>35.23</td> <td>34.58</td> <td>10.84</td> <td>36.47</td> <td>0.00</td> <td>112</td> <td>75</td> <td>AVERAGE</td> </tr> </tbody> </table>  | Limit       | Read         | Ant         | Cable       | Preamp | Aux   | APos   | TPos   | Remark | Freq | Level   | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor |  |  | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5458.48 | 44.18 | 54.00 | -9.82  | 35.23 | 34.58 | 10.84 | 36.47 | 0.00 | 112 | 75 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>106.33</td> <td>-----</td> <td>-----</td> <td>97.27</td> <td>34.56</td> <td>10.89</td> <td>36.39</td> <td>0.00</td> <td>112</td> <td>75</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit   | Read  | Ant   | Cable | Preamp | Aux   | APos  | TPos  | Remark | Freq | Level | Line Margin | Level Factor  | Loss Factor | Loss Factor | Factor |       |        | MHz | dBuV/m | dBuV/m | dB     | dBuV | dB/m  | dB          | dB           | cm          | deg         | 1      | 5500.00 | 106.33 | ----- | -----  | 97.27  | 34.56 | 10.89 | 36.39 | 0.00 | 112 | 75 | AVERAGE |   |         |        |       |       |        |       |       |       |      |     |    |      |
|       | Limit   | Read        | Ant          | Cable       | Preamp      | Aux    | APos  | TPos   | Remark |        |      |         |             |              |             |             |        |  |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |         |       |       |       |        |       |       |       |        |      |       |             |   |             |             |        |       |        |     |        |        |        |      |       |             |              |             |             |        |         |        |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |        |       |       |       |      |     |    |      |
| Freq  | Level   | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor |       |        |        |        |      |         |             |              |             |             |        |  |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |         |       |       |       |        |       |       |       |        |      |       |             |   |             |             |        |       |        |     |        |        |        |      |       |             |              |             |             |        |         |        |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |        |       |       |       |      |     |    |      |
| MHz   | dBuV/m  | dBuV/m      | dB           | dBuV        | dB/m        | dB     | dB    | cm     | deg    |        |      |         |             |              |             |             |        |  |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |         |       |       |       |        |       |       |       |        |      |       |             |   |             |             |        |       |        |     |        |        |        |      |       |             |              |             |             |        |         |        |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |        |       |       |       |      |     |    |      |
| 1     | 5458.48   | 44.18       | 54.00        | -9.82       | 35.23       | 34.58  | 10.84 | 36.47  | 0.00   | 112    | 75   | AVERAGE |             |              |             |             |        |  |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |         |       |       |       |        |       |       |       |        |      |       |             |   |             |             |        |       |        |     |        |        |        |      |       |             |              |             |             |        |         |        |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |        |       |       |       |      |     |    |      |
| Limit | Read  | Ant         | Cable        | Preamp      | Aux         | APos   | TPos  | Remark |        |        |      |         |             |              |             |             |        |  |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |         |       |       |       |        |       |       |       |        |      |       |             |   |             |             |        |       |        |     |        |        |        |      |       |             |              |             |             |        |         |        |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |        |       |       |       |      |     |    |      |
| Freq  | Level   | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor |       |        |        |        |      |         |             |              |             |             |        |  |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |         |       |       |       |        |       |       |       |        |      |       |             |   |             |             |        |       |        |     |        |        |        |      |       |             |              |             |             |        |         |        |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |        |       |       |       |      |     |    |      |
| MHz   | dBuV/m  | dBuV/m      | dB           | dBuV        | dB/m        | dB     | dB    | cm     | deg    |        |      |         |             |              |             |             |        |  |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |         |       |       |       |        |       |       |       |        |      |       |             |   |             |             |        |       |        |     |        |        |        |      |       |             |              |             |             |        |         |        |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |        |       |       |       |      |     |    |      |
| 1     | 5500.00   | 106.33      | -----        | -----       | 97.27       | 34.56  | 10.89 | 36.39  | 0.00   | 112    | 75   | AVERAGE |             |              |             |             |        |  |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |         |       |       |       |        |       |       |       |        |      |       |             |   |             |             |        |       |        |     |        |        |        |      |       |             |              |             |             |        |         |        |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |        |       |       |       |      |     |    |      |







| Mode  | 7   |             |              |             |        |        |        |        |        |        |      |         |             |              |             |        |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |         |       |       |        |        |       |       |       |        |      |       |             |   |             |        |        |        |        |     |        |        |        |      |       |             |              |             |        |        |         |       |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |       |       |       |       |      |     |    |      |
|-------|---|-------------|--------------|-------------|--------|--------|--------|--------|--------|--------|------|---------|-------------|--------------|-------------|--------|--------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|----|---------|---|---------|-------|-------|--------|--------|-------|-------|-------|--------|------|-------|-------------|---|-------------|--------|--------|--------|--------|-----|--------|--------|--------|------|-------|-------------|--------------|-------------|--------|--------|---------|-------|-------|--------|--------|-------|-------|-------|------|-----|----|---------|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|----|------|
|       | Band Edge   |             |              |             |        |        |        |        |        |        |      |         |             |              |             |        |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |         |       |       |        |        |       |       |       |        |      |       |             |   |             |        |        |        |        |     |        |        |        |      |       |             |              |             |        |        |         |       |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |       |       |       |       |      |     |    |      |
|       | U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz   |             |              |             |        |        |        |        |        |        |      |         |             |              |             |        |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |         |       |       |        |        |       |       |       |        |      |       |             |   |             |        |        |        |        |     |        |        |        |      |       |             |              |             |        |        |         |       |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |       |       |       |       |      |     |    |      |
| ANT   | CDD 4+5   |             |              |             |        |        |        |        |        |        |      |         |             |              |             |        |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |         |       |       |        |        |       |       |       |        |      |       |             |   |             |        |        |        |        |     |        |        |        |      |       |             |              |             |        |        |         |       |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |       |       |       |       |      |     |    |      |
| Pol.  | Vertical  | Fundamental |              |             |        |        |        |        |        |        |      |         |             |              |             |        |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |         |       |       |        |        |       |       |       |        |      |       |             |   |             |        |        |        |        |     |        |        |        |      |       |             |              |             |        |        |         |       |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |       |       |       |       |      |     |    |      |
| Peak  | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.96</td> <td>49.16</td> <td>74.00</td> <td>-24.84</td> <td>40.20</td> <td>34.58</td> <td>10.84</td> <td>36.46</td> <td>0.00</td> <td>100</td> <td>77</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5468.56</td> <td>56.92</td> <td>68.30</td> <td>-11.38</td> <td>47.95</td> <td>34.57</td> <td>10.85</td> <td>36.45</td> <td>0.00</td> <td>100</td> <td>77</td> <td>PEAK</td> </tr> </tbody> </table> | Limit       | Read         | Ant         | Cable  | Preamp | Aux    | APos   | TPos   | Remark | Freq | Level   | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor |  | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5458.96 | 49.16 | 74.00 | -24.84 | 40.20 | 34.58 | 10.84 | 36.46 | 0.00 | 100 | 77 | PEAK    | 2   | 5468.56 | 56.92 | 68.30 | -11.38 | 47.95  | 34.57 | 10.85 | 36.45 | 0.00   | 100  | 77    | PEAK        | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>105.83</td> <td>-----</td> <td>-----</td> <td>96.77</td> <td>34.56</td> <td>10.89</td> <td>36.39</td> <td>0.00</td> <td>100</td> <td>77</td> <td>PEAK</td> </tr> </tbody> </table> | Limit       | Read   | Ant    | Cable  | Preamp | Aux | APos   | TPos   | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor  |       | MHz   | dBuV/m | dBuV/m | dB    | dBuV  | dB/m  | dB   | dB  | cm | deg     | 1 | 5500.00 | 105.83 | ----- | ----- | 96.77 | 34.56 | 10.89 | 36.39 | 0.00 | 100 | 77 | PEAK |
|       | Limit   | Read        | Ant          | Cable       | Preamp | Aux    | APos   | TPos   | Remark |        |      |         |             |              |             |        |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |         |       |       |        |        |       |       |       |        |      |       |             |   |             |        |        |        |        |     |        |        |        |      |       |             |              |             |        |        |         |       |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |       |       |       |       |      |     |    |      |
| Freq  | Level   | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor |        |        |        |      |         |             |              |             |        |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |         |       |       |        |        |       |       |       |        |      |       |             |   |             |        |        |        |        |     |        |        |        |      |       |             |              |             |        |        |         |       |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |       |       |       |       |      |     |    |      |
| MHz   | dBuV/m  | dBuV/m      | dB           | dBuV        | dB/m   | dB     | dB     | cm     | deg    |        |      |         |             |              |             |        |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |         |       |       |        |        |       |       |       |        |      |       |             |   |             |        |        |        |        |     |        |        |        |      |       |             |              |             |        |        |         |       |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |       |       |       |       |      |     |    |      |
| 1     | 5458.96   | 49.16       | 74.00        | -24.84      | 40.20  | 34.58  | 10.84  | 36.46  | 0.00   | 100    | 77   | PEAK    |             |              |             |        |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |         |       |       |        |        |       |       |       |        |      |       |             |   |             |        |        |        |        |     |        |        |        |      |       |             |              |             |        |        |         |       |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |       |       |       |       |      |     |    |      |
| 2     | 5468.56   | 56.92       | 68.30        | -11.38      | 47.95  | 34.57  | 10.85  | 36.45  | 0.00   | 100    | 77   | PEAK    |             |              |             |        |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |         |       |       |        |        |       |       |       |        |      |       |             |   |             |        |        |        |        |     |        |        |        |      |       |             |              |             |        |        |         |       |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |       |       |       |       |      |     |    |      |
| Limit | Read  | Ant         | Cable        | Preamp      | Aux    | APos   | TPos   | Remark |        |        |      |         |             |              |             |        |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |         |       |       |        |        |       |       |       |        |      |       |             |   |             |        |        |        |        |     |        |        |        |      |       |             |              |             |        |        |         |       |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |       |       |       |       |      |     |    |      |
| Freq  | Level   | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor |        |        |        |      |         |             |              |             |        |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |         |       |       |        |        |       |       |       |        |      |       |             |   |             |        |        |        |        |     |        |        |        |      |       |             |              |             |        |        |         |       |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |       |       |       |       |      |     |    |      |
| MHz   | dBuV/m  | dBuV/m      | dB           | dBuV        | dB/m   | dB     | dB     | cm     | deg    |        |      |         |             |              |             |        |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |         |       |       |        |        |       |       |       |        |      |       |             |   |             |        |        |        |        |     |        |        |        |      |       |             |              |             |        |        |         |       |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |       |       |       |       |      |     |    |      |
| 1     | 5500.00   | 105.83      | -----        | -----       | 96.77  | 34.56  | 10.89  | 36.39  | 0.00   | 100    | 77   | PEAK    |             |              |             |        |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |         |       |       |        |        |       |       |       |        |      |       |             |   |             |        |        |        |        |     |        |        |        |      |       |             |              |             |        |        |         |       |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |       |       |       |       |      |     |    |      |
| Avg   | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.00</td> <td>39.56</td> <td>54.00</td> <td>-14.44</td> <td>30.61</td> <td>34.58</td> <td>10.84</td> <td>36.47</td> <td>0.00</td> <td>100</td> <td>77</td> <td>AVERAGE</td> </tr> </tbody> </table>  | Limit       | Read         | Ant         | Cable  | Preamp | Aux    | APos   | TPos   | Remark | Freq | Level   | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor |  | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5458.00 | 39.56 | 54.00 | -14.44 | 30.61 | 34.58 | 10.84 | 36.47 | 0.00 | 100 | 77 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>98.59</td> <td>-----</td> <td>-----</td> <td>89.53</td> <td>34.56</td> <td>10.89</td> <td>36.39</td> <td>0.00</td> <td>100</td> <td>77</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit   | Read  | Ant   | Cable  | Preamp | Aux   | APos  | TPos  | Remark | Freq | Level | Line Margin | Level Factor  | Loss Factor | Factor | Factor | Factor |        | MHz | dBuV/m | dBuV/m | dB     | dBuV | dB/m  | dB          | dB           | cm          | deg    | 1      | 5500.00 | 98.59 | ----- | -----  | 89.53  | 34.56 | 10.89 | 36.39 | 0.00 | 100 | 77 | AVERAGE |   |         |        |       |       |       |       |       |       |      |     |    |      |
| Limit | Read  | Ant         | Cable        | Preamp      | Aux    | APos   | TPos   | Remark |        |        |      |         |             |              |             |        |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |         |       |       |        |        |       |       |       |        |      |       |             |   |             |        |        |        |        |     |        |        |        |      |       |             |              |             |        |        |         |       |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |       |       |       |       |      |     |    |      |
| Freq  | Level   | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor |        |        |        |      |         |             |              |             |        |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |         |       |       |        |        |       |       |       |        |      |       |             |   |             |        |        |        |        |     |        |        |        |      |       |             |              |             |        |        |         |       |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |       |       |       |       |      |     |    |      |
| MHz   | dBuV/m  | dBuV/m      | dB           | dBuV        | dB/m   | dB     | dB     | cm     | deg    |        |      |         |             |              |             |        |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |         |       |       |        |        |       |       |       |        |      |       |             |   |             |        |        |        |        |     |        |        |        |      |       |             |              |             |        |        |         |       |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |       |       |       |       |      |     |    |      |
| 1     | 5458.00   | 39.56       | 54.00        | -14.44      | 30.61  | 34.58  | 10.84  | 36.47  | 0.00   | 100    | 77   | AVERAGE |             |              |             |        |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |         |       |       |        |        |       |       |       |        |      |       |             |   |             |        |        |        |        |     |        |        |        |      |       |             |              |             |        |        |         |       |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |       |       |       |       |      |     |    |      |
| Limit | Read  | Ant         | Cable        | Preamp      | Aux    | APos   | TPos   | Remark |        |        |      |         |             |              |             |        |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |         |       |       |        |        |       |       |       |        |      |       |             |   |             |        |        |        |        |     |        |        |        |      |       |             |              |             |        |        |         |       |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |       |       |       |       |      |     |    |      |
| Freq  | Level   | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor |        |        |        |      |         |             |              |             |        |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |         |       |       |        |        |       |       |       |        |      |       |             |   |             |        |        |        |        |     |        |        |        |      |       |             |              |             |        |        |         |       |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |       |       |       |       |      |     |    |      |
| MHz   | dBuV/m  | dBuV/m      | dB           | dBuV        | dB/m   | dB     | dB     | cm     | deg    |        |      |         |             |              |             |        |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |         |       |       |        |        |       |       |       |        |      |       |             |   |             |        |        |        |        |     |        |        |        |      |       |             |              |             |        |        |         |       |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |       |       |       |       |      |     |    |      |
| 1     | 5500.00   | 98.59       | -----        | -----       | 89.53  | 34.56  | 10.89  | 36.39  | 0.00   | 100    | 77   | AVERAGE |             |              |             |        |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |         |       |       |        |        |       |       |       |        |      |       |             |   |             |        |        |        |        |     |        |        |        |      |       |             |              |             |        |        |         |       |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |       |       |       |       |      |     |    |      |






| Mode     | 7  |          |        |        |        |        |        |        |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
|----------|--|----------|--------|--------|--------|--------|--------|--------|------|--------|------|---------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|
|          | Harmonic   |          |        |        |        |        |        |        |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
|          | U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz  |          |        |        |        |        |        |        |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| ANT      | CDD 4+5  |          |        |        |        |        |        |        |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| Pol.     | Horizontal   | Vertical |        |        |        |        |        |        |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>49.96</td> <td>74.00</td> <td>-24.04</td> <td>62.93</td> <td>37.90</td> <td>16.04</td> <td>66.91</td> <td>0.00</td> <td>100</td> <td>292</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11000.00</td> <td>39.71</td> <td>54.00</td> <td>-14.29</td> <td>52.68</td> <td>37.90</td> <td>16.04</td> <td>66.91</td> <td>0.00</td> <td>100</td> <td>292</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit    | Read   | Ant    | Cable  | Preamp | Aux    | APos   | TPos | Remark | Freq | Level   | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 | 11000.00 | 49.96 | 74.00 | -24.04 | 62.93 | 37.90 | 16.04 | 66.91 | 0.00 | 100 | 292 | PEAK | 2 | 11000.00 | 39.71 | 54.00 | -14.29 | 52.68 | 37.90 | 16.04 | 66.91 | 0.00 | 100 | 292 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>48.77</td> <td>74.00</td> <td>-25.23</td> <td>61.74</td> <td>37.90</td> <td>16.04</td> <td>66.91</td> <td>0.00</td> <td>101</td> <td>306</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11000.00</td> <td>38.33</td> <td>54.00</td> <td>-15.67</td> <td>51.30</td> <td>37.90</td> <td>16.04</td> <td>66.91</td> <td>0.00</td> <td>101</td> <td>306</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 | 11000.00 | 48.77 | 74.00 | -25.23 | 61.74 | 37.90 | 16.04 | 66.91 | 0.00 | 101 | 306 | PEAK | 2 | 11000.00 | 38.33 | 54.00 | -15.67 | 51.30 | 37.90 | 16.04 | 66.91 | 0.00 | 101 | 306 | AVERAGE |
| Limit    | Read   | Ant      | Cable  | Preamp | Aux    | APos   | TPos   | Remark |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| Freq     | Level  | Line     | Margin | Level  | Factor | Loss   | Factor | Factor |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| MHz      | dBuV/m   | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB     | dB     |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| 1        | 11000.00   | 49.96    | 74.00  | -24.04 | 62.93  | 37.90  | 16.04  | 66.91  | 0.00 | 100    | 292  | PEAK    |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| 2        | 11000.00   | 39.71    | 54.00  | -14.29 | 52.68  | 37.90  | 16.04  | 66.91  | 0.00 | 100    | 292  | AVERAGE |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| Limit    | Read   | Ant      | Cable  | Preamp | Aux    | APos   | TPos   | Remark |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| Freq     | Level  | Line     | Margin | Level  | Factor | Loss   | Factor | Factor |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| MHz      | dBuV/m   | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB     | dB     |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| 1        | 11000.00   | 48.77    | 74.00  | -25.23 | 61.74  | 37.90  | 16.04  | 66.91  | 0.00 | 101    | 306  | PEAK    |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| 2        | 11000.00   | 38.33    | 54.00  | -15.67 | 51.30  | 37.90  | 16.04  | 66.91  | 0.00 | 101    | 306  | AVERAGE |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |

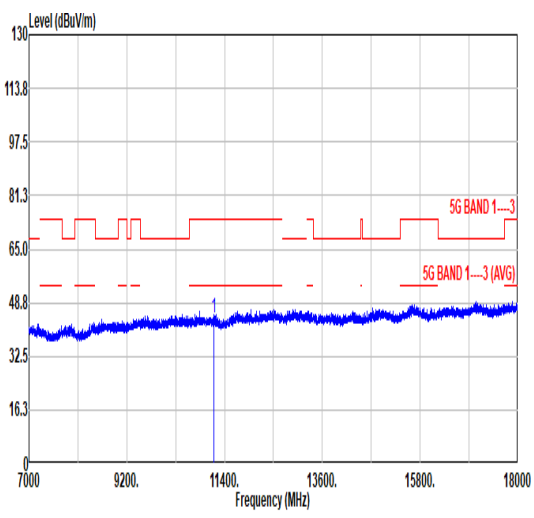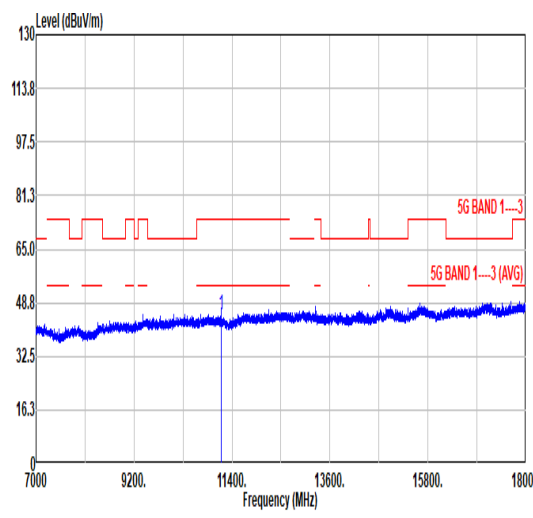

| Mode       | 8   |   |        |        |             |        |       |        |      |        |      |       |             |       |        |             |        |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |             |       |        |             |        |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |
|------------|---|---|--------|--------|-------------|--------|-------|--------|------|--------|------|-------|-------------|-------|--------|-------------|--------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|-------|--------|-------------|--------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|
|            | Harmonic  |   |        |        |             |        |       |        |      |        |      |       |             |       |        |             |        |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |             |       |        |             |        |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |
|            | U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz   |   |        |        |             |        |       |        |      |        |      |       |             |       |        |             |        |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |             |       |        |             |        |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |
| ANT        | CDD 4+5   |   |        |        |             |        |       |        |      |        |      |       |             |       |        |             |        |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |             |       |        |             |        |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |
| Pol.       | Horizontal  | Vertical  |        |        |             |        |       |        |      |        |      |       |             |       |        |             |        |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |             |       |        |             |        |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |
| Peak       |   |  |        |        |             |        |       |        |      |        |      |       |             |       |        |             |        |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |             |       |        |             |        |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |
| Avg        | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11160.00</td> <td>43.96</td> <td>74.00</td> <td>-30.04</td> <td>56.63</td> <td>38.03</td> <td>16.15</td> <td>66.85</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table> | Limit   | Read   | Ant    | Cable       | Preamp | Aux   | APos   | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor |  |  | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 11160.00 | 43.96 | 74.00 | -30.04 | 56.63 | 38.03 | 16.15 | 66.85 | 0.00 | --- | --- | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11160.00</td> <td>45.11</td> <td>74.00</td> <td>-28.89</td> <td>57.78</td> <td>38.03</td> <td>16.15</td> <td>66.85</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor |  |  | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 11160.00 | 45.11 | 74.00 | -28.89 | 57.78 | 38.03 | 16.15 | 66.85 | 0.00 | --- | --- | PEAK |
| Limit      | Read  | Ant   | Cable  | Preamp | Aux         | APos   | TPos  | Remark |      |        |      |       |             |       |        |             |        |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |             |       |        |             |        |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |
| Freq       | Level   | Line Margin   | Level  | Factor | Loss Factor | Factor |       |        |      |        |      |       |             |       |        |             |        |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |             |       |        |             |        |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |
| MHz        | dBuV/m  | dBuV/m  | dB     | dBuV   | dB/m        | dB     | dB    | cm     | deg  |        |      |       |             |       |        |             |        |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |             |       |        |             |        |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |
| 1 11160.00 | 43.96   | 74.00   | -30.04 | 56.63  | 38.03       | 16.15  | 66.85 | 0.00   | ---  | ---    | PEAK |       |             |       |        |             |        |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |             |       |        |             |        |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |
| Limit      | Read  | Ant   | Cable  | Preamp | Aux         | APos   | TPos  | Remark |      |        |      |       |             |       |        |             |        |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |             |       |        |             |        |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |
| Freq       | Level   | Line Margin   | Level  | Factor | Loss Factor | Factor |       |        |      |        |      |       |             |       |        |             |        |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |             |       |        |             |        |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |
| MHz        | dBuV/m  | dBuV/m  | dB     | dBuV   | dB/m        | dB     | dB    | cm     | deg  |        |      |       |             |       |        |             |        |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |             |       |        |             |        |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |
| 1 11160.00 | 45.11   | 74.00   | -28.89 | 57.78  | 38.03       | 16.15  | 66.85 | 0.00   | ---  | ---    | PEAK |       |             |       |        |             |        |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |             |       |        |             |        |  |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |

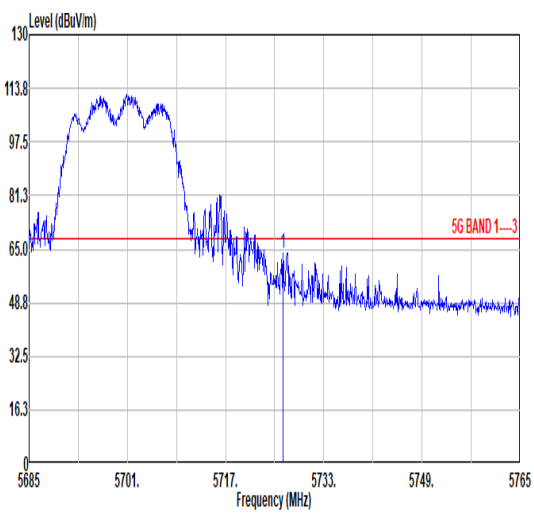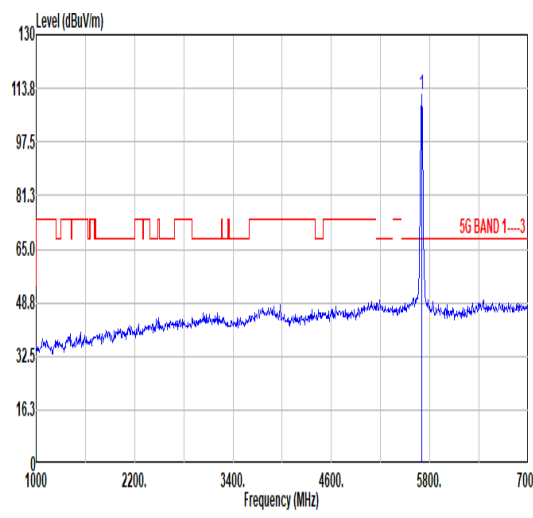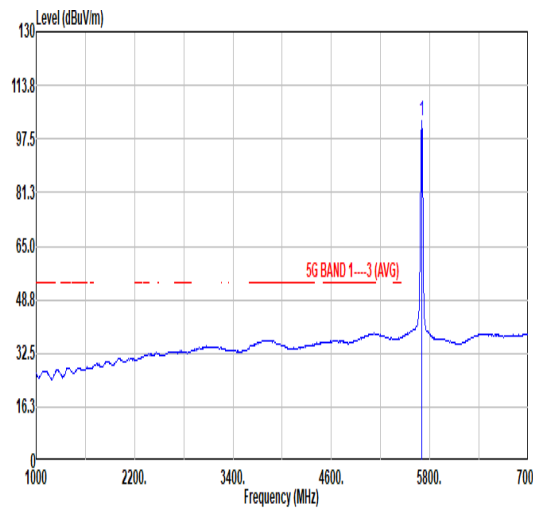

| Mode      | 9  |   |        |        |        |        |         |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |        |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |     |     |  |  |  |  |  |  |      |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |        |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |      |
|-----------|--|---|--------|--------|--------|--------|---------|------|------|------|-------|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|------|------|------|----|-----------|-----------|--------|-------|-------|-------|-------|-------|-------|--|--|--|--|--|------|------|-----|--|--|--|--|--|--|-----|-----|--|--|--|--|--|--|------|--|-------|------|-----|-------|--------|-----|------|------|------|-------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|-----------|--------|-------|-------|--------|-------|-------|-------|--|--|--|--|--|--|------|-----|--|--|--|--|--|--|--|-----|--|--|--|--|--|--|--|------|
|           | Band Edge  |   |        |        |        |        |         |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |        |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |     |     |  |  |  |  |  |  |      |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |        |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |      |
|           | U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz  |   |        |        |        |        |         |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |        |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |     |     |  |  |  |  |  |  |      |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |        |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |      |
| ANT       | CDD 4+5  |   |        |        |        |        |         |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |        |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |     |     |  |  |  |  |  |  |      |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |        |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |      |
| Pol.      | Horizontal   | Fundamental   |        |        |        |        |         |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |        |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |     |     |  |  |  |  |  |  |      |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |        |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |      |
| Peak      |  <table border="1" data-bbox="263 1131 782 1254"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5726.36</td> <td>63.94</td> <td>68.30</td> <td>-4.36</td> <td>55.72</td> <td>34.68</td> <td>11.18</td> <td>37.64</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>100</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>123</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>PEAK</td> </tr> </tbody> </table> | Limit   | Read   | Ant    | Cable  | Preamp | Aux     | APos | TPos | Freq | Level | Line  | Margin | Level  | Factor | Loss   | Factor | MHz    | dBuV/m | dBuV/m | dB     | dBuV | dB/m | dB   | dB | 1 5726.36 | 63.94     | 68.30  | -4.36 | 55.72 | 34.68 | 11.18 | 37.64 |       |  |  |  |  |  | 0.00 | 100  |     |  |  |  |  |  |  | 123 |     |  |  |  |  |  |  | PEAK |  <table border="1" data-bbox="901 1131 1420 1254"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>111.79</td> <td>-----</td> <td>-----</td> <td>103.17</td> <td>34.61</td> <td>11.14</td> <td>37.13</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>100</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>123</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 5700.00 | 111.79 | ----- | ----- | 103.17 | 34.61 | 11.14 | 37.13 |  |  |  |  |  |  | 0.00 | 100 |  |  |  |  |  |  |  | 123 |  |  |  |  |  |  |  | PEAK |
| Limit     | Read   | Ant   | Cable  | Preamp | Aux    | APos   | TPos    |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |        |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |     |     |  |  |  |  |  |  |      |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |        |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |      |
| Freq      | Level  | Line  | Margin | Level  | Factor | Loss   | Factor  |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |        |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |     |     |  |  |  |  |  |  |      |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |        |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |      |
| MHz       | dBuV/m   | dBuV/m  | dB     | dBuV   | dB/m   | dB     | dB      |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |        |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |     |     |  |  |  |  |  |  |      |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |        |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |      |
| 1 5726.36 | 63.94  | 68.30   | -4.36  | 55.72  | 34.68  | 11.18  | 37.64   |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |        |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |     |     |  |  |  |  |  |  |      |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |        |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |      |
|           |  |   |        |        |        | 0.00   | 100     |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |        |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |     |     |  |  |  |  |  |  |      |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |        |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |      |
|           |  |   |        |        |        |        | 123     |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |        |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |     |     |  |  |  |  |  |  |      |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |        |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |      |
|           |  |   |        |        |        |        | PEAK    |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |        |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |     |     |  |  |  |  |  |  |      |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |        |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |      |
| Limit     | Read   | Ant   | Cable  | Preamp | Aux    | APos   | TPos    |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |        |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |     |     |  |  |  |  |  |  |      |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |        |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |      |
| Freq      | Level  | Line  | Margin | Level  | Factor | Loss   | Factor  |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |        |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |     |     |  |  |  |  |  |  |      |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |        |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |      |
| MHz       | dBuV/m   | dBuV/m  | dB     | dBuV   | dB/m   | dB     | dB      |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |        |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |     |     |  |  |  |  |  |  |      |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |        |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |      |
| 1 5700.00 | 111.79   | -----   | -----  | 103.17 | 34.61  | 11.14  | 37.13   |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |        |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |     |     |  |  |  |  |  |  |      |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |        |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |      |
|           |  |   |        |        |        | 0.00   | 100     |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |        |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |     |     |  |  |  |  |  |  |      |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |        |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |      |
|           |  |   |        |        |        |        | 123     |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |        |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |     |     |  |  |  |  |  |  |      |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |        |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |      |
|           |  |   |        |        |        |        | PEAK    |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |        |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |     |     |  |  |  |  |  |  |      |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |        |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |      |
| Avg       | Blank  |  <table border="1" data-bbox="901 1814 1420 1937"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>102.83</td> <td>-----</td> <td>-----</td> <td>94.30</td> <td>34.62</td> <td>11.15</td> <td>37.24</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>100</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>123</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit  | Read   | Ant    | Cable  | Preamp  | Aux  | APos | TPos | Freq  | Level | Line   | Margin | Level  | Factor | Loss   | Factor | MHz    | dBuV/m | dBuV/m | dB   | dBuV | dB/m | dB | dB        | 1 5700.00 | 102.83 | ----- | ----- | 94.30 | 34.62 | 11.15 | 37.24 |  |  |  |  |  |      | 0.00 | 100 |  |  |  |  |  |  |     | 123 |  |  |  |  |  |  |      | AVERAGE  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |        |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |      |
| Limit     | Read   | Ant   | Cable  | Preamp | Aux    | APos   | TPos    |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |        |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |     |     |  |  |  |  |  |  |      |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |        |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |      |
| Freq      | Level  | Line  | Margin | Level  | Factor | Loss   | Factor  |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |        |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |     |     |  |  |  |  |  |  |      |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |        |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |      |
| MHz       | dBuV/m   | dBuV/m  | dB     | dBuV   | dB/m   | dB     | dB      |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |        |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |     |     |  |  |  |  |  |  |      |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |        |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |      |
| 1 5700.00 | 102.83   | -----   | -----  | 94.30  | 34.62  | 11.15  | 37.24   |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |        |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |     |     |  |  |  |  |  |  |      |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |        |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |      |
|           |  |   |        |        |        | 0.00   | 100     |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |        |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |     |     |  |  |  |  |  |  |      |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |        |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |      |
|           |  |   |        |        |        |        | 123     |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |        |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |     |     |  |  |  |  |  |  |      |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |        |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |      |
|           |  |   |        |        |        |        | AVERAGE |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |        |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |     |     |  |  |  |  |  |  |      |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |        |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |      |







| Mode      | 9   |  |        |        |        |        |             |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |          |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |
|-----------|---|--|--------|--------|--------|--------|-------------|------|------|------|-------|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|------|------|------|----|-----------|-----------|-------|-------|-------|-------|-------|-------|-------|--|--|--|--|--|------|------|-----|--|--|--|--|--|--|----------|--|-------|------|-----|-------|--------|-----|------|------|------|-------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|-----------|--------|-------|-------|-------|-------|-------|-------|--|--|--|--|--|--|------|-----|--|--|--|--|--|--|--|----------|
|           | Band Edge   |  |        |        |        |        |             |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |          |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |
|           | U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz   |  |        |        |        |        |             |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |          |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |
| ANT       | CDD 4+5   |  |        |        |        |        |             |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |          |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |
| Pol.      | Vertical  | Fundamental  |        |        |        |        |             |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |          |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |
| Peak      | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5725.48</td> <td>61.04</td> <td>68.30</td> <td>-7.26</td> <td>52.80</td> <td>34.68</td> <td>11.18</td> <td>37.62</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>100</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>342 PEAK</td> </tr> </tbody> </table> | Limit  | Read   | Ant    | Cable  | Preamp | Aux         | APos | TPos | Freq | Level | Line  | Margin | Level  | Factor | Loss   | Factor | MHz    | dBuV/m | dBuV/m | dB     | dBuV | dB/m | dB   | dB | 1 5725.48 | 61.04     | 68.30 | -7.26 | 52.80 | 34.68 | 11.18 | 37.62 |       |  |  |  |  |  | 0.00 | 100  |     |  |  |  |  |  |  | 342 PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>102.71</td> <td>-----</td> <td>-----</td> <td>94.18</td> <td>34.62</td> <td>11.15</td> <td>37.24</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>100</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>342 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 5700.00 | 102.71 | ----- | ----- | 94.18 | 34.62 | 11.15 | 37.24 |  |  |  |  |  |  | 0.00 | 100 |  |  |  |  |  |  |  | 342 PEAK |
| Limit     | Read  | Ant  | Cable  | Preamp | Aux    | APos   | TPos        |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |          |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |
| Freq      | Level   | Line   | Margin | Level  | Factor | Loss   | Factor      |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |          |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |
| MHz       | dBuV/m  | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB          |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |          |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |
| 1 5725.48 | 61.04   | 68.30  | -7.26  | 52.80  | 34.68  | 11.18  | 37.62       |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |          |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |
|           |   |  |        |        |        | 0.00   | 100         |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |          |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |
|           |   |  |        |        |        |        | 342 PEAK    |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |          |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |
| Limit     | Read  | Ant  | Cable  | Preamp | Aux    | APos   | TPos        |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |          |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |
| Freq      | Level   | Line   | Margin | Level  | Factor | Loss   | Factor      |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |          |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |
| MHz       | dBuV/m  | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB          |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |          |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |
| 1 5700.00 | 102.71  | -----  | -----  | 94.18  | 34.62  | 11.15  | 37.24       |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |          |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |
|           |   |  |        |        |        | 0.00   | 100         |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |          |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |
|           |   |  |        |        |        |        | 342 PEAK    |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |          |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |
| Avg       | Blank   | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>96.70</td> <td>-----</td> <td>-----</td> <td>88.08</td> <td>34.61</td> <td>11.14</td> <td>37.13</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>100</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>342 AVERAGE</td> </tr> </tbody> </table> | Limit  | Read   | Ant    | Cable  | Preamp      | Aux  | APos | TPos | Freq  | Level | Line   | Margin | Level  | Factor | Loss   | Factor | MHz    | dBuV/m | dBuV/m | dB   | dBuV | dB/m | dB | dB        | 1 5700.00 | 96.70 | ----- | ----- | 88.08 | 34.61 | 11.14 | 37.13 |  |  |  |  |  |      | 0.00 | 100 |  |  |  |  |  |  |          | 342 AVERAGE  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |
| Limit     | Read  | Ant  | Cable  | Preamp | Aux    | APos   | TPos        |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |          |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |
| Freq      | Level   | Line   | Margin | Level  | Factor | Loss   | Factor      |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |          |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |
| MHz       | dBuV/m  | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB          |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |          |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |
| 1 5700.00 | 96.70   | -----  | -----  | 88.08  | 34.61  | 11.14  | 37.13       |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |          |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |
|           |   |  |        |        |        | 0.00   | 100         |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |          |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |
|           |   |  |        |        |        |        | 342 AVERAGE |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |       |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |          |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |







| Mode       | 9  |          |        |        |        |        |        |        |              |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |              |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |              |
|------------|--|----------|--------|--------|--------|--------|--------|--------|--------------|--------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|------------|-------|-------|--------|-------|-------|-------|-------|------|--------------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|------------|-------|-------|--------|-------|-------|-------|-------|------|--------------|
|            | Harmonic   |          |        |        |        |        |        |        |              |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |              |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |              |
|            | U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz  |          |        |        |        |        |        |        |              |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |              |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |              |
| ANT        | CDD 4+5  |          |        |        |        |        |        |        |              |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |              |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |              |
| Pol.       | Horizontal   | Vertical |        |        |        |        |        |        |              |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |              |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |              |
| Peak       |  |          |        |        |        |        |        |        |              |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |              |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |              |
| Avg        |  |          |        |        |        |        |        |        |              |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |              |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |              |
|            | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11400.00</td> <td>43.50</td> <td>74.00</td> <td>-30.50</td> <td>55.75</td> <td>38.22</td> <td>16.30</td> <td>66.77</td> <td>0.00</td> <td>--- --- PEAK</td> </tr> </tbody> </table> | Limit    | Read   | Ant    | Cable  | Preamp | Aux    | APos   | TPos         | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 11400.00 | 43.50 | 74.00 | -30.50 | 55.75 | 38.22 | 16.30 | 66.77 | 0.00 | --- --- PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11400.00</td> <td>46.17</td> <td>74.00</td> <td>-27.83</td> <td>58.42</td> <td>38.22</td> <td>16.30</td> <td>66.77</td> <td>0.00</td> <td>--- --- PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 11400.00 | 46.17 | 74.00 | -27.83 | 58.42 | 38.22 | 16.30 | 66.77 | 0.00 | --- --- PEAK |
| Limit      | Read   | Ant      | Cable  | Preamp | Aux    | APos   | TPos   | Remark |              |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |              |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |              |
| Freq       | Level  | Line     | Margin | Level  | Factor | Loss   | Factor | Factor |              |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |              |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |              |
| MHz        | dBuV/m   | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB     | dB     |              |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |              |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |              |
| 1 11400.00 | 43.50  | 74.00    | -30.50 | 55.75  | 38.22  | 16.30  | 66.77  | 0.00   | --- --- PEAK |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |              |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |              |
| Limit      | Read   | Ant      | Cable  | Preamp | Aux    | APos   | TPos   | Remark |              |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |              |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |              |
| Freq       | Level  | Line     | Margin | Level  | Factor | Loss   | Factor | Factor |              |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |              |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |              |
| MHz        | dBuV/m   | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB     | dB     |              |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |              |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |              |
| 1 11400.00 | 46.17  | 74.00    | -27.83 | 58.42  | 38.22  | 16.30  | 66.77  | 0.00   | --- --- PEAK |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |              |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |              |

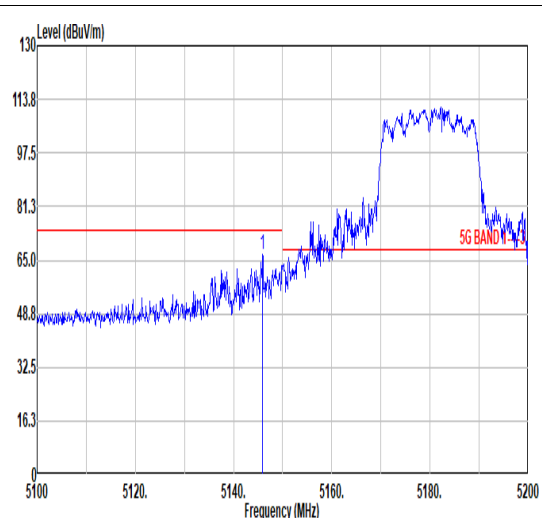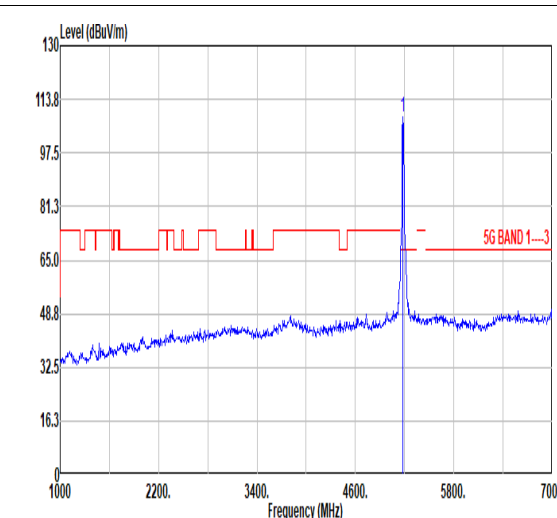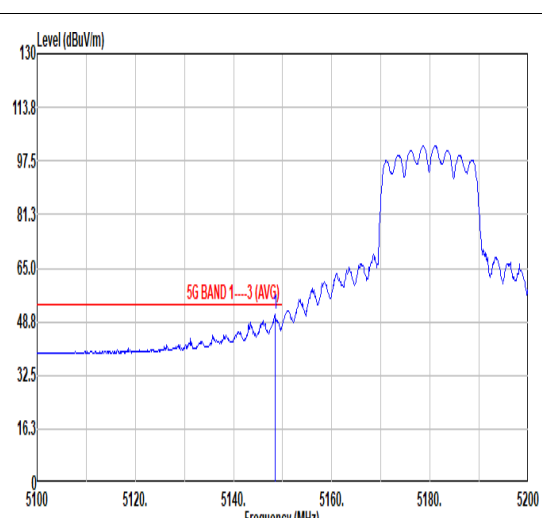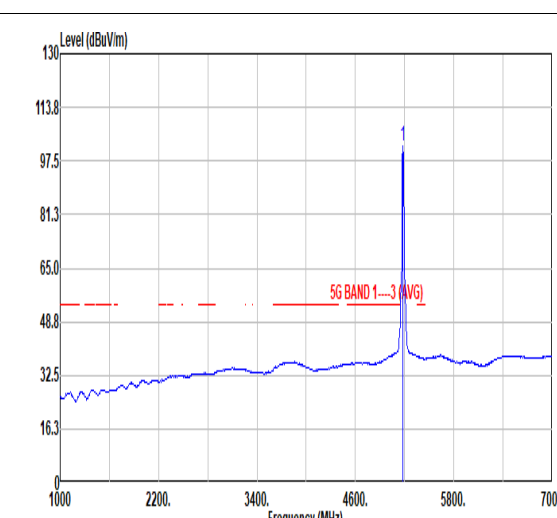

|       |  | 10          |        |        |        |        |        |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
|-------|--|-------------|--------|--------|--------|--------|--------|-------|------|------|-------|---------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|---|---------|-------|-------|-------|-------|-------|-------|-------|------|-----|----|---------|---|-------|------|-----|-------|--------|-----|------|------|------|-------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|---|---------|--------|-------|-------|--------|-------|-------|-------|------|-----|----|---------|
| Mode  | Band Edge  |             |        |        |        |        |        |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
|       | U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz   |             |        |        |        |        |        |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| ANT   | CDD 4+5  |             |        |        |        |        |        |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Pol.  | Horizontal   | Fundamental |        |        |        |        |        |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Peak  |  <p>Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a signal level rising from approximately 48.8 dBuV/m at 5100 MHz to a peak of about 113.8 dBuV/m at 5180 MHz. A red horizontal line indicates the 5G BAND 1-3 limit at approximately 65.0 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5145.90</td> <td>66.77</td> <td>74.00</td> <td>-7.23</td> <td>59.01</td> <td>34.22</td> <td>10.60</td> <td>37.06</td> <td>0.00</td> <td>106</td> <td>70</td> <td>PEAK</td> </tr> </tbody> </table>                             | Limit       | Read   | Ant    | Cable  | Preamp | Aux    | APos  | TPos | Freq | Level | Line    | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 5145.90 | 66.77 | 74.00 | -7.23 | 59.01 | 34.22 | 10.60 | 37.06 | 0.00 | 106 | 70 | PEAK    |  <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. The plot shows a signal level rising from approximately 32.5 dBuV/m at 1000 MHz to a sharp peak of about 113.8 dBuV/m at 5180 MHz. A red horizontal line indicates the 5G BAND 1-3 limit at approximately 65.0 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>108.53</td> <td>68.30</td> <td>40.23</td> <td>100.60</td> <td>34.28</td> <td>10.64</td> <td>36.99</td> <td>0.00</td> <td>106</td> <td>70</td> <td>PEAK</td> </tr> </tbody> </table>                      | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 5180.00 | 108.53 | 68.30 | 40.23 | 100.60 | 34.28 | 10.64 | 36.99 | 0.00 | 106 | 70 | PEAK    |
|       | Limit  | Read        | Ant    | Cable  | Preamp | Aux    | APos   | TPos  |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Freq  | Level  | Line        | Margin | Level  | Factor | Loss   | Factor |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| MHz   | dBuV/m   | dBuV/m      | dB     | dBuV   | dB/m   | dB     | dB     |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| 1     | 5145.90  | 66.77       | 74.00  | -7.23  | 59.01  | 34.22  | 10.60  | 37.06 | 0.00 | 106  | 70    | PEAK    |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Limit | Read   | Ant         | Cable  | Preamp | Aux    | APos   | TPos   |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Freq  | Level  | Line        | Margin | Level  | Factor | Loss   | Factor |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| MHz   | dBuV/m   | dBuV/m      | dB     | dBuV   | dB/m   | dB     | dB     |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| 1     | 5180.00  | 108.53      | 68.30  | 40.23  | 100.60 | 34.28  | 10.64  | 36.99 | 0.00 | 106  | 70    | PEAK    |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Avg   |  <p>Level (dBuV/m) vs Frequency (MHz) for Average Horizontal polarization. The plot shows a signal level rising from approximately 32.5 dBuV/m at 5100 MHz to an average level of about 113.8 dBuV/m at 5180 MHz. A red horizontal line indicates the 5G BAND 1-3 (AVG) limit at approximately 65.0 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.40</td> <td>50.83</td> <td>54.00</td> <td>-3.17</td> <td>43.04</td> <td>34.23</td> <td>10.61</td> <td>37.05</td> <td>0.00</td> <td>106</td> <td>70</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit       | Read   | Ant    | Cable  | Preamp | Aux    | APos  | TPos | Freq | Level | Line    | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 5148.40 | 50.83 | 54.00 | -3.17 | 43.04 | 34.23 | 10.61 | 37.05 | 0.00 | 106 | 70 | AVERAGE |  <p>Level (dBuV/m) vs Frequency (MHz) for Average Fundamental polarization. The plot shows a signal level rising from approximately 32.5 dBuV/m at 1000 MHz to an average level of about 113.8 dBuV/m at 5180 MHz. A red horizontal line indicates the 5G BAND 1-3 (AVG) limit at approximately 65.0 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>101.95</td> <td>68.30</td> <td>33.65</td> <td>94.02</td> <td>34.28</td> <td>10.64</td> <td>36.99</td> <td>0.00</td> <td>106</td> <td>70</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 5180.00 | 101.95 | 68.30 | 33.65 | 94.02  | 34.28 | 10.64 | 36.99 | 0.00 | 106 | 70 | AVERAGE |
| Limit | Read   | Ant         | Cable  | Preamp | Aux    | APos   | TPos   |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Freq  | Level  | Line        | Margin | Level  | Factor | Loss   | Factor |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| MHz   | dBuV/m   | dBuV/m      | dB     | dBuV   | dB/m   | dB     | dB     |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| 1     | 5148.40  | 50.83       | 54.00  | -3.17  | 43.04  | 34.23  | 10.61  | 37.05 | 0.00 | 106  | 70    | AVERAGE |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Limit | Read   | Ant         | Cable  | Preamp | Aux    | APos   | TPos   |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Freq  | Level  | Line        | Margin | Level  | Factor | Loss   | Factor |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| MHz   | dBuV/m   | dBuV/m      | dB     | dBuV   | dB/m   | dB     | dB     |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| 1     | 5180.00  | 101.95      | 68.30  | 33.65  | 94.02  | 34.28  | 10.64  | 36.99 | 0.00 | 106  | 70    | AVERAGE |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |

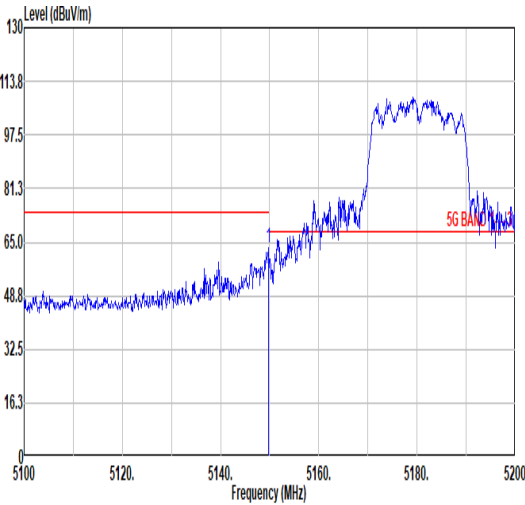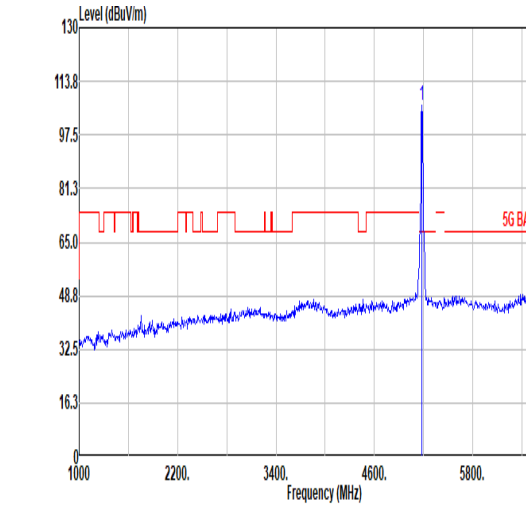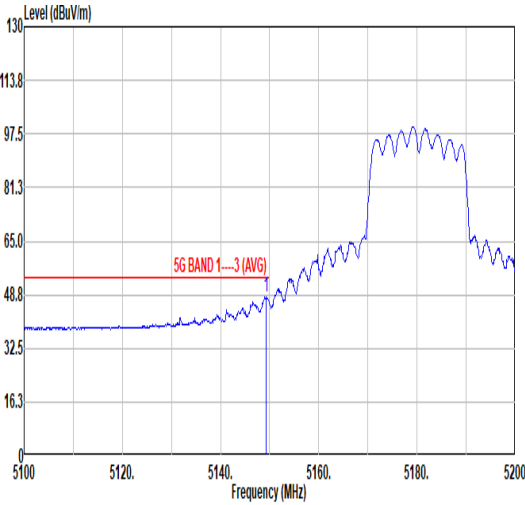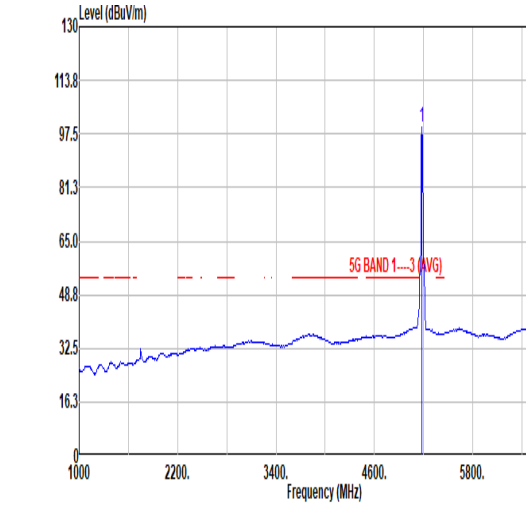

|       |   | 10          |        |        |        |        |        |        |        |     |     |         |       |      |        |       |        |      |        |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |  |  |      |       |      |        |       |        |      |        |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
|-------|---|-------------|--------|--------|--------|--------|--------|--------|--------|-----|-----|---------|-------|------|--------|-------|--------|------|--------|--------|--------|-----|--------|--------|----|------|------|----|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|---|-------|------|-----|-------|--------|-----|------|------|--|--|------|-------|------|--------|-------|--------|------|--------|--------|--------|-----|--------|--------|----|------|------|----|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|
| Mode  | Band Edge   |             |        |        |        |        |        |        |        |     |     |         |       |      |        |       |        |      |        |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |  |  |      |       |      |        |       |        |      |        |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
|       | U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz  |             |        |        |        |        |        |        |        |     |     |         |       |      |        |       |        |      |        |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |  |  |      |       |      |        |       |        |      |        |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| ANT   | CDD 4+5   |             |        |        |        |        |        |        |        |     |     |         |       |      |        |       |        |      |        |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |  |  |      |       |      |        |       |        |      |        |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Pol.  | Vertical  | Fundamental |        |        |        |        |        |        |        |     |     |         |       |      |        |       |        |      |        |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |  |  |      |       |      |        |       |        |      |        |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Peak  |  <table border="1" data-bbox="268 1131 794 1254"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.80</td> <td>63.21</td> <td>74.00</td> <td>-10.79</td> <td>55.42</td> <td>34.23</td> <td>10.61</td> <td>37.05</td> <td>0.00</td> <td>398</td> <td>241</td> <td>PEAK</td> </tr> </tbody> </table>    | Limit       | Read   | Ant    | Cable  | Preamp | Aux    | APos   | TPos   |     |     | Freq    | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | 1 | 5149.80 | 63.21 | 74.00 | -10.79 | 55.42 | 34.23 | 10.61 | 37.05 | 0.00 | 398 | 241 | PEAK    |  <table border="1" data-bbox="858 1131 1385 1254"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>106.42</td> <td>68.30</td> <td>38.12</td> <td>98.49</td> <td>34.28</td> <td>10.64</td> <td>36.99</td> <td>0.00</td> <td>398</td> <td>241</td> <td>PEAK</td> </tr> </tbody> </table>    | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos |  |  | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | 1 | 5180.00 | 106.42 | 68.30 | 38.12 | 98.49 | 34.28 | 10.64 | 36.99 | 0.00 | 398 | 241 | PEAK    |
|       | Limit   | Read        | Ant    | Cable  | Preamp | Aux    | APos   | TPos   |        |     |     |         |       |      |        |       |        |      |        |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |  |  |      |       |      |        |       |        |      |        |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Freq  | Level   | Line        | Margin | Level  | Factor | Loss   | Factor | Factor | Remark |     |     |         |       |      |        |       |        |      |        |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |  |  |      |       |      |        |       |        |      |        |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| MHz   | dBuV/m  | dBuV/m      | dB     | dBuV   | dB/m   | dB     | dB     | dB     | cm     | deg |     |         |       |      |        |       |        |      |        |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |  |  |      |       |      |        |       |        |      |        |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| 1     | 5149.80   | 63.21       | 74.00  | -10.79 | 55.42  | 34.23  | 10.61  | 37.05  | 0.00   | 398 | 241 | PEAK    |       |      |        |       |        |      |        |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |  |  |      |       |      |        |       |        |      |        |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Limit | Read  | Ant         | Cable  | Preamp | Aux    | APos   | TPos   |        |        |     |     |         |       |      |        |       |        |      |        |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |  |  |      |       |      |        |       |        |      |        |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Freq  | Level   | Line        | Margin | Level  | Factor | Loss   | Factor | Factor | Remark |     |     |         |       |      |        |       |        |      |        |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |  |  |      |       |      |        |       |        |      |        |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| MHz   | dBuV/m  | dBuV/m      | dB     | dBuV   | dB/m   | dB     | dB     | dB     | cm     | deg |     |         |       |      |        |       |        |      |        |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |  |  |      |       |      |        |       |        |      |        |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| 1     | 5180.00   | 106.42      | 68.30  | 38.12  | 98.49  | 34.28  | 10.64  | 36.99  | 0.00   | 398 | 241 | PEAK    |       |      |        |       |        |      |        |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |  |  |      |       |      |        |       |        |      |        |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Avg   |  <table border="1" data-bbox="268 1812 794 1935"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.20</td> <td>48.06</td> <td>54.00</td> <td>-5.94</td> <td>40.27</td> <td>34.23</td> <td>10.61</td> <td>37.05</td> <td>0.00</td> <td>398</td> <td>241</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit       | Read   | Ant    | Cable  | Preamp | Aux    | APos   | TPos   |     |     | Freq    | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | 1 | 5149.20 | 48.06 | 54.00 | -5.94  | 40.27 | 34.23 | 10.61 | 37.05 | 0.00 | 398 | 241 | AVERAGE |  <table border="1" data-bbox="858 1812 1385 1935"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>99.47</td> <td>68.30</td> <td>31.17</td> <td>91.54</td> <td>34.28</td> <td>10.64</td> <td>36.99</td> <td>0.00</td> <td>398</td> <td>241</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos |  |  | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | 1 | 5180.00 | 99.47  | 68.30 | 31.17 | 91.54 | 34.28 | 10.64 | 36.99 | 0.00 | 398 | 241 | AVERAGE |
|       | Limit   | Read        | Ant    | Cable  | Preamp | Aux    | APos   | TPos   |        |     |     |         |       |      |        |       |        |      |        |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |  |  |      |       |      |        |       |        |      |        |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Freq  | Level   | Line        | Margin | Level  | Factor | Loss   | Factor | Factor | Remark |     |     |         |       |      |        |       |        |      |        |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |  |  |      |       |      |        |       |        |      |        |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| MHz   | dBuV/m  | dBuV/m      | dB     | dBuV   | dB/m   | dB     | dB     | dB     | cm     | deg |     |         |       |      |        |       |        |      |        |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |  |  |      |       |      |        |       |        |      |        |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| 1     | 5149.20   | 48.06       | 54.00  | -5.94  | 40.27  | 34.23  | 10.61  | 37.05  | 0.00   | 398 | 241 | AVERAGE |       |      |        |       |        |      |        |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |  |  |      |       |      |        |       |        |      |        |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Limit | Read  | Ant         | Cable  | Preamp | Aux    | APos   | TPos   |        |        |     |     |         |       |      |        |       |        |      |        |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |  |  |      |       |      |        |       |        |      |        |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Freq  | Level   | Line        | Margin | Level  | Factor | Loss   | Factor | Factor | Remark |     |     |         |       |      |        |       |        |      |        |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |  |  |      |       |      |        |       |        |      |        |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| MHz   | dBuV/m  | dBuV/m      | dB     | dBuV   | dB/m   | dB     | dB     | dB     | cm     | deg |     |         |       |      |        |       |        |      |        |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |  |  |      |       |      |        |       |        |      |        |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| 1     | 5180.00   | 99.47       | 68.30  | 31.17  | 91.54  | 34.28  | 10.64  | 36.99  | 0.00   | 398 | 241 | AVERAGE |       |      |        |       |        |      |        |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |  |  |      |       |      |        |       |        |      |        |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |





| Mode        | 10  |          |        |        |        |        |        |        |      |        |         |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
|-------------|---|----------|--------|--------|--------|--------|--------|--------|------|--------|---------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|---|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|
|             | Harmonic  |          |        |        |        |        |        |        |      |        |         |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
|             | U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz  |          |        |        |        |        |        |        |      |        |         |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
| ANT         | CDD 4+5   |          |        |        |        |        |        |        |      |        |         |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
| Pol.        | Horizontal  | Vertical |        |        |        |        |        |        |      |        |         |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
| Peak<br>Avg |   |          |        |        |        |        |        |        |      |        |         |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
|             | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 10360.00</td> <td>54.91</td> <td>68.30</td> <td>-13.39</td> <td>69.14</td> <td>37.46</td> <td>15.45</td> <td>67.14</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2 15540.00</td> <td>51.21</td> <td>74.00</td> <td>-22.79</td> <td>56.24</td> <td>40.09</td> <td>19.04</td> <td>64.16</td> <td>0.00</td> <td>105</td> <td>346</td> <td>PEAK</td> </tr> <tr> <td>3 15540.00</td> <td>38.18</td> <td>54.00</td> <td>-15.82</td> <td>43.20</td> <td>40.09</td> <td>19.05</td> <td>64.16</td> <td>0.00</td> <td>105</td> <td>346</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit    | Read   | Ant    | Cable  | Preamp | Aux    | APos   | TPos | Remark | Freq    | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | 1 10360.00 | 54.91 | 68.30 | -13.39 | 69.14 | 37.46 | 15.45 | 67.14 | 0.00 | --- | --- | PEAK | 2 15540.00 | 51.21 | 74.00 | -22.79 | 56.24 | 40.09 | 19.04 | 64.16 | 0.00 | 105 | 346 | PEAK | 3 15540.00 | 38.18 | 54.00 | -15.82 | 43.20 | 40.09 | 19.05 | 64.16 | 0.00 | 105 | 346 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 10360.00</td> <td>54.91</td> <td>68.30</td> <td>-13.39</td> <td>69.14</td> <td>37.46</td> <td>15.45</td> <td>67.14</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2 15540.00</td> <td>51.21</td> <td>74.00</td> <td>-22.79</td> <td>56.24</td> <td>40.09</td> <td>19.04</td> <td>64.16</td> <td>0.00</td> <td>105</td> <td>346</td> <td>PEAK</td> </tr> <tr> <td>3 15540.00</td> <td>38.18</td> <td>54.00</td> <td>-15.82</td> <td>43.20</td> <td>40.09</td> <td>19.05</td> <td>64.16</td> <td>0.00</td> <td>105</td> <td>346</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | 1 10360.00 | 54.91 | 68.30 | -13.39 | 69.14 | 37.46 | 15.45 | 67.14 | 0.00 | --- | --- | PEAK | 2 15540.00 | 51.21 | 74.00 | -22.79 | 56.24 | 40.09 | 19.04 | 64.16 | 0.00 | 105 | 346 | PEAK | 3 15540.00 | 38.18 | 54.00 | -15.82 | 43.20 | 40.09 | 19.05 | 64.16 | 0.00 | 105 | 346 |
| Limit       | Read  | Ant      | Cable  | Preamp | Aux    | APos   | TPos   | Remark |      |        |         |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
| Freq        | Level   | Line     | Margin | Level  | Factor | Loss   | Factor | Factor |      |        |         |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
| MHz         | dBuV/m  | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB     | cm     |      |        |         |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
| 1 10360.00  | 54.91   | 68.30    | -13.39 | 69.14  | 37.46  | 15.45  | 67.14  | 0.00   | ---  | ---    | PEAK    |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
| 2 15540.00  | 51.21   | 74.00    | -22.79 | 56.24  | 40.09  | 19.04  | 64.16  | 0.00   | 105  | 346    | PEAK    |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
| 3 15540.00  | 38.18   | 54.00    | -15.82 | 43.20  | 40.09  | 19.05  | 64.16  | 0.00   | 105  | 346    | AVERAGE |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
| Limit       | Read  | Ant      | Cable  | Preamp | Aux    | APos   | TPos   | Remark |      |        |         |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
| Freq        | Level   | Line     | Margin | Level  | Factor | Loss   | Factor | Factor |      |        |         |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
| MHz         | dBuV/m  | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB     | cm     |      |        |         |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
| 1 10360.00  | 54.91   | 68.30    | -13.39 | 69.14  | 37.46  | 15.45  | 67.14  | 0.00   | ---  | ---    | PEAK    |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
| 2 15540.00  | 51.21   | 74.00    | -22.79 | 56.24  | 40.09  | 19.04  | 64.16  | 0.00   | 105  | 346    | PEAK    |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
| 3 15540.00  | 38.18   | 54.00    | -15.82 | 43.20  | 40.09  | 19.05  | 64.16  | 0.00   | 105  | 346    | AVERAGE |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
| Peak<br>Avg |   |          |        |        |        |        |        |        |      |        |         |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |



| Mode     | 11   |             |              |             |        |        |       |        |      |        |      |         |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
|----------|--|-------------|--------------|-------------|--------|--------|-------|--------|------|--------|------|---------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|----|---------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|
|          | Harmonic   |             |              |             |        |        |       |        |      |        |      |         |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
|          | U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz   |             |              |             |        |        |       |        |      |        |      |         |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| ANT      | CDD 4+5  |             |              |             |        |        |       |        |      |        |      |         |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| Pol.     | Horizontal   | Vertical    |              |             |        |        |       |        |      |        |      |         |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>44.91</td> <td>68.30</td> <td>-23.39</td> <td>58.99</td> <td>37.51</td> <td>15.52</td> <td>67.11</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>51.12</td> <td>74.00</td> <td>-22.88</td> <td>55.97</td> <td>40.20</td> <td>19.12</td> <td>64.17</td> <td>0.00</td> <td>103</td> <td>25</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15660.00</td> <td>39.49</td> <td>54.00</td> <td>-14.51</td> <td>44.35</td> <td>40.19</td> <td>19.12</td> <td>64.17</td> <td>0.00</td> <td>103</td> <td>25</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit       | Read         | Ant         | Cable  | Preamp | Aux   | APos   | TPos | Remark | Freq | Level   | Line Margin | Level Factor | Loss Factor | Factor |  |  |  | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 10440.00 | 44.91 | 68.30 | -23.39 | 58.99 | 37.51 | 15.52 | 67.11 | 0.00 | --- | --- | PEAK | 2 | 15660.00 | 51.12 | 74.00 | -22.88 | 55.97 | 40.20 | 19.12 | 64.17 | 0.00 | 103 | 25 | PEAK | 3 | 15660.00 | 39.49 | 54.00 | -14.51 | 44.35 | 40.19 | 19.12 | 64.17 | 0.00 | 103 | 25 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>54.34</td> <td>68.30</td> <td>-13.96</td> <td>68.42</td> <td>37.51</td> <td>15.52</td> <td>67.11</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>54.24</td> <td>74.00</td> <td>-19.76</td> <td>59.09</td> <td>40.20</td> <td>19.12</td> <td>64.17</td> <td>0.00</td> <td>101</td> <td>332</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15660.00</td> <td>41.64</td> <td>54.00</td> <td>-12.36</td> <td>46.50</td> <td>40.19</td> <td>19.12</td> <td>64.17</td> <td>0.00</td> <td>101</td> <td>332</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor |  |  |  | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 10440.00 | 54.34 | 68.30 | -13.96 | 68.42 | 37.51 | 15.52 | 67.11 | 0.00 | --- | --- | PEAK | 2 | 15660.00 | 54.24 | 74.00 | -19.76 | 59.09 | 40.20 | 19.12 | 64.17 | 0.00 | 101 | 332 | PEAK | 3 | 15660.00 | 41.64 | 54.00 | -12.36 | 46.50 | 40.19 | 19.12 | 64.17 | 0.00 | 101 | 332 | AVERAGE |
| Limit    | Read   | Ant         | Cable        | Preamp      | Aux    | APos   | TPos  | Remark |      |        |      |         |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| Freq     | Level  | Line Margin | Level Factor | Loss Factor | Factor |        |       |        |      |        |      |         |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| MHz      | dBuV/m   | dBuV/m      | dB           | dBuV        | dB/m   | dB     | dB    | cm     | deg  |        |      |         |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| 1        | 10440.00   | 44.91       | 68.30        | -23.39      | 58.99  | 37.51  | 15.52 | 67.11  | 0.00 | ---    | ---  | PEAK    |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| 2        | 15660.00   | 51.12       | 74.00        | -22.88      | 55.97  | 40.20  | 19.12 | 64.17  | 0.00 | 103    | 25   | PEAK    |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| 3        | 15660.00   | 39.49       | 54.00        | -14.51      | 44.35  | 40.19  | 19.12 | 64.17  | 0.00 | 103    | 25   | AVERAGE |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| Limit    | Read   | Ant         | Cable        | Preamp      | Aux    | APos   | TPos  | Remark |      |        |      |         |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| Freq     | Level  | Line Margin | Level Factor | Loss Factor | Factor |        |       |        |      |        |      |         |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| MHz      | dBuV/m   | dBuV/m      | dB           | dBuV        | dB/m   | dB     | dB    | cm     | deg  |        |      |         |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| 1        | 10440.00   | 54.34       | 68.30        | -13.96      | 68.42  | 37.51  | 15.52 | 67.11  | 0.00 | ---    | ---  | PEAK    |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| 2        | 15660.00   | 54.24       | 74.00        | -19.76      | 59.09  | 40.20  | 19.12 | 64.17  | 0.00 | 101    | 332  | PEAK    |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| 3        | 15660.00   | 41.64       | 54.00        | -12.36      | 46.50  | 40.19  | 19.12 | 64.17  | 0.00 | 101    | 332  | AVERAGE |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |    |      |   |          |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |        |      |       |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |



| Mode       | 12  |          |        |        |       |        |        |        |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |  |       |      |     |       |        |     |      |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |       |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |
|------------|---|----------|--------|--------|-------|--------|--------|--------|------|--------|------------|------|--------|-------|--------|------|--------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|--|-------|------|-----|-------|--------|-----|------|------|--------|------------|------|--------|-------|--------|------|--------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|------------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|
|            | Harmonic  |          |        |        |       |        |        |        |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |  |       |      |     |       |        |     |      |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |       |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |
|            | U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz  |          |        |        |       |        |        |        |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |  |       |      |     |       |        |     |      |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |       |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |
| ANT        | CDD 4+5   |          |        |        |       |        |        |        |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |  |       |      |     |       |        |     |      |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |       |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |
| Pol.       | Horizontal  | Vertical |        |        |       |        |        |        |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |  |       |      |     |       |        |     |      |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |       |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |
| Peak Avg   | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10477.10</td> <td>48.39</td> <td>68.30</td> <td>-19.91</td> <td>62.39</td> <td>37.54</td> <td>15.56</td> <td>67.10</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2 15715.30</td> <td>51.69</td> <td>74.00</td> <td>-22.31</td> <td>56.45</td> <td>40.25</td> <td>19.16</td> <td>64.17</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table> | Limit    | Read   | Ant    | Cable | Preamp | Aux    | APos   | TPos | Remark | Freq Level | Line | Margin | Level | Factor | Loss | Factor | Factor |  | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 10477.10 | 48.39 | 68.30 | -19.91 | 62.39 | 37.54 | 15.56 | 67.10 | 0.00 | --- | --- | Peak | 2 15715.30 | 51.69 | 74.00 | -22.31 | 56.45 | 40.25 | 19.16 | 64.17 | 0.00 | --- | --- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10476.00</td> <td>59.71</td> <td>68.30</td> <td>-8.59</td> <td>73.71</td> <td>37.54</td> <td>15.56</td> <td>67.10</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2 15720.00</td> <td>55.20</td> <td>74.00</td> <td>-18.80</td> <td>59.96</td> <td>40.25</td> <td>19.16</td> <td>64.17</td> <td>0.00</td> <td>105</td> <td>338</td> <td>PEAK</td> </tr> <tr> <td>3 15720.00</td> <td>40.76</td> <td>54.00</td> <td>-13.24</td> <td>45.52</td> <td>40.25</td> <td>19.16</td> <td>64.17</td> <td>0.00</td> <td>105</td> <td>338</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq Level | Line | Margin | Level | Factor | Loss | Factor | Factor |  | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 10476.00 | 59.71 | 68.30 | -8.59 | 73.71 | 37.54 | 15.56 | 67.10 | 0.00 | --- | --- | Peak | 2 15720.00 | 55.20 | 74.00 | -18.80 | 59.96 | 40.25 | 19.16 | 64.17 | 0.00 | 105 | 338 | PEAK | 3 15720.00 | 40.76 | 54.00 | -13.24 | 45.52 | 40.25 | 19.16 | 64.17 | 0.00 | 105 | 338 | AVERAGE |
| Limit      | Read  | Ant      | Cable  | Preamp | Aux   | APos   | TPos   | Remark |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |  |       |      |     |       |        |     |      |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |       |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |
| Freq Level | Line  | Margin   | Level  | Factor | Loss  | Factor | Factor |        |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |  |       |      |     |       |        |     |      |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |       |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |
| MHz        | dBuV/m  | dBuV/m   | dB     | dBuV   | dB/m  | dB     | dB     | cm     | deg  |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |  |       |      |     |       |        |     |      |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |       |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |
| 1 10477.10 | 48.39   | 68.30    | -19.91 | 62.39  | 37.54 | 15.56  | 67.10  | 0.00   | ---  | ---    | Peak       |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |  |       |      |     |       |        |     |      |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |       |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |
| 2 15715.30 | 51.69   | 74.00    | -22.31 | 56.45  | 40.25 | 19.16  | 64.17  | 0.00   | ---  | ---    | Peak       |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |  |       |      |     |       |        |     |      |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |       |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |
| Limit      | Read  | Ant      | Cable  | Preamp | Aux   | APos   | TPos   | Remark |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |  |       |      |     |       |        |     |      |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |       |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |
| Freq Level | Line  | Margin   | Level  | Factor | Loss  | Factor | Factor |        |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |  |       |      |     |       |        |     |      |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |       |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |
| MHz        | dBuV/m  | dBuV/m   | dB     | dBuV   | dB/m  | dB     | dB     | cm     | deg  |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |  |       |      |     |       |        |     |      |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |       |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |
| 1 10476.00 | 59.71   | 68.30    | -8.59  | 73.71  | 37.54 | 15.56  | 67.10  | 0.00   | ---  | ---    | Peak       |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |  |       |      |     |       |        |     |      |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |       |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |
| 2 15720.00 | 55.20   | 74.00    | -18.80 | 59.96  | 40.25 | 19.16  | 64.17  | 0.00   | 105  | 338    | PEAK       |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |  |       |      |     |       |        |     |      |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |       |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |
| 3 15720.00 | 40.76   | 54.00    | -13.24 | 45.52  | 40.25 | 19.16  | 64.17  | 0.00   | 105  | 338    | AVERAGE    |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |  |       |      |     |       |        |     |      |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |       |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |



| Mode       | 13  |          |        |        |       |        |        |        |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |  |       |      |     |       |        |     |      |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |       |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |
|------------|---|----------|--------|--------|-------|--------|--------|--------|------|--------|------------|------|--------|-------|--------|------|--------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|--|-------|------|-----|-------|--------|-----|------|------|--------|------------|------|--------|-------|--------|------|--------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|------------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|
|            | Harmonic  |          |        |        |       |        |        |        |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |  |       |      |     |       |        |     |      |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |       |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |
|            | U-NII-2A_5.25-5.35_802.11ax HE20_CH52_Full RU_5260MHz   |          |        |        |       |        |        |        |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |  |       |      |     |       |        |     |      |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |       |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |
| ANT        | CDD 4+5   |          |        |        |       |        |        |        |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |  |       |      |     |       |        |     |      |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |       |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |
| Pol.       | Horizontal  | Vertical |        |        |       |        |        |        |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |  |       |      |     |       |        |     |      |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |       |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |
| Peak Avg   | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10522.20</td> <td>50.32</td> <td>68.30</td> <td>-17.98</td> <td>64.23</td> <td>37.57</td> <td>15.60</td> <td>67.08</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2 15789.00</td> <td>50.24</td> <td>74.00</td> <td>-23.76</td> <td>54.89</td> <td>40.31</td> <td>19.21</td> <td>64.17</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table> | Limit    | Read   | Ant    | Cable | Preamp | Aux    | APos   | TPos | Remark | Freq Level | Line | Margin | Level | Factor | Loss | Factor | Factor |  | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 10522.20 | 50.32 | 68.30 | -17.98 | 64.23 | 37.57 | 15.60 | 67.08 | 0.00 | --- | --- | Peak | 2 15789.00 | 50.24 | 74.00 | -23.76 | 54.89 | 40.31 | 19.21 | 64.17 | 0.00 | --- | --- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10518.90</td> <td>59.94</td> <td>68.30</td> <td>-8.36</td> <td>73.85</td> <td>37.57</td> <td>15.60</td> <td>67.08</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2 15780.00</td> <td>54.96</td> <td>74.00</td> <td>-19.04</td> <td>59.63</td> <td>40.30</td> <td>19.20</td> <td>64.17</td> <td>0.00</td> <td>100</td> <td>338</td> <td>PEAK</td> </tr> <tr> <td>3 15780.00</td> <td>41.46</td> <td>54.00</td> <td>-12.54</td> <td>46.13</td> <td>40.30</td> <td>19.20</td> <td>64.17</td> <td>0.00</td> <td>100</td> <td>338</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq Level | Line | Margin | Level | Factor | Loss | Factor | Factor |  | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 10518.90 | 59.94 | 68.30 | -8.36 | 73.85 | 37.57 | 15.60 | 67.08 | 0.00 | --- | --- | Peak | 2 15780.00 | 54.96 | 74.00 | -19.04 | 59.63 | 40.30 | 19.20 | 64.17 | 0.00 | 100 | 338 | PEAK | 3 15780.00 | 41.46 | 54.00 | -12.54 | 46.13 | 40.30 | 19.20 | 64.17 | 0.00 | 100 | 338 | AVERAGE |
| Limit      | Read  | Ant      | Cable  | Preamp | Aux   | APos   | TPos   | Remark |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |  |       |      |     |       |        |     |      |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |       |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |
| Freq Level | Line  | Margin   | Level  | Factor | Loss  | Factor | Factor |        |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |  |       |      |     |       |        |     |      |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |       |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |
| MHz        | dBuV/m  | dBuV/m   | dB     | dBuV   | dB/m  | dB     | dB     | cm     | deg  |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |  |       |      |     |       |        |     |      |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |       |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |
| 1 10522.20 | 50.32   | 68.30    | -17.98 | 64.23  | 37.57 | 15.60  | 67.08  | 0.00   | ---  | ---    | Peak       |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |  |       |      |     |       |        |     |      |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |       |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |
| 2 15789.00 | 50.24   | 74.00    | -23.76 | 54.89  | 40.31 | 19.21  | 64.17  | 0.00   | ---  | ---    | Peak       |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |  |       |      |     |       |        |     |      |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |       |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |
| Limit      | Read  | Ant      | Cable  | Preamp | Aux   | APos   | TPos   | Remark |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |  |       |      |     |       |        |     |      |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |       |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |
| Freq Level | Line  | Margin   | Level  | Factor | Loss  | Factor | Factor |        |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |  |       |      |     |       |        |     |      |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |       |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |
| MHz        | dBuV/m  | dBuV/m   | dB     | dBuV   | dB/m  | dB     | dB     | cm     | deg  |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |  |       |      |     |       |        |     |      |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |       |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |
| 1 10518.90 | 59.94   | 68.30    | -8.36  | 73.85  | 37.57 | 15.60  | 67.08  | 0.00   | ---  | ---    | Peak       |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |  |       |      |     |       |        |     |      |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |       |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |
| 2 15780.00 | 54.96   | 74.00    | -19.04 | 59.63  | 40.30 | 19.20  | 64.17  | 0.00   | 100  | 338    | PEAK       |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |  |       |      |     |       |        |     |      |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |       |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |
| 3 15780.00 | 41.46   | 54.00    | -12.54 | 46.13  | 40.30 | 19.20  | 64.17  | 0.00   | 100  | 338    | AVERAGE    |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |  |       |      |     |       |        |     |      |      |        |            |      |        |       |        |      |        |        |  |     |        |        |    |      |      |    |    |    |     |            |       |       |       |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |         |



| Mode     | 14   |          |        |        |        |        |        |        |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
|----------|--|----------|--------|--------|--------|--------|--------|--------|------|--------|------|---------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|----------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|
|          | Harmonic   |          |        |        |        |        |        |        |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
|          | U-NII-2A_5.25-5.35_802.11ax HE20_CH60_Full RU_5300MHz  |          |        |        |        |        |        |        |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| ANT      | CDD 4+5  |          |        |        |        |        |        |        |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| Pol.     | Horizontal   | Vertical |        |        |        |        |        |        |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10604.70</td> <td>50.03</td> <td>74.00</td> <td>-23.97</td> <td>63.77</td> <td>37.63</td> <td>15.68</td> <td>67.05</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table> | Limit    | Read   | Ant    | Cable  | Preamp | Aux    | APos   | TPos | Remark | Freq | Level   | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | 1 | 10604.70 | 50.03 | 74.00 | -23.97 | 63.77 | 37.63 | 15.68 | 67.05 | 0.00 | --- | --- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.01</td> <td>57.82</td> <td>74.00</td> <td>-16.18</td> <td>71.58</td> <td>37.62</td> <td>15.67</td> <td>67.05</td> <td>0.00</td> <td>100</td> <td>119</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>10600.01</td> <td>46.09</td> <td>54.00</td> <td>-7.91</td> <td>59.85</td> <td>37.62</td> <td>15.67</td> <td>67.05</td> <td>0.00</td> <td>100</td> <td>119</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>15900.00</td> <td>52.81</td> <td>74.00</td> <td>-21.19</td> <td>57.30</td> <td>40.41</td> <td>19.28</td> <td>64.18</td> <td>0.00</td> <td>102</td> <td>343</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>15900.00</td> <td>38.94</td> <td>54.00</td> <td>-15.06</td> <td>43.43</td> <td>40.41</td> <td>19.28</td> <td>64.18</td> <td>0.00</td> <td>102</td> <td>343</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | 1 | 10600.01 | 57.82 | 74.00 | -16.18 | 71.58 | 37.62 | 15.67 | 67.05 | 0.00 | 100 | 119 | PEAK | 2 | 10600.01 | 46.09 | 54.00 | -7.91 | 59.85 | 37.62 | 15.67 | 67.05 | 0.00 | 100 | 119 | AVERAGE | 3 | 15900.00 | 52.81 | 74.00 | -21.19 | 57.30 | 40.41 | 19.28 | 64.18 | 0.00 | 102 | 343 | PEAK | 4 | 15900.00 | 38.94 | 54.00 | -15.06 | 43.43 | 40.41 | 19.28 | 64.18 | 0.00 | 102 | 343 | AVERAGE |
| Limit    | Read   | Ant      | Cable  | Preamp | Aux    | APos   | TPos   | Remark |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| Freq     | Level  | Line     | Margin | Level  | Factor | Loss   | Factor | Factor |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| MHz      | dBuV/m   | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB     | dB     | cm   | deg    |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| 1        | 10604.70   | 50.03    | 74.00  | -23.97 | 63.77  | 37.63  | 15.68  | 67.05  | 0.00 | ---    | ---  | Peak    |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| Limit    | Read   | Ant      | Cable  | Preamp | Aux    | APos   | TPos   | Remark |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| Freq     | Level  | Line     | Margin | Level  | Factor | Loss   | Factor | Factor |      |        |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| MHz      | dBuV/m   | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB     | dB     | cm   | deg    |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| 1        | 10600.01   | 57.82    | 74.00  | -16.18 | 71.58  | 37.62  | 15.67  | 67.05  | 0.00 | 100    | 119  | PEAK    |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| 2        | 10600.01   | 46.09    | 54.00  | -7.91  | 59.85  | 37.62  | 15.67  | 67.05  | 0.00 | 100    | 119  | AVERAGE |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| 3        | 15900.00   | 52.81    | 74.00  | -21.19 | 57.30  | 40.41  | 19.28  | 64.18  | 0.00 | 102    | 343  | PEAK    |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |
| 4        | 15900.00   | 38.94    | 54.00  | -15.06 | 43.43  | 40.41  | 19.28  | 64.18  | 0.00 | 102    | 343  | AVERAGE |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |       |       |       |       |       |      |     |     |         |   |          |       |       |        |       |       |       |       |      |     |     |      |   |          |       |       |        |       |       |       |       |      |     |     |         |



|       |   | 15  |        |        |        |        |        |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
|-------|---|---|--------|--------|--------|--------|--------|-------|------|------|-------|---------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|---|---------|-------|-------|-------|-------|-------|-------|-------|------|-----|----|---------|--|-------|------|-----|-------|--------|-----|------|------|------|-------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|---|---------|--------|-------|-------|--------|-------|-------|-------|------|-----|----|---------|
| Mode  |   | Band Edge   |        |        |        |        |        |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
|       |   | U-NII-2A_5.25-5.35_802.11ax HE20_CH64_Full RU_5320MHz |        |        |        |        |        |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| ANT   |   | CDD 4+5   |        |        |        |        |        |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Pol.  | Horizontal  | Fundamental   |        |        |        |        |        |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Peak  | <p>Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a signal between 5300 and 5400 MHz. A red line indicates the 5G BAND 1-3 limit at approximately 81.3 dBuV/m. A peak is observed at 5352.30 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5352.30</td> <td>65.91</td> <td>74.00</td> <td>-8.09</td> <td>57.30</td> <td>34.53</td> <td>10.75</td> <td>36.67</td> <td>0.00</td> <td>100</td> <td>76</td> <td>PEAK</td> </tr> </tbody> </table>       | Limit   | Read   | Ant    | Cable  | Preamp | Aux    | APos  | TPos | Freq | Level | Line    | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 5352.30 | 65.91 | 74.00 | -8.09 | 57.30 | 34.53 | 10.75 | 36.67 | 0.00 | 100 | 76 | PEAK    | <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. The plot shows a signal between 1000 and 7000 MHz. A red line indicates the 5G BAND 1-3 limit at approximately 81.3 dBuV/m. A sharp peak is observed at 5320.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>109.96</td> <td>68.30</td> <td>41.66</td> <td>101.48</td> <td>34.48</td> <td>10.73</td> <td>36.73</td> <td>0.00</td> <td>100</td> <td>76</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 5320.00 | 109.96 | 68.30 | 41.66 | 101.48 | 34.48 | 10.73 | 36.73 | 0.00 | 100 | 76 | PEAK    |
|       | Limit   | Read  | Ant    | Cable  | Preamp | Aux    | APos   | TPos  |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Freq  | Level   | Line  | Margin | Level  | Factor | Loss   | Factor |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| MHz   | dBuV/m  | dBuV/m  | dB     | dBuV   | dB/m   | dB     | dB     |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| 1     | 5352.30   | 65.91   | 74.00  | -8.09  | 57.30  | 34.53  | 10.75  | 36.67 | 0.00 | 100  | 76    | PEAK    |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Limit | Read  | Ant   | Cable  | Preamp | Aux    | APos   | TPos   |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Freq  | Level   | Line  | Margin | Level  | Factor | Loss   | Factor |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| MHz   | dBuV/m  | dBuV/m  | dB     | dBuV   | dB/m   | dB     | dB     |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| 1     | 5320.00   | 109.96  | 68.30  | 41.66  | 101.48 | 34.48  | 10.73  | 36.73 | 0.00 | 100  | 76    | PEAK    |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Avg   | <p>Level (dBuV/m) vs Frequency (MHz) for Average Horizontal polarization. The plot shows a signal between 5300 and 5400 MHz. A red line indicates the 5G BAND 1-3 (AVG) limit at approximately 81.3 dBuV/m. The signal is averaged.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.00</td> <td>50.42</td> <td>54.00</td> <td>-3.58</td> <td>41.82</td> <td>34.52</td> <td>10.75</td> <td>36.67</td> <td>0.00</td> <td>100</td> <td>76</td> <td>Average</td> </tr> </tbody> </table> | Limit   | Read   | Ant    | Cable  | Preamp | Aux    | APos  | TPos | Freq | Level | Line    | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 5350.00 | 50.42 | 54.00 | -3.58 | 41.82 | 34.52 | 10.75 | 36.67 | 0.00 | 100 | 76 | Average | <p>Level (dBuV/m) vs Frequency (MHz) for Average Fundamental polarization. The plot shows a signal between 1000 and 7000 MHz. A red line indicates the 5G BAND 1-3 (AVG) limit at approximately 81.3 dBuV/m. The signal is averaged.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>101.77</td> <td>68.30</td> <td>33.47</td> <td>93.29</td> <td>34.48</td> <td>10.73</td> <td>36.73</td> <td>0.00</td> <td>100</td> <td>76</td> <td>AVERAGE</td> </tr> </tbody> </table>  | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 5320.00 | 101.77 | 68.30 | 33.47 | 93.29  | 34.48 | 10.73 | 36.73 | 0.00 | 100 | 76 | AVERAGE |
|       | Limit   | Read  | Ant    | Cable  | Preamp | Aux    | APos   | TPos  |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Freq  | Level   | Line  | Margin | Level  | Factor | Loss   | Factor |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| MHz   | dBuV/m  | dBuV/m  | dB     | dBuV   | dB/m   | dB     | dB     |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| 1     | 5350.00   | 50.42   | 54.00  | -3.58  | 41.82  | 34.52  | 10.75  | 36.67 | 0.00 | 100  | 76    | Average |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Limit | Read  | Ant   | Cable  | Preamp | Aux    | APos   | TPos   |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Freq  | Level   | Line  | Margin | Level  | Factor | Loss   | Factor |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| MHz   | dBuV/m  | dBuV/m  | dB     | dBuV   | dB/m   | dB     | dB     |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| 1     | 5320.00   | 101.77  | 68.30  | 33.47  | 93.29  | 34.48  | 10.73  | 36.73 | 0.00 | 100  | 76    | AVERAGE |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |       |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |



|       |  | 15  |        |        |        |        |        |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
|-------|--|---|--------|--------|--------|--------|--------|-------|------|------|-------|---------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|--|-------|------|-----|-------|--------|-----|------|------|------|-------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|
| Mode  |  | Band Edge   |        |        |        |        |        |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
|       |  | U-NII-2A_5.25-5.35_802.11ax HE20_CH64_Full RU_5320MHz |        |        |        |        |        |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| ANT   |  | CDD 4+5   |        |        |        |        |        |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Pol.  | Vertical   | Fundamental   |        |        |        |        |        |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Peak  | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5353.30</td> <td>57.91</td> <td>74.00</td> <td>-16.09</td> <td>49.29</td> <td>34.53</td> <td>10.75</td> <td>36.66</td> <td>0.00</td> <td>393</td> <td>243</td> <td>PEAK</td> </tr> </tbody> </table>   | Limit   | Read   | Ant    | Cable  | Preamp | Aux    | APos  | TPos | Freq | Level | Line    | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 5353.30 | 57.91 | 74.00 | -16.09 | 49.29 | 34.53 | 10.75 | 36.66 | 0.00 | 393 | 243 | PEAK    | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>106.34</td> <td>68.30</td> <td>38.04</td> <td>97.84</td> <td>34.49</td> <td>10.73</td> <td>36.72</td> <td>0.00</td> <td>393</td> <td>243</td> <td>PEAK</td> </tr> </tbody> </table>   | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 5320.00 | 106.34 | 68.30 | 38.04 | 97.84 | 34.49 | 10.73 | 36.72 | 0.00 | 393 | 243 | PEAK    |
|       | Limit  | Read  | Ant    | Cable  | Preamp | Aux    | APos   | TPos  |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Freq  | Level  | Line  | Margin | Level  | Factor | Loss   | Factor |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| MHz   | dBuV/m   | dBuV/m  | dB     | dBuV   | dB/m   | dB     | dB     |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| 1     | 5353.30  | 57.91   | 74.00  | -16.09 | 49.29  | 34.53  | 10.75  | 36.66 | 0.00 | 393  | 243   | PEAK    |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Limit | Read   | Ant   | Cable  | Preamp | Aux    | APos   | TPos   |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Freq  | Level  | Line  | Margin | Level  | Factor | Loss   | Factor |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| MHz   | dBuV/m   | dBuV/m  | dB     | dBuV   | dB/m   | dB     | dB     |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| 1     | 5320.00  | 106.34  | 68.30  | 38.04  | 97.84  | 34.49  | 10.73  | 36.72 | 0.00 | 393  | 243   | PEAK    |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Avg   | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.20</td> <td>46.07</td> <td>54.00</td> <td>-7.93</td> <td>37.47</td> <td>34.52</td> <td>10.75</td> <td>36.67</td> <td>0.00</td> <td>393</td> <td>243</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit   | Read   | Ant    | Cable  | Preamp | Aux    | APos  | TPos | Freq | Level | Line    | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 5350.20 | 46.07 | 54.00 | -7.93  | 37.47 | 34.52 | 10.75 | 36.67 | 0.00 | 393 | 243 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>97.69</td> <td>68.30</td> <td>29.39</td> <td>89.21</td> <td>34.48</td> <td>10.73</td> <td>36.73</td> <td>0.00</td> <td>393</td> <td>243</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 5320.00 | 97.69  | 68.30 | 29.39 | 89.21 | 34.48 | 10.73 | 36.73 | 0.00 | 393 | 243 | AVERAGE |
|       | Limit  | Read  | Ant    | Cable  | Preamp | Aux    | APos   | TPos  |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Freq  | Level  | Line  | Margin | Level  | Factor | Loss   | Factor |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| MHz   | dBuV/m   | dBuV/m  | dB     | dBuV   | dB/m   | dB     | dB     |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| 1     | 5350.20  | 46.07   | 54.00  | -7.93  | 37.47  | 34.52  | 10.75  | 36.67 | 0.00 | 393  | 243   | AVERAGE |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Limit | Read   | Ant   | Cable  | Preamp | Aux    | APos   | TPos   |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Freq  | Level  | Line  | Margin | Level  | Factor | Loss   | Factor |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| MHz   | dBuV/m   | dBuV/m  | dB     | dBuV   | dB/m   | dB     | dB     |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| 1     | 5320.00  | 97.69   | 68.30  | 29.39  | 89.21  | 34.48  | 10.73  | 36.73 | 0.00 | 393  | 243   | AVERAGE |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |







| Mode       | 15   |          |        |        |        |        |        |        |                 |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |          |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |              |            |       |       |       |       |       |       |       |      |                 |            |       |       |        |       |       |       |       |      |              |            |       |       |        |       |       |       |       |      |                 |
|------------|--|----------|--------|--------|--------|--------|--------|--------|-----------------|--------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|------------|-------|-------|--------|-------|-------|-------|-------|------|----------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|------------|-------|-------|--------|-------|-------|-------|-------|------|--------------|------------|-------|-------|-------|-------|-------|-------|-------|------|-----------------|------------|-------|-------|--------|-------|-------|-------|-------|------|--------------|------------|-------|-------|--------|-------|-------|-------|-------|------|-----------------|
|            | Harmonic   |          |        |        |        |        |        |        |                 |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |          |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |              |            |       |       |       |       |       |       |       |      |                 |            |       |       |        |       |       |       |       |      |              |            |       |       |        |       |       |       |       |      |                 |
|            | U-NII-2A_5.25-5.35_802.11ax HE20_CH64_Full RU_5320MHz  |          |        |        |        |        |        |        |                 |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |          |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |              |            |       |       |       |       |       |       |       |      |                 |            |       |       |        |       |       |       |       |      |              |            |       |       |        |       |       |       |       |      |                 |
| ANT        | CDD 4+5  |          |        |        |        |        |        |        |                 |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |          |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |              |            |       |       |       |       |       |       |       |      |                 |            |       |       |        |       |       |       |       |      |              |            |       |       |        |       |       |       |       |      |                 |
| Pol.       | Horizontal   | Vertical |        |        |        |        |        |        |                 |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |          |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |              |            |       |       |       |       |       |       |       |      |                 |            |       |       |        |       |       |       |       |      |              |            |       |       |        |       |       |       |       |      |                 |
| Peak Avg   | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10636.60</td> <td>49.73</td> <td>74.00</td> <td>-24.27</td> <td>63.41</td> <td>37.65</td> <td>15.71</td> <td>67.04</td> <td>0.00</td> <td>--- Peak</td> </tr> </tbody> </table> | Limit    | Read   | Ant    | Cable  | Preamp | Aux    | APos   | TPos            | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 10636.60 | 49.73 | 74.00 | -24.27 | 63.41 | 37.65 | 15.71 | 67.04 | 0.00 | --- Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10640.00</td> <td>56.79</td> <td>74.00</td> <td>-17.21</td> <td>70.47</td> <td>37.65</td> <td>15.71</td> <td>67.04</td> <td>0.00</td> <td>102 125 PEAK</td> </tr> <tr> <td>2 10640.00</td> <td>45.62</td> <td>54.00</td> <td>-8.38</td> <td>59.30</td> <td>37.65</td> <td>15.71</td> <td>67.04</td> <td>0.00</td> <td>102 125 AVERAGE</td> </tr> <tr> <td>3 15960.00</td> <td>50.24</td> <td>74.00</td> <td>-23.76</td> <td>54.63</td> <td>40.47</td> <td>19.32</td> <td>64.18</td> <td>0.00</td> <td>113 346 PEAK</td> </tr> <tr> <td>4 15960.00</td> <td>37.47</td> <td>54.00</td> <td>-16.53</td> <td>41.86</td> <td>40.47</td> <td>19.32</td> <td>64.18</td> <td>0.00</td> <td>113 346 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 10640.00 | 56.79 | 74.00 | -17.21 | 70.47 | 37.65 | 15.71 | 67.04 | 0.00 | 102 125 PEAK | 2 10640.00 | 45.62 | 54.00 | -8.38 | 59.30 | 37.65 | 15.71 | 67.04 | 0.00 | 102 125 AVERAGE | 3 15960.00 | 50.24 | 74.00 | -23.76 | 54.63 | 40.47 | 19.32 | 64.18 | 0.00 | 113 346 PEAK | 4 15960.00 | 37.47 | 54.00 | -16.53 | 41.86 | 40.47 | 19.32 | 64.18 | 0.00 | 113 346 AVERAGE |
| Limit      | Read   | Ant      | Cable  | Preamp | Aux    | APos   | TPos   | Remark |                 |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |          |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |              |            |       |       |       |       |       |       |       |      |                 |            |       |       |        |       |       |       |       |      |              |            |       |       |        |       |       |       |       |      |                 |
| Freq       | Level  | Line     | Margin | Level  | Factor | Loss   | Factor | Factor |                 |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |          |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |              |            |       |       |       |       |       |       |       |      |                 |            |       |       |        |       |       |       |       |      |              |            |       |       |        |       |       |       |       |      |                 |
| MHz        | dBuV/m   | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB     | dB     |                 |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |          |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |              |            |       |       |       |       |       |       |       |      |                 |            |       |       |        |       |       |       |       |      |              |            |       |       |        |       |       |       |       |      |                 |
| 1 10636.60 | 49.73  | 74.00    | -24.27 | 63.41  | 37.65  | 15.71  | 67.04  | 0.00   | --- Peak        |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |          |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |              |            |       |       |       |       |       |       |       |      |                 |            |       |       |        |       |       |       |       |      |              |            |       |       |        |       |       |       |       |      |                 |
| Limit      | Read   | Ant      | Cable  | Preamp | Aux    | APos   | TPos   | Remark |                 |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |          |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |              |            |       |       |       |       |       |       |       |      |                 |            |       |       |        |       |       |       |       |      |              |            |       |       |        |       |       |       |       |      |                 |
| Freq       | Level  | Line     | Margin | Level  | Factor | Loss   | Factor | Factor |                 |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |          |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |              |            |       |       |       |       |       |       |       |      |                 |            |       |       |        |       |       |       |       |      |              |            |       |       |        |       |       |       |       |      |                 |
| MHz        | dBuV/m   | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB     | dB     |                 |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |          |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |              |            |       |       |       |       |       |       |       |      |                 |            |       |       |        |       |       |       |       |      |              |            |       |       |        |       |       |       |       |      |                 |
| 1 10640.00 | 56.79  | 74.00    | -17.21 | 70.47  | 37.65  | 15.71  | 67.04  | 0.00   | 102 125 PEAK    |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |          |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |              |            |       |       |       |       |       |       |       |      |                 |            |       |       |        |       |       |       |       |      |              |            |       |       |        |       |       |       |       |      |                 |
| 2 10640.00 | 45.62  | 54.00    | -8.38  | 59.30  | 37.65  | 15.71  | 67.04  | 0.00   | 102 125 AVERAGE |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |          |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |              |            |       |       |       |       |       |       |       |      |                 |            |       |       |        |       |       |       |       |      |              |            |       |       |        |       |       |       |       |      |                 |
| 3 15960.00 | 50.24  | 74.00    | -23.76 | 54.63  | 40.47  | 19.32  | 64.18  | 0.00   | 113 346 PEAK    |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |          |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |              |            |       |       |       |       |       |       |       |      |                 |            |       |       |        |       |       |       |       |      |              |            |       |       |        |       |       |       |       |      |                 |
| 4 15960.00 | 37.47  | 54.00    | -16.53 | 41.86  | 40.47  | 19.32  | 64.18  | 0.00   | 113 346 AVERAGE |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |          |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |              |            |       |       |       |       |       |       |       |      |                 |            |       |       |        |       |       |       |       |      |              |            |       |       |        |       |       |       |       |      |                 |





| Mode      | 16   |             |        |        |        |        |        |        |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |           |       |       |        |       |       |       |       |      |   |       |       |       |       |        |       |       |      |  |       |       |      |        |        |        |      |        |        |      |        |        |        |       |        |      |        |        |           |        |        |       |       |       |       |       |      |           |        |       |       |        |       |       |       |      |
|-----------|--|-------------|--------|--------|--------|--------|--------|--------|------|--------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|-----------|-------|-------|--------|-------|-------|-------|-------|------|---|-------|-------|-------|-------|--------|-------|-------|------|--|-------|-------|------|--------|--------|--------|------|--------|--------|------|--------|--------|--------|-------|--------|------|--------|--------|-----------|--------|--------|-------|-------|-------|-------|-------|------|-----------|--------|-------|-------|--------|-------|-------|-------|------|
|           | Band Edge - L  |             |        |        |        |        |        |        |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |           |       |       |        |       |       |       |       |      |   |       |       |       |       |        |       |       |      |  |       |       |      |        |        |        |      |        |        |      |        |        |        |       |        |      |        |        |           |        |        |       |       |       |       |       |      |           |        |       |       |        |       |       |       |      |
|           | U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Full RU_5500MHz  |             |        |        |        |        |        |        |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |           |       |       |        |       |       |       |       |      |   |       |       |       |       |        |       |       |      |  |       |       |      |        |        |        |      |        |        |      |        |        |        |       |        |      |        |        |           |        |        |       |       |       |       |       |      |           |        |       |       |        |       |       |       |      |
| ANT       | CDD 4+5  |             |        |        |        |        |        |        |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |           |       |       |        |       |       |       |       |      |   |       |       |       |       |        |       |       |      |  |       |       |      |        |        |        |      |        |        |      |        |        |        |       |        |      |        |        |           |        |        |       |       |       |       |       |      |           |        |       |       |        |       |       |       |      |
| Pol.      | Horizontal   | Fundamental |        |        |        |        |        |        |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |           |       |       |        |       |       |       |       |      |   |       |       |       |       |        |       |       |      |  |       |       |      |        |        |        |      |        |        |      |        |        |        |       |        |      |        |        |           |        |        |       |       |       |       |       |      |           |        |       |       |        |       |       |       |      |
| Peak      | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5446.16</td> <td>56.00</td> <td>74.00</td> <td>-18.00</td> <td>47.09</td> <td>34.58</td> <td>10.82</td> <td>36.49</td> <td>0.00</td> </tr> <tr> <td>2 5468.88</td> <td>64.63</td> <td>68.30</td> <td>-3.67</td> <td>55.66</td> <td>34.57</td> <td>10.85</td> <td>36.45</td> <td>0.00</td> </tr> </tbody> </table> | Limit       | Read   | Ant    | Cable  | Preamp | Aux    | APos   | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 5446.16 | 56.00 | 74.00 | -18.00 | 47.09 | 34.58 | 10.82 | 36.49 | 0.00 | 2 5468.88   | 64.63 | 68.30 | -3.67 | 55.66 | 34.57  | 10.85 | 36.45 | 0.00 | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5500.00</td> <td>111.28</td> <td>68.30</td> <td>42.98</td> <td>102.24</td> <td>34.56</td> <td>10.88</td> <td>36.40</td> <td>0.00</td> </tr> </tbody> </table> | Limit | Read  | Ant  | Cable  | Preamp | Aux    | APos | TPos   | Remark | Freq | Level  | Line   | Margin | Level | Factor | Loss | Factor | Factor | MHz       | dBuV/m | dBuV/m | dB    | dBuV  | dB/m  | dB    | dB    | dB   | 1 5500.00 | 111.28 | 68.30 | 42.98 | 102.24 | 34.56 | 10.88 | 36.40 | 0.00 |
| Limit     | Read   | Ant         | Cable  | Preamp | Aux    | APos   | TPos   | Remark |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |           |       |       |        |       |       |       |       |      |   |       |       |       |       |        |       |       |      |  |       |       |      |        |        |        |      |        |        |      |        |        |        |       |        |      |        |        |           |        |        |       |       |       |       |       |      |           |        |       |       |        |       |       |       |      |
| Freq      | Level  | Line        | Margin | Level  | Factor | Loss   | Factor | Factor |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |           |       |       |        |       |       |       |       |      |   |       |       |       |       |        |       |       |      |  |       |       |      |        |        |        |      |        |        |      |        |        |        |       |        |      |        |        |           |        |        |       |       |       |       |       |      |           |        |       |       |        |       |       |       |      |
| MHz       | dBuV/m   | dBuV/m      | dB     | dBuV   | dB/m   | dB     | dB     | dB     |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |           |       |       |        |       |       |       |       |      |   |       |       |       |       |        |       |       |      |  |       |       |      |        |        |        |      |        |        |      |        |        |        |       |        |      |        |        |           |        |        |       |       |       |       |       |      |           |        |       |       |        |       |       |       |      |
| 1 5446.16 | 56.00  | 74.00       | -18.00 | 47.09  | 34.58  | 10.82  | 36.49  | 0.00   |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |           |       |       |        |       |       |       |       |      |   |       |       |       |       |        |       |       |      |  |       |       |      |        |        |        |      |        |        |      |        |        |        |       |        |      |        |        |           |        |        |       |       |       |       |       |      |           |        |       |       |        |       |       |       |      |
| 2 5468.88 | 64.63  | 68.30       | -3.67  | 55.66  | 34.57  | 10.85  | 36.45  | 0.00   |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |           |       |       |        |       |       |       |       |      |   |       |       |       |       |        |       |       |      |  |       |       |      |        |        |        |      |        |        |      |        |        |        |       |        |      |        |        |           |        |        |       |       |       |       |       |      |           |        |       |       |        |       |       |       |      |
| Limit     | Read   | Ant         | Cable  | Preamp | Aux    | APos   | TPos   | Remark |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |           |       |       |        |       |       |       |       |      |   |       |       |       |       |        |       |       |      |  |       |       |      |        |        |        |      |        |        |      |        |        |        |       |        |      |        |        |           |        |        |       |       |       |       |       |      |           |        |       |       |        |       |       |       |      |
| Freq      | Level  | Line        | Margin | Level  | Factor | Loss   | Factor | Factor |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |           |       |       |        |       |       |       |       |      |   |       |       |       |       |        |       |       |      |  |       |       |      |        |        |        |      |        |        |      |        |        |        |       |        |      |        |        |           |        |        |       |       |       |       |       |      |           |        |       |       |        |       |       |       |      |
| MHz       | dBuV/m   | dBuV/m      | dB     | dBuV   | dB/m   | dB     | dB     | dB     |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |           |       |       |        |       |       |       |       |      |   |       |       |       |       |        |       |       |      |  |       |       |      |        |        |        |      |        |        |      |        |        |        |       |        |      |        |        |           |        |        |       |       |       |       |       |      |           |        |       |       |        |       |       |       |      |
| 1 5500.00 | 111.28   | 68.30       | 42.98  | 102.24 | 34.56  | 10.88  | 36.40  | 0.00   |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |           |       |       |        |       |       |       |       |      |   |       |       |       |       |        |       |       |      |  |       |       |      |        |        |        |      |        |        |      |        |        |        |       |        |      |        |        |           |        |        |       |       |       |       |       |      |           |        |       |       |        |       |       |       |      |
| Avg       | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5455.92</td> <td>47.75</td> <td>54.00</td> <td>-6.25</td> <td>38.00</td> <td>34.58</td> <td>10.84</td> <td>36.47</td> <td>0.00</td> </tr> </tbody> </table>   | Limit       | Read   | Ant    | Cable  | Preamp | Aux    | APos   | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 5455.92 | 47.75 | 54.00 | -6.25  | 38.00 | 34.58 | 10.84 | 36.47 | 0.00 | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5500.00</td> <td>104.63</td> <td>68.30</td> <td>36.33</td> <td>95.57</td> <td>34.56</td> <td>10.89</td> <td>36.39</td> <td>0.00</td> </tr> </tbody> </table> | Limit | Read  | Ant   | Cable | Preamp | Aux   | APos  | TPos | Remark   | Freq  | Level | Line | Margin | Level  | Factor | Loss | Factor | Factor | MHz  | dBuV/m | dBuV/m | dB     | dBuV  | dB/m   | dB   | dB     | dB     | 1 5500.00 | 104.63 | 68.30  | 36.33 | 95.57 | 34.56 | 10.89 | 36.39 | 0.00 |           |        |       |       |        |       |       |       |      |
| Limit     | Read   | Ant         | Cable  | Preamp | Aux    | APos   | TPos   | Remark |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |           |       |       |        |       |       |       |       |      |   |       |       |       |       |        |       |       |      |  |       |       |      |        |        |        |      |        |        |      |        |        |        |       |        |      |        |        |           |        |        |       |       |       |       |       |      |           |        |       |       |        |       |       |       |      |
| Freq      | Level  | Line        | Margin | Level  | Factor | Loss   | Factor | Factor |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |           |       |       |        |       |       |       |       |      |   |       |       |       |       |        |       |       |      |  |       |       |      |        |        |        |      |        |        |      |        |        |        |       |        |      |        |        |           |        |        |       |       |       |       |       |      |           |        |       |       |        |       |       |       |      |
| MHz       | dBuV/m   | dBuV/m      | dB     | dBuV   | dB/m   | dB     | dB     | dB     |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |           |       |       |        |       |       |       |       |      |   |       |       |       |       |        |       |       |      |  |       |       |      |        |        |        |      |        |        |      |        |        |        |       |        |      |        |        |           |        |        |       |       |       |       |       |      |           |        |       |       |        |       |       |       |      |
| 1 5455.92 | 47.75  | 54.00       | -6.25  | 38.00  | 34.58  | 10.84  | 36.47  | 0.00   |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |           |       |       |        |       |       |       |       |      |   |       |       |       |       |        |       |       |      |  |       |       |      |        |        |        |      |        |        |      |        |        |        |       |        |      |        |        |           |        |        |       |       |       |       |       |      |           |        |       |       |        |       |       |       |      |
| Limit     | Read   | Ant         | Cable  | Preamp | Aux    | APos   | TPos   | Remark |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |           |       |       |        |       |       |       |       |      |   |       |       |       |       |        |       |       |      |  |       |       |      |        |        |        |      |        |        |      |        |        |        |       |        |      |        |        |           |        |        |       |       |       |       |       |      |           |        |       |       |        |       |       |       |      |
| Freq      | Level  | Line        | Margin | Level  | Factor | Loss   | Factor | Factor |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |           |       |       |        |       |       |       |       |      |   |       |       |       |       |        |       |       |      |  |       |       |      |        |        |        |      |        |        |      |        |        |        |       |        |      |        |        |           |        |        |       |       |       |       |       |      |           |        |       |       |        |       |       |       |      |
| MHz       | dBuV/m   | dBuV/m      | dB     | dBuV   | dB/m   | dB     | dB     | dB     |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |           |       |       |        |       |       |       |       |      |   |       |       |       |       |        |       |       |      |  |       |       |      |        |        |        |      |        |        |      |        |        |        |       |        |      |        |        |           |        |        |       |       |       |       |       |      |           |        |       |       |        |       |       |       |      |
| 1 5500.00 | 104.63   | 68.30       | 36.33  | 95.57  | 34.56  | 10.89  | 36.39  | 0.00   |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |           |       |       |        |       |       |       |       |      |   |       |       |       |       |        |       |       |      |  |       |       |      |        |        |        |      |        |        |      |        |        |        |       |        |      |        |        |           |        |        |       |       |       |       |       |      |           |        |       |       |        |       |       |       |      |

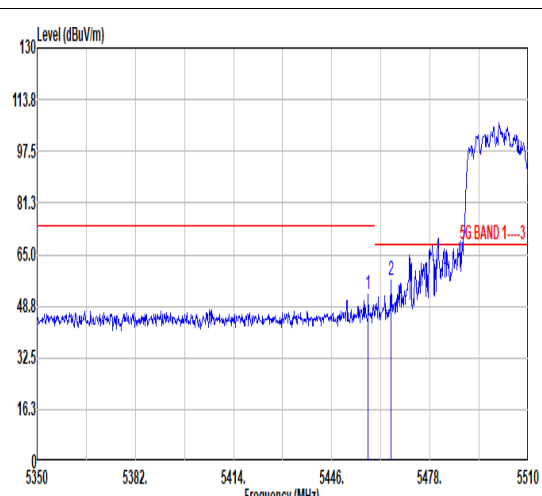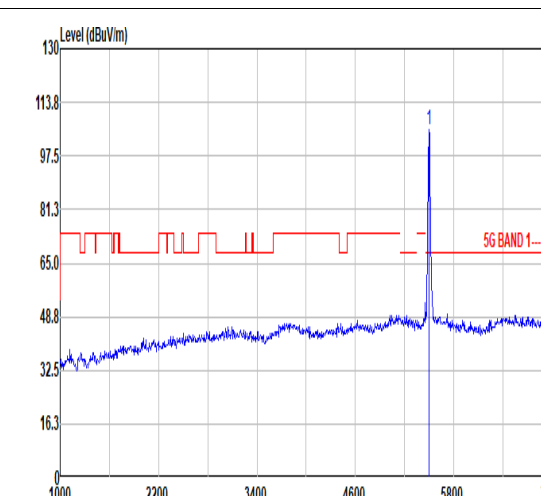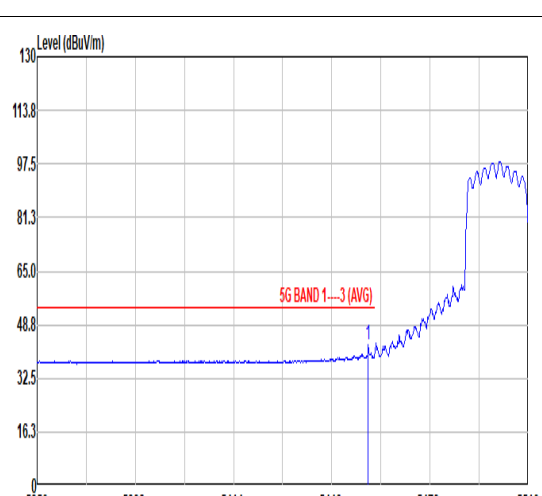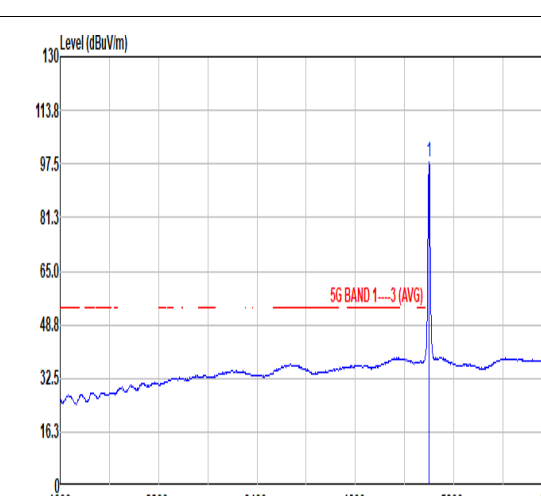

| Mode  | 16   |             |        |        |        |        |        |        |      |     |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |         |       |       |        |        |       |       |       |      |      |       |      |  |       |        |      |        |        |     |        |        |    |      |       |      |        |       |        |         |        |        |       |        |        |       |       |      |     |     |         |   |         |        |       |       |       |       |       |       |      |     |     |      |
|-------|--|-------------|--------|--------|--------|--------|--------|--------|------|-----|------|---------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|---|---------|-------|-------|--------|--------|-------|-------|-------|------|------|-------|------|--|-------|--------|------|--------|--------|-----|--------|--------|----|------|-------|------|--------|-------|--------|---------|--------|--------|-------|--------|--------|-------|-------|------|-----|-----|---------|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|
|       | Band Edge - L  |             |        |        |        |        |        |        |      |     |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |         |       |       |        |        |       |       |       |      |      |       |      |  |       |        |      |        |        |     |        |        |    |      |       |      |        |       |        |         |        |        |       |        |        |       |       |      |     |     |         |   |         |        |       |       |       |       |       |       |      |     |     |      |
|       | U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Full RU_5500MHz  |             |        |        |        |        |        |        |      |     |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |         |       |       |        |        |       |       |       |      |      |       |      |  |       |        |      |        |        |     |        |        |    |      |       |      |        |       |        |         |        |        |       |        |        |       |       |      |     |     |         |   |         |        |       |       |       |       |       |       |      |     |     |      |
| ANT   | CDD 4+5  |             |        |        |        |        |        |        |      |     |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |         |       |       |        |        |       |       |       |      |      |       |      |  |       |        |      |        |        |     |        |        |    |      |       |      |        |       |        |         |        |        |       |        |        |       |       |      |     |     |         |   |         |        |       |       |       |       |       |       |      |     |     |      |
| Pol.  | Vertical   | Fundamental |        |        |        |        |        |        |      |     |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |         |       |       |        |        |       |       |       |      |      |       |      |  |       |        |      |        |        |     |        |        |    |      |       |      |        |       |        |         |        |        |       |        |        |       |       |      |     |     |         |   |         |        |       |       |       |       |       |       |      |     |     |      |
| Peak  |  <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.84</td> <td>52.40</td> <td>74.00</td> <td>-21.60</td> <td>43.45</td> <td>34.58</td> <td>10.84</td> <td>36.47</td> <td>0.00</td> <td>300</td> <td>133</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5465.36</td> <td>57.04</td> <td>68.30</td> <td>-11.26</td> <td>48.06</td> <td>34.58</td> <td>10.85</td> <td>36.45</td> <td>0.00</td> <td>300</td> <td>133</td> <td>PEAK</td> </tr> </tbody> </table> | Limit       | Read   | Ant    | Cable  | Preamp | Aux    | APos   | TPos |     | Freq | Level   | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 | 5457.84 | 52.40 | 74.00 | -21.60 | 43.45 | 34.58 | 10.84 | 36.47 | 0.00 | 300 | 133 | PEAK    | 2   | 5465.36 | 57.04 | 68.30 | -11.26 | 48.06  | 34.58 | 10.85 | 36.45 | 0.00 | 300  | 133   | PEAK |  <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>105.37</td> <td>68.30</td> <td>37.07</td> <td>96.31</td> <td>34.56</td> <td>10.89</td> <td>36.39</td> <td>0.00</td> <td>300</td> <td>133</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read   | Ant  | Cable  | Preamp | Aux | APos   | TPos   |    | Freq | Level | Line | Margin | Level | Factor | Loss    | Factor | Factor | MHz   | dBuV/m | dBuV/m | dB    | dBuV  | dB/m | dB  | dB  | dB      | 1 | 5500.00 | 105.37 | 68.30 | 37.07 | 96.31 | 34.56 | 10.89 | 36.39 | 0.00 | 300 | 133 | PEAK |
|       | Limit  | Read        | Ant    | Cable  | Preamp | Aux    | APos   | TPos   |      |     |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |         |       |       |        |        |       |       |       |      |      |       |      |  |       |        |      |        |        |     |        |        |    |      |       |      |        |       |        |         |        |        |       |        |        |       |       |      |     |     |         |   |         |        |       |       |       |       |       |       |      |     |     |      |
| Freq  | Level  | Line        | Margin | Level  | Factor | Loss   | Factor | Factor |      |     |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |         |       |       |        |        |       |       |       |      |      |       |      |  |       |        |      |        |        |     |        |        |    |      |       |      |        |       |        |         |        |        |       |        |        |       |       |      |     |     |         |   |         |        |       |       |       |       |       |       |      |     |     |      |
| MHz   | dBuV/m   | dBuV/m      | dB     | dBuV   | dB/m   | dB     | dB     | dB     |      |     |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |         |       |       |        |        |       |       |       |      |      |       |      |  |       |        |      |        |        |     |        |        |    |      |       |      |        |       |        |         |        |        |       |        |        |       |       |      |     |     |         |   |         |        |       |       |       |       |       |       |      |     |     |      |
| 1     | 5457.84  | 52.40       | 74.00  | -21.60 | 43.45  | 34.58  | 10.84  | 36.47  | 0.00 | 300 | 133  | PEAK    |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |         |       |       |        |        |       |       |       |      |      |       |      |  |       |        |      |        |        |     |        |        |    |      |       |      |        |       |        |         |        |        |       |        |        |       |       |      |     |     |         |   |         |        |       |       |       |       |       |       |      |     |     |      |
| 2     | 5465.36  | 57.04       | 68.30  | -11.26 | 48.06  | 34.58  | 10.85  | 36.45  | 0.00 | 300 | 133  | PEAK    |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |         |       |       |        |        |       |       |       |      |      |       |      |  |       |        |      |        |        |     |        |        |    |      |       |      |        |       |        |         |        |        |       |        |        |       |       |      |     |     |         |   |         |        |       |       |       |       |       |       |      |     |     |      |
| Limit | Read   | Ant         | Cable  | Preamp | Aux    | APos   | TPos   |        |      |     |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |         |       |       |        |        |       |       |       |      |      |       |      |  |       |        |      |        |        |     |        |        |    |      |       |      |        |       |        |         |        |        |       |        |        |       |       |      |     |     |         |   |         |        |       |       |       |       |       |       |      |     |     |      |
| Freq  | Level  | Line        | Margin | Level  | Factor | Loss   | Factor | Factor |      |     |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |         |       |       |        |        |       |       |       |      |      |       |      |  |       |        |      |        |        |     |        |        |    |      |       |      |        |       |        |         |        |        |       |        |        |       |       |      |     |     |         |   |         |        |       |       |       |       |       |       |      |     |     |      |
| MHz   | dBuV/m   | dBuV/m      | dB     | dBuV   | dB/m   | dB     | dB     | dB     |      |     |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |         |       |       |        |        |       |       |       |      |      |       |      |  |       |        |      |        |        |     |        |        |    |      |       |      |        |       |        |         |        |        |       |        |        |       |       |      |     |     |         |   |         |        |       |       |       |       |       |       |      |     |     |      |
| 1     | 5500.00  | 105.37      | 68.30  | 37.07  | 96.31  | 34.56  | 10.89  | 36.39  | 0.00 | 300 | 133  | PEAK    |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |         |       |       |        |        |       |       |       |      |      |       |      |  |       |        |      |        |        |     |        |        |    |      |       |      |        |       |        |         |        |        |       |        |        |       |       |      |     |     |         |   |         |        |       |       |       |       |       |       |      |     |     |      |
| Avg   |  <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.84</td> <td>42.67</td> <td>54.00</td> <td>-11.33</td> <td>33.72</td> <td>34.58</td> <td>10.84</td> <td>36.47</td> <td>0.00</td> <td>300</td> <td>133</td> <td>AVERAGE</td> </tr> </tbody> </table>  | Limit       | Read   | Ant    | Cable  | Preamp | Aux    | APos   | TPos |     | Freq | Level   | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 | 5457.84 | 42.67 | 54.00 | -11.33 | 33.72 | 34.58 | 10.84 | 36.47 | 0.00 | 300 | 133 | AVERAGE |  <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>98.26</td> <td>68.30</td> <td>29.96</td> <td>89.20</td> <td>34.56</td> <td>10.89</td> <td>36.39</td> <td>0.00</td> <td>300</td> <td>133</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit   | Read  | Ant   | Cable  | Preamp | Aux   | APos  | TPos  |      | Freq | Level | Line | Margin   | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m  | dB   | dB     | dB    | 1      | 5500.00 | 98.26  | 68.30  | 29.96 | 89.20  | 34.56  | 10.89 | 36.39 | 0.00 | 300 | 133 | AVERAGE |   |         |        |       |       |       |       |       |       |      |     |     |      |
| Limit | Read   | Ant         | Cable  | Preamp | Aux    | APos   | TPos   |        |      |     |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |         |       |       |        |        |       |       |       |      |      |       |      |  |       |        |      |        |        |     |        |        |    |      |       |      |        |       |        |         |        |        |       |        |        |       |       |      |     |     |         |   |         |        |       |       |       |       |       |       |      |     |     |      |
| Freq  | Level  | Line        | Margin | Level  | Factor | Loss   | Factor | Factor |      |     |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |         |       |       |        |        |       |       |       |      |      |       |      |  |       |        |      |        |        |     |        |        |    |      |       |      |        |       |        |         |        |        |       |        |        |       |       |      |     |     |         |   |         |        |       |       |       |       |       |       |      |     |     |      |
| MHz   | dBuV/m   | dBuV/m      | dB     | dBuV   | dB/m   | dB     | dB     | dB     |      |     |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |         |       |       |        |        |       |       |       |      |      |       |      |  |       |        |      |        |        |     |        |        |    |      |       |      |        |       |        |         |        |        |       |        |        |       |       |      |     |     |         |   |         |        |       |       |       |       |       |       |      |     |     |      |
| 1     | 5457.84  | 42.67       | 54.00  | -11.33 | 33.72  | 34.58  | 10.84  | 36.47  | 0.00 | 300 | 133  | AVERAGE |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |         |       |       |        |        |       |       |       |      |      |       |      |  |       |        |      |        |        |     |        |        |    |      |       |      |        |       |        |         |        |        |       |        |        |       |       |      |     |     |         |   |         |        |       |       |       |       |       |       |      |     |     |      |
| Limit | Read   | Ant         | Cable  | Preamp | Aux    | APos   | TPos   |        |      |     |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |         |       |       |        |        |       |       |       |      |      |       |      |  |       |        |      |        |        |     |        |        |    |      |       |      |        |       |        |         |        |        |       |        |        |       |       |      |     |     |         |   |         |        |       |       |       |       |       |       |      |     |     |      |
| Freq  | Level  | Line        | Margin | Level  | Factor | Loss   | Factor | Factor |      |     |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |         |       |       |        |        |       |       |       |      |      |       |      |  |       |        |      |        |        |     |        |        |    |      |       |      |        |       |        |         |        |        |       |        |        |       |       |      |     |     |         |   |         |        |       |       |       |       |       |       |      |     |     |      |
| MHz   | dBuV/m   | dBuV/m      | dB     | dBuV   | dB/m   | dB     | dB     | dB     |      |     |      |         |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |         |       |       |        |        |       |       |       |      |      |       |      |  |       |        |      |        |        |     |        |        |    |      |       |      |        |       |        |         |        |        |       |        |        |       |       |      |     |     |         |   |         |        |       |       |       |       |       |       |      |     |     |      |
| 1     | 5500.00  | 98.26       | 68.30  | 29.96  | 89.20  | 34.56  | 10.89  | 36.39  | 0.00 | 300 | 133  | AVERAGE |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |         |       |       |        |        |       |       |       |      |      |       |      |  |       |        |      |        |        |     |        |        |    |      |       |      |        |       |        |         |        |        |       |        |        |       |       |      |     |     |         |   |         |        |       |       |       |       |       |       |      |     |     |      |






| Mode        | 16  |          |        |        |        |        |        |        |      |        |         |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
|-------------|---|----------|--------|--------|--------|--------|--------|--------|------|--------|---------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|-----|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|---|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|-----|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|------|------------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|
|             | Harmonic  |          |        |        |        |        |        |        |      |        |         |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
|             | U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Full RU_5500MHz   |          |        |        |        |        |        |        |      |        |         |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
| ANT         | CDD 4+5   |          |        |        |        |        |        |        |      |        |         |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
| Pol.        | Horizontal  | Vertical |        |        |        |        |        |        |      |        |         |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
| Peak<br>Avg |   |          |        |        |        |        |        |        |      |        |         |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
|             | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10998.50</td> <td>48.42</td> <td>74.00</td> <td>-25.58</td> <td>61.39</td> <td>37.90</td> <td>16.04</td> <td>66.91</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table> | Limit    | Read   | Ant    | Cable  | Preamp | Aux    | APos   | TPos | Remark | Freq    | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 10998.50 | 48.42 | 74.00 | -25.58 | 61.39 | 37.90 | 16.04 | 66.91 | 0.00 | --- | --- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11000.00</td> <td>50.60</td> <td>74.00</td> <td>-23.40</td> <td>63.57</td> <td>37.90</td> <td>16.04</td> <td>66.91</td> <td>0.00</td> <td>100</td> <td>304</td> <td>PEAK</td> </tr> <tr> <td>2 11000.00</td> <td>40.16</td> <td>54.00</td> <td>-13.84</td> <td>53.13</td> <td>37.90</td> <td>16.04</td> <td>66.91</td> <td>0.00</td> <td>100</td> <td>304</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 11000.00 | 50.60 | 74.00 | -23.40 | 63.57 | 37.90 | 16.04 | 66.91 | 0.00 | 100 | 304 | PEAK | 2 11000.00 | 40.16 | 54.00 | -13.84 | 53.13 | 37.90 | 16.04 | 66.91 | 0.00 | 100 | 304 |
| Limit       | Read  | Ant      | Cable  | Preamp | Aux    | APos   | TPos   | Remark |      |        |         |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
| Freq        | Level   | Line     | Margin | Level  | Factor | Loss   | Factor | Factor |      |        |         |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
| MHz         | dBuV/m  | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB     | cm     | deg  |        |         |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
| 1 10998.50  | 48.42   | 74.00    | -25.58 | 61.39  | 37.90  | 16.04  | 66.91  | 0.00   | ---  | ---    | Peak    |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
| Limit       | Read  | Ant      | Cable  | Preamp | Aux    | APos   | TPos   | Remark |      |        |         |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
| Freq        | Level   | Line     | Margin | Level  | Factor | Loss   | Factor | Factor |      |        |         |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
| MHz         | dBuV/m  | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB     | cm     | deg  |        |         |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
| 1 11000.00  | 50.60   | 74.00    | -23.40 | 63.57  | 37.90  | 16.04  | 66.91  | 0.00   | 100  | 304    | PEAK    |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |
| 2 11000.00  | 40.16   | 54.00    | -13.84 | 53.13  | 37.90  | 16.04  | 66.91  | 0.00   | 100  | 304    | AVERAGE |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |     |            |       |       |        |       |       |       |       |      |     |     |      |            |       |       |        |       |       |       |       |      |     |     |



| Mode       | 17  |             |              |             |        |        |       |        |      |        |      |       |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |  |       |      |     |       |        |     |      |      |        |      |       |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |            |       |       |        |       |       |       |       |      |
|------------|---|-------------|--------------|-------------|--------|--------|-------|--------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|------------|-------|-------|--------|-------|-------|-------|-------|------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|-------------|--------------|-------------|--------|--|--|--|-----|--------|--------|----|------|------|----|----|----|------------|-------|-------|--------|-------|-------|-------|-------|------|------------|-------|-------|--------|-------|-------|-------|-------|------|
|            | Harmonic  |             |              |             |        |        |       |        |      |        |      |       |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |  |       |      |     |       |        |     |      |      |        |      |       |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |            |       |       |        |       |       |       |       |      |
|            | U-NII-2C_5.47-5.725_802.11ax HE20_CH116_Full RU_5580MHz   |             |              |             |        |        |       |        |      |        |      |       |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |  |       |      |     |       |        |     |      |      |        |      |       |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |            |       |       |        |       |       |       |       |      |
| ANT        | CDD 4+5   |             |              |             |        |        |       |        |      |        |      |       |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |  |       |      |     |       |        |     |      |      |        |      |       |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |            |       |       |        |       |       |       |       |      |
| Pol.       | Horizontal  | Vertical    |              |             |        |        |       |        |      |        |      |       |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |  |       |      |     |       |        |     |      |      |        |      |       |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |            |       |       |        |       |       |       |       |      |
| Peak Avg   | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11160.00</td> <td>44.44</td> <td>74.00</td> <td>-29.56</td> <td>57.11</td> <td>38.03</td> <td>16.15</td> <td>66.85</td> <td>0.00</td> </tr> </tbody> </table> | Limit       | Read         | Ant         | Cable  | Preamp | Aux   | APos   | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor |  |  |  | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 11160.00 | 44.44 | 74.00 | -29.56 | 57.11 | 38.03 | 16.15 | 66.85 | 0.00 | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11160.00</td> <td>49.33</td> <td>74.00</td> <td>-24.67</td> <td>62.00</td> <td>38.03</td> <td>16.15</td> <td>66.85</td> <td>0.00</td> </tr> <tr> <td>2 11160.00</td> <td>38.77</td> <td>54.00</td> <td>-15.23</td> <td>51.44</td> <td>38.03</td> <td>16.15</td> <td>66.85</td> <td>0.00</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor |  |  |  | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 11160.00 | 49.33 | 74.00 | -24.67 | 62.00 | 38.03 | 16.15 | 66.85 | 0.00 | 2 11160.00 | 38.77 | 54.00 | -15.23 | 51.44 | 38.03 | 16.15 | 66.85 | 0.00 |
| Limit      | Read  | Ant         | Cable        | Preamp      | Aux    | APos   | TPos  | Remark |      |        |      |       |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |  |       |      |     |       |        |     |      |      |        |      |       |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |            |       |       |        |       |       |       |       |      |
| Freq       | Level   | Line Margin | Level Factor | Loss Factor | Factor |        |       |        |      |        |      |       |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |  |       |      |     |       |        |     |      |      |        |      |       |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |            |       |       |        |       |       |       |       |      |
| MHz        | dBuV/m  | dBuV/m      | dB           | dBuV        | dB/m   | dB     | dB    | dB     |      |        |      |       |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |  |       |      |     |       |        |     |      |      |        |      |       |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |            |       |       |        |       |       |       |       |      |
| 1 11160.00 | 44.44   | 74.00       | -29.56       | 57.11       | 38.03  | 16.15  | 66.85 | 0.00   |      |        |      |       |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |  |       |      |     |       |        |     |      |      |        |      |       |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |            |       |       |        |       |       |       |       |      |
| Limit      | Read  | Ant         | Cable        | Preamp      | Aux    | APos   | TPos  | Remark |      |        |      |       |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |  |       |      |     |       |        |     |      |      |        |      |       |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |            |       |       |        |       |       |       |       |      |
| Freq       | Level   | Line Margin | Level Factor | Loss Factor | Factor |        |       |        |      |        |      |       |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |  |       |      |     |       |        |     |      |      |        |      |       |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |            |       |       |        |       |       |       |       |      |
| MHz        | dBuV/m  | dBuV/m      | dB           | dBuV        | dB/m   | dB     | dB    | dB     |      |        |      |       |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |  |       |      |     |       |        |     |      |      |        |      |       |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |            |       |       |        |       |       |       |       |      |
| 1 11160.00 | 49.33   | 74.00       | -24.67       | 62.00       | 38.03  | 16.15  | 66.85 | 0.00   |      |        |      |       |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |  |       |      |     |       |        |     |      |      |        |      |       |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |            |       |       |        |       |       |       |       |      |
| 2 11160.00 | 38.77   | 54.00       | -15.23       | 51.44       | 38.03  | 16.15  | 66.85 | 0.00   |      |        |      |       |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |  |       |      |     |       |        |     |      |      |        |      |       |             |              |             |        |  |  |  |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |            |       |       |        |       |       |       |       |      |

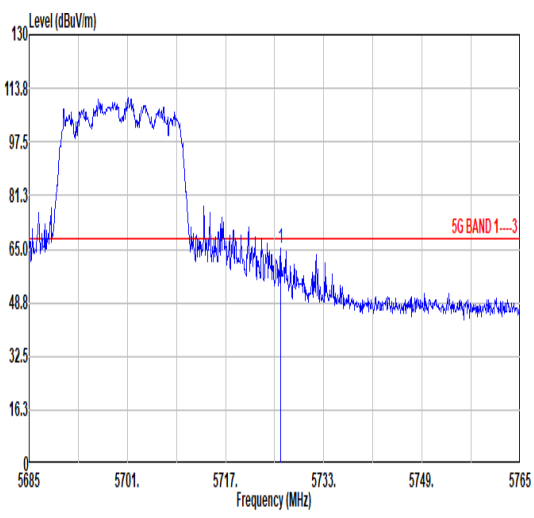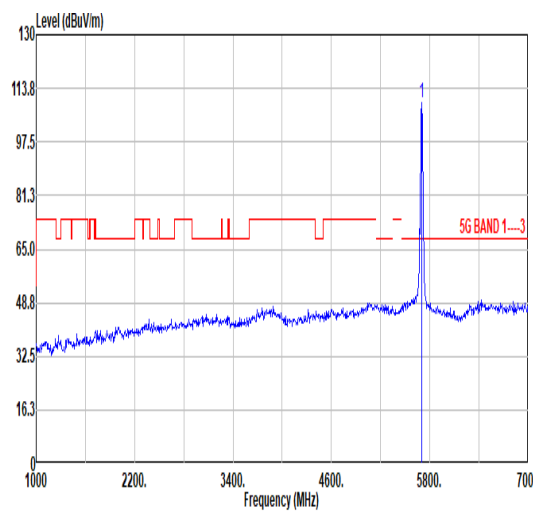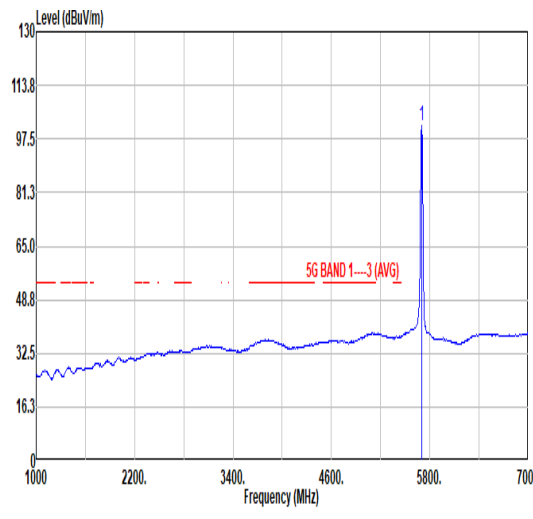

| Mode  | 18  |  |        |        |        |        |         |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |        |       |       |       |       |       |  |  |  |  |       |       |      |  |  |  |  |  |  |  |     |     |  |  |  |  |  |  |    |    |  |  |  |  |  |  |      |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |  |  |  |  |  |       |      |  |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |      |
|-------|---|--|--------|--------|--------|--------|---------|------|------|------|-------|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|------|------|------|----|----|---------|---------|--------|-------|-------|-------|-------|-------|--|--|--|--|-------|-------|------|--|--|--|--|--|--|--|-----|-----|--|--|--|--|--|--|----|----|--|--|--|--|--|--|------|---|-------|------|-----|-------|--------|-----|------|------|------|-------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|---|---------|--------|-------|-------|--------|-------|-------|--|--|--|--|--|-------|------|--|--|--|--|--|--|--|--|-----|--|--|--|--|--|--|--|----|--|--|--|--|--|--|--|------|
|       | Band Edge - L   |  |        |        |        |        |         |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |        |       |       |       |       |       |  |  |  |  |       |       |      |  |  |  |  |  |  |  |     |     |  |  |  |  |  |  |    |    |  |  |  |  |  |  |      |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |  |  |  |  |  |       |      |  |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |      |
|       | U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Full RU_5700MHz   |  |        |        |        |        |         |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |        |       |       |       |       |       |  |  |  |  |       |       |      |  |  |  |  |  |  |  |     |     |  |  |  |  |  |  |    |    |  |  |  |  |  |  |      |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |  |  |  |  |  |       |      |  |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |      |
| ANT   | CDD 4+5   |  |        |        |        |        |         |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |        |       |       |       |       |       |  |  |  |  |       |       |      |  |  |  |  |  |  |  |     |     |  |  |  |  |  |  |    |    |  |  |  |  |  |  |      |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |  |  |  |  |  |       |      |  |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |      |
| Pol.  | Horizontal  | Fundamental  |        |        |        |        |         |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |        |       |       |       |       |       |  |  |  |  |       |       |      |  |  |  |  |  |  |  |     |     |  |  |  |  |  |  |    |    |  |  |  |  |  |  |      |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |  |  |  |  |  |       |      |  |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |      |
| Peak  |  <table border="1" data-bbox="263 1131 782 1254"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5725.96</td> <td>65.00</td> <td>68.30</td> <td>-3.30</td> <td>56.77</td> <td>34.68</td> <td>11.18</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td>37.63</td> <td>0.00</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>100</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>84</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>PEAK</td> </tr> </tbody> </table> | Limit  | Read   | Ant    | Cable  | Preamp | Aux     | APos | TPos | Freq | Level | Line  | Margin | Level  | Factor | Loss   | Factor | MHz    | dBuV/m | dBuV/m | dB     | dBuV | dB/m | dB   | dB | 1  | 5725.96 | 65.00   | 68.30  | -3.30 | 56.77 | 34.68 | 11.18 |       |  |  |  |  | 37.63 | 0.00  |      |  |  |  |  |  |  |  | 100 |     |  |  |  |  |  |  | 84 |    |  |  |  |  |  |  | PEAK |  <table border="1" data-bbox="901 1131 1420 1254"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>109.64</td> <td>68.30</td> <td>41.34</td> <td>101.02</td> <td>34.61</td> <td>11.14</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td>37.13</td> <td>0.00</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>100</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>84</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 5700.00 | 109.64 | 68.30 | 41.34 | 101.02 | 34.61 | 11.14 |  |  |  |  |  | 37.13 | 0.00 |  |  |  |  |  |  |  |  | 100 |  |  |  |  |  |  |  | 84 |  |  |  |  |  |  |  | PEAK |
| Limit | Read  | Ant  | Cable  | Preamp | Aux    | APos   | TPos    |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |        |       |       |       |       |       |  |  |  |  |       |       |      |  |  |  |  |  |  |  |     |     |  |  |  |  |  |  |    |    |  |  |  |  |  |  |      |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |  |  |  |  |  |       |      |  |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |      |
| Freq  | Level   | Line   | Margin | Level  | Factor | Loss   | Factor  |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |        |       |       |       |       |       |  |  |  |  |       |       |      |  |  |  |  |  |  |  |     |     |  |  |  |  |  |  |    |    |  |  |  |  |  |  |      |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |  |  |  |  |  |       |      |  |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |      |
| MHz   | dBuV/m  | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB      |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |        |       |       |       |       |       |  |  |  |  |       |       |      |  |  |  |  |  |  |  |     |     |  |  |  |  |  |  |    |    |  |  |  |  |  |  |      |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |  |  |  |  |  |       |      |  |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |      |
| 1     | 5725.96   | 65.00  | 68.30  | -3.30  | 56.77  | 34.68  | 11.18   |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |        |       |       |       |       |       |  |  |  |  |       |       |      |  |  |  |  |  |  |  |     |     |  |  |  |  |  |  |    |    |  |  |  |  |  |  |      |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |  |  |  |  |  |       |      |  |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |      |
|       |   |  |        |        | 37.63  | 0.00   |         |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |        |       |       |       |       |       |  |  |  |  |       |       |      |  |  |  |  |  |  |  |     |     |  |  |  |  |  |  |    |    |  |  |  |  |  |  |      |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |  |  |  |  |  |       |      |  |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |      |
|       |   |  |        |        |        |        | 100     |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |        |       |       |       |       |       |  |  |  |  |       |       |      |  |  |  |  |  |  |  |     |     |  |  |  |  |  |  |    |    |  |  |  |  |  |  |      |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |  |  |  |  |  |       |      |  |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |      |
|       |   |  |        |        |        |        | 84      |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |        |       |       |       |       |       |  |  |  |  |       |       |      |  |  |  |  |  |  |  |     |     |  |  |  |  |  |  |    |    |  |  |  |  |  |  |      |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |  |  |  |  |  |       |      |  |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |      |
|       |   |  |        |        |        |        | PEAK    |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |        |       |       |       |       |       |  |  |  |  |       |       |      |  |  |  |  |  |  |  |     |     |  |  |  |  |  |  |    |    |  |  |  |  |  |  |      |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |  |  |  |  |  |       |      |  |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |      |
| Limit | Read  | Ant  | Cable  | Preamp | Aux    | APos   | TPos    |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |        |       |       |       |       |       |  |  |  |  |       |       |      |  |  |  |  |  |  |  |     |     |  |  |  |  |  |  |    |    |  |  |  |  |  |  |      |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |  |  |  |  |  |       |      |  |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |      |
| Freq  | Level   | Line   | Margin | Level  | Factor | Loss   | Factor  |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |        |       |       |       |       |       |  |  |  |  |       |       |      |  |  |  |  |  |  |  |     |     |  |  |  |  |  |  |    |    |  |  |  |  |  |  |      |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |  |  |  |  |  |       |      |  |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |      |
| MHz   | dBuV/m  | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB      |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |        |       |       |       |       |       |  |  |  |  |       |       |      |  |  |  |  |  |  |  |     |     |  |  |  |  |  |  |    |    |  |  |  |  |  |  |      |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |  |  |  |  |  |       |      |  |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |      |
| 1     | 5700.00   | 109.64   | 68.30  | 41.34  | 101.02 | 34.61  | 11.14   |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |        |       |       |       |       |       |  |  |  |  |       |       |      |  |  |  |  |  |  |  |     |     |  |  |  |  |  |  |    |    |  |  |  |  |  |  |      |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |  |  |  |  |  |       |      |  |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |      |
|       |   |  |        |        | 37.13  | 0.00   |         |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |        |       |       |       |       |       |  |  |  |  |       |       |      |  |  |  |  |  |  |  |     |     |  |  |  |  |  |  |    |    |  |  |  |  |  |  |      |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |  |  |  |  |  |       |      |  |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |      |
|       |   |  |        |        |        |        | 100     |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |        |       |       |       |       |       |  |  |  |  |       |       |      |  |  |  |  |  |  |  |     |     |  |  |  |  |  |  |    |    |  |  |  |  |  |  |      |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |  |  |  |  |  |       |      |  |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |      |
|       |   |  |        |        |        |        | 84      |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |        |       |       |       |       |       |  |  |  |  |       |       |      |  |  |  |  |  |  |  |     |     |  |  |  |  |  |  |    |    |  |  |  |  |  |  |      |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |  |  |  |  |  |       |      |  |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |      |
|       |   |  |        |        |        |        | PEAK    |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |        |       |       |       |       |       |  |  |  |  |       |       |      |  |  |  |  |  |  |  |     |     |  |  |  |  |  |  |    |    |  |  |  |  |  |  |      |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |  |  |  |  |  |       |      |  |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |      |
| Avg   | Blank   |  <table border="1" data-bbox="901 1814 1420 1937"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>101.55</td> <td>68.30</td> <td>33.25</td> <td>92.93</td> <td>34.61</td> <td>11.14</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td>37.13</td> <td>0.00</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>100</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>84</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit  | Read   | Ant    | Cable  | Preamp  | Aux  | APos | TPos | Freq  | Level | Line   | Margin | Level  | Factor | Loss   | Factor | MHz    | dBuV/m | dBuV/m | dB   | dBuV | dB/m | dB | dB | 1       | 5700.00 | 101.55 | 68.30 | 33.25 | 92.93 | 34.61 | 11.14 |  |  |  |  |       | 37.13 | 0.00 |  |  |  |  |  |  |  |     | 100 |  |  |  |  |  |  |    | 84 |  |  |  |  |  |  |      | AVERAGE   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |  |  |  |  |  |       |      |  |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |      |
| Limit | Read  | Ant  | Cable  | Preamp | Aux    | APos   | TPos    |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |        |       |       |       |       |       |  |  |  |  |       |       |      |  |  |  |  |  |  |  |     |     |  |  |  |  |  |  |    |    |  |  |  |  |  |  |      |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |  |  |  |  |  |       |      |  |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |      |
| Freq  | Level   | Line   | Margin | Level  | Factor | Loss   | Factor  |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |        |       |       |       |       |       |  |  |  |  |       |       |      |  |  |  |  |  |  |  |     |     |  |  |  |  |  |  |    |    |  |  |  |  |  |  |      |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |  |  |  |  |  |       |      |  |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |      |
| MHz   | dBuV/m  | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB      |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |        |       |       |       |       |       |  |  |  |  |       |       |      |  |  |  |  |  |  |  |     |     |  |  |  |  |  |  |    |    |  |  |  |  |  |  |      |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |  |  |  |  |  |       |      |  |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |      |
| 1     | 5700.00   | 101.55   | 68.30  | 33.25  | 92.93  | 34.61  | 11.14   |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |        |       |       |       |       |       |  |  |  |  |       |       |      |  |  |  |  |  |  |  |     |     |  |  |  |  |  |  |    |    |  |  |  |  |  |  |      |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |  |  |  |  |  |       |      |  |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |      |
|       |   |  |        |        | 37.13  | 0.00   |         |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |        |       |       |       |       |       |  |  |  |  |       |       |      |  |  |  |  |  |  |  |     |     |  |  |  |  |  |  |    |    |  |  |  |  |  |  |      |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |  |  |  |  |  |       |      |  |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |      |
|       |   |  |        |        |        |        | 100     |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |        |       |       |       |       |       |  |  |  |  |       |       |      |  |  |  |  |  |  |  |     |     |  |  |  |  |  |  |    |    |  |  |  |  |  |  |      |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |  |  |  |  |  |       |      |  |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |      |
|       |   |  |        |        |        |        | 84      |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |        |       |       |       |       |       |  |  |  |  |       |       |      |  |  |  |  |  |  |  |     |     |  |  |  |  |  |  |    |    |  |  |  |  |  |  |      |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |  |  |  |  |  |       |      |  |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |      |
|       |   |  |        |        |        |        | AVERAGE |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |        |       |       |       |       |       |  |  |  |  |       |       |      |  |  |  |  |  |  |  |     |     |  |  |  |  |  |  |    |    |  |  |  |  |  |  |      |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |  |  |  |  |  |       |      |  |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |      |



| Mode  | 18   |   |        |        |        |        |        |        |        |        |        |         |       |        |        |        |        |        |        |        |        |        |        |      |      |      |    |    |    |     |     |         |         |       |       |       |       |       |       |       |      |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |      |
|-------|--|---|--------|--------|--------|--------|--------|--------|--------|--------|--------|---------|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|------|------|------|----|----|----|-----|-----|---------|---------|-------|-------|-------|-------|-------|-------|-------|------|-----|------|---|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|
|       | Band Edge - L  |   |        |        |        |        |        |        |        |        |        |         |       |        |        |        |        |        |        |        |        |        |        |      |      |      |    |    |    |     |     |         |         |       |       |       |       |       |       |       |      |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |      |
|       | U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Full RU_5700MHz  |   |        |        |        |        |        |        |        |        |        |         |       |        |        |        |        |        |        |        |        |        |        |      |      |      |    |    |    |     |     |         |         |       |       |       |       |       |       |       |      |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |      |
| ANT   | CDD 4+5  |   |        |        |        |        |        |        |        |        |        |         |       |        |        |        |        |        |        |        |        |        |        |      |      |      |    |    |    |     |     |         |         |       |       |       |       |       |       |       |      |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |      |
| Pol.  | Vertical   | Fundamental   |        |        |        |        |        |        |        |        |        |         |       |        |        |        |        |        |        |        |        |        |        |      |      |      |    |    |    |     |     |         |         |       |       |       |       |       |       |       |      |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |      |
| Peak  | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5727.32</td> <td>62.07</td> <td>68.30</td> <td>-6.23</td> <td>53.86</td> <td>34.69</td> <td>11.18</td> <td>37.66</td> <td>0.00</td> <td>341</td> <td>235</td> <td>PEAK</td> </tr> </tbody> </table> | Limit   | Read   | Ant    | Cable  | Preamp | Aux    | APos   | TPos   | Remark | Freq   | Level   | Line  | Margin | Level  | Factor | Loss   | Factor | Factor | MHz    | dBuV/m | dBuV/m | dB     | dBuV | dB/m | dB   | dB | dB | cm | deg | 1   | 5727.32 | 62.07   | 68.30 | -6.23 | 53.86 | 34.69 | 11.18 | 37.66 | 0.00  | 341  | 235 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>107.43</td> <td>68.30</td> <td>39.13</td> <td>98.81</td> <td>34.61</td> <td>11.14</td> <td>37.13</td> <td>0.00</td> <td>341</td> <td>235</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | 1 | 5700.00 | 107.43 | 68.30 | 39.13 | 98.81 | 34.61 | 11.14 | 37.13 | 0.00 | 341 | 235 | PEAK |
|       | Limit  | Read  | Ant    | Cable  | Preamp | Aux    | APos   | TPos   | Remark |        |        |         |       |        |        |        |        |        |        |        |        |        |        |      |      |      |    |    |    |     |     |         |         |       |       |       |       |       |       |       |      |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |      |
| Freq  | Level  | Line  | Margin | Level  | Factor | Loss   | Factor | Factor |        |        |        |         |       |        |        |        |        |        |        |        |        |        |        |      |      |      |    |    |    |     |     |         |         |       |       |       |       |       |       |       |      |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |      |
| MHz   | dBuV/m   | dBuV/m  | dB     | dBuV   | dB/m   | dB     | dB     | dB     | cm     | deg    |        |         |       |        |        |        |        |        |        |        |        |        |        |      |      |      |    |    |    |     |     |         |         |       |       |       |       |       |       |       |      |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |      |
| 1     | 5727.32  | 62.07   | 68.30  | -6.23  | 53.86  | 34.69  | 11.18  | 37.66  | 0.00   | 341    | 235    | PEAK    |       |        |        |        |        |        |        |        |        |        |        |      |      |      |    |    |    |     |     |         |         |       |       |       |       |       |       |       |      |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |      |
| Limit | Read   | Ant   | Cable  | Preamp | Aux    | APos   | TPos   | Remark |        |        |        |         |       |        |        |        |        |        |        |        |        |        |        |      |      |      |    |    |    |     |     |         |         |       |       |       |       |       |       |       |      |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |      |
| Freq  | Level  | Line  | Margin | Level  | Factor | Loss   | Factor | Factor |        |        |        |         |       |        |        |        |        |        |        |        |        |        |        |      |      |      |    |    |    |     |     |         |         |       |       |       |       |       |       |       |      |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |      |
| MHz   | dBuV/m   | dBuV/m  | dB     | dBuV   | dB/m   | dB     | dB     | dB     | cm     | deg    |        |         |       |        |        |        |        |        |        |        |        |        |        |      |      |      |    |    |    |     |     |         |         |       |       |       |       |       |       |       |      |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |      |
| 1     | 5700.00  | 107.43  | 68.30  | 39.13  | 98.81  | 34.61  | 11.14  | 37.13  | 0.00   | 341    | 235    | PEAK    |       |        |        |        |        |        |        |        |        |        |        |      |      |      |    |    |    |     |     |         |         |       |       |       |       |       |       |       |      |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |      |
| Avg   | Blank  | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>98.97</td> <td>68.30</td> <td>30.67</td> <td>90.35</td> <td>34.61</td> <td>11.14</td> <td>37.13</td> <td>0.00</td> <td>341</td> <td>235</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit  | Read   | Ant    | Cable  | Preamp | Aux    | APos   | TPos   | Remark | Freq    | Level | Line   | Margin | Level  | Factor | Loss   | Factor | Factor | MHz    | dBuV/m | dBuV/m | dB   | dBuV | dB/m | dB | dB | dB | cm  | deg | 1       | 5700.00 | 98.97 | 68.30 | 30.67 | 90.35 | 34.61 | 11.14 | 37.13 | 0.00 | 341 | 235  | AVERAGE   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |      |
| Limit | Read   | Ant   | Cable  | Preamp | Aux    | APos   | TPos   | Remark |        |        |        |         |       |        |        |        |        |        |        |        |        |        |        |      |      |      |    |    |    |     |     |         |         |       |       |       |       |       |       |       |      |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |      |
| Freq  | Level  | Line  | Margin | Level  | Factor | Loss   | Factor | Factor |        |        |        |         |       |        |        |        |        |        |        |        |        |        |        |      |      |      |    |    |    |     |     |         |         |       |       |       |       |       |       |       |      |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |      |
| MHz   | dBuV/m   | dBuV/m  | dB     | dBuV   | dB/m   | dB     | dB     | dB     | cm     | deg    |        |         |       |        |        |        |        |        |        |        |        |        |        |      |      |      |    |    |    |     |     |         |         |       |       |       |       |       |       |       |      |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |      |
| 1     | 5700.00  | 98.97   | 68.30  | 30.67  | 90.35  | 34.61  | 11.14  | 37.13  | 0.00   | 341    | 235    | AVERAGE |       |        |        |        |        |        |        |        |        |        |        |      |      |      |    |    |    |     |     |         |         |       |       |       |       |       |       |       |      |     |      |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |      |







| Mode        | 18   |          |        |        |        |        |        |        |          |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |          |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |          |            |       |       |        |       |       |       |       |      |
|-------------|--|----------|--------|--------|--------|--------|--------|--------|----------|--------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|------------|-------|-------|--------|-------|-------|-------|-------|------|----------|---|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|------------|-------|-------|--------|-------|-------|-------|-------|------|----------|------------|-------|-------|--------|-------|-------|-------|-------|------|
|             | Harmonic   |          |        |        |        |        |        |        |          |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |          |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |          |            |       |       |        |       |       |       |       |      |
|             | U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Full RU_5700MHz  |          |        |        |        |        |        |        |          |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |          |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |          |            |       |       |        |       |       |       |       |      |
| ANT         | CDD 4+5  |          |        |        |        |        |        |        |          |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |          |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |          |            |       |       |        |       |       |       |       |      |
| Pol.        | Horizontal   | Vertical |        |        |        |        |        |        |          |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |          |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |          |            |       |       |        |       |       |       |       |      |
| Peak<br>Avg |  |          |        |        |        |        |        |        |          |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |          |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |          |            |       |       |        |       |       |       |       |      |
|             | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11400.00</td> <td>43.74</td> <td>74.00</td> <td>-30.26</td> <td>55.99</td> <td>38.22</td> <td>16.30</td> <td>66.77</td> <td>0.00</td> <td>--- PEAK</td> </tr> </tbody> </table> | Limit    | Read   | Ant    | Cable  | Preamp | Aux    | APos   | TPos     | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 11400.00 | 43.74 | 74.00 | -30.26 | 55.99 | 38.22 | 16.30 | 66.77 | 0.00 | --- PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11397.00</td> <td>50.01</td> <td>74.00</td> <td>-23.99</td> <td>62.26</td> <td>38.22</td> <td>16.30</td> <td>66.77</td> <td>0.00</td> <td>--- Peak</td> </tr> <tr> <td>2 17098.00</td> <td>53.59</td> <td>68.30</td> <td>-14.71</td> <td>56.76</td> <td>41.30</td> <td>20.07</td> <td>64.54</td> <td>0.00</td> <td>--- Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | 1 11397.00 | 50.01 | 74.00 | -23.99 | 62.26 | 38.22 | 16.30 | 66.77 | 0.00 | --- Peak | 2 17098.00 | 53.59 | 68.30 | -14.71 | 56.76 | 41.30 | 20.07 | 64.54 | 0.00 |
| Limit       | Read   | Ant      | Cable  | Preamp | Aux    | APos   | TPos   | Remark |          |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |          |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |          |            |       |       |        |       |       |       |       |      |
| Freq        | Level  | Line     | Margin | Level  | Factor | Loss   | Factor | Factor |          |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |          |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |          |            |       |       |        |       |       |       |       |      |
| MHz         | dBuV/m   | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB     | dB     |          |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |          |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |          |            |       |       |        |       |       |       |       |      |
| 1 11400.00  | 43.74  | 74.00    | -30.26 | 55.99  | 38.22  | 16.30  | 66.77  | 0.00   | --- PEAK |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |          |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |          |            |       |       |        |       |       |       |       |      |
| Limit       | Read   | Ant      | Cable  | Preamp | Aux    | APos   | TPos   | Remark |          |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |          |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |          |            |       |       |        |       |       |       |       |      |
| Freq        | Level  | Line     | Margin | Level  | Factor | Loss   | Factor | Factor |          |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |          |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |          |            |       |       |        |       |       |       |       |      |
| MHz         | dBuV/m   | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB     | dB     |          |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |          |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |          |            |       |       |        |       |       |       |       |      |
| 1 11397.00  | 50.01  | 74.00    | -23.99 | 62.26  | 38.22  | 16.30  | 66.77  | 0.00   | --- Peak |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |          |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |          |            |       |       |        |       |       |       |       |      |
| 2 17098.00  | 53.59  | 68.30    | -14.71 | 56.76  | 41.30  | 20.07  | 64.54  | 0.00   | --- Peak |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |          |   |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |     |        |        |    |      |      |    |    |    |            |       |       |        |       |       |       |       |      |          |            |       |       |        |       |       |       |       |      |







| Mode      | 19  |             |              |             |        |        |            |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |       |       |        |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |   |       |      |     |       |        |     |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |
|-----------|---|-------------|--------------|-------------|--------|--------|------------|------|------|------|-------|-------------|--------------|-------------|--------|--------|--------|-----|--------|--------|----|------|------|----|----|-----------|-------|-------|--------|-------|-------|-------|-------|--|--|--|--|--|--|------|-----|--|--|--|--|--|--|--|------------|---|-------|------|-----|-------|--------|-----|------|------|------|-------|-------------|--------------|-------------|--------|--------|--------|-----|--------|--------|----|------|------|----|----|-----------|--------|-------|-------|-------|-------|-------|-------|--|--|--|--|--|--|------|-----|--|--|--|--|--|--|--|------------|
|           | Band Edge   |             |              |             |        |        |            |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |       |       |        |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |   |       |      |     |       |        |     |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |
|           | U-NII-2C_5.15-5.25_802.11ax HE20_CH36_RU26/0_5180MHz  |             |              |             |        |        |            |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |       |       |        |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |   |       |      |     |       |        |     |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |
| ANT       | CDD 4+5   |             |              |             |        |        |            |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |       |       |        |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |   |       |      |     |       |        |     |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |
| Pol.      | Horizontal  | Fundamental |              |             |        |        |            |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |       |       |        |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |   |       |      |     |       |        |     |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |
| Peak      | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5149.40</td> <td>50.13</td> <td>74.00</td> <td>-23.87</td> <td>42.34</td> <td>34.23</td> <td>10.61</td> <td>37.05</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>117</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>85 PEAK</td> </tr> </tbody> </table>    | Limit       | Read         | Ant         | Cable  | Preamp | Aux        | APos | TPos | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 5149.40 | 50.13 | 74.00 | -23.87 | 42.34 | 34.23 | 10.61 | 37.05 |  |  |  |  |  |  | 0.00 | 117 |  |  |  |  |  |  |  | 85 PEAK    | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5180.00</td> <td>107.46</td> <td>-----</td> <td>-----</td> <td>99.55</td> <td>34.27</td> <td>10.64</td> <td>37.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>117</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>85 PEAK</td> </tr> </tbody> </table>    | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 5180.00 | 107.46 | ----- | ----- | 99.55 | 34.27 | 10.64 | 37.00 |  |  |  |  |  |  | 0.00 | 117 |  |  |  |  |  |  |  | 85 PEAK    |
| Limit     | Read  | Ant         | Cable        | Preamp      | Aux    | APos   | TPos       |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |       |       |        |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |   |       |      |     |       |        |     |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |
| Freq      | Level   | Line Margin | Level Factor | Loss Factor | Factor | Factor | Remark     |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |       |       |        |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |   |       |      |     |       |        |     |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |
| MHz       | dBuV/m  | dBuV/m      | dB           | dBuV        | dB/m   | dB     | dB         |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |       |       |        |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |   |       |      |     |       |        |     |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |
| 1 5149.40 | 50.13   | 74.00       | -23.87       | 42.34       | 34.23  | 10.61  | 37.05      |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |       |       |        |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |   |       |      |     |       |        |     |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |
|           |   |             |              |             |        | 0.00   | 117        |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |       |       |        |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |   |       |      |     |       |        |     |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |
|           |   |             |              |             |        |        | 85 PEAK    |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |       |       |        |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |   |       |      |     |       |        |     |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |
| Limit     | Read  | Ant         | Cable        | Preamp      | Aux    | APos   | TPos       |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |       |       |        |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |   |       |      |     |       |        |     |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |
| Freq      | Level   | Line Margin | Level Factor | Loss Factor | Factor | Factor | Remark     |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |       |       |        |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |   |       |      |     |       |        |     |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |
| MHz       | dBuV/m  | dBuV/m      | dB           | dBuV        | dB/m   | dB     | dB         |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |       |       |        |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |   |       |      |     |       |        |     |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |
| 1 5180.00 | 107.46  | -----       | -----        | 99.55       | 34.27  | 10.64  | 37.00      |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |       |       |        |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |   |       |      |     |       |        |     |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |
|           |   |             |              |             |        | 0.00   | 117        |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |       |       |        |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |   |       |      |     |       |        |     |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |
|           |   |             |              |             |        |        | 85 PEAK    |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |       |       |        |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |   |       |      |     |       |        |     |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |
| Avg       | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5149.70</td> <td>38.90</td> <td>54.00</td> <td>-15.10</td> <td>31.11</td> <td>34.23</td> <td>10.61</td> <td>37.05</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>117</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>85 AVERAGE</td> </tr> </tbody> </table> | Limit       | Read         | Ant         | Cable  | Preamp | Aux        | APos | TPos | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 5149.70 | 38.90 | 54.00 | -15.10 | 31.11 | 34.23 | 10.61 | 37.05 |  |  |  |  |  |  | 0.00 | 117 |  |  |  |  |  |  |  | 85 AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5180.00</td> <td>100.31</td> <td>-----</td> <td>-----</td> <td>92.40</td> <td>34.27</td> <td>10.64</td> <td>37.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>117</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>85 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 5180.00 | 100.31 | ----- | ----- | 92.40 | 34.27 | 10.64 | 37.00 |  |  |  |  |  |  | 0.00 | 117 |  |  |  |  |  |  |  | 85 AVERAGE |
| Limit     | Read  | Ant         | Cable        | Preamp      | Aux    | APos   | TPos       |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |       |       |        |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |   |       |      |     |       |        |     |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |
| Freq      | Level   | Line Margin | Level Factor | Loss Factor | Factor | Factor | Remark     |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |       |       |        |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |   |       |      |     |       |        |     |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |
| MHz       | dBuV/m  | dBuV/m      | dB           | dBuV        | dB/m   | dB     | dB         |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |       |       |        |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |   |       |      |     |       |        |     |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |
| 1 5149.70 | 38.90   | 54.00       | -15.10       | 31.11       | 34.23  | 10.61  | 37.05      |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |       |       |        |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |   |       |      |     |       |        |     |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |
|           |   |             |              |             |        | 0.00   | 117        |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |       |       |        |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |   |       |      |     |       |        |     |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |
|           |   |             |              |             |        |        | 85 AVERAGE |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |       |       |        |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |   |       |      |     |       |        |     |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |
| Limit     | Read  | Ant         | Cable        | Preamp      | Aux    | APos   | TPos       |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |       |       |        |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |   |       |      |     |       |        |     |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |
| Freq      | Level   | Line Margin | Level Factor | Loss Factor | Factor | Factor | Remark     |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |       |       |        |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |   |       |      |     |       |        |     |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |
| MHz       | dBuV/m  | dBuV/m      | dB           | dBuV        | dB/m   | dB     | dB         |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |       |       |        |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |   |       |      |     |       |        |     |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |
| 1 5180.00 | 100.31  | -----       | -----        | 92.40       | 34.27  | 10.64  | 37.00      |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |       |       |        |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |   |       |      |     |       |        |     |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |
|           |   |             |              |             |        | 0.00   | 117        |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |       |       |        |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |   |       |      |     |       |        |     |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |
|           |   |             |              |             |        |        | 85 AVERAGE |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |       |       |        |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |   |       |      |     |       |        |     |      |      |      |       |             |              |             |        |        |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |            |



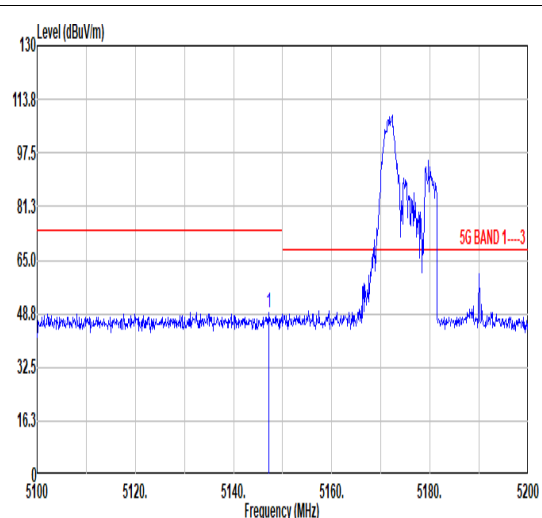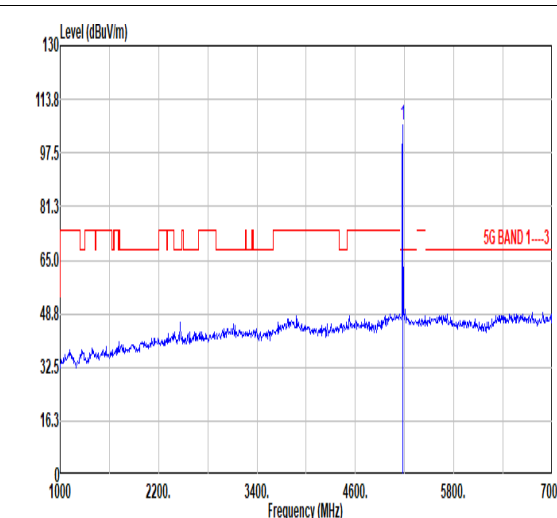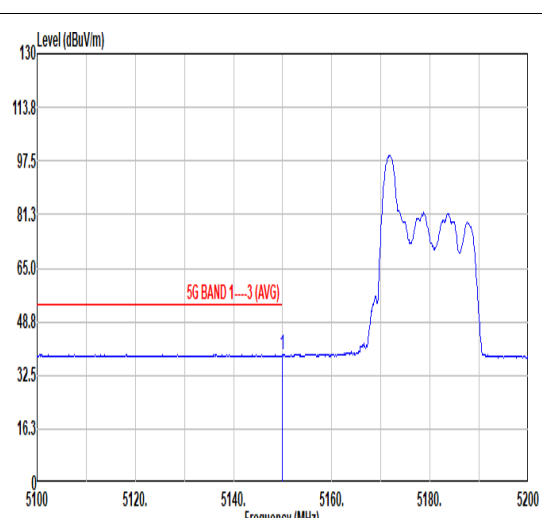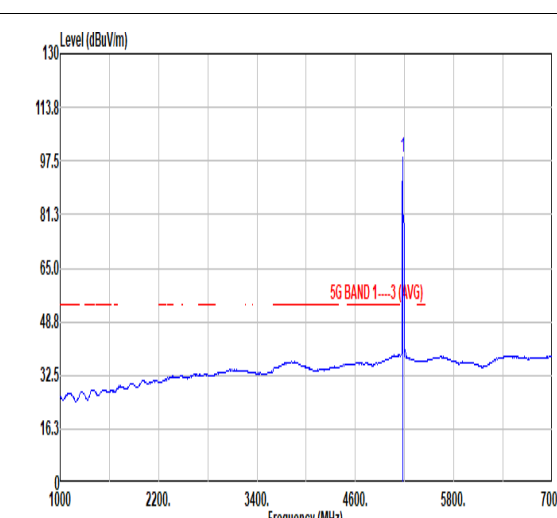

| Mode  | 19  |             |       |        |             |        |        |       |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
|-------|---|-------------|-------|--------|-------------|--------|--------|-------|------|------|-------|-------------|-------|--------|-------------|--------|--------|-----|--------|--------|----|------|------|----|----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|---|-------|------|-----|-------|--------|-----|------|------|------|-------|-------------|-------|--------|-------------|--------|--------|-----|--------|--------|----|------|------|----|----|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|
|       | Band Edge   |             |       |        |             |        |        |       |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
|       | U-NII-2C_5.15-5.25_802.11ax HE20_CH36_RU26/0_5180MHz  |             |       |        |             |        |        |       |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| ANT   | CDD 4+5   |             |       |        |             |        |        |       |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Pol.  | Vertical  | Fundamental |       |        |             |        |        |       |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Peak  |  <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>5G BAND 1---3</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5147.20</td> <td>49.30</td> <td>74.00</td> <td>-24.70</td> <td>41.52</td> <td>34.22</td> <td>10.61</td> <td>37.05</td> <td>0.00</td> <td>400</td> <td>242</td> <td>PEAK</td> </tr> </tbody> </table>           | Limit       | Read  | Ant    | Cable       | Preamp | Aux    | APos  | TPos | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 5147.20 | 49.30 | 74.00 | -24.70 | 41.52 | 34.22 | 10.61 | 37.05 | 0.00 | 400 | 242 | PEAK    |  <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>5G BAND 1---3</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>105.73</td> <td>-----</td> <td>-----</td> <td>97.82</td> <td>34.27</td> <td>10.64</td> <td>37.00</td> <td>0.00</td> <td>400</td> <td>242</td> <td>PEAK</td> </tr> </tbody> </table>          | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 5180.00 | 105.73 | ----- | ----- | 97.82 | 34.27 | 10.64 | 37.00 | 0.00 | 400 | 242 | PEAK    |
| Limit | Read  | Ant         | Cable | Preamp | Aux         | APos   | TPos   |       |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Freq  | Level   | Line Margin | Level | Factor | Loss Factor | Factor | Remark |       |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| MHz   | dBuV/m  | dBuV/m      | dB    | dBuV   | dB/m        | dB     | dB     |       |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| 1     | 5147.20   | 49.30       | 74.00 | -24.70 | 41.52       | 34.22  | 10.61  | 37.05 | 0.00 | 400  | 242   | PEAK        |       |        |             |        |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Limit | Read  | Ant         | Cable | Preamp | Aux         | APos   | TPos   |       |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Freq  | Level   | Line Margin | Level | Factor | Loss Factor | Factor | Remark |       |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| MHz   | dBuV/m  | dBuV/m      | dB    | dBuV   | dB/m        | dB     | dB     |       |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| 1     | 5180.00   | 105.73      | ----- | -----  | 97.82       | 34.27  | 10.64  | 37.00 | 0.00 | 400  | 242   | PEAK        |       |        |             |        |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Avg   |  <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>5G BAND 1---3 (AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>38.75</td> <td>54.00</td> <td>-15.25</td> <td>30.96</td> <td>34.23</td> <td>10.61</td> <td>37.05</td> <td>0.00</td> <td>400</td> <td>242</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit       | Read  | Ant    | Cable       | Preamp | Aux    | APos  | TPos | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 5150.00 | 38.75 | 54.00 | -15.25 | 30.96 | 34.23 | 10.61 | 37.05 | 0.00 | 400 | 242 | AVERAGE |  <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>5G BAND 1---3 (AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>98.55</td> <td>-----</td> <td>-----</td> <td>90.64</td> <td>34.27</td> <td>10.64</td> <td>37.00</td> <td>0.00</td> <td>400</td> <td>242</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 5180.00 | 98.55  | ----- | ----- | 90.64 | 34.27 | 10.64 | 37.00 | 0.00 | 400 | 242 | AVERAGE |
| Limit | Read  | Ant         | Cable | Preamp | Aux         | APos   | TPos   |       |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Freq  | Level   | Line Margin | Level | Factor | Loss Factor | Factor | Remark |       |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| MHz   | dBuV/m  | dBuV/m      | dB    | dBuV   | dB/m        | dB     | dB     |       |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| 1     | 5150.00   | 38.75       | 54.00 | -15.25 | 30.96       | 34.23  | 10.61  | 37.05 | 0.00 | 400  | 242   | AVERAGE     |       |        |             |        |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Limit | Read  | Ant         | Cable | Preamp | Aux         | APos   | TPos   |       |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Freq  | Level   | Line Margin | Level | Factor | Loss Factor | Factor | Remark |       |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| MHz   | dBuV/m  | dBuV/m      | dB    | dBuV   | dB/m        | dB     | dB     |       |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| 1     | 5180.00   | 98.55       | ----- | -----  | 90.64       | 34.27  | 10.64  | 37.00 | 0.00 | 400  | 242   | AVERAGE     |       |        |             |        |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |

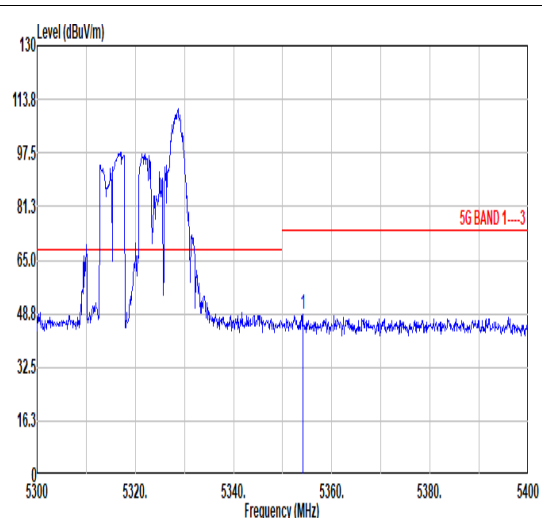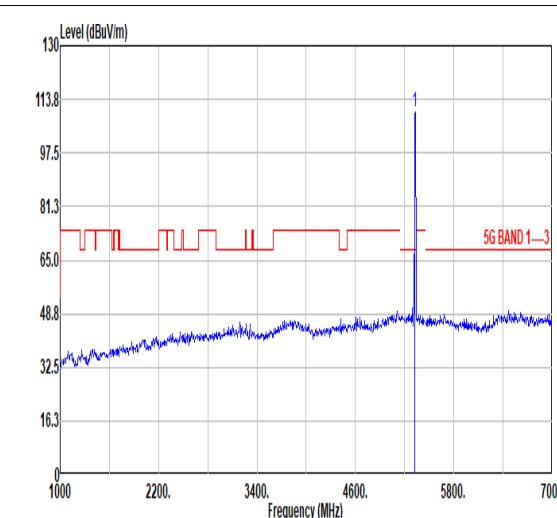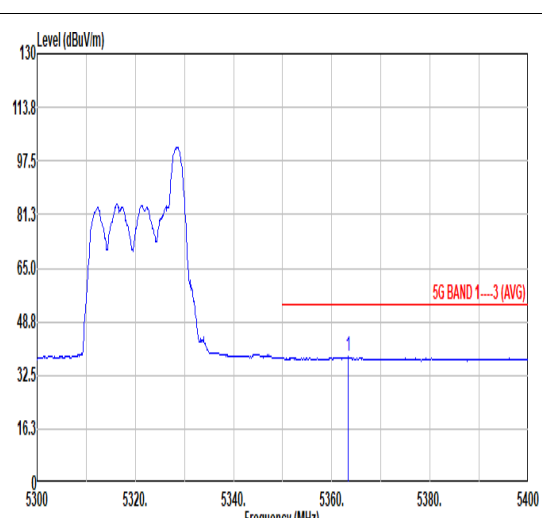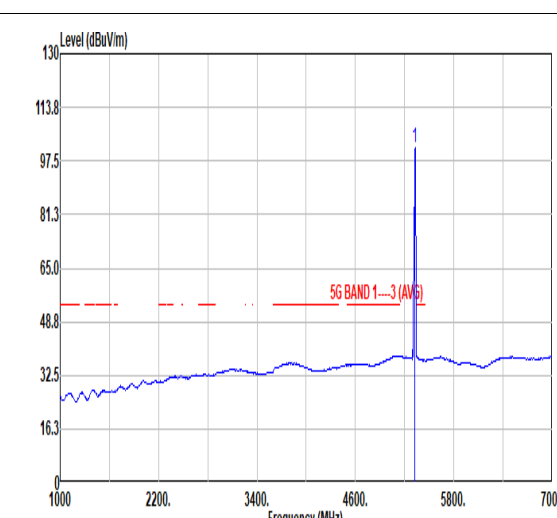

|       |   | 20   |       |        |             |        |        |       |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |        |       |       |       |      |     |    |         |
|-------|---|--|-------|--------|-------------|--------|--------|-------|------|------|-------|-------------|-------|--------|-------------|--------|--------|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|----|---------|--|-------|------|-----|-------|--------|-----|------|------|------|-------|-------------|-------|--------|-------------|--------|--------|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|--------|-------|-------|-------|------|-----|----|---------|
| Mode  |   | Band Edge  |       |        |             |        |        |       |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |        |       |       |       |      |     |    |         |
|       |   | U-NII-2C_5.25-5.35_802.11ax HE20_CH64_RU26/8_5320MHz |       |        |             |        |        |       |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |        |       |       |       |      |     |    |         |
| ANT   |   | CDD 4+5  |       |        |             |        |        |       |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Pol.  | Horizontal  | Fundamental  |       |        |             |        |        |       |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Peak  |  <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>5G BAND 1---3</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5354.10</td> <td>48.61</td> <td>74.00</td> <td>-25.39</td> <td>39.99</td> <td>34.53</td> <td>10.75</td> <td>36.66</td> <td>0.00</td> <td>100</td> <td>64</td> <td>PEAK</td> </tr> </tbody> </table>           | Limit  | Read  | Ant    | Cable       | Preamp | Aux    | APos  | TPos | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5354.10 | 48.61 | 74.00 | -25.39 | 39.99 | 34.53 | 10.75 | 36.66 | 0.00 | 100 | 64 | PEAK    |  <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>5G BAND 1---3</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>109.77</td> <td>-----</td> <td>-----</td> <td>101.23</td> <td>34.50</td> <td>10.74</td> <td>36.70</td> <td>0.00</td> <td>100</td> <td>64</td> <td>PEAK</td> </tr> </tbody> </table>          | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5320.00 | 109.77 | ----- | ----- | 101.23 | 34.50 | 10.74 | 36.70 | 0.00 | 100 | 64 | PEAK    |
|       | Limit   | Read   | Ant   | Cable  | Preamp      | Aux    | APos   | TPos  |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Freq  | Level   | Line Margin  | Level | Factor | Loss Factor | Factor | Remark |       |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |        |       |       |       |      |     |    |         |
| MHz   | dBuV/m  | dBuV/m   | dB    | dBuV   | dB/m        | dB     | dB     | cm    | deg  |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |        |       |       |       |      |     |    |         |
| 1     | 5354.10   | 48.61  | 74.00 | -25.39 | 39.99       | 34.53  | 10.75  | 36.66 | 0.00 | 100  | 64    | PEAK        |       |        |             |        |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Limit | Read  | Ant  | Cable | Preamp | Aux         | APos   | TPos   |       |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Freq  | Level   | Line Margin  | Level | Factor | Loss Factor | Factor | Remark |       |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |        |       |       |       |      |     |    |         |
| MHz   | dBuV/m  | dBuV/m   | dB    | dBuV   | dB/m        | dB     | dB     | cm    | deg  |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |        |       |       |       |      |     |    |         |
| 1     | 5320.00   | 109.77   | ----- | -----  | 101.23      | 34.50  | 10.74  | 36.70 | 0.00 | 100  | 64    | PEAK        |       |        |             |        |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Avg   |  <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>5G BAND 1---3 (AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5363.40</td> <td>38.03</td> <td>54.00</td> <td>-15.97</td> <td>29.39</td> <td>34.54</td> <td>10.75</td> <td>36.65</td> <td>0.00</td> <td>100</td> <td>64</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit  | Read  | Ant    | Cable       | Preamp | Aux    | APos  | TPos | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5363.40 | 38.03 | 54.00 | -15.97 | 29.39 | 34.54 | 10.75 | 36.65 | 0.00 | 100 | 64 | AVERAGE |  <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>5G BAND 1---3 (AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>101.42</td> <td>-----</td> <td>-----</td> <td>92.88</td> <td>34.50</td> <td>10.74</td> <td>36.70</td> <td>0.00</td> <td>100</td> <td>64</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line Margin | Level | Factor | Loss Factor | Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5320.00 | 101.42 | ----- | ----- | 92.88  | 34.50 | 10.74 | 36.70 | 0.00 | 100 | 64 | AVERAGE |
|       | Limit   | Read   | Ant   | Cable  | Preamp      | Aux    | APos   | TPos  |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Freq  | Level   | Line Margin  | Level | Factor | Loss Factor | Factor | Remark |       |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |        |       |       |       |      |     |    |         |
| MHz   | dBuV/m  | dBuV/m   | dB    | dBuV   | dB/m        | dB     | dB     | cm    | deg  |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |        |       |       |       |      |     |    |         |
| 1     | 5363.40   | 38.03  | 54.00 | -15.97 | 29.39       | 34.54  | 10.75  | 36.65 | 0.00 | 100  | 64    | AVERAGE     |       |        |             |        |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Limit | Read  | Ant  | Cable | Preamp | Aux         | APos   | TPos   |       |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Freq  | Level   | Line Margin  | Level | Factor | Loss Factor | Factor | Remark |       |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |        |       |       |       |      |     |    |         |
| MHz   | dBuV/m  | dBuV/m   | dB    | dBuV   | dB/m        | dB     | dB     | cm    | deg  |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |        |       |       |       |      |     |    |         |
| 1     | 5320.00   | 101.42   | ----- | -----  | 92.88       | 34.50  | 10.74  | 36.70 | 0.00 | 100  | 64    | AVERAGE     |       |        |             |        |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |             |       |        |             |        |        |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |        |       |       |       |      |     |    |         |



|       |   | 20   |        |        |        |        |        |        |        |        |      |         |      |        |       |        |      |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
|-------|---|--|--------|--------|--------|--------|--------|--------|--------|--------|------|---------|------|--------|-------|--------|------|--------|--------|----|-----|-----|--------|--------|----|------|------|----|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|--|-------|------|-----|-------|--------|-----|------|------|--------|------|-------|------|--------|-------|--------|------|--------|--------|----|-----|-----|--------|--------|----|------|------|----|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|
| Mode  |   | Band Edge  |        |        |        |        |        |        |        |        |      |         |      |        |       |        |      |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
|       |   | U-NII-2C_5.25-5.35_802.11ax HE20_CH64_RU26/8_5320MHz |        |        |        |        |        |        |        |        |      |         |      |        |       |        |      |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| ANT   |   | CDD 4+5  |        |        |        |        |        |        |        |        |      |         |      |        |       |        |      |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Pol.  | Vertical  | Fundamental  |        |        |        |        |        |        |        |        |      |         |      |        |       |        |      |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Peak  | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5387.60</td> <td>47.76</td> <td>74.00</td> <td>-26.24</td> <td>39.01</td> <td>34.58</td> <td>10.77</td> <td>36.60</td> <td>0.00</td> <td>266</td> <td>116</td> <td>PEAK</td> </tr> </tbody> </table>    | Limit  | Read   | Ant    | Cable  | Preamp | Aux    | APos   | TPos   | Remark | Freq | Level   | Line | Margin | Level | Factor | Loss | Factor | Factor | cm | deg | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | 1 | 5387.60 | 47.76 | 74.00 | -26.24 | 39.01 | 34.58 | 10.77 | 36.60 | 0.00 | 266 | 116 | PEAK    | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>100.95</td> <td>-----</td> <td>-----</td> <td>92.41</td> <td>34.50</td> <td>10.74</td> <td>36.70</td> <td>0.00</td> <td>266</td> <td>116</td> <td>PEAK</td> </tr> </tbody> </table>   | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | cm | deg | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | 1 | 5320.00 | 100.95 | ----- | ----- | 92.41 | 34.50 | 10.74 | 36.70 | 0.00 | 266 | 116 | PEAK    |
|       | Limit   | Read   | Ant    | Cable  | Preamp | Aux    | APos   | TPos   | Remark |        |      |         |      |        |       |        |      |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Freq  | Level   | Line   | Margin | Level  | Factor | Loss   | Factor | Factor | cm     | deg    |      |         |      |        |       |        |      |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| MHz   | dBuV/m  | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB     | dB     | cm     | deg    |      |         |      |        |       |        |      |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| 1     | 5387.60   | 47.76  | 74.00  | -26.24 | 39.01  | 34.58  | 10.77  | 36.60  | 0.00   | 266    | 116  | PEAK    |      |        |       |        |      |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Limit | Read  | Ant  | Cable  | Preamp | Aux    | APos   | TPos   | Remark |        |        |      |         |      |        |       |        |      |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Freq  | Level   | Line   | Margin | Level  | Factor | Loss   | Factor | Factor | cm     | deg    |      |         |      |        |       |        |      |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| MHz   | dBuV/m  | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB     | dB     | cm     | deg    |      |         |      |        |       |        |      |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| 1     | 5320.00   | 100.95   | -----  | -----  | 92.41  | 34.50  | 10.74  | 36.70  | 0.00   | 266    | 116  | PEAK    |      |        |       |        |      |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Avg   | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5354.60</td> <td>36.86</td> <td>54.00</td> <td>-17.14</td> <td>28.24</td> <td>34.53</td> <td>10.75</td> <td>36.66</td> <td>0.00</td> <td>266</td> <td>116</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit  | Read   | Ant    | Cable  | Preamp | Aux    | APos   | TPos   | Remark | Freq | Level   | Line | Margin | Level | Factor | Loss | Factor | Factor | cm | deg | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | 1 | 5354.60 | 36.86 | 54.00 | -17.14 | 28.24 | 34.53 | 10.75 | 36.66 | 0.00 | 266 | 116 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>94.40</td> <td>-----</td> <td>-----</td> <td>85.86</td> <td>34.50</td> <td>10.74</td> <td>36.70</td> <td>0.00</td> <td>266</td> <td>116</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Factor | cm | deg | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | 1 | 5320.00 | 94.40  | ----- | ----- | 85.86 | 34.50 | 10.74 | 36.70 | 0.00 | 266 | 116 | AVERAGE |
|       | Limit   | Read   | Ant    | Cable  | Preamp | Aux    | APos   | TPos   | Remark |        |      |         |      |        |       |        |      |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Freq  | Level   | Line   | Margin | Level  | Factor | Loss   | Factor | Factor | cm     | deg    |      |         |      |        |       |        |      |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| MHz   | dBuV/m  | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB     | dB     | cm     | deg    |      |         |      |        |       |        |      |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| 1     | 5354.60   | 36.86  | 54.00  | -17.14 | 28.24  | 34.53  | 10.75  | 36.66  | 0.00   | 266    | 116  | AVERAGE |      |        |       |        |      |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Limit | Read  | Ant  | Cable  | Preamp | Aux    | APos   | TPos   | Remark |        |        |      |         |      |        |       |        |      |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Freq  | Level   | Line   | Margin | Level  | Factor | Loss   | Factor | Factor | cm     | deg    |      |         |      |        |       |        |      |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| MHz   | dBuV/m  | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB     | dB     | cm     | deg    |      |         |      |        |       |        |      |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| 1     | 5320.00   | 94.40  | -----  | -----  | 85.86  | 34.50  | 10.74  | 36.70  | 0.00   | 266    | 116  | AVERAGE |      |        |       |        |      |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |  |       |      |     |       |        |     |      |      |        |      |       |      |        |       |        |      |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |






|       |  | 21   |              |             |        |        |        |        |        |        |            |       |             |              |             |        |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |            |   |         |       |       |        |        |       |       |       |        |      |         |   |              |             |        |        |        |     |      |        |        |      |       |             |              |             |        |        |        |         |        |        |        |       |       |       |       |      |     |            |   |         |        |       |       |        |       |       |       |      |     |         |
|-------|--|--|--------------|-------------|--------|--------|--------|--------|--------|--------|------------|-------|-------------|--------------|-------------|--------|--------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|------------|---|---------|-------|-------|--------|--------|-------|-------|-------|--------|------|---------|---|--------------|-------------|--------|--------|--------|-----|------|--------|--------|------|-------|-------------|--------------|-------------|--------|--------|--------|---------|--------|--------|--------|-------|-------|-------|-------|------|-----|------------|---|---------|--------|-------|-------|--------|-------|-------|-------|------|-----|---------|
| Mode  |  | Band Edge  |              |             |        |        |        |        |        |        |            |       |             |              |             |        |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |            |   |         |       |       |        |        |       |       |       |        |      |         |   |              |             |        |        |        |     |      |        |        |      |       |             |              |             |        |        |        |         |        |        |        |       |       |       |       |      |     |            |   |         |        |       |       |        |       |       |       |      |     |         |
|       |  | U-NII-2A_5.47-5.725_802.11ax HE20_CH100_RU26/0_5500MHZ |              |             |        |        |        |        |        |        |            |       |             |              |             |        |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |            |   |         |       |       |        |        |       |       |       |        |      |         |   |              |             |        |        |        |     |      |        |        |      |       |             |              |             |        |        |        |         |        |        |        |       |       |       |       |      |     |            |   |         |        |       |       |        |       |       |       |      |     |         |
| ANT   |  | CDD 4+5  |              |             |        |        |        |        |        |        |            |       |             |              |             |        |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |            |   |         |       |       |        |        |       |       |       |        |      |         |   |              |             |        |        |        |     |      |        |        |      |       |             |              |             |        |        |        |         |        |        |        |       |       |       |       |      |     |            |   |         |        |       |       |        |       |       |       |      |     |         |
| Pol.  | Horizontal   | Fundamental  |              |             |        |        |        |        |        |        |            |       |             |              |             |        |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |            |   |         |       |       |        |        |       |       |       |        |      |         |   |              |             |        |        |        |     |      |        |        |      |       |             |              |             |        |        |        |         |        |        |        |       |       |       |       |      |     |            |   |         |        |       |       |        |       |       |       |      |     |         |
| Peak  | <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 5350 to 5510 MHz. A red horizontal line indicates the 5G BAND 1-3 limit at approximately 74 dBuV/m. A blue peak is visible at 5478 MHz, reaching approximately 110 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5308.08</td> <td>48.12</td> <td>74.00</td> <td>-25.88</td> <td>39.37</td> <td>34.58</td> <td>10.77</td> <td>36.60</td> <td>0.00</td> <td>110</td> <td>81 PEAK</td> </tr> <tr> <td>2</td> <td>5469.20</td> <td>47.13</td> <td>68.30</td> <td>-21.17</td> <td>38.16</td> <td>34.57</td> <td>10.85</td> <td>36.45</td> <td>0.00</td> <td>110</td> <td>81 PEAK</td> </tr> </tbody> </table> | Limit  | Read         | Ant         | Cable  | Preamp | Aux    | APos   | TPos   | Remark | Freq       | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor |  | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5308.08 | 48.12 | 74.00 | -25.88 | 39.37 | 34.58 | 10.77 | 36.60 | 0.00 | 110 | 81 PEAK    | 2   | 5469.20 | 47.13 | 68.30 | -21.17 | 38.16  | 34.57 | 10.85 | 36.45 | 0.00   | 110  | 81 PEAK | <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 1000 to 7000 MHz. A red horizontal line indicates the 5G BAND 1-3 limit at approximately 74 dBuV/m. A blue peak is visible at 5478 MHz, reaching approximately 110 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>110.69</td> <td>-----</td> <td>-----</td> <td>101.65</td> <td>34.56</td> <td>10.88</td> <td>36.40</td> <td>0.00</td> <td>110</td> <td>81 PEAK</td> </tr> </tbody> </table> | Limit        | Read        | Ant    | Cable  | Preamp | Aux | APos | TPos   | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor |         | MHz    | dBuV/m | dBuV/m | dB    | dBuV  | dB/m  | dB    | dB   | cm  | deg        | 1 | 5500.00 | 110.69 | ----- | ----- | 101.65 | 34.56 | 10.88 | 36.40 | 0.00 | 110 | 81 PEAK |
|       | Limit  | Read   | Ant          | Cable       | Preamp | Aux    | APos   | TPos   | Remark |        |            |       |             |              |             |        |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |            |   |         |       |       |        |        |       |       |       |        |      |         |   |              |             |        |        |        |     |      |        |        |      |       |             |              |             |        |        |        |         |        |        |        |       |       |       |       |      |     |            |   |         |        |       |       |        |       |       |       |      |     |         |
| Freq  | Level  | Line Margin  | Level Factor | Loss Factor | Factor | Factor | Factor |        |        |        |            |       |             |              |             |        |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |            |   |         |       |       |        |        |       |       |       |        |      |         |   |              |             |        |        |        |     |      |        |        |      |       |             |              |             |        |        |        |         |        |        |        |       |       |       |       |      |     |            |   |         |        |       |       |        |       |       |       |      |     |         |
| MHz   | dBuV/m   | dBuV/m   | dB           | dBuV        | dB/m   | dB     | dB     | cm     | deg    |        |            |       |             |              |             |        |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |            |   |         |       |       |        |        |       |       |       |        |      |         |   |              |             |        |        |        |     |      |        |        |      |       |             |              |             |        |        |        |         |        |        |        |       |       |       |       |      |     |            |   |         |        |       |       |        |       |       |       |      |     |         |
| 1     | 5308.08  | 48.12  | 74.00        | -25.88      | 39.37  | 34.58  | 10.77  | 36.60  | 0.00   | 110    | 81 PEAK    |       |             |              |             |        |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |            |   |         |       |       |        |        |       |       |       |        |      |         |   |              |             |        |        |        |     |      |        |        |      |       |             |              |             |        |        |        |         |        |        |        |       |       |       |       |      |     |            |   |         |        |       |       |        |       |       |       |      |     |         |
| 2     | 5469.20  | 47.13  | 68.30        | -21.17      | 38.16  | 34.57  | 10.85  | 36.45  | 0.00   | 110    | 81 PEAK    |       |             |              |             |        |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |            |   |         |       |       |        |        |       |       |       |        |      |         |   |              |             |        |        |        |     |      |        |        |      |       |             |              |             |        |        |        |         |        |        |        |       |       |       |       |      |     |            |   |         |        |       |       |        |       |       |       |      |     |         |
| Limit | Read   | Ant  | Cable        | Preamp      | Aux    | APos   | TPos   | Remark |        |        |            |       |             |              |             |        |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |            |   |         |       |       |        |        |       |       |       |        |      |         |   |              |             |        |        |        |     |      |        |        |      |       |             |              |             |        |        |        |         |        |        |        |       |       |       |       |      |     |            |   |         |        |       |       |        |       |       |       |      |     |         |
| Freq  | Level  | Line Margin  | Level Factor | Loss Factor | Factor | Factor | Factor |        |        |        |            |       |             |              |             |        |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |            |   |         |       |       |        |        |       |       |       |        |      |         |   |              |             |        |        |        |     |      |        |        |      |       |             |              |             |        |        |        |         |        |        |        |       |       |       |       |      |     |            |   |         |        |       |       |        |       |       |       |      |     |         |
| MHz   | dBuV/m   | dBuV/m   | dB           | dBuV        | dB/m   | dB     | dB     | cm     | deg    |        |            |       |             |              |             |        |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |            |   |         |       |       |        |        |       |       |       |        |      |         |   |              |             |        |        |        |     |      |        |        |      |       |             |              |             |        |        |        |         |        |        |        |       |       |       |       |      |     |            |   |         |        |       |       |        |       |       |       |      |     |         |
| 1     | 5500.00  | 110.69   | -----        | -----       | 101.65 | 34.56  | 10.88  | 36.40  | 0.00   | 110    | 81 PEAK    |       |             |              |             |        |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |            |   |         |       |       |        |        |       |       |       |        |      |         |   |              |             |        |        |        |     |      |        |        |      |       |             |              |             |        |        |        |         |        |        |        |       |       |       |       |      |     |            |   |         |        |       |       |        |       |       |       |      |     |         |
| Avg   | <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 5350 to 5510 MHz. A red horizontal line indicates the 5G BAND 1-3 (AVG) limit at approximately 54 dBuV/m. A blue peak is visible at 5478 MHz, reaching approximately 110 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5456.72</td> <td>38.51</td> <td>54.00</td> <td>-15.49</td> <td>29.56</td> <td>34.58</td> <td>10.84</td> <td>36.47</td> <td>0.00</td> <td>110</td> <td>81 AVERAGE</td> </tr> </tbody> </table>   | Limit  | Read         | Ant         | Cable  | Preamp | Aux    | APos   | TPos   | Remark | Freq       | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor |  | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5456.72 | 38.51 | 54.00 | -15.49 | 29.56 | 34.58 | 10.84 | 36.47 | 0.00 | 110 | 81 AVERAGE | <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 1000 to 7000 MHz. A red horizontal line indicates the 5G BAND 1-3 (AVG) limit at approximately 54 dBuV/m. A blue peak is visible at 5478 MHz, reaching approximately 110 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>103.06</td> <td>-----</td> <td>-----</td> <td>94.02</td> <td>34.56</td> <td>10.88</td> <td>36.40</td> <td>0.00</td> <td>110</td> <td>81 AVERAGE</td> </tr> </tbody> </table> | Limit   | Read  | Ant   | Cable  | Preamp | Aux   | APos  | TPos  | Remark | Freq | Level   | Line Margin   | Level Factor | Loss Factor | Factor | Factor | Factor |     | MHz  | dBuV/m | dBuV/m | dB   | dBuV  | dB/m        | dB           | dB          | cm     | deg    | 1      | 5500.00 | 103.06 | -----  | -----  | 94.02 | 34.56 | 10.88 | 36.40 | 0.00 | 110 | 81 AVERAGE |   |         |        |       |       |        |       |       |       |      |     |         |
|       | Limit  | Read   | Ant          | Cable       | Preamp | Aux    | APos   | TPos   | Remark |        |            |       |             |              |             |        |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |            |   |         |       |       |        |        |       |       |       |        |      |         |   |              |             |        |        |        |     |      |        |        |      |       |             |              |             |        |        |        |         |        |        |        |       |       |       |       |      |     |            |   |         |        |       |       |        |       |       |       |      |     |         |
| Freq  | Level  | Line Margin  | Level Factor | Loss Factor | Factor | Factor | Factor |        |        |        |            |       |             |              |             |        |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |            |   |         |       |       |        |        |       |       |       |        |      |         |   |              |             |        |        |        |     |      |        |        |      |       |             |              |             |        |        |        |         |        |        |        |       |       |       |       |      |     |            |   |         |        |       |       |        |       |       |       |      |     |         |
| MHz   | dBuV/m   | dBuV/m   | dB           | dBuV        | dB/m   | dB     | dB     | cm     | deg    |        |            |       |             |              |             |        |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |            |   |         |       |       |        |        |       |       |       |        |      |         |   |              |             |        |        |        |     |      |        |        |      |       |             |              |             |        |        |        |         |        |        |        |       |       |       |       |      |     |            |   |         |        |       |       |        |       |       |       |      |     |         |
| 1     | 5456.72  | 38.51  | 54.00        | -15.49      | 29.56  | 34.58  | 10.84  | 36.47  | 0.00   | 110    | 81 AVERAGE |       |             |              |             |        |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |            |   |         |       |       |        |        |       |       |       |        |      |         |   |              |             |        |        |        |     |      |        |        |      |       |             |              |             |        |        |        |         |        |        |        |       |       |       |       |      |     |            |   |         |        |       |       |        |       |       |       |      |     |         |
| Limit | Read   | Ant  | Cable        | Preamp      | Aux    | APos   | TPos   | Remark |        |        |            |       |             |              |             |        |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |            |   |         |       |       |        |        |       |       |       |        |      |         |   |              |             |        |        |        |     |      |        |        |      |       |             |              |             |        |        |        |         |        |        |        |       |       |       |       |      |     |            |   |         |        |       |       |        |       |       |       |      |     |         |
| Freq  | Level  | Line Margin  | Level Factor | Loss Factor | Factor | Factor | Factor |        |        |        |            |       |             |              |             |        |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |            |   |         |       |       |        |        |       |       |       |        |      |         |   |              |             |        |        |        |     |      |        |        |      |       |             |              |             |        |        |        |         |        |        |        |       |       |       |       |      |     |            |   |         |        |       |       |        |       |       |       |      |     |         |
| MHz   | dBuV/m   | dBuV/m   | dB           | dBuV        | dB/m   | dB     | dB     | cm     | deg    |        |            |       |             |              |             |        |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |            |   |         |       |       |        |        |       |       |       |        |      |         |   |              |             |        |        |        |     |      |        |        |      |       |             |              |             |        |        |        |         |        |        |        |       |       |       |       |      |     |            |   |         |        |       |       |        |       |       |       |      |     |         |
| 1     | 5500.00  | 103.06   | -----        | -----       | 94.02  | 34.56  | 10.88  | 36.40  | 0.00   | 110    | 81 AVERAGE |       |             |              |             |        |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |            |   |         |       |       |        |        |       |       |       |        |      |         |   |              |             |        |        |        |     |      |        |        |      |       |             |              |             |        |        |        |         |        |        |        |       |       |       |       |      |     |            |   |         |        |       |       |        |       |       |       |      |     |         |






| Mode  | 21   |             |              |             |             |        |        |        |        |        |      |         |             |              |             |             |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |         |       |       |        |        |       |       |       |        |      |       |             |  |             |             |        |        |        |     |        |        |        |      |       |             |              |             |             |        |         |       |       |        |        |       |       |       |      |     |     |         |   |         |       |       |       |       |       |       |       |      |     |     |      |
|-------|--|-------------|--------------|-------------|-------------|--------|--------|--------|--------|--------|------|---------|-------------|--------------|-------------|-------------|--------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|---|---------|-------|-------|--------|--------|-------|-------|-------|--------|------|-------|-------------|--|-------------|-------------|--------|--------|--------|-----|--------|--------|--------|------|-------|-------------|--------------|-------------|-------------|--------|---------|-------|-------|--------|--------|-------|-------|-------|------|-----|-----|---------|---|---------|-------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|
|       | Band Edge  |             |              |             |             |        |        |        |        |        |      |         |             |              |             |             |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |         |       |       |        |        |       |       |       |        |      |       |             |  |             |             |        |        |        |     |        |        |        |      |       |             |              |             |             |        |         |       |       |        |        |       |       |       |      |     |     |         |   |         |       |       |       |       |       |       |       |      |     |     |      |
|       | U-NII-2A_5.47-5.725_802.11ax HE20_CH100_RU26/0_5500MHz   |             |              |             |             |        |        |        |        |        |      |         |             |              |             |             |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |         |       |       |        |        |       |       |       |        |      |       |             |  |             |             |        |        |        |     |        |        |        |      |       |             |              |             |             |        |         |       |       |        |        |       |       |       |      |     |     |         |   |         |       |       |       |       |       |       |       |      |     |     |      |
| ANT   | CDD 4+5  |             |              |             |             |        |        |        |        |        |      |         |             |              |             |             |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |         |       |       |        |        |       |       |       |        |      |       |             |  |             |             |        |        |        |     |        |        |        |      |       |             |              |             |             |        |         |       |       |        |        |       |       |       |      |     |     |         |   |         |       |       |       |       |       |       |       |      |     |     |      |
| Pol.  | Vertical   | Fundamental |              |             |             |        |        |        |        |        |      |         |             |              |             |             |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |         |       |       |        |        |       |       |       |        |      |       |             |  |             |             |        |        |        |     |        |        |        |      |       |             |              |             |             |        |         |       |       |        |        |       |       |       |      |     |     |         |   |         |       |       |       |       |       |       |       |      |     |     |      |
| Peak  | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5423.12</td> <td>48.00</td> <td>74.00</td> <td>-25.92</td> <td>39.22</td> <td>34.59</td> <td>10.80</td> <td>36.53</td> <td>0.00</td> <td>300</td> <td>135</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5467.76</td> <td>48.01</td> <td>68.30</td> <td>-20.29</td> <td>39.04</td> <td>34.57</td> <td>10.85</td> <td>36.45</td> <td>0.00</td> <td>300</td> <td>135</td> <td>PEAK</td> </tr> </tbody> </table> | Limit       | Read         | Ant         | Cable       | Preamp | Aux    | APos   | TPos   | Remark | Freq | Level   | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | Factor |  | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5423.12 | 48.00 | 74.00 | -25.92 | 39.22 | 34.59 | 10.80 | 36.53 | 0.00 | 300 | 135 | PEAK    | 2   | 5467.76 | 48.01 | 68.30 | -20.29 | 39.04  | 34.57 | 10.85 | 36.45 | 0.00   | 300  | 135   | PEAK        | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>99.05</td> <td>-----</td> <td>-----</td> <td>90.01</td> <td>34.56</td> <td>10.88</td> <td>36.40</td> <td>0.00</td> <td>300</td> <td>135</td> <td>PEAK</td> </tr> </tbody> </table> | Limit       | Read        | Ant    | Cable  | Preamp | Aux | APos   | TPos   | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | Factor  |       | MHz   | dBuV/m | dBuV/m | dB    | dBuV  | dB/m  | dB   | dB  | cm  | deg     | 1 | 5500.00 | 99.05 | ----- | ----- | 90.01 | 34.56 | 10.88 | 36.40 | 0.00 | 300 | 135 | PEAK |
|       | Limit  | Read        | Ant          | Cable       | Preamp      | Aux    | APos   | TPos   | Remark |        |      |         |             |              |             |             |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |         |       |       |        |        |       |       |       |        |      |       |             |  |             |             |        |        |        |     |        |        |        |      |       |             |              |             |             |        |         |       |       |        |        |       |       |       |      |     |     |         |   |         |       |       |       |       |       |       |       |      |     |     |      |
| Freq  | Level  | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | Factor |        |        |        |      |         |             |              |             |             |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |         |       |       |        |        |       |       |       |        |      |       |             |  |             |             |        |        |        |     |        |        |        |      |       |             |              |             |             |        |         |       |       |        |        |       |       |       |      |     |     |         |   |         |       |       |       |       |       |       |       |      |     |     |      |
| MHz   | dBuV/m   | dBuV/m      | dB           | dBuV        | dB/m        | dB     | dB     | cm     | deg    |        |      |         |             |              |             |             |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |         |       |       |        |        |       |       |       |        |      |       |             |  |             |             |        |        |        |     |        |        |        |      |       |             |              |             |             |        |         |       |       |        |        |       |       |       |      |     |     |         |   |         |       |       |       |       |       |       |       |      |     |     |      |
| 1     | 5423.12  | 48.00       | 74.00        | -25.92      | 39.22       | 34.59  | 10.80  | 36.53  | 0.00   | 300    | 135  | PEAK    |             |              |             |             |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |         |       |       |        |        |       |       |       |        |      |       |             |  |             |             |        |        |        |     |        |        |        |      |       |             |              |             |             |        |         |       |       |        |        |       |       |       |      |     |     |         |   |         |       |       |       |       |       |       |       |      |     |     |      |
| 2     | 5467.76  | 48.01       | 68.30        | -20.29      | 39.04       | 34.57  | 10.85  | 36.45  | 0.00   | 300    | 135  | PEAK    |             |              |             |             |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |         |       |       |        |        |       |       |       |        |      |       |             |  |             |             |        |        |        |     |        |        |        |      |       |             |              |             |             |        |         |       |       |        |        |       |       |       |      |     |     |         |   |         |       |       |       |       |       |       |       |      |     |     |      |
| Limit | Read   | Ant         | Cable        | Preamp      | Aux         | APos   | TPos   | Remark |        |        |      |         |             |              |             |             |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |         |       |       |        |        |       |       |       |        |      |       |             |  |             |             |        |        |        |     |        |        |        |      |       |             |              |             |             |        |         |       |       |        |        |       |       |       |      |     |     |         |   |         |       |       |       |       |       |       |       |      |     |     |      |
| Freq  | Level  | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | Factor |        |        |        |      |         |             |              |             |             |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |         |       |       |        |        |       |       |       |        |      |       |             |  |             |             |        |        |        |     |        |        |        |      |       |             |              |             |             |        |         |       |       |        |        |       |       |       |      |     |     |         |   |         |       |       |       |       |       |       |       |      |     |     |      |
| MHz   | dBuV/m   | dBuV/m      | dB           | dBuV        | dB/m        | dB     | dB     | cm     | deg    |        |      |         |             |              |             |             |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |         |       |       |        |        |       |       |       |        |      |       |             |  |             |             |        |        |        |     |        |        |        |      |       |             |              |             |             |        |         |       |       |        |        |       |       |       |      |     |     |         |   |         |       |       |       |       |       |       |       |      |     |     |      |
| 1     | 5500.00  | 99.05       | -----        | -----       | 90.01       | 34.56  | 10.88  | 36.40  | 0.00   | 300    | 135  | PEAK    |             |              |             |             |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |         |       |       |        |        |       |       |       |        |      |       |             |  |             |             |        |        |        |     |        |        |        |      |       |             |              |             |             |        |         |       |       |        |        |       |       |       |      |     |     |         |   |         |       |       |       |       |       |       |       |      |     |     |      |
| Avg   | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5409.04</td> <td>37.28</td> <td>54.00</td> <td>-16.72</td> <td>28.46</td> <td>34.60</td> <td>10.78</td> <td>36.56</td> <td>0.00</td> <td>300</td> <td>135</td> <td>AVERAGE</td> </tr> </tbody> </table>   | Limit       | Read         | Ant         | Cable       | Preamp | Aux    | APos   | TPos   | Remark | Freq | Level   | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | Factor |  | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5409.04 | 37.28 | 54.00 | -16.72 | 28.46 | 34.60 | 10.78 | 36.56 | 0.00 | 300 | 135 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>93.60</td> <td>-----</td> <td>-----</td> <td>84.56</td> <td>34.56</td> <td>10.88</td> <td>36.40</td> <td>0.00</td> <td>300</td> <td>135</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit   | Read  | Ant   | Cable  | Preamp | Aux   | APos  | TPos  | Remark | Freq | Level | Line Margin | Level Factor   | Loss Factor | Loss Factor | Factor | Factor |        | MHz | dBuV/m | dBuV/m | dB     | dBuV | dB/m  | dB          | dB           | cm          | deg         | 1      | 5500.00 | 93.60 | ----- | -----  | 84.56  | 34.56 | 10.88 | 36.40 | 0.00 | 300 | 135 | AVERAGE |   |         |       |       |       |       |       |       |       |      |     |     |      |
| Limit | Read   | Ant         | Cable        | Preamp      | Aux         | APos   | TPos   | Remark |        |        |      |         |             |              |             |             |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |         |       |       |        |        |       |       |       |        |      |       |             |  |             |             |        |        |        |     |        |        |        |      |       |             |              |             |             |        |         |       |       |        |        |       |       |       |      |     |     |         |   |         |       |       |       |       |       |       |       |      |     |     |      |
| Freq  | Level  | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | Factor |        |        |        |      |         |             |              |             |             |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |         |       |       |        |        |       |       |       |        |      |       |             |  |             |             |        |        |        |     |        |        |        |      |       |             |              |             |             |        |         |       |       |        |        |       |       |       |      |     |     |         |   |         |       |       |       |       |       |       |       |      |     |     |      |
| MHz   | dBuV/m   | dBuV/m      | dB           | dBuV        | dB/m        | dB     | dB     | cm     | deg    |        |      |         |             |              |             |             |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |         |       |       |        |        |       |       |       |        |      |       |             |  |             |             |        |        |        |     |        |        |        |      |       |             |              |             |             |        |         |       |       |        |        |       |       |       |      |     |     |         |   |         |       |       |       |       |       |       |       |      |     |     |      |
| 1     | 5409.04  | 37.28       | 54.00        | -16.72      | 28.46       | 34.60  | 10.78  | 36.56  | 0.00   | 300    | 135  | AVERAGE |             |              |             |             |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |         |       |       |        |        |       |       |       |        |      |       |             |  |             |             |        |        |        |     |        |        |        |      |       |             |              |             |             |        |         |       |       |        |        |       |       |       |      |     |     |         |   |         |       |       |       |       |       |       |       |      |     |     |      |
| Limit | Read   | Ant         | Cable        | Preamp      | Aux         | APos   | TPos   | Remark |        |        |      |         |             |              |             |             |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |         |       |       |        |        |       |       |       |        |      |       |             |  |             |             |        |        |        |     |        |        |        |      |       |             |              |             |             |        |         |       |       |        |        |       |       |       |      |     |     |         |   |         |       |       |       |       |       |       |       |      |     |     |      |
| Freq  | Level  | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor | Factor |        |        |        |      |         |             |              |             |             |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |         |       |       |        |        |       |       |       |        |      |       |             |  |             |             |        |        |        |     |        |        |        |      |       |             |              |             |             |        |         |       |       |        |        |       |       |       |      |     |     |         |   |         |       |       |       |       |       |       |       |      |     |     |      |
| MHz   | dBuV/m   | dBuV/m      | dB           | dBuV        | dB/m        | dB     | dB     | cm     | deg    |        |      |         |             |              |             |             |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |         |       |       |        |        |       |       |       |        |      |       |             |  |             |             |        |        |        |     |        |        |        |      |       |             |              |             |             |        |         |       |       |        |        |       |       |       |      |     |     |         |   |         |       |       |       |       |       |       |       |      |     |     |      |
| 1     | 5500.00  | 93.60       | -----        | -----       | 84.56       | 34.56  | 10.88  | 36.40  | 0.00   | 300    | 135  | AVERAGE |             |              |             |             |        |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |         |       |       |        |        |       |       |       |        |      |       |             |  |             |             |        |        |        |     |        |        |        |      |       |             |              |             |             |        |         |       |       |        |        |       |       |       |      |     |     |         |   |         |       |       |       |       |       |       |       |      |     |     |      |


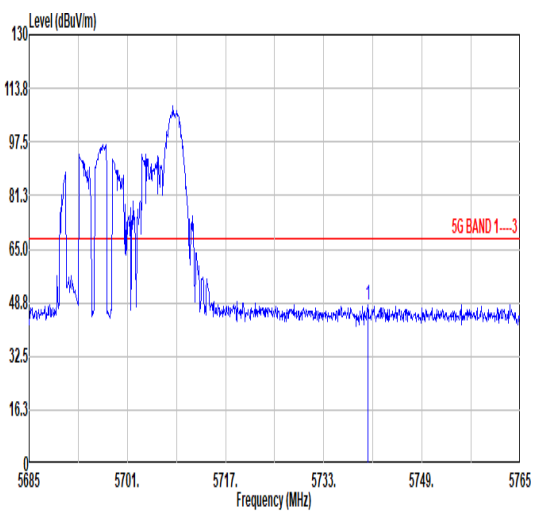
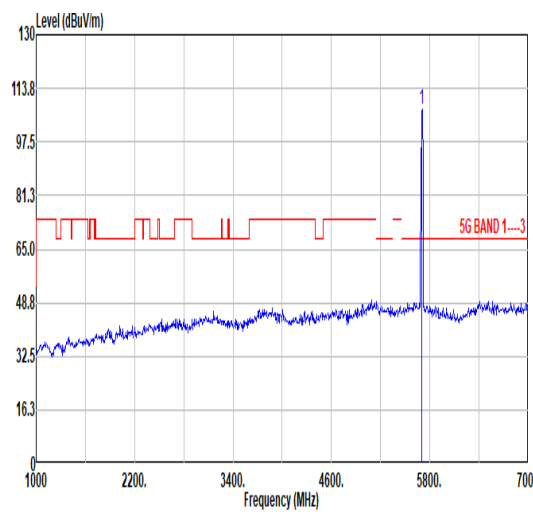
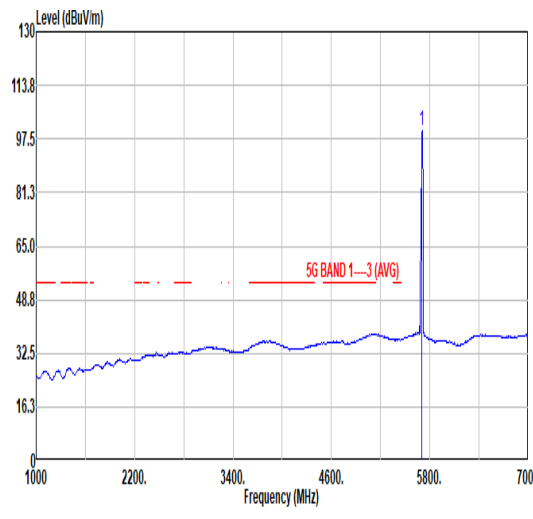


| Mode      | 22   |   |        |        |        |        |            |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |         |
|-----------|--|---|--------|--------|--------|--------|------------|------|------|------|-------|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|------|------|------|----|-----------|-----------|-------|--------|-------|-------|-------|-------|-------|--|--|--|--|--|------|------|-----|--|--|--|--|--|--|---------|--|-------|------|-----|-------|--------|-----|------|------|------|-------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|-----------|--------|-------|-------|-------|-------|-------|-------|--|--|--|--|--|--|------|-----|--|--|--|--|--|--|--|---------|
|           | Band Edge  |   |        |        |        |        |            |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |         |
|           | U-NII-2C_5.47-5.725_802.11ax HE20_CH140_RU26/8_5700MHz   |   |        |        |        |        |            |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |         |
| ANT       | CDD 4+5  |   |        |        |        |        |            |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |         |
| Pol.      | Horizontal   | Fundamental   |        |        |        |        |            |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |         |
| Peak      |  <table border="1" data-bbox="263 1131 782 1254"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5740.20</td> <td>47.98</td> <td>68.30</td> <td>-20.32</td> <td>39.94</td> <td>34.72</td> <td>11.20</td> <td>37.88</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>100</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>80 PEAK</td> </tr> </tbody> </table> | Limit   | Read   | Ant    | Cable  | Preamp | Aux        | APos | TPos | Freq | Level | Line  | Margin | Level  | Factor | Loss   | Factor | MHz    | dBuV/m | dBuV/m | dB     | dBuV | dB/m | dB   | dB | 1 5740.20 | 47.98     | 68.30 | -20.32 | 39.94 | 34.72 | 11.20 | 37.88 |       |  |  |  |  |  | 0.00 | 100  |     |  |  |  |  |  |  | 80 PEAK |  <table border="1" data-bbox="901 1131 1420 1254"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>107.56</td> <td>-----</td> <td>-----</td> <td>99.11</td> <td>34.64</td> <td>11.16</td> <td>37.35</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>100</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>80 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 5700.00 | 107.56 | ----- | ----- | 99.11 | 34.64 | 11.16 | 37.35 |  |  |  |  |  |  | 0.00 | 100 |  |  |  |  |  |  |  | 80 PEAK |
| Limit     | Read   | Ant   | Cable  | Preamp | Aux    | APos   | TPos       |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |         |
| Freq      | Level  | Line  | Margin | Level  | Factor | Loss   | Factor     |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |         |
| MHz       | dBuV/m   | dBuV/m  | dB     | dBuV   | dB/m   | dB     | dB         |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |         |
| 1 5740.20 | 47.98  | 68.30   | -20.32 | 39.94  | 34.72  | 11.20  | 37.88      |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |         |
|           |  |   |        |        |        | 0.00   | 100        |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |         |
|           |  |   |        |        |        |        | 80 PEAK    |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |         |
| Limit     | Read   | Ant   | Cable  | Preamp | Aux    | APos   | TPos       |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |         |
| Freq      | Level  | Line  | Margin | Level  | Factor | Loss   | Factor     |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |         |
| MHz       | dBuV/m   | dBuV/m  | dB     | dBuV   | dB/m   | dB     | dB         |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |         |
| 1 5700.00 | 107.56   | -----   | -----  | 99.11  | 34.64  | 11.16  | 37.35      |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |         |
|           |  |   |        |        |        | 0.00   | 100        |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |         |
|           |  |   |        |        |        |        | 80 PEAK    |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |         |
| Avg       | Blank  |  <table border="1" data-bbox="901 1814 1420 1937"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>99.94</td> <td>-----</td> <td>-----</td> <td>91.49</td> <td>34.64</td> <td>11.16</td> <td>37.35</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>100</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>80 AVERAGE</td> </tr> </tbody> </table> | Limit  | Read   | Ant    | Cable  | Preamp     | Aux  | APos | TPos | Freq  | Level | Line   | Margin | Level  | Factor | Loss   | Factor | MHz    | dBuV/m | dBuV/m | dB   | dBuV | dB/m | dB | dB        | 1 5700.00 | 99.94 | -----  | ----- | 91.49 | 34.64 | 11.16 | 37.35 |  |  |  |  |  |      | 0.00 | 100 |  |  |  |  |  |  |         | 80 AVERAGE   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |         |
| Limit     | Read   | Ant   | Cable  | Preamp | Aux    | APos   | TPos       |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |         |
| Freq      | Level  | Line  | Margin | Level  | Factor | Loss   | Factor     |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |         |
| MHz       | dBuV/m   | dBuV/m  | dB     | dBuV   | dB/m   | dB     | dB         |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |         |
| 1 5700.00 | 99.94  | -----   | -----  | 91.49  | 34.64  | 11.16  | 37.35      |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |         |
|           |  |   |        |        |        | 0.00   | 100        |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |         |
|           |  |   |        |        |        |        | 80 AVERAGE |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |         |

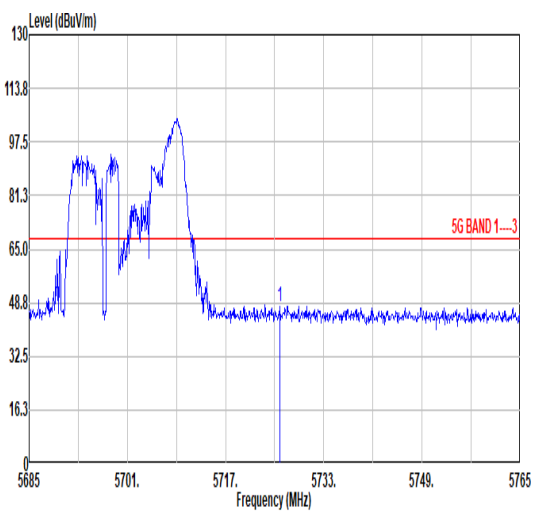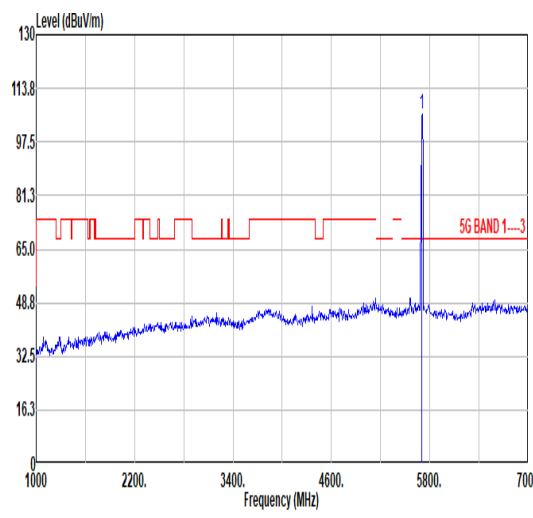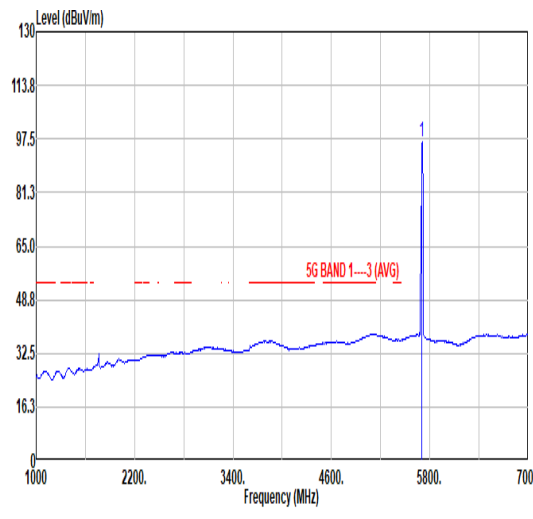





| Mode      | 22   |  |        |        |        |        |             |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |  |  |  |  |  |  |  |  |     |      |  |  |  |  |  |  |          |   |       |      |     |       |        |     |      |             |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |      |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |          |
|-----------|--|--|--------|--------|--------|--------|-------------|------|------|------|-------|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|------|------|------|----|-----------|-----------|-------|--------|-------|-------|-------|-------|-------|--|--|--|--|--|------|--|--|--|--|--|--|--|--|-----|------|--|--|--|--|--|--|----------|---|-------|------|-----|-------|--------|-----|------|-------------|------|-------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|-----------|--------|-------|-------|-------|-------|-------|-------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|------|--|--|--|--|--|--|--|-----|--|--|--|--|--|--|--|----------|
|           | Band Edge  |  |        |        |        |        |             |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |  |  |  |  |  |  |  |  |     |      |  |  |  |  |  |  |          |   |       |      |     |       |        |     |      |             |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |      |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |          |
|           | U-NII-2C_5.47-5.725_802.11ax HE20_CH140_RU26/8_5700MHz   |  |        |        |        |        |             |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |  |  |  |  |  |  |  |  |     |      |  |  |  |  |  |  |          |   |       |      |     |       |        |     |      |             |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |      |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |          |
| ANT       | CDD 4+5  |  |        |        |        |        |             |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |  |  |  |  |  |  |  |  |     |      |  |  |  |  |  |  |          |   |       |      |     |       |        |     |      |             |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |      |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |          |
| Pol.      | Vertical   | Fundamental  |        |        |        |        |             |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |  |  |  |  |  |  |  |  |     |      |  |  |  |  |  |  |          |   |       |      |     |       |        |     |      |             |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |      |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |          |
| Peak      |  <table border="1" data-bbox="263 1131 782 1254"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5725.88</td> <td>47.55</td> <td>68.30</td> <td>-20.75</td> <td>39.32</td> <td>34.68</td> <td>11.18</td> <td>37.63</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>316</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>239 PEAK</td> </tr> </tbody> </table> | Limit  | Read   | Ant    | Cable  | Preamp | Aux         | APos | TPos | Freq | Level | Line  | Margin | Level  | Factor | Loss   | Factor | MHz    | dBuV/m | dBuV/m | dB     | dBuV | dB/m | dB   | dB | 1 5725.88 | 47.55     | 68.30 | -20.75 | 39.32 | 34.68 | 11.18 | 37.63 |       |  |  |  |  |  | 0.00 |  |  |  |  |  |  |  |  | 316 |      |  |  |  |  |  |  | 239 PEAK |  <table border="1" data-bbox="901 1131 1420 1254"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>105.99</td> <td>-----</td> <td>-----</td> <td>97.54</td> <td>34.64</td> <td>11.16</td> <td>37.35</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>316</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>239 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos        | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 5700.00 | 105.99 | ----- | ----- | 97.54 | 34.64 | 11.16 | 37.35 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  | 0.00 |  |  |  |  |  |  |  | 316 |  |  |  |  |  |  |  | 239 PEAK |
| Limit     | Read   | Ant  | Cable  | Preamp | Aux    | APos   | TPos        |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |  |  |  |  |  |  |  |  |     |      |  |  |  |  |  |  |          |   |       |      |     |       |        |     |      |             |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |      |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |          |
| Freq      | Level  | Line   | Margin | Level  | Factor | Loss   | Factor      |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |  |  |  |  |  |  |  |  |     |      |  |  |  |  |  |  |          |   |       |      |     |       |        |     |      |             |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |      |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |          |
| MHz       | dBuV/m   | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB          |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |  |  |  |  |  |  |  |  |     |      |  |  |  |  |  |  |          |   |       |      |     |       |        |     |      |             |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |      |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |          |
| 1 5725.88 | 47.55  | 68.30  | -20.75 | 39.32  | 34.68  | 11.18  | 37.63       |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |  |  |  |  |  |  |  |  |     |      |  |  |  |  |  |  |          |   |       |      |     |       |        |     |      |             |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |      |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |          |
|           |  |  |        |        |        | 0.00   |             |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |  |  |  |  |  |  |  |  |     |      |  |  |  |  |  |  |          |   |       |      |     |       |        |     |      |             |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |      |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |          |
|           |  |  |        |        |        |        | 316         |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |  |  |  |  |  |  |  |  |     |      |  |  |  |  |  |  |          |   |       |      |     |       |        |     |      |             |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |      |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |          |
|           |  |  |        |        |        |        | 239 PEAK    |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |  |  |  |  |  |  |  |  |     |      |  |  |  |  |  |  |          |   |       |      |     |       |        |     |      |             |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |      |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |          |
| Limit     | Read   | Ant  | Cable  | Preamp | Aux    | APos   | TPos        |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |  |  |  |  |  |  |  |  |     |      |  |  |  |  |  |  |          |   |       |      |     |       |        |     |      |             |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |      |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |          |
| Freq      | Level  | Line   | Margin | Level  | Factor | Loss   | Factor      |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |  |  |  |  |  |  |  |  |     |      |  |  |  |  |  |  |          |   |       |      |     |       |        |     |      |             |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |      |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |          |
| MHz       | dBuV/m   | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB          |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |  |  |  |  |  |  |  |  |     |      |  |  |  |  |  |  |          |   |       |      |     |       |        |     |      |             |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |      |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |          |
| 1 5700.00 | 105.99   | -----  | -----  | 97.54  | 34.64  | 11.16  | 37.35       |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |  |  |  |  |  |  |  |  |     |      |  |  |  |  |  |  |          |   |       |      |     |       |        |     |      |             |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |      |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |          |
|           |  |  |        |        |        |        |             |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |  |  |  |  |  |  |  |  |     |      |  |  |  |  |  |  |          |   |       |      |     |       |        |     |      |             |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |      |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |          |
|           |  |  |        |        |        |        | 0.00        |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |  |  |  |  |  |  |  |  |     |      |  |  |  |  |  |  |          |   |       |      |     |       |        |     |      |             |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |      |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |          |
|           |  |  |        |        |        |        | 316         |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |  |  |  |  |  |  |  |  |     |      |  |  |  |  |  |  |          |   |       |      |     |       |        |     |      |             |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |      |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |          |
|           |  |  |        |        |        |        | 239 PEAK    |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |  |  |  |  |  |  |  |  |     |      |  |  |  |  |  |  |          |   |       |      |     |       |        |     |      |             |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |      |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |          |
| Avg       | Blank  |  <table border="1" data-bbox="901 1814 1420 1937"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>96.62</td> <td>-----</td> <td>-----</td> <td>88.17</td> <td>34.64</td> <td>11.16</td> <td>37.35</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>316</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>239 AVERAGE</td> </tr> </tbody> </table> | Limit  | Read   | Ant    | Cable  | Preamp      | Aux  | APos | TPos | Freq  | Level | Line   | Margin | Level  | Factor | Loss   | Factor | MHz    | dBuV/m | dBuV/m | dB   | dBuV | dB/m | dB | dB        | 1 5700.00 | 96.62 | -----  | ----- | 88.17 | 34.64 | 11.16 | 37.35 |  |  |  |  |  |      |  |  |  |  |  |  |  |  |     | 0.00 |  |  |  |  |  |  |          | 316   |       |      |     |       |        |     |      | 239 AVERAGE |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |      |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |          |
| Limit     | Read   | Ant  | Cable  | Preamp | Aux    | APos   | TPos        |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |  |  |  |  |  |  |  |  |     |      |  |  |  |  |  |  |          |   |       |      |     |       |        |     |      |             |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |      |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |          |
| Freq      | Level  | Line   | Margin | Level  | Factor | Loss   | Factor      |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |  |  |  |  |  |  |  |  |     |      |  |  |  |  |  |  |          |   |       |      |     |       |        |     |      |             |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |      |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |          |
| MHz       | dBuV/m   | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB          |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |  |  |  |  |  |  |  |  |     |      |  |  |  |  |  |  |          |   |       |      |     |       |        |     |      |             |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |      |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |          |
| 1 5700.00 | 96.62  | -----  | -----  | 88.17  | 34.64  | 11.16  | 37.35       |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |  |  |  |  |  |  |  |  |     |      |  |  |  |  |  |  |          |   |       |      |     |       |        |     |      |             |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |      |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |          |
|           |  |  |        |        |        |        |             |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |  |  |  |  |  |  |  |  |     |      |  |  |  |  |  |  |          |   |       |      |     |       |        |     |      |             |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |      |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |          |
|           |  |  |        |        |        |        | 0.00        |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |  |  |  |  |  |  |  |  |     |      |  |  |  |  |  |  |          |   |       |      |     |       |        |     |      |             |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |      |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |          |
|           |  |  |        |        |        |        | 316         |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |  |  |  |  |  |  |  |  |     |      |  |  |  |  |  |  |          |   |       |      |     |       |        |     |      |             |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |      |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |          |
|           |  |  |        |        |        |        | 239 AVERAGE |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |  |  |  |  |  |  |  |  |     |      |  |  |  |  |  |  |          |   |       |      |     |       |        |     |      |             |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |      |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |          |

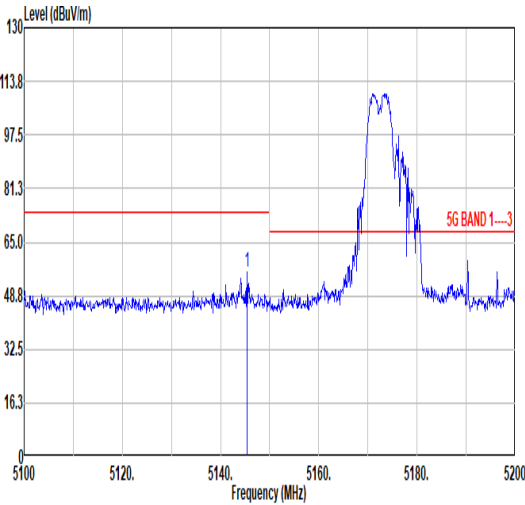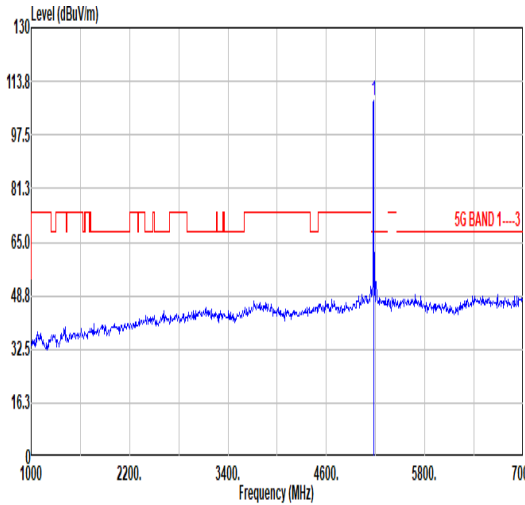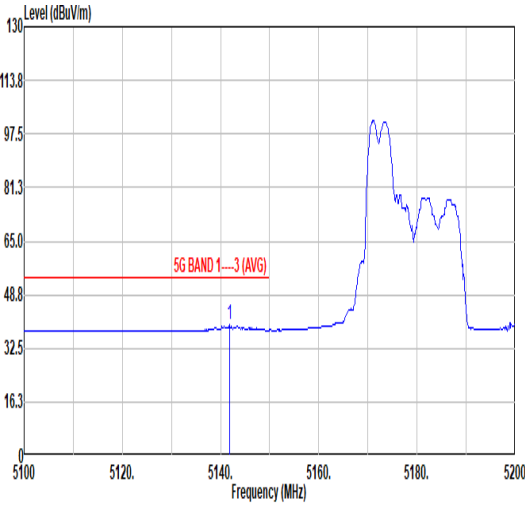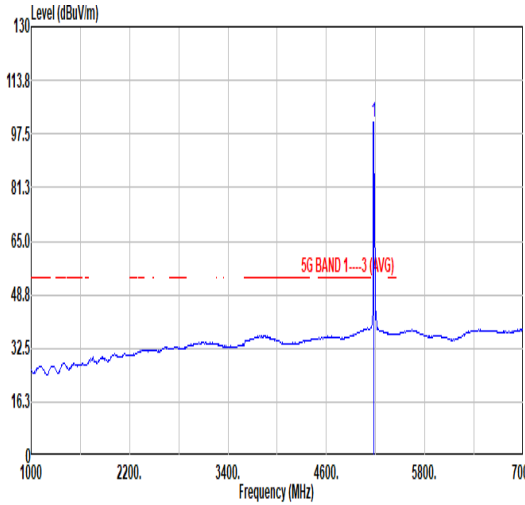





|       |  | 23          |        |        |        |        |        |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |        |       |       |       |      |     |    |         |
|-------|--|-------------|--------|--------|--------|--------|--------|-------|------|------|-------|---------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|--|--|--|--|--|--|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|----|---------|---|-------|------|-----|-------|--------|-----|------|------|------|-------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|--|--|--|--|--|--|----|-----|---|---------|--------|-------|-------|--------|-------|-------|-------|------|-----|----|---------|
| Mode  | Band Edge  |             |        |        |        |        |        |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |        |       |       |       |      |     |    |         |
|       | U-NII-1_5.15-5.25_802.11ax HE20_CH36_RU52/37_5180MHZ   |             |        |        |        |        |        |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |        |       |       |       |      |     |    |         |
| ANT   | CDD 4+5  |             |        |        |        |        |        |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Pol.  | Horizontal   | Fundamental |        |        |        |        |        |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Peak  |  <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>5G BAND 1-3</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5145.40</td> <td>55.85</td> <td>74.00</td> <td>-18.15</td> <td>48.09</td> <td>34.22</td> <td>10.60</td> <td>37.06</td> <td>0.00</td> <td>100</td> <td>64</td> <td>PEAK</td> </tr> </tbody> </table>           | Limit       | Read   | Ant    | Cable  | Preamp | Aux    | APos  | TPos | Freq | Level | Line    | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB |  |  |  |  |  |  | cm | deg | 1 | 5145.40 | 55.85 | 74.00 | -18.15 | 48.09 | 34.22 | 10.60 | 37.06 | 0.00 | 100 | 64 | PEAK    |  <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>5G BAND 1-3</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>108.10</td> <td>68.30</td> <td>39.80</td> <td>100.19</td> <td>34.27</td> <td>10.64</td> <td>37.00</td> <td>0.00</td> <td>100</td> <td>64</td> <td>PEAK</td> </tr> </tbody> </table>          | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB |  |  |  |  |  |  | cm | deg | 1 | 5180.00 | 108.10 | 68.30 | 39.80 | 100.19 | 34.27 | 10.64 | 37.00 | 0.00 | 100 | 64 | PEAK    |
|       | Limit  | Read        | Ant    | Cable  | Preamp | Aux    | APos   | TPos  |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Freq  | Level  | Line        | Margin | Level  | Factor | Loss   | Factor |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |        |       |       |       |      |     |    |         |
| MHz   | dBuV/m   | dBuV/m      | dB     | dBuV   | dB/m   | dB     | dB     |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |        |       |       |       |      |     |    |         |
|       |  |             |        |        |        | cm     | deg    |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |        |       |       |       |      |     |    |         |
| 1     | 5145.40  | 55.85       | 74.00  | -18.15 | 48.09  | 34.22  | 10.60  | 37.06 | 0.00 | 100  | 64    | PEAK    |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Limit | Read   | Ant         | Cable  | Preamp | Aux    | APos   | TPos   |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Freq  | Level  | Line        | Margin | Level  | Factor | Loss   | Factor |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |        |       |       |       |      |     |    |         |
| MHz   | dBuV/m   | dBuV/m      | dB     | dBuV   | dB/m   | dB     | dB     |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |        |       |       |       |      |     |    |         |
|       |  |             |        |        |        | cm     | deg    |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |        |       |       |       |      |     |    |         |
| 1     | 5180.00  | 108.10      | 68.30  | 39.80  | 100.19 | 34.27  | 10.64  | 37.00 | 0.00 | 100  | 64    | PEAK    |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Avg   |  <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>5G BAND 1-3 (AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5141.00</td> <td>39.59</td> <td>54.00</td> <td>-14.41</td> <td>31.83</td> <td>34.22</td> <td>10.60</td> <td>37.06</td> <td>0.00</td> <td>100</td> <td>64</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit       | Read   | Ant    | Cable  | Preamp | Aux    | APos  | TPos | Freq | Level | Line    | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB |  |  |  |  |  |  | cm | deg | 1 | 5141.00 | 39.59 | 54.00 | -14.41 | 31.83 | 34.22 | 10.60 | 37.06 | 0.00 | 100 | 64 | AVERAGE |  <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>5G BAND 1-3 (AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>101.19</td> <td>68.30</td> <td>32.89</td> <td>93.31</td> <td>34.26</td> <td>10.63</td> <td>37.01</td> <td>0.00</td> <td>100</td> <td>64</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB |  |  |  |  |  |  | cm | deg | 1 | 5180.00 | 101.19 | 68.30 | 32.89 | 93.31  | 34.26 | 10.63 | 37.01 | 0.00 | 100 | 64 | AVERAGE |
|       | Limit  | Read        | Ant    | Cable  | Preamp | Aux    | APos   | TPos  |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Freq  | Level  | Line        | Margin | Level  | Factor | Loss   | Factor |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |        |       |       |       |      |     |    |         |
| MHz   | dBuV/m   | dBuV/m      | dB     | dBuV   | dB/m   | dB     | dB     |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |        |       |       |       |      |     |    |         |
|       |  |             |        |        |        | cm     | deg    |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |        |       |       |       |      |     |    |         |
| 1     | 5141.00  | 39.59       | 54.00  | -14.41 | 31.83  | 34.22  | 10.60  | 37.06 | 0.00 | 100  | 64    | AVERAGE |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Limit | Read   | Ant         | Cable  | Preamp | Aux    | APos   | TPos   |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Freq  | Level  | Line        | Margin | Level  | Factor | Loss   | Factor |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |        |       |       |       |      |     |    |         |
| MHz   | dBuV/m   | dBuV/m      | dB     | dBuV   | dB/m   | dB     | dB     |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |        |       |       |       |      |     |    |         |
|       |  |             |        |        |        | cm     | deg    |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |        |       |       |       |      |     |    |         |
| 1     | 5180.00  | 101.19      | 68.30  | 32.89  | 93.31  | 34.26  | 10.63  | 37.01 | 0.00 | 100  | 64    | AVERAGE |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |        |       |       |       |      |     |    |         |



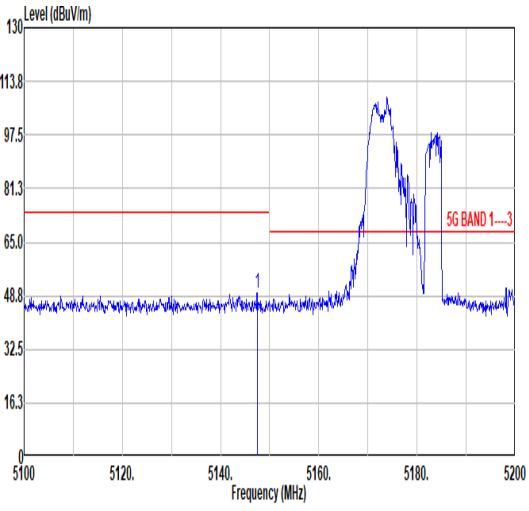
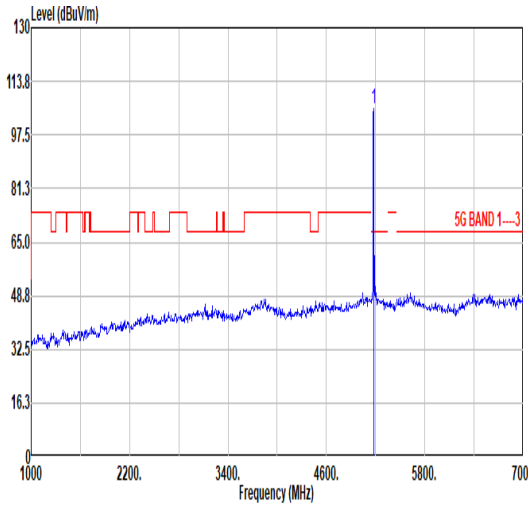
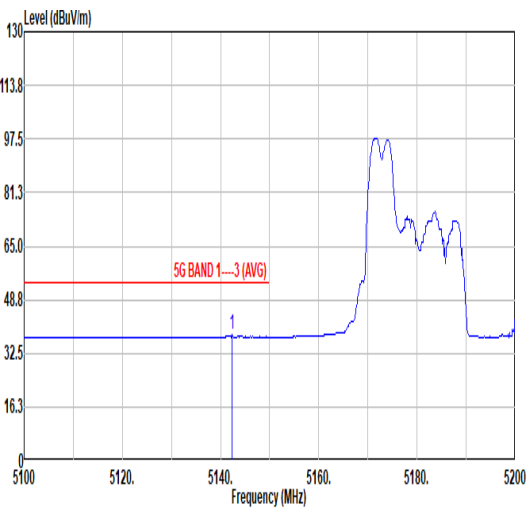
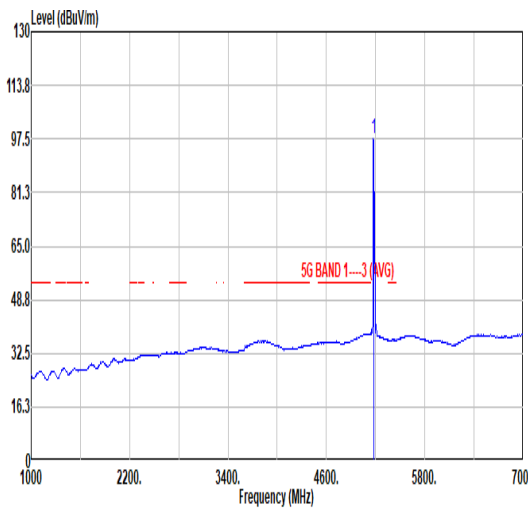


|       |   | 23          |        |        |        |        |        |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
|-------|---|-------------|--------|--------|--------|--------|--------|-------|------|------|-------|---------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|--|--|--|--|--|--|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|---|-------|------|-----|-------|--------|-----|------|------|------|-------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|--|--|--|--|--|--|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|
| Mode  | Band Edge   |             |        |        |        |        |        |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
|       | U-NII-1_5.15-5.25_802.11ax HE20_CH36_RU52/37_5180MHz  |             |        |        |        |        |        |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| ANT   | CDD 4+5   |             |        |        |        |        |        |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Pol.  | Vertical  | Fundamental |        |        |        |        |        |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Peak  |  <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>5G BAND 1-3</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5147.50</td> <td>49.76</td> <td>74.00</td> <td>-24.24</td> <td>41.98</td> <td>34.22</td> <td>10.61</td> <td>37.05</td> <td>0.00</td> <td>362</td> <td>229</td> <td>PEAK</td> </tr> </tbody> </table>           | Limit       | Read   | Ant    | Cable  | Preamp | Aux    | APos  | TPos | Freq | Level | Line    | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB |  |  |  |  |  |  | cm | deg | 1 | 5147.50 | 49.76 | 74.00 | -24.24 | 41.98 | 34.22 | 10.61 | 37.05 | 0.00 | 362 | 229 | PEAK    |  <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>5G BAND 1-3</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>105.31</td> <td>68.30</td> <td>37.01</td> <td>97.40</td> <td>34.27</td> <td>10.64</td> <td>37.00</td> <td>0.00</td> <td>362</td> <td>229</td> <td>PEAK</td> </tr> </tbody> </table>          | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB |  |  |  |  |  |  | cm | deg | 1 | 5180.00 | 105.31 | 68.30 | 37.01 | 97.40 | 34.27 | 10.64 | 37.00 | 0.00 | 362 | 229 | PEAK    |
|       | Limit   | Read        | Ant    | Cable  | Preamp | Aux    | APos   | TPos  |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Freq  | Level   | Line        | Margin | Level  | Factor | Loss   | Factor |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| MHz   | dBuV/m  | dBuV/m      | dB     | dBuV   | dB/m   | dB     | dB     |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
|       |   |             |        |        |        | cm     | deg    |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| 1     | 5147.50   | 49.76       | 74.00  | -24.24 | 41.98  | 34.22  | 10.61  | 37.05 | 0.00 | 362  | 229   | PEAK    |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Limit | Read  | Ant         | Cable  | Preamp | Aux    | APos   | TPos   |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Freq  | Level   | Line        | Margin | Level  | Factor | Loss   | Factor |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| MHz   | dBuV/m  | dBuV/m      | dB     | dBuV   | dB/m   | dB     | dB     |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
|       |   |             |        |        |        | cm     | deg    |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| 1     | 5180.00   | 105.31      | 68.30  | 37.01  | 97.40  | 34.27  | 10.64  | 37.00 | 0.00 | 362  | 229   | PEAK    |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Avg   |  <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>5G BAND 1-3 (AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5142.40</td> <td>38.16</td> <td>54.00</td> <td>-15.84</td> <td>30.40</td> <td>34.22</td> <td>10.60</td> <td>37.06</td> <td>0.00</td> <td>362</td> <td>229</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit       | Read   | Ant    | Cable  | Preamp | Aux    | APos  | TPos | Freq | Level | Line    | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB |  |  |  |  |  |  | cm | deg | 1 | 5142.40 | 38.16 | 54.00 | -15.84 | 30.40 | 34.22 | 10.60 | 37.06 | 0.00 | 362 | 229 | AVERAGE |  <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>5G BAND 1-3 (AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>97.59</td> <td>68.30</td> <td>29.29</td> <td>89.71</td> <td>34.26</td> <td>10.63</td> <td>37.01</td> <td>0.00</td> <td>362</td> <td>229</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB |  |  |  |  |  |  | cm | deg | 1 | 5180.00 | 97.59  | 68.30 | 29.29 | 89.71 | 34.26 | 10.63 | 37.01 | 0.00 | 362 | 229 | AVERAGE |
| Limit | Read  | Ant         | Cable  | Preamp | Aux    | APos   | TPos   |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Freq  | Level   | Line        | Margin | Level  | Factor | Loss   | Factor |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| MHz   | dBuV/m  | dBuV/m      | dB     | dBuV   | dB/m   | dB     | dB     |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
|       |   |             |        |        |        | cm     | deg    |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| 1     | 5142.40   | 38.16       | 54.00  | -15.84 | 30.40  | 34.22  | 10.60  | 37.06 | 0.00 | 362  | 229   | AVERAGE |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Limit | Read  | Ant         | Cable  | Preamp | Aux    | APos   | TPos   |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Freq  | Level   | Line        | Margin | Level  | Factor | Loss   | Factor |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| MHz   | dBuV/m  | dBuV/m      | dB     | dBuV   | dB/m   | dB     | dB     |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
|       |   |             |        |        |        | cm     | deg    |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |
| 1     | 5180.00   | 97.59       | 68.30  | 29.29  | 89.71  | 34.26  | 10.63  | 37.01 | 0.00 | 362  | 229   | AVERAGE |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |  |  |  |  |  |  |    |     |   |         |        |       |       |       |       |       |       |      |     |     |         |

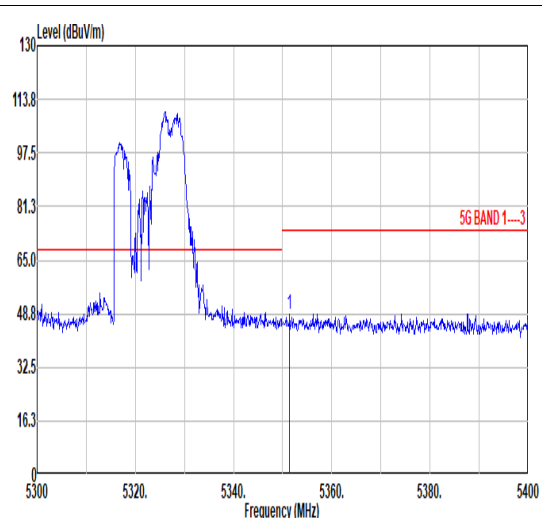
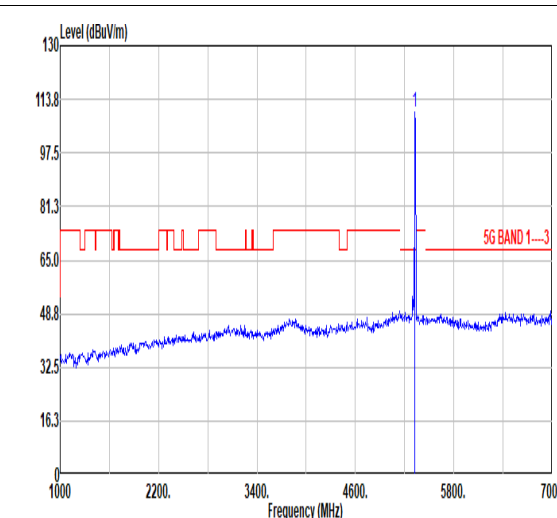
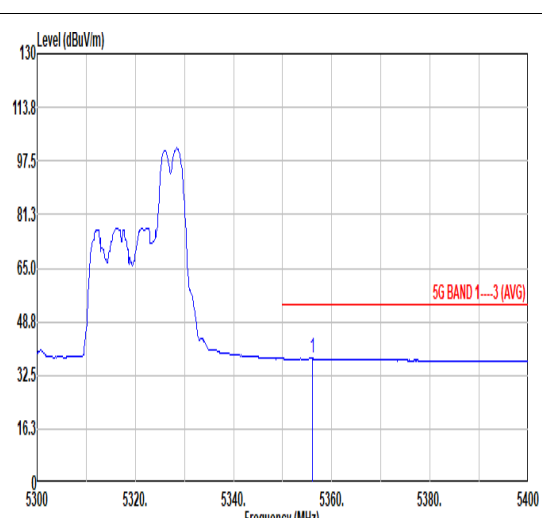
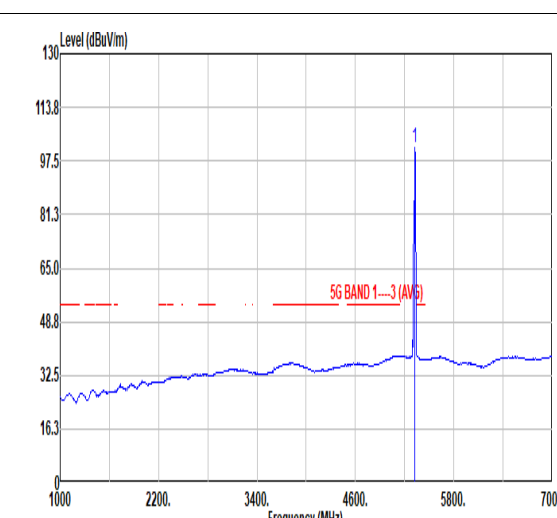


|       |   | 24          |        |        |        |        |        |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
|-------|---|-------------|--------|--------|--------|--------|--------|-------|------|------|-------|---------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|----|---------|--|-------|------|-----|-------|--------|-----|------|------|------|-------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|---|---------|--------|-------|-------|--------|-------|-------|-------|------|-----|----|---------|
| Mode  | Band Edge   |             |        |        |        |        |        |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
|       | U-NII-2C_5.25-5.35_802.11ax HE20_CH64_RU52/40_5320MHz   |             |        |        |        |        |        |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| ANT   | CDD 4+5   |             |        |        |        |        |        |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Pol.  | Horizontal  | Fundamental |        |        |        |        |        |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Peak  |  <p>Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a signal between 5300 and 5400 MHz. A red limit line for '5G BAND 1---3' is at approximately 74 dBuV/m. A peak is observed at 5351.40 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5351.40</td> <td>48.79</td> <td>74.00</td> <td>-25.21</td> <td>40.19</td> <td>34.52</td> <td>10.75</td> <td>36.67</td> <td>0.00</td> <td>125</td> <td>65</td> <td>PEAK</td> </tr> </tbody> </table>                                  | Limit       | Read   | Ant    | Cable  | Preamp | Aux    | APos  | TPos | Freq | Level | Line    | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 5351.40 | 48.79 | 74.00 | -25.21 | 40.19 | 34.52 | 10.75 | 36.67 | 0.00 | 125 | 65 | PEAK    |  <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. The plot shows a signal between 1000 and 7000 MHz. A red limit line for '5G BAND 1---3' is at approximately 74 dBuV/m. A peak is observed at 5320.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>110.11</td> <td>-----</td> <td>-----</td> <td>101.61</td> <td>34.49</td> <td>10.73</td> <td>36.72</td> <td>0.00</td> <td>125</td> <td>65</td> <td>PEAK</td> </tr> </tbody> </table>                                  | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 5320.00 | 110.11 | ----- | ----- | 101.61 | 34.49 | 10.73 | 36.72 | 0.00 | 125 | 65 | PEAK    |
|       | Limit   | Read        | Ant    | Cable  | Preamp | Aux    | APos   | TPos  |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Freq  | Level   | Line        | Margin | Level  | Factor | Loss   | Factor |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| MHz   | dBuV/m  | dBuV/m      | dB     | dBuV   | dB/m   | dB     | dB     |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| 1     | 5351.40   | 48.79       | 74.00  | -25.21 | 40.19  | 34.52  | 10.75  | 36.67 | 0.00 | 125  | 65    | PEAK    |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Limit | Read  | Ant         | Cable  | Preamp | Aux    | APos   | TPos   |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Freq  | Level   | Line        | Margin | Level  | Factor | Loss   | Factor |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| MHz   | dBuV/m  | dBuV/m      | dB     | dBuV   | dB/m   | dB     | dB     |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| 1     | 5320.00   | 110.11      | -----  | -----  | 101.61 | 34.49  | 10.73  | 36.72 | 0.00 | 125  | 65    | PEAK    |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Avg   |  <p>Level (dBuV/m) vs Frequency (MHz) for Average Horizontal polarization. The plot shows a signal between 5300 and 5400 MHz. A red limit line for '5G BAND 1---3 (AVG)' is at approximately 54 dBuV/m. The average level is 37.64 dBuV/m at 5356.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5356.00</td> <td>37.64</td> <td>54.00</td> <td>-16.36</td> <td>29.02</td> <td>34.53</td> <td>10.75</td> <td>36.66</td> <td>0.00</td> <td>125</td> <td>65</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit       | Read   | Ant    | Cable  | Preamp | Aux    | APos  | TPos | Freq | Level | Line    | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 5356.00 | 37.64 | 54.00 | -16.36 | 29.02 | 34.53 | 10.75 | 36.66 | 0.00 | 125 | 65 | AVERAGE |  <p>Level (dBuV/m) vs Frequency (MHz) for Average Fundamental polarization. The plot shows a signal between 1000 and 7000 MHz. A red limit line for '5G BAND 1---3 (AVG)' is at approximately 54 dBuV/m. The average level is 101.56 dBuV/m at 5320.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>101.56</td> <td>-----</td> <td>-----</td> <td>93.06</td> <td>34.49</td> <td>10.73</td> <td>36.72</td> <td>0.00</td> <td>125</td> <td>65</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 5320.00 | 101.56 | ----- | ----- | 93.06  | 34.49 | 10.73 | 36.72 | 0.00 | 125 | 65 | AVERAGE |
| Limit | Read  | Ant         | Cable  | Preamp | Aux    | APos   | TPos   |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Freq  | Level   | Line        | Margin | Level  | Factor | Loss   | Factor |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| MHz   | dBuV/m  | dBuV/m      | dB     | dBuV   | dB/m   | dB     | dB     |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| 1     | 5356.00   | 37.64       | 54.00  | -16.36 | 29.02  | 34.53  | 10.75  | 36.66 | 0.00 | 125  | 65    | AVERAGE |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Limit | Read  | Ant         | Cable  | Preamp | Aux    | APos   | TPos   |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| Freq  | Level   | Line        | Margin | Level  | Factor | Loss   | Factor |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| MHz   | dBuV/m  | dBuV/m      | dB     | dBuV   | dB/m   | dB     | dB     |       |      |      |       |         |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |
| 1     | 5320.00   | 101.56      | -----  | -----  | 93.06  | 34.49  | 10.73  | 36.72 | 0.00 | 125  | 65    | AVERAGE |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |    |         |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |         |

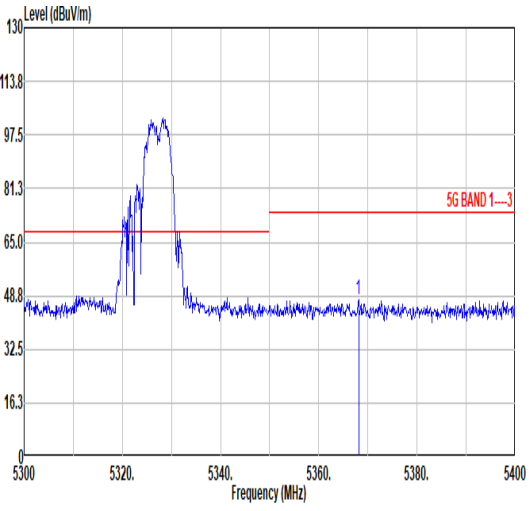
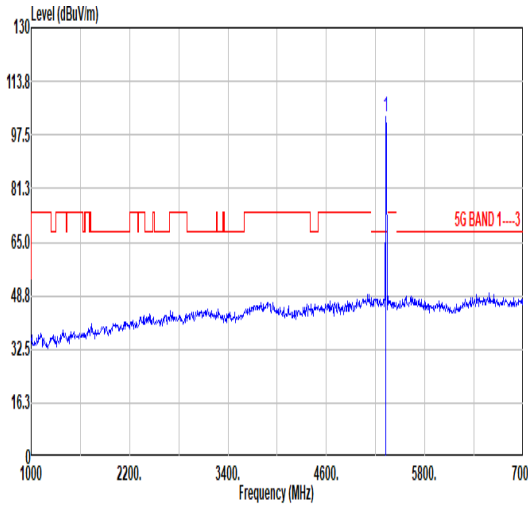
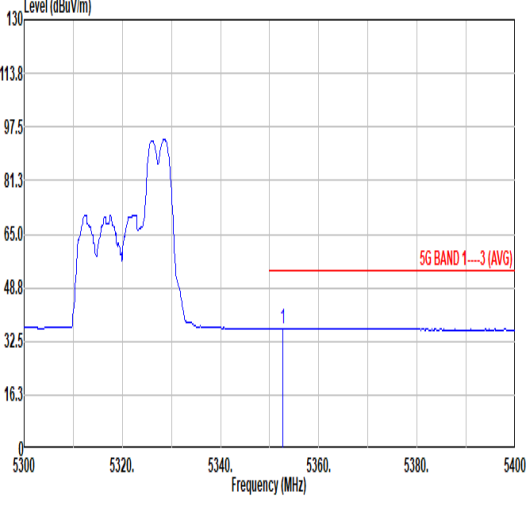
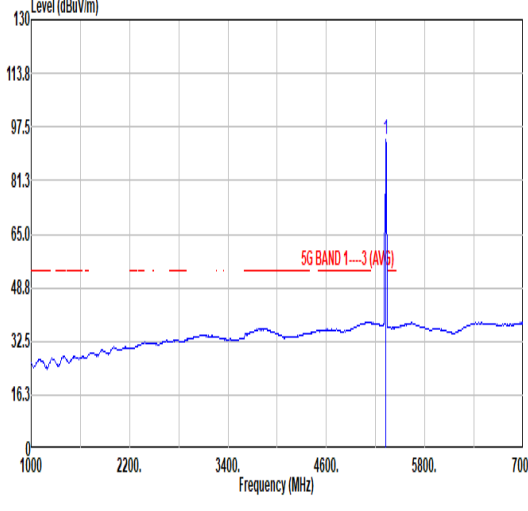


| Mode  | 24  |             |       |        |        |        |        |       |      |      |       |         |       |        |      |        |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |      |       |        |      |        |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
|-------|---|-------------|-------|--------|--------|--------|--------|-------|------|------|-------|---------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|---|-------|------|-----|-------|--------|-----|------|------|------|-------|------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|---------|
|       | Band Edge   |             |       |        |        |        |        |       |      |      |       |         |       |        |      |        |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |      |       |        |      |        |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
|       | U-NII-2C_5.25-5.35_802.11ax HE20_CH64_RU52/40_5320MHz   |             |       |        |        |        |        |       |      |      |       |         |       |        |      |        |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |      |       |        |      |        |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| ANT   | CDD 4+5   |             |       |        |        |        |        |       |      |      |       |         |       |        |      |        |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |      |       |        |      |        |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Pol.  | Vertical  | Fundamental |       |        |        |        |        |       |      |      |       |         |       |        |      |        |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |      |       |        |      |        |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Peak  |  <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5368.10</td> <td>47.40</td> <td>74.00</td> <td>-26.60</td> <td>38.73</td> <td>34.55</td> <td>10.76</td> <td>36.64</td> <td>0.00</td> <td>300</td> <td>122</td> <td>PEAK</td> </tr> </tbody> </table>     | Limit       | Read  | Ant    | Cable  | Preamp | Aux    | APos  | TPos | Freq | Level | Line    | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 5368.10 | 47.40 | 74.00 | -26.60 | 38.73 | 34.55 | 10.76 | 36.64 | 0.00 | 300 | 122 | PEAK    |  <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>102.87</td> <td>-----</td> <td>-----</td> <td>94.37</td> <td>34.49</td> <td>10.73</td> <td>36.72</td> <td>0.00</td> <td>300</td> <td>122</td> <td>PEAK</td> </tr> </tbody> </table>    | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 5320.00 | 102.87 | ----- | ----- | 94.37 | 34.49 | 10.73 | 36.72 | 0.00 | 300 | 122 | PEAK    |
|       | Limit   | Read        | Ant   | Cable  | Preamp | Aux    | APos   | TPos  |      |      |       |         |       |        |      |        |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |      |       |        |      |        |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Freq  | Level   | Line        | Level | Factor | Loss   | Factor | Factor |       |      |      |       |         |       |        |      |        |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |      |       |        |      |        |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| MHz   | dBuV/m  | dBuV/m      | dB    | dBuV   | dB/m   | dB     | dB     |       |      |      |       |         |       |        |      |        |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |      |       |        |      |        |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| 1     | 5368.10   | 47.40       | 74.00 | -26.60 | 38.73  | 34.55  | 10.76  | 36.64 | 0.00 | 300  | 122   | PEAK    |       |        |      |        |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |      |       |        |      |        |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Limit | Read  | Ant         | Cable | Preamp | Aux    | APos   | TPos   |       |      |      |       |         |       |        |      |        |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |      |       |        |      |        |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Freq  | Level   | Line        | Level | Factor | Loss   | Factor | Factor |       |      |      |       |         |       |        |      |        |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |      |       |        |      |        |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| MHz   | dBuV/m  | dBuV/m      | dB    | dBuV   | dB/m   | dB     | dB     |       |      |      |       |         |       |        |      |        |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |      |       |        |      |        |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| 1     | 5320.00   | 102.87      | ----- | -----  | 94.37  | 34.49  | 10.73  | 36.72 | 0.00 | 300  | 122   | PEAK    |       |        |      |        |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |      |       |        |      |        |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Avg   |  <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5352.70</td> <td>36.35</td> <td>54.00</td> <td>-17.65</td> <td>27.74</td> <td>34.53</td> <td>10.75</td> <td>36.67</td> <td>0.00</td> <td>300</td> <td>122</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit       | Read  | Ant    | Cable  | Preamp | Aux    | APos  | TPos | Freq | Level | Line    | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 5352.70 | 36.35 | 54.00 | -17.65 | 27.74 | 34.53 | 10.75 | 36.67 | 0.00 | 300 | 122 | AVERAGE |  <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>93.65</td> <td>-----</td> <td>-----</td> <td>85.15</td> <td>34.49</td> <td>10.73</td> <td>36.72</td> <td>0.00</td> <td>300</td> <td>122</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line | Level | Factor | Loss | Factor | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 5320.00 | 93.65  | ----- | ----- | 85.15 | 34.49 | 10.73 | 36.72 | 0.00 | 300 | 122 | AVERAGE |
| Limit | Read  | Ant         | Cable | Preamp | Aux    | APos   | TPos   |       |      |      |       |         |       |        |      |        |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |      |       |        |      |        |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Freq  | Level   | Line        | Level | Factor | Loss   | Factor | Factor |       |      |      |       |         |       |        |      |        |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |      |       |        |      |        |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| MHz   | dBuV/m  | dBuV/m      | dB    | dBuV   | dB/m   | dB     | dB     |       |      |      |       |         |       |        |      |        |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |      |       |        |      |        |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| 1     | 5352.70   | 36.35       | 54.00 | -17.65 | 27.74  | 34.53  | 10.75  | 36.67 | 0.00 | 300  | 122   | AVERAGE |       |        |      |        |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |      |       |        |      |        |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Limit | Read  | Ant         | Cable | Preamp | Aux    | APos   | TPos   |       |      |      |       |         |       |        |      |        |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |      |       |        |      |        |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| Freq  | Level   | Line        | Level | Factor | Loss   | Factor | Factor |       |      |      |       |         |       |        |      |        |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |      |       |        |      |        |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| MHz   | dBuV/m  | dBuV/m      | dB    | dBuV   | dB/m   | dB     | dB     |       |      |      |       |         |       |        |      |        |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |      |       |        |      |        |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |
| 1     | 5320.00   | 93.65       | ----- | -----  | 85.15  | 34.49  | 10.73  | 36.72 | 0.00 | 300  | 122   | AVERAGE |       |        |      |        |        |     |        |        |    |      |      |    |    |   |         |       |       |        |       |       |       |       |      |     |     |         |   |       |      |     |       |        |     |      |      |      |       |      |       |        |      |        |        |     |        |        |    |      |      |    |    |   |         |        |       |       |       |       |       |       |      |     |     |         |

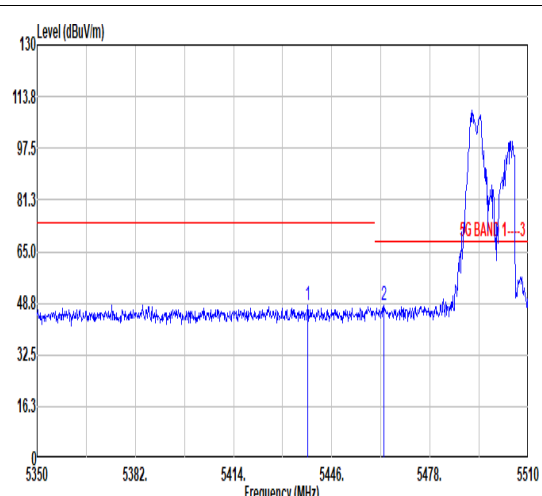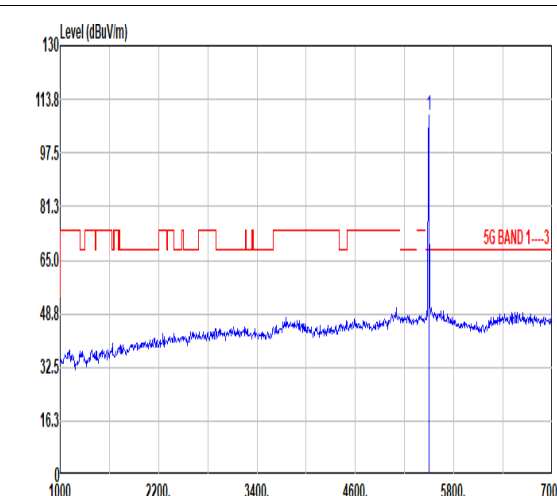
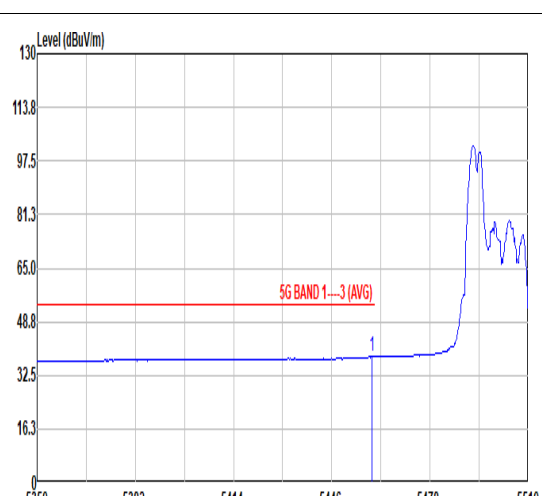
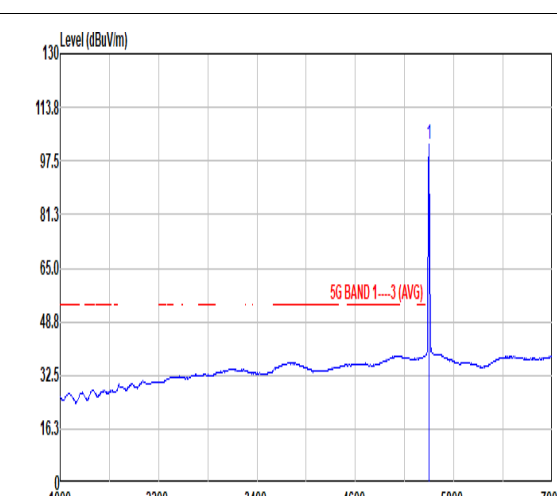


| Mode  | 25  |             |              |             |             |        |       |        |        |        |      |         |             |              |             |             |        |  |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |  |         |       |       |        |        |       |       |       |        |      |       |             |  |             |             |        |       |        |     |        |        |        |      |       |             |              |             |             |        |         |        |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |       |       |       |       |      |     |    |      |
|-------|---|-------------|--------------|-------------|-------------|--------|-------|--------|--------|--------|------|---------|-------------|--------------|-------------|-------------|--------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|----|---------|--|---------|-------|-------|--------|--------|-------|-------|-------|--------|------|-------|-------------|--|-------------|-------------|--------|-------|--------|-----|--------|--------|--------|------|-------|-------------|--------------|-------------|-------------|--------|---------|--------|-------|--------|--------|-------|-------|-------|------|-----|----|---------|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|----|------|
|       | Band Edge   |             |              |             |             |        |       |        |        |        |      |         |             |              |             |             |        |  |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |  |         |       |       |        |        |       |       |       |        |      |       |             |  |             |             |        |       |        |     |        |        |        |      |       |             |              |             |             |        |         |        |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |       |       |       |       |      |     |    |      |
|       | U-NII-2C_5.47-5.725_802.11ax HE20_CH100_RU52/37_5500MHz   |             |              |             |             |        |       |        |        |        |      |         |             |              |             |             |        |  |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |  |         |       |       |        |        |       |       |       |        |      |       |             |  |             |             |        |       |        |     |        |        |        |      |       |             |              |             |             |        |         |        |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |       |       |       |       |      |     |    |      |
| ANT   | CDD 4+5   |             |              |             |             |        |       |        |        |        |      |         |             |              |             |             |        |  |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |  |         |       |       |        |        |       |       |       |        |      |       |             |  |             |             |        |       |        |     |        |        |        |      |       |             |              |             |             |        |         |        |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |       |       |       |       |      |     |    |      |
| Pol.  | Horizontal  | Fundamental |              |             |             |        |       |        |        |        |      |         |             |              |             |             |        |  |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |  |         |       |       |        |        |       |       |       |        |      |       |             |  |             |             |        |       |        |     |        |        |        |      |       |             |              |             |             |        |         |        |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |       |       |       |       |      |     |    |      |
| Peak  |  <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5438.16</td> <td>48.23</td> <td>74.00</td> <td>-25.77</td> <td>39.33</td> <td>34.59</td> <td>10.81</td> <td>36.50</td> <td>0.00</td> <td>140</td> <td>62</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5462.96</td> <td>47.87</td> <td>68.30</td> <td>-20.43</td> <td>38.91</td> <td>34.58</td> <td>10.84</td> <td>36.46</td> <td>0.00</td> <td>140</td> <td>62</td> <td>PEAK</td> </tr> </tbody> </table> | Limit       | Read         | Ant         | Cable       | Preamp | Aux   | APos   | TPos   | Remark | Freq | Level   | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor |  |  | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5438.16 | 48.23 | 74.00 | -25.77 | 39.33 | 34.59 | 10.81 | 36.50 | 0.00 | 140 | 62 | PEAK    | 2  | 5462.96 | 47.87 | 68.30 | -20.43 | 38.91  | 34.58 | 10.84 | 36.46 | 0.00   | 140  | 62    | PEAK        |  <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>108.74</td> <td>-----</td> <td>-----</td> <td>99.70</td> <td>34.56</td> <td>10.88</td> <td>36.40</td> <td>0.00</td> <td>140</td> <td>62</td> <td>PEAK</td> </tr> </tbody> </table> | Limit       | Read        | Ant    | Cable | Preamp | Aux | APos   | TPos   | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor |         |        | MHz   | dBuV/m | dBuV/m | dB    | dBuV  | dB/m  | dB   | dB  | cm | deg     | 1 | 5500.00 | 108.74 | ----- | ----- | 99.70 | 34.56 | 10.88 | 36.40 | 0.00 | 140 | 62 | PEAK |
|       | Limit   | Read        | Ant          | Cable       | Preamp      | Aux    | APos  | TPos   | Remark |        |      |         |             |              |             |             |        |  |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |  |         |       |       |        |        |       |       |       |        |      |       |             |  |             |             |        |       |        |     |        |        |        |      |       |             |              |             |             |        |         |        |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |       |       |       |       |      |     |    |      |
| Freq  | Level   | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor |       |        |        |        |      |         |             |              |             |             |        |  |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |  |         |       |       |        |        |       |       |       |        |      |       |             |  |             |             |        |       |        |     |        |        |        |      |       |             |              |             |             |        |         |        |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |       |       |       |       |      |     |    |      |
| MHz   | dBuV/m  | dBuV/m      | dB           | dBuV        | dB/m        | dB     | dB    | cm     | deg    |        |      |         |             |              |             |             |        |  |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |  |         |       |       |        |        |       |       |       |        |      |       |             |  |             |             |        |       |        |     |        |        |        |      |       |             |              |             |             |        |         |        |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |       |       |       |       |      |     |    |      |
| 1     | 5438.16   | 48.23       | 74.00        | -25.77      | 39.33       | 34.59  | 10.81 | 36.50  | 0.00   | 140    | 62   | PEAK    |             |              |             |             |        |  |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |  |         |       |       |        |        |       |       |       |        |      |       |             |  |             |             |        |       |        |     |        |        |        |      |       |             |              |             |             |        |         |        |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |       |       |       |       |      |     |    |      |
| 2     | 5462.96   | 47.87       | 68.30        | -20.43      | 38.91       | 34.58  | 10.84 | 36.46  | 0.00   | 140    | 62   | PEAK    |             |              |             |             |        |  |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |  |         |       |       |        |        |       |       |       |        |      |       |             |  |             |             |        |       |        |     |        |        |        |      |       |             |              |             |             |        |         |        |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |       |       |       |       |      |     |    |      |
| Limit | Read  | Ant         | Cable        | Preamp      | Aux         | APos   | TPos  | Remark |        |        |      |         |             |              |             |             |        |  |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |  |         |       |       |        |        |       |       |       |        |      |       |             |  |             |             |        |       |        |     |        |        |        |      |       |             |              |             |             |        |         |        |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |       |       |       |       |      |     |    |      |
| Freq  | Level   | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor |       |        |        |        |      |         |             |              |             |             |        |  |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |  |         |       |       |        |        |       |       |       |        |      |       |             |  |             |             |        |       |        |     |        |        |        |      |       |             |              |             |             |        |         |        |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |       |       |       |       |      |     |    |      |
| MHz   | dBuV/m  | dBuV/m      | dB           | dBuV        | dB/m        | dB     | dB    | cm     | deg    |        |      |         |             |              |             |             |        |  |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |  |         |       |       |        |        |       |       |       |        |      |       |             |  |             |             |        |       |        |     |        |        |        |      |       |             |              |             |             |        |         |        |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |       |       |       |       |      |     |    |      |
| 1     | 5500.00   | 108.74      | -----        | -----       | 99.70       | 34.56  | 10.88 | 36.40  | 0.00   | 140    | 62   | PEAK    |             |              |             |             |        |  |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |  |         |       |       |        |        |       |       |       |        |      |       |             |  |             |             |        |       |        |     |        |        |        |      |       |             |              |             |             |        |         |        |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |       |       |       |       |      |     |    |      |
| Avg   |  <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.12</td> <td>38.16</td> <td>54.00</td> <td>-15.84</td> <td>29.20</td> <td>34.58</td> <td>10.84</td> <td>36.46</td> <td>0.00</td> <td>140</td> <td>62</td> <td>AVERAGE</td> </tr> </tbody> </table>   | Limit       | Read         | Ant         | Cable       | Preamp | Aux   | APos   | TPos   | Remark | Freq | Level   | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor |  |  | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5459.12 | 38.16 | 54.00 | -15.84 | 29.20 | 34.58 | 10.84 | 36.46 | 0.00 | 140 | 62 | AVERAGE |  <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>102.29</td> <td>-----</td> <td>-----</td> <td>93.25</td> <td>34.56</td> <td>10.88</td> <td>36.40</td> <td>0.00</td> <td>140</td> <td>62</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit   | Read  | Ant   | Cable  | Preamp | Aux   | APos  | TPos  | Remark | Freq | Level | Line Margin | Level Factor   | Loss Factor | Loss Factor | Factor |       |        | MHz | dBuV/m | dBuV/m | dB     | dBuV | dB/m  | dB          | dB           | cm          | deg         | 1      | 5500.00 | 102.29 | ----- | -----  | 93.25  | 34.56 | 10.88 | 36.40 | 0.00 | 140 | 62 | AVERAGE |   |         |        |       |       |       |       |       |       |      |     |    |      |
|       | Limit   | Read        | Ant          | Cable       | Preamp      | Aux    | APos  | TPos   | Remark |        |      |         |             |              |             |             |        |  |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |  |         |       |       |        |        |       |       |       |        |      |       |             |  |             |             |        |       |        |     |        |        |        |      |       |             |              |             |             |        |         |        |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |       |       |       |       |      |     |    |      |
| Freq  | Level   | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor |       |        |        |        |      |         |             |              |             |             |        |  |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |  |         |       |       |        |        |       |       |       |        |      |       |             |  |             |             |        |       |        |     |        |        |        |      |       |             |              |             |             |        |         |        |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |       |       |       |       |      |     |    |      |
| MHz   | dBuV/m  | dBuV/m      | dB           | dBuV        | dB/m        | dB     | dB    | cm     | deg    |        |      |         |             |              |             |             |        |  |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |  |         |       |       |        |        |       |       |       |        |      |       |             |  |             |             |        |       |        |     |        |        |        |      |       |             |              |             |             |        |         |        |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |       |       |       |       |      |     |    |      |
| 1     | 5459.12   | 38.16       | 54.00        | -15.84      | 29.20       | 34.58  | 10.84 | 36.46  | 0.00   | 140    | 62   | AVERAGE |             |              |             |             |        |  |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |  |         |       |       |        |        |       |       |       |        |      |       |             |  |             |             |        |       |        |     |        |        |        |      |       |             |              |             |             |        |         |        |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |       |       |       |       |      |     |    |      |
| Limit | Read  | Ant         | Cable        | Preamp      | Aux         | APos   | TPos  | Remark |        |        |      |         |             |              |             |             |        |  |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |  |         |       |       |        |        |       |       |       |        |      |       |             |  |             |             |        |       |        |     |        |        |        |      |       |             |              |             |             |        |         |        |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |       |       |       |       |      |     |    |      |
| Freq  | Level   | Line Margin | Level Factor | Loss Factor | Loss Factor | Factor |       |        |        |        |      |         |             |              |             |             |        |  |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |  |         |       |       |        |        |       |       |       |        |      |       |             |  |             |             |        |       |        |     |        |        |        |      |       |             |              |             |             |        |         |        |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |       |       |       |       |      |     |    |      |
| MHz   | dBuV/m  | dBuV/m      | dB           | dBuV        | dB/m        | dB     | dB    | cm     | deg    |        |      |         |             |              |             |             |        |  |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |  |         |       |       |        |        |       |       |       |        |      |       |             |  |             |             |        |       |        |     |        |        |        |      |       |             |              |             |             |        |         |        |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |       |       |       |       |      |     |    |      |
| 1     | 5500.00   | 102.29      | -----        | -----       | 93.25       | 34.56  | 10.88 | 36.40  | 0.00   | 140    | 62   | AVERAGE |             |              |             |             |        |  |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |    |         |  |         |       |       |        |        |       |       |       |        |      |       |             |  |             |             |        |       |        |     |        |        |        |      |       |             |              |             |             |        |         |        |       |        |        |       |       |       |      |     |    |         |   |         |        |       |       |       |       |       |       |      |     |    |      |

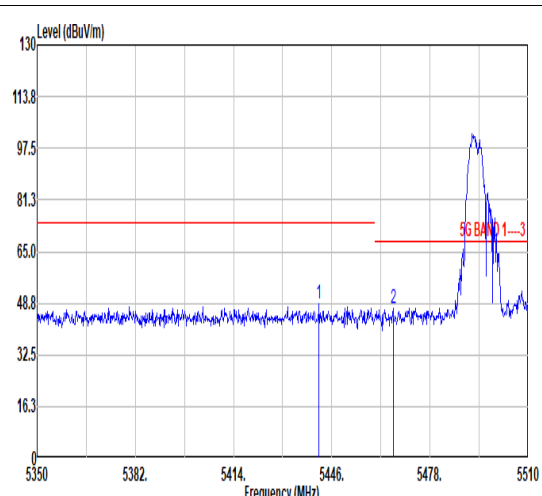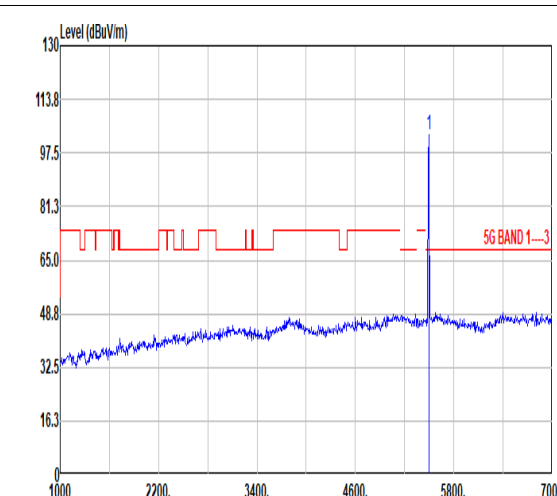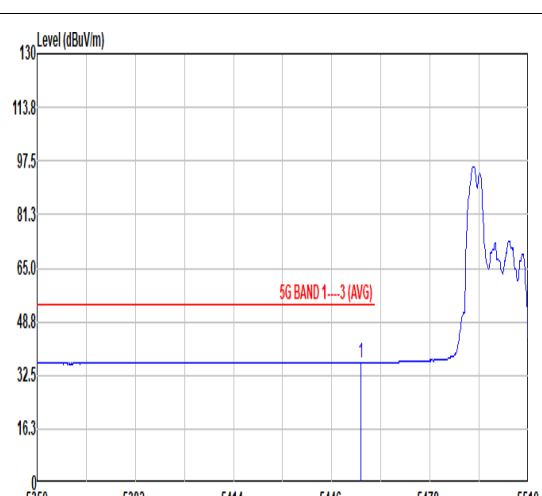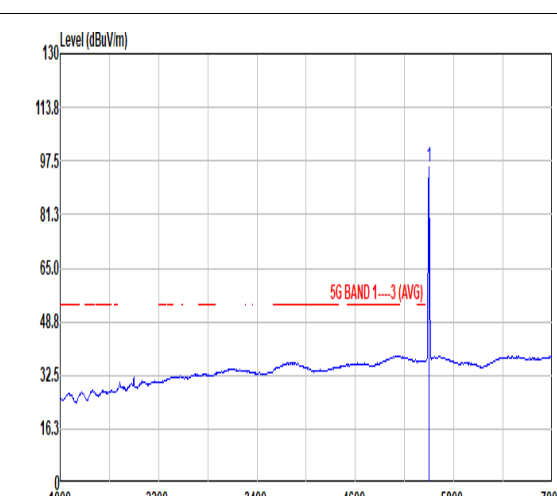

|       |   | 25  |              |             |        |        |             |        |        |        |     |         |       |             |              |             |        |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |  |         |       |       |        |        |       |       |       |        |     |      |       |   |              |             |        |        |        |     |      |      |        |        |      |       |             |              |             |        |        |        |    |         |       |        |        |       |       |       |       |      |     |     |         |   |         |        |       |       |       |       |       |       |      |     |     |      |
|-------|---|---|--------------|-------------|--------|--------|-------------|--------|--------|--------|-----|---------|-------|-------------|--------------|-------------|--------|--------|--------|----|-----|-----|--------|--------|----|------|------|----|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|-----|---------|--|---------|-------|-------|--------|--------|-------|-------|-------|--------|-----|------|-------|---|--------------|-------------|--------|--------|--------|-----|------|------|--------|--------|------|-------|-------------|--------------|-------------|--------|--------|--------|----|---------|-------|--------|--------|-------|-------|-------|-------|------|-----|-----|---------|---|---------|--------|-------|-------|-------|-------|-------|-------|------|-----|-----|------|
| Mode  |   | Band Edge   |              |             |        |        |             |        |        |        |     |         |       |             |              |             |        |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |  |         |       |       |        |        |       |       |       |        |     |      |       |   |              |             |        |        |        |     |      |      |        |        |      |       |             |              |             |        |        |        |    |         |       |        |        |       |       |       |       |      |     |     |         |   |         |        |       |       |       |       |       |       |      |     |     |      |
|       |   | U-NII-2C_5.47-5.725_802.11ax HE20_CH100_RU52/37_5500MHz |              |             |        |        |             |        |        |        |     |         |       |             |              |             |        |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |  |         |       |       |        |        |       |       |       |        |     |      |       |   |              |             |        |        |        |     |      |      |        |        |      |       |             |              |             |        |        |        |    |         |       |        |        |       |       |       |       |      |     |     |         |   |         |        |       |       |       |       |       |       |      |     |     |      |
| ANT   |   | CDD 4+5   |              |             |        |        |             |        |        |        |     |         |       |             |              |             |        |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |  |         |       |       |        |        |       |       |       |        |     |      |       |   |              |             |        |        |        |     |      |      |        |        |      |       |             |              |             |        |        |        |    |         |       |        |        |       |       |       |       |      |     |     |         |   |         |        |       |       |       |       |       |       |      |     |     |      |
| Pol.  |   | Vertical  |              |             |        |        | Fundamental |        |        |        |     |         |       |             |              |             |        |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |  |         |       |       |        |        |       |       |       |        |     |      |       |   |              |             |        |        |        |     |      |      |        |        |      |       |             |              |             |        |        |        |    |         |       |        |        |       |       |       |       |      |     |     |         |   |         |        |       |       |       |       |       |       |      |     |     |      |
| Peak  |  <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>5G BAND 1-3</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5441.84</td> <td>48.33</td> <td>74.00</td> <td>-25.67</td> <td>39.43</td> <td>34.58</td> <td>10.82</td> <td>36.50</td> <td>0.00</td> <td>333</td> <td>125</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5466.00</td> <td>47.29</td> <td>68.30</td> <td>-21.01</td> <td>38.31</td> <td>34.58</td> <td>10.85</td> <td>36.45</td> <td>0.00</td> <td>333</td> <td>125</td> <td>PEAK</td> </tr> </tbody> </table> | Limit   | Read         | Ant         | Cable  | Preamp | Aux         | APos   | TPos   | Remark |     | Freq    | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor | cm | deg | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | 1 | 5441.84 | 48.33 | 74.00 | -25.67 | 39.43 | 34.58 | 10.82 | 36.50 | 0.00 | 333 | 125 | PEAK    | 2  | 5466.00 | 47.29 | 68.30 | -21.01 | 38.31  | 34.58 | 10.85 | 36.45 | 0.00   | 333 | 125  | PEAK  |  <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>5G BAND 1-3</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>103.20</td> <td>-----</td> <td>-----</td> <td>94.16</td> <td>34.56</td> <td>10.88</td> <td>36.40</td> <td>0.00</td> <td>333</td> <td>125</td> <td>PEAK</td> </tr> </tbody> </table> | Limit        | Read        | Ant    | Cable  | Preamp | Aux | APos | TPos | Remark |        | Freq | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor | cm | deg     | MHz   | dBuV/m | dBuV/m | dB    | dBuV  | dB/m  | dB    | dB   | dB  | cm  | deg     | 1 | 5500.00 | 103.20 | ----- | ----- | 94.16 | 34.56 | 10.88 | 36.40 | 0.00 | 333 | 125 | PEAK |
|       | Limit   | Read  | Ant          | Cable       | Preamp | Aux    | APos        | TPos   | Remark |        |     |         |       |             |              |             |        |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |  |         |       |       |        |        |       |       |       |        |     |      |       |   |              |             |        |        |        |     |      |      |        |        |      |       |             |              |             |        |        |        |    |         |       |        |        |       |       |       |       |      |     |     |         |   |         |        |       |       |       |       |       |       |      |     |     |      |
| Freq  | Level   | Line Margin   | Level Factor | Loss Factor | Factor | Factor | Factor      | cm     | deg    |        |     |         |       |             |              |             |        |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |  |         |       |       |        |        |       |       |       |        |     |      |       |   |              |             |        |        |        |     |      |      |        |        |      |       |             |              |             |        |        |        |    |         |       |        |        |       |       |       |       |      |     |     |         |   |         |        |       |       |       |       |       |       |      |     |     |      |
| MHz   | dBuV/m  | dBuV/m  | dB           | dBuV        | dB/m   | dB     | dB          | dB     | cm     | deg    |     |         |       |             |              |             |        |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |  |         |       |       |        |        |       |       |       |        |     |      |       |   |              |             |        |        |        |     |      |      |        |        |      |       |             |              |             |        |        |        |    |         |       |        |        |       |       |       |       |      |     |     |         |   |         |        |       |       |       |       |       |       |      |     |     |      |
| 1     | 5441.84   | 48.33   | 74.00        | -25.67      | 39.43  | 34.58  | 10.82       | 36.50  | 0.00   | 333    | 125 | PEAK    |       |             |              |             |        |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |  |         |       |       |        |        |       |       |       |        |     |      |       |   |              |             |        |        |        |     |      |      |        |        |      |       |             |              |             |        |        |        |    |         |       |        |        |       |       |       |       |      |     |     |         |   |         |        |       |       |       |       |       |       |      |     |     |      |
| 2     | 5466.00   | 47.29   | 68.30        | -21.01      | 38.31  | 34.58  | 10.85       | 36.45  | 0.00   | 333    | 125 | PEAK    |       |             |              |             |        |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |  |         |       |       |        |        |       |       |       |        |     |      |       |   |              |             |        |        |        |     |      |      |        |        |      |       |             |              |             |        |        |        |    |         |       |        |        |       |       |       |       |      |     |     |         |   |         |        |       |       |       |       |       |       |      |     |     |      |
| Limit | Read  | Ant   | Cable        | Preamp      | Aux    | APos   | TPos        | Remark |        |        |     |         |       |             |              |             |        |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |  |         |       |       |        |        |       |       |       |        |     |      |       |   |              |             |        |        |        |     |      |      |        |        |      |       |             |              |             |        |        |        |    |         |       |        |        |       |       |       |       |      |     |     |         |   |         |        |       |       |       |       |       |       |      |     |     |      |
| Freq  | Level   | Line Margin   | Level Factor | Loss Factor | Factor | Factor | Factor      | cm     | deg    |        |     |         |       |             |              |             |        |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |  |         |       |       |        |        |       |       |       |        |     |      |       |   |              |             |        |        |        |     |      |      |        |        |      |       |             |              |             |        |        |        |    |         |       |        |        |       |       |       |       |      |     |     |         |   |         |        |       |       |       |       |       |       |      |     |     |      |
| MHz   | dBuV/m  | dBuV/m  | dB           | dBuV        | dB/m   | dB     | dB          | dB     | cm     | deg    |     |         |       |             |              |             |        |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |  |         |       |       |        |        |       |       |       |        |     |      |       |   |              |             |        |        |        |     |      |      |        |        |      |       |             |              |             |        |        |        |    |         |       |        |        |       |       |       |       |      |     |     |         |   |         |        |       |       |       |       |       |       |      |     |     |      |
| 1     | 5500.00   | 103.20  | -----        | -----       | 94.16  | 34.56  | 10.88       | 36.40  | 0.00   | 333    | 125 | PEAK    |       |             |              |             |        |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |  |         |       |       |        |        |       |       |       |        |     |      |       |   |              |             |        |        |        |     |      |      |        |        |      |       |             |              |             |        |        |        |    |         |       |        |        |       |       |       |       |      |     |     |         |   |         |        |       |       |       |       |       |       |      |     |     |      |
| Avg   |  <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>5G BAND 1-3 (AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5455.44</td> <td>36.36</td> <td>54.00</td> <td>-17.64</td> <td>27.42</td> <td>34.58</td> <td>10.83</td> <td>36.47</td> <td>0.00</td> <td>333</td> <td>125</td> <td>AVERAGE</td> </tr> </tbody> </table>  | Limit   | Read         | Ant         | Cable  | Preamp | Aux         | APos   | TPos   | Remark |     | Freq    | Level | Line Margin | Level Factor | Loss Factor | Factor | Factor | Factor | cm | deg | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | 1 | 5455.44 | 36.36 | 54.00 | -17.64 | 27.42 | 34.58 | 10.83 | 36.47 | 0.00 | 333 | 125 | AVERAGE |  <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>5G BAND 1-3 (AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>95.90</td> <td>-----</td> <td>-----</td> <td>86.86</td> <td>34.56</td> <td>10.88</td> <td>36.40</td> <td>0.00</td> <td>333</td> <td>125</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit   | Read  | Ant   | Cable  | Preamp | Aux   | APos  | TPos  | Remark |     | Freq | Level | Line Margin   | Level Factor | Loss Factor | Factor | Factor | Factor | cm  | deg  | MHz  | dBuV/m | dBuV/m | dB   | dBuV  | dB/m        | dB           | dB          | dB     | cm     | deg    | 1  | 5500.00 | 95.90 | -----  | -----  | 86.86 | 34.56 | 10.88 | 36.40 | 0.00 | 333 | 125 | AVERAGE |   |         |        |       |       |       |       |       |       |      |     |     |      |
|       | Limit   | Read  | Ant          | Cable       | Preamp | Aux    | APos        | TPos   | Remark |        |     |         |       |             |              |             |        |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |  |         |       |       |        |        |       |       |       |        |     |      |       |   |              |             |        |        |        |     |      |      |        |        |      |       |             |              |             |        |        |        |    |         |       |        |        |       |       |       |       |      |     |     |         |   |         |        |       |       |       |       |       |       |      |     |     |      |
| Freq  | Level   | Line Margin   | Level Factor | Loss Factor | Factor | Factor | Factor      | cm     | deg    |        |     |         |       |             |              |             |        |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |  |         |       |       |        |        |       |       |       |        |     |      |       |   |              |             |        |        |        |     |      |      |        |        |      |       |             |              |             |        |        |        |    |         |       |        |        |       |       |       |       |      |     |     |         |   |         |        |       |       |       |       |       |       |      |     |     |      |
| MHz   | dBuV/m  | dBuV/m  | dB           | dBuV        | dB/m   | dB     | dB          | dB     | cm     | deg    |     |         |       |             |              |             |        |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |  |         |       |       |        |        |       |       |       |        |     |      |       |   |              |             |        |        |        |     |      |      |        |        |      |       |             |              |             |        |        |        |    |         |       |        |        |       |       |       |       |      |     |     |         |   |         |        |       |       |       |       |       |       |      |     |     |      |
| 1     | 5455.44   | 36.36   | 54.00        | -17.64      | 27.42  | 34.58  | 10.83       | 36.47  | 0.00   | 333    | 125 | AVERAGE |       |             |              |             |        |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |  |         |       |       |        |        |       |       |       |        |     |      |       |   |              |             |        |        |        |     |      |      |        |        |      |       |             |              |             |        |        |        |    |         |       |        |        |       |       |       |       |      |     |     |         |   |         |        |       |       |       |       |       |       |      |     |     |      |
| Limit | Read  | Ant   | Cable        | Preamp      | Aux    | APos   | TPos        | Remark |        |        |     |         |       |             |              |             |        |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |  |         |       |       |        |        |       |       |       |        |     |      |       |   |              |             |        |        |        |     |      |      |        |        |      |       |             |              |             |        |        |        |    |         |       |        |        |       |       |       |       |      |     |     |         |   |         |        |       |       |       |       |       |       |      |     |     |      |
| Freq  | Level   | Line Margin   | Level Factor | Loss Factor | Factor | Factor | Factor      | cm     | deg    |        |     |         |       |             |              |             |        |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |  |         |       |       |        |        |       |       |       |        |     |      |       |   |              |             |        |        |        |     |      |      |        |        |      |       |             |              |             |        |        |        |    |         |       |        |        |       |       |       |       |      |     |     |         |   |         |        |       |       |       |       |       |       |      |     |     |      |
| MHz   | dBuV/m  | dBuV/m  | dB           | dBuV        | dB/m   | dB     | dB          | dB     | cm     | deg    |     |         |       |             |              |             |        |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |  |         |       |       |        |        |       |       |       |        |     |      |       |   |              |             |        |        |        |     |      |      |        |        |      |       |             |              |             |        |        |        |    |         |       |        |        |       |       |       |       |      |     |     |         |   |         |        |       |       |       |       |       |       |      |     |     |      |
| 1     | 5500.00   | 95.90   | -----        | -----       | 86.86  | 34.56  | 10.88       | 36.40  | 0.00   | 333    | 125 | AVERAGE |       |             |              |             |        |        |        |    |     |     |        |        |    |      |      |    |    |    |    |     |   |         |       |       |        |       |       |       |       |      |     |     |         |  |         |       |       |        |        |       |       |       |        |     |      |       |   |              |             |        |        |        |     |      |      |        |        |      |       |             |              |             |        |        |        |    |         |       |        |        |       |       |       |       |      |     |     |         |   |         |        |       |       |       |       |       |       |      |     |     |      |

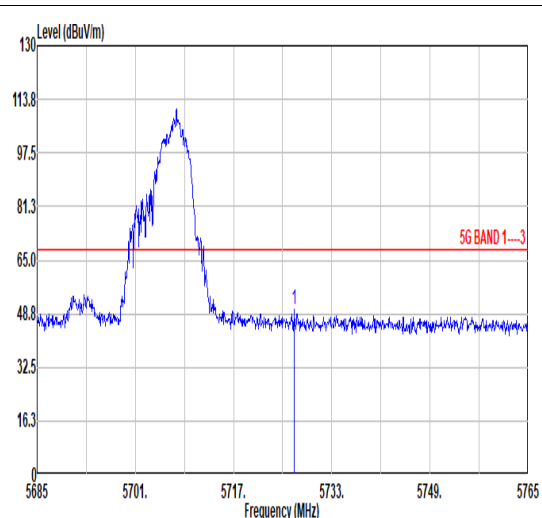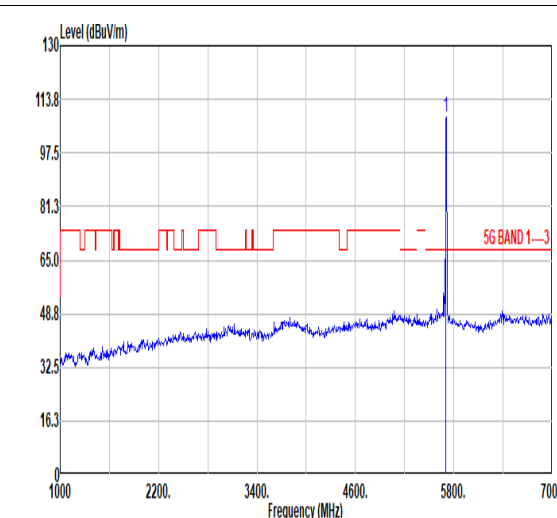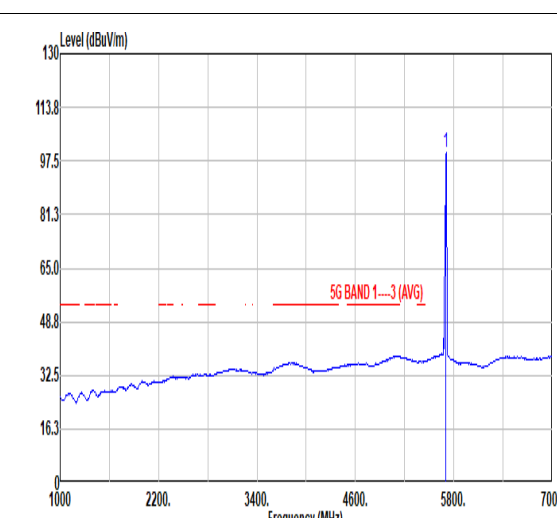

| Mode  | 26   |  |        |        |        |        |        |       |      |      |       |         |        |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |       |        |       |       |       |       |       |      |     |      |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |      |
|-------|--|--|--------|--------|--------|--------|--------|-------|------|------|-------|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|------|------|------|----|----|---------|---------|-------|--------|-------|-------|-------|-------|-------|------|-----|------|--|-------|------|-----|-------|--------|-----|------|------|------|-------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|---|---------|--------|-------|-------|--------|-------|-------|-------|------|-----|----|------|
|       | Band Edge  |  |        |        |        |        |        |       |      |      |       |         |        |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |       |        |       |       |       |       |       |      |     |      |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |      |
|       | U-NII-2C_5.47-5.725_802.11ax HE20_CH140_RU52/40_5700MHz  |  |        |        |        |        |        |       |      |      |       |         |        |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |       |        |       |       |       |       |       |      |     |      |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |      |
| ANT   | CDD 4+5  |  |        |        |        |        |        |       |      |      |       |         |        |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |       |        |       |       |       |       |       |      |     |      |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |      |
| Pol.  | Horizontal   | Fundamental  |        |        |        |        |        |       |      |      |       |         |        |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |       |        |       |       |       |       |       |      |     |      |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |      |
| Peak  |  <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5726.92</td> <td>50.28</td> <td>68.30</td> <td>-18.02</td> <td>42.07</td> <td>34.68</td> <td>11.18</td> <td>37.65</td> <td>0.00</td> <td>100</td> <td>80</td> <td>PEAK</td> </tr> </tbody> </table> | Limit  | Read   | Ant    | Cable  | Preamp | Aux    | APos  | TPos | Freq | Level | Line    | Margin | Level  | Factor | Loss   | Factor | MHz    | dBuV/m | dBuV/m | dB     | dBuV | dB/m | dB   | dB | 1  | 5726.92 | 50.28   | 68.30 | -18.02 | 42.07 | 34.68 | 11.18 | 37.65 | 0.00  | 100  | 80  | PEAK |  <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>108.51</td> <td>-----</td> <td>-----</td> <td>100.06</td> <td>34.64</td> <td>11.16</td> <td>37.35</td> <td>0.00</td> <td>100</td> <td>80</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 5700.00 | 108.51 | ----- | ----- | 100.06 | 34.64 | 11.16 | 37.35 | 0.00 | 100 | 80 | PEAK |
| Limit | Read   | Ant  | Cable  | Preamp | Aux    | APos   | TPos   |       |      |      |       |         |        |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |       |        |       |       |       |       |       |      |     |      |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |      |
| Freq  | Level  | Line   | Margin | Level  | Factor | Loss   | Factor |       |      |      |       |         |        |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |       |        |       |       |       |       |       |      |     |      |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |      |
| MHz   | dBuV/m   | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB     |       |      |      |       |         |        |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |       |        |       |       |       |       |       |      |     |      |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |      |
| 1     | 5726.92  | 50.28  | 68.30  | -18.02 | 42.07  | 34.68  | 11.18  | 37.65 | 0.00 | 100  | 80    | PEAK    |        |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |       |        |       |       |       |       |       |      |     |      |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |      |
| Limit | Read   | Ant  | Cable  | Preamp | Aux    | APos   | TPos   |       |      |      |       |         |        |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |       |        |       |       |       |       |       |      |     |      |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |      |
| Freq  | Level  | Line   | Margin | Level  | Factor | Loss   | Factor |       |      |      |       |         |        |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |       |        |       |       |       |       |       |      |     |      |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |      |
| MHz   | dBuV/m   | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB     |       |      |      |       |         |        |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |       |        |       |       |       |       |       |      |     |      |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |      |
| 1     | 5700.00  | 108.51   | -----  | -----  | 100.06 | 34.64  | 11.16  | 37.35 | 0.00 | 100  | 80    | PEAK    |        |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |       |        |       |       |       |       |       |      |     |      |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |      |
| Avg   | Blank  |  <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>99.88</td> <td>-----</td> <td>-----</td> <td>91.43</td> <td>34.64</td> <td>11.16</td> <td>37.35</td> <td>0.00</td> <td>100</td> <td>80</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit  | Read   | Ant    | Cable  | Preamp | Aux   | APos | TPos | Freq  | Level   | Line   | Margin | Level  | Factor | Loss   | Factor | MHz    | dBuV/m | dBuV/m | dB   | dBuV | dB/m | dB | dB | 1       | 5700.00 | 99.88 | -----  | ----- | 91.43 | 34.64 | 11.16 | 37.35 | 0.00 | 100 | 80   | AVERAGE  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |      |
| Limit | Read   | Ant  | Cable  | Preamp | Aux    | APos   | TPos   |       |      |      |       |         |        |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |       |        |       |       |       |       |       |      |     |      |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |      |
| Freq  | Level  | Line   | Margin | Level  | Factor | Loss   | Factor |       |      |      |       |         |        |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |       |        |       |       |       |       |       |      |     |      |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |      |
| MHz   | dBuV/m   | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB     |       |      |      |       |         |        |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |       |        |       |       |       |       |       |      |     |      |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |      |
| 1     | 5700.00  | 99.88  | -----  | -----  | 91.43  | 34.64  | 11.16  | 37.35 | 0.00 | 100  | 80    | AVERAGE |        |        |        |        |        |        |        |        |        |      |      |      |    |    |         |         |       |        |       |       |       |       |       |      |     |      |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |   |         |        |       |       |        |       |       |       |      |     |    |      |



| Mode      | 26   |  |        |        |        |        |             |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |          |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |
|-----------|--|--|--------|--------|--------|--------|-------------|------|------|------|-------|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|------|------|------|----|-----------|-----------|-------|--------|-------|-------|-------|-------|-------|--|--|--|--|--|------|------|-----|--|--|--|--|--|--|----------|--|-------|------|-----|-------|--------|-----|------|------|------|-------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|-----------|--------|-------|-------|-------|-------|-------|-------|--|--|--|--|--|--|------|-----|--|--|--|--|--|--|--|----------|
|           | Band Edge  |  |        |        |        |        |             |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |          |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |
|           | U-NII-2C_5.47-5.725_802.11ax HE20_CH140_RU52/40_5700MHz  |  |        |        |        |        |             |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |          |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |
| ANT       | CDD 4+5  |  |        |        |        |        |             |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |          |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |
| Pol.      | Vertical   | Fundamental  |        |        |        |        |             |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |          |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |
| Peak      | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5725.32</td> <td>48.65</td> <td>68.30</td> <td>-19.65</td> <td>40.41</td> <td>34.68</td> <td>11.18</td> <td>37.62</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>333</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>232 PEAK</td> </tr> </tbody> </table> | Limit  | Read   | Ant    | Cable  | Preamp | Aux         | APos | TPos | Freq | Level | Line  | Margin | Level  | Factor | Loss   | Factor | MHz    | dBuV/m | dBuV/m | dB     | dBuV | dB/m | dB   | dB | 1 5725.32 | 48.65     | 68.30 | -19.65 | 40.41 | 34.68 | 11.18 | 37.62 |       |  |  |  |  |  | 0.00 | 333  |     |  |  |  |  |  |  | 232 PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>105.71</td> <td>-----</td> <td>-----</td> <td>97.26</td> <td>34.64</td> <td>11.16</td> <td>37.35</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>333</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>232 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Aux | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 5700.00 | 105.71 | ----- | ----- | 97.26 | 34.64 | 11.16 | 37.35 |  |  |  |  |  |  | 0.00 | 333 |  |  |  |  |  |  |  | 232 PEAK |
| Limit     | Read   | Ant  | Cable  | Preamp | Aux    | APos   | TPos        |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |          |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |
| Freq      | Level  | Line   | Margin | Level  | Factor | Loss   | Factor      |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |          |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |
| MHz       | dBuV/m   | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB          |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |          |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |
| 1 5725.32 | 48.65  | 68.30  | -19.65 | 40.41  | 34.68  | 11.18  | 37.62       |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |          |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |
|           |  |  |        |        |        | 0.00   | 333         |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |          |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |
|           |  |  |        |        |        |        | 232 PEAK    |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |          |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |
| Limit     | Read   | Ant  | Cable  | Preamp | Aux    | APos   | TPos        |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |          |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |
| Freq      | Level  | Line   | Margin | Level  | Factor | Loss   | Factor      |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |          |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |
| MHz       | dBuV/m   | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB          |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |          |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |
| 1 5700.00 | 105.71   | -----  | -----  | 97.26  | 34.64  | 11.16  | 37.35       |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |          |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |
|           |  |  |        |        |        | 0.00   | 333         |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |          |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |
|           |  |  |        |        |        |        | 232 PEAK    |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |          |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |
| Avg       | Blank  | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>97.85</td> <td>-----</td> <td>-----</td> <td>89.40</td> <td>34.64</td> <td>11.16</td> <td>37.35</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>333</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>232 AVERAGE</td> </tr> </tbody> </table> | Limit  | Read   | Ant    | Cable  | Preamp      | Aux  | APos | TPos | Freq  | Level | Line   | Margin | Level  | Factor | Loss   | Factor | MHz    | dBuV/m | dBuV/m | dB   | dBuV | dB/m | dB | dB        | 1 5700.00 | 97.85 | -----  | ----- | 89.40 | 34.64 | 11.16 | 37.35 |  |  |  |  |  |      | 0.00 | 333 |  |  |  |  |  |  |          | 232 AVERAGE  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |
| Limit     | Read   | Ant  | Cable  | Preamp | Aux    | APos   | TPos        |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |          |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |
| Freq      | Level  | Line   | Margin | Level  | Factor | Loss   | Factor      |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |          |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |
| MHz       | dBuV/m   | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB          |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |          |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |
| 1 5700.00 | 97.85  | -----  | -----  | 89.40  | 34.64  | 11.16  | 37.35       |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |          |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |
|           |  |  |        |        |        | 0.00   | 333         |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |          |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |
|           |  |  |        |        |        |        | 232 AVERAGE |      |      |      |       |       |        |        |        |        |        |        |        |        |        |      |      |      |    |           |           |       |        |       |       |       |       |       |  |  |  |  |  |      |      |     |  |  |  |  |  |  |          |  |       |      |     |       |        |     |      |      |      |       |      |        |       |        |      |        |     |        |        |    |      |      |    |    |           |        |       |       |       |       |       |       |  |  |  |  |  |  |      |     |  |  |  |  |  |  |  |          |



| <b>27</b>   |   |        |        |        |        |        |        |        |        |        |       |         |        |        |        |        |        |        |        |        |        |        |      |      |      |    |    |     |     |         |         |       |       |        |       |       |       |       |      |     |         |         |
|---|---|--------|--------|--------|--------|--------|--------|--------|--------|--------|-------|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|------|------|------|----|----|-----|-----|---------|---------|-------|-------|--------|-------|-------|-------|-------|------|-----|---------|---------|
| <b>Mode</b>   | <b>Band Edge</b>  |        |        |        |        |        |        |        |        |        |       |         |        |        |        |        |        |        |        |        |        |        |      |      |      |    |    |     |     |         |         |       |       |        |       |       |       |       |      |     |         |         |
| <b>U-NII-1_5.15-5.25_802.11ax HE20_CH36_RU106/53_5180MHz</b>  |   |        |        |        |        |        |        |        |        |        |       |         |        |        |        |        |        |        |        |        |        |        |      |      |      |    |    |     |     |         |         |       |       |        |       |       |       |       |      |     |         |         |
| <b>ANT</b>  | <b>CDD 4+5</b>  |        |        |        |        |        |        |        |        |        |       |         |        |        |        |        |        |        |        |        |        |        |      |      |      |    |    |     |     |         |         |       |       |        |       |       |       |       |      |     |         |         |
| <b>Pol.</b>   | <b>Horizontal</b>   |        |        |        |        |        |        |        |        |        |       |         |        |        |        |        |        |        |        |        |        |        |      |      |      |    |    |     |     |         |         |       |       |        |       |       |       |       |      |     |         |         |
| <b>Peak</b>   | <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The plot shows a signal peak at approximately 5180 MHz. A red horizontal line indicates the 5G BAND 1-3 limit at 65.0 dBuV/m. The signal level at the peak is approximately 113.8 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.30</td> <td>53.88</td> <td>74.00</td> <td>-20.12</td> <td>46.09</td> <td>34.23</td> <td>10.61</td> <td>37.05</td> <td>0.00</td> <td>112</td> <td>62</td> <td>Peak</td> </tr> </tbody> </table> | Limit  | Read   | Ant    | Cable  | Preamp | Aux    | APos   | TPos   | Remark | Freq  | Level   | Line   | Margin | Level  | Factor | Loss   | Factor | Factor | MHz    | dBuV/m | dBuV/m | dB   | dBuV | dB/m | dB | dB | cm  | deg | 1       | 5149.30 | 53.88 | 74.00 | -20.12 | 46.09 | 34.23 | 10.61 | 37.05 | 0.00 | 112 | 62      | Peak    |
|   | Limit   | Read   | Ant    | Cable  | Preamp | Aux    | APos   | TPos   | Remark |        |       |         |        |        |        |        |        |        |        |        |        |        |      |      |      |    |    |     |     |         |         |       |       |        |       |       |       |       |      |     |         |         |
| Freq  | Level   | Line   | Margin | Level  | Factor | Loss   | Factor | Factor |        |        |       |         |        |        |        |        |        |        |        |        |        |        |      |      |      |    |    |     |     |         |         |       |       |        |       |       |       |       |      |     |         |         |
| MHz   | dBuV/m  | dBuV/m | dB     | dBuV   | dB/m   | dB     | dB     | cm     | deg    |        |       |         |        |        |        |        |        |        |        |        |        |        |      |      |      |    |    |     |     |         |         |       |       |        |       |       |       |       |      |     |         |         |
| 1   | 5149.30   | 53.88  | 74.00  | -20.12 | 46.09  | 34.23  | 10.61  | 37.05  | 0.00   | 112    | 62    | Peak    |        |        |        |        |        |        |        |        |        |        |      |      |      |    |    |     |     |         |         |       |       |        |       |       |       |       |      |     |         |         |
| <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a signal peak at approximately 5180 MHz. A red horizontal line indicates the 5G BAND 1-3 limit at 65.0 dBuV/m. The signal level at the peak is approximately 113.8 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>108.78</td> <td>68.30</td> <td>40.48</td> <td>100.90</td> <td>34.26</td> <td>10.63</td> <td>37.01</td> <td>0.00</td> <td>112</td> <td>62</td> <td>PEAK</td> </tr> </tbody> </table> | Limit   | Read   | Ant    | Cable  | Preamp | Aux    | APos   | TPos   | Remark | Freq   | Level | Line    | Margin | Level  | Factor | Loss   | Factor | Factor | MHz    | dBuV/m | dBuV/m | dB     | dBuV | dB/m | dB   | dB | cm | deg | 1   | 5180.00 | 108.78  | 68.30 | 40.48 | 100.90 | 34.26 | 10.63 | 37.01 | 0.00  | 112  | 62  | PEAK    |         |
| Limit   | Read  | Ant    | Cable  | Preamp | Aux    | APos   | TPos   | Remark |        |        |       |         |        |        |        |        |        |        |        |        |        |        |      |      |      |    |    |     |     |         |         |       |       |        |       |       |       |       |      |     |         |         |
| Freq  | Level   | Line   | Margin | Level  | Factor | Loss   | Factor | Factor |        |        |       |         |        |        |        |        |        |        |        |        |        |        |      |      |      |    |    |     |     |         |         |       |       |        |       |       |       |       |      |     |         |         |
| MHz   | dBuV/m  | dBuV/m | dB     | dBuV   | dB/m   | dB     | dB     | cm     | deg    |        |       |         |        |        |        |        |        |        |        |        |        |        |      |      |      |    |    |     |     |         |         |       |       |        |       |       |       |       |      |     |         |         |
| 1   | 5180.00   | 108.78 | 68.30  | 40.48  | 100.90 | 34.26  | 10.63  | 37.01  | 0.00   | 112    | 62    | PEAK    |        |        |        |        |        |        |        |        |        |        |      |      |      |    |    |     |     |         |         |       |       |        |       |       |       |       |      |     |         |         |
| <b>Avg</b>  | <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The plot shows the average signal level. A red horizontal line indicates the 5G BAND 1-3 (AVG) limit at 48.8 dBuV/m. The signal level at the peak is approximately 113.8 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>40.21</td> <td>54.00</td> <td>-13.79</td> <td>32.42</td> <td>34.23</td> <td>10.61</td> <td>37.05</td> <td>0.00</td> <td>112</td> <td>62</td> <td>AVERAGE</td> </tr> </tbody> </table>       | Limit  | Read   | Ant    | Cable  | Preamp | Aux    | APos   | TPos   | Remark | Freq  | Level   | Line   | Margin | Level  | Factor | Loss   | Factor | Factor | MHz    | dBuV/m | dBuV/m | dB   | dBuV | dB/m | dB | dB | cm  | deg | 1       | 5150.00 | 40.21 | 54.00 | -13.79 | 32.42 | 34.23 | 10.61 | 37.05 | 0.00 | 112 | 62      | AVERAGE |
|   | Limit   | Read   | Ant    | Cable  | Preamp | Aux    | APos   | TPos   | Remark |        |       |         |        |        |        |        |        |        |        |        |        |        |      |      |      |    |    |     |     |         |         |       |       |        |       |       |       |       |      |     |         |         |
| Freq  | Level   | Line   | Margin | Level  | Factor | Loss   | Factor | Factor |        |        |       |         |        |        |        |        |        |        |        |        |        |        |      |      |      |    |    |     |     |         |         |       |       |        |       |       |       |       |      |     |         |         |
| MHz   | dBuV/m  | dBuV/m | dB     | dBuV   | dB/m   | dB     | dB     | cm     | deg    |        |       |         |        |        |        |        |        |        |        |        |        |        |      |      |      |    |    |     |     |         |         |       |       |        |       |       |       |       |      |     |         |         |
| 1   | 5150.00   | 40.21  | 54.00  | -13.79 | 32.42  | 34.23  | 10.61  | 37.05  | 0.00   | 112    | 62    | AVERAGE |        |        |        |        |        |        |        |        |        |        |      |      |      |    |    |     |     |         |         |       |       |        |       |       |       |       |      |     |         |         |
| <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows the average signal level. A red horizontal line indicates the 5G BAND 1-3 (AVG) limit at 48.8 dBuV/m. The signal level at the peak is approximately 113.8 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>102.14</td> <td>68.30</td> <td>33.84</td> <td>94.23</td> <td>34.27</td> <td>10.64</td> <td>37.00</td> <td>0.00</td> <td>112</td> <td>62</td> <td>AVERAGE</td> </tr> </tbody> </table>        | Limit   | Read   | Ant    | Cable  | Preamp | Aux    | APos   | TPos   | Remark | Freq   | Level | Line    | Margin | Level  | Factor | Loss   | Factor | Factor | MHz    | dBuV/m | dBuV/m | dB     | dBuV | dB/m | dB   | dB | cm | deg | 1   | 5180.00 | 102.14  | 68.30 | 33.84 | 94.23  | 34.27 | 10.64 | 37.00 | 0.00  | 112  | 62  | AVERAGE |         |
| Limit   | Read  | Ant    | Cable  | Preamp | Aux    | APos   | TPos   | Remark |        |        |       |         |        |        |        |        |        |        |        |        |        |        |      |      |      |    |    |     |     |         |         |       |       |        |       |       |       |       |      |     |         |         |
| Freq  | Level   | Line   | Margin | Level  | Factor | Loss   | Factor | Factor |        |        |       |         |        |        |        |        |        |        |        |        |        |        |      |      |      |    |    |     |     |         |         |       |       |        |       |       |       |       |      |     |         |         |
| MHz   | dBuV/m  | dBuV/m | dB     | dBuV   | dB/m   | dB     | dB     | cm     | deg    |        |       |         |        |        |        |        |        |        |        |        |        |        |      |      |      |    |    |     |     |         |         |       |       |        |       |       |       |       |      |     |         |         |
| 1   | 5180.00   | 102.14 | 68.30  | 33.84  | 94.23  | 34.27  | 10.64  | 37.00  | 0.00   | 112    | 62    | AVERAGE |        |        |        |        |        |        |        |        |        |        |      |      |      |    |    |     |     |         |         |       |       |        |       |       |       |       |      |     |         |         |