



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2341-2
FCC ID : IHDT56AM1
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Mar. 31, 2023 ~ May 18, 2023

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (ShenZhen)

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test..... 5

 1.4 Product Specification of Equipment Under Test..... 5

 1.5 Modification of EUT 5

 1.6 Specification of Accessory 6

 1.7 Testing Location 7

 1.8 Test Software..... 7

 1.9 Applicable Standards..... 8

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 9

 2.1 Carrier Frequency and Channel 9

 2.2 Test Mode 10

 2.3 Connection Diagram of Test System 11

 2.4 Support Unit used in test configuration and system 11

 2.5 EUT Operation Test Setup 12

 2.6 Measurement Results Explanation Example..... 12

3 TEST RESULT 13

 3.1 6dB and 99% Bandwidth Measurement 13

 3.2 Output Power Measurement..... 15

 3.3 Power Spectral Density Measurement 16

 3.4 Conducted Band Edges and Spurious Emission Measurement 18

 3.5 Radiated Band Edges and Spurious Emission Measurement 31

 3.6 AC Conducted Emission Measurement..... 35

 3.7 Antenna Requirements 37

4 LIST OF MEASURING EQUIPMENT 38

5 MEASUREMENT UNCERTAINTY 39

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION AND PLOTS

APPENDIX D. DUTY CYCLE PLOTS

APPENDIX E. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	≥ 0.5MHz	Pass	-
3.1	-	99% Bandwidth	-	Report Only	-
3.2	15.247(b)	Power Output Measurement	≤ 30dBm	Pass	-
3.3	15.247(e)	Power Spectral Density	≤ 8dBm/3kHz	Pass	-
3.4	15.247(d)	Conducted Band Edges	≤ 20dBc	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.74 dB at 2483.700 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 14.80 dB at 0.159 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Remark: Not required means after assessing, test items are not necessary to carry out.

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2341-2
FCC ID	IHDT56AM1
IMEI Code	Conducted: 352000530005895/352000530005903 Conduction: 352000530005416/352000530005424 Radiation: 352000530016413/352000530016421
HW Version	DVT2
SW Version	TLA33.30
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 22.63 dBm (0.1832 W) 802.11g : 24.95 dBm (0.3126 W) 802.11n HT20 : 24.92 dBm (0.3105 W)
99% Occupied Bandwidth	802.11b : 12.040MHz 802.11g : 19.080MHz 802.11n HT20 : 20.280MHz
Antenna Type / Gain	PIFA Antenna type with gain -3.00 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

Remark: Ant 1 in Conducted and RSE test data corresponds to BT/WIFI antenna in EP.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Specification of Accessory

Specification of Accessory				
AC Adapter 1 (US)	Brand Name	Motorola (Salcomp)	Model Name	MC-201L
AC Adapter 1 (EU)	Brand Name	Motorola (Salcomp)	Model Name	MC-202L
AC Adapter 1 (AR)	Brand Name	Motorola (Salcomp)	Model Name	MC-206L
AC Adapter 1 (BR)	Brand Name	Motorola (Salcomp)	Model Name	MC-207L
AC Adapter 1 (CHILE)	Brand Name	Motorola (Salcomp)	Model Name	MC-209L
AC Adapter 2 (US)	Brand Name	Motorola (Aohai)	Model Name	MC-201L
AC Adapter 2 (EU)	Brand Name	Motorola (Aohai)	Model Name	MC-202L
AC Adapter 2 (AR)	Brand Name	Motorola (Aohai)	Model Name	MC-206L
AC Adapter 3 (US)	Brand Name	Motorola (Aohai)	Model Name	MC-101
AC Adapter 3 (EU)	Brand Name	Motorola (Aohai)	Model Name	MC-102
AC Adapter 3 (UK)	Brand Name	Motorola (Aohai)	Model Name	MC-103
AC Adapter 3 (AU)	Brand Name	Motorola (Aohai)	Model Name	MC-105
AC Adapter 4 (US)	Brand Name	Motorola (Chenyang)	Model Name	MC-101
AC Adapter 4 (EU)	Brand Name	Motorola (Chenyang)	Model Name	MC-102
AC Adapter 4 (UK)	Brand Name	Motorola (Chenyang)	Model Name	MC-103
AC Adapter 4 (AU)	Brand Name	Motorola (Chenyang)	Model Name	MC-105
AC Adapter 5 (US)	Brand Name	Motorola (Salcomp)	Model Name	MC-101
AC Adapter 5 (EU)	Brand Name	Motorola (Salcomp)	Model Name	MC-102
AC Adapter 5 (UK)	Brand Name	Motorola (Salcomp)	Model Name	MC-103
AC Adapter 5 (AU)	Brand Name	Motorola (Salcomp)	Model Name	MC-105
Battery 1	Brand Name	Motorola (ATL)	Model Name	PC50
Battery 2	Brand Name	Motorola (SCUD)	Model Name	PC50
Earphone 1	Brand Name	Motorola (New leader)	Model Name	NLD-EM313A-20SF
Earphone 2	Brand Name	Motorola (JWELL)	Model Name	JWEP1205-L20H
USB Cable 1	Brand Name	Motorola (SAIBAO)	Model Name	SLQ-A214A
USB Cable 2	Brand Name	Motorola (JWELL)	Model Name	ATOC



1.7 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People’s Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS TH01-KS	CN1257	314309

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH03-SZ	CN1256	421272

Test data subcontracted: Radiated Spurious Emission test results in section 3.5 of this report.

1.8 Test Software

Item	Site	Manufacturer	Name	Version
1.	CO01-KS	AUDIX	E3	6.2009-8-24
2.	03CH03-SZ	AUDIX	E3	6.2009-8-24



1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		



2.2 Test Mode


Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0

Test Cases	
AC Conducted Emission	Mode 1 :GSM 850 Idle + Bluetooth Link + WLAN Link (2.4G) + USB Cable 2(Charging from Adapter5) + Earphone 2 + Battery 1
Remark:	
<ol style="list-style-type: none"> For Radiated Test Cases, The tests were performance with Adapter 1, Battery 1, Earphone 1, and USB Cable 1 The RSE Co-location mode is assessed from the worst WLAN TX + WWAN Link mode. 	

Simultaneous transmission
802.11g Tx_Ch11 + LTE Band13_BW

2.3 Connection Diagram of Test System

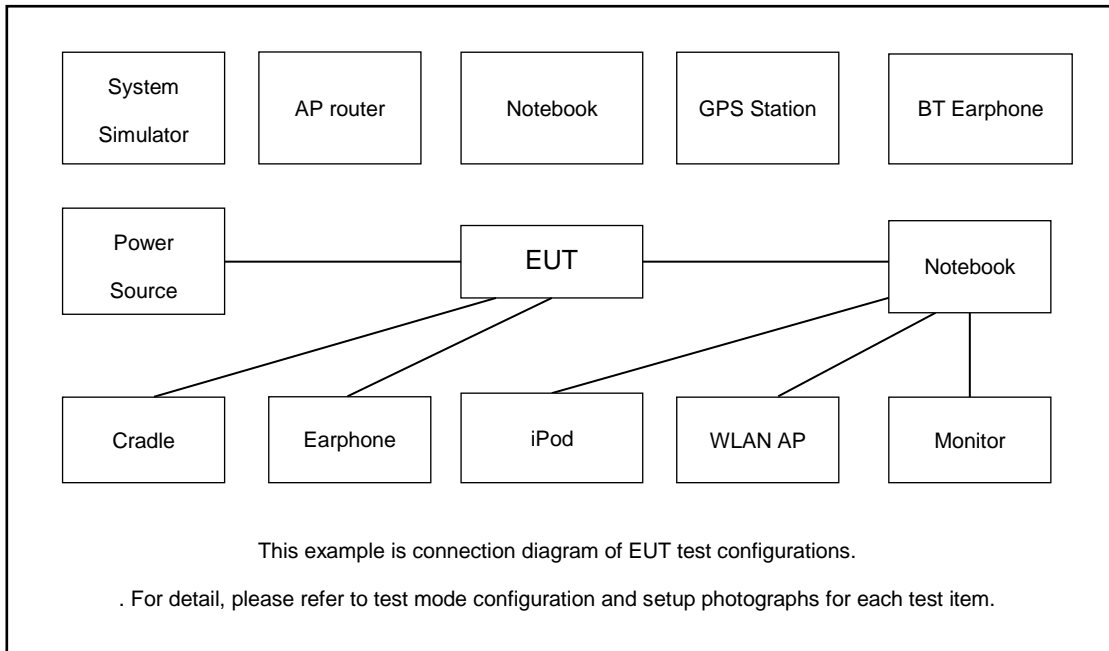

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritus	MT8821C	N/A	N/A	Unshielded,1.8m
2.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
3.	Notebook	Lenovo	V130-15IKB005	N/A	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
4.	Bluetooth Earphone	Lenovo	thinkplus-BH3	N/A	N/A	N/A



2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 6.0 dB

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} \\ &= 6.0 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1%~5% of OBW and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.


3.1.4 Test Setup





3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

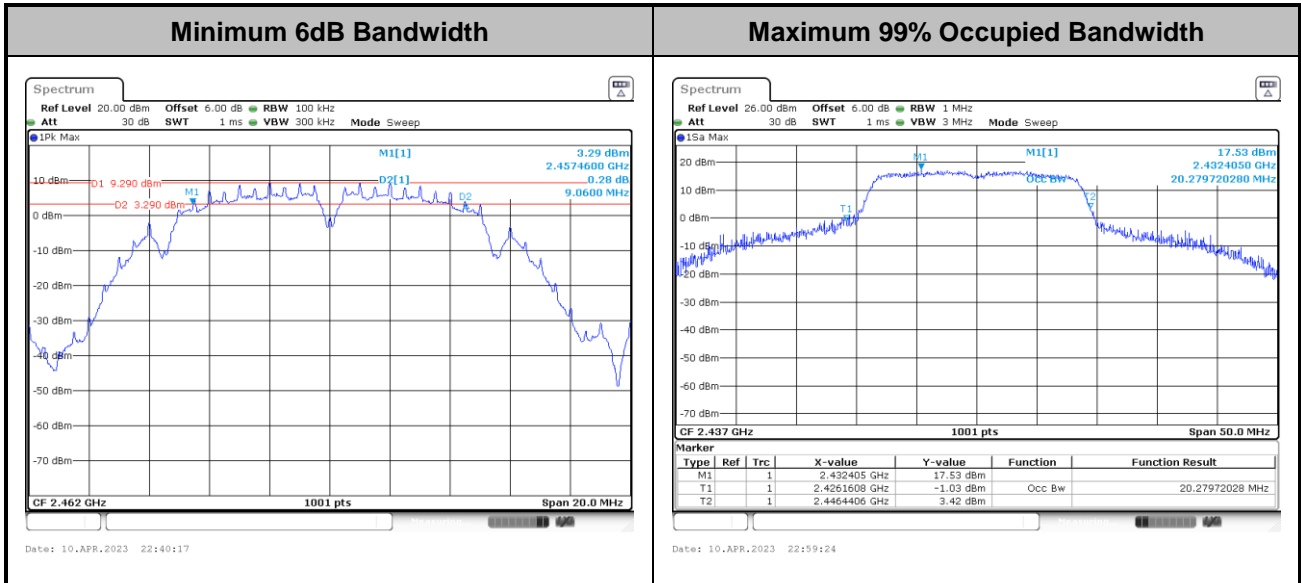

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

3.2.4 Test Setup

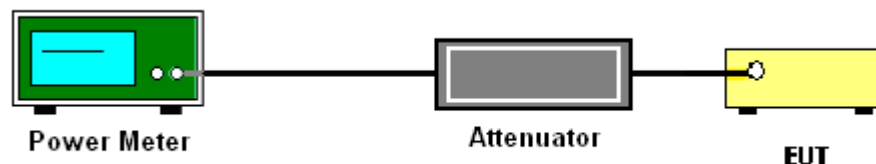

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures


1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup

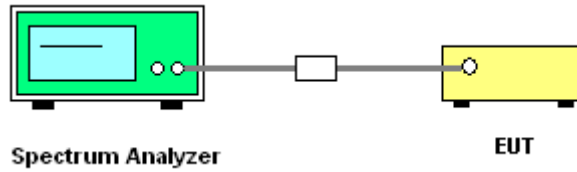

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

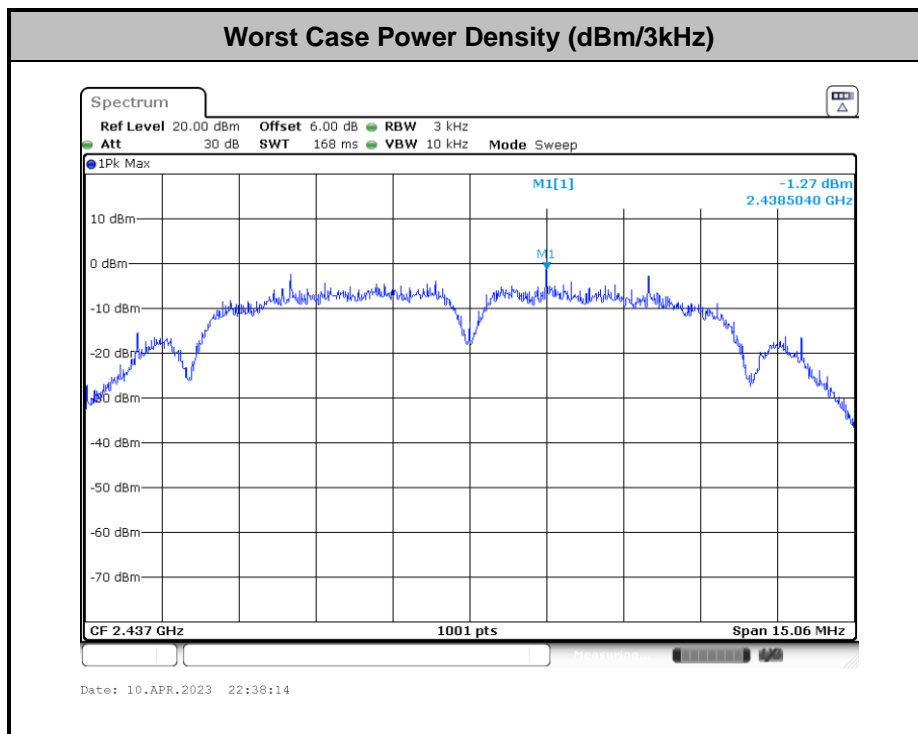

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.11
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

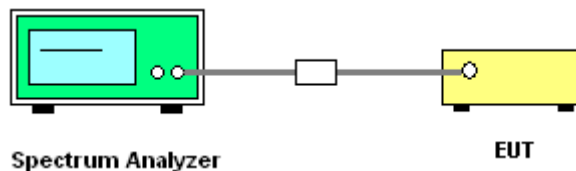




3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Engineer : Albert shi	Temperature :	21~25°C
	Relative Humidity :	51~54%



Number of TX = 1, Ant. 1 (Measured)

Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

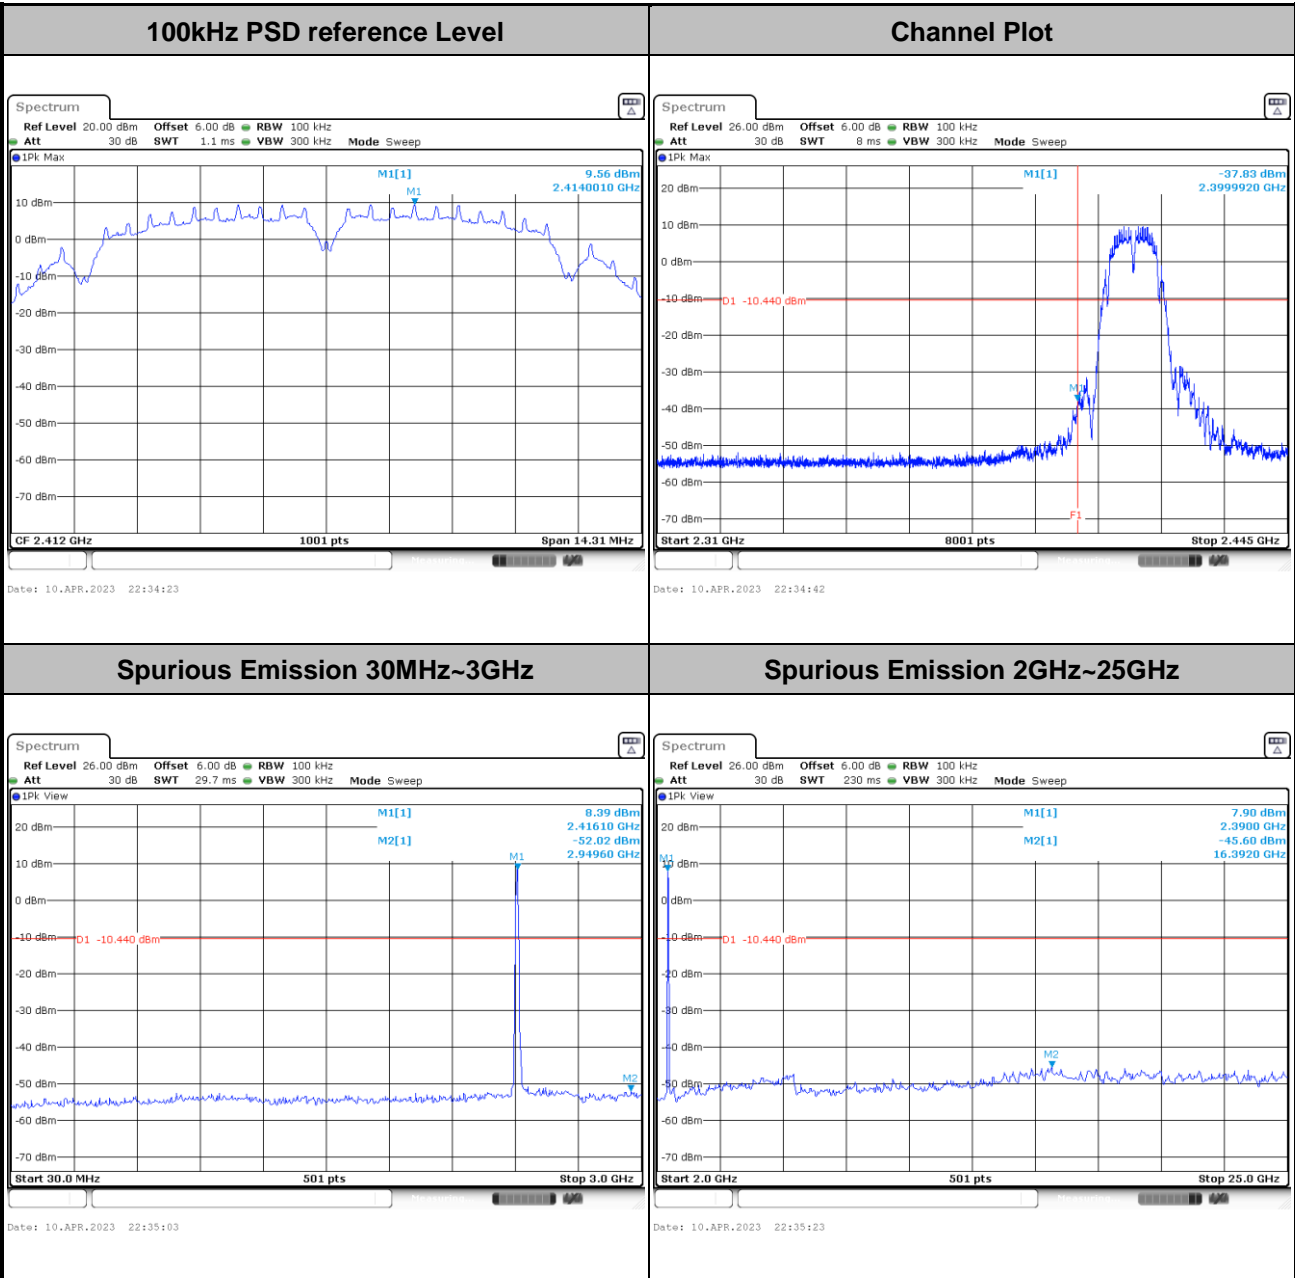





Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

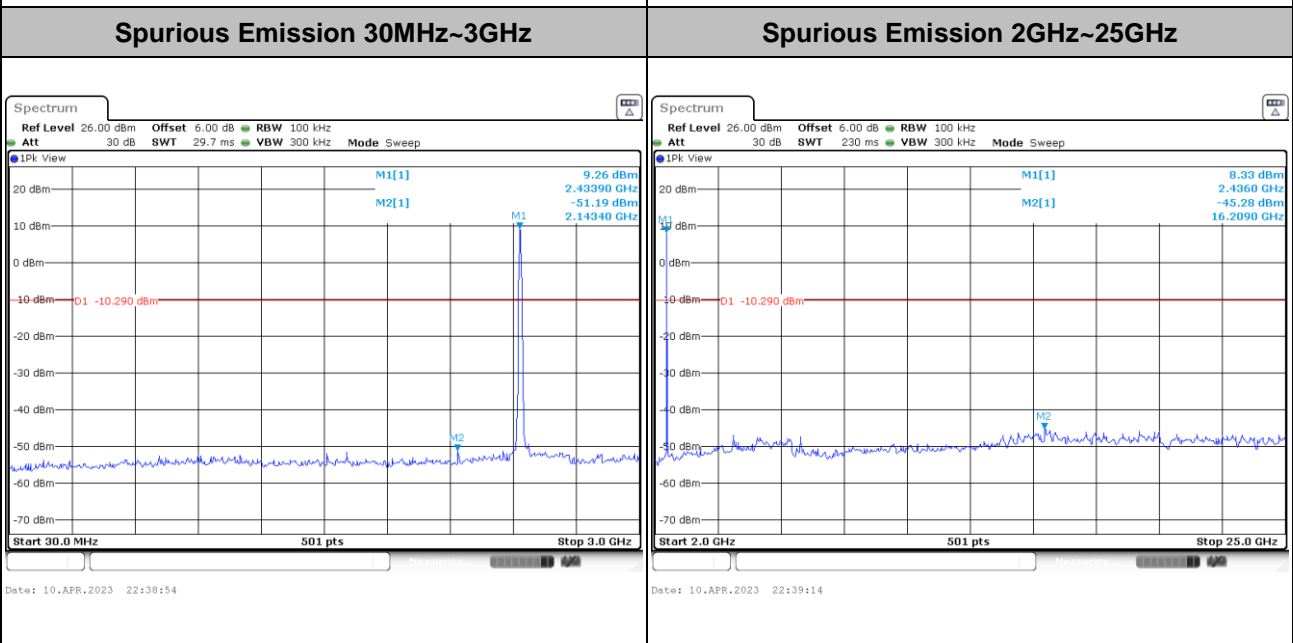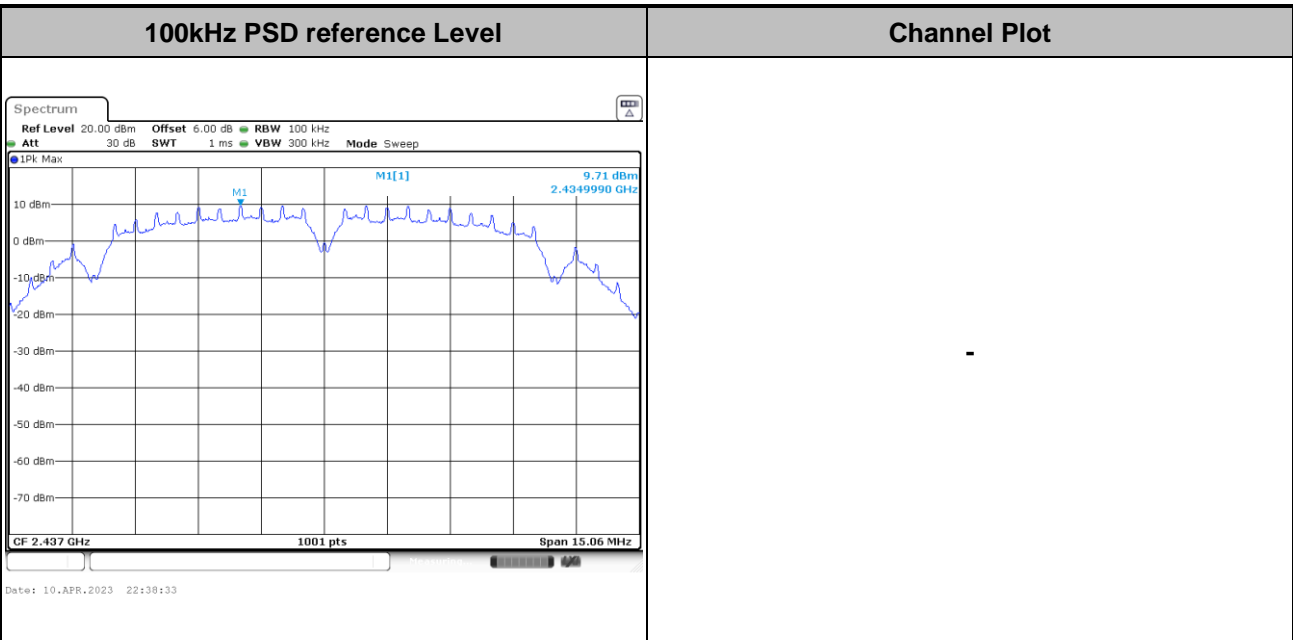





Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

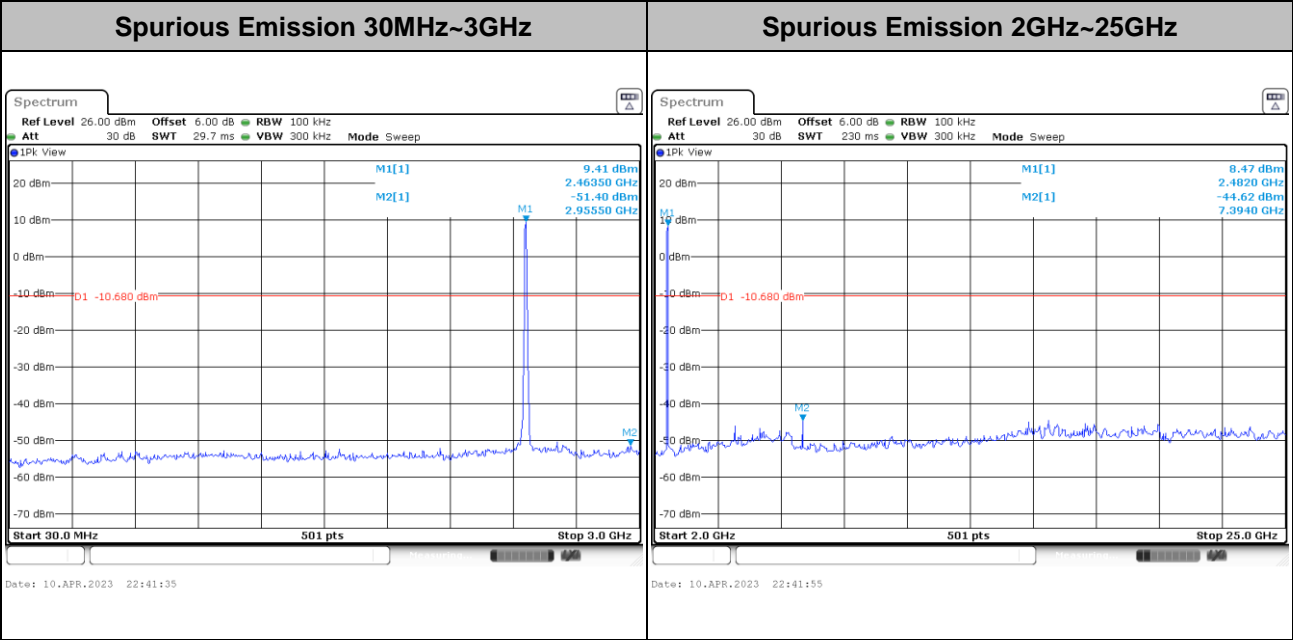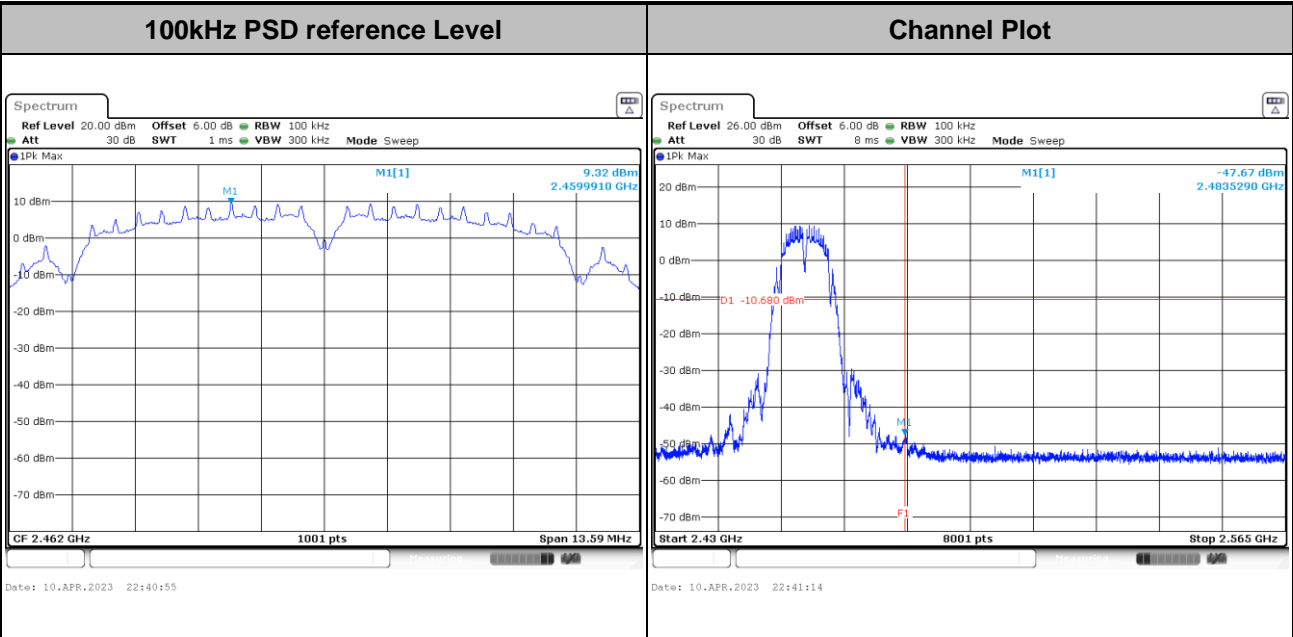




Test Mode : 802.11g Test Channel : 01

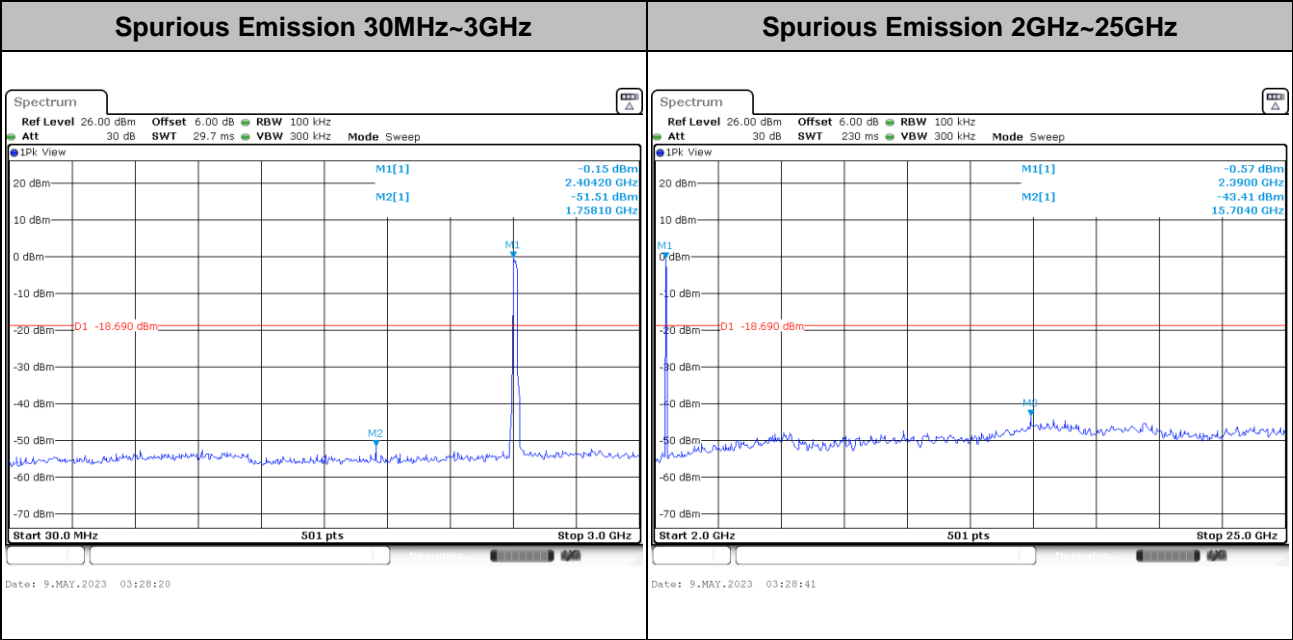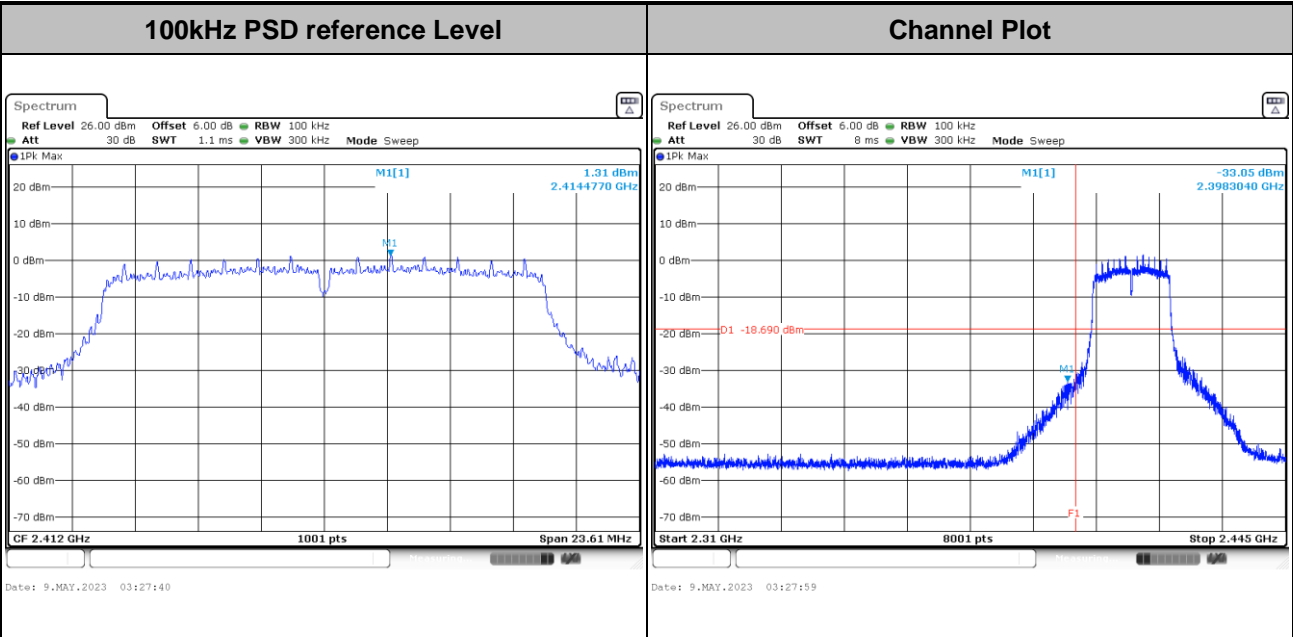




Test Mode :	802.11g	Test Channel :	02
-------------	---------	----------------	----

100kHz PSD reference Level	Channel Plot
-----------------------------------	---------------------

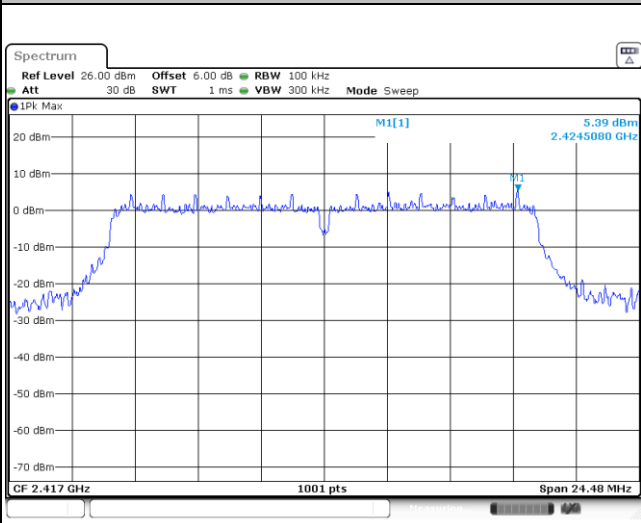


Date: 12 MAY 2023 22:28:17

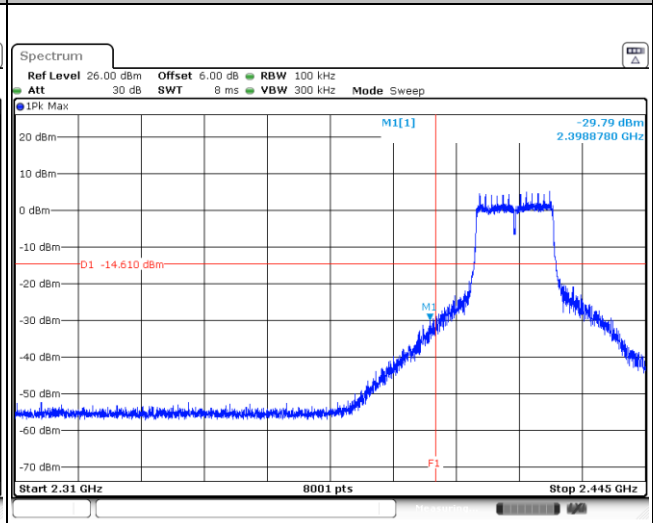


Date: 12 MAY 2023 22:28:36

Spurious Emission 30MHz~3GHz	Spurious Emission 2GHz~25GHz
-------------------------------------	-------------------------------------

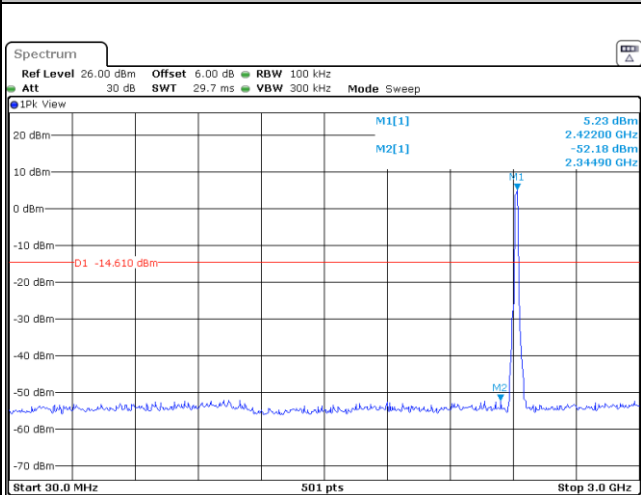



Date: 12 MAY 2023 22:28:56

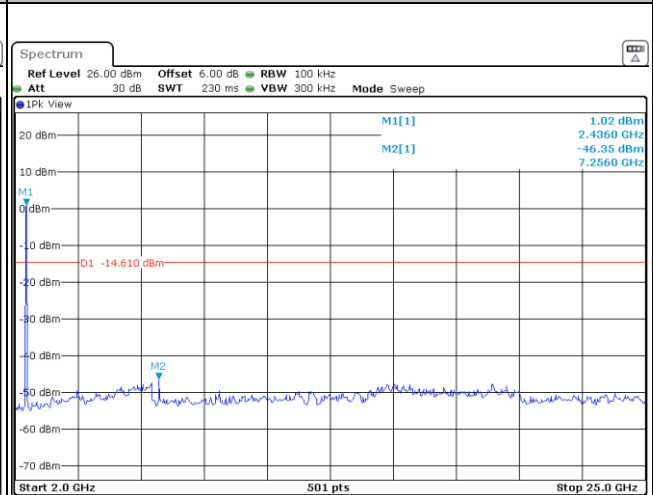

Date: 12 MAY 2023 22:29:16





Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

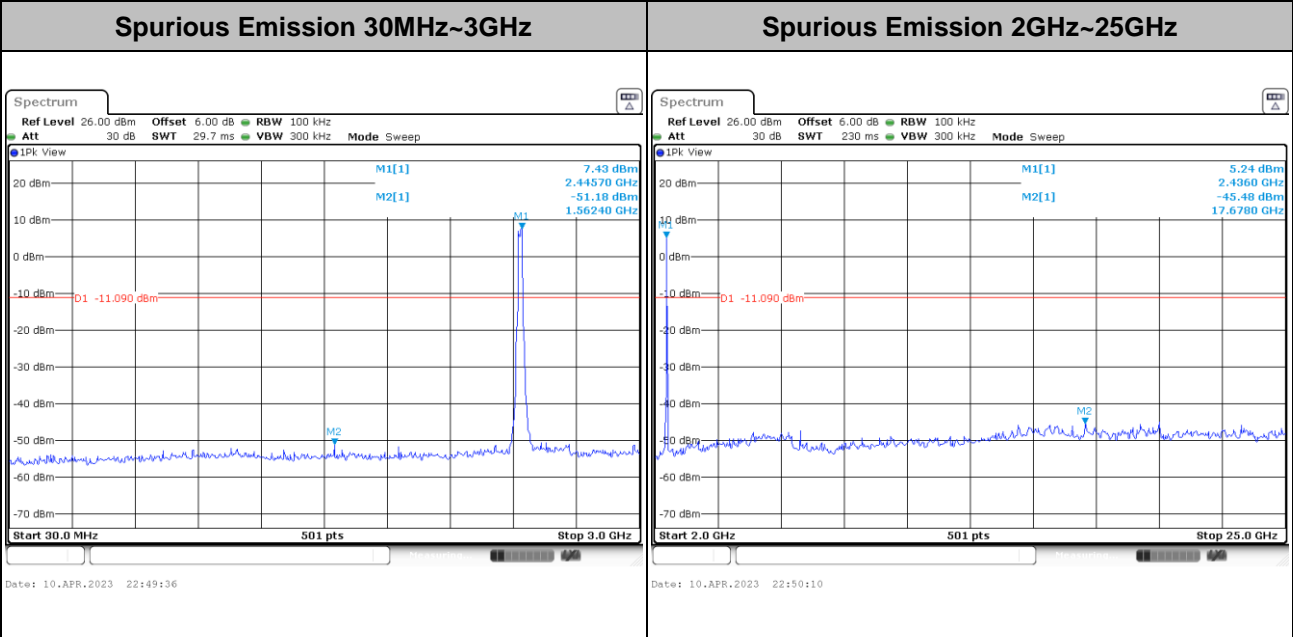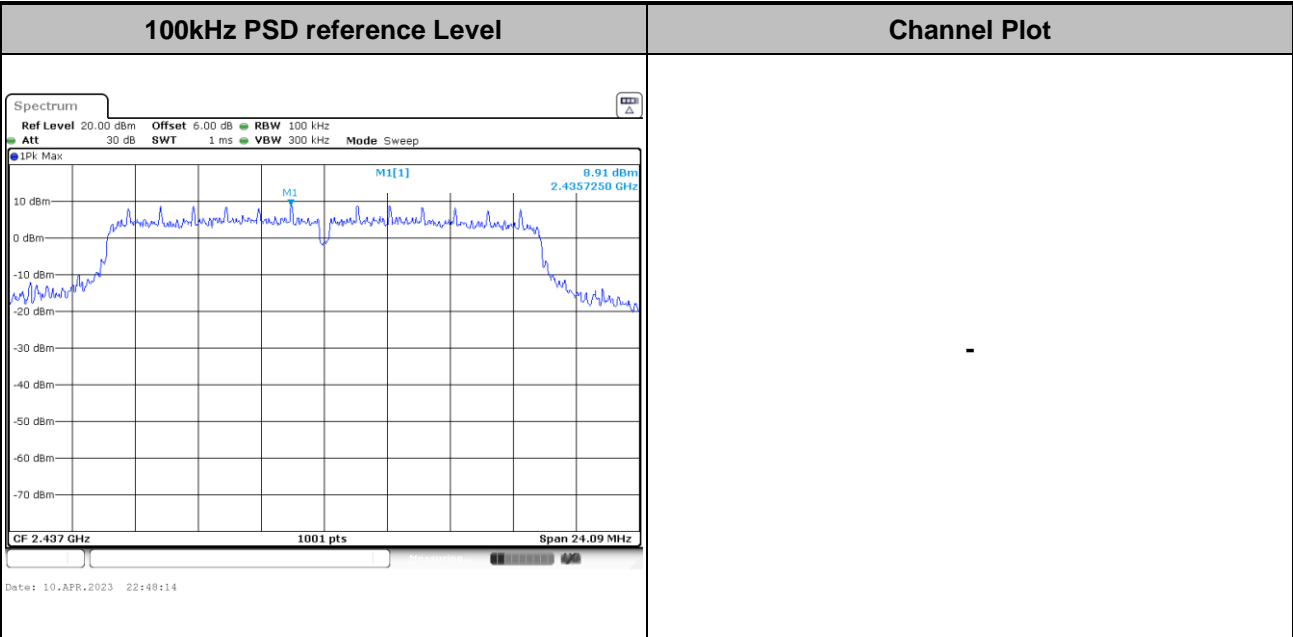







Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----

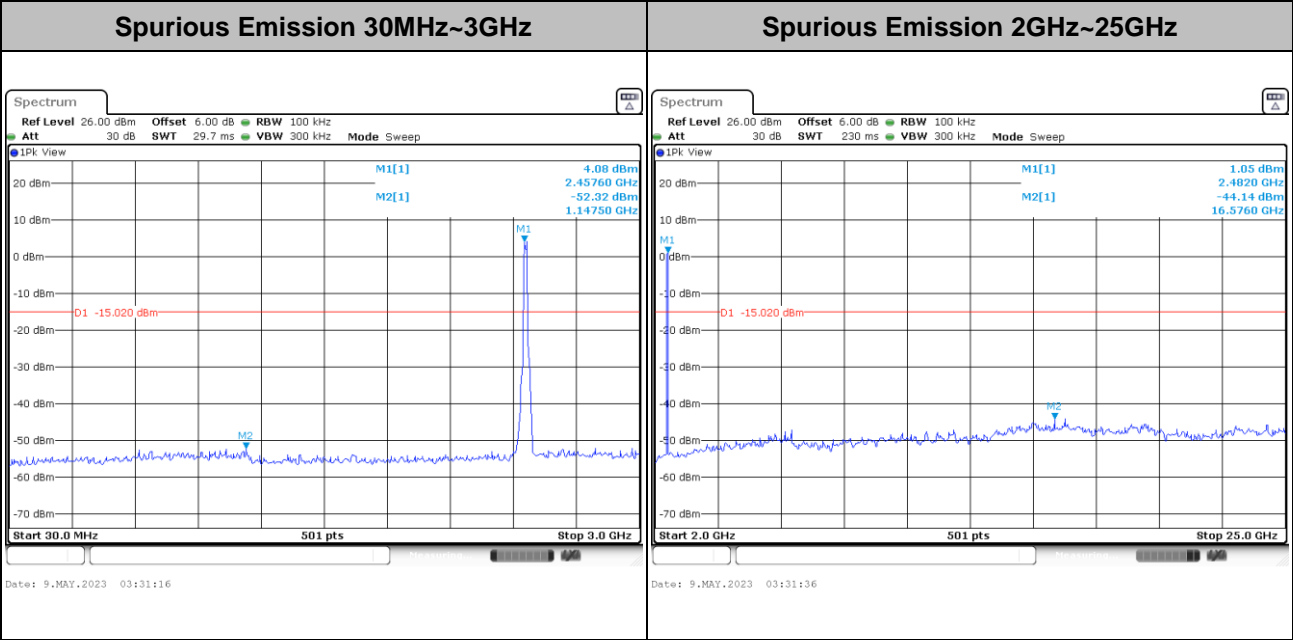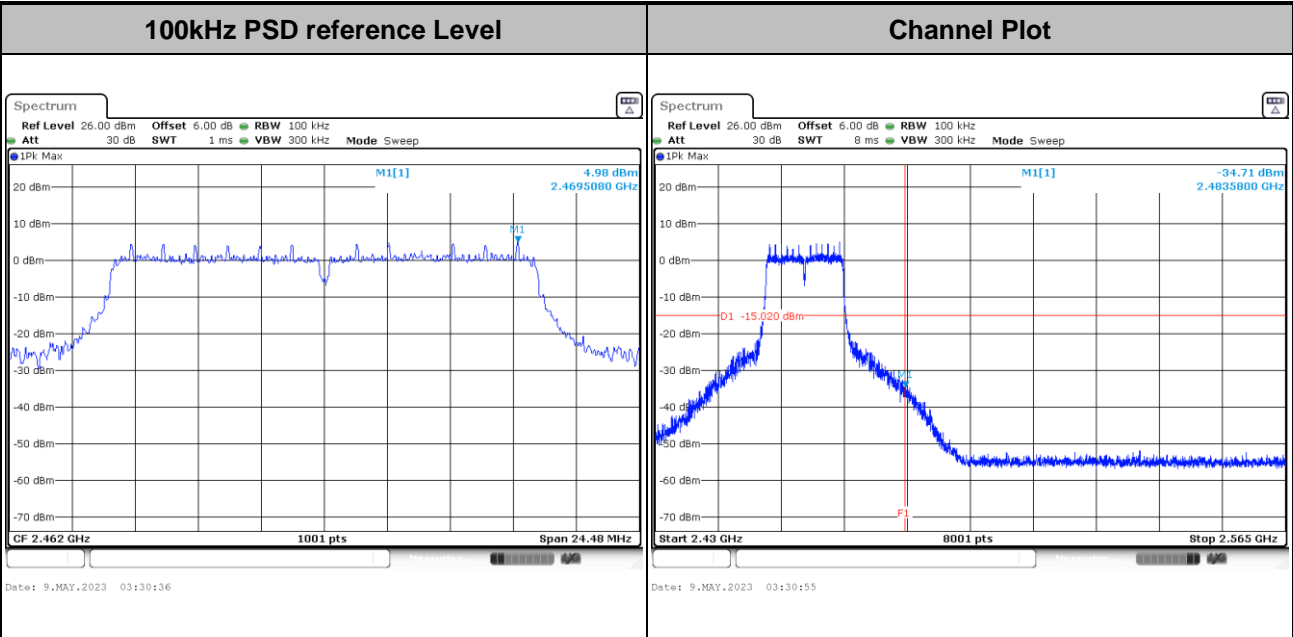




Test Mode : 802.11n HT20 Test Channel : 01

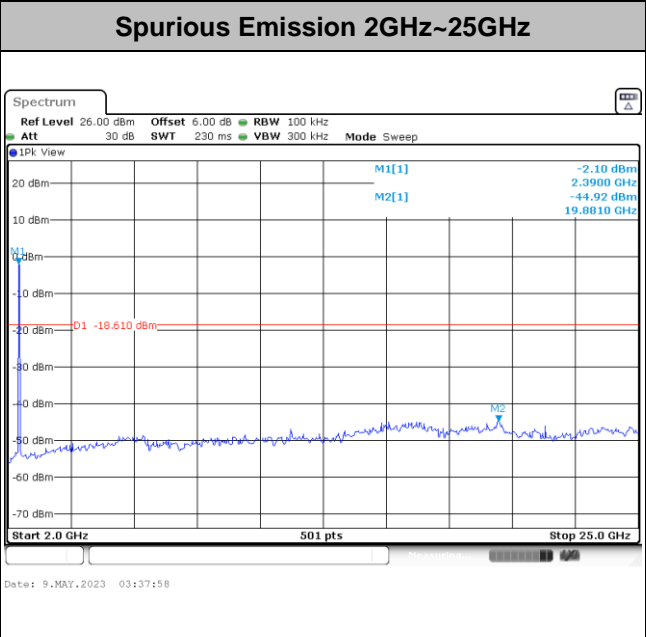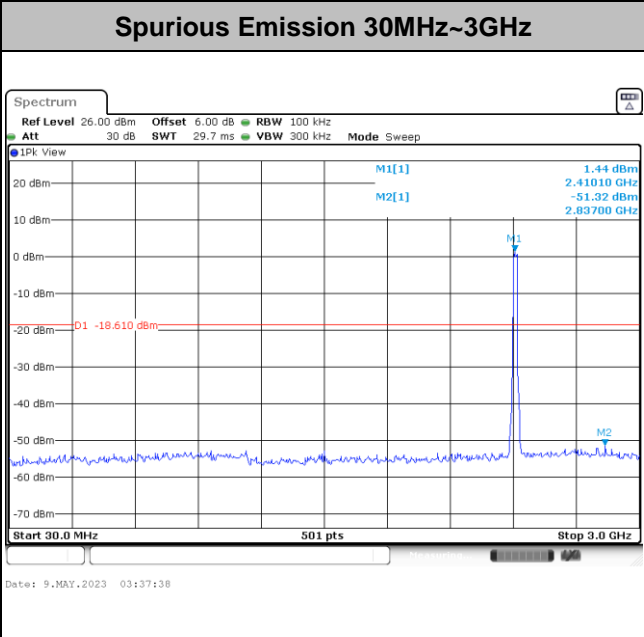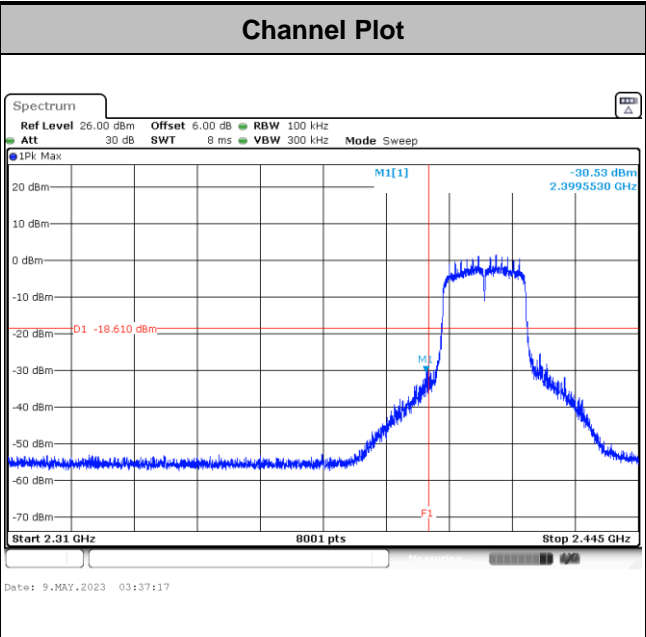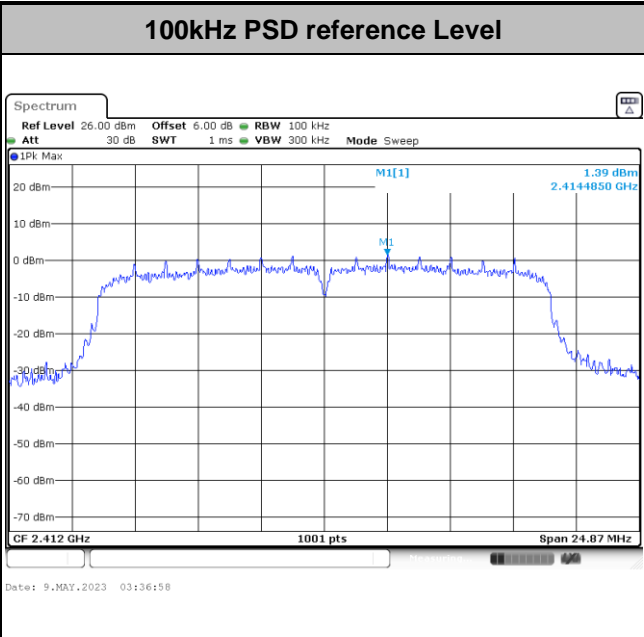





Test Mode :	802.11n HT20	Test Channel :	02
-------------	--------------	----------------	----

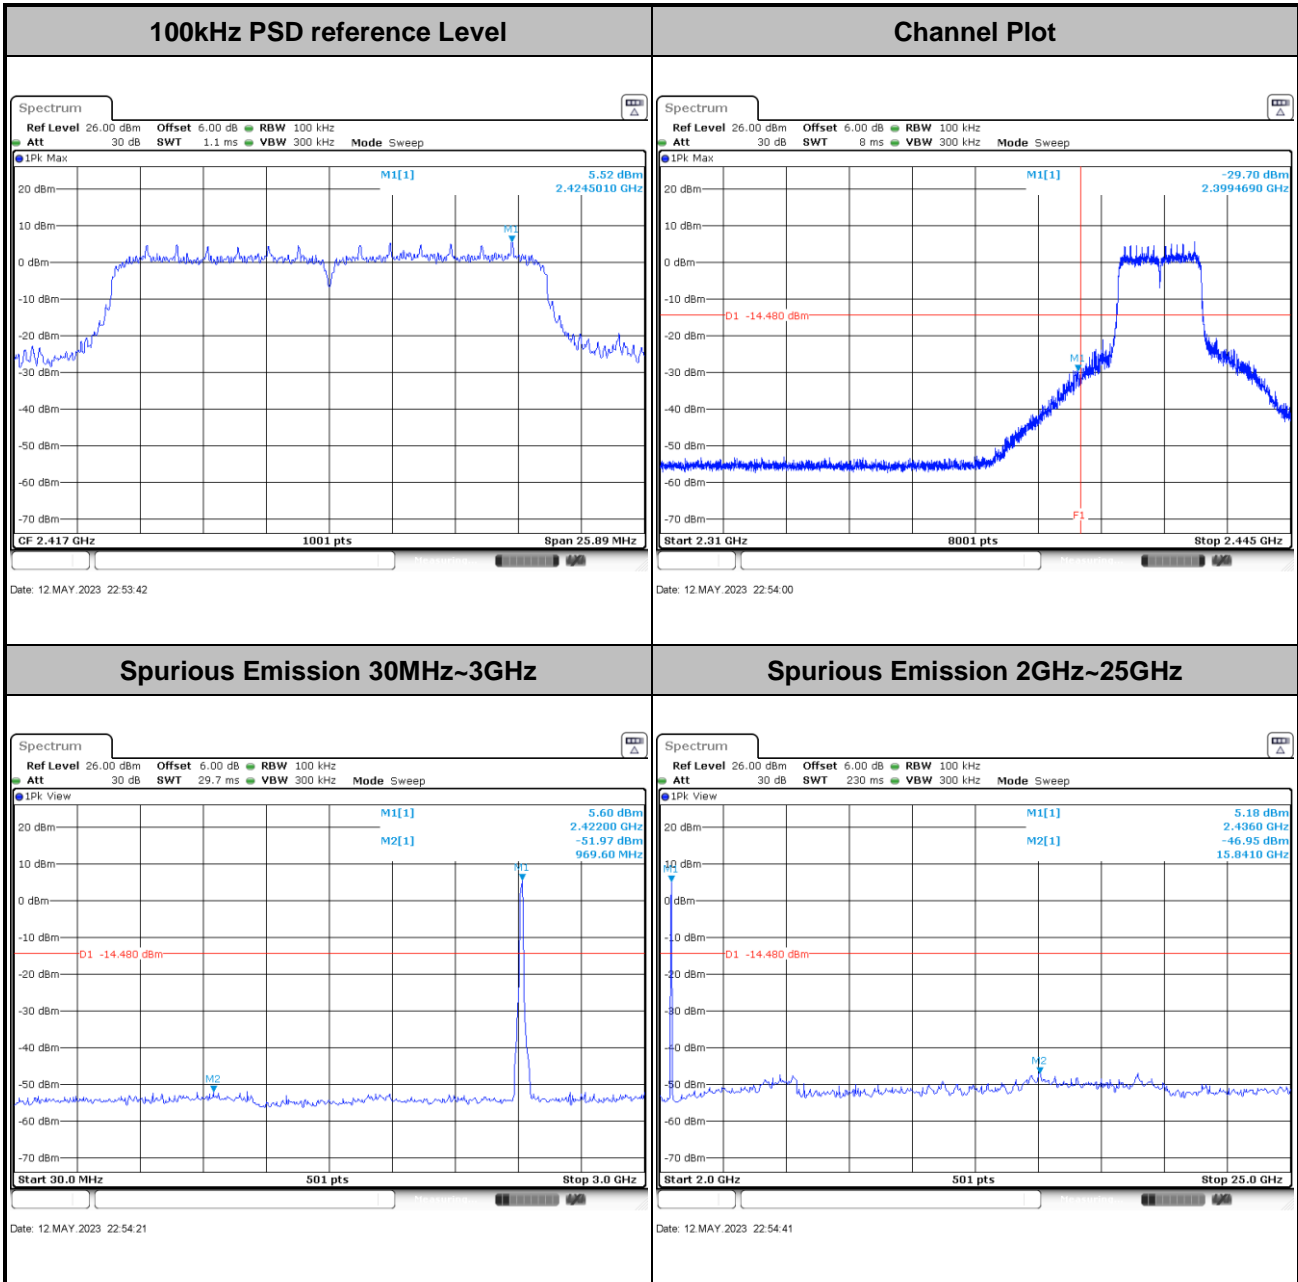





Test Mode :	802.11n HT20	Test Channel :	06
-------------	--------------	----------------	----

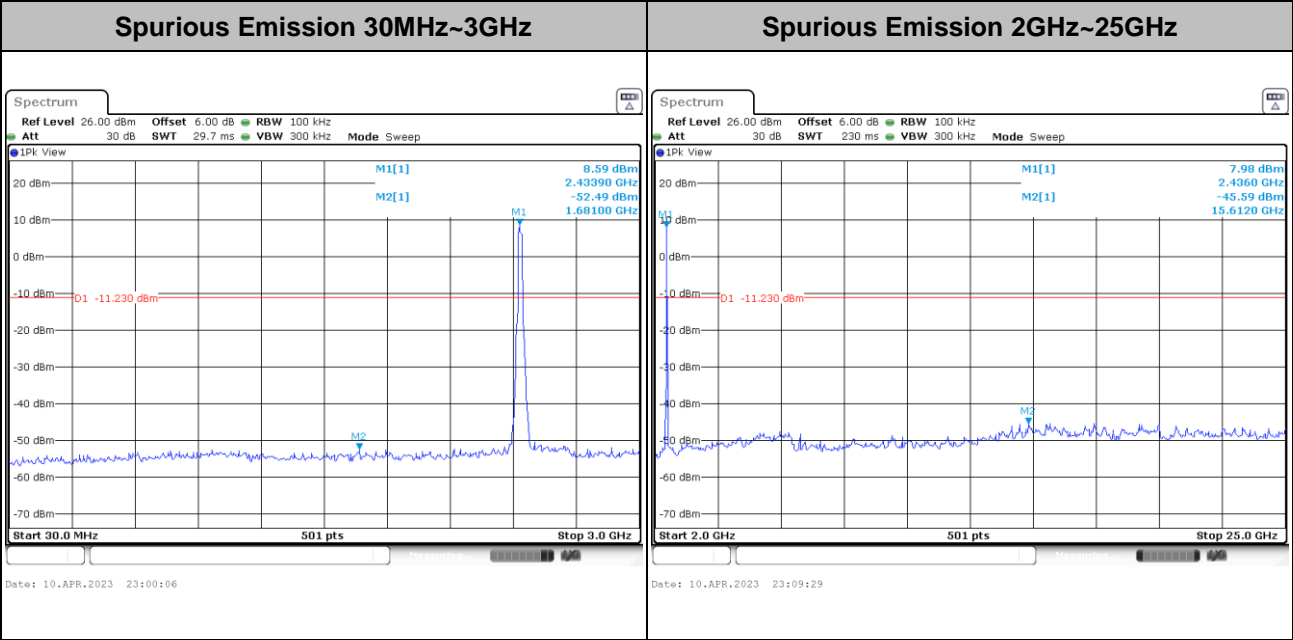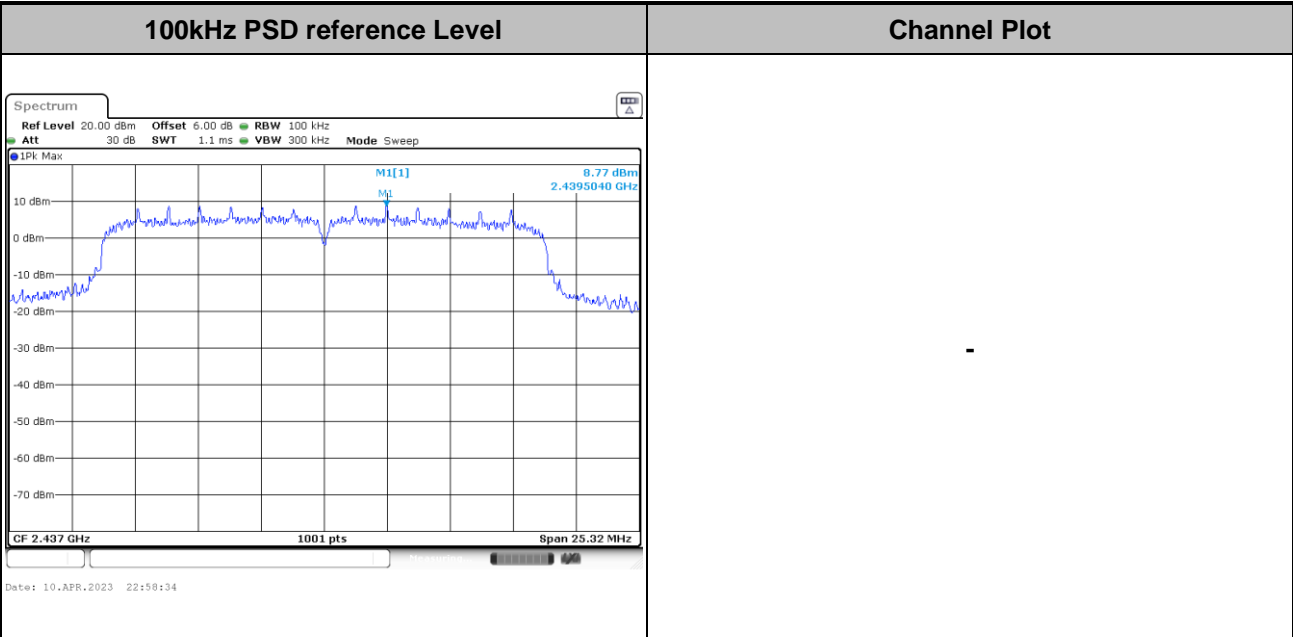




Test Mode : 802.11n HT20 Test Channel : 10


100kHz PSD reference Level Channel Plot

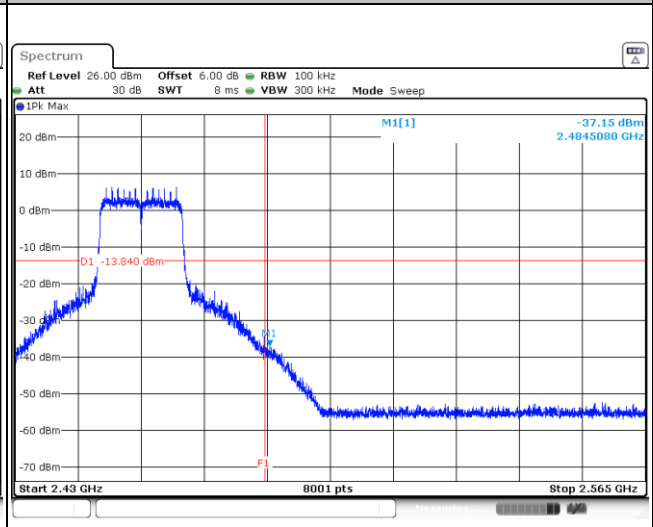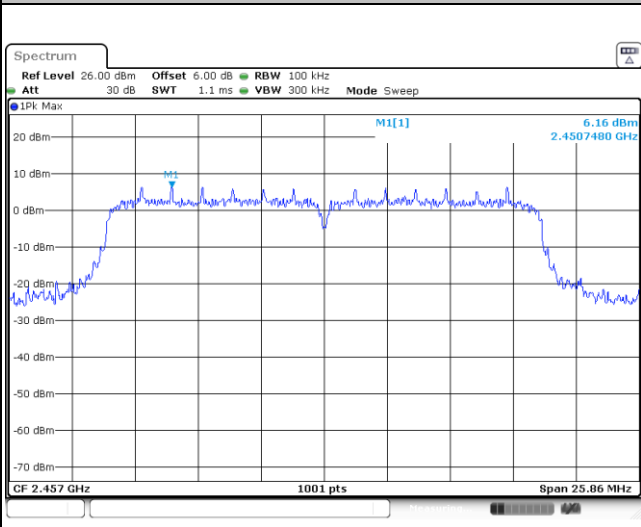

Spurious Emission 30MHz~3GHz


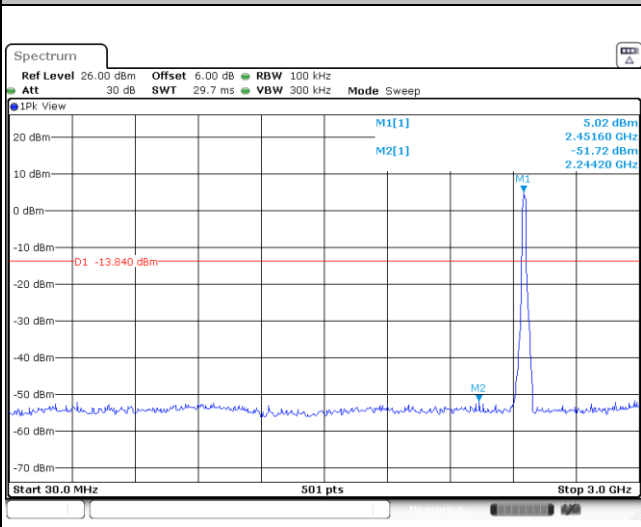


Spurious Emission 2GHz~25GHz

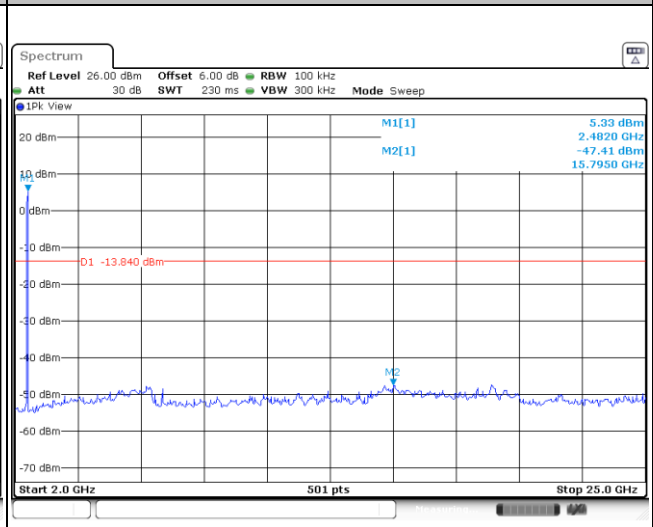



Test Mode :	802.11n HT20	Test Channel :	11
-------------	--------------	----------------	----

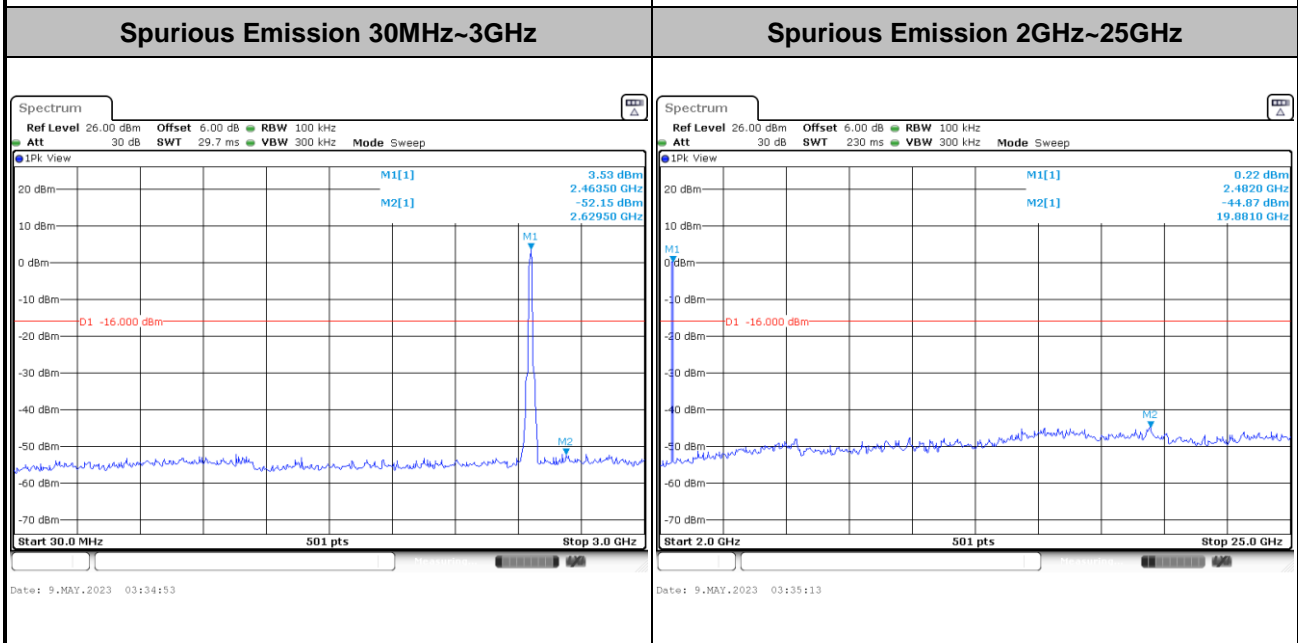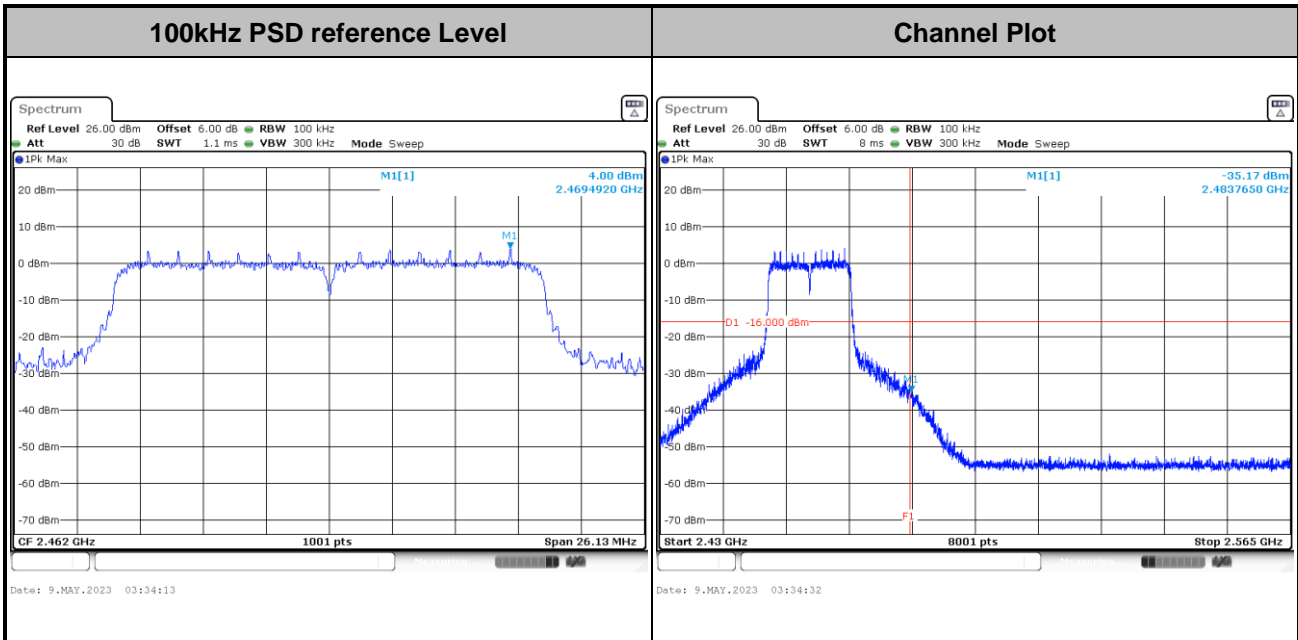



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

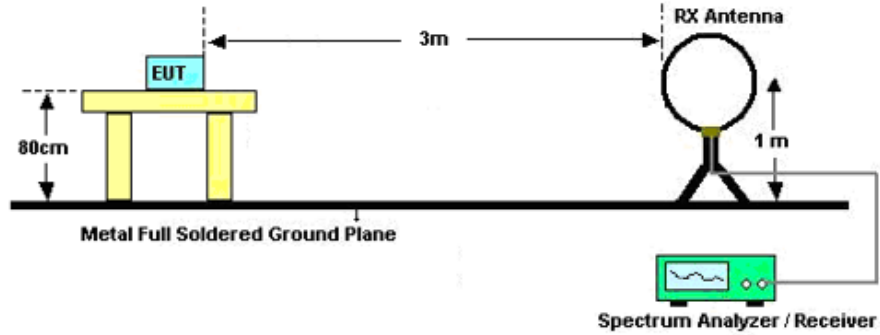

For radiated emissions from 30MHz to 1GHz

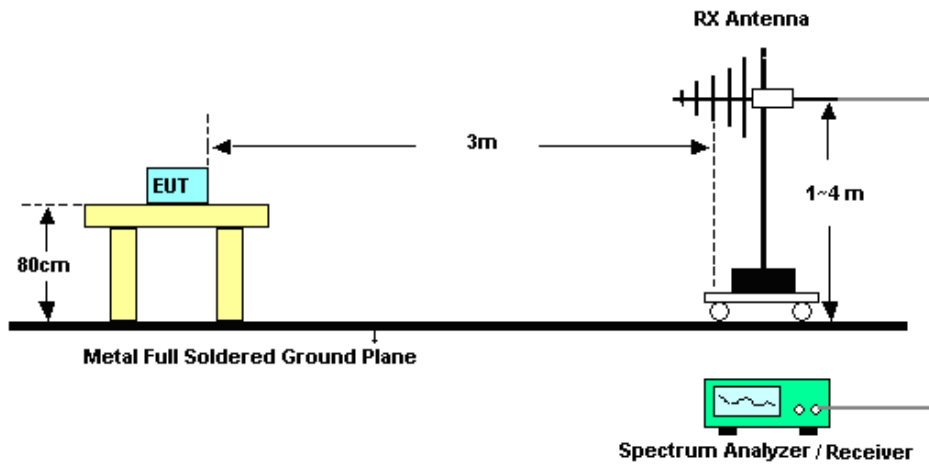

For radiated emissions above 1GHz

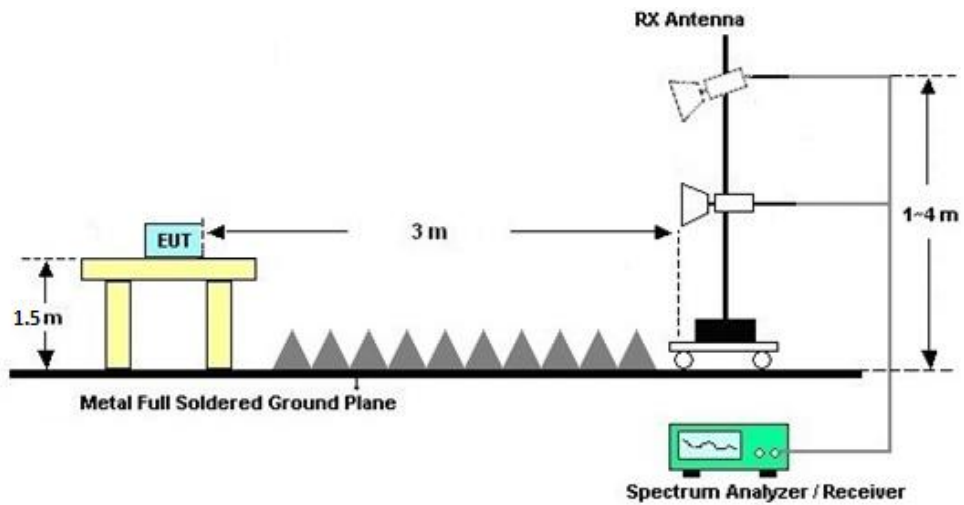



3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C

3.5.7 Duty Cycle

Please refer to Appendix D

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

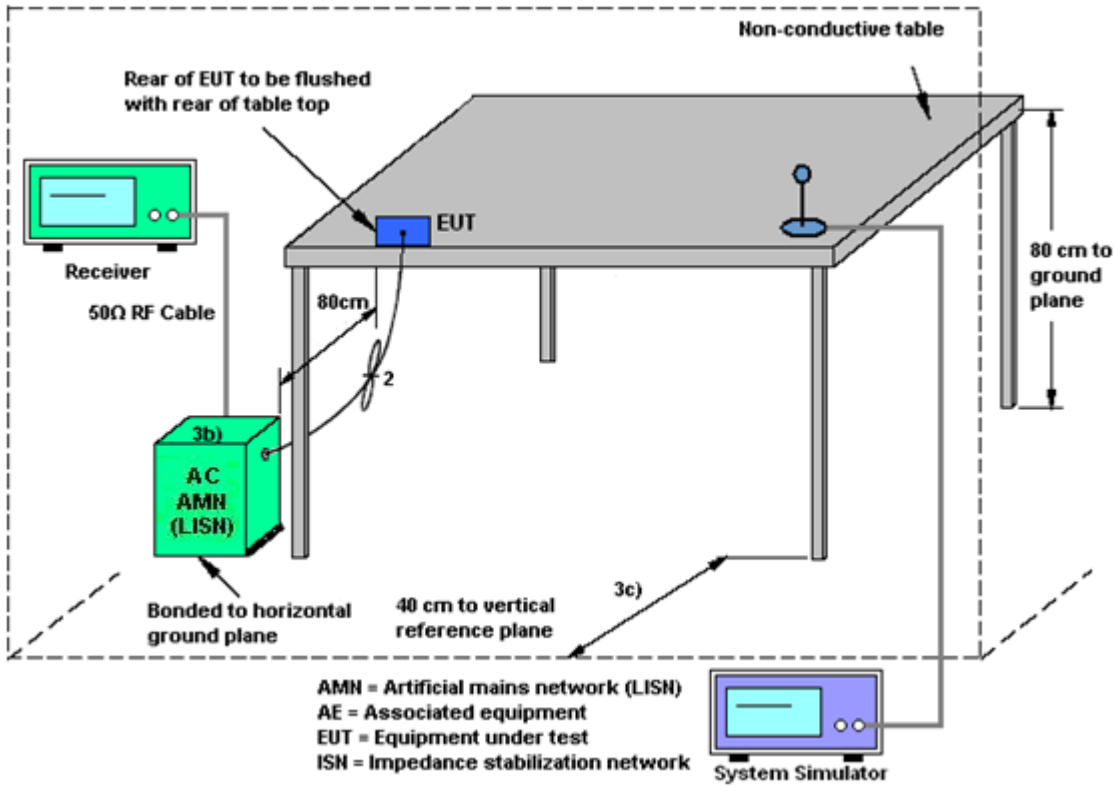

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV30	101338	10Hz~30GHz	May 24, 2022	Apr. 10, 2023 ~May 12, 2023	May 23, 2023	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022	Apr. 10, 2023 ~May 12, 2023	Oct. 11, 2023	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2023	Apr. 10, 2023 ~May 12, 2023	Jan. 04, 2024	Conducted (TH01-KS)
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	Apr. 06, 2022	Mar. 31, 2023 ~May 18, 2023	Apr. 05, 2023	Radiation (03CH03-SZ)
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	Apr. 04, 2023		Apr. 03, 2024	Radiation (03CH03-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150246	10Hz~44GHz;	Apr. 06, 2022	Mar. 31, 2023 ~May 18, 2023	Apr. 05, 2023	Radiation (03CH03-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150246	10Hz~44GHz;	Apr. 04, 2023		Apr. 03, 2024	Radiation (03CH03-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jul. 28, 2022	Mar. 31, 2023 ~May 18, 2023	Jul. 27, 2024	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz-2GHz	Aug. 09, 2021	Mar. 31, 2023 ~May 18, 2023	Aug. 08, 2023	Radiation (03CH03-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1355	1GHz~18GHz	Apr. 08, 2022	Mar. 31, 2023 ~May 18, 2023	Apr. 07, 2023	Radiation (03CH03-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1355	1GHz~18GHz	Apr. 08, 2023		Apr. 07, 2024	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 06, 2022	Mar. 31, 2023 ~May 18, 2023	Jul.05, 2023	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz-40GHz	Apr. 10, 2022	Mar. 31, 2023 ~May 18, 2023	Apr. 09, 2023	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz-40GHz	Apr. 08, 2023		Apr. 07, 2024	Radiation (03CH03-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz~3000MHz	Oct. 19, 2022	Mar. 31, 2023 ~May 18, 2023	Oct. 18, 2023	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 19, 2022	Mar. 31, 2023 ~May 18, 2023	Oct. 18, 2023	Radiation (03CH03-SZ)
Amplifier	Agilent Technologies	83017A	MY39501302	500MHz~26.5GHz	Dec. 26, 2022	Mar. 31, 2023 ~May 18, 2023	Dec. 25, 2023	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	616010002729	1 N/A	Nov. 10, 2022	Mar. 31, 2023 ~May 18, 2023	Nov. 09, 2023	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Mar. 31, 2023 ~May 18, 2023	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Mar. 31, 2023 ~May 18, 2023	NCR	Radiation (03CH03-SZ)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 24, 2022	Apr. 19, 2023	May 23, 2023	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2022	Apr. 19, 2023	Oct. 12, 2023	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 24, 2022	Apr. 19, 2023	May 23, 2023	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2022	Apr. 19, 2023	Oct. 11, 2023	Conduction (CO01-KS)

NCR: No Calibration Required



5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±0.46 dB
Conducted Emissions	±0.48 dB
Occupied Channel Bandwidth	±0.001 %
Conducted Power Spectral Density	±0.40 dB

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.94dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.9dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

----- THE END -----



Appendix A. Conducted Test Results

A1. Conducted Test Results

Test Engineer:	Albert shi	Temperature:	21~25	°C
Test Date:	023/4/10~2023/5/12	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band Single Antenna								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
					Ant1	Ant1		
11b	1Mbps	1	1	2412	11.940	9.54	0.50	Pass
11b	1Mbps	1	6	2437	12.040	10.04	0.50	Pass
11b	1Mbps	1	11	2462	11.840	9.06	0.50	Pass
11g	6Mbps	1	1	2412	16.630	15.74	0.50	Pass
11g	6Mbps	1	2	2417	16.983	16.32	0.50	Pass
11g	6Mbps	1	6	2437	19.080	16.06	0.50	Pass
11g	6Mbps	1	11	2462	16.930	16.32	0.50	Pass
HT20	MCS0	1	1	2412	17.530	16.58	0.50	Pass
HT20	MCS0	1	2	2417	17.882	17.26	0.50	Pass
HT20	MCS0	1	6	2437	20.280	16.88	0.50	Pass
HT20	MCS0	1	10	2457	17.882	17.24	0.50	Pass
HT20	MCS0	1	11	2462	17.830	17.42	0.50	Pass

TEST RESULTS DATA
Peak Output Power

2.4GHz Band Single Antenna											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)		Conduct ed Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant1	SUM	Ant1	Ant1	Ant1		
11b	1Mbps	1	1	2412	22.58		30.00	-3.00	19.58	36.00	Pass
11b	1Mbps	1	6	2437	22.63		30.00	-3.00	19.63	36.00	Pass
11b	1Mbps	1	11	2462	22.30		30.00	-3.00	19.30	36.00	Pass
11g	6Mbps	1	1	2412	20.23		30.00	-3.00	17.23	36.00	Pass
11g	6Mbps	1	2	2417	24.17		30.00	-3.00	21.17	36.00	Pass
11g	6Mbps	1	6	2437	24.95		30.00	-3.00	21.95	36.00	Pass
11g	6Mbps	1	11	2462	23.58		30.00	-3.00	20.58	36.00	Pass
HT20	MCS0	1	1	2412	20.25		30.00	-3.00	17.25	36.00	Pass
HT20	MCS0	1	2	2417	24.15		30.00	-3.00	21.15	36.00	Pass
HT20	MCS0	1	6	2437	24.92		30.00	-3.00	21.92	36.00	Pass
HT20	MCS0	1	10	2457	24.51		30.00	-3.00	21.51	36.00	Pass
HT20	MCS0	1	11	2462	22.86		30.00	-3.00	19.86	36.00	Pass

TEST RESULTS DATA
Average Output Power

2.4GHz Band Single Antenna												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power with duty factor		Conducted Power Limit	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant 1	Ant1					
11b	1Mbps	1	1	2412	0.11	19.24		30.00	-3.00	16.24	36.00	Pass
11b	1Mbps	1	6	2437	0.11	19.23		30.00	-3.00	16.23	36.00	Pass
11b	1Mbps	1	11	2462	0.11	18.87		30.00	-3.00	15.87	36.00	Pass
11g	6Mbps	1	1	2412	0.58	12.97		30.00	-3.00	9.97	36.00	Pass
11g	6Mbps	1	2	2417	0.58	17.33		30.00	-3.00	14.33	36.00	Pass
11g	6Mbps	1	6	2437	0.58	19.46		30.00	-3.00	16.46	36.00	Pass
11g	6Mbps	1	11	2462	0.58	16.70		30.00	-3.00	13.70	36.00	Pass
HT20	MCS0	1	1	2412	0.61	12.94		30.00	-3.00	9.94	36.00	Pass
HT20	MCS0	1	2	2417	0.61	17.37		30.00	-3.00	14.37	36.00	Pass
HT20	MCS0	1	6	2437	0.61	19.54		30.00	-3.00	16.54	36.00	Pass
HT20	MCS0	1	10	2457	0.61	17.86		30.00	-3.00	14.86	36.00	Pass
HT20	MCS0	1	11	2462	0.61	15.66		30.00	-3.00	12.66	36.00	Pass


TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band Single Antenna									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)		DG (dBi)	Peak PSD Limit (dBm/3kHz)	Pass/Fail
					Ant1	Worse + 3.01			
11b	1Mbps	1	1	2412	-1.35		-3.00	8.00	Pass
11b	1Mbps	1	6	2437	-1.27		-3.00	8.00	Pass
11b	1Mbps	1	11	2462	-1.95		-3.00	8.00	Pass
11g	6Mbps	1	1	2412	-12.88		-3.00	8.00	Pass
11g	6Mbps	1	2	2417	-8.96		-3.00	8.00	Pass
11g	6Mbps	1	6	2437	-6.36		-3.00	8.00	Pass
11g	6Mbps	1	11	2462	-9.30		-3.00	8.00	Pass
HT20	MCS0	1	1	2412	-12.63		-3.00	8.00	Pass
HT20	MCS0	1	2	2417	-8.96		-3.00	8.00	Pass
HT20	MCS0	1	6	2437	-5.62		-3.00	8.00	Pass
HT20	MCS0	1	10	2457	-8.03		-3.00	8.00	Pass
HT20	MCS0	1	11	2462	-10.09		-3.00	8.00	Pass



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

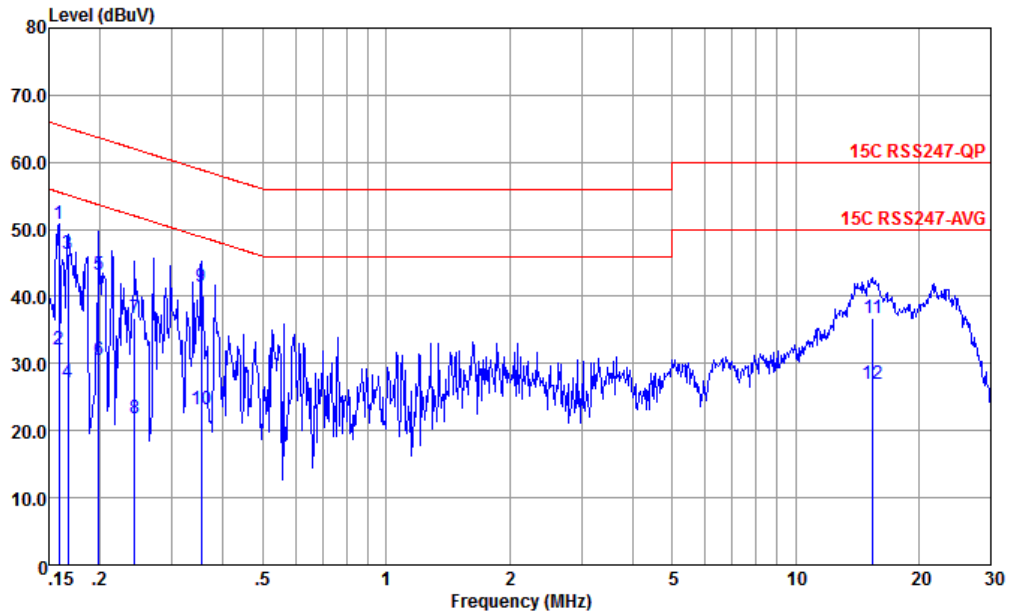


Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-LINE LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1 *	0.159	50.72	-14.80	65.52	40.20	0.06	10.46	QP
2	0.159	32.02	-23.50	55.52	21.50	0.06	10.46	Average
3	0.167	46.29	-18.83	65.12	35.80	0.05	10.44	QP
4	0.167	27.09	-28.03	55.12	16.60	0.05	10.44	Average
5	0.199	43.19	-20.48	63.67	32.80	0.02	10.37	QP
6	0.199	30.59	-23.08	53.67	20.20	0.02	10.37	Average
7	0.243	36.88	-25.12	62.00	26.50	0.04	10.34	QP
8	0.243	21.88	-30.12	52.00	11.50	0.04	10.34	Average
9	0.354	41.41	-17.46	58.87	31.10	0.03	10.28	QP
10	0.354	23.11	-25.76	48.87	12.80	0.03	10.28	Average
11	15.470	36.78	-23.22	60.00	26.60	-0.22	10.40	QP
12	15.470	26.98	-23.02	50.00	16.80	-0.22	10.40	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

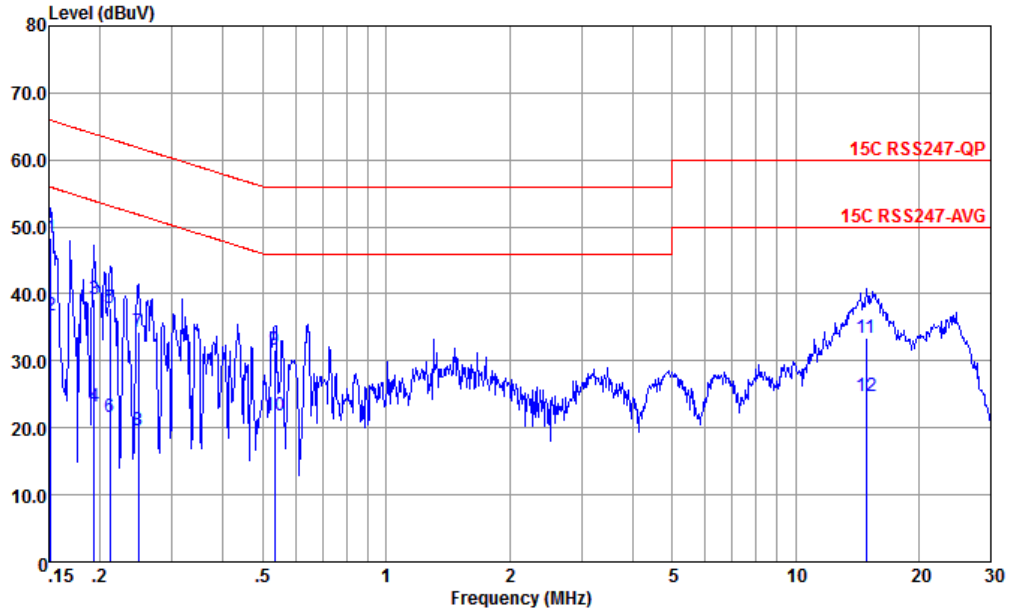

Site : CO01-KS
 Condition : 15C RSS247-QP LISN-060105-NEUTRAL NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 *	0.152	48.31	-17.60	65.91	37.80	0.03	10.48	QP
2	0.152	36.81	-19.10	55.91	26.30	0.03	10.48	Average
3	0.193	39.33	-24.56	63.89	28.90	0.05	10.38	QP
4	0.193	23.23	-30.66	53.89	12.80	0.05	10.38	Average
5	0.212	37.89	-25.25	63.14	27.49	0.04	10.36	QP
6	0.212	21.59	-31.55	53.14	11.19	0.04	10.36	Average
7	0.248	34.23	-27.59	61.82	23.90	0.00	10.33	QP
8	0.248	19.63	-32.19	51.82	9.30	0.00	10.33	Average
9	0.535	31.65	-24.35	56.00	21.49	-0.08	10.24	QP
10	0.535	21.75	-24.25	46.00	11.59	-0.08	10.24	Average
11	14.907	33.41	-26.59	60.00	23.20	-0.18	10.39	QP
12	14.907	24.81	-25.19	50.00	14.60	-0.18	10.39	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	HuaCong Liang	Relative Humidity :	50%
		Temperature :	20~22°C

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	802.11b	01	2412	1Mbps	-	-
Mode 2	2400-2483.5	802.11b	06	2437	1Mbps	-	-
Mode 3	2400-2483.5	802.11b	11	2462	1Mbps	-	-
Mode 4	2400-2483.5	802.11g	01	2412	6Mbps	-	-
Mode 5	2400-2483.5	802.11g	06	2437	6Mbps	-	-
Mode 6	2400-2483.5	802.11g	11	2462	6Mbps	-	-
Mode 7	2400-2483.5	802.11n HT20	01	2412	MCS0	-	-
Mode 8	2400-2483.5	802.11n HT20	06	2437	MCS0	-	-
Mode 9	2400-2483.5	802.11n HT20	11	2462	MCS0	-	-
Mode 10	2400-2483.5	802.11g	02	2417	6Mbps	-	-
Mode 11	2400-2483.5	802.11n HT20	02	2417	MCS0	-	-
Mode 12	2400-2483.5	802.11n HT20	10	2457	MCS0	-	-
Mode 13	2400-2483.5	802.11g	11	2462	6Mbps	-	LF



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11b	01	2389.30	43.06	54.00	-10.94	H	AVERAGE	Pass	Band Edge
	802.11b	01	4824.00	48.98	54.00	-5.02	V	Average	Pass	Harmonic
2	802.11b	06	2498.43	40.70	54.00	-13.30	H	AVERAGE	Pass	Band Edge
	802.11b	06	4874.00	50.02	54.00	-3.98	V	Average	Pass	Harmonic
3	802.11b	11	2483.62	43.91	54.00	-10.10	V	AVERAGE	Pass	Band Edge
	802.11b	11	4924.00	49.02	54.00	-4.98	V	Average	Pass	Harmonic
4	802.11g	01	2389.95	44.72	54.00	-9.28	V	AVERAGE	Pass	Band Edge
	802.11g	01	4824.00	43.78	74.00	-30.22	H	Peak	Pass	Harmonic
5	802.11g	06	2483.94	41.81	54.00	-12.19	H	AVERAGE	Pass	Band Edge
	802.11g	06	7311.00	45.99	74.00	-28.01	H	Peak	Pass	Harmonic
6	802.11g	11	2483.70	50.26	54.00	-3.74	H	AVERAGE	Pass	Band Edge
	802.11g	11	4924.00	44.74	74.00	-29.26	V	Peak	Pass	Harmonic
7	802.11n HT20	01	2389.95	46.09	54.00	-7.91	V	AVERAGE	Pass	Band Edge
	802.11n HT20	01	4824.00	43.29	74.00	-30.71	V	Peak	Pass	Harmonic
8	802.11n HT20	06	2483.94	41.71	54.00	-12.29	V	AVERAGE	Pass	Band Edge
	802.11n HT20	06	7311.00	46.21	74.00	-27.79	V	Peak	Pass	Harmonic
9	802.11n HT20	11	2483.66	69.69	74.00	-4.31	H	PEAK	Pass	Band Edge
	802.11n HT20	11	7386.00	45.35	74.00	-28.65	V	Peak	Pass	Harmonic
10	802.11g	02	2388.91	46.35	54.00	-7.65	H	AVERAGE	Pass	Band Edge
	802.11g	02	-	-	-	-	-	-	-	Harmonic
11	802.11n HT20	02	2389.56	46.75	54.00	-7.25	H	AVERAGE	Pass	Band Edge
	802.11n HT20	02	-	-	-	-	-	-	-	Harmonic
12	802.11n HT20	10	2483.55	47.31	54.00	-6.69	V	AVERAGE	Pass	Band Edge
	802.11n HT20	10	-	-	-	-	-	-	-	Harmonic
13	802.11g	11	262.8	35.08	46.00	-10.92	V	Peak	Pass	LF



Co-location

2.4GHz 2400~2483.5MHz

802.11g CH11 2462MHz+Band13 (Band Edge @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 11 2462MHz & Band13 Co-location	*	2462	105.53	-	-	101.79	32.4	4.97	33.63	130	126	P	H
	*	2462	97.72	-	-	93.98	32.4	4.97	33.63	130	126	A	H
		2483.8	65.3	-8.7	74	61.47	32.46	4.99	33.62	130	126	P	H
		2483.52	49.8	-4.2	54	45.97	32.46	4.99	33.62	130	126	A	H
	*	2462	101.63	-	-	97.89	32.4	4.97	33.63	104	39	P	V
	*	2462	93.7	-	-	89.96	32.4	4.97	33.63	104	39	A	V
		2483.84	61.19	-12.81	74	57.36	32.46	4.99	33.62	104	39	P	V
		2483.52	46.57	-7.43	54	42.74	32.46	4.99	33.62	104	39	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 11 2462MHz & Band13 Co-location		4924	44.06	-29.94	74	54.41	34.63	7.8	52.78	-	-	P	H
		7386	43.71	-30.29	74	52.09	36.49	9.2	54.07	-	-	P	H
		4924	44.96	-29.04	74	55.31	34.63	7.8	52.78	-	-	P	V
		7386	45.01	-28.99	74	53.39	36.49	9.2	54.07	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Mode	1																																																																											
	Band Edge																																																																											
	2400-2483.5_802.11b_CH01_2412MHz																																																																											
ANT	1																																																																											
Pol.	Horizontal	Fundamental																																																																										
Peak	<p>Site : 03CH03-SZ Condition: PEAK_BE_74_3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 10 Setting : 1M Power setting 17 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.39</td> <td>54.13</td> <td>74.00</td> <td>-19.87</td> <td>50.80</td> <td>32.21</td> <td>4.79</td> <td>33.67</td> <td>400</td> <td>168</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2388.39	54.13	74.00	-19.87	50.80	32.21	4.79	33.67	400	168	PEAK	<p>Site : 03CH03-SZ Condition: PEAK_74_3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 10 Setting : 1M Power setting 17 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>103.73</td> <td>-----</td> <td>100.29</td> <td>32.27</td> <td>4.82</td> <td>33.65</td> <td>400</td> <td>168</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	103.73	-----	100.29	32.27	4.82	33.65	400	168	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																					
1	2388.39	54.13	74.00	-19.87	50.80	32.21	4.79	33.67	400	168	PEAK																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	2412.00	103.73	-----	100.29	32.27	4.82	33.65	400	168	PEAK																																																																		
Avg	<p>Site : 03CH03-SZ Condition: AVG_BE_54_3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz Mode : 10 Setting : 1M Power setting 17 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.30</td> <td>43.06</td> <td>54.00</td> <td>-10.94</td> <td>39.73</td> <td>32.21</td> <td>4.79</td> <td>33.67</td> <td>400</td> <td>168</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2389.30	43.06	54.00	-10.94	39.73	32.21	4.79	33.67	400	168	AVERAGE	<p>Site : 03CH03-SZ Condition: AVG_54_3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz Mode : 10 Setting : 1M Power setting 17 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>99.18</td> <td>-----</td> <td>95.75</td> <td>32.27</td> <td>4.82</td> <td>33.66</td> <td>400</td> <td>168</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	99.18	-----	95.75	32.27	4.82	33.66	400	168	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																					
1	2389.30	43.06	54.00	-10.94	39.73	32.21	4.79	33.67	400	168	AVERAGE																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	2412.00	99.18	-----	95.75	32.27	4.82	33.66	400	168	AVERAGE																																																																		



1																															
Mode	Band Edge																														
	2400-2483.5_802.11b_CH01_2412MHz																														
ANT	1																														
Pol.	Vertical																														
Peak	<p style="text-align: right;">Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PEAK_BE_74_3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 10 Setting : 1M Power setting 17 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.82</td> <td>54.38</td> <td>74.00</td> <td>-19.62</td> <td>51.04</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>182</td> <td>161</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	dB	cm	deg	1	2389.82	54.38	74.00	-19.62	51.04	32.21	4.80	33.67	182	161	PEAK
	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																								
Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	dB	cm	deg																					
1	2389.82	54.38	74.00	-19.62	51.04	32.21	4.80	33.67	182	161	PEAK																				
<p style="text-align: right;">Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PEAK_74_3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 10 Setting : 1M Power setting 17 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>105.48</td> <td>-----</td> <td>-----</td> <td>102.03</td> <td>32.28</td> <td>4.82</td> <td>33.65</td> <td>182</td> <td>161</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	dB	cm	deg	1	2412.00	105.48	-----	-----	102.03	32.28	4.82	33.65	182	161	PEAK
Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																								
Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	dB	cm	deg																					
1	2412.00	105.48	-----	-----	102.03	32.28	4.82	33.65	182	161	PEAK																				
Avg	<p style="text-align: right;">Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: AVG_BE_54_3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.300kHz Mode : 10 Setting : 1M Power setting 17 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.17</td> <td>43.00</td> <td>54.00</td> <td>-11.00</td> <td>39.67</td> <td>32.21</td> <td>4.79</td> <td>33.67</td> <td>182</td> <td>161</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	dB	cm	deg	1	2389.17	43.00	54.00	-11.00	39.67	32.21	4.79	33.67	182	161	AVERAGE
	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																								
Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	dB	cm	deg																					
1	2389.17	43.00	54.00	-11.00	39.67	32.21	4.79	33.67	182	161	AVERAGE																				
<p style="text-align: right;">Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: AVG_54_3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.300kHz Mode : 10 Setting : 1M Power setting 17 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>100.69</td> <td>-----</td> <td>-----</td> <td>97.24</td> <td>32.28</td> <td>4.82</td> <td>33.65</td> <td>182</td> <td>161</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	dB	cm	deg	1	2412.00	100.69	-----	-----	97.24	32.28	4.82	33.65	182	161	AVERAGE
Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																								
Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	dB	cm	deg																					
1	2412.00	100.69	-----	-----	97.24	32.28	4.82	33.65	182	161	AVERAGE																				



Mode	1																																																																																																	
	Harmonic																																																																																																	
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																	
ANT	1																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 HORIZONTAL Mode : 10 Setting : 1M Power setting 17 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>51.09</td> <td>74.00</td> <td>-22.91</td> <td>61.58</td> <td>34.67</td> <td>7.75</td> <td>52.91</td> <td>198</td> <td>60</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4824.00</td> <td>46.41</td> <td>54.00</td> <td>-7.59</td> <td>56.90</td> <td>34.67</td> <td>7.75</td> <td>52.91</td> <td>198</td> <td>60</td> <td>Average</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	cm	deg		1	4824.00	51.09	74.00	-22.91	61.58	34.67	7.75	52.91	198	60	Peak	2	4824.00	46.41	54.00	-7.59	56.90	34.67	7.75	52.91	198	60	Average	<p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 VERTICAL Mode : 10 Setting : 1M Power setting 17 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>52.83</td> <td>74.00</td> <td>-21.17</td> <td>63.32</td> <td>34.67</td> <td>7.75</td> <td>52.91</td> <td>150</td> <td>343</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4824.00</td> <td>48.98</td> <td>54.00</td> <td>-5.02</td> <td>59.47</td> <td>34.67</td> <td>7.75</td> <td>52.91</td> <td>150</td> <td>343</td> <td>Average</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	cm	deg		1	4824.00	52.83	74.00	-21.17	63.32	34.67	7.75	52.91	150	343	Peak	2	4824.00	48.98	54.00	-5.02	59.47	34.67	7.75	52.91	150	343	Average
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	4824.00	51.09	74.00	-22.91	61.58	34.67	7.75	52.91	198	60	Peak																																																																																							
2	4824.00	46.41	54.00	-7.59	56.90	34.67	7.75	52.91	198	60	Average																																																																																							
Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	4824.00	52.83	74.00	-21.17	63.32	34.67	7.75	52.91	150	343	Peak																																																																																							
2	4824.00	48.98	54.00	-5.02	59.47	34.67	7.75	52.91	150	343	Average																																																																																							



		2																																																																						
Mode	Band Edge - L																																																																							
	2400-2483.5_802.11b_CH06_2437MHz																																																																							
ANT	1																																																																							
Pol.	Horizontal	Fundamental																																																																						
Peak	<p>Site : 03CH03-SZ Condition: PEAK_BE_74_3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 11 Setting : 1M Power setting 19 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2326.00</td> <td>53.09</td> <td>74.00</td> <td>-20.91</td> <td>50.02</td> <td>32.05</td> <td>4.73</td> <td>33.71</td> <td>400</td> <td>29</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2326.00	53.09	74.00	-20.91	50.02	32.05	4.73	33.71	400	29	PEAK	<p>Site : 03CH03-SZ Condition: PEAK_74_3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 11 Setting : 1M Power setting 19 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>101.04</td> <td>-----</td> <td>97.50</td> <td>32.33</td> <td>4.85</td> <td>33.64</td> <td>400</td> <td>29</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	101.04	-----	97.50	32.33	4.85	33.64	400	29	PEAK
	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																
1	2326.00	53.09	74.00	-20.91	50.02	32.05	4.73	33.71	400	29	PEAK																																																													
Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																
1	2437.00	101.04	-----	97.50	32.33	4.85	33.64	400	29	PEAK																																																														
Avg	<p>Site : 03CH03-SZ Condition: AVG_BE_54_3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz Mode : 11 Setting : 1M Power setting 19 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.12</td> <td>40.24</td> <td>54.00</td> <td>-13.76</td> <td>36.91</td> <td>32.21</td> <td>4.79</td> <td>33.67</td> <td>400</td> <td>29</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.12	40.24	54.00	-13.76	36.91	32.21	4.79	33.67	400	29	AVERAGE	<p>Site : 03CH03-SZ Condition: AVG_54_3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz Mode : 11 Setting : 1M Power setting 19 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>96.45</td> <td>-----</td> <td>92.91</td> <td>32.33</td> <td>4.85</td> <td>33.64</td> <td>400</td> <td>29</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	96.45	-----	92.91	32.33	4.85	33.64	400	29	AVERAGE
Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																
1	2389.12	40.24	54.00	-13.76	36.91	32.21	4.79	33.67	400	29	AVERAGE																																																													
Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																
1	2437.00	96.45	-----	92.91	32.33	4.85	33.64	400	29	AVERAGE																																																														



Mode	2																																					
	Band Edge - R																																					
	2400-2483.5_802.11b_CH06_2437MHz																																					
ANT	1																																					
Pol.	Horizontal	Fundamental																																				
Peak	<p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 11 Setting : 1M Power setting 19 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.44</td> <td>53.93</td> <td>74.00</td> <td>-20.07</td> <td>50.16</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>400</td> <td>29</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1	2484.44	53.93	74.00	-20.07	50.16	32.46	4.92	33.61	400	29	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																															
1	2484.44	53.93	74.00	-20.07	50.16	32.46	4.92	33.61	400	29	PEAK																											
Avg	<p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz Mode : 11 Setting : 1M Power setting 19 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2498.43</td> <td>40.70</td> <td>54.00</td> <td>-13.30</td> <td>36.86</td> <td>32.50</td> <td>4.94</td> <td>33.60</td> <td>400</td> <td>29</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1	2498.43	40.70	54.00	-13.30	36.86	32.50	4.94	33.60	400	29	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																															
1	2498.43	40.70	54.00	-13.30	36.86	32.50	4.94	33.60	400	29	AVERAGE																											



		2																																																																						
Mode	Band Edge - L																																																																							
	2400-2483.5_802.11b_CH06_2437MHz																																																																							
ANT	1																																																																							
Pol.	Vertical	Fundamental																																																																						
Peak	<p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 11 Setting : 1M Power setting 19 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2387.22</td> <td>53.11</td> <td>74.00</td> <td>-20.89</td> <td>49.78</td> <td>32.21</td> <td>4.79</td> <td>33.67</td> <td>200</td> <td>15</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2387.22	53.11	74.00	-20.89	49.78	32.21	4.79	33.67	200	15	PEAK	<p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 11 Setting : 1M Power setting 19 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>102.18</td> <td>-----</td> <td>98.64</td> <td>32.33</td> <td>4.85</td> <td>33.64</td> <td>200</td> <td>15</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	102.18	-----	98.64	32.33	4.85	33.64	200	15	PEAK
	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																
1	2387.22	53.11	74.00	-20.89	49.78	32.21	4.79	33.67	200	15	PEAK																																																													
Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																
1	2437.00	102.18	-----	98.64	32.33	4.85	33.64	200	15	PEAK																																																														
Avg	<p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.300kHz Mode : 11 Setting : 1M Power setting 19 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2385.44</td> <td>40.13</td> <td>54.00</td> <td>-13.87</td> <td>36.81</td> <td>32.20</td> <td>4.79</td> <td>33.67</td> <td>200</td> <td>15</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2385.44	40.13	54.00	-13.87	36.81	32.20	4.79	33.67	200	15	AVERAGE	<p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: AVG_54 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.300kHz Mode : 11 Setting : 1M Power setting 19 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>97.66</td> <td>-----</td> <td>94.10</td> <td>32.34</td> <td>4.86</td> <td>33.64</td> <td>200</td> <td>15</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	97.66	-----	94.10	32.34	4.86	33.64	200	15	AVERAGE
Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																
1	2385.44	40.13	54.00	-13.87	36.81	32.20	4.79	33.67	200	15	AVERAGE																																																													
Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																
1	2437.00	97.66	-----	94.10	32.34	4.86	33.64	200	15	AVERAGE																																																														



Mode	2																																													
	Band Edge - R																																													
	2400-2483.5_802.11b_CH06_2437MHz																																													
ANT	1																																													
Pol.	Vertical	Fundamental																																												
Peak	<p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 11 Setting : 1M Power setting 19 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2489.67</td> <td>53.25</td> <td>74.00</td> <td>-20.75</td> <td>49.46</td> <td>32.47</td> <td>4.93</td> <td>33.61</td> <td>200</td> <td>15</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB							cm	deg	1	2489.67	53.25	74.00	-20.75	49.46	32.47	4.93	33.61	200	15	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																																							
						cm	deg																																							
1	2489.67	53.25	74.00	-20.75	49.46	32.47	4.93	33.61	200	15	PEAK																																			
Avg	<p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.300kHz Mode : 11 Setting : 1M Power setting 19 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2494.96</td> <td>40.61</td> <td>54.00</td> <td>-13.39</td> <td>36.78</td> <td>32.49</td> <td>4.94</td> <td>33.60</td> <td>200</td> <td>15</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB							cm	deg	1	2494.96	40.61	54.00	-13.39	36.78	32.49	4.94	33.60	200	15	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																																							
						cm	deg																																							
1	2494.96	40.61	54.00	-13.39	36.78	32.49	4.94	33.60	200	15	AVERAGE																																			







Mode	2																																																																																																									
	Harmonic																																																																																																									
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																									
ANT	1																																																																																																									
Pol.	Horizontal	Vertical																																																																																																								
Peak Avg	<p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 HORIZONTAL Mode : 11 Setting : 1M Power setting 19 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th rowspan="2">Level</th> <th colspan="2">Limit</th> <th rowspan="2">Read Level</th> <th rowspan="2">Ant Factor</th> <th rowspan="2">Cable Loss</th> <th rowspan="2">Preamp</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>50.60</td> <td>74.00</td> <td>-23.40</td> <td>61.03</td> <td>34.65</td> <td>7.77</td> <td>52.85</td> <td>170</td> <td>59 Peak</td> </tr> <tr> <td>2</td> <td>4874.00</td> <td>46.96</td> <td>54.00</td> <td>-7.04</td> <td>57.39</td> <td>34.65</td> <td>7.77</td> <td>52.85</td> <td>170</td> <td>59 Average</td> </tr> <tr> <td>3</td> <td>7311.00</td> <td>45.32</td> <td>74.00</td> <td>-28.68</td> <td>54.09</td> <td>36.41</td> <td>8.93</td> <td>54.11</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Limit		Read Level	Ant Factor	Cable Loss	Preamp	APos	TPos	Remark	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	4874.00	50.60	74.00	-23.40	61.03	34.65	7.77	52.85	170	59 Peak	2	4874.00	46.96	54.00	-7.04	57.39	34.65	7.77	52.85	170	59 Average	3	7311.00	45.32	74.00	-28.68	54.09	36.41	8.93	54.11	---	Peak	<p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 VERTICAL Mode : 11 Setting : 1M Power setting 19 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th rowspan="2">Level</th> <th colspan="2">Limit</th> <th rowspan="2">Read Level</th> <th rowspan="2">Ant Factor</th> <th rowspan="2">Cable Loss</th> <th rowspan="2">Preamp</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>53.19</td> <td>74.00</td> <td>-20.81</td> <td>63.62</td> <td>34.65</td> <td>7.77</td> <td>52.85</td> <td>143</td> <td>344 Peak</td> </tr> <tr> <td>2</td> <td>4874.00</td> <td>50.02</td> <td>54.00</td> <td>-3.98</td> <td>60.45</td> <td>34.65</td> <td>7.77</td> <td>52.85</td> <td>143</td> <td>344 Average</td> </tr> <tr> <td>3</td> <td>7311.00</td> <td>45.12</td> <td>74.00</td> <td>-28.88</td> <td>53.89</td> <td>36.41</td> <td>8.93</td> <td>54.11</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Limit		Read Level	Ant Factor	Cable Loss	Preamp	APos	TPos	Remark	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	4874.00	53.19	74.00	-20.81	63.62	34.65	7.77	52.85	143	344 Peak	2	4874.00	50.02	54.00	-3.98	60.45	34.65	7.77	52.85	143	344 Average	3	7311.00	45.12	74.00	-28.88	53.89	36.41	8.93	54.11	---	Peak
	Freq			Level	Limit								Read Level	Ant Factor	Cable Loss	Preamp	APos	TPos	Remark																																																																																							
dBuV/m		dBuV/m	dB		dB/m	dB	dB	cm	deg																																																																																																	
1	4874.00	50.60	74.00	-23.40	61.03	34.65	7.77	52.85	170	59 Peak																																																																																																
2	4874.00	46.96	54.00	-7.04	57.39	34.65	7.77	52.85	170	59 Average																																																																																																
3	7311.00	45.32	74.00	-28.68	54.09	36.41	8.93	54.11	---	Peak																																																																																																
Freq	Level	Limit		Read Level	Ant Factor	Cable Loss	Preamp	APos	TPos	Remark																																																																																																
		dBuV/m	dBuV/m								dB	dB/m	dB	dB	cm	deg																																																																																										
1	4874.00	53.19	74.00	-20.81	63.62	34.65	7.77	52.85	143	344 Peak																																																																																																
2	4874.00	50.02	54.00	-3.98	60.45	34.65	7.77	52.85	143	344 Average																																																																																																
3	7311.00	45.12	74.00	-28.88	53.89	36.41	8.93	54.11	---	Peak																																																																																																



3																																						
Mode	Band Edge																																					
2400-2483.5_802.11b_CH11_2462MHz																																						
ANT	1																																					
Pol.	Horizontal																																					
Peak	<div style="display: flex; justify-content: space-between;"> <div style="width: 48%;"> <p style="text-align: right;">Date: 2023-05-05</p> <p style="text-align: right;">PEAK_BE_74</p> </div> <div style="width: 48%;"> <p style="text-align: right;">Date: 2023-05-05</p> <p style="text-align: right;">PEAK_74</p> </div> </div> <div style="margin-top: 10px;"> <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 12 Setting : 1M Power setting 18 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1" style="width: 100%; border-collapse: collapse; font-size: 8px;"> <thead> <tr> <th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr> </thead> <tbody> <tr> <td>1</td><td>2483.89</td><td>55.32</td><td>74.00</td><td>-18.68</td><td>51.55</td><td>32.46</td><td>4.92</td><td>33.61</td><td>118</td><td>40</td><td>PEAK</td></tr> </tbody> </table> </div>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.89	55.32	74.00	-18.68	51.55	32.46	4.92	33.61	118	40	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																														
1	2483.89	55.32	74.00	-18.68	51.55	32.46	4.92	33.61	118	40	PEAK																											
Avg	<div style="display: flex; justify-content: space-between;"> <div style="width: 48%;"> <p style="text-align: right;">Date: 2023-05-05</p> <p style="text-align: right;">AVG_BE_54</p> </div> <div style="width: 48%;"> <p style="text-align: right;">Date: 2023-05-05</p> <p style="text-align: right;">AVG_54</p> </div> </div> <div style="margin-top: 10px;"> <p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz Mode : 12 Setting : 1M Power setting 18 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1" style="width: 100%; border-collapse: collapse; font-size: 8px;"> <thead> <tr> <th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr> </thead> <tbody> <tr> <td>1</td><td>2483.51</td><td>43.90</td><td>54.00</td><td>-10.10</td><td>40.13</td><td>32.46</td><td>4.92</td><td>33.61</td><td>118</td><td>40</td><td>AVERAGE</td></tr> </tbody> </table> </div>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	43.90	54.00	-10.10	40.13	32.46	4.92	33.61	118	40	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																														
1	2483.51	43.90	54.00	-10.10	40.13	32.46	4.92	33.61	118	40	AVERAGE																											

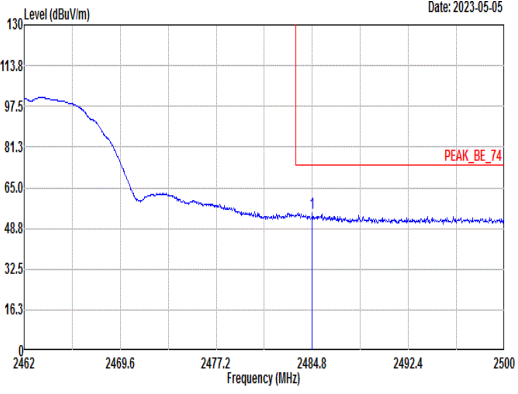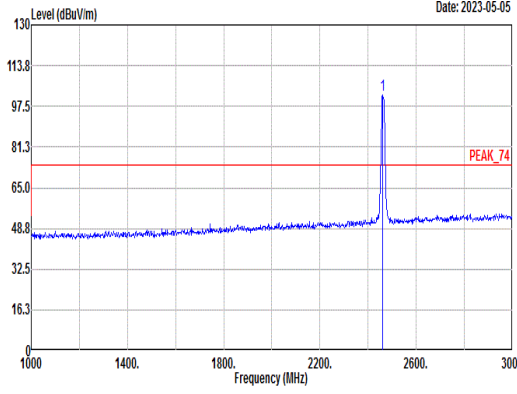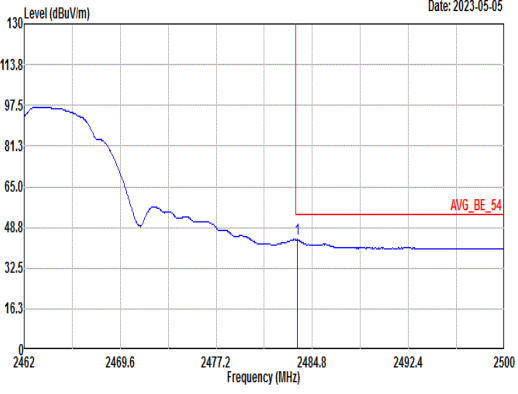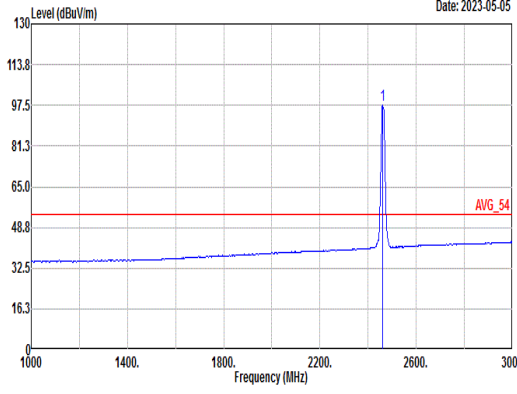

3																																						
Mode	Band Edge																																					
2400-2483.5_802.11b_CH11_2462MHz																																						
ANT	1																																					
Pol.	Vertical																																					
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing a peak at 2484.8 MHz. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 2462 to 2500 MHz. A red horizontal line indicates the peak level at approximately 74 dBuV/m.</p> <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 12 Setting : 1M Power setting 18 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.80</td> <td>54.75</td> <td>74.00</td> <td>-19.25</td> <td>50.98</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>191</td> <td>149</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2484.80	54.75	74.00	-19.25	50.98	32.46	4.92	33.61	191	149	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																														
1	2484.80	54.75	74.00	-19.25	50.98	32.46	4.92	33.61	191	149	PEAK																											
 <p>Level (dBuV/m) vs Frequency (MHz) plot showing a sharp peak at 2462.00 MHz. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 1000 to 3000 MHz. A red horizontal line indicates the peak level at approximately 74 dBuV/m.</p> <p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 12 Setting : 1M Power setting 18 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>102.26</td> <td>-----</td> <td>98.60</td> <td>32.40</td> <td>4.89</td> <td>33.63</td> <td>191</td> <td>149</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	102.26	-----	98.60	32.40	4.89	33.63	191	149	PEAK
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																														
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																														
1	2462.00	102.26	-----	98.60	32.40	4.89	33.63	191	149	PEAK																												
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing an average level at 2483.62 MHz. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 2462 to 2500 MHz. A red horizontal line indicates the average level at approximately 54 dBuV/m.</p> <p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.300kHz Mode : 12 Setting : 1M Power setting 18 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.62</td> <td>43.91</td> <td>54.00</td> <td>-10.09</td> <td>40.14</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>191</td> <td>149</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.62	43.91	54.00	-10.09	40.14	32.46	4.92	33.61	191	149	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																														
1	2483.62	43.91	54.00	-10.09	40.14	32.46	4.92	33.61	191	149	AVERAGE																											
 <p>Level (dBuV/m) vs Frequency (MHz) plot showing an average level at 2462.00 MHz. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 1000 to 3000 MHz. A red horizontal line indicates the average level at approximately 54 dBuV/m.</p> <p>Site : 03CH03-SZ Condition: AVG_54 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.300kHz Mode : 12 Setting : 1M Power setting 18 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>97.47</td> <td>-----</td> <td>93.81</td> <td>32.40</td> <td>4.89</td> <td>33.63</td> <td>191</td> <td>149</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	97.47	-----	93.81	32.40	4.89	33.63	191	149	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																														
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																														
1	2462.00	97.47	-----	93.81	32.40	4.89	33.63	191	149	AVERAGE																												



Mode	3																																																																																																			
	Harmonic																																																																																																			
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Horizontal	Vertical																																																																																																		
Peak Avg	<p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 HORIZONTAL Mode : 12 Setting : 1M Power setting 18 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th rowspan="2">Level</th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable Preamp</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.00</td> <td>50.51</td> <td>74.00</td> <td>-23.49</td> <td>60.88</td> <td>34.63</td> <td>7.79</td> <td>52.79</td> <td>177</td> <td>56 Peak</td> </tr> <tr> <td>2</td> <td>4924.00</td> <td>45.65</td> <td>54.00</td> <td>-8.35</td> <td>56.02</td> <td>34.63</td> <td>7.79</td> <td>52.79</td> <td>177</td> <td>56 Average</td> </tr> <tr> <td>3</td> <td>7386.00</td> <td>45.43</td> <td>74.00</td> <td>-28.57</td> <td>53.84</td> <td>36.49</td> <td>9.17</td> <td>54.07</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Limit		Read		Ant	Cable Preamp	APos	TPos	Remark	dBuV/m	dBuV/m	dB	dBuV	dB/m	1	4924.00	50.51	74.00	-23.49	60.88	34.63	7.79	52.79	177	56 Peak	2	4924.00	45.65	54.00	-8.35	56.02	34.63	7.79	52.79	177	56 Average	3	7386.00	45.43	74.00	-28.57	53.84	36.49	9.17	54.07	---	Peak	<p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 VERTICAL Mode : 12 Setting : 1M Power setting 18 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th rowspan="2">Level</th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable Preamp</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.00</td> <td>52.56</td> <td>74.00</td> <td>-21.44</td> <td>62.93</td> <td>34.63</td> <td>7.79</td> <td>52.79</td> <td>153</td> <td>343 Peak</td> </tr> <tr> <td>2</td> <td>4924.00</td> <td>49.02</td> <td>54.00</td> <td>-4.98</td> <td>59.39</td> <td>34.63</td> <td>7.79</td> <td>52.79</td> <td>153</td> <td>343 Average</td> </tr> <tr> <td>3</td> <td>7386.00</td> <td>45.18</td> <td>74.00</td> <td>-28.82</td> <td>53.59</td> <td>36.49</td> <td>9.17</td> <td>54.07</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Limit		Read		Ant	Cable Preamp	APos	TPos	Remark	dBuV/m	dBuV/m	dB	dBuV	dB/m	1	4924.00	52.56	74.00	-21.44	62.93	34.63	7.79	52.79	153	343 Peak	2	4924.00	49.02	54.00	-4.98	59.39	34.63	7.79	52.79	153	343 Average	3	7386.00	45.18	74.00	-28.82	53.59	36.49	9.17	54.07	---	Peak
	Freq			Level	Limit		Read						Ant	Cable Preamp	APos	TPos	Remark																																																																																			
dBuV/m		dBuV/m	dB		dBuV	dB/m																																																																																														
1	4924.00	50.51	74.00	-23.49	60.88	34.63	7.79	52.79	177	56 Peak																																																																																										
2	4924.00	45.65	54.00	-8.35	56.02	34.63	7.79	52.79	177	56 Average																																																																																										
3	7386.00	45.43	74.00	-28.57	53.84	36.49	9.17	54.07	---	Peak																																																																																										
Freq	Level	Limit		Read		Ant	Cable Preamp	APos	TPos	Remark																																																																																										
		dBuV/m	dBuV/m	dB	dBuV						dB/m																																																																																									
1	4924.00	52.56	74.00	-21.44	62.93	34.63	7.79	52.79	153	343 Peak																																																																																										
2	4924.00	49.02	54.00	-4.98	59.39	34.63	7.79	52.79	153	343 Average																																																																																										
3	7386.00	45.18	74.00	-28.82	53.59	36.49	9.17	54.07	---	Peak																																																																																										



		4																																																																						
Mode	Band Edge																																																																							
	2400-2483.5_802.11g_CH01_2412MHz																																																																							
ANT	1																																																																							
Pol.	Horizontal	Fundamental																																																																						
Peak	<p>Date: 2023-05-04</p> <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 13 Setting : 6M Power setting 10 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.30</td> <td>62.34</td> <td>74.00</td> <td>-11.66</td> <td>59.01</td> <td>32.21</td> <td>4.79</td> <td>33.67</td> <td>400</td> <td>169</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.30	62.34	74.00	-11.66	59.01	32.21	4.79	33.67	400	169	PEAK	<p>Date: 2023-05-04</p> <p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 13 Setting : 6M Power setting 10 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>100.79</td> <td>-----</td> <td>97.33</td> <td>32.28</td> <td>4.83</td> <td>33.65</td> <td>400</td> <td>169</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	100.79	-----	97.33	32.28	4.83	33.65	400	169	PEAK
	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																
1	2389.30	62.34	74.00	-11.66	59.01	32.21	4.79	33.67	400	169	PEAK																																																													
Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																
1	2412.00	100.79	-----	97.33	32.28	4.83	33.65	400	169	PEAK																																																														
Avg	<p>Date: 2023-05-04</p> <p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 13 Setting : 6M Power setting 10 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>44.69</td> <td>54.00</td> <td>-9.31</td> <td>41.35</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>400</td> <td>169</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	44.69	54.00	-9.31	41.35	32.21	4.80	33.67	400	169	AVERAGE	<p>Date: 2023-05-04</p> <p>Site : 03CH03-SZ Condition: AVG_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 13 Setting : 6M Power setting 10 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>91.92</td> <td>-----</td> <td>88.46</td> <td>32.28</td> <td>4.83</td> <td>33.65</td> <td>400</td> <td>169</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	91.92	-----	88.46	32.28	4.83	33.65	400	169	AVERAGE
Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																
1	2389.95	44.69	54.00	-9.31	41.35	32.21	4.80	33.67	400	169	AVERAGE																																																													
Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																
1	2412.00	91.92	-----	88.46	32.28	4.83	33.65	400	169	AVERAGE																																																														







Mode	4																																																													
	Band Edge																																																													
	2400-2483.5_802.11g_CH01_2412MHz																																																													
ANT	1																																																													
Pol.	Vertical	Fundamental																																																												
Peak	<p>Site : 03CH03-SZ Condition: PEAK_BE_74_3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 13 Setting : 6M Power setting 10 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.17</td> <td>62.90</td> <td>74.00</td> <td>-11.10</td> <td>59.57</td> <td>32.21</td> <td>4.79</td> <td>33.67</td> <td>193</td> <td>59</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	dB	cm	deg	1	2389.17	62.90	74.00	-11.10	59.57	32.21	4.79	33.67	193	59	PEAK	<p>Site : 03CH03-SZ Condition: PEAK_74_3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 13 Setting : 6M Power setting 10 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>103.11</td> <td>-----</td> <td>-----</td> <td>99.65</td> <td>32.28</td> <td>4.83</td> <td>33.65</td> <td>193</td> <td>59</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	dB	cm	deg	1	2412.00	103.11	-----	-----	99.65	32.28	4.83	33.65	193	59	PEAK
	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	dB	cm	deg																																																				
1	2389.17	62.90	74.00	-11.10	59.57	32.21	4.79	33.67	193	59	PEAK																																																			
Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																								
Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	dB	cm	deg																																																				
1	2412.00	103.11	-----	-----	99.65	32.28	4.83	33.65	193	59	PEAK																																																			
Avg	<p>Site : 03CH03-SZ Condition: AVG_BE_54_3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 13 Setting : 6M Power setting 10 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>44.72</td> <td>54.00</td> <td>-9.28</td> <td>41.38</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>193</td> <td>59</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	dB	cm	deg	1	2389.95	44.72	54.00	-9.28	41.38	32.21	4.80	33.67	193	59	AVERAGE	<p>Site : 03CH03-SZ Condition: AVG_54_3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 13 Setting : 6M Power setting 10 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>93.59</td> <td>-----</td> <td>-----</td> <td>90.13</td> <td>32.28</td> <td>4.83</td> <td>33.65</td> <td>193</td> <td>59</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	dB	cm	deg	1	2412.00	93.59	-----	-----	90.13	32.28	4.83	33.65	193	59	AVERAGE
Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																								
Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	dB	cm	deg																																																				
1	2389.95	44.72	54.00	-9.28	41.38	32.21	4.80	33.67	193	59	AVERAGE																																																			
Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																								
Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	dB	cm	deg																																																				
1	2412.00	93.59	-----	-----	90.13	32.28	4.83	33.65	193	59	AVERAGE																																																			



Mode	4																																																																											
	Harmonic																																																																											
	2400-2483.5_802.11g_CH01_2412MHz																																																																											
ANT	1																																																																											
Pol.	Horizontal	Vertical																																																																										
Peak Avg	<p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 HORIZONTAL Mode : 13 Setting : 6M Power setting 10 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Peak</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>43.78</td> <td>74.00</td> <td>-30.22</td> <td>54.27</td> <td>34.67</td> <td>7.75</td> <td>52.91</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Peak	1	4824.00	43.78	74.00	-30.22	54.27	34.67	7.75	52.91	---	---	Peak	<p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 VERTICAL Mode : 13 Setting : 6M Power setting 10 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Peak</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>42.63</td> <td>74.00</td> <td>-31.37</td> <td>53.12</td> <td>34.67</td> <td>7.75</td> <td>52.91</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Peak	1	4824.00	42.63	74.00	-31.37	53.12	34.67	7.75	52.91	---	---	Peak
	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Peak																																																																		
1	4824.00	43.78	74.00	-30.22	54.27	34.67	7.75	52.91	---	---	Peak																																																																	
Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Peak																																																																		
1	4824.00	42.63	74.00	-31.37	53.12	34.67	7.75	52.91	---	---	Peak																																																																	

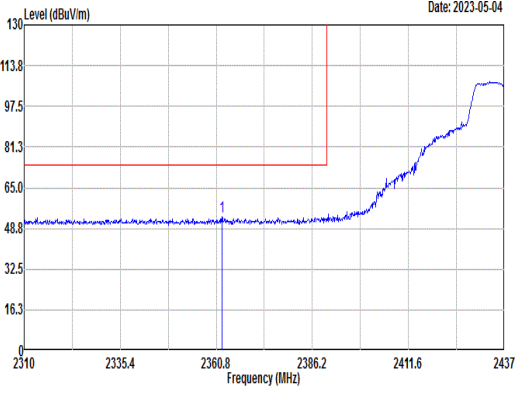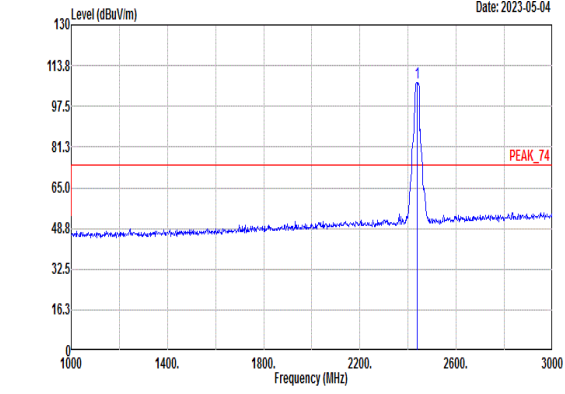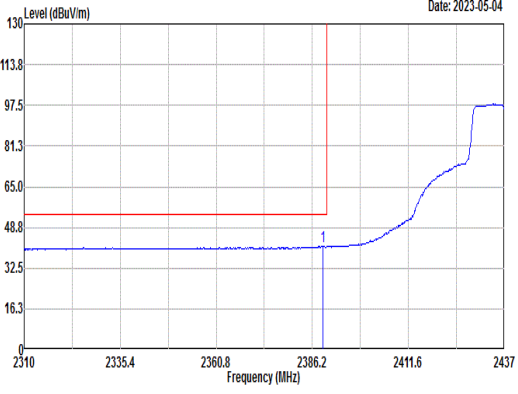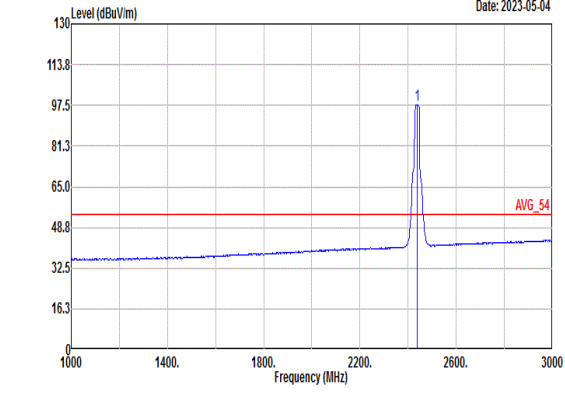

5																																						
Mode	Band Edge - L																																					
2400-2483.5_802.11g_CH06_2437MHz																																						
ANT	1																																					
Pol.	Horizontal																																					
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing a peak at 2362.32 MHz. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 2310 to 2437 MHz. A red horizontal line is drawn at approximately 74 dBuV/m.</p> <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 14 Setting : 6M Power setting 18 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2362.32</td> <td>53.40</td> <td>74.00</td> <td>-20.60</td> <td>50.17</td> <td>32.14</td> <td>4.77</td> <td>33.68</td> <td>100</td> <td>145</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2362.32	53.40	74.00	-20.60	50.17	32.14	4.77	33.68	100	145	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																														
1	2362.32	53.40	74.00	-20.60	50.17	32.14	4.77	33.68	100	145	PEAK																											
 <p>Level (dBuV/m) vs Frequency (MHz) plot showing a peak at 2437.00 MHz. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 1000 to 3000 MHz. A red horizontal line is drawn at approximately 74 dBuV/m.</p> <p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 14 Setting : 6M Power setting 18 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>107.06</td> <td>-----</td> <td>103.50</td> <td>32.34</td> <td>4.86</td> <td>33.64</td> <td>100</td> <td>145</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	107.06	-----	103.50	32.34	4.86	33.64	100	145	PEAK
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																														
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																														
1	2437.00	107.06	-----	103.50	32.34	4.86	33.64	100	145	PEAK																												
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing an average level at 2388.99 MHz. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 2310 to 2437 MHz. A red horizontal line is drawn at approximately 54 dBuV/m.</p> <p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 14 Setting : 6M Power setting 18 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.99</td> <td>41.28</td> <td>54.00</td> <td>-12.72</td> <td>37.95</td> <td>32.21</td> <td>4.79</td> <td>33.67</td> <td>100</td> <td>145</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2388.99	41.28	54.00	-12.72	37.95	32.21	4.79	33.67	100	145	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																														
1	2388.99	41.28	54.00	-12.72	37.95	32.21	4.79	33.67	100	145	AVERAGE																											
 <p>Level (dBuV/m) vs Frequency (MHz) plot showing an average level at 2437.00 MHz. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 1000 to 3000 MHz. A red horizontal line is drawn at approximately 54 dBuV/m.</p> <p>Site : 03CH03-SZ Condition: AVG_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 14 Setting : 6M Power setting 18 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>97.85</td> <td>-----</td> <td>94.31</td> <td>32.33</td> <td>4.85</td> <td>33.64</td> <td>100</td> <td>145</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	97.85	-----	94.31	32.33	4.85	33.64	100	145	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																														
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																														
1	2437.00	97.85	-----	94.31	32.33	4.85	33.64	100	145	AVERAGE																												



Mode	5																																													
	Band Edge - R																																													
	2400-2483.5_802.11g_CH06_2437MHz																																													
ANT	1																																													
Pol.	Horizontal	Fundamental																																												
Peak	<p>Date: 2023-05-04</p> <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 14 Setting : 6M Power setting 18 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2489.29</td> <td>53.82</td> <td>74.00</td> <td>-20.18</td> <td>50.03</td> <td>32.47</td> <td>4.93</td> <td>33.61</td> <td>100</td> <td>145</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB							cm	deg	1	2489.29	53.82	74.00	-20.18	50.03	32.47	4.93	33.61	100	145	PEAK
	Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																																							
						cm	deg																																							
1	2489.29	53.82	74.00	-20.18	50.03	32.47	4.93	33.61	100	145	PEAK																																			
Avg	<p>Date: 2023-05-04</p> <p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 14 Setting : 6M Power setting 18 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.94</td> <td>41.81</td> <td>54.00</td> <td>-12.19</td> <td>38.04</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>100</td> <td>145</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB							cm	deg	1	2483.94	41.81	54.00	-12.19	38.04	32.46	4.92	33.61	100	145	AVERAGE
Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																																							
						cm	deg																																							
1	2483.94	41.81	54.00	-12.19	38.04	32.46	4.92	33.61	100	145	AVERAGE																																			



5																																						
Mode	Band Edge - L																																					
	2400-2483.5_802.11g_CH06_2437MHz																																					
ANT	1																																					
Pol.	Vertical																																					
Peak	<p style="text-align: right;">Date: 2023-05-04</p> <p>Site : 03CH03-SZ Condition: PEAK_BE_74_3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 14 Setting : 6M Power setting 18 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2368.42</td> <td>54.38</td> <td>74.00</td> <td>-19.62</td> <td>51.13</td> <td>32.16</td> <td>4.77</td> <td>33.68</td> <td>263</td> <td>62</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	2368.42	54.38	74.00	-19.62	51.13	32.16	4.77	33.68	263	62	PEAK	
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																															
1	2368.42	54.38	74.00	-19.62	51.13	32.16	4.77	33.68	263	62	PEAK																											
<p style="text-align: right;">Date: 2023-05-04</p> <p>Site : 03CH03-SZ Condition: PEAK_74_3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 14 Setting : 6M Power setting 18 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>107.20</td> <td>-----</td> <td>103.64</td> <td>32.34</td> <td>4.86</td> <td>33.64</td> <td>263</td> <td>62</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2437.00	107.20	-----	103.64	32.34	4.86	33.64	263	62	PEAK
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																														
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																														
1	2437.00	107.20	-----	103.64	32.34	4.86	33.64	263	62	PEAK																												
Avg	<p style="text-align: right;">Date: 2023-05-04</p> <p>Site : 03CH03-SZ Condition: AVG_BE_54_3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 14 Setting : 6M Power setting 18 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.74</td> <td>41.42</td> <td>54.00</td> <td>-12.58</td> <td>38.09</td> <td>32.21</td> <td>4.79</td> <td>33.67</td> <td>263</td> <td>62</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	2388.74	41.42	54.00	-12.58	38.09	32.21	4.79	33.67	263	62	AVERAGE	
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																															
1	2388.74	41.42	54.00	-12.58	38.09	32.21	4.79	33.67	263	62	AVERAGE																											
<p style="text-align: right;">Date: 2023-05-04</p> <p>Site : 03CH03-SZ Condition: AVG_54_3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 14 Setting : 6M Power setting 18 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>98.06</td> <td>-----</td> <td>94.48</td> <td>32.35</td> <td>4.87</td> <td>33.64</td> <td>263</td> <td>62</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2437.00	98.06	-----	94.48	32.35	4.87	33.64	263	62	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																														
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																														
1	2437.00	98.06	-----	94.48	32.35	4.87	33.64	263	62	AVERAGE																												



Mode	5																																					
	Band Edge - R																																					
	2400-2483.5_802.11g_CH06_2437MHz																																					
ANT	1																																					
Pol.	Vertical	Fundamental																																				
Peak	<p>Date: 2023-05-04</p> <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 14 Setting : 6M Power setting 18 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2488.79</td> <td>53.85</td> <td>74.00</td> <td>-20.15</td> <td>50.06</td> <td>32.47</td> <td>4.93</td> <td>33.61</td> <td>263</td> <td>62</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1	2488.79	53.85	74.00	-20.15	50.06	32.47	4.93	33.61	263	62	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																															
1	2488.79	53.85	74.00	-20.15	50.06	32.47	4.93	33.61	263	62	PEAK																											
Avg	<p>Date: 2023-05-04</p> <p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 14 Setting : 6M Power setting 18 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.38</td> <td>41.54</td> <td>54.00</td> <td>-12.46</td> <td>37.77</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>263</td> <td>62</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1	2484.38	41.54	54.00	-12.46	37.77	32.46	4.92	33.61	263	62	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																															
1	2484.38	41.54	54.00	-12.46	37.77	32.46	4.92	33.61	263	62	AVERAGE																											



Mode	5																																																																																																					
	Harmonic																																																																																																					
	2400-2483.5_802.11g_CH06_2437MHz																																																																																																					
ANT	1																																																																																																					
Pol.	Horizontal	Vertical																																																																																																				
Peak Avg	<p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 HORIZONTAL Mode : 14 Setting : 6W Power setting 18 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>44.42</td> <td>74.00</td> <td>-29.58</td> <td>54.85</td> <td>34.65</td> <td>7.77</td> <td>52.85</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>45.99</td> <td>74.00</td> <td>-28.01</td> <td>54.76</td> <td>36.41</td> <td>8.93</td> <td>54.11</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	44.42	74.00	-29.58	54.85	34.65	7.77	52.85	---	Peak	2	7311.00	45.99	74.00	-28.01	54.76	36.41	8.93	54.11	---	Peak	<p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 VERTICAL Mode : 14 Setting : 6W Power setting 18 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>45.75</td> <td>74.00</td> <td>-28.25</td> <td>56.18</td> <td>34.65</td> <td>7.77</td> <td>52.85</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>45.59</td> <td>74.00</td> <td>-28.41</td> <td>54.36</td> <td>36.41</td> <td>8.93</td> <td>54.11</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	45.75	74.00	-28.25	56.18	34.65	7.77	52.85	---	Peak	2	7311.00	45.59	74.00	-28.41	54.36	36.41	8.93	54.11	---	Peak
	Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	4874.00	44.42	74.00	-29.58	54.85	34.65	7.77	52.85	---	Peak																																																																																												
2	7311.00	45.99	74.00	-28.01	54.76	36.41	8.93	54.11	---	Peak																																																																																												
Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	4874.00	45.75	74.00	-28.25	56.18	34.65	7.77	52.85	---	Peak																																																																																												
2	7311.00	45.59	74.00	-28.41	54.36	36.41	8.93	54.11	---	Peak																																																																																												



		6																																																																														
Mode	Band Edge																																																																															
	2400-2483.5_802.11g_CH11_2462MHz																																																																															
ANT	1																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	<p>Level (dBuV/m) vs Frequency (MHz) plot. Date: 2023-05-04. Peak at 2483.51 MHz.</p> <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 15 Setting : 6M Power setting 15 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.51</td> <td>69.97</td> <td>74.00</td> <td>-4.03</td> <td>66.20</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>100</td> <td>145</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2483.51	69.97	74.00	-4.03	66.20	32.46	4.92	33.61	100	145	PEAK	<p>Level (dBuV/m) vs Frequency (MHz) plot. Date: 2023-05-04. Peak at 2462.00 MHz.</p> <p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 15 Setting : 6M Power setting 15 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>107.85</td> <td>-----</td> <td>-----</td> <td>104.19</td> <td>32.40</td> <td>4.89</td> <td>33.63</td> <td>100</td> <td>145</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2462.00	107.85	-----	-----	104.19	32.40	4.89	33.63	100	145	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																								
1	2483.51	69.97	74.00	-4.03	66.20	32.46	4.92	33.61	100	145	PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																								
1	2462.00	107.85	-----	-----	104.19	32.40	4.89	33.63	100	145	PEAK																																																																					
Avg	<p>Level (dBuV/m) vs Frequency (MHz) plot. Date: 2023-05-04. Avg at 2483.70 MHz.</p> <p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 15 Setting : 6M Power setting 15 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.70</td> <td>50.26</td> <td>54.00</td> <td>-3.74</td> <td>46.49</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>100</td> <td>145</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2483.70	50.26	54.00	-3.74	46.49	32.46	4.92	33.61	100	145	AVERAGE	<p>Level (dBuV/m) vs Frequency (MHz) plot. Date: 2023-05-04. Avg at 2462.00 MHz.</p> <p>Site : 03CH03-SZ Condition: AVG_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 15 Setting : 6M Power setting 15 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>98.44</td> <td>-----</td> <td>-----</td> <td>94.78</td> <td>32.40</td> <td>4.89</td> <td>33.63</td> <td>100</td> <td>145</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2462.00	98.44	-----	-----	94.78	32.40	4.89	33.63	100	145	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																								
1	2483.70	50.26	54.00	-3.74	46.49	32.46	4.92	33.61	100	145	AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																								
1	2462.00	98.44	-----	-----	94.78	32.40	4.89	33.63	100	145	AVERAGE																																																																					



		6																																																								
Mode	Band Edge																																																									
	2400-2483.5_802.11g_CH11_2462MHz																																																									
ANT	1																																																									
Pol.	Vertical	Fundamental																																																								
Peak	<p>Date: 2023-05-04</p> <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 15 Setting : 6M Power setting 15 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2483.55 68.63 74.00</td> <td>-5.37</td> <td>64.86</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>200 50 PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2483.55 68.63 74.00	-5.37	64.86	32.46	4.92	33.61	200 50 PEAK	<p>Date: 2023-05-04</p> <p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 15 Setting : 6M Power setting 15 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2462.00 103.12</td> <td>-----</td> <td>99.46</td> <td>32.40</td> <td>4.89</td> <td>33.63</td> <td>200 50 PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2462.00 103.12	-----	99.46	32.40	4.89	33.63	200 50 PEAK
	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																			
Freq Level Line (dB)	Level Factor	Loss Factor																																																								
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																				
1 2483.55 68.63 74.00	-5.37	64.86	32.46	4.92	33.61	200 50 PEAK																																																				
Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																				
Freq Level Line (dB)	Level Factor	Loss Factor																																																								
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																				
1 2462.00 103.12	-----	99.46	32.40	4.89	33.63	200 50 PEAK																																																				
Avg	<p>Date: 2023-05-04</p> <p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 15 Setting : 6M Power setting 15 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2483.51 48.68 54.00</td> <td>-5.32</td> <td>44.91</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>200 50 AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2483.51 48.68 54.00	-5.32	44.91	32.46	4.92	33.61	200 50 AVERAGE	<p>Date: 2023-05-04</p> <p>Site : 03CH03-SZ Condition: AVG_54 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 15 Setting : 6M Power setting 15 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2462.00 94.18</td> <td>-----</td> <td>90.54</td> <td>32.39</td> <td>4.88</td> <td>33.63</td> <td>200 50 AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2462.00 94.18	-----	90.54	32.39	4.88	33.63	200 50 AVERAGE
Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																				
Freq Level Line (dB)	Level Factor	Loss Factor																																																								
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																				
1 2483.51 48.68 54.00	-5.32	44.91	32.46	4.92	33.61	200 50 AVERAGE																																																				
Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																				
Freq Level Line (dB)	Level Factor	Loss Factor																																																								
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																				
1 2462.00 94.18	-----	90.54	32.39	4.88	33.63	200 50 AVERAGE																																																				







Mode	6																																																																																											
	Harmonic																																																																																											
	2400-2483.5_802.11g_CH11_2462MHz																																																																																											
ANT	1																																																																																											
Pol.	Horizontal	Vertical																																																																																										
Peak Avg	<p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 HORIZONTAL Mode : 15 Setting : 6M Power setting 15 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.00</td> <td>43.28</td> <td>74.00</td> <td>-30.72</td> <td>53.65</td> <td>34.63</td> <td>7.79</td> <td>52.79</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>7386.00</td> <td>44.31</td> <td>74.00</td> <td>-29.69</td> <td>52.72</td> <td>36.49</td> <td>9.17</td> <td>54.07</td> <td>--- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4924.00	43.28	74.00	-30.72	53.65	34.63	7.79	52.79	--- Peak	2	7386.00	44.31	74.00	-29.69	52.72	36.49	9.17	54.07	--- Peak	<p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 VERTICAL Mode : 15 Setting : 6M Power setting 15 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.00</td> <td>44.74</td> <td>74.00</td> <td>-29.26</td> <td>55.11</td> <td>34.63</td> <td>7.79</td> <td>52.79</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>7386.00</td> <td>44.68</td> <td>74.00</td> <td>-29.32</td> <td>53.09</td> <td>36.49</td> <td>9.17</td> <td>54.07</td> <td>--- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4924.00	44.74	74.00	-29.26	55.11	34.63	7.79	52.79	--- Peak	2	7386.00	44.68	74.00	-29.32	53.09	36.49	9.17	54.07	--- Peak
	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																				
1	4924.00	43.28	74.00	-30.72	53.65	34.63	7.79	52.79	--- Peak																																																																																			
2	7386.00	44.31	74.00	-29.69	52.72	36.49	9.17	54.07	--- Peak																																																																																			
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																				
1	4924.00	44.74	74.00	-29.26	55.11	34.63	7.79	52.79	--- Peak																																																																																			
2	7386.00	44.68	74.00	-29.32	53.09	36.49	9.17	54.07	--- Peak																																																																																			



7																																																																																												
Mode	Band Edge																																																																																											
	2400-2483.5_802.11n_HT20_CH01_2412MHz																																																																																											
ANT	1																																																																																											
Pol.	Horizontal																																																																																											
Peak	<div style="display: flex; justify-content: space-between;"> <div style="width: 48%;"> <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 16 Setting : MCS 0 Power setting 10 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>65.45</td> <td>74.00</td> <td>-8.55</td> <td>62.11</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>175</td> <td>32</td> <td>PEAK</td> </tr> </tbody> </table> </div> <div style="width: 48%;"> <p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 16 Setting : MCS 0 Power setting 10 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>100.44</td> <td>-----</td> <td>96.98</td> <td>32.28</td> <td>4.83</td> <td>33.65</td> <td>175</td> <td>32</td> <td>PEAK</td> </tr> </tbody> </table> </div> </div>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm								deg	1	2389.95	65.45	74.00	-8.55	62.11	32.21	4.80	33.67	175	32	PEAK	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg										1	2412.00	100.44	-----	96.98	32.28	4.83	33.65	175	32	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																																					
							deg																																																																																					
1	2389.95	65.45	74.00	-8.55	62.11	32.21	4.80	33.67	175	32	PEAK																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																				
1	2412.00	100.44	-----	96.98	32.28	4.83	33.65	175	32	PEAK																																																																																		
Avg	<div style="display: flex; justify-content: space-between;"> <div style="width: 48%;"> <p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 16 Setting : MCS 0 Power setting 10 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>45.61</td> <td>54.00</td> <td>-8.39</td> <td>42.27</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>175</td> <td>32</td> <td>AVERAGE</td> </tr> </tbody> </table> </div> <div style="width: 48%;"> <p>Site : 03CH03-SZ Condition: AVG_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 16 Setting : MCS 0 Power setting 10 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>90.63</td> <td>-----</td> <td>87.16</td> <td>32.29</td> <td>4.83</td> <td>33.65</td> <td>175</td> <td>32</td> <td>AVERAGE</td> </tr> </tbody> </table> </div> </div>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm								deg	1	2389.95	45.61	54.00	-8.39	42.27	32.21	4.80	33.67	175	32	AVERAGE	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg										1	2412.00	90.63	-----	87.16	32.29	4.83	33.65	175	32	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																																					
							deg																																																																																					
1	2389.95	45.61	54.00	-8.39	42.27	32.21	4.80	33.67	175	32	AVERAGE																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																				
1	2412.00	90.63	-----	87.16	32.29	4.83	33.65	175	32	AVERAGE																																																																																		

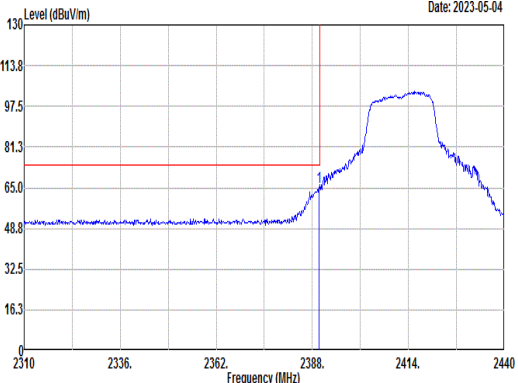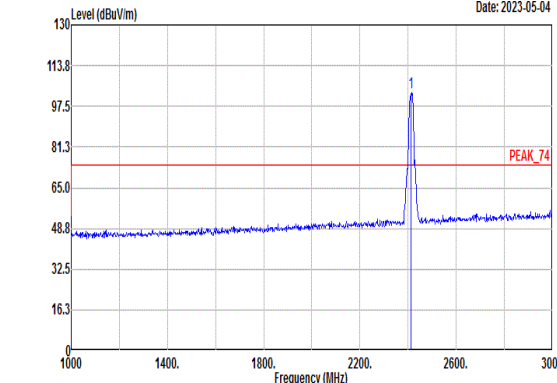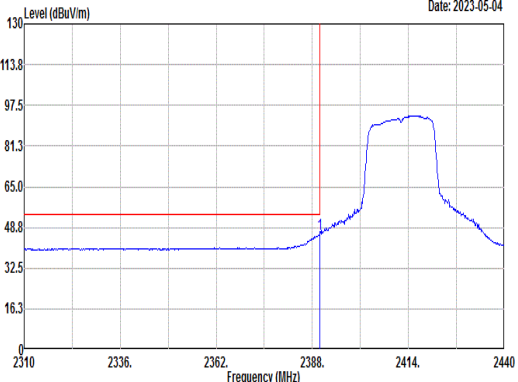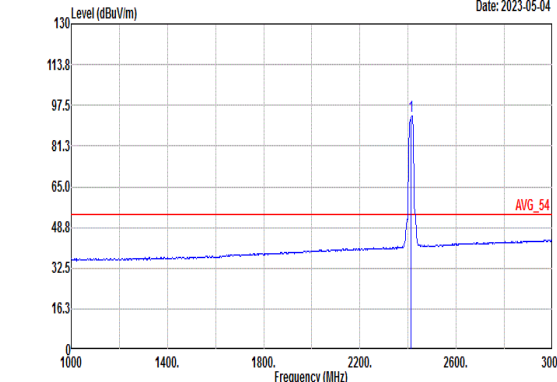

		7																																																																								
Mode	Band Edge																																																																									
	2400-2483.5_802.11n_HT20_CH01_2412MHz																																																																									
ANT	1																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The plot shows a signal between 2388 MHz and 2414 MHz. A red horizontal line indicates a limit at approximately 74.00 dBuV/m. The peak level is 65.01 dBuV/m.</p> <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 16 Setting : MCS 0 Power setting 10 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>PEAK</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.82</td> <td>65.01</td> <td>74.00</td> <td>-8.99</td> <td>61.67</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>211</td> <td>66</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	PEAK	1	2389.82	65.01	74.00	-8.99	61.67	32.21	4.80	33.67	211	66	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a sharp peak at 2412.00 MHz. A red horizontal line indicates a limit at approximately 74.00 dBuV/m. The peak level is 102.89 dBuV/m.</p> <p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 16 Setting : MCS 0 Power setting 10 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>PEAK</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>102.89</td> <td>-----</td> <td>99.43</td> <td>32.28</td> <td>4.83</td> <td>33.65</td> <td>211</td> <td>66</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	PEAK	1	2412.00	102.89	-----	99.43	32.28	4.83	33.65	211	66	PEAK
	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	PEAK																																																																	
1	2389.82	65.01	74.00	-8.99	61.67	32.21	4.80	33.67	211	66	PEAK																																																															
Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	PEAK																																																																	
1	2412.00	102.89	-----	99.43	32.28	4.83	33.65	211	66	PEAK																																																																
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The plot shows a signal between 2388 MHz and 2414 MHz. A red horizontal line indicates a limit at approximately 54.00 dBuV/m. The average level is 46.09 dBuV/m.</p> <p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 16 Setting : MCS 0 Power setting 10 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>AVERAGE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>46.09</td> <td>54.00</td> <td>-7.91</td> <td>42.75</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>211</td> <td>66</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	AVERAGE	1	2389.95	46.09	54.00	-7.91	42.75	32.21	4.80	33.67	211	66	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a sharp peak at 2412.00 MHz. A red horizontal line indicates a limit at approximately 54.00 dBuV/m. The average level is 93.26 dBuV/m.</p> <p>Site : 03CH03-SZ Condition: AVG_54 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 16 Setting : MCS 0 Power setting 10 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>AVERAGE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>93.26</td> <td>-----</td> <td>89.80</td> <td>32.28</td> <td>4.83</td> <td>33.65</td> <td>211</td> <td>66</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	AVERAGE	1	2412.00	93.26	-----	89.80	32.28	4.83	33.65	211	66	AVERAGE
Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	AVERAGE																																																																	
1	2389.95	46.09	54.00	-7.91	42.75	32.21	4.80	33.67	211	66	AVERAGE																																																															
Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	AVERAGE																																																																	
1	2412.00	93.26	-----	89.80	32.28	4.83	33.65	211	66	AVERAGE																																																																



Mode	7																																																																											
	Harmonic																																																																											
	2400-2483.5_802.11n_HT20_CH01_2412MHz																																																																											
ANT	1																																																																											
Pol.	Horizontal	Vertical																																																																										
Peak Avg	<p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 HORIZONTAL Mode : 16 Setting : MCS0 Power setting 10 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Peak</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>43.26</td> <td>74.00</td> <td>-30.74</td> <td>53.75</td> <td>34.67</td> <td>7.75</td> <td>52.91</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Peak	1	4824.00	43.26	74.00	-30.74	53.75	34.67	7.75	52.91	---	---	Peak	<p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 VERTICAL Mode : 16 Setting : MCS0 Power setting 10 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Peak</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>43.29</td> <td>74.00</td> <td>-30.71</td> <td>53.78</td> <td>34.67</td> <td>7.75</td> <td>52.91</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Peak	1	4824.00	43.29	74.00	-30.71	53.78	34.67	7.75	52.91	---	---	Peak
	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Peak																																																																		
1	4824.00	43.26	74.00	-30.74	53.75	34.67	7.75	52.91	---	---	Peak																																																																	
Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Peak																																																																		
1	4824.00	43.29	74.00	-30.71	53.78	34.67	7.75	52.91	---	---	Peak																																																																	



8																															
Mode	Band Edge - L																														
	2400-2483.5_802.11n_HT20_CH06_2437MHz																														
ANT	1																														
Pol.	Horizontal																														
Peak	<p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 17 Setting : MCS 0 Power setting 18 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2379.98</td> <td>53.78</td> <td>74.00</td> <td>-20.22</td> <td>50.47</td> <td>32.19</td> <td>4.79</td> <td>33.67</td> <td>190</td> <td>29</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	dB	cm	deg	1	2379.98	53.78	74.00	-20.22	50.47	32.19	4.79	33.67	190	29	PEAK
	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																								
Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	dB	cm	deg																					
1	2379.98	53.78	74.00	-20.22	50.47	32.19	4.79	33.67	190	29	PEAK																				
<p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 17 Setting : MCS 0 Power setting 18 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>103.71</td> <td>-----</td> <td>100.17</td> <td>32.33</td> <td>4.85</td> <td>33.64</td> <td>190</td> <td>29</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	dB	cm	deg	1	2437.00	103.71	-----	100.17	32.33	4.85	33.64	190	29	PEAK	
Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																								
Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	dB	cm	deg																					
1	2437.00	103.71	-----	100.17	32.33	4.85	33.64	190	29	PEAK																					
Avg	<p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 17 Setting : MCS 0 Power setting 18 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2387.98</td> <td>40.98</td> <td>54.00</td> <td>-13.02</td> <td>37.65</td> <td>32.21</td> <td>4.79</td> <td>33.67</td> <td>190</td> <td>29</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	dB	cm	deg	1	2387.98	40.98	54.00	-13.02	37.65	32.21	4.79	33.67	190	29	AVERAGE
	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																								
Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	dB	cm	deg																					
1	2387.98	40.98	54.00	-13.02	37.65	32.21	4.79	33.67	190	29	AVERAGE																				
<p>Site : 03CH03-SZ Condition: AVG_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 17 Setting : MCS 0 Power setting 18 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>94.24</td> <td>-----</td> <td>90.67</td> <td>32.35</td> <td>4.86</td> <td>33.64</td> <td>190</td> <td>29</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	dB	cm	deg	1	2437.00	94.24	-----	90.67	32.35	4.86	33.64	190	29	AVERAGE	
Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																								
Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	dB	cm	deg																					
1	2437.00	94.24	-----	90.67	32.35	4.86	33.64	190	29	AVERAGE																					




8																																					
Mode	Band Edge - R																																				
2400-2483.5_802.11n_HT20_CH06_2437MHz																																					
ANT	1																																				
Pol.	Horizontal																																				
Peak	Fundamental																																				
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>Date: 2023-05-04</p> <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 17 Setting : MCS 0 Power setting 18 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.06</td> <td>53.61</td> <td>74.00</td> <td>-20.39</td> <td>49.84</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>190</td> <td>29</td> <td>PEAK</td> </tr> </tbody> </table> </div> <div style="width: 45%; text-align: center;"> <p>Blank</p> </div> </div>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2484.06	53.61	74.00	-20.39	49.84	32.46	4.92	33.61	190	29	PEAK
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																														
1	2484.06	53.61	74.00	-20.39	49.84	32.46	4.92	33.61	190	29	PEAK																										
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>Date: 2023-05-04</p> <p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 17 Setting : MCS 0 Power setting 18 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2490.87</td> <td>41.35</td> <td>54.00</td> <td>-12.65</td> <td>37.55</td> <td>32.48</td> <td>4.93</td> <td>33.61</td> <td>190</td> <td>29</td> <td>AVERAGE</td> </tr> </tbody> </table> </div> <div style="width: 45%; text-align: center;"> <p>Blank</p> </div> </div>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2490.87	41.35	54.00	-12.65	37.55	32.48	4.93	33.61	190	29	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																														
1	2490.87	41.35	54.00	-12.65	37.55	32.48	4.93	33.61	190	29	AVERAGE																										



8																																						
Mode	Band Edge - L																																					
	2400-2483.5_802.11n_HT20_CH06_2437MHz																																					
ANT	1																																					
Pol.	Vertical																																					
Peak	<p>Level (dBuV/m) vs Frequency (MHz) Date: 2023-05-04</p> <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 17 Setting : MCS 0 Power setting 18 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.61</td> <td>54.42</td> <td>74.00</td> <td>-19.58</td> <td>51.09</td> <td>32.21</td> <td>4.79</td> <td>33.67</td> <td>231</td> <td>68</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2388.61	54.42	74.00	-19.58	51.09	32.21	4.79	33.67	231	68	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																														
1	2388.61	54.42	74.00	-19.58	51.09	32.21	4.79	33.67	231	68	PEAK																											
<p>Level (dBuV/m) vs Frequency (MHz) Date: 2023-05-04</p> <p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 17 Setting : MCS 0 Power setting 18 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>106.77</td> <td>-----</td> <td>103.20</td> <td>32.35</td> <td>4.86</td> <td>33.64</td> <td>231</td> <td>68</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	106.77	-----	103.20	32.35	4.86	33.64	231	68	PEAK
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																														
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																														
1	2437.00	106.77	-----	103.20	32.35	4.86	33.64	231	68	PEAK																												
Avg	<p>Level (dBuV/m) vs Frequency (MHz) Date: 2023-05-04</p> <p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 17 Setting : MCS 0 Power setting 18 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.36</td> <td>41.50</td> <td>54.00</td> <td>-12.50</td> <td>38.17</td> <td>32.21</td> <td>4.79</td> <td>33.67</td> <td>231</td> <td>68</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2388.36	41.50	54.00	-12.50	38.17	32.21	4.79	33.67	231	68	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																														
1	2388.36	41.50	54.00	-12.50	38.17	32.21	4.79	33.67	231	68	AVERAGE																											
<p>Level (dBuV/m) vs Frequency (MHz) Date: 2023-05-04</p> <p>Site : 03CH03-SZ Condition: AVG_54 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 17 Setting : MCS 0 Power setting 18 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>97.30</td> <td>-----</td> <td>93.74</td> <td>32.34</td> <td>4.86</td> <td>33.64</td> <td>231</td> <td>68</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	97.30	-----	93.74	32.34	4.86	33.64	231	68	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																														
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																														
1	2437.00	97.30	-----	93.74	32.34	4.86	33.64	231	68	AVERAGE																												




8	
Mode	Band Edge - R
	2400-2483.5_802.11n HT20_CH06_2437MHz
ANT	1
Pol.	Vertical
Peak	Fundamental
	Blank
Avg	Fundamental
	Blank

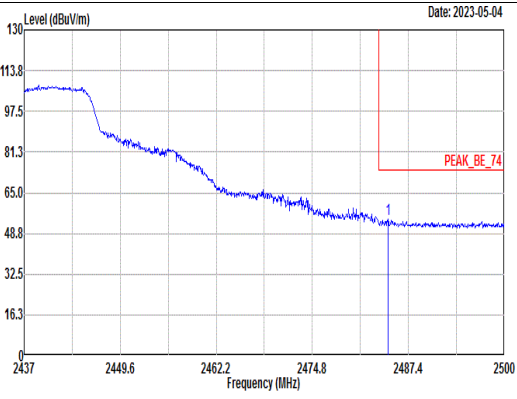

Site : 03CH03-SZ
 Condition: PEAK_BE_74 3m ANT3117_0057 VERTICAL
 : RBW:1000.000kHz VBW:3000.000kHz
 Mode : 17
 Setting : MCS 0 Power setting 18
 Plane : Y with accessories
 : 352000530016413/352000530016421

Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor				
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm				
1	2484.75	54.25	74.00	-19.75	50.48	32.46	4.92	33.61	231	68	PEAK

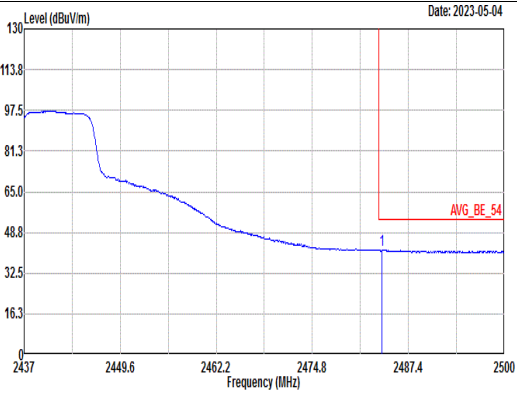

Site : 03CH03-SZ
 Condition: AVG_BE_54 3m ANT3117_0057 VERTICAL
 : RBW:1000.000kHz VBW:1.000kHz
 Mode : 17
 Setting : MCS 0 Power setting 18
 Plane : Y with accessories
 : 352000530016413/352000530016421

Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor				
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm				
1	2483.94	41.71	54.00	-12.29	37.94	32.46	4.92	33.61	231	68	AVERAGE



Mode	8																																																																																									
	Harmonic																																																																																									
	2400-2483.5_802.11n_HT20_CH06_2437MHz																																																																																									
ANT	1																																																																																									
Pol.	Horizontal	Vertical																																																																																								
Peak Avg	<p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 HORIZONTAL Mode : 17 Setting : NCS0 Power setting 18 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Level Factor</th> <th>Cable Loss Factor</th> <th>Preamp Loss Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>44.71</td> <td>74.00</td> <td>-29.29</td> <td>55.14</td> <td>34.65</td> <td>7.77</td> <td>52.85</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>45.48</td> <td>74.00</td> <td>-28.52</td> <td>54.25</td> <td>36.41</td> <td>8.93</td> <td>54.11</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4874.00	44.71	74.00	-29.29	55.14	34.65	7.77	52.85	---	Peak	2	7311.00	45.48	74.00	-28.52	54.25	36.41	8.93	54.11	---	Peak	<p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 VERTICAL Mode : 17 Setting : NCS0 Power setting 18 Plane : Y with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Level Factor</th> <th>Cable Loss Factor</th> <th>Preamp Loss Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>46.01</td> <td>74.00</td> <td>-27.99</td> <td>56.44</td> <td>34.65</td> <td>7.77</td> <td>52.85</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>46.21</td> <td>74.00</td> <td>-27.79</td> <td>54.98</td> <td>36.41</td> <td>8.93</td> <td>54.11</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4874.00	46.01	74.00	-27.99	56.44	34.65	7.77	52.85	---	Peak	2	7311.00	46.21	74.00	-27.79	54.98	36.41	8.93	54.11	---	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	4874.00	44.71	74.00	-29.29	55.14	34.65	7.77	52.85	---	Peak																																																																																
2	7311.00	45.48	74.00	-28.52	54.25	36.41	8.93	54.11	---	Peak																																																																																
Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	4874.00	46.01	74.00	-27.99	56.44	34.65	7.77	52.85	---	Peak																																																																																
2	7311.00	46.21	74.00	-27.79	54.98	36.41	8.93	54.11	---	Peak																																																																																



		9																																																																														
Mode	Band Edge																																																																															
	2400-2483.5_802.11n_HT20_CH11_2462MHz																																																																															
ANT	1																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	<p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 HORIZONTAL Mode : 18 Setting : MCS 0 Power setting 14 Plane : Y with accessories Plane : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.51</td> <td>69.69</td> <td>74.00</td> <td>-4.31</td> <td>65.92</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>116</td> <td>49</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2483.51	69.69	74.00	-4.31	65.92	32.46	4.92	33.61	116	49	PEAK	<p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 HORIZONTAL Mode : 18 Setting : MCS 0 Power setting 14 Plane : Y with accessories Plane : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>104.02</td> <td>-----</td> <td>-----</td> <td>100.38</td> <td>32.39</td> <td>4.88</td> <td>33.63</td> <td>116</td> <td>49</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2462.00	104.02	-----	-----	100.38	32.39	4.88	33.63	116	49	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																								
1	2483.51	69.69	74.00	-4.31	65.92	32.46	4.92	33.61	116	49	PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																								
1	2462.00	104.02	-----	-----	100.38	32.39	4.88	33.63	116	49	PEAK																																																																					
Avg	<p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 HORIZONTAL Mode : 18 Setting : MCS 0 Power setting 14 Plane : Y with accessories Plane : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.51</td> <td>49.43</td> <td>54.00</td> <td>-4.57</td> <td>45.66</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>116</td> <td>49</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2483.51	49.43	54.00	-4.57	45.66	32.46	4.92	33.61	116	49	AVERAGE	<p>Site : 03CH03-SZ Condition: AVG_54 3m ANT3117_0057 HORIZONTAL Mode : 18 Setting : MCS 0 Power setting 14 Plane : Y with accessories Plane : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>94.35</td> <td>-----</td> <td>-----</td> <td>90.71</td> <td>32.39</td> <td>4.88</td> <td>33.63</td> <td>116</td> <td>49</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2462.00	94.35	-----	-----	90.71	32.39	4.88	33.63	116	49	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																								
1	2483.51	49.43	54.00	-4.57	45.66	32.46	4.92	33.61	116	49	AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																								
1	2462.00	94.35	-----	-----	90.71	32.39	4.88	33.63	116	49	AVERAGE																																																																					