



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2343-1
FCC ID : IHDT56AM4
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Jun. 15, 2023 ~ Jul. 17, 2023

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test..... 5

 1.4 Product Specification of Equipment Under Test..... 5

 1.5 Modification of EUT 5

 1.6 Specification of Accessory 6

 1.7 Testing Location 6

 1.8 Test Software..... 6

 1.9 Applicable Standards..... 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

 2.1 Carrier Frequency and Channel 8

 2.2 Test Mode 9

 2.3 Connection Diagram of Test System 10

 2.4 Support Unit used in test configuration and system 11

 2.5 EUT Operation Test Setup 11

 2.6 Measurement Results Explanation Example..... 11

3 TEST RESULT 12

 3.1 6dB and 99% Bandwidth Measurement 12

 3.2 Output Power Measurement..... 13

 3.3 Power Spectral Density Measurement 16

 3.4 Conducted Band Edges and Spurious Emission Measurement 17

 3.5 Radiated Band Edges and Spurious Emission Measurement 18

 3.6 AC Conducted Emission Measurement..... 22

 3.7 Antenna Requirements 24

4 LIST OF MEASURING EQUIPMENT 25

5 MEASUREMENT UNCERTAINTY 26

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. DUTY CYCLE PLOTS

APPENDIX E. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	≥ 0.5MHz	Pass	-
3.1	-	99% Bandwidth	-	Report Only	-
3.2	15.247(b)	Power Output Measurement	≤ 30dBm	Pass	-
3.3	15.247(e)	Power Spectral Density	≤ 8dBm/3kHz	Pass	-
3.4	15.247(d)	Conducted Band Edges	≤ 20dBc	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.08 dB at 2389.95 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 9.43 dB at 0.150 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2343-1
FCC ID	IHDT56AM4
IMEI Code	Conducted: 352326290031114/352326290031122 Conduction: 352326290031734/352326290031742 Radiation: 352326290030694
HW Version	DVT2
SW Version	TTD33.32
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 21.39 dBm (0.1377 W) 802.11g : 24.63 dBm (0.2904 W) 802.11n HT20 : 25.01 dBm (0.3170 W)
99% Occupied Bandwidth	802.11b : 13.307 MHz 802.11g : 17.822 MHz 802.11n HT20 : 18.462 MHz
Antenna Type / Gain	IFA Antenna type with gain -2.7 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Specification of Accessory

Specification of Accessory				
AC Adapter 1 (US)	Brand Name	Motorola(Salcomp)	Model Name	MC-201L
AC Adapter 1 (EU)	Brand Name	Motorola(Salcomp)	Model Name	MC-202L
AC Adapter 1 (AR)	Brand Name	Motorola(Salcomp)	Model Name	MC-206L
AC Adapter 1 (BR)	Brand Name	Motorola(Salcomp)	Model Name	MC-207L
AC Adapter 1 (CHILE)	Brand Name	Motorola(Salcomp)	Model Name	MC-209L
AC Adapter 2 (US)	Brand Name	Motorola(AOHAI)	Model Name	MC-201L
AC Adapter 2 (EU)	Brand Name	Motorola(AOHAI)	Model Name	MC-202L
AC Adapter 2 (AR)	Brand Name	Motorola(AOHAI)	Model Name	MC-206L
AC Adapter 3 (BR)	Brand Name	Motorola(Cliptech)	Model Name	MC-207L
AC Adapter 4 (BR)	Brand Name	Motorola(Chenyang)	Model Name	MC-207L
Battery 1	Brand Name	Motorola(ATL)	Model Name	PC50
Battery 2	Brand Name	Motorola (SCUD)	Model Name	PC50
USB Cable 1	Brand Name	Motorola (WASHIN)	Model Name	S928D92375
USB Cable 2	Brand Name	Motorola (Saibao)	Model Name	S928D95755
USB Cable 3	Brand Name	Motorola (ISHENG)	Model Name	SC18D38574

1.7 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH06-KS TH01-KS	CN1257	314309

1.8 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH06-KS	AUDIX	E3	6.2009-8-24a1
2.	CO01-KS	AUDIX	E3	6.2009-8-24



1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-



2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0

Test Cases	
AC Conducted Emission	Mode 1 :GSM 850 Idle + Bluetooth Link + WLAN Link (2.4G) + Adaptor2 + Earphone + USB Cable1 + Battery1


RSE Co-location
802.11g CH01 2412 + LTE CA_5A-7A Link

Remark:


1. For Radiated Test Cases, The tests were performance with Adapter 2, Earphone and USB Cable1.
2. The RSE co-location mode is assessed from the worst WLAN TX + WWAN Link mode.

2.3 Connection Diagram of Test System

AC Conducted Emission:

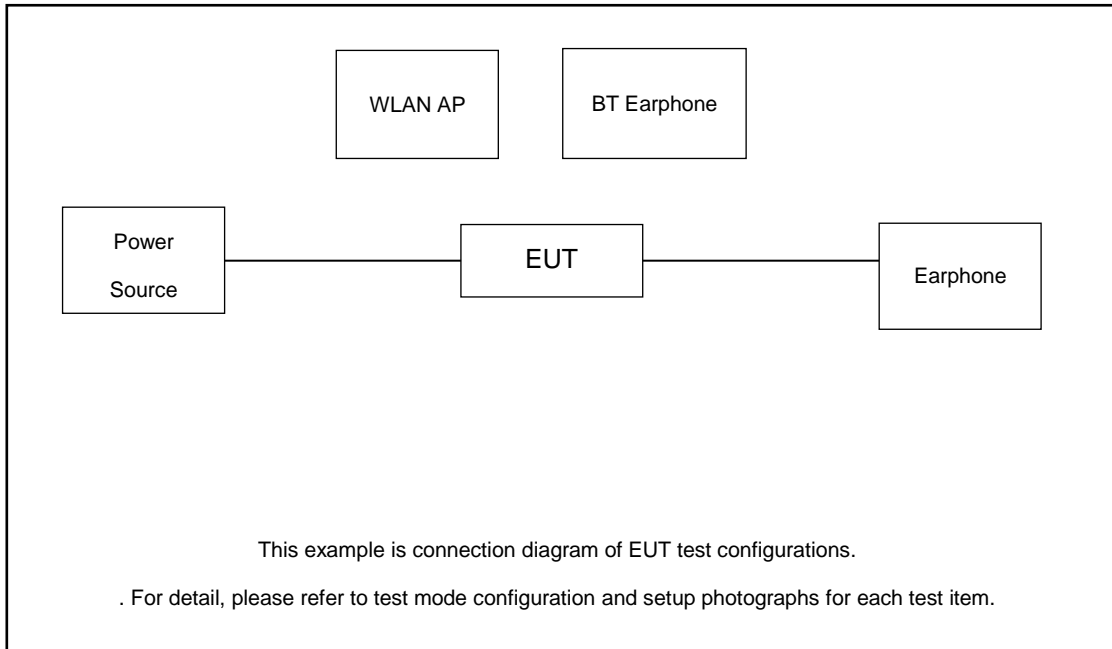

Radiated Emission:

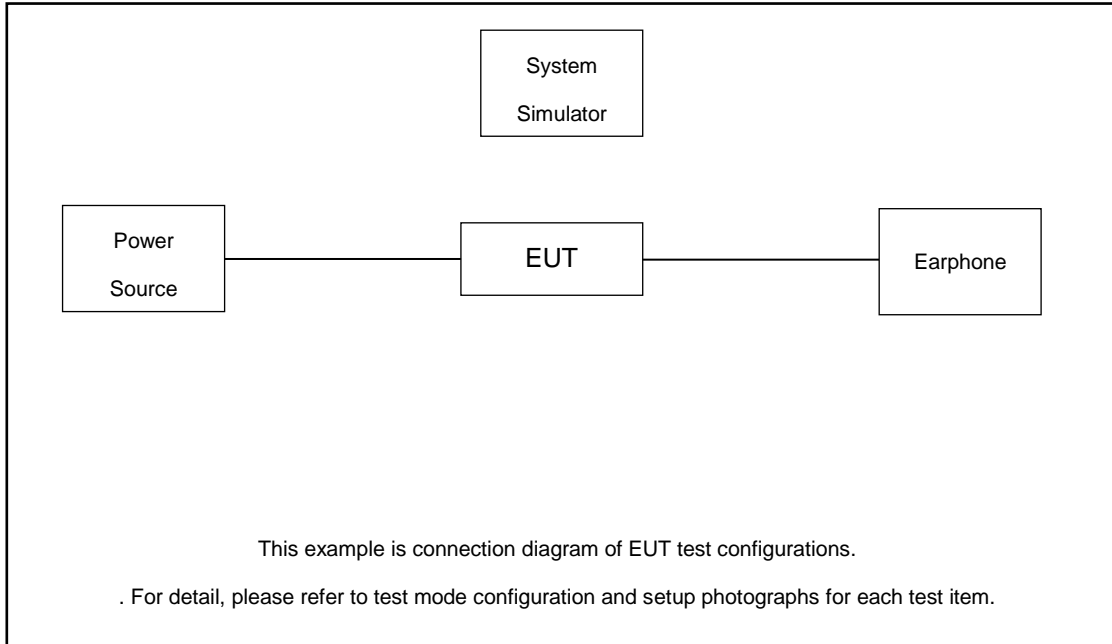

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritus	MT8821C	N/A	N/A	Unshielded,1.8m
2.	Bluetooth Earphone	Lenovo	thinkplus-BH3	N/A	N/A	N/A
3.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
4.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
5.	Earphone	N/A	N/A	N/A	N/A	N/A
6.	SD Card	Kingston	8GB	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 2.45 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset}(dB) &= \text{RF cable loss}(dB) + \text{attenuator factor}(dB). \\ &= 2.45 + 10 = 12.45 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1%~5% of OBW and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

3.2.4 Test Setup

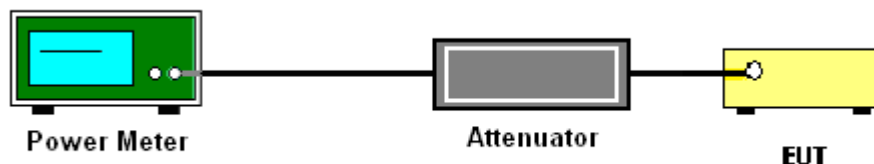



3.2.5 Test Result of Peak Output Power

2.4GHz Band Single Antenna										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant6	Ant6	Ant6	Ant6	Ant6	
11b	1Mbps	1	1	2412	21.09	30.00	-2.70	18.39	36.00	Pass
11b	1Mbps	1	6	2437	21.24	30.00	-2.70	18.54	36.00	Pass
11b	1Mbps	1	11	2462	21.39	30.00	-2.70	18.69	36.00	Pass
11g	6Mbps	1	1	2412	23.55	30.00	-2.70	20.85	36.00	Pass
11g	6Mbps	1	2	2417	24.03	30.00	-2.70	21.33	36.00	Pass
11g	6Mbps	1	6	2437	24.63	30.00	-2.70	21.93	36.00	Pass
11g	6Mbps	1	11	2462	24.09	30.00	-2.70	21.39	36.00	Pass
HT20	MCS0	1	1	2412	23.64	30.00	-2.70	20.94	36.00	Pass
HT20	MCS0	1	2	2417	24.00	30.00	-2.70	21.30	36.00	Pass
HT20	MCS0	1	6	2437	25.01	30.00	-2.70	22.31	36.00	Pass
HT20	MCS0	1	11	2462	24.08	30.00	-2.70	21.38	36.00	Pass



3.2.6 Test Result of Average Output Power (Reporting Only)

2.4GHz Band Single Antenna								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power with duty factor (dBm)	DG (dBi)	EIRP Power (dBm)
					Ant6	Ant6	Ant6	Ant6
11b	1Mbps	1	1	2412	0.00	18.81	-2.70	16.11
11b	1Mbps	1	6	2437	0.00	18.89	-2.70	16.19
11b	1Mbps	1	11	2462	0.00	19.16	-2.70	16.46
11g	6Mbps	1	1	2412	0.00	15.12	-2.70	12.42
11g	6Mbps	1	2	2417	0.00	17.43	-2.70	14.73
11g	6Mbps	1	6	2437	0.00	18.51	-2.70	15.81
11g	6Mbps	1	11	2462	0.00	16.02	-2.70	13.32
HT20	MCS0	1	1	2412	0.00	14.14	-2.70	11.44
HT20	MCS0	1	2	2417	0.00	16.36	-2.70	13.66
HT20	MCS0	1	6	2437	0.00	18.66	-2.70	15.96
HT20	MCS0	1	11	2462	0.00	16.11	-2.70	13.41

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup

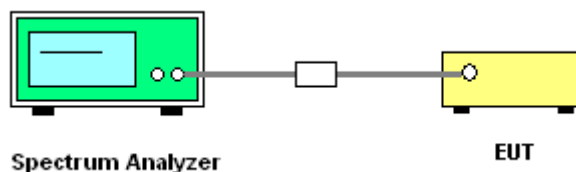

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.11
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup



3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Please refer to Appendix A.



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

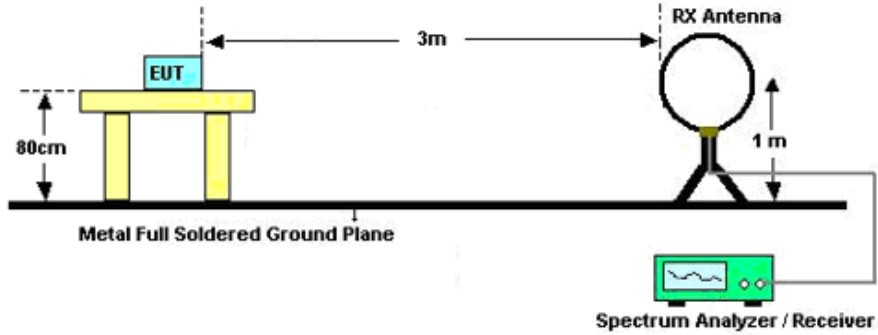

For radiated emissions from 30MHz to 1GHz

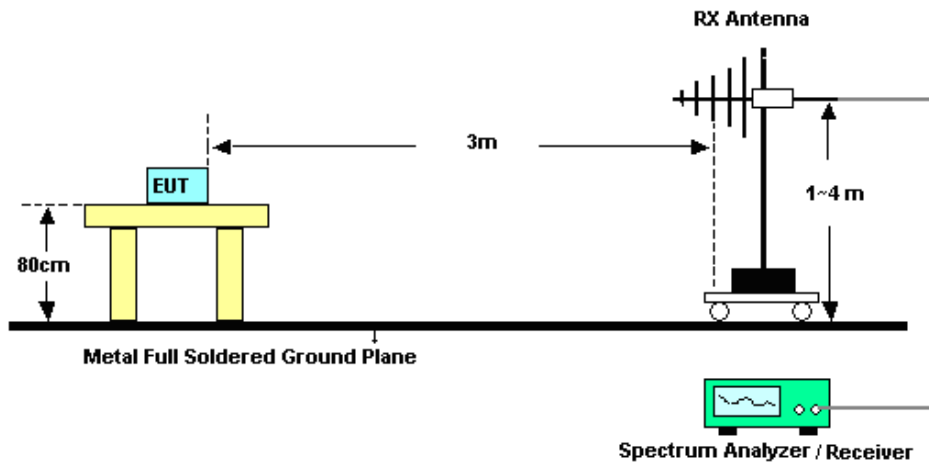

For radiated emissions above 1GHz

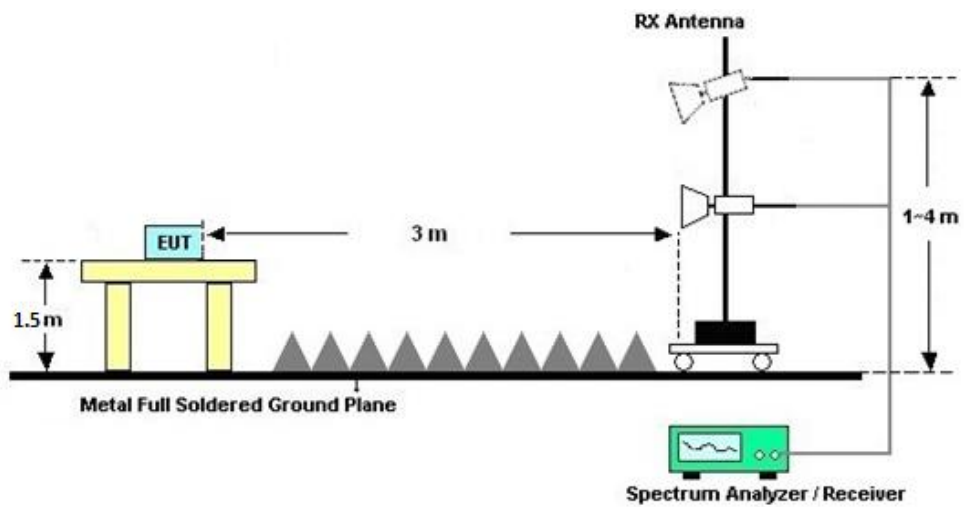



3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup



3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022	Jun. 15, 2023~ Jul. 03, 2023	Oct. 11, 2023	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2023	Jun. 15, 2023~ Jul. 03, 2023	Jan. 04, 2024	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2023	Jun. 15, 2023~ Jul. 03, 2023	Jan. 04, 2024	Conducted (TH01-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	May 16, 2023	Jun. 29, 2023	May 15, 2024	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2022	Jun. 29, 2023	Oct. 12, 2023	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 16, 2023	Jun. 29, 2023	May 15, 2024	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2022	Jun. 29, 2023	Oct. 11, 2023	Conduction (CO01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 13, 2022	Jun. 15, 2023~ Jul. 17, 2023	Oct. 12, 2023	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY60242126	10Hz~44GHz	Oct. 13, 2022	Jun. 15, 2023~ Jul. 17, 2023	Oct. 12, 2023	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 16, 2022	Jun. 15, 2023~ Jul. 17, 2023	Oct. 15, 2023	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz~1GHz	Apr. 09, 2023	Jun. 15, 2023~ Jul. 17, 2023	Apr. 08, 2024	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 06, 2023	Jun. 15, 2023~ Jul. 17, 2023	Apr. 05, 2024	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 08, 2023	Jun. 15, 2023~ Jul. 17, 2023	Jan. 07, 2024	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	380827	9KHz ~1GHZ	Jul. 11, 2022	Jun. 15, 2023~ Jul. 17, 2023	Jul. 10, 2023	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	380827	9KHz ~1GHZ	Jul. 09, 2023	Jun. 15, 2023~ Jul. 17, 2023	Jul. 08, 2024	Radiation (03CH06-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 05, 2023	Jun. 15, 2023~ Jul. 17, 2023	Jan. 04, 2024	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2082395	1Ghz-18Ghz	Jan. 05, 2023	Jun. 15, 2023~ Jul. 17, 2023	Jan. 04, 2024	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270319	500MHz~26.5GHz	Oct. 12, 2022	Jun. 15, 2023~ Jul. 17, 2023	Oct. 12, 2023	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jun. 15, 2023~ Jul. 17, 2023	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jun. 15, 2023~ Jul. 17, 2023	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jun. 15, 2023~ Jul. 17, 2023	NCR	Radiation (03CH06-KS)

NCR: No Calibration Required



5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±0.46 dB
Conducted Emissions	±2.26 dB
Occupied Channel Bandwidth	±0.001 %
Conducted Power Spectral Density	±0.88 dB

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.94 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.26 dB
---	---------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.02 dB
---	---------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.26 dB
---	---------

----- THE END -----



Appendix A. Conducted Test Results



Ambient Condition: <u>25 °C, 45 %RH</u>
According Standard: <u>■Part15C</u>
Test Date: <u>2023/6/15~2023/7/3</u> Test Engineer: <u>Jiang Jun</u>


DTS Bandwidth


Test Result


TestMode	Freq(MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	2412	8.04	2408.00	2416.04	0.5	PASS
	2437	8.56	2432.96	2441.52	0.5	PASS
	2462	8.56	2457.48	2466.04	0.5	PASS
11G	2412	16.36	2403.84	2420.20	0.5	PASS
	2417	15.20	2409.72	2424.92	0.5	PASS
	2437	16.36	2428.84	2445.20	0.5	PASS
	2462	16.32	2453.84	2470.16	0.5	PASS
11N20SISO	2412	17.56	2403.24	2420.80	0.5	PASS
	2417	14.16	2410.36	2424.52	0.5	PASS
	2437	17.56	2428.24	2445.80	0.5	PASS
	2462	17.60	2453.20	2470.80	0.5	PASS





Test Graphs

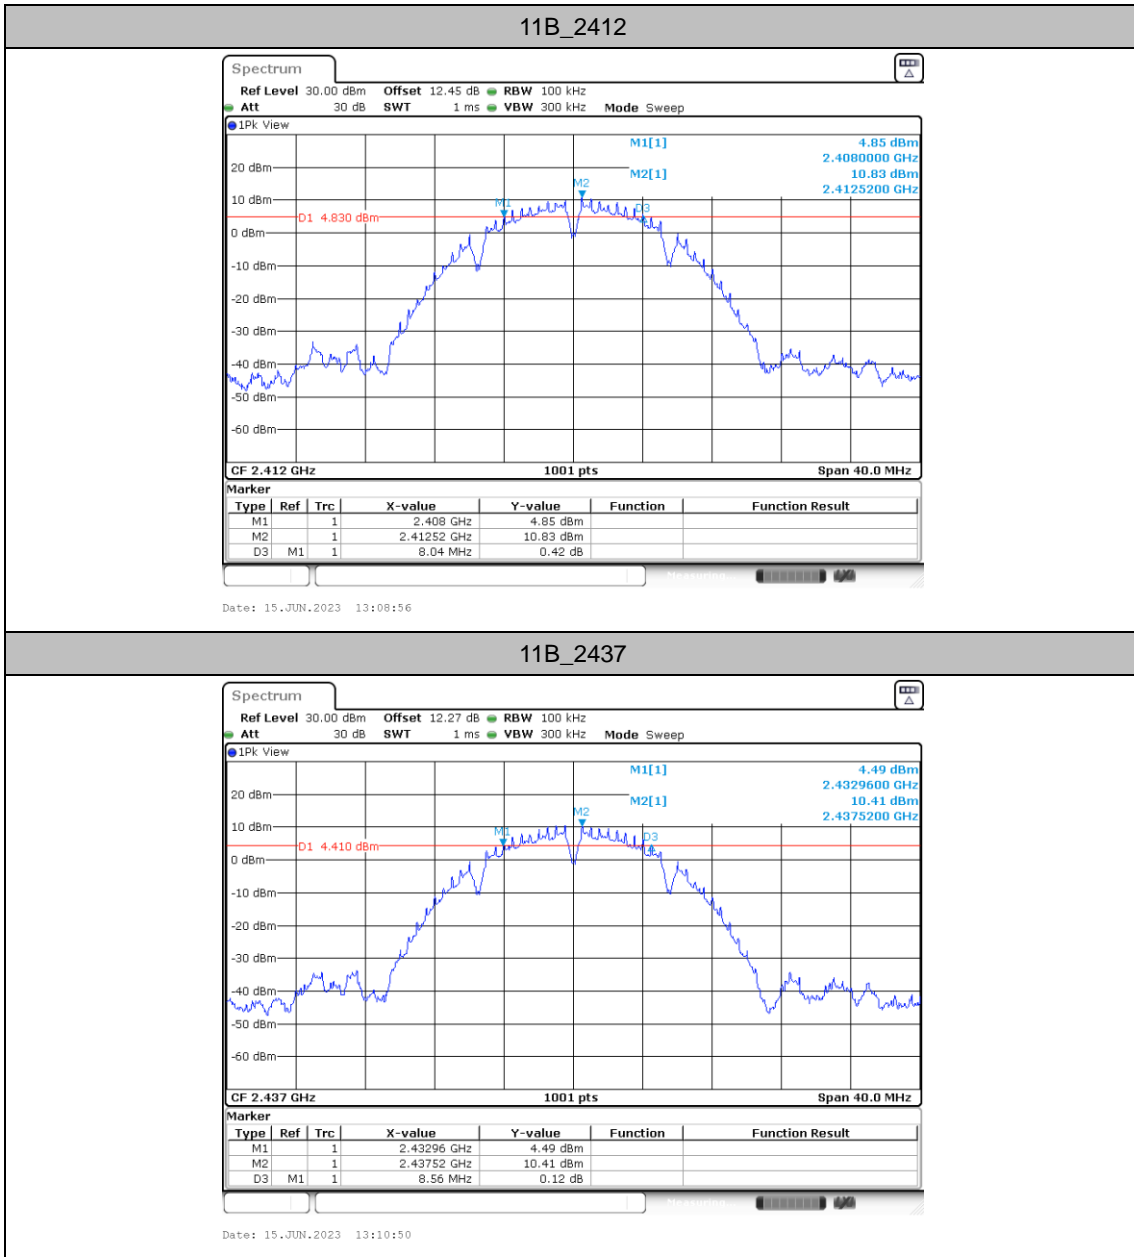


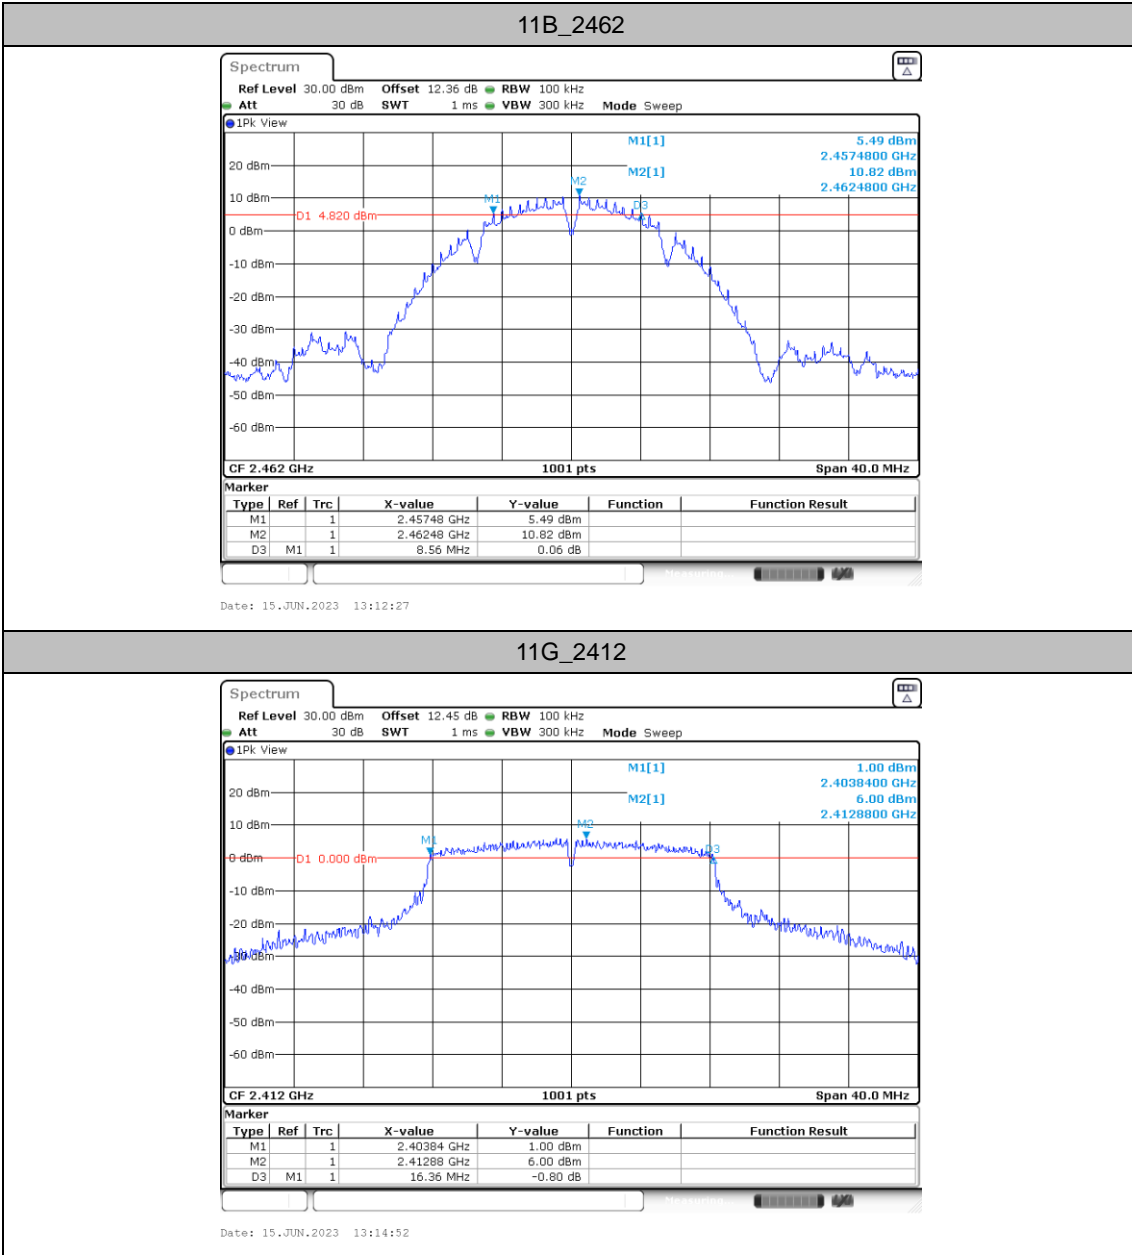
11G_2412

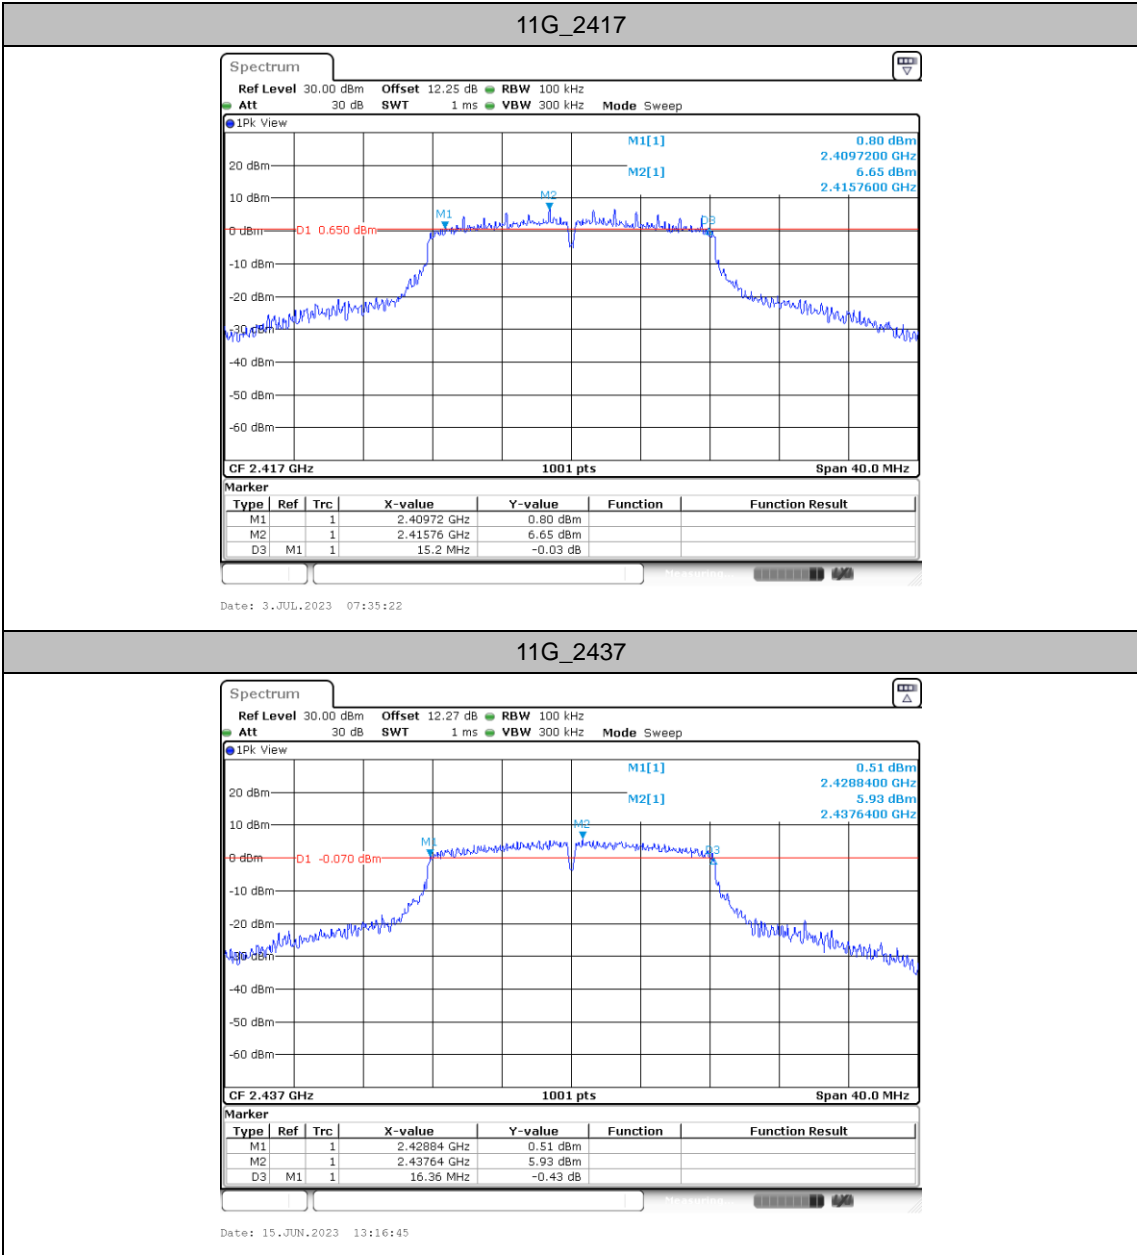

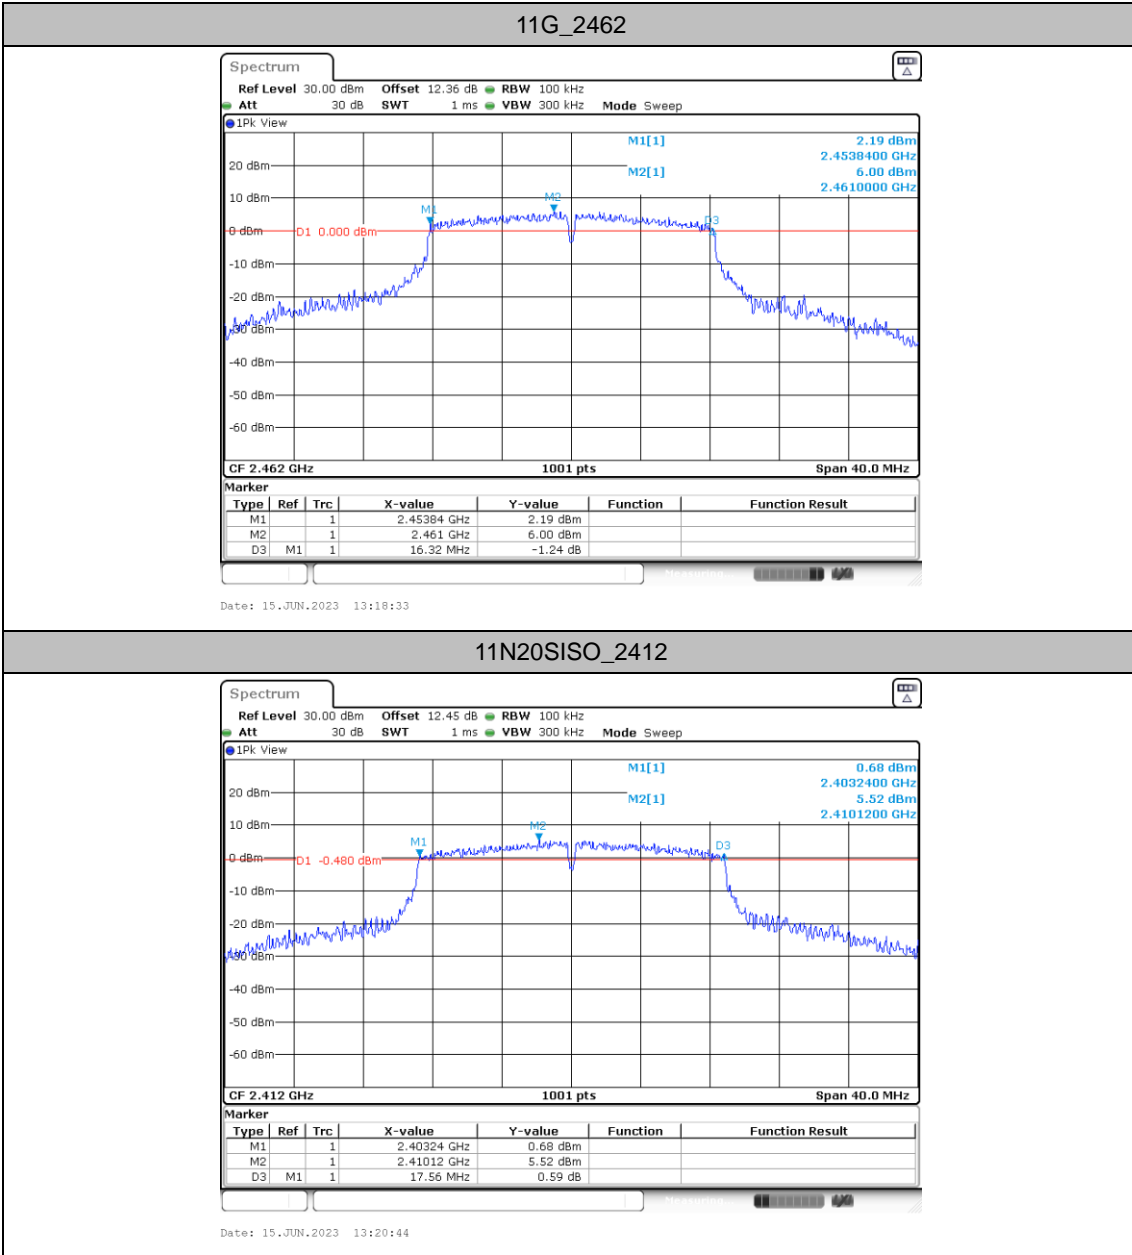

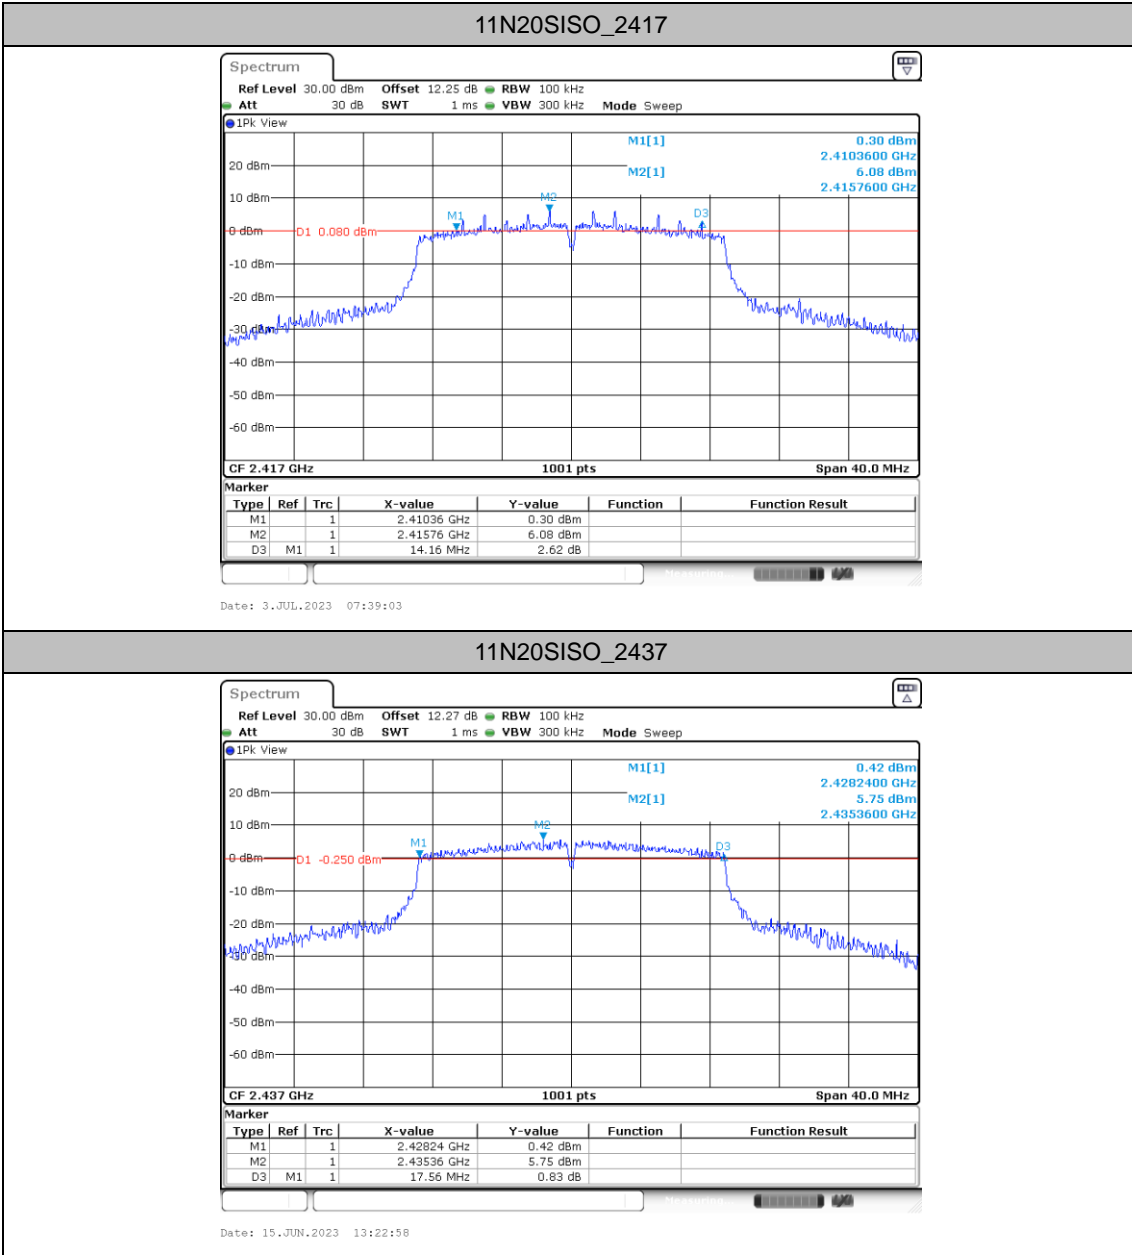

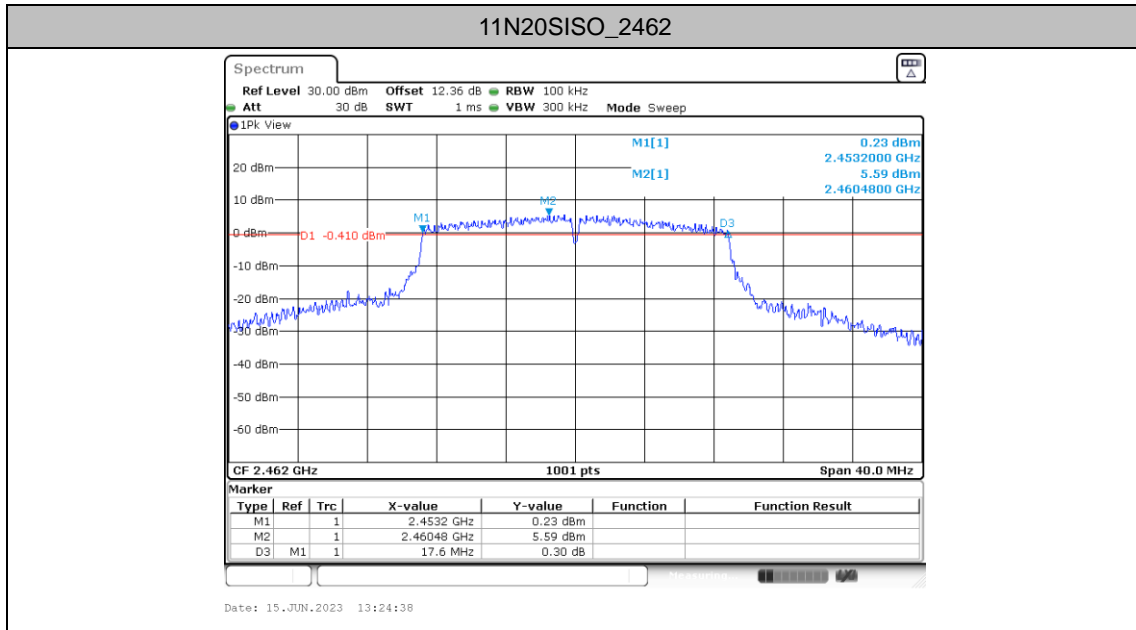




Occupied Channel Bandwidth

Test Result

TestMode	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]
11B	2412	13.147	2405.4865	2418.6334
	2437	13.187	2430.4066	2443.5934
	2462	13.307	2455.2468	2468.5534
11G	2412	17.822	2403.2088	2421.0310
	2417	17.622	2408.2488	2425.8711
	2437	17.622	2428.1688	2445.7912
	2462	17.662	2453.0490	2470.7113
11N20SISO	2412	18.462	2402.8492	2421.3107
	2417	18.382	2407.8092	2426.1908
	2437	18.422	2427.8092	2446.2308
	2462	18.422	2452.6893	2471.1109




Test Graphs

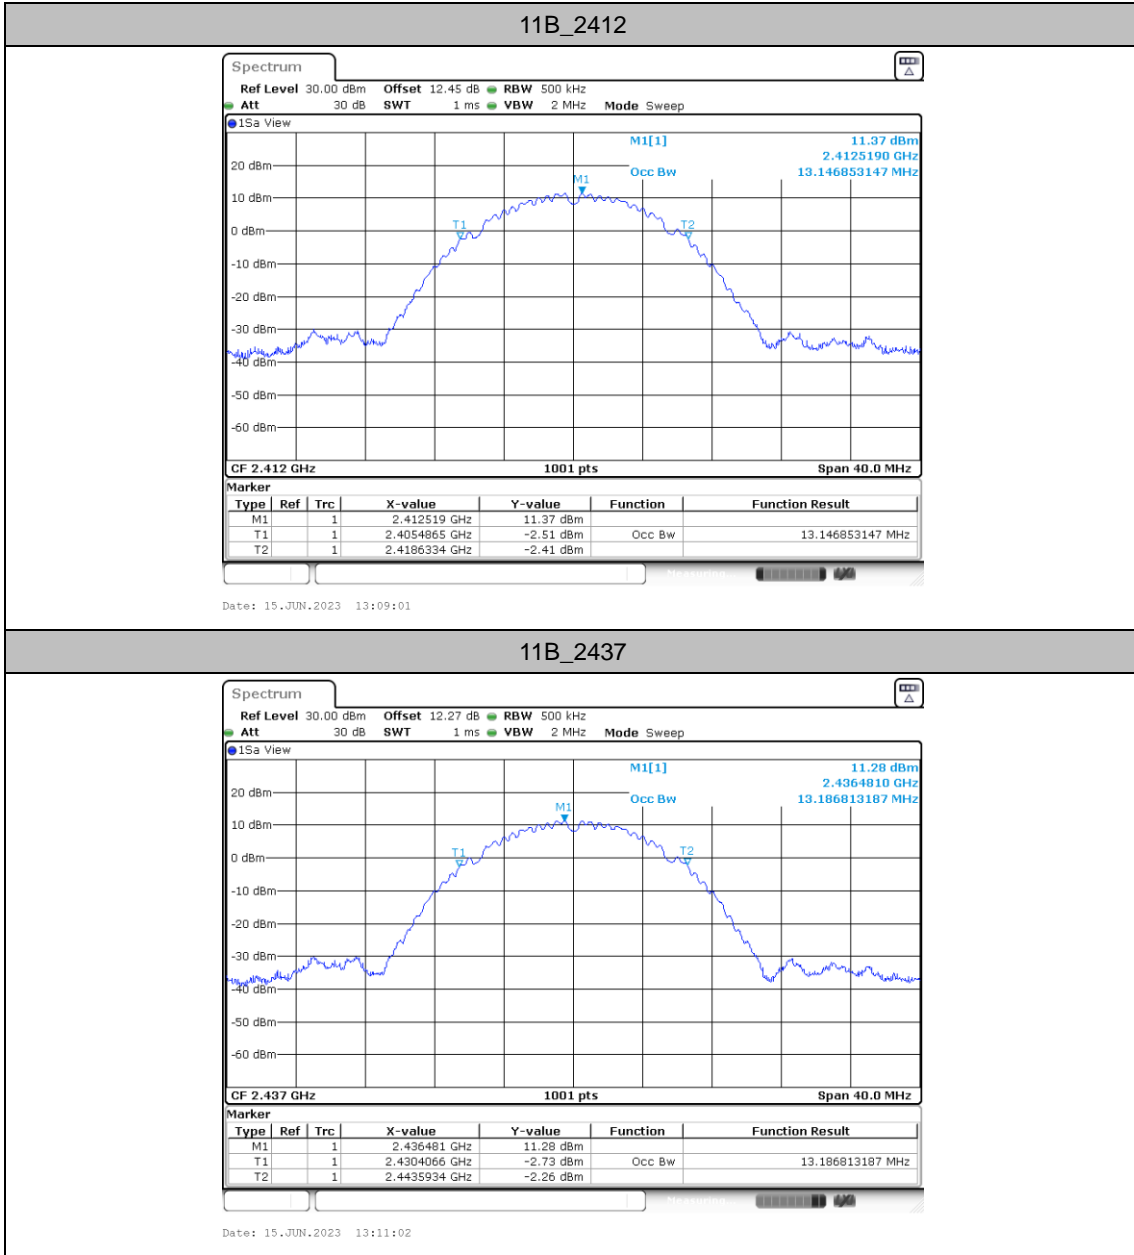




11B_2462

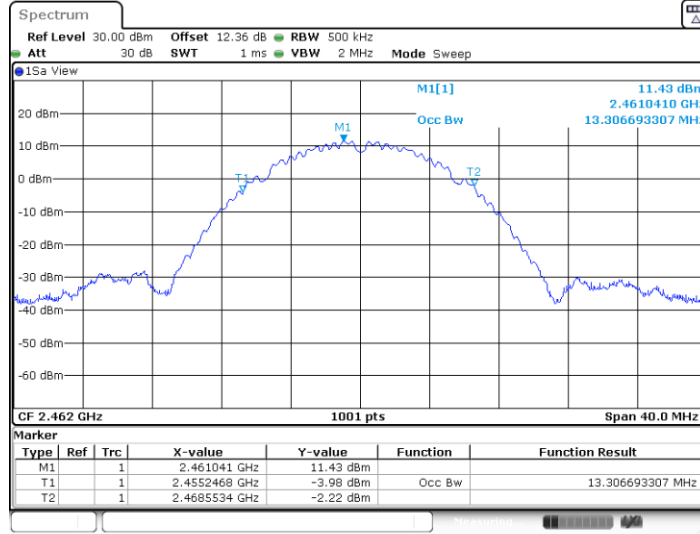



Date: 15.JUN.2023 13:12:42

11G_2412

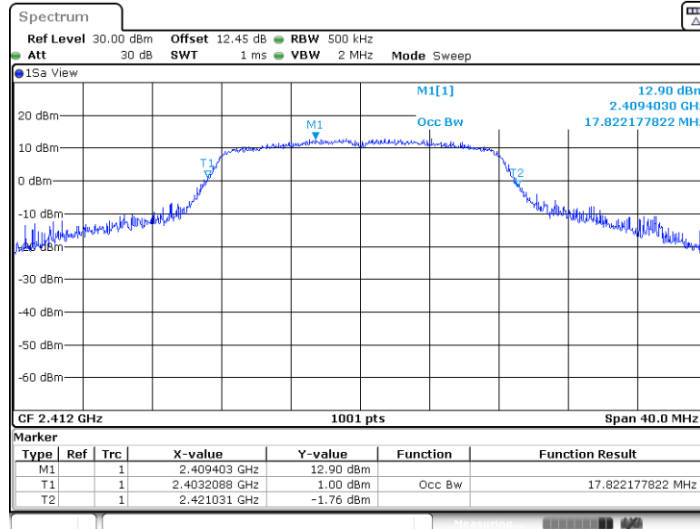


Date: 15.JUN.2023 13:15:06

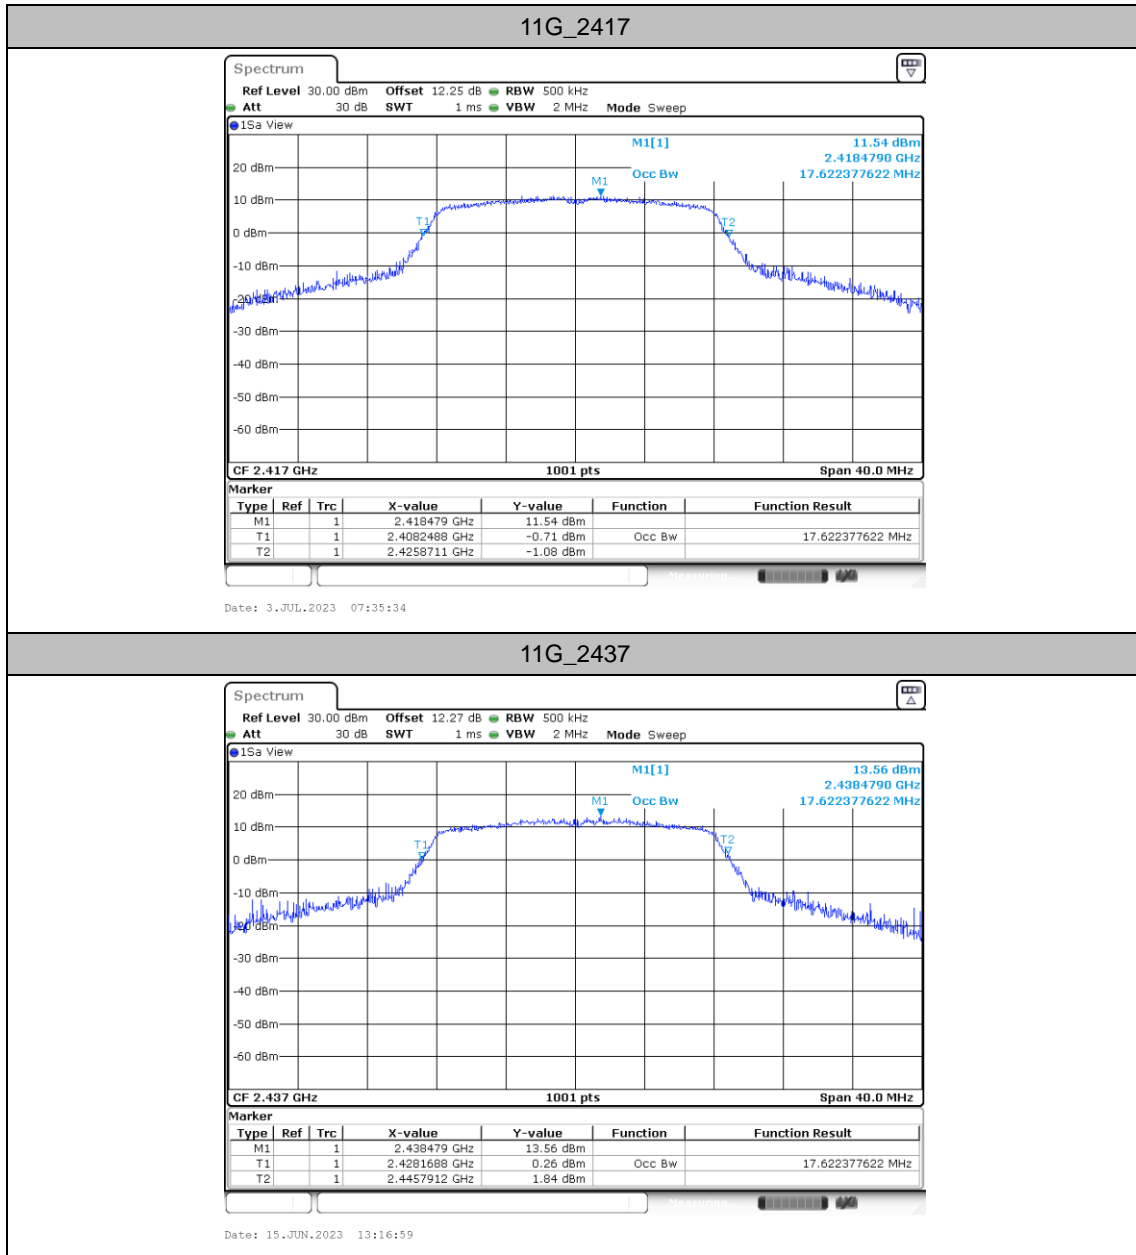
11G_2437

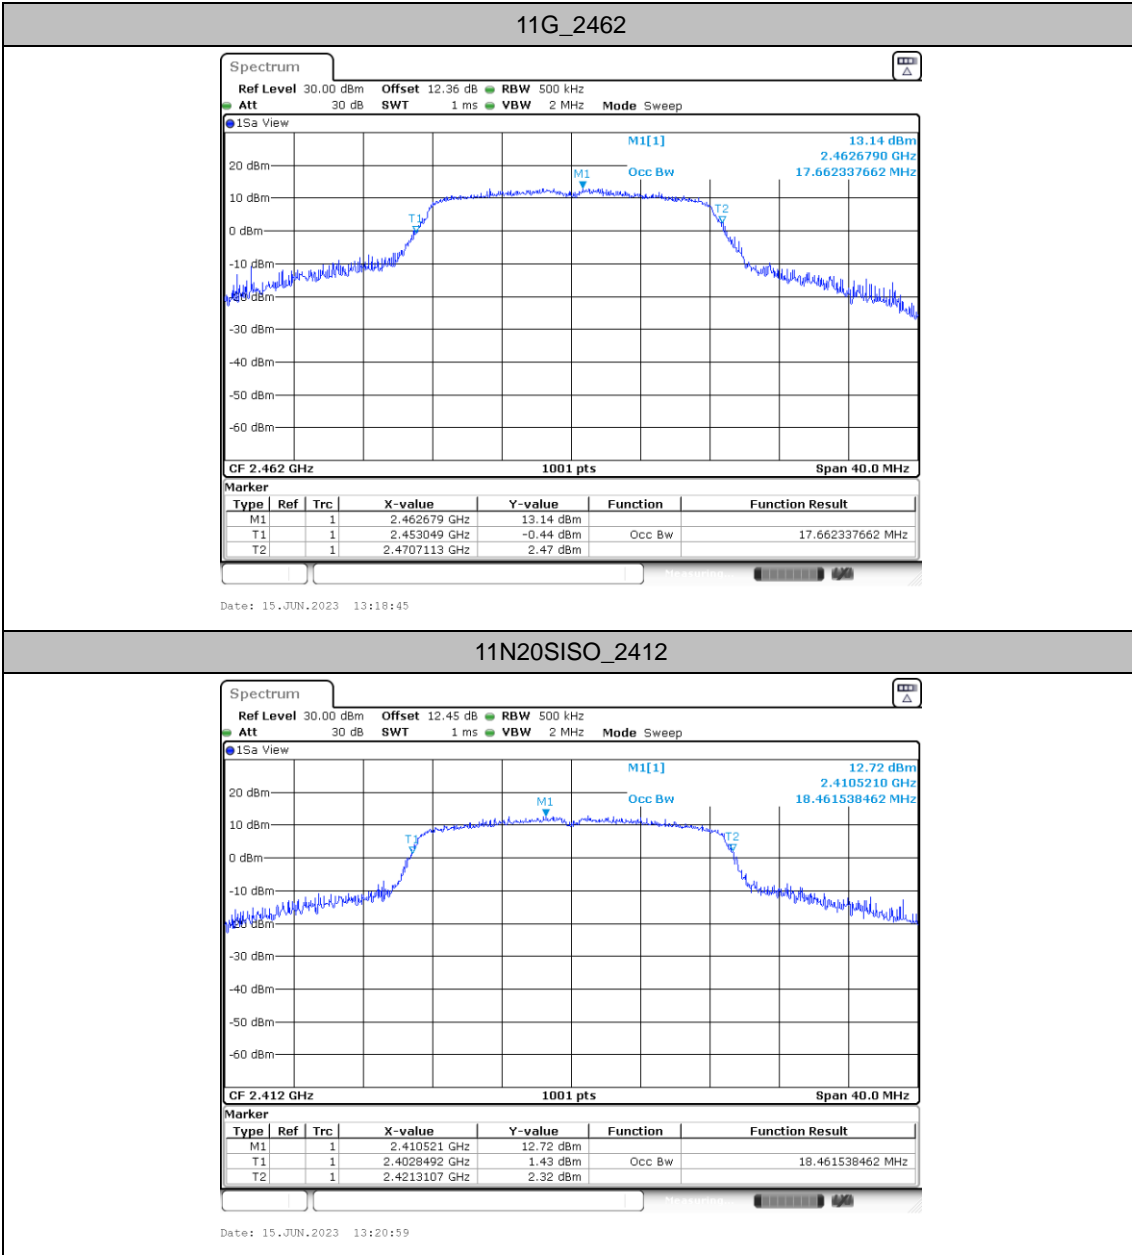





11N20SISO_2417

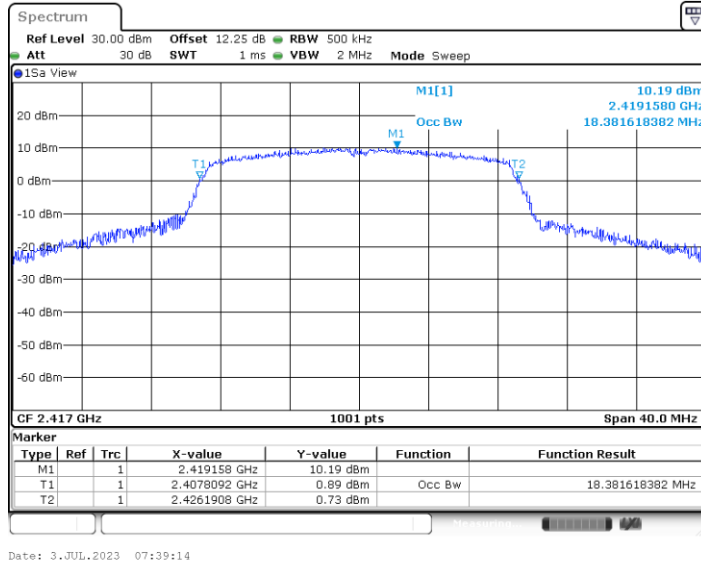

11N20SISO_2437

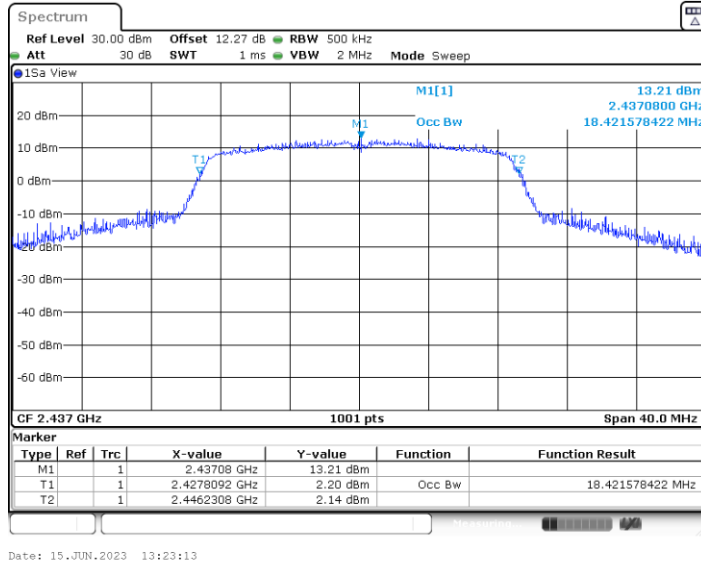

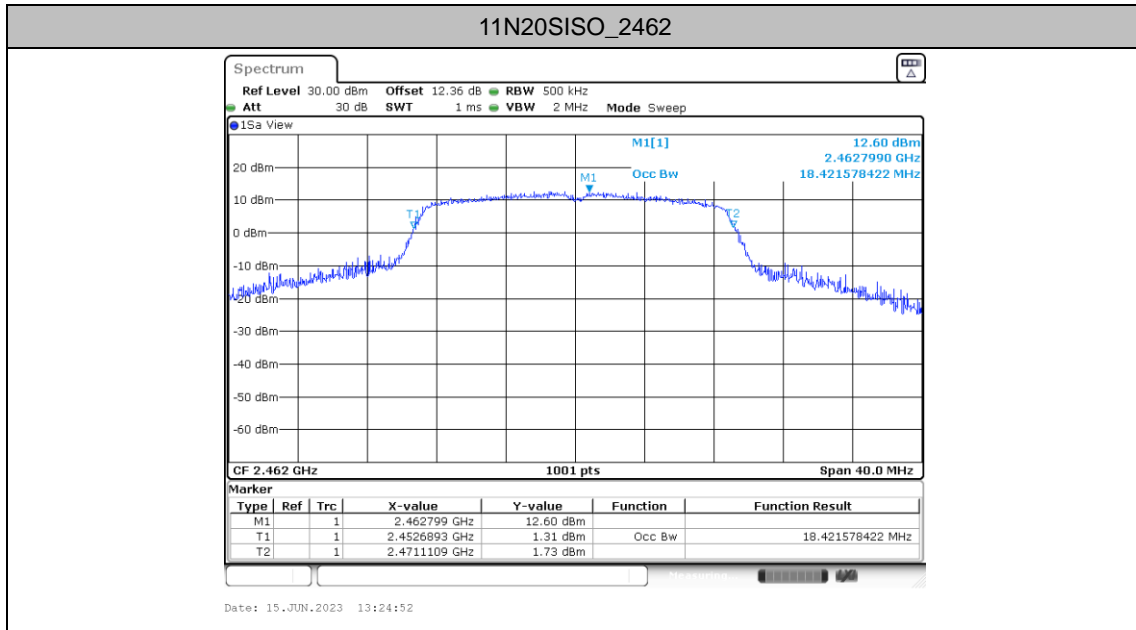


Maximum power spectral density


Test Result


TestMode	Freq(MHz)	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
11B	2412	-2.26	≤8.00	PASS
	2437	-3.33	≤8.00	PASS
	2462	-2.59	≤8.00	PASS
11G	2412	-9.78	≤8.00	PASS
	2417	-7.02	≤8.00	PASS
	2437	-5.4	≤8.00	PASS
	2462	-8.89	≤8.00	PASS
11N20SISO	2412	-10.38	≤8.00	PASS
	2417	-8.21	≤8.00	PASS
	2437	-5.84	≤8.00	PASS
	2462	-8.29	≤8.00	PASS





Test Graphs

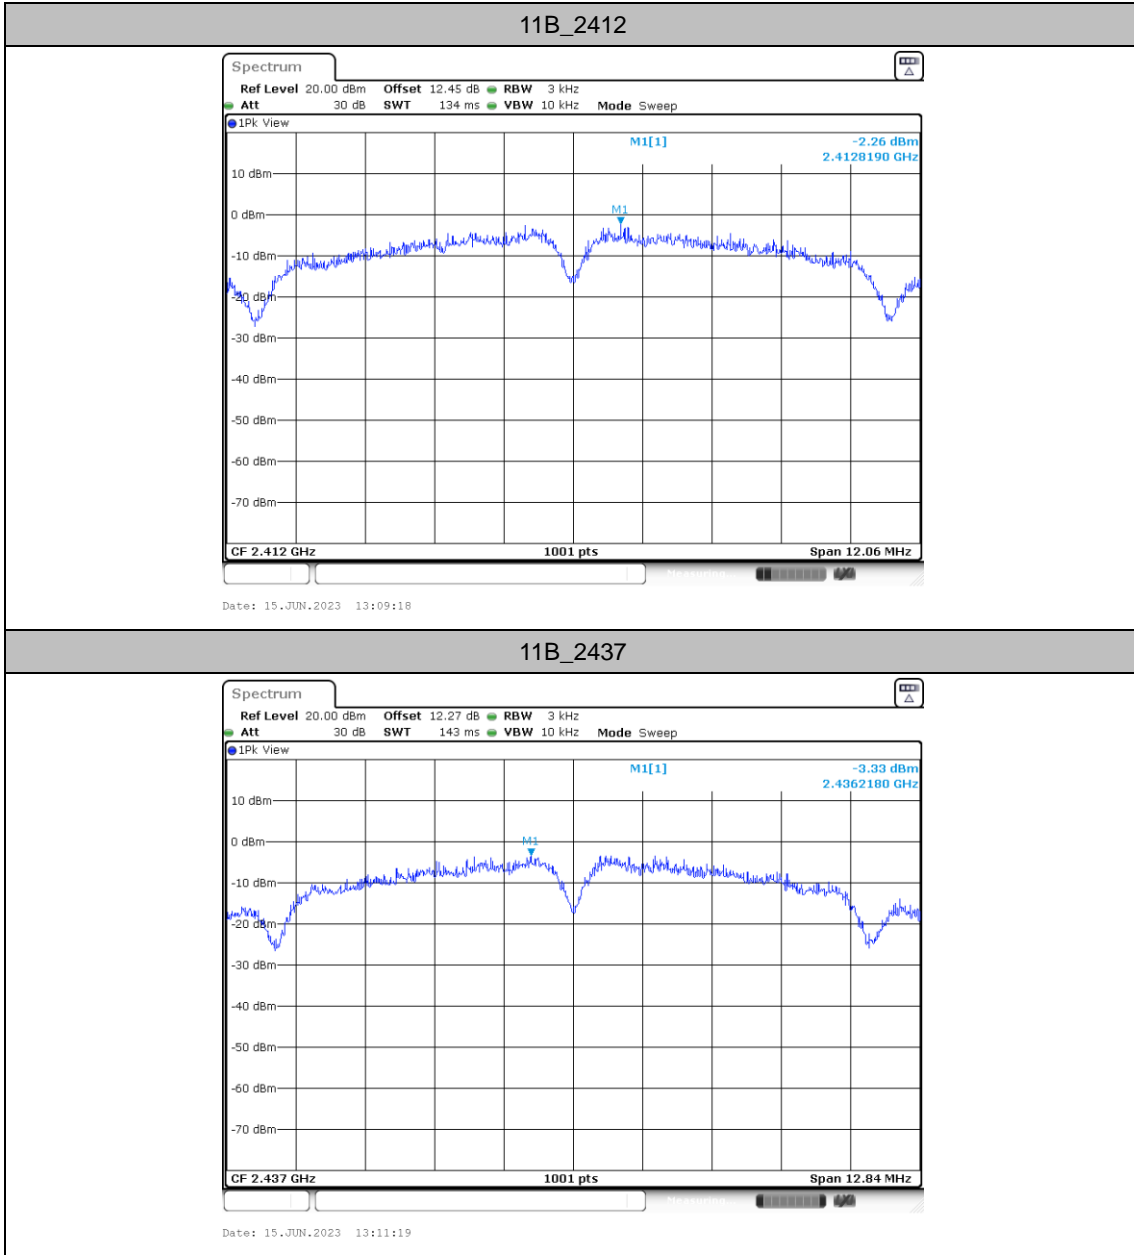


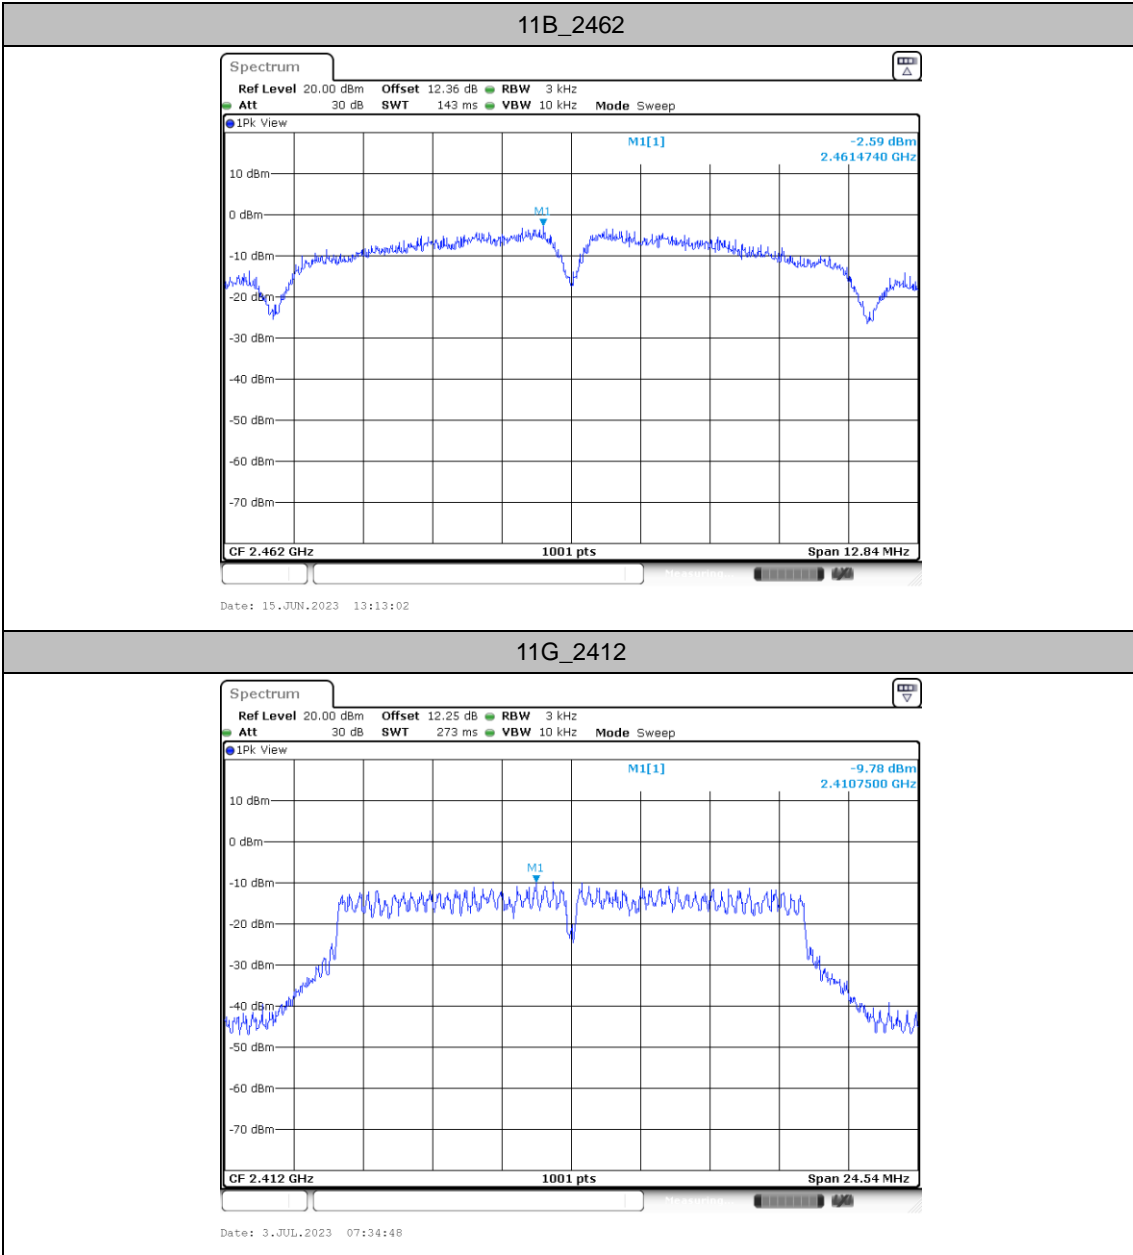

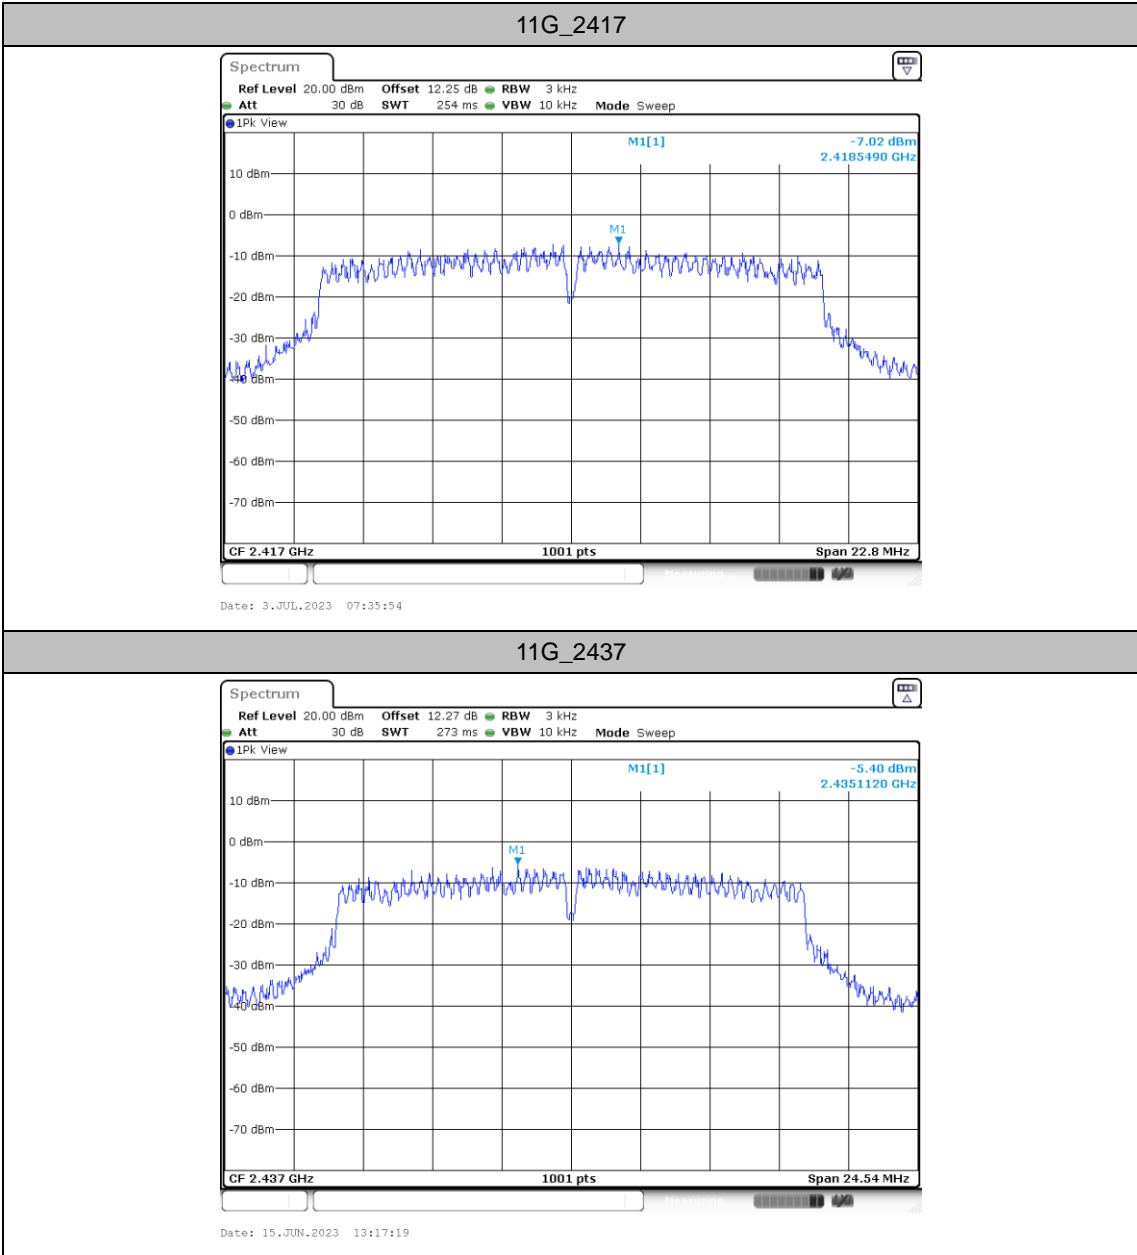

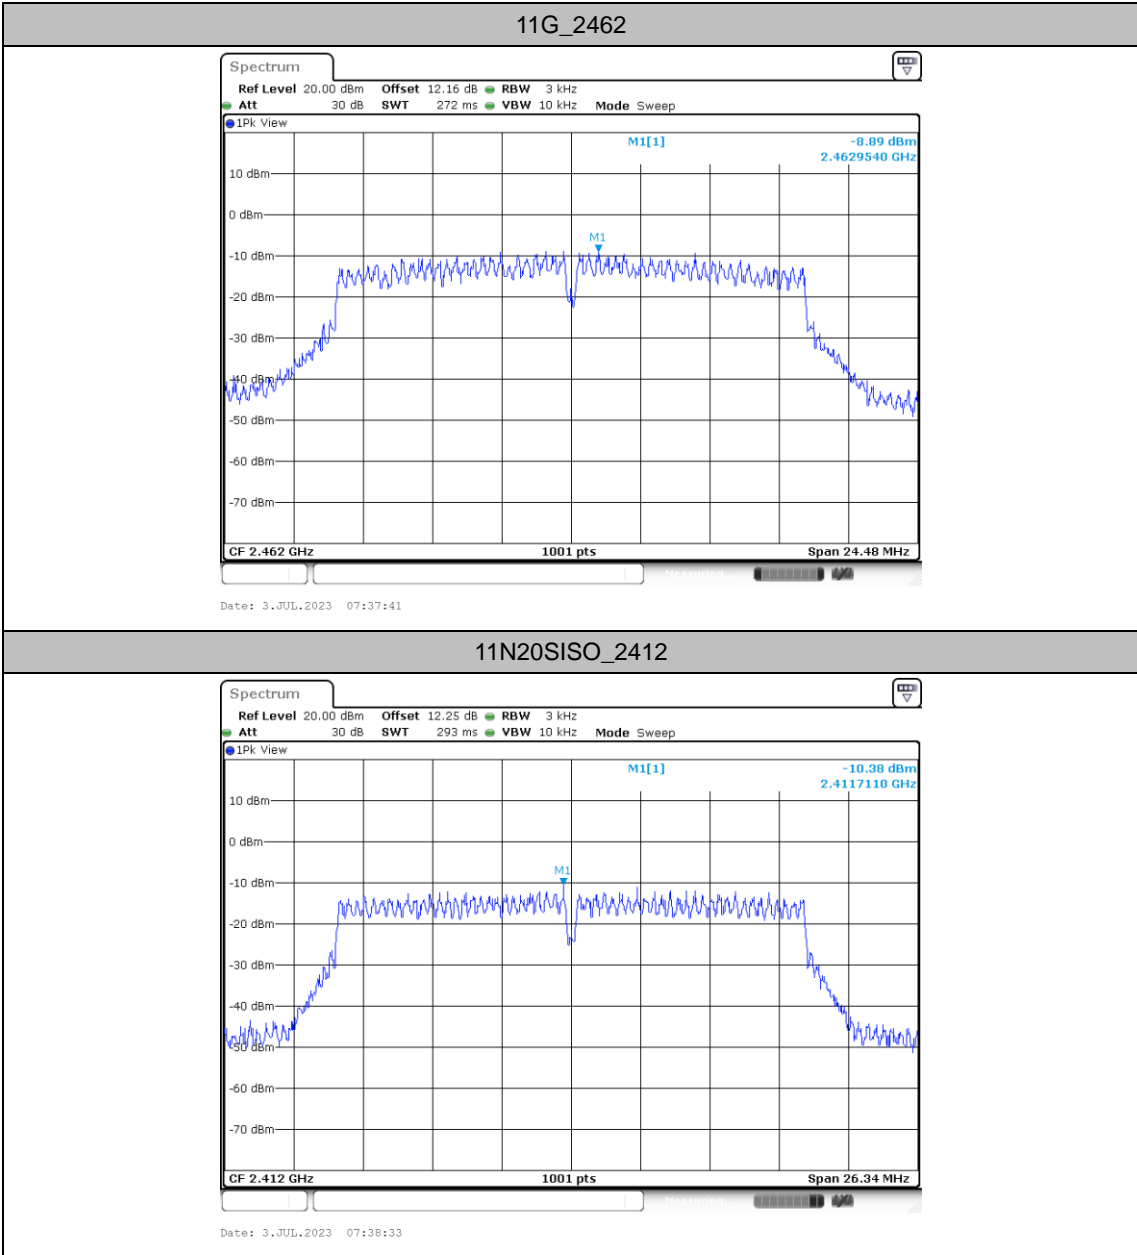

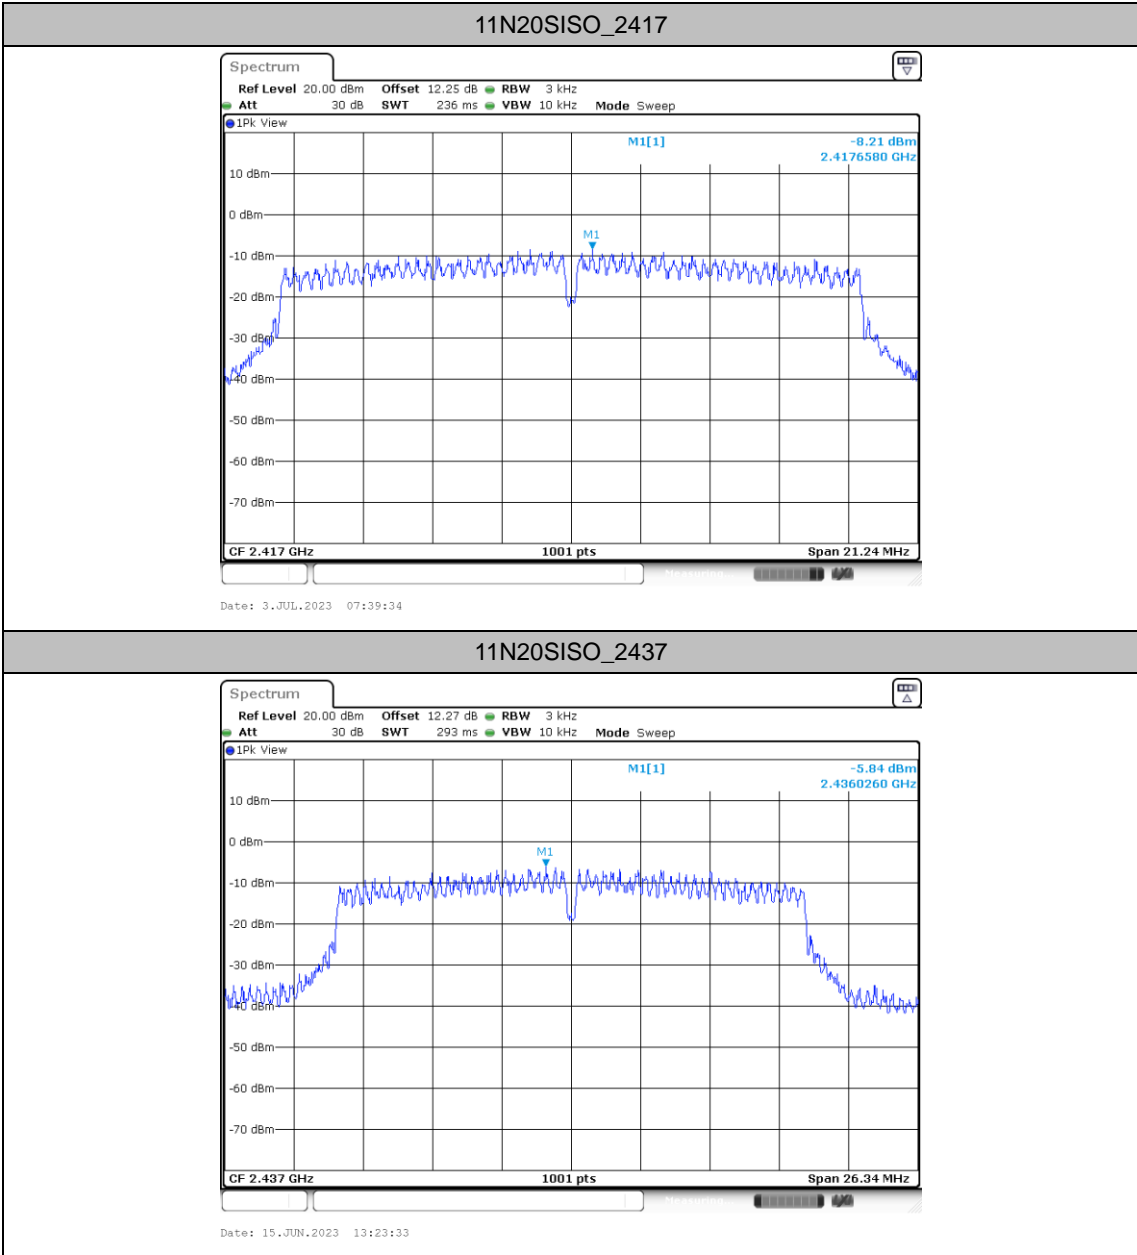

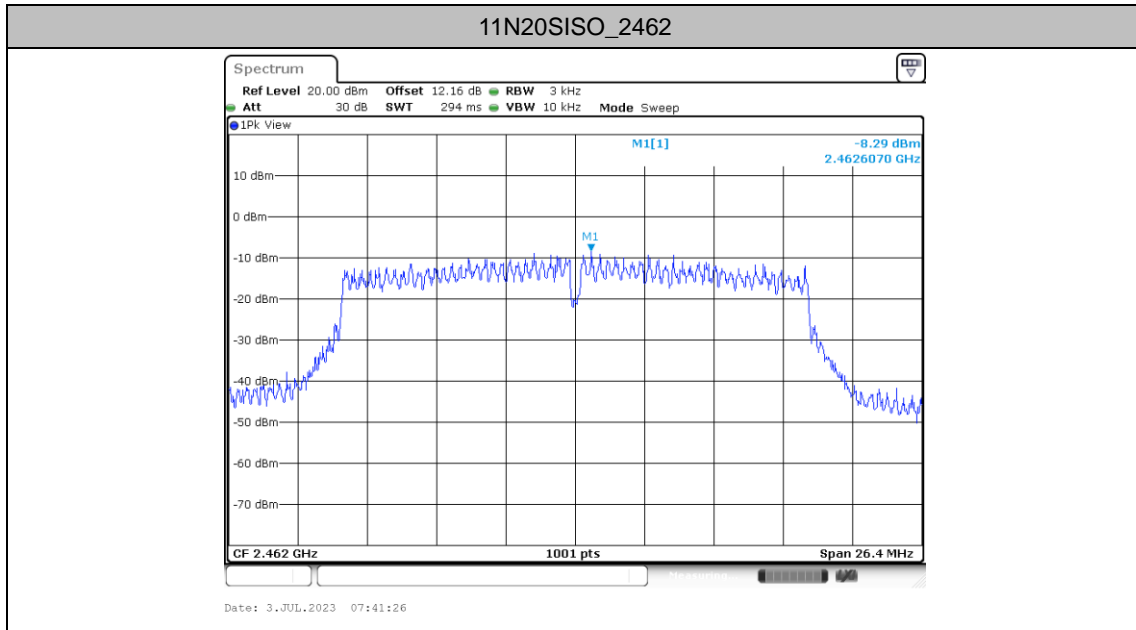




Reference level measurement


Test Result


TestMode	Freq(MHz)	Max.Point[MHz]	Result[dBm/100KHz]
11B	2412	2411.01	10.51
	2437	2436.50	11.00
	2462	2462.50	11.19
11G	2412	2411.11	6.59
	2417	2415.75	7.10
	2437	2436.01	6.06
	2462	2462.64	5.88
11N20SISO	2412	2409.90	5.33
	2417	2415.74	6.20
	2437	2436.12	5.24
	2462	2462.65	4.96





Test Graphs

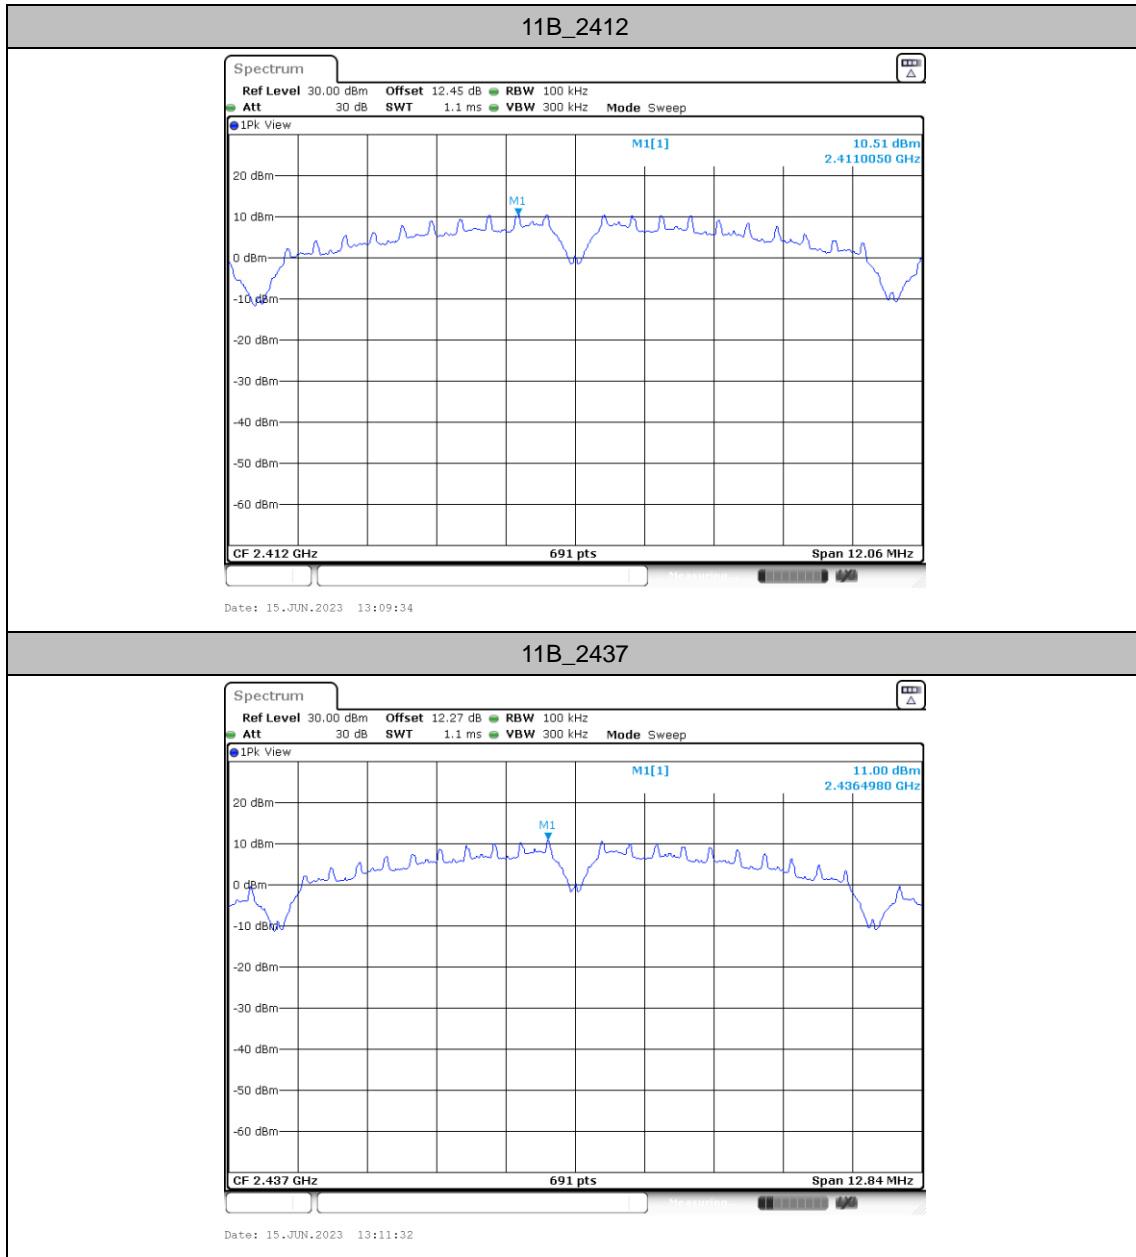


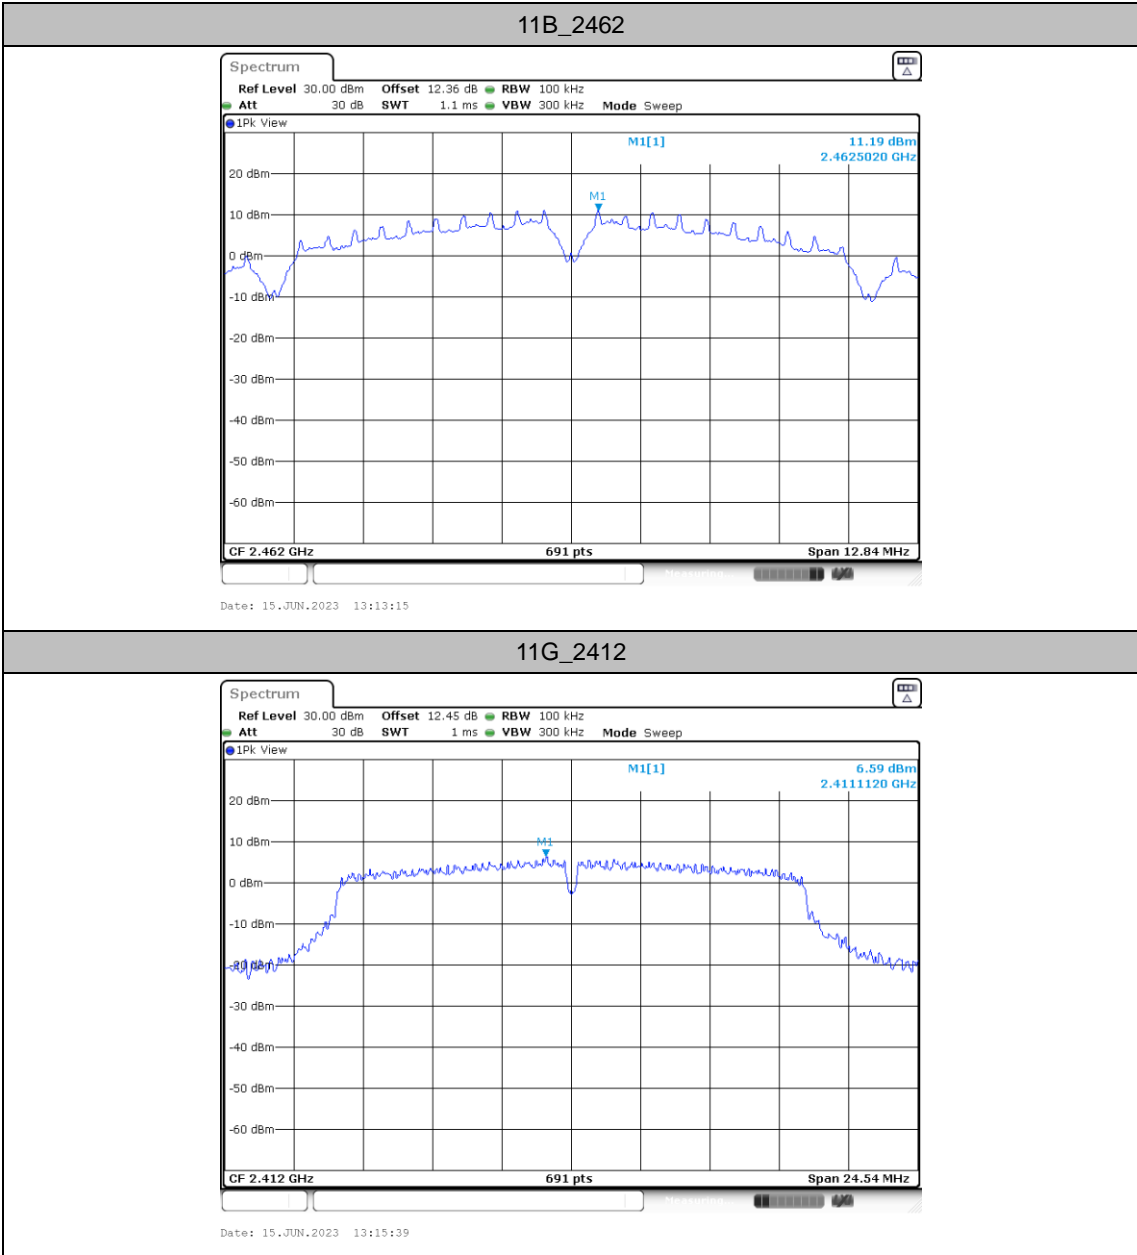

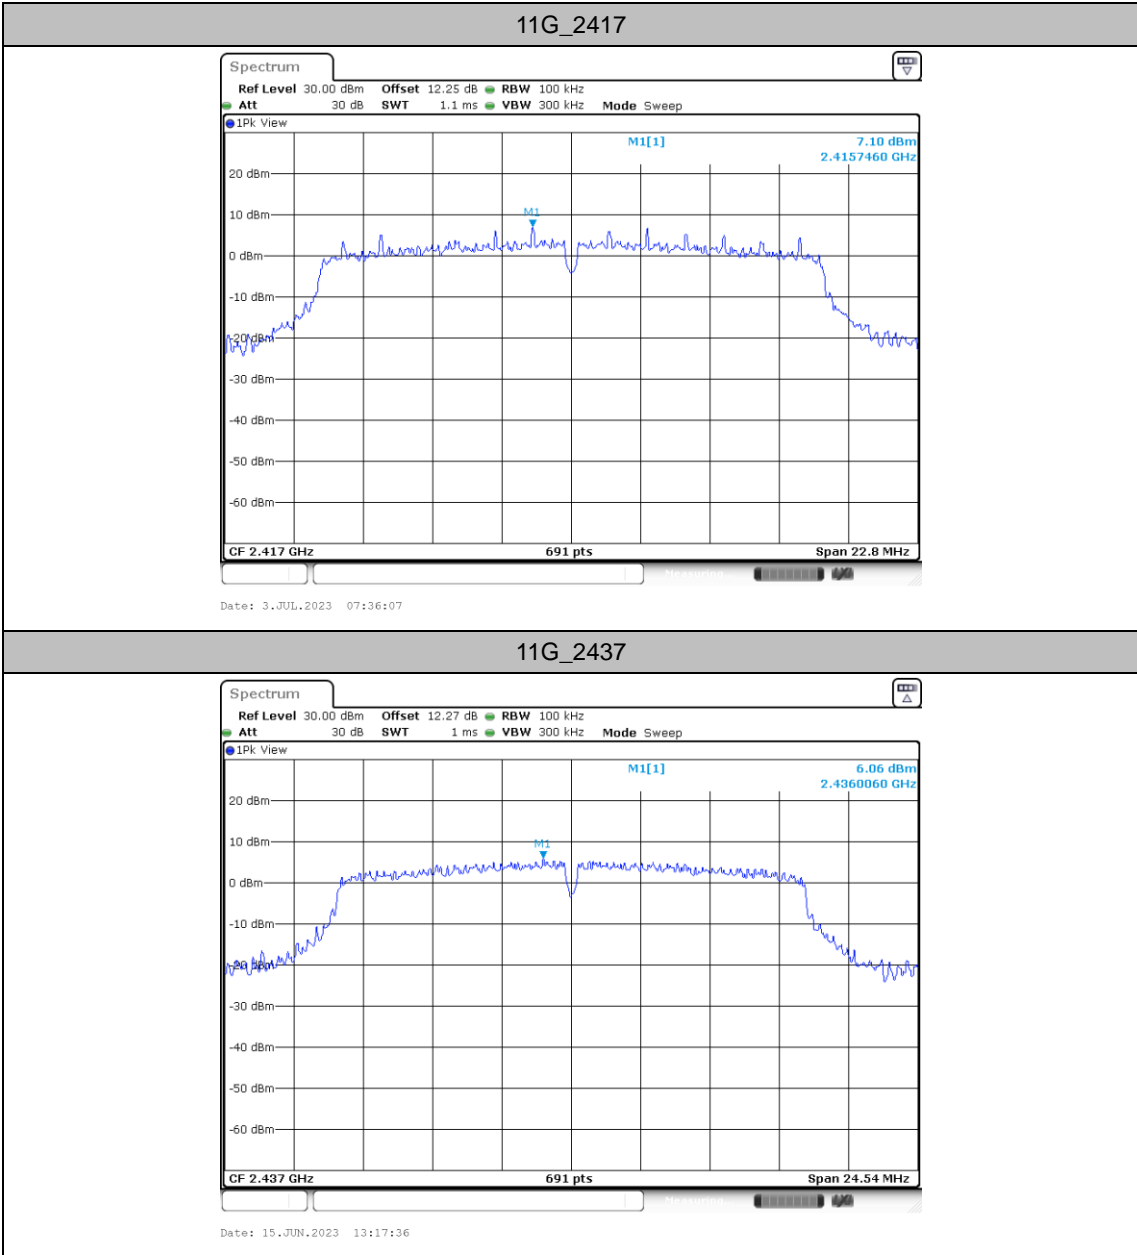

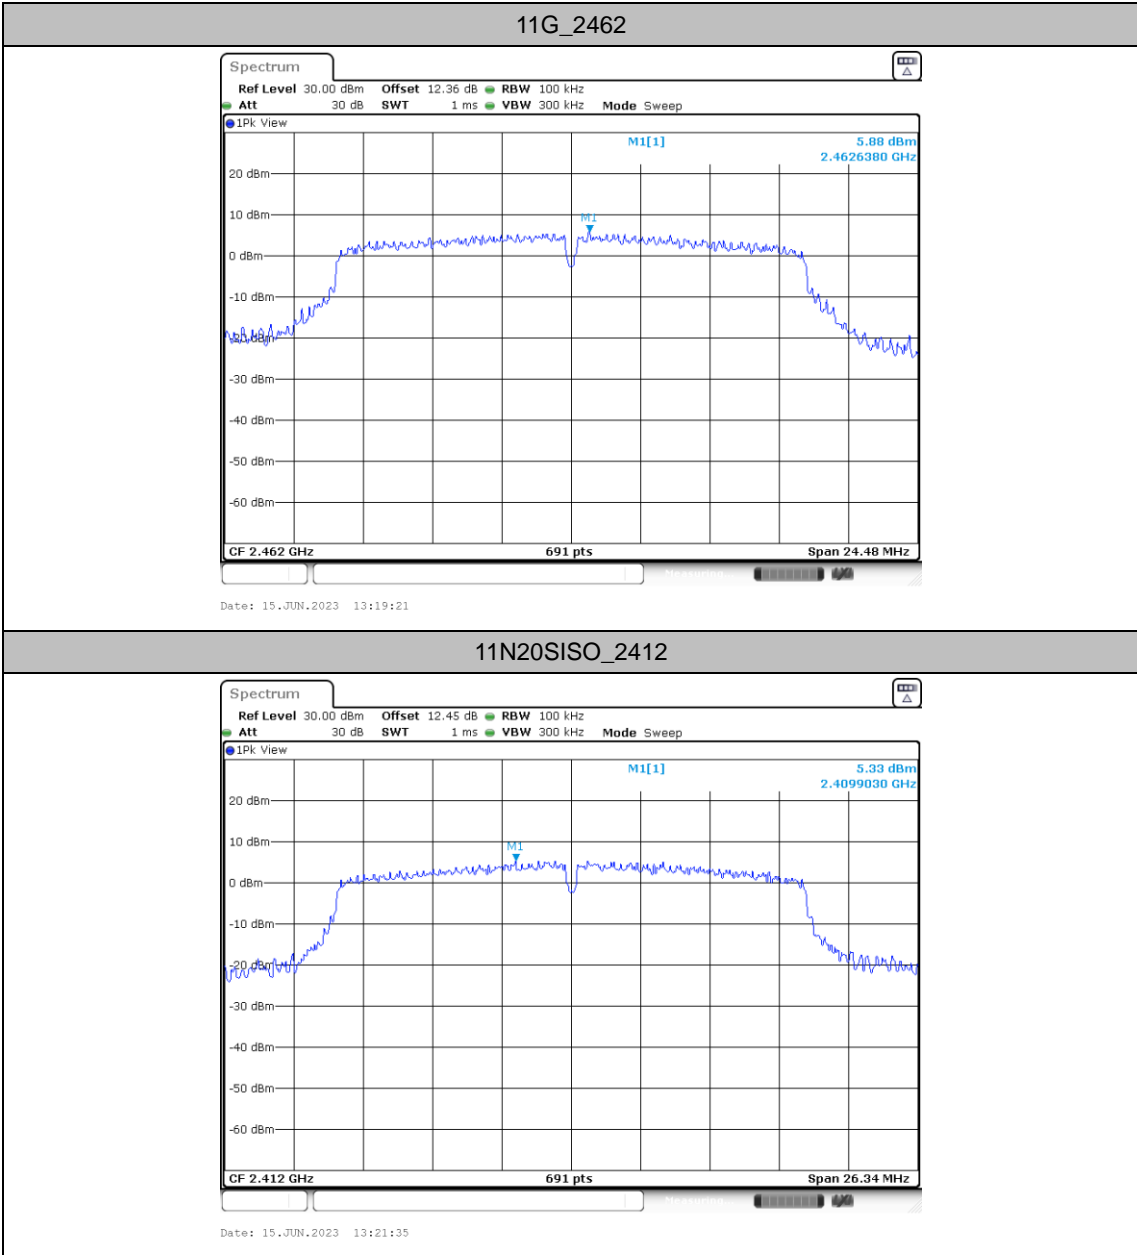

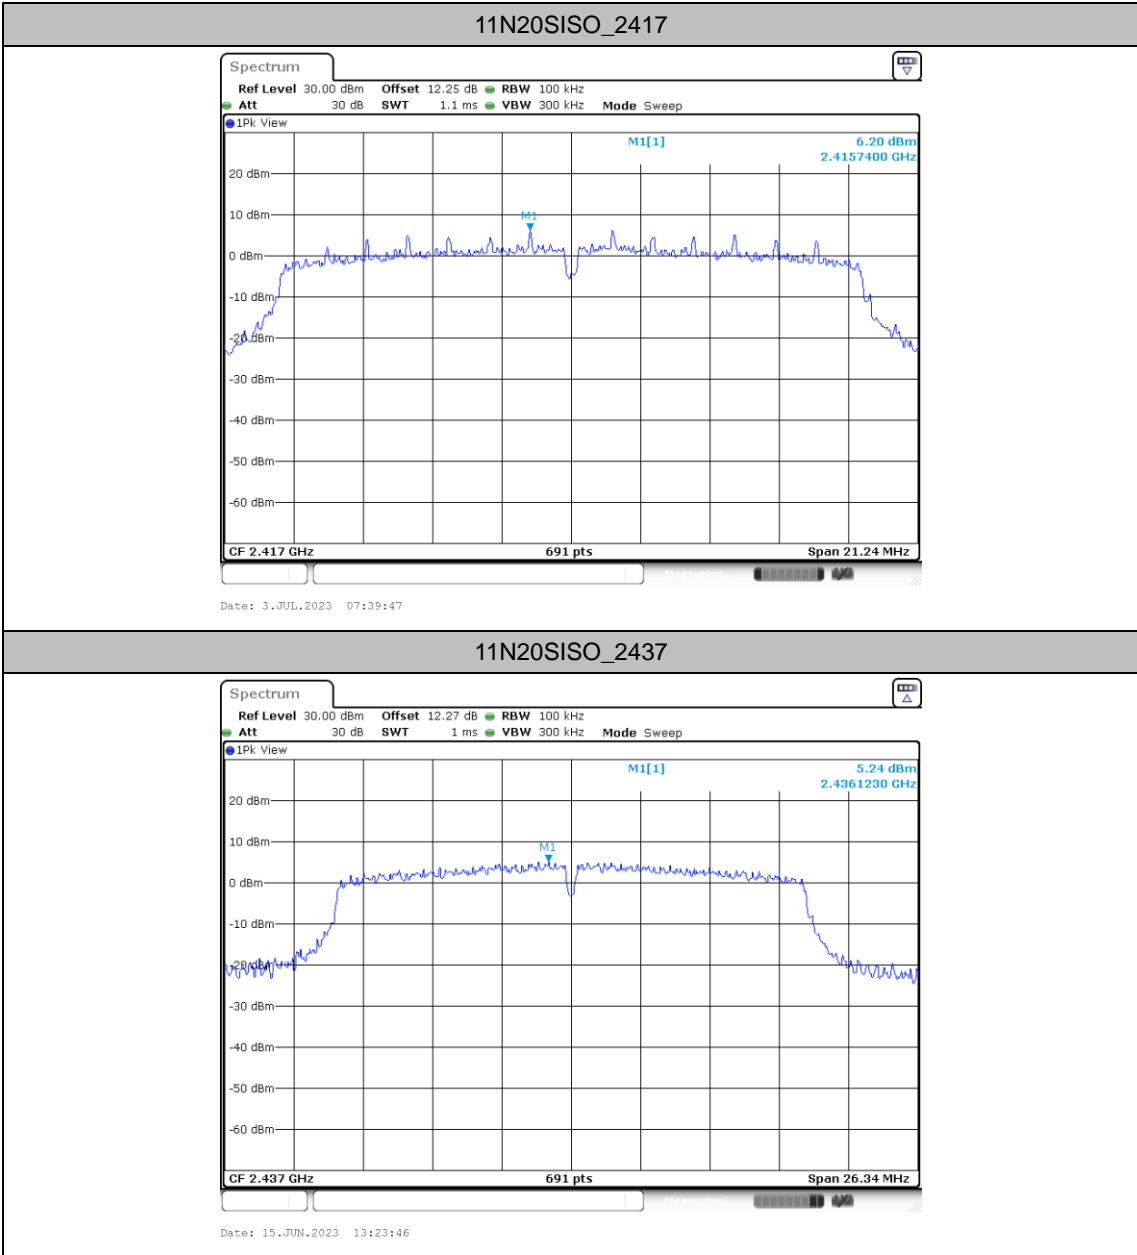

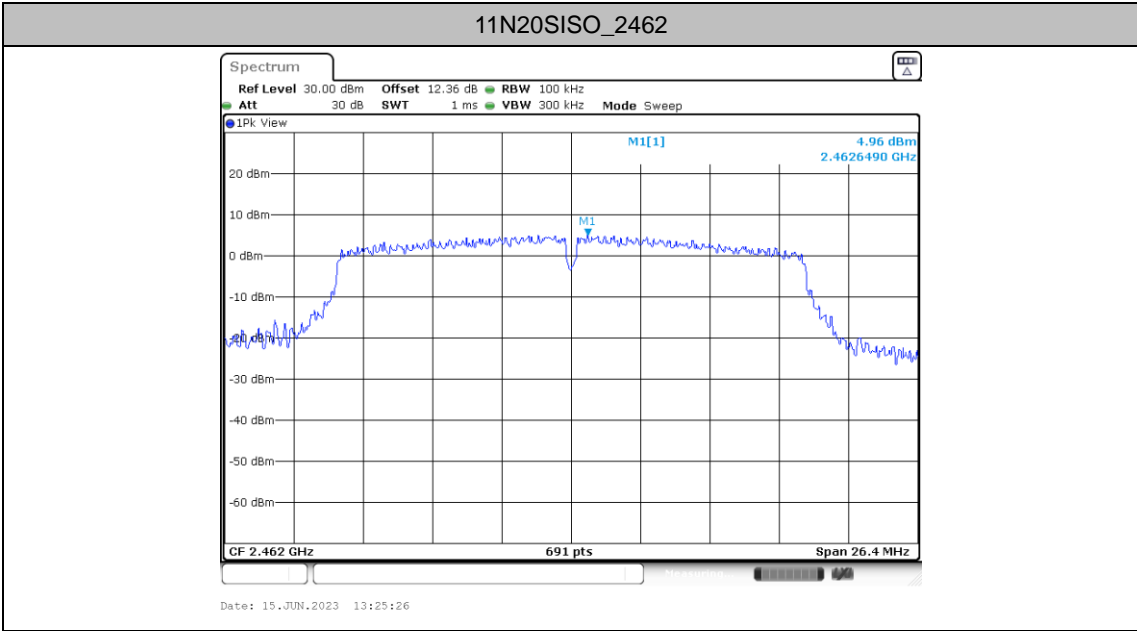


Band edge measurements


Test Result


TestMode	Ch Name	Freq (MHz)	RefLevel [dBm/100KHz]	Result [dBm/100KHz]	Limit [dBm/100KHz]	Verdict
11B	Low	2412	10.51	-33.43	≤-9.49	PASS
	High	2462	11.19	-42.43	≤-8.81	PASS
11G	Low	2412	6.59	-18.71	≤-13.41	PASS
		2417	7.10	-25.86	≤-12.9	PASS
	High	2462	5.88	-35.46	≤-14.12	PASS
11N20SISO	Low	2412	5.33	-19.92	≤-14.67	PASS
		2417	6.20	-27.37	≤-13.8	PASS
	High	2462	4.96	-34.4	≤-15.04	PASS




Test Graphs

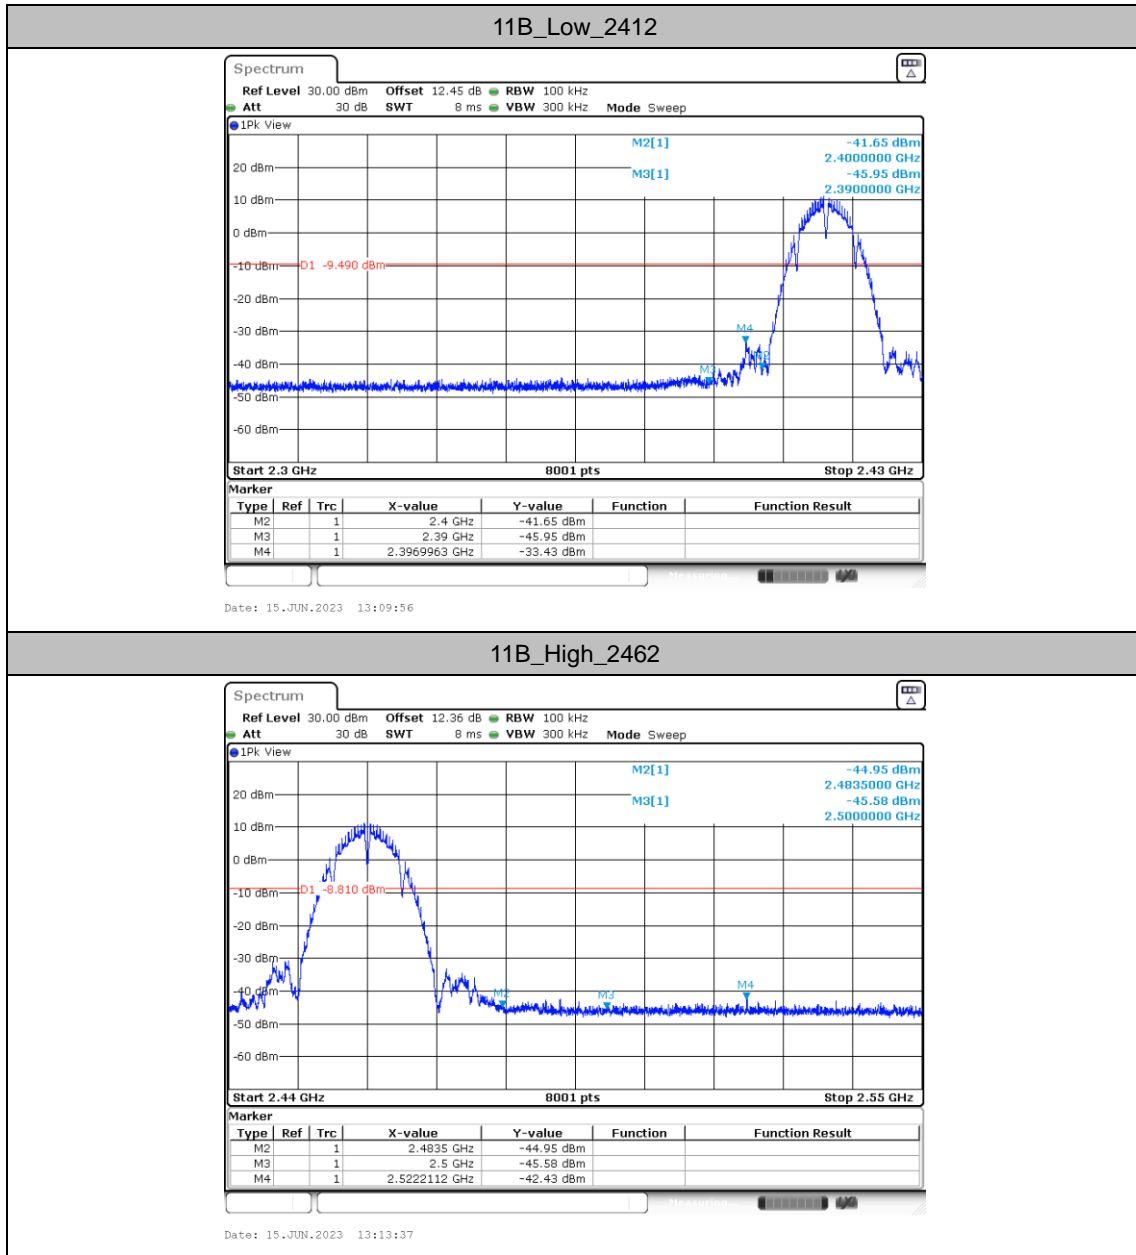

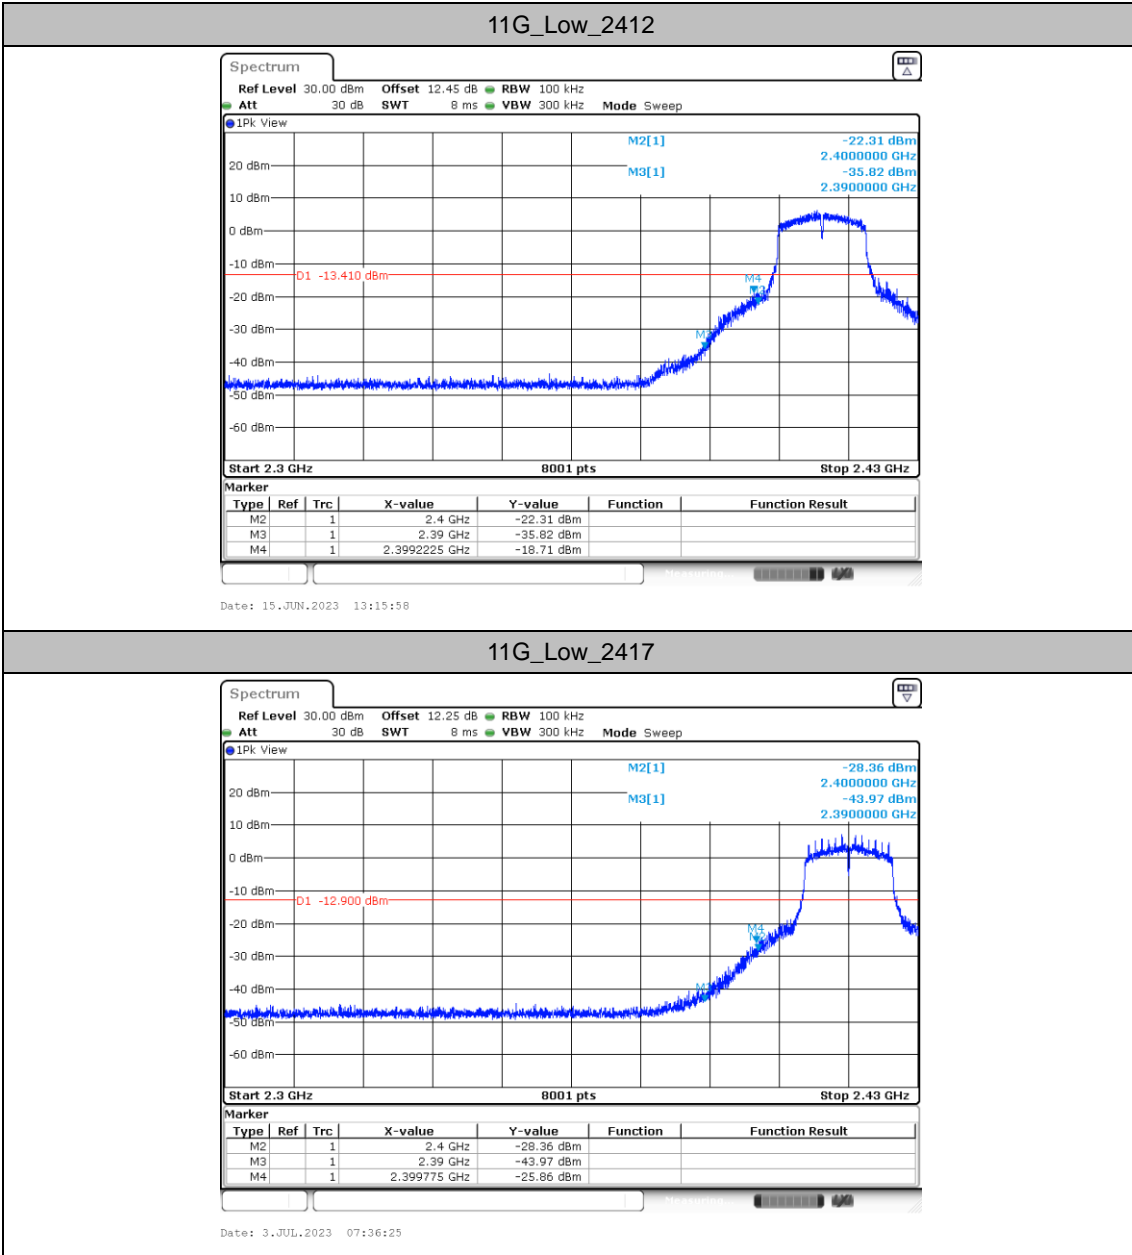

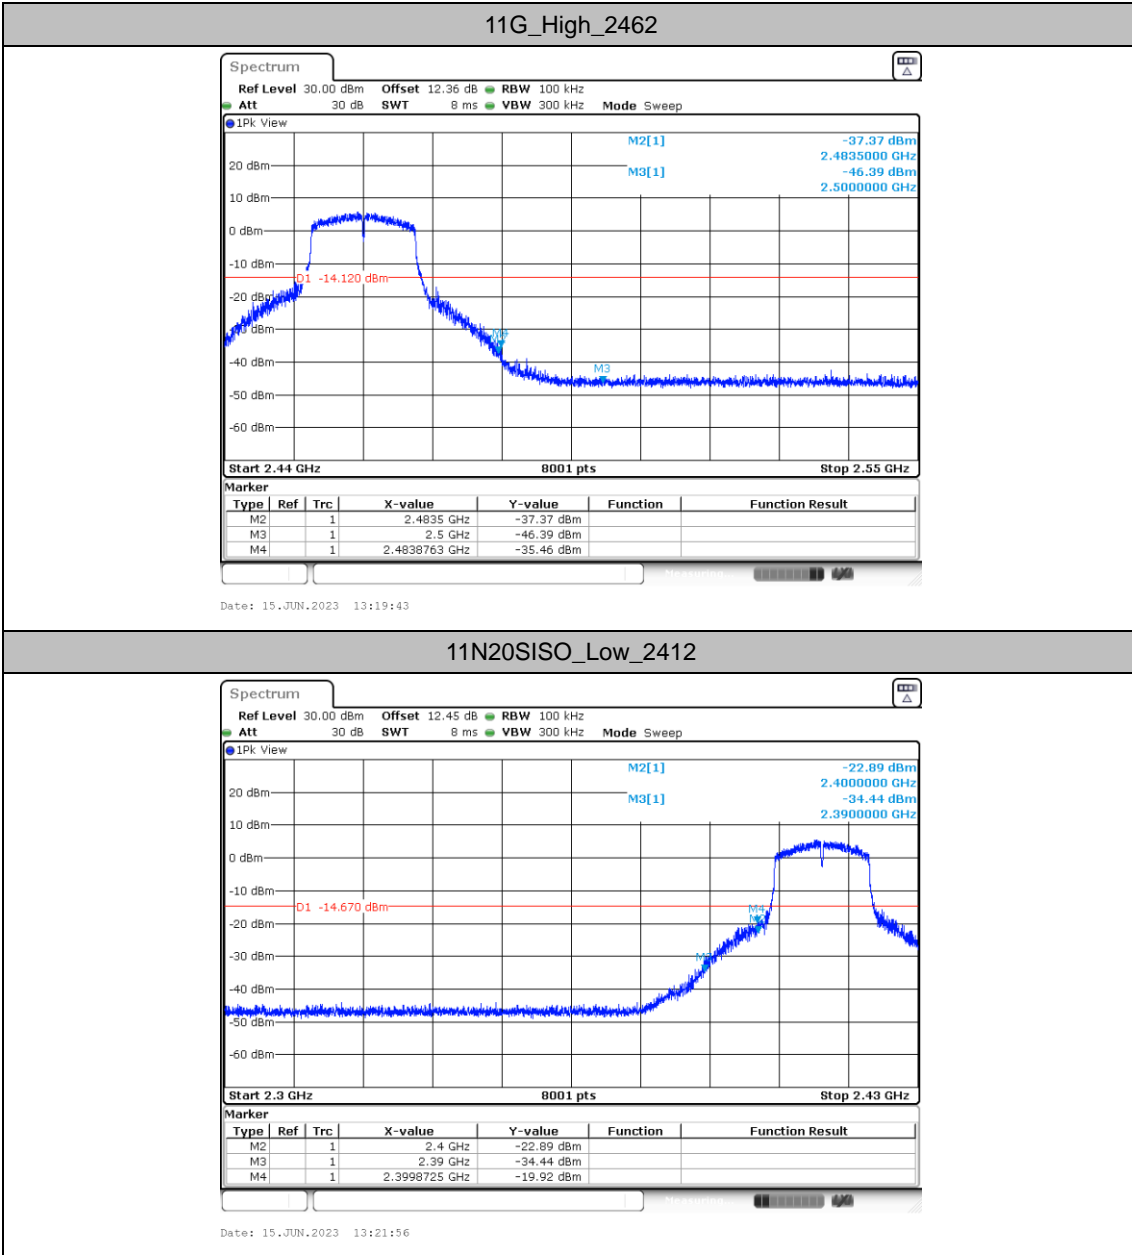

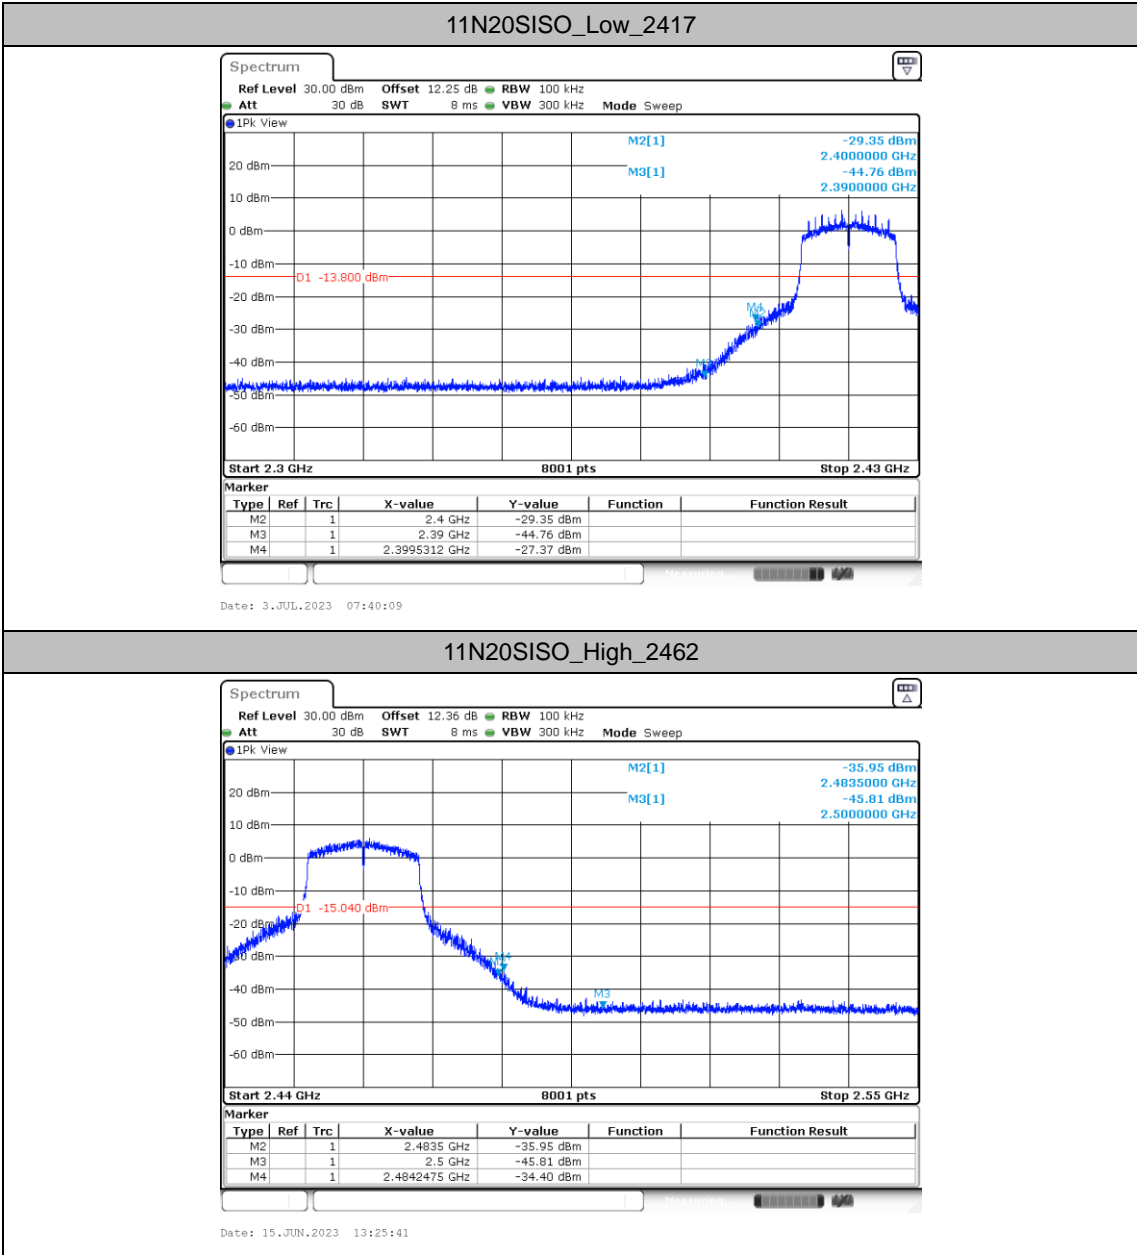
11N20SISO_High_2462


Conducted Spurious Emission

Test Result

TestMode	Freq(MHz)	FreqRange [Mhz]	RefLevel [dBm/100KHz]	Result [dBm/100KHz]	Limit [dBm/100KHz]	Verdict	
11B	2412	30~1000	10.51	-54.5	≤-9.49	PASS	
		1000~26500	10.51	-45.63	≤-9.49	PASS	
	2437	30~1000	11.00	-55.07	≤-9	PASS	
		1000~26500	11.00	-45.95	≤-9	PASS	
	2462	30~1000	11.19	-54.25	≤-8.81	PASS	
		1000~26500	11.19	-46.51	≤-8.81	PASS	
11G	2412	30~1000	6.59	-54.45	≤-13.41	PASS	
		1000~26500	6.59	-45.96	≤-13.41	PASS	
	2417	30~1000	7.10	-50.9	≤-12.9	PASS	
		1000~26500	7.10	-46.33	≤-12.9	PASS	
	2437	30~1000	6.06	-54.95	≤-13.94	PASS	
		1000~26500	6.06	-46.31	≤-13.94	PASS	
	2462	30~1000	5.88	-52.44	≤-14.12	PASS	
		1000~26500	5.88	-45.83	≤-14.12	PASS	
	11N20SISO	2412	30~1000	5.33	-54.44	≤-14.67	PASS
			1000~26500	5.33	-45.05	≤-14.67	PASS
2417		30~1000	6.20	-55.09	≤-13.8	PASS	
		1000~26500	6.20	-46.08	≤-13.8	PASS	
2437		30~1000	5.24	-54.62	≤-14.76	PASS	
		1000~26500	5.24	-46.07	≤-14.76	PASS	
2462		30~1000	4.96	-54.09	≤-15.04	PASS	
		1000~26500	4.96	-44.77	≤-15.04	PASS	




Test Graphs

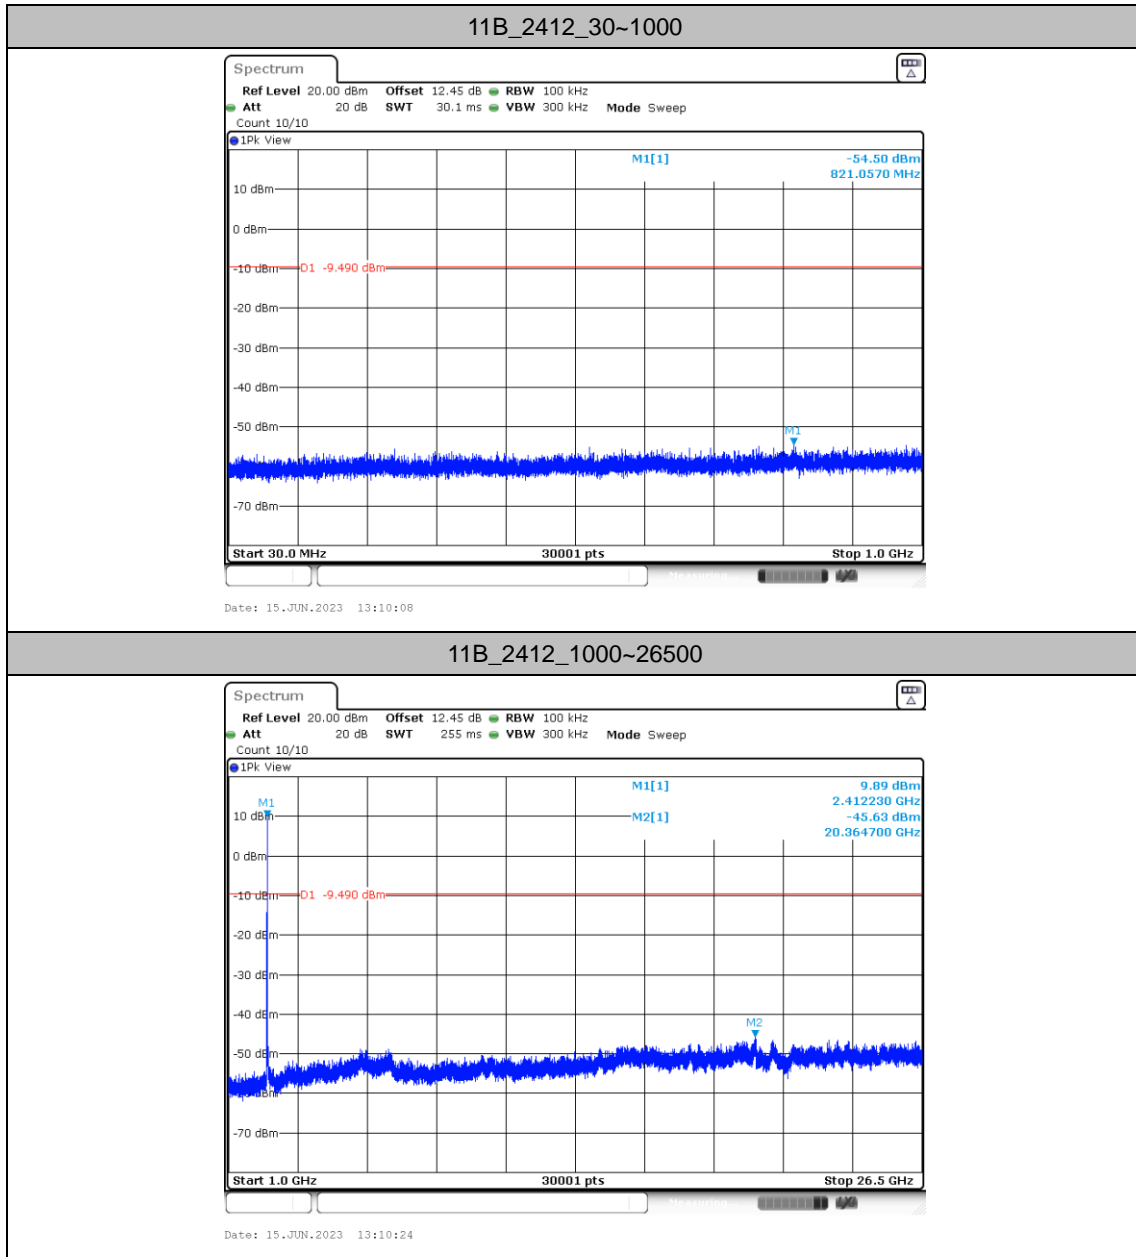




11B_2437_30~1000

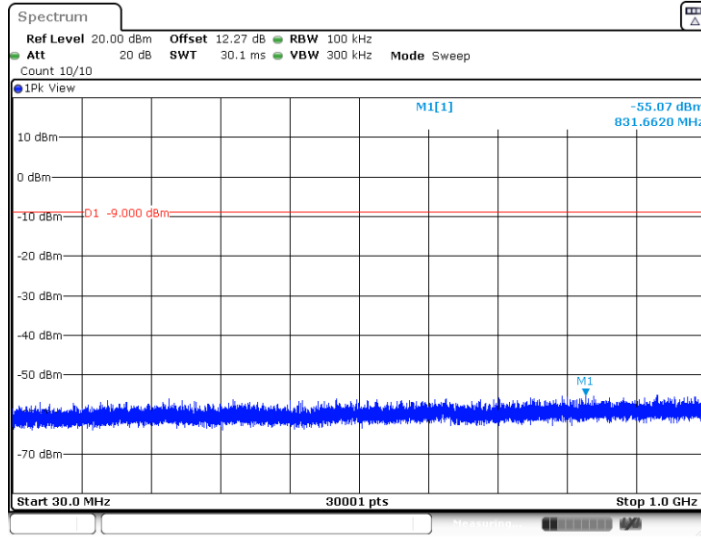

Date: 15 JUN. 2023 13:11:44


11B_2437_1000~26500

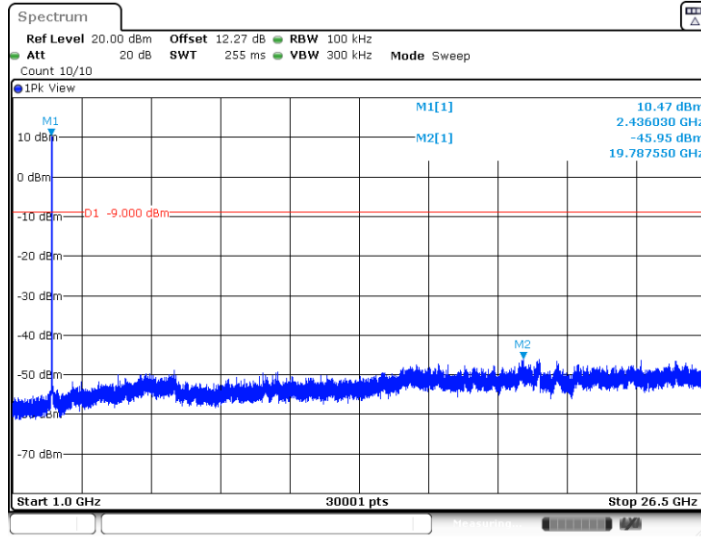

Date: 15 JUN. 2023 13:11:59




11B_2462_30~1000

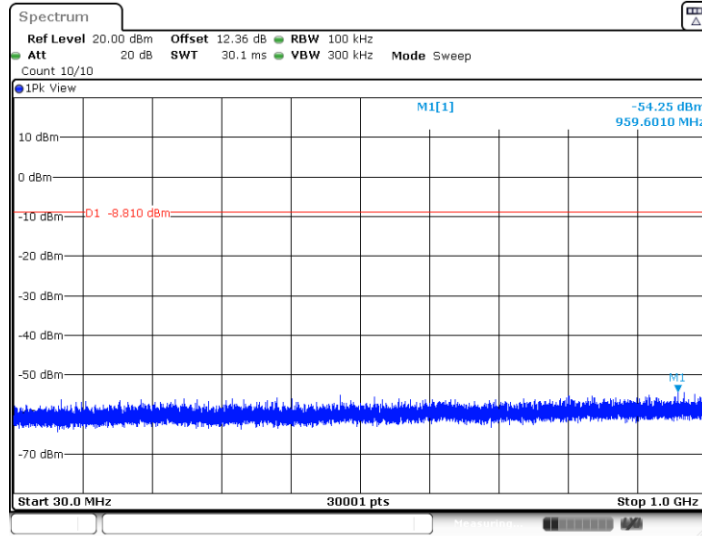



Date: 15 JUN. 2023 13:13:50


11B_2462_1000~26500

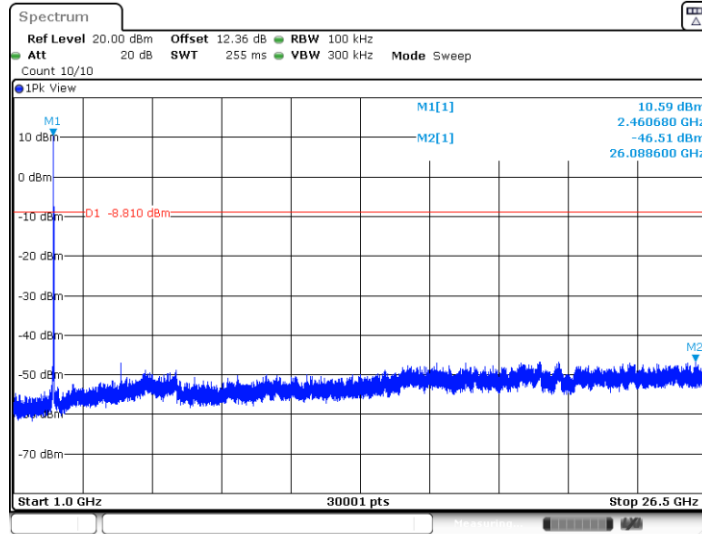



Date: 15 JUN. 2023 13:14:05

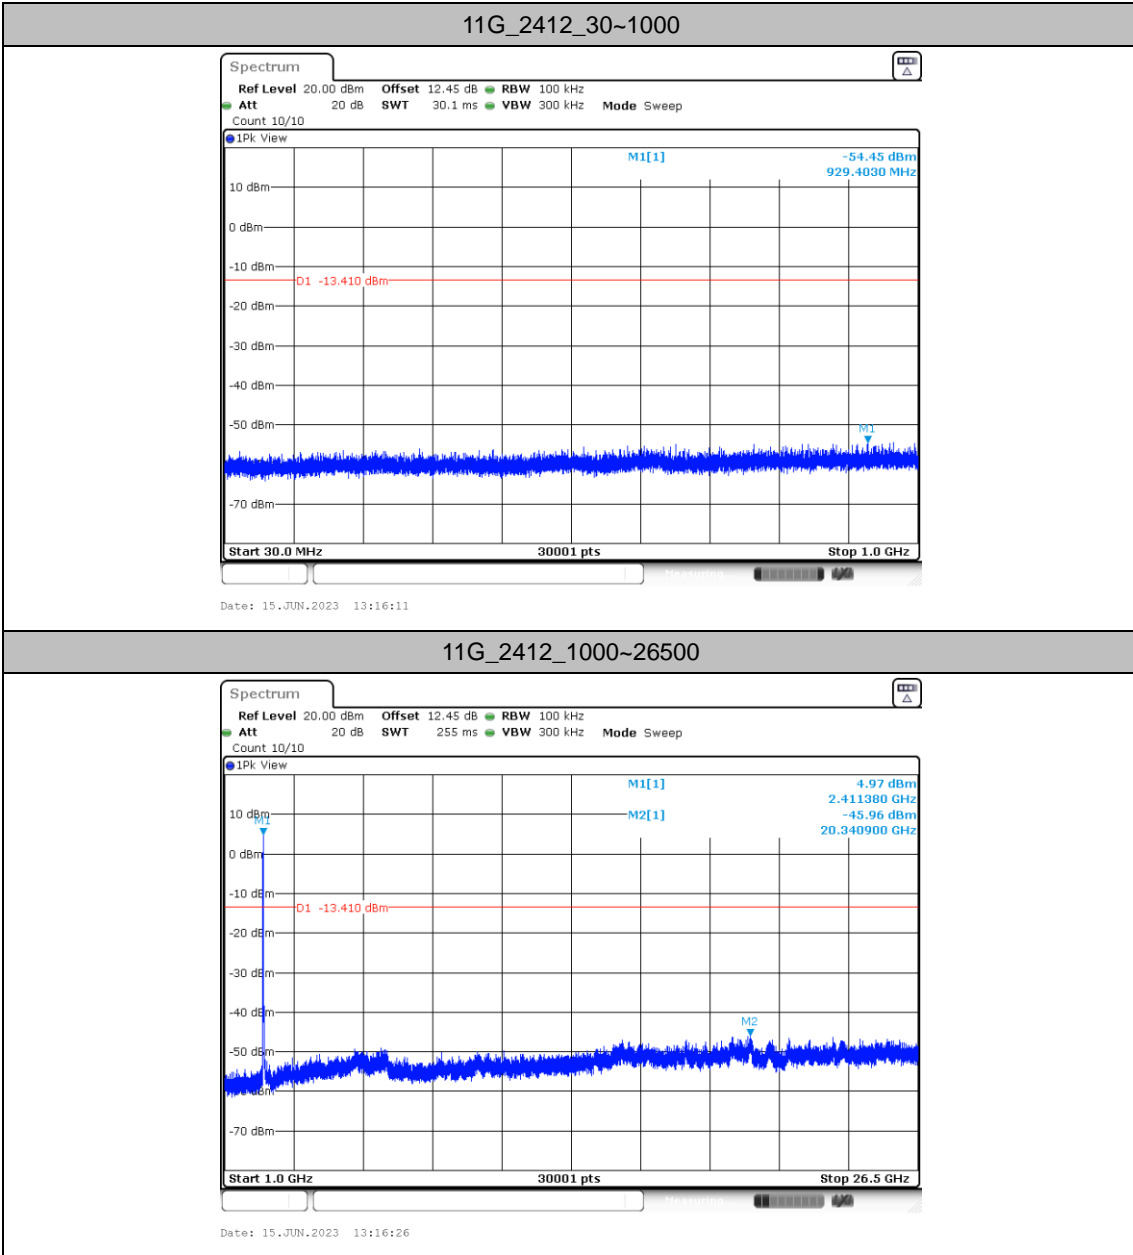

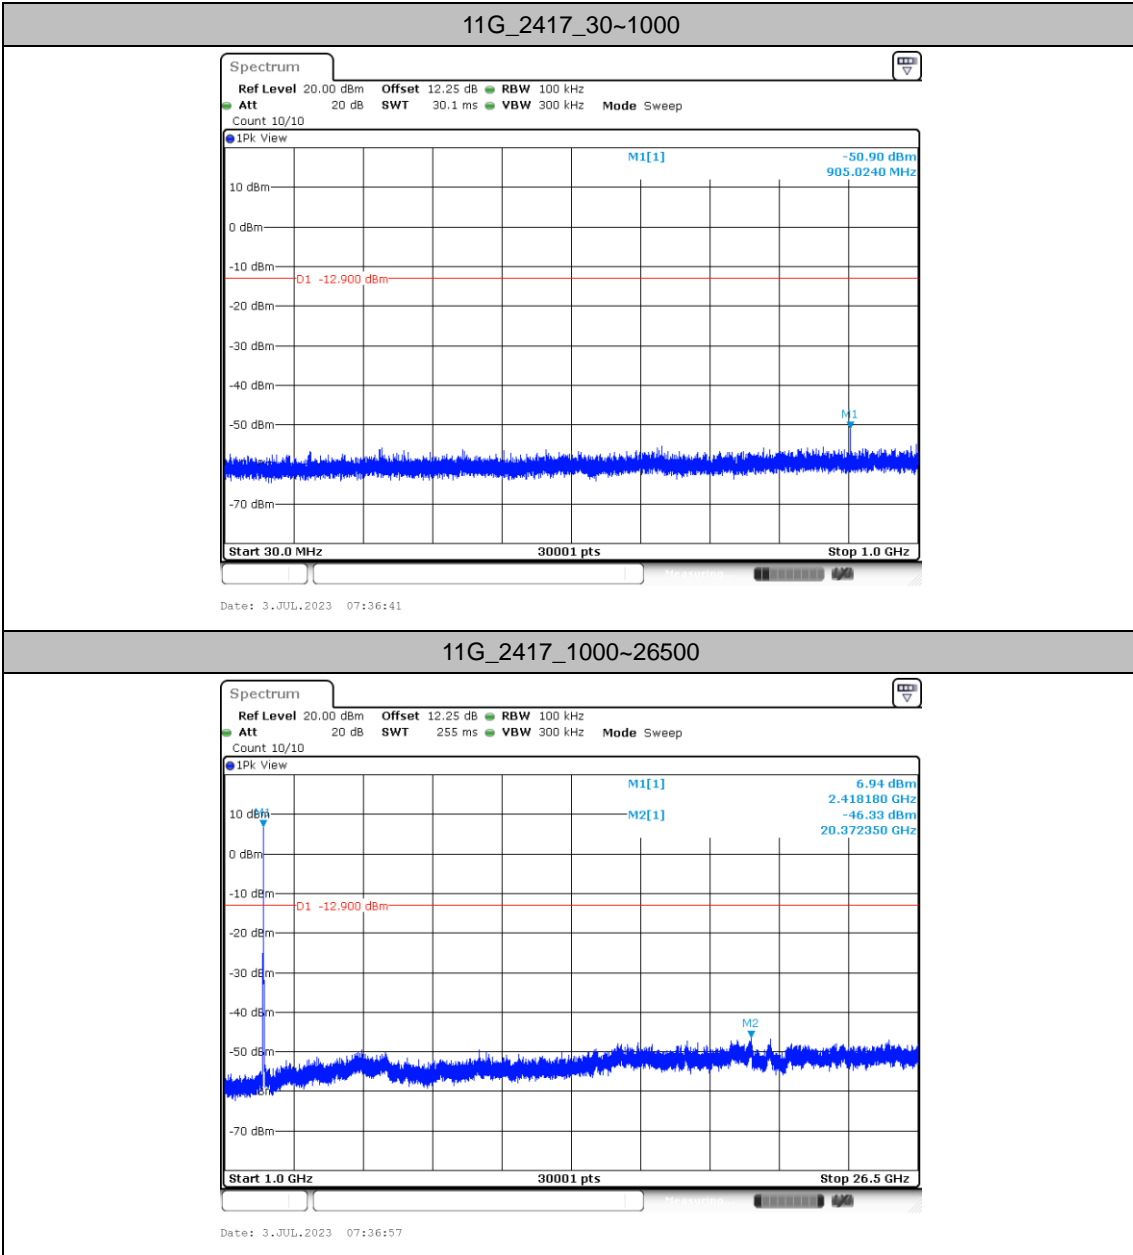

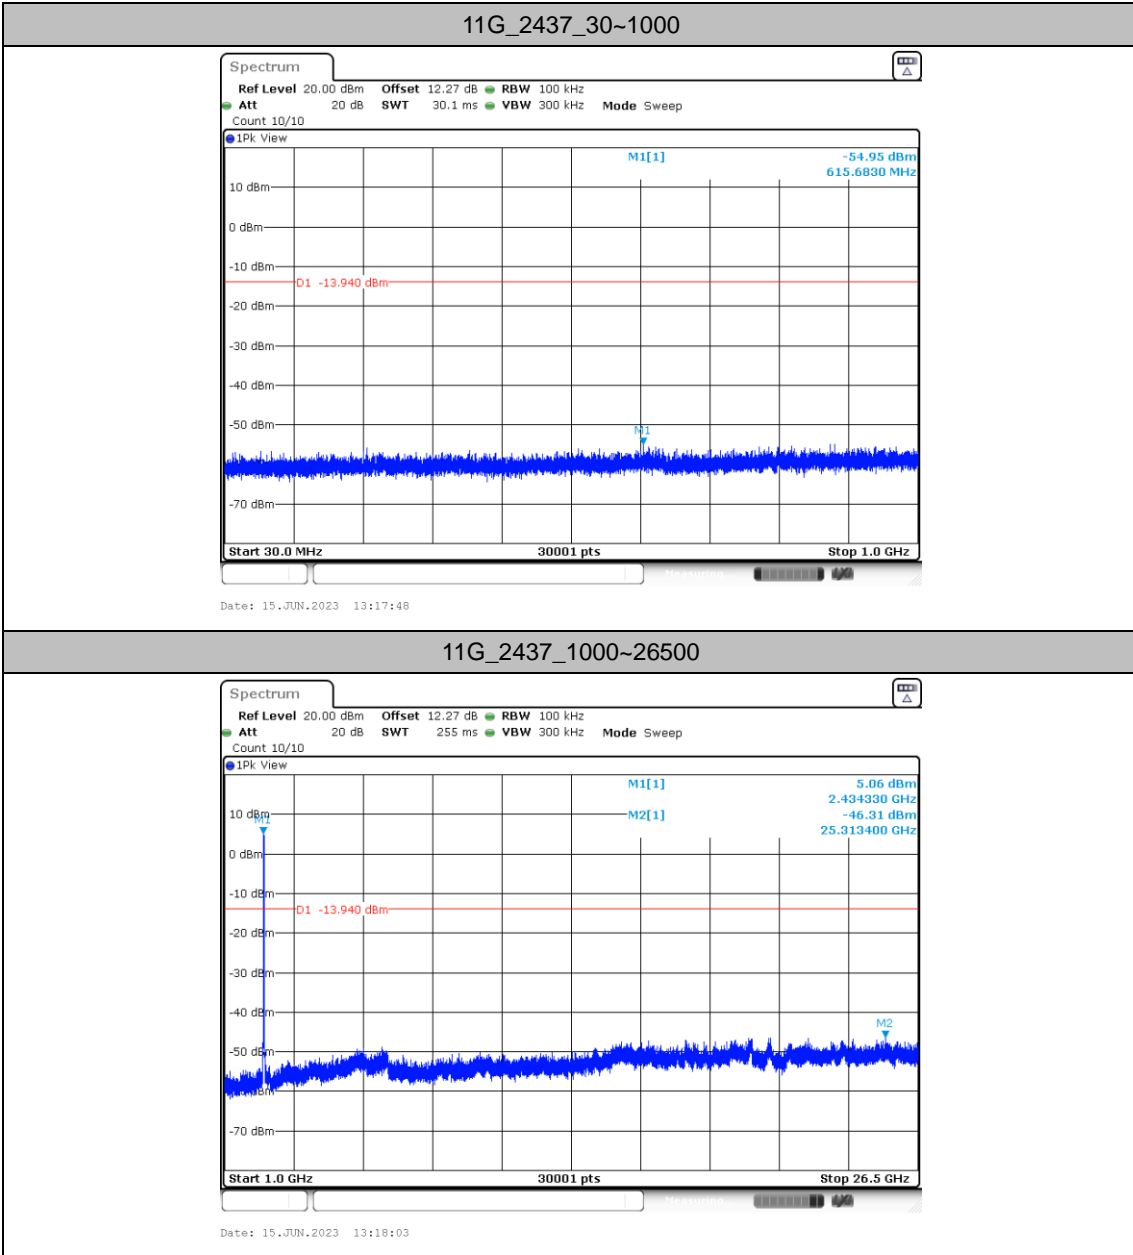


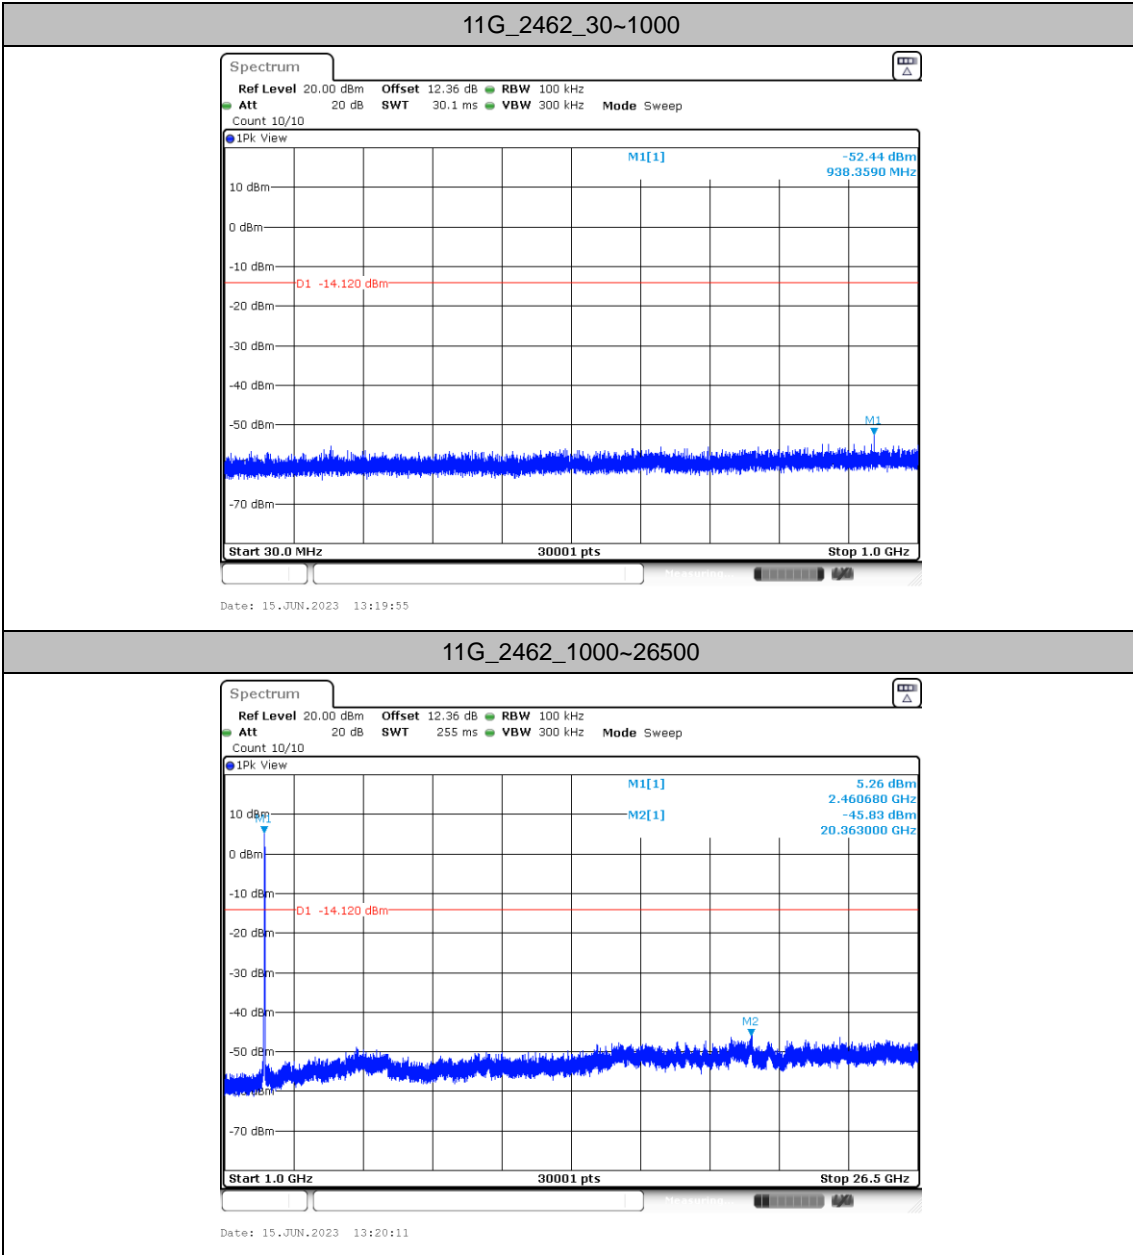

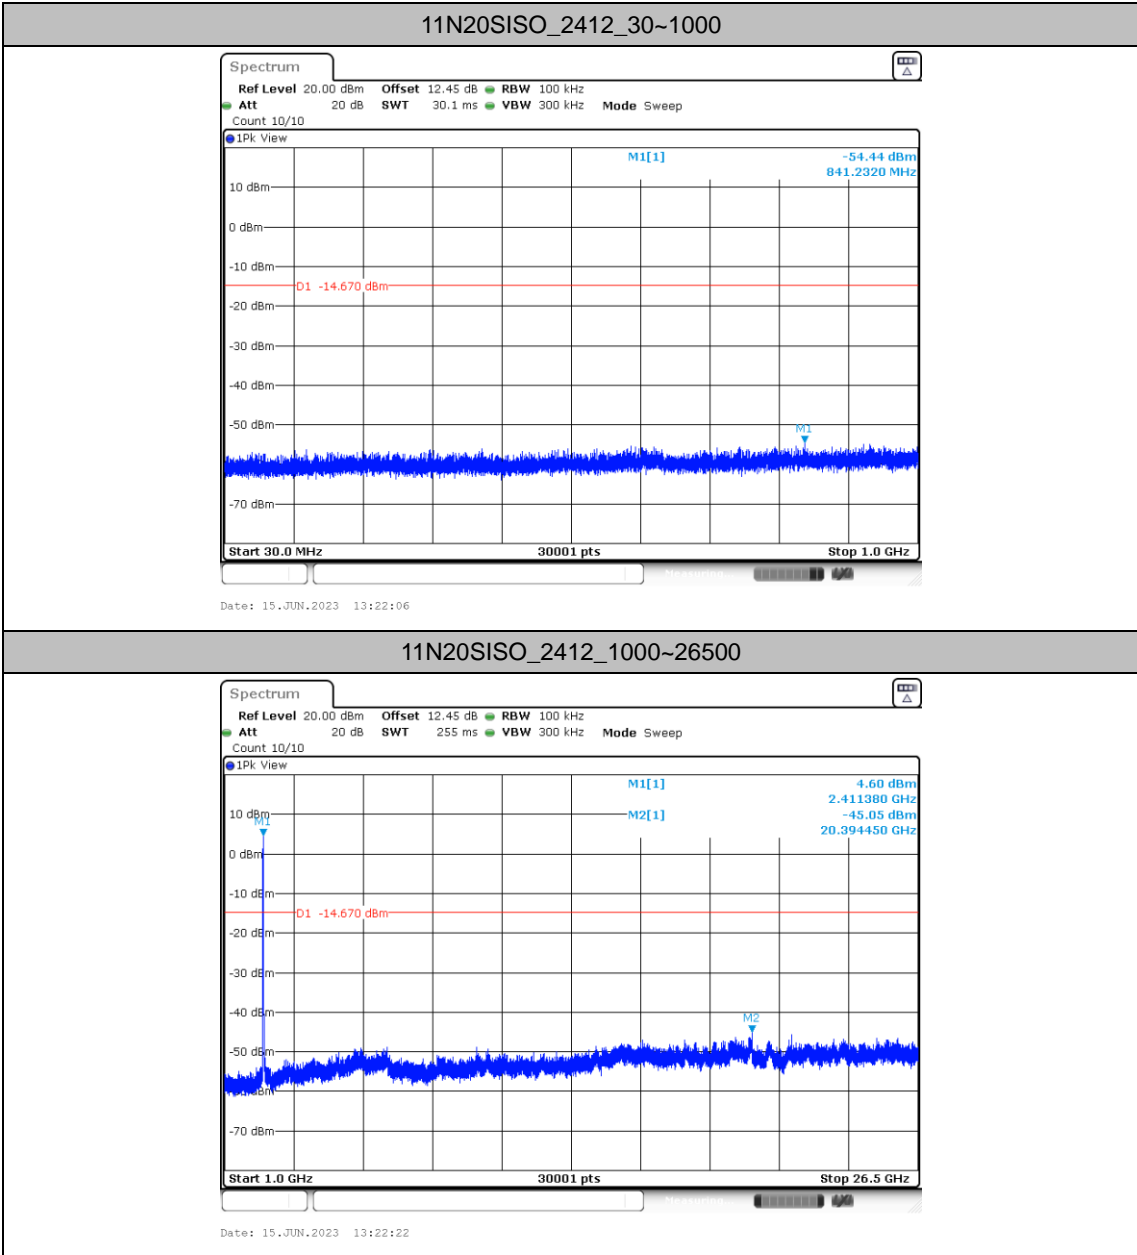




11N20SISO_2417_30~1000

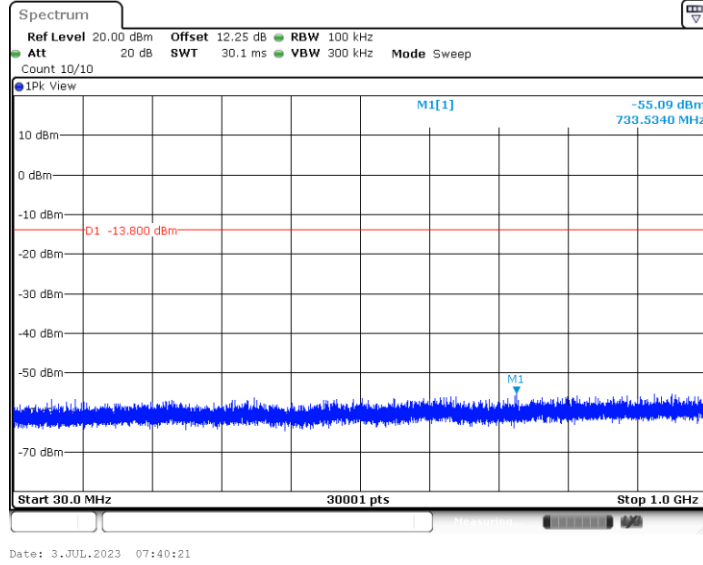


11N20SISO_2417_1000~26500

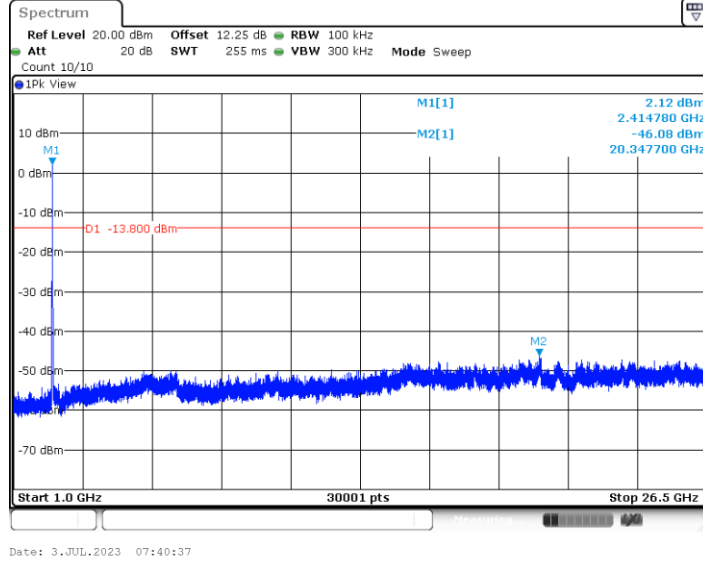





11N20SISO_2437_30~1000

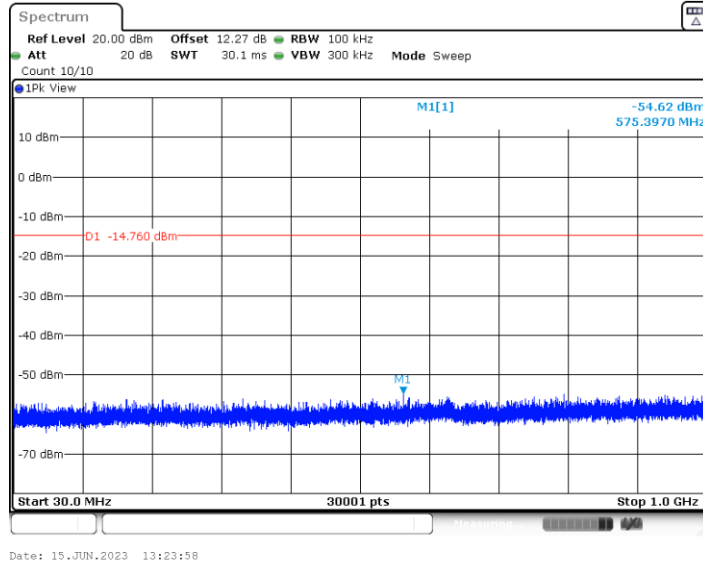

11N20SISO_2437_1000~26500

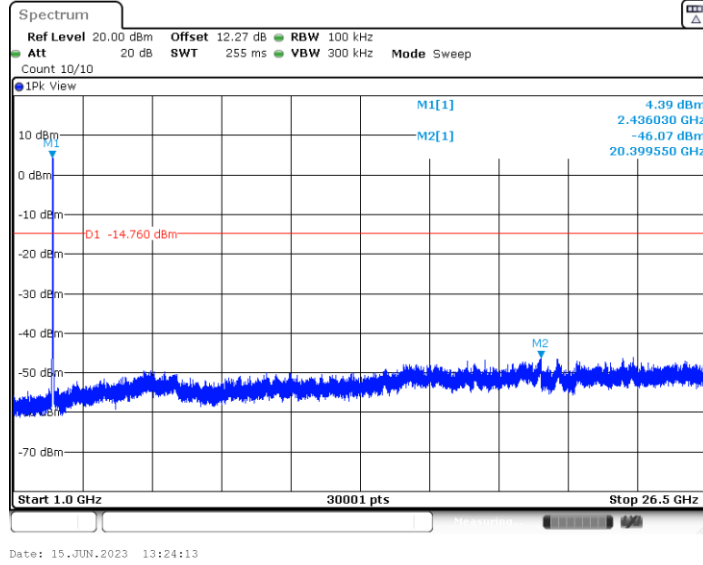


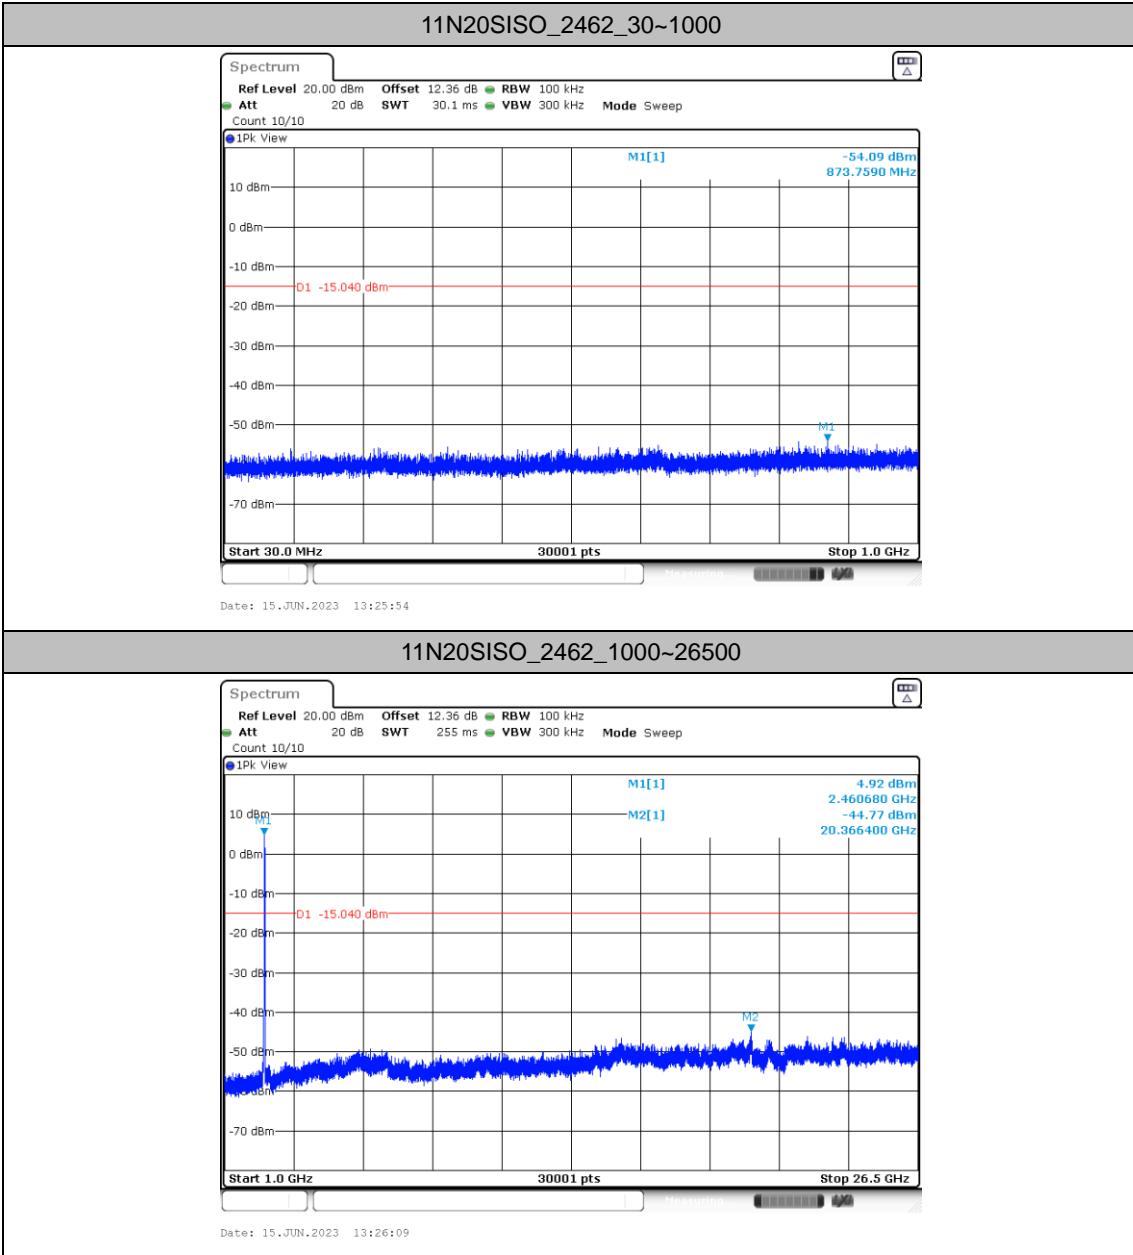



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

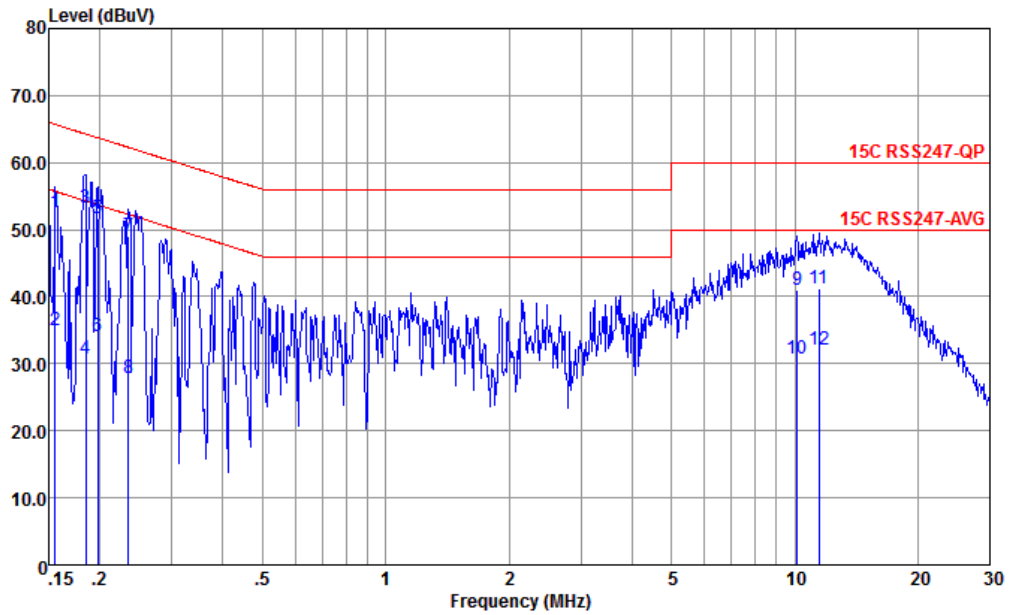


Site : CO01-KS
 Condition : 15C RSS247-QP LISN-060105-L 2023 LINE
 Project : (FR) 352916
 mode : Mode 1
 IMEI : 352326290031734/352326290031742 #2

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.156	52.68	-13.01	65.69	42.20	0.05	10.43	QP
2	0.156	35.08	-20.61	55.69	24.60	0.05	10.43	Average
3 *	0.184	53.26	-11.02	64.28	42.80	0.04	10.42	QP
4	0.184	30.66	-23.62	54.28	20.20	0.04	10.42	Average
5	0.198	51.65	-12.06	63.71	41.20	0.03	10.42	QP
6	0.198	34.05	-19.66	53.71	23.60	0.03	10.42	Average
7	0.235	49.03	-13.23	62.26	38.61	0.03	10.39	QP
8	0.235	27.93	-24.33	52.26	17.51	0.03	10.39	Average
9	10.125	41.01	-18.99	60.00	30.51	-0.16	10.66	QP
10	10.125	30.81	-19.19	50.00	20.31	-0.16	10.66	Average
11	11.438	41.25	-18.75	60.00	30.51	-0.15	10.89	QP
12	11.438	32.05	-17.95	50.00	21.31	-0.15	10.89	Average



Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

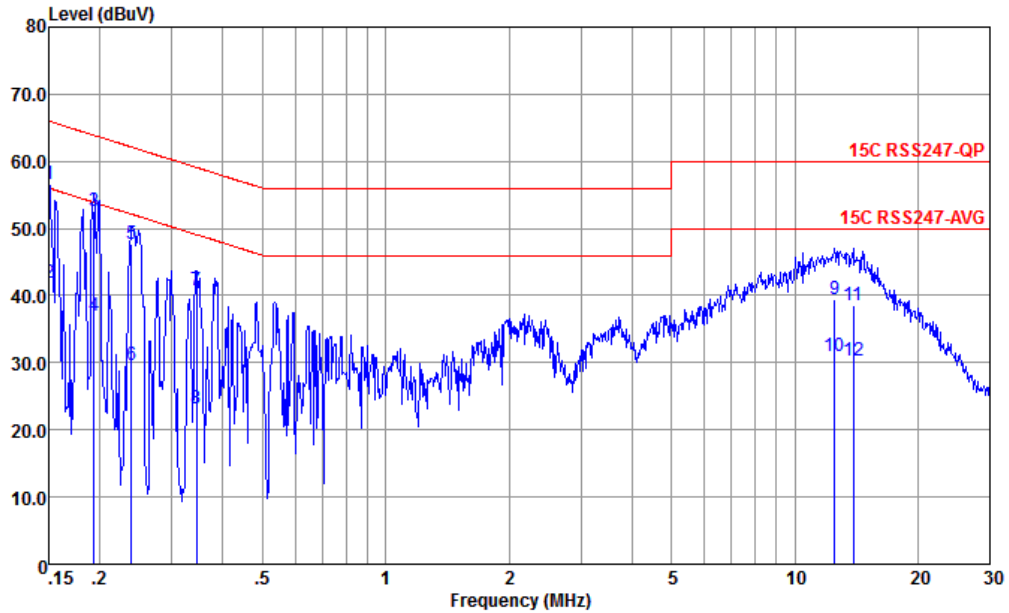

Site : CO01-KS
 Condition : 15C RSS247-QP LISN-060105-N 2023 NEUTRAL
 Project : (FR) 352916
 mode : Mode 1
 IMEI : 352326290031734/352326290031742 #2

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1 *	0.150	56.57	-9.43	66.00	46.10	0.04	10.43	QP
2	0.150	41.97	-14.03	56.00	31.50	0.04	10.43	Average
3	0.193	52.67	-11.22	63.89	42.20	0.05	10.42	QP
4	0.193	37.07	-16.82	53.89	26.60	0.05	10.42	Average
5	0.239	47.60	-14.53	62.13	37.20	0.01	10.39	QP
6	0.239	29.70	-22.43	52.13	19.30	0.01	10.39	Average
7	0.345	40.78	-18.31	59.09	30.50	-0.05	10.33	QP
8	0.345	23.18	-25.91	49.09	12.90	-0.05	10.33	Average
9	12.516	39.49	-20.51	60.00	28.61	-0.15	11.03	QP
10	12.516	31.09	-18.91	50.00	20.21	-0.15	11.03	Average
11	13.915	38.63	-21.37	60.00	27.60	-0.12	11.15	QP
12	13.915	30.23	-19.77	50.00	19.20	-0.12	11.15	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C Radiated Spurious Emission Test Data

Test Engineer :	Ryan Xu	Relative Humidity :	41~42%
		Temperature :	22~23°C

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Modulation	Channel	Frequency	Data Rate	Remark
Mode 1	2400-2483.5	802.11b	01	2412	1Mbps	-
Mode 2	2400-2483.5	802.11b	06	2437	1Mbps	-
Mode 3	2400-2483.5	802.11b	11	2462	1Mbps	-
Mode 4	2400-2483.5	802.11g	01	2412	6Mbps	-
Mode 5	2400-2483.5	802.11g	06	2437	6Mbps	-
Mode 6	2400-2483.5	802.11g	11	2462	6Mbps	-
Mode 7	2400-2483.5	802.11n HT20	01	2412	MCS0	-
Mode 8	2400-2483.5	802.11n HT20	06	2437	MCS0	-
Mode 9	2400-2483.5	802.11n HT20	11	2462	MCS0	-
Mode 10	2400-2483.5	802.11g	02	2417	6Mbps	
Mode 11	2400-2483.5	802.11n HT20	02	2417	MCS0	
-	2400-2483.5	802.11g	01	2412	6Mbps	LF

<Co-location>

Mode	Band (MHz)	Modulation	Channel	Frequency	Data Rate	Remark
Mode 12	2400-2483.5	802.11g	01	2412	6Mbps	-
	WWAN LTE CA_5A-7A Link					



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11b	01	2385.27	42.66	54.00	-11.34	H	AVERAGE	Pass	Band Edge
1	802.11b	01	4824.00	50.20	54.00	-3.80	V	AVERAGE	Pass	Harmonic
2	802.11b	06	-	-	-	-	-	-	-	Band Edge
2	802.11b	06	4874.00	50.44	54.00	-3.56	V	AVERAGE	Pass	Harmonic
3	802.11b	11	2486.70	44.21	54.00	-9.79	H	AVERAGE	Pass	Band Edge
3	802.11b	11	4924.00	50.78	54.00	-3.22	V	AVERAGE	Pass	Harmonic
4	802.11g	01	2389.95	50.92	54.00	-3.08	H	AVERAGE	Pass	Band Edge
4	802.11g	01	4824.00	43.14	74.00	-30.86	V	PEAK	Pass	Harmonic
5	802.11g	06	-	-	-	-	-	-	-	Band Edge
5	802.11g	06	7311.00	45.54	54.00	-8.46	V	AVERAGE	Pass	Harmonic
6	802.11g	11	2483.51	50.15	54.00	-3.85	H	AVERAGE	Pass	Band Edge
6	802.11g	11	7386.00	41.51	54.00	-12.49	H	AVERAGE	Pass	Harmonic
7	802.11n HT20	01	2389.95	50.22	54.00	-3.78	H	AVERAGE	Pass	Band Edge
7	802.11n HT20	01	4824.00	42.89	74.00	-31.11	V	PEAK	Pass	Harmonic
8	802.11n HT20	06	-	-	-	-	-	-	-	Band Edge
8	802.11n HT20	06	7311.00	45.18	54.00	-8.82	H	AVERAGE	Pass	Harmonic
9	802.11n HT20	11	2483.51	49.65	54.00	-4.35	H	AVERAGE	Pass	Band Edge
9	802.11n HT20	11	7386.00	38.75	54.00	-15.25	H	AVERAGE	Pass	Harmonic
10	802.11g	02	2389.95	50.27	54.00	-3.73	H	AVERAGE	Pass	Band Edge
10	802.11g	02	9251.00	45.92	74.00	-28.08	V	PEAK	Pass	Harmonic
11	802.11n HT20	02	2389.95	50.03	54.00	-3.97	H	AVERAGE	Pass	Band Edge
11	802.11n HT20	02	7251.00	44.82	74.00	-29.18	H	PEAK	Pass	Harmonic
-	802.11g	01	39.70	29.29	40	-10.71	V	PEAK	Pass	LF







<Co-location>

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
12	802.11g	01	2389.95	48.16	54.00	-5.84	H	AVERAGE	Pass	Band Edge
12	802.11g	01	4824.00	43.17	74.00	-30.83	H	PEAK	Pass	Harmonic



		1																																																																																								
Mode	Band Edge																																																																																									
	2400-2483.5_802.11b_CH01_2412MHz																																																																																									
Pol.	Horizontal		Fundamental																																																																																							
Peak																																																																																										
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2378.77</td> <td>54.46</td> <td>74.00</td> <td>-19.54</td> <td>42.85</td> <td>31.90</td> <td>6.59</td> <td>32.88</td> <td>6.00</td> <td>138</td> <td>73 PEAK</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2378.77	54.46	74.00	-19.54	42.85	31.90	6.59	32.88	6.00	138	73 PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>106.71</td> <td>-----</td> <td>-----</td> <td>94.62</td> <td>32.27</td> <td>6.63</td> <td>32.81</td> <td>6.00</td> <td>138</td> <td>73 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2412.00	106.71	-----	-----	94.62	32.27	6.63	32.81	6.00	138
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2378.77	54.46	74.00	-19.54	42.85	31.90	6.59	32.88	6.00	138	73 PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2412.00	106.71	-----	-----	94.62	32.27	6.63	32.81	6.00	138	73 PEAK																																																																															
Avg																																																																																										
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2385.27</td> <td>42.66</td> <td>54.00</td> <td>-11.34</td> <td>30.94</td> <td>31.99</td> <td>6.60</td> <td>32.87</td> <td>6.00</td> <td>138</td> <td>73 AVERAGE</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2385.27	42.66	54.00	-11.34	30.94	31.99	6.60	32.87	6.00	138	73 AVERAGE	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>102.25</td> <td>-----</td> <td>-----</td> <td>90.16</td> <td>32.27</td> <td>6.63</td> <td>32.81</td> <td>6.00</td> <td>138</td> <td>73 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2412.00	102.25	-----	-----	90.16	32.27	6.63	32.81	6.00	138
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2385.27	42.66	54.00	-11.34	30.94	31.99	6.60	32.87	6.00	138	73 AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2412.00	102.25	-----	-----	90.16	32.27	6.63	32.81	6.00	138	73 AVERAGE																																																																															

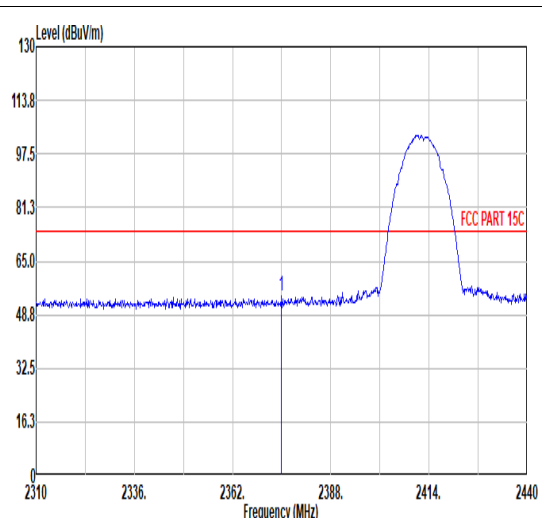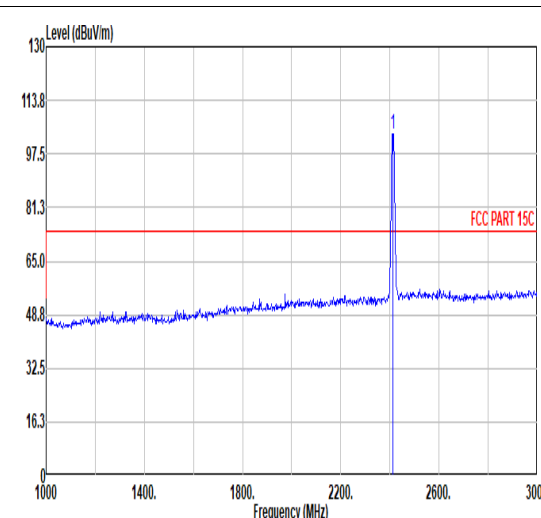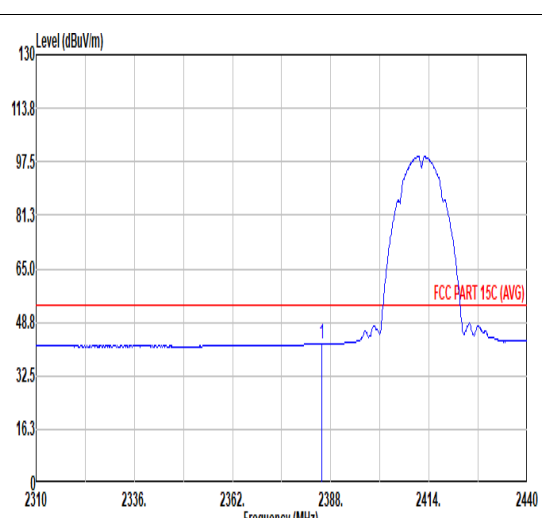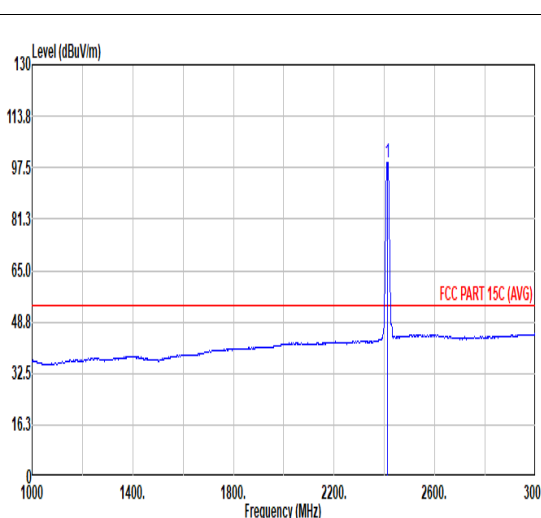

		1																																																																																		
Mode	Band Edge																																																																																			
	2400-2483.5_802.11b_CH01_2412MHz																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 2310 to 2440 MHz. A red horizontal line indicates the FCC PART 15C limit at approximately 74 dBuV/m. A blue curve shows the signal level, peaking at approximately 100 dBuV/m around 2412 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2375.00</td> <td>54.47</td> <td>74.00</td> <td>-19.53</td> <td>42.92</td> <td>31.85</td> <td>6.58</td> <td>32.88</td> <td>6.00</td> <td>393</td> <td>99</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2375.00	54.47	74.00	-19.53	42.92	31.85	6.58	32.88	6.00	393	99	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 1000 to 3000 MHz. A red horizontal line indicates the FCC PART 15C limit at approximately 74 dBuV/m. A blue curve shows the signal level, peaking at approximately 103 dBuV/m around 2412 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>103.71</td> <td>-----</td> <td>-----</td> <td>91.62</td> <td>32.27</td> <td>6.63</td> <td>32.81</td> <td>6.00</td> <td>393</td> <td>99</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	103.71	-----	-----	91.62	32.27	6.63	32.81	6.00	393	99	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2375.00	54.47	74.00	-19.53	42.92	31.85	6.58	32.88	6.00	393	99	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2412.00	103.71	-----	-----	91.62	32.27	6.63	32.81	6.00	393	99	PEAK																																																																								
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 2310 to 2440 MHz. A red horizontal line indicates the FCC PART 15C (AVG) limit at approximately 54 dBuV/m. A blue curve shows the average signal level, peaking at approximately 75 dBuV/m around 2412 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2385.66</td> <td>42.27</td> <td>54.00</td> <td>-11.73</td> <td>30.54</td> <td>32.00</td> <td>6.60</td> <td>32.87</td> <td>6.00</td> <td>393</td> <td>99</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2385.66	42.27	54.00	-11.73	30.54	32.00	6.60	32.87	6.00	393	99	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 1000 to 3000 MHz. A red horizontal line indicates the FCC PART 15C (AVG) limit at approximately 54 dBuV/m. A blue curve shows the average signal level, peaking at approximately 79 dBuV/m around 2412 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>99.26</td> <td>-----</td> <td>-----</td> <td>87.17</td> <td>32.27</td> <td>6.63</td> <td>32.81</td> <td>6.00</td> <td>393</td> <td>99</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	99.26	-----	-----	87.17	32.27	6.63	32.81	6.00	393	99	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2385.66	42.27	54.00	-11.73	30.54	32.00	6.60	32.87	6.00	393	99	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2412.00	99.26	-----	-----	87.17	32.27	6.63	32.81	6.00	393	99	AVERAGE																																																																								



Mode	1																																																																																													
	Harmonic																																																																																													
	2400-2483.5_802.11b_CH01_2412MHz																																																																																													
Pol.	Horizontal	Vertical																																																																																												
Peak Avg																																																																																														
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>43.17</td> <td>74.00</td> <td>-30.83</td> <td>60.41</td> <td>34.20</td> <td>9.47</td> <td>60.91</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	4824.00	43.17	74.00	-30.83	60.41	34.20	9.47	60.91	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>53.22</td> <td>74.00</td> <td>-20.78</td> <td>70.46</td> <td>34.20</td> <td>9.47</td> <td>60.91</td> <td>0.00</td> <td>289</td> <td>98</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>4824.00</td> <td>50.20</td> <td>54.00</td> <td>-3.80</td> <td>67.44</td> <td>34.20</td> <td>9.47</td> <td>60.91</td> <td>0.00</td> <td>289</td> <td>98</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	4824.00	53.22	74.00	-20.78	70.46	34.20	9.47	60.91	0.00	289	98	PEAK	2	4824.00	50.20	54.00	-3.80	67.44	34.20	9.47	60.91	0.00	289	98
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																						
1	4824.00	43.17	74.00	-30.83	60.41	34.20	9.47	60.91	0.00	---	---	PEAK																																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																						
1	4824.00	53.22	74.00	-20.78	70.46	34.20	9.47	60.91	0.00	289	98	PEAK																																																																																		
2	4824.00	50.20	54.00	-3.80	67.44	34.20	9.47	60.91	0.00	289	98	AVERAGE																																																																																		



Mode	2																																																																																																																																																	
	Harmonic																																																																																																																																																	
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																
Peak Avg																																																																																																																																																		
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>43.35</td> <td>74.00</td> <td>-30.65</td> <td>60.50</td> <td>34.20</td> <td>9.52</td> <td>60.87</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>50.20</td> <td>74.00</td> <td>-23.80</td> <td>63.20</td> <td>35.64</td> <td>11.69</td> <td>60.33</td> <td>0.00</td> <td>108</td> <td>319</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>7311.00</td> <td>44.38</td> <td>54.00</td> <td>-9.62</td> <td>57.37</td> <td>35.64</td> <td>11.69</td> <td>60.32</td> <td>0.00</td> <td>108</td> <td>319</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	4874.00	43.35	74.00	-30.65	60.50	34.20	9.52	60.87	0.00	---	---	PEAK	2	7311.00	50.20	74.00	-23.80	63.20	35.64	11.69	60.33	0.00	108	319	PEAK	3	7311.00	44.38	54.00	-9.62	57.37	35.64	11.69	60.32	0.00	108	319	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>53.40</td> <td>74.00</td> <td>-20.60</td> <td>70.55</td> <td>34.20</td> <td>9.52</td> <td>60.87</td> <td>0.00</td> <td>318</td> <td>98</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>4874.00</td> <td>50.44</td> <td>54.00</td> <td>-3.56</td> <td>67.59</td> <td>34.20</td> <td>9.52</td> <td>60.87</td> <td>0.00</td> <td>318</td> <td>98</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>7311.00</td> <td>50.82</td> <td>74.00</td> <td>-23.18</td> <td>63.82</td> <td>35.64</td> <td>11.69</td> <td>60.33</td> <td>0.00</td> <td>256</td> <td>101</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>7311.00</td> <td>45.11</td> <td>54.00</td> <td>-8.89</td> <td>58.10</td> <td>35.65</td> <td>11.69</td> <td>60.33</td> <td>0.00</td> <td>256</td> <td>101</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	4874.00	53.40	74.00	-20.60	70.55	34.20	9.52	60.87	0.00	318	98	PEAK	2	4874.00	50.44	54.00	-3.56	67.59	34.20	9.52	60.87	0.00	318	98	AVERAGE	3	7311.00	50.82	74.00	-23.18	63.82	35.64	11.69	60.33	0.00	256	101	PEAK	4	7311.00	45.11	54.00	-8.89	58.10	35.65	11.69	60.33	0.00	256	101
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																										
1	4874.00	43.35	74.00	-30.65	60.50	34.20	9.52	60.87	0.00	---	---	PEAK																																																																																																																																						
2	7311.00	50.20	74.00	-23.80	63.20	35.64	11.69	60.33	0.00	108	319	PEAK																																																																																																																																						
3	7311.00	44.38	54.00	-9.62	57.37	35.64	11.69	60.32	0.00	108	319	AVERAGE																																																																																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																										
1	4874.00	53.40	74.00	-20.60	70.55	34.20	9.52	60.87	0.00	318	98	PEAK																																																																																																																																						
2	4874.00	50.44	54.00	-3.56	67.59	34.20	9.52	60.87	0.00	318	98	AVERAGE																																																																																																																																						
3	7311.00	50.82	74.00	-23.18	63.82	35.64	11.69	60.33	0.00	256	101	PEAK																																																																																																																																						
4	7311.00	45.11	54.00	-8.89	58.10	35.65	11.69	60.33	0.00	256	101	AVERAGE																																																																																																																																						



		3																																																																																						
Mode	Band Edge																																																																																							
	2400-2483.5_802.11b_CH11_2462MHz																																																																																							
Pol.	Horizontal		Fundamental																																																																																					
Peak																																																																																								
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2486.28</td> <td>56.17</td> <td>74.00</td> <td>-17.83</td> <td>43.26</td> <td>32.79</td> <td>6.74</td> <td>32.62</td> <td>6.00</td> <td>100</td> <td>80 PEAK</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2486.28	56.17	74.00	-17.83	43.26	32.79	6.74	32.62	6.00	100	80 PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>105.97</td> <td>-----</td> <td>-----</td> <td>93.33</td> <td>32.61</td> <td>6.71</td> <td>32.68</td> <td>6.00</td> <td>100</td> <td>80 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	105.97	-----	-----	93.33	32.61	6.71	32.68	6.00	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	2486.28	56.17	74.00	-17.83	43.26	32.79	6.74	32.62	6.00	100	80 PEAK																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	2462.00	105.97	-----	-----	93.33	32.61	6.71	32.68	6.00	100	80 PEAK																																																																													
Avg																																																																																								
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2486.70</td> <td>44.21</td> <td>54.00</td> <td>-9.79</td> <td>31.30</td> <td>32.79</td> <td>6.74</td> <td>32.62</td> <td>6.00</td> <td>100</td> <td>80 AVERAGE</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2486.70	44.21	54.00	-9.79	31.30	32.79	6.74	32.62	6.00	100	80 AVERAGE	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>101.61</td> <td>-----</td> <td>-----</td> <td>88.97</td> <td>32.61</td> <td>6.71</td> <td>32.68</td> <td>6.00</td> <td>100</td> <td>80 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	101.61	-----	-----	88.97	32.61	6.71	32.68	6.00	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	2486.70	44.21	54.00	-9.79	31.30	32.79	6.74	32.62	6.00	100	80 AVERAGE																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	2462.00	101.61	-----	-----	88.97	32.61	6.71	32.68	6.00	100	80 AVERAGE																																																																													



		3																																																																																		
Mode		Band Edge																																																																																		
		2400-2483.5_802.11b_CH11_2462MHz																																																																																		
Pol.	Vertical	Fundamental																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Level</th> <th>Loss</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2495.67</td> <td>56.66</td> <td>74.00</td> <td>-17.34</td> <td>43.63</td> <td>32.87</td> <td>6.75</td> <td>32.59</td> <td>6.00</td> <td>372</td> <td>104</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Level	Loss	Loss	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2495.67	56.66	74.00	-17.34	43.63	32.87	6.75	32.59	6.00	372	104	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Level</th> <th>Loss</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>102.64</td> <td>-----</td> <td>-----</td> <td>90.00</td> <td>32.61</td> <td>6.71</td> <td>32.68</td> <td>6.00</td> <td>372</td> <td>104</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Level	Loss	Loss	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	102.64	-----	-----	90.00	32.61	6.71	32.68	6.00	372	104	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Level	Loss	Loss	Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2495.67	56.66	74.00	-17.34	43.63	32.87	6.75	32.59	6.00	372	104	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Level	Loss	Loss	Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2462.00	102.64	-----	-----	90.00	32.61	6.71	32.68	6.00	372	104	PEAK																																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Level</th> <th>Loss</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>98.30</td> <td>54.00</td> <td>44.30</td> <td>85.68</td> <td>32.60</td> <td>6.70</td> <td>32.68</td> <td>6.00</td> <td>372</td> <td>104</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Level	Loss	Loss	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	98.30	54.00	44.30	85.68	32.60	6.70	32.68	6.00	372	104	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Level</th> <th>Loss</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>98.30</td> <td>-----</td> <td>-----</td> <td>85.68</td> <td>32.60</td> <td>6.70</td> <td>32.68</td> <td>6.00</td> <td>372</td> <td>104</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Level	Loss	Loss	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	98.30	-----	-----	85.68	32.60	6.70	32.68	6.00	372	104	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Level	Loss	Loss	Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2462.00	98.30	54.00	44.30	85.68	32.60	6.70	32.68	6.00	372	104	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Level	Loss	Loss	Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2462.00	98.30	-----	-----	85.68	32.60	6.70	32.68	6.00	372	104	AVERAGE																																																																								







Mode	3																																																																																																																																				
	Harmonic																																																																																																																																				
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																																																				
Pol.	Horizontal	Vertical																																																																																																																																			
Peak Avg																																																																																																																																					
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.00</td> <td>48.65</td> <td>74.00</td> <td>-25.35</td> <td>65.71</td> <td>34.20</td> <td>9.57</td> <td>60.83</td> <td>0.00</td> <td>104</td> <td>85</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>4924.00</td> <td>44.23</td> <td>54.00</td> <td>-9.77</td> <td>61.29</td> <td>34.20</td> <td>9.57</td> <td>60.83</td> <td>0.00</td> <td>104</td> <td>85</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>7386.00</td> <td>46.71</td> <td>74.00</td> <td>-27.29</td> <td>59.75</td> <td>35.73</td> <td>11.72</td> <td>60.49</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	4924.00	48.65	74.00	-25.35	65.71	34.20	9.57	60.83	0.00	104	85	PEAK	2	4924.00	44.23	54.00	-9.77	61.29	34.20	9.57	60.83	0.00	104	85	AVERAGE	3	7386.00	46.71	74.00	-27.29	59.75	35.73	11.72	60.49	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.00</td> <td>53.42</td> <td>74.00</td> <td>-20.58</td> <td>70.48</td> <td>34.20</td> <td>9.57</td> <td>60.83</td> <td>0.00</td> <td>326</td> <td>99</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>4924.00</td> <td>50.78</td> <td>54.00</td> <td>-3.22</td> <td>67.84</td> <td>34.20</td> <td>9.57</td> <td>60.83</td> <td>0.00</td> <td>326</td> <td>99</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>7386.00</td> <td>46.68</td> <td>74.00</td> <td>-27.32</td> <td>59.72</td> <td>35.73</td> <td>11.72</td> <td>60.49</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	4924.00	53.42	74.00	-20.58	70.48	34.20	9.57	60.83	0.00	326	99	PEAK	2	4924.00	50.78	54.00	-3.22	67.84	34.20	9.57	60.83	0.00	326	99	AVERAGE	3	7386.00	46.68	74.00	-27.32	59.72	35.73	11.72	60.49	0.00	---	---
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																													
1	4924.00	48.65	74.00	-25.35	65.71	34.20	9.57	60.83	0.00	104	85	PEAK																																																																																																																									
2	4924.00	44.23	54.00	-9.77	61.29	34.20	9.57	60.83	0.00	104	85	AVERAGE																																																																																																																									
3	7386.00	46.71	74.00	-27.29	59.75	35.73	11.72	60.49	0.00	---	---	PEAK																																																																																																																									
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																													
1	4924.00	53.42	74.00	-20.58	70.48	34.20	9.57	60.83	0.00	326	99	PEAK																																																																																																																									
2	4924.00	50.78	54.00	-3.22	67.84	34.20	9.57	60.83	0.00	326	99	AVERAGE																																																																																																																									
3	7386.00	46.68	74.00	-27.32	59.72	35.73	11.72	60.49	0.00	---	---	PEAK																																																																																																																									



		4																																																																												
Mode		Band Edge																																																																												
		2400-2483.5_802.11g_CH01_2412MHz																																																																												
Pol.		Horizontal					Fundamental																																																																							
Peak																																																																														
		<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2387.61</td> <td>68.60</td> <td>74.00</td> <td>-5.40</td> <td>56.83</td> <td>32.03</td> <td>6.60</td> <td>32.86</td> <td>6.00</td> <td>116</td> <td>73 PEAK</td> </tr> </tbody> </table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg	1	2387.61	68.60	74.00	-5.40	56.83	32.03	6.60	32.86	6.00	116	73 PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>108.68</td> <td>-----</td> <td>-----</td> <td>96.57</td> <td>32.28</td> <td>6.64</td> <td>32.81</td> <td>6.00</td> <td>116</td> <td>73 PEAK</td> </tr> </tbody> </table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg	1	2412.00	108.68	-----	-----	96.57	32.28	6.64	32.81	6.00	116
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																																				
1	2387.61	68.60	74.00	-5.40	56.83	32.03	6.60	32.86	6.00	116	73 PEAK																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																																				
1	2412.00	108.68	-----	-----	96.57	32.28	6.64	32.81	6.00	116	73 PEAK																																																																			
Avg																																																																														
		<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>58.92</td> <td>54.00</td> <td>-3.08</td> <td>39.12</td> <td>32.06</td> <td>6.60</td> <td>32.86</td> <td>6.00</td> <td>116</td> <td>73 AVERAGE</td> </tr> </tbody> </table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg	1	2389.95	58.92	54.00	-3.08	39.12	32.06	6.60	32.86	6.00	116	73 AVERAGE	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>99.62</td> <td>-----</td> <td>-----</td> <td>87.51</td> <td>32.28</td> <td>6.64</td> <td>32.81</td> <td>6.00</td> <td>116</td> <td>73 AVERAGE</td> </tr> </tbody> </table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg	1	2412.00	99.62	-----	-----	87.51	32.28	6.64	32.81	6.00	116
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																																				
1	2389.95	58.92	54.00	-3.08	39.12	32.06	6.60	32.86	6.00	116	73 AVERAGE																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																																				
1	2412.00	99.62	-----	-----	87.51	32.28	6.64	32.81	6.00	116	73 AVERAGE																																																																			

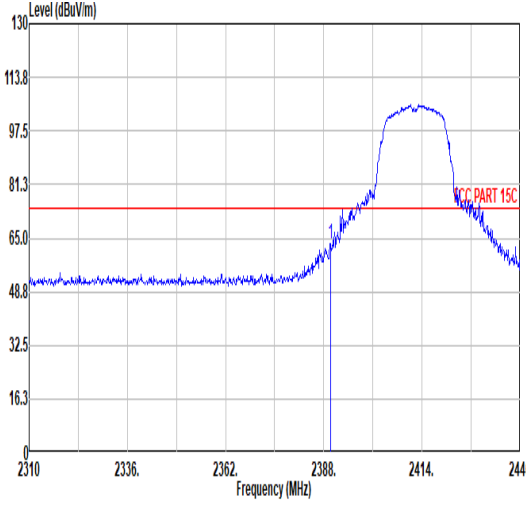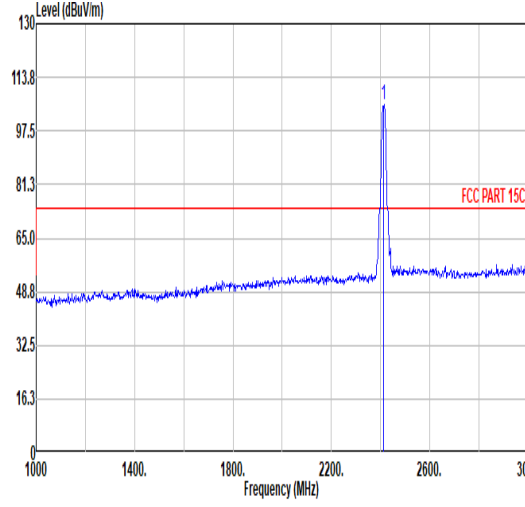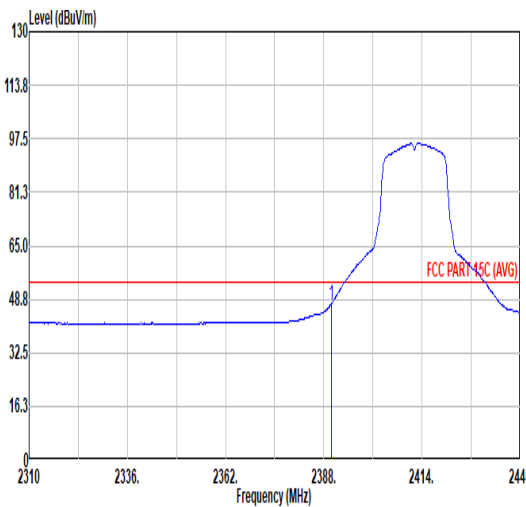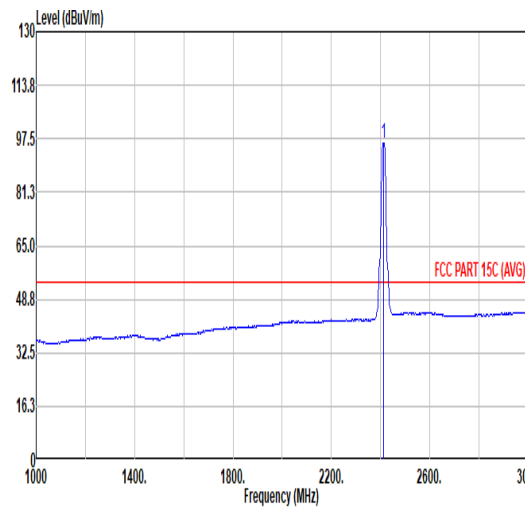

		4																																																																																		
Mode	Band Edge																																																																																			
	2400-2483.5_802.11g_CH01_2412MHz																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Level</th> <th>Loss</th> <th>Loss</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.82</td> <td>63.23</td> <td>74.00</td> <td>-10.77</td> <td>51.43</td> <td>32.06</td> <td>6.60</td> <td>32.86</td> <td>6.00</td> <td>394</td> <td>99</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Level	Loss	Loss	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.82	63.23	74.00	-10.77	51.43	32.06	6.60	32.86	6.00	394	99	PEAK	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Level</th> <th>Loss</th> <th>Loss</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>105.30</td> <td>-----</td> <td>-----</td> <td>93.19</td> <td>32.28</td> <td>6.64</td> <td>32.81</td> <td>6.00</td> <td>394</td> <td>99</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Level	Loss	Loss	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	105.30	-----	-----	93.19	32.28	6.64	32.81	6.00	394	99	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Level	Loss	Loss	Loss	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2389.82	63.23	74.00	-10.77	51.43	32.06	6.60	32.86	6.00	394	99	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Level	Loss	Loss	Loss	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2412.00	105.30	-----	-----	93.19	32.28	6.64	32.81	6.00	394	99	PEAK																																																																								
Avg	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Level</th> <th>Loss</th> <th>Loss</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>47.34</td> <td>54.00</td> <td>-6.66</td> <td>35.54</td> <td>32.06</td> <td>6.60</td> <td>32.86</td> <td>6.00</td> <td>394</td> <td>99</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Level	Loss	Loss	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	47.34	54.00	-6.66	35.54	32.06	6.60	32.86	6.00	394	99	AVERAGE	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Level</th> <th>Loss</th> <th>Loss</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>96.26</td> <td>-----</td> <td>-----</td> <td>84.15</td> <td>32.28</td> <td>6.64</td> <td>32.81</td> <td>6.00</td> <td>394</td> <td>99</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Level	Loss	Loss	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	96.26	-----	-----	84.15	32.28	6.64	32.81	6.00	394	99	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Level	Loss	Loss	Loss	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2389.95	47.34	54.00	-6.66	35.54	32.06	6.60	32.86	6.00	394	99	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Level	Loss	Loss	Loss	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2412.00	96.26	-----	-----	84.15	32.28	6.64	32.81	6.00	394	99	AVERAGE																																																																								



		4																																																																																									
Mode	Harmonic																																																																																										
	2400-2483.5_802.11g_CH01_2412MHz																																																																																										
Pol.	Horizontal		Vertical																																																																																								
Peak Avg																																																																																											
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>42.90</td> <td>74.00</td> <td>-31.10</td> <td>60.14</td> <td>34.20</td> <td>9.47</td> <td>60.91</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4824.00	42.90	74.00	-31.10	60.14	34.20	9.47	60.91	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>43.14</td> <td>74.00</td> <td>-30.86</td> <td>60.38</td> <td>34.20</td> <td>9.47</td> <td>60.91</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4824.00	43.14	74.00	-30.86	60.38	34.20	9.47	60.91	0.00	---	---
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																	
1	4824.00	42.90	74.00	-31.10	60.14	34.20	9.47	60.91	0.00	---	---	PEAK																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																	
1	4824.00	43.14	74.00	-30.86	60.38	34.20	9.47	60.91	0.00	---	---	PEAK																																																																															
Peak																																																																																											



Mode	5																																																																																																																																												
	Harmonic																																																																																																																																												
	2400-2483.5_802.11g_CH06_2437MHz																																																																																																																																												
Pol.	Horizontal	Vertical																																																																																																																																											
Peak Avg																																																																																																																																													
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>43.26</td> <td>74.00</td> <td>-30.74</td> <td>60.41</td> <td>34.20</td> <td>9.52</td> <td>60.87</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>56.40</td> <td>74.00</td> <td>-17.60</td> <td>69.40</td> <td>35.64</td> <td>11.69</td> <td>60.33</td> <td>0.00</td> <td>106</td> <td>319</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>7311.00</td> <td>45.17</td> <td>54.00</td> <td>-8.83</td> <td>58.16</td> <td>35.64</td> <td>11.69</td> <td>60.32</td> <td>0.00</td> <td>106</td> <td>319</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4874.00	43.26	74.00	-30.74	60.41	34.20	9.52	60.87	0.00	---	---	PEAK	2	7311.00	56.40	74.00	-17.60	69.40	35.64	11.69	60.33	0.00	106	319	PEAK	3	7311.00	45.17	54.00	-8.83	58.16	35.64	11.69	60.32	0.00	106	319	AVERAGE	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>42.71</td> <td>74.00</td> <td>-31.29</td> <td>59.06</td> <td>34.20</td> <td>9.52</td> <td>60.87</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>58.11</td> <td>74.00</td> <td>-15.89</td> <td>71.11</td> <td>35.64</td> <td>11.69</td> <td>60.33</td> <td>0.00</td> <td>265</td> <td>103</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>7311.00</td> <td>45.54</td> <td>54.00</td> <td>-8.46</td> <td>58.53</td> <td>35.64</td> <td>11.69</td> <td>60.32</td> <td>0.00</td> <td>265</td> <td>103</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4874.00	42.71	74.00	-31.29	59.06	34.20	9.52	60.87	0.00	---	---	PEAK	2	7311.00	58.11	74.00	-15.89	71.11	35.64	11.69	60.33	0.00	265	103	PEAK	3	7311.00	45.54	54.00	-8.46	58.53	35.64	11.69	60.32	0.00	265	103
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																			
1	4874.00	43.26	74.00	-30.74	60.41	34.20	9.52	60.87	0.00	---	---	PEAK																																																																																																																																	
2	7311.00	56.40	74.00	-17.60	69.40	35.64	11.69	60.33	0.00	106	319	PEAK																																																																																																																																	
3	7311.00	45.17	54.00	-8.83	58.16	35.64	11.69	60.32	0.00	106	319	AVERAGE																																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																			
1	4874.00	42.71	74.00	-31.29	59.06	34.20	9.52	60.87	0.00	---	---	PEAK																																																																																																																																	
2	7311.00	58.11	74.00	-15.89	71.11	35.64	11.69	60.33	0.00	265	103	PEAK																																																																																																																																	
3	7311.00	45.54	54.00	-8.46	58.53	35.64	11.69	60.32	0.00	265	103	AVERAGE																																																																																																																																	