



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2347-1
FCC ID : IHDT56AN1
STANDARD : 47 CFR Part 2, Part 27 Subpart Q
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S) : Jun. 26, 2023 ~ Jul. 07, 2023

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY..... 3
SUMMARY OF TEST RESULT 4
1 GENERAL DESCRIPTION 5
1.1 Applicant 5
1.2 Manufacturer 5
1.3 Product Feature of Equipment Under Test 5
1.4 Product Specification of Equipment Under Test 5
1.5 Modification of EUT 6
1.6 Maximum EIRP Power and Emission Designator 6
1.7 Testing Site 7
1.8 Test Software 7
1.9 Applied Standards 8
1.10 Specification of Accessory 8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 9
2.1 Test Mode 9
2.2 Connection Diagram of Test System 10
2.3 Support Unit used in test configuration and system 10
2.4 Measurement Results Explanation Example 10
2.5 Frequency List of Low/Middle/High Channels 11
3 CONDUCTED TEST ITEMS 12
3.1 Measuring Instruments 12
3.2 Test Setup 12
3.3 Test Result of Conducted Test 12
3.4 Conducted Output Power Measurement 13
3.5 Peak-to-Average Ratio 14
3.6 EIRP 15
3.7 Occupied Bandwidth 16
3.8 Conducted Band Edge Measurement 17
3.9 Conducted Spurious Emission Measurement 18
3.10 Frequency Stability Measurement 19
4 RADIATED TEST ITEMS 20
4.1 Measuring Instruments 20
4.2 Test Setup 20
4.3 Test Result of Radiated Test 21
4.4 Radiated Spurious Emission Measurement 22
5 LIST OF MEASURING EQUIPMENT 23
6 MEASUREMENT UNCERTAINTY 24
APPENDIX A. TEST RESULTS OF CONDUCTED TEST
APPENDIX B. TEST RESULTS OF RADIATED TEST
APPENDIX C. TEST SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG352602I	Rev. 01	Initial issue of report	Jul. 13, 2023



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	—	Report Only	-
3.5	§27.50 (k)(4)	Peak-to-Average Ratio	<13dB	PASS	
3.6	§27.50 (k)(3)	EIRP	EIRP < 1W (30dBm)	PASS	-
3.7	§2.1049	Occupied Bandwidth	—	Report Only	-
3.8	§2.1051 §27.53 (n)(2)	Conducted Band Edge Measurement	-13dBm/MHz	PASS	-
3.9	§2.1051 §27.53 (n)(2)	Conducted Spurious Emission	-13dBm/MHz	PASS	-
3.10	§2.1055 §27.54	Frequency Stability Temperature & Voltage	Within the band	PASS	-
4.4	§2.1053 §27.53 (n)(2)	Radiated Spurious Emission	-13dBm/MHz	PASS	Under limit 29.27 dB at 5061.18 MHz

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2347-1
FCC ID	IHDT56AN1
IMEI Code	Conducted: 357231700046956/357231700046964 Radiation: 357231700054430/357231700054448 357231700039373/357231700039381
HW Version	DVT2
SW Version	T3TC33.12
EUT Stage	Identical Prototype

1.4 Product Specification of Equipment Under Test

Product Feature	
Tx/Rx Frequency	5G NR n78: 3450 MHz ~ 3550 MHz
SCS	30kHz
Bandwidth	n78: 20 / 30 / 40 / 50 / 60 / 70 / 80 / 90 / 100MHz
Maximum Output Power to Antenna	Ant5: 23.52 dBm Ant1: 21.67 dBm Ant2: 22.78 dBm Ant8: 21.90 dBm
Antenna Gain	Ant5: -3.4 dBi Ant1: -4.6 dBi Ant2: -5.8 dBi Ant8: -5.2 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

Remark:

1. The maximum EIRP is calculated from max output power and max antenna gain, only the maximum

EIRP of Ant.5 for n78 are shown in the report.

2. 5G NR n78 support SA and NSA mode. The whole testing has assessed SA mode for n78 by referring to the higher conducted power for conducted test items.
3. The device supports n78(1T4R) SRS resources on ant.5/1/2/8, only the test data of worst ant.5 is showed in the report according to the maximum power.
4. All the supported EN-DC combinations are verified conducted power, only the EN-DC combination with highest power are shown in the report.
5. The EN-DC mode combination could be referred to the product spec.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum EIRP Power and Emission Designator

5G NR n78 SA		PI/2 BPSK / QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
20	3460.02 ~ 3540.00	0.0984	18M2G7D	0.0834	18M2W7D
30	3465.00 ~ 3534.99	0.1012	27M8G7D	0.0841	27M8W7D
40	3470.01 ~ 3529.98	0.1026	37M8G7D	0.0855	37M9W7D
50	3475.02 ~ 3525.00	0.0946	47M4G7D	0.0796	47M5W7D
60	3480.00 ~ 3519.99	0.0962	57M9G7D	0.0804	57M8W7D
70	3485.01 ~ 3514.98	0.0959	67M3G7D	0.0813	67M5W7D
80	3490.02 ~ 3510.00	0.0975	77M5G7D	0.0815	77M5W7D
90	3495.00 ~ 3504.99	0.0962	87M4G7D	0.0793	87M6W7D
100	3500.01	0.1028	97M8G7D	0.0845	97M7W7D

Note: All modulations have been tested, and only the worst test results of PSK & QAM are shown in the report.



1.7 Testing Site

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH01-SZ	CN1256	421272

1.8 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24

1.9 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, Part 27 Subpart Q
- ANSI C63.26-2015
- FCC KDB 971168 Power Meas License Digital Systems D01 v03r01
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

1.10 Specification of Accessory

Specification of Accessory			
AC Adapter 1(US)	Brand Name	Motorola(Salcomp)	Model Name MC-331
AC Adapter 1(EU)	Brand Name	Motorola(Salcomp)	Model Name MC-332
AC Adapter 1(UK)	Brand Name	Motorola(Salcomp)	Model Name MC-333
AC Adapter 1(AR)	Brand Name	Motorola(Salcomp)	Model Name MC-336
AC Adapter 1(BR)	Brand Name	Motorola(Salcomp)	Model Name MC-337
AC Adapter 1(CHILE)	Brand Name	Motorola(Salcomp)	Model Name MC-339
AC Adapter 2(US)	Brand Name	Motorola(Chenyang)	Model Name MC-331
AC Adapter 2(EU)	Brand Name	Motorola(Chenyang)	Model Name MC-332
AC Adapter 2(AR)	Brand Name	Motorola(Chenyang)	Model Name MC-336
AC Adapter 2(BR)	Brand Name	Motorola(Chenyang)	Model Name MC-337
AC Adapter 2(BR Local)	Brand Name	Motorola(Cliptech)	Model Name MC-337
AC Adapter 3(US)	Brand Name	Motorola(AOHAI)	Model Name MC-331
AC Adapter 3(EU)	Brand Name	Motorola(AOHAI)	Model Name MC-332
AC Adapter 3(UK)	Brand Name	Motorola(AOHAI)	Model Name MC-333
Battery 1	Brand Name	Motorola (Sunwoda)	Model Name QB50
Battery 2	Brand Name	Motorola (cosmx)	Model Name QB50
Bluetooth Earphone	Brand Name	Motorola (SGW)	Model Name Moto earbuds 135
USB Cable 1	Brand Name	Motorola (Juwei)	Model Name JWUB1580-T03H
USB Cable 2	Brand Name	Motorola (Saibao)	Model Name STN-A121A
USB Cable 3	Brand Name	Motorola (ISHENG)	Model Name SC18D38574

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.


Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Test Cases	Band	Bandwidth (MHz)	Modulation	RB #	Test Channel
		eg. 5M, 10M, 15M, 20M	eg. PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	1RB, Partial RB, Full RB	L/M/H
Max. Output Power	5G n78	20M, 30M, 40M, 50M,60M, 70M, 80M, 90M ,100M	All Modulations	1RB, Full RB	L, M, H
Peak-to-Average Ratio	5G n78	20M	PI/2 BPSK, QPSK	1RB, Full RB	M
E.I.R.P	5G n78	20M, 30M, 40M, 50M,60M, 70M, 80M, 90M ,100M	All Modulations	1RB, Full RB	L, M, H
26dB and 99% Bandwidth	5G n78	20M, 30M, 40M, 50M,60M, 70M, 80M, 90M ,100M	All Modulations	Full RB	M
Conducted Band Edge	5G n78	20M, 60M, 100M	PI/2 BPSK, QPSK	1RB, Full RB	L, H
Conducted Spurious Emission	5G n78	20M, 60M, 100M	PI/2 BPSK, QPSK	1RB	L, M, H
Frequency Stability	5G n78	20M	QPSK	Full RB	M
Radiated Spurious Emission	5G n78	Worst case from maximum power			M

Note:

1. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.
2. Frequency Stability: Normal Voltage = 3.91V ; Low Voltage =3.40V.; High Voltage =4.50V.

2.2 Connection Diagram of Test System

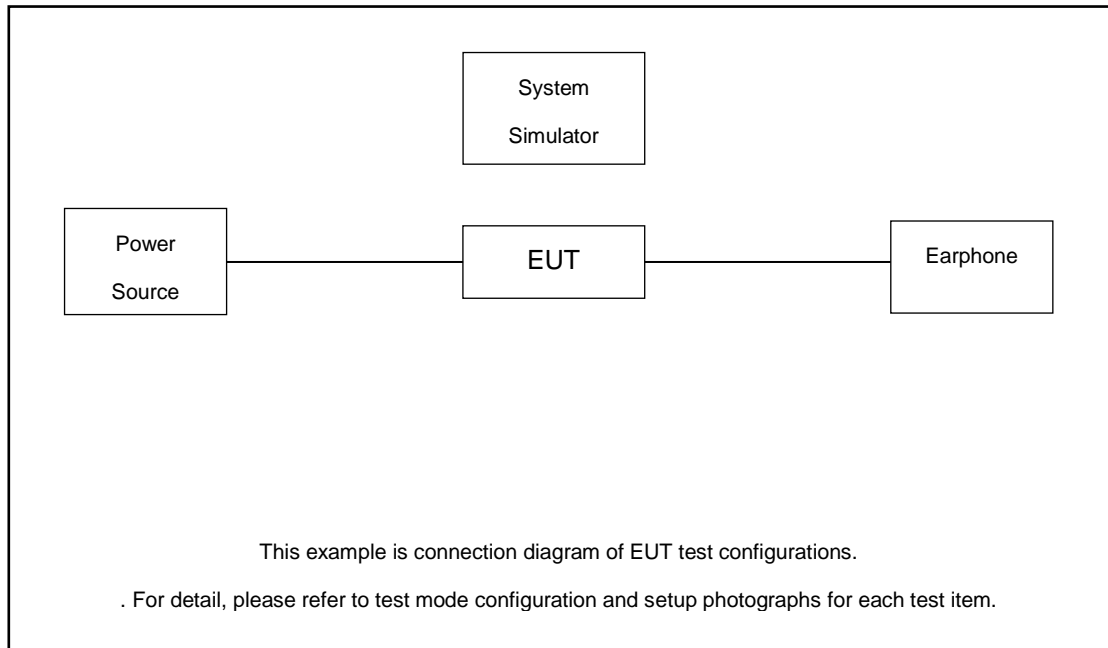

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m
4.	Earphone	Apple	MC690ZP/A	N/A	Shielded, 1.0m	N/A

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 8.7dB.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 8.7 \text{ (dB)} \end{aligned}$$

2.5 Frequency List of Low/Middle/High Channels

5G n78 Channel and Frequency List for SCS 30kHz				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	-	633334	-
	Frequency	-	3500.01	-
90	Channel	633000	633334	633666
	Frequency	3495	3500.01	3504.99
80	Channel	632668	633334	634000
	Frequency	3490.02	3500.01	3510
70	Channel	632334	633334	634332
	Frequency	3485.01	3500.01	3514.98
60	Channel	632000	633334	634666
	Frequency	3480	3500.01	3519.99
50	Channel	631668	633334	635000
	Frequency	3475.02	3500.01	3525
40	Channel	631334	633334	635332
	Frequency	3470.01	3500.01	3529.98
30	Channel	631000	633334	635666
	Frequency	3465	3500.01	3534.99
20	Channel	630668	633334	636000
	Frequency	3460.02	3500.01	3540


3 Conducted Test Items

3.1 Measuring Instruments

See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

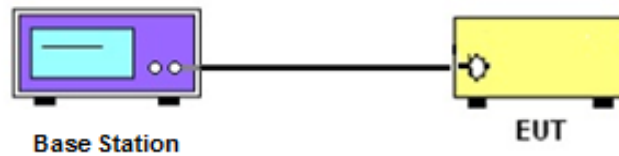

3.2.2 Peak-to-Average Ratio, Occupied / 26dB Bandwidth, Band-Edge and Conducted Spurious Emission



3.2.3 Frequency Stability

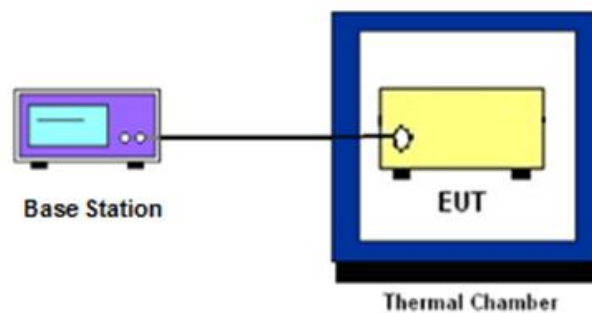

3.3 Test Result of Conducted Test

Please refer to Appendix A.



3.4 Conducted Output Power Measurement

3.4.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 EIRP

3.6.1 Description of EIRP Limit

§ 27.50 (k)(3)

Mobile devices are limited to 1Watt (30 dBm) EIRP. Mobile devices operating in these bands must employ a means for limiting power to the minimum necessary for successful communications

3.6.2 Test Procedures

1. According to KDB 412172 D01 Power Approach,
2. $EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where
 P_T = transmitter output power in dBm
 G_T = gain of the transmitting antenna in dBi
 L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.7 Occupied Bandwidth

3.7.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.8 Conducted Band Edge Measurement

3.8.1 Description of Conducted Band Edge Measurement

§ 27.53 (n)(2)

For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.

Compliance with this paragraph is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed, but limited to a maximum of 200 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq 1\%$ EBW but limited to a maximum of 200 kHz in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz and 5 MHz removed from the band edge, set RBW ≥ 500 KHz.
6. Beyond the 5 MHz removed from the band edge, set RBW = 1MHz.
7. Set spectrum analyzer with RMS detector.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. Checked that all the results comply with the emission limit line.

3.9 Conducted Spurious Emission Measurement

3.9.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges shall not exceed -13 dBm/MHz.

It is measured by means of a calibrated spectrum analyzer and scanned from 9 kHz up to a frequency including its 10th harmonic.

3.9.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. Checked that all the results comply with the emission limit line.

3.10 Frequency Stability Measurement

3.10.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

3.10.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.10.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5.
2. The EUT was placed in a temperature chamber at 20±5°C and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

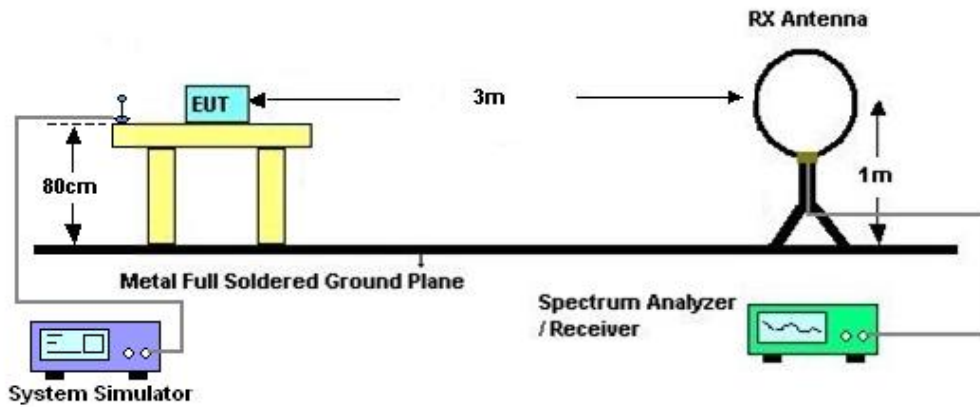

4.2.2 For radiated test from 30MHz to 1GHz

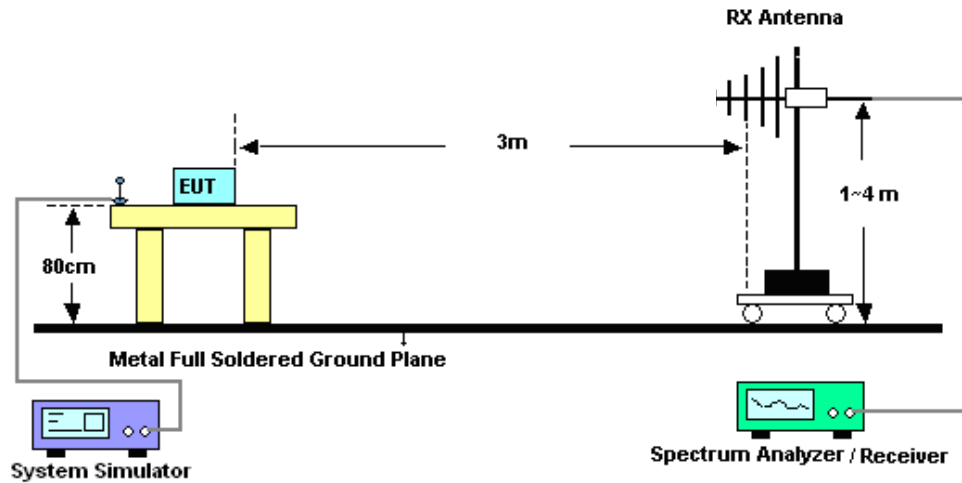

4.2.3 For radiated test above 1GHz

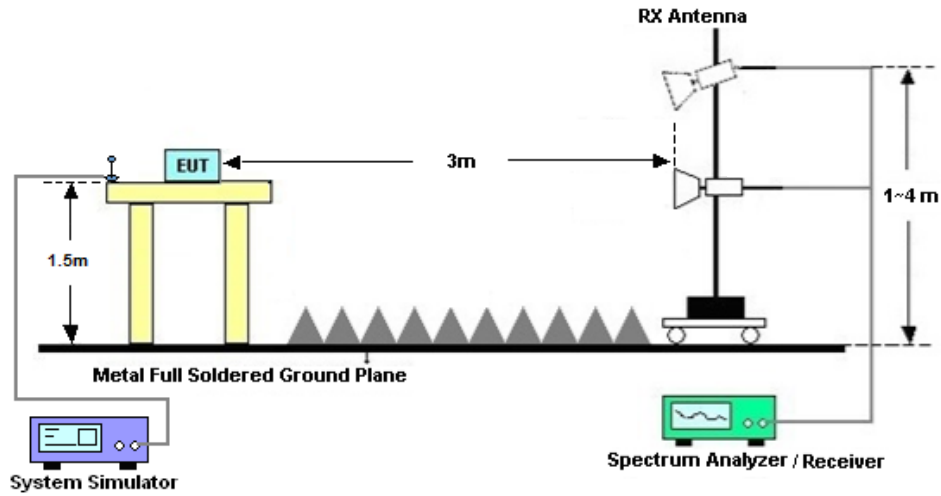

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Radiated Spurious Emission Measurement

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI/TIA-603-E. The power of any emission outside of the authorized operating frequency ranges shall not exceed -13 dBm/MHz.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
$$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$
$$\text{ERP (dBm)} = \text{EIRP} - 2.15$$
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 06, 2023	Jun. 26, 2023	Apr. 05, 2024	Conducted (TH01-SZ)
DC Power Supply	TTI	PL330P	290070	Max 32V , 3A	Oct. 17, 2022	Jun. 26, 2023	Oct. 16, 2023	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-04 265	60.06.020.007 7	0.4GHz~26.5GHz	Dec. 25, 2022	Jun. 26, 2023	Dec. 24, 2023	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Jul. 07, 2022	Jun. 26, 2023	Jul. 06, 2023	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec. 26, 2022	Jul. 07, 2023	Dec. 25, 2023	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jul. 28, 2022	Jul. 07, 2023	Jul. 27, 2024	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5Ghz	Oct. 19, 2022	Jul. 07, 2023	Oct. 18, 2023	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	Sep. 28, 2021	Jul. 07, 2023	Sep. 27, 2023	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 06, 2023	Jul. 07, 2023	Jul. 05, 2024	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Apr. 08,2023	Jul. 07, 2023	Apr. 07,2024	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 04, 2023	Jul. 07, 2023	Apr. 03, 2024	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P-R	1943528	1GHz~18GHz	Oct. 19, 2022	Jul. 07, 2023	Oct. 18, 2023	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35 -HG	1871923	18GHz~40GHz	Jul. 05, 2023	Jul. 07, 2023	Jul. 04, 2024	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	Nov. 10, 2022	Jul. 07, 2023	Nov. 09, 2023	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Jul. 07, 2023	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Jul. 07, 2023	NCR	Radiation (03CH01-SZ)

NCR: No Calibration Required

6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±1.34 dB
Conducted Emissions	±1.34 dB
Occupied Channel Bandwidth	±0.13 %

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.48dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.53dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.02dB
---	--------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Khan	Temperature :	21~23°C
		Relative Humidity :	45~51%

FR1 N78(ANT5)

Transmitter Conducted Output Power And EIRP, (G_T - L_C)=-3.4dB

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
78	30	20	630668	3460.02	DFT-s-OFDM QPSK	1@1	23.25	19.85	0.0966
78	30	20	630668	3460.02	DFT-s-OFDM 16 QAM	1@1	22.51	19.11	0.0815
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	1@1	23.17	19.77	0.0948
78	30	20	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	22.61	19.21	0.0834
78	30	20	636000	3540	DFT-s-OFDM QPSK	1@1	23.33	19.93	0.0984
78	30	20	636000	3540	DFT-s-OFDM 16 QAM	1@1	22.53	19.13	0.0818
78	30	30	631000	3465	DFT-s-OFDM QPSK	1@1	23.45	20.05	0.1012
78	30	30	631000	3465	DFT-s-OFDM 16 QAM	1@1	22.65	19.25	0.0841
78	30	30	633334	3500.01	DFT-s-OFDM QPSK	1@1	23.37	19.97	0.0993
78	30	30	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	22.59	19.19	0.0830
78	30	30	635666	3534.99	DFT-s-OFDM QPSK	1@1	23.38	19.98	0.0995
78	30	30	635666	3534.99	DFT-s-OFDM 16 QAM	1@1	22.6	19.2	0.0832
78	30	40	631334	3470.01	DFT-s-OFDM QPSK	1@1	23.49	20.09	0.1021
78	30	40	631334	3470.01	DFT-s-OFDM 16 QAM	1@1	22.69	19.29	0.0849
78	30	40	633334	3500.01	DFT-s-OFDM QPSK	1@1	23.38	19.98	0.0995
78	30	40	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	22.72	19.32	0.0855
78	30	40	635332	3529.98	DFT-s-OFDM QPSK	1@1	23.51	20.11	0.1026
78	30	40	635332	3529.98	DFT-s-OFDM 16 QAM	1@1	22.68	19.28	0.0847
78	30	50	631668	3475.02	DFT-s-OFDM QPSK	1@1	23.16	19.76	0.0946
78	30	50	631668	3475.02	DFT-s-OFDM 16 QAM	1@1	22.39	18.99	0.0793
78	30	50	633334	3500.01	DFT-s-OFDM QPSK	1@1	23.16	19.76	0.0946
78	30	50	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	22.41	19.01	0.0796
78	30	50	635000	3525	DFT-s-OFDM QPSK	1@1	23.01	19.61	0.0914
78	30	50	635000	3525	DFT-s-OFDM 16 QAM	1@1	22.24	18.84	0.0766
78	30	60	632000	3480	DFT-s-OFDM QPSK	1@1	23.23	19.83	0.0962
78	30	60	632000	3480	DFT-s-OFDM 16 QAM	1@1	22.45	19.05	0.0804
78	30	60	633334	3500.01	DFT-s-OFDM QPSK	1@1	23.22	19.82	0.0959
78	30	60	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	22.43	19.03	0.0800
78	30	60	634666	3519.99	DFT-s-OFDM QPSK	1@1	23.22	19.82	0.0959

78	30	60	634666	3519.99	DFT-s-OFDM 16 QAM	1@1	22.41	19.01	0.0796
78	30	70	632334	3485.01	DFT-s-OFDM QPSK	1@1	23.21	19.81	0.0957
78	30	70	632334	3485.01	DFT-s-OFDM 16 QAM	1@1	22.41	19.01	0.0796
78	30	70	633334	3500.01	DFT-s-OFDM QPSK	1@1	23.22	19.82	0.0959
78	30	70	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	22.45	19.05	0.0804
78	30	70	634332	3514.98	DFT-s-OFDM QPSK	1@1	23.2	19.8	0.0955
78	30	70	634332	3514.98	DFT-s-OFDM 16 QAM	1@1	22.5	19.1	0.0813
78	30	80	632668	3490.02	DFT-s-OFDM QPSK	1@1	23.08	19.68	0.0929
78	30	80	632668	3490.02	DFT-s-OFDM 16 QAM	1@1	22.28	18.88	0.0773
78	30	80	633334	3500.01	DFT-s-OFDM QPSK	1@1	23	19.6	0.0912
78	30	80	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	22.22	18.82	0.0762
78	30	80	634000	3510	DFT-s-OFDM QPSK	1@1	23.29	19.89	0.0975
78	30	80	634000	3510	DFT-s-OFDM 16 QAM	1@1	22.51	19.11	0.0815
78	30	90	633000	3495	DFT-s-OFDM QPSK	1@1	23.12	19.72	0.0938
78	30	90	633000	3495	DFT-s-OFDM 16 QAM	1@1	22.35	18.95	0.0785
78	30	90	633334	3500.01	DFT-s-OFDM QPSK	1@1	23.07	19.67	0.0927
78	30	90	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	22.39	18.99	0.0793
78	30	90	633666	3504.99	DFT-s-OFDM QPSK	1@1	23.23	19.83	0.0962
78	30	90	633666	3504.99	DFT-s-OFDM 16 QAM	1@1	22.36	18.96	0.0787
78	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	135@67	23.29	19.89	0.0975
78	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	23.52	20.12	0.1028
78	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@271	23.06	19.66	0.0925
78	30	100	633334	3500.01	DFT-s-OFDM QPSK	135@67	23.28	19.88	0.0973
78	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@1	23.4	20	0.1000
78	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@271	23.1	19.7	0.0933
78	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	135@67	22.35	18.95	0.0785
78	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	22.67	19.27	0.0845
78	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	1@271	22.25	18.85	0.0767
78	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	135@67	20.81	17.41	0.0551
78	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	1@1	20.81	17.41	0.0551
78	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	1@271	20.35	16.95	0.0495
78	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	135@67	18.86	15.46	0.0352
78	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	1@1	18.79	15.39	0.0346
78	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	1@271	18.39	14.99	0.0316
78	30	100	633334	3500.01	CP-OFDM QPSK	137@68	21.85	18.45	0.0700

78	30	100	633334	3500.01	CP-OFDM QPSK	1@1	22	18.6	0.0724
78	30	100	633334	3500.01	CP-OFDM QPSK	1@271	21.57	18.17	0.0656


Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0066	PASS	NV
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0049	PASS	LV
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0027	PASS	HV
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0059	PASS	-30°C
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0027	PASS	-20°C
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0042	PASS	-10°C
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0059	PASS	0°C
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0033	PASS	10°C
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0066	PASS	20°C
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0068	PASS	30°C
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0050	PASS	40°C
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0057	PASS	50°C


Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
78	30	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	50@0	7.22	13	PASS
78	30	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@0	7.27	13	PASS
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	8.39	13	PASS
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	1@0	8.88	13	PASS


N78(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

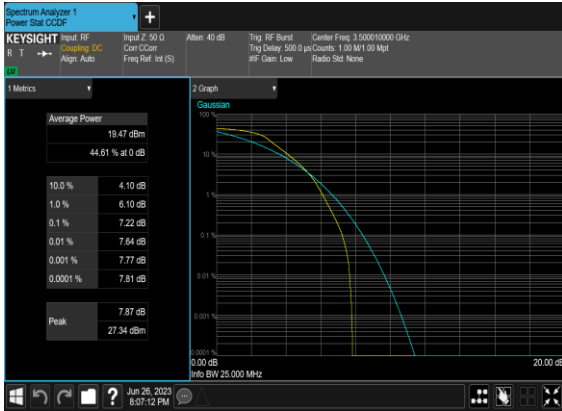

N78(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Mid_CH

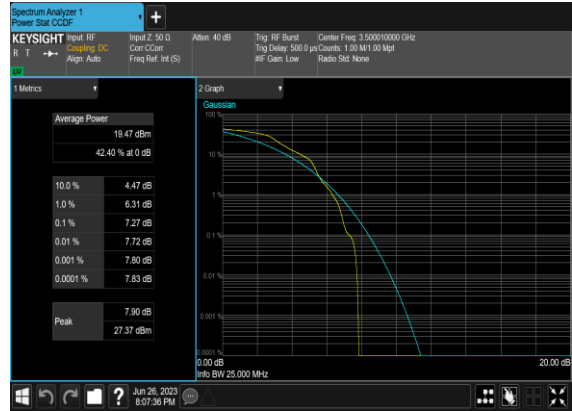

N78(20M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

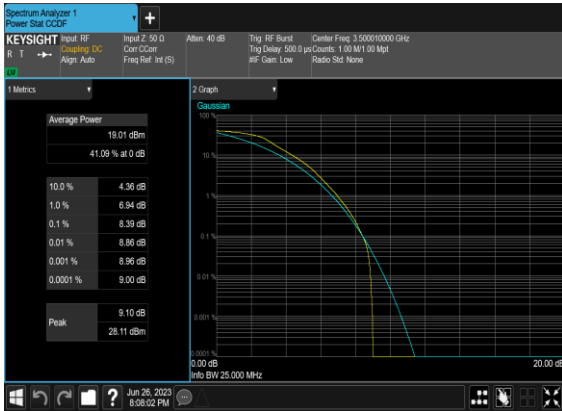

N78(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH




Occupied Bandwidth


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
78	30	20	633334	3500.01	CP-OFDM QPSK	51@0	18.195	19.19
78	30	20	633334	3500.01	CP-OFDM 16 QAM	51@0	18.213	19.32
78	30	20	633334	3500.01	CP-OFDM 64 QAM	51@0	18.215	19.04
78	30	20	633334	3500.01	CP-OFDM 256 QAM	51@0	18.2	19.19
78	30	30	633334	3500.01	CP-OFDM QPSK	78@0	27.761	28.93
78	30	30	633334	3500.01	CP-OFDM 16 QAM	78@0	27.849	29.14
78	30	30	633334	3500.01	CP-OFDM 64 QAM	78@0	27.797	28.91
78	30	30	633334	3500.01	CP-OFDM 256 QAM	78@0	27.743	29.09
78	30	40	633334	3500.01	CP-OFDM QPSK	106@0	37.848	39.16
78	30	40	633334	3500.01	CP-OFDM 16 QAM	106@0	37.894	39.24
78	30	40	633334	3500.01	CP-OFDM 64 QAM	106@0	37.898	39.12
78	30	40	633334	3500.01	CP-OFDM 256 QAM	106@0	37.863	39.26
78	30	50	633334	3500.01	CP-OFDM QPSK	133@0	47.399	49.14
78	30	50	633334	3500.01	CP-OFDM 16 QAM	133@0	47.433	49.04
78	30	50	633334	3500.01	CP-OFDM 64 QAM	133@0	47.416	49.08
78	30	50	633334	3500.01	CP-OFDM 256 QAM	133@0	47.53	49.11
78	30	60	633334	3500.01	CP-OFDM QPSK	162@0	57.926	59.84
78	30	60	633334	3500.01	CP-OFDM 16 QAM	162@0	57.65	59.69
78	30	60	633334	3500.01	CP-OFDM 64 QAM	162@0	57.782	59.71
78	30	60	633334	3500.01	CP-OFDM 256 QAM	162@0	57.823	59.59
78	30	70	633334	3500.01	CP-OFDM QPSK	189@0	67.304	69.56
78	30	70	633334	3500.01	CP-OFDM 16 QAM	189@0	67.362	69.56
78	30	70	633334	3500.01	CP-OFDM 64 QAM	189@0	67.45	69.52
78	30	70	633334	3500.01	CP-OFDM 256 QAM	189@0	67.48	69.62
78	30	80	633334	3500.01	CP-OFDM QPSK	217@0	77.542	79.97

78	30	80	633334	3500.01	CP-OFDM 16 QAM	217@0	77.478	79.89
78	30	80	633334	3500.01	CP-OFDM 64 QAM	217@0	77.529	79.97
78	30	80	633334	3500.01	CP-OFDM 256 QAM	217@0	77.369	79.86
78	30	90	633334	3500.01	CP-OFDM QPSK	245@0	87.42	90.19
78	30	90	633334	3500.01	CP-OFDM 16 QAM	245@0	87.377	90.17
78	30	90	633334	3500.01	CP-OFDM 64 QAM	245@0	87.483	90.22
78	30	90	633334	3500.01	CP-OFDM 256 QAM	245@0	87.599	90.41
78	30	100	633334	3500.01	CP-OFDM QPSK	273@0	97.758	100.5
78	30	100	633334	3500.01	CP-OFDM 16 QAM	273@0	97.322	100.5
78	30	100	633334	3500.01	CP-OFDM 64 QAM	273@0	97.389	100.6
78	30	100	633334	3500.01	CP-OFDM 256 QAM	273@0	97.654	100.4

N78(20M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

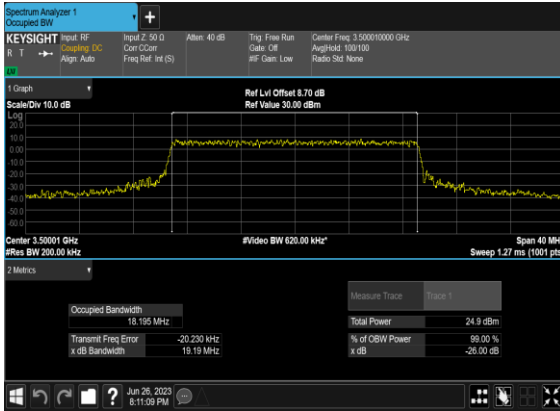


N78(20M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

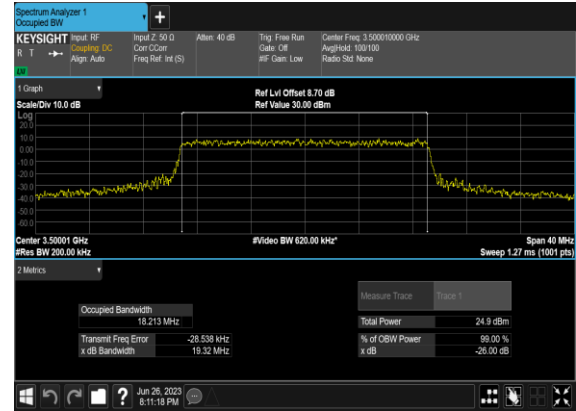


N78(20M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH




N78(20M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

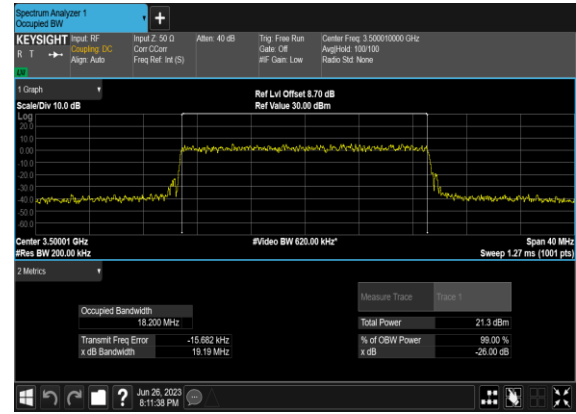


N78(30M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

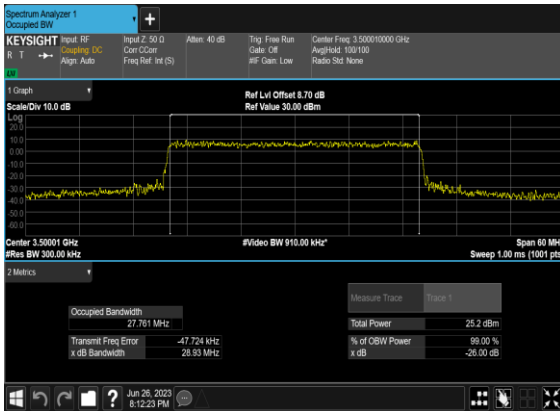


N78(30M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

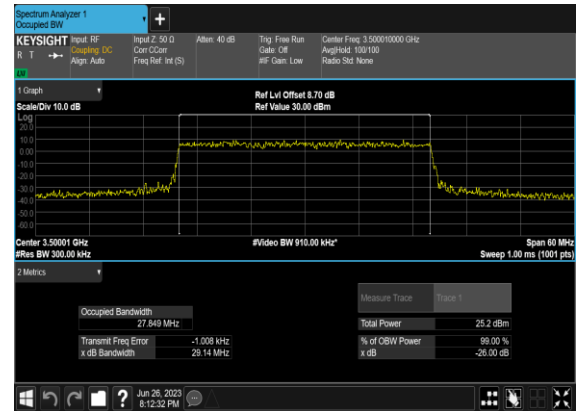


N78(30M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

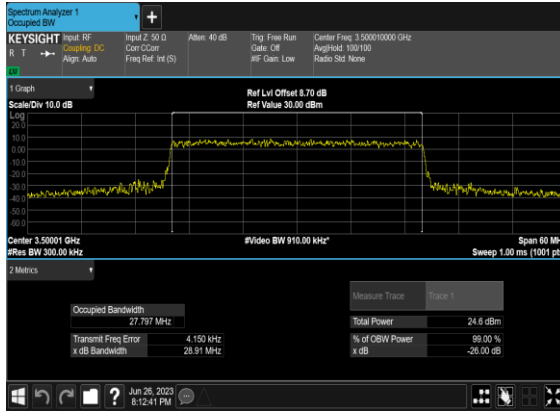


N78(30M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

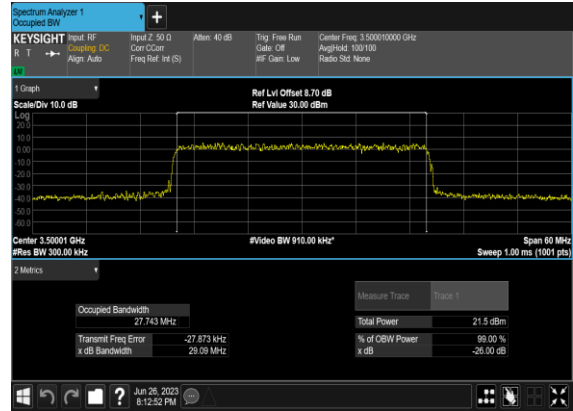


N78(40M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

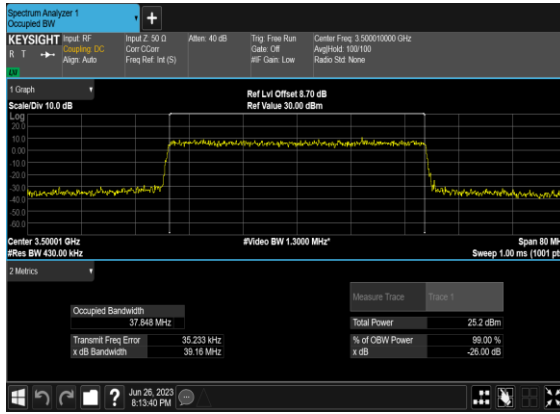


N78(40M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

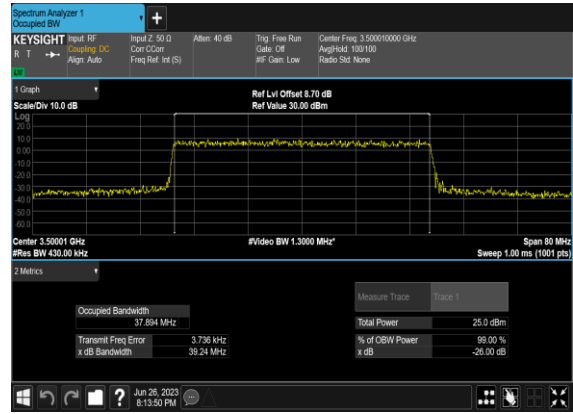


N78(40M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

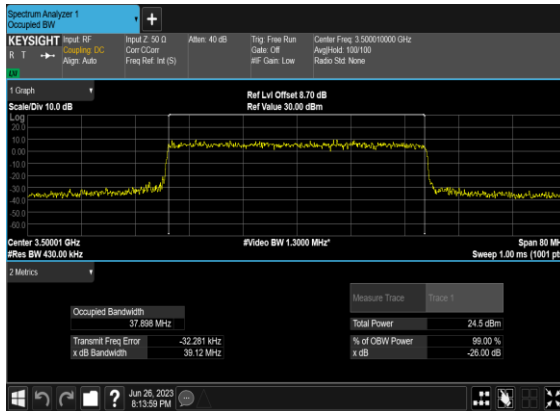


N78(40M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

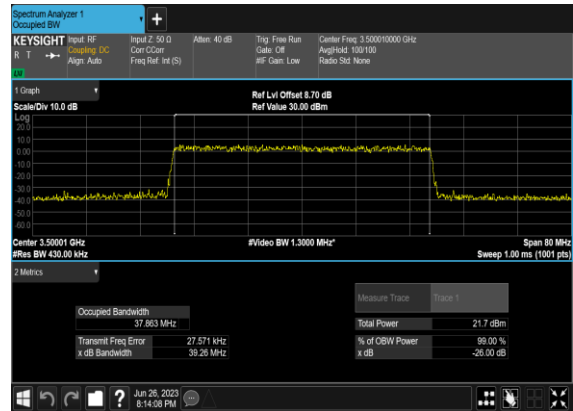


N78(50M)_CP- OFDM_QPSK_Outer_Full_Mid_CH

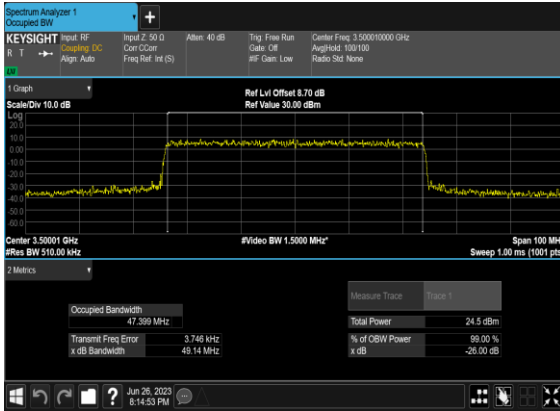


N78(50M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

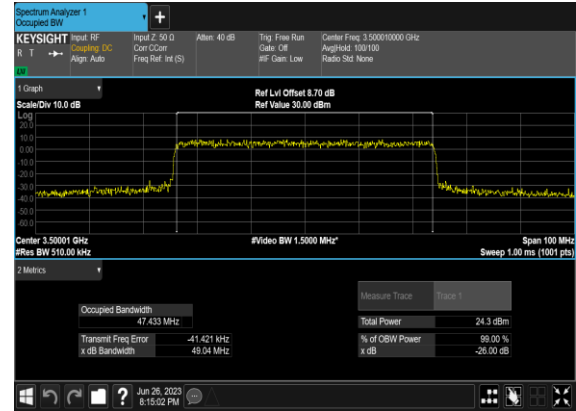


N78(50M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

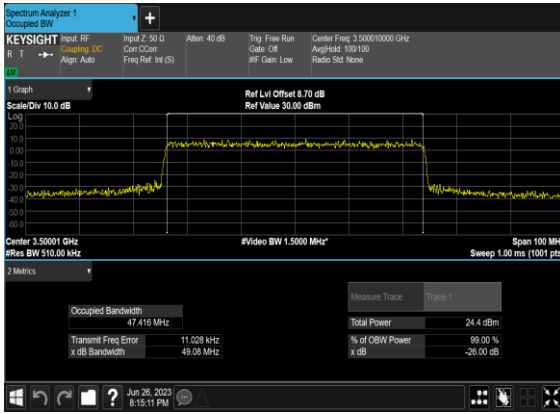


N78(50M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

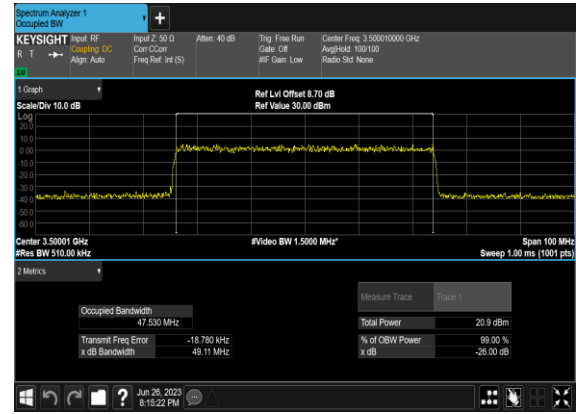


N78(60M)_CP- OFDM_QPSK_Outer_Full_Mid_CH

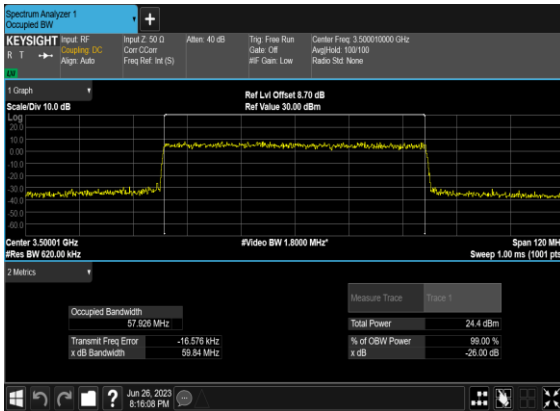


N78(60M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

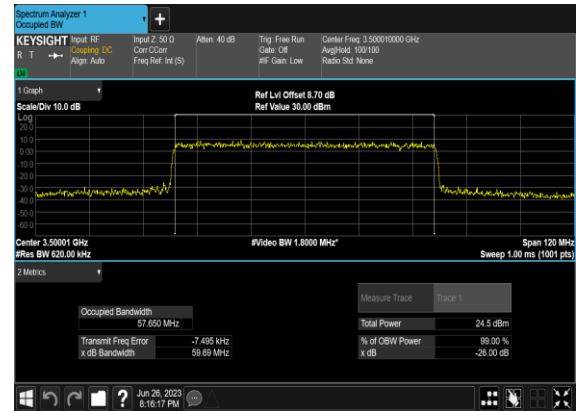


N78(60M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

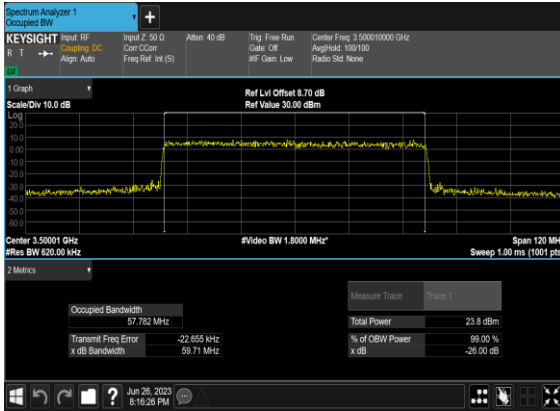

N78(60M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

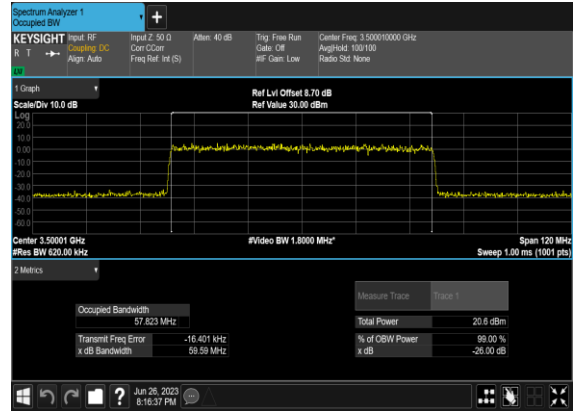


N78(70M)_CP- OFDM_QPSK_Outer_Full_Mid_CH

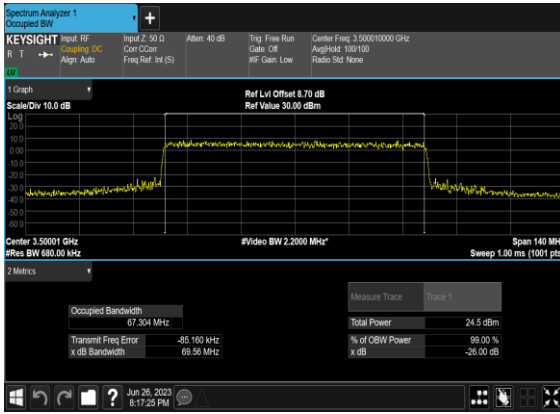


N78(70M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH




N78(70M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

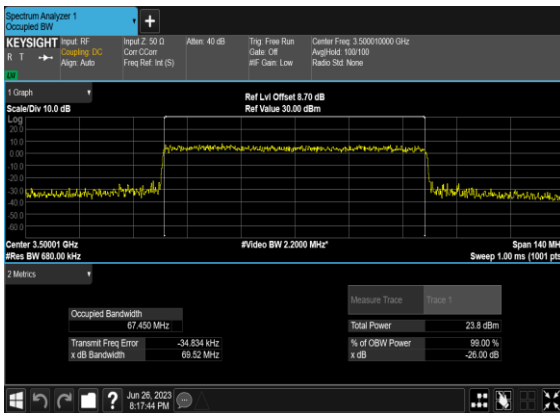


N78(70M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

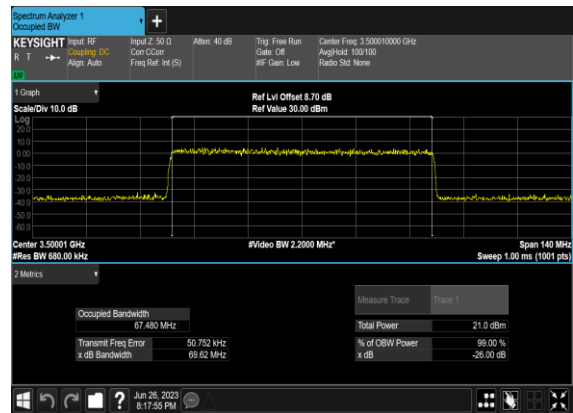


N78(80M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

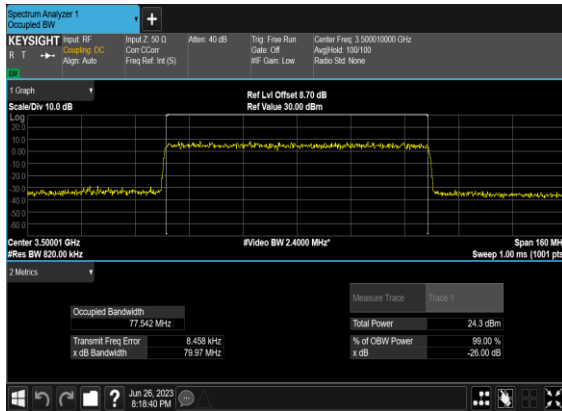


N78(80M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

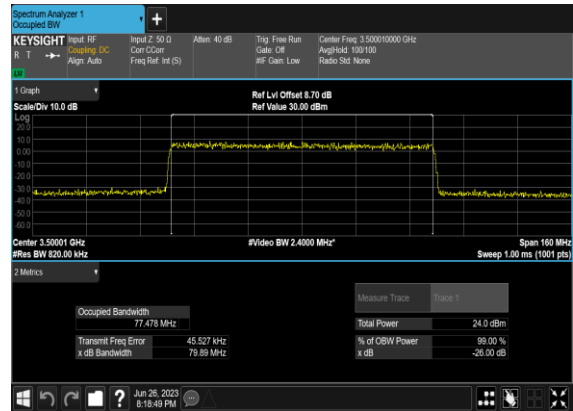


N78(80M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

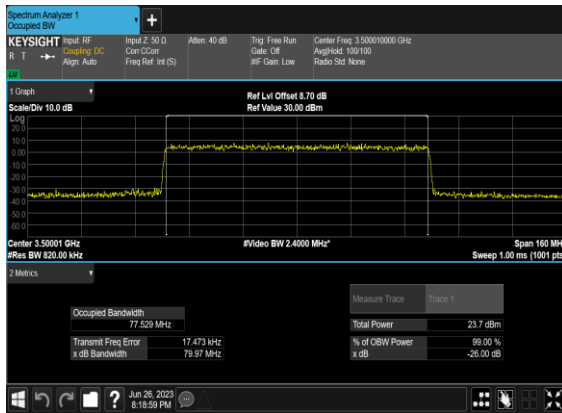


N78(80M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

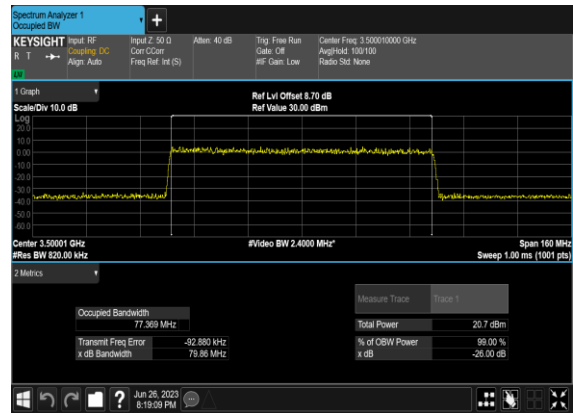


N78(90M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

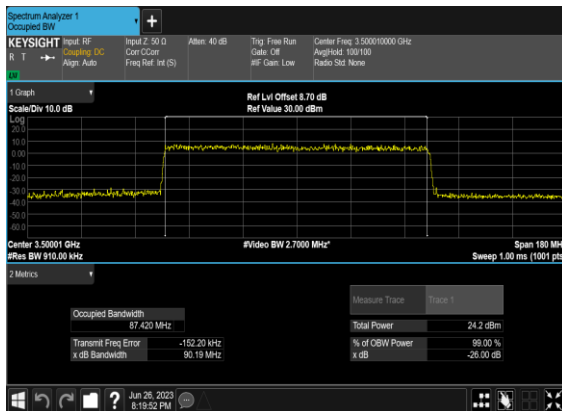


N78(90M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

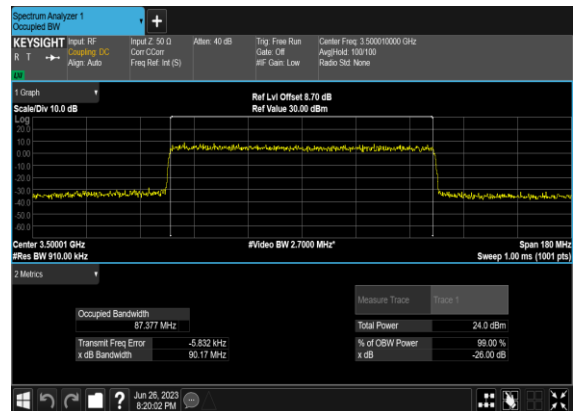


N78(90M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

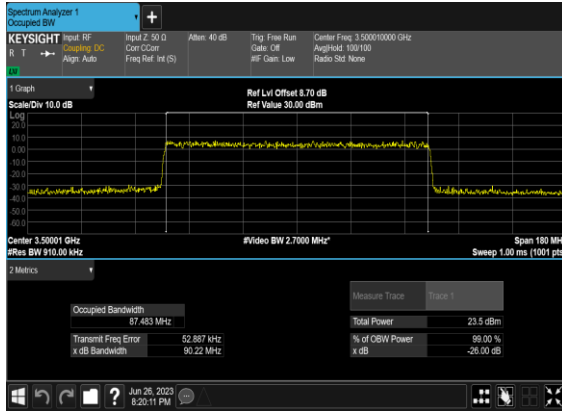


N78(90M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

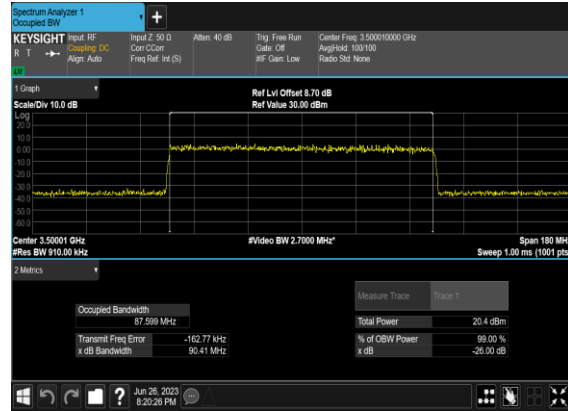


N78(100M)_CP- OFDM_QPSK_Outer_Full_Mid_CH

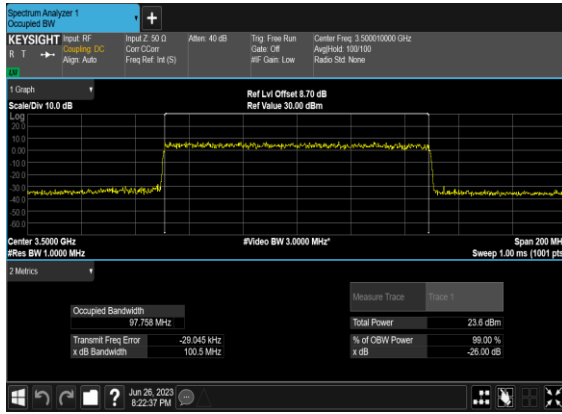


N78(100M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

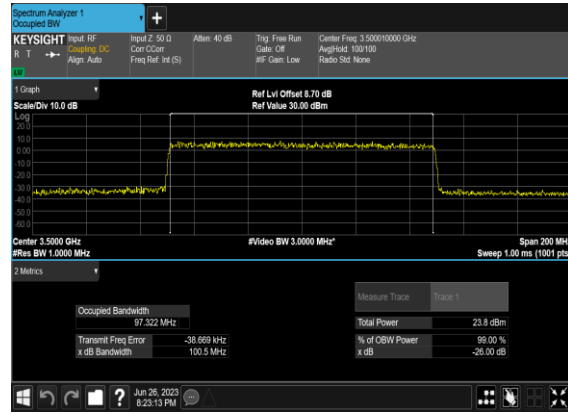

N78(100M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

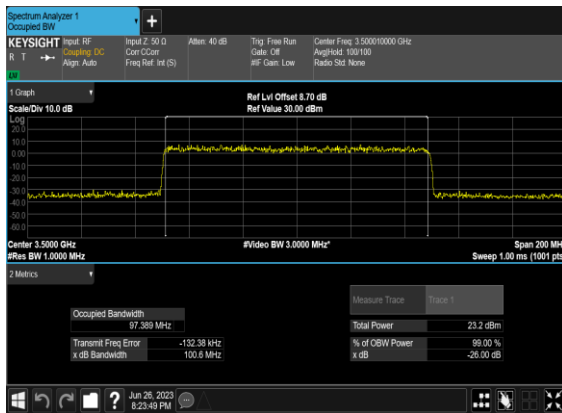

N78(100M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

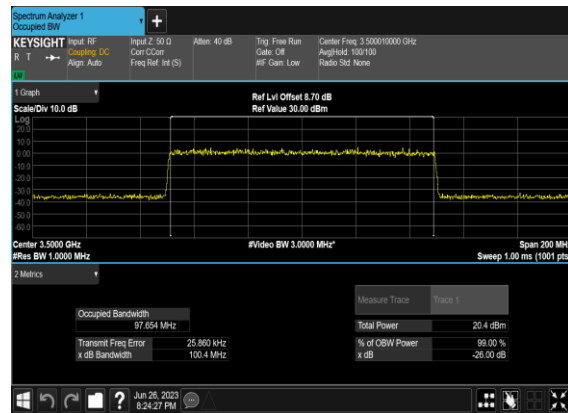


Conducted Spurious Emissions


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
78	30	20	630668	3460.02	DFT-s-OFDM BPSK	1@0	see graph	---
78	30	20	630668	3460.02	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	20	630668	3460.02	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	20	630668	3460.02	DFT-s-OFDM QPSK	1@0	see graph	---
78	30	20	630668	3460.02	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	20	630668	3460.02	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	20	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	---
78	30	20	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	20	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	---
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	20	636000	3540.0	DFT-s-OFDM BPSK	1@0	see graph	---
78	30	20	636000	3540.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	20	636000	3540.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	20	636000	3540.0	DFT-s-OFDM QPSK	1@0	see graph	---
78	30	20	636000	3540.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	20	636000	3540.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	60	632000	3480.0	DFT-s-OFDM BPSK	1@0	see graph	---
78	30	60	632000	3480.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	60	632000	3480.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	60	632000	3480.0	DFT-s-OFDM QPSK	1@0	see graph	---

78	30	60	632000	3480.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	60	632000	3480.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	60	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	---
78	30	60	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	60	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	60	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	---
78	30	60	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	60	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	60	634666	3519.99	DFT-s-OFDM BPSK	1@0	see graph	---
78	30	60	634666	3519.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	60	634666	3519.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	60	634666	3519.99	DFT-s-OFDM QPSK	1@0	see graph	---
78	30	60	634666	3519.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	60	634666	3519.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	---
78	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	---
78	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS


N78(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

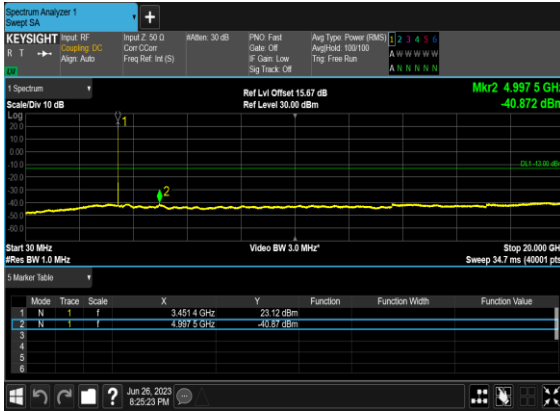


N78(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

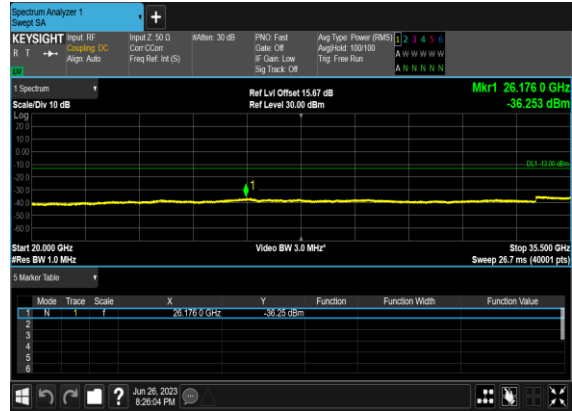

N78(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

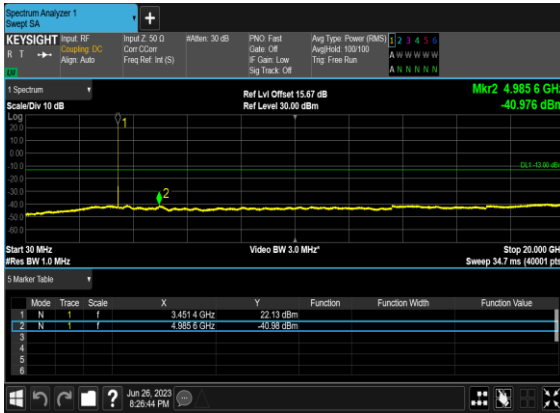


N78(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

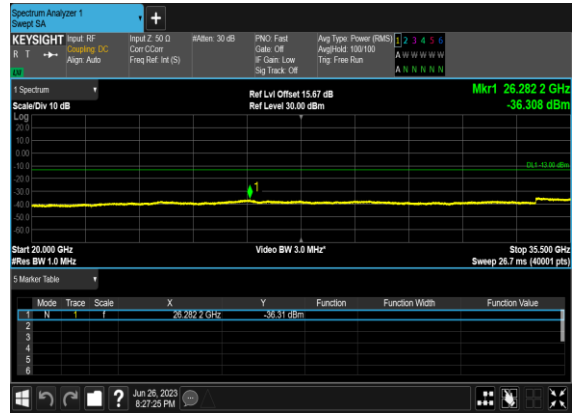

N78(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH




N78(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

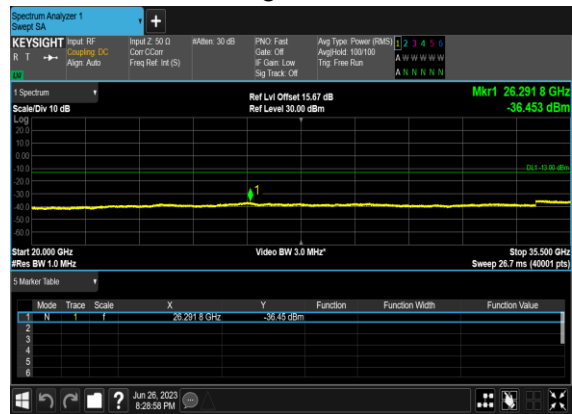

N78(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH




N78(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

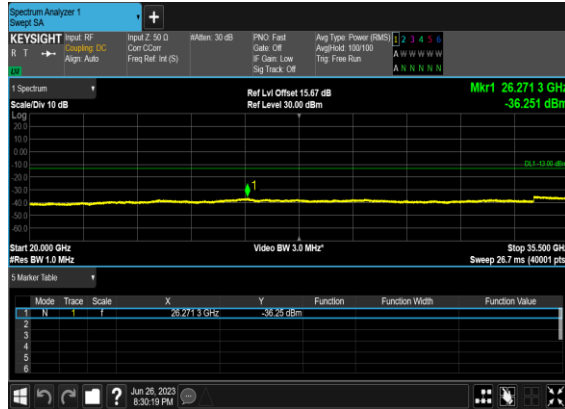


N78(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH




N78(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH

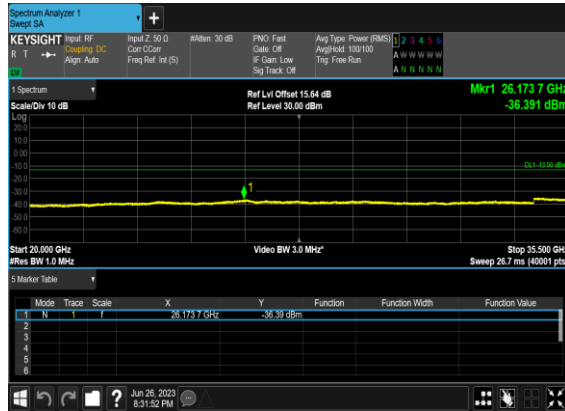

N78(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

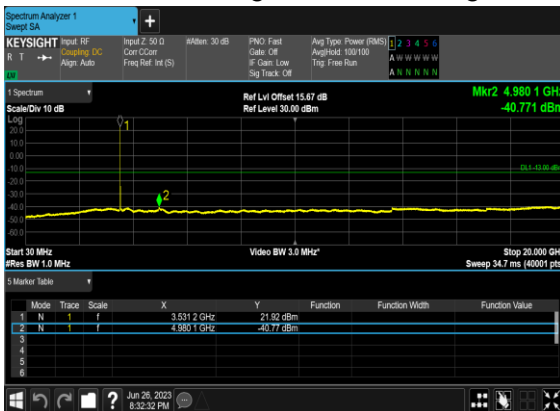


N78(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

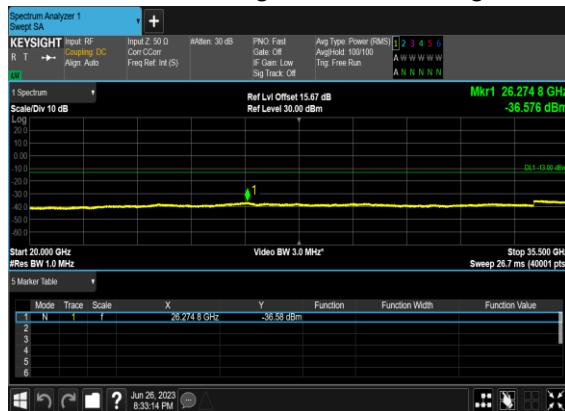


N78(60M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH




N78(60M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

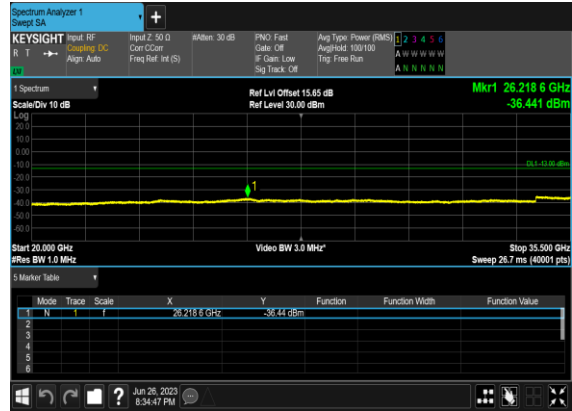


N78(60M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

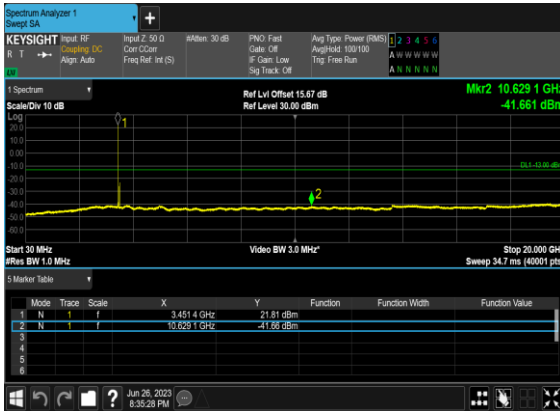


N78(60M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

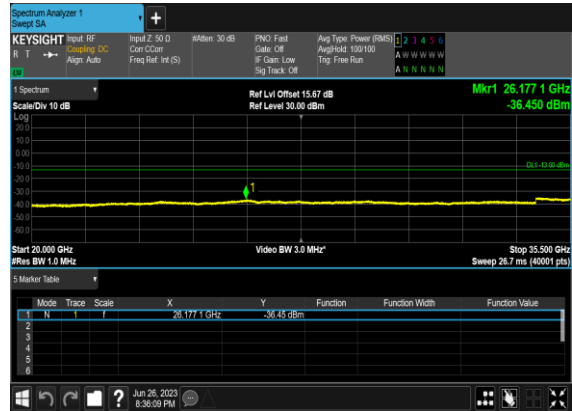

N78(60M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

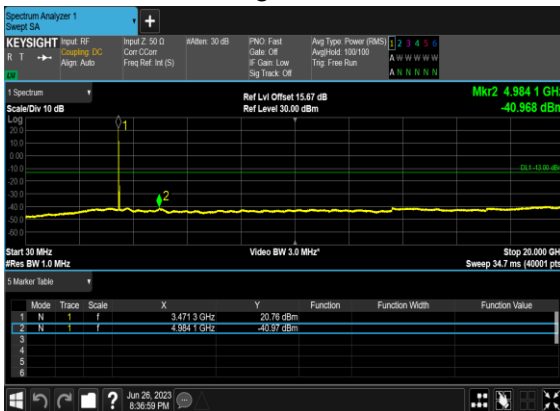


N78(60M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

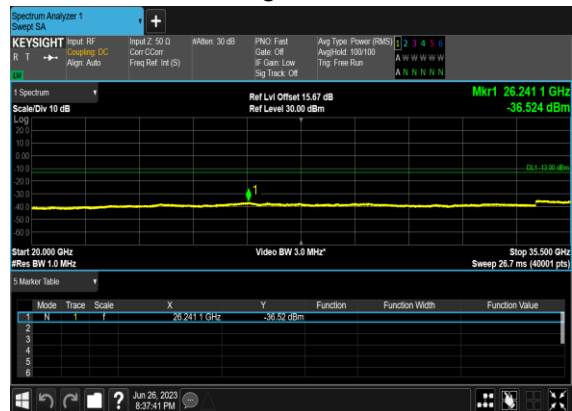


N78(60M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH




N78(60M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

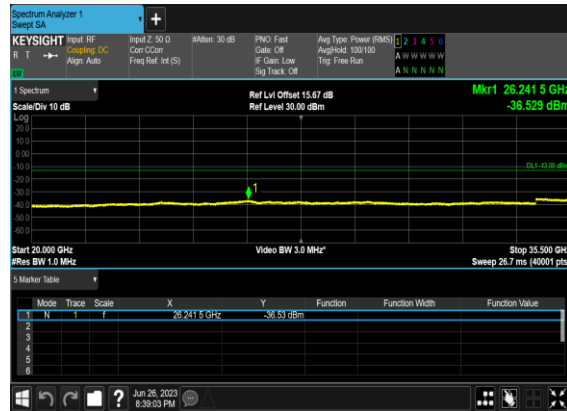


N78(60M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH

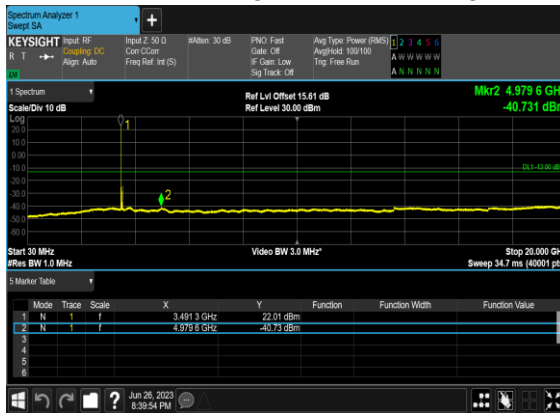

N78(60M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH

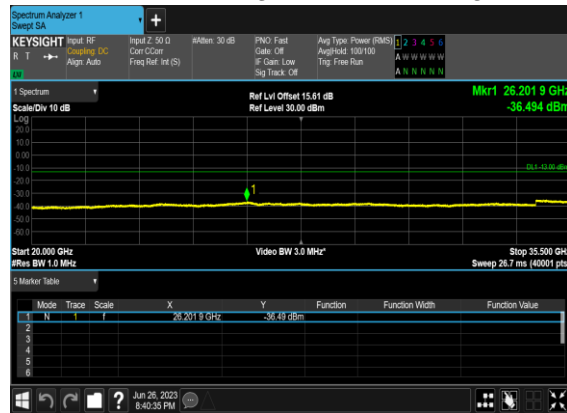

N78(60M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

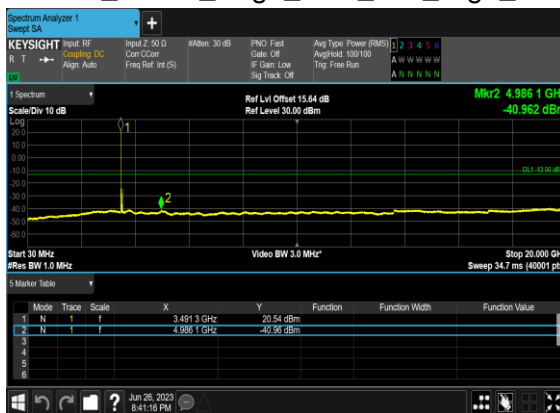


N78(60M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH




N78(100M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH




N78(100M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

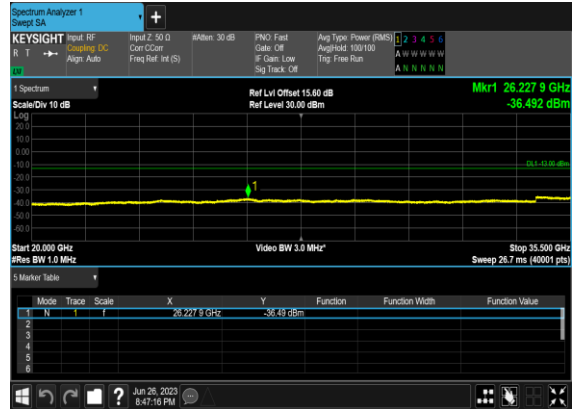

N78(100M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

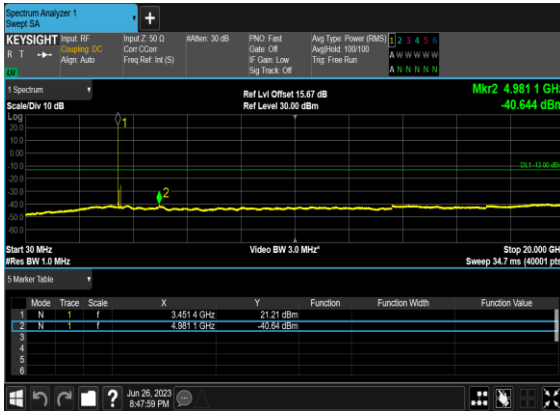

N78(100M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

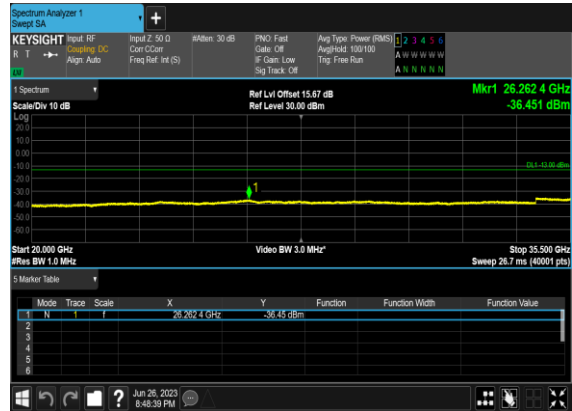


Conducted Band Edge

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
78	30	20	630668	3460.02	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	20	630668	3460.02	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	20	630668	3460.02	DFT-s-OFDM BPSK	50@0	see graph	PASS
78	30	20	630668	3460.02	DFT-s-OFDM QPSK	50@0	see graph	PASS
78	30	20	636000	3540.0	DFT-s-OFDM BPSK	1@50	see graph	PASS
78	30	20	636000	3540.0	DFT-s-OFDM QPSK	1@50	see graph	PASS
78	30	20	636000	3540.0	DFT-s-OFDM BPSK	50@0	see graph	PASS
78	30	20	636000	3540.0	DFT-s-OFDM QPSK	50@0	see graph	PASS
78	30	60	632000	3480.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	60	632000	3480.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	60	632000	3480.0	DFT-s-OFDM BPSK	162@0	see graph	PASS
78	30	60	632000	3480.0	DFT-s-OFDM QPSK	162@0	see graph	PASS
78	30	60	634666	3519.99	DFT-s-OFDM BPSK	1@161	see graph	PASS
78	30	60	634666	3519.99	DFT-s-OFDM QPSK	1@161	see graph	PASS
78	30	60	634666	3519.99	DFT-s-OFDM BPSK	162@0	see graph	PASS
78	30	60	634666	3519.99	DFT-s-OFDM QPSK	162@0	see graph	PASS
78	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@272	see graph	PASS
78	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@272	see graph	PASS
78	30	100	633334	3500.01	DFT-s-OFDM BPSK	270@0	see graph	PASS
78	30	100	633334	3500.01	DFT-s-OFDM QPSK	270@0	see graph	PASS


N78(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH




N78(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

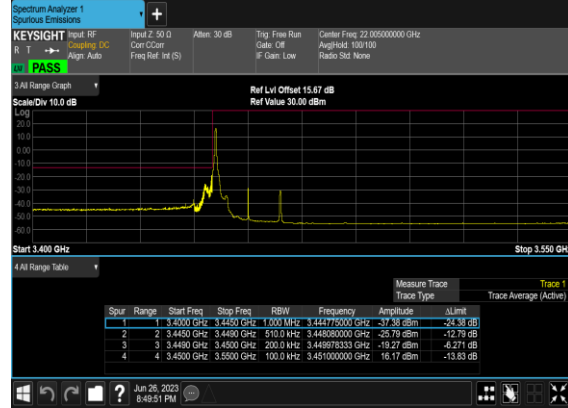


N78(20M)_DFT-s-OFDM_BPSK_Outer_Full_Low_CH

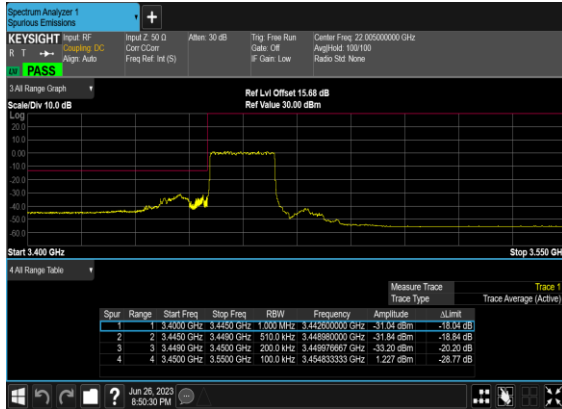


N78(20M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH

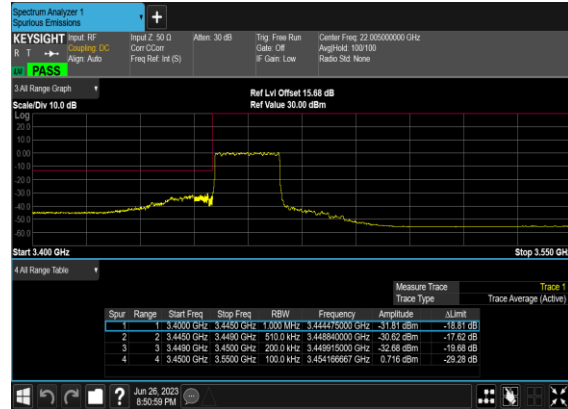

N78(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Right_High_CH

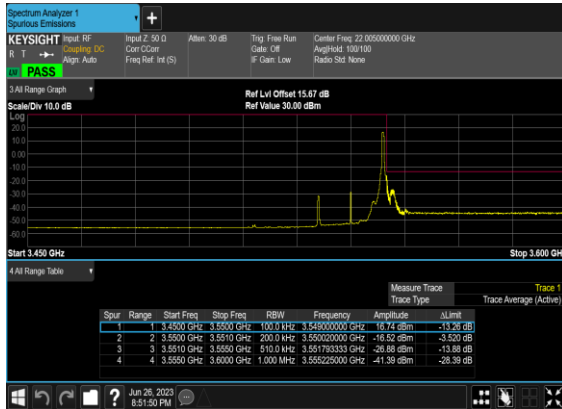

N78(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_High_CH

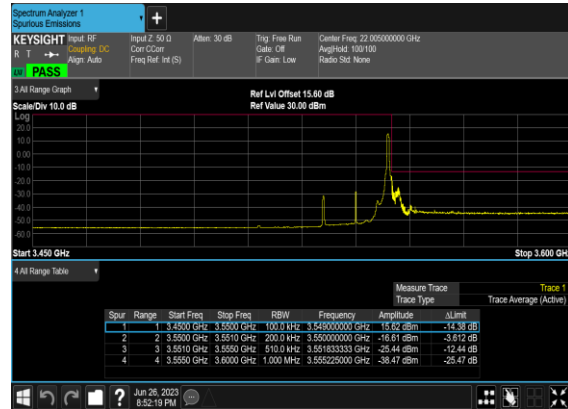


N78(20M)_DFT-s-OFDM_BPSK_Outer_Full_High_CH




N78(20M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH




N78(60M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

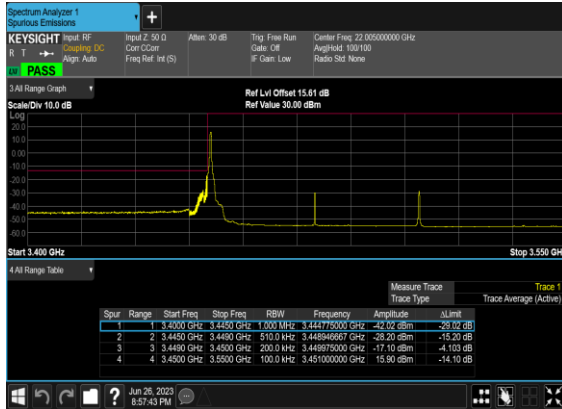


N78(60M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

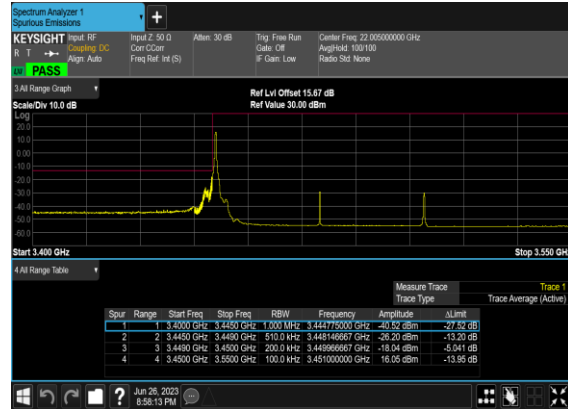

N78(60M)_DFT-s-OFDM_BPSK_Outer_Full_Low_CH

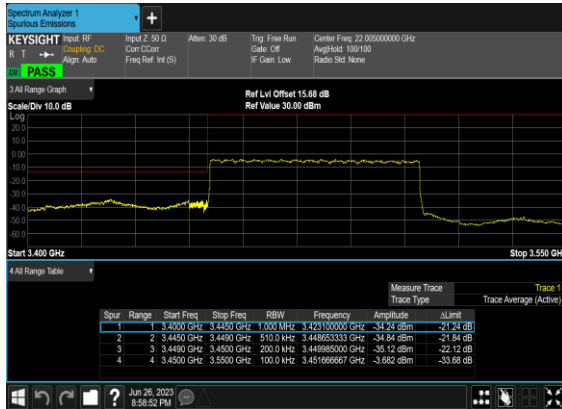

N78(60M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH

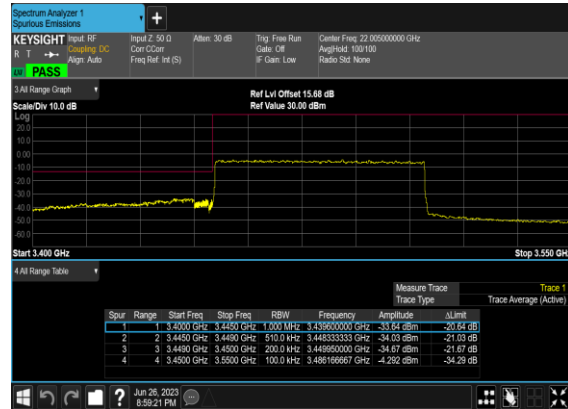


N78(60M)_DFT-s-OFDM_BPSK_Edge_1RB_Right_High_CH




N78(60M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_High_CH




N78(60M)_DFT-s-OFDM_BPSK_Outer_Full_High_CH

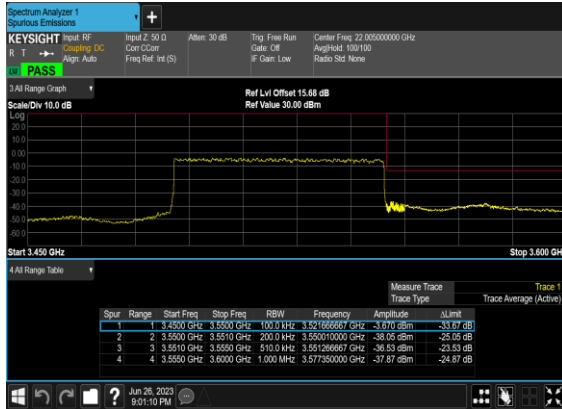


N78(60M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH

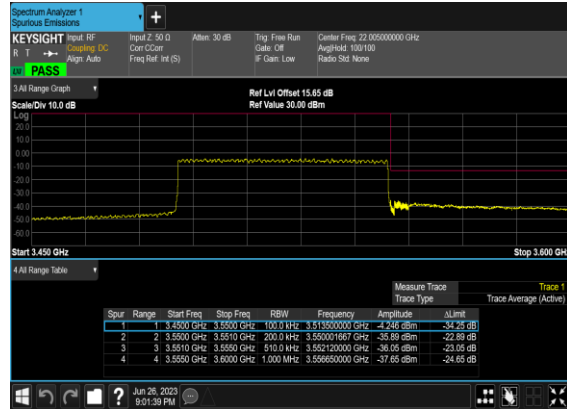


N78(100M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

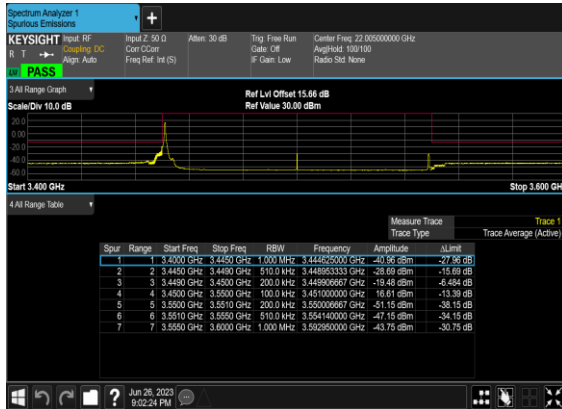


N78(100M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

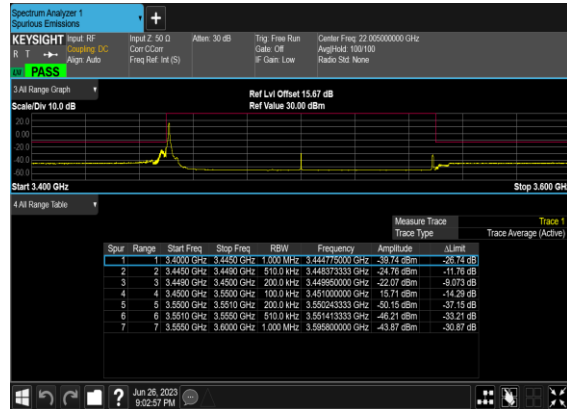


N78(100M)_DFT-s-OFDM_BPSK_Edge_1RB_Right_Mid_CH

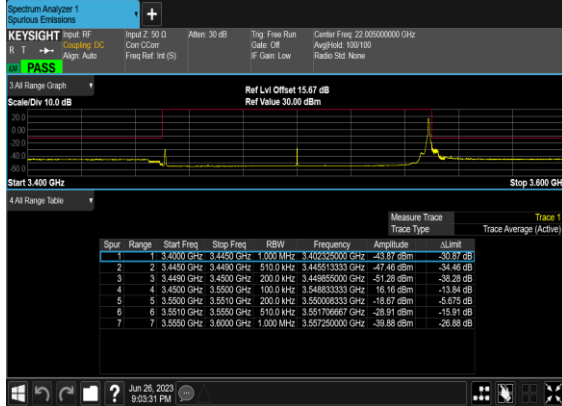


N78(100M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_Mid_CH

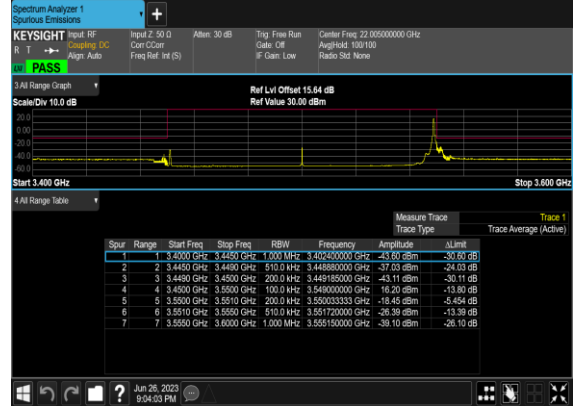

N78(100M)_DFT-s-OFDM_BPSK_Outer_Full_Mid_CH

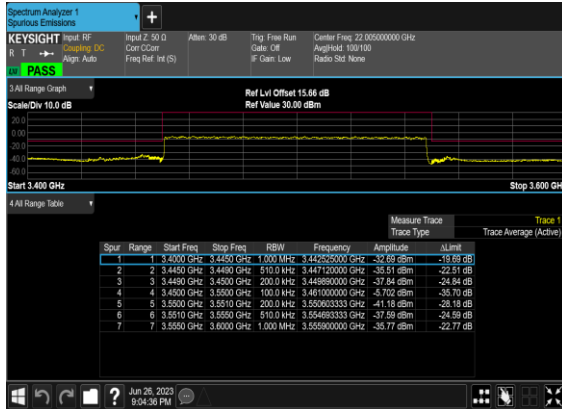

N78(100M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

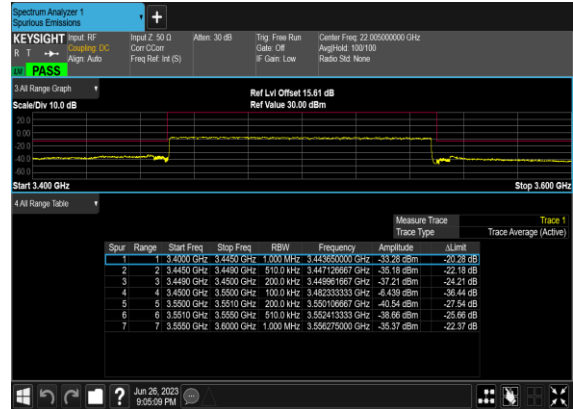

Appendix B. Test Results of Radiated Test

Radiated Spurious Emission

Test Engineer :	Zhaohui Liang	Temperature :	22~25°C
		Relative Humidity :	48~52%

RSE pre-scanned harmonic for different antennas, choose the worst antenna perform final test and record in the report.

SA n78 / NR 100MHz / QPSK / ANT5									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	6901.50	-53.20	-13	-40.20	-60.66	-56.50	8.30	11.60	H
	10352.25	-55.48	-13	-42.48	-67.50	-57.00	10.48	12.00	H
	13803.00	-53.85	-13	-40.85	-69.70	-55.55	11.80	13.50	H
	6901.50	-51.41	-13	-38.41	-60.15	-54.71	8.30	11.60	V
	10352.25	-54.30	-13	-41.30	-68.12	-55.82	10.48	12.00	V
	13803.00	-54.81	-13	-41.81	-69.47	-56.51	11.80	13.50	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

EN-DC_7A_n78A / LTE 10MHz + NR 100MHz / QPSK / ANT1 (LTE) & ANT5(NR)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
NR n78 Middle	6901.50	-59.97	-13	-46.97	-65.35	-63.27	8.30	11.60	H
	10352.25	-58.77	-13	-45.77	-69.85	-60.29	10.48	12.00	H
	13803.00	-54.94	-13	-41.94	-70.07	-56.64	11.80	13.50	H
	6901.50	-58.85	-13	-45.85	-65.51	-62.15	8.30	11.60	V
	10352.25	-56.73	-13	-43.73	-69.61	-58.25	10.48	12.00	V
	13803.00	-55.98	-13	-42.98	-69.92	-57.68	11.80	13.50	V
LTE Band7 Middle	5061.18	-54.27	-25	-29.27	-78.34	-59.83	7.14	12.70	H
	7591.77	-59.01	-25	-34.01	-65.54	-62.31	8.30	11.60	H
	10122.36	-57.82	-25	-32.82	-68.73	-59.34	10.48	12.00	H
	5061.18	-55.96	-25	-30.96	-81.24	-61.52	7.14	12.70	V
	7591.77	-57.52	-25	-32.52	-64.05	-60.82	8.30	11.60	V
	10122.36	-56.93	-25	-31.93	-68.89	-58.45	10.48	12.00	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.