



Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 12	U-NII-1	5.15-5.25	6	802.11ac VHT20	48	5240	MCS0	-	-
Mode 13	U-NII-2A	5.25-5.35	6	802.11ac VHT20	52	5260	MCS0	-	-
Mode 14	U-NII-2A	5.25-5.35	6	802.11ac VHT20	60	5300	MCS0	-	-
Mode 15	U-NII-2A	5.25-5.35	6	802.11ac VHT20	64	5320	MCS0	-	-
Mode 16	U-NII-2C	5.47-5.725	6	802.11ac VHT20	100	5500	MCS0	-	-
Mode 17	U-NII-2C	5.47-5.725	6	802.11ac VHT20	116	5580	MCS0	-	-
Mode 18	U-NII-2C	5.47-5.725	6	802.11ac VHT20	140	5700	MCS0	-	-
Mode 19	U-NII-1	5.15-5.25	6	802.11ac VHT40	38	5190	MCS0	-	-
Mode 20	U-NII-1	5.15-5.25	6	802.11ac VHT40	46	5230	MCS0	-	-
Mode 21	U-NII-2A	5.25-5.35	6	802.11ac VHT40	54	5270	MCS0	-	-
Mode 22	U-NII-2A	5.25-5.35	6	802.11ac VHT40	62	5310	MCS0	-	-



Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 23	U-NII-2C	5.47-5.725	6	802.11ac VHT40	102	5510	MCS0	-	-
Mode 24	U-NII-2C	5.47-5.725	6	802.11ac VHT40	134	5670	MCS0	-	-
Mode 25	U-NII-1	5.15-5.25	6	802.11ac VHT80	42	5210	MCS0	-	-
Mode 26	U-NII-2A	5.25-5.35	6	802.11ac VHT80	58	5290	MCS0	-	-
Mode 27	U-NII-2C	5.47-5.725	6	802.11ac VHT80	106	5530	MCS0	-	-
Mode 28	U-NII-2C	5.47-5.725	6	802.11ac VHT80	122	5610	MCS0	-	-
Mode 29	U-NII-3	5.725-5.85	6	802.11a	149	5745	6Mbps	-	-
Mode 30	U-NII-3	5.725-5.85	6	802.11a	157	5785	6Mbps	-	-
Mode 31	U-NII-3	5.725-5.85	6	802.11a	165	5825	6Mbps	-	-
Mode 32	U-NII-3	5.725-5.85	6	802.11ac VHT20	149	5745	MCS0	-	-
Mode 33	U-NII-3	5.725-5.85	6	802.11ac VHT20	157	5785	MCS0	-	-



Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 34	U-NII-3	5.725-5.85	6	802.11ac VHT20	165	5825	MCS0	-	-
Mode 35	U-NII-3	5.725-5.85	6	802.11ac VHT40	151	5755	MCS0	-	-
Mode 36	U-NII-3	5.725-5.85	6	802.11ac VHT40	159	5795	MCS0	-	-
Mode 37	U-NII-3	5.725-5.85	6	802.11ac VHT80	155	5775	MCS0	-	-
Mode 42	U-NII-2C	5.47-5.725	6	802.11ac VHT80	106	5530	MCS0	-	LF
Mode 43	U-NII-3	5.725-5.85	6	802.11ac VHT40	151	5755	MCS0	-	LF



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11a	36	-	-	-	-	-	-	-	Band Edge
	802.11a	36	10360.00	47.75	68.30	-20.55	V	Peak	Pass	Harmonic
2	802.11a	44	-	-	-	-	-	-	-	Band Edge
	802.11a	44	10440.00	47.84	68.30	-20.46	V	Peak	Pass	Harmonic
3	802.11a	48	-	-	-	-	-	-	-	Band Edge
	802.11a	48	10480.00	47.50	68.30	-20.80	V	Peak	Pass	Harmonic
4	802.11a	52	-	-	-	-	-	-	-	Band Edge
	802.11a	52	10520.00	47.77	68.30	-20.53	V	Peak	Pass	Harmonic
5	802.11a	60	-	-	-	-	-	-	-	Band Edge
	802.11a	60	15900.00	49.63	74.00	-24.37	V	Peak	Pass	Harmonic
6	802.11a	64	-	-	-	-	-	-	-	Band Edge



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
6	802.11a	64	15960.00	49.51	74.00	-24.49	V	Peak	Pass	Harmonic
7	802.11a	100	-	-	-	-	-	-	-	Band Edge
	802.11a	100	16500.00	50.08	68.30	-18.22	H	Peak	Pass	Harmonic
8	802.11a	116	-	-	-	-	-	-	-	Band Edge
	802.11a	116	16740.00	50.16	68.30	-18.14	V	Peak	Pass	Harmonic
9	802.11a	140	-	-	-	-	-	-	-	Band Edge
	802.11a	140	17100.00	49.14	68.30	-19.16	V	Peak	Pass	Harmonic
10	802.11ac VHT20	36	5149.94	46.12	54.00	-7.88	H	AVERAGE	Pass	Band Edge
	802.11ac VHT20	36	10360.00	47.76	68.30	-20.54	H	Peak	Pass	Harmonic
11	802.11ac VHT20	44	-	-	-	-	-	-	-	Band Edge
	802.11ac VHT20	44	10440.00	47.99	68.30	-20.31	V	Peak	Pass	Harmonic



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
12	802.11ac VHT20	48	-	-	-	-	-	-	-	Band Edge
	802.11ac VHT20	48	10480.00	48.18	68.30	-20.12	H	Peak	Pass	Harmonic
13	802.11ac VHT20	52	-	-	-	-	-	-	-	Band Edge
	802.11ac VHT20	52	10520.00	47.60	68.30	-20.70	H	Peak	Pass	Harmonic
14	802.11ac VHT20	60	-	-	-	-	-	-	-	Band Edge
	802.11ac VHT20	60	15900.00	48.93	74.00	-25.07	V	Peak	Pass	Harmonic
15	802.11ac VHT20	64	5350.38	46.15	54.00	-7.85	H	AVERAGE	Pass	Band Edge
	802.11ac VHT20	64	15960.00	50.80	74.00	-23.20	V	Peak	Pass	Harmonic
16	802.11ac VHT20	100	5468.95	62.20	68.30	-6.10	H	PEAK	Pass	Band Edge
	802.11ac VHT20	100	16500.00	50.07	68.30	-18.23	H	Peak	Pass	Harmonic
17	802.11ac VHT20	116	-	-	-	-	-	-	-	Band Edge



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
17	802.11ac VHT20	116	16740.00	50.21	68.30	-18.09	H	Peak	Pass	Harmonic
18	802.11ac VHT20	140	5733.28	61.23	68.30	-7.07	H	PEAK	Pass	Band Edge
	802.11ac VHT20	140	17100.00	50.65	68.30	-17.65	H	Peak	Pass	Harmonic
19	802.11ac VHT40	38	5148.96	46.36	54.00	-7.64	H	AVERAGE	Pass	Band Edge
	802.11ac VHT40	38	-	-	-	-	-	-	-	Harmonic
20	802.11ac VHT40	46	5100.28	44.37	54.00	-9.63	H	AVERAGE	Pass	Band Edge
	802.11ac VHT40	46	-	-	-	-	-	-	-	Harmonic
21	802.11ac VHT40	54	5045.09	44.26	54.00	-9.74	V	AVERAGE	Pass	Band Edge
	802.11ac VHT40	54	-	-	-	-	-	-	-	Harmonic
22	802.11ac VHT40	62	5352.75	45.70	54.00	-8.30	H	AVERAGE	Pass	Band Edge
	802.11ac VHT40	62	-	-	-	-	-	-	-	Harmonic



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
23	802.11ac VHT40	102	5459.92	45.99	54.00	-8.01	H	AVERAGE	Pass	Band Edge
	802.11ac VHT40	102	-	-	-	-	-	-	-	Harmonic
24	802.11ac VHT40	134	5457.52	43.40	54.00	-10.60	V	AVERAGE	Pass	Band Edge
	802.11ac VHT40	134	-	-	-	-	-	-	-	Harmonic
25	802.11ac VHT80	42	5112.35	49.37	54.00	-4.63	H	AVERAGE	Pass	Band Edge
	802.11ac VHT80	42	-	-	-	-	-	-	-	Harmonic
26	802.11ac VHT80	58	5363.78	50.76	54.00	-3.24	H	AVERAGE	Pass	Band Edge
	802.11ac VHT80	58	-	-	-	-	-	-	-	Harmonic
27	802.11ac VHT80	106	5432.80	50.90	54.00	-3.10	H	AVERAGE	Pass	Band Edge
	802.11ac VHT80	106	16590.00	50.97	68.30	-17.33	V	Peak	Pass	Harmonic
28	802.11ac VHT80	122	5452.44	45.10	54.00	-8.90	H	AVERAGE	Pass	Band Edge



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
28	802.11ac VHT80	122	-	-	-	-	-	-	-	Harmonic
29	802.11a	149	-	-	-	-	-	-	-	Band Edge
	802.11a	149	17235.00	50.10	68.30	-18.20	V	Peak	Pass	Harmonic
30	802.11a	157	-	-	-	-	-	-	-	Band Edge
	802.11a	157	17355.00	50.72	68.30	-17.58	V	Peak	Pass	Harmonic
31	802.11a	165	-	-	-	-	-	-	-	Band Edge
	802.11a	165	17475.00	50.95	68.30	-17.35	V	Peak	Pass	Harmonic
32	802.11ac VHT20	149	5647.56	54.91	68.30	-13.39	H	PEAK	Pass	Band Edge
	802.11ac VHT20	149	17235.00	50.29	68.30	-18.01	V	Peak	Pass	Harmonic
33	802.11ac VHT20	157	-	-	-	-	-	-	-	Band Edge
	802.11ac VHT20	157	17355.00	50.39	68.30	-17.91	V	Peak	Pass	Harmonic



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
34	802.11ac VHT20	165	5928.88	55.09	68.30	-13.21	V	PEAK	Pass	Band Edge
	802.11ac VHT20	165	17475.00	50.89	68.30	-17.41	H	Peak	Pass	Harmonic
35	802.11ac VHT40	151	5928.55	55.43	68.30	-12.87	V	PEAK	Pass	Band Edge
	802.11ac VHT40	151	17265.00	50.03	68.30	-18.27	H	Peak	Pass	Harmonic
36	802.11ac VHT40	159	5928.15	54.61	68.30	-13.69	V	PEAK	Pass	Band Edge
	802.11ac VHT40	159	-	-	-	-	-	-	-	Harmonic
37	802.11ac VHT80	155	5637.28	54.78	68.30	-13.52	V	PEAK	Pass	Band Edge
	802.11ac VHT80	155	-	-	-	-	-	-	-	Harmonic
42	802.11ac VHT80	106	53.28	27.75	40	-12.25	V	PEAK	Pass	LF
43	802.11ac VHT40	151	30	25.84	40	-14.16	V	PEAK	Pass	LF



Co-location

UNII 2C - 5470-5725MHzMHz

WIFI 802. 11ac_VHT20_Ch106+LTE Band 13 Link (Band Edge @ 3m)

WIFI Ant. 6	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
WIFI 802. 11ac_VHT20_Ch106+LTE Band 13 Link		5455.12	57.35	-16.65	74	43.05	34.66	9.88	30.24	100	80	P	H
		5465.92	54.38	-13.92	68.3	40.02	34.67	9.92	30.23	100	80	P	H
		5432.32	50.55	-3.45	54	36.27	34.65	9.88	30.25	100	80	A	H
	*	5530	96.41	-	-	81.93	34.73	9.97	30.22	100	80	P	H
	*	5530	89.26	-	-	74.78	34.73	9.97	30.22	100	80	A	H
		5755.865	52.72	-15.58	68.3	37.82	35.11	10.14	30.35	100	80	P	H
		5452.96	52.91	-21.09	74	38.61	34.66	9.88	30.24	100	122	P	V
		5464.72	52.21	-16.09	68.3	37.89	34.67	9.88	30.23	100	122	P	V
		5432.56	46.66	-7.34	54	32.38	34.65	9.88	30.25	100	122	A	V
	*	5530	92.11	-	-	77.63	34.73	9.97	30.22	100	122	P	V
	*	5530	84.99	-	-	70.51	34.73	9.97	30.22	100	122	A	V
		5731.295	53.81	-14.49	68.3	38.97	35.06	10.12	30.34	100	122	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

UNII 2C - 5470-5725MHzMHz

WIFI 802. 11ac_VHT80_Ch106+LTE Band 13 Link (Harmonic @ 3m)

WIFI Ant. 6	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
WIFI 802. 11ac_VHT80_Ch106+LTE Band 13 Link		11060	48.32	-25.68	74	55.5	38.17	13.75	59.1	-	-	P	H
		16590	50.39	-17.91	68.3	52.86	41	16.21	59.68	-	-	P	H
		11060	48.14	-25.86	74	55.32	38.17	13.75	59.1	-	-	P	V
		16590	50.21	-18.09	68.3	52.68	41	16.21	59.68	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Straddle Channel
UNII-2C - Straddle Channel
WIFI 802.11a (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant. 6		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	Factor (dB/m)	Loss (dB)	Factor (dB)	Pos (cm)	Pos (deg)	Avg. (P/A)	(H/V)
802.11a CH 144 5720MHz		11440	48.86	-25.14	74	54.56	38.53	13.71	57.94	-	-	P	H
		17160	50.93	-17.37	68.3	49.88	41.27	16.55	56.77	-	-	P	H
		11440	49.35	-24.65	74	55.05	38.53	13.71	57.94	-	-	P	V
		17160	50.71	-17.59	68.3	49.66	41.27	16.55	56.77	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

UNII-2C - Straddle Channel
WIFI 802.11ac VHT20 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant. 6		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	Factor (dB/m)	Loss (dB)	Factor (dB)	Pos (cm)	Pos (deg)	Avg. (P/A)	(H/V)
WIFI 802.11ac VHT20CH 144 5720MHz		5424.25	50.11	-23.89	74	36.14	34.63	9.84	30.5	100	65	P	H
		5462.75	50.05	-18.25	68.3	36	34.67	9.88	30.5	100	65	P	H
	*	5720	101.33	-	-	86.74	35.06	10.12	30.59	100	65	P	H
		5880.75	52.34	-15.96	68.3	37.47	35.31	10.21	30.65	100	65	P	H
		5452.85	42.13	-11.87	54	28.09	34.66	9.88	30.5	100	65	A	H
		5720	94.17	-	-	79.58	35.06	10.12	30.59	100	65	A	H
		5420.95	49.94	-24.06	74	35.97	34.63	9.84	30.5	100	326	P	V
		5465.5	49.93	-18.37	68.3	35.88	34.67	9.88	30.5	100	326	P	V
	*	5720	95.64	-	-	81.05	35.06	10.12	30.59	100	326	P	V
		5900	51.66	-16.64	68.3	36.75	35.33	10.24	30.66	100	326	P	V
		5460	42.11	-11.89	54	28.07	34.66	9.88	30.5	100	326	A	V
		5720	89.25	-	-	74.66	35.06	10.12	30.59	100	326	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII-2C - Straddle Channel
WIFI 802.11ac VHT20 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant. 6		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	Factor (dB/m)	Loss (dB)	Factor (dB)	Pos (cm)	Pos (deg)	Avg. (P/A)	(H/V)
WIFI 802.11ac VHT20 CH 144 5720MHz		11440	48.64	-25.36	74	54.34	38.53	13.71	57.94	-	-	P	H
		17160	50.7	-17.6	68.3	49.65	41.27	16.55	56.77	-	-	P	H
		11440	49.27	-24.73	74	54.97	38.53	13.71	57.94	-	-	P	V
		17160	50.1	-18.2	68.3	49.05	41.27	16.55	56.77	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

UNII-2C - Straddle Channel
WIFI 802.11ac VHT 40 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant. 6		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	Factor (dB/m)	Loss (dB)	Factor (dB)	Pos (cm)	Pos (deg)	Avg. (P/A)	(H/V)
WIFI 802.11ac VHT 40 CH 142 5710MHz		5446.8	51.49	-22.51	74	37.45	34.66	9.88	30.5	100	81	P	H
		5468.25	50.18	-18.12	68.3	36.09	34.67	9.92	30.5	100	81	P	H
	*	5710	97.21	-	-	82.64	35.03	10.12	30.58	100	81	P	H
		5889	52.02	-16.28	68.3	37.13	35.33	10.21	30.65	100	81	P	H
		5449	42.56	-11.44	54	28.52	34.66	9.88	30.5	100	81	A	H
		5710	90.15	-	-	75.58	35.03	10.12	30.58	100	81	A	H
		5446.8	50.58	-23.42	74	36.54	34.66	9.88	30.5	100	348	P	V
		5469.9	50.08	-18.22	68.3	35.99	34.67	9.92	30.5	100	348	P	V
	*	5710	90.96	-	-	76.39	35.03	10.12	30.58	100	348	P	V
		5890.1	52.06	-16.24	68.3	37.17	35.33	10.21	30.65	100	348	P	V
		5456.7	42.85	-11.15	54	28.81	34.66	9.88	30.5	100	348	A	V
		5710	84.56	-	-	69.99	35.03	10.12	30.58	100	348	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII-2C - Straddle Channel
WIFI 802.11ac VHT 80 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant., Note, Frequency, Level, Margin, Limit, Read, Antenna, Path, Preamp, Ant, Table, Peak, Pol. It contains test results for various frequencies and includes a Remark section at the bottom.



Mode	1																																																																																																								
	Harmonic																																																																																																								
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																								
ANT	6																																																																																																								
Pol.	Horizontal	Vertical																																																																																																							
Peak Avg	<p style="text-align: right;">Date: 2023-06-16</p>	<p style="text-align: right;">Date: 2023-06-16</p>																																																																																																							
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>47.19</td> <td>68.30</td> <td>-21.11</td> <td>56.43</td> <td>37.62</td> <td>13.48</td> <td>60.34</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>50.03</td> <td>74.00</td> <td>-23.97</td> <td>52.51</td> <td>40.56</td> <td>15.54</td> <td>58.58</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Apos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	47.19	68.30	-21.11	56.43	37.62	13.48	60.34	---	---	Peak	2	15540.00	50.03	74.00	-23.97	52.51	40.56	15.54	58.58	---	---	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>47.75</td> <td>68.30</td> <td>-20.55</td> <td>56.99</td> <td>37.62</td> <td>13.48</td> <td>60.34</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>50.79</td> <td>74.00</td> <td>-23.21</td> <td>53.27</td> <td>40.56</td> <td>15.54</td> <td>58.58</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Apos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	47.75	68.30	-20.55	56.99	37.62	13.48	60.34	---	---	Peak	2	15540.00	50.79	74.00	-23.21	53.27	40.56	15.54	58.58	---	---
	Limit	Read	Ant	Cable	Preamp	Apos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	10360.00	47.19	68.30	-21.11	56.43	37.62	13.48	60.34	---	---	Peak																																																																																														
2	15540.00	50.03	74.00	-23.97	52.51	40.56	15.54	58.58	---	---	Peak																																																																																														
	Limit	Read	Ant	Cable	Preamp	Apos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	10360.00	47.75	68.30	-20.55	56.99	37.62	13.48	60.34	---	---	Peak																																																																																														
2	15540.00	50.79	74.00	-23.21	53.27	40.56	15.54	58.58	---	---	Peak																																																																																														



Mode	2																																																																																																								
	Harmonic																																																																																																								
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																																								
ANT	6																																																																																																								
Pol.	Horizontal	Vertical																																																																																																							
Peak Avg																																																																																																									
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>46.93</td> <td>68.30</td> <td>-21.37</td> <td>56.14</td> <td>37.66</td> <td>13.51</td> <td>60.38</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>50.38</td> <td>74.00</td> <td>-23.62</td> <td>53.04</td> <td>40.60</td> <td>15.56</td> <td>58.82</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	46.93	68.30	-21.37	56.14	37.66	13.51	60.38	---	---	Peak	2	15660.00	50.38	74.00	-23.62	53.04	40.60	15.56	58.82	---	---	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>47.84</td> <td>68.30</td> <td>-20.46</td> <td>57.05</td> <td>37.66</td> <td>13.51</td> <td>60.38</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>50.08</td> <td>74.00</td> <td>-23.92</td> <td>52.74</td> <td>40.60</td> <td>15.56</td> <td>58.82</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	47.84	68.30	-20.46	57.05	37.66	13.51	60.38	---	---	Peak	2	15660.00	50.08	74.00	-23.92	52.74	40.60	15.56	58.82	---	---
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	10440.00	46.93	68.30	-21.37	56.14	37.66	13.51	60.38	---	---	Peak																																																																																														
2	15660.00	50.38	74.00	-23.62	53.04	40.60	15.56	58.82	---	---	Peak																																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	10440.00	47.84	68.30	-20.46	57.05	37.66	13.51	60.38	---	---	Peak																																																																																														
2	15660.00	50.08	74.00	-23.92	52.74	40.60	15.56	58.82	---	---	Peak																																																																																														



Mode	3																																																																																														
	Harmonic																																																																																														
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																														
ANT	6																																																																																														
Pol.	Horizontal	Vertical																																																																																													
Peak Avg	<p>Date: 2023-06-16</p>	<p>Date: 2023-06-16</p>																																																																																													
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>46.91</td> <td>68.30</td> <td>-21.39</td> <td>56.08</td> <td>37.69</td> <td>13.53</td> <td>60.39</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>49.49</td> <td>74.00</td> <td>-24.51</td> <td>52.23</td> <td>40.62</td> <td>15.58</td> <td>58.94</td> <td>--- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	10480.00	46.91	68.30	-21.39	56.08	37.69	13.53	60.39	--- Peak	2	15720.00	49.49	74.00	-24.51	52.23	40.62	15.58	58.94	--- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>47.50</td> <td>68.30</td> <td>-20.80</td> <td>56.67</td> <td>37.69</td> <td>13.53</td> <td>60.39</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>50.15</td> <td>74.00</td> <td>-23.85</td> <td>52.89</td> <td>40.62</td> <td>15.58</td> <td>58.94</td> <td>--- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	10480.00	47.50	68.30	-20.80	56.67	37.69	13.53	60.39	--- Peak	2	15720.00	50.15	74.00	-23.85	52.89	40.62	15.58	58.94
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	10480.00	46.91	68.30	-21.39	56.08	37.69	13.53	60.39	--- Peak																																																																																						
2	15720.00	49.49	74.00	-24.51	52.23	40.62	15.58	58.94	--- Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	10480.00	47.50	68.30	-20.80	56.67	37.69	13.53	60.39	--- Peak																																																																																						
2	15720.00	50.15	74.00	-23.85	52.89	40.62	15.58	58.94	--- Peak																																																																																						



Mode	4																																																																																																	
	Harmonic																																																																																																	
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz																																																																																																	
ANT	6																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>46.57</td> <td>68.30</td> <td>-21.73</td> <td>55.63</td> <td>37.71</td> <td>13.55</td> <td>60.32</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>15780.00</td> <td>50.11</td> <td>74.00</td> <td>-23.89</td> <td>52.96</td> <td>40.63</td> <td>15.59</td> <td>59.07</td> <td>--- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10520.00	46.57	68.30	-21.73	55.63	37.71	13.55	60.32	--- Peak	2	15780.00	50.11	74.00	-23.89	52.96	40.63	15.59	59.07	--- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>47.77</td> <td>68.30</td> <td>-20.53</td> <td>56.83</td> <td>37.71</td> <td>13.55</td> <td>60.32</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>15780.00</td> <td>50.30</td> <td>74.00</td> <td>-23.70</td> <td>53.15</td> <td>40.63</td> <td>15.59</td> <td>59.07</td> <td>--- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10520.00	47.77	68.30	-20.53	56.83	37.71	13.55	60.32	--- Peak	2	15780.00	50.30	74.00	-23.70	53.15	40.63	15.59	59.07	--- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																									
1	10520.00	46.57	68.30	-21.73	55.63	37.71	13.55	60.32	--- Peak																																																																																									
2	15780.00	50.11	74.00	-23.89	52.96	40.63	15.59	59.07	--- Peak																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																									
1	10520.00	47.77	68.30	-20.53	56.83	37.71	13.55	60.32	--- Peak																																																																																									
2	15780.00	50.30	74.00	-23.70	53.15	40.63	15.59	59.07	--- Peak																																																																																									
Avg																																																																																																		



Mode	5																																																																																																						
	Harmonic																																																																																																						
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz																																																																																																						
ANT	6																																																																																																						
Pol.	Horizontal	Vertical																																																																																																					
Peak Avg	<p>Date: 2023-06-16</p>	<p>Date: 2023-06-17</p>																																																																																																					
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>47.38</td> <td>74.00</td> <td>-26.62</td> <td>55.98</td> <td>37.78</td> <td>13.59</td> <td>59.97</td> <td>185</td> <td>215</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>49.06</td> <td>74.00</td> <td>-24.94</td> <td>52.08</td> <td>40.67</td> <td>15.62</td> <td>59.31</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	10600.00	47.38	74.00	-26.62	55.98	37.78	13.59	59.97	185	215	Peak	2	15900.00	49.06	74.00	-24.94	52.08	40.67	15.62	59.31	---	---	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>46.46</td> <td>74.00</td> <td>-27.54</td> <td>55.06</td> <td>37.78</td> <td>13.59</td> <td>59.97</td> <td>185</td> <td>215</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>49.63</td> <td>74.00</td> <td>-24.37</td> <td>52.65</td> <td>40.67</td> <td>15.62</td> <td>59.31</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	10600.00	46.46	74.00	-27.54	55.06	37.78	13.59	59.97	185	215	Peak	2	15900.00	49.63	74.00	-24.37	52.65	40.67	15.62	59.31	---	---
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																															
1	10600.00	47.38	74.00	-26.62	55.98	37.78	13.59	59.97	185	215	Peak																																																																																												
2	15900.00	49.06	74.00	-24.94	52.08	40.67	15.62	59.31	---	---	Peak																																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																															
1	10600.00	46.46	74.00	-27.54	55.06	37.78	13.59	59.97	185	215	Peak																																																																																												
2	15900.00	49.63	74.00	-24.37	52.65	40.67	15.62	59.31	---	---	Peak																																																																																												



Mode	6																																																																																														
	Harmonic																																																																																														
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																														
ANT	6																																																																																														
Pol.	Horizontal	Vertical																																																																																													
Peak Avg																																																																																															
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>46.98</td> <td>74.00</td> <td>-27.02</td> <td>55.36</td> <td>37.81</td> <td>13.60</td> <td>59.79</td> <td>--- --- Peak</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>48.97</td> <td>74.00</td> <td>-25.03</td> <td>52.08</td> <td>40.69</td> <td>15.63</td> <td>59.43</td> <td>--- --- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	10640.00	46.98	74.00	-27.02	55.36	37.81	13.60	59.79	--- --- Peak	2	15960.00	48.97	74.00	-25.03	52.08	40.69	15.63	59.43	--- --- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>47.03</td> <td>74.00</td> <td>-26.97</td> <td>55.41</td> <td>37.81</td> <td>13.60</td> <td>59.79</td> <td>--- --- Peak</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>49.51</td> <td>74.00</td> <td>-24.49</td> <td>52.62</td> <td>40.69</td> <td>15.63</td> <td>59.43</td> <td>--- --- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	10640.00	47.03	74.00	-26.97	55.41	37.81	13.60	59.79	--- --- Peak	2	15960.00	49.51	74.00	-24.49	52.62	40.69	15.63	59.43
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	10640.00	46.98	74.00	-27.02	55.36	37.81	13.60	59.79	--- --- Peak																																																																																						
2	15960.00	48.97	74.00	-25.03	52.08	40.69	15.63	59.43	--- --- Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	10640.00	47.03	74.00	-26.97	55.41	37.81	13.60	59.79	--- --- Peak																																																																																						
2	15960.00	49.51	74.00	-24.49	52.62	40.69	15.63	59.43	--- --- Peak																																																																																						



Mode	7																																																																																																								
	Harmonic																																																																																																								
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																																								
ANT	6																																																																																																								
Pol.	Horizontal	Vertical																																																																																																							
Peak Avg	<p>Date: 2023-06-17</p>	<p>Date: 2023-06-17</p>																																																																																																							
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>48.92</td> <td>74.00</td> <td>-25.08</td> <td>55.26</td> <td>38.10</td> <td>13.76</td> <td>58.20</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16500.00</td> <td>50.08</td> <td>68.30</td> <td>-18.22</td> <td>50.54</td> <td>40.95</td> <td>16.11</td> <td>57.52</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11000.00	48.92	74.00	-25.08	55.26	38.10	13.76	58.20	---	---	Peak	2	16500.00	50.08	68.30	-18.22	50.54	40.95	16.11	57.52	---	---	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>50.18</td> <td>74.00</td> <td>-23.82</td> <td>56.52</td> <td>38.10</td> <td>13.76</td> <td>58.20</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16500.00</td> <td>49.96</td> <td>68.30</td> <td>-18.34</td> <td>50.42</td> <td>40.95</td> <td>16.11</td> <td>57.52</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11000.00	50.18	74.00	-23.82	56.52	38.10	13.76	58.20	---	---	Peak	2	16500.00	49.96	68.30	-18.34	50.42	40.95	16.11	57.52	---	---
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	11000.00	48.92	74.00	-25.08	55.26	38.10	13.76	58.20	---	---	Peak																																																																																														
2	16500.00	50.08	68.30	-18.22	50.54	40.95	16.11	57.52	---	---	Peak																																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	11000.00	50.18	74.00	-23.82	56.52	38.10	13.76	58.20	---	---	Peak																																																																																														
2	16500.00	49.96	68.30	-18.34	50.42	40.95	16.11	57.52	---	---	Peak																																																																																														



Mode	8																																																																																														
	Harmonic																																																																																														
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																																																																														
ANT	6																																																																																														
Pol.	Horizontal	Vertical																																																																																													
Peak Avg																																																																																															
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>49.22</td> <td>74.00</td> <td>-24.78</td> <td>55.32</td> <td>38.26</td> <td>13.74</td> <td>58.10</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>16740.00</td> <td>50.11</td> <td>68.30</td> <td>-18.19</td> <td>49.76</td> <td>41.07</td> <td>16.35</td> <td>57.07</td> <td>--- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	11160.00	49.22	74.00	-24.78	55.32	38.26	13.74	58.10	--- Peak	2	16740.00	50.11	68.30	-18.19	49.76	41.07	16.35	57.07	--- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>50.61</td> <td>74.00</td> <td>-23.39</td> <td>56.71</td> <td>38.26</td> <td>13.74</td> <td>58.10</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>16740.00</td> <td>50.16</td> <td>68.30</td> <td>-18.14</td> <td>49.81</td> <td>41.07</td> <td>16.35</td> <td>57.07</td> <td>--- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	11160.00	50.61	74.00	-23.39	56.71	38.26	13.74	58.10	--- Peak	2	16740.00	50.16	68.30	-18.14	49.81	41.07	16.35	57.07
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	11160.00	49.22	74.00	-24.78	55.32	38.26	13.74	58.10	--- Peak																																																																																						
2	16740.00	50.11	68.30	-18.19	49.76	41.07	16.35	57.07	--- Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	11160.00	50.61	74.00	-23.39	56.71	38.26	13.74	58.10	--- Peak																																																																																						
2	16740.00	50.16	68.30	-18.14	49.81	41.07	16.35	57.07	--- Peak																																																																																						



Mode	9																																																																																																								
	Harmonic																																																																																																								
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																																								
ANT	6																																																																																																								
Pol.	Horizontal	Vertical																																																																																																							
Peak Avg	<p style="text-align: right;">Date: 2023-06-16</p>	<p style="text-align: right;">Date: 2023-06-16</p>																																																																																																							
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>48.65</td> <td>74.00</td> <td>-25.35</td> <td>54.40</td> <td>38.50</td> <td>13.71</td> <td>57.96</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>48.45</td> <td>68.30</td> <td>-19.85</td> <td>47.35</td> <td>41.24</td> <td>16.56</td> <td>56.70</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11400.00	48.65	74.00	-25.35	54.40	38.50	13.71	57.96	---	---	Peak	2	17100.00	48.45	68.30	-19.85	47.35	41.24	16.56	56.70	---	---	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>49.89</td> <td>74.00</td> <td>-24.11</td> <td>55.64</td> <td>38.50</td> <td>13.71</td> <td>57.96</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>49.14</td> <td>68.30</td> <td>-19.16</td> <td>48.04</td> <td>41.24</td> <td>16.56</td> <td>56.70</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11400.00	49.89	74.00	-24.11	55.64	38.50	13.71	57.96	---	---	Peak	2	17100.00	49.14	68.30	-19.16	48.04	41.24	16.56	56.70	---	---
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	11400.00	48.65	74.00	-25.35	54.40	38.50	13.71	57.96	---	---	Peak																																																																																														
2	17100.00	48.45	68.30	-19.85	47.35	41.24	16.56	56.70	---	---	Peak																																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	11400.00	49.89	74.00	-24.11	55.64	38.50	13.71	57.96	---	---	Peak																																																																																														
2	17100.00	49.14	68.30	-19.16	48.04	41.24	16.56	56.70	---	---	Peak																																																																																														



Mode	10																																																																													
	Band Edge																																																																													
	U-NII-1_5.15-5.25_802.11ac VHT20_CH36_5180MHz																																																																													
ANT	6																																																																													
Pol.	Horizontal	Fundamental																																																																												
Peak	<table border="1"> <thead> <tr> <th colspan="2">Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.32</td> <td>56.72</td> <td>74.00</td> <td>-17.28</td> <td>43.05</td> <td>34.42</td> <td>9.75</td> <td>30.50</td> <td>100</td> <td>98</td> <td>PEAK</td> </tr> </tbody> </table>	Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5148.32	56.72	74.00	-17.28	43.05	34.42	9.75	30.50	100	98	PEAK	<table border="1"> <thead> <tr> <th colspan="2">Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>105.51</td> <td>-----</td> <td>-----</td> <td>91.77</td> <td>34.45</td> <td>9.79</td> <td>30.50</td> <td>100</td> <td>98</td> <td>PEAK</td> </tr> </tbody> </table>	Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	105.51	-----	-----	91.77	34.45	9.79	30.50	100	98	PEAK
	Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																						
1	5148.32	56.72	74.00	-17.28	43.05	34.42	9.75	30.50	100	98	PEAK																																																																			
Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																						
1	5180.00	105.51	-----	-----	91.77	34.45	9.79	30.50	100	98	PEAK																																																																			
Avg	<table border="1"> <thead> <tr> <th colspan="2">Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.94</td> <td>46.12</td> <td>54.00</td> <td>-7.88</td> <td>32.44</td> <td>34.42</td> <td>9.76</td> <td>30.50</td> <td>100</td> <td>98</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.94	46.12	54.00	-7.88	32.44	34.42	9.76	30.50	100	98	AVERAGE	<table border="1"> <thead> <tr> <th colspan="2">Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>97.27</td> <td>-----</td> <td>-----</td> <td>83.53</td> <td>34.45</td> <td>9.79</td> <td>30.50</td> <td>100</td> <td>98</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	97.27	-----	-----	83.53	34.45	9.79	30.50	100	98	AVERAGE
Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																						
1	5149.94	46.12	54.00	-7.88	32.44	34.42	9.76	30.50	100	98	AVERAGE																																																																			
Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																						
1	5180.00	97.27	-----	-----	83.53	34.45	9.79	30.50	100	98	AVERAGE																																																																			



Mode	10																																																																																																	
	Band Edge																																																																																																	
	U-NII-1_5.15-5.25_802.11ac VHT20_CH36_5180MHz																																																																																																	
ANT	6																																																																																																	
Pol.	Vertical	Fundamental																																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5124.20</td> <td>55.26</td> <td>74.00</td> <td>-18.74</td> <td>41.63</td> <td>34.40</td> <td>9.73</td> <td>30.50</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>300</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>97 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5124.20	55.26	74.00	-18.74	41.63	34.40	9.73	30.50								300								97 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5180.00</td> <td>97.98</td> <td>-----</td> <td>-----</td> <td>84.24</td> <td>34.45</td> <td>9.79</td> <td>30.50</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>300</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>97 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5180.00	97.98	-----	-----	84.24	34.45	9.79	30.50								300								97 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																											
1 5124.20	55.26	74.00	-18.74	41.63	34.40	9.73	30.50																																																																																											
							300																																																																																											
							97 PEAK																																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																											
1 5180.00	97.98	-----	-----	84.24	34.45	9.79	30.50																																																																																											
							300																																																																																											
							97 PEAK																																																																																											
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5147.24</td> <td>43.50</td> <td>54.00</td> <td>-10.50</td> <td>29.83</td> <td>34.42</td> <td>9.75</td> <td>30.50</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>300</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>97 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5147.24	43.50	54.00	-10.50	29.83	34.42	9.75	30.50								300								97 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5180.00</td> <td>88.59</td> <td>-----</td> <td>-----</td> <td>74.85</td> <td>34.45</td> <td>9.79</td> <td>30.50</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>300</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>97 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5180.00	88.59	-----	-----	74.85	34.45	9.79	30.50								300								97 AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																											
1 5147.24	43.50	54.00	-10.50	29.83	34.42	9.75	30.50																																																																																											
							300																																																																																											
							97 AVERAGE																																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																											
1 5180.00	88.59	-----	-----	74.85	34.45	9.79	30.50																																																																																											
							300																																																																																											
							97 AVERAGE																																																																																											



Mode	10																																																																																																	
	Harmonic																																																																																																	
	U-NII-1_5.15-5.25_802.11ac VHT20_CH36_5180MHz																																																																																																	
ANT	6																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p>Date: 2023-06-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>47.76</td> <td>68.30</td> <td>-20.54</td> <td>57.00</td> <td>37.62</td> <td>13.48</td> <td>60.34</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>50.53</td> <td>74.00</td> <td>-23.47</td> <td>53.01</td> <td>40.56</td> <td>15.54</td> <td>58.58</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg	1	10360.00	47.76	68.30	-20.54	57.00	37.62	13.48	60.34	---	---	Peak	2	15540.00	50.53	74.00	-23.47	53.01	40.56	15.54	58.58	---	---	Peak	<p>Date: 2023-06-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>47.71</td> <td>68.30</td> <td>-20.59</td> <td>56.95</td> <td>37.62</td> <td>13.48</td> <td>60.34</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>50.40</td> <td>74.00</td> <td>-23.60</td> <td>52.88</td> <td>40.56</td> <td>15.54</td> <td>58.58</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg	1	10360.00	47.71	68.30	-20.59	56.95	37.62	13.48	60.34	---	---	Peak	2	15540.00	50.40	74.00	-23.60	52.88	40.56	15.54	58.58	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg																																																																																											
1	10360.00	47.76	68.30	-20.54	57.00	37.62	13.48	60.34	---	---	Peak																																																																																							
2	15540.00	50.53	74.00	-23.47	53.01	40.56	15.54	58.58	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg																																																																																											
1	10360.00	47.71	68.30	-20.59	56.95	37.62	13.48	60.34	---	---	Peak																																																																																							
2	15540.00	50.40	74.00	-23.60	52.88	40.56	15.54	58.58	---	---	Peak																																																																																							



Mode	11																																																																																										
	Harmonic																																																																																										
	U-NII-1_5.15-5.25_802.11ac VHT20_CH44_5220MHz																																																																																										
ANT	6																																																																																										
Pol.	Horizontal	Vertical																																																																																									
Peak Avg																																																																																											
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 10440.00</td> <td>47.51</td> <td>68.30</td> <td>-20.79</td> <td>56.72</td> <td>37.66</td> <td>13.51</td> <td>60.38</td> <td>---</td> </tr> <tr> <td>2 15660.00</td> <td>50.86</td> <td>74.00</td> <td>-23.14</td> <td>53.52</td> <td>40.60</td> <td>15.56</td> <td>58.82</td> <td>---</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 10440.00	47.51	68.30	-20.79	56.72	37.66	13.51	60.38	---	2 15660.00	50.86	74.00	-23.14	53.52	40.60	15.56	58.82	---	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 10440.00</td> <td>47.99</td> <td>68.30</td> <td>-20.31</td> <td>57.20</td> <td>37.66</td> <td>13.51</td> <td>60.38</td> <td>---</td> </tr> <tr> <td>2 15660.00</td> <td>50.73</td> <td>74.00</td> <td>-23.27</td> <td>53.39</td> <td>40.60</td> <td>15.56</td> <td>58.82</td> <td>---</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 10440.00	47.99	68.30	-20.31	57.20	37.66	13.51	60.38	---	2 15660.00	50.73	74.00	-23.27	53.39	40.60	15.56	58.82
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																			
1 10440.00	47.51	68.30	-20.79	56.72	37.66	13.51	60.38	---																																																																																			
2 15660.00	50.86	74.00	-23.14	53.52	40.60	15.56	58.82	---																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																			
1 10440.00	47.99	68.30	-20.31	57.20	37.66	13.51	60.38	---																																																																																			
2 15660.00	50.73	74.00	-23.27	53.39	40.60	15.56	58.82	---																																																																																			



Mode	12																																																																																														
	Harmonic																																																																																														
	U-NII-1_5.15-5.25_802.11ac VHT20_CH48_5240MHz																																																																																														
ANT	6																																																																																														
Pol.	Horizontal	Vertical																																																																																													
Peak Avg	<p>Date: 2023-06-17</p>	<p>Date: 2023-06-17</p>																																																																																													
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>48.18</td> <td>68.30</td> <td>-20.12</td> <td>57.35</td> <td>37.69</td> <td>13.53</td> <td>60.39</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>50.26</td> <td>74.00</td> <td>-23.74</td> <td>53.00</td> <td>40.62</td> <td>15.58</td> <td>58.94</td> <td>--- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	10480.00	48.18	68.30	-20.12	57.35	37.69	13.53	60.39	--- Peak	2	15720.00	50.26	74.00	-23.74	53.00	40.62	15.58	58.94	--- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>47.71</td> <td>68.30</td> <td>-20.59</td> <td>56.88</td> <td>37.69</td> <td>13.53</td> <td>60.39</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>50.69</td> <td>74.00</td> <td>-23.31</td> <td>53.43</td> <td>40.62</td> <td>15.58</td> <td>58.94</td> <td>--- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	10480.00	47.71	68.30	-20.59	56.88	37.69	13.53	60.39	--- Peak	2	15720.00	50.69	74.00	-23.31	53.43	40.62	15.58	58.94
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	10480.00	48.18	68.30	-20.12	57.35	37.69	13.53	60.39	--- Peak																																																																																						
2	15720.00	50.26	74.00	-23.74	53.00	40.62	15.58	58.94	--- Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	10480.00	47.71	68.30	-20.59	56.88	37.69	13.53	60.39	--- Peak																																																																																						
2	15720.00	50.69	74.00	-23.31	53.43	40.62	15.58	58.94	--- Peak																																																																																						



Mode	13																																																																																																				
	Harmonic																																																																																																				
	U-NII-2A_5.25-5.35_802.11ac_VHT20_CH52_5260MHz																																																																																																				
ANT	6																																																																																																				
Pol.	Horizontal	Vertical																																																																																																			
Peak Avg	<p>Date: 2023-06-17</p>	<p>Date: 2023-06-17</p>																																																																																																			
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10520.00</td> <td>47.60</td> <td>68.30</td> <td>-20.70</td> <td>56.66</td> <td>37.71</td> <td>13.55</td> <td>60.32</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2 15780.00</td> <td>50.79</td> <td>74.00</td> <td>-23.21</td> <td>53.64</td> <td>40.63</td> <td>15.59</td> <td>59.07</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10520.00	47.60	68.30	-20.70	56.66	37.71	13.55	60.32	---	---	Peak	2 15780.00	50.79	74.00	-23.21	53.64	40.63	15.59	59.07	---	---	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10520.00</td> <td>47.41</td> <td>68.30</td> <td>-20.89</td> <td>56.47</td> <td>37.71</td> <td>13.55</td> <td>60.32</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2 15780.00</td> <td>49.90</td> <td>74.00</td> <td>-24.10</td> <td>52.75</td> <td>40.63</td> <td>15.59</td> <td>59.07</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10520.00	47.41	68.30	-20.89	56.47	37.71	13.55	60.32	---	---	Peak	2 15780.00	49.90	74.00	-24.10	52.75	40.63	15.59	59.07	---	---
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1 10520.00	47.60	68.30	-20.70	56.66	37.71	13.55	60.32	---	---	Peak																																																																																											
2 15780.00	50.79	74.00	-23.21	53.64	40.63	15.59	59.07	---	---	Peak																																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1 10520.00	47.41	68.30	-20.89	56.47	37.71	13.55	60.32	---	---	Peak																																																																																											
2 15780.00	49.90	74.00	-24.10	52.75	40.63	15.59	59.07	---	---	Peak																																																																																											



Mode	14																																																																																																			
	Harmonic																																																																																																			
	U-NII-2A_5.25-5.35_802.11ac_VHT20_CH60_5300MHz																																																																																																			
ANT	6																																																																																																			
Pol.	Horizontal	Vertical																																																																																																		
Peak Avg	<p>Date: 2023-06-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>46.52</td> <td>74.00</td> <td>-27.48</td> <td>55.12</td> <td>37.78</td> <td>13.59</td> <td>59.97</td> <td>185</td> <td>215</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>48.56</td> <td>74.00</td> <td>-25.44</td> <td>51.58</td> <td>40.67</td> <td>15.62</td> <td>59.31</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10600.00	46.52	74.00	-27.48	55.12	37.78	13.59	59.97	185	215	Peak	2	15900.00	48.56	74.00	-25.44	51.58	40.67	15.62	59.31	---	---	Peak	<p>Date: 2023-06-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>46.74</td> <td>74.00</td> <td>-27.26</td> <td>55.34</td> <td>37.78</td> <td>13.59</td> <td>59.97</td> <td>185</td> <td>215</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>48.93</td> <td>74.00</td> <td>-25.07</td> <td>51.95</td> <td>40.67</td> <td>15.62</td> <td>59.31</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10600.00	46.74	74.00	-27.26	55.34	37.78	13.59	59.97	185	215	Peak	2	15900.00	48.93	74.00	-25.07	51.95	40.67	15.62	59.31	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																												
1	10600.00	46.52	74.00	-27.48	55.12	37.78	13.59	59.97	185	215	Peak																																																																																									
2	15900.00	48.56	74.00	-25.44	51.58	40.67	15.62	59.31	---	---	Peak																																																																																									
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																												
1	10600.00	46.74	74.00	-27.26	55.34	37.78	13.59	59.97	185	215	Peak																																																																																									
2	15900.00	48.93	74.00	-25.07	51.95	40.67	15.62	59.31	---	---	Peak																																																																																									



Mode	15																																																																											
	Band Edge																																																																											
	U-NII-2A_5.25-5.35_802.11ac_VHT20_CH64_5320MHz																																																																											
ANT	6																																																																											
Pol.	Horizontal	Fundamental																																																																										
Peak	<table border="1"> <thead> <tr> <th colspan="2">Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5359.20</td> <td>57.21</td> <td>74.00</td> <td>-16.79</td> <td>43.28</td> <td>34.59</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>72 PEAK</td> </tr> </tbody> </table>	Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5359.20	57.21	74.00	-16.79	43.28	34.59	9.84	30.50	100	72 PEAK	<table border="1"> <thead> <tr> <th colspan="2">Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>106.83</td> <td>-----</td> <td>-----</td> <td>92.95</td> <td>34.55</td> <td>9.83</td> <td>30.50</td> <td>100</td> <td>72 PEAK</td> </tr> </tbody> </table>	Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5320.00	106.83	-----	-----	92.95	34.55	9.83	30.50	100	72 PEAK
	Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5359.20	57.21	74.00	-16.79	43.28	34.59	9.84	30.50	100	72 PEAK																																																																		
Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5320.00	106.83	-----	-----	92.95	34.55	9.83	30.50	100	72 PEAK																																																																		
Avg	<table border="1"> <thead> <tr> <th colspan="2">Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.38</td> <td>46.15</td> <td>54.00</td> <td>-7.85</td> <td>32.24</td> <td>34.58</td> <td>9.83</td> <td>30.50</td> <td>100</td> <td>72 AVERAGE</td> </tr> </tbody> </table>	Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5350.38	46.15	54.00	-7.85	32.24	34.58	9.83	30.50	100	72 AVERAGE	<table border="1"> <thead> <tr> <th colspan="2">Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>98.38</td> <td>-----</td> <td>-----</td> <td>84.50</td> <td>34.55</td> <td>9.83</td> <td>30.50</td> <td>100</td> <td>72 AVERAGE</td> </tr> </tbody> </table>	Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5320.00	98.38	-----	-----	84.50	34.55	9.83	30.50	100	72 AVERAGE
Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5350.38	46.15	54.00	-7.85	32.24	34.58	9.83	30.50	100	72 AVERAGE																																																																		
Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5320.00	98.38	-----	-----	84.50	34.55	9.83	30.50	100	72 AVERAGE																																																																		



Mode	15																																																																									
	Band Edge																																																																									
	U-NII-2A_5.25-5.35_802.11ac_VHT20_CH64_5320MHz																																																																									
ANT	6																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<p>Date: 2023-06-15</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5440.40</td> <td>54.85</td> <td>74.00</td> <td>-19.15</td> <td>40.82</td> <td>34.65</td> <td>9.88</td> <td>30.50</td> <td>100</td> <td>122</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5440.40	54.85	74.00	-19.15	40.82	34.65	9.88	30.50	100	122	PEAK	<p>Date: 2023-06-15</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>99.68</td> <td>-----</td> <td>-----</td> <td>85.80</td> <td>34.55</td> <td>9.83</td> <td>30.50</td> <td>100</td> <td>122</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5320.00	99.68	-----	-----	85.80	34.55	9.83	30.50	100	122	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5440.40	54.85	74.00	-19.15	40.82	34.65	9.88	30.50	100	122	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5320.00	99.68	-----	-----	85.80	34.55	9.83	30.50	100	122	PEAK																																																															
Avg	<p>Date: 2023-06-15</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.38</td> <td>42.72</td> <td>54.00</td> <td>-11.28</td> <td>28.81</td> <td>34.58</td> <td>9.83</td> <td>30.50</td> <td>100</td> <td>122</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5350.38	42.72	54.00	-11.28	28.81	34.58	9.83	30.50	100	122	AVERAGE	<p>Date: 2023-06-15</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>91.06</td> <td>-----</td> <td>-----</td> <td>77.18</td> <td>34.55</td> <td>9.83</td> <td>30.50</td> <td>100</td> <td>122</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5320.00	91.06	-----	-----	77.18	34.55	9.83	30.50	100	122	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5350.38	42.72	54.00	-11.28	28.81	34.58	9.83	30.50	100	122	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5320.00	91.06	-----	-----	77.18	34.55	9.83	30.50	100	122	AVERAGE																																																															







Mode	15																																																																																																	
	Harmonic																																																																																																	
	U-NII-2A_5.25-5.35_802.11ac_VHT20_CH64_5320MHz																																																																																																	
ANT	6																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>48.04</td> <td>74.00</td> <td>-25.96</td> <td>56.42</td> <td>37.81</td> <td>13.60</td> <td>59.79</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>50.26</td> <td>74.00</td> <td>-23.74</td> <td>53.37</td> <td>40.69</td> <td>15.63</td> <td>59.43</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10640.00	48.04	74.00	-25.96	56.42	37.81	13.60	59.79	---	---	Peak	2	15960.00	50.26	74.00	-23.74	53.37	40.69	15.63	59.43	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>46.89</td> <td>74.00</td> <td>-27.11</td> <td>55.27</td> <td>37.81</td> <td>13.60</td> <td>59.79</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>50.80</td> <td>74.00</td> <td>-23.20</td> <td>53.91</td> <td>40.69</td> <td>15.63</td> <td>59.43</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10640.00	46.89	74.00	-27.11	55.27	37.81	13.60	59.79	---	---	Peak	2	15960.00	50.80	74.00	-23.20	53.91	40.69	15.63	59.43	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10640.00	48.04	74.00	-25.96	56.42	37.81	13.60	59.79	---	---	Peak																																																																																							
2	15960.00	50.26	74.00	-23.74	53.37	40.69	15.63	59.43	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10640.00	46.89	74.00	-27.11	55.27	37.81	13.60	59.79	---	---	Peak																																																																																							
2	15960.00	50.80	74.00	-23.20	53.91	40.69	15.63	59.43	---	---	Peak																																																																																							



Mode	16																																																																																				
	Band Edge																																																																																				
	U-NII-2C_5.47-5.725_802.11ac_VHT20_CH100_5500MHZ																																																																																				
ANT	6																																																																																				
Pol.	Horizontal	Fundamental																																																																																			
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.50</td> <td>56.24</td> <td>74.00</td> <td>-17.76</td> <td>42.18</td> <td>34.66</td> <td>9.90</td> <td>30.50</td> <td>100</td> <td>75</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5468.95</td> <td>62.20</td> <td>-6.10</td> <td>48.12</td> <td>34.67</td> <td>9.91</td> <td>30.50</td> <td>100</td> <td>75</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5459.50	56.24	74.00	-17.76	42.18	34.66	9.90	30.50	100	75	PEAK	2	5468.95	62.20	-6.10	48.12	34.67	9.91	30.50	100	75	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>108.34</td> <td>-----</td> <td>-----</td> <td>94.20</td> <td>34.70</td> <td>9.94</td> <td>30.50</td> <td>100</td> <td>75</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5500.00	108.34	-----	-----	94.20	34.70	9.94	30.50	100	75	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																														
1	5459.50	56.24	74.00	-17.76	42.18	34.66	9.90	30.50	100	75	PEAK																																																																										
2	5468.95	62.20	-6.10	48.12	34.67	9.91	30.50	100	75	PEAK																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																														
1	5500.00	108.34	-----	-----	94.20	34.70	9.94	30.50	100	75	PEAK																																																																										
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.95</td> <td>45.85</td> <td>54.00</td> <td>-8.15</td> <td>31.79</td> <td>34.66</td> <td>9.90</td> <td>30.50</td> <td>100</td> <td>75</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5459.95	45.85	54.00	-8.15	31.79	34.66	9.90	30.50	100	75	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>99.26</td> <td>-----</td> <td>-----</td> <td>85.12</td> <td>34.70</td> <td>9.94</td> <td>30.50</td> <td>100</td> <td>75</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5500.00	99.26	-----	-----	85.12	34.70	9.94	30.50	100	75	AVERAGE											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																														
1	5459.95	45.85	54.00	-8.15	31.79	34.66	9.90	30.50	100	75	AVERAGE																																																																										
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																														
1	5500.00	99.26	-----	-----	85.12	34.70	9.94	30.50	100	75	AVERAGE																																																																										

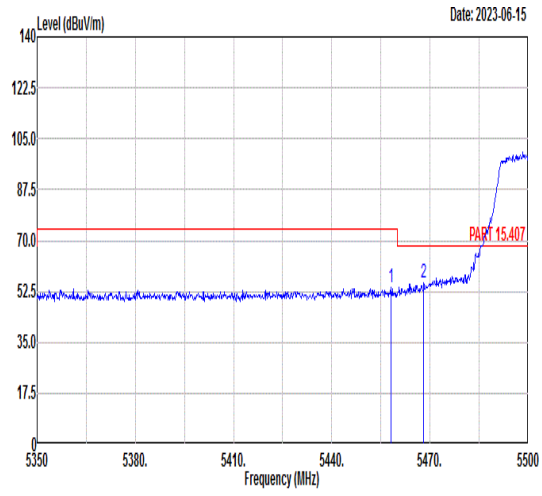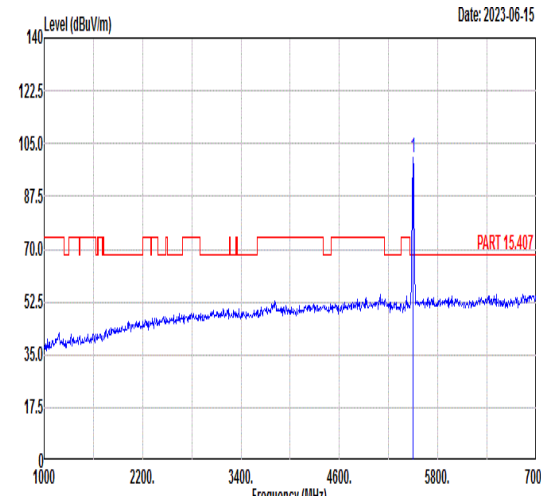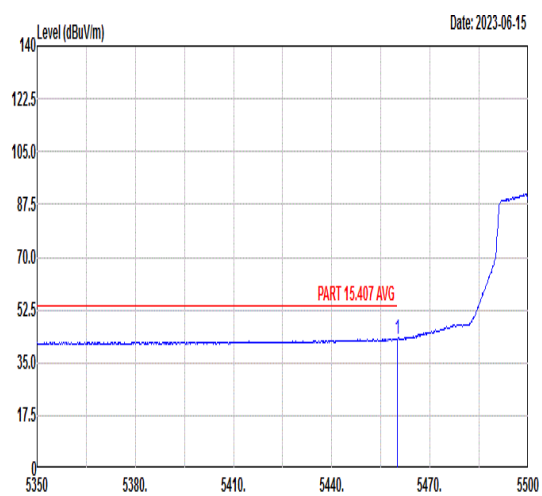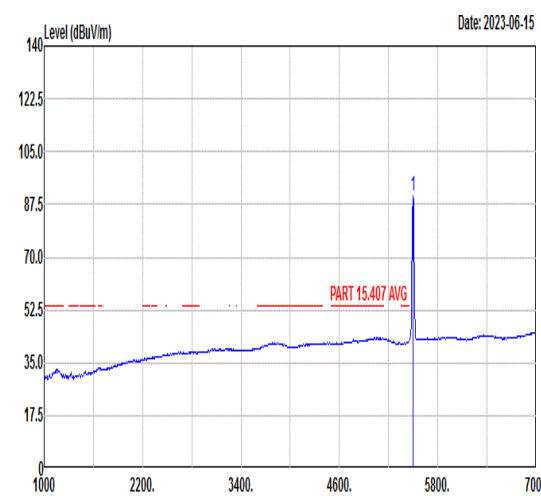

Mode	16																																																																					
	Band Edge																																																																					
	U-NII-2C_5.47-5.725_802.11ac VHT20_CH100_5500MHz																																																																					
ANT	6																																																																					
Pol.	Vertical	Fundamental																																																																				
Peak	 <p>Date: 2023-06-15</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.00</td> <td>54.07</td> <td>74.00</td> <td>-19.93</td> <td>40.02</td> <td>34.66</td> <td>9.89</td> <td>30.50</td> <td>100</td> <td>346</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5468.05</td> <td>55.38</td> <td>68.30</td> <td>-12.92</td> <td>41.30</td> <td>34.67</td> <td>9.91</td> <td>30.50</td> <td>100</td> <td>346</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg	1	5458.00	54.07	74.00	-19.93	40.02	34.66	9.89	30.50	100	346	PEAK	2	5468.05	55.38	68.30	-12.92	41.30	34.67	9.91	30.50	100	346	PEAK	 <p>Date: 2023-06-15</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>100.12</td> <td>-----</td> <td>-----</td> <td>85.98</td> <td>34.70</td> <td>9.94</td> <td>30.50</td> <td>100</td> <td>346</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg	1	5500.00	100.12	-----	-----	85.98	34.70	9.94	30.50	100	346	PEAK
	Limit	Read	Ant	Cable	Apos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg																																																														
1	5458.00	54.07	74.00	-19.93	40.02	34.66	9.89	30.50	100	346	PEAK																																																											
2	5468.05	55.38	68.30	-12.92	41.30	34.67	9.91	30.50	100	346	PEAK																																																											
Limit	Read	Ant	Cable	Apos	TPos	Remark																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg																																																														
1	5500.00	100.12	-----	-----	85.98	34.70	9.94	30.50	100	346	PEAK																																																											
Avg	 <p>Date: 2023-06-15</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.95</td> <td>42.92</td> <td>54.00</td> <td>-11.08</td> <td>28.86</td> <td>34.66</td> <td>9.90</td> <td>30.50</td> <td>100</td> <td>346</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg	1	5459.95	42.92	54.00	-11.08	28.86	34.66	9.90	30.50	100	346	AVERAGE	 <p>Date: 2023-06-15</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>90.37</td> <td>-----</td> <td>-----</td> <td>76.23</td> <td>34.70</td> <td>9.94</td> <td>30.50</td> <td>100</td> <td>346</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg	1	5500.00	90.37	-----	-----	76.23	34.70	9.94	30.50	100	346	AVERAGE												
Limit	Read	Ant	Cable	Apos	TPos	Remark																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg																																																														
1	5459.95	42.92	54.00	-11.08	28.86	34.66	9.90	30.50	100	346	AVERAGE																																																											
Limit	Read	Ant	Cable	Apos	TPos	Remark																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg																																																														
1	5500.00	90.37	-----	-----	76.23	34.70	9.94	30.50	100	346	AVERAGE																																																											






Mode	16																																																																																														
	Harmonic																																																																																														
	U-NII-2C_5.47-5.725_802.11ac_VHT20_CH100_5500MHz																																																																																														
ANT	6																																																																																														
Pol.	Horizontal	Vertical																																																																																													
Peak Avg																																																																																															
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>49.62</td> <td>74.00</td> <td>-24.38</td> <td>55.96</td> <td>38.10</td> <td>13.76</td> <td>58.20</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>16500.00</td> <td>50.07</td> <td>68.30</td> <td>-18.23</td> <td>50.53</td> <td>40.95</td> <td>16.11</td> <td>57.52</td> <td>--- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	11000.00	49.62	74.00	-24.38	55.96	38.10	13.76	58.20	--- Peak	2	16500.00	50.07	68.30	-18.23	50.53	40.95	16.11	57.52	--- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>49.39</td> <td>74.00</td> <td>-24.61</td> <td>55.73</td> <td>38.10</td> <td>13.76</td> <td>58.20</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>16500.00</td> <td>49.94</td> <td>68.30</td> <td>-18.36</td> <td>50.40</td> <td>40.95</td> <td>16.11</td> <td>57.52</td> <td>--- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	11000.00	49.39	74.00	-24.61	55.73	38.10	13.76	58.20	--- Peak	2	16500.00	49.94	68.30	-18.36	50.40	40.95	16.11	57.52
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	11000.00	49.62	74.00	-24.38	55.96	38.10	13.76	58.20	--- Peak																																																																																						
2	16500.00	50.07	68.30	-18.23	50.53	40.95	16.11	57.52	--- Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	11000.00	49.39	74.00	-24.61	55.73	38.10	13.76	58.20	--- Peak																																																																																						
2	16500.00	49.94	68.30	-18.36	50.40	40.95	16.11	57.52	--- Peak																																																																																						






Mode	17																																																																																																	
	Harmonic																																																																																																	
	U-NII-2C_5.47-5.725_802.11ac_VHT20_CH116_5580MHz																																																																																																	
ANT	6																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>49.10</td> <td>74.00</td> <td>-24.90</td> <td>55.20</td> <td>38.26</td> <td>13.74</td> <td>58.10</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16740.00</td> <td>50.21</td> <td>68.30</td> <td>-18.09</td> <td>49.86</td> <td>41.07</td> <td>16.35</td> <td>57.07</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11160.00	49.10	74.00	-24.90	55.20	38.26	13.74	58.10	---	---	Peak	2	16740.00	50.21	68.30	-18.09	49.86	41.07	16.35	57.07	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>49.15</td> <td>74.00</td> <td>-24.85</td> <td>55.25</td> <td>38.26</td> <td>13.74</td> <td>58.10</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16740.00</td> <td>50.04</td> <td>68.30</td> <td>-18.26</td> <td>49.69</td> <td>41.07</td> <td>16.35</td> <td>57.07</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11160.00	49.15	74.00	-24.85	55.25	38.26	13.74	58.10	---	---	Peak	2	16740.00	50.04	68.30	-18.26	49.69	41.07	16.35	57.07	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11160.00	49.10	74.00	-24.90	55.20	38.26	13.74	58.10	---	---	Peak																																																																																							
2	16740.00	50.21	68.30	-18.09	49.86	41.07	16.35	57.07	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11160.00	49.15	74.00	-24.85	55.25	38.26	13.74	58.10	---	---	Peak																																																																																							
2	16740.00	50.04	68.30	-18.26	49.69	41.07	16.35	57.07	---	---	Peak																																																																																							

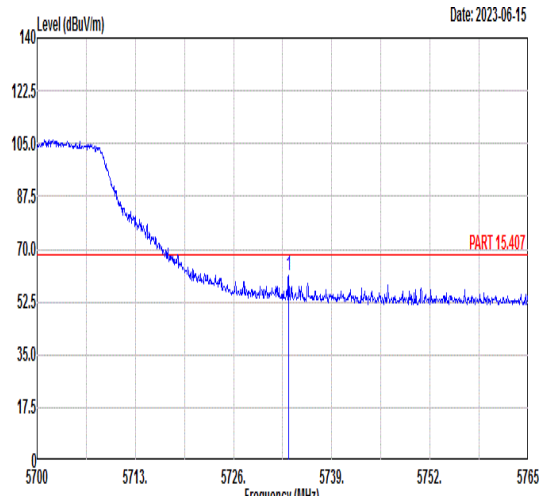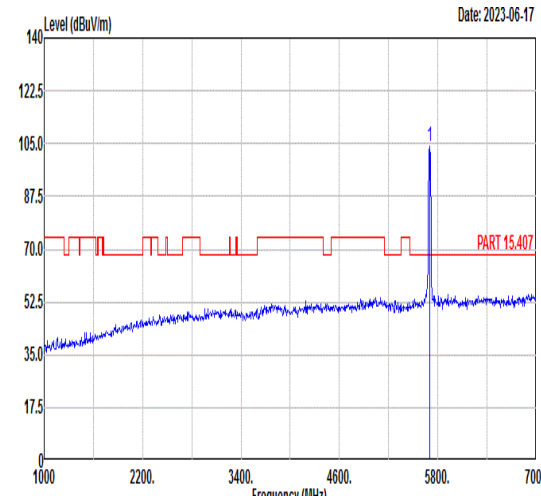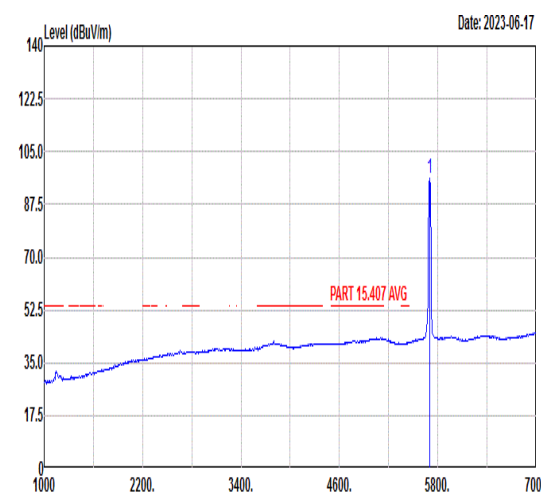

Mode	18																																																																							
	Band Edge																																																																							
	U-NII-2C_5.47-5.725_802.11ac VHT20_CH140_5700MHz																																																																							
ANT	6																																																																							
Pol.	Horizontal	Fundamental																																																																						
Peak	 <p>Date: 2023-06-15</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5733.28</td> <td>61.23</td> <td>68.30</td> <td>-7.07</td> <td>46.63</td> <td>35.07</td> <td>10.12</td> <td>30.59</td> <td>100</td> <td>65 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5733.28	61.23	68.30	-7.07	46.63	35.07	10.12	30.59	100	65 PEAK	 <p>Date: 2023-06-17</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>104.01</td> <td>-----</td> <td>-----</td> <td>89.46</td> <td>35.02</td> <td>10.11</td> <td>30.58</td> <td>100</td> <td>65 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5700.00	104.01	-----	-----	89.46	35.02	10.11	30.58	100	65 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1 5733.28	61.23	68.30	-7.07	46.63	35.07	10.12	30.59	100	65 PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1 5700.00	104.01	-----	-----	89.46	35.02	10.11	30.58	100	65 PEAK																																																															
Avg	Blank	 <p>Date: 2023-06-17</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>96.22</td> <td>-----</td> <td>-----</td> <td>81.67</td> <td>35.02</td> <td>10.11</td> <td>30.58</td> <td>100</td> <td>65 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5700.00	96.22	-----	-----	81.67	35.02	10.11	30.58	100	65 AVERAGE																																			
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1 5700.00	96.22	-----	-----	81.67	35.02	10.11	30.58	100	65 AVERAGE																																																															

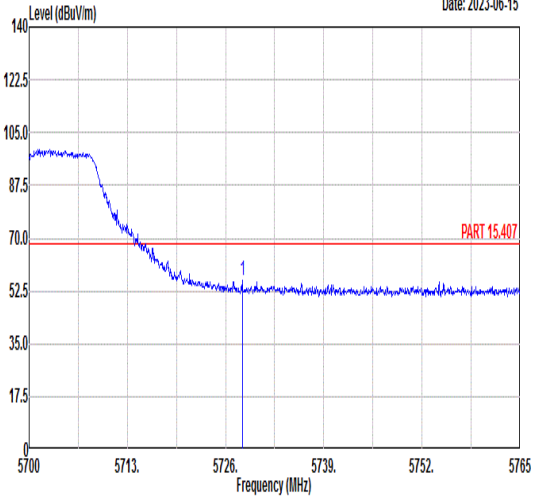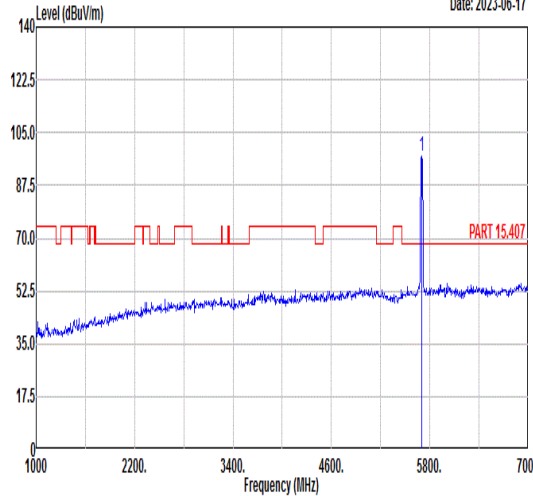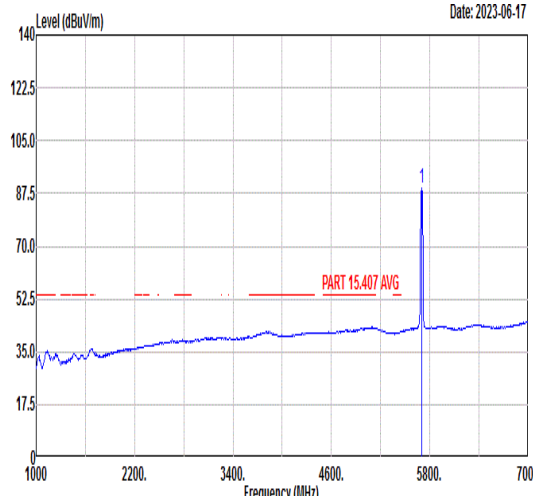

Mode	18																																																																							
	Band Edge																																																																							
	U-NII-2C_5.47-5.725_802.11ac VHT20_CH140_5700MHz																																																																							
ANT	6																																																																							
Pol.	Vertical	Fundamental																																																																						
Peak	 <p>Date: 2023-06-15</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5728.21</td> <td>56.19</td> <td>68.30</td> <td>-12.11</td> <td>41.60</td> <td>35.06</td> <td>10.12</td> <td>30.59</td> <td>300</td> <td>230 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5728.21	56.19	68.30	-12.11	41.60	35.06	10.12	30.59	300	230 PEAK	 <p>Date: 2023-06-17</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>97.34</td> <td>-----</td> <td>-----</td> <td>82.79</td> <td>35.02</td> <td>10.11</td> <td>30.58</td> <td>300</td> <td>230 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5700.00	97.34	-----	-----	82.79	35.02	10.11	30.58	300	230 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1 5728.21	56.19	68.30	-12.11	41.60	35.06	10.12	30.59	300	230 PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1 5700.00	97.34	-----	-----	82.79	35.02	10.11	30.58	300	230 PEAK																																																															
Avg	Blank	 <p>Date: 2023-06-17</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>89.18</td> <td>-----</td> <td>-----</td> <td>74.63</td> <td>35.02</td> <td>10.11</td> <td>30.58</td> <td>300</td> <td>230 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5700.00	89.18	-----	-----	74.63	35.02	10.11	30.58	300	230 AVERAGE																																			
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1 5700.00	89.18	-----	-----	74.63	35.02	10.11	30.58	300	230 AVERAGE																																																															



Mode	18																																																																																																	
	Harmonic																																																																																																	
	U-NII-2C_5.47-5.725_802.11ac_VHT20_CH140_5700MHZ																																																																																																	
ANT	6																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>48.21</td> <td>74.00</td> <td>-25.79</td> <td>53.96</td> <td>38.50</td> <td>13.71</td> <td>57.96</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>50.65</td> <td>68.30</td> <td>-17.65</td> <td>49.55</td> <td>41.24</td> <td>16.56</td> <td>56.70</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11400.00	48.21	74.00	-25.79	53.96	38.50	13.71	57.96	---	---	Peak	2	17100.00	50.65	68.30	-17.65	49.55	41.24	16.56	56.70	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>48.90</td> <td>74.00</td> <td>-25.10</td> <td>54.65</td> <td>38.50</td> <td>13.71</td> <td>57.96</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>49.99</td> <td>68.30</td> <td>-18.31</td> <td>48.89</td> <td>41.24</td> <td>16.56</td> <td>56.70</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11400.00	48.90	74.00	-25.10	54.65	38.50	13.71	57.96	---	---	Peak	2	17100.00	49.99	68.30	-18.31	48.89	41.24	16.56	56.70	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11400.00	48.21	74.00	-25.79	53.96	38.50	13.71	57.96	---	---	Peak																																																																																							
2	17100.00	50.65	68.30	-17.65	49.55	41.24	16.56	56.70	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11400.00	48.90	74.00	-25.10	54.65	38.50	13.71	57.96	---	---	Peak																																																																																							
2	17100.00	49.99	68.30	-18.31	48.89	41.24	16.56	56.70	---	---	Peak																																																																																							



Mode	19																																																																									
	Band Edge - L																																																																									
	U-NII-1_5.15-5.25_802.11ac VHT40_CH38_5190MHz																																																																									
ANT	6																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5143.07</td> <td>56.67</td> <td>74.00</td> <td>-17.33</td> <td>43.00</td> <td>34.42</td> <td>9.75</td> <td>30.50</td> <td>100</td> <td>102</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5143.07	56.67	74.00	-17.33	43.00	34.42	9.75	30.50	100	102	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>101.31</td> <td>-----</td> <td>-----</td> <td>87.56</td> <td>34.45</td> <td>9.80</td> <td>30.50</td> <td>100</td> <td>102</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5190.00	101.31	-----	-----	87.56	34.45	9.80	30.50	100	102	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5143.07	56.67	74.00	-17.33	43.00	34.42	9.75	30.50	100	102	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5190.00	101.31	-----	-----	87.56	34.45	9.80	30.50	100	102	PEAK																																																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.96</td> <td>46.36</td> <td>54.00</td> <td>-7.64</td> <td>32.68</td> <td>34.42</td> <td>9.76</td> <td>30.50</td> <td>100</td> <td>102</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5148.96	46.36	54.00	-7.64	32.68	34.42	9.76	30.50	100	102	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>92.97</td> <td>-----</td> <td>-----</td> <td>79.22</td> <td>34.45</td> <td>9.80</td> <td>30.50</td> <td>100</td> <td>102</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5190.00	92.97	-----	-----	79.22	34.45	9.80	30.50	100	102	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5148.96	46.36	54.00	-7.64	32.68	34.42	9.76	30.50	100	102	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5190.00	92.97	-----	-----	79.22	34.45	9.80	30.50	100	102	AVERAGE																																																															



	19																																						
Mode	Band Edge - R																																						
	U-NII-1_5.15-5.25_802.11ac VHT40_CH38_5190MHz																																						
ANT	6																																						
Pol.	Horizontal	Fundamental																																					
Peak	<p style="text-align: right;">Date: 2023-06-15</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5453.25</td> <td>53.28</td> <td>74.00</td> <td>-20.72</td> <td>39.23</td> <td>34.66</td> <td>9.89</td> <td>30.50</td> <td>100</td> <td>102</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5453.25	53.28	74.00	-20.72	39.23	34.66	9.89	30.50	100	102	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																															
1	5453.25	53.28	74.00	-20.72	39.23	34.66	9.89	30.50	100	102	PEAK																												
Blank																																							
Avg	<p style="text-align: right;">Date: 2023-06-15</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.38</td> <td>42.94</td> <td>54.00</td> <td>-11.06</td> <td>28.88</td> <td>34.66</td> <td>9.90</td> <td>30.50</td> <td>100</td> <td>102</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5458.38	42.94	54.00	-11.06	28.88	34.66	9.90	30.50	100	102	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																															
1	5458.38	42.94	54.00	-11.06	28.88	34.66	9.90	30.50	100	102	AVERAGE																												
Blank																																							



Mode	19																																																																																									
	Band Edge - L																																																																																									
	U-NII-1_5.15-5.25_802.11ac VHT40_CH38_5190MHz																																																																																									
ANT	6																																																																																									
Pol.	Vertical	Fundamental																																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th>cm</th> <th>deg</th> <th colspan="6"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5134.52</td> <td>54.63</td> <td>74.00</td> <td>-19.37</td> <td>40.98</td> <td>34.41</td> <td>9.74</td> <td>30.50</td> <td>300</td> <td>136</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg							1	5134.52	54.63	74.00	-19.37	40.98	34.41	9.74	30.50	300	136	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th>cm</th> <th>deg</th> <th colspan="6"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>92.67</td> <td>-----</td> <td>-----</td> <td>78.92</td> <td>34.45</td> <td>9.80</td> <td>30.50</td> <td>300</td> <td>136</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg							1	5190.00	92.67	-----	-----	78.92	34.45	9.80	30.50	300	136	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																			
cm	deg																																																																																									
1	5134.52	54.63	74.00	-19.37	40.98	34.41	9.74	30.50	300	136	PEAK																																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																			
cm	deg																																																																																									
1	5190.00	92.67	-----	-----	78.92	34.45	9.80	30.50	300	136	PEAK																																																																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th>cm</th> <th>deg</th> <th colspan="6"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5138.13</td> <td>44.07</td> <td>54.00</td> <td>-9.93</td> <td>30.42</td> <td>34.41</td> <td>9.74</td> <td>30.50</td> <td>300</td> <td>136</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg							1	5138.13	44.07	54.00	-9.93	30.42	34.41	9.74	30.50	300	136	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th>cm</th> <th>deg</th> <th colspan="6"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>82.55</td> <td>-----</td> <td>-----</td> <td>68.80</td> <td>34.45</td> <td>9.80</td> <td>30.50</td> <td>300</td> <td>136</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg							1	5190.00	82.55	-----	-----	68.80	34.45	9.80	30.50	300	136	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																			
cm	deg																																																																																									
1	5138.13	44.07	54.00	-9.93	30.42	34.41	9.74	30.50	300	136	AVERAGE																																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																			
cm	deg																																																																																									
1	5190.00	82.55	-----	-----	68.80	34.45	9.80	30.50	300	136	AVERAGE																																																																															



Mode	19																																						
	Band Edge - R																																						
	U-NII-1_5.15-5.25_802.11ac VHT40_CH38_5190MHz																																						
ANT	6																																						
Pol.	Vertical	Fundamental																																					
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5446.50</td> <td>54.66</td> <td>74.00</td> <td>-19.34</td> <td>40.63</td> <td>34.65</td> <td>9.88</td> <td>30.50</td> <td>300</td> <td>136</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5446.50	54.66	74.00	-19.34	40.63	34.65	9.88	30.50	300	136	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																															
1	5446.50	54.66	74.00	-19.34	40.63	34.65	9.88	30.50	300	136	PEAK																												
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5425.17</td> <td>43.01</td> <td>54.00</td> <td>-10.99</td> <td>29.01</td> <td>34.64</td> <td>9.86</td> <td>30.50</td> <td>300</td> <td>136</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5425.17	43.01	54.00	-10.99	29.01	34.64	9.86	30.50	300	136	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																															
1	5425.17	43.01	54.00	-10.99	29.01	34.64	9.86	30.50	300	136	AVERAGE																												



Mode	20																																																																									
	Band Edge - L																																																																									
	U-NII-1_5.15-5.25_802.11ac VHT40_CH46_5230MHz																																																																									
ANT	6																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5089.01</td> <td>55.29</td> <td>74.00</td> <td>-18.71</td> <td>41.73</td> <td>34.37</td> <td>9.69</td> <td>30.50</td> <td>100</td> <td>96</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5089.01	55.29	74.00	-18.71	41.73	34.37	9.69	30.50	100	96	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>101.69</td> <td>-----</td> <td>-----</td> <td>87.89</td> <td>34.48</td> <td>9.82</td> <td>30.50</td> <td>100</td> <td>96</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5230.00	101.69	-----	-----	87.89	34.48	9.82	30.50	100	96	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5089.01	55.29	74.00	-18.71	41.73	34.37	9.69	30.50	100	96	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5230.00	101.69	-----	-----	87.89	34.48	9.82	30.50	100	96	PEAK																																																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5100.28</td> <td>44.37</td> <td>54.00</td> <td>-9.63</td> <td>30.78</td> <td>34.38</td> <td>9.71</td> <td>30.50</td> <td>100</td> <td>96</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5100.28	44.37	54.00	-9.63	30.78	34.38	9.71	30.50	100	96	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>93.47</td> <td>-----</td> <td>-----</td> <td>79.67</td> <td>34.48</td> <td>9.82</td> <td>30.50</td> <td>100</td> <td>96</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5230.00	93.47	-----	-----	79.67	34.48	9.82	30.50	100	96	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5100.28	44.37	54.00	-9.63	30.78	34.38	9.71	30.50	100	96	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5230.00	93.47	-----	-----	79.67	34.48	9.82	30.50	100	96	AVERAGE																																																															



Mode	20																																					
	Band Edge - R																																					
	U-NII-1_5.15-5.25_802.11ac VHT40_CH46_5230MHz																																					
ANT	6																																					
Pol.	Horizontal	Fundamental																																				
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5374.44</td> <td>52.86</td> <td>74.00</td> <td>-21.14</td> <td>38.92</td> <td>34.60</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>96</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5374.44	52.86	74.00	-21.14	38.92	34.60	9.84	30.50	100	96	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5374.44	52.86	74.00	-21.14	38.92	34.60	9.84	30.50	100	96	PEAK																											
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5351.90</td> <td>42.85</td> <td>54.00</td> <td>-11.15</td> <td>28.94</td> <td>34.58</td> <td>9.83</td> <td>30.50</td> <td>100</td> <td>96</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5351.90	42.85	54.00	-11.15	28.94	34.58	9.83	30.50	100	96	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5351.90	42.85	54.00	-11.15	28.94	34.58	9.83	30.50	100	96	AVERAGE																											







Mode	20																																																																																									
	Band Edge - L																																																																																									
	U-NII-1_5.15-5.25_802.11ac VHT40_CH46_5230MHz																																																																																									
ANT	6																																																																																									
Pol.	Vertical	Fundamental																																																																																								
Peak	<p>Date: 2023-06-15</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th>cm</th> <th>deg</th> <th colspan="6"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5100.51</td> <td>54.66</td> <td>74.00</td> <td>-19.34</td> <td>41.07</td> <td>34.38</td> <td>9.71</td> <td>30.50</td> <td>300</td> <td>111</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg							1	5100.51	54.66	74.00	-19.34	41.07	34.38	9.71	30.50	300	111	PEAK	<p>Date: 2023-06-15</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th>cm</th> <th>deg</th> <th colspan="6"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>93.58</td> <td>-----</td> <td>-----</td> <td>79.78</td> <td>34.48</td> <td>9.82</td> <td>30.50</td> <td>300</td> <td>111</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg							1	5230.00	93.58	-----	-----	79.78	34.48	9.82	30.50	300	111	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																			
cm	deg																																																																																									
1	5100.51	54.66	74.00	-19.34	41.07	34.38	9.71	30.50	300	111	PEAK																																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																			
cm	deg																																																																																									
1	5230.00	93.58	-----	-----	79.78	34.48	9.82	30.50	300	111	PEAK																																																																															
Avg	<p>Date: 2023-06-15</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th>cm</th> <th>deg</th> <th colspan="6"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5015.18</td> <td>43.97</td> <td>54.00</td> <td>-10.03</td> <td>30.53</td> <td>34.32</td> <td>9.62</td> <td>30.50</td> <td>300</td> <td>111</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg							1	5015.18	43.97	54.00	-10.03	30.53	34.32	9.62	30.50	300	111	AVERAGE	<p>Date: 2023-06-15</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th>cm</th> <th>deg</th> <th colspan="6"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>85.12</td> <td>-----</td> <td>-----</td> <td>71.32</td> <td>34.48</td> <td>9.82</td> <td>30.50</td> <td>300</td> <td>111</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg							1	5230.00	85.12	-----	-----	71.32	34.48	9.82	30.50	300	111	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																			
cm	deg																																																																																									
1	5015.18	43.97	54.00	-10.03	30.53	34.32	9.62	30.50	300	111	AVERAGE																																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																			
cm	deg																																																																																									
1	5230.00	85.12	-----	-----	71.32	34.48	9.82	30.50	300	111	AVERAGE																																																																															



Mode	20																																						
	Band Edge - R																																						
	U-NII-1_5.15-5.25_802.11ac VHT40_CH46_5230MHz																																						
ANT	6																																						
Pol.	Vertical	Fundamental																																					
Peak	<p>Date: 2023-06-15</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5368.92</td> <td>53.39</td> <td>74.00</td> <td>-20.61</td> <td>39.46</td> <td>34.59</td> <td>9.84</td> <td>30.50</td> <td>300</td> <td>111</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5368.92	53.39	74.00	-20.61	39.46	34.59	9.84	30.50	300	111	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																															
1	5368.92	53.39	74.00	-20.61	39.46	34.59	9.84	30.50	300	111	PEAK																												
Avg	<p>Date: 2023-06-15</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5450.34</td> <td>43.06</td> <td>54.00</td> <td>-10.94</td> <td>29.01</td> <td>34.66</td> <td>9.89</td> <td>30.50</td> <td>300</td> <td>111</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5450.34	43.06	54.00	-10.94	29.01	34.66	9.89	30.50	300	111	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																															
1	5450.34	43.06	54.00	-10.94	29.01	34.66	9.89	30.50	300	111	AVERAGE																												

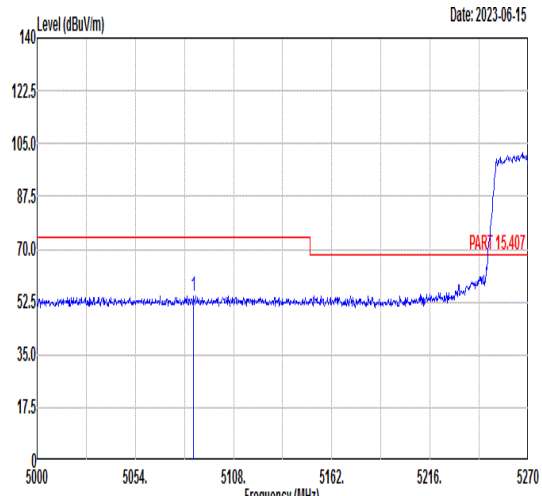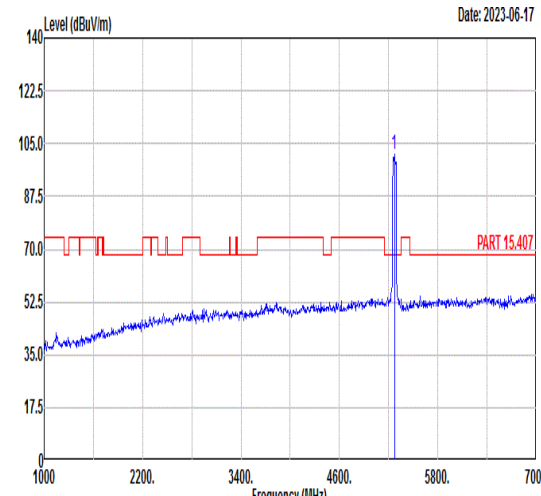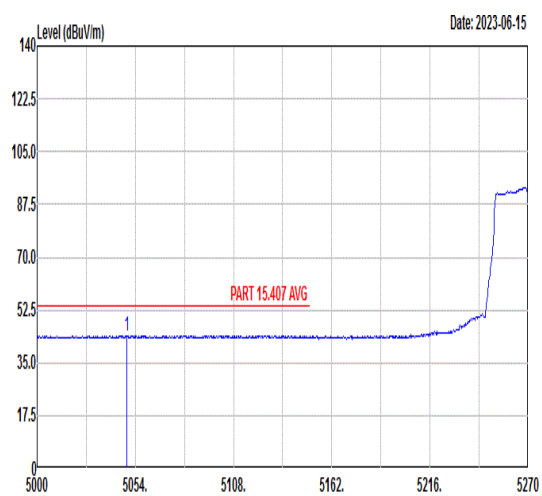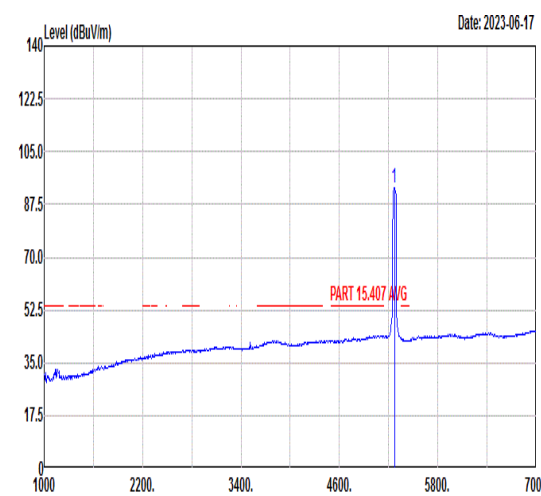

	21																																																																									
Mode	Band Edge - L																																																																									
	U-NII-2A_5.25-5.35_802.11ac_VHT40_CH54_5270MHz																																																																									
ANT	6																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	 <p>Date: 2023-06-15</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5086.13</td> <td>54.59</td> <td>74.00</td> <td>-19.41</td> <td>41.03</td> <td>34.37</td> <td>9.69</td> <td>30.50</td> <td>100</td> <td>76</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5086.13	54.59	74.00	-19.41	41.03	34.37	9.69	30.50	100	76	PEAK	 <p>Date: 2023-06-17</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>101.52</td> <td>-----</td> <td>-----</td> <td>87.67</td> <td>34.52</td> <td>9.83</td> <td>30.50</td> <td>100</td> <td>76</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5270.00	101.52	-----	-----	87.67	34.52	9.83	30.50	100	76	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5086.13	54.59	74.00	-19.41	41.03	34.37	9.69	30.50	100	76	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5270.00	101.52	-----	-----	87.67	34.52	9.83	30.50	100	76	PEAK																																																															
Avg	 <p>Date: 2023-06-15</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5049.41</td> <td>44.08</td> <td>54.00</td> <td>-9.92</td> <td>30.59</td> <td>34.34</td> <td>9.65</td> <td>30.50</td> <td>100</td> <td>76</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5049.41	44.08	54.00	-9.92	30.59	34.34	9.65	30.50	100	76	AVERAGE	 <p>Date: 2023-06-17</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>92.86</td> <td>-----</td> <td>-----</td> <td>79.01</td> <td>34.52</td> <td>9.83</td> <td>30.50</td> <td>100</td> <td>76</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5270.00	92.86	-----	-----	79.01	34.52	9.83	30.50	100	76	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5049.41	44.08	54.00	-9.92	30.59	34.34	9.65	30.50	100	76	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5270.00	92.86	-----	-----	79.01	34.52	9.83	30.50	100	76	AVERAGE																																																															



Mode	21																																				
	Band Edge - R																																				
	U-NII-2A_5.25-5.35_802.11ac_VHT40_CH54_5270MHz																																				
ANT	6																																				
Pol.	Horizontal	Fundamental																																			
Peak	<p>Date: 2023-06-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5441.38</td> <td>54.11</td> <td>74.00</td> <td>-19.89</td> <td>40.08</td> <td>34.65</td> <td>9.88</td> <td>30.50</td> <td>100</td> <td>76 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5441.38	54.11	74.00	-19.89	40.08	34.65	9.88	30.50	100	76 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																													
1 5441.38	54.11	74.00	-19.89	40.08	34.65	9.88	30.50	100	76 PEAK																												
Avg	<p>Date: 2023-06-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5359.87</td> <td>43.75</td> <td>54.00</td> <td>-10.25</td> <td>29.82</td> <td>34.59</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>76 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5359.87	43.75	54.00	-10.25	29.82	34.59	9.84	30.50	100	76 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																													
1 5359.87	43.75	54.00	-10.25	29.82	34.59	9.84	30.50	100	76 AVERAGE																												



	21																																																																									
Mode	Band Edge - L																																																																									
	U-NII-2A_5.25-5.35_802.11ac_VHT40_CH54_5270MHz																																																																									
ANT	6																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<p style="text-align: right;">Date: 2023-06-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5075.87</td> <td>54.85</td> <td>74.00</td> <td>-19.15</td> <td>41.31</td> <td>34.36</td> <td>9.68</td> <td>30.50</td> <td>200</td> <td>359</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5075.87	54.85	74.00	-19.15	41.31	34.36	9.68	30.50	200	359	PEAK	<p style="text-align: right;">Date: 2023-06-17</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>87.91</td> <td>-----</td> <td>-----</td> <td>74.06</td> <td>34.52</td> <td>9.83</td> <td>30.50</td> <td>200</td> <td>359</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5270.00	87.91	-----	-----	74.06	34.52	9.83	30.50	200	359	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5075.87	54.85	74.00	-19.15	41.31	34.36	9.68	30.50	200	359	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5270.00	87.91	-----	-----	74.06	34.52	9.83	30.50	200	359	PEAK																																																															
Avg	<p style="text-align: right;">Date: 2023-06-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5045.09</td> <td>44.26</td> <td>54.00</td> <td>-9.74</td> <td>30.77</td> <td>34.34</td> <td>9.65</td> <td>30.50</td> <td>200</td> <td>359</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5045.09	44.26	54.00	-9.74	30.77	34.34	9.65	30.50	200	359	AVERAGE	<p style="text-align: right;">Date: 2023-06-17</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>80.74</td> <td>-----</td> <td>-----</td> <td>66.89</td> <td>34.52</td> <td>9.83</td> <td>30.50</td> <td>200</td> <td>359</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5270.00	80.74	-----	-----	66.89	34.52	9.83	30.50	200	359	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5045.09	44.26	54.00	-9.74	30.77	34.34	9.65	30.50	200	359	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5270.00	80.74	-----	-----	66.89	34.52	9.83	30.50	200	359	AVERAGE																																																															



Mode	21																																				
	Band Edge - R																																				
	U-NII-2A_5.25-5.35_802.11ac_VHT40_CH54_5270MHz																																				
ANT	6																																				
Pol.	Vertical	Fundamental																																			
Peak	<p>Date: 2023-06-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5459.36</td> <td>87.5</td> <td>74.00</td> <td>-20.77</td> <td>39.18</td> <td>34.66</td> <td>9.89</td> <td>30.50</td> <td>200</td> <td>359 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5459.36	87.5	74.00	-20.77	39.18	34.66	9.89	30.50	200	359 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																													
1 5459.36	87.5	74.00	-20.77	39.18	34.66	9.89	30.50	200	359 PEAK																												
Avg	<p>Date: 2023-06-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5459.05</td> <td>70.0</td> <td>54.00</td> <td>-11.05</td> <td>28.89</td> <td>34.66</td> <td>9.90</td> <td>30.50</td> <td>200</td> <td>359 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5459.05	70.0	54.00	-11.05	28.89	34.66	9.90	30.50	200	359 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																													
1 5459.05	70.0	54.00	-11.05	28.89	34.66	9.90	30.50	200	359 AVERAGE																												



Mode	22																																																																									
	Band Edge - L																																																																									
	U-NII-2A_5.25-5.35_802.11ac_VHT40_CH62_5310MHz																																																																									
ANT	6																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5055.18</td> <td>54.62</td> <td>74.00</td> <td>-19.38</td> <td>41.11</td> <td>34.35</td> <td>9.66</td> <td>30.50</td> <td>100</td> <td>120</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5055.18	54.62	74.00	-19.38	41.11	34.35	9.66	30.50	100	120	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>102.46</td> <td>-----</td> <td>-----</td> <td>88.58</td> <td>34.55</td> <td>9.83</td> <td>30.50</td> <td>100</td> <td>120</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5310.00	102.46	-----	-----	88.58	34.55	9.83	30.50	100	120	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5055.18	54.62	74.00	-19.38	41.11	34.35	9.66	30.50	100	120	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5310.00	102.46	-----	-----	88.58	34.55	9.83	30.50	100	120	PEAK																																																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5139.50</td> <td>44.16</td> <td>54.00</td> <td>-9.84</td> <td>30.50</td> <td>34.41</td> <td>9.75</td> <td>30.50</td> <td>100</td> <td>120</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5139.50	44.16	54.00	-9.84	30.50	34.41	9.75	30.50	100	120	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>93.97</td> <td>-----</td> <td>-----</td> <td>80.09</td> <td>34.55</td> <td>9.83</td> <td>30.50</td> <td>100</td> <td>120</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5310.00	93.97	-----	-----	80.09	34.55	9.83	30.50	100	120	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5139.50	44.16	54.00	-9.84	30.50	34.41	9.75	30.50	100	120	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5310.00	93.97	-----	-----	80.09	34.55	9.83	30.50	100	120	AVERAGE																																																															



Mode	22																																				
	Band Edge - R																																				
	U-NII-2A_5.25-5.35_802.11ac VHT40_CH62_5310MHz																																				
ANT	6																																				
Pol.	Horizontal	Fundamental																																			
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5351.40</td> <td>56.16</td> <td>74.00</td> <td>-17.84</td> <td>42.25</td> <td>34.58</td> <td>9.83</td> <td>30.50</td> <td>100</td> <td>120 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5351.40	56.16	74.00	-17.84	42.25	34.58	9.83	30.50	100	120 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																													
1 5351.40	56.16	74.00	-17.84	42.25	34.58	9.83	30.50	100	120 PEAK																												
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5352.75</td> <td>45.70</td> <td>54.00</td> <td>-8.30</td> <td>31.79</td> <td>34.58</td> <td>9.83</td> <td>30.50</td> <td>100</td> <td>120 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5352.75	45.70	54.00	-8.30	31.79	34.58	9.83	30.50	100	120 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																													
1 5352.75	45.70	54.00	-8.30	31.79	34.58	9.83	30.50	100	120 AVERAGE																												



Mode	22																																																																									
	Band Edge - L																																																																									
	U-NII-2A_5.25-5.35_802.11ac_VHT40_CH62_5310MHz																																																																									
ANT	6																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<p>Date: 2023-06-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5084.94</td> <td>54.63</td> <td>74.00</td> <td>-19.37</td> <td>41.07</td> <td>34.37</td> <td>9.69</td> <td>30.50</td> <td>196</td> <td>145</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5084.94	54.63	74.00	-19.37	41.07	34.37	9.69	30.50	196	145	PEAK	<p>Date: 2023-06-17</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>90.65</td> <td>-----</td> <td>-----</td> <td>76.77</td> <td>34.55</td> <td>9.83</td> <td>30.50</td> <td>196</td> <td>145</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5310.00	90.65	-----	-----	76.77	34.55	9.83	30.50	196	145	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5084.94	54.63	74.00	-19.37	41.07	34.37	9.69	30.50	196	145	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5310.00	90.65	-----	-----	76.77	34.55	9.83	30.50	196	145	PEAK																																																															
Avg	<p>Date: 2023-06-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5053.32</td> <td>44.17</td> <td>54.00</td> <td>-9.83</td> <td>30.66</td> <td>34.35</td> <td>9.66</td> <td>30.50</td> <td>196</td> <td>145</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5053.32	44.17	54.00	-9.83	30.66	34.35	9.66	30.50	196	145	AVERAGE	<p>Date: 2023-06-17</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>83.16</td> <td>-----</td> <td>-----</td> <td>69.28</td> <td>34.55</td> <td>9.83</td> <td>30.50</td> <td>196</td> <td>145</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5310.00	83.16	-----	-----	69.28	34.55	9.83	30.50	196	145	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5053.32	44.17	54.00	-9.83	30.66	34.35	9.66	30.50	196	145	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5310.00	83.16	-----	-----	69.28	34.55	9.83	30.50	196	145	AVERAGE																																																															



	22																																					
Mode	Band Edge - R																																					
	U-NII-2A_5.25-5.35_802.11ac_VHT40_CH62_5310MHz																																					
ANT	6																																					
Pol.	Vertical	Fundamental																																				
Peak	<p style="text-align: right;">Date: 2023-06-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5455.20</td> <td>53.64</td> <td>74.00</td> <td>-20.36</td> <td>39.59</td> <td>34.66</td> <td>9.89</td> <td>30.50</td> <td>196</td> <td>145</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5455.20	53.64	74.00	-20.36	39.59	34.66	9.89	30.50	196	145	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5455.20	53.64	74.00	-20.36	39.59	34.66	9.89	30.50	196	145	PEAK																											
Blank																																						
Avg	<p style="text-align: right;">Date: 2023-06-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5452.50</td> <td>43.44</td> <td>54.00</td> <td>-10.56</td> <td>29.39</td> <td>34.66</td> <td>9.89</td> <td>30.50</td> <td>196</td> <td>145</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5452.50	43.44	54.00	-10.56	29.39	34.66	9.89	30.50	196	145	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5452.50	43.44	54.00	-10.56	29.39	34.66	9.89	30.50	196	145	AVERAGE																											
Blank																																						



	23																																																																																					
Mode	Band Edge - L																																																																																					
	U-NII-2C_5.47-5.725_802.11ac_VHT40_CH102_5510MHz																																																																																					
ANT	6																																																																																					
Pol.	Horizontal	Fundamental																																																																																				
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.60</td> <td>55.55</td> <td>74.00</td> <td>-18.45</td> <td>41.49</td> <td>34.66</td> <td>9.90</td> <td>30.50</td> <td>100</td> <td>75</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5467.76</td> <td>57.20</td> <td>68.30</td> <td>-11.10</td> <td>43.12</td> <td>34.67</td> <td>9.91</td> <td>30.50</td> <td>100</td> <td>75</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5459.60	55.55	74.00	-18.45	41.49	34.66	9.90	30.50	100	75	PEAK	2	5467.76	57.20	68.30	-11.10	43.12	34.67	9.91	30.50	100	75	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>103.30</td> <td>-----</td> <td>-----</td> <td>89.15</td> <td>34.71</td> <td>9.95</td> <td>30.51</td> <td>100</td> <td>75</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5510.00	103.30	-----	-----	89.15	34.71	9.95	30.51	100	75	PEAK
	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5459.60	55.55	74.00	-18.45	41.49	34.66	9.90	30.50	100	75	PEAK																																																																											
2	5467.76	57.20	68.30	-11.10	43.12	34.67	9.91	30.50	100	75	PEAK																																																																											
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5510.00	103.30	-----	-----	89.15	34.71	9.95	30.51	100	75	PEAK																																																																											
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.92</td> <td>45.99</td> <td>54.00</td> <td>-8.01</td> <td>31.93</td> <td>34.66</td> <td>9.90</td> <td>30.50</td> <td>100</td> <td>75</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5459.92	45.99	54.00	-8.01	31.93	34.66	9.90	30.50	100	75	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>94.48</td> <td>-----</td> <td>-----</td> <td>80.33</td> <td>34.71</td> <td>9.95</td> <td>30.51</td> <td>100</td> <td>75</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5510.00	94.48	-----	-----	80.33	34.71	9.95	30.51	100	75	AVERAGE												
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5459.92	45.99	54.00	-8.01	31.93	34.66	9.90	30.50	100	75	AVERAGE																																																																											
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5510.00	94.48	-----	-----	80.33	34.71	9.95	30.51	100	75	AVERAGE																																																																											



Mode	23																																					
	Band Edge - R																																					
	U-NII-2C_5.47-5.725_802.11ac VHT40_CH102_5510MHz																																					
ANT	6																																					
Pol.	Horizontal	Fundamental																																				
Peak	<p>Date: 2023-06-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5732.62</td> <td>54.35</td> <td>68.30</td> <td>-13.95</td> <td>39.75</td> <td>35.07</td> <td>10.12</td> <td>30.59</td> <td>100</td> <td>75</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5732.62	54.35	68.30	-13.95	39.75	35.07	10.12	30.59	100	75	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5732.62	54.35	68.30	-13.95	39.75	35.07	10.12	30.59	100	75	PEAK																											



Mode	23																																																																																					
	Band Edge - L																																																																																					
	U-NII-2C_5.47-5.725_802.11ac_VHT40_CH102_5510MHz																																																																																					
ANT	6																																																																																					
Pol.	Vertical	Fundamental																																																																																				
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5394.80</td> <td>53.48</td> <td>74.00</td> <td>-20.52</td> <td>39.53</td> <td>34.61</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5468.72</td> <td>54.10</td> <td>68.30</td> <td>-14.20</td> <td>40.02</td> <td>34.67</td> <td>9.91</td> <td>30.50</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5394.80	53.48	74.00	-20.52	39.53	34.61	9.84	30.50	100	360	PEAK	2	5468.72	54.10	68.30	-14.20	40.02	34.67	9.91	30.50	100	360	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>94.09</td> <td>-----</td> <td>-----</td> <td>79.94</td> <td>34.71</td> <td>9.95</td> <td>30.51</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5510.00	94.09	-----	-----	79.94	34.71	9.95	30.51	100	360	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5394.80	53.48	74.00	-20.52	39.53	34.61	9.84	30.50	100	360	PEAK																																																																											
2	5468.72	54.10	68.30	-14.20	40.02	34.67	9.91	30.50	100	360	PEAK																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5510.00	94.09	-----	-----	79.94	34.71	9.95	30.51	100	360	PEAK																																																																											
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.32</td> <td>43.57</td> <td>54.00</td> <td>-10.43</td> <td>29.51</td> <td>34.66</td> <td>9.90</td> <td>30.50</td> <td>100</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5458.32	43.57	54.00	-10.43	29.51	34.66	9.90	30.50	100	360	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>86.04</td> <td>-----</td> <td>-----</td> <td>71.89</td> <td>34.71</td> <td>9.95</td> <td>30.51</td> <td>100</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5510.00	86.04	-----	-----	71.89	34.71	9.95	30.51	100	360	AVERAGE												
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5458.32	43.57	54.00	-10.43	29.51	34.66	9.90	30.50	100	360	AVERAGE																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5510.00	86.04	-----	-----	71.89	34.71	9.95	30.51	100	360	AVERAGE																																																																											



Mode	23																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11ac VHT40_CH102_5510MHz																																									
ANT	6																																									
Pol.	Vertical	Fundamental																																								
Peak	<p>Date: 2023-06-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5745.37</td> <td>54.41</td> <td>68.30</td> <td>-13.89</td> <td>39.79</td> <td>35.09</td> <td>10.13</td> <td>30.60</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>100</td> <td>360 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5745.37	54.41	68.30	-13.89	39.79	35.09	10.13	30.60							100	360 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																			
1 5745.37	54.41	68.30	-13.89	39.79	35.09	10.13	30.60																																			
						100	360 PEAK																																			



		24																																																																																										
Mode	Band Edge - L																																																																																											
	U-NII-2C_5.47-5.725_802.11ac_VHT40_CH134_5670MHz																																																																																											
ANT	6																																																																																											
Pol.	Horizontal	Fundamental																																																																																										
Peak																																																																																												
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5413.68</td> <td>53.72</td> <td>74.00</td> <td>-20.28</td> <td>39.74</td> <td>34.63</td> <td>9.85</td> <td>30.50</td> <td>100</td> <td>59 PEAK</td> </tr> <tr> <td>2</td> <td>5462.64</td> <td>52.90</td> <td>68.30</td> <td>-15.40</td> <td>38.83</td> <td>34.67</td> <td>9.90</td> <td>30.50</td> <td>100</td> <td>59 PEAK</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5413.68	53.72	74.00	-20.28	39.74	34.63	9.85	30.50	100	59 PEAK	2	5462.64	52.90	68.30	-15.40	38.83	34.67	9.90	30.50	100	59 PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>99.96</td> <td>-----</td> <td>-----</td> <td>85.47</td> <td>34.97</td> <td>10.09</td> <td>30.57</td> <td>100</td> <td>59 PEAK</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5670.00	99.96	-----	-----	85.47	34.97	10.09	30.57	100
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5413.68	53.72	74.00	-20.28	39.74	34.63	9.85	30.50	100	59 PEAK																																																																																		
2	5462.64	52.90	68.30	-15.40	38.83	34.67	9.90	30.50	100	59 PEAK																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5670.00	99.96	-----	-----	85.47	34.97	10.09	30.57	100	59 PEAK																																																																																		
Avg																																																																																												
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5447.92</td> <td>43.09</td> <td>54.00</td> <td>-10.91</td> <td>29.05</td> <td>34.66</td> <td>9.88</td> <td>30.50</td> <td>100</td> <td>59 AVERAGE</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5447.92	43.09	54.00	-10.91	29.05	34.66	9.88	30.50	100	59 AVERAGE	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>91.49</td> <td>-----</td> <td>-----</td> <td>77.00</td> <td>34.97</td> <td>10.09</td> <td>30.57</td> <td>100</td> <td>59 AVERAGE</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5670.00	91.49	-----	-----	77.00	34.97	10.09	30.57	100	59 AVERAGE										
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5447.92	43.09	54.00	-10.91	29.05	34.66	9.88	30.50	100	59 AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5670.00	91.49	-----	-----	77.00	34.97	10.09	30.57	100	59 AVERAGE																																																																																		



Mode	24																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11ac VHT40_CH134_5670MHz																																									
ANT	6																																									
Pol.	Horizontal	Fundamental																																								
Peak	<p>Date: 2023-06-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5735.84</td> <td>57.22</td> <td>68.30</td> <td>-11.08</td> <td>42.61</td> <td>35.07</td> <td>10.13</td> <td>30.59</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>100</td> <td>59 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5735.84	57.22	68.30	-11.08	42.61	35.07	10.13	30.59							100	59 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																			
1 5735.84	57.22	68.30	-11.08	42.61	35.07	10.13	30.59																																			
						100	59 PEAK																																			







Mode	24																																																																																					
	Band Edge - L																																																																																					
	U-NII-2C_5.47-5.725_802.11ac_VHT40_CH134_5670MHz																																																																																					
ANT	6																																																																																					
Pol.	Vertical	Fundamental																																																																																				
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5415.28</td> <td>53.61</td> <td>74.00</td> <td>-20.39</td> <td>39.63</td> <td>34.63</td> <td>9.85</td> <td>30.50</td> <td>300</td> <td>244</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5462.00</td> <td>52.54</td> <td>68.30</td> <td>-15.76</td> <td>38.47</td> <td>34.67</td> <td>9.90</td> <td>30.50</td> <td>300</td> <td>244</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5415.28	53.61	74.00	-20.39	39.63	34.63	9.85	30.50	300	244	PEAK	2	5462.00	52.54	68.30	-15.76	38.47	34.67	9.90	30.50	300	244	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>91.86</td> <td>-----</td> <td>-----</td> <td>77.37</td> <td>34.97</td> <td>10.09</td> <td>30.57</td> <td>300</td> <td>244</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5670.00	91.86	-----	-----	77.37	34.97	10.09	30.57	300	244	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5415.28	53.61	74.00	-20.39	39.63	34.63	9.85	30.50	300	244	PEAK																																																																											
2	5462.00	52.54	68.30	-15.76	38.47	34.67	9.90	30.50	300	244	PEAK																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5670.00	91.86	-----	-----	77.37	34.97	10.09	30.57	300	244	PEAK																																																																											
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.52</td> <td>43.40</td> <td>54.00</td> <td>-10.60</td> <td>29.35</td> <td>34.66</td> <td>9.89</td> <td>30.50</td> <td>300</td> <td>244</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5457.52	43.40	54.00	-10.60	29.35	34.66	9.89	30.50	300	244	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>82.93</td> <td>-----</td> <td>-----</td> <td>68.44</td> <td>34.97</td> <td>10.09</td> <td>30.57</td> <td>300</td> <td>244</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5670.00	82.93	-----	-----	68.44	34.97	10.09	30.57	300	244	AVERAGE												
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5457.52	43.40	54.00	-10.60	29.35	34.66	9.89	30.50	300	244	AVERAGE																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5670.00	82.93	-----	-----	68.44	34.97	10.09	30.57	300	244	AVERAGE																																																																											



Mode	24																																		
	Band Edge - R																																		
	U-NII-2C_5.47-5.725_802.11ac VHT40_CH134_5670MHz																																		
ANT	6																																		
Pol.	Vertical	Fundamental																																	
Peak	<p>Date: 2023-06-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5731.56</td> <td>54.26</td> <td>68.30</td> <td>-14.04</td> <td>39.66</td> <td>35.07</td> <td>10.12</td> <td>30.59</td> <td>300 244 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5731.56	54.26	68.30	-14.04	39.66	35.07	10.12	30.59	300 244 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																												
1 5731.56	54.26	68.30	-14.04	39.66	35.07	10.12	30.59	300 244 PEAK																											

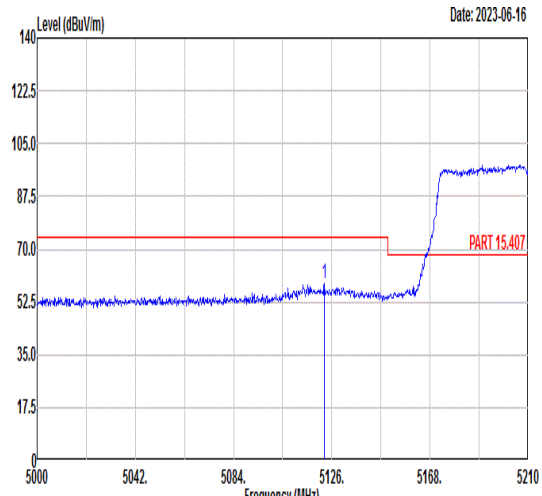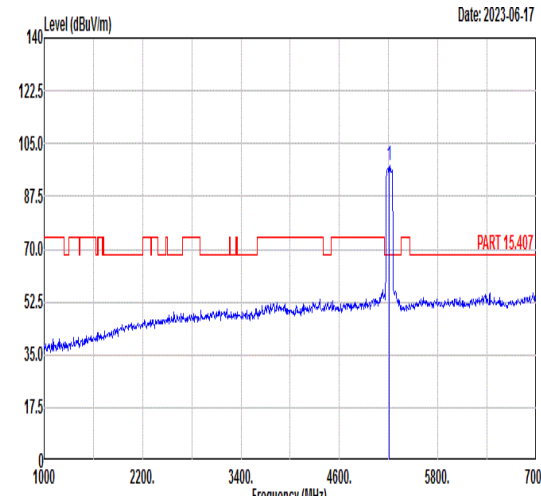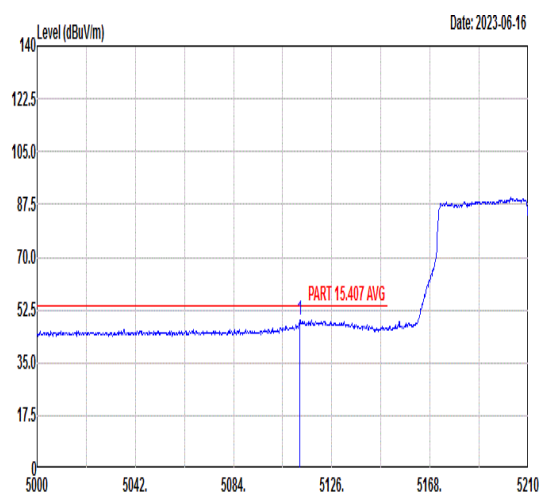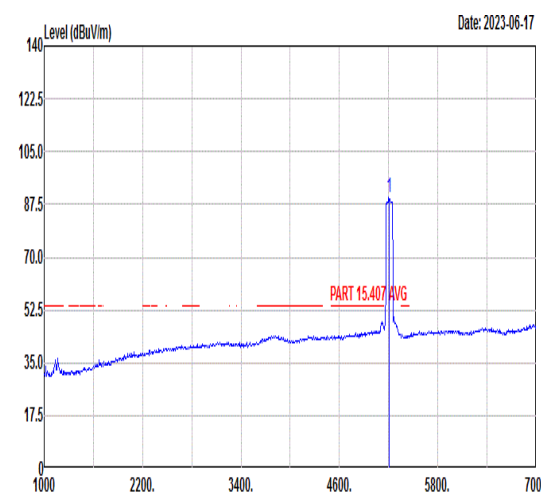

		25																																																																									
Mode	Band Edge - L																																																																										
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																																																										
ANT	6																																																																										
Pol.	Horizontal	Fundamental																																																																									
Peak	 <p style="text-align: right;">Date: 2023-06-16</p>		 <p style="text-align: right;">Date: 2023-06-17</p>																																																																								
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5122.85</td> <td>58.89</td> <td>74.00</td> <td>-15.11</td> <td>45.26</td> <td>34.40</td> <td>9.73</td> <td>30.50</td> <td>100</td> <td>119</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5122.85	58.89	74.00	-15.11	45.26	34.40	9.73	30.50	100	119	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>97.94</td> <td>-----</td> <td>-----</td> <td>84.15</td> <td>34.47</td> <td>9.82</td> <td>30.50</td> <td>100</td> <td>119</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5210.00	97.94	-----	-----	84.15	34.47	9.82	30.50	100	119
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																				
1	5122.85	58.89	74.00	-15.11	45.26	34.40	9.73	30.50	100	119	PEAK																																																																
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																				
1	5210.00	97.94	-----	-----	84.15	34.47	9.82	30.50	100	119	PEAK																																																																
Avg	 <p style="text-align: right;">Date: 2023-06-16</p>		 <p style="text-align: right;">Date: 2023-06-17</p>																																																																								
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5112.35</td> <td>49.37</td> <td>54.00</td> <td>-4.63</td> <td>35.76</td> <td>34.39</td> <td>9.72</td> <td>30.50</td> <td>100</td> <td>119</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5112.35	49.37	54.00	-4.63	35.76	34.39	9.72	30.50	100	119	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>89.63</td> <td>-----</td> <td>-----</td> <td>75.84</td> <td>34.47</td> <td>9.82</td> <td>30.50</td> <td>100</td> <td>119</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5210.00	89.63	-----	-----	75.84	34.47	9.82	30.50	100	119
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																				
1	5112.35	49.37	54.00	-4.63	35.76	34.39	9.72	30.50	100	119	AVERAGE																																																																
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																				
1	5210.00	89.63	-----	-----	75.84	34.47	9.82	30.50	100	119	AVERAGE																																																																



Mode	25																																																					
	Band Edge - R																																																					
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																																					
ANT	6																																																					
Pol.	Horizontal	Fundamental																																																				
Peak	<p>Date: 2023-06-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5378.00</td> <td>53.61</td> <td>74.00</td> <td>-20.39</td> <td>39.67</td> <td>34.60</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>119</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB								cm								deg	1	5378.00	53.61	74.00	-20.39	39.67	34.60	9.84	30.50	100	119	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																															
							cm																																															
							deg																																															
1	5378.00	53.61	74.00	-20.39	39.67	34.60	9.84	30.50	100	119	PEAK																																											
Avg	<p>Date: 2023-06-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5460.00</td> <td>44.71</td> <td>54.00</td> <td>-9.29</td> <td>30.65</td> <td>34.66</td> <td>9.90</td> <td>30.50</td> <td>100</td> <td>119</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB								cm								deg	1	5460.00	44.71	54.00	-9.29	30.65	34.66	9.90	30.50	100	119	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																															
							cm																																															
							deg																																															
1	5460.00	44.71	54.00	-9.29	30.65	34.66	9.90	30.50	100	119	AVERAGE																																											



Mode	25																																																																																																																	
	Band Edge - L																																																																																																																	
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																																																																																																	
ANT	6																																																																																																																	
Pol.	Vertical	Fundamental																																																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5090.19</td> <td>55.31</td> <td>74.00</td> <td>-18.69</td> <td>41.82</td> <td>34.34</td> <td>9.65</td> <td>30.50</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>344</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>125</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5090.19	55.31	74.00	-18.69	41.82	34.34	9.65	30.50								344								125								PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5210.00</td> <td>89.86</td> <td>-----</td> <td>-----</td> <td>76.07</td> <td>34.47</td> <td>9.82</td> <td>30.50</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>344</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>125</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5210.00	89.86	-----	-----	76.07	34.47	9.82	30.50								344								125								PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																																											
1 5090.19	55.31	74.00	-18.69	41.82	34.34	9.65	30.50																																																																																																											
							344																																																																																																											
							125																																																																																																											
							PEAK																																																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																																											
1 5210.00	89.86	-----	-----	76.07	34.47	9.82	30.50																																																																																																											
							344																																																																																																											
							125																																																																																																											
							PEAK																																																																																																											
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5130.20</td> <td>46.23</td> <td>54.00</td> <td>-7.77</td> <td>32.58</td> <td>34.41</td> <td>9.74</td> <td>30.50</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>344</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>125</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5130.20	46.23	54.00	-7.77	32.58	34.41	9.74	30.50								344								125								AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5210.00</td> <td>82.87</td> <td>-----</td> <td>-----</td> <td>69.08</td> <td>34.47</td> <td>9.82</td> <td>30.50</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>344</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>125</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5210.00	82.87	-----	-----	69.08	34.47	9.82	30.50								344								125								AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																																											
1 5130.20	46.23	54.00	-7.77	32.58	34.41	9.74	30.50																																																																																																											
							344																																																																																																											
							125																																																																																																											
							AVERAGE																																																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																																											
1 5210.00	82.87	-----	-----	69.08	34.47	9.82	30.50																																																																																																											
							344																																																																																																											
							125																																																																																																											
							AVERAGE																																																																																																											



	25																																						
Mode	Band Edge - R																																						
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																						
ANT	6																																						
Pol.	Vertical	Fundamental																																					
Peak	<p style="text-align: right;">Date: 2023-06-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.25</td> <td>53.35</td> <td>74.00</td> <td>-20.65</td> <td>39.30</td> <td>34.66</td> <td>9.89</td> <td>30.50</td> <td>344</td> <td>125</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5457.25	53.35	74.00	-20.65	39.30	34.66	9.89	30.50	344	125	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																															
1	5457.25	53.35	74.00	-20.65	39.30	34.66	9.89	30.50	344	125	PEAK																												
Blank																																							
Avg	<p style="text-align: right;">Date: 2023-06-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5453.75</td> <td>44.27</td> <td>54.00</td> <td>-9.73</td> <td>30.22</td> <td>34.66</td> <td>9.89</td> <td>30.50</td> <td>344</td> <td>125</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5453.75	44.27	54.00	-9.73	30.22	34.66	9.89	30.50	344	125	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																															
1	5453.75	44.27	54.00	-9.73	30.22	34.66	9.89	30.50	344	125	AVERAGE																												
Blank																																							



		26																																																																																
Mode	Band Edge - L																																																																																	
	U-NII-2A_5.25-5.35_802.11ac_VHT80_CH58_5290MHz																																																																																	
ANT	6																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak																																																																																		
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5051.91</td> <td>55.31</td> <td>74.00</td> <td>-18.69</td> <td>41.81</td> <td>34.34</td> <td>9.66</td> <td>30.50</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>100</td> <td>119 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5051.91	55.31	74.00	-18.69	41.81	34.34	9.66	30.50							100	119 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5290.00</td> <td>98.80</td> <td>-----</td> <td>-----</td> <td>84.94</td> <td>34.53</td> <td>9.83</td> <td>30.50</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>100</td> <td>119 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5290.00	98.80	-----	-----	84.94	34.53	9.83	30.50							100
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																											
1 5051.91	55.31	74.00	-18.69	41.81	34.34	9.66	30.50																																																																											
						100	119 PEAK																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																											
1 5290.00	98.80	-----	-----	84.94	34.53	9.83	30.50																																																																											
						100	119 PEAK																																																																											
Avg																																																																																		
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5145.58</td> <td>46.27</td> <td>54.00</td> <td>-7.73</td> <td>32.60</td> <td>34.42</td> <td>9.75</td> <td>30.50</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>100</td> <td>119 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5145.58	46.27	54.00	-7.73	32.60	34.42	9.75	30.50							100	119 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5290.00</td> <td>91.28</td> <td>-----</td> <td>-----</td> <td>77.42</td> <td>34.53</td> <td>9.83</td> <td>30.50</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>100</td> <td>119 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5290.00	91.28	-----	-----	77.42	34.53	9.83	30.50							100
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																											
1 5145.58	46.27	54.00	-7.73	32.60	34.42	9.75	30.50																																																																											
						100	119 AVERAGE																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																											
1 5290.00	91.28	-----	-----	77.42	34.53	9.83	30.50																																																																											
						100	119 AVERAGE																																																																											



Mode	26																																		
	Band Edge - R																																		
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz																																		
ANT	6																																		
Pol.	Horizontal	Fundamental																																	
Peak	<p>Date: 2023-06-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.18</td> <td>62.26</td> <td>74.00</td> <td>-11.74</td> <td>48.35</td> <td>34.58</td> <td>9.83 30.50 100 119</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg	1	5350.18	62.26	74.00	-11.74	48.35	34.58	9.83 30.50 100 119	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																												
Freq	Level	Line	Margin	Level	Factor	Loss Factor																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg																												
1	5350.18	62.26	74.00	-11.74	48.35	34.58	9.83 30.50 100 119	PEAK																											
Avg	<p>Date: 2023-06-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5363.78</td> <td>50.76</td> <td>54.00</td> <td>-3.24</td> <td>36.83</td> <td>34.59</td> <td>9.84 30.50 100 119</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg	1	5363.78	50.76	54.00	-3.24	36.83	34.59	9.84 30.50 100 119	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																												
Freq	Level	Line	Margin	Level	Factor	Loss Factor																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg																												
1	5363.78	50.76	54.00	-3.24	36.83	34.59	9.84 30.50 100 119	AVERAGE																											



Mode	26																																																																									
	Band Edge - L																																																																									
	U-NII-2A_5.25-5.35_802.11ac_VHT80_CH58_5290MHz																																																																									
ANT	6																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5080.91</td> <td>54.62</td> <td>74.00</td> <td>-19.38</td> <td>41.06</td> <td>34.37</td> <td>9.69</td> <td>30.50</td> <td>100</td> <td>130</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5080.91	54.62	74.00	-19.38	41.06	34.37	9.69	30.50	100	130	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>91.33</td> <td>-----</td> <td>-----</td> <td>77.47</td> <td>34.53</td> <td>9.83</td> <td>30.50</td> <td>100</td> <td>130</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5290.00	91.33	-----	-----	77.47	34.53	9.83	30.50	100	130	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5080.91	54.62	74.00	-19.38	41.06	34.37	9.69	30.50	100	130	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5290.00	91.33	-----	-----	77.47	34.53	9.83	30.50	100	130	PEAK																																																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5016.53</td> <td>45.79</td> <td>54.00</td> <td>-8.21</td> <td>32.35</td> <td>34.32</td> <td>9.62</td> <td>30.50</td> <td>100</td> <td>130</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5016.53	45.79	54.00	-8.21	32.35	34.32	9.62	30.50	100	130	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>83.44</td> <td>-----</td> <td>-----</td> <td>69.58</td> <td>34.53</td> <td>9.83</td> <td>30.50</td> <td>100</td> <td>130</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5290.00	83.44	-----	-----	69.58	34.53	9.83	30.50	100	130	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5016.53	45.79	54.00	-8.21	32.35	34.32	9.62	30.50	100	130	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5290.00	83.44	-----	-----	69.58	34.53	9.83	30.50	100	130	AVERAGE																																																															



Mode	26																																					
	Band Edge - R																																					
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz																																					
ANT	6																																					
Pol.	Vertical	Fundamental																																				
Peak	<p>Date: 2023-06-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5359.70</td> <td>53.89</td> <td>74.00</td> <td>-20.11</td> <td>39.96</td> <td>34.59</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>130</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5359.70	53.89	74.00	-20.11	39.96	34.59	9.84	30.50	100	130	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5359.70	53.89	74.00	-20.11	39.96	34.59	9.84	30.50	100	130	PEAK																											
Avg	<p>Date: 2023-06-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5375.68</td> <td>45.55</td> <td>54.00</td> <td>-8.45</td> <td>31.61</td> <td>34.60</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>130</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5375.68	45.55	54.00	-8.45	31.61	34.60	9.84	30.50	100	130	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5375.68	45.55	54.00	-8.45	31.61	34.60	9.84	30.50	100	130	AVERAGE																											







		27																																																																														
Mode	Band Edge - L																																																																															
	U-NII-2C_5.47-5.725_802.11ac_VHT80_CH106_5530MHz																																																																															
ANT	6																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5440.18</td> <td>56.23</td> <td>74.00</td> <td>-17.77</td> <td>42.20</td> <td>34.65</td> <td>9.88</td> <td>30.50</td> <td>100</td> <td>67 PEAK</td> </tr> <tr> <td>2</td> <td>5462.68</td> <td>54.78</td> <td>68.30</td> <td>-13.52</td> <td>40.71</td> <td>34.67</td> <td>9.90</td> <td>30.50</td> <td>100</td> <td>67 PEAK</td> </tr> </tbody> </table>		Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg		1	5440.18	56.23	74.00	-17.77	42.20	34.65	9.88	30.50	100	67 PEAK	2	5462.68	54.78	68.30	-13.52	40.71	34.67	9.90	30.50	100	67 PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>95.94</td> <td>-----</td> <td>-----</td> <td>81.74</td> <td>34.74</td> <td>9.97</td> <td>30.51</td> <td>100</td> <td>67 PEAK</td> </tr> </tbody> </table>			Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg		1	5530.00	95.94	-----	-----	81.74	34.74	9.97	30.51	100	67 PEAK
		Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																							
1	5440.18	56.23	74.00	-17.77	42.20	34.65	9.88	30.50	100	67 PEAK																																																																						
2	5462.68	54.78	68.30	-13.52	40.71	34.67	9.90	30.50	100	67 PEAK																																																																						
	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																							
1	5530.00	95.94	-----	-----	81.74	34.74	9.97	30.51	100	67 PEAK																																																																						
Avg	<table border="1"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5432.80</td> <td>50.90</td> <td>54.00</td> <td>-3.10</td> <td>36.89</td> <td>34.64</td> <td>9.87</td> <td>30.50</td> <td>100</td> <td>67 AVERAGE</td> </tr> </tbody> </table>		Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg		1	5432.80	50.90	54.00	-3.10	36.89	34.64	9.87	30.50	100	67 AVERAGE	<table border="1"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>89.20</td> <td>-----</td> <td>-----</td> <td>75.00</td> <td>34.74</td> <td>9.97</td> <td>30.51</td> <td>100</td> <td>67 AVERAGE</td> </tr> </tbody> </table>			Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg		1	5530.00	89.20	-----	-----	75.00	34.74	9.97	30.51	100	67 AVERAGE											
		Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																							
1	5432.80	50.90	54.00	-3.10	36.89	34.64	9.87	30.50	100	67 AVERAGE																																																																						
	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																							
1	5530.00	89.20	-----	-----	75.00	34.74	9.97	30.51	100	67 AVERAGE																																																																						



Mode	27																																				
	Band Edge - R																																				
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz																																				
ANT	6																																				
Pol.	Horizontal	Fundamental																																			
Peak	<p>Date: 2023-06-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5751.14</td> <td>54.06</td> <td>68.30</td> <td>-14.24</td> <td>39.43</td> <td>35.10</td> <td>10.13</td> <td>30.60</td> <td>100</td> <td>67 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5751.14	54.06	68.30	-14.24	39.43	35.10	10.13	30.60	100	67 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																													
1 5751.14	54.06	68.30	-14.24	39.43	35.10	10.13	30.60	100	67 PEAK																												

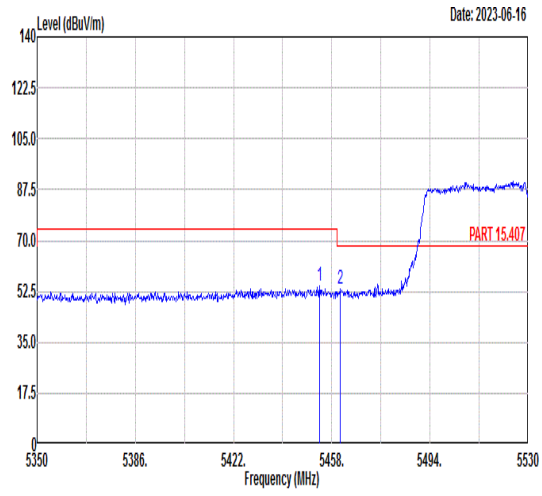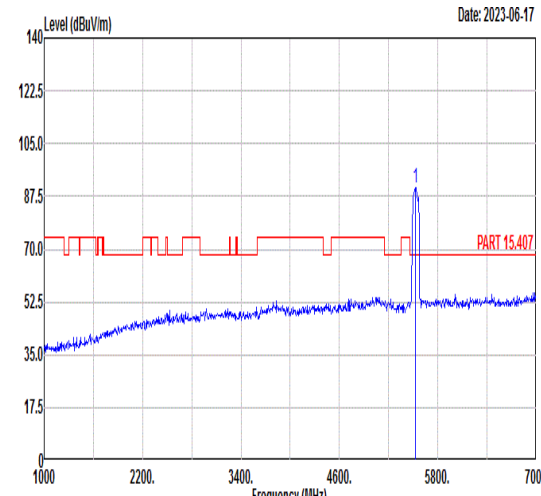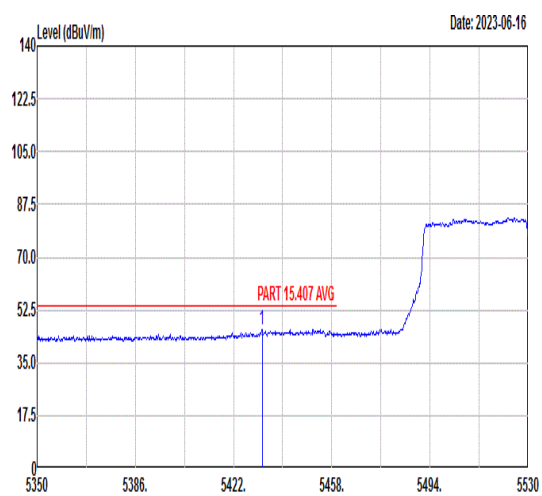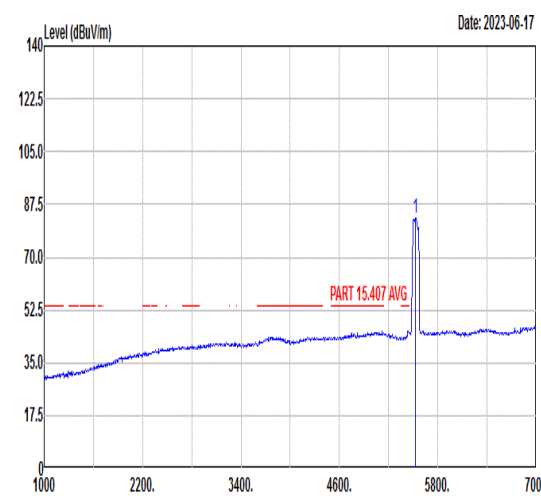

		27																																																																																				
Mode		Band Edge - L																																																																																				
		U-NII-2C_5.47-5.725_802.11ac_VHT80_CH106_5530MHz																																																																																				
ANT		6																																																																																				
Pol.		Vertical	Fundamental																																																																																			
Peak	 <p style="text-align: right;">Date: 2023-06-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5453.50</td> <td>54.68</td> <td>74.00</td> <td>-19.32</td> <td>40.63</td> <td>34.66</td> <td>9.89</td> <td>30.50</td> <td>100</td> <td>130</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5461.06</td> <td>53.10</td> <td>68.30</td> <td>-15.20</td> <td>39.03</td> <td>34.67</td> <td>9.90</td> <td>30.50</td> <td>100</td> <td>130</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5453.50	54.68	74.00	-19.32	40.63	34.66	9.89	30.50	100	130	PEAK	2	5461.06	53.10	68.30	-15.20	39.03	34.67	9.90	30.50	100	130	PEAK	 <p style="text-align: right;">Date: 2023-06-17</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>90.16</td> <td>-----</td> <td>-----</td> <td>75.96</td> <td>34.74</td> <td>9.97</td> <td>30.51</td> <td>100</td> <td>130</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5530.00	90.16	-----	-----	75.96	34.74	9.97	30.51	100	130	PEAK
	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5453.50	54.68	74.00	-19.32	40.63	34.66	9.89	30.50	100	130	PEAK																																																																											
2	5461.06	53.10	68.30	-15.20	39.03	34.67	9.90	30.50	100	130	PEAK																																																																											
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5530.00	90.16	-----	-----	75.96	34.74	9.97	30.51	100	130	PEAK																																																																											
Avg	 <p style="text-align: right;">Date: 2023-06-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5432.44</td> <td>46.22</td> <td>54.00</td> <td>-7.78</td> <td>32.21</td> <td>34.64</td> <td>9.87</td> <td>30.50</td> <td>100</td> <td>130</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5432.44	46.22	54.00	-7.78	32.21	34.64	9.87	30.50	100	130	AVERAGE	 <p style="text-align: right;">Date: 2023-06-17</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>82.88</td> <td>-----</td> <td>-----</td> <td>68.68</td> <td>34.74</td> <td>9.97</td> <td>30.51</td> <td>100</td> <td>130</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5530.00	82.88	-----	-----	68.68	34.74	9.97	30.51	100	130	AVERAGE												
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5432.44	46.22	54.00	-7.78	32.21	34.64	9.87	30.50	100	130	AVERAGE																																																																											
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5530.00	82.88	-----	-----	68.68	34.74	9.97	30.51	100	130	AVERAGE																																																																											



Mode	27																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz																																									
ANT	6																																									
Pol.	Vertical	Fundamental																																								
Peak	<p>Date: 2023-06-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5738.21</td> <td>54.07</td> <td>68.30</td> <td>-14.23</td> <td>39.45</td> <td>35.08</td> <td>10.13</td> <td>30.59</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>100</td> <td>130 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5738.21	54.07	68.30	-14.23	39.45	35.08	10.13	30.59							100	130 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																			
1 5738.21	54.07	68.30	-14.23	39.45	35.08	10.13	30.59																																			
						100	130 PEAK																																			



Mode	27																																																																																																
	Harmonic																																																																																																
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz																																																																																																
ANT	6																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg																																																																																																	
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11060.00</td> <td>49.09</td> <td>74.00</td> <td>-24.91</td> <td>55.34</td> <td>38.16</td> <td>13.75</td> <td>58.16</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>16590.00</td> <td>50.94</td> <td>68.30</td> <td>-17.36</td> <td>51.08</td> <td>41.00</td> <td>16.20</td> <td>57.34</td> <td>--- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Apos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11060.00	49.09	74.00	-24.91	55.34	38.16	13.75	58.16	--- Peak	2	16590.00	50.94	68.30	-17.36	51.08	41.00	16.20	57.34	--- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11060.00</td> <td>49.86</td> <td>74.00</td> <td>-24.14</td> <td>56.11</td> <td>38.16</td> <td>13.75</td> <td>58.16</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>16590.00</td> <td>50.97</td> <td>68.30</td> <td>-17.33</td> <td>51.11</td> <td>41.00</td> <td>16.20</td> <td>57.34</td> <td>--- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Apos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11060.00	49.86	74.00	-24.14	56.11	38.16	13.75	58.16	--- Peak	2	16590.00	50.97	68.30	-17.33	51.11	41.00	16.20	57.34
	Limit	Read	Ant	Cable	Preamp	Apos	TPos																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	11060.00	49.09	74.00	-24.91	55.34	38.16	13.75	58.16	--- Peak																																																																																								
2	16590.00	50.94	68.30	-17.36	51.08	41.00	16.20	57.34	--- Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Apos	TPos																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	11060.00	49.86	74.00	-24.14	56.11	38.16	13.75	58.16	--- Peak																																																																																								
2	16590.00	50.97	68.30	-17.33	51.11	41.00	16.20	57.34	--- Peak																																																																																								



		28																																																																																				
Mode	Band Edge - L																																																																																					
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz																																																																																					
ANT	6																																																																																					
Pol.	Horizontal	Fundamental																																																																																				
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5453.22</td> <td>53.92</td> <td>74.00</td> <td>-20.08</td> <td>39.87</td> <td>34.66</td> <td>9.89</td> <td>30.50</td> <td>100</td> <td>78</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5462.58</td> <td>53.39</td> <td>68.30</td> <td>-14.91</td> <td>39.32</td> <td>34.67</td> <td>9.90</td> <td>30.50</td> <td>100</td> <td>78</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5453.22	53.92	74.00	-20.08	39.87	34.66	9.89	30.50	100	78	PEAK	2	5462.58	53.39	68.30	-14.91	39.32	34.67	9.90	30.50	100	78	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>98.62</td> <td>-----</td> <td>-----</td> <td>84.25</td> <td>34.87</td> <td>10.05</td> <td>30.55</td> <td>100</td> <td>78</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5610.00	98.62	-----	-----	84.25	34.87	10.05	30.55	100	78	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5453.22	53.92	74.00	-20.08	39.87	34.66	9.89	30.50	100	78	PEAK																																																																											
2	5462.58	53.39	68.30	-14.91	39.32	34.67	9.90	30.50	100	78	PEAK																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5610.00	98.62	-----	-----	84.25	34.87	10.05	30.55	100	78	PEAK																																																																											
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5452.44</td> <td>45.10</td> <td>54.00</td> <td>-8.90</td> <td>31.05</td> <td>34.66</td> <td>9.89</td> <td>30.50</td> <td>100</td> <td>78</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5452.44	45.10	54.00	-8.90	31.05	34.66	9.89	30.50	100	78	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>89.54</td> <td>-----</td> <td>-----</td> <td>75.17</td> <td>34.87</td> <td>10.05</td> <td>30.55</td> <td>100</td> <td>78</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5610.00	89.54	-----	-----	75.17	34.87	10.05	30.55	100	78	AVERAGE												
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5452.44	45.10	54.00	-8.90	31.05	34.66	9.89	30.50	100	78	AVERAGE																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5610.00	89.54	-----	-----	75.17	34.87	10.05	30.55	100	78	AVERAGE																																																																											



Mode	28																																					
	Band Edge - R																																					
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz																																					
ANT	6																																					
Pol.	Horizontal	Fundamental																																				
Peak	<p>Date: 2023-06-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5725.79</td> <td>56.05</td> <td>68.30</td> <td>-12.25</td> <td>41.46</td> <td>35.06</td> <td>10.12</td> <td>30.59</td> <td>100</td> <td>78</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5725.79	56.05	68.30	-12.25	41.46	35.06	10.12	30.59	100	78	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5725.79	56.05	68.30	-12.25	41.46	35.06	10.12	30.59	100	78	PEAK																											



		28																																																																																				
Mode	Band Edge - L																																																																																					
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz																																																																																					
ANT	6																																																																																					
Pol.	Vertical	Fundamental																																																																																				
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5415.78</td> <td>53.92</td> <td>74.00</td> <td>-20.08</td> <td>39.94</td> <td>34.63</td> <td>9.85</td> <td>30.50</td> <td>100</td> <td>128</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5462.84</td> <td>52.85</td> <td>68.30</td> <td>-15.45</td> <td>38.78</td> <td>34.67</td> <td>9.90</td> <td>30.50</td> <td>100</td> <td>128</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5415.78	53.92	74.00	-20.08	39.94	34.63	9.85	30.50	100	128	PEAK	2	5462.84	52.85	68.30	-15.45	38.78	34.67	9.90	30.50	100	128	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>91.96</td> <td>-----</td> <td>-----</td> <td>77.59</td> <td>34.87</td> <td>10.05</td> <td>30.55</td> <td>100</td> <td>128</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5610.00	91.96	-----	-----	77.59	34.87	10.05	30.55	100	128	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5415.78	53.92	74.00	-20.08	39.94	34.63	9.85	30.50	100	128	PEAK																																																																											
2	5462.84	52.85	68.30	-15.45	38.78	34.67	9.90	30.50	100	128	PEAK																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5610.00	91.96	-----	-----	77.59	34.87	10.05	30.55	100	128	PEAK																																																																											
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5417.34</td> <td>44.41</td> <td>54.00</td> <td>-9.59</td> <td>30.43</td> <td>34.63</td> <td>9.85</td> <td>30.50</td> <td>100</td> <td>128</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5417.34	44.41	54.00	-9.59	30.43	34.63	9.85	30.50	100	128	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>84.33</td> <td>-----</td> <td>-----</td> <td>69.96</td> <td>34.87</td> <td>10.05</td> <td>30.55</td> <td>100</td> <td>128</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5610.00	84.33	-----	-----	69.96	34.87	10.05	30.55	100	128	AVERAGE												
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5417.34	44.41	54.00	-9.59	30.43	34.63	9.85	30.50	100	128	AVERAGE																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5610.00	84.33	-----	-----	69.96	34.87	10.05	30.55	100	128	AVERAGE																																																																											



Mode	28																																	
	Band Edge - R																																	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz																																	
ANT	6																																	
Pol.	Vertical	Fundamental																																
Peak	<p>Date: 2023-06-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1 5759.89</td> <td>54.93</td> <td>68.30</td> <td>-13.37</td> <td>40.28</td> <td>35.11</td> <td>10.14 30.60</td> <td>100 128 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg	1 5759.89	54.93	68.30	-13.37	40.28	35.11	10.14 30.60	100 128 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg																											
1 5759.89	54.93	68.30	-13.37	40.28	35.11	10.14 30.60	100 128 PEAK																											



Mode	29																																																																																																			
	Harmonic																																																																																																			
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																			
ANT	6																																																																																																			
Pol.	Horizontal	Vertical																																																																																																		
Peak Avg	<p>Date: 2023-06-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>49.11</td> <td>74.00</td> <td>-24.89</td> <td>54.73</td> <td>38.58</td> <td>13.71</td> <td>57.91</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17235.00</td> <td>50.02</td> <td>68.30</td> <td>-18.28</td> <td>49.03</td> <td>41.29</td> <td>16.53</td> <td>56.83</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11490.00	49.11	74.00	-24.89	54.73	38.58	13.71	57.91	---	---	Peak	2	17235.00	50.02	68.30	-18.28	49.03	41.29	16.53	56.83	---	---	Peak	<p>Date: 2023-06-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>49.39</td> <td>74.00</td> <td>-24.61</td> <td>55.01</td> <td>38.58</td> <td>13.71</td> <td>57.91</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17235.00</td> <td>50.10</td> <td>68.30</td> <td>-18.20</td> <td>49.11</td> <td>41.29</td> <td>16.53</td> <td>56.83</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11490.00	49.39	74.00	-24.61	55.01	38.58	13.71	57.91	---	---	Peak	2	17235.00	50.10	68.30	-18.20	49.11	41.29	16.53	56.83	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																												
1	11490.00	49.11	74.00	-24.89	54.73	38.58	13.71	57.91	---	---	Peak																																																																																									
2	17235.00	50.02	68.30	-18.28	49.03	41.29	16.53	56.83	---	---	Peak																																																																																									
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																												
1	11490.00	49.39	74.00	-24.61	55.01	38.58	13.71	57.91	---	---	Peak																																																																																									
2	17235.00	50.10	68.30	-18.20	49.11	41.29	16.53	56.83	---	---	Peak																																																																																									



Mode	30																																																																																																	
	Harmonic																																																																																																	
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																																																	
ANT	6																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>50.49</td> <td>74.00</td> <td>-23.51</td> <td>56.02</td> <td>38.68</td> <td>13.70</td> <td>57.91</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17355.00</td> <td>50.48</td> <td>68.30</td> <td>-17.82</td> <td>49.59</td> <td>41.34</td> <td>16.50</td> <td>56.95</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11570.00	50.49	74.00	-23.51	56.02	38.68	13.70	57.91	---	---	Peak	2	17355.00	50.48	68.30	-17.82	49.59	41.34	16.50	56.95	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>49.74</td> <td>74.00</td> <td>-24.26</td> <td>55.27</td> <td>38.68</td> <td>13.70</td> <td>57.91</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17355.00</td> <td>50.72</td> <td>68.30</td> <td>-17.58</td> <td>49.83</td> <td>41.34</td> <td>16.50</td> <td>56.95</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11570.00	49.74	74.00	-24.26	55.27	38.68	13.70	57.91	---	---	Peak	2	17355.00	50.72	68.30	-17.58	49.83	41.34	16.50	56.95	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11570.00	50.49	74.00	-23.51	56.02	38.68	13.70	57.91	---	---	Peak																																																																																							
2	17355.00	50.48	68.30	-17.82	49.59	41.34	16.50	56.95	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11570.00	49.74	74.00	-24.26	55.27	38.68	13.70	57.91	---	---	Peak																																																																																							
2	17355.00	50.72	68.30	-17.58	49.83	41.34	16.50	56.95	---	---	Peak																																																																																							



Mode	31																																																																																																	
	Harmonic																																																																																																	
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHZ																																																																																																	
ANT	6																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p>Date: 2023-06-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>50.01</td> <td>74.00</td> <td>-23.99</td> <td>55.47</td> <td>38.78</td> <td>13.69</td> <td>57.93</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17475.00</td> <td>50.34</td> <td>68.30</td> <td>-17.96</td> <td>49.55</td> <td>41.39</td> <td>16.47</td> <td>57.07</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11650.00	50.01	74.00	-23.99	55.47	38.78	13.69	57.93	---	---	Peak	2	17475.00	50.34	68.30	-17.96	49.55	41.39	16.47	57.07	---	---	Peak	<p>Date: 2023-06-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>49.78</td> <td>74.00</td> <td>-24.22</td> <td>55.24</td> <td>38.78</td> <td>13.69</td> <td>57.93</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17475.00</td> <td>50.95</td> <td>68.30</td> <td>-17.35</td> <td>50.16</td> <td>41.39</td> <td>16.47</td> <td>57.07</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11650.00	49.78	74.00	-24.22	55.24	38.78	13.69	57.93	---	---	Peak	2	17475.00	50.95	68.30	-17.35	50.16	41.39	16.47	57.07	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11650.00	50.01	74.00	-23.99	55.47	38.78	13.69	57.93	---	---	Peak																																																																																							
2	17475.00	50.34	68.30	-17.96	49.55	41.39	16.47	57.07	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11650.00	49.78	74.00	-24.22	55.24	38.78	13.69	57.93	---	---	Peak																																																																																							
2	17475.00	50.95	68.30	-17.35	50.16	41.39	16.47	57.07	---	---	Peak																																																																																							



Mode	32																																																																																																															
	Band Edge																																																																																																															
	U-NII-3_5.725-5.85_802.11ac VHT20_CH149_5745MHz																																																																																																															
ANT	6																																																																																																															
Pol.	Horizontal	Fundamental																																																																																																														
Peak	<p>Date: 2023-06-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5647.56</td> <td>54.91</td> <td>68.30</td> <td>-13.39</td> <td>40.46</td> <td>34.93</td> <td>10.08</td> <td>30.56</td> <td>100</td> <td>72</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.17</td> <td>52.72</td> <td>68.43</td> <td>-15.71</td> <td>38.26</td> <td>34.94</td> <td>10.08</td> <td>30.56</td> <td>100</td> <td>72</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5719.34</td> <td>62.01</td> <td>110.61</td> <td>-48.60</td> <td>47.43</td> <td>35.05</td> <td>10.12</td> <td>30.59</td> <td>100</td> <td>72</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.06</td> <td>60.04</td> <td>110.94</td> <td>-50.90</td> <td>45.46</td> <td>35.05</td> <td>10.12</td> <td>30.59</td> <td>100</td> <td>72</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5647.56	54.91	68.30	-13.39	40.46	34.93	10.08	30.56	100	72	PEAK	2	5650.17	52.72	68.43	-15.71	38.26	34.94	10.08	30.56	100	72	PEAK	3	5719.34	62.01	110.61	-48.60	47.43	35.05	10.12	30.59	100	72	PEAK	4	5720.06	60.04	110.94	-50.90	45.46	35.05	10.12	30.59	100	72	PEAK	<p>Date: 2023-06-17</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>104.88</td> <td>-----</td> <td>-----</td> <td>90.26</td> <td>35.09</td> <td>10.13</td> <td>30.60</td> <td>100</td> <td>72</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5745.00	104.88	-----	-----	90.26	35.09	10.13	30.60	100	72	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																								
1	5647.56	54.91	68.30	-13.39	40.46	34.93	10.08	30.56	100	72	PEAK																																																																																																					
2	5650.17	52.72	68.43	-15.71	38.26	34.94	10.08	30.56	100	72	PEAK																																																																																																					
3	5719.34	62.01	110.61	-48.60	47.43	35.05	10.12	30.59	100	72	PEAK																																																																																																					
4	5720.06	60.04	110.94	-50.90	45.46	35.05	10.12	30.59	100	72	PEAK																																																																																																					
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																								
1	5745.00	104.88	-----	-----	90.26	35.09	10.13	30.60	100	72	PEAK																																																																																																					
Avg	Blank	<p>Date: 2023-06-17</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>96.93</td> <td>-----</td> <td>-----</td> <td>82.31</td> <td>35.09</td> <td>10.13</td> <td>30.60</td> <td>100</td> <td>72</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5745.00	96.93	-----	-----	82.31	35.09	10.13	30.60	100	72	AVERAGE																																																																									
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																								
1	5745.00	96.93	-----	-----	82.31	35.09	10.13	30.60	100	72	AVERAGE																																																																																																					



	32																																																																																																															
Mode	Band Edge																																																																																																															
	U-NII-3_5.725-5.85_802.11ac VHT20_CH149_5745MHz																																																																																																															
ANT	6																																																																																																															
Pol.	Vertical	Fundamental																																																																																																														
Peak	<p>Date: 2023-06-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5615.23</td> <td>54.63</td> <td>68.30</td> <td>-13.67</td> <td>40.24</td> <td>34.88</td> <td>10.06</td> <td>30.55</td> <td>100</td> <td>346</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.17</td> <td>52.27</td> <td>68.43</td> <td>-16.16</td> <td>37.81</td> <td>34.94</td> <td>10.08</td> <td>30.56</td> <td>100</td> <td>346</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5701.07</td> <td>53.33</td> <td>105.50</td> <td>-52.17</td> <td>38.78</td> <td>35.02</td> <td>10.11</td> <td>30.58</td> <td>100</td> <td>346</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.64</td> <td>55.03</td> <td>112.26</td> <td>-57.23</td> <td>40.45</td> <td>35.05</td> <td>10.12</td> <td>30.59</td> <td>100</td> <td>346</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5615.23	54.63	68.30	-13.67	40.24	34.88	10.06	30.55	100	346	PEAK	2	5650.17	52.27	68.43	-16.16	37.81	34.94	10.08	30.56	100	346	PEAK	3	5701.07	53.33	105.50	-52.17	38.78	35.02	10.11	30.58	100	346	PEAK	4	5720.64	55.03	112.26	-57.23	40.45	35.05	10.12	30.59	100	346	PEAK	<p>Date: 2023-06-17</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>98.17</td> <td>-----</td> <td>-----</td> <td>83.55</td> <td>35.09</td> <td>10.13</td> <td>30.60</td> <td>100</td> <td>346</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5745.00	98.17	-----	-----	83.55	35.09	10.13	30.60	100	346	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																								
1	5615.23	54.63	68.30	-13.67	40.24	34.88	10.06	30.55	100	346	PEAK																																																																																																					
2	5650.17	52.27	68.43	-16.16	37.81	34.94	10.08	30.56	100	346	PEAK																																																																																																					
3	5701.07	53.33	105.50	-52.17	38.78	35.02	10.11	30.58	100	346	PEAK																																																																																																					
4	5720.64	55.03	112.26	-57.23	40.45	35.05	10.12	30.59	100	346	PEAK																																																																																																					
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																								
1	5745.00	98.17	-----	-----	83.55	35.09	10.13	30.60	100	346	PEAK																																																																																																					
Avg	Blank	<p>Date: 2023-06-17</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>90.07</td> <td>-----</td> <td>-----</td> <td>75.45</td> <td>35.09</td> <td>10.13</td> <td>30.60</td> <td>100</td> <td>346</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5745.00	90.07	-----	-----	75.45	35.09	10.13	30.60	100	346	AVERAGE																																																																									
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																								
1	5745.00	90.07	-----	-----	75.45	35.09	10.13	30.60	100	346	AVERAGE																																																																																																					



Mode	32																																																																																																	
	Harmonic																																																																																																	
	U-NII-3_5.725-5.85_802.11ac VHT20_CH149_5745MHz																																																																																																	
ANT	6																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>49.30</td> <td>74.00</td> <td>-24.70</td> <td>54.92</td> <td>38.58</td> <td>13.71</td> <td>57.91</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17235.00</td> <td>50.03</td> <td>68.30</td> <td>-18.27</td> <td>49.04</td> <td>41.29</td> <td>16.53</td> <td>56.83</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11490.00	49.30	74.00	-24.70	54.92	38.58	13.71	57.91	---	---	Peak	2	17235.00	50.03	68.30	-18.27	49.04	41.29	16.53	56.83	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>49.30</td> <td>74.00</td> <td>-24.70</td> <td>54.92</td> <td>38.58</td> <td>13.71</td> <td>57.91</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17235.00</td> <td>50.29</td> <td>68.30</td> <td>-18.01</td> <td>49.30</td> <td>41.29</td> <td>16.53</td> <td>56.83</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11490.00	49.30	74.00	-24.70	54.92	38.58	13.71	57.91	---	---	Peak	2	17235.00	50.29	68.30	-18.01	49.30	41.29	16.53	56.83	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11490.00	49.30	74.00	-24.70	54.92	38.58	13.71	57.91	---	---	Peak																																																																																							
2	17235.00	50.03	68.30	-18.27	49.04	41.29	16.53	56.83	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11490.00	49.30	74.00	-24.70	54.92	38.58	13.71	57.91	---	---	Peak																																																																																							
2	17235.00	50.29	68.30	-18.01	49.30	41.29	16.53	56.83	---	---	Peak																																																																																							



Mode	33																																																																																																			
	Harmonic																																																																																																			
	U-NII-3_5.725-5.85_802.11ac VHT20_CH157_5785MHz																																																																																																			
ANT	6																																																																																																			
Pol.	Horizontal	Vertical																																																																																																		
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>49.57</td> <td>74.00</td> <td>-24.43</td> <td>55.10</td> <td>38.68</td> <td>13.70</td> <td>57.91</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17355.00</td> <td>50.23</td> <td>68.30</td> <td>-18.07</td> <td>49.34</td> <td>41.34</td> <td>16.50</td> <td>56.95</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11570.00	49.57	74.00	-24.43	55.10	38.68	13.70	57.91	---	---	Peak	2	17355.00	50.23	68.30	-18.07	49.34	41.34	16.50	56.95	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>50.27</td> <td>74.00</td> <td>-23.73</td> <td>55.80</td> <td>38.68</td> <td>13.70</td> <td>57.91</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17355.00</td> <td>50.39</td> <td>68.30</td> <td>-17.91</td> <td>49.50</td> <td>41.34</td> <td>16.50</td> <td>56.95</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11570.00	50.27	74.00	-23.73	55.80	38.68	13.70	57.91	---	---	Peak	2	17355.00	50.39	68.30	-17.91	49.50	41.34	16.50	56.95	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																												
1	11570.00	49.57	74.00	-24.43	55.10	38.68	13.70	57.91	---	---	Peak																																																																																									
2	17355.00	50.23	68.30	-18.07	49.34	41.34	16.50	56.95	---	---	Peak																																																																																									
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																												
1	11570.00	50.27	74.00	-23.73	55.80	38.68	13.70	57.91	---	---	Peak																																																																																									
2	17355.00	50.39	68.30	-17.91	49.50	41.34	16.50	56.95	---	---	Peak																																																																																									



Mode	34																																																																																																													
	Band Edge																																																																																																													
	U-NII-3_5.725-5.85_802.11ac VHT20_CH165_5825MHz																																																																																																													
ANT	6																																																																																																													
Pol.	Horizontal	Fundamental																																																																																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.38</td> <td>61.00</td> <td>112.22</td> <td>-51.22</td> <td>46.17</td> <td>35.27</td> <td>10.20</td> <td>30.64</td> <td>100</td> <td>61</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5866.63</td> <td>59.85</td> <td>107.54</td> <td>-47.69</td> <td>44.99</td> <td>35.29</td> <td>10.21</td> <td>30.64</td> <td>100</td> <td>61</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.75</td> <td>54.10</td> <td>68.38</td> <td>-14.28</td> <td>39.14</td> <td>35.38</td> <td>10.25</td> <td>30.67</td> <td>100</td> <td>61</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5945.75</td> <td>54.92</td> <td>68.30</td> <td>-13.38</td> <td>39.91</td> <td>35.42</td> <td>10.26</td> <td>30.67</td> <td>100</td> <td>61</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5854.38	61.00	112.22	-51.22	46.17	35.27	10.20	30.64	100	61	PEAK	2	5866.63	59.85	107.54	-47.69	44.99	35.29	10.21	30.64	100	61	PEAK	3	5924.75	54.10	68.38	-14.28	39.14	35.38	10.25	30.67	100	61	PEAK	4	5945.75	54.92	68.30	-13.38	39.91	35.42	10.26	30.67	100	61	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>106.43</td> <td>-----</td> <td>-----</td> <td>91.66</td> <td>35.22</td> <td>10.18</td> <td>30.63</td> <td>100</td> <td>61</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5825.00	106.43	-----	-----	91.66	35.22	10.18	30.63	100	61	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5854.38	61.00	112.22	-51.22	46.17	35.27	10.20	30.64	100	61	PEAK																																																																																																			
2	5866.63	59.85	107.54	-47.69	44.99	35.29	10.21	30.64	100	61	PEAK																																																																																																			
3	5924.75	54.10	68.38	-14.28	39.14	35.38	10.25	30.67	100	61	PEAK																																																																																																			
4	5945.75	54.92	68.30	-13.38	39.91	35.42	10.26	30.67	100	61	PEAK																																																																																																			
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5825.00	106.43	-----	-----	91.66	35.22	10.18	30.63	100	61	PEAK																																																																																																			
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>98.13</td> <td>-----</td> <td>-----</td> <td>83.36</td> <td>35.22</td> <td>10.18</td> <td>30.63</td> <td>100</td> <td>61</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5825.00	98.13	-----	-----	83.36	35.22	10.18	30.63	100	61	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5825.00	98.13	-----	-----	83.36	35.22	10.18	30.63	100	61	AVERAGE																																																																																																			



Mode	34																																																																																																													
	Band Edge																																																																																																													
	U-NII-3_5.725-5.85_802.11ac VHT20_CH165_5825MHz																																																																																																													
ANT	6																																																																																																													
Pol.	Vertical	Fundamental																																																																																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.88</td> <td>53.99</td> <td>111.08</td> <td>-57.09</td> <td>39.16</td> <td>35.27</td> <td>10.20</td> <td>30.64</td> <td>100</td> <td>346</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5871.88</td> <td>54.59</td> <td>106.07</td> <td>-51.48</td> <td>39.73</td> <td>35.30</td> <td>10.21</td> <td>30.65</td> <td>100</td> <td>346</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.75</td> <td>53.41</td> <td>68.38</td> <td>-14.97</td> <td>38.45</td> <td>35.38</td> <td>10.25</td> <td>30.67</td> <td>100</td> <td>346</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5928.88</td> <td>55.09</td> <td>68.30</td> <td>-13.21</td> <td>40.12</td> <td>35.39</td> <td>10.25</td> <td>30.67</td> <td>100</td> <td>346</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5854.88	53.99	111.08	-57.09	39.16	35.27	10.20	30.64	100	346	PEAK	2	5871.88	54.59	106.07	-51.48	39.73	35.30	10.21	30.65	100	346	PEAK	3	5924.75	53.41	68.38	-14.97	38.45	35.38	10.25	30.67	100	346	PEAK	4	5928.88	55.09	68.30	-13.21	40.12	35.39	10.25	30.67	100	346	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>98.77</td> <td>-----</td> <td>-----</td> <td>84.00</td> <td>35.22</td> <td>10.18</td> <td>30.63</td> <td>100</td> <td>346</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5825.00	98.77	-----	-----	84.00	35.22	10.18	30.63	100	346	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5854.88	53.99	111.08	-57.09	39.16	35.27	10.20	30.64	100	346	PEAK																																																																																																			
2	5871.88	54.59	106.07	-51.48	39.73	35.30	10.21	30.65	100	346	PEAK																																																																																																			
3	5924.75	53.41	68.38	-14.97	38.45	35.38	10.25	30.67	100	346	PEAK																																																																																																			
4	5928.88	55.09	68.30	-13.21	40.12	35.39	10.25	30.67	100	346	PEAK																																																																																																			
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5825.00	98.77	-----	-----	84.00	35.22	10.18	30.63	100	346	PEAK																																																																																																			
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>90.81</td> <td>-----</td> <td>-----</td> <td>76.04</td> <td>35.22</td> <td>10.18</td> <td>30.63</td> <td>100</td> <td>346</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5825.00	90.81	-----	-----	76.04	35.22	10.18	30.63	100	346	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5825.00	90.81	-----	-----	76.04	35.22	10.18	30.63	100	346	AVERAGE																																																																																																			



Mode	34																																																																																																	
	Harmonic																																																																																																	
	U-NII-3_5.725-5.85_802.11ac VHT20_CH165_5825MHz																																																																																																	
ANT	6																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>50.39</td> <td>74.00</td> <td>-23.61</td> <td>55.85</td> <td>38.78</td> <td>13.69</td> <td>57.93</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17475.00</td> <td>50.89</td> <td>68.30</td> <td>-17.41</td> <td>50.10</td> <td>41.39</td> <td>16.47</td> <td>57.07</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11650.00	50.39	74.00	-23.61	55.85	38.78	13.69	57.93	---	---	Peak	2	17475.00	50.89	68.30	-17.41	50.10	41.39	16.47	57.07	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>50.81</td> <td>74.00</td> <td>-23.19</td> <td>56.27</td> <td>38.78</td> <td>13.69</td> <td>57.93</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17475.00</td> <td>50.48</td> <td>68.30</td> <td>-17.82</td> <td>49.69</td> <td>41.39</td> <td>16.47</td> <td>57.07</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11650.00	50.81	74.00	-23.19	56.27	38.78	13.69	57.93	---	---	Peak	2	17475.00	50.48	68.30	-17.82	49.69	41.39	16.47	57.07	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11650.00	50.39	74.00	-23.61	55.85	38.78	13.69	57.93	---	---	Peak																																																																																							
2	17475.00	50.89	68.30	-17.41	50.10	41.39	16.47	57.07	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11650.00	50.81	74.00	-23.19	56.27	38.78	13.69	57.93	---	---	Peak																																																																																							
2	17475.00	50.48	68.30	-17.82	49.69	41.39	16.47	57.07	---	---	Peak																																																																																							



		35																																																																																																																						
Mode	Band Edge - L																																																																																																																							
	U-NII-3_5.725-5.85_802.11ac VHT40_CH151_5755MHz																																																																																																																							
ANT	6																																																																																																																							
Pol.	Horizontal	Fundamental																																																																																																																						
Peak																																																																																																																								
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5644.49</td> <td>54.40</td> <td>68.30</td> <td>-13.90</td> <td>39.96</td> <td>34.93</td> <td>10.07</td> <td>30.56</td> <td>100</td> <td>63</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.69</td> <td>52.80</td> <td>68.81</td> <td>-16.01</td> <td>38.34</td> <td>34.94</td> <td>10.08</td> <td>30.56</td> <td>100</td> <td>63</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5719.82</td> <td>62.29</td> <td>110.75</td> <td>-48.46</td> <td>47.71</td> <td>35.05</td> <td>10.12</td> <td>30.59</td> <td>100</td> <td>63</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.28</td> <td>60.69</td> <td>111.44</td> <td>-50.75</td> <td>46.11</td> <td>35.05</td> <td>10.12</td> <td>30.59</td> <td>100</td> <td>63</td> <td>PEAK</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5644.49	54.40	68.30	-13.90	39.96	34.93	10.07	30.56	100	63	PEAK	2	5650.69	52.80	68.81	-16.01	38.34	34.94	10.08	30.56	100	63	PEAK	3	5719.82	62.29	110.75	-48.46	47.71	35.05	10.12	30.59	100	63	PEAK	4	5720.28	60.69	111.44	-50.75	46.11	35.05	10.12	30.59	100	63	PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>101.63</td> <td>-----</td> <td>-----</td> <td>86.98</td> <td>35.11</td> <td>10.14</td> <td>30.60</td> <td>100</td> <td>63</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5755.00	101.63	-----	-----	86.98	35.11	10.14	30.60	100	63
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	5644.49	54.40	68.30	-13.90	39.96	34.93	10.07	30.56	100	63	PEAK																																																																																																													
2	5650.69	52.80	68.81	-16.01	38.34	34.94	10.08	30.56	100	63	PEAK																																																																																																													
3	5719.82	62.29	110.75	-48.46	47.71	35.05	10.12	30.59	100	63	PEAK																																																																																																													
4	5720.28	60.69	111.44	-50.75	46.11	35.05	10.12	30.59	100	63	PEAK																																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	5755.00	101.63	-----	-----	86.98	35.11	10.14	30.60	100	63	PEAK																																																																																																													
Avg	Blank																																																																																																																							
			<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>92.88</td> <td>-----</td> <td>-----</td> <td>78.23</td> <td>35.11</td> <td>10.14</td> <td>30.60</td> <td>100</td> <td>63</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5755.00	92.88	-----	-----	78.23	35.11	10.14	30.60	100	63	AVERAGE																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	5755.00	92.88	-----	-----	78.23	35.11	10.14	30.60	100	63	AVERAGE																																																																																																													



Mode	35																																																																									
	Band Edge - R																																																																									
	U-NII-3_5.725-5.85_802.11ac VHT40_CH151_5755MHz																																																																									
ANT	6																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<p>Date: 2023-06-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.45</td> <td>54.01</td> <td>112.05</td> <td>-58.04</td> <td>39.18</td> <td>35.27</td> <td>10.20</td> <td>30.64</td> <td>100</td> <td>63</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5874.54</td> <td>54.28</td> <td>105.33</td> <td>-51.05</td> <td>39.42</td> <td>35.30</td> <td>10.21</td> <td>30.65</td> <td>100</td> <td>63</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.85</td> <td>53.29</td> <td>68.31</td> <td>-15.02</td> <td>38.33</td> <td>35.38</td> <td>10.25</td> <td>30.67</td> <td>100</td> <td>63</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5935.96</td> <td>53.73</td> <td>68.30</td> <td>-14.57</td> <td>38.75</td> <td>35.40</td> <td>10.25</td> <td>30.67</td> <td>100</td> <td>63</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5854.45	54.01	112.05	-58.04	39.18	35.27	10.20	30.64	100	63	PEAK	2	5874.54	54.28	105.33	-51.05	39.42	35.30	10.21	30.65	100	63	PEAK	3	5924.85	53.29	68.31	-15.02	38.33	35.38	10.25	30.67	100	63	PEAK	4	5935.96	53.73	68.30	-14.57	38.75	35.40	10.25	30.67	100	63	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5854.45	54.01	112.05	-58.04	39.18	35.27	10.20	30.64	100	63	PEAK																																																															
2	5874.54	54.28	105.33	-51.05	39.42	35.30	10.21	30.65	100	63	PEAK																																																															
3	5924.85	53.29	68.31	-15.02	38.33	35.38	10.25	30.67	100	63	PEAK																																																															
4	5935.96	53.73	68.30	-14.57	38.75	35.40	10.25	30.67	100	63	PEAK																																																															



		35																																																																																																													
Mode		Band Edge - L																																																																																																													
		U-NII-3_5.725-5.85_802.11ac VHT40_CH151_5755MHz																																																																																																													
ANT		6																																																																																																													
Pol.		Vertical	Fundamental																																																																																																												
Peak		<p>Date: 2023-06-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5615.50</td> <td>54.81</td> <td>68.30</td> <td>-13.49</td> <td>40.42</td> <td>34.88</td> <td>10.06</td> <td>30.55</td> <td>100</td> <td>346</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.22</td> <td>52.80</td> <td>68.46</td> <td>-15.66</td> <td>38.34</td> <td>34.94</td> <td>10.08</td> <td>30.56</td> <td>100</td> <td>346</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5700.75</td> <td>53.62</td> <td>105.41</td> <td>-51.79</td> <td>39.07</td> <td>35.02</td> <td>10.11</td> <td>30.58</td> <td>100</td> <td>346</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.13</td> <td>54.66</td> <td>111.09</td> <td>-56.43</td> <td>40.08</td> <td>35.05</td> <td>10.12</td> <td>30.59</td> <td>100</td> <td>346</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5615.50	54.81	68.30	-13.49	40.42	34.88	10.06	30.55	100	346	PEAK	2	5650.22	52.80	68.46	-15.66	38.34	34.94	10.08	30.56	100	346	PEAK	3	5700.75	53.62	105.41	-51.79	39.07	35.02	10.11	30.58	100	346	PEAK	4	5720.13	54.66	111.09	-56.43	40.08	35.05	10.12	30.59	100	346	PEAK	<p>Date: 2023-06-17</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>94.24</td> <td>-----</td> <td>-----</td> <td>79.59</td> <td>35.11</td> <td>10.14</td> <td>30.60</td> <td>100</td> <td>346</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5755.00	94.24	-----	-----	79.59	35.11	10.14	30.60	100	346	PEAK
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																								
1	5615.50	54.81	68.30	-13.49	40.42	34.88	10.06	30.55	100	346	PEAK																																																																																																				
2	5650.22	52.80	68.46	-15.66	38.34	34.94	10.08	30.56	100	346	PEAK																																																																																																				
3	5700.75	53.62	105.41	-51.79	39.07	35.02	10.11	30.58	100	346	PEAK																																																																																																				
4	5720.13	54.66	111.09	-56.43	40.08	35.05	10.12	30.59	100	346	PEAK																																																																																																				
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																								
1	5755.00	94.24	-----	-----	79.59	35.11	10.14	30.60	100	346	PEAK																																																																																																				
Avg		Blank	<p>Date: 2023-06-17</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>85.53</td> <td>-----</td> <td>-----</td> <td>70.88</td> <td>35.11</td> <td>10.14</td> <td>30.60</td> <td>100</td> <td>346</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5755.00	85.53	-----	-----	70.88	35.11	10.14	30.60	100	346	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																								
1	5755.00	85.53	-----	-----	70.88	35.11	10.14	30.60	100	346	AVERAGE																																																																																																				



Mode	35																																																																									
	Band Edge - R																																																																									
	U-NII-3_5.725-5.85_802.11ac VHT40_CH151_5755MHz																																																																									
ANT	6																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.84</td> <td>52.46</td> <td>111.17</td> <td>-58.71</td> <td>37.63</td> <td>35.27</td> <td>10.20</td> <td>30.64</td> <td>100</td> <td>346</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5874.73</td> <td>53.29</td> <td>105.28</td> <td>-51.99</td> <td>38.43</td> <td>35.30</td> <td>10.21</td> <td>30.65</td> <td>100</td> <td>346</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.46</td> <td>53.11</td> <td>68.60</td> <td>-15.49</td> <td>38.16</td> <td>35.38</td> <td>10.24</td> <td>30.67</td> <td>100</td> <td>346</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5928.55</td> <td>55.43</td> <td>68.30</td> <td>-12.87</td> <td>40.46</td> <td>35.39</td> <td>10.25</td> <td>30.67</td> <td>100</td> <td>346</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5854.84	52.46	111.17	-58.71	37.63	35.27	10.20	30.64	100	346	PEAK	2	5874.73	53.29	105.28	-51.99	38.43	35.30	10.21	30.65	100	346	PEAK	3	5924.46	53.11	68.60	-15.49	38.16	35.38	10.24	30.67	100	346	PEAK	4	5928.55	55.43	68.30	-12.87	40.46	35.39	10.25	30.67	100	346	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5854.84	52.46	111.17	-58.71	37.63	35.27	10.20	30.64	100	346	PEAK																																																															
2	5874.73	53.29	105.28	-51.99	38.43	35.30	10.21	30.65	100	346	PEAK																																																															
3	5924.46	53.11	68.60	-15.49	38.16	35.38	10.24	30.67	100	346	PEAK																																																															
4	5928.55	55.43	68.30	-12.87	40.46	35.39	10.25	30.67	100	346	PEAK																																																															



Mode	35																																																																																														
	Harmonic																																																																																														
	U-NII-3_5.725-5.85_802.11ac VHT40_CH151_5755MHz																																																																																														
ANT	6																																																																																														
Pol.	Horizontal	Vertical																																																																																													
Peak Avg																																																																																															
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11510.00</td> <td>49.62</td> <td>74.00</td> <td>-24.38</td> <td>55.22</td> <td>38.60</td> <td>13.70</td> <td>57.90</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>17265.00</td> <td>50.03</td> <td>68.30</td> <td>-18.27</td> <td>49.06</td> <td>41.31</td> <td>16.52</td> <td>56.86</td> <td>--- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Apos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	11510.00	49.62	74.00	-24.38	55.22	38.60	13.70	57.90	--- Peak	2	17265.00	50.03	68.30	-18.27	49.06	41.31	16.52	56.86	--- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11510.00</td> <td>50.20</td> <td>74.00</td> <td>-23.80</td> <td>55.80</td> <td>38.60</td> <td>13.70</td> <td>57.90</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>17265.00</td> <td>49.39</td> <td>68.30</td> <td>-18.91</td> <td>48.42</td> <td>41.31</td> <td>16.52</td> <td>56.86</td> <td>--- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Apos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	11510.00	50.20	74.00	-23.80	55.80	38.60	13.70	57.90	--- Peak	2	17265.00	49.39	68.30	-18.91	48.42	41.31	16.52	56.86
	Limit	Read	Ant	Cable	Preamp	Apos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	11510.00	49.62	74.00	-24.38	55.22	38.60	13.70	57.90	--- Peak																																																																																						
2	17265.00	50.03	68.30	-18.27	49.06	41.31	16.52	56.86	--- Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	Apos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	11510.00	50.20	74.00	-23.80	55.80	38.60	13.70	57.90	--- Peak																																																																																						
2	17265.00	49.39	68.30	-18.91	48.42	41.31	16.52	56.86	--- Peak																																																																																						



Mode	36																																																																																																													
	Band Edge - L																																																																																																													
	U-NII-3_5.725-5.85_802.11ac VHT40_CH159_5795MHz																																																																																																													
ANT	6																																																																																																													
Pol.	Horizontal	Fundamental																																																																																																												
Peak	<p>Date: 2023-06-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5645.05</td> <td>54.06</td> <td>68.30</td> <td>-14.24</td> <td>39.62</td> <td>34.93</td> <td>10.07</td> <td>30.56</td> <td>100</td> <td>63</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.90</td> <td>52.83</td> <td>68.96</td> <td>-16.13</td> <td>38.37</td> <td>34.94</td> <td>10.08</td> <td>30.56</td> <td>100</td> <td>63</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5701.01</td> <td>53.01</td> <td>105.48</td> <td>-52.47</td> <td>38.46</td> <td>35.02</td> <td>10.11</td> <td>30.58</td> <td>100</td> <td>63</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.51</td> <td>53.13</td> <td>111.96</td> <td>-58.83</td> <td>38.55</td> <td>35.05</td> <td>10.12</td> <td>30.59</td> <td>100</td> <td>63</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5645.05	54.06	68.30	-14.24	39.62	34.93	10.07	30.56	100	63	PEAK	2	5650.90	52.83	68.96	-16.13	38.37	34.94	10.08	30.56	100	63	PEAK	3	5701.01	53.01	105.48	-52.47	38.46	35.02	10.11	30.58	100	63	PEAK	4	5720.51	53.13	111.96	-58.83	38.55	35.05	10.12	30.59	100	63	PEAK	<p>Date: 2023-06-17</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>101.93</td> <td>-----</td> <td>-----</td> <td>87.22</td> <td>35.17</td> <td>10.16</td> <td>30.62</td> <td>100</td> <td>63</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5795.00	101.93	-----	-----	87.22	35.17	10.16	30.62	100	63	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5645.05	54.06	68.30	-14.24	39.62	34.93	10.07	30.56	100	63	PEAK																																																																																																			
2	5650.90	52.83	68.96	-16.13	38.37	34.94	10.08	30.56	100	63	PEAK																																																																																																			
3	5701.01	53.01	105.48	-52.47	38.46	35.02	10.11	30.58	100	63	PEAK																																																																																																			
4	5720.51	53.13	111.96	-58.83	38.55	35.05	10.12	30.59	100	63	PEAK																																																																																																			
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5795.00	101.93	-----	-----	87.22	35.17	10.16	30.62	100	63	PEAK																																																																																																			
Avg	Blank	<p>Date: 2023-06-17</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>93.04</td> <td>-----</td> <td>-----</td> <td>78.33</td> <td>35.17</td> <td>10.16</td> <td>30.62</td> <td>100</td> <td>63</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5795.00	93.04	-----	-----	78.33	35.17	10.16	30.62	100	63	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5795.00	93.04	-----	-----	78.33	35.17	10.16	30.62	100	63	AVERAGE																																																																																																			



Mode	36																																																																									
	Band Edge - R																																																																									
	U-NII-3_5.725-5.85_802.11ac VHT40_CH159_5795MHz																																																																									
ANT	6																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<p>Date: 2023-06-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.83</td> <td>54.92</td> <td>111.19</td> <td>-56.27</td> <td>40.09</td> <td>35.27</td> <td>10.20</td> <td>30.64</td> <td>100</td> <td>63</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5874.98</td> <td>55.76</td> <td>105.21</td> <td>-49.45</td> <td>40.90</td> <td>35.30</td> <td>10.21</td> <td>30.65</td> <td>100</td> <td>63</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.74</td> <td>53.27</td> <td>68.40</td> <td>-15.13</td> <td>38.31</td> <td>35.38</td> <td>10.25</td> <td>30.67</td> <td>100</td> <td>63</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5938.78</td> <td>54.41</td> <td>68.30</td> <td>-13.89</td> <td>39.44</td> <td>35.39</td> <td>10.25</td> <td>30.67</td> <td>100</td> <td>63</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5854.83	54.92	111.19	-56.27	40.09	35.27	10.20	30.64	100	63	PEAK	2	5874.98	55.76	105.21	-49.45	40.90	35.30	10.21	30.65	100	63	PEAK	3	5924.74	53.27	68.40	-15.13	38.31	35.38	10.25	30.67	100	63	PEAK	4	5938.78	54.41	68.30	-13.89	39.44	35.39	10.25	30.67	100	63	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5854.83	54.92	111.19	-56.27	40.09	35.27	10.20	30.64	100	63	PEAK																																																															
2	5874.98	55.76	105.21	-49.45	40.90	35.30	10.21	30.65	100	63	PEAK																																																															
3	5924.74	53.27	68.40	-15.13	38.31	35.38	10.25	30.67	100	63	PEAK																																																															
4	5938.78	54.41	68.30	-13.89	39.44	35.39	10.25	30.67	100	63	PEAK																																																															



Mode	36																																																																																																													
	Band Edge - L																																																																																																													
	U-NII-3_5.725-5.85_802.11ac VHT40_CH159_5795MHz																																																																																																													
ANT	6																																																																																																													
Pol.	Vertical	Fundamental																																																																																																												
Peak	<p>Date: 2023-06-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5648.75</td> <td>54.27</td> <td>68.30</td> <td>-14.03</td> <td>39.82</td> <td>34.93</td> <td>10.08</td> <td>30.56</td> <td>100</td> <td>345</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5651.68</td> <td>53.15</td> <td>69.54</td> <td>-16.39</td> <td>38.69</td> <td>34.94</td> <td>10.08</td> <td>30.56</td> <td>100</td> <td>345</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5704.91</td> <td>54.28</td> <td>106.58</td> <td>-52.30</td> <td>39.73</td> <td>35.02</td> <td>10.11</td> <td>30.58</td> <td>100</td> <td>345</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.12</td> <td>52.42</td> <td>111.07</td> <td>-58.65</td> <td>37.84</td> <td>35.05</td> <td>10.12</td> <td>30.59</td> <td>100</td> <td>345</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5648.75	54.27	68.30	-14.03	39.82	34.93	10.08	30.56	100	345	PEAK	2	5651.68	53.15	69.54	-16.39	38.69	34.94	10.08	30.56	100	345	PEAK	3	5704.91	54.28	106.58	-52.30	39.73	35.02	10.11	30.58	100	345	PEAK	4	5720.12	52.42	111.07	-58.65	37.84	35.05	10.12	30.59	100	345	PEAK	<p>Date: 2023-06-17</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>93.96</td> <td>-----</td> <td>-----</td> <td>79.25</td> <td>35.17</td> <td>10.16</td> <td>30.62</td> <td>100</td> <td>345</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5795.00	93.96	-----	-----	79.25	35.17	10.16	30.62	100	345	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5648.75	54.27	68.30	-14.03	39.82	34.93	10.08	30.56	100	345	PEAK																																																																																																			
2	5651.68	53.15	69.54	-16.39	38.69	34.94	10.08	30.56	100	345	PEAK																																																																																																			
3	5704.91	54.28	106.58	-52.30	39.73	35.02	10.11	30.58	100	345	PEAK																																																																																																			
4	5720.12	52.42	111.07	-58.65	37.84	35.05	10.12	30.59	100	345	PEAK																																																																																																			
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5795.00	93.96	-----	-----	79.25	35.17	10.16	30.62	100	345	PEAK																																																																																																			
Avg	Blank	<p>Date: 2023-06-17</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>85.64</td> <td>-----</td> <td>-----</td> <td>70.93</td> <td>35.17</td> <td>10.16</td> <td>30.62</td> <td>100</td> <td>345</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5795.00	85.64	-----	-----	70.93	35.17	10.16	30.62	100	345	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5795.00	85.64	-----	-----	70.93	35.17	10.16	30.62	100	345	AVERAGE																																																																																																			



Mode	36																																																																									
	Band Edge - R																																																																									
	U-NII-3_5.725-5.85_802.11ac VHT40_CH159_5795MHz																																																																									
ANT	6																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.83</td> <td>53.00</td> <td>111.19</td> <td>-58.19</td> <td>38.17</td> <td>35.27</td> <td>10.20</td> <td>30.64</td> <td>100</td> <td>345</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5874.05</td> <td>53.73</td> <td>105.47</td> <td>-51.74</td> <td>38.87</td> <td>35.30</td> <td>10.21</td> <td>30.65</td> <td>100</td> <td>345</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.12</td> <td>53.35</td> <td>68.85</td> <td>-15.50</td> <td>38.40</td> <td>35.38</td> <td>10.24</td> <td>30.67</td> <td>100</td> <td>345</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5928.15</td> <td>54.61</td> <td>68.30</td> <td>-13.69</td> <td>39.64</td> <td>35.39</td> <td>10.25</td> <td>30.67</td> <td>100</td> <td>345</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5854.83	53.00	111.19	-58.19	38.17	35.27	10.20	30.64	100	345	PEAK	2	5874.05	53.73	105.47	-51.74	38.87	35.30	10.21	30.65	100	345	PEAK	3	5924.12	53.35	68.85	-15.50	38.40	35.38	10.24	30.67	100	345	PEAK	4	5928.15	54.61	68.30	-13.69	39.64	35.39	10.25	30.67	100	345	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5854.83	53.00	111.19	-58.19	38.17	35.27	10.20	30.64	100	345	PEAK																																																															
2	5874.05	53.73	105.47	-51.74	38.87	35.30	10.21	30.65	100	345	PEAK																																																															
3	5924.12	53.35	68.85	-15.50	38.40	35.38	10.24	30.67	100	345	PEAK																																																															
4	5928.15	54.61	68.30	-13.69	39.64	35.39	10.25	30.67	100	345	PEAK																																																															



		37																																																																																																																				
Mode	Band Edge - L																																																																																																																					
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																																					
ANT	6																																																																																																																					
Pol.	Horizontal	Fundamental																																																																																																																				
Peak																																																																																																																						
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5611.03</td> <td>54.38</td> <td>68.30</td> <td>-13.92</td> <td>40.00</td> <td>34.87</td> <td>10.06</td> <td>30.55</td> <td>100</td> <td>80</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.58</td> <td>53.04</td> <td>68.73</td> <td>-15.69</td> <td>38.58</td> <td>34.94</td> <td>10.08</td> <td>30.56</td> <td>100</td> <td>80</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5700.63</td> <td>58.86</td> <td>105.38</td> <td>-46.52</td> <td>44.31</td> <td>35.02</td> <td>10.11</td> <td>30.58</td> <td>100</td> <td>80</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.05</td> <td>59.38</td> <td>110.91</td> <td>-51.53</td> <td>44.80</td> <td>35.05</td> <td>10.12</td> <td>30.59</td> <td>100</td> <td>80</td> <td>PEAK</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5611.03	54.38	68.30	-13.92	40.00	34.87	10.06	30.55	100	80	PEAK	2	5650.58	53.04	68.73	-15.69	38.58	34.94	10.08	30.56	100	80	PEAK	3	5700.63	58.86	105.38	-46.52	44.31	35.02	10.11	30.58	100	80	PEAK	4	5720.05	59.38	110.91	-51.53	44.80	35.05	10.12	30.59	100	80	PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>97.99</td> <td>-----</td> <td>-----</td> <td>83.31</td> <td>35.14</td> <td>10.15</td> <td>30.61</td> <td>100</td> <td>80</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	97.99	-----	-----	83.31	35.14	10.15	30.61	100	80
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	5611.03	54.38	68.30	-13.92	40.00	34.87	10.06	30.55	100	80	PEAK																																																																																																											
2	5650.58	53.04	68.73	-15.69	38.58	34.94	10.08	30.56	100	80	PEAK																																																																																																											
3	5700.63	58.86	105.38	-46.52	44.31	35.02	10.11	30.58	100	80	PEAK																																																																																																											
4	5720.05	59.38	110.91	-51.53	44.80	35.05	10.12	30.59	100	80	PEAK																																																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	5775.00	97.99	-----	-----	83.31	35.14	10.15	30.61	100	80	PEAK																																																																																																											
Avg	Blank																																																																																																																					
			<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>90.44</td> <td>-----</td> <td>-----</td> <td>75.76</td> <td>35.14</td> <td>10.15</td> <td>30.61</td> <td>100</td> <td>80</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	90.44	-----	-----	75.76	35.14	10.15	30.61	100	80	AVERAGE																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	5775.00	90.44	-----	-----	75.76	35.14	10.15	30.61	100	80	AVERAGE																																																																																																											



Mode	37																																																																									
	Band Edge - R																																																																									
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																									
ANT	6																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<p>Date: 2023-06-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.80</td> <td>57.98</td> <td>111.26</td> <td>-53.28</td> <td>43.15</td> <td>35.27</td> <td>10.20</td> <td>30.64</td> <td>100</td> <td>80</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5874.23</td> <td>58.87</td> <td>105.42</td> <td>-46.55</td> <td>44.01</td> <td>35.30</td> <td>10.21</td> <td>30.65</td> <td>100</td> <td>80</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.80</td> <td>53.54</td> <td>68.35</td> <td>-14.81</td> <td>38.58</td> <td>35.38</td> <td>10.25</td> <td>30.67</td> <td>100</td> <td>80</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5949.48</td> <td>54.71</td> <td>68.30</td> <td>-13.59</td> <td>39.71</td> <td>35.42</td> <td>10.26</td> <td>30.68</td> <td>100</td> <td>80</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5854.80	57.98	111.26	-53.28	43.15	35.27	10.20	30.64	100	80	PEAK	2	5874.23	58.87	105.42	-46.55	44.01	35.30	10.21	30.65	100	80	PEAK	3	5924.80	53.54	68.35	-14.81	38.58	35.38	10.25	30.67	100	80	PEAK	4	5949.48	54.71	68.30	-13.59	39.71	35.42	10.26	30.68	100	80	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5854.80	57.98	111.26	-53.28	43.15	35.27	10.20	30.64	100	80	PEAK																																																															
2	5874.23	58.87	105.42	-46.55	44.01	35.30	10.21	30.65	100	80	PEAK																																																															
3	5924.80	53.54	68.35	-14.81	38.58	35.38	10.25	30.67	100	80	PEAK																																																															
4	5949.48	54.71	68.30	-13.59	39.71	35.42	10.26	30.68	100	80	PEAK																																																															



	37																																																																																																													
Mode	Band Edge - L																																																																																																													
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																													
ANT	6																																																																																																													
Pol.	Vertical	Fundamental																																																																																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5637.28</td> <td>54.78</td> <td>68.30</td> <td>-13.52</td> <td>40.36</td> <td>34.91</td> <td>10.07</td> <td>30.56</td> <td>100</td> <td>346</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.40</td> <td>52.99</td> <td>68.60</td> <td>-15.61</td> <td>38.53</td> <td>34.94</td> <td>10.08</td> <td>30.56</td> <td>100</td> <td>346</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5701.33</td> <td>54.80</td> <td>105.57</td> <td>-50.77</td> <td>40.25</td> <td>35.02</td> <td>10.11</td> <td>30.58</td> <td>100</td> <td>346</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.23</td> <td>56.24</td> <td>111.31</td> <td>-55.07</td> <td>41.66</td> <td>35.05</td> <td>10.12</td> <td>30.59</td> <td>100</td> <td>346</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5637.28	54.78	68.30	-13.52	40.36	34.91	10.07	30.56	100	346	PEAK	2	5650.40	52.99	68.60	-15.61	38.53	34.94	10.08	30.56	100	346	PEAK	3	5701.33	54.80	105.57	-50.77	40.25	35.02	10.11	30.58	100	346	PEAK	4	5720.23	56.24	111.31	-55.07	41.66	35.05	10.12	30.59	100	346	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>91.86</td> <td>-----</td> <td>-----</td> <td>77.18</td> <td>35.14</td> <td>10.15</td> <td>30.61</td> <td>100</td> <td>346</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5775.00	91.86	-----	-----	77.18	35.14	10.15	30.61	100	346	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5637.28	54.78	68.30	-13.52	40.36	34.91	10.07	30.56	100	346	PEAK																																																																																																			
2	5650.40	52.99	68.60	-15.61	38.53	34.94	10.08	30.56	100	346	PEAK																																																																																																			
3	5701.33	54.80	105.57	-50.77	40.25	35.02	10.11	30.58	100	346	PEAK																																																																																																			
4	5720.23	56.24	111.31	-55.07	41.66	35.05	10.12	30.59	100	346	PEAK																																																																																																			
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5775.00	91.86	-----	-----	77.18	35.14	10.15	30.61	100	346	PEAK																																																																																																			
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>83.97</td> <td>-----</td> <td>-----</td> <td>69.29</td> <td>35.14</td> <td>10.15</td> <td>30.61</td> <td>100</td> <td>346</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5775.00	83.97	-----	-----	69.29	35.14	10.15	30.61	100	346	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5775.00	83.97	-----	-----	69.29	35.14	10.15	30.61	100	346	AVERAGE																																																																																																			





Mode	37																																																																									
	Band Edge - R																																																																									
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																									
ANT	6																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<p>Date: 2023-06-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.98</td> <td>53.34</td> <td>110.86</td> <td>-57.52</td> <td>38.51</td> <td>35.27</td> <td>10.20</td> <td>30.64</td> <td>100</td> <td>346</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5874.93</td> <td>54.51</td> <td>105.22</td> <td>-50.71</td> <td>39.65</td> <td>35.30</td> <td>10.21</td> <td>30.65</td> <td>100</td> <td>346</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.98</td> <td>53.10</td> <td>68.22</td> <td>-15.12</td> <td>38.14</td> <td>35.38</td> <td>10.25</td> <td>30.67</td> <td>100</td> <td>346</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5933.20</td> <td>54.71</td> <td>68.30</td> <td>-13.59</td> <td>39.74</td> <td>35.39</td> <td>10.25</td> <td>30.67</td> <td>100</td> <td>346</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5854.98	53.34	110.86	-57.52	38.51	35.27	10.20	30.64	100	346	PEAK	2	5874.93	54.51	105.22	-50.71	39.65	35.30	10.21	30.65	100	346	PEAK	3	5924.98	53.10	68.22	-15.12	38.14	35.38	10.25	30.67	100	346	PEAK	4	5933.20	54.71	68.30	-13.59	39.74	35.39	10.25	30.67	100	346	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5854.98	53.34	110.86	-57.52	38.51	35.27	10.20	30.64	100	346	PEAK																																																															
2	5874.93	54.51	105.22	-50.71	39.65	35.30	10.21	30.65	100	346	PEAK																																																															
3	5924.98	53.10	68.22	-15.12	38.14	35.38	10.25	30.67	100	346	PEAK																																																															
4	5933.20	54.71	68.30	-13.59	39.74	35.39	10.25	30.67	100	346	PEAK																																																															



Mode	42																																																																																																																																																																																																																
	LF																																																																																																																																																																																																																
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz																																																																																																																																																																																																																
ANT	6																																																																																																																																																																																																																
Pol.	Horizontal	Vertical																																																																																																																																																																																																															
Peak																																																																																																																																																																																																																	
	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>55.22</td><td>19.88</td><td>40.00</td><td>-20.12</td><td>30.52</td><td>20.10</td><td>0.86</td><td>31.60</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>142.52</td><td>19.70</td><td>43.50</td><td>-23.80</td><td>30.37</td><td>19.24</td><td>1.52</td><td>31.43</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>329.73</td><td>21.15</td><td>46.00</td><td>-24.85</td><td>29.44</td><td>20.58</td><td>2.47</td><td>31.34</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>451.95</td><td>23.95</td><td>46.00</td><td>-22.05</td><td>29.36</td><td>23.18</td><td>2.89</td><td>31.48</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>600.36</td><td>27.72</td><td>46.00</td><td>-18.28</td><td>30.05</td><td>25.78</td><td>3.49</td><td>31.60</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>844.80</td><td>30.22</td><td>46.00</td><td>-15.78</td><td>28.99</td><td>28.58</td><td>4.04</td><td>31.39</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	55.22	19.88	40.00	-20.12	30.52	20.10	0.86	31.60	---	---	---	Peak	2	142.52	19.70	43.50	-23.80	30.37	19.24	1.52	31.43	---	---	---	Peak	3	329.73	21.15	46.00	-24.85	29.44	20.58	2.47	31.34	---	---	---	Peak	4	451.95	23.95	46.00	-22.05	29.36	23.18	2.89	31.48	---	---	---	Peak	5	600.36	27.72	46.00	-18.28	30.05	25.78	3.49	31.60	---	---	---	Peak	6	844.80	30.22	46.00	-15.78	28.99	28.58	4.04	31.39	---	---	---	Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>35.82</td><td>26.27</td><td>40.00</td><td>-13.73</td><td>37.91</td><td>19.27</td><td>0.59</td><td>31.50</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>53.28</td><td>27.75</td><td>40.00</td><td>-12.25</td><td>38.32</td><td>20.18</td><td>0.84</td><td>31.59</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>142.52</td><td>23.85</td><td>43.50</td><td>-19.65</td><td>34.52</td><td>19.24</td><td>1.52</td><td>31.43</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>255.04</td><td>19.55</td><td>46.00</td><td>-26.45</td><td>30.72</td><td>18.34</td><td>2.16</td><td>31.67</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>453.89</td><td>24.19</td><td>46.00</td><td>-21.81</td><td>29.54</td><td>23.22</td><td>2.90</td><td>31.47</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>683.78</td><td>27.67</td><td>46.00</td><td>-18.33</td><td>28.90</td><td>26.70</td><td>3.67</td><td>31.60</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	35.82	26.27	40.00	-13.73	37.91	19.27	0.59	31.50	---	---	---	Peak	2	53.28	27.75	40.00	-12.25	38.32	20.18	0.84	31.59	---	---	---	Peak	3	142.52	23.85	43.50	-19.65	34.52	19.24	1.52	31.43	---	---	---	Peak	4	255.04	19.55	46.00	-26.45	30.72	18.34	2.16	31.67	---	---	---	Peak	5	453.89	24.19	46.00	-21.81	29.54	23.22	2.90	31.47	---	---	---	Peak	6	683.78	27.67	46.00	-18.33	28.90	26.70	3.67	31.60	---	---	---
Peak	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																							
1	55.22	19.88	40.00	-20.12	30.52	20.10	0.86	31.60	---	---	---	Peak																																																																																																																																																																																																					
2	142.52	19.70	43.50	-23.80	30.37	19.24	1.52	31.43	---	---	---	Peak																																																																																																																																																																																																					
3	329.73	21.15	46.00	-24.85	29.44	20.58	2.47	31.34	---	---	---	Peak																																																																																																																																																																																																					
4	451.95	23.95	46.00	-22.05	29.36	23.18	2.89	31.48	---	---	---	Peak																																																																																																																																																																																																					
5	600.36	27.72	46.00	-18.28	30.05	25.78	3.49	31.60	---	---	---	Peak																																																																																																																																																																																																					
6	844.80	30.22	46.00	-15.78	28.99	28.58	4.04	31.39	---	---	---	Peak																																																																																																																																																																																																					
Peak	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																							
1	35.82	26.27	40.00	-13.73	37.91	19.27	0.59	31.50	---	---	---	Peak																																																																																																																																																																																																					
2	53.28	27.75	40.00	-12.25	38.32	20.18	0.84	31.59	---	---	---	Peak																																																																																																																																																																																																					
3	142.52	23.85	43.50	-19.65	34.52	19.24	1.52	31.43	---	---	---	Peak																																																																																																																																																																																																					
4	255.04	19.55	46.00	-26.45	30.72	18.34	2.16	31.67	---	---	---	Peak																																																																																																																																																																																																					
5	453.89	24.19	46.00	-21.81	29.54	23.22	2.90	31.47	---	---	---	Peak																																																																																																																																																																																																					
6	683.78	27.67	46.00	-18.33	28.90	26.70	3.67	31.60	---	---	---	Peak																																																																																																																																																																																																					



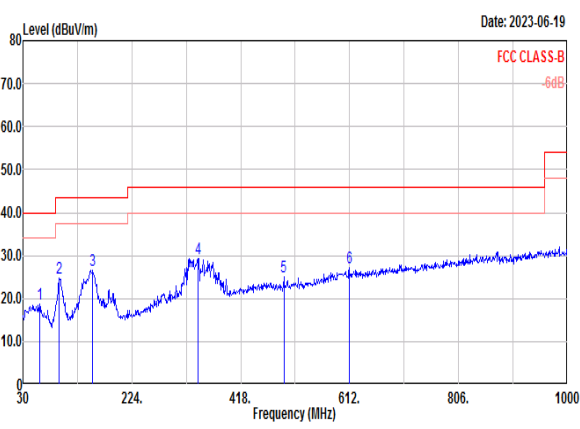
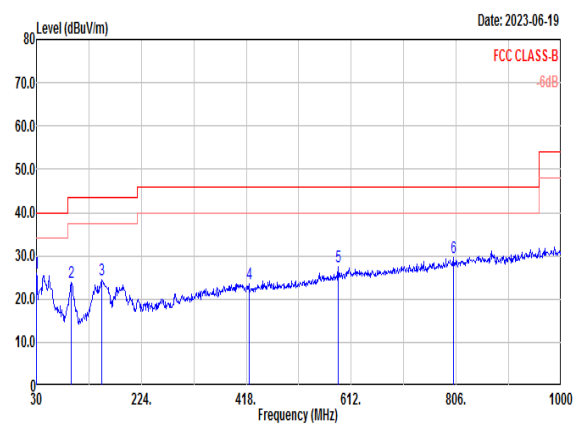


Mode	43																																																																																																																																																																																																																	
	LF																																																																																																																																																																																																																	
	U-NII-3_5.725-5.85_802.11ac VHT40_CH151_5755MHz																																																																																																																																																																																																																	
ANT	6																																																																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																																																																
Peak	 <p>Date: 2023-06-19 FCC CLASS-B -6dB</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>59.10</td><td>18.59</td><td>40.00</td><td>-21.41</td><td>29.63</td><td>19.65</td><td>0.91</td><td>31.60</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>94.99</td><td>24.69</td><td>43.50</td><td>-18.81</td><td>41.11</td><td>14.00</td><td>1.17</td><td>31.59</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>154.16</td><td>26.72</td><td>43.50</td><td>-16.78</td><td>37.25</td><td>19.29</td><td>1.57</td><td>31.39</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>341.37</td><td>29.38</td><td>46.00</td><td>-16.62</td><td>37.42</td><td>20.78</td><td>2.50</td><td>31.32</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>494.63</td><td>25.02</td><td>46.00</td><td>-20.98</td><td>29.53</td><td>23.73</td><td>2.99</td><td>31.23</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>611.03</td><td>27.04</td><td>46.00</td><td>-18.96</td><td>29.17</td><td>25.92</td><td>3.51</td><td>31.56</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	59.10	18.59	40.00	-21.41	29.63	19.65	0.91	31.60	---	---	---	Peak	2	94.99	24.69	43.50	-18.81	41.11	14.00	1.17	31.59	---	---	---	Peak	3	154.16	26.72	43.50	-16.78	37.25	19.29	1.57	31.39	---	---	---	Peak	4	341.37	29.38	46.00	-16.62	37.42	20.78	2.50	31.32	---	---	---	Peak	5	494.63	25.02	46.00	-20.98	29.53	23.73	2.99	31.23	---	---	---	Peak	6	611.03	27.04	46.00	-18.96	29.17	25.92	3.51	31.56	---	---	---	Peak	 <p>Date: 2023-06-19 FCC CLASS-B -6dB</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>30.00</td><td>25.84</td><td>40.00</td><td>-14.16</td><td>37.79</td><td>18.85</td><td>0.50</td><td>31.30</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>94.02</td><td>23.73</td><td>43.50</td><td>-19.77</td><td>40.17</td><td>13.98</td><td>1.16</td><td>31.58</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>151.25</td><td>24.38</td><td>43.50</td><td>-19.12</td><td>34.92</td><td>19.30</td><td>1.56</td><td>31.40</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>422.85</td><td>23.54</td><td>46.00</td><td>-22.46</td><td>29.69</td><td>22.53</td><td>2.77</td><td>31.45</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>587.75</td><td>27.44</td><td>46.00</td><td>-18.56</td><td>29.96</td><td>25.57</td><td>3.44</td><td>31.53</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>801.15</td><td>29.57</td><td>46.00</td><td>-16.43</td><td>28.68</td><td>28.24</td><td>3.95</td><td>31.30</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	30.00	25.84	40.00	-14.16	37.79	18.85	0.50	31.30	---	---	---	Peak	2	94.02	23.73	43.50	-19.77	40.17	13.98	1.16	31.58	---	---	---	Peak	3	151.25	24.38	43.50	-19.12	34.92	19.30	1.56	31.40	---	---	---	Peak	4	422.85	23.54	46.00	-22.46	29.69	22.53	2.77	31.45	---	---	---	Peak	5	587.75	27.44	46.00	-18.56	29.96	25.57	3.44	31.53	---	---	---	Peak	6	801.15	29.57	46.00	-16.43	28.68	28.24	3.95	31.30	---	---	---	Peak
	Peak	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																							
1	59.10	18.59	40.00	-21.41	29.63	19.65	0.91	31.60	---	---	---	Peak																																																																																																																																																																																																						
2	94.99	24.69	43.50	-18.81	41.11	14.00	1.17	31.59	---	---	---	Peak																																																																																																																																																																																																						
3	154.16	26.72	43.50	-16.78	37.25	19.29	1.57	31.39	---	---	---	Peak																																																																																																																																																																																																						
4	341.37	29.38	46.00	-16.62	37.42	20.78	2.50	31.32	---	---	---	Peak																																																																																																																																																																																																						
5	494.63	25.02	46.00	-20.98	29.53	23.73	2.99	31.23	---	---	---	Peak																																																																																																																																																																																																						
6	611.03	27.04	46.00	-18.96	29.17	25.92	3.51	31.56	---	---	---	Peak																																																																																																																																																																																																						
Peak	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																							
1	30.00	25.84	40.00	-14.16	37.79	18.85	0.50	31.30	---	---	---	Peak																																																																																																																																																																																																						
2	94.02	23.73	43.50	-19.77	40.17	13.98	1.16	31.58	---	---	---	Peak																																																																																																																																																																																																						
3	151.25	24.38	43.50	-19.12	34.92	19.30	1.56	31.40	---	---	---	Peak																																																																																																																																																																																																						
4	422.85	23.54	46.00	-22.46	29.69	22.53	2.77	31.45	---	---	---	Peak																																																																																																																																																																																																						
5	587.75	27.44	46.00	-18.56	29.96	25.57	3.44	31.53	---	---	---	Peak																																																																																																																																																																																																						
6	801.15	29.57	46.00	-16.43	28.68	28.24	3.95	31.30	---	---	---	Peak																																																																																																																																																																																																						







Co-location

WIFI 802. 11ac_VHT80_Ch106+LTE Band 13 Link (Band Edge @ 3m)

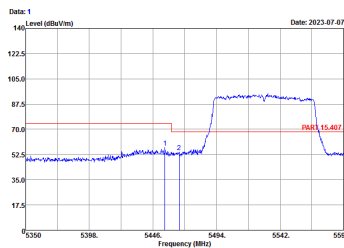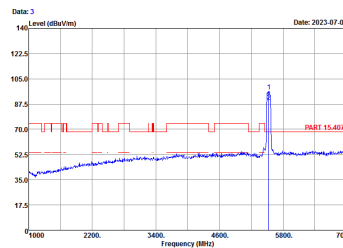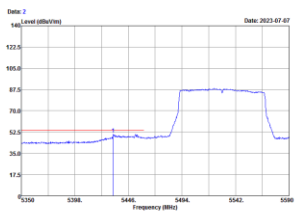
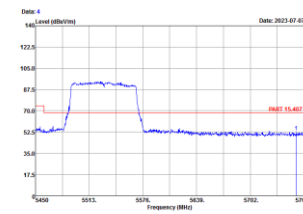
WIFI	UNII 2C 5470-5725MHzMHz Band Edge @ 3m																																																																																																			
ANT	11ac_VHT80_Ch106+LTE Band 13 Link																																																																																																			
6	Horizontal	Fundamental																																																																																																		
Peak	 <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>Read</th> <th>Res</th> <th>Corr</th> <th>Pramp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5455.12</td> <td>57.35</td> <td>-16.65</td> <td>74.00</td> <td>43.85</td> <td>34.66</td> <td>9.88</td> <td>30.24</td> <td>100</td> <td>80 Peak</td> </tr> <tr> <td>2</td> <td>5465.92</td> <td>54.38</td> <td>-13.92</td> <td>68.30</td> <td>48.82</td> <td>34.67</td> <td>9.92</td> <td>30.23</td> <td>100</td> <td>80 Peak</td> </tr> </tbody> </table>	Over	Limit	Read	Res	Corr	Pramp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Line	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	1	5455.12	57.35	-16.65	74.00	43.85	34.66	9.88	30.24	100	80 Peak	2	5465.92	54.38	-13.92	68.30	48.82	34.67	9.92	30.23	100	80 Peak	 <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>Read</th> <th>Res</th> <th>Corr</th> <th>Pramp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>96.41</td> <td>28.11</td> <td>68.30</td> <td>81.93</td> <td>34.73</td> <td>9.97</td> <td>30.22</td> <td>100</td> <td>80 Peak</td> </tr> <tr> <td>2</td> <td>5530.00</td> <td>85.26</td> <td>.....</td> <td>74.78</td> <td>34.73</td> <td>9.97</td> <td>30.22</td> <td>100</td> <td>80</td> <td>Average</td> </tr> </tbody> </table>	Over	Limit	Read	Res	Corr	Pramp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Line	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	1	5530.00	96.41	28.11	68.30	81.93	34.73	9.97	30.22	100	80 Peak	2	5530.00	85.26	74.78	34.73	9.97	30.22	100	80	Average
Over	Limit	Read	Res	Corr	Pramp	A/Pos	T/Pos	Remark																																																																																												
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																																													
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																																												
1	5455.12	57.35	-16.65	74.00	43.85	34.66	9.88	30.24	100	80 Peak																																																																																										
2	5465.92	54.38	-13.92	68.30	48.82	34.67	9.92	30.23	100	80 Peak																																																																																										
Over	Limit	Read	Res	Corr	Pramp	A/Pos	T/Pos	Remark																																																																																												
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																																													
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																																												
1	5530.00	96.41	28.11	68.30	81.93	34.73	9.97	30.22	100	80 Peak																																																																																										
2	5530.00	85.26	74.78	34.73	9.97	30.22	100	80	Average																																																																																										
Avg.	 <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>Read</th> <th>Res</th> <th>Corr</th> <th>Pramp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5432.32</td> <td>58.55</td> <td>-3.45</td> <td>34.80</td> <td>38.27</td> <td>34.65</td> <td>9.88</td> <td>30.25</td> <td>100</td> <td>80 Average</td> </tr> </tbody> </table>	Over	Limit	Read	Res	Corr	Pramp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Line	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	1	5432.32	58.55	-3.45	34.80	38.27	34.65	9.88	30.25	100	80 Average	 <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>Read</th> <th>Res</th> <th>Corr</th> <th>Pramp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5705.87</td> <td>52.72</td> <td>-15.58</td> <td>68.30</td> <td>37.82</td> <td>35.11</td> <td>10.14</td> <td>30.35</td> <td>100</td> <td>80 Peak</td> </tr> </tbody> </table>	Over	Limit	Read	Res	Corr	Pramp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Line	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	1	5705.87	52.72	-15.58	68.30	37.82	35.11	10.14	30.35	100	80 Peak																						
Over	Limit	Read	Res	Corr	Pramp	A/Pos	T/Pos	Remark																																																																																												
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																																													
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																																												
1	5432.32	58.55	-3.45	34.80	38.27	34.65	9.88	30.25	100	80 Average																																																																																										
Over	Limit	Read	Res	Corr	Pramp	A/Pos	T/Pos	Remark																																																																																												
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																																													
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																																												
1	5705.87	52.72	-15.58	68.30	37.82	35.11	10.14	30.35	100	80 Peak																																																																																										

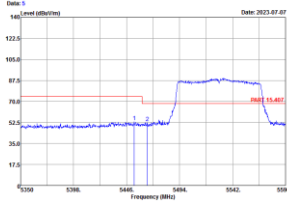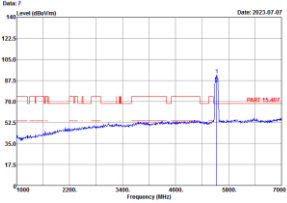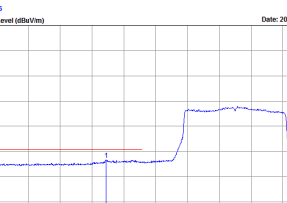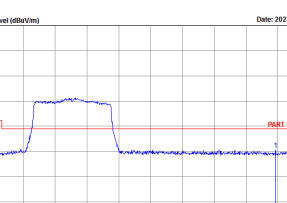

WIFI	UNII 2C 5470-5725MHzMHz Band Edge @ 3m																																																																																	
ANT	11ac_VHT80_Ch106+LTE Band 13 Link																																																																																	
6	Vertical	Fundamental																																																																																
Peak	 <p>Date: 5 Date: 2023-07-07</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5402.90</td> <td>52.91</td> <td>-21.89</td> <td>74.00</td> <td>30.61</td> <td>34.65</td> <td>9.88 30.25 100 122 Peak</td> </tr> <tr> <td>2</td> <td>5408.72</td> <td>52.51</td> <td>-18.89</td> <td>68.00</td> <td>37.85</td> <td>34.65</td> <td>9.88 30.25 100 122 Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1	5402.90	52.91	-21.89	74.00	30.61	34.65	9.88 30.25 100 122 Peak	2	5408.72	52.51	-18.89	68.00	37.85	34.65	9.88 30.25 100 122 Peak	 <p>Date: 7 Date: 2023-07-07</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5538.00</td> <td>60.11</td> <td>-23.81</td> <td>68.30</td> <td>77.63</td> <td>34.71</td> <td>9.97 30.22 100 122 Peak</td> </tr> <tr> <td>2</td> <td>5538.00</td> <td>60.00</td> <td>-23.81</td> <td>68.30</td> <td>78.16</td> <td>34.71</td> <td>9.97 30.22 100 122 Average</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1	5538.00	60.11	-23.81	68.30	77.63	34.71	9.97 30.22 100 122 Peak	2	5538.00	60.00	-23.81	68.30	78.16	34.71	9.97 30.22 100 122 Average
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																											
Freq	Level	Line	Level	Factor	Loss	Factor																																																																												
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																																											
1	5402.90	52.91	-21.89	74.00	30.61	34.65	9.88 30.25 100 122 Peak																																																																											
2	5408.72	52.51	-18.89	68.00	37.85	34.65	9.88 30.25 100 122 Peak																																																																											
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																											
Freq	Level	Line	Level	Factor	Loss	Factor																																																																												
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																																											
1	5538.00	60.11	-23.81	68.30	77.63	34.71	9.97 30.22 100 122 Peak																																																																											
2	5538.00	60.00	-23.81	68.30	78.16	34.71	9.97 30.22 100 122 Average																																																																											
Avg.	 <p>Date: 6 Date: 2023-07-07</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5432.56</td> <td>46.66</td> <td>-7.34</td> <td>54.00</td> <td>32.38</td> <td>34.65</td> <td>9.88 30.25 100 122 Average</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1	5432.56	46.66	-7.34	54.00	32.38	34.65	9.88 30.25 100 122 Average	 <p>Date: 8 Date: 2023-07-07</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5711.38</td> <td>53.81</td> <td>-14.49</td> <td>68.30</td> <td>38.97</td> <td>35.06</td> <td>10.12 30.34 100 122 Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1	5711.38	53.81	-14.49	68.30	38.97	35.06	10.12 30.34 100 122 Peak																
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																											
Freq	Level	Line	Level	Factor	Loss	Factor																																																																												
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																																											
1	5432.56	46.66	-7.34	54.00	32.38	34.65	9.88 30.25 100 122 Average																																																																											
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																											
Freq	Level	Line	Level	Factor	Loss	Factor																																																																												
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																																											
1	5711.38	53.81	-14.49	68.30	38.97	35.06	10.12 30.34 100 122 Peak																																																																											



11ac_VHT80_Ch106+LTE Band 13 Link (Harmonic @ 3m)

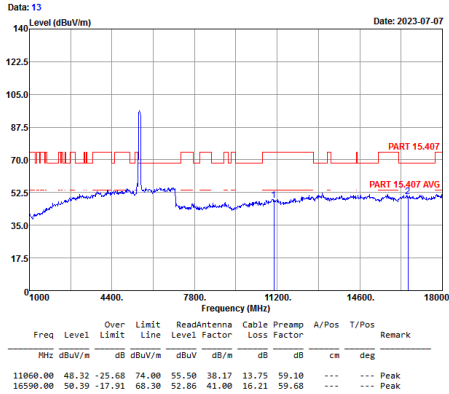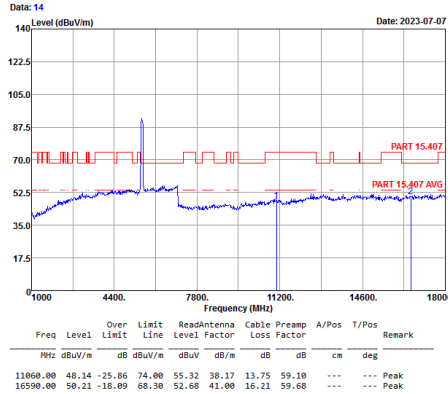WIFI	UNII 2C 5470-5725MHzMHz Harmonic @ 3m																																																																																	
ANT	11ac_VHT80_Ch106+LTE Band 13 Link																																																																																	
6	Horizontal	Vertical																																																																																
Peak Avg.	 <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1 11860.00</td> <td>48.32</td> <td>-25.68</td> <td>74.00</td> <td>55.58</td> <td>38.17</td> <td>13.75</td> <td>59.18 --- --- Peak</td> </tr> <tr> <td>2 16590.00</td> <td>50.39</td> <td>-17.91</td> <td>68.30</td> <td>52.86</td> <td>41.00</td> <td>16.21</td> <td>59.68 --- --- Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dB	dB/m	dB	cm deg	1 11860.00	48.32	-25.68	74.00	55.58	38.17	13.75	59.18 --- --- Peak	2 16590.00	50.39	-17.91	68.30	52.86	41.00	16.21	59.68 --- --- Peak	 <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1 11860.00</td> <td>48.14</td> <td>-25.86</td> <td>74.00</td> <td>55.32</td> <td>38.17</td> <td>13.75</td> <td>59.18 --- --- Peak</td> </tr> <tr> <td>2 16590.00</td> <td>50.21</td> <td>-18.09</td> <td>68.30</td> <td>52.68</td> <td>41.00</td> <td>16.21</td> <td>59.68 --- --- Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dB	dB/m	dB	cm deg	1 11860.00	48.14	-25.86	74.00	55.32	38.17	13.75	59.18 --- --- Peak	2 16590.00	50.21	-18.09	68.30	52.68	41.00	16.21	59.68 --- --- Peak
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																											
Freq	Level	Limit	Level	Factor	Loss	Factor																																																																												
MHz	dBuV/m	dB	dBuV/m	dB	dB/m	dB	cm deg																																																																											
1 11860.00	48.32	-25.68	74.00	55.58	38.17	13.75	59.18 --- --- Peak																																																																											
2 16590.00	50.39	-17.91	68.30	52.86	41.00	16.21	59.68 --- --- Peak																																																																											
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																											
Freq	Level	Limit	Level	Factor	Loss	Factor																																																																												
MHz	dBuV/m	dB	dBuV/m	dB	dB/m	dB	cm deg																																																																											
1 11860.00	48.14	-25.86	74.00	55.32	38.17	13.75	59.18 --- --- Peak																																																																											
2 16590.00	50.21	-18.09	68.30	52.68	41.00	16.21	59.68 --- --- Peak																																																																											



Straddle Channel

UNII-2C - Straddle Channel

WIFI 802.11ac VHT20 (Band Edge @ 3m)

WIFI	UNII-2C Straddle Channel Band Edge @ 3m																																																							
ANT	802.11ac VHT20 CH144 5720MHz - L																																																							
6	Horizontal	Fundamental																																																						
Peak	<table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>5424.25</td> <td>50.15</td> <td>74.00</td> <td>-23.85</td> <td>30.11</td> <td>34.64</td> <td>9.84</td> <td>30.50</td> <td>100</td> <td>65</td> <td>Peak</td> </tr> <tr> <td>5462.75</td> <td>50.05</td> <td>68.30</td> <td>-18.25</td> <td>35.98</td> <td>34.67</td> <td>9.90</td> <td>30.50</td> <td>100</td> <td>65</td> <td>Peak</td> </tr> <tr> <td>5720.00</td> <td>105.13</td> <td>70.00</td> <td>35.13</td> <td>35.05</td> <td>30.12</td> <td>30.50</td> <td>100</td> <td>65</td> <td>Peak</td> </tr> <tr> <td>5880.75</td> <td>52.34</td> <td>68.30</td> <td>-15.96</td> <td>37.46</td> <td>35.31</td> <td>10.22</td> <td>30.65</td> <td>100</td> <td>65</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	5424.25	50.15	74.00	-23.85	30.11	34.64	9.84	30.50	100	65	Peak	5462.75	50.05	68.30	-18.25	35.98	34.67	9.90	30.50	100	65	Peak	5720.00	105.13	70.00	35.13	35.05	30.12	30.50	100	65	Peak	5880.75	52.34	68.30	-15.96	37.46	35.31	10.22	30.65	100	65	Peak	Left blank
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																														
5424.25	50.15	74.00	-23.85	30.11	34.64	9.84	30.50	100	65	Peak																																														
5462.75	50.05	68.30	-18.25	35.98	34.67	9.90	30.50	100	65	Peak																																														
5720.00	105.13	70.00	35.13	35.05	30.12	30.50	100	65	Peak																																															
5880.75	52.34	68.30	-15.96	37.46	35.31	10.22	30.65	100	65	Peak																																														
Avg.	<table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>5424.25</td> <td>42.13</td> <td>54.00</td> <td>-11.87</td> <td>36.48</td> <td>34.66</td> <td>9.89</td> <td>30.50</td> <td>100</td> <td>65</td> <td>Average</td> </tr> <tr> <td>5720.00</td> <td>94.17</td> <td>70.00</td> <td>24.17</td> <td>35.05</td> <td>30.12</td> <td>30.50</td> <td>100</td> <td>65</td> <td>Average</td> </tr> </tbody> </table>	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	5424.25	42.13	54.00	-11.87	36.48	34.66	9.89	30.50	100	65	Average	5720.00	94.17	70.00	24.17	35.05	30.12	30.50	100	65	Average	Left blank																						
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																														
5424.25	42.13	54.00	-11.87	36.48	34.66	9.89	30.50	100	65	Average																																														
5720.00	94.17	70.00	24.17	35.05	30.12	30.50	100	65	Average																																															



WIFI	UNII-2C Straddle Channel Band Edge @ 3m																																																	
ANT	802.11ac VHT20 CH144 5720MHz - L																																																	
6	Vertical	Fundamental																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> </thead> <tbody> <tr> <td>5420.00</td> <td>49.94</td> <td>75.00</td> <td>-24.06</td> <td>35.95</td> <td>34.03</td> <td>9.86</td> <td>30.50</td> </tr> <tr> <td>5440.50</td> <td>49.93</td> <td>68.30</td> <td>-18.37</td> <td>31.56</td> <td>34.67</td> <td>9.90</td> <td>30.50</td> </tr> <tr> <td>5720.00</td> <td>85.64</td> <td>87.50</td> <td>-1.86</td> <td>75.68</td> <td>10.82</td> <td>10.86</td> <td>30.50</td> </tr> <tr> <td>5900.00</td> <td>51.66</td> <td>68.30</td> <td>-16.64</td> <td>35.02</td> <td>33.34</td> <td>10.23</td> <td>30.66</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	5420.00	49.94	75.00	-24.06	35.95	34.03	9.86	30.50	5440.50	49.93	68.30	-18.37	31.56	34.67	9.90	30.50	5720.00	85.64	87.50	-1.86	75.68	10.82	10.86	30.50	5900.00	51.66	68.30	-16.64	35.02	33.34	10.23	30.66	Left blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																											
5420.00	49.94	75.00	-24.06	35.95	34.03	9.86	30.50																																											
5440.50	49.93	68.30	-18.37	31.56	34.67	9.90	30.50																																											
5720.00	85.64	87.50	-1.86	75.68	10.82	10.86	30.50																																											
5900.00	51.66	68.30	-16.64	35.02	33.34	10.23	30.66																																											
Avg.	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> </thead> <tbody> <tr> <td>5460.00</td> <td>42.11</td> <td>54.00</td> <td>-11.89</td> <td>28.05</td> <td>34.66</td> <td>9.90</td> <td>30.50</td> </tr> <tr> <td>5720.00</td> <td>89.25</td> <td>87.50</td> <td>1.75</td> <td>75.05</td> <td>10.12</td> <td>10.19</td> <td>30.50</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	5460.00	42.11	54.00	-11.89	28.05	34.66	9.90	30.50	5720.00	89.25	87.50	1.75	75.05	10.12	10.19	30.50	Left blank																
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																											
5460.00	42.11	54.00	-11.89	28.05	34.66	9.90	30.50																																											
5720.00	89.25	87.50	1.75	75.05	10.12	10.19	30.50																																											



**UNII-2C – Straddle Channel
WIFI 802.11ac VHT 40 (Band Edge @ 3m)**

WIFI	UNII-2C Straddle Channel Band Edge @ 3m																																																																							
ANT	802.11ac VHT 40 CH142 5710MHz - L																																																																							
6	Horizontal	Fundamental																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBm/100MHz</th> <th>dBm/100MHz</th> <th>dB</th> <th>dBm</th> <th>dB/100MHz</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5446.00</td> <td>51.49</td> <td>74.00</td> <td>-22.51</td> <td>37.46</td> <td>34.65</td> <td>9.88</td> <td>30.50</td> <td>100</td> <td>81</td> <td>Peak</td> </tr> <tr> <td>2 5468.25</td> <td>50.18</td> <td>68.30</td> <td>-18.12</td> <td>36.18</td> <td>34.67</td> <td>9.51</td> <td>30.50</td> <td>100</td> <td>82</td> <td>Peak</td> </tr> <tr> <td>3 5710.00</td> <td>97.21</td> <td>.....</td> <td>.....</td> <td>82.63</td> <td>35.03</td> <td>18.11</td> <td>30.58</td> <td>100</td> <td>81</td> <td>Peak</td> </tr> <tr> <td>4 5889.00</td> <td>52.02</td> <td>68.30</td> <td>-16.28</td> <td>37.13</td> <td>35.32</td> <td>18.22</td> <td>30.65</td> <td>100</td> <td>81</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBm/100MHz	dBm/100MHz	dB	dBm	dB/100MHz	dB	dB	cm	deg	1 5446.00	51.49	74.00	-22.51	37.46	34.65	9.88	30.50	100	81	Peak	2 5468.25	50.18	68.30	-18.12	36.18	34.67	9.51	30.50	100	82	Peak	3 5710.00	97.21	82.63	35.03	18.11	30.58	100	81	Peak	4 5889.00	52.02	68.30	-16.28	37.13	35.32	18.22	30.65	100	81	Peak	
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																	
MHz	dBm/100MHz	dBm/100MHz	dB	dBm	dB/100MHz	dB	dB	cm	deg																																																															
1 5446.00	51.49	74.00	-22.51	37.46	34.65	9.88	30.50	100	81	Peak																																																														
2 5468.25	50.18	68.30	-18.12	36.18	34.67	9.51	30.50	100	82	Peak																																																														
3 5710.00	97.21	82.63	35.03	18.11	30.58	100	81	Peak																																																														
4 5889.00	52.02	68.30	-16.28	37.13	35.32	18.22	30.65	100	81	Peak																																																														
Avg.	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBm/100MHz</th> <th>dBm/100MHz</th> <th>dB</th> <th>dBm</th> <th>dB/100MHz</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5446.00</td> <td>42.56</td> <td>54.00</td> <td>-11.44</td> <td>28.15</td> <td>34.66</td> <td>9.89</td> <td>30.50</td> <td>100</td> <td>82</td> <td>Average</td> </tr> <tr> <td>2 5710.00</td> <td>90.15</td> <td>.....</td> <td>.....</td> <td>75.59</td> <td>35.03</td> <td>18.11</td> <td>30.58</td> <td>100</td> <td>81</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBm/100MHz	dBm/100MHz	dB	dBm	dB/100MHz	dB	dB	cm	deg	1 5446.00	42.56	54.00	-11.44	28.15	34.66	9.89	30.50	100	82	Average	2 5710.00	90.15	75.59	35.03	18.11	30.58	100	81	Average	Left blank																						
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																	
MHz	dBm/100MHz	dBm/100MHz	dB	dBm	dB/100MHz	dB	dB	cm	deg																																																															
1 5446.00	42.56	54.00	-11.44	28.15	34.66	9.89	30.50	100	82	Average																																																														
2 5710.00	90.15	75.59	35.03	18.11	30.58	100	81	Average																																																														



WIFI	UNII-2C Straddle Channel Band Edge @ 3m																																																															
ANT	802.11ac VHT 40CH142 5710MHz - L																																																															
6	Vertical	Fundamental																																																														
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> </thead> <tbody> <tr> <td>MFC</td> <td>dBm/100MHz</td> <td>dB</td> <td>dBm</td> <td>dB/m</td> <td>dB</td> <td>dB</td> <td>deg</td> </tr> <tr> <td>1</td> <td>5446.00</td> <td>50.00</td> <td>75.00</td> <td>-23.02</td> <td>30.05</td> <td>9.88</td> <td>30.50</td> <td>148 Peak</td> </tr> <tr> <td>2</td> <td>5469.00</td> <td>50.00</td> <td>68.30</td> <td>-18.22</td> <td>30.00</td> <td>34.67</td> <td>9.91</td> <td>30.50</td> <td>148 Peak</td> </tr> <tr> <td>3</td> <td>5720.00</td> <td>60.00</td> <td>.....</td> <td>25.48</td> <td>35.03</td> <td>30.11</td> <td>30.50</td> <td>148 Peak</td> </tr> <tr> <td>4</td> <td>5890.10</td> <td>52.00</td> <td>-16.24</td> <td>37.17</td> <td>35.32</td> <td>30.22</td> <td>30.65</td> <td>100</td> <td>148 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MFC	dBm/100MHz	dB	dBm	dB/m	dB	dB	deg	1	5446.00	50.00	75.00	-23.02	30.05	9.88	30.50	148 Peak	2	5469.00	50.00	68.30	-18.22	30.00	34.67	9.91	30.50	148 Peak	3	5720.00	60.00	25.48	35.03	30.11	30.50	148 Peak	4	5890.10	52.00	-16.24	37.17	35.32	30.22	30.65	100	148 Peak	Left blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																									
MFC	dBm/100MHz	dB	dBm	dB/m	dB	dB	deg																																																									
1	5446.00	50.00	75.00	-23.02	30.05	9.88	30.50	148 Peak																																																								
2	5469.00	50.00	68.30	-18.22	30.00	34.67	9.91	30.50	148 Peak																																																							
3	5720.00	60.00	25.48	35.03	30.11	30.50	148 Peak																																																								
4	5890.10	52.00	-16.24	37.17	35.32	30.22	30.65	100	148 Peak																																																							
Avg.	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> </thead> <tbody> <tr> <td>MFC</td> <td>dBm/100MHz</td> <td>dB</td> <td>dBm</td> <td>dB/m</td> <td>dB</td> <td>dB</td> <td>deg</td> </tr> <tr> <td>1</td> <td>5456.70</td> <td>42.85</td> <td>54.00</td> <td>-11.15</td> <td>28.80</td> <td>34.66</td> <td>9.89</td> <td>30.50</td> <td>100</td> <td>148 Average</td> </tr> <tr> <td>2</td> <td>5720.00</td> <td>60.00</td> <td>.....</td> <td>25.48</td> <td>35.03</td> <td>30.11</td> <td>30.50</td> <td>100</td> <td>148 Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MFC	dBm/100MHz	dB	dBm	dB/m	dB	dB	deg	1	5456.70	42.85	54.00	-11.15	28.80	34.66	9.89	30.50	100	148 Average	2	5720.00	60.00	25.48	35.03	30.11	30.50	100	148 Average	Left blank																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																									
MFC	dBm/100MHz	dB	dBm	dB/m	dB	dB	deg																																																									
1	5456.70	42.85	54.00	-11.15	28.80	34.66	9.89	30.50	100	148 Average																																																						
2	5720.00	60.00	25.48	35.03	30.11	30.50	100	148 Average																																																							



**UNII-2C – Straddle Channel
WIFI 802.11ac VHT 80 (Band Edge @ 3m)**

WIFI	UNII-2C Straddle Channel Band Edge @ 3m																																																					
ANT	802.11ac VHT80 CH138 5690MHz - L																																																					
6	Horizontal	Fundamental																																																				
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>5425.00</td> <td>51.75</td> <td>74.00</td> <td>-22.25</td> <td>37.75</td> <td>34.64</td> <td>9.86</td> <td>30.50</td> <td>69 Peak</td> </tr> <tr> <td>5467.70</td> <td>50.13</td> <td>68.30</td> <td>-18.17</td> <td>38.63</td> <td>34.67</td> <td>9.91</td> <td>30.50</td> <td>69 Peak</td> </tr> <tr> <td>5690.00</td> <td>95.86</td> <td>.....</td> <td>.....</td> <td>81.34</td> <td>35.00</td> <td>38.10</td> <td>30.58</td> <td>69 Peak</td> </tr> <tr> <td>5867.55</td> <td>52.71</td> <td>68.30</td> <td>-15.59</td> <td>37.89</td> <td>35.29</td> <td>38.21</td> <td>30.64</td> <td>69 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor			5425.00	51.75	74.00	-22.25	37.75	34.64	9.86	30.50	69 Peak	5467.70	50.13	68.30	-18.17	38.63	34.67	9.91	30.50	69 Peak	5690.00	95.86	81.34	35.00	38.10	30.58	69 Peak	5867.55	52.71	68.30	-15.59	37.89	35.29	38.21	30.64	69 Peak	Left blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																															
Freq	Level	Line	Margin	Level	Factor																																																	
5425.00	51.75	74.00	-22.25	37.75	34.64	9.86	30.50	69 Peak																																														
5467.70	50.13	68.30	-18.17	38.63	34.67	9.91	30.50	69 Peak																																														
5690.00	95.86	81.34	35.00	38.10	30.58	69 Peak																																														
5867.55	52.71	68.30	-15.59	37.89	35.29	38.21	30.64	69 Peak																																														
Avg.	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>5456.50</td> <td>44.51</td> <td>54.00</td> <td>-9.49</td> <td>38.46</td> <td>34.66</td> <td>9.89</td> <td>30.50</td> <td>69 Average</td> </tr> <tr> <td>5690.00</td> <td>89.87</td> <td>.....</td> <td>.....</td> <td>75.35</td> <td>35.00</td> <td>38.10</td> <td>30.58</td> <td>69 Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor			5456.50	44.51	54.00	-9.49	38.46	34.66	9.89	30.50	69 Average	5690.00	89.87	75.35	35.00	38.10	30.58	69 Average	Left blank																		
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																															
Freq	Level	Line	Margin	Level	Factor																																																	
5456.50	44.51	54.00	-9.49	38.46	34.66	9.89	30.50	69 Average																																														
5690.00	89.87	75.35	35.00	38.10	30.58	69 Average																																														



WIFI	UNII-2C Straddle Channel Band Edge @ 3m																																																													
ANT	802.11ac VHT80 CH138 5690MHz - L																																																													
6	Vertical	Fundamental																																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Loss</th> <th>Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>5450.00</td> <td>51.55</td> <td>74.00</td> <td>-22.45</td> <td>37.50</td> <td>34.50</td> <td>9.89</td> <td>30.50</td> <td>100</td> <td>178 Peak</td> </tr> <tr> <td>5464.00</td> <td>51.65</td> <td>68.30</td> <td>-16.65</td> <td>37.58</td> <td>34.87</td> <td>9.90</td> <td>30.50</td> <td>100</td> <td>178 Peak</td> </tr> <tr> <td>5690.00</td> <td>86.65</td> <td>87.50</td> <td>-0.85</td> <td>37.58</td> <td>34.87</td> <td>9.90</td> <td>30.50</td> <td>100</td> <td>178 Peak</td> </tr> <tr> <td>5831.00</td> <td>54.28</td> <td>68.30</td> <td>-14.02</td> <td>39.66</td> <td>35.26</td> <td>10.20</td> <td>30.64</td> <td>100</td> <td>178 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Loss	Factor	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor					5450.00	51.55	74.00	-22.45	37.50	34.50	9.89	30.50	100	178 Peak	5464.00	51.65	68.30	-16.65	37.58	34.87	9.90	30.50	100	178 Peak	5690.00	86.65	87.50	-0.85	37.58	34.87	9.90	30.50	100	178 Peak	5831.00	54.28	68.30	-14.02	39.66	35.26	10.20	30.64	100	178 Peak	Left blank
Limit	Read	Ant	Cable	Preamp	Loss	Factor	APos	TPos	Remark																																																					
Freq	Level	Line	Margin	Level	Factor																																																									
5450.00	51.55	74.00	-22.45	37.50	34.50	9.89	30.50	100	178 Peak																																																					
5464.00	51.65	68.30	-16.65	37.58	34.87	9.90	30.50	100	178 Peak																																																					
5690.00	86.65	87.50	-0.85	37.58	34.87	9.90	30.50	100	178 Peak																																																					
5831.00	54.28	68.30	-14.02	39.66	35.26	10.20	30.64	100	178 Peak																																																					
Avg.	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Loss</th> <th>Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>5444.00</td> <td>44.47</td> <td>54.00</td> <td>-9.53</td> <td>30.44</td> <td>34.65</td> <td>9.88</td> <td>30.50</td> <td>100</td> <td>178 Average</td> </tr> <tr> <td>5690.00</td> <td>86.59</td> <td>87.50</td> <td>-0.91</td> <td>37.58</td> <td>34.87</td> <td>9.90</td> <td>30.50</td> <td>100</td> <td>178 Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Loss	Factor	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor					5444.00	44.47	54.00	-9.53	30.44	34.65	9.88	30.50	100	178 Average	5690.00	86.59	87.50	-0.91	37.58	34.87	9.90	30.50	100	178 Average	Left blank																				
Limit	Read	Ant	Cable	Preamp	Loss	Factor	APos	TPos	Remark																																																					
Freq	Level	Line	Margin	Level	Factor																																																									
5444.00	44.47	54.00	-9.53	30.44	34.65	9.88	30.50	100	178 Average																																																					
5690.00	86.59	87.50	-0.91	37.58	34.87	9.90	30.50	100	178 Average																																																					



UNII-2C - Straddle Channel

WIFI 802.11a (Harmonic @ 3m)

WIFI	UNII-2C Straddle Channel Harmonic @ 3m																																																																																																																	
ANT	802.11a CH144 5720MHz																																																																																																																	
6	Horizontal	Vertical																																																																																																																
Peak Avg.	<table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Loss</th> <th>Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 15440.00</td> <td>48.86</td> <td>74.00</td> <td>-25.14</td> <td>56.55</td> <td>38.54</td> <td>13.71</td> <td>57.94</td> <td>...</td> <td>...</td> <td>...</td> <td>...</td> <td>...</td> <td>Peak</td> </tr> <tr> <td>2 17160.00</td> <td>58.93</td> <td>68.30</td> <td>-17.37</td> <td>49.87</td> <td>45.27</td> <td>16.55</td> <td>56.76</td> <td>...</td> <td>...</td> <td>...</td> <td>...</td> <td>...</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Loss	Factor	APos	TPos	Remark	MHz	dBm	dBm	dBm	dB	dBm	dB	dB	dB	dB	dB	dB	dB	dB	1 15440.00	48.86	74.00	-25.14	56.55	38.54	13.71	57.94	Peak	2 17160.00	58.93	68.30	-17.37	49.87	45.27	16.55	56.76	Peak	<table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Loss</th> <th>Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 15440.00</td> <td>49.35</td> <td>74.00</td> <td>-24.65</td> <td>55.84</td> <td>38.54</td> <td>13.71</td> <td>57.94</td> <td>...</td> <td>...</td> <td>...</td> <td>...</td> <td>...</td> <td>Peak</td> </tr> <tr> <td>2 17160.00</td> <td>58.71</td> <td>68.30</td> <td>-17.59</td> <td>49.65</td> <td>41.27</td> <td>16.55</td> <td>56.76</td> <td>...</td> <td>...</td> <td>...</td> <td>...</td> <td>...</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Loss	Factor	APos	TPos	Remark	MHz	dBm	dBm	dBm	dB	dBm	dB	dB	dB	dB	dB	dB	dB	dB	1 15440.00	49.35	74.00	-24.65	55.84	38.54	13.71	57.94	Peak	2 17160.00	58.71	68.30	-17.59	49.65	41.27	16.55	56.76	Peak
Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Loss	Factor	APos	TPos	Remark																																																																																																					
MHz	dBm	dBm	dBm	dB	dBm	dB	dB	dB	dB	dB	dB	dB	dB																																																																																																					
1 15440.00	48.86	74.00	-25.14	56.55	38.54	13.71	57.94	Peak																																																																																																					
2 17160.00	58.93	68.30	-17.37	49.87	45.27	16.55	56.76	Peak																																																																																																					
Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Loss	Factor	APos	TPos	Remark																																																																																																					
MHz	dBm	dBm	dBm	dB	dBm	dB	dB	dB	dB	dB	dB	dB	dB																																																																																																					
1 15440.00	49.35	74.00	-24.65	55.84	38.54	13.71	57.94	Peak																																																																																																					
2 17160.00	58.71	68.30	-17.59	49.65	41.27	16.55	56.76	Peak																																																																																																					

UNII-2C – Straddle Channel

WIFI 802.11ac VHT20 (Harmonic @ 3m)

WIFI	UNII-2C Straddle Channel Harmonic @ 3m																																																																																																																	
ANT	802.11ac VHT20 CH144 5720MHz																																																																																																																	
6	Horizontal	Vertical																																																																																																																
Peak Avg.	<table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Loss</th> <th>Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 15440.00</td> <td>48.64</td> <td>74.00</td> <td>-25.36</td> <td>54.33</td> <td>38.54</td> <td>13.71</td> <td>57.94</td> <td>...</td> <td>...</td> <td>...</td> <td>...</td> <td>...</td> <td>Peak</td> </tr> <tr> <td>2 17160.00</td> <td>58.70</td> <td>68.30</td> <td>-17.60</td> <td>49.64</td> <td>43.27</td> <td>16.55</td> <td>56.76</td> <td>...</td> <td>...</td> <td>...</td> <td>...</td> <td>...</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Loss	Factor	APos	TPos	Remark	MHz	dBm	dBm	dBm	dB	dBm	dB	dB	dB	dB	dB	dB	dB	dB	1 15440.00	48.64	74.00	-25.36	54.33	38.54	13.71	57.94	Peak	2 17160.00	58.70	68.30	-17.60	49.64	43.27	16.55	56.76	Peak	<table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Loss</th> <th>Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 15440.00</td> <td>49.27</td> <td>74.00</td> <td>-24.73</td> <td>54.96</td> <td>38.54</td> <td>13.71</td> <td>57.94</td> <td>...</td> <td>...</td> <td>...</td> <td>...</td> <td>...</td> <td>Peak</td> </tr> <tr> <td>2 17160.00</td> <td>58.10</td> <td>68.30</td> <td>-18.20</td> <td>49.84</td> <td>41.27</td> <td>16.55</td> <td>56.76</td> <td>...</td> <td>...</td> <td>...</td> <td>...</td> <td>...</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Loss	Factor	APos	TPos	Remark	MHz	dBm	dBm	dBm	dB	dBm	dB	dB	dB	dB	dB	dB	dB	dB	1 15440.00	49.27	74.00	-24.73	54.96	38.54	13.71	57.94	Peak	2 17160.00	58.10	68.30	-18.20	49.84	41.27	16.55	56.76	Peak
Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Loss	Factor	APos	TPos	Remark																																																																																																					
MHz	dBm	dBm	dBm	dB	dBm	dB	dB	dB	dB	dB	dB	dB	dB																																																																																																					
1 15440.00	48.64	74.00	-25.36	54.33	38.54	13.71	57.94	Peak																																																																																																					
2 17160.00	58.70	68.30	-17.60	49.64	43.27	16.55	56.76	Peak																																																																																																					
Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Loss	Factor	APos	TPos	Remark																																																																																																					
MHz	dBm	dBm	dBm	dB	dBm	dB	dB	dB	dB	dB	dB	dB	dB																																																																																																					
1 15440.00	49.27	74.00	-24.73	54.96	38.54	13.71	57.94	Peak																																																																																																					
2 17160.00	58.10	68.30	-18.20	49.84	41.27	16.55	56.76	Peak																																																																																																					




Appendix D. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
6	802.11a	97.46	1.391	0.719	1KHz
6	802.11ac VHT20	97.31	1.312	0.762	1KHz
6	802.11ac VHT40	94.74	0.652	1.533	3KHz
6	802.11ac VHT80	89.60	0.325	3.080	10KHZ




802.11a

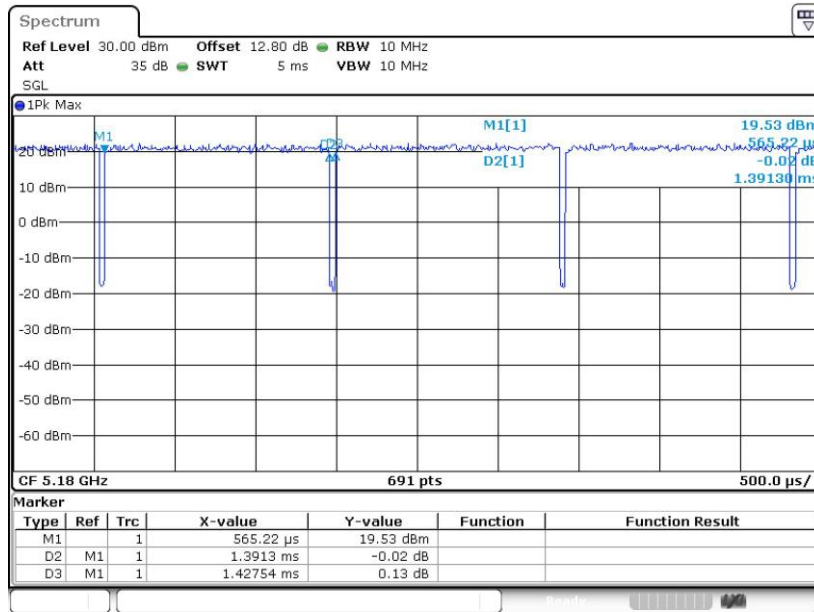

Date: 12.JUN.2023 20:21:12


802.11ac VHT20

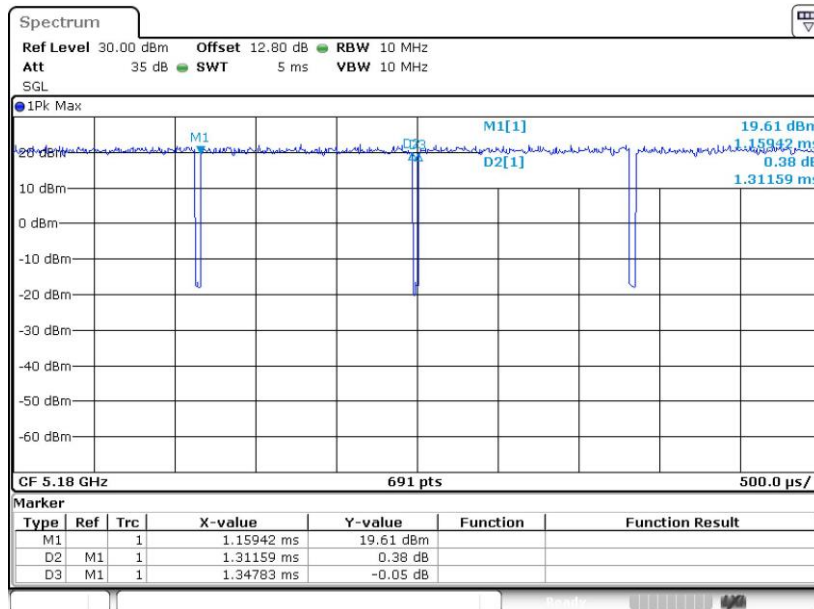

Date: 12.JUN.2023 21:15:17




802.11ac VHT40

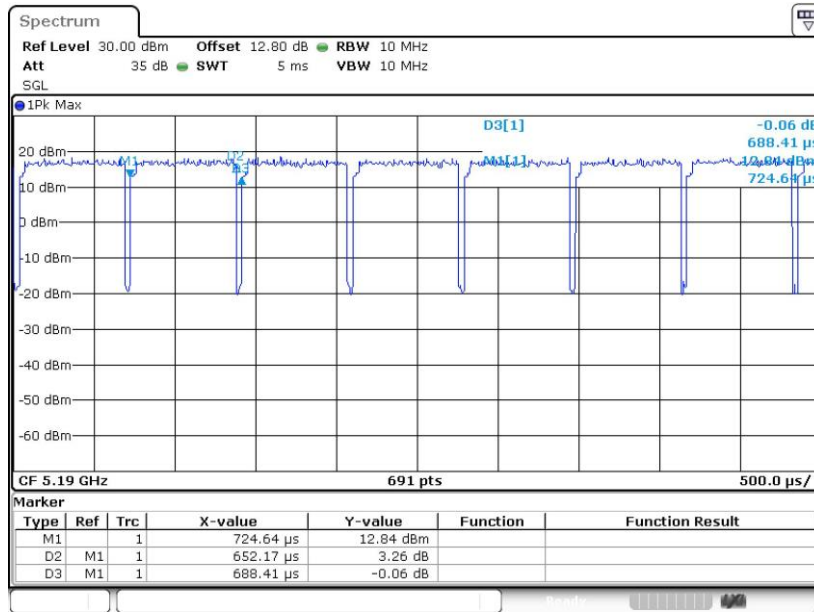

Date: 12.JUN.2023 21:07:32

802.11ac VHT80

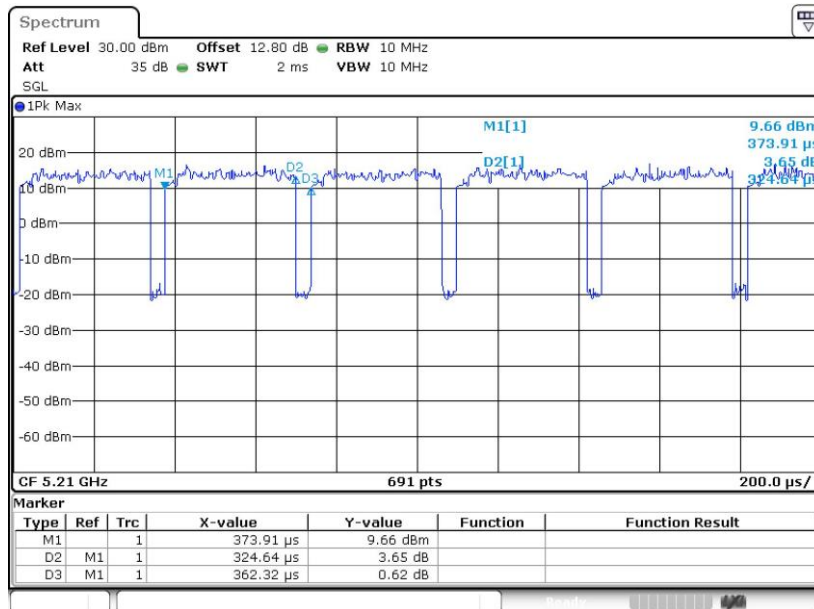

Date: 12.JUN.2023 21:17:17