



FCC TEST REPORT

FCC ID:2A5TQ-R200

Report Number.....: ZKT-240320L2793-2

Date of Test..... Mar. 14, 2024 to Mar. 25, 2024

Date of issue.....: Mar. 25, 2024

Total number of pages..... 87

Test Result: PASS

Testing Laboratory.....: Shenzhen ZKT Technology Co., Ltd.

Address: 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name: SHENZHEN SAGE IOT TECHNOLOGY CO.,LTD

Address: 4th Floor, Building B, Qiao Hongsheng cultural and creative garden, Xixiang Jiedao, Bao'an District, Shenzhen City, China

Manufacturer's name: Dongguan Jiugao electronic technology Co., LTD

Address: Room 401, Building 2, No. 853, Jie Nan Road, Humen Town, Dongguan City, Guangdong Province, China

Test specification:

Standard.....: FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2013

Test procedure.....: /

Non-standard test method: N/A

Test Report Form No.....: TRF-EL-111_V0

Test Report Form(s) Originator.....: ZKT Testing

Master TRF: Dated: 2020-01-06

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

Product name.....: Wireless screen projector

Trademark: N/A

Model/Type reference.....: R200, R201, R202, R203, R204, R205, R206, R207, R208, R209.

Ratings.....: 5.0V---2.0A or DC 7.4V from the battery



Testing procedure and testing location:

Testing Laboratory.....: Shenzhen ZKT Technology Co., Ltd.

**Address.....: 1/F, No. 101, Building B, No. 6, Tangwei Community
Industrial Avenue, Fuhai Street, Bao'an District,
Shenzhen, China**

Tested by (name + signature).....: Alen He

Reviewer (name + signature).....: Joe Liu

Approved (name + signature).....: Lake Xie





Table of Contents	Page
1. VERSION	5
2.SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.4 DESCRIPTION OF SUPPORT UNITS	10
3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	11
4.EMC EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION Limits	13
4.1.2 TEST PROCEDURE	13
4.1.3 DEVIATION FROM TEST STANDARD	13
4.1.4 TEST SETUP	14
4.1.5 EUT OPERATING CONDITIONS	14
4.1.6 TEST RESULT (Worst case 802.11a 5180MHz-ant0)	15
4.2 RADIATED EMISSION MEASUREMENT	17
4.2.1 APPLICABLE STANDARD	17
4.2.2 CONFORMANCE LIMIT	17
4.2.3 MEASURING INSTRUMENTS	18
4.2.4 TEST CONFIGURATION	18
4.2.5 TEST PROCEDURE	19
4.2.6 TEST RESULT	20
5.POWER SPECTRAL DENSITY TEST	37
5.1 APPLIED PROCEDURES / LIMIT	37
5.2 TEST PROCEDURE	38
5.3 DEVIATION FROM STANDARD	38
5.4 TEST METHOD	38
5.5 TEST SETUP	38
5.6 EUT OPERATION CONDITIONS	38
5.7 TEST RESULTS	39
6.26DB & 6DB & 99% EMISSION BANDWIDTH	48
6.1 APPLIED PROCEDURES / LIMIT	48
6.2 TEST PROCEDURE	49
6.3 EUT OPERATION CONDITIONS	49
6.4 TEST RESULTS	49
7.MAXIMUM CONDUCTED OUTPUT POWER	64



Table of Contents	Page
7.1 PPLIED PROCEDURES / LIMIT	64
7.2 TEST PROCEDURE	64
7.3 DEVIATION FROM STANDARD	65
7.4 TEST SETUP	65
7.5 EUT OPERATION CONDITIONS	65
7.6 TEST RESULTS	66
8.OUT OF BAND EMISSIONS	67
8.1 APPLICABLE STANDARD	67
8.2 TEST PROCEDURE	68
8.3 DEVIATION FROM STANDARD	68
8.4 TEST SETUP	69
8.5 EUT OPERATION CONDITIONS	69
8.6 TEST RESULTS	70
10.Frequency Stability Measurement	72
10.1 LIMIT	72
10.2 TEST PROCEDURES	72
10.3 TEST SETUP LAYOUT	72
10.4 EUT OPERATION DURING TEST	72
10.5 TEST RESULTS	72
11. DUTY CYCLE	76
12.ANTENNA REQUIREMENT	86
13. TEST SETUP PHOTO	87
14. EUT CONSTRUCTIONAL DETAILS	87



1. VERSION

Report No.	Version	Description	Approved
ZKT-240320L2793-2	Rev.01	Initial issue of report	Mar. 25, 2024



2.SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.407) , Subpart E			
Standard Section	Test Item	Judgment	Remark
15.209(a) 15.407 (b)	Spurious Radiated Emissions	PASS	
Duty Cycle	KDB 789033	--	
15.207	Conducted Emission	PASS	
15.407 (a)(12) 2.1049	26 dB and 99% Emission Bandwidth	PASS	
15.407(e)	6 dB bandwidth	PASS	
15.407 (a)(1) 15.407 (a)(3)	Maximum Conducted Output Power&Eirp	PASS	
2.1051, 15.407(b)(1) 15.407(b)(4)	Band Edge	PASS	
15.407 (a)(1) 15.407 (a)(3)	Power Spectral Density	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

Test method: KDB 789033 D02 v01r02, KDB 662911 D01 Multiple Transmitter Output v02r01



2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.

Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 692225

Designation Number: CN1299

IC Registered No.: 27033

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 % .

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9KHz-30MHz)	U=4.5dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.8dB
3	3m chamber Radiated spurious emission(1GHz-6GHz)	U=4.9dB
4	3m chamber Radiated spurious emission(6GHz-40GHz)	U=5.0dB
5	Conducted disturbance	U=3.2dB
6	RF Band Edge	U=1.68dB
7	RF power conducted	U=1.86dB
8	RF conducted Spurious Emission	U=2.2dB
9	RF Occupied Bandwidth	U=1.8dB
10	RF Power Spectral Density	U=1.75dB
11	humidity uncertainty	U=5.3%
12	Temperature uncertainty	U=0.59℃



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Applicant:	SHENZHEN SAGE IOT TECHNOLOGY CO.,LTD	
Address of applicant:	4th Floor, Building B, Qiao Hongsheng cultural and creative garden, Xixiang Jiedao, Bao'an District, Shenzhen City, China	
Manufacturer:	Dongguan Jiugao electronic technology Co., LTD	
Address of manufacturer:	Room 401, Building 2, No. 853, Jie Nan Road, Humen Town, Dongguan City, Guangdong Province, China	
Product Name:	Wireless screen projector	
Model No.:	R200, R201, R202, R203, R204, R205, R206, R207, R208, R209.	
Model Different.:	Only the model names are different.(Main test model: R200)	
Sample ID	N/A	
Sample(s) Status:	Engineer sample	
Product Description	IEEE 802.11 WLAN Mode Supported	☒ 802.11a/n/ac (20MHz channel bandwidth)
	Data Rate	802.11a:6/9/12/18/24/36/48/54Mbps 802.11n(HT20):MCS0-MCS7 802.11ac(VHT20):MCS0-MCS8
	Modulation	OFDM with BPSK/QPSK/16QAM/64QAM for 802.11a/n/ac 20
	Operating Frequency Range	☒ 5180-5240MHz for 802.11a/n/ac(HT20) ☒ 5745-5825MHz for 802.11a/n/ac(HT20);
	Number of Channels	☒ 4 channels for 802.11a/n20/ac20 in the 5180-5240MHz band ☒ 5channels for 802.11a/n20/ac20 in the 5745-5825MHz band
Channel List	Please refer to the Note 2.	
Antenna Type:	External detachable antenna	
Antenna gain:	ANT 0: 3 dBi ANT 1: 3 dBi	
HVIN/Hardware version:	V1.0	
FVIN/Software version:	V1.0	
Power supply:	5.0V===2.0A or DC 7.4V from the battery	
Adapter:	Input:100-240V~ 50/60Hz 0.6A Output:5.0V===2.0A 10.0W	



802.11a/n/ac(20MHz) Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220	149	5745	157-	5785
40	5200	48	5240	153	5765	161	5805
165	5825						

3.2 DESCRIPTION OF TEST MODES

Transmitting mode	Keep the EUT in continuously transmitting mode
Remark: During the test, the duty cycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

Pretest Mode	Description
Mode 1	802.11a/n 20/ac 20 CH36/ CH40/ CH 48 CH149/ CH157/ CH 165

Conducted Emission	
Final Test Mode	Description
Mode 1	802.11a CH36

For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11a CH36

Note:


(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.



Test Software	Realtek Test Tool
Power level setup	<20dBm

3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Emission



Radiated Emission



Conducted Spurious



3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
/	/	/	/	/	/
/	/	/	/	/	/

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	9020A	MY55370835	A.17.05	Nov. 02, 2023	Nov. 01, 2024
2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSV40-N	100363	1.71 SP2	Nov. 02, 2023	Nov. 01, 2024
3	EMI Test Receiver (9kHz-7GHz)	R&S	ESCI7	100969	4.32	Nov. 02, 2023	Nov. 01, 2024
4	Bilog Antenna (30MHz-1500MHz)	Schwarzbeck	VULB9168	N/A	N/A	Nov. 13, 2023	Nov. 12, 2024
5	Horn Antenna (1GHz-18GHz)	Agilent	AH-118	071145	N/A	Nov. 13, 2023	Nov. 12, 2024
6	Horn Antenna (15GHz-40GHz)	A.H.System	SAS-574	588	N/A	Nov. 13, 2023	Nov. 12, 2024
7	Loop Antenna	TESEQ	HLA6121	58357	N/A	Nov. 16, 2023	Nov. 15, 2024
8	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	60747	N/A	Nov. 02, 2023	Nov. 01, 2024
9	Amplifier (1GHz-26.5GHz)	HuiPu	8449B	3008A00315	N/A	Nov. 02, 2023	Nov. 01, 2024
10	Amplifier (500MHz-40GHz)	QuanJuDa	DLE-161	097	N/A	Nov. 02, 2023	Nov. 01, 2024
11	Test Cable	N/A	R-01	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
12	Test Cable	N/A	R-02	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
13	Test Cable	N/A	R-03	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
14	Test Cable	N/A	RF-01	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
15	Test Cable	N/A	RF-02	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
16	Test Cable	N/A	RF-03	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
17	ESG Signal Generator	Agilent	E4421B	N/A	B.03.84	Nov. 02, 2023	Nov. 01, 2024
18	Signal Generator	Agilent	N5182A	N/A	A.01.87	Nov. 02, 2023	Nov. 01, 2024
19	Magnetic Field Probe Tester	Narda	ELT-400	0-0344	N/A	Nov. 16, 2023	Nov. 15, 2024
20	Wideband Radio Communication Test	R&S	CMW500	106504	V 3.7.22	Nov. 02, 2023	Nov. 01, 2024
21	MWRF Power Meter Test system	MW	MW100-RF CB	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
22	D.C. Power Supply	LongWei	TPR-6405D	N/A	N/A	\	\
23	EMC Software	Frad	EZ-EMC	Ver.EMC-CO N 3A1.1	N/A	\	\
24	RF Software	MW	MTS8310	V2.0.0.0	N/A	\	\
25	Turntable	MF	MF-7802BS	N/A	N/A	\	\
26	Antenna tower	MF	MF-7802BS	N/A	N/A	\	\



Conducted emissions Test

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	N/A	Nov. 14, 2023	Nov. 13, 2024
2	LISN	CYBERTEK	EM5040A	E1850400149	N/A	Nov. 02, 2023	Nov. 01, 2024
3	Test Cable	N/A	C-01	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
4	Test Cable	N/A	C-02	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
5	Test Cable	N/A	C-03	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
6	EMI Test Receiver	R&S	ESCI3	101393	4.42 SP3	Nov. 02, 2023	Nov. 01, 2024
7	Triple-Loop Antenna	N/A	RF300	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
8	Absorbing Clamp	DZ	ZN23201	15034	N/A	Nov. 07, 2023	Nov. 06, 2024
9	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	N/A	\	\



4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013 RSS-Gen Section 8.8
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.

4.1.2 TEST PROCEDURE


- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation



4.1.4 TEST SETUP

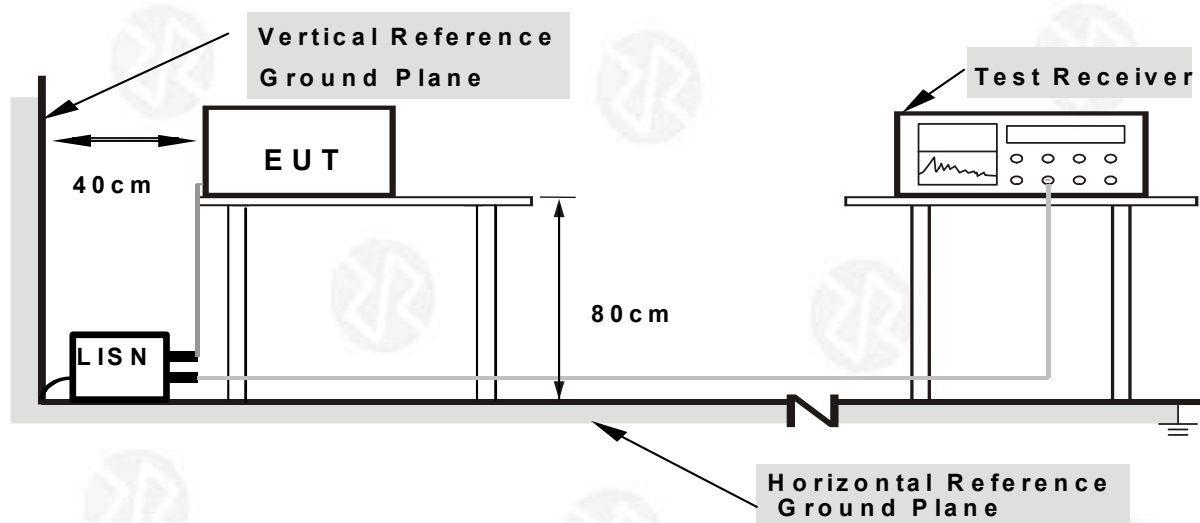

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 230V, the worst voltage was AC 120V and the data recording in the report.



4.1.6 TEST RESULT (Worst case 802.11a 5180MHz-ant0)

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz		

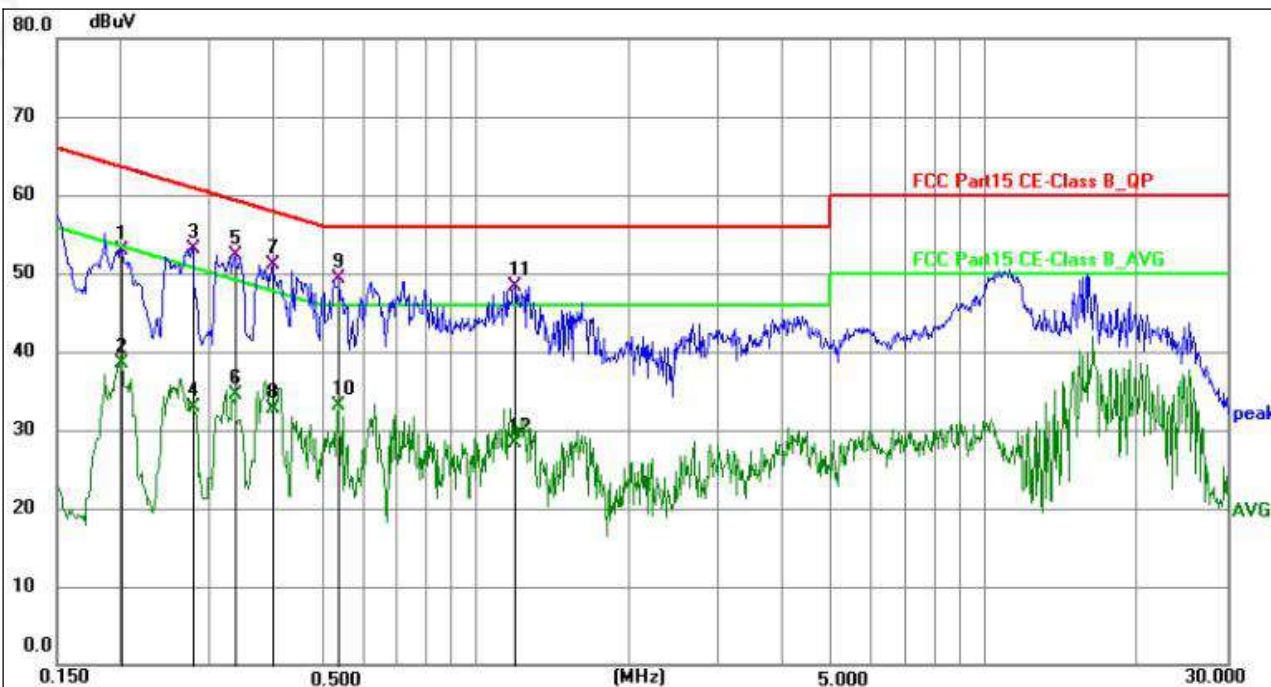


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2006	43.26	9.71	52.97	63.59	-10.62	QP	P	
2	0.2006	28.77	9.71	38.48	53.59	-15.11	AVG	P	
3	0.2760	43.33	9.68	53.01	60.94	-7.93	QP	P	
4	0.2760	23.21	9.68	32.89	50.94	-18.05	AVG	P	
5	0.3345	42.67	9.66	52.33	59.34	-7.01	QP	P	
6	0.3345	24.81	9.66	34.47	49.34	-14.87	AVG	P	
7 *	0.3975	41.55	9.64	51.19	57.91	-6.72	QP	P	
8	0.3975	23.09	9.64	32.73	47.91	-15.18	AVG	P	
9	0.5370	39.59	9.64	49.23	56.00	-6.77	QP	P	
10	0.5370	23.51	9.64	33.15	46.00	-12.85	AVG	P	
11	1.1935	38.72	9.56	48.28	56.00	-7.72	QP	P	
12	1.1935	18.73	9.56	28.29	46.00	-17.71	AVG	P	

Notes:

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Measurement Level = Reading level + Correct Factor



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz		

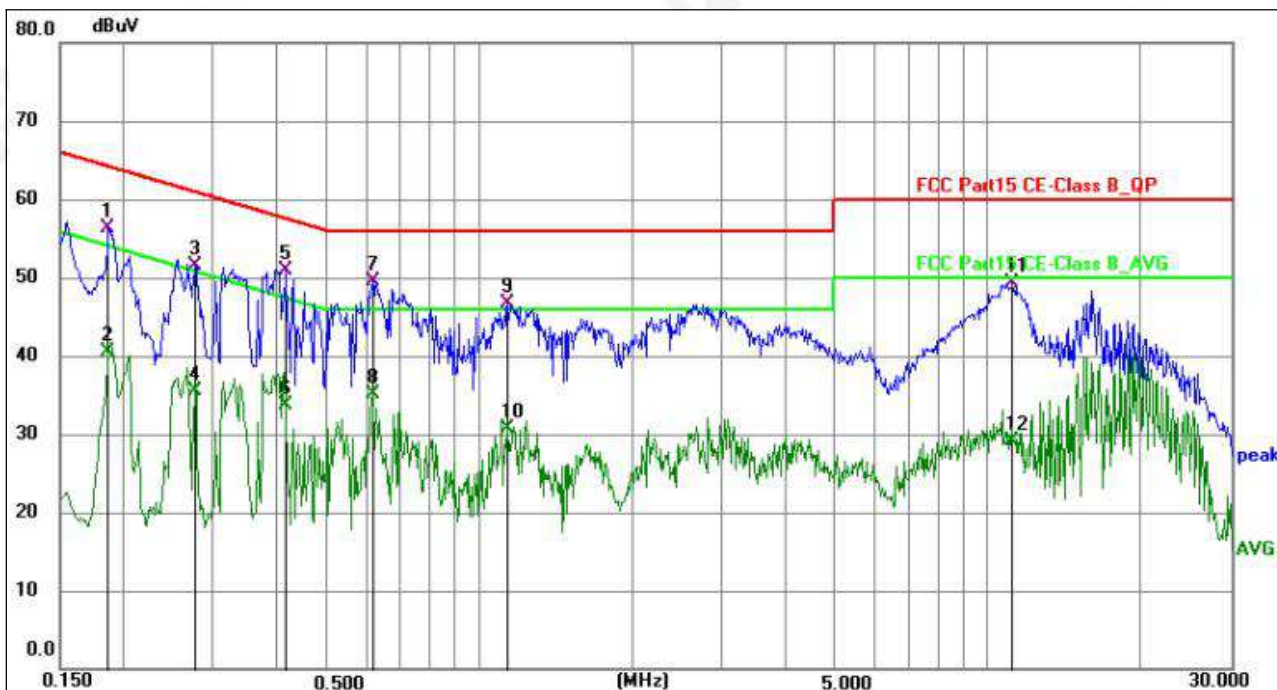

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1859	46.61	9.65	56.26	64.22	-7.96	QP	P	
2	0.1859	30.87	9.65	40.52	54.22	-13.70	AVG	P	
3	0.2757	41.92	9.68	51.60	60.94	-9.34	QP	P	
4	0.2757	25.80	9.68	35.48	50.94	-15.46	AVG	P	
5	0.4153	41.17	9.64	50.81	57.54	-6.73	QP	P	
6	0.4153	24.08	9.64	33.72	47.54	-13.82	AVG	P	
7 *	0.6179	39.83	9.68	49.51	56.00	-6.49	QP	P	
8	0.6179	25.38	9.68	35.06	46.00	-10.94	AVG	P	
9	1.1400	37.13	9.55	46.68	56.00	-9.32	QP	P	
10	1.1400	21.25	9.55	30.80	46.00	-15.20	AVG	P	
11	11.1795	39.51	9.76	49.27	60.00	-10.73	QP	P	
12	11.1795	19.29	9.76	29.05	50.00	-20.95	AVG	P	

Notes:

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Measurement Level = Reading level + Correct Factor



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 APPLICABLE STANDARD

According to FCC Part 15.407(d) and 15.209 RSS-247 Section 3.3 & RSS-Gen Section 8.9, RSS-247 Section 6.2&6.2.1.2&6.2.4.2

4.2.2 CONFORMANCE LIMIT

According to FCC Part 15.407(b): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log (uV/m)	300
0.490~1.705	2400/F(KHz)	20 log (uV/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Remark :1. Emission level in dBuV/m=20 log (uV/m)

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. Distance extrapolation factor =40log(Specific distance/ test distance)(dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor.

For FCC Band Edge Limit:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.



(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

(5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209.

Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in § 15.207.

(7) The provisions of § 15.205 apply to intentional radiators operating under this section.

For IC Band Edge Limit:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

a) 27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edges;

b) 15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges;

c) 10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges; and


d) -27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.

4.2.3 MEASURING INSTRUMENTS

The Measuring equipment is listed in the section 6.3 of this test report.


4.2.4 TEST CONFIGURATION

1. For radiated emissions below 30MHz

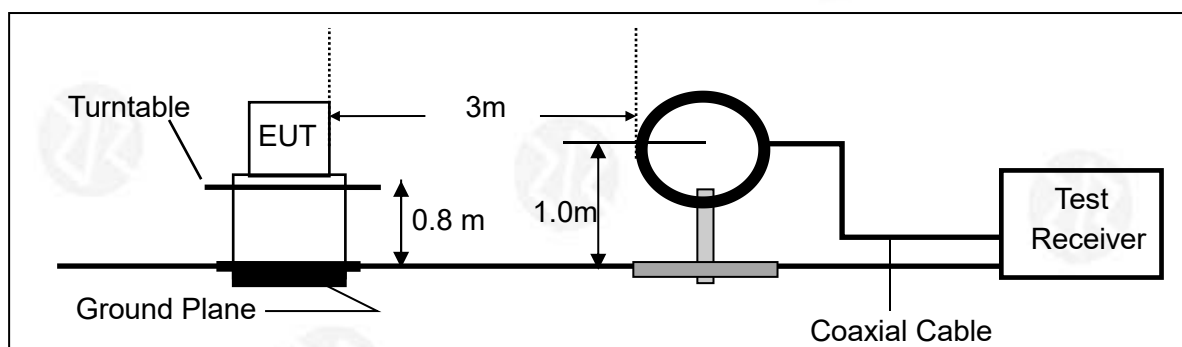




2. For radiated emissions from 30MHz to 1000MHz

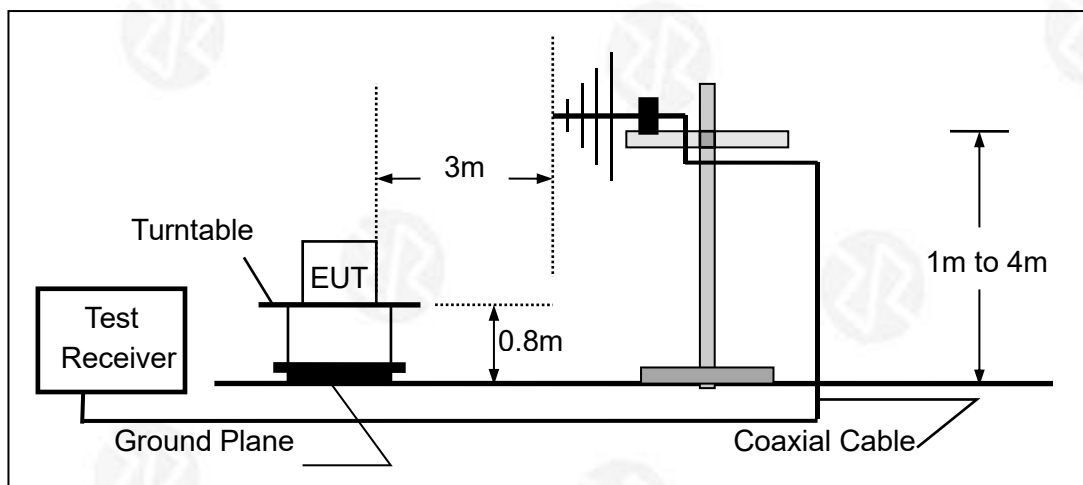

3. Radiated Emission Test-Up Frequency Above 1GHz

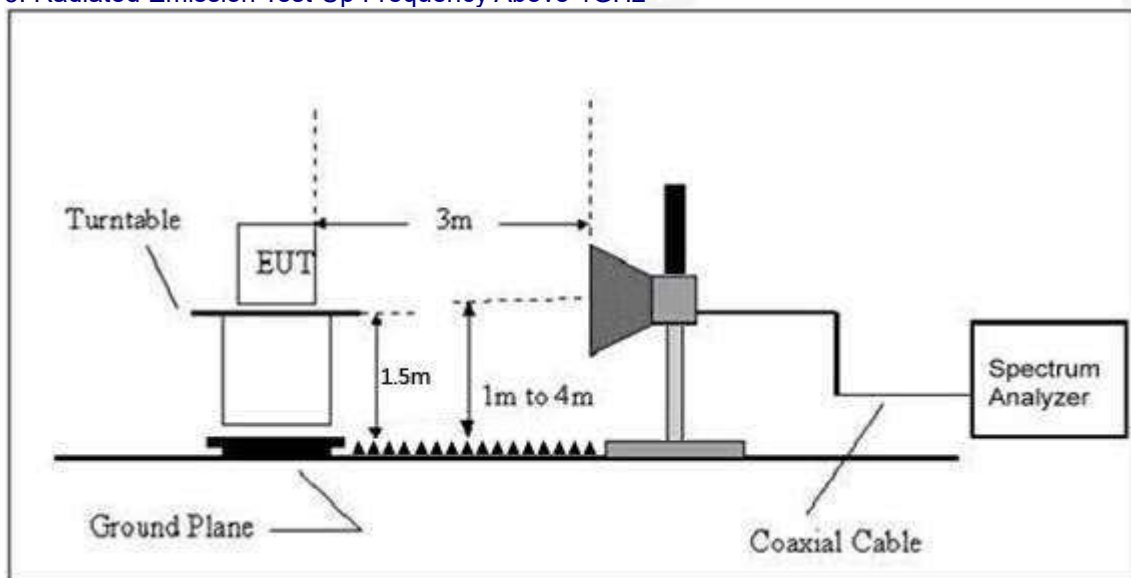

4.2.5 TEST PROCEDURE

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP



- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW [kHz]})$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

4.2.6 TEST RESULT

Between 9KHz – 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.



Between 30MHz – 1GHz

(Worst case 802.11a 5180MHz-ant0)


Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 7.4V		



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	37.2854	40.10	-16.10	24.00	40.00	-16.00	QP
2	40.9880	40.15	-15.75	24.40	40.00	-15.60	QP
3	57.1914	37.86	-17.16	20.70	40.00	-19.30	QP
4 *	70.8315	49.19	-19.05	30.14	40.00	-9.86	QP
5	207.8500	44.96	-19.14	25.82	43.50	-17.68	QP
6	176.2684	41.94	-17.45	24.49	43.50	-19.01	QP



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 7.4V		

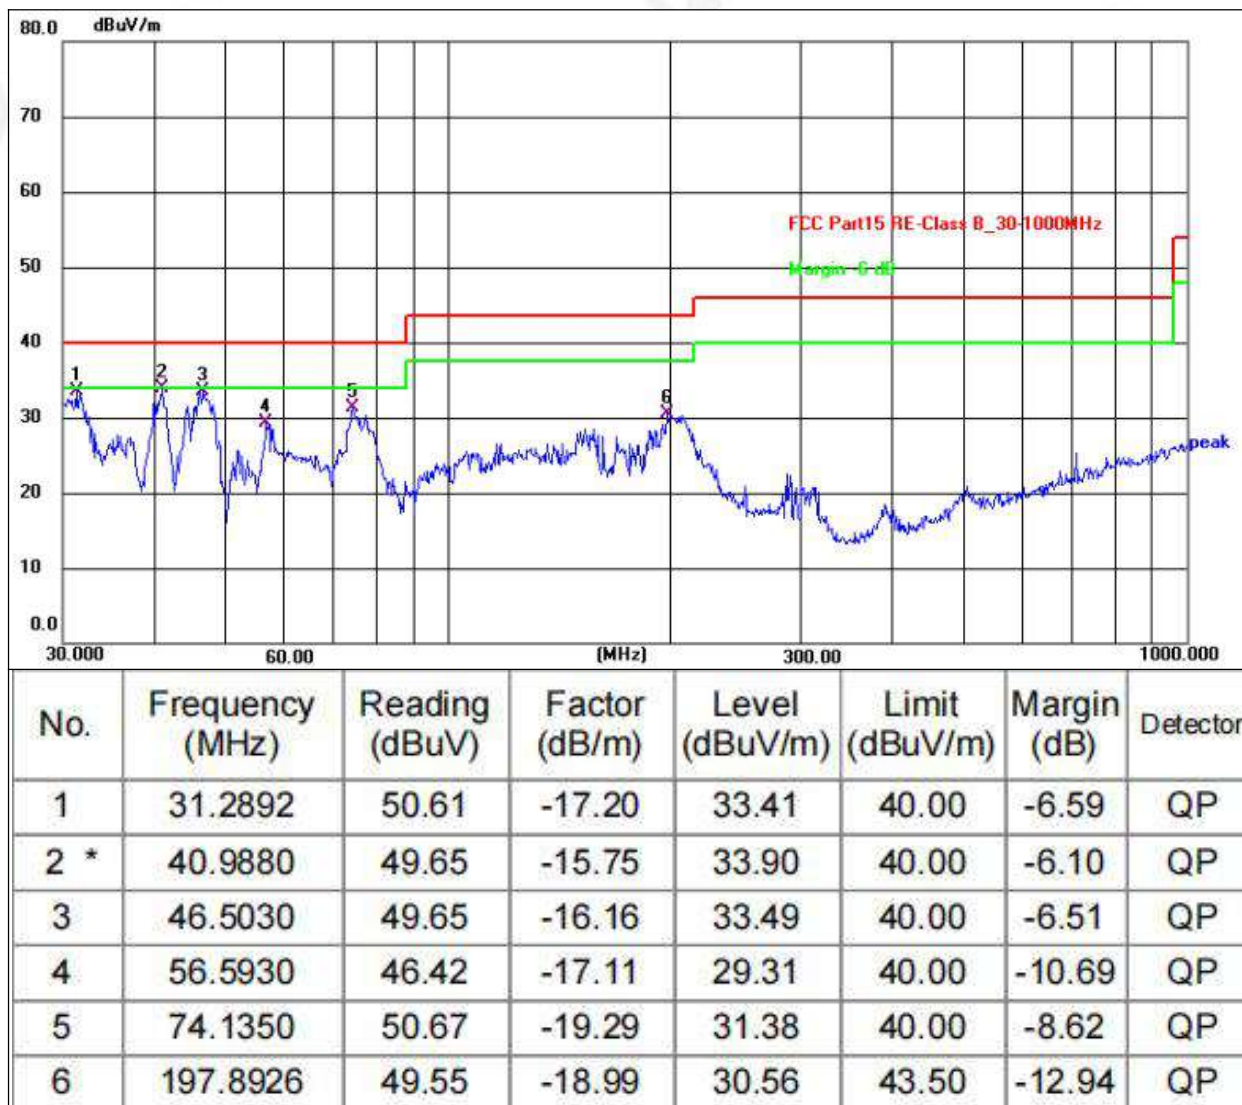



(Worst case 802.11a 5180MHz-ant0)

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	37.0326	41.63	-16.14	25.49	40.00	-14.51	QP
2	41.0007	41.15	-15.75	25.40	40.00	-14.60	QP
3 *	70.8923	48.19	-19.05	29.14	40.00	-10.86	QP
4	77.6666	47.34	-20.18	27.16	40.00	-12.84	QP
5	114.2664	42.70	-18.65	24.05	43.50	-19.45	QP
6	205.3497	46.65	-19.11	27.54	43.50	-15.96	QP



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.1052	48.05	-17.45	30.60	40.00	-9.40	QP
2	41.0007	45.15	-15.75	29.40	40.00	-10.60	QP
3	46.6870	45.79	-16.19	29.60	40.00	-10.40	QP
4	56.6290	47.42	-17.11	30.31	40.00	-9.69	QP
5 *	74.2022	50.67	-19.30	31.37	40.00	-8.63	QP
6	196.8797	50.65	-18.96	31.69	43.50	-11.81	QP

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.The test data shows only the worst case 802.11n20 5180mode



Between 1GHz – 40GHz

Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	5.2G TX- 802.11a/n20/ac 20(Worst case)		

802.11a ANT0

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Low Channel:5180MHz									
V	10360.00	51.52	30.55	5.77	24.66	51.40	74.00	-22.60	PK
V	10360.00	43.56	30.55	5.77	24.66	43.44	54.00	-10.56	AV
V	15540.00	53.93	30.33	6.32	24.55	54.47	74.00	-19.53	PK
V	15540.00	43.62	30.33	6.32	24.55	44.16	54.00	-9.84	AV
V	20720.00	54.87	30.85	7.45	24.69	56.16	74.00	-17.84	PK
V	20720.00	43.21	30.85	7.45	24.69	44.50	54.00	-9.50	AV
V	25900.00	52.80	31.02	8.99	25.57	56.34	74.00	-17.66	PK
V	25900.00	43.50	31.02	8.99	25.57	47.04	54.00	-6.96	AV
H	10360.00	52.12	30.55	5.77	24.66	52.00	74.00	-22.00	PK
H	10360.00	43.18	30.55	5.77	24.66	43.06	54.00	-10.94	AV
H	15540.00	52.89	30.33	6.32	24.55	53.43	74.00	-20.57	PK
H	15540.00	43.06	30.33	6.32	24.55	43.60	54.00	-10.40	AV
H	20720.00	53.28	30.85	7.45	24.69	54.57	74.00	-19.43	PK
H	20720.00	43.44	30.85	7.45	24.69	44.73	54.00	-9.27	AV
H	25900.00	54.94	31.02	8.99	25.57	58.48	74.00	-15.52	PK
H	25900.00	43.04	31.02	8.99	25.57	46.58	54.00	-7.42	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Middle Channel:5200MHz									
V	10400.00	53.55	30.55	5.77	24.66	53.43	74.00	-20.57	PK
V	10400.00	43.53	30.55	5.77	24.66	43.41	54.00	-10.59	AV
V	15600.00	53.46	30.33	6.32	24.55	54.00	74.00	-20.00	PK
V	15600.00	43.16	30.33	6.32	24.55	43.70	54.00	-10.30	AV
V	20800.00	53.05	30.85	7.45	24.69	54.34	74.00	-19.66	PK
V	20800.00	43.88	30.85	7.45	24.69	45.17	54.00	-8.83	AV
V	26000.00	51.64	31.02	8.99	25.57	55.18	74.00	-18.82	PK
V	26000.00	43.25	31.02	8.99	25.57	46.79	54.00	-7.21	AV
H	10400.00	54.77	30.55	5.77	24.66	54.65	74.00	-19.35	PK
H	10400.00	43.36	30.55	5.77	24.66	43.24	54.00	-10.76	AV
H	15600.00	54.61	30.33	6.32	24.55	55.15	74.00	-18.85	PK
H	15600.00	43.87	30.33	6.32	24.55	44.41	54.00	-9.59	AV
H	20800.00	53.25	30.85	7.45	24.69	54.54	74.00	-19.46	PK
H	20800.00	44.00	30.85	7.45	24.69	45.29	54.00	-8.71	AV
H	26000.00	51.88	31.02	8.99	25.57	55.42	74.00	-18.58	PK
H	26000.00	43.23	31.02	8.99	25.57	46.77	54.00	-7.23	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5240MHz									
V	10480.00	50.49	30.55	5.77	24.66	50.37	74.00	-23.63	PK
V	10480.00	43.10	30.55	5.77	24.66	42.98	54.00	-11.02	AV
V	15720.00	54.59	30.33	6.32	24.55	55.13	74.00	-18.87	PK
V	15720.00	43.83	30.33	6.32	24.55	44.37	54.00	-9.63	AV
V	20960.00	54.16	30.85	7.45	24.69	55.45	74.00	-18.55	PK
V	20960.00	43.25	30.85	7.45	24.69	44.54	54.00	-9.46	AV
V	26200.00	53.54	31.02	8.99	25.57	57.08	74.00	-16.92	PK
V	26200.00	43.89	31.02	8.99	25.57	47.43	54.00	-6.57	AV
H	10480.00	54.93	30.55	5.77	24.66	54.81	74.00	-19.19	PK
H	10480.00	43.19	30.55	5.77	24.66	43.07	54.00	-10.93	AV
H	15720.00	53.94	30.33	6.32	24.55	54.48	74.00	-19.52	PK
H	15720.00	43.11	30.33	6.32	24.55	43.65	54.00	-10.35	AV
H	20960.00	50.67	30.85	7.45	24.69	51.96	74.00	-22.04	PK
H	20960.00	43.60	30.85	7.45	24.69	44.89	54.00	-9.11	AV
H	26200.00	53.14	31.02	8.99	25.57	56.68	74.00	-17.32	PK
H	26200.00	43.67	31.02	8.99	25.57	47.21	54.00	-6.79	AV



802.11n20 MIMO

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:5180MHz									
V	10360.00	51.05	30.55	5.77	24.66	50.93	74.00	-23.07	PK
V	10360.00	43.55	30.55	5.77	24.66	43.43	54.00	-10.57	AV
V	15540.00	54.37	30.33	6.32	24.55	54.91	74.00	-19.09	PK
V	15540.00	43.71	30.33	6.32	24.55	44.25	54.00	-9.75	AV
V	20720.00	50.55	30.85	7.45	24.69	51.84	74.00	-22.16	PK
V	20720.00	43.33	30.85	7.45	24.69	44.62	54.00	-9.38	AV
V	25900.00	51.11	31.02	8.99	25.57	54.65	74.00	-19.35	PK
V	25900.00	43.96	31.02	8.99	25.57	47.50	54.00	-6.50	AV
H	10360.00	54.24	30.55	5.77	24.66	54.12	74.00	-19.88	PK
H	10360.00	43.30	30.55	5.77	24.66	43.18	54.00	-10.82	AV
H	15540.00	53.32	30.33	6.32	24.55	53.86	74.00	-20.14	PK
H	15540.00	43.23	30.33	6.32	24.55	43.77	54.00	-10.23	AV
H	20720.00	50.81	30.85	7.45	24.69	52.10	74.00	-21.90	PK
H	20720.00	43.83	30.85	7.45	24.69	45.12	54.00	-8.88	AV
H	25900.00	53.24	31.02	8.99	25.57	56.78	74.00	-17.22	PK
H	25900.00	43.01	31.02	8.99	25.57	46.55	54.00	-7.45	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:5200MHz									
V	10400.00	50.91	30.55	5.77	24.66	50.79	74.00	-23.21	PK
V	10400.00	43.09	30.55	5.77	24.66	42.97	54.00	-11.03	AV
V	15600.00	52.84	30.33	6.32	24.55	53.38	74.00	-20.62	PK
V	15600.00	43.55	30.33	6.32	24.55	44.09	54.00	-9.91	AV
V	20800.00	54.59	30.85	7.45	24.69	55.88	74.00	-18.12	PK
V	20800.00	43.91	30.85	7.45	24.69	45.20	54.00	-8.80	AV
V	26000.00	53.83	31.02	8.99	25.57	57.37	74.00	-16.63	PK
V	26000.00	43.35	31.02	8.99	25.57	46.89	54.00	-7.11	AV
H	10400.00	50.74	30.55	5.77	24.66	50.62	74.00	-23.38	PK
H	10400.00	43.78	30.55	5.77	24.66	43.66	54.00	-10.34	AV
H	15600.00	50.21	30.33	6.32	24.55	50.75	74.00	-23.25	PK
H	15600.00	43.53	30.33	6.32	24.55	44.07	54.00	-9.93	AV
H	20800.00	54.75	30.85	7.45	24.69	56.04	74.00	-17.96	PK
H	20800.00	43.88	30.85	7.45	24.69	45.17	54.00	-8.83	AV
H	26000.00	52.21	31.02	8.99	25.57	55.75	74.00	-18.25	PK
H	26000.00	43.90	31.02	8.99	25.57	47.44	54.00	-6.56	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5240MHz									
V	10480.00	50.18	30.55	5.77	24.66	50.06	74.00	-23.94	PK
V	10480.00	43.36	30.55	5.77	24.66	43.24	54.00	-10.76	AV
V	15720.00	50.39	30.33	6.32	24.55	50.93	74.00	-23.07	PK
V	15720.00	43.80	30.33	6.32	24.55	44.34	54.00	-9.66	AV
V	20960.00	51.76	30.85	7.45	24.69	53.05	74.00	-20.95	PK
V	20960.00	43.32	30.85	7.45	24.69	44.61	54.00	-9.39	AV
V	26200.00	50.59	31.02	8.99	25.57	54.13	74.00	-19.87	PK
V	26200.00	43.93	31.02	8.99	25.57	47.47	54.00	-6.53	AV
H	10480.00	53.85	30.55	5.77	24.66	53.73	74.00	-20.27	PK
H	10480.00	43.96	30.55	5.77	24.66	43.84	54.00	-10.16	AV
H	15720.00	50.57	30.33	6.32	24.55	51.11	74.00	-22.89	PK
H	15720.00	43.06	30.33	6.32	24.55	43.60	54.00	-10.40	AV
H	20960.00	53.49	30.85	7.45	24.69	54.78	74.00	-19.22	PK
H	20960.00	43.60	30.85	7.45	24.69	44.89	54.00	-9.11	AV
H	26200.00	51.98	31.02	8.99	25.57	55.52	74.00	-18.48	PK
H	26200.00	43.25	31.02	8.99	25.57	46.79	54.00	-7.21	AV



802.11ac20 MIMO

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:5180MHz									
V	10360.00	50.07	30.55	5.77	24.66	49.95	74.00	-24.05	PK
V	10360.00	43.40	30.55	5.77	24.66	43.28	54.00	-10.72	AV
V	15540.00	53.71	30.33	6.32	24.55	54.25	74.00	-19.75	PK
V	15540.00	43.68	30.33	6.32	24.55	44.22	54.00	-9.78	AV
V	20720.00	51.37	30.85	7.45	24.69	52.66	74.00	-21.34	PK
V	20720.00	43.99	30.85	7.45	24.69	45.28	54.00	-8.72	AV
V	25900.00	52.24	31.02	8.99	25.57	55.78	74.00	-18.22	PK
V	25900.00	43.98	31.02	8.99	25.57	47.52	54.00	-6.48	AV
H	10360.00	51.68	30.55	5.77	24.66	51.56	74.00	-22.44	PK
H	10360.00	43.09	30.55	5.77	24.66	42.97	54.00	-11.03	AV
H	15540.00	52.17	30.33	6.32	24.55	52.71	74.00	-21.29	PK
H	15540.00	43.94	30.33	6.32	24.55	44.48	54.00	-9.52	AV
H	20720.00	52.96	30.85	7.45	24.69	54.25	74.00	-19.75	PK
H	20720.00	43.63	30.85	7.45	24.69	44.92	54.00	-9.08	AV
H	25900.00	53.18	31.02	8.99	25.57	56.72	74.00	-17.28	PK
H	25900.00	43.67	31.02	8.99	25.57	47.21	54.00	-6.79	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:5200MHz									
V	10400.00	54.11	30.55	5.77	24.66	52.23	74.00	-21.77	PK
V	10400.00	43.57	30.55	5.77	24.66	43.48	54.00	-10.52	AV
V	15600.00	53.88	30.33	6.32	24.55	54.16	74.00	-19.84	PK
V	15600.00	43.11	30.33	6.32	24.55	43.66	54.00	-10.34	AV
V	20800.00	52.09	30.85	7.45	24.69	53.63	74.00	-20.37	PK
V	20800.00	43.58	30.85	7.45	24.69	44.52	54.00	-9.48	AV
V	26000.00	50.23	31.02	8.99	25.57	56.82	74.00	-17.18	PK
V	26000.00	43.11	31.02	8.99	25.57	47.86	54.00	-6.14	AV
H	10400.00	54.52	30.55	5.77	24.66	53.14	74.00	-20.86	PK
H	10400.00	43.04	30.55	5.77	24.66	43.13	54.00	-10.87	AV
H	15600.00	50.00	30.33	6.32	24.55	52.82	74.00	-21.18	PK
H	15600.00	43.34	30.33	6.32	24.55	43.19	54.00	-10.81	AV
H	20800.00	54.21	30.85	7.45	24.69	54.46	74.00	-19.54	PK
H	20800.00	43.40	30.85	7.45	24.69	44.82	54.00	-9.18	AV
H	26000.00	53.79	31.02	8.99	25.57	54.88	74.00	-19.12	PK
H	26000.00	43.30	31.02	8.99	25.57	45.75	54.00	-8.25	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5240MHz									
V	10480.00	52.90	30.55	5.77	24.66	52.23	74.00	-21.77	PK
V	10480.00	43.23	30.55	5.77	24.66	43.48	54.00	-10.52	AV
V	15720.00	53.59	30.33	6.32	24.55	54.16	74.00	-19.84	PK
V	15720.00	43.07	30.33	6.32	24.55	43.66	54.00	-10.34	AV
V	20960.00	51.92	30.85	7.45	24.69	53.63	74.00	-20.37	PK
V	20960.00	43.75	30.85	7.45	24.69	44.52	54.00	-9.48	AV
V	26200.00	54.05	31.02	8.99	25.57	56.82	74.00	-17.18	PK
V	26200.00	43.94	31.02	8.99	25.57	47.86	54.00	-6.14	AV
H	10480.00	50.67	30.55	5.77	24.66	53.14	74.00	-20.86	PK
H	10480.00	43.02	30.55	5.77	24.66	43.13	54.00	-10.87	AV
H	15720.00	54.89	30.33	6.32	24.55	52.82	74.00	-21.18	PK
H	15720.00	43.83	30.33	6.32	24.55	43.19	54.00	-10.81	AV
H	20960.00	54.50	30.85	7.45	24.69	54.46	74.00	-19.54	PK
H	20960.00	43.00	30.85	7.45	24.69	44.82	54.00	-9.18	AV
H	26200.00	53.21	31.02	8.99	25.57	54.88	74.00	-19.12	PK
H	26200.00	43.84	31.02	8.99	25.57	45.75	54.00	-8.25	AV



802.11a ANT0

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:5745MHz									
V	11490.00	51.93	30.55	5.77	24.66	51.81	74.00	-22.19	PK
V	11490.00	43.58	30.55	5.77	24.66	43.46	54.00	-10.54	AV
V	17235.00	51.20	30.33	6.32	24.55	51.74	74.00	-22.26	PK
V	17235.00	43.63	30.33	6.32	24.55	44.17	54.00	-9.83	AV
V	22980.00	53.37	30.85	7.45	24.69	54.66	74.00	-19.34	PK
V	22980.00	43.61	30.85	7.45	24.69	44.90	54.00	-9.10	AV
V	28725.00	52.19	31.02	8.99	25.57	55.73	74.00	-18.27	PK
V	28725.00	43.17	31.02	8.99	25.57	46.71	54.00	-7.29	AV
H	11490.00	54.10	30.55	5.77	24.66	53.98	74.00	-20.02	PK
H	11490.00	43.83	30.55	5.77	24.66	43.71	54.00	-10.29	AV
H	17235.00	52.03	30.33	6.32	24.55	52.57	74.00	-21.43	PK
H	17235.00	43.55	30.33	6.32	24.55	44.09	54.00	-9.91	AV
H	22980.00	51.32	30.85	7.45	24.69	52.61	74.00	-21.39	PK
H	22980.00	43.31	30.85	7.45	24.69	44.60	54.00	-9.40	AV
H	28725.00	50.31	31.02	8.99	25.57	53.85	74.00	-20.15	PK
H	28725.00	43.75	31.02	8.99	25.57	47.29	54.00	-6.71	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:5785MHz									
V	11570.00	53.47	30.55	5.77	24.66	53.35	74.00	-20.65	PK
V	11570.00	43.41	30.55	5.77	24.66	43.29	54.00	-10.71	AV
V	17355.00	50.01	30.33	6.32	24.55	50.55	74.00	-23.45	PK
V	17355.00	43.83	30.33	6.32	24.55	44.37	54.00	-9.63	AV
V	23140.00	52.08	30.85	7.45	24.69	53.37	74.00	-20.63	PK
V	23140.00	43.26	30.85	7.45	24.69	44.55	54.00	-9.45	AV
V	28925.00	50.70	31.02	8.99	25.57	54.24	74.00	-19.76	PK
V	28925.00	43.82	31.02	8.99	25.57	47.36	54.00	-6.64	AV
H	11570.00	53.71	30.55	5.77	24.66	53.59	74.00	-20.41	PK
H	11570.00	43.60	30.55	5.77	24.66	43.48	54.00	-10.52	AV
H	17355.00	50.55	30.33	6.32	24.55	51.09	74.00	-22.91	PK
H	17355.00	43.04	30.33	6.32	24.55	43.58	54.00	-10.42	AV
H	23140.00	54.28	30.85	7.45	24.69	55.57	74.00	-18.43	PK
H	23140.00	43.53	30.85	7.45	24.69	44.82	54.00	-9.18	AV
H	28925.00	53.06	31.02	8.99	25.57	56.60	74.00	-17.40	PK
H	28925.00	43.68	31.02	8.99	25.57	47.22	54.00	-6.78	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5825MHz									
V	11650.00	50.66	30.55	5.77	24.66	50.54	74.00	-23.46	PK
V	11650.00	43.56	30.55	5.77	24.66	43.44	54.00	-10.56	AV
V	17475.00	50.69	30.33	6.32	24.55	51.23	74.00	-22.77	PK
V	17475.00	43.66	30.33	6.32	24.55	44.20	54.00	-9.80	AV
V	23300.00	50.22	30.85	7.45	24.69	51.51	74.00	-22.49	PK
V	23300.00	43.50	30.85	7.45	24.69	44.79	54.00	-9.21	AV
V	29125.00	50.27	31.02	8.99	25.57	53.81	74.00	-20.19	PK
V	29125.00	43.46	31.02	8.99	25.57	47.00	54.00	-7.00	AV
H	11650.00	54.62	30.55	5.77	24.66	54.50	74.00	-19.50	PK
H	11650.00	43.38	30.55	5.77	24.66	43.26	54.00	-10.74	AV
H	17475.00	51.72	30.33	6.32	24.55	52.26	74.00	-21.74	PK
H	17475.00	43.27	30.33	6.32	24.55	43.81	54.00	-10.19	AV
H	23300.00	54.88	30.85	7.45	24.69	56.17	74.00	-17.83	PK
H	23300.00	43.74	30.85	7.45	24.69	45.03	54.00	-8.97	AV
H	29125.00	51.79	31.02	8.99	25.57	55.33	74.00	-18.67	PK
H	29125.00	43.19	31.02	8.99	25.57	46.73	54.00	-7.27	AV



802.11n20 MIMO

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:5745MHz									
V	11490.00	53.26	30.55	5.77	24.66	53.14	74.00	-20.86	PK
V	11490.00	43.86	30.55	5.77	24.66	43.74	54.00	-10.26	AV
V	17235.00	50.74	30.33	6.32	24.55	51.28	74.00	-22.72	PK
V	17235.00	43.39	30.33	6.32	24.55	43.93	54.00	-10.07	AV
V	22980.00	50.59	30.85	7.45	24.69	51.88	74.00	-22.12	PK
V	22980.00	43.18	30.85	7.45	24.69	44.47	54.00	-9.53	AV
V	28725.00	54.62	31.02	8.99	25.57	58.16	74.00	-15.84	PK
V	28725.00	43.43	31.02	8.99	25.57	46.97	54.00	-7.03	AV
H	11490.00	50.54	30.55	5.77	24.66	50.42	74.00	-23.58	PK
H	11490.00	43.70	30.55	5.77	24.66	43.58	54.00	-10.42	AV
H	17235.00	53.98	30.33	6.32	24.55	54.52	74.00	-19.48	PK
H	17235.00	43.50	30.33	6.32	24.55	44.04	54.00	-9.96	AV
H	22980.00	54.43	30.85	7.45	24.69	55.72	74.00	-18.28	PK
H	22980.00	43.08	30.85	7.45	24.69	44.37	54.00	-9.63	AV
H	28725.00	54.54	31.02	8.99	25.57	58.08	74.00	-15.92	PK
H	28725.00	43.68	31.02	8.99	25.57	47.22	54.00	-6.78	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:5785MHz									
V	11570.00	53.44	30.55	5.77	24.66	53.32	74.00	-20.68	PK
V	11570.00	43.06	30.55	5.77	24.66	42.94	54.00	-11.06	AV
V	17355.00	52.08	30.33	6.32	24.55	52.62	74.00	-21.38	PK
V	17355.00	43.68	30.33	6.32	24.55	44.22	54.00	-9.78	AV
V	23140.00	52.65	30.85	7.45	24.69	53.94	74.00	-20.06	PK
V	23140.00	43.92	30.85	7.45	24.69	45.21	54.00	-8.79	AV
V	28925.00	54.58	31.02	8.99	25.57	58.12	74.00	-15.88	PK
V	28925.00	43.36	31.02	8.99	25.57	46.90	54.00	-7.10	AV
H	11570.00	51.62	30.55	5.77	24.66	51.50	74.00	-22.50	PK
H	11570.00	43.48	30.55	5.77	24.66	43.36	54.00	-10.64	AV
H	17355.00	53.78	30.33	6.32	24.55	54.32	74.00	-19.68	PK
H	17355.00	43.75	30.33	6.32	24.55	44.29	54.00	-9.71	AV
H	23140.00	53.79	30.85	7.45	24.69	55.08	74.00	-18.92	PK
H	23140.00	43.58	30.85	7.45	24.69	44.87	54.00	-9.13	AV
H	28925.00	54.95	31.02	8.99	25.57	58.49	74.00	-15.51	PK
H	28925.00	43.67	31.02	8.99	25.57	47.21	54.00	-6.79	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5825MHz									
V	11650.00	54.78	30.55	5.77	24.66	54.66	74.00	-19.34	PK
V	11650.00	43.15	30.55	5.77	24.66	43.03	54.00	-10.97	AV
V	17475.00	53.65	30.33	6.32	24.55	54.19	74.00	-19.81	PK
V	17475.00	43.67	30.33	6.32	24.55	44.21	54.00	-9.79	AV
V	23300.00	51.50	30.85	7.45	24.69	52.79	74.00	-21.21	PK
V	23300.00	43.38	30.85	7.45	24.69	44.67	54.00	-9.33	AV
V	29125.00	54.44	31.02	8.99	25.57	57.98	74.00	-16.02	PK
V	29125.00	43.38	31.02	8.99	25.57	46.92	54.00	-7.08	AV
H	11650.00	54.01	30.55	5.77	24.66	53.89	74.00	-20.11	PK
H	11650.00	43.95	30.55	5.77	24.66	43.83	54.00	-10.17	AV
H	17475.00	51.92	30.33	6.32	24.55	52.46	74.00	-21.54	PK
H	17475.00	43.05	30.33	6.32	24.55	43.59	54.00	-10.41	AV
H	23300.00	51.52	30.85	7.45	24.69	52.81	74.00	-21.19	PK
H	23300.00	43.55	30.85	7.45	24.69	44.84	54.00	-9.16	AV
H	29125.00	50.39	31.02	8.99	25.57	53.93	74.00	-20.07	PK
H	29125.00	43.70	31.02	8.99	25.57	47.24	54.00	-6.76	AV



802.11ac20 MIMO

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:5745MHz									
V	11490.00	53.65	30.55	5.77	24.66	53.53	74.00	-20.47	PK
V	11490.00	43.08	30.55	5.77	24.66	42.96	54.00	-11.04	AV
V	17235.00	51.53	30.33	6.32	24.55	52.07	74.00	-21.93	PK
V	17235.00	43.48	30.33	6.32	24.55	44.02	54.00	-9.98	AV
V	22980.00	54.81	30.85	7.45	24.69	56.10	74.00	-17.90	PK
V	22980.00	43.73	30.85	7.45	24.69	45.02	54.00	-8.98	AV
V	28725.00	52.29	31.02	8.99	25.57	55.83	74.00	-18.17	PK
V	28725.00	43.69	31.02	8.99	25.57	47.23	54.00	-6.77	AV
H	11490.00	50.55	30.55	5.77	24.66	50.43	74.00	-23.57	PK
H	11490.00	43.39	30.55	5.77	24.66	43.27	54.00	-10.73	AV
H	17235.00	54.02	30.33	6.32	24.55	54.56	74.00	-19.44	PK
H	17235.00	43.07	30.33	6.32	24.55	43.61	54.00	-10.39	AV
H	22980.00	54.40	30.85	7.45	24.69	55.69	74.00	-18.31	PK
H	22980.00	43.29	30.85	7.45	24.69	44.58	54.00	-9.42	AV
H	28725.00	50.65	31.02	8.99	25.57	54.19	74.00	-19.81	PK
H	28725.00	43.63	31.02	8.99	25.57	47.17	54.00	-6.83	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:5785MHz									
V	11570.00	51.97	30.55	5.77	24.66	52.23	74.00	-21.77	PK
V	11570.00	43.06	30.55	5.77	24.66	43.48	54.00	-10.52	AV
V	17355.00	51.21	30.33	6.32	24.55	54.16	74.00	-19.84	PK
V	17355.00	43.06	30.33	6.32	24.55	43.66	54.00	-10.34	AV
V	23140.00	50.80	30.85	7.45	24.69	53.63	74.00	-20.37	PK
V	23140.00	43.86	30.85	7.45	24.69	44.52	54.00	-9.48	AV
V	28925.00	52.04	31.02	8.99	25.57	56.82	74.00	-17.18	PK
V	28925.00	43.76	31.02	8.99	25.57	47.86	54.00	-6.14	AV
H	11570.00	51.89	30.55	5.77	24.66	53.14	74.00	-20.86	PK
H	11570.00	43.40	30.55	5.77	24.66	43.13	54.00	-10.87	AV
H	17355.00	54.13	30.33	6.32	24.55	52.82	74.00	-21.18	PK
H	17355.00	43.24	30.33	6.32	24.55	43.19	54.00	-10.81	AV
H	23140.00	52.75	30.85	7.45	24.69	54.46	74.00	-19.54	PK
H	23140.00	43.70	30.85	7.45	24.69	44.82	54.00	-9.18	AV
H	28925.00	54.64	31.02	8.99	25.57	54.88	74.00	-19.12	PK
H	28925.00	43.61	31.02	8.99	25.57	45.75	54.00	-8.25	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5825MHz									
V	11650.00	51.70	30.55	5.77	24.66	52.23	74.00	-21.77	PK
V	11650.00	43.05	30.55	5.77	24.66	43.48	54.00	-10.52	AV
V	17475.00	53.33	30.33	6.32	24.55	54.16	74.00	-19.84	PK
V	17475.00	43.85	30.33	6.32	24.55	43.66	54.00	-10.34	AV
V	23300.00	54.99	30.85	7.45	24.69	53.63	74.00	-20.37	PK
V	23300.00	43.38	30.85	7.45	24.69	44.52	54.00	-9.48	AV
V	29125.00	51.66	31.02	8.99	25.57	56.82	74.00	-17.18	PK
V	29125.00	43.84	31.02	8.99	25.57	47.86	54.00	-6.14	AV
H	11650.00	52.87	30.55	5.77	24.66	53.14	74.00	-20.86	PK
H	11650.00	43.96	30.55	5.77	24.66	43.13	54.00	-10.87	AV
H	17475.00	54.63	30.33	6.32	24.55	52.82	74.00	-21.18	PK
H	17475.00	43.14	30.33	6.32	24.55	43.19	54.00	-10.81	AV
H	23300.00	51.54	30.85	7.45	24.69	54.46	74.00	-19.54	PK
H	23300.00	43.68	30.85	7.45	24.69	44.82	54.00	-9.18	AV
H	29125.00	50.26	31.02	8.99	25.57	54.88	74.00	-19.12	PK
H	29125.00	43.91	31.02	8.99	25.57	45.75	54.00	-8.25	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

4.-27dBm(EIRP)=68.3dBuV/m(Field strength at 3m), According to the test results of the above table, while fulfill the requirements of out-of-band spurious



5. POWER SPECTRAL DENSITY TEST

5.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407(3)&RSS 247 section 6.2.1.1/6.2.4.1

Power limits For FCC:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.



5.2 TEST PROCEDURE

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- Set $VBW \geq 3 RBW$.
- If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas RBW (< 500 KHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since RBW=100 KHz is available on nearly all spectrum analyzers.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST METHOD

KDB662911 D01 MULTIPLE TRANSMITTER OUTPUT V02R01
KDB789033 D02 GENERAL U-NII TEST PROCEDURES NEW RULES V02R01, SECTION F

5.5 TEST SETUP



5.6 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.



5.7 TEST RESULTS

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1015 hPa	Test Voltage:	DC 7.4V
Test Mode :	TX		

Band	Operation mode	CH	Power Spectral Density (dBm/MHz)			Limit dBm/MHz
			ANT0	ANT1	Total	
U-NII-1	802.11a	Low	1.63	1.67	/	11
		Middle	1.48	1.83	/	11
		High	1.22	1.06	/	11
	802.11n(HT20)	Low	0.99	0.71	3.86	10.99
		Middle	0.89	1.18	4.05	10.99
		High	0.38	0.38	3.39	10.99
	802.11ac(HT20)	Low	0.91	-0.08	3.45	10.99
		Middle	0.76	0.11	3.46	10.99
		High	0.53	-0.61	3.01	10.99

If support MIMO, Direction Gain=antenna gain+10*log(X)=3+3.01=6.01(X is the number of antennas, it is should be 2)

Band	Operation mode	CH	Power Spectral Density (dBm/0.5Mhz)		
			ANT0	ANT1	Total
U-NII-3	802.11a	Low	-1.71	-1.77	/
		Middle	-1.22	-0.94	/
		High	-2.59	-2.59	/
	802.11n(HT20)	Low	-1.29	-1.48	1.63
		Middle	-0.84	-0.92	2.13
		High	-2.42	-2.38	0.61
	802.11ac(HT20)	Low	-1.53	-1.55	1.47
		Middle	-0.79	-1.04	2.10
		High	-2.27	-2.6	0.58

All OBW test data for 5180-5240MHz are fall within the 5150-5250 MHz band
Only 802.11n/ac(HT20) support MIMO
Duty cycle Factor=0



ANT 0

802.11a U-NII-1 Low channel



802.11n(HT20) U-NII-1 Low channel



802.11a U-NII-1 Middle channel



802.11n(HT20) U-NII-1 Middle channel



802.11a U-NII-1 High channel



802.11n(HT20) U-NII-1 High channel





802.11ac(HT20) U-NII-1 Low channel



802.11n(HT20) U-NII-1 Middle channel



802.11ac(HT20) U-NII-1 High channel





ANT 0

802.11a U-NII-3 Low channel



802.11n(HT20) U-NII-3 Low channel



802.11a U-NII-3 Middle channel



802.11n(HT20) U-NII-3 Middle channel



802.11a U-NII-3 High channel



802.11n(HT20) U-NII-3 High channel





802.11ac(HT20) U-NII-3 Low channel



802.11n(HT20) U-NII-3 Middle channel



802.11ac(HT20) U-NII-3 High channel





ANT 1

802.11a U-NII-1 Low channel



802.11n(HT20) U-NII-1 Low channel



802.11a U-NII-1 Middle channel



802.11n(HT20) U-NII-1 Middle channel



802.11a U-NII-1 High channel



802.11n(HT20) U-NII-1 High channel





802.11ac(HT20) U-NII-1 Low channel



802.11ac(HT20) U-NII-1 Middle channel



802.11ac(HT20) U-NII-1 High channel





ANT 1

802.11a U-NII-3 Low channel



802.11n(HT20) U-NII-3 Low channel



802.11a U-NII-3 Middle channel



802.11n(HT20) U-NII-3 Middle channel



802.11a U-NII-3 High channel



802.11n(HT20) U-NII-3 High channel





802.11ac(HT20) U-NII-3 Low channel



802.11ac(HT20) U-NII-3 Middle channel



802.11ac(HT20) U-NII-3 High channel





6.26DB & 6DB & 99% EMISSION BANDWIDTH

6.1 APPLIED PROCEDURES / LIMIT

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band, the minimum bandwidth 6 dB bandwidth of U-NII devices shall be at least 500KHz. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

IC BW Limit

Frequency band 5725-5850 MHz:

For equipment operating in the band 5725-5850 MHz, the minimum 6 dB bandwidth shall be at least 500 kHz.

Frequency band 5150-5250 MHz

The 26 dB bandwidth may fall into the 5250-5350 MHz band; however, if the occupied bandwidth also falls within the 5250-5350 MHz band, the transmission is considered as intentional and the devices shall comply with all requirements in the band 5250-5350 MHz including implementing dynamic frequency selection (DFS) and TPC, on the portion of the emission that resides in the 5250-5350 MHz band.



6.2 TEST PROCEDURE

- a) Set RBW = 100KHz.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.



6.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.4 TEST RESULTS



Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Test Voltage :	DC 7.4V
Test Mode :	TX		

ANT 0

Band	Operation mode	26 dB Bandwidth (MHz)			99% Bandwidth (MHz)		
		Low	Middle	High	Low	Middle	High
U-NII-1 (ANT0)	802.11a	23.27	25.08	19.95	16.571	16.601	16.516
	802.11n(HT20)	27.29	25.70	20.11	17.855	17.782	17.679
	802.11ac(HT20)	24.07	27.27	20.20	17.799	17.767	17.712

Band	Operation mode	26 dB Bandwidth (MHz)			99% Bandwidth (MHz)		
		Low	Middle	High	Low	Middle	High
U-NII-3 (ANT0)	802.11a	25.45	20.27	25.60	16.612	16.477	16.615
	802.11n(HT20)	25.48	20.81	24.52	17.78	17.65	17.794
	802.11ac(HT20)	25.60	21.17	24.08	17.817	17.675	17.79

ANT 1


Band	Operation mode	26 dB Bandwidth (MHz)			99% Bandwidth (MHz)		
		Low	Middle	High	Low	Middle	High
U-NII-1 (ANT1)	802.11a	24.23	24.29	20.04	16.645	16.599	16.553
	802.11n(HT20)	23.88	25.31	20.01	17.792	17.744	17.662
	802.11ac(HT20)	24.05	26.99	20.19	17.773	17.786	17.694

Band	Operation mode	26 dB Bandwidth (MHz)			99% Bandwidth (MHz)		
		Low	Middle	High	Low	Middle	High
U-NII-3 (ANT1)	802.11a	24.32	20.26	24.65	16.615	16.484	16.62
	802.11n(HT20)	25.97	21.11	24.49	17.742	17.692	17.796
	802.11ac(HT20)	25.34	21.38	25.93	17.778	17.665	17.773



Test plot Antenna 0


802.11a U-NII-1 Low channel

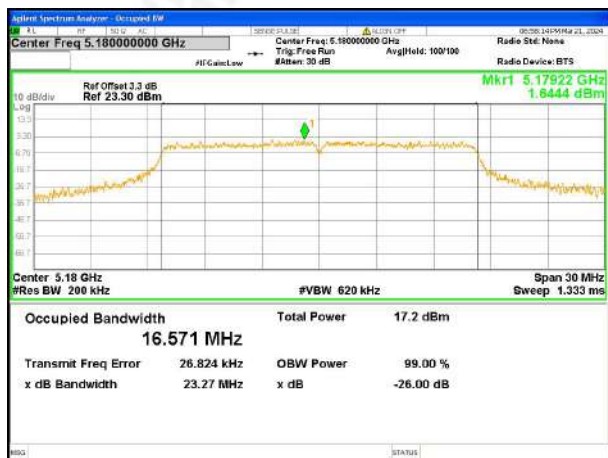

802.11n(HT20) U-NII-1 Low channel



802.11a U-NII-1 Middle channel

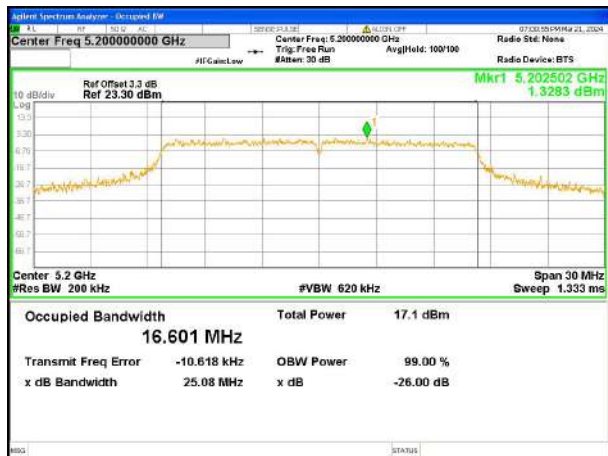

802.11n(HT20) U-NII-1 Middle channel



802.11a U-NII-1 High channel



802.11n(HT20) U-NII-1 High channel





802.11ac(HT20) U-NII-1 Low channel



802.11ac(HT20) U-NII-1 Middle channel



802.11ac(HT20) U-NII-1 High channel





Test plot Antenna 0


802.11a U-NII-3 Low channel



802.11n(HT20) U-NII-3 Low channel



802.11a U-NII-3 Middle channel

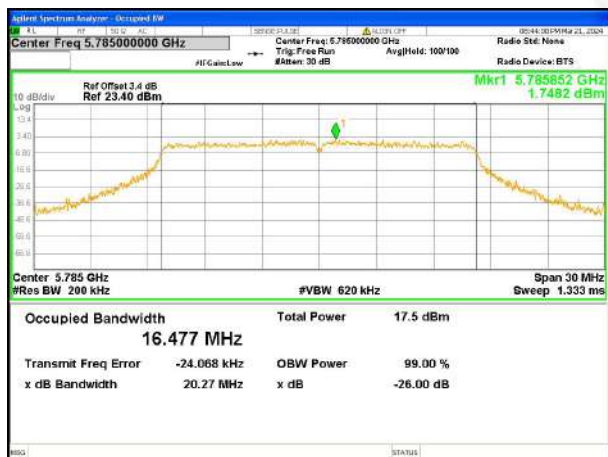

802.11n(HT20) U-NII-3 Middle channel



802.11a U-NII-3 High channel



802.11n(HT20) U-NII-3 High channel






802.11ac(HT20) U-NII-3 Low channel



802.11ac(HT20) U-NII-3 Middle channel




802.11ac(HT20) U-NII-3 High channel

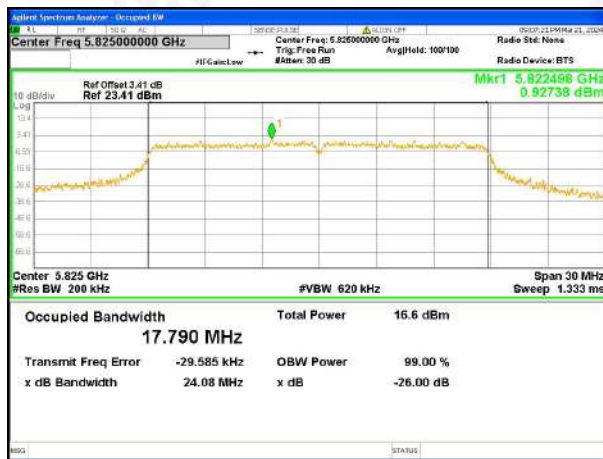



Test plot Antenna 1


802.11a U-NII-1 Low channel

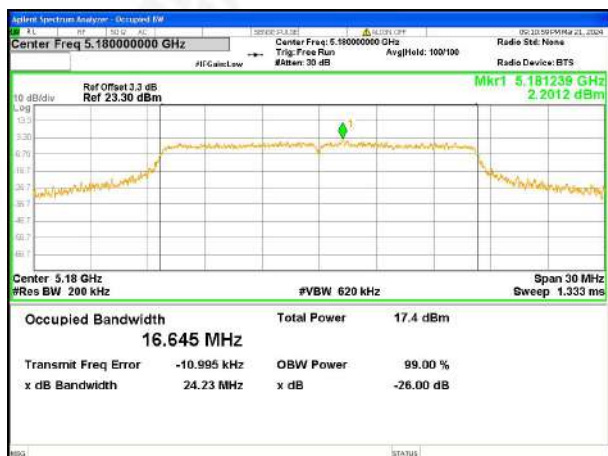

802.11n(HT20) U-NII-1 Low channel



802.11a U-NII-1 Middle channel

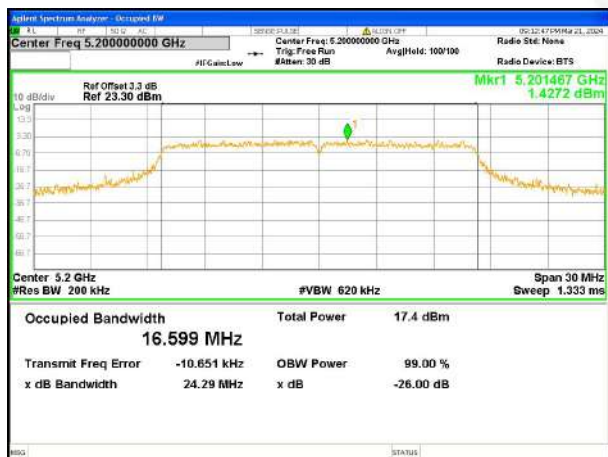

802.11n(HT20) U-NII-1 Middle channel



802.11a U-NII-1 High channel




802.11n(HT20) U-NII-1 High channel






802.11ac(HT20) U-NII-1 Low channel

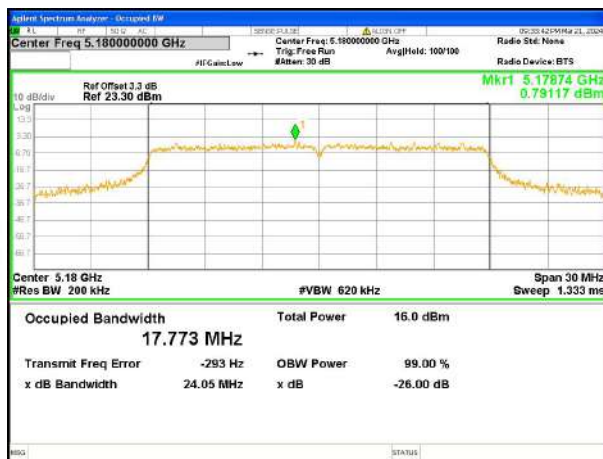

802.11ac(HT20) U-NII-1 Middle channel

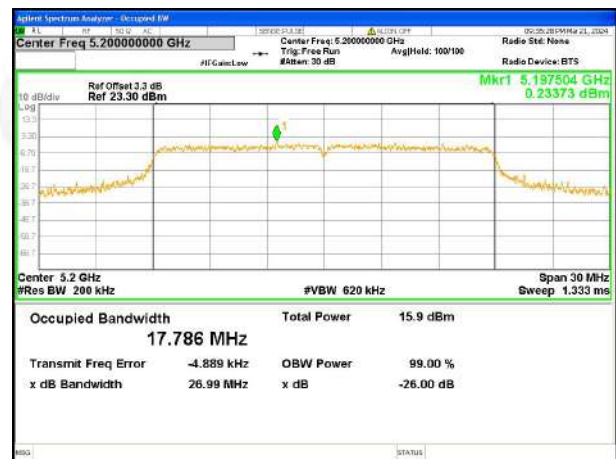

802.11ac(HT20) U-NII-1 High channel





Test plot Antenna 1


802.11a U-NII-3 Low channel



802.11n(HT20) U-NII-3 Low channel



802.11a U-NII-3 Middle channel

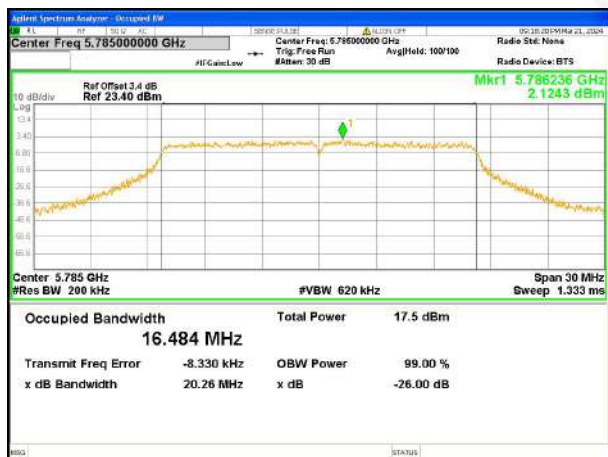

802.11n(HT20) U-NII-3 Middle channel



802.11a U-NII-3 High channel



802.11n(HT20) U-NII-3 High channel






802.11ac(HT20) U-NII-3 Low channel



802.11ac(HT20) U-NII-3 Middle channel



802.11ac(HT20) U-NII-3 High channel

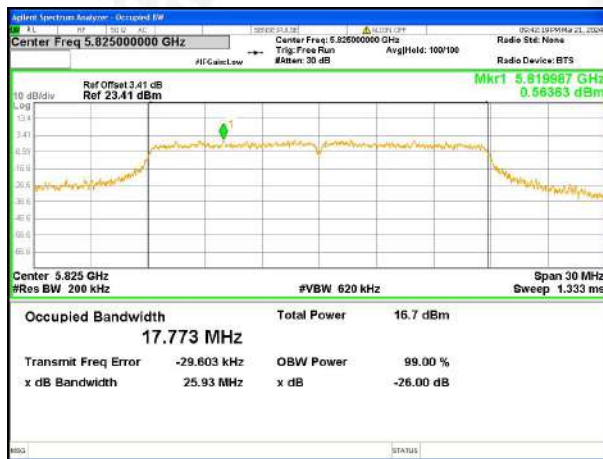



ANT 0

Band	Operation mode	-6dB Channel Bandwidth (MHz)			Limit(KHz)
		Low	Middle	High	>500
U-NII-3 (ANT0)	802.11a	16.30	16.29	15.86	
	802.11n(HT20)	17.52	17.07	17.57	
	802.11ac(HT20)	17.58	17.56	17.16	


ANT 1

Band	Operation mode	-6dB Channel Bandwidth (MHz)			Limit(KHz)
		Low	Middle	High	>500
U-NII-3 (ANT1)	802.11a	16.29	16.30	16.27	
	802.11n(HT20)	17.55	17.55	17.53	
	802.11ac(HT20)	17.59	16.61	17.17	



Test plot Antenna 0

802.11a U-NII-3 Low channel

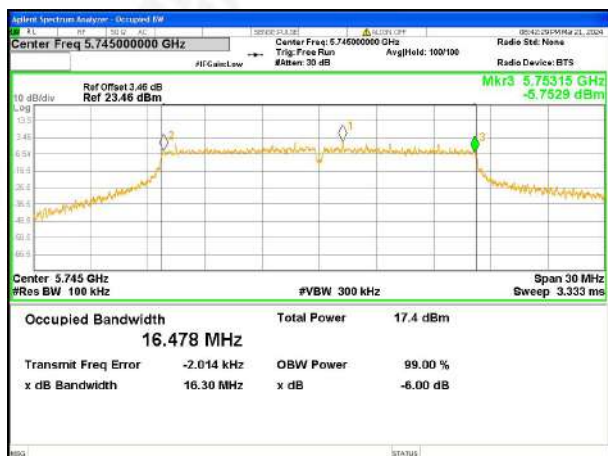


802.11n(HT20) U-NII-3 Low channel



802.11a U-NII-3 Middle channel



802.11n(HT20) U-NII-3 Middle channel

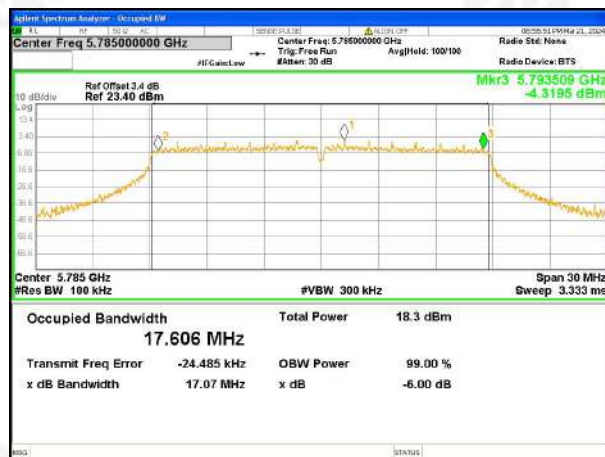

802.11a U-NII-3 High channel



802.11n(HT20) U-NII-3 High channel






802.11ac(HT20) U-NII-3 Low channel



802.11ac(HT20) U-NII-3 Middle channel



802.11ac(HT20) U-NII-3 High channel

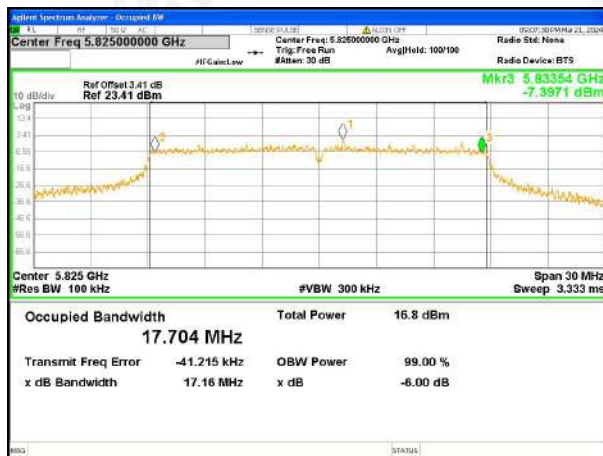




Test plot Antenna 1

802.11a U-NII-3 Low channel



802.11n(HT20) U-NII-3 Low channel

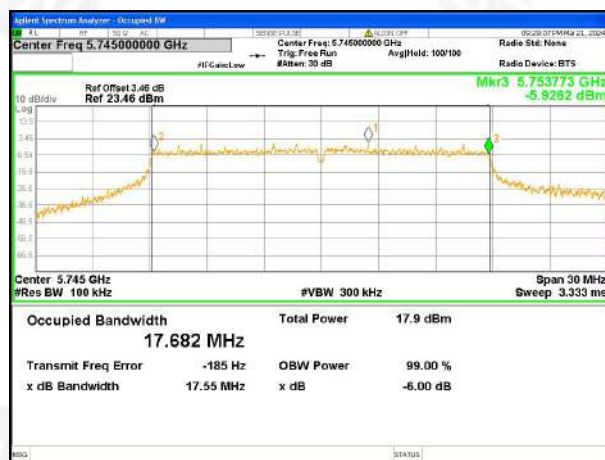

802.11a U-NII-3 Middle channel




802.11n(HT20) U-NII-3 Middle channel



802.11a U-NII-3 High channel



802.11n(HT20) U-NII-3 High channel

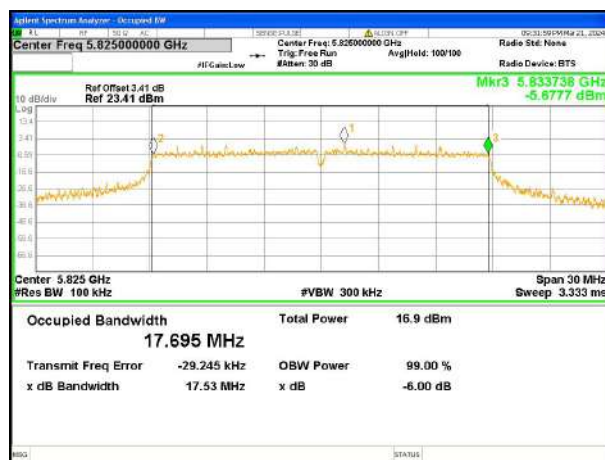



802.11ac(HT20) U-NII-3 Low channel



802.11ac(HT20) U-NII-3 Middle channel



802.11ac(HT20) U-NII-3 High channel





7. MAXIMUM CONDUCTED OUTPUT POWER

7.1 PPLIED PROCEDURES / LIMIT

According to FCC §15.407&RSS 247 section 6.2.1.1/6.2.4.1
The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	250mW
5725-5850	1W

7.2 TEST PROCEDURE

The EUT was directly connected to the Power meter

1. Device Configuration

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level (see section II.B.).

a) The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (to no lower than 98 percent) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

b) If continuous transmission (or at least 98 percent duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level with the transmit duration as long as possible and the duty cycle as high as possible.

2. Measurement using a Spectrum Analyzer or EMI Receiver (SA)

Measurement of maximum conducted output power using a spectrum analyzer requires integrating the spectrum across a frequency span that encompasses, at a minimum, either the EBW or the 99-percent occupied bandwidth of the signal. However, the EBW must be used to determine bandwidth dependent limits on maximum conducted output power in accordance with § 15.407(a).

a) The test method shall be selected as follows: (i) Method SA-1 or SA-1 Alternative (averaging with the EUT transmitting at full power throughout each sweep) shall be applied if either of the following conditions can be satisfied:

- The EUT transmits continuously (or with a duty cycle ≥ 98 percent).
- Sweep triggering or gating can be implemented in a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the analyzer configured as in Method SA-1, below) is equal to or shorter than the duration T of each transmission from the EUT and if those transmissions exhibit full power throughout their durations.

(ii) Method SA-2 or SA-2 Alternative (averaging across on and off times of the EUT transmissions, followed by duty cycle correction) shall be applied if the conditions of (i) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than ± 2 percent.

(iii) Method SA-3 (RMS detection with max hold) or SA-3 Alternative (reduced VBW with max hold) shall be applied if the conditions of (i) and (ii) cannot be achieved.

b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep): (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1 MHz.

(iii) Set VBW ≥ 3 MHz.

(iv) Number of points in sweep ≥ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.



(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



7.6 TEST RESULTS

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1012 hPa	Test Voltage :	DC 7.4V
Test Mode :	TX		

Band	Operation mode	CH	Conducted Output Power (dBm)			Limit dBm/MHz
			ANT0	ANT1	Total	
U-NII-1	802.11a	Low	11.57	11.77	/	24
		Middle	11.49	11.71	/	24
		High	11.58	11.48	/	24
	802.11n(HT20)	Low	11.24	11.22	14.24	23.99
		Middle	11.31	11.23	14.28	23.99
		High	11.03	10.93	13.99	23.99
	802.11ac(HT20)	Low	11.31	10.24	13.82	23.99
		Middle	11.25	10.21	13.77	23.99
		High	11.04	10.04	13.58	23.99
U-NII-3	802.11a	Low	11.5	11.47	/	30
		Middle	11.88	11.89	/	30
		High	10.45	10.44	/	30
	802.11n(HT20)	Low	11.97	11.88	14.94	29.99
		Middle	12.35	12.34	15.36	29.99
		High	10.89	10.94	13.93	29.99
	802.11ac(HT20)	Low	11.94	11.9	14.93	29.99
		Middle	12.35	12.38	15.38	29.99
		High	10.94	10.93	13.95	29.99

Directional Gain Calculations for In-Band Measurements

a) Basic methodology with N_{ANT} transmit antennas, each with the same directional gain G_{ANT} dBi, being driven by N_{ANT} transmitter outputs of equal power. Directional gain is to be computed as follows:

(i) If any transmit signals are correlated with each other,

Directional gain = $G_{ANT} + 10 \log(N_{ANT})$ dBi

(ii) If all transmit signals are completely uncorrelated with each other,

Directional gain = G_{ANT}

802.11a is SISO(transmit signals are completely uncorrelated), 802.11n/ac is MIMO(transmit signals are correlated)

Duty cycle Factor=0

Direction Gain=antenna gain+10*log(X)=3+3.01=6.01(X is the number of antennas, it is should be 2)



8.OUT OF BAND EMISSIONS

8.1 APPLICABLE STANDARD

According to FCC §15.407(b) FCC §15.407&RSS 247 section 6.2.1.2/6.2.4.2

For FCC Limit

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz



8.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

8.3 DEVIATION FROM STANDARD


No deviation.




8.4 TEST SETUP

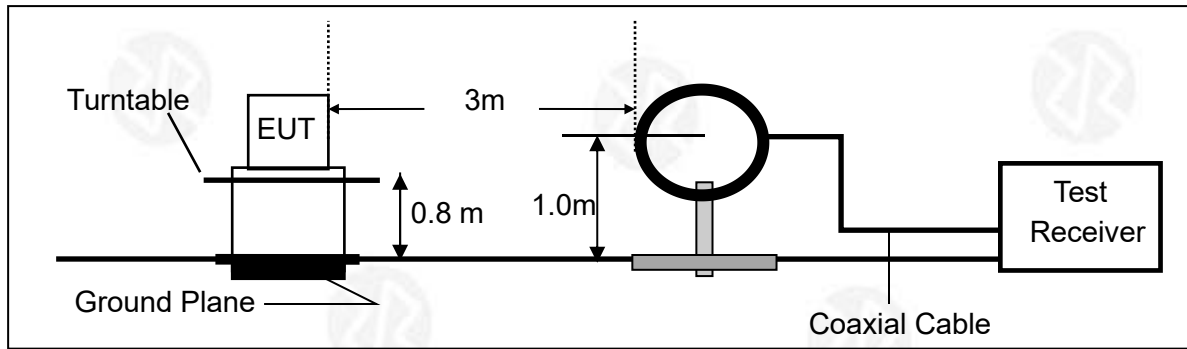

2. For radiated emissions from 30MHz to 1000MHz

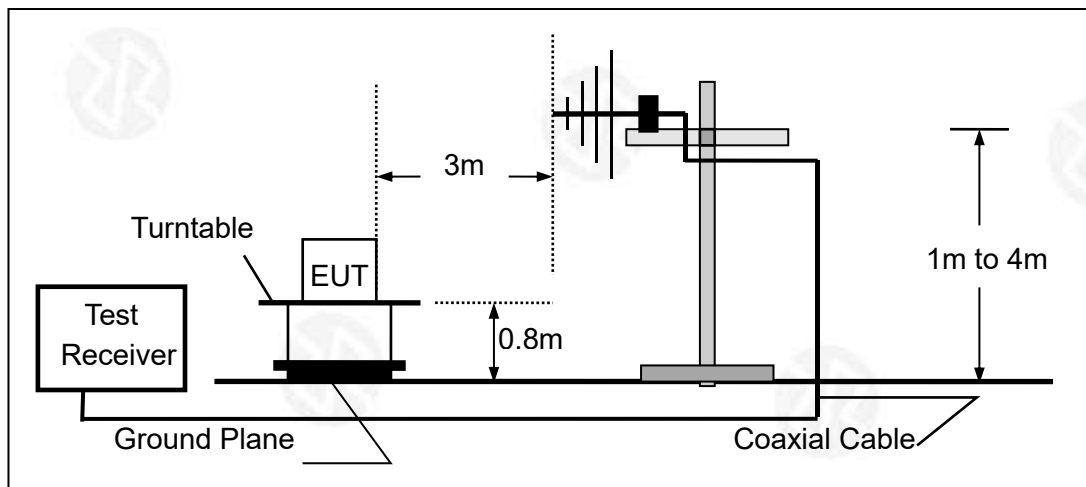

3. Radiated Emission Test-Up Frequency Above 1GHz

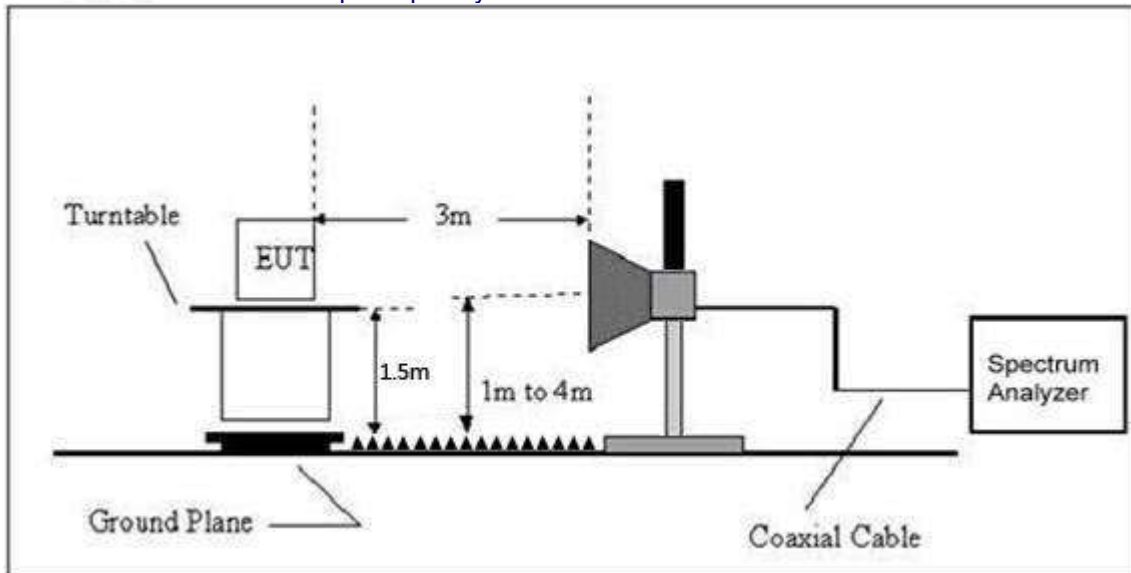

8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



8.6 TEST RESULTS

SISO

Mode	Frequency (MHz)	Antenna	Test Frequency (MHz) Worst Data	Max Value (dBuV/m) Peak	Limit (dBuV/m)	Verdict
a	5180	Ant0	5148.7	53.12	74	Pass
a	5240	Ant0	5414.3	52.002	74	Pass
a	5745	Ant0	5724.8	53.209	74	Pass
a	5825	Ant0	5850.8	53.849	74	Pass
n20	5180	Ant0	5144.5	52.05	74	Pass
n20	5240	Ant0	5355.8	49.237	74	Pass
n20	5745	Ant0	5723.9	51.746	74	Pass
n20	5825	Ant0	5850.4	52.027	74	Pass
ac20	5180	Ant0	5146.3	51.453	74	Pass
ac20	5240	Ant0	5368.3	48.617	74	Pass
ac20	5745	Ant0	5725.1	50.467	74	Pass
ac20	5825	Ant0	5850.0	51.327	74	Pass
a	5180	Ant1	5148.6	53.439	74	Pass
a	5240	Ant1	5403.9	50.049	74	Pass
a	5745	Ant1	5723.6	53.623	74	Pass
a	5825	Ant1	5850.7	52.417	74	Pass
n20	5180	Ant1	5147.5	51.005	74	Pass
n20	5240	Ant1	5408.6	48.719	74	Pass
n20	5745	Ant1	5723.4	52.034	74	Pass
n20	5825	Ant1	5850.2	50.822	74	Pass
ac20	5180	Ant1	5149.7	52.116	74	Pass
ac20	5240	Ant1	5357.5	49.493	74	Pass
ac20	5745	Ant1	5723.6	49.054	74	Pass
ac20	5825	Ant1	5851.2	50.037	74	Pass



MIMO

n20	5745	Ant1	5733.6	53.093	74	Pass
n20	5825	Ant1	5873.7	53.854	74	Pass
ac20	5745	Ant1	5714.1	53.073	74	Pass
ac20	5825	Ant1	5851.2	53.046	74	Pass

Note:-27dBm(EIRP)=68.3dBuV/m(Field strength at 3m), According to the test results of the above table, while fulfill the requirements of out-of-band spurious
Peak Value< AV limit, So the AV value is not record in the report



10. Frequency Stability Measurement

10.1 LIMIT

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

10.2 TEST PROCEDURES

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and max hold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $-20^\circ\text{C} \sim 70^\circ\text{C}$.

10.3 TEST SETUP LAYOUT



10.4 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously un-modulation transmitting mode.

10.5 TEST RESULTS



Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1012 hPa	Test Voltage :	DC 7.4V
Test Mode :	TX		

5.2G

802.11a20

Reference Frequency(Middle Channel): 5200MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
50	15	21	0.00359
40	15	24	0.00428
30	15	32	0.00549
20	15	22	0.0038
10	15	12	0.00212
0	15	32	0.00563
-10	15	24	0.00421
-20	15	22	0.0038
-30	15	12	0.00213

802.11n_HT20

Reference Frequency(Middle Channel): 5200MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
50	15	13	0.00242
40	15	21	0.00359
30	15	32	0.00561
20	15	55	0.00951
10	15	42	0.00716
0	15	32	0.00549
-10	15	24	0.00418
-20	15	22	0.0037
-30	15	12	0.00205



802.11ac_HT20

Reference Frequency(Middle Channel): 5200MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
50	15	13	0.00239
40	15	21	0.00342
30	15	32	0.00553
20	15	55	0.00942
10	15	42	0.00719
0	15	32	0.00508
-10	15	24	0.00436
-20	15	22	0.0037
-30	15	12	0.00232



So, Frequency Stability Versus Input Voltage is:

802.11a20

Reference Frequency(Middle Channel): 5200 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
20	5	44	0.00749
	3.23	43	0.00734
	4.37	42	0.00714

802.11n_HT20

Reference Frequency(Middle Channel): 5200 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
20	5	21	0.00355
	3.23	43	0.00763
	4.37	55	0.00958

802.11ac_HT20

Reference Frequency(Middle Channel): 5200 MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
20	5	21	0.00349
	3.23	43	0.00753
	4.37	55	0.00962



11. DUTY CYCLE

Test Requirement: 47 CFR Part 15E 15.407
KDB789033 D02 General U-NII Test Procedures New Rules v02r01,
Section (B)
Test Method: ANSI C63.10: 2013
Test Limit: N/A
Test Result: PASS
Remark: Through Pre-scan, The duty cycle set for channel low, middle and high are same, and the duty cycle test is performed at channel low only, The report only records the test data of antenna 1

Test Result:

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)
NVNT	a	5180	Ant1	100	0
NVNT	a	5200	Ant1	100	0
NVNT	a	5240	Ant1	100	0
NVNT	a	5745	Ant1	100	0
NVNT	a	5785	Ant1	100	0
NVNT	a	5825	Ant1	100	0
NVNT	n20	5180	Ant1	100	0
NVNT	n20	5200	Ant1	100	0
NVNT	n20	5240	Ant1	100	0
NVNT	n20	5745	Ant1	100	0
NVNT	n20	5785	Ant1	100	0
NVNT	n20	5825	Ant1	100	0
NVNT	ac20	5180	Ant1	100	0
NVNT	ac20	5200	Ant1	100	0
NVNT	ac20	5240	Ant1	100	0
NVNT	ac20	5745	Ant1	100	0
NVNT	ac20	5785	Ant1	100	0
NVNT	ac20	5825	Ant1	100	0



Duty Cycle NVNT a 5180MHz Ant1




Duty Cycle NVNT a 5200MHz Ant1




Duty Cycle NVNT a 5240MHz Ant1



Duty Cycle NVNT a 5745MHz Ant1

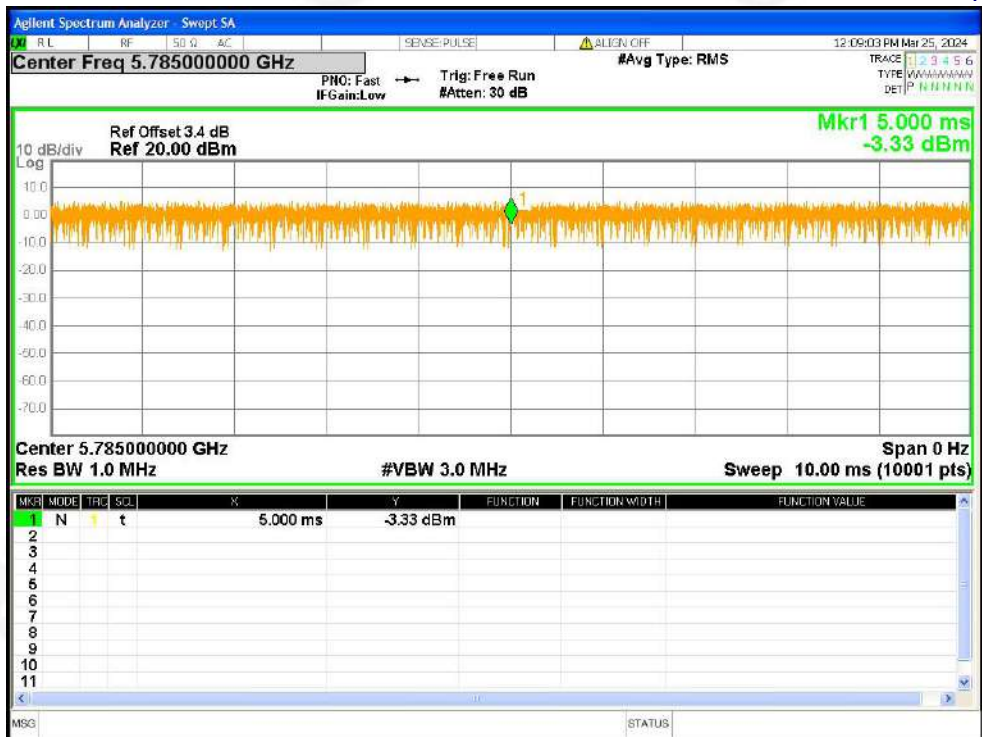


Duty Cycle NVNT a 5785MHz Ant1

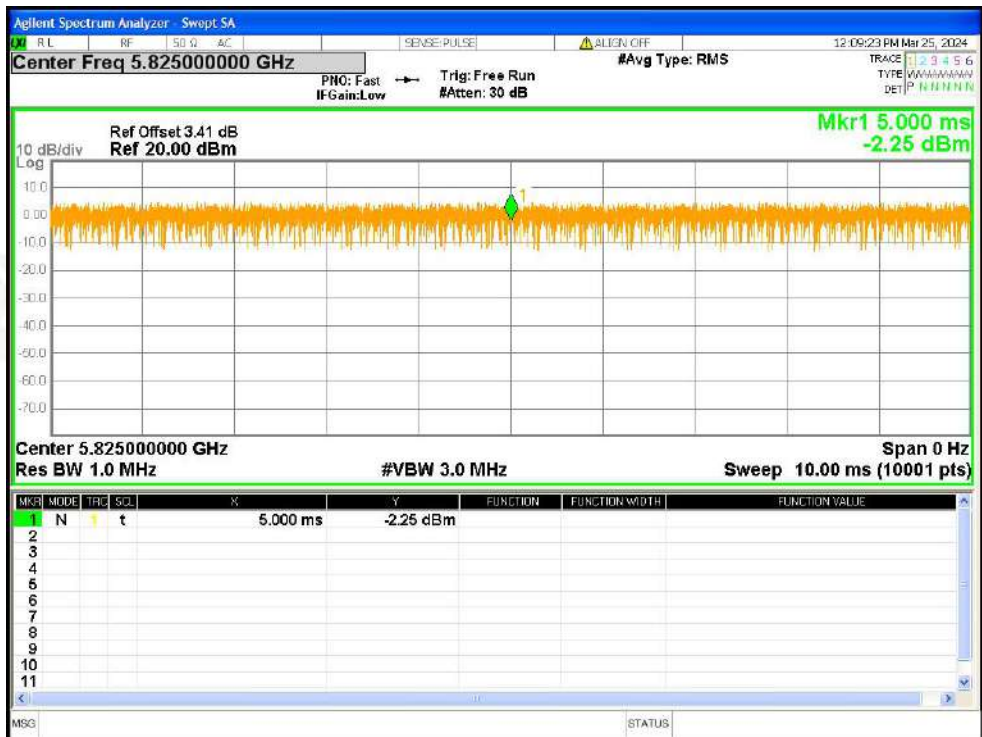

Duty Cycle NVNT a 5825MHz Ant1




Duty Cycle NVNT n20 5180MHz Ant1

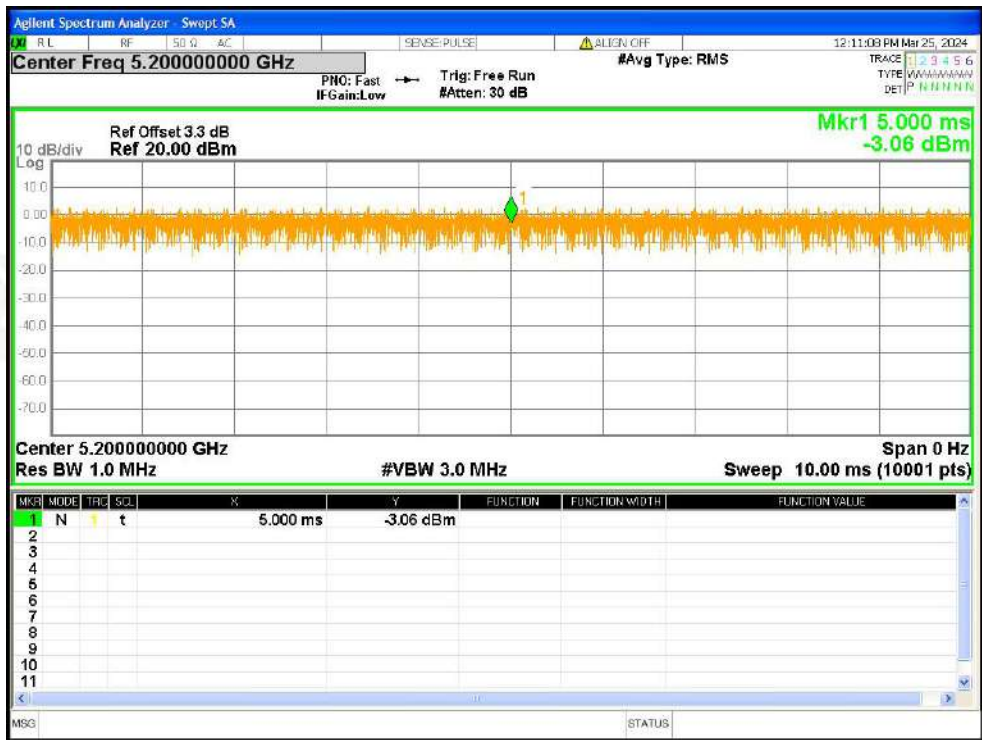


Duty Cycle NVNT n20 5200MHz Ant1



Duty Cycle NVNT n20 5240MHz Ant1

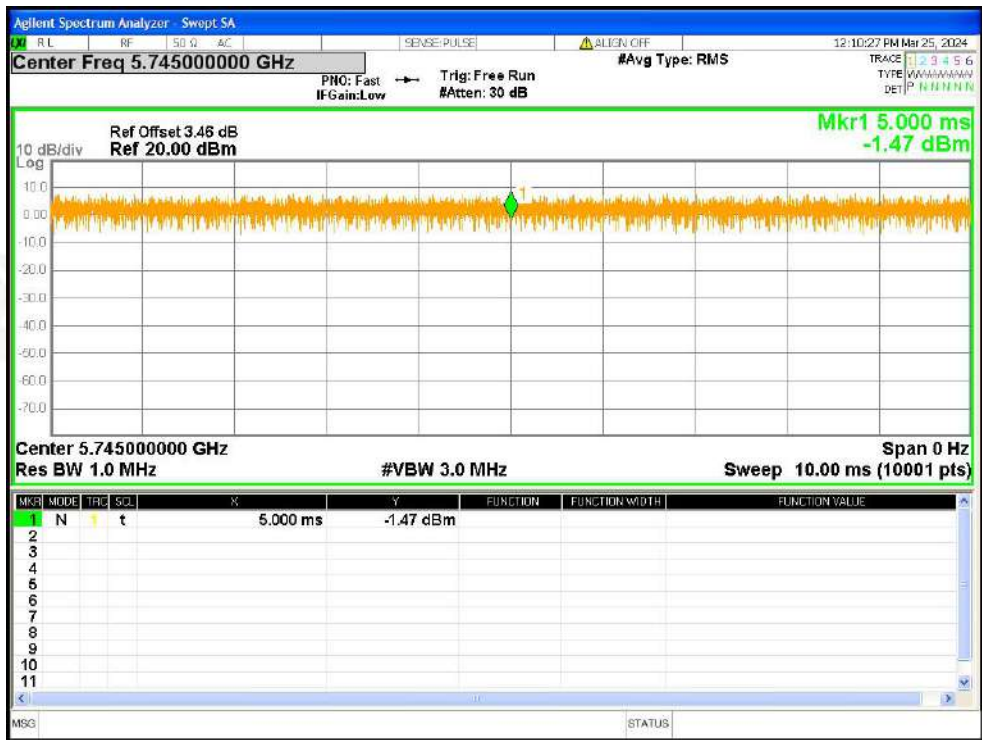

Duty Cycle NVNT n20 5745MHz Ant1

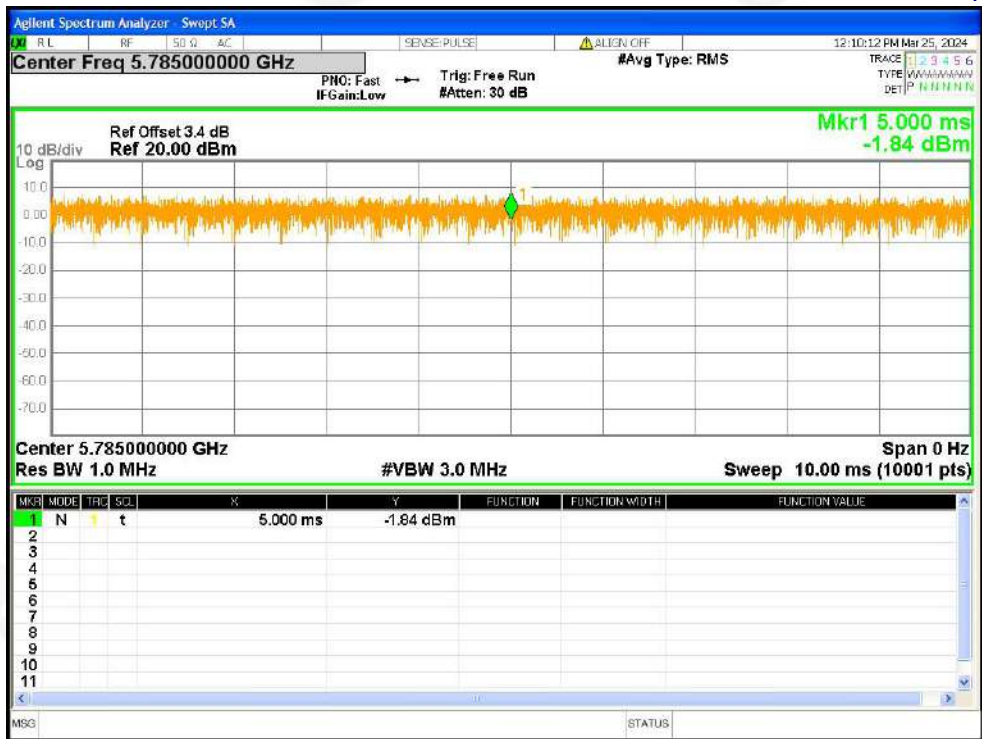


Duty Cycle NVNT n20 5785MHz Ant1



Duty Cycle NVNT n20 5825MHz Ant1



Duty Cycle NVNT ac20 5180MHz Ant1

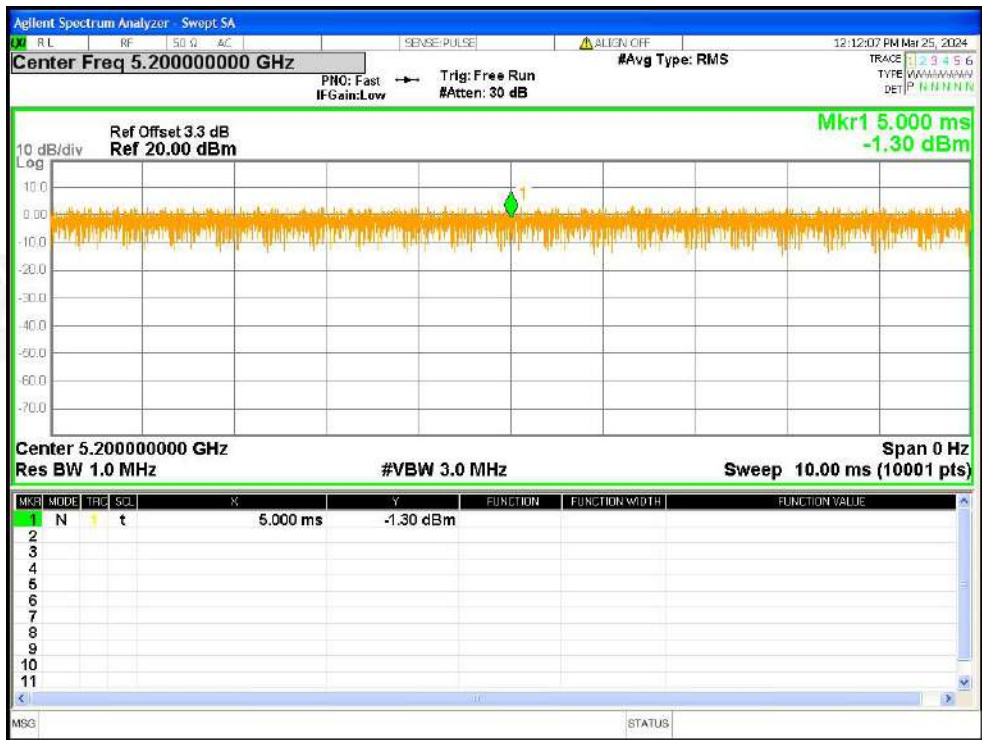

Duty Cycle NVNT ac20 5200MHz Ant1



Duty Cycle NVNT ac20 5240MHz Ant1



Duty Cycle NVNT ac20 5745MHz Ant1



Duty Cycle NVNT ac20 5785MHz Ant1



Duty Cycle NVNT ac20 5825MHz Ant1



12.ANTENNA REQUIREMENT

Standard requirement:	FCC Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. RSS-Gen requirement: According to the RSS-Gen Section 6.8, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This device uses of Two antennas that uses a specified coupling to the intentional radiator. Antenna connectors complied with the requirement.	
EUT Antenna:	
The WIFI 5G antennas are two External detachable non-standard SMA port antennas, the best case gain for two antennas are 3dBi, reference to the appendix II for details	



13. TEST SETUP PHOTO

Reference to the appendix I for details.

14. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

***** END OF REPORT *****