




### Min emission bandwidth


#### Test Result


TestMode	Antenna	Freq(MHz)	6dB EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant5	5745	16.04	5736.84	5752.88	0.5	PASS
		5785	14.44	5778.08	5792.52	0.5	PASS
		5825	15.32	5817.24	5832.56	0.5	PASS
11AC20SISO	Ant5	5745	15.48	5737.08	5752.56	0.5	PASS
		5785	16.80	5776.60	5793.40	0.5	PASS
		5825	16.76	5816.60	5833.36	0.5	PASS
11AC40SISO	Ant5	5755	35.36	5737.24	5772.60	0.5	PASS
		5795	35.36	5777.24	5812.60	0.5	PASS
11AC80SISO	Ant5	5775	75.20	5737.40	5812.60	0.5	PASS




### Test Graphs

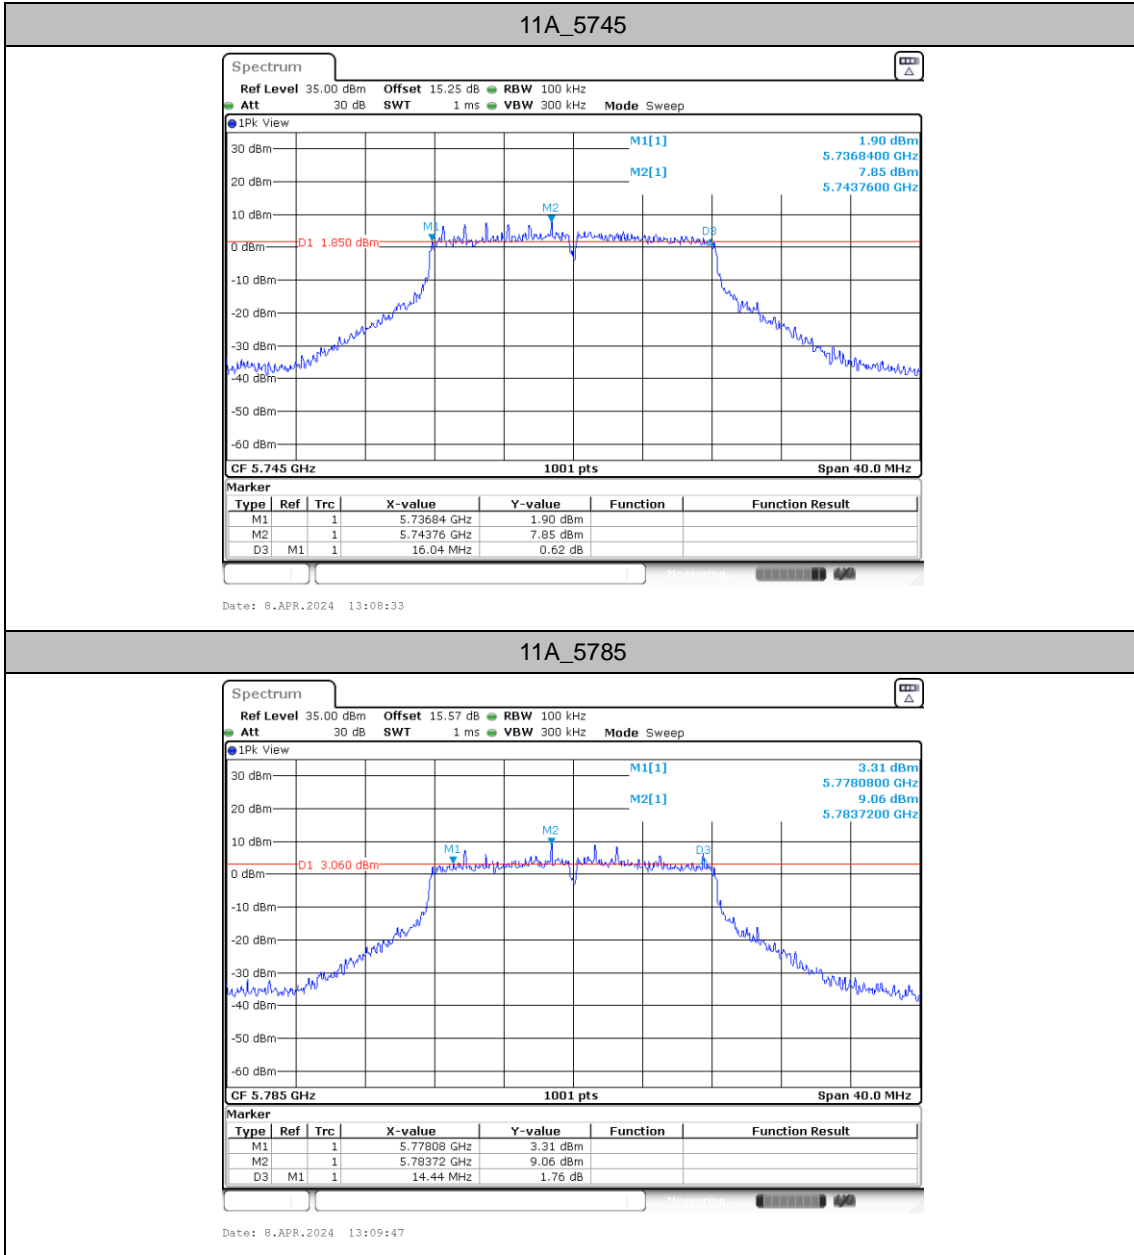


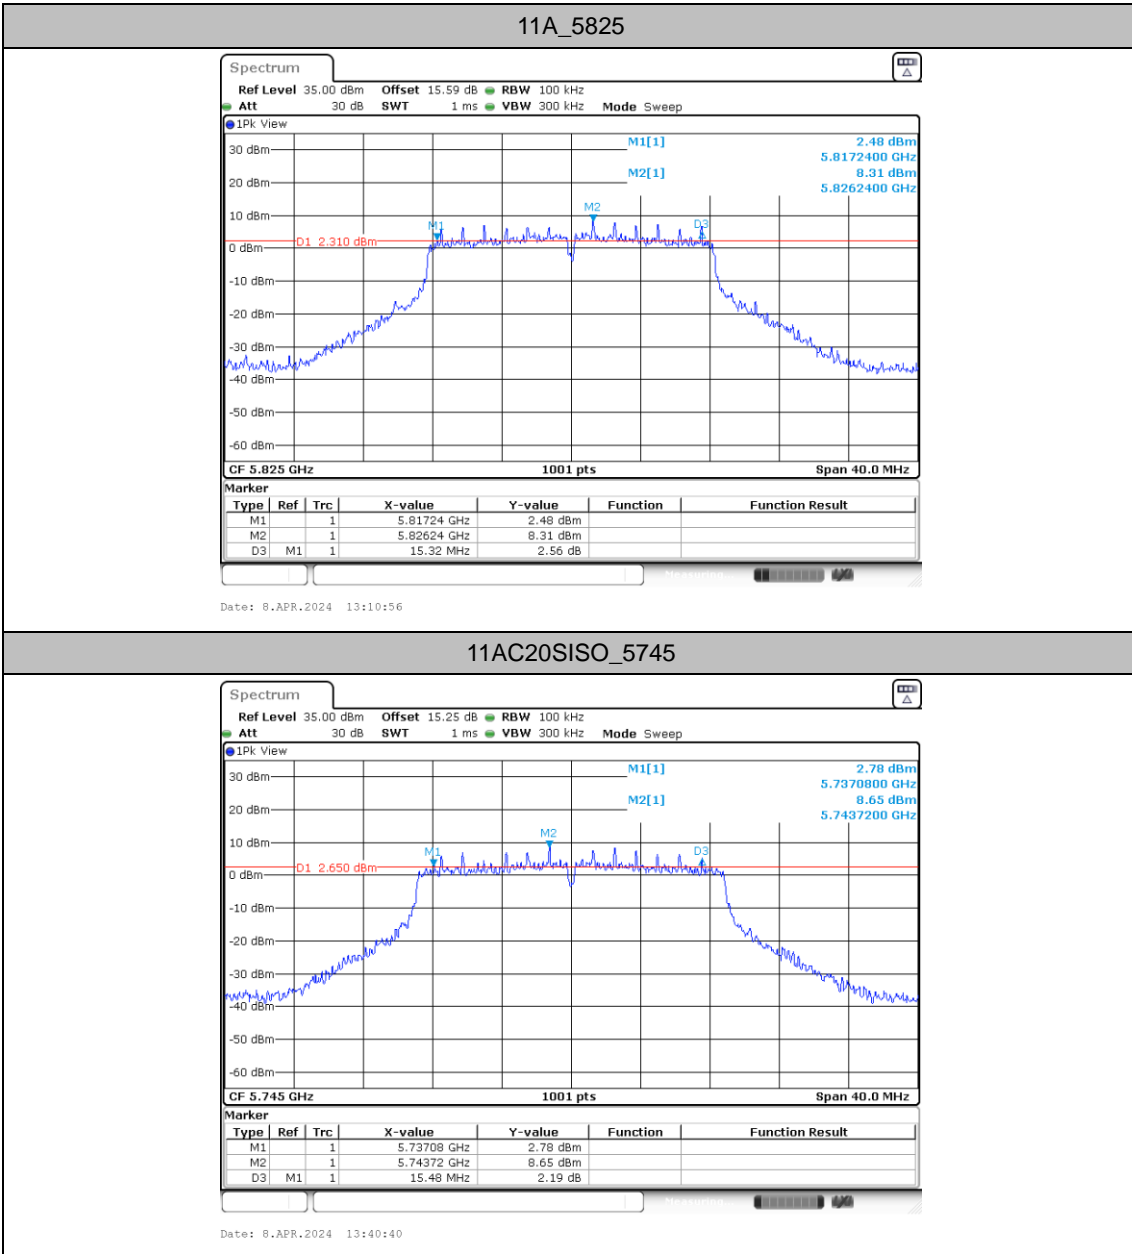

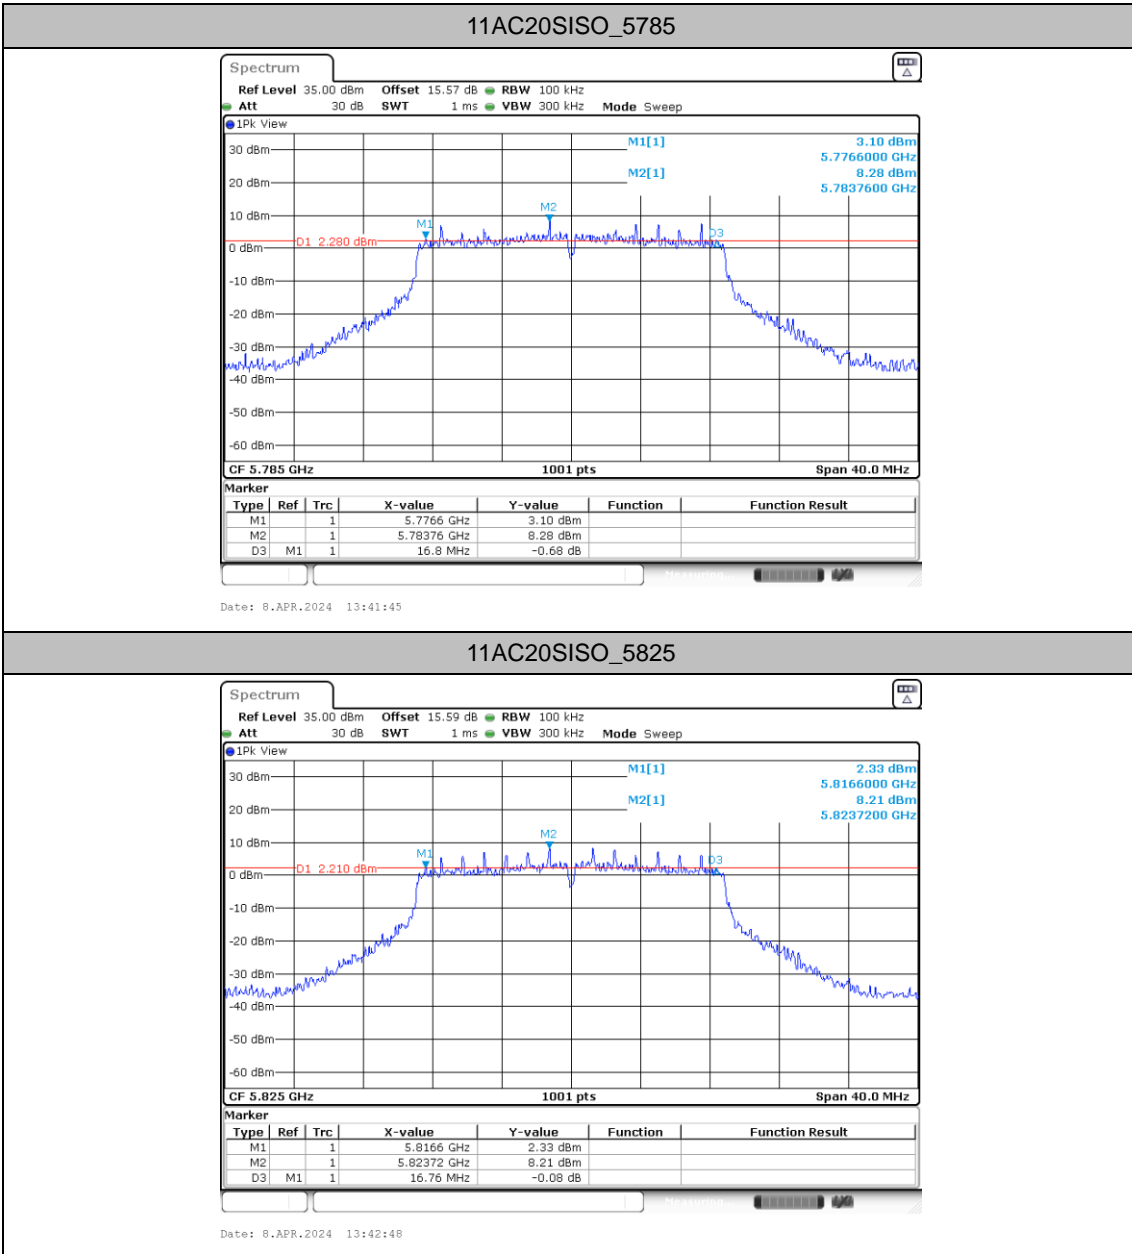

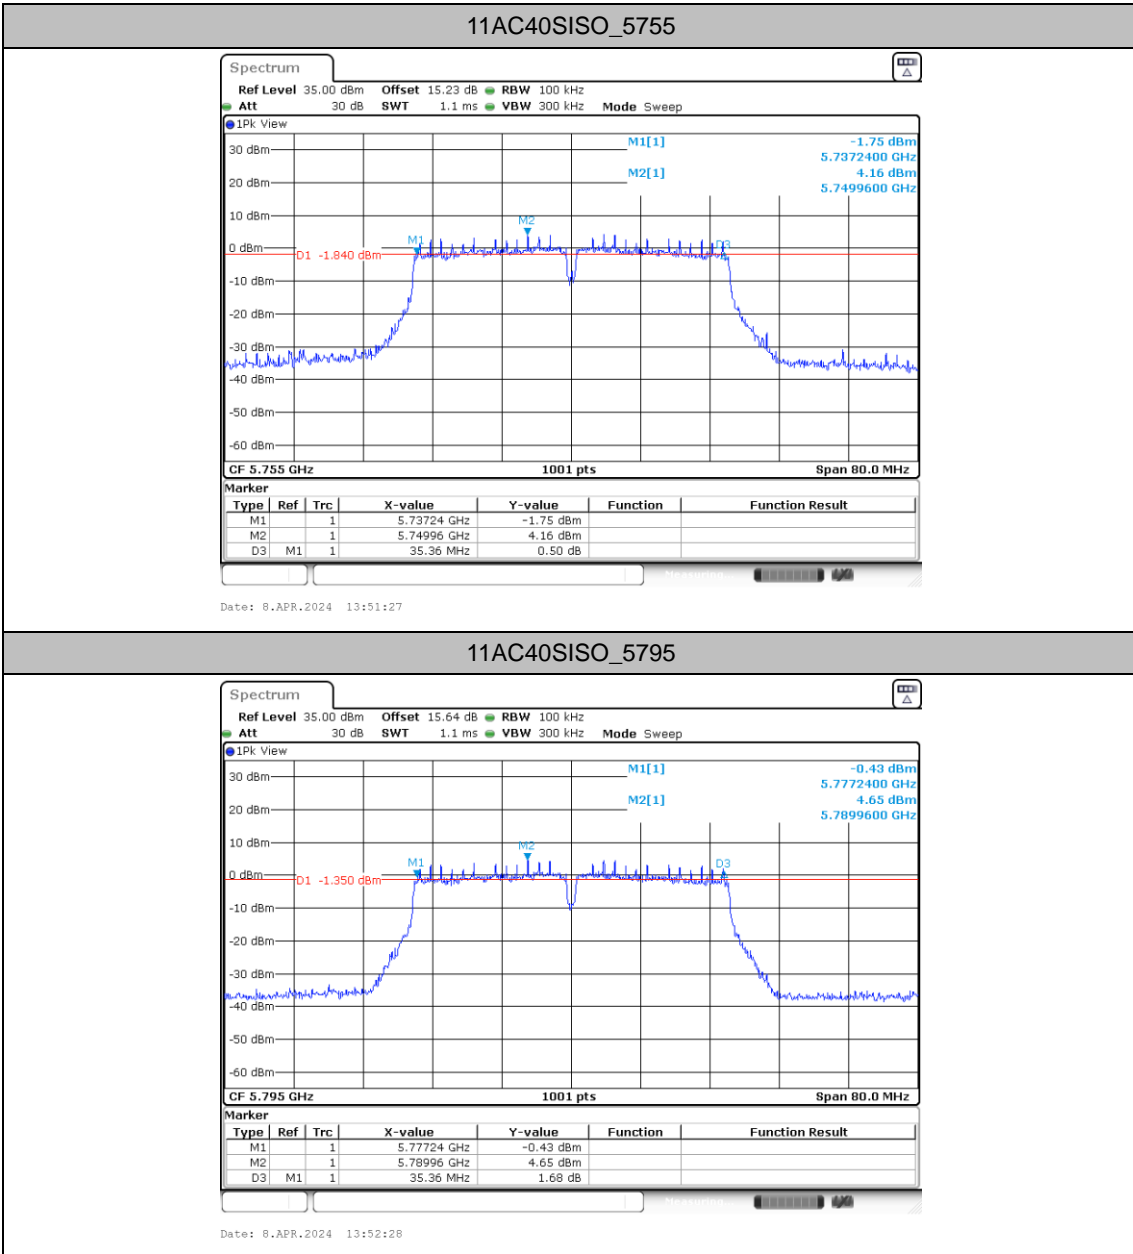



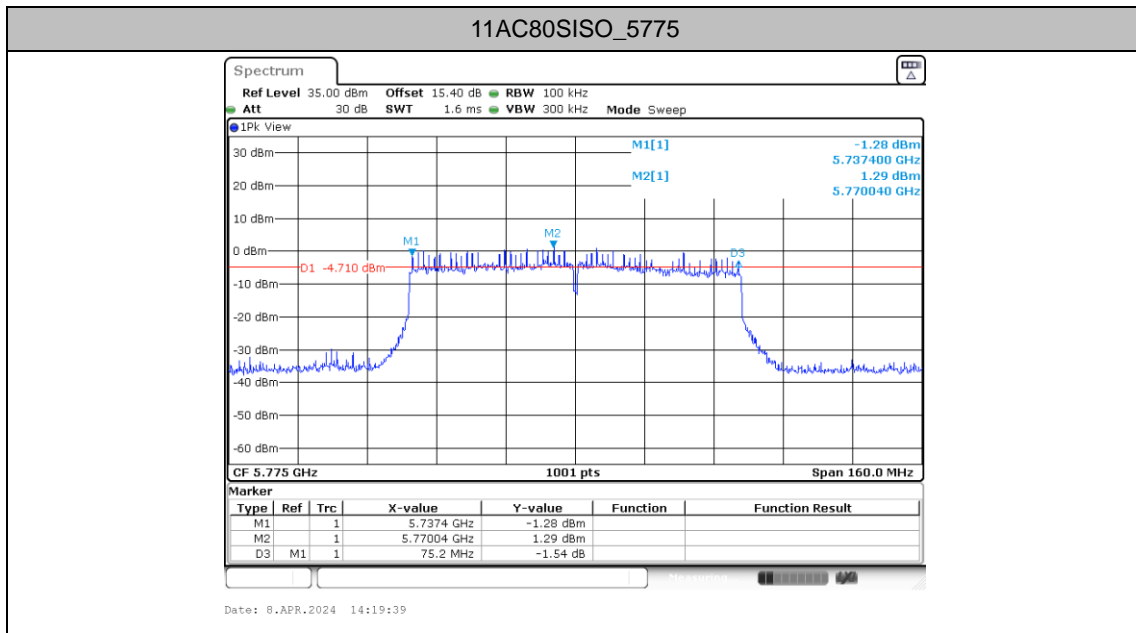



Maximum power spectral density


Test Result


TestMode	Antenna	Freq(MHz)	Result [dBm/MHz]	Limit[dBm/MHz]	Verdict
11A	Ant5	5180	7.91	≤11.00	PASS
		5220	7.19	≤11.00	PASS
		5240	7.73	≤11.00	PASS
		5260	7.57	≤11.00	PASS
		5300	8.24	≤11.00	PASS
		5320	7.78	≤11.00	PASS
		5500	8.31	≤11.00	PASS
		5580	7.98	≤11.00	PASS
		5700	7.75	≤11.00	PASS
		5720_UNII-2C	7.78	≤11.00	PASS
		5720_UNII-3	3.49	≤30.00	PASS
		5745	4.89	≤30.00	PASS
		5785	5.14	≤30.00	PASS
		5825	4.42	≤30.00	PASS
11AC20SISO	Ant5	5180	7.41	≤11.00	PASS
		5220	6.69	≤11.00	PASS
		5240	7.28	≤11.00	PASS
		5260	7.07	≤11.00	PASS
		5300	7.84	≤11.00	PASS
		5320	7.39	≤11.00	PASS
		5500	7.81	≤11.00	PASS
		5580	7.50	≤11.00	PASS
		5700	7.29	≤11.00	PASS
		5720_UNII-2C	7.31	≤11.00	PASS
		5720_UNII-3	3.12	≤30.00	PASS
		5745	4.40	≤30.00	PASS
		5785	4.62	≤30.00	PASS
		5825	3.87	≤30.00	PASS
11AC40SISO	Ant5	5190	3.41	≤11.00	PASS
		5230	3.04	≤11.00	PASS
		5270	2.92	≤11.00	PASS
		5310	3.47	≤11.00	PASS
		5510	3.60	≤11.00	PASS
		5550	3.60	≤11.00	PASS
		5670	3.36	≤11.00	PASS
		5710_UNII-2C	3.32	≤11.00	PASS
		5710_UNII-3	-1.44	≤30.00	PASS
		5755	0.29	≤30.00	PASS
		5795	0.72	≤30.00	PASS
11AC80SISO	Ant5	5210	-0.92	≤11.00	PASS
		5290	-0.42	≤11.00	PASS
		5530	-1.01	≤11.00	PASS
		5610	-1.25	≤11.00	PASS
		5690_UNII-2C	-0.94	≤11.00	PASS
		5690_UNII-3	-5.18	≤30.00	PASS
		5775	-3.74	≤30.00	PASS


Note: 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.  
2.The Duty Cycle Factor and is compensated in the graph.





### Test Graphs

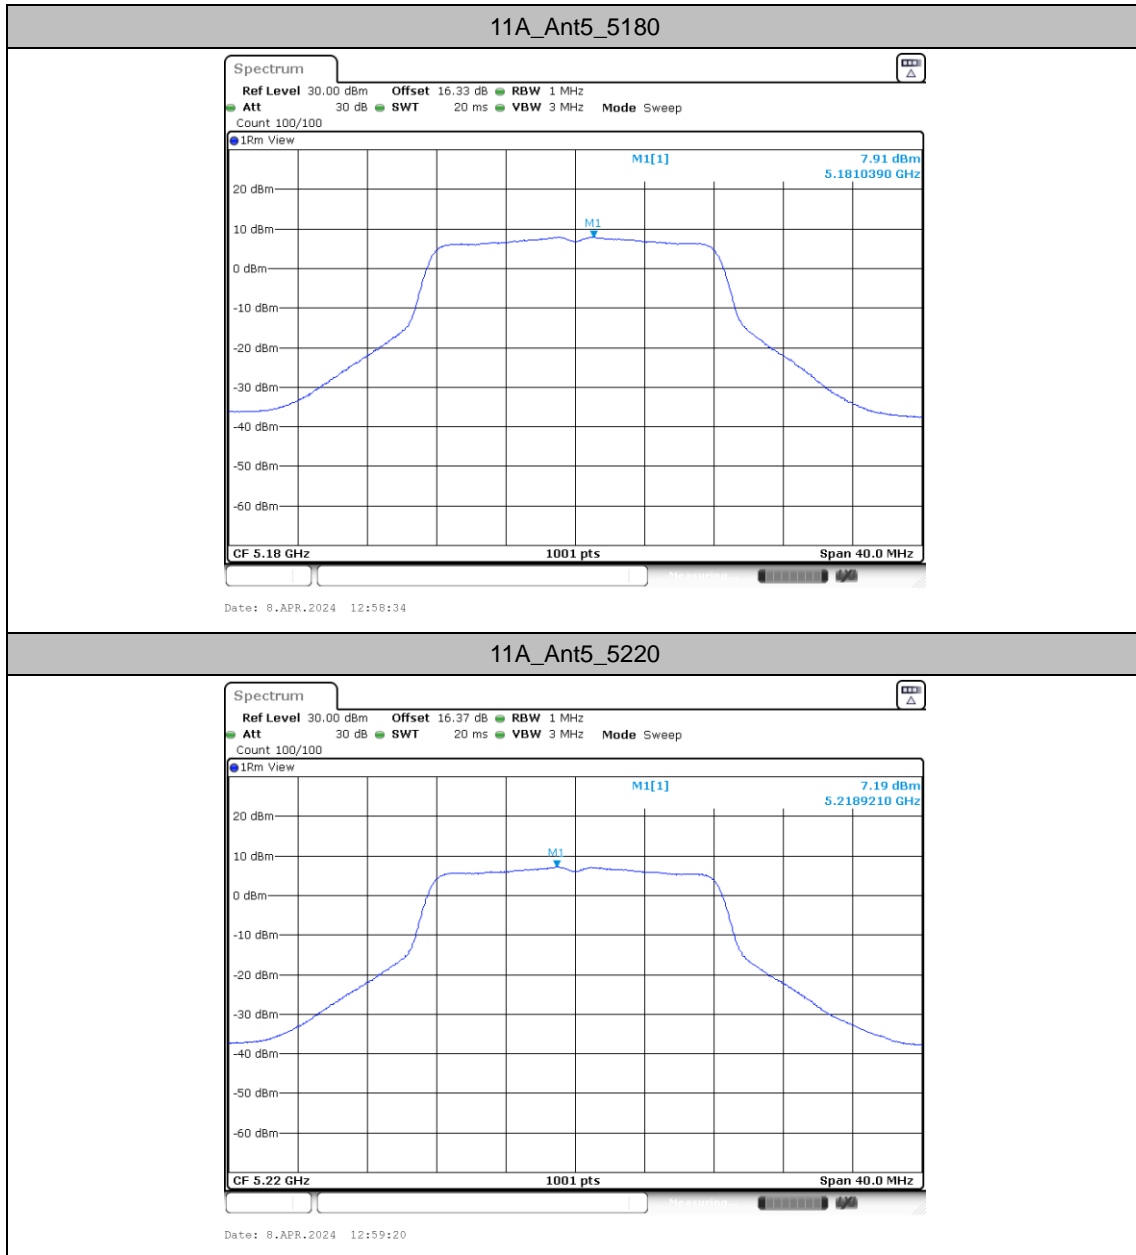


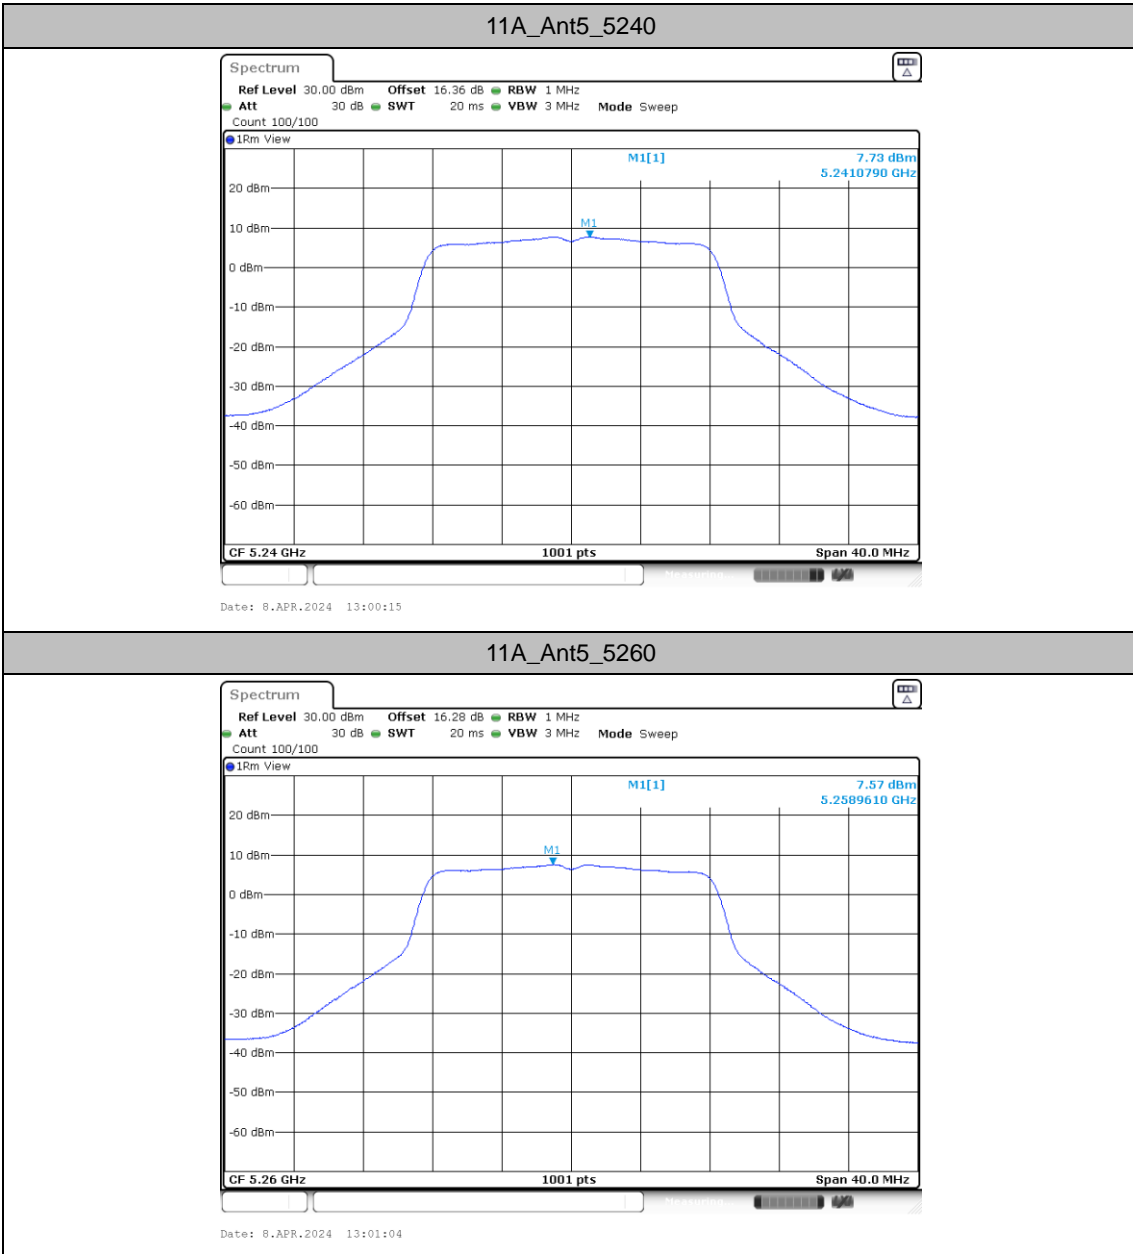

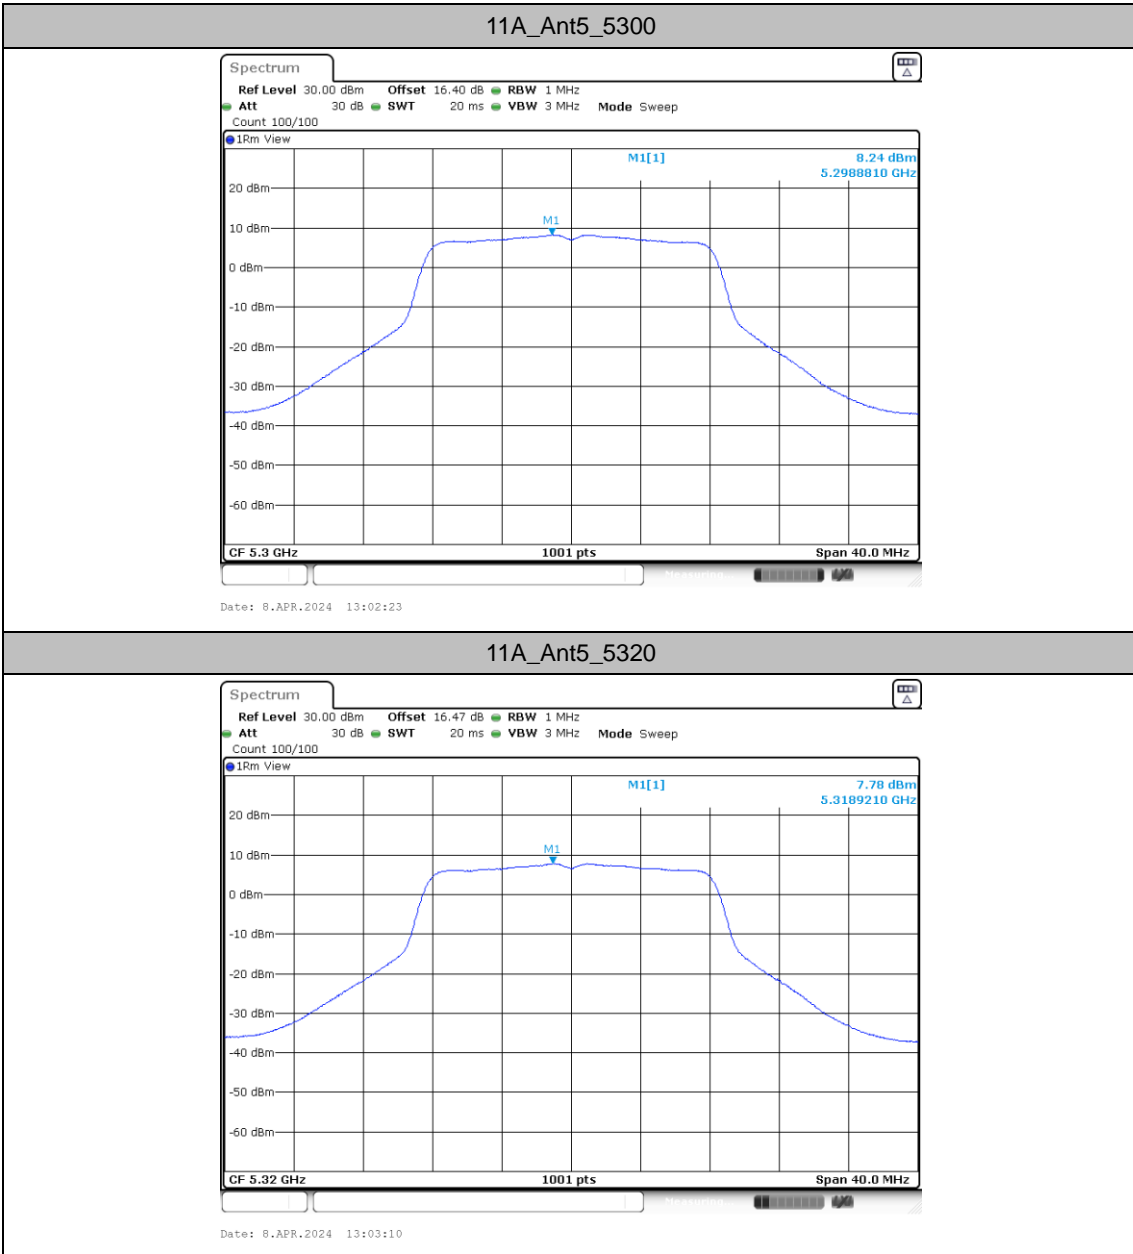


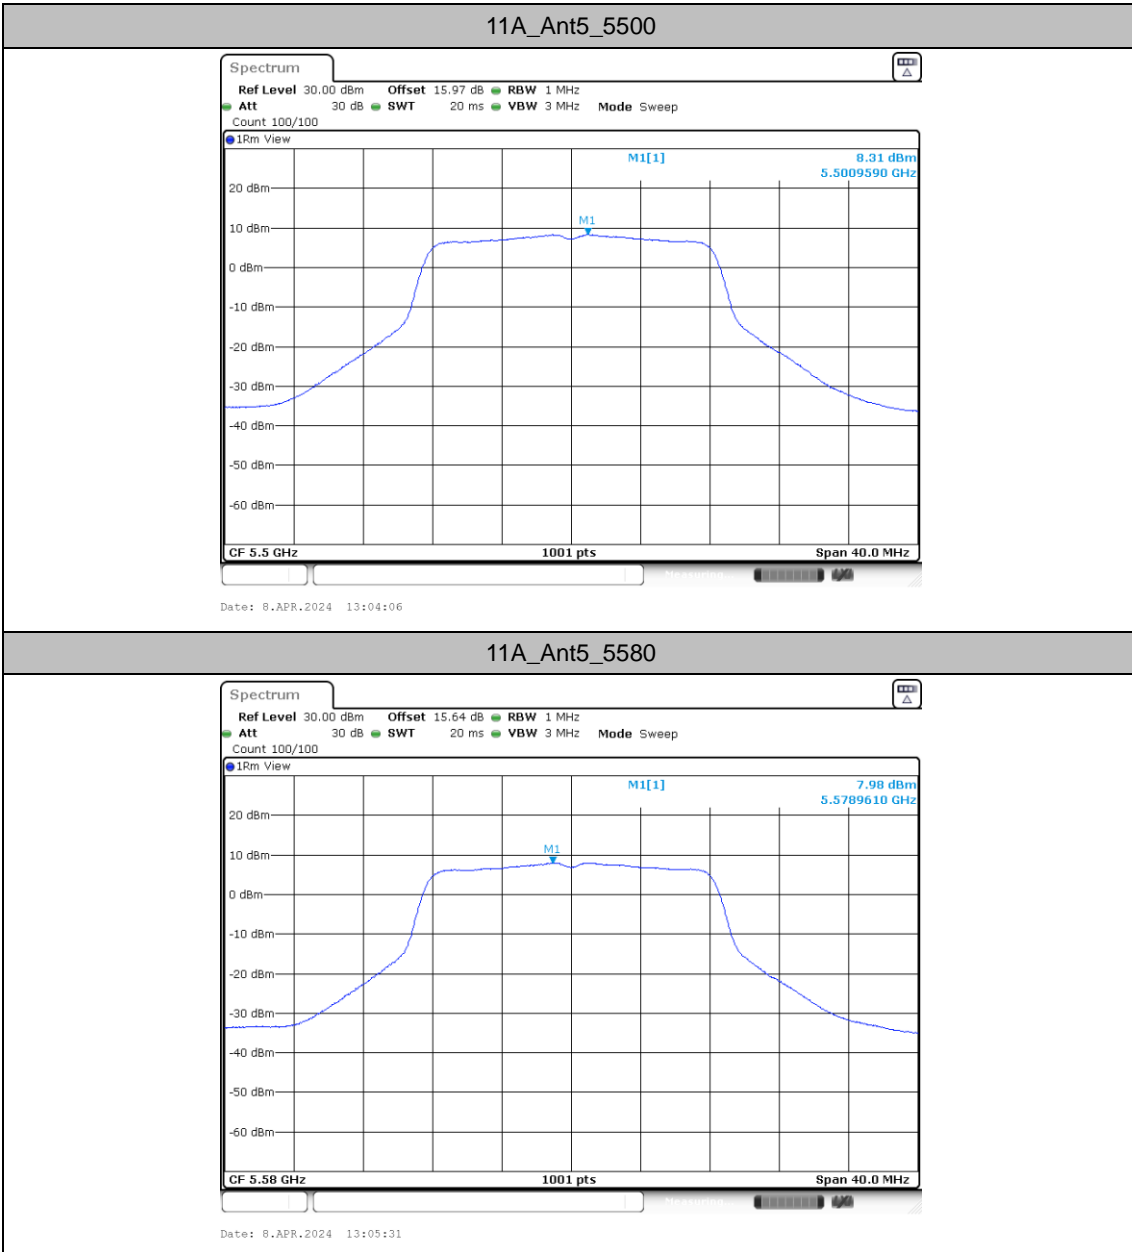


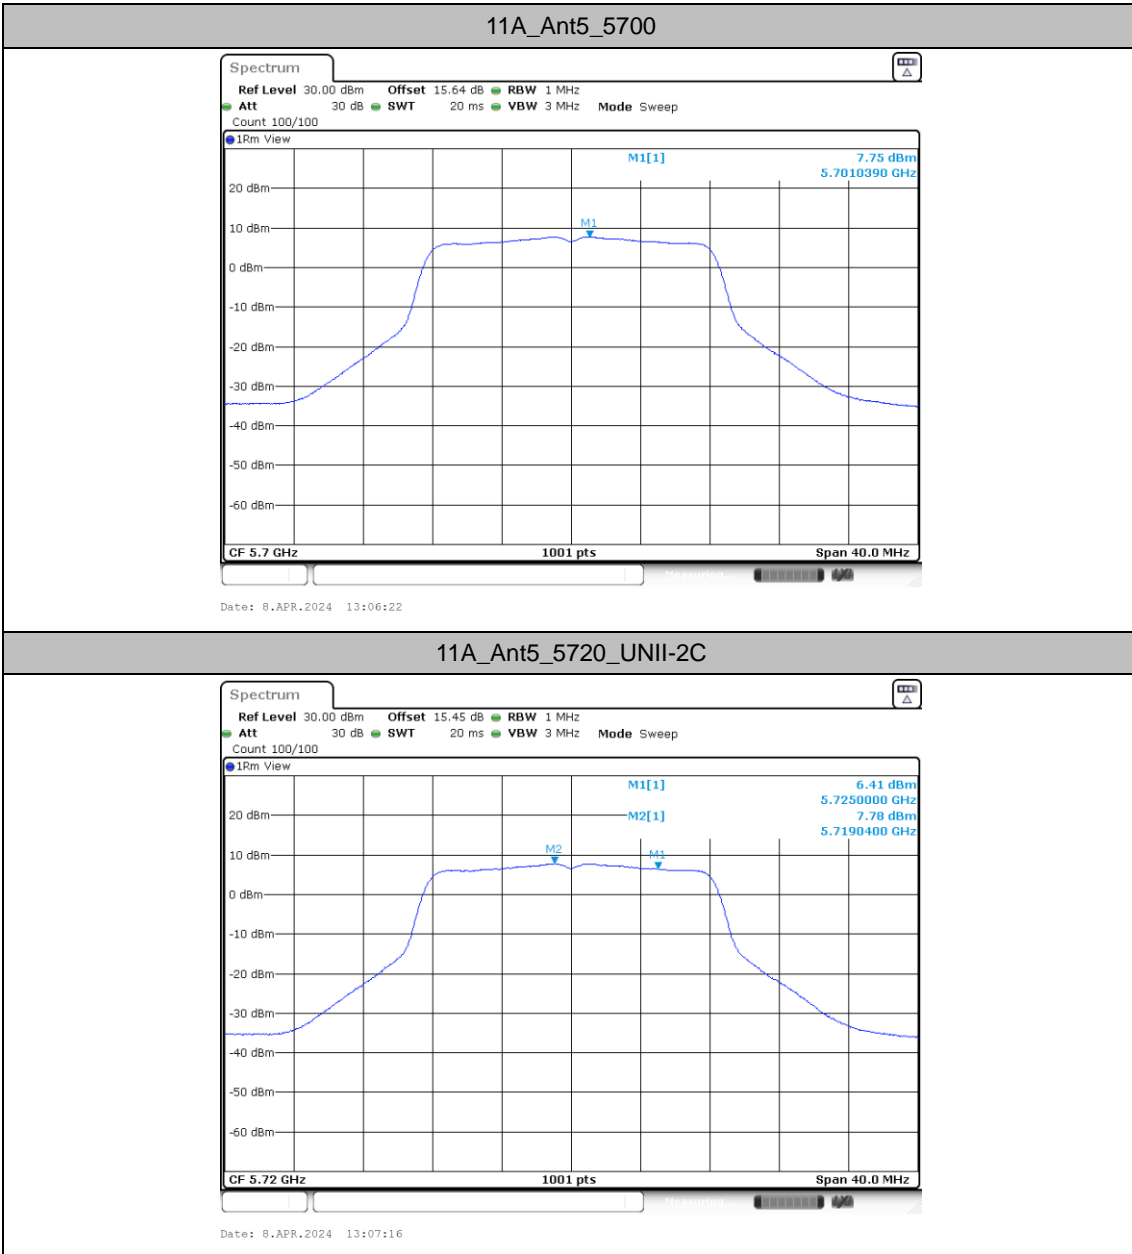


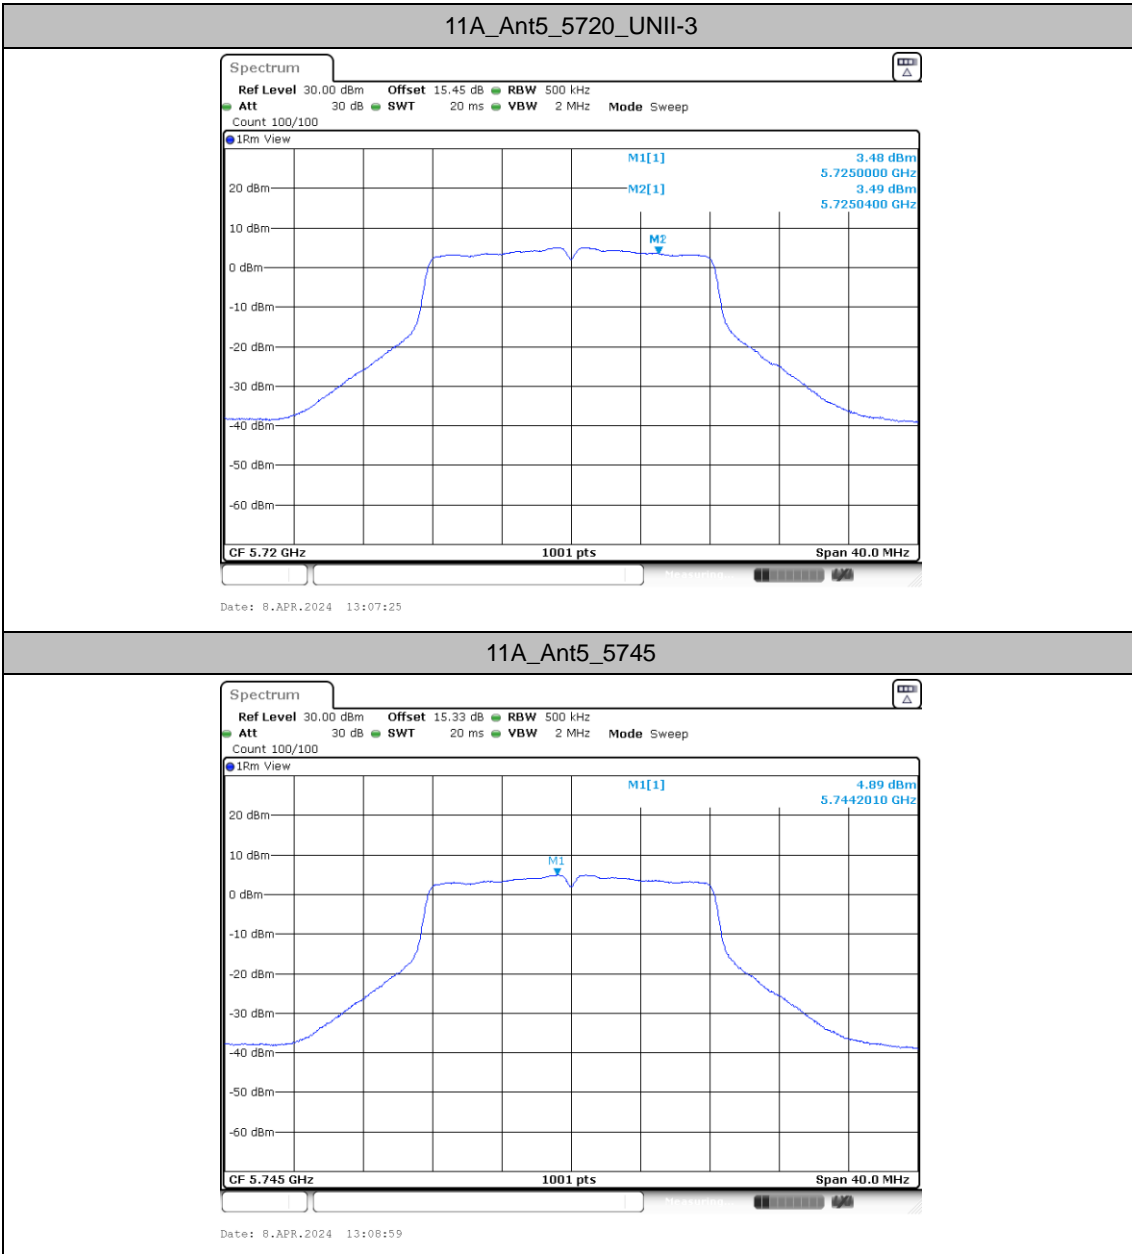





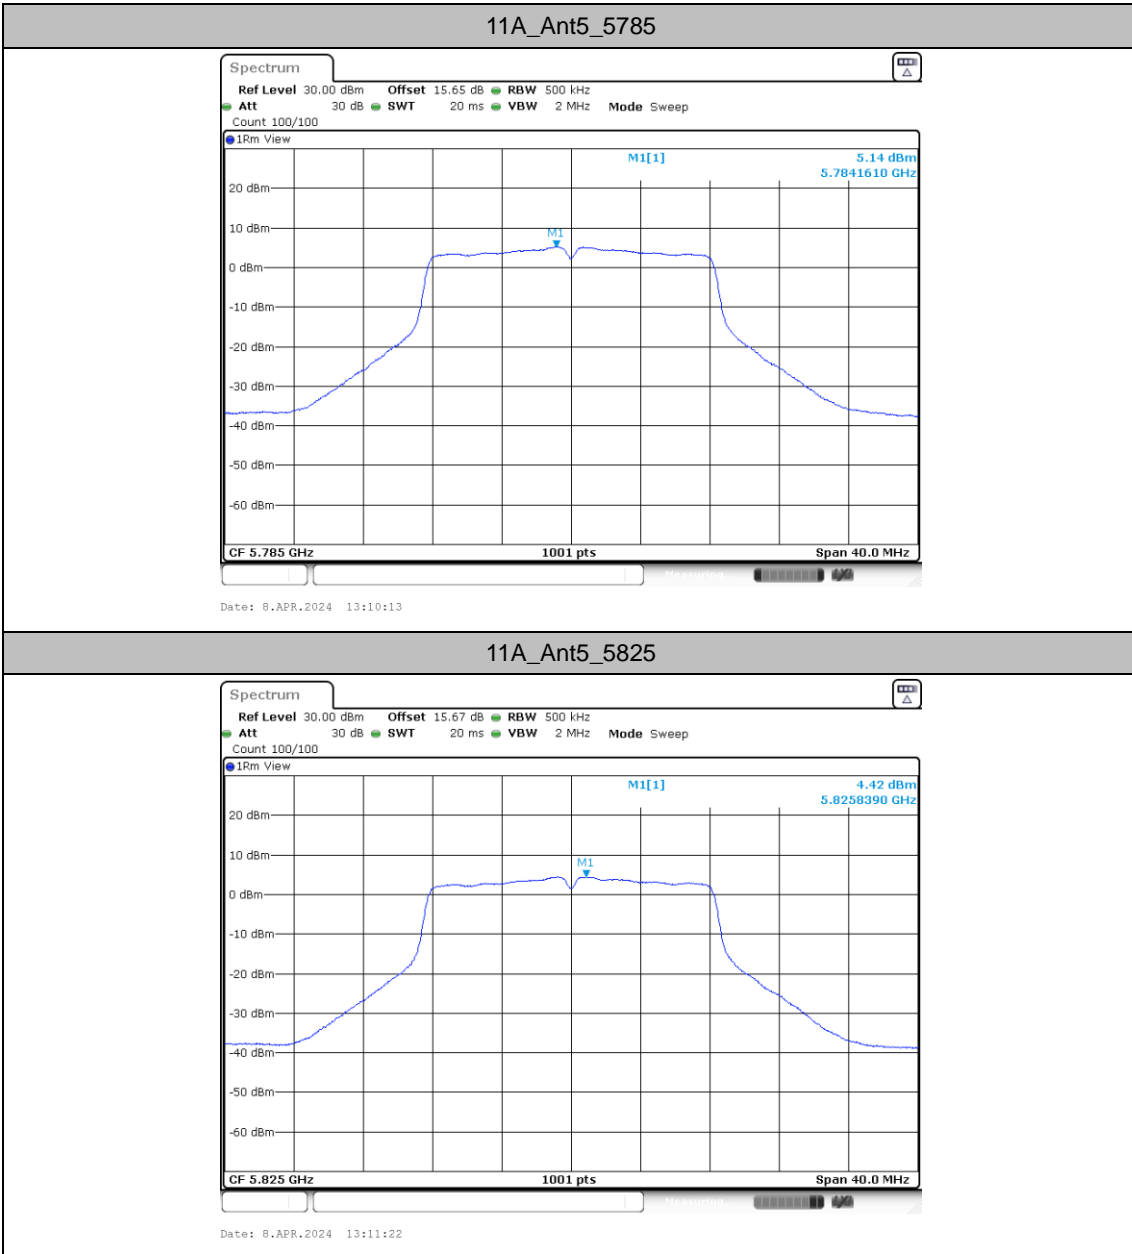


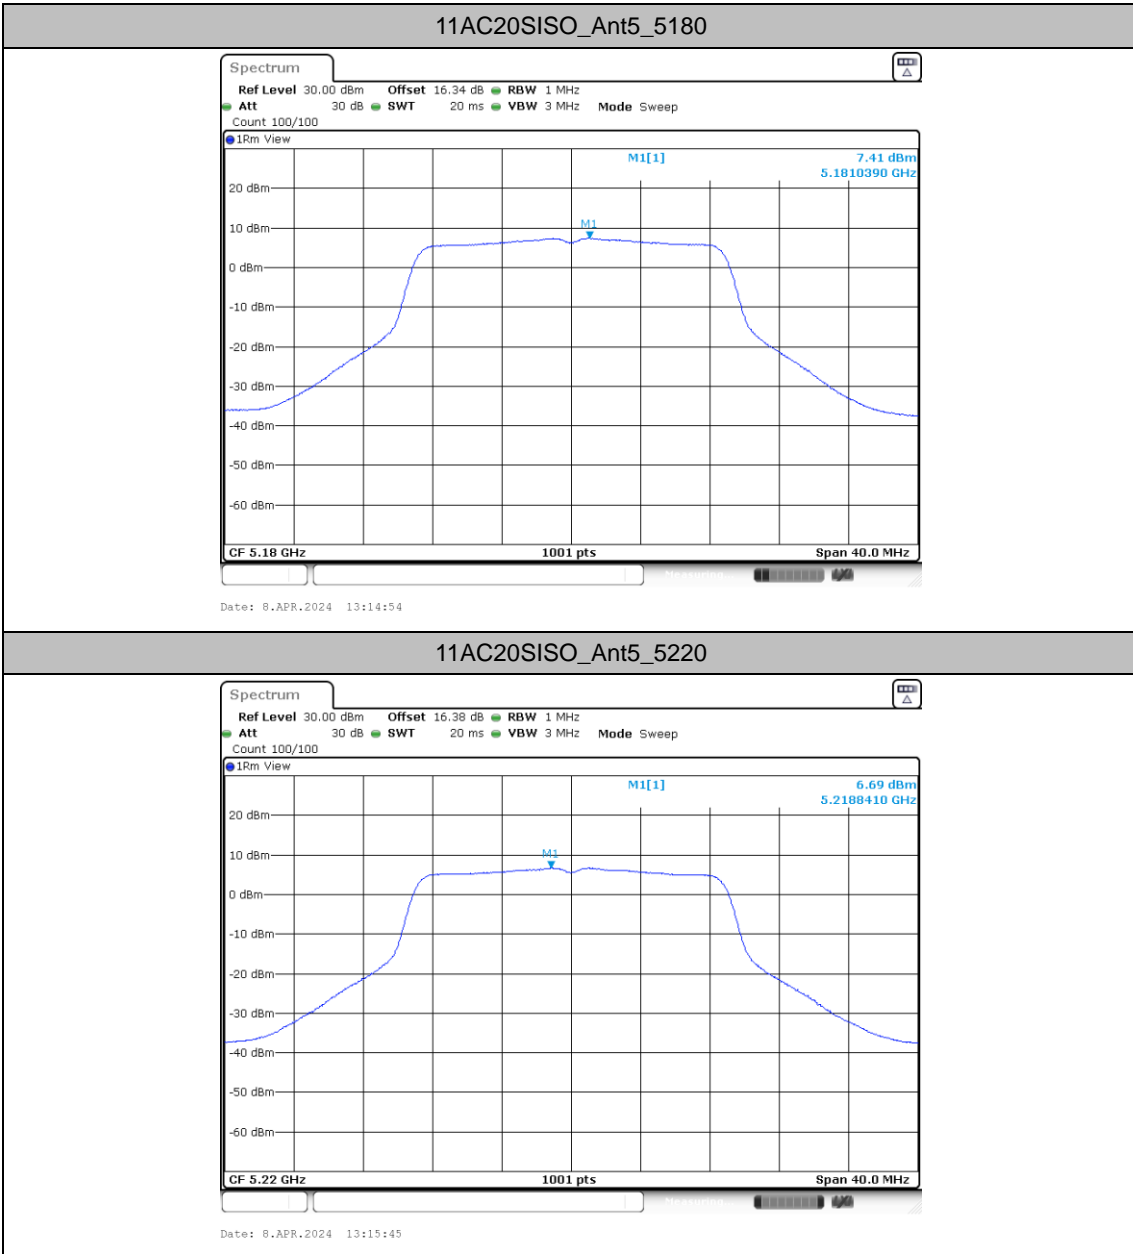


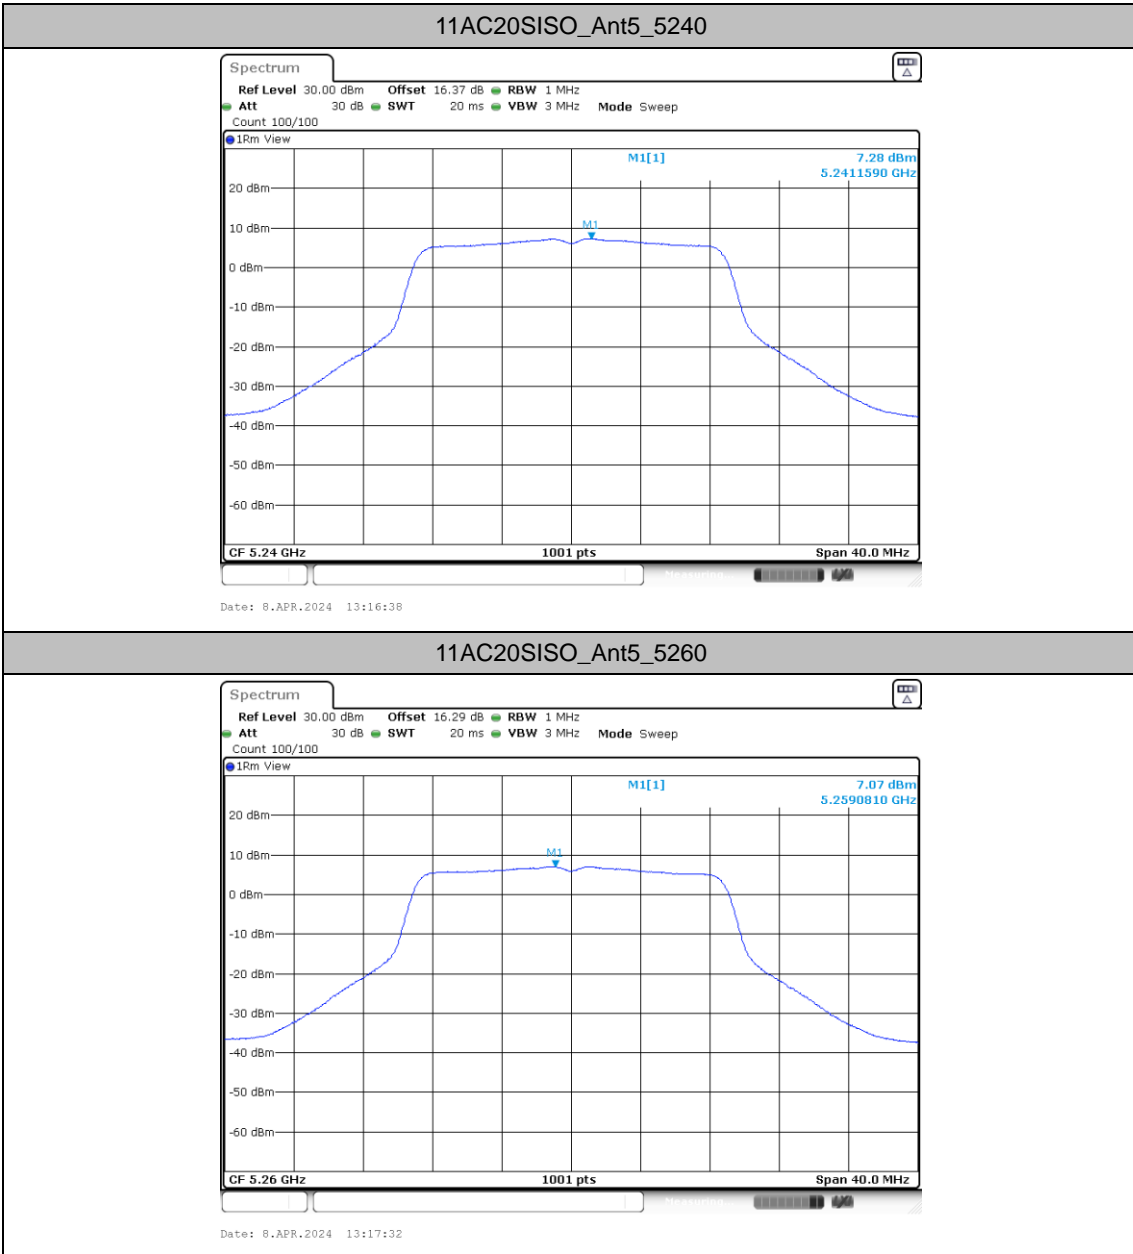


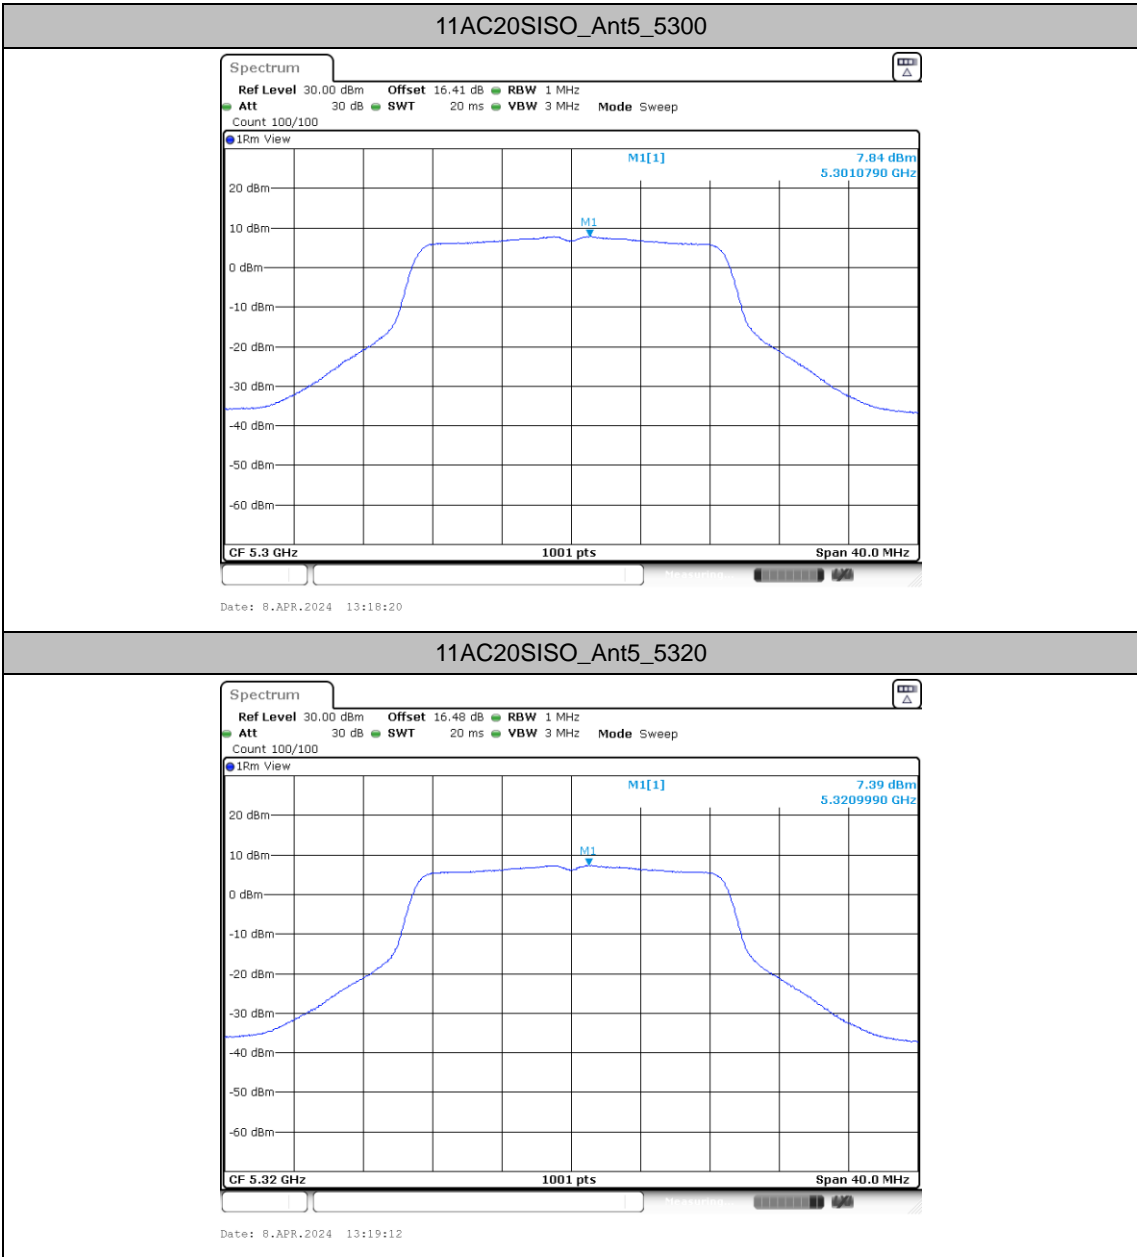

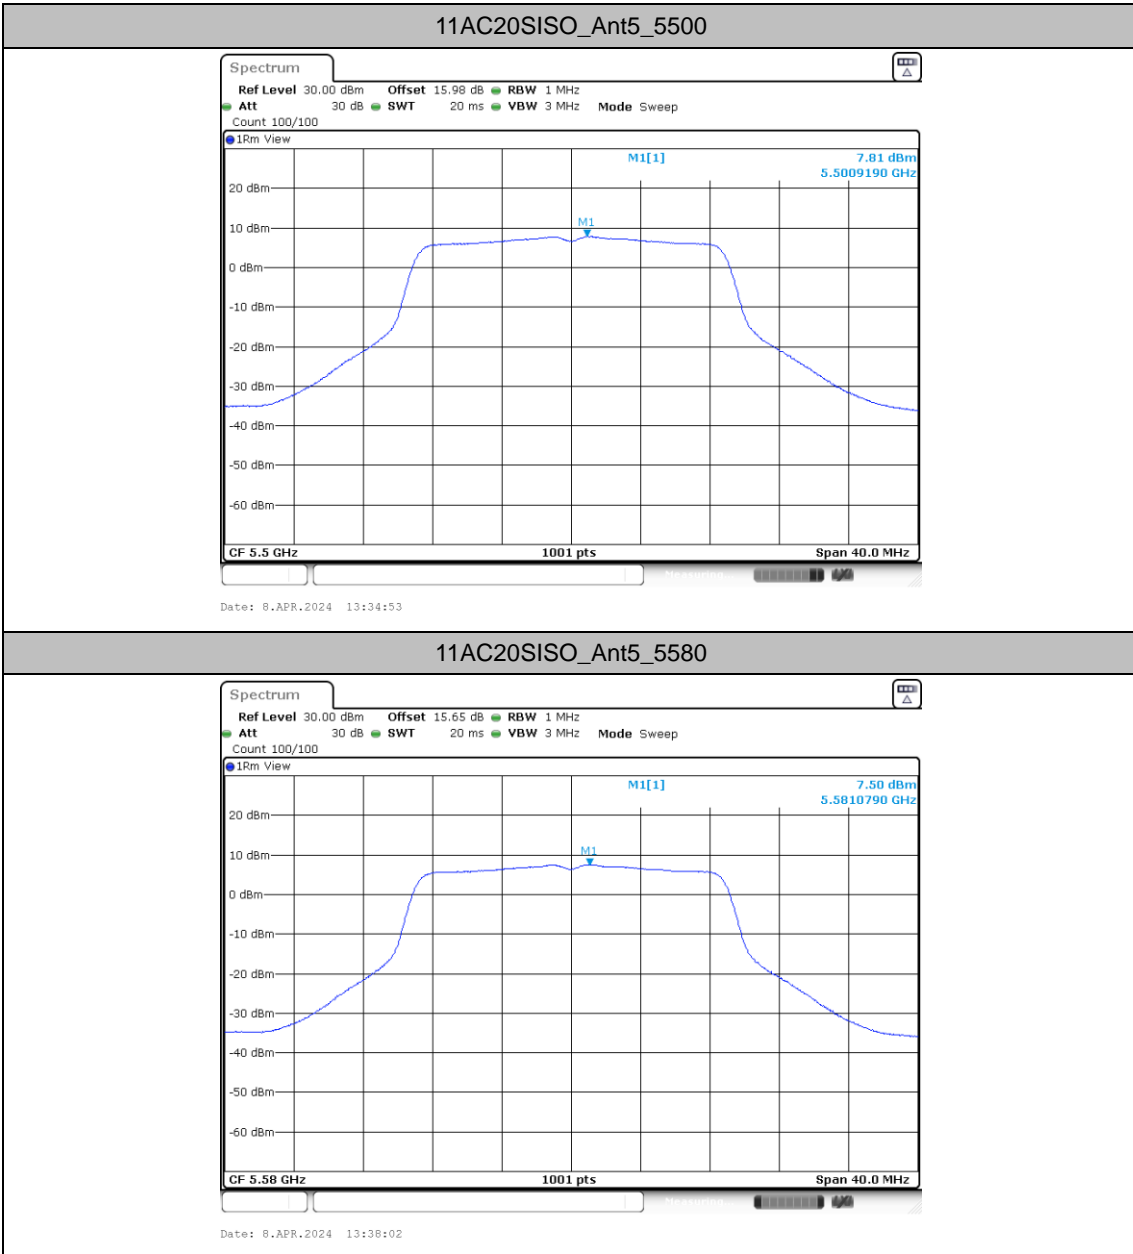


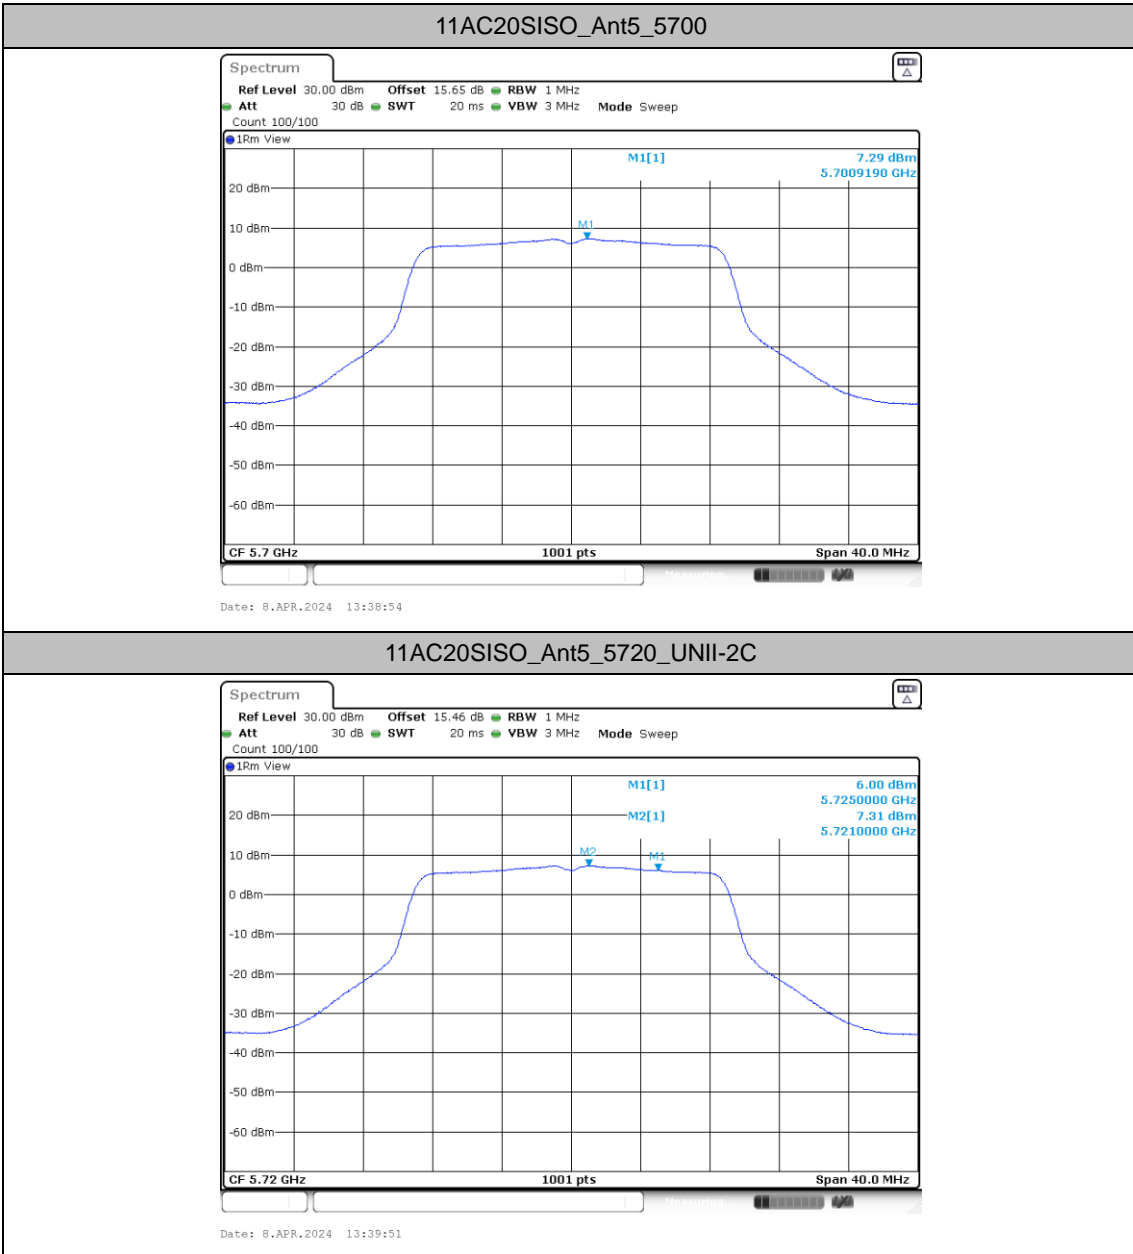


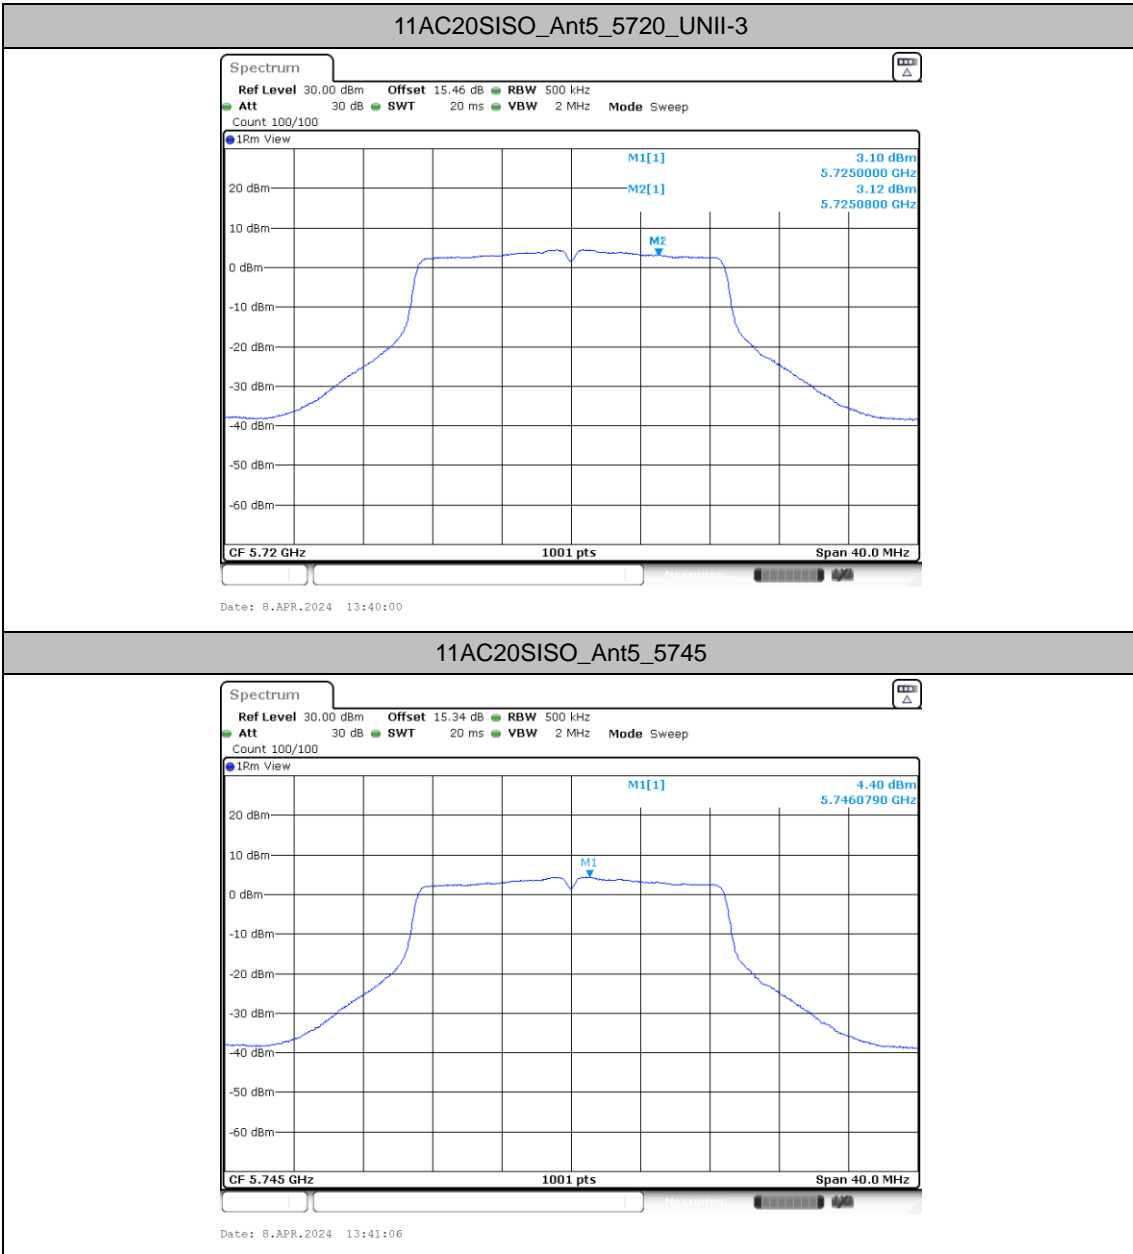


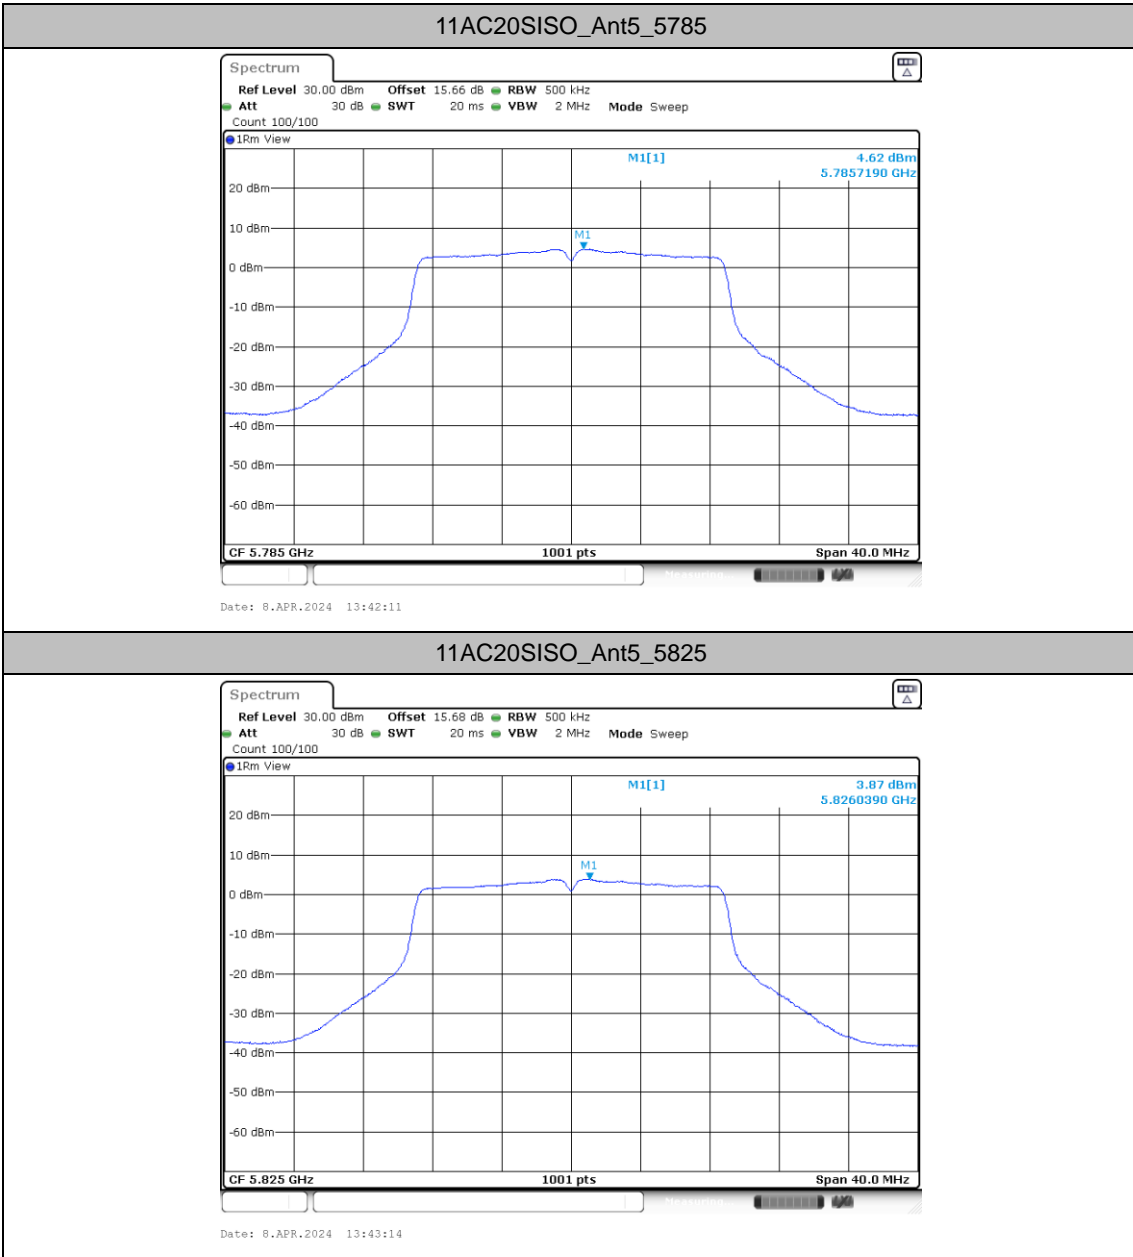



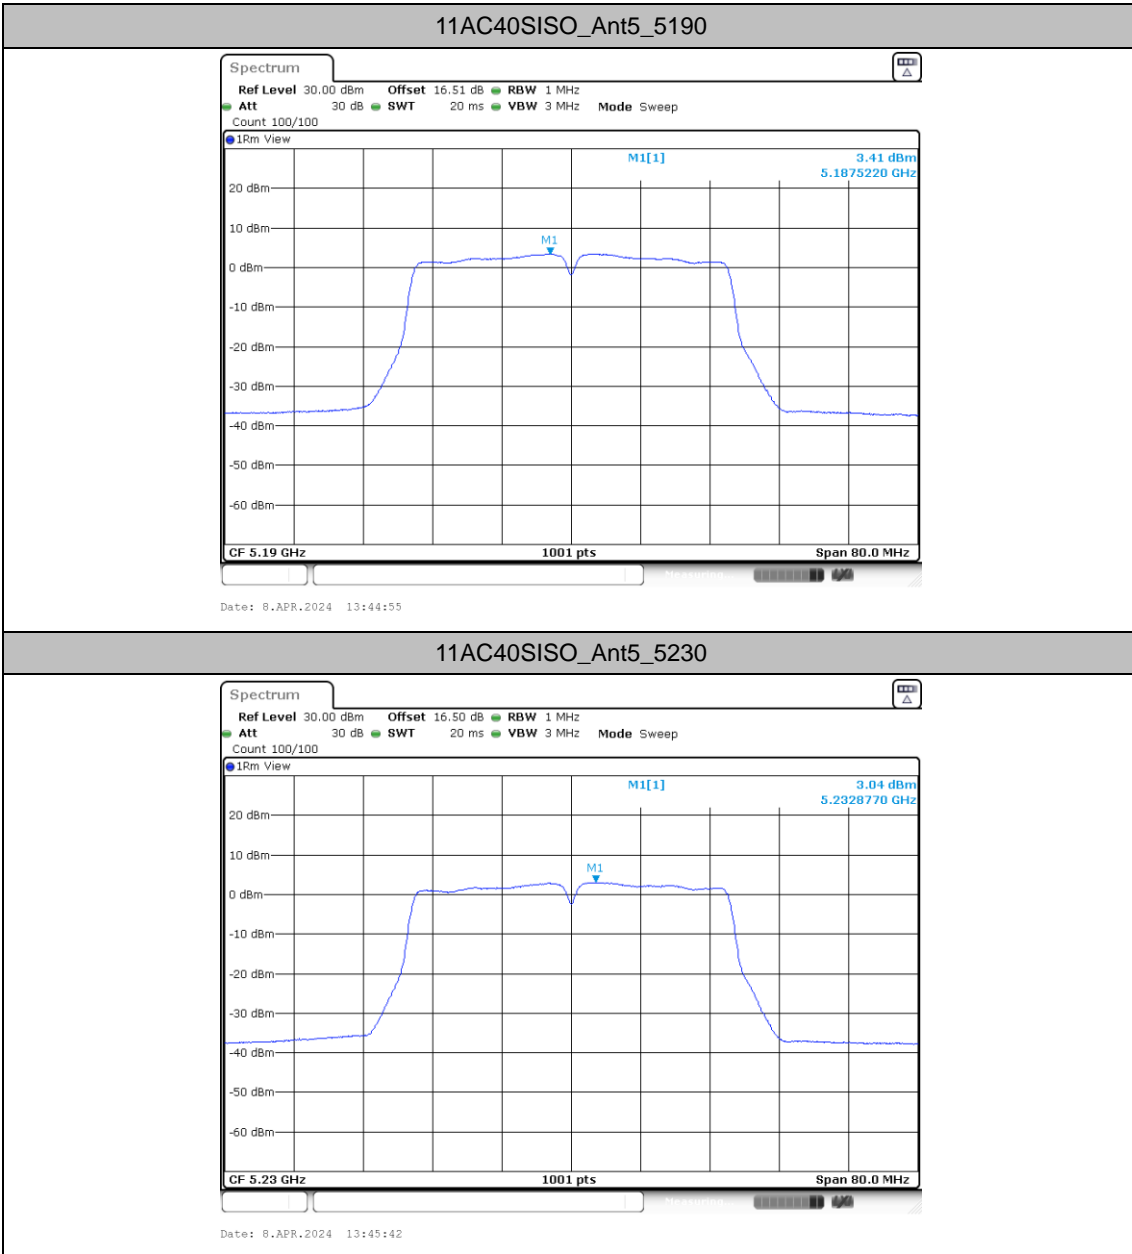


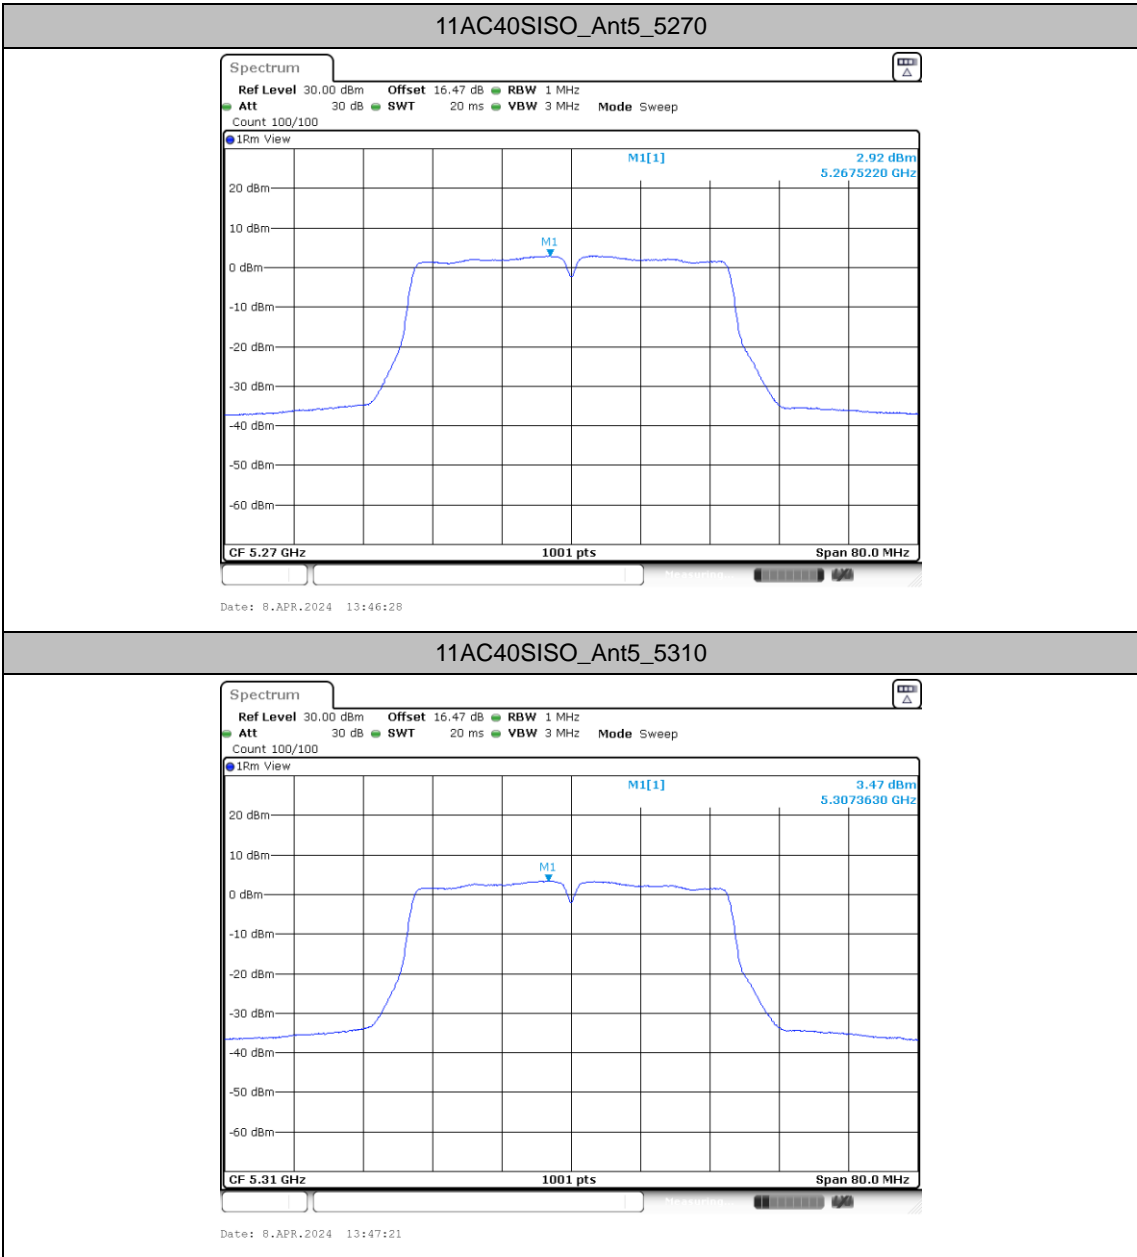

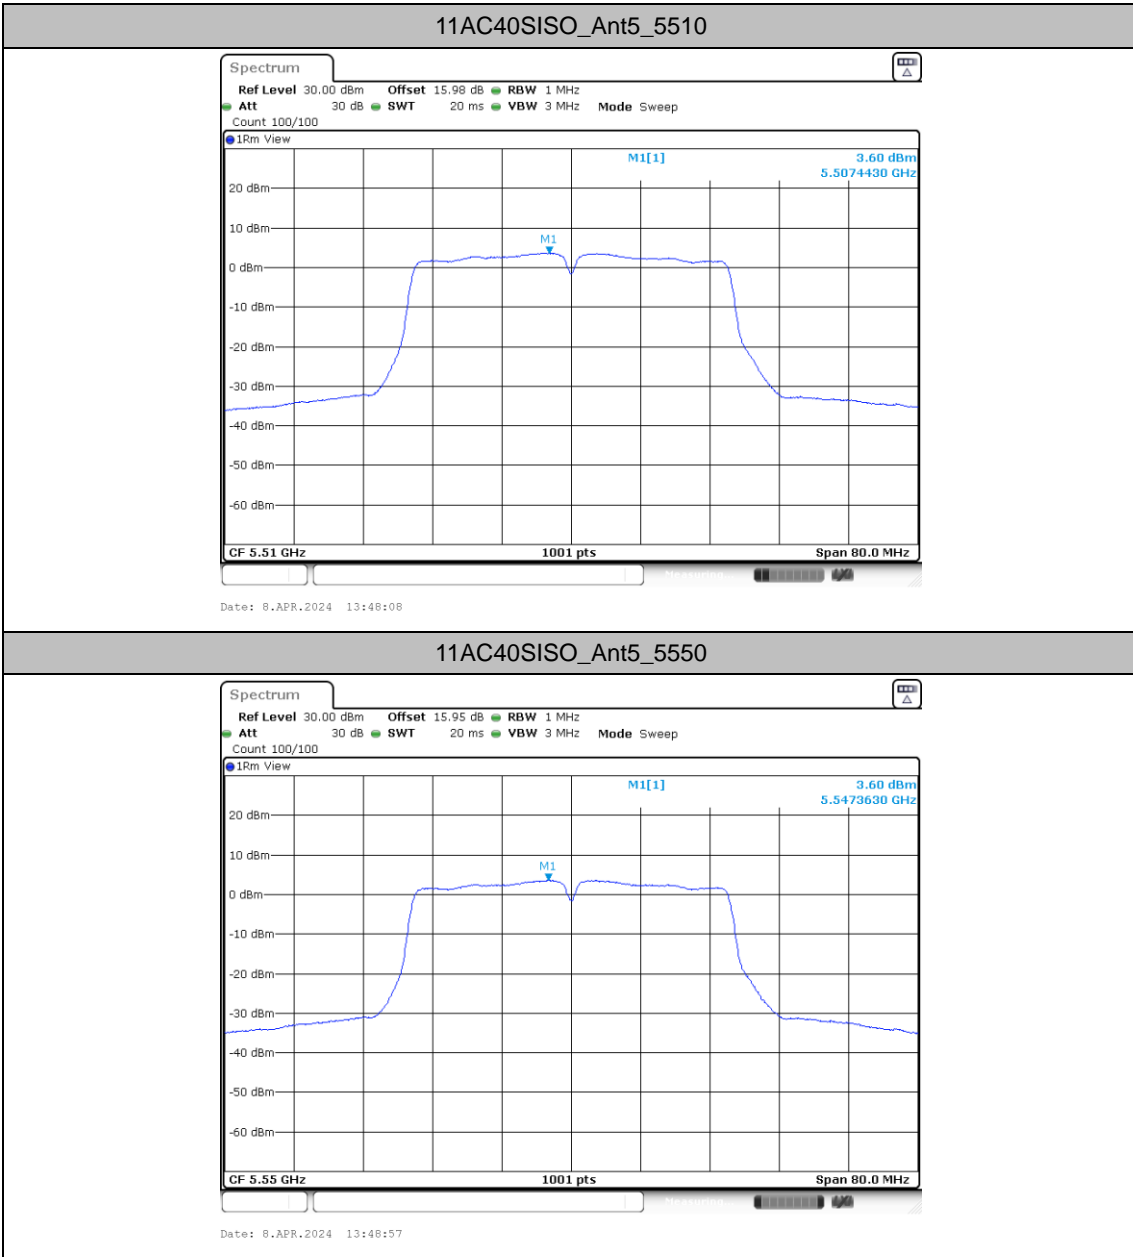




11AC40SISO\_Ant5\_5670

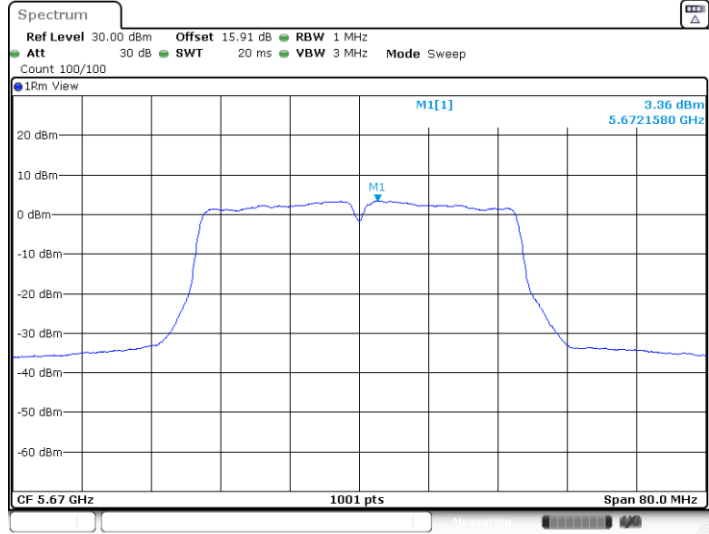



Date: 8.APR.2024 13:49:50


11AC40SISO\_Ant5\_5710\_UNII-2C

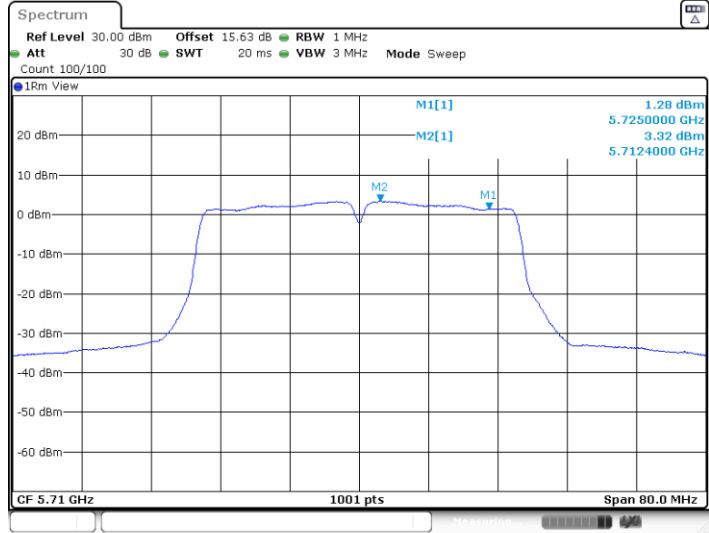


Date: 8.APR.2024 13:50:38

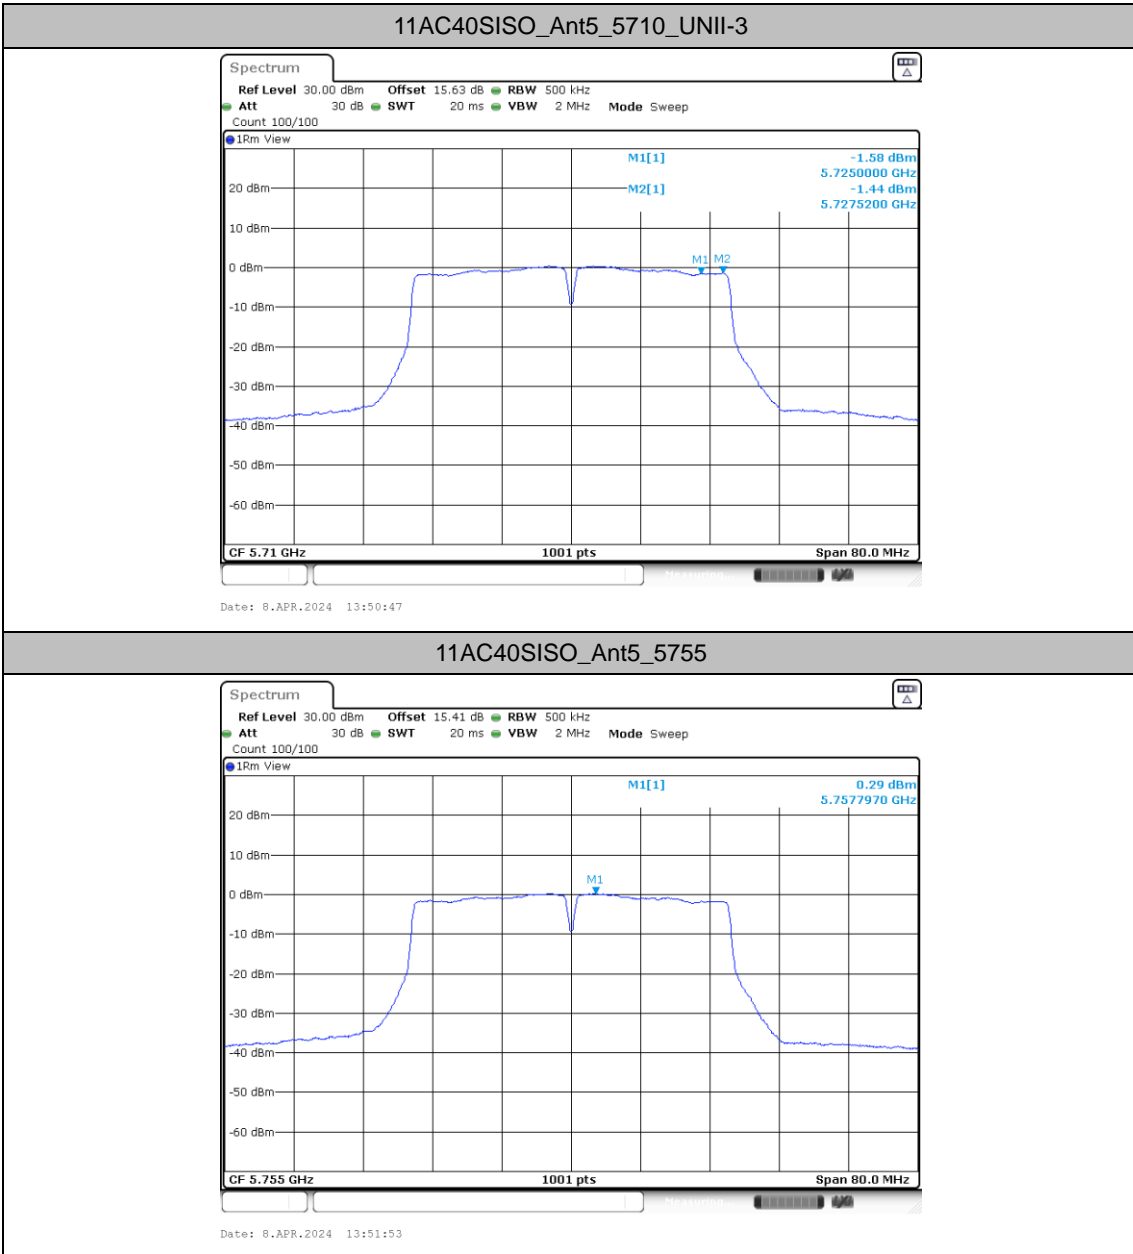


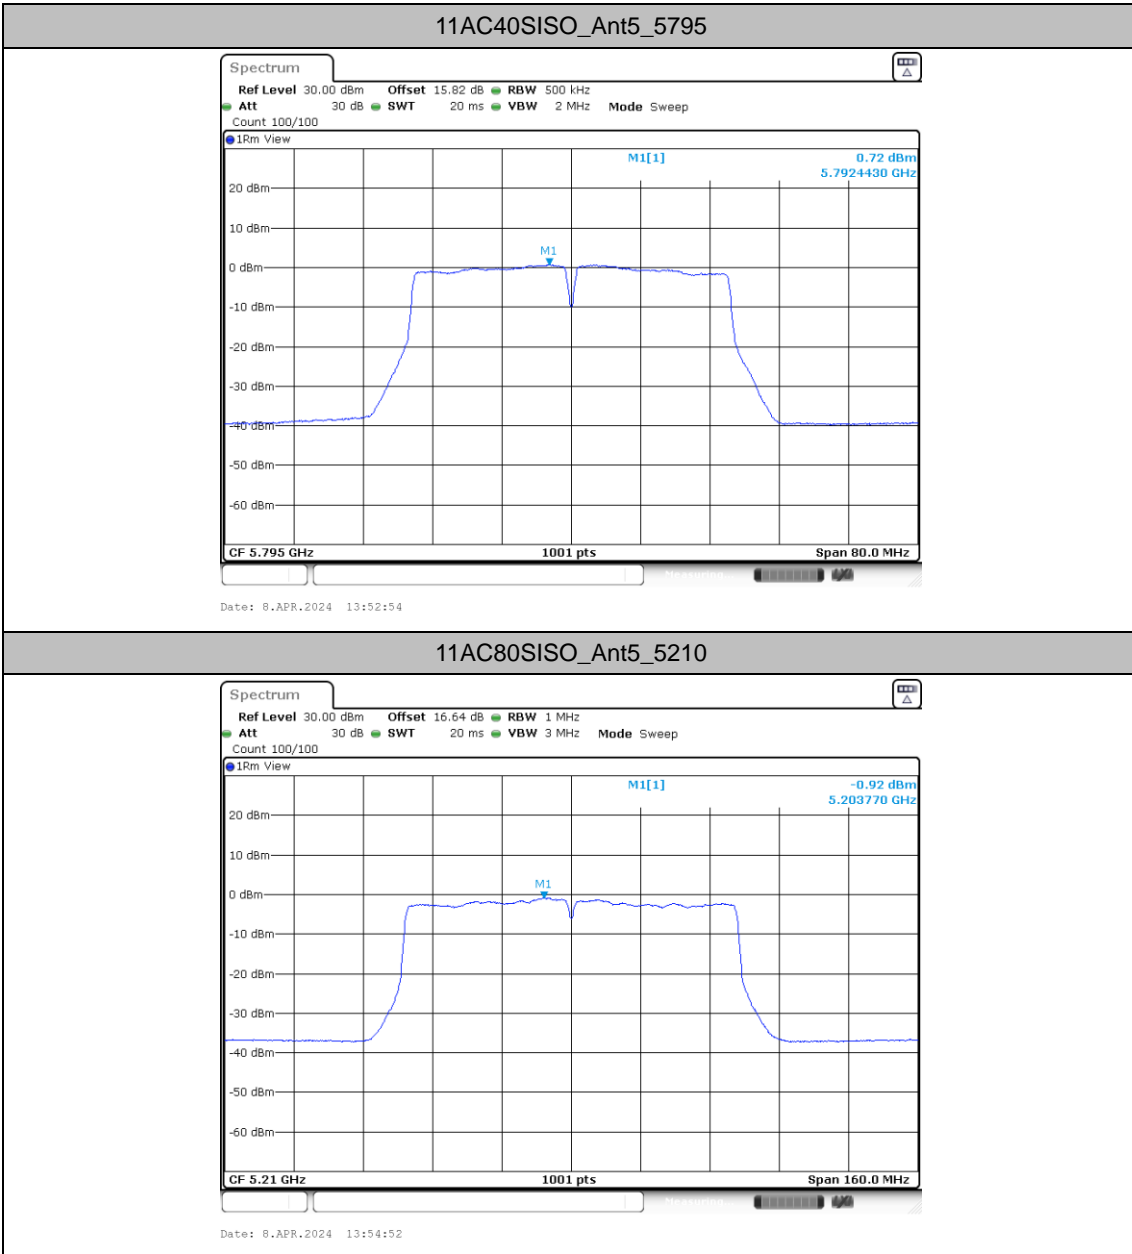

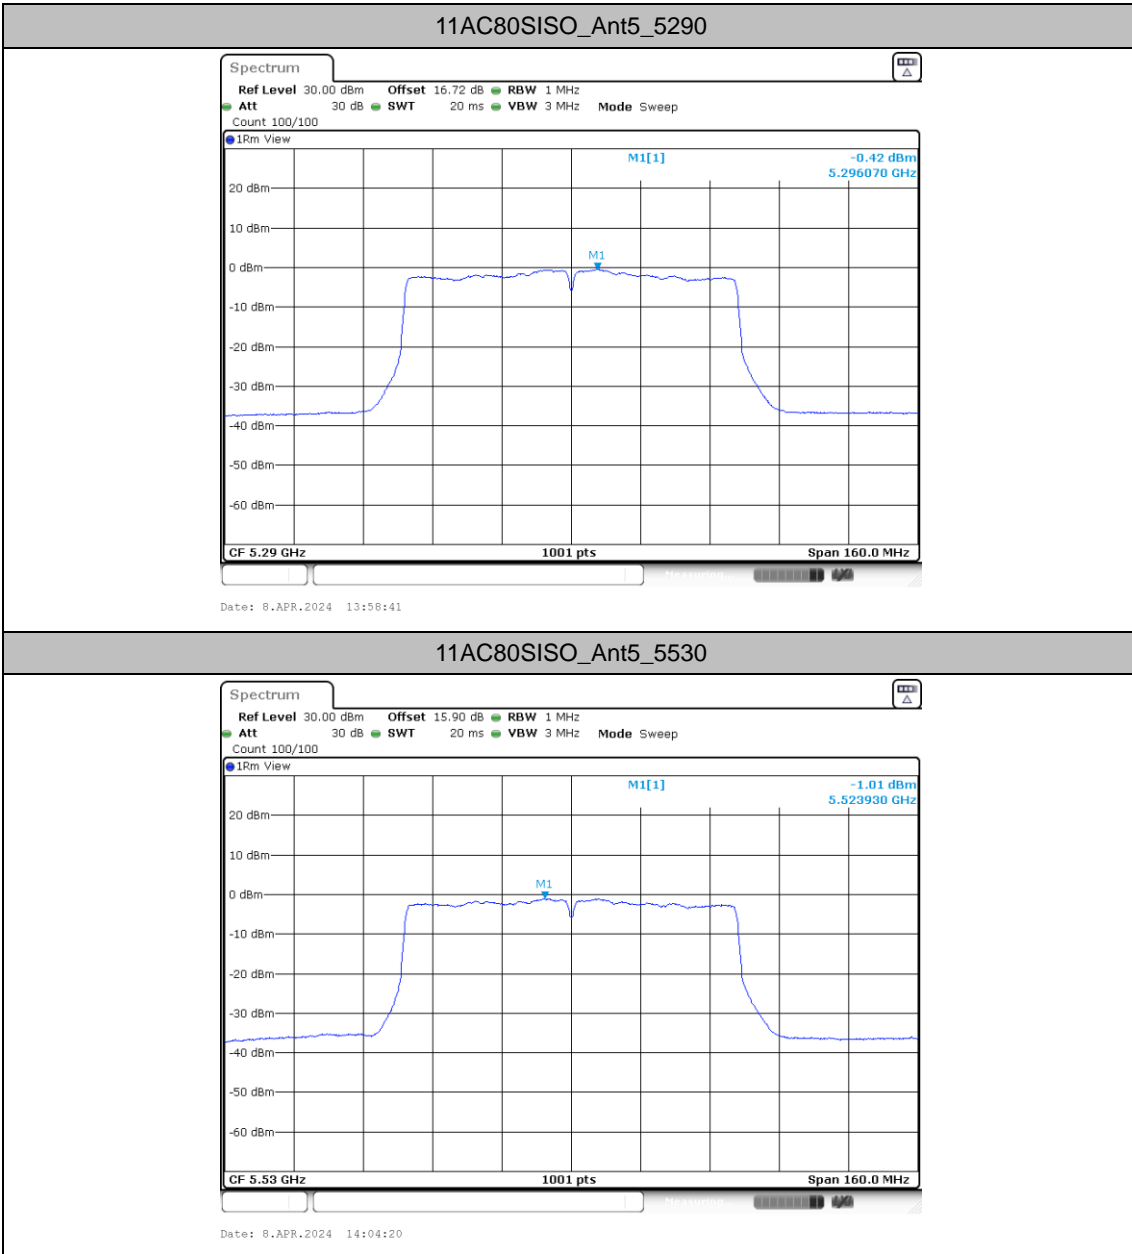

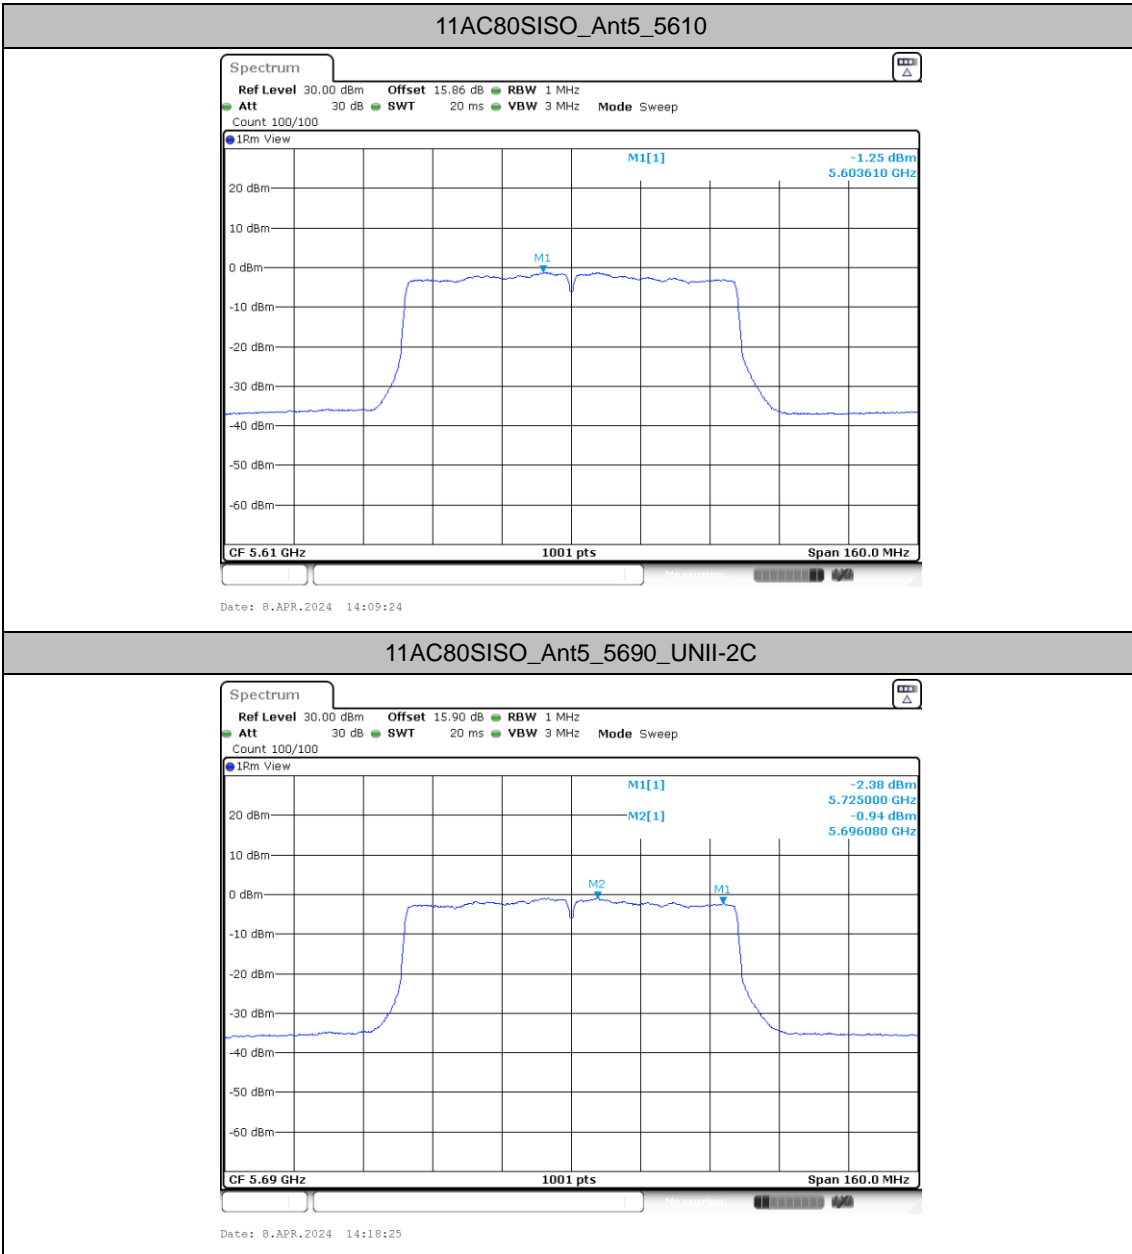




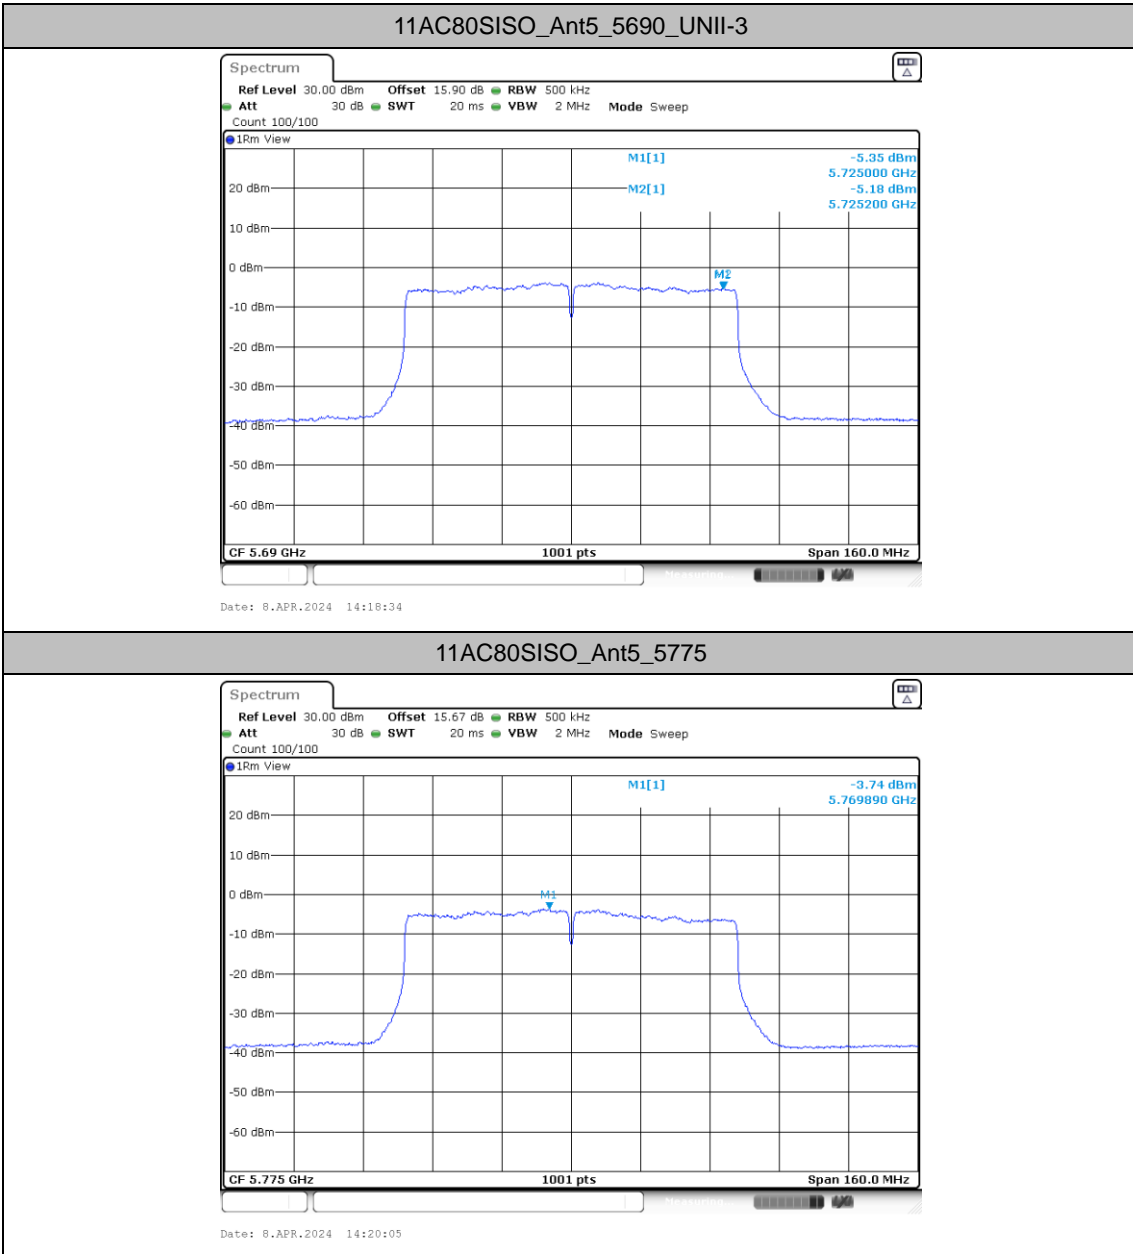



## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

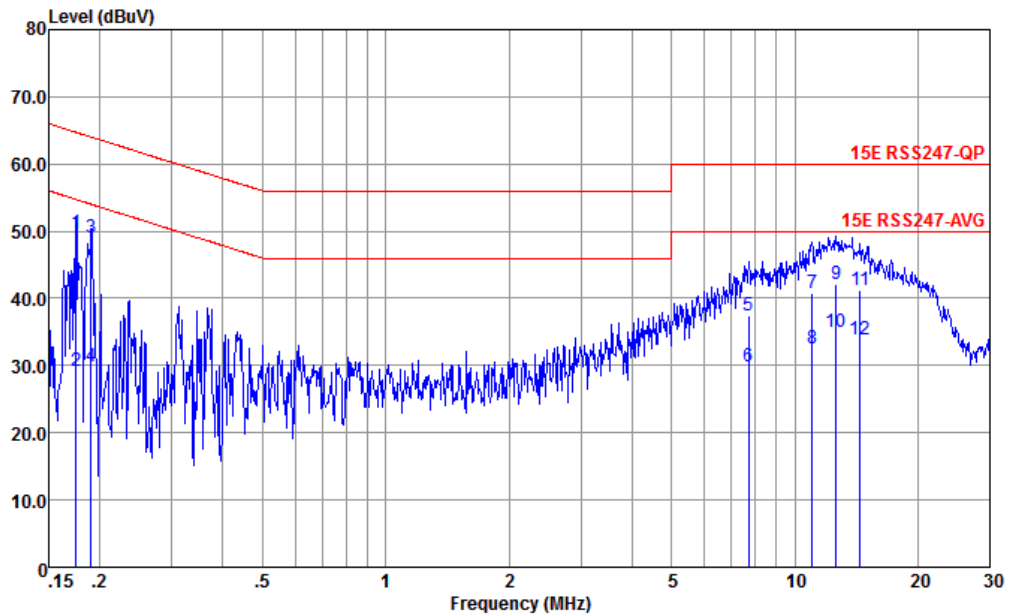


Site : CO01-KS  
 Condition : 15E RSS247-QP LISN-060105-L 2023 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.175	49.65	-15.07	64.72	39.20	0.04	10.41	QP
2	0.175	29.25	-25.47	54.72	18.80	0.04	10.41	Average
3	0.190	48.95	-15.07	64.02	38.51	0.03	10.41	QP
4	0.190	29.95	-24.07	54.02	19.51	0.03	10.41	Average
5	7.728	37.42	-22.58	60.00	27.20	-0.15	10.37	QP
6	7.728	29.82	-20.18	50.00	19.60	-0.15	10.37	Average
7	11.021	40.88	-19.12	60.00	30.20	-0.15	10.83	QP
8	11.021	32.48	-17.52	50.00	21.80	-0.15	10.83	Average
9	12.649	42.11	-17.89	60.00	31.21	-0.14	11.04	QP
10 *	12.649	35.01	-14.99	50.00	24.11	-0.14	11.04	Average
11	14.440	41.25	-18.75	60.00	30.20	-0.12	11.17	QP
12	14.440	33.95	-16.05	50.00	22.90	-0.12	11.17	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

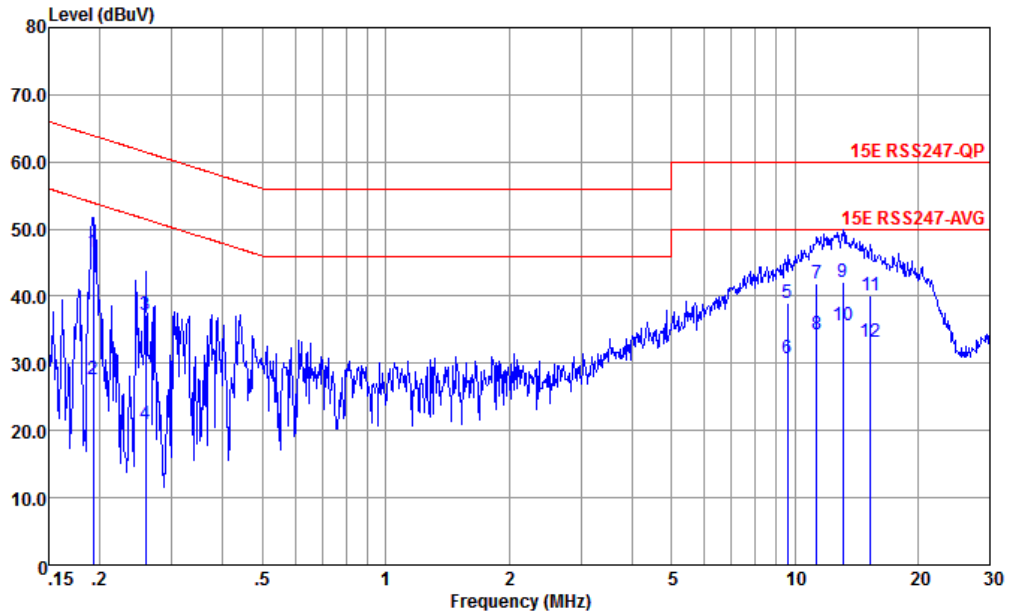

Site : CO01-KS  
 Condition : 15E RSS247-QP LISN-060105-N 2023 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.192	46.66	-17.27	63.93	36.20	0.05	10.41	QP
2	0.192	27.66	-26.27	53.93	17.20	0.05	10.41	Average
3	0.259	37.15	-24.32	61.47	26.80	-0.01	10.36	QP
4	0.259	20.85	-30.62	51.47	10.50	-0.01	10.36	Average
5	9.603	38.92	-21.08	60.00	28.51	-0.19	10.60	QP
6	9.603	30.72	-19.28	50.00	20.31	-0.19	10.60	Average
7	11.317	41.91	-18.09	60.00	31.20	-0.17	10.88	QP
8	11.317	34.31	-15.69	50.00	23.60	-0.17	10.88	Average
9	13.127	42.15	-17.85	60.00	31.20	-0.13	11.08	QP
10 *	13.127	35.75	-14.25	50.00	24.80	-0.13	11.08	Average
11	15.307	40.01	-19.99	60.00	28.90	-0.11	11.22	QP
12	15.307	33.21	-16.79	50.00	22.10	-0.11	11.22	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



## Appendix C Radiated Spurious Emission Test Data

Test Engineer :	Kuang Jia	Relative Humidity :	48~49%
		Temperature :	24~25°C

### Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-1	5.15-5.25	5	802.11a	36	5180	6Mbps	-	-
Mode 2	U-NII-1	5.15-5.25	5	802.11a	44	5220	6Mbps	-	-
Mode 3	U-NII-1	5.15-5.25	5	802.11a	48	5240	6Mbps	-	-
Mode 4	U-NII-1	5.15-5.25	5	802.11ac VHT20	36	5180	MCS0	-	-
Mode 5	U-NII-1	5.15-5.25	5	802.11ac VHT20	44	5220	MCS0	-	-
Mode 6	U-NII-1	5.15-5.25	5	802.11ac VHT20	48	5240	MCS0	-	-
Mode 7	U-NII-1	5.15-5.25	5	802.11ac VHT40	38	5190	MCS0	-	-
Mode 8	U-NII-1	5.15-5.25	5	802.11ac VHT40	46	5230	MCS0	-	-
Mode 9	U-NII-1	5.15-5.25	5	802.11ac VHT80	42	5210	MCS0	-	-
Mode 10	U-NII-2A	5.25-5.35	5	802.11a	52	5260	6Mbps	-	-
Mode 11	U-NII-2A	5.25-5.35	5	802.11a	60	5300	6Mbps	-	-
Mode 12	U-NII-2A	5.25-5.35	5	802.11a	64	5320	6Mbps	-	-
Mode 13	U-NII-2A	5.25-5.35	5	802.11ac VHT20	52	5260	MCS0	-	-
Mode 14	U-NII-2A	5.25-5.35	5	802.11ac VHT20	60	5300	MCS0	-	-
Mode 15	U-NII-2A	5.25-5.35	5	802.11ac VHT20	64	5320	MCS0	-	-
Mode 16	U-NII-2A	5.25-5.35	5	802.11ac VHT40	54	5270	MCS0	-	-
Mode 17	U-NII-2A	5.25-5.35	5	802.11ac VHT40	62	5310	MCS0	-	-
Mode 18	U-NII-2A	5.25-5.35	5	802.11ac VHT80	58	5290	MCS0	-	-
Mode 20	U-NII-2C	5.47-5.725	5	802.11a	100	5500	6Mbps	-	-
Mode 21	U-NII-2C	5.47-5.725	5	802.11a	116	5580	6Mbps	-	-
Mode 22	U-NII-2C	5.47-5.725	5	802.11a	140	5700	6Mbps	-	-
Mode 23	U-NII-2C	5.47-5.725	5	802.11ac VHT20	100	5500	MCS0	-	-
Mode 24	U-NII-2C	5.47-5.725	5	802.11ac VHT20	116	5580	MCS0	-	-
Mode 25	U-NII-2C	5.47-5.725	5	802.11ac VHT20	140	5700	MCS0	-	-
Mode 26	U-NII-2C	5.47-5.725	5	802.11ac VHT40	102	5510	MCS0	-	-
Mode 27	U-NII-2C	5.47-5.725	5	802.11ac VHT40	110	5550	MCS0	-	-
Mode 28	U-NII-2C	5.47-5.725	5	802.11ac VHT40	134	5670	MCS0	-	-
Mode 29	U-NII-2C	5.47-5.725	5	802.11ac VHT80	106	5530	MCS0	-	-
Mode 30	U-NII-2C	5.47-5.725	5	802.11ac VHT80	122	5610	MCS0	-	-
Mode 31	U-NII-2C	5.47-5.725	5	802.11a	144	5720	6Mbps	-	-
Mode 32	U-NII-2C	5.47-5.725	5	802.11ac VHT20	144	5720	MCS0	-	-
Mode 33	U-NII-2C	5.47-5.725	5	802.11ac VHT40	142	5710	MCS0	-	-
Mode 34	U-NII-2C	5.47-5.725	5	802.11ac VHT80	138	5690	MCS0	-	-
Mode 35	U-NII-2A	5.25-5.35	5	802.11ac VHT40	62	5310	MCS0	-	LF
Mode 36	U-NII-3	5.725-5.85	5	802.11a	149	5745	6Mbps	-	-
Mode 37	U-NII-3	5.725-5.85	5	802.11a	157	5785	6Mbps	-	-
Mode 38	U-NII-3	5.725-5.85	5	802.11a	165	5825	6Mbps	-	-
Mode 39	U-NII-3	5.725-5.85	5	802.11ac VHT20	149	5745	MCS0	-	-
Mode 40	U-NII-3	5.725-5.85	5	802.11ac VHT20	157	5785	MCS0	-	-
Mode 41	U-NII-3	5.725-5.85	5	802.11ac VHT20	165	5825	MCS0	-	-
Mode 42	U-NII-3	5.725-5.85	5	802.11ac VHT40	151	5755	MCS0	-	-
Mode 43	U-NII-3	5.725-5.85	5	802.11ac VHT40	159	5795	MCS0	-	-
Mode 44	U-NII-3	5.725-5.85	5	802.11ac VHT80	155	5775	MCS0	-	-
Mode 45	U-NII-3	5.725-5.85	5	802.11ac VHT80	155	5775	MCS0	-	LF
Mode 46	CO-TX	5.25-5.35	5	802.11ac VHT40	62	5310	MCS0	-	-
		LTE B13	0	-	-	-	-	-	-
		2400-2483.5	6	Bluetooth-LE_GSFK	39	2480	2Mbps	-	-



## Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11a	36	5149.94	50.53	54.00	-3.47	H	AVERAGE	Pass	Band Edge
1	802.11a	36	10360.00	50.41	68.30	-17.89	V	Peak	Pass	Harmonic
2	802.11a	44	-	-	-	-	-	-	-	Band Edge
2	802.11a	44	10440.00	50.95	68.30	-17.35	V	Peak	Pass	Harmonic
3	802.11a	48	5147.36	43.11	54.00	-10.89	H	AVERAGE	Pass	Band Edge
3	802.11a	48	10480.00	50.82	68.30	-17.48	V	Peak	Pass	Harmonic
4	802.11ac VHT20	36	5149.40	50.64	54.00	-3.36	H	AVERAGE	Pass	Band Edge
4	802.11ac VHT20	36	10360.00	50.23	68.30	-18.07	V	Peak	Pass	Harmonic
5	802.11ac VHT20	44	-	-	-	-	-	-	-	Band Edge
5	802.11ac VHT20	44	10440.00	50.36	68.30	-17.94	V	Peak	Pass	Harmonic
6	802.11ac VHT20	48	5149.52	42.72	54.00	-11.28	H	AVERAGE	Pass	Band Edge
6	802.11ac VHT20	48	10480.00	50.22	68.30	-18.08	V	Peak	Pass	Harmonic
7	802.11ac VHT40	38	5148.39	50.71	54.00	-3.29	H	AVERAGE	Pass	Band Edge
7	802.11ac VHT40	38	10380.00	47.51	68.30	-20.79	H	Peak	Pass	Harmonic
8	802.11ac VHT40	46	5149.04	48.46	54.00	-5.54	H	AVERAGE	Pass	Band Edge
8	802.11ac VHT40	46	10460.00	49.90	68.30	-18.40	V	Peak	Pass	Harmonic
9	802.11ac VHT80	42	5145.53	48.13	54.00	-5.87	H	AVERAGE	Pass	Band Edge
9	802.11ac VHT80	42	10420.00	47.66	68.30	-20.64	H	Peak	Pass	Harmonic
10	802.11a	52	-	-	-	-	-	-	-	Band Edge
10	802.11a	52	10520.00	51.03	68.30	-17.27	V	Peak	Pass	Harmonic
11	802.11a	60	-	-	-	-	-	-	-	Band Edge
11	802.11a	60	10600.00	44.25	54.00	-9.75	V	Average	Pass	Harmonic
12	802.11a	64	5350.66	49.35	54.00	-4.65	H	AVERAGE	Pass	Band Edge
12	802.11a	64	10640.00	42.60	54.00	-11.40	V	Average	Pass	Harmonic
13	802.11ac VHT20	52	-	-	-	-	-	-	-	Band Edge
13	802.11ac VHT20	52	10520.00	50.90	68.30	-17.40	V	Peak	Pass	Harmonic
14	802.11ac VHT20	60	-	-	-	-	-	-	-	Band Edge
14	802.11ac VHT20	60	10600.00	43.88	54.00	-10.12	V	Average	Pass	Harmonic
15	802.11ac VHT20	64	5356.68	48.23	54.00	-5.77	H	AVERAGE	Pass	Band Edge
15	802.11ac VHT20	64	10640.00	43.85	54.00	-10.15	V	Average	Pass	Harmonic
16	802.11ac VHT40	54	5352.65	45.77	54.00	-8.23	H	AVERAGE	Pass	Band Edge
16	802.11ac VHT40	54	10540.00	47.97	68.30	-20.33	V	Peak	Pass	Harmonic
17	802.11ac VHT40	62	5351.70	50.80	54.00	-3.20	H	AVERAGE	Pass	Band Edge
17	802.11ac VHT40	62	11530.00	50.40	74.00	23.60	V	Peak	Pass	Harmonic
18	802.11ac VHT80	58	5364.97	49.11	54.00	-4.89	H	AVERAGE	Pass	Band Edge
18	802.11ac VHT80	58	10580.00	48.27	68.30	-20.03	H	Peak	Pass	Harmonic
20	802.11a	100	5466.85	60.24	68.30	-8.06	H	PEAK	Pass	Band Edge
20	802.11a	100	11000.00	47.01	54.00	-6.99	V	Average	Pass	Harmonic
21	802.11a	116	-	-	-	-	-	-	-	Band Edge
21	802.11a	116	11160.00	47.36	54.00	-6.64	V	Average	Pass	Harmonic
22	802.11a	140	5725.16	64.01	68.30	-4.29	H	PEAK	Pass	Band Edge
22	802.11a	140	11400.00	47.06	54.00	-6.94	V	Average	Pass	Harmonic
23	802.11ac VHT20	100	5465.95	61.32	68.30	-6.98	H	PEAK	Pass	Band Edge
23	802.11ac VHT20	100	11000.00	46.12	54.00	-7.88	V	Average	Pass	Harmonic
24	802.11ac VHT20	116	-	-	-	-	-	-	-	Band Edge
24	802.11ac VHT20	116	11160.00	47.53	54.00	-6.47	V	Average	Pass	Harmonic
25	802.11ac VHT20	140	5725.74	65.06	68.30	-3.24	H	PEAK	Pass	Band Edge
25	802.11ac VHT20	140	11400.00	47.88	54.00	-6.12	V	Average	Pass	Harmonic
26	802.11ac VHT40	102	5459.92	49.21	54.00	-4.79	H	AVERAGE	Pass	Band Edge
26	802.11ac VHT40	102	11020.00	47.26	54.00	-6.74	V	Average	Pass	Harmonic
27	802.11ac VHT40	110	5460.00	44.13	54.00	-9.87	H	AVERAGE	Pass	Band Edge
27	802.11ac VHT40	110	11100.00	48.37	54.00	-5.63	V	Average	Pass	Harmonic
28	802.11ac VHT40	134	5728.43	63.36	68.30	-4.94	H	PEAK	Pass	Band Edge



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
28	802.11ac VHT40	134	17010.00	48.64	68.30	-19.66	H	Peak	Pass	Harmonic
29	802.11ac VHT80	106	5448.28	50.43	54.00	-3.57	H	AVERAGE	Pass	Band Edge
29	802.11ac VHT80	106	16590.00	48.82	68.30	-19.48	H	Peak	Pass	Harmonic
30	802.11ac VHT80	122	5731.83	57.37	68.30	-10.93	H	PEAK	Pass	Band Edge
30	802.11ac VHT80	122	16830.00	47.57	68.30	-20.73	V	Peak	Pass	Harmonic
31	802.11a	144	5459.45	41.25	54.00	-12.75	H	Average	Pass	Band Edge
31	802.11a	144	17160.00	47.92	68.30	-20.38	V	Peak	Pass	Harmonic
32	802.11ac VHT20	144	5460.00	41.20	54.00	-12.80	V	Average	Pass	Band Edge
32	802.11ac VHT20	144	17160.00	48.03	68.30	-20.27	V	Peak	Pass	Harmonic
33	802.11ac VHT40	142	5457.25	42.62	54.00	-11.38	V	Average	Pass	Band Edge
33	802.11ac VHT40	142	17130.00	48.59	68.30	-19.71	H	Peak	Pass	Harmonic
34	802.11ac VHT80	138	5458.35	42.66	54.00	-11.34	V	Average	Pass	Band Edge
34	802.11ac VHT80	138	17070.00	48.31	68.30	-19.99	V	Peak	Pass	Harmonic
35	802.11ac VHT40	62	52.31	30.43	40.00	-9.57	V	Peak	Pass	LF
36	802.11a	149	561334	53.94	68.30	-14.36	H	PEAK	Pass	Band Edge
36	802.11a	149	17235.00	48.43	68.30	-19.87	H	Peak	Pass	Harmonic
37	802.11a	157	5945.71	52.58	68.30	-15.72	H	PEAK	Pass	Band Edge
37	802.11a	157	17355.00	48.46	68.30	-19.84	H	Peak	Pass	Harmonic
38	802.11a	165	5931.63	53.02	68.30	-15.28	V	PEAK	Pass	Band Edge
38	802.11a	165	17475.00	49.93	68.30	-18.37	V	Peak	Pass	Harmonic
39	802.11ac VHT20	149	5635.24	53.03	68.30	-15.27	V	PEAK	Pass	Band Edge
39	802.11ac VHT20	149	17235.00	49.03	68.30	-19.27	V	Peak	Pass	Harmonic
40	802.11ac VHT20	157	5932.35	53.68	68.30	-14.62	H	PEAK	Pass	Band Edge
40	802.11ac VHT20	157	17355.00	49.81	68.30	-18.49	V	Peak	Pass	Harmonic
41	802.11ac VHT20	165	5943.25	52.42	68.30	-15.88	H	PEAK	Pass	Band Edge
41	802.11ac VHT20	165	17475.00	50.34	68.30	-17.96	V	Peak	Pass	Harmonic
42	802.11ac VHT40	151	5641.08	53.57	68.30	-14.73	H	PEAK	Pass	Band Edge
42	802.11ac VHT40	151	17265.00	48.91	68.30	-19.39	H	Peak	Pass	Harmonic
43	802.11ac VHT40	159	5932.33	53.01	68.30	-15.29	H	PEAK	Pass	Band Edge
43	802.11ac VHT40	159	17385.00	49.04	68.30	-19.26	H	Peak	Pass	Harmonic
44	802.11ac VHT80	155	5641.30	54.50	68.30	-13.80	H	PEAK	Pass	Band Edge
44	802.11ac VHT80	155	17325.00	49.28	68.30	-19.02	H	Peak	Pass	Harmonic
45	802.11ac VHT80	155	56.19	30.52	40.00	-9.48	V	Peak	Pass	LF
46	802.11ac VHT40	62	5350.80	48.64	54.00	-5.36	H	AVERAGE	Pass	Band Edge
46	802.11ac VHT40	62	10620.00	48.01	74.00	-25.99	V	Peak	Pass	Harmonic



Mode	1																																																																									
	Band Edge																																																																									
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																									
ANT	5																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.94</td> <td>62.94</td> <td>74.00</td> <td>-11.06</td> <td>50.96</td> <td>36.11</td> <td>8.54</td> <td>32.67</td> <td>100</td> <td>105</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5149.94	62.94	74.00	-11.06	50.96	36.11	8.54	32.67	100	105	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>109.04</td> <td>-----</td> <td>-----</td> <td>97.03</td> <td>36.09</td> <td>8.58</td> <td>32.66</td> <td>100</td> <td>105</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5180.00	109.04	-----	-----	97.03	36.09	8.58	32.66	100	105	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5149.94	62.94	74.00	-11.06	50.96	36.11	8.54	32.67	100	105	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5180.00	109.04	-----	-----	97.03	36.09	8.58	32.66	100	105	PEAK																																																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.94</td> <td>50.53</td> <td>54.00</td> <td>-3.47</td> <td>38.55</td> <td>36.11</td> <td>8.54</td> <td>32.67</td> <td>100</td> <td>105</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5149.94	50.53	54.00	-3.47	38.55	36.11	8.54	32.67	100	105	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>102.68</td> <td>-----</td> <td>-----</td> <td>90.66</td> <td>36.09</td> <td>8.59</td> <td>32.66</td> <td>100</td> <td>105</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5180.00	102.68	-----	-----	90.66	36.09	8.59	32.66	100	105	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5149.94	50.53	54.00	-3.47	38.55	36.11	8.54	32.67	100	105	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5180.00	102.68	-----	-----	90.66	36.09	8.59	32.66	100	105	AVERAGE																																																															



Mode	1																																																																									
	Band Edge																																																																									
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																									
ANT	5																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<p style="text-align: right;">Date: 2024-04-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5147.42</td> <td>58.48</td> <td>74.00</td> <td>-15.52</td> <td>46.51</td> <td>36.11</td> <td>8.53</td> <td>32.67</td> <td>397</td> <td>227</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5147.42	58.48	74.00	-15.52	46.51	36.11	8.53	32.67	397	227	PEAK	<p style="text-align: right;">Date: 2024-04-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>101.27</td> <td>-----</td> <td>-----</td> <td>89.26</td> <td>36.09</td> <td>8.58</td> <td>32.66</td> <td>397</td> <td>227</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5180.00	101.27	-----	-----	89.26	36.09	8.58	32.66	397	227	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5147.42	58.48	74.00	-15.52	46.51	36.11	8.53	32.67	397	227	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5180.00	101.27	-----	-----	89.26	36.09	8.58	32.66	397	227	PEAK																																																															
Avg	<p style="text-align: right;">Date: 2024-04-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.76</td> <td>45.79</td> <td>54.00</td> <td>-8.21</td> <td>33.81</td> <td>36.11</td> <td>8.54</td> <td>32.67</td> <td>397</td> <td>227</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5149.76	45.79	54.00	-8.21	33.81	36.11	8.54	32.67	397	227	AVERAGE	<p style="text-align: right;">Date: 2024-04-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>95.30</td> <td>-----</td> <td>-----</td> <td>83.29</td> <td>36.09</td> <td>8.58</td> <td>32.66</td> <td>397</td> <td>227</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5180.00	95.30	-----	-----	83.29	36.09	8.58	32.66	397	227	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5149.76	45.79	54.00	-8.21	33.81	36.11	8.54	32.67	397	227	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5180.00	95.30	-----	-----	83.29	36.09	8.58	32.66	397	227	AVERAGE																																																															





Mode	1																																																																																																
	Harmonic																																																																																																
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																
ANT	5																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-04-14</p>	<p>Date: 2024-04-14</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>47.85</td> <td>68.30</td> <td>-20.45</td> <td>60.71</td> <td>38.74</td> <td>12.06</td> <td>63.66</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>49.98</td> <td>74.00</td> <td>-24.02</td> <td>58.66</td> <td>40.73</td> <td>14.58</td> <td>63.99</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10360.00	47.85	68.30	-20.45	60.71	38.74	12.06	63.66	---	---	Peak	2	15540.00	49.98	74.00	-24.02	58.66	40.73	14.58	63.99	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>50.41</td> <td>68.30</td> <td>-17.89</td> <td>63.27</td> <td>38.74</td> <td>12.06</td> <td>63.66</td> <td>100</td> <td>299</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>48.69</td> <td>74.00</td> <td>-25.31</td> <td>57.37</td> <td>40.73</td> <td>14.58</td> <td>63.99</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10360.00	50.41	68.30	-17.89	63.27	38.74	12.06	63.66	100	299	Peak	2	15540.00	48.69	74.00	-25.31	57.37	40.73	14.58	63.99	---	---
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	10360.00	47.85	68.30	-20.45	60.71	38.74	12.06	63.66	---	---	Peak																																																																																						
2	15540.00	49.98	74.00	-24.02	58.66	40.73	14.58	63.99	---	---	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	10360.00	50.41	68.30	-17.89	63.27	38.74	12.06	63.66	100	299	Peak																																																																																						
2	15540.00	48.69	74.00	-25.31	57.37	40.73	14.58	63.99	---	---	Peak																																																																																						



Mode	2																																																																																																	
	Harmonic																																																																																																	
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																																	
ANT	5																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>47.34</td> <td>68.30</td> <td>-20.96</td> <td>60.07</td> <td>38.78</td> <td>12.12</td> <td>63.63</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>50.12</td> <td>74.00</td> <td>-23.88</td> <td>58.68</td> <td>40.83</td> <td>14.64</td> <td>64.03</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10440.00	47.34	68.30	-20.96	60.07	38.78	12.12	63.63	---	---	Peak	2	15660.00	50.12	74.00	-23.88	58.68	40.83	14.64	64.03	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>50.95</td> <td>68.30</td> <td>-17.35</td> <td>63.68</td> <td>38.78</td> <td>12.12</td> <td>63.63</td> <td>100</td> <td>288</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>50.76</td> <td>74.00</td> <td>-23.24</td> <td>59.32</td> <td>40.83</td> <td>14.64</td> <td>64.03</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10440.00	50.95	68.30	-17.35	63.68	38.78	12.12	63.63	100	288	Peak	2	15660.00	50.76	74.00	-23.24	59.32	40.83	14.64	64.03	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10440.00	47.34	68.30	-20.96	60.07	38.78	12.12	63.63	---	---	Peak																																																																																							
2	15660.00	50.12	74.00	-23.88	58.68	40.83	14.64	64.03	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10440.00	50.95	68.30	-17.35	63.68	38.78	12.12	63.63	100	288	Peak																																																																																							
2	15660.00	50.76	74.00	-23.24	59.32	40.83	14.64	64.03	---	---	Peak																																																																																							



Mode	3																																																																							
	Band Edge - L																																																																							
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																							
ANT	5																																																																							
Pol.	Horizontal	Fundamental																																																																						
Peak	<p>Date: 2024-04-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5135.84</td> <td>52.70</td> <td>74.00</td> <td>-21.30</td> <td>40.74</td> <td>36.12</td> <td>8.51</td> <td>32.67</td> <td>126</td> <td>116 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5135.84	52.70	74.00	-21.30	40.74	36.12	8.51	32.67	126	116 PEAK	<p>Date: 2024-04-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5240.00</td> <td>108.47</td> <td>-----</td> <td>-----</td> <td>96.26</td> <td>36.05</td> <td>8.81</td> <td>32.65</td> <td>126</td> <td>116 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5240.00	108.47	-----	-----	96.26	36.05	8.81	32.65	126	116 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1 5135.84	52.70	74.00	-21.30	40.74	36.12	8.51	32.67	126	116 PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1 5240.00	108.47	-----	-----	96.26	36.05	8.81	32.65	126	116 PEAK																																																															
Avg	<p>Date: 2024-04-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5147.36</td> <td>43.11</td> <td>54.00</td> <td>-10.89</td> <td>31.14</td> <td>36.11</td> <td>8.53</td> <td>32.67</td> <td>126</td> <td>116 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5147.36	43.11	54.00	-10.89	31.14	36.11	8.53	32.67	126	116 AVERAGE	<p>Date: 2024-04-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5240.00</td> <td>101.76</td> <td>-----</td> <td>-----</td> <td>89.55</td> <td>36.05</td> <td>8.81</td> <td>32.65</td> <td>126</td> <td>116 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5240.00	101.76	-----	-----	89.55	36.05	8.81	32.65	126	116 AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1 5147.36	43.11	54.00	-10.89	31.14	36.11	8.53	32.67	126	116 AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1 5240.00	101.76	-----	-----	89.55	36.05	8.81	32.65	126	116 AVERAGE																																																															



Mode	3																																									
	Band Edge - R																																									
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																									
ANT	5																																									
Pol.	Horizontal	Fundamental																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5443.28</td> <td>51.24</td> <td>74.00</td> <td>-22.76</td> <td>38.24</td> <td>35.93</td> <td>9.68</td> <td>32.61</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>126</td> <td>116 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5443.28	51.24	74.00	-22.76	38.24	35.93	9.68	32.61							126	116 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																			
1 5443.28	51.24	74.00	-22.76	38.24	35.93	9.68	32.61																																			
						126	116 PEAK																																			
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5458.46</td> <td>41.59</td> <td>54.00</td> <td>-12.41</td> <td>28.59</td> <td>35.92</td> <td>9.69</td> <td>32.61</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>126</td> <td>116 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5458.46	41.59	54.00	-12.41	28.59	35.92	9.69	32.61							126	116 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																			
1 5458.46	41.59	54.00	-12.41	28.59	35.92	9.69	32.61																																			
						126	116 AVERAGE																																			



Mode	3																																																																									
	Band Edge - L																																																																									
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																									
ANT	5																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5050.40</td> <td>51.61</td> <td>74.00</td> <td>-22.39</td> <td>39.78</td> <td>36.17</td> <td>8.35</td> <td>32.69</td> <td>400</td> <td>140</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5050.40	51.61	74.00	-22.39	39.78	36.17	8.35	32.69	400	140	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5240.00</td> <td>90.12</td> <td>-----</td> <td>-----</td> <td>77.94</td> <td>36.06</td> <td>8.77</td> <td>32.65</td> <td>400</td> <td>140</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5240.00	90.12	-----	-----	77.94	36.06	8.77	32.65	400	140	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5050.40	51.61	74.00	-22.39	39.78	36.17	8.35	32.69	400	140	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5240.00	90.12	-----	-----	77.94	36.06	8.77	32.65	400	140	PEAK																																																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5067.44</td> <td>42.00</td> <td>54.00</td> <td>-12.00</td> <td>30.15</td> <td>36.16</td> <td>8.38</td> <td>32.69</td> <td>400</td> <td>140</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5067.44	42.00	54.00	-12.00	30.15	36.16	8.38	32.69	400	140	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5240.00</td> <td>83.79</td> <td>-----</td> <td>-----</td> <td>71.61</td> <td>36.06</td> <td>8.77</td> <td>32.65</td> <td>400</td> <td>140</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5240.00	83.79	-----	-----	71.61	36.06	8.77	32.65	400	140	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5067.44	42.00	54.00	-12.00	30.15	36.16	8.38	32.69	400	140	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5240.00	83.79	-----	-----	71.61	36.06	8.77	32.65	400	140	AVERAGE																																																															



Mode	3																																					
	Band Edge - R																																					
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																					
ANT	5																																					
Pol.	Vertical	Fundamental																																				
Peak	<p>Date: 2024-04-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5419.96</td> <td>50.85</td> <td>74.00</td> <td>-23.15</td> <td>37.85</td> <td>35.95</td> <td>9.67</td> <td>32.62</td> <td>400</td> <td>140</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5419.96	50.85	74.00	-23.15	37.85	35.95	9.67	32.62	400	140	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5419.96	50.85	74.00	-23.15	37.85	35.95	9.67	32.62	400	140	PEAK																											
Avg	<p>Date: 2024-04-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5428.76</td> <td>41.52</td> <td>54.00</td> <td>-12.48</td> <td>28.52</td> <td>35.94</td> <td>9.67</td> <td>32.61</td> <td>400</td> <td>140</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5428.76	41.52	54.00	-12.48	28.52	35.94	9.67	32.61	400	140	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5428.76	41.52	54.00	-12.48	28.52	35.94	9.67	32.61	400	140	AVERAGE																											



Mode	3																																																																																																	
	Harmonic																																																																																																	
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																																	
ANT	5																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p>Date: 2024-04-14</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>47.18</td> <td>68.30</td> <td>-21.12</td> <td>59.85</td> <td>38.79</td> <td>12.15</td> <td>63.61</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>49.24</td> <td>74.00</td> <td>-24.76</td> <td>57.75</td> <td>40.88</td> <td>14.66</td> <td>64.05</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10480.00	47.18	68.30	-21.12	59.85	38.79	12.15	63.61	---	---	Peak	2	15720.00	49.24	74.00	-24.76	57.75	40.88	14.66	64.05	---	---	Peak	<p>Date: 2024-04-14</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>50.82</td> <td>68.30</td> <td>-17.48</td> <td>63.49</td> <td>38.79</td> <td>12.15</td> <td>63.61</td> <td>100</td> <td>286</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>50.54</td> <td>74.00</td> <td>-23.46</td> <td>59.05</td> <td>40.88</td> <td>14.66</td> <td>64.05</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10480.00	50.82	68.30	-17.48	63.49	38.79	12.15	63.61	100	286	Peak	2	15720.00	50.54	74.00	-23.46	59.05	40.88	14.66	64.05	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10480.00	47.18	68.30	-21.12	59.85	38.79	12.15	63.61	---	---	Peak																																																																																							
2	15720.00	49.24	74.00	-24.76	57.75	40.88	14.66	64.05	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10480.00	50.82	68.30	-17.48	63.49	38.79	12.15	63.61	100	286	Peak																																																																																							
2	15720.00	50.54	74.00	-23.46	59.05	40.88	14.66	64.05	---	---	Peak																																																																																							



Mode	4																																																																							
	Band Edge																																																																							
	U-NII-1_5.15-5.25_802.11ac VHT20_CH36_5180MHz																																																																							
ANT	5																																																																							
Pol.	Horizontal	Fundamental																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5141.66</td> <td>61.80</td> <td>74.00</td> <td>-12.20</td> <td>49.83</td> <td>36.12</td> <td>8.52</td> <td>32.67</td> <td>116</td> <td>105</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5141.66	61.80	74.00	-12.20	49.83	36.12	8.52	32.67	116	105	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5180.00</td> <td>109.15</td> <td>-----</td> <td>-----</td> <td>97.14</td> <td>36.09</td> <td>8.58</td> <td>32.66</td> <td>116</td> <td>105</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5180.00	109.15	-----	-----	97.14	36.09	8.58	32.66	116	105	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																	
1 5141.66	61.80	74.00	-12.20	49.83	36.12	8.52	32.67	116	105	PEAK																																																														
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																	
1 5180.00	109.15	-----	-----	97.14	36.09	8.58	32.66	116	105	PEAK																																																														
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5149.40</td> <td>50.64</td> <td>54.00</td> <td>-3.36</td> <td>38.67</td> <td>36.11</td> <td>8.53</td> <td>32.67</td> <td>116</td> <td>105</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5149.40	50.64	54.00	-3.36	38.67	36.11	8.53	32.67	116	105	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5180.00</td> <td>102.53</td> <td>-----</td> <td>-----</td> <td>90.51</td> <td>36.09</td> <td>8.59</td> <td>32.66</td> <td>116</td> <td>105</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5180.00	102.53	-----	-----	90.51	36.09	8.59	32.66	116	105	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																	
1 5149.40	50.64	54.00	-3.36	38.67	36.11	8.53	32.67	116	105	AVERAGE																																																														
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																	
1 5180.00	102.53	-----	-----	90.51	36.09	8.59	32.66	116	105	AVERAGE																																																														





Mode	4																																																																									
	Band Edge																																																																									
	U-NII-1_5.15-5.25_802.11ac VHT20_CH36_5180MHz																																																																									
ANT	5																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.68</td> <td>58.27</td> <td>74.00</td> <td>-15.73</td> <td>46.30</td> <td>36.11</td> <td>8.53</td> <td>32.67</td> <td>399</td> <td>227</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5148.68	58.27	74.00	-15.73	46.30	36.11	8.53	32.67	399	227	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>100.51</td> <td>-----</td> <td>-----</td> <td>88.50</td> <td>36.09</td> <td>8.58</td> <td>32.66</td> <td>399</td> <td>227</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5180.00	100.51	-----	-----	88.50	36.09	8.58	32.66	399	227	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5148.68	58.27	74.00	-15.73	46.30	36.11	8.53	32.67	399	227	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5180.00	100.51	-----	-----	88.50	36.09	8.58	32.66	399	227	PEAK																																																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.50</td> <td>45.99</td> <td>54.00</td> <td>-8.01</td> <td>34.02</td> <td>36.11</td> <td>8.53</td> <td>32.67</td> <td>399</td> <td>227</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5148.50	45.99	54.00	-8.01	34.02	36.11	8.53	32.67	399	227	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>93.89</td> <td>-----</td> <td>-----</td> <td>81.88</td> <td>36.09</td> <td>8.58</td> <td>32.66</td> <td>399</td> <td>227</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5180.00	93.89	-----	-----	81.88	36.09	8.58	32.66	399	227	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5148.50	45.99	54.00	-8.01	34.02	36.11	8.53	32.67	399	227	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5180.00	93.89	-----	-----	81.88	36.09	8.58	32.66	399	227	AVERAGE																																																															



Mode	4																																																																																																			
	Harmonic																																																																																																			
	U-NII-1_5.15-5.25_802.11ac VHT20_CH36_5180MHz																																																																																																			
ANT	5																																																																																																			
Pol.	Horizontal	Vertical																																																																																																		
Peak Avg	<p>Date: 2024-04-14</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>46.79</td> <td>68.30</td> <td>-21.51</td> <td>59.65</td> <td>38.74</td> <td>12.06</td> <td>63.66</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>48.65</td> <td>74.00</td> <td>-25.35</td> <td>57.33</td> <td>40.73</td> <td>14.58</td> <td>63.99</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10360.00	46.79	68.30	-21.51	59.65	38.74	12.06	63.66	---	---	Peak	2	15540.00	48.65	74.00	-25.35	57.33	40.73	14.58	63.99	---	---	Peak	<p>Date: 2024-04-14</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>50.23</td> <td>68.30</td> <td>-18.07</td> <td>63.09</td> <td>38.74</td> <td>12.06</td> <td>63.66</td> <td>100</td> <td>291</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>49.28</td> <td>74.00</td> <td>-24.72</td> <td>57.96</td> <td>40.73</td> <td>14.58</td> <td>63.99</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10360.00	50.23	68.30	-18.07	63.09	38.74	12.06	63.66	100	291	Peak	2	15540.00	49.28	74.00	-24.72	57.96	40.73	14.58	63.99	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																												
1	10360.00	46.79	68.30	-21.51	59.65	38.74	12.06	63.66	---	---	Peak																																																																																									
2	15540.00	48.65	74.00	-25.35	57.33	40.73	14.58	63.99	---	---	Peak																																																																																									
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																												
1	10360.00	50.23	68.30	-18.07	63.09	38.74	12.06	63.66	100	291	Peak																																																																																									
2	15540.00	49.28	74.00	-24.72	57.96	40.73	14.58	63.99	---	---	Peak																																																																																									



Mode	5																																																																																																	
	Harmonic																																																																																																	
	U-NII-1_5.15-5.25_802.11ac VHT20_CH44_5220MHz																																																																																																	
ANT	5																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p>Date: 2024-04-14</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>47.35</td> <td>68.30</td> <td>-20.95</td> <td>60.08</td> <td>38.78</td> <td>12.12</td> <td>63.63</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>49.13</td> <td>74.00</td> <td>-24.87</td> <td>57.69</td> <td>40.83</td> <td>14.64</td> <td>64.03</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10440.00	47.35	68.30	-20.95	60.08	38.78	12.12	63.63	---	---	Peak	2	15660.00	49.13	74.00	-24.87	57.69	40.83	14.64	64.03	---	---	Peak	<p>Date: 2024-04-14</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>50.36</td> <td>68.30</td> <td>-17.94</td> <td>63.09</td> <td>38.78</td> <td>12.12</td> <td>63.63</td> <td>100</td> <td>287</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>48.68</td> <td>74.00</td> <td>-25.32</td> <td>57.24</td> <td>40.83</td> <td>14.64</td> <td>64.03</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10440.00	50.36	68.30	-17.94	63.09	38.78	12.12	63.63	100	287	Peak	2	15660.00	48.68	74.00	-25.32	57.24	40.83	14.64	64.03	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10440.00	47.35	68.30	-20.95	60.08	38.78	12.12	63.63	---	---	Peak																																																																																							
2	15660.00	49.13	74.00	-24.87	57.69	40.83	14.64	64.03	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10440.00	50.36	68.30	-17.94	63.09	38.78	12.12	63.63	100	287	Peak																																																																																							
2	15660.00	48.68	74.00	-25.32	57.24	40.83	14.64	64.03	---	---	Peak																																																																																							



Mode	6																																																																									
	Band Edge - L																																																																									
	U-NII-1_5.15-5.25_802.11ac VHT20_CH48_5240MHz																																																																									
ANT	5																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<p>Date: 2024-04-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5016.80</td> <td>52.09</td> <td>74.00</td> <td>-21.91</td> <td>40.31</td> <td>36.19</td> <td>8.29</td> <td>32.70</td> <td>100</td> <td>99</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5016.80	52.09	74.00	-21.91	40.31	36.19	8.29	32.70	100	99	PEAK	<p>Date: 2024-04-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5240.00</td> <td>108.25</td> <td>-----</td> <td>-----</td> <td>96.07</td> <td>36.06</td> <td>8.77</td> <td>32.65</td> <td>100</td> <td>99</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5240.00	108.25	-----	-----	96.07	36.06	8.77	32.65	100	99	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5016.80	52.09	74.00	-21.91	40.31	36.19	8.29	32.70	100	99	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5240.00	108.25	-----	-----	96.07	36.06	8.77	32.65	100	99	PEAK																																																															
Avg	<p>Date: 2024-04-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.52</td> <td>42.72</td> <td>54.00</td> <td>-11.28</td> <td>30.75</td> <td>36.11</td> <td>8.53</td> <td>32.67</td> <td>100</td> <td>99</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5149.52	42.72	54.00	-11.28	30.75	36.11	8.53	32.67	100	99	AVERAGE	<p>Date: 2024-04-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5240.00</td> <td>101.09</td> <td>-----</td> <td>-----</td> <td>88.88</td> <td>36.05</td> <td>8.81</td> <td>32.65</td> <td>100</td> <td>99</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5240.00	101.09	-----	-----	88.88	36.05	8.81	32.65	100	99	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5149.52	42.72	54.00	-11.28	30.75	36.11	8.53	32.67	100	99	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5240.00	101.09	-----	-----	88.88	36.05	8.81	32.65	100	99	AVERAGE																																																															



Mode	6																																			
	Band Edge - R																																			
	U-NII-1_5.15-5.25_802.11ac VHT20_CH48_5240MHz																																			
ANT	5																																			
Pol.	Horizontal	Fundamental																																		
Peak	<p>Date: 2024-04-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5439.08</td> <td>50.89</td> <td>74.00</td> <td>-23.11</td> <td>37.89</td> <td>35.94</td> <td>9.67</td> <td>32.61</td> <td>100</td> <td>99 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5439.08	50.89	74.00	-23.11	37.89	35.94	9.67	32.61	100	99 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																													
1 5439.08	50.89	74.00	-23.11	37.89	35.94	9.67	32.61	100	99 PEAK																											
Avg	<p>Date: 2024-04-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5439.32</td> <td>41.54</td> <td>54.00</td> <td>-12.46</td> <td>28.53</td> <td>35.94</td> <td>9.68</td> <td>32.61</td> <td>100</td> <td>99 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5439.32	41.54	54.00	-12.46	28.53	35.94	9.68	32.61	100	99 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																													
1 5439.32	41.54	54.00	-12.46	28.53	35.94	9.68	32.61	100	99 AVERAGE																											



Mode	6																																																																					
	Band Edge - L																																																																					
	U-NII-1_5.15-5.25_802.11ac VHT20_CH48_5240MHz																																																																					
ANT	5																																																																					
Pol.	Vertical	Fundamental																																																																				
Peak	<p>Date: 2024-04-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5035.04</td> <td>51.89</td> <td>74.00</td> <td>-22.11</td> <td>40.08</td> <td>36.18</td> <td>8.32</td> <td>32.69</td> <td>300</td> <td>181 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5035.04	51.89	74.00	-22.11	40.08	36.18	8.32	32.69	300	181 PEAK	<p>Date: 2024-04-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5240.00</td> <td>96.91</td> <td>-----</td> <td>-----</td> <td>84.73</td> <td>36.06</td> <td>8.77</td> <td>32.65</td> <td>300</td> <td>181 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5240.00	96.91	-----	-----	84.73	36.06	8.77	32.65	300	181 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																														
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																															
1 5035.04	51.89	74.00	-22.11	40.08	36.18	8.32	32.69	300	181 PEAK																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																															
1 5240.00	96.91	-----	-----	84.73	36.06	8.77	32.65	300	181 PEAK																																																													
Avg	<p>Date: 2024-04-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5073.68</td> <td>42.08</td> <td>54.00</td> <td>-11.92</td> <td>30.22</td> <td>36.16</td> <td>8.39</td> <td>32.69</td> <td>300</td> <td>181 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5073.68	42.08	54.00	-11.92	30.22	36.16	8.39	32.69	300	181 AVERAGE	<p>Date: 2024-04-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5240.00</td> <td>90.01</td> <td>-----</td> <td>-----</td> <td>77.83</td> <td>36.06</td> <td>8.77</td> <td>32.65</td> <td>300</td> <td>181 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5240.00	90.01	-----	-----	77.83	36.06	8.77	32.65	300	181 AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																															
1 5073.68	42.08	54.00	-11.92	30.22	36.16	8.39	32.69	300	181 AVERAGE																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																															
1 5240.00	90.01	-----	-----	77.83	36.06	8.77	32.65	300	181 AVERAGE																																																													



Mode	6																																									
	Band Edge - R																																									
	U-NII-1_5.15-5.25_802.11ac VHT20_CH48_5240MHz																																									
ANT	5																																									
Pol.	Vertical	Fundamental																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5414.90</td> <td>50.66</td> <td>74.00</td> <td>-23.34</td> <td>37.67</td> <td>35.95</td> <td>9.66</td> <td>32.62</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>300</td> <td>181 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5414.90	50.66	74.00	-23.34	37.67	35.95	9.66	32.62							300	181 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																			
1 5414.90	50.66	74.00	-23.34	37.67	35.95	9.66	32.62																																			
						300	181 PEAK																																			
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5458.24</td> <td>41.55</td> <td>54.00</td> <td>-12.45</td> <td>28.54</td> <td>35.93</td> <td>9.69</td> <td>32.61</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>300</td> <td>181 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5458.24	41.55	54.00	-12.45	28.54	35.93	9.69	32.61							300	181 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																			
1 5458.24	41.55	54.00	-12.45	28.54	35.93	9.69	32.61																																			
						300	181 AVERAGE																																			



Mode	6																																																																																															
	Harmonic																																																																																															
	U-NII-1_5.15-5.25_802.11ac VHT20_CH48_5240MHz																																																																																															
ANT	5																																																																																															
Pol.	Horizontal	Vertical																																																																																														
Peak Avg	<p>Date: 2024-04-14</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>49.05</td> <td>68.30</td> <td>-19.25</td> <td>61.72</td> <td>38.79</td> <td>12.15</td> <td>63.61</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>50.03</td> <td>74.00</td> <td>-23.97</td> <td>58.54</td> <td>40.88</td> <td>14.66</td> <td>64.05</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10480.00	49.05	68.30	-19.25	61.72	38.79	12.15	63.61	---	---	Peak	2	15720.00	50.03	74.00	-23.97	58.54	40.88	14.66	64.05	---	---	Peak	<p>Date: 2024-04-14</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>50.22</td> <td>68.30</td> <td>-18.08</td> <td>62.89</td> <td>38.79</td> <td>12.15</td> <td>63.61</td> <td>100</td> <td>284</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>49.42</td> <td>74.00</td> <td>-24.58</td> <td>57.93</td> <td>40.88</td> <td>14.66</td> <td>64.05</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10480.00	50.22	68.30	-18.08	62.89	38.79	12.15	63.61	100	284	Peak	2	15720.00	49.42	74.00	-24.58	57.93	40.88	14.66	64.05	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	10480.00	49.05	68.30	-19.25	61.72	38.79	12.15	63.61	---	---	Peak																																																																																					
2	15720.00	50.03	74.00	-23.97	58.54	40.88	14.66	64.05	---	---	Peak																																																																																					
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	10480.00	50.22	68.30	-18.08	62.89	38.79	12.15	63.61	100	284	Peak																																																																																					
2	15720.00	49.42	74.00	-24.58	57.93	40.88	14.66	64.05	---	---	Peak																																																																																					









Mode	7																																																																																	
	Band Edge - L																																																																																	
	U-NII-1_5.15-5.25_802.11ac VHT40_CH38_5190MHz																																																																																	
ANT	5																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5149.34</td> <td>61.09</td> <td>74.00</td> <td>-12.91</td> <td>49.12</td> <td>36.11</td> <td>8.53</td> <td>32.67</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>100</td> <td>117 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5149.34	61.09	74.00	-12.91	49.12	36.11	8.53	32.67							100	117 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5190.00</td> <td>101.91</td> <td>-----</td> <td>-----</td> <td>89.87</td> <td>36.08</td> <td>8.62</td> <td>32.66</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>100</td> <td>117 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5190.00	101.91	-----	-----	89.87	36.08	8.62	32.66							100	117 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																											
1 5149.34	61.09	74.00	-12.91	49.12	36.11	8.53	32.67																																																																											
						100	117 PEAK																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																											
1 5190.00	101.91	-----	-----	89.87	36.08	8.62	32.66																																																																											
						100	117 PEAK																																																																											
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5148.39</td> <td>50.71</td> <td>54.00</td> <td>-3.29</td> <td>38.74</td> <td>36.11</td> <td>8.53</td> <td>32.67</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>100</td> <td>117 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5148.39	50.71	54.00	-3.29	38.74	36.11	8.53	32.67							100	117 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5190.00</td> <td>96.28</td> <td>-----</td> <td>-----</td> <td>84.24</td> <td>36.09</td> <td>8.61</td> <td>32.66</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>100</td> <td>117 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5190.00	96.28	-----	-----	84.24	36.09	8.61	32.66							100	117 AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																											
1 5148.39	50.71	54.00	-3.29	38.74	36.11	8.53	32.67																																																																											
						100	117 AVERAGE																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																											
1 5190.00	96.28	-----	-----	84.24	36.09	8.61	32.66																																																																											
						100	117 AVERAGE																																																																											



	7																																					
Mode	Band Edge - R																																					
	U-NII-1_5.15-5.25_802.11ac VHT40_CH38_5190MHz																																					
ANT	5																																					
Pol.	Horizontal	Fundamental																																				
Peak	<p style="text-align: right;">Date: 2024-04-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5424.09</td> <td>50.98</td> <td>74.00</td> <td>-23.02</td> <td>37.98</td> <td>35.95</td> <td>9.67</td> <td>32.62</td> <td>100</td> <td>117</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5424.09	50.98	74.00	-23.02	37.98	35.95	9.67	32.62	100	117	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																															
1	5424.09	50.98	74.00	-23.02	37.98	35.95	9.67	32.62	100	117	PEAK																											
Blank																																						
Avg	<p style="text-align: right;">Date: 2024-04-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5419.23</td> <td>42.46</td> <td>54.00</td> <td>-11.54</td> <td>29.46</td> <td>35.95</td> <td>9.67</td> <td>32.62</td> <td>100</td> <td>117</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5419.23	42.46	54.00	-11.54	29.46	35.95	9.67	32.62	100	117	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																															
1	5419.23	42.46	54.00	-11.54	29.46	35.95	9.67	32.62	100	117	AVERAGE																											
Blank																																						

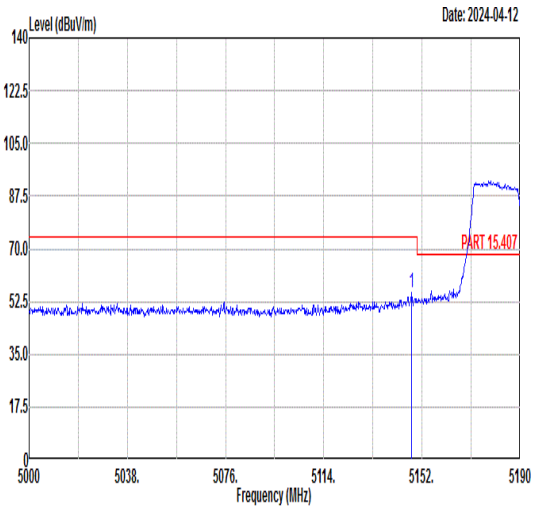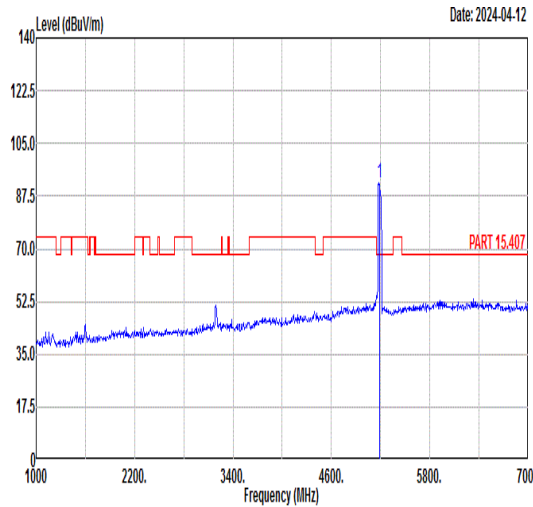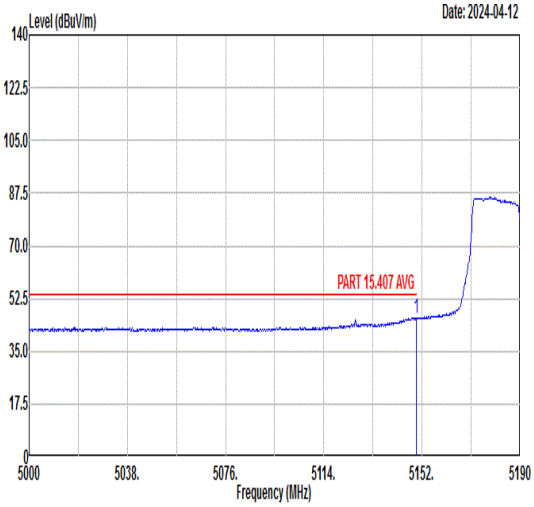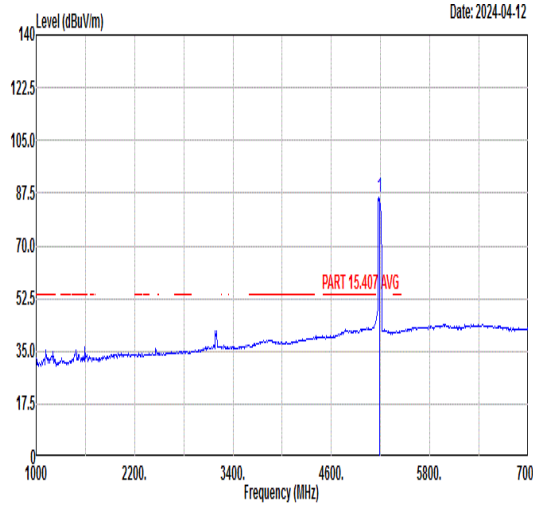

Mode	7																																																																									
	Band Edge - L																																																																									
	U-NII-1_5.15-5.25_802.11ac VHT40_CH38_5190MHz																																																																									
ANT	5																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	 <p>Date: 2024-04-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5147.82</td> <td>55.38</td> <td>74.00</td> <td>-18.62</td> <td>43.41</td> <td>36.11</td> <td>8.53</td> <td>32.67</td> <td>371</td> <td>221</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5147.82	55.38	74.00	-18.62	43.41	36.11	8.53	32.67	371	221	PEAK	 <p>Date: 2024-04-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>91.87</td> <td>-----</td> <td>-----</td> <td>79.85</td> <td>36.09</td> <td>8.59</td> <td>32.66</td> <td>371</td> <td>221</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5190.00	91.87	-----	-----	79.85	36.09	8.59	32.66	371	221	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5147.82	55.38	74.00	-18.62	43.41	36.11	8.53	32.67	371	221	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5190.00	91.87	-----	-----	79.85	36.09	8.59	32.66	371	221	PEAK																																																															
Avg	 <p>Date: 2024-04-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.91</td> <td>45.99</td> <td>54.00</td> <td>-8.01</td> <td>34.01</td> <td>36.11</td> <td>8.54</td> <td>32.67</td> <td>371</td> <td>221</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5149.91	45.99	54.00	-8.01	34.01	36.11	8.54	32.67	371	221	AVERAGE	 <p>Date: 2024-04-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>85.85</td> <td>-----</td> <td>-----</td> <td>73.84</td> <td>36.09</td> <td>8.58</td> <td>32.66</td> <td>371</td> <td>221</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5190.00	85.85	-----	-----	73.84	36.09	8.58	32.66	371	221	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5149.91	45.99	54.00	-8.01	34.01	36.11	8.54	32.67	371	221	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5190.00	85.85	-----	-----	73.84	36.09	8.58	32.66	371	221	AVERAGE																																																															



Mode	7																																					
	Band Edge - R																																					
	U-NII-1_5.15-5.25_802.11ac VHT40_CH38_5190MHz																																					
ANT	5																																					
Pol.	Vertical	Fundamental																																				
Peak	<p>Date: 2024-04-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5399.79</td> <td>51.12</td> <td>74.00</td> <td>-22.88</td> <td>38.16</td> <td>35.96</td> <td>9.62</td> <td>32.62</td> <td>371</td> <td>221</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5399.79	51.12	74.00	-22.88	38.16	35.96	9.62	32.62	371	221	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																															
1	5399.79	51.12	74.00	-22.88	38.16	35.96	9.62	32.62	371	221	PEAK																											
Avg	<p>Date: 2024-04-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5439.75</td> <td>42.36</td> <td>54.00</td> <td>-11.64</td> <td>29.35</td> <td>35.94</td> <td>9.68</td> <td>32.61</td> <td>371</td> <td>221</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5439.75	42.36	54.00	-11.64	29.35	35.94	9.68	32.61	371	221	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																															
1	5439.75	42.36	54.00	-11.64	29.35	35.94	9.68	32.61	371	221	AVERAGE																											



Mode	7																																																																																																	
	Harmonic																																																																																																	
	U-NII-1_5.15-5.25_802.11ac VHT40_CH38_5190MHZ																																																																																																	
ANT	5																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p style="text-align: right;">Date: 2024-04-14</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10380.00</td> <td>47.51</td> <td>68.30</td> <td>-20.79</td> <td>60.33</td> <td>38.75</td> <td>12.08</td> <td>63.65</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15570.00</td> <td>49.09</td> <td>74.00</td> <td>-24.91</td> <td>57.73</td> <td>40.76</td> <td>14.60</td> <td>64.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10380.00	47.51	68.30	-20.79	60.33	38.75	12.08	63.65	---	---	Peak	2	15570.00	49.09	74.00	-24.91	57.73	40.76	14.60	64.00	---	---	Peak	<p style="text-align: right;">Date: 2024-04-14</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10380.00</td> <td>47.50</td> <td>68.30</td> <td>-20.80</td> <td>60.32</td> <td>38.75</td> <td>12.08</td> <td>63.65</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15570.00</td> <td>50.27</td> <td>74.00</td> <td>-23.73</td> <td>58.91</td> <td>40.76</td> <td>14.60</td> <td>64.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10380.00	47.50	68.30	-20.80	60.32	38.75	12.08	63.65	---	---	Peak	2	15570.00	50.27	74.00	-23.73	58.91	40.76	14.60	64.00	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10380.00	47.51	68.30	-20.79	60.33	38.75	12.08	63.65	---	---	Peak																																																																																							
2	15570.00	49.09	74.00	-24.91	57.73	40.76	14.60	64.00	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10380.00	47.50	68.30	-20.80	60.32	38.75	12.08	63.65	---	---	Peak																																																																																							
2	15570.00	50.27	74.00	-23.73	58.91	40.76	14.60	64.00	---	---	Peak																																																																																							



Mode	8																																																																									
	Band Edge - L																																																																									
	U-NII-1_5.15-5.25_802.11ac VHT40_CH46_5230MHz																																																																									
ANT	5																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.96</td> <td>57.49</td> <td>74.00</td> <td>-16.51</td> <td>45.51</td> <td>36.11</td> <td>8.54</td> <td>32.67</td> <td>110</td> <td>117</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5149.96	57.49	74.00	-16.51	45.51	36.11	8.54	32.67	110	117	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>103.54</td> <td>-----</td> <td>-----</td> <td>91.39</td> <td>36.06</td> <td>8.74</td> <td>32.65</td> <td>110</td> <td>117</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5230.00	103.54	-----	-----	91.39	36.06	8.74	32.65	110	117	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5149.96	57.49	74.00	-16.51	45.51	36.11	8.54	32.67	110	117	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5230.00	103.54	-----	-----	91.39	36.06	8.74	32.65	110	117	PEAK																																																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.04</td> <td>48.46</td> <td>54.00</td> <td>-5.54</td> <td>36.49</td> <td>36.11</td> <td>8.53</td> <td>32.67</td> <td>110</td> <td>117</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5149.04	48.46	54.00	-5.54	36.49	36.11	8.53	32.67	110	117	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>97.28</td> <td>-----</td> <td>-----</td> <td>85.10</td> <td>36.06</td> <td>8.77</td> <td>32.65</td> <td>110</td> <td>117</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5230.00	97.28	-----	-----	85.10	36.06	8.77	32.65	110	117	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5149.04	48.46	54.00	-5.54	36.49	36.11	8.53	32.67	110	117	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5230.00	97.28	-----	-----	85.10	36.06	8.77	32.65	110	117	AVERAGE																																																															



Mode	8																																									
	Band Edge - R																																									
	U-NII-1_5.15-5.25_802.11ac VHT40_CH46_5230MHz																																									
ANT	5																																									
Pol.	Horizontal	Fundamental																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5387.32</td> <td>50.81</td> <td>74.00</td> <td>-23.19</td> <td>37.90</td> <td>35.97</td> <td>9.56</td> <td>32.62</td> <td>110</td> <td>117 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5387.32	50.81	74.00	-23.19	37.90	35.97	9.56	32.62	110	117 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	APos	TPos	Remark																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1	5387.32	50.81	74.00	-23.19	37.90	35.97	9.56	32.62	110	117 PEAK																																
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5454.71</td> <td>42.76</td> <td>54.00</td> <td>-11.24</td> <td>29.76</td> <td>35.93</td> <td>9.68</td> <td>32.61</td> <td>110</td> <td>117 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5454.71	42.76	54.00	-11.24	29.76	35.93	9.68	32.61	110	117 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	APos	TPos	Remark																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1	5454.71	42.76	54.00	-11.24	29.76	35.93	9.68	32.61	110	117 AVERAGE																																



Mode	8																																																																									
	Band Edge - L																																																																									
	U-NII-1_5.15-5.25_802.11ac VHT40_CH46_5230MHz																																																																									
ANT	5																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<p style="text-align: right;">Date: 2024-04-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.58</td> <td>53.60</td> <td>74.00</td> <td>-20.40</td> <td>41.63</td> <td>36.11</td> <td>8.53</td> <td>32.67</td> <td>371</td> <td>221</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5148.58	53.60	74.00	-20.40	41.63	36.11	8.53	32.67	371	221	PEAK	<p style="text-align: right;">Date: 2024-04-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>89.04</td> <td>-----</td> <td>-----</td> <td>76.80</td> <td>36.05</td> <td>8.84</td> <td>32.65</td> <td>371</td> <td>221</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5230.00	89.04	-----	-----	76.80	36.05	8.84	32.65	371	221	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5148.58	53.60	74.00	-20.40	41.63	36.11	8.53	32.67	371	221	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5230.00	89.04	-----	-----	76.80	36.05	8.84	32.65	371	221	PEAK																																																															
Avg	<p style="text-align: right;">Date: 2024-04-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.96</td> <td>44.56</td> <td>54.00</td> <td>-9.44</td> <td>32.58</td> <td>36.11</td> <td>8.54</td> <td>32.67</td> <td>371</td> <td>221</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5149.96	44.56	54.00	-9.44	32.58	36.11	8.54	32.67	371	221	AVERAGE	<p style="text-align: right;">Date: 2024-04-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>82.09</td> <td>-----</td> <td>-----</td> <td>69.85</td> <td>36.05</td> <td>8.84</td> <td>32.65</td> <td>371</td> <td>221</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5230.00	82.09	-----	-----	69.85	36.05	8.84	32.65	371	221	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5149.96	44.56	54.00	-9.44	32.58	36.11	8.54	32.67	371	221	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5230.00	82.09	-----	-----	69.85	36.05	8.84	32.65	371	221	AVERAGE																																																															





Mode	8																																						
	Band Edge - R																																						
	U-NII-1_5.15-5.25_802.11ac VHT40_CH46_5230MHz																																						
ANT	5																																						
Pol.	Vertical	Fundamental																																					
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5367.31</td> <td>51.14</td> <td>74.00</td> <td>-22.86</td> <td>38.34</td> <td>35.98</td> <td>9.45</td> <td>32.63</td> <td>371</td> <td>221</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5367.31	51.14	74.00	-22.86	38.34	35.98	9.45	32.63	371	221	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																
1	5367.31	51.14	74.00	-22.86	38.34	35.98	9.45	32.63	371	221	PEAK																												
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5456.78</td> <td>42.14</td> <td>54.00</td> <td>-11.86</td> <td>29.13</td> <td>35.93</td> <td>9.69</td> <td>32.61</td> <td>371</td> <td>221</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5456.78	42.14	54.00	-11.86	29.13	35.93	9.69	32.61	371	221	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																
1	5456.78	42.14	54.00	-11.86	29.13	35.93	9.69	32.61	371	221	AVERAGE																												



Mode	8																																																																																																	
	Harmonic																																																																																																	
	U-NII-1_5.15-5.25_802.11ac VHT40_CH46_5230MHz																																																																																																	
ANT	5																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p>Date: 2024-04-14</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10444.50</td> <td>48.40</td> <td>68.30</td> <td>-19.90</td> <td>61.13</td> <td>38.78</td> <td>12.12</td> <td>63.63</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15688.50</td> <td>50.11</td> <td>74.00</td> <td>-23.89</td> <td>58.65</td> <td>40.85</td> <td>14.65</td> <td>64.04</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10444.50	48.40	68.30	-19.90	61.13	38.78	12.12	63.63	---	---	Peak	2	15688.50	50.11	74.00	-23.89	58.65	40.85	14.65	64.04	---	---	Peak	<p>Date: 2024-04-14</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10460.00</td> <td>49.90</td> <td>68.30</td> <td>-18.40</td> <td>62.61</td> <td>38.78</td> <td>12.13</td> <td>63.62</td> <td>100</td> <td>288</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15690.00</td> <td>49.47</td> <td>74.00</td> <td>-24.53</td> <td>58.01</td> <td>40.85</td> <td>14.65</td> <td>64.04</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10460.00	49.90	68.30	-18.40	62.61	38.78	12.13	63.62	100	288	Peak	2	15690.00	49.47	74.00	-24.53	58.01	40.85	14.65	64.04	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10444.50	48.40	68.30	-19.90	61.13	38.78	12.12	63.63	---	---	Peak																																																																																							
2	15688.50	50.11	74.00	-23.89	58.65	40.85	14.65	64.04	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10460.00	49.90	68.30	-18.40	62.61	38.78	12.13	63.62	100	288	Peak																																																																																							
2	15690.00	49.47	74.00	-24.53	58.01	40.85	14.65	64.04	---	---	Peak																																																																																							



Mode	9																																																																									
	Band Edge - L																																																																									
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																																																									
ANT	5																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<p style="text-align: right;">Date: 2024-04-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5135.45</td> <td>56.08</td> <td>74.00</td> <td>-17.92</td> <td>44.12</td> <td>36.12</td> <td>8.51</td> <td>32.67</td> <td>100</td> <td>121</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5135.45	56.08	74.00	-17.92	44.12	36.12	8.51	32.67	100	121	PEAK	<p style="text-align: right;">Date: 2024-04-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>99.13</td> <td>-----</td> <td>-----</td> <td>87.07</td> <td>36.07</td> <td>8.65</td> <td>32.66</td> <td>100</td> <td>121</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5210.00	99.13	-----	-----	87.07	36.07	8.65	32.66	100	121	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5135.45	56.08	74.00	-17.92	44.12	36.12	8.51	32.67	100	121	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5210.00	99.13	-----	-----	87.07	36.07	8.65	32.66	100	121	PEAK																																																															
Avg	<p style="text-align: right;">Date: 2024-04-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5145.53</td> <td>48.13</td> <td>54.00</td> <td>-5.87</td> <td>36.16</td> <td>36.11</td> <td>8.53</td> <td>32.67</td> <td>100</td> <td>121</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5145.53	48.13	54.00	-5.87	36.16	36.11	8.53	32.67	100	121	AVERAGE	<p style="text-align: right;">Date: 2024-04-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>92.62</td> <td>-----</td> <td>-----</td> <td>80.53</td> <td>36.07</td> <td>8.68</td> <td>32.66</td> <td>100</td> <td>121</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5210.00	92.62	-----	-----	80.53	36.07	8.68	32.66	100	121	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5145.53	48.13	54.00	-5.87	36.16	36.11	8.53	32.67	100	121	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5210.00	92.62	-----	-----	80.53	36.07	8.68	32.66	100	121	AVERAGE																																																															



Mode	9																																									
	Band Edge - R																																									
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																									
ANT	5																																									
Pol.	Horizontal	Fundamental																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5458.50</td> <td>51.77</td> <td>74.00</td> <td>-22.23</td> <td>38.77</td> <td>35.92</td> <td>9.69</td> <td>32.61</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>100</td> <td>121 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5458.50	51.77	74.00	-22.23	38.77	35.92	9.69	32.61							100	121 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																			
1 5458.50	51.77	74.00	-22.23	38.77	35.92	9.69	32.61																																			
						100	121 PEAK																																			
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5379.25</td> <td>42.41</td> <td>54.00</td> <td>-11.59</td> <td>29.54</td> <td>35.97</td> <td>9.52</td> <td>32.62</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>100</td> <td>121 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5379.25	42.41	54.00	-11.59	29.54	35.97	9.52	32.62							100	121 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																			
1 5379.25	42.41	54.00	-11.59	29.54	35.97	9.52	32.62																																			
						100	121 AVERAGE																																			



Mode	9																																																																									
	Band Edge - L																																																																									
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																																																									
ANT	5																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<p style="text-align: right;">Date: 2024-04-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5124.74</td> <td>52.91</td> <td>74.00</td> <td>-21.09</td> <td>40.97</td> <td>36.13</td> <td>8.49</td> <td>32.68</td> <td>398</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5124.74	52.91	74.00	-21.09	40.97	36.13	8.49	32.68	398	360	PEAK	<p style="text-align: right;">Date: 2024-04-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>88.82</td> <td>-----</td> <td>-----</td> <td>76.58</td> <td>36.05</td> <td>8.84</td> <td>32.65</td> <td>398</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5210.00	88.82	-----	-----	76.58	36.05	8.84	32.65	398	360	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5124.74	52.91	74.00	-21.09	40.97	36.13	8.49	32.68	398	360	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5210.00	88.82	-----	-----	76.58	36.05	8.84	32.65	398	360	PEAK																																																															
Avg	<p style="text-align: right;">Date: 2024-04-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5140.91</td> <td>44.01</td> <td>54.00</td> <td>-9.99</td> <td>32.04</td> <td>36.12</td> <td>8.52</td> <td>32.67</td> <td>398</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5140.91	44.01	54.00	-9.99	32.04	36.12	8.52	32.67	398	360	AVERAGE	<p style="text-align: right;">Date: 2024-04-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>82.53</td> <td>-----</td> <td>-----</td> <td>70.29</td> <td>36.05</td> <td>8.84</td> <td>32.65</td> <td>398</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5210.00	82.53	-----	-----	70.29	36.05	8.84	32.65	398	360	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5140.91	44.01	54.00	-9.99	32.04	36.12	8.52	32.67	398	360	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5210.00	82.53	-----	-----	70.29	36.05	8.84	32.65	398	360	AVERAGE																																																															



Mode	9																																									
	Band Edge - R																																									
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																									
ANT	5																																									
Pol.	Vertical	Fundamental																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5448.00</td> <td>51.18</td> <td>74.00</td> <td>-22.82</td> <td>38.18</td> <td>35.93</td> <td>9.68</td> <td>32.61</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>398</td> <td>360 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5448.00	51.18	74.00	-22.82	38.18	35.93	9.68	32.61							398	360 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																			
1 5448.00	51.18	74.00	-22.82	38.18	35.93	9.68	32.61																																			
						398	360 PEAK																																			
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5415.00</td> <td>42.09</td> <td>54.00</td> <td>-11.91</td> <td>29.10</td> <td>35.95</td> <td>9.66</td> <td>32.62</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>398</td> <td>360 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5415.00	42.09	54.00	-11.91	29.10	35.95	9.66	32.62							398	360 AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																			
1 5415.00	42.09	54.00	-11.91	29.10	35.95	9.66	32.62																																			
						398	360 AVERAGE																																			



Mode	9																																																																																																
	Harmonic																																																																																																
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																																																																																
ANT	5																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-04-14</p>	<p>Date: 2024-04-14</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10420.00</td> <td>47.66</td> <td>68.30</td> <td>-20.64</td> <td>60.41</td> <td>38.77</td> <td>12.11</td> <td>63.63</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15630.00</td> <td>49.72</td> <td>74.00</td> <td>-24.28</td> <td>58.32</td> <td>40.80</td> <td>14.62</td> <td>64.02</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10420.00	47.66	68.30	-20.64	60.41	38.77	12.11	63.63	---	---	Peak	2	15630.00	49.72	74.00	-24.28	58.32	40.80	14.62	64.02	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10420.00</td> <td>46.91</td> <td>68.30</td> <td>-21.39</td> <td>59.66</td> <td>38.77</td> <td>12.11</td> <td>63.63</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15630.00</td> <td>49.59</td> <td>74.00</td> <td>-24.41</td> <td>58.19</td> <td>40.80</td> <td>14.62</td> <td>64.02</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10420.00	46.91	68.30	-21.39	59.66	38.77	12.11	63.63	---	---	Peak	2	15630.00	49.59	74.00	-24.41	58.19	40.80	14.62	64.02	---	---
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	10420.00	47.66	68.30	-20.64	60.41	38.77	12.11	63.63	---	---	Peak																																																																																						
2	15630.00	49.72	74.00	-24.28	58.32	40.80	14.62	64.02	---	---	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	10420.00	46.91	68.30	-21.39	59.66	38.77	12.11	63.63	---	---	Peak																																																																																						
2	15630.00	49.59	74.00	-24.41	58.19	40.80	14.62	64.02	---	---	Peak																																																																																						



Mode	10																																																																																															
	Harmonic																																																																																															
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz																																																																																															
ANT	5																																																																																															
Pol.	Horizontal	Vertical																																																																																														
Peak Avg	<p>Date: 2024-04-14</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>46.94</td> <td>68.30</td> <td>-21.36</td> <td>59.55</td> <td>38.81</td> <td>12.18</td> <td>63.60</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15780.00</td> <td>48.76</td> <td>74.00</td> <td>-25.24</td> <td>57.22</td> <td>40.92</td> <td>14.69</td> <td>64.07</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10520.00	46.94	68.30	-21.36	59.55	38.81	12.18	63.60	---	---	Peak	2	15780.00	48.76	74.00	-25.24	57.22	40.92	14.69	64.07	---	---	Peak	<p>Date: 2024-04-14</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>51.03</td> <td>68.30</td> <td>-17.27</td> <td>63.64</td> <td>38.81</td> <td>12.18</td> <td>63.60</td> <td>100</td> <td>281</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15780.00</td> <td>49.49</td> <td>74.00</td> <td>-24.51</td> <td>57.95</td> <td>40.92</td> <td>14.69</td> <td>64.07</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10520.00	51.03	68.30	-17.27	63.64	38.81	12.18	63.60	100	281	Peak	2	15780.00	49.49	74.00	-24.51	57.95	40.92	14.69	64.07	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	10520.00	46.94	68.30	-21.36	59.55	38.81	12.18	63.60	---	---	Peak																																																																																					
2	15780.00	48.76	74.00	-25.24	57.22	40.92	14.69	64.07	---	---	Peak																																																																																					
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	10520.00	51.03	68.30	-17.27	63.64	38.81	12.18	63.60	100	281	Peak																																																																																					
2	15780.00	49.49	74.00	-24.51	57.95	40.92	14.69	64.07	---	---	Peak																																																																																					





Mode	11																																																																																																																								
	Harmonic																																																																																																																								
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz																																																																																																																								
ANT	5																																																																																																																								
Pol.	Horizontal	Vertical																																																																																																																							
Peak Avg																																																																																																																									
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td></td> <td>MHz</td> <td>dBuV/m</td> <td>dBuV/m</td> <td>dB</td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>dB</td> <td>cm</td> <td>deg</td> <td></td> </tr> <tr> <td>1</td> <td>10600.00</td> <td>47.16</td> <td>74.00</td> <td>-26.84</td> <td>59.66</td> <td>38.84</td> <td>12.23</td> <td>63.57</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>48.89</td> <td>74.00</td> <td>-25.11</td> <td>57.23</td> <td>41.02</td> <td>14.75</td> <td>64.11</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	10600.00	47.16	74.00	-26.84	59.66	38.84	12.23	63.57	---	---	Peak	2	15900.00	48.89	74.00	-25.11	57.23	41.02	14.75	64.11	---	---	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td></td> <td>MHz</td> <td>dBuV/m</td> <td>dBuV/m</td> <td>dB</td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>dB</td> <td>cm</td> <td>deg</td> <td></td> </tr> <tr> <td>1</td> <td>10600.00</td> <td>51.14</td> <td>74.00</td> <td>-22.86</td> <td>63.64</td> <td>38.84</td> <td>12.23</td> <td>63.57</td> <td>100</td> <td>286</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>10600.00</td> <td>44.25</td> <td>54.00</td> <td>-9.75</td> <td>56.75</td> <td>38.84</td> <td>12.23</td> <td>63.57</td> <td>100</td> <td>286</td> <td>Average</td> </tr> <tr> <td>3</td> <td>15900.00</td> <td>47.71</td> <td>74.00</td> <td>-26.29</td> <td>56.05</td> <td>41.02</td> <td>14.75</td> <td>64.11</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	10600.00	51.14	74.00	-22.86	63.64	38.84	12.23	63.57	100	286	Peak	2	10600.00	44.25	54.00	-9.75	56.75	38.84	12.23	63.57	100	286	Average	3	15900.00	47.71	74.00	-26.29	56.05	41.02	14.75	64.11	---	---
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	10600.00	47.16	74.00	-26.84	59.66	38.84	12.23	63.57	---	---	Peak																																																																																																														
2	15900.00	48.89	74.00	-25.11	57.23	41.02	14.75	64.11	---	---	Peak																																																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	10600.00	51.14	74.00	-22.86	63.64	38.84	12.23	63.57	100	286	Peak																																																																																																														
2	10600.00	44.25	54.00	-9.75	56.75	38.84	12.23	63.57	100	286	Average																																																																																																														
3	15900.00	47.71	74.00	-26.29	56.05	41.02	14.75	64.11	---	---	Peak																																																																																																														



Mode	12																																																																																	
	Band Edge																																																																																	
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																	
ANT	5																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	<p style="text-align: right;">Date: 2024-04-13</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5355.70</td> <td>59.90</td> <td>74.00</td> <td>-14.10</td> <td>47.15</td> <td>35.99</td> <td>9.39</td> <td>32.63</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>107</td> <td>117 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5355.70	59.90	74.00	-14.10	47.15	35.99	9.39	32.63							107	117 PEAK	<p style="text-align: right;">Date: 2024-04-13</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>107.65</td> <td>74.00</td> <td>33.65</td> <td>95.07</td> <td>36.01</td> <td>9.21</td> <td>32.64</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>107</td> <td>117 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5320.00	107.65	74.00	33.65	95.07	36.01	9.21	32.64							107	117 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																											
1 5355.70	59.90	74.00	-14.10	47.15	35.99	9.39	32.63																																																																											
						107	117 PEAK																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																											
1 5320.00	107.65	74.00	33.65	95.07	36.01	9.21	32.64																																																																											
						107	117 PEAK																																																																											
Avg	<p style="text-align: right;">Date: 2024-04-13</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5350.66</td> <td>49.35</td> <td>54.00</td> <td>-4.65</td> <td>36.62</td> <td>35.99</td> <td>9.37</td> <td>32.63</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>107</td> <td>117 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5350.66	49.35	54.00	-4.65	36.62	35.99	9.37	32.63							107	117 AVERAGE	<p style="text-align: right;">Date: 2024-04-13</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>100.81</td> <td>54.00</td> <td>46.81</td> <td>88.23</td> <td>36.01</td> <td>9.21</td> <td>32.64</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>107</td> <td>117 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5320.00	100.81	54.00	46.81	88.23	36.01	9.21	32.64							107	117 AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																											
1 5350.66	49.35	54.00	-4.65	36.62	35.99	9.37	32.63																																																																											
						107	117 AVERAGE																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																											
1 5320.00	100.81	54.00	46.81	88.23	36.01	9.21	32.64																																																																											
						107	117 AVERAGE																																																																											



Mode	12																																																																							
	Band Edge																																																																							
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																							
ANT	5																																																																							
Pol.	Vertical	Fundamental																																																																						
Peak	<p>Date: 2024-04-13</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5350.10</td> <td>56.07</td> <td>74.00</td> <td>-17.93</td> <td>43.34</td> <td>35.99</td> <td>9.37</td> <td>32.63</td> <td>400</td> <td>155</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5350.10	56.07	74.00	-17.93	43.34	35.99	9.37	32.63	400	155	PEAK	<p>Date: 2024-04-13</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>104.47</td> <td>74.00</td> <td>30.47</td> <td>91.89</td> <td>36.01</td> <td>9.21</td> <td>32.64</td> <td>400</td> <td>155</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5320.00	104.47	74.00	30.47	91.89	36.01	9.21	32.64	400	155	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																	
1 5350.10	56.07	74.00	-17.93	43.34	35.99	9.37	32.63	400	155	PEAK																																																														
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																	
1 5320.00	104.47	74.00	30.47	91.89	36.01	9.21	32.64	400	155	PEAK																																																														
Avg	<p>Date: 2024-04-13</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5350.10</td> <td>45.82</td> <td>54.00</td> <td>-8.18</td> <td>33.09</td> <td>35.99</td> <td>9.37</td> <td>32.63</td> <td>400</td> <td>155</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5350.10	45.82	54.00	-8.18	33.09	35.99	9.37	32.63	400	155	AVERAGE	<p>Date: 2024-04-13</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>97.23</td> <td>54.00</td> <td>43.23</td> <td>84.65</td> <td>36.01</td> <td>9.21</td> <td>32.64</td> <td>400</td> <td>155</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5320.00	97.23	54.00	43.23	84.65	36.01	9.21	32.64	400	155	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																	
1 5350.10	45.82	54.00	-8.18	33.09	35.99	9.37	32.63	400	155	AVERAGE																																																														
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																	
1 5320.00	97.23	54.00	43.23	84.65	36.01	9.21	32.64	400	155	AVERAGE																																																														



Mode	12																																																																																																																				
	Harmonic																																																																																																																				
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																																																				
ANT	5																																																																																																																				
Pol.	Horizontal	Vertical																																																																																																																			
Peak Avg																																																																																																																					
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>46.49</td> <td>74.00</td> <td>-27.51</td> <td>58.92</td> <td>38.86</td> <td>12.26</td> <td>63.55</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>49.83</td> <td>74.00</td> <td>-24.17</td> <td>58.12</td> <td>41.07</td> <td>14.77</td> <td>64.13</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10640.00	46.49	74.00	-27.51	58.92	38.86	12.26	63.55	---	---	Peak	2	15960.00	49.83	74.00	-24.17	58.12	41.07	14.77	64.13	---	---	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>49.91</td> <td>74.00</td> <td>-24.09</td> <td>62.34</td> <td>38.86</td> <td>12.26</td> <td>63.55</td> <td>100</td> <td>286</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>10640.00</td> <td>42.60</td> <td>54.00</td> <td>-11.40</td> <td>55.03</td> <td>38.86</td> <td>12.26</td> <td>63.55</td> <td>100</td> <td>286</td> <td>Average</td> </tr> <tr> <td>3</td> <td>15960.00</td> <td>49.09</td> <td>74.00</td> <td>-24.91</td> <td>57.38</td> <td>41.07</td> <td>14.77</td> <td>64.13</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10640.00	49.91	74.00	-24.09	62.34	38.86	12.26	63.55	100	286	Peak	2	10640.00	42.60	54.00	-11.40	55.03	38.86	12.26	63.55	100	286	Average	3	15960.00	49.09	74.00	-24.91	57.38	41.07	14.77	64.13	---	---
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	10640.00	46.49	74.00	-27.51	58.92	38.86	12.26	63.55	---	---	Peak																																																																																																										
2	15960.00	49.83	74.00	-24.17	58.12	41.07	14.77	64.13	---	---	Peak																																																																																																										
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	10640.00	49.91	74.00	-24.09	62.34	38.86	12.26	63.55	100	286	Peak																																																																																																										
2	10640.00	42.60	54.00	-11.40	55.03	38.86	12.26	63.55	100	286	Average																																																																																																										
3	15960.00	49.09	74.00	-24.91	57.38	41.07	14.77	64.13	---	---	Peak																																																																																																										



Mode	13																																																																																																			
	Harmonic																																																																																																			
	U-NII-2A_5.25-5.35_802.11ac VHT20_CH52_5260MHz																																																																																																			
ANT	5																																																																																																			
Pol.	Horizontal	Vertical																																																																																																		
Peak Avg	<p>Date: 2024-04-14</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>47.48</td> <td>68.30</td> <td>-20.82</td> <td>60.09</td> <td>38.81</td> <td>12.18</td> <td>63.60</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15780.00</td> <td>49.40</td> <td>74.00</td> <td>-24.60</td> <td>57.86</td> <td>40.92</td> <td>14.69</td> <td>64.07</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10520.00	47.48	68.30	-20.82	60.09	38.81	12.18	63.60	---	---	Peak	2	15780.00	49.40	74.00	-24.60	57.86	40.92	14.69	64.07	---	---	Peak	<p>Date: 2024-04-14</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>50.90</td> <td>68.30</td> <td>-17.40</td> <td>63.51</td> <td>38.81</td> <td>12.18</td> <td>63.60</td> <td>100</td> <td>283</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15780.00</td> <td>50.28</td> <td>74.00</td> <td>-23.72</td> <td>58.74</td> <td>40.92</td> <td>14.69</td> <td>64.07</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10520.00	50.90	68.30	-17.40	63.51	38.81	12.18	63.60	100	283	Peak	2	15780.00	50.28	74.00	-23.72	58.74	40.92	14.69	64.07	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																												
1	10520.00	47.48	68.30	-20.82	60.09	38.81	12.18	63.60	---	---	Peak																																																																																									
2	15780.00	49.40	74.00	-24.60	57.86	40.92	14.69	64.07	---	---	Peak																																																																																									
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																												
1	10520.00	50.90	68.30	-17.40	63.51	38.81	12.18	63.60	100	283	Peak																																																																																									
2	15780.00	50.28	74.00	-23.72	58.74	40.92	14.69	64.07	---	---	Peak																																																																																									



Mode	14																																																																																																															
	Harmonic																																																																																																															
	U-NII-2A_5.25-5.35_802.11ac VHT20_CH60_5300MHz																																																																																																															
ANT	5																																																																																																															
Pol.	Horizontal	Vertical																																																																																																														
Peak Avg	<p style="text-align: right;">Date: 2024-04-14</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>47.03</td> <td>74.00</td> <td>-26.97</td> <td>59.53</td> <td>38.84</td> <td>12.23</td> <td>63.57</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>48.51</td> <td>74.00</td> <td>-25.49</td> <td>56.85</td> <td>41.02</td> <td>14.75</td> <td>64.11</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10600.00	47.03	74.00	-26.97	59.53	38.84	12.23	63.57	---	---	Peak	2	15900.00	48.51	74.00	-25.49	56.85	41.02	14.75	64.11	---	---	Peak	<p style="text-align: right;">Date: 2024-04-14</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>51.09</td> <td>74.00</td> <td>-22.91</td> <td>63.59</td> <td>38.84</td> <td>12.23</td> <td>63.57</td> <td>100</td> <td>285</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>10600.00</td> <td>43.88</td> <td>54.00</td> <td>-10.12</td> <td>56.38</td> <td>38.84</td> <td>12.23</td> <td>63.57</td> <td>100</td> <td>285</td> <td>Average</td> </tr> <tr> <td>3</td> <td>15900.00</td> <td>48.16</td> <td>74.00</td> <td>-25.84</td> <td>56.50</td> <td>41.02</td> <td>14.75</td> <td>64.11</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10600.00	51.09	74.00	-22.91	63.59	38.84	12.23	63.57	100	285	Peak	2	10600.00	43.88	54.00	-10.12	56.38	38.84	12.23	63.57	100	285	Average	3	15900.00	48.16	74.00	-25.84	56.50	41.02	14.75	64.11	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																								
1	10600.00	47.03	74.00	-26.97	59.53	38.84	12.23	63.57	---	---	Peak																																																																																																					
2	15900.00	48.51	74.00	-25.49	56.85	41.02	14.75	64.11	---	---	Peak																																																																																																					
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																								
1	10600.00	51.09	74.00	-22.91	63.59	38.84	12.23	63.57	100	285	Peak																																																																																																					
2	10600.00	43.88	54.00	-10.12	56.38	38.84	12.23	63.57	100	285	Average																																																																																																					
3	15900.00	48.16	74.00	-25.84	56.50	41.02	14.75	64.11	---	---	Peak																																																																																																					



Mode	15																																																																									
	Band Edge																																																																									
	U-NII-2A_5.25-5.35_802.11ac VHT20_CH64_5320MHz																																																																									
ANT	5																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<p>Date: 2024-04-13</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.24</td> <td>58.36</td> <td>74.00</td> <td>-15.64</td> <td>45.63</td> <td>35.99</td> <td>9.37</td> <td>32.63</td> <td>100</td> <td>100</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5350.24	58.36	74.00	-15.64	45.63	35.99	9.37	32.63	100	100	PEAK	<p>Date: 2024-04-13</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>106.74</td> <td>-----</td> <td>-----</td> <td>94.16</td> <td>36.01</td> <td>9.21</td> <td>32.64</td> <td>100</td> <td>100</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5320.00	106.74	-----	-----	94.16	36.01	9.21	32.64	100	100	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5350.24	58.36	74.00	-15.64	45.63	35.99	9.37	32.63	100	100	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5320.00	106.74	-----	-----	94.16	36.01	9.21	32.64	100	100	PEAK																																																															
Avg	<p>Date: 2024-04-13</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5356.68</td> <td>48.23</td> <td>54.00</td> <td>-5.77</td> <td>35.47</td> <td>35.99</td> <td>9.40</td> <td>32.63</td> <td>100</td> <td>100</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5356.68	48.23	54.00	-5.77	35.47	35.99	9.40	32.63	100	100	AVERAGE	<p>Date: 2024-04-13</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>99.76</td> <td>-----</td> <td>-----</td> <td>87.18</td> <td>36.01</td> <td>9.21</td> <td>32.64</td> <td>100</td> <td>100</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5320.00	99.76	-----	-----	87.18	36.01	9.21	32.64	100	100	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5356.68	48.23	54.00	-5.77	35.47	35.99	9.40	32.63	100	100	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5320.00	99.76	-----	-----	87.18	36.01	9.21	32.64	100	100	AVERAGE																																																															



Mode	15																																																																									
	Band Edge																																																																									
	U-NII-2A_5.25-5.35_802.11ac VHT20_CH64_5320MHz																																																																									
ANT	5																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<p>Date: 2024-04-13</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5362.84</td> <td>54.74</td> <td>74.00</td> <td>-19.26</td> <td>41.96</td> <td>35.98</td> <td>9.43</td> <td>32.63</td> <td>400</td> <td>174</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5362.84	54.74	74.00	-19.26	41.96	35.98	9.43	32.63	400	174	PEAK	<p>Date: 2024-04-13</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>102.76</td> <td>-----</td> <td>-----</td> <td>90.18</td> <td>36.01</td> <td>9.21</td> <td>32.64</td> <td>400</td> <td>174</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5320.00	102.76	-----	-----	90.18	36.01	9.21	32.64	400	174	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5362.84	54.74	74.00	-19.26	41.96	35.98	9.43	32.63	400	174	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5320.00	102.76	-----	-----	90.18	36.01	9.21	32.64	400	174	PEAK																																																															
Avg	<p>Date: 2024-04-13</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.24</td> <td>45.23</td> <td>54.00</td> <td>-8.77</td> <td>32.50</td> <td>35.99</td> <td>9.37</td> <td>32.63</td> <td>400</td> <td>174</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5350.24	45.23	54.00	-8.77	32.50	35.99	9.37	32.63	400	174	AVERAGE	<p>Date: 2024-04-13</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>95.77</td> <td>-----</td> <td>-----</td> <td>83.19</td> <td>36.01</td> <td>9.21</td> <td>32.64</td> <td>400</td> <td>174</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5320.00	95.77	-----	-----	83.19	36.01	9.21	32.64	400	174	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5350.24	45.23	54.00	-8.77	32.50	35.99	9.37	32.63	400	174	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5320.00	95.77	-----	-----	83.19	36.01	9.21	32.64	400	174	AVERAGE																																																															





Mode	15																																																																																																																								
	Harmonic																																																																																																																								
	U-NII-2A_5.25-5.35_802.11ac VHT20_CH64_5320MHz																																																																																																																								
ANT	5																																																																																																																								
Pol.	Horizontal	Vertical																																																																																																																							
Peak Avg																																																																																																																									
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td></td> <td>MHz</td> <td>dBuV/m</td> <td>dBuV/m</td> <td>dB</td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>dB</td> <td>cm</td> <td>deg</td> <td></td> </tr> <tr> <td>1</td> <td>10640.00</td> <td>47.40</td> <td>74.00</td> <td>-26.60</td> <td>59.83</td> <td>38.86</td> <td>12.26</td> <td>63.55</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>48.47</td> <td>74.00</td> <td>-25.53</td> <td>56.76</td> <td>41.07</td> <td>14.77</td> <td>64.13</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	10640.00	47.40	74.00	-26.60	59.83	38.86	12.26	63.55	---	---	Peak	2	15960.00	48.47	74.00	-25.53	56.76	41.07	14.77	64.13	---	---	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td></td> <td>MHz</td> <td>dBuV/m</td> <td>dBuV/m</td> <td>dB</td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>dB</td> <td>cm</td> <td>deg</td> <td></td> </tr> <tr> <td>1</td> <td>10640.00</td> <td>50.33</td> <td>74.00</td> <td>-23.67</td> <td>62.76</td> <td>38.86</td> <td>12.26</td> <td>63.55</td> <td>100</td> <td>288</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>10640.00</td> <td>43.85</td> <td>54.00</td> <td>-10.15</td> <td>56.28</td> <td>38.86</td> <td>12.26</td> <td>63.55</td> <td>100</td> <td>288</td> <td>Average</td> </tr> <tr> <td>3</td> <td>15960.00</td> <td>48.37</td> <td>74.00</td> <td>-25.63</td> <td>56.66</td> <td>41.07</td> <td>14.77</td> <td>64.13</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	10640.00	50.33	74.00	-23.67	62.76	38.86	12.26	63.55	100	288	Peak	2	10640.00	43.85	54.00	-10.15	56.28	38.86	12.26	63.55	100	288	Average	3	15960.00	48.37	74.00	-25.63	56.66	41.07	14.77	64.13	---	---
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	10640.00	47.40	74.00	-26.60	59.83	38.86	12.26	63.55	---	---	Peak																																																																																																														
2	15960.00	48.47	74.00	-25.53	56.76	41.07	14.77	64.13	---	---	Peak																																																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	10640.00	50.33	74.00	-23.67	62.76	38.86	12.26	63.55	100	288	Peak																																																																																																														
2	10640.00	43.85	54.00	-10.15	56.28	38.86	12.26	63.55	100	288	Average																																																																																																														
3	15960.00	48.37	74.00	-25.63	56.66	41.07	14.77	64.13	---	---	Peak																																																																																																														



Mode	16																																																																					
	Band Edge - L																																																																					
	U-NII-2A_5.25-5.35_802.11ac VHT40_CH54_5270MHz																																																																					
ANT	5																																																																					
Pol.	Horizontal	Fundamental																																																																				
Peak	<p>Date: 2024-04-13</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5000.54</td> <td>52.10</td> <td>74.00</td> <td>-21.90</td> <td>40.26</td> <td>36.20</td> <td>8.34</td> <td>32.70</td> <td>121</td> <td>120 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5000.54	52.10	74.00	-21.90	40.26	36.20	8.34	32.70	121	120 PEAK	<p>Date: 2024-04-13</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5270.00</td> <td>104.13</td> <td>-----</td> <td>-----</td> <td>91.78</td> <td>36.04</td> <td>8.96</td> <td>32.65</td> <td>121</td> <td>120 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5270.00	104.13	-----	-----	91.78	36.04	8.96	32.65	121	120 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																														
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																															
1 5000.54	52.10	74.00	-21.90	40.26	36.20	8.34	32.70	121	120 PEAK																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																															
1 5270.00	104.13	-----	-----	91.78	36.04	8.96	32.65	121	120 PEAK																																																													
Avg	<p>Date: 2024-04-13</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5149.58</td> <td>43.63</td> <td>54.00</td> <td>-10.37</td> <td>31.66</td> <td>36.11</td> <td>8.53</td> <td>32.67</td> <td>121</td> <td>120 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5149.58	43.63	54.00	-10.37	31.66	36.11	8.53	32.67	121	120 AVERAGE	<p>Date: 2024-04-13</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5270.00</td> <td>97.45</td> <td>-----</td> <td>-----</td> <td>85.13</td> <td>36.04</td> <td>8.93</td> <td>32.65</td> <td>121</td> <td>120 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5270.00	97.45	-----	-----	85.13	36.04	8.93	32.65	121	120 AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																															
1 5149.58	43.63	54.00	-10.37	31.66	36.11	8.53	32.67	121	120 AVERAGE																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																															
1 5270.00	97.45	-----	-----	85.13	36.04	8.93	32.65	121	120 AVERAGE																																																													



Mode	16																																					
	Band Edge - R																																					
	U-NII-2A_5.25-5.35_802.11ac VHT40_CH54_5270MHz																																					
ANT	5																																					
Pol.	Horizontal	Fundamental																																				
Peak	<p>Date: 2024-04-13</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5352.65</td> <td>55.31</td> <td>74.00</td> <td>-18.69</td> <td>42.57</td> <td>35.99</td> <td>9.38</td> <td>32.63</td> <td>121</td> <td>120</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5352.65	55.31	74.00	-18.69	42.57	35.99	9.38	32.63	121	120	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5352.65	55.31	74.00	-18.69	42.57	35.99	9.38	32.63	121	120	PEAK																											
Avg	<p>Date: 2024-04-13</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5352.65</td> <td>45.77</td> <td>54.00</td> <td>-8.23</td> <td>33.03</td> <td>35.99</td> <td>9.38</td> <td>32.63</td> <td>121</td> <td>120</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5352.65	45.77	54.00	-8.23	33.03	35.99	9.38	32.63	121	120	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5352.65	45.77	54.00	-8.23	33.03	35.99	9.38	32.63	121	120	AVERAGE																											