



# FCC RF Test Report

**APPLICANT** : Motorola Mobility LLC  
**EQUIPMENT** : Mobile Cellular Phone  
**BRAND NAME** : Motorola  
**MODEL NAME** : XT2451-3  
**FCC ID** : IHDT56AP8  
**STANDARD** : 47 CFR Part 2, 27 Subpart O (3700-3980MHz)  
**CLASSIFICATION** : PCS Licensed Transmitter Held to Ear (PCE)  
**TEST DATE(S)** : Apr. 28, 2024 ~ Apr. 30, 2024

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



**Sporton International Inc. (ShenZhen)**

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055**

**People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY... 3
SUMMARY OF TEST RESULT ... 4
1 GENERAL DESCRIPTION ... 5
1.1 Applicant ... 5
1.2 Manufacturer ... 5
1.3 Product Feature of Equipment Under Test ... 5
1.4 Product Specification of Equipment Under Test ... 5
1.5 Modification of EUT ... 6
1.6 Specification of Accessory ... 6
1.7 Maximum EIRP and Emission Designator ... 7
1.8 Testing Location ... 8
1.9 Test Software ... 8
1.10 Applicable Standards ... 8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ... 9
2.1 Test Mode ... 9
2.2 Connection Diagram of Test System ... 10
2.3 Support Unit used in test configuration and system ... 10
2.4 Measurement Results Explanation Example ... 10
2.5 Frequency List of Low/Middle/High Channels ... 11
3 CONDUCTED TEST ITEMS ... 13
3.1 Measuring Instruments ... 13
3.2 Test Setup ... 13
3.3 Test Result of Conducted Test ... 13
3.4 Conducted Output Power and EIRP ... 14
3.5 Peak-to-Average Ratio ... 15
3.6 Occupied Bandwidth ... 16
3.7 Conducted Band Edge ... 17
3.8 Conducted Spurious Emission ... 18
3.9 Frequency Stability ... 19
4 RADIATED TEST ITEMS ... 20
4.1 Measuring Instruments ... 20
4.2 Test Setup ... 20
4.3 Test Result of Radiated Test ... 21
4.4 Radiated Spurious Emission ... 22
5 LIST OF MEASURING EQUIPMENT ... 23
6 MEASUREMENT UNCERTAINTY ... 24
APPENDIX A. TEST RESULTS OF CONDUCTED TEST
APPENDIX B. TEST RESULTS OF RADIATED TEST
APPENDIX C. TEST SETUP PHOTOGRAPHS



## REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG420703-01E	Rev. 01	Initial issue of report	Apr. 30, 2024



### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§27.50(j)(3)	Equivalent Isotropic Radiated Power (5G NR n77, n78)	EIRP < 1Watt		
3.5	§27.50(j)(4)	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §27.53(l)(2)	Conducted Band Edge Measurement (5G NR n77, n78)	< 43+10log10(P[Watts])	PASS	-
3.8	§2.1051 §27.53(l)(2)	Conducted Spurious Emission (5G NR n77, n78)	< 43+10log10(P[Watts])	PASS	-
3.9	§27.54	Frequency Stability Temperature & Voltage	Within Authorized Band	PASS	-
4.4	§2.1053 §27.53(l)(2)	Radiated Spurious Emission (5G NR n77, n78)	< 43+10log <sub>10</sub> (P[Watts])	PASS	Under limit 37.95 dB at 15165.80 MHz

**Conformity Assessment Condition:**

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



# 1 General Description

## 1.1 Applicant

Motorola Mobility LLC  
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.2 Manufacturer

Motorola Mobility LLC  
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2451-3
FCC ID	IHDT56AP8
IMEI Code	Conducted: 355473450019278/355473450019286 Radiation: 355473450020474/355473450020482
HW Version	DVT2
SW Version	U3UX34.16
EUT Stage	Identical Prototype

## 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency	5G NR n77: 3700 MHz ~ 3980 MHz 5G NR n78: 3700 MHz ~ 3800 MHz
SCS	30kHz
Bandwidth	n77/n78: 10 / 15 / 20 / 25 / 30 / 40 / 50 / 60 / 70 / 80 / 90 / 100MHz
Antenna Gain	<Ant. 3> 5G NR n77: -2.9 dBi 5G NR n78: -2.9 dBi <Ant. 4> 5G NR n77: -3.7 dBi 5G NR n78: -3.7 dBi <Ant. 6> 5G NR n77: -2.2 dBi 5G NR n78: -2.2 dBi <Ant. 8> 5G NR n77: -4.2 dBi 5G NR n78: -4.2 dBi
Type of Modulation	5G NR: DFT-s-OFDM (PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM) CP-OFDM (QPSK / 16QAM / 64QAM / 256QAM)

Remark:



1. The maximum EIRP is calculated from max output power and max antenna gain, only the maximum EIRP is shown in the report, 5G NR n77/n78 UL\_MIMO for Ant(3+6).
2. The device supports n77(1T4R) SRS resources on Antenna 3/4/6/8.
3. 5G NR n77 support UL MIMO mode for Ant(4+8) / Ant(4+6) / Ant(3+8) / Ant(3+6), only the worst test data of Ant(4+8) is shown in the report according to the maximum power.
4. The device supports HPUE(PC2) for n77/78 UL MIMO mode.
5. 5G NR n77/78 UL\_MIMO mode only supports CP-OFDM Modulation, the MIMO mode is completely uncorrelated, so the directional gain is selected the maximum gain among all antennas.
6. For UL MIMO mode, the conducted BE/Spurious are tested at single antenna port and add  $10 \cdot \log(N_{ANT})$  according to KDB 662911 D01.
7. 5G NR n77/n78 support SA and NSA mode..
8. The EN-DC mode combination could be referred to the product spec.
9. Only the test data for 5G NR n77/78 UL MIMO are showed in this report, other test results could be referred to the spot check report 420703-01.

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Specification of Accessory

Specification of Accessory				
AC Adapter 1(US)	Brand Name	Motorola (Chenyang)	Model Name	MC-681N
AC Adapter 1(EU)	Brand Name	Motorola (Chenyang)	Model Name	MC-682N
AC Adapter 1(UK)	Brand Name	Motorola (Chenyang)	Model Name	MC-683N
AC Adapter 1(AU)	Brand Name	Motorola (Chenyang)	Model Name	MC-685N
AC Adapter 1(AR)	Brand Name	Motorola (Chenyang)	Model Name	MC-686N
AC Adapter 1(BR)	Brand Name	Motorola (Chenyang)	Model Name	MC-687N
AC Adapter 1(CHILE)	Brand Name	Motorola (Chenyang)	Model Name	MC-689N
AC Adapter 1(KR)	Brand Name	Motorola (Chenyang)	Model Name	MC-680N
AC Adapter 2(US)	Brand Name	Motorola (Acbel)	Model Name	MC-681N
AC Adapter 2(EU)	Brand Name	Motorola (Acbel)	Model Name	MC-682N
AC Adapter 2(UK)	Brand Name	Motorola (Acbel)	Model Name	MC-683N
AC Adapter 2(AU)	Brand Name	Motorola (Acbel)	Model Name	MC-685N
AC Adapter 2(AR)	Brand Name	Motorola (Acbel)	Model Name	MC-686N
AC Adapter 2(BR)	Brand Name	Motorola (Acbel)	Model Name	MC-687N
AC Adapter 3(IN)	Brand Name	Motorola (Acbel)	Model Name	MC-684N
Battery 1	Brand Name	Motorola(ATL)	Model Name	QR10
Battery 2	Brand Name	Motorola(ATL)	Model Name	QR30
USB Cable 1	Brand Name	Motorola(SAIBAO)	Model Name	SC18D71644
USB Cable 2	Brand Name	Motorola(Luxshare)	Model Name	SC18E08104
Wireless Earphones	Brand Name	Motorola	Model Name	XT2441-1



### 1.7 Maximum EIRP and Emission Designator

5G NR n77 UL MIMO		QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	3705.00 ~ 3975.00	0.2541	8M61G7D	0.2198	8M60W7D
15	3705.52 ~ 3972.48	0.2547	13M6G7D	0.2188	13M6W7D
20	3710.01 ~ 3969.99	0.2500	18M2G7D	0.2158	18M3W7D
25	3712.50 ~ 3967.50	0.2523	23M3G7D	0.2099	23M3W7D
30	3715.02 ~ 3964.98	0.2541	27M9G7D	0.2234	28M0W7D
40	3720.00 ~ 3960.00	0.2512	37M9G7D	0.2153	37M9W7D
50	3725.01 ~ 3954.99	0.2500	47M4G7D	0.2259	47M5W7D
60	3730.02 ~ 3949.98	0.2472	57M8G7D	0.2143	57M9W7D
70	3735.00 ~ 3945.00	0.2518	67M4G7D	0.2173	67M7W7D
80	3740.01 ~ 3939.99	0.2506	77M5G7D	0.2193	77M6W7D
90	3745.02 ~ 3934.98	0.2535	87M5G7D	0.2193	87M5W7D
100	3750.00 ~ 3930.00	0.2564	97M6G7D	0.2223	97M6W7D

5G NR n78 UL MIMO		QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	3705.00 ~ 3795.00	0.2410	8M61G7D	0.2094	8M60W7D
15	3707.52 ~ 3792.48	0.2449	13M6G7D	0.2123	13M6W7D
20	3710.01 ~ 3789.99	0.2438	18M2G7D	0.2056	18M3W7D
25	3712.50 ~ 3787.50	0.2427	23M3G7D	0.2104	23M3W7D
30	3715.02 ~ 3784.98	0.2466	27M9G7D	0.2163	28M0W7D
40	3720.00 ~ 3780.00	0.2438	37M9G7D	0.2089	37M9W7D
50	3725.01 ~ 3774.99	0.2466	47M4G7D	0.2158	47M5W7D
60	3730.02 ~ 3769.98	0.2421	57M8G7D	0.2028	57M9W7D
70	3735.00 ~ 3765.00	0.2466	67M4G7D	0.2109	67M7W7D
80	3740.01 ~ 3759.99	0.2443	77M5G7D	0.2113	77M6W7D
90	3745.02 ~ 3754.98	0.2466	87M5G7D	0.2109	87M5W7D
100	3750.00 ~ 3750.00	0.2477	97M6G7D	0.2133	97M6W7D

Note:

- 5G NR Band n77 overlaps the entire frequency range of Band n78, and n77 power > n78 power, therefore



the conducted test results of n77 provided in this report cover n78.

2. All modulations have been tested, and only the worst test results of PSK & QAM are shown in the report.

### 1.8 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

<b>Test Firm</b>	Sporton International Inc. (ShenZhen)		
<b>Test Site Location</b>	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	TH01-SZ	CN1256	421272

<b>Test Firm</b>	Sporton International Inc. (ShenZhen)		
<b>Test Site Location</b>	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	03CH04-SZ	CN1256	421272

### 1.9 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH04-SZ	AUDIX	E3	6.2009-8-24

### 1.10 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 27
- ANSI C63.26-2015
- FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01

**Remark:**

All test items were verified and recorded according to the standards and without any deviation during the test.



## 2 Test Configuration of Equipment Under Test




### 2.1 Test Mode

Antenna port conducted and radiated test items are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.

The EUT is a folding phone, pretest the open status and closed status, only the worst status perform final test and record in the report. For the accessories, pretest standalone mode / Earphone mode / Adapter mode / Wireless charging mode, only the worst status perform final test and record in the report.


For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.

Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			

Test Items	5G NR	Bandwidth (MHz)										Modulation				RB #		Test Channel				
		10	15	20	25	30	40	50	60	70~90	100	QPSK	16QAM	64QAM	256 QAM	1	Full	L	M	H		
Max. Output Power	n77	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v		
	n78	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v		
Peak-to-Average Ratio	n77			v								v					v		v			
26dB and 99% Bandwidth	n77	v	v	v	v	v	v	v	v	v	v	v	v	v	v		v		v			
Conducted Band Edge	n77	v						v			v	v				v	v	v		v		
Conducted Spurious Emission	n77	v						v			v	v				v		v	v	v		
Frequency Stability	n77			v								v					v		v			
E.I.R.P	n77	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v		
	n78	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v		
Radiated Spurious Emission	n77	Worst Case																			v	
Note	<ol style="list-style-type: none"> <li>The mark "v" means that this configuration is chosen for testing</li> <li>The mark "-" means that this bandwidth is not supported.</li> <li>The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.</li> <li>Frequency Stability : Normal Voltage = 3.88V; Low Voltage =3.4V; High Voltage =4.53V.</li> </ol>																					

## 2.2 Connection Diagram of Test System

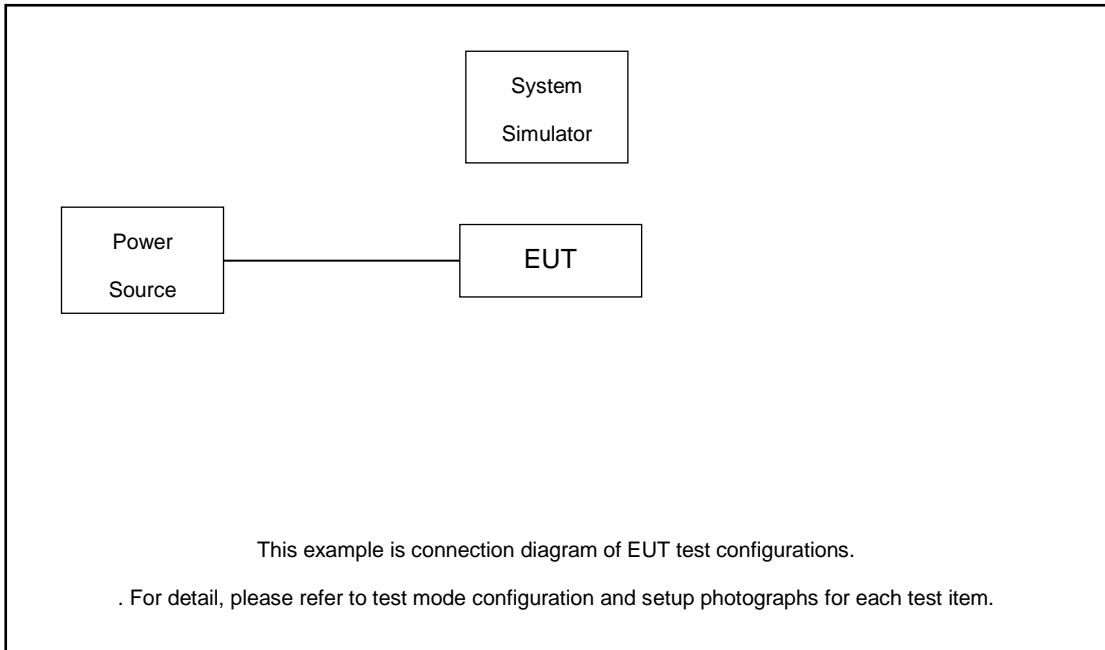

## 2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m

## 2.4 Measurement Results Explanation Example

### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

*Offset = RF cable loss.*

Following shows an offset computation example with cable loss 8.9 dB.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} \\ &= 8.9 \text{ (dB)} \end{aligned}$$



### 2.5 Frequency List of Low/Middle/High Channels

5G n77 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	650000	656000	662000
	Frequency	3750	3840	3930
90	Channel	649668	656000	662332
	Frequency	3745.02	3840	3934.98
80	Channel	649334	656000	662666
	Frequency	3740.01	3840	3939.99
70	Channel	649000	656000	663000
	Frequency	3735	3840	3945
60	Channel	648668	656000	663332
	Frequency	3730.02	3840	3949.98
50	Channel	648334	656000	663666
	Frequency	3725.01	3840	3954.99
40	Channel	648000	656000	664000
	Frequency	3720	3840	3960
30	Channel	647668	656000	664332
	Frequency	3715.02	3840	3964.98
25	Channel	647500	656000	664500
	Frequency	3712.5	3840	3967.5
20	Channel	647334	656000	664666
	Frequency	3710.01	3840	3969.99
15	Channel	647168	656000	664832
	Frequency	3707.52	3840	3972.48
10	Channel	647000	656000	665000
	Frequency	3705	3840	3975



5G n78 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	650000		
	Frequency	3750		
90	Channel	649668	650000	650332
	Frequency	3745.02	3750	3754.98
80	Channel	649334	650000	650666
	Frequency	3740.01	3750	3759.99
70	Channel	649000	650000	651000
	Frequency	3735	3750	3765
60	Channel	648668	650000	651332
	Frequency	3730.02	3750	3769.98
50	Channel	648334	650000	651666
	Frequency	3725.01	3750	3774.99
40	Channel	648000	650000	652000
	Frequency	3720	3750	3780
30	Channel	647668	650000	652332
	Frequency	3715.02	3750	3784.98
25	Channel	647500	650000	652500
	Frequency	3712.5	3750	3787.5
20	Channel	647334	650000	652666
	Frequency	3710.01	3750	3789.99
15	Channel	647168	650000	652832
	Frequency	3707.52	3750	3792.48
10	Channel	647000	650000	653000
	Frequency	3705	3750	3795


### 3 Conducted Test Items

#### 3.1 Measuring Instruments


See list of measuring instruments of this test report.

#### 3.2 Test Setup


##### 3.2.1 Conducted Output Power

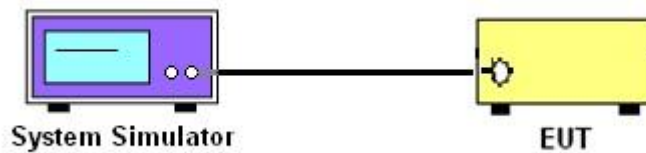

##### 3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

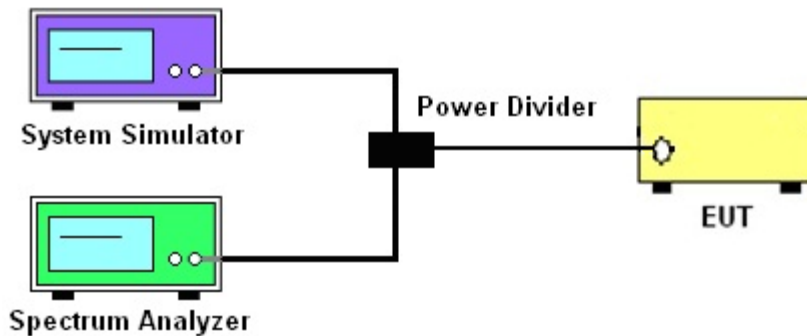

##### 3.2.3 Frequency Stability

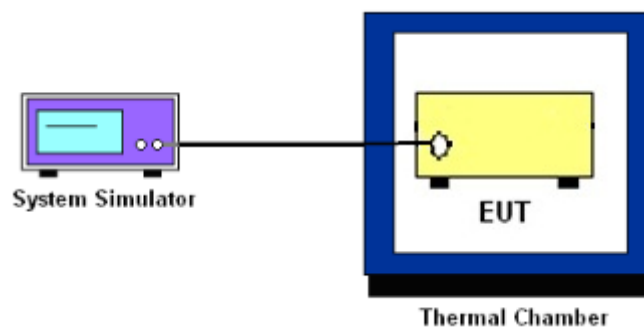

### 3.3 Test Result of Conducted Test

Please refer to Appendix A.



### 3.4 Conducted Output Power and EIRP

#### 3.4.1 Description of the Conducted Output Power Measurement and EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The EIRP of mobile transmitters must not exceed 1 Watts for 5G NR n77, n78.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$ ,  $ERP = EIRP - 2.15$ , where

$P_T$  = transmitter output power in dBm

$G_T$  = gain of the transmitting antenna in dBi

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna in dB

#### 3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.



## **3.5 Peak-to-Average Ratio**

### **3.5.1 Description of the PAR Measurement**

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### **3.5.2 Test Procedures**

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.



## **3.6 Occupied Bandwidth**

### **3.6.1 Description of Occupied Bandwidth Measurement**

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

### **3.6.2 Test Procedures**

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.  
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.





### 3.7 Conducted Band Edge

#### 3.7.1 Description of Conducted Band Edge Measurement

27.53(l)(2)

For mobile operations in the 3700-3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz. Compliance with this paragraph is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be either one percent of the emission bandwidth of the fundamental emission of the transmitter or 350 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.

#### 3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW  $\geq$  1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used or a narrower RBW was used (generally limited to no less than 1% of the OBW) and the measured power was integrated over the full required measurement bandwidth.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

$$\begin{aligned} & \text{The limit line is derived from } 43 + 10\log(P)\text{dB below the transmitter power } P(\text{Watts}) \\ & = P(\text{W}) - [43 + 10\log(P)] \text{ (dB)} \\ & = [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} = -13\text{dBm.} \end{aligned}$$

9. When using the integration method, the starting frequency of the integration shall be centered at one-half of the RBW away from the band edge.



### 3.8 Conducted Spurious Emission

#### 3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.

#### 3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)  
= P(W)- [43 + 10log(P)] (dB)  
= [30 + 10log(P)] (dBm) - [43 + 10log(P)] (dB)  
= -13dBm.



## 3.9 Frequency Stability

### 3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

### 3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  step up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

### 3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at  $20\pm 5^{\circ}\text{C}$  and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


## 4 Radiated Test Items

### 4.1 Measuring Instruments


See list of measuring instruments of this test report.

### 4.2 Test Setup


#### 4.2.1 For radiated test below 30MHz

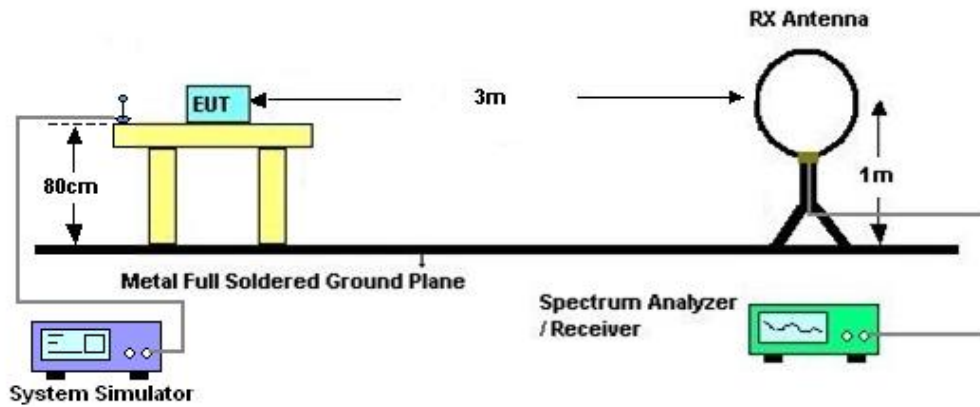

#### 4.2.2 For radiated test from 30MHz to 1GHz

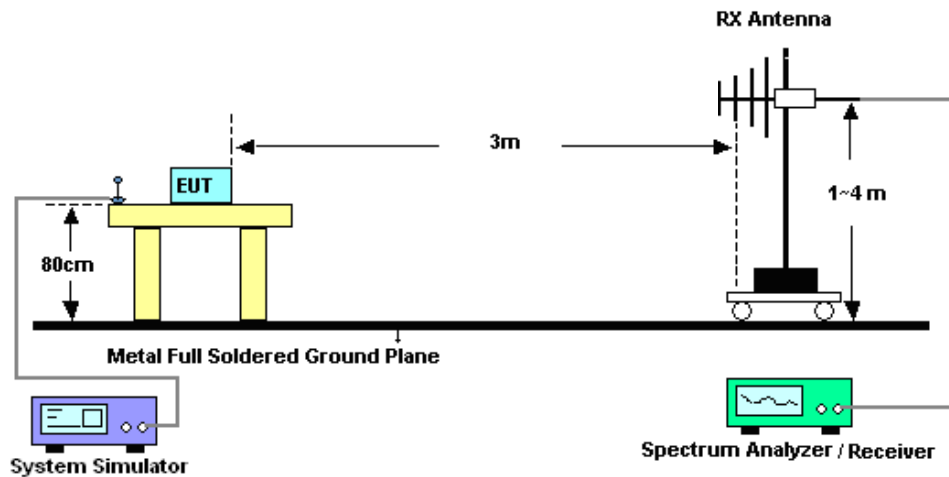

#### 4.2.3 For radiated test above 1GHz

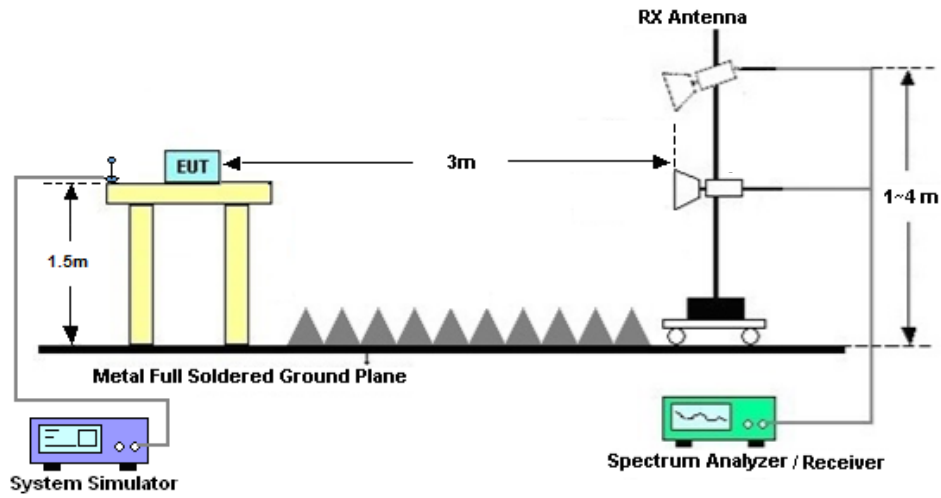

### 4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.



## 4.4 Radiated Spurious Emission

### 4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10.  $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11.  $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)  
=  $P(W) - [43 + 10\log(P)] \text{ (dB)}$   
=  $[30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$   
= -13dBm.



## 5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 07, 2023	Apr. 28, 2024~ Apr. 30, 2024	Jul. 06, 2024	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-04 265	60.06.020.007 7	0.4GHz~26.5GHz	Dec. 25, 2023	Apr. 28, 2024~ Apr. 30, 2024	Dec. 24, 2024	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Jul. 05, 2023	Apr. 28, 2024~ Apr. 30, 2024	Jul. 04, 2024	Conducted (TH01-SZ)
EMI Test Receiver	R&S	ESR7	101404	9kHz~7GHz	Oct. 18, 2023	Apr. 29, 2024	Oct. 17, 2024	Radiation (03CH04-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 07, 2023	Apr. 29, 2024	Jul. 06, 2024	Radiation (03CH04-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jun. 28, 2022	Apr. 29, 2024	Jun. 27, 2024	Radiation (03CH04-SZ)
Bilog Antenna	TeseQ	CBL6111D	41909	30MHz~1GHz	May 14, 2023	Apr. 29, 2024	May 13, 2024	Radiation (03CH04-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1474	1GHz~18GHz	Jul. 07, 2023	Apr. 29, 2024	Jul. 06, 2024	Radiation (03CH04-SZ)
Horn Antenna	SCHWARZBECK	BBHA9170	9170#679	15GHz~40GHz	Jul. 08, 2023	Apr. 29, 2024	Jul. 07, 2024	Radiation (03CH04-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz ~3000MHz	Oct. 18, 2023	Apr. 29, 2024	Oct. 17, 2024	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P-R	1943528	1GHz~18GHz	Oct. 18, 2023	Apr. 29, 2024	Oct. 17, 2024	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	TTA1840-35 -HG	1871923	18GHz~40GHz	Jul. 07, 2023	Apr. 29, 2024	Jul. 06, 2024	Radiation (03CH04-SZ)
Amplifier	Agilent Technologies	83017A	MY57280136	500MHz~26.5GHz	Aug. 21, 2023	Apr. 29, 2024	Aug. 20, 2024	Radiation (03CH04-SZ)
AC Power Source	APC	AFV-S-600B	F119050019	N/A	Oct. 18, 2023	Apr. 29, 2024	Oct. 17, 2024	Radiation (03CH04-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Apr. 29, 2024	NCR	Radiation (03CH04-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Apr. 29, 2024	NCR	Radiation (03CH04-SZ)

NCR: No Calibration Required



## 6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
Peak to Average Ratio	±1.34 dB
Frequency Stability	±1.3 Hz

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8 dB
---	--------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.1 dB
---	--------

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.9 dB
---	--------

----- THE END -----





## Appendix A. Test Results of Conducted Test

Test Engineer :	Khan Zheng	Temperature :	22~23°C
		Relative Humidity :	40~42%

# FR1 N77 MIMO

## Transmitter Conducted Output Power and EIRP, (G<sub>T</sub> - L<sub>C</sub>)=-2.2dB

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	ANT3 Power(dBm)	ANT6 Power(dBm)	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
77	30	10	647000	3705	CP-OFDM QPSK	1@1	23.15	22.84	26.01	23.81	0.2404
77	30	10	647000	3705	CP-OFDM 16 QAM	1@1	22.71	22.12	25.44	23.24	0.2109
77	30	10	656000	3840	CP-OFDM QPSK	1@1	23.56	22.9	26.25	24.05	0.2541
77	30	10	656000	3840	CP-OFDM 16 QAM	1@1	23	22.18	25.62	23.42	0.2198
77	30	10	665000	3975	CP-OFDM QPSK	1@1	23.02	22.65	25.85	23.65	0.2317
77	30	10	665000	3975	CP-OFDM 16 QAM	1@1	22.38	21.81	25.11	22.91	0.1954
77	30	15	647168	3707.52	CP-OFDM QPSK	1@1	23.23	22.87	26.06	23.86	0.2432
77	30	15	647168	3707.52	CP-OFDM 16 QAM	1@1	22.68	22.2	25.46	23.26	0.2118
77	30	15	656000	3840	CP-OFDM QPSK	1@1	23.5	22.99	26.26	24.06	0.2547
77	30	15	656000	3840	CP-OFDM 16 QAM	1@1	22.89	22.26	25.60	23.4	0.2188
77	30	15	664832	3972.48	CP-OFDM QPSK	1@1	23.01	22.61	25.82	23.62	0.2301
77	30	15	664832	3972.48	CP-OFDM 16 QAM	1@1	22.45	21.8	25.15	22.95	0.1972
77	30	20	647334	3710.01	CP-OFDM QPSK	1@1	23.18	22.85	26.03	23.83	0.2415
77	30	20	647334	3710.01	CP-OFDM 16 QAM	1@1	22.7	22.1	25.42	23.22	0.2099
77	30	20	656000	3840	CP-OFDM QPSK	1@1	23.43	22.9	26.18	23.98	0.2500
77	30	20	656000	3840	CP-OFDM 16 QAM	1@1	22.87	22.15	25.54	23.34	0.2158
77	30	20	664666	3969.99	CP-OFDM QPSK	1@1	22.93	22.42	25.69	23.49	0.2234
77	30	20	664666	3969.99	CP-OFDM 16 QAM	1@1	22.29	21.71	25.02	22.82	0.1914
77	30	25	647500	3712.5	CP-OFDM QPSK	1@1	23.26	22.83	26.06	23.86	0.2432
77	30	25	647500	3712.5	CP-OFDM 16 QAM	1@1	22.75	22.03	25.42	23.22	0.2099
77	30	25	656000	3840	CP-OFDM QPSK	1@1	23.51	22.88	26.22	24.02	0.2523
77	30	25	656000	3840	CP-OFDM 16 QAM	1@1	22.36	22.11	25.25	23.05	0.2018
77	30	25	664500	3967.5	CP-OFDM QPSK	1@1	23.03	22.69	25.87	23.67	0.2328
77	30	25	664500	3967.5	CP-OFDM 16 QAM	1@1	22.33	22.02	25.19	22.99	0.1991
77	30	30	647668	3715.02	CP-OFDM QPSK	1@1	23.19	22.84	26.03	23.83	0.2415
77	30	30	647668	3715.02	CP-OFDM 16 QAM	1@1	22.78	22.04	25.44	23.24	0.2109
77	30	30	656000	3840	CP-OFDM QPSK	1@1	23.49	22.97	26.25	24.05	0.2541
77	30	30	656000	3840	CP-OFDM 16 QAM	1@1	23.05	22.27	25.69	23.49	0.2234
77	30	30	664332	3964.98	CP-OFDM QPSK	1@1	23.13	22.6	25.88	23.68	0.2333

77	30	30	664332	3964.98	CP-OFDM 16 QAM	1@1	22.5	21.8	25.17	22.97	0.1982
77	30	40	648000	3720	CP-OFDM QPSK	1@1	23.42	22.94	26.20	24	0.2512
77	30	40	648000	3720	CP-OFDM 16 QAM	1@1	22.83	22.03	25.46	23.26	0.2118
77	30	40	656000	3840	CP-OFDM QPSK	1@1	23.41	22.93	26.19	23.99	0.2506
77	30	40	656000	3840	CP-OFDM 16 QAM	1@1	22.84	22.17	25.53	23.33	0.2153
77	30	40	664000	3960	CP-OFDM QPSK	1@1	22.92	22.42	25.69	23.49	0.2234
77	30	40	664000	3960	CP-OFDM 16 QAM	1@1	22.29	21.63	24.98	22.78	0.1897
77	30	50	648334	3725.01	CP-OFDM QPSK	1@1	23.28	22.83	26.07	23.87	0.2438
77	30	50	648334	3725.01	CP-OFDM 16 QAM	1@1	22.79	22.08	25.46	23.26	0.2118
77	30	50	656000	3840	CP-OFDM QPSK	1@1	23.27	23.07	26.18	23.98	0.2500
77	30	50	656000	3840	CP-OFDM 16 QAM	1@1	23.08	22.34	25.74	23.54	0.2259
77	30	50	663666	3954.99	CP-OFDM QPSK	1@1	23.08	22.69	25.90	23.7	0.2344
77	30	50	663666	3954.99	CP-OFDM 16 QAM	1@1	22.52	21.98	25.27	23.07	0.2028
77	30	60	648668	3730.02	CP-OFDM QPSK	1@1	23.22	22.79	26.02	23.82	0.2410
77	30	60	648668	3730.02	CP-OFDM 16 QAM	1@1	22.65	21.91	25.31	23.11	0.2046
77	30	60	656000	3840	CP-OFDM QPSK	1@1	23.37	22.85	26.13	23.93	0.2472
77	30	60	656000	3840	CP-OFDM 16 QAM	1@1	22.82	22.15	25.51	23.31	0.2143
77	30	60	663332	3949.98	CP-OFDM QPSK	1@1	23.36	22.36	25.90	23.7	0.2344
77	30	60	663332	3949.98	CP-OFDM 16 QAM	1@1	22.64	21.43	25.09	22.89	0.1945
77	30	70	649000	3735	CP-OFDM QPSK	1@1	23.24	22.84	26.05	23.85	0.2427
77	30	70	649000	3735	CP-OFDM 16 QAM	1@1	22.8	22.11	25.48	23.28	0.2128
77	30	70	656000	3840	CP-OFDM QPSK	1@1	23.5	22.88	26.21	24.01	0.2518
77	30	70	656000	3840	CP-OFDM 16 QAM	1@1	22.91	22.17	25.57	23.37	0.2173
77	30	70	663000	3945	CP-OFDM QPSK	1@1	23.29	22.45	25.90	23.7	0.2344
77	30	70	663000	3945	CP-OFDM 16 QAM	1@1	22.69	21.53	25.16	22.96	0.1977
77	30	80	649334	3740.01	CP-OFDM QPSK	1@1	23.27	22.94	26.12	23.92	0.2466
77	30	80	649334	3740.01	CP-OFDM 16 QAM	1@1	22.87	22.18	25.55	23.35	0.2163
77	30	80	656000	3840	CP-OFDM QPSK	1@1	23.46	22.89	26.19	23.99	0.2506
77	30	80	656000	3840	CP-OFDM 16 QAM	1@1	22.94	22.22	25.61	23.41	0.2193
77	30	80	662666	3939.99	CP-OFDM QPSK	1@1	23.29	22.44	25.90	23.7	0.2344
77	30	80	662666	3939.99	CP-OFDM 16 QAM	1@1	22.75	21.59	25.22	23.02	0.2004
77	30	90	649668	3745.02	CP-OFDM QPSK	1@1	23.33	22.89	26.13	23.93	0.2472
77	30	90	649668	3745.02	CP-OFDM 16 QAM	1@1	22.85	22.01	25.46	23.26	0.2118
77	30	90	656000	3840	CP-OFDM QPSK	1@1	23.45	22.99	26.24	24.04	0.2535
77	30	90	656000	3840	CP-OFDM 16 QAM	1@1	23	22.15	25.61	23.41	0.2193

77	30	90	662332	3934.98	CP-OFDM QPSK	1@1	23.47	22.66	26.09	23.89	0.2449
77	30	90	662332	3934.98	CP-OFDM 16 QAM	1@1	22.89	21.81	25.39	23.19	0.2084
77	30	100	650000	3750	CP-OFDM QPSK	137@68	23.28	22.65	25.99	23.79	0.2393
77	30	100	650000	3750	CP-OFDM QPSK	1@1	23.3	22.91	26.12	23.92	0.2466
77	30	100	650000	3750	CP-OFDM QPSK	1@271	23.49	23.06	26.29	24.09	0.2564
77	30	100	650000	3750	CP-OFDM 16 QAM	137@68	22.93	22.28	25.63	23.43	0.2203
77	30	100	650000	3750	CP-OFDM 16 QAM	1@1	22.84	22.17	25.53	23.33	0.2153
77	30	100	650000	3750	CP-OFDM 16 QAM	1@271	23.02	22.22	25.65	23.45	0.2213
77	30	100	650000	3750	CP-OFDM 64 QAM	137@68	21.34	20.64	24.01	21.81	0.1517
77	30	100	650000	3750	CP-OFDM 64 QAM	1@1	21.25	20.55	23.92	21.72	0.1486
77	30	100	650000	3750	CP-OFDM 64 QAM	1@271	21.36	20.54	23.98	21.78	0.1507
77	30	100	650000	3750	CP-OFDM 256 QAM	137@68	18.02	17.93	20.99	18.79	0.0757
77	30	100	650000	3750	CP-OFDM 256 QAM	1@1	18.18	17.8	21.00	18.8	0.0759
77	30	100	650000	3750	CP-OFDM 256 QAM	1@271	18.32	17.73	21.05	18.85	0.0767
77	30	100	656000	3840	CP-OFDM QPSK	137@68	23.37	22.79	26.10	23.9	0.2455
77	30	100	656000	3840	CP-OFDM QPSK	1@1	23.46	22.9	26.20	24	0.2512
77	30	100	656000	3840	CP-OFDM QPSK	1@271	23.41	22.55	26.01	23.81	0.2404
77	30	100	656000	3840	CP-OFDM 16 QAM	137@68	23.03	22.25	25.67	23.47	0.2223
77	30	100	656000	3840	CP-OFDM 16 QAM	1@1	22.98	22.11	25.58	23.38	0.2178
77	30	100	656000	3840	CP-OFDM 16 QAM	1@271	22.82	21.78	25.34	23.14	0.2061
77	30	100	656000	3840	CP-OFDM 64 QAM	137@68	21.47	20.68	24.10	21.9	0.1549
77	30	100	656000	3840	CP-OFDM 64 QAM	1@1	21.42	20.55	24.02	21.82	0.1521
77	30	100	656000	3840	CP-OFDM 64 QAM	1@271	21.32	20.23	23.82	21.62	0.1452
77	30	100	656000	3840	CP-OFDM 256 QAM	137@68	18.32	17.76	21.06	18.86	0.0769
77	30	100	656000	3840	CP-OFDM 256 QAM	1@1	18.3	17.74	21.04	18.84	0.0766
77	30	100	656000	3840	CP-OFDM 256 QAM	1@271	18.16	17.46	20.83	18.63	0.0729
77	30	100	662000	3930	CP-OFDM QPSK	137@68	23.18	22.15	25.71	23.51	0.2244
77	30	100	662000	3930	CP-OFDM QPSK	1@1	23.53	22.71	26.15	23.95	0.2483
77	30	100	662000	3930	CP-OFDM QPSK	1@271	23.6	22.63	26.15	23.95	0.2483
77	30	100	662000	3930	CP-OFDM 16 QAM	137@68	22.93	21.83	25.43	23.23	0.2104
77	30	100	662000	3930	CP-OFDM 16 QAM	1@1	22.98	21.96	25.51	23.31	0.2143
77	30	100	662000	3930	CP-OFDM 16 QAM	1@271	23.05	21.84	25.50	23.3	0.2138
77	30	100	662000	3930	CP-OFDM 64 QAM	137@68	21.34	20.12	23.78	21.58	0.1439
77	30	100	662000	3930	CP-OFDM 64 QAM	1@1	21.39	20.26	23.87	21.67	0.1469
77	30	100	662000	3930	CP-OFDM 64 QAM	1@271	21.5	20.16	23.89	21.69	0.1476

<b>77</b>	30	100	662000	3930	CP-OFDM 256 QAM	137@68	18.22	17.62	20.94	18.74	0.0748
<b>77</b>	30	100	662000	3930	CP-OFDM 256 QAM	1@1	18.24	17.55	20.92	18.72	0.0745
<b>77</b>	30	100	662000	3930	CP-OFDM 256 QAM	1@271	18.39	17.48	20.97	18.77	0.0753

# FR1 N77 MIMO-(ANT4+8)-ANT4

## Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
77	30	20	656000	3840.0	CP-OFDM QPSK	51@0	0.0048	PASS	NV
77	30	20	656000	3840.0	CP-OFDM QPSK	51@0	0.0026	PASS	LV
77	30	20	656000	3840.0	CP-OFDM QPSK	51@0	0.0043	PASS	HV
77	30	20	656000	3840.0	CP-OFDM QPSK	51@0	0.0063	PASS	-30°C
77	30	20	656000	3840.0	CP-OFDM QPSK	51@0	0.0056	PASS	-20°C
77	30	20	656000	3840.0	CP-OFDM QPSK	51@0	0.0058	PASS	-10°C
77	30	20	656000	3840.0	CP-OFDM QPSK	51@0	0.0046	PASS	0°C
77	30	20	656000	3840.0	CP-OFDM QPSK	51@0	0.0064	PASS	10°C
77	30	20	656000	3840.0	CP-OFDM QPSK	51@0	0.0048	PASS	20°C
77	30	20	656000	3840.0	CP-OFDM QPSK	51@0	0.0045	PASS	30°C
77	30	20	656000	3840.0	CP-OFDM QPSK	51@0	0.0040	PASS	40°C
77	30	20	656000	3840.0	CP-OFDM QPSK	51@0	0.0069	PASS	50°C

# Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
77	30	20	656000	3840.0	CP-OFDM QPSK	51@0	7.56	13	PASS

## N77(20M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH




## Occupied Bandwidth

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
77	30	10	656000	3840.0	CP-OFDM QPSK	24@0	8.6119	9.536
77	30	10	656000	3840.0	CP-OFDM 16 QAM	24@0	8.5739	9.607
77	30	10	656000	3840.0	CP-OFDM 64 QAM	24@0	8.5778	9.771
77	30	10	656000	3840.0	CP-OFDM 256 QAM	24@0	8.5734	9.627
77	30	15	656000	3840.0	CP-OFDM QPSK	38@0	13.545	14.9
77	30	15	656000	3840.0	CP-OFDM 16 QAM	38@0	13.572	14.75
77	30	15	656000	3840.0	CP-OFDM 64 QAM	38@0	13.58	14.5
77	30	15	656000	3840.0	CP-OFDM 256 QAM	38@0	13.543	14.92
77	30	20	656000	3840.0	CP-OFDM QPSK	51@0	18.202	19.7
77	30	20	656000	3840.0	CP-OFDM 16 QAM	51@0	18.188	19.6
77	30	20	656000	3840.0	CP-OFDM 64 QAM	51@0	18.181	19.3
77	30	20	656000	3840.0	CP-OFDM 256 QAM	51@0	18.23	19.77
77	30	25	656000	3840.0	CP-OFDM QPSK	65@0	23.104	24.68
77	30	25	656000	3840.0	CP-OFDM 16 QAM	65@0	23.209	24.95
77	30	25	656000	3840.0	CP-OFDM 64 QAM	65@0	23.297	24.24
77	30	25	656000	3840.0	CP-OFDM 256 QAM	65@0	23.224	24.34
77	30	30	656000	3840.0	CP-OFDM QPSK	78@0	27.773	29.34
77	30	30	656000	3840.0	CP-OFDM 16 QAM	78@0	27.816	29.01
77	30	30	656000	3840.0	CP-OFDM 64 QAM	78@0	27.819	29.03
77	30	30	656000	3840.0	CP-OFDM 256 QAM	78@0	27.954	29.23
77	30	40	656000	3840.0	CP-OFDM QPSK	106@0	37.869	39.75
77	30	40	656000	3840.0	CP-OFDM 16 QAM	106@0	37.89	39.17
77	30	40	656000	3840.0	CP-OFDM 64 QAM	106@0	37.785	39.09
77	30	40	656000	3840.0	CP-OFDM 256 QAM	106@0	37.818	39.11
77	30	50	656000	3840.0	CP-OFDM QPSK	133@0	47.414	49.02




77	30	50	656000	3840.0	CP-OFDM 16 QAM	133@0	47.495	49.47
77	30	50	656000	3840.0	CP-OFDM 64 QAM	133@0	47.478	49.31
77	30	50	656000	3840.0	CP-OFDM 256 QAM	133@0	47.318	48.96
77	30	60	656000	3840.0	CP-OFDM QPSK	162@0	57.766	59.64
77	30	60	656000	3840.0	CP-OFDM 16 QAM	162@0	57.754	59.72
77	30	60	656000	3840.0	CP-OFDM 64 QAM	162@0	57.807	59.66
77	30	60	656000	3840.0	CP-OFDM 256 QAM	162@0	57.886	59.82
77	30	70	656000	3840.0	CP-OFDM QPSK	189@0	67.414	69.71
77	30	70	656000	3840.0	CP-OFDM 16 QAM	189@0	67.429	69.71
77	30	70	656000	3840.0	CP-OFDM 64 QAM	189@0	67.456	69.7
77	30	70	656000	3840.0	CP-OFDM 256 QAM	189@0	67.427	69.82
77	30	80	656000	3840.0	CP-OFDM QPSK	217@0	77.523	80.16
77	30	80	656000	3840.0	CP-OFDM 16 QAM	217@0	77.422	80.0
77	30	80	656000	3840.0	CP-OFDM 64 QAM	217@0	77.351	79.93
77	30	80	656000	3840.0	CP-OFDM 256 QAM	217@0	77.545	80.02
77	30	90	656000	3840.0	CP-OFDM QPSK	245@0	87.519	90.27
77	30	90	656000	3840.0	CP-OFDM 16 QAM	245@0	87.505	90.45
77	30	90	656000	3840.0	CP-OFDM 64 QAM	245@0	87.406	90.47
77	30	90	656000	3840.0	CP-OFDM 256 QAM	245@0	87.344	90.34
77	30	100	656000	3840.0	CP-OFDM QPSK	273@0	97.346	100.7
77	30	100	656000	3840.0	CP-OFDM 16 QAM	273@0	97.565	100.5
77	30	100	656000	3840.0	CP-OFDM 64 QAM	273@0	97.46	100.6
77	30	100	656000	3840.0	CP-OFDM 256 QAM	273@0	97.559	100.5


### N77(10M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

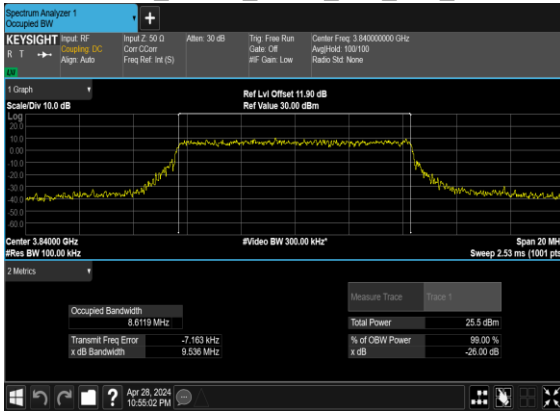


### N77(10M)\_CP-OFDM\_16QAM\_Outer\_Full\_Mid\_CH

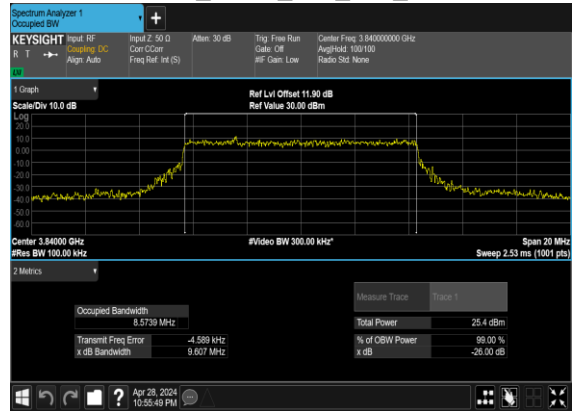


### N77(10M)\_CP-OFDM\_64QAM\_Outer\_Full\_Mid\_CH

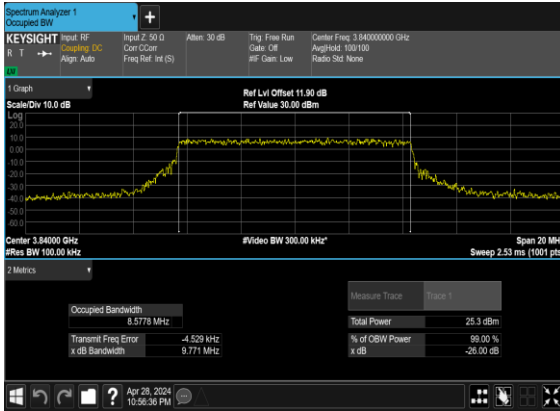


### N77(10M)\_CP-OFDM\_256QAM\_Outer\_Full\_Mid\_CH

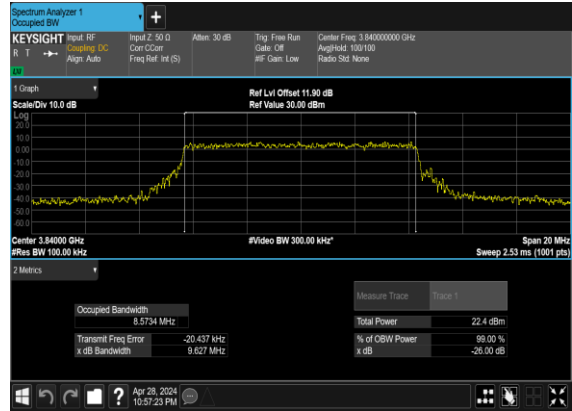


### N77(15M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

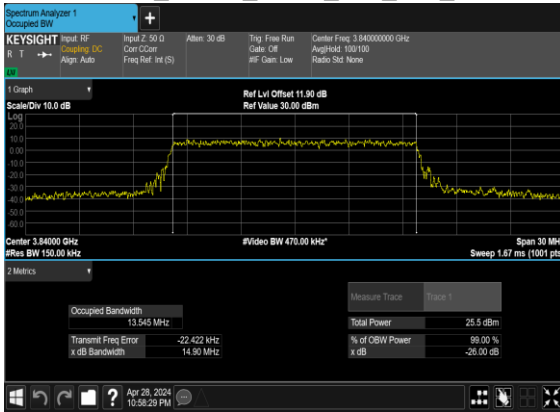


### N77(15M)\_CP-OFDM\_16QAM\_Outer\_Full\_Mid\_CH

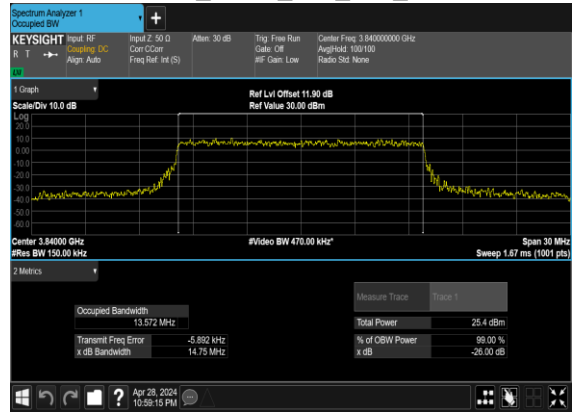


### N77(15M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

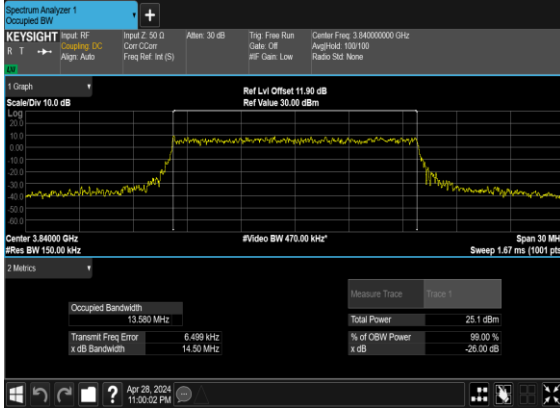


### N77(15M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

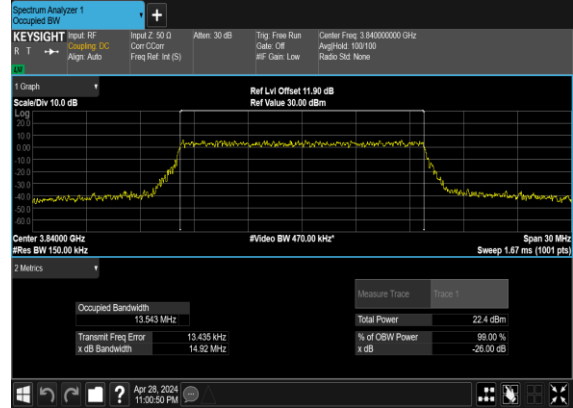


### N77(20M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

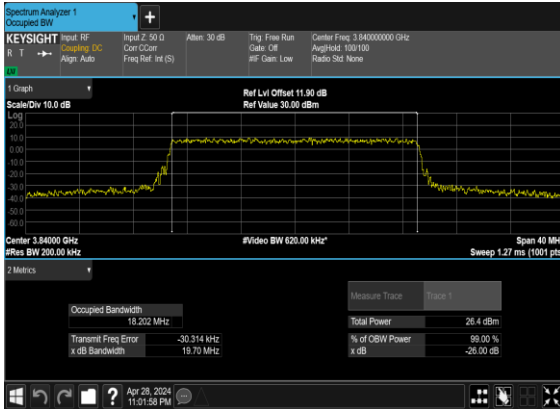


### N77(20M)\_CP-OFDM\_16 QAM\_Outer\_Full\_Mid\_CH

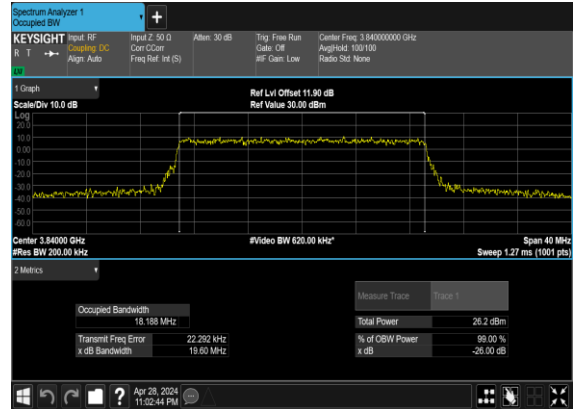


### N77(20M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

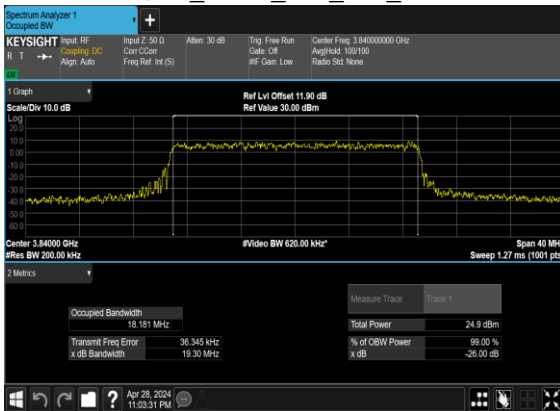

### N77(20M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

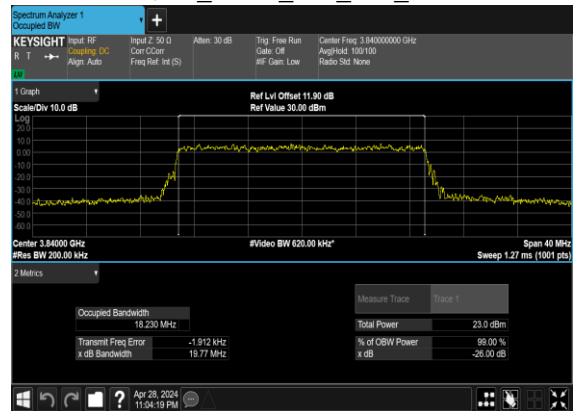


### N77(25M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

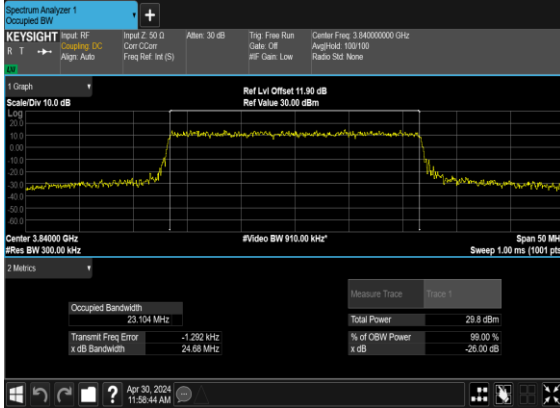


### N77(25M)\_CP-OFDM\_16QAM\_Outer\_Full\_Mid\_CH




### N77(25M)\_CP-OFDM\_64QAM\_Outer\_Full\_Mid\_CH

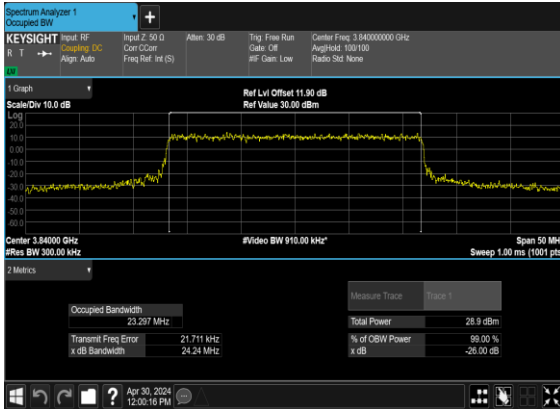


### N77(25M)\_CP-OFDM\_256QAM\_Outer\_Full\_Mid\_CH

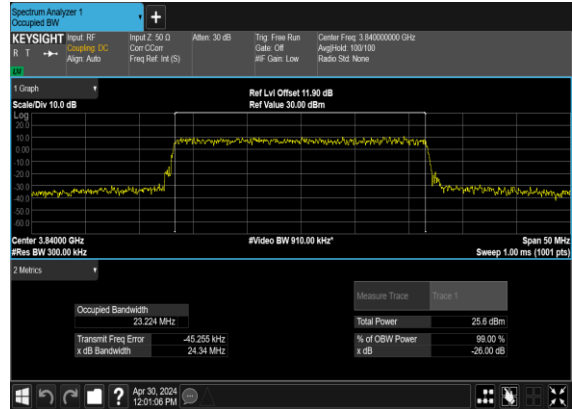


### N77(30M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

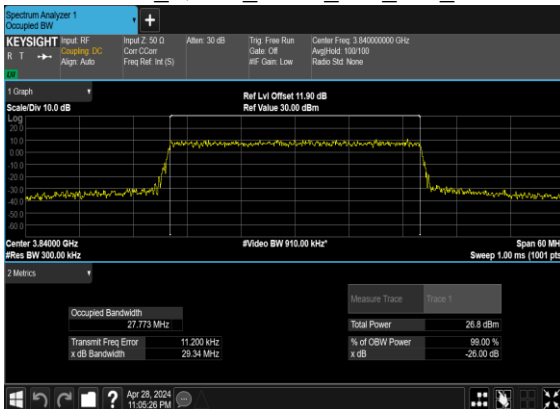


### N77(30M)\_CP-OFDM\_16QAM\_Outer\_Full\_Mid\_CH

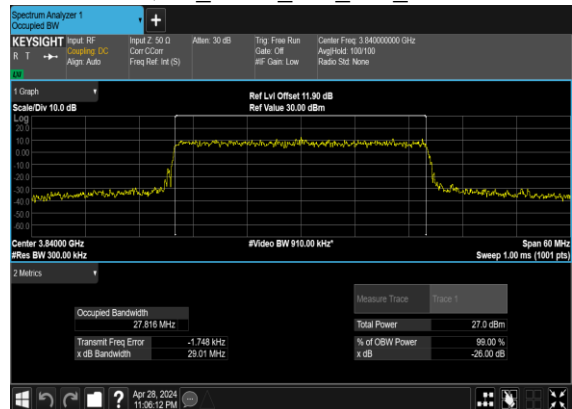

### N77(30M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

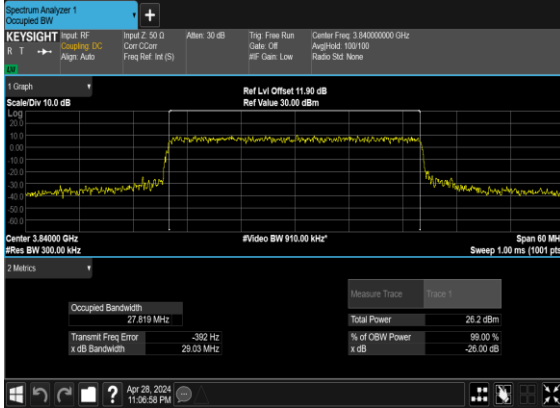


### N77(30M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

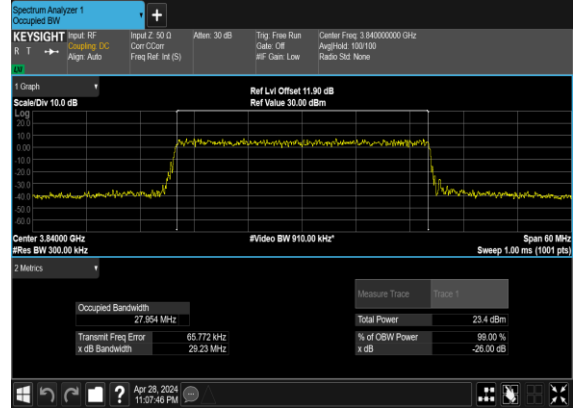


### N77(40M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH




### N77(40M)\_CP-OFDM\_16 QAM\_Outer\_Full\_Mid\_CH

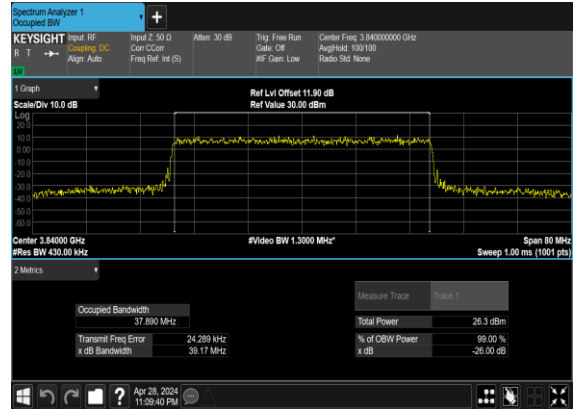


### N77(40M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

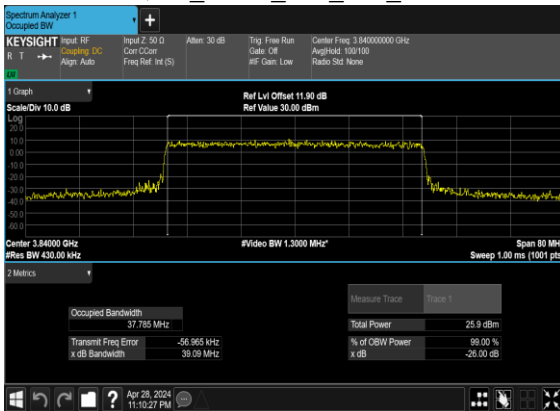


### N77(40M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

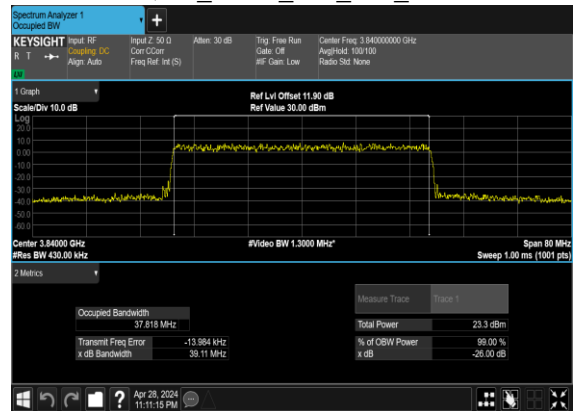


### N77(50M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

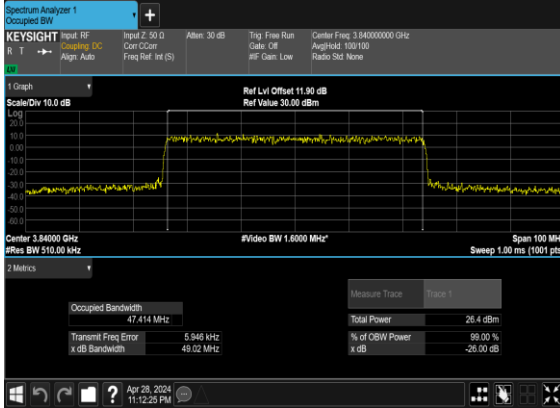


### N77(50M)\_CP-OFDM\_16QAM\_Outer\_Full\_Mid\_CH

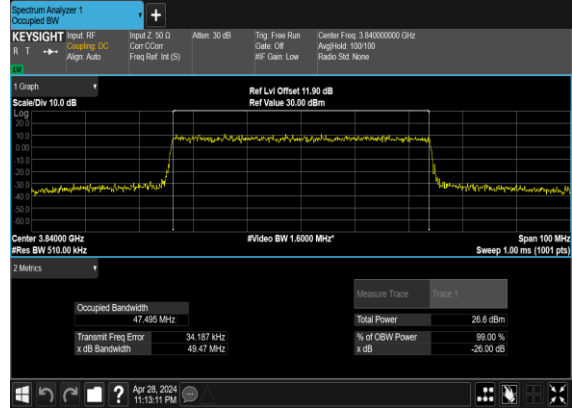

### N77(50M)\_CP-OFDM\_64QAM\_Outer\_Full\_Mid\_CH

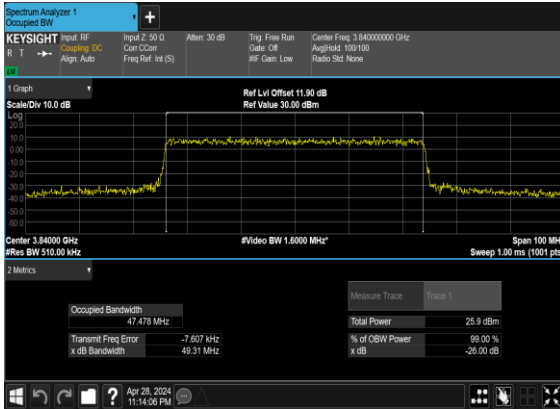


### N77(50M)\_CP-OFDM\_256QAM\_Outer\_Full\_Mid\_CH

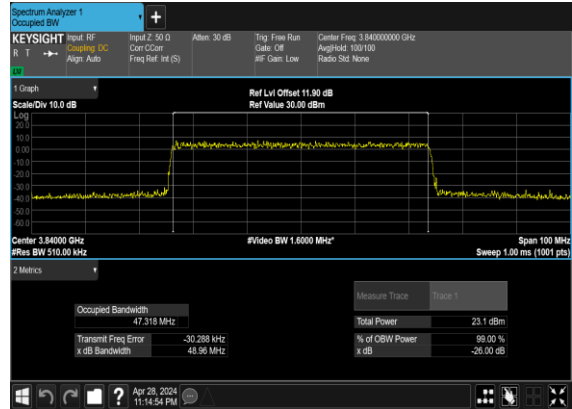


### N77(60M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH




### N77(60M)\_CP-OFDM\_16QAM\_Outer\_Full\_Mid\_CH

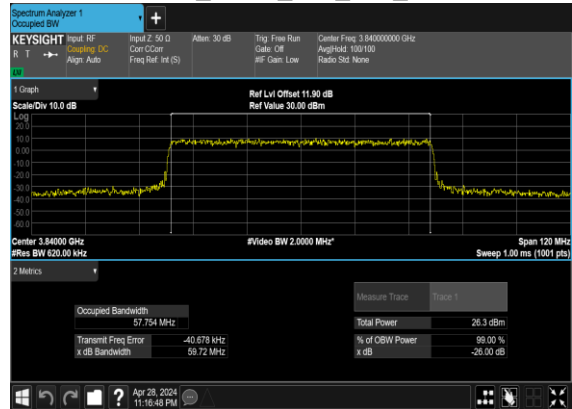

### N77(60M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

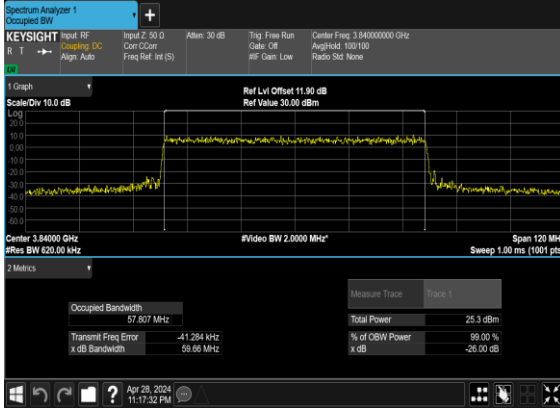


### N77(60M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

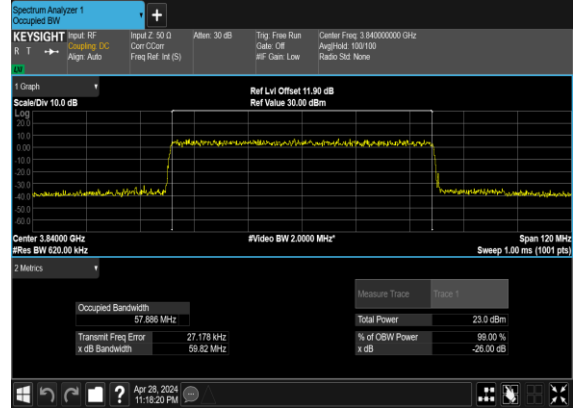


### N77(70M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH




### N77(70M)\_CP-OFDM\_16 QAM\_Outer\_Full\_Mid\_CH

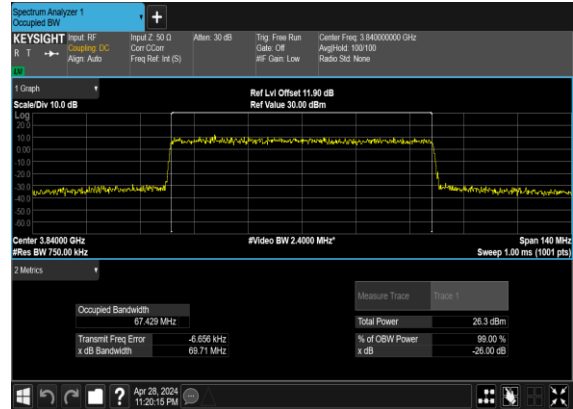


### N77(70M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

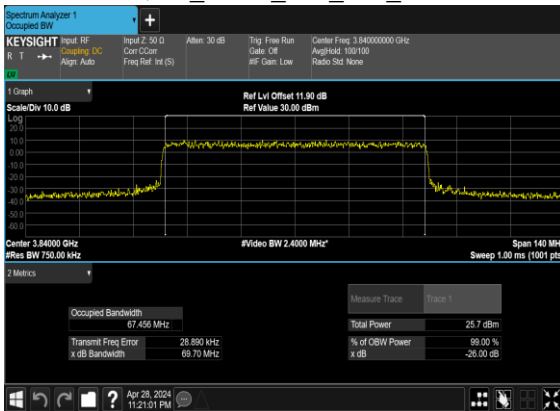


### N77(70M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

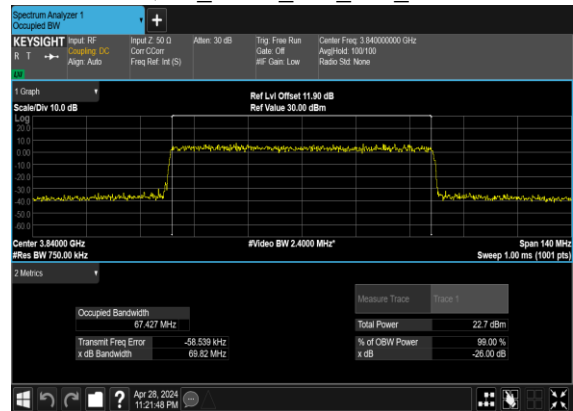


### N77(80M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

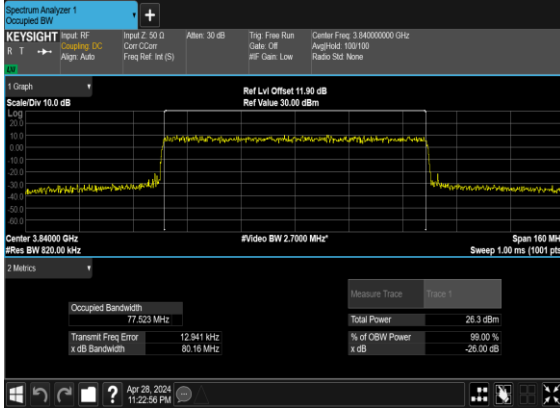


### N77(80M)\_CP-OFDM\_16 QAM\_Outer\_Full\_Mid\_CH

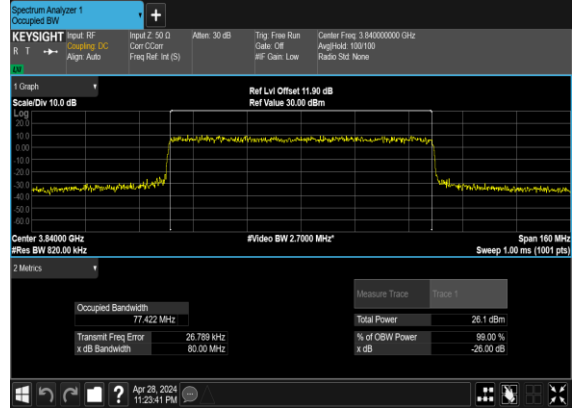


### N77(80M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

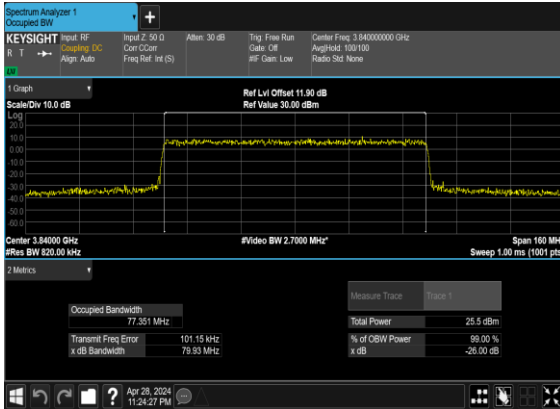


### N77(80M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

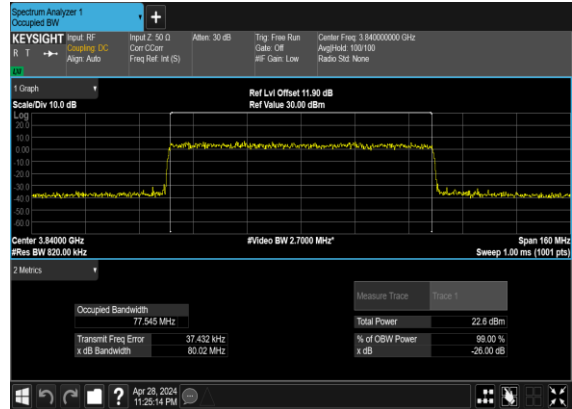

### N77(90M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

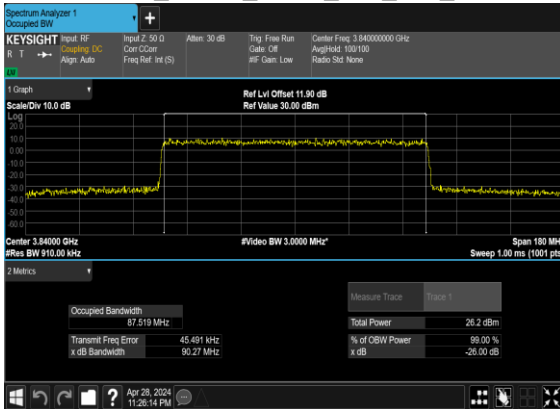


### N77(90M)\_CP-OFDM\_16 QAM\_Outer\_Full\_Mid\_CH

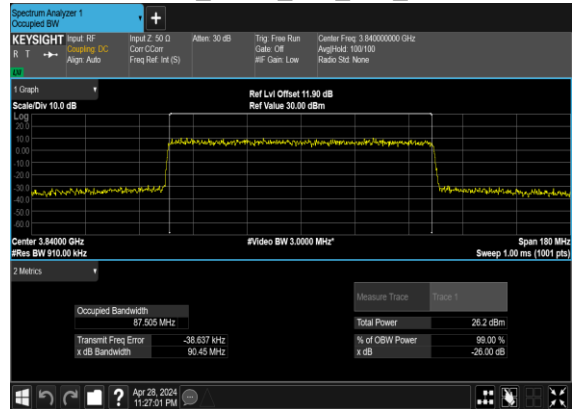





### N77(90M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

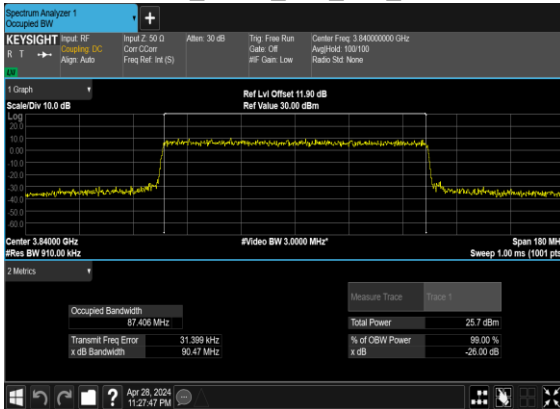


### N77(90M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

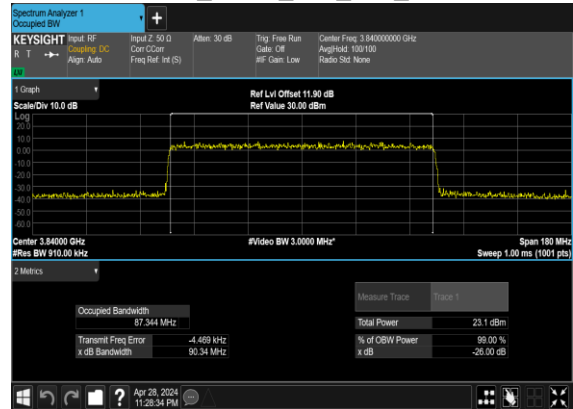


### N77(100M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

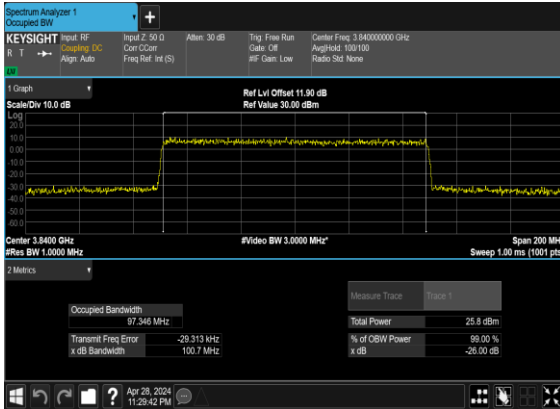


### N77(100M)\_CP-OFDM\_16 QAM\_Outer\_Full\_Mid\_CH

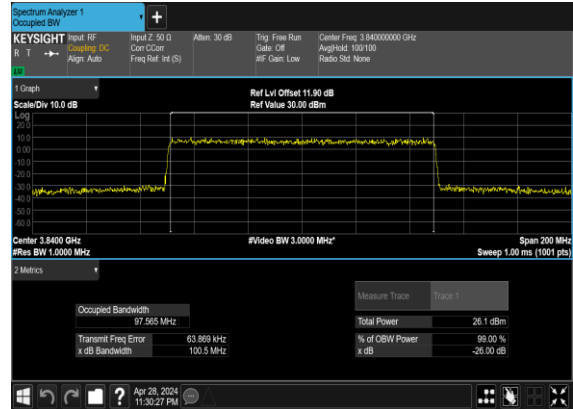

### N77(100M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

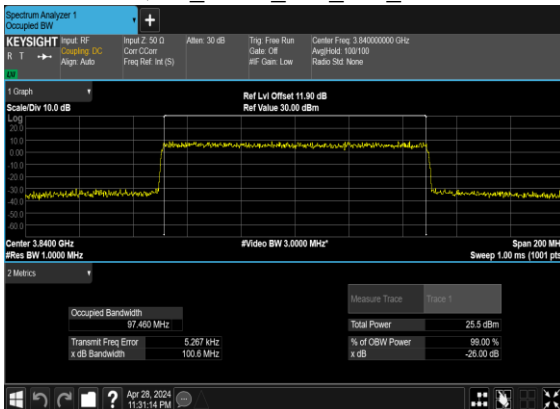

### N77(100M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

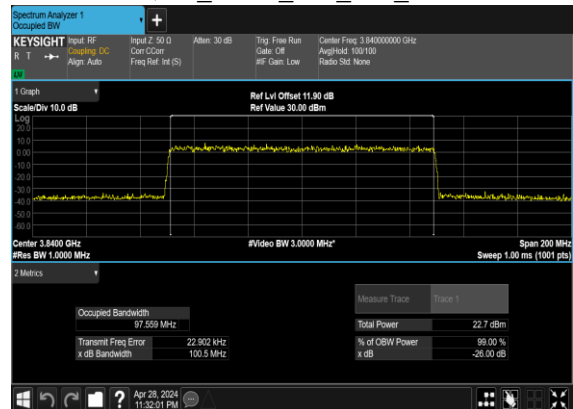


## Conducted Spurious Emissions


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
77	30	10	647000	3705.0	CP-OFDM QPSK	1@0	see graph	---
77	30	10	647000	3705.0	CP-OFDM QPSK	1@0	see graph	PASS
77	30	10	647000	3705.0	CP-OFDM QPSK	1@0	see graph	PASS
77	30	10	656000	3840.0	CP-OFDM QPSK	1@0	see graph	---
77	30	10	656000	3840.0	CP-OFDM QPSK	1@0	see graph	PASS
77	30	10	656000	3840.0	CP-OFDM QPSK	1@0	see graph	PASS
77	30	10	665000	3975.0	CP-OFDM QPSK	1@0	see graph	---
77	30	10	665000	3975.0	CP-OFDM QPSK	1@0	see graph	PASS
77	30	10	665000	3975.0	CP-OFDM QPSK	1@0	see graph	PASS
77	30	50	648334	3725.01	CP-OFDM QPSK	1@0	see graph	---
77	30	50	648334	3725.01	CP-OFDM QPSK	1@0	see graph	PASS
77	30	50	648334	3725.01	CP-OFDM QPSK	1@0	see graph	PASS
77	30	50	656000	3840.0	CP-OFDM QPSK	1@0	see graph	---
77	30	50	656000	3840.0	CP-OFDM QPSK	1@0	see graph	PASS
77	30	50	656000	3840.0	CP-OFDM QPSK	1@0	see graph	PASS
77	30	50	663666	3954.99	CP-OFDM QPSK	1@0	see graph	---
77	30	50	663666	3954.99	CP-OFDM QPSK	1@0	see graph	PASS
77	30	50	663666	3954.99	CP-OFDM QPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	CP-OFDM QPSK	1@0	see graph	---
77	30	100	650000	3750.0	CP-OFDM QPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	CP-OFDM QPSK	1@0	see graph	PASS
77	30	100	656000	3840.0	CP-OFDM QPSK	1@0	see graph	---

<b>77</b>	30	100	656000	3840.0	CP-OFDM QPSK	1@0	see graph	<b>PASS</b>
<b>77</b>	30	100	656000	3840.0	CP-OFDM QPSK	1@0	see graph	<b>PASS</b>
<b>77</b>	30	100	662000	3930.0	CP-OFDM QPSK	1@0	see graph	---
<b>77</b>	30	100	662000	3930.0	CP-OFDM QPSK	1@0	see graph	<b>PASS</b>
<b>77</b>	30	100	662000	3930.0	CP-OFDM QPSK	1@0	see graph	<b>PASS</b>


### N77(10M)\_CP- OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

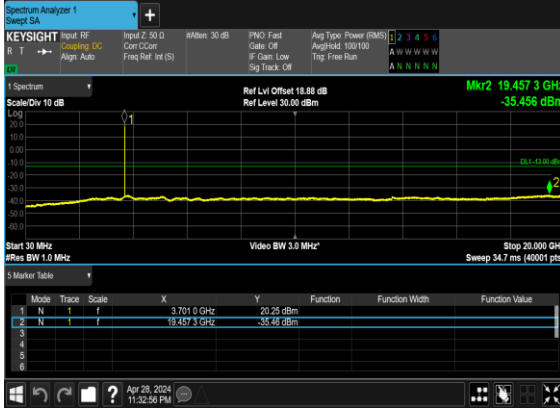


### N77(10M)\_CP- OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

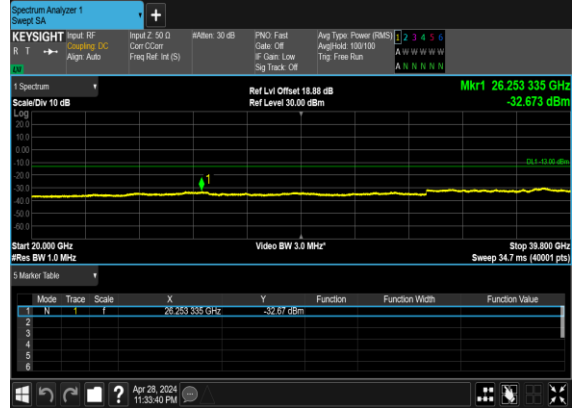

### N77(10M)\_CP- OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

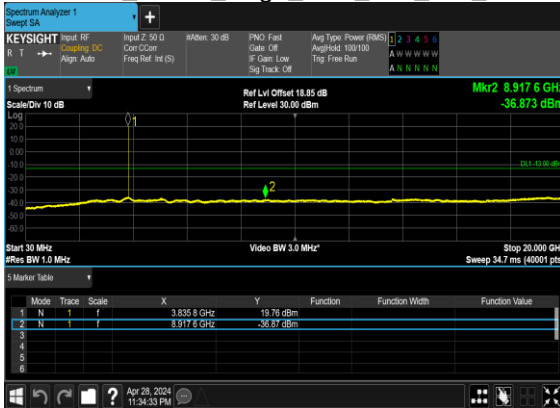

### N77(10M)\_CP- OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

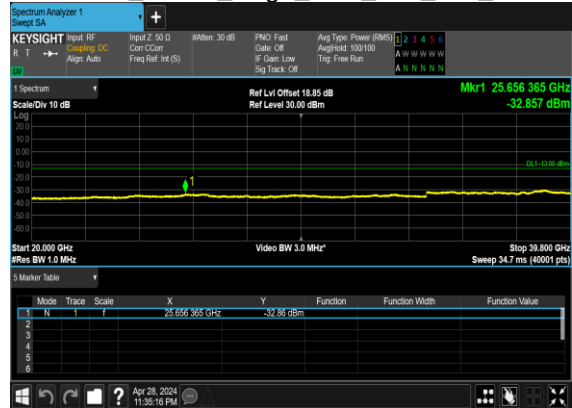


### N77(10M)\_CP- OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH




### N77(10M)\_CP- OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH




### N77(50M)\_CP- OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

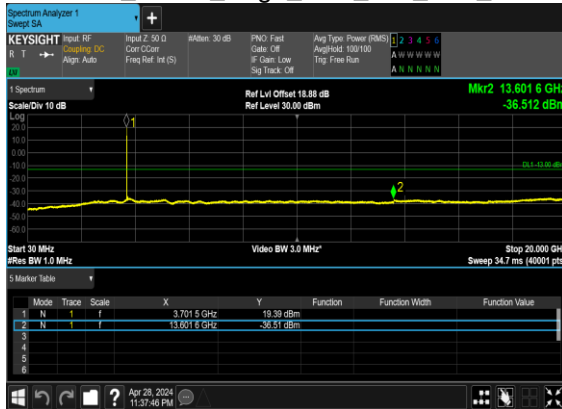


### N77(50M)\_CP- OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

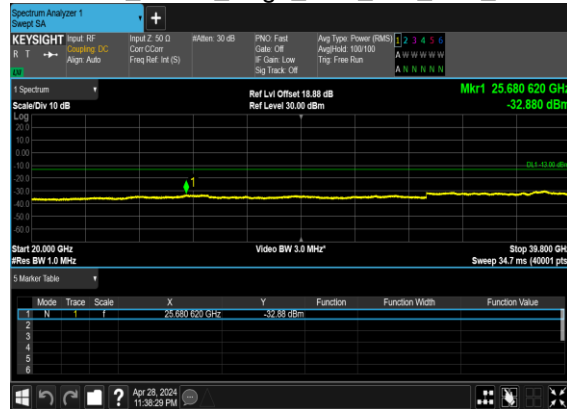

### N77(50M)\_CP- OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

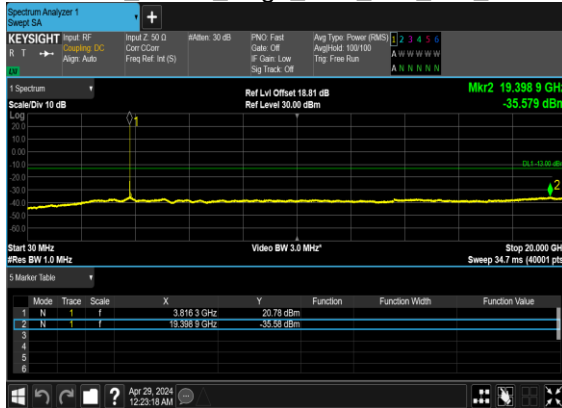


### N77(50M)\_CP- OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

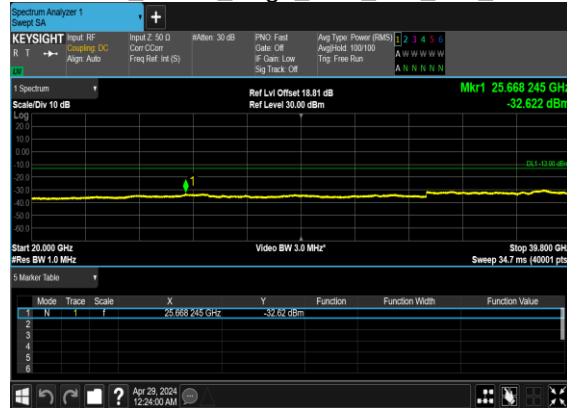


### N77(50M)\_CP- OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH




### N77(50M)\_CP- OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH

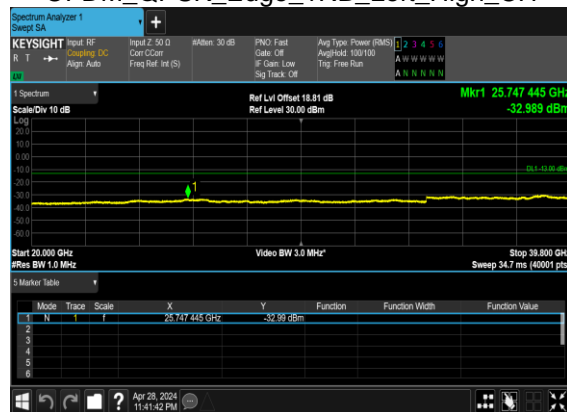

### N77(100M)\_CP- OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

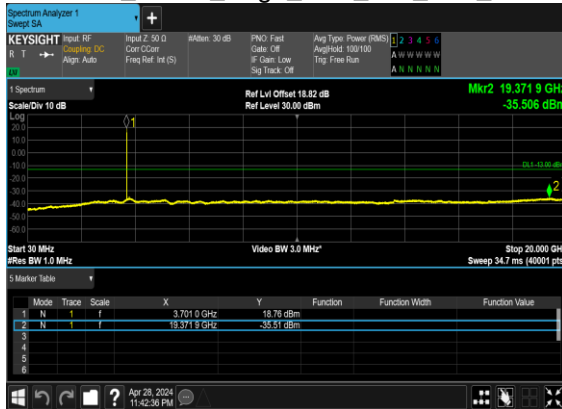


### N77(100M)\_CP- OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

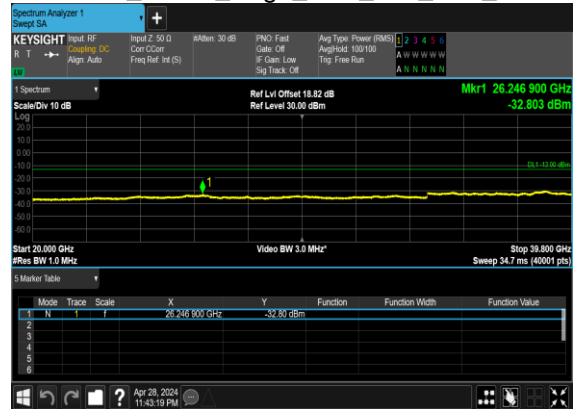


### N77(100M)\_CP- OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH




### N77(100M)\_CP- OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

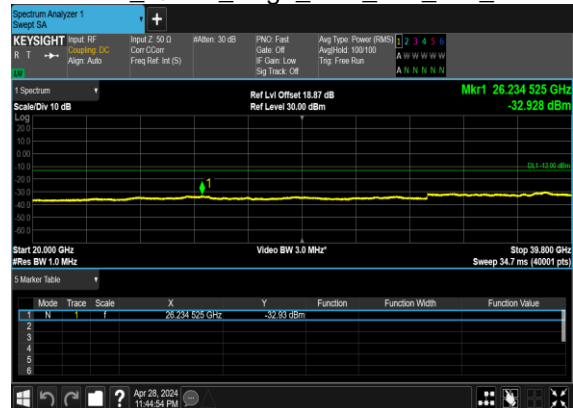

### N77(100M)\_CP- OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH

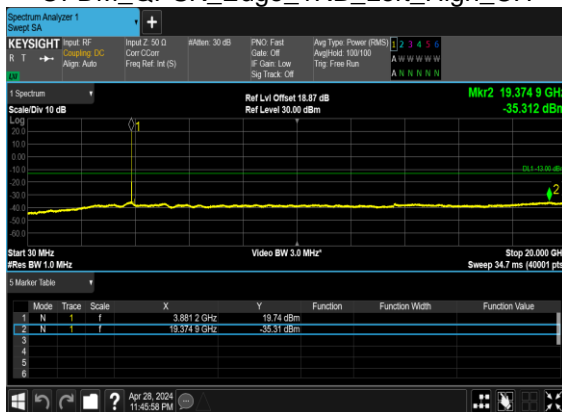


### N77(100M)\_CP- OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH

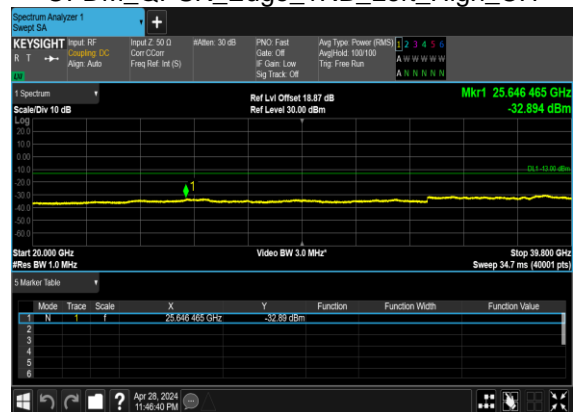


## Conducted Band Edge

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
77	30	10	647000	3705.0	CP-OFDM QPSK	1@0	see graph	PASS
77	30	10	647000	3705.0	CP-OFDM QPSK	24@0	see graph	PASS
77	30	10	665000	3975.0	CP-OFDM QPSK	1@23	see graph	PASS
77	30	10	665000	3975.0	CP-OFDM QPSK	24@0	see graph	PASS
77	30	50	648334	3725.01	CP-OFDM QPSK	1@0	see graph	PASS
77	30	50	648334	3725.01	CP-OFDM QPSK	133@0	see graph	PASS
77	30	50	663666	3954.99	CP-OFDM QPSK	1@132	see graph	PASS
77	30	50	663666	3954.99	CP-OFDM QPSK	133@0	see graph	PASS
77	30	100	650000	3750.0	CP-OFDM QPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	CP-OFDM QPSK	273@0	see graph	PASS
77	30	100	662000	3930.0	CP-OFDM QPSK	1@272	see graph	PASS
77	30	100	662000	3930.0	CP-OFDM QPSK	273@0	see graph	PASS


N77(10M)\_CP-  
OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

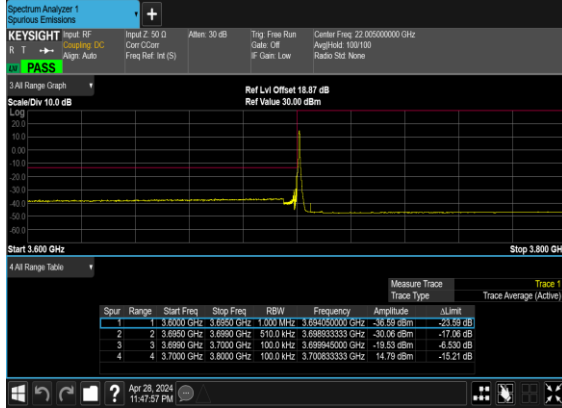


N77(10M)\_CP-  
OFDM\_QPSK\_Outer\_Full\_Low\_CH

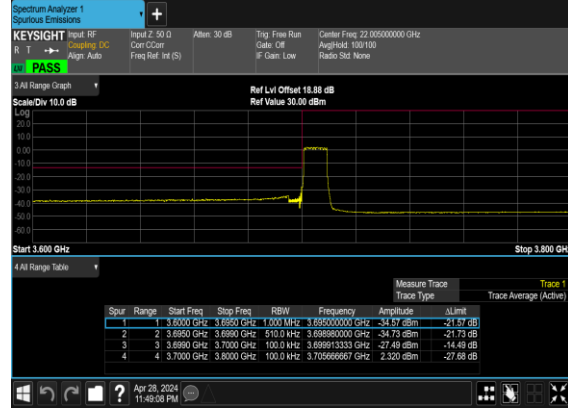


N77(10M)\_CP-  
OFDM\_QPSK\_Edge\_1RB\_Right\_High\_CH

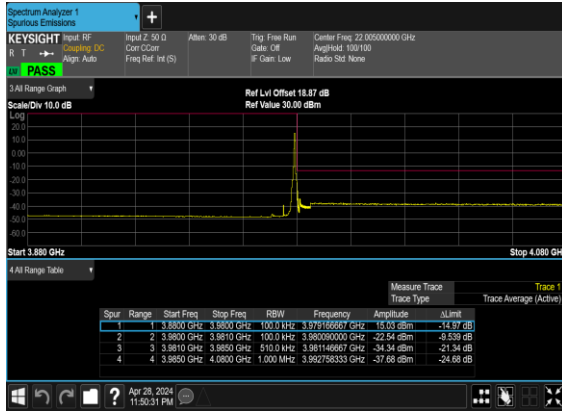


N77(10M)\_CP-  
OFDM\_QPSK\_Outer\_Full\_High\_CH

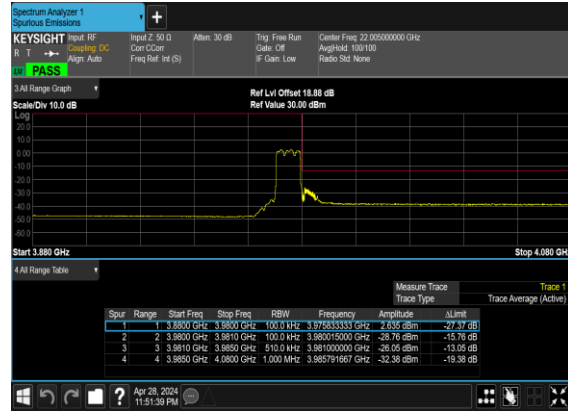

N77(50M)\_CP-  
OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

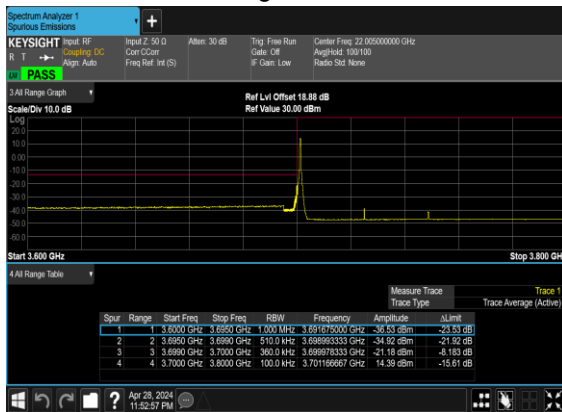


N77(50M)\_CP-  
OFDM\_QPSK\_Outer\_Full\_Low\_CH

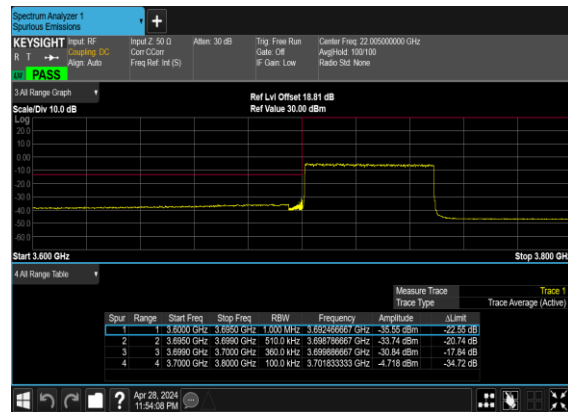




### N77(50M)\_CP- OFDM\_QPSK\_Edge\_1RB\_Right\_High\_CH

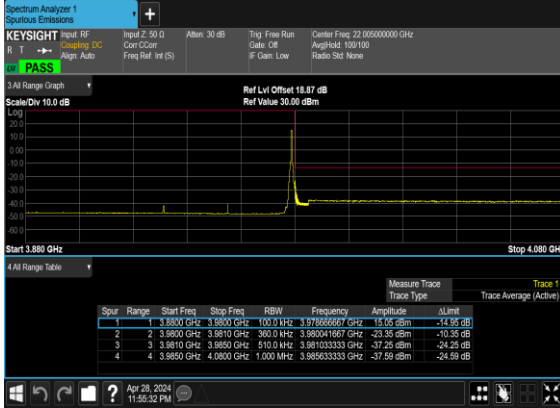


### N77(50M)\_CP- OFDM\_QPSK\_Outer\_Full\_High\_CH




### N77(100M)\_CP- OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

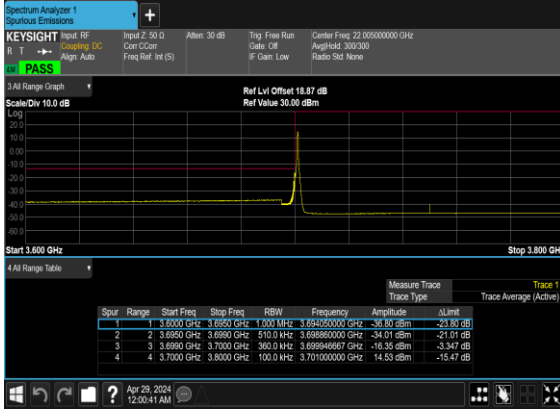


### N77(100M)\_CP- OFDM\_QPSK\_Outer\_Full\_Low\_CH

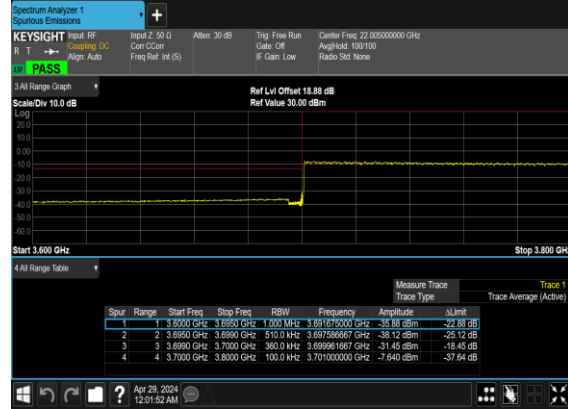

### N77(100M)\_CP- OFDM\_QPSK\_Edge\_1RB\_Right\_High\_CH

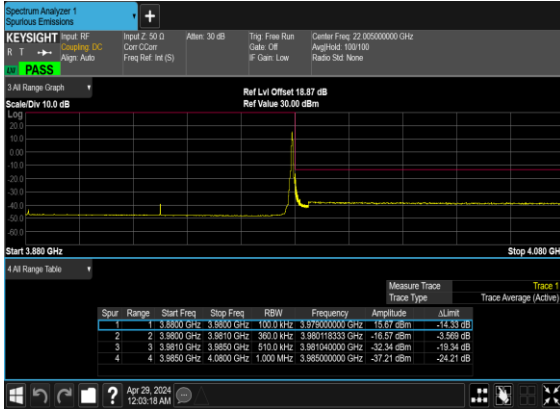

### N77(100M)\_CP- OFDM\_QPSK\_Outer\_Full\_High\_CH

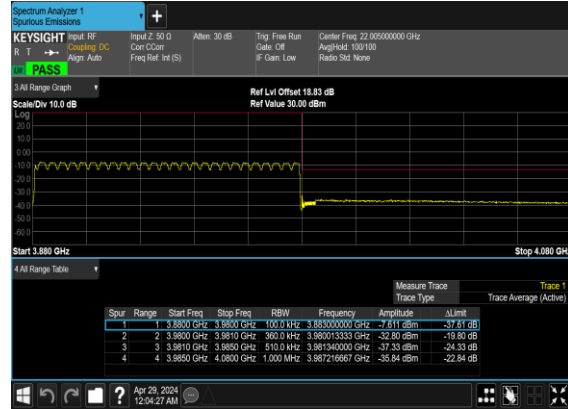

# FR1 N77 MIMO(ANT4+8)-ANT8

## Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
77	30	20	656000	3840.0	CP-OFDM QPSK	51@0	0.0056	PASS	NV
77	30	20	656000	3840.0	CP-OFDM QPSK	51@0	0.0043	PASS	LV
77	30	20	656000	3840.0	CP-OFDM QPSK	51@0	0.0032	PASS	HV
77	30	20	656000	3840.0	CP-OFDM QPSK	51@0	0.0036	PASS	-30°C
77	30	20	656000	3840.0	CP-OFDM QPSK	51@0	0.0020	PASS	-20°C
77	30	20	656000	3840.0	CP-OFDM QPSK	51@0	0.0033	PASS	-10°C
77	30	20	656000	3840.0	CP-OFDM QPSK	51@0	0.0027	PASS	0°C
77	30	20	656000	3840.0	CP-OFDM QPSK	51@0	0.0050	PASS	10°C
77	30	20	656000	3840.0	CP-OFDM QPSK	51@0	0.0056	PASS	20°C
77	30	20	656000	3840.0	CP-OFDM QPSK	51@0	0.0042	PASS	30°C
77	30	20	656000	3840.0	CP-OFDM QPSK	51@0	0.0051	PASS	40°C
77	30	20	656000	3840.0	CP-OFDM QPSK	51@0	0.0061	PASS	50°C

# Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
77	30	20	656000	3840.0	CP-OFDM QPSK	51@0	7.17	13	PASS

N77(20M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH




## Occupied Bandwidth


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
77	30	10	656000	3840.0	CP-OFDM QPSK	24@0	8.5708	9.542
77	30	10	656000	3840.0	CP-OFDM 16 QAM	24@0	8.5984	9.4
77	30	10	656000	3840.0	CP-OFDM 64 QAM	24@0	8.5396	9.811
77	30	10	656000	3840.0	CP-OFDM 256 QAM	24@0	8.5595	9.415
77	30	15	656000	3840.0	CP-OFDM QPSK	38@0	13.574	14.98
77	30	15	656000	3840.0	CP-OFDM 16 QAM	38@0	13.541	14.68
77	30	15	656000	3840.0	CP-OFDM 64 QAM	38@0	13.593	14.49
77	30	15	656000	3840.0	CP-OFDM 256 QAM	38@0	13.569	14.76
77	30	20	656000	3840.0	CP-OFDM QPSK	51@0	18.166	19.43
77	30	20	656000	3840.0	CP-OFDM 16 QAM	51@0	18.254	19.33
77	30	20	656000	3840.0	CP-OFDM 64 QAM	51@0	18.17	19.34
77	30	20	656000	3840.0	CP-OFDM 256 QAM	51@0	18.183	19.29
77	30	25	656000	3840.0	CP-OFDM QPSK	65@0	23.259	24.8
77	30	25	656000	3840.0	CP-OFDM 16 QAM	65@0	23.199	24.75
77	30	25	656000	3840.0	CP-OFDM 64 QAM	65@0	23.286	24.41
77	30	25	656000	3840.0	CP-OFDM 256 QAM	65@0	23.241	24.32
77	30	30	656000	3840.0	CP-OFDM QPSK	78@0	27.939	29.2
77	30	30	656000	3840.0	CP-OFDM 16 QAM	78@0	27.761	29.27
77	30	30	656000	3840.0	CP-OFDM 64 QAM	78@0	27.826	29.2
77	30	30	656000	3840.0	CP-OFDM 256 QAM	78@0	27.785	29.32
77	30	40	656000	3840.0	CP-OFDM QPSK	106@0	37.83	39.66
77	30	40	656000	3840.0	CP-OFDM 16 QAM	106@0	37.82	39.46
77	30	40	656000	3840.0	CP-OFDM 64 QAM	106@0	37.87	39.45
77	30	40	656000	3840.0	CP-OFDM 256 QAM	106@0	37.774	39.38
77	30	50	656000	3840.0	CP-OFDM QPSK	133@0	47.39	48.96

77	30	50	656000	3840.0	CP-OFDM 16 QAM	133@0	47.461	49.16
77	30	50	656000	3840.0	CP-OFDM 64 QAM	133@0	47.485	49.01
77	30	50	656000	3840.0	CP-OFDM 256 QAM	133@0	47.492	49.2
77	30	60	656000	3840.0	CP-OFDM QPSK	162@0	57.728	59.7
77	30	60	656000	3840.0	CP-OFDM 16 QAM	162@0	57.703	59.67
77	30	60	656000	3840.0	CP-OFDM 64 QAM	162@0	57.81	60.35
77	30	60	656000	3840.0	CP-OFDM 256 QAM	162@0	57.81	59.81
77	30	70	656000	3840.0	CP-OFDM QPSK	189@0	67.366	69.68
77	30	70	656000	3840.0	CP-OFDM 16 QAM	189@0	67.52	69.96
77	30	70	656000	3840.0	CP-OFDM 64 QAM	189@0	67.681	69.8
77	30	70	656000	3840.0	CP-OFDM 256 QAM	189@0	67.602	70.0
77	30	80	656000	3840.0	CP-OFDM QPSK	217@0	77.414	80.05
77	30	80	656000	3840.0	CP-OFDM 16 QAM	217@0	77.502	80.13
77	30	80	656000	3840.0	CP-OFDM 64 QAM	217@0	77.635	80.0
77	30	80	656000	3840.0	CP-OFDM 256 QAM	217@0	77.376	79.93
77	30	90	656000	3840.0	CP-OFDM QPSK	245@0	87.465	90.31
77	30	90	656000	3840.0	CP-OFDM 16 QAM	245@0	87.331	90.24
77	30	90	656000	3840.0	CP-OFDM 64 QAM	245@0	87.46	90.37
77	30	90	656000	3840.0	CP-OFDM 256 QAM	245@0	87.305	90.17
77	30	100	656000	3840.0	CP-OFDM QPSK	273@0	97.604	100.7
77	30	100	656000	3840.0	CP-OFDM 16 QAM	273@0	97.494	100.6
77	30	100	656000	3840.0	CP-OFDM 64 QAM	273@0	97.51	100.7
77	30	100	656000	3840.0	CP-OFDM 256 QAM	273@0	97.339	100.4

### N77(10M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

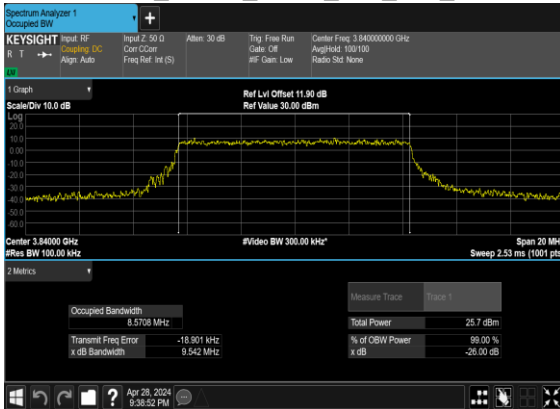


### N77(10M)\_CP-OFDM\_16QAM\_Outer\_Full\_Mid\_CH

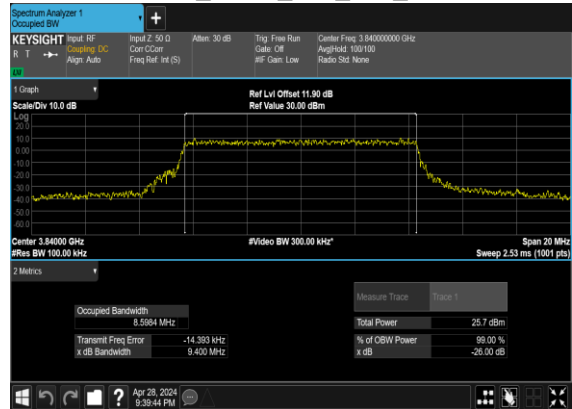


### N77(10M)\_CP-OFDM\_64QAM\_Outer\_Full\_Mid\_CH




### N77(10M)\_CP-OFDM\_256QAM\_Outer\_Full\_Mid\_CH

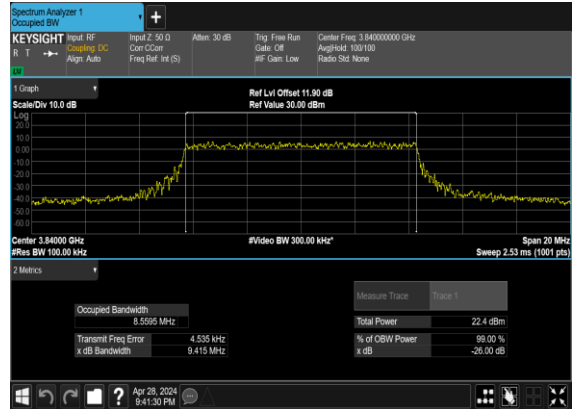


### N77(15M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

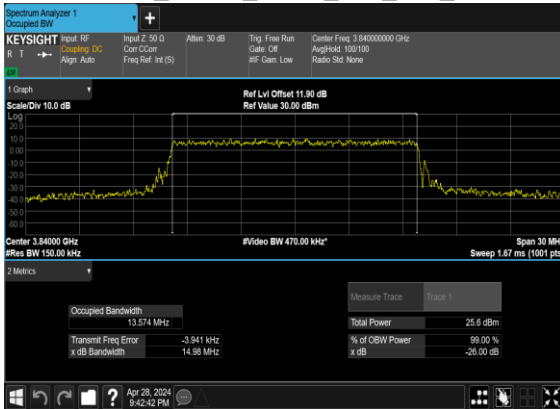


### N77(15M)\_CP-OFDM\_16QAM\_Outer\_Full\_Mid\_CH

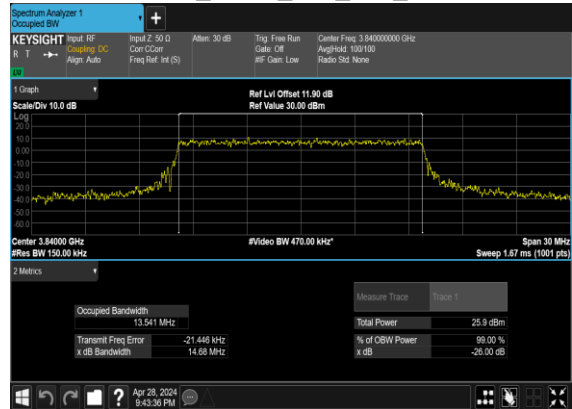


### N77(15M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

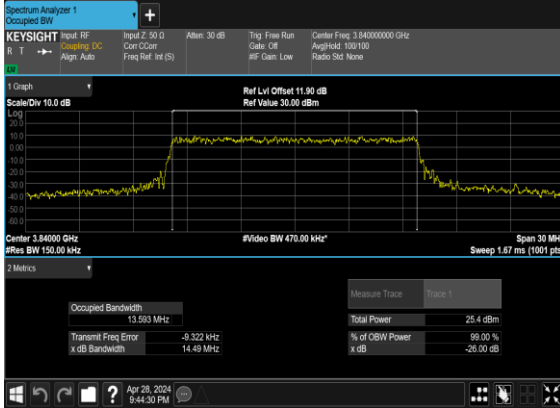


### N77(15M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

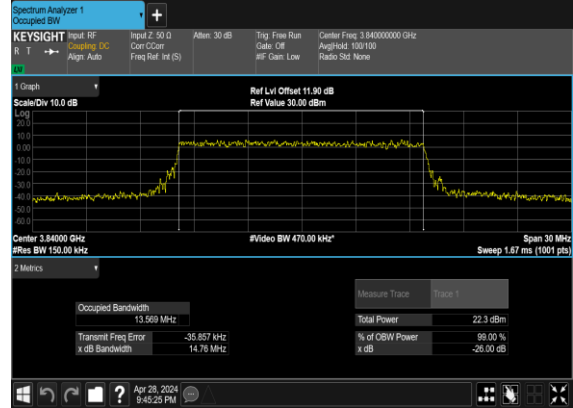


### N77(20M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

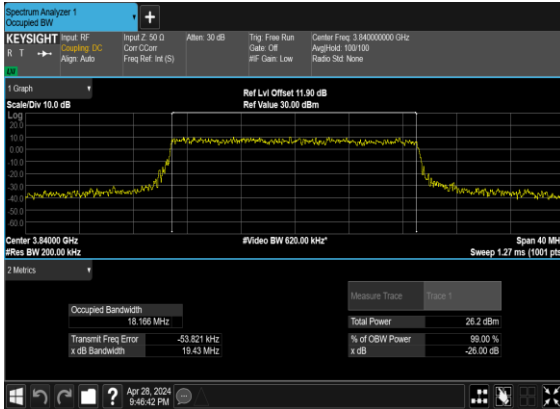

### N77(20M)\_CP-OFDM\_16 QAM\_Outer\_Full\_Mid\_CH

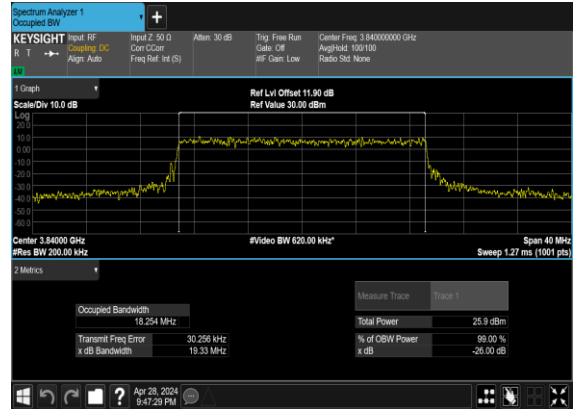

### N77(20M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

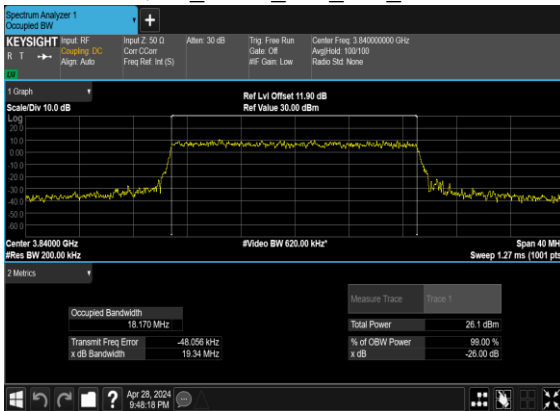

### N77(20M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

