



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2451-1, XT2451-2
FCC ID : IHDT56AP9
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : 15E 6 GHz Low Power Indoor Client (6XD)
TEST DATE(S) : Feb. 19, 2024 ~ Jun. 13, 2024

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



Table of Contents

- 1 General Description 5**
 - 1.1 Applicant 5
 - 1.2 Manufacturer 5
 - 1.3 Product Feature of Equipment Under Test 5
 - 1.4 Product Specification of Equipment Under Test 6
 - 1.5 Modification of EUT 9
 - 1.6 Specification of Accessory 9
 - 1.7 Testing Location 9
 - 1.8 Test Software 9
 - 1.9 Applicable Standards 10
- 2 Test Configuration of Equipment Under Test 11**
 - 2.1 Carrier Frequency and Channel 11
 - 2.2 Test Mode 14
 - 2.3 Connection Diagram of Test System 15
 - 2.4 Support Unit used in test configuration and system 16
 - 2.5 EUT Operation Test Setup 16
 - 2.6 Measurement Results Explanation Example 17
- 3 Test Result 18**
 - 3.1 26dB & 99% Occupied Bandwidth Measurement 18
 - 3.2 Maximum conducted Output Power and Fundamental Maximum EIRP Measurement 19
 - 3.3 Fundamental Power Spectral Density Measurement 20
 - 3.4 In-Band Emissions (Channel Mask) 22
 - 3.5 Contention Based Protocol 24
 - 3.6 Unwanted Emissions Measurement 33
 - 3.7 AC Conducted Emission Measurement 37
 - 3.8 Antenna Requirements 39
- 4 List of Measuring Equipment 40**
- 5 Measurement Uncertainty 41**
- Appendix A. Conducted Test Results**
- Appendix B. AC Conducted Emission Test Result**
- Appendix C. Radiated Spurious Emission**
- Appendix D. Radiated Spurious Emission Plots**
- Appendix E. Duty Cycle Plots**
- Appendix F. Setup Photographs**



History of this test report

Report No.	Version	Description	Issued Date
FR420703G	01	Initial issue of report	Apr. 12, 2024
FR420703G	02	Updated 26dB & 99% Occupied channel bandwidth and In-Band Emissions (Channel Mask) for 802.11ax HE80	Jun.13, 2024



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.407(a)(11)	26dB Emission Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	1
3.2	15.407(a)(8)	Maximum Conducted Output Power	Reporting only	-
3.2	15.407(a)(8)	Fundamental Maximum EIRP	Pass	-
3.3	15.407(a)(8)	Fundamental Power Spectral Density	Pass	-
3.4	15.407(b)(7)	In-Band Emissions (Channel Mask)	Pass	-
3.5	15.407(d)(6)	Contention Based Protocol	Pass	
3.6	15.407(b)	Unwanted Emissions	Pass	Under limit 3.05 dB at 7125.280 MHz
3.7	15.207	AC Conducted Emission	Pass	Under limit 13.68 dB at 0.150 MHz
3.8	15.203 15.407(a)	Antenna Requirement	Pass	-

Remark 1: For channels with a nominal bandwidth of 320MHz,compliance is demonstrated by way of the 99% OBW

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2451-1, XT2451-2
FCC ID	IHDT56AP9
IMEI Code	Conducted: 350431590014232/350431590014240 Conduction: 350431590015254/350431590015262 Radiation: 350431590015650/350431590015668 CBP: 350431590015015/350431590015023
HW Version	DVT2
SW Version	U3UX34.16
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. The two model names are only for market segment, no other difference.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	U-NII-5: 5925 MHz ~ 6425 MHz U-NII-6: 6425 MHz ~ 6525 MHz U-NII-7: 6525 MHz ~ 6875 MHz U-NII-8: 6875 MHz ~ 7125 MHz
Maximum EIRP	<5925 MHz ~ 7125 MHz > 802.11a : 8.40 dBm / 0.0069 W 802.11ax HE20 : 9.09 dBm / 0.0081 W 802.11ax HE40 : 10.29 dBm / 0.0107 W 802.11ax HE80 : 10.29 dBm / 0.0107 W 802.11ax HE160 : 10.61 dBm / 0.0115 W 802.11be EHT20 : 9.02 dBm / 0.0080 W 802.11be EHT40 : 10.11 dBm / 0.0103 W 802.11be EHT80 : 10.32 dBm / 0.0108 W 802.11be EHT160 : 10.16 dBm / 0.0104 W 802.11be EHT320 : 10.71 dBm / 0.0118 W
99% Occupied Bandwidth	802.11a : 17.782 MHz 802.11ax HE20 : 19.341 MHz 802.11ax HE40 : 38.362 MHz 802.11ax HE80 : 78.961 MHz 802.11ax HE160 : 157.283 MHz 802.11be EHT20 : 19.341 MHz 802.11be EHT40 : 38.282 MHz 802.11be EHT80 : 78.162 MHz 802.11be EHT160 : 157.283 MHz 802.11be EHT320 : 315.844 MHz
Antenna Type / Gain	<5925 MHz ~ 6425 MHz > <Ant. 5>: Loop Antenna with gain -3.70 dBi <Ant. 7>: IFA Antenna with gain -3.90 dBi <6425 MHz ~ 6525 MHz > <Ant. 5>: Loop Antenna with gain -5.50 dBi <Ant. 7>: IFA Antenna with gain -4.70 dBi <6525 MHz ~ 6875 MHz > <Ant. 5>: Loop Antenna with gain -6.60 dBi <Ant. 7>: IFA Antenna with gain -5.10 dBi <6875 MHz ~ 7125 MHz > <Ant. 5>: Loop Antenna with gain -5.30 dBi <Ant. 7>: IFA Antenna with gain -6.21 dBi
Type of Modulation	802.11a: OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ax: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM) 802.11be: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM / 4096QAM)

Remark:

1. The device support WIFI MIMO CDD mode.
2. The CBP mode does not support channel puncturing function. (Channel puncturing is only used for optimizing network performance)
3. 802.11ax/be support full RU tone and partial RU tone, both full RU and partial RU-left (for low CH) and partial RU-right (for high CH) are tested for conducted power/PSD/Channel Mask in appendix A, all the other test case were performed with full RU with its maximum power/PSD.

4. 802.11be support small size RU, Large size RU and Puncturing modes as below, which is less than full RU conducted power, therefore have assessed only Power Density/RSE.

<Small size RU 52+26 Tone>:

Bandwidth	Tones		Index		For test modes configure
20MHz	26	52	1	38	1
20MHz	52	26	38	4	2
20MHz	52	26	39	7	3

<Small size RU 106+26 Tone>:

Bandwidth	Tones		Index		For test modes configure
20MHz	106	26	53	4	1
20MHz	26	106	4	54	2

<Large size RU 484+242 tone> & <80M BW Puncturing 20MHz>:

Bandwidth	Tones		Index		For test modes configure
80MHz	242	484	62	66	1
80MHz	242	484	61	66	2
80MHz	484	242	65	64	3
80MHz	484	242	65	63	4

<Large size RU 996+484 tone> & <160M BW Puncturing 40MHz>:

Bandwidth	Tones		Index		For test modes configure
160MHz	484-Left	996-Right	66-Left	67-Right	1
160MHz	484-Left	996-Right	65-Left	67-Right	2
160MHz	996-Left	484-Right	67-Left	66-Right	3
160MHz	996-Left	484-Right	67-Left	65-Right	4

<Large size RU 996+484+242 tone> & <160M BW Puncturing 20MHz>:

Bandwidth	Tones			Index			For test modes configure
160MHz	242-Left	484-Left	996-Right	62-Left	66-Left	67-Right	1
160MHz	242-Left	484-Left	996-Right	61-Left	66-Left	67-Right	2
160MHz	484-Left	242-Left	996-Right	65-Left	64-Left	67-Right	3
160MHz	484-Left	242-Left	996-Right	65-Left	63-Left	67-Right	4
160MHz	996-Left	242-Right	484-Right	67-Left	62-Right	66-Right	5
160MHz	996-Left	242-Right	484-Right	67-Left	61-Right	66-Right	6
160MHz	996-Left	484-Right	242-Right	67-Left	65-Right	64-Right	7
160MHz	996-Left	484-Right	242-Right	67-Left	65-Right	63-Right	8

Only the worse cases are shown in this report.



<Large size RU 3*996 tone> & <320M BW Puncturing 80MHz>:

Bandwidth	Tones	Index	For test modes configure
320MHz			1
			2
			3
			4

<Large size RU 3*996+484 tone> & <320M BW Puncturing 40MHz>:

Bandwidth	Tones	Index	For test modes configure
320MHz			1
			2
			3
			4
			5
			6
			7
			8

<Large size RU 2*996+484 tone> & <320M BW Puncturing 80+40MHz>:

Bandwidth	Tones	Index	For test modes configure
320MHz			1
			2
			3
			4
			5
			6
			7
			8
			9
			10
			11
			12

Only the worse cases are shown in this report.



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Specification of Accessory

Specification of Accessory				
Battery 1	Brand Name	Motorola (ATL)	Model Name	QR10
Battery 2	Brand Name	Motorola (ATL)	Model Name	QR30
USB Cable 1	Brand Name	Motorola (Saibao)	Model Name	SC18D86731
USB Cable 2	Brand Name	Motorola (Luxshare)	Model Name	SC18E08103

1.7 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-SZ TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-SZ	CN1256	421272

1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH04-SZ	AUDIX	E3	6.2009-8-24
2.	CO01-SZ	AUDIX	E3	6.120613b



1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 987594 D02 U-NII 6 GHz EMC Measurement v02r01
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

<U-NII-5, 6, 7, 8>

BW 20M	Channel	2	1	5	9	13	17	21	25	29	
	Freq. (MHz)	5935	5955	5975	5995	6015	6035	6055	6075	6095	
BW 40M	Channel	3			11		19		27		
	Freq. (MHz)	5965			6005		6045		6085		
BW 80M	Channel	7					23				
	Freq. (MHz)	5985					6065				
BW 160M	Channel	15									
	Freq. (MHz)	6025									
BW 20M	Channel	33	37	41	45	49	53	57	61		
	Freq. (MHz)	6115	6135	6155	6175	6195	6215	6235	6255		
BW 40M	Channel	35			43		51		59		
	Freq. (MHz)	6125			6165		6205		6245		
BW 80M	Channel	39					55				
	Freq. (MHz)	6145					6225				
BW 160M	Channel	47									
	Freq. (MHz)	6185									
BW 320M	Channel	31					63				
	Freq. (MHz)	6105					6265				



BW 20M	Channel	65	69	73	77	81	85	89	93
	Freq. (MHz)	6275	6295	6315	6335	6355	6375	6395	6415
BW 40M	Channel	67		75		83		91	
	Freq. (MHz)	6285		6325		6365		6405	
BW 80M	Channel	71				87			
	Freq. (MHz)	6305				6385			
BW 160M	Channel	79							
	Freq. (MHz)	6345							
BW 320M	Channel	95							
	Freq. (MHz)	6425							

BW 20M	Channel	97	101	105	109	113	117	121	125
	Freq. (MHz)	6435	6455	6475	6495	6515	6535	6555	6575
BW 40M	Channel	99		107		115		123	
	Freq. (MHz)	6445		6485		6525		6565	
BW 80M	Channel	103				119			
	Freq. (MHz)	6465				6545			
BW 160M	Channel	111							
	Freq. (MHz)	6505							

BW 20M	Channel	129	133	137	141	145	149	153	157
	Freq. (MHz)	6595	6615	6635	6655	6675	6695	6715	6735
BW 40M	Channel	131		139		147		155	
	Freq. (MHz)	6605		6645		6685		6725	
BW 80M	Channel	135				151			
	Freq. (MHz)	6625				6705			
BW 160M	Channel	143							
	Freq. (MHz)	6665							
BW 320M	Channel	127							
	Freq. (MHz)	6585							



BW 20M	Channel	161	165	169	173	177	181	185	189
	Freq. (MHz)	6755	6775	6795	6815	6835	6855	6875	6895
BW 40M	Channel	163		171		179		187	
	Freq. (MHz)	6765		6805		6845		6885	
BW 80M	Channel	167				183			
	Freq. (MHz)	6785				6865			
BW 160M	Channel	175							
	Freq. (MHz)	6825							
BW 320M	Channel	159							
	Freq. (MHz)	6745							

BW 20M	Channel	193	197	201	205	209	213	217	221
	Freq. (MHz)	6915	6935	6955	6975	6995	7015	7035	7055
BW 40M	Channel	195		203		211		219	
	Freq. (MHz)	6925		6965		7005		7045	
BW 80M	Channel	199				215			
	Freq. (MHz)	6945				7025			
BW 160M	Channel	207							
	Freq. (MHz)	6985							
BW 320M	Channel	191							
	Freq. (MHz)	6905							

BW 20M	Channel	225		229		233			
	Freq. (MHz)	7075		7095		7115			
BW 40M	Channel	227							
	Freq. (MHz)	7085							



2.2 Test Mode

Final RSE test modes are considering the modulation and worse data rates refer to Appendix C.

Remark:

1. For simultaneous transmission test modes, the combination testing was assessed from the worst RSE link mode of WWAN (GSM/WCDMA/LTE/5GNR) and the worst RSE link mode of BT / WLAN (2.4G/6G).
2. For Radiated Test Cases, the EUT is a folding phone, pretest the open status and closed status, only the worst status perform final test and record in the report.
3. For the accessories, pretest standalone mode / Earphone mode / Adapter mode / Wireless charging mode, only the worst status perform final test and record in the report.

Test Cases	
AC Conducted Emission	Mode 1 : GSM850 Idle + BT Link + WLAN Link(6G) + USB Cable(Charging from Adapter1) + Battery 1

Ch. #		5925-6425 MHz UNII-5 20M BW	6425-6525 MHz UNII-6 20M BW	6525-6875 MHz UNII-7 20M BW	6875-7125 MHz UNII-8 20M BW
L	Low	001/002	097	117	189
M	Middle	045	105	149	209
H	High	093	113	181	229/233
Straddle		-	-	-	185

Ch. #		5925-6425 MHz UNII-5 40M BW	6425-6525 MHz UNII-6 40M BW	6525-6875 MHz UNII-7 40M BW	6875-7125 MHz UNII-8 40M BW
L	Low	003	099	123	195
M	Middle	043	-	147	203
H	High	091	107	179	227
Straddle		-	115	-	187

Ch. #		5925-6425 MHz UNII-5 80M BW	6425-6525 MHz UNII-6 80M BW	6525-6875 MHz UNII-7 80M BW	6875-7125 MHz UNII-8 80M BW
L	Low	007	103	135	199
M	Middle	039		151	-
H	High	087		167	215
Straddle		-	119	183	-


Ch. #		5925-6425 MHz UNII-5 160M BW	6425-6525 MHz UNII-6 160M BW	6525-6875 MHz UNII-7 160M BW	6875-7125 MHz UNII-8 160M BW
L	Low	015	-	143	207
M	Middle	047			
H	High	079			
Straddle		-	111	175	-

Ch. #		UNII-5	UNII-6	UNII-7	UNII-8
		320M BW	320M BW	320M BW	320M BW
L	Low	-	-	-	-
M	Middle	031			
H	High	063			
Straddle		095	127	159	191


Remark: For radiation spurious emission, the final modulation and the worst data rate was reference the max RF conducted power.

2.3 Connection Diagram of Test System

For AC Conducted Emission:

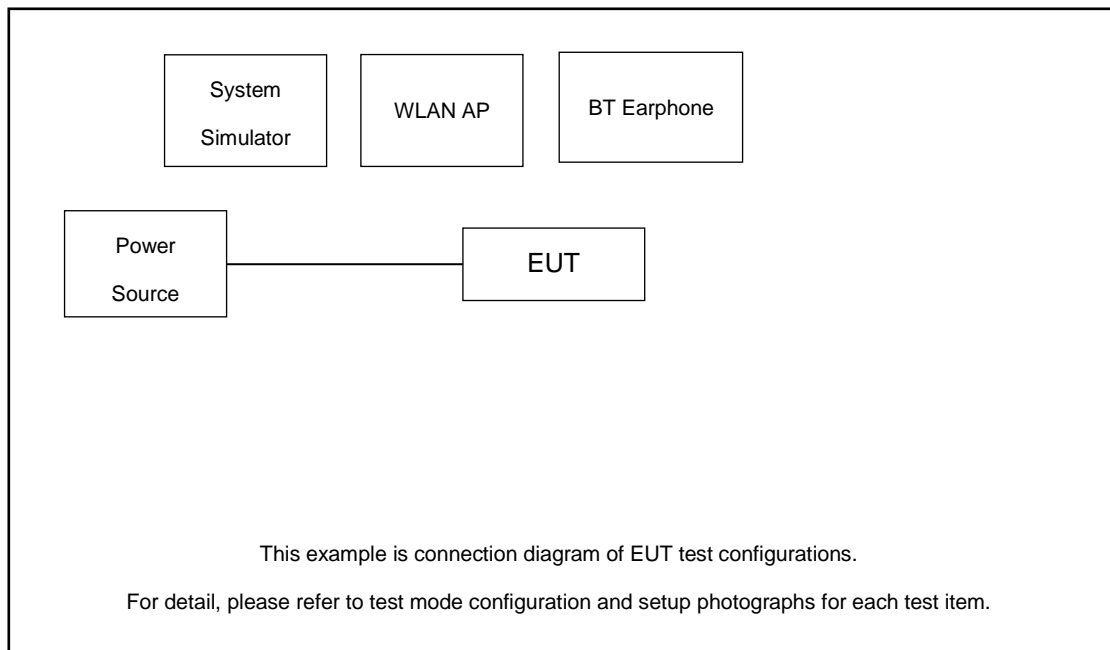

For Radiated Emission:

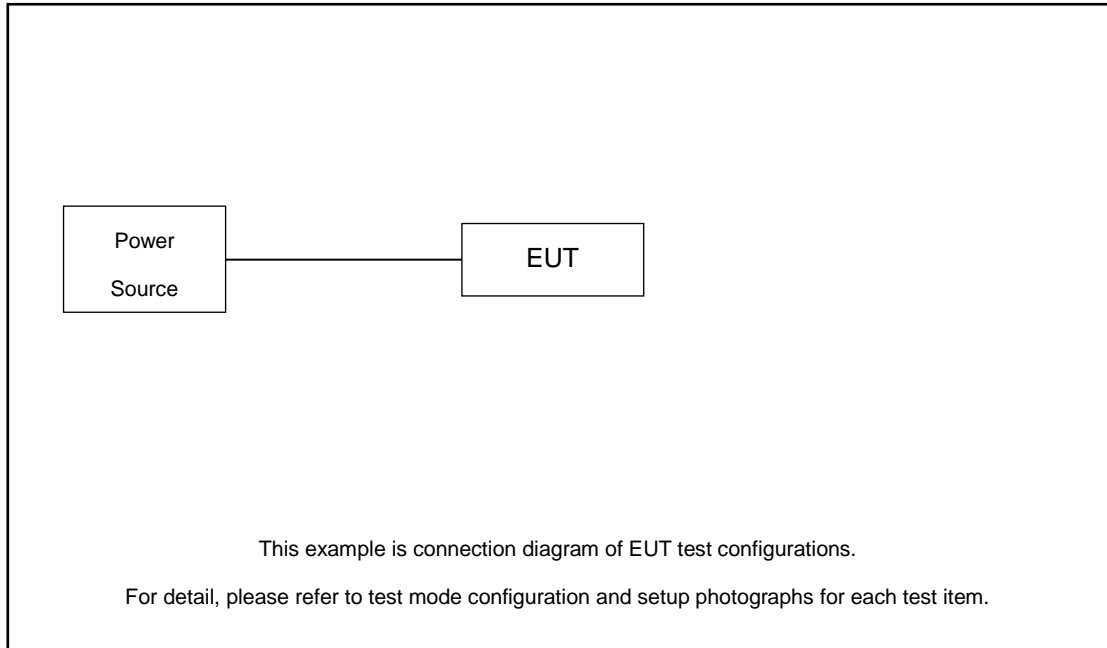

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A
3.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program (QRCT TX Tool) was provided and enabled to make EUT continuously transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5.86 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 5.86 + 10 = 15.86 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 CFR 15.407 (a)(11)

The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.

3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
8. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Maximum conducted Output Power and Fundamental Maximum EIRP Measurement

3.2.1 Limit of Fundamental Maximum EIRP

<FCC 14-30 CFR 15.407>

(a)(8) For client devices operating under the control of an indoor access point in the 5.925-7.125 GHz bands, the maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm.

3.2.2 Measuring Instruments

See list of measuring equipment of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.
4. For MIMO mode, the measure-and-sum technique should be used for measuring the in-band transmit power of a device.

3.2.4 Test Setup

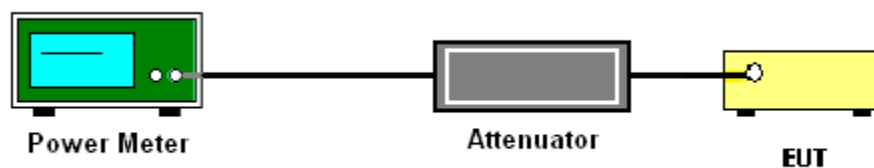

3.2.5 Test Result of Fundamental Maximum EIRP

Please refer to Appendix A.



3.3 Fundamental Power Spectral Density Measurement

3.3.1 Limit of Fundamental Power Spectral Density

<FCC 14-30 CFR 15.407>

(a)(8) For client devices operating under the control of an indoor access point in the 5.925-7.125 GHz bands, the maximum power spectral density must not exceed -1 dBm e.i.r.p. in any 1-megahertz band.

3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.

Method SA-2


(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW ≥ 3 MHz.
 - Number of points in sweep ≥ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, attenuator loss and duty factor. Measure the PPSD and record it.
 3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (b): Measure and sum spectral maxima across the outputs.

The measurement on each individual output were performed with the same span and number on each individual output. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs.

3.3.4 Test Setup

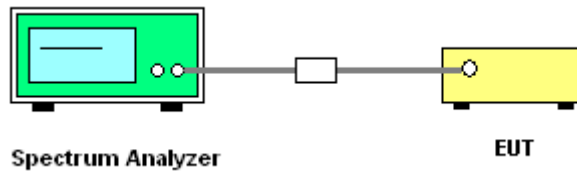

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 In-Band Emissions (Channel Mask)

3.4.1 Limit of Unwanted Emissions

<FCC 14-30 CFR 15.407>

(b)(7) For transmitters operating within the 5.925-7.125 GHz bands: Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

3.4.2 Measuring Instruments

See list of measuring equipment of this test report.

3.4.3 Test Procedures


The testing follows FCC KDB 987594 D02 U-NII 6GHz EMC Measurement.

Section J) In-Band Emissions.

1. Take nominal bandwidth as reference channel bandwidth provided that 26 dB emission bandwidth is always larger than nominal bandwidth
2. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:
 - a) Set the span to encompass the entire 26 dB EBW of the signal.
 - b) Set RBW = same RBW used for 26 dB EBW measurement.
 - c) Set VBW $\geq 3 \times$ RBW
 - d) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
 - e) Sweep time = auto.
 - f) Detector = RMS (i.e., power averaging)
 - g) Trace average at least 100 traces in power averaging (rms) mode.
 - h) Use the peak search function on the instrument to find the peak of the spectrum.
3. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:
 - a. Suppressed by 20 dB at 1 MHz outside of the channel edge.
 - b. Suppressed by 28 dB at one channel bandwidth from the channel center.

- c. Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
4. Adjust the span to encompass the entire mask as necessary.
5. Clear trace.
6. Trace average at least 100 traces in power averaging (rms) mode.
7. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

3.4.4 Test Setup

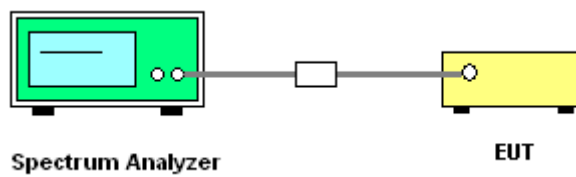

3.4.5 Test Result

Please refer to Appendix A.

3.5 Contention Based Protocol

3.5.1 Limit of Contention Based Protocol

<FCC 14-30 CFR 15.407>

(d)(6) Indoor access points, subordinate devices and client devices operating in the 5.925-7.125 GHz band must employ a contention-based protocol.

Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel and stay off the channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm). The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain. To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel. For example, an 802.11 device that plans to transmit a 40 MHz- wide signal (on a primary 20 MHz channel and a secondary 20 MHz channel) must detect energy throughout the entire 40 MHz channel. Additionally, low-power indoor devices must detect co-channel energy with 90% or greater certainty.

Table 1. Criteria to determine number of times detection threshold test may be performed

If	Number of Tests	Placement of Incumbent Transmission
$BW_{EUT} \leq BW_{Inc}$	Once	Tune incumbent and EUT transmissions ($f_{c1} = f_{c2}$)
$BW_{Inc} < BW_{EUT} \leq 2BW_{Inc}$	Once	Incumbent transmission is contained within BW_{EUT}
$2BW_{Inc} < BW_{EUT} \leq 4BW_{Inc}$	Twice. Incumbent transmission is contained within BW_{EUT}	Incumbent transmission is located as closely as possible to the lower edge and upper edge, respectively, of the EUT channel
$BW_{EUT} > 4BW_{Inc}$	Three times	Incumbent transmission is located as closely as possible to the lower edge of the EUT channel, in the middle of EUT channel, and as closely as possible to the upper edge of the EUT channel


where:

BW_{EUT} : Transmission bandwidth of EUT signal

BW_{Inc} : Transmission bandwidth of the simulated incumbent signal (10 MHz wide AWGN signal)

f_{c1} : Center frequency of EUT transmission

f_{c2} : Center frequency of simulated incumbent signal

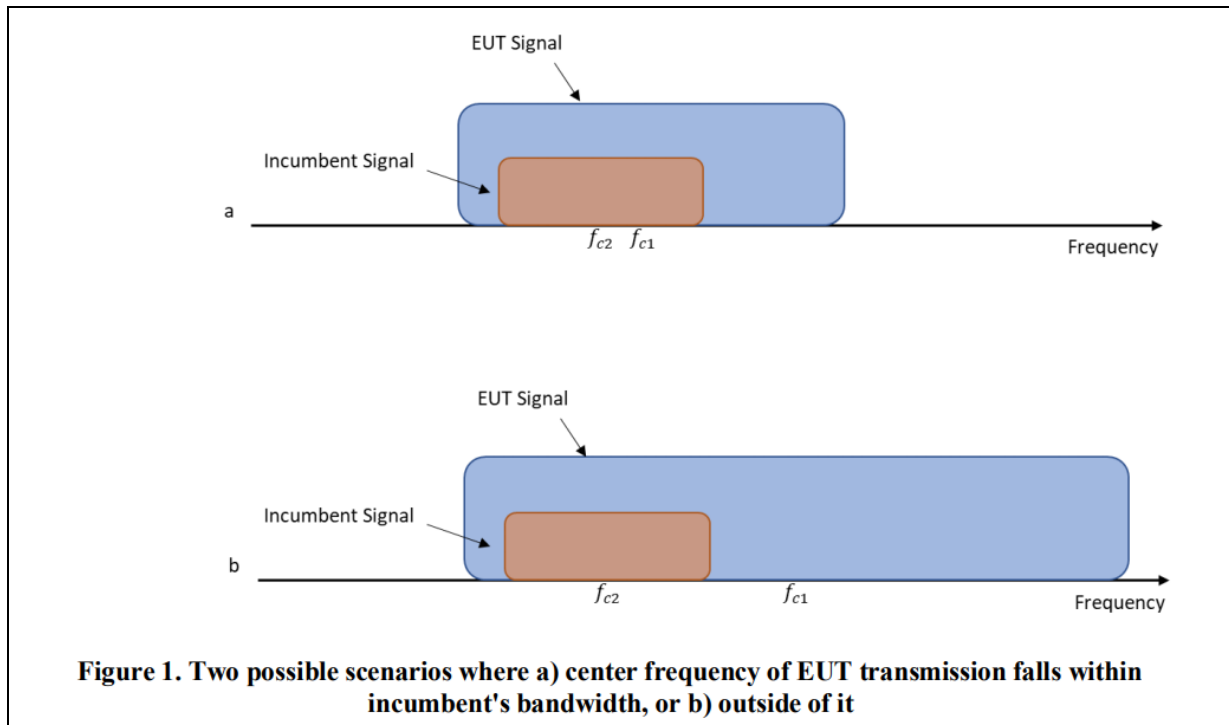

3.5.2 Measuring Instruments

See list of measuring equipment of this test report.


3.5.3 Test Procedures

1. To ensure EUT reliably detects an incumbent signal in both scenarios shown in Figure 1, the detection threshold test may be repeated more than once with the incumbent signal (having center frequency f_{c2}) tuned to different center frequencies within the UT transmission bandwidth. The criteria specified in Table 1 determines how many times the detection threshold test must be performed
2. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
3. Monitor the signal analyzer to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
4. (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
5. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 2, choose a different center

frequency for the AWGN signal and repeat the process.

6. EUT was driven in MIMO mode, the interferer signal was injected to both chains to monitor the performance, while the interferer level is determined according to the lowest antenna gain among both antennas.

3.5.4 Test Setup

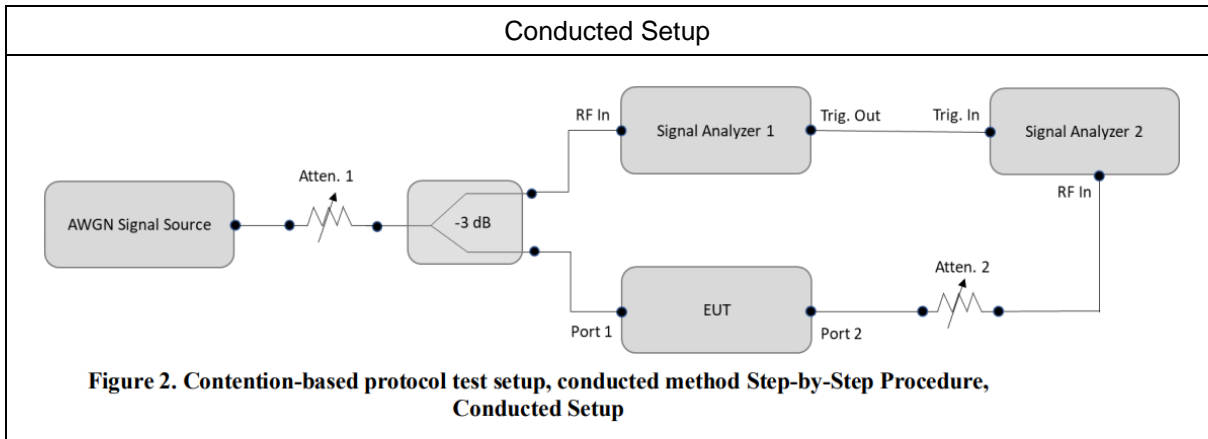

3.5.5 Support Unit used in test configuration and system

Instrument	Brand Name	Model No.	Characteristics
WLAN AP	ASUS	GT-AXE11000	Dual Band AP
Notebook	Acer	N15C1	LAN



3.5.6 Test Summary of Contention Based Protocol Test

Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)
UNII Band 5	6135	20	6135	-67.24	100	-62	-63.34	1.34
				Result: Stop Transmission				
				-68.24	<90	-62	-64.34	2.34
				Result: Minimal Operation				
				-69.24	=0	-62	-65.34	3.34
				Result: Normal Operation				
	6105	320	6110	-68.07	100	-62	-64.17	2.17
				Result: Stop Transmission				
				-69.07	<90	-62	-65.17	3.17
			Result: Minimal Operation					
			-70.07	=0	-62	-66.17	4.17	
			Result: Normal Operation					
			6265	-69.77	100	-62	-65.87	3.87
				Result: Stop Transmission				
				-70.77	<90	-62	-66.87	4.87
Result: Minimal Operation								
-71.77	=0	-62	-67.87	5.87				
Result: Normal Operation								
6420	-66.97	100	-62	-63.07	1.07			
	Result: Stop Transmission							
	-67.97	<90	-62	-64.07	2.07			
Result: Minimal Operation								
-68.97	=0	-62	-65.07	3.07				
Result: Normal Operation								

Note 1: Adjusted Power = Injected AWGN Level - minimum antenna gain (Antenna 7, gain=-3.9dBi)

Note 2: Path Loss between antenna and RF connector is negligible. (0 dB)

Note 3: Margin = Regulated Threshold level - Adjusted Power



Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)
UNII Band 6	6455	20	6455	-68.83	100	-62	-63.33	1.33
				Result: Stop Transmission				
				-69.83	<90	-62	-64.33	2.33
				Result: Minimal Operation				
				-70.83	=0	-62	-65.33	3.33
				Result: Normal Operation				
UNII Band 5/6/7	6425	320	6270 (worst)	-68.90	100	-62	-62.30	0.30
				Result: Stop Transmission				
				-69.90	<90	-62	-63.30	1.30
				Result: Minimal Operation				
				-70.90	=0	-62	-64.30	2.30
				Result: Normal Operation				
			6425	-70.97	100	-62	-64.37	2.37
				Result: Stop Transmission				
				-71.97	<90	-62	-65.37	3.37
			Result: Minimal Operation					
			-72.97	=0	-62	-66.37	4.37	
			Result: Normal Operation					
			6580	-69.85	100	-62	-63.25	1.25
				Result: Stop Transmission				
				-70.85	<90	-62	-64.25	2.25
Result: Minimal Operation								
-71.85	=0	-62	-65.25	3.25				
Result: Normal Operation								

Note 1: Adjusted Power = Injected AWGN Level - minimum antenna gain (Antenna 5, gain=-5.5dBi) for 20M;
Adjusted Power = Injected AWGN Level - minimum antenna gain (Antenna 5, gain=-6.6dBi) for 320M;

Note 2: Path Loss between antenna and RF connector is negligible. (0 dB)

Note 3: Margin = Regulated Threshold level - Adjusted Power



Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)
UNII Band 7	6695	20	6695	-72.08	100	-62	-65.48	3.48
				Result: Stop Transmission				
				-73.08	<90	-62	-66.48	4.48
				Result: Minimal Operation				
				-74.08	=0	-62	-67.48	5.48
				Result: Normal Operation				
UNII Band 7(8)	6745	320	6590	-71.97	100	-62	-65.37	3.37
				Result: Stop Transmission				
				-72.97	<90	-62	-66.37	4.37
				Result: Minimal Operation				
				-73.97	=0	-62	-67.37	5.37
				Result: Normal Operation				
			6745	-73.80	100	-62	-67.20	5.20
				Result: Stop Transmission				
				-74.80	<90	-62	-68.20	6.20
				Result: Minimal Operation				
				-75.80	=0	-62	-69.20	7.20
				Result: Normal Operation				
6900	-69.76	100	-62	-63.16	1.16			
	Result: Stop Transmission							
	-70.76	<90	-62	-64.16	2.16			
	Result: Minimal Operation							
	-71.76	=0	-62	-65.16	3.16			
	Result: Normal Operation							

Note 1: Adjusted Power = Injected AWGN Level - minimum antenna gain (Antenna 5, gain=-6.6dBi)

Note 2: Path Loss between antenna and RF connector is negligible. (0 dB)

Note 3: Margin = Regulated Threshold level - Adjusted Power



Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)
UNII Band 8	7015	20	7015	-73.07	100	-62	-66.86	4.86
				Result: Stop Transmission				
				-74.07	<90	-62	-67.86	5.86
				Result: Minimal Operation				
				-75.07	=0	-62	-68.86	6.86
				Result: Normal Operation				
UNII Band 8(7)	6745	320	6590	-71.97	100.00	-62.00	-65.37	3.37
				Result: Stop Transmission				
				-72.97	<90	-62.00	-66.37	4.37
				Result: Minimal Operation				
				-73.97	=0	-62.00	-67.37	5.37
				Result: Normal Operation				
			6745	-73.80	100.00	-62.00	-67.20	5.20
				Result: Stop Transmission				
				-74.80	<90	-62.00	-68.20	6.20
			Result: Minimal Operation					
			-75.80	=0	-62.00	-69.20	7.20	
			Result: Normal Operation					
			6900	-69.76	100.00	-62.00	-63.16	1.16
				Result: Stop Transmission				
				-70.76	<90	-62.00	-64.16	2.16
Result: Minimal Operation								
-71.76	=0	-62.00	-65.16	3.16				
Result: Normal Operation								

Note 1: Adjusted Power = Injected AWGN Level - minimum antenna gain (Antenna 5, gain=-6.6dBi) for 320M;

Adjusted Power = Injected AWGN Level - minimum antenna gain (Antenna 7, gain=-6.21dBi) for 20M;


Note 2: Path Loss between antenna and RF connector is negligible. (0 dB)

Note 3: Margin = Regulated Threshold level - Adjusted Power



3.5.7 Worst Case Plots of Contention Based Protocol

Contention Based Protocol Result Plots on U-NII 5 (AWGN Interference)

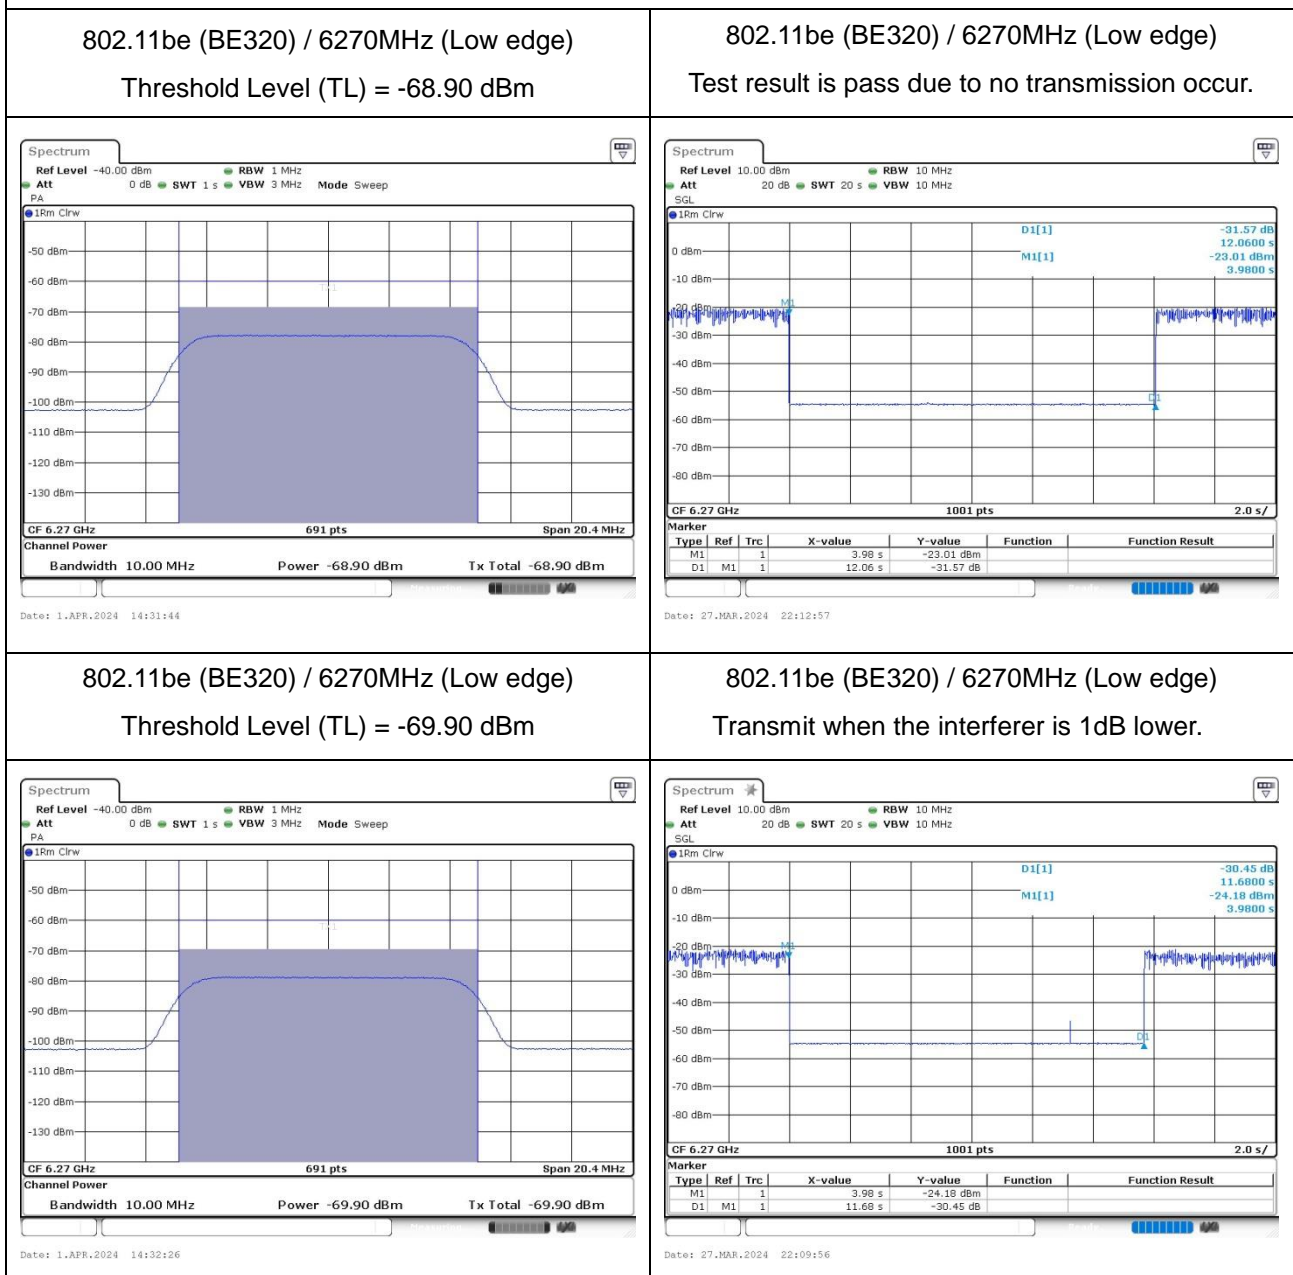


Remark: M1: Injection of AWGN signal, D1: Removal of AWGN signal



3.5.8 Verify Contention Based Protocol Transmission Bandwidth

Verify transmission absence when Incumbent signal at different frequency (frequency domain plots).

1. When Incumbent Signal inject at lowest frequency, the transmission bandwidth reduced to 160MHz;
2. When Incumbent Signal inject at middle frequency, the whole 320MHz bandwidth stop transmission;
3. When Incumbent Signal inject at highest frequency, the whole 320MHz bandwidth stop transmission;
4. This device does not support channel puncturing mode for incumbent avoidance but bandwidth reduction mechanism is supported.

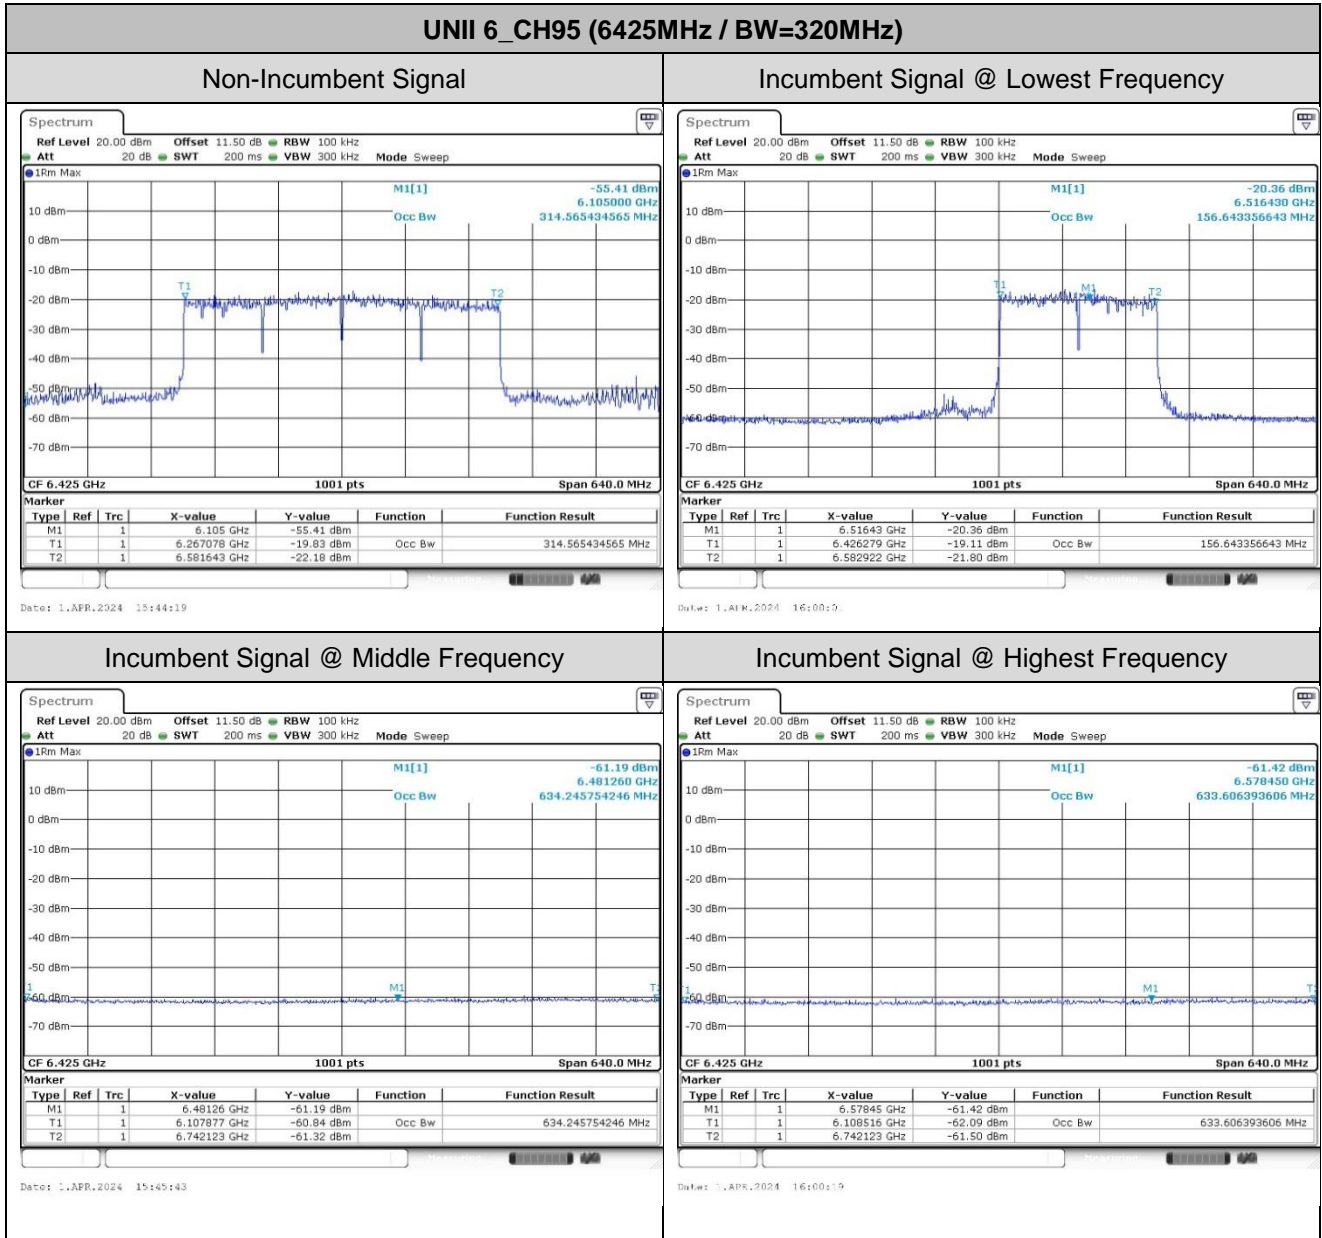

3.6 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.6.1 Limit of Unwanted Emissions

- (1) For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27 (RMS)	68.2
- 7 (Peak)	88.2

Unwanted emissions outside of restricted bands are measured with a RMS detector.

In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000 \sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

3.6.2 Measuring Instruments

See list of measuring equipment of this test report.




3.6.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW \geq 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.6.4 Test Setup


For radiated emissions below 30MHz

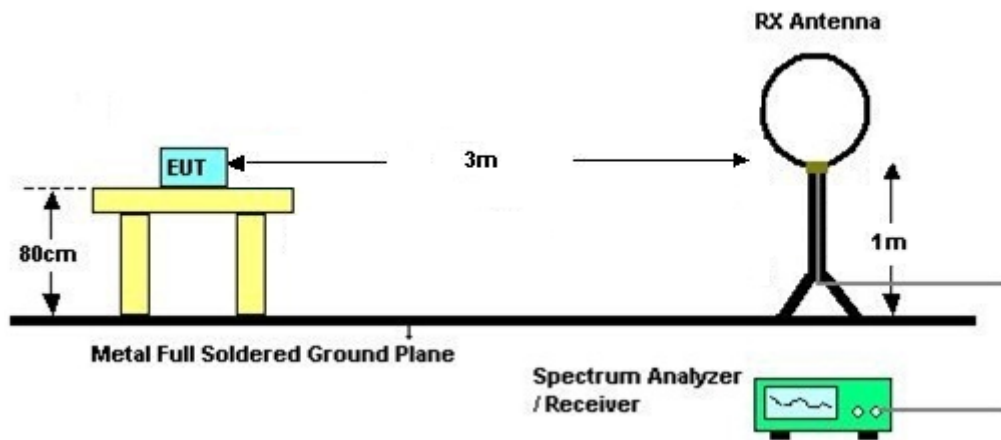

For radiated emissions from 30MHz to 1GHz

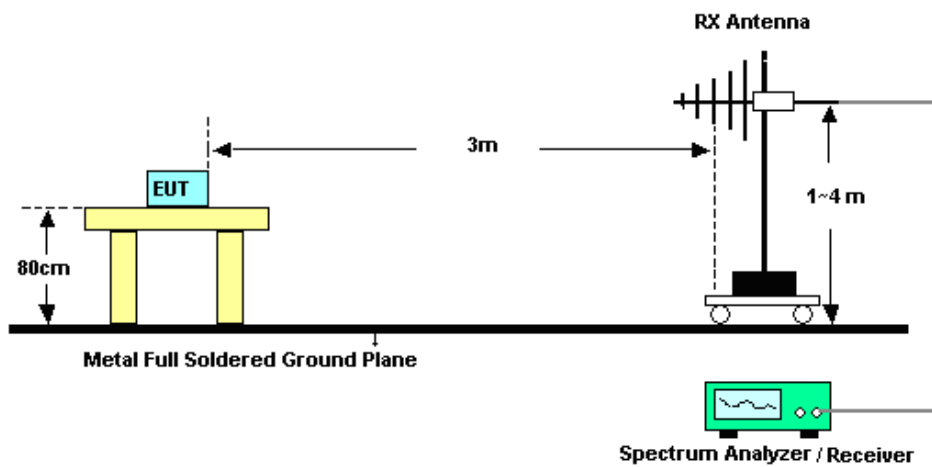

For radiated emissions above 1GHz

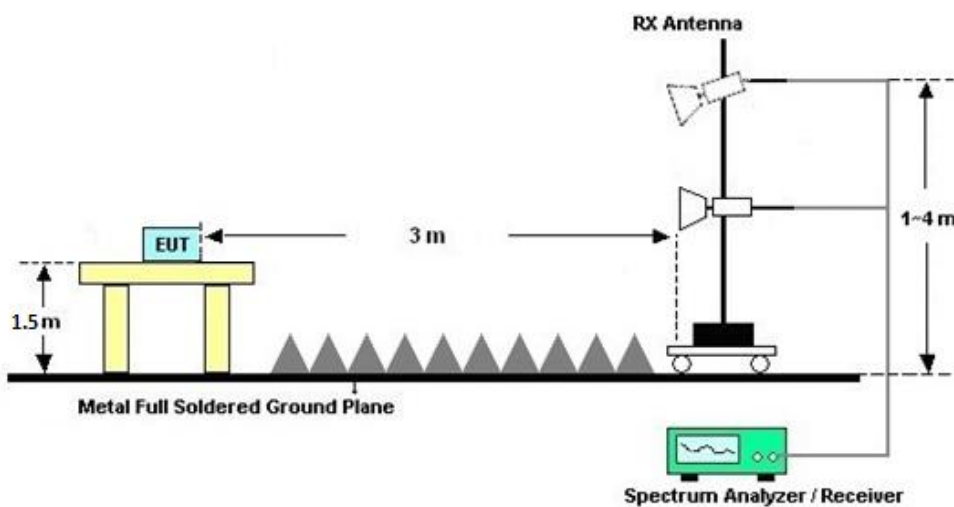



3.6.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.6.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.6.7 Duty Cycle

Please refer to Appendix D.

3.6.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

The emission level above 18GHz is checked that the emission level is noise floor only, so it is not reflected in the report.

3.7 AC Conducted Emission Measurement

3.7.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.7.2 Measuring Instruments

See list of measuring equipment of this test report.

3.7.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.7.4 Test Setup

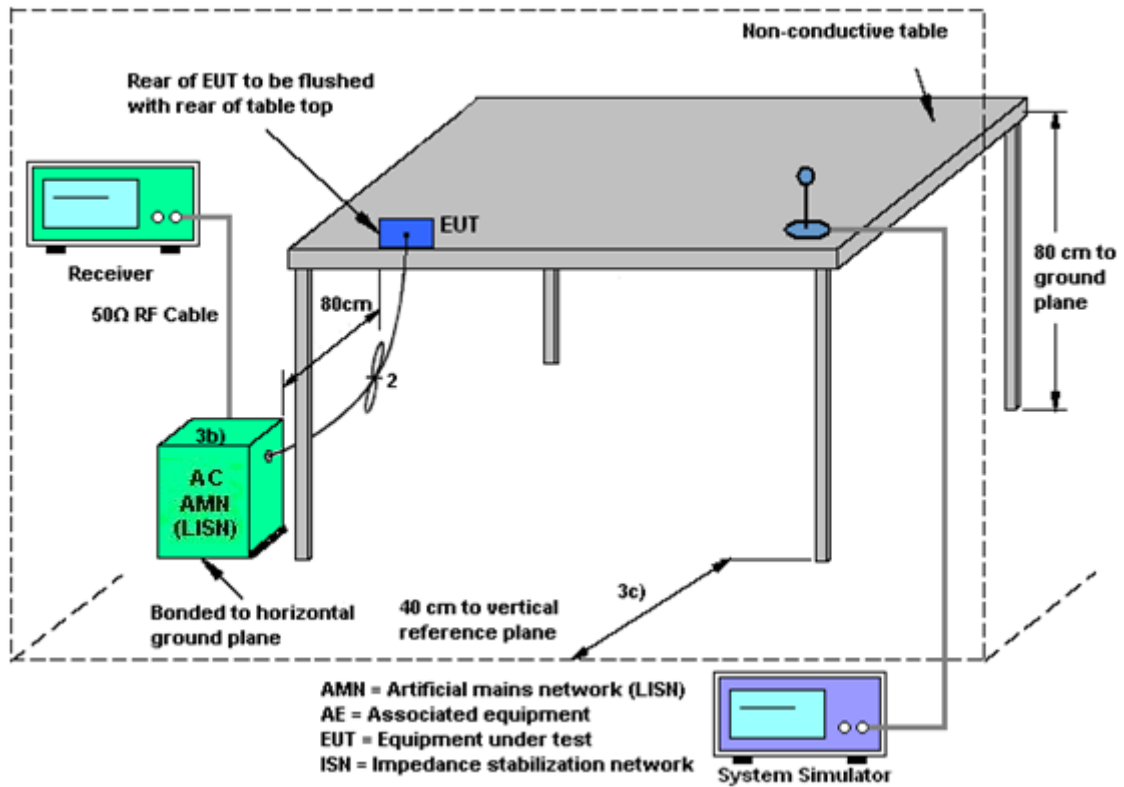

3.7.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.8 Antenna Requirements

3.8.1 Standard Applicable

§15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.8.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used. The EUT complies with the requirement of 15.203.

3.8.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

For power, the directional gain G_{ANT} is set equal to the antenna having the highest gain, i.e.,

Directional gain = G_{ANT MAX}(Ant.1 Gain, Ant.2 Gain,...) + Array Gain, as following table for Power, where Array Gain = 0 dB (i.e., no array gain) for N_{ANT} ≤ 4;

For PSD, the directional gain calculation is following,

Directional gain = 10 log[(10^{G₁/20} + 10^{G₂/20} + ... + 10^{G_n/20})² / N_{ANT}] dBi, as following table for PSD.

N_{ANT} = number of transmit antennas

N_{SS} = number of spatial streams. (The worst case directional gain will occur when N_{SS} = 1)

<CDD Modes>				
			DG for Power (dBi)	DG for PSD (dBi)
	Ant. 7 (dBi)	Ant. 5 (dBi)		
UNII-5	-3.90	-3.70	-3.70	-0.79
UNII-6	-4.70	-5.50	-4.70	-2.08
UNII-7	-5.10	-6.60	-5.10	-2.81
UNII-8	-6.21	-5.30	-5.30	-2.73



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 06, 2023	Mar. 02, 2024~ Jun. 13, 2024	Apr. 05, 2024	Conducted (TH01-SZ)
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 05, 2024		Apr. 04, 2025	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 29, 2023	Mar. 02, 2024~ Jun. 13, 2024	Dec. 28, 2024	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Aug. 21, 2023	Mar. 02, 2024~ Jun. 13, 2024	Aug. 20, 2024	Conducted (TH01-SZ)
EMI Test Receiver	R&S	ESR7	101404	9kHz~7GHz	Oct. 18, 2023	Feb. 29, 2024~ Mar. 27, 2024	Oct. 17, 2024	Radiation (03CH04-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 07, 2023	Feb. 29, 2024~ Mar. 27, 2024	Jul. 06, 2024	Radiation (03CH04-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jun. 28, 2022	Feb. 29, 2024~ Mar. 27, 2024	Jun. 27, 2024	Radiation (03CH04-SZ)
Bilog Antenna	TeseQ	CBL6111D	41909	30MHz~1GHz	May 14, 2023	Feb. 29, 2024~ Mar. 27, 2024	May 13, 2024	Radiation (03CH04-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1474	1GHz~18GHz	Jul. 07, 2023	Feb. 29, 2024~ Mar. 27, 2024	Jul. 06, 2024	Radiation (03CH04-SZ)
Horn Antenna	SCHWARZBECK	BBHA9170	9170#679	15GHz~40GHz	Jul. 08, 2023	Feb. 29, 2024~ Mar. 27, 2024	Jul. 07, 2024	Radiation (03CH04-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz~3000MHz	Oct. 18, 2023	Feb. 29, 2024~ Mar. 27, 2024	Oct. 17, 2024	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P-R	1943528	1GHz~18GHz	Oct. 18, 2023	Feb. 29, 2024~ Mar. 27, 2024	Oct. 17, 2024	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 07, 2023	Feb. 29, 2024~ Mar. 27, 2024	Jul. 06, 2024	Radiation (03CH04-SZ)
Amplifier	Agilent Technologies	83017A	MY57280136	500MHz~26.5GHz	Aug. 21, 2023	Feb. 29, 2024~ Mar. 27, 2024	Aug. 20, 2024	Radiation (03CH04-SZ)
AC Power Source	APC	AFV-S-600B	F119050019	N/A	Oct. 18, 2023	Feb. 29, 2024~ Mar. 27, 2024	Oct. 17, 2024	Radiation (03CH04-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Feb. 29, 2024~ Mar. 27, 2024	NCR	Radiation (03CH04-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Feb. 29, 2024~ Mar. 27, 2024	NCR	Radiation (03CH04-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Jul. 06, 2023	Feb. 19, 2024	Jul. 05, 2024	Conduction (CO01-SZ)
AC LISN	R&S	ENV216	100063	9kHz~30MHz	Aug. 21, 2023	Feb. 19, 2024	Aug. 20, 2024	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 16, 2023	Feb. 19, 2024	Oct. 15, 2024	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Jul. 07, 2023	Feb. 19, 2024	Jul. 06, 2024	Conduction (CO01-SZ)
Signal Analyzer	R&S	FSV7	101473	10Hz~7GHz	Dec. 28, 2023	Apr. 01, 2024	Dec. 27, 2024	Conducted (DFS01-SZ)
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY56200424	9kHz~6GHz	Apr. 04, 2023	Apr. 01, 2024	Apr. 03, 2024	Conducted (DFS01-SZ)

NCR: No Calibration Required.



5 Measurement Uncertainty

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
Conducted Power Spectral Density	±1.32 dB
Frequency	±1.3 Hz
Conducted Generated signal Levels	±0.62 dB
Conducted Time	0.38%

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.7 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1 dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.8 dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1 dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

A1. Conducted Test Results

Test Engineer:	Ma Jie	Temperature:	21~25	°C
Test Date:	2024/03/02-2024/03/19	Relative Humidity:	51~54	%

TEST RESULTS DATA
EIRP Power Table

UNII-5 MIMO															
Mod.	Data Rate	NTX	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
				Ant 7	Ant 5	Ant 7	Ant 5	SUM	Ant 7	Ant 5				SUM	Ant 7
11a	6Mbps	2	5955	0.04	0.04	6.80	7.34	10.09	-3.70		6.39	24.00	Pass	7.5	
11a	6Mbps	2	5935	0.04	0.04	5.71	6.32	9.04	-3.70		5.34	24.00	Pass	6.5	
11a	6Mbps	2	6175	0.04	0.04	6.84	7.38	10.13	-3.70		6.43	24.00	Pass	7.5	
11a	6Mbps	2	6415	0.04	0.04	7.28	7.41	10.36	-3.70		6.66	24.00	Pass	7.5	

TEST RESULTS DATA
EIRP Power Table

UNII-6 MIMO													
Mod.	Data Rate	NTX	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
				Ant 7	Ant 5	Ant 7	Ant 5	SUM	Ant 7	Ant 5			
11a	6Mbps	2	6435	0.04	0.04	8.74	8.97	11.87	-4.70		7.17	24.00	Pass
11a	6Mbps	2	6475	0.04	0.04	8.71	8.97	11.85	-4.70		7.15	24.00	Pass
11a	6Mbps	2	6515	0.04	0.04	8.72	8.75	11.75	-4.70		7.05	24.00	Pass

Power Setting	
Ant 7	Ant 5
9	
9	
9	

TEST RESULTS DATA
EIRP Power Table

UNII-7 MIMO													
Mod.	Data Rate	NTX	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
				Ant 7	Ant 5	Ant 7	Ant 5	SUM	Ant 7	Ant 5			
11a	6Mbps	2	6535	0.04	0.04	9.32	9.13	12.24	-5.10	-5.10	7.14	24.00	Pass
11a	6Mbps	2	6695	0.04	0.04	9.59	9.46	12.54	-5.10	-5.10	7.44	24.00	Pass
11a	6Mbps	2	6855	0.04	0.04	9.50	9.51	12.52	-5.10	-5.10	7.42	24.00	Pass

Power Setting	
Ant 7	Ant 5
9.5	
10	
10	

TEST RESULTS DATA
EIRP Power Table

UNII-8 MIMO															
Mod.	Data Rate	NTX	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
				Ant 7	Ant 5	Ant 7	Ant 5	SUM	Ant 7	Ant 5				SUM	Ant 7
11a	6Mbps	2	6875	0.04	0.04	9.06	9.19	12.14	-5.10		7.04	24.00	Pass		9.5
11a	6Mbps	2	6895	0.04	0.04	9.70	9.55	12.64	-5.30		7.34	24.00	Pass		10
11a	6Mbps	2	6995	0.04	0.04	9.56	9.52	12.55	-5.30		7.25	24.00	Pass		10
11a	6Mbps	2	7095	0.04	0.04	10.48	10.88	13.70	-5.30		8.40	24.00	Pass		11
11a	6Mbps	2	7115	0.04	0.04	7.14	7.50	10.34	-5.30		5.04	24.00	Pass		7.5

TEST RESULTS DATA
EIRP Power Table

UNII-5 MIMO																
Mod.	Data Rate	NTX	Freq. (MHz)	RU Config	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 7	Ant 5	Ant 7	Ant 5	SUM	Ant 7	Ant 5				SUM	Ant 7
HE20	MCS0	2	5955	Full	0.02	0.02	7.89	7.99	10.95	-3.70	-3.70	7.25	24.00	Pass	8	8
HE20	MCS0	2	5955	26/0	0.02	0.02	-3.88	-1.89	0.23	-3.70	-3.70	-3.47	24.00	Pass	-3	-3
HE20	MCS0	2	5955	52/37	0.02	0.02	-0.64	1.10	3.32	-3.70	-3.70	-0.38	24.00	Pass	0	0
HE20	MCS0	2	5955	106/53	0.02	0.02	3.51	3.81	6.67	-3.70	-3.70	2.97	24.00	Pass	4	4
HE20	MCS0	2	5935	Full	0.02	0.02	-6.78	-5.10	-2.85	-3.70	-3.70	-6.55	24.00	Pass	-6	-6
HE20	MCS0	2	5935	26/0	0.02	0.02	-17.45	-15.48	-13.35	-3.70	-3.70	-17.05	24.00	Pass	-16.5	-16.5
HE20	MCS0	2	5935	52/37	0.02	0.02	-14.86	-12.31	-10.39	-3.70	-3.70	-14.09	24.00	Pass	-13.5	-13.5
HE20	MCS0	2	5935	106/53	0.02	0.02	-11.36	-9.53	-7.34	-3.70	-3.70	-11.04	24.00	Pass	-10.5	-10.5
HE20	MCS0	2	6175	Full	0.02	0.02	7.55	8.01	10.79	-3.70	-3.70	7.09	24.00	Pass	8	8
HE20	MCS0	2	6415	Full	0.02	0.02	7.89	8.23	11.07	-3.70	-3.70	7.37	24.00	Pass	8	8
HE40	MCS0	2	5965	Full	0.02	0.01	10.77	11.14	13.97	-3.70	-3.70	10.27	24.00	Pass	10.5	10.5
HE40	MCS0	2	6165	Full	0.02	0.01	10.65	11.23	13.96	-3.70	-3.70	10.26	24.00	Pass	10.5	10.5
HE40	MCS0	2	6405	Full	0.02	0.01	10.92	11.05	13.99	-3.70	-3.70	10.29	24.00	Pass	10.5	10.5
HE80	MCS0	2	5985	Full	0.02	0.02	11.02	10.94	13.99	-3.70	-3.70	10.29	24.00	Pass	10.5	10.5
HE80	MCS0	2	6145	Full	0.02	0.02	10.22	10.80	13.53	-3.70	-3.70	9.83	24.00	Pass	10.5	10.5
HE80	MCS0	2	6385	Full	0.02	0.02	11.08	10.83	13.96	-3.70	-3.70	10.26	24.00	Pass	10.5	10.5
HE160	MCS0	2	6025	Full	0.01	0.02	11.30	11.29	14.31	-3.70	-3.70	10.61	24.00	Pass	10.5	10.5
HE160	MCS0	2	6185	Full	0.01	0.02	11.10	11.20	14.16	-3.70	-3.70	10.46	24.00	Pass	10.5	10.5
HE160	MCS0	2	6345	Full	0.01	0.02	11.25	11.12	14.20	-3.70	-3.70	10.50	24.00	Pass	10.5	10.5

TEST RESULTS DATA
EIRP Power Table

UNII-6 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 7	Ant 5	Ant 7	Ant 5	SUM	Ant 7	Ant 5				SUM	Ant 7
HE20	MCS0	2	097	6435	Full	0.02	0.02	9.52	9.53	12.53	-4.70		7.83	24.00	Pass	9.5	
HE20	MCS0	2	097	6435	26/0	0.02	0.02	-2.14	0.38	2.31	-4.70		-2.39	24.00	Pass	-0.5	
HE20	MCS0	2	097	6435	52/37	0.02	0.02	1.80	2.22	5.02	-4.70		0.32	24.00	Pass	2.5	
HE20	MCS0	2	097	6435	106/53	0.02	0.02	5.43	5.46	8.45	-4.70		3.75	24.00	Pass	5.5	
HE20	MCS0	2	105	6475	Full	0.02	0.02	9.43	9.62	12.53	-4.70		7.83	24.00	Pass	9.5	
HE20	MCS0	2	113	6515	Full	0.02	0.02	9.35	9.49	12.43	-4.70		7.73	24.00	Pass	9.5	
HE40	MCS0	2	099	6445	Full	0.02	0.01	11.10	11.00	14.06	-4.70		9.36	24.00	Pass	10.5	
HE40	MCS0	2	107	6485	Full	0.02	0.01	10.98	11.03	14.01	-4.70		9.31	24.00	Pass	10.5	
HE40	MCS0	2	115	6525	Full	0.02	0.01	10.95	10.86	13.91	-4.70		9.21	24.00	Pass	10.5	
HE80	MCS0	2	103	6465	Full	0.02	0.02	11.05	11.02	14.04	-4.70		9.34	24.00	Pass	10.5	
HE80	MCS0	2	119	6545	Full	0.02	0.02	10.98	10.94	13.97	-4.70		9.27	24.00	Pass	10.5	
HE160	MCS0	2	111	6505	Full	0.01	0.02	11.24	11.35	14.31	-4.70		9.61	24.00	Pass	10.5	

TEST RESULTS DATA
EIRP Power Table

UNII-7 MIMO																
Mod.	Data Rate	NTX	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 7	Ant 5	Ant 7	Ant 5	SUM	Ant 7	Ant 5	SUM			Ant 7	Ant 5
HE20	MCS0	2	6535	Full	0.02	0.02	9.99	9.88	12.94	-5.10	-5.10	7.84	24.00	Pass	10	10
HE20	MCS0	2	6535	26/0	0.02	0.02	-1.69	0.61	2.62	-5.10	-5.10	-2.48	24.00	Pass	-0.5	-0.5
HE20	MCS0	2	6535	52/37	0.02	0.02	2.25	2.44	5.35	-5.10	-5.10	0.25	24.00	Pass	3	3
HE20	MCS0	2	6535	106/53	0.02	0.02	5.67	6.16	8.93	-5.10	-5.10	3.83	24.00	Pass	6	6
HE20	MCS0	2	6695	Full	0.02	0.02	10.28	10.16	13.23	-5.10	-5.10	8.13	24.00	Pass	10.5	10.5
HE20	MCS0	2	6855	Full	0.02	0.02	10.15	10.20	13.18	-5.10	-5.10	8.08	24.00	Pass	10.5	10.5
HE40	MCS0	2	6565	Full	0.02	0.01	10.92	10.96	13.95	-5.10	-5.10	8.85	24.00	Pass	10.5	10.5
HE40	MCS0	2	6685	Full	0.02	0.01	10.78	10.87	13.83	-5.10	-5.10	8.73	24.00	Pass	10.5	10.5
HE40	MCS0	2	6845	Full	0.02	0.01	11.11	10.85	13.99	-5.10	-5.10	8.89	24.00	Pass	10.5	10.5
HE80	MCS0	2	6625	Full	0.02	0.02	10.93	11.13	14.04	-5.10	-5.10	8.94	24.00	Pass	10.5	10.5
HE80	MCS0	2	6705	Full	0.02	0.02	11.05	10.87	13.97	-5.10	-5.10	8.87	24.00	Pass	10.5	10.5
HE80	MCS0	2	6785	Full	0.02	0.02	11.00	10.88	13.95	-5.10	-5.10	8.85	24.00	Pass	10.5	10.5
HE80	MCS0	2	6865	Full	0.02	0.02	11.01	10.96	13.99	-5.10	-5.10	8.89	24.00	Pass	10.5	10.5
HE160	MCS0	2	6665	Full	0.01	0.02	11.15	11.21	14.19	-5.10	-5.10	9.09	24.00	Pass	10.5	10.5
HE160	MCS0	2	6825	Full	0.01	0.02	11.40	11.21	14.32	-5.10	-5.10	9.22	24.00	Pass	10.5	10.5

TEST RESULTS DATA
EIRP Power Table

UNII-8 MIMO																
Mod.	Data Rate	NTX	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 7	Ant 5	Ant 7	Ant 5	SUM	Ant 7	Ant 5				SUM	Ant 7
HE20	MCS0	2	6875	Full	0.02	0.02	9.70	9.81	12.76	-5.10		7.66	24.00	Pass		10
HE20	MCS0	2	6895	Full	0.02	0.02	10.21	10.27	13.25	-5.30		7.95	24.00	Pass		10.5
HE20	MCS0	2	6995	Full	0.02	0.02	10.21	10.19	13.21	-5.30		7.91	24.00	Pass		10.5
HE20	MCS0	2	7095	Full	0.02	0.02	11.12	11.64	14.39	-5.30		9.09	24.00	Pass		11.5
HE20	MCS0	2	7095	26/8	0.02	0.02	1.03	1.01	4.03	-5.30		-1.27	24.00	Pass		1.5
HE20	MCS0	2	7095	52/40	0.02	0.02	3.83	4.00	6.92	-5.30		1.62	24.00	Pass		4
HE20	MCS0	2	7095	106/54	0.02	0.02	7.05	7.16	10.11	-5.30		4.81	24.00	Pass		7
HE20	MCS0	2	7115	Full	0.02	0.02	-2.90	-0.67	1.36	-5.30		-3.94	24.00	Pass		-2
HE20	MCS0	2	7115	26/8	0.02	0.02	-13.97	-11.32	-9.44	-5.30		-14.74	24.00	Pass		-12
HE20	MCS0	2	7115	52/40	0.02	0.02	-10.53	-8.49	-6.38	-5.30		-11.68	24.00	Pass		-9
HE20	MCS0	2	7115	106/54	0.02	0.02	-7.11	-5.06	-2.96	-5.30		-8.26	24.00	Pass		-6
HE40	MCS0	2	6885	Full	0.02	0.01	10.90	10.79	13.85	-5.10		8.75	24.00	Pass		10.5
HE40	MCS0	2	6925	Full	0.02	0.01	10.89	10.95	13.93	-5.30		8.63	24.00	Pass		10.5
HE40	MCS0	2	6965	Full	0.02	0.01	10.76	10.85	13.81	-5.30		8.51	24.00	Pass		10.5
HE40	MCS0	2	7085	Full	0.02	0.01	10.75	11.14	13.96	-5.30		8.66	24.00	Pass		10.5
HE80	MCS0	2	6945	Full	0.02	0.02	10.88	10.94	13.92	-5.30		8.62	24.00	Pass		10.5
HE80	MCS0	2	7025	Full	0.02	0.02	10.99	10.97	13.99	-5.30		8.69	24.00	Pass		10.5
HE160	MCS0	2	6985	Full	0.01	0.02	11.26	11.29	14.29	-5.30		8.99	24.00	Pass		10.5

TEST RESULTS DATA
EIRP Power Table

UNII-5 MIMO																
Mod.	Data Rate	NTX	Freq. (MHz)	RU Config	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 7	Ant 5	Ant 7	Ant 5	SUM	Ant 7	Ant 5				SUM	Ant 7
BE20	MCS0	2	5955	Full	0.02	0.02	7.60	7.87	10.74	-3.70		7.04	24.00	Pass	8	
BE20	MCS0	2	5955	26/0	0.02	0.02	-3.38	-1.68	0.56	-3.70		-3.14	24.00	Pass	-2.5	
BE20	MCS0	2	5955	52/37	0.02	0.02	-0.65	1.12	3.33	-3.70		-0.37	24.00	Pass	0	
BE20	MCS0	2	5955	106/53	0.02	0.02	3.58	3.88	6.74	-3.70		3.04	24.00	Pass	4	
BE20	MCS0	2	5935	Full	0.02	0.02	-7.33	-5.26	-3.17	-3.70		-6.87	24.00	Pass	-6.5	
BE20	MCS0	2	5935	26/0	0.02	0.02	-17.46	-15.59	-13.42	-3.70		-17.12	24.00	Pass	-16.5	
BE20	MCS0	2	5935	52/37	0.02	0.02	-14.91	-12.34	-10.43	-3.70		-14.13	24.00	Pass	-13.5	
BE20	MCS0	2	5935	106/53	0.02	0.02	-11.39	-9.29	-7.21	-3.70		-10.91	24.00	Pass	-10.5	
BE20	MCS0	2	6175	Full	0.02	0.02	7.60	7.96	10.79	-3.70		7.09	24.00	Pass	8	
BE20	MCS0	2	6415	Full	0.02	0.02	7.90	8.25	11.09	-3.70		7.39	24.00	Pass	8	
BE40	MCS0	2	5965	Full	0.01	0.02	10.49	11.10	13.81	-3.70		10.11	24.00	Pass	10.5	
BE40	MCS0	2	6165	Full	0.01	0.02	10.36	11.10	13.75	-3.70		10.05	24.00	Pass	10.5	
BE40	MCS0	2	6405	Full	0.01	0.02	10.78	10.82	13.81	-3.70		10.11	24.00	Pass	10.5	
BE80	MCS0	2	5985	Full	0.02	0.02	11.11	10.91	14.02	-3.70		10.32	24.00	Pass	10.5	
BE80	MCS0	2	6145	Full	0.02	0.02	10.78	10.96	13.88	-3.70		10.18	24.00	Pass	10.5	
BE80	MCS0	2	6385	Full	0.02	0.02	10.96	10.79	13.88	-3.70		10.18	24.00	Pass	10.5	
BE160	MCS0	2	6025	Full	0.02	0.01	10.88	10.81	13.86	-3.70		10.16	24.00	Pass	10.5	
BE160	MCS0	2	6185	Full	0.02	0.01	10.56	10.72	13.65	-3.70		9.95	24.00	Pass	10.5	
BE160	MCS0	2	6345	Full	0.02	0.01	10.64	10.69	13.68	-3.70		9.98	24.00	Pass	10.5	
BE320	MCS0	2	6105	Full	0.05	0.05	11.41	11.43	14.43	-3.70		10.73	24.00	Pass	10.5	
BE320	MCS0	2	6265	Full	0.05	0.05	11.50	11.57	14.55	-3.70		10.85	24.00	Pass	10.5	
BE320	MCS0	2	6425	Full	0.05	0.05	11.36	11.43	14.41	-3.70		10.71	24.00	Pass	10.5	

TEST RESULTS DATA
EIRP Power Table

UNII-6 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 7	Ant 5	Ant 7	Ant 5	SUM	Ant 7	Ant 5				SUM	Ant 7
BE20	MCS0	2	097	6435	Full	0.02	0.02	9.39	9.60	12.50	-4.70		7.80	24.00	Pass	9.5	
BE20	MCS0	2	097	6435	26/0	0.02	0.02	-2.11	0.40	2.33	-4.70		-2.37	24.00	Pass	-0.5	
BE20	MCS0	2	097	6435	52/37	0.02	0.02	1.81	2.16	5.00	-4.70		0.30	24.00	Pass	2.5	
BE20	MCS0	2	097	6435	106/53	0.02	0.02	5.35	5.51	8.44	-4.70		3.74	24.00	Pass	5.5	
BE20	MCS0	2	105	6475	Full	0.02	0.02	9.64	9.78	12.72	-4.70		8.02	24.00	Pass	9.5	
BE20	MCS0	2	113	6515	Full	0.02	0.02	9.35	9.43	12.40	-4.70		7.70	24.00	Pass	9.5	
BE40	MCS0	2	099	6445	Full	0.01	0.02	10.97	10.91	13.95	-4.70		9.25	24.00	Pass	10.5	
BE40	MCS0	2	107	6485	Full	0.01	0.02	10.73	10.96	13.85	-4.70		9.15	24.00	Pass	10.5	
BE40	MCS0	2	115	6525	Full	0.01	0.02	10.60	10.76	13.69	-4.70		8.99	24.00	Pass	10.5	
BE80	MCS0	2	103	6465	Full	0.02	0.02	11.13	11.24	14.19	-4.70		9.49	24.00	Pass	10.5	
BE80	MCS0	2	119	6545	Full	0.02	0.02	10.97	10.87	13.93	-4.70		9.23	24.00	Pass	10.5	
BE160	MCS0	2	111	6505	Full	0.02	0.01	10.65	10.87	13.77	-4.70		9.07	24.00	Pass	10.5	

TEST RESULTS DATA
EIRP Power Table

UNII-7 MIMO																
Mod.	Data Rate	NTX	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 7	Ant 5	Ant 7	Ant 5	SUM	Ant 7	Ant 5	SUM			Ant 7	Ant 5
BE20	MCS0	2	6535	Full	0.02	0.02	9.92	9.83	12.88	-5.10		7.78	24.00	Pass	10	
BE20	MCS0	2	6535	26/0	0.02	0.02	-1.66	0.62	2.63	-5.10		-2.47	24.00	Pass	-0.5	
BE20	MCS0	2	6535	52/37	0.02	0.02	2.21	2.46	5.34	-5.10		0.24	24.00	Pass	3	
BE20	MCS0	2	6535	106/53	0.02	0.02	5.68	6.10	8.90	-5.10		3.80	24.00	Pass	6	
BE20	MCS0	2	6695	Full	0.02	0.02	10.27	10.07	13.18	-5.10		8.08	24.00	Pass	10.5	
BE20	MCS0	2	6855	Full	0.02	0.02	10.12	10.21	13.17	-5.10		8.07	24.00	Pass	10.5	
BE40	MCS0	2	6565	Full	0.01	0.02	10.75	10.84	13.80	-5.10		8.70	24.00	Pass	10.5	
BE40	MCS0	2	6685	Full	0.01	0.02	10.65	10.64	13.65	-5.10		8.55	24.00	Pass	10.5	
BE40	MCS0	2	6845	Full	0.01	0.02	10.88	10.59	13.74	-5.10		8.64	24.00	Pass	10.5	
BE80	MCS0	2	6625	Full	0.02	0.02	11.00	11.08	14.05	-5.10		8.95	24.00	Pass	10.5	
BE80	MCS0	2	6705	Full	0.02	0.02	11.08	10.82	13.96	-5.10		8.86	24.00	Pass	10.5	
BE80	MCS0	2	6785	Full	0.02	0.02	10.96	10.80	13.89	-5.10		8.79	24.00	Pass	10.5	
BE80	MCS0	2	6865	Full	0.02	0.02	10.84	10.93	13.89	-5.10		8.79	24.00	Pass	10.5	
BE160	MCS0	2	6665	Full	0.02	0.01	10.74	10.79	13.78	-5.10		8.68	24.00	Pass	10.5	
BE160	MCS0	2	6825	Full	0.02	0.01	10.70	10.69	13.71	-5.10		8.61	24.00	Pass	10.5	
BE320	MCS0	2	6585	Full	0.05	0.05	11.34	11.47	14.42	-4.70		9.72	24.00	Pass	10.5	
BE320	MCS0	2	6745	Full	0.05	0.05	11.47	11.36	14.43	-5.10		9.33	24.00	Pass	10.5	

TEST RESULTS DATA
EIRP Power Table

UNII-8 MIMO																
Mod.	Data Rate	NTX	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 7	Ant 5	Ant 7	Ant 5	SUM	Ant 7	Ant 5				SUM	Ant 7
BE20	MCS0	2	6875	Full	0.02	0.02	9.72	9.80	12.77	-5.10		7.67	24.00	Pass		10
BE20	MCS0	2	6895	Full	0.02	0.02	10.31	10.21	13.27	-5.30		7.97	24.00	Pass		10.5
BE20	MCS0	2	6995	Full	0.02	0.02	10.25	10.24	13.25	-5.30		7.95	24.00	Pass		10.5
BE20	MCS0	2	7095	Full	0.02	0.02	11.05	11.56	14.32	-5.30		9.02	24.00	Pass		11.5
BE20	MCS0	2	7095	26/8	0.02	0.02	0.97	1.05	4.02	-5.30		-1.28	24.00	Pass		1.5
BE20	MCS0	2	7095	52/40	0.02	0.02	3.81	4.03	6.93	-5.30		1.63	24.00	Pass		4
BE20	MCS0	2	7095	106/54	0.02	0.02	7.00	7.00	10.01	-5.30		4.71	24.00	Pass		7
BE20	MCS0	2	7115	Full	0.02	0.02	-3.39	-1.14	0.89	-5.30		-4.41	24.00	Pass		-2.5
BE20	MCS0	2	7115	26/8	0.02	0.02	-14.31	-11.72	-9.82	-5.30		-15.12	24.00	Pass		-12.5
BE20	MCS0	2	7115	52/40	0.02	0.02	-11.33	-8.57	-6.73	-5.30		-12.03	24.00	Pass		-9.5
BE20	MCS0	2	7115	106/54	0.02	0.02	-7.57	-5.45	-3.38	-5.30		-8.68	24.00	Pass		-6.5
BE40	MCS0	2	6885	Full	0.01	0.02	10.80	10.65	13.73	-5.10		8.63	24.00	Pass		10.5
BE40	MCS0	2	6925	Full	0.01	0.02	10.61	10.63	13.63	-5.30		8.33	24.00	Pass		10.5
BE40	MCS0	2	6965	Full	0.01	0.02	10.53	10.57	13.56	-5.30		8.26	24.00	Pass		10.5
BE40	MCS0	2	7085	Full	0.01	0.02	10.48	10.93	13.72	-5.30		8.42	24.00	Pass		10.5
BE80	MCS0	2	6945	Full	0.02	0.02	10.83	10.91	13.88	-5.30		8.58	24.00	Pass		10.5
BE80	MCS0	2	7025	Full	0.02	0.02	10.75	10.97	13.87	-5.30		8.57	24.00	Pass		10.5
BE160	MCS0	2	6985	Full	0.02	0.01	10.80	10.57	13.70	-5.30		8.40	24.00	Pass		10.5
BE320	MCS0	2	6905	Full	0.05	0.05	11.49	11.23	14.37	-5.10		9.27	24.00	Pass		10.5



Emission Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	26dB EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A-CDD	Ant7	5935	23.60	5923.00	5946.60	≤320	PASS
	Ant5	5935	23.30	5923.30	5946.60	≤320	PASS
	Ant7	5955	23.40	5943.30	5966.70	≤320	PASS
	Ant5	5955	23.80	5943.20	5967.00	≤320	PASS
	Ant7	6175	23.50	6163.10	6186.60	≤320	PASS
	Ant5	6175	23.50	6163.20	6186.70	≤320	PASS
	Ant7	6415	23.60	6403.10	6426.70	≤320	PASS
	Ant5	6415	23.30	6403.30	6426.60	≤320	PASS
	Ant7	6435	23.40	6423.40	6446.80	≤320	PASS
	Ant5	6435	23.70	6423.00	6446.70	≤320	PASS
	Ant7	6475	23.40	6463.10	6486.50	≤320	PASS
	Ant5	6475	24.00	6462.90	6486.90	≤320	PASS
	Ant7	6515	23.70	6503.00	6526.70	≤320	PASS
	Ant5	6515	23.40	6503.30	6526.70	≤320	PASS
	Ant7	6535	23.60	6523.20	6546.80	≤320	PASS
	Ant5	6535	23.70	6523.30	6547.00	≤320	PASS
	Ant7	6695	23.40	6683.00	6706.40	≤320	PASS
	Ant5	6695	23.30	6683.40	6706.70	≤320	PASS
	Ant7	6855	23.70	6843.10	6866.80	≤320	PASS
	Ant5	6855	23.80	6843.00	6866.80	≤320	PASS
	Ant7	6875	24.00	6863.00	6887.00	≤320	PASS
	Ant5	6875	23.30	6863.20	6886.50	≤320	PASS
	Ant7	6895	23.80	6883.10	6906.90	≤320	PASS
	Ant5	6895	23.70	6883.30	6907.00	≤320	PASS
	Ant7	6995	22.60	6983.60	7006.20	≤320	PASS
	Ant5	6995	22.30	6983.50	7005.80	≤320	PASS
	Ant7	7095	23.30	7083.10	7106.40	≤320	PASS
	Ant5	7095	23.20	7083.20	7106.40	≤320	PASS
	Ant7	7115	23.60	7103.10	7126.70	≤320	PASS
	Ant5	7115	23.80	7103.00	7126.80	≤320	PASS
11AX20MIMO	Ant7	5935	22.70	5923.80	5946.50	≤320	PASS
	Ant5	5935	23.30	5923.10	5946.40	≤320	PASS
	Ant7	5955	22.40	5943.80	5966.20	≤320	PASS
	Ant5	5955	23.10	5943.60	5966.70	≤320	PASS
	Ant7	6175	23.50	6163.20	6186.70	≤320	PASS
	Ant5	6175	23.50	6163.40	6186.90	≤320	PASS
	Ant7	6415	23.30	6403.10	6426.40	≤320	PASS
	Ant5	6415	22.90	6403.50	6426.40	≤320	PASS
	Ant7	6435	22.70	6423.60	6446.30	≤320	PASS
	Ant5	6435	23.10	6423.40	6446.50	≤320	PASS
	Ant7	6475	23.40	6463.30	6486.70	≤320	PASS
	Ant5	6475	23.70	6463.30	6487.00	≤320	PASS
	Ant7	6515	23.00	6503.50	6526.50	≤320	PASS
	Ant5	6515	23.20	6503.20	6526.40	≤320	PASS



	Ant7	6535	23.50	6523.20	6546.70	≤320	PASS
	Ant5	6535	23.20	6523.40	6546.60	≤320	PASS
	Ant7	6695	23.20	6683.40	6706.60	≤320	PASS
	Ant5	6695	23.60	6683.20	6706.80	≤320	PASS
	Ant7	6855	23.60	6843.20	6866.80	≤320	PASS
	Ant5	6855	22.60	6843.60	6866.20	≤320	PASS
	Ant7	6875	22.80	6863.40	6886.20	≤320	PASS
	Ant5	6875	23.40	6863.20	6886.60	≤320	PASS
	Ant7	6895	23.00	6883.40	6906.40	≤320	PASS
	Ant5	6895	23.10	6883.30	6906.40	≤320	PASS
	Ant7	6995	21.40	6984.40	7005.80	≤320	PASS
	Ant5	6995	22.30	6983.60	7005.90	≤320	PASS
	Ant7	7095	22.90	7083.60	7106.50	≤320	PASS
	Ant5	7095	23.00	7083.60	7106.60	≤320	PASS
	Ant7	7115	23.00	7103.00	7126.00	≤320	PASS
Ant5	7115	21.90	7104.10	7126.00	≤320	PASS	
11AX40MIMO	Ant7	5965	43.60	5943.00	5986.60	≤320	PASS
	Ant5	5965	43.00	5943.60	5986.60	≤320	PASS
	Ant7	6165	44.60	6143.00	6187.60	≤320	PASS
	Ant5	6165	43.40	6143.40	6186.80	≤320	PASS
	Ant7	6405	43.80	6383.20	6427.00	≤320	PASS
	Ant5	6405	43.60	6383.00	6426.60	≤320	PASS
	Ant7	6445	43.40	6423.20	6466.60	≤320	PASS
	Ant5	6445	43.40	6423.40	6466.80	≤320	PASS
	Ant7	6485	42.60	6463.60	6506.20	≤320	PASS
	Ant5	6485	44.60	6462.60	6507.20	≤320	PASS
	Ant7	6525	43.20	6503.20	6546.40	≤320	PASS
	Ant5	6525	43.20	6503.20	6546.40	≤320	PASS
	Ant7	6565	43.40	6543.40	6586.80	≤320	PASS
	Ant5	6565	43.40	6543.60	6587.00	≤320	PASS
	Ant7	6685	44.60	6662.80	6707.40	≤320	PASS
	Ant5	6685	44.00	6663.20	6707.20	≤320	PASS
	Ant7	6845	44.80	6822.60	6867.40	≤320	PASS
	Ant5	6845	44.40	6822.80	6867.20	≤320	PASS
	Ant7	6885	43.20	6863.60	6906.80	≤320	PASS
	Ant5	6885	43.40	6863.40	6906.80	≤320	PASS
	Ant7	6925	43.40	6903.20	6946.60	≤320	PASS
	Ant5	6925	44.20	6902.60	6946.80	≤320	PASS
	Ant7	6965	44.40	6943.00	6987.40	≤320	PASS
	Ant5	6965	44.80	6942.20	6987.00	≤320	PASS
Ant7	7085	43.60	7063.20	7106.80	≤320	PASS	
Ant5	7085	44.60	7062.80	7107.40	≤320	PASS	
11AX80MIMO	Ant7	5985	87.04	5942.60	6029.64	≤320	PASS
	Ant5	5985	86.88	5941.64	6028.52	≤320	PASS
	Ant7	6145	88.32	6101.48	6189.80	≤320	PASS
	Ant5	6145	87.68	6100.84	6188.52	≤320	PASS
	Ant7	6385	87.36	6341.64	6429.00	≤320	PASS
	Ant5	6385	87.52	6341.64	6429.16	≤320	PASS
	Ant7	6465	88.16	6421.80	6509.96	≤320	PASS
	Ant5	6465	88.96	6420.36	6509.32	≤320	PASS



	Ant7	6545	86.08	6501.64	6587.72	≤320	PASS
	Ant5	6545	88.64	6500.84	6589.48	≤320	PASS
	Ant7	6625	85.60	6582.12	6667.72	≤320	PASS
	Ant5	6625	89.60	6580.20	6669.80	≤320	PASS
	Ant7	6705	88.48	6659.56	6748.04	≤320	PASS
	Ant5	6705	86.88	6661.32	6748.20	≤320	PASS
	Ant7	6785	86.56	6741.96	6828.52	≤320	PASS
	Ant5	6785	89.44	6740.68	6830.12	≤320	PASS
	Ant7	6865	89.12	6820.04	6909.16	≤320	PASS
	Ant5	6865	87.36	6820.36	6907.72	≤320	PASS
	Ant7	6945	85.12	6901.32	6986.44	≤320	PASS
	Ant5	6945	85.28	6902.92	6988.20	≤320	PASS
	Ant7	7025	82.56	6984.36	7066.92	≤320	PASS
Ant5	7025	82.24	6984.36	7066.60	≤320	PASS	
11AX160MIMO	Ant7	6025	176.00	5937.80	6113.80	≤320	PASS
	Ant5	6025	172.00	5939.40	6111.40	≤320	PASS
	Ant7	6185	176.00	6097.00	6273.00	≤320	PASS
	Ant5	6185	174.40	6098.60	6273.00	≤320	PASS
	Ant7	6345	172.00	6259.40	6431.40	≤320	PASS
	Ant5	6345	175.20	6257.80	6433.00	≤320	PASS
	Ant7	6505	173.60	6417.80	6591.40	≤320	PASS
	Ant5	6505	173.60	6418.60	6592.20	≤320	PASS
	Ant7	6665	172.80	6578.60	6751.40	≤320	PASS
	Ant5	6665	173.60	6578.60	6752.20	≤320	PASS
	Ant7	6825	173.60	6737.80	6911.40	≤320	PASS
	Ant5	6825	172.80	6738.60	6911.40	≤320	PASS
	Ant7	6985	171.20	6898.60	7069.80	≤320	PASS
Ant5	6985	172.00	6898.60	7070.60	≤320	PASS	
11BE20MIMO	Ant7	5935	22.80	5923.60	5946.40	≤320	PASS
	Ant5	5935	23.90	5923.30	5947.20	≤320	PASS
	Ant7	5955	23.80	5943.30	5967.10	≤320	PASS
	Ant5	5955	24.00	5943.20	5967.20	≤320	PASS
	Ant7	6175	23.20	6163.30	6186.50	≤320	PASS
	Ant5	6175	24.80	6162.30	6187.10	≤320	PASS
	Ant7	6415	23.30	6403.40	6426.70	≤320	PASS
	Ant5	6415	23.40	6403.30	6426.70	≤320	PASS
	Ant7	6435	23.20	6423.20	6446.40	≤320	PASS
	Ant5	6435	23.40	6423.10	6446.50	≤320	PASS
	Ant7	6475	23.30	6463.20	6486.50	≤320	PASS
	Ant5	6475	23.70	6462.90	6486.60	≤320	PASS
	Ant7	6515	23.60	6502.80	6526.40	≤320	PASS
	Ant5	6515	22.70	6503.50	6526.20	≤320	PASS
	Ant7	6535	23.60	6523.30	6546.90	≤320	PASS
	Ant5	6535	23.60	6523.30	6546.90	≤320	PASS
	Ant7	6695	23.60	6683.20	6706.80	≤320	PASS
	Ant5	6695	23.20	6683.40	6706.60	≤320	PASS
	Ant7	6855	23.30	6843.50	6866.80	≤320	PASS
	Ant5	6855	23.20	6843.30	6866.50	≤320	PASS
	Ant7	6875	23.70	6863.20	6886.90	≤320	PASS
Ant5	6875	24.00	6863.00	6887.00	≤320	PASS	



	Ant7	6895	23.20	6883.50	6906.70	≤320	PASS
	Ant5	6895	22.70	6883.60	6906.30	≤320	PASS
	Ant7	6995	23.60	6983.10	7006.70	≤320	PASS
	Ant5	6995	22.80	6983.00	7005.80	≤320	PASS
	Ant7	7095	21.90	7084.00	7105.90	≤320	PASS
	Ant5	7095	23.10	7083.20	7106.30	≤320	PASS
	Ant7	7115	23.40	7103.10	7126.50	≤320	PASS
	Ant5	7115	23.10	7103.30	7126.40	≤320	PASS
11BE40MIMO	Ant7	5965	43.20	5943.00	5986.20	≤320	PASS
	Ant5	5965	43.80	5943.00	5986.80	≤320	PASS
	Ant7	6165	43.60	6143.00	6186.60	≤320	PASS
	Ant5	6165	44.20	6143.20	6187.40	≤320	PASS
	Ant7	6405	43.20	6383.20	6426.40	≤320	PASS
	Ant5	6405	43.40	6383.20	6426.60	≤320	PASS
	Ant7	6445	43.80	6422.40	6466.20	≤320	PASS
	Ant5	6445	43.60	6422.80	6466.40	≤320	PASS
	Ant7	6485	44.20	6462.40	6506.60	≤320	PASS
	Ant5	6485	44.60	6463.00	6507.60	≤320	PASS
	Ant7	6525	44.00	6503.20	6547.20	≤320	PASS
	Ant5	6525	44.40	6503.20	6547.60	≤320	PASS
	Ant7	6565	43.20	6543.20	6586.40	≤320	PASS
	Ant5	6565	44.00	6542.40	6586.40	≤320	PASS
	Ant7	6685	43.00	6663.40	6706.40	≤320	PASS
	Ant5	6685	43.80	6663.20	6707.00	≤320	PASS
	Ant7	6845	43.80	6823.00	6866.80	≤320	PASS
	Ant5	6845	44.00	6822.80	6866.80	≤320	PASS
	Ant7	6885	43.60	6863.00	6906.60	≤320	PASS
	Ant5	6885	43.20	6863.20	6906.40	≤320	PASS
	Ant7	6925	44.40	6902.80	6947.20	≤320	PASS
	Ant5	6925	44.00	6903.00	6947.00	≤320	PASS
	Ant7	6965	44.60	6943.00	6987.60	≤320	PASS
	Ant5	6965	43.80	6942.80	6986.60	≤320	PASS
Ant7	7085	44.40	7062.40	7106.80	≤320	PASS	
Ant5	7085	44.60	7062.40	7107.00	≤320	PASS	
11BE80MIMO	Ant7	5985	86.40	5941.80	6028.20	≤320	PASS
	Ant5	5985	87.60	5941.40	6029.00	≤320	PASS
	Ant7	6145	82.80	6103.00	6185.80	≤320	PASS
	Ant5	6145	86.40	6102.60	6189.00	≤320	PASS
	Ant7	6385	88.40	6341.80	6430.20	≤320	PASS
	Ant5	6385	87.20	6342.60	6429.80	≤320	PASS
	Ant7	6465	87.60	6422.60	6510.20	≤320	PASS
	Ant5	6465	88.00	6421.80	6509.80	≤320	PASS
	Ant7	6545	84.80	6503.80	6588.60	≤320	PASS
	Ant5	6545	88.00	6501.00	6589.00	≤320	PASS
	Ant7	6625	88.80	6580.20	6669.00	≤320	PASS
	Ant5	6625	89.60	6579.80	6669.40	≤320	PASS
	Ant7	6705	86.80	6659.40	6746.20	≤320	PASS
	Ant5	6705	86.40	6662.20	6748.60	≤320	PASS
	Ant7	6785	85.60	6742.20	6827.80	≤320	PASS
	Ant5	6785	88.40	6742.20	6830.60	≤320	PASS



	Ant7	6865	92.00	6820.20	6912.20	≤320	PASS
	Ant5	6865	90.00	6820.20	6910.20	≤320	PASS
	Ant7	6945	89.20	6900.20	6989.40	≤320	PASS
	Ant5	6945	88.40	6901.00	6989.40	≤320	PASS
	Ant7	7025	88.40	6980.20	7068.60	≤320	PASS
	Ant5	7025	89.60	6979.80	7069.40	≤320	PASS
11BE160MIMO	Ant7	6025	176.00	5937.00	6113.00	≤320	PASS
	Ant5	6025	173.60	5938.60	6112.20	≤320	PASS
	Ant7	6185	173.60	6099.40	6273.00	≤320	PASS
	Ant5	6185	174.40	6097.80	6272.20	≤320	PASS
	Ant7	6345	174.40	6257.80	6432.20	≤320	PASS
	Ant5	6345	176.80	6257.80	6434.60	≤320	PASS
	Ant7	6505	177.60	6417.00	6594.60	≤320	PASS
	Ant5	6505	172.80	6419.40	6592.20	≤320	PASS
	Ant7	6665	172.00	6578.60	6750.60	≤320	PASS
	Ant5	6665	177.60	6575.40	6753.00	≤320	PASS
	Ant7	6825	173.60	6738.60	6912.20	≤320	PASS
	Ant5	6825	174.40	6737.00	6911.40	≤320	PASS
	Ant7	6985	175.20	6897.80	7073.00	≤320	PASS
	Ant5	6985	171.20	6898.60	7069.80	≤320	PASS
11BE320MIMO	Ant7	6105	339.20	5935.40	6274.60	-	-
	Ant5	6105	336.00	5937.00	6273.00	-	-
	Ant7	6265	339.20	6095.40	6434.60	-	-
	Ant5	6265	348.80	6090.60	6439.40	-	-
	Ant7	6425	339.20	6253.80	6593.00	-	-
	Ant5	6425	340.80	6255.40	6596.20	-	-
	Ant7	6585	339.20	6413.80	6753.00	-	-
	Ant5	6585	339.20	6415.40	6754.60	-	-
	Ant7	6745	339.20	6575.40	6914.60	-	-
	Ant5	6745	339.20	6575.40	6914.60	-	-
	Ant7	6905	339.20	6735.40	7074.60	-	-
	Ant5	6905	337.60	6735.40	7073.00	-	-

Note: For channels with a nominal bandwidth of 320MHz, compliance is demonstrated by way of the 99% OBW.



Test Graphs

