

# FCC RF Test Report

APPLICANT : Motorola Mobility LLC  
EQUIPMENT : Mobile Cellular Phone  
BRAND NAME : Motorola  
MODEL NAME : XT2417-1, XT2417-2, XT2417-4, XT2417D  
FCC ID : IHDT56AQ3  
STANDARD : 47 CFR Part 2, Part 27 Subpart Q  
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)  
TEST DATE(S) : Nov. 03, 2023 ~ Nov. 23, 2023

We, Sporton International Inc. (KunShan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (KunShan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



**Sporton International Inc. (Kunshan)**

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY..... 3
SUMMARY OF TEST RESULT ..... 4
1 GENERAL DESCRIPTION ..... 5
1.1 Applicant..... 5
1.2 Manufacturer..... 5
1.3 Product Feature of Equipment Under Test..... 5
1.4 Product Specification of Equipment Under Test..... 5
1.5 Modification of EUT ..... 6
1.6 Specification of Accessory..... 6
1.7 Maximum EIRP Power and Emission Designator ..... 7
1.8 Testing Site..... 8
1.9 Test Software..... 8
1.10 Applied Standards ..... 8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 9
2.1 Test Mode..... 9
2.2 Connection Diagram of Test System..... 10
2.3 Support Unit used in test configuration and system ..... 10
2.4 Measurement Results Explanation Example..... 10
2.5 Frequency List of Low/Middle/High Channels ..... 11
3 CONDUCTED TEST ITEMS ..... 12
3.1 Measuring Instruments ..... 12
3.2 Test Setup ..... 12
3.3 Test Result of Conducted Test ..... 12
3.4 Conducted Output Power Measurement ..... 13
3.5 Peak-to-Average Ratio ..... 14
3.6 EIRP ..... 15
3.7 Occupied Bandwidth..... 16
3.8 Conducted Band Edge Measurement ..... 17
3.9 Conducted Spurious Emission Measurement ..... 18
3.10 Frequency Stability Measurement..... 19
4 RADIATED TEST ITEMS ..... 20
4.1 Measuring Instruments ..... 20
4.2 Test Setup ..... 20
4.3 Test Result of Radiated Test ..... 21
4.4 Radiated Spurious Emission Measurement ..... 22
5 LIST OF MEASURING EQUIPMENT ..... 23
6 MEASUREMENT UNCERTAINTY ..... 24
APPENDIX A. TEST RESULTS OF CONDUCTED TEST
APPENDIX B. TEST RESULTS OF RADIATED TEST
APPENDIX C. TEST SETUP PHOTOGRAPHS



## REVISION HISTORY

| REPORT NO. | VERSION | DESCRIPTION             | ISSUED DATE   |
|------------|---------|-------------------------|---------------|
| FG3O1303R  | Rev. 01 | Initial issue of report | Nov. 30, 2023 |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |



### SUMMARY OF TEST RESULT

| Report Section | FCC Rule                 | Description                                  | Limit             | Result      | Remark   |
|----------------|--------------------------|--|-------------------|-------------|--|
| 3.4            | §2.1046                  | Conducted Output Power                       | —                 | Report Only | -  |
| 3.5            | §27.50 (k)(4)            | Peak-to-Average Ratio                        | <13dB             | PASS        |  |
| 3.6            | §27.50 (k)(3)            | EIRP   | EIRP < 1W (30dBm) | PASS        | -  |
| 3.7            | §2.1049                  | Occupied Bandwidth                           | —                 | Report Only | -  |
| 3.8            | §2.1051<br>§27.53 (n)(2) | Conducted Band Edge Measurement              | -13dBm/MHz        | PASS        | -  |
| 3.9            | §2.1051<br>§27.53 (n)(2) | Conducted Spurious Emission                  | -13dBm/MHz        | PASS        | -  |
| 3.10           | §2.1055<br>§27.54        | Frequency Stability<br>Temperature & Voltage | Within the band   | PASS        | -  |
| 4.4            | §2.1053<br>§27.53 (n)(2) | Radiated Spurious Emission                   | -13dBm/MHz        | PASS        | Under limit<br>20.79 dB at<br>13800.000<br>MHz |

**Conformity Assessment Condition:**

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



# 1 General Description

## 1.1 Applicant

Motorola Mobility LLC  
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.2 Manufacturer

Motorola Mobility LLC  
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.3 Product Feature of Equipment Under Test

| Product Feature |  |
|-----------------|--|
| Equipment       | Mobile Cellular Phone  |
| Brand Name      | Motorola   |
| Model Name      | XT2417-1, XT2417-2, XT2417-4, XT2417D  |
| FCC ID          | IHDT56AQ3  |
| IMEI Code       | Conducted : 354581940048052/354581940048060<br>Radiation : 350735340018255/350735340018263 |
| HW Version      | DVT2   |
| SW Version      | U1UFN34.35   |
| EUT Stage       | Identical Prototype  |

## 1.4 Product Specification of Equipment Under Test

| Product Feature    |  |
|--------------------|--|
| Tx/Rx Frequency    | 5G NR n77: 3450 MHz ~ 3550 MHz<br>5G NR n78: 3450 MHz ~ 3550 MHz   |
| SCS                | 30kHz  |
| Bandwidth          | n77/n78: 20 / 30 / 40 / 50 / 60 / 70 / 80 / 90 / 100MHz  |
| Antenna Gain       | <Ant. 1><br>5G NR n77: -0.70 dBi<br>5G NR n78: -0.70 dBi<br><Ant. 2><br>5G NR n77: -3.50 dBi<br>5G NR n78: -7.50 dBi<br><Ant. 5><br>5G NR n77: -0.80 dBi<br>5G NR n78: -0.80 dBi<br><Ant. 8><br>5G NR n77: -2.40 dBi<br>5G NR n78: -2.40 dBi |
| Type of Modulation | CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM<br>DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM  |

**Remark:**

1. The maximum EIRP is calculated from max output power and max antenna gain, only the maximum EIRP of Ant.5 for 5G NR n77/n78 is shown in the report.
2. The device supports n77/n78(1T4R) SRS resources on Antenna 1/2/5/8, only the test data of worst Antenna 3 is showed in the report according to the maximum power.
3. 5G NR n77/n78 support SA and NSA mode. The whole testing has assessed SA mode for n77 by referring to the higher conducted power for conducted test items.
4. The device supports HPUE mode for 5G NR n77/n78.
5. All the supported EN-DC combinations are verified conducted power, only the EN-DC combination with highest power are shown in the report.
6. The EN-DC mode combination could be referred to the product spec.

## 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.6 Specification of Accessory

| Accessories Information |            |                    |            |             |
|-------------------------|------------|--------------------|------------|-------------|
| AC Adapter 1            | Brand Name | Motorola(AOHAI)    | Model Name | MC-101      |
| AC Adapter 2            | Brand Name | Motorola(Salcomp)  | Model Name | MC-101      |
| AC Adapter 3            | Brand Name | Motorola(Chenyang) | Model Name | MC-101      |
| Battery 1               | Brand Name | Motorola (ATL)     | Model Name | QF50        |
| Battery 2               | Brand Name | Motorola (Sunwoda) | Model Name | QF50        |
| USB Cable 1             | Brand Name | HE XIN             | Model Name | HX-HQ-05    |
| USB Cable 2             | Brand Name | SAI BAO            | Model Name | SHQ-A174    |
| Earphone                | Brand Name | Newleader          | Model Name | EM313A-19SF |

### 1.7 Maximum EIRP Power and Emission Designator

| 5G NR n77 SA |                       | PI/2 BPSK / QPSK |                              | 16QAM/64QAM/256QAM |                              |
|--------------|-----------------------|------------------|------------------------------|--------------------|------------------------------|
| BW (MHz)     | Frequency Range (MHz) | Maximum EIRP(W)  | Emission Designator (99%OBW) | Maximum EIRP(W)    | Emission Designator (99%OBW) |
| 20           | 3460.02 ~ 3540.00     | 0.3062           | 18M2G7D                      | 0.2018             | 18M2W7D                      |
| 30           | 3465.00 ~ 3534.99     | 0.3076           | 27M9G7D                      | 0.2028             | 27M9W7D                      |
| 40           | 3470.01 ~ 3529.98     | 0.3055           | 37M9G7D                      | 0.2046             | 37M8W7D                      |
| 50           | 3475.02 ~ 3525.00     | 0.3013           | 47M5G7D                      | 0.1954             | 47M5W7D                      |
| 60           | 3480.00 ~ 3519.99     | 0.2944           | 57M7G7D                      | 0.1991             | 57M9W7D                      |
| 70           | 3485.01 ~ 3514.98     | 0.2951           | 67M6G7D                      | 0.1901             | 67M5W7D                      |
| 80           | 3490.02 ~ 3510.00     | 0.2877           | 77M4G7D                      | 0.1837             | 77M6W7D                      |
| 90           | 3495.00 ~ 3504.99     | 0.2812           | 87M5G7D                      | 0.1811             | 87M5W7D                      |
| 100          | 3500.01               | 0.3076           | 97M4G7D                      | 0.1714             | 97M7W7D                      |

| 5G NR n78 SA |                       | PI/2 BPSK / QPSK |                              | 16QAM/64QAM/256QAM |                              |
|--------------|-----------------------|------------------|------------------------------|--------------------|------------------------------|
| BW (MHz)     | Frequency Range (MHz) | Maximum EIRP(W)  | Emission Designator (99%OBW) | Maximum EIRP(W)    | Emission Designator (99%OBW) |
| 20           | 3460.02 ~ 3540.00     | 0.2965           | 18M2G7D                      | 0.1919             | 18M2W7D                      |
| 30           | 3465.00 ~ 3534.99     | 0.3020           | 27M9G7D                      | 0.1959             | 27M9W7D                      |
| 40           | 3470.01 ~ 3529.98     | 0.3020           | 37M9G7D                      | 0.1963             | 37M8W7D                      |
| 50           | 3475.02 ~ 3525.00     | 0.2773           | 47M5G7D                      | 0.1786             | 47M5W7D                      |
| 60           | 3480.00 ~ 3519.99     | 0.2917           | 57M7G7D                      | 0.1884             | 57M9W7D                      |
| 70           | 3485.01 ~ 3514.98     | 0.2871           | 67M6G7D                      | 0.1841             | 67M5W7D                      |
| 80           | 3490.02 ~ 3510.00     | 0.2748           | 77M4G7D                      | 0.1762             | 77M6W7D                      |
| 90           | 3495.00 ~ 3504.99     | 0.2735           | 87M5G7D                      | 0.1758             | 87M5W7D                      |
| 100          | 3500.01               | 0.3062           | 97M4G7D                      | 0.1667             | 97M7W7D                      |

**Note:**

- 5G NR n77 overlaps the entire frequency range of n78, and n77 power > n78 power, therefore the conducted test results of n77 provided in this report cover n78.
- All modulations have been tested, and only the worst test results of PSK & QAM are shown in the report.

### 1.8 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

|                           |  |                            |                                       |
|---------------------------|--|----------------------------|---------------------------------------|
| <b>Test Firm</b>          | Sporton International Inc. (Kunshan)   |                            |                                       |
| <b>Test Site Location</b> | No. 1098, Pengxi North Road, Kunshan Economic Development Zone<br>Jiangsu Province 215300 People's Republic of China<br>TEL : +86-512-57900158 |                            |                                       |
| <b>Test Site No.</b>      | <b>Sporton Site No.</b>  | <b>FCC Designation No.</b> | <b>FCC Test Firm Registration No.</b> |
|                           | 03CH03-KS<br>03CH04-KS<br>TH01-KS  | CN1257                     | 314309                                |

### 1.9 Test Software

| Item | Site      | Manufacture | Name                                 | Version |
|------|-----------|-------------|--------------------------------------|---------|
| 1.   | TH01-KS   | Tonscend    | JS1120-3 test system<br>China_210602 | 3.3.10  |
| 2.   | 03CH03-KS | AUDIX       | E3                                   | 210616  |
| 3.   | 03CH04-KS | AUDIX       | E3                                   | 210616  |

### 1.10 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, Part 27 Subpart Q
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 Power Meas License Digital Systems D01 v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.


Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

| Test Cases                  | Band   | Bandwidth (MHz)                              | Modulation                                | RB #                     | Test Channel |
|-----------------------------|--------|--|---|--------------------------|--------------|
|                             |        | eg. 5M, 10M, 15M, 20M                        | eg. PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM | 1RB, Partial RB, Full RB | L/M/H        |
| Max. Output Power           | 5G n77 | 20M, 30M, 40M, 50M, 60M, 70M, 80M, 90M, 100M | All Modulations                           | 1RB, Partial RB, Full RB | L, M, H      |
|                             | 5G n78 | 20M, 30M, 40M, 50M, 60M, 70M, 80M, 90M, 100M | All Modulations                           | 1RB, Partial RB, Full RB | L, M, H      |
| Peak-to-Average Ratio       | 5G n77 | 20M  | PI/2 BPSK, QPSK                           | 1RB, Full RB             | M            |
| E.I.R.P                     | 5G n77 | 20M, 30M, 40M, 50M, 60M, 70M, 80M, 90M, 100M | All Modulations                           | 1RB, Partial RB, Full RB | L, M, H      |
|                             | 5G n78 | 20M, 30M, 40M, 50M, 60M, 70M, 80M, 90M, 100M | All Modulations                           | 1RB, Partial RB, Full RB | L, M, H      |
| 26dB and 99% Bandwidth      | 5G n77 | 20M, 30M, 40M, 50M, 60M, 70M, 80M, 90M, 100M | QPSK, 16QAM, 64QAM, 256QAM                | Full RB                  | M            |
| Conducted Band Edge         | 5G n77 | 20M, 60M, 100M                               | PI/2 BPSK, QPSK                           | 1RB, Full RB             | L, H         |
| Conducted Spurious Emission | 5G n77 | 20M, 60M, 100M                               | PI/2 BPSK, QPSK                           | 1RB                      | L, M, H      |
| Frequency Stability         | 5G n77 | 20M  | QPSK                                      | Full RB                  | M            |
| Radiated Spurious Emission  | 5G n77 | Worst case from maximum power                |   |                          | M            |

**Note:**

1. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.
2. Frequency Stability: Normal Voltage = 3.91V; Low Voltage =3.4V; High Voltage =4.5V.

## 2.2 Connection Diagram of Test System

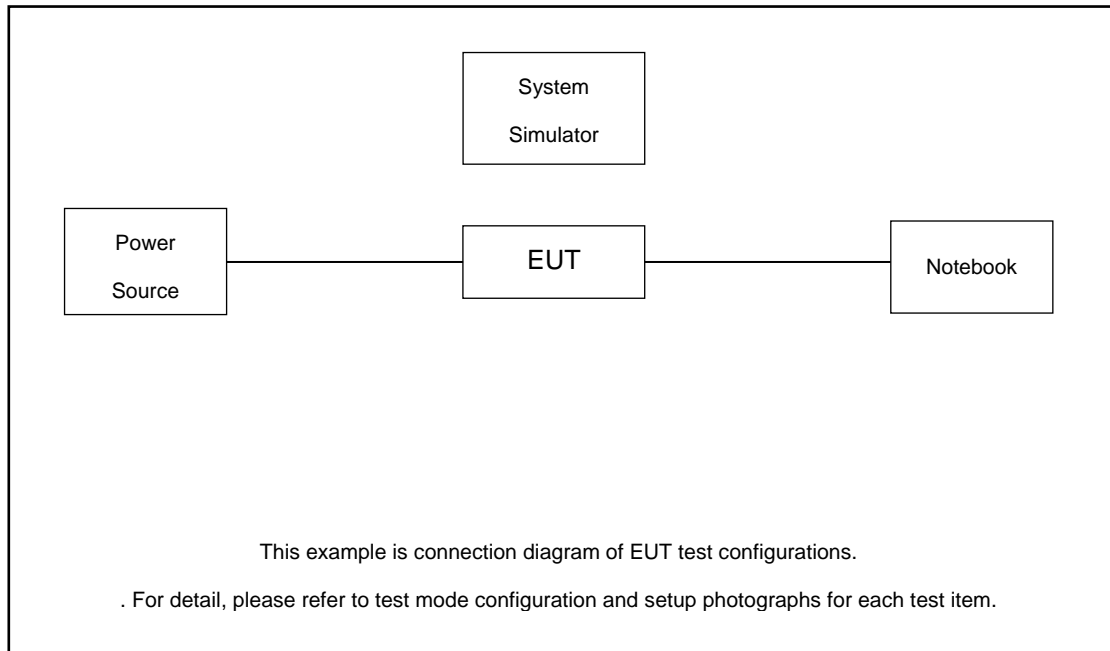

## 2.3 Support Unit used in test configuration and system

| Item | Equipment        | Trade Name | Model No. | FCC ID | Data Cable | Power Cord        |
|------|------------------|------------|-----------|--------|------------|-------------------|
| 1.   | Power Supply     | GWINSTEK   | PSS-2002  | N/A    | N/A        | Unshielded, 1.8 m |
| 2.   | LTE Base Station | Anritsu    | MT8820C   | N/A    | N/A        | Unshielded, 1.8 m |
| 3.   | NR Base Station  | Anritsu    | MT8000A   | N/A    | N/A        | Unshielded, 1.8 m |

## 2.4 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

$$\text{Offset} = \text{RF cable loss} + \text{attenuator factor}.$$

Following shows an offset computation example with cable loss 3.78 dB and 30dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 3.78 + 30 = 33.78 \text{ (dB)} \end{aligned}$$

## 2.5 Frequency List of Low/Middle/High Channels

| 5G n77/n78 Channel and Frequency List |                        |         |         |         |
|---------------------------------------|------------------------|---------|---------|---------|
| BW [MHz]                              | Channel/Frequency(MHz) | Lowest  | Middle  | Highest |
| 100                                   | Channel                | -       | 633334  | -       |
|                                       | Frequency              | -       | 3500.01 | -       |
| 90                                    | Channel                | 633000  | 633334  | 633666  |
|                                       | Frequency              | 3495    | 3500.01 | 3504.99 |
| 80                                    | Channel                | 632668  | 633334  | 634000  |
|                                       | Frequency              | 3490.02 | 3500.01 | 3510    |
| 70                                    | Channel                | 632334  | 633334  | 634332  |
|                                       | Frequency              | 3485.01 | 3500.01 | 3514.98 |
| 60                                    | Channel                | 632000  | 633334  | 634666  |
|                                       | Frequency              | 3480    | 3500.01 | 3519.99 |
| 50                                    | Channel                | 631668  | 633334  | 635000  |
|                                       | Frequency              | 3475.02 | 3500.01 | 3525    |
| 40                                    | Channel                | 631334  | 633334  | 635332  |
|                                       | Frequency              | 3470.01 | 3500.01 | 3529.98 |
| 30                                    | Channel                | 631000  | 633334  | 635666  |
|                                       | Frequency              | 3465    | 3500.01 | 3534.99 |
| 20                                    | Channel                | 630668  | 633334  | 636000  |
|                                       | Frequency              | 3460.02 | 3500.01 | 3540    |


### 3 Conducted Test Items

#### 3.1 Measuring Instruments


See list of measuring instruments of this test report.

#### 3.2 Test Setup


##### 3.2.1 Conducted Output Power

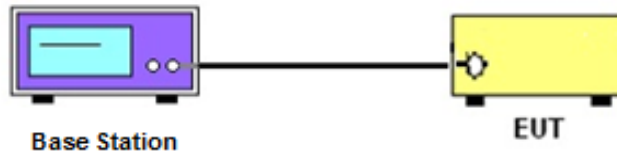

##### 3.2.2 Peak-to-Average Ratio, Occupied / 26dB Bandwidth, Band-Edge and Conducted Spurious Emission

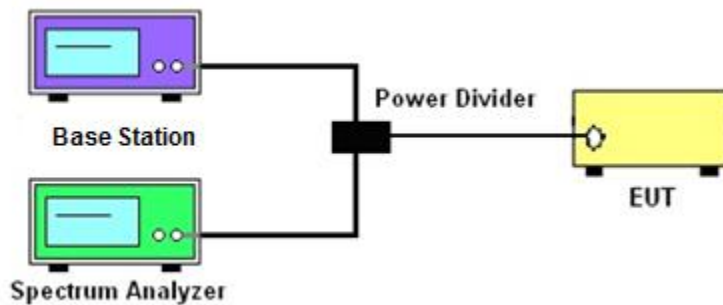

##### 3.2.3 Frequency Stability

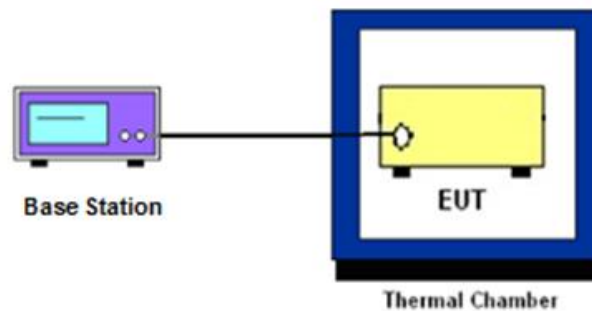

### 3.3 Test Result of Conducted Test

Please refer to Appendix A.

## **3.4 Conducted Output Power Measurement**

### **3.4.1 Description of the Conducted Output Power Measurement**

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

### **3.4.2 Test Procedures**

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

## 3.5 Peak-to-Average Ratio

### 3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### 3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

## 3.6 EIRP

### 3.6.1 Description of EIRP Limit

#### § 27.50 (k)(3)

Mobile devices are limited to 1Watt (30 dBm) EIRP. Mobile devices operating in these bands must employ a means for limiting power to the minimum necessary for successful communications

### 3.6.2 Test Procedures

1. According to KDB 412172 D01 Power Approach,
2.  $EIRP = P_T + G_T - L_C$ ,  $ERP = EIRP - 2.15$ , where  
 $P_T$  = transmitter output power in dBm  
 $G_T$  = gain of the transmitting antenna in dBi  
 $L_C$  = signal attenuation in the connecting cable between the transmitter and antenna in dB

## 3.7 Occupied Bandwidth

### 3.7.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

### 3.7.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.  
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



## 3.8 Conducted Band Edge Measurement

### 3.8.1 Description of Conducted Band Edge Measurement

#### § 27.53 (n)(2)

For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed  $-13$  dBm/MHz.

Compliance with this paragraph is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed, but limited to a maximum of 200 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.

### 3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW  $\geq$  1% EBW but limited to a maximum of 200 kHz in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz and 5 MHz removed from the band edge, set RBW  $\geq$  500KHz.
6. Beyond the 5 MHz removed from the band edge, set RBW = 1MHz.
7. Set spectrum analyzer with RMS detector.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. Checked that all the results comply with the emission limit line.

## 3.9 Conducted Spurious Emission Measurement

### 3.9.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges shall not exceed -13 dBm/MHz.

It is measured by means of a calibrated spectrum analyzer and scanned from 9 kHz up to a frequency including its 10<sup>th</sup> harmonic.

### 3.9.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.  
The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. Checked that all the results comply with the emission limit line.

## 3.10 Frequency Stability Measurement

### 3.10.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

### 3.10.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  step up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

### 3.10.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5.
2. The EUT was placed in a temperature chamber at  $20\pm 5^{\circ}\text{C}$  and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


## 4 Radiated Test Items

### 4.1 Measuring Instruments


See list of measuring instruments of this test report.

### 4.2 Test Setup


#### 4.2.1 For radiated test below 30MHz

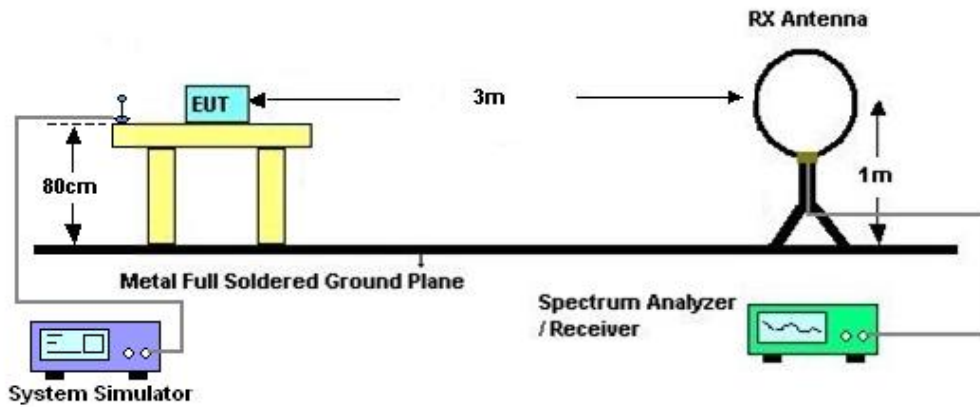

#### 4.2.2 For radiated test from 30MHz to 1GHz

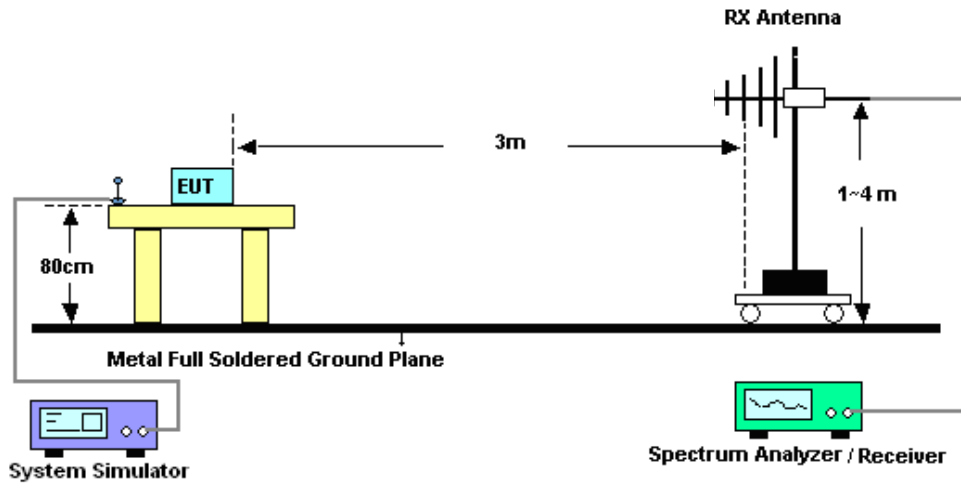

#### 4.2.3 For radiated test above 1GHz

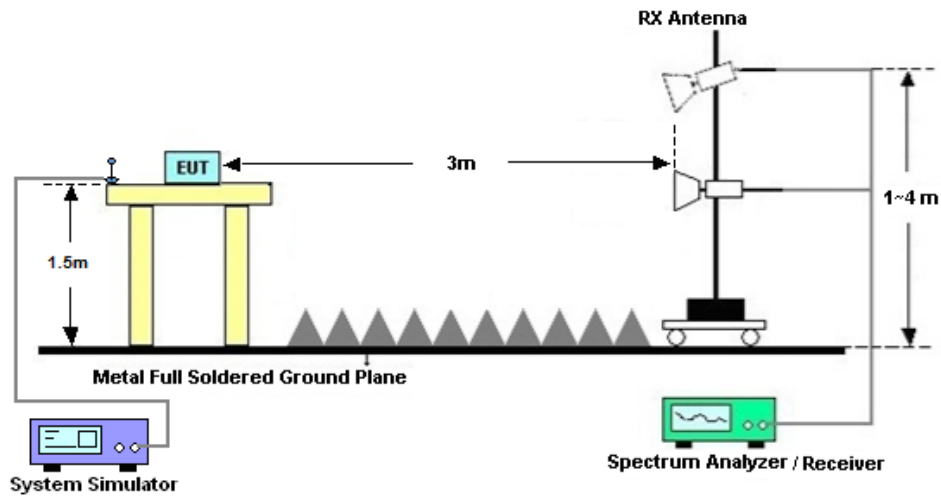

#### 4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

## 4.4 Radiated Spurious Emission Measurement

### 4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI/TIA-603-E. The power of any emission outside of the authorized operating frequency ranges shall not exceed -13 dBm/MHz.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.  
$$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$
$$\text{ERP (dBm)} = \text{EIRP} - 2.15$$
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



## 5 List of Measuring Equipment

| Instrument                     | Manufacturer | Model No.                | Serial No.  | Characteristics         | Calibration Date | Test Date                   | Due Date      | Remark                |
|--------------------------------|--------------|--------------------------|-------------|-------------------------|------------------|-----------------------------|---------------|-----------------------|
| Spectrum Analyzer              | R&S          | FSV40                    | 101040      | 10Hz~40GHz              | Oct. 11, 2023    | Nov. 03, 2023~Nov. 10, 2023 | Oct. 10, 2024 | Conducted (TH01-KS)   |
| Power divider                  | STI          | STI08-0055               | -           | 0.5~40GHz               | /                | Nov. 03, 2023~Nov. 10, 2023 | /             | Conducted (TH01-KS)   |
| Temperature & humidity chamber | Hongzhan     | LP-150U                  | H2014011440 | -40~+150°C<br>20%~95%RH | Jul. 06, 2023    | Nov. 03, 2023~Nov. 10, 2023 | Jul. 05, 2024 | Conducted (TH01-KS)   |
| EXA Spectrum Analyzer          | Keysight     | N9010A                   | MY55150244  | 10Hz~44GHz              | May 15, 2023     | Nov. 22, 2023               | May 14, 2024  | Radiation (03CH03-KS) |
| Loop Antenna                   | R&S          | HFH2-Z2                  | 100321      | 9kHz~30MHz              | Oct. 10, 2023    | Nov. 22, 2023               | Oct. 09, 2024 | Radiation (03CH03-KS) |
| Bilog Antenna                  | TeseQ        | CBL6112D                 | 23182       | 30MHz~1GHz              | Dec. 23, 2022    | Nov. 22, 2023               | Dec. 22, 2023 | Radiation (03CH03-KS) |
| Double Ridge Horn Antenna      | ETS-Lindgren | 3117                     | 75957       | 1GHz~18GHz              | Oct. 23, 2023    | Nov. 22, 2023               | Oct. 22, 2024 | Radiation (03CH03-KS) |
| SHF-EHF Horn                   | com-power    | AH-840                   | 101116      | 18GHz~40GHz             | Oct. 10, 2023    | Nov. 22, 2023               | Oct. 09, 2024 | Radiation (03CH03-KS) |
| Amplifier                      | SONOMA       | 310N                     | 413740      | 30MHz ~1000MHz          | Jan. 05, 2023    | Nov. 22, 2023               | Jan. 04, 2024 | Radiation (03CH03-KS) |
| Amplifier                      | EM           | EM18G40G A               | 060851      | 18~40GHz                | Jan. 05, 2023    | Nov. 22, 2023               | Jan. 04, 2024 | Radiation (03CH03-KS) |
| high gain Amplifier            | MITEQ        | AMF-7D-00 101800-30-1 0P | 2082394     | 1Ghz-18Ghz              | Jan. 05, 2023    | Nov. 22, 2023               | Jan. 04, 2024 | Radiation (03CH03-KS) |
| AC Power Source                | Chroma       | 61601                    | F104090004  | N/A                     | NCR              | Nov. 22, 2023               | NCR           | Radiation (03CH03-KS) |
| Turn Table                     | ChamPro      | EM 1000-T                | 060762-T    | 0~360 degree            | NCR              | Nov. 22, 2023               | NCR           | Radiation (03CH03-KS) |
| Antenna Mast                   | ChamPro      | EM 1000-A                | 060762-A    | 1 m~4 m                 | NCR              | Nov. 22, 2023               | NCR           | Radiation (03CH03-KS) |
| EXA Spectrum Analyzer          | Keysight     | N9010B                   | MY57471079  | 10Hz~44G,MAX 30dB       | Oct. 10, 2023    | Nov. 23, 2023               | Oct. 09, 2024 | Radiation (03CH04-KS) |
| Loop Antenna                   | R&S          | HFH2-Z2E                 | 101125      | 9kHz~30MHz              | Sep. 11 2023     | Nov. 23, 2023               | Sep. 10, 2024 | Radiation (03CH04-KS) |
| Bilog Antenna                  | TeseQ        | CBL6111D                 | 49922       | 30MHz~1GHz              | Apr. 09, 2023    | Nov. 23, 2023               | Apr. 08, 2024 | Radiation (03CH04-KS) |
| Horn Antenna                   | Schwarzbeck  | BBHA9120D                | 1284        | 1GHz~18GHz              | Oct. 10, 2023    | Nov. 23, 2023               | Oct. 09, 2024 | Radiation (03CH04-KS) |
| SHF-EHF Horn                   | Com-power    | AH-840                   | 101070      | 18GHz~40GHz             | Jan. 08, 2023    | Nov. 23, 2023               | Jan. 07, 2024 | Radiation (03CH04-KS) |
| Amplifier                      | SONOMA       | 310N                     | 380827      | 9KHz-1GHz               | Jul. 06, 2023    | Nov. 23, 2023               | Jul. 05, 2024 | Radiation (03CH04-KS) |
| Amplifier                      | MITEQ        | EM18G40G GA              | 060728      | 18~40GHz                | Jan. 05, 2023    | Nov. 23, 2023               | Jan. 04, 2024 | Radiation (03CH04-KS) |
| high gain Amplifier            | EM           | EM01G18G A               | 060840      | 1Ghz-18Ghz              | Oct. 10, 2023    | Nov. 23, 2023               | Oct. 09, 2024 | Radiation (03CH04-KS) |
| Amplifier                      | Agilent      | 8449B                    | 3008A02370  | 1Ghz-18Ghz              | Oct. 10, 2023    | Nov. 23, 2023               | Oct. 09, 2024 | Radiation (03CH04-KS) |
| AC Power Source                | Chroma       | 61601                    | F104090004  | N/A                     | NCR              | Nov. 23, 2023               | NCR           | Radiation (03CH04-KS) |
| Turn Table                     | ChamPro      | EM 1000-T                | 060762-T    | 0~360 degree            | NCR              | Nov. 23, 2023               | NCR           | Radiation (03CH04-KS) |
| Antenna Mast                   | ChamPro      | EM 1000-A                | 060762-A    | 1 m~4 m                 | NCR              | Nov. 23, 2023               | NCR           | Radiation (03CH04-KS) |

NCR: No Calibration Required

## 6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Measurement

|  |          |
|--|----------|
| Conducted Spurious Emission & Bandedge | ±2.26 dB |
| Occupied Channel Bandwidth             | ±0.1%    |
| Conducted Power                        | ±0.46 dB |
| Peak to Average Ratio                  | ±0.46 dB |
| Frequency Stability                    | ±0.4 Hz  |

### Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz) for 03CH03-KS

|   |        |
|---|--------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 3.76dB |
|---|--------|

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz) for 03CH03-KS

|   |        |
|---|--------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 3.65dB |
|---|--------|

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz) for 03CH03-KS

|   |        |
|---|--------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 3.57dB |
|---|--------|

### Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz) for 03CH04-KS

|   |        |
|---|--------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 3.82dB |
|---|--------|

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz) for 03CH04-KS

|   |        |
|---|--------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 3.56dB |
|---|--------|

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz) for 03CH04-KS

|   |        |
|---|--------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 3.54dB |
|---|--------|

----- THE END -----





## Appendix A. Test Results of Conducted Test

|                 |            |                     |         |
|-----------------|------------|---------------------|---------|
| Test Engineer : | Simle Wang | Temperature :       | 22~23°C |
|                 |            | Relative Humidity : | 40~42%  |

# FR1 N77 (ANT5)

## Transmitter Conducted Output Power And EIRP, (G<sub>T</sub> - L<sub>C</sub>)=-0.8dBi

| NR Band | SCS (kHz) | Bandwidth (MHz) | Arfcn  | Freq (MHz) | Modulation           | RB     | Conducted Power (dBm) | EIRP (dBm) | EIRP (W) |
|---------|-----------|-----------------|--------|------------|----------------------|--------|-----------------------|------------|----------|
| 77      | 30        | 100             | 633334 | 3500.01    | DFT-s-OFDM PI/2 BPSK | 135@67 | 25.45                 | 24.65      | 0.2917   |
| 77      | 30        | 100             | 633334 | 3500.01    | DFT-s-OFDM PI/2 BPSK | 1@1    | 25.68                 | 24.88      | 0.3076   |
| 77      | 30        | 100             | 633334 | 3500.01    | DFT-s-OFDM PI/2 BPSK | 1@271  | 24.53                 | 23.73      | 0.2360   |
| 77      | 30        | 100             | 633334 | 3500.01    | DFT-s-OFDM QPSK      | 135@67 | 25.54                 | 24.74      | 0.2979   |
| 77      | 30        | 100             | 633334 | 3500.01    | DFT-s-OFDM QPSK      | 1@1    | 25.47                 | 24.67      | 0.2931   |
| 77      | 30        | 100             | 633334 | 3500.01    | DFT-s-OFDM QPSK      | 1@271  | 24.56                 | 23.76      | 0.2377   |
| 77      | 30        | 100             | 633334 | 3500.01    | DFT-s-OFDM 16 QAM    | 135@67 | 23.09                 | 22.29      | 0.1694   |
| 77      | 30        | 100             | 633334 | 3500.01    | DFT-s-OFDM 16 QAM    | 1@1    | 23.14                 | 22.34      | 0.1714   |
| 77      | 30        | 100             | 633334 | 3500.01    | DFT-s-OFDM 16 QAM    | 1@271  | 22.65                 | 21.85      | 0.1531   |
| 77      | 30        | 100             | 633334 | 3500.01    | DFT-s-OFDM 64 QAM    | 135@67 | 21.51                 | 20.71      | 0.1178   |
| 77      | 30        | 100             | 633334 | 3500.01    | DFT-s-OFDM 64 QAM    | 1@1    | 21.31                 | 20.51      | 0.1125   |
| 77      | 30        | 100             | 633334 | 3500.01    | DFT-s-OFDM 64 QAM    | 1@271  | 20.87                 | 20.07      | 0.1016   |
| 77      | 30        | 100             | 633334 | 3500.01    | DFT-s-OFDM 256 QAM   | 135@67 | 19.42                 | 18.62      | 0.0728   |
| 77      | 30        | 100             | 633334 | 3500.01    | DFT-s-OFDM 256 QAM   | 1@1    | 19.23                 | 18.43      | 0.0697   |
| 77      | 30        | 100             | 633334 | 3500.01    | DFT-s-OFDM 256 QAM   | 1@271  | 18.71                 | 17.91      | 0.0618   |
| 77      | 30        | 100             | 633334 | 3500.01    | CP-OFDM QPSK         | 137@68 | 22.49                 | 21.69      | 0.1476   |
| 77      | 30        | 100             | 633334 | 3500.01    | CP-OFDM QPSK         | 1@1    | 22.54                 | 21.74      | 0.1493   |
| 77      | 30        | 100             | 633334 | 3500.01    | CP-OFDM QPSK         | 1@271  | 22.07                 | 21.27      | 0.1340   |
| 77      | 30        | 20              | 630668 | 3460.02    | DFT-s-OFDM PI/2 BPSK | 1@1    | 25.39                 | 24.59      | 0.2877   |
| 77      | 30        | 20              | 630668 | 3460.02    | DFT-s-OFDM QPSK      | 1@1    | 25.58                 | 24.78      | 0.3006   |
| 77      | 30        | 20              | 630668 | 3460.02    | DFT-s-OFDM 16 QAM    | 1@1    | 23.5                  | 22.7       | 0.1862   |
| 77      | 30        | 20              | 633334 | 3500.01    | DFT-s-OFDM PI/2 BPSK | 1@1    | 25.66                 | 24.86      | 0.3062   |
| 77      | 30        | 20              | 633334 | 3500.01    | DFT-s-OFDM QPSK      | 1@1    | 25.57                 | 24.77      | 0.2999   |
| 77      | 30        | 20              | 633334 | 3500.01    | DFT-s-OFDM 16 QAM    | 1@1    | 23.85                 | 23.05      | 0.2018   |
| 77      | 30        | 20              | 636000 | 3540       | DFT-s-OFDM PI/2 BPSK | 1@1    | 25.65                 | 24.85      | 0.3055   |
| 77      | 30        | 20              | 636000 | 3540       | DFT-s-OFDM QPSK      | 1@1    | 25.49                 | 24.69      | 0.2944   |
| 77      | 30        | 20              | 636000 | 3540       | DFT-s-OFDM 16 QAM    | 1@1    | 23.75                 | 22.95      | 0.1972   |
| 77      | 30        | 30              | 631000 | 3465       | DFT-s-OFDM PI/2 BPSK | 1@1    | 25.67                 | 24.87      | 0.3069   |
| 77      | 30        | 30              | 631000 | 3465       | DFT-s-OFDM QPSK      | 1@1    | 25.5                  | 24.7       | 0.2951   |
| 77      | 30        | 30              | 631000 | 3465       | DFT-s-OFDM 16 QAM    | 1@1    | 23.77                 | 22.97      | 0.1982   |
| 77      | 30        | 30              | 633334 | 3500.01    | DFT-s-OFDM PI/2 BPSK | 1@1    | 25.41                 | 24.61      | 0.2891   |
| 77      | 30        | 30              | 633334 | 3500.01    | DFT-s-OFDM QPSK      | 1@1    | 25.46                 | 24.66      | 0.2924   |
| 77      | 30        | 30              | 633334 | 3500.01    | DFT-s-OFDM 16 QAM    | 1@1    | 23.76                 | 22.96      | 0.1977   |
| 77      | 30        | 30              | 635666 | 3534.99    | DFT-s-OFDM PI/2 BPSK | 1@1    | 25.68                 | 24.88      | 0.3076   |
| 77      | 30        | 30              | 635666 | 3534.99    | DFT-s-OFDM QPSK      | 1@1    | 25.53                 | 24.73      | 0.2972   |
| 77      | 30        | 30              | 635666 | 3534.99    | DFT-s-OFDM 16 QAM    | 1@1    | 23.87                 | 23.07      | 0.2028   |
| 77      | 30        | 40              | 631334 | 3470.01    | DFT-s-OFDM PI/2 BPSK | 1@1    | 25.62                 | 24.82      | 0.3034   |
| 77      | 30        | 40              | 631334 | 3470.01    | DFT-s-OFDM QPSK      | 1@1    | 25.65                 | 24.85      | 0.3055   |
| 77      | 30        | 40              | 631334 | 3470.01    | DFT-s-OFDM 16 QAM    | 1@1    | 23.71                 | 22.91      | 0.1954   |
| 77      | 30        | 40              | 633334 | 3500.01    | DFT-s-OFDM PI/2 BPSK | 1@1    | 25.55                 | 24.75      | 0.2985   |

|    |    |    |        |         |                      |     |       |       |        |
|----|----|----|--------|---------|----------------------|-----|-------|-------|--------|
| 77 | 30 | 40 | 633334 | 3500.01 | DFT-s-OFDM QPSK      | 1@1 | 25.59 | 24.79 | 0.3013 |
| 77 | 30 | 40 | 633334 | 3500.01 | DFT-s-OFDM 16 QAM    | 1@1 | 23.91 | 23.11 | 0.2046 |
| 77 | 30 | 40 | 635332 | 3529.98 | DFT-s-OFDM PI/2 BPSK | 1@1 | 25.46 | 24.66 | 0.2924 |
| 77 | 30 | 40 | 635332 | 3529.98 | DFT-s-OFDM QPSK      | 1@1 | 25.52 | 24.72 | 0.2965 |
| 77 | 30 | 40 | 635332 | 3529.98 | DFT-s-OFDM 16 QAM    | 1@1 | 23.84 | 23.04 | 0.2014 |
| 77 | 30 | 50 | 631668 | 3475.02 | DFT-s-OFDM PI/2 BPSK | 1@1 | 25.34 | 24.54 | 0.2844 |
| 77 | 30 | 50 | 631668 | 3475.02 | DFT-s-OFDM QPSK      | 1@1 | 25.35 | 24.55 | 0.2851 |
| 77 | 30 | 50 | 631668 | 3475.02 | DFT-s-OFDM 16 QAM    | 1@1 | 23.47 | 22.67 | 0.1849 |
| 77 | 30 | 50 | 633334 | 3500.01 | DFT-s-OFDM PI/2 BPSK | 1@1 | 25.24 | 24.44 | 0.2780 |
| 77 | 30 | 50 | 633334 | 3500.01 | DFT-s-OFDM QPSK      | 1@1 | 25.27 | 24.47 | 0.2799 |
| 77 | 30 | 50 | 633334 | 3500.01 | DFT-s-OFDM 16 QAM    | 1@1 | 23.34 | 22.54 | 0.1795 |
| 77 | 30 | 50 | 635000 | 3525    | DFT-s-OFDM PI/2 BPSK | 1@1 | 25.59 | 24.79 | 0.3013 |
| 77 | 30 | 50 | 635000 | 3525    | DFT-s-OFDM QPSK      | 1@1 | 25.33 | 24.53 | 0.2838 |
| 77 | 30 | 50 | 635000 | 3525    | DFT-s-OFDM 16 QAM    | 1@1 | 23.71 | 22.91 | 0.1954 |
| 77 | 30 | 60 | 632000 | 3480    | DFT-s-OFDM PI/2 BPSK | 1@1 | 25.46 | 24.66 | 0.2924 |
| 77 | 30 | 60 | 632000 | 3480    | DFT-s-OFDM QPSK      | 1@1 | 25.44 | 24.64 | 0.2911 |
| 77 | 30 | 60 | 632000 | 3480    | DFT-s-OFDM 16 QAM    | 1@1 | 23.53 | 22.73 | 0.1875 |
| 77 | 30 | 60 | 633334 | 3500.01 | DFT-s-OFDM PI/2 BPSK | 1@1 | 25.24 | 24.44 | 0.2780 |
| 77 | 30 | 60 | 633334 | 3500.01 | DFT-s-OFDM QPSK      | 1@1 | 25.06 | 24.26 | 0.2667 |
| 77 | 30 | 60 | 633334 | 3500.01 | DFT-s-OFDM 16 QAM    | 1@1 | 23.4  | 22.6  | 0.1820 |
| 77 | 30 | 60 | 634666 | 3519.99 | DFT-s-OFDM PI/2 BPSK | 1@1 | 25.49 | 24.69 | 0.2944 |
| 77 | 30 | 60 | 634666 | 3519.99 | DFT-s-OFDM QPSK      | 1@1 | 25.44 | 24.64 | 0.2911 |
| 77 | 30 | 60 | 634666 | 3519.99 | DFT-s-OFDM 16 QAM    | 1@1 | 23.79 | 22.99 | 0.1991 |
| 77 | 30 | 70 | 632334 | 3485.01 | DFT-s-OFDM PI/2 BPSK | 1@1 | 25.5  | 24.7  | 0.2951 |
| 77 | 30 | 70 | 632334 | 3485.01 | DFT-s-OFDM QPSK      | 1@1 | 25.5  | 24.7  | 0.2951 |
| 77 | 30 | 70 | 632334 | 3485.01 | DFT-s-OFDM 16 QAM    | 1@1 | 23.59 | 22.79 | 0.1901 |
| 77 | 30 | 70 | 633334 | 3500.01 | DFT-s-OFDM PI/2 BPSK | 1@1 | 25.31 | 24.51 | 0.2825 |
| 77 | 30 | 70 | 633334 | 3500.01 | DFT-s-OFDM QPSK      | 1@1 | 25.3  | 24.5  | 0.2818 |
| 77 | 30 | 70 | 633334 | 3500.01 | DFT-s-OFDM 16 QAM    | 1@1 | 23.46 | 22.66 | 0.1845 |
| 77 | 30 | 70 | 634332 | 3514.98 | DFT-s-OFDM PI/2 BPSK | 1@1 | 25.37 | 24.57 | 0.2864 |
| 77 | 30 | 70 | 634332 | 3514.98 | DFT-s-OFDM QPSK      | 1@1 | 25.16 | 24.36 | 0.2729 |
| 77 | 30 | 70 | 634332 | 3514.98 | DFT-s-OFDM 16 QAM    | 1@1 | 23.57 | 22.77 | 0.1892 |
| 77 | 30 | 80 | 632668 | 3490.02 | DFT-s-OFDM PI/2 BPSK | 1@1 | 25.39 | 24.59 | 0.2877 |
| 77 | 30 | 80 | 632668 | 3490.02 | DFT-s-OFDM QPSK      | 1@1 | 25.39 | 24.59 | 0.2877 |
| 77 | 30 | 80 | 632668 | 3490.02 | DFT-s-OFDM 16 QAM    | 1@1 | 23.44 | 22.64 | 0.1837 |
| 77 | 30 | 80 | 633334 | 3500.01 | DFT-s-OFDM PI/2 BPSK | 1@1 | 25.24 | 24.44 | 0.2780 |
| 77 | 30 | 80 | 633334 | 3500.01 | DFT-s-OFDM QPSK      | 1@1 | 25.23 | 24.43 | 0.2773 |
| 77 | 30 | 80 | 633334 | 3500.01 | DFT-s-OFDM 16 QAM    | 1@1 | 23.35 | 22.55 | 0.1799 |
| 77 | 30 | 80 | 634000 | 3510    | DFT-s-OFDM PI/2 BPSK | 1@1 | 25.2  | 24.4  | 0.2754 |
| 77 | 30 | 80 | 634000 | 3510    | DFT-s-OFDM QPSK      | 1@1 | 25.22 | 24.42 | 0.2767 |
| 77 | 30 | 80 | 634000 | 3510    | DFT-s-OFDM 16 QAM    | 1@1 | 23.26 | 22.46 | 0.1762 |
| 77 | 30 | 90 | 633000 | 3495    | DFT-s-OFDM PI/2 BPSK | 1@1 | 25.26 | 24.46 | 0.2793 |
| 77 | 30 | 90 | 633000 | 3495    | DFT-s-OFDM QPSK      | 1@1 | 25.26 | 24.46 | 0.2793 |
| 77 | 30 | 90 | 633000 | 3495    | DFT-s-OFDM 16 QAM    | 1@1 | 23.33 | 22.53 | 0.1791 |
| 77 | 30 | 90 | 633334 | 3500.01 | DFT-s-OFDM PI/2 BPSK | 1@1 | 25.08 | 24.28 | 0.2679 |
| 77 | 30 | 90 | 633334 | 3500.01 | DFT-s-OFDM QPSK      | 1@1 | 25.1  | 24.3  | 0.2692 |
| 77 | 30 | 90 | 633334 | 3500.01 | DFT-s-OFDM 16 QAM    | 1@1 | 23.18 | 22.38 | 0.1730 |
| 77 | 30 | 90 | 633666 | 3504.99 | DFT-s-OFDM PI/2 BPSK | 1@1 | 25.29 | 24.49 | 0.2812 |

|    |    |    |        |         |                   |     |       |       |        |
|----|----|----|--------|---------|-------------------|-----|-------|-------|--------|
| 77 | 30 | 90 | 633666 | 3504.99 | DFT-s-OFDM QPSK   | 1@1 | 25.29 | 24.49 | 0.2812 |
| 77 | 30 | 90 | 633666 | 3504.99 | DFT-s-OFDM 16 QAM | 1@1 | 23.38 | 22.58 | 0.1811 |


## Frequency Stability

| NR Band | SCS (kHz) | Bandwidth (MHz) | Arfcn  | Freq (MHz) | Modulation      | RB   | Deviation (ppm) | Verdict | Environment |
|---------|-----------|-----------------|--------|------------|-----------------|------|-----------------|---------|-------------|
| 77      | 30        | 20              | 633334 | 3500.01    | DFT-s-OFDM QPSK | 50@0 | 0.0024          | PASS    | NV          |
| 77      | 30        | 20              | 633334 | 3500.01    | DFT-s-OFDM QPSK | 50@0 | 0.0044          | PASS    | LV          |
| 77      | 30        | 20              | 633334 | 3500.01    | DFT-s-OFDM QPSK | 50@0 | 0.0026          | PASS    | HV          |
| 77      | 30        | 20              | 633334 | 3500.01    | DFT-s-OFDM QPSK | 50@0 | 0.0033          | PASS    | -10°C       |
| 77      | 30        | 20              | 633334 | 3500.01    | DFT-s-OFDM QPSK | 50@0 | -0.0016         | PASS    | 0°C         |
| 77      | 30        | 20              | 633334 | 3500.01    | DFT-s-OFDM QPSK | 50@0 | 0.0029          | PASS    | 10°C        |
| 77      | 30        | 20              | 633334 | 3500.01    | DFT-s-OFDM QPSK | 50@0 | 0.0014          | PASS    | 20°C        |
| 77      | 30        | 20              | 633334 | 3500.01    | DFT-s-OFDM QPSK | 50@0 | 0.0027          | PASS    | 30°C        |
| 77      | 30        | 20              | 633334 | 3500.01    | DFT-s-OFDM QPSK | 50@0 | 0.0011          | PASS    | 40°C        |
| 77      | 30        | 20              | 633334 | 3500.01    | DFT-s-OFDM QPSK | 50@0 | 0.0029          | PASS    | 55°C        |


## Peak to Average Ratio

| NR Band | SCS (kHz) | Bandwidth (MHz) | Arfcn  | Freq (MHz) | Modulation           | RB   | Result (dB) | Limit (dB) | Verdict |
|---------|-----------|-----------------|--------|------------|----------------------|------|-------------|------------|---------|
| 77      | 30        | 20              | 633334 | 3500.01    | DFT-s-OFDM PI/2 BPSK | 50@0 | 7.1         | 13         | PASS    |
| 77      | 30        | 20              | 633334 | 3500.01    | DFT-s-OFDM PI/2 BPSK | 1@0  | 7.43        | 13         | PASS    |
| 77      | 30        | 20              | 633334 | 3500.01    | DFT-s-OFDM QPSK      | 50@0 | 8.42        | 13         | PASS    |
| 77      | 30        | 20              | 633334 | 3500.01    | DFT-s-OFDM QPSK      | 1@0  | 7.92        | 13         | PASS    |


N77(20M)\_DFT-s-OFDM\_PI\_2-BPSK\_Outer\_Full\_Mid\_CH

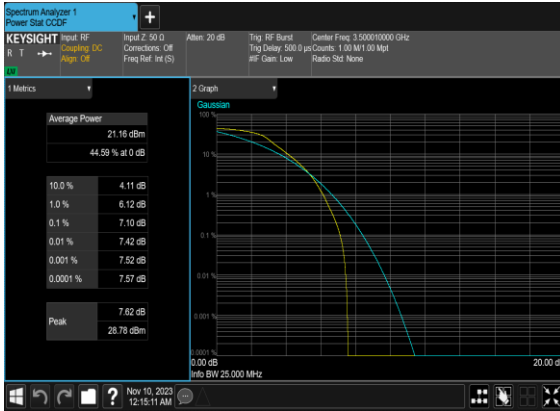

N77(20M)\_DFT-s-OFDM\_PI\_2-BPSK\_Edge\_1RB\_Left\_Mid\_CH

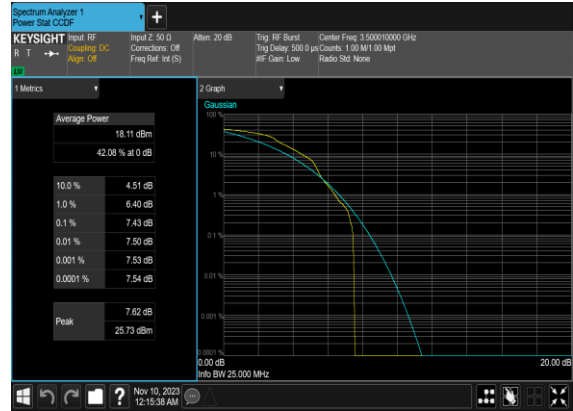

N77(20M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

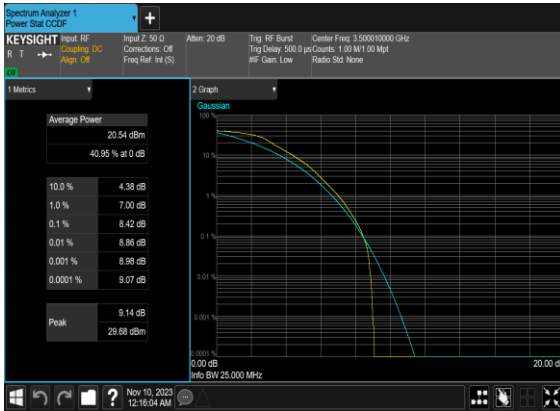

N77(20M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH




## Occupied Bandwidth

| NR Band | SCS (kHz) | Bandwidth (MHz) | Arfcn  | Freq (MHz) | Modulation      | RB    | OBW (MHz) | 26dB BW (MHz) |
|---------|-----------|-----------------|--------|------------|-----------------|-------|-----------|---------------|
| 77      | 30        | 20              | 633334 | 3500.01    | CP-OFDM QPSK    | 51@0  | 18.222    | 19.14         |
| 77      | 30        | 20              | 633334 | 3500.01    | CP-OFDM 16 QAM  | 51@0  | 18.125    | 18.97         |
| 77      | 30        | 20              | 633334 | 3500.01    | CP-OFDM 64 QAM  | 51@0  | 18.244    | 19.06         |
| 77      | 30        | 20              | 633334 | 3500.01    | CP-OFDM 256 QAM | 51@0  | 18.164    | 19.12         |
| 77      | 30        | 30              | 633334 | 3500.01    | CP-OFDM QPSK    | 78@0  | 27.905    | 29.06         |
| 77      | 30        | 30              | 633334 | 3500.01    | CP-OFDM 16 QAM  | 78@0  | 27.817    | 28.96         |
| 77      | 30        | 30              | 633334 | 3500.01    | CP-OFDM 64 QAM  | 78@0  | 27.854    | 29.03         |
| 77      | 30        | 30              | 633334 | 3500.01    | CP-OFDM 256 QAM | 78@0  | 27.846    | 29.31         |
| 77      | 30        | 40              | 633334 | 3500.01    | CP-OFDM QPSK    | 106@0 | 37.863    | 39.44         |
| 77      | 30        | 40              | 633334 | 3500.01    | CP-OFDM 16 QAM  | 106@0 | 37.818    | 39.27         |
| 77      | 30        | 40              | 633334 | 3500.01    | CP-OFDM 64 QAM  | 106@0 | 37.807    | 39.26         |
| 77      | 30        | 40              | 633334 | 3500.01    | CP-OFDM 256 QAM | 106@0 | 37.804    | 39.18         |
| 77      | 30        | 50              | 633334 | 3500.01    | CP-OFDM QPSK    | 133@0 | 47.5      | 49.07         |
| 77      | 30        | 50              | 633334 | 3500.01    | CP-OFDM 16 QAM  | 133@0 | 47.437    | 49.26         |
| 77      | 30        | 50              | 633334 | 3500.01    | CP-OFDM 64 QAM  | 133@0 | 47.458    | 49.02         |
| 77      | 30        | 50              | 633334 | 3500.01    | CP-OFDM 256 QAM | 133@0 | 47.532    | 49.17         |
| 77      | 30        | 60              | 633334 | 3500.01    | CP-OFDM QPSK    | 162@0 | 57.679    | 59.79         |
| 77      | 30        | 60              | 633334 | 3500.01    | CP-OFDM 16 QAM  | 162@0 | 57.703    | 59.69         |
| 77      | 30        | 60              | 633334 | 3500.01    | CP-OFDM 64 QAM  | 162@0 | 57.762    | 59.74         |
| 77      | 30        | 60              | 633334 | 3500.01    | CP-OFDM 256 QAM | 162@0 | 57.855    | 59.91         |
| 77      | 30        | 70              | 633334 | 3500.01    | CP-OFDM QPSK    | 189@0 | 67.577    | 69.5          |
| 77      | 30        | 70              | 633334 | 3500.01    | CP-OFDM 16 QAM  | 189@0 | 67.289    | 69.59         |
| 77      | 30        | 70              | 633334 | 3500.01    | CP-OFDM 64 QAM  | 189@0 | 67.358    | 69.56         |
| 77      | 30        | 70              | 633334 | 3500.01    | CP-OFDM 256 QAM | 189@0 | 67.494    | 69.59         |
| 77      | 30        | 80              | 633334 | 3500.01    | CP-OFDM QPSK    | 217@0 | 77.436    | 79.92         |
| 77      | 30        | 80              | 633334 | 3500.01    | CP-OFDM 16 QAM  | 217@0 | 77.456    | 79.93         |




|    |    |     |        |         |                    |       |        |       |
|----|----|-----|--------|---------|--------------------|-------|--------|-------|
| 77 | 30 | 80  | 633334 | 3500.01 | CP-OFDM<br>64 QAM  | 217@0 | 77.596 | 80.04 |
| 77 | 30 | 80  | 633334 | 3500.01 | CP-OFDM<br>256 QAM | 217@0 | 77.49  | 79.98 |
| 77 | 30 | 90  | 633334 | 3500.01 | CP-OFDM<br>QPSK    | 245@0 | 87.466 | 90.24 |
| 77 | 30 | 90  | 633334 | 3500.01 | CP-OFDM<br>16 QAM  | 245@0 | 87.244 | 90.14 |
| 77 | 30 | 90  | 633334 | 3500.01 | CP-OFDM<br>64 QAM  | 245@0 | 87.485 | 90.21 |
| 77 | 30 | 90  | 633334 | 3500.01 | CP-OFDM<br>256 QAM | 245@0 | 87.434 | 90.26 |
| 77 | 30 | 100 | 633334 | 3500.01 | CP-OFDM<br>QPSK    | 273@0 | 97.411 | 100.5 |
| 77 | 30 | 100 | 633334 | 3500.01 | CP-OFDM<br>16 QAM  | 273@0 | 97.679 | 100.6 |
| 77 | 30 | 100 | 633334 | 3500.01 | CP-OFDM<br>64 QAM  | 273@0 | 97.414 | 100.7 |
| 77 | 30 | 100 | 633334 | 3500.01 | CP-OFDM<br>256 QAM | 273@0 | 97.359 | 100.6 |


### N77(20M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

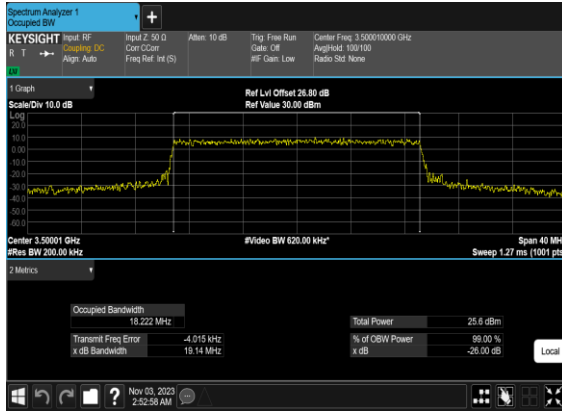


### N77(20M)\_CP-OFDM\_16QAM\_Outer\_Full\_Mid\_CH

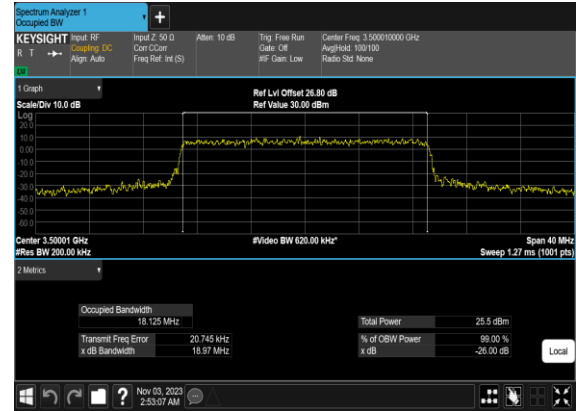


### N77(20M)\_CP-OFDM\_64QAM\_Outer\_Full\_Mid\_CH

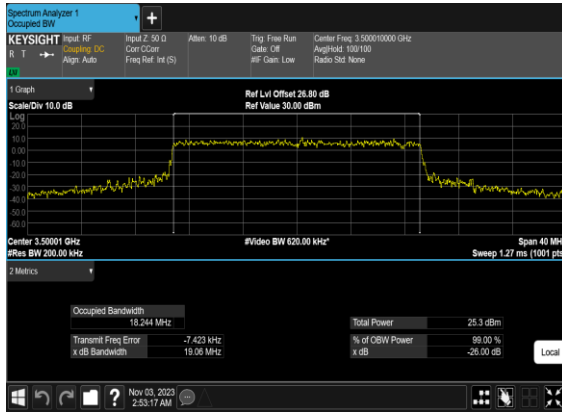


### N77(20M)\_CP-OFDM\_256QAM\_Outer\_Full\_Mid\_CH

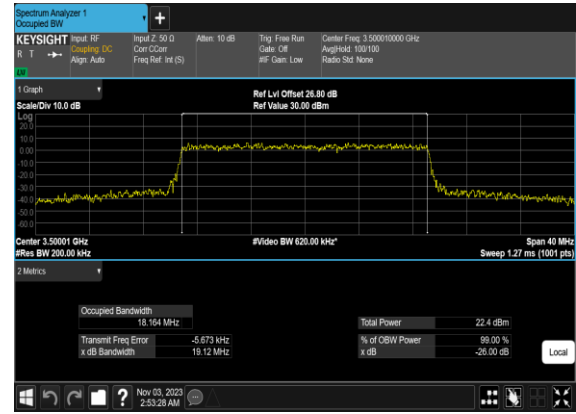


### N77(30M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

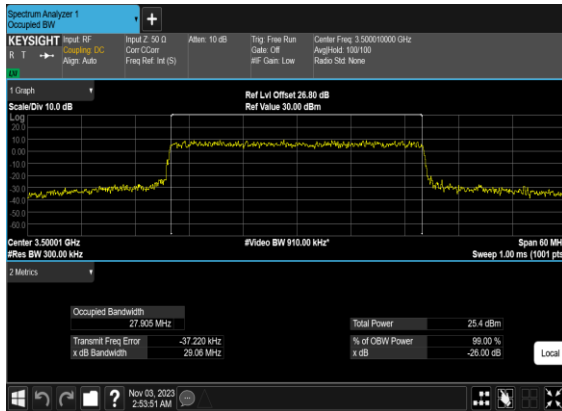


### N77(30M)\_CP-OFDM\_16QAM\_Outer\_Full\_Mid\_CH

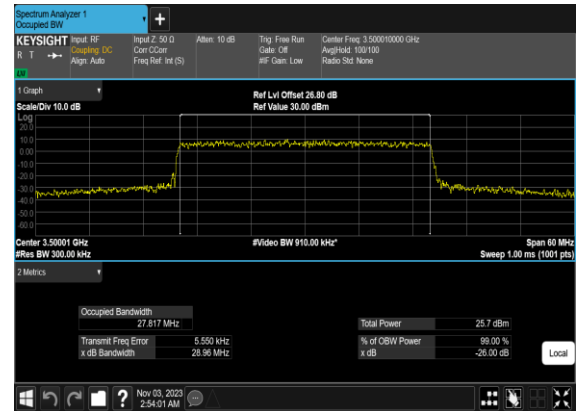


### N77(30M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

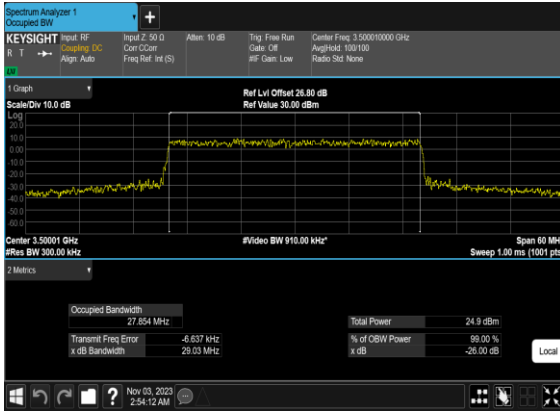


### N77(30M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

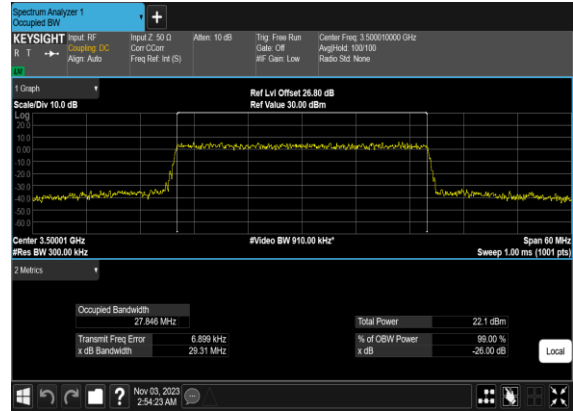


### N77(40M)\_CP- OFDM\_QPSK\_Outer\_Full\_Mid\_CH

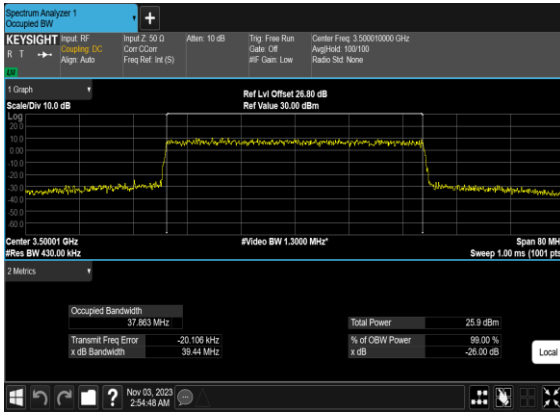


### N77(40M)\_CP-OFDM\_16 QAM\_Outer\_Full\_Mid\_CH

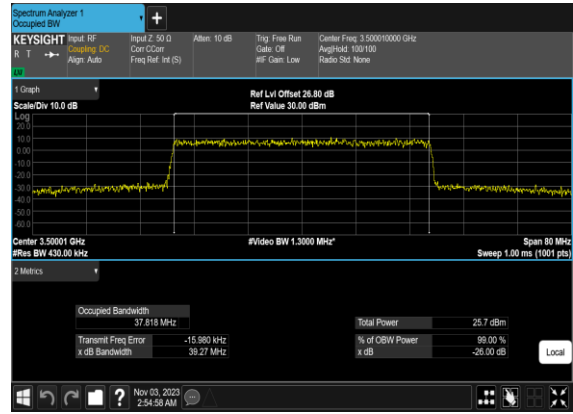


### N77(40M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

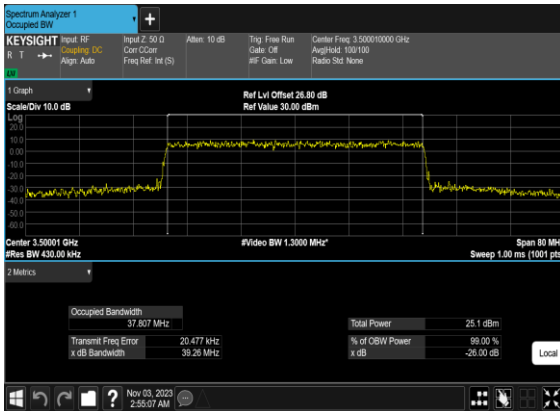


### N77(40M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

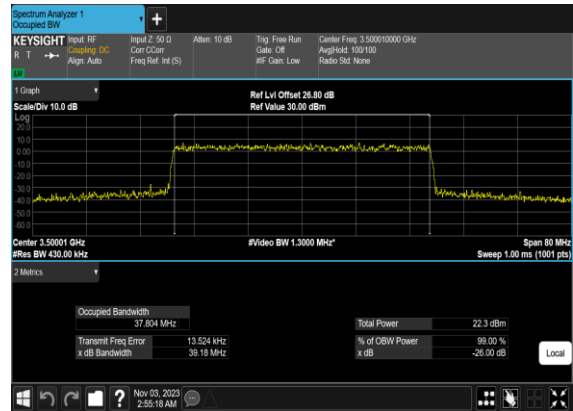


### N77(50M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

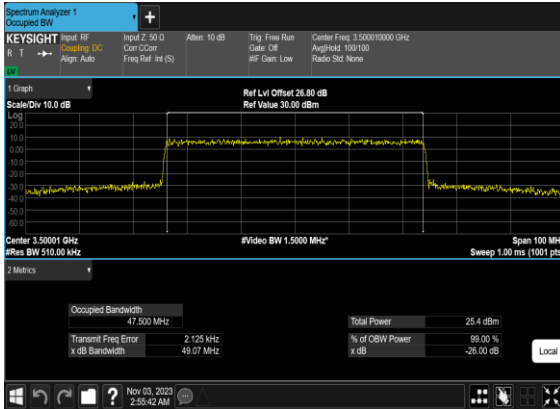

### N77(50M)\_CP-OFDM\_16QAM\_Outer\_Full\_Mid\_CH

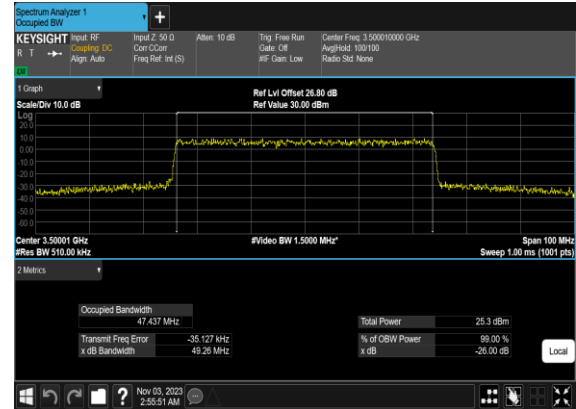


### N77(50M)\_CP-OFDM\_64QAM\_Outer\_Full\_Mid\_CH

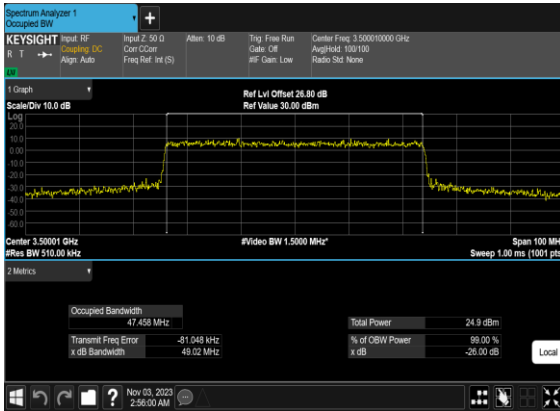


### N77(50M)\_CP-OFDM\_256QAM\_Outer\_Full\_Mid\_CH




### N77(60M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

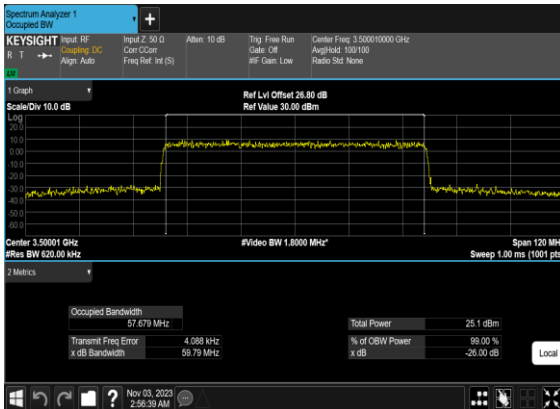


### N77(60M)\_CP-OFDM\_16QAM\_Outer\_Full\_Mid\_CH

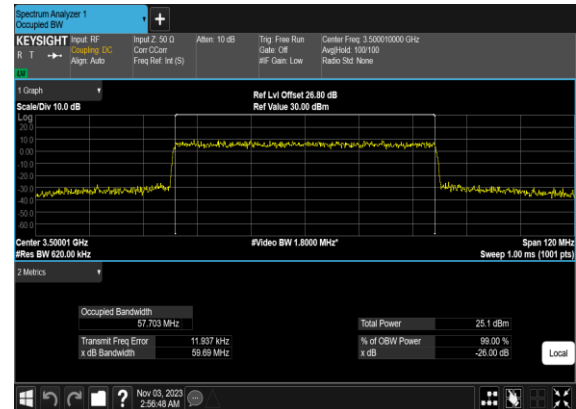

### N77(60M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

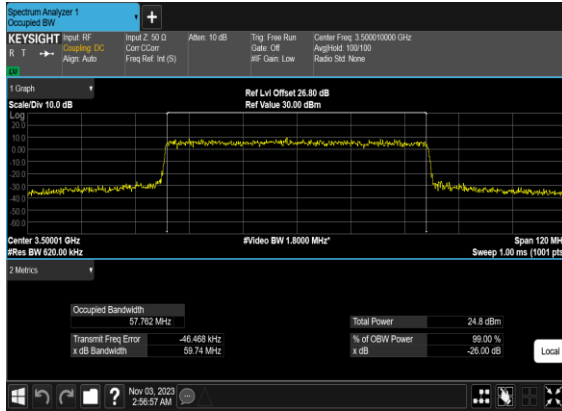


### N77(60M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

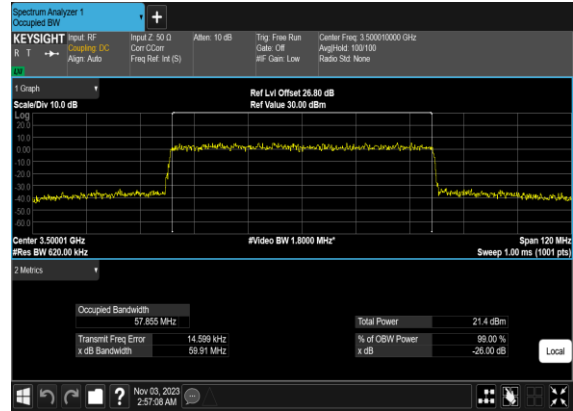


### N77(70M)\_CP- OFDM\_QPSK\_Outer\_Full\_Mid\_CH




### N77(70M)\_CP-OFDM\_16 QAM\_Outer\_Full\_Mid\_CH

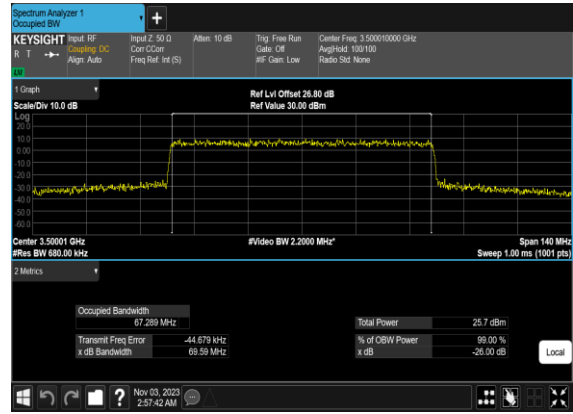


### N77(70M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

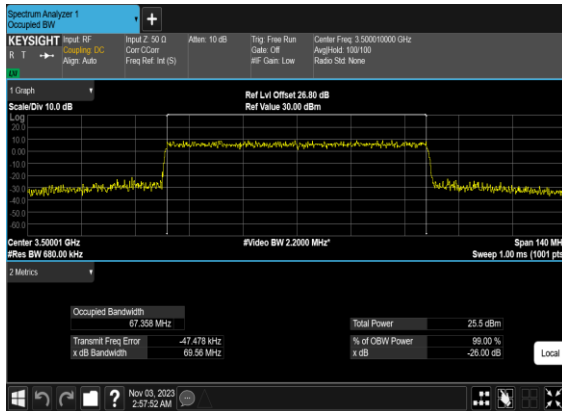


### N77(70M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

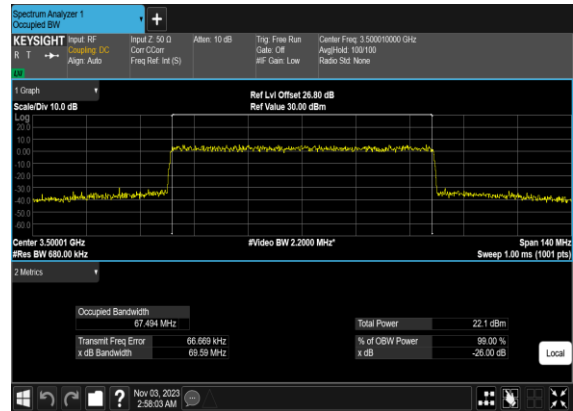


### N77(80M)\_CP- OFDM\_QPSK\_Outer\_Full\_Mid\_CH

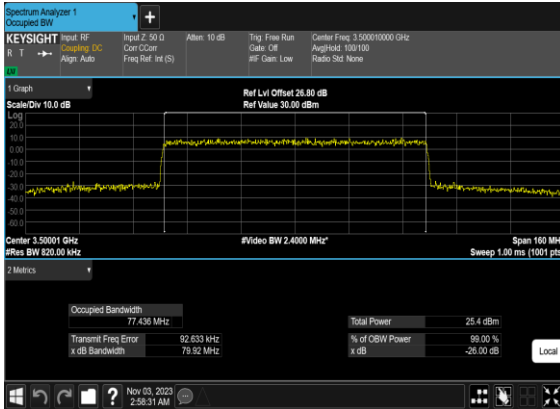


### N77(80M)\_CP-OFDM\_16 QAM\_Outer\_Full\_Mid\_CH

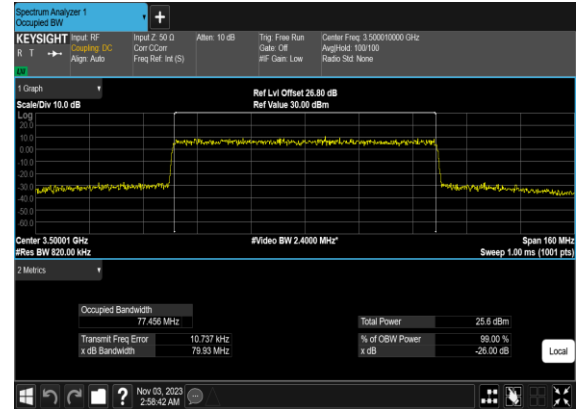


### N77(80M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

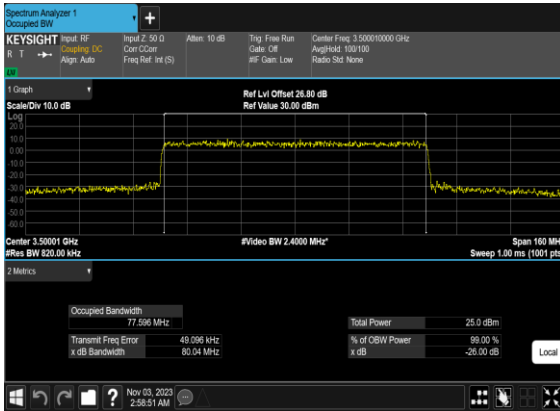


### N77(80M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

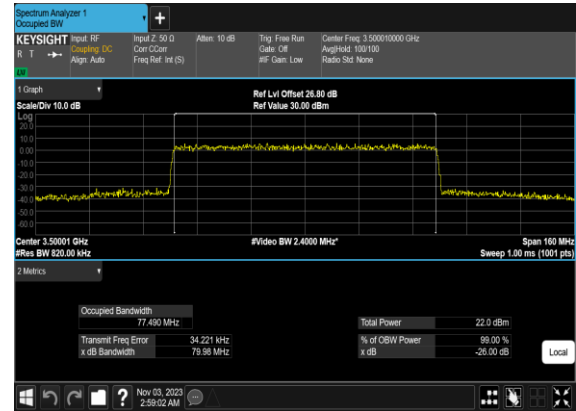


### N77(90M)\_CP- OFDM\_QPSK\_Outer\_Full\_Mid\_CH

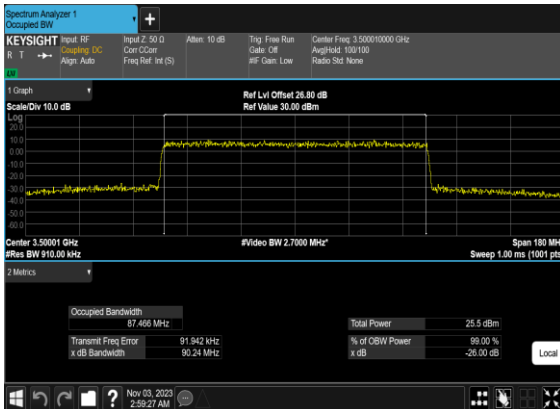


### N77(90M)\_CP-OFDM\_16 QAM\_Outer\_Full\_Mid\_CH

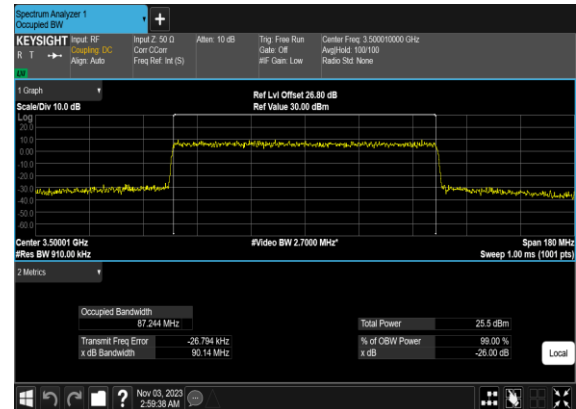


### N77(90M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

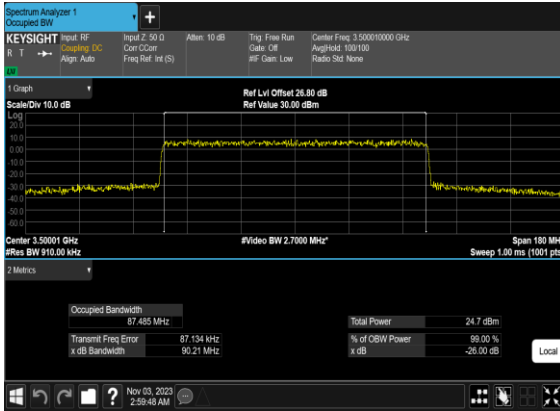


### N77(90M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

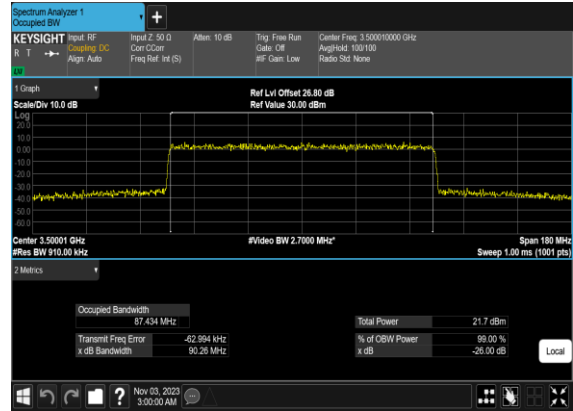


### N77(100M)\_CP- OFDM\_QPSK\_Outer\_Full\_Mid\_CH

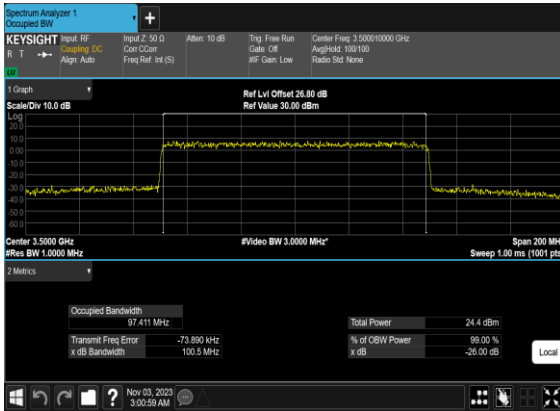


### N77(100M)\_CP-OFDM\_16 QAM\_Outer\_Full\_Mid\_CH

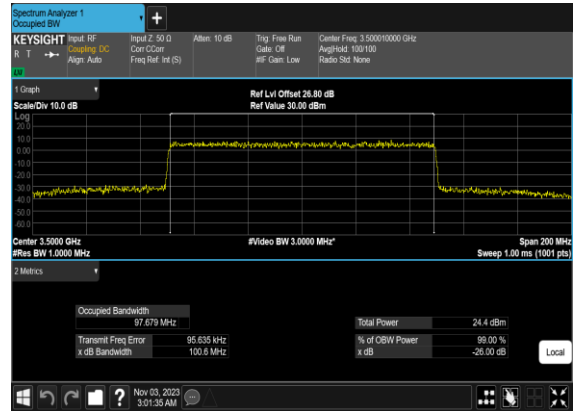

### N77(100M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

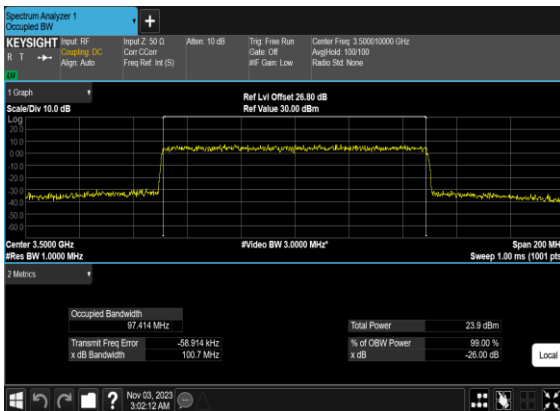

### N77(100M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

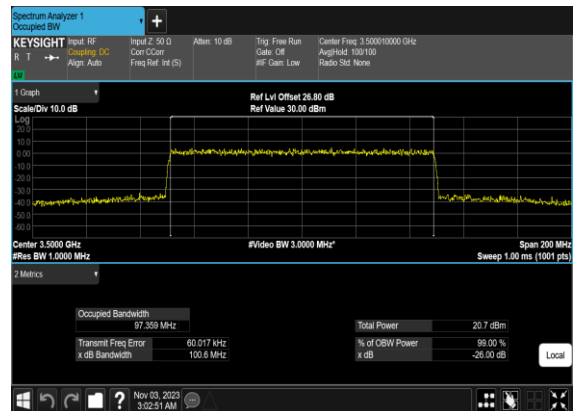


## Conducted Spurious Emissions

| NR Band | SCS (kHz) | Bandwidth (MHz) | Arfcn  | Freq (MHz) | Modulation         | RB  | Result    | Verdict |
|---------|-----------|-----------------|--------|------------|--------------------|-----|-----------|---------|
| 77      | 30        | 20              | 630668 | 3460.02    | DFT-s-OFDM<br>BPSK | 1@0 | see graph | ---     |
| 77      | 30        | 20              | 630668 | 3460.02    | DFT-s-OFDM<br>BPSK | 1@0 | see graph | PASS    |
| 77      | 30        | 20              | 630668 | 3460.02    | DFT-s-OFDM<br>BPSK | 1@0 | see graph | PASS    |
| 77      | 30        | 20              | 630668 | 3460.02    | DFT-s-OFDM<br>QPSK | 1@0 | see graph | ---     |
| 77      | 30        | 20              | 630668 | 3460.02    | DFT-s-OFDM<br>QPSK | 1@0 | see graph | PASS    |
| 77      | 30        | 20              | 630668 | 3460.02    | DFT-s-OFDM<br>QPSK | 1@0 | see graph | PASS    |
| 77      | 30        | 20              | 633334 | 3500.01    | DFT-s-OFDM<br>BPSK | 1@0 | see graph | ---     |
| 77      | 30        | 20              | 633334 | 3500.01    | DFT-s-OFDM<br>BPSK | 1@0 | see graph | PASS    |
| 77      | 30        | 20              | 633334 | 3500.01    | DFT-s-OFDM<br>BPSK | 1@0 | see graph | PASS    |
| 77      | 30        | 20              | 633334 | 3500.01    | DFT-s-OFDM<br>QPSK | 1@0 | see graph | ---     |
| 77      | 30        | 20              | 633334 | 3500.01    | DFT-s-OFDM<br>QPSK | 1@0 | see graph | PASS    |
| 77      | 30        | 20              | 633334 | 3500.01    | DFT-s-OFDM<br>QPSK | 1@0 | see graph | PASS    |
| 77      | 30        | 20              | 636000 | 3540.0     | DFT-s-OFDM<br>BPSK | 1@0 | see graph | ---     |
| 77      | 30        | 20              | 636000 | 3540.0     | DFT-s-OFDM<br>BPSK | 1@0 | see graph | PASS    |
| 77      | 30        | 20              | 636000 | 3540.0     | DFT-s-OFDM<br>BPSK | 1@0 | see graph | PASS    |
| 77      | 30        | 20              | 636000 | 3540.0     | DFT-s-OFDM<br>QPSK | 1@0 | see graph | ---     |
| 77      | 30        | 20              | 636000 | 3540.0     | DFT-s-OFDM<br>QPSK | 1@0 | see graph | PASS    |
| 77      | 30        | 20              | 636000 | 3540.0     | DFT-s-OFDM<br>QPSK | 1@0 | see graph | PASS    |
| 77      | 30        | 60              | 632000 | 3480.0     | DFT-s-OFDM<br>BPSK | 1@0 | see graph | ---     |
| 77      | 30        | 60              | 632000 | 3480.0     | DFT-s-OFDM<br>BPSK | 1@0 | see graph | PASS    |
| 77      | 30        | 60              | 632000 | 3480.0     | DFT-s-OFDM<br>BPSK | 1@0 | see graph | PASS    |




|    |    |     |        |         |                 |     |           |      |
|----|----|-----|--------|---------|-----------------|-----|-----------|------|
| 77 | 30 | 60  | 632000 | 3480.0  | DFT-s-OFDM QPSK | 1@0 | see graph | ---  |
| 77 | 30 | 60  | 632000 | 3480.0  | DFT-s-OFDM QPSK | 1@0 | see graph | PASS |
| 77 | 30 | 60  | 632000 | 3480.0  | DFT-s-OFDM QPSK | 1@0 | see graph | PASS |
| 77 | 30 | 60  | 633334 | 3500.01 | DFT-s-OFDM BPSK | 1@0 | see graph | ---  |
| 77 | 30 | 60  | 633334 | 3500.01 | DFT-s-OFDM BPSK | 1@0 | see graph | PASS |
| 77 | 30 | 60  | 633334 | 3500.01 | DFT-s-OFDM BPSK | 1@0 | see graph | PASS |
| 77 | 30 | 60  | 633334 | 3500.01 | DFT-s-OFDM QPSK | 1@0 | see graph | ---  |
| 77 | 30 | 60  | 633334 | 3500.01 | DFT-s-OFDM QPSK | 1@0 | see graph | PASS |
| 77 | 30 | 60  | 633334 | 3500.01 | DFT-s-OFDM QPSK | 1@0 | see graph | PASS |
| 77 | 30 | 60  | 634666 | 3519.99 | DFT-s-OFDM BPSK | 1@0 | see graph | ---  |
| 77 | 30 | 60  | 634666 | 3519.99 | DFT-s-OFDM BPSK | 1@0 | see graph | PASS |
| 77 | 30 | 60  | 634666 | 3519.99 | DFT-s-OFDM BPSK | 1@0 | see graph | PASS |
| 77 | 30 | 60  | 634666 | 3519.99 | DFT-s-OFDM QPSK | 1@0 | see graph | ---  |
| 77 | 30 | 60  | 634666 | 3519.99 | DFT-s-OFDM QPSK | 1@0 | see graph | PASS |
| 77 | 30 | 60  | 634666 | 3519.99 | DFT-s-OFDM QPSK | 1@0 | see graph | PASS |
| 77 | 30 | 100 | 633334 | 3500.01 | DFT-s-OFDM BPSK | 1@0 | see graph | ---  |
| 77 | 30 | 100 | 633334 | 3500.01 | DFT-s-OFDM BPSK | 1@0 | see graph | PASS |
| 77 | 30 | 100 | 633334 | 3500.01 | DFT-s-OFDM BPSK | 1@0 | see graph | PASS |
| 77 | 30 | 100 | 633334 | 3500.01 | DFT-s-OFDM QPSK | 1@0 | see graph | ---  |
| 77 | 30 | 100 | 633334 | 3500.01 | DFT-s-OFDM QPSK | 1@0 | see graph | PASS |
| 77 | 30 | 100 | 633334 | 3500.01 | DFT-s-OFDM QPSK | 1@0 | see graph | PASS |


### N77(20M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

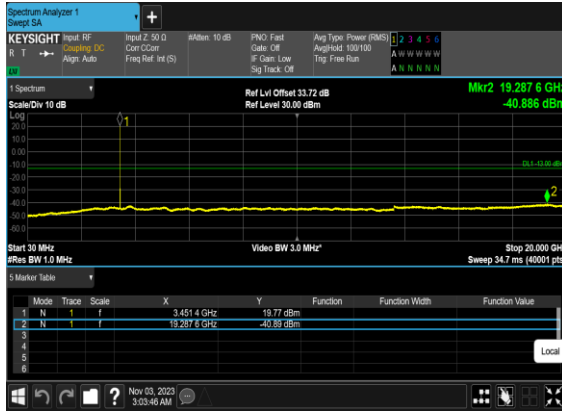


### N77(20M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

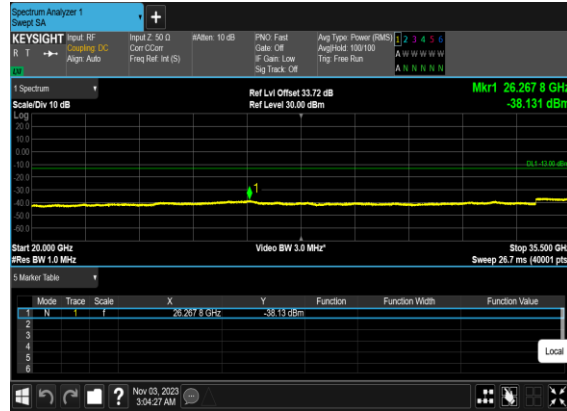


### N77(20M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

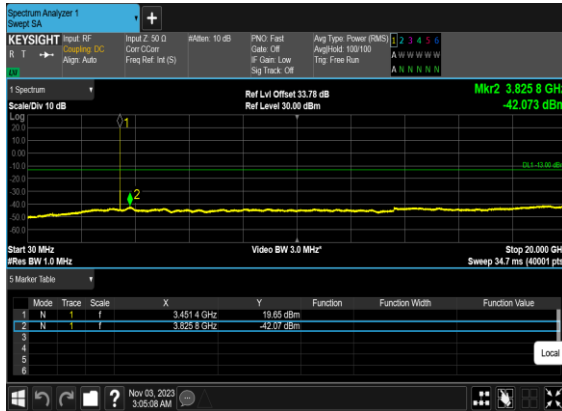


### N77(20M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

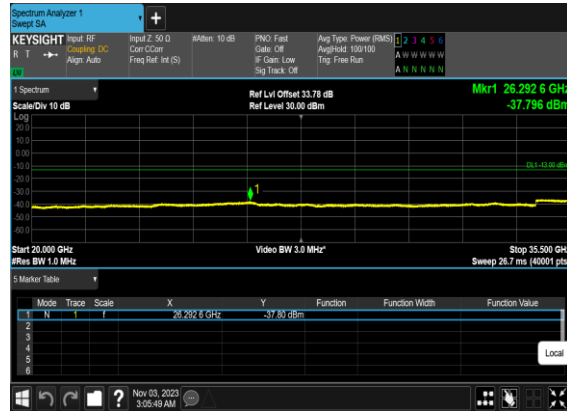

### N77(20M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

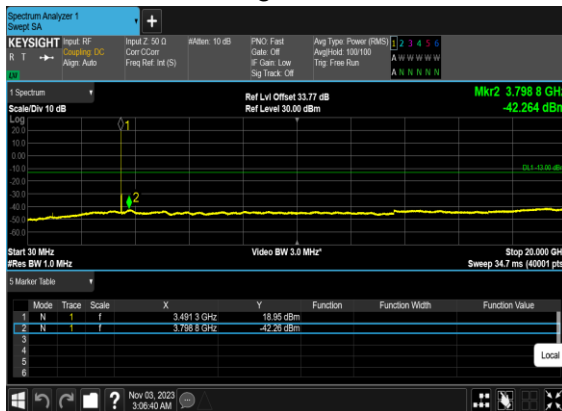


### N77(20M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

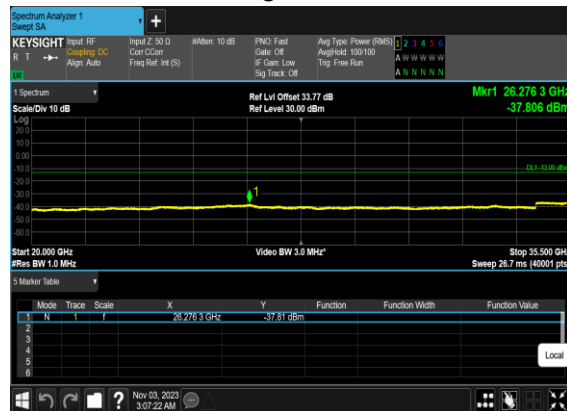

N77(20M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH




N77(20M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

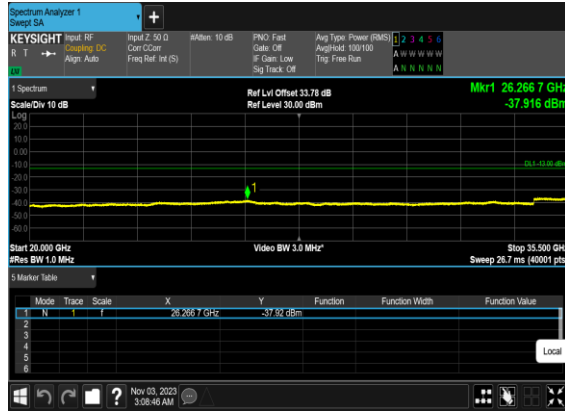


N77(20M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_High\_CH




N77(20M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_High\_CH

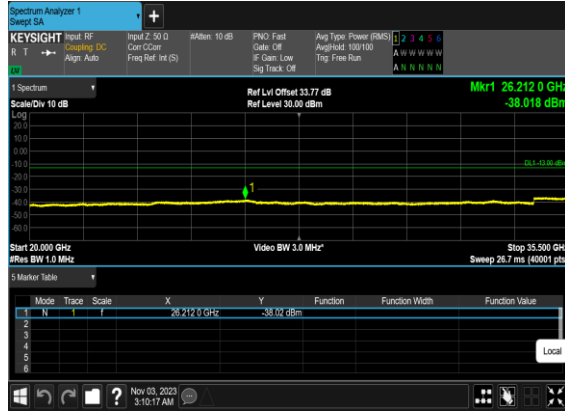


N77(20M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH

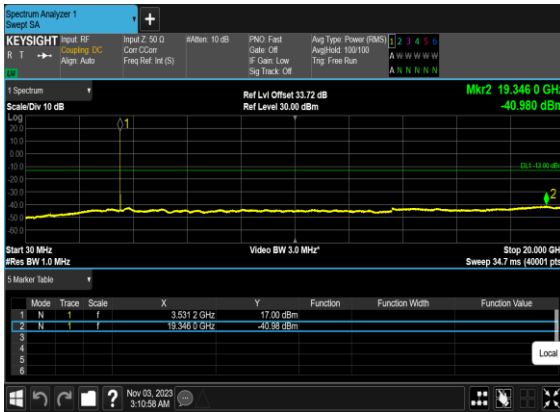


N77(20M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH

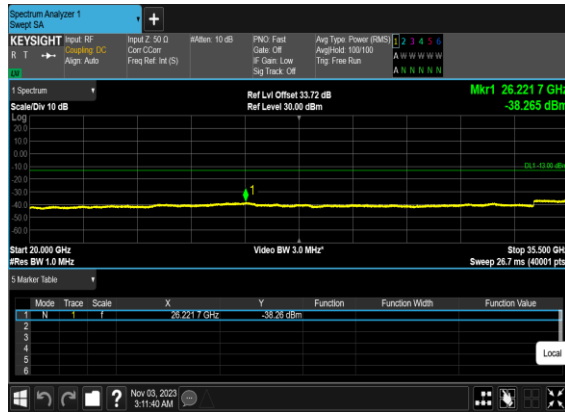


### N77(60M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

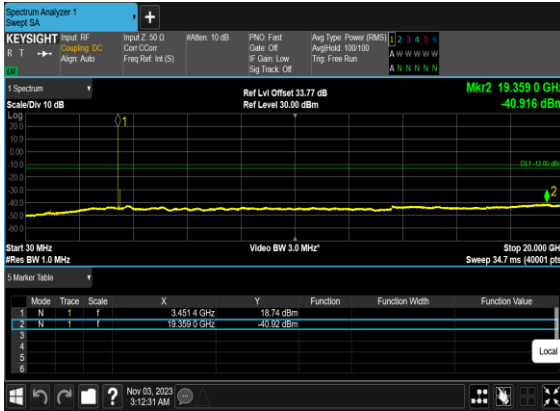

### N77(60M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

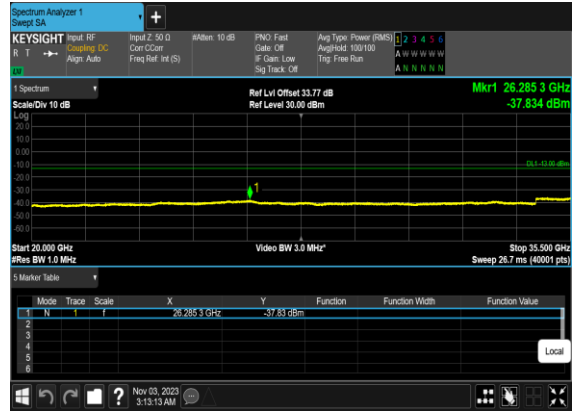


### N77(60M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

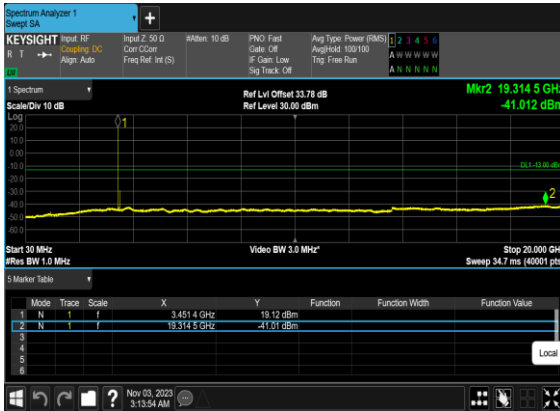


### N77(60M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH



### N77(60M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

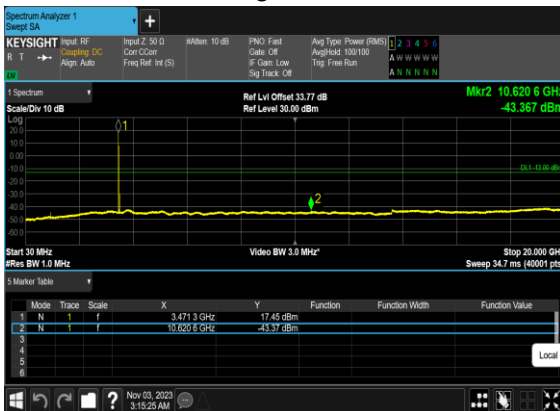


### N77(60M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

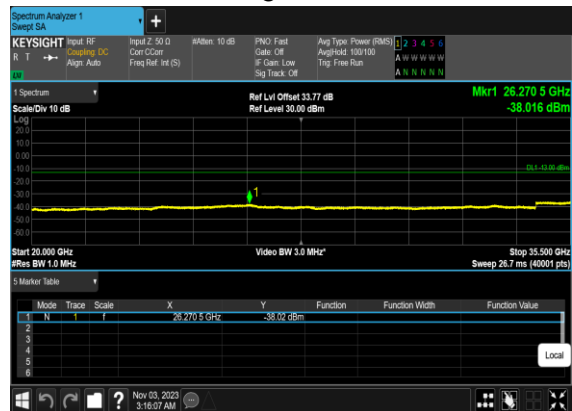


N77(60M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH



N77(60M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

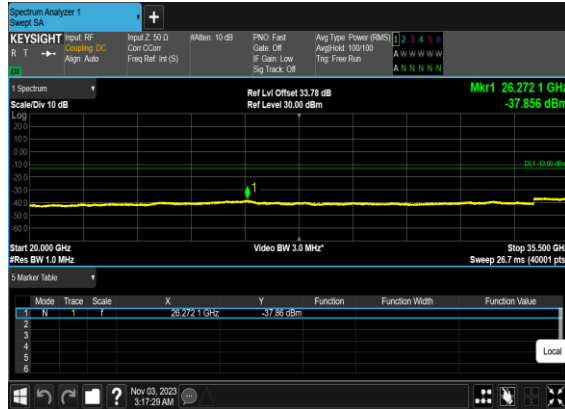


N77(60M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_High\_CH

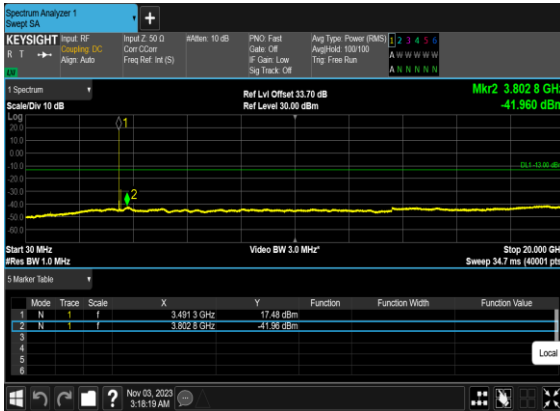


N77(60M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_High\_CH




N77(60M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH

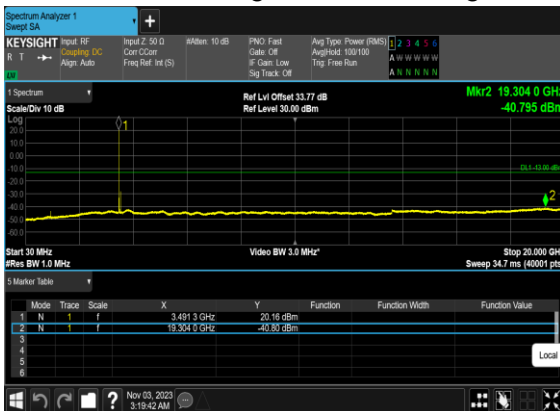


N77(60M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH

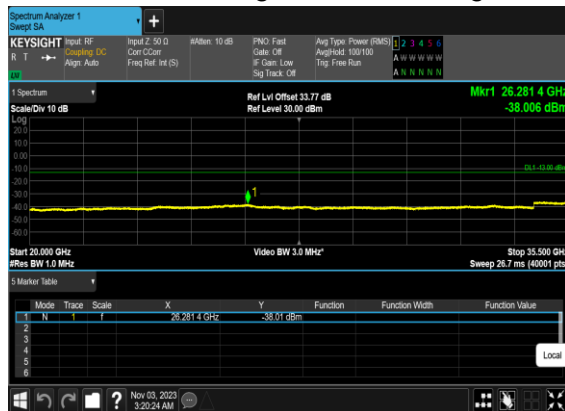


### N77(100M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

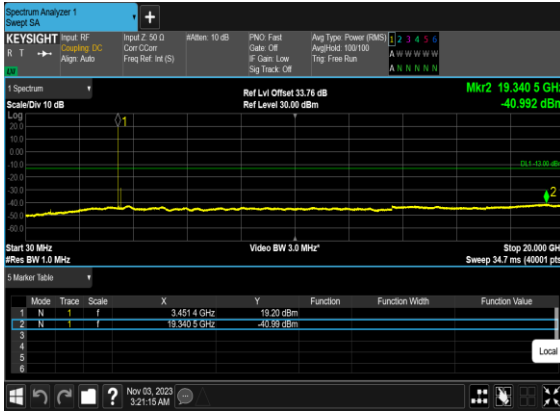


### N77(100M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

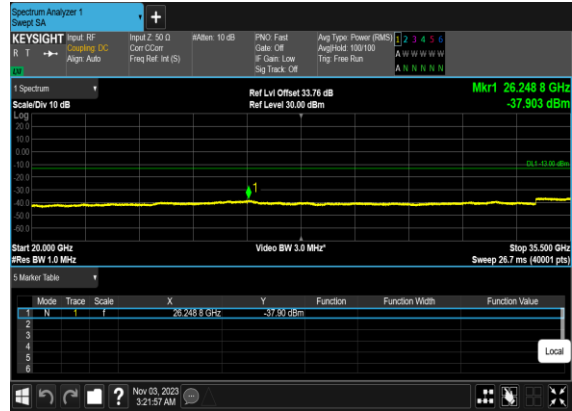

### N77(100M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

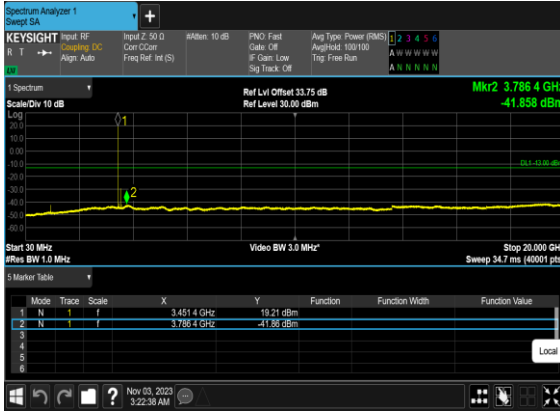


### N77(100M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

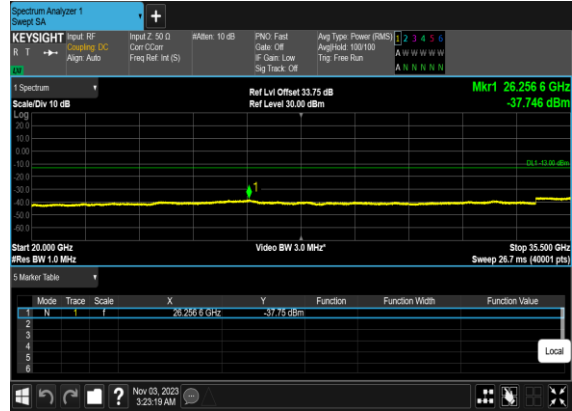


## Conducted Band Edge

| NR Band | SCS (kHz) | Bandwidth (MHz) | Arfcn  | Freq (MHz) | Modulation         | RB    | Result    | Verdict |
|---------|-----------|-----------------|--------|------------|--------------------|-------|-----------|---------|
| 77      | 30        | 20              | 630668 | 3460.02    | DFT-s-OFDM<br>BPSK | 1@0   | see graph | PASS    |
| 77      | 30        | 20              | 630668 | 3460.02    | DFT-s-OFDM<br>QPSK | 1@0   | see graph | PASS    |
| 77      | 30        | 20              | 630668 | 3460.02    | DFT-s-OFDM<br>BPSK | 50@0  | see graph | PASS    |
| 77      | 30        | 20              | 630668 | 3460.02    | DFT-s-OFDM<br>QPSK | 50@0  | see graph | PASS    |
| 77      | 30        | 20              | 636000 | 3540.0     | DFT-s-OFDM<br>BPSK | 1@50  | see graph | PASS    |
| 77      | 30        | 20              | 636000 | 3540.0     | DFT-s-OFDM<br>QPSK | 1@50  | see graph | PASS    |
| 77      | 30        | 20              | 636000 | 3540.0     | DFT-s-OFDM<br>BPSK | 50@0  | see graph | PASS    |
| 77      | 30        | 20              | 636000 | 3540.0     | DFT-s-OFDM<br>QPSK | 50@0  | see graph | PASS    |
| 77      | 30        | 60              | 632000 | 3480.0     | DFT-s-OFDM<br>BPSK | 1@0   | see graph | PASS    |
| 77      | 30        | 60              | 632000 | 3480.0     | DFT-s-OFDM<br>QPSK | 1@0   | see graph | PASS    |
| 77      | 30        | 60              | 632000 | 3480.0     | DFT-s-OFDM<br>BPSK | 162@0 | see graph | PASS    |
| 77      | 30        | 60              | 632000 | 3480.0     | DFT-s-OFDM<br>QPSK | 162@0 | see graph | PASS    |
| 77      | 30        | 60              | 634666 | 3519.99    | DFT-s-OFDM<br>BPSK | 1@161 | see graph | PASS    |
| 77      | 30        | 60              | 634666 | 3519.99    | DFT-s-OFDM<br>QPSK | 1@161 | see graph | PASS    |
| 77      | 30        | 60              | 634666 | 3519.99    | DFT-s-OFDM<br>BPSK | 162@0 | see graph | PASS    |
| 77      | 30        | 60              | 634666 | 3519.99    | DFT-s-OFDM<br>QPSK | 162@0 | see graph | PASS    |
| 77      | 30        | 100             | 633334 | 3500.01    | DFT-s-OFDM<br>BPSK | 1@0   | see graph | PASS    |
| 77      | 30        | 100             | 633334 | 3500.01    | DFT-s-OFDM<br>QPSK | 1@0   | see graph | PASS    |
| 77      | 30        | 100             | 633334 | 3500.01    | DFT-s-OFDM<br>BPSK | 1@272 | see graph | PASS    |
| 77      | 30        | 100             | 633334 | 3500.01    | DFT-s-OFDM<br>QPSK | 1@272 | see graph | PASS    |
| 77      | 30        | 100             | 633334 | 3500.01    | DFT-s-OFDM<br>BPSK | 270@0 | see graph | PASS    |
| 77      | 30        | 100             | 633334 | 3500.01    | DFT-s-OFDM<br>QPSK | 270@0 | see graph | PASS    |


N77(20M)\_DFT-s-  
OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

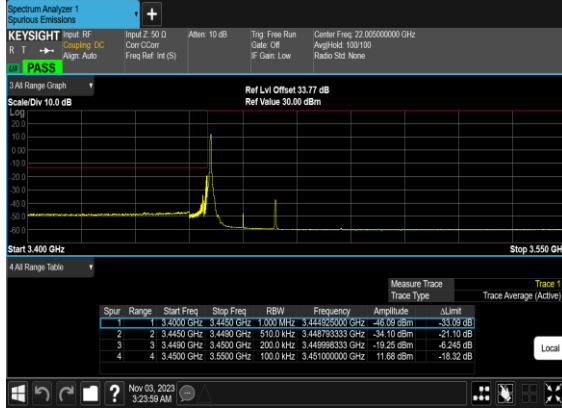


N77(20M)\_DFT-s-  
OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

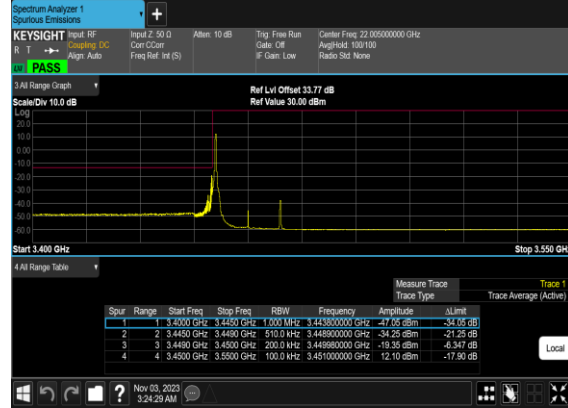


N77(20M)\_DFT-s-  
OFDM\_BPSK\_Outer\_Full\_Low\_CH

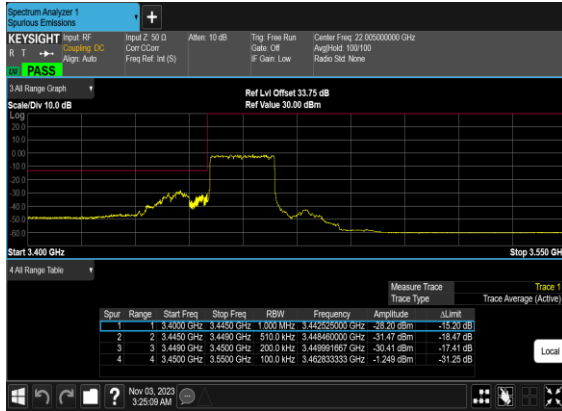


N77(20M)\_DFT-s-  
OFDM\_QPSK\_Outer\_Full\_Low\_CH

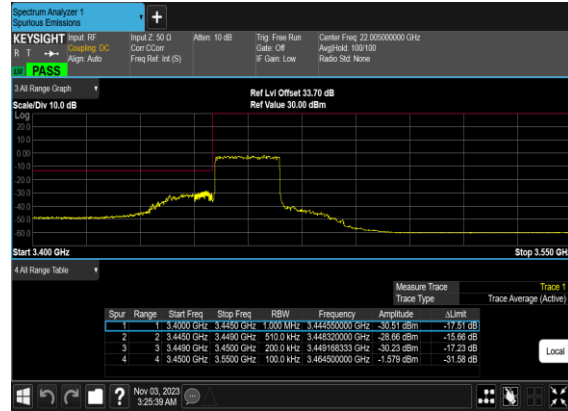

N77(20M)\_DFT-s-  
OFDM\_BPSK\_Edge\_1RB\_Right\_High\_CH

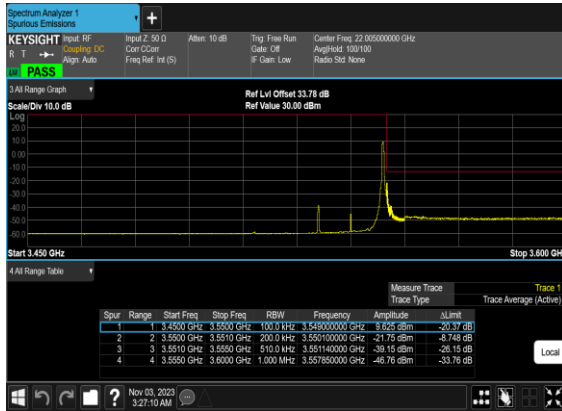

N77(20M)\_DFT-s-  
OFDM\_QPSK\_Edge\_1RB\_Right\_High\_CH

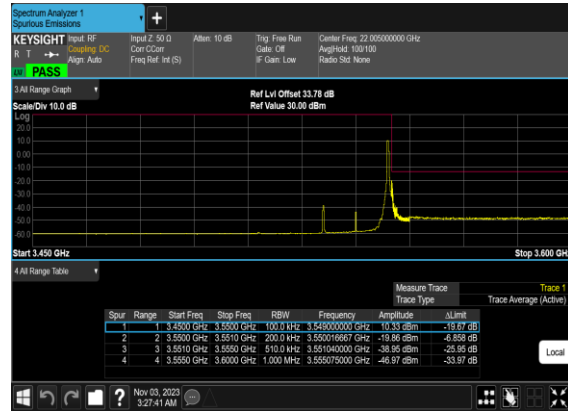





### N77(20M)\_DFT-s-OFDM\_BPSK\_Outer\_Full\_High\_CH




### N77(20M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_High\_CH

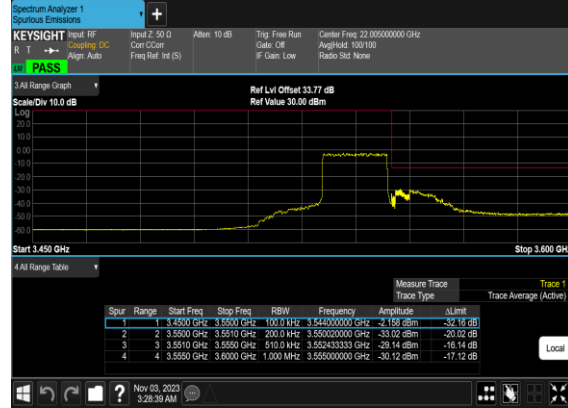


### N77(60M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

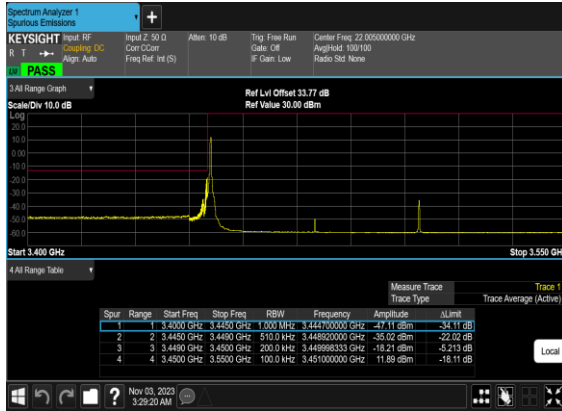


### N77(60M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

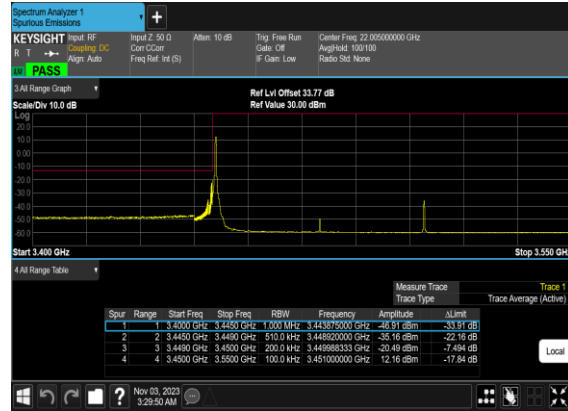

### N77(60M)\_DFT-s-OFDM\_BPSK\_Outer\_Full\_Low\_CH

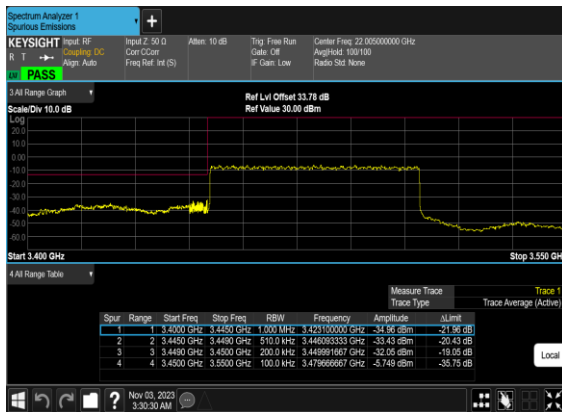

### N77(60M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_Low\_CH

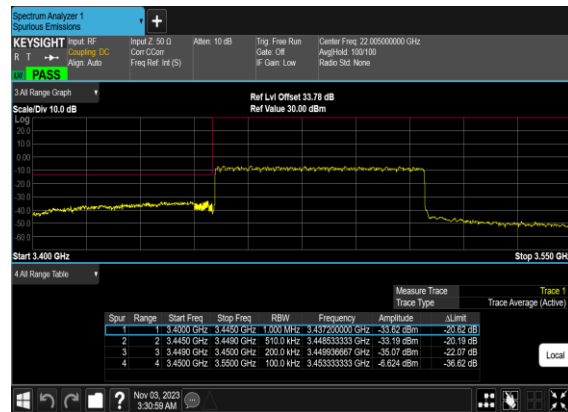

N77(60M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Right\_High\_CH




N77(60M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Right\_High\_CH




N77(60M)\_DFT-s-OFDM\_BPSK\_Outer\_Full\_High\_CH




N77(60M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_High\_CH

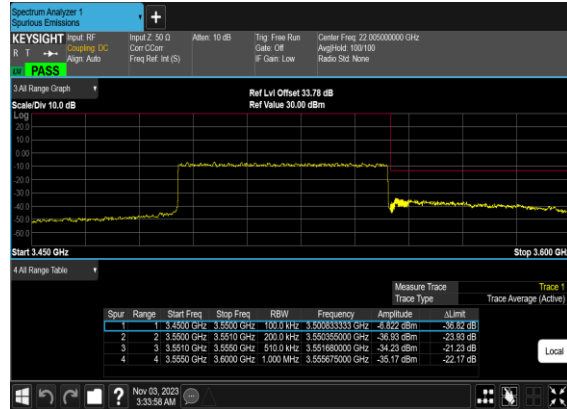


N77(100M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

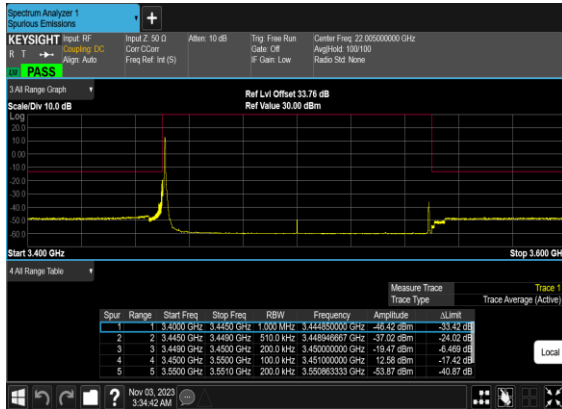


N77(100M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

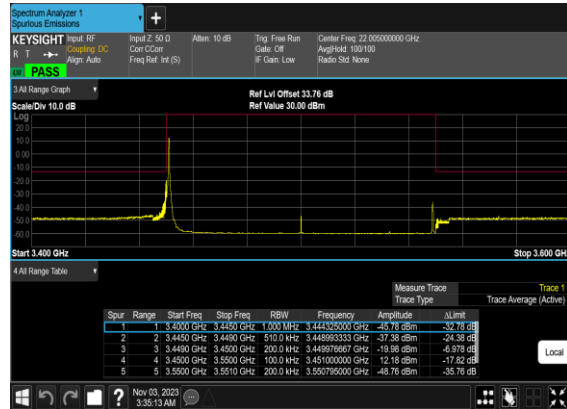


### N77(100M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Right\_Mid\_CH

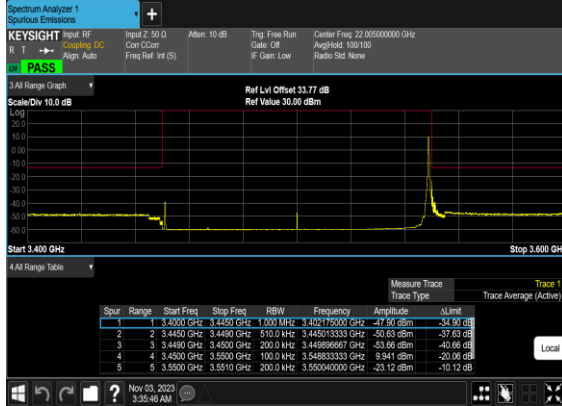


### N77(100M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Right\_Mid\_CH

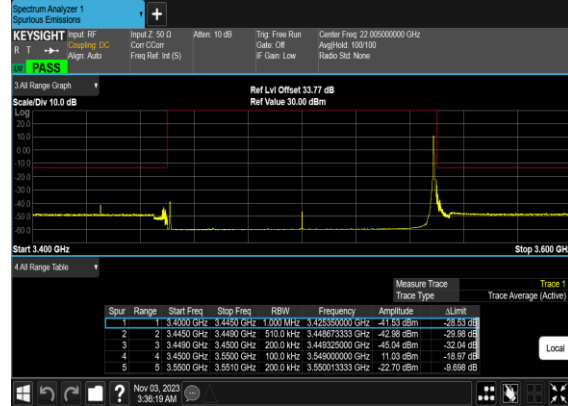

### N77(100M)\_DFT-s-OFDM\_BPSK\_Outer\_Full\_Mid\_CH

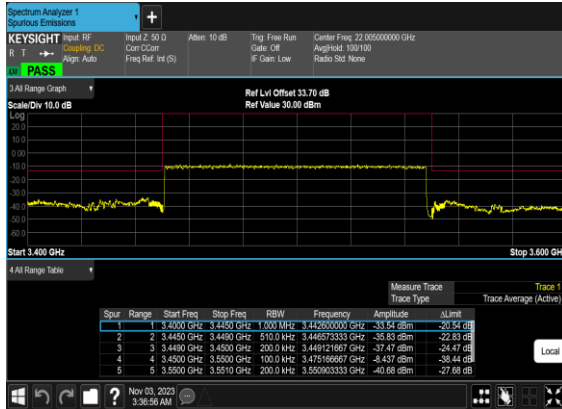

### N77(100M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

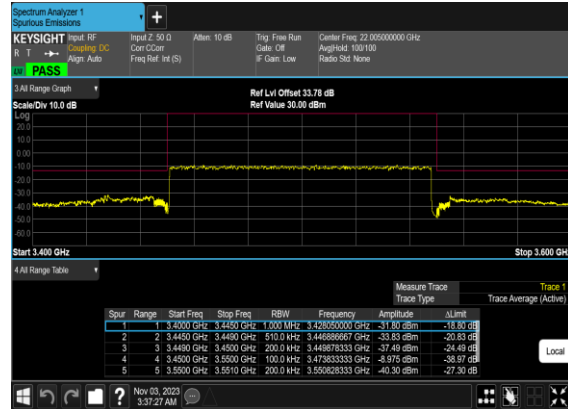

# FR1 N78 (ANT5)

## Transmitter Conducted Output Power And EIRP, ( $G_T - L_C$ )=-0.8dBi

| NR Band | SCS (kHz) | Bandwidth (MHz) | Arfcn  | Freq (MHz) | Modulation           | RB     | Conducted Power (dBm) | EIRP (dBm) | EIRP (W) |
|---------|-----------|-----------------|--------|------------|----------------------|--------|-----------------------|------------|----------|
| 78      | 30        | 100             | 633334 | 3500.01    | DFT-s-OFDM PI/2 BPSK | 135@67 | 25.66                 | 24.86      | 0.3062   |
| 78      | 30        | 100             | 633334 | 3500.01    | DFT-s-OFDM PI/2 BPSK | 1@1    | 25.43                 | 24.63      | 0.2904   |
| 78      | 30        | 100             | 633334 | 3500.01    | DFT-s-OFDM PI/2 BPSK | 1@271  | 25.51                 | 24.71      | 0.2958   |
| 78      | 30        | 100             | 633334 | 3500.01    | DFT-s-OFDM QPSK      | 135@67 | 25.58                 | 24.78      | 0.3006   |
| 78      | 30        | 100             | 633334 | 3500.01    | DFT-s-OFDM QPSK      | 1@1    | 25.4                  | 24.6       | 0.2884   |
| 78      | 30        | 100             | 633334 | 3500.01    | DFT-s-OFDM QPSK      | 1@271  | 25.47                 | 24.67      | 0.2931   |
| 78      | 30        | 100             | 633334 | 3500.01    | DFT-s-OFDM 16 QAM    | 135@67 | 22.87                 | 22.07      | 0.1611   |
| 78      | 30        | 100             | 633334 | 3500.01    | DFT-s-OFDM 16 QAM    | 1@1    | 23.02                 | 22.22      | 0.1667   |
| 78      | 30        | 100             | 633334 | 3500.01    | DFT-s-OFDM 16 QAM    | 1@271  | 22.33                 | 21.53      | 0.1422   |
| 78      | 30        | 100             | 633334 | 3500.01    | DFT-s-OFDM 64 QAM    | 135@67 | 21.3                  | 20.5       | 0.1122   |
| 78      | 30        | 100             | 633334 | 3500.01    | DFT-s-OFDM 64 QAM    | 1@1    | 21.17                 | 20.37      | 0.1089   |
| 78      | 30        | 100             | 633334 | 3500.01    | DFT-s-OFDM 64 QAM    | 1@271  | 20.49                 | 19.69      | 0.0931   |
| 78      | 30        | 100             | 633334 | 3500.01    | DFT-s-OFDM 256 QAM   | 135@67 | 19.24                 | 18.44      | 0.0698   |
| 78      | 30        | 100             | 633334 | 3500.01    | DFT-s-OFDM 256 QAM   | 1@1    | 19.07                 | 18.27      | 0.0671   |
| 78      | 30        | 100             | 633334 | 3500.01    | DFT-s-OFDM 256 QAM   | 1@271  | 18.34                 | 17.54      | 0.0568   |
| 78      | 30        | 100             | 633334 | 3500.01    | CP-OFDM QPSK         | 137@68 | 22.24                 | 21.44      | 0.1393   |
| 78      | 30        | 100             | 633334 | 3500.01    | CP-OFDM QPSK         | 1@1    | 22.38                 | 21.58      | 0.1439   |
| 78      | 30        | 100             | 633334 | 3500.01    | CP-OFDM QPSK         | 1@271  | 21.72                 | 20.92      | 0.1236   |
| 78      | 30        | 20              | 630668 | 3460.02    | DFT-s-OFDM PI/2 BPSK | 1@1    | 25.49                 | 24.69      | 0.2944   |
| 78      | 30        | 20              | 630668 | 3460.02    | DFT-s-OFDM QPSK      | 1@1    | 25.31                 | 24.51      | 0.2825   |
| 78      | 30        | 20              | 630668 | 3460.02    | DFT-s-OFDM 16 QAM    | 1@1    | 23.6                  | 22.8       | 0.1905   |
| 78      | 30        | 20              | 633334 | 3500.01    | DFT-s-OFDM PI/2 BPSK | 1@1    | 25.35                 | 24.55      | 0.2851   |
| 78      | 30        | 20              | 633334 | 3500.01    | DFT-s-OFDM QPSK      | 1@1    | 25.32                 | 24.52      | 0.2831   |
| 78      | 30        | 20              | 633334 | 3500.01    | DFT-s-OFDM 16 QAM    | 1@1    | 23.44                 | 22.64      | 0.1837   |
| 78      | 30        | 20              | 636000 | 3540       | DFT-s-OFDM PI/2 BPSK | 1@1    | 25.52                 | 24.72      | 0.2965   |
| 78      | 30        | 20              | 636000 | 3540       | DFT-s-OFDM QPSK      | 1@1    | 25.5                  | 24.7       | 0.2951   |
| 78      | 30        | 20              | 636000 | 3540       | DFT-s-OFDM 16 QAM    | 1@1    | 23.63                 | 22.83      | 0.1919   |
| 78      | 30        | 30              | 631000 | 3465       | DFT-s-OFDM PI/2 BPSK | 1@1    | 25.6                  | 24.8       | 0.3020   |
| 78      | 30        | 30              | 631000 | 3465       | DFT-s-OFDM QPSK      | 1@1    | 25.46                 | 24.66      | 0.2924   |
| 78      | 30        | 30              | 631000 | 3465       | DFT-s-OFDM 16 QAM    | 1@1    | 23.72                 | 22.92      | 0.1959   |
| 78      | 30        | 30              | 633334 | 3500.01    | DFT-s-OFDM PI/2 BPSK | 1@1    | 25.57                 | 24.77      | 0.2999   |

|    |    |    |        |         |                      |     |       |       |        |
|----|----|----|--------|---------|----------------------|-----|-------|-------|--------|
| 78 | 30 | 30 | 633334 | 3500.01 | DFT-s-OFDM QPSK      | 1@1 | 25.52 | 24.72 | 0.2965 |
| 78 | 30 | 30 | 633334 | 3500.01 | DFT-s-OFDM 16 QAM    | 1@1 | 23.62 | 22.82 | 0.1914 |
| 78 | 30 | 30 | 635666 | 3534.99 | DFT-s-OFDM PI/2 BPSK | 1@1 | 25.52 | 24.72 | 0.2965 |
| 78 | 30 | 30 | 635666 | 3534.99 | DFT-s-OFDM QPSK      | 1@1 | 25.49 | 24.69 | 0.2944 |
| 78 | 30 | 30 | 635666 | 3534.99 | DFT-s-OFDM 16 QAM    | 1@1 | 23.6  | 22.8  | 0.1905 |
| 78 | 30 | 40 | 631334 | 3470.01 | DFT-s-OFDM PI/2 BPSK | 1@1 | 25.53 | 24.73 | 0.2972 |
| 78 | 30 | 40 | 631334 | 3470.01 | DFT-s-OFDM QPSK      | 1@1 | 25.48 | 24.68 | 0.2938 |
| 78 | 30 | 40 | 631334 | 3470.01 | DFT-s-OFDM 16 QAM    | 1@1 | 23.62 | 22.82 | 0.1914 |
| 78 | 30 | 40 | 633334 | 3500.01 | DFT-s-OFDM PI/2 BPSK | 1@1 | 25.49 | 24.69 | 0.2944 |
| 78 | 30 | 40 | 633334 | 3500.01 | DFT-s-OFDM QPSK      | 1@1 | 25.42 | 24.62 | 0.2897 |
| 78 | 30 | 40 | 633334 | 3500.01 | DFT-s-OFDM 16 QAM    | 1@1 | 23.54 | 22.74 | 0.1879 |
| 78 | 30 | 40 | 635332 | 3529.98 | DFT-s-OFDM PI/2 BPSK | 1@1 | 25.6  | 24.8  | 0.3020 |
| 78 | 30 | 40 | 635332 | 3529.98 | DFT-s-OFDM QPSK      | 1@1 | 25.6  | 24.8  | 0.3020 |
| 78 | 30 | 40 | 635332 | 3529.98 | DFT-s-OFDM 16 QAM    | 1@1 | 23.73 | 22.93 | 0.1963 |
| 78 | 30 | 50 | 631668 | 3475.02 | DFT-s-OFDM PI/2 BPSK | 1@1 | 25.22 | 24.42 | 0.2767 |
| 78 | 30 | 50 | 631668 | 3475.02 | DFT-s-OFDM QPSK      | 1@1 | 25.01 | 24.21 | 0.2636 |
| 78 | 30 | 50 | 631668 | 3475.02 | DFT-s-OFDM 16 QAM    | 1@1 | 23.27 | 22.47 | 0.1766 |
| 78 | 30 | 50 | 633334 | 3500.01 | DFT-s-OFDM PI/2 BPSK | 1@1 | 25.16 | 24.36 | 0.2729 |
| 78 | 30 | 50 | 633334 | 3500.01 | DFT-s-OFDM QPSK      | 1@1 | 25.15 | 24.35 | 0.2723 |
| 78 | 30 | 50 | 633334 | 3500.01 | DFT-s-OFDM 16 QAM    | 1@1 | 23.26 | 22.46 | 0.1762 |
| 78 | 30 | 50 | 635000 | 3525    | DFT-s-OFDM PI/2 BPSK | 1@1 | 25.23 | 24.43 | 0.2773 |
| 78 | 30 | 50 | 635000 | 3525    | DFT-s-OFDM QPSK      | 1@1 | 25.18 | 24.38 | 0.2742 |
| 78 | 30 | 50 | 635000 | 3525    | DFT-s-OFDM 16 QAM    | 1@1 | 23.32 | 22.52 | 0.1786 |
| 78 | 30 | 60 | 632000 | 3480    | DFT-s-OFDM PI/2 BPSK | 1@1 | 25.2  | 24.4  | 0.2754 |
| 78 | 30 | 60 | 632000 | 3480    | DFT-s-OFDM QPSK      | 1@1 | 24.99 | 24.19 | 0.2624 |
| 78 | 30 | 60 | 632000 | 3480    | DFT-s-OFDM 16 QAM    | 1@1 | 23.27 | 22.47 | 0.1766 |
| 78 | 30 | 60 | 633334 | 3500.01 | DFT-s-OFDM PI/2 BPSK | 1@1 | 25.04 | 24.24 | 0.2655 |
| 78 | 30 | 60 | 633334 | 3500.01 | DFT-s-OFDM QPSK      | 1@1 | 24.99 | 24.19 | 0.2624 |
| 78 | 30 | 60 | 633334 | 3500.01 | DFT-s-OFDM 16 QAM    | 1@1 | 23.14 | 22.34 | 0.1714 |
| 78 | 30 | 60 | 634666 | 3519.99 | DFT-s-OFDM PI/2 BPSK | 1@1 | 25.45 | 24.65 | 0.2917 |
| 78 | 30 | 60 | 634666 | 3519.99 | DFT-s-OFDM QPSK      | 1@1 | 25.41 | 24.61 | 0.2891 |
| 78 | 30 | 60 | 634666 | 3519.99 | DFT-s-OFDM 16 QAM    | 1@1 | 23.55 | 22.75 | 0.1884 |
| 78 | 30 | 70 | 632334 | 3485.01 | DFT-s-OFDM PI/2 BPSK | 1@1 | 25.38 | 24.58 | 0.2871 |
| 78 | 30 | 70 | 632334 | 3485.01 | DFT-s-OFDM QPSK      | 1@1 | 25.18 | 24.38 | 0.2742 |
| 78 | 30 | 70 | 632334 | 3485.01 | DFT-s-OFDM 16 QAM    | 1@1 | 23.45 | 22.65 | 0.1841 |
| 78 | 30 | 70 | 633334 | 3500.01 | DFT-s-OFDM PI/2 BPSK | 1@1 | 25.23 | 24.43 | 0.2773 |
| 78 | 30 | 70 | 633334 | 3500.01 | DFT-s-OFDM QPSK      | 1@1 | 25    | 24.2  | 0.2630 |
| 78 | 30 | 70 | 633334 | 3500.01 | DFT-s-OFDM 16 QAM    | 1@1 | 23.27 | 22.47 | 0.1766 |

|    |    |    |        |         |                         |     |       |       |        |
|----|----|----|--------|---------|-------------------------|-----|-------|-------|--------|
| 78 | 30 | 70 | 634332 | 3514.98 | DFT-s-OFDM PI/2<br>BPSK | 1@1 | 25.16 | 24.36 | 0.2729 |
| 78 | 30 | 70 | 634332 | 3514.98 | DFT-s-OFDM QPSK         | 1@1 | 24.95 | 24.15 | 0.2600 |
| 78 | 30 | 70 | 634332 | 3514.98 | DFT-s-OFDM 16<br>QAM    | 1@1 | 23.08 | 22.28 | 0.1690 |
| 78 | 30 | 80 | 632668 | 3490.02 | DFT-s-OFDM PI/2<br>BPSK | 1@1 | 25.19 | 24.39 | 0.2748 |
| 78 | 30 | 80 | 632668 | 3490.02 | DFT-s-OFDM QPSK         | 1@1 | 25.02 | 24.22 | 0.2642 |
| 78 | 30 | 80 | 632668 | 3490.02 | DFT-s-OFDM 16<br>QAM    | 1@1 | 23.26 | 22.46 | 0.1762 |
| 78 | 30 | 80 | 633334 | 3500.01 | DFT-s-OFDM PI/2<br>BPSK | 1@1 | 24.99 | 24.19 | 0.2624 |
| 78 | 30 | 80 | 633334 | 3500.01 | DFT-s-OFDM QPSK         | 1@1 | 24.82 | 24.02 | 0.2523 |
| 78 | 30 | 80 | 633334 | 3500.01 | DFT-s-OFDM 16<br>QAM    | 1@1 | 23.09 | 22.29 | 0.1694 |
| 78 | 30 | 80 | 634000 | 3510    | DFT-s-OFDM PI/2<br>BPSK | 1@1 | 24.96 | 24.16 | 0.2606 |
| 78 | 30 | 80 | 634000 | 3510    | DFT-s-OFDM QPSK         | 1@1 | 24.78 | 23.98 | 0.2500 |
| 78 | 30 | 80 | 634000 | 3510    | DFT-s-OFDM 16<br>QAM    | 1@1 | 23.02 | 22.22 | 0.1667 |
| 78 | 30 | 90 | 633000 | 3495    | DFT-s-OFDM PI/2<br>BPSK | 1@1 | 25.12 | 24.32 | 0.2704 |
| 78 | 30 | 90 | 633000 | 3495    | DFT-s-OFDM QPSK         | 1@1 | 24.96 | 24.16 | 0.2606 |
| 78 | 30 | 90 | 633000 | 3495    | DFT-s-OFDM 16<br>QAM    | 1@1 | 23.21 | 22.41 | 0.1742 |
| 78 | 30 | 90 | 633334 | 3500.01 | DFT-s-OFDM PI/2<br>BPSK | 1@1 | 25.16 | 24.36 | 0.2729 |
| 78 | 30 | 90 | 633334 | 3500.01 | DFT-s-OFDM QPSK         | 1@1 | 24.99 | 24.19 | 0.2624 |
| 78 | 30 | 90 | 633334 | 3500.01 | DFT-s-OFDM 16<br>QAM    | 1@1 | 23.25 | 22.45 | 0.1758 |
| 78 | 30 | 90 | 633666 | 3504.99 | DFT-s-OFDM PI/2<br>BPSK | 1@1 | 25.17 | 24.37 | 0.2735 |
| 78 | 30 | 90 | 633666 | 3504.99 | DFT-s-OFDM QPSK         | 1@1 | 24.97 | 24.17 | 0.2612 |
| 78 | 30 | 90 | 633666 | 3504.99 | DFT-s-OFDM 16<br>QAM    | 1@1 | 23.25 | 22.45 | 0.1758 |



### Appendix B. Test Results of Radiated Test

#### Radiated Spurious Emission

|                 |           |                     |         |
|-----------------|-----------|---------------------|---------|
| Test Engineer : | Jack zhou | Temperature :       | 23~25°C |
|                 |           | Relative Humidity : | 41~42%  |

RSE pre-scanned harmonic for different antennas, choose the worst antenna perform final test and record in the report.

| SA n77 / NR 100MHz / QPSK / ANT5 |                   |              |               |                   |                    |                      |                       |                    |
|----------------------------------|-------------------|--------------|---------------|-------------------|--------------------|----------------------|-----------------------|--------------------|
| Channel                          | Frequency ( MHz ) | EIRP ( dBm ) | Limit ( dBm ) | Over Limit ( dB ) | S.G. Power ( dBm ) | TX Cable loss ( dB ) | TX Antenna Gain (dBi) | Polarization (H/V) |
| Middle                           | 6900              | -49.40       | -13           | -36.40            | -59.61             | 3.03                 | 13.24                 | H                  |
|                                  | 10356             | -36.12       | -13           | -23.12            | -45.57             | 3.56                 | 13.01                 | H                  |
|                                  | 13800             | -33.79       | -13           | -20.79            | -43.31             | 3.92                 | 13.44                 | H                  |
|                                  | 6900              | -48.95       | -13           | -35.95            | -59.16             | 3.03                 | 13.24                 | V                  |
|                                  | 10356             | -38.89       | -13           | -25.89            | -48.34             | 3.56                 | 13.01                 | V                  |
|                                  | 13800             | -36.23       | -13           | -23.23            | -45.75             | 3.92                 | 13.44                 | V                  |

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

| EN-DC_30A_n77A / LTE 10MHz + NR 100MHz / QPSK / ANT0(LTE) & ANT5(NR) |                   |              |               |                   |                    |                      |                       |                    |
|--|-------------------|--------------|---------------|-------------------|--------------------|----------------------|-----------------------|--------------------|
| Channel  | Frequency ( MHz ) | EIRP ( dBm ) | Limit ( dBm ) | Over Limit ( dB ) | S.G. Power ( dBm ) | TX Cable loss ( dB ) | TX Antenna Gain (dBi) | Polarization (H/V) |
| Middle   | 6900              | -48.60       | -13           | -35.60            | -58.81             | 3.03                 | 13.24                 | H                  |
|  | 10356             | -48.66       | -13           | -35.66            | -58.11             | 3.56                 | 13.01                 | H                  |
|  | 13800             | -42.25       | -13           | -29.25            | -51.77             | 3.92                 | 13.44                 | H                  |
|  | 17256             | -46.51       | -13           | -33.51            | -54.95             | 5.38                 | 13.82                 | H                  |
|  | 6900              | -56.58       | -13           | -43.58            | -66.79             | 3.03                 | 13.24                 | V                  |
|  | 10356             | -44.70       | -13           | -31.70            | -54.15             | 3.56                 | 13.01                 | V                  |
|  | 13800             | -52.52       | -13           | -39.52            | -62.04             | 3.92                 | 13.44                 | V                  |
|  | 17256             | -51.78       | -13           | -38.78            | -60.22             | 5.38                 | 13.82                 | V                  |

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.