



1. Product picture

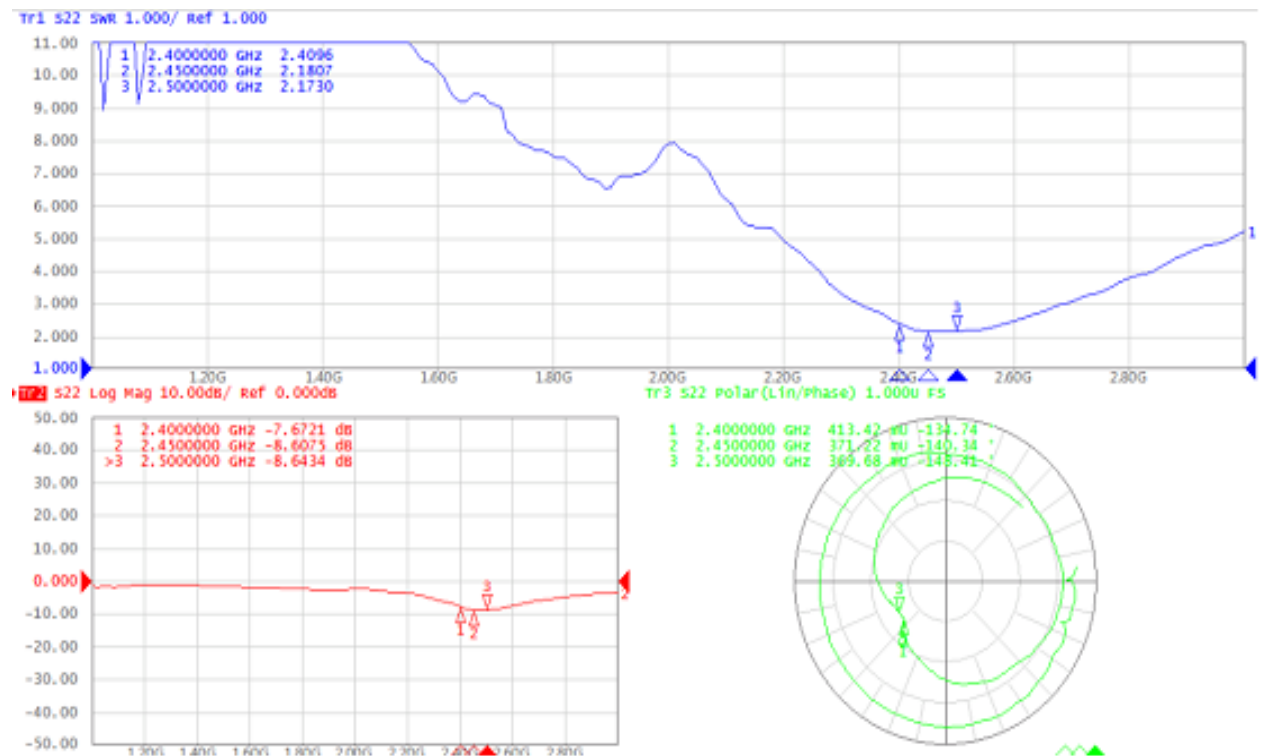

2. VSWR:

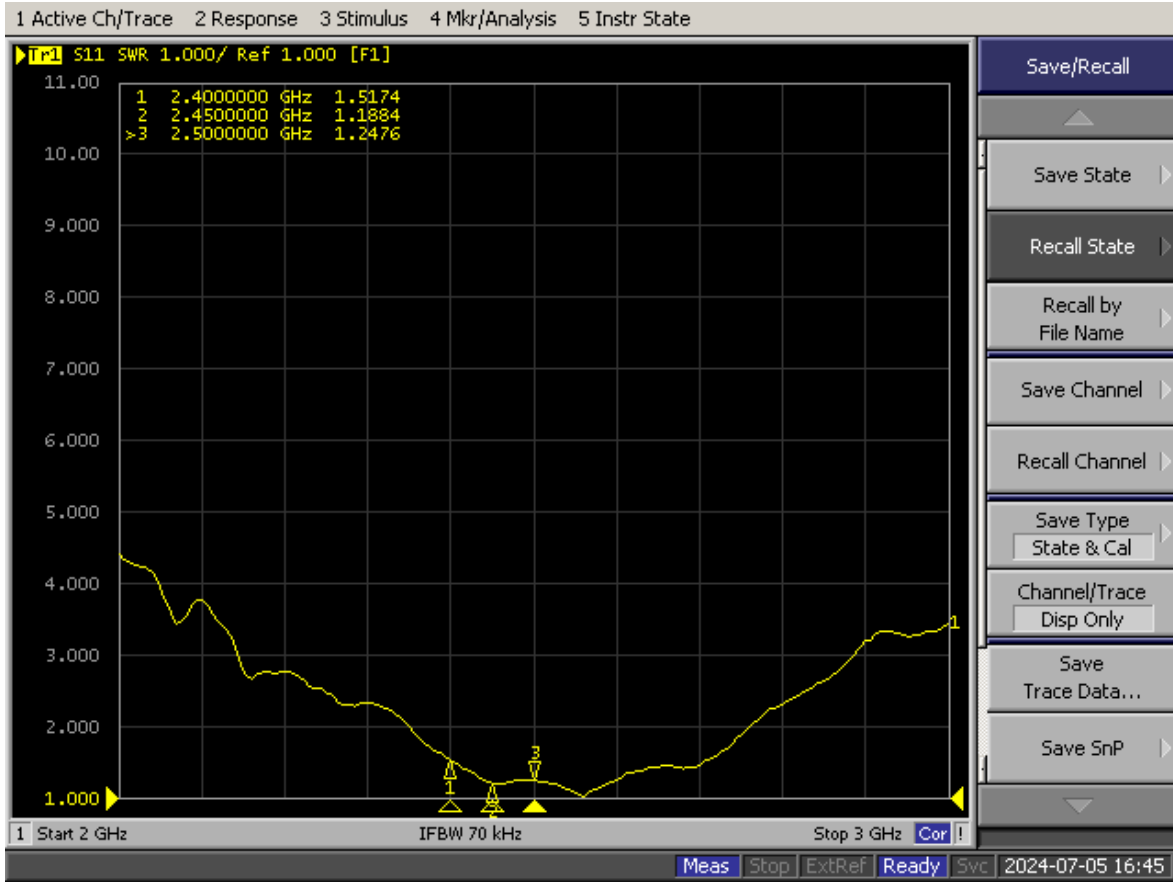

3.Product performance parameter:

Electrical Specifications	
Frequency Range (MHz)	2400-2500
Input Impedence (Ω)	50
V.S.W.R	≤ 2.0
Gain (dBi)	3.0 ± 0.5
Polarization Type	垂直 Vertical
Maximum power(W)	10W
Vertical lobe Angle (E)	45~60°
Water plane lobe Angle (H)	360°
Mechanical Specifications	
Connect Type	SMA-J (弯)
Cable Type	/
Size	48*6.5MM
Operating Temp	-20 ~ +65 °C
Storage Temp	-30 ~ +75°C