

FCC SAR Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2403-4, XT2403-5
FCC ID : IHDT56AQ6
STANDARD : FCC 47 CFR Part 2 (2.1093)

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.



Approved by: Si Zhang



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



Table of Contents

1. Statement of Compliance 4
2. Administration Data 6
3. Data Reuse Approach 7
3.1 Introduction Section 7
3.2 Model Difference Information 7
3.3 Reference detail Section 7
4. Guidance Applied 8
5. Equipment Under Test (EUT) Information 9
5.1 General Information 9
5.2 General LTE SAR Test and Reporting Considerations 11
5.3 General 5G NR SAR Test and Reporting Considerations 15
6. Smart Transmit feature for RF Exposure compliance 17
7. Proximity Sensor Triggering Test 19
8. RF Exposure Limits 21
8.1 Uncontrolled Environment 21
8.2 Controlled Environment 21
9. Specific Absorption Rate (SAR) 22
9.1 Introduction 22
9.2 SAR Definition 22
10. System Description and Setup 23
10.1 E-Field Probe 24
10.2 Data Acquisition Electronics (DAE) 24
10.3 Phantom 25
10.4 Device Holder 26
11. Measurement Procedures 27
11.1 Spatial Peak SAR Evaluation 27
11.2 Power Reference Measurement 28
11.3 Area Scan 28
11.4 Zoom Scan 29
11.5 Volume Scan Procedures 29
11.6 Power Drift Monitoring 29
12. Test Equipment List 30
13. System Verification 31
13.1 Tissue Simulating Liquids 31
13.2 Tissue Verification 31
13.3 System Performance Check Results 32
14. RF Exposure Positions 34
14.1 Ear and handset reference point 34
14.2 Definition of the cheek position 35
14.3 Definition of the tilt position 36
14.4 Body Worn Accessory 37
14.5 Product Specific 10g SAR Exposure 38
14.6 Wireless Router 38
15. Conducted RF Output Power (Unit: dBm) 39
16. Antenna Location 49
17. Spot Check SAR Test Results 50
17.1 Head SAR 53
17.2 Hotspot SAR 56
17.3 Body Worn Accessory SAR 59
17.4 Product specific 10g SAR 62
17.5 Repeated SAR Measurement 65
18. Simultaneous Transmission Analysis 66
18.1 5G NR + LTE + WLAN + BT Sim-Tx analysis 67
18.2 Sub6 Antenna Groups 68
18.3 Head Exposure Conditions 69
18.4 Hotspot Exposure Conditions 71
18.5 Body-Worn Accessory Exposure Conditions 74
18.6 Product specific 10g SAR Exposure Conditions 76
18.7 SPLSR Evaluation and Analysis 79
18.8 Maximum Report SAR And SAR Peak Locations 88
19. Supplemental Tuner Tests Results 96
20. Uncertainty Assessment 97
21. References 99



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Motorola Mobility LLC, Mobile Cellular Phone, XT2403-4, XT2403-5**, are as follows.

Highest 1g SAR Summary						
Equipment Class	Frequency Band		Head (Separation 0mm)	Hotspot (Separation 5mm)	Body-worn (Separation 5mm)	Highest Simultaneous Transmission 1g SAR (W/kg)
			1g SAR (W/kg)			
Licensed	GSM	GSM850	0.84	0.97	0.97	1.59
		GSM1900	0.84	1.28	1.30	
	WCDMA	WCDMA II	0.89	1.28	1.30	
		WCDMA IV	0.88	1.29	1.28	
		WCDMA V	0.88	1.27	1.27	
	LTE	LTE Band 2	0.86	0.99	1.17	
		LTE Band 66/4	0.88	1.27	1.29	
		LTE Band 26/5	0.88	0.72	0.76	
		LTE Band 7	0.88	1.29	1.29	
		LTE Band 12/17	0.89	0.85	0.87	
		LTE Band 41/38	0.90	1.30	1.30	
	5G NR	LTE Band 42	0.89	0.59	0.62	
		FR1 n5	0.89	0.74	0.87	
		FR1 n66	0.88	1.29	1.30	
FR1 n41		0.88	1.28	1.27		
DTS	WLAN	FR1 n77/n78	0.88	1.27	0.88	
		2.4GHz WLAN	1.29	0.60	1.30	
		5GHz WLAN	1.11	0.64	1.19	
NII	WLAN	6GHz WLAN	0.39	0.17	1.59	
6XD		2.4GHz Bluetooth	0.49	0.29	0.29	
DSS	Bluetooth	2.4GHz Bluetooth	0.49	0.29	0.29	1.59

Highest 10g SAR Summary				
Equipment Class	Frequency Band		Product Specific 10g SAR (W/kg) (Separation 0mm)	Highest Simultaneous Transmission 10g SAR (W/kg)
Licensed	GSM	GSM850	1.89	3.75
		GSM1900	2.53	
	WCDMA	WCDMA II	3.11	
		WCDMA IV	3.14	
		WCDMA V	1.86	
	LTE	LTE Band 2	3.02	
		LTE Band 66/4	3.14	
		LTE Band 7	3.21	
		LTE Band 41/38	3.16	
		LTE Band 42	2.22	
	5G NR	FR1 n66	3.13	
FR1 n41		3.16		
FR1 n77/n78		3.19		
DTS	WLAN	2.4GHz WLAN	1.73	3.75
NII		5GHz WLAN	3.15	3.75
6XD		6GHz WLAN	0.13	3.75
Equipment Class	Frequency Band	Head Measured APD (W/m^2)	Body-worn Measured APD (W/m^2)	Product Specific Measured APD (W/m^2)
6XD	6GHz WLAN	1.76	0.78	1.89



Date of Testing:	2024/1/5 ~ 2024/2/5
------------------	---------------------

Remark:

1. This device supports LTE B4 / B5 / B17 / B38 and B66 / B26 / B12 / B41. Since the supported frequency span for LTE B4 / B5 / B17 / B38 falls completely within the supports frequency span for LTE B66 / B26 / B12 / B41, both LTE bands have the same target power, and both LTE bands share the same transmission path; therefore, SAR was only assessed for LTE B66 / B26 / B12 / B41.
2. This device supports 5GNR n78 and n77. Since the supported frequency span for 5GNR n78 falls completely within the supports frequency span for n77, both 5GNR bands have the same target power, and both 5GNR bands share the same transmission path; therefore, SAR was only assessed for n77.

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.



2. Administration Data

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Testing Laboratory			
Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	SAR04-KS SAR07-KS	CN1257	314309

Applicant	
Company Name	Motorola Mobility LLC
Address	222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

Manufacturer	
Company Name	Motorola Mobility LLC
Address	222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

3. Data Reuse Approach

3.1 Introduction Section

This application re-uses data collected on a similar device, FCC ID: IHDT56AQ5 (reference model) and FCC ID: IHDT56AQ6 (variant model). Due to the same design are identical between parent model and variant model, SAR data reuse is requested and spot check data in this report is used to justify the SAR data reuse.

Per KDB 484596 D01 v02r02, the deviation of variant model 1g SAR and 10g SAR spot check result was no larger than 3 dB, the WWAN/WLAN/BT maximum SAR summary was always choose the higher SAR between parent model and variant model.

The applicant should take full responsibility that the test data as referenced in this report represent compliance for this FCC ID: IHDT56AQ6

3.2 Model Difference Information

The **main** difference between FCC ID: IHDT56AQ5 and FCC ID: IHDT56AQ6 is as below:

- Removed LTE B13/20/32/43/48 and 5G NR n2/n7/n20/n26/n38/n40.
- Added LTE B11.
- NFC Chipset silk-screen and Firmware are different.

Other differences and all the details of similarity and difference can be found in the confidential documents (XT2403-4, XT2403-5_Operational Description of Product Equality Declaration).

3.3 Reference detail Section

Rule Part	Equipment Class	Wireless Technology	Frequency Band (MHz)	FCC ID (Reference)	Type Grant/ Permissive Change	Reference Title	FCC ID Filling (Variant)	Test on the variant
Part 2.1093	PCE	GSM	GSM850/1900	IHDT56AQ5	Original Grant	FA3D1818	IHDT56AQ6	Spot check
		WCDMA	B2/4/5	IHDT56AQ5	Original Grant	FA3D1818	IHDT56AQ6	Spot check
		LTE	B2				IHDT56AQ6	Full Test
		LTE	B4/5/7/12/17/26/66 B38/41/42	IHDT56AQ5	Original Grant	FA3D1818	IHDT56AQ6	Spot check
		5G NR	n5/n66 /n41/n77/n78	IHDT56AQ5	Original Grant	FA3D1818	IHDT56AQ6	Spot check
	DTS	BLE/ Wi-Fi	2400~2483.5	IHDT56AQ5	Original Grant	FA3D1818	IHDT56AQ6	Spot check
	NII	Wi-Fi	5150 ~ 5250 5250 ~ 5350 5470 ~ 5725 5725 ~ 5850	IHDT56AQ5	Original Grant	FA3D1818	IHDT56AQ6	Spot check
	DSS	Bluetooth	2400~2483.5	IHDT56AQ5	Original Grant	FA3D1818	IHDT56AQ6	Spot check
	6XD	Wi-Fi	5925 ~ 7125	IHDT56AQ5	Original Grant	FA3D1818	IHDT56AQ6	Spot check on SAR, full test on PD
	DXX	NFC	13.56				IHDT56AQ6	Full Test
	DCD	WPT	0.110~0.148	IHDT56AQ5	Original Grant	FA3D1830	IHDT56AQ6	Spot check



4. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- IEC/IEEE 62209-1528:2020
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01
- FCC KDB 484596 D01 Referencing Test Data v02r02



5. Equipment Under Test (EUT) Information

5.1 General Information

Product Feature & Specification	
Equipment Name	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2403-4, XT2403-5
FCC ID	IHDT56AQ6
IMEI Code	IMEI1: 350950830009116 IMEI2: 350950830009124
Wireless Technology and Frequency Range	GSM850: 824 MHz ~ 849 MHz GSM1900: 1850 MHz ~ 1910 MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 42: 3450 MHz ~ 3550 MHz LTE Band 66: 1710 MHz ~ 1780 MHz 5G NR n5: 824 MHz ~ 849 MHz 5G NR n41: 2496 MHz ~ 2690 MHz 5G NR n66: 1710 MHz ~ 1780 MHz 5G NR n77: 3700 MHz ~ 3980 MHz 5G NR n78: 3700 MHz ~ 3800 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC: 13.56 MHz WPT: 110 kHz ~ 148 kHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA HSPA+(16QAM uplink is not supported) LTE: QPSK, 16QAM, 64QAM, 256QAM 5G NR : CP-OFDM / DFT-s-OFDM, PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 2.4GHz 802.11ax HE20/HE40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac/ax VHT20/VHT40/VHT80/VHT160/HE20/HE40/HE80/HE160 WLAN 6GHz 802.11a/ax HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE NFC: ASK WPT: ASK
HW Version	DVT2
SW Version	U2UM34.9
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype

Remark:

1. This device supports VoIP in GPRS, EGPRS, WCDMA, LTE and 5G NR (e.g. for 3rd-party VoIP), LTE supports VoLTE operation.
2. This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications.
3. This device 5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WiFi Direct (GC/GO), and 5.3GHz / 5.5GHz supports WiFi Direct (GC only).
4. This device does not support DTM operation and supports GPRS/EGPRS mode up to multi-slot class 12.
5. The 2.4GHz/5GHz/6GHz WLAN can transmit in MIMO antenna mode only.
6. For dual SIM card mobile has single SIM slots + eSIM (electronic SIM) and supports dual SIM dual standby. The WWAN radio transmission will be enabled by either one SIM at a time (single active).
7. The device implements the power management and proximity sensor /receiver detection/hotspot mode for SAR compliance at different exposure conditions (head, body-worn, hotspot, extremity) and the Qualcomm smart transmit will manage to ensure the power level not exceeding the associated power table. Details about the power management decision and sensor detection are provided in the operational description. And the device will invoke corresponding work scenarios power level base on frequency bands/antennas, which can refer to power table at appendix E.
8. For WLAN/BT when transmit simultaneous with WWAN/BT, power reduction will be activated to head exposure condition. For WLAN/BT when transmit simultaneous with WWAN and Proximity sensors trigger, power reduction will be activated to body-worn and extremity exposure conditions.
9. This device implements antenna tuning techniques for several WWAN (cellular) operating modes and frequencies for the purpose of improving antenna efficiency over a broad range of frequencies. Specifically, these techniques are employed in the LTE and 5G NR modes. In this report SAR was measured according to the normally required SAR configurations with the tuner active and worst tune state (auto tune) was used for SAR testing. The detail descriptions of the antenna tuner and supplemental data for additional information can be referred to section 19 reference model test report.
10. LTE Band 38/41 supports HPUE, HPUE power and SAR testing performed separately.
11. LTE Band 38/41 HPUE with higher power, For HPUE power is higher than power class 3 but with lower duty cycle, the maximum average power for class 2 and class 3 is almost the same, so we chose power class 3 full SAR testing and power class 2 verified the worst case of power class 3 SAR.
12. For 5G NR test, using FTM (Factory Test Mode) to perform SAR with default 100% transmission.
13. The different model name is different for market purpose, all the others are the same.
14. This device has NFC function and the NFC SAR report will be separately submitted.
15. This device supports 5G NR FR1 bands as following table, including NSA mode and SA mode. NSA and SA mode performed SAR separately.

<5G NR>

Mode	Band	Duplex	SCS(KHz)	Bandwidths(BW)
NSA	n5	FDD	15	5, 10, 15, 20
	n41	TDD	30	10, 15, 20, 30, 40, 50, 60, 70, 80, 90, 100
	n77	TDD	30	10, 15, 20, 30, 40, 50, 60, 70, 80, 90, 100
	n78	TDD	30	10, 15, 20, 30, 40, 50, 60, 70, 80, 90, 100
SA	n5	FDD	15	5, 10, 15, 20
	n66	FDD	15	5, 10, 15, 20, 25, 30, 35, 40
	n41	TDD	30	10, 15, 20, 30, 40, 50, 60, 70, 80, 90, 100
	n77	TDD	30	10, 15, 20, 30, 40, 50, 60, 70, 80, 90, 100
	n78	TDD	30	10, 15, 20, 30, 40, 50, 60, 70, 80, 90, 100



5.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																															
FCC ID	IHDT56AQ6																																																														
Equipment Name	Mobile Cellular Phone																																																														
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 42: 3450 MHz ~ 3550 MHz LTE Band 66: 1710 MHz ~ 1780 MHz																																																														
Channel Bandwidth	LTE Band 2: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 26: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 42: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 66: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz																																																														
uplink modulations used	QPSK / 16QAM / 64QAM / 256QAM																																																														
LTE Voice / Data requirements	Voice and Data																																																														
LTE Release Version	R16, Cat18																																																														
CA Support	Supported, Uplink and Downlink																																																														
LTE MPR permanently built-in by design	<p>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table>	Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																								
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																									
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																								
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																								
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																								
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																								
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																								
256 QAM	≥ 1						≤ 5																																																								
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																														
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																														
Power reduction applied to satisfy SAR compliance	Yes, when operating in Proximity sensors/receiver/hotspot detect mechanism, head/body-worn /hotspot/extremity will trigger reduced power for some bands applied to satisfy SAR compliance, the detail please referred to section 15.																																																														
LTE Carrier Aggregation Combinations	Inter-Band and Intra-Band possible combinations and the detail power verification please referred to section 15.																																																														
LTE Carrier Aggregation Additional Information	1. This device supports LTE Carrier Aggregation (CA) in the uplink for intra-band and inter-band with two component carriers in the uplink. SAR Measurements and conducted powers were evaluated per FCC Guidance. 2. This device supports maximum of 4 carriers in the downlink and 2 carriers in the uplink.																																																														



Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5
H	20643	848.3	20635	847.5	20625	846.5	20600	844				
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510				
M	21100	2535	21100	2535	21100	2535	21100	2535				
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560				
LTE Band 12												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	23017	699.7	23025	700.5	23035	701.5	23060	704				
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5				
H	23173	715.3	23165	714.5	23155	713.5	23130	711				
LTE Band 17												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)		Channel #		Freq. (MHz)		Channel #		Freq. (MHz)	
L	23755		706.5		23780		709					
M	23790		710		23790		710					
H	23825		713.5		23800		711					
LTE Band 26												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5		
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5		
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5		
LTE Band 38												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580				
M	38000	2595	38000	2595	38000	2595	38000	2595				
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610				
LTE Band 41												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506				
LM	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5				
M	40620	2593	40620	2593	40620	2593	40620	2593				
HM	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5				
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680				

LTE Band 66												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770

LTE Band 42									
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	42115	3452.5	42140	3455	42165	3457.5	42190	3460	
M	42590	3500	42590	3500	42590	3500	42590	3500	
H	43065	3547.5	43040	3545	43015	3542.5	42990	3540	

<For LTE Overlap Bands Description>

1) LTE Bands BW

Band	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz
LTE Band 4	Yes	Yes	Yes	Yes	Yes	Yes
LTE Band 66	Yes	Yes	Yes	Yes	Yes	Yes
LTE Band 12	Yes	Yes	Yes	Yes		
LTE Band 17			Yes	Yes		
LTE Band 5	Yes	Yes	Yes	Yes		
LTE Band 26	Yes	Yes	Yes	Yes	Yes	
LTE Band 38			Yes	Yes	Yes	Yes
LTE Band 41			Yes	Yes	Yes	Yes

2) LTE Bands tune up:

Band	Antenna	Head DSI 2 Tune-up Limit	Body-worn DSI 3 Tune-up Limit	Hotspot DSI 7 Tune-up Limit	Extremity DSI 6 Tune-up Limit	Sensor Off DSI4 Tune-up Limit	Default Tune-up Limit
LTE Band 12	Ant 0	24	24	24	24	24	24
LTE Band 17	Ant 0	24	24	24	24	24	24
LTE Band 26	Ant 0	24	24	24	24	24	24
LTE Band 5	Ant 0	24	24	24	24	24	24
LTE Band 38	Ant 0	23	22.8	19.9	22.5	23	23
LTE Band 41	Ant 0	23	22.8	19.9	22.5	23	23
LTE Band 38 HPUE	Ant 0	26	24.4	21.5	24.1	26	26
LTE Band 41 HPUE	Ant 0	26	24.4	21.5	24.1	26	26

Band	Antenna	Head DSI 2 Tune-up Limit	Body-worn DSI 3 Tune-up Limit	Hotspot DSI 7 Tune-up Limit	Extremity DSI 6 Tune-up Limit	Sensor Off DSI4 Tune-up Limit	Default Tune-up Limit
LTE Band 12	Ant 1	22	24	23	24	24	24
LTE Band 17	Ant 1	22	24	23	24	24	24
LTE Band 26	Ant 1	21.1	24	22.9	24	24	24
LTE Band 5	Ant 1	21.1	24	22.9	24	24	24
LTE Band 4	Ant 1	16.3	15.7	13.9	19.3	22.5	22.5
LTE Band 66	Ant 1	16.3	15.7	13.9	19.3	22.5	22.5
LTE Band 38	Ant 1	15.8	18.4	13.9	20.5	23	23
LTE Band 41	Ant 1	15.8	18.4	13.9	20.5	23	23
LTE Band 38 HPUE	Ant 1	17.4	20	15.5	22.1	26	26
LTE Band 41 HPUE	Ant 1	17.4	20	15.5	22.1	26	26



Band	Antenna	Head DSI 2 Tune-up Limit	Body-worn DSI 3 Tune-up Limit	Hotspot DSI 7 Tune-up Limit	Extremity DSI 6 Tune-up Limit	Sensor Off DSI4 Tune-up Limit	Default Tune-up Limit
LTE Band 4	Ant 2	24	21	19.9	22.9	24	24
LTE Band 66	Ant 2	24	21	19.9	22.9	24	24
LTE Band 38	Ant 2	23.5	23.5	22.5	23.5	23.5	23.5
LTE Band 41	Ant 2	23.5	23.5	22.5	23.5	23.5	23.5
LTE Band 38 HPUE	Ant 2	26.5	25.1	24.1	25.5	26.5	26.5
LTE Band 41 HPUE	Ant 2	26.5	25.1	24.1	25.5	26.5	26.5

Band	Antenna	Head DSI 2 Tune-up Limit	Body-worn DSI 3 Tune-up Limit	Hotspot DSI 7 Tune-up Limit	Extremity DSI 6 Tune-up Limit	Sensor Off DSI4 Tune-up Limit	Default Tune-up Limit
LTE Band 38	Ant 10	23.3	22	19.2	22	22	24
LTE Band 41	Ant 10	23.3	22	19.2	22	22	24
LTE Band 38 HPUE	Ant 10	24.9	23.6	20.8	23.6	23.6	27
LTE Band 41 HPUE	Ant 10	24.9	23.6	20.8	23.6	23.6	27



5.3 General 5G NR SAR Test and Reporting Considerations

5G NR Information	
Operating Frequency Range of each 5G NR transmission band	5G NR n5: 824 MHz ~ 849 MHz 5G NR n41: 2496 MHz ~ 2690 MHz 5G NR n66: 1710 MHz ~ 1780 MHz 5G NR n77: 3700 MHz ~ 3980 MHz 5G NR n78: 3700 MHz ~ 3800 MHz
Channel Bandwidth	The detail please refers to section 4.1 5GNR FR1 bands table.
SCS	FDD: SCS15KHz, TDD: SCS30KHz
uplink modulations used	DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM
A-MPR (Additional MPR) disabled for SAR Testing?	Yes
LTE Anchor Bands for n5	LTE B66
LTE Anchor Bands for n41	LTE B66
LTE Anchor Bands for n77	LTE B41
LTE Anchor Bands for n78	LTE B41

NR Band 5								
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	165300	826.5	165800	829	166300	831.5	166800	834
M	167300	836.5	167300	836.5	167300	836.5	167300	836.5
H	169300	846.5	168800	844	168300	841.5	167800	839

NR Band 66																
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 25MHz		Bandwidth 30MHz		Bandwidth 35MHz		Bandwidth 40MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	342500	1712.5	343000	1715	343500	1717.5	344000	1720	344500	1722.5	345000	1725	345500	1727.5	346000	1730
M	349000	1745	349000	1745	349000	1745	349000	1745	349000	1745	349000	1745	349000	1745	349000	1745
H	355500	1777.5	355000	1775	354500	1772.5	354000	1770	353500	1767.5	353000	1765	352500	1762.5	352000	1760

NR Band 41 SCS30KHz																						
	Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 30MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 70MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth 100MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	500202	2501.01	500700	2503.5	501204	2506.02	502200	2511	503202	2516.01	504204	2521.02	505200	2526	500202	2501.01	507204	2536.02	508200	2541	509202	2546.01
M	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99
H	537000	2685	536496	2682.48	535998	2679.99	534996	2674.98	534000	2670	532998	2664.99	531996	2659.98	537000	2685	529998	2649.99	528996	2644.98	528000	2640

NR Band 77																						
	Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 30MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 70MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth 100MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	647000	3705	647168	3707.52	647334	3710.01	647668	3715.02	648000	3720	648334	3725.01	648668	3730.02	649000	3735	649334	3740.01	649668	3745.02	650000	3750
M	656000	3840	656000	3840	656000	3840	656000	3840.00	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840
H	665000	3975	664832	3972.48	664666	3969.99	664332	3964.98	664000	3960	663666	3954.99	663332	3949.98	663000	3945	662666	3939.99	662332	3934.98	662000	3930

NR Band 78																						
	Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 30MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 70MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth 100MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	647000	3705	647168	3707.52	647334	3710.01	647668	3715.02	648000	3720	648334	3725.01	648668	3730.02	649000	3735	649334	3740.01	649668	3745.02		
M	650000	3750	650000	3750	650000	3750	650000	3750.00	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750
H	653000	3795	652834	3792.51	652668	3790.02	652334	3785.01	652000	3780	651668	3775.02	651334	3770.01	651000	3765	650668	3760.02	650334	3755.01		

<For NR Overlap Bands Description>

1) NR Bands BW

Band	5 MHz	10 MHz	15 MHz	20 MHz	25 MHz	30 MHz	40 MHz	50 MHz	60 MHz	70 MHz	80 MHz	90 MHz	100 MHz
FR1 n5	Yes	Yes	Yes	Yes									
FR1 n41		Yes	Yes	Yes		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
FR1 n77		Yes	Yes	Yes		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
FR1 n78		Yes	Yes	Yes		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes

2) NR Bands Tune up:

Band	Antenna	Head DSI 2 Tune-up Limit	Body-worn DSI 3 Tune-up Limit	Hotspot DSI 7 Tune-up Limit	Extremity DSI 6 Tune-up Limit	Sensor Off DSI4 Tune-up Limit	Default Tune-up Limit
5G NR n77	Ant 4	24	19	17.5	24	24	24
5G NR n78	Ant 4	24	19	17.5	24	24	24

Band	Antenna	Head DSI 2 Tune-up Limit	Body-worn DSI 3 Tune-up Limit	Hotspot DSI 7 Tune-up Limit	Extremity DSI 6 Tune-up Limit	Sensor Off DSI4 Tune-up Limit	Default Tune-up Limit
5G NR n77	Ant 5	15.6	17.8	13.5	19.4	24	24
5G NR n78	Ant 5	15.6	17.8	13.5	19.4	24	24

Band	Antenna	Head DSI 2 Tune-up Limit	Body-worn DSI 3 Tune-up Limit	Hotspot DSI 7 Tune-up Limit	Extremity DSI 6 Tune-up Limit	Sensor Off DSI4 Tune-up Limit	Default Tune-up Limit
5G NR n77	Ant 7	17.7	19.5	15.4	19.5	24	24
5G NR n78	Ant 7	17.7	19.5	15.4	19.5	24	24

Band	Antenna	Head DSI 2 Tune-up Limit	Body-worn DSI 3 Tune-up Limit	Hotspot DSI 7 Tune-up Limit	Extremity DSI 6 Tune-up Limit	Sensor Off DSI4 Tune-up Limit	Default Tune-up Limit
5G NR n77	Ant 8	24	23.3	21.3	23.3	23.3	24
5G NR n78	Ant 8	24	23.3	21.3	23.3	23.3	24

6. Smart Transmit feature for RF Exposure compliance

The 2nd generation of Smart Transmit (GEN2) operates based on pre-defined sub6 antenna groups (AG). This Device is enabled with the Qualcomm® Smart Transmit Gen2 feature. The RF exposure limit is defined based on time-averaged RF exposure. The product implements Qualcomm Smart Transmit feature which controls the instantaneous transmitting power for WWAN transmitter to ensure the product in compliance with RF exposure limit over a defined time window, for SAR (transmit frequency ≤ 6GHz). To control and manage transmitting power in real time and to ensure at all times the time-averaged RF exposure is compliant to the regulation requirement.

Note that WLAN/BT operations are not enabled with Smart Transmit.

This report describes the procedures for the SAR char generation, and the parameters obtained from SAR characterization (referred to as SAR char, respectively) will be used as input for Smart Transmit. SAR char will be entered via the Embedded File System (EFS) to enable the Smart Transmit Gen2 Feature.

<Terminologies in this report>

P_{limit}	The time-averaged RF power which corresponds to SAR_design_target.
P_{max}	Maximum target power level
SAR_design_target:	The design target for SAR compliance. It should be less than regulatory SAR limit to account for all device design related uncertainty.
SAR char	P _{limit} for all the technologies/bands for all applicable DSI

<SAR Characterization>

SAR char must be generated to cover all radio configurations and usage scenarios that the wireless device supports for operating at 6 GHz or below. It will then be used as input for Smart Transmit to control and manage RF exposure for f < 6 GHz.

<SAR design target and uncertainty>

Item	Uncertainty dB (k=2)
Total uncertainty	1.5

To account for total uncertainty, SAR_design_target should be determined as:

$$SAR_{design_target} < SAR_{regulatory_limit} \times 10^{\frac{-total\ uncertainty}{10}}$$

Antenna Group:

Antenna Group 0 (AG0)	ANT1 & ANT4 & ANT5 & ANT7 & ANT10
Antenna Group 1 (AG1)	ANT0 & ANT2 & ANT8



The Smart Transmit algorithm maintains the time-averaged transmit power, in turn, time-averaged RF exposure of SAR_design_target, below the predefined time-averaged power limit, for each characterized technology and band.

Smart Transmit allows the device to transmit at higher power instantaneously, as high as Pmax, when needed, but enforces power limiting to maintain time-averaged transmit power to Plimit. Below table shows Plimit EFS settings and maximum tune up output power Pmax configured for this EUT for various transmit conditions (Device State Index DSI).

<P_{limit} for supported technologies and bands (P_{limit} in EFS file)>

Band	Antenna	Head DSI 2	Body-Worn DSI 3	Hotspot DSI 7	Extremity DSI 6	Sensor off DSI 4	Pmax*
GSM850	Ant 0	33.6	23.9	23.9	27.0	24.7	24.7
GSM850	Ant 1	20.5	23.4	21.8	24.5	24.5	24.5
GSM1900	Ant 1	14.6	15.1	13.3	17.0	19.7	19.7
GSM1900	Ant 2	32.3	20.7	19.4	21.7	20.7	20.7
WCDMA II	Ant 1	13.7	13.1	11.6	17.4	21.5	21.5
WCDMA II	Ant 2	30.9	20.4	19.0	21.8	22.0	22.0
WCDMA IV	Ant 1	14.3	14.7	13.3	18.9	21.5	21.5
WCDMA IV	Ant 2	32.1	19.1	18.2	21.8	22.0	22.0
WCDMA V	Ant 0	31.7	23.1	23.1	23.0	23.0	23.0
WCDMA V	Ant 1	20	23.0	20.3	23.0	23.0	23.0
LTE Band 2	Ant 1	15.3	14.1	13.7	17.5	23.0	23.0
LTE Band 2	Ant 2	30.6	19.4	18.0	21.5	21.5	21.5
LTE Band 66(4)	Ant 1	15.3	14.7	12.9	18.3	21.5	21.5
LTE Band 66(4)	Ant 2	33.5	20.0	18.9	21.9	23.0	23.0
LTE Band 26(5)	Ant 0	31.1	25.5	25.5	23.0	23.0	23.0
LTE Band 26(5)	Ant 1	20.1	23.7	21.9	23.0	23.0	23.0
LTE Band 7	Ant 0	29.7	21.5	20.9	21.1	21.5	21.5
LTE Band 7	Ant 1	12.7	16.1	12.2	17.6	21.5	21.5
LTE Band 7	Ant 2	31.6	21.1	19.4	20.8	23.0	23.0
LTE Band 7	Ant 10	21.9	18.6	17.0	18.6	18.6	23.0
LTE Band 12(17)	Ant 0	31.2	24.8	24.8	23.0	23.0	23.0
LTE Band 12(17)	Ant 1	21	23.1	22.0	23.0	23.0	23.0
LTE Band 41(38)	Ant 0	29.6	19.8	16.9	19.5	21.9	20.0
LTE Band 41(38)HPUE	Ant 0	29.6	19.8	16.9	19.5	21.9	21.4
LTE Band 41(38)	Ant 1	12.8	15.4	10.9	17.5	21.9	20.0
LTE Band 41(38)HPUE	Ant 1	12.8	15.4	10.9	17.5	21.9	21.4
LTE Band 41(38)	Ant 2	31	20.5	19.5	20.9	21.9	20.5
LTE Band 41(38)HPUE	Ant 2	31	20.5	19.5	20.9	21.9	21.9
LTE Band 41(38)	Ant 10	20.3	19.0	16.2	19.0	19.0	21.0
LTE Band 41(38)HPUE	Ant 10	20.3	19.0	16.2	19.0	19.0	22.4
LTE Band 42 Part27Q	Ant 7	16.2	17.4	15.6	17.4	17.4	21.0
FR1 n5	Ant 0	32	25.4	25.4	23.0	23.0	23.0
FR1 n5	Ant 1	22	23.1	22.0	23.0	23.0	23.0
FR1 n66	Ant 1	15.9	15.8	14.0	18.9	23.0	23.0
FR1 n66 other PA	Ant 1	15.9	15.8	14.0	18.9	23.0	23.0
FR1 n66	Ant 2	32.7	20.9	19.2	22.3	23.0	23.0
FR1 n66 other PA	Ant 2	32.7	20.9	19.2	22.3	22.0	22.0
FR1 n41	Ant 0	27.4	19.8	18.6	20.3	21.0	21.0
FR1 n41	Ant 1	13.8	16.3	12.5	19.6	21.5	21.5
FR1 n41	Ant 2	31.6	20.1	18.5	19.8	23.0	23.0
FR1 n41	Ant 10	25.5	23.0	20.3	23.0	23.0	23.0
FR1 n77(78)	Ant 4	18.0	18.0	16.5	23.7	23.0	23.0
FR1 n77(78)	Ant 5	14.6	16.8	12.5	18.4	23.0	23.0

FR1 n77(78)	Ant 7	16.7	18.5	14.4	18.5	18.5	23.0
FR1 n77(78)	Ant 8	29.9	22.3	20.3	22.3	22.3	23.0


Note:

- 1) *Pmax is used for RF tune up procedure. The maximum allowed output power is equal to Pmax + 1.0 dB device uncertainty.
- 2) All Plimit power levels entered in the Table correspond to average power levels after accounting for duty cycle in the case TDD modulation schemes (for e.g., GSM & LTE TDD & NR TDD).
- 3) The max allowed output power is the Plimit + 1.0 dB device uncertainty, and if Plimit is higher than Pmax, the device output power will be Pmax instead.

7. Proximity Sensor Triggering Test

<Proximity Sensor Triggering Distance>:

1. Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed and the tissue-equivalent medium for highest frequency (5850MHz) and lowest (835MHz) frequency was used for proximity sensor triggering testing.
2. Capacitive proximity sensors placed coincident with antenna elements at the top and bottom ends of the phone are utilized to determine when the device comes in proximity of the user's body at the front or back of the device.
3. The output power will reduce to body worn power level when top and bottom sensor pad be detected.
4. The sensors used to detect the proximity of the user's body at the front or back surface of the device use a detection threshold distance. The data shown in the sections below shows the distance(s). When front or back body worn condition is detected reduced power will be active.
5. The device employs proximity sensors also can detect the presence of the user's a finger or hand when handheld state at the front/back/top/bottom/left/right sides of the device. When front/back/top/bottom/left/right sides of handheld condition is detected reduced power will be active.
6. For verification of compliance of power reduction scheme, additional SAR testing with EUT transmitting at full RF power at a conservative trigger distance -1mm was performed:

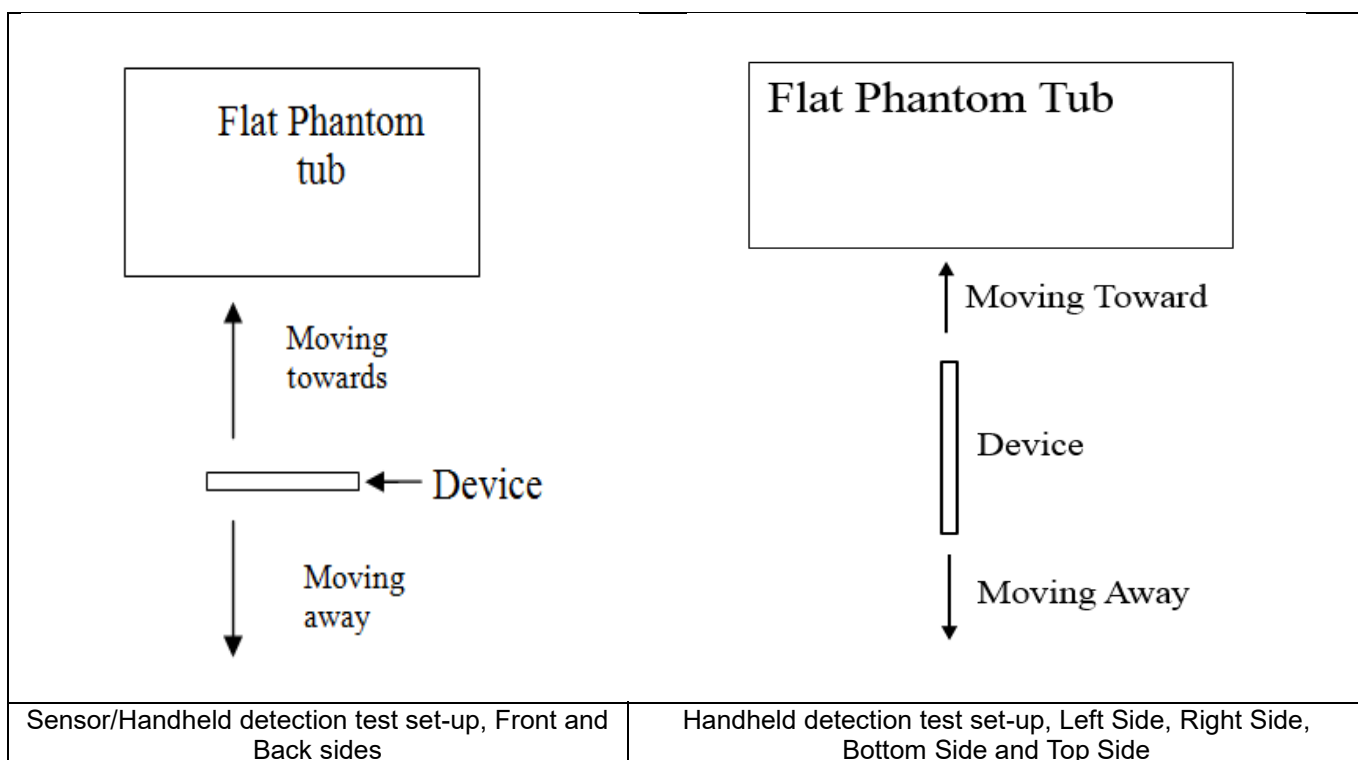

<P-Sensor>

Proximity Sensor Triggering Distance (mm)				
Position	Front		Back	
	Moving towards	Moving away	Moving towards	Moving away
Minimum	17	22	21	25

<Handheld for ANT 0>

Proximity Sensor Triggering Distance (mm)								
Position	Front		Back		Left Side		Bottom Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	7	12	12	17	13	18	14	19

<Handheld for ANT1&7>

Proximity Sensor Triggering Distance (mm)								
Position	Front		Back		Left Side		Top Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	8	14	13	18	10	15	16	20

<Handheld for ANT3&4&5&6>

Proximity Sensor Triggering Distance (mm)								
Position	Front		Back		Right Side		Top Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	11	16	9	15	13	19	11	16

<Handheld for ANT 2>

Proximity Sensor Triggering Distance (mm)						
Position	Front		Back		Bottom Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	7	14	8	14	14	20

8. RF Exposure Limits

8.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

8.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

9. Specific Absorption Rate (SAR)

9.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

9.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

10. System Description and Setup

The DASY5 system used for performing compliance tests consists of the following items:

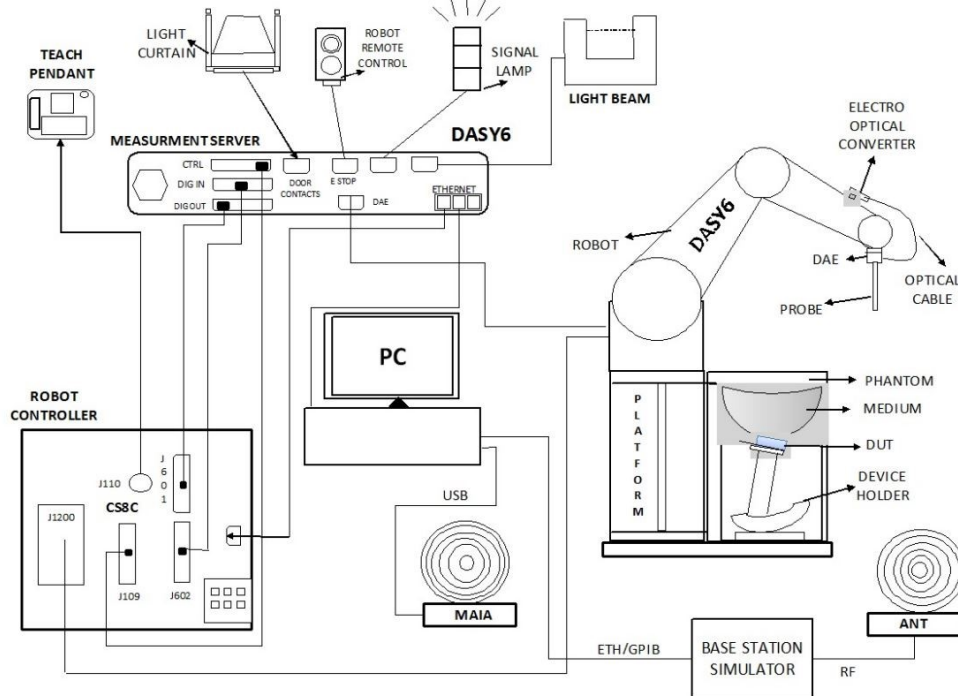


- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7 or Win10 and the DASY5 or DASY6 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

10.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ±0.2 dB (30 MHz – 6 GHz)	
Directivity	±0.3 dB in TSL (rotation around probe axis) ±0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 µW/g – >100 mW/g Linearity: ±0.2 dB (noise: typically <1 µW/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

10.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Photo of DAE


10.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

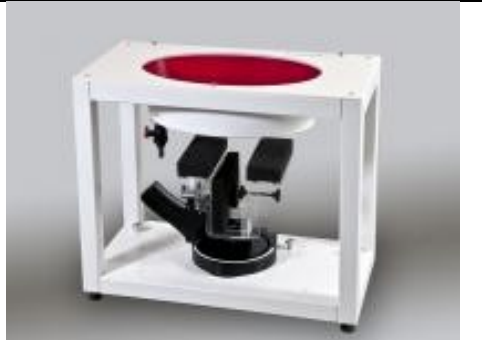Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices or for evaluating transmitters operating at low frequencies. ELI is fully compatible with standard and all known tissue simulating liquids.

10.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

11. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

11.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

11.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

11.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

11.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported SAR</i> from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

11.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

11.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASYS measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

12. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1087	2022/2/24	2025/2/23
SPEAG	835MHz System Validation Kit	D835V2	4d091	2022/8/19	2025/8/18
SPEAG	1750MHz System Validation Kit	D1750V2	1090	2022/2/24	2025/2/23
SPEAG	1900MHz System Validation Kit	D1900V2	5d118	2022/3/30	2025/3/29
SPEAG	2450MHz System Validation Kit	D2450V2	1040	2023/4/25	2024/4/24
SPEAG	2600MHz System Validation Kit	D2600V2	1070	2021/12/20	2024/12/18
SPEAG	3500MHz System Validation Kit	D3500V2	1076	2022/5/9	2025/5/8
SPEAG	3700MHz System Validation Kit	D3700V2	1037	2022/5/9	2025/5/8
SPEAG	3900MHz System Validation Kit	D3900V2	1048	2023/3/9	2024/3/8
SPEAG	5000MHz System Validation Kit	D5GHzV2	1113	2022/9/23	2025/9/22
SPEAG	6500MHz System Validation Kit	D6.5GHzV2	1031	2023/2/22	2024/2/21
SPEAG	Data Acquisition Electronics	DAE4	1649	2023/4/24	2024/4/23
SPEAG	Data Acquisition Electronics	DAE4	1358	2023/2/21	2024/2/20
SPEAG	Dosimetric E-Field Probe	EX3DV4	7706	2023/1/26	2024/1/25
SPEAG	Dosimetric E-Field Probe	EX3DV4	7764	2023/10/5	2024/10/4
SPEAG	SAM Twin Phantom	SAM Twin	TP-2024	NCR	NCR
SPEAG	SAM Twin Phantom	SAM Twin	TP-2022	NCR	NCR
Testo	Thermo-Hygrometer	608-H1	1241332126	2023/7/10	2024/7/9
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Rohde & Schwarz	Signal Generator	SMB100A	100455	2024/1/2	2025/1/1
Keysight	Preamplifier	83017A	MY57280111	2023/7/5	2024/7/4
Anritsu	Radio Communication Analyzer	MT8821C	6262306175	2023/7/5	2024/7/4
Agilent	ENA Series Network Analyzer	E5071C	MY46111157	2023/7/5	2024/7/4
SPEAG	Dielectric Probe Kit	DAK-3.5	1071	2023/2/20	2024/2/19
Anritsu	Vector Signal Generator	MG3710A	6201682672	2023/1/5	2024/1/4
Anritsu	Vector Signal Generator	MG3710A	6201682672	2024/1/2	2025/1/1
Rohde & Schwarz	Power Meter	NRVD	102081	2023/7/5	2024/7/4
Rohde & Schwarz	Power Sensor	NRV-Z5	100538	2023/7/5	2024/7/4
Rohde & Schwarz	Power Sensor	NRV-Z5	100539	2023/7/5	2024/7/4
Rohde & Schwarz	Power Sensor	NRP50S	101385	2023/10/11	2024/10/10
R&S	BLUETOOTH TESTER	CBT	101246	2023/5/15	2024/5/14
Rohde & Schwarz	Spectrum Analyzer	FSV7	101631	2023/10/11	2024/10/10
TES	DIGITAC THERMOMETER	1310	220305411	2023/7/8	2024/7/7
BONN	POWER AMPLIFIER	BLMA 0830-3	087193A	Note 1	
BONN	POWER AMPLIFIER	BLMA 2060-2	087193B	Note 1	
Agilent	Dual Directional Coupler	778D	20500	Note 1	
Agilent	Dual Directional Coupler	11691D	MY48151020	Note 1	
ARRA	Power Divider	A3200-2	N/A	Note 1	
MCL	Attenuation1	BW-S10W5+	N/A	Note 1	
MCL	Attenuation2	BW-S10W5+	N/A	Note 1	
MCL	Attenuation3	BW-S10W5+	N/A	Note 1	

Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check
2. Referring to KDB 865664 D01v01r04, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The justification data of dipole can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.

13. System Verification

13.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 11.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 11.2.

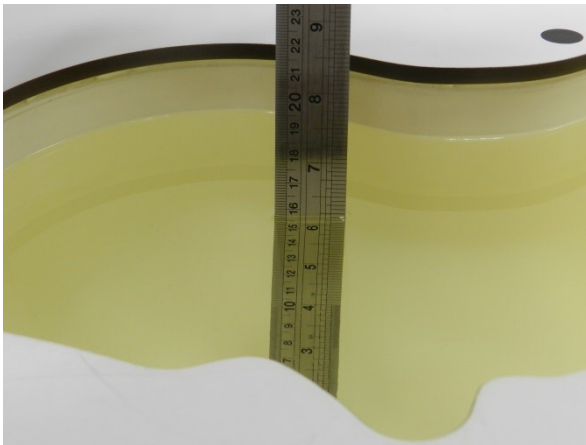


Fig 11.1 Photo of Liquid Height for Head SAR

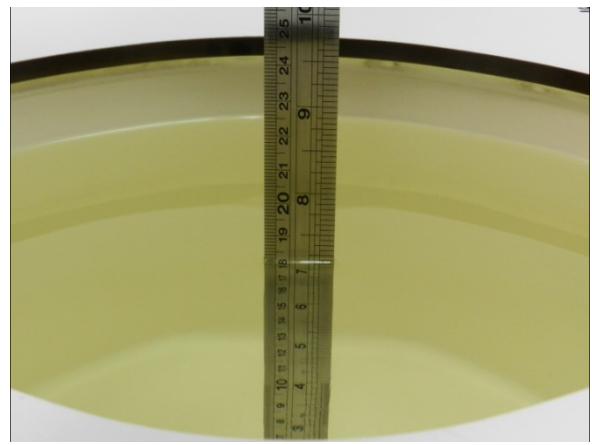


Fig 11.2 Photo of Liquid Height for Body SAR

13.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε _r)	Conductivity Target (σ)	Permittivity Target (ε _r)	Delta (σ) (%)	Delta (ε _r) (%)	Limit (%)	Date
750	Head	22.7	0.925	42.4	0.89	41.90	3.93	1.19	±5	2024/1/5
835	Head	22.8	0.924	41.4	0.90	41.50	2.67	-0.24	±5	2024/1/7
1750	Head	22.7	1.35	40.1	1.37	40.10	-1.46	0.00	±5	2024/1/8
1900	Head	22.9	1.43	39.8	1.40	40.00	2.14	-0.50	±5	2024/1/10
2450	Head	22.6	1.85	39.1	1.80	39.20	2.78	-0.26	±5	2024/1/12
2600	Head	22.6	1.98	39.0	1.96	39.00	1.02	0.00	±5	2024/1/14
3500	Head	22.9	2.80	38.9	2.91	37.90	-3.78	2.64	±5	2024/1/16
3700	Head	22.9	2.98	38.6	3.12	37.70	-4.49	2.39	±5	2024/1/18
3900	Head	22.9	3.18	38.3	3.32	37.50	-4.22	2.13	±5	2024/1/19
5250	Head	22.7	4.56	35.0	4.71	35.90	-3.18	-2.51	±5	2024/1/20
5600	Head	22.7	4.94	34.3	5.07	35.50	-2.56	-3.38	±5	2024/1/21
5750	Head	22.7	5.12	34.1	5.22	35.40	-1.92	-3.67	±5	2024/1/22
6500	Head	22.8	6.16	34.6	6.07	34.50	1.48	0.29	±5	2024/1/23
3500	Head	22.8	2.88	38.600	2.91	37.90	-1.03	1.85	±5	2024/2/5
3700	Head	22.7	3.04	38.300	3.12	37.70	-2.56	1.59	±5	2024/2/5
3900	Head	22.8	3.28	38.100	3.32	37.50	-1.20	1.60	±5	2024/2/5

13.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

<1g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2024/1/5	750	Head	50	1087	7706	1649	0.406	8.58	8.12	-5.36
2024/1/7	835	Head	50	4d091	7706	1649	0.447	9.45	8.94	-5.40
2024/1/8	1750	Head	50	1090	7706	1649	1.73	37.00	34.6	-6.49
2024/1/10	1900	Head	50	5d118	7706	1649	2.11	39.30	42.2	7.38
2024/1/12	2450	Head	50	1040	7706	1649	2.70	52.70	54	2.47
2024/1/14	2600	Head	50	1070	7706	1649	2.63	56.20	52.6	-6.41
2024/1/16	3500	Head	50	1076	7706	1649	3.10	66.20	62	-6.34
2024/1/18	3700	Head	50	1037	7706	1649	3.27	66.70	65.4	-1.95
2024/1/19	3900	Head	50	1048	7706	1649	3.40	69.10	68	-1.59
2024/1/20	5250	Head	50	1113	7706	1649	4.05	81.50	81	-0.61
2024/1/21	5600	Head	50	1113	7706	1649	4.36	82.60	87.2	5.57
2024/1/22	5750	Head	50	1113	7706	1649	3.96	80.80	79.2	-1.98
2024/1/23	6500	Head	50	1031	7706	1649	13.8	297.00	276	-7.07
2024/2/5	3500	Head	50	1076	7764	1358	3.350	66.20	67	1.21
2024/2/5	3700	Head	50	1037	7764	1358	3.340	66.70	66.8	0.15
2024/2/5	3900	Head	50	1048	7764	1358	3.360	69.10	67.2	-2.75

<10g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2024/1/5	750	Head	50	1087	7706	1649	0.272	5.65	5.44	-3.72
2024/1/7	835	Head	50	4d091	7706	1649	0.297	6.22	5.94	-4.50
2024/1/8	1750	Head	50	1090	7706	1649	0.909	19.50	18.18	-6.77
2024/1/10	1900	Head	50	5d118	7706	1649	1.09	20.40	21.8	6.86
2024/1/12	2450	Head	50	1040	7706	1649	1.28	24.60	25.6	4.07
2024/1/14	2600	Head	50	1070	7706	1649	1.18	24.60	23.6	-4.07
2024/1/16	3500	Head	50	1076	7706	1649	1.18	25.50	23.6	-7.45
2024/1/18	3700	Head	50	1037	7706	1649	1.22	24.60	24.4	-0.81
2024/1/19	3900	Head	50	1048	7706	1649	1.23	24.10	24.6	2.07
2024/1/20	5250	Head	50	1113	7706	1649	1.18	23.30	23.6	1.29
2024/1/21	5600	Head	50	1113	7706	1649	1.26	23.70	25.2	6.33
2024/1/22	5750	Head	50	1113	7706	1649	1.15	23.00	23	0.00
2024/1/23	6500	Head	50	1031	7706	1649	2.59	54.80	51.8	-5.47
2024/2/5	3500	Head	50	1076	7764	1358	1.320	25.50	26.4	3.53
2024/2/5	3700	Head	50	1037	7764	1358	1.220	24.60	24.4	-0.81
2024/2/5	3900	Head	50	1048	7764	1358	1.200	24.10	24	-0.41

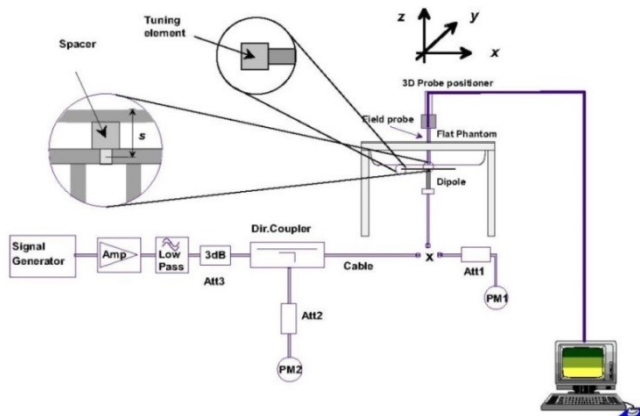


Fig 11.3.1 System Performance Check Setup



Fig 11.3.2 Setup Photo

14. RF Exposure Positions

14.1 Ear and handset reference point

Figure 12.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 12.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 12.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 12.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

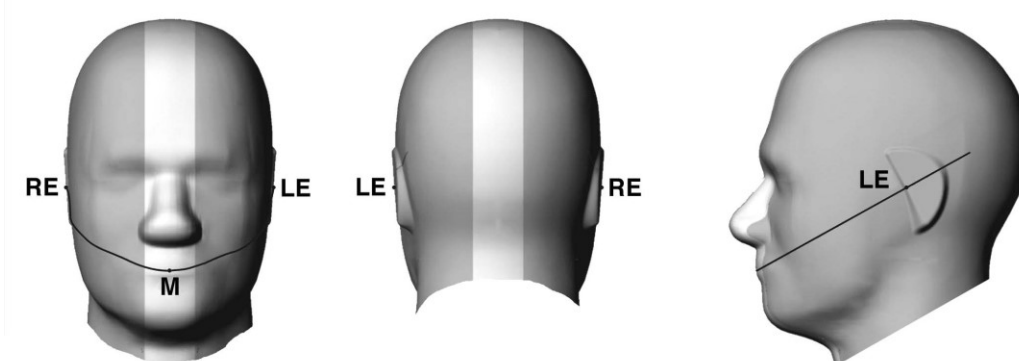


Fig 12.1.1 Front, back, and side views of SAM twin phantom

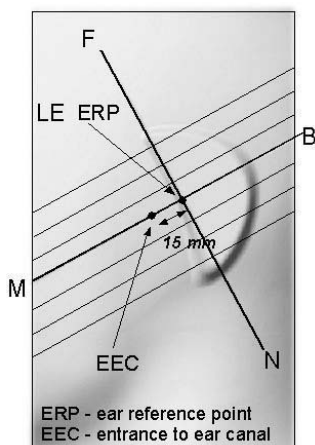


Fig 12.1.2 Close-up side view of phantom showing the ear region.

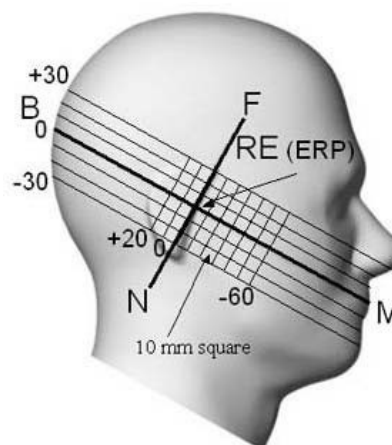


Fig 12.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

14.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 12.2.1 and Figure 12.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 12.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 12.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 12.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 12.2.3. The actual rotation angles should be documented in the test report.

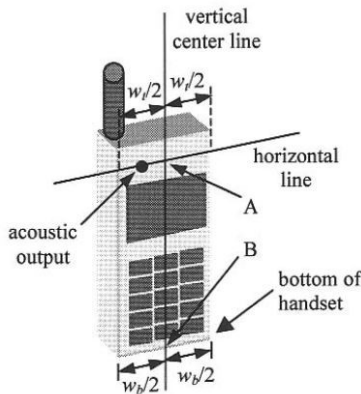


Fig 12.2.1 Handset vertical and horizontal reference lines—“fixed case”

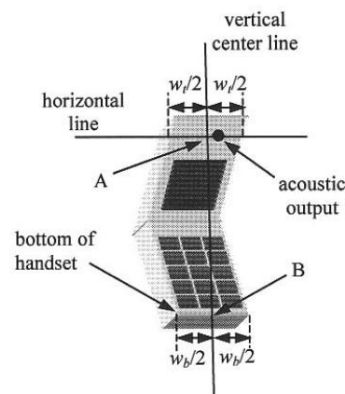


Fig 12.2.2 Handset vertical and horizontal reference lines—“clam-shell case”

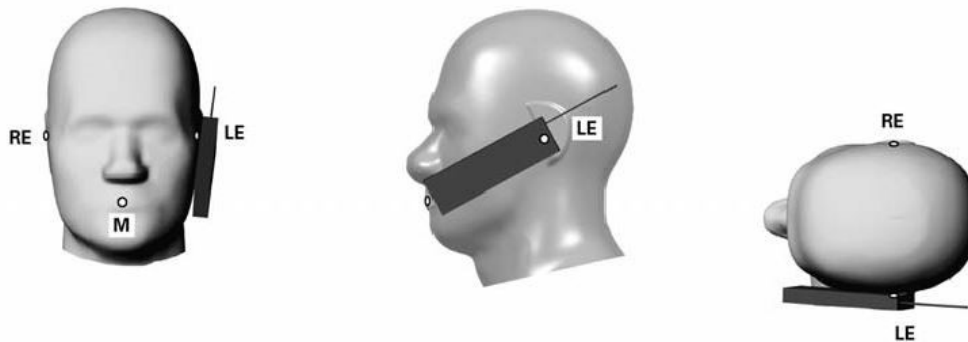


Fig 12.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

14.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 12.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

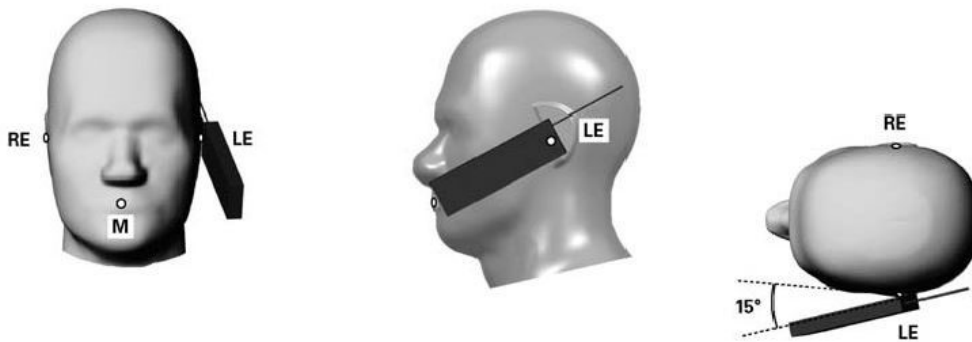


Fig 12.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

14.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 11.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

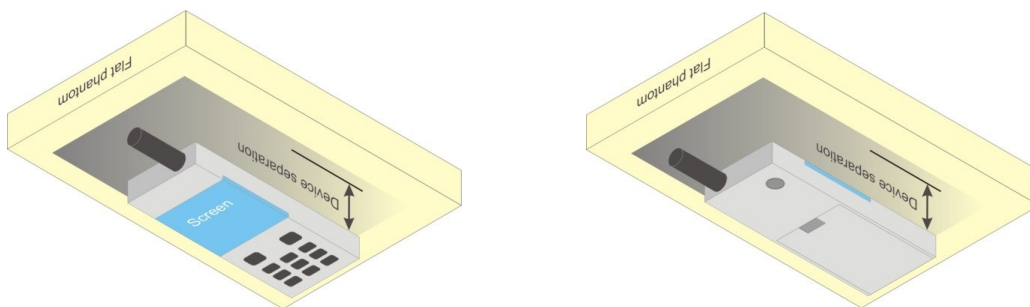


Fig 12.4 Body Worn Position

14.5 Product Specific 10g SAR Exposure

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, that can provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets and support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.6 The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

14.6 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9$ cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

15. Conducted RF Output Power (Unit: dBm)


The detailed conducted power table can refer to Appendix E.

<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM/64QAM/256QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM/256QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4 / B5 / B12 / B17 / B26 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

9. LTE B4 /B5 / B17 / B38 SAR test was covered by B66 / B26 / B12 / B41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
10. According to May 2017 TCB workshop, for 16QAM and 64QAM, 256QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 256QAM, 64QAM and 16QAM signal modulation are correct.

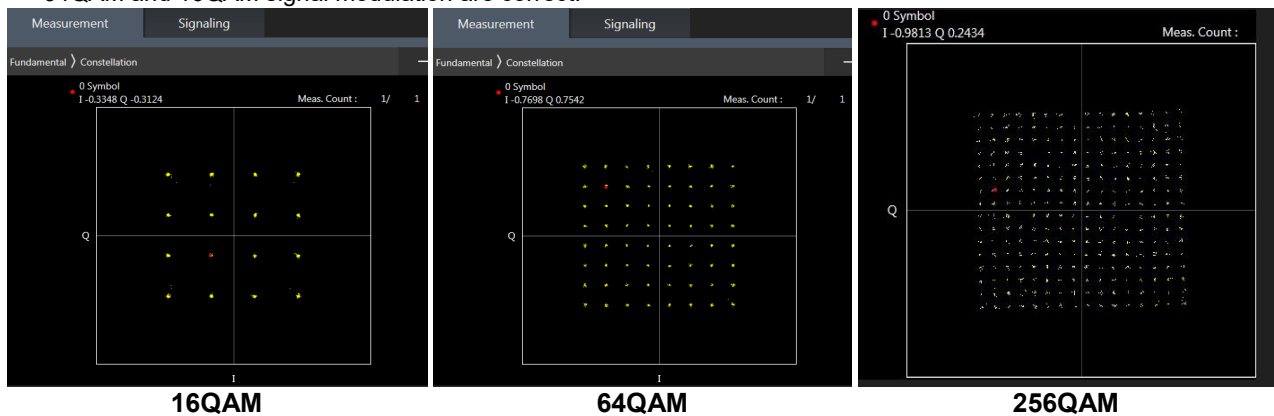

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- a. 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- b. "special subframe S" contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- c. Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

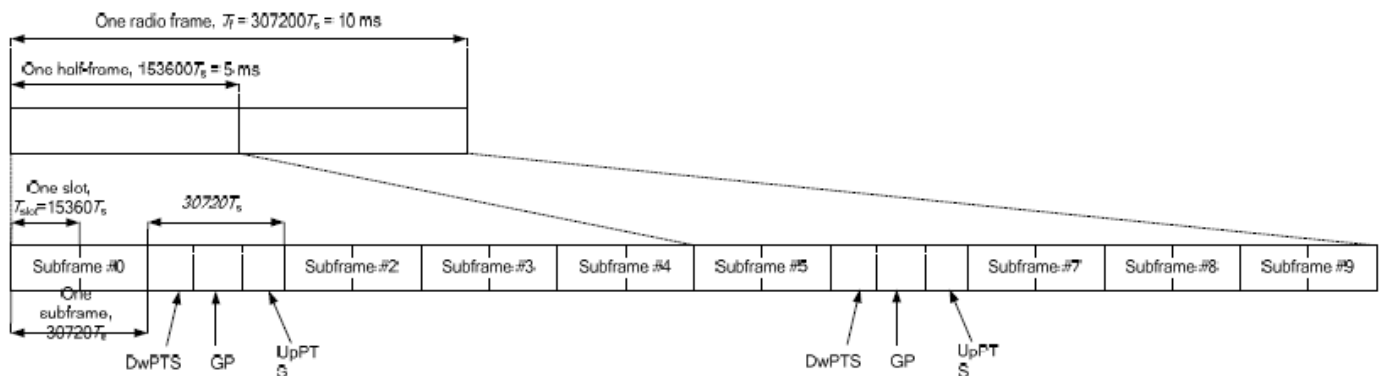


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	D	S	U	U	D	

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink				Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS		
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink	
0	6592 · Ts	2192 · Ts	2560 · Ts	7680 · Ts	2192 · Ts	2560 · Ts	
1	19760 · Ts			20480 · Ts			
2	21952 · Ts			23040 · Ts			
3	24144 · Ts			25600 · Ts			
4	26336 · Ts			7680 · Ts	4384 · Ts	5120 · Ts	
5	6592 · Ts	4384 · Ts	5120 · Ts	20480 · Ts			
6	19760 · Ts			23040 · Ts			
7	21952 · Ts			12800 · Ts			
8	24144 · Ts			-	-	-	
9	13168 · Ts			-	-	-	

Special subframe (30720·T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

For LTE TDD Power class 2

- i. Uplink-downlink configuration: 1. In a half-frame consisted of 5 subframes, uplink operation is in 2 uplink subframes and 1 special subframe.
- ii. special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- iii. for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(2+0.167)/5 = 43.3\%$
- iv. for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(2+0.143)/5 = 42.9\%$
- v. For TDD LTE SAR measurement, the duty cycle 1:2.33 (42.9 %) was used perform testing and considering the theoretical duty cycle of 43.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 42.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $43.3\%/42.9\% = 1.009$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.

For LTE TDD Power class 3

- i. Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- ii. special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- iii. for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.167)/5 = 63.3\%$
- iv. for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.143)/5 = 62.9\%$
- v. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.

The device can adjust uplink/downlink configuration automatically according to the transmitting power class level, as followings:

LTE TDD Band	Power Class level	support uplink/downlink configuration
LTE Band 41	> 23	1,2,3,4,5
	=23	0,1,2,3,4,5,6
	< 23	0,1,2,3,4,5,6



<LTE Carrier Aggregation>

General Note:

1. This device supports Carrier Aggregation on downlink for inter and intra band. For the device supports bands and bandwidths and configurations are provided as follow table was according to 3GPP.
2. In applying the existing power measurement procedures of KDB 941225 D05A for DL CA SAR test exclusion, only the subset with the largest number of combinations of frequency bands and CCs in each row need combination, and for this device that all the configurations were choose to power measurement.
3. The gray color table is covered by other combinations and no need to verify power.

2CC Downlink Carrier Aggregation			3CC Downlink Carrier Aggregation			4CC Downlink Carrier Aggregation		
Number	Combination	Covered by Measurement Superset	Number	Combination	Covered by Measurement Superset	Number	Combination	Covered by Measurement Superset
1	CA_26A-41A		1	CA_26A-41C		1	CA_41C-42C	
2	CA_2A-5A		2	CA_41A-42C		2	CA_42E	
3	CA_2A-7A		3	CA_41C-42A				
4	CA_38C		4	CA_42D				
5	CA_41A-42A							
6	CA_41C	3CC-1						
7	CA_42C	3CC-2						
8	CA_4A-4A							
9	CA_4A-5A							
10	CA_4A-7A							
11	CA_5A-38A							
12	CA_5A-41A							
13	CA_5A-7A							
14	CA_7A-26A							
15	CA_7A-42A							
16	CA_7B							
17	CA_7C							

LTE Carrier Aggregation Conducted Power (Downlink)

- i. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device supports downlink four carrier aggregation. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For inter-band CA, the SCC selected highest bandwidth and near the middle of its transmission band. For SCC DL RB size and offset will base on the PCC corresponding RB allocation.
- vi. For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band.
- vii. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1|BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

LTE 4x4 MIMO (Downlink)

This device supports downlink 4x4 MIMO operations for LTE Band 2/4/7/38/41/42 only. Uplink transmission is limited to a single output stream. Power measurements were performed with downlink 4x4 MIMO active for the configuration with highest measured maximum conducted power with 4x4 downlink MIMO inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band.

Per FCC Guidance, SAR for downlink 4x4 MIMO was not needed since the maximum average output power in 4x4 downlink MIMO mode was not > 0.25 dB higher than the maximum output power with downlink 4x4 MIMO inactive. When carrier aggregation is applicable, power measurements were performed with the downlink carrier aggregation and 4x4 DL MIMO active for the configuration with highest measured maximum conducted power with downlink carrier aggregation inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band.

4X4 MIMO	Band
	LTE Band 2/4/7/38/41/42



LTE Carrier Aggregation Conducted Power (Uplink)

LTE Uplink CA	2CC Uplink Carrier Aggregation	
Intra-band	Antenna Tx	ASDiv-1 Tx
CA_7C	Ant 2	Ant 1/10/0
CA_38C	Ant 2	Ant 1/10/0
CA_41C	Ant 2	Ant 1/10/0
CA_42C	Ant 7	-

<Intra-band>

General Note:

- i. The device supports intra-band uplink carrier aggregation for LTE B7/38/41/42 with a maximum of two uplink component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when not-contiguous RB allocation is implemented. The conducted power and MPR setting in this device are permanently implemented pre 3GPP requirement.
- ii. The device supports uplink carrier aggregation with a maximum of two uplink component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when not-contiguous RB allocation is implemented. The conducted power and MPR setting in this device are permanently implemented pre the 3GPP requirement.
- iii. According Nov. 2017 TCB workshop, the output power with uplink CA active was measured for the configuration with the highest reported SAR with single carrier for each exposure condition. The power was measured with wideband signal integration over both component carriers.
- iv. Additional SAR measurement for LTE UL CA whit other DL CA combinations active were not required since the maximum output power for this configuration was not > 0.25dB higher than the maximum output power for UL CA active.

<Inter-band uplink carrier aggregation consideration>

LTE Uplink CA	2CC Uplink Carrier Aggregation	
Inter-band	Main Antenna Tx	ASDiv-1 Tx
CA_4A-5A	Ant 2 + Ant 1	Ant 1+ Ant 0
CA_4A-7A	Ant 2 + Ant 1	-
CA_5A-7A	Ant 1 + Ant 2/10/0	ANT0+ANT1/10
CA_2A-7A	Ant 1 + Ant 2	-
CA_7A-26A	Ant 2 + Ant 1	Ant 1+ Ant 0 Ant 10+ Ant 0/1 Ant 0+ Ant 1

General Note:

1. The single carrier of inter band CA uplink power level is the same as Non-CA standalone LTE power level.
2. The product implements Qualcomm Smart Transmit feature which controls the instantaneous transmitting power for WWAN transmitter to ensure the product in compliance with FCC RF exposure limit over a defined time window, for SAR (transmit frequency ≤ 6GHz). To control and manage transmitting power in real time and to ensure at all times the time-averaged RF exposure is compliant to the regulation requirement.
3. For LTE inter-band CA mode, Qualcomm Smart Transmit algorithm in WWAN adds directly the time-averaged RF exposure between two LTE bands. Smart Transmit algorithm controls the total RF exposure base on LTE inter CA bands to not exceed FCC limit. In Part 1 Report, simultaneous transmission compliance was evaluated with other Radios (WLAN or BT) using standalone LTE SAR mode.

5G NR Output Power (Unit: dBm)

General Note:

1. 5G NR n5 / n41/n77/n78 is SA/NSA mode, 5G NR n66 is NSA mode only.
2. For 5G NR test procedure was following step similar FCC KDB 941225 D05:
 - a. For DFT-OFDM and CP-OFDM output power measurement reduction, according to 38.101 maximum power reduction for power class2 and 3, the CP-OFDM mode will not higher than DFT-OFDM mode, therefore, similar FCC KDB 941225 D05 procedure for other modulation output power for each RB allocation configuration is > not ½ dB higher than the same configuration in DFT-s QPSK and the reported SAR for the DFT-s QPSK configuration is ≤ 1.45 W/kg; CP-OFDM testing is not required.
 - b. For DFT-OFDM output power measurement reduction, according to 38.101 maximum power reduction for power class2 and 3, for 16QAM/64QAM/256QAM and smaller bandwidth output power will spot check largest channel bandwidth worst RB configuration to ensure the 16QAM/64QAM/256QAM and smaller bandwidth output power will not ½ dB higher than the same configuration in the largest supported bandwidth.
 - c. SAR testing start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel
 - d. 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure
 - e. QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested
 - f. PI/2 BPSK/16QAM/64QAM/256QAM output powers according to 3GPP MPR will not ½ dB higher than the same configuration in QPSK, also reported SAR for the QPSK configuration is less than 1.45 W/kg, PI/2 BPSK /16QAM/64QAM/256QAM SAR testing are not required.
 - g. Smaller bandwidth output power for each RB allocation configuration for this device will not ½ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg, smaller bandwidth SAR testing is not required for this device
3. NSA and SA mode should perform SAR separately. For the maximum power of NSA mode is the same as SA total power level, so SA SAR can represent NSA mode SAR.
4. Due to test setup limitations, SAR testing for NR was performed using Factory Test Mode software to establish the connection and perform SAR with 100% transmission.
5. 5G NR NSA mode, the power level is the same as 5G NR SA mode, so 5G NR NSA mode and SA mode power table only show one time.
6. 5G NR supports CP-OFDM and DFT-s-OFDM modulation, for DFT-s-OFDM power is higher than CP-OFDM, so only show DFT-s-OFDM power table and chose DFT-s-OFDM to perform SAR testing.
7. For DFT-s-OFDM and CP-OFDM output power measurement reduction, according to 38.101 maximum power reduction for the CP-OFDM mode will not higher than DFT-s-OFDM mode, therefore, CP-OFDM measurement is unnecessary.

<3GPP 38.101 MPR for EN-DC>

Table 6.2.2-1 Maximum power reduction (MPR) for power class 3

Modulation		MPR (dB)		
		Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM	Pi/2 BPSK	$\leq 3.5^1$	$\leq 1.2^1$	$\leq 0.2^1$
		$\leq 0.5^2$	$\leq 0.5^2$	0 ²
	QPSK		≤ 1	0
	16 QAM		≤ 2	≤ 1
	64 QAM		≤ 2.5	
CP-OFDM	256 QAM		≤ 4.5	
	QPSK	≤ 3		≤ 1.5
	16 QAM	≤ 3		≤ 2
	64 QAM		≤ 3.5	
	256 QAM		≤ 6.5	

NOTE 1: Applicable for UE operating in TDD mode with Pi/2 BPSK modulation and UE indicates support for UE capability *powerBoosting-pi2BPSK* and if the IE *powerBoostPi2BPSK* is set to 1 and 40 % or less slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79. The reference power of 0 dB MPR is 26 dBm.

NOTE 2: Applicable for UE operating in FDD mode, or in TDD mode in bands other than n40, n41, n77, n78 and n79 with Pi/2 BPSK modulation and if the IE *powerBoostPi2BPSK* is set to 0 and if more than 40 % of slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79.

Table 6.2.2-2 Maximum power reduction (MPR) for power class 2

Modulation		MPR (dB)		
		Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM	Pi/2 BPSK	≤ 3.5	≤ 0.5	0
	QPSK	≤ 3.5	≤ 1	0
	16 QAM	≤ 3.5	≤ 2	≤ 1
	64 QAM	≤ 3.5		≤ 2.5
	256 QAM		≤ 4.5	
CP-OFDM	QPSK	≤ 3.5	≤ 3	≤ 1.5
	16 QAM	≤ 3.5	≤ 3	≤ 2
	64 QAM		≤ 3.5	
	256 QAM		≤ 6.5	

<EN-DC combination>

ENDC	Main Antenna Tx		ASDdiv-1 Tx	
	LTE TX	NR TX	LTE TX	NR TX
DC_66A_n5A	Ant 2	Ant 1	ANT1	ANT0
DC_66A_n41A	Ant 1	Ant 2	disable	disable
DC_41A_n77A	Ant 2	Ant 7	disable	disable
DC_41A_n78A	Ant 2	Ant 7	disable	disable



16. Antenna Location

The detailed antenna location information can refer to SAR Test Setup Photos.

17. Spot Check SAR Test Results

Spot Check General Note:

1. According to section 3.3, spot check conducted power test against the variant project based on the worst-case SAR condition from the original project was performed in this filing to demonstrate the test data from original project remains representative for the variant project. Detail Conducted power measurement referred to appendix E.
2. SAR spot check verification on the worst cases from the original model was performed to demonstrate the test data from original model remains representative for the variant model.
3. Per KDB 484596 D01 v02r02, the variant filings must demonstrate that the referenced test data remain valid for the variant device by including spot-check measurements that meet the following criteria:
 - a. Spot-check measurements shall be made in correspondence to the worst-case scenario reported in the reference device filing, i.e., for those conditions that are the closest to non-compliance
 - b. Spot-check measurements, while being always compliant with the applicable rule part(s) for the test under consideration, may show a deviation d_{dB} from the reference data no larger than 3 dB:
$$d_{dB} = |V_{dB} - R_{dB}| \leq 3 \text{ dB} \quad (1)$$
where between V_{dB} , the variant spot-check level in dB, and R_{dB} is the corresponding measurement level in dB for the reference model.
4. The Spot check results showed that deviation of the SAR results did not exceed 3 dB, therefore referring to the guidance in the KDB inquiry, SAR data reuse is justified.
5. 1st as parent model, 2nd as variant model.

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For SAR testing of Bluetooth signal with 83.3% theoretical duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle) *83.3%".
 - d. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - e. For BT/WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
 - f. For TDD LTE SAR measurement of power class 3, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix 63.3%/62.9% = 1.006 is applied to scale-up the measured SAR result. The reported TDD LTE SAR (W/kg) = Measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is ≥ 0.8 W/kg. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. The device implements the power management and proximity sensor /receiver detection/hotspot mode for SAR compliance at different exposure conditions (head, body-worn, hotspot, extremity) and the Qualcomm smart transmit will manage to ensure the power level not exceeding the associated power table. Details about the power management decision and sensor detection are provided in the operational description. And the device will invoke corresponding work scenarios power level base on frequency bands/antennas, which can refer to power table at appendix E.
5. For WLAN/BT when transmit simultaneous with WWAN/BT, power reduction will be activated to head exposure condition. For WLAN/BT when transmit simultaneous with WWAN and Proximity sensors trigger, power reduction will be activated to body-worn and extremity exposure conditions.
6. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal

dimension > 16.0 cm, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.

- a. For this device SAR for WWAN/WLAN transmitter scaled to maximum output power mode for product specific 10g SAR is higher than 1.2W/kg of GSM850/1900, WCDMA Band II/IV/V, LTE Band 2/4/7/66/38/41/42, 5G NR n66 / n41/n78/n77, WLAN 2.4/5.2/5.8GHz, therefore product specific 10g SAR is necessary.
 - b. WLAN 5.3/5.5GHz tested the product specific 10g SAR since it has no hotspot mode.
 - c. When 10-g product specific 10g SAR is considered, SAR thresholds is specified in the procedures for SAR test reduction and exclusion should be multiplied by 2.5.
7. Although the headset SAR is greater than 0.8 W/kg, the headset SAR verified the worst of the non-headset SAR and less than non-headset SAR, so there is no need to be tested other channels.
 8. According to Nov. 2017 TCB workshop, when the reported 1gSAR for UL CA configuration is <1.2 W/kg, UL CA 1gSAR is not required for all required test channels (PCC based).
 9. For determination of the scaling factor for reported SAR of MIMO mode, if the hot spots are separated the scaling factors are individually determined from each transmit chain. Further simplification chose the worse SAR value and the worst scaling factor from each transmit chain perform reported SAR calculation conservatively. If the hot spots are not spatially separated, the scaling factor is determined from the worst number of each transmit chain.
 10. 5G NR n66 at ant1/2 support different PAs for some antennas, and NR bands support Other PA only under ENDC. Some NR bands support different PAs for some antennas, whether it is the maximum power of Main PA is higher than and very close to the other PA, for RF exposure, after verification all PAs in a same position, so the worst-case PA was chosen to perform full SAR testing to ensure the RF exposure is compliance and other PAs verified the worst case.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM/64QAM/256QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM/256QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4 / B5 / B12 / B17 / B26 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE B4 /B5 / B17 / B38 SAR test was covered by B66 / B26 / B12 / B41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band

DSI status description:

The device has the following DSI state which used at different exposure condition.

This WWAN bands enabled with Qualcomm Smart Transmit feature which located at chapter 5. The default power is Pmax power, When Plimit power higher than Pmax power, the output power will be limited at Pmax, and so the SAR will use Pmax power to do the testing.

Exposure Condition	DSI	Trigger Conditions
Head SAR	DSI 2	Receiver on
Body worn SAR	DSI 3	Sensor On
Hotspot SAR	DSI 7	Hotspot On
Extremity (Handheld) SAR	DSI 6	Sensor On
Sensor Off SAR	DSI 4	Sensor Off



17.1 Head SAR

Plot No.	No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Deviation d _{dB} (dB)
750MHz																						
	1st	LTE Band 12	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	23095	707.5	22.50	24.00	1.413	-	-	-0.09	0.137	0.194	0.28
	2nd	LTE Band 12	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	23095	707.5	22.41	24.00	1.442	-	-	0.02	0.126	0.182	
	1st	LTE Band 12	10M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 2	23095	707.5	20.99	22.00	1.262	-	-	-0.06	0.701	0.885	1.72
01	2nd	LTE Band 12	10M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 2	23095	707.5	20.93	22.00	1.279	-	-	-0.02	0.465	0.595	
835MHz																						
	1st	GSM850	-	-	-	-	GPRS (3 Tx slots)	Left Cheek	0mm	Ant 0	DSI 2	189	836.4	28.74	30.00	1.337	-	-	0.02	0.125	0.167	0.27
	2nd	GSM850	-	-	-	-	GPRS (3 Tx slots)	Left Cheek	0mm	Ant 0	DSI 2	189	836.4	28.68	30.00	1.355	-	-	0.02	0.116	0.157	
	1st	GSM850	-	-	-	-	GPRS (4 Tx slots)	Right Cheek	0mm	Ant 1	DSI 2	189	836.4	23.51	24.50	1.256	-	-	0.06	0.671	0.843	0.14
02	2nd	GSM850	-	-	-	-	GPRS (4 Tx slots)	Right Cheek	0mm	Ant 1	DSI 2	189	836.4	23.41	24.50	1.285	-	-	0.08	0.636	0.817	
	1st	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 0	DSI 2	4182	836.4	22.32	24.00	1.472	-	-	-0.01	0.117	0.172	0.54
	2nd	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 0	DSI 2	4182	836.4	22.18	24.00	1.521	-	-	0.03	0.100	0.152	
	1st	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 1	DSI 2	4182	836.4	20.01	21.00	1.256	-	-	0.01	0.700	0.879	1.23
03	2nd	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 1	DSI 2	4182	836.4	19.94	21.00	1.276	-	-	0.03	0.519	0.662	
	1st	LTE Band 26	15M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	26865	831.5	22.82	24.00	1.312	-	-	0.09	0.150	0.197	0.49
	2nd	LTE Band 26	15M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	26865	831.5	22.75	24.00	1.334	-	-	0.02	0.132	0.176	
	1st	LTE Band 26	15M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 2	26865	831.5	19.67	21.10	1.390	-	-	-0.02	0.633	0.880	1.62
04	2nd	LTE Band 26	15M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 2	26865	831.5	19.56	21.10	1.426	-	-	0.01	0.425	0.606	
	1st	FR1 n26(n5)	20M	QPSK	1	1	DFT-SCS-15KHz	Left Cheek	0mm	Ant 0	DSI 2	166300	831.5	22.86	24.00	1.300	-	-	0.05	0.125	0.163	0.66
	2nd	FR1 n5	20M	QPSK	1	1	DFT-SCS-15KHz	Left Cheek	0mm	Ant 0	DSI 2	167300	836.5	22.75	24.00	1.334	-	-	0.06	0.105	0.140	
	1st	FR1 n26(n5)	20M	QPSK	1	1	DFT-SCS-15KHz	Right Cheek	0mm	Ant 1	DSI 2	166300	831.5	21.47	23.00	1.422	-	-	-0.01	0.625	0.889	0.69
05	2nd	FR1 n5	20M	QPSK	1	1	DFT-SCS-15KHz	Right Cheek	0mm	Ant 1	DSI 2	167300	836.5	21.43	23.00	1.435	-	-	0.06	0.528	0.758	
1750MHz																						
	1st	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 2	DSI 2	1413	1732.6	22.07	23.00	1.239	-	-	0.04	0.102	0.126	0.18
	2nd	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 2	DSI 2	1413	1732.6	21.96	23.00	1.271	-	-	0.02	0.095	0.121	
	1st	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 1	DSI 2	1513	1752.6	14.00	15.30	1.349	-	-	-0.01	0.652	0.880	0.07
06	2nd	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 1	DSI 2	1513	1752.6	13.91	15.30	1.377	-	-	0.02	0.629	0.866	
	1st	LTE Band 66	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 2	DSI 2	132322	1745	22.64	24.00	1.368	-	-	-0.02	0.084	0.115	1.02
	2nd	LTE Band 66	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 2	DSI 2	132322	1745	22.59	24.00	1.384	-	-	0.02	0.066	0.091	
	1st	LTE Band 66	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI 2	132572	1770	15.02	16.30	1.343	-	-	0.03	0.656	0.881	0.23
07	2nd	LTE Band 66	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI 2	132572	1770	14.86	16.30	1.393	-	-	-0.01	0.599	0.835	
	1st	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Right Cheek	0mm	Ant 2	DSI 2	349000	1745	22.58	24.00	1.387	-	-	0.01	0.100	0.139	0.03
	2nd	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Right Cheek	0mm	Ant 2	DSI 2	349000	1745	22.50	24.00	1.413	-	-	-0.05	0.098	0.138	
	1st	FR1 n66 Other PA	40M	QPSK	1	1	DFT-SCS-15KHz	Right Cheek	0mm	Ant 2	DSI 2	349000	1745	21.49	23.00	1.416	-	-	0.06	0.085	0.120	0.30
	2nd	FR1 n66 Other PA	40M	QPSK	1	1	DFT-SCS-15KHz	Right Cheek	0mm	Ant 2	DSI 2	349000	1745	21.41	23.00	1.442	-	-	0.02	0.078	0.112	
	1st	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Right Tilted	0mm	Ant 1	DSI 2	349000	1745	16.15	16.90	1.189	-	-	0.05	0.736	0.875	0.20
08	2nd	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Right Tilted	0mm	Ant 1	DSI 2	349000	1745	16.11	16.90	1.199	-	-	-0.03	0.697	0.836	
	1st	FR1 n66 Other PA	40M	QPSK	1	1	DFT-SCS-15KHz	Right Tilted	0mm	Ant 1	DSI 2	349000	1745	16.09	16.90	1.205	-	-	0.06	0.718	0.865	0.27
	2nd	FR1 n66 Other PA	40M	QPSK	1	1	DFT-SCS-15KHz	Right Tilted	0mm	Ant 1	DSI 2	349000	1745	16.01	16.90	1.227	-	-	0.02	0.662	0.813	
1900MHz																						
	1st	GSM1900	-	-	-	-	GPRS (3 Tx slots)	Right Cheek	0mm	Ant 2	DSI 2	661	1880	24.78	26.00	1.324	-	-	0.01	0.067	0.089	0.69
	2nd	GSM1900	-	-	-	-	GPRS (3 Tx slots)	Right Cheek	0mm	Ant 2	DSI 2	661	1880	24.65	26.00	1.365	-	-	0.02	0.056	0.076	
	1st	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Right Tilted	0mm	Ant 1	DSI 2	810	1909.8	17.62	18.60	1.253	-	-	0.06	0.672	0.842	0.22
09	2nd	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Right Tilted	0mm	Ant 1	DSI 2	810	1909.8	17.48	18.60	1.294	-	-	0.01	0.619	0.801	
	1st	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 2	DSI 2	9400	1880	22.15	23.00	1.216	-	-	0.01	0.135	0.164	0.42
	2nd	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 2	DSI 2	9400	1880	22.09	23.00	1.233	-	-	0.06	0.121	0.149	
	1st	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 1	DSI 2	9538	1907.6	13.75	14.70	1.245	-	-	0.04	0.717	0.892	0.16



FCC SAR Test Report

Report No. : FA3D1818-01

10	2nd	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 1	DSI 2	9538	1907.6	13.68	14.70	1.265	-	-	0.07	0.679	0.859	
	2nd	LTE Band 2	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 2	DSI 2	18900	1880	21.07	22.50	1.390	-	-	-0.04	0.109	0.152	
	2nd	LTE Band 2	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 2	DSI 2	18900	1880	20.11	21.50	1.377	-	-	0.17	0.083	0.114	
	2nd	LTE Band 2	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 2	DSI 2	18900	1880	21.07	22.50	1.390	-	-	0.06	0.076	0.106	
	2nd	LTE Band 2	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 2	DSI 2	18900	1880	20.11	21.50	1.377	-	-	0.01	0.052	0.072	
	2nd	LTE Band 2	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 2	DSI 2	18900	1880	21.07	22.50	1.390	-	-	-0.04	0.106	0.147	
	2nd	LTE Band 2	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 2	DSI 2	18900	1880	20.11	21.50	1.377	-	-	-0.15	0.072	0.099	
	2nd	LTE Band 2	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 2	DSI 2	18900	1880	21.07	22.50	1.390	-	-	0.11	0.061	0.085	
	2nd	LTE Band 2	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 2	DSI 2	18900	1880	20.11	21.50	1.377	-	-	-0.02	0.032	0.044	
	2nd	LTE Band 2	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 2	18900	1880	14.86	16.30	1.393	-	-	0.08	0.551	0.768	
	2nd	LTE Band 2	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 1	DSI 2	18900	1880	14.84	16.30	1.400	-	-	0.14	0.496	0.694	
	2nd	LTE Band 2	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI 2	18900	1880	14.86	16.30	1.393	-	-	0.14	0.581	0.809	
	2nd	LTE Band 2	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI 2	18700	1860	14.79	16.30	1.416	-	-	-0.17	0.597	0.845	
11	2nd	LTE Band 2	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI 2	19100	1900	14.82	16.30	1.406	-	-	0.01	0.612	0.861	
	2nd	LTE Band 2	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 1	DSI 2	18900	1880	14.84	16.30	1.400	-	-	0.17	0.601	0.841	
	2nd	LTE Band 2	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 1	DSI 2	18700	1860	14.74	16.30	1.432	-	-	-0.05	0.584	0.836	
	2nd	LTE Band 2	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 1	DSI 2	19100	1900	14.80	16.30	1.413	-	-	0.01	0.587	0.829	
	2nd	LTE Band 2	20M	QPSK	100	0	-	Right Tilted	0mm	Ant 1	DSI 2	18900	1880	14.76	16.30	1.426	-	-	0.1	0.579	0.825	
	2nd	LTE Band 2	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 2	18900	1880	14.86	16.30	1.393	-	-	-0.17	0.288	0.401	
	2nd	LTE Band 2	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 1	DSI 2	18900	1880	14.84	16.30	1.400	-	-	0.04	0.261	0.365	
	2nd	LTE Band 2	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	DSI 2	18900	1880	14.86	16.30	1.393	-	-	-0.01	0.426	0.593	
	2nd	LTE Band 2	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 1	DSI 2	18900	1880	14.84	16.30	1.400	-	-	0.06	0.399	0.558	
2600MHz																						
	1st	LTE Band 7	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 2	DSI 2	21100	2535	22.80	24.00	1.318	-	-	-0.04	0.133	0.175	0.64
	2nd	LTE Band 7	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 2	DSI 2	21100	2535	22.71	24.00	1.346	-	-	0.02	0.112	0.151	
	1st	LTE Band 7	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI 2	21350	2560	12.80	13.70	1.230	-	-	0.01	0.716	0.881	0.13
	2nd	LTE Band 7	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI 2	21350	2560	12.68	13.70	1.265	-	-	-0.01	0.676	0.855	
	1st	LTE Band 7	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 10	DSI 2	21100	2535	21.54	22.90	1.368	-	-	0.07	0.639	0.874	0.03
12	2nd	LTE Band 7	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 10	DSI 2	21100	2535	21.48	22.90	1.387	-	-	0.07	0.626	0.868	
	1st	LTE Band 7	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	21100	2535	20.94	22.50	1.432	-	-	0.04	0.135	0.193	0.53
	2nd	LTE Band 7	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	21100	2535	20.86	22.50	1.459	-	-	0.01	0.117	0.171	
	1st	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 2	DSI 2	40620	2593	22.41	23.50	1.285	62.9	1.006	0.05	0.090	0.116	0.69
	2nd	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 2	DSI 2	40620	2593	22.32	23.50	1.312	62.9	1.006	0.06	0.075	0.099	
	1st	LTE Band 41 HPUE	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 2	DSI 2	40620	2593	25.45	26.50	1.274	42.9	1.009	0.04	0.118	0.152	0.88
	2nd	LTE Band 41 HPUE	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 2	DSI 2	40620	2593	25.38	26.50	1.294	42.9	1.009	0.03	0.095	0.124	
	1st	LTE Band 41	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI 2	41055	2636.5	14.76	15.80	1.271	62.9	1.006	-0.06	0.702	0.897	0.31
	2nd	LTE Band 41	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI 2	41055	2636.5	14.71	15.80	1.285	62.9	1.006	0.06	0.646	0.835	
	1st	LTE Band 41 HPUE	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI 2	41055	2636.5	16.55	17.40	1.216	42.9	1.009	0.02	0.670	0.822	0.03
	2nd	LTE Band 41 HPUE	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI 2	41055	2636.5	16.49	17.40	1.233	42.9	1.009	0.01	0.657	0.817	
	1st	LTE Band 41	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 10	DSI 2	41490	2680	22.15	23.30	1.303	62.9	1.006	-0.06	0.680	0.891	0.15
13	2nd	LTE Band 41	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 10	DSI 2	41490	2680	22.09	23.30	1.321	62.9	1.006	-0.02	0.647	0.860	
	1st	LTE Band 41 HPUE	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 10	DSI 2	41490	2680	23.70	24.90	1.318	42.9	1.009	-0.12	0.667	0.887	0.81
	2nd	LTE Band 41 HPUE	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 10	DSI 2	41490	2680	23.57	24.90	1.358	42.9	1.009	0.03	0.537	0.736	
	1st	LTE Band 41	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	40620	2593	21.52	23.00	1.406	62.9	1.006	-0.05	0.100	0.141	1.12
	2nd	LTE Band 41	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	40620	2593	21.45	23.00	1.429	62.9	1.006	0.08	0.076	0.109	
	1st	LTE Band 41 HPUE	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	40620	2593	24.55	26.00	1.396	42.9	1.009	0.08	0.131	0.185	1.27
	2nd	LTE Band 41 HPUE	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	40620	2593	24.43	26.00	1.435	42.9	1.009	0.02	0.095	0.138	
	1st	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Right Cheek	0mm	Ant 2	DSI 2	518598	2592.99	22.56	24.00	1.393	-	-	0.04	0.128	0.178	0.95
	2nd	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Right Cheek	0mm	Ant 2	DSI 2	518598	2592.99	22.49	24.00	1.416	-	-	0.01	0.101	0.143	
	1st	FR1 n41	100M	QPSK	1	1	DFT-SCS-30KHz	Right Tilted	0mm	Ant 1	DSI 2	518598	2592.99	13.90	14.80	1.230	-	-	-0.03	0.714	0.878	0.05
14	2nd	FR1 n41	100M	QPSK	1	1	DFT-SCS-30KHz	Right Tilted	0mm	Ant 1	DSI 2	518598	2592.99	13.79	14.80	1.262	-	-	-0.04	0.687	0.867	
	1st	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Left Cheek	0mm	Ant 10	DSI 2	518598	2592.99	22.85	24.00	1.303	-	-	-0.03	0.378	0.493	0.37
	2nd	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Left Cheek	0mm	Ant 10	DSI 2	518598	2592.99	22.79	24.00	1.321	-	-	-0.01	0.343	0.453	



FCC SAR Test Report

Report No. : FA3D1818-01

Plot No.	1st	2nd	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Left Cheek	0mm	Ant 0	DSI 2	518598	2592.99	20.85	22.00	1.303	-	-	0.04	0.227	0.296	0.01
			FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Left Cheek	0mm	Ant 0	DSI 2	518598	2592.99	20.71	22.00	1.346	-	-	0.08	0.219	0.295	
3500MHz																							
	1st		LTE Band 42 Part 27Q	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 7	DSI 2	42990	3540	18.23	19.20	1.250	62.9	1.006	-0.08	0.706	0.888	0.27
15	2nd		LTE Band 42 Part 27Q	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 7	DSI 2	42990	3540	18.15	19.20	1.274	62.9	1.006	-0.08	0.651	0.834	
	1st		FR1 n77 Part 27O	100M	QPSK	135	69	DFT-SCS-30KHz	Right Cheek	0mm	Ant 7	DSI 2	656000	3840	16.75	17.70	1.245	-	-	0.07	0.708	0.881	0.02
16	2nd		FR1 n77 Part 27O	100M	QPSK	135	69	DFT-SCS-30KHz	Right Cheek	0mm	Ant 7	DSI 2	656000	3840	16.71	17.70	1.256	-	-	-0.01	0.698	0.877	
	1st		FR1 n77 Part 27O	100M	QPSK	135	69	DFT-SCS-30KHz	Left Tilted	0mm	Ant 4	DSI 2	656000	3840	18.02	19.00	1.426	-	-	0.01	0.674	0.845	0.02
	2nd		FR1 n77 Part 27O	100M	QPSK	135	69	DFT-SCS-30KHz	Left Tilted	0mm	Ant 4	DSI 2	656000	3840	18.02	19.00	1.253	-	-	0.01	0.672	0.842	
	1st		FR1 n77 Part 27O	100M	QPSK	1	1	DFT-SCS-30KHz	Right Cheek	0mm	Ant 8	DSI 2	656000	3840	22.29	24.00	1.483	-	-	0.03	0.178	0.264	0.34
	2nd		FR1 n77 Part 27O	100M	QPSK	1	1	DFT-SCS-30KHz	Right Cheek	0mm	Ant 8	DSI 2	656000	3840	22.24	24.00	1.500	-	-	-0.09	0.163	0.244	
	1st		FR1 n77 Part 27O	100M	QPSK	135	69	DFT-SCS-30KHz	Left Cheek	0mm	Ant 5	DSI 2	656000	3840	14.80	15.60	1.202	-	-	-0.04	0.710	0.854	0.09
	2nd		FR1 n77 Part 27O	100M	QPSK	135	69	DFT-SCS-30KHz	Left Cheek	0mm	Ant 5	DSI 2	656000	3840	14.70	15.60	1.230	-	-	-0.03	0.680	0.837	

Plot No.	No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Deviation d _{dB} (dB)	
WLAN/BT																			
	1st	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 6+3(6)	Standalone	6	2437	14.12	16.00	1.542	100	1.000	0.14	0.836	1.289	0.39	
17	2nd	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 6+3(6)	Standalone	6	2437	14.04	16.00	1.570	100	1.000	-0.1	0.751	1.179		
	1st	Bluetooth	1Mbps	Left Cheek	0mm	Ant 6	Standalone	78	2480	14.63	15.00	1.089	76.94	1.083	0.11	0.136	0.160	0.19	
	2nd	Bluetooth	1Mbps	Left Cheek	0mm	Ant 6	Standalone	78	2480	14.58	15.00	1.102	76.94	1.083	-0.02	0.128	0.153		
	1st	Bluetooth	1Mbps	Left Cheek	0mm	Ant 3	Standalone	0	2402	14.75	15.00	1.059	76.61	1.087	0.03	0.423	0.487	0.13	
18	2nd	Bluetooth	1Mbps	Left Cheek	0mm	Ant 3	Standalone	0	2402	14.68	15.00	1.076	76.61	1.087	-0.02	0.404	0.473		
	1st	WLAN5.3GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 5+4(4)	Standalone	58	5290	13.41	15.00	1.442	100	1.000	0.11	0.754	1.087	0.18	
19	2nd	WLAN5.3GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 5+4(4)	Standalone	58	5290	13.38	15.00	1.452	100	1.000	0.02	0.718	1.043		
	1st	WLAN5.5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 5+4(4)	Standalone	106	5530	12.04	13.50	1.400	100	1.000	0.12	0.790	1.106	0.14	
20	2nd	WLAN5.5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 5+4(4)	Standalone	106	5530	11.92	13.50	1.439	100	1.000	0.03	0.745	1.072		
	1st	WLAN5.8GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 5+4(4)	Standalone	155	5775	11.58	13.00	1.387	100	1.000	0.03	0.795	1.102	0.03	
21	2nd	WLAN5.8GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 5+4(4)	Standalone	155	5775	11.52	13.00	1.406	100	1.000	0.06	0.778	1.094		

Plot No.	No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured APD (W/m ²)	Deviation d _{dB} (dB)
	1st	WLAN6GHz	802.11ax-HE160 MCS0	Left Cheek	0mm	Ant 5+4(4)	Standalone	207	6985	10.17	12.00	1.524	100	1.000	-0.08	0.255	0.389	1.76	1.59
22	2nd	WLAN6GHz	802.11ax-HE160 MCS0	Left Cheek	0mm	Ant 5+4(4)	Standalone	207	6985	10.06	12.00	1.563	100	1.000	0.07	0.173	0.270	1.11	



17.2 Hotspot SAR

Plot No.	No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Deviation d _{dB} (dB)
750MHz																						
	1st	LTE Band 12	10M	QPSK	1	0	-	Back	5mm	Ant 0	DSI 7	23095	707.5	22.50	24.00	1.413	-	-	-0.07	0.604	0.853	0.08
23	2nd	LTE Band 12	10M	QPSK	1	0	-	Back	5mm	Ant 0	DSI 7	23095	707.5	22.41	24.00	1.442	-	-	-0.04	0.581	0.838	
	1st	LTE Band 12	10M	QPSK	1	0	-	Back	5mm	Ant 1	DSI 7	23095	707.5	21.90	23.00	1.288	-	-	-0.02	0.486	0.626	0.11
	2nd	LTE Band 12	10M	QPSK	1	0	-	Back	5mm	Ant 1	DSI 7	23095	707.5	21.81	23.00	1.315	-	-	-0.02	0.464	0.610	
835MHz																						
	1st	GSM850	-	-	-	-	GPRS (4 Tx slots)	Back	5mm	Ant 0	DSI 7	251	848.8	26.87	27.90	1.268	-	-	-0.01	0.767	0.972	0.09
24	2nd	GSM850	-	-	-	-	GPRS (4 Tx slots)	Back	5mm	Ant 0	DSI 7	251	848.8	26.83	27.90	1.279	-	-	0.02	0.745	0.953	
	1st	GSM850	-	-	-	-	GPRS (4 Tx slots)	Back	5mm	Ant 1	DSI 7	189	836.4	24.85	25.80	1.245	-	-	0.04	0.494	0.615	0.31
	2nd	GSM850	-	-	-	-	GPRS (4 Tx slots)	Back	5mm	Ant 1	DSI 7	189	836.4	24.76	25.80	1.271	-	-	0.01	0.450	0.572	
	1st	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	DSI 7	4233	846.6	22.18	24.00	1.521	-	-	0.02	0.833	1.267	0.35
25	2nd	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	DSI 7	4233	846.6	22.09	24.00	1.552	-	-	-0.06	0.753	1.169	
	1st	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 1	DSI 7	4182	836.4	20.10	21.30	1.318	-	-	-0.14	0.470	0.620	0.36
	2nd	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 1	DSI 7	4182	836.4	20.05	21.30	1.334	-	-	0.07	0.428	0.571	
	1st	LTE Band 26	15M	QPSK	1	0	-	Back	5mm	Ant 0	DSI 7	26865	831.5	22.82	24.00	1.312	-	-	-0.03	0.545	0.715	0.26
26	2nd	LTE Band 26	15M	QPSK	1	0	-	Back	5mm	Ant 0	DSI 7	26865	831.5	22.75	24.00	1.334	-	-	0.02	0.505	0.673	
	1st	LTE Band 26	15M	QPSK	1	0	-	Back	5mm	Ant 1	DSI 7	26865	831.5	21.73	22.90	1.309	-	-	0.03	0.470	0.615	0.20
	2nd	LTE Band 26	15M	QPSK	1	0	-	Back	5mm	Ant 1	DSI 7	26865	831.5	21.67	22.90	1.327	-	-	0.03	0.442	0.587	
	1st	FR1 n26(n5)	20M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 0	DSI 7	166300	831.5	22.86	24.00	1.300	-	-	0.02	0.569	0.740	0.35
27	2nd	FR1 n5	20M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 0	DSI 7	167300	836.5	22.75	24.00	1.334	-	-	0.05	0.512	0.683	
	1st	FR1 n26(n5)	20M	QPSK	50	28	DFT-SCS-15KHz	Back	5mm	Ant 1	DSI 7	166300	831.5	21.98	23.00	1.265	-	-	-0.03	0.487	0.616	0.46
	2nd	FR1 n5	20M	QPSK	50	28	DFT-SCS-15KHz	Back	5mm	Ant 1	DSI 7	167300	836.5	21.81	23.00	1.315	-	-	0.01	0.421	0.554	
1750MHz																						
	1st	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Bottom Side	5mm	Ant 2	DSI 7	1312	1712.4	18.14	19.20	1.276	-	-	-0.02	1.010	1.289	0.18
28	2nd	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Bottom Side	5mm	Ant 2	DSI 7	1312	1712.4	18.10	19.20	1.288	-	-	-0.01	0.960	1.237	
	1st	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Front	5mm	Ant 2	DSI 7	1312	1712.4	18.14	19.20	1.276	-	-	0.01	0.803	1.025	0.04
	2nd	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Front	5mm	Ant 2	DSI 7	1312	1712.4	18.10	19.20	1.288	-	-	0.06	0.788	1.015	
	1st	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 1	DSI 7	1413	1732.6	13.18	14.30	1.294	-	-	0.02	0.479	0.620	0.11
	2nd	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 1	DSI 7	1413	1732.6	13.13	14.30	1.309	-	-	-0.08	0.461	0.604	
	1st	LTE Band 66	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 2	DSI 7	132072	1720	18.78	19.90	1.294	-	-	0.05	0.981	1.270	0.04
29	2nd	LTE Band 66	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 2	DSI 7	132072	1720	18.73	19.90	1.309	-	-	0.01	0.960	1.257	
	1st	LTE Band 66	20M	QPSK	1	0	-	Front	5mm	Ant 2	DSI 7	132072	1720	18.78	19.90	1.294	-	-	0.14	0.761	0.985	0.12
	2nd	LTE Band 66	20M	QPSK	1	0	-	Front	5mm	Ant 2	DSI 7	132072	1720	18.73	19.90	1.309	-	-	0.06	0.732	0.958	
	1st	LTE Band 66	20M	QPSK	1	0	-	Back	5mm	Ant 1	DSI 7	132322	1745	12.30	13.90	1.445	-	-	0.03	0.424	0.613	0.09
	2nd	LTE Band 66	20M	QPSK	1	0	-	Back	5mm	Ant 1	DSI 7	132322	1745	12.26	13.90	1.459	-	-	-0.08	0.412	0.601	
	1st	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Bottom Side	5mm	Ant 2	DSI 7	349000	1745	18.99	20.20	1.321	-	-	0.08	0.973	1.286	0.34
30	2nd	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Bottom Side	5mm	Ant 2	DSI 7	349000	1745	18.90	20.20	1.349	-	-	0.04	0.882	1.190	
	1st	FR1 n66 Other PA	40M	QPSK	108	54	DFT-SCS-15KHz	Bottom Side	5mm	Ant 2	DSI 7	349000	1745	18.90	20.20	1.349	-	-	-0.13	0.885	1.194	0.11
	2nd	FR1 n66 Other PA	40M	QPSK	108	54	DFT-SCS-15KHz	Bottom Side	5mm	Ant 2	DSI 7	349000	1745	18.81	20.20	1.377	-	-	0.03	0.846	1.165	
	1st	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 1	DSI 7	349000	1745	13.65	15.00	1.365	-	-	-0.06	0.456	0.622	0.09
	2nd	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 1	DSI 7	349000	1745	13.57	15.00	1.390	-	-	-0.02	0.438	0.609	
	1st	FR1 n66 Other PA	40M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 1	DSI 7	349000	1745	13.60	15.00	1.380	-	-	0.06	0.431	0.595	0.16
	2nd	FR1 n66 Other PA	40M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 1	DSI 7	349000	1745	13.56	15.00	1.393	-	-	0.06	0.412	0.574	
1900MHz																						
	1st	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Bottom Side	5mm	Ant 2	DSI 7	661	1880	22.58	23.40	1.208	-	-	-0.01	1.060	1.280	0.44
31	2nd	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Bottom Side	5mm	Ant 2	DSI 7	661	1880	22.53	23.40	1.222	-	-	0.04	0.948	1.158	
	1st	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Back	5mm	Ant 1	DSI 7	661	1880	16.33	17.30	1.250	-	-	0.07	0.505	0.631	0.59
	2nd	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Back	5mm	Ant 1	DSI 7	661	1880	16.27	17.30	1.268	-	-	-0.09	0.435	0.551	
	1st	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	5mm	Ant 2	DSI 7	9538	1907.6	19.01	20.00	1.256	-	-	0.03	1.020	1.281	0.11
32	2nd	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	5mm	Ant 2	DSI 7	9538	1907.6	18.88	20.00	1.294	-	-	0.06	0.966	1.250	



FCC SAR Test Report

Report No. : FA3D1818-01

1st	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	5mm	Ant 2	DSI 7	9262	1852.4	19.00	20.00	1.259	-	-	-0.15	0.842	1.060	0.08	
2nd	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	5mm	Ant 2	DSI 7	9262	1852.4	18.93	20.00	1.279	-	-	0.02	0.813	1.040		
1st	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 1	DSI 7	9400	1880	11.83	12.60	1.194	-	-	-0.07	0.524	0.626	0.16	
2nd	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 1	DSI 7	9400	1880	11.75	12.60	1.216	-	-	0.09	0.497	0.604		
2nd	LTE Band 2	20M	QPSK	1	0	-	Front	5mm	Ant 2	DSI 7	18900	1880	17.66	19.00	1.361	-	-	-0.1	0.487	0.663	0.16	
2nd	LTE Band 2	20M	QPSK	50	0	-	Front	5mm	Ant 2	DSI 7	18900	1880	17.63	19.00	1.371	-	-	-0.06	0.454	0.622		
2nd	LTE Band 2	20M	QPSK	1	0	-	Back	5mm	Ant 2	DSI 7	18900	1880	17.66	19.00	1.361	-	-	-0.01	0.412	0.561		
2nd	LTE Band 2	20M	QPSK	50	0	-	Back	5mm	Ant 2	DSI 7	18900	1880	17.63	19.00	1.371	-	-	0.03	0.228	0.313		
2nd	LTE Band 2	20M	QPSK	1	0	-	Left Side	5mm	Ant 2	DSI 7	18900	1880	17.66	19.00	1.361	-	-	0.1	0.104	0.142		
2nd	LTE Band 2	20M	QPSK	50	0	-	Left Side	5mm	Ant 2	DSI 7	18900	1880	17.63	19.00	1.371	-	-	0.16	0.054	0.074		
2nd	LTE Band 2	20M	QPSK	1	0	-	Right Side	5mm	Ant 2	DSI 7	18900	1880	17.66	19.00	1.361	-	-	-0.06	0.254	0.346		
2nd	LTE Band 2	20M	QPSK	50	0	-	Right Side	5mm	Ant 2	DSI 7	18900	1880	17.63	19.00	1.371	-	-	0.02	0.246	0.337		
2nd	LTE Band 2	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 2	DSI 7	18900	1880	17.66	19.00	1.361	-	-	-0.16	0.662	0.901		
33	2nd	LTE Band 2	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 2	DSI 7	18700	1860	17.59	19.00	1.384	-	-	-0.01	0.712		0.985
2nd	LTE Band 2	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 2	DSI 7	19100	1900	17.62	19.00	1.374	-	-	0.05	0.696	0.956		
2nd	LTE Band 2	20M	QPSK	50	0	-	Bottom Side	5mm	Ant 2	DSI 7	18900	1880	17.63	19.00	1.371	-	-	-0.03	0.655	0.898		
2nd	LTE Band 2	20M	QPSK	50	0	-	Bottom Side	5mm	Ant 2	DSI 7	18700	1860	17.48	19.00	1.419	-	-	0.17	0.678	0.962		
2nd	LTE Band 2	20M	QPSK	50	0	-	Bottom Side	5mm	Ant 2	DSI 7	19100	1900	17.42	19.00	1.439	-	-	-0.15	0.671	0.965		
2nd	LTE Band 2	20M	QPSK	100	0	-	Bottom Side	5mm	Ant 2	DSI 7	18900	1880	17.52	19.00	1.406	-	-	0.16	0.657	0.924		
2nd	LTE Band 2	20M	QPSK	1	0	-	Front	5mm	Ant 1	DSI 7	18900	1880	13.36	14.70	1.361	-	-	-0.04	0.241	0.328		
2nd	LTE Band 2	20M	QPSK	50	0	-	Front	5mm	Ant 1	DSI 7	18900	1880	13.31	14.70	1.377	-	-	-0.08	0.166	0.229		
2nd	LTE Band 2	20M	QPSK	1	0	-	Back	5mm	Ant 1	DSI 7	18900	1880	13.36	14.70	1.361	-	-	-0.06	0.441	0.600		
2nd	LTE Band 2	20M	QPSK	50	0	-	Back	5mm	Ant 1	DSI 7	18900	1880	13.31	14.70	1.377	-	-	-0.04	0.304	0.419		
2nd	LTE Band 2	20M	QPSK	1	0	-	Left Side	5mm	Ant 1	DSI 7	18900	1880	13.36	14.70	1.361	-	-	0.06	0.288	0.392		
2nd	LTE Band 2	20M	QPSK	50	0	-	Left Side	5mm	Ant 1	DSI 7	18900	1880	13.31	14.70	1.377	-	-	0.08	0.205	0.282		
2nd	LTE Band 2	20M	QPSK	1	0	-	Right Side	5mm	Ant 1	DSI 7	18900	1880	13.36	14.70	1.361	-	-	0.05	0.020	0.027		
2nd	LTE Band 2	20M	QPSK	50	0	-	Right Side	5mm	Ant 1	DSI 7	18900	1880	13.31	14.70	1.377	-	-	-0.11	0.014	0.019		
2nd	LTE Band 2	20M	QPSK	1	0	-	Top Side	5mm	Ant 1	DSI 7	18900	1880	13.36	14.70	1.361	-	-	-0.12	0.414	0.564		
2nd	LTE Band 2	20M	QPSK	50	0	-	Top Side	5mm	Ant 1	DSI 7	18900	1880	13.31	14.70	1.377	-	-	-0.02	0.289	0.398		
2600MHz																						
1st	LTE Band 7	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 2	DSI 7	21350	2560	19.13	20.40	1.340	-	-	0.01	0.952	1.275	0.11	
2nd	LTE Band 7	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 2	DSI 7	21350	2560	19.05	20.40	1.365	-	-	0.02	0.910	1.242		
1st	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 2	DSI 7	21100	2535	19.15	20.40	1.334	-	-	-0.12	0.641	0.855	0.10	
2nd	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 2	DSI 7	21100	2535	19.09	20.40	1.352	-	-	0.03	0.618	0.836		
1st	LTE Band 7	20M	QPSK	1	0	-	Left Side	5mm	Ant 10	DSI 7	21100	2535	17.02	18.00	1.253	-	-	-0.04	0.499	0.625	0.15	
2nd	LTE Band 7	20M	QPSK	1	0	-	Left Side	5mm	Ant 10	DSI 7	21100	2535	16.93	18.00	1.279	-	-	-0.03	0.472	0.604		
1st	LTE Band 7	20M	QPSK	1	0	-	Top Side	5mm	Ant 1	DSI 7	21100	2535	12.27	13.20	1.239	-	-	0.01	0.497	0.616	0.04	
2nd	LTE Band 7	20M	QPSK	1	0	-	Top Side	5mm	Ant 1	DSI 7	21100	2535	12.19	13.20	1.262	-	-	0.02	0.484	0.611		
1st	LTE Band 7	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 0	DSI 7	21350	2560	20.89	21.90	1.262	-	-	0.06	1.020	1.287	0.04	
34	2nd	LTE Band 7	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 0	DSI 7	21350	2560	20.74	21.90	1.306	-	-	-0.07	0.976		1.275
1st	LTE Band 7	20M	QPSK	1	0	-	Front	5mm	Ant 0	DSI 7	21100	2535	20.94	21.90	1.247	-	-	0.04	0.727	0.907	0.04	
2nd	LTE Band 7	20M	QPSK	1	0	-	Front	5mm	Ant 0	DSI 7	21100	2535	20.82	21.90	1.282	-	-	0.02	0.701	0.899		
1st	LTE Band 41	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 2	DSI 7	41490	2680	21.28	22.50	1.324	62.9	1.006	0.01	0.966	1.287	1.00	
2nd	LTE Band 41	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 2	DSI 7	41490	2680	21.12	22.50	1.374	62.9	1.006	0.01	0.739	1.022		
1st	LTE Band 41 HPUE	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 2	DSI 7	41490	2680	22.92	24.10	1.312	42.9	1.009	-0.01	0.952	1.260	1.14	
2nd	LTE Band 41 HPUE	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 2	DSI 7	41490	2680	22.84	24.10	1.337	42.9	1.009	0.01	0.719	0.970		
1st	LTE Band 41	20M	QPSK	1	0	-	Top Side	5mm	Ant 1	DSI 7	40620	2593	12.85	13.90	1.274	62.9	1.006	0.03	0.495	0.634	0.31	
2nd	LTE Band 41	20M	QPSK	1	0	-	Top Side	5mm	Ant 1	DSI 7	40620	2593	12.75	13.90	1.303	62.9	1.006	0.01	0.451	0.591		
1st	LTE Band 41 HPUE	20M	QPSK	1	0	-	Top Side	5mm	Ant 1	DSI 7	40620	2593	14.52	15.50	1.253	42.9	1.009	0.03	0.489	0.618	0.31	
2nd	LTE Band 41 HPUE	20M	QPSK	1	0	-	Top Side	5mm	Ant 1	DSI 7	40620	2593	14.40	15.50	1.288	42.9	1.009	0.04	0.443	0.576		
1st	LTE Band 41	20M	QPSK	1	0	-	Left Side	5mm	Ant 10	DSI 7	40620	2593	18.32	19.20	1.225	62.9	1.006	-0.02	0.507	0.625	0.13	
2nd	LTE Band 41	20M	QPSK	1	0	-	Left Side	5mm	Ant 10	DSI 7	40620	2593	18.25	19.20	1.245	62.9	1.006	-0.1	0.485	0.607		
1st	LTE Band 41 HPUE	20M	QPSK	1	0	-	Left Side	5mm	Ant 10	DSI 7	40620	2593	19.96	20.80	1.213	42.9	1.009	-0.02	0.503	0.616	0.02	
2nd	LTE Band 41 HPUE	20M	QPSK	1	0	-	Left Side	5mm	Ant 10	DSI 7	40620	2593	19.91	20.80	1.227	42.9	1.009	-0.04	0.495	0.613		



FCC SAR Test Report

Report No. : FA3D1818-01

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Deviation d _{dB} (dB)				
1st	LTE Band 41	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 0	DSI 7	41490	2680	18.62	19.90	1.343	62.9	1.006	0.01	0.964	1.302	1.02
35 2nd	LTE Band 41	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 0	DSI 7	41490	2680	18.46	19.90	1.393	62.9	1.006	0.01	0.734	1.029	1.02
1st	LTE Band 41 HPUe	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 0	DSI 7	41490	2680	20.15	21.50	1.365	42.9	1.009	0.02	0.931	1.282	1.02
2nd	LTE Band 41 HPUe	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 0	DSI 7	41490	2680	20.04	21.50	1.400	42.9	1.009	-0.06	0.718	1.014	1.02
1st	FR1 n41	100M	QPSK	1	1	DFT-SCS-30KHz	Bottom Side	5mm	Ant 2	DSI 7	518598	2592.99	18.65	19.50	1.216	-	-	-0.03	1.050	1.277	0.08
36 2nd	FR1 n41	100M	QPSK	1	1	DFT-SCS-30KHz	Bottom Side	5mm	Ant 2	DSI 7	518598	2592.99	18.56	19.50	1.242	-	-	-0.09	1.010	1.254	0.08
1st	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 2	DSI 7	518598	2592.99	18.59	19.50	1.233	-	-	0.08	0.668	0.824	0.04
2nd	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 2	DSI 7	518598	2592.99	18.48	19.50	1.265	-	-	0.03	0.645	0.816	0.04
1st	FR1 n41	100M	QPSK	1	1	DFT-SCS-30KHz	Top Side	5mm	Ant 1	DSI 7	518598	2592.99	12.60	13.50	1.230	-	-	-0.07	0.497	0.611	0.07
2nd	FR1 n41	100M	QPSK	1	1	DFT-SCS-30KHz	Top Side	5mm	Ant 1	DSI 7	518598	2592.99	12.54	13.50	1.247	-	-	-0.03	0.482	0.601	0.07
1st	FR1 n41	100M	QPSK	1	1	DFT-SCS-30KHz	Left Side	5mm	Ant 10	DSI 7	518598	2592.99	20.00	21.30	1.349	-	-	0.02	0.460	0.621	0.23
2nd	FR1 n41	100M	QPSK	1	1	DFT-SCS-30KHz	Left Side	5mm	Ant 10	DSI 7	518598	2592.99	19.91	21.30	1.377	-	-	-0.12	0.428	0.589	0.23
1st	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Bottom Side	5mm	Ant 0	DSI 7	518598	2592.99	18.40	19.60	1.318	-	-	-0.05	0.954	1.258	0.06
2nd	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Bottom Side	5mm	Ant 0	DSI 7	518598	2592.99	18.30	19.60	1.349	-	-	0.03	0.920	1.241	0.06
1st	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Front	5mm	Ant 0	DSI 7	518598	2592.99	18.40	19.60	1.318	-	-	-0.01	0.690	0.910	0.06
2nd	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Front	5mm	Ant 0	DSI 7	518598	2592.99	18.30	19.60	1.349	-	-	0.06	0.666	0.898	0.06
3500MHz																					
1st	LTE Band 42 Part 27Q	20M	QPSK	1	0	-	Left Side	5mm	Ant 7	DSI 7	42590	3500	17.00	18.60	1.445	62.9	1.006	-0.09	0.408	0.593	0.14
37 2nd	LTE Band 42 Part 27Q	20M	QPSK	1	0	-	Left Side	5mm	Ant 7	DSI 7	42590	3500	16.95	18.60	1.462	62.9	1.006	-0.08	0.390	0.574	0.14
1st	FR1 n77 Part 27O	100M	QPSK	135	69	DFT-SCS-30KHz	Left Side	5mm	Ant 7	DSI 7	556000	3840	14.58	15.40	1.208	-	-	-0.17	0.521	0.629	0.15
2nd	FR1 n77 Part 27O	100M	QPSK	135	69	DFT-SCS-30KHz	Left Side	5mm	Ant 7	DSI 7	556000	3840	14.49	15.40	1.233	-	-	-0.08	0.492	0.607	0.15
1st	FR1 n77 Part 27O	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 4	DSI 7	556000	3840	16.44	17.50	1.276	-	-	0.08	0.482	0.615	0.02
2nd	FR1 n77 Part 27O	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 4	DSI 7	556000	3840	16.28	17.50	1.324	-	-	-0.03	0.467	0.618	0.02
1st	FR1 n77 Part 27O	100M	QPSK	1	1	DFT-SCS-30KHz	Right Side	5mm	Ant 8	DSI 7	556000	3840	20.25	21.30	1.274	-	-	0.03	1.000	1.274	0.48
38 2nd	FR1 n77 Part 27O	100M	QPSK	1	1	DFT-SCS-30KHz	Right Side	5mm	Ant 8	DSI 7	556000	3840	20.18	21.30	1.294	-	-	-0.12	0.881	1.140	0.48
1st	FR1 n77 Part 27O	100M	QPSK	1	1	DFT-SCS-30KHz	Right Side	5mm	Ant 5	DSI 7	556000	3840	11.95	13.50	1.429	-	-	0.04	0.440	0.629	0.45
2nd	FR1 n77 Part 27O	100M	QPSK	1	1	DFT-SCS-30KHz	Right Side	5mm	Ant 5	DSI 7	556000	3840	11.91	13.50	1.442	-	-	0.09	0.393	0.567	0.45

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Deviation d _{dB} (dB)	
WLAN/BT																		
1st	WLAN2.4GHz	802.11b 1Mbps	Top Side	5mm	Ant 6+3(3)	Hotspot	1	2412	14.09	16.00	1.552	100	1.000	-0.03	0.387	0.601	1.21	
39 2nd	WLAN2.4GHz	802.11b 1Mbps	Top Side	5mm	Ant 6+3(3)	Hotspot	1	2412	14.03	16.00	1.574	100	1.000	-0.02	0.289	0.455	1.21	
1st	Bluetooth	1Mbps	Right Side	5mm	Ant 6	Hotspot	78	2480	12.62	13.50	1.225	76.94	1.083	-0.09	0.215	0.285	0.33	
40 2nd	Bluetooth	1Mbps	Right Side	5mm	Ant 6	Hotspot	78	2480	12.51	13.50	1.256	76.94	1.083	-0.06	0.194	0.264	0.33	
1st	Bluetooth	1Mbps	Top Side	5mm	Ant 3	Hotspot	0	2402	12.76	13.50	1.186	76.61	1.087	-0.01	0.219	0.282	1.20	
2nd	Bluetooth	1Mbps	Top Side	5mm	Ant 3	Hotspot	0	2402	12.67	13.50	1.211	76.61	1.087	-0.03	0.163	0.214	1.20	
1st	WLAN5.2GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 5+4(4)	Hotspot	42	5210	12.36	14.00	1.459	100	1.000	0.05	0.437	0.638	1.16	
41 2nd	WLAN5.2GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 5+4(4)	Hotspot	42	5210	12.29	14.00	1.483	100	1.000	0.05	0.330	0.489	1.16	
1st	WLAN5.8GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 5+4(4)	Hotspot	155	5775	10.33	12.00	1.469	100	1.000	0.06	0.431	0.633	0.13	
42 2nd	WLAN5.8GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 5+4(4)	Hotspot	155	5775	10.25	12.00	1.496	100	1.000	0.08	0.411	0.615	0.13	



17.3 Body Worn Accessory SAR

Plot No.	No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Deviation dB
750MHz																						
	1st	LTE Band 12	10M	QPSK	1	0	-	Back	5mm	Ant 0	DSI 3	23095	707.5	22.50	24.00	1.413	-	-	-0.07	0.604	0.853	0.08
	2nd	LTE Band 12	10M	QPSK	1	0	-	Back	5mm	Ant 0	DSI 3	23095	707.5	22.41	24.00	1.442	-	-	-0.04	0.581	0.838	
	1st	LTE Band 12	10M	QPSK	1	0	-	Back	5mm	Ant 1	DSI 3	23095	707.5	22.50	24.00	1.413	-	-	-0.12	0.617	0.872	0.14
43	2nd	LTE Band 12	10M	QPSK	1	0	-	Back	5mm	Ant 1	DSI 3	23095	707.5	22.36	24.00	1.459	-	-	-0.08	0.579	0.845	
835MHz																						
	1st	GSM850	-	-	-	-	GPRS (4 Tx slots)	Back	5mm	Ant 0	DSI 3	251	848.8	26.87	27.90	1.268	-	-	-0.01	0.767	0.972	0.09
44	2nd	GSM850	-	-	-	-	GPRS (4 Tx slots)	Back	5mm	Ant 0	DSI 3	251	848.8	26.83	27.90	1.279	-	-	0.02	0.745	0.953	
	1st	GSM850	-	-	-	-	GPRS (4 Tx slots)	Back	5mm	Ant 1	DSI 3	189	836.4	26.42	27.40	1.253	-	-	-0.01	0.663	0.831	0.78
	2nd	GSM850	-	-	-	-	GPRS (4 Tx slots)	Back	5mm	Ant 1	DSI 3	189	836.4	26.31	27.40	1.285	-	-	0.02	0.541	0.695	
	1st	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	DSI 3	4233	846.6	22.18	24.00	1.521	-	-	0.02	0.833	1.267	0.35
45	2nd	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	DSI 3	4233	846.6	22.09	24.00	1.552	-	-	-0.06	0.753	1.169	
	1st	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 1	DSI 3	4182	836.4	22.71	24.00	1.346	-	-	-0.05	0.655	0.882	0.15
	2nd	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 1	DSI 3	4182	836.4	22.64	24.00	1.368	-	-	-0.05	0.623	0.852	
	1st	LTE Band 26	15M	QPSK	1	0	-	Back	5mm	Ant 0	DSI 3	26865	831.5	22.82	24.00	1.312	-	-	-0.03	0.545	0.715	0.26
	2nd	LTE Band 26	15M	QPSK	1	0	-	Back	5mm	Ant 0	DSI 3	26865	831.5	22.75	24.00	1.334	-	-	0.02	0.505	0.673	
	1st	LTE Band 26	15M	QPSK	1	0	-	Back	5mm	Ant 1	DSI 3	26865	831.5	22.77	24.00	1.327	-	-	-0.01	0.572	0.759	0.04
46	2nd	LTE Band 26	15M	QPSK	1	0	-	Back	5mm	Ant 1	DSI 3	26865	831.5	22.72	24.00	1.343	-	-	-0.07	0.560	0.752	
	1st	FR1 n26(n5)	20M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 0	DSI 3	166300	831.5	22.86	24.00	1.300	-	-	0.02	0.569	0.740	0.35
	2nd	FR1 n5	20M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 0	DSI 3	167300	836.5	22.75	24.00	1.334	-	-	0.05	0.512	0.683	
	1st	FR1 n26(n5)	20M	QPSK	50	28	DFT-SCS-15KHz	Back	5mm	Ant 1	DSI 3	166300	831.5	22.46	24.00	1.426	-	-	-0.04	0.612	0.872	0.33
47	2nd	FR1 n5	20M	QPSK	50	28	DFT-SCS-15KHz	Back	5mm	Ant 1	DSI 3	167300	836.5	22.29	24.00	1.483	-	-	0.06	0.545	0.808	
1750MHz																						
	1st	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Front	5mm	Ant 2	DSI 3	1312	1712.4	18.78	20.10	1.355	-	-	-0.09	0.947	1.283	0.07
48	2nd	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Front	5mm	Ant 2	DSI 3	1312	1712.4	18.64	20.10	1.400	-	-	-0.14	0.902	1.262	
	1st	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 2	DSI 3	1513	1752.6	18.75	20.10	1.365	-	-	-0.11	0.818	1.116	0.07
	2nd	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 2	DSI 3	1513	1752.6	18.60	20.10	1.413	-	-	0.02	0.778	1.099	
	1st	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 1	DSI 3	1312	1712.4	14.73	15.70	1.250	-	-	-0.01	0.708	0.885	0.12
	2nd	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 1	DSI 3	1312	1712.4	14.65	15.70	1.274	-	-	-0.02	0.675	0.860	
	1st	LTE Band 66	20M	QPSK	1	0	-	Front	5mm	Ant 2	DSI 3	132072	1720	19.72	21.00	1.343	-	-	-0.02	0.963	1.293	0.05
49	2nd	LTE Band 66	20M	QPSK	1	0	-	Front	5mm	Ant 2	DSI 3	132072	1720	19.58	21.00	1.387	-	-	-0.09	0.921	1.277	
	1st	LTE Band 66	20M	QPSK	1	0	-	Back	5mm	Ant 2	DSI 3	132572	1770	19.70	21.00	1.349	-	-	-0.12	0.826	1.114	0.09
	2nd	LTE Band 66	20M	QPSK	1	0	-	Back	5mm	Ant 2	DSI 3	132572	1770	19.57	21.00	1.390	-	-	0.02	0.785	1.091	
	1st	LTE Band 66	20M	QPSK	1	0	-	Back	5mm	Ant 1	DSI 3	132072	1720	14.72	15.70	1.253	-	-	-0.06	0.709	0.888	0.09
	2nd	LTE Band 66	20M	QPSK	1	0	-	Back	5mm	Ant 1	DSI 3	132072	1720	14.59	15.70	1.291	-	-	-0.04	0.673	0.869	
	1st	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Front	5mm	Ant 2	DSI 3	349000	1745	20.61	21.90	1.346	-	-	0.01	0.963	1.296	0.44
50	2nd	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Front	5mm	Ant 2	DSI 3	349000	1745	20.57	21.90	1.358	-	-	-0.05	0.862	1.171	
	1st	FR1 n66 Other PA	40M	QPSK	1	1	DFT-SCS-15KHz	Front	5mm	Ant 2	DSI 3	349000	1745	20.56	21.90	1.361	-	-	0.01	0.874	1.190	0.14
	2nd	FR1 n66 Other PA	40M	QPSK	1	1	DFT-SCS-15KHz	Front	5mm	Ant 2	DSI 3	349000	1745	20.44	21.90	1.400	-	-	0.03	0.823	1.152	
	1st	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 1	DSI 3	349000	1745	15.85	16.80	1.245	-	-	0.05	0.702	0.874	0.03
	2nd	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 1	DSI 3	349000	1745	15.78	16.80	1.265	-	-	-0.08	0.686	0.868	
	1st	FR1 n66 Other PA	40M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 1	DSI 3	349000	1745	15.77	16.80	1.268	-	-	0.16	0.665	0.843	0.04
	2nd	FR1 n66 Other PA	40M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 1	DSI 3	349000	1745	15.70	16.80	1.288	-	-	0.06	0.648	0.835	
1900MHz																						
	1st	GSM1900	-	-	-	-	GPRS (3 Tx slots)	Front	5mm	Ant 2	DSI 3	661	1880	24.78	26.00	1.324	-	-	-0.08	0.981	1.299	0.46
51	2nd	GSM1900	-	-	-	-	GPRS (3 Tx slots)	Front	5mm	Ant 2	DSI 3	661	1880	24.65	26.00	1.365	-	-	-0.04	0.857	1.169	
	1st	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Back	5mm	Ant 1	DSI 3	661	1880	18.35	19.10	1.189	-	-	-0.08	0.678	0.806	0.66
	2nd	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Back	5mm	Ant 1	DSI 3	661	1880	18.30	19.10	1.202	-	-	-0.09	0.576	0.693	
	1st	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	5mm	Ant 2	DSI 3	9262	1852.4	20.23	21.40	1.309	-	-	-0.08	0.989	1.295	0.78
52	2nd	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	5mm	Ant 2	DSI 3	9262	1852.4	20.12	21.40	1.343	-	-	-0.12	0.805	1.081	



FCC SAR Test Report

Report No. : FA3D1818-01

	1st	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 1	DSI 3	9400	1880	12.75	14.10	1.365	-	-	-0.02	0.645	0.880	0.10
	2nd	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 1	DSI 3	9400	1880	12.70	14.10	1.380	-	-	-0.05	0.623	0.860	
53	2nd	LTE Band 2	20M	QPSK	1	0	-	Front	5mm	Ant 2	DSI 3	18900	1880	18.95	20.40	1.396	-	-	-0.03	0.805	1.124	
	2nd	LTE Band 2	20M	QPSK	1	0	-	Front	5mm	Ant 2	DSI 3	18700	1860	18.88	20.40	1.419	-	-	0.06	0.821	1.165	
	2nd	LTE Band 2	20M	QPSK	1	0	-	Front	5mm	Ant 2	DSI 3	19100	1900	18.83	20.40	1.435	-	-	-0.15	0.764	1.097	
	2nd	LTE Band 2	20M	QPSK	50	0	-	Front	5mm	Ant 2	DSI 3	18900	1880	18.89	20.40	1.416	-	-	0.16	0.734	1.039	
	2nd	LTE Band 2	20M	QPSK	50	0	-	Front	5mm	Ant 2	DSI 3	18700	1860	18.80	20.40	1.445	-	-	0.14	0.753	1.088	
	2nd	LTE Band 2	20M	QPSK	50	0	-	Front	5mm	Ant 2	DSI 3	19100	1900	18.74	20.40	1.466	-	-	-0.17	0.729	1.068	
	2nd	LTE Band 2	20M	QPSK	100	0	-	Front	5mm	Ant 2	DSI 3	18900	1880	18.86	20.40	1.426	-	-	0.05	0.724	1.032	
	2nd	LTE Band 2	20M	QPSK	1	0	-	Back	5mm	Ant 2	DSI 3	18900	1880	18.95	20.40	1.396	-	-	-0.06	0.682	0.952	
	2nd	LTE Band 2	20M	QPSK	1	0	-	Back	5mm	Ant 2	DSI 3	18700	1860	18.88	20.40	1.419	-	-	-0.13	0.692	0.982	
	2nd	LTE Band 2	20M	QPSK	1	0	-	Back	5mm	Ant 2	DSI 3	19100	1900	18.83	20.40	1.435	-	-	-0.01	0.680	0.976	
	2nd	LTE Band 2	20M	QPSK	50	0	-	Back	5mm	Ant 2	DSI 3	18900	1880	18.89	20.40	1.416	-	-	-0.11	0.662	0.937	
	2nd	LTE Band 2	20M	QPSK	50	0	-	Back	5mm	Ant 2	DSI 3	18700	1860	18.80	20.40	1.445	-	-	0.17	0.656	0.948	
	2nd	LTE Band 2	20M	QPSK	50	0	-	Back	5mm	Ant 2	DSI 3	19100	1900	18.74	20.40	1.466	-	-	-0.05	0.651	0.954	
	2nd	LTE Band 2	20M	QPSK	100	0	-	Back	5mm	Ant 2	DSI 3	18900	1880	18.86	20.40	1.426	-	-	0.01	0.645	0.920	
	2nd	LTE Band 2	20M	QPSK	1	0	-	Front	16mm	Ant 2	DSI 4	18700	1860	21.02	22.50	1.406	-	-	0.06	0.412	0.579	
	2nd	LTE Band 2	20M	QPSK	1	0	-	Back	20mm	Ant 2	DSI 4	18700	1860	21.02	22.50	1.406	-	-	0.02	0.389	0.547	
	2nd	LTE Band 2	20M	QPSK	1	0	-	Front	5mm	Ant 1	DSI 3	18900	1880	13.70	15.10	1.380	-	-	-0.03	0.336	0.464	
	2nd	LTE Band 2	20M	QPSK	50	0	-	Front	5mm	Ant 1	DSI 3	18900	1880	13.66	15.10	1.393	-	-	0.02	0.231	0.322	
2nd	LTE Band 2	20M	QPSK	1	0	-	Back	5mm	Ant 1	DSI 3	18900	1880	13.70	15.10	1.380	-	-	-0.1	0.589	0.813		
2nd	LTE Band 2	20M	QPSK	1	0	-	Back	5mm	Ant 1	DSI 3	18700	1860	13.63	15.10	1.403	-	-	-0.09	0.615	0.863		
2nd	LTE Band 2	20M	QPSK	1	0	-	Back	5mm	Ant 1	DSI 3	19100	1900	13.58	15.10	1.419	-	-	0.06	0.597	0.847		
2nd	LTE Band 2	20M	QPSK	50	0	-	Back	5mm	Ant 1	DSI 3	18900	1880	13.66	15.10	1.393	-	-	0.07	0.574	0.800		
2nd	LTE Band 2	20M	QPSK	50	0	-	Back	5mm	Ant 1	DSI 3	18700	1860	13.53	15.10	1.435	-	-	0.15	0.562	0.807		
2nd	LTE Band 2	20M	QPSK	50	0	-	Back	5mm	Ant 1	DSI 3	19100	1900	13.49	15.10	1.449	-	-	-0.05	0.552	0.800		
2nd	LTE Band 2	20M	QPSK	100	0	-	Back	5mm	Ant 1	DSI 3	18900	1880	13.64	15.10	1.400	-	-	-0.08	0.544	0.761		
2nd	LTE Band 2	20M	QPSK	1	0	-	Front	16mm	Ant 1	DSI 4	18900	1880	22.55	24.00	1.396	-	-	0.02	0.316	0.441		
2nd	LTE Band 2	20M	QPSK	1	0	-	Back	20mm	Ant 1	DSI 4	18700	1860	22.47	24.00	1.422	-	-	0.01	0.456	0.649		
2600MHz																						
	1st	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 2	DSI 3	21100	2535	21.10	22.10	1.259	-	-	0.09	1.010	1.272	0.26
	2nd	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 2	DSI 3	21100	2535	21.04	22.10	1.276	-	-	-0.02	0.938	1.197	
	1st	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 1	DSI 3	21100	2535	16.22	17.10	1.225	-	-	-0.04	0.721	0.883	0.05
	2nd	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 1	DSI 3	21100	2535	16.17	17.10	1.239	-	-	0.04	0.704	0.872	
	1st	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 10	DSI 3	21100	2535	18.56	19.60	1.271	-	-	-0.07	0.371	0.471	0.59
	2nd	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 10	DSI 3	21100	2535	18.47	19.60	1.297	-	-	0.02	0.317	0.411	
	1st	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 0	DSI 3	21350	2560	20.89	22.50	1.449	-	-	0.02	0.889	1.288	0.24
54	2nd	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 0	DSI 3	21350	2560	20.77	22.50	1.489	-	-	-0.04	0.818	1.218	
	1st	LTE Band 7	20M	QPSK	1	0	-	Front	5mm	Ant 0	DSI 3	21100	2535	20.94	22.50	1.432	-	-	-0.16	0.754	1.080	0.14
	2nd	LTE Band 7	20M	QPSK	1	0	-	Front	5mm	Ant 0	DSI 3	21100	2535	20.86	22.50	1.459	-	-	0.02	0.716	1.045	
	1st	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Ant 2	DSI 3	40620	2593	22.41	23.50	1.285	62.9	1.006	-0.02	0.991	1.281	0.06
55	2nd	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Ant 2	DSI 3	40620	2593	22.32	23.50	1.312	62.9	1.006	-0.01	0.957	1.263	
	1st	LTE Band 41 HPUE	20M	QPSK	1	0	-	Back	5mm	Ant 2	DSI 3	40620	2593	23.86	25.10	1.330	42.9	1.009	0.03	0.923	1.239	0.02
	2nd	LTE Band 41 HPUE	20M	QPSK	1	0	-	Back	5mm	Ant 2	DSI 3	40620	2593	23.80	25.10	1.349	42.9	1.009	-0.03	0.906	1.233	
	1st	LTE Band 41	20M	QPSK	1	0	-	Front	5mm	Ant 2	DSI 3	40620	2593	22.41	23.50	1.285	62.9	1.006	-0.01	0.929	1.201	0.06
	2nd	LTE Band 41	20M	QPSK	1	0	-	Front	5mm	Ant 2	DSI 3	40620	2593	22.32	23.50	1.312	62.9	1.006	0.02	0.898	1.185	
	1st	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Ant 1	DSI 3	40620	2593	17.26	18.40	1.300	62.9	1.006	-0.08	0.684	0.895	0.09
	2nd	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Ant 1	DSI 3	40620	2593	17.17	18.40	1.327	62.9	1.006	-0.06	0.656	0.876	
	1st	LTE Band 41 HPUE	20M	QPSK	1	0	-	Back	5mm	Ant 1	DSI 3	40620	2593	19.01	20.00	1.256	42.9	1.009	-0.06	0.680	0.862	0.02
	1st	LTE Band 41 HPUE	20M	QPSK	1	0	-	Back	5mm	Ant 1	DSI 3	40620	2593	18.96	20.00	1.271	42.9	1.009	-0.15	0.670	0.859	
	2nd	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Ant 10	DSI 3	40620	2593	20.70	22.00	1.349	62.9	1.006	-0.08	0.580	0.787	0.09
	1st	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Ant 10	DSI 3	40620	2593	20.64	22.00	1.368	62.9	1.006	-0.04	0.560	0.771	
	2nd	LTE Band 41 HPUE	20M	QPSK	1	0	-	Back	5mm	Ant 10	DSI 3	40620	2593	22.44	23.60	1.306	42.9	1.009	0.03	0.596	0.785	0.38
	1st	LTE Band 41 HPUE	20M	QPSK	1	0	-	Back	5mm	Ant 10	DSI 3	40620	2593	22.40	23.60	1.318	42.9	1.009	0.02	0.541	0.720	



FCC SAR Test Report

Report No. : FA3D1818-01

2nd	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Ant 0	DSI 3	41490	2680	21.76	22.80	1.271	62.9	1.006	-0.07	1.020	1.304	1.03
1st	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Ant 0	DSI 3	41490	2680	21.71	22.80	1.285	62.9	1.006	-0.02	0.795	1.028	
2nd	LTE Band 41 HPUe	20M	QPSK	1	0	-	Back	5mm	Ant 0	DSI 3	41490	2680	23.47	24.40	1.239	42.9	1.009	-0.03	1.000	1.250	1.02
1st	LTE Band 41 HPUe	20M	QPSK	1	0	-	Back	5mm	Ant 0	DSI 3	41490	2680	23.33	24.40	1.279	42.9	1.009	-0.09	0.766	0.989	
2nd	FR1 n41	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 2	DSI 3	518598	2592.99	20.20	21.10	1.230	-	-	0.06	1.030	1.267	1.28
1st	FR1 n41	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 2	DSI 3	518598	2592.99	20.08	21.10	1.265	-	-	-0.09	0.746	0.943	
2nd	FR1 n41	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 1	DSI 3	518598	2592.99	16.05	17.30	1.334	-	-	0.02	0.665	0.887	0.50
1st	FR1 n41	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 1	DSI 3	518598	2592.99	15.99	17.30	1.352	-	-	-0.02	0.584	0.790	
2nd	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 10	DSI 3	518598	2592.99	22.85	24.00	1.303	-	-	-0.02	0.372	0.485	0.08
1st	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 10	DSI 3	518598	2592.99	22.79	24.00	1.321	-	-	-0.02	0.360	0.476	
2nd	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 0	DSI 3	518598	2592.99	19.90	20.80	1.230	-	-	-0.03	1.030	1.267	0.25
56 1st	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 0	DSI 3	518598	2592.99	19.77	20.80	1.268	-	-	-0.08	0.943	1.195	

3500MHz

1st	LTE Band 42 Part 27Q	20M	QPSK	1	0	-	Back	5mm	Ant 7	DSI 3	42590	3500	19.60	20.40	1.202	62.9	1.006	-0.08	0.510	0.617	0.36
57 2nd	LTE Band 42 Part 27Q	20M	QPSK	1	0	-	Back	5mm	Ant 7	DSI 3	42590	3500	19.54	20.40	1.219	62.9	1.006	0.03	0.463	0.568	
1st	FR1 n77 Part 27O	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 7	DSI 3	656000	3840	18.17	19.50	1.358	-	-	-0.06	0.644	0.875	0.05
58 2nd	FR1 n77 Part 27O	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 7	DSI 3	656000	3840	18.08	19.50	1.387	-	-	0.04	0.624	0.865	
1st	FR1 n77 Part 27O	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 4	DSI 3	656000	3840	18.02	19.00	1.253	-	-	-0.08	0.704	0.882	0.29
2nd	FR1 n77 Part 27O	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 4	DSI 3	656000	3840	17.91	19.00	1.285	-	-	-0.05	0.642	0.825	
1st	FR1 n77 Part 27O	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 8	DSI 3	656000	3840	21.75	23.30	1.429	-	-	0.03	0.381	0.544	0.08
2nd	FR1 n77 Part 27O	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 8	DSI 3	656000	3840	21.68	23.30	1.452	-	-	-0.09	0.368	0.534	
1st	FR1 n77 Part 27O	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 5	DSI 3	656000	3840	16.85	17.80	1.245	-	-	0.09	0.705	0.877	0.56
2nd	FR1 n77 Part 27O	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 5	DSI 3	656000	3840	16.77	17.80	1.268	-	-	0.03	0.608	0.771	

Plot No.	No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Deviation d _{dB} (dB)	
WLAN/BT																			
	1st	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	Ant 6+3(6)	Standalone	6	2437	17.71	19.50	1.510	100	1.000	-0.04	0.860	1.299	0.09	
59	2nd	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	Ant 6+3(6)	Standalone	6	2437	17.57	19.50	1.560	100	1.000	-0.07	0.816	1.273		
	2nd	WLAN2.4GHz	802.11g 6Mbps	Back	5mm	Ant 6+3(6)	Standalone	6	2437	17.60	19.50	1.549	98.97	1.010	0.06	0.758	1.186	0.07	
	1st	WLAN2.4GHz	802.11b 1Mbps	Front	5mm	Ant 6+3(6)	Standalone	6	2437	17.71	19.50	1.510	100	1.000	-0.08	0.603	0.911		
	2nd	WLAN2.4GHz	802.11b 1Mbps	Front	5mm	Ant 6+3(6)	Standalone	6	2437	17.57	19.50	1.560	100	1.000	0.02	0.575	0.897	0.08	
60	1st	Bluetooth	1Mbps	Back	5mm	Ant 6	Standalone	78	2480	17.61	18.00	1.094	76.94	1.083	0.01	0.243	0.288		
	2nd	Bluetooth	1Mbps	Back	5mm	Ant 6	Standalone	78	2480	17.54	18.00	1.112	76.94	1.083	0.02	0.235	0.283	0.03	
	1st	Bluetooth	1Mbps	Back	5mm	Ant 3	Standalone	0	2402	17.77	18.00	1.054	76.61	1.087	-0.06	0.240	0.275		
	2nd	Bluetooth	1Mbps	Back	5mm	Ant 3	Standalone	0	2402	17.75	18.00	1.059	76.61	1.087	0.03	0.237	0.273	0.67	
61	1st	WLAN5.3GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 5+4(5)	Standalone	58	5290	14.06	16.00	1.563	100.00	1.000	-0.06	0.761	1.190		
	2nd	WLAN5.3GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 5+4(5)	Standalone	58	5290	14.02	16.00	1.578	100.00	1.000	0.04	0.647	1.021	0.63	
62	1st	WLAN5.5GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 5+4(4)	Standalone	106	5530	13.28	15.00	1.486	100	1.000	-0.06	0.792	1.177		
	2nd	WLAN5.5GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 5+4(4)	Standalone	106	5530	13.19	15.00	1.517	100	1.000	0.09	0.671	1.018	0.07	
63	1st	WLAN5.8GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 5+4(4)	Standalone	155	5775	13.13	14.50	1.371	100	1.000	0.06	0.811	1.112		
	2nd	WLAN5.8GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 5+4(4)	Standalone	155	5775	13.06	14.50	1.393	100	1.000	-0.02	0.785	1.094		

Plot No.	No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured APD (W/m ²)	Deviation d _{dB} (dB)
	1st	WLAN6GHz	802.11ax-HE160 MCS0	Front	5mm	Ant 5+4(4)	Full power	207	6985	10.17	12.00	1.524	100	1.000	0.02	0.113	0.172	0.778	0.65
64	2nd	WLAN6GHz	802.11ax-HE160 MCS0	Front	5mm	Ant 5+4(4)	Full power	207	6985	10.06	12.00	1.563	100	1.000	0.03	0.095	0.148	0.658	



17.4 Product specific 10g SAR

Plot No.	No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)	Deviation d _{dB} (dB)
835MHz																						
	1st	GSM850	-	-	-	-	GPRS (3 Tx slots)	Back	0mm	Ant 0	DSI 6	189	836.4	28.74	30.00	1.337	-	-	0.01	1.410	1.885	0.53
65	2nd	GSM850	-	-	-	-	GPRS (3 Tx slots)	Back	0mm	Ant 0	DSI 6	189	836.4	28.68	30.00	1.355	-	-	-0.13	1.230	1.667	
	1st	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	0mm	Ant 0	DSI 6	4182	836.4	22.32	24.00	1.472	-	-	-0.05	1.260	1.855	0.15
66	2nd	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	0mm	Ant 0	DSI 6	4182	836.4	22.18	24.00	1.521	-	-	0.06	1.180	1.794	
1750MHz																						
	1st	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Front	0mm	Ant 2	DSI 6	1312	1712.4	21.85	22.80	1.245	-	-	0.01	2.520	3.136	0.30
67	2nd	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Front	0mm	Ant 2	DSI 6	1312	1712.4	21.73	22.80	1.279	-	-	0.09	2.290	2.930	
	1st	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Top Side	0mm	Ant 1	DSI 6	1413	1732.6	18.56	19.90	1.361	-	-	-0.01	1.810	2.464	0.06
	2nd	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Top Side	0mm	Ant 1	DSI 6	1413	1732.6	18.47	19.90	1.390	-	-	-0.01	1.750	2.432	
	1st	LTE Band 66	20M	QPSK	1	0	-	Front	0mm	Ant 2	DSI 6	132322	1745	21.93	22.90	1.250	-	-	0.02	2.510	3.138	0.11
68	2nd	LTE Band 66	20M	QPSK	1	0	-	Front	0mm	Ant 2	DSI 6	132322	1745	21.88	22.90	1.265	-	-	0.09	2.420	3.061	
	1st	LTE Band 66	20M	QPSK	1	0	-	Back	0mm	Ant 2	DSI 6	132322	1745	21.93	22.90	1.250	-	-	0.03	1.680	2.100	0.11
	2nd	LTE Band 66	20M	QPSK	1	0	-	Back	0mm	Ant 2	DSI 6	132322	1745	21.88	22.90	1.265	-	-	0.02	1.620	2.049	
	1st	LTE Band 66	20M	QPSK	1	0	-	Top Side	0mm	Ant 1	DSI 6	132572	1770	18.06	19.30	1.330	-	-	-0.01	1.860	2.475	0.63
	2nd	LTE Band 66	20M	QPSK	1	0	-	Top Side	0mm	Ant 1	DSI 6	132572	1770	17.93	19.30	1.371	-	-	-0.04	1.560	2.139	
	1st	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Front	0mm	Ant 2	DSI 6	349000	1745	22.06	23.30	1.330	-	-	0.05	2.350	3.127	0.46
69	2nd	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Front	0mm	Ant 2	DSI 6	349000	1745	22.01	23.30	1.346	-	-	0.01	2.090	2.813	
	1st	FR1 n66 Other PA	40M	QPSK	108	54	DFT-SCS-15KHz	Front	0mm	Ant 2	DSI 6	349000	1745	21.42	23.00	1.439	-	-	0.02	1.750	2.518	0.09
	2nd	FR1 n66 Other PA	40M	QPSK	108	54	DFT-SCS-15KHz	Front	0mm	Ant 2	DSI 6	349000	1745	21.33	23.00	1.469	-	-	0.05	1.680	2.468	
	1st	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Top Side	0mm	Ant 1	DSI 6	349000	1745	18.56	19.90	1.361	-	-	0.06	1.830	2.491	0.12
	2nd	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Top Side	0mm	Ant 1	DSI 6	349000	1745	18.51	19.90	1.377	-	-	0.02	1.760	2.424	
	1st	FR1 n66 Other PA	40M	QPSK	108	54	DFT-SCS-15KHz	Top Side	0mm	Ant 1	DSI 6	349000	1745	18.49	19.90	1.384	-	-	-0.02	1.510	2.089	0.12
	2nd	FR1 n66 Other PA	40M	QPSK	108	54	DFT-SCS-15KHz	Top Side	0mm	Ant 1	DSI 6	349000	1745	18.43	19.90	1.403	-	-	0.01	1.450	2.034	
1900MHz																						
	1st	GSM1900	-	-	-	-	GPRS (3 Tx slots)	Front	0mm	Ant 2	DSI 6	661	1880	24.78	26.00	1.324	-	-	0.03	1.910	2.529	0.53
70	2nd	GSM1900	-	-	-	-	GPRS (3 Tx slots)	Front	0mm	Ant 2	DSI 6	661	1880	24.65	26.00	1.365	-	-	0.01	1.640	2.238	
	1st	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Top Side	0mm	Ant 1	DSI 6	661	1880	20.17	21.00	1.211	-	-	0.02	2.050	2.482	0.49
	2nd	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Top Side	0mm	Ant 1	DSI 6	661	1880	20.12	21.00	1.225	-	-	0.09	1.810	2.217	
	1st	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	0mm	Ant 2	DSI 6	9262	1852.4	21.30	22.80	1.413	-	-	0.02	2.200	3.108	0.60
71	2nd	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	0mm	Ant 2	DSI 6	9262	1852.4	21.19	22.80	1.449	-	-	0.01	1.870	2.709	
	1st	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	0mm	Ant 1	DSI 6	9400	1880	17.22	18.40	1.312	-	-	0.08	1.860	2.441	0.22
	2nd	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	0mm	Ant 1	DSI 6	9400	1880	17.12	18.40	1.343	-	-	0.04	1.730	2.323	
	2nd	LTE Band 2	20M	QPSK	1	0	-	Front	0mm	Ant 2	DSI 6	18900	1880	21.07	22.50	1.390	-	-	0.11	1.890	2.627	
	2nd	LTE Band 2	20M	QPSK	1	0	-	Front	0mm	Ant 2	DSI 6	18700	1860	21.02	22.50	1.406	-	-	-0.04	1.820	2.559	
	2nd	LTE Band 2	20M	QPSK	1	0	-	Front	0mm	Ant 2	DSI 6	19100	1900	20.97	22.50	1.422	-	-	-0.08	1.840	2.617	
	2nd	LTE Band 2	20M	QPSK	50	0	-	Front	0mm	Ant 2	DSI 6	18900	1880	20.11	21.50	1.377	-	-	-0.08	1.510	2.080	
	2nd	LTE Band 2	20M	QPSK	50	0	-	Front	0mm	Ant 2	DSI 6	18700	1860	20.06	21.50	1.393	-	-	0.17	1.480	2.062	
	2nd	LTE Band 2	20M	QPSK	50	0	-	Front	0mm	Ant 2	DSI 6	19100	1900	20.04	21.50	1.400	-	-	0.18	1.450	2.029	
	2nd	LTE Band 2	20M	QPSK	100	0	-	Front	0mm	Ant 2	DSI 6	18900	1880	20.08	21.50	1.387	-	-	-0.04	1.440	1.997	
	2nd	LTE Band 2	20M	QPSK	1	0	-	Back	0mm	Ant 2	DSI 6	18900	1880	21.07	22.50	1.390	-	-	-0.17	1.130	1.571	
	2nd	LTE Band 2	20M	QPSK	50	0	-	Back	0mm	Ant 2	DSI 6	18900	1880	20.11	21.50	1.377	-	-	-0.08	0.896	1.234	
	2nd	LTE Band 2	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 2	DSI 6	18900	1880	21.07	22.50	1.390	-	-	0.08	2.050	2.849	
72	2nd	LTE Band 2	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 2	DSI 6	18700	1860	21.02	22.50	1.406	-	-	-0.02	2.150	3.023	
	2nd	LTE Band 2	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 2	DSI 6	19100	1900	20.97	22.50	1.422	-	-	0.01	2.120	3.015	
	2nd	LTE Band 2	20M	QPSK	50	0	-	Bottom Side	0mm	Ant 2	DSI 6	18900	1880	20.11	21.50	1.377	-	-	-0.01	1.640	2.259	
	2nd	LTE Band 2	20M	QPSK	50	0	-	Bottom Side	0mm	Ant 2	DSI 6	18700	1860	20.06	21.50	1.393	-	-	-0.06	1.700	2.368	
	2nd	LTE Band 2	20M	QPSK	50	0	-	Bottom Side	0mm	Ant 2	DSI 6	19100	1900	20.04	21.50	1.400	-	-	-0.04	1.560	2.183	
	2nd	LTE Band 2	20M	QPSK	100	0	-	Bottom Side	0mm	Ant 2	DSI 6	18900	1880	20.08	21.50	1.387	-	-	-0.09	1.680	2.330	
	2nd	LTE Band 2	20M	QPSK	1	0	-	Front	0mm	Ant 1	DSI 6	18900	1880	17.07	18.50	1.390	-	-	-0.08	1.060	1.473	



FCC SAR Test Report

Report No. : FA3D1818-01

2nd	LTE Band 2	20M	QPSK	50	0	-	Front	0mm	Ant 1	DSI 6	18900	1880	17.05	18.50	1.396	-	-	-0.13	1.030	1.438	
2nd	LTE Band 2	20M	QPSK	1	0	-	Back	0mm	Ant 1	DSI 6	18900	1880	17.07	18.50	1.390	-	-	-0.05	1.250	1.737	
2nd	LTE Band 2	20M	QPSK	50	0	-	Back	0mm	Ant 1	DSI 6	18900	1880	17.05	18.50	1.396	-	-	0.05	0.900	1.257	
2nd	LTE Band 2	20M	QPSK	1	0	-	Left Side	0mm	Ant 1	DSI 6	18900	1880	17.07	18.50	1.390	-	-	-0.13	1.260	1.751	
2nd	LTE Band 2	20M	QPSK	50	0	-	Left Side	0mm	Ant 1	DSI 6	18900	1880	17.05	18.50	1.396	-	-	0.06	1.210	1.690	
2nd	LTE Band 2	20M	QPSK	1	0	-	Top Side	0mm	Ant 1	DSI 6	18900	1880	17.07	18.50	1.390	-	-	-0.03	1.650	2.293	
2nd	LTE Band 2	20M	QPSK	1	0	-	Top Side	0mm	Ant 1	DSI 6	18700	1860	16.99	18.50	1.416	-	-	-0.15	1.620	2.294	
2nd	LTE Band 2	20M	QPSK	1	0	-	Top Side	0mm	Ant 1	DSI 6	19100	1900	17.05	18.50	1.396	-	-	0.01	1.660	2.318	
2nd	LTE Band 2	20M	QPSK	50	0	-	Top Side	0mm	Ant 1	DSI 6	18900	1880	17.05	18.50	1.396	-	-	0.02	1.590	2.220	
2nd	LTE Band 2	20M	QPSK	50	0	-	Top Side	0mm	Ant 1	DSI 6	18700	1860	16.92	18.50	1.439	-	-	0.07	1.600	2.302	
2nd	LTE Band 2	20M	QPSK	50	0	-	Top Side	0mm	Ant 1	DSI 6	19100	1900	17.03	18.50	1.403	-	-	0.16	1.580	2.216	
2nd	LTE Band 2	20M	QPSK	100	0	-	Top Side	0mm	Ant 1	DSI 6	18900	1880	17.03	18.50	1.403	-	-	0.13	1.490	2.090	
2nd	LTE Band 2	20M	QPSK	1	0	-	Front	7mm	Ant 1	DSI 4	18900	1880	22.55	24.00	1.396	-	-	0.03	0.566	0.790	
2nd	LTE Band 2	20M	QPSK	1	0	-	Back	12mm	Ant 1	DSI 4	18900	1880	22.55	24.00	1.396	-	-	0.02	0.423	0.591	
2nd	LTE Band 2	20M	QPSK	1	0	-	Left Side	9mm	Ant 1	DSI 4	18900	1880	22.55	24.00	1.396	-	-	0.01	0.316	0.441	
2nd	LTE Band 2	20M	QPSK	1	0	-	Top Side	15mm	Ant 1	DSI 4	19100	1900	22.54	24.00	1.400	-	-	0.06	0.254	0.355	

2600MHz

73	1st	LTE Band 7	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 2	DSI 6	20850	2510	20.45	21.80	1.365	-	-	-0.03	2.350	3.207	0.17
	2nd	LTE Band 7	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 2	DSI 6	20850	2510	20.29	21.80	1.416	-	-	0.01	2.180	3.086	
	1st	LTE Band 7	20M	QPSK	1	0	-	Front	0mm	Ant 2	DSI 6	21100	2535	20.50	21.80	1.349	-	-	-0.03	1.850	2.496	0.07
	2nd	LTE Band 7	20M	QPSK	1	0	-	Front	0mm	Ant 2	DSI 6	21100	2535	20.45	21.80	1.365	-	-	0.02	1.800	2.456	
	1st	LTE Band 7	20M	QPSK	1	0	-	Top Side	0mm	Ant 1	DSI 6	21100	2535	17.66	18.60	1.242	-	-	-0.15	1.970	2.446	0.12
	2nd	LTE Band 7	20M	QPSK	1	0	-	Top Side	0mm	Ant 1	DSI 6	21100	2535	17.60	18.60	1.259	-	-	-0.01	1.890	2.379	
	1st	LTE Band 7	20M	QPSK	1	0	-	Left Side	0mm	Ant 10	DSI 4	21100	2535	18.56	19.60	1.271	-	-	-0.02	1.950	2.478	0.96
	2nd	LTE Band 7	20M	QPSK	1	0	-	Left Side	0mm	Ant 10	DSI 4	21100	2535	18.47	19.60	1.297	-	-	-0.13	1.530	1.985	
	1st	LTE Band 7	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 0	DSI 6	21350	2560	20.89	22.10	1.321	-	-	0.02	2.420	3.198	0.28
	2nd	LTE Band 7	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 0	DSI 6	21350	2560	20.80	22.10	1.349	-	-	-0.03	2.220	2.995	
74	1st	LTE Band 41	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 2	DSI 6	40620	2593	22.41	23.50	1.285	62.9	1.006	0.01	2.260	2.922	0.03
	2nd	LTE Band 41	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 2	DSI 6	40620	2593	22.32	23.50	1.312	62.9	1.006	0.03	2.200	2.904	
	1st	LTE Band 41 HPUE	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 2	DSI 6	40620	2593	24.61	25.50	1.227	42.9	1.009	-0.02	2.460	3.047	0.29
	2nd	LTE Band 41 HPUE	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 2	DSI 6	40620	2593	24.47	25.50	1.268	42.9	1.009	0.02	2.230	2.852	
	1st	LTE Band 41	20M	QPSK	1	0	-	Top Side	0mm	Ant 1	DSI 6	40620	2593	19.40	20.50	1.288	62.9	1.006	-0.09	1.910	2.475	0.27
	2nd	LTE Band 41	20M	QPSK	1	0	-	Top Side	0mm	Ant 1	DSI 6	40620	2593	19.34	20.50	1.306	62.9	1.006	0.01	1.770	2.326	
	1st	LTE Band 41 HPUE	20M	QPSK	1	0	-	Top Side	0mm	Ant 1	DSI 6	40620	2593	21.03	22.10	1.279	42.9	1.009	0.02	1.850	2.388	0.75
	2nd	LTE Band 41 HPUE	20M	QPSK	1	0	-	Top Side	0mm	Ant 1	DSI 6	40620	2593	20.98	22.10	1.294	42.9	1.009	0.01	1.540	2.011	
	1st	LTE Band 41	20M	QPSK	1	0	-	Left Side	0mm	Ant 10	DSI 4	40620	2593	20.70	22.00	1.349	62.9	1.006	-0.03	1.830	2.483	0.23
	2nd	LTE Band 41	20M	QPSK	1	0	-	Left Side	0mm	Ant 10	DSI 4	40620	2593	20.64	22.00	1.368	62.9	1.006	-0.06	1.710	2.353	
	1st	LTE Band 41 HPUE	20M	QPSK	1	0	-	Left Side	0mm	Ant 10	DSI 4	40620	2593	22.44	23.60	1.306	42.9	1.009	0.03	1.740	2.293	0.19
	2nd	LTE Band 41 HPUE	20M	QPSK	1	0	-	Left Side	0mm	Ant 10	DSI 4	40620	2593	22.40	23.60	1.318	42.9	1.009	-0.03	1.650	2.195	
	1st	LTE Band 41	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 0	DSI 6	41055	2636.5	20.98	22.50	1.419	62.9	1.006	0.08	2.210	3.155	0.46
	2nd	LTE Band 41	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 0	DSI 6	41055	2636.5	20.85	22.50	1.462	62.9	1.006	0.05	1.930	2.839	
	1st	LTE Band 41 HPUE	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 0	DSI 6	41055	2636.5	22.47	24.10	1.455	42.9	1.009	-0.02	2.140	3.143	0.50
	2nd	LTE Band 41 HPUE	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 0	DSI 6	41055	2636.5	22.34	24.10	1.500	42.9	1.009	0.03	1.850	2.799	
75	1st	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Bottom Side	0mm	Ant 2	DSI 6	518598	2592.99	19.50	20.80	1.349	-	-	0.1	2.340	3.157	0.13
	2nd	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Bottom Side	0mm	Ant 2	DSI 6	518598	2592.99	19.46	20.80	1.361	-	-	-0.02	2.250	3.063	
	1st	FR1 n41	100M	QPSK	1	1	DFT-SCS-30KHz	Front	0mm	Ant 2	DSI 6	518598	2592.99	19.54	20.80	1.337	-	-	0.03	2.100	2.807	0.12
	2nd	FR1 n41	100M	QPSK	1	1	DFT-SCS-30KHz	Front	0mm	Ant 2	DSI 6	518598	2592.99	19.47	20.80	1.358	-	-	0.06	2.010	2.730	
	1st	FR1 n41	100M	QPSK	1	1	DFT-SCS-30KHz	Front	0mm	Ant 1	DSI 6	518598	2592.99	19.05	20.60	1.429	-	-	-0.04	1.650	2.358	0.15
	2nd	FR1 n41	100M	QPSK	1	1	DFT-SCS-30KHz	Front	0mm	Ant 1	DSI 6	518598	2592.99	19.01	20.60	1.442	-	-	0.01	1.580	2.279	
	1st	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Bottom Side	0mm	Ant 0	DSI 6	518598	2592.99	20.31	21.30	1.256	-	-	-0.08	2.510	3.153	0.18
	2nd	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Bottom Side	0mm	Ant 0	DSI 6	518598	2592.99	20.22	21.30	1.282	-	-	-0.06	2.360	3.026	
	1st	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Back	0mm	Ant 0	DSI 6	518598	2592.99	20.31	21.30	1.256	-	-	0.03	1.520	1.909	0.12
	2nd	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Back	0mm	Ant 0	DSI 6	518598	2592.99	20.22	21.30	1.282	-	-	0.01	1.450	1.859	

3500MHz



FCC SAR Test Report

Report No. : FA3D1818-01

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)	Deviation d _{dB}			
1st	LTE Band 42 Part 27Q	20M QPSK	1	0	-	Left Side	0mm	Ant 7	DSI 6	42990	3540	19.57	20.40	1.211	62.9	1.006	-0.02	1.820	2.217	0.11
76 2nd	LTE Band 42 Part 27Q	20M QPSK	1	0	-	Left Side	0mm	Ant 7	DSI 6	42990	3540	19.41	20.40	1.256	62.9	1.006	-0.03	1.710	2.161	
1st	FR1 n77 Part 27O	100M QPSK	1	1	DFT-SCS-30KHz	Left Side	0mm	Ant 7	DSI 6	656000	3840	18.20	19.50	1.349	-	-	0.03	1.800	2.428	0.12
2nd	FR1 n77 Part 27O	100M QPSK	1	1	DFT-SCS-30KHz	Left Side	0mm	Ant 7	DSI 6	656000	3840	18.15	19.50	1.365	-	-	0.1	1.730	2.361	
1st	FR1 n77 Part 27O	100M QPSK	135	69	DFT-SCS-30KHz	Back	0mm	Ant 4	DSI 4	656000	3840	22.46	24.00	1.426	-	-	-0.03	1.460	2.081	0.29
2nd	FR1 n77 Part 27O	100M QPSK	135	69	DFT-SCS-30KHz	Back	0mm	Ant 4	DSI 4	656000	3840	22.31	24.00	1.476	-	-	-0.06	1.320	1.948	
1st	FR1 n77 Part 27O	100M QPSK	1	1	DFT-SCS-30KHz	Right Side	0mm	Ant 8	DSI 4	656000	3840	21.75	23.30	1.429	-	-	0.02	2.230	3.186	0.15
77 2nd	FR1 n77 Part 27O	100M QPSK	1	1	DFT-SCS-30KHz	Right Side	0mm	Ant 8	DSI 4	656000	3840	21.68	23.30	1.452	-	-	0.01	2.120	3.078	
1st	FR1 n77 Part 27O	100M QPSK	1	1	DFT-SCS-30KHz	Right Side	0mm	Ant 5	DSI 6	656000	3840	18.35	19.40	1.274	-	-	-0.01	1.940	2.471	0.20
2nd	FR1 n77 Part 27O	100M QPSK	1	1	DFT-SCS-30KHz	Right Side	0mm	Ant 5	DSI 6	656000	3840	18.25	19.40	1.303	-	-	0.07	1.810	2.359	

WLAN/BT																		
Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)	Deviation d _{dB}	
1st	WLAN2.4GHz	802.11b 1Mbps	Top Side	0mm	Ant 6+3(3)	Standalone	11	2462	18.83	20.50	1.469	100	1.000	-0.1	1.180	1.733	0.35	
78 2nd	WLAN2.4GHz	802.11b 1Mbps	Top Side	0mm	Ant 6+3(3)	Standalone	11	2462	18.68	20.50	1.521	100	1.000	-0.04	1.050	1.597		
1st	WLAN5.2GHz	802.11n-HT40 MCS0	Front	0mm	Ant 5+4(5)	Standalone	46	5230	18.12	20.00	1.542	100	1.000	0.07	2.020	3.114	0.19	
79 2nd	WLAN5.2GHz	802.11n-HT40 MCS0	Front	0mm	Ant 5+4(5)	Standalone	46	5230	18.07	20.00	1.560	100	1.000	0.06	1.910	2.979		
1st	WLAN5.3GHz	802.11a 6Mbps	Front	0mm	Ant 5+4(4)	Standalone	60	5300	18.75	20.50	1.496	98.91	1.011	0.02	2.030	3.071	0.14	
80 2nd	WLAN5.3GHz	802.11a 6Mbps	Front	0mm	Ant 5+4(4)	Standalone	60	5300	18.65	20.50	1.531	98.91	1.011	0.06	1.920	2.972		
1st	WLAN5.5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 5+4(5)	Standalone	138	5690	16.92	18.50	1.439	100	1.000	0.03	2.190	3.151	0.12	
81 2nd	WLAN5.5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 5+4(5)	Standalone	138	5690	16.88	18.50	1.452	100	1.000	-0.09	2.110	3.064		
2nd	WLAN5.5GHz	802.11n-HT40 MCS0	Front	0mm	Ant 5+4(4)	Standalone	142	5710	18.73	20.50	1.503	100	1.000	0.02	1.940	2.916	0.13	
1st	WLAN5.5GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Ant 5+4(5)	Standalone	138	5690	16.92	18.50	1.439	100	1.000	-0.05	0.995	1.432		
2nd	WLAN5.5GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Ant 5+4(5)	Standalone	138	5690	16.88	18.50	1.452	100	1.000	0.02	0.957	1.390		
1st	WLAN5.8GHz	802.11n-HT40 MCS0	Front	0mm	Ant 5+4(4)	Standalone	159	5795	18.48	20.00	1.419	100	1.000	0.04	2.210	3.136	0.24	
82 2nd	WLAN5.8GHz	802.11n-HT40 MCS0	Front	0mm	Ant 5+4(4)	Standalone	159	5795	18.44	20.00	1.432	100	1.000	0.09	2.070	2.965		

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)	Measured APD (W/m ²)	Deviation d _{dB}
1st	WLAN6GHz	802.11ax-HE160 MCS0	Front	0mm	Ant 5+4(4)	Full power	207	6985	10.17	12.00	1.524	100	1.000	-0.04	0.082	0.125	1.89	0.52
83 2nd	WLAN6GHz	802.11ax-HE160 MCS0	Front	0mm	Ant 5+4(4)	Full power	207	6985	10.06	12.00	1.563	100	1.000	0.02	0.071	0.111	1.62	



17.5 Repeated SAR Measurement

<1g>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	LTE Band 66	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 2	DSI 7	132072	1720	18.73	19.90	1.309	-	-	0.01	0.960	1	1.257
2nd	LTE Band 66	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 2	DSI 7	132072	1720	18.73	19.90	1.309	-	-	0.06	0.946	1.015	1.238
1st	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	5mm	Ant 2	DSI 7	9538	1907.6	18.88	20.00	1.294	-	-	0.06	0.966	1	1.250
2nd	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	5mm	Ant 2	DSI 7	9538	1907.6	18.88	20.00	1.294	-	-	0.06	0.952	1.015	1.232
1st	FR1 n41	100M	QPSK	1	1	DFT-SCS-30KHz	Bottom Side	5mm	Ant 2	DSI 7	518598	2592.99	18.56	19.50	1.242	-	-	-0.09	1.010	1	1.254
2nd	FR1 n41	100M	QPSK	1	1	DFT-SCS-30KHz	Bottom Side	5mm	Ant 2	DSI 7	518598	2592.99	18.56	19.50	1.242	-	-	0.02	0.985	1.025	1.223
1st	FR1 n77 Part 270	100M	QPSK	1	1	DFT-SCS-30KHz	Right Side	5mm	Ant 8	DSI 7	656000	3840	20.18	21.30	1.294	-	-	-0.12	0.881	1	1.140
2nd	FR1 n77 Part 270	100M	QPSK	1	1	DFT-SCS-30KHz	Right Side	5mm	Ant 8	DSI 7	656000	3840	20.18	21.30	1.294	-	-	0.05	0.875	1.007	1.132
1st	WLAN2.4GHz	-	-	-	-	802.11b 1Mbps	Back	5mm	Ant 6+3(6)	Standalone	6	2437	17.57	19.50	1.560	100	1.000	-0.07	0.816	1	1.273
2nd	WLAN2.4GHz	-	-	-	-	802.11b 1Mbps	Back	5mm	Ant 6+3(6)	Standalone	6	2437	17.57	19.50	1.560	100	1.000	0.02	0.801	1.019	1.249

<10g>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Ratio	Reported 10g SAR (W/kg)
1st	LTE Band 66	20M	QPSK	1	0	-	Front	0mm	Ant 2	DSI 6	132322	1745	21.88	22.90	1.265	-	-	0.09	2.420	1	3.061
2nd	LTE Band 66	20M	QPSK	1	0	-	Front	0mm	Ant 2	DSI 6	132322	1745	21.88	22.90	1.265	-	-	0.02	2.380	1.017	3.010
1st	LTE Band 2	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 2	DSI 6	18700	1860	21.02	22.50	1.406	-	-	-0.02	2.150	1	3.023
2nd	LTE Band 2	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 2	DSI 6	18700	1860	21.02	22.50	1.406	-	-	0.06	2.110	1.019	2.967
1st	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Bottom Side	0mm	Ant 0	DSI 6	518598	2592.99	20.22	21.30	1.282	-	-	-0.06	2.360	1	3.026
2nd	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Bottom Side	0mm	Ant 0	DSI 6	518598	2592.99	20.22	21.30	1.282	-	-	0.02	2.310	1.022	2.962
1st	FR1 n77 Part 270	100M	QPSK	1	1	DFT-SCS-30KHz	Right Side	0mm	Ant 8	DSI 4	656000	3840	21.68	23.30	1.452	-	-	0.01	2.120	1	3.078
2nd	FR1 n77 Part 270	100M	QPSK	1	1	DFT-SCS-30KHz	Right Side	0mm	Ant 8	DSI 4	656000	3840	21.68	23.30	1.452	-	-	0.02	2.100	1.010	3.049
1st	WLAN5.5GHz	-	-	-	-	802.11ac-VHT80 MCS0	Front	0mm	Ant 5+4(5)	Standalone	138	5690	16.88	18.50	1.452	100	1.000	-0.09	2.110	1	3.064
2nd	WLAN5.5GHz	-	-	-	-	802.11ac-VHT80 MCS0	Front	0mm	Ant 5+4(5)	Standalone	138	5690	16.88	18.50	1.452	100	1.000	0.06	2.080	1.014	3.020
1st	WLAN5.8GHz	-	-	-	-	802.11n-HT40 MCS0	Front	0mm	Ant 5+4(4)	Standalone	159	5795	18.44	20.00	1.432	100	1.000	0.09	2.070	1	2.965
2nd	WLAN5.8GHz	-	-	-	-	802.11n-HT40 MCS0	Front	0mm	Ant 5+4(4)	Standalone	159	5795	18.44	20.00	1.432	100	1.000	0.02	2.050	1.010	2.936

General Note:

- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
- Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
- Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
- The ratio is the difference in percentage between original and repeated *measured SAR*.
- All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

18. Simultaneous Transmission Analysis

No.	Simultaneous Transmission Configurations	Portable Handset			
		Head	Body-worn	Hotspot	Product specific 10g SAR
1.	WWAN + WLAN2.4GHz	Yes	Yes	Yes	Yes
2.	WWAN + WLAN5GHz	Yes	Yes	Yes	Yes
3.	WWAN + WLAN6GHz	Yes	Yes	Yes	Yes
4.	WWAN + Bluetooth	Yes	Yes	Yes	Yes
5.	WLAN5GHz+ Bluetooth	Yes	Yes	Yes	Yes
6.	WLAN6GHz+ Bluetooth	Yes	Yes	Yes	Yes
7.	WWAN + WLAN5GHz+ Bluetooth	Yes	Yes	Yes	Yes
8.	WWAN + WLAN6GHz+ Bluetooth	Yes	Yes	Yes	Yes
9.	WWAN + WLAN2.4GHz+ NFC				Yes
10.	WWAN + WLAN5GHz+ NFC				Yes
11.	WWAN + WLAN6GHz+ NFC				Yes
12.	WWAN + Bluetooth+ NFC				Yes
13.	WLAN5GHz+ Bluetooth+ NFC				Yes
14.	WLAN6GHz+ Bluetooth+ NFC				Yes
15.	WWAN + WLAN5GHz+ Bluetooth+ NFC				Yes
16.	WWAN + WLAN6GHz+ Bluetooth+ NFC				Yes

General Note:

- This device supports VoIP in GPRS, EGPRS, WCDMA, LTE and 5GNR (e.g. for 3rd-party VoIP), LTE supports VoLTE operation.
- WWAN above includes 5G NR bands and EN-DC combination.
- EUT will choose each GSM, WCDMA, LTE and 5GNR according to the network signal condition; therefore, they will not operate simultaneously at any moment.
- For EN-DC mode, Qualcomm Smart Transmit algorithm in WWAN adds directly the time-averaged RF exposure from 4G(LTE) and time-averaged RF exposure from 5G NR. Smart Transmit algorithm controls the total RF exposure from both 4G and 5G NR to not exceed FCC limit. Therefore, simultaneous transmission compliance between 4G+5G NR operation is demonstrated in the Part 2 Report during algorithm validation. In Part 1 Report, simultaneous transmission compliance was evaluated individually with other Radios (WLAN or BT) using one of 4G or 5G NR.
- This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications.
- This device 5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WLAN Direct (GC/GO), and 5.3GHz / 5.5GHz supports WLAN Direct (GC only). WLAN6GHz has no hotspot function.
- The worst case 5 GHz WLAN SAR for each configuration was used for SAR summation.
- According to the EUT characteristic, WLAN 5GHz/6GHz and Bluetooth can transmit simultaneously.
- According to the EUT characteristic, WLAN 5GHz/6GHz and WLAN 2.4GHz can't transmit simultaneously.
- According to the EUT characteristic, WLAN 5GHz and WLAN 6GHz can't transmit simultaneously.
- According to the EUT characteristic, WLAN 2.4GHz and Bluetooth cannot transmit simultaneously.
- NFC can transmit simultaneously with other Radios in extremity exposure condition.
- For Headset SAR and non-Headset SAR always chose higher SAR to do co-located analysis.
- For distance SAR and non-distance SAR always chose higher SAR to do co-located analysis.
- For standalone WWAN, always choose the highest SAR among all WWAN bands within the selected antenna for head each exposure position to perform simultaneous transmission analysis with WLAN/BT. This is the worst co-located analysis and can represent each band.
- The maximum SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - 1g Scalar SAR summation < 1.6W/kg and 10g Scalar SAR summation < 4.0W/kg.
 - $SPLSR = (SAR1 + SAR2)^{1.5} / (\min. \text{ separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - If $SPLSR \leq 0.04$ for 1g SAR and $SPLSR \leq 0.10$ for 10g SAR, simultaneously transmission SAR measurement is not necessary.
 - Simultaneously transmission SAR measurement, and the reported multi-band 1g SAR < 1.6W/kg and 10g SAR < 4.0W/kg.

- v) The SPLSR calculated results please refer to section 18.6.
18. The WLAN6GHz Sim-Tx analysis guidance with other transmitters was based on SAR test results. The simultaneous transmission and test exemption analysis were compliant with KDB 447498 D01. For the device does not support FR2 or other MPE field measurement, therefore section 18 in the SAR report has no TER analysis according to KDB 987594 requirement.
 19. The simultaneous transmission analysis, considering WPT highest SAR is less than 0.0001 W/kg, the contribution of the reverse charging to the total TER can be neglected.

Conclusion:

1. The Spot check results showed that Deviation of the SAR results did not exceed 3dB, SAR data reuse is justified.
2. Simultaneous transmission analysis for all bands and all position are based on maximum SAR results chosen between the original filing and Spot check Verification Data

18.1 5G NR + LTE + WLAN + BT Sim-Tx analysis

In 5G NR + LTE + WLAN + BT simultaneous transmission, 5G NR and LTE transmission are managed and controlled by Qualcomm® Smart Transmit, while the RF exposure from WLAN and BT radios is managed using legacy approach, i.e., through a fixed power back-off if needed.

Since WLAN and BT do not employ time-averaging, 1gSAR and 10gSAR measurement for WLAN and BT need to be conducted at their corresponding rated power following current FCC test procedures to determine reported SAR values.

Smart Transmit current implementation assumes hotspots from 5G NR and LTE are collocated. Therefore, for a total of 100% exposure margin, if LTE uses x%, then the exposure margin left for 5G NR is capped to (100-x)%. Thus, the compliance equation for LTE + 5G NR is

$$x\% * A + (100-x)\% * B \leq 1.0,$$

Where, A is normalized reported time-averaged SAR exposure ratio from LTE, and $A \leq 1.0$; B is normalized reported time-averaged exposure ratio from 5G NR (i.e. SAR exposure for 5G FR1), and $B \leq 1.0$.

Let C = normalized reported SAR exposure ratio from WLAN+BT, then for compliance,

$$x\% * A + (100-x)\% * B + C \leq 1.0 \quad (1)$$

$$x\% * A + (100-x)\% * B \leq x\% * \max(A, B) + (100-x)\% * \max(A, B) \leq \max(A, B)$$

$$x\% * A + (100-x)\% * B + C \leq \max(A, B) + C \leq 1.0 \quad (2)$$

If $A + C \leq 1.0$ and $B + C \leq 1.0$ can be proven, then " $x\% * A + (100-x)\% * B + C \leq 1.0$ ". Therefore simultaneous transmission analysis for 5G NR + LTE + WLAN + BT can be performed in two steps

- Step 1: Prove total exposure ratio (TER) of LTE + WLAN + BT < 1
- Step 2: Prove total exposure ratio (TER) of 5G NR + WLAN + BT < 1

Else, if $A + C > 1.0$ and/or $B + C > 1.0$, then the followings need to hold true for compliance:

- i. A and C are decoupled based on the SPLSR criteria, and
- ii. $(100-x)\% * B + C \leq 1.0$, and
- iii. $x\% * A + (100-x)\% * B \leq 1.0$

Note iii. is covered in Part 2 report; i. and ii. should be addressed in Part 2 report.

Above analysis is also apply to LTE inter-band uplink, LTE1 + LTE2 + WLAN + BT simultaneous transmission, so inter-band uplink CA no need to do additional simultaneously analysis again. Only required comply with total exposure ratio (TER) of LTE + WLAN + BT < 1.

18.2 Sub6 Antenna Groups

The 2nd generation of Smart Transmit (GEN2) operates based on pre-defined sub6 antenna groups (AG). Sub6 Tx antennas in the device are grouped based on spatial variation of RF exposure distributions, where the RF exposure of one AG is mutually exclusive from other AG. This is accomplished by demonstrating below conditions for all exposure positions under each DSI for a given exposure category.

- (a) Case 1: Sum of SAR of one antenna from each of the sub6 AGs and the RF exposure from radios outside Smart Transmit is less than regulatory limits for each supported DSI. This condition must be demonstrated for all antenna combinations of sub6 AGs.
 - i. For a given DSI, obtain the highest *reported* SAR for each antenna out of all supported technologies and frequency bands. Obtain the maximum *reported* SAR for each AG by taking the maximum out of *reported* SAR for all antennas belonging to each AG.
 - ii. Demonstrate that the sum of maximum reported SAR (normalized to regulatory limit) from each of the sub6 AGs and the sum of reported SAR (normalized to regulatory limit) from all supported radios outside of Smart Transmit should be less than 1.0
- (b) Case 2: If the Case 1 is NOT met, then for a given antenna grouping scheme plus external radios/antennas (ERs) (referred to as 'configuration'), demonstrate all AG pairs, all ER pairs and all (AG, ER) pairs in the configuration meet SPLSR criteria (Section 4.3.2 (c) in FCC KDB 447498 D01 v06) for each exposure position under each supported DSI. For a given exposure position under a given DSI, prove all AG pairs, all ER pairs and all (AG, ER) pairs (if there are external radios outside Smart Transmit) in the configuration meet SPLSR.

This device supports two sub6 AG: AG0 and AG1, the detailed please refer to the below table:

Antenna Group 0 (AG0)	ANT1 & ANT4 & ANT5 & ANT7 & ANT10
Antenna Group 1 (AG1)	ANT0 & ANT2 & ANT8

The conditions are verified through the following criterias:

- i) (SAR1 + SAR2 criteria): If SPLSR criteria is not used, then the highest reported SAR at *Plimit* for each antenna should be obtained out of all supported technologies and frequency bands for each DSI. Demonstrate that the sum of reported SAR of one antenna from each of the sub6 AGs and the sum of RF exposure from all supported radios outside of Smart Transmit should be less than the regulatory limit as given below for each DSI.
 - 1. Obtain the worst-case reported SAR for each antenna group (i.e., maximum *reported* SAR at *Plimit* out of all supported technologies, frequency bands and antennas in AG0 and AG1), denoted as max.SAR.AG0 and max.SAR.AG1, and obtain the worst-case RF exposure for each external radio, and demonstrate that the sum of these RF exposures meets: { [max.SAR.AG0+ max.SAR.AG1] + WIFI/BT worst-case reported SAR} ≤ 1.6 (for 1g, or 4.0 for 10g). (WIFI/BT worst-case reported SAR is the worst SAR in all combinations of WIFI and BT simultaneous transmission)
- ii) (SPLSR criteria): For each antenna, obtain the highest reported SAR value at *Plimit* out of all supported technologies for each frequency band. Using these values, demonstrate for a given DSI that every antenna from one sub6 AG meets SPLSR criteria with every antenna in another sub6 AG for all frequency bands. This criteria must be demonstrated for all antenna pair combinations irrespective of supported simultaneous transmission scenarios as given below for each DSI:
 - a. SPLSR criteria should be met for all antenna pair combinations of AG0 and AG1. As it can be seen, these include all combinations of antenna groups, antennas, and frequency bands.
 - b. Obtain combined SAR per AG: Obtain the worst-case conservative combined SAR and its peak location for each AG.
 - c. Use the 'closest' peak location out of all antennas of AGj to evaluate SPLSR with other AGs in the configuration. Note, by 'closest', select the peak location out of all antennas (ε AGj) that is closest to the peak location of other AG where SPLSR is evaluated.
- iii) (combination of SPLSR & SAR1+SAR2 criteria): If SPLSR criteria for all the combinations of sub6 antenna groups in (i) is demonstrated to show that each AG is mutually exclusive from other AGs, and if the WIFI/BT antennas supported outside of Smart Transmit do not meet SPLSR criteria, then the condition in (ii) reduces to: {max.SAR.AG0 + worst-case reported SAR} ≤ 1.6 and {max.SAR.AG1+ worst-case reported SAR } ≤ 1.6 for compliance demonstration (for 1g, or 4.0 for 10g).

For summed SAR results and SPLSR detailed analysis, please refer to section 18.3 / 18.4 / 18.5 / 18.6 /18.7 of this report. All of the combinations of sub6 antenna groups are sufficient to show that AG0 is mutually exclusive from AG1 and that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06 and IEEE 1528- 2013 Section 6.3.4.1.



Conclusion:

3. The Spot check results showed that Deviation of the SAR results did not exceed 3dB, SAR data reuse is justified.
4. Simultaneous transmission analysis for all bands and all position are based on maximum SAR results chosen between the original filing and Spot check Verification Data

18.3 Head Exposure Conditions

General Note: The unit of SAR evaluation is W/kg.

Simultaneous Transmission Evaluation of WWAN+WLAN+BT:

<AG0 maximum report SAR>:

Test Position	Ant1	Ant4	Ant5	Ant7	Ant10	MAX
	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
Right Cheek	0.885	0.489	0.326	0.888	0.495	0.888
Right Tilted	0.897	0.534	0.323	0.290	0.166	0.897
Left Cheek	0.569	0.843	0.854	0.402	0.891	0.891
Left Tilted	0.626	0.845	0.644	0.115	0.086	0.845

<AG1 maximum report SAR>:

Test Position	Ant0	Ant2	Ant8	MAX
	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
Right Cheek	0.163	0.178	0.264	0.264
Right Tilted	0.161	0.106	0.106	0.161
Left Cheek	0.296	0.157	0.205	0.296
Left Tilted	0.117	0.091	0.156	0.156

<WLAN+BT Worse-case SAR>:

NO	1	2	3	4	5	2+3	2+4	3+5	4+5	Wlan+BT worse case
Test Position	WLAN2.4GHz Ant 3+6	WLAN5GHz Ant 4+5	Bluetooth Ant 3	Bluetooth Ant 6	WLAN6GHz Ant 4+5	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)
Right Cheek	0.236	0.185	0.166	0.057	0.154	0.351	0.242	0.320	0.211	0.351
Right Tilted	0.256	0.194	0.197	0.016	0.174	0.391	0.210	0.371	0.190	0.391
Left Cheek	0.378	0.364	0.280	0.095	0.389	0.644	0.459	0.669	0.484	0.669
Left Tilted	0.330	0.286	0.244	0.029	0.337	0.530	0.315	0.581	0.366	0.581

<Simultaneous Transmission analysis of AG0 + AG1 + WLAN+BT Worse-case>:

Test Position	AG0	AG1	Wlan/BT worst case	AG0+AG1+wlan +BT worse case
	1g SAR (W/kg)	1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)
Right Cheek	0.888	0.264	0.351	1.50
Right Tilted	0.897	0.161	0.391	1.45
Left Cheek	0.891	0.296	0.669	1.86
Left Tilted	0.845	0.156	0.581	1.58

Note: The results marked yellow in above table refers to the detailed analysis corresponding to each position below tables.



Left Cheek					
Ant combination	AG1	AG0	Wlan+BT worst case	AG0+AG1+wlan +BT worst case	Note
	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	
Ant0-Ant1	0.296	0.569	0.669	1.53	-
Ant0-Ant4	0.296	0.843	0.669	1.81	Case 1
Ant0-Ant5	0.296	0.854	0.669	1.82	Case 2
Ant0-Ant7	0.296	0.402	0.669	1.37	-
Ant0-Ant10	0.296	0.891	0.669	1.86	Case 3
Ant2-Ant1	0.157	0.569	0.669	1.40	-
Ant2-Ant4	0.157	0.843	0.669	1.67	Case 4
Ant2-Ant5	0.157	0.854	0.669	1.68	Case 5
Ant2-Ant7	0.157	0.402	0.669	1.23	-
Ant2-Ant10	0.157	0.891	0.669	1.72	Case 6
Ant8-Ant1	0.205	0.569	0.669	1.44	-
Ant8-Ant4	0.205	0.843	0.669	1.72	Case 7
Ant8-Ant5	0.205	0.854	0.669	1.73	Case 8
Ant8-Ant7	0.205	0.402	0.669	1.28	-
Ant8-Ant10	0.205	0.891	0.669	1.77	Case 9

<Simultaneous Transmission analysis of WLAN/BT only without WWAN>:

NO	1	2	3	4	1+2	1+3	2+4	3+4
Test Position	WLAN5GHz Ant 4+5	Bluetooth Ant 3	Bluetooth Ant 6	WLAN6GHz Ant 4+5				
	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)
Right Cheek	0.622	0.289	0.097	0.154	0.91	0.72	0.44	0.25
Right Tilted	0.589	0.343	0.027	0.174	0.93	0.62	0.52	0.20
Left Cheek	1.106	0.487	0.160	0.389	1.59	1.27	0.88	0.55
Left Tilted	0.919	0.424	0.050	0.337	1.34	0.97	0.76	0.39

18.4 Hotspot Exposure Conditions

General Note: The unit of SAR evaluation is W/kg.
Simultaneous Transmission Evaluation of WWAN+WLAN+BT:
<AG0 maximum report SAR>:

Test Position	Ant1	Ant4	Ant5	Ant7	Ant10	MAX
	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
Front	0.418	0.134	0.093	0.327	0.262	0.418
Back	0.631	0.615	0.526	0.457	0.351	0.631
Left Side	0.621	0.008	0.007	0.629	0.625	0.629
Right Side	0.122	0.125	0.629	0.012	0.015	0.629
Top Side	0.634	0.263	0.094	0.065	0.035	0.634
Bottom Side						

<AG1 maximum report SAR>:

Test Position	Ant0	Ant2	Ant8	MAX
	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
Front	0.910	1.195	0.521	1.195
Back	1.267	0.882	0.618	1.267
Left Side	0.870	0.441	0.098	0.870
Right Side	0.150	0.774	1.274	1.274
Top Side				
Bottom Side	1.302	1.289	0.480	1.302

<WLAN+BT Worse-case SAR>:

NO	1	2	3	4	2+3	2+4	Wlan+BT worse case
	WLAN2.4GHz Ant 3+6	WLAN5GHz Ant 4+5	Bluetooth Ant 3	Bluetooth Ant 6			
	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
Front	0.301	0.532	0.196	0.086	0.728	0.618	0.728
Back	0.425	0.638	0.210	0.159	0.848	0.797	0.848
Left Side	0.050	0.047	0.028	0.013	0.075	0.060	0.075
Right Side	0.130	0.228	0.066	0.285	0.294	0.513	0.513
Top Side	0.601	0.363	0.282	0.027	0.645	0.390	0.645
Bottom Side							

<Simultaneous Transmission analysis of AG0 + AG1 + WLAN+BT Worse-case>:

Test Position	AG0	AG1	Wlan+BT worst case	AG0+AG1+Wlan +BT worse case
	1g SAR (W/kg)	1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)
Front	0.418	1.195	0.728	2.34
Back	0.631	1.267	0.848	2.75
Left Side	0.629	0.870	0.075	1.57
Right Side	0.629	1.274	0.513	2.42
Top Side	0.634		0.645	1.28
Bottom Side		1.302		1.30

Note: The results marked yellow in above table refers to the detailed analysis corresponding to each position below tables.



Front					
Ant combination	AG1	AG0	Wlan+BT worst case	AG0+AG1+wlan +BT worse case	Note
	1g SAR (W/kg)	1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	
Ant0-Ant1	0.910	0.418	0.728	2.06	Case 1
Ant0-Ant4	0.910	0.134	0.728	1.77	Case 2
Ant0-Ant5	0.910	0.093	0.728	1.73	Case 3
Ant0-Ant7	0.910	0.327	0.728	1.97	Case 4
Ant0-Ant10	0.910	0.262	0.728	1.90	Case 5
Ant2-Ant1	1.195	0.418	0.728	2.34	Case 6
Ant2-Ant4	1.195	0.134	0.728	2.06	Case 7
Ant2-Ant5	1.195	0.093	0.728	2.02	Case 8
Ant2-Ant7	1.195	0.327	0.728	2.25	Case 9
Ant2-Ant10	1.195	0.262	0.728	2.19	Case 10
Ant8-Ant1	0.521	0.418	0.728	1.67	Case 11
Ant8-Ant4	0.521	0.134	0.728	1.38	-
Ant8-Ant5	0.521	0.093	0.728	1.34	-
Ant8-Ant7	0.521	0.327	0.728	1.58	-
Ant8-Ant10	0.521	0.262	0.728	1.51	-

Back					
Ant combination	AG1	AG0	Wlan+BT worst case	AG0+AG1+wlan +BT worse case	Note
	1g SAR (W/kg)	1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	
Ant0-Ant1	1.267	0.631	0.848	2.75	Case 12
Ant0-Ant4	1.267	0.615	0.848	2.73	Case 13
Ant0-Ant5	1.267	0.526	0.848	2.64	Case 14
Ant0-Ant7	1.267	0.485	0.848	2.60	Case 15
Ant0-Ant10	1.267	0.351	0.848	2.47	Case 16
Ant2-Ant1	0.882	0.631	0.848	2.36	Case 17
Ant2-Ant4	0.882	0.615	0.848	2.35	Case 18
Ant2-Ant5	0.882	0.526	0.848	2.26	Case 19
Ant2-Ant7	0.882	0.485	0.848	2.22	Case 20
Ant2-Ant10	0.882	0.351	0.848	2.08	Case 21
Ant8-Ant1	0.618	0.631	0.848	2.10	Case 22
Ant8-Ant4	0.618	0.615	0.848	2.08	Case 23
Ant8-Ant5	0.618	0.526	0.848	1.99	Case 24
Ant8-Ant7	0.618	0.485	0.848	1.95	Case 25
Ant8-Ant10	0.618	0.351	0.848	1.82	Case 26

Right side					
Ant combination	AG1	AG0	Wlan+BT worst case	AG0+AG1+wlan +BT worse case	Note
	1g SAR (W/kg)	1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	
Ant0-Ant1	0.150	0.122	0.513	0.79	-
Ant0-Ant4	0.150	0.125	0.513	0.79	-
Ant0-Ant5	0.150	0.629	0.513	1.29	-
Ant0-Ant7	0.150	0.012	0.513	0.68	-
Ant0-Ant10	0.150	0.015	0.513	0.68	-
Ant2-Ant1	0.774	0.122	0.513	1.41	-
Ant2-Ant4	0.774	0.125	0.513	1.41	-
Ant2-Ant5	0.774	0.629	0.513	1.92	Case 27
Ant2-Ant7	0.774	0.012	0.513	1.30	-
Ant2-Ant10	0.774	0.015	0.513	1.30	-
Ant8-Ant1	1.274	0.122	0.513	1.91	Case 28



Ant8-Ant4	1.274	0.125	0.513	1.91	Case 29
Ant8-Ant5	1.274	0.629	0.513	2.42	Case 30
Ant8-Ant7	1.274	0.012	0.513	1.80	Case 31
Ant8-Ant10	1.274	0.015	0.513	1.80	Case 32

<Simultaneous Transmission analysis of WLAN/BT only without WWAN>:

NO	1	2	3		
Test Position	WLAN5GHz Ant 4+5	Bluetooth Ant 3	Bluetooth Ant 6	1+2	1+3
	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)
Front	0.532	0.196	0.086	0.73	0.62
Back	0.638	0.210	0.159	0.85	0.80
Left Side	0.047	0.028	0.013	0.08	0.06
Right Side	0.228	0.066	0.285	0.29	0.51
Top Side	0.363	0.282	0.027	0.65	0.39
Bottom Side				0.00	0.00

18.5 Body-Worn Accessory Exposure Conditions

General Note: The unit of SAR evaluation is W/kg.
Simultaneous Transmission Evaluation of WWAN+WLAN+BT:

<AG0 maximum report SAR>:

Test Position	Ant1	Ant4	Ant5	Ant7	Ant10	MAX
	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
Front	0.875	0.192	0.569	0.602	0.578	0.875
Back	0.895	0.882	0.877	0.875	0.787	0.895

<AG1 maximum report SAR>:

Test Position	Ant0	Ant2	Ant8	MAX
	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
Front	1.166	1.299	0.537	1.299
Back	1.304	1.281	0.544	1.304

<WLAN+BT Worse-case SAR>:

NO	1	2	3	4	5	2+3	2+4	3+5	4+5	Wlan+BT worse case
	WLAN2.4GHz Ant 3+6	WLAN5GHz Ant 4+5	Bluetooth Ant 3	Bluetooth Ant 6	WLAN6GHz Ant 4+5					
Test Position	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)
Front	0.248	0.275	0.257	0.155	0.172	0.532	0.430	0.429	0.327	0.532
Back	0.374	0.389	0.275	0.288	0.066	0.664	0.677	0.341	0.354	0.677

<Simultaneous Transmission analysis of AG0 + AG1 + WLAN+BT Worse-case>:

Test Position	AG0	AG1	Wlan+BT worst case	AG0+AG1+wlan +BT worse case
	1g SAR (W/kg)	1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)
Front	0.875	1.299	0.532	2.71
Back	0.895	1.304	0.677	2.88

Note: The results marked yellow in above table refers to the detailed analysis corresponding to each position below tables.



Front					
Ant combination	AG1	AG0	Wlan+BT worst case	AG0+AG1+wlan +BT worst case	Note
	1g SAR (W/kg)	1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	
Ant0-Ant1	1.166	0.875	0.532	2.57	Case 1
Ant0-Ant4	1.166	0.192	0.532	1.89	Case 2
Ant0-Ant5	1.166	0.569	0.532	2.27	Case 3
Ant0-Ant7	1.166	0.602	0.532	2.30	Case 4
Ant0-Ant10	1.166	0.578	0.532	2.28	Case 5
Ant2-Ant1	1.299	0.875	0.532	2.71	Case 6
Ant2-Ant4	1.299	0.192	0.532	2.02	Case 7
Ant2-Ant5	1.299	0.569	0.532	2.40	Case 8
Ant2-Ant7	1.299	0.602	0.532	2.43	Case 9
Ant2-Ant10	1.299	0.578	0.532	2.41	Case 10
Ant8-Ant1	0.537	0.875	0.532	1.94	Case 11
Ant8-Ant4	0.537	0.192	0.532	1.26	-
Ant8-Ant5	0.537	0.569	0.532	1.64	Case 27
Ant8-Ant7	0.537	0.602	0.532	1.67	Case 28
Ant8-Ant10	0.537	0.578	0.532	1.65	Case 29

Back					
Ant combination	AG1	AG0	Wlan+BT worst case	AG0+AG1+wlan +BT worst case	Note
	1g SAR (W/kg)	1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	
Ant0-Ant1	1.304	0.895	0.677	2.88	Case 12
Ant0-Ant4	1.304	0.882	0.677	2.86	Case 13
Ant0-Ant5	1.304	0.877	0.677	2.86	Case 14
Ant0-Ant7	1.304	0.875	0.677	2.86	Case 15
Ant0-Ant10	1.304	0.787	0.677	2.77	Case 16
Ant2-Ant1	1.286	0.895	0.677	2.86	Case 17
Ant2-Ant4	1.286	0.882	0.677	2.85	Case 18
Ant2-Ant5	1.286	0.877	0.677	2.84	Case 19
Ant2-Ant7	1.286	0.875	0.677	2.84	Case 20
Ant2-Ant10	1.286	0.787	0.677	2.75	Case 21
Ant8-Ant1	0.544	0.895	0.677	2.12	Case 22
Ant8-Ant4	0.544	0.882	0.677	2.10	Case 23
Ant8-Ant5	0.544	0.877	0.677	2.10	Case 24
Ant8-Ant7	0.544	0.875	0.677	2.10	Case 25
Ant8-Ant10	0.544	0.787	0.677	2.01	Case 26

<Simultaneous Transmission analysis of WLAN/BT only without WWAN>

NO	1	2	3	4	1+2	1+3	2+4	3+4	Wlan+BT worst case
Test Position	WLAN5GHz Ant 4+5	Bluetooth Ant 3	Bluetooth Ant 6	WLAN6GHz Ant 4+5	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)
	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)
Front	0.844	0.257	0.155	0.172	1.10	1.00	0.43	0.33	1.10
Back	1.190	0.275	0.288	0.066	1.47	1.48	0.34	0.35	1.48

18.6 Product specific 10g SAR Exposure Conditions

Remark:

- For Bluetooth Product specific 10g stand-alone SAR is not required for a transmitter or antenna, due to 1g hotspot SAR is <1.2W/kg.

General Note: The unit of SAR evaluation is W/kg.

Simultaneous Transmission Evaluation of WWAN+WLAN+BT+NFC:

<AG0 maximum report SAR>:

Test Position	Ant1	Ant4	Ant5	Ant7	Ant10	MAX
	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)
Front	2.358					2.358
Back	2.464	2.081	0.905	1.821		2.464
Left Side	1.850			2.428	2.483	2.483
Right Side			2.471			2.471
Top Side	2.491					2.491
Bottom Side						

<AG1 maximum report SAR>:

Test Position	Ant0	Ant2	Ant8	MAX
	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)
Front	1.493	3.138		3.138
Back	1.909	2.153		2.153
Left Side				
Right Side			3.186	3.186
Top Side				
Bottom Side	3.198	3.207		3.207

<WLAN+NFC Worse-case SAR>:

NO	1	2	3	4	1+4	2+4	3+4	Wlan+NFC worse case
Test Position	WLAN2.4GHz Ant 3+6	WLAN5GHz Ant 4+5	WLAN6GHz Ant 4+5	NFC				10g SAR (W/kg)
	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	Summed 10g SAR (W/kg)	Summed 10g SAR (W/kg)	Summed 10g SAR (W/kg)	10g SAR (W/kg)
Front		0.873	0.125	0.003	0.003	0.876	0.128	0.876
Back		0.655	0.078	0.019	0.019	0.674	0.097	0.674
Left Side			0.002	0.001	0.001	0.001	0.003	0.003
Right Side		0.559	0.104	0.002	0.002	0.561	0.106	0.561
Top Side	0.949	0.640	0.114	0.002	0.951	0.642	0.116	0.951
Bottom Side				0.001	0.001	0.001	0.001	0.001



<Simultaneous Transmission analysis of AG0 + AG1 + WLAN +NFC Worse-case >:

Test Position	AG0	AG1	Wlan+NFC worse case	AG0+AG1+wlan+NFC worse case
	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	Summed 10g SAR (W/kg)
Front	2.358	3.138	0.876	6.37
Back	2.464	2.153	0.674	5.29
Left Side	2.483		0.003	2.49
Right Side	2.471	3.186	0.561	6.22
Top Side	2.491		0.951	3.44
Bottom Side		3.207	0.001	3.21

Note: The results marked yellow in above table refers to the detailed analysis corresponding to each position below tables.

Front					
Ant combination	AG1	AG0	Wlan+NFC worse case	AG0+AG1+wlan+NFC worse case	Note
	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	Summed 10g SAR (W/kg)	
Ant0-Ant1	1.493	2.358	0.876	4.73	Case 1
Ant0-Ant4	1.493		0.876	2.37	-
Ant0-Ant5	1.493		0.876	2.37	-
Ant0-Ant7	1.493		0.876	2.37	-
Ant0-Ant10	1.493		0.876	2.37	-
Ant2-Ant1	3.138	2.358	0.876	6.37	Case 2
Ant2-Ant4	3.138		0.876	4.01	Case 3
Ant2-Ant5	3.138		0.876	4.01	Case 4
Ant2-Ant7	3.138		0.876	4.01	Case 5
Ant2-Ant10	3.138		0.876	4.01	Case 6
Ant8-Ant1		2.358	0.876	3.23	-
Ant8-Ant4			0.876	0.88	-
Ant8-Ant5			0.876	0.88	-
Ant8-Ant7			0.876	0.88	-
Ant8-Ant10			0.876	0.88	-
Back					
Ant combination	AG1	AG0	Wlan+NFC worse case	AG0+AG1+wlan+NFC worse case	Note
	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	Summed 10g SAR (W/kg)	
Ant0-Ant1	1.909	2.464	0.674	5.05	Case 7
Ant0-Ant4	1.909	2.081	0.674	4.66	Case 8
Ant0-Ant5	1.909	0.905	0.674	3.49	-
Ant0-Ant7	1.909	1.821	0.674	4.40	Case 9
Ant0-Ant10	1.909		0.674	2.58	-
Ant2-Ant1	2.153	2.464	0.674	5.29	Case 10
Ant2-Ant4	2.153	2.081	0.674	4.91	Case 11
Ant2-Ant5	2.153	0.905	0.674	3.73	-
Ant2-Ant7	2.153	1.821	0.674	4.65	Case 12
Ant2-Ant10	2.153		0.674	2.83	-
Ant8-Ant1		2.464	0.674	3.14	-
Ant8-Ant4		2.081	0.674	2.76	-
Ant8-Ant5		0.905	0.674	1.58	-
Ant8-Ant7		1.821	0.674	2.50	-
Ant8-Ant10			0.674	0.67	-

Right side					
Ant combination	AG1	AG0	Wlan+NFC worse case	AG0+AG1+wlan+NFC worse case	Note
	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	Summed 10g SAR (W/kg)	
Ant0-Ant1			0.560	0.56	-
Ant0-Ant4			0.560	0.56	-
Ant0-Ant5		2.471	0.560	3.03	-
Ant0-Ant7			0.560	0.56	-
Ant0-Ant10			0.560	0.56	-
Ant2-Ant1			0.560	0.56	-
Ant2-Ant4			0.560	0.56	-
Ant2-Ant5		2.471	0.560	3.03	-
Ant2-Ant7			0.560	0.56	-
Ant2-Ant10			0.560	0.56	-
Ant8-Ant1	3.186		0.560	3.75	-
Ant8-Ant4	3.186		0.560	3.75	-
Ant8-Ant5	3.186	2.471	0.560	6.22	Case 13
Ant8-Ant7	3.186		0.560	3.75	-
Ant8-Ant10	3.186		0.560	3.75	-


<Simultaneous Transmission analysis of WLAN +NFC only without WWAN>:

NO	2	3	4	2+4	3+4
Test Position	WLAN5GHz Ant 4+5	WLAN6GHz Ant 4+5	NFC	Summed 10g SAR (W/kg)	Summed 10g SAR (W/kg)
	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)		
Front	3.151	0.125	0.002	3.15	0.13
Back	2.359	0.078	0.020	2.38	0.10
Left Side		0.002	0.001	0.00	0.00
Right Side	1.755	0.104	0.001	1.76	0.11
Top Side	2.282	0.114	0.001	2.28	0.12
Bottom Side			0.001	0.00	0.00


18.7 SPLSR Evaluation and Analysis

General Note:


1. When standalone SAR is measured for both antennas in the pair, the peak location separation distance is computed by the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates in the area scans or extrapolated peak SAR locations in the zoom scans, as appropriate.
2. $SPLSR = (SAR1 + SAR2)1.5 / (\text{min. separation distance, mm})$. If $SPLSR \leq 0.04$ for 1g SAR and $SPLSR \leq 0.10$ for 10g SAR, simultaneously transmission SAR measurement is not necessary.
3. Per April 2022 TCB Workshop Notes, AG0 was summed algebraically with the BT/WIFI Antenna 3/4/5/6 and NFC antenna for the purposes of hybrid SPLSR combination and they are located at the Top of the device.
4. Per April 2022 TCB Workshop, instead of doing a small volume scan over a co-located antenna pair, used summing the SAR values of the co-located pair and using that value in SPLSR calculation. In the calculation used the minimum distance between the spatially separated antenna and the closest antenna of the co-located antenna pair to be conservative.
5. The axis peak locations refer to Section 17.8.

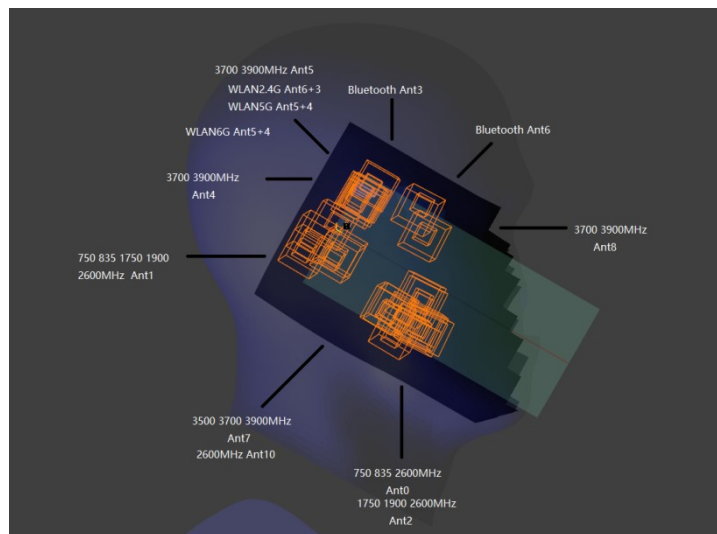


Head WWAN+WLAN+BT Left Cheek 0mm

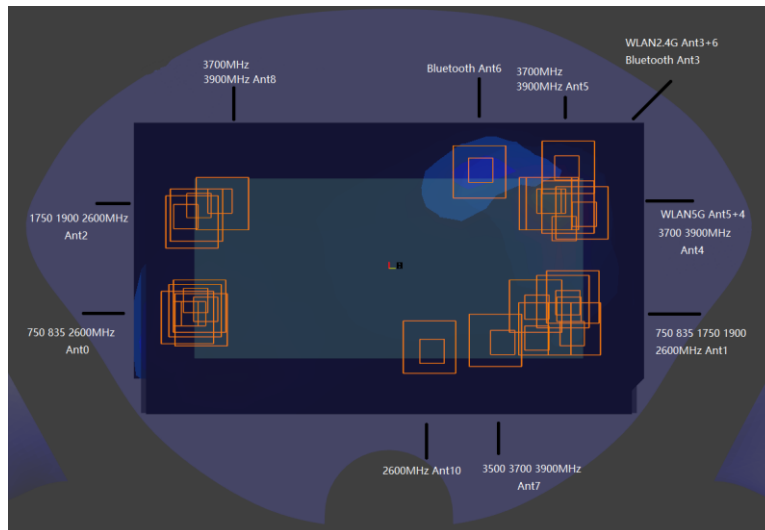


Hotspot WWAN+WLAN+BT Back 5mm

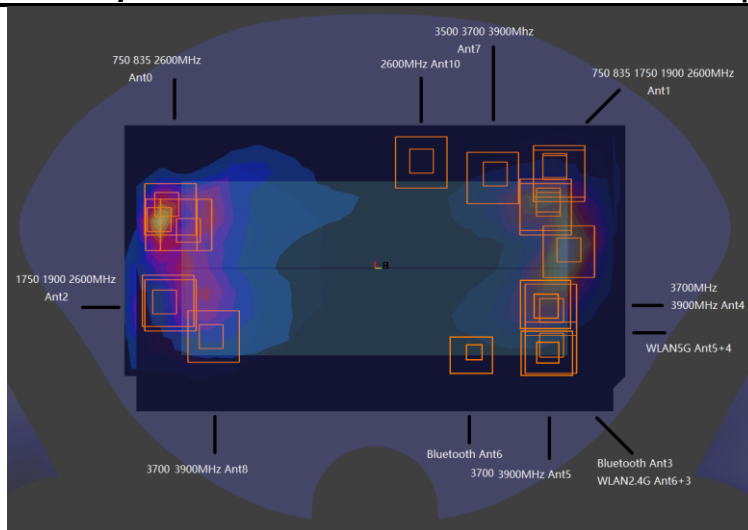


Hotspot WWAN+WLAN+BT Front 5mm

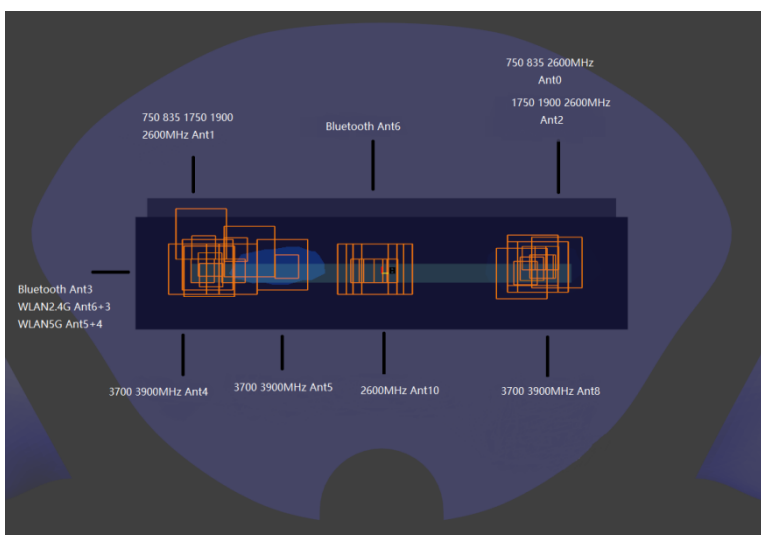


Hotspot WWAN+WLAN+BT Right Side 5mm

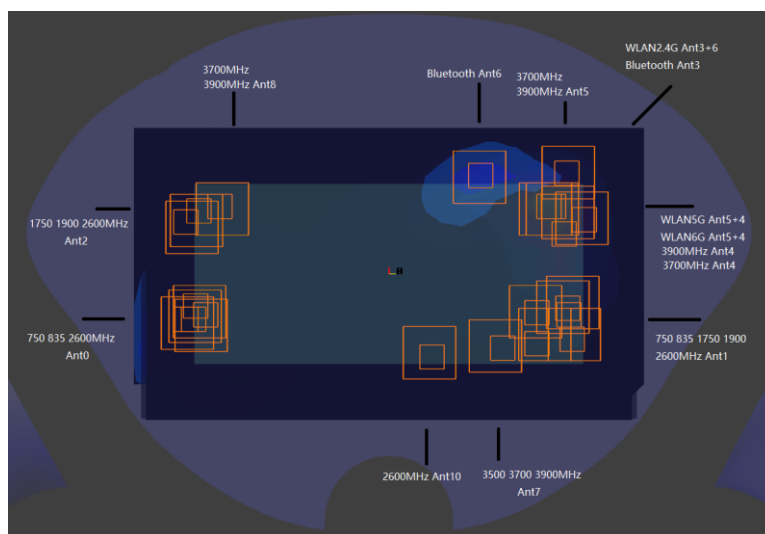


Body-worn WWAN+WLAN+BT Back 5mm

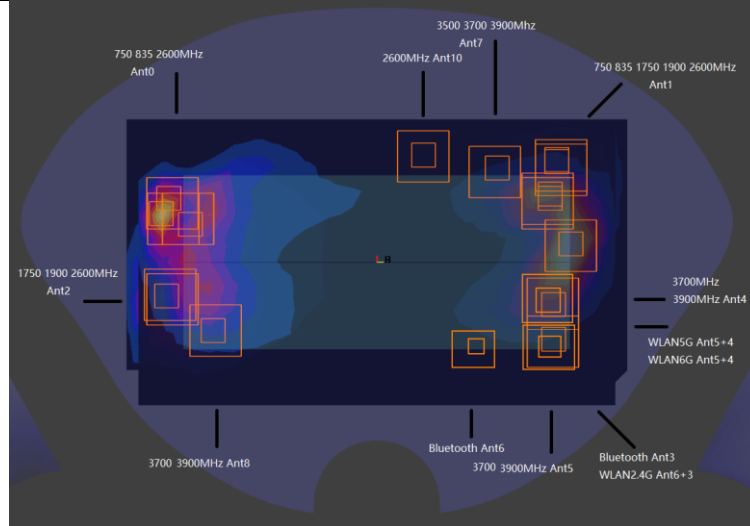


Body-worn WWAN+WLAN+BT Front 5mm

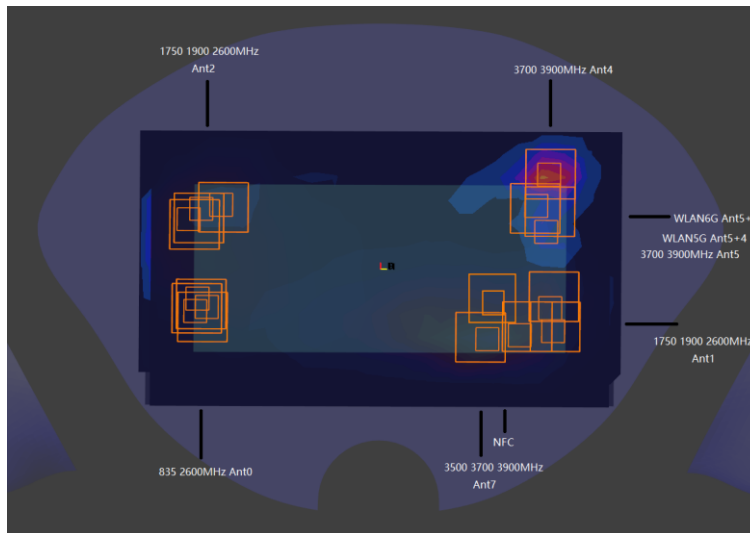

Extremity WWAN+WLAN+NFC Back 0mm

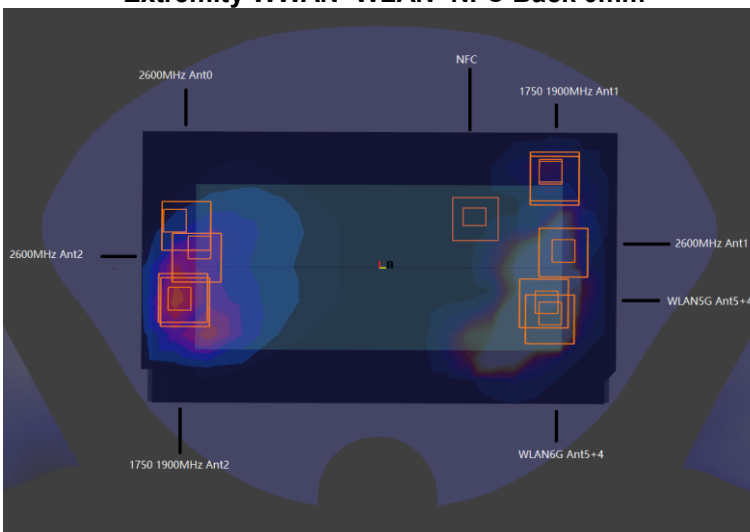

Extremity WWAN+WLAN+NFC Front 0mm

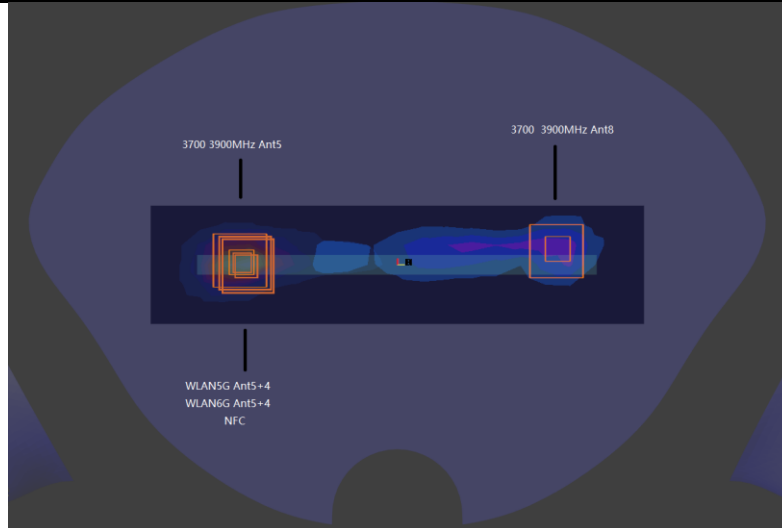

Extremity WWAN+WLAN+NFC Right Side 0mm

<Head>

Case No	Band	Position	SAR (W/kg)		Gap	SAR (W/kg) peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					(mm)	X	Y	Z				
Case 1	AG1-Ant0	Left Cheek	0.296	0.30	0mm	56.6	217.5	-172.4	106.6	1.81	0.02	Not required
	AG0-Ant4		0.843	1.51	0mm	56.4	324.1	-173.7				
	WLAN		0.669		0mm							
Case 2	AG1-Ant0	Left Cheek	0.296	0.30	0mm	56.6	217.5	-172.4	106.6	1.82	0.02	Not required
	AG0-Ant5		0.854	1.52	0mm	56.4	324.1	-173.7				
	WLAN		0.669		0mm							
Case 3	AG1-Ant0	Left Cheek	0.296	0.30	0mm	56.6	217.5	-172.4	79.1	1.86	0.03	Not required
	AG0-Ant10		0.891	1.56	0mm	39	294.6	-173				
	WLAN		0.669		0mm							
Case 4	AG1-Ant2	Left Cheek	0.157	0.16	0mm	55.2	211.2	-170	113.0	1.67	0.02	Not required
	AG0-Ant4		0.843	1.51	0mm	56.4	324.1	-173.7				
	WLAN		0.669		0mm							
Case 5	AG1-Ant2	Left Cheek	0.157	0.16	0mm	55.2	211.2	-170	113.0	1.68	0.02	Not required
	AG0-Ant5		0.854	1.52	0mm	56.4	324.1	-173.7				
	WLAN		0.669		0mm							
Case 6	AG1-Ant2	Left Cheek	0.157	0.16	0mm	55.2	211.2	-170	85.0	1.72	0.03	Not required
	AG0-Ant10		0.891	1.56	0mm	39	294.6	-173				
	WLAN		0.669		0mm							
Case 7	AG1-Ant8	Left Cheek	0.205	0.21	0mm	56.2	210.5	-172	113.6	1.72	0.02	Not required
	AG0-Ant4		0.843	1.51	0mm	56.4	324.1	-173.7				
	WLAN		0.669		0mm							
Case 8	AG1-Ant8	Left Cheek	0.205	0.21	0mm	56.2	210.5	-172	113.6	1.73	0.02	Not required
	AG0-Ant5		0.854	1.52	0mm	56.4	324.1	-173.7				
	WLAN		0.669		0mm							
Case 9	AG1-Ant8	Left Cheek	0.205	0.21	0mm	56.2	210.5	-172	85.8	1.77	0.03	Not required
	AG0-Ant10		0.891	1.56	0mm	39	294.6	-173				
	WLAN		0.669		0mm							



<Hotspot>

Case No	Band	Position	SAR (W/kg)		Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
						X	Y	Z				
Case 1	AG1-Ant0	Front	0.910	0.91	5mm	-41.1	-76	-204	149.0	2.06	0.02	Not required
	AG0-Ant1		0.418	1.15	5mm	-52.8	72.5	-204				
	WLAN		0.728	5mm								
Case 2	AG1-Ant0	Front	0.910	0.91	5mm	-41.1	-76	-204	119.9	1.77	0.02	Not required
	AG0-Ant4		0.134	0.86	5mm	-19.8	42	-207				
	WLAN		0.728	5mm								
Case 3	AG1-Ant0	Front	0.910	0.91	5mm	-41.1	-76	-204	119.9	1.73	0.02	Not required
	AG0-Ant5		0.093	0.82	5mm	-19.8	42	-207				
	WLAN		0.728	5mm								
Case 4	AG1-Ant0	Front	0.910	0.91	5mm	-41.1	-76	-204	119.9	1.97	0.02	Not required
	AG0-Ant7		0.327	1.06	5mm	-19.8	42	-207				
	WLAN		0.728	5mm								
Case 5	AG1-Ant0	Front	0.910	0.91	5mm	-41.1	-76	-204	100.7	1.90	0.03	Not required
	AG0-Ant10		0.262	0.99	5mm	-72.2	19.8	-204				
	WLAN		0.728	5mm								
Case 6	AG1-Ant2	Front	1.195	1.20	5mm	-33.3	-79.5	-204	122.3	2.34	0.03	Not required
	AG0-Ant1		0.418	1.15	5mm	-19.8	42	-207				
	WLAN		0.728	5mm								
Case 7	AG1-Ant2	Front	1.195	1.20	5mm	-33.3	-79.5	-204	122.3	2.06	0.02	Not required
	AG0-Ant4		0.134	0.86	5mm	-19.8	42	-207				
	WLAN		0.728	5mm								
Case 8	AG1-Ant2	Front	1.195	1.20	5mm	-33.3	-79.5	-204	122.3	2.02	0.02	Not required
	AG0-Ant5		0.093	0.82	5mm	-19.8	42	-207				
	WLAN		0.728	5mm								
Case 9	AG1-Ant2	Front	1.195	1.20	5mm	-33.3	-79.5	-204	122.3	2.25	0.03	Not required
	AG0-Ant7		0.327	1.06	5mm	-19.8	42	-207				
	WLAN		0.728	5mm								
Case 10	AG1-Ant2	Front	1.195	1.20	5mm	-33.3	-79.5	-204	106.6	2.19	0.03	Not required
	AG0-Ant10		0.262	0.99	5mm	-72.2	19.8	-204				
	WLAN		0.728	5mm								
Case 11	AG1-Ant8	Front	0.521	0.52	5mm	4	-69	-204	113.6	1.67	0.02	Not required
	AG0-Ant1		0.418	1.15	5mm	-19.8	42	-207				
	WLAN		0.728	5mm								

Case No	Band	Position	SAR (W/kg)		Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
						X	Y	Z				
Case 12	AG1-Ant0	Back	1.267	1.27	5mm	-7	-80.5	-207	131.3	2.75	0.03	Not required
	AG0-Ant1		0.631	1.48	5mm	-65.5	37	-207				
	WLAN		0.848	5mm								
Case 13	AG1-Ant0	Back	1.267	1.27	5mm	-7	-80.5	-207	131.3	2.73	0.03	Not required
	AG0-Ant4		0.615	1.46	5mm	-65.5	37	-207				
	WLAN		0.848	5mm								
Case 14	AG1-Ant0	Back	1.267	1.27	5mm	-7	-80.5	-207	131.3	2.64	0.03	Not required
	AG0-Ant5		0.526	1.37	5mm	-65.5	37	-207				
	WLAN		0.848	5mm								
Case 15	AG1-Ant0	Back	1.267	1.27	5mm	-7	-80.5	-207	131.3	2.60	0.03	Not required



	AG0-Ant7		0.485	1.33	5mm	-65.5	37	-207				
	WLAN		0.848		5mm							
Case 16	AG1-Ant0	Back	1.267	1.27	5mm	14.3	-73.2	-207	119.7	2.47	0.03	Not required
	AG0-Ant10		0.351		5mm	14	46.5	-207				
	WLAN		0.848		5mm							
Case 17	AG1-Ant2	Back	0.882	0.88	5mm	-51.6	-95	-204	132.8	2.36	0.03	Not required
	AG0-Ant1		0.631		5mm	-65.5	37	-207				
	WLAN		0.848		5mm							
Case 18	AG1-Ant2	Back	0.882	0.88	5mm	-51.6	-95	-204	132.8	2.35	0.03	Not required
	AG0-Ant4		0.615		5mm	-65.5	37	-207				
	WLAN		0.848		5mm							
Case 19	AG1-Ant2	Back	0.882	0.88	5mm	-51.6	-95	-204	132.8	2.26	0.03	Not required
	AG0-Ant5		0.526		5mm	-65.5	37	-207				
	WLAN		0.848		5mm							
Case 20	AG1-Ant2	Back	0.882	0.88	5mm	-51.6	-95	-204	132.8	2.22	0.02	Not required
	AG0-Ant7		0.485		5mm	-65.5	37	-207				
	WLAN		0.848		5mm							
Case 21	AG1-Ant2	Back	0.882	0.88	5mm	-51.6	-95	-204	132.8	2.08	0.02	Not required
	AG0-Ant10		0.351		5mm	-65.5	37	-207				
	WLAN		0.848		5mm							
Case 22	AG1-Ant8	Back	0.618	0.62	5mm	-54	-71	-207	108.6	2.10	0.03	Not required
	AG0-Ant1		0.631		5mm	-65.5	37	-207				
	WLAN		0.848		5mm							
Case 23	AG1-Ant8	Back	0.618	0.62	5mm	-54	-71	-207	108.6	2.08	0.03	Not required
	AG0-Ant4		0.615		5mm	-65.5	37	-207				
	WLAN		0.848		5mm							
Case 24	AG1-Ant8	Back	0.618	0.62	5mm	-54	-71	-207	108.6	1.99	0.03	Not required
	AG0-Ant5		0.526		5mm	-65.5	37	-207				
	WLAN		0.848		5mm							
Case 25	AG1-Ant8	Back	0.618	0.62	5mm	-54	-71	-207	108.6	1.95	0.03	Not required
	AG0-Ant7		0.485		5mm	-65.5	37	-207				
	WLAN		0.848		5mm							
Case 26	AG1-Ant8	Back	0.618	0.62	5mm	-54	-71	-207	108.6	1.82	0.02	Not required
	AG0-Ant10		0.351		5mm	-65.5	37	-207				
	WLAN		0.848		5mm							

Case No	Band	Position	SAR (W/kg)		Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
						X	Y	Z				
Case 27	AG1-Ant2	Right Side	0.774	0.77	5mm	-28.2	63.2	-204	84.0	1.92	0.03	Not required
	AG0-Ant5		0.629	1.14	5mm	-28.8	-20.7	-207				
	WLAN		0.513		5mm							
Case 28	AG1-Ant8	Right Side	1.274	1.27	5mm	-30.6	75	-204	81.0	1.91	0.03	Not required
	AG0-Ant1		0.122	0.64	5mm	-25.6	-5.8	-204				
	WLAN		0.513		5mm							
Case 29	AG1-Ant8	Right Side	1.274	1.27	5mm	-30.6	75	-204	115.8	1.91	0.02	Not required
	AG0-Ant4		0.125	0.64	5mm	-28.8	-40.7	-207				
	WLAN		0.513		5mm							
Case 30	AG1-Ant8	Right Side	1.274	1.27	5mm	-30.6	75	-204	115.8	2.42	0.03	Not required



	AG0-Ant5		0.629	1.14	5mm	-28.8	-40.7	-207				
	WLAN		0.513		5mm							
Case 31	AG1-Ant8	Right Side	1.274	0.53	5mm	-30.6	75	-204	115.8	1.80	0.02	Not required
	AG0-Ant7		0.012		5mm	-28.8	-40.7	-207				
	WLAN		0.513		5mm							
Case 32	AG1-Ant8	Right Side	1.274	0.53	5mm	-30.6	75	-204	115.8	1.80	0.02	Not required
	AG0-Ant10		0.015		5mm	-28.8	-40.7	-207				
	WLAN		0.513		5mm							

<Body-worn>

Case No	Band	Position	SAR (W/kg)		Gap	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					(mm)	X	Y	Z				
Case 1	AG1-Ant0	Front	1.166	1.17	5mm	-41.1	-76	-204	149.0	2.57	0.03	Not required
	AG0-Ant1		0.875	1.41	5mm	-52.8	72.5	-204				
	WLAN		0.532		5mm							
Case 2	AG1-Ant0	Front	1.166	1.17	5mm	-41.1	-76	-204	119.9	1.89	0.02	Not required
	AG0-Ant4		0.192	0.72	5mm	-19.8	42	-207				
	WLAN		0.532		5mm							
Case 3	AG1-Ant0	Front	1.166	1.17	5mm	-41.1	-76	-204	119.9	2.27	0.03	Not required
	AG0-Ant5		0.569	1.10	5mm	-19.8	42	-207				
	WLAN		0.532		5mm							
Case 4	AG1-Ant0	Front	1.166	1.17	5mm	-41.1	-76	-204	119.9	2.30	0.03	Not required
	AG0-Ant7		0.602	1.13	5mm	-19.8	42	-207				
	WLAN		0.532		5mm							
Case 5	AG1-Ant0	Front	1.166	1.17	5mm	-41.1	-76	-204	100.7	2.28	0.03	Not required
	AG0-Ant10		0.578	1.11	5mm	-72.2	19.8	-204				
	WLAN		0.532		5mm							
Case 6	AG1-Ant2	Front	1.299	1.30	5mm	-33.3	-79.5	-204	122.3	2.71	0.04	Not required
	AG0-Ant1		0.875	1.41	5mm	-19.8	42	-207				
	WLAN		0.532		5mm							
Case 7	AG1-Ant2	Front	1.299	1.30	5mm	-33.3	-79.5	-204	122.3	2.02	0.02	Not required
	AG0-Ant4		0.192	0.72	5mm	-19.8	42	-207				
	WLAN		0.532		5mm							
Case 8	AG1-Ant2	Front	1.299	1.30	5mm	-33.3	-79.5	-204	122.3	2.40	0.03	Not required
	AG0-Ant5		0.569	1.10	5mm	-19.8	42	-207				
	WLAN		0.532		5mm							
Case 9	AG1-Ant2	Front	1.299	1.30	5mm	-33.3	-79.5	-204	122.3	2.43	0.03	Not required
	AG0-Ant7		0.602	1.13	5mm	-19.8	42	-207				
	WLAN		0.532		5mm							
Case 10	AG1-Ant2	Front	1.299	1.30	5mm	-33.3	-79.5	-204	106.6	2.41	0.04	Not required
	AG0-Ant10		0.578	1.11	5mm	-72.2	19.8	-204				
	WLAN		0.532		5mm							
Case 11	AG1-Ant8	Front	0.537	0.54	5mm	4	-69	-204	113.6	1.94	0.02	Not required
	AG0-Ant1		0.875	1.41	5mm	-19.8	42	-207				
	WLAN		0.532		5mm							
Case 27	AG1-Ant8	Front	0.537	0.54	5mm	4	-69	-204	113.6	1.64	0.02	Not required
	AG0-Ant5		0.569	1.10	5mm	-19.8	42	-207				
	WLAN		0.532		5mm							



Case 28	AG1-Ant8	Front	0.537	0.54	5mm	4	-69	-204	113.6	1.67	0.02	Not required
	AG0-Ant7		0.602	1.13	5mm	-19.8	42	-207				
	WLAN		0.532		5mm							
Case 29	AG1-Ant8	Front	0.537	0.54	5mm	4	-69	-204	113.6	1.65	0.02	Not required
	AG0-Ant10		0.578	1.11	5mm	-19.8	42	-207				
	WLAN		0.532		5mm							

Case No	Band	Position	SAR (W/kg)		Gap	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					(mm)	X	Y	Z				
Case 12	AG1-Ant0	Back	1.304	1.30	5mm	-7	-80.5	-207	131.3	2.88	0.04	Not required
	AG0-Ant1		0.895	1.57	5mm	-65.5	37	-207				
	WLAN		0.677		5mm							
Case 13	AG1-Ant0	Back	1.304	1.30	5mm	-7	-80.5	-207	131.3	2.86	0.04	Not required
	AG0-Ant4		0.882	1.56	5mm	-65.5	37	-207				
	WLAN		0.677		5mm							
Case 14	AG1-Ant0	Back	1.304	1.30	5mm	-7	-80.5	-207	131.3	2.86	0.04	Not required
	AG0-Ant5		0.877	1.55	5mm	-65.5	37	-207				
	WLAN		0.677		5mm							
Case 15	AG1-Ant0	Back	1.304	1.30	5mm	-7	-80.5	-207	131.3	2.86	0.04	Not required
	AG0-Ant7		0.875	1.55	5mm	-65.5	37	-207				
	WLAN		0.677		5mm							
Case 16	AG1-Ant0	Back	1.304	1.30	5mm	14.3	-73.2	-207	119.7	2.77	0.04	Not required
	AG0-Ant10		0.787	1.46	5mm	14	46.5	-207				
	WLAN		0.677		5mm							
Case 17	AG1-Ant2	Back	1.281	1.28	5mm	-51.6	-95	-204	132.8	2.85	0.04	Not required
	AG0-Ant1		0.895	1.57	5mm	-65.5	37	-207				
	WLAN		0.677		5mm							
Case 18	AG1-Ant2	Back	1.281	1.28	5mm	-51.6	-95	-204	132.8	2.84	0.04	Not required
	AG0-Ant4		0.882	1.56	5mm	-65.5	37	-207				
	WLAN		0.677		5mm							
Case 19	AG1-Ant2	Back	1.281	1.28	5mm	-51.6	-95	-204	132.8	2.84	0.04	Not required
	AG0-Ant5		0.877	1.55	5mm	-65.5	37	-207				
	WLAN		0.677		5mm							
Case 20	AG1-Ant2	Back	1.281	1.28	5mm	-51.6	-95	-204	132.8	2.83	0.04	Not required
	AG0-Ant7		0.875	1.55	5mm	-65.5	37	-207				
	WLAN		0.677		5mm							
Case 21	AG1-Ant2	Back	1.281	1.28	5mm	-51.6	-95	-204	132.8	2.75	0.03	Not required
	AG0-Ant10		0.787	1.46	5mm	-65.5	37	-207				
	WLAN		0.677		5mm							
Case 22	AG1-Ant8	Back	0.544	0.54	5mm	-54	-71	-207	108.6	2.12	0.03	Not required
	AG0-Ant1		0.895	1.57	5mm	-65.5	37	-207				
	WLAN		0.677		5mm							
Case 23	AG1-Ant8	Back	0.544	0.54	5mm	-54	-71	-207	108.6	2.10	0.03	Not required
	AG0-Ant4		0.882	1.56	5mm	-65.5	37	-207				
	WLAN		0.677		5mm							
Case 24	AG1-Ant8	Back	0.544	0.54	5mm	-54	-71	-207	108.6	2.10	0.03	Not required
	AG0-Ant5		0.877	1.55	5mm	-65.5	37	-207				
	WLAN		0.677		5mm							



Case 25	AG1-Ant8	Back	0.544	0.54	5mm	-54	-71	-207	108.6	2.10	0.03	Not required
	AG0-Ant7		0.875	1.55	5mm	-65.5	37	-207				
	WLAN		0.677		5mm							
Case 26	AG1-Ant8	Back	0.544	0.54	5mm	-54	-71	-207	108.6	2.01	0.03	Not required
	AG0-Ant10		0.787	1.46	5mm	-65.5	37	-207				
	WLAN		0.677		5mm							

<Extremity>

Case No	Band	Position	SAR (W/kg)		Gap	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					(mm)	X	Y	Z				
Case 1	AG1-Ant0	Front	1.493	1.49	0mm	-40.5	-86.1	-207	170.5	4.73	0.06	Not required
	AG0-Ant1		2.358	3.23	0mm	-66.4	82.4	-204				
	WLAN		0.876		0mm							
Case 2	AG1-Ant2	Front	3.138	3.14	0mm	-13.4	-80.6	-207	170.3	6.37	0.09	Not required
	AG0-Ant1		2.358	3.23	0mm	-30.6	88.8	-204				
	WLAN		0.876		0mm							
Case 3	AG1-Ant2	Front	3.138	3.14	0mm	-13.4	-80.6	-207	165.0	4.01	0.05	Not required
	AG0-Ant4			0.88	0mm	6	80.5	-177				
	WLAN		0.876		0mm							
Case 4	AG1-Ant2	Front	3.138	3.14	0mm	-13.4	-80.6	-207	165.0	4.01	0.05	Not required
	AG0-Ant5			0.88	0mm	6	80.5	-177				
	WLAN		0.876		0mm							
Case 5	AG1-Ant2	Front	3.138	3.14	0mm	-13.4	-80.6	-207	165.0	4.01	0.05	Not required
	AG0-Ant7			0.88	0mm	6	80.5	-177				
	WLAN		0.876		0mm							
Case 6	AG1-Ant2	Front	3.138	3.14	0mm	-13.4	-80.6	-207	165.0	4.01	0.05	Not required
	AG0-Ant10			0.88	0mm	6	80.5	-177				
	WLAN		0.876		0mm							

Case No	Band	Position	SAR (W/kg)		Gap	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					(mm)	X	Y	Z				
Case 7	AG1-Ant0	Back	1.909	1.91	0mm	12.5	-72.6	-207	125.0	5.05	0.09	Not required
	AG0-Ant1		2.464	3.14	0mm	23.4	48.3	-177				
	WLAN		0.674		0mm							
Case 8	AG1-Ant0	Back	1.909	1.91	0mm	12.5	-72.6	-207	125.0	4.66	0.08	Not required
	AG0-Ant4		2.081	2.76	0mm	23.4	48.3	-177				
	WLAN		0.674		0mm							
Case 9	AG1-Ant0	Back	1.909	1.91	0mm	12.5	-72.6	-207	115.5	4.40	0.08	Not required
	AG0-Ant7		1.821	2.50	0mm	5.2	42.7	-207				
	WLAN		0.674		0mm							
Case 10	AG1-Ant2	Back	2.153	2.15	0mm	-16.1	-84.2	-207	141.5	5.29	0.09	Not required
	AG0-Ant1		2.464	3.14	0mm	23.4	48.3	-177				
	WLAN		0.674		0mm							
Case 11	AG1-Ant2	Back	2.153	2.15	0mm	-16.1	-84.2	-207	141.5	4.91	0.08	Not required
	AG0-Ant4		2.081	2.76	0mm	23.4	48.3	-177				
	WLAN		0.674		0mm							
Case 12	AG1-Ant2	Back	2.153	2.15	0mm	-51.8	-72.1	-204	128.2	4.65	0.08	Not required



AG0-Ant7		1.821	2.50	0mm	5.2	42.7	-207				
WLAN		0.674		0mm							

Case No	Band	Position	SAR (W/kg)	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
						X	Y	Z				
Case 13	AG1-Ant8	Right side	3.186	3.19	0mm	-28.2	86.2	-204	164.8	6.22	0.09	Not required
	AG0-Ant5		2.471	3.03	0mm	-29.2	-78.6	-204				
	WLAN		0.561		0mm							

18.8 Maximum Report SAR And SAR Peak Locations

General Note:

- The maximum report SAR and SAR Peak Locations corresponding to each position of each frequency band of each antenna in the below tables are as follows.
- The unit of SAR evaluation is W/kg. The unit of x, y, z with Axis evaluation is mm.

<Head>

Left Cheek										
BT Ant3	SAR (W/kg)	0.28		WLAN2.4G MIMO	SAR (W/kg)	0.378				
	Axis	X 19.7 Y 332.5 Z -174.2			Axis	X 19.7 Y 332.5 Z -174.2				
BT Ant6	SAR (W/kg)	0.095		WLAN5G MIMO	SAR (W/kg)	0.374		WLAN6E MIMO	SAR (W/kg)	0.389
	Axis	X 56.4 Y 324.1 Z -173.7			Axis	X 16.2 Y 325.8 Z -174.3			Axis	X 39.9 Y 327 Z -175.1

Left Cheek									
Band		Ant1	Ant4	Ant5	Ant7	Ant10	Ant0	Ant2	Ant8
GSM850	SAR (W/kg)	0.408					0.167		
	Axis	X 7.6 Y 295.4 Z -169					X 58 Y 216.6 Z -172.1		
GSM1900	SAR (W/kg)	0.38						0.073	
	Axis	X -10 Y 301.6 Z -166.5						X 62 Y 205.6 Z -169	
WCDMA II	SAR (W/kg)	0.423						0.095	
	Axis	X -9.5 Y 302.1 Z -166.5						X 62.3 Y 204.8 Z -169.2	
WCDMA IV	SAR (W/kg)	0.287						0.093	
	Axis	X -10.5 Y 298.5 Z -165.7						X 54.8 Y 210.2 Z -170	
WCDMA V	SAR (W/kg)	0.425					0.172		
	Axis	X 7.5 Y 295.2 Z -169					X 56.9 Y 214.5 Z -172.1		
LTE Band 2	SAR (W/kg)	0.409						0.155	
	Axis	X -9.3 Y 301.4 Z -166.5						X 61 Y 206 Z -169.4	
LTE Band 7	SAR (W/kg)	0.518				0.874	0.193	0.157	
	Axis	X 5.8 Y 311.8 Z -170				X 39 Y 294.6 Z -173	X 54.6 Y 202.4 Z -174.6	X 55.6 Y 208.1 Z -170.7	
LTE Band 12	SAR (W/kg)	0.358					0.194		
	Axis	X 2.1 Y 288 Z -167					X 57.1 Y 215.5 Z -172.1		
LTE Band 26	SAR (W/kg)	0.406					0.197		
	Axis	X 7.7 Y 294.8 Z -169					X 56.6 Y 217.5 Z -172.4		
LTE Band 66	SAR (W/kg)	0.273						0.092	
	Axis	X -10.7 Y 298.9 Z -165.7						X 55.6 Y 211 Z -170.7	
LTE Band 41	SAR (W/kg)	0.569				0.891	0.185	0.089	
	Axis	X 5.5 Y 311.2 Z -170				X 36.8 Y 297.6 Z -172.9	X 49.5 Y 206.4 Z -175.4	X 55.1 Y 206.2 Z -170.1	
LTE Band 42 Part 27Q	SAR (W/kg)				0.238				
	Axis				X 35.6 Y 259.2 Z -171.3				
FR1 n5	SAR (W/kg)	0.381					0.163		
	Axis	X 7.1 Y 293.6 Z -169					X 57 Y 215.8 Z -172.4		



FR1 n66	SAR (W/kg)	0.3						0.107	
	Axis	X -9.8 Y 296.6 Z -169						X 55.2 Y 211.2 Z -170	
FR1 n41	SAR (W/kg)	0.489			0.493	0.296		0.099	
	Axis	X 5.9 Y 309.8 Z -170			X 38 Y 295.3 Z -173	X 52.2 Y 204.8 Z -175.4	X 54.9 Y 205.8 Z -170.2		
FR1 n77	SAR (W/kg)		0.844	0.886	0.402				0.205
	Axis		X 18.6 Y 328.1 Z -171.3	X 25.7 Y 338.1 Z -174.1	X 36.4 Y 258.7 Z -171.4				X 56.2 Y 210.5 Z -172

<Hotspot>

Front					
BT Ant3	SAR	0.196	WLAN2.4G MIMO	SAR	0.301
	Axis	X -13.5 Y 82.3 Z -207		Axis	X -14.6 Y 81.6 Z -207
BT Ant6	SAR	0.086	WLAN5G MIMO	SAR	0.532
	Axis	X -19.8 Y 42 Z -207		Axis	X -10.9 Y 75.1 Z -207
Back					
BT Ant3	SAR	0.21	WLAN2.4G MIMO	SAR	0.425
	Axis	X -57.5 Y 72.5 Z -207		Axis	X -53 Y 67 Z -207
BT Ant6	SAR	0.159	WLAN5G MIMO	SAR	0.638
	Axis	X -65.5 Y 37 Z -207		Axis	X -53.4 Y 63.6 Z -207
Right side					
BT Ant3	SAR	0.066	WLAN2.4G MIMO	SAR	0.13
	Axis	X -26.3 Y -41.5 Z -207		Axis	X -25.8 Y -41.7 Z -207
BT Ant6	SAR	0.285	WLAN5G MIMO	SAR	0.228
	Axis	X -25.8 Y -61 Z -207		Axis	X -28.8 Y -40.7 Z -207

Front									
Band		Ant1	Ant4	Ant5	Ant7	Ant10	Ant0	Ant2	Ant8
GSM850	SAR	0.401					0.581		
	Axis	X -53.2 Y 73.8 Z -204					X -41.5 Y -76.3 Z -204		
GSM1900	SAR	0.331						1.195	
	Axis	X -67.2 Y 74 Z -204						X -12.8 Y -83.1 Z -207	
WCDMA II	SAR	0.361						1.06	
	Axis	X -66.6 Y 74.2 Z -204						X -5.5 Y -87.4 Z -207	
WCDMA IV	SAR	0.286						1.025	
	Axis	X -67.6 Y 74.6 Z -204						X -8.3 Y -87.9 Z -207	
WCDMA V	SAR	0.279					0.77		
	Axis	X -52.4 Y 72.7 Z -204					X -41.2 Y -76 Z -204		
LTE Band 2	SAR	0.339						0.902	
	Axis	X -67 Y 75 Z -204						X -11 Y -87.1 Z -207	
LTE Band 7	SAR	0.417				0.236	0.907	0.799	
	Axis	X -34 Y 81 Z -204				X -72.2 Y 19.8 Z -204	X -41.5 Y -89 Z -207	X -34 Y -80 Z -204	
LTE Band 12	SAR	0.354					0.489		
	Axis	X -53.5 Y 73.5 Z -204					X -53.5 Y -87 Z -204		
LTE Band 26	SAR	0.418					0.398		
	Axis	X -53.5 Y 73.5 Z -204					X -41.5 Y -76.5 Z -204		
LTE Band 66	SAR	0.293						0.985	
	Axis	X -68.5 Y 75 Z -204						X -14.8 Y -85.9 Z -207	
LTE Band 41	SAR	0.345				0.257	0.483	0.55	
	Axis	X -33.6 Y 81.5 Z -204				X -71.8 Y 20.2 Z -204	X -41.2 Y -89.6 Z -207	X -33.6 Y -80.2 Z -204	
LTE Band 42 Part 27Q	SAR				0.327				
	Axis				X -65 Y 50 Z -204				
FR1 n5	SAR	0.373					0.538		
	Axis	X -52.8 Y 72.5 Z -204					X -41.1 Y -76 Z -204		
FR1 n66	SAR	0.312						0.914	
	Axis	X -68.1 Y 74.2 Z -204						X -11.8 Y -84 Z -207	
FR1 n41	SAR	0.369				0.262	0.91	0.738	



FR1 n77	Axis	X -41.2 Y 78.9 Z -207				X -72 Y 20 Z -204	X -41.6 Y -89.3 Z -207	X -34.2 Y -79.8 Z -204	
	SAR		0.134	0.093	0.149				0.521
	Axis		X -34 Y 88 Z -204	X 6 Y 77 Z -204	X -65 Y 50 Z -204				X 4 Y -69 Z -204

Back									
Band		Ant1	Ant4	Ant5	Ant7	Ant10	Ant0	Ant2	Ant8
GSM850	SAR	0.615					0.972		
	Axis	X -5.4 Y 66.1 Z -207					X 14.8 Y -74.7 Z -207		
GSM1900	SAR	0.631						0.842	
	Axis	X -4.3 Y 66.6 Z -207						X -51.4 Y -95.2 Z -204	
WCDMA II	SAR	0.626						0.825	
	Axis	X -7.8 Y 78.9 Z -207						X -51.6 Y -95 Z -204	
WCDMA IV	SAR	0.62						0.882	
	Axis	X -7 Y 79.2 Z -207						X -41.1 Y -105 Z -204	
WCDMA V	SAR	0.62					1.267		
	Axis	X -7.9 Y 77.6 Z -207					X 15.2 Y -75 Z -207		
LTE Band 2	SAR	0.619						0.739	
	Axis	X -5.8 Y 78.7 Z -207						X -52 Y -95 Z -204	
LTE Band 7	SAR	0.421				0.268	0.842	0.855	
	Axis	X -6.5 Y 73.5 Z -207				X 14 Y 46.5 Z -207	X -7 Y -80.5 Z -207	X -15 Y -103.5 Z -207	
LTE Band 12	SAR	0.626					0.853		
	Axis	X -5.4 Y 66.8 Z -207					X 3.5 Y -87 Z -204		
LTE Band 26	SAR	0.615					0.715		
	Axis	X -8.4 Y 77.1 Z -207					X 14.6 Y -74.2 Z -207		
LTE Band 66	SAR	0.613						0.785	
	Axis	X -2.5 Y 78.2 Z -207						X -41.5 Y -105.5 Z -204	
LTE Band 41	SAR	0.368				0.351	0.464	0.729	
	Axis	X -7.5 Y 74 Z -207				X 14 Y 47.5 Z -207	X -6 Y -80.5 Z -207	X -16 Y -101.5 Z -207	
LTE Band 42 Part 27Q	SAR				0.457				
	Axis				X 10.5 Y 59.5 Z -207				
FR1 n66	SAR	0.622						0.735	
	Axis	X -0.7 Y 76.8 Z -207						X -42.6 Y -104.8 Z -204	
FR1 n41	SAR	0.396				0.317	0.862	0.824	
	Axis	X -22.5 Y 76.5 Z -207				X 11 Y 46.5 Z -207	X -4 Y -83.5 Z -207	X -17 Y -102 Z -207	
FR1 n77	SAR		0.615	0.526	0.374				0.618
	Axis		X -45.5 Y 82 Z -207	X -66.2 Y 73 Z -207	X 6.8 Y 59.6 Z -207				X -54 Y -71 Z -207

Right side									
Band		Ant1	Ant4	Ant5	Ant7	Ant10	Ant0	Ant2	Ant8
GSM850	SAR	0.108					0.108		
	Axis	X -26.6 Y -6.2 Z -204					X -25.6 Y -9.2 Z -204		
GSM1900	SAR	0.025						0.774	
	Axis	X -25.3 Y -72.1 Z -204						X -27.6 Y 69.2 Z -204	
WCDMA II	SAR	0.031						0.549	
	Axis	X -24.6 Y -71.8 Z -204						X -27.1 Y 68.8 Z -204	
WCDMA IV	SAR	0.006						0.491	
	Axis	X -25.5 Y -76.2 Z -204						X -27.6 Y 69.2 Z -204	
WCDMA V	SAR	0.076					0.15		
	Axis	X -26.2 Y -6.6 Z -204					X -25.1 Y -8.8 Z -204		
LTE Band 2	SAR	0.028						0.456	
	Axis	X -25 Y -72 Z -204						X -27.4 Y 69 Z -204	
LTE Band 7	SAR	0.033				0.015	0.057	0.244	
	Axis	X -28.2 Y -73 Z -204				X -25.5 Y -61.8 Z -207	X -32.4 Y 71.3 Z -204	X -27.4 Y 64 Z -204	
LTE Band	SAR	0.119					0.107		



12	Axis	X -25.8 Y -6 Z -204					X -25.8 Y 1.5 Z -204		
LTE Band 26	SAR	0.122					0.097		
	Axis	X -26.6 Y -6 Z -204					X -25.8 Y -9 Z -204		
LTE Band 66	SAR	0.009						0.443	
	Axis	X -25.8 Y -76.5 Z -204						X -27.4 Y 69 Z -204	
LTE Band 41	SAR	0.024				0.006	0.074	0.168	
	Axis	X -28.9 Y -72.3 Z -204				X -25.2 Y -62.1 Z -207	X -31.6 Y 71.2 Z -204	X -27.3 Y 64.2 Z -204	
LTE Band 42 Part 27Q	SAR								NA
	Axis								NA
FR1 n5	SAR	0.095					0.065		
	Axis	X -26.2 Y -6.3 Z -204					X -25.6 Y -9.2 Z -204		
FR1 n66	SAR	0.01						0.416	
	Axis	X -25.3 Y -76.1 Z -204						X -28.6 Y 69.5 Z -204	
FR1 n41	SAR	0.025				0.013	0.128	0.261	
	Axis	X -28.8 Y -72.1 Z -204				X -25.5 Y -62 Z -207	X -32.2 Y 71 Z -204	X -28.2 Y 63.2 Z -204	
FR1 n77	SAR		0.125	0.629	0.012				1.274
	Axis		X -34.6 Y -60 Z -204	X -25.8 Y -62 Z -204	X -34.6 Y -79 Z -204				X -30.6 Y 75 Z -204

<Body-worn>

Front									
BT Ant3	SAR	0.092	WLAN2.4G MIMO	SAR	0.248				
	Axis	X -13.5 Y 82.3 Z -207		Axis	X -14.6 Y 81.6 Z -207				
BT Ant6	SAR	0.046	WLAN5G MIMO	SAR	0.275	WLAN6E MIMO	SAR	0.172	
	Axis	X -19.8 Y 42 Z -207		Axis	X -10.9 Y 75.1 Z -207		Axis	X 1.5 Y 72.3 Z -207	
Back									
BT Ant3	SAR	0.102	WLAN2.4G MIMO	SAR	0.374				
	Axis	X -57.5 Y 72.5 Z -207		Axis	X -53 Y 67 Z -207				
BT Ant6	SAR	0.086	WLAN5G MIMO	SAR	0.389	WLAN6E MIMO	SAR	0.066	
	Axis	X -65.5 Y 37 Z -207		Axis	X -53.4 Y 63.6 Z -207		Axis	X -50.4 Y 64.5 Z -207	

Front									
Band		Ant1	Ant4	Ant5	Ant7	Ant10	Ant0	Ant2	Ant8
GSM850	SAR	0.541					0.581		
	Axis	X -53.2 Y 73.8 Z -204					X -41.5 Y -76.3 Z -204		
GSM1900	SAR	0.423						1.299	
	Axis	X -67.2 Y 74 Z -204						X -12.8 Y -83.1 Z -207	
WCDMA II	SAR	0.506						1.295	
	Axis	X -66.6 Y 74.2 Z -204						X -5.5 Y -87.4 Z -207	
WCDMA IV	SAR	0.406						1.283	
	Axis	X -67.6 Y 74.6 Z -204						X -8.3 Y -87.9 Z -207	
WCDMA V	SAR	0.397					0.77		
	Axis	X -52.4 Y 72.7 Z -204					X -41.2 Y -76 Z -204		
LTE Band 2	SAR	0.48						1.278	
	Axis	X -67 Y 75 Z -204						X -11 Y -87.1 Z -207	
LTE Band 7	SAR	0.844				0.324	1.08	1.188	
	Axis	X -34 Y 81 Z -204				X -72.2 Y 19.8 Z -204	X -41.5 Y -89 Z -207	X -34 Y -80 Z -204	
LTE Band 12	SAR	0.493					0.489		
	Axis	X -53.5 Y 73.5 Z -204					X -53.5 Y -87 Z -204		
LTE Band 26	SAR	0.515					0.398		
	Axis	X -53.5 Y 73.5 Z -204					X -41.5 Y -76.5 Z -204		
LTE Band 66	SAR	0.423						1.293	
	Axis	X -68.5 Y 75 Z -204						X -14.8 Y -85.9 Z -207	
LTE Band	SAR	0.875				0.578	0.761	1.201	



41	Axis	X -33.6 Y 81.5 Z -204				X -71.8 Y 20.2 Z -204	X -41.2 Y -89.6 Z -207	X -33.6 Y -80.2 Z -204	
LTE Band 42 Part 27Q	SAR				0.382				
	Axis				X -65 Y 50 Z -204				
FR1 n5	SAR	0.527					0.538		
	Axis	X -52.8 Y 72.5 Z -204					X -41.1 Y -76 Z -204		
FR1 n66	SAR	0.438						1.296	
	Axis	X -68.1 Y 74.2 Z -204						X -11.8 Y -84 Z -207	
FR1 n41	SAR	0.825				0.401	1.166	1.229	
	Axis	X -41.2 Y 78.9 Z -207				X -72 Y 20 Z -204	X -41.6 Y -89.3 Z -207	X -34.2 Y -79.8 Z -204	
FR1 n77	SAR		0.192	0.569	0.602				0.537
	Axis		X -34 Y 88 Z -204	X 6 Y 77 Z -204	X -65 Y 50 Z -204				X 4 Y -69 Z -204

Back									
Band		Ant1	Ant4	Ant5	Ant7	Ant10	Ant0	Ant2	Ant8
GSM850	SAR	0.831					0.972		
	Axis	X -5.4 Y 66.1 Z -207					X 14.8 Y -74.7 Z -207		
GSM1900	SAR	0.806						0.915	
	Axis	X -4.3 Y 66.6 Z -207						X -51.4 Y -95.2 Z -204	
WCDMA II	SAR	0.88						1.007	
	Axis	X -7.8 Y 78.9 Z -207						X -51.6 Y -95 Z -204	
WCDMA IV	SAR	0.885						1.116	
	Axis	X -7 Y 79.2 Z -207						X -41.1 Y -105 Z -204	
WCDMA V	SAR	0.882					1.267		
	Axis	X -7.9 Y 77.6 Z -207					X 15.2 Y -75 Z -207		
LTE Band 2	SAR	0.884						1.078	
	Axis	X -5.8 Y 78.7 Z -207						X -52 Y -95 Z -204	
LTE Band 7	SAR	0.883				0.471	1.288	1.272	
	Axis	X -6.5 Y 73.5 Z -207				X 14 Y 46.5 Z -207	X -7 Y -80.5 Z -207	X -15 Y -103.5 Z -207	
LTE Band 12	SAR	0.872					0.853		
	Axis	X -5.4 Y 66.8 Z -207					X 3.5 Y -87 Z -204		
LTE Band 26	SAR	0.759					0.715		
	Axis	X -8.4 Y 77.1 Z -207					X 14.6 Y -74.2 Z -207		
LTE Band 66	SAR	0.888						1.114	
	Axis	X -2.5 Y 78.2 Z -207						X -41.5 Y -105.5 Z -204	
LTE Band 41	SAR	0.895				0.787	1.304	1.281	
	Axis	X -7.5 Y 74 Z -207				X 14 Y 47.5 Z -207	X -6 Y -80.5 Z -207	X -16 Y -101.5 Z -207	
LTE Band 42 Part 27Q	SAR				0.617				
	Axis				X 10.5 Y 59.5 Z -207				
FR1 n5	SAR	0.872					0.74		
	Axis	X -4.2 Y 76.6 Z -207					X 14.3 Y -73.2 Z -207		
FR1 n66	SAR	0.874						1.033	
	Axis	X -0.7 Y 76.8 Z -207						X -42.6 Y -104.8 Z -204	
FR1 n41	SAR	0.887				0.485	1.267	1.267	
	Axis	X -22.5 Y 76.5 Z -207				X 11 Y 46.5 Z -207	X -4 Y -83.5 Z -207	X -17 Y -102 Z -207	
FR1 n77	SAR		0.882	0.877	0.875				0.544
	Axis		X -45.5 Y 82 Z -207	X -66.2 Y 73 Z -207	X 6.8 Y 59.6 Z -207				X -54 Y -71 Z -207

<Extremity>

Front						
WLAN5G MIMO	SAR	0.981				
	Axis	X -10.9 Y 95.1 Z -207				
WLAN6E MIMO	SAR	0.125		NFC	SAR	0.002
	Axis	X -10.6 Y 95.1 Z -207			Axis	X 6 Y 80.5 Z -177
Back						
WLAN5G MIMO	SAR	0.655				



	Axis	X -58.5 Y 74.1 Z -207			
WLAN6E MIMO	SAR	0.078	NFC	SAR	0.02
	Axis	X -62.5 Y 78.5 Z -207		Axis	X 23.4 Y 48.3 Z -177
Right side					
WLAN5G MIMO	SAR	0.559			
	Axis	X -27.1 Y -80.6 Z -207			
WLAN6E MIMO	SAR	0.104	NFC	SAR	0.001
	Axis	X -26.3 Y -81.5 Z -207		Axis	X -28.6 Y -80.1 Z -177

Front									
Band		Ant1	Ant4	Ant5	Ant7	Ant10	Ant0	Ant2	Ant8
GSM850	SAR	NA					NA		
	Axis	NA					NA		
GSM1900	SAR	1.55						2.529	
	Axis	X -65.2 Y 82.6 Z -204						X-13.2 Y -82.6 Z -207	
WCDMA II	SAR	1.758						3.108	
	Axis	X -66.4 Y 82.4 Z -204						X-12.1 Y -81.3 Z -207	
WCDMA IV	SAR	1.351						3.136	
	Axis	X -66.8 Y 85.2 Z -204						X -7.6 Y -85.4 Z -207	
WCDMA V	SAR	NA					NA		
	Axis	NA					NA		
LTE Band 2	SAR	1.543						2.769	
	Axis	X -65.8 Y 83.1 Z -204						X-13.4 Y -80.6 Z -207	
LTE Band 7	SAR	1.887				NA	NA	2.496	
	Axis	X -32.5 Y 90.1 Z -204				NA	NA	X -30.5 Y -86.7 Z -204	
LTE Band 12	SAR	NA					NA		
	Axis	NA					NA		
LTE Band 26	SAR	NA					NA		
	Axis	NA					NA		
LTE Band 66	SAR	1.298						3.138	
	Axis	X -67.2 Y 84.6 Z -204						X -7.2 Y -86.1 Z -207	
LTE Band 41	SAR	2.15				NA	NA	NA	
	Axis	X -31.8 Y 89.6 Z -204				NA	NA	NA	
LTE Band 42 Part 27Q	SAR				NA				
	Axis				NA				
FR1 n5	SAR	NA					NA		
	Axis	NA					NA		
FR1 n66	SAR	1.497						3.127	
	Axis	X -66.2 Y 83.8 Z -204						X -8.3 Y -84.8 Z -207	
FR1 n41	SAR	2.358				NA	1.493	2.807	
	Axis	X -31.1 Y 89.2 Z -204				NA	X -40.5 Y -86.1 Z -207	X -32.9 Y -86.4 Z -204	
FR1 n77	SAR		NA	NA	NA				NA
	Axis		NA	NA	NA				NA



Back									
Band		Ant1	Ant4	Ant5	Ant7	Ant10	Ant0	Ant2	Ant8
GSM850	SAR	NA					1.885		
	Axis	NA					X 12.5 Y -72.6 Z -207		
GSM1900	SAR	2.336						NA	
	Axis	X -2.8 Y 63.1 Z -207						NA	
WCDMA II	SAR	2.441						1.624	
	Axis	X -2.9 Y 64.2 Z -207						X -52.4 Y -74.2 Z -204	
WCDMA IV	SAR	2.432						2.153	
	Axis	X -6.6 Y 78.4 Z -207						X -42.6 Y -87.7 Z -204	
WCDMA V	SAR	NA					NA		
	Axis	NA					NA		
LTE Band 2	SAR	1.821						1.659	
	Axis	X -3.8 Y 63.2 Z -207						X -51.8 Y -72.1 Z -204	
LTE Band 7	SAR	2.072				NA	NA	1.7	
	Axis	X -5.9 Y 74.9 Z -207				NA	NA	X -13.5 Y -87.5 Z -207	
LTE Band 12	SAR	NA					NA		
	Axis	NA					NA		
LTE Band 26	SAR	NA					NA		
	Axis	NA					NA		
LTE Band 66	SAR	1.925						2.1	
	Axis	X -6.9 Y 77.1 Z -207						X -40.1 Y -85.7 Z -204	
LTE Band 41	SAR	1.97				NA	NA	NA	
	Axis	X -5.2 Y 73.3 Z -207				NA	NA	NA	
LTE Band 42 Part 27Q	SAR				1.633				
	Axis				X 11.2 Y 45.2 Z -207				
FR1 n5	SAR	NA					NA		
	Axis	NA					NA		
FR1 n66	SAR	2.464						2.129	
	Axis	X -7.5 Y 76.1 Z -207						X -42.3 Y -82.6 Z -204	
FR1 n41	SAR	2.229				NA	1.909	1.818	
	Axis	X -4.8 Y 71.1 Z -207				NA	X -5.2 Y -80.1 Z -207	X -15.8 Y -86.3 Z -207	
FR1 n77	SAR		2.081	0.905	1.821				NA
	Axis		X -46.1 Y 80.5 Z -207	X -64.8 Y 76.2 Z -207	X 5.2 Y 42.7 Z -207				NA



Right side									
Band		Ant1	Ant4	Ant5	Ant7	Ant10	Ant0	Ant2	Ant8
GSM850	SAR	NA					NA		
	Axis	NA					NA		
GSM1900	SAR	NA						NA	
	Axis	NA						NA	
WCDMA II	SAR	NA						NA	
	Axis	NA						NA	
WCDMA IV	SAR	NA						NA	
	Axis	NA						NA	
WCDMA V	SAR	NA					NA		
	Axis	NA					NA		
LTE Band 2	SAR	NA						NA	
	Axis	NA						NA	
LTE Band 7	SAR	NA				NA	NA	NA	
	Axis	NA				NA	NA	NA	
LTE Band 12	SAR	NA					NA		
	Axis	NA					NA		
LTE Band 26	SAR	NA					NA		
	Axis	NA					NA		
LTE Band 66	SAR	NA						NA	
	Axis	NA						NA	
LTE Band 41	SAR	NA				NA	NA	NA	
	Axis	NA				NA	NA	NA	
LTE Band 42 Part 27Q	SAR				NA				
	Axis				NA				
FR1 n5	SAR	NA					NA		
	Axis	NA					NA		
FR1 n66	SAR	NA						NA	
	Axis	NA						NA	
FR1 n41	SAR	NA				NA	NA	NA	
	Axis	NA				NA	NA	NA	
FR1 n77	SAR		NA	2.471	NA				3.186
	Axis		NA	X -29.2 Y -78.6 Z -204	NA				X -28.2 Y 86.2 Z -204

19. Supplemental Tuner Tests Results

General Note:

1. This device implements impedance tuner (208 states) antenna tuning techniques in the LTE Band 5/12/17/26, and 5GNR n5 for ANT0.
2. This device implements impedance tuner (208 states) antenna tuning techniques in the LTE Band 2/4/5/7/12/17/26/38/41/66 and 5GNR n5/41/66 for ANT1.
3. This device implements impedance tuner (16 states) antenna tuning techniques in the LTE Band 2/4/7/38/41/66 and 5GNR n41/66 for ANT2.
4. LTE B17 / B5 / B4 / B38 SAR test was covered by LTE B12 / B26 / B66 / B41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced.
5. Per 2019, April TCBC Workshop titled "RF Exposure Procedures", the following test procedure was followed to demonstrate that the SAR results in this report represent the appropriate SAR test conditions.
 - 1) SAR is measured according to required procedures with dynamic tuner active allowing device to automatically tune. Auto-tune state determined by device during normal SAR measurement verified and listed alongside the reported SAR results.
 - 2) Total number tuner states divided evenly among each supported band / air interface and exposure condition combination.
 - 3) The tuner state was established remotely through Wi-Fi so that the device is not moved for the entire series of single point SAR for the tuner states in each combination (band, mode, exposure conditions).
 - 4) Single point measurements performed at the peak SAR location of the highest measured SAR configuration for each combination. SAR probe remains stationary throughout the entire series of single point measurements for each combination.
 - 5) If any single point SAR measurement result is > 1.2 W/kg for 1gSAR (or > 3.0 W/kg for 10gSAR) for a band/exposure condition combination set, all supported tuner states are evaluated with single point SAR measurements for the combination.
6. The above test procedures were followed to demonstrate that the SAR results in Section 17 represented the appropriate SAR test conditions. For bands with dynamic tuning implemented, SAR will be measured according to the required FCC SAR test procedures with the dynamic tuner active to allow the device to automatically tune to the antenna state for the respective RF exposure test configurations. Additional single point SAR time-sweep measurements will be evaluated for other tuner states to determine that the other tuner configurations would result in equivalent or lower SAR values.
7. To evaluate all of the tuner states, the 208 tuner states for ANT0/1 and the 16 tuner states for ANT2 is divided evenly among band, mode and exposure combinations so that at least one single point SAR measurement is measured in each configuration. Single point time-sweep measurements will be performed at the peak SAR location determined by the zoom scan of the configuration with the highest reported SAR for each combination. The tuner state will be established remotely so that the device is not moved for the entire series of single point SAR for the tuner states in each combination. The SAR probe will remain stationary at the same position throughout the entire series of single point measurements for each combination. When the single point SAR or 1g SAR was > 1.2 W/kg or 10g SAR was > 3.0 W/kg for a particular band / mode / exposure condition, point SAR measurements were made for all 144 tuner states.
8. According to KDB 648474 D04 v01r03, in order to reduce the number of SAR tests required to demonstrate compliance for the numerous tuning states, certain SAR screening procedures were considered to identify the higher SAR between body-worn and hotspot scenarios that need normally required SAR measurements and allow SAR test reduction for the lower SAR conditions.
9. According to KDB 648474 D04 v01r03, this design will provide the highest power at different user scenarios and would not influence to the antenna characteristics other than impedance matching. The additional tuner hardware has no influence to the antenna characteristics, other than impedance matching.
10. The operational decryption contains more information about the design and implementation of the dynamic antenna tuning.

Test Engineer : Martin Li, Varus Wang, Light Wang, Ricky Gu

20. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

Declaration of Conformity:

The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	$1/k^{(b)}$	$1/\sqrt{3}$	$1/\sqrt{6}$	$1/\sqrt{2}$

- (a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity
 (b) k is the coverage factor

Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

The judgment of conformity in the report is based on the measurement results excluding the measurement uncertainty.

Uncertainty Budget According to IEC/IEEE 62209-1528 (Frequency band: 4 MHz - 10 GHz range)							
Error Description	Uncert. Value (±%)	Prob. Dist.	Div.	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System errors							
Probe calibration	18.6	N	2	1	1	9.3	9.3
Probe calibration drift	1.7	R	1.732	1	1	1.0	1.0
Probe linearity and detection Limit	4.7	R	1.732	1	1	2.7	2.7
Broadband signal	2.8	R	1.732	1	1	1.6	1.6
Probe isotropy	7.6	R	1.732	1	1	4.4	4.4
Other probe and data acquisition errors	2.4	N	1	1	1	2.4	2.4
RF ambient and noise	1.8	N	1	1	1	1.8	1.8
Probe positioning errors	0.006	N	1	0.5	0.5	0.0	0.0
Data processing errors	4.0	N	1	1	1	4.0	4.0
Phantom and Device Errors							
Measurement of phantom conductivity (σ)	2.5	N	1	0.78	0.71	2.0	1.8
Temperature effects (medium)	5.4	R	1.732	0.78	0.71	2.4	2.2
Shell permittivity	14.0	R	1.732	0.5	0.5	4.0	4.0
Distance between the radiating element of the DUT and the phantom medium	2.0	N	1	2	2	4.0	4.0
Repeatability of positioning the DUT or source against the phantom	1.0	N	1	1	1	1.0	1.0
Device holder effects	3.6	N	1	1	1	3.6	3.6
Effect of operating mode on probe sensitivity	2.4	R	1.732	1	1	1.4	1.4
Time-average SAR	1.7	R	1.732	1	1	1.0	1.0
Variation in SAR due to drift in output of DUT	2.5	N	1	1	1	2.5	2.5
Validation antenna uncertainty (validation measurement only)	0.0	N	1	1	1	0.0	0.0
Uncertainty in accepted power (validation measurement only)	0.0	N	1	1	1	0.0	0.0
Correction to the SAR results							
Phantom deviation from target (ϵ', σ)	1.9	N	1	1	0.84	1.9	1.6
SAR scaling	0.0	R	1.732	1	1	0.0	0.0
Combined Std. Uncertainty						14.5%	14.4%
Coverage Factor for 95 %						K=2	K=2
Expanded STD Uncertainty						29.0%	28.8%

SAR Uncertainty Budget for frequency range 4MHz to 10GHz

21. References

- [1] FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
- [2] ANSI/IEEE Std. C95.1-1992, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”, September 1992
- [3] IEEE Std. 1528-2013, “IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, Sep 2013
- [4] IEC/IEEE 62209-1528:2020, “Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Part 1528: Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz)”, Oct. 2020
- [5] SPEAG DASY System Handbook
- [6] FCC KDB 865664 D01 v01r04, “SAR Measurement Requirements for 100 MHz to 6 GHz”, Aug 2015.
- [7] FCC KDB 865664 D02 v01r02, “RF Exposure Compliance Reporting and Documentation Considerations” Oct 2015.
- [8] FCC KDB 648474 D04 v01r03, “SAR Evaluation Considerations for Wireless Handsets”, Oct 2015.
- [9] FCC KDB 248227 D01 v02r02, “SAR Guidance for IEEE 802.11 (WiFi) Transmitters”, Oct 2015.
- [10] FCC KDB 616217 D04 v01r02, “SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers”, Oct 2015
- [11] FCC KDB 941225 D01 v03r01, “3G SAR MEAUREMENT PROCEDURES”, Oct 2015
- [12] FCC KDB 941225 D05 v02r05, “SAR Evaluation Considerations for LTE Devices”, Dec 2015
- [13] FCC KDB 941225 D05A v01r02, “Rel. 10 LTE SAR Test Guidance and KDB Inquiries”, Oct 2015
- [14] FCC KDB 941225 D06 v02r01, “SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities”, Oct 2015.
- [15] FCC KDB 447498 D01 v06, “Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies”, Oct 2015
- [16] FCC KDB 484596 D01 v02r02, “Test Reductions Via Data Referencing”, Dec. 2023

-----THE END-----