



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2401-1
FCC ID : IHDT56AQ7
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : 15E 6 GHz Low Power Indoor Client (6XD)
TEST DATE(S) : Feb. 25, 2024 ~ May 07, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



Table of Contents

Summary of Test Result.....4

1 General Description5

1.1 Applicant5

1.2 Manufacturer5

1.3 Product Feature of Equipment Under Test.....5

1.4 Product Specification of Equipment Under Test.....6

1.5 Modification of EUT9

1.6 Testing Location9

1.7 Test Software.....9

1.8 Applicable Standards.....9

1.9 Specification of Accessory.....10

2 Test Configuration of Equipment Under Test11

2.1 Carrier Frequency and Channel11

2.2 Test Mode14

2.3 Connection Diagram of Test System15

2.4 Support Unit used in test configuration and system16

2.5 EUT Operation Test Setup16

2.6 Measurement Results Explanation Example.....17

3 Test Result18

3.1 26dB & 99% Occupied Bandwidth Measurement18

3.2 Maximum conducted Output Power and Fundamental Maximum EIRP Measurement19

3.3 Fundamental Power Spectral Density Measurement20

3.4 In-Band Emissions (Channel Mask)22

3.5 Contention Based Protocol24

3.6 Unwanted Emissions Measurement33

3.7 AC Conducted Emission Measurement.....37

3.8 Antenna Requirements39

4 List of Measuring Equipment.....40

5 Measurement Uncertainty41

Appendix A. Conducted Test Results

Appendix B. AC Conducted Emission Test Result

Appendix C. Radiated Spurious Emission

Appendix D. Duty Cycle Plots

Appendix E. Setup Photographs



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.407(a)(11)	26dB Emission Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.407(a)(8)	Maximum Conducted Output Power	Reporting only	-
3.2	15.407(a)(8)	Fundamental Maximum EIRP	Pass	-
3.3	15.407(a)(8)	Fundamental Power Spectral Density	Pass	-
3.4	15.407(b)(7)	In-Band Emissions (Channel Mask)	Pass	-
3.5	15.407(d)(6)	Contention Based Protocol	Pass	-
3.6	15.407(b)	Unwanted Emissions	Pass	Under limit 3.19 dB at 7125.010 MHz
3.7	15.207	AC Conducted Emission	Pass	Under limit 14.03 dB at 0.176 MHz
3.8	15.203 15.407(a)	Antenna Requirement	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2401-1
FCC ID	IHDT56AQ7
IMEI Code	Conducted: 357505570025855/357505570025863 Conduction: 357505570026234/357505570026242 Radiation: 357505570026119/357505570026127 CBP: 357505570025756/357505570025764
HW Version	DVT2
SW Version	UUV34.71
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	U-NII-5: 5925 MHz ~ 6425 MHz U-NII-6: 6425 MHz ~ 6525 MHz U-NII-7: 6525 MHz ~ 6875 MHz U-NII-8: 6875 MHz ~ 7125 MHz
Maximum EIRP	<MIMO Ant.5+4> 802.11a : 7.97 dBm / 0.0063 W 802.11be EHT20 : 8.57 dBm / 0.0072 W 802.11be EHT40 : 11.58 dBm / 0.0144 W 802.11be EHT80 : 14.34 dBm / 0.0272 W 802.11be EHT160 : 13.89 dBm / 0.0245 W 802.11be EHT320 : 13.56 dBm / 0.0227 W
99% Occupied Bandwidth	802.11a : 18.14 MHz 802.11be EHT20 : 19.50 MHz 802.11be EHT40 : 38.76 MHz 802.11be EHT80 : 78.96 MHz 802.11be EHT160 : 159.84 MHz 802.11be EHT320 : 316.48 MHz
Antenna Type / Gain	<5925 MHz ~ 6425 MHz > <Ant. 5> : IFA Antenna with gain -7.0 dBi <Ant. 4> : IFA Antenna with gain -5.0 dBi <6425 MHz ~ 6525 MHz > <Ant. 5> : IFA Antenna with gain -7.0 dBi <Ant. 4> : IFA Antenna with gain -6.0 dBi <6525 MHz ~ 6875 MHz > <Ant. 5> : IFA Antenna with gain -7.0 dBi <Ant. 4> : IFA Antenna with gain -6.0 dBi <6875 MHz ~ 7125 MHz > <Ant. 5> : IFA Antenna with gain -7.0 dBi <Ant. 4> : IFA Antenna with gain -6.0 dBi
Type of Modulation	802.11a : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM) 802.11be: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM / 4096QAM)

Remark:

1. For 802.11ax/be mode, the 11ax power are less than 11be power, thus the testing has assessed only 802.11be EHT20/EHT40/EHT80/EHT160MHz by referring to the higher output power.
2. The device support WIFI MIMO CDD mode only.
3. 802.11ax/be support full RU tone and partial RU tone, both full RU and partial RU-left (for low CH) and partial RU-right (for high CH) are tested for Power/PSD/Mask/Spurious, all the other test case were performed with full RU with its maximum power/PSD.
4. 802.11be support small size RU, Large size RU and Puncturing modes as below, which is less than full RU conducted power, therefore have assessed only Power Density/RSE.
5. The CBP mode does not support channel puncturing function. (Channel puncturing is only used for optimizing network performance).



<Small size RU 52+26 Tone>:

Bandwidth	Tones		Index		For test modes configure
20MHz	26	52	1	38	1
20MHz	52	26	38	4	2
20MHz	52	26	39	7	3

<Small size RU 106+26 Tone>:

Bandwidth	Tones		Index		For test modes configure
20MHz	106	26	53	4	1
20MHz	26	106	4	54	2

<Large size RU 484+242 tone> & <80M BW Puncturing 20MHz>:

Bandwidth	Tones		Index		For test modes configure
80MHz	242	484	62	66	1
80MHz	242	484	61	66	2
80MHz	484	242	65	64	3
80MHz	484	242	65	63	4

<Large size RU 996+484 tone> & <160M BW Puncturing 40MHz>:

Bandwidth	Tones		Index		For test modes configure
160MHz	484-Left	996-Right	66-Left	67-Right	1
160MHz	484-Left	996-Right	65-Left	67-Right	2
160MHz	996-Left	484-Right	67-Left	66-Right	3
160MHz	996-Left	484-Right	67-Left	65-Right	4

<Large size RU 996+484+242 tone> & <160M BW Puncturing 20MHz>:

Bandwidth	Tones			Index			For test modes configure
160MHz	242-Left	484-Left	996-Right	62-Left	66-Left	67-Right	1
160MHz	242-Left	484-Left	996-Right	61-Left	66-Left	67-Right	2
160MHz	484-Left	242-Left	996-Right	65-Left	64-Left	67-Right	3
160MHz	484-Left	242-Left	996-Right	65-Left	63-Left	67-Right	4
160MHz	996-Left	242-Right	484-Right	67-Left	62-Right	66-Right	5
160MHz	996-Left	242-Right	484-Right	67-Left	61-Right	66-Right	6
160MHz	996-Left	484-Right	242-Right	67-Left	65-Right	64-Right	7
160MHz	996-Left	484-Right	242-Right	67-Left	65-Right	63-Right	8



<Large size RU 3*996 tone> & <320M BW Puncturing 80MHz>:

Bandwidth	Tones	Index	For test modes configure
320MHz			1
			2
			3
			4

<Large size RU 3*996+484 tone> & <320M BW Puncturing 40MHz>:

Bandwidth	Tones	Index	For test modes configure
320MHz			1
			2
			3
			4
			5
			6
			7
			8

<Large size RU 2*996+484 tone> & <320M BW Puncturing 80+40MHz>:

Bandwidth	Tones	Index	For test modes configure
320MHz			1
			2
			3
			4
			5
			6
			7
			8
			9
			10
			11
			12

Only the worse cases are shown in this report.



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH06-KS TH01-KS DFS01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH06-KS	AUDIX	E3	6.2009-8-24a
2.	CO01-KS	AUDIX	E3	6.2009-8-24
3.	DFS01-KS	Sporton	Test Tools	1.0

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 987594 D02 U-NII 6 GHz EMC Measurement v02r01
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



1.9 Specification of Accessory

Specification of Accessory				
AC Adapter 1(US)	Brand Name	Motorola(Chenyang)	Model Name	MC-1251
AC Adapter 1(EU)	Brand Name	Motorola(Chenyang)	Model Name	MC-1252
AC Adapter 1(UK)	Brand Name	Motorola(Chenyang)	Model Name	MC-1253
AC Adapter 1(AU)	Brand Name	Motorola(Chenyang)	Model Name	MC-1255
AC Adapter 1(AR)	Brand Name	Motorola(Chenyang)	Model Name	MC-1256
AC Adapter 1(BR)	Brand Name	Motorola(Chenyang)	Model Name	MC-1257
AC Adapter 2(US)	Brand Name	Motorola(AOHAI)	Model Name	MC-1251
AC Adapter 2(EU)	Brand Name	Motorola(AOHAI)	Model Name	MC-1252
AC Adapter 2(UK)	Brand Name	Motorola(AOHAI)	Model Name	MC-1253
AC Adapter 2(IN)	Brand Name	Motorola(AOHAI)	Model Name	MC-1254
AC Adapter 2(AU)	Brand Name	Motorola(AOHAI)	Model Name	MC-1255
AC Adapter 2(AR)	Brand Name	Motorola(AOHAI)	Model Name	MC-1256
AC Adapter 2(BR)	Brand Name	Motorola(AOHAI)	Model Name	MC-1257
AC Adapter 2(Chile)	Brand Name	Motorola(AOHAI)	Model Name	MC-1259
Battery	Brand Name	Motorola(ATL)	Model Name	QV45
USB Cable	Brand Name	Motorola(Saibao)	Model Name	SC18D71644
Wireless Earphone	Brand Name	Motorola	Model Name	XT2441-1
Wireless Charging dock	Marketing Name	Turbo Power 50W Wireless Charging Stand	Model Name	MW-02



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

<U-NII-5, 6, 7, 8>

BW 20M	Channel	2	1	5	9	13	17	21	25	29	
	Freq. (MHz)	5935	5955	5975	5995	6015	6035	6055	6075	6095	
BW 40M	Channel	3			11			19		27	
	Freq. (MHz)	5965			6005			6045		6085	
BW 80M	Channel	7					23				
	Freq. (MHz)	5985					6065				
BW 160M	Channel	15									
	Freq. (MHz)	6025									
BW 20M	Channel	33	37	41	45	49	53	57	61		
	Freq. (MHz)	6115	6135	6155	6175	6195	6215	6235	6255		
BW 40M	Channel	35			43			51		59	
	Freq. (MHz)	6125			6165			6205		6245	
BW 80M	Channel	39					55				
	Freq. (MHz)	6145					6225				
BW 160M	Channel	47									
	Freq. (MHz)	6185									
BW 320M	Channel	31					63				
	Freq. (MHz)	6105					6265				



BW 20M	Channel	65	69	73	77	81	85	89	93
	Freq. (MHz)	6275	6295	6315	6335	6355	6375	6395	6415
BW 40M	Channel	67		75		83		91	
	Freq. (MHz)	6285		6325		6365		6405	
BW 80M	Channel	71				87			
	Freq. (MHz)	6305				6385			
BW 160M	Channel	79							
	Freq. (MHz)	6345							
BW 320M	Channel	95							
	Freq. (MHz)	6425							

BW 20M	Channel	97	101	105	109	113	117	121	125
	Freq. (MHz)	6435	6455	6475	6495	6515	6535	6555	6575
BW 40M	Channel	99		107		115		123	
	Freq. (MHz)	6445		6485		6525		6565	
BW 80M	Channel	103				119			
	Freq. (MHz)	6465				6545			
BW 160M	Channel	111							
	Freq. (MHz)	6505							

BW 20M	Channel	129	133	137	141	145	149	153	157
	Freq. (MHz)	6595	6615	6635	6655	6675	6695	6715	6735
BW 40M	Channel	131		139		147		155	
	Freq. (MHz)	6605		6645		6685		6725	
BW 80M	Channel	135				151			
	Freq. (MHz)	6625				6705			
BW 160M	Channel	143							
	Freq. (MHz)	6665							
BW 320M	Channel	127							
	Freq. (MHz)	6585							



BW 20M	Channel	161	165	169	173	177	181	185	189
	Freq. (MHz)	6755	6775	6795	6815	6835	6855	6875	6895
BW 40M	Channel	163		171		179		187	
	Freq. (MHz)	6765		6805		6845		6885	
BW 80M	Channel	167				183			
	Freq. (MHz)	6785				6865			
BW 160M	Channel	175							
	Freq. (MHz)	6825							
BW 320M	Channel	159							
	Freq. (MHz)	6745							

BW 20M	Channel	193	197	201	205	209	213	217	221
	Freq. (MHz)	6915	6935	6955	6975	6995	7015	7035	7055
BW 40M	Channel	195		203		211		219	
	Freq. (MHz)	6925		6965		7005		7045	
BW 80M	Channel	199				215			
	Freq. (MHz)	6945				7025			
BW 160M	Channel	207							
	Freq. (MHz)	6985							
BW 320M	Channel	191							
	Freq. (MHz)	6905							

BW 20M	Channel	225		229		233			
	Freq. (MHz)	7075		7095		7115			
BW 40M	Channel	227							
	Freq. (MHz)	7085							



2.2 Test Mode

Final RSE test modes are considering the modulation and worse data rates refer to Appendix C.

Remark:

1. For Radiated Test Cases, the tests were performance with Adapter 1 and USB Cable.
2. For simultaneous transmission test modes, the combination testing was assessed from the worst RSE link mode of WWAN (GSM/WCDMA/LTE/5G NR) and the worst RSE link mode of BT / WLAN (2.4G/6G).

Test Cases	
AC Conducted Emission	Mode 1 : GSM850 Idle + BT Link + WLAN Link(6G) + USB Cable (Charging from Adapter 1)

Ch. #		5925-6425 MHz UNII-5	6425-6525 MHz UNII-6	6525-6875 MHz UNII-7	6875-7125 MHz UNII-8
		802.11a/be EHT20	802.11a/be EHT20	802.11a/be EHT20	802.11a/be EHT20
L	Low	001/002	097	117	189
M	Middle	045	105	149	209
H	High	093	113	181	229/233
Straddle		-	-	-	185

Ch. #		5925-6425 MHz UNII-5	6425-6525 MHz UNII-6	6525-6875 MHz UNII-7	6875-7125 MHz UNII-8
		802.11be EHT40	802.11be EHT40	802.11be EHT40	802.11be EHT40
L	Low	003	099	123	195
M	Middle	043	-	147	203
H	High	091	107	179	227
Straddle		-	115	-	187

Ch. #		5925-6425 MHz UNII-5	6425-6525 MHz UNII-6	6525-6875 MHz UNII-7	6875-7125 MHz UNII-8
		802.11be EHT80	802.11be EHT80	802.11be EHT80	802.11be EHT80
L	Low	007	103	135	199
M	Middle	039		-	
H	High	087		167	215
Straddle		-	119	183	-


Ch. #		5925-6425 MHz UNII-5	6425-6525 MHz UNII-6	6525-6875 MHz UNII-7	6875-7125 MHz UNII-8
		802.11be EHT160	802.11be EHT160	802.11be EHT160	802.11be EHT160
L	Low	015	-	143	207
M	Middle	047			
H	High	079			
Straddle		-	111	175	-

Ch. #		UNII-5	UNII-6	UNII-7	UNII-8
		802.11be EHT320	802.11be EHT320	802.11be EHT320	802.11be EHT320
L	Low	-	-	-	-
M	Middle	031			
H	High	063			
Straddle		095	127	159	191


Remark: For radiation spurious emission, the final modulation and the worst data rate was reference the max RF conducted power.

2.3 Connection Diagram of Test System

For AC Conducted Emission:

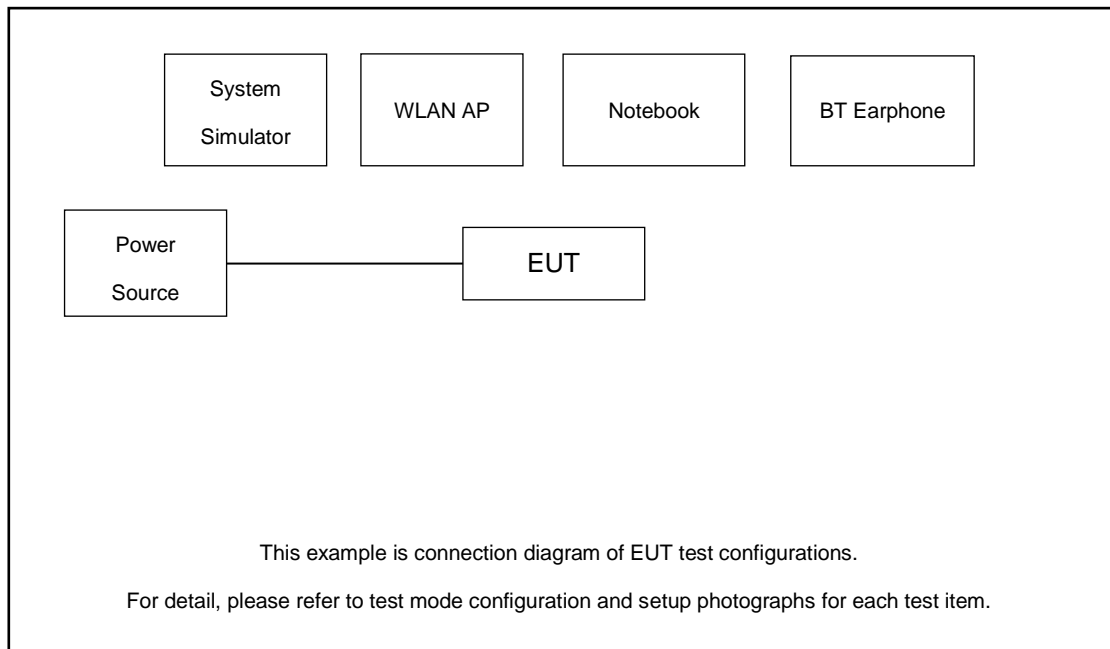

For Radiated Emission:

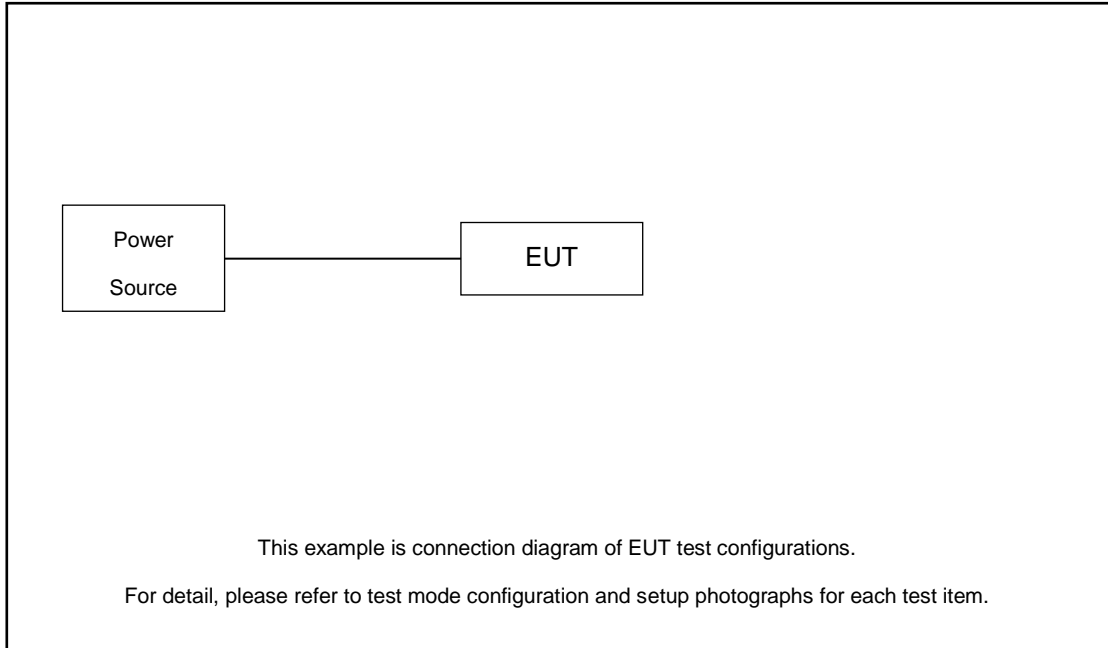

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritus	MT8821C	N/A	N/A	Unshielded,1.8m
2.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
3.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
4.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program (QRCT TX Tool) was provided and enabled to make EUT continuously transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 6.60 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 6.60 + 10 = 16.60 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 CFR 15.407 (a)(11)

The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.

3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
8. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Maximum conducted Output Power and Fundamental Maximum EIRP Measurement

3.2.1 Limit of Fundamental Maximum EIRP

<FCC 14-30 CFR 15.407>

(a)(8) For client devices operating under the control of an indoor access point in the 5.925-7.125 GHz bands, the maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm.

3.2.2 Measuring Instruments

See list of measuring equipment of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.
4. For MIMO mode, the measure-and-sum technique should be used for measuring the in-band transmit power of a device.

3.2.4 Test Setup

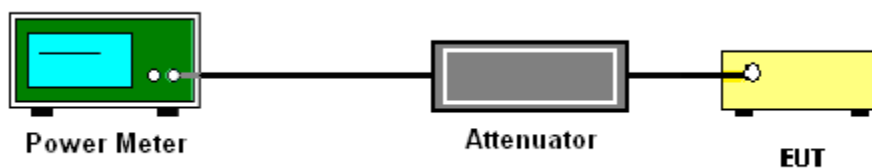

3.2.5 Test Result of Fundamental Maximum EIRP

Please refer to Appendix A.



3.3 Fundamental Power Spectral Density Measurement

3.3.1 Limit of Fundamental Power Spectral Density

<FCC 14-30 CFR 15.407>

(a)(8) For client devices operating under the control of an indoor access point in the 5.925-7.125 GHz bands, the maximum power spectral density must not exceed -1 dBm e.i.r.p. in any 1-megahertz band.

3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.

Method SA-2


(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW ≥ 3 MHz.
 - Number of points in sweep ≥ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, attenuator loss and duty factor. Measure the PPSD and record it.
 3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (b): Measure and sum spectral maxima across the outputs.

The measurement on each individual output were performed with the same span and number on each individual output. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs.

3.3.4 Test Setup

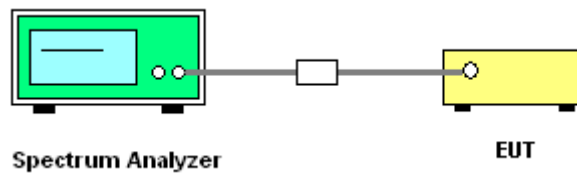

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.



3.4 In-Band Emissions (Channel Mask)

3.4.1 Limit of Unwanted Emissions

<FCC 14-30 CFR 15.407>

(b)(6) For transmitters operating within the 5.925-7.125 GHz bands: Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

3.4.2 Measuring Instruments

See list of measuring equipment of this test report.

3.4.3 Test Procedures


The testing follows FCC KDB 987594 D02 U-NII 6GHz EMC Measurement.

Section J) In-Band Emissions.

1. Take nominal bandwidth as reference channel bandwidth provided that 26 dB emission bandwidth is always larger than nominal bandwidth
2. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:
 - a) Set the span to encompass the entire 26 dB EBW of the signal.
 - b) Set RBW = same RBW used for 26 dB EBW measurement.
 - c) Set VBW $\geq 3 \times$ RBW
 - d) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
 - e) Sweep time = auto.
 - f) Detector = RMS (i.e., power averaging)
 - g) Trace average at least 100 traces in power averaging (rms) mode.
 - h) Use the peak search function on the instrument to find the peak of the spectrum.
3. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:
 - a. Suppressed by 20 dB at 1 MHz outside of the channel edge.
 - b. Suppressed by 28 dB at one channel bandwidth from the channel center.

- c. Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
4. Adjust the span to encompass the entire mask as necessary.
5. Clear trace.
6. Trace average at least 100 traces in power averaging (rms) mode.
7. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

3.4.4 Test Setup

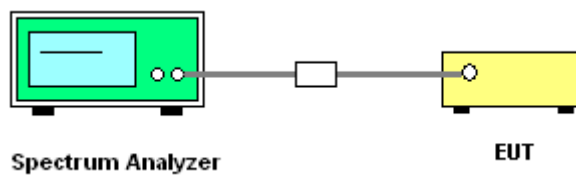

3.4.5 Test Result

Please refer to Appendix A.



3.5 Contention Based Protocol

3.5.1 Limit of Contention Based Protocol

<FCC 14-30 CFR 15.407>

(d)(6) Indoor access points, subordinate devices and client devices operating in the 5.925-7.125 GHz band must employ a contention-based protocol.

Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel and stay off the channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm). The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain. To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel. For example, an 802.11 device that plans to transmit a 40 MHz- wide signal (on a primary 20 MHz channel and a secondary 20 MHz channel) must detect energy throughout the entire 40 MHz channel. Additionally, low-power indoor devices must detect co-channel energy with 90% or greater certainty.

Table 1. Criteria to determine number of times detection threshold test may be performed

If	Number of Tests	Placement of Incumbent Transmission
$BW_{EUT} \leq BW_{Inc}$	Once	Tune incumbent and EUT transmissions ($f_{c1} = f_{c2}$)
$BW_{Inc} < BW_{EUT} \leq 2BW_{Inc}$	Once	Incumbent transmission is contained within BW_{EUT}
$2BW_{Inc} < BW_{EUT} \leq 4BW_{Inc}$	Twice. Incumbent transmission is contained within BW_{EUT}	Incumbent transmission is located as closely as possible to the lower edge and upper edge, respectively, of the EUT channel
$BW_{EUT} > 4BW_{Inc}$	Three times	Incumbent transmission is located as closely as possible to the lower edge of the EUT channel, in the middle of EUT channel, and as closely as possible to the upper edge of the EUT channel


where:

BW_{EUT} : Transmission bandwidth of EUT signal

BW_{Inc} : Transmission bandwidth of the simulated incumbent signal (10 MHz wide AWGN signal)

f_{c1} : Center frequency of EUT transmission

f_{c2} : Center frequency of simulated incumbent signal

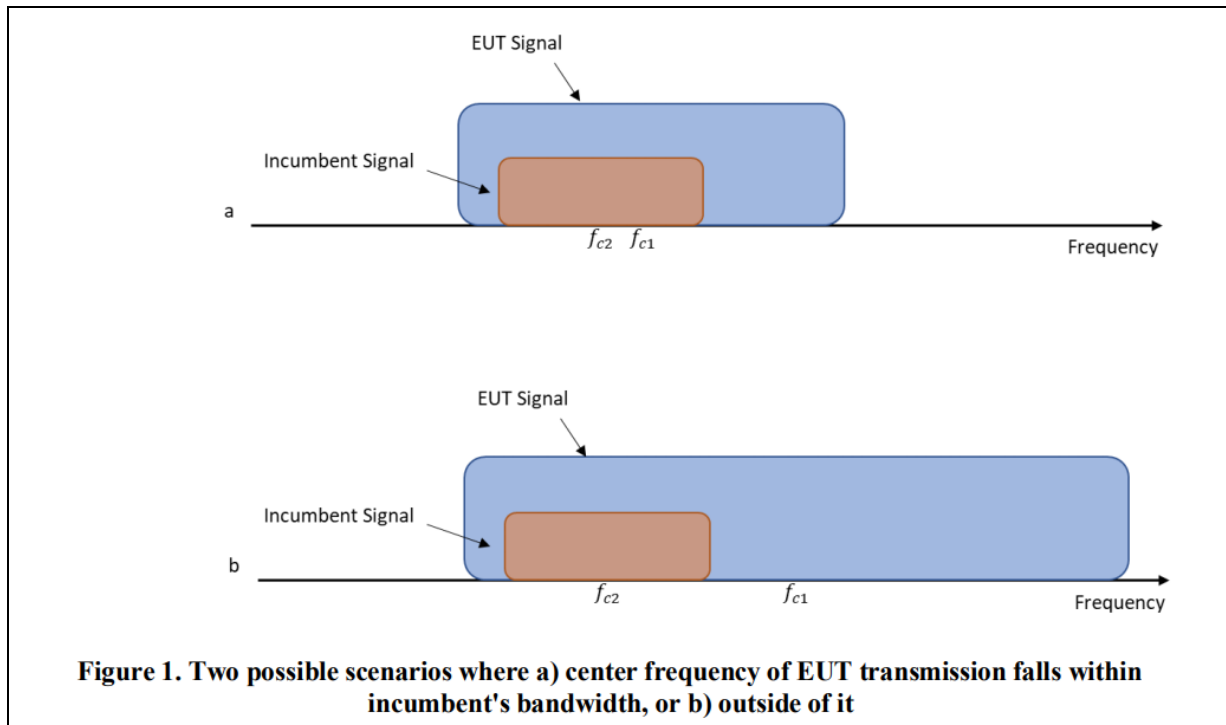

3.5.2 Measuring Instruments

See list of measuring equipment of this test report.


3.5.3 Test Procedures

1. To ensure EUT reliably detects an incumbent signal in both scenarios shown in Figure 1, the detection threshold test may be repeated more than once with the incumbent signal (having center frequency f_{c2}) tuned to different center frequencies within the UT transmission bandwidth. The criteria specified in Table 1 determines how many times the detection threshold test must be performed
2. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
3. Monitor the signal analyzer to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
4. (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
5. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 2, choose a different center

frequency for the AWGN signal and repeat the process.

6. EUT was driven in MIMO mode, the interferer signal was injected to both chains to monitor the performance, while the interferer level is determined according to the lowest antenna gain among both antennas.

3.5.4 Test Setup

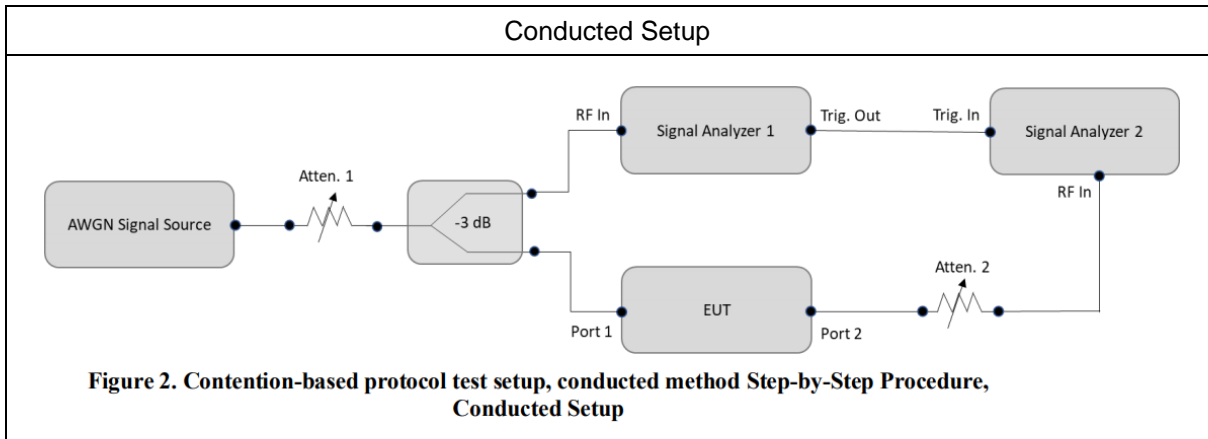

3.5.5 Support Unit used in test configuration and system

Instrument	Brand Name	Model No.	Characteristics
WLAN AP	ASUS	GT-AXE11000	Dual Band AP
Notebook	Acer	N15C1	LAN



3.5.6 Test Summary of Contention Based Protocol Test

Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)
UNII Band 5	6135	20	6135	-71.07	100	-62	-64.07	2.07
				Result: Stop Transmission				
				-72.07	< 90	-62	-65.07	3.07
				Result: Minimal Operation				
				-76.69	0	-62	-69.69	7.69
				Result: Normal Operation				
UNII Band 5	6105	320	5950	-77.10	100	-62	-70.1	8.1
				Result: Stop Transmission				
				-78.10	< 90	-62	-71.1	9.1
				Result: Minimal Operation				
				-79.33	0	-62	-72.33	10.33
				Result: Normal Operation				
			6105	-69.58 (worst)	100	-62	-62.58	0.58
				Result: Stop Transmission				
				-70.58	< 90	-62	-63.58	1.58
				Result: Minimal Operation				
				-71.49	0	-62	-64.49	2.49
				Result: Normal Operation				
6260	-69.64	100	-62	-62.64	0.64			
	Result: Stop Transmission							
	-70.64	< 90	-62	-63.64	1.64			
	Result: Minimal Operation							
-73.40	0	-62	-66.4	4.4				
Result: Normal Operation								

Note 1: Adjusted Power = Injected AWGN Level - minimum antenna gain (Ant 5, gain= -7.0dBi).

Note 2: Path Loss between antenna and RF connector is negligible. (0 dB)

Note 3: Margin = Regulated Threshold level - Adjusted Power



Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)
UNII Band 6	6455	20	6455	-71.63	100	-62	-64.63	2.63
				Result: Stop Transmission				
				-72.63	< 90	-62	-65.63	3.63
				Result: Minimal Operation				
				-75.50	0	-62	-68.5	6.5
				Result: Normal Operation				
UNII Band 5/6/7	6425	320	6270	-70.55	100	-62	-63.55	1.55
				Result: Stop Transmission				
				-71.55	< 90	-62	-64.55	2.55
				Result: Minimal Operation				
				-73.23	0	-62	-66.23	4.23
				Result: Normal Operation				
			6425	-70.99	100	-62	-63.99	1.99
				Result: Stop Transmission				
				-71.99	< 90	-62	-64.99	2.99
				Result: Minimal Operation				
				-72.71	0	-62	-65.71	3.71
				Result: Normal Operation				
6580	-77.47	100	-62	-70.47	8.47			
	Result: Stop Transmission							
	-78.47	< 90	-62	-71.47	9.47			
Result: Minimal Operation								
-78.65	0	-62	-71.65	9.65				
Result: Normal Operation								

Note 1: Adjusted Power = Injected AWGN Level - minimum antenna gain (Ant 5, gain= -7.0dBi).

Note 2: Path Loss between antenna and RF connector is negligible. (0 dB)

Note 3: Margin = Regulated Threshold level - Adjusted Power



Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)
UNII Band 7	6695	20	6695	-71.79	100	-62	-64.79	2.79
				Result: Stop Transmission				
				-72.79	< 90	-62	-65.79	3.79
				Result: Minimal Operation				
				-75.76	0	-62	-68.76	6.76
				Result: Normal Operation				
UNII Band 7/8	6745	160	6590	-72.06	100	-62	-65.06	3.06
				Result: Stop Transmission				
				-73.06	< 90	-62	-66.06	4.06
				Result: Minimal Operation				
				-73.60	0	-62	-66.6	4.6
				Result: Normal Operation				
			6745	-73.06	100	-62	-66.06	4.06
				Result: Stop Transmission				
				-74.06	< 90	-62	-67.06	5.06
				Result: Minimal Operation				
				-74.58	0	-62	-67.58	5.58
				Result: Normal Operation				
6900	-77.04	100	-62	-70.04	8.04			
	Result: Stop Transmission							
	-78.04	< 90	-62	-71.04	9.04			
	Result: Minimal Operation							
	-78.37	0	-62	-71.37	9.37			
	Result: Normal Operation							

Note 1: Adjusted Power = Injected AWGN Level - minimum antenna gain (Ant 5, gain= -7.0dBi).

Note 2: Path Loss between antenna and RF connector is negligible. (0 dB)

Note 3: Margin = Regulated Threshold level - Adjusted Power



Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)
UNII Band 8	7015	20	7015	-71.17	100	-62	-64.17	2.17
					Result: Stop Transmission			
				-72.17	< 90	-62	-65.17	3.17
					Result: Minimal Operation			
				-75.97	0	-62	-68.97	6.97
					Result: Normal Operation			


Note 1: Adjusted Power = Injected AWGN Level - minimum antenna gain (Ant 5, gain= -7.0dBi).

Note 2: Path Loss between antenna and RF connector is negligible. (0 dB)

Note 3: Margin = Regulated Threshold level - Adjusted Power



3.5.7 Worst Case Plots of Contention Based Protocol

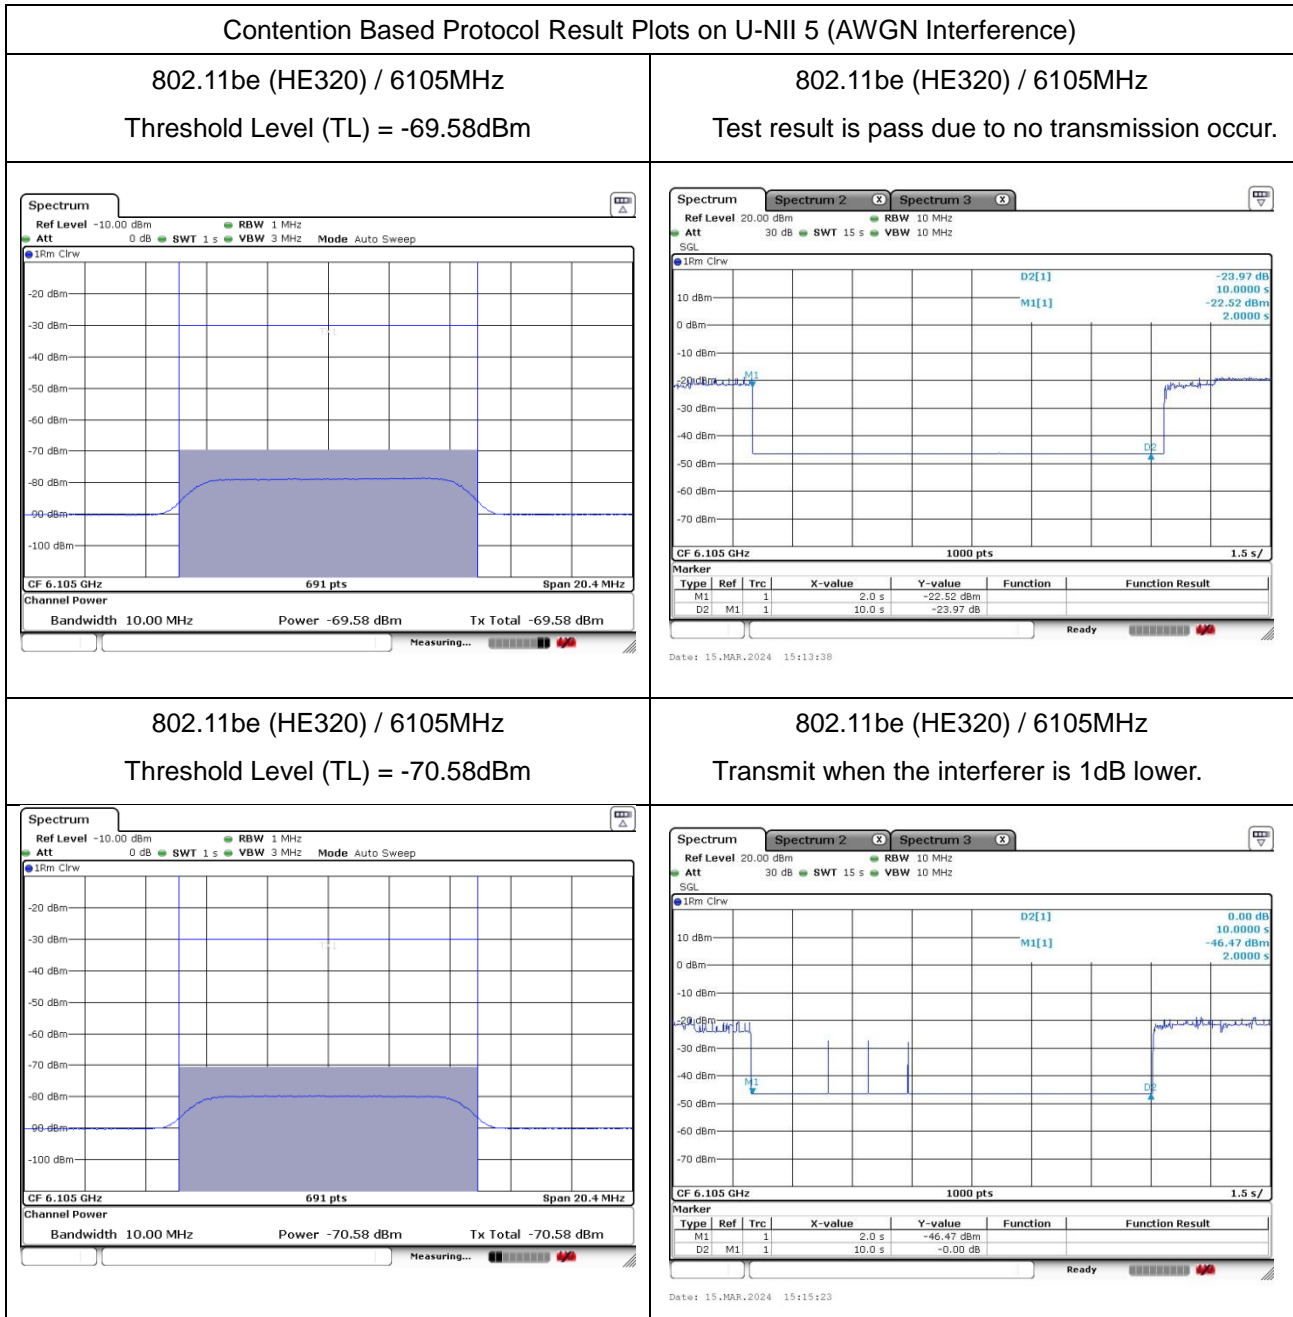


Remark: M1: Injection of AWGN signal, D1: Removal of AWGN signal



3.5.8 Worst Case of Contention Based Protocol Transmission Bandwidth

Verify transmission absence when Incumbent signal at different frequency (frequency domain plots).

1. When Incumbent Signal inject at lowest frequency, the transmission bandwidth reduced to 160MHz;
2. When Incumbent Signal inject at middle frequency, the whole 320MHz bandwidth stop transmission;
3. When Incumbent Signal inject at highest frequency, the transmission bandwidth reduced to 80MHz;
4. This device does not support channel puncturing mode for incumbent avoidance but bandwidth reduction mechanism is supported.

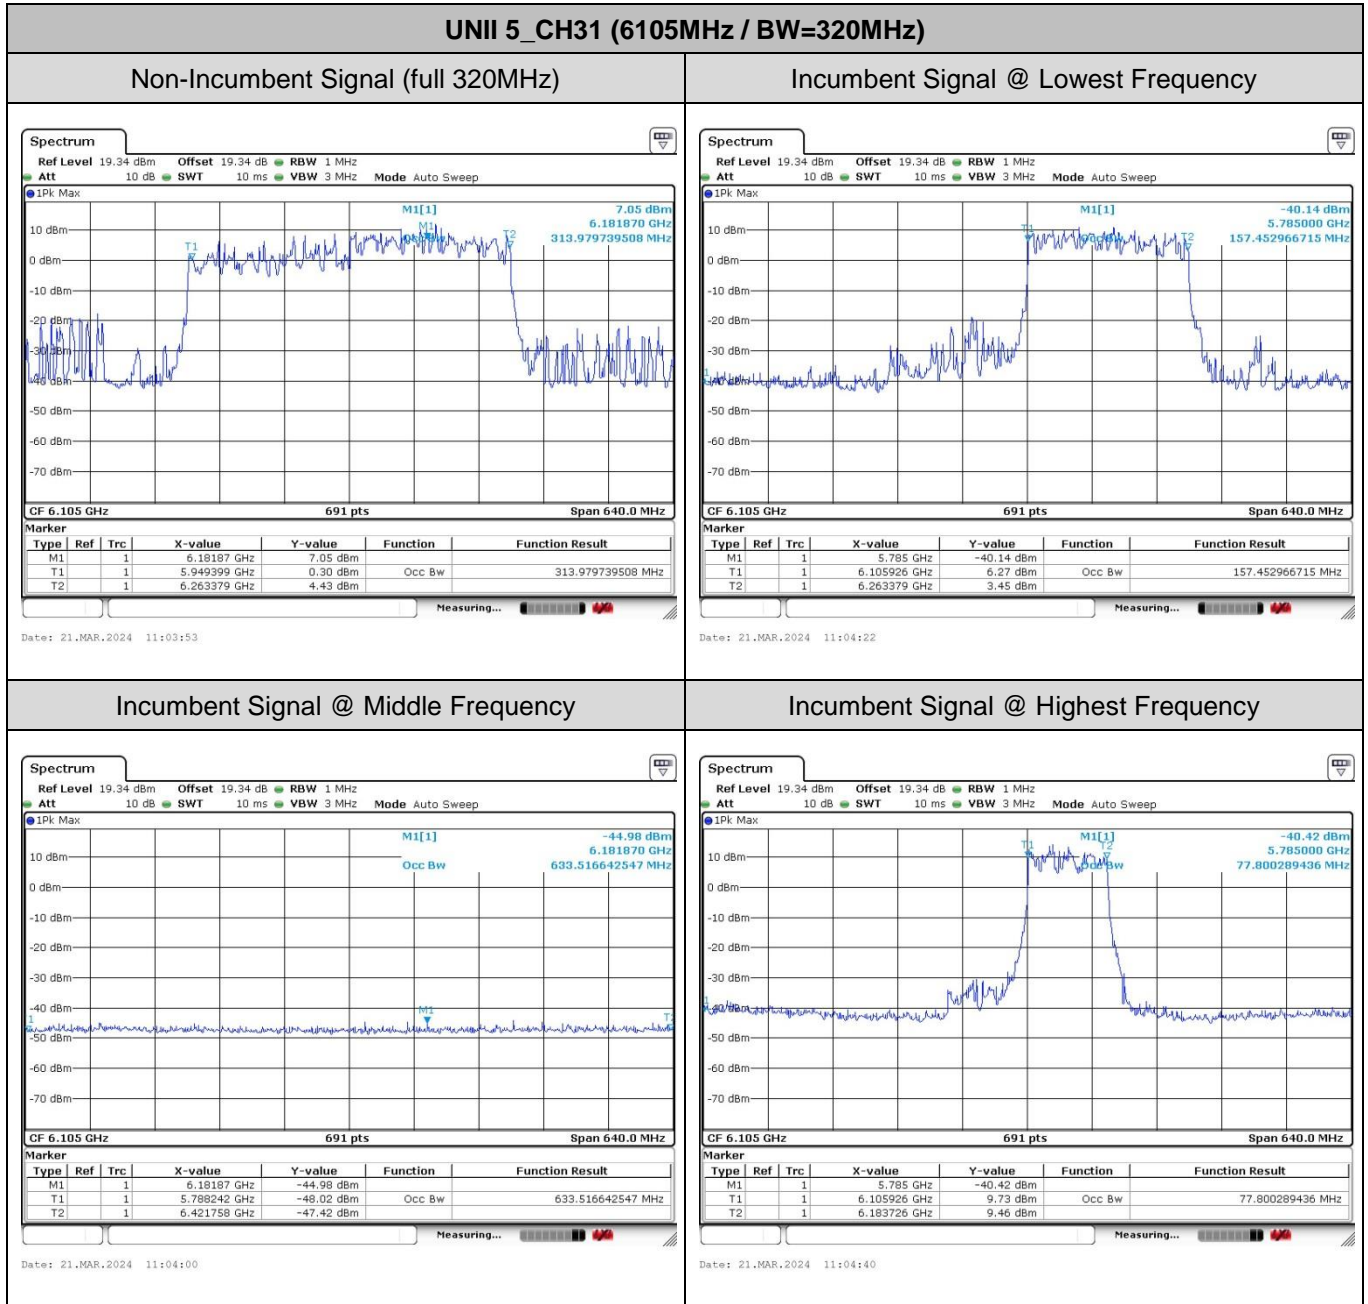

3.6 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.6.1 Limit of Unwanted Emissions

- (1) For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27 (RMS)	68.3
- 7 (Peak)	88.3

Unwanted emissions outside of restricted bands are measured with a RMS detector.

In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

3.6.2 Measuring Instruments

See list of measuring equipment of this test report.




3.6.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW \geq 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.6.4 Test Setup


For radiated emissions below 30MHz

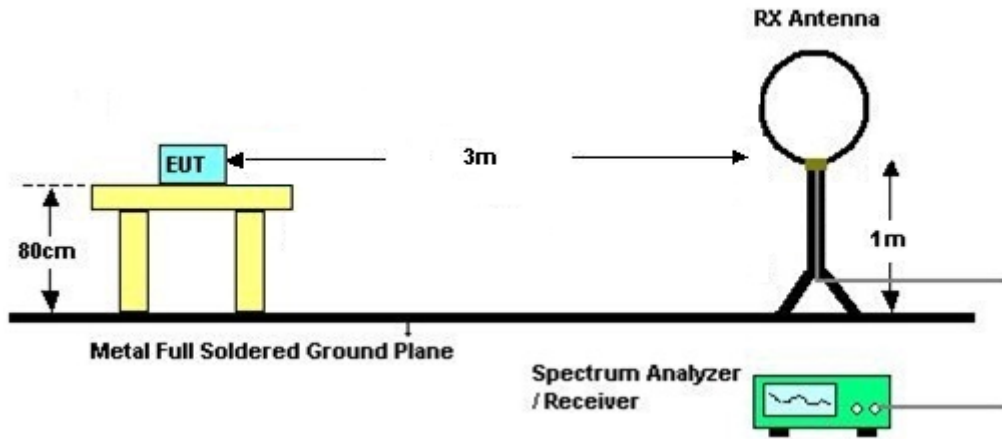

For radiated emissions from 30MHz to 1GHz

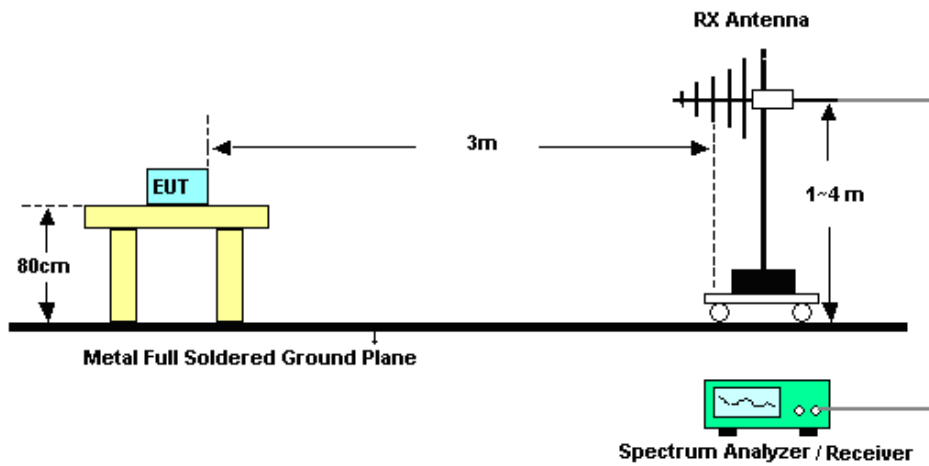

For radiated emissions above 1GHz

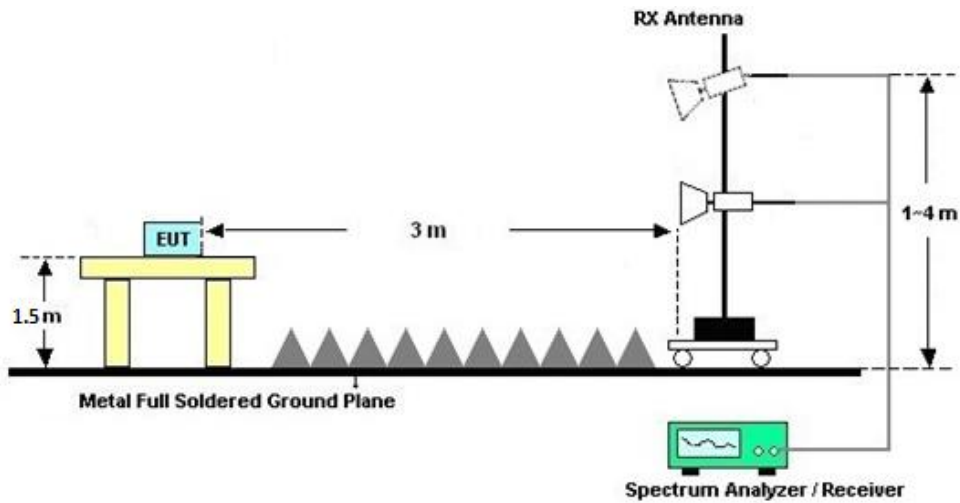

3.6.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.6.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C

3.6.7 Duty Cycle

Please refer to Appendix D.

3.6.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

The emission level above 18GHz is checked that the emission level is noise floor only, so it is not reflected in the report.



3.7 AC Conducted Emission Measurement

3.7.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.7.2 Measuring Instruments

See list of measuring equipment of this test report.

3.7.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.7.4 Test Setup



3.7.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.8 Antenna Requirements

3.8.1 Standard Applicable

§15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.8.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used. The EUT complies with the requirement of 15.203.

3.8.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

For power, the directional gain G_{ANT} is set equal to the antenna having the highest gain, i.e.,

Directional gain = G_{ANT MAX}(Ant.1 Gain, Ant.2 Gain,...) + Array Gain, as following table for Power, where Array Gain = 0 dB (i.e., no array gain) for N_{ANT} ≤ 4;

For PSD, the directional gain calculation is following,

Directional gain = 10 log[(10^{G¹/20} + 10^{G²/20} + ... + 10^{Gⁿ/20})² / N_{ANT}] dBi, as following table for PSD.

N_{ANT} = number of transmit antennas

N_{SS} = number of spatial streams. (The worst case directional gain will occur when N_{SS} = 1)

<CDD Modes>				
			DG for Power (dBi)	DG for PSD (dBi)
	Ant. 5 (dBi)	Ant. 4 (dBi)		
UNII-5	-7.00	-5.00	-5.00	-2.93
UNII-6	-7.00	-6.00	-6.00	-3.48
UNII-7	-7.00	-6.00	-6.00	-3.48
UNII-8	-7.00	-6.00	-6.00	-3.48



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Feb. 25, 2024~ May 07, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2024	Feb. 25, 2024~ May 07, 2024	Jan. 01, 2025	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2024	Feb. 25, 2024~ May 07, 2024	Jan. 01, 2025	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 10, 2023	Mar. 26, 2024	Oct. 09, 2024	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY60242126	10Hz~44GHz	Oct. 10, 2023	Mar. 26, 2024	Oct. 09, 2024	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 10, 2023	Mar. 26, 2024	Oct. 09, 2024	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz~1GHz	Apr. 09, 2023	Mar. 26, 2024	Apr. 08, 2024	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 06, 2023	Mar. 26, 2024	Apr. 05, 2024	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 05, 2024	Mar. 26, 2024	Jan. 04, 2025	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	380827	9KHz ~1GHZ	Jul. 06, 2023	Mar. 26, 2024	Jul. 05, 2024	Radiation (03CH06-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 04, 2024	Mar. 26, 2024	Jan. 03, 2025	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2082395	1Ghz-18Ghz	Jan. 04, 2024	Mar. 26, 2024	Jan. 03, 2025	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270319	500MHz~26.5GHz	Oct. 10, 2023	Mar. 26, 2024	Oct. 09, 2024	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Mar. 26, 2024	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Mar. 26, 2024	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Mar. 26, 2024	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 16, 2023	Mar. 12, 2024	May 15, 2024	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 11, 2023	Mar. 12, 2024	Oct. 10, 2024	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 16, 2023	Mar. 12, 2024	May 15, 2024	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 11, 2023	Mar. 12, 2024	Oct. 10, 2024	Conduction (CO01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Mar. 15, 2024~ Mar. 21, 2024	Oct. 10, 2024	CBP (DFS01-KS)
MXG-B RF Vector Signal Generator	Keysight	5182B /5182BX07	MY56200417 /MY59360210	9kHz~7.2GHz	May 16, 2023	Mar. 15, 2024~ Mar. 21, 2024	May 15, 2024	CBP (DFS01-KS)
Vector Signal Generator	R&S	SMBV100A	258305	9kHz~6GHz	Jan. 02, 2024	Mar. 15, 2024~ Mar. 21, 2024	Jan. 01, 2025	CBP (DFS01-KS)
Combiner	MTJ Cooperation	MTJ7112	N/A	0.4-6GHz	NCR	Mar. 15, 2024~ Mar. 21, 2024	NCR	CBP (DFS01-KS)

NCR: No Calibration Required



5 Measurement Uncertainty

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.26 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.46 dB
Conducted Power Spectral Density	±0.88 dB
Frequency	±0.4 Hz
Conducted Generated signal Levels	±0.56 dB
Conducted Time	0.38%

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.26dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.02dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.26dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

Report Number : FR420701G

Test Engineer:	Jiang Jun	Temperature:	21~25	°C
Test Date:	2024/2/25~2024/3/21	Relative Humidity:	51~54	%

TEST RESULTS DATA
EIRP Power Table

U-NII-5 MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 5	Ant 4	Ant 5	Ant 4	SUM	Ant 5	Ant 4				SUM	Ant 5
11a	6Mbps	2	001	5955	0.03	0.03	9.98	9.74	12.87	-5.00		7.87	24.00	Pass	10.5	
11a	6Mbps	2	002	5935	0.03	0.03	3.85	4.68	7.30	-5.00		2.30	24.00	Pass	0	
11a	6Mbps	2	045	6175	0.03	0.03	9.97	9.33	12.67	-5.00		7.67	24.00	Pass	10	
11a	6Mbps	2	093	6415	0.03	0.03	10.49	9.36	12.97	-5.00		7.97	24.00	Pass	10	

TEST RESULTS DATA
EIRP Power Table

U-NII-6 MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 5	Ant 4	Ant 5	Ant 4	SUM	Ant 5	Ant 4				SUM	Ant 5
11a	6Mbps	2	097	6435	0.03	0.03	10.81	9.77	13.33	-6.00	7.33	24.00	Pass	10.5		
11a	6Mbps	2	105	6475	0.03	0.03	10.83	9.65	13.29	-6.00	7.29	24.00	Pass	10.5		
11a	6Mbps	2	113	6515	0.03	0.03	10.76	9.84	13.33	-6.00	7.33	24.00	Pass	10.5		

TEST RESULTS DATA
EIRP Power Table

U-NII-7 MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 5	Ant 4	Ant 5	Ant 4	SUM	Ant 5	Ant 4				SUM	Ant 5
11a	6Mbps	2	117	6535	0.03	0.03	10.67	9.81	13.27	-6.00		7.27	24.00	Pass		10.5
11a	6Mbps	2	149	6695	0.03	0.03	10.87	10.29	13.60	-6.00		7.60	24.00	Pass		11
11a	6Mbps	2	181	6855	0.03	0.03	11.01	9.69	13.41	-6.00		7.41	24.00	Pass		10.5
11a	6Mbps	2	185	6875	0.03	0.03	10.96	10.60	13.79	-6.00		7.79	24.00	Pass		11.5

TEST RESULTS DATA
EIRP Power Table

U-NII-8 MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 5	Ant 4	Ant 5	Ant 4	SUM	Ant 5	Ant 4				SUM	Ant 5
11a	6Mbps	2	189	6895	0.03	0.03	10.82	10.69	13.77	-6.00		7.77	24.00	Pass	11.5	
11a	6Mbps	2	209	6995	0.03	0.03	9.62	8.85	12.26	-6.00		6.26	24.00	Pass	9.5	
11a	6Mbps	2	229	7095	0.03	0.03	9.69	9.14	12.43	-6.00		6.43	24.00	Pass	10	
11a	6Mbps	2	233	7115	0.03	0.03	6.20	6.62	9.43	-6.00		3.43	24.00	Pass	2	

TEST RESULTS DATA
EIRP Power Table

U-NII-5 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 5	Ant 4	Ant 5	Ant 4	SUM	Ant 5	Ant 4				SUM	Ant 5
HE20	MCS0	2	001	5955	Full	0.00	0.00	10.36	10.48	13.43	-5.00	8.43	24.00	Pass	11		
HE20	MCS0	2	001	5955	26/0	0.00	0.00	0.66	0.98	3.83	-5.00	-1.17	24.00	Pass	-4		
HE20	MCS0	2	001	5955	52/37	0.00	0.00	0.75	2.52	4.73	-5.00	-0.27	24.00	Pass	-0.5		
HE20	MCS0	2	001	5955	106/53	0.00	0.00	6.58	7.14	9.88	-5.00	4.88	24.00	Pass	6.5		
HE20	MCS0	2	002	5935	Full	0.00	0.00	-8.05	-7.91	-4.97	-5.00	-9.97	24.00	Pass	-12.5		
HE20	MCS0	2	002	5935	26/0	0.00	0.00	-16.56	-16.44	-13.49	-5.00	-18.49	24.00	Pass	-22.5		
HE20	MCS0	2	002	5935	52/37	0.00	0.00	-14.59	-14.37	-11.47	-5.00	-16.47	24.00	Pass	-19.5		
HE20	MCS0	2	002	5935	106/53	0.00	0.00	-12.08	-11.75	-8.90	-5.00	-13.90	24.00	Pass	-16.5		
HE20	MCS0	2	045	6175	Full	0.00	0.00	10.53	9.90	13.24	-5.00	8.24	24.00	Pass	10.5		
HE20	MCS0	2	093	6415	Full	0.00	0.00	10.90	10.09	13.52	-5.00	8.52	24.00	Pass	10.5		
HE40	MCS0	2	003	5965	Full	0.00	0.00	13.12	13.24	16.19	-5.00	11.19	24.00	Pass	13.5		
HE40	MCS0	2	043	6165	Full	0.00	0.00	13.18	12.84	16.02	-5.00	11.02	24.00	Pass	13		
HE40	MCS0	2	091	6405	Full	0.00	0.00	13.37	13.23	16.31	-5.00	11.31	24.00	Pass	13.5		
HE80	MCS0	2	007	5985	Full	0.00	0.00	16.36	16.20	19.29	-5.00	14.29	24.00	Pass	16.5		
HE80	MCS0	2	039	6145	Full	0.00	0.00	15.52	15.37	18.46	-5.00	13.46	24.00	Pass	15.5		
HE80	MCS0	2	087	6385	Full	0.00	0.00	16.04	16.02	19.04	-5.00	14.04	24.00	Pass	16		
HE160	MCS0	2	015	6025	Full	0.00	0.00	15.73	15.75	18.75	-5.00	13.75	24.00	Pass	16		
HE160	MCS0	2	047	6185	Full	0.00	0.00	15.90	15.79	18.86	-5.00	13.86	24.00	Pass	16		
HE160	MCS0	2	079	6345	Full	0.00	0.00	15.66	15.35	18.52	-5.00	13.52	24.00	Pass	16		

TEST RESULTS DATA
EIRP Power Table

U-NII-6 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 5	Ant 4	Ant 5	Ant 4	SUM	Ant 5	Ant 4				SUM	Ant 5
HE20	MCS0	2	097	6435	Full	0.00	0.00	11.05	10.59	13.84	-6.00	7.84	24.00	Pass		11	
HE20	MCS0	2	097	6435	26/0	0.00	0.00	1.09	0.63	3.88	-6.00	-2.12	24.00	Pass		-4.5	
HE20	MCS0	2	097	6435	52/37	0.00	0.00	2.43	1.37	4.94	-6.00	-1.06	24.00	Pass		-0.5	
HE20	MCS0	2	097	6435	106/53	0.00	0.00	7.47	7.21	10.35	-6.00	4.35	24.00	Pass		6.5	
HE20	MCS0	2	105	6475	Full	0.00	0.00	11.10	10.57	13.85	-6.00	7.85	24.00	Pass		11	
HE20	MCS0	2	113	6515	Full	0.00	0.00	11.51	10.89	14.22	-6.00	8.22	24.00	Pass		11.5	
HE40	MCS0	2	099	6445	Full	0.00	0.00	13.95	13.23	16.62	-6.00	10.62	24.00	Pass		13.5	
HE40	MCS0	2	107	6485	Full	0.00	0.00	14.47	13.73	17.13	-6.00	11.13	24.00	Pass		14	
HE40	MCS0	2	115	6525	Full	0.00	0.00	13.93	13.33	16.65	-6.00	10.65	24.00	Pass		13.5	
HE80	MCS0	2	103	6465	Full	0.00	0.00	17.18	16.38	19.81	-6.00	13.81	24.00	Pass		16.5	
HE80	MCS0	2	119	6545	Full	0.00	0.00	17.00	16.56	19.80	-6.00	13.80	24.00	Pass		16.5	
HE160	MCS0	2	111	6505	Full	0.00	0.00	15.95	15.39	18.69	-6.00	12.69	24.00	Pass		16	

TEST RESULTS DATA
EIRP Power Table

U-NII-7 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 5	Ant 4	Ant 5	Ant 4	SUM	Ant 5	Ant 4	SUM	Ant 5		Ant 4	
HE20	MCS0	2	117	6535	Full	0.00	0.00	11.54	10.82	14.21	-6.00	8.21	24.00	Pass	11.5		
HE20	MCS0	2	117	6535	26/0	0.00	0.00	1.18	0.56	3.89	-6.00	-2.11	24.00	Pass	-4.5		
HE20	MCS0	2	117	6535	52/37	0.00	0.00	1.76	1.77	4.78	-6.00	-1.22	24.00	Pass	-0.5		
HE20	MCS0	2	117	6535	106/53	0.00	0.00	7.38	6.88	10.15	-6.00	4.15	24.00	Pass	6.5		
HE20	MCS0	2	149	6695	Full	0.00	0.00	11.71	11.00	14.38	-6.00	8.38	24.00	Pass	11.5		
HE20	MCS0	2	181	6855	Full	0.00	0.00	11.58	10.20	13.95	-6.00	7.95	24.00	Pass	11		
HE20	MCS0	2	185	6875	Full	0.00	0.00	11.43	11.03	14.24	-6.00	8.24	24.00	Pass	12		
HE40	MCS0	2	123	6565	Full	0.00	0.00	14.15	13.83	17.00	-6.00	11.00	24.00	Pass	14		
HE40	MCS0	2	147	6685	Full	0.00	0.00	13.88	13.20	16.56	-6.00	10.56	24.00	Pass	13.5		
HE40	MCS0	2	179	6845	Full	0.00	0.00	14.44	13.72	17.11	-6.00	11.11	24.00	Pass	14		
HE40	MCS0	2	187	6885	Full	0.00	0.00	14.10	14.18	17.15	-6.00	11.15	24.00	Pass	14.5		
HE80	MCS0	2	135	6625	Full	0.00	0.00	17.57	16.90	20.26	-6.00	14.26	24.00	Pass	17		
HE80	MCS0	2	151	6705	Full	0.00	0.00	17.54	16.91	20.25	-6.00	14.25	24.00	Pass	17		
HE80	MCS0	2	167	6785	Full	0.00	0.00	17.50	16.75	20.15	-6.00	14.15	24.00	Pass	17		
HE80	MCS0	2	183	6865	Full	0.00	0.00	17.37	17.18	20.29	-6.00	14.29	24.00	Pass	17.5		
HE160	MCS0	2	143	6665	Full	0.00	0.00	15.92	15.49	18.72	-6.00	12.72	24.00	Pass	16		
HE160	MCS0	2	175	6825	Full	0.00	0.00	16.15	15.19	18.71	-6.00	12.71	24.00	Pass	16		

TEST RESULTS DATA
EIRP Power Table

U-NII-8 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 5	Ant 4	Ant 5	Ant 4	SUM	Ant 5	Ant 4				SUM	Ant 5
HE20	MCS0	2	189	6895	Full	0.00	0.00	11.01	10.65	13.84	-6.00	-6.00	7.84	24.00	Pass	11.5	
HE20	MCS0	2	209	6995	Full	0.00	0.00	10.13	9.30	12.75	-6.00	-6.00	6.75	24.00	Pass	10	
HE20	MCS0	2	229	7095	Full	0.00	0.00	10.07	9.67	12.88	-6.00	-6.00	6.88	24.00	Pass	10.5	
HE20	MCS0	2	229	7095	26/8	0.00	0.00	0.64	1.23	3.96	-6.00	-6.00	-2.04	24.00	Pass	-4	
HE20	MCS0	2	229	7095	52/40	0.00	0.00	0.83	1.92	4.42	-6.00	-6.00	-1.58	24.00	Pass	-0.5	
HE20	MCS0	2	229	7095	106/54	0.00	0.00	7.27	7.02	10.16	-6.00	-6.00	4.16	24.00	Pass	6.5	
HE20	MCS0	2	195	7115	Full	0.00	0.00	-6.69	-5.95	-3.29	-6.00	-6.00	-9.29	24.00	Pass	-11	
HE20	MCS0	2	195	7115	26/8	0.00	0.00	-15.57	-15.25	-12.40	-6.00	-6.00	-18.40	24.00	Pass	-21	
HE20	MCS0	2	203	7115	52/40	0.00	0.00	-13.26	-12.68	-9.95	-6.00	-6.00	-15.95	24.00	Pass	-18	
HE20	MCS0	2	203	7115	106/54	0.00	0.00	-11.48	-10.99	-8.22	-6.00	-6.00	-14.22	24.00	Pass	-16	
HE40	MCS0	2	187	6885	Full	0.00	0.00	14.10	14.18	17.15	-6.00	-6.00	11.15	24.00	Pass	14.5	
HE40	MCS0	2	195	6925	Full	0.00	0.00	14.32	14.07	17.21	-6.00	-6.00	11.21	24.00	Pass	14.5	
HE40	MCS0	2	203	6965	Full	0.00	0.00	14.77	14.28	17.54	-6.00	-6.00	11.54	24.00	Pass	14.5	
HE40	MCS0	2	227	7085	Full	0.00	0.00	13.38	12.88	16.15	-6.00	-6.00	10.15	24.00	Pass	13.5	
HE80	MCS0	2	199	6945	Full	0.00	0.00	17.18	16.73	19.97	-6.00	-6.00	13.97	24.00	Pass	17.5	
HE80	MCS0	2	215	7025	Full	0.00	0.00	15.17	14.87	18.03	-6.00	-6.00	12.03	24.00	Pass	15	
HE160	MCS0	2	207	6985	Full	0.00	0.00	15.94	15.54	18.75	-6.00	-6.00	12.75	24.00	Pass	16	

TEST RESULTS DATA
EIRP Power Table

U-NII-5 MIMO																	
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 5	Ant 4	Ant 5	Ant 4	SUM	Ant 5	Ant 4				SUM	Ant 5
EHT20	MCS0	2	001	5955	Full	0.00	0.00	10.38	10.53	13.47	-5.00	8.47	24.00	Pass	11		
EHT20	MCS0	2	001	5955	26/0	0.00	0.00	0.72	1.04	3.89	-5.00	-1.11	24.00	Pass	-4		
EHT20	MCS0	2	001	5955	52/37	0.00	0.00	1.82	2.56	5.22	-5.00	0.22	24.00	Pass	-0.5		
EHT20	MCS0	2	001	5955	106/53	0.00	0.00	6.63	7.19	9.93	-5.00	4.93	24.00	Pass	6.5		
EHT20	MCS0	2	045	5955	52ru+26ru	0.00	0.00	1.79	2.48	5.16	-5.00	0.16	24.00	Pass	-0.5		
EHT20	MCS0	2	045	5955	106ru+26ru	0.00	0.00	6.47	7.14	9.83	-5.00	4.83	24.00	Pass	6.5		
EHT20	MCS0	2	002	5935	Full	0.00	0.00	-8.03	-7.89	-4.95	-5.00	-9.95	24.00	Pass	-12.5		
EHT20	MCS0	2	002	5935	26/0	0.00	0.00	-16.54	-16.39	-13.45	-5.00	-18.45	24.00	Pass	-22.5		
EHT20	MCS0	2	002	5935	52/37	0.00	0.00	-14.53	-14.31	-11.41	-5.00	-16.41	24.00	Pass	-19.5		
EHT20	MCS0	2	002	5935	106/53	0.00	0.00	-12.02	-11.72	-8.86	-5.00	-13.86	24.00	Pass	-16.5		
EHT20	MCS0	2	002	5935	52ru+26ru	0.00	0.00	-14.65	-14.39	-11.51	-5.00	-16.51	24.00	Pass	-19.5		
EHT20	MCS0	2	002	5935	106ru+26ru	0.00	0.00	-12.07	-11.75	-8.90	-5.00	-13.90	24.00	Pass	-16.5		
EHT20	MCS0	2	045	6175	Full	0.00	0.00	10.57	9.94	13.28	-5.00	8.28	24.00	Pass	10.5		
EHT20	MCS0	2	093	6415	Full	0.00	0.00	10.95	10.14	13.57	-5.00	8.57	24.00	Pass	10.5		
EHT40	MCS0	2	003	5965	Full	0.00	0.00	13.15	13.28	16.23	-5.00	11.23	24.00	Pass	13.5		
EHT40	MCS0	2	043	6165	Full	0.00	0.00	13.22	12.89	16.07	-5.00	11.07	24.00	Pass	13		
EHT40	MCS0	2	091	6405	Full	0.00	0.00	13.42	13.29	16.37	-5.00	11.37	24.00	Pass	13.5		
EHT80	MCS0	2	007	5985	Full	0.00	0.00	16.43	16.23	19.34	-5.00	14.34	24.00	Pass	16.5		
EHT80	MCS0	2	007	5985	Puncturing 20M ⁴	0.07	0.07	14.53	14.90	17.73	-5.00	12.73	24.00	Pass	14.5		
EHT80	MCS0	2	007	5985	Large RU 484+242 ⁴	0.08	0.08	14.17	14.57	17.38	-5.00	12.38	24.00	Pass	13		
EHT80	MCS0	2	039	6145	Full	0.00	0.00	15.57	15.42	18.51	-5.00	13.51	24.00	Pass	15.5		
EHT80	MCS0	2	087	6385	Full	0.00	0.00	16.07	16.08	19.09	-5.00	14.09	24.00	Pass	16		
EHT160	MCS0	2	015	6025	Full	0.00	0.00	15.75	15.77	18.77	-5.00	13.77	24.00	Pass	16		
EHT160	MCS0	2	015	6025	Puncturing 20M ⁸	0.08	0.11	15.00	14.99	18.01	-5.00	13.01	24.00	Pass	14.5		
EHT160	MCS0	2	015	6025	Puncturing 40M ⁴	0.10	0.10	14.56	14.61	17.60	-5.00	12.60	24.00	Pass	14		
EHT160	MCS0	2	015	6025	Large RU 996+484 ⁴	0.09	0.09	14.23	14.18	17.22	-5.00	12.22	24.00	Pass	12.5		
EHT160	MCS0	2	047	6185	Full	0.00	0.00	15.93	15.82	18.89	-5.00	13.89	24.00	Pass	16		
EHT160	MCS0	2	079	6345	Full	0.00	0.00	15.68	15.38	18.54	-5.00	13.54	24.00	Pass	16		
EHT320	MCS0	2	31	6105	Full	0.09	0.09	15.33	15.43	18.39	-5.00	13.39	24.00	Pass	15		
EHT320	MCS0	2	31	6105	Puncturing 40M ⁸	0.11	0.11	14.59	14.42	17.52	-5.00	12.52	24.00	Pass	14		
EHT320	MCS0	2	31	6105	Puncturing 80M ⁴	0.12	0.12	14.15	13.86	17.02	-5.00	12.02	24.00	Pass	13.5		
EHT320	MCS0	2	31	6105	Puncturing 80+40M ³	0.12	0.12	13.27	13.00	16.14	-5.00	11.14	24.00	Pass	12.5		
EHT320	MCS0	2	31	6105	Large RU 3*996+484 ⁸	0.17	0.17	12.29	12.06	15.19	-5.00	10.19	24.00	Pass	11		
EHT320	MCS0	2	31	6105	Large RU 3*996 ⁴	0.16	0.16	12.77	12.64	15.71	-5.00	10.71	24.00	Pass	11		
EHT320	MCS0	2	31	6105	Large RU 2*996+484 ³	0.13	0.13	13.75	13.49	16.64	-5.00	11.64	24.00	Pass	11		
EHT320	MCS0	2	63	6265	Full	0.09	0.09	15.44	15.45	18.46	-5.00	13.46	24.00	Pass	15		
EHT320	MCS0	2	95	6425	Full	0.09	0.09	15.75	15.33	18.56	-5.00	13.56	24.00	Pass	15		

TEST RESULTS DATA
EIRP Power Table

U-NII-6 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 5	Ant 4	Ant 5	Ant 4	SUM	Ant 5	Ant 4				SUM	Ant 5
EHT20	MCS0	2	097	6435	Full	0.00	0.00	11.08	10.65	13.88	-6.00	-6.00	7.88	24.00	Pass	11	
EHT20	MCS0	2	097	6435	26/0	0.00	0.00	1.12	0.65	3.90	-6.00	-6.00	-2.10	24.00	Pass	-4.5	
EHT20	MCS0	2	097	6435	52/37	0.00	0.00	2.47	1.43	4.99	-6.00	-6.00	-1.01	24.00	Pass	-0.5	
EHT20	MCS0	2	097	6435	106/53	0.00	0.00	7.52	7.28	10.41	-6.00	-6.00	4.41	24.00	Pass	6.5	
EHT20	MCS0	2	097	6435	52ru+26ru	0.00	0.00	2.35	1.32	4.88	-6.00	-6.00	-1.12	24.00	Pass	-0.5	
EHT20	MCS0	2	097	6435	106ru+26ru	0.00	0.00	7.48	7.17	10.34	-6.00	-6.00	4.34	24.00	Pass	6.5	
EHT20	MCS0	2	105	6475	Full	0.00	0.00	11.14	10.60	13.89	-6.00	-6.00	7.89	24.00	Pass	11	
EHT20	MCS0	2	113	6515	Full	0.00	0.00	11.54	10.94	14.26	-6.00	-6.00	8.26	24.00	Pass	11.5	
EHT40	MCS0	2	099	6445	Full	0.00	0.00	14.01	13.27	16.67	-6.00	-6.00	10.67	24.00	Pass	13.5	
EHT40	MCS0	2	107	6485	Full	0.00	0.00	14.54	13.78	17.19	-6.00	-6.00	11.19	24.00	Pass	14	
EHT40	MCS0	2	115	6525	Full	0.00	0.00	13.98	13.36	16.69	-6.00	-6.00	10.69	24.00	Pass	13.5	
EHT80	MCS0	2	103	6465	Full	0.00	0.00	17.22	16.42	19.85	-6.00	-6.00	13.85	24.00	Pass	16.5	
EHT80	MCS0	2	119	6545	Full	0.00	0.00	17.06	16.58	19.84	-6.00	-6.00	13.84	24.00	Pass	16.5	
EHT160	MCS0	2	111	6505	Full	0.00	0.00	15.98	15.41	18.71	-6.00	-6.00	12.71	24.00	Pass	16	
EHT320	MCS0	2	127	6585	Full	0.09	0.09	15.77	15.26	18.54	-6.00	-6.00	12.54	24.00	Pass	15	

TEST RESULTS DATA
EIRP Power Table

U-NII-7 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 5	Ant 4	Ant 5	Ant 4	SUM	Ant 5	Ant 4	SUM	Ant 5		Ant 4	
EHT20	MCS0	2	117	6535	Full	0.00	0.00	11.58	10.87	14.25	-6.00	8.25	24.00	Pass	11.5		
EHT20	MCS0	2	117	6535	26/0	0.00	0.00	1.21	0.62	3.94	-6.00	-2.06	24.00	Pass	-4.5		
EHT20	MCS0	2	117	6535	52/37	0.00	0.00	1.82	1.82	4.83	-6.00	-1.17	24.00	Pass	-0.5		
EHT20	MCS0	2	117	6535	106/53	0.00	0.00	7.43	6.94	10.20	-6.00	4.20	24.00	Pass	6.5		
EHT20	MCS0	2	117	6535	52ru+26ru	0.00	0.00	1.73	1.74	4.75	-6.00	-1.25	24.00	Pass	-0.5		
EHT20	MCS0	2	117	6535	106ru+26ru	0.00	0.00	7.36	6.87	10.13	-6.00	4.13	24.00	Pass	6.5		
EHT20	MCS0	2	149	6695	Full	0.00	0.00	11.76	11.04	14.43	-6.00	8.43	24.00	Pass	11.5		
EHT20	MCS0	2	181	6855	Full	0.00	0.00	11.64	10.23	14.00	-6.00	8.00	24.00	Pass	11		
EHT20	MCS0	2	185	6875	Full	0.00	0.00	11.45	11.08	14.28	-6.00	8.28	24.00	Pass	12		
EHT40	MCS0	2	123	6565	Full	0.00	0.00	14.18	13.87	17.04	-6.00	11.04	24.00	Pass	14		
EHT40	MCS0	2	147	6685	Full	0.00	0.00	13.92	13.25	16.61	-6.00	10.61	24.00	Pass	13.5		
EHT40	MCS0	2	179	6845	Full	0.00	0.00	14.46	13.78	17.14	-6.00	11.14	24.00	Pass	14		
EHT40	MCS0	2	187	6885	Full	0.00	0.00	14.15	14.22	17.20	-6.00	11.20	24.00	Pass	14.5		
EHT80	MCS0	2	135	6625	Full	0.00	0.00	17.62	16.95	20.31	-6.00	14.31	24.00	Pass	17		
EHT80	MCS0	2	151	6705	Full	0.00	0.00	17.56	16.97	20.29	-6.00	14.29	24.00	Pass	17		
EHT80	MCS0	2	167	6785	Full	0.00	0.00	17.53	16.78	20.18	-6.00	14.18	24.00	Pass	17		
EHT80	MCS0	2	183	6865	Full	0.00	0.00	17.41	17.23	20.33	-6.00	14.33	24.00	Pass	17.5		
EHT160	MCS0	2	143	6665	Full	0.00	0.00	15.95	15.52	18.75	-6.00	12.75	24.00	Pass	16		
EHT160	MCS0	2	175	6825	Full	0.00	0.00	16.17	15.20	18.72	-6.00	12.72	24.00	Pass	16		
EHT320	MCS0	2	159	6745	Full	0.00	0.00	15.92	15.14	18.56	-6.00	12.56	24.00	Pass	15		

TEST RESULTS DATA
EIRP Power Table

U-NII-8 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 5	Ant 4	Ant 5	Ant 4	SUM	Ant 5	Ant 4				SUM	Ant 5
EHT20	MCS0	2	189	6895	Full	0.00	0.00	11.04	10.68	13.87	-6.00	7.87	24.00	Pass		11.5	
EHT20	MCS0	2	209	6995	Full	0.00	0.00	10.18	9.35	12.80	-6.00	6.80	24.00	Pass		10	
EHT20	MCS0	2	229	7095	Full	0.00	0.00	10.11	9.73	12.93	-6.00	6.93	24.00	Pass		10.5	
EHT20	MCS0	2	229	7095	26/8	0.00	0.00	0.67	1.27	3.99	-6.00	-2.01	24.00	Pass		-4	
EHT20	MCS0	2	229	7095	52/40	0.00	0.00	0.85	1.97	4.46	-6.00	-1.54	24.00	Pass		-0.5	
EHT20	MCS0	2	229	7095	106/54	0.00	0.00	7.31	7.06	10.20	-6.00	4.20	24.00	Pass		6.5	
EHT20	MCS0	2	229	7095	52ru+26ru	0.00	0.00	0.67	1.91	4.34	-6.00	-1.66	24.00	Pass		-0.5	
EHT20	MCS0	2	229	7095	106ru+26ru	0.00	0.00	7.28	7.02	10.16	-6.00	4.16	24.00	Pass		6.5	
EHT20	MCS0	2	233	7115	Full	0.00	0.00	-6.62	-5.91	-3.24	-6.00	-9.24	24.00	Pass		-11	
EHT20	MCS0	2	233	7115	26/8	0.00	0.00	-15.53	-15.22	-12.36	-6.00	-18.36	24.00	Pass		-21	
EHT20	MCS0	2	233	7115	52/40	0.00	0.00	-13.18	-12.64	-9.89	-6.00	-15.89	24.00	Pass		-18	
EHT20	MCS0	2	233	7115	106/54	0.00	0.00	-11.48	-10.95	-8.19	-6.00	-14.19	24.00	Pass		-16	
EHT20	MCS0	2	233	7115	52ru+26ru	0.00	0.00	-13.21	-12.87	-10.03	-6.00	-16.03	24.00	Pass		-18	
EHT20	MCS0	2	233	7115	106ru+26ru	0.00	0.00	-11.48	-10.99	-8.22	-6.00	-14.22	24.00	Pass		-16	
EHT40	MCS0	2	195	6925	Full	0.00	0.00	14.39	14.09	17.25	-6.00	11.25	24.00	Pass		14.5	
EHT40	MCS0	2	203	6965	Full	0.00	0.00	14.82	14.31	17.58	-6.00	11.58	24.00	Pass		14.5	
EHT40	MCS0	2	227	7085	Full	0.00	0.00	13.41	12.92	16.18	-6.00	10.18	24.00	Pass		13.5	
EHT80	MCS0	2	199	6945	Full	0.00	0.00	17.20	16.74	19.99	-6.00	13.99	24.00	Pass		17.5	
EHT80	MCS0	2	215	7025	Full	0.00	0.00	15.21	14.90	18.07	-6.00	12.07	24.00	Pass		15	
EHT80	MCS0	2	215	7025	Puncturing 20M ①	0.07	0.07	14.34	13.85	17.11	-6.00	11.11	24.00	Pass		13.5	
EHT80	MCS0	2	215	7025	Large RU 484+242 ②	0.08	0.08	14.70	14.09	17.41	-6.00	11.41	24.00	Pass		12.5	
EHT160	MCS0	2	207	6985	Full	0.00	0.00	15.96	15.58	18.78	-6.00	12.78	24.00	Pass		16	
EHT160	MCS0	2	207	6985	Puncturing 20M ①	0.08	0.11	15.33	14.79	18.08	-6.00	12.08	24.00	Pass		14.5	
EHT160	MCS0	2	207	6985	Puncturing 40M ①	0.11	0.10	14.97	14.35	17.68	-6.00	11.68	24.00	Pass		14	
EHT160	MCS0	2	207	6985	Large RU 996+484 ③	0.10	0.09	14.56	14.10	17.35	-6.00	11.35	24.00	Pass		12.5	
EHT320	MCS0	2	191	6905	Full	0.09	0.09	15.78	15.13	18.48	-6.00	12.48	24.00	Pass		15	
EHT320	MCS0	2	191	6905	Puncturing 40M ①	0.11	0.11	15.13	14.67	17.92	-6.00	11.92	24.00	Pass		14.5	
EHT320	MCS0	2	191	6905	Puncturing 80M ①	0.12	0.12	14.49	14.11	17.32	-6.00	11.32	24.00	Pass		14	
EHT320	MCS0	2	191	6905	Puncturing 80+40M ⑧	0.12	0.12	13.26	13.24	16.26	-6.00	10.26	24.00	Pass		13	
EHT320	MCS0	2	191	6905	Large RU 3*996+484 ⑤	0.17	0.17	12.09	11.61	14.87	-6.00	8.87	24.00	Pass		11	
EHT320	MCS0	2	191	6905	Large RU 3*996 ④	0.16	0.16	12.58	12.13	15.37	-6.00	9.37	24.00	Pass		11	
EHT320	MCS0	2	191	6905	Large RU 2*996+484 ⑥	0.13	0.13	13.64	13.06	16.37	-6.00	10.37	24.00	Pass		11	



Emission Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	26dB EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict	
11A-CDD	Ant5	5935	23.20	5923.32	5946.52	≤320	PASS	
	Ant4	5935	23.28	5923.68	5946.96	≤320	PASS	
	Ant5	5955	23.44	5943.24	5966.68	≤320	PASS	
	Ant4	5955	22.84	5943.72	5966.56	≤320	PASS	
	Ant5	6175	23.32	6163.24	6186.56	≤320	PASS	
	Ant4	6175	23.00	6163.68	6186.68	≤320	PASS	
	Ant5	6415	23.40	6403.24	6426.64	≤320	PASS	
	Ant4	6415	23.40	6403.52	6426.92	≤320	PASS	
	Ant5	6435	23.24	6423.28	6446.52	≤320	PASS	
	Ant4	6435	23.20	6423.44	6446.64	≤320	PASS	
	Ant5	6475	23.36	6463.28	6486.64	≤320	PASS	
	Ant4	6475	22.64	6463.72	6486.36	≤320	PASS	
	Ant5	6515	23.28	6503.24	6526.52	≤320	PASS	
	Ant4	6515	22.72	6503.68	6526.40	≤320	PASS	
	Ant5	6535	23.32	6523.24	6546.56	≤320	PASS	
	Ant4	6535	23.44	6523.52	6546.96	≤320	PASS	
	Ant5	6695	23.20	6683.32	6706.52	≤320	PASS	
	Ant4	6695	22.96	6683.68	6706.64	≤320	PASS	
	Ant5	6855	23.08	6843.16	6866.24	≤320	PASS	
	Ant4	6855	23.08	6843.60	6866.68	≤320	PASS	
	Ant5	6875	23.24	6863.28	6886.52	≤320	PASS	
	Ant4	6875	22.84	6863.52	6886.36	≤320	PASS	
	Ant5	6895	23.28	6883.28	6906.56	≤320	PASS	
	Ant4	6895	22.64	6883.68	6906.32	≤320	PASS	
	Ant5	6995	22.64	6983.80	7006.44	≤320	PASS	
	Ant4	6995	22.60	6983.92	7006.52	≤320	PASS	
	Ant5	7095	23.32	7083.24	7106.56	≤320	PASS	
	Ant4	7095	22.64	7083.72	7106.36	≤320	PASS	
	Ant5	7115	23.36	7103.32	7126.68	≤320	PASS	
	Ant4	7115	23.24	7103.68	7126.92	≤320	PASS	
	11BE20MIMO	Ant5	5935	23.52	5923.20	5946.72	≤320	PASS
		Ant4	5935	23.40	5923.36	5946.76	≤320	PASS
Ant5		5955	23.36	5943.36	5966.72	≤320	PASS	
Ant4		5955	23.56	5943.32	5966.88	≤320	PASS	
Ant5		6175	23.24	6163.36	6186.60	≤320	PASS	
Ant4		6175	23.16	6163.60	6186.76	≤320	PASS	
Ant5		6415	23.48	6403.28	6426.76	≤320	PASS	
Ant4		6415	23.96	6402.96	6426.92	≤320	PASS	
Ant5		6435	23.40	6423.36	6446.76	≤320	PASS	
Ant4		6435	23.32	6423.48	6446.80	≤320	PASS	
Ant5		6475	23.04	6463.56	6486.60	≤320	PASS	
Ant4		6475	23.48	6463.24	6486.72	≤320	PASS	
Ant5		6515	23.28	6503.56	6526.84	≤320	PASS	



	Ant4	6515	23.36	6503.56	6526.92	≤320	PASS
	Ant5	6535	22.88	6523.60	6546.48	≤320	PASS
	Ant4	6535	23.56	6523.32	6546.88	≤320	PASS
	Ant5	6695	23.36	6683.20	6706.56	≤320	PASS
	Ant4	6695	23.68	6683.44	6707.12	≤320	PASS
	Ant5	6855	23.84	6843.16	6867.00	≤320	PASS
	Ant4	6855	23.24	6843.36	6866.60	≤320	PASS
	Ant5	6875	23.28	6863.32	6886.60	≤320	PASS
	Ant4	6875	23.32	6863.40	6886.72	≤320	PASS
	Ant5	6895	22.88	6883.52	6906.40	≤320	PASS
	Ant4	6895	23.52	6883.36	6906.88	≤320	PASS
	Ant5	6995	22.72	6983.92	7006.64	≤320	PASS
	Ant4	6995	23.20	6983.56	7006.76	≤320	PASS
	Ant5	7095	23.36	7083.40	7106.76	≤320	PASS
	Ant4	7095	23.68	7083.12	7106.80	≤320	PASS
	Ant5	7115	23.64	7103.04	7126.68	≤320	PASS
Ant4	7115	23.40	7103.40	7126.80	≤320	PASS	
11BE40MIMO	Ant5	5965	45.36	5942.12	5987.48	≤320	PASS
	Ant4	5965	44.88	5942.44	5987.32	≤320	PASS
	Ant5	6165	44.96	6142.20	6187.16	≤320	PASS
	Ant4	6165	45.12	6142.68	6187.80	≤320	PASS
	Ant5	6405	44.80	6382.28	6427.08	≤320	PASS
	Ant4	6405	44.56	6382.84	6427.40	≤320	PASS
	Ant5	6445	44.40	6422.52	6466.92	≤320	PASS
	Ant4	6445	44.24	6422.84	6467.08	≤320	PASS
	Ant5	6485	44.80	6462.76	6507.56	≤320	PASS
	Ant4	6485	44.64	6462.68	6507.32	≤320	PASS
	Ant5	6525	44.56	6502.60	6547.16	≤320	PASS
	Ant4	6525	44.16	6502.84	6547.00	≤320	PASS
	Ant5	6565	45.52	6542.36	6587.88	≤320	PASS
	Ant4	6565	46.24	6542.04	6588.28	≤320	PASS
	Ant5	6685	44.88	6662.44	6707.32	≤320	PASS
	Ant4	6685	45.20	6662.52	6707.72	≤320	PASS
	Ant5	6845	44.00	6823.00	6867.00	≤320	PASS
	Ant4	6845	44.80	6822.92	6867.72	≤320	PASS
	Ant5	6885	45.04	6862.92	6907.96	≤320	PASS
	Ant4	6885	44.96	6862.84	6907.80	≤320	PASS
	Ant5	6925	44.24	6902.84	6947.08	≤320	PASS
	Ant4	6925	44.72	6902.52	6947.24	≤320	PASS
	Ant5	6965	45.12	6942.84	6987.96	≤320	PASS
	Ant4	6965	44.80	6942.92	6987.72	≤320	PASS
11BE80MIMO	Ant5	7085	44.88	7062.28	7107.16	≤320	PASS
	Ant4	7085	44.72	7062.84	7107.56	≤320	PASS
	Ant5	5985	90.88	5939.72	6030.60	≤320	PASS
	Ant4	5985	87.84	5940.84	6028.68	≤320	PASS
	Ant5	6145	88.48	6100.20	6188.68	≤320	PASS
	Ant4	6145	89.12	6100.68	6189.80	≤320	PASS
	Ant5	6385	88.96	6340.36	6429.32	≤320	PASS
	Ant4	6385	88.80	6341.16	6429.96	≤320	PASS
	Ant5	6465	88.80	6420.20	6509.00	≤320	PASS





	Ant4	6465	88.48	6420.52	6509.00	≤320	PASS
	Ant5	6545	88.96	6500.36	6589.32	≤320	PASS
	Ant4	6545	88.80	6500.20	6589.00	≤320	PASS
	Ant5	6625	90.40	6579.40	6669.80	≤320	PASS
	Ant4	6625	88.16	6581.32	6669.48	≤320	PASS
	Ant5	6705	88.64	6660.68	6749.32	≤320	PASS
	Ant4	6705	88.96	6660.52	6749.48	≤320	PASS
	Ant5	6785	89.60	6740.04	6829.64	≤320	PASS
	Ant4	6785	88.64	6740.36	6829.00	≤320	PASS
	Ant5	6865	89.12	6820.20	6909.32	≤320	PASS
	Ant4	6865	88.16	6820.68	6908.84	≤320	PASS
	Ant5	6945	88.64	6901.00	6989.64	≤320	PASS
	Ant4	6945	87.68	6900.68	6988.36	≤320	PASS
	Ant5	7025	85.76	6982.76	7068.52	≤320	PASS
Ant4	7025	87.04	6981.96	7069.00	≤320	PASS	
11BE160MIMO	Ant5	6025	176.96	5937.00	6113.96	≤320	PASS
	Ant4	6025	172.80	5939.24	6112.04	≤320	PASS
	Ant5	6185	175.36	6097.64	6273.00	≤320	PASS
	Ant4	6185	173.12	6098.28	6271.40	≤320	PASS
	Ant5	6345	176.96	6256.36	6433.32	≤320	PASS
	Ant4	6345	174.08	6258.28	6432.36	≤320	PASS
	Ant5	6505	177.28	6416.68	6593.96	≤320	PASS
	Ant4	6505	172.80	6418.60	6591.40	≤320	PASS
	Ant5	6665	176.64	6577.64	6754.28	≤320	PASS
	Ant4	6665	172.80	6577.64	6750.44	≤320	PASS
	Ant5	6825	173.44	6739.56	6913.00	≤320	PASS
	Ant4	6825	174.08	6737.96	6912.04	≤320	PASS
	Ant5	6985	171.52	6900.52	7072.04	≤320	PASS
	Ant4	6985	170.56	6900.20	7070.76	≤320	PASS
11BE320MIMO	Ant5	6105	337.28	5935.40	6272.68	-	-
	Ant4	6105	337.28	5936.04	6273.32	-	-
	Ant5	6265	338.56	6094.76	6433.32	-	-
	Ant4	6265	336.00	6096.68	6432.68	-	-
	Ant5	6425	340.48	6252.84	6593.32	-	-
	Ant4	6425	336.64	6257.32	6593.96	-	-
	Ant5	6585	337.92	6416.04	6753.96	-	-
	Ant4	6585	334.08	6417.96	6752.04	-	-
	Ant5	6745	337.92	6576.04	6913.96	-	-
	Ant4	6745	334.08	6577.96	6912.04	-	-
	Ant5	6905	339.20	6736.68	7075.88	-	-
	Ant4	6905	336.00	6737.32	7073.32	-	-


Note: For channels with a nominal bandwidth of 320 MHz, compliance is demonstrated by way of the 99% BW.





Test Graphs

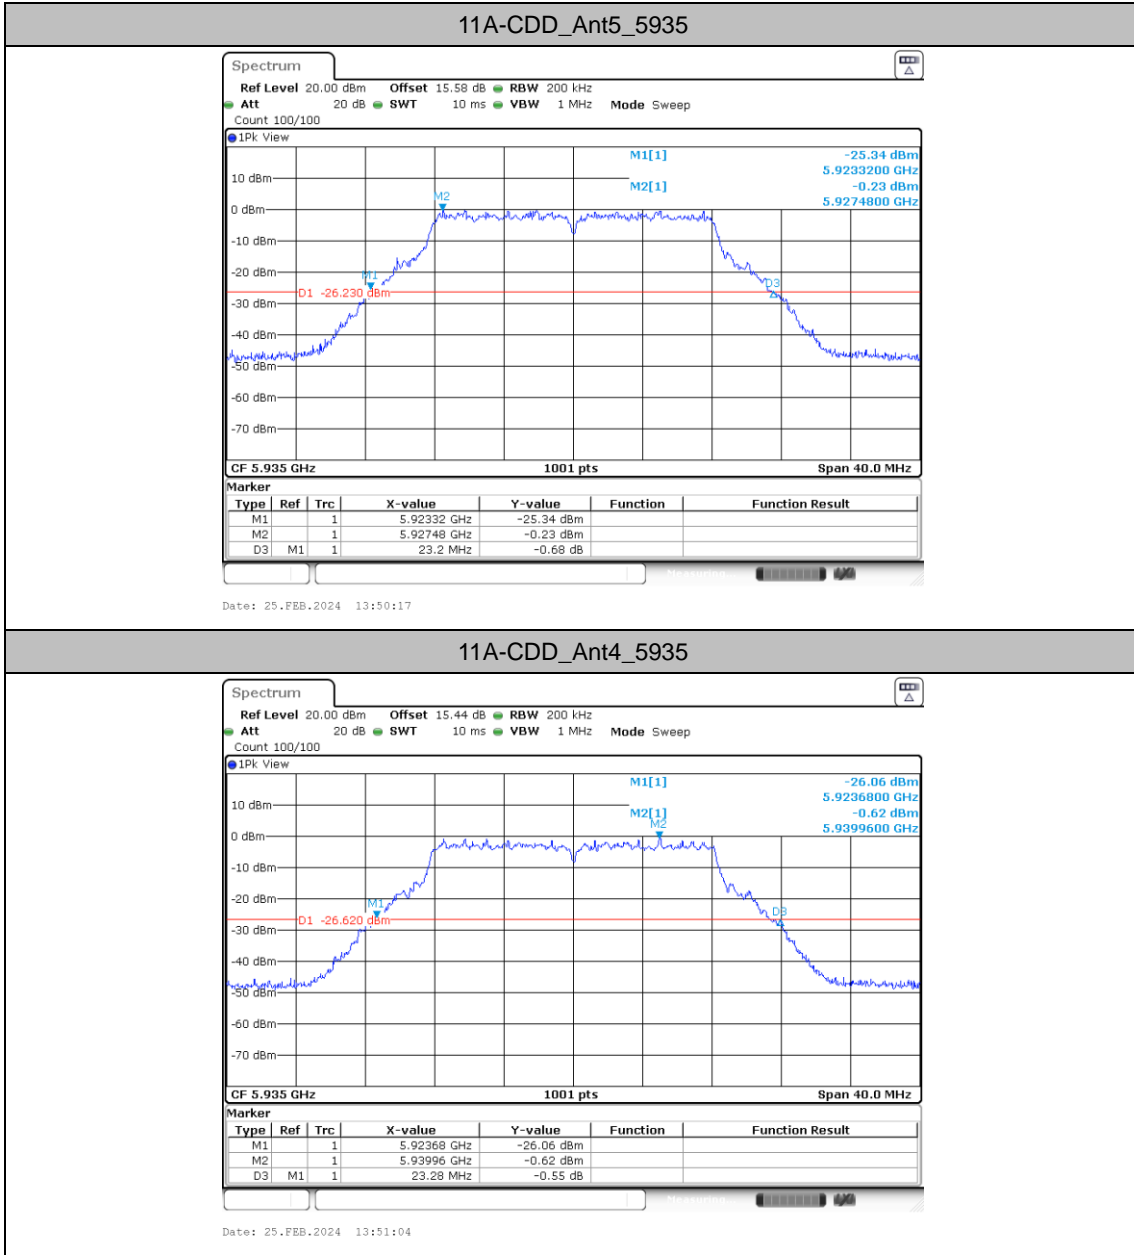


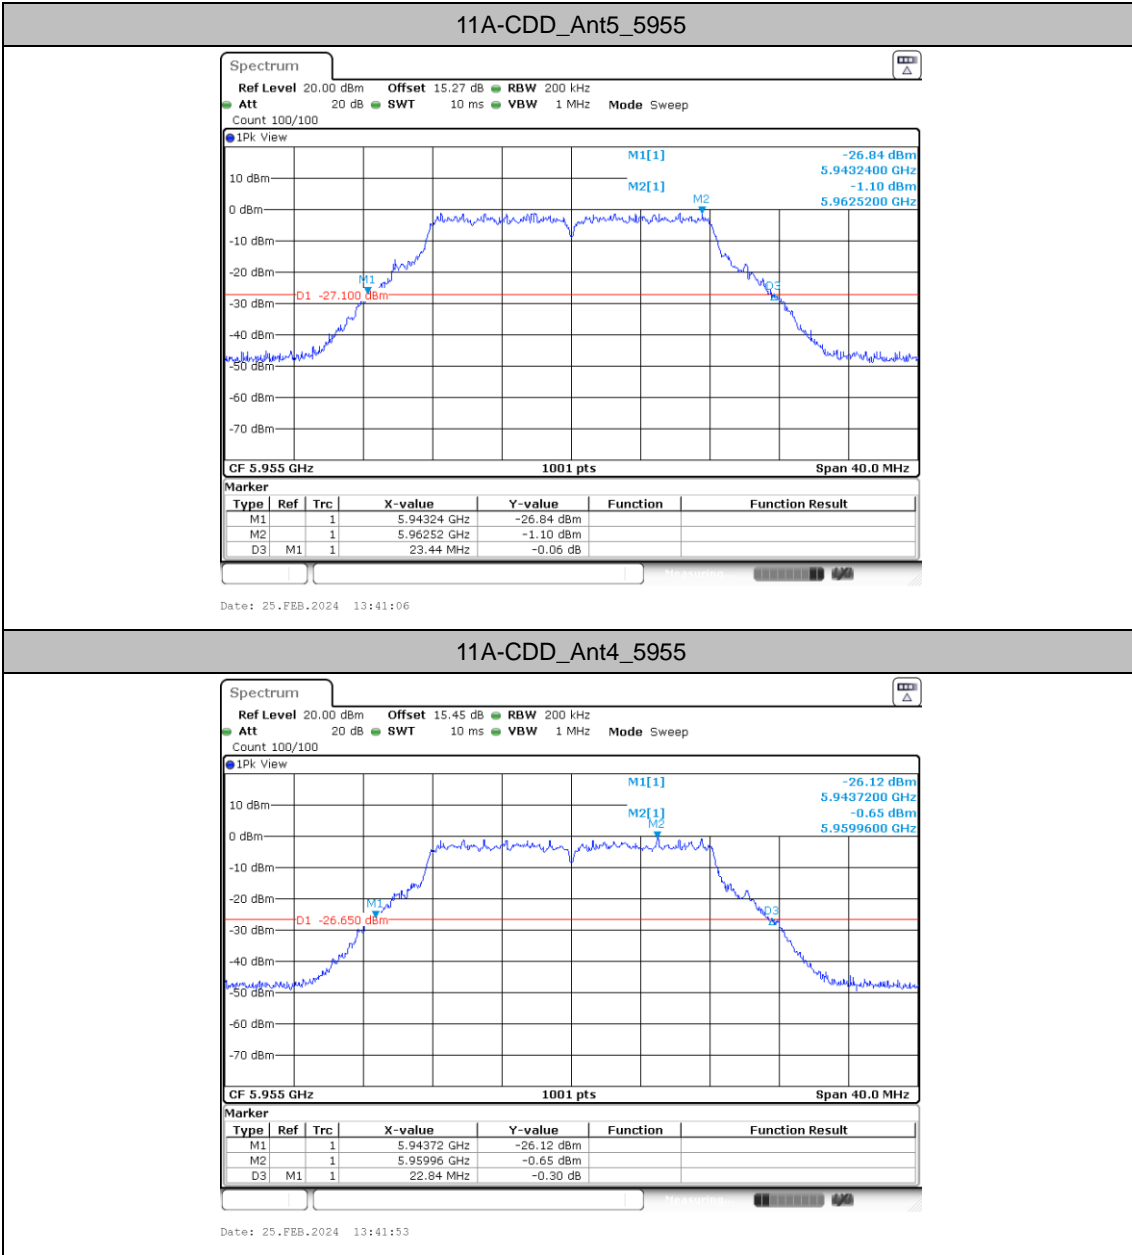


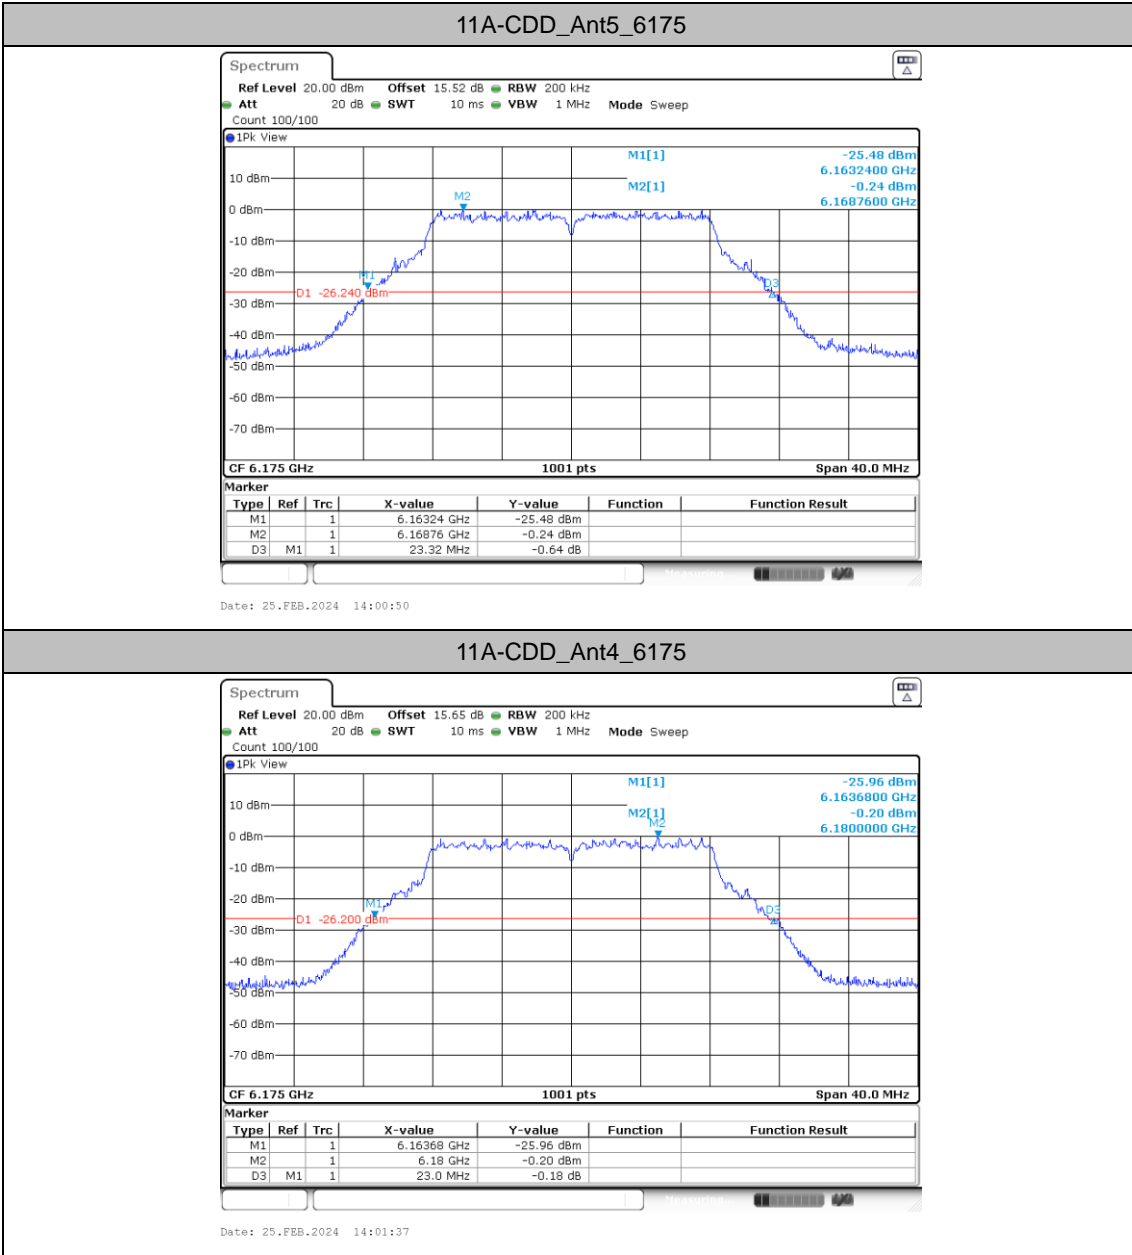


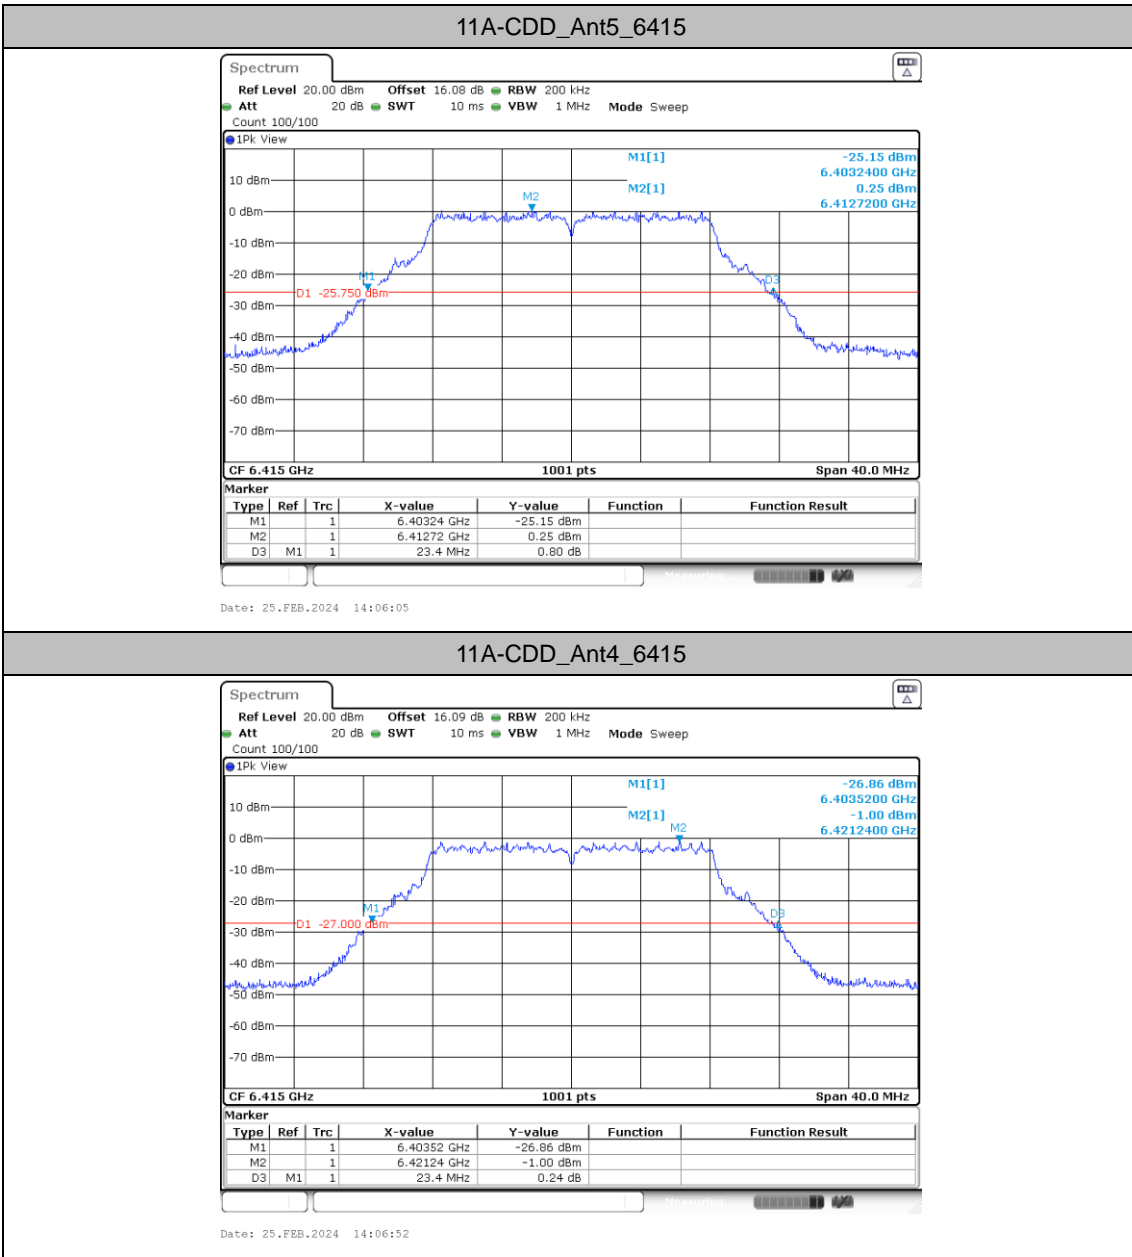


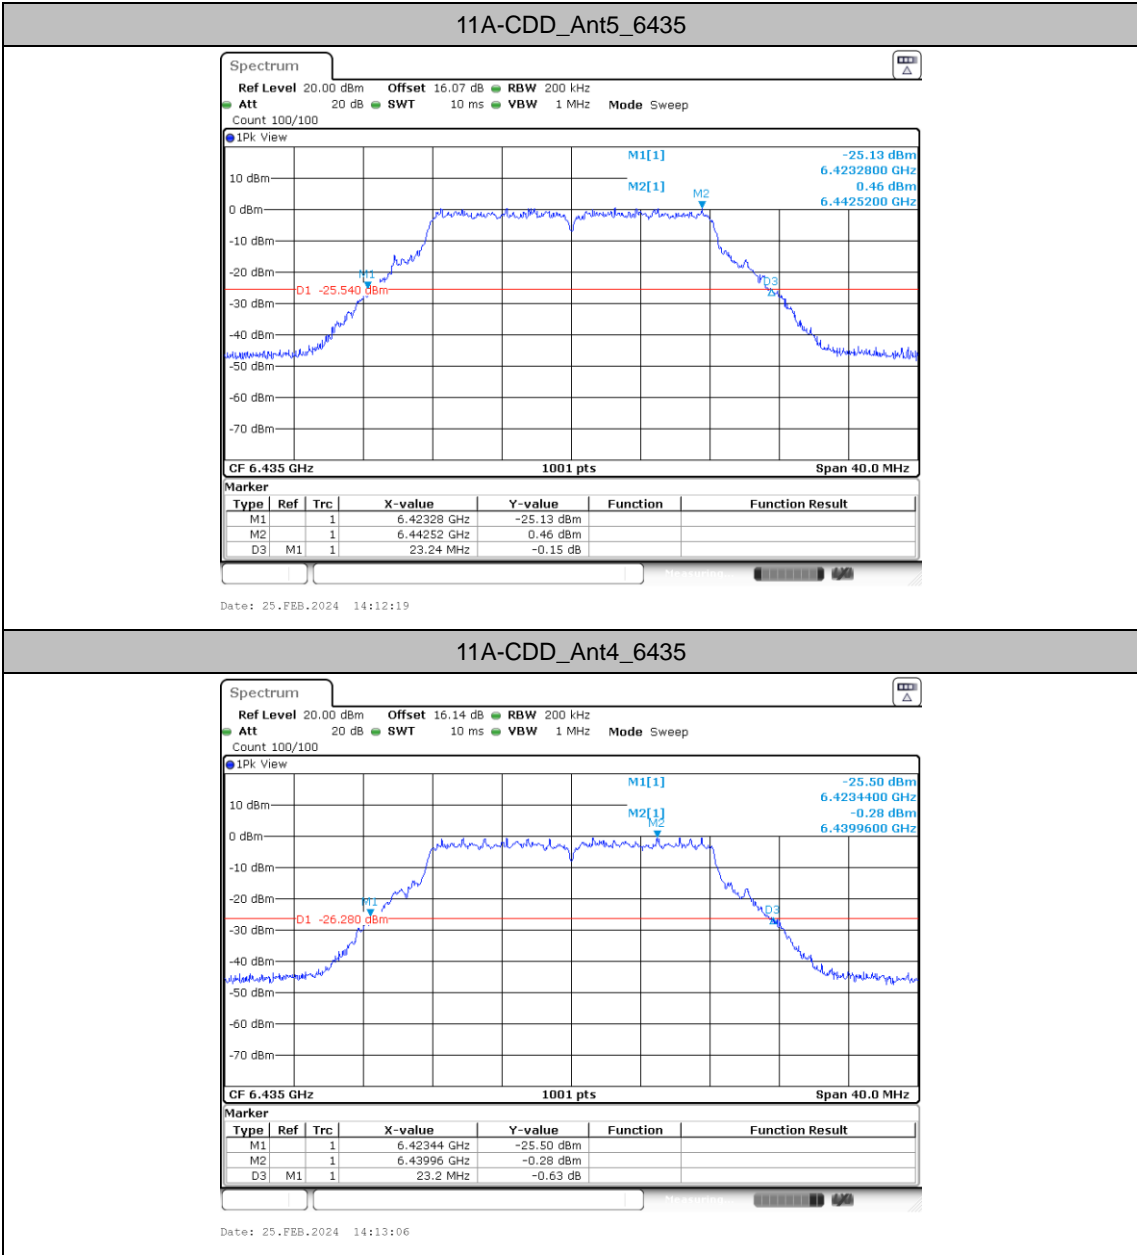


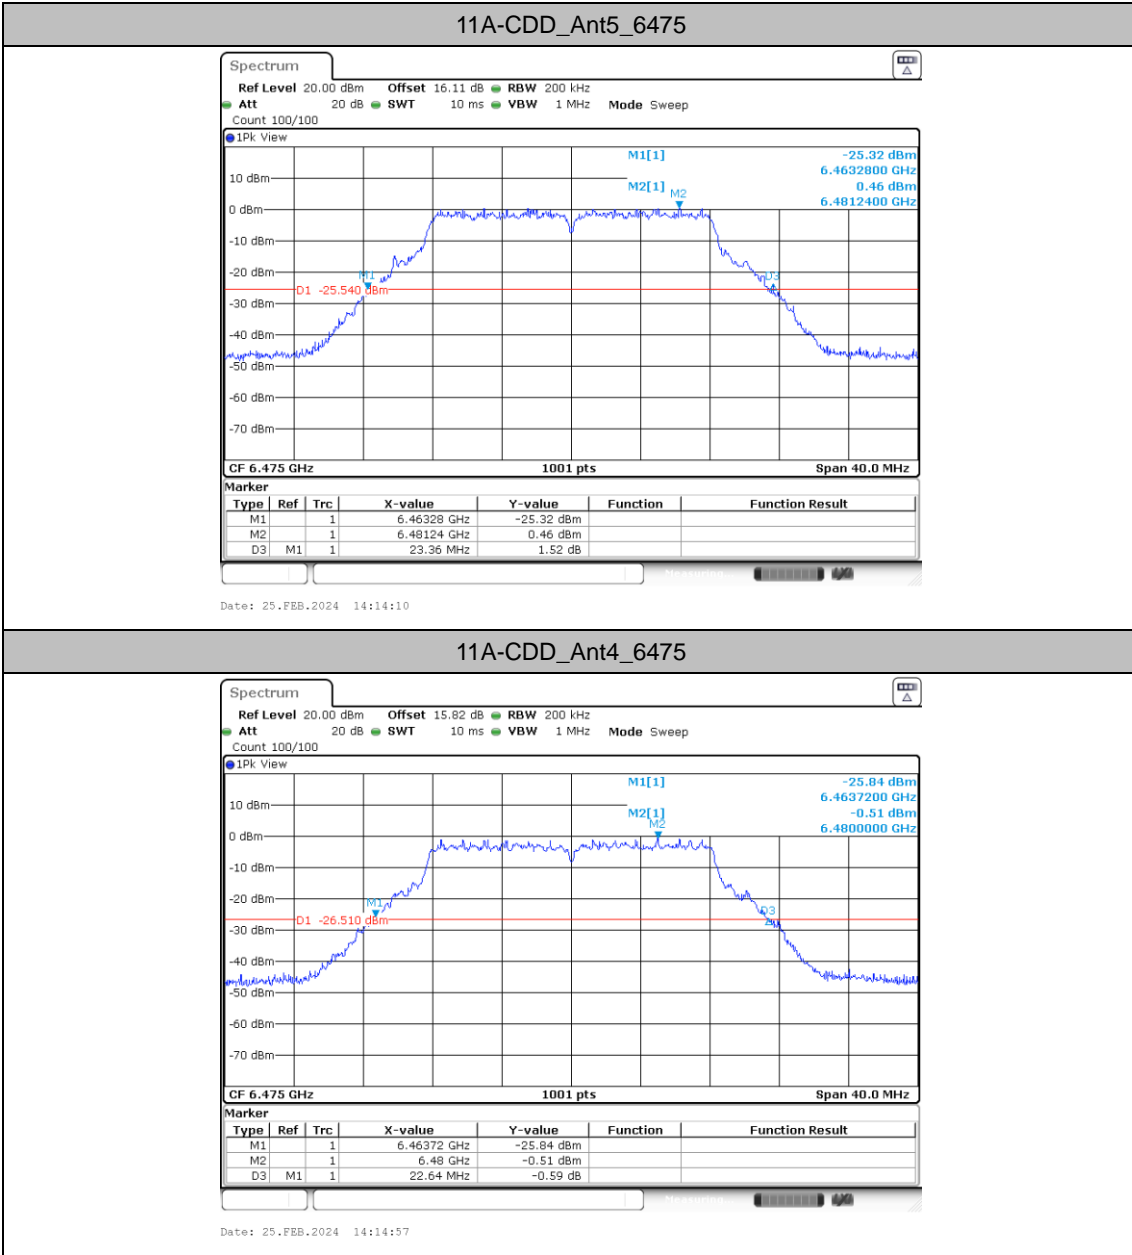


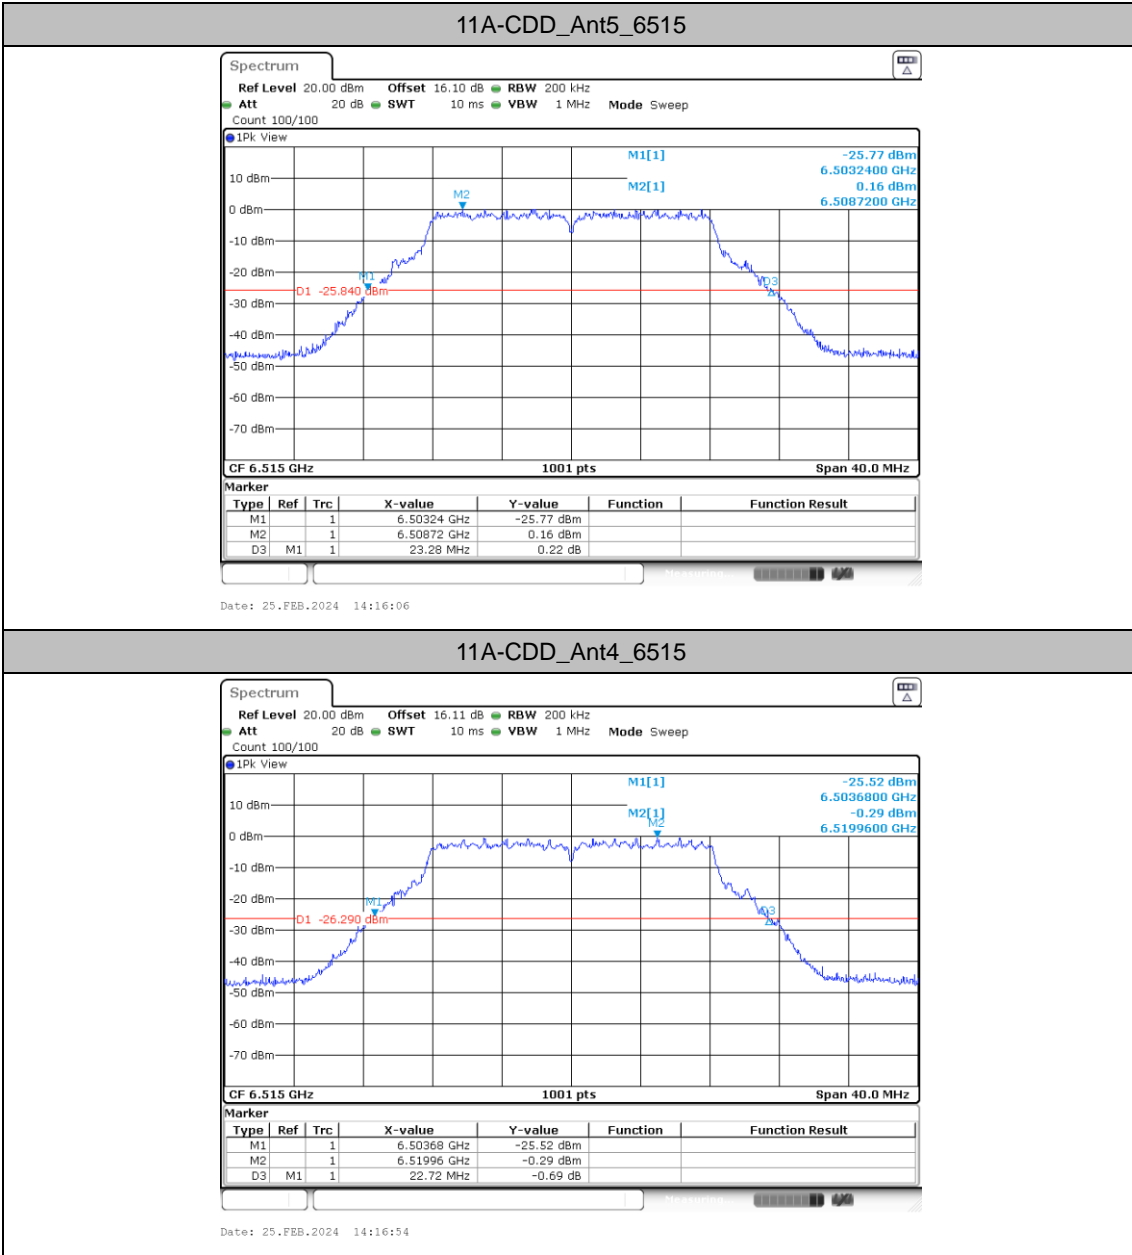


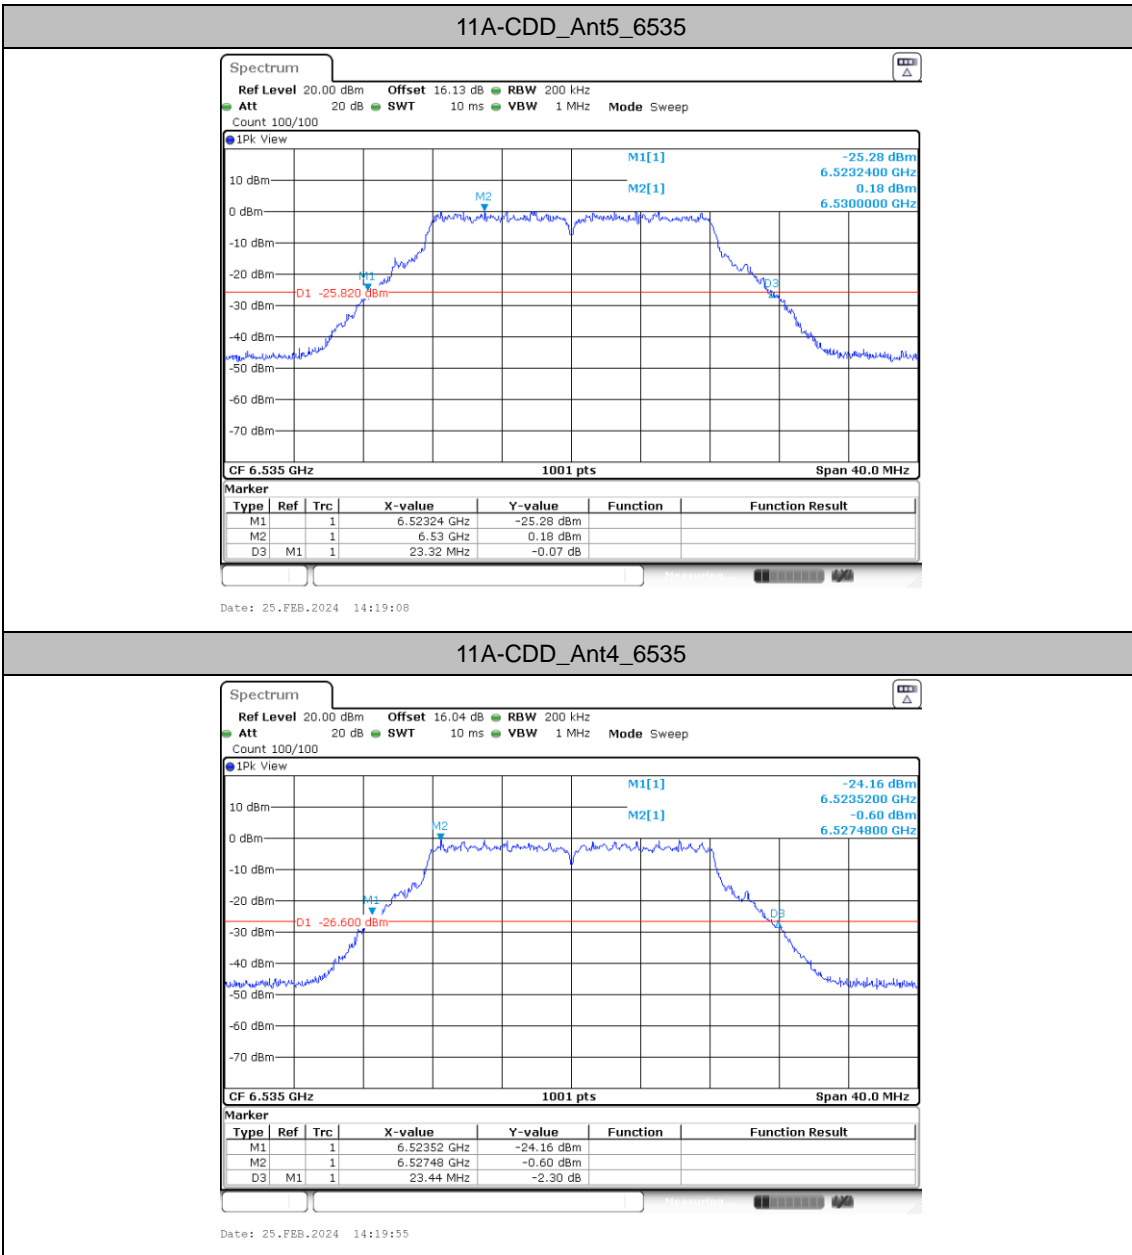

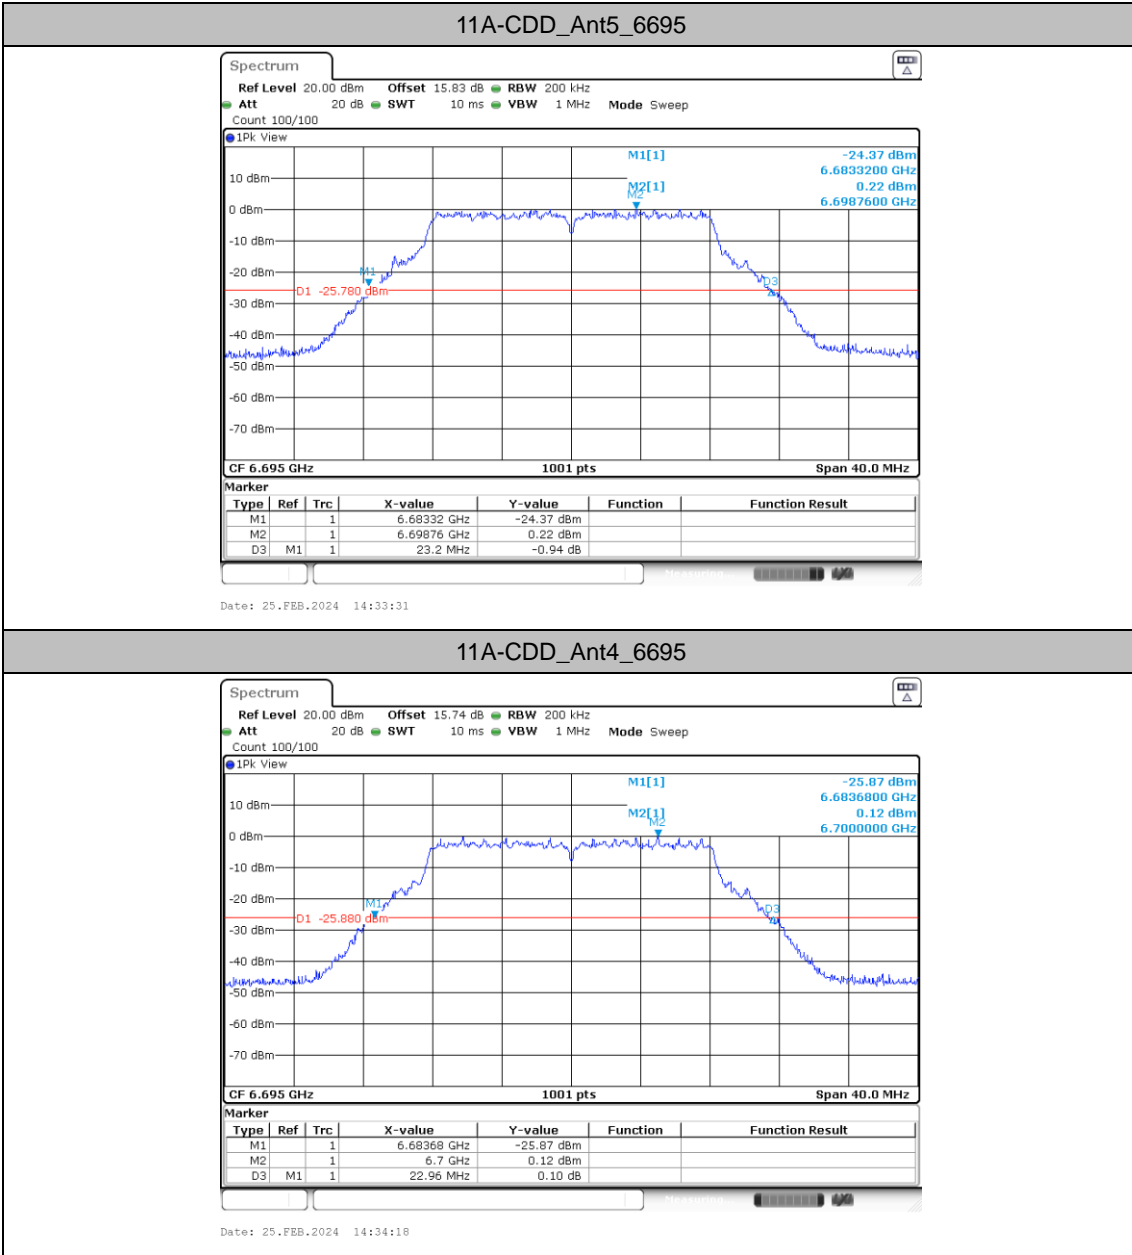

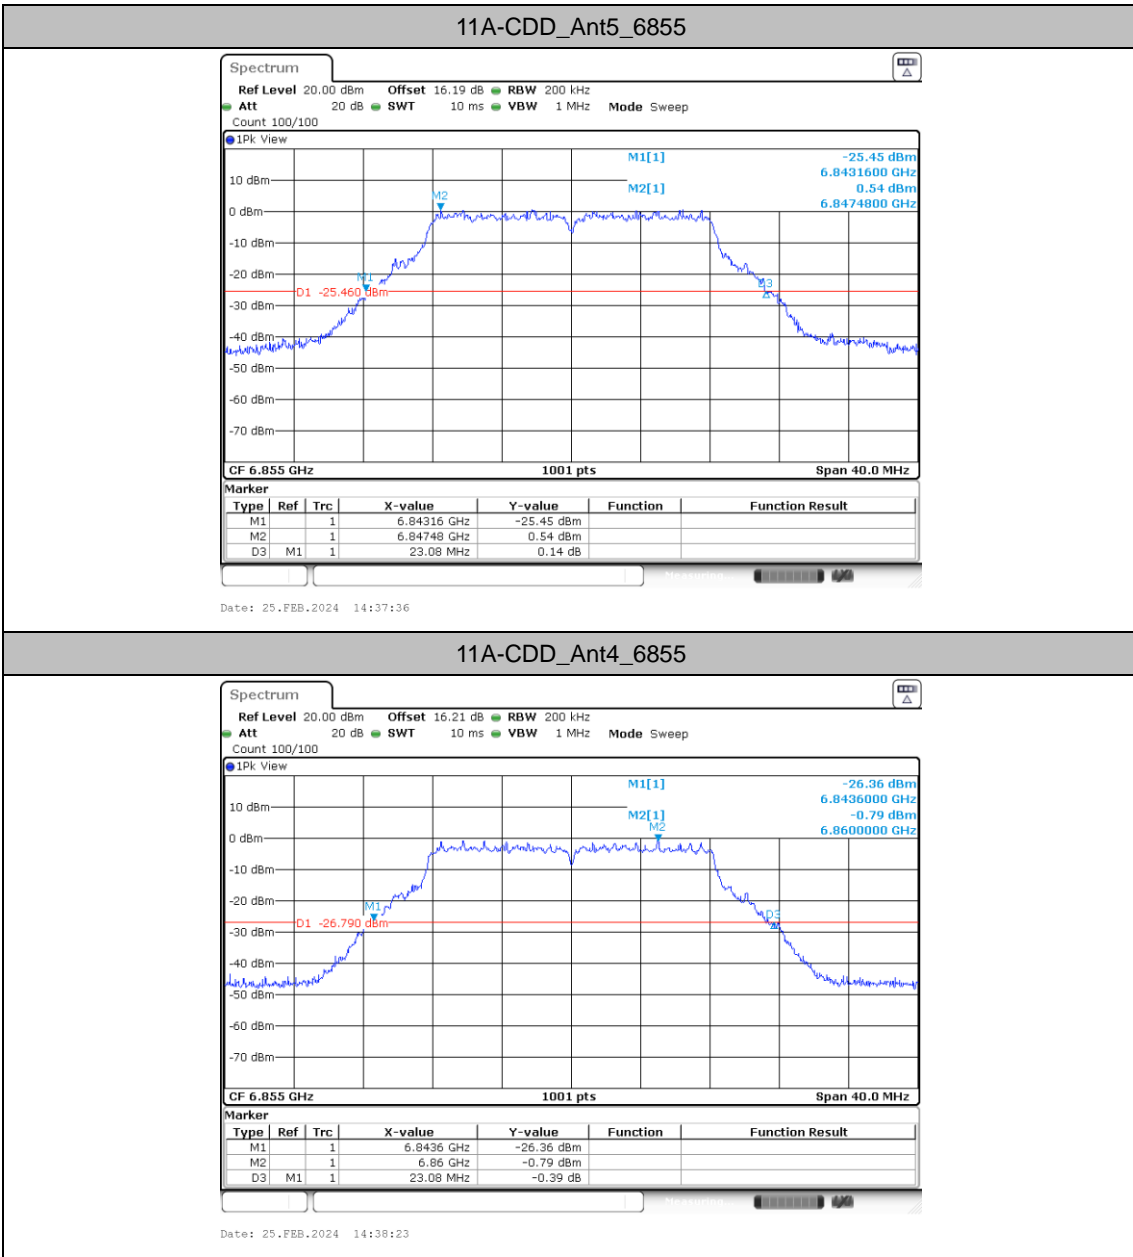

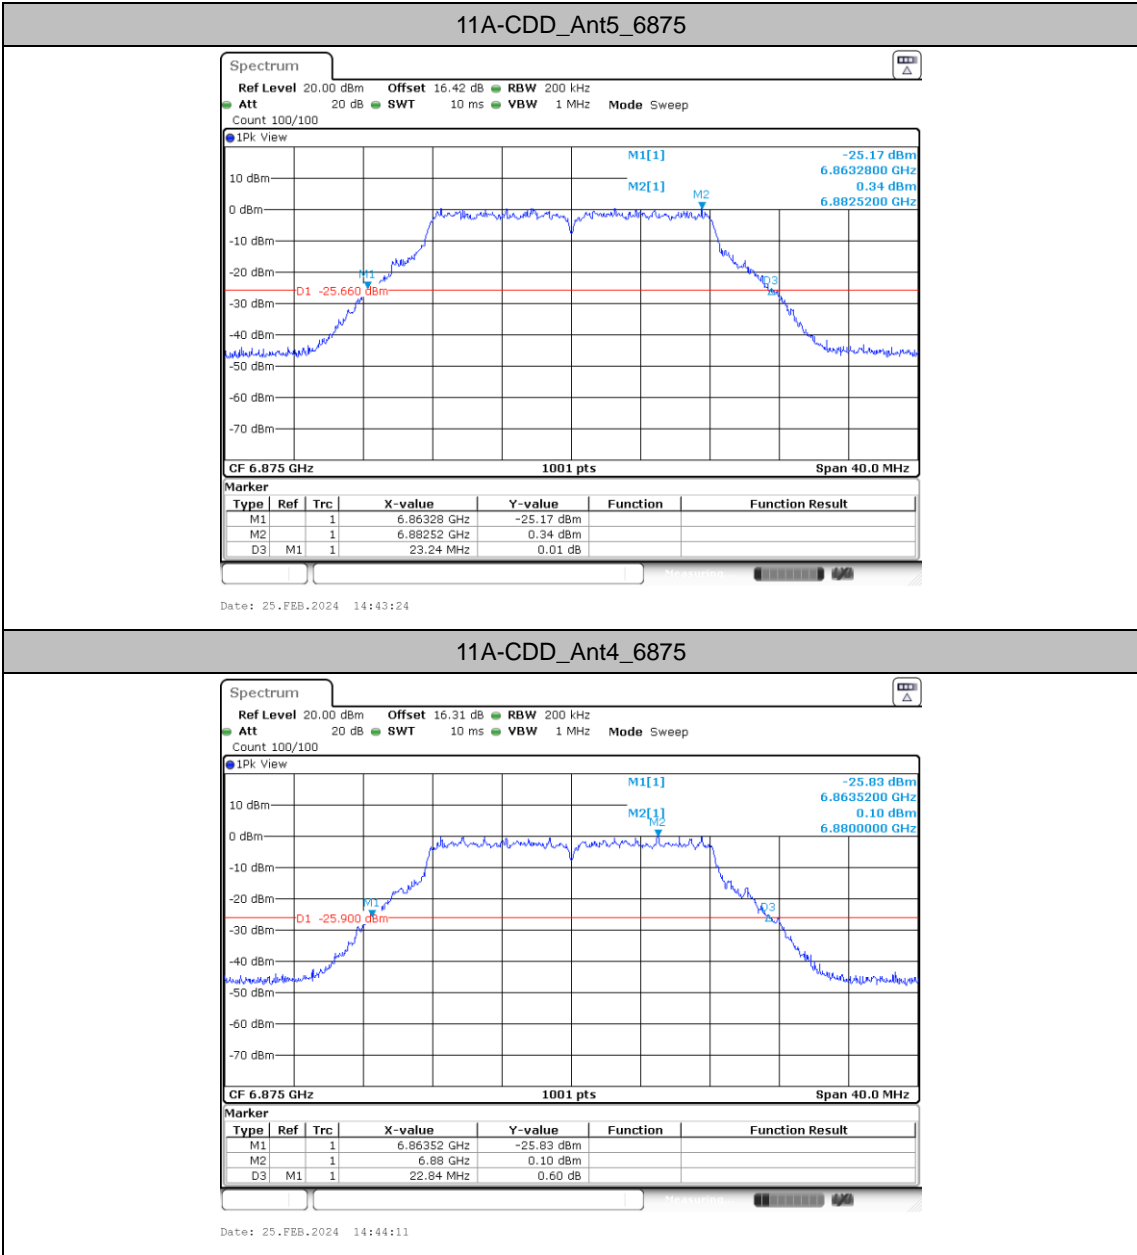

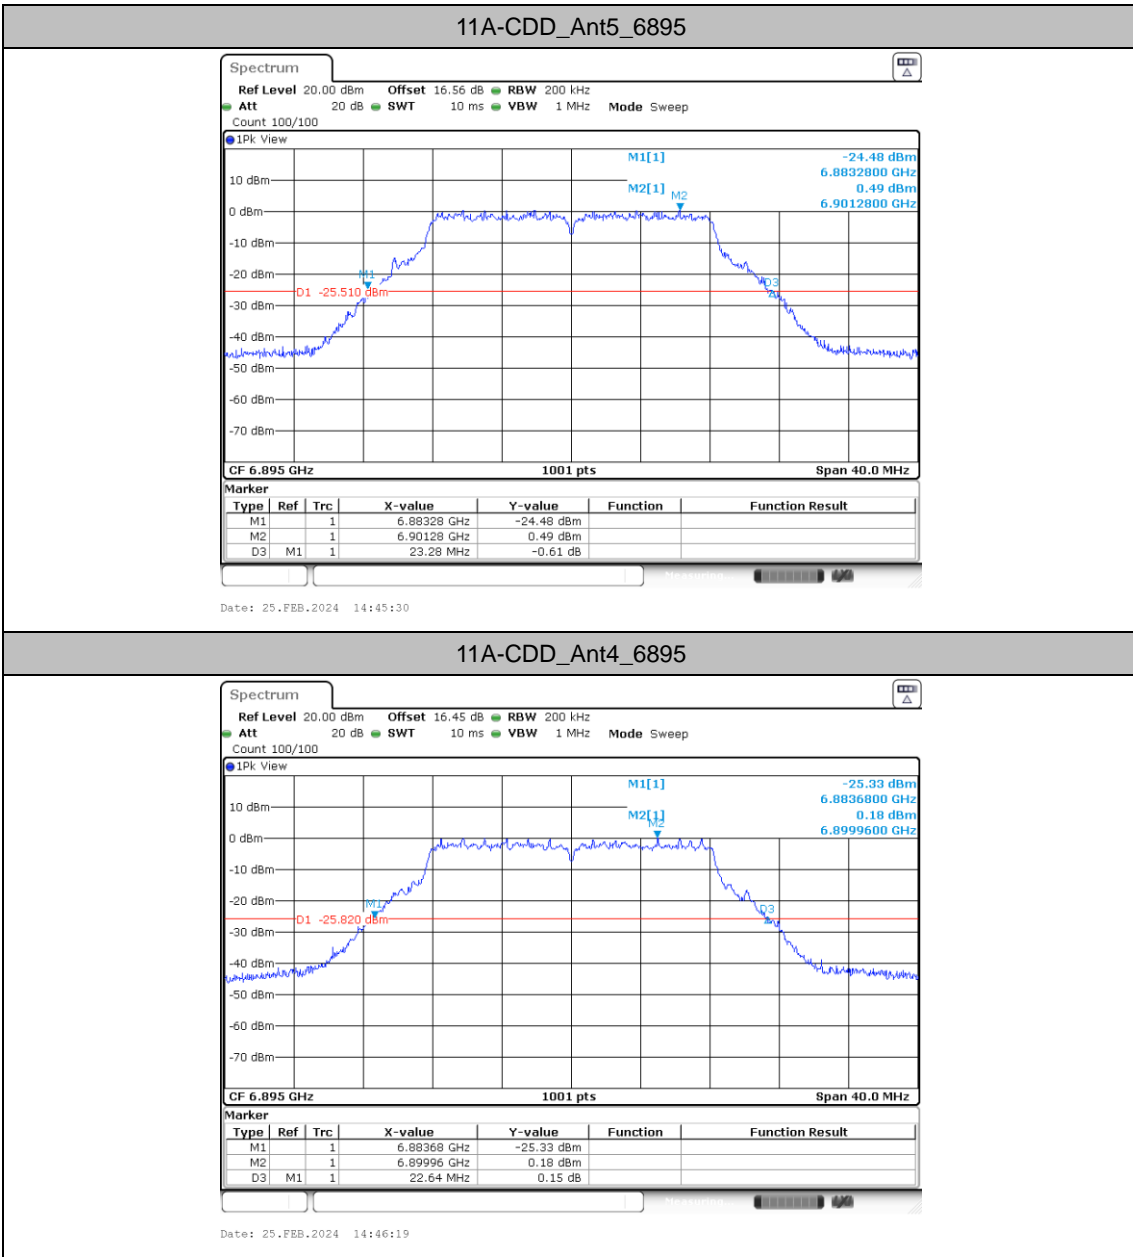
11A-CDD_Ant4_6895

