



# FCC RF Test Report

**APPLICANT** : Motorola Mobility LLC  
**EQUIPMENT** : Mobile Cellular Phone  
**BRAND NAME** : Motorola  
**MODEL NAME** : XT2453-3, XT2453-4, XT2453-5, XT2453V  
**FCC ID** : IHDT56AR7  
**STANDARD** : FCC Part 15 Subpart E §15.407  
**CLASSIFICATION** : 15E 6 GHz Low Power Indoor Client (6XD)  
**TEST DATE(S)** : Feb. 24, 2024 ~ Apr. 07, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (ShenZhen)

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

*Jason Jia*



Approved by: Jason Jia

**Sporton International Inc. (Kunshan)**

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China**



# Table of Contents

- 1 General Description ..... 5**
  - 1.1 Applicant ..... 5
  - 1.2 Manufacturer ..... 5
  - 1.3 Product Feature of Equipment Under Test ..... 5
  - 1.4 Product Specification of Equipment Under Test ..... 6
  - 1.5 Modification of EUT ..... 6
  - 1.6 Specification of Accessory ..... 7
  - 1.7 Testing Location ..... 7
  - 1.8 Test Software ..... 8
  - 1.9 Applicable Standards ..... 8
- 2 Test Configuration of Equipment Under Test ..... 9**
  - 2.1 Carrier Frequency and Channel ..... 9
  - 2.2 Test Mode ..... 11
  - 2.3 Connection Diagram of Test System ..... 13
  - 2.4 Support Unit used in test configuration and system ..... 14
  - 2.5 EUT Operation Test Setup ..... 14
  - 2.6 Measurement Results Explanation Example ..... 14
- 3 Test Result ..... 15**
  - 3.1 26dB & 99% Occupied Bandwidth Measurement ..... 15
  - 3.2 Maximum conducted Output Power and Fundamental Maximum EIRP Measurement ..... 19
  - 3.3 Fundamental Power Spectral Density Measurement ..... 20
  - 3.4 In-Band Emissions (Channel Mask) ..... 33
  - 3.5 Contention Based Protocol ..... 55
  - 3.6 Unwanted Emissions Measurement ..... 64
  - 3.7 AC Conducted Emission Measurement ..... 68
  - 3.8 Antenna Requirements ..... 70
- 4 List of Measuring Equipment ..... 72**
- 5 Measurement Uncertainty ..... 73**
- Appendix A. Conducted Test Results**
- Appendix B. AC Conducted Emission Test Result**
- Appendix C. Radiated Spurious Emission**
- Appendix D. Duty Cycle Plots**
- Appendix E. Setup Photographs**





### Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.407(a)(11)	26dB Emission Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.407(a)(8)	Maximum Conducted Output Power	Reporting only	-
3.2	15.407(a)(8)	Fundamental Maximum EIRP	Pass	-
3.3	15.407(a)(8)	Fundamental Power Spectral Density	Pass	-
3.4	15.407(b)(6)	In-Band Emissions (Channel Mask)	Pass	-
3.5	15.407(d)(6)	Contention Based Protocol	Pass	
3.6	15.407(b)	Unwanted Emissions	Pass	Under limit 3.22 dB at 2389.52 MHz
3.7	15.207	AC Conducted Emission	Pass	Under limit 16.31 dB at 0.502 MHz
3.8	15.203 15.407(a)	Antenna Requirement	Pass	-

**Conformity Assessment Condition:**

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



# 1 General Description

## 1.1 Applicant

Motorola Mobility LLC  
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.2 Manufacturer

Motorola Mobility LLC  
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2453-3, XT2453-4, XT2453-5, XT2453V
FCC ID	IHDT56AR7
IMEI Code	Conducted: 358394210025438 Conduction: 358394210030735/358394210030743 Radiation: 358394210030412/358394210030420 CBP:358394210026279/358394210026287
HW Version	DVT2
SW Version	U3UC34.22
EUT Stage	Identical Prototype

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. The Four models are only for market segment purpose, no other difference.



### 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx/Rx Frequency Range</b>	U-NII-5: 5925 MHz ~ 6425 MHz U-NII-6: 6425 MHz ~ 6525 MHz U-NII-7: 6525 MHz ~ 6875 MHz U-NII-8: 6875 MHz ~ 7125 MHz
<b>Maximum EIRP</b>	<b>&lt;MIMO Ant.5+7&gt;</b> <b>&lt;5925 MHz ~ 7125 MHz &gt;</b> 802.11ax HE20 : 6.24 dBm / 0.0042 W 802.11ax HE40 : 7.05 dBm / 0.0051 W 802.11ax HE80 : 6.82 dBm / 0.0048 W
<b>99% Occupied Bandwidth</b>	802.11ax HE20 : 19.03 MHz 802.11ax HE40 : 37.56 MHz 802.11ax HE80 : 77.80 MHz
<b>Antenna Type / Gain</b>	<b>&lt;5925 MHz ~ 6425 MHz &gt;</b> <Ant. 5> : Metal Antenna with gain -7.00 dBi <Ant. 7> : IFA Antenna with gain -7.00 dBi <b>&lt;6425 MHz ~ 6525 MHz &gt;</b> <Ant. 5> : Metal Antenna with gain -7.20 dBi <Ant. 7> : IFA Antenna with gain -7.20 dBi <b>&lt;6525 MHz ~ 6875 MHz &gt;</b> <Ant. 5> : Metal Antenna with gain -7.00 dBi <Ant. 7> : IFA Antenna with gain -6.80 dBi <b>&lt;6875 MHz ~ 7125 MHz &gt;</b> <Ant. 5> : Metal Antenna with gain -7.00 dBi <Ant. 7> : IFA Antenna with gain -7.00 dBi
<b>Type of Modulation</b>	802.11ax: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)

**Remark:**

1. WLAN 11ax support MIMO CDD & Beamforming mode, the maximum EIRP of Beamforming mode will set less than CDD mode, thus full test CDD mode.
2. For WLAN SISO & MIMO mode, the whole testing has assessed only MIMO mode by referring to the higher normal output power.
3. 802.11ax support full RU tone and partial RU tone, both full RU and partial RU-left (for low CH) and partial RU-right (for high CH) are tested for conducted power/PSD/Channel Mask, all the other test case were performed with full RU with its maximum power/PSD.
4. The device does not support 802.11ax channel puncturing mode.
5. The device does not support UNII-8\_CH233 (BW=20M, Center Frequency = 7115MHz).
6. CBP test with antenna path of minimum gain (Antenna 5, Gain = -7.2dBi).

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.



## 1.6 Specification of Accessory

Specification of Accessory				
Battery 1	Brand Name	Motorola	Model Name	QR11
Battery 2	Brand Name	Motorola	Model Name	QR31
USB Cable 1	Brand Name	Motorola(CABLETECH)	Model Name	SC18E05246
USB Cable 2	Brand Name	Motorola(SAIBAO)	Model Name	SC18D86732

## 1.7 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-KS DFS01-KS	CN1257	314309

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	03CH01-SZ	CN1256	421272



### 1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	CO01-KS	AUDIX	E3	6.2009-8-24
2.	03CH01-SZ	AUDIX	E3	6.2009-8-24

### 1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 987594 D02 U-NII 6 GHz EMC Measurement v02r01
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.





## 2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

### 2.1 Carrier Frequency and Channel

<U-NII-5, 6, 7, 8>

BW 20M	Channel	1	5	9	13	17	21	25	29
	Freq. (MHz)	5955	5975	5995	6015	6035	6055	6075	6095
BW 40M	Channel	3		11		19		27	
	Freq. (MHz)	5965		6005		6045		6085	
BW 80M	Channel	7				23			
	Freq. (MHz)	5985				6065			

BW 20M	Channel	33	37	41	45	49	53	57	61
	Freq. (MHz)	6115	6135	6155	6175	6195	6215	6235	6255
BW 40M	Channel	35		43		51		59	
	Freq. (MHz)	6125		6165		6205		6245	
BW 80M	Channel	39				55			
	Freq. (MHz)	6145				6225			

BW 20M	Channel	65	69	73	77	81	85	89	93
	Freq. (MHz)	6275	6295	6315	6335	6355	6375	6395	6415
BW 40M	Channel	67		75		83		91	
	Freq. (MHz)	6285		6325		6365		6405	
BW 80M	Channel	71				87			
	Freq. (MHz)	6305				6385			

BW 20M	Channel	97	101	105	109	113	117	121	125
	Freq. (MHz)	6435	6455	6475	6495	6515	6535	6555	6575
BW 40M	Channel	99		107		115		123	
	Freq. (MHz)	6445		6485		6525		6565	
BW 80M	Channel	103				119			
	Freq. (MHz)	6465				6545			



BW 20M	Channel	129	133	137	141	145	149	153	157
	Freq. (MHz)	6595	6615	6635	6655	6675	6695	6715	6735
BW 40M	Channel	131		139		147		155	
	Freq. (MHz)	6605		6645		6685		6725	
BW 80M	Channel	135				151			
	Freq. (MHz)	6625				6705			

BW 20M	Channel	161	165	169	173	177	181	185	189
	Freq. (MHz)	6755	6775	6795	6815	6835	6855	6875	6895
BW 40M	Channel	163		171		179		187	
	Freq. (MHz)	6765		6805		6845		6885	
BW 80M	Channel	167				183			
	Freq. (MHz)	6785				6865			

BW 20M	Channel	193	197	201	205	209	213	217	221
	Freq. (MHz)	6915	6935	6955	6975	6995	7015	7035	7055
BW 40M	Channel	195		203		211		219	
	Freq. (MHz)	6925		6965		7005		7045	
BW 80M	Channel	199				215			
	Freq. (MHz)	6945				7025			

BW 20M	Channel	225	229
	Freq. (MHz)	7075	7095
BW 40M	Channel	227	
	Freq. (MHz)	7085	



## 2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0

Test Cases	
<b>AC Conducted Emission</b>	Mode 1 : GSM 850 Idle + BT Link + WLAN Link(6G) + USB Cable1(Charging From Adaptor)
<p><b>Remark:</b> For Radiated Test Cases, the EUT is a folding phone, pretest the open status and closed status, only the worst status perform final test and record in the report.</p> <p>For the accessories, pretest standalone mode / Earphone mode / Adapter mode / Wireless charging mode, only the worst status perform final test and record in the report.</p>	

Simultaneous transmission
5G NR n48 ULMIMO Link + 802.11ax HE80 CH215_MIMO TX + BLE 2M_CH38_TX 5G NR n48 ULMIMO Link + 802.11ax HE80 CH215_MIMO TX + 802.11ax HE40 CH03_MIMO TX



Ch. #		5925-6425 MHz	6425-6525 MHz	6525-6875 MHz	6875-7125 MHz
		UNII-5	UNII-6	UNII-7	UNII-8
		802.11ax HE20	802.11ax HE20	802.11ax HE20	802.11ax HE20
L	Low	001	097	117	189
M	Middle	045	105	149	209
H	High	093	113	181	229
Straddle		-	-	-	185


Ch. #		5925-6425 MHz	6425-6525 MHz	6525-6875 MHz	6875-7125 MHz
		UNII-5	UNII-6	UNII-7	UNII-8
		802.11ax HE40	802.11ax HE40	802.11ax HE40	802.11ax HE40
L	Low	003	099	123	195
M	Middle	043	-	147	203
H	High	091	107	179	227
Straddle		-	115	-	187

Ch. #		5925-6425 MHz	6425-6525 MHz	6525-6875 MHz	6875-7125 MHz
		UNII-5	UNII-6	UNII-7	UNII-8
		802.11ax HE80	802.11ax HE80	802.11ax HE80	802.11ax HE80
L	Low	007	103	135	199
M	Middle	039		151	-
H	High	087		167	215
Straddle		-	119	183	-


Remark: For radiation spurious emission, the final modulation and the worst data rate was reference the max RF conducted power.

## 2.3 Connection Diagram of Test System

For AC Conducted Emission

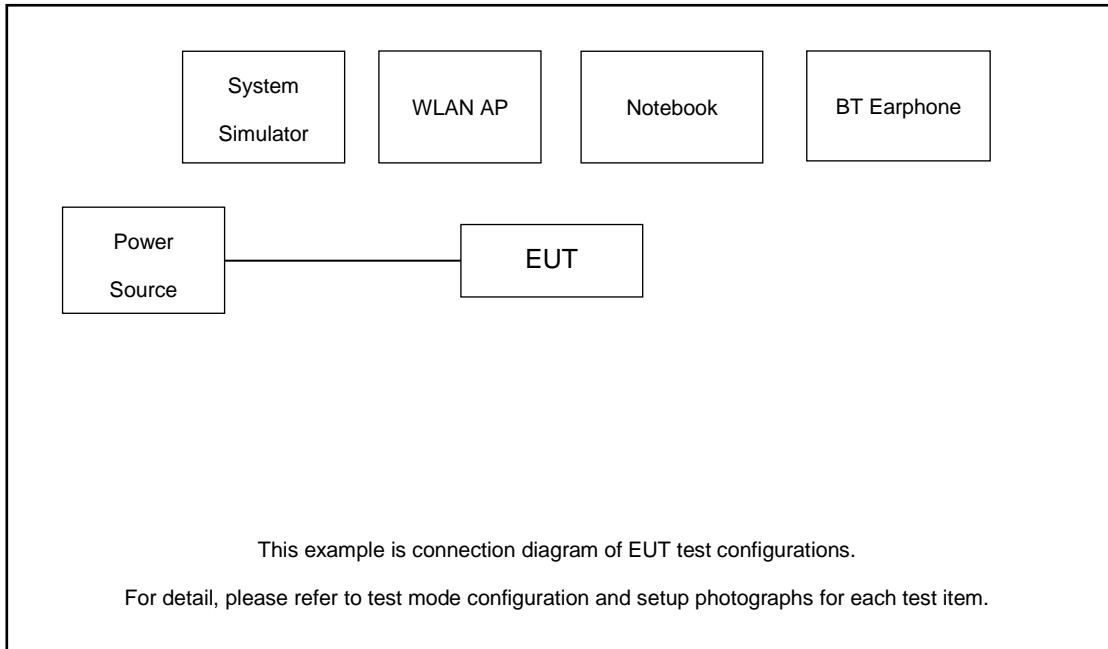

For Radiated Emission

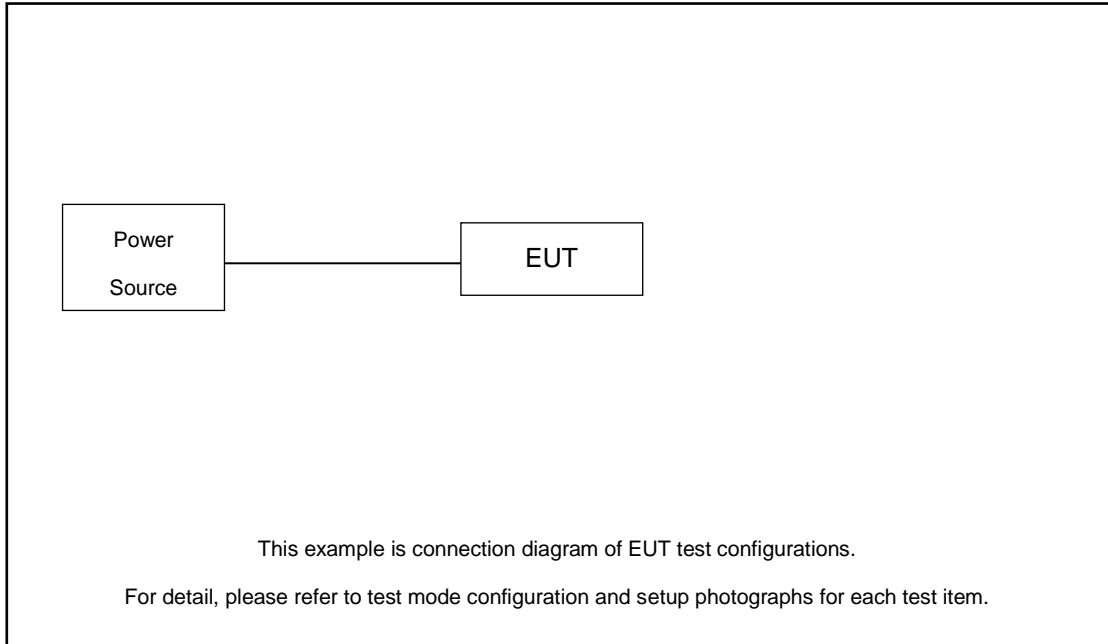



## 2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8m
2.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded, 1.8m
3.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A
4.	AC Adapter	Moto	N/A	N/A	N/A	N/A

## 2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program (QRCT TX Tool) was provided and enabled to make EUT continuously transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

## 2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 3.0 dB and 10dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\
 &= 3.0 + 10 = 13.0 \text{ (dB)}
 \end{aligned}$$

### 3 Test Result

#### 3.1 26dB & 99% Occupied Bandwidth Measurement

##### 3.1.1 CFR 15.407 (a)(8)

The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.


##### 3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW)  $\geq 3 * RBW$ .
8. Measure and record the results in the test report.



##### 3.1.4 Test Setup

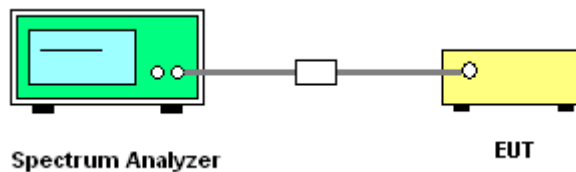

##### 3.1.5 Test Result of 26dB & 99% Occupied Bandwidth





For 20MHz Bandwidth:

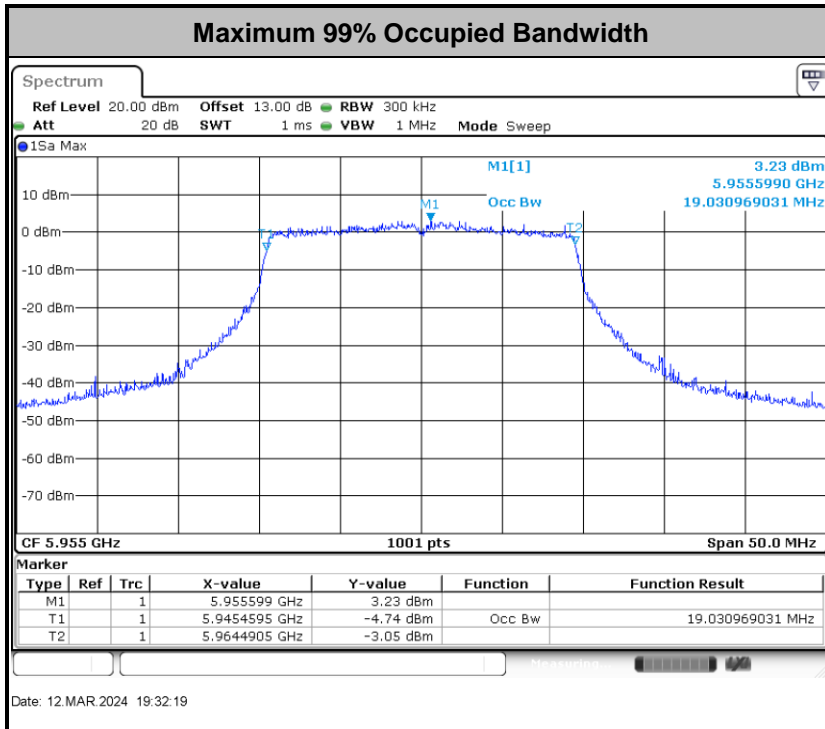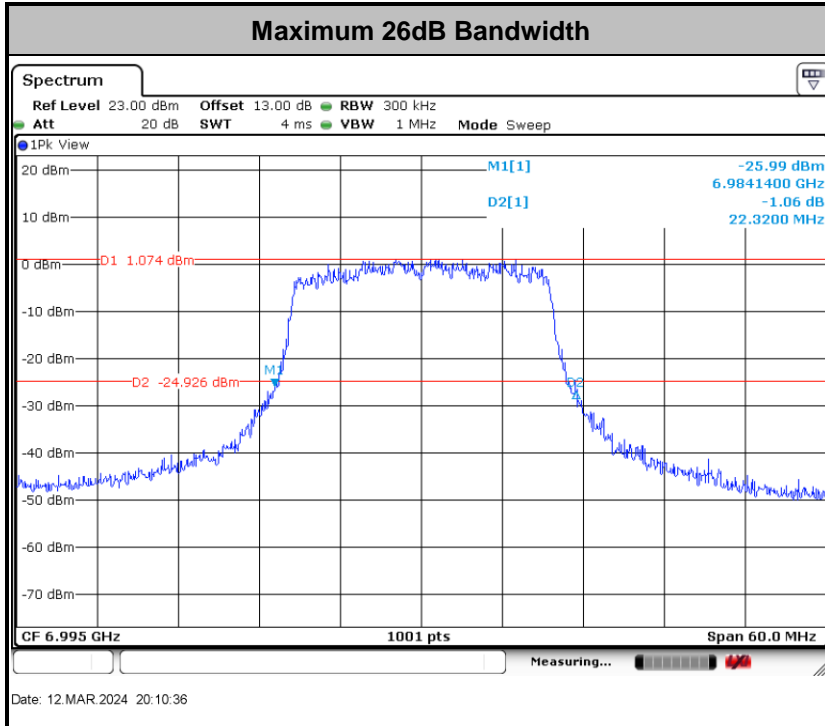







For 40MHz Bandwidth:

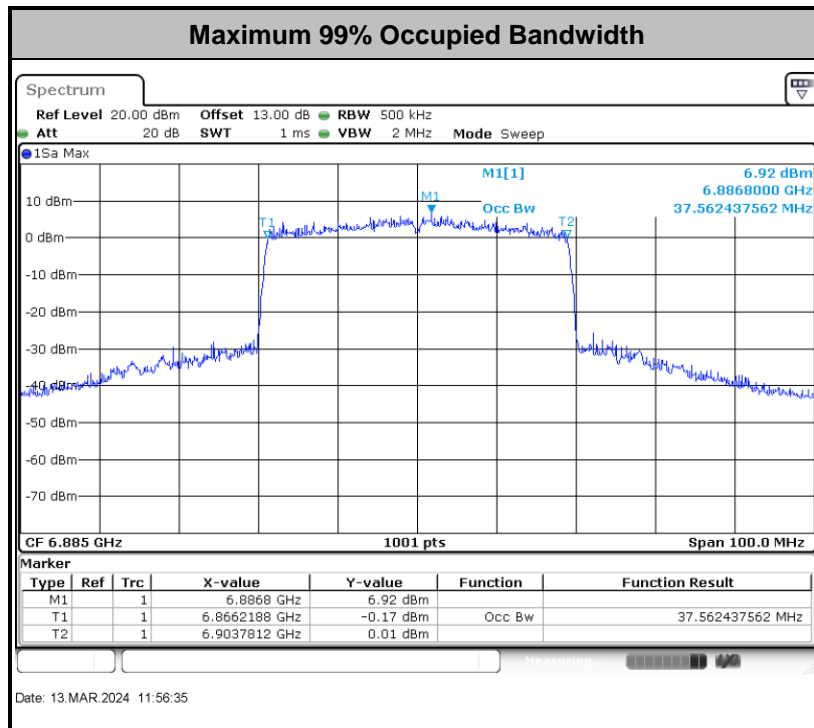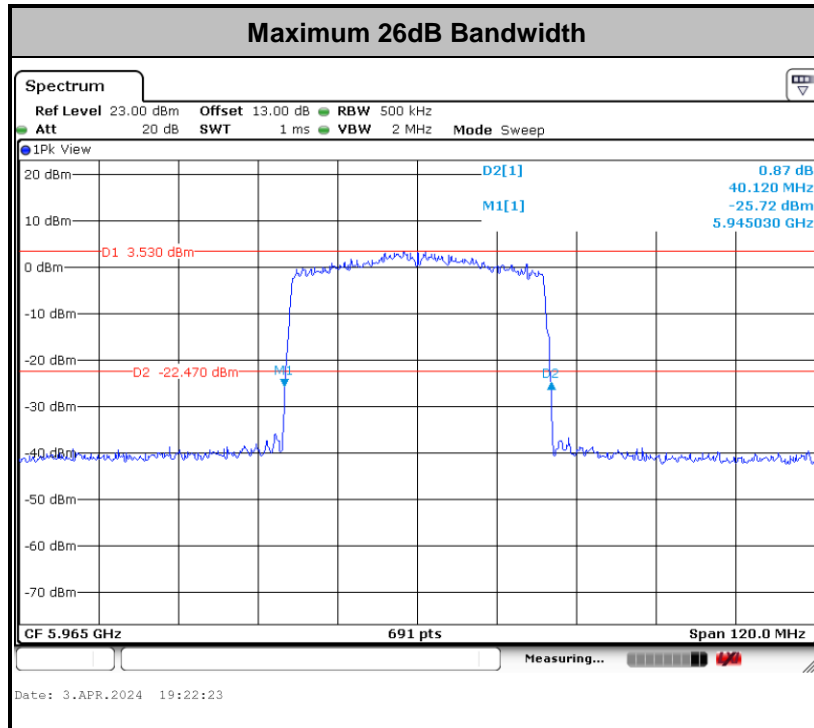



For 80MHz Bandwidth:

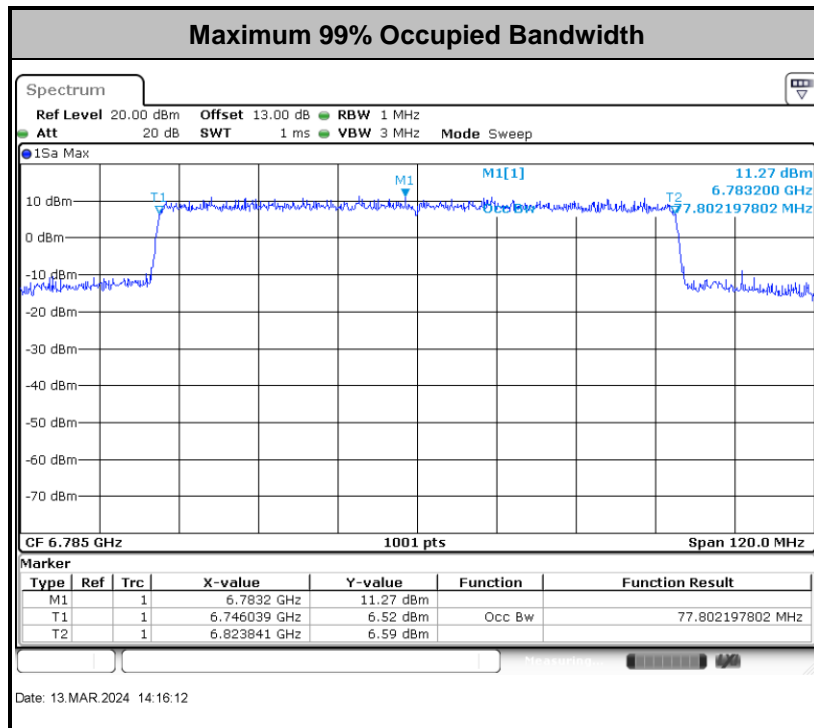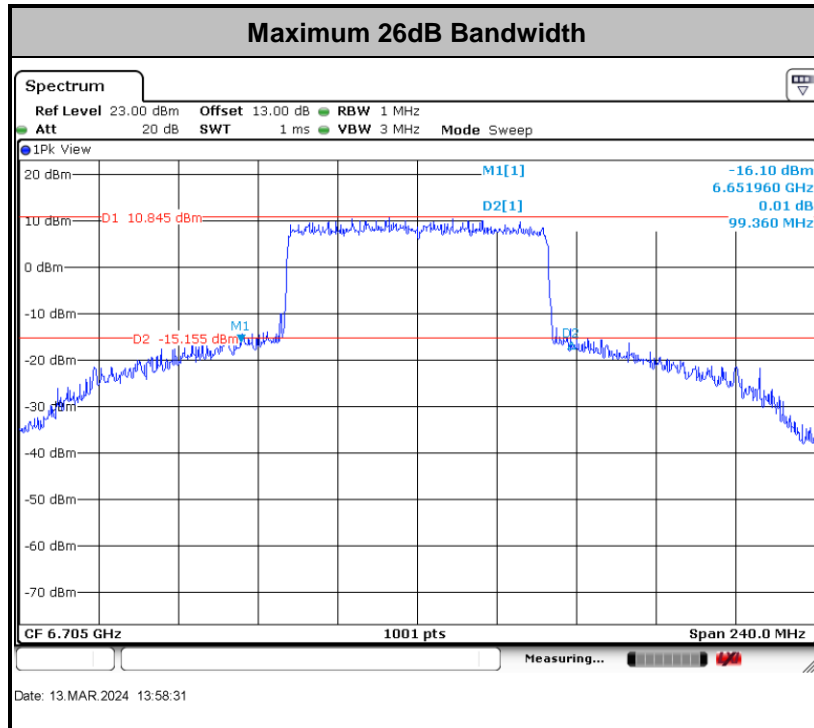

**Note:** The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Maximum conducted Output Power and Fundamental Maximum EIRP Measurement

### 3.2.1 Limit of Fundamental Maximum EIRP

<FCC 14-30 CFR 15.407>

(a)(8) For client devices operating under the control of an indoor access point in the 5.925-7.125 GHz bands, the maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm.

### 3.2.2 Measuring Instruments

See list of measuring equipment of this test report.


### 3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor,  $10 \log(1/x)$ , where  $x$  is the duty cycle.
4. For MIMO mode, the measure-and-sum technique should be used for measuring the in-band transmit power of a device.

### 3.2.4 Test Setup

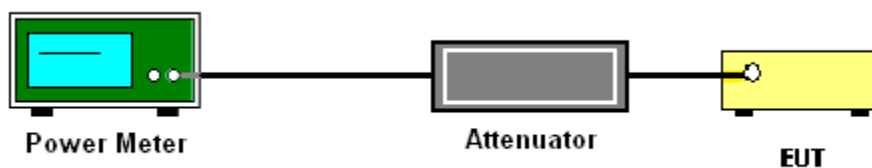

### 3.2.5 Test Result of Fundamental Maximum EIRP

Please refer to Appendix A.



### 3.3 Fundamental Power Spectral Density Measurement

#### 3.3.1 Limit of Fundamental Power Spectral Density

<FCC 14-30 CFR 15.407>

(a)(8) For client devices operating under the control of an indoor access point in the 5.925-7.125 GHz bands, the maximum power spectral density must not exceed -1 dBm e.i.r.p. in any 1-megahertz band.

#### 3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

#### 3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.

**# Method SA-2 #**


(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
  - Set span to encompass the entire emission bandwidth (EBW) of the signal.
  - Set RBW = 1 MHz.
  - Set VBW  $\geq$  3 MHz.
  - Number of points in sweep  $\geq$  2 Span / RBW.
  - Sweep time = auto.
  - Detector = RMS
  - Trace average at least 100 traces in power averaging mode.
  - Add  $10 \log(1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add  $10 \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
  2. Each plot has already offset with cable loss, attenuator loss and duty factor. Measure the PPSD and record it.
  3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (a): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.



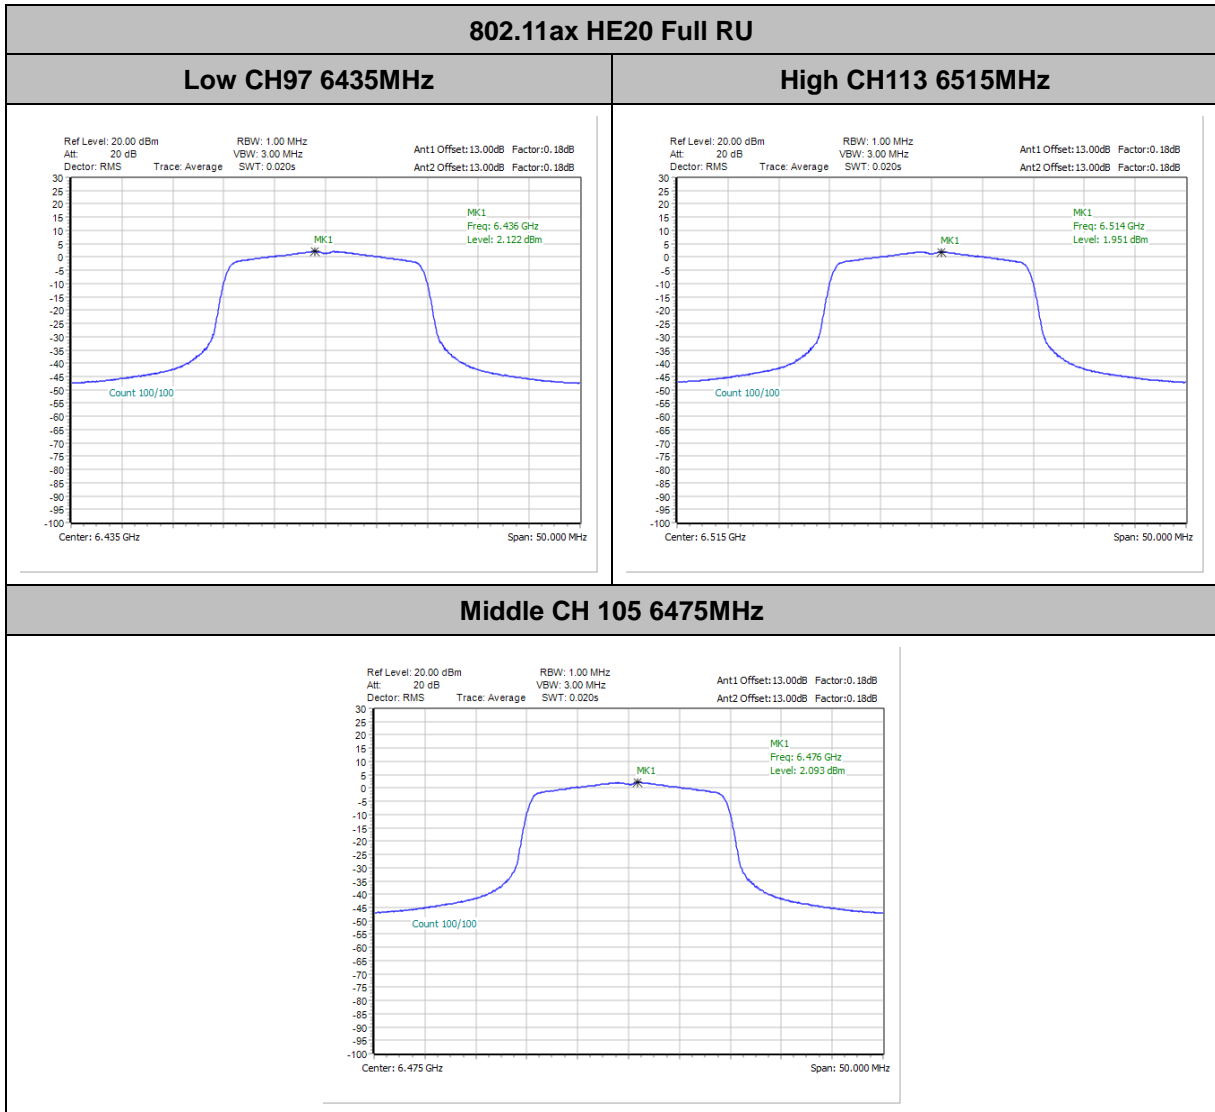


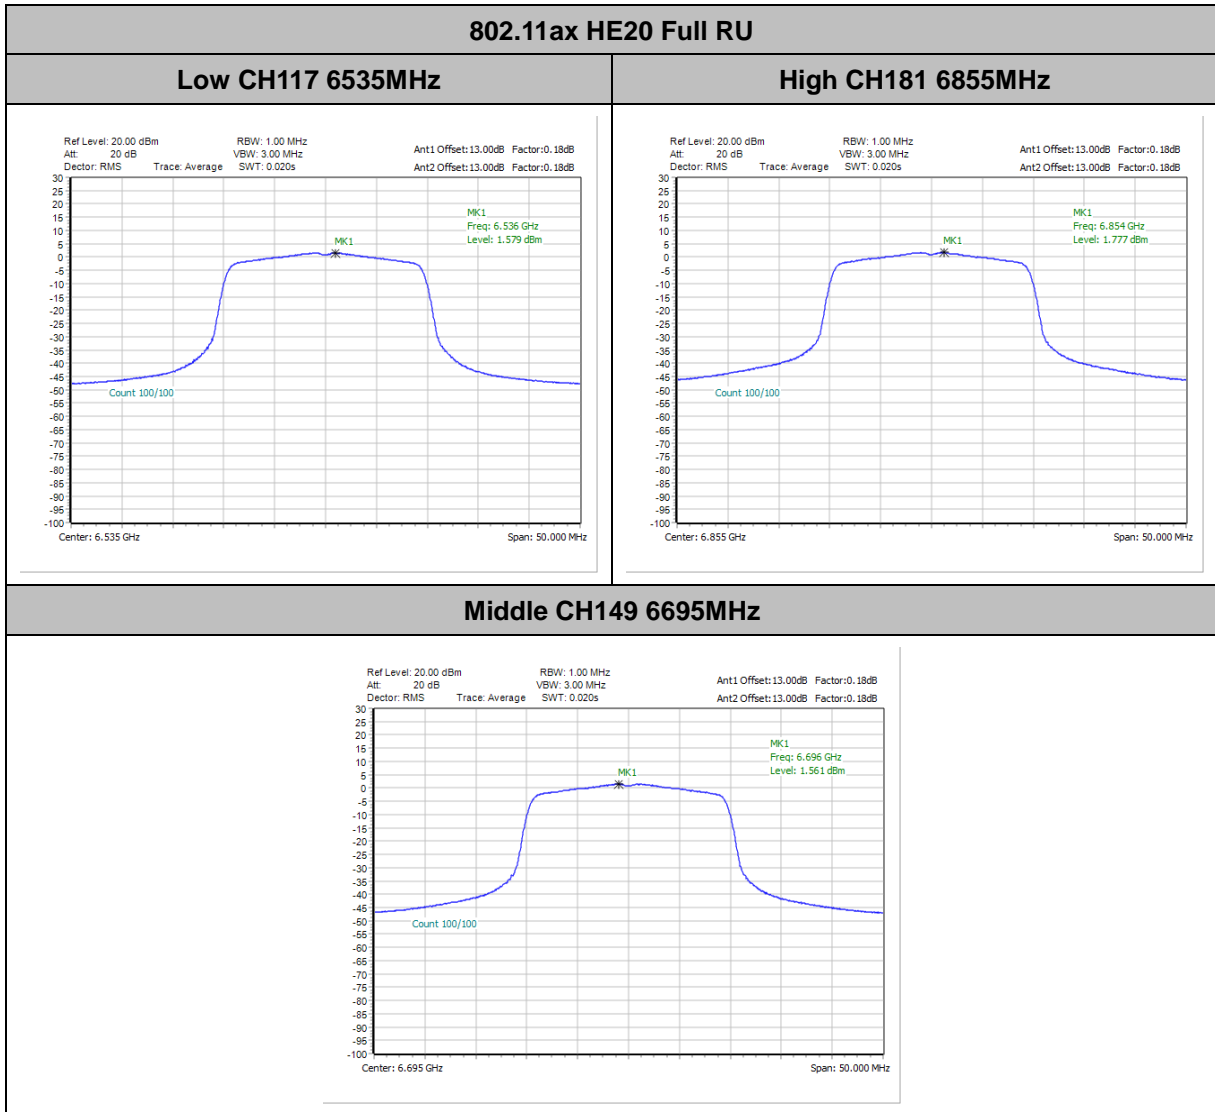




802.11ax HE20 Full RU


Low CH185 6875MHz

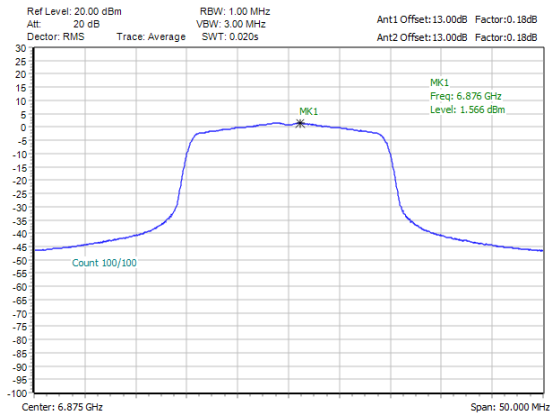

High CH209 6995MHz

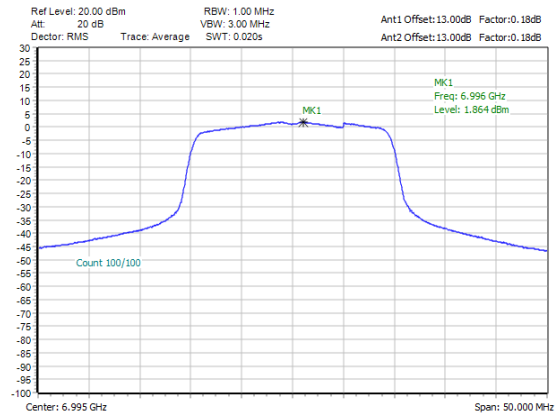


Middle CH189 6895MHz

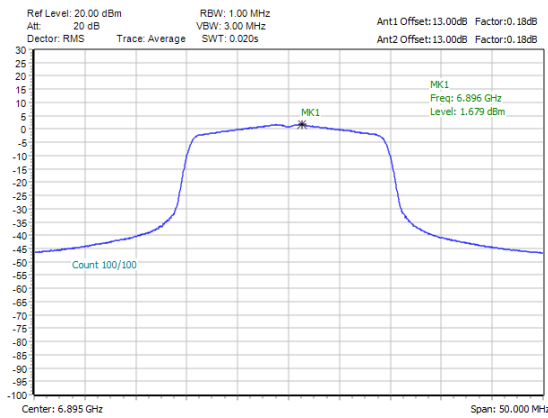

802.11ax HE20 Full RU

Middle CH229 7095MHz

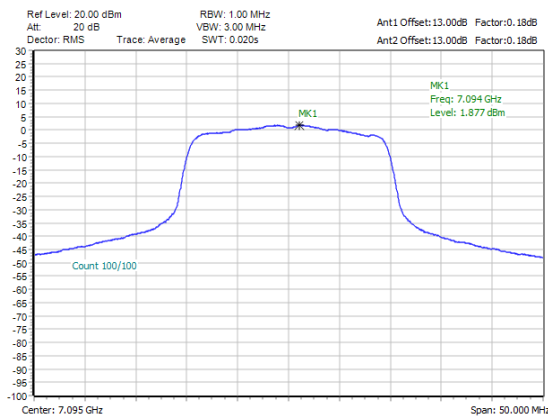







802.11ax HE40 Full RU


Low CH03 5965MHz

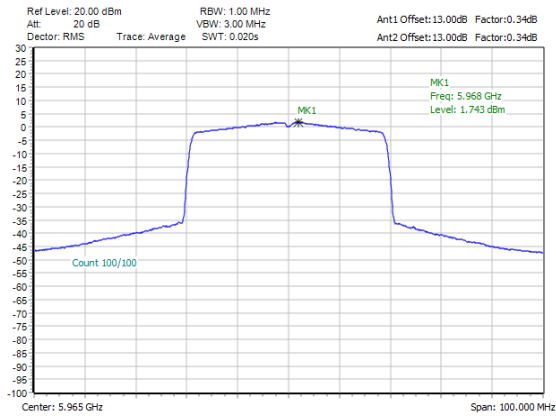


High CH91 6405MHz

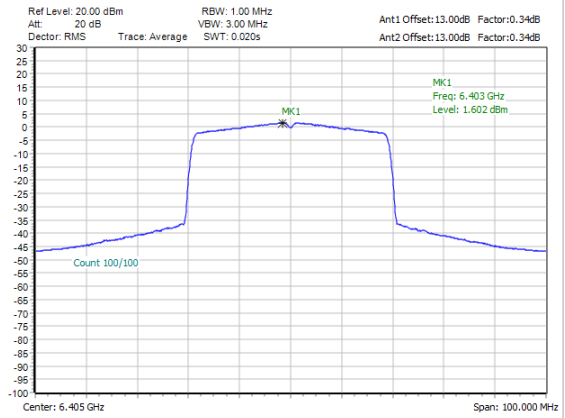

Middle CH43 6165MHz

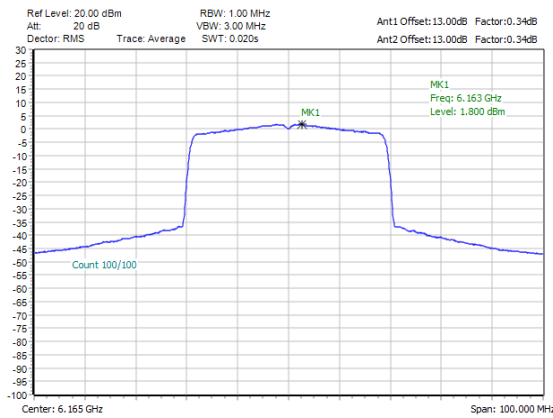


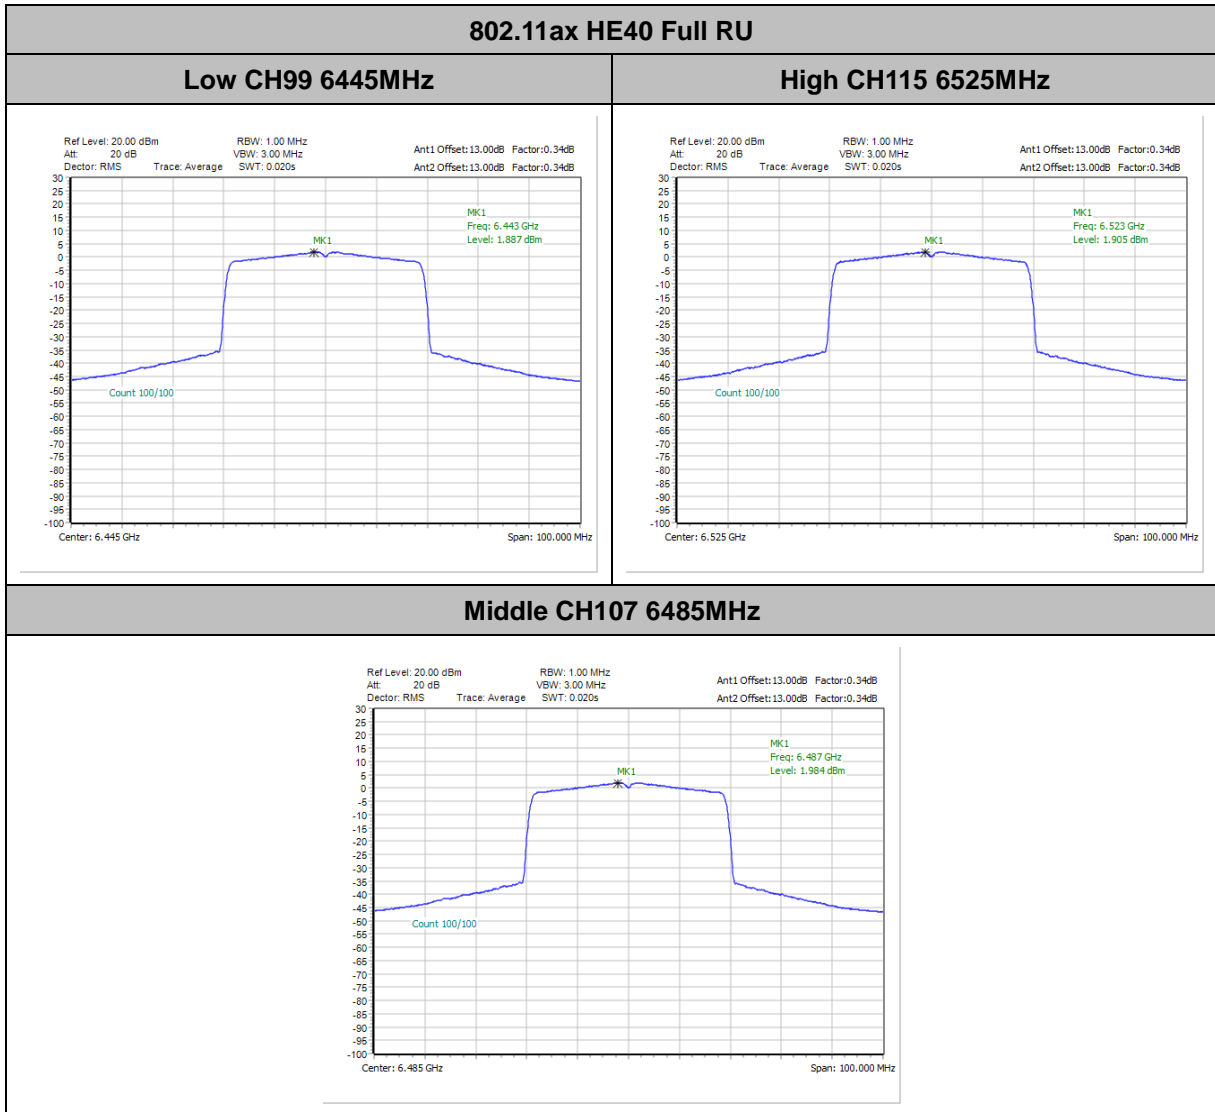




802.11ax HE40 Full RU


Low CH123 6565MHz

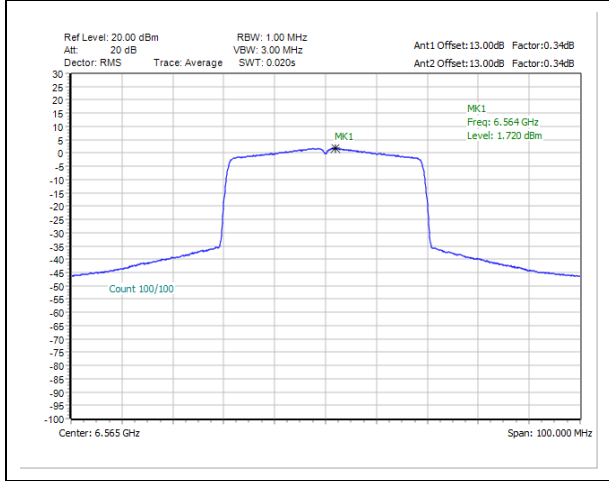

High CH179 6845MHz

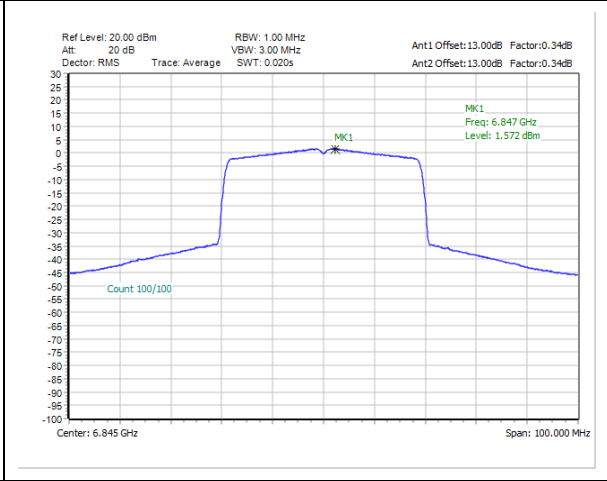


Middle CH147 6685MHz

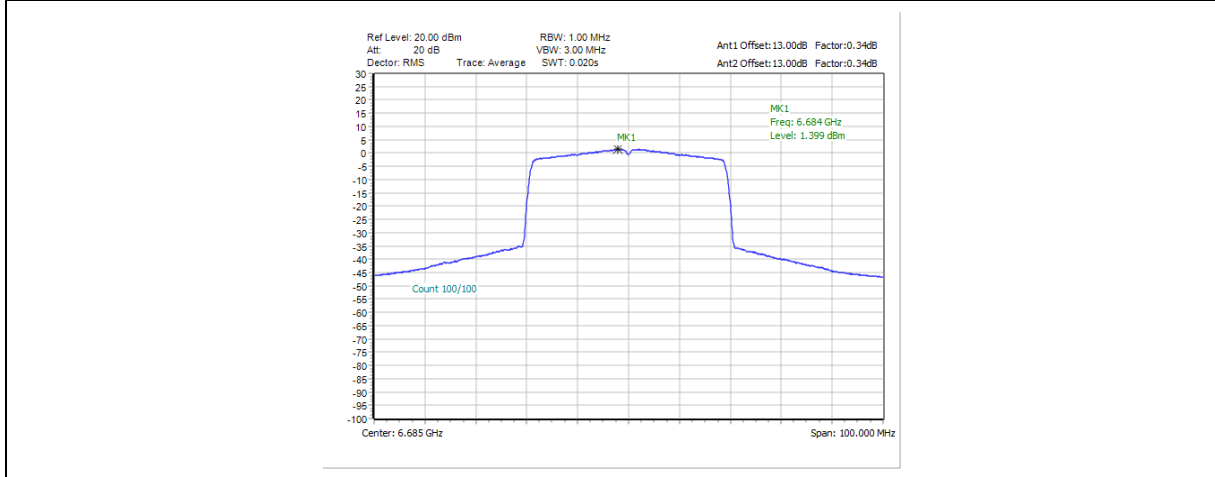




802.11ax HE40 Full RU


Low CH187 6885MHz

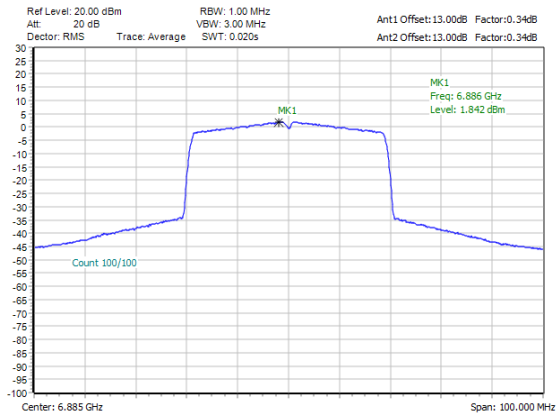

High CH203 6965MHz

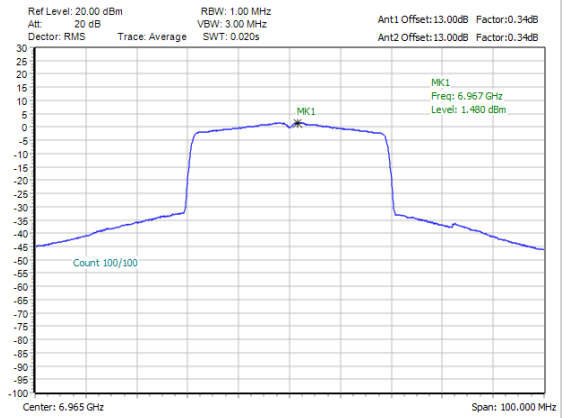



Middle CH195 6925MHz



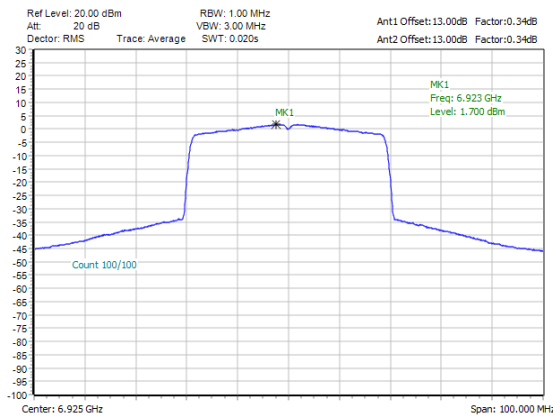




802.11ax HE40 Full RU

Middle CH227 7085MHz

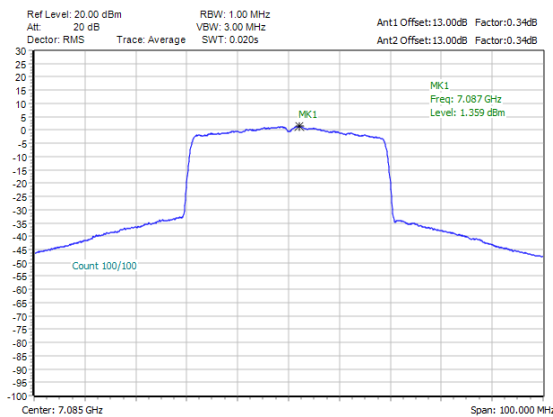

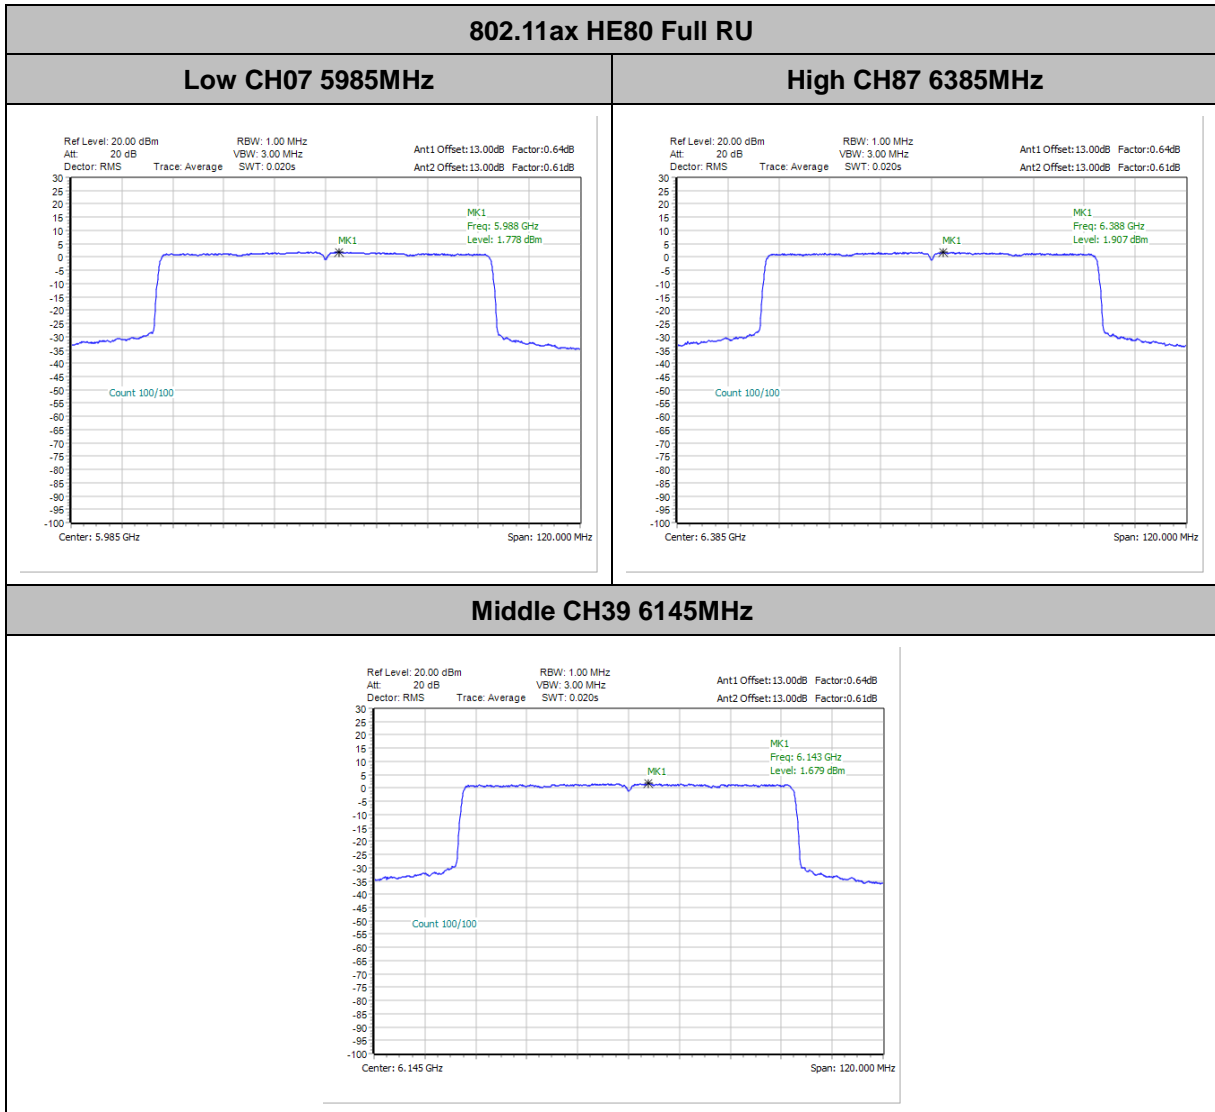

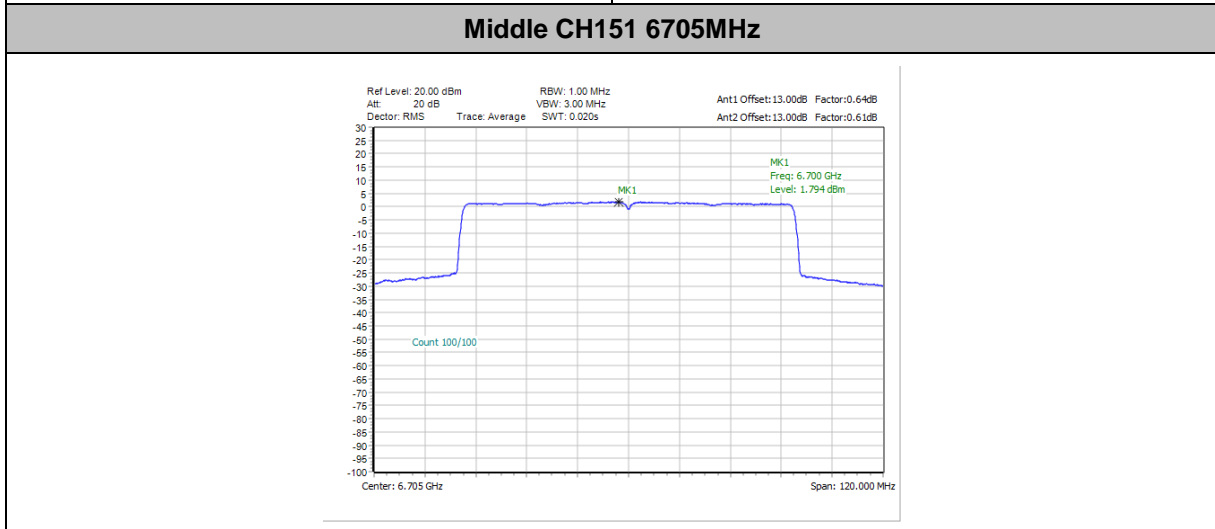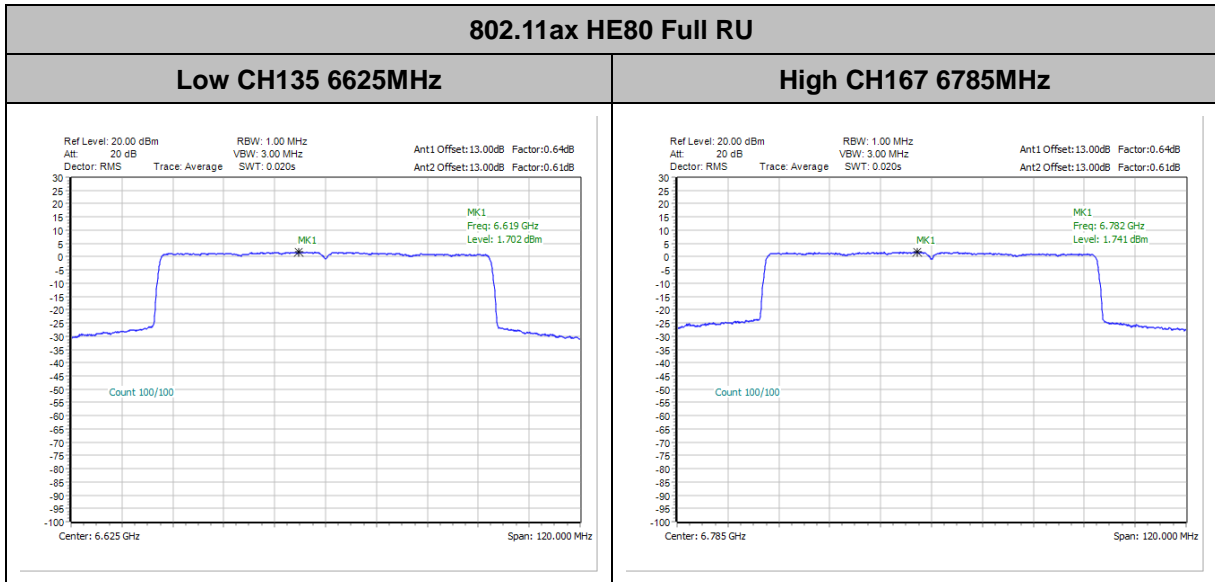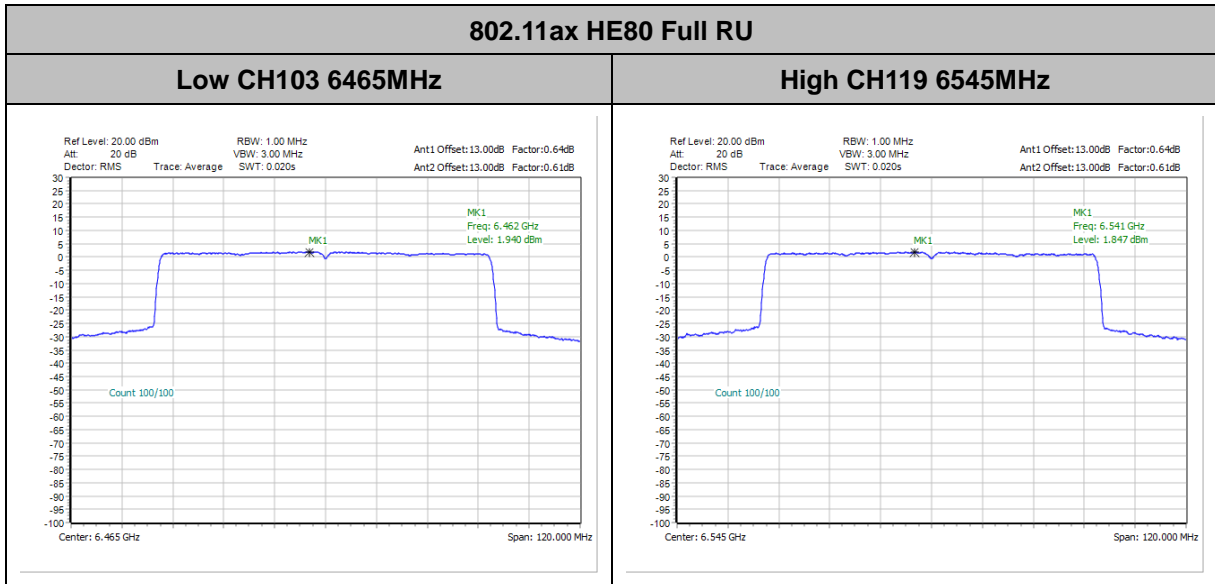


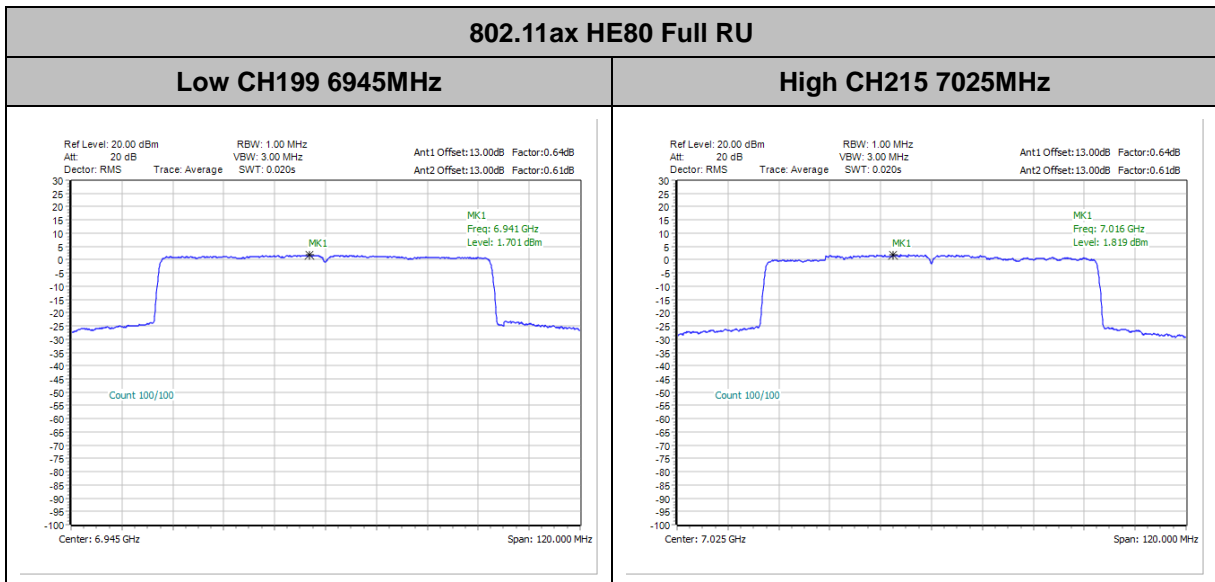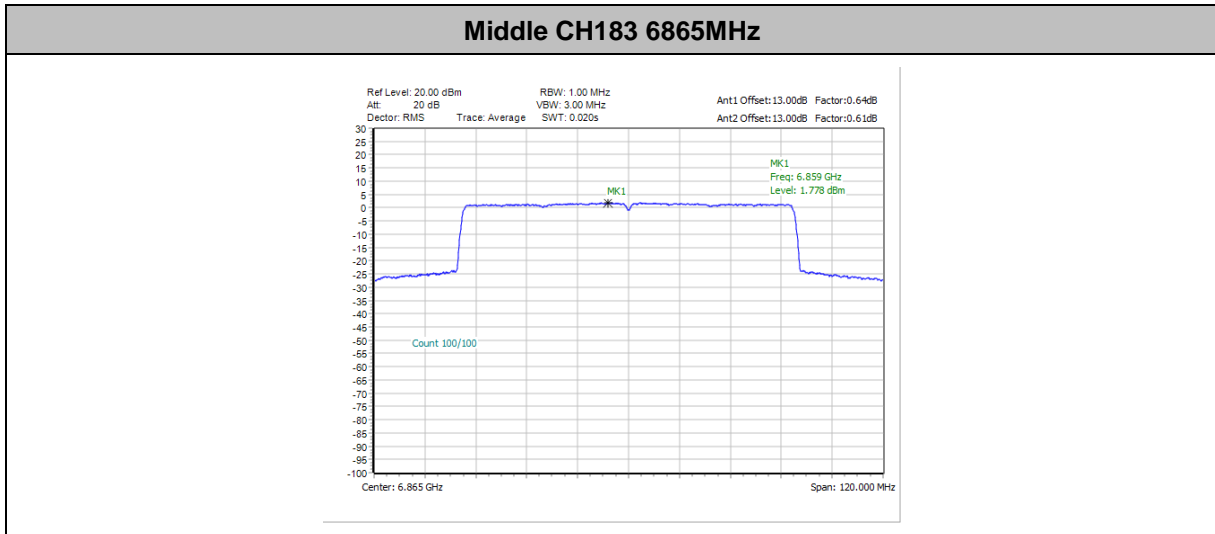




802.11ax HE20 Partial RU


Low CH01 5955MHz 26RU0

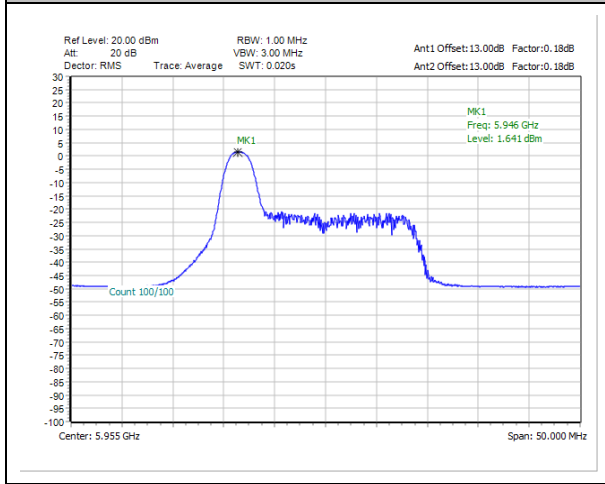


High CH229 7095MHz 26RU8

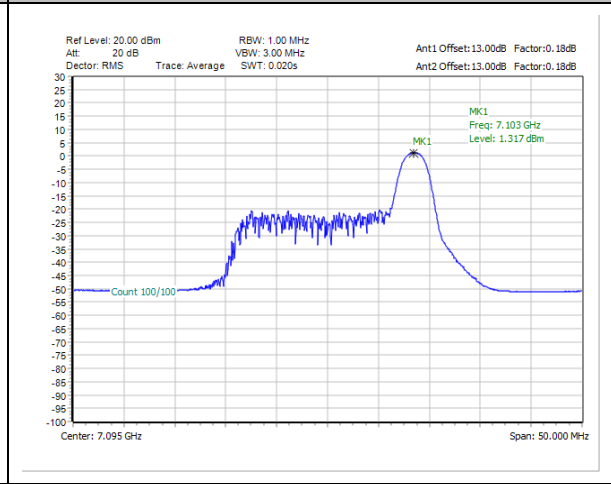


Low CH01 5955MHz 52RU37

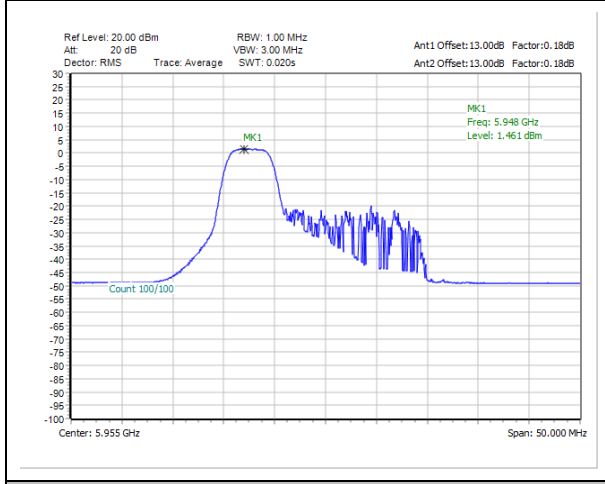


High CH229 7095MHz 52RU40

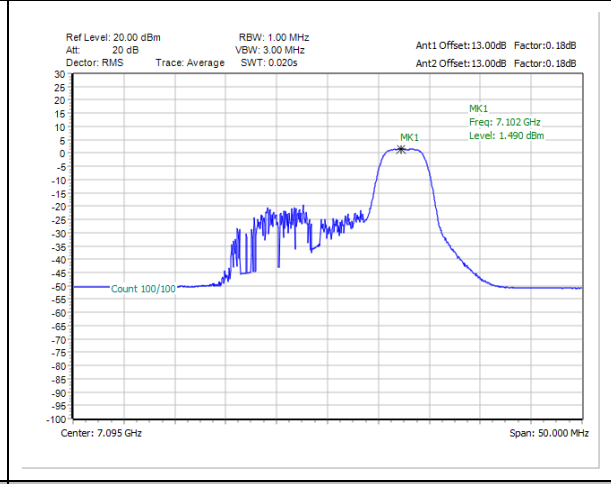

Low CH01 5955MHz 106RU53

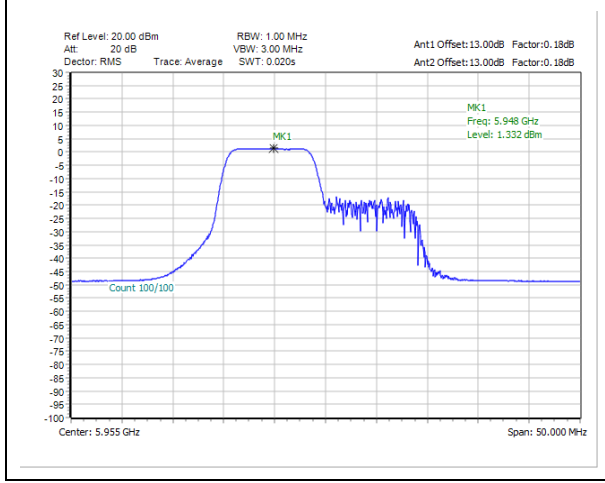

High CH229 7095MHz 106RU54

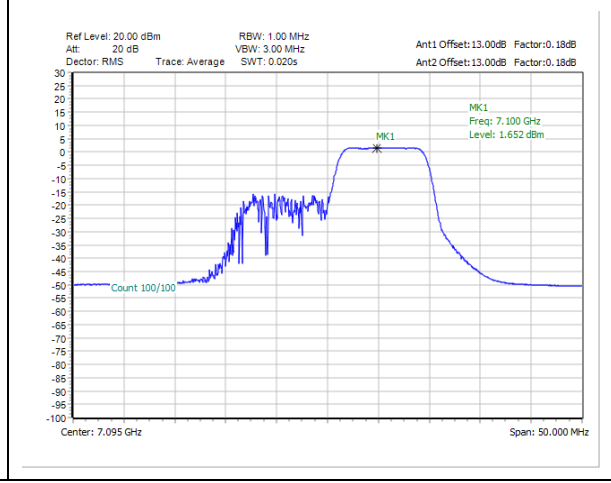





## 3.4 In-Band Emissions (Channel Mask)

### 3.4.1 Limit of Unwanted Emissions

#### <FCC 14-30 CFR 15.407>

(b)(6) For transmitters operating within the 5.925-7.125 GHz bands: Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

### 3.4.2 Measuring Instruments

See list of measuring equipment of this test report.

### 3.4.3 Test Procedures


The testing follows FCC KDB 987594 D02 U-NII 6GHz EMC Measurement.

Section J) In-Band Emissions.

1. Take nominal bandwidth as reference channel bandwidth provided that 26 dB emission bandwidth is always larger than nominal bandwidth
2. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:
  - a) Set the span to encompass the entire 26 dB EBW of the signal.
  - b) Set RBW = same RBW used for 26 dB EBW measurement.
  - c) Set VBW  $\geq 3 \times$  RBW
  - d) Number of points in sweep  $\geq [2 \times \text{span} / \text{RBW}]$ .
  - e) Sweep time = auto.
  - f) Detector = RMS (i.e., power averaging)
  - g) Trace average at least 100 traces in power averaging (rms) mode.
  - h) Use the peak search function on the instrument to find the peak of the spectrum.
3. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:
  - a. Suppressed by 20 dB at 1 MHz outside of the channel edge.
  - b. Suppressed by 28 dB at one channel bandwidth from the channel center.

- c. Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
4. Adjust the span to encompass the entire mask as necessary.
5. Clear trace.
6. Trace average at least 100 traces in power averaging (rms) mode.
7. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

### 3.4.4 Test Setup

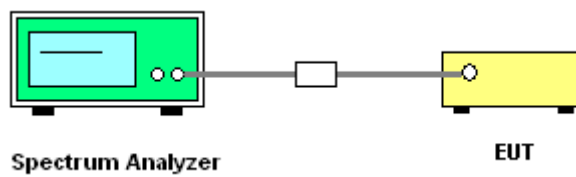




3.4.5 Test Result

MIMO <Ant. 7+5(7)>


EUT Mode : 802.11ax HE20

Plot on Channel 5955MHz

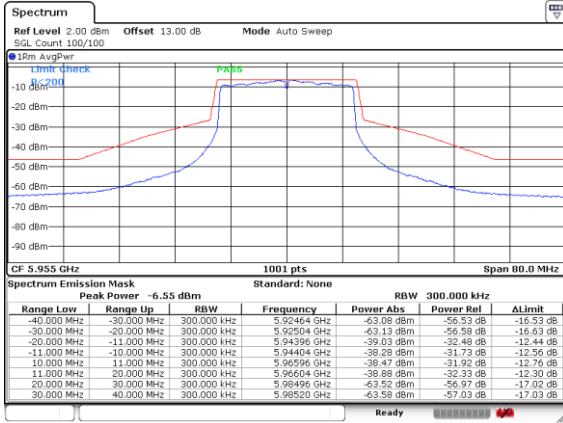


Date: 12 MAR 2024 19:36:26

Plot on Channel 6175MHz

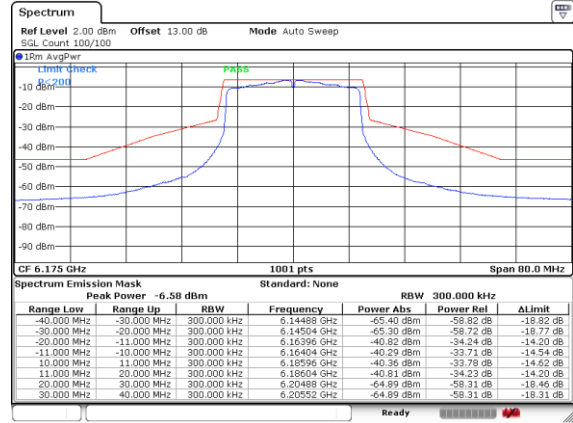


Date: 12 MAR 2024 19:39:59

Plot on Channel 6415MHz

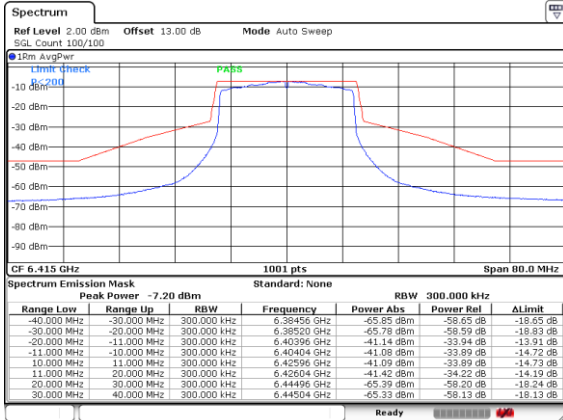

Date: 12 MAR 2024 19:41:03


Plot on Channel 6435MHz

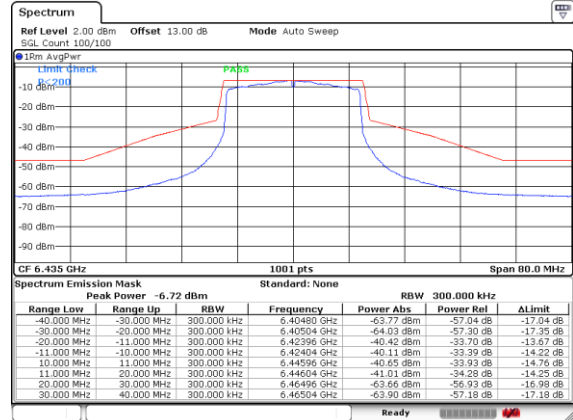

Date: 12 MAR 2024 19:50:48




Plot on Channel 6475MHz

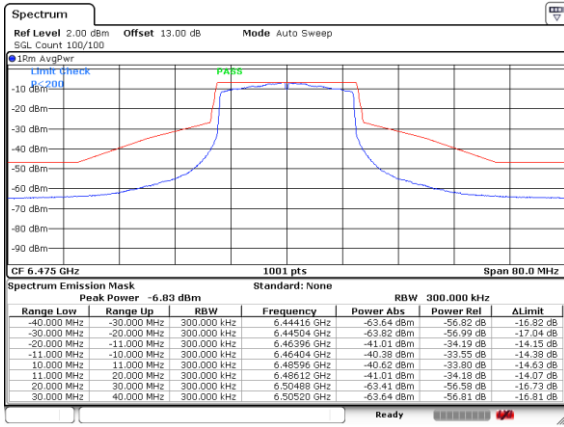


Date: 12.MAR.2024 19:51:45

Plot on Channel 6515MHz

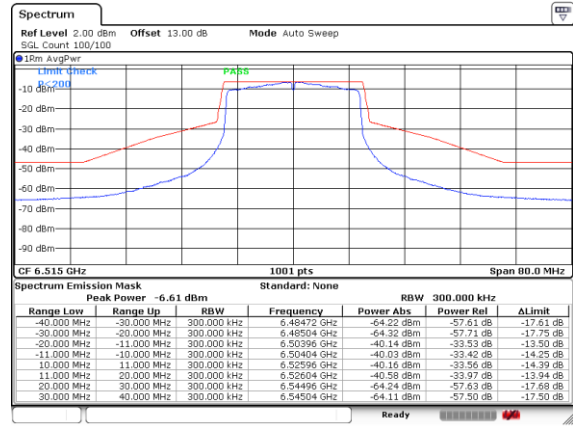


Date: 12.MAR.2024 19:55:12

Plot on Channel 6535MHz

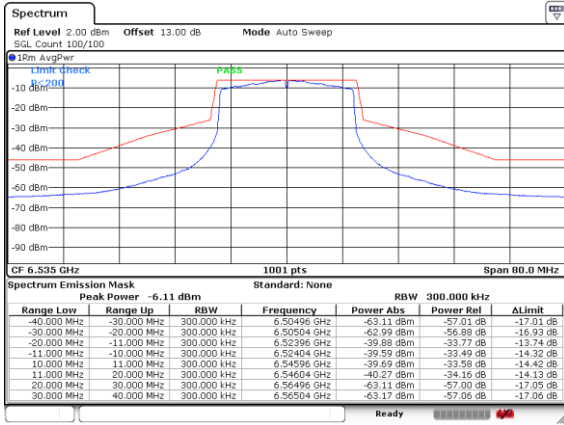

Date: 12.MAR.2024 19:57:15


Plot on Channel 6695MHz

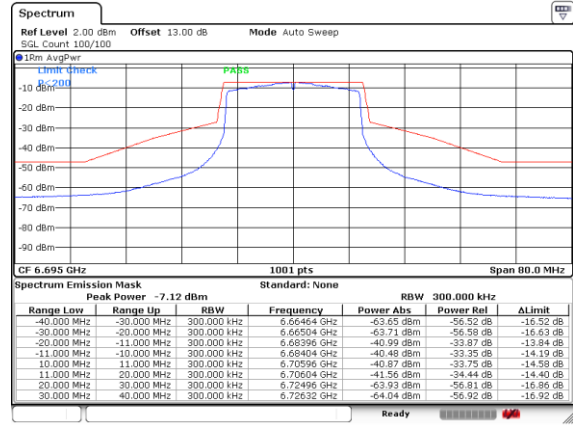

Date: 12.MAR.2024 20:01:14




Plot on Channel 6855MHz

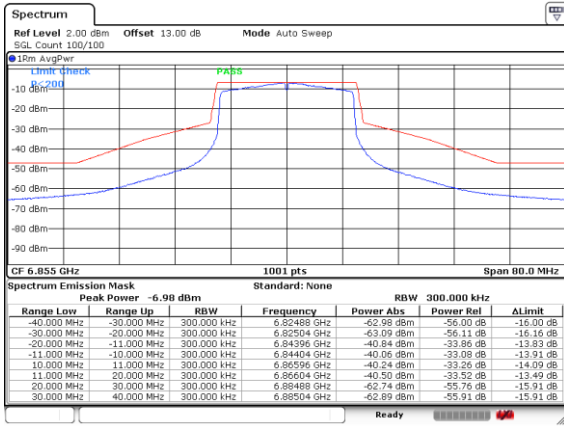


Date: 12.MAR.2024 20:02:02

Plot on Channel 6875MHz

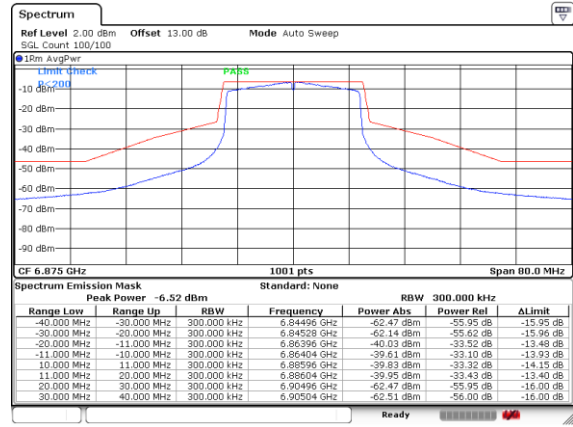


Date: 12.MAR.2024 20:04:46

Plot on Channel 6895MHz

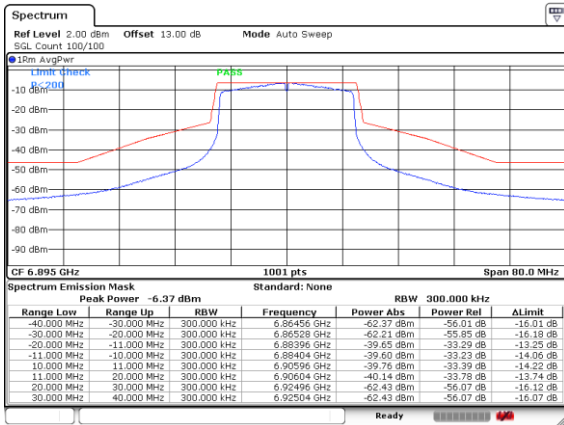


Date: 12.MAR.2024 20:08:50

Plot on Channel 6995MHz

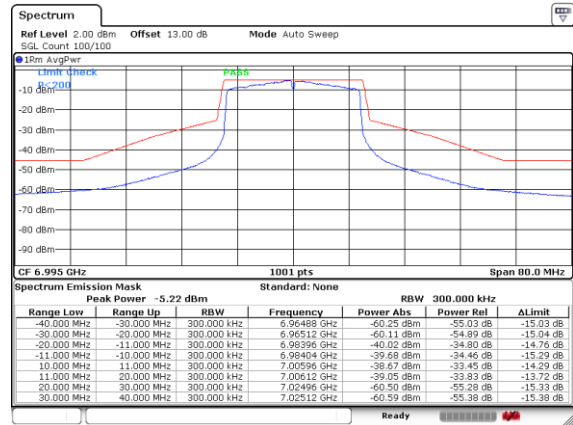

Date: 12.MAR.2024 20:13:06

Plot on Channel 7095MHz

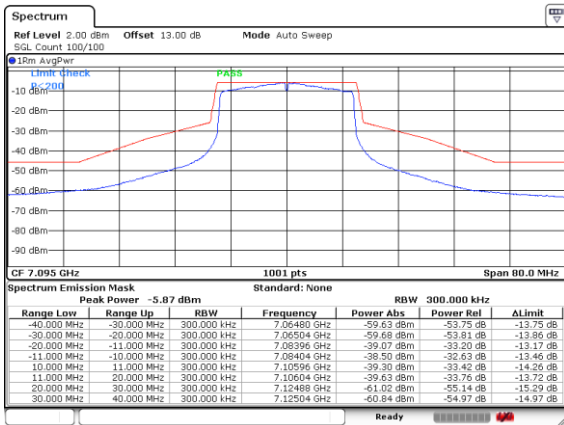


Date: 12.MAR.2024 20:14:06




EUT Mode : 802.11ax HE40

Plot on Channel 5965MHz

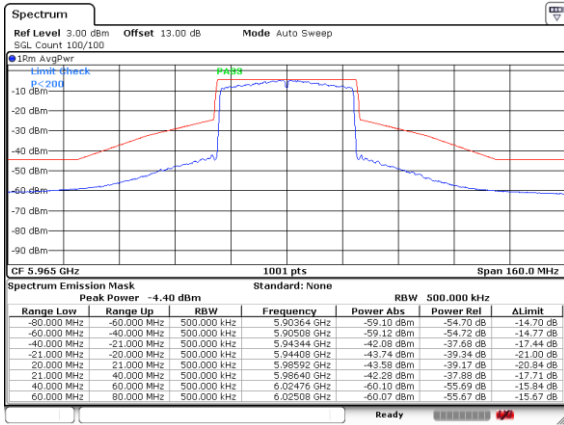


Date: 12.MAR.2024 20:28:47

Plot on Channel 6165MHz

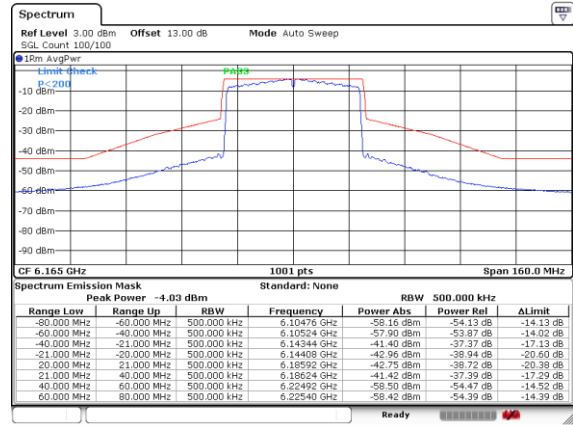


Date: 12.MAR.2024 20:29:41

Plot on Channel 6405MHz

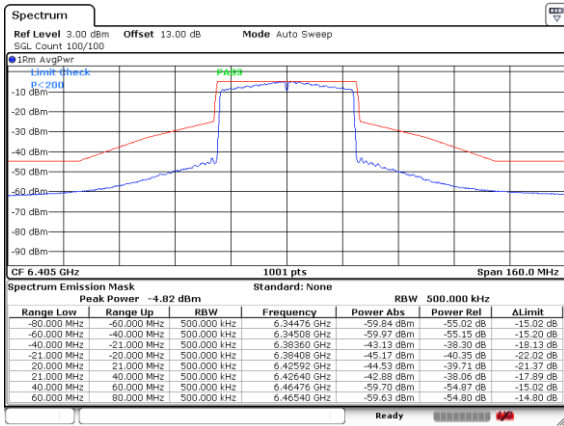

Date: 12.MAR.2024 20:32:16


Plot on Channel 6445MHz

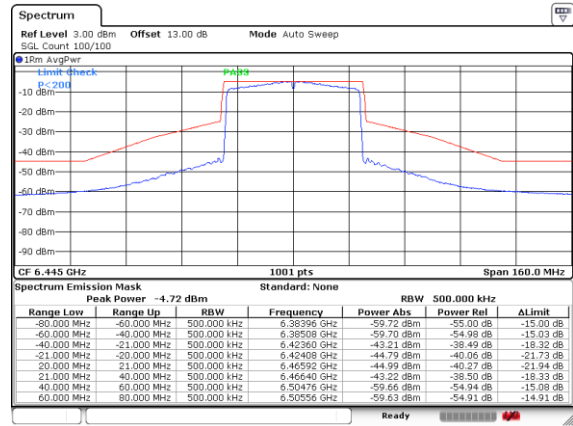

Date: 12.MAR.2024 20:33:12




Plot on Channel 6485MHz

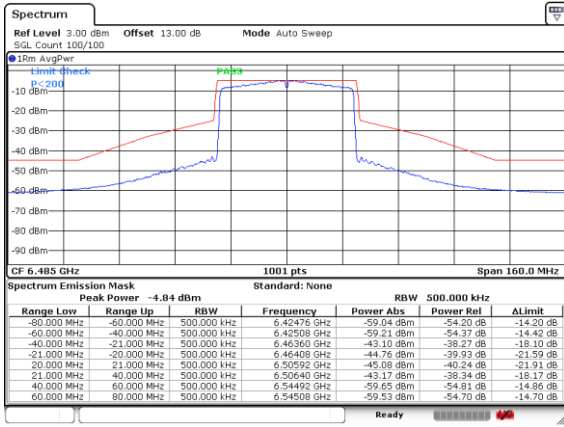


Date: 13.MAR.2024 10:20:11

Plot on Channel 6525MHz

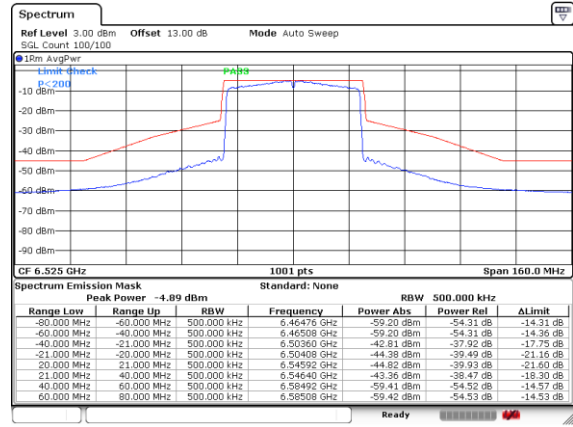


Date: 13.MAR.2024 10:21:00

Plot on Channel 6565MHz

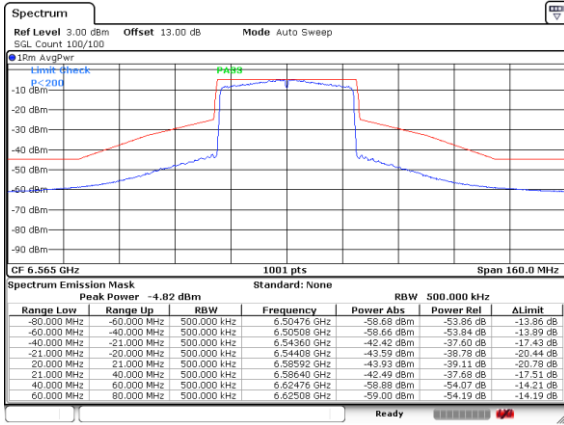

Date: 13.MAR.2024 10:45:29


Plot on Channel 6685MHz

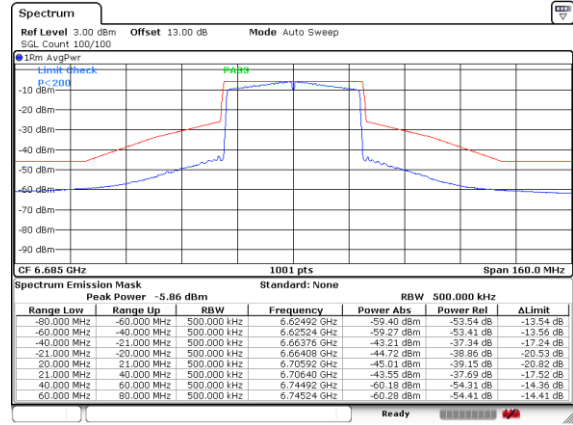

Date: 13.MAR.2024 11:45:25




Plot on Channel 6845MHz

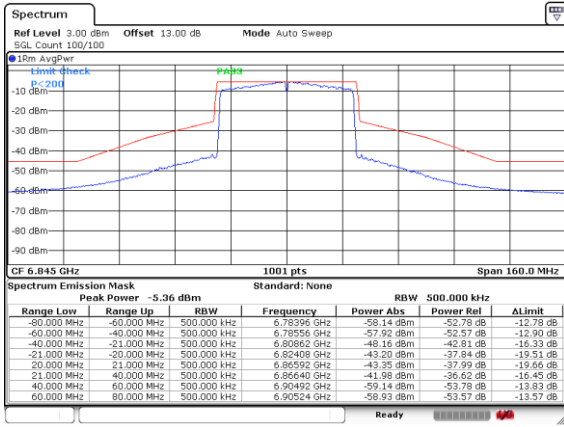


Date: 13.MAR.2024 11:52:20

Plot on Channel 6885MHz

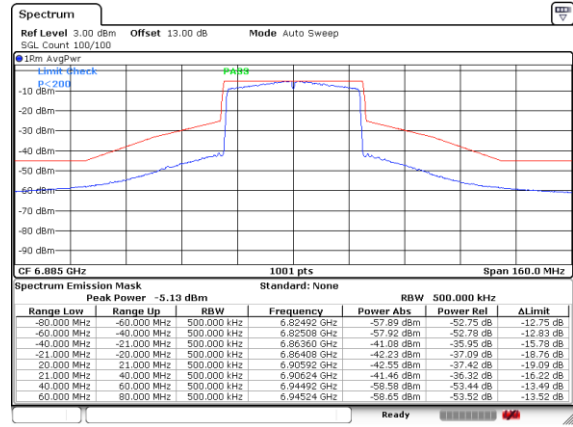


Date: 13.MAR.2024 11:56:09

Plot on Channel 6925MHz

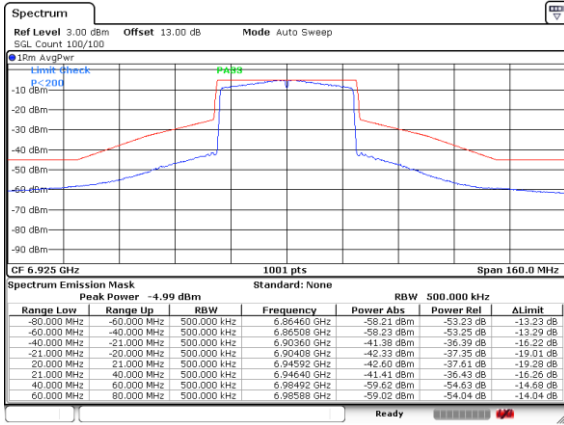


Date: 13.MAR.2024 12:02:26

Plot on Channel 6965MHz

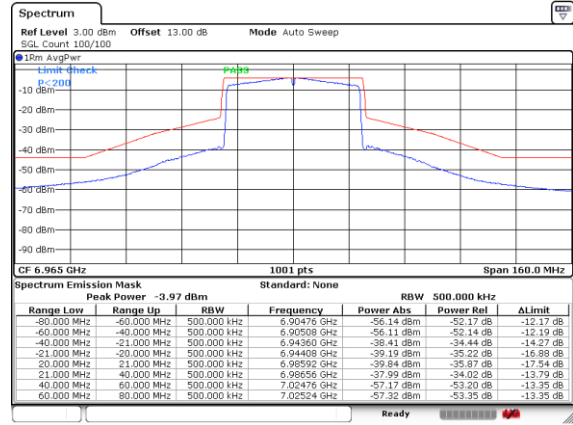

Date: 13.MAR.2024 13:17:00

Plot on Channel 7085MHz

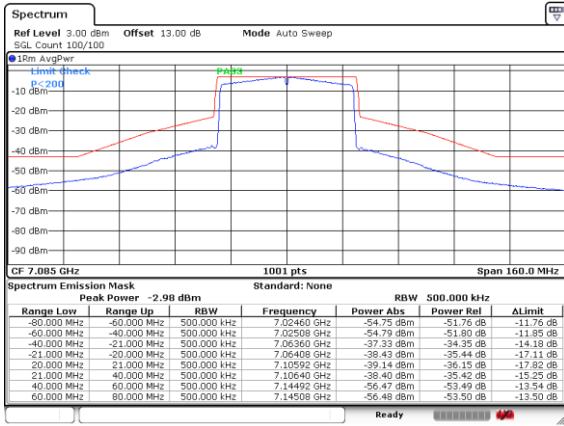


Date: 13.MAR.2024 13:17:47






EUT Mode : 802.11ax HE80

Plot on Channel 5985MHz

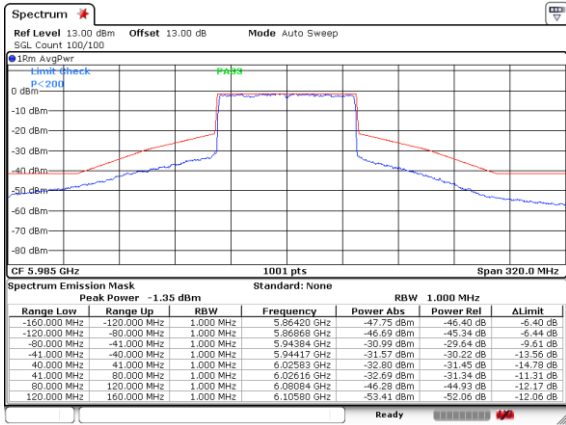


Date: 13.MAR.2024 13:30:21

Plot on Channel 6145MHz

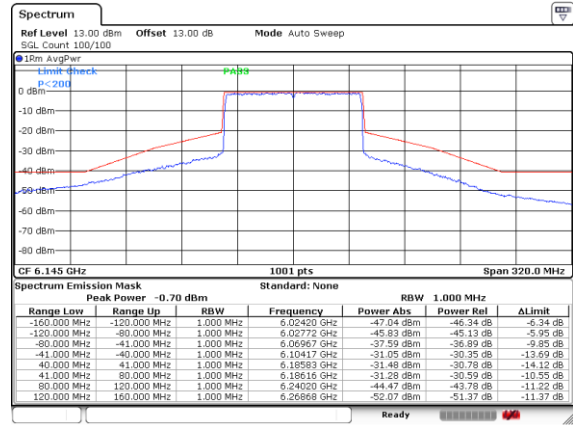


Date: 13.MAR.2024 13:31:40

Plot on Channel 6385MHz

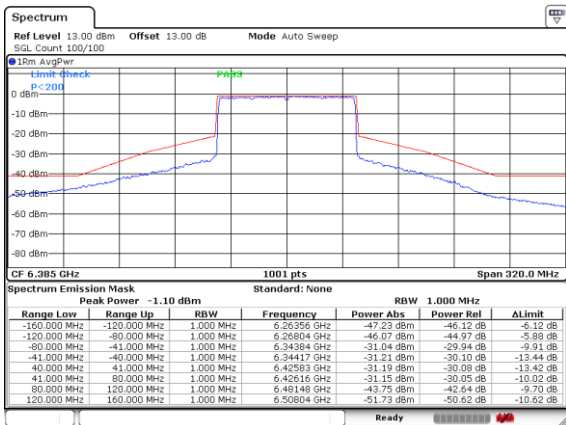

Date: 13.MAR.2024 13:38:55


Plot on Channel 6465MHz

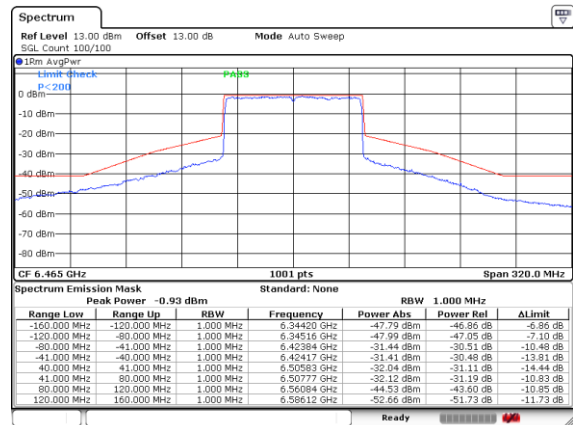


Date: 13.MAR.2024 13:39:53




Plot on Channel 6545MHz

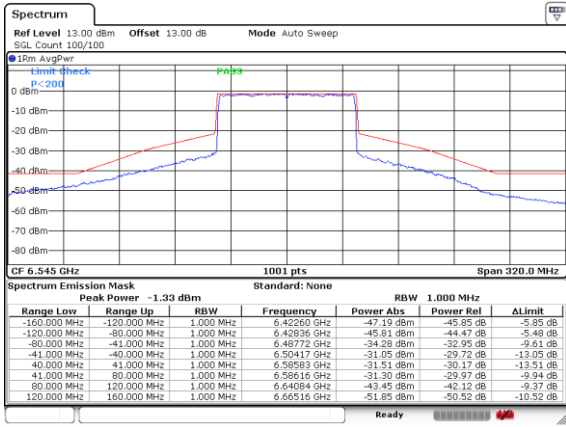


Plot on Channel 6625MHz

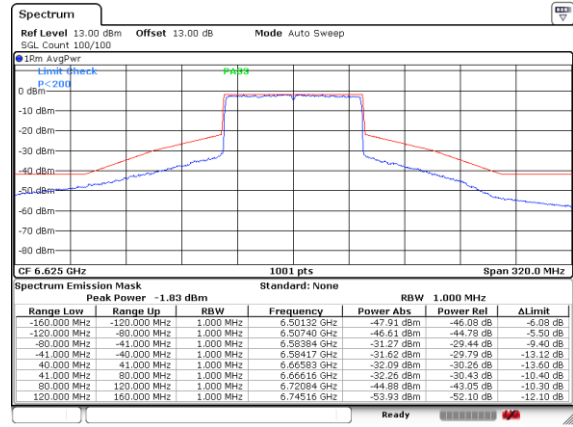


Plot on Channel 6705MHz

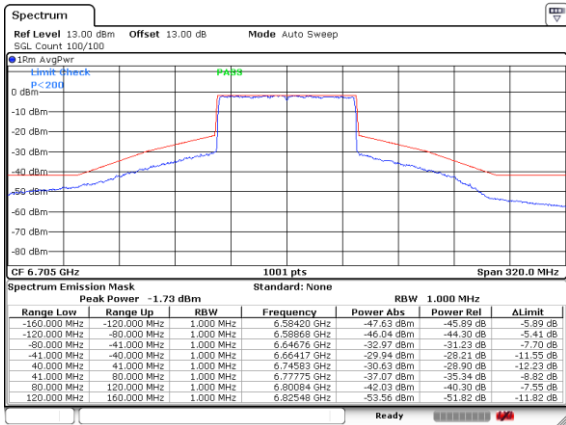


Plot on Channel 6785MHz

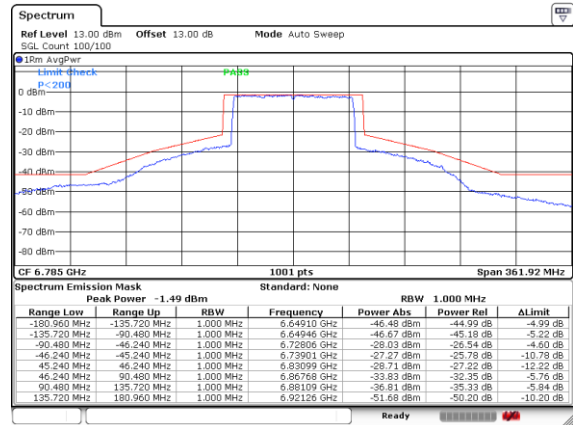

Plot on Channel 6865MHz

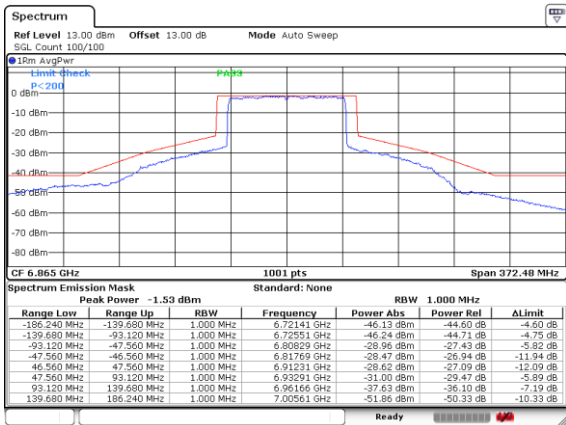


Plot on Channel 6945MHz

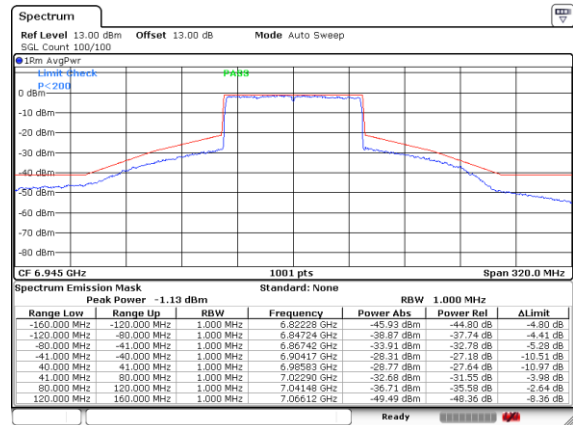



Plot on Channel 7025MHz

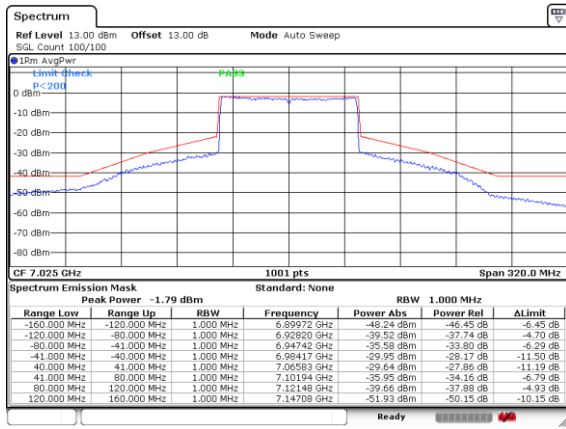


Date: 15.MAR.2024 10:22:38



<802.11ax Partial RU>


EUT Mode : 802.11ax HE20

Plot on Channel 5955MHz\_26RU0

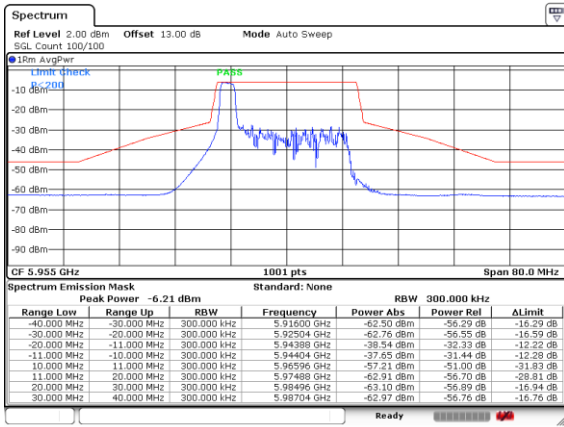


Date: 7.APR.2024 14:12:10

Plot on Channel 7095MHz\_26RU8

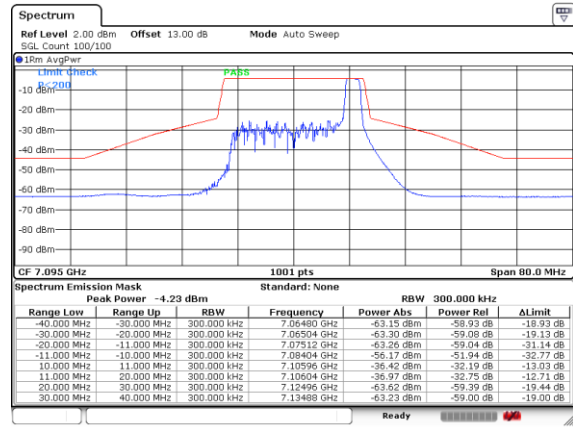


Date: 7.APR.2024 14:12:14

Plot on Channel 5955MHz\_52RU37

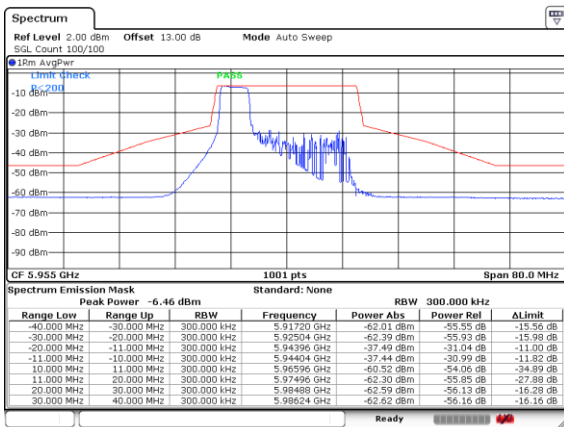


Date: 7.APR.2024 14:16:18

Plot on Channel 7095MHz\_52RU40

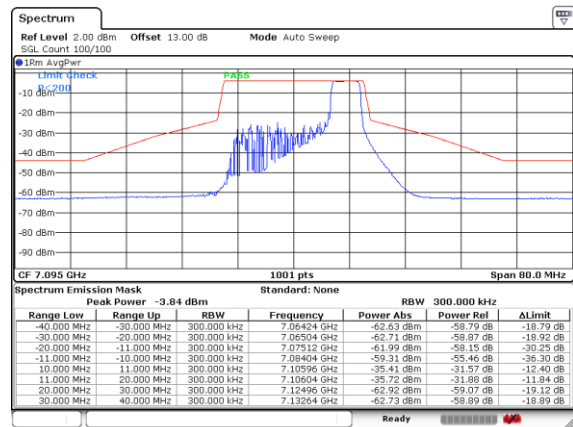


Date: 7.APR.2024 14:12:51

Plot on Channel 5955MHz\_106RU53

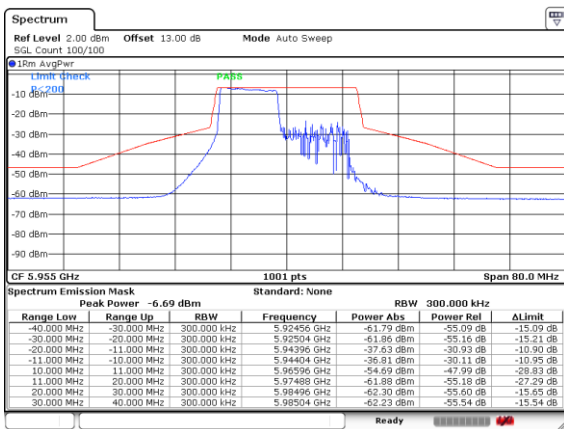

Date: 7.APR.2024 14:21:15

Plot on Channel 7095MHz\_106RU54

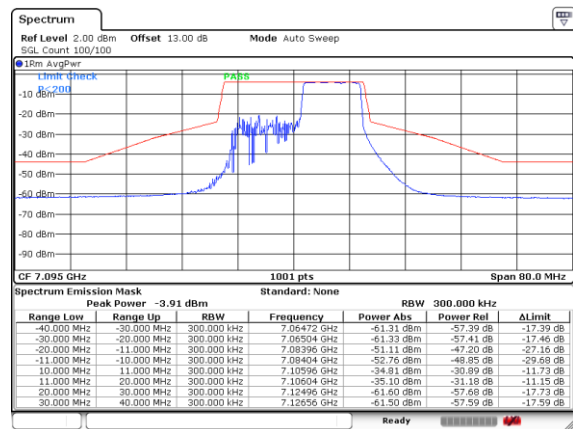


Date: 7.APR.2024 14:24:14



MIMO <Ant. 7+5(5)>


EUT Mode : 802.11ax HE20

Plot on Channel 5955MHz

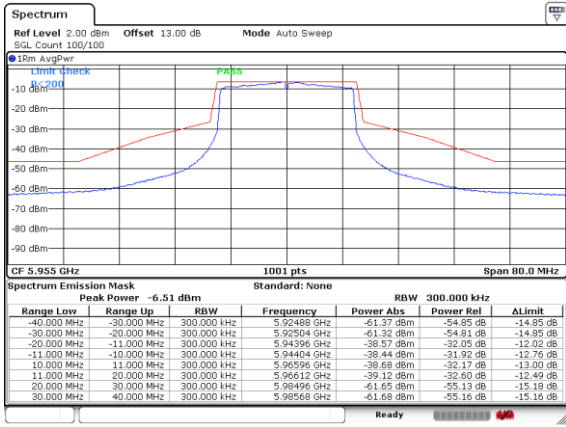


Date: 12.MAR.2024 19:37:13

Plot on Channel 6175MHz

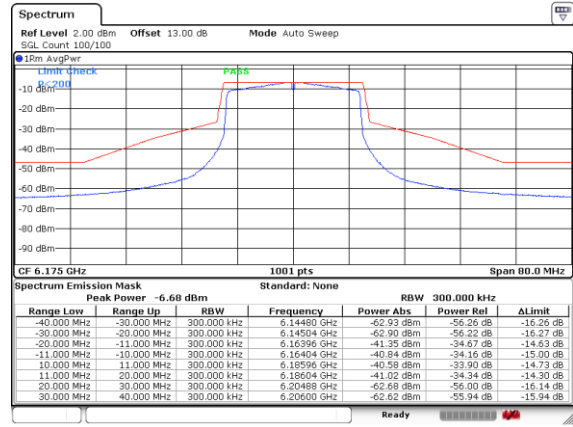


Date: 12.MAR.2024 19:39:11

Plot on Channel 6415MHz

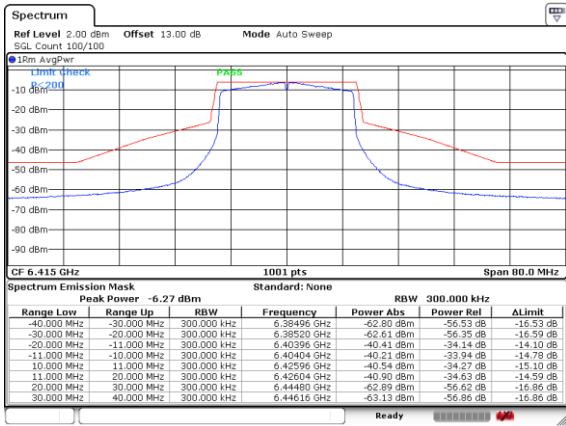

Date: 12.MAR.2024 19:45:59


Plot on Channel 6435MHz

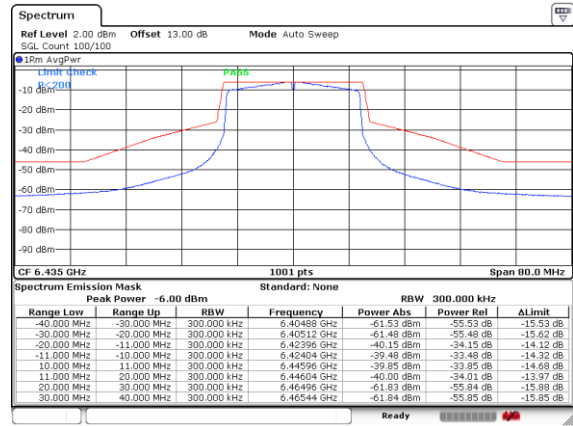

Date: 12.MAR.2024 19:49:12




Plot on Channel 6475MHz

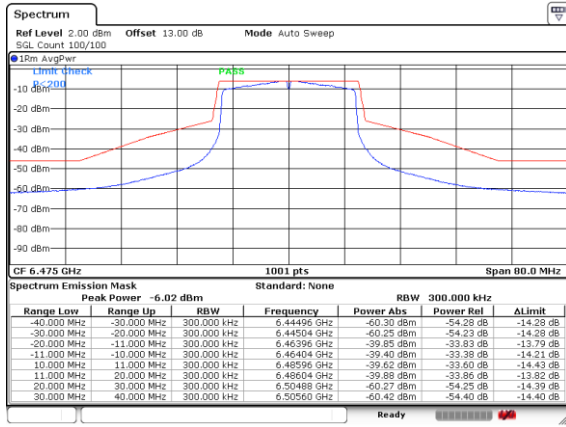


Date: 12.MAR.2024 19:52:51

Plot on Channel 6515MHz

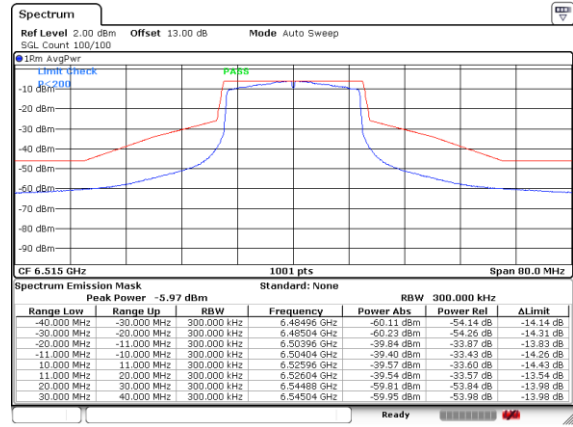


Date: 12.MAR.2024 19:54:38

Plot on Channel 6535MHz

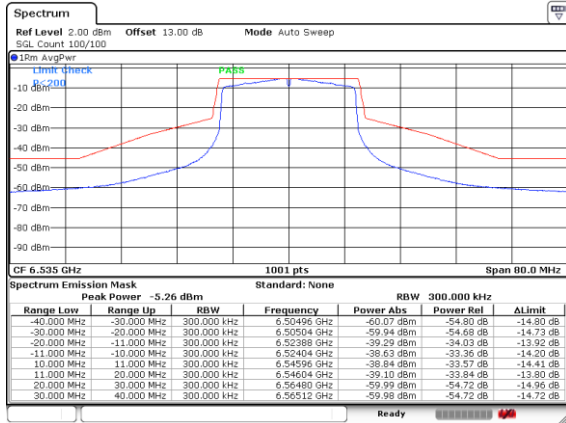

Date: 12.MAR.2024 19:58:34


Plot on Channel 6695MHz

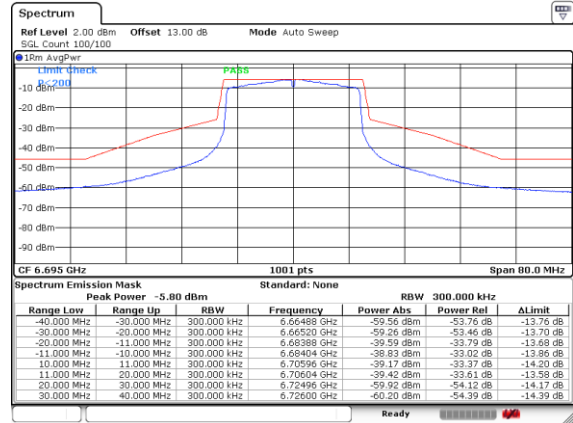

Date: 12.MAR.2024 20:00:37




Plot on Channel 6855MHz

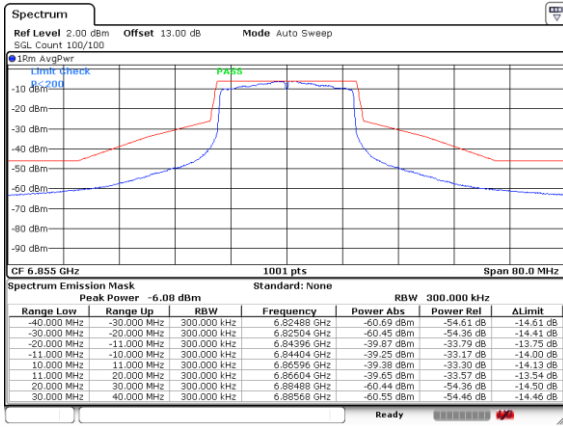


Date: 12.MAR.2024 20:02:51

Plot on Channel 6875MHz

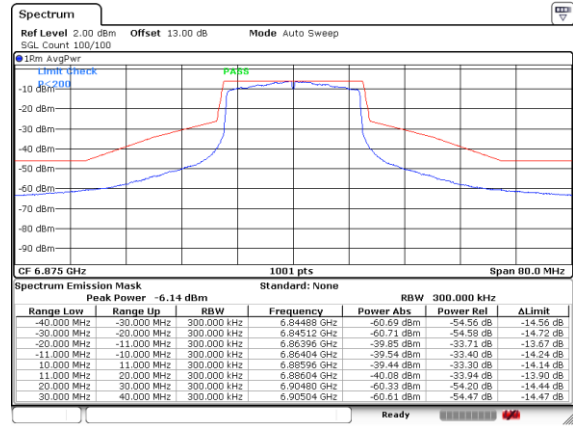


Date: 12.MAR.2024 20:04:17

Plot on Channel 6895MHz

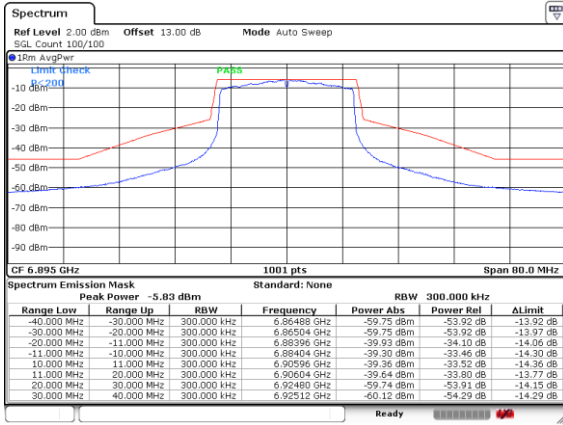


Date: 12.MAR.2024 20:09:38

Plot on Channel 6995MHz

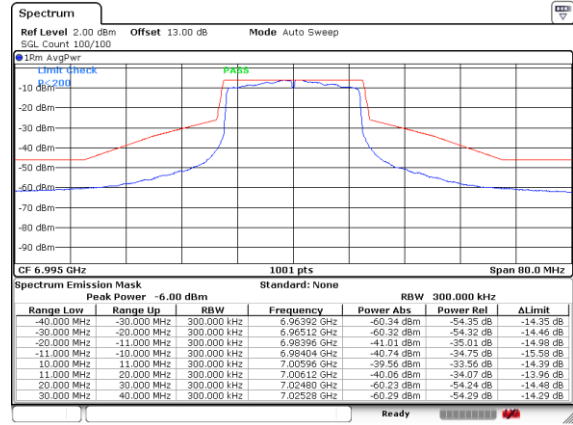

Date: 12.MAR.2024 20:12:19

Plot on Channel 7095MHz

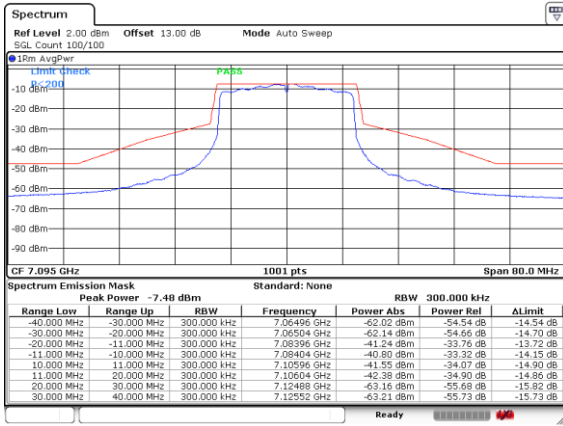


Date: 12.MAR.2024 20:15:10




EUT Mode : 802.11ax HE40

Plot on Channel 5965MHz

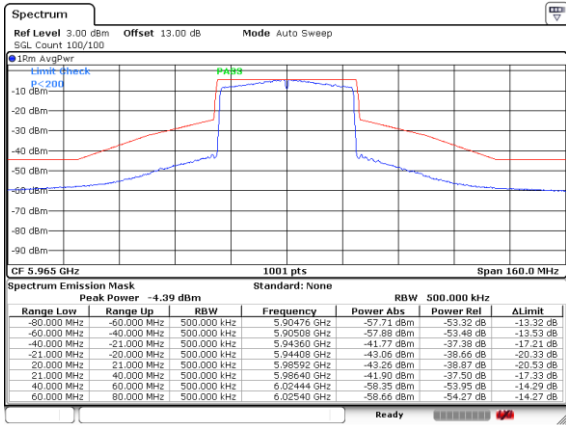


Date: 12.MAR.2024 20:21:08

Plot on Channel 6165MHz

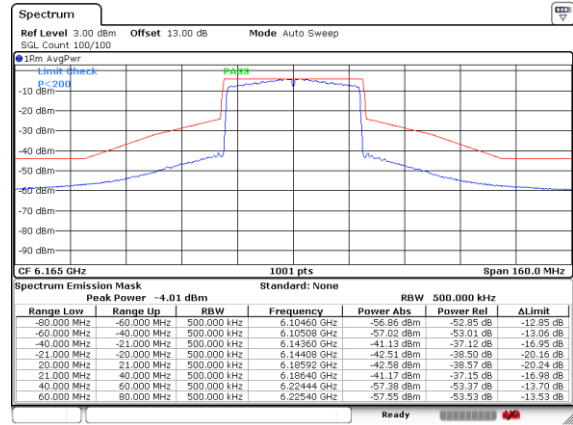


Date: 12.MAR.2024 20:30:31

Plot on Channel 6405MHz

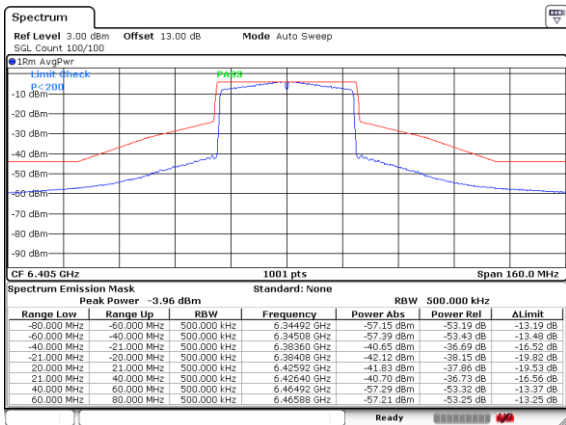

Date: 12.MAR.2024 20:31:48

Plot on Channel 6445MHz

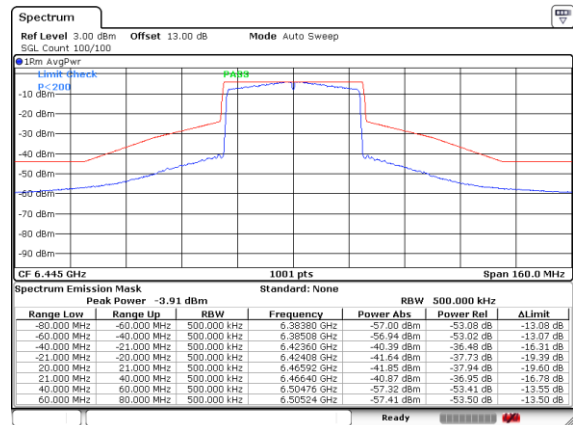


Date: 12.MAR.2024 20:34:09






Plot on Channel 6485MHz

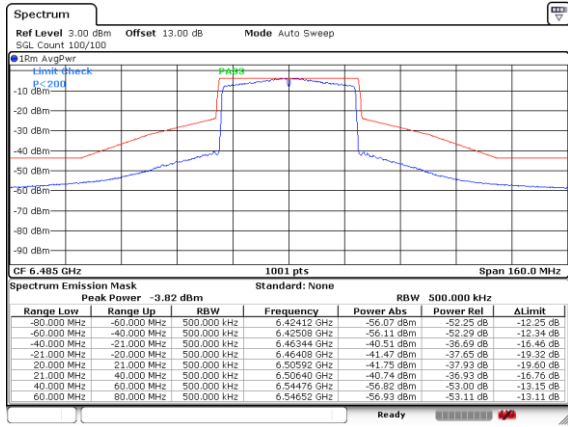


Date: 13.MAR.2024 10:19:30

Plot on Channel 6525MHz

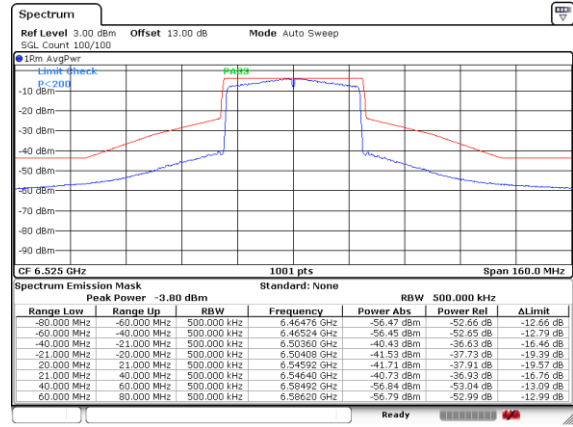


Date: 13.MAR.2024 10:28:49

Plot on Channel 6565MHz

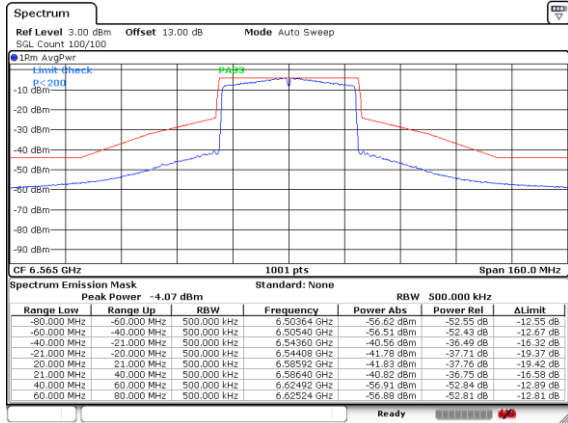

Date: 13.MAR.2024 10:44:55


Plot on Channel 6685MHz

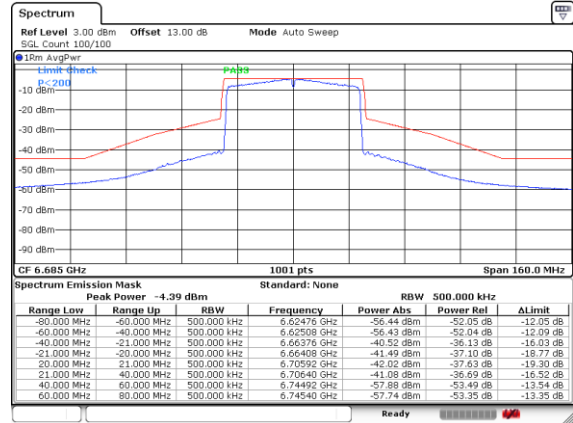

Date: 13.MAR.2024 11:47:53




Plot on Channel 6845MHz

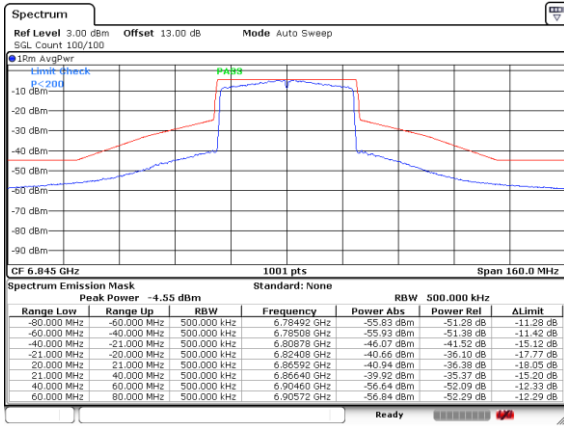


Date: 13.MAR.2024 11:51:56

Plot on Channel 6885MHz

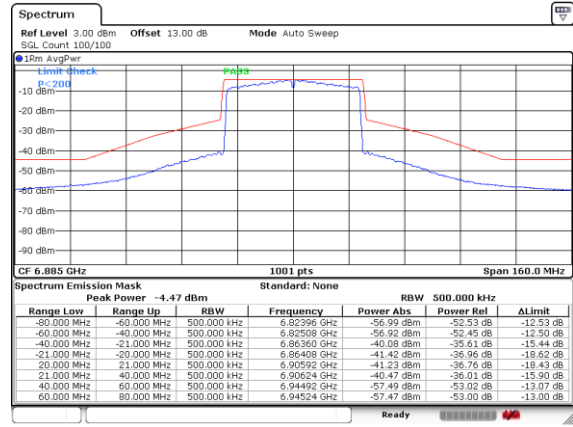


Date: 13.MAR.2024 11:57:59

Plot on Channel 6925MHz

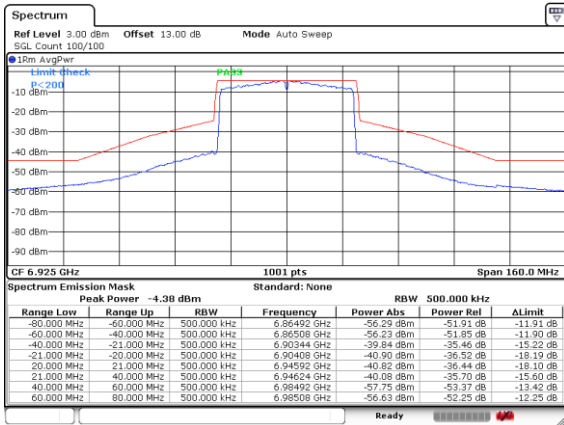


Date: 13.MAR.2024 12:03:53

Plot on Channel 6965MHz

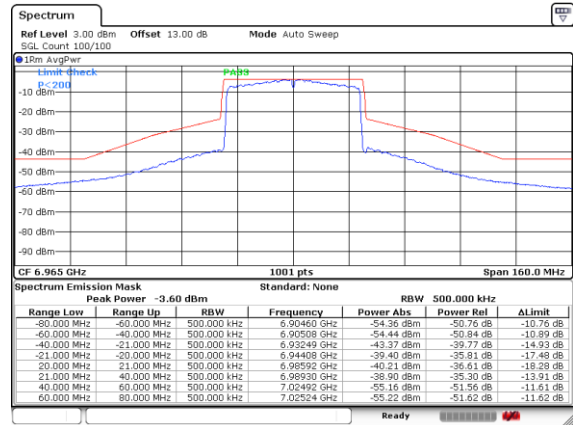

Date: 13.MAR.2024 13:08:22

Plot on Channel 7085MHz

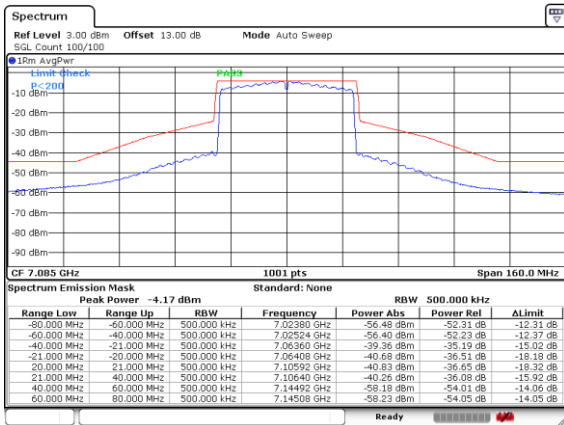

Date: 13.MAR.2024 13:20:05