

# FCC RF Test Report

APPLICANT : Motorola Mobility LLC  
EQUIPMENT : Mobile Phone  
BRAND NAME : Motorola  
MODEL NAME : XT2433-2, XT2433-1  
FCC ID : IHDT56AS4  
STANDARD : 47 CFR Part 2, Part 27 Subpart Q  
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)  
TEST DATE(S) : May 07, 2024 ~ Jun. 25, 2024

We, Sporton International Inc. (KunShan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (Shenzhen).

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (KunShan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



**Sporton International Inc. (Kunshan)**

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY..... 3
SUMMARY OF TEST RESULT ..... 4
1 GENERAL DESCRIPTION ..... 5
1.1 Applicant ..... 5
1.2 Manufacturer ..... 5
1.3 Product Feature of Equipment Under Test ..... 5
1.4 Product Specification of Equipment Under Test ..... 5
1.5 Modification of EUT ..... 6
1.6 Maximum EIRP Power and Emission Designator ..... 6
1.7 Testing Site ..... 7
1.8 Test Software ..... 7
1.9 Applied Standards ..... 8
1.10 Specification of Accessory ..... 8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 9
2.1 Test Mode ..... 9
2.2 Connection Diagram of Test System ..... 10
2.3 Support Unit used in test configuration and system ..... 10
2.4 Measurement Results Explanation Example ..... 10
2.5 Frequency List of Low/Middle/High Channels ..... 11
3 CONDUCTED TEST ITEMS ..... 12
3.1 Measuring Instruments ..... 12
3.2 Test Setup ..... 12
3.3 Test Result of Conducted Test ..... 12
3.4 Conducted Output Power Measurement ..... 13
3.5 Peak-to-Average Ratio ..... 14
3.6 EIRP ..... 15
3.7 Occupied Bandwidth ..... 16
3.8 Conducted Band Edge Measurement ..... 17
3.9 Conducted Spurious Emission Measurement ..... 18
3.10 Frequency Stability Measurement ..... 19
4 RADIATED TEST ITEMS ..... 20
4.1 Measuring Instruments ..... 20
4.2 Test Setup ..... 20
4.3 Test Result of Radiated Test ..... 21
4.4 Radiated Spurious Emission Measurement ..... 22
5 LIST OF MEASURING EQUIPMENT ..... 23
6 MEASUREMENT UNCERTAINTY ..... 24
APPENDIX A. TEST RESULTS OF CONDUCTED TEST
APPENDIX B. TEST RESULTS OF RADIATED TEST
APPENDIX C. TEST SETUP PHOTOGRAPHS



### REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG422904I	Rev. 01	Initial issue of report	Jul. 26, 2024



### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	—	PASS	
3.5	§27.50 (k)(4)	Peak-to-Average Ratio	<13dB	PASS	
3.6	§27.50 (k)(3)	EIRP	EIRP < 1W (30dBm)	PASS	-
3.7	§2.1049	Occupied Bandwidth	—	PASS	
3.8	§2.1051 §27.53 (n)(2)	Conducted Band Edge Measurement	-13dBm/MHz	PASS	-
3.9	§2.1051 §27.53 (n)(2)	Conducted Spurious Emission	-13dBm/MHz	PASS	-
3.10	§2.1055 §27.54	Frequency Stability Temperature & Voltage	Within the band	PASS	-
4.4	§2.1053 §27.53 (n)(2)	Radiated Spurious Emission	-13dBm/MHz	PASS	Under limit 31.34 dB at 10354.00 MHz

**Conformity Assessment Condition:**

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

# 1 General Description

## 1.1 Applicant

**Motorola Mobility LLC**  
 222 W, Merchandise Mart Plaza, Chicago, IL60654 USA

## 1.2 Manufacturer

**Motorola Mobility LLC**  
 222 W, Merchandise Mart Plaza, Chicago, IL60654 USA

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	Motorola
Model Name	XT2433-2, XT2433-1
FCC ID	IHDT56AS4
IMEI Code	Conducted: 356304130045015/356304130015023 Radiation: 356304130082957/ 356304130122761
HW Version	DVT2
SW Version	UOA34.101
EUT Stage	Identical Prototype

**Remark:**

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. The two models are only different for market segment, all the others are same.

## 1.4 Product Specification of Equipment Under Test

Product Feature	
Tx/Rx Frequency	5G NR n78: 3450 MHz ~ 3550 MHz
SCS	30kHz
Bandwidth	n78(30kHz): 10 / 15 / 20 / 25 / 30 / 40 / 50 / 60 / 70 / 80 / 90 / 100MHz
Antenna Gain	<Ant. 1> 5G NR n78: -3.10 dBi <Ant. 2> 5G NR n78: -5.20 dBi <Ant. 5> 5G NR n78: -3.50 dBi <Ant. 8> 5G NR n78: -4.42 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

**Remark:**

1. The maximum EIRP is calculated from max output power and max antenna gain, only the maximum EIRP of ANT 5 is shown in the report.
2. 5G NR n78 support SA and NSA mode. The whole testing has assessed SA mode for n78 by referring to the higher conducted power for conducted test items.
3. All the supported EN-DC combinations are verified conducted power, only the EN-DC combination with highest power are shown in the report.
4. The EN-DC mode combination could be referred to the product spec.

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Maximum EIRP Power and Emission Designator

5G NR n78		PI/2 BPSK / QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	3455.01 ~ 3544.98	0.1019	8M56G7D	0.0879	8M58W7D
15	3457.50 ~ 3542.49	0.1009	13M6G7D	0.0853	13M7W7D
20	3460.02 ~ 3540.00	0.1014	18M3G7D	0.0783	18M3W7D
25	3462.51 ~ 3537.48	0.1023	23M2G7D	0.0879	23M3W7D
30	3465.00 ~ 3534.99	0.1016	27M9G7D	0.0804	27M9W7D
40	3470.01 ~ 3529.98	0.1019	38M0G7D	0.0785	37M9W7D
50	3475.02 ~ 3525.00	0.1033	47M5G7D	0.0885	47M5W7D
60	3480.00 ~ 3519.99	0.1067	57M9G7D	0.0822	57M9W7D
70	3485.01 ~ 3514.98	0.1052	67M9G7D	0.0861	68M1W7D
80	3490.02 ~ 3510.00	0.1067	77M5G7D	0.0883	77M6W7D
90	3495.00 ~ 3504.99	0.1050	87M4G7D	0.0906	87M6W7D
100	3500.01	0.1023	97M1G7D	0.0838	97M1W7D

**Note:** All modulations have been tested, and only the worst test results are shown in the report.

### 1.7 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

<b>Test Firm</b>	Sporton International Inc. (Kunshan)		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	TH01-KS	CN1257	314309

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

<b>Test Firm</b>	Sporton International Inc. (ShenZhen)		
<b>Test Site Location</b>	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	03CH03-SZ	CN1256	421272

### 1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH03-SZ	AUDIX	E3	6.2009-8-24

## 1.9 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, Part 27 Subpart Q
- ANSI C63.26-2015
- FCC KDB 971168 Power Meas License Digital Systems D01 v03r01
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

## 1.10 Specification of Accessory

Specification of Accessory				
AC Adapter 1(US)	Brand Name	Motorola(AOHAI)	Model Name	MC-201L
AC Adapter 1(EU)	Brand Name	Motorola(AOHAI)	Model Name	MC-202L
AC Adapter 1(UK)	Brand Name	Motorola(AOHAI)	Model Name	MC-203L
AC Adapter 1(IN)	Brand Name	Motorola(AOHAI)	Model Name	MC-204
AC Adapter 1(AU)	Brand Name	Motorola(AOHAI)	Model Name	MC-205L
AC Adapter 1(AR)	Brand Name	Motorola(AOHAI)	Model Name	MC-206L
AC Adapter 2(US)	Brand Name	Motorola(Salcomp)	Model Name	MC-201L
AC Adapter 2(EU)	Brand Name	Motorola(Salcomp)	Model Name	MC-202L
AC Adapter 2(UK)	Brand Name	Motorola(Salcomp)	Model Name	MC-203L
AC Adapter 2(AU)	Brand Name	Motorola(Salcomp)	Model Name	MC-205L
AC Adapter 2(AR)	Brand Name	Motorola(Salcomp)	Model Name	MC-206L
AC Adapter 2(BR)	Brand Name	Motorola(Salcomp)	Model Name	MC-207L
AC Adapter 2(Chile)	Brand Name	Motorola(Salcomp)	Model Name	MC-209L
AC Adapter 3(US)	Brand Name	Motorola(Chenyang)	Model Name	MC-201L
AC Adapter 3(EU)	Brand Name	Motorola(Chenyang)	Model Name	MC-202L
AC Adapter 3(AR)	Brand Name	Motorola(Chenyang)	Model Name	MC-206L
AC Adapter 3(BR)	Brand Name	Motorola(Chenyang)	Model Name	MC-207L
AC Adapter 4(BR)	Brand Name	Motorola(Cliptech)	Model Name	MC-207L
AC Adapter 5(IN)	Brand Name	Motorola(XIHI)	Model Name	MC-204
Battery 1	Brand Name	Motorola(ATL)	Model Name	QG50
Battery 2	Brand Name	Motorola(Sunwoda)	Model Name	QG50
Battery 3	Brand Name	Motorola(JIADE)	Model Name	QG50
USB Cable 1	Brand Name	Saibao	Model Name	SZN-A026A
USB Cable 2	Brand Name	Juwei	Model Name	JWUB1606-ZN01H



## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.


Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Test Cases	Band	Bandwidth (MHz)	Modulation	RB #	Test Channel
		eg. 5M, 10M, 15M, 20M	eg. PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	1RB, Partial RB, Full RB	L/M/H
Max. Output Power	5G n78	10M, 15M, 20M, 25M, 30M, 40M, 50M, 60M, 70M, 80M, 90M ,100M	All Modulations	1RB, Partial RB, Full RB	L, M, H
Peak-to-Average Ratio	5G n78	20M	PI/2 BPSK, QPSK	1RB, Full RB	M
E.I.R.P	5G n78	10M, 15M, 20M, 25M, 30M, 40M, 50M, 60M, 70M, 80M, 90M ,100M	All Modulations	1RB, Partial RB, Full RB	L, M, H
26dB and 99% Bandwidth	5G n78	10M, 15M, 20M, 25M, 30M, 40M, 50M, 60M, 70M, 80M, 90M ,100M	QPSK, 16QAM, 64QAM, 256QAM	Full RB	M
Conducted Band Edge	5G n78	10M, 50M, 100M	PI/2 BPSK, QPSK	1RB, Full RB	L, H
Conducted Spurious Emission	5G n78	10M, 50M, 100M	PI/2 BPSK, QPSK	1RB	L, M, H
Frequency Stability	5G n78	20M	PI/2 BPSK	Full RB	M
Radiated Spurious Emission	5G n78	Worst case from maximum power			M

**Note:**

1. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.
2. Frequency Stability: Normal Voltage = 3.91V ; Low Voltage =3.60V.; High Voltage =4.50V.

## 2.2 Connection Diagram of Test System

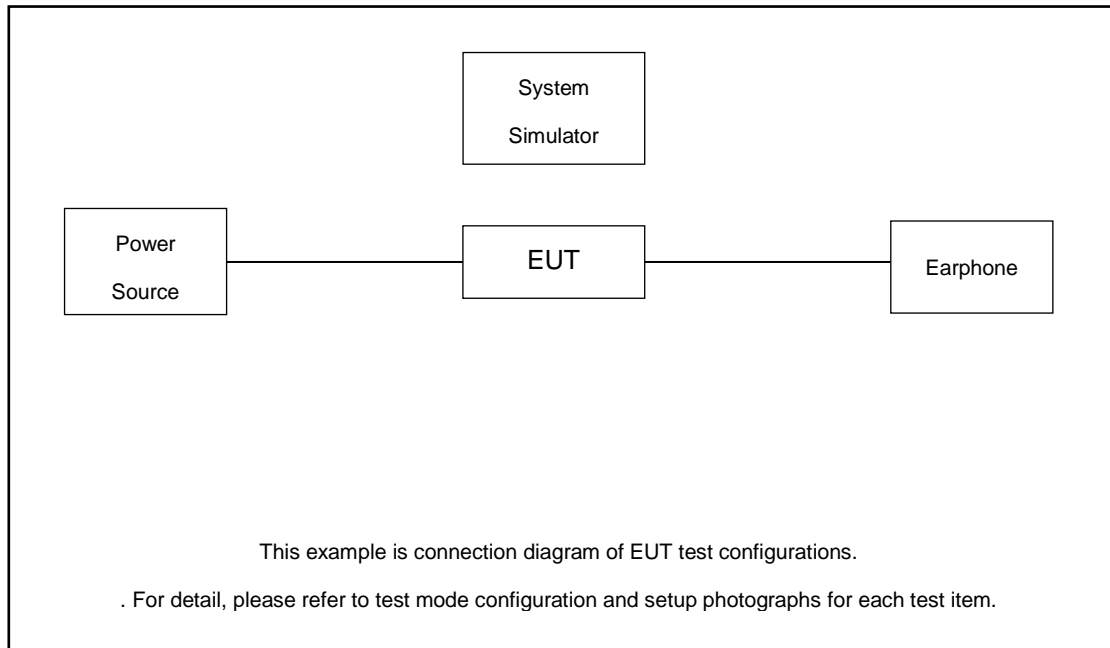

## 2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m

## 2.4 Measurement Results Explanation Example

### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 3.96 dB and 20dB attenuator.

Example :

*Offset(dB) = RF cable loss(dB) + attenuator factor(dB).*

$$= 3.96 + 20 = 23.96 \text{ (dB)}$$

## 2.5 Frequency List of Low/Middle/High Channels

5G n78 Channel and Frequency List for SCS 30kHz				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	-	633334	-
	Frequency	-	3500.01	-
90	Channel	633000	633334	633666
	Frequency	3495	3500.01	3504.99
80	Channel	632668	633334	634000
	Frequency	3490.02	3500.01	3510
70	Channel	632334	633334	634332
	Frequency	3485.01	3500.01	3514.98
60	Channel	632000	633334	634666
	Frequency	3480	3500.01	3519.99
50	Channel	631668	633334	635000
	Frequency	3475.02	3500.01	3525
40	Channel	631334	633334	635332
	Frequency	3470.01	3500.01	3529.98
30	Channel	631000	633334	635666
	Frequency	3465	3500.01	3534.99
25	Channel	630834	633334	635832
	Frequency	3462.51	3500.01	3537.48
20	Channel	630668	633334	636000
	Frequency	3460.02	3500.01	3540
15	Channel	630500	633334	636166
	Frequency	3457.5	3500.01	3542.49
10	Channel	630334	633334	636332
	Frequency	3455.01	3500.01	3544.98


### 3 Conducted Test Items

#### 3.1 Measuring Instruments


See list of measuring instruments of this test report.

#### 3.2 Test Setup


##### 3.2.1 Conducted Output Power

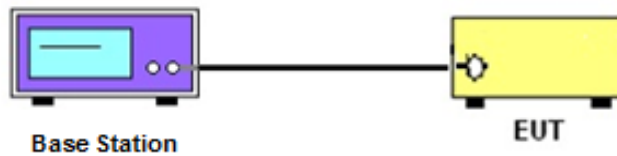

##### 3.2.2 Peak-to-Average Ratio, Occupied / 26dB Bandwidth, Band-Edge and Conducted Spurious Emission

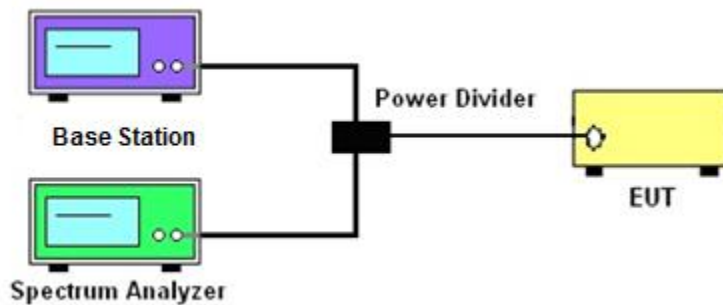

##### 3.2.3 Frequency Stability

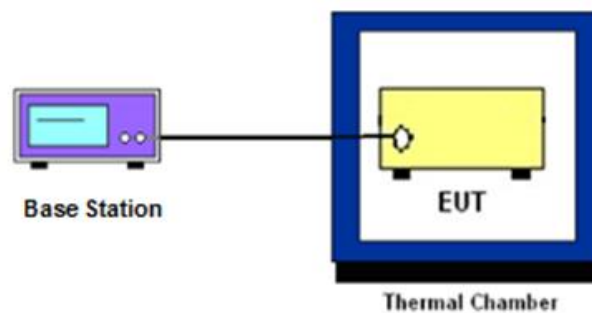

### 3.3 Test Result of Conducted Test

Please refer to Appendix A.



## **3.4 Conducted Output Power Measurement**

### **3.4.1 Description of the Conducted Output Power Measurement**

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

### **3.4.2 Test Procedures**

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

## **3.5 Peak-to-Average Ratio**

### **3.5.1 Description of the PAR Measurement**

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### **3.5.2 Test Procedures**

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.



## 3.6 EIRP

### 3.6.1 Description of EIRP Limit

#### § 27.50 (k)(3)

Mobile devices are limited to 1Watt (30 dBm) EIRP. Mobile devices operating in these bands must employ a means for limiting power to the minimum necessary for successful communications

### 3.6.2 Test Procedures

1. According to KDB 412172 D01 Power Approach,
2.  $EIRP = P_T + G_T - L_C$ ,  $ERP = EIRP - 2.15$ , where  
 $P_T$  = transmitter output power in dBm  
 $G_T$  = gain of the transmitting antenna in dBi  
 $L_C$  = signal attenuation in the connecting cable between the transmitter and antenna in dB

## 3.7 Occupied Bandwidth

### 3.7.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

### 3.7.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.  
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



## 3.8 Conducted Band Edge Measurement

### 3.8.1 Description of Conducted Band Edge Measurement

#### § 27.53 (n)(2)

For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed  $-13$  dBm/MHz.

Compliance with this paragraph is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed, but limited to a maximum of 200 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.

### 3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW  $\geq$  1% EBW but limited to a maximum of 200 kHz in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz and 5 MHz removed from the band edge, set RBW  $\geq$  500KHz.
6. Beyond the 5 MHz removed from the band edge, set RBW = 1MHz.
7. Set spectrum analyzer with RMS detector.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. Checked that all the results comply with the emission limit line.

## 3.9 Conducted Spurious Emission Measurement

### 3.9.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges shall not exceed  $-13$  dBm/MHz.

It is measured by means of a calibrated spectrum analyzer and scanned from 9 kHz up to a frequency including its 10<sup>th</sup> harmonic.

### 3.9.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. Checked that all the results comply with the emission limit line.

## 3.10 Frequency Stability Measurement

### 3.10.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

### 3.10.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  step up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

### 3.10.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5.
2. The EUT was placed in a temperature chamber at  $20\pm 5^{\circ}\text{C}$  and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.

## 4 Radiated Test Items

### 4.1 Measuring Instruments


See list of measuring instruments of this test report.

### 4.2 Test Setup

#### 4.2.1 For radiated test below 30MHz



#### 4.2.2 For radiated test from 30MHz to 1GHz

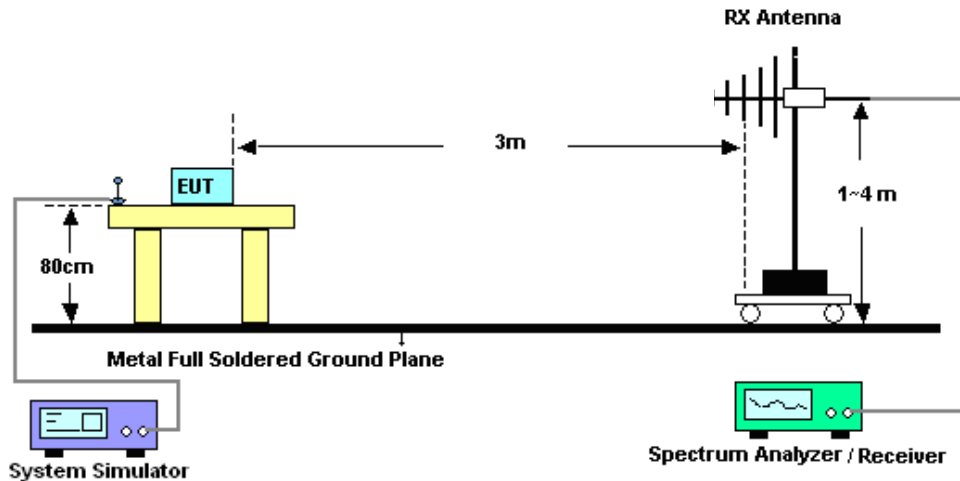

### 4.2.3 For radiated test above 1GHz



### 4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

## 4.4 Radiated Spurious Emission Measurement

### 4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI/TIA-603-E. The power of any emission outside of the authorized operating frequency ranges shall not exceed -13 dBm/MHz.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.  
$$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$
$$\text{ERP (dBm)} = \text{EIRP} - 2.15$$
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



## 5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	May 07, 2024~ May 11, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	May 07, 2024~ May 11, 2024	NCR	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 06, 2023	May 07, 2024~ May 11, 2024	Jul. 05, 2024	Conducted (TH01-KS)
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	Apr. 09, 2024	Jun. 25, 2024	Apr. 08, 2025	Radiation (03CH03-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150246	10Hz~44GHz;	Apr. 09, 2024	Jun. 25, 2024	Apr. 08, 2025	Radiation (03CH03-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jun. 28, 2022	Jun. 25, 2024	Jun. 27, 2024	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz-2GHz	Aug. 20, 2023	Jun. 25, 2024	Aug. 19, 2025	Radiation (03CH03-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1355	1GHz~18GHz	Apr. 09, 2024	Jun. 25, 2024	Apr. 08, 2025	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Apr. 09, 2024	Jun. 25, 2024	Apr. 08, 2025	Radiation (03CH03-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz ~3000MHz	Oct. 18, 2023	Jun. 25, 2024	Oct. 17, 2024	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 07, 2023	Jun. 25, 2024	Jul.06, 2024	Radiation (03CH03-SZ)
Amplifier	Agilent Technologies	83017A	MY39501302	500MHz~26.5GHz	Dec. 27, 2023	Jun. 25, 2024	Dec. 26, 2024	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	616010002729	N/A	Oct. 18, 2023	Jun. 25, 2024	Oct. 17, 2024	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Jun. 25, 2024	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Jun. 25, 2024	NCR	Radiation (03CH03-SZ)

NCR: No Calibration Required

## 6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.26 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.46 dB
Peak to Average Ratio	±0.46 dB
Frequency Stability	±0.4 Hz

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.0 dB
---	--------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)


Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.6 dB
---	--------

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.8 dB
---	--------

----- THE END -----





## Appendix A. Test Results of Conducted Test

Test Engineer :	Simle Wang	Temperature :	22~23°C
		Relative Humidity :	40~42%

Software Version: 23.06.1602

# FR1 N78

### Transmitter Conducted Output Power And EIRP, (GT - LC)= -5.3dB

NR Band	SCS	BandWidth	Arfcn	Freq(MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
78	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	135@67	23.31	19.81	0.0957
78	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	23.6	20.1	0.1023
78	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@271	23.13	19.63	0.0918
78	30	100	633334	3500.01	DFT-s-OFDM QPSK	135@67	23.4	19.9	0.0977
78	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@1	23.57	20.07	0.1016
78	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@271	23.2	19.7	0.0933
78	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	135@67	22.53	19.03	0.0800
78	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	22.73	19.23	0.0838
78	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	1@271	22.57	19.07	0.0807
78	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	135@67	21.54	18.04	0.0637
78	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	1@1	21.68	18.18	0.0658
78	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	1@271	21.56	18.06	0.0640
78	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	135@67	20.52	17.02	0.0504
78	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	1@1	19.93	16.43	0.0440
78	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	1@271	19.92	16.42	0.0439
78	30	100	633334	3500.01	CP-OFDM QPSK	137@68	22.14	18.64	0.0731
78	30	100	633334	3500.01	CP-OFDM QPSK	1@1	22.32	18.82	0.0762
78	30	100	633334	3500.01	CP-OFDM QPSK	1@271	21.69	18.19	0.0659
78	30	10	630334	3455.01	DFT-s-OFDM PI/2 BPSK	1@1	23.4	19.9	0.0977
78	30	10	630334	3455.01	DFT-s-OFDM QPSK	1@1	23.48	19.98	0.0995
78	30	10	630334	3455.01	DFT-s-OFDM 16 QAM	1@1	22.84	19.34	0.0859
78	30	10	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	23.46	19.96	0.0991
78	30	10	633334	3500.01	DFT-s-OFDM QPSK	1@1	23.58	20.08	0.1019
78	30	10	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	22.39	18.89	0.0774
78	30	10	636332	3544.98	DFT-s-OFDM PI/2 BPSK	1@1	23.48	19.98	0.0995
78	30	10	636332	3544.98	DFT-s-OFDM QPSK	1@1	23.51	20.01	0.1002
78	30	10	636332	3544.98	DFT-s-OFDM 16 QAM	1@1	22.94	19.44	0.0879
78	30	15	630500	3457.5	DFT-s-OFDM PI/2 BPSK	1@1	23.32	19.82	0.0959
78	30	15	630500	3457.5	DFT-s-OFDM QPSK	1@1	23.47	19.97	0.0993
78	30	15	630500	3457.5	DFT-s-OFDM 16 QAM	1@1	22.81	19.31	0.0853
78	30	15	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	23.46	19.96	0.0991
78	30	15	633334	3500.01	DFT-s-OFDM QPSK	1@1	23.5	20	0.1000
78	30	15	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	22.39	18.89	0.0774
78	30	15	636166	3542.49	DFT-s-OFDM PI/2 BPSK	1@1	23.47	19.97	0.0993
78	30	15	636166	3542.49	DFT-s-OFDM QPSK	1@1	23.54	20.04	0.1009
78	30	15	636166	3542.49	DFT-s-OFDM 16 QAM	1@1	22.4	18.9	0.0776
78	30	20	630668	3460.02	DFT-s-OFDM PI/2 BPSK	1@1	23.4	19.9	0.0977
78	30	20	630668	3460.02	DFT-s-OFDM QPSK	1@1	23.49	19.99	0.0998
78	30	20	630668	3460.02	DFT-s-OFDM 16 QAM	1@1	22.32	18.82	0.0762
78	30	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	23.38	19.88	0.0973
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	1@1	23.56	20.06	0.1014



78	30	20	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	22.44	18.94	0.0783
78	30	20	636000	3540	DFT-s-OFDM PI/2 BPSK	1@1	23.4	19.9	0.0977
78	30	20	636000	3540	DFT-s-OFDM QPSK	1@1	23.55	20.05	0.1012
78	30	20	636000	3540	DFT-s-OFDM 16 QAM	1@1	22.42	18.92	0.0780
78	30	25	630834	3462.51	DFT-s-OFDM PI/2 BPSK	1@1	23.4	19.9	0.0977
78	30	25	630834	3462.51	DFT-s-OFDM QPSK	1@1	23.55	20.05	0.1012
78	30	25	630834	3462.51	DFT-s-OFDM 16 QAM	1@1	22.38	18.88	0.0773
78	30	25	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	23.6	20.1	0.1023
78	30	25	633334	3500.01	DFT-s-OFDM QPSK	1@1	23.44	19.94	0.0986
78	30	25	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	22.37	18.87	0.0771
78	30	25	635832	3537.48	DFT-s-OFDM PI/2 BPSK	1@1	23.46	19.96	0.0991
78	30	25	635832	3537.48	DFT-s-OFDM QPSK	1@1	23.53	20.03	0.1007
78	30	25	635832	3537.48	DFT-s-OFDM 16 QAM	1@1	22.94	19.44	0.0879
78	30	30	631000	3465	DFT-s-OFDM PI/2 BPSK	1@1	23.43	19.93	0.0984
78	30	30	631000	3465	DFT-s-OFDM QPSK	1@1	23.57	20.07	0.1016
78	30	30	631000	3465	DFT-s-OFDM 16 QAM	1@1	22.43	18.93	0.0782
78	30	30	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	23.53	20.03	0.1007
78	30	30	633334	3500.01	DFT-s-OFDM QPSK	1@1	23.57	20.07	0.1016
78	30	30	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	22.55	19.05	0.0804
78	30	30	635666	3534.99	DFT-s-OFDM PI/2 BPSK	1@1	23.41	19.91	0.0979
78	30	30	635666	3534.99	DFT-s-OFDM QPSK	1@1	23.39	19.89	0.0975
78	30	30	635666	3534.99	DFT-s-OFDM 16 QAM	1@1	22.5	19	0.0794
78	30	40	631334	3470.01	DFT-s-OFDM PI/2 BPSK	1@1	23.37	19.87	0.0971
78	30	40	631334	3470.01	DFT-s-OFDM QPSK	1@1	23.52	20.02	0.1005
78	30	40	631334	3470.01	DFT-s-OFDM 16 QAM	1@1	22.45	18.95	0.0785
78	30	40	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	23.58	20.08	0.1019
78	30	40	633334	3500.01	DFT-s-OFDM QPSK	1@1	23.57	20.07	0.1016
78	30	40	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	22.4	18.9	0.0776
78	30	40	635332	3529.98	DFT-s-OFDM PI/2 BPSK	1@1	23.38	19.88	0.0973
78	30	40	635332	3529.98	DFT-s-OFDM QPSK	1@1	23.45	19.95	0.0989
78	30	40	635332	3529.98	DFT-s-OFDM 16 QAM	1@1	22.3	18.8	0.0759
78	30	50	631668	3475.02	DFT-s-OFDM PI/2 BPSK	1@1	23.47	19.97	0.0993
78	30	50	631668	3475.02	DFT-s-OFDM QPSK	1@1	23.52	20.02	0.1005
78	30	50	631668	3475.02	DFT-s-OFDM 16 QAM	1@1	22.49	18.99	0.0793
78	30	50	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	23.54	20.04	0.1009
78	30	50	633334	3500.01	DFT-s-OFDM QPSK	1@1	23.64	20.14	0.1033
78	30	50	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	22.51	19.01	0.0796
78	30	50	635000	3525	DFT-s-OFDM PI/2 BPSK	1@1	23.49	19.99	0.0998
78	30	50	635000	3525	DFT-s-OFDM QPSK	1@1	23.6	20.1	0.1023
78	30	50	635000	3525	DFT-s-OFDM 16 QAM	1@1	22.97	19.47	0.0885
78	30	60	632000	3480	DFT-s-OFDM PI/2 BPSK	1@1	23.6	20.1	0.1023
78	30	60	632000	3480	DFT-s-OFDM QPSK	1@1	23.6	20.1	0.1023
78	30	60	632000	3480	DFT-s-OFDM 16 QAM	1@1	22.4	18.9	0.0776
78	30	60	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	23.59	20.09	0.1021
78	30	60	633334	3500.01	DFT-s-OFDM QPSK	1@1	23.61	20.11	0.1026
78	30	60	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	22.43	18.93	0.0782
78	30	60	634666	3519.99	DFT-s-OFDM PI/2 BPSK	1@1	23.67	20.17	0.1040
78	30	60	634666	3519.99	DFT-s-OFDM QPSK	1@1	23.78	20.28	0.1067
78	30	60	634666	3519.99	DFT-s-OFDM 16 QAM	1@1	22.65	19.15	0.0822
78	30	70	632334	3485.01	DFT-s-OFDM PI/2 BPSK	1@1	23.53	20.03	0.1007
78	30	70	632334	3485.01	DFT-s-OFDM QPSK	1@1	23.58	20.08	0.1019
78	30	70	632334	3485.01	DFT-s-OFDM 16 QAM	1@1	22.53	19.03	0.0800
78	30	70	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	23.54	20.04	0.1009



78	30	70	633334	3500.01	DFT-s-OFDM QPSK	1@1	23.57	20.07	0.1016
78	30	70	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	22.85	19.35	0.0861
78	30	70	634332	3514.98	DFT-s-OFDM PI/2 BPSK	1@1	23.65	20.15	0.1035
78	30	70	634332	3514.98	DFT-s-OFDM QPSK	1@1	23.72	20.22	0.1052
78	30	70	634332	3514.98	DFT-s-OFDM 16 QAM	1@1	22.73	19.23	0.0838
78	30	80	632668	3490.02	DFT-s-OFDM PI/2 BPSK	1@1	23.62	20.12	0.1028
78	30	80	632668	3490.02	DFT-s-OFDM QPSK	1@1	23.69	20.19	0.1045
78	30	80	632668	3490.02	DFT-s-OFDM 16 QAM	1@1	22.45	18.95	0.0785
78	30	80	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	23.52	20.02	0.1005
78	30	80	633334	3500.01	DFT-s-OFDM QPSK	1@1	23.66	20.16	0.1038
78	30	80	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	22.96	19.46	0.0883
78	30	80	634000	3510	DFT-s-OFDM PI/2 BPSK	1@1	23.64	20.14	0.1033
78	30	80	634000	3510	DFT-s-OFDM QPSK	1@1	23.78	20.28	0.1067
78	30	80	634000	3510	DFT-s-OFDM 16 QAM	1@1	22.68	19.18	0.0828
78	30	90	633000	3495	DFT-s-OFDM PI/2 BPSK	1@1	23.52	20.02	0.1005
78	30	90	633000	3495	DFT-s-OFDM QPSK	1@1	23.63	20.13	0.1030
78	30	90	633000	3495	DFT-s-OFDM 16 QAM	1@1	22.8	19.3	0.0851
78	30	90	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	23.63	20.13	0.1030
78	30	90	633334	3500.01	DFT-s-OFDM QPSK	1@1	23.6	20.1	0.1023
78	30	90	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	22.73	19.23	0.0838
78	30	90	633666	3504.99	DFT-s-OFDM PI/2 BPSK	1@1	23.67	20.17	0.1040
78	30	90	633666	3504.99	DFT-s-OFDM QPSK	1@1	23.71	20.21	0.1050
78	30	90	633666	3504.99	DFT-s-OFDM 16 QAM	1@1	23.07	19.57	0.0906


### Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
78	30	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	50@0	-0.0041	PASS	NV
78	30	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	50@0	-0.0015	PASS	LV
78	30	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	50@0	-0.0091	PASS	HV
78	30	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	50@0	-0.0024	PASS	-30°C
78	30	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	50@0	0.0011	PASS	-20°C
78	30	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	50@0	0.0037	PASS	-10°C
78	30	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	50@0	-0.0058	PASS	0°C
78	30	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	50@0	-0.0053	PASS	10°C
78	30	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	50@0	0.0061	PASS	20°C
78	30	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	50@0	-0.0111	PASS	30°C
78	30	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	50@0	-0.0047	PASS	40°C
78	30	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	50@0	-0.0016	PASS	50°C


### Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
78	30	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	50@0	4.74	13	PASS
78	30	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@0	5.25	13	PASS
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	5.93	13	PASS
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	1@0	5.52	13	PASS


N78(20M)\_DFT-s-OFDM\_PI\_2-BPSK\_Outer\_Full\_Mid\_CH

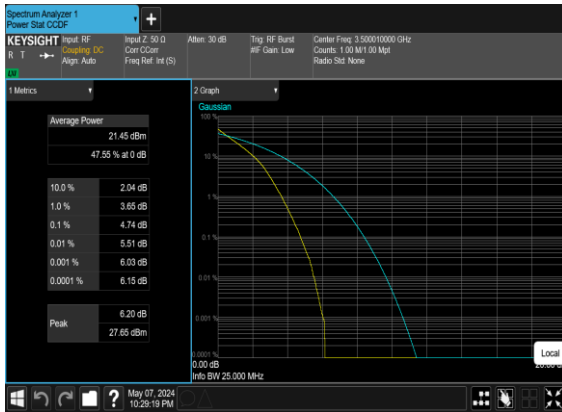

N78(20M)\_DFT-s-OFDM\_PI\_2-BPSK\_Edge\_1RB\_Left\_Mid\_CH

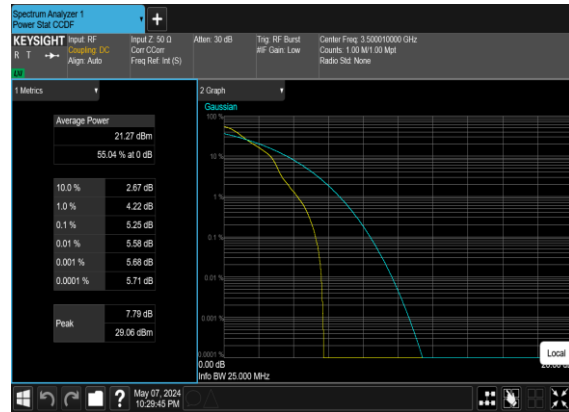

N78(20M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

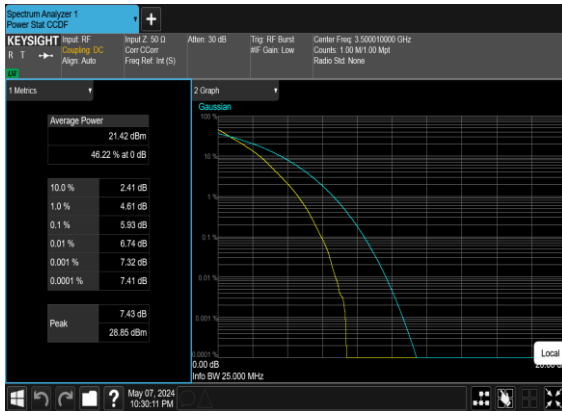

N78(20M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH





Occupied Bandwidth

Table with 9 columns: NR Band, SCS (kHz), Bandwidth (MHz), Arfcn, Freq (MHz), Modulation, RB, OBW (MHz), 26dB BW (MHz). It lists 40 rows of test data for NR Band 78, showing various SCS values from 30 to 90 kHz and corresponding bandwidth and modulation parameters.




SPORTON LAB.


78	30	90	633334	3500.01	CP-OFDM 256 QAM	245@0	87.555	90.23
78	30	100	633334	3500.01	CP-OFDM QPSK	273@0	97.075	100.3
78	30	100	633334	3500.01	CP-OFDM 16 QAM	273@0	96.925	100.5
78	30	100	633334	3500.01	CP-OFDM 64 QAM	273@0	96.974	100.5
78	30	100	633334	3500.01	CP-OFDM 256 QAM	273@0	97.124	100.4




N78(10M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

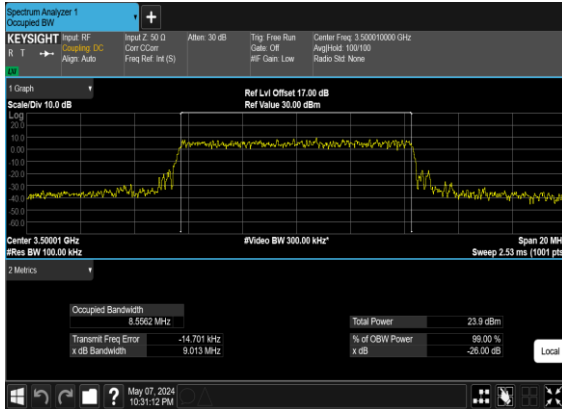


N78(10M)\_CP-OFDM\_16 QAM\_Outer\_Full\_Mid\_CH

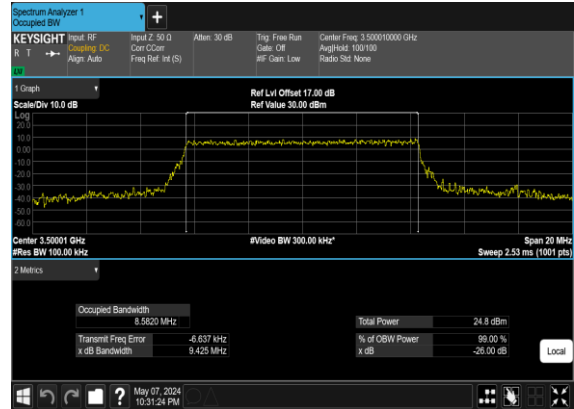


N78(10M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

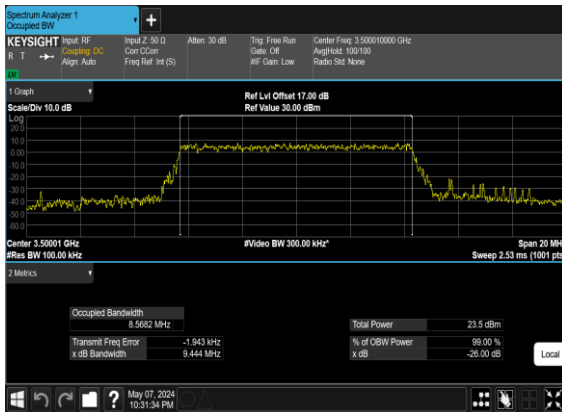


N78(10M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

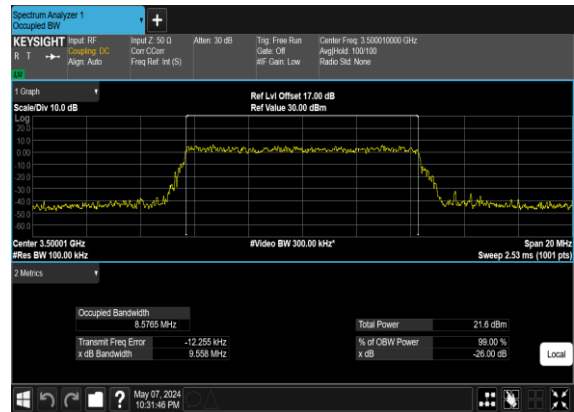

N78(15M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

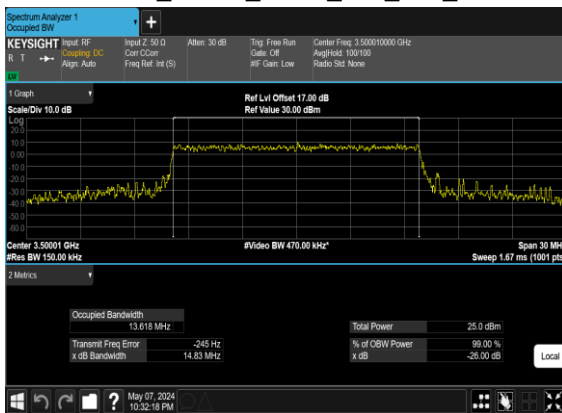


N78(15M)\_CP-OFDM\_16 QAM\_Outer\_Full\_Mid\_CH

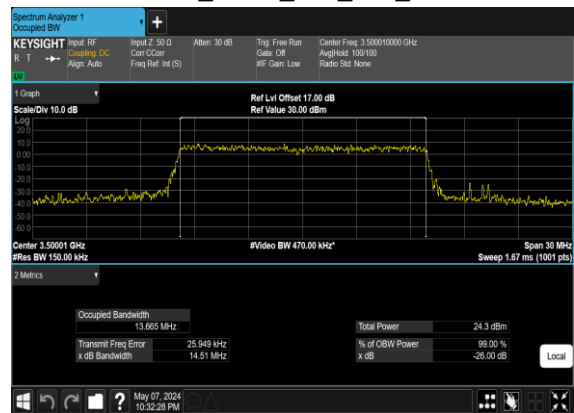







N78(15M)\_CP-OFDM\_64  
QAM\_Outer\_Full\_Mid\_CH

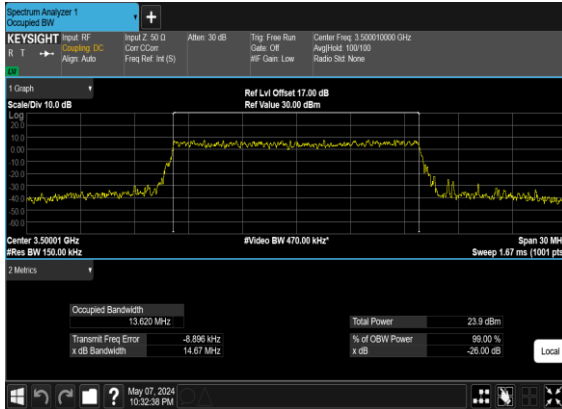


N78(15M)\_CP-OFDM\_256  
QAM\_Outer\_Full\_Mid\_CH

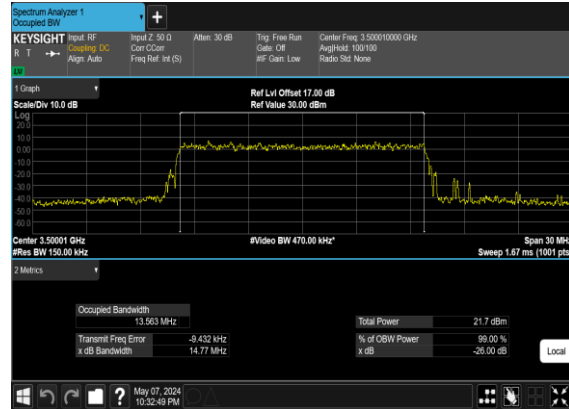


N78(20M)\_CP-  
OFDM\_QPSK\_Outer\_Full\_Mid\_CH

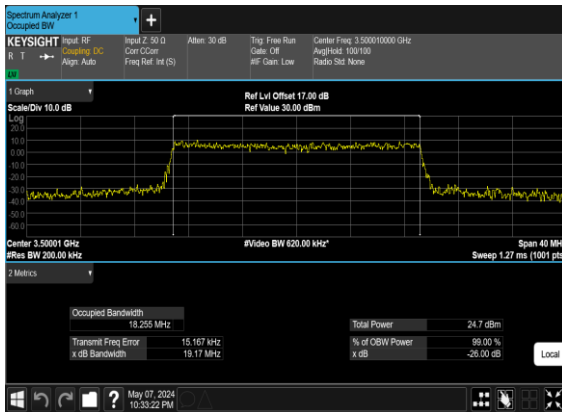


N78(20M)\_CP-OFDM\_16  
QAM\_Outer\_Full\_Mid\_CH

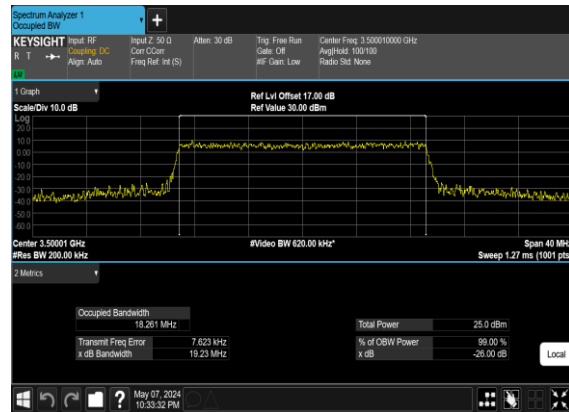

N78(20M)\_CP-OFDM\_64  
QAM\_Outer\_Full\_Mid\_CH

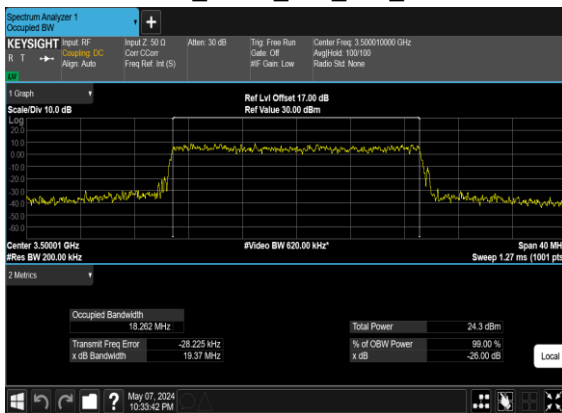


N78(20M)\_CP-OFDM\_256  
QAM\_Outer\_Full\_Mid\_CH

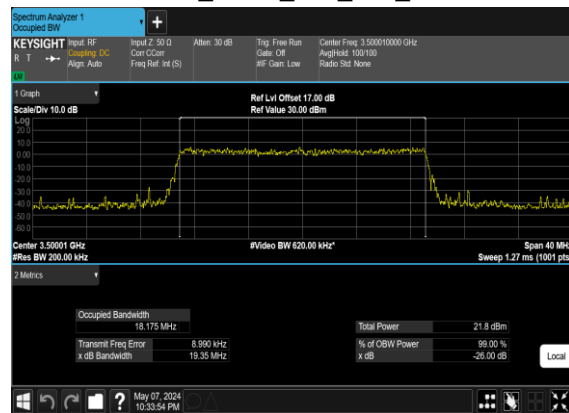





N78(25M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

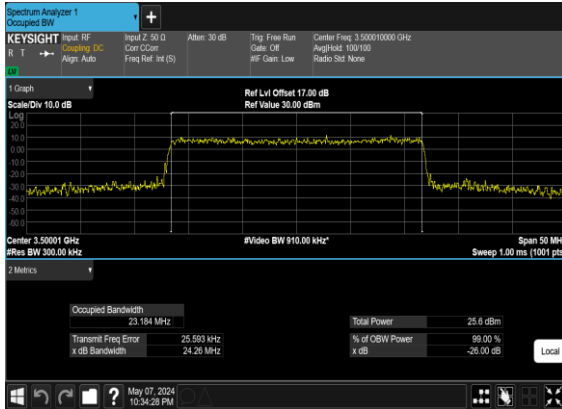


N78(25M)\_CP-OFDM\_16 QAM\_Outer\_Full\_Mid\_CH

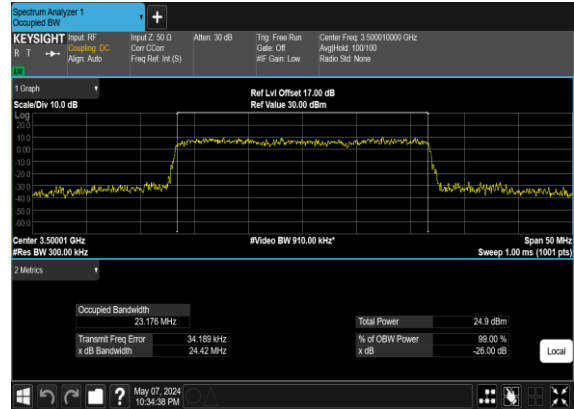


N78(25M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

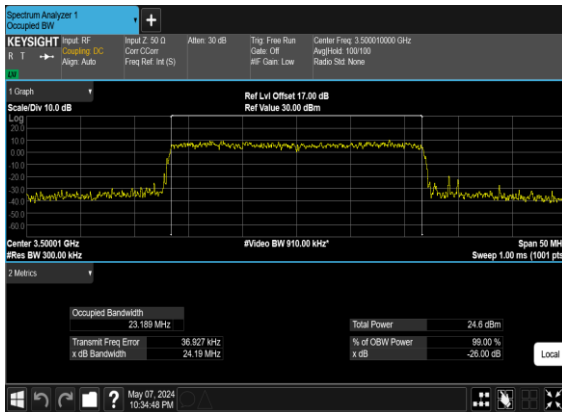


N78(25M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

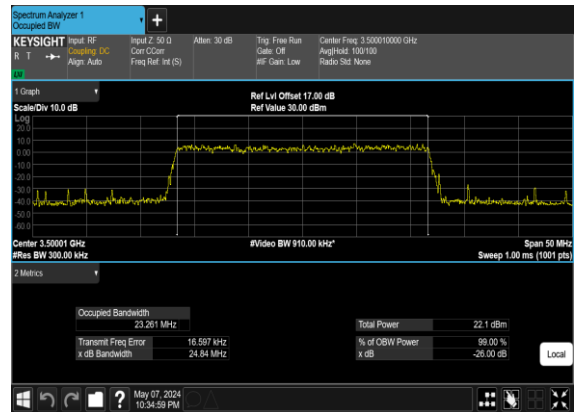

N78(30M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

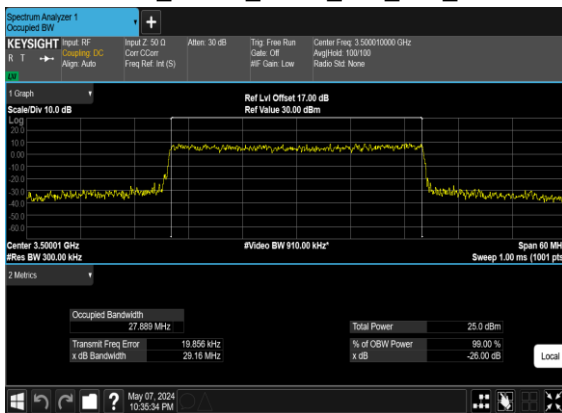


N78(30M)\_CP-OFDM\_16 QAM\_Outer\_Full\_Mid\_CH

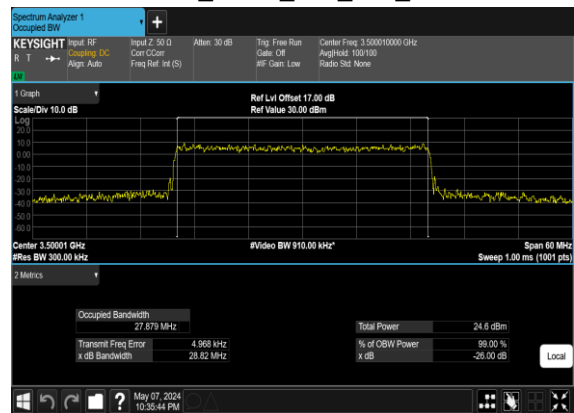





N78(30M)\_CP-OFDM\_64  
QAM\_Outer\_Full\_Mid\_CH

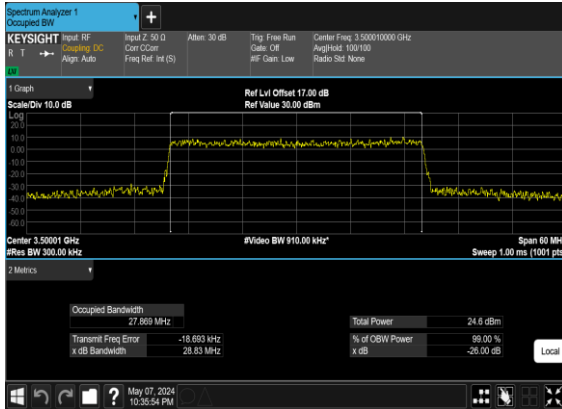


N78(30M)\_CP-OFDM\_256  
QAM\_Outer\_Full\_Mid\_CH

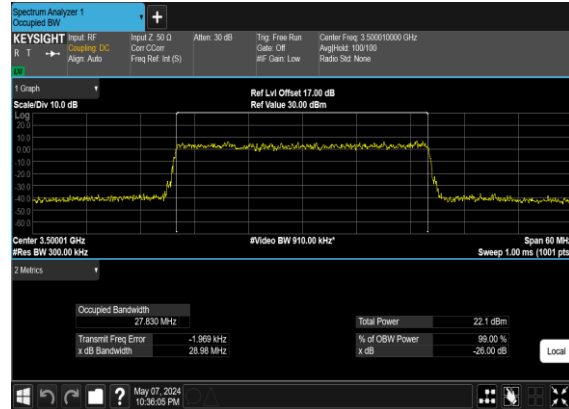


N78(40M)\_CP-  
OFDM\_QPSK\_Outer\_Full\_Mid\_CH

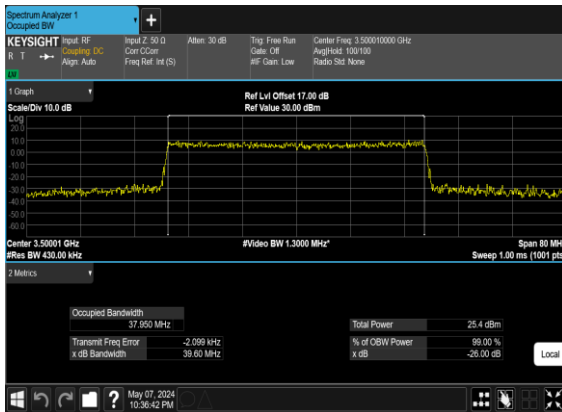


N78(40M)\_CP-OFDM\_16  
QAM\_Outer\_Full\_Mid\_CH

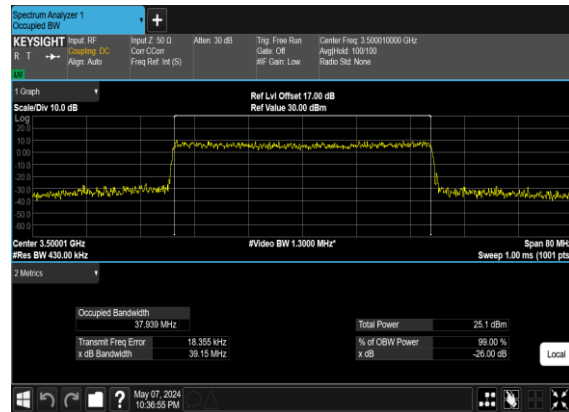


N78(40M)\_CP-OFDM\_64  
QAM\_Outer\_Full\_Mid\_CH

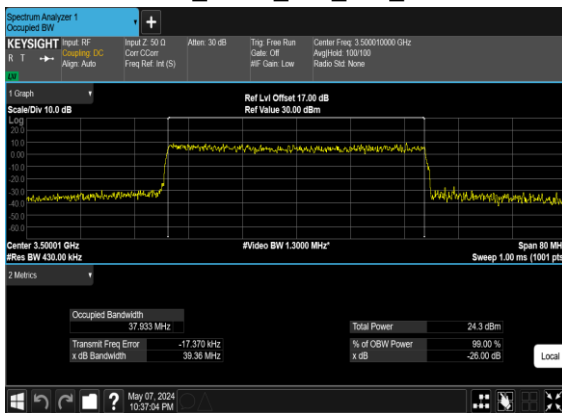


N78(40M)\_CP-OFDM\_256  
QAM\_Outer\_Full\_Mid\_CH

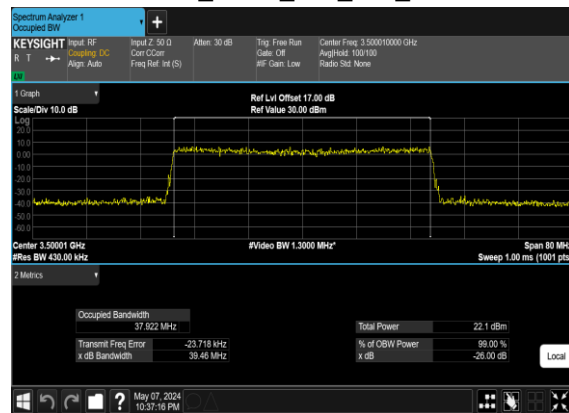


**N78(50M)\_CP-  
OFDM\_QPSK\_Outer\_Full\_Mid\_CH**

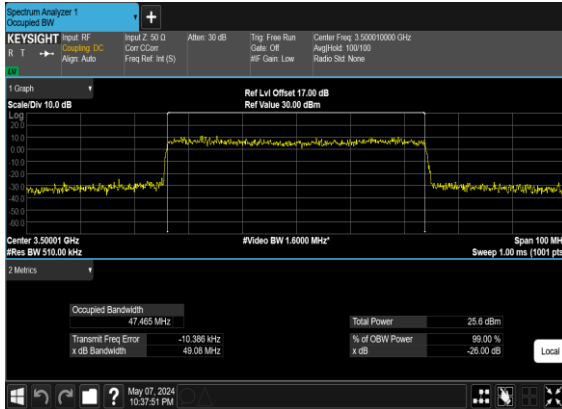


**N78(50M)\_CP-OFDM\_16  
QAM\_Outer\_Full\_Mid\_CH**

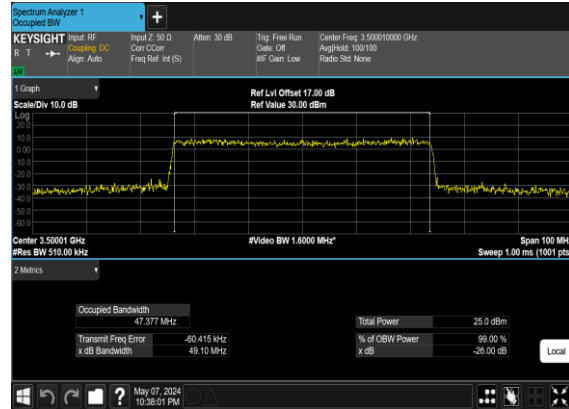


**N78(50M)\_CP-OFDM\_64  
QAM\_Outer\_Full\_Mid\_CH**

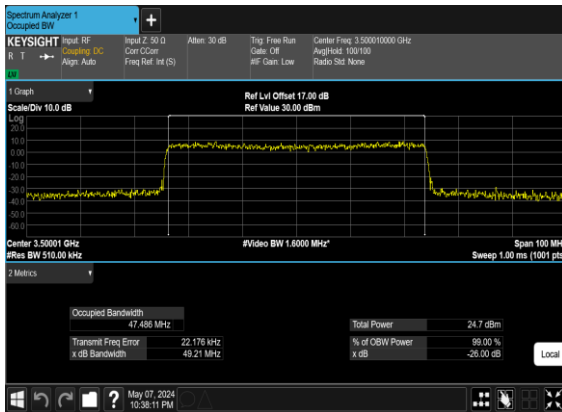


**N78(50M)\_CP-OFDM\_256  
QAM\_Outer\_Full\_Mid\_CH**

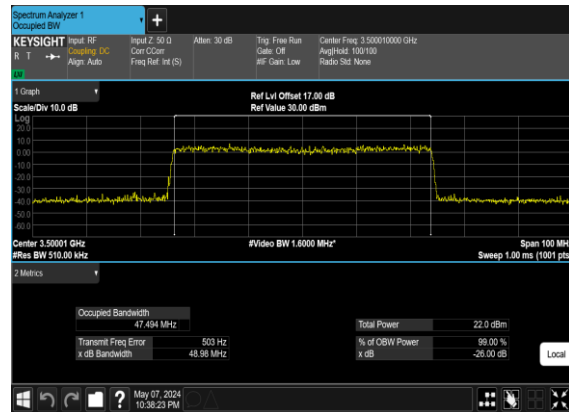

**N78(60M)\_CP-  
OFDM\_QPSK\_Outer\_Full\_Mid\_CH**

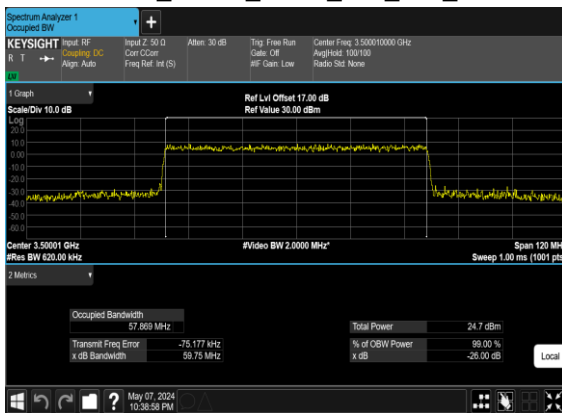


**N78(60M)\_CP-OFDM\_16  
QAM\_Outer\_Full\_Mid\_CH**

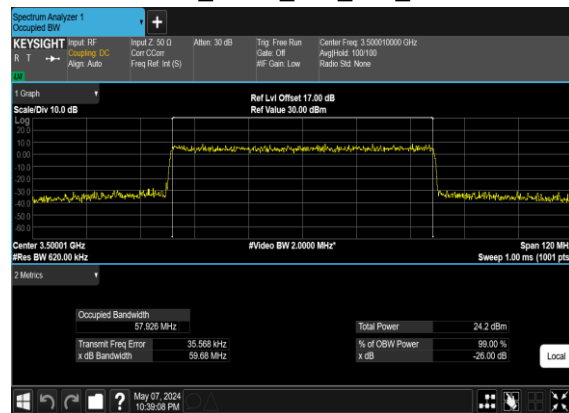





N78(60M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

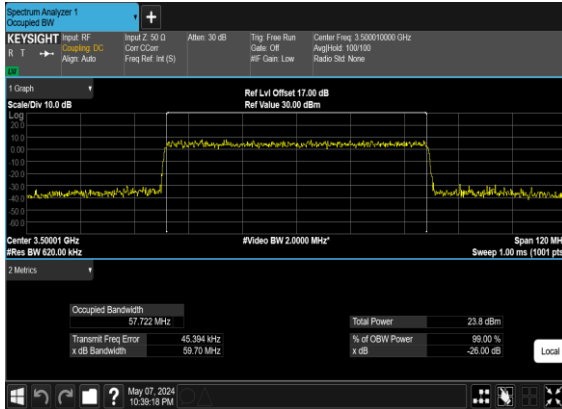


N78(60M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

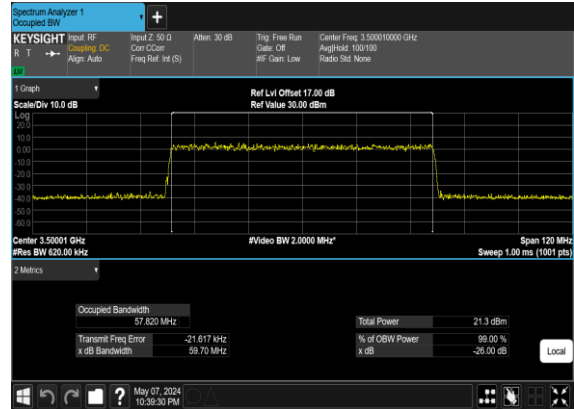


N78(70M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

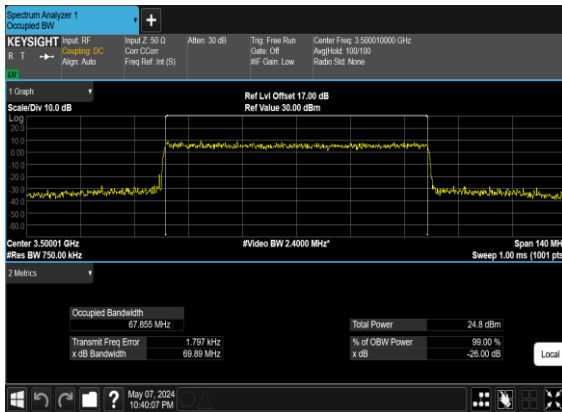


N78(70M)\_CP-OFDM\_16 QAM\_Outer\_Full\_Mid\_CH

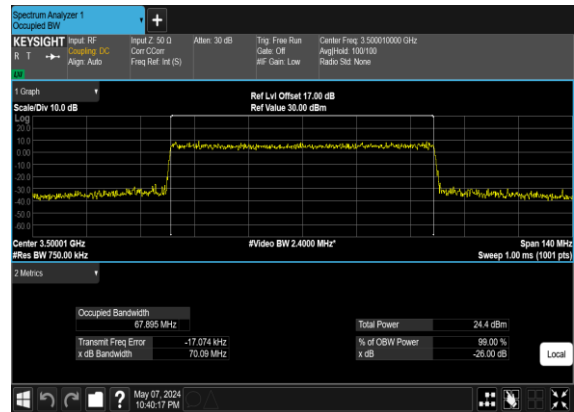

N78(70M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

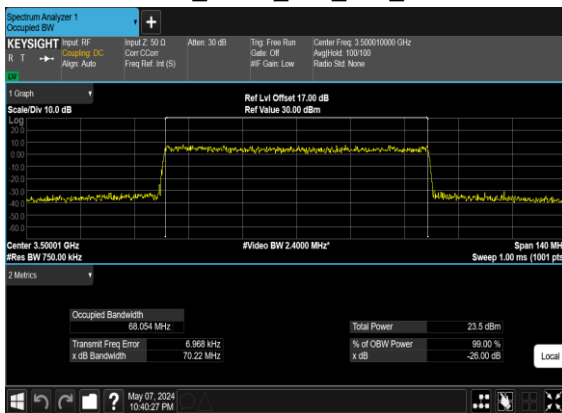


N78(70M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

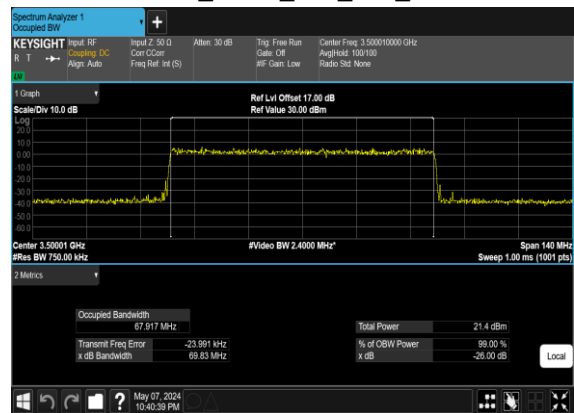




N78(80M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

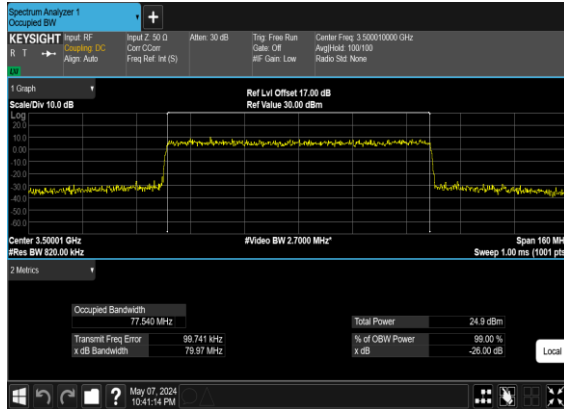


N78(80M)\_CP-OFDM\_16 QAM\_Outer\_Full\_Mid\_CH

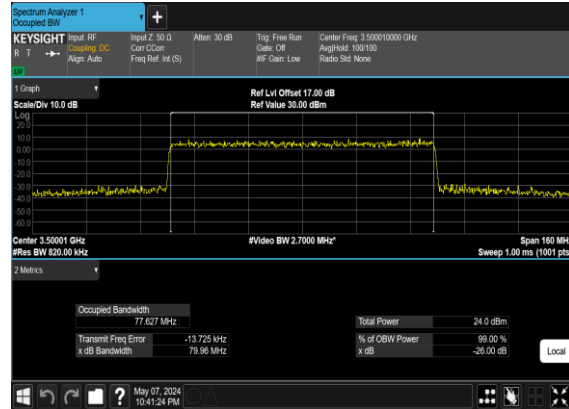


N78(80M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH




N78(80M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

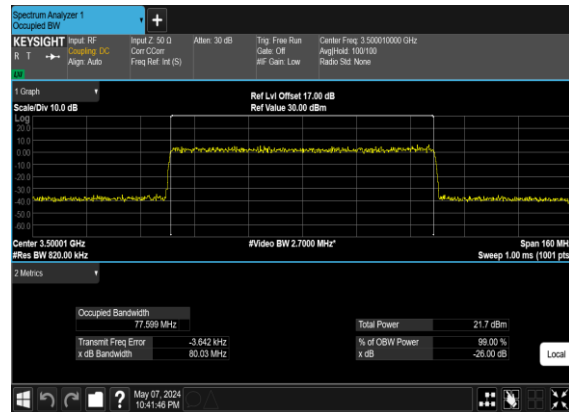


N78(90M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

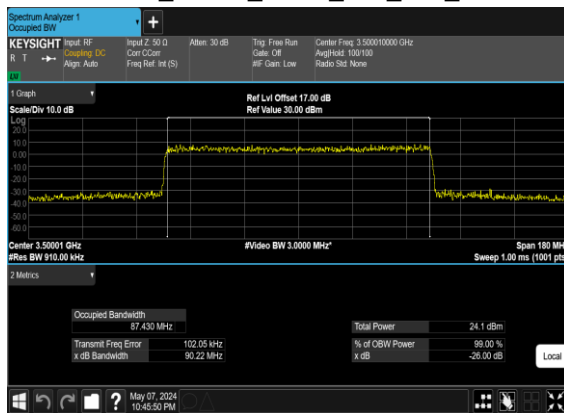


N78(90M)\_CP-OFDM\_16 QAM\_Outer\_Full\_Mid\_CH

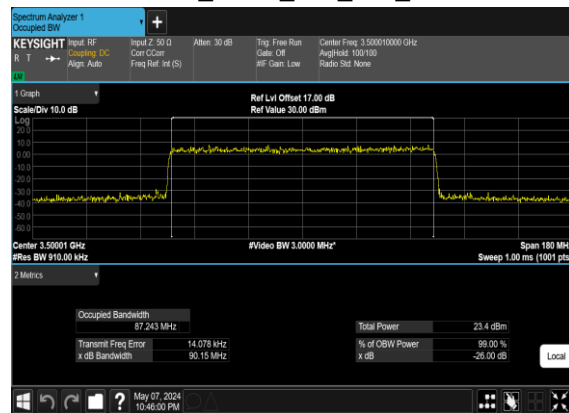


**N78(90M)\_CP-OFDM\_64  
QAM\_Outer\_Full\_Mid\_CH**

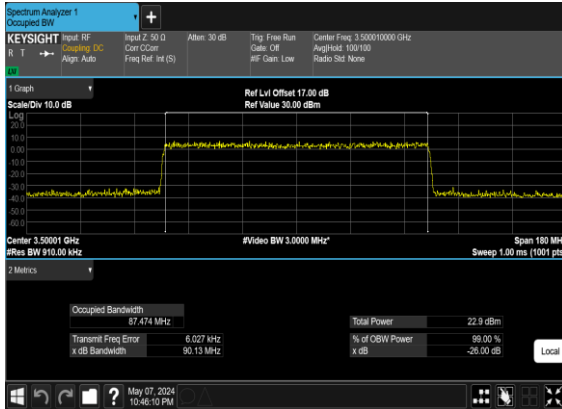


**N78(90M)\_CP-OFDM\_256  
QAM\_Outer\_Full\_Mid\_CH**

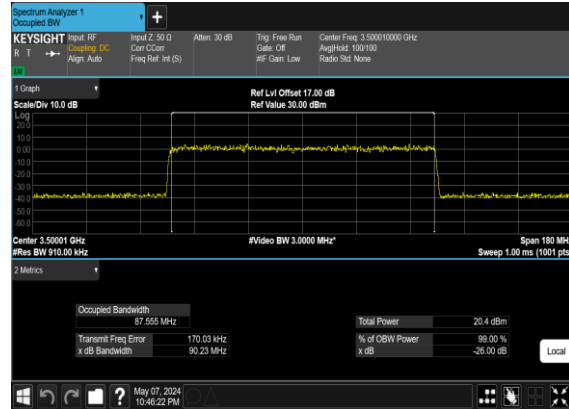


**N78(100M)\_CP-  
OFDM\_QPSK\_Outer\_Full\_Mid\_CH**

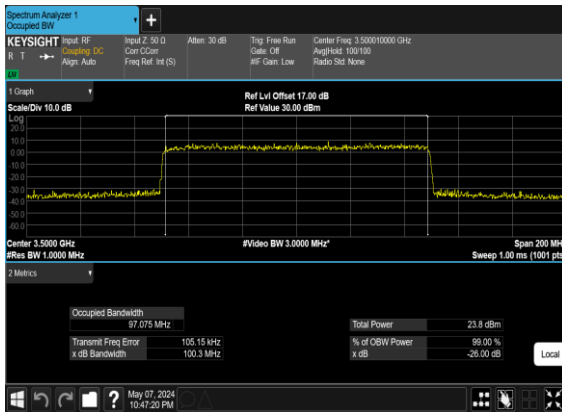


**N78(100M)\_CP-OFDM\_16  
QAM\_Outer\_Full\_Mid\_CH**

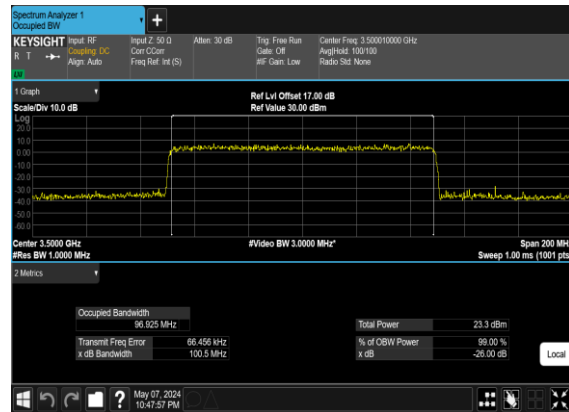

**N78(100M)\_CP-OFDM\_64  
QAM\_Outer\_Full\_Mid\_CH**

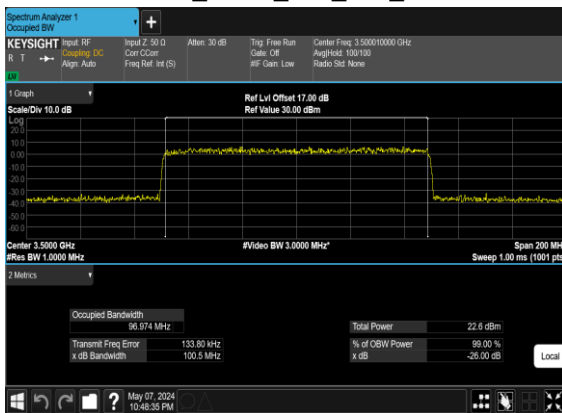

**N78(100M)\_CP-OFDM\_256  
QAM\_Outer\_Full\_Mid\_CH**

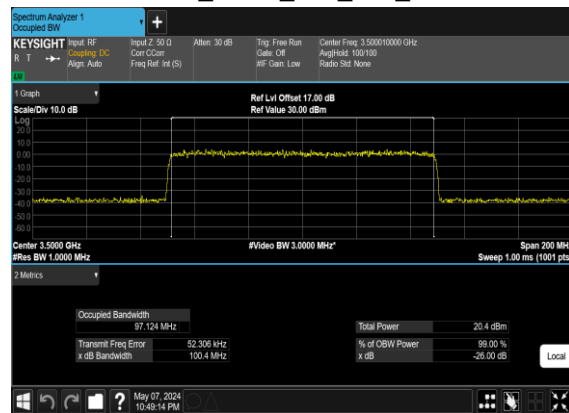




### Conducted Spurious Emissions

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
78	30	10	630334	3455.01	DFT-s-OFDM BPSK	1@0	see graph	---
78	30	10	630334	3455.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	10	630334	3455.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	10	630334	3455.01	DFT-s-OFDM QPSK	1@0	see graph	---
78	30	10	630334	3455.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	10	630334	3455.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	10	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	---
78	30	10	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	10	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	10	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	---
78	30	10	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	10	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	10	636332	3544.98	DFT-s-OFDM BPSK	1@0	see graph	---
78	30	10	636332	3544.98	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	10	636332	3544.98	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	10	636332	3544.98	DFT-s-OFDM QPSK	1@0	see graph	---
78	30	10	636332	3544.98	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	10	636332	3544.98	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	50	631668	3475.02	DFT-s-OFDM BPSK	1@0	see graph	---
78	30	50	631668	3475.02	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	50	631668	3475.02	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	50	631668	3475.02	DFT-s-OFDM QPSK	1@0	see graph	---
78	30	50	631668	3475.02	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	50	631668	3475.02	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	50	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	---
78	30	50	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	50	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	50	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	---
78	30	50	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	50	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	50	635000	3525.0	DFT-s-OFDM BPSK	1@0	see graph	---
78	30	50	635000	3525.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	50	635000	3525.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	50	635000	3525.0	DFT-s-OFDM QPSK	1@0	see graph	---
78	30	50	635000	3525.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	50	635000	3525.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	---
78	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	---
78	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS






N78(10M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

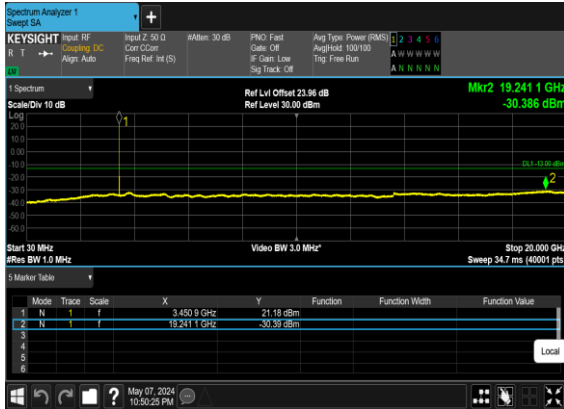


N78(10M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH




N78(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

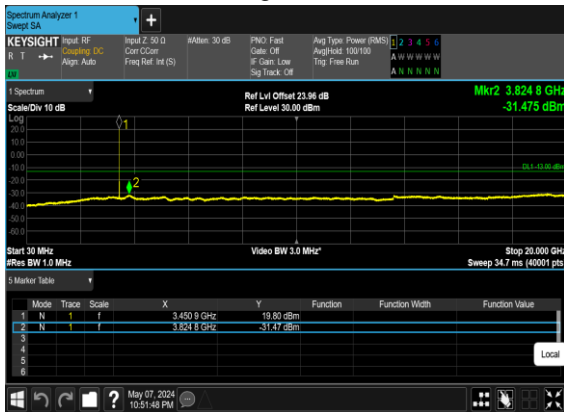


N78(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

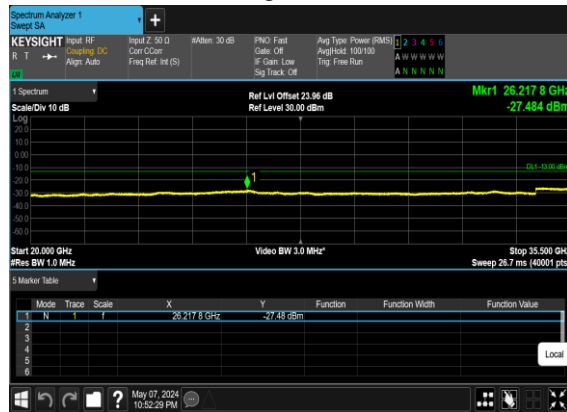

N78(10M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

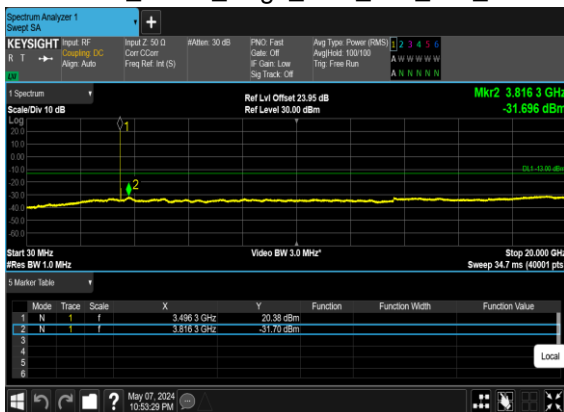


N78(10M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

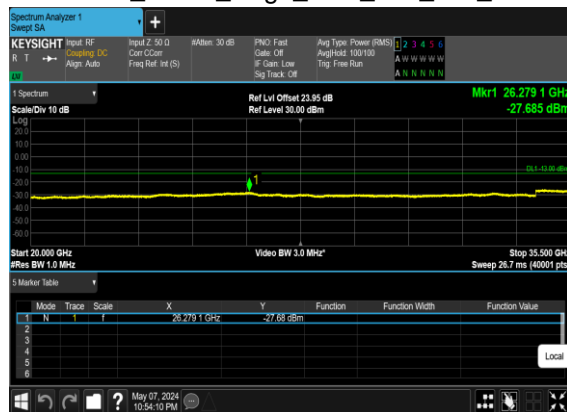





N78(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

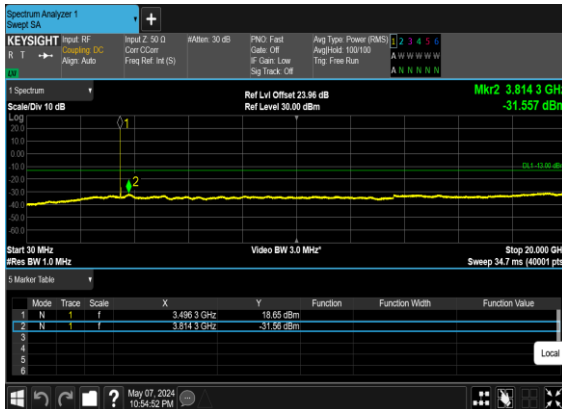


N78(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

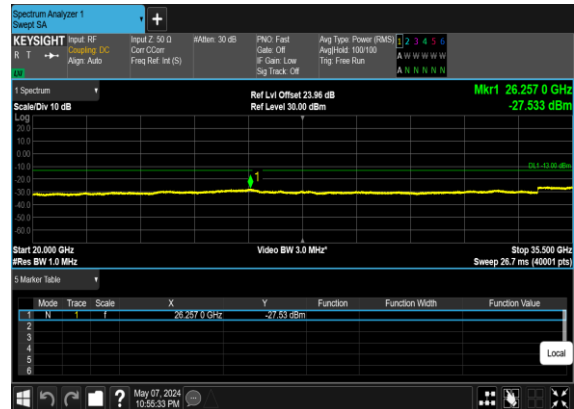

N78(10M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_High\_CH

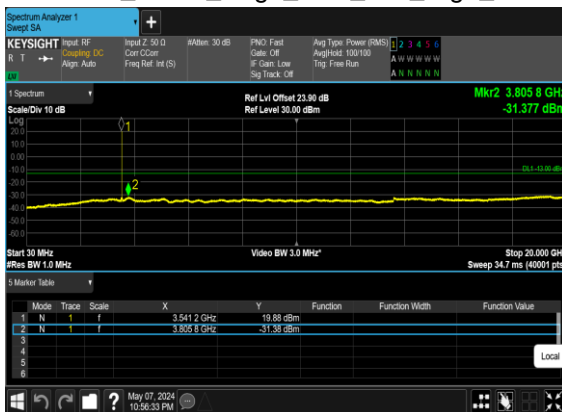


N78(10M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_High\_CH

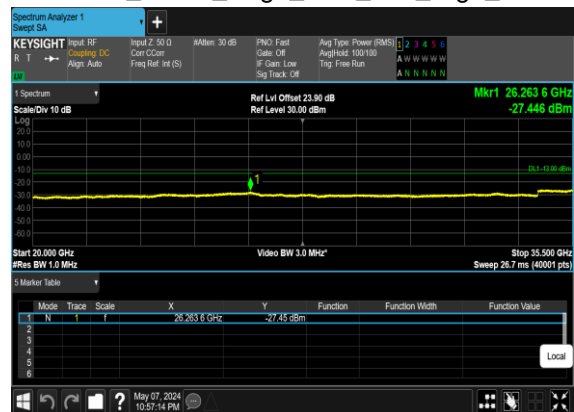

N78(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH




N78(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH

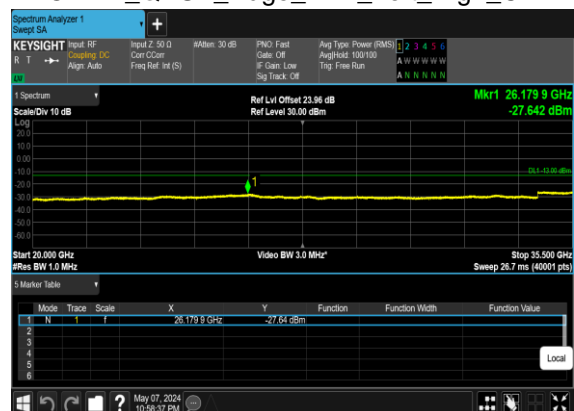





N78(50M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

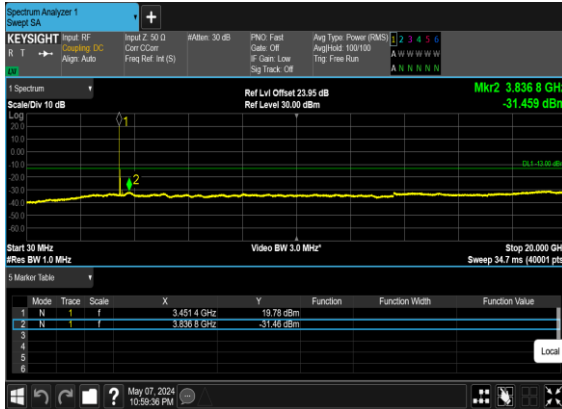


N78(50M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

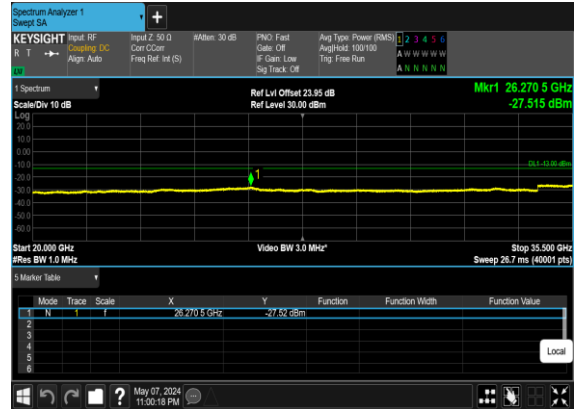


N78(50M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

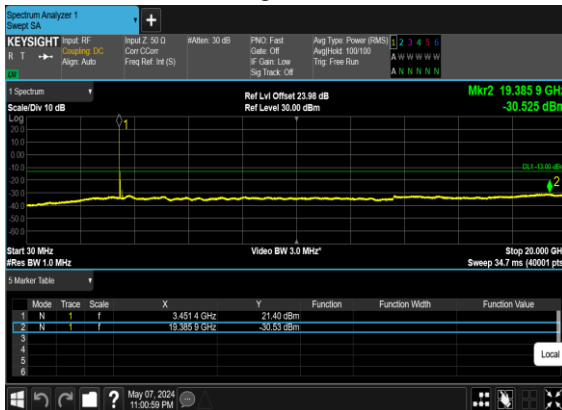


N78(50M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

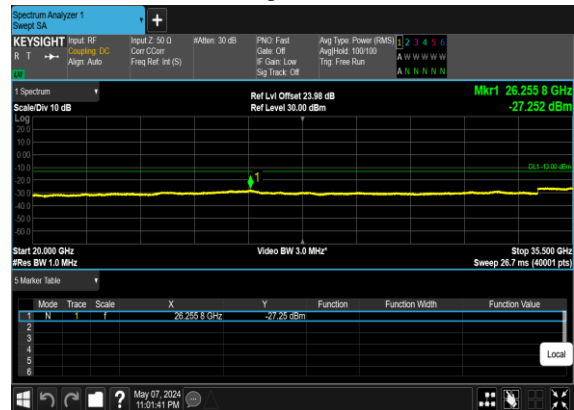

N78(50M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

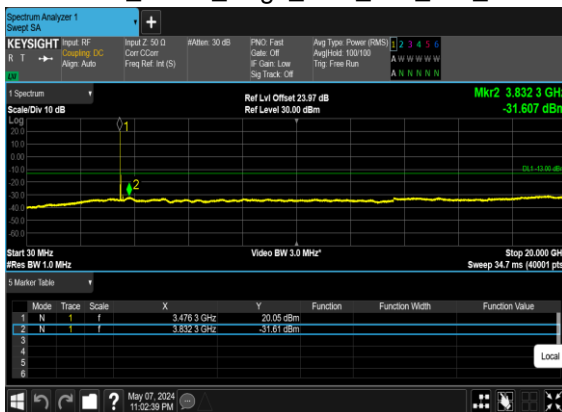


N78(50M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

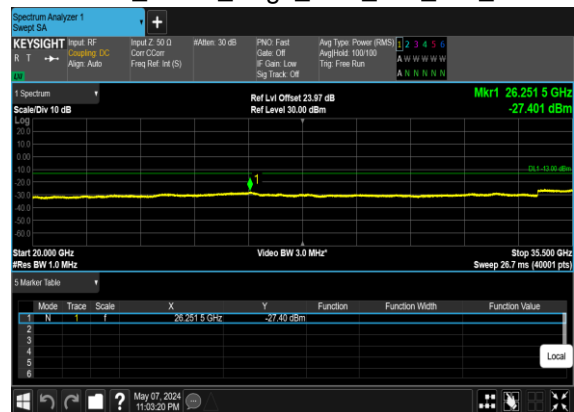





N78(50M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

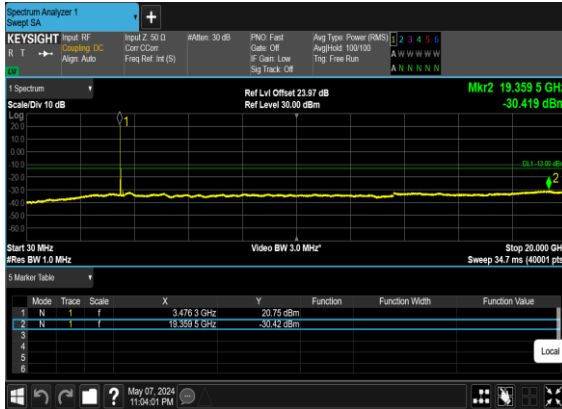


N78(50M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

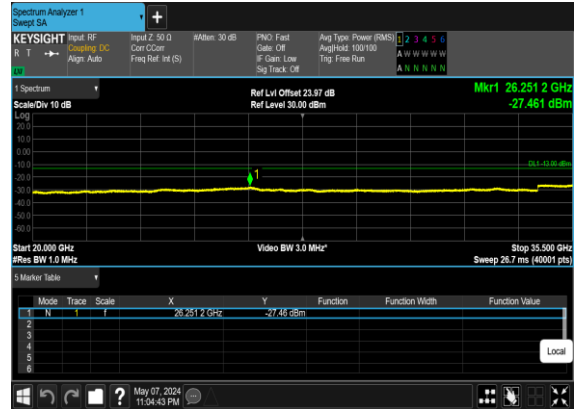


N78(50M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_High\_CH

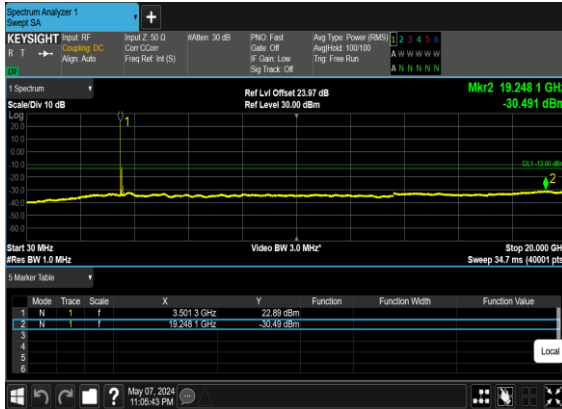


N78(50M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_High\_CH

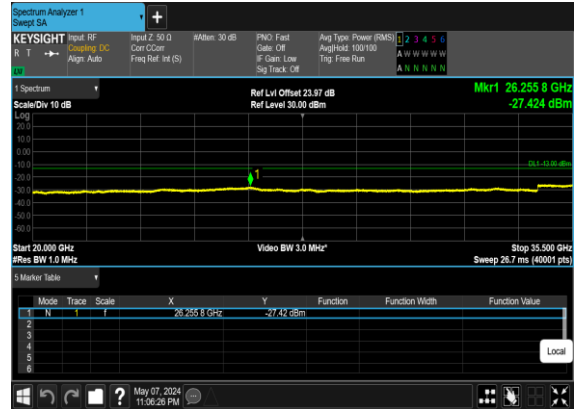

N78(50M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH

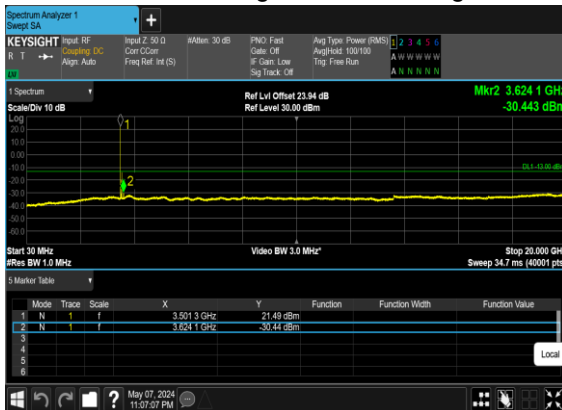


N78(50M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH

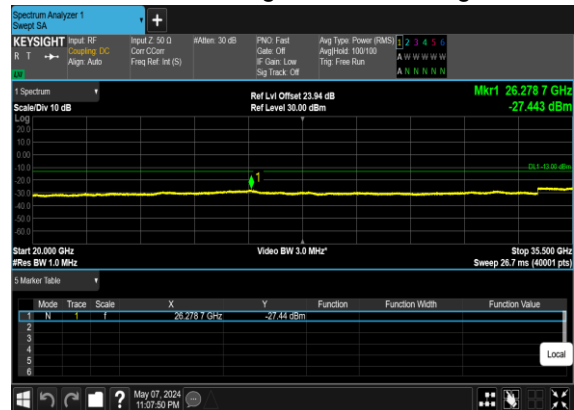





**N78(100M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH**

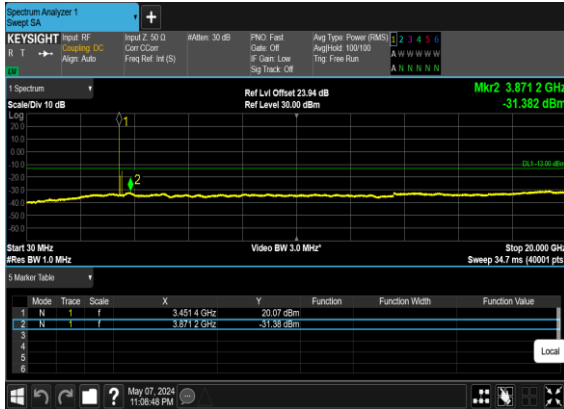


**N78(100M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH**

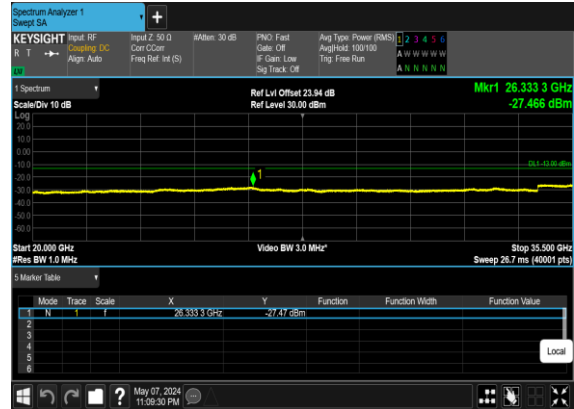

**N78(100M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH**

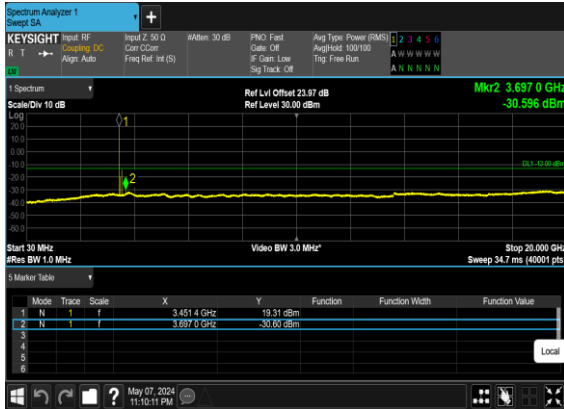

**N78(100M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH**

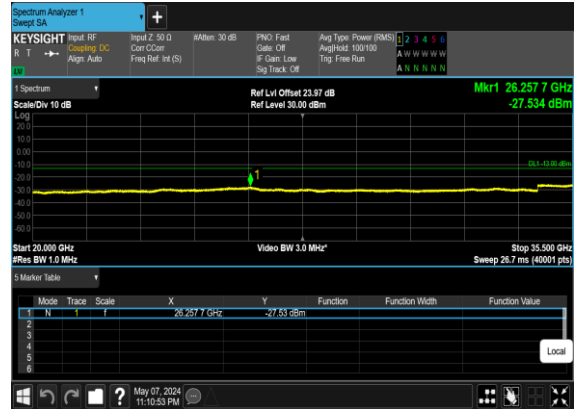



### Conducted Band Edge


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
78	30	10	630334	3455.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	10	630334	3455.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	10	630334	3455.01	DFT-s-OFDM BPSK	24@0	see graph	PASS
78	30	10	630334	3455.01	DFT-s-OFDM QPSK	24@0	see graph	PASS
78	30	10	636332	3544.98	DFT-s-OFDM BPSK	1@23	see graph	PASS
78	30	10	636332	3544.98	DFT-s-OFDM QPSK	1@23	see graph	PASS
78	30	10	636332	3544.98	DFT-s-OFDM BPSK	24@0	see graph	PASS
78	30	10	636332	3544.98	DFT-s-OFDM QPSK	24@0	see graph	PASS
78	30	50	631668	3475.02	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	50	631668	3475.02	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	50	631668	3475.02	DFT-s-OFDM BPSK	128@0	see graph	PASS
78	30	50	631668	3475.02	DFT-s-OFDM QPSK	128@0	see graph	PASS
78	30	50	635000	3525.0	DFT-s-OFDM BPSK	1@132	see graph	PASS
78	30	50	635000	3525.0	DFT-s-OFDM QPSK	1@132	see graph	PASS
78	30	50	635000	3525.0	DFT-s-OFDM BPSK	128@0	see graph	PASS
78	30	50	635000	3525.0	DFT-s-OFDM QPSK	128@0	see graph	PASS
78	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@272	see graph	PASS
78	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@272	see graph	PASS
78	30	100	633334	3500.01	DFT-s-OFDM BPSK	270@0	see graph	PASS
78	30	100	633334	3500.01	DFT-s-OFDM QPSK	270@0	see graph	PASS




N78(10M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH




N78(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

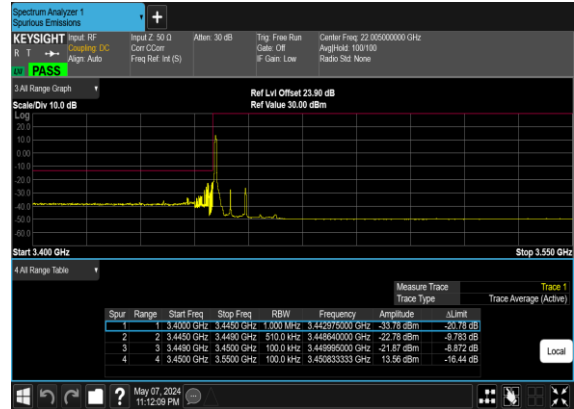


N78(10M)\_DFT-s-OFDM\_BPSK\_Outer\_Full\_Low\_CH

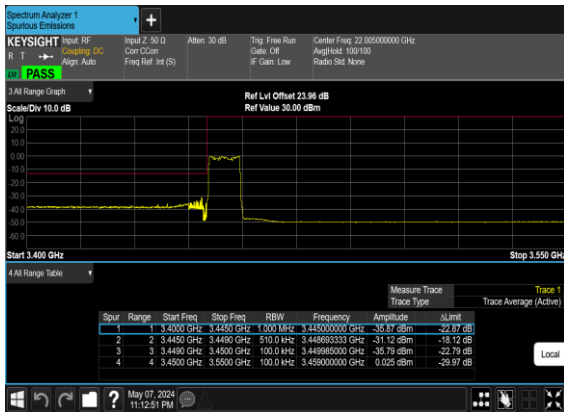

N78(10M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_Low\_CH

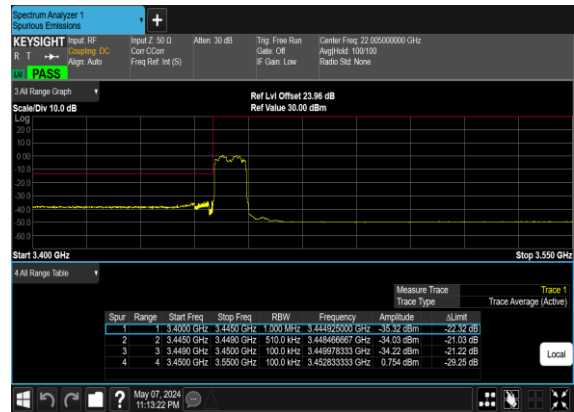

N78(10M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Right\_High\_CH

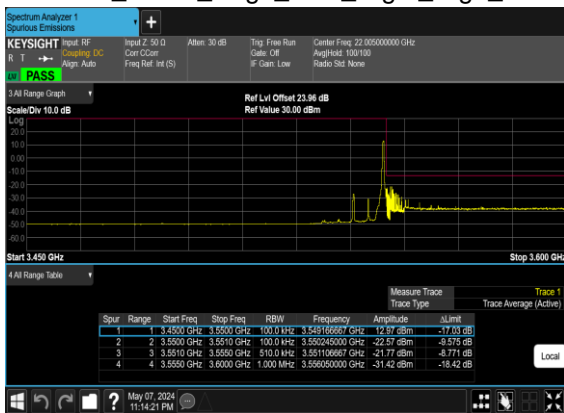

N78(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Right\_High\_CH

