

FCC SAR Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Phone
BRAND NAME : Motorola
MODEL NAME : XT2433-5, XT2433-4
FCC ID : IHDT56AS5
STANDARD : FCC 47 CFR Part 2 (2.1093)

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.



Approved by: Si Zhang



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



Table of Contents

1. Statement of Compliance 4
2. Administration Data 5
3. Data Reuse Approach 6
3.1 Introduction Section..... 6
3.2 Model Difference Information 6
3.3 Reference detail Section 6
4. Guidance Applied 7
5. Equipment Under Test (EUT) Information 8
5.1 General Information..... 8
5.2 General LTE SAR Test and Reporting Considerations 10
5.3 General 5G NR SAR Test and Reporting Considerations 12
6. Proximity Sensor Triggering Test 14
7. RF Exposure Limits..... 17
7.1 Uncontrolled Environment 17
7.2 Controlled Environment..... 17
8. Specific Absorption Rate (SAR) 18
8.1 Introduction 18
8.2 SAR Definition 18
9. System Description and Setup..... 19
9.1 E-Field Probe 20
9.2 Data Acquisition Electronics (DAE) 20
9.3 Phantom 21
9.4 Device Holder 22
10. Measurement Procedures..... 23
10.1 Spatial Peak SAR Evaluation 23
10.2 Power Reference Measurement..... 24
10.3 Area Scan..... 24
10.4 Zoom Scan 25
10.5 Volume Scan Procedures 25
10.6 Power Drift Monitoring 25
11. Test Equipment List 26
12. System Verification 27
12.1 Tissue Simulating Liquids 27
12.2 Tissue Verification 28
12.3 System Performance Check Results 29
13. RF Exposure Positions 30
13.1 Ear and handset reference point 30
13.2 Definition of the cheek position 31
13.3 Definition of the tilt position 32
13.4 Body Worn Accessory 33
13.5 Product Specific 10g SAR Exposure 34
13.6 Wireless Router 34
14. Conducted RF Output Power (Unit: dBm) 35
15. Antenna Location 44
16. SAR Test Results 45
16.1 Head SAR 48
16.2 Hotspot SAR 51
16.3 Body-Worn SAR 54
16.4 Product specific 10g SAR 57
16.5 Repeated SAR Measurement 60
16.6 TDD LTE Linearity Data Analysis 61
17. Simultaneous Transmission Analysis 63
17.1 Head Exposure Conditions 64
17.2 Hotspot Exposure Conditions 66
17.3 Body-Worn Accessory Exposure Conditions 68
17.4 Product specific 10g SAR Exposure Conditions 70
17.5 SPLSR Evaluation and Analysis 72
18. Uncertainty Assessment 83
19. References 84
Appendix A. Plots of System Performance Check
Appendix B. Plots of High SAR Measurement
Appendix C. DASy Calibration Certificate
Appendix D. Test Setup Photos



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Motorola Mobility LLC, Mobile Phone, XT2433-5, XT2433-4**, are as follows.

Highest 1g SAR Summary						
Equipment Class	Frequency Band		Head (Separation 0mm)	Hotspot (Separation 5mm)	Body-worn (Separation 5mm)	Highest Simultaneous Transmission 1g SAR (W/kg)
			1g SAR (W/kg)			
Licensed	GSM	GSM850	0.33	1.44	1.44	1.59
		GSM1900	<0.10	1.43	1.43	
	WCDMA	WCDMA II	0.13	1.33	1.14	
		WCDMA V	0.25	1.26	1.26	
	LTE	LTE Band 5	0.25	1.41	1.41	
		LTE Band 7	1.12	1.26	1.26	
		LTE Band 26	0.18	0.94	0.94	
		LTE Band 2	0.13	1.37	1.32	
		LTE Band 41/38	0.89	1.24	1.24	
		LTE Band 42	0.92	0.78	0.86	
	5G NR	FR1 n7	0.71	1.23	1.12	
		FR1 n26/n5	0.17	1.09	1.09	
		FR1 n41/n38	1.00	0.72	0.95	
		FR1 n77/n78	0.85	1.22	1.22	
DTS	WLAN	2.4GHz WLAN	1.30	0.55	1.38	1.59
NII		5GHz WLAN	1.20	0.62	1.14	1.59
DSS	Bluetooth	2.4GHz Bluetooth	0.26	0.12	0.12	1.59

Highest 10g SAR Summary				
Equipment Class	Frequency Band		Product Specific 10g SAR (W/kg) (Separation 0mm)	Highest Simultaneous Transmission 10g SAR (W/kg)
Licensed	GSM	GSM850	2.40	3.98
		GSM1900	3.56	
	WCDMA	WCDMA II	3.52	
		WCDMA V	1.16	
	LTE	LTE Band 5	1.30	
		LTE Band 7	2.52	
		LTE Band 2	3.55	
		LTE Band 41/38	3.13	
		LTE Band 42	2.74	
	5G NR	FR1 n7	3.22	
		FR1 n41/38	2.68	
FR1 n77/n78		2.82		
DTS	WLAN	2.4GHz WLAN	1.13	3.98
NII		5GHz WLAN	3.00	3.97

Date of Testing: 2024/7/15 ~ 2024/8/13

Remark:

- This device supports LTE B38 and B41. Since the supported frequency span for LTE B38 falls completely within the supports frequency span for B41, both LTE bands have the same target power, and both LTE bands share the same transmission path; therefore, SAR was only assessed for B41.
- This device supports 5GNR n38/n5 and n41/n26. Since the supported frequency span for 5GNR n38/n5 falls completely within the supports frequency span for n41/n26, both 5GNR bands have the same target power, and both 5GNR bands share the same transmission path; therefore, SAR was only assessed for n41/n26.

Declaration of Conformity:



The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

2. Administration Data

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Testing Laboratory			
Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	SAR03-KS	CN1257	314309

Applicant	
Company Name	Motorola Mobility LLC
Address	222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

Manufacturer	
Company Name	Motorola Mobility LLC
Address	222 W,Merchandise Mart Plaza, Chicago IL 60654 USA



3. Data Reuse Approach

3.1 Introduction Section

This application re-uses data collected on a similar device, FCC ID: IHDT56AS4 (reference model) and FCC ID: IHDT56AS5 (variant model). Due to the same design are identical between parent model and variant model, SAR data reuse is requested and spot check data in this report is used to justify the SAR data reuse.

Per KDB 484596 D01 v02r03, the deviation of variant model 1g SAR and 10g SAR spot check result was no larger than 3 dB, the WWAN/WLAN/BT max SAR summary was always choose the higher SAR between parent model and variant model.

The applicant should take full responsibility that the test data as referenced in this report represent compliance for this FCC ID: IHDT56AS5

3.2 Model Difference Information

The main difference between FCC ID: IHDT56AS4 and FCC ID: IHDT56AS5 is as below:

- Remove WCDMA Band IV, LTE Band 4/12/13/17/25/66 and 5G NR n2/n66.
- Add LTE B20/32/38C/41C/42C and 5G NR n8/n20/n77.

ther differences and all the details of similarity and difference can be found in the confidential documents (XT2433-5, XT2433-4_Operational Description of Product Equality Declaration).

3.3 Reference detail Section

Rule Part	Equipment Class	Wireless Technology	Frequency Band (MHz)	FCC ID (Reference)	Type Grant/ Permissive Change	Reference Title	FCC ID Filling (Variant)	Test on the variant
Part 2.1093	PCE	GSM	GSM850/1900	IHDT56AS4	Original Grant	FA422904	IHDT56AS5	Spot check
		WCDMA	B2/5	IHDT56AS4	Original Grant	FA422904	IHDT56AS5	Spot check
		LTE	B2/5/7(Ant1)/26/42	IHDT56AS4	Original Grant	FA422904	IHDT56AS5	Spot check
		LTE	B7(Ant4)/B38/B41				IHDT56AS5	Full Test
		5GNR FR1	n5/7/26	IHDT56AS4	Original Grant	FA422904	IHDT56AS5	Spot check
		5GNR FR1	n38/41/77/78				IHDT56AS5	Full Test
	DTS	BLE/ WiFi	2400~2483.5	IHDT56AS4	Original Grant	FA422904	IHDT56AS5	Spot check
	NII	Wi-Fi	5150 ~ 5250 5250 ~ 5350 5470 ~ 5725 5725 ~ 5850	IHDT56AS4	Original Grant	FA422904	IHDT56AS5	Spot check
	DSS	Bluetooth	2400~2483.5	IHDT56AS4	Original Grant	FA422904	IHDT56AS5	Spot check
	DXX	NFC	13.56				IHDT56AS5	Full Test



4. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01
- FCC KDB 484596 D01 Referencing Test Data v02r03

5. Equipment Under Test (EUT) Information

5.1 General Information

Product Feature & Specification	
Equipment Name	Mobile Phone
Brand Name	Motorola
Model Name	XT2433-5, XT2433-4
FCC ID	IHDT56AS5
IMEI Code	Sample 4: IMEI1: 351333780064861 IMEI2: 351333780094868 Sample 5: IMEI1: 351333780063038 IMEI2: 351333780093035 Sample 6: IMEI1: 351333780070470 IMEI2: 351333780100475
Wireless Technology and Frequency Range	GSM850: 824 MHz ~ 849 MHz GSM1900: 1850 MHz ~ 1910 MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 42: 3450 MHz ~ 3550 MHz 5G NR n5: 824 MHz ~ 849 MHz 5G NR n7: 2500 MHz ~ 2570 MHz 5G NR n26: 814 MHz ~ 849 MHz 5G NR n38: 2570 MHz ~ 2620 MHz 5G NR n41: 2496 MHz ~ 2690 MHz 5G NR n77: 3700 MHz ~ 3980 MHz 5G NR n78: 3700 MHz ~ 3800 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC: 13.56 MHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA/HSUPA DC-HSDPA HSPA+(16QAM uplink is supported) LTE: QPSK, 16QAM, 64QAM, 256QAM 5G NR : CP-OFDM / DFT-s-OFDM, PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE NFC: ASK
HW Version	DVT2
SW Version	UOA34.101
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype



Remark:

1. This device supports VoIP in GPRS, EGPRS, WCDMA, LTE and 5G NR (e.g. for 3rd-party VoIP), LTE supports VoLTE operation.
2. This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications.
3. This device 5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WiFi Direct (GC/GO), and 5.3GHz / 5.5GHz supports WiFi Direct (GC only).
4. This device does not support DTM operation and supports GPRS/EGPRS mode up to multi-slot class 12.
5. This device supports dual SIM dual standby. The WWAN radio transmission will be enabled by either one SIM at a time (single active).
6. The device implements the power management and proximity sensor/receiver detection/hotspot mode for SAR compliance at different exposure conditions (head, body-worn, hotspot, extremity). Details about the power management decision and sensor detection are provided in the operational description. And the device will invoke corresponding work scenarios power level base on frequency bands/antennas, which can refer to power table at appendix E.
7. For WLAN when transmit simultaneous with WWAN/BT, power reduction will be activated to head exposure condition. For WLAN when transmit simultaneous with WWAN and Proximity sensors trigger, power reduction will be activated to body-worn and extremity exposure conditions.
8. This device supports HPUE for LTE Band 41 with class 2 level, HPUE power has been measured separately. For HPUE power is higher than power class 3 but with lower duty cycle, the maximum average power for class 2 and class 3 is almost the same, so we chose power class 3 full SAR testing and power class 2 verify the worst case of power class 3 SAR.
9. For 5G NR test, using FTM to perform SAR with default 100% transmission.
10. 5G NR n77/n78 supports HPUE, HPUE power and SAR testing performed separately.
11. 5G NR n77/n78 HPUE with higher power, 5G NR n77/n78 HPUE SAR can represent power class 3 level SAR.
12. For 5G NR EN-DC mode, standalone SAR performed for 5G NR NSA band with the maximum power, EN-DC SAR summed EN-DC mode 5G NR standalone SAR and LTE standalone SAR, the result of EN-DC SAR is more conservatively.
13. There are three samples, the different between them refer to the XT2433-5, XT2433-4_Operational Description of Product Equality Declaration which is exhibit separately. According to the differences, sample 4 was chosen to perform full SAR testing and sample 5/6 verified the worst case of sample 4.
14. This device has NFC function and the NFC SAR report will be separately submitted.
15. The two model names are only for different market purpose, and all the others are the same.
16. This device supports 5G NR FR1 bands as following table, including NSA mode and SA mode. NSA and SA mode performed SAR separately.

<5G NR>

Mode	Band	Duplex	SCS(KHz)	Bandwidths(BW)
NSA	n5	FDD	15	5, 10, 15, 20
	n41	TDD	30	10, 15, 20, 30, 40, 50, 60, 70, 80, 90, 100
	n77	TDD	30	10, 15, 20, 25, 30, 40, 50, 60, 80, 90, 100
	n78	TDD	30	10, 15, 20, 25, 30, 40, 50, 60, 70, 80, 90, 100
SA	n5	FDD	15	5, 10, 15, 20
	n7	FDD	15	5, 10, 15, 20, 25, 30, 40, 50
	n26	FDD	15	5, 10, 15, 20
	n38	TDD	30	10, 15, 20, 25, 30, 40
	n41	TDD	30	10, 15, 20, 30, 40, 50, 60, 70, 80, 90, 100
	n77	TDD	30	10, 15, 20, 25, 30, 40, 50, 60, 80, 90, 100
	n78	TDD	30	10, 15, 20, 25, 30, 40, 50, 60, 70, 80, 90, 100

5.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																															
FCC ID	IHDT56AS5																																																														
Equipment Name	Mobile Phone																																																														
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 42: 3450 MHz ~ 3550 MHz																																																														
Channel Bandwidth	LTE Band 2: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 26: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 42: 5MHz, 10MHz, 15MHz, 20MHz																																																														
uplink modulations used	QPSK / 16QAM / 64QAM / 256QAM																																																														
LTE Voice / Data requirements	Voice and Data																																																														
LTE Release Version	R15																																																														
CA Support	Supported, Uplink and Downlink																																																														
LTE MPR permanently built-in by design	<p>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>64 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> <tr> <td>256 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table>	Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	256 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																								
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																									
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																								
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																								
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																								
256 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																								
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																								
256 QAM	≥ 1						≤ 5																																																								
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																														
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																														
Power reduction applied to satisfy SAR compliance	Yes, when operating in Proximity sensors/receiver/hotspot detect mechanism, head/body-worn /hotspot/extremity will trigger reduced power for some bands applied to satisfy SAR compliance, the detail please referred to section 14.																																																														
LTE Carrier Aggregation Combinations	Inter-Band and Intra-Band possible combinations and the detail power verification please referred to section 14.																																																														
LTE Carrier Aggregation Additional Information	1. This device supports LTE Carrier Aggregation (CA) in the uplink for intra-band with two component carriers in the uplink. SAR Measurements and conducted powers were evaluated per FCC Guidance. 2. This device supports maximum of 3 carriers in the downlink and 2 carriers in the uplink.																																																														



Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829	20450	829	20450	829
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5
H	20643	848.3	20635	847.5	20625	846.5	20600	844	20600	844	20600	844
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510	20850	2510	20850	2510
M	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560	21350	2560	21350	2560
LTE Band 26												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26740	819	26765	821.5
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26990	844	26965	841.5
LTE Band 38												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580	37850	2580	37850	2580
M	38000	2595	38000	2595	38000	2595	38000	2595	38000	2595	38000	2595
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610	38150	2610	38150	2610
LTE Band 41												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506	39750	2506	39750	2506
LM	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5	40185	2549.5	40185	2549.5
M	40620	2593	40620	2593	40620	2593	40620	2593	40620	2593	40620	2593
HM	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5	41055	2636.5	41055	2636.5
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680	41490	2680	41490	2680
LTE Band 42												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	42115	3452.5	42140	3455	42165	3457.5	42190	3460	42190	3460	42190	3460
M	42590	3500	42590	3500	42590	3500	42590	3500	42590	3500	42590	3500
H	43065	3547.5	43040	3545	43015	3542.5	42990	3540	42990	3540	42990	3540

<For LTE Overlap Bands Description>

1) LTE Bands BW

Band	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz
LTE Band 38			Yes	Yes	Yes	Yes
LTE Band 41			Yes	Yes	Yes	Yes

2) LTE Bands tune up:

Band	Antenna	Head DSI 2 Tune-up Limit	Body-worn DSI 3 Tune-up Limit	Hotspot DSI 7 Tune-up Limit	Extremity DSI 6 Tune-up Limit	Sensor Off DSI 4 Tune-up Limit	Default Tune-up Limit
LTE Band 41(38) other pa	Ant 1	24.00	21.00	21.00	22.50	24.00	24.00
LTE Band 41 HPUE other pa	Ant 1	27.00	24.00	24.00	25.50	27.00	27.00
LTE Band 41(38)	Ant 4	16.50	16.00	14.00	20.50	24.00	24.00
LTE Band 41 HPUE	Ant 4	19.50	19.00	17.00	23.50	27.00	27.00



5.3 General 5G NR SAR Test and Reporting Considerations

5G NR Information	
Operating Frequency Range of each 5G NR transmission band	5G NR n5: 824 MHz ~ 849 MHz 5G NR n7: 2500 MHz ~ 2570 MHz 5G NR n26: 814 MHz ~ 849 MHz 5G NR n38: 2570 MHz ~ 2620 MHz 5G NR n41: 2496 MHz ~ 2690 MHz 5G NR n77: 3700 MHz ~ 3980 MHz 5G NR n78: 3700 MHz ~ 3800 MHz
Channel Bandwidth	The detail please refers to section 5.1 5GNR FR1 bands table.
SCS	FDD: SCS15KHz, TDD: SCS30KHz
uplink modulations used	DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM
A-MPR (Additional MPR) disabled for SAR Testing?	Yes
LTE Anchor Bands for n5	LTE B7
LTE Anchor Bands for n41	LTE B5
LTE Anchor Bands for n77	LTE B7/41
LTE Anchor Bands for n78	LTE B5/7/38/41

Transmission (H, M, L) channel numbers and frequencies in each 5G NR band								
NR Band 5								
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	165300	826.5	165800	829	166300	831.5	166800	834
M	167300	836.5	167300	836.5	167300	836.5	167300	836.5
H	169300	846.5	168800	844	168300	841.5	167800	839

NR Band 7																
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 25MHz		Bandwidth 30MHz		Bandwidth 40MHz		Bandwidth 50MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	500500	2502.5	501000	2505	501500	2507.5	502000	2510	502500	2512.5	503000	2515	504000	2520	505000	2525
M	507000	2535	507000	2535	507000	2535	507000	2535	507000	2535	507000	2535	507000	2535	507000	2535
H	513500	2567.5	513000	2565	512500	2562.5	512000	2560	511500	2557.5	511000	2555	510000	2550	509000	2545

NR Band 26								
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	163300	816.5	163800	819	164300	821.5	164800	824
M	166300	831.5	166300	831.5	166300	831.5	166300	831.5
H	169300	846.5	168800	844	168300	841.5	167800	839

NR Band 38												
	Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 25MHz		Bandwidth 30MHz		Bandwidth 40MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	515004	2575.02	515502	2577.51	516000	2580	516504	2582.52	517002	2585.01	518004	2590.02
M	519000	2595	519000	2595	519000	2595	519000	2595	519000	2595	519000	2595
H	522996	2614.98	522498	2612.49	522000	2610	521496	2607.48	520998	2604.99	519996	2599.98

NR Band 41																						
	Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 30MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 70MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth 100MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	500202	2501.01	500700	2503.5	501204	2506.02	502200	2511	503202	2516.01	504204	2521.02	505200	2526	500202	2501.01	507204	2536.02	508200	2541	509202	2546.01
M	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99
H	537000	2685	536496	2682.48	535998	2679.99	534996	2674.98	534000	2670	532998	2664.99	531996	2659.98	531000	2655	529998	2649.99	528996	2644.98	528000	2640



NR Band 77 SCS30KHz																						
Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 25MHz		Bandwidth 30MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth 100MHz		
Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	647000	3705	647168	3707.52	647334	3710.01	647500	3712.5	647668	3715.02	648000	3720	648334	3725.01	648668	3730.02	649334	3740.01	649668	3745.02	650000	3750
M	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840
H	665000	3975	664834	3972.51	664666	3970.02	664500	3967.5	664332	3965.01	664000	3960	663668	3955.02	663332	3950.01	662666	3940.02	662332	3935.01	662000	3930

NR Band 78 SCS30KHz																							
Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 25MHz		Bandwidth 30MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 70MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth 100MHz	
Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	647000	3705	647168	3707.52	647334	3710.01	647500	3712.5	647668	3715.02	648000	3720	648334	3725.01	648668	3730.02	649000	3735	649334	3740.01	649668	3745.02	
M	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	
H	653000	3795	652834	3792.51	652668	3790.02	652500	3787.5	652334	3785.01	652000	3780	651668	3775.02	651334	3770.01	651000	3765	650668	3760.02	650334	3755.01	

<For NR Overlap Bands Description>

1) NR Bands BW

Band	Duplex	SCS(KHz)	Bandwidths(BW)
n5	FDD	15	5, 10, 15, 20
n26	FDD	15	5, 10, 15, 20
n38	TDD	30	10, 15, 20, 25, 30, 40
n41	TDD	30	10, 15, 20, 30, 40, 50, 60, 70, 80, 90, 100
n77	TDD	30	10, 15, 20, 25, 30, 40, 50, 60, 80, 90, 100
n78	TDD	30	10, 15, 20, 25, 30, 40, 50, 60, 70, 80, 90, 100


2) NR Bands Tune up:

Band	Antenna	Head DSI 2 Tune-up Limit	Body-worn DSI 3 Tune-up Limit	Hotspot DSI 7 Tune-up Limit	Extremity DSI 6 Tune-up Limit	Sensor Off DSI 4 Tune-up Limit	Default Tune-up Limit
5G NR n26(5)	Ant 0	24.00	24.00	24.00	24.00	24.00	24.00
5G NR n41(38) PC3	Ant 4	16.00	13.50	12.50	19.00	24.00	24.00
5G NR n77(78) PC3	Ant 5	20.50	19.50	18.00	21.00	24.00	24.00
5G NR n77(78) PC2	Ant 5	20.50	19.50	18.00	21.00	27.00	27.00
5G NR n77(78) PC2/3	Ant 1	24.00	21.00	20.00	22.00	24.00	24.00
5G NR n77(78) PC2/3	Ant 2	24.00	21.00	19.50	21.00	21.00	24.00
5G NR n77(78) PC2/3	Ant 8	22.00	18.00	16.50	22.00	22.00	22.00

6. Proximity Sensor Triggering Test

<Proximity Sensor Triggering Distance>:

1. Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed and the tissue-equivalent medium for highest frequency (5850MHz) and lowest (835MHz) frequency was used for proximity sensor triggering testing.
2. Capacitive proximity sensors placed coincident with antenna elements at the top and bottom ends of the phone are utilized to determine when the device comes in proximity of the user's body at the front or back of the device.
3. The output power will reduce to body worn power level when top and bottom sensor pad be detected.
4. The sensors used to detect the proximity of the user's body at the front or back surface of the device use a detection threshold distance. The data shown in the sections below shows the distance(s). When front or back body worn condition is detected reduced power will be active.
5. The device employs proximity sensors also can detect the presence of the user's a finger or hand when handheld state at the front/back/top/bottom/left/right sides of the device. When front/back/top/bottom/left/right sides of handheld condition is detected reduced power will be active.
6. For verification of compliance of power reduction scheme, additional SAR testing with EUT transmitting at full RF power at a conservative trigger distance -1mm was performed:

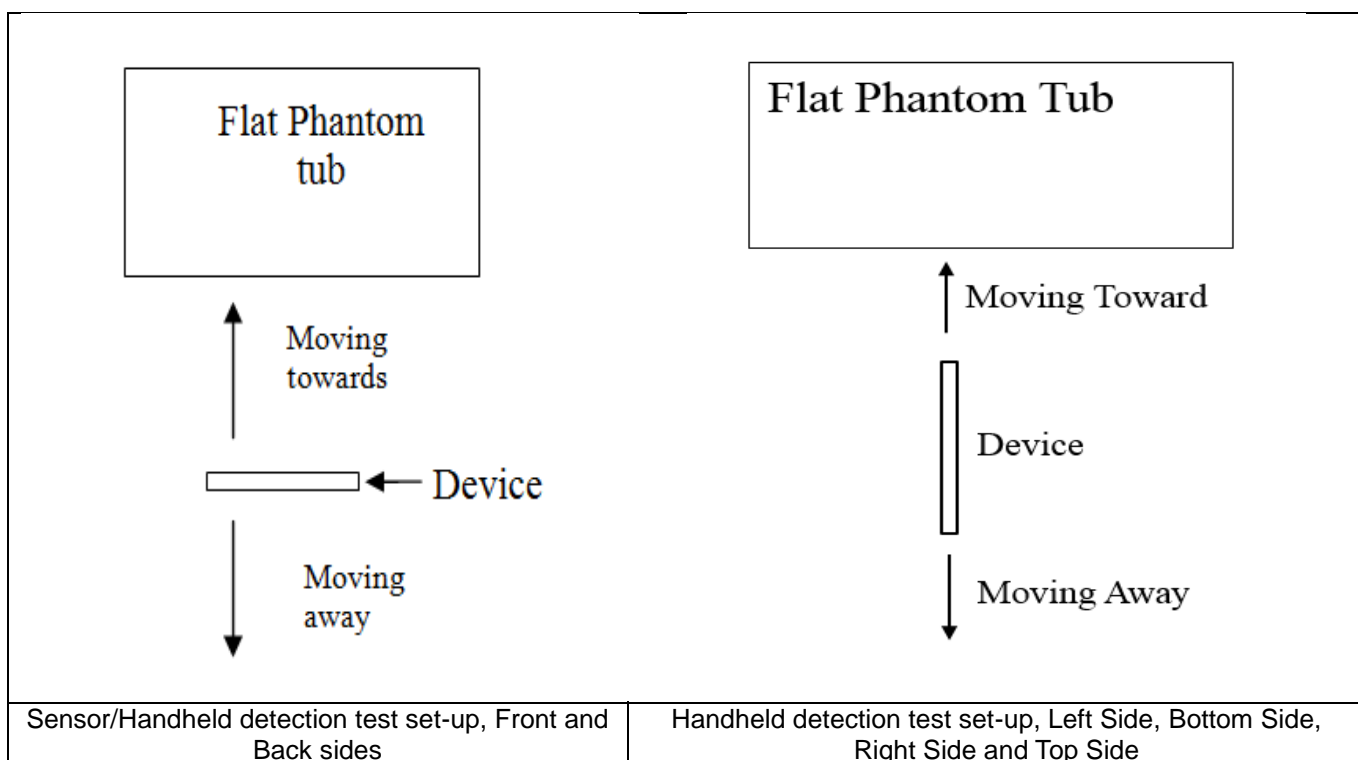

For Sample 3(1st source)

<P-Sensor>

Proximity Sensor Triggering Distance (mm)				
Position	Front		Back	
	Moving towards	Moving away	Moving towards	Moving away
Minimum	16	25	22	29

<Handheld for ANT 0>

Proximity Sensor Triggering Distance (mm)								
Position	Front		Back		Right Side		Bottom Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	6	12	12	18	2	8	12	19

<Handheld for ANT1>

Proximity Sensor Triggering Distance (mm)								
Position	Front		Back		Left Side		Bottom Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	5	13	13	20	8	14	13	19

<Handheld for ANT4>

Proximity Sensor Triggering Distance (mm)								
Position	Front		Back		Left Side		Top Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	6	13	10	17	3	10	13	20

<Handheld for ANT5>

Proximity Sensor Triggering Distance (mm)							
Position	Front		Back		Top Side		
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away	
Minimum	3	8	10	17	13	21	

<Handheld for ANT6>

Proximity Sensor Triggering Distance (mm)								
Position	Front		Back		Right Side		Top Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	6	14	9	16	6	13	12	19



For Sample 4(2nd source)

<P-Sensor>

Proximity Sensor Triggering Distance (mm)				
Position	Front		Back	
	Moving towards	Moving away	Moving towards	Moving away
Minimum	17	23	19	25

<Handheld for ANT 0>

Proximity Sensor Triggering Distance (mm)								
Position	Front		Back		Right Side		Bottom Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	7	12	12	18	2	7	11	17

<Handheld for ANT1>

Proximity Sensor Triggering Distance (mm)								
Position	Front		Back		Left Side		Bottom Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	4	9	12	18	8	13	12	19

<Handheld for ANT4>

Proximity Sensor Triggering Distance (mm)								
Position	Front		Back		Left Side		Top Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	5	10	9	15	3	8	11	17

<Handheld for ANT5>

Proximity Sensor Triggering Distance (mm)						
Position	Front		Back		Top Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	4	9	10	17	10	15

<Handheld for ANT6>

Proximity Sensor Triggering Distance (mm)								
Position	Front		Back		Right Side		Top Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	7	13	9	14	6	11	11	16

7. RF Exposure Limits

7.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

7.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

8. Specific Absorption Rate (SAR)

8.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

8.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

9. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

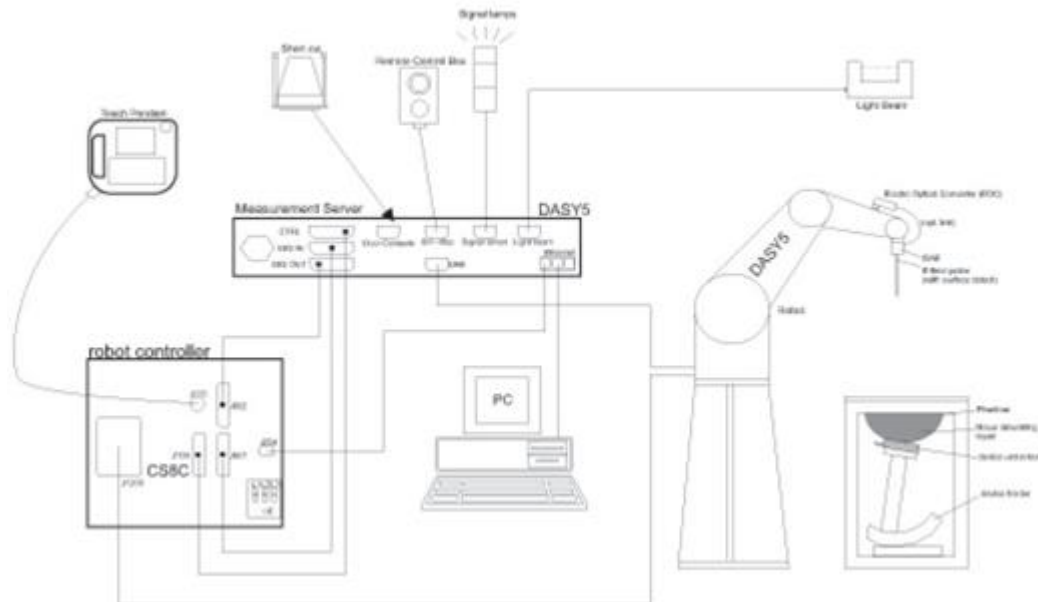


- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

9.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	4 MHz – 10 GHz Linearity: ±0.2 dB (30 MHz – 10 GHz)	
Directivity	±0.3 dB in TSL (rotation around probe axis) ±0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 µW/g – >100 mW/g Linearity: ±0.2 dB (noise: typically <1 µW/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

9.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Photo of DAE


9.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

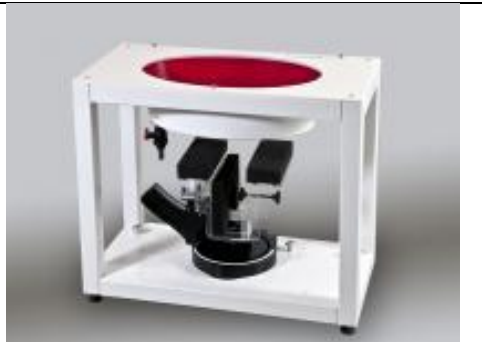Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices or for evaluating transmitters operating at low frequencies. ELI is fully compatible with standard and all known tissue simulating liquids.

9.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

10. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

10.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

10.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

10.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

10.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm 3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

10.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

10.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



11. Test Equipment List

Table with 6 columns: Manufacturer, Name of Equipment, Type/Model, Serial Number, Last Cal., Due Date. Rows include various equipment like System Validation Kits, Hygrometers, Positioners, Analyzers, etc.

Note:

- 1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check
2. Referring to KDB 865664 D01v01r04, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The justification data of dipole can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.

12. System Verification

12.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 11.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 11.2.

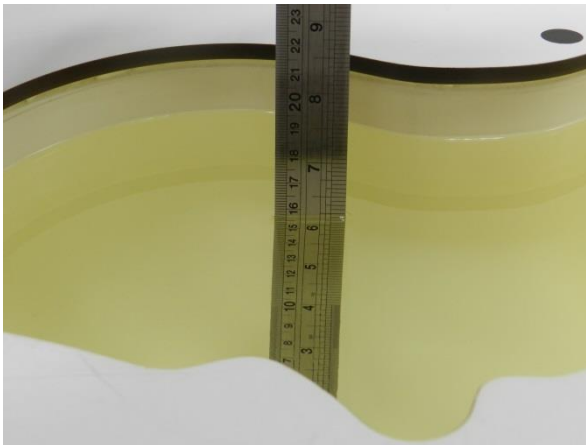


Fig 11.1 Photo of Liquid Height for Head SAR

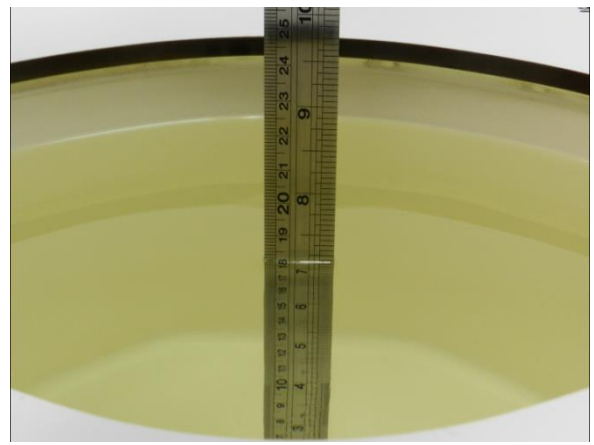


Fig 11.2 Photo of Liquid Height for Body SAR

12.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ε _r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε _r)	Conductivity Target (σ)	Permittivity Target (ε _r)	Delta (σ) (%)	Delta (ε _r) (%)	Limit (%)	Date
835	Head	22.6	0.902	41.240	0.90	41.50	0.22	-0.63	±5	2024/7/15
1900	Head	22.9	1.397	39.035	1.40	40.00	-0.21	-2.41	±5	2024/7/16
3500	Head	22.7	2.881	38.501	2.91	37.90	-1.00	1.59	±5	2024/7/17
2450	Head	22.6	1.805	38.508	1.80	39.20	0.28	-1.77	±5	2024/7/18
5250	Head	22.7	4.608	35.846	4.71	35.90	-2.17	-0.15	±5	2024/7/19
5600	Head	22.7	5.012	35.279	5.07	35.50	-1.14	-0.62	±5	2024/7/20
5750	Head	22.8	5.179	35.089	5.22	35.40	-0.79	-0.88	±5	2024/7/21
2600	Head	22.8	1.922	38.215	1.96	39.00	-1.94	-2.01	±5	2024/7/22
3900	Head	22.9	3.280	37.613	3.32	37.50	-1.20	0.30	±5	2024/7/23
2600	Head	22.6	1.924	38.309	1.96	39.00	-1.84	-1.77	±5	2024/7/24
3900	Head	22.9	3.227	38.419	3.32	37.50	-2.80	2.45	±5	2024/7/25
3700	Head	22.6	3.031	38.175	3.12	37.70	-2.85	1.26	±5	2024/7/21
2600	Head	22.7	1.916	38.227	1.96	39.00	-2.24	-1.98	±5	2024/8/13

12.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

<1g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2024/7/15	835	Head	50	4d091	3857	1650	0.472	9.45	9.44	-0.11
2024/7/16	1900	Head	50	5d118	3857	1650	2.050	39.30	41	4.33
2024/7/17	3500	Head	50	1037	3857	1650	3.200	65.40	64	-2.14
2024/7/18	2450	Head	50	1095	3857	1650	2.450	52.60	49	-6.84
2024/7/19	5250	Head	50	1113	3857	1650	3.770	81.50	75.4	-7.48
2024/7/20	5600	Head	50	1113	3857	1650	3.840	82.60	76.8	-7.02
2024/7/21	5750	Head	50	1113	3857	1650	4.040	80.80	80.8	0.00
2024/7/22	2600	Head	50	1112	3857	1650	2.620	55.10	52.4	-4.90
2024/7/23	3900	Head	50	1048	3857	1650	3.310	69.10	66.2	-4.20
2024/7/24	2600	Head	50	1112	3857	1650	2.660	55.10	53.2	-3.45
2024/7/25	3900	Head	50	1048	3857	1650	3.290	69.10	65.8	-4.78
2024/7/21	3700	Head	50	1008	3857	1650	3.170	67.20	63.4	-5.65
2024/8/13	2600	Head	50	1112	3857	1650	2.590	55.10	51.8	-5.99

<10g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2024/7/15	835	Head	50	4d091	3857	1650	0.311	6.22	6.22	0.00
2024/7/16	1900	Head	50	5d118	3857	1650	1.090	20.40	21.8	6.86
2024/7/17	3500	Head	50	1037	3857	1650	1.240	24.70	24.8	0.40
2024/7/18	2450	Head	50	1095	3857	1650	1.160	24.70	23.2	-6.07
2024/7/19	5250	Head	50	1113	3857	1650	1.090	23.30	21.8	-6.44
2024/7/20	5600	Head	50	1113	3857	1650	1.100	23.70	22	-7.17
2024/7/21	5750	Head	50	1113	3857	1650	1.180	23.00	23.6	2.61
2024/7/22	2600	Head	50	1112	3857	1650	1.200	24.80	24	-3.23
2024/7/23	3900	Head	50	1048	3857	1650	1.190	24.10	23.8	-1.24
2024/7/24	2600	Head	50	1112	3857	1650	1.220	24.80	24.4	-1.61
2024/7/25	3900	Head	50	1048	3857	1650	1.150	24.10	23	-4.56
2024/7/21	3700	Head	50	1008	3857	1650	1.190	24.40	23.8	-2.46
2024/8/13	2600	Head	50	1112	3857	1650	1.180	24.80	23.6	-4.84

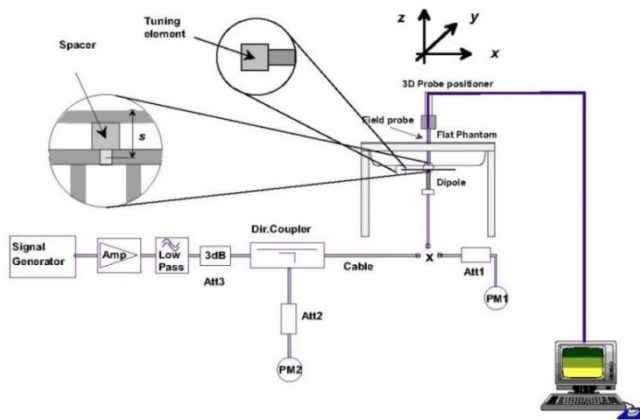


Fig 11.3.1 System Performance Check Setup



Fig 11.3.2 Setup Photo

13. RF Exposure Positions

13.1 Ear and handset reference point

Figure 12.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 12.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 12.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 12.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

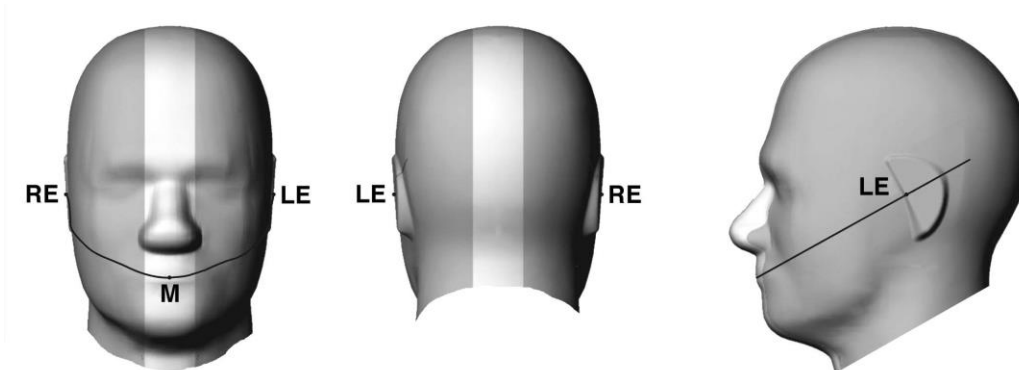


Fig 12.1.1 Front, back, and side views of SAM twin phantom

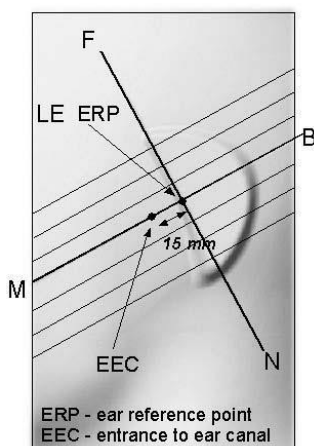


Fig 12.1.2 Close-up side view of phantom showing the ear region.

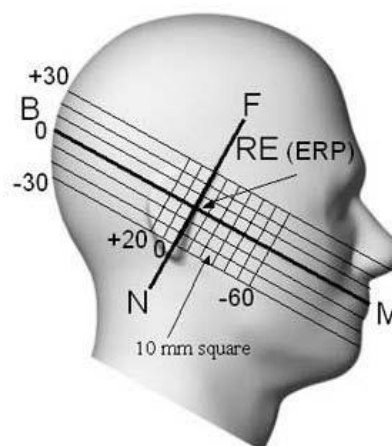


Fig 12.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

13.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 12.2.1 and Figure 12.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 12.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 12.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 12.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 12.2.3. The actual rotation angles should be documented in the test report.

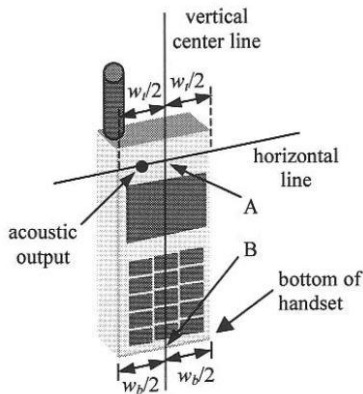


Fig 12.2.1 Handset vertical and horizontal reference lines—“fixed case”

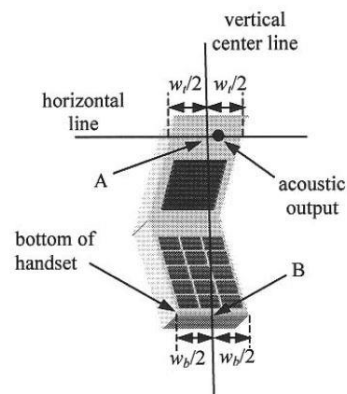


Fig 12.2.2 Handset vertical and horizontal reference lines—“clam-shell case”

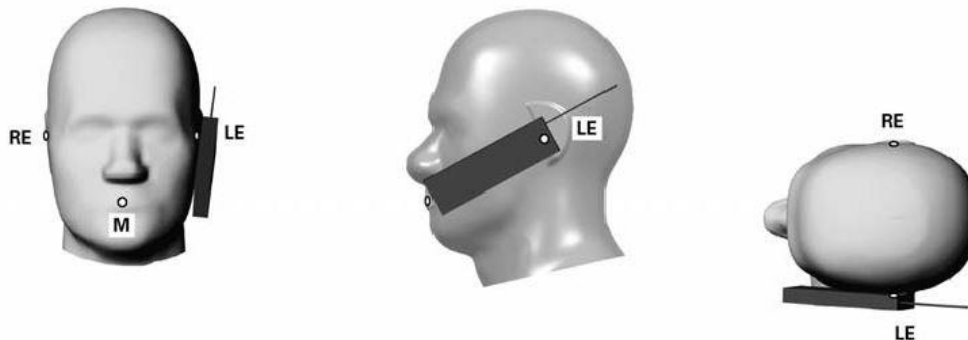


Fig 12.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

13.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 12.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

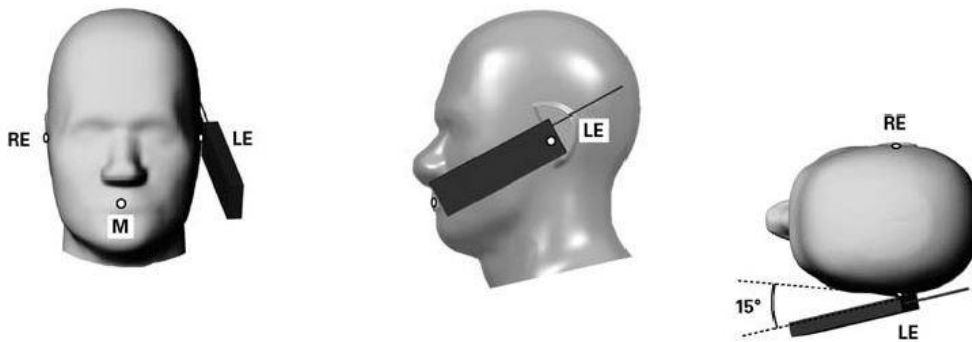


Fig 12.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

13.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 11.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

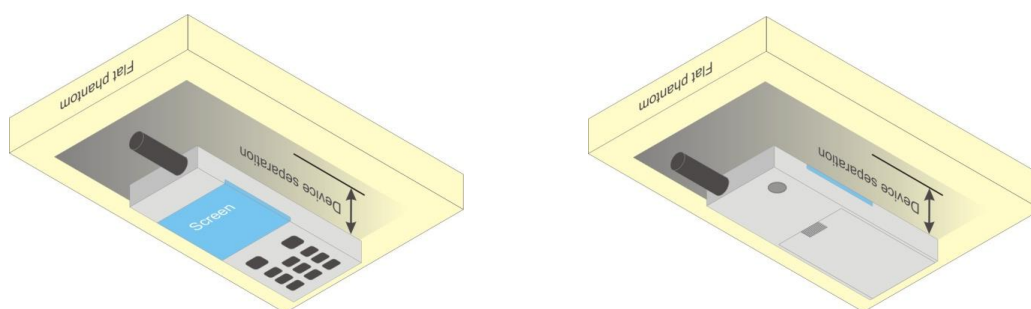


Fig 12.4 Body Worn Position

13.5 Product Specific 10g SAR Exposure

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, that can provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets and support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.6 The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

13.6 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9$ cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

14. Conducted RF Output Power (Unit: dBm)


The detailed conducted power table can refer to Appendix E.

<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM/64QAM/256QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM/256QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B5 / B26 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE B38 SAR test was covered by B41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band

10. According to May 2017 TCB workshop, for 16QAM and 64QAM, 256QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 256QAM, 64QAM and 16QAM signal modulation are correct.

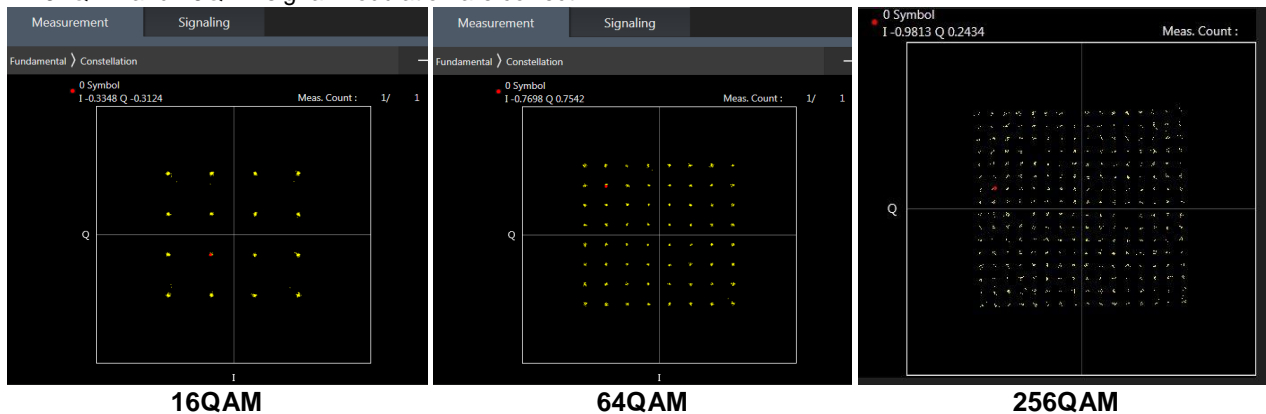

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- a. 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- b. "special subframe S" contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- c. Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

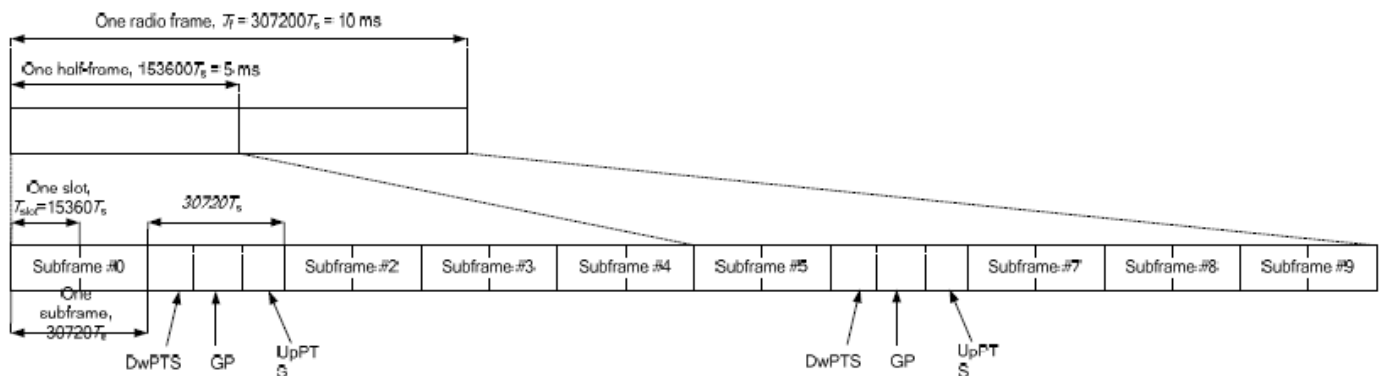


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink				Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS		
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink	
0	6592 · Ts	2192 · Ts	2560 · Ts	7680 · Ts	2192 · Ts	2560 · Ts	
1	19760 · Ts			20480 · Ts			
2	21952 · Ts			23040 · Ts			
3	24144 · Ts			25600 · Ts			
4	26336 · Ts	4384 · Ts	5120 · Ts	7680 · Ts	4384 · Ts	5120 · Ts	
5	6592 · Ts			20480 · Ts			
6	19760 · Ts			23040 · Ts			
7	21952 · Ts			12800 · Ts			
8	24144 · Ts			-			-
9	13168 · Ts	-	-	-	-	-	

Special subframe (30720·T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

For LTE TDD Power class 2

- i. Uplink-downlink configuration: 1. In a half-frame consisted of 5 subframes, uplink operation is in 2 uplink subframes and 1 special subframe.
- ii. special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- iii. for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(2+0.167)/5 = 43.3\%$
- iv. for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(2+0.143)/5 = 42.9\%$
- v. For TDD LTE SAR measurement, the duty cycle 1:2.33 (42.9 %) was used perform testing and considering the theoretical duty cycle of 43.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 42.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $43.3\%/42.9\% = 1.009$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.

For LTE TDD Power class 3

- i. Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- ii. special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- iii. for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.167)/5 = 63.3\%$
- iv. for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.143)/5 = 62.9\%$
- v. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.

The device can adjust uplink/downlink configuration automatically according to the transmitting power class level, as follows:

LTE TDD Band	Power Class level	support uplink/downlink configuration
LTE Band 41	> 23	1,2,3,4,5
	=23	0,1,2,3,4,5,6
	< 23	0,1,2,3,4,5,6



<LTE Carrier Aggregation>

The detailed LTE Carrier Aggregation conducted power table can refer to Appendix F.

General Note:

1. This device supports Carrier Aggregation on downlink for inter and intra band. For the device supports bands and bandwidths and configurations are provided as follow table was according to 3GPP.
2. In applying the existing power measurement procedures of KDB 941225 D05A for DL CA SAR test exclusion, only the subset with the largest number of combinations of frequency bands and CCs in each row need combination, and for this device that all the configurations were choose to power measurement.
3. The gray color table is covered by other combinations and no need to verify power.

2CC Downlink Carrier Aggregation				3CC Downlink Carrier Aggregation			
Number	Combination	4X4 MIMO	Covered by	Number	Combination	4X4 MIMO	Covered by
			Measurement Superset				Measurement Superset
1	CA_38C	38C, 38A		1	CA_41A-41C		
2	CA_41A-41A	41A-41A, 41A		2	CA_41D		
3	CA_41A-42A	41A-42A, 42A, 41A					
4	CA_41C	41C, 41A	3CC-1				
5	CA_42C	42C, 42A					
6	CA_5A-7A	7A					
7	CA_7A-26A	7A					
8	CA_7A-7A	7A-7A, 7A					
9	CA_7B	7B, 7A					
10	CA_7C	7C, 7A					

LTE Carrier Aggregation Conducted Power (Downlink)

- i. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device supports downlink three carrier aggregation. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For inter-band CA, the SCC selected highest bandwidth and near the middle of its transmission band. For SCC DL RB size and offset will base on the PCC corresponding RB allocation.
- vi. For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band.
- vii. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1|BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

LTE 4x4 MIMO (Downlink)

This device supports downlink 4x4 MIMO operations for LTE Band 7/38/41 only. Uplink transmission is limited to a single output stream. Power measurements were performed with downlink 4x4 MIMO active for the configuration with highest measured maximum conducted power with 4x4 downlink MIMO inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band.

Per FCC Guidance, SAR for downlink 4x4 MIMO was not needed since the maximum average output power in 4x4 downlink MIMO mode was not > 0.25 dB higher than the maximum output power with downlink 4x4 MIMO inactive. When carrier aggregation is applicable, power measurements were performed with the downlink carrier aggregation and 4x4 DL MIMO active for the configuration with highest measured maximum conducted power with downlink carrier aggregation inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band.

4X4 MIMO	Band
	LTE Band 7/38/41



LTE Carrier Aggregation Conducted Power (Uplink)

LTE Uplink CA	2CC Uplink Carrier Aggregation
Intra-band	Antenna Tx
CA_7C	Ant 1
CA_38C	Ant 4
CA_41C	Ant 4
CA_42C	Ant 5

<Intra-band>

General Note:

- i. The device supports intra-band uplink carrier aggregation for LTE B7/38/41/42 with a maximum of two uplink component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when not-contiguous RB allocation is implemented. The conducted power and MPR setting in this device are permanently implemented pre 3GPP requirement.
- ii. The device supports uplink carrier aggregation with a maximum of two uplink component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when not-contiguous RB allocation is implemented. The conducted power and MPR setting in this device are permanently implemented pre the 3GPP requirement.
- iii. According Nov. 2017 TCB workshop, the output power with uplink CA active was measured for the configuration with the highest reported SAR with single carrier for each exposure condition. The power was measured with wideband signal integration over both component carriers.
- iv. Additional SAR measurement for LTE UL CA with other DL CA combinations active were not required since the maximum output power for this configuration was not > 0.25dB higher than the maximum output power for UL CA active.

5G NR Output Power (Unit: dBm)

General Note:

1. 5G NR n5/n7/n26/n38/n41/n77/n78 is SA mode.
2. 5G NR n5/n41/n77/n78 is NSA mode.
3. For 5G NR test procedure was following step similar FCC KDB 941225 D05:
 - a. For DFT-OFDM and CP-OFDM output power measurement reduction, according to 38.101 maximum power reduction for power class2 and 3, the CP-OFDM mode will not higher than DFT-OFDM mode, therefore, similar FCC KDB 941225 D05 procedure for other modulation output power for each RB allocation configuration is > not ½ dB higher than the same configuration in DFT-s QPSK and the reported SAR for the DFT-s QPSK configuration is ≤ 1.45 W/kg; CP-OFDM testing is not required.
 - b. For DFT-OFDM output power measurement reduction, according to 38.101 maximum power reduction for power class2 and 3, for 16QAM/64QAM/256QAM and smaller bandwidth output power will spot check largest channel bandwidth worst RB configuration to ensure the 16QAM/64QAM/256QAM and smaller bandwidth output power will not ½ dB higher than the same configuration in the largest supported bandwidth.
 - c. SAR testing start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel
 - d. 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure
 - e. QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested
 - f. PI/2 BPSK/16QAM/64QAM/256QAM output powers according to 3GPP MPR will not ½ dB higher than the same configuration in QPSK, also reported SAR for the QPSK configuration is less than 1.45 W/kg, PI/2 BPSK /16QAM/64QAM/256QAM SAR testing are not required.
 - g. Smaller bandwidth output power for each RB allocation configuration for this device will not ½ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg, smaller bandwidth SAR testing is not required for this device
4. For 5G NR test, using FTM to perform SAR with default 100% transmission.
5. NSA and SA mode should perform SAR separately. For the maximum power of NSA mode is the same as SA total power level, so SA SAR can represent NSA mode SAR.
6. 5G NR NSA mode, the power level is the same as 5G NR SA mode, so 5G NR NSA mode and SA mode power table only show one time.
7. 5G NR supports CP-OFDM and DFT-s-OFDM modulation, for DFT-s-OFDM power is higher than CP-OFDM, so only show DFT-s-OFDM power table and chose DFT-s-OFDM to perform SAR testing.
8. For DFT-s-OFDM and CP-OFDM output power measurement reduction, according to 38.101 maximum power reduction for the CP-OFDM mode will not higher than DFT-s-OFDM mode, therefore, CP-OFDM measurement is unnecessary.
9. For 5G NR EN-DC mode, standalone SAR performed for 5G NR NSA band with the maximum power, EN-DC SAR summed EN-DC mode 5G NR standalone SAR and LTE standalone SAR, the result of EN-DC SAR is more conservatively.

<3GPP 38.101 MPR for EN-DC>

Table 6.2.2-1 Maximum power reduction (MPR) for power class 3

Modulation		MPR (dB)		
		Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM	Pi/2 BPSK	$\leq 3.5^1$	$\leq 1.2^1$	$\leq 0.2^1$
		$\leq 0.5^2$	$\leq 0.5^2$	0 ²
	QPSK		≤ 1	0
	16 QAM		≤ 2	≤ 1
	64 QAM		≤ 2.5	
CP-OFDM	256 QAM		≤ 4.5	
	QPSK	≤ 3		≤ 1.5
	16 QAM	≤ 3		≤ 2
	64 QAM		≤ 3.5	
	256 QAM		≤ 6.5	

NOTE 1: Applicable for UE operating in TDD mode with Pi/2 BPSK modulation and UE indicates support for UE capability *powerBoosting-pi2BPSK* and if the IE *powerBoostPi2BPSK* is set to 1 and 40 % or less slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79. The reference power of 0 dB MPR is 26 dBm.

NOTE 2: Applicable for UE operating in FDD mode, or in TDD mode in bands other than n40, n41, n77, n78 and n79 with Pi/2 BPSK modulation and if the IE *powerBoostPi2BPSK* is set to 0 and if more than 40 % of slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79.

Table 6.2.2-2 Maximum power reduction (MPR) for power class 2

Modulation		MPR (dB)		
		Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM	Pi/2 BPSK	≤ 3.5	≤ 0.5	0
	QPSK	≤ 3.5	≤ 1	0
	16 QAM	≤ 3.5	≤ 2	≤ 1
	64 QAM	≤ 3.5		≤ 2.5
	256 QAM		≤ 4.5	
CP-OFDM	QPSK	≤ 3.5	≤ 3	≤ 1.5
	16 QAM	≤ 3.5	≤ 3	≤ 2
	64 QAM		≤ 3.5	
	256 QAM		≤ 6.5	

<EN-DC combination>

ENDC	Main Antenna Tx	
	LTE TX	NR TX
DC_38A_n78A	ANT1	ANT5
DC_41A_n78A	ANT1	ANT5
DC_5A_n41A	ANT0	ANT4
DC_5A_n78A	ANT0	ANT5
DC_7A_n5A	ANT4	ANT0
DC_7A_n78A	ANT1	ANT5
DC_7A_n77A	ANT1	ANT5
DC_41A_n77A	ANT1	ANT5



15. Antenna Location

The detailed antenna location information can refer to SAR Test Setup Photos.

16. SAR Test Results

Spot Check General Note:

1. According to section 3.3, spot check conducted power test against the variant project based on the worst-case SAR condition from the original project was performed in this filing to demonstrate the test data from original project remains representative for the variant project. Detail Conducted power measurement referred to appendix E.
2. SAR spot check verification on the worst cases from the original model was performed to demonstrate the test data from original model remains representative for the variant model.
3. Per KDB 484596 D01 v02r03, the variant filings must demonstrate that the referenced test data remain valid for the variant device by including spot-check measurements that meet the following criteria:
 - a. Spot-check measurements shall be made in correspondence to the worst-case scenario reported in the reference device filing, i.e., for those conditions that are the closest to non-compliance
 - b. Spot-check measurements, while being always compliant with the applicable rule part(s) for the test under consideration, may show a deviation d_{dB} from the reference data no larger than 3 dB:
$$d_{dB} = |V_{dB} - R_{dB}| \leq 3 \text{ dB} \quad (1)$$
where between V_{dB} , the variant spot-check level in dB, and R_{dB} is the corresponding measurement level in dB for the reference model.
4. The Spot check results showed that deviation of the SAR results did not exceed 3 dB, therefore referring to the guidance in the KDB inquiry, SAR data reuse is justified.
5. 1st as parent model, 2nd as variant model.

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For SAR testing of Bluetooth signal with 83.3% theoretical duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle) *83.3%".
 - d. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - e. For BT/WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
 - f. For TDD LTE SAR measurement of power class 3, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The reported TDD LTE SAR (W/kg) = Measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
 - g. For TDD LTE SAR measurement of power class 2, the duty cycle 1:2.33 (42.9 %) was used perform testing and considering the theoretical duty cycle of 43.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 42.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $43.3\%/42.9\% = 1.009$ is applied to scale-up the measured SAR result. The reported TDD LTE SAR (W/kg) = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8 \text{ W/kg}$ or 2.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\leq 100 \text{ MHz}$
 - $\leq 0.6 \text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - $\leq 0.4 \text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200 \text{ MHz}$
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is $\geq 0.8 \text{ W/kg}$. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. The device implements the power management and proximity sensor /receiver detection/hotspot mode for SAR compliance at different exposure conditions (head, body-worn, hotspot, extremity). Details about the power management decision and sensor detection are provided in the operational description. And the device will invoke corresponding work scenarios power level base on frequency bands/antennas, which can refer to power table at

appendix E.

5. For WLAN when transmit simultaneous with WWAN/BT, power reduction will be activated to head exposure condition. For WLAN when transmit simultaneous with WWAN and Proximity sensors trigger, power reduction will be activated to body-worn and extremity exposure conditions.
6. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.
 - a. For this device SAR for WWAN/WLAN transmitter scaled to maximum output power mode for product specific 10g SAR is higher than 1.2W/kg of GSM850/1900, WCDMA Band II, LTE Band 2/5/7/38/41, 5GNR n7/n38/n41/n77/n78, WLAN 2.4GHz /WLAN5.2/5.8GHz, therefore product specific 10g SAR is necessary.
 - b. WLAN 5.3/5.5GHz tested the product specific 10g SAR since it has no hotspot mode.
 - c. When 10-g product specific 10g SAR is considered, SAR thresholds is specified in the procedures for SAR test reduction and exclusion should be multiplied by 2.5.
7. Although the headset SAR is greater than 0.8 W/kg, the headset SAR verified the worst of the non-headset SAR and less than non-headset SAR, so there is no need to be tested other channels.
8. According to Nov. 2017 TCB workshop, when the reported 1gSAR for UL CA configuration is <1.2 W/kg, UL CA 1gSAR is not required for all required test channels (PCC based).
9. Chose BT Front/Back at 5mm as Front at 15mm, Back at 18mm SAR to do co-located with WWAN analysis in body-worn exposure conditions.
- 10.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM/64QAM/256QAM output power for each RB allocation configuration is > not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM/256QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is > not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B5 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE B38 SAR test was covered by B41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band

5G NR Note:

1. For 5G NR test procedure was following step similar FCC KDB 941225 D05:
 - a. SAR testing start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
 - b. 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure
 - c. QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
 - d. PI/2 BPSK/16QAM/64QAM/256QAM output powers according to 3GPP MPR will not $\frac{1}{2}$ dB higher than the same configuration in QPSK, also reported SAR for the QPSK configuration is less than 1.45 W/kg, PI/2 BPSK /16QAM/64QAM/256QAM SAR testing are not required.
 - e. Smaller bandwidth output power for each RB allocation configuration for this device will not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg, smaller bandwidth SAR testing is not required for this device
 - f. For 5G FR1 n5 /n7/n26/n38/n41/n77 the maximum bandwidth does not support three non-overlapping channels, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

DSI status description:

The device has the following DSI state which used at different exposure condition.

Exposure Condition	DSI	Trigger Conditions
Head SAR	DSI 2	Receiver on
Body worn SAR	DSI 3	Sensor On
Hotspot SAR	DSI 7	Hotspot On
Extremity (Handheld) SAR	DSI 6	Sensor On
Sensor Off SAR	DSI 4	Sensor Off



16.1 Head SAR

Plot No.	No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Deviation d _{dB} (dB)
835MHz																							
	1st	GSM850	-	-	-	-	GPRS (2 Tx slots)	Right Cheek	0mm	Ant 0	DSI2	189	836.4	1	30.48	31.50	1.265	-	-	-0.01	0.263	0.333	0.24
01	2nd	GSM850	-	-	-	-	GPRS (2 Tx slots)	Right Cheek	0mm	Ant 0	DSI2	189	836.4	4	30.56	31.50	1.242	-	-	0.08	0.254	0.315	
	1st	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 0	DSI2	4182	836.4	1	22.88	24.00	1.294	-	-	0.01	0.192	0.248	0.31
02	2nd	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 0	DSI2	4182	836.4	4	22.98	24.00	1.265	-	-	0.09	0.183	0.231	
	1st	LTE Band 5	10M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	DSI2	20525	836.5	1	22.83	24.00	1.309	-	-	0.07	0.191	0.250	0.09
03	2nd	LTE Band 5	10M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	DSI2	20525	836.5	4	22.87	24.00	1.297	-	-	0.08	0.189	0.245	
	1st	LTE Band 26	15M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	DSI2	26865	831.5	1	22.94	24.00	1.276	-	-	0.09	0.142	0.181	0.73
04	2nd	LTE Band 26	15M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	DSI2	26865	831.5	4	22.98	24.00	1.265	-	-	0.02	0.121	0.153	
	1st	FR1 n26	20M	QPSK	1	1	DFT-SCS-15KHz	Right Cheek	0mm	Ant 0	DSI2	166300	831.5	1	23.28	24.00	1.180	-	-	0.1	0.140	0.165	1.21
05	2nd	FR1 n26	20M	QPSK	1	1	DFT-SCS-15KHz	Right Cheek	0mm	Ant 0	DSI2	166300	831.5	4	23.36	24.00	1.159	-	-	0.06	0.108	0.125	
1900MHz																							
	1st	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Right Cheek	0mm	Ant 0	DSI2	661	1880	1	23.73	25.50	1.503	-	-	-0.06	0.056	0.084	0.10
06	2nd	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Right Cheek	0mm	Ant 0	DSI2	661	1880	4	23.76	25.50	1.493	-	-	0.03	0.055	0.082	
	1st	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 0	DSI2	9400	1880	1	22.51	24.00	1.409	-	-	0.06	0.090	0.127	0.43
07	2nd	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 0	DSI2	9400	1880	4	22.57	24.00	1.390	-	-	0.09	0.083	0.115	
	1st	LTE Band 25	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	DSI2	26340	1880	1	23.13	24.00	1.222	-	-	0.01	0.109	0.133	1.79
08	2nd	LTE Band 2	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	DSI2	18900	1880	4	23.13	24.00	1.222	-	-	-0.02	0.072	0.088	
2600MHz																							
	1st	LTE Band 7	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI2	21100	2535	1	23.21	24.00	1.199	-	-	0.06	0.539	0.647	2.37
	2nd	LTE Band 7	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI2	21100	2535	4	23.26	24.00	1.186	-	-	0.06	0.316	0.375	
	2nd	LTE Band 7C	20M	QPSK	1	99	-	Left Cheek	0mm	Ant 1	DSI2	21100+21298	2535+2554.8	4	23.24	24.00	1.191	-	-	0.02	0.303	0.361	
	2nd	LTE Band 7 ENDC	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	DSI2	21100	2535	4	21.12	22.50	1.374	-	-	0.1	0.733	1.007	
	2nd	LTE Band 7 ENDC	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	DSI2	20850	2510	4	21.09	22.50	1.384	-	-	0.11	0.711	0.984	
	2nd	LTE Band 7 ENDC	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	DSI2	21350	2560	4	21.03	22.50	1.403	-	-	-0.05	0.698	0.979	
	2nd	LTE Band 7 ENDC	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 4	DSI2	21100	2535	4	20.71	22.00	1.346	-	-	-0.18	0.720	0.969	
	2nd	LTE Band 7 ENDC	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 4	DSI2	20850	2510	4	20.63	22.00	1.371	-	-	0.18	0.704	0.965	
	2nd	LTE Band 7 ENDC	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 4	DSI2	21350	2560	4	20.47	22.00	1.422	-	-	0.14	0.683	0.971	
	2nd	LTE Band 7 ENDC	20M	QPSK	100	0	-	Right Cheek	0mm	Ant 4	DSI2	21100	2535	4	20.63	22.00	1.371	-	-	-0.17	0.706	0.968	
09	2nd	LTE Band 7 ENDC	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI2	21100	2535	4	21.12	22.50	1.374	-	-	0.08	0.815	1.120	
	2nd	LTE Band 7 ENDC	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI2	20850	2510	4	21.09	22.50	1.384	-	-	0.17	0.806	1.115	
	2nd	LTE Band 7 ENDC	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI2	21350	2560	4	21.03	22.50	1.403	-	-	-0.05	0.784	1.100	
	2nd	LTE Band 7 ENDC	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 4	DSI2	21100	2535	4	20.71	22.00	1.346	-	-	0.12	0.759	1.022	
	2nd	LTE Band 7 ENDC	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 4	DSI2	20850	2510	4	20.63	22.00	1.371	-	-	0.01	0.738	1.012	
	2nd	LTE Band 7 ENDC	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 4	DSI2	21350	2560	4	20.47	22.00	1.422	-	-	0.1	0.741	1.054	
	2nd	LTE Band 7 ENDC	20M	QPSK	100	0	-	Right Tilted	0mm	Ant 4	DSI2	21100	2535	4	20.63	22.00	1.371	-	-	-0.17	0.735	1.008	
	2nd	LTE Band 7 ENDC	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 4	DSI2	21100	2535	4	21.12	22.50	1.374	-	-	0.08	0.217	0.298	
	2nd	LTE Band 7 ENDC	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 4	DSI2	21100	2535	4	20.71	22.00	1.346	-	-	-0.17	0.134	0.180	
	2nd	LTE Band 7 ENDC	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 4	DSI2	21100	2535	4	21.12	22.50	1.374	-	-	-0.03	0.268	0.368	
	2nd	LTE Band 7 ENDC	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 4	DSI2	21100	2535	4	20.71	22.00	1.346	-	-	0.14	0.244	0.328	
	2nd	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 4	DSI2	40620	2593	4	16.05	16.50	1.109	62.9	1.006	0.17	0.298	0.333	
	2nd	LTE Band 41	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 4	DSI2	40620	2593	4	16.02	16.50	1.117	62.9	1.006	-0.01	0.235	0.264	
	2nd	LTE Band 41	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI2	40620	2593	4	16.05	16.50	1.109	62.9	1.006	-0.02	0.536	0.598	
	2nd	LTE Band 41C	20M	QPSK	1	99	-	Right Tilted	0mm	Ant 4	DSI2	40620+40818	2593+2612.8	4	15.84	16.50	1.164	62.9	1.006	0.06	0.509	0.596	
	2nd	LTE Band 41	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 4	DSI2	40620	2593	4	16.02	16.50	1.117	62.9	1.006	-0.1	0.452	0.508	
	2nd	LTE Band 41	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 4	DSI2	40620	2593	4	16.05	16.50	1.109	62.9	1.006	0.19	0.090	0.100	
	2nd	LTE Band 41	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 4	DSI2	40620	2593	4	16.02	16.50	1.117	62.9	1.006	0.07	0.085	0.096	
	2nd	LTE Band 41	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 4	DSI2	40620	2593	4	16.05	16.50	1.109	62.9	1.006	-0.18	0.113	0.126	
	2nd	LTE Band 41	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 4	DSI2	40620	2593	4	16.02	16.50	1.117	62.9	1.006	0.03	0.111	0.125	
10	2nd	LTE Band 41 HUPE	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI2	40620	2593	4	18.48	19.50	1.265	42.9	1.009	-0.07	0.697	0.889	



FCC SAR Test Report

Report No. : FA422910

2nd	LTE Band 41 HUPUE	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI2	39750	2506	4	18.36	19.50	1.300	42.9	1.009	0.08	0.663	0.870	
2nd	LTE Band 41 HUPUE	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI2	40185	2549.5	4	18.43	19.50	1.279	42.9	1.009	0.01	0.659	0.851	
2nd	LTE Band 41 HUPUE	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI2	41055	2636.5	4	18.39	19.50	1.291	42.9	1.009	0.03	0.678	0.883	
2nd	LTE Band 41 HUPUE	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 4	DSI2	41490	2680	4	18.42	19.50	1.282	42.9	1.009	-0.08	0.661	0.855	
2nd	LTE Band 41 HUPUE	20M	QPSK	100	0	-	Right Tilted	0mm	Ant 4	DSI2	40620	2593	4	18.41	19.50	1.285	42.9	1.009	0.02	0.659	0.855	
2nd	LTE Band 41_ENDC	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI2	40620	2593	4	22.49	24.00	1.416	62.9	1.006	-0.03	0.048	0.068	
2nd	LTE Band 41_ENDC	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 1	DSI2	40620	2593	4	21.26	23.00	1.493	62.9	1.006	0.14	0.054	0.081	
2nd	LTE Band 41_ENDC	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI2	40620	2593	4	22.49	24.00	1.416	62.9	1.006	0.11	0.064	0.091	
2nd	LTE Band 41_ENDC	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 1	DSI2	40620	2593	4	21.26	23.00	1.493	62.9	1.006	-0.05	0.069	0.104	
2nd	LTE Band 41_ENDC	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI2	40620	2593	4	22.49	24.00	1.416	62.9	1.006	0.18	0.062	0.088	
2nd	LTE Band 41_ENDC	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 1	DSI2	40620	2593	4	21.26	23.00	1.493	62.9	1.006	0.14	0.066	0.099	
2nd	LTE Band 41_ENDC	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	DSI2	40620	2593	4	22.49	24.00	1.416	62.9	1.006	-0.07	0.082	0.117	
2nd	LTE Band 41_ENDC	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 1	DSI2	40620	2593	4	21.26	23.00	1.493	62.9	1.006	-0.17	0.080	0.120	
2nd	LTE Band 41 HPUUE_ENDC	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	DSI2	40620	2593	4	25.55	27.00	1.396	42.9	1.009	-0.09	0.105	0.148	
1st	FR1 n7	50M	QPSK	1	1	DFT-SCS-15KHz	Left Cheek	0mm	Ant 1	DSI2	507000	2535	1	23.25	24.00	1.189	-	-	-0.09	0.595	0.707	1.00
11 2nd	FR1 n7	50M	QPSK	1	1	DFT-SCS-15KHz	Left Cheek	0mm	Ant 1	DSI2	507000	2535	4	23.25	24.00	1.189	-	-	0.09	0.472	0.561	
2nd	FR1 n41	100M	QPSK	1	137	DFT-SCS-30KHz	Right Cheek	0mm	Ant 4	DSI2	518598	2592.99	4	14.96	16.00	1.271	-	-	0.08	0.654	0.831	
2nd	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Right Cheek	0mm	Ant 4	DSI2	518598	2592.99	4	14.93	16.00	1.279	-	-	0.01	0.667	0.853	
2nd	FR1 n41	100M	QPSK	270	0	DFT-SCS-30KHz	Right Cheek	0mm	Ant 4	DSI2	518598	2592.99	4	14.91	16.00	1.285	-	-	0.03	0.633	0.814	
12 2nd	FR1 n41	100M	QPSK	1	137	DFT-SCS-30KHz	Right Tilted	0mm	Ant 4	DSI2	518598	2592.99	4	14.96	16.00	1.271	-	-	0.08	0.789	1.002	
2nd	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Right Tilted	0mm	Ant 4	DSI2	518598	2592.99	4	14.93	16.00	1.279	-	-	-0.08	0.773	0.989	
2nd	FR1 n41	100M	QPSK	270	0	DFT-SCS-30KHz	Right Tilted	0mm	Ant 4	DSI2	518598	2592.99	4	14.91	16.00	1.285	-	-	0.08	0.752	0.967	
2nd	FR1 n41	100M	QPSK	1	137	DFT-SCS-30KHz	Left Cheek	0mm	Ant 4	DSI2	518598	2592.99	4	14.96	16.00	1.271	-	-	0.1	0.235	0.299	
2nd	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Left Cheek	0mm	Ant 4	DSI2	518598	2592.99	4	14.93	16.00	1.279	-	-	-0.18	0.242	0.310	
2nd	FR1 n41	100M	QPSK	1	137	DFT-SCS-30KHz	Left Tilted	0mm	Ant 4	DSI2	518598	2592.99	4	14.96	16.00	1.271	-	-	0.12	0.302	0.384	
2nd	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Left Tilted	0mm	Ant 4	DSI2	518598	2592.99	4	14.93	16.00	1.279	-	-	0.08	0.299	0.383	
3500MHz																						
1st	LTE Band 42	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 5	DSI2	42190	3460	1	19.25	20.00	1.189	62.9	1.006	-0.04	0.769	0.919	1.29
13 2nd	LTE Band 42	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 5	DSI2	42190	3460	4	19.31	20.00	1.172	62.9	1.006	-0.03	0.579	0.683	
2nd	LTE Band 42C	20M	QPSK	1	99	-	Left Cheek	0mm	Ant 5	DSI2	42190+42388	3460+3479.8	4	19.26	20.00	1.186	62.9	1.006	0.03	0.565	0.674	
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Right Cheek	0mm	Ant 5	DSI2	656000	3840	4	19.38	20.50	1.294	-	-	0.1	0.436	0.564	
2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Right Cheek	0mm	Ant 5	DSI2	656000	3840	4	19.36	20.50	1.300	-	-	0.12	0.429	0.558	
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Right Tilted	0mm	Ant 5	DSI2	656000	3840	4	19.38	20.50	1.294	-	-	-0.17	0.484	0.626	
2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Right Tilted	0mm	Ant 5	DSI2	656000	3840	4	19.36	20.50	1.300	-	-	-0.03	0.475	0.618	
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Left Cheek	0mm	Ant 5	DSI2	656000	3840	4	19.38	20.50	1.294	-	-	0.11	0.588	0.761	
2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Left Cheek	0mm	Ant 5	DSI2	656000	3840	4	19.36	20.50	1.300	-	-	-0.05	0.569	0.740	
14 2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Left Tilted	0mm	Ant 5	DSI2	656000	3840	4	19.38	20.50	1.294	-	-	0.02	0.658	0.852	
2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Left Tilted	0mm	Ant 5	DSI2	656000	3840	4	19.36	20.50	1.300	-	-	0.14	0.617	0.802	
2nd	FR1 n77 PC2	100M	QPSK	270	0	DFT-SCS-30KHz	Left Tilted	0mm	Ant 5	DSI2	656000	3840	4	19.33	20.50	1.309	-	-	0.06	0.608	0.796	
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Right Cheek	0mm	Ant 1	DSI2	656000	3840	4	23.40	24.00	1.148	-	-	-0.03	0.201	0.231	
2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Right Cheek	0mm	Ant 1	DSI2	656000	3840	4	23.05	24.00	1.245	-	-	0.14	0.207	0.258	
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Right Tilted	0mm	Ant 1	DSI2	656000	3840	4	23.40	24.00	1.148	-	-	0.11	0.220	0.253	
2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Right Tilted	0mm	Ant 1	DSI2	656000	3840	4	23.05	24.00	1.245	-	-	-0.05	0.213	0.265	
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Left Cheek	0mm	Ant 1	DSI2	656000	3840	4	23.40	24.00	1.148	-	-	0.18	0.347	0.398	
2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Left Cheek	0mm	Ant 1	DSI2	656000	3840	4	23.05	24.00	1.245	-	-	0.14	0.313	0.390	
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Left Tilted	0mm	Ant 1	DSI2	656000	3840	4	23.40	24.00	1.148	-	-	-0.17	0.139	0.160	
2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Left Tilted	0mm	Ant 1	DSI2	656000	3840	4	23.05	24.00	1.245	-	-	0.17	0.145	0.180	
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Right Cheek	0mm	Ant 2	DSI2	656000	3840	4	23.16	24.00	1.213	-	-	0.01	0.284	0.345	
2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Right Cheek	0mm	Ant 2	DSI2	656000	3840	4	22.70	24.00	1.349	-	-	0.1	0.253	0.341	
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Right Tilted	0mm	Ant 2	DSI2	656000	3840	4	23.16	24.00	1.213	-	-	-0.17	0.130	0.158	
2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Right Tilted	0mm	Ant 2	DSI2	656000	3840	4	22.70	24.00	1.349	-	-	0.04	0.121	0.163	
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Left Cheek	0mm	Ant 2	DSI2	656000	3840	4	23.16	24.00	1.213	-	-	-0.01	0.134	0.163	
2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Left Cheek	0mm	Ant 2	DSI2	656000	3840	4	22.70	24.00	1.349	-	-	-0.08	0.136	0.183	
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Left Tilted	0mm	Ant 2	DSI2	656000	3840	4	23.16	24.00	1.213	-	-	0.05	0.112	0.136	
2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Left Tilted	0mm	Ant 2	DSI2	656000	3840	4	22.70	24.00	1.349	-	-	0.06	0.113	0.152	



FCC SAR Test Report

Report No. : FA422910

2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Right Cheek	0mm	Ant 8	DSI2	656000	3840	4	21.23	22.00	1.194	-	-	-0.08	0.055	0.066
2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Right Cheek	0mm	Ant 8	DSI2	656000	3840	4	20.69	22.00	1.352	-	-	0.13	0.057	0.077
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Right Tilted	0mm	Ant 8	DSI2	656000	3840	4	21.23	22.00	1.194	-	-	0.12	0.032	0.038
2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Right Tilted	0mm	Ant 8	DSI2	656000	3840	4	20.69	22.00	1.352	-	-	0.03	0.047	0.064
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Left Cheek	0mm	Ant 8	DSI2	656000	3840	4	21.23	22.00	1.194	-	-	0.18	0.067	0.080
2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Left Cheek	0mm	Ant 8	DSI2	656000	3840	4	20.69	22.00	1.352	-	-	0.16	0.054	0.073
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Left Tilted	0mm	Ant 8	DSI2	656000	3840	4	21.23	22.00	1.194	-	-	-0.1	0.056	0.067
2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Left Tilted	0mm	Ant 8	DSI2	656000	3840	4	20.69	22.00	1.352	-	-	0.07	0.048	0.065

Plot No.	No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Deviation d _{dB} (dB)
2450MHz																			
	1st	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 6	standalone	11	2462	1	17.71	19.00	1.346	99.3	1.007	0.06	0.956	1.296	1.59
15	2nd	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 6	standalone	11	2462	4	17.78	19.00	1.324	99.3	1.007	-0.14	0.673	0.898	
	1st	Bluetooth	1Mbps	Left Cheek	0mm	Ant 6	Full Power	39	2441	1	12.05	13.50	1.396	77.57	1.074	-0.05	0.176	0.264	1.59
16	2nd	Bluetooth	1Mbps	Left Cheek	0mm	Ant 6	Full Power	39	2441	4	12.11	13.50	1.377	77.57	1.074	-0.01	0.124	0.183	
5000MHz																			
	1st	WLAN5.3GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 6	standalone	58	5290	1	13.45	15.00	1.429	94.16	1.062	-0.02	0.788	1.196	0.60
17	2nd	WLAN5.3GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 6	standalone	58	5290	4	13.69	15.00	1.352	94.16	1.062	0.14	0.725	1.041	
	2nd	WLAN5.3GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 6	standalone	58	5290	5	13.69	15.00	1.352	94.16	1.062	0.03	0.496	0.712	
	2nd	WLAN5.3GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 6	standalone	58	5290	6	13.69	15.00	1.352	94.16	1.062	-0.08	0.406	0.583	
	1st	WLAN5.5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 6	standalone	122	5610	1	12.51	14.00	1.409	94.16	1.062	-0.16	0.653	0.977	0.18
18	2nd	WLAN5.5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 6	standalone	122	5610	4	12.66	14.00	1.361	94.16	1.062	0.02	0.649	0.938	
	1st	WLAN5.8GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 6	standalone	155	5775	1	14.55	16.00	1.396	94.16	1.062	-0.01	0.736	1.091	0.37
19	2nd	WLAN5.8GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 6	standalone	155	5775	4	14.59	16.00	1.384	94.16	1.062	-0.06	0.682	1.002	
	2nd	WLAN5.8GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 6	standalone	155	5775	5	14.59	16.00	1.384	94.16	1.062	-0.08	0.319	0.469	
	2nd	WLAN5.8GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 6	standalone	155	5775	6	14.59	16.00	1.384	94.16	1.062	0.1	0.477	0.701	



16.2 Hotspot SAR

Plot No.	No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Deviation d _{dB} (dB)
835MHz																							
	1st	GSM850	-	-	-	-	GPRS (4 Tx slots)	Bottom Side	5mm	Ant 0	DSI7	251	848.8	1	24.55	26.00	1.396	-	-	0.02	1.030	1.438	1.88
20	2nd	GSM850	-	-	-	-	GPRS (4 Tx slots)	Bottom Side	5mm	Ant 0	DSI7	251	848.8	4	24.32	26.00	1.472	-	-	0.08	0.633	0.932	
	1st	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	DSI7	4233	846.6	1	22.69	24.00	1.352	-	-	-0.11	0.930	1.257	0.08
21	2nd	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	DSI7	4233	846.6	4	22.75	24.00	1.334	-	-	0.09	0.925	1.234	
	1st	WCDMA V	-	-	-	-	RMC 12.2Kbps	Bottom Side	5mm	Ant 0	DSI7	4182	836.4	1	22.88	24.00	1.294	-	-	-0.04	0.535	0.692	0.23
22	2nd	WCDMA V	-	-	-	-	RMC 12.2Kbps	Bottom Side	5mm	Ant 0	DSI7	4182	836.4	4	22.98	24.00	1.265	-	-	0.03	0.519	0.656	
	1st	LTE Band 5	10M	QPSK	1	0	-	Back	5mm	Ant 0	DSI7	20525	836.5	1	22.83	24.00	1.309	-	-	-0.09	1.080	1.414	0.38
22	2nd	LTE Band 5	10M	QPSK	1	0	-	Back	5mm	Ant 0	DSI7	20525	836.5	4	22.87	24.00	1.297	-	-	0.09	1.000	1.297	
	2nd	LTE Band 5	10M	QPSK	1	0	-	Back	5mm	Ant 0	DSI7	20525	836.5	5	22.87	24.00	1.297	-	-	-0.18	0.857	1.112	
	2nd	LTE Band 5	10M	QPSK	1	0	-	Back	5mm	Ant 0	DSI7	20525	836.5	6	22.87	24.00	1.297	-	-	0.1	0.921	1.195	
	1st	LTE Band 26	15M	QPSK	1	0	-	Back	5mm	Ant 0	DSI7	26865	831.5	1	22.94	24.00	1.276	-	-	-0.03	0.734	0.937	1.13
23	2nd	LTE Band 26	15M	QPSK	1	0	-	Back	5mm	Ant 0	DSI7	26865	831.5	4	22.98	24.00	1.265	-	-	-0.05	0.571	0.722	
	1st	FR1 n26	20M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 0	DSI7	166300	831.5	1	23.28	24.00	1.180	-	-	0.09	0.924	1.091	0.33
24	2nd	FR1 n26	20M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 0	DSI7	166300	831.5	4	23.36	24.00	1.159	-	-	0.06	0.873	1.012	
1900MHz																							
	1st	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Bottom Side	5mm	Ant 0	DSI7	810	1909.8	1	18.24	20.00	1.500	-	-	0.02	0.951	1.426	0.99
25	2nd	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Bottom Side	5mm	Ant 0	DSI7	810	1909.8	4	18.41	20.00	1.442	-	-	0.09	0.788	1.136	
	1st	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	5mm	Ant 0	DSI7	9400	1880	1	15.74	17.00	1.337	-	-	0.05	0.998	1.334	0.14
26	2nd	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	5mm	Ant 0	DSI7	9400	1880	4	15.85	17.00	1.303	-	-	0.09	0.991	1.291	
	2nd	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	5mm	Ant 0	DSI7	9400	1880	5	15.85	17.00	1.303	-	-	0.14	0.879	1.145	
	2nd	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	5mm	Ant 0	DSI7	9400	1880	6	15.85	17.00	1.303	-	-	-0.17	0.895	1.166	
	1st	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	DSI7	9400	1880	1	15.74	17.00	1.337	-	-	-0.05	0.550	0.735	0.17
	2nd	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	DSI7	9400	1880	4	15.85	17.00	1.303	-	-	0.02	0.542	0.706	
	1st	LTE Band 25	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 0	DSI7	26140	1860	1	16.14	17.00	1.219	-	-	0.02	1.120	1.365	0.84
27	2nd	LTE Band 2	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 0	DSI7	18700	1860	4	16.14	17.00	1.219	-	-	0.08	0.923	1.125	
2600MHz																							
	1st	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 1	DSI7	21100	2535	1	17.83	18.50	1.167	-	-	0.08	1.080	1.260	1.95
28	2nd	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 1	DSI7	21100	2535	4	17.93	18.50	1.140	-	-	-0.04	0.705	0.804	
	2nd	LTE Band 7C	20M	QPSK	1	99	-	Back	5mm	Ant 1	DSI7	21100+21298	2535+2554.8	4	17.69	18.50	1.205	-	-	0.03	0.661	0.797	
	2nd	LTE Band 7_ENDC	20M	QPSK	1	0	-	Front	5mm	Ant 4	DSI7	21100	2535	4	15.68	17.00	1.355	-	-	0.14	0.099	0.134	
	2nd	LTE Band 7_ENDC	20M	QPSK	50	0	-	Front	5mm	Ant 4	DSI7	21100	2535	4	15.66	17.00	1.361	-	-	-0.17	0.091	0.124	
	2nd	LTE Band 7_ENDC	20M	QPSK	1	0	-	Back	5mm	Ant 4	DSI7	21100	2535	4	15.68	17.00	1.355	-	-	-0.03	0.526	0.713	
	2nd	LTE Band 7_ENDC	20M	QPSK	50	0	-	Back	5mm	Ant 4	DSI7	21100	2535	4	15.66	17.00	1.361	-	-	-0.05	0.472	0.643	
	2nd	LTE Band 7_ENDC	20M	QPSK	1	0	-	Left Side	5mm	Ant 4	DSI7	21100	2535	4	15.68	17.00	1.355	-	-	0.01	0.150	0.203	
	2nd	LTE Band 7_ENDC	20M	QPSK	50	0	-	Left Side	5mm	Ant 4	DSI7	21100	2535	4	15.66	17.00	1.361	-	-	0.1	0.138	0.188	
	2nd	LTE Band 7_ENDC	20M	QPSK	1	0	-	Top Side	5mm	Ant 4	DSI7	21100	2535	4	15.68	17.00	1.355	-	-	-0.01	0.256	0.347	
	2nd	LTE Band 7_ENDC	20M	QPSK	50	0	-	Top Side	5mm	Ant 4	DSI7	21100	2535	4	15.66	17.00	1.361	-	-	-0.08	0.211	0.287	
	2nd	LTE Band 41	20M	QPSK	1	0	DFT-SCS-30KHz	Front	5mm	Ant 4	DSI7	40620	2593	4	13.57	14.00	1.104	62.9	1.006	0.08	0.120	0.133	
	2nd	LTE Band 41	20M	QPSK	50	0	DFT-SCS-30KHz	Front	5mm	Ant 4	DSI7	40620	2593	4	13.55	14.00	1.109	62.9	1.006	0.01	0.091	0.102	
	2nd	LTE Band 41	20M	QPSK	1	0	DFT-SCS-30KHz	Back	5mm	Ant 4	DSI7	40620	2593	4	13.57	14.00	1.104	62.9	1.006	0.03	0.285	0.317	
	2nd	LTE Band 41	20M	QPSK	50	0	DFT-SCS-30KHz	Back	5mm	Ant 4	DSI7	40620	2593	4	13.55	14.00	1.109	62.9	1.006	-0.08	0.325	0.363	
	2nd	LTE Band 41	20M	QPSK	1	0	DFT-SCS-30KHz	Left Side	5mm	Ant 4	DSI7	40620	2593	4	13.57	14.00	1.104	62.9	1.006	-0.08	0.098	0.109	
	2nd	LTE Band 41	20M	QPSK	50	0	DFT-SCS-30KHz	Left Side	5mm	Ant 4	DSI7	40620	2593	4	13.55	14.00	1.109	62.9	1.006	0.1	0.080	0.089	
	2nd	LTE Band 41	20M	QPSK	1	0	DFT-SCS-30KHz	Top Side	5mm	Ant 4	DSI7	40620	2593	4	13.57	14.00	1.104	62.9	1.006	0.1	0.461	0.512	
	2nd	LTE Band 41C	20M	QPSK	1	99	DFT-SCS-30KHz	Top Side	5mm	Ant 4	DSI7	40620+40818	2593+2612.8	4	13.40	14.00	1.148	62.9	1.006	0.05	0.439	0.507	
	2nd	LTE Band 41	20M	QPSK	50	0	DFT-SCS-30KHz	Top Side	5mm	Ant 4	DSI7	40620	2593	4	13.55	14.00	1.109	62.9	1.006	-0.17	0.376	0.420	
	2nd	LTE Band 41 HUPE	20M	QPSK	1	0	DFT-SCS-30KHz	Top Side	5mm	Ant 4	DSI7	40620	2593	4	15.95	17.00	1.274	42.9	1.009	0.01	0.493	0.633	
	2nd	LTE Band 41 HUPE	20M	QPSK	1	0	DFT-SCS-30KHz	Top Side	5mm	Ant 4	DSI7	39750	2506	4	15.91	17.00	1.285	42.9	1.009	0.11	0.433	0.562	



FCC SAR Test Report

Report No. : FA422910

2nd	LTE Band 41 HUPE	20M	QPSK	1	0	DFT-SCS-30KHz	Top Side	5mm	Ant 4	DSI7	40185	2549.5	4	15.83	17.00	1.309	42.9	1.009	-0.05	0.461	0.609	
2nd	LTE Band 41 HUPE	20M	QPSK	1	0	DFT-SCS-30KHz	Top Side	5mm	Ant 4	DSI7	41055	2636.5	4	15.87	17.00	1.297	42.9	1.009	0.18	0.458	0.599	
2nd	LTE Band 41 HUPE	20M	QPSK	1	0	DFT-SCS-30KHz	Top Side	5mm	Ant 4	DSI7	41490	2680	4	15.94	17.00	1.276	42.9	1.009	0.14	0.439	0.565	
2nd	LTE Band 41 HUPE	20M	QPSK	100	0	DFT-SCS-30KHz	Top Side	5mm	Ant 4	DSI7	40620	2593	4	15.91	17.00	1.285	42.9	1.009	-0.17	0.447	0.580	
2nd	LTE Band 41_ENDC	20M	QPSK	1	0	DFT-SCS-30KHz	Front	5mm	Ant 1	DSI7	40620	2593	4	19.58	21.00	1.387	62.9	1.006	0.12	0.429	0.598	
2nd	LTE Band 41_ENDC	20M	QPSK	50	0	DFT-SCS-30KHz	Front	5mm	Ant 1	DSI7	40620	2593	4	19.56	21.00	1.393	62.9	1.006	0.08	0.423	0.593	
2nd	LTE Band 41_ENDC	20M	QPSK	1	0	DFT-SCS-30KHz	Back	5mm	Ant 1	DSI7	40620	2593	4	19.58	21.00	1.387	62.9	1.006	-0.06	0.713	0.995	
2nd	LTE Band 41_ENDC	20M	QPSK	1	0	DFT-SCS-30KHz	Back	5mm	Ant 1	DSI7	39750	2506	4	19.53	21.00	1.403	62.9	1.006	-0.03	0.672	0.948	
2nd	LTE Band 41_ENDC	20M	QPSK	1	0	DFT-SCS-30KHz	Back	5mm	Ant 1	DSI7	40185	2549.5	4	19.49	21.00	1.416	62.9	1.006	0.14	0.675	0.961	
2nd	LTE Band 41_ENDC	20M	QPSK	1	0	DFT-SCS-30KHz	Back	5mm	Ant 1	DSI7	41055	2636.5	4	19.51	21.00	1.409	62.9	1.006	0.11	0.689	0.977	
2nd	LTE Band 41_ENDC	20M	QPSK	1	0	DFT-SCS-30KHz	Back	5mm	Ant 1	DSI7	41490	2680	4	19.48	21.00	1.419	62.9	1.006	-0.05	0.663	0.946	
2nd	LTE Band 41_ENDC	20M	QPSK	50	0	DFT-SCS-30KHz	Back	5mm	Ant 1	DSI7	40620	2593	4	19.56	21.00	1.393	62.9	1.006	0.18	0.708	0.992	
2nd	LTE Band 41_ENDC	20M	QPSK	50	0	DFT-SCS-30KHz	Back	5mm	Ant 1	DSI7	39750	2506	4	19.55	21.00	1.396	62.9	1.006	-0.17	0.668	0.938	
2nd	LTE Band 41_ENDC	20M	QPSK	50	0	DFT-SCS-30KHz	Back	5mm	Ant 1	DSI7	40185	2549.5	4	19.50	21.00	1.413	62.9	1.006	0.17	0.683	0.971	
2nd	LTE Band 41_ENDC	20M	QPSK	50	0	DFT-SCS-30KHz	Back	5mm	Ant 1	DSI7	41055	2636.5	4	19.43	21.00	1.435	62.9	1.006	-0.05	0.687	0.992	
2nd	LTE Band 41_ENDC	20M	QPSK	50	0	DFT-SCS-30KHz	Back	5mm	Ant 1	DSI7	41490	2680	4	19.52	21.00	1.406	62.9	1.006	0.01	0.691	0.977	
2nd	LTE Band 41_ENDC	20M	QPSK	100	0	DFT-SCS-30KHz	Back	5mm	Ant 1	DSI7	40620	2593	4	19.54	21.00	1.400	62.9	1.006	-0.06	0.701	0.987	
2nd	LTE Band 41_ENDC	20M	QPSK	1	0	DFT-SCS-30KHz	Left Side	5mm	Ant 1	DSI7	40620	2593	4	19.58	21.00	1.387	62.9	1.006	0.1	0.416	0.580	
2nd	LTE Band 41_ENDC	20M	QPSK	50	0	DFT-SCS-30KHz	Left Side	5mm	Ant 1	DSI7	40620	2593	4	19.56	21.00	1.393	62.9	1.006	-0.17	0.345	0.484	
2nd	LTE Band 41_ENDC	20M	QPSK	1	0	DFT-SCS-30KHz	Bottom Side	5mm	Ant 1	DSI7	40620	2593	4	19.58	21.00	1.387	62.9	1.006	0.04	0.564	0.787	
2nd	LTE Band 41_ENDC	20M	QPSK	1	0	DFT-SCS-30KHz	Bottom Side	5mm	Ant 1	DSI7	40620	2593	4	19.53	21.00	1.403	62.9	1.006	0.08	0.522	0.737	
2nd	LTE Band 41_ENDC	20M	QPSK	1	0	DFT-SCS-30KHz	Bottom Side	5mm	Ant 1	DSI7	40620	2593	4	19.49	21.00	1.416	62.9	1.006	0.01	0.531	0.756	
2nd	LTE Band 41_ENDC	20M	QPSK	1	0	DFT-SCS-30KHz	Bottom Side	5mm	Ant 1	DSI7	40620	2593	4	19.51	21.00	1.409	62.9	1.006	0.03	0.546	0.774	
2nd	LTE Band 41_ENDC	20M	QPSK	1	0	DFT-SCS-30KHz	Bottom Side	5mm	Ant 1	DSI7	40620	2593	4	19.48	21.00	1.419	62.9	1.006	-0.08	0.553	0.789	
2nd	LTE Band 41_ENDC	20M	QPSK	50	0	DFT-SCS-30KHz	Bottom Side	5mm	Ant 1	DSI7	40620	2593	4	19.56	21.00	1.393	62.9	1.006	-0.01	0.470	0.659	
2nd	LTE Band 41_ENDC	20M	QPSK	50	0	DFT-SCS-30KHz	Bottom Side	5mm	Ant 1	DSI7	40620	2593	4	19.55	21.00	1.396	62.9	1.006	-0.08	0.481	0.676	
2nd	LTE Band 41_ENDC	20M	QPSK	50	0	DFT-SCS-30KHz	Bottom Side	5mm	Ant 1	DSI7	40620	2593	4	19.50	21.00	1.413	62.9	1.006	0.1	0.465	0.661	
2nd	LTE Band 41_ENDC	20M	QPSK	50	0	DFT-SCS-30KHz	Bottom Side	5mm	Ant 1	DSI7	40620	2593	4	19.43	21.00	1.435	62.9	1.006	-0.18	0.477	0.689	
2nd	LTE Band 41_ENDC	20M	QPSK	50	0	DFT-SCS-30KHz	Bottom Side	5mm	Ant 1	DSI7	40620	2593	4	19.52	21.00	1.406	62.9	1.006	0.1	0.442	0.625	
2nd	LTE Band 41_ENDC	20M	QPSK	100	0	DFT-SCS-30KHz	Bottom Side	5mm	Ant 1	DSI7	40620	2593	4	19.54	21.00	1.400	62.9	1.006	0.04	0.564	0.794	
29	2nd LTE Band 41 HUPE_ENDC	20M	QPSK	1	0	DFT-SCS-30KHz	Back	5mm	Ant 1	DSI7	40620	2593	4	22.64	24.00	1.368	42.9	1.009	-0.07	0.900	1.242	
2nd	LTE Band 41 HUPE_ENDC	20M	QPSK	1	0	DFT-SCS-30KHz	Back	5mm	Ant 1	DSI7	40620	2593	5	22.64	24.00	1.368	42.9	1.009	-0.17	0.865	1.194	
2nd	LTE Band 41 HUPE_ENDC	20M	QPSK	1	0	DFT-SCS-30KHz	Back	5mm	Ant 1	DSI7	40620	2593	6	22.64	24.00	1.368	42.9	1.009	0.04	0.892	1.231	
1st	FR1 n7	50M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 1	DSI7	507000	2535	1	17.95	19.00	1.274	-	-	0.02	0.964	1.228	0.27
30	2nd FR1 n7	50M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 1	DSI7	507000	2535	4	17.99	19.00	1.262	-	-	0.03	0.915	1.155	
2nd	FR1 n41	100M	QPSK	1	137	DFT-SCS-30KHz	Front	5mm	Ant 4	DSI7	518598	2592.99	4	11.51	12.50	1.256	-	-	0.06	0.176	0.221	
2nd	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Front	5mm	Ant 4	DSI7	518598	2592.99	4	11.48	12.50	1.265	-	-	-0.09	0.190	0.240	
2nd	FR1 n41	100M	QPSK	1	137	DFT-SCS-30KHz	Back	5mm	Ant 4	DSI7	518598	2592.99	4	11.51	12.50	1.256	-	-	0.13	0.568	0.713	
31	2nd FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 4	DSI7	518598	2592.99	4	11.48	12.50	1.265	-	-	-0.09	0.571	0.722	
2nd	FR1 n41	100M	QPSK	1	137	DFT-SCS-30KHz	Left Side	5mm	Ant 4	DSI7	518598	2592.99	4	11.51	12.50	1.256	-	-	0.03	0.220	0.276	
2nd	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Left Side	5mm	Ant 4	DSI7	518598	2592.99	4	11.48	12.50	1.265	-	-	0.18	0.214	0.271	
2nd	FR1 n41	100M	QPSK	1	137	DFT-SCS-30KHz	Top Side	5mm	Ant 4	DSI7	518598	2592.99	4	11.51	12.50	1.256	-	-	-0.1	0.559	0.702	
2nd	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Top Side	5mm	Ant 4	DSI7	518598	2592.99	4	11.48	12.50	1.265	-	-	0.07	0.495	0.626	
3500MHz																						
1st	LTE Band 42	20M	QPSK	1	0	-	Back	5mm	Ant 5	DSI7	42190	3460	1	15.69	16.50	1.205	62.9	1.006	0.1	0.643	0.779	1.01
32	2nd LTE Band 42	20M	QPSK	1	0	-	Back	5mm	Ant 5	DSI7	42190	3460	4	15.87	16.50	1.156	62.9	1.006	-0.09	0.531	0.618	
2nd	LTE Band 42C	20M	QPSK	1	99	-	Back	5mm	Ant 5	DSI7	42190+42388	3460+3479.8	4	15.68	16.50	1.208	62.9	1.006	0.03	0.501	0.609	
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Front	5mm	Ant 5	DSI7	656000	3840	4	16.89	18.00	1.291	-	-	0.18	0.161	0.208	
2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Front	5mm	Ant 5	DSI7	656000	3840	4	16.87	18.00	1.297	-	-	-0.1	0.174	0.226	
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Back	5mm	Ant 5	DSI7	656000	3840	4	16.89	18.00	1.291	-	-	-0.18	0.507	0.655	
2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 5	DSI7	656000	3840	4	16.87	18.00	1.297	-	-	0.19	0.469	0.608	
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Left Side	5mm	Ant 5	DSI7	656000	3840	4	16.89	18.00	1.291	-	-	0.03	0.017	0.022	
2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Left Side	5mm	Ant 5	DSI7	656000	3840	4	16.87	18.00	1.297	-	-	-0.15	0.019	0.025	
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Right Side	5mm	Ant 5	DSI7	656000	3840	4	16.89	18.00	1.291	-	-	-0.15	0.069	0.089	
2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Right Side	5mm	Ant 5	DSI7	656000	3840	4	16.87	18.00	1.297	-	-	0.11	0.066	0.086	



FCC SAR Test Report

Report No. : FA422910

2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Top Side	5mm	Ant 5	DS17	656000	3840	4	16.89	18.00	1.291	-	-	-0.17	0.459	0.593	
2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Top Side	5mm	Ant 5	DS17	656000	3840	4	16.87	18.00	1.297	-	-	-0.08	0.481	0.624	
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Front	5mm	Ant 1	DS17	656000	3840	4	19.48	20.00	1.127	-	-	-0.17	0.520	0.586	
2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Front	5mm	Ant 1	DS17	656000	3840	4	19.46	20.00	1.132	-	-	-0.08	0.422	0.478	
33	2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Back	5mm	Ant 1	DS17	656000	3840	4	19.48	20.00	1.127	-	-	-0.04	1.080	1.217
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Back	5mm	Ant 1	DS17	656000	3840	5	19.48	20.00	1.127	-	-	0.16	0.985	1.110	
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Back	5mm	Ant 1	DS17	656000	3840	6	19.48	20.00	1.127	-	-	-0.1	0.996	1.123	
2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 1	DS17	656000	3840	4	19.46	20.00	1.132	-	-	-0.08	1.050	1.189	
2nd	FR1 n77 PC2	100M	QPSK	270	0	DFT-SCS-30KHz	Back	5mm	Ant 1	DS17	656000	3840	4	19.43	20.00	1.140	-	-	0.17	1.010	1.152	
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Left Side	5mm	Ant 1	DS17	656000	3840	4	19.48	20.00	1.127	-	-	0.18	0.533	0.601	
2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Left Side	5mm	Ant 1	DS17	656000	3840	4	19.46	20.00	1.132	-	-	-0.04	0.479	0.542	
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Right Side	5mm	Ant 1	DS17	656000	3840	4	19.48	20.00	1.127	-	-	-0.13	0.019	0.021	
2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Right Side	5mm	Ant 1	DS17	656000	3840	4	19.46	20.00	1.132	-	-	-0.13	0.018	0.020	
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Top Side	5mm	Ant 1	DS17	656000	3840	4	19.48	20.00	1.127	-	-	0.06	0.032	0.036	
2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Top Side	5mm	Ant 1	DS17	656000	3840	4	19.46	20.00	1.132	-	-	-0.03	0.028	0.032	
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Bottom Side	5mm	Ant 1	DS17	656000	3840	4	19.48	20.00	1.127	-	-	-0.03	0.405	0.457	
2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Bottom Side	5mm	Ant 1	DS17	656000	3840	4	19.46	20.00	1.132	-	-	0.08	0.560	0.634	
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Front	5mm	Ant 2	DS17	656000	3840	4	18.75	19.50	1.189	-	-	0.08	0.047	0.056	
2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Front	5mm	Ant 2	DS17	656000	3840	4	18.73	19.50	1.194	-	-	0.01	0.045	0.054	
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Back	5mm	Ant 2	DS17	656000	3840	4	18.75	19.50	1.189	-	-	-0.08	0.523	0.622	
2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 2	DS17	656000	3840	4	18.73	19.50	1.194	-	-	-0.08	0.410	0.490	
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Left Side	5mm	Ant 2	DS17	656000	3840	4	18.75	19.50	1.189	-	-	-0.18	0.223	0.265	
2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Left Side	5mm	Ant 2	DS17	656000	3840	4	18.73	19.50	1.194	-	-	0.1	0.246	0.294	
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Right Side	5mm	Ant 2	DS17	656000	3840	4	18.75	19.50	1.189	-	-	0.08	0.013	0.015	
2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Right Side	5mm	Ant 2	DS17	656000	3840	4	18.73	19.50	1.194	-	-	-0.17	0.009	0.011	
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Top Side	5mm	Ant 2	DS17	656000	3840	4	18.75	19.50	1.189	-	-	-0.03	0.020	0.024	
2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Top Side	5mm	Ant 2	DS17	656000	3840	4	18.73	19.50	1.194	-	-	0.14	0.024	0.029	
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Bottom Side	5mm	Ant 2	DS17	656000	3840	4	18.75	19.50	1.189	-	-	0.11	0.015	0.018	
2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Bottom Side	5mm	Ant 2	DS17	656000	3840	4	18.73	19.50	1.194	-	-	-0.05	0.012	0.014	
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Front	5mm	Ant 8	DS17	656000	3840	4	15.81	16.50	1.172	-	-	0.08	0.010	0.012	
2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Front	5mm	Ant 8	DS17	656000	3840	4	15.77	16.50	1.183	-	-	0.01	0.015	0.018	
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Back	5mm	Ant 8	DS17	656000	3840	4	15.81	16.50	1.172	-	-	0.03	0.513	0.601	
2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 8	DS17	656000	3840	4	15.77	16.50	1.183	-	-	-0.08	0.456	0.539	
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Right Side	5mm	Ant 8	DS17	656000	3840	4	15.81	16.50	1.172	-	-	-0.18	0.077	0.090	
2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Right Side	5mm	Ant 8	DS17	656000	3840	4	15.77	16.50	1.183	-	-	0.1	0.081	0.096	
2nd	FR1 n77 PC2	100M	QPSK	1	1	DFT-SCS-30KHz	Top Side	5mm	Ant 8	DS17	656000	3840	4	15.81	16.50	1.172	-	-	0.12	0.011	0.013	
2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Top Side	5mm	Ant 8	DS17	656000	3840	4	15.77	16.50	1.183	-	-	0.08	0.012	0.014	

Plot No.	No.	Band	Mode	Test Position (mm)	Gap	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Deviation d _{dB} (dB)
2450MHz																			
	1st	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	Ant 6	Simultaneous	11	2462	1	13.69	15.00	1.352	99.3	1.007	-0.07	0.402	0.547	0.02
34	2nd	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	Ant 6	Simultaneous	11	2462	4	13.89	15.00	1.291	99.3	1.007	0.06	0.418	0.544	0.02
	1st	Bluetooth	1Mbps	Back	5mm	Ant 6	Full Power	39	2441	1	12.05	13.50	1.396	77.57	1.074	-0.09	0.082	0.123	0.18
35	2nd	Bluetooth	1Mbps	Back	5mm	Ant 6	Full Power	39	2441	4	12.11	13.50	1.377	77.57	1.074	0.18	0.080	0.118	0.18
5000MHz																			
	1st	WLAN5.2GHz	802.11ac-VHT80 MCS0	Top Side	5mm	Ant 6	Simultaneous	42	5210	1	9.85	11.00	1.303	94.16	1.062	-0.07	0.391	0.541	0.05
36	2nd	WLAN5.2GHz	802.11ac-VHT80 MCS0	Top Side	5mm	Ant 6	Simultaneous	42	5210	4	10.02	11.00	1.253	94.16	1.062	0.04	0.402	0.535	0.05
	1st	WLAN5.8GHz	802.11ac-VHT80 MCS0	Top Side	5mm	Ant 6	Simultaneous	155	5775	1	9.59	11.00	1.384	94.16	1.062	0.05	0.419	0.615	0.36
37	2nd	WLAN5.8GHz	802.11ac-VHT80 MCS0	Top Side	5mm	Ant 6	Simultaneous	155	5775	4	9.63	11.00	1.371	94.16	1.062	0.08	0.389	0.566	0.36



16.3 Body-Worn SAR

Plot No.	No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Headset	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Deviation d _{dB} (dB)	
835MHz																									
	1st	GSM850	-	-	-	-	GPRS (4 Tx slots)	Back	5mm	Ant 0	-	DS13	189	836.4	1	25.32	27.00	1.472	-	-	0.01	0.981	1.444	0.98	
38	2nd	GSM850	-	-	-	-	GPRS (4 Tx slots)	Back	5mm	Ant 0	-	DS13	189	836.4	4	25.48	27.00	1.419	-	-	0.01	0.782	1.110		
	1st	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	-	DS13	4233	846.6	1	22.69	24.00	1.352	-	-	-0.11	0.930	1.257	0.02	
39	2nd	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	-	DS13	4233	846.6	4	22.75	24.00	1.334	-	-	0.09	0.925	1.234		
	1st	WCDMA V	-	-	-	-	RMC 12.2Kbps	Front	5mm	Ant 0	-	DS13	4182	836.4	1	22.88	24.00	1.294	-	-	0.08	0.329	0.426	0.18	
	2nd	WCDMA V	-	-	-	-	RMC 12.2Kbps	Front	5mm	Ant 0	-	DS13	4182	836.4	4	22.98	24.00	1.265	-	-	0.03	0.316	0.400		
	1st	LTE Band 5	10M	QPSK	1	0	-	Back	5mm	Ant 0	-	DS13	20525	836.5	1	22.83	24.00	1.309	-	-	-0.09	1.080	1.414	0.33	
40	2nd	LTE Band 5	10M	QPSK	1	0	-	Back	5mm	Ant 0	-	DS13	20525	836.5	4	22.87	24.00	1.297	-	-	0.09	1.000	1.297		
	2nd	LTE Band 5	10M	QPSK	1	0	-	Back	5mm	Ant 0	-	DS13	20525	836.5	5	22.87	24.00	1.297	-	-	-0.18	0.857	1.112		
	2nd	LTE Band 5	10M	QPSK	1	0	-	Back	5mm	Ant 0	-	DS13	20525	836.5	6	22.87	24.00	1.297	-	-	0.1	0.921	1.195	0.06	
	1st	LTE Band 5	10M	QPSK	1	0	-	Front	5mm	Ant 0	-	DS13	20525	836.5	1	22.83	24.00	1.309	-	-	0.11	0.510	0.668		
	2nd	LTE Band 5	10M	QPSK	1	0	-	Front	5mm	Ant 0	-	DS13	20525	836.5	4	22.87	24.00	1.297	-	-	0.03	0.503	0.652	0.92	
	2nd	LTE Band 5	10M	QPSK	1	0	-	Front	15mm	Ant 0	-	DS14	20525	836.5	4	22.87	24.00	24.00	-	-	0.01	0.166	0.215		
	2nd	LTE Band 5	10M	QPSK	1	0	-	Back	18mm	Ant 0	-	DS14	20525	836.5	4	22.87	24.00	24.00	-	-	0.07	0.192	0.249		
	1st	LTE Band 26	15M	QPSK	1	0	-	Back	5mm	Ant 0	-	DS13	26865	831.5	1	22.94	24.00	1.276	-	-	-0.03	0.734	0.937	1.09	
41	2nd	LTE Band 26	15M	QPSK	1	0	-	Back	5mm	Ant 0	-	DS13	26865	831.5	4	22.98	24.00	1.265	-	-	-0.05	0.571	0.722		
	1st	FR1 n26	20M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 0	-	DS13	166300	831.5	1	23.28	24.00	1.180	-	-	0.09	0.924	1.091	0.25	
42	2nd	FR1 n26	20M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 0	-	DS13	166300	831.5	4	23.36	24.00	1.159	-	-	0.06	0.873	1.012		
	2nd	FR1 n26	20M	QPSK	1	1	DFT-SCS-15KHz	Front	15mm	Ant 0	-	DS14	166300	831.5	4	23.36	24.00	1.159	-	-	0.01	0.172	0.199	0.92	
	2nd	FR1 n26	20M	QPSK	1	1	DFT-SCS-15KHz	Back	18mm	Ant 0	-	DS14	166300	831.5	4	23.36	24.00	1.159	-	-	0.07	0.201	0.233		
1900MHz																									
	1st	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Back	5mm	Ant 0	-	DS13	512	1850.2	1	20.13	22.00	1.538	-	-	-0.02	0.929	1.429	0.51	
43	2nd	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Back	5mm	Ant 0	-	DS13	512	1850.2	4	20.30	22.00	1.479	-	-	0.19	0.826	1.222		
	1st	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Front	5mm	Ant 0	-	DS13	661	1880	1	20.26	22.00	1.493	-	-	-0.04	0.458	0.684	0.39	
	2nd	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Front	5mm	Ant 0	-	DS13	661	1880	4	20.34	22.00	1.466	-	-	0.01	0.419	0.614		
	1st	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	-	DS13	9400	1880	1	17.04	18.50	1.400	-	-	0.01	0.814	1.139	0.02	
44	2nd	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	-	DS13	9400	1880	4	17.06	18.50	1.393	-	-	0.01	0.811	1.130		
	1st	LTE Band 25	20M	QPSK	1	0	-	Back	5mm	Ant 0	-	DS13	26140	1860	1	17.70	18.50	1.202	-	-	0.02	1.100	1.322	0.92	
45	2nd	LTE Band 2	20M	QPSK	1	0	-	Back	5mm	Ant 0	-	DS13	18700	1860	4	17.65	18.50	1.216	-	-	0.09	0.890	1.082		
2600MHz																									
	1st	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 1	-	DS13	21100	2535	1	17.83	18.50	1.167	-	-	0.06	1.080	1.260	1.85	
	2nd	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 1	-	DS13	21100	2535	4	17.93	18.50	1.140	-	-	-0.04	0.705	0.804		
	2nd	LTE Band 7C	20M	QPSK	1	99	-	Back	5mm	Ant 1	-	DS13	21100+21298	2535+2554.8	4	17.69	18.50	1.205	-	-	0.03	0.661	0.797	0.92	
	2nd	LTE Band 7_ENDC	20M	QPSK	1	0	-	Front	5mm	Ant 4	-	DS13	21100	2535	4	17.68	19.00	1.355	-	-	0.18	0.320	0.434		
	2nd	LTE Band 7_ENDC	20M	QPSK	50	0	-	Front	5mm	Ant 4	-	DS13	21100	2535	4	17.66	19.00	1.361	-	-	0.18	0.292	0.398	0.92	
	2nd	LTE Band 7_ENDC	20M	QPSK	1	0	-	Back	5mm	Ant 4	-	DS13	21100	2535	4	17.68	19.00	1.355	-	-	-0.1	0.594	0.805		
	2nd	LTE Band 7_ENDC	20M	QPSK	50	0	-	Back	5mm	Ant 4	-	DS13	21100	2535	4	17.66	19.00	1.361	-	-	-0.1	0.576	0.784	0.92	
	2nd	LTE Band 7_ENDC	20M	QPSK	100	0	-	Back	5mm	Ant 4	-	DS13	21100	2535	4	17.63	19.00	1.371	-	-	0.05	0.571	0.783		
46	2nd	LTE Band 7_ENDC	20M	QPSK	1	0	-	Back	5mm	Ant 4	-	DS13	20850	2510	4	17.52	19.00	1.406	-	-	-0.09	0.643	0.904		
	2nd	LTE Band 7_ENDC	20M	QPSK	1	0	-	Back	5mm	Ant 4	-	DS13	21350	2560	4	17.55	19.00	1.396	-	-	-0.18	0.529	0.739	0.92	
	2nd	LTE Band 7_ENDC	20M	QPSK	1	0	-	Front	15mm	Ant 4	-	DS14	21100	2535	4	21.59	23.00	1.384	-	-	-0.17	0.265	0.367		
	2nd	LTE Band 7_ENDC	20M	QPSK	1	0	-	Back	18mm	Ant 4	-	DS14	21100	2535	4	21.59	23.00	1.384	-	-	-0.08	0.373	0.516	0.92	
	2nd	LTE Band 41	20M	QPSK	1	0	-	Front	5mm	Ant 4	-	DS13	40620	2593	4	15.57	16.00	1.104	62.9	1.006	0.18	0.312	0.347		
	2nd	LTE Band 41	20M	QPSK	50	0	-	Front	5mm	Ant 4	-	DS13	40620	2593	4	15.55	16.00	1.109	62.9	1.006	0.16	0.263	0.293	0.92	
	2nd	LTE Band 41	20M	QPSK	1	0	-	Back	5mm	Ant 4	-	DS13	40620	2593	4	15.57	16.00	1.104	62.9	1.006	-0.02	0.577	0.641		
	2nd	LTE Band 41C	20M	QPSK	1	99	-	Back	5mm	Ant 4	-	DS13	40620+40818	2593+2612.8	4	15.55	16.00	1.109	62.9	1.006	0.03	0.564	0.629	0.92	
	2nd	LTE Band 41	20M	QPSK	50	0	-	Back	5mm	Ant 4	-	DS13	40620	2593	4	15.55	16.00	1.109	62.9	1.006	-0.01	0.505	0.563		
	2nd	LTE Band 41 HUPE	20M	QPSK	1	0	-	Back	5mm	Ant 4	-	DS13	40620	2593	4	17.95	19.00	1.274	42.9	1.009	-0.08	0.723	0.929	0.92	
	2nd	LTE Band 41 HUPE	20M	QPSK	1	0	-	Back	5mm	Ant 4	-	DS13	39750	2506	4	17.76	19.00	1.330	42.9	1.009	-0.08	0.668	0.897		



2nd	LTE Band 41_HUPE	20M	QPSK	1	0	-	Back	5mm	Ant 4	-	DSI3	40185	2549.5	4	17.87	19.00	1.297	42.9	1.009	0.1	0.705	0.923		
2nd	LTE Band 41_HUPE	20M	QPSK	1	0	-	Back	5mm	Ant 4	-	DSI3	41055	2636.5	4	17.75	19.00	1.334	42.9	1.009	-0.18	0.680	0.915		
2nd	LTE Band 41_HUPE	20M	QPSK	1	0	-	Back	5mm	Ant 4	-	DSI3	41490	2680	4	17.83	19.00	1.309	42.9	1.009	0.1	0.697	0.921		
2nd	LTE Band 41_HUPE	20M	QPSK	100	0	-	Back	5mm	Ant 4	-	DSI3	40620	2593	4	17.91	19.00	1.285	42.9	1.009	0.12	0.704	0.913		
2nd	LTE Band 41	20M	QPSK	1	0	-	Front	15mm	Ant 4	-	DSI4	40620	2593	4	23.49	24.00	1.125	62.9	1.006	-0.04	0.243	0.275		
2nd	LTE Band 41	20M	QPSK	1	0	-	Back	18mm	Ant 4	-	DSI4	40620	2593	4	23.49	24.00	1.125	62.9	1.006	-0.08	0.404	0.457		
2nd	LTE Band 41	20M	QPSK	50	0	-	Back	18mm	Ant 4	-	DSI4	40620	2593	4	22.54	23.00	1.112	62.9	1.006	0.17	0.390	0.436		
2nd	LTE Band 41_HUPE	20M	QPSK	1	0	-	Back	18mm	Ant 4	-	DSI4	40620	2593	4	25.87	27.00	1.297	42.9	1.009	0.18	0.452	0.592		
2nd	LTE Band 41_ENDC	20M	QPSK	1	0	-	Front	5mm	Ant 1	-	DSI3	40620	2593	4	19.58	21.00	1.387	62.9	1.006	0.12	0.429	0.598		
2nd	LTE Band 41_ENDC	20M	QPSK	50	0	-	Front	5mm	Ant 1	-	DSI3	40620	2593	4	19.56	21.00	1.393	62.9	1.006	0.08	0.423	0.593		
2nd	LTE Band 41_ENDC	20M	QPSK	1	0	-	Back	5mm	Ant 1	-	DSI3	40620	2593	4	19.58	21.00	1.387	62.9	1.006	-0.06	0.713	0.995		
2nd	LTE Band 41_ENDC	20M	QPSK	1	0	-	Back	5mm	Ant 1	-	DSI3	39750	2506	4	19.53	21.00	1.403	62.9	1.006	-0.03	0.672	0.948		
2nd	LTE Band 41_ENDC	20M	QPSK	1	0	-	Back	5mm	Ant 1	-	DSI3	40185	2549.5	4	19.49	21.00	1.416	62.9	1.006	0.14	0.675	0.961		
2nd	LTE Band 41_ENDC	20M	QPSK	1	0	-	Back	5mm	Ant 1	-	DSI3	41055	2636.5	4	19.51	21.00	1.409	62.9	1.006	0.11	0.689	0.977		
2nd	LTE Band 41_ENDC	20M	QPSK	1	0	-	Back	5mm	Ant 1	-	DSI3	41490	2680	4	19.48	21.00	1.419	62.9	1.006	-0.05	0.663	0.946		
2nd	LTE Band 41_ENDC	20M	QPSK	50	0	-	Back	5mm	Ant 1	-	DSI3	40620	2593	4	19.56	21.00	1.393	62.9	1.006	0.18	0.708	0.992		
2nd	LTE Band 41_ENDC	20M	QPSK	50	0	-	Back	5mm	Ant 1	-	DSI3	39750	2506	4	19.55	21.00	1.396	62.9	1.006	-0.17	0.668	0.938		
2nd	LTE Band 41_ENDC	20M	QPSK	50	0	-	Back	5mm	Ant 1	-	DSI3	40185	2549.5	4	19.50	21.00	1.413	62.9	1.006	0.17	0.683	0.971		
2nd	LTE Band 41_ENDC	20M	QPSK	50	0	-	Back	5mm	Ant 1	-	DSI3	41055	2636.5	4	19.43	21.00	1.435	62.9	1.006	-0.05	0.687	0.992		
2nd	LTE Band 41_ENDC	20M	QPSK	50	0	-	Back	5mm	Ant 1	-	DSI3	41490	2680	4	19.52	21.00	1.406	62.9	1.006	0.01	0.691	0.977		
2nd	LTE Band 41_ENDC	20M	QPSK	100	0	-	Back	5mm	Ant 1	-	DSI3	40620	2593	4	19.54	21.00	1.400	62.9	1.006	-0.06	0.701	0.987		
47	2nd	LTE Band 41_HUPE_ENDC	20M	QPSK	1	0	-	Back	5mm	Ant 1	-	DSI3	40620	2593	4	22.64	24.00	1.368	42.9	1.009	-0.07	0.900	1.242	
2nd	LTE Band 41_HUPE_ENDC	20M	QPSK	1	0	-	Back	5mm	Ant 1	Headset	DSI3	40620	2593	4	22.64	24.00	1.368	42.9	1.009	0.03	0.882	1.217		
2nd	LTE Band 41_ENDC	20M	QPSK	1	0	-	Front	15mm	Ant 1	-	DSI4	40620	2593	4	22.49	24.00	1.416	62.9	1.006	-0.04	0.177	0.252		
2nd	LTE Band 41_ENDC	20M	QPSK	1	0	-	Back	18mm	Ant 1	-	DSI4	40620	2593	4	22.49	24.00	1.416	62.9	1.006	-0.08	0.171	0.244		
2nd	LTE Band 41_HUPE_ENDC	20M	QPSK	1	0	-	Front	15mm	Ant 1	-	DSI4	40620	2593	4	25.55	27.00	1.396	42.9	1.009	-0.13	0.225	0.317		
1st	FR1 n7	50M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 1	-	DSI3	507000	2535	1	18.35	19.00	1.161	-	-	0.02	0.964	1.120	0.23	
48	2nd	FR1 n7	50M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 1	-	DSI3	507000	2535	4	18.45	19.00	1.135	-	-	0.03	0.915	1.039	
2nd	FR1 n41	100M	QPSK	1	137	DFT-SCS-30KHz	Front	5mm	Ant 4	-	DSI3	518598	2592.99	4	12.49	13.50	1.262	-	-	0.03	0.311	0.392		
2nd	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Front	5mm	Ant 4	-	DSI3	518598	2592.99	4	12.47	13.50	1.268	-	-	-0.08	0.308	0.390		
2nd	FR1 n41	100M	QPSK	1	137	DFT-SCS-30KHz	Back	5mm	Ant 4	-	DSI3	518598	2592.99	4	12.49	13.50	1.262	-	-	0.1	0.650	0.820		
49	2nd	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 4	-	DSI3	518598	2592.99	4	12.47	13.50	1.268	-	-	-0.04	0.748	0.948	
2nd	FR1 n41	100M	QPSK	270	0	DFT-SCS-30KHz	Back	5mm	Ant 4	-	DSI3	518598	2592.99	4	12.43	13.50	1.279	-	-	-0.18	0.632	0.809		
2nd	FR1 n41	100M	QPSK	1	137	DFT-SCS-30KHz	Front	15mm	Ant 4	-	DSI4	518598	2592.99	4	23.31	24.00	1.172	-	-	-0.13	0.211	0.247		
2nd	FR1 n41	100M	QPSK	1	137	DFT-SCS-30KHz	Back	18mm	Ant 4	-	DSI4	518598	2592.99	4	23.31	24.00	1.172	-	-	0.06	0.398	0.467		
2nd	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Back	18mm	Ant 4	-	DSI4	518598	2592.99	4	23.18	24.00	1.208	-	-	-0.03	0.366	0.442		
3500MHz																								
1st	LTE Band 42	20M	QPSK	1	0	-	Back	5mm	Ant 5	-	DSI3	42190	3460	1	17.83	18.50	1.167	62.9	1.006	0.01	0.731	0.858		
50	2nd	LTE Band 42	20M	QPSK	1	0	-	Back	5mm	Ant 5	-	DSI3	42190	3460	4	17.98	18.50	1.127	62.9	1.006	-0.09	0.720	0.816	
2nd	LTE Band 42C	20M	QPSK	1	99	-	Back	5mm	Ant 5	-	DSI3	42190+42388	3460+3479.8	4	17.91	18.50	1.146	62.9	1.006	0.03	0.702	0.809	0.07	
2nd	LTE Band 42	20M	QPSK	1	0	-	Back	5mm	Ant 5	-	DSI3	42190	3460	5	17.83	18.50	1.167	62.9	1.006	0.12	0.626	0.735		
2nd	LTE Band 42	20M	QPSK	1	0	-	Back	5mm	Ant 5	-	DSI3	42190	3460	6	17.83	18.50	1.167	62.9	1.006	0.08	0.653	0.766		
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Front	5mm	Ant 5	-	DSI3	656000	3840	4	18.38	19.50	1.294	-	-	-0.18	0.420	0.544		
2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Front	5mm	Ant 5	-	DSI3	656000	3840	4	18.35	19.50	1.303	-	-	0.1	0.404	0.526		
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Back	5mm	Ant 5	-	DSI3	656000	3840	4	18.38	19.50	1.294	-	-	0.03	0.641	0.830		
2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 5	-	DSI3	656000	3840	4	18.35	19.50	1.303	-	-	-0.17	0.592	0.771		
2nd	FR1 n77 PC2	100M	QPSK	270	0	DFT-SCS-30KHz	Back	5mm	Ant 5	-	DSI3	656000	3840	4	18.31	19.50	1.315	-	-	0.08	0.538	0.708		
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Front	15mm	Ant 5	-	DSI4	656000	3840	4	25.80	27.00	1.318	-	-	-0.03	0.321	0.423		
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Back	18mm	Ant 5	-	DSI4	656000	3840	4	25.80	27.00	1.318	-	-	0.08	0.405	0.534		
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Front	5mm	Ant 1	-	DSI3	656000	3840	4	20.48	21.00	1.127	-	-	-0.09	0.444	0.500		
2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Front	5mm	Ant 1	-	DSI3	656000	3840	4	20.46	21.00	1.132	-	-	-0.08	0.360	0.408		
51	2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Back	5mm	Ant 1	-	DSI3	656000	3840	4	20.48	21.00	1.127	-	-	-0.04	1.080	1.217	
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Back	5mm	Ant 1	Headset	DSI3	656000	3840	4	20.48	21.00	1.127	-	-	0.03	1.020	1.150		
2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 1	-	DSI3	656000	3840	4	20.46	21.00	1.132	-	-	0.12	0.893	1.011		
2nd	FR1 n77 PC2	100M	QPSK	270	0	DFT-SCS-30KHz	Back	5mm	Ant 1	-	DSI3	656000	3840	4	20.43	21.00	1.140	-	-	0.03	0.861	0.982		



FCC SAR Test Report

Report No. : FA422910

2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Front	15mm	Ant 1	-	DSI4	656000	3840	4	23.24	24.00	1.191	-	-	-0.07	0.292	0.348
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Back	18mm	Ant 1	-	DSI4	656000	3840	4	23.24	24.00	1.191	-	-	0.05	0.411	0.490
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Front	5mm	Ant 2	-	DSI3	656000	3840	4	20.26	21.00	1.186	-	-	0.18	0.110	0.130
2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Front	5mm	Ant 2	-	DSI3	656000	3840	4	20.24	21.00	1.191	-	-	-0.1	0.106	0.126
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Back	5mm	Ant 2	-	DSI3	656000	3840	4	20.26	21.00	1.186	-	-	-0.15	0.702	0.832
2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 2	-	DSI3	656000	3840	4	20.24	21.00	1.191	-	-	0.19	0.550	0.655
2nd	FR1 n77 PC2	100M	QPSK	270	0	DFT-SCS-30KHz	Back	5mm	Ant 2	-	DSI3	656000	3840	4	20.21	21.00	1.199	-	-	0.07	0.659	0.790
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Front	15mm	Ant 2	-	DSI4	656000	3840	4	23.01	24.00	1.256	-	-	-0.11	0.082	0.103
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Back	18mm	Ant 2	-	DSI4	656000	3840	4	23.01	24.00	1.256	-	-	-0.12	0.163	0.205
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Front	5mm	Ant 8	-	DSI3	656000	3840	4	17.33	18.00	1.167	-	-	0.08	0.060	0.070
2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Front	5mm	Ant 8	-	DSI3	656000	3840	4	17.31	18.00	1.172	-	-	0.01	0.086	0.101
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Back	5mm	Ant 8	-	DSI3	656000	3840	4	17.33	18.00	1.167	-	-	0.03	0.696	0.812
2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 8	-	DSI3	656000	3840	4	17.31	18.00	1.172	-	-	-0.08	0.619	0.726
2nd	FR1 n77 PC2	100M	QPSK	270	0	DFT-SCS-30KHz	Back	5mm	Ant 8	-	DSI3	656000	3840	4	17.28	18.00	1.180	-	-	0.1	0.651	0.768
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Front	15mm	Ant 8	-	DSI4	656000	3840	4	21.16	22.00	1.213	-	-	0.03	0.034	0.041
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Back	18mm	Ant 8	-	DSI4	656000	3840	4	21.16	22.00	1.213	-	-	-0.16	0.195	0.237

Plot No.	No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Deviation d _{dB} (dB)
2450MHz																			
	1st	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	Ant 6	standalone	11	2462	1	17.71	19.00	1.346	99.3	1.007	0.07	1.020	1.382	1.67
52	2nd	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	Ant 6	standalone	11	2462	4	17.78	19.00	1.324	99.3	1.007	0.08	0.695	0.927	
	2nd	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	Ant 6	standalone	11	2462	5	17.78	19.00	1.324	99.3	1.007	0.14	0.676	0.902	
	2nd	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	Ant 6	standalone	11	2462	6	17.78	19.00	1.324	99.3	1.007	0.11	0.654	0.872	
	1st	Bluetooth	1Mbps	Back	5mm	Ant 6	Full Power	39	2441	1	12.05	13.50	1.396	77.57	1.053	-0.09	0.082	0.121	0.11
53	2nd	Bluetooth	1Mbps	Back	5mm	Ant 6	Full Power	39	2441	4	12.11	13.50	1.377	77.57	1.053	0.18	0.080	0.116	
5000MHz																			
	1st	WLAN5.3GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 6	standalone	58	5290	1	13.45	15.00	1.429	94.16	1.062	-0.05	0.750	1.138	0.88
54	2nd	WLAN5.3GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 6	standalone	58	5290	4	13.45	15.00	1.429	94.16	1.062	-0.08	0.613	0.930	
	1st	WLAN5.5GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 6	standalone	122	5610	1	11.53	13.00	1.403	94.16	1.062	0.06	0.739	1.101	0.10
55	2nd	WLAN5.5GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 6	standalone	122	5610	4	11.59	13.00	1.384	94.16	1.062	-0.09	0.722	1.061	
	2nd	WLAN5.5GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 6	standalone	122	5610	5	11.59	13.00	1.384	94.16	1.062	-0.17	0.696	1.023	
	2nd	WLAN5.5GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 6	standalone	122	5610	6	11.59	13.00	1.384	94.16	1.062	-0.03	0.595	0.874	1.07
	1st	WLAN5.8GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 6	standalone	155	5775	1	14.55	16.00	1.396	94.16	1.062	0.18	0.769	1.140	
56	2nd	WLAN5.8GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 6	standalone	155	5775	4	14.59	16.00	1.384	94.16	1.062	-0.05	0.601	0.883	



16.4 Product specific 10g SAR

Plot No.	No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)	Deviation d _{AB} (dB)
835MHz																							
	1st	GSM850	-	-	-	-	GPRS (2 Tx slots)	Bottom Side	0mm	Ant 0	DS16	128	824.2	1	30.28	31.50	1.324	-	-	0.01	1.810	2.397	0.76
57	2nd	GSM850	-	-	-	-	GPRS (2 Tx slots)	Bottom Side	0mm	Ant 0	DS16	128	824.2	4	30.37	31.50	1.297	-	-	0.04	1.550	2.011	
	2nd	GSM850	-	-	-	-	GPRS (2 Tx slots)	Bottom Side	0mm	Ant 0	DS16	128	824.2	5	30.37	31.50	1.297	-	-	-0.05	1.510	1.959	
	2nd	GSM850	-	-	-	-	GPRS (2 Tx slots)	Bottom Side	0mm	Ant 0	DS16	128	824.2	6	30.37	31.50	1.297	-	-	0.18	1.460	1.894	
	1st	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	0mm	Ant 0	DS16	4182	836.4	1	22.88	24.00	1.294	-	-	0.03	0.898	1.162	0.11
73	2nd	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	0mm	Ant 0	DS16	4182	836.4	4	22.98	24.00	1.265	-	-	0.08	0.895	1.132	
	1st	LTE Band 5	10M	QPSK	1	0	-	Back	0mm	Ant 0	DS16	20525	836.5	1	22.83	24.00	1.309	-	-	0.01	0.996	1.304	0.05
58	2nd	LTE Band 5	10M	QPSK	1	0	-	Back	0mm	Ant 0	DS16	20525	836.5	4	22.87	24.00	1.297	-	-	0.04	0.993	1.288	
1900MHz																							
	1st	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Bottom Side	0mm	Ant 0	DS16	512	1850.2	1	22.21	24.00	1.510	-	-	0.03	2.360	3.564	0.47
59	2nd	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Bottom Side	0mm	Ant 0	DS16	512	1850.2	4	22.37	24.00	1.455	-	-	0.05	2.200	3.202	
	1st	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Back	0mm	Ant 0	DS16	661	1880	1	22.33	24.00	1.469	-	-	0.01	1.280	1.880	0.58
	2nd	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Back	0mm	Ant 0	DS16	661	1880	4	22.41	24.00	1.442	-	-	0.03	1.140	1.644	
	1st	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	0mm	Ant 0	DS16	9262	1852.4	1	18.53	20.00	1.403	-	-	0.06	2.510	3.521	0.09
60	2nd	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	0mm	Ant 0	DS16	9262	1852.4	4	18.55	20.00	1.396	-	-	0.04	2.470	3.449	
	2nd	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	0mm	Ant 0	DS16	9262	1852.4	5	18.55	20.00	1.396	-	-	0.17	2.030	2.835	
	2nd	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	0mm	Ant 0	DS16	9262	1852.4	6	18.55	20.00	1.396	-	-	-0.05	2.170	3.030	
	1st	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	0mm	Ant 0	DS16	9400	1880	1	18.63	20.00	1.371	-	-	-0.15	1.560	2.139	0.46
	2nd	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	0mm	Ant 0	DS16	9400	1880	4	18.59	20.00	1.384	-	-	0.09	1.390	1.923	
	1st	LTE Band 25	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 0	DS16	26140	1860	1	18.63	20.00	1.371	-	-	0.09	2.590	3.551	1.00
61	2nd	LTE Band 2	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 0	DS16	18700	1860	4	18.90	20.00	1.288	-	-	0.01	2.190	2.821	
2600MHz																							
	1st	LTE Band 7	20M	QPSK	1	0	-	Back	0mm	Ant 1	DS16	21100	2535	1	20.25	21.00	1.189	-	-	-0.09	2.120	2.520	0.63
	2nd	LTE Band 7	20M	QPSK	1	0	-	Back	0mm	Ant 1	DS16	21100	2535	4	20.31	21.00	1.172	-	-	-0.02	1.860	2.180	
	2nd	LTE Band 7C	20M	QPSK	1	99	-	Back	0mm	Ant 1	DS16	21100+21298	2535+2554.8	4	20.18	21.00	1.208	-	-	0.09	1.770	2.138	
62	2nd	LTE Band 7_ENDC	20M	QPSK	1	0	-	Back	0mm	Ant 4	DS16	21100	2535	4	19.67	21.00	1.358	-	-	0.04	1.750	2.377	
	2nd	LTE Band 7_ENDC	20M	QPSK	1	0	-	Back	0mm	Ant 4	DS16	20850	2510	4	19.61	21.00	1.377	-	-	-0.03	1.530	2.107	
	2nd	LTE Band 7_ENDC	20M	QPSK	1	0	-	Back	0mm	Ant 4	DS16	21350	2560	4	19.64	21.00	1.368	-	-	0.14	1.620	2.216	
	2nd	LTE Band 7_ENDC	20M	QPSK	50	0	-	Back	0mm	Ant 4	DS16	21100	2535	4	19.62	21.00	1.374	-	-	0.02	1.610	2.212	
	2nd	LTE Band 7_ENDC	20M	QPSK	50	0	-	Back	0mm	Ant 4	DS16	20850	2510	4	19.60	21.00	1.380	-	-	0.08	1.520	2.098	
	2nd	LTE Band 7_ENDC	20M	QPSK	50	0	-	Back	0mm	Ant 4	DS16	21350	2560	4	19.59	21.00	1.384	-	-	-0.17	1.480	2.048	
	2nd	LTE Band 7_ENDC	20M	QPSK	100	0	-	Back	0mm	Ant 4	DS16	21100	2535	4	19.59	21.00	1.384	-	-	0.02	1.550	2.145	
	2nd	LTE Band 7_ENDC	20M	QPSK	1	0	-	Back	8mm	Ant 4	DS14	21100	2535	4	21.59	23.00	1.384	-	-	0.06	0.713	0.986	
	2nd	LTE Band 41	20M	QPSK	1	0	DFT-SCS-30KHz	Back	0mm	Ant 4	DS16	40620	2593	4	20.06	20.50	1.107	62.9	1.006	0.14	1.730	1.926	
	2nd	LTE Band 41	20M	QPSK	1	0	DFT-SCS-30KHz	Back	0mm	Ant 4	DS16	39750	2506	4	19.94	20.50	1.138	62.9	1.006	-0.01	1.890	2.163	
	2nd	LTE Band 41C	20M	QPSK	1	99	DFT-SCS-30KHz	Back	0mm	Ant 4	DS16	39750+39948	2506+2525.8	4	19.92	20.50	1.143	62.9	1.006	-0.08	1.730	1.989	
	2nd	LTE Band 41	20M	QPSK	1	0	DFT-SCS-30KHz	Back	0mm	Ant 4	DS16	40185	2549.5	4	20.03	20.50	1.114	62.9	1.006	-0.17	1.720	1.928	
	2nd	LTE Band 41	20M	QPSK	1	0	DFT-SCS-30KHz	Back	0mm	Ant 4	DS16	41055	2636.5	4	20.04	20.50	1.112	62.9	1.006	0.17	1.530	1.711	
	2nd	LTE Band 41	20M	QPSK	1	0	DFT-SCS-30KHz	Back	0mm	Ant 4	DS16	41490	2680	4	19.93	20.50	1.140	62.9	1.006	-0.05	1.620	1.858	
	2nd	LTE Band 41	20M	QPSK	50	0	DFT-SCS-30KHz	Back	0mm	Ant 4	DS16	40620	2593	4	20.04	20.50	1.112	62.9	1.006	0.01	1.480	1.655	
	2nd	LTE Band 41	20M	QPSK	50	0	DFT-SCS-30KHz	Back	0mm	Ant 4	DS16	39750	2506	4	19.92	20.50	1.143	62.9	1.006	0.1	1.450	1.667	
	2nd	LTE Band 41	20M	QPSK	50	0	DFT-SCS-30KHz	Back	0mm	Ant 4	DS16	40185	2549.5	4	19.99	20.50	1.125	62.9	1.006	-0.17	1.390	1.573	
	2nd	LTE Band 41	20M	QPSK	50	0	DFT-SCS-30KHz	Back	0mm	Ant 4	DS16	41055	2636.5	4	19.96	20.50	1.132	62.9	1.006	0.04	0.997	1.136	
	2nd	LTE Band 41	20M	QPSK	50	0	DFT-SCS-30KHz	Back	0mm	Ant 4	DS16	41490	2680	4	19.88	20.50	1.153	62.9	1.006	-0.01	0.566	0.657	
	2nd	LTE Band 41	20M	QPSK	100	0	DFT-SCS-30KHz	Back	0mm	Ant 4	DS16	40620	2593	4	20.01	20.50	1.119	62.9	1.006	-0.08	1.400	1.577	
	2nd	LTE Band 41	20M	QPSK	1	0	DFT-SCS-30KHz	Top Side	0mm	Ant 4	DS16	40620	2593	4	20.06	20.50	1.107	62.9	1.006	0.05	1.560	1.737	
	2nd	LTE Band 41	20M	QPSK	1	0	DFT-SCS-30KHz	Top Side	0mm	Ant 4	DS16	39750	2506	4	19.94	20.50	1.138	62.9	1.006	0.06	1.520	1.740	
	2nd	LTE Band 41	20M	QPSK	1	0	DFT-SCS-30KHz	Top Side	0mm	Ant 4	DS16	40185	2549.5	4	20.03	20.50	1.114	62.9	1.006	-0.09	1.460	1.637	
	2nd	LTE Band 41	20M	QPSK	1	0	DFT-SCS-30KHz	Top Side	0mm	Ant 4	DS16	41055	2636.5	4	20.04	20.50	1.112	62.9	1.006	-0.08	1.050	1.174	



	2nd	LTE Band 41	20M	QPSK	1	0	DFT-SCS-30KHz	Top Side	0mm	Ant 4	DSi6	41490	2680	4	19.93	20.50	1.140	62.9	1.006	0.13	0.595	0.683	
	2nd	LTE Band 41	20M	QPSK	50	0	DFT-SCS-30KHz	Top Side	0mm	Ant 4	DSi6	40620	2593	4	20.04	20.50	1.112	62.9	1.006	0.12	1.330	1.487	
	2nd	LTE Band 41	20M	QPSK	100	0	DFT-SCS-30KHz	Top Side	0mm	Ant 4	DSi6	40620	2593	4	20.01	20.50	1.119	62.9	1.006	0.07	1.220	1.374	
63	2nd	LTE Band 41 HUPE	20M	QPSK	1	0	DFT-SCS-30KHz	Back	0mm	Ant 4	DSi6	39750	2506	4	22.32	23.50	1.312	42.9	1.009	-0.03	2.360	3.125	
	2nd	LTE Band 41 HUPE	20M	QPSK	1	0	DFT-SCS-30KHz	Back	0mm	Ant 4	DSi6	39750	2506	5	22.32	23.50	1.312	42.9	1.009	0.01	2.310	3.058	
	2nd	LTE Band 41 HUPE	20M	QPSK	1	0	DFT-SCS-30KHz	Back	0mm	Ant 4	DSi6	39750	2506	6	22.32	23.50	1.312	42.9	1.009	0.1	2.330	3.085	
	2nd	LTE Band 41	20M	QPSK	1	0	DFT-SCS-30KHz	Back	8mm	Ant 4	DSi4	40620	2593	4	23.49	24.00	1.125	62.9	1.006	-0.02	0.781	0.884	
	2nd	LTE Band 41	20M	QPSK	1	0	DFT-SCS-30KHz	Top Side	10mm	Ant 4	DSi4	40620	2593	4	23.49	24.00	1.125	62.9	1.006	0.15	0.463	0.524	
	2nd	LTE Band 41 HUPE	20M	QPSK	1	0	DFT-SCS-30KHz	Back	8mm	Ant 4	DSi4	40620	2593	4	25.87	27.00	1.297	42.9	1.009	-0.09	0.998	1.306	
	2nd	LTE Band 41_ENDC	20M	QPSK	1	0	DFT-SCS-30KHz	Back	0mm	Ant 1	DSi6	40620	2593	4	21.05	22.50	1.396	62.9	1.006	0.07	1.240	1.742	
	2nd	LTE Band 41_ENDC	20M	QPSK	1	0	DFT-SCS-30KHz	Back	0mm	Ant 1	DSi6	40620	2593	4	20.92	22.50	1.439	62.9	1.006	0.12	1.060	1.534	
	2nd	LTE Band 41_ENDC	20M	QPSK	1	0	DFT-SCS-30KHz	Back	0mm	Ant 1	DSi6	40620	2593	4	21.03	22.50	1.403	62.9	1.006	0.08	0.985	1.390	
	2nd	LTE Band 41_ENDC	20M	QPSK	1	0	DFT-SCS-30KHz	Back	0mm	Ant 1	DSi6	40620	2593	4	20.99	22.50	1.416	62.9	1.006	-0.17	1.130	1.609	
	2nd	LTE Band 41_ENDC	20M	QPSK	1	0	DFT-SCS-30KHz	Back	0mm	Ant 1	DSi6	40620	2593	4	21.02	22.50	1.406	62.9	1.006	-0.03	1.090	1.542	
	2nd	LTE Band 41_ENDC	20M	QPSK	50	0	DFT-SCS-30KHz	Back	0mm	Ant 1	DSi6	40620	2593	4	21.03	22.50	1.403	62.9	1.006	0.05	1.220	1.722	
	2nd	LTE Band 41_ENDC	20M	QPSK	50	0	DFT-SCS-30KHz	Back	0mm	Ant 1	DSi6	40620	2593	4	20.80	22.50	1.479	62.9	1.006	0.14	1.020	1.518	
	2nd	LTE Band 41_ENDC	20M	QPSK	50	0	DFT-SCS-30KHz	Back	0mm	Ant 1	DSi6	40620	2593	4	20.77	22.50	1.489	62.9	1.006	0.11	0.991	1.485	
	2nd	LTE Band 41_ENDC	20M	QPSK	50	0	DFT-SCS-30KHz	Back	0mm	Ant 1	DSi6	40620	2593	4	20.93	22.50	1.435	62.9	1.006	-0.05	0.987	1.425	
	2nd	LTE Band 41_ENDC	20M	QPSK	50	0	DFT-SCS-30KHz	Back	0mm	Ant 1	DSi6	40620	2593	4	20.98	22.50	1.419	62.9	1.006	0.18	1.110	1.585	
	2nd	LTE Band 41_ENDC	20M	QPSK	100	0	DFT-SCS-30KHz	Back	0mm	Ant 1	DSi6	40620	2593	4	21.05	22.50	1.396	62.9	1.006	0.07	1.040	1.461	
	2nd	LTE Band 41 HUPE_ENDC	20M	QPSK	1	0	DFT-SCS-30KHz	Back	0mm	Ant 1	DSi6	40620	2593	4	24.13	25.50	1.371	42.9	1.009	0.02	1.580	2.185	
	2nd	LTE Band 41_ENDC	20M	QPSK	1	0	DFT-SCS-30KHz	Back	11mm	Ant 1	DSi4	40620	2593	4	22.49	24.00	1.416	62.9	1.006	0.11	0.291	0.414	
	2nd	LTE Band 41 HUPE_ENDC	20M	QPSK	1	0	DFT-SCS-30KHz	Back	11mm	Ant 1	DSi4	40620	2593	4	25.55	27.00	1.396	42.9	1.009	-0.05	0.371	0.523	
	1st	FR1 n7	50M	QPSK	1	1	DFT-SCS-15KHz	Back	0mm	Ant 1	DSi6	507000	2535	1	20.35	21.00	1.161	-	-	0.01	2.770	3.217	0.81
64	2nd	FR1 n7	50M	QPSK	1	1	DFT-SCS-15KHz	Back	0mm	Ant 1	DSi6	507000	2535	4	20.37	21.00	1.156	-	-	0.09	2.310	2.671	
65	2nd	FR1 n41	100M	QPSK	1	137	DFT-SCS-30KHz	Back	0mm	Ant 4	DSi6	518598	2592.99	4	17.99	19.00	1.262	-	-	0.02	2.120	2.675	
	2nd	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Back	0mm	Ant 4	DSi6	518598	2592.99	4	17.96	19.00	1.271	-	-	0.19	2.060	2.617	
	2nd	FR1 n41	100M	QPSK	270	0	DFT-SCS-30KHz	Back	0mm	Ant 4	DSi6	518598	2592.99	4	17.91	19.00	1.285	-	-	0.07	2.050	2.635	
	2nd	FR1 n41	100M	QPSK	1	137	DFT-SCS-30KHz	Top Side	0mm	Ant 4	DSi6	518598	2592.99	4	17.99	19.00	1.262	-	-	-0.15	2.020	2.549	
	2nd	FR1 n41	100M	QPSK	135	69	DFT-SCS-30KHz	Top Side	0mm	Ant 4	DSi6	518598	2592.99	4	17.96	19.00	1.271	-	-	0.11	1.980	2.516	
	2nd	FR1 n41	100M	QPSK	270	0	DFT-SCS-30KHz	Top Side	0mm	Ant 4	DSi6	518598	2592.99	4	17.91	19.00	1.285	-	-	-0.08	1.810	2.326	
	2nd	FR1 n41	100M	QPSK	1	137	DFT-SCS-30KHz	Back	8mm	Ant 4	DSi4	518598	2592.99	4	23.31	24.00	1.172	-	-	-0.08	0.723	0.847	
	2nd	FR1 n41	100M	QPSK	1	137	DFT-SCS-30KHz	Top Side	10mm	Ant 4	DSi4	518598	2592.99	4	23.31	24.00	1.172	-	-	0.16	0.301	0.353	
3500MHz																							
	1st	LTE Band 42	20M	QPSK	1	0	-	Top Side	0mm	Ant 5	DSi6	42190	3460	1	22.31	23.00	1.172	62.9	1.006	0.07	2.320	2.736	
66	2nd	LTE Band 42	20M	QPSK	1	0	-	Top Side	0mm	Ant 5	DSi6	42190	3460	4	22.77	23.00	1.054	62.9	1.006	0.05	1.740	1.846	1.71
	2nd	LTE Band 42C	20M	QPSK	1	99	-	Top Side	0mm	Ant 5	DSi6	42190+42388	3460+3479.8	4	22.71	23.00	1.069	62.9	1.006	0.09	1.630	1.753	
	2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Back	0mm	Ant 5	DSi6	656000	3840	4	19.88	21.00	1.294	-	-	-0.08	0.636	0.823	
	2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Back	0mm	Ant 5	DSi6	656000	3840	4	19.86	21.00	1.300	-	-	-0.08	0.575	0.748	
	2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Top Side	0mm	Ant 5	DSi6	656000	3840	4	19.88	21.00	1.294	-	-	-0.18	1.950	2.524	
	2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Top Side	0mm	Ant 5	DSi6	656000	3840	4	19.86	21.00	1.300	-	-	0.1	1.760	2.288	
	2nd	FR1 n77 PC2	100M	QPSK	270	0	DFT-SCS-30KHz	Top Side	0mm	Ant 5	DSi6	656000	3840	4	19.83	21.00	1.309	-	-	0.12	1.930	2.527	
	2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Back	9mm	Ant 5	DSi4	656000	3840	4	25.80	27.00	1.318	-	-	0.05	0.471	0.621	
	2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Top Side	9mm	Ant 5	DSi4	656000	3840	4	25.80	27.00	1.318	-	-	0.05	0.561	0.740	
67	2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Back	0mm	Ant 1	DSi6	656000	3840	4	21.49	22.00	1.125	-	-	-0.03	2.510	2.823	
	2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Back	0mm	Ant 1	DSi6	656000	3840	5	21.49	22.00	1.125	-	-	0.03	2.210	2.485	
	2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Back	0mm	Ant 1	DSi6	656000	3840	6	21.49	22.00	1.125	-	-	0.18	2.340	2.632	
	2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Back	0mm	Ant 1	DSi6	656000	3840	4	21.47	22.00	1.130	-	-	0.03	2.240	2.531	
	2nd	FR1 n77 PC2	100M	QPSK	270	0	DFT-SCS-30KHz	Back	0mm	Ant 1	DSi6	656000	3840	4	21.44	22.00	1.138	-	-	-0.16	2.240	2.548	
	2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Back	11mm	Ant 1	DSi4	656000	3840	4	23.40	24.00	1.148	-	-	0.01	0.577	0.662	
	2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Back	0mm	Ant 8	DSi6	656000	3840	4	21.23	22.00	1.194	-	-	0.08	1.150	1.373	
	2nd	FR1 n77 PC2	100M	QPSK	135	69	DFT-SCS-30KHz	Back	0mm	Ant 8	DSi6	656000	3840	4	20.69	22.00	1.352	-	-	0.01	1.290	1.744	



Plot No.	No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)	Deviation d _{dB} (dB)
2450MHz																			
	1st	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 6	Full Power	11	2462	1	18.66	20.00	1.361	99.3	1.007	0.08	0.827	1.134	0.15
68	2nd	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 6	Full Power	11	2462	4	18.71	20.00	1.346	99.3	1.007	0.08	0.808	1.095	
	2nd	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 6	Full Power	11	2462	5	18.71	20.00	1.346	99.3	1.007	-0.01	0.697	0.945	
	2nd	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 6	Full Power	11	2462	6	18.71	20.00	1.346	99.3	1.007	-0.08	0.737	0.999	
5000MHz																			
	1st	WLAN5.2GHz	802.11a 6Mbps	Top Side	0mm	Ant 6	standalone	40	5200	1	16.45	18.00	1.429	95.44	1.048	0.06	1.850	2.770	0.18
69	2nd	WLAN5.2GHz	802.11a 6Mbps	Top Side	0mm	Ant 6	standalone	40	5200	4	16.49	18.00	1.416	95.44	1.048	-0.07	1.790	2.656	
	1st	WLAN5.3GHz	802.11a 6Mbps	Top Side	0mm	Ant 6	standalone	52	5260	1	16.25	18.00	1.496	95.44	1.048	0.1	1.910	2.995	0.33
70	2nd	WLAN5.3GHz	802.11a 6Mbps	Top Side	0mm	Ant 6	standalone	52	5260	4	16.27	18.00	1.489	95.44	1.048	-0.02	1.780	2.778	
	2nd	WLAN5.3GHz	802.11a 6Mbps	Top Side	0mm	Ant 6	standalone	52	5260	5	16.27	18.00	1.489	95.44	1.048	0.05	1.720	2.685	
	2nd	WLAN5.3GHz	802.11a 6Mbps	Top Side	0mm	Ant 6	standalone	52	5260	6	16.27	18.00	1.489	95.44	1.048	0.06	1.540	2.404	
	1st	WLAN5.5GHz	802.11a 6Mbps	Top Side	0mm	Ant 6	Full Power	132	5660	1	18.55	20.00	1.396	95.44	1.048	0.07	1.480	2.164	0.30
71	2nd	WLAN5.5GHz	802.11a 6Mbps	Top Side	0mm	Ant 6	Full Power	132	5660	4	18.61	20.00	1.377	95.44	1.048	-0.05	1.400	2.021	
	2nd	WLAN5.5GHz	802.11a 6Mbps	Top Side	0mm	Ant 6	Full Power	132	5660	5	18.61	20.00	1.377	95.44	1.048	0.13	1.380	1.992	
	2nd	WLAN5.5GHz	802.11a 6Mbps	Top Side	0mm	Ant 6	Full Power	132	5660	6	18.61	20.00	1.377	95.44	1.048	0.12	1.320	1.905	
	1st	WLAN5.8GHz	802.11a 6Mbps	Top Side	0mm	Ant 6	Full Power	165	5825	1	18.48	20.00	1.418	95.44	1.048	-0.08	1.350	2.006	0.46
72	2nd	WLAN5.8GHz	802.11a 6Mbps	Top Side	0mm	Ant 6	Full Power	165	5825	4	18.50	20.00	1.413	95.44	1.048	0.01	1.220	1.806	
	2nd	WLAN5.8GHz	802.11a 6Mbps	Top Side	0mm	Ant 6	Full Power	165	5825	5	18.50	20.00	1.413	95.44	1.048	-0.09	1.050	1.554	
	2nd	WLAN5.8GHz	802.11a 6Mbps	Top Side	0mm	Ant 6	Full Power	165	5825	6	18.50	20.00	1.413	95.44	1.048	-0.08	1.140	1.688	

16.5 Repeated SAR Measurement

<1g>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	LTE Band 5	10M	QPSK	1	0	-	Back	5mm	Ant 0	DSI7	20525	836.5	22.87	24.00	1.297	0.09	1.000	1	1.297
2nd	LTE Band 5	10M	QPSK	1	0	-	Back	5mm	Ant 0	DSI7	20525	836.5	22.87	24.00	1.297	-0.03	0.991	1.009	1.286
1st	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	5mm	Ant 0	DSI7	9400	1880	15.85	17.00	1.303	0.09	0.991	1	1.291
2nd	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	5mm	Ant 0	DSI7	9400	1880	15.85	17.00	1.303	0.03	0.979	1.012	1.276
1st	FR1 n7	50M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 1	DSI7	507000	2535	17.99	19.00	1.262	0.03	0.915	1	1.155
2nd	FR1 n7	50M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 1	DSI7	507000	2535	17.99	19.00	1.262	0.01	0.903	1.013	1.139
1st	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Back	5mm	Ant 1	DSI7	656000	3840	19.48	20.00	1.127	-0.04	1.080	1	1.217
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Back	5mm	Ant 1	DSI7	656000	3840	19.48	20.00	1.127	0.06	1.010	1.069	1.138

<10g>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Ratio	Reported 10g SAR (W/kg)
1st	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	0mm	Ant 0	DSI6	9262	1852.4	18.55	20.00	1.396	-	-	0.04	2.470	1	3.449
2nd	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	0mm	Ant 0	DSI6	9262	1852.4	18.55	20.00	1.396	-	-	0.03	2.380	1.038	3.323
1st	LTE Band 41 HUPe	20M	QPSK	1	0	DFT-SCS-30KHz	Back	0mm	Ant 4	DSI6	39750	2506	22.32	23.50	1.312	42.9	1.009	-0.03	2.360	1	3.125
2nd	LTE Band 41 HUPe	20M	QPSK	1	0	DFT-SCS-30KHz	Back	0mm	Ant 4	DSI6	39750	2506	22.32	23.50	1.312	42.9	1.009	0.03	2.240	1.054	2.966
1st	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Back	0mm	Ant 1	DSI6	656000	3840	21.49	22.00	1.125	-	-	-0.03	2.510	1	2.823
2nd	FR1 n77 PC2	100M	QPSK	1	137	DFT-SCS-30KHz	Back	0mm	Ant 1	DSI6	656000	3840	21.49	22.00	1.125	-	-	0.06	2.430	1.033	2.733

General Note:

- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8W/kg$.
- Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45W/kg$, only one repeated measurement is required.
- Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
- The ratio is the difference in percentage between original and repeated *measured SAR*.
- All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

16.6 TDD LTE Linearity Data Analysis

General Note:

This device support Power Class 2 and Power Class 3 operations for LTE Band 41. The highest available duty cycle for Power Class 2 operation is 43.3% using UL-DL configuration 1. Per FCC Guidance based on the device behavior, all SAR tests were performed using Power Class 3. Power Class 2 is tested using the highest SAR test configuration in Power Class 3 for each LTE configuration and exposure condition combination, according to the highest time averaged power for all applicable uplink-downlink configurations in Power Class 2. When the reported SAR vs. output power is linearly scaled with < 10% discrepancy between power classes and all reported SAR are < 1.4 W/kg for 1g and < 3.5 W/kg for 10g, Separate SAR testing for Power Class 2 is not required.

LTE B41-Linearity Data for Head Ant 4			LTE B41-Linearity Data for Head Ant 1		
	LTE B41 (Power Class 3)	LTE B41 (Power Class 2)		LTE B41 (Power Class 3)	LTE B41 (Power Class 2)
Maximum Tune up Power (dBm)	16.50	19.50	Maximum Tune up Power (dBm)	24.00	27.00
Reported 1g SAR (W/kg)	0.598	0.889	Reported 1g SAR (W/kg)	0.117	0.148
Duty Cycle	63.30%	43.30%	Duty Cycle	63.30%	43.30%
Frame Averaged (mW)	28.28	38.59	Frame Averaged (mW)	159.00	217.01
Linearity SAR (W/kg)	0.816		Linearity SAR (W/kg)	0.160	
% deviation from expected linearity		8.92%	% deviation from expected linearity		-7.32%
LTE B41-Linearity Data for Body-worn Ant 4			LTE B41-Linearity Data for Body-worn Ant 1		
	LTE B41 (Power Class 3)	LTE B41 (Power Class 2)		LTE B41 (Power Class 3)	LTE B41 (Power Class 2)
Maximum Tune up Power (dBm)	16.00	19.00	Maximum Tune up Power (dBm)	21.00	24.00
Reported 1g SAR (W/kg)	0.641	0.929	Reported 1g SAR (W/kg)	0.995	1.242
Duty Cycle	63.30%	43.30%	Duty Cycle	63.30%	43.30%
Frame Averaged (mW)	25.20	34.39	Frame Averaged (mW)	79.69	108.76
Linearity SAR (W/kg)	0.875		Linearity SAR (W/kg)	1.358	
% deviation from expected linearity		6.19%	% deviation from expected linearity		-8.54%
LTE B41-Linearity Data for Hotspot Ant 4			LTE B41-Linearity Data for Hotspot Ant 1		
	LTE B41 (Power Class 3)	LTE B41 (Power Class 2)		LTE B41 (Power Class 3)	LTE B41 (Power Class 2)
Maximum Tune up Power (dBm)	14.00	17.00	Maximum Tune up Power (dBm)	21.00	24.00
Reported 1g SAR (W/kg)	0.512	0.633	Reported 1g SAR (W/kg)	0.995	1.242
Duty Cycle	63.30%	43.30%	Duty Cycle	63.30%	43.30%
Frame Averaged (mW)	15.90	21.70	Frame Averaged (mW)	79.69	108.76
Linearity SAR (W/kg)	0.699		Linearity SAR (W/kg)	1.358	
% deviation from expected linearity		-9.42%	% deviation from expected linearity		-8.54%
LTE B41-Linearity Data for Extremity Ant 4			LTE B41-Linearity Data for Extremity Ant 1		
	LTE B41 (Power Class 3)	LTE B41 (Power Class 2)		LTE B41 (Power Class 3)	LTE B41 (Power Class 2)
Maximum Tune up Power (dBm)	20.50	23.50	Maximum Tune up Power (dBm)	22.50	25.50
Reported 10g SAR (W/kg)	2.163	3.125	Reported 10g SAR (W/kg)	1.742	2.185
Duty Cycle	63.30%	43.30%	Duty Cycle	63.30%	43.30%
Frame Averaged (mW)	71.02	96.94	Frame Averaged (mW)	112.57	153.63
Linearity SAR (W/kg)	2.952		Linearity SAR (W/kg)	2.378	
% deviation from expected linearity		5.85%	% deviation from expected linearity		-8.10%



Sensor off

LTE B41-Linearity Data for Body-worn Ant 4			LTE B41-Linearity Data for Body-worn Ant 1		
	LTE B41 (Power Class 3)	LTE B41 (Power Class 2)		LTE B41 (Power Class 3)	LTE B41 (Power Class 2)
Maximum Tune up Power (dBm)	24.00	27.00	Maximum Tune up Power (dBm)	24.00	27.00
Reported 1g SAR (W/kg)	0.457	0.592	Reported 1g SAR (W/kg)	0.252	0.317
Duty Cycle	63.30%	43.30%	Duty Cycle	63.30%	43.30%
Frame Averaged (mW)	159.00	217.01	Frame Averaged (mW)	159.00	217.01
Linearity SAR (W/kg)	0.624		Linearity SAR (W/kg)	0.344	
% deviation from expected linearity		-5.09%	% deviation from expected linearity		-7.83%
LTE B41-Linearity Data for Extremity Ant 4			LTE B41-Linearity Data for Extremity Ant 1		
	LTE B41 (Power Class 3)	LTE B41 (Power Class 2)		LTE B41 (Power Class 3)	LTE B41 (Power Class 2)
Maximum Tune up Power (dBm)	24.00	27.00	Maximum Tune up Power (dBm)	24.00	27.00
Reported 10g SAR (W/kg)	0.884	1.306	Reported 10g SAR (W/kg)	0.414	0.523
Duty Cycle	63.30%	43.30%	Duty Cycle	63.30%	43.30%
Frame Averaged (mW)	159.00	217.01	Frame Averaged (mW)	159.00	217.01
Linearity SAR (W/kg)	1.207		Linearity SAR (W/kg)	0.565	
% deviation from expected linearity		8.24%	% deviation from expected linearity		-7.44%

17. Simultaneous Transmission Analysis

No.	Simultaneous Transmission Configurations	Portable Handset			
		Head	Body-worn	Hotspot	Product specific 10g SAR
1.	WWAN + WLAN2.4GHz	Yes	Yes	Yes	Yes
2.	WWAN + WLAN5GHz	Yes	Yes	Yes	Yes
3.	WWAN + Bluetooth	Yes	Yes	Yes	Yes
4.	WLAN5GHz+ Bluetooth	Yes	Yes	Yes	Yes
5.	WWAN + WLAN5GHz+ Bluetooth	Yes	Yes	Yes	Yes
6.	WWAN + WLAN2.4GHz+ NFC				Yes
7.	WWAN + WLAN5GHz+ NFC				Yes
8.	WWAN + Bluetooth+ NFC				Yes
9.	WLAN5GHz+ Bluetooth+ NFC				Yes
10.	WWAN + WLAN5GHz+ Bluetooth+ NFC				Yes

General Note:

- This device supports VoIP in GPRS, EGPRS, WCDMA, LTE and 5GNR (e.g. for 3rd-party VoIP), LTE supports VoLTE operation.
- WWAN above includes 5G NR bands and EN-DC combination.
- EUT will choose each GSM, WCDMA, LTE and 5GNR according to the network signal condition; therefore, they will not operate simultaneously at any moment.
- For 5GNR EN-DC mode, standalone SAR performed for 5GNR NSA band with the maximum power, EN-DC SAR summed EN-DC mode 5GNR standalone SAR and LTE standalone SAR, the result of EN-DC SAR is more conservatively.
- This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications.
- This device 5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WLAN Direct (GC/GO), and 5.3GHz / 5.5GHz supports WLAN Direct (GC only). WLAN6GHz has no hotspot function.
- The worst case 5 GHz WLAN SAR for each configuration was used for SAR summation.
- According to the EUT characteristic, WLAN 5GHz and Bluetooth can transmit simultaneously.
- According to the EUT characteristic, WLAN 5GHz and WLAN 2.4GHz can't transmit simultaneously.
- According to the EUT characteristic, WLAN 2.4GHz and Bluetooth cannot transmit simultaneously.
- NFC can transmit simultaneously with other Radios in extremity exposure condition.
- For Headset SAR and non-Headset SAR always chose higher SAR to do co-located analysis.
- For simultaneously analysis, since the SAR summation of 3 transmitters can cover others combination of 2 transmitters, therefore in this section did not additional to evaluate 2TX combination of simultaneously transmission.
- For standalone WWAN, always choose the highest SAR among the selected WWAN band within the selected antenna to perform simultaneous transmission analysis with WLAN/BT. This is the worst co-located analysis and can represent each band.
- For EN-DC SAR co-located with WLAN/Bluetooth, chose the worst SAR among the selected LTE bands within the selected antenna per each test position and also the worst SAR of the selected 5GNR Bands within the selected antenna to do co-located with WLAN/Bluetooth. This is the worst co-located analysis and can represent each LTE bands and each 5GNR band.
- The maximum SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - 1g Scalar SAR summation < 1.6W/kg and 10g Scalar SAR summation < 4.0W/kg.
 - $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - If $SPLSR \leq 0.04$ for 1g SAR and $SPLSR \leq 0.10$ for 10g SAR, simultaneously transmission SAR measurement is not necessary.
 - Simultaneously transmission SAR measurement, and the reported multi-band 1g SAR < 1.6W/kg and 10g SAR < 4.0W/kg.
 - The SPLSR calculated results please refer to section 17.5.



Conclusion:

1. The Spot check results from chapter 17.1 to 17.4, showed that Deviation of the SAR results did not exceed 3dB, SAR data reuse is justified.
2. For the verified maximum SAR from chapter 17.1 to 17.4, when the SAR test results were less than reference model SAR results (Sporton SAR report no.: FA422904), there is no need to consider co-located SAR for reference model report had been performed conservatively. For the SAR results were higher than reference model SAR results and full tested bands, they were evaluated to do simultaneous transmission analysis with WLAN/BT. WLAN/BT SAR Chose higher SAR between reference model SAR results and variant model SAR results for each exposure position to perform co-located SAR analysis.

17.1 Head Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	1+2	1+3+4
		WWAN	WLAN2.4GHz Ant 6	WLAN5GHz Ant 6	Bluetooth Ant 6	Summed	Summed
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
LTE Band 7 Ant 4	Right Cheek	1.007	0.159	0.302	0.093	1.17	1.40
	Right Tilted	1.120	0.168	0.288	0.091	1.29	1.50
	Left Cheek	0.298	0.325	0.300	0.264	0.62	0.86
	Left Tilted	0.368	0.258	0.400	0.195	0.63	0.96
LTE Band 41 Ant 4	Right Cheek	0.333	0.159	0.302	0.093	0.49	0.73
	Right Tilted	0.889	0.168	0.288	0.091	1.06	1.27
	Left Cheek	0.100	0.325	0.300	0.264	0.43	0.66
	Left Tilted	0.126	0.258	0.400	0.195	0.38	0.72
LTE Band 41 Ant 1	Right Cheek	0.081	0.159	0.302	0.093	0.24	0.48
	Right Tilted	0.104	0.168	0.288	0.091	0.27	0.48
	Left Cheek	0.099	0.325	0.300	0.264	0.42	0.66
	Left Tilted	0.148	0.258	0.400	0.195	0.41	0.74
FR1 n41 Ant 4	Right Cheek	0.853	0.159	0.302	0.093	1.01	1.25
	Right Tilted	1.002	0.168	0.288	0.091	1.17	1.38
	Left Cheek	0.310	0.325	0.300	0.264	0.64	0.87
	Left Tilted	0.384	0.258	0.400	0.195	0.64	0.98
FR1 n77 PC2 Ant 5	Right Cheek	0.564	0.159	0.302	0.093	0.72	0.96
	Right Tilted	0.626	0.168	0.288	0.091	0.79	1.01
	Left Cheek	0.761	0.325	0.300	0.264	1.09	1.33
	Left Tilted	0.852	0.258	0.400	0.195	1.11	1.45
FR1 n77 PC2 Ant 1	Right Cheek	0.258	0.159	0.302	0.093	0.42	0.65
	Right Tilted	0.265	0.168	0.288	0.091	0.43	0.64
	Left Cheek	0.398	0.325	0.300	0.264	0.72	0.96
	Left Tilted	0.180	0.258	0.400	0.195	0.44	0.78
FR1 n77 PC2 Ant 2	Right Cheek	0.345	0.159	0.302	0.093	0.50	0.74
	Right Tilted	0.163	0.168	0.288	0.091	0.33	0.54
	Left Cheek	0.183	0.325	0.300	0.264	0.51	0.75
	Left Tilted	0.152	0.258	0.400	0.195	0.41	0.75
FR1 n77 PC2 Ant 8	Right Cheek	0.077	0.159	0.302	0.093	0.24	0.47
	Right Tilted	0.064	0.168	0.288	0.091	0.23	0.44
	Left Cheek	0.080	0.325	0.300	0.264	0.41	0.64
	Left Tilted	0.067	0.258	0.400	0.195	0.33	0.66



WWAN Band	FR1 Band	Exposure Position	1	2	3	4	5	1+2+3	1+2+4+5	Case No
			WWAN	FR1	WLAN2.4GHz Ant 6	WLAN5GHz Ant 6	Bluetooth Ant 6	Summed	Summed	
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	
LTE Band 41(38) Ant 1	FR1 n77(78) PC2 Ant 5	Right Cheek	0.081	0.564	0.159	0.302	0.093	0.80	1.04	
		Right Tilted	0.104	0.626	0.168	0.288	0.091	0.90	1.11	
		Left Cheek	0.099	0.761	0.325	0.300	0.264	1.19	1.42	
		Left Tilted	0.148	0.852	0.258	0.400	0.195	1.26	1.60	35
LTE Band 5 Ant 0	FR1 n41 Ant 4	Right Cheek	0.250	0.853	0.159	0.302	0.093	1.26	1.50	
		Right Tilted	0.139	1.002	0.168	0.288	0.091	1.31	1.52	
		Left Cheek	0.220	0.310	0.325	0.300	0.264	0.86	1.09	
		Left Tilted	0.126	0.384	0.258	0.400	0.195	0.77	1.11	
LTE Band 5 Ant 0	FR1 n77(78) PC2 Ant 5	Right Cheek	0.250	0.564	0.159	0.302	0.093	0.97	1.21	
		Right Tilted	0.139	0.626	0.168	0.288	0.091	0.93	1.14	
		Left Cheek	0.220	0.761	0.325	0.300	0.264	1.31	1.55	
		Left Tilted	0.126	0.852	0.258	0.400	0.195	1.24	1.57	
LTE Band 7 Ant 1	FR1 n77(78) PC2 Ant 5	Right Cheek	0.391	0.564	0.159	0.302	0.093	1.11	1.35	
		Right Tilted	0.321	0.626	0.168	0.288	0.091	1.12	1.33	
		Left Cheek	0.647	0.761	0.325	0.300	0.264	1.73	1.97	1,2
		Left Tilted	0.204	0.852	0.258	0.400	0.195	1.31	1.65	3
LTE Band 7 Ant 4	FR1 n26(5) Ant 0	Right Cheek	1.007	0.165	0.159	0.302	0.093	1.33	1.57	
		Right Tilted	1.120	0.090	0.168	0.288	0.091	1.38	1.59	
		Left Cheek	0.298	0.159	0.325	0.300	0.264	0.78	1.02	
		Left Tilted	0.368	0.090	0.258	0.400	0.195	0.72	1.05	



17.2 Hotspot Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	1+2	1+3+4	Case No
		WWAN	WLAN2.4GHz Ant 6	WLAN5GHz Ant 6	Bluetooth Ant 6	Summed	Summed	
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	
LTE Band 7 Ant 4	Front	0.134	0.251	0.257	0.043	0.39	0.43	
	Back	0.713	0.547	0.516	0.121	1.26	1.35	
	Left side	0.203				0.20	0.20	
	Right side		0.308	0.512	0.050	0.31	0.56	
	Top side	0.347	0.249	0.615	0.032	0.60	0.99	
	Bottom side					0.00	0.00	
LTE Band 41 Ant 4	Front	0.133	0.251	0.257	0.043	0.38	0.43	
	Back	0.363	0.547	0.516	0.121	0.91	1.00	
	Left side	0.109				0.11	0.11	
	Right side		0.308	0.512	0.050	0.31	0.56	
	Top side	0.633	0.249	0.615	0.032	0.88	1.28	
	Bottom side					0.00	0.00	
LTE Band 41 Ant 1	Front	0.598	0.251	0.257	0.043	0.85	0.90	
	Back	1.242	0.547	0.516	0.121	1.79	1.88	17,18
	Left side	0.580				0.58	0.58	
	Right side		0.308	0.512	0.050	0.31	0.56	
	Top side		0.249	0.615	0.032	0.25	0.65	
	Bottom side	0.794				0.79	0.79	
FR1 n41 Ant 4	Front	0.240	0.251	0.257	0.043	0.49	0.54	
	Back	0.722	0.547	0.516	0.121	1.27	1.36	
	Left side	0.276				0.28	0.28	
	Right side		0.308	0.512	0.050	0.31	0.56	
	Top side	0.702	0.249	0.615	0.032	0.95	1.35	
	Bottom side					0.00	0.00	
FR1 n77 PC2 Ant 5	Front	0.226	0.251	0.257	0.043	0.48	0.53	
	Back	0.655	0.547	0.516	0.121	1.20	1.29	
	Left side	0.025				0.03	0.03	
	Right side	0.089	0.308	0.512	0.050	0.40	0.65	
	Top side	0.624	0.249	0.615	0.032	0.87	1.27	
	Bottom side					0.00	0.00	
FR1 n77 PC2 Ant 1	Front	0.586	0.251	0.257	0.043	0.84	0.89	
	Back	1.217	0.547	0.516	0.121	1.76	1.85	19,20
	Left side	0.601				0.60	0.60	
	Right side	0.021	0.308	0.512	0.050	0.33	0.58	
	Top side	0.036	0.249	0.615	0.032	0.29	0.68	
	Bottom side	0.634				0.63	0.63	
FR1 n77 PC2 Ant 2	Front	0.056	0.251	0.257	0.043	0.31	0.36	
	Back	0.622	0.547	0.516	0.121	1.17	1.26	
	Left side	0.294				0.29	0.29	
	Right side	0.015	0.308	0.512	0.050	0.32	0.58	
	Top side	0.029	0.249	0.615	0.032	0.28	0.68	
	Bottom side	0.018				0.02	0.02	
FR1 n77 PC2 Ant 8	Front	0.018	0.251	0.257	0.043	0.27	0.32	
	Back	0.601	0.547	0.516	0.121	1.15	1.24	
	Left side					0.00	0.00	
	Right side	0.096	0.308	0.512	0.050	0.40	0.66	
	Top side	0.014	0.249	0.615	0.032	0.26	0.66	
	Bottom side					0.00	0.00	



WWAN Band	FR1 Band	Exposure Position	1	2	3	4	5	1+2+3	1+2+4+5	Case No
			WWAN	FR1	WLAN2.4GHz Ant 6	WLAN5GHz Ant 6	Bluetooth Ant 6	Summed	Summed	
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	
LTE Band 41(38) Ant 1	FR1 n77(78) PC2 Ant 5	Front	0.598	0.226	0.251	0.257	0.043	1.08	1.12	
		Back	1.242	0.655	0.547	0.516	0.121	2.44	2.53	21,22
		Left side	0.580	0.025				0.61	0.61	
		Right side		0.089	0.308	0.512	0.050	0.40	0.65	
		Top side		0.624	0.249	0.615	0.032	0.87	1.27	
		Bottom side	0.794					0.79	0.79	
LTE Band 5 Ant 0	FR1 n41 Ant 4	Front	0.668	0.240	0.251	0.257	0.043	1.16	1.21	
		Back	1.414	0.722	0.547	0.516	0.121	2.68	2.77	23,24
		Left side	0.152	0.276				0.43	0.43	
		Right side	0.427		0.308	0.512	0.050	0.74	0.99	
		Top side		0.702	0.249	0.615	0.032	0.95	1.35	
		Bottom side	1.218					1.22	1.22	
LTE Band 5 Ant 0	FR1 n77(78) PC2 Ant 5	Front	0.668	0.226	0.251	0.257	0.043	1.15	1.19	
		Back	1.414	0.655	0.547	0.516	0.121	2.62	2.71	25,26
		Left side	0.152	0.025				0.18	0.18	
		Right side	0.427	0.089	0.308	0.512	0.050	0.82	1.08	
		Top side		0.624	0.249	0.615	0.032	0.87	1.27	
		Bottom side	1.218					1.22	1.22	
LTE Band 7 Ant 1	FR1 n77(78) PC2 Ant 5	Front	0.639	0.226	0.251	0.257	0.043	1.12	1.17	
		Back	1.260	0.655	0.547	0.516	0.121	2.46	2.55	27,28
		Left side	0.676	0.025				0.70	0.70	
		Right side	0.060	0.089	0.308	0.512	0.050	0.46	0.71	
		Top side		0.624	0.249	0.615	0.032	0.87	1.27	
		Bottom side	0.485					0.49	0.49	
LTE Band 7 Ant 4	FR1 n26(5) Ant 0	Front	0.134	0.524	0.251	0.257	0.043	0.91	0.96	
		Back	0.713	1.091	0.547	0.516	0.121	2.35	2.44	29,30
		Left side	0.203					0.20	0.20	
		Right side		0.227	0.308	0.512	0.050	0.54	0.79	
		Top side	0.347		0.249	0.615	0.032	0.60	0.99	
		Bottom side		0.676				0.68	0.68	

17.3 Body-Worn Accessory Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	1+2	1+3+4	Case No
		WWAN	WLAN2.4GHz Ant 6	WLAN5GHz Ant 6	Bluetooth Ant 6	Summed	Summed	
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	
LTE Band 7 Ant 4	Front	0.434	0.199	0.213	0.043	0.63	0.69	
	Back	0.904	0.370	0.375	0.121	1.27	1.40	
LTE Band 41 Ant 4	Front	0.347	0.199	0.213	0.043	0.55	0.60	
	Back	0.929	0.370	0.375	0.121	1.30	1.43	
LTE Band 41 Ant 1	Front	0.598	0.199	0.213	0.043	0.80	0.85	
	Back	1.242	0.370	0.375	0.121	1.61	1.74	4,5
FR1 n41 Ant 4	Front	0.390	0.199	0.213	0.043	0.59	0.65	
	Back	0.948	0.370	0.375	0.121	1.32	1.44	
FR1 n77 PC2 Ant 1	Front	0.500	0.199	0.213	0.043	0.70	0.76	
	Back	1.217	0.370	0.375	0.121	1.59	1.71	6
FR1 n77 PC2 Ant 2	Front	0.130	0.199	0.213	0.043	0.33	0.39	
	Back	0.832	0.370	0.375	0.121	1.20	1.33	
FR1 n77 PC2 Ant 5	Front	0.544	0.199	0.213	0.043	0.74	0.80	
	Back	0.830	0.370	0.375	0.121	1.20	1.33	
FR1 n77 PC2 Ant 8	Front	0.101	0.199	0.213	0.043	0.30	0.36	
	Back	0.812	0.370	0.375	0.121	1.18	1.31	

WWAN Band	FR1 Band	Exposure Position	1	2	3	4	5	1+2+3	1+2+4+5	Case No
			WWAN	FR1	WLAN2.4GHz Ant 6	WLAN5GHz Ant 6	Bluetooth Ant 6	Summed	Summed	
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	
LTE Band 41(38) Ant 1	FR1 n77(78) PC2 Ant 5	Front	0.598	0.544	0.199	0.213	0.043	1.34	1.40	
		Back	1.242	0.830	0.370	0.375	0.121	2.44	2.57	7,8
LTE Band 5 Ant 0	FR1 n41 Ant 4	Front	0.668	0.392	0.199	0.213	0.043	1.26	1.32	
		Back	1.414	0.948	0.370	0.375	0.121	2.73	2.86	9,10
LTE Band 5 Ant 0	FR1 n77(78) PC2 Ant 5	Front	0.668	0.544	0.199	0.213	0.043	1.41	1.47	
		Back	1.414	0.830	0.370	0.375	0.121	2.61	2.74	11,12
LTE Band 7 Ant 1	FR1 n77(78) PC2 Ant 5	Front	0.639	0.544	0.199	0.213	0.043	1.38	1.44	
		Back	1.260	0.830	0.370	0.375	0.121	2.46	2.59	13,14
LTE Band 7 Ant 4	FR1 n26(5) Ant 0	Front	0.434	0.524	0.199	0.213	0.043	1.16	1.21	
		Back	0.904	1.091	0.370	0.375	0.121	2.37	2.49	15,16



<Sensor off>

WWAN Band	Exposure Position	1	2	3	4	1+2	1+3+4
		WWAN	WLAN2.4GHz Ant 6	WLAN5GHz Ant 6	Bluetooth Ant 6	Summed	Summed
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
LTE Band 7 Ant 4	Front	0.367	0.128	0.282	0.043	0.50	0.69
	Back	0.516	0.188	0.578	0.043	0.70	1.14
LTE Band 41 Ant 4	Front	0.275	0.128	0.282	0.043	0.40	0.60
	Back	0.592	0.188	0.578	0.043	0.78	1.21
LTE Band 41 Ant 1	Front	0.317	0.128	0.282	0.043	0.45	0.64
	Back	0.244	0.188	0.578	0.043	0.43	0.87
FR1 n41 Ant 4	Front	0.247	0.128	0.282	0.043	0.38	0.57
	Back	0.467	0.188	0.578	0.043	0.66	1.09
FR1 n77 PC2 Ant 1	Front	0.348	0.128	0.282	0.043	0.48	0.67
	Back	0.490	0.188	0.578	0.043	0.68	1.11
FR1 n77 PC2 Ant 2	Front	0.103	0.128	0.282	0.043	0.23	0.43
	Back	0.205	0.188	0.578	0.043	0.39	0.83
FR1 n77 PC2 Ant 5	Front	0.423	0.128	0.282	0.043	0.55	0.75
	Back	0.534	0.188	0.578	0.043	0.72	1.16
FR1 n77 PC2 Ant 8	Front	0.041	0.128	0.282	0.043	0.17	0.37
	Back	0.237	0.188	0.578	0.043	0.43	0.86

WWAN Band	FR1 Band	Exposure Position	1	2	3	4	5	1+2+3	1+2+4+5	Case No
			WWAN	FR1	WLAN2.4GHz Ant 6	WLAN5GHz Ant 6	Bluetooth Ant 6	Summed	Summed	
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	
LTE Band 41(38) Ant 1	FR1 n77(78) PC2 Ant 5	Front	0.317	0.423	0.128	0.282	0.043	0.87	1.07	
		Back	0.244	0.534	0.188	0.578	0.121	0.97	1.48	
LTE Band 5 Ant 0	FR1 n41 Ant 4	Front	0.215	0.272	0.128	0.282	0.043	0.62	0.81	
		Back	0.249	0.514	0.188	0.578	0.121	0.95	1.46	
LTE Band 5 Ant 0	FR1 n77(78) PC2 Ant 5	Front	0.215	0.423	0.128	0.282	0.043	0.77	0.96	
		Back	0.249	0.534	0.188	0.578	0.121	0.97	1.48	
LTE Band 7 Ant 1	FR1 n77(78) PC2 Ant 5	Front	0.453	0.423	0.128	0.282	0.043	1.00	1.20	
		Back	0.445	0.534	0.188	0.578	0.121	1.17	1.68	40
LTE Band 7 Ant 4	FR1 n26(5) Ant 0	Front	0.367	0.199	0.128	0.282	0.043	0.69	0.89	
		Back	0.516	0.233	0.188	0.578	0.121	0.94	1.45	



17.4 Product specific 10g SAR Exposure Conditions

Remark:

- For Bluetooth Product specific 10g stand-alone SAR is not required for a transmitter or antenna, due to 1g hotspot SAR is <1.2W/kg.

WWAN Band	Exposure Position	1	2	3	5	1+2+5	1+3+5
		WWAN	WLAN2.4GHz Ant 6	WLAN5GHz Ant 6	NFC	Summed	Summed
		10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)
LTE Band 7 Ant 4	Front			0.753	0.001	0.00	0.75
	Back	2.377	0.847	0.746	0.012	3.24	3.14
	Left side				0.001	0.00	0.00
	Right side			0.756	0.001	0.00	0.76
	Top side			0.983	0.001	0.00	0.98
	Bottom side				0.001	0.00	0.00
LTE Band 41 Ant 4	Front			0.753	0.001	0.00	0.75
	Back	3.125	0.847	0.746	0.012	3.98	3.88
	Left side				0.001	0.00	0.00
	Right side			0.756	0.001	0.00	0.76
	Top side	1.740		0.983	0.001	1.74	2.72
	Bottom side				0.001	0.00	0.00
LTE Band 41 Ant 1	Front			0.753	0.001	0.00	0.75
	Back	2.185	0.847	0.746	0.012	3.04	2.94
	Left side				0.001	0.00	0.00
	Right side			0.756	0.001	0.00	0.76
	Top side			0.983	0.001	0.00	0.98
	Bottom side				0.001	0.00	0.00
FR1 n41 Ant 4	Front			0.753	0.001	0.00	0.75
	Back	2.675	0.847	0.746	0.012	3.53	3.43
	Left side				0.001	0.00	0.00
	Right side			0.756	0.001	0.00	0.76
	Top side	2.549		0.983	0.001	2.55	3.53
	Bottom side				0.001	0.00	0.00
FR1 n77 PC2 Ant 5	Front			0.753	0.001	0.00	0.75
	Back	0.823	0.847	0.746	0.012	1.68	1.58
	Left side				0.001	0.00	0.00
	Right side			0.756	0.001	0.00	0.76
	Top side	2.527		0.983	0.001	2.53	3.51
	Bottom side				0.001	0.00	0.00
FR1 n77 PC2 Ant 1	Front			0.753	0.001	0.00	0.75
	Back	2.823	0.847	0.746	0.012	3.68	3.58
	Left side				0.001	0.00	0.00
	Right side			0.756	0.001	0.00	0.76
	Top side			0.983	0.001	0.00	0.98
	Bottom side				0.001	0.00	0.00
FR1 n77 PC2 Ant 8	Front			0.753	0.001	0.00	0.75
	Back	1.744	0.847	0.746	0.012	2.60	2.50
	Left side				0.001	0.00	0.00
	Right side			0.756	0.001	0.00	0.76
	Top side			0.983	0.001	0.00	0.98
	Bottom side				0.001	0.00	0.00




WWAN Band	FR1 Band	Exposure Position	1	2	3	4	6	1+2+3+6	1+2+4+6	Case No
			WWAN	FR1	WLAN2.4GHz	WLAN5GHz	NFC	Summed	Summed	
			10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	
LTE Band 41(38) Ant 1	FR1 n77(78) PC2 Ant 5	Front				0.753	0.001	0.00	0.75	
		Back	2.185	0.823	0.847	0.746	0.012	3.87	3.77	
		Left side					0.001	0.00	0.00	
		Right side				0.756	0.001	0.00	0.76	
		Top side		2.527		0.983	0.001	2.53	3.51	
		Bottom side					0.001	0.00	0.00	
LTE Band 5 Ant 0	FR1 n41 Ant 4	Front				0.753	0.001	0.00	0.75	
		Back	1.304	2.675	0.847	0.746	0.012	4.84	4.74	31,32
		Left side					0.001	0.00	0.00	
		Right side				0.756	0.001	0.00	0.76	
		Top side		2.549		0.983	0.001	2.55	3.53	
		Bottom side					0.001	0.00	0.00	
LTE Band 5 Ant 0	FR1 n77(78) PC2 Ant 5	Front				0.753	0.001	0.00	0.75	
		Back	1.304	0.823	0.847	0.746	0.012	2.99	2.89	
		Left side					0.001	0.00	0.00	
		Right side				0.756	0.001	0.00	0.76	
		Top side		2.527		0.983	0.001	2.53	3.51	
		Bottom side					0.001	0.00	0.00	
LTE Band 7 Ant 1	FR1 n77(78) PC2 Ant 5	Front	1.676			0.753	0.001	1.68	2.43	
		Back	2.520	0.823	0.847	0.746	0.012	4.20	4.10	33,34
		Left side	1.498				0.001	1.50	1.50	
		Right side				0.756	0.001	0.00	0.76	
		Top side		2.527		0.983	0.001	2.53	3.51	
		Bottom side					0.001	0.00	0.00	
LTE Band 7 Ant 4	FR1 n26(5) Ant 0	Front				0.753	0.001	0.00	0.75	
		Back	2.377		0.847	0.746	0.012	3.24	3.14	
		Left side					0.001	0.00	0.00	
		Right side				0.756	0.001	0.00	0.76	
		Top side				0.983	0.001	0.00	0.98	
		Bottom side					0.001	0.00	0.00	


17.5 SPLSR Evaluation and Analysis

General Note:


1. When standalone SAR is measured for both antennas in the pair, the peak location separation distance is computed by the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where $(x1, y1, z1)$ and $(x2, y2, z2)$ are the coordinates in the area scans or extrapolated peak SAR locations in the zoom scans, as appropriate.
2. $SPLSR = (SAR1 + SAR2)1.5 / (\text{min. separation distance, mm})$. If $SPLSR \leq 0.04$ for 1g SAR and $SPLSR \leq 0.10$ for 10g SAR, simultaneously transmission SAR measurement is not necessary.
3. Per April 2022 TCB Workshop Notes, WWAN ant 4/5 was summed algebraically with the BT/WIFI Antenna 6/NFC antenna for the purposes of hybrid SPLSR combination and they are located at the top of the device.
4. Per April 2022 TCB Workshop, instead of doing a small volume scan over a co-located antenna pair, used summing the SAR values of the co-located pair and using that value in SPLSR calculation. In the calculation used the minimum distance between the spatially separated antenna and the closest antenna of the co-located antenna pair to be conservative.

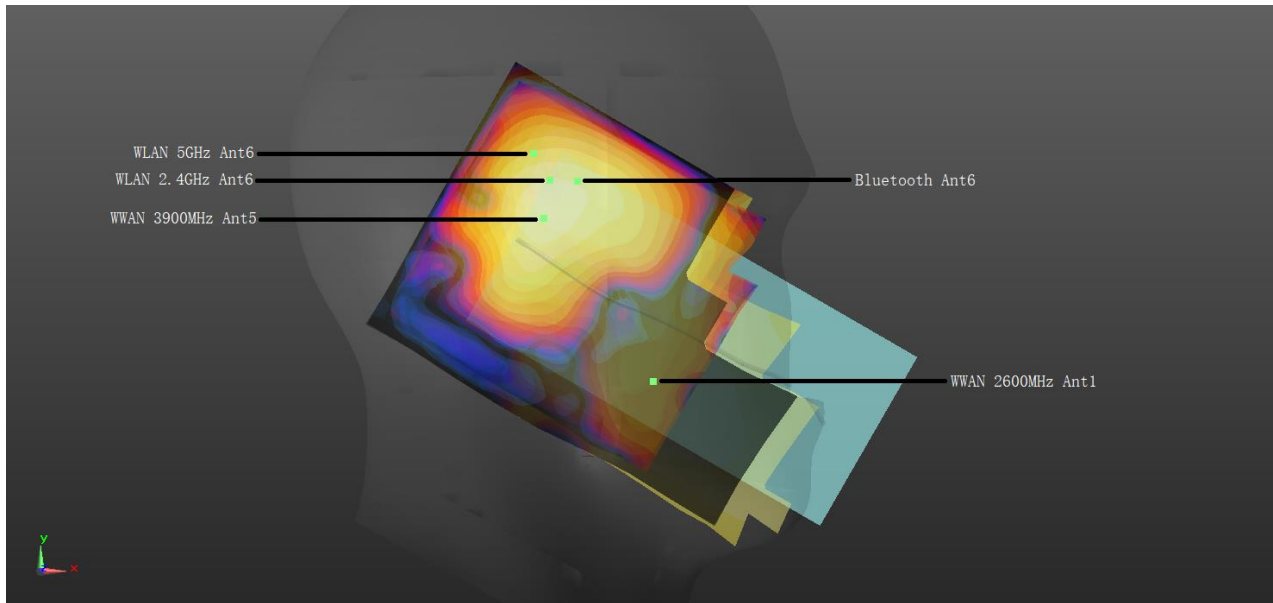


WWAN+2.4GHz/WWAN+5GHz+Bluetooth(0mm)_Left Check

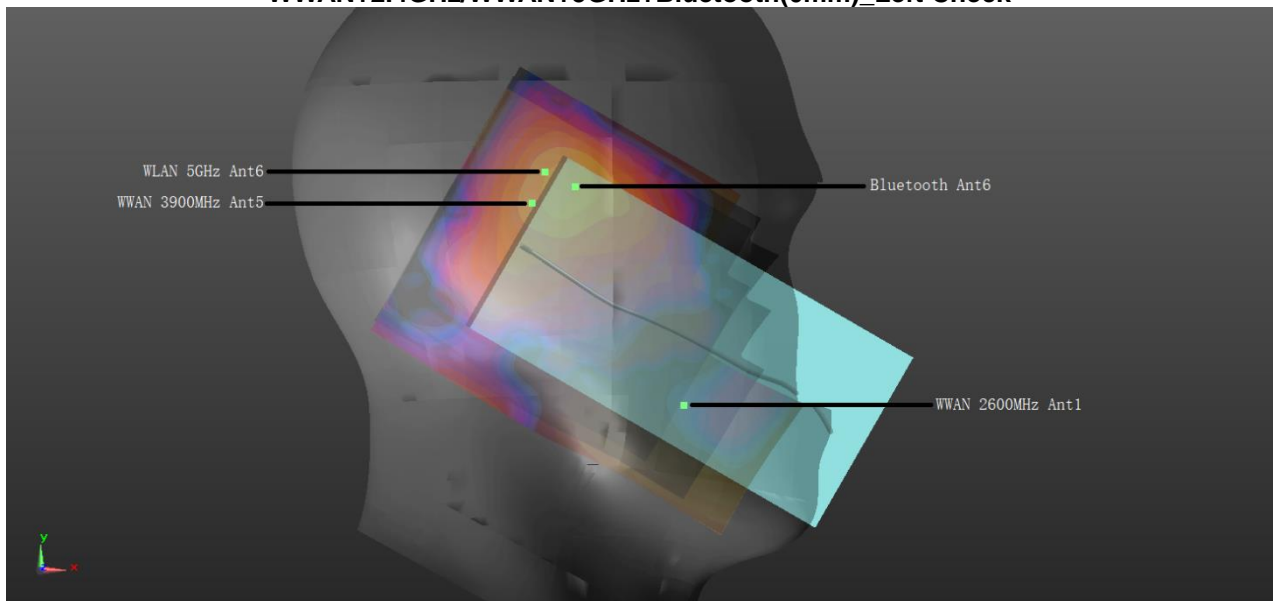



WWAN+5GHz+Bluetooth (0mm)_Left Tilted

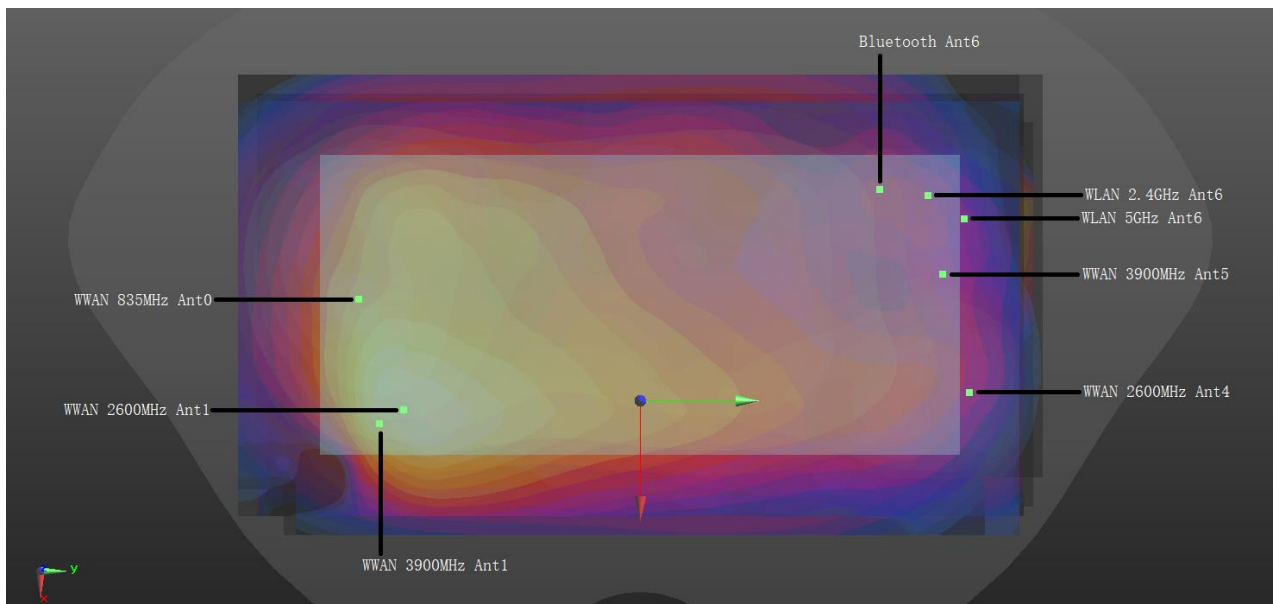

WWAN+2.4GHz/WWAN+5GHz+Bluetooth (5mm)_Back for Hotspot

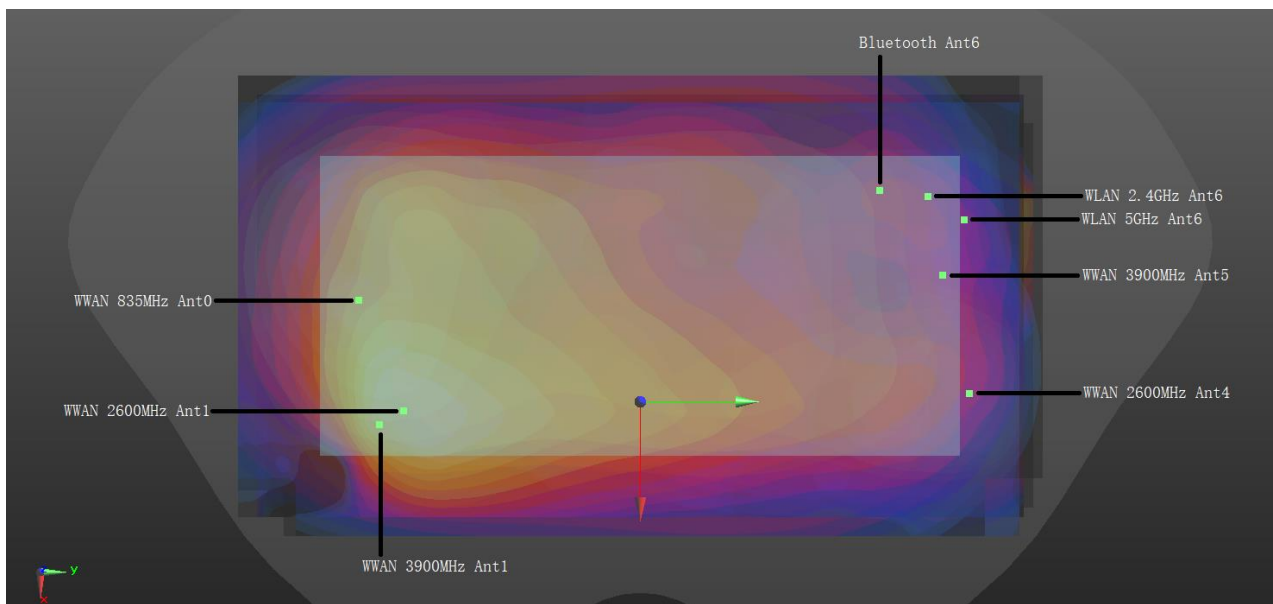

WWAN+2.4GHz/WWAN+5GHz+Bluetooth (5mm)_Back for Body-worn

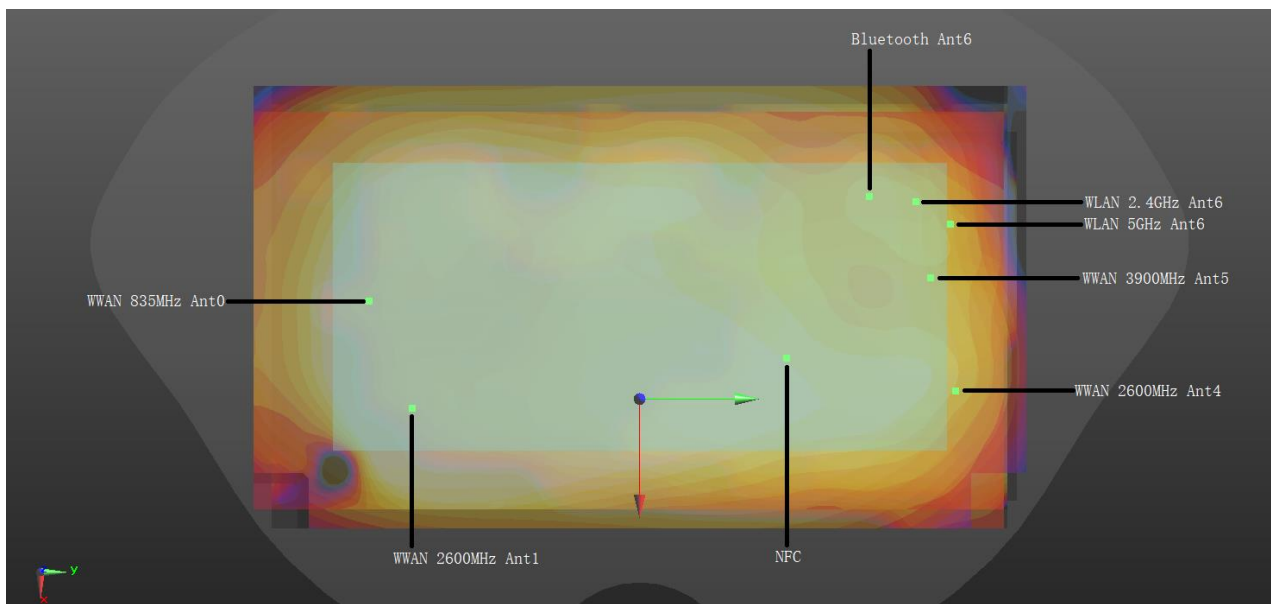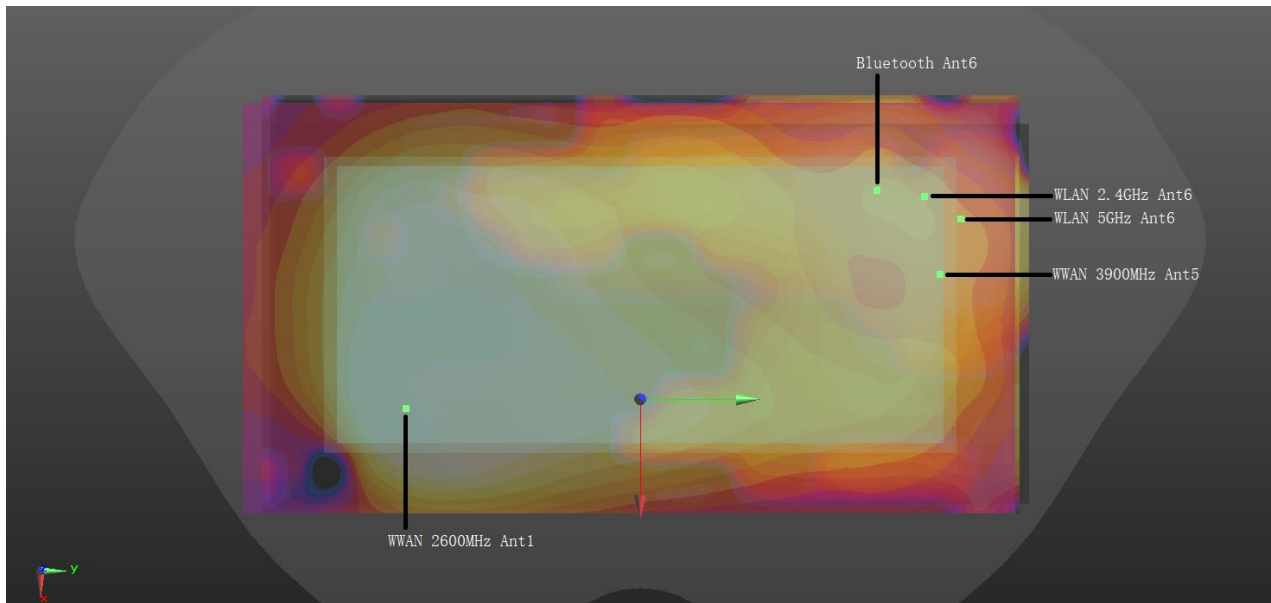



<For Head>

Case No	Band	Position	SAR 1g SAR (W/kg)	Summed	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR								
				1g SAR (W/kg)		X	Y	Z												
Case 1	LTE Band 7 Ant 1	Left Cheek	0.647	0.647	0mm	5.75	-59.08	-0.38	74.8	1.73	0.03	Not required								
	FR1 n77 Ant 5		7.04			15.71	0.36													
	WLAN2.4G Ant6		0.325																	
	LTE Band 7 Ant 1	Left Cheek	0.647	0.647	0mm	5.75	-59.08	-0.38					84.0	1.73	0.03	Not required				
	FR1 n77 Ant 5		7.04			15.71	0.36													
	WLAN2.4G Ant6		0.325	12.02	24.69	0.45														
Case 2	LTE Band 7 Ant 1	Left Cheek	0.647	0.647	0mm	5.75	-59.08	-0.38	74.8	1.97	0.04	Not required								
	FR1 n77 Ant 5		7.04			15.71	0.36													
	WLAN5GHz Ant 6		0.3																	
	Bluetooth Ant 6		0.264																	
	LTE Band 7 Ant 1	Left Cheek	0.647	0.647	0mm	5.75	-59.08	-0.38					90.8	1.97	0.03	Not required				
	FR1 n77 Ant 5		7.04			15.71	0.36													
	WLAN5GHz Ant 6		0.3	9.24	31.63	0.76														
	Bluetooth Ant 6		0.264																	
	LTE Band 7 Ant 1	Left Cheek	0.647	0.647	0mm	5.75	-59.08	-0.38									84.7	1.97	0.03	Not required
	FR1 n77 Ant 5		7.04			15.71	0.36													
	WLAN5GHz Ant 6		0.3																	
	Bluetooth Ant 6		0.264	12.31	25.41	-0.27														
Case 3	LTE Band 7 Ant 1	Left Tilted	0.204	0.204	0mm	6.22	-63.84	3.25	77.6	1.65	0.03	Not required								
	FR1 n77 Ant 5		3.29			13.61	-0.13													
	WLAN5GHz Ant 6		0.4																	
	Bluetooth Ant 6		0.195																	
	LTE Band 7 Ant 1	Left Tilted	0.204	0.204	0mm	6.22	-63.84	3.25					94.1	1.65	0.02	Not required				
	FR1 n77 Ant 5		3.29			13.61	-0.13													
	WLAN5GHz Ant 6		0.4	10.54	30.14	0.8														
	Bluetooth Ant 6		0.195																	
	LTE Band 7 Ant 1	Left Tilted	0.204	0.204	0mm	6.22	-63.84	3.25									88.6	1.65	0.02	Not required
	FR1 n77 Ant 5		3.29			13.61	-0.13													
	WLAN5GHz Ant 6		0.4																	
	Bluetooth Ant 6		0.195	14.74	24.3	-0.11														

Case No	Band	Position	SAR 1g SAR (W/kg)	Summed	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR								
				1g SAR (W/kg)		X	Y	Z												
Case 35	LTE Band 41 Ant 1	Left Tilted	0.148	0.148	0mm	6.15	-65.22	3.45	79.0	1.60	0.03	Not required								
	FR1 n77 Ant 5		3.29			13.61	-0.13													
	WLAN5GHz Ant 6		0.4																	
	Bluetooth Ant 6		0.195																	
	LTE Band 41 Ant 1	Left Tilted	0.148	0.148	0mm	6.15	-65.22	3.45					95.5	1.60	0.02	Not required				
	FR1 n77 Ant 5		3.29			13.61	-0.13													
	WLAN5GHz Ant 6		0.4	10.54	30.14	0.8														
	Bluetooth Ant 6		0.195																	
	LTE Band 41 Ant 1	Left Tilted	0.148	0.148	0mm	6.15	-65.22	3.45									90.0	1.60	0.02	Not required
	FR1 n77 Ant 5		3.29			13.61	-0.13													
	WLAN5GHz Ant 6		0.4																	
	Bluetooth Ant 6		0.195	14.74	24.3	-0.11														



<For Hotspot>

Case No	Band	Position	SAR 1g SAR (W/kg)	Gap	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR		
				(mm)	X	Y	Z						
Case 17	LTE Band 41 Ant 1	Back	1.242	5mm	29.6	-60.8	0.25	143.5	1.79	0.02	Not required		
	WLAN2.4GHz Ant 6		0.547	5mm	-25.3	71.8	0.26						
Case No	Band	Position	SAR 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR	
Case 18	LTE Band 41 Ant 1	Back	1.242	1.242	5mm	29.6	-60.8	0.25					
	WLAN5GHz Ant 6		0.64	5mm	-20.9	84.5	0.1						
	Bluetooth Ant 6			5mm									
	LTE Band 41 Ant 1	Back	1.242	1.242	5mm	29.6	-60.8	0.25	152.6	1.88	0.02	Not required	
	WLAN5GHz Ant 6		0.64	5mm									
	Bluetooth Ant 6			5mm	-35	77.4	-0.13						
Case 19	FR1 n77 Ant 1	Back	1.217	5mm	32.2	-71.2	0.34	154.1	1.76	0.02	Not required		
	WLAN2.4GHz Ant 6		0.547	5mm	-25.3	71.8	0.26						
Case No	Band	Position	SAR 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR	
Case 20	FR1 n77 Ant 1	Back	1.217	1.217	5mm	32.2	-71.2	0.34					
	WLAN5GHz Ant 6		0.64	5mm	-20.9	84.5	0.1						
	Bluetooth Ant 6			5mm									
	FR1 n77 Ant 1	Back	1.217	1.217	5mm	32.2	-71.2	0.34	163.1	1.85	0.02	Not required	
	WLAN5GHz Ant 6		0.64	5mm									
	Bluetooth Ant 6			5mm	-35	77.4	-0.13						
Case 21	LTE Band 41 Ant 1	Back	1.242	1.242	5mm	29.6	-60.8	0.25	144.4	2.44	0.03	Not required	
	FR1 n77 Ant 5		1.20	5mm	-5.8	79.2	-1.24						
	WLAN2.4GHz Ant 6	0.547		5mm									
	LTE Band 41 Ant 1	Back	1.242	1.242	5mm	29.6	-60.8	0.25	143.5	2.44	0.03	Not required	
	FR1 n77 Ant 5		1.20	5mm									
WLAN2.4GHz Ant 6	0.547			5mm	-25.3	71.8	0.26						
Case No	Band	Position	SAR 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR	
Case 22	LTE Band 41 Ant 1	Back	1.242	1.242	5mm	29.6	-60.8	0.25					
	FR1 n77 Ant 5		1.29	5mm	-5.8	79.2	-1.24						
	WLAN5GHz Ant 6			5mm									
	Bluetooth Ant 6			5mm									
	LTE Band 41 Ant 1	Back	1.242	1.242	5mm	29.6	-60.8	0.25	153.8	2.53	0.03	Not required	
	FR1 n77 Ant 5		1.29	5mm									
	WLAN5GHz Ant 6			5mm	-20.9	84.5	0.1						
	Bluetooth Ant 6			5mm									
	LTE Band 41 Ant 1	Back	1.242	1.242	5mm	29.6	-60.8	0.25	152.6	2.53	0.03	Not required	
	FR1 n77 Ant 5		1.29	5mm									
	WLAN5GHz Ant 6			5mm									
	Bluetooth Ant 6			5mm	-35	77.4	-0.13						
Case No	Band	Position	SAR 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR	
Case 23	LTE Band 5 Ant 0	Back	1.414	1.414	5mm	-9.3	-78.3	-0.02					
	FR1 n41 Ant 4		1.27	5mm	20.8	86.8	0.33						
	WLAN2.4GHz Ant 6			5mm									
	LTE Band 5 Ant 0	Back	1.414	1.414	5mm	-9.3	-78.3	-0.02	151.0	2.68	0.03	Not required	
	FR1 n41 Ant 4		1.27	5mm									
	WLAN2.4GHz Ant 6			0.547	5mm	-25.3	71.8	0.26					



Case No	Band	Position	SAR 1g SAR (W/kg)	Summed	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				1g SAR (W/kg)		X	Y	Z				
Case 24	LTE Band 5 Ant 0	Back	1.414	1.414	5mm	-9.3	-78.3	-0.02	167.8	2.77	0.03	Not required
	FR1 n41 Ant 4		0.722	1.36	5mm	20.8	86.8	0.33				
	WLAN5GHz Ant 6		0.516		5mm							
	Bluetooth Ant 6		0.121		5mm							
	LTE Band 5 Ant 0	Back	1.414	1.414	5mm	-9.3	-78.3	-0.02	163.2	2.77	0.03	Not required
	FR1 n41 Ant 4		0.722	1.36	5mm							
	WLAN5GHz Ant 6		0.516		5mm	-20.9	84.5	0.1				
	Bluetooth Ant 6		0.121		5mm							
	LTE Band 5 Ant 0	Back	1.414	1.414	5mm	-9.3	-78.3	-0.02	157.8	2.77	0.03	Not required
	FR1 n41 Ant 4		0.722	1.36	5mm							
	WLAN5GHz Ant 6		0.516		5mm							
	Bluetooth Ant 6		0.121		5mm	-35	77.4	-0.13				
Case 25	LTE Band 5 Ant 0	Back	1.414	1.414	5mm	-9.3	-78.3	-0.02	157.5	2.62	0.03	Not required
	FR1 n77 Ant 5		0.655	1.20	5mm	-5.8	79.2	-1.24				
	WLAN2.4GHz Ant 6		0.547		5mm							
	LTE Band 5 Ant 0	Back	1.414	1.414	5mm	-9.3	-78.3	-0.02	151.0	2.62	0.03	Not required
	FR1 n77 Ant 5		0.655	1.20	5mm							
	WLAN2.4GHz Ant 6		0.547		5mm	-25.3	71.8	0.26				
Case 26	LTE Band 5 Ant 0	Back	1.414	1.414	5mm	-9.3	-78.3	-0.02	157.5	2.71	0.03	Not required
	FR1 n77 Ant 5		0.655	1.29	5mm	-5.8	79.2	-1.24				
	WLAN5GHz Ant 6		0.516		5mm							
	Bluetooth Ant 6		0.121		5mm							
	LTE Band 5 Ant 0	Back	1.414	1.414	5mm	-9.3	-78.3	-0.02	163.2	2.71	0.03	Not required
	FR1 n77 Ant 5		0.655	1.29	5mm							
	WLAN5GHz Ant 6		0.516		5mm	-20.9	84.5	0.1				
	Bluetooth Ant 6		0.121		5mm							
	LTE Band 5 Ant 0	Back	1.414	1.414	5mm	-9.3	-78.3	-0.02	157.8	2.71	0.03	Not required
	FR1 n77 Ant 5		0.655	1.29	5mm							
	WLAN5GHz Ant 6		0.516		5mm							
	Bluetooth Ant 6		0.121		5mm	-35	77.4	-0.13				
Case 27	LTE Band 7 Ant 1	Back	1.26	1.26	5mm	28.4	-62.8	0.13	146.1	2.46	0.03	Not required
	FR1 n77 Ant 5		0.655	1.20	5mm	-5.8	79.2	-1.24				
	WLAN2.4GHz Ant 6		0.547		5mm							
	LTE Band 7 Ant 1	Back	1.26	1.26	5mm	28.4	-62.8	0.13	144.9	2.46	0.03	Not required
	FR1 n77 Ant 5		0.655	1.20	5mm							
	WLAN2.4GHz Ant 6		0.547		5mm	-25.3	71.8	0.26				
Case 28	LTE Band 7 Ant 1	Back	1.26	1.26	5mm	28.4	-62.8	0.13	146.1	2.55	0.03	Not required
	FR1 n77 Ant 5		0.655	1.29	5mm	-5.8	79.2	-1.24				
	WLAN5GHz Ant 6		0.516		5mm							
	Bluetooth Ant 6		0.121		5mm							
	LTE Band 7 Ant 1	Back	1.26	1.26	5mm	28.4	-62.8	0.13	155.3	2.55	0.03	Not required
	FR1 n77 Ant 5		0.655	1.29	5mm							
	WLAN5GHz Ant 6		0.516		5mm	-20.9	84.5	0.1				
	Bluetooth Ant 6		0.121		5mm							
	LTE Band 7 Ant 1	Back	1.26	1.26	5mm	28.4	-62.8	0.13	153.9	2.55	0.03	Not required
	FR1 n77 Ant 5		0.655	1.29	5mm							



Case No	Band	Position	SAR	Summed	Gap	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
			1g SAR (W/kg)			1g SAR (W/kg)	(mm)	X				
	WLAN5GHz Ant 6		0.516		5mm							
	Bluetooth Ant 6		0.121		5mm	-35	77.4	-0.13				
Case 29	LTE Band 7 Ant 4	Back	0.713	0.713	5mm	16.1	90.2	0.29	165.1	2.35	0.02	Not required
	FR1 n26 Ant 0		1.091	1.64	5mm	-6.1	-73.4	0.05				
	WLAN2.4GHz Ant 6		0.547		5mm							
	LTE Band 7 Ant 4	Back	0.713	0.713	5mm				146.5	2.35	0.02	Not required
	FR1 n26 Ant 0		1.091	1.64	5mm	-6.1	-73.4	0.05				
	WLAN2.4GHz Ant 6		0.547		5mm	-25.3	71.8	0.26				

<For Body-worn>

Case No	Band	Position	SAR	Summed	Gap	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
			1g SAR (W/kg)			1g SAR (W/kg)	(mm)	X				
Case 4	LTE Band 41 Ant 1	Back	1.242		5mm	29.6	-60.8	0.25	143.5	1.61	0.01	Not required
	WLAN2.4GHz Ant 6		0.37		5mm	-25.3	71.8	0.26				
Case No	Band	Position	SAR	Summed	Gap	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
			1g SAR (W/kg)			1g SAR (W/kg)	(mm)	X				
Case 5	LTE Band 41 Ant 1	Back	1.242	1.242	5mm	29.6	-60.8	0.25	153.8	1.74	0.01	Not required
	WLAN5GHz Ant 6		0.375	0.50	5mm	-20.9	84.5	0.1				
	Bluetooth Ant 6		0.121		5mm							
	LTE Band 41 Ant 1	Back	1.242	1.242	5mm	29.6	-60.8	0.25	152.6	1.74	0.02	Not required
	WLAN5GHz Ant 6		0.375	0.50	5mm							
	Bluetooth Ant 6		0.121		5mm	-35	77.4	-0.13				
Case 6	FR1 n77 Ant 1	Back	1.217	1.217	5mm	32.2	-71.2	0.34	164.5	1.71	0.01	Not required
	WLAN5GHz Ant 6		0.375	0.50	5mm	-20.9	84.5	0.1				
	Bluetooth Ant 6		0.121		5mm							
	FR1 n77 Ant 1	Back	1.217	1.217	5mm	32.2	-71.2	0.34	163.1	1.71	0.01	Not required
	WLAN5GHz Ant 6		0.375	0.50	5mm							
	Bluetooth Ant 6		0.121		5mm	-35	77.4	-0.13				
Case 7	LTE Band 41 Ant 1	Back	1.242	1.242	5mm	29.6	-60.8	0.25	144.4	2.44	0.03	Not required
	FR1 n77 Ant 5		0.83	1.20	5mm	-5.8	79.2	-1.24				
	WLAN2.4GHz Ant 6		0.37		5mm							
	LTE Band 41 Ant 1	Back	1.242	1.242	5mm	29.6	-60.8	0.25	143.5	2.44	0.03	Not required
	FR1 n77 Ant 5		0.83	1.20	5mm							
	WLAN2.4GHz Ant 6		0.37		5mm	-25.3	71.8	0.26				



			1g SAR (W/kg)	1g SAR (W/kg)	(mm)	X	Y	Z	distance (mm)	SAR (W/kg)		SAR
Case 8	LTE Band 41 Ant 1	Back	1.242	1.242	5mm	29.6	-60.8	0.25	144.4	2.57	0.03	Not required
	FR1 n77 Ant 5		0.83	1.33	5mm	-5.8	79.2	-1.24				
	WLAN5GHz Ant 6		0.375		5mm							
	Bluetooth Ant 6		0.121		5mm							
	LTE Band 41 Ant 1	Back	1.242	1.242	5mm	29.6	-60.8	0.25	153.8	2.57	0.03	Not required
	FR1 n77 Ant 5		0.83	1.33	5mm							
	WLAN5GHz Ant 6		0.375		5mm	-20.9	84.5	0.1				
	Bluetooth Ant 6		0.121		5mm							
	LTE Band 41 Ant 1	Back	1.242	1.242	5mm	29.6	-60.8	0.25	152.6	2.57	0.03	Not required
	FR1 n77 Ant 5		0.83	1.33	5mm							
	WLAN5GHz Ant 6		0.375		5mm							
	Bluetooth Ant 6		0.121		5mm	-35	77.4	-0.13				
Case No	Band	Position	SAR 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
Case 9	LTE Band 5 Ant 0	Back	1.414	1.414	5mm	-9.3	-78.3	-0.02	167.8	2.73	0.03	Not required
	FR1 n41 Ant 4		0.948	1.32	5mm	20.8	86.8	0.33				
	WLAN2.4GHz Ant 6		0.37		5mm							
	LTE Band 5 Ant 0	Back	1.414	1.414	5mm	-9.3	-78.3	-0.02	151.0	2.73	0.03	Not required
	FR1 n41 Ant 4		0.948	1.32	5mm							
	WLAN2.4GHz Ant 6		0.37		5mm	-25.3	71.8	0.26				
Case 10	LTE Band 5 Ant 0	Back	1.414	1.414	5mm	-9.3	-78.3	-0.02	167.8	2.86	0.03	Not required
	FR1 n41 Ant 4		0.948	1.44	5mm	20.8	86.8	0.33				
	WLAN5GHz Ant 6		0.375		5mm							
	Bluetooth Ant 6		0.121		5mm							
	LTE Band 5 Ant 0	Back	1.414	1.414	5mm	-9.3	-78.3	-0.02	163.2	2.86	0.03	Not required
	FR1 n41 Ant 4		0.948	1.44	5mm							
	WLAN5GHz Ant 6		0.375		5mm	-20.9	84.5	0.1				
	Bluetooth Ant 6		0.121		5mm							
	LTE Band 5 Ant 0	Back	1.414	1.414	5mm	-9.3	-78.3	-0.02	157.8	2.86	0.03	Not required
	FR1 n41 Ant 4		0.948	1.44	5mm							
	WLAN5GHz Ant 6		0.375		5mm							
	Bluetooth Ant 6		0.121		5mm	-35	77.4	-0.13				
Case No	Band	Position	SAR 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
Case 11	LTE Band 5 Ant 0	Back	1.414	1.414	5mm	-9.3	-78.3	-0.02	157.5	2.61	0.03	Not required
	FR1 n77 Ant 5		0.83	1.20	5mm	-5.8	79.2	-1.24				
	WLAN2.4GHz Ant 6		0.37		5mm							
	LTE Band 5 Ant 0	Back	1.414	1.414	5mm	-9.3	-78.3	-0.02	151.0	2.61	0.03	Not required
	FR1 n77 Ant 5		0.83	1.20	5mm							
	WLAN2.4GHz Ant 6		0.37		5mm	-25.3	71.8	0.26				
Case 12	LTE Band 5 Ant 0	Back	1.414	1.414	5mm	-9.3	-78.3	-0.02	157.5	2.74	0.03	Not required
	FR1 n77 Ant 5		0.83	1.33	5mm	-5.8	79.2	-1.24				
	WLAN5GHz Ant 6		0.375		5mm							
	Bluetooth Ant 6		0.121		5mm							
	LTE Band 5 Ant 0	Back	1.414	1.414	5mm	-9.3	-78.3	-0.02	163.2	2.74	0.03	Not required
	FR1 n77 Ant 5		0.83	1.33	5mm							
	WLAN5GHz Ant 6		0.375		5mm	-20.9	84.5	0.1				
	Bluetooth Ant 6		0.121		5mm							
	LTE Band 5 Ant 0	Back	1.414	1.414	5mm	-9.3	-78.3	-0.02	157.8	2.74	0.03	Not required
	FR1 n77 Ant 5		0.83	1.33	5mm							
	WLAN5GHz Ant 6		0.375		5mm							



Case No	Band	Position	SAR	Summed	Gap	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
			1g SAR (W/kg)	1g SAR (W/kg)	(mm)	X	Y	Z				
	Bluetooth Ant 6		0.121		5mm	-35	77.4	-0.13				
Case 13	LTE Band 7 Ant 1	Back	1.26	1.26	5mm	28.4	-62.8	0.13	146.1	2.46	0.03	Not required
	FR1 n77 Ant 5		0.83		5mm	-5.8	79.2	-1.24				
	WLAN2.4GHz Ant 6		0.37	5mm								
	LTE Band 7 Ant 1	Back	1.26	1.26	5mm	28.4	-62.8	0.13	144.9	2.46	0.03	Not required
	FR1 n77 Ant 5		0.83		5mm							
	WLAN2.4GHz Ant 6		0.37	5mm	-25.3	71.8	0.26					
Case 14	LTE Band 7 Ant 1	Back	1.26	1.26	5mm	28.4	-62.8	0.13	146.1	2.59	0.03	Not required
	FR1 n77 Ant 5		0.83		5mm	-5.8	79.2	-1.24				
	WLAN5GHz Ant 6		0.375	1.33	5mm							
	Bluetooth Ant 6		0.121		5mm							
	LTE Band 7 Ant 1	Back	1.26	1.26	5mm	28.4	-62.8	0.13	155.3	2.59	0.03	Not required
	FR1 n77 Ant 5		0.83		5mm							
	WLAN5GHz Ant 6		0.375	1.33	5mm	-20.9	84.5	0.1				
	Bluetooth Ant 6		0.121		5mm							
	LTE Band 7 Ant 1	Back	1.26	1.26	5mm	28.4	-62.8	0.13	153.9	2.59	0.03	Not required
	FR1 n77 Ant 5		0.83		5mm							
	WLAN5GHz Ant 6		0.375	1.33	5mm							
	Bluetooth Ant 6		0.121		5mm	-35	77.4	-0.13				
Case 15	LTE Band 7 Ant 4	Back	0.904	0.904	5mm	16.1	90.2	0.29	165.1	2.37	0.02	Not required
	FR1 n26 Ant 0		1.091		5mm	-6.1	-73.4	0.05				
	WLAN2.4GHz Ant 6		0.37	5mm								
	LTE Band 7 Ant 4	Back	0.904	0.904	5mm				146.5	2.37	0.02	Not required
	FR1 n26 Ant 0		1.091		5mm	-6.1	-73.4	0.05				
	WLAN2.4GHz Ant 6		0.37	5mm	-25.3	71.8	0.26					
Case 16	LTE Band 7 Ant 4	Back	0.904	0.904	5mm	16.1	90.2	0.29	165.1	2.49	0.02	Not required
	FR1 n26 Ant 0		1.091		5mm	-6.1	-73.4	0.05				
	WLAN5GHz Ant 6		0.375	1.59	5mm							
	Bluetooth Ant 6		0.121		5mm							
	LTE Band 7 Ant 4	Back	0.904	0.904	5mm				158.6	2.49	0.02	Not required
	FR1 n26 Ant 0		1.091		5mm	-6.1	-73.4	0.05				
	WLAN5GHz Ant 6		0.375	1.59	5mm	-20.9	84.5	0.1				
	Bluetooth Ant 6		0.121		5mm							
	LTE Band 7 Ant 4	Back	0.904	0.904	5mm				153.5	2.49	0.03	Not required
	FR1 n26 Ant 0		1.091		5mm	-6.1	-73.4	0.05				
	WLAN5GHz Ant 6		0.375	1.59	5mm							
	Bluetooth Ant 6		0.121		5mm	-35	77.4	-0.13				



<Sensor off>

Case No	Band	Position	SAR 1g SAR (W/kg)	Summed	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
			1g SAR (W/kg)	1g SAR (W/kg)		X	Y	Z				
Case 40	LTE Band 7 Ant 1	Back	0.445	0.445	18mm	28.4	-62.8	0.13	146.1	1.68	0.01	Not required
	FR1 n77 Ant 5		0.534	1.23	18mm	-5.8	79.2	-1.24				
	WLAN5GHz Ant 6		0.578		18mm							
	Bluetooth Ant 6		0.121		18mm							
	LTE Band 7 Ant 1	Back	0.445	0.445	18mm	28.4	-62.8	0.13	155.3	1.68	0.01	Not required
	FR1 n77 Ant 5		0.534	18mm								
	WLAN5GHz Ant 6		0.578	18mm	-20.9	84.5	0.1					
	Bluetooth Ant 6		0.121	18mm								
	LTE Band 7 Ant 1	Back	0.445	0.445	18mm	28.4	-62.8	0.13	153.9	1.68	0.01	Not required
	FR1 n77 Ant 5		0.534	18mm								
	WLAN5GHz Ant 6		0.578	18mm								
	Bluetooth Ant 6		0.121	18mm	-35	77.4	-0.13					

<For Extremity>

Case No	Band	Position	SAR 10g SAR (W/kg)	Summed	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
			10g SAR (W/kg)	10g SAR (W/kg)		X	Y	Z				
Case 31	LTE Band 5 Ant 0	Back	1.304	1.304	0mm	-9.3	-78.3	-0.02	167.8	4.84	0.06	Not required
	FR1 n41 Ant 4		2.675	3.53	0mm	20.8	86.8	0.33				
	WLAN2.4GHz Ant 6		0.847		0mm							
	NFC		0.012		0mm							
	LTE Band 5 Ant 0	Back	1.304	1.304	0mm	-9.3	-78.3	-0.02	151.0	4.84	0.07	Not required
	FR1 n41 Ant 4		2.675	0mm								
	WLAN2.4GHz Ant 6		0.847	0mm	-25.3	71.8	0.26					
	NFC		0.012	0mm								
	LTE Band 5 Ant 0	Back	1.304	1.304	0mm	-9.3	-78.3	-0.02	112.2	4.84	0.09	Not required
	FR1 n41 Ant 4		2.675	0mm								
	WLAN2.4GHz Ant 6		0.847	0mm								
	NFC		0.012	0mm	-2	33.6	-3.32					
Case No	Band	Position	SAR 10g SAR (W/kg)	Summed	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
Case 32	LTE Band 5 Ant 0	Back	1.304	1.304	0mm	-9.3	-78.3	-0.02	167.8	4.74	0.06	Not required
	FR1 n41 Ant 4		2.675	3.43	0mm	20.8	86.8	0.33				
	WLAN5GHz Ant 6		0.746		0mm							
	Bluetooth Ant 6		0		0mm							
	NFC		0.012		0mm							
	LTE Band 5 Ant 0	Back	1.304	1.304	0mm	-9.3	-78.3	-0.02	163.2	4.74	0.06	Not required
	FR1 n41 Ant 4		2.675	0mm								
	WLAN5GHz Ant 6		0.746	0mm	-20.9	84.5	0.1					
	Bluetooth Ant 6		0	0mm								
	NFC		0.012	0mm								
	LTE Band 5 Ant 0	Back	1.304	1.304	0mm	-9.3	-78.3	-0.02	157.8	4.74	0.07	Not required
	FR1 n41 Ant 4		2.675	0mm								
WLAN5GHz Ant 6	0.746		0mm									
Bluetooth Ant 6	0		0mm	-35	77.4	-0.13						
NFC	0.012		0mm									
LTE Band 5 Ant 0	Back	1.304	1.304	0mm	-9.3	-78.3	-0.02	112.2	4.74	0.09	Not required	
FR1 n41 Ant 4		2.675	0mm									
WLAN5GHz Ant 6		0.746	0mm									
Bluetooth Ant 6		0	0mm									
NFC		0.012	0mm	-2	33.6	-3.32						



Case No	Band	Position	SAR 10g SAR (W/kg)	Summed	Gap	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				10g SAR (W/kg)	(mm)	X	Y	Z				
Case 33	LTE Band 7 Ant 1	Back	2.52	2.52	0mm	28.4	-62.8	0.13	146.1	4.20	0.06	Not required
	FR1 n77 Ant 5		0.823		0mm	-5.8	79.2	-1.24				
	WLAN2.4GHz Ant 6		0.847		0mm							
	NFC		0.012		0mm							
	LTE Band 7 Ant 1	Back	2.52	2.52	0mm	28.4	-62.8	0.13	144.9	4.20	0.06	Not required
	FR1 n77 Ant 5		0.823		0mm							
	WLAN2.4GHz Ant 6		0.847		0mm	-25.3	71.8	0.26				
	NFC		0.012		0mm							
	LTE Band 7 Ant 1	Back	2.52	2.52	0mm	28.4	-62.8	0.13	101.1	4.20	0.09	Not required
	FR1 n77 Ant 5		0.823		0mm							
	WLAN2.4GHz Ant 6		0.847		0mm							
	NFC		0.012		0mm	-2	33.6	-3.32				
Case No	Band	Position	SAR 10g SAR (W/kg)	Summed 10g SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
Case 34	LTE Band 7 Ant 1	Back	2.52	2.52	0mm	28.4	-62.8	0.13	146.1	4.10	0.06	Not required
	FR1 n77 Ant 5		0.823		0mm	-5.8	79.2	-1.24				
	WLAN5GHz Ant 6		0.746		0mm							
	Bluetooth Ant 6		0		0mm							
	NFC		0.012		0mm							
	LTE Band 7 Ant 1	Back	2.52	2.52	0mm	28.4	-62.8	0.13	155.3	4.10	0.05	Not required
	FR1 n77 Ant 5		0.823		0mm							
	WLAN5GHz Ant 6		0.746		0mm	-20.9	84.5	0.1				
	Bluetooth Ant 6		0		0mm							
	NFC		0.012		0mm							
	LTE Band 7 Ant 1	Back	2.52	2.52	0mm	28.4	-62.8	0.13	153.9	4.10	0.05	Not required
	FR1 n77 Ant 5		0.823		0mm							
	WLAN5GHz Ant 6		0.746		0mm							
	Bluetooth Ant 6		0		0mm	-35	77.4	-0.13				
	NFC		0.012		0mm							
	LTE Band 7 Ant 1	Back	2.52	2.52	0mm	28.4	-62.8	0.13	101.1	4.10	0.08	Not required
FR1 n77 Ant 5	0.823		0mm									
WLAN5GHz Ant 6	0.746		0mm									
Bluetooth Ant 6	0		0mm									
NFC	0.012		0mm		-2	33.6	-3.32					

Test Engineer : Martin Li, Varus Wang, Light Wang, Ricky Gu



18. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

19. References

- [1] FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
- [2] ANSI/IEEE Std. C95.1-1992, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”, September 1992
- [3] IEEE Std. 1528-2013, “IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [6] FCC KDB 865664 D02 v01r02, “RF Exposure Compliance Reporting and Documentation Considerations” Oct 2015.
- [7] FCC KDB 648474 D04 v01r03, “SAR Evaluation Considerations for Wireless Handsets”, Oct 2015.
- [8] FCC KDB 248227 D01 v02r02, “SAR Guidance for IEEE 802.11 (WiFi) Transmitters”, Oct 2015.
- [9] FCC KDB 616217 D04 v01r02, “SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers”, Oct 2015
- [10] FCC KDB 941225 D01 v03r01, “3G SAR MEAUREMENT PROCEDURES”, Oct 2015
- [11] FCC KDB 941225 D05 v02r05, “SAR Evaluation Considerations for LTE Devices”, Dec 2015
- [12] FCC KDB 941225 D05A v01r02, “Rel. 10 LTE SAR Test Guidance and KDB Inquiries”, Oct 2015
- [13] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [14] FCC KDB 447498 D01 v06, “Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies”, Oct 2015
- [15] FCC KDB 484596 D01 v02r03, “Test Reductions Via Data Referencing”, Mar. 2024

-----THE END-----