



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2521-2
FCC ID : IHDT56AT1
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Sep. 21, 2024 ~ Sep. 26, 2024

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test..... 5

 1.4 Product Specification of Equipment Under Test..... 6

 1.5 Modification of EUT 6

 1.6 Testing Location 6

 1.7 Test Software..... 7

 1.8 Applicable Standards..... 7

 1.9 Specification of Accessory..... 8

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 9

 2.1 Carrier Frequency and Channel 9

 2.2 Test Mode 9

 2.3 Connection Diagram of Test System 10

 2.4 Support Unit used in test configuration and system 11

 2.5 EUT Operation Test Setup 11

 2.6 Measurement Results Explanation Example..... 11

3 TEST RESULT 12

 3.1 6dB and 99% Bandwidth Measurement 12

 3.2 Output Power Measurement..... 14

 3.3 Power Spectral Density Measurement 15

 3.4 Conducted Band Edges and Spurious Emission Measurement 17

 3.5 Radiated Band Edges and Spurious Emission Measurement 30

 3.6 AC Conducted Emission Measurement..... 34

 3.7 Antenna Requirements 36

4 LIST OF MEASURING EQUIPMENT 37

5 MEASUREMENT UNCERTAINTY 38

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. DUTY CYCLE PLOTS

APPENDIX E. SETUP PHOTOGRAPHS



REVISION HISTORY

| REPORT NO. | VERSION | DESCRIPTION | ISSUED DATE |
|------------|---------|-------------------------|---------------|
| FR482104C | Rev. 01 | Initial issue of report | Oct. 19, 2024 |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |



SUMMARY OF TEST RESULT

| Report Section | FCC Rule | Description | Limit | Result | Remark |
|----------------|--------------------|--|-----------------------|-------------|------------------------------------|
| 3.1 | 15.247(a)(2) | 6dB Bandwidth | ≥ 0.5MHz | Pass | - |
| 3.1 | - | 99% Bandwidth | - | Report Only | - |
| 3.2 | 15.247(b) | Power Output Measurement | ≤ 30dBm | Pass | - |
| 3.3 | 15.247(e) | Power Spectral Density | ≤ 8dBm/3kHz | Pass | - |
| 3.4 | 15.247(d) | Conducted Band Edges | ≤ 20dBc | Pass | - |
| | | Conducted Spurious Emission | | Pass | - |
| 3.5 | 15.247(d) | Radiated Band Edges and Radiated Spurious Emission | 15.209(a) & 15.247(d) | Pass | Under limit 3.36 dB at 2483.51 MHz |
| 3.6 | 15.207 | AC Conducted Emission | 15.207(a) | Pass | Under limit 8.63 dB at 9.65 MHz |
| 3.7 | 15.203 & 15.247(b) | Antenna Requirement | 15.203 & 15.247(b) | Pass | - |

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W, Merchandise Mart Plaza, Chicago IL 60654, USA

1.2 Manufacturer

Motorola Mobility LLC
222 W, Merchandise Mart Plaza, Chicago IL 60654, USA

1.3 Product Feature of Equipment Under Test

| Product Feature | |
|-----------------|---|
| Equipment | Mobile Cellular Phone |
| Brand Name | Motorola |
| Model Name | XT2521-2 |
| FCC ID | IHDT56AT1 |
| IMEI Code | Conducted: 355811120032355/355811120032363 for sample 1 Conduction: 355811120027892/355811120027900 for sample 1 Radiation: 355811120027835/355811120027843 for sample 1 356072250003331 for sample 2 355811120041091 for sample 3 |
| HW Version | DVT2 |
| SW Version | VVTA35.44 |
| EUT Stage | Identical Prototype |

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are three type of EUT, the differences could be referred to the XT2521-2_Operational Description of Product Equality Declaration which is exhibit separately. According to the difference, we chose sample 1 to perform full test and the sample 2/3 is verified for the difference.



1.4 Product Specification of Equipment Under Test

| Standards-related Product Specification | |
|---|--|
| Tx/Rx Channel Frequency Range | 2412 MHz ~ 2462 MHz |
| Maximum (Peak) Output Power to antenna | 802.11b : 21.49 dBm (0.1409 W) 802.11g : 25.84 dBm (0.3837 W) 802.11n HT20 : 25.96 dBm (0.3945 W) 802.11n HT40 : 25.02 dBm (0.3177 W) |
| 99% Occupied Bandwidth | 802.11b : 13.00MHz 802.11g : 17.01MHz 802.11n HT20 : 18.04MHz 802.11n HT40 : 36.73MHz |
| Antenna Type / Gain | PIFA Antenna type with gain -4.5 dBi |
| Type of Modulation | 802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) |

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

| | | | |
|---------------------------|---|----------------------------|---------------------------------------|
| Test Firm | Sporton International Inc. (ShenZhen) | | |
| Test Site Location | 1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595 | | |
| Test Site No. | Sporton Site No. | FCC Designation No. | FCC Test Firm Registration No. |
| | TH01-SZ | CN1256 | 421272 |

| | | | |
|---------------------------|---|----------------------------|---------------------------------------|
| Test Firm | Sporton International Inc. (ShenZhen) | | |
| Test Site Location | 101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985 | | |
| Test Site No. | Sporton Site No. | FCC Designation No. | FCC Test Firm Registration No. |
| | CO02-SZ ; 03CH03-SZ | CN1256 | 421272 |



1.7 Test Software

| Item | Site | Manufacturer | Name | Version |
|------|-----------|--------------|------|-------------|
| 1. | 03CH03-SZ | AUDIX | E3 | 6.2009-8-24 |

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



1.9 Specification of Accessory

| Specification of Accessory | | | | |
|----------------------------|------------|---------------------|------------|---|
| AC Adapter 1(US) | Brand Name | Motorola(AOHAI) | Model Name | MC-201L |
| AC Adapter 1(EU) | Brand Name | Motorola(AOHAI) | Model Name | MC-202L |
| AC Adapter 1(UK) | Brand Name | Motorola(AOHAI) | Model Name | MC-203L |
| AC Adapter 1(IN) | Brand Name | Motorola(AOHAI) | Model Name | MC-204 |
| AC Adapter 1(AU) | Brand Name | Motorola(AOHAI) | Model Name | MC-205L |
| AC Adapter 1(AR) | Brand Name | Motorola(AOHAI) | Model Name | MC-206L |
| AC Adapter 1(PRC) | Brand Name | Motorola(AOHAI) | Model Name | MC-208L |
| AC Adapter 2(US) | Brand Name | Motorola(SALCOMP) | Model Name | MC-201L |
| AC Adapter 2(EU) | Brand Name | Motorola(SALCOMP) | Model Name | MC-202L |
| AC Adapter 2(UK) | Brand Name | Motorola(SALCOMP) | Model Name | MC-203L |
| AC Adapter 2(AU) | Brand Name | Motorola(SALCOMP) | Model Name | MC-205L |
| AC Adapter 2(AR) | Brand Name | Motorola(SALCOMP) | Model Name | MC-206L |
| AC Adapter 2(BR) | Brand Name | Motorola(SALCOMP) | Model Name | MC-207L |
| AC Adapter 2(PRC) | Brand Name | Motorola(SALCOMP) | Model Name | MC-208L |
| AC Adapter 2(CHILE) | Brand Name | Motorola(SALCOMP) | Model Name | MC-209L |
| AC Adapter 3(US) | Brand Name | Motorola(CHENYANG) | Model Name | MC-201L |
| AC Adapter 3(EU) | Brand Name | Motorola(CHENYANG) | Model Name | MC-202L |
| AC Adapter 3(AR) | Brand Name | Motorola(CHENYANG) | Model Name | MC-206L |
| AC Adapter 3(BR) | Brand Name | Motorola(CHENYANG) | Model Name | MC-207L |
| Battery 1 | Brand Name | Motorola(ATL) | Model Name | RL52 |
| Battery 2 | Brand Name | Motorola(Jiade) | Model Name | RL52 |
| Battery 3 | Brand Name | Motorola(COSMX) | Model Name | RL52 |
| USB Cable 1 | Brand Name | Motorola(Yihuaxing) | Model Name | T365-020 T365-020-01 T365-020-02 |
| USB Cable 2 | Brand Name | Motorola(WASHIN) | Model Name | HX-TL-01 HX-TL-08 HX-TL-07 |
| USB Cable 3 | Brand Name | Motorola(Juwei) | Model Name | JWUB1614-T03H JWUB1705-T03H JWUB1856-T03H |
| USB Cable 4 | Brand Name | Motorola(I-SHENG) | Model Name | SC18D38574 |



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

| Frequency Band | Channel | Freq. (MHz) | Channel | Freq. (MHz) |
|-----------------|---------|-------------|---------|-------------|
| 2400-2483.5 MHz | 1 | 2412 | 7 | 2442 |
| | 2 | 2417 | 8 | 2447 |
| | 3 | 2422 | 9 | 2452 |
| | 4 | 2427 | 10 | 2457 |
| | 5 | 2432 | 11 | 2462 |
| | 6 | 2437 | - | - |

2.2 Test Mode


Final test modes are considering the modulation and worse data rates as below table.

| Test Cases | |
|---|---|
| AC Conducted Emission | Mode 1 :GSM 850 Idle + WLAN Link(2.4G) + NFC TX + USB Cable1 (Charging from Adapter1) + Battery1 + Earphone 1 |
| Remark: For Radiated Test Cases, The tests were performance with Adapter1, Earphone1 and USB Cable1. | |


| RSE Co-location |
|--|
| 802.11n HT20 CH11_TX + LTE Band13 Link |

2.3 Connection Diagram of Test System

AC Conducted Emission:

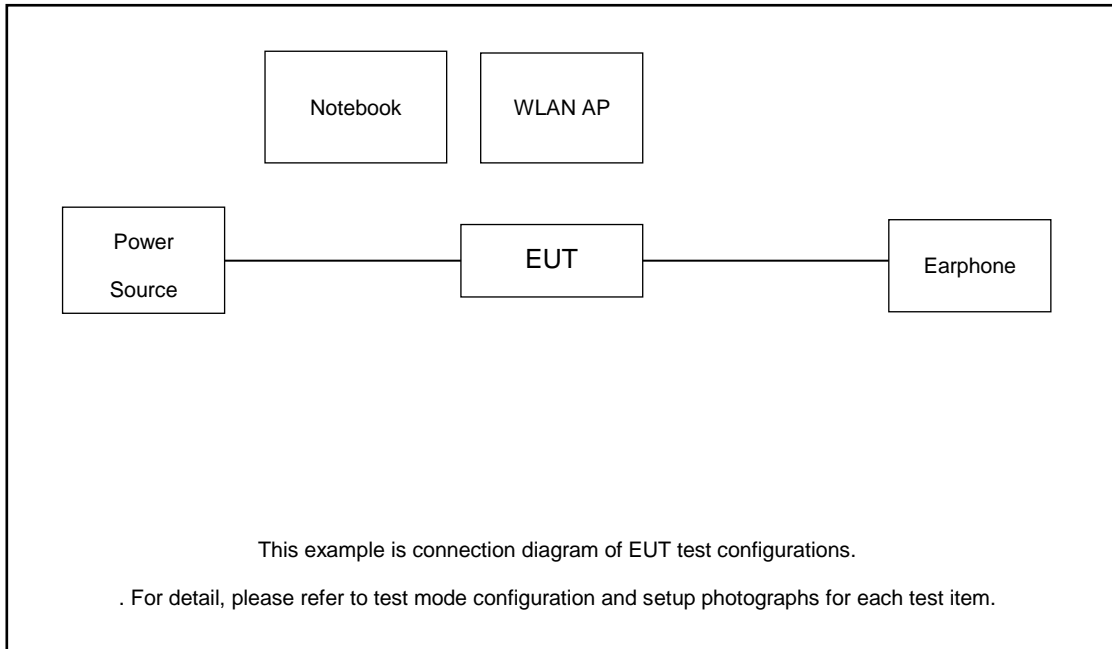

Radiated Emission:

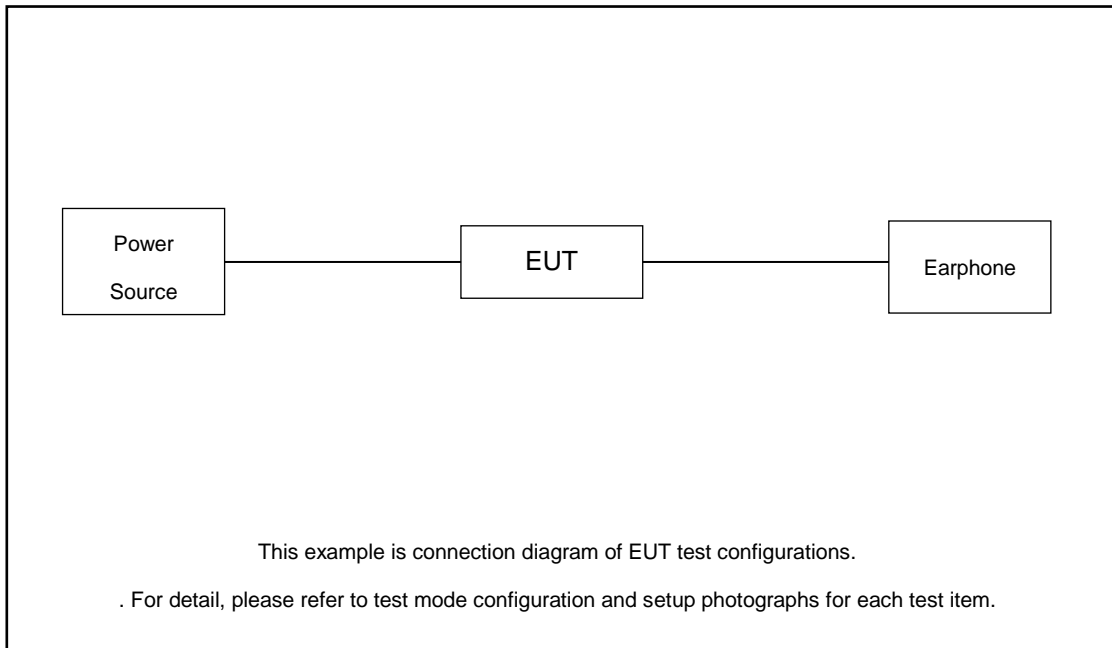



2.4 Support Unit used in test configuration and system

| Item | Equipment | Trade Name | Model Name | FCC ID | Data Cable | Power Cord |
|------|-------------------|------------|------------|-------------|------------|--|
| 1. | Base Station(LTE) | Anritsu | MT8820C | N/A | N/A | Unshielded, 1.8m |
| 2. | NOTE BOOK | Lenovo | E540 | FCC DoC | N/A | AC I/P : Unshielded, 1.2m DC O/P : Shielded, 1.8m |
| 3. | WLAN AP | Dlink | DIR-820L | KA2IR820LA1 | N/A | Unshielded, 1.8m |
| 4. | Earphone | N/A | N/A | N/A | N/A | N/A |

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

$$\text{Offset} = \text{RF cable loss} + \text{attenuator factor}.$$

Following shows an offset computation example with cable loss 1.3 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset}(dB) &= \text{RF cable loss}(dB) + \text{attenuator factor}(dB). \\ &= 1.3 + 10 = 11.3 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) $\geq 3 \times$ RBW. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1%~5% of OBW and set the Video bandwidth (VBW) approximately three times the RBW.
6. Measure and record the results in the test report.


3.1.4 Test Setup





3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

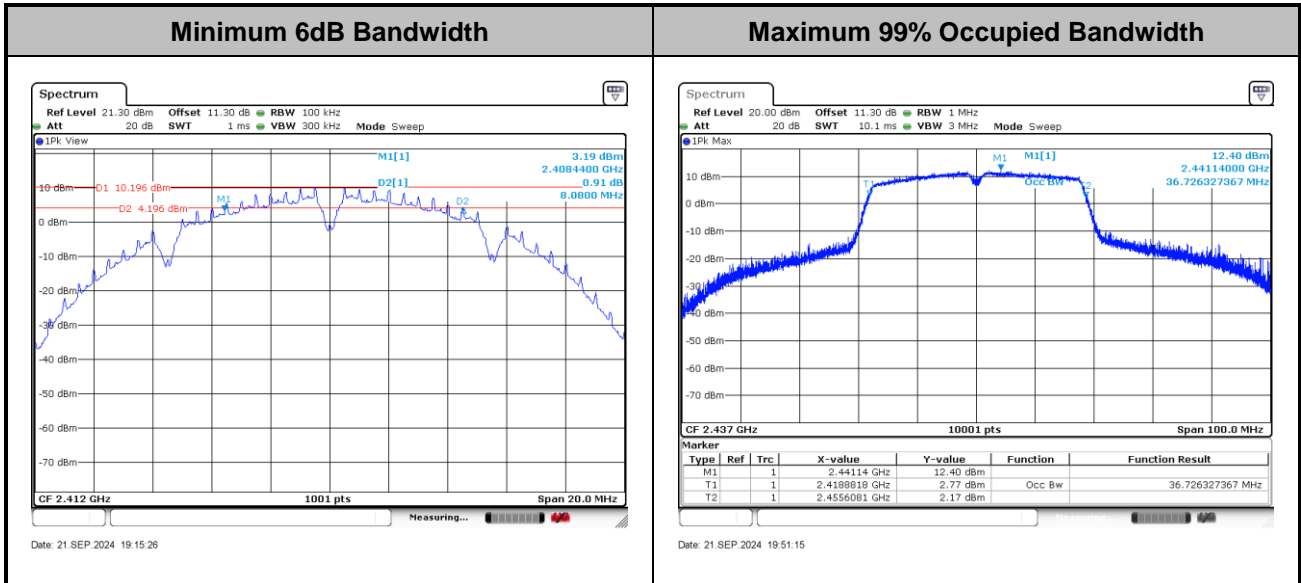

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

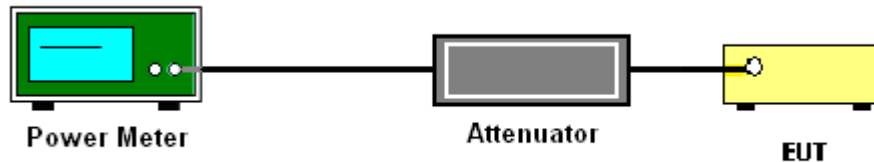

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures


1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

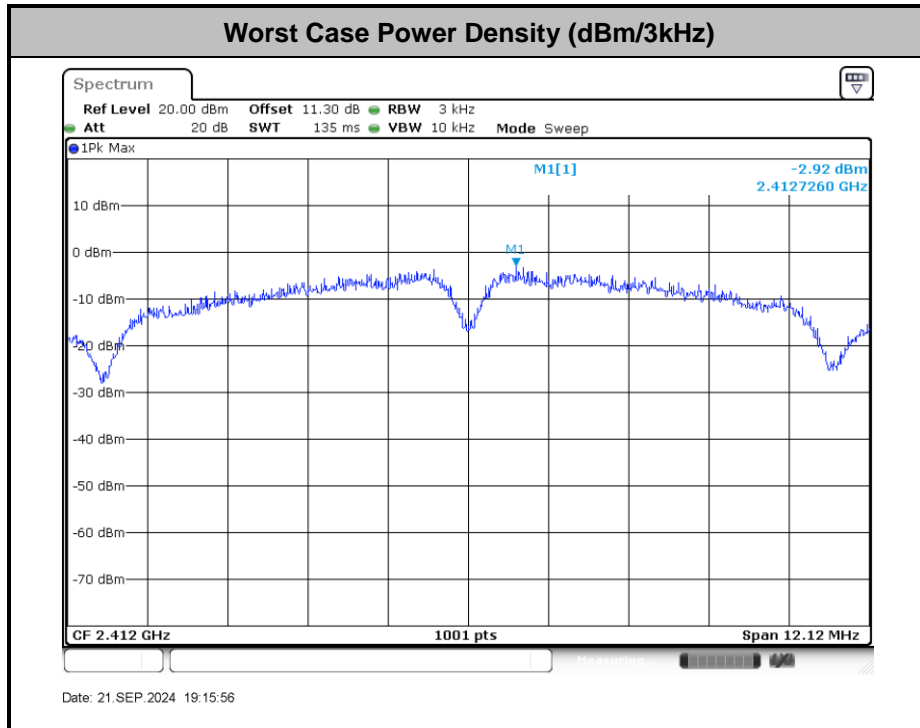

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.11
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

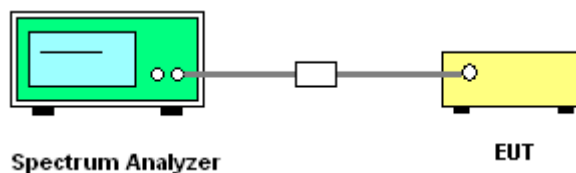




3.4.5 Test Result of Conducted Band Edges and Spurious Emission



| | | |
|---------------------------|---------------------|---------|
| Test Engineer : Sam Zheng | Temperature : | 24~26°C |
| | Relative Humidity : | 50~53% |

| | | | |
|-------------|---------|----------------|----|
| Test Mode : | 802.11b | Test Channel : | 01 |
|-------------|---------|----------------|----|

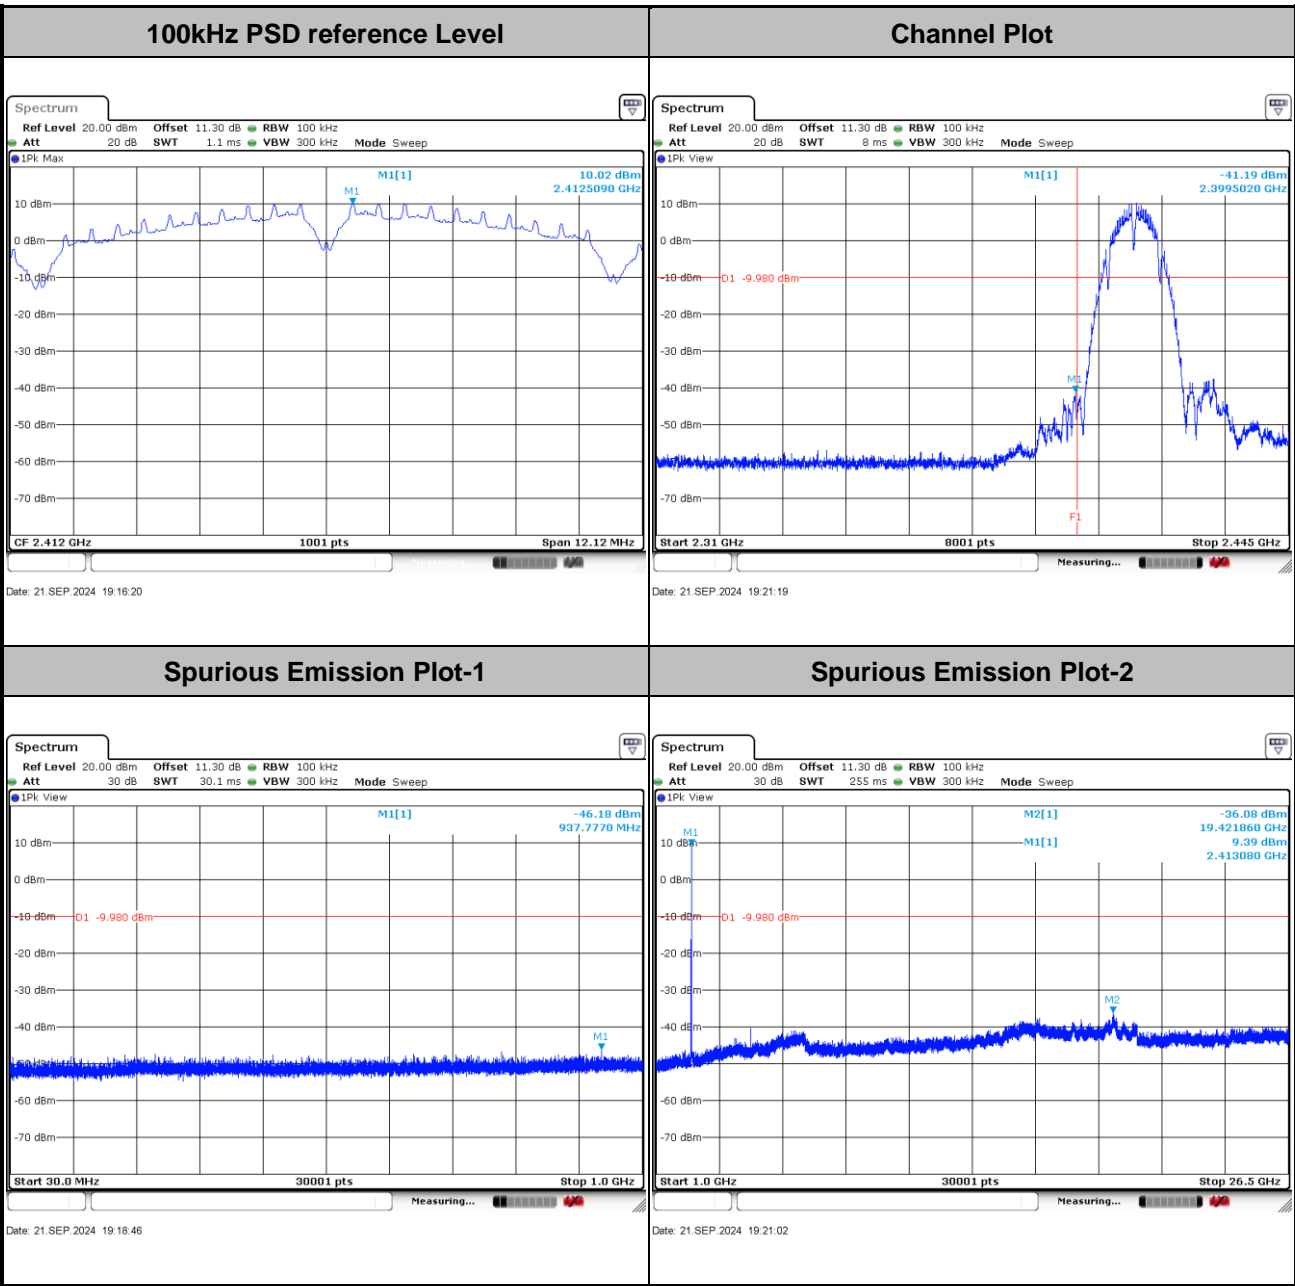





| | | | |
|-------------|---------|----------------|----|
| Test Mode : | 802.11b | Test Channel : | 06 |
|-------------|---------|----------------|----|

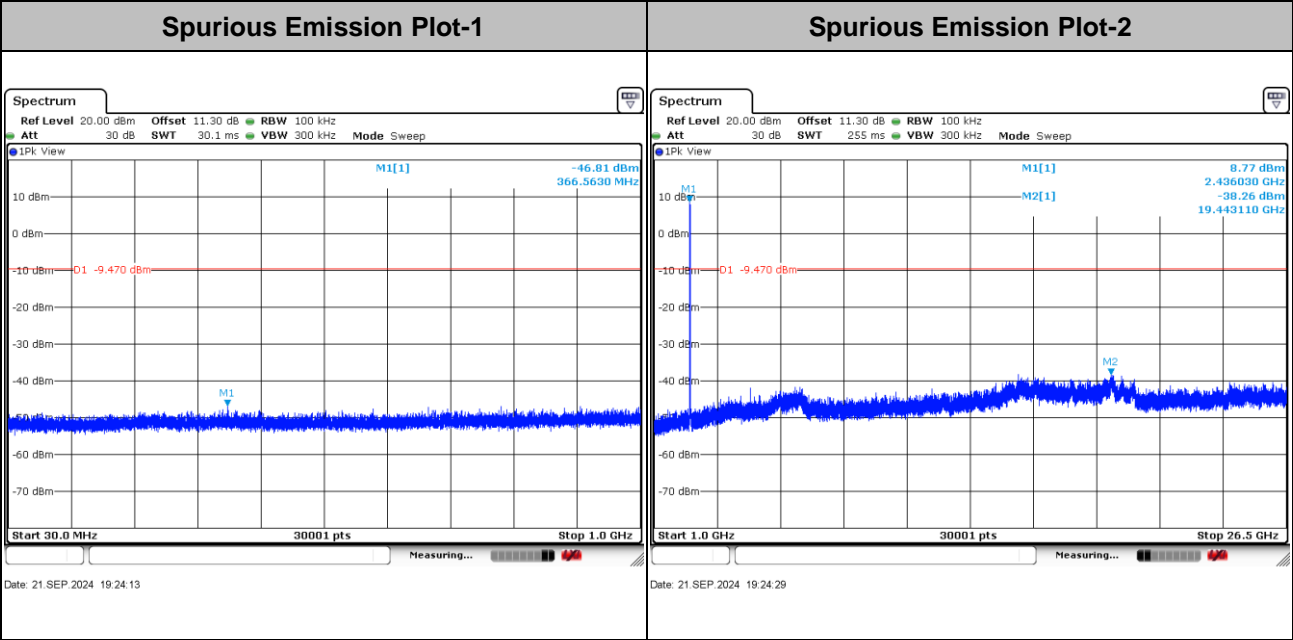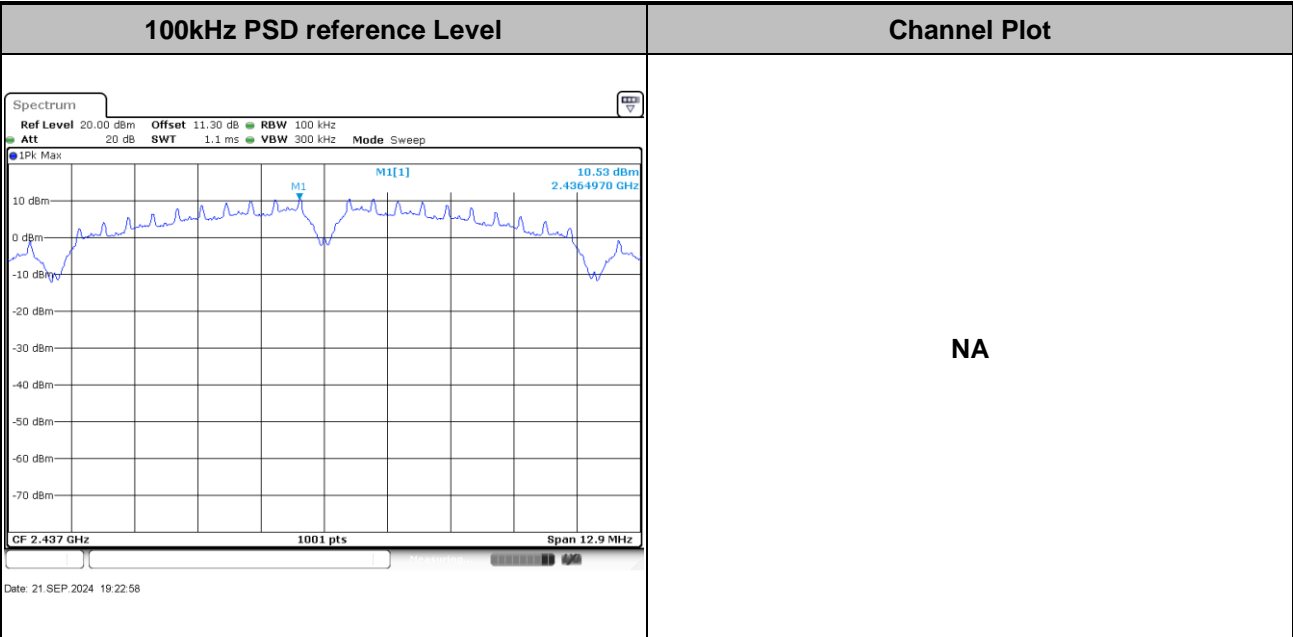




| | | | |
|-------------|---------|----------------|----|
| Test Mode : | 802.11b | Test Channel : | 11 |
|-------------|---------|----------------|----|

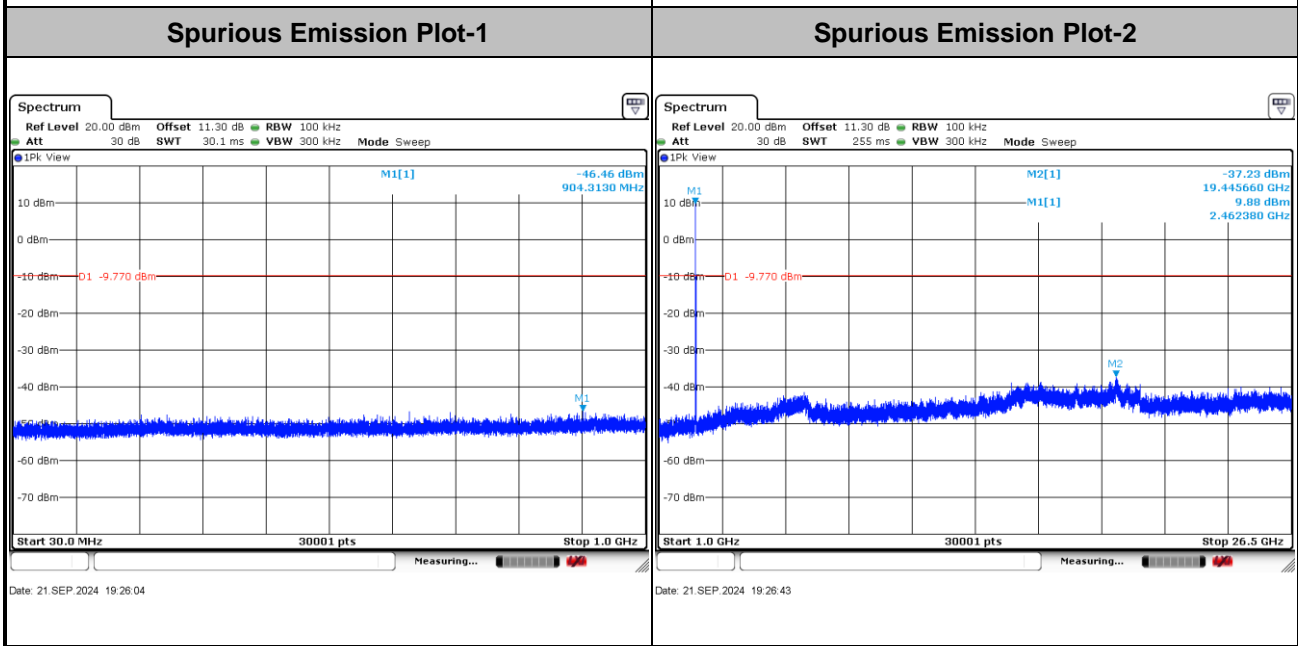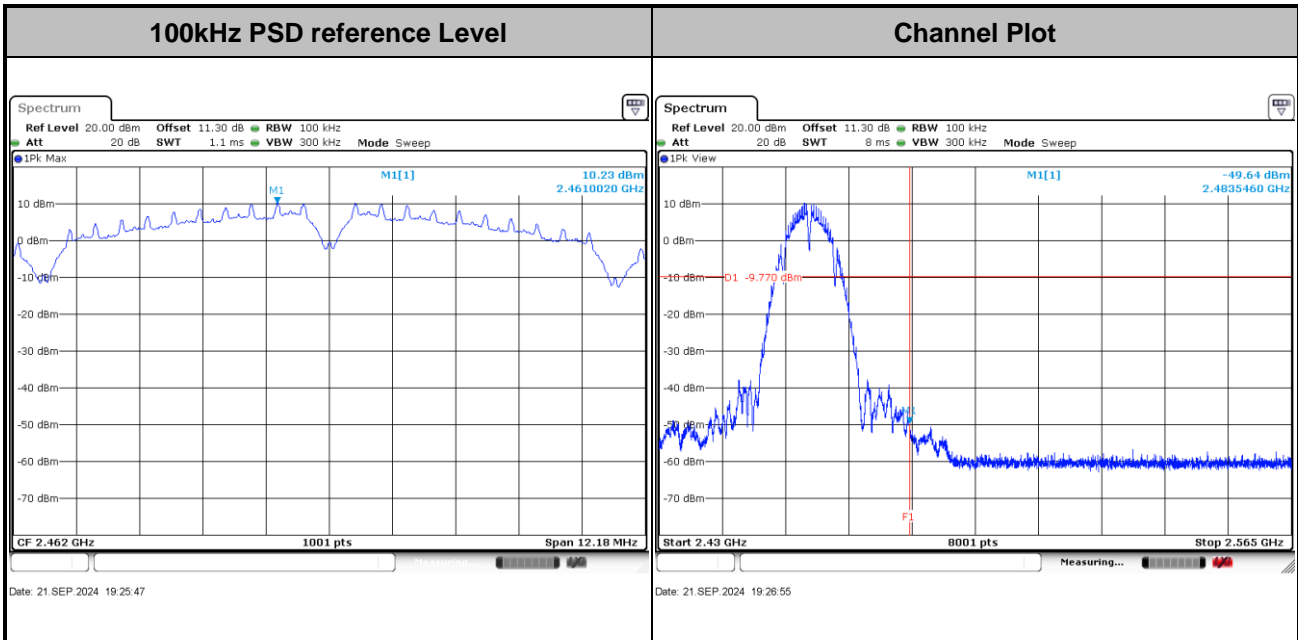





| | | | |
|-------------|---------|----------------|----|
| Test Mode : | 802.11g | Test Channel : | 01 |
|-------------|---------|----------------|----|

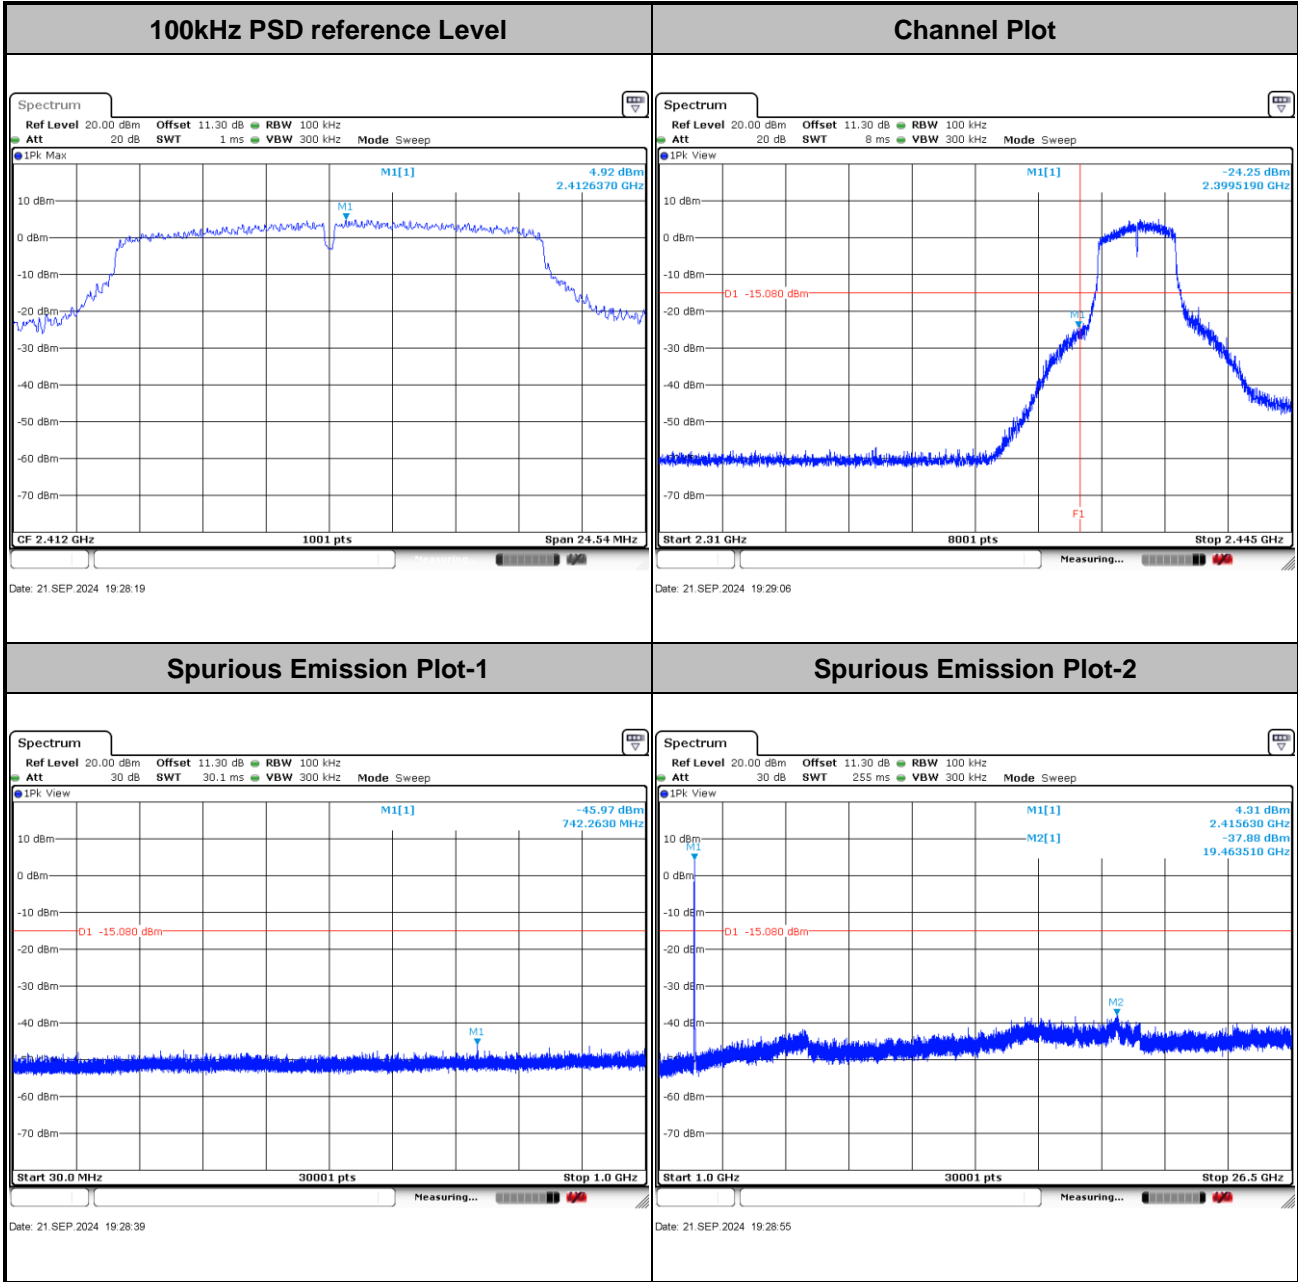





| | | | |
|-------------|---------|----------------|----|
| Test Mode : | 802.11g | Test Channel : | 06 |
|-------------|---------|----------------|----|

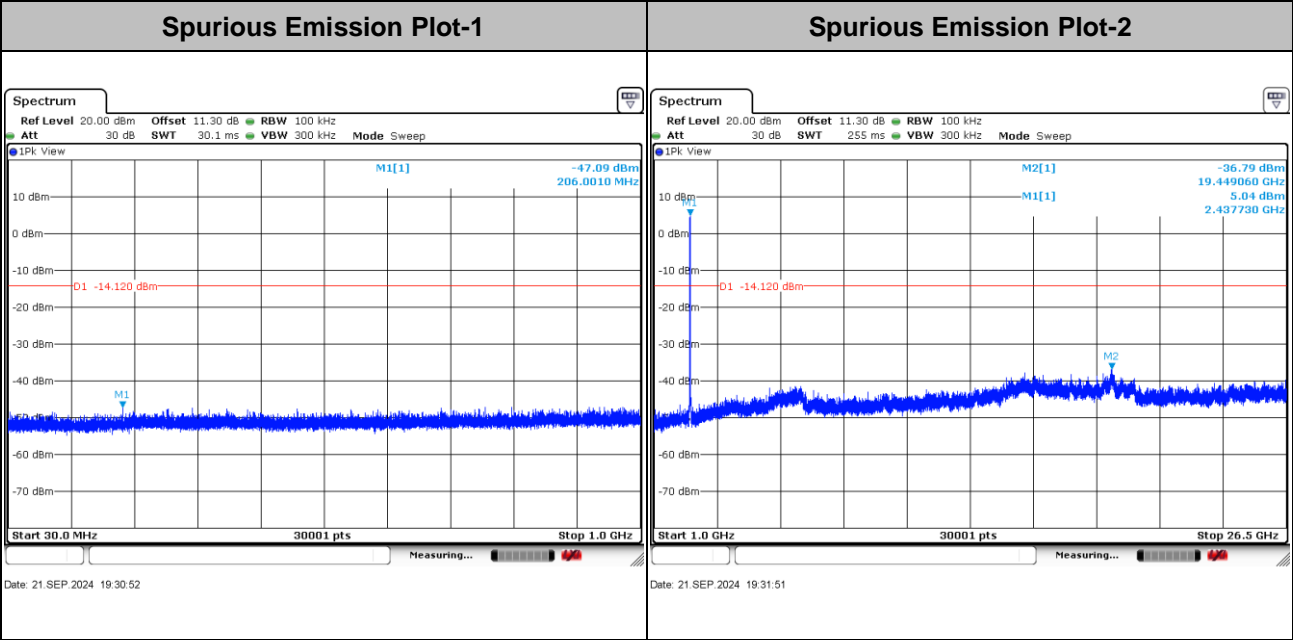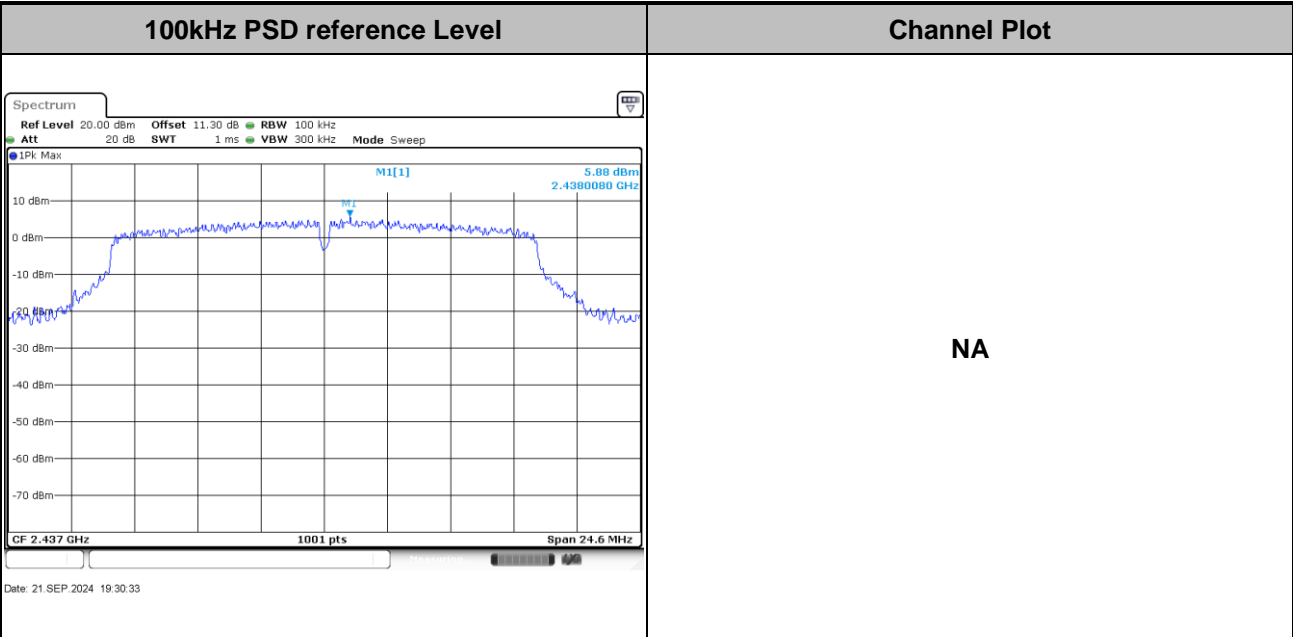





| | | | |
|-------------|---------|----------------|----|
| Test Mode : | 802.11g | Test Channel : | 11 |
|-------------|---------|----------------|----|

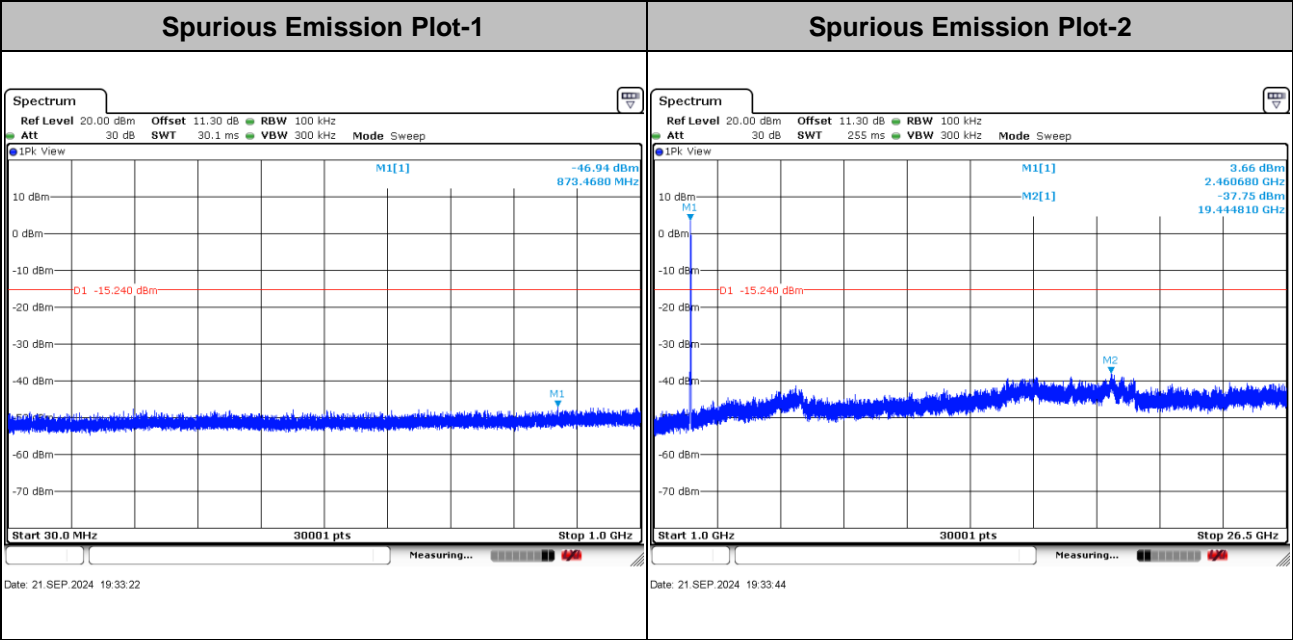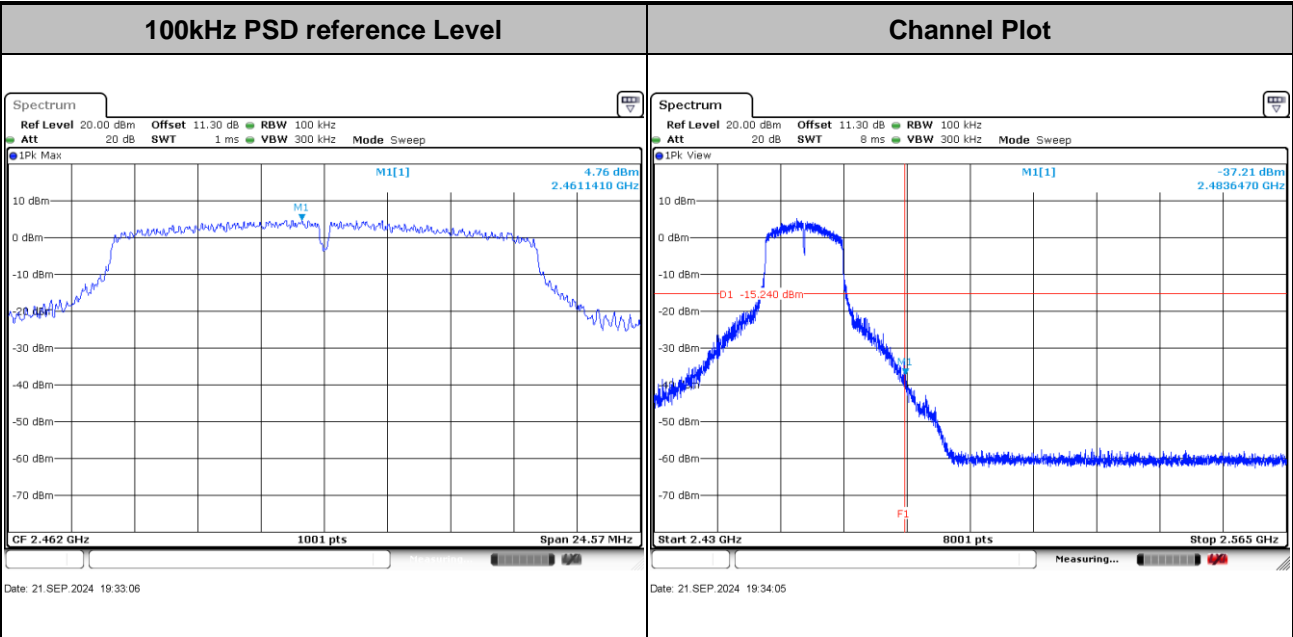





| | |
|---------------------------------|--------------------------|
| Test Mode : 802.11n HT20 | Test Channel : 01 |
|---------------------------------|--------------------------|

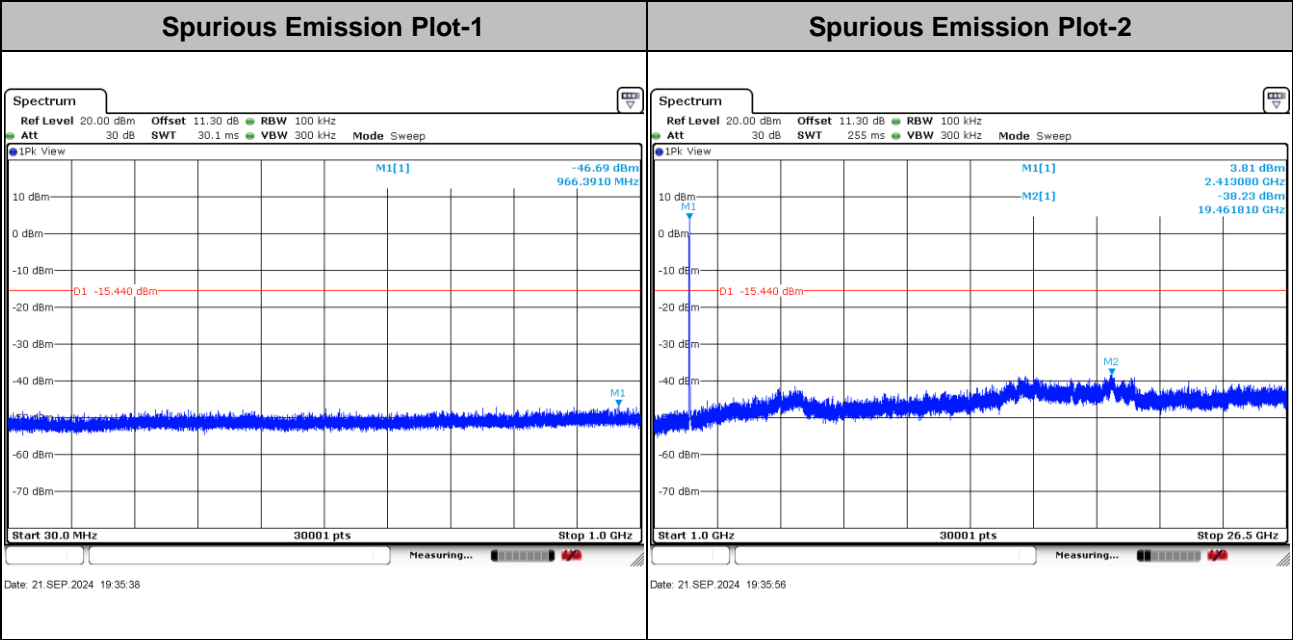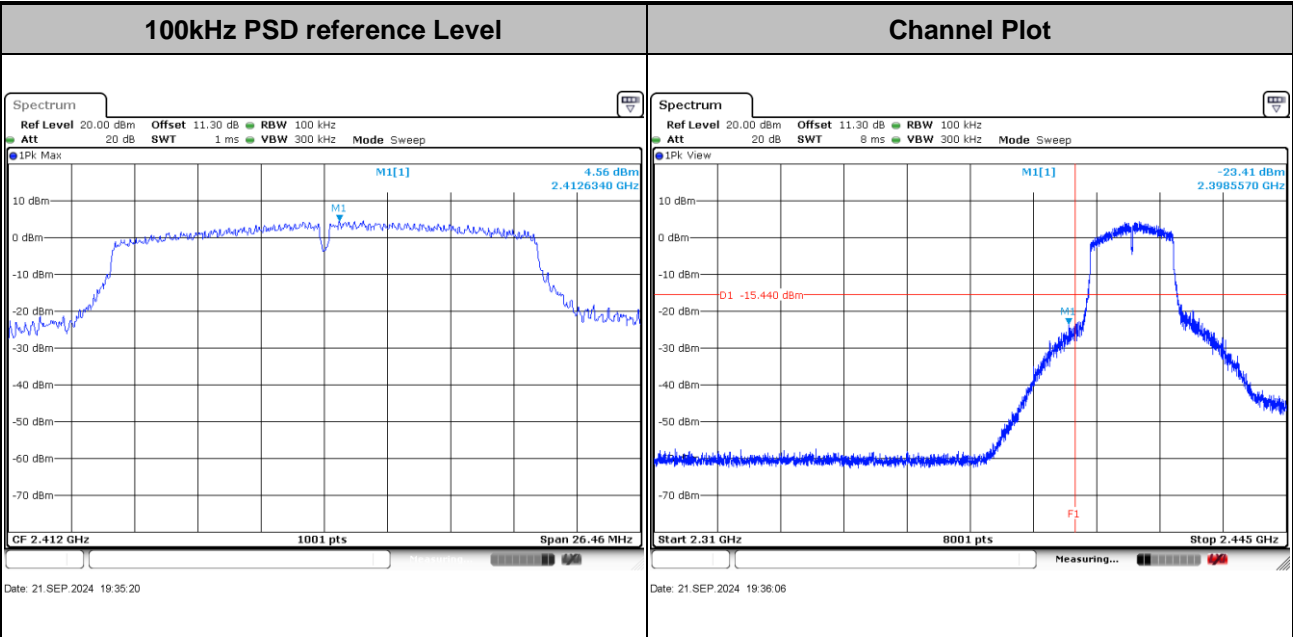





| | | | |
|-------------|--------------|----------------|----|
| Test Mode : | 802.11n HT20 | Test Channel : | 06 |
|-------------|--------------|----------------|----|

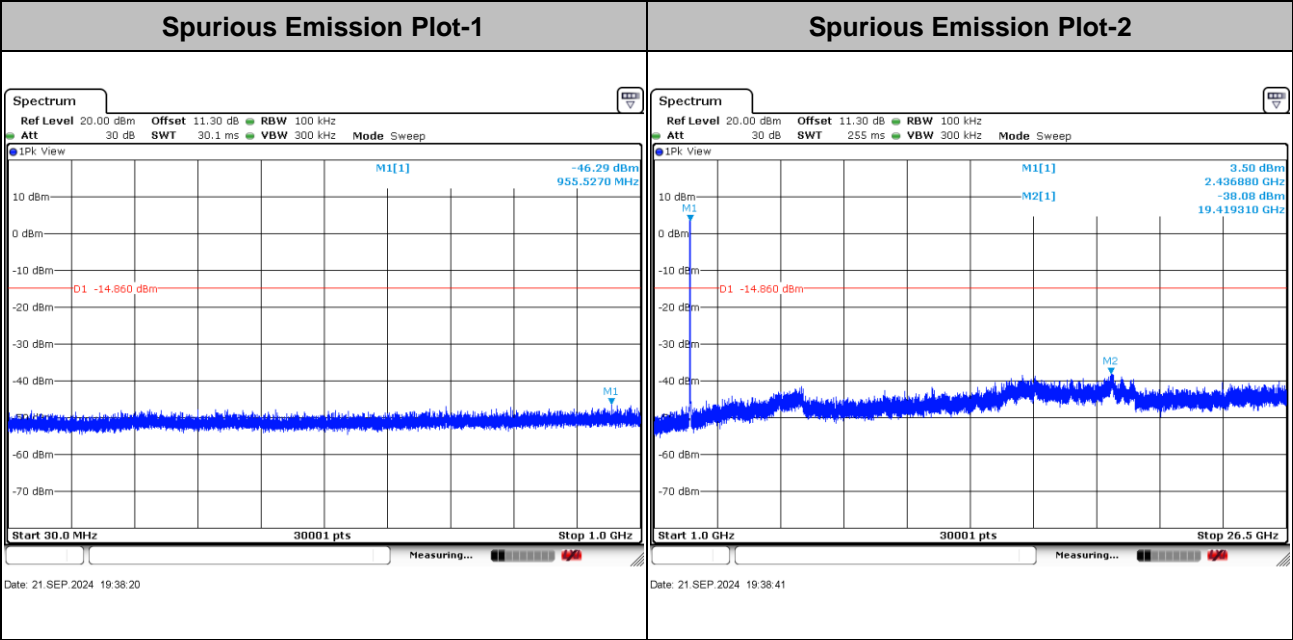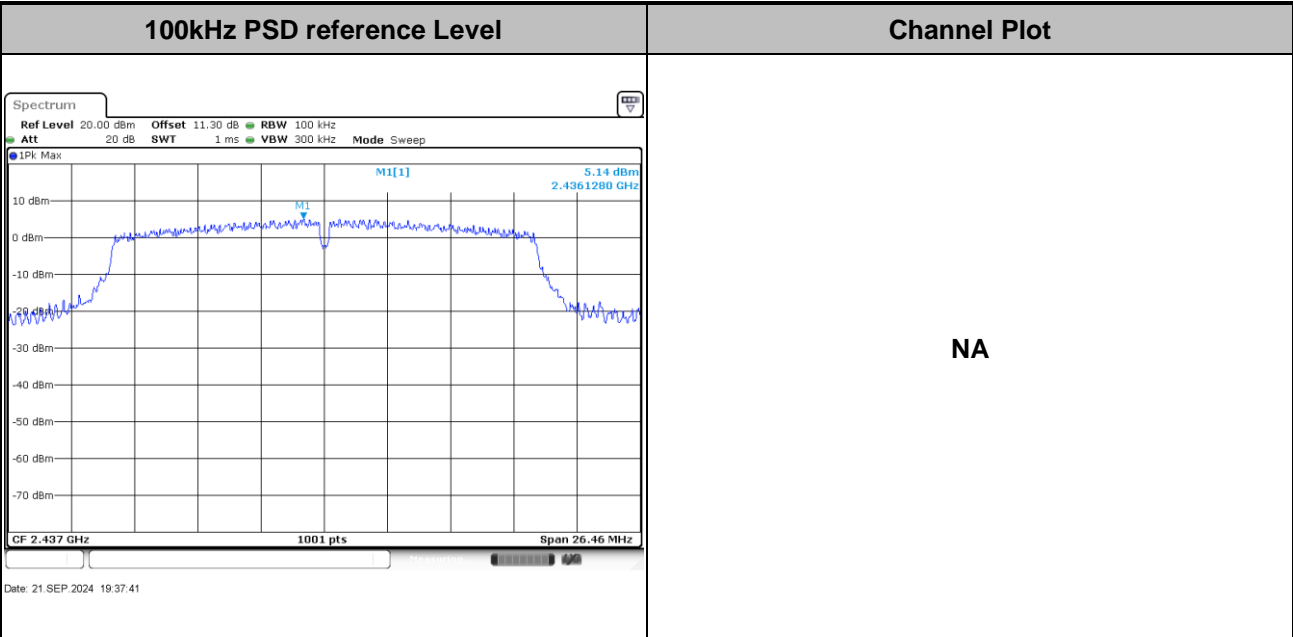





| | | | |
|-------------|--------------|----------------|----|
| Test Mode : | 802.11n HT20 | Test Channel : | 11 |
|-------------|--------------|----------------|----|

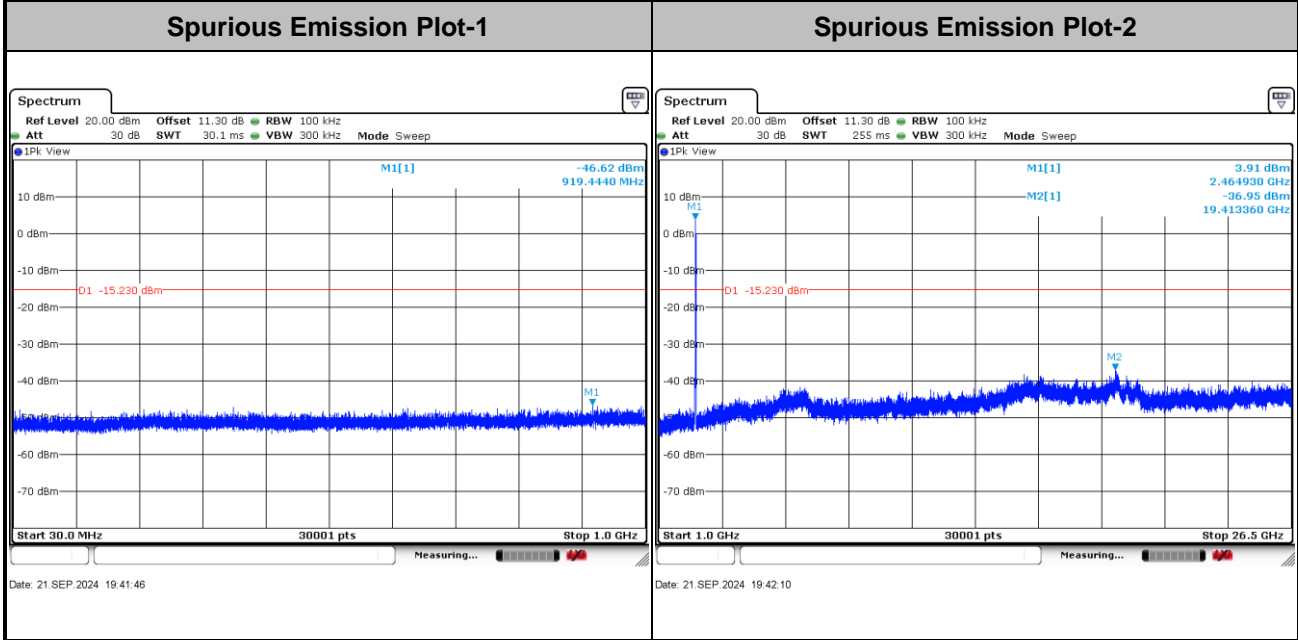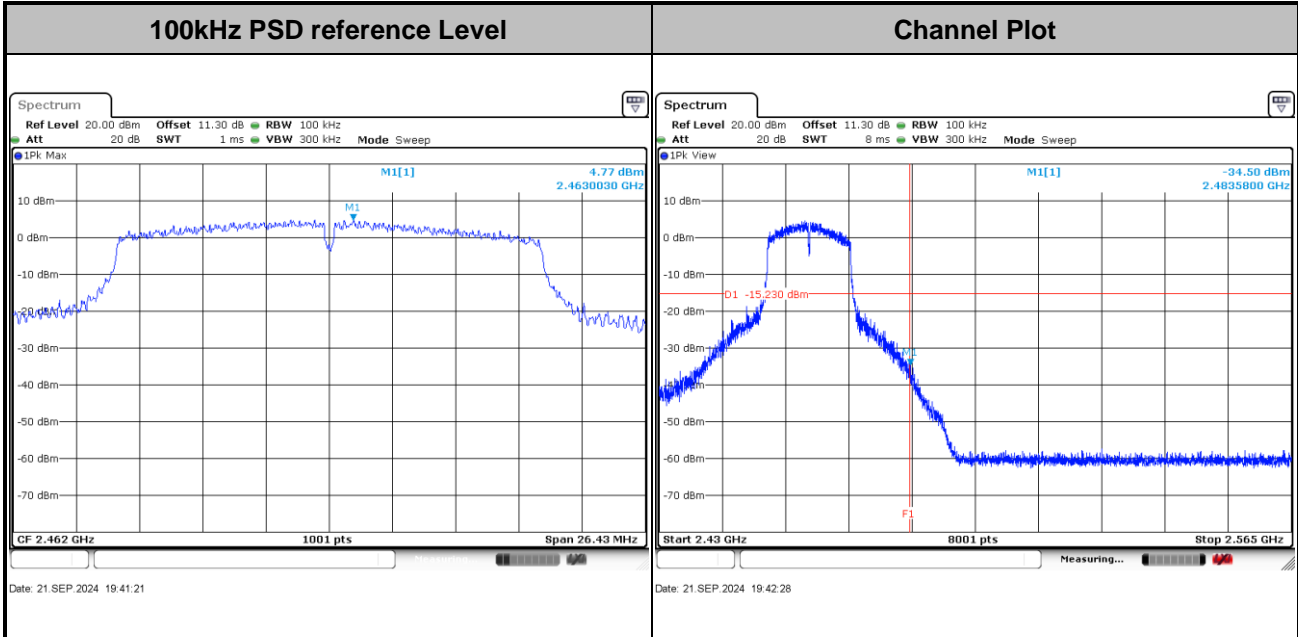





Test Mode : 802.11n HT40 Test Channel : 03

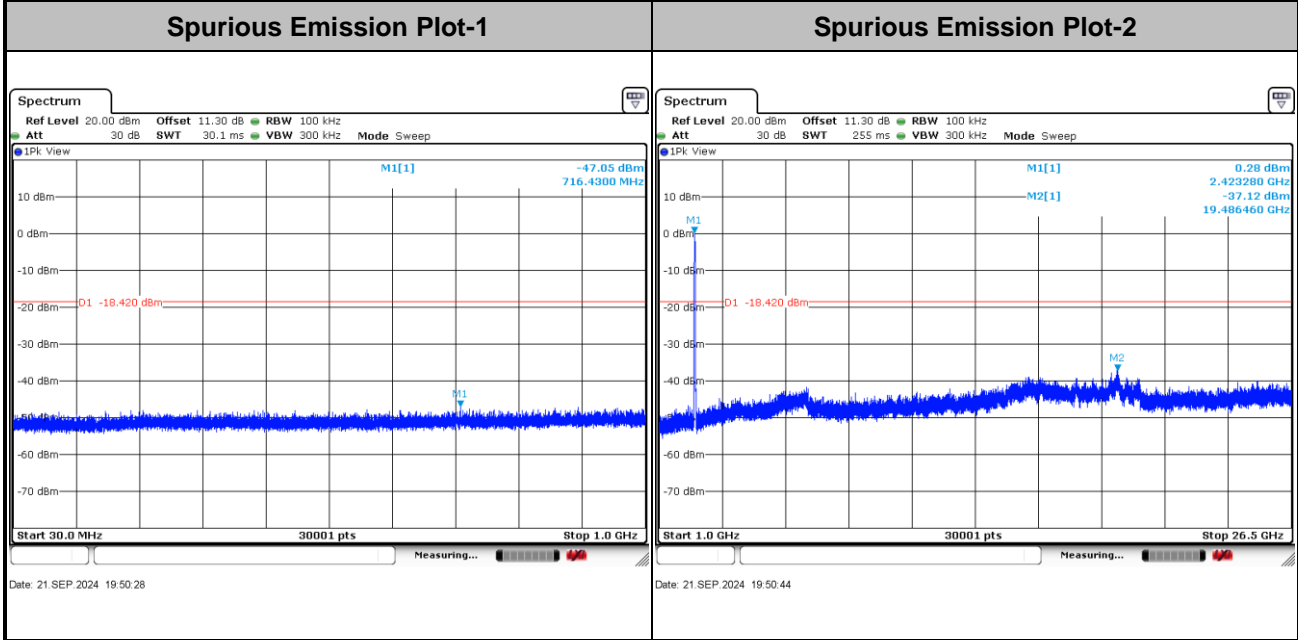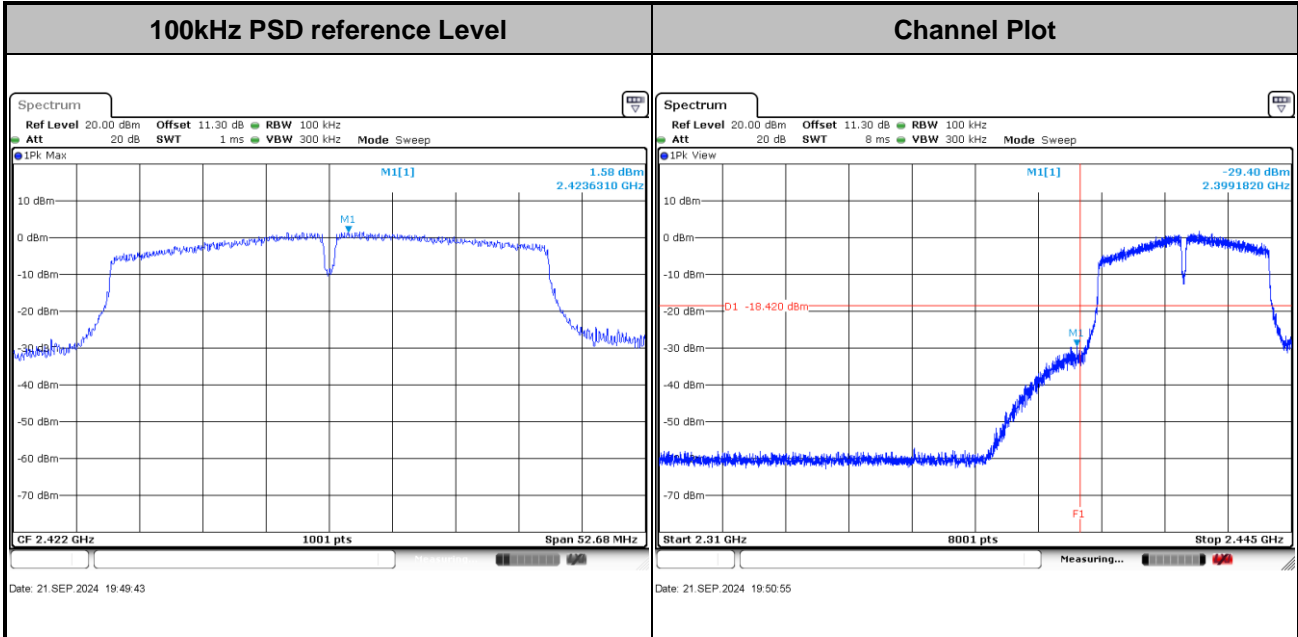





| | | | |
|-------------|--------------|----------------|----|
| Test Mode : | 802.11n HT40 | Test Channel : | 06 |
|-------------|--------------|----------------|----|

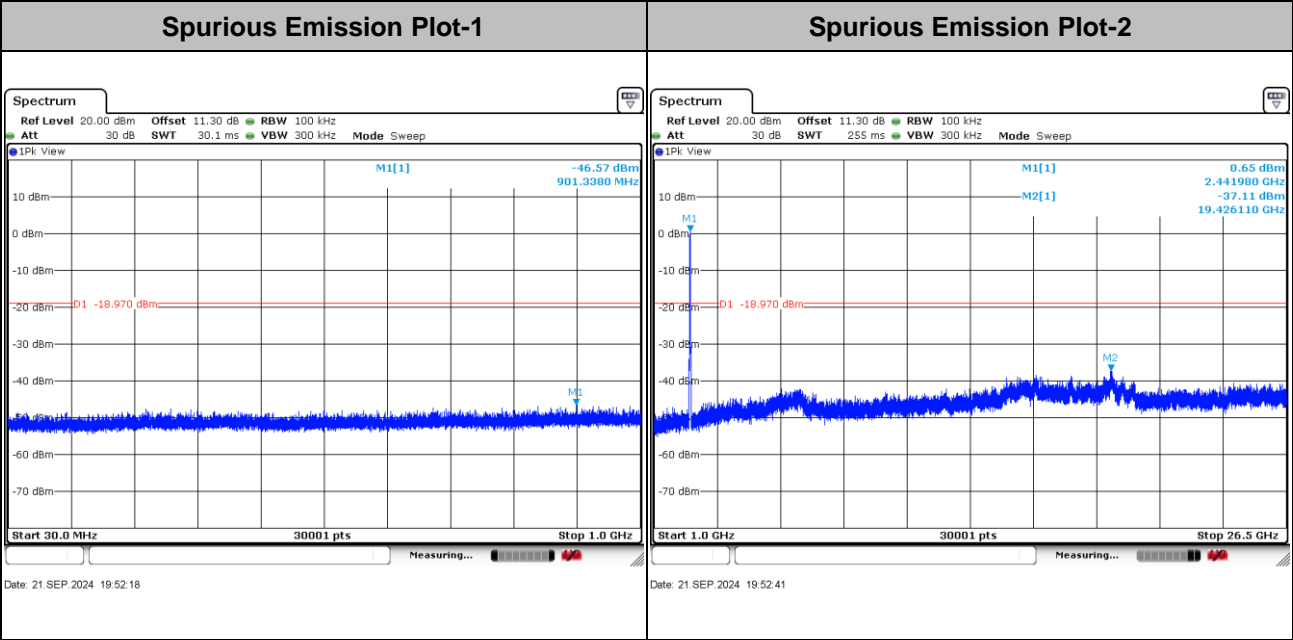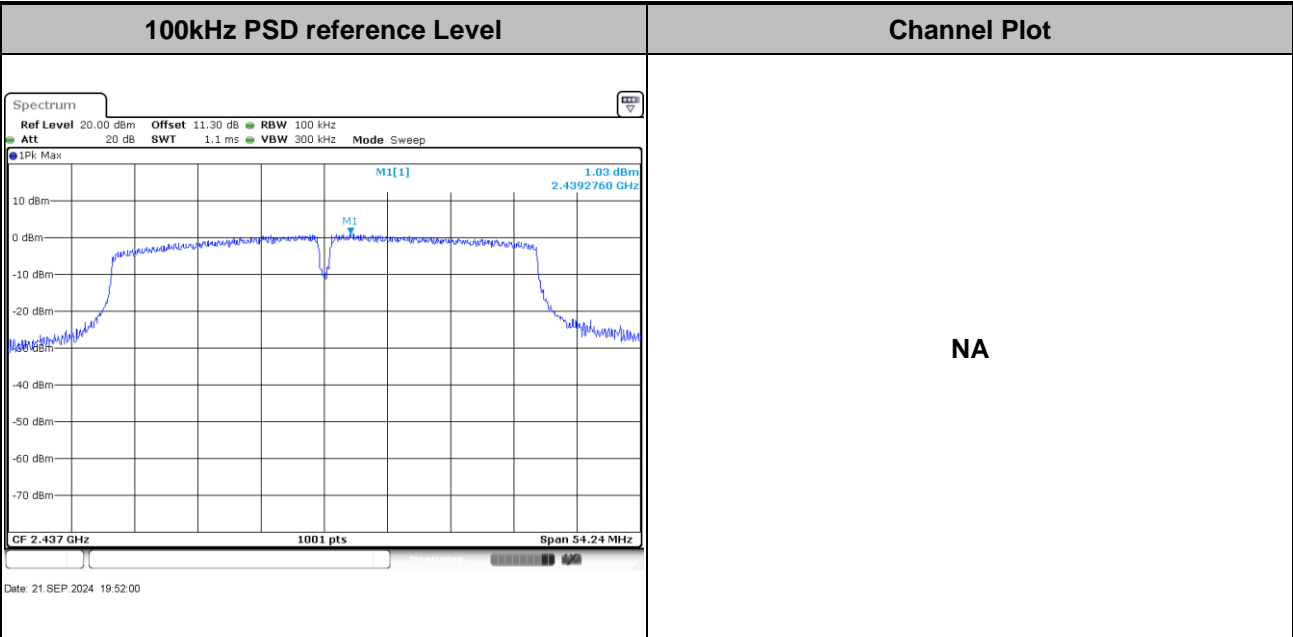



Test Mode : 802.11n HT40 Test Channel : 09

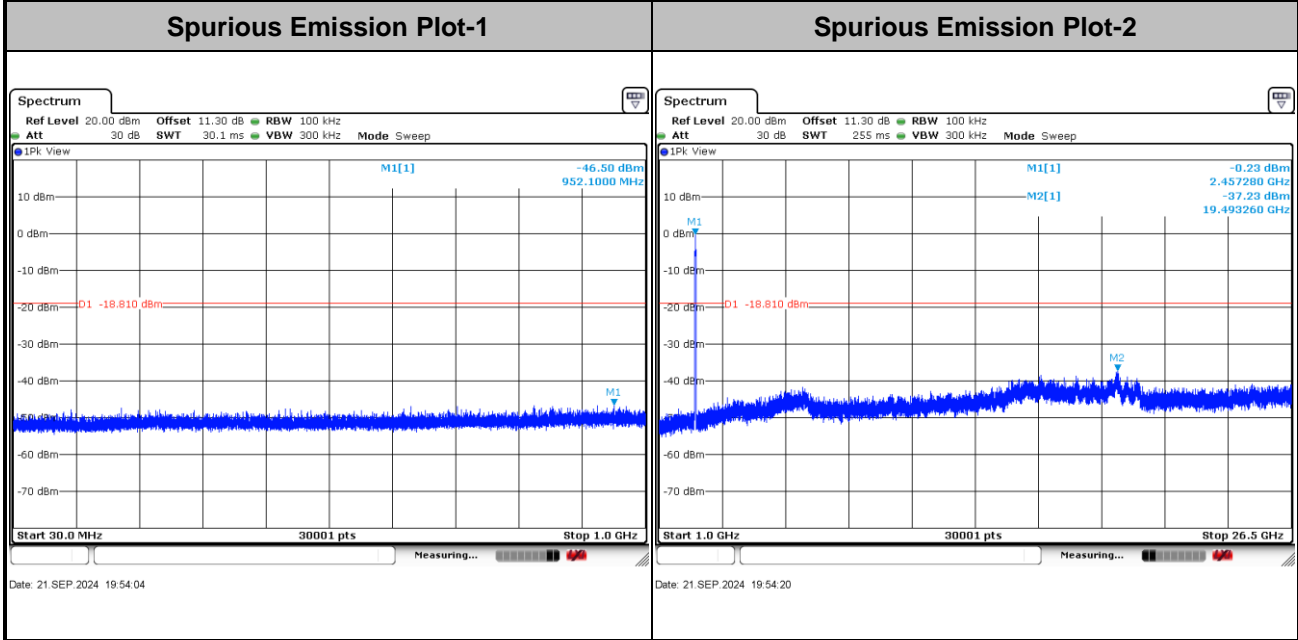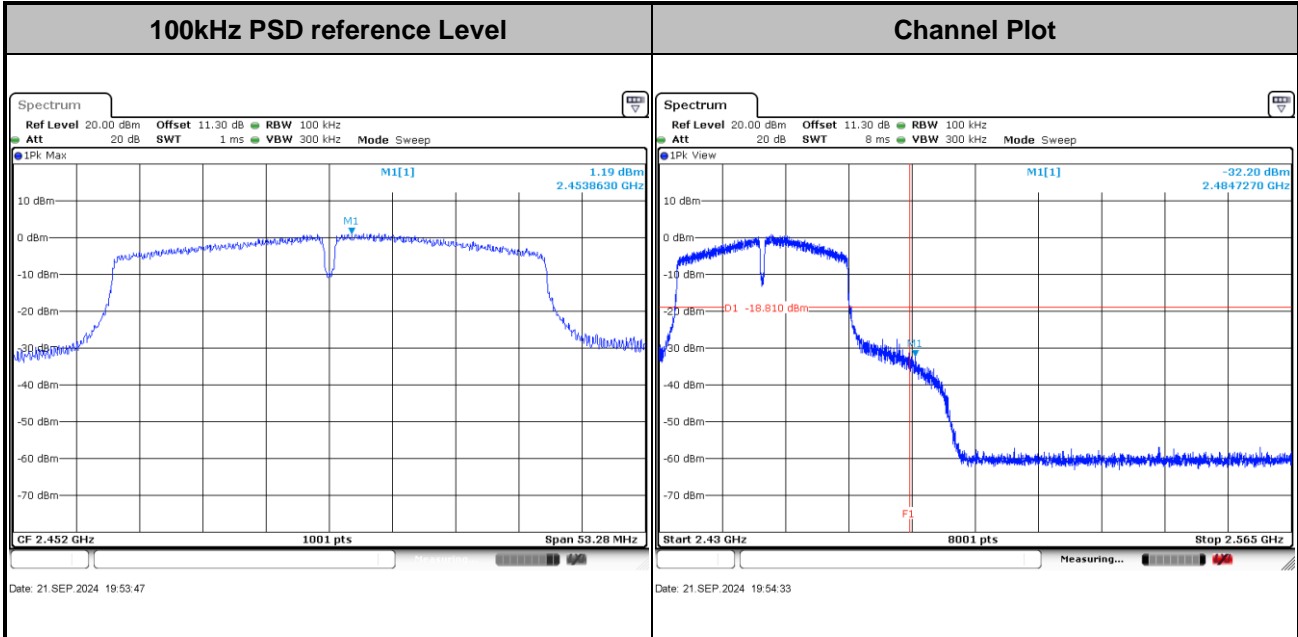



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009 – 0.490 | 2400/F(kHz) | 300 |
| 0.490 – 1.705 | 24000/F(kHz) | 30 |
| 1.705 – 30.0 | 30 | 30 |
| 30 – 88 | 100 | 3 |
| 88 – 216 | 150 | 3 |
| 216 - 960 | 200 | 3 |
| Above 960 | 500 | 3 |

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

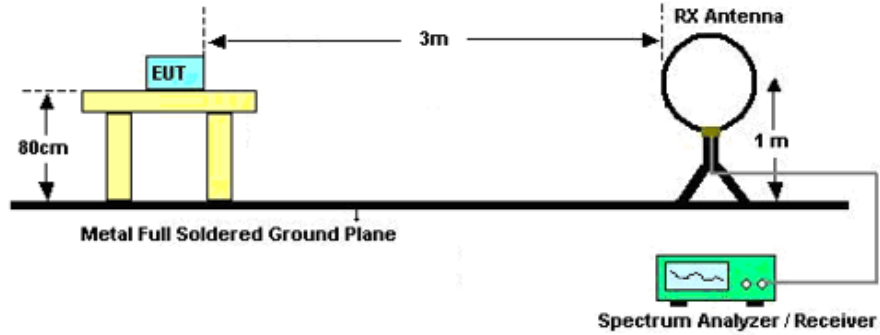

For radiated emissions from 30MHz to 1GHz

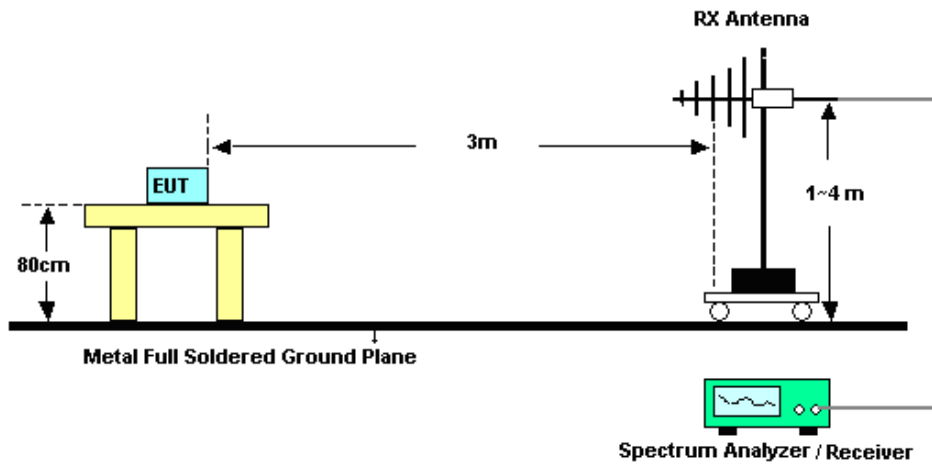

For radiated emissions above 1GHz

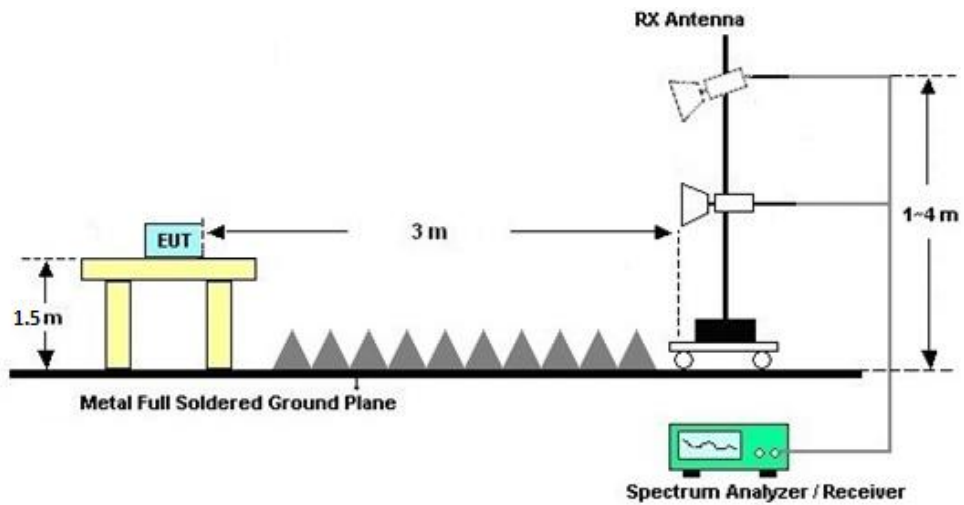



3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

| Frequency of Emission (MHz) | Conducted Limit (dBµV) | |
|-----------------------------|------------------------|-----------|
| | Quasi-Peak | Average |
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

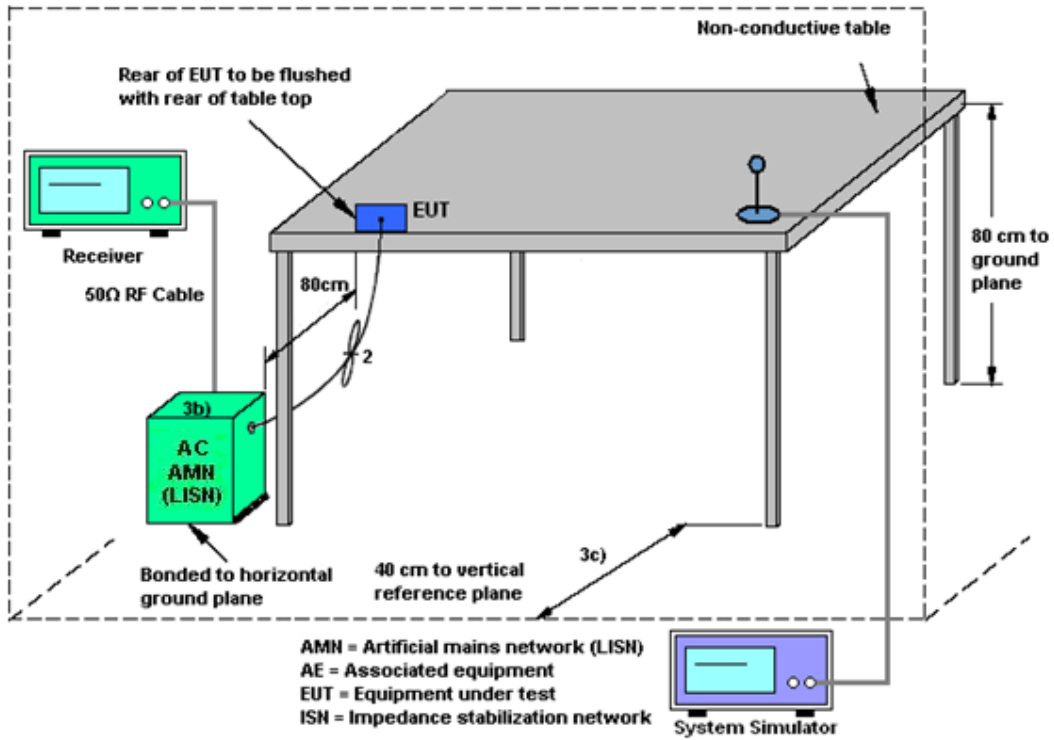

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Test Date | Due Date | Remark |
|---------------------------|----------------------|------------------------------|--------------|------------------------------|------------------|---------------------------------|---------------|-----------------------|
| Spectrum Analyzer | R&S | FSV40 | 101078 | 10Hz~40GHz | Apr. 09, 2024 | Sep. 21, 2024 | Apr. 08, 2025 | Conducted (TH01-SZ) |
| Pulse Power Sensor | Anritsu | MA2411B | 1339473 | 30MHz~40GHz | Dec. 29, 2023 | Sep. 21, 2024 | Dec. 28, 2024 | Conducted (TH01-SZ) |
| Thermo meter | Anymetre | JR593 | #7 | - 10°C ~ 50°C 10%RH~99%RH | Apr. 09, 2024 | Sep. 21, 2024 | Apr. 08, 2025 | Conducted (TH01-SZ) |
| EMI Test Receiver&SA | KEYSIGHT | N9038A | MY54450083 | 20Hz~8.4GHz | Apr. 09, 2024 | Sep. 22, 2024~ Sep. 26, 2024 | Apr. 08, 2025 | Radiation (03CH03-SZ) |
| EXA Spectrum Analyzer | KEYSIGHT | N9010A | MY55150246 | 10Hz~44GHz; | Apr. 09, 2024 | Sep. 22, 2024~ Sep. 26, 2024 | Apr. 08, 2025 | Radiation (03CH03-SZ) |
| Loop Antenna | R&S | HFH2-Z2E | 101141 | 9kHz~30MHz | Dec. 29, 2023 | Sep. 22, 2024~ Sep. 26, 2024 | Dec. 28, 2024 | Radiation (03CH03-SZ) |
| Bilog Antenna | TeseQ | CBL6112D | 35408 | 30MHz-2GHz | Aug. 20, 2023 | Sep. 22, 2024~ Sep. 26, 2024 | Aug. 19, 2025 | Radiation (03CH03-SZ) |
| Double Ridge Horn Antenna | SCHWARZBECK | BBHA9120D | 9120D-1355 | 1GHz~18GHz | Apr. 09, 2024 | Sep. 22, 2024~ Sep. 26, 2024 | Apr. 08, 2025 | Radiation (03CH03-SZ) |
| HF Amplifier | MITEQ | TTA1840-35-HG | 1871923 | 18GHz~40GHz | Jul. 03, 2024 | Sep. 22, 2024~ Sep. 26, 2024 | Jul. 02, 2025 | Radiation (03CH03-SZ) |
| SHF-EHF Horn | com-power | AH-840 | 101071 | 18Ghz-40GHz | Apr. 09, 2024 | Sep. 22, 2024~ Sep. 26, 2024 | Apr. 08, 2025 | Radiation (03CH03-SZ) |
| Amplifier | Burgeon | BPA-530 | 102211 | 0.01Hz ~3000MHz | Oct. 18, 2023 | Sep. 22, 2024~ Sep. 26, 2024 | Oct. 17, 2024 | Radiation (03CH03-SZ) |
| HF Amplifier | MITEQ | AMF-7D-0010 1800-30-10P-R | 1943528 | 1GHz~18GHz | Oct. 18, 2023 | Sep. 22, 2024~ Sep. 26, 2024 | Oct. 17, 2024 | Radiation (03CH03-SZ) |
| Amplifier | Agilent Technologies | 83017A | MY39501302 | 500MHz~26.5GHz | Dec. 27, 2023 | Sep. 22, 2024~ Sep. 26, 2024 | Dec. 26, 2024 | Radiation (03CH03-SZ) |
| AC Power Source | Chroma | 61601 | 616010002729 | N/A | Oct. 18, 2023 | Sep. 22, 2024~ Sep. 26, 2024 | Oct. 17, 2024 | Radiation (03CH03-SZ) |
| Turn Table | EM | EM1000 | N/A | 0~360 degree | NCR | Sep. 22, 2024~ Sep. 26, 2024 | NCR | Radiation (03CH03-SZ) |
| Antenna Mast | EM | EM1000 | N/A | 1 m~4 m | NCR | Sep. 22, 2024~ Sep. 26, 2024 | NCR | Radiation (03CH03-SZ) |
| EMI Receiver | R&S | ESR7 | 102297 | 9kHz~7GHz; | Jul. 03, 2024 | Sep. 24, 2024 | Jul. 02, 2025 | Conduction (CO02-SZ) |
| AC LISN | R&S | ENV216 | 101499 | 9kHz~30MHz | Jul. 03, 2024 | Sep. 24, 2024 | Jul. 02, 2025 | Conduction (CO02-SZ) |
| AC Power Source | CHROMA | 61601 | 616010002470 | 100Vac~250Vac | Dec. 25, 2022 | Sep. 24, 2024 | Dec. 24, 2024 | Conduction (CO02-SZ) |

NCR: No Calibration Required



5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

| Test Item | Uncertainty |
|--|-------------|
| Conducted Spurious Emission & Bandedge | ±1.34 dB |
| Occupied Channel Bandwidth | ±0.012 MHz |
| Conducted Power | ±1.34 dB |
| Conducted Power Spectral Density | ±1.32 dB |
| Frequency | ±1.3 Hz |

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

| | |
|---|--------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 2.5 dB |
|---|--------|

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

| | |
|---|--------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 5.0 dB |
|---|--------|

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

| | |
|---|--------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 4.9 dB |
|---|--------|

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

| | |
|---|--------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 5.0 dB |
|---|--------|

----- THE END -----



Appendix A. Conducted Test Results

Appendix A. Test Result of Conducted Test Items

| | | | | |
|----------------|--------------|--------------------|-------|----|
| Test Engineer: | He Qingsheng | Temperature: | 21~25 | °C |
| Test Date: | 2024/9/21 | Relative Humidity: | 51~54 | % |

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

| 2.4GHz Band | | | | | | | | |
|-------------|-----------|-----|-----|-------------|-----------------------|--------------|--------------------|-----------|
| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | 99% Occupied BW (MHz) | 6dB BW (MHz) | 6dB BW Limit (MHz) | Pass/Fail |
| | | | | | Ant 5 | Ant 5 | | |
| 11b | 1Mbps | 1 | 1 | 2412 | 12.87 | 8.08 | 0.50 | Pass |
| 11b | 1Mbps | 1 | 6 | 2437 | 12.98 | 8.60 | 0.50 | Pass |
| 11b | 1Mbps | 1 | 11 | 2462 | 13.00 | 8.12 | 0.50 | Pass |
| 11g | 6Mbps | 1 | 1 | 2412 | 16.95 | 16.36 | 0.50 | Pass |
| 11g | 6Mbps | 1 | 6 | 2437 | 17.01 | 16.40 | 0.50 | Pass |
| 11g | 6Mbps | 1 | 11 | 2462 | 16.98 | 16.38 | 0.50 | Pass |
| HT20 | MCS0 | 1 | 1 | 2412 | 17.90 | 17.64 | 0.50 | Pass |
| HT20 | MCS0 | 1 | 6 | 2437 | 18.04 | 17.64 | 0.50 | Pass |
| HT20 | MCS0 | 1 | 11 | 2462 | 18.02 | 17.62 | 0.50 | Pass |
| HT40 | MCS0 | 1 | 3 | 2422 | 36.37 | 35.12 | 0.50 | Pass |
| HT40 | MCS0 | 1 | 6 | 2437 | 36.73 | 36.16 | 0.50 | Pass |
| HT40 | MCS0 | 1 | 9 | 2452 | 36.33 | 35.52 | 0.50 | Pass |

TEST RESULTS DATA
Peak Power Spectral Density

| 2.4GHz Band | | | | | | | | |
|-------------|-----------|-----|-----|-------------|---------------------|----------|---------------------------|-----------|
| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | Peak PSD (dBm/3kHz) | DG (dBi) | Peak PSD Limit (dBm/3kHz) | Pass/Fail |
| | | | | | Ant 5 | Ant 5 | Ant 5 | |
| 11b | 1Mbps | 1 | 1 | 2412 | -2.92 | -4.50 | 8.00 | Pass |
| 11b | 1Mbps | 1 | 6 | 2437 | -3.53 | -4.50 | 8.00 | Pass |
| 11b | 1Mbps | 1 | 11 | 2462 | -2.95 | -4.50 | 8.00 | Pass |
| 11g | 6Mbps | 1 | 1 | 2412 | -7.51 | -4.50 | 8.00 | Pass |
| 11g | 6Mbps | 1 | 6 | 2437 | -5.37 | -4.50 | 8.00 | Pass |
| 11g | 6Mbps | 1 | 11 | 2462 | -6.43 | -4.50 | 8.00 | Pass |
| HT20 | MCS0 | 1 | 1 | 2412 | -7.34 | -4.50 | 8.00 | Pass |
| HT20 | MCS0 | 1 | 6 | 2437 | -6.24 | -4.50 | 8.00 | Pass |
| HT20 | MCS0 | 1 | 11 | 2462 | -6.49 | -4.50 | 8.00 | Pass |
| HT40 | MCS0 | 1 | 3 | 2422 | -9.53 | -4.50 | 8.00 | Pass |
| HT40 | MCS0 | 1 | 6 | 2437 | -10.58 | -4.50 | 8.00 | Pass |
| HT40 | MCS0 | 1 | 9 | 2452 | -10.63 | -4.50 | 8.00 | Pass |

Measured power density (dBm) has offset with cable loss.

TEST RESULTS DATA
Average Output Power

| 2.4GHz Band | | | | | | | | | | |
|-------------|-----------|-----|-----|-------------|-------------------------------|-----------------------------|----------|------------------|------------------------|------------|
| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | Average Conducted Power (dBm) | Conducted Power Limit (dBm) | DG (dBi) | EIRP Power (dBm) | EIRP Power Limit (dBm) | Pass /Fail |
| | | | | | Ant 5 | Ant 5 | Ant 5 | Ant 5 | Ant 5 | |
| 11b | 1Mbps | 1 | 1 | 2412 | 18.80 | 30.00 | -4.50 | 14.30 | 36.00 | Pass |
| 11b | 1Mbps | 1 | 6 | 2437 | 19.00 | 30.00 | -4.50 | 14.50 | 36.00 | Pass |
| 11b | 1Mbps | 1 | 11 | 2462 | 18.90 | 30.00 | -4.50 | 14.40 | 36.00 | Pass |
| 11g | 6Mbps | 1 | 1 | 2412 | 18.70 | 30.00 | -4.50 | 14.20 | 36.00 | Pass |
| 11g | 6Mbps | 1 | 6 | 2437 | 18.80 | 30.00 | -4.50 | 14.30 | 36.00 | Pass |
| 11g | 6Mbps | 1 | 11 | 2462 | 17.60 | 30.00 | -4.50 | 13.10 | 36.00 | Pass |
| HT20 | MCS0 | 1 | 1 | 2412 | 18.80 | 30.00 | -4.50 | 14.30 | 36.00 | Pass |
| HT20 | MCS0 | 1 | 6 | 2437 | 18.90 | 30.00 | -4.50 | 14.40 | 36.00 | Pass |
| HT20 | MCS0 | 1 | 11 | 2462 | 17.70 | 30.00 | -4.50 | 13.20 | 36.00 | Pass |
| HT40 | MCS0 | 1 | 3 | 2422 | 17.20 | 30.00 | -4.50 | 12.70 | 36.00 | Pass |
| HT40 | MCS0 | 1 | 6 | 2437 | 17.30 | 30.00 | -4.50 | 12.80 | 36.00 | Pass |
| HT40 | MCS0 | 1 | 9 | 2452 | 15.30 | 30.00 | -4.50 | 10.80 | 36.00 | Pass |

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Output Power


| 2.4GHz Band | | | | | | | | | | |
|-------------|-----------|-----|-----|-------------|----------------------------|-----------------------------|----------|------------------|------------------------|------------|
| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | Peak Conducted Power (dBm) | Conducted Power Limit (dBm) | DG (dBi) | EIRP Power (dBm) | EIRP Power Limit (dBm) | Pass /Fail |
| | | | | | Ant 5 | Ant 5 | Ant 5 | Ant 5 | Ant 5 | |
| 11b | 1Mbps | 1 | 1 | 2412 | 21.18 | 30.00 | -4.50 | 16.68 | 36.00 | Pass |
| 11b | 1Mbps | 1 | 6 | 2437 | 21.49 | 30.00 | -4.50 | 16.99 | 36.00 | Pass |
| 11b | 1Mbps | 1 | 11 | 2462 | 21.26 | 30.00 | -4.50 | 16.76 | 36.00 | Pass |
| 11g | 6Mbps | 1 | 1 | 2412 | 25.41 | 30.00 | -4.50 | 20.91 | 36.00 | Pass |
| 11g | 6Mbps | 1 | 6 | 2437 | 25.84 | 30.00 | -4.50 | 21.34 | 36.00 | Pass |
| 11g | 6Mbps | 1 | 11 | 2462 | 24.79 | 30.00 | -4.50 | 20.29 | 36.00 | Pass |
| HT20 | MCS0 | 1 | 1 | 2412 | 25.47 | 30.00 | -4.50 | 20.97 | 36.00 | Pass |
| HT20 | MCS0 | 1 | 6 | 2437 | 25.96 | 30.00 | -4.50 | 21.46 | 36.00 | Pass |
| HT20 | MCS0 | 1 | 11 | 2462 | 25.13 | 30.00 | -4.50 | 20.63 | 36.00 | Pass |
| HT40 | MCS0 | 1 | 3 | 2422 | 25.63 | 30.00 | -4.50 | 21.13 | 36.00 | Pass |
| HT40 | MCS0 | 1 | 6 | 2437 | 25.59 | 30.00 | -4.50 | 21.09 | 36.00 | Pass |
| HT40 | MCS0 | 1 | 9 | 2452 | 25.02 | 30.00 | -4.50 | 20.52 | 36.00 | Pass |

Note: Measured power (dBm) has offset with cable loss.



Appendix B. AC Conducted Emission Test Results

| | | | |
|-----------------|---|---------------------|---------|
| Test Engineer : | Chase Nathon | Temperature : | 22~24°C |
| | | Relative Humidity : | 44~50% |
| Test Voltage : | 120Vac / 60Hz | Phase : | Line |
| Remark : | All emissions not reported here are more than 10 dB below the prescribed limit. | | |

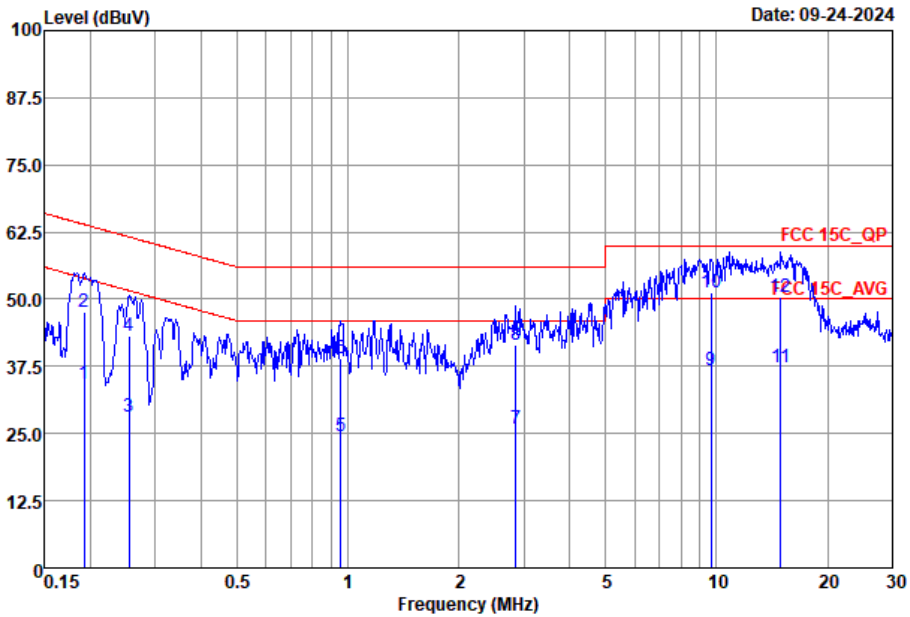


Site : CO02-SZ
 Condition : FCC 15C_QP LISN_2024-L LINE

| | Freq | Level | Over | Limit | Read | LISN | Cable | Remark |
|------|-------|-------|--------|-------|-------|--------|-------|---------|
| | MHz | dBuV | Limit | Line | Level | Factor | Loss | |
| | | | dB | dBuV | dBuV | dB | dB | |
| 1 | 0.19 | 34.13 | -19.80 | 53.93 | 13.90 | 10.07 | 10.16 | Average |
| 2 | 0.19 | 47.53 | -16.40 | 63.93 | 27.30 | 10.07 | 10.16 | QP |
| 3 | 0.25 | 28.19 | -23.41 | 51.60 | 8.00 | 10.04 | 10.15 | Average |
| 4 | 0.25 | 43.09 | -18.51 | 61.60 | 22.90 | 10.04 | 10.15 | QP |
| 5 | 0.96 | 24.60 | -21.40 | 46.00 | 4.40 | 9.97 | 10.23 | Average |
| 6 | 0.96 | 38.90 | -17.10 | 56.00 | 18.70 | 9.97 | 10.23 | QP |
| 7 | 2.85 | 25.87 | -20.13 | 46.00 | 5.70 | 9.92 | 10.25 | Average |
| 8 | 2.85 | 41.37 | -14.63 | 56.00 | 21.20 | 9.92 | 10.25 | QP |
| 9 | 9.65 | 36.87 | -13.13 | 50.00 | 16.90 | 9.68 | 10.29 | Average |
| 10 * | 9.65 | 51.37 | -8.63 | 60.00 | 31.40 | 9.68 | 10.29 | QP |
| 11 | 14.91 | 37.45 | -12.55 | 50.00 | 17.40 | 9.56 | 10.49 | Average |
| 12 | 14.91 | 50.55 | -9.45 | 60.00 | 30.50 | 9.56 | 10.49 | QP |



| | | | |
|-----------------|---|---------------------|---------|
| Test Engineer : | Chase Nathon | Temperature : | 22~24°C |
| | | Relative Humidity : | 44~50% |
| Test Voltage : | 120Vac / 60Hz | Phase : | Neutral |
| Remark : | All emissions not reported here are more than 10 dB below the prescribed limit. | | |

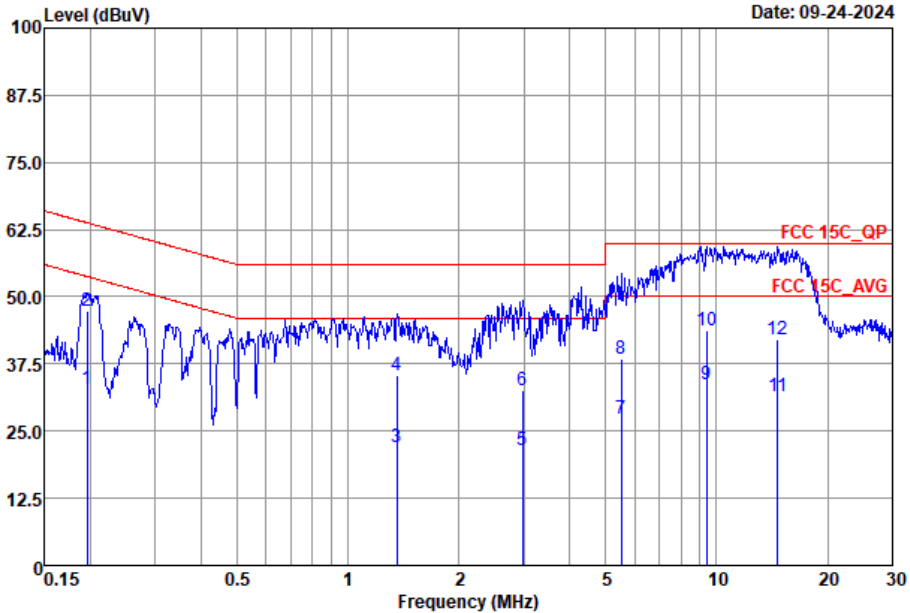

Site : CO02-SZ
 Condition : FCC 15C_QP LISN_2024-N NEUTRAL

| | Freq | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Remark |
|------|-------|-------|------------|------------|------------|-------------|------------|---------|
| | MHz | dBuV | dB | dBuV | dBuV | dB | dB | |
| 1 | 0.20 | 32.80 | -20.96 | 53.76 | 12.60 | 10.04 | 10.16 | Average |
| 2 | 0.20 | 47.30 | -16.46 | 63.76 | 27.10 | 10.04 | 10.16 | QP |
| 3 | 1.36 | 22.09 | -23.91 | 46.00 | 1.90 | 9.95 | 10.24 | Average |
| 4 | 1.36 | 35.29 | -20.71 | 56.00 | 15.10 | 9.95 | 10.24 | QP |
| 5 | 2.98 | 21.56 | -24.44 | 46.00 | 1.40 | 9.91 | 10.25 | Average |
| 6 | 2.98 | 32.66 | -23.34 | 56.00 | 12.50 | 9.91 | 10.25 | QP |
| 7 | 5.51 | 27.26 | -22.74 | 50.00 | 7.20 | 9.82 | 10.24 | Average |
| 8 | 5.51 | 38.36 | -21.64 | 60.00 | 18.30 | 9.82 | 10.24 | QP |
| 9 | 9.40 | 33.80 | -16.20 | 50.00 | 13.80 | 9.71 | 10.29 | Average |
| 10 * | 9.40 | 43.80 | -16.20 | 60.00 | 23.80 | 9.71 | 10.29 | QP |
| 11 | 14.67 | 31.34 | -18.66 | 50.00 | 11.20 | 9.66 | 10.48 | Average |
| 12 | 14.67 | 42.04 | -17.96 | 60.00 | 21.90 | 9.66 | 10.48 | QP |

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission Test Data

| | | | |
|-----------------|--------------|---------------------|---------|
| Test Engineer : | LiangHuaCong | Relative Humidity : | 50% |
| | | Temperature : | 20-24°C |

Radiated Spurious Emission Test Modes

| Mode | Band (MHz) | Antenna | Modulation | Channel | Frequency | Data Rate | RU | Remark |
|---------|-------------|---------|--------------|---------|-----------|-----------|----|------------|
| Mode 11 | 2400-2483.5 | 5 | 802.11b | 01 | 2412 | 1Mbps | - | Sample1 |
| Mode 12 | 2400-2483.5 | 5 | 802.11b | 06 | 2437 | 1Mbps | - | Sample1 |
| Mode 13 | 2400-2483.5 | 5 | 802.11b | 11 | 2462 | 1Mbps | - | Sample1 |
| Mode 14 | 2400-2483.5 | 5 | 802.11g | 01 | 2412 | 6Mbps | - | Sample1 |
| Mode 15 | 2400-2483.5 | 5 | 802.11g | 06 | 2437 | 6Mbps | - | Sample1 |
| Mode 16 | 2400-2483.5 | 5 | 802.11g | 11 | 2462 | 6Mbps | - | Sample1 |
| Mode 17 | 2400-2483.5 | 5 | 802.11n HT20 | 01 | 2412 | MCS0 | - | Sample1 |
| Mode 18 | 2400-2483.5 | 5 | 802.11n HT20 | 06 | 2437 | MCS0 | - | Sample1 |
| Mode 19 | 2400-2483.5 | 5 | 802.11n HT20 | 11 | 2462 | MCS0 | - | Sample1 |
| Mode 20 | 2400-2483.5 | 5 | 802.11n HT40 | 03 | 2422 | MCS0 | - | Sample1 |
| Mode 21 | 2400-2483.5 | 5 | 802.11n HT40 | 09 | 2452 | MCS0 | - | Sample1 |
| Mode 22 | 2400-2483.5 | 5 | 802.11n HT20 | 11 | 2462 | MCS0 | - | Sample1-LF |
| Mode 24 | COTX | 0 | B 13 | - | - | - | - | Sample1 |
| | | 5 | 802.11n HT20 | 11 | 2462 | MCS0 | - | Sample1 |
| Mode 25 | 2400-2483.5 | 5 | 802.11n HT20 | 11 | 2462 | MCS0 | - | Sample2 |
| Mode 26 | 2400-2483.5 | 5 | 802.11n HT20 | 11 | 2462 | MCS0 | - | Sample3 |







Summary of each worse mode

| Mode | Modulation | Ch. | Freq. (MHz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Pol. | Peak Avg. | Result | Remark |
|------|--------------|-----|-------------|----------------|----------------|-------------|------|-----------|--------|-----------|
| 11 | 802.11b | 01 | 2388.00 | 39.38 | 54.00 | -14.62 | V | AVERAGE | Pass | Band Edge |
| | 802.11b | 01 | 4824.00 | 50.92 | 54.00 | -23.08 | V | AVERAGE | Pass | Band Edge |
| 12 | 802.11b | 06 | - | - | - | - | - | - | - | Band Edge |
| 12 | 802.11b | 06 | 7311.00 | 50.16 | 54.00 | -3.84 | H | Average | Pass | Harmonic |
| 13 | 802.11b | 11 | 2486.81 | 41.07 | 54.00 | -12.93 | H | AVERAGE | Pass | Band Edge |
| 13 | 802.11b | 11 | 4924.00 | 50.58 | 74.00 | -23.42 | H | Peak | Pass | Harmonic |
| 14 | 802.11g | 01 | - | - | - | - | - | - | - | Band Edge |
| 14 | 802.11g | 01 | 4824.00 | 41.19 | 74.00 | -32.81 | V | Peak | Pass | Harmonic |
| 15 | 802.11g | 06 | - | - | - | - | - | - | - | Band Edge |
| 15 | 802.11g | 06 | 7311.00 | 44.86 | 74.00 | -29.14 | H | Peak | Pass | Harmonic |
| 16 | 802.11g | 11 | 2483.51 | 49.24 | 54.00 | -4.76 | H | AVERAGE | Pass | Band Edge |
| 16 | 802.11g | 11 | 7386.00 | 44.01 | 74.00 | -29.99 | H | Peak | Pass | Harmonic |
| 17 | 802.11n HT20 | 01 | 2389.95 | 46.73 | 54.00 | -7.27 | H | AVERAGE | Pass | Band Edge |
| | 802.11n HT20 | 01 | 4824.00 | 42.39 | 74.00 | -31.61 | H | Peak | Pass | Harmonic |
| 18 | 802.11n HT20 | 06 | - | - | - | - | - | - | - | Band Edge |
| 18 | 802.11n HT20 | 06 | 7311.00 | 43.58 | 74.00 | -30.42 | H | Peak | Pass | Harmonic |
| 19 | 802.11n HT20 | 11 | 2483.51 | 50.64 | 54.00 | -3.36 | H | AVERAGE | Pass | Band Edge |
| 19 | 802.11n HT20 | 11 | 7386.00 | 42.93 | 74.00 | -31.07 | H | Peak | Pass | Harmonic |
| 20 | 802.11n HT40 | 03 | 2389.97 | 44.25 | 54.00 | -9.75 | H | AVERAGE | Pass | Band Edge |
| 20 | 802.11n HT40 | 03 | - | - | - | - | - | - | - | Harmonic |
| 21 | 802.11n HT40 | 09 | 2483.54 | 50.43 | 54.00 | -3.57 | H | AVERAGE | Pass | Band Edge |
| 21 | 802.11n HT40 | 09 | - | - | - | - | - | - | - | Harmonic |
| 22 | 802.11n HT20 | 11 | 915.61 | 31.36 | 46.00 | -14.64 | V | Peak | Pass | LF |
| 24 | COTX | - | 2483.55 | 48.91 | 54 | -5.09 | H | AVERAGE | Pass | Band Edge |
| 24 | | - | 7386 | 43.01 | 74 | -30.99 | V | Peak | Pass | Harmonic |
| 25 | 802.11n HT20 | 11 | 2483.55 | 47.83 | 54.00 | -6.17 | H | AVERAGE | Pass | Band Edge |
| | 802.11n HT20 | 11 | 7386.00 | 43.59 | 74.00 | -30.41 | H | Peak | Pass | Harmonic |
| 26 | 802.11n HT20 | 11 | 2483.51 | 50.43 | 54.00 | -3.57 | H | AVERAGE | Pass | Band Edge |
| | 802.11n HT20 | 11 | 7386.00 | 42.96 | 74.00 | -31.04 | H | Peak | Pass | Harmonic |



| Mode | 11 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|-------|--------|-------------|--------|--------|--------|--------|-----------|------|-------|-------------|-------|--------|-------------|--|----|-----|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|-----------|---|-------|------|-----|-------|--------|------|------|--------|--|------|-------|-------------|-------|--------|-------------|--|----|-----|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|-------|-------|-------|------|-------|-----|-----------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_802.11b_CH01_2412MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2340.55</td> <td>50.14</td> <td>74.00</td> <td>-23.86</td> <td>48.30</td> <td>30.70</td> <td>4.74</td> <td>33.60</td> <td>208</td> <td>0 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 2340.55 | 50.14 | 74.00 | -23.86 | 48.30 | 30.70 | 4.74 | 33.60 | 208 | 0 PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>95.65</td> <td>-----</td> <td>-----</td> <td>93.74</td> <td>30.64</td> <td>4.82</td> <td>33.55</td> <td>208</td> <td>0 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 2412.00 | 95.65 | ----- | ----- | 93.74 | 30.64 | 4.82 | 33.55 | 208 | 0 PEAK |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2340.55 | 50.14 | 74.00 | -23.86 | 48.30 | 30.70 | 4.74 | 33.60 | 208 | 0 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2412.00 | 95.65 | ----- | ----- | 93.74 | 30.64 | 4.82 | 33.55 | 208 | 0 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2387.87</td> <td>39.30</td> <td>54.00</td> <td>-14.70</td> <td>37.47</td> <td>30.61</td> <td>4.79</td> <td>33.57</td> <td>208</td> <td>0 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 2387.87 | 39.30 | 54.00 | -14.70 | 37.47 | 30.61 | 4.79 | 33.57 | 208 | 0 AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>93.17</td> <td>-----</td> <td>-----</td> <td>91.26</td> <td>30.64</td> <td>4.82</td> <td>33.55</td> <td>208</td> <td>0 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 2412.00 | 93.17 | ----- | ----- | 91.26 | 30.64 | 4.82 | 33.55 | 208 | 0 AVERAGE |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2387.87 | 39.30 | 54.00 | -14.70 | 37.47 | 30.61 | 4.79 | 33.57 | 208 | 0 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2412.00 | 93.17 | ----- | ----- | 91.26 | 30.64 | 4.82 | 33.55 | 208 | 0 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

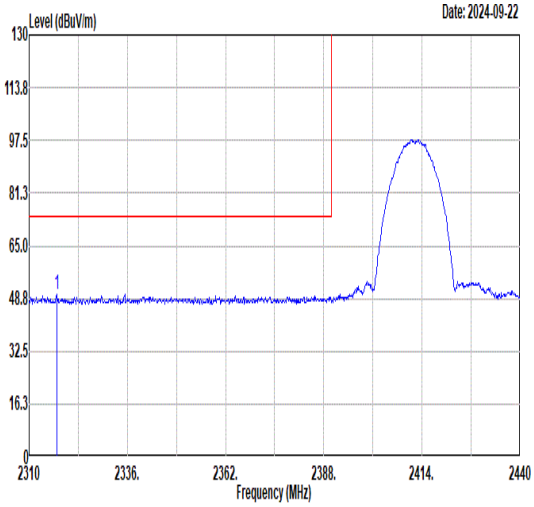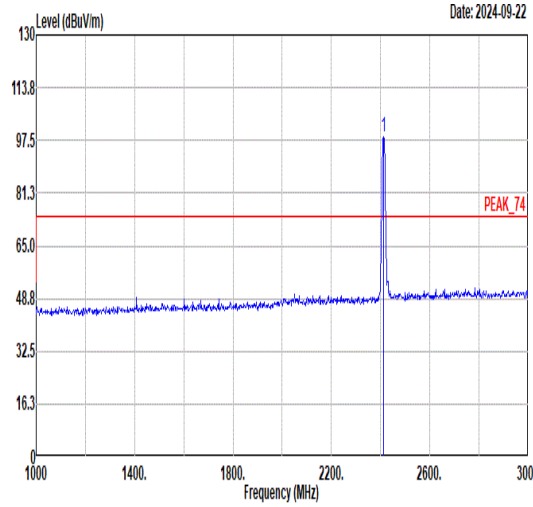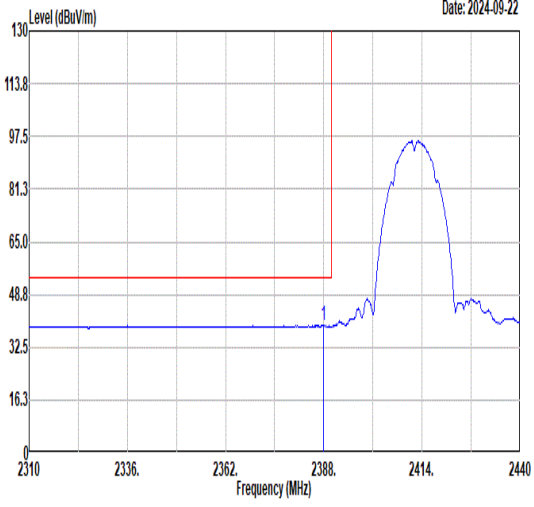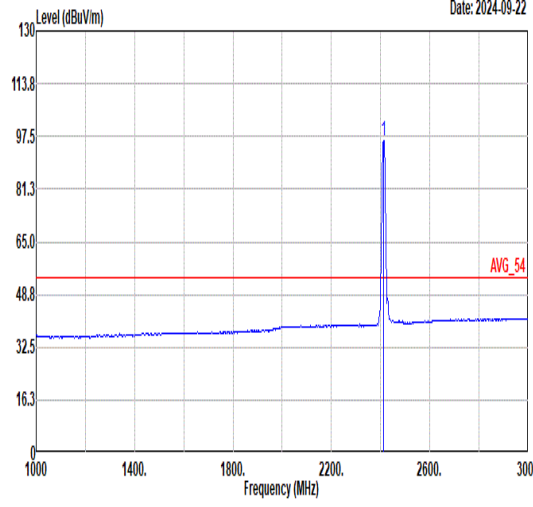

| Mode | 11 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|-------------|-------|--------|-------------|--------|--------|--------|--------|-----|---------|-------|-------------|-------|--------|-------------|--|----|-----|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|-----|---------|---|-------|------|-----|-------|--------|------|------|--------|--|------|-------|-------------|-------|--------|-------------|--|----|-----|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|-------|-------|-------|------|-------|-----|-----|---------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_802.11b_CH01_2412MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <p>Date: 2024-09-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2317.28</td> <td>49.85</td> <td>74.00</td> <td>-24.15</td> <td>47.99</td> <td>30.75</td> <td>4.72</td> <td>33.61</td> <td>200</td> <td>165</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 2317.28 | 49.85 | 74.00 | -24.15 | 47.99 | 30.75 | 4.72 | 33.61 | 200 | 165 | PEAK |  <p>Date: 2024-09-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>98.42</td> <td>-----</td> <td>-----</td> <td>96.51</td> <td>30.64</td> <td>4.82</td> <td>33.55</td> <td>200</td> <td>165</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 2412.00 | 98.42 | ----- | ----- | 96.51 | 30.64 | 4.82 | 33.55 | 200 | 165 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2317.28 | 49.85 | 74.00 | -24.15 | 47.99 | 30.75 | 4.72 | 33.61 | 200 | 165 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2412.00 | 98.42 | ----- | ----- | 96.51 | 30.64 | 4.82 | 33.55 | 200 | 165 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  <p>Date: 2024-09-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.00</td> <td>39.38</td> <td>54.00</td> <td>-14.62</td> <td>37.55</td> <td>30.61</td> <td>4.79</td> <td>33.57</td> <td>200</td> <td>165</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 2388.00 | 39.38 | 54.00 | -14.62 | 37.55 | 30.61 | 4.79 | 33.57 | 200 | 165 | AVERAGE |  <p>Date: 2024-09-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>95.96</td> <td>-----</td> <td>-----</td> <td>94.05</td> <td>30.64</td> <td>4.82</td> <td>33.55</td> <td>200</td> <td>165</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 2412.00 | 95.96 | ----- | ----- | 94.05 | 30.64 | 4.82 | 33.55 | 200 | 165 | AVERAGE |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2388.00 | 39.38 | 54.00 | -14.62 | 37.55 | 30.61 | 4.79 | 33.57 | 200 | 165 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2412.00 | 95.96 | ----- | ----- | 94.05 | 30.64 | 4.82 | 33.55 | 200 | 165 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 11 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|-------------|--------------|-------------|-------|--------|--------|-------|----|------|-------|-------------|--------------|-------------|--|--|--------|-----|--------|--------|----|------|------|----|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|----|------|--|-------|------|-----|-------|--------|------|------|--|------|-------|-------------|--------------|-------------|--|--|--------|-----|--------|--------|----|------|------|----|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|----|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_802.11b_CH01_2412MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>50.92</td> <td>74.00</td> <td>-23.08</td> <td>74.14</td> <td>34.26</td> <td>7.75</td> <td>65.23</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line Margin | Level Factor | Loss Factor | | | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 4824.00 | 50.92 | 74.00 | -23.08 | 74.14 | 34.26 | 7.75 | 65.23 | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>49.67</td> <td>74.00</td> <td>-24.33</td> <td>72.89</td> <td>34.26</td> <td>7.75</td> <td>65.23</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line Margin | Level Factor | Loss Factor | | | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 4824.00 | 49.67 | 74.00 | -24.33 | 72.89 | 34.26 | 7.75 | 65.23 | -- |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 4824.00 | 50.92 | 74.00 | -23.08 | 74.14 | 34.26 | 7.75 | 65.23 | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 4824.00 | 49.67 | 74.00 | -24.33 | 72.89 | 34.26 | 7.75 | 65.23 | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 12 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|-------------|-------|--------|-------------|--------|--------|--------|--------|------|---------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|---------|-------|-------|--------|-------|-------|------|-------|----|------|---|---------|-------|-------|--------|-------|-------|------|-------|-----|-----|------|---|---------|-------|-------|-------|-------|-------|------|-------|-----|-----|---------|--|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|---------|-------|-------|--------|-------|-------|------|-------|----|------|---|---------|-------|-------|--------|-------|-------|------|-------|----|------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_802.11b_CH06_2437MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>50.41</td> <td>74.00</td> <td>-23.59</td> <td>73.56</td> <td>34.33</td> <td>7.77</td> <td>65.25</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>54.42</td> <td>74.00</td> <td>-19.58</td> <td>74.70</td> <td>35.44</td> <td>8.93</td> <td>64.65</td> <td>141</td> <td>355</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>7311.00</td> <td>50.16</td> <td>54.00</td> <td>-3.84</td> <td>70.44</td> <td>35.44</td> <td>8.93</td> <td>64.65</td> <td>141</td> <td>355</td> <td>Average</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 4874.00 | 50.41 | 74.00 | -23.59 | 73.56 | 34.33 | 7.77 | 65.25 | -- | Peak | 2 | 7311.00 | 54.42 | 74.00 | -19.58 | 74.70 | 35.44 | 8.93 | 64.65 | 141 | 355 | Peak | 3 | 7311.00 | 50.16 | 54.00 | -3.84 | 70.44 | 35.44 | 8.93 | 64.65 | 141 | 355 | Average | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>48.51</td> <td>74.00</td> <td>-25.49</td> <td>71.66</td> <td>34.33</td> <td>7.77</td> <td>65.25</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>50.05</td> <td>74.00</td> <td>-23.95</td> <td>70.33</td> <td>35.44</td> <td>8.93</td> <td>64.65</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 4874.00 | 48.51 | 74.00 | -25.49 | 71.66 | 34.33 | 7.77 | 65.25 | -- | Peak | 2 | 7311.00 | 50.05 | 74.00 | -23.95 | 70.33 | 35.44 | 8.93 | 64.65 | -- | Peak |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 4874.00 | 50.41 | 74.00 | -23.59 | 73.56 | 34.33 | 7.77 | 65.25 | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 7311.00 | 54.42 | 74.00 | -19.58 | 74.70 | 35.44 | 8.93 | 64.65 | 141 | 355 | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 7311.00 | 50.16 | 54.00 | -3.84 | 70.44 | 35.44 | 8.93 | 64.65 | 141 | 355 | Average | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 4874.00 | 48.51 | 74.00 | -25.49 | 71.66 | 34.33 | 7.77 | 65.25 | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 7311.00 | 50.05 | 74.00 | -23.95 | 70.33 | 35.44 | 8.93 | 64.65 | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 13 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------|--------|--------|--------|--------|-------|------|-------------|------|--------|-------|--------|------|--------|----|-----|--------|-----|--------|--------|----|------|------|----|----|----|-----|--|---|---------|-------|-------|--------|-------|-------|------|-------|-----|-------------|---|-------|------|-----|-------|--------|------|------|------|-------|------|--------|-------|--------|------|--------|----|-----|--------|-----|--------|--------|----|------|------|----|----|----|-----|--|---|---------|--------|-------|-------|-------|-------|------|-------|-----|-------------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_802.11b_CH11_2462MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2489.55</td> <td>51.02</td> <td>74.00</td> <td>-22.98</td> <td>48.73</td> <td>30.87</td> <td>4.93</td> <td>33.51</td> <td>100</td> <td>156 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | cm | deg | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | 1 | 2489.55 | 51.02 | 74.00 | -22.98 | 48.73 | 30.87 | 4.93 | 33.51 | 100 | 156 PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>101.41</td> <td>-----</td> <td>-----</td> <td>99.28</td> <td>30.77</td> <td>4.89</td> <td>33.53</td> <td>100</td> <td>156 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | cm | deg | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | 1 | 2462.00 | 101.41 | ----- | ----- | 99.28 | 30.77 | 4.89 | 33.53 | 100 | 156 PEAK |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | cm | deg | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2489.55 | 51.02 | 74.00 | -22.98 | 48.73 | 30.87 | 4.93 | 33.51 | 100 | 156 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | cm | deg | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2462.00 | 101.41 | ----- | ----- | 99.28 | 30.77 | 4.89 | 33.53 | 100 | 156 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2486.81</td> <td>41.07</td> <td>54.00</td> <td>-12.93</td> <td>38.80</td> <td>30.86</td> <td>4.92</td> <td>33.51</td> <td>100</td> <td>156 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | cm | deg | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | 1 | 2486.81 | 41.07 | 54.00 | -12.93 | 38.80 | 30.86 | 4.92 | 33.51 | 100 | 156 AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>99.22</td> <td>-----</td> <td>-----</td> <td>97.08</td> <td>30.77</td> <td>4.89</td> <td>33.52</td> <td>100</td> <td>156 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | cm | deg | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | 1 | 2462.00 | 99.22 | ----- | ----- | 97.08 | 30.77 | 4.89 | 33.52 | 100 | 156 AVERAGE |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | cm | deg | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2486.81 | 41.07 | 54.00 | -12.93 | 38.80 | 30.86 | 4.92 | 33.51 | 100 | 156 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | cm | deg | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2462.00 | 99.22 | ----- | ----- | 97.08 | 30.77 | 4.89 | 33.52 | 100 | 156 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 13 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|-------------|--------|--------|--------|--------|--------|-------|------|------------|------|--------|-------|--------|------|--------|----|-----|--------|-----|--------|--------|----|------|------|----|----|----|-----|--|---|---------|-------|-------|--------|-------|-------|------|-------|-----|------------|---|-------|------|-----|-------|--------|------|------|------|-------|------|--------|-------|--------|------|--------|----|-----|--------|-----|--------|--------|----|------|------|----|----|----|-----|--|---|---------|-------|-------|--------|-------|-------|------|-------|-----|------------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_802.11b_CH11_2462MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2485.33</td> <td>96.93</td> <td>74.00</td> <td>-23.57</td> <td>48.16</td> <td>30.86</td> <td>4.92</td> <td>33.51</td> <td>221</td> <td>40 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | cm | deg | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | 1 | 2485.33 | 96.93 | 74.00 | -23.57 | 48.16 | 30.86 | 4.92 | 33.51 | 221 | 40 PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>96.93</td> <td>74.00</td> <td>-23.57</td> <td>48.16</td> <td>30.86</td> <td>4.92</td> <td>33.51</td> <td>221</td> <td>40 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | cm | deg | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | 1 | 2462.00 | 96.93 | 74.00 | -23.57 | 48.16 | 30.86 | 4.92 | 33.51 | 221 | 40 PEAK |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | cm | deg | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2485.33 | 96.93 | 74.00 | -23.57 | 48.16 | 30.86 | 4.92 | 33.51 | 221 | 40 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | cm | deg | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2462.00 | 96.93 | 74.00 | -23.57 | 48.16 | 30.86 | 4.92 | 33.51 | 221 | 40 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2486.59</td> <td>94.47</td> <td>65.00</td> <td>-13.71</td> <td>38.02</td> <td>30.86</td> <td>4.92</td> <td>33.51</td> <td>221</td> <td>40 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | cm | deg | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | 1 | 2486.59 | 94.47 | 65.00 | -13.71 | 38.02 | 30.86 | 4.92 | 33.51 | 221 | 40 AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>94.47</td> <td>65.00</td> <td>-13.71</td> <td>38.02</td> <td>30.86</td> <td>4.92</td> <td>33.51</td> <td>221</td> <td>40 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | cm | deg | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | 1 | 2462.00 | 94.47 | 65.00 | -13.71 | 38.02 | 30.86 | 4.92 | 33.51 | 221 | 40 AVERAGE |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | cm | deg | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2486.59 | 94.47 | 65.00 | -13.71 | 38.02 | 30.86 | 4.92 | 33.51 | 221 | 40 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | cm | deg | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2462.00 | 94.47 | 65.00 | -13.71 | 38.02 | 30.86 | 4.92 | 33.51 | 221 | 40 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 13 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|---|-------------|--------------|-------------|--------|--------|--------|--------|--------|------|-------|-------------|--------------|-------------|--|--|--|-----|--------|--------|----|------|------|----|----|---|---------|-------|-------|--------|-------|-------|------|-------|----|----|------|---|---------|-------|-------|--------|-------|-------|------|-------|----|----|------|---|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|--------------|-------------|--|--|--|-----|--------|--------|----|------|------|----|----|---|---------|-------|-------|--------|-------|-------|------|-------|----|----|------|---|---------|-------|-------|--------|-------|-------|------|-------|----|----|------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_802.11b_CH11_2462MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.00</td> <td>50.58</td> <td>74.00</td> <td>-23.42</td> <td>73.66</td> <td>34.40</td> <td>7.79</td> <td>65.27</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7386.00</td> <td>49.58</td> <td>74.00</td> <td>-24.42</td> <td>69.58</td> <td>35.42</td> <td>9.17</td> <td>64.59</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 4924.00 | 50.58 | 74.00 | -23.42 | 73.66 | 34.40 | 7.79 | 65.27 | -- | -- | Peak | 2 | 7386.00 | 49.58 | 74.00 | -24.42 | 69.58 | 35.42 | 9.17 | 64.59 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.00</td> <td>49.18</td> <td>74.00</td> <td>-24.82</td> <td>72.26</td> <td>34.40</td> <td>7.79</td> <td>65.27</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7386.00</td> <td>46.03</td> <td>74.00</td> <td>-27.97</td> <td>66.03</td> <td>35.42</td> <td>9.17</td> <td>64.59</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 4924.00 | 49.18 | 74.00 | -24.82 | 72.26 | 34.40 | 7.79 | 65.27 | -- | -- | Peak | 2 | 7386.00 | 46.03 | 74.00 | -27.97 | 66.03 | 35.42 | 9.17 | 64.59 | -- | -- | Peak |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 4924.00 | 50.58 | 74.00 | -23.42 | 73.66 | 34.40 | 7.79 | 65.27 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 7386.00 | 49.58 | 74.00 | -24.42 | 69.58 | 35.42 | 9.17 | 64.59 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 4924.00 | 49.18 | 74.00 | -24.82 | 72.26 | 34.40 | 7.79 | 65.27 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 7386.00 | 46.03 | 74.00 | -27.97 | 66.03 | 35.42 | 9.17 | 64.59 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 14 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|---|-------------|--------------|-------------|-------|--------|--------|------|------|------|-------|-------------|--------------|-------------|--|--|--------|-----|--------|--------|----|------|------|----|----|-----|-----------|-------|-------|--------|-------|-------|------|-------|----|------|---|-------|------|-----|-------|--------|------|------|--|------|-------|-------------|--------------|-------------|--|--|--------|-----|--------|--------|----|------|------|----|----|-----|-----------|-------|-------|--------|-------|-------|------|-------|----|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_802.11g_CH01_2412MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 4824.00</td> <td>40.28</td> <td>74.00</td> <td>-33.72</td> <td>63.50</td> <td>34.26</td> <td>7.75</td> <td>65.23</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line Margin | Level Factor | Loss Factor | | | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 4824.00 | 40.28 | 74.00 | -33.72 | 63.50 | 34.26 | 7.75 | 65.23 | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 4824.00</td> <td>41.19</td> <td>74.00</td> <td>-32.81</td> <td>64.41</td> <td>34.26</td> <td>7.75</td> <td>65.23</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line Margin | Level Factor | Loss Factor | | | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 4824.00 | 41.19 | 74.00 | -32.81 | 64.41 | 34.26 | 7.75 | 65.23 | -- |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 4824.00 | 40.28 | 74.00 | -33.72 | 63.50 | 34.26 | 7.75 | 65.23 | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 4824.00 | 41.19 | 74.00 | -32.81 | 64.41 | 34.26 | 7.75 | 65.23 | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 15 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|----------|-------------|-------------|-------------|-------|--------|--------|--------|---------|--------|--------|-----|--------|--------|----|------|------|----|----|----|-----|--|---|---------|-------|-------|--------|-------|-------|------|-------|----|---------|---|---------|-------|-------|--------|-------|-------|------|-------|----|---------|--|------|-------|-------|-------------|------|-----|-------|--------|------|------|--------|-----|--------|--------|----|------|------|----|----|----|-----|--|---|---------|-------|-------|--------|-------|-------|------|-------|----|---------|---|---------|-------|-------|--------|-------|-------|------|-------|----|---------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_802.11g_CH06_2437MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>41.33</td> <td>74.00</td> <td>-32.67</td> <td>64.48</td> <td>34.33</td> <td>7.77</td> <td>65.25</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>44.86</td> <td>74.00</td> <td>-29.14</td> <td>65.14</td> <td>35.44</td> <td>8.93</td> <td>64.65</td> <td>--</td> <td>-- Peak</td> </tr> </tbody> </table> | Freq | Level | Limit | Line Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | 1 | 4874.00 | 41.33 | 74.00 | -32.67 | 64.48 | 34.33 | 7.77 | 65.25 | -- | -- Peak | 2 | 7311.00 | 44.86 | 74.00 | -29.14 | 65.14 | 35.44 | 8.93 | 64.65 | -- | -- Peak | <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>42.47</td> <td>74.00</td> <td>-31.53</td> <td>65.62</td> <td>34.33</td> <td>7.77</td> <td>65.25</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>43.92</td> <td>74.00</td> <td>-30.08</td> <td>64.20</td> <td>35.44</td> <td>8.93</td> <td>64.65</td> <td>--</td> <td>-- Peak</td> </tr> </tbody> </table> | Freq | Level | Limit | Line Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | 1 | 4874.00 | 42.47 | 74.00 | -31.53 | 65.62 | 34.33 | 7.77 | 65.25 | -- | -- Peak | 2 | 7311.00 | 43.92 | 74.00 | -30.08 | 64.20 | 35.44 | 8.93 | 64.65 | -- | -- Peak |
| | Freq | Level | Limit | Line Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 4874.00 | 41.33 | 74.00 | -32.67 | 64.48 | 34.33 | 7.77 | 65.25 | -- | -- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 7311.00 | 44.86 | 74.00 | -29.14 | 65.14 | 35.44 | 8.93 | 64.65 | -- | -- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Limit | Line Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 4874.00 | 42.47 | 74.00 | -31.53 | 65.62 | 34.33 | 7.77 | 65.25 | -- | -- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 7311.00 | 43.92 | 74.00 | -30.08 | 64.20 | 35.44 | 8.93 | 64.65 | -- | -- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 16 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------|--------|--------|--------|--------|--------|--------|------|---------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|---|---------|-------|-------|-------|-------|-------|------|-------|-----|-----|---------|--|-------|------|-----|-------|--------|------|------|--------|------|-------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|---|---------|--------|-------|-------|--------|-------|------|-------|-----|-----|---------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_802.11g_CH11_2462MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.77</td> <td>65.52</td> <td>74.00</td> <td>-8.48</td> <td>63.26</td> <td>30.85</td> <td>4.92</td> <td>33.51</td> <td>175</td> <td>160</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 2483.77 | 65.52 | 74.00 | -8.48 | 63.26 | 30.85 | 4.92 | 33.51 | 175 | 160 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>102.15</td> <td>-----</td> <td>-----</td> <td>100.03</td> <td>30.76</td> <td>4.89</td> <td>33.53</td> <td>175</td> <td>160</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 2462.00 | 102.15 | ----- | ----- | 100.03 | 30.76 | 4.89 | 33.53 | 175 | 160 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2483.77 | 65.52 | 74.00 | -8.48 | 63.26 | 30.85 | 4.92 | 33.51 | 175 | 160 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2462.00 | 102.15 | ----- | ----- | 100.03 | 30.76 | 4.89 | 33.53 | 175 | 160 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.51</td> <td>49.24</td> <td>54.00</td> <td>-4.76</td> <td>46.98</td> <td>30.85</td> <td>4.92</td> <td>33.51</td> <td>175</td> <td>160</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 2483.51 | 49.24 | 54.00 | -4.76 | 46.98 | 30.85 | 4.92 | 33.51 | 175 | 160 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>94.91</td> <td>-----</td> <td>-----</td> <td>92.77</td> <td>30.77</td> <td>4.89</td> <td>33.52</td> <td>175</td> <td>160</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 2462.00 | 94.91 | ----- | ----- | 92.77 | 30.77 | 4.89 | 33.52 | 175 | 160 | AVERAGE |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2483.51 | 49.24 | 54.00 | -4.76 | 46.98 | 30.85 | 4.92 | 33.51 | 175 | 160 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2462.00 | 94.91 | ----- | ----- | 92.77 | 30.77 | 4.89 | 33.52 | 175 | 160 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 16 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------|--------|--------|--------|--------|--------|--------|------|---------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|---|---------|-------|-------|-------|-------|-------|------|-------|-----|-----|---------|--|-------|------|-----|-------|--------|------|------|--------|------|-------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|---|---------|--------|-------|-------|-------|-------|------|-------|-----|-----|---------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_802.11g_CH11_2462MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <p>Date: 2024-09-24</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.58</td> <td>64.57</td> <td>74.00</td> <td>-9.43</td> <td>62.31</td> <td>30.85</td> <td>4.92</td> <td>33.51</td> <td>191</td> <td>180</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 2483.58 | 64.57 | 74.00 | -9.43 | 62.31 | 30.85 | 4.92 | 33.51 | 191 | 180 | PEAK | <p>Date: 2024-09-24</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>100.84</td> <td>-----</td> <td>-----</td> <td>98.71</td> <td>30.77</td> <td>4.89</td> <td>33.53</td> <td>191</td> <td>180</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 2462.00 | 100.84 | ----- | ----- | 98.71 | 30.77 | 4.89 | 33.53 | 191 | 180 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2483.58 | 64.57 | 74.00 | -9.43 | 62.31 | 30.85 | 4.92 | 33.51 | 191 | 180 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2462.00 | 100.84 | ----- | ----- | 98.71 | 30.77 | 4.89 | 33.53 | 191 | 180 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <p>Date: 2024-09-24</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.58</td> <td>47.53</td> <td>54.00</td> <td>-6.47</td> <td>45.27</td> <td>30.85</td> <td>4.92</td> <td>33.51</td> <td>191</td> <td>180</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 2483.58 | 47.53 | 54.00 | -6.47 | 45.27 | 30.85 | 4.92 | 33.51 | 191 | 180 | AVERAGE | <p>Date: 2024-09-24</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>94.15</td> <td>-----</td> <td>-----</td> <td>92.01</td> <td>30.77</td> <td>4.89</td> <td>33.52</td> <td>191</td> <td>180</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 2462.00 | 94.15 | ----- | ----- | 92.01 | 30.77 | 4.89 | 33.52 | 191 | 180 | AVERAGE |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2483.58 | 47.53 | 54.00 | -6.47 | 45.27 | 30.85 | 4.92 | 33.51 | 191 | 180 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2462.00 | 94.15 | ----- | ----- | 92.01 | 30.77 | 4.89 | 33.52 | 191 | 180 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 16 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|-------------|-------|--------|-------------|--------|--------|--------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|---------|-------|-------|--------|-------|-------|------|-------|----|----|------|---|---------|-------|-------|--------|-------|-------|------|-------|----|----|------|--|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|---------|-------|-------|--------|-------|-------|------|-------|----|----|------|---|---------|-------|-------|--------|-------|-------|------|-------|----|----|------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_802.11g_CH11_2462MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.00</td> <td>42.23</td> <td>74.00</td> <td>-31.77</td> <td>65.31</td> <td>34.40</td> <td>7.79</td> <td>65.27</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7386.00</td> <td>44.01</td> <td>74.00</td> <td>-29.99</td> <td>64.01</td> <td>35.42</td> <td>9.17</td> <td>64.59</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 4924.00 | 42.23 | 74.00 | -31.77 | 65.31 | 34.40 | 7.79 | 65.27 | -- | -- | Peak | 2 | 7386.00 | 44.01 | 74.00 | -29.99 | 64.01 | 35.42 | 9.17 | 64.59 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.00</td> <td>42.55</td> <td>74.00</td> <td>-31.45</td> <td>65.63</td> <td>34.40</td> <td>7.79</td> <td>65.27</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7386.00</td> <td>42.79</td> <td>74.00</td> <td>-31.21</td> <td>62.79</td> <td>35.42</td> <td>9.17</td> <td>64.59</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 4924.00 | 42.55 | 74.00 | -31.45 | 65.63 | 34.40 | 7.79 | 65.27 | -- | -- | Peak | 2 | 7386.00 | 42.79 | 74.00 | -31.21 | 62.79 | 35.42 | 9.17 | 64.59 | -- | -- | Peak |
| | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 4924.00 | 42.23 | 74.00 | -31.77 | 65.31 | 34.40 | 7.79 | 65.27 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 7386.00 | 44.01 | 74.00 | -29.99 | 64.01 | 35.42 | 9.17 | 64.59 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 4924.00 | 42.55 | 74.00 | -31.45 | 65.63 | 34.40 | 7.79 | 65.27 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 7386.00 | 42.79 | 74.00 | -31.21 | 62.79 | 35.42 | 9.17 | 64.59 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 17 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------|--------|-------------|--------|--------|--------|-------------|--|------|-------|-------------|-------|--------|-------------|--|----|-----|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|--------|-------|-------|------|-------|-----|-------------|--|-------|------|-----|-------|--------|------|------|--------|--|------|-------|-------------|-------|--------|-------------|--|----|-----|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|------|-------|-----|----------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_802.11n HT20_CH01_2412MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>62.44</td> <td>-11.56</td> <td>60.60</td> <td>30.61</td> <td>4.80</td> <td>33.57</td> <td>100</td> <td>156 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 2389.95 | 62.44 | -11.56 | 60.60 | 30.61 | 4.80 | 33.57 | 100 | 156 PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>101.32</td> <td>-----</td> <td>99.41</td> <td>30.64</td> <td>4.82</td> <td>33.55</td> <td>100</td> <td>156 Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 2412.00 | 101.32 | ----- | 99.41 | 30.64 | 4.82 | 33.55 | 100 | 156 Peak |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2389.95 | 62.44 | -11.56 | 60.60 | 30.61 | 4.80 | 33.57 | 100 | 156 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2412.00 | 101.32 | ----- | 99.41 | 30.64 | 4.82 | 33.55 | 100 | 156 Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>46.73</td> <td>-7.27</td> <td>44.89</td> <td>30.61</td> <td>4.80</td> <td>33.57</td> <td>100</td> <td>156 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 2389.95 | 46.73 | -7.27 | 44.89 | 30.61 | 4.80 | 33.57 | 100 | 156 AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>94.42</td> <td>-----</td> <td>92.51</td> <td>30.64</td> <td>4.82</td> <td>33.55</td> <td>100</td> <td>156 Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 2412.00 | 94.42 | ----- | 92.51 | 30.64 | 4.82 | 33.55 | 100 | 156 Peak |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2389.95 | 46.73 | -7.27 | 44.89 | 30.61 | 4.80 | 33.57 | 100 | 156 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2412.00 | 94.42 | ----- | 92.51 | 30.64 | 4.82 | 33.55 | 100 | 156 Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 17 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|-------|--------|-------------|--------|--------|--------|--------|-----|---------|-------|-------------|-------|--------|-------------|--|----|-----|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|-----|---------|---|-------|------|-----|-------|--------|------|------|--------|--|------|-------|-------------|-------|--------|-------------|--|----|-----|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|-------|-------|-------|------|-------|-----|-----|------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_802.11n HT20_CH01_2412MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.43</td> <td>62.76</td> <td>74.00</td> <td>-11.24</td> <td>60.92</td> <td>30.61</td> <td>4.80</td> <td>33.57</td> <td>200</td> <td>163</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 2389.43 | 62.76 | 74.00 | -11.24 | 60.92 | 30.61 | 4.80 | 33.57 | 200 | 163 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>99.79</td> <td>-----</td> <td>-----</td> <td>97.88</td> <td>30.64</td> <td>4.82</td> <td>33.55</td> <td>200</td> <td>163</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 2412.00 | 99.79 | ----- | ----- | 97.88 | 30.64 | 4.82 | 33.55 | 200 | 163 | Peak |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2389.43 | 62.76 | 74.00 | -11.24 | 60.92 | 30.61 | 4.80 | 33.57 | 200 | 163 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2412.00 | 99.79 | ----- | ----- | 97.88 | 30.64 | 4.82 | 33.55 | 200 | 163 | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>44.81</td> <td>54.00</td> <td>-9.19</td> <td>42.97</td> <td>30.61</td> <td>4.80</td> <td>33.57</td> <td>200</td> <td>163</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 2389.95 | 44.81 | 54.00 | -9.19 | 42.97 | 30.61 | 4.80 | 33.57 | 200 | 163 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>91.91</td> <td>-----</td> <td>-----</td> <td>90.00</td> <td>30.64</td> <td>4.82</td> <td>33.55</td> <td>200</td> <td>163</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 2412.00 | 91.91 | ----- | ----- | 90.00 | 30.64 | 4.82 | 33.55 | 200 | 163 | Peak |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2389.95 | 44.81 | 54.00 | -9.19 | 42.97 | 30.61 | 4.80 | 33.57 | 200 | 163 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2412.00 | 91.91 | ----- | ----- | 90.00 | 30.64 | 4.82 | 33.55 | 200 | 163 | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |







| Mode | 17 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|-------------|--------------|-------------|-------|--------|--------|------------|--------|--|------|-------|-------------|--------------|-------------|--|--|----|-----|-----|--------|--------|----|------|------|----|----|-----|-----------|-------|-------|--------|-------|-------|------|-------|------------|--|-------|------|-----|-------|--------|------|------|--------|--|------|-------|-------------|--------------|-------------|--|--|----|-----|-----|--------|--------|----|------|------|----|----|-----|-----------|-------|-------|--------|-------|-------|------|-------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_802.11n HT20_CH01_2412MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 4824.00</td> <td>42.39</td> <td>74.00</td> <td>-31.61</td> <td>65.61</td> <td>34.26</td> <td>7.75</td> <td>65.23</td> <td>-- -- Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | Freq | Level | Line Margin | Level Factor | Loss Factor | | | cm | deg | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 4824.00 | 42.39 | 74.00 | -31.61 | 65.61 | 34.26 | 7.75 | 65.23 | -- -- Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 4824.00</td> <td>42.05</td> <td>74.00</td> <td>-31.95</td> <td>65.27</td> <td>34.26</td> <td>7.75</td> <td>65.23</td> <td>-- -- Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | Freq | Level | Line Margin | Level Factor | Loss Factor | | | cm | deg | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 4824.00 | 42.05 | 74.00 | -31.95 | 65.27 | 34.26 | 7.75 | 65.23 |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 4824.00 | 42.39 | 74.00 | -31.61 | 65.61 | 34.26 | 7.75 | 65.23 | -- -- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 4824.00 | 42.05 | 74.00 | -31.95 | 65.27 | 34.26 | 7.75 | 65.23 | -- -- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 18 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|---|-------------|--------------|-------------|--------|--------|--------|--------|--------|------|-------|-------------|--------------|-------------|--|--|--|-----|--------|--------|----|------|------|----|----|---|---------|-------|-------|--------|-------|-------|------|-------|----|----|------|---|---------|-------|-------|--------|-------|-------|------|-------|----|----|------|---|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|--------------|-------------|--|--|--|-----|--------|--------|----|------|------|----|----|---|---------|-------|-------|--------|-------|-------|------|-------|----|----|------|---|---------|-------|-------|--------|-------|-------|------|-------|----|----|------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_802.11n HT20_CH06_2437MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>42.30</td> <td>74.00</td> <td>-31.70</td> <td>65.45</td> <td>34.33</td> <td>7.77</td> <td>65.25</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>43.58</td> <td>74.00</td> <td>-30.42</td> <td>63.86</td> <td>35.44</td> <td>8.93</td> <td>64.65</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 4874.00 | 42.30 | 74.00 | -31.70 | 65.45 | 34.33 | 7.77 | 65.25 | -- | -- | Peak | 2 | 7311.00 | 43.58 | 74.00 | -30.42 | 63.86 | 35.44 | 8.93 | 64.65 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>41.56</td> <td>74.00</td> <td>-32.44</td> <td>64.71</td> <td>34.33</td> <td>7.77</td> <td>65.25</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>42.50</td> <td>74.00</td> <td>-31.50</td> <td>62.78</td> <td>35.44</td> <td>8.93</td> <td>64.65</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 4874.00 | 41.56 | 74.00 | -32.44 | 64.71 | 34.33 | 7.77 | 65.25 | -- | -- | Peak | 2 | 7311.00 | 42.50 | 74.00 | -31.50 | 62.78 | 35.44 | 8.93 | 64.65 | -- | -- | Peak |
| | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 4874.00 | 42.30 | 74.00 | -31.70 | 65.45 | 34.33 | 7.77 | 65.25 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 7311.00 | 43.58 | 74.00 | -30.42 | 63.86 | 35.44 | 8.93 | 64.65 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 4874.00 | 41.56 | 74.00 | -32.44 | 64.71 | 34.33 | 7.77 | 65.25 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 7311.00 | 42.50 | 74.00 | -31.50 | 62.78 | 35.44 | 8.93 | 64.65 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

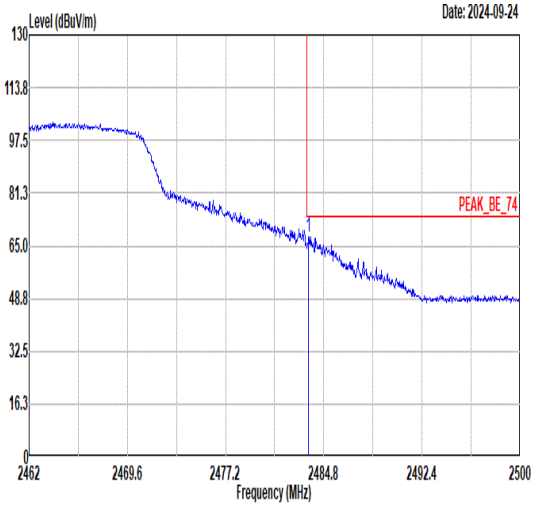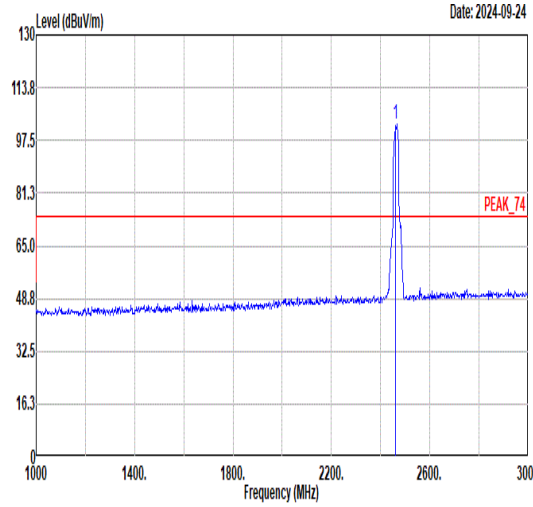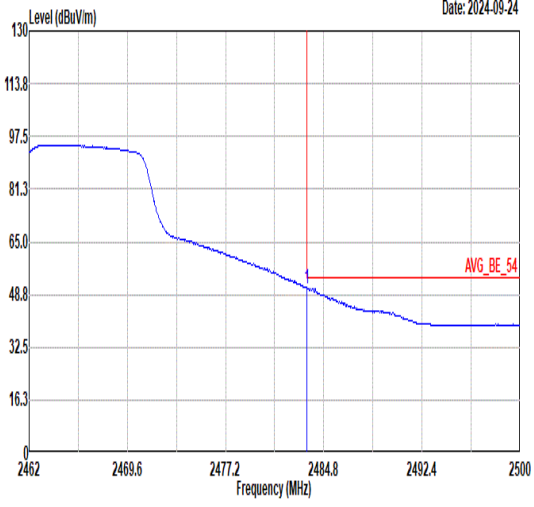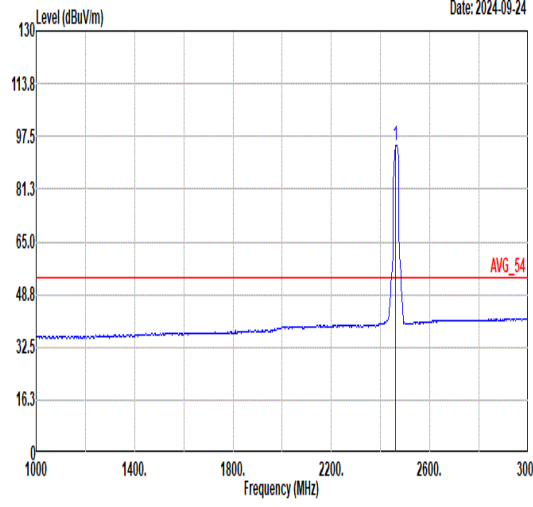

| Mode | 19 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|-------------|-------|--------|-------------|--------|--------|--------|--------|------|---------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|---------|-------|-------|-------|-------|-------|------|-------|-----|----|---------|--|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|---------|--------|-------|-------|--------|-------|------|-------|-----|----|---------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_802.11n HT20_CH11_2462MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <p>Date: 2024-09-24</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.62</td> <td>67.92</td> <td>74.00</td> <td>-6.08</td> <td>65.66</td> <td>30.85</td> <td>4.92</td> <td>33.51</td> <td>100</td> <td>30</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 2483.62 | 67.92 | 74.00 | -6.08 | 65.66 | 30.85 | 4.92 | 33.51 | 100 | 30 | PEAK |  <p>Date: 2024-09-24</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>102.36</td> <td>-----</td> <td>-----</td> <td>100.20</td> <td>30.78</td> <td>4.90</td> <td>33.52</td> <td>100</td> <td>30</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 2462.00 | 102.36 | ----- | ----- | 100.20 | 30.78 | 4.90 | 33.52 | 100 | 30 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2483.62 | 67.92 | 74.00 | -6.08 | 65.66 | 30.85 | 4.92 | 33.51 | 100 | 30 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2462.00 | 102.36 | ----- | ----- | 100.20 | 30.78 | 4.90 | 33.52 | 100 | 30 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  <p>Date: 2024-09-24</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.51</td> <td>50.64</td> <td>54.00</td> <td>-3.36</td> <td>48.38</td> <td>30.85</td> <td>4.92</td> <td>33.51</td> <td>100</td> <td>30</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 2483.51 | 50.64 | 54.00 | -3.36 | 48.38 | 30.85 | 4.92 | 33.51 | 100 | 30 | AVERAGE |  <p>Date: 2024-09-24</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>94.77</td> <td>-----</td> <td>-----</td> <td>92.63</td> <td>30.77</td> <td>4.89</td> <td>33.52</td> <td>100</td> <td>30</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 2462.00 | 94.77 | ----- | ----- | 92.63 | 30.77 | 4.89 | 33.52 | 100 | 30 | AVERAGE |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2483.51 | 50.64 | 54.00 | -3.36 | 48.38 | 30.85 | 4.92 | 33.51 | 100 | 30 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2462.00 | 94.77 | ----- | ----- | 92.63 | 30.77 | 4.89 | 33.52 | 100 | 30 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 19 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|-------------|--------|--------|--------|--------|--------|--------|------|-------|---------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|-------|-------|-------|------|-------|-----|-----|---------|---|-------|------|-----|-------|--------|------|------|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|-------|-------|-------|------|-------|-----|-----|---------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_802.11n HT20_CH11_2462MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.77</td> <td>65.82</td> <td>74.00</td> <td>-8.18</td> <td>63.56</td> <td>30.85</td> <td>4.92</td> <td>33.51</td> <td>184</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 2483.77 | 65.82 | 74.00 | -8.18 | 63.56 | 30.85 | 4.92 | 33.51 | 184 | 360 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>99.74</td> <td>74.00</td> <td>25.74</td> <td>97.60</td> <td>30.77</td> <td>4.89</td> <td>33.52</td> <td>184</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 2462.00 | 99.74 | 74.00 | 25.74 | 97.60 | 30.77 | 4.89 | 33.52 | 184 | 360 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2483.77 | 65.82 | 74.00 | -8.18 | 63.56 | 30.85 | 4.92 | 33.51 | 184 | 360 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2462.00 | 99.74 | 74.00 | 25.74 | 97.60 | 30.77 | 4.89 | 33.52 | 184 | 360 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.55</td> <td>48.40</td> <td>54.00</td> <td>-5.60</td> <td>46.14</td> <td>30.85</td> <td>4.92</td> <td>33.51</td> <td>184</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 2483.55 | 48.40 | 54.00 | -5.60 | 46.14 | 30.85 | 4.92 | 33.51 | 184 | 360 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>92.42</td> <td>74.00</td> <td>18.42</td> <td>90.26</td> <td>30.78</td> <td>4.90</td> <td>33.52</td> <td>184</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 2462.00 | 92.42 | 74.00 | 18.42 | 90.26 | 30.78 | 4.90 | 33.52 | 184 | 360 | AVERAGE |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2483.55 | 48.40 | 54.00 | -5.60 | 46.14 | 30.85 | 4.92 | 33.51 | 184 | 360 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2462.00 | 92.42 | 74.00 | 18.42 | 90.26 | 30.78 | 4.90 | 33.52 | 184 | 360 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 19 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|---|-------------|--------|--------|-------------|--------|-------|------|----|------|------|-------|-------------|-------|--------|-------------|--|----|-----|---------|-------|-------|--------|-------|-------|------|-------|----|----|------|---------|-------|-------|--------|-------|-------|------|-------|----|----|------|---|-------|------|-----|-------|--------|------|------|--|--|------|-------|-------------|-------|--------|-------------|--|----|-----|---------|-------|-------|--------|-------|-------|------|-------|----|----|------|---------|-------|-------|--------|-------|-------|------|-------|----|----|------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_802.11n_HT20_CH11_2462MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>4924.00</td> <td>41.17</td> <td>74.00</td> <td>-32.83</td> <td>64.25</td> <td>34.40</td> <td>7.79</td> <td>65.27</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>7386.00</td> <td>42.93</td> <td>74.00</td> <td>-31.07</td> <td>62.93</td> <td>35.42</td> <td>9.17</td> <td>64.59</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | | | Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | 4924.00 | 41.17 | 74.00 | -32.83 | 64.25 | 34.40 | 7.79 | 65.27 | -- | -- | Peak | 7386.00 | 42.93 | 74.00 | -31.07 | 62.93 | 35.42 | 9.17 | 64.59 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>4924.00</td> <td>41.14</td> <td>74.00</td> <td>-32.86</td> <td>64.22</td> <td>34.40</td> <td>7.79</td> <td>65.27</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>7386.00</td> <td>42.49</td> <td>74.00</td> <td>-31.51</td> <td>62.49</td> <td>35.42</td> <td>9.17</td> <td>64.59</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | | | Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | 4924.00 | 41.14 | 74.00 | -32.86 | 64.22 | 34.40 | 7.79 | 65.27 | -- | -- | Peak | 7386.00 | 42.49 | 74.00 | -31.51 | 62.49 | 35.42 | 9.17 | 64.59 | -- | -- | Peak |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4924.00 | 41.17 | 74.00 | -32.83 | 64.25 | 34.40 | 7.79 | 65.27 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7386.00 | 42.93 | 74.00 | -31.07 | 62.93 | 35.42 | 9.17 | 64.59 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4924.00 | 41.14 | 74.00 | -32.86 | 64.22 | 34.40 | 7.79 | 65.27 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7386.00 | 42.49 | 74.00 | -31.51 | 62.49 | 35.42 | 9.17 | 64.59 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 20 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|-------------|--------|--------|--------|--------|--------|-------|------|------------|------|--------|-------|--------|------|--------|------|------|--------|-----|--------|--------|----|------|------|----|----|----|-----|--|---|---------|-------|-------|--------|-------|-------|------|-------|-----|------------|--|-------|------|-----|-------|--------|------|------|------|-------|------|--------|-------|--------|------|--------|------|------|--------|-----|--------|--------|----|------|------|----|----|----|-----|--|---|---------|-------|-------|-------|-------|-------|------|-------|-----|---------|
| | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_802.11n HT40_CH03_2422MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.74</td> <td>56.74</td> <td>74.00</td> <td>-17.26</td> <td>54.91</td> <td>30.61</td> <td>4.79</td> <td>33.57</td> <td>100</td> <td>23 PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | APos | TPos | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | 1 | 2388.74 | 56.74 | 74.00 | -17.26 | 54.91 | 30.61 | 4.79 | 33.57 | 100 | 23 PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2422.00</td> <td>98.90</td> <td>74.00</td> <td>24.90</td> <td>96.97</td> <td>30.65</td> <td>4.83</td> <td>33.55</td> <td>100</td> <td>23 Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | APos | TPos | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | 1 | 2422.00 | 98.90 | 74.00 | 24.90 | 96.97 | 30.65 | 4.83 | 33.55 | 100 | 23 Peak |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2388.74 | 56.74 | 74.00 | -17.26 | 54.91 | 30.61 | 4.79 | 33.57 | 100 | 23 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2422.00 | 98.90 | 74.00 | 24.90 | 96.97 | 30.65 | 4.83 | 33.55 | 100 | 23 Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.97</td> <td>44.25</td> <td>54.00</td> <td>-9.75</td> <td>42.41</td> <td>30.61</td> <td>4.80</td> <td>33.57</td> <td>100</td> <td>23 AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | APos | TPos | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | 1 | 2389.97 | 44.25 | 54.00 | -9.75 | 42.41 | 30.61 | 4.80 | 33.57 | 100 | 23 AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2422.00</td> <td>91.39</td> <td>54.00</td> <td>37.39</td> <td>89.46</td> <td>30.65</td> <td>4.83</td> <td>33.55</td> <td>100</td> <td>23 Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | APos | TPos | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | 1 | 2422.00 | 91.39 | 54.00 | 37.39 | 89.46 | 30.65 | 4.83 | 33.55 | 100 | 23 Peak |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2389.97 | 44.25 | 54.00 | -9.75 | 42.41 | 30.61 | 4.80 | 33.57 | 100 | 23 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2422.00 | 91.39 | 54.00 | 37.39 | 89.46 | 30.65 | 4.83 | 33.55 | 100 | 23 Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 20 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------|--------|--------|--------|--------|-------|--------|------|---------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|----|---------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_802.11n HT40_CH03_2422MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <p>Date: 2024-09-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.48</td> <td>54.41</td> <td>74.00</td> <td>-19.59</td> <td>52.15</td> <td>30.85</td> <td>4.92</td> <td>33.51</td> <td>100</td> <td>23</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 2484.48 | 54.41 | 74.00 | -19.59 | 52.15 | 30.85 | 4.92 | 33.51 | 100 | 23 | PEAK | Blank |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2484.48 | 54.41 | 74.00 | -19.59 | 52.15 | 30.85 | 4.92 | 33.51 | 100 | 23 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <p>Date: 2024-09-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.70</td> <td>41.69</td> <td>54.00</td> <td>-12.31</td> <td>39.43</td> <td>30.85</td> <td>4.92</td> <td>33.51</td> <td>100</td> <td>23</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 2483.70 | 41.69 | 54.00 | -12.31 | 39.43 | 30.85 | 4.92 | 33.51 | 100 | 23 | AVERAGE | Blank |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2483.70 | 41.69 | 54.00 | -12.31 | 39.43 | 30.85 | 4.92 | 33.51 | 100 | 23 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | |







| Mode | 20 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|-------------|--------|--------|--------|--------|--------|--------|--------|------|---------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|-----|---------|--|-------|------|-----|-------|--------|------|------|--------|------|-------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|---|---------|-------|-------|-------|-------|-------|------|-------|-----|-----|---------|
| | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_802.11n HT40_CH03_2422MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.63</td> <td>57.50</td> <td>74.00</td> <td>-16.50</td> <td>55.66</td> <td>30.61</td> <td>4.80</td> <td>33.57</td> <td>200</td> <td>166</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 2389.63 | 57.50 | 74.00 | -16.50 | 55.66 | 30.61 | 4.80 | 33.57 | 200 | 166 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2422.00</td> <td>95.89</td> <td>74.00</td> <td>21.89</td> <td>93.92</td> <td>30.67</td> <td>4.84</td> <td>33.54</td> <td>200</td> <td>166</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 2422.00 | 95.89 | 74.00 | 21.89 | 93.92 | 30.67 | 4.84 | 33.54 | 200 | 166 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2389.63 | 57.50 | 74.00 | -16.50 | 55.66 | 30.61 | 4.80 | 33.57 | 200 | 166 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2422.00 | 95.89 | 74.00 | 21.89 | 93.92 | 30.67 | 4.84 | 33.54 | 200 | 166 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.97</td> <td>43.50</td> <td>54.00</td> <td>-10.50</td> <td>41.66</td> <td>30.61</td> <td>4.80</td> <td>33.57</td> <td>200</td> <td>166</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 2389.97 | 43.50 | 54.00 | -10.50 | 41.66 | 30.61 | 4.80 | 33.57 | 200 | 166 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2422.00</td> <td>88.28</td> <td>54.00</td> <td>34.28</td> <td>86.30</td> <td>30.67</td> <td>4.85</td> <td>33.54</td> <td>200</td> <td>166</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 2422.00 | 88.28 | 54.00 | 34.28 | 86.30 | 30.67 | 4.85 | 33.54 | 200 | 166 | AVERAGE |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2389.97 | 43.50 | 54.00 | -10.50 | 41.66 | 30.61 | 4.80 | 33.57 | 200 | 166 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2422.00 | 88.28 | 54.00 | 34.28 | 86.30 | 30.67 | 4.85 | 33.54 | 200 | 166 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 20 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|-------------|--------|--------|--------|--------|--------|-------|--------|------|---------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|-----|---------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_802.11n HT40_CH03_2422MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2486.74</td> <td>52.37</td> <td>74.00</td> <td>-21.63</td> <td>50.10</td> <td>30.86</td> <td>4.92</td> <td>33.51</td> <td>200</td> <td>166</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 2486.74 | 52.37 | 74.00 | -21.63 | 50.10 | 30.86 | 4.92 | 33.51 | 200 | 166 | PEAK | Blank |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2486.74 | 52.37 | 74.00 | -21.63 | 50.10 | 30.86 | 4.92 | 33.51 | 200 | 166 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2486.12</td> <td>40.87</td> <td>54.00</td> <td>-13.13</td> <td>38.60</td> <td>30.86</td> <td>4.92</td> <td>33.51</td> <td>200</td> <td>166</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 2486.12 | 40.87 | 54.00 | -13.13 | 38.60 | 30.86 | 4.92 | 33.51 | 200 | 166 | AVERAGE | Blank |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2486.12 | 40.87 | 54.00 | -13.13 | 38.60 | 30.86 | 4.92 | 33.51 | 200 | 166 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | |

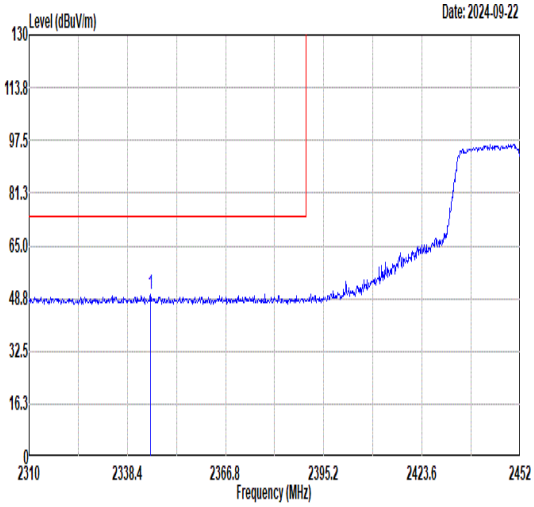
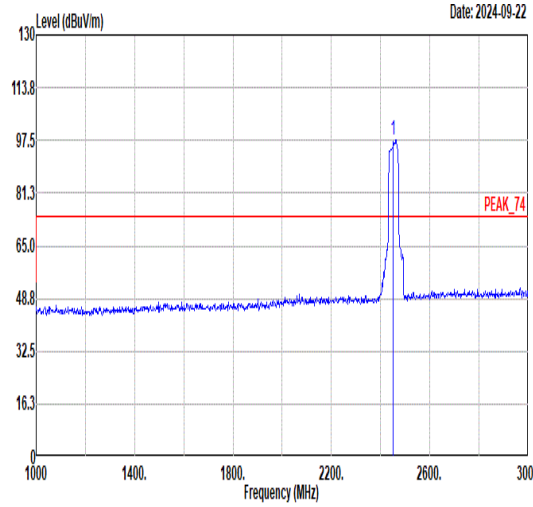
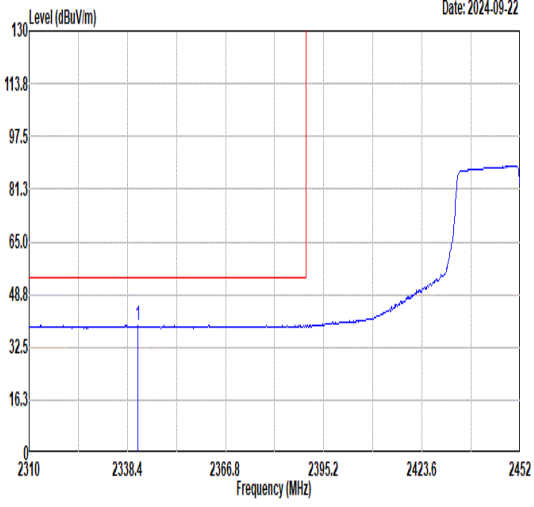
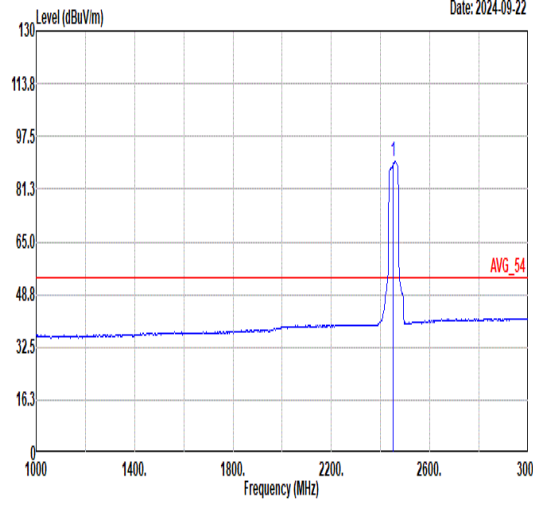


| Mode | 21 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------|--------|--------|--------|--------|-------|-----|------|---------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|----|---------|--|-------|------|-----|-------|--------|------|------|--|------|-------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|---|---------|-------|-------|-------|-------|-------|------|-------|-----|----|---------|
| | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_802.11n_HT40_CH09_2452MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <p>Date: 2024-09-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2345.07</td> <td>50.03</td> <td>74.00</td> <td>-23.97</td> <td>48.17</td> <td>30.70</td> <td>4.75</td> <td>33.59</td> <td>100</td> <td>36</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 2345.07 | 50.03 | 74.00 | -23.97 | 48.17 | 30.70 | 4.75 | 33.59 | 100 | 36 | PEAK |  <p>Date: 2024-09-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2452.00</td> <td>97.57</td> <td>-----</td> <td>-----</td> <td>95.43</td> <td>30.77</td> <td>4.89</td> <td>33.52</td> <td>100</td> <td>36</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 2452.00 | 97.57 | ----- | ----- | 95.43 | 30.77 | 4.89 | 33.52 | 100 | 36 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2345.07 | 50.03 | 74.00 | -23.97 | 48.17 | 30.70 | 4.75 | 33.59 | 100 | 36 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2452.00 | 97.57 | ----- | ----- | 95.43 | 30.77 | 4.89 | 33.52 | 100 | 36 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  <p>Date: 2024-09-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2341.52</td> <td>39.20</td> <td>54.00</td> <td>-14.80</td> <td>37.35</td> <td>30.70</td> <td>4.75</td> <td>33.60</td> <td>100</td> <td>36</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 2341.52 | 39.20 | 54.00 | -14.80 | 37.35 | 30.70 | 4.75 | 33.60 | 100 | 36 | AVERAGE |  <p>Date: 2024-09-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2452.00</td> <td>89.57</td> <td>-----</td> <td>-----</td> <td>87.45</td> <td>30.76</td> <td>4.89</td> <td>33.53</td> <td>100</td> <td>36</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 2452.00 | 89.57 | ----- | ----- | 87.45 | 30.76 | 4.89 | 33.53 | 100 | 36 | AVERAGE |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2341.52 | 39.20 | 54.00 | -14.80 | 37.35 | 30.70 | 4.75 | 33.60 | 100 | 36 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2452.00 | 89.57 | ----- | ----- | 87.45 | 30.76 | 4.89 | 33.53 | 100 | 36 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 21 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------|--|-------------|-------------|------------|--------------|-------------|--------------|-------------|------------|------|--------|-----|--------|--------|----|------|------|----|----|----|-----|-----------|-------|-------|-------|-------|-------|------|-------|-----|------------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_802.11n HT40_CH09_2452MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <p>Date: 2024-09-22</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Factor</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2486.90</td> <td>65.33</td> <td>74.00</td> <td>-8.67</td> <td>63.06</td> <td>30.86</td> <td>4.92</td> <td>33.51</td> <td>100</td> <td>36 PEAK</td> </tr> </tbody> </table> | Limit Freq | Limit Level | Read Level | Line Margin | Ant Level | Cable Factor | Preamp Loss | APos | TPos | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 2486.90 | 65.33 | 74.00 | -8.67 | 63.06 | 30.86 | 4.92 | 33.51 | 100 | 36 PEAK | Blank |
| Limit Freq | Limit Level | Read Level | Line Margin | Ant Level | Cable Factor | Preamp Loss | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | |
| 1 2486.90 | 65.33 | 74.00 | -8.67 | 63.06 | 30.86 | 4.92 | 33.51 | 100 | 36 PEAK | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <p>Date: 2024-09-22</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Factor</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2483.54</td> <td>50.43</td> <td>54.00</td> <td>-3.57</td> <td>48.17</td> <td>30.85</td> <td>4.92</td> <td>33.51</td> <td>100</td> <td>36 AVERAGE</td> </tr> </tbody> </table> | Limit Freq | Limit Level | Read Level | Line Margin | Ant Level | Cable Factor | Preamp Loss | APos | TPos | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 2483.54 | 50.43 | 54.00 | -3.57 | 48.17 | 30.85 | 4.92 | 33.51 | 100 | 36 AVERAGE | Blank |
| Limit Freq | Limit Level | Read Level | Line Margin | Ant Level | Cable Factor | Preamp Loss | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | |
| 1 2483.54 | 50.43 | 54.00 | -3.57 | 48.17 | 30.85 | 4.92 | 33.51 | 100 | 36 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | |

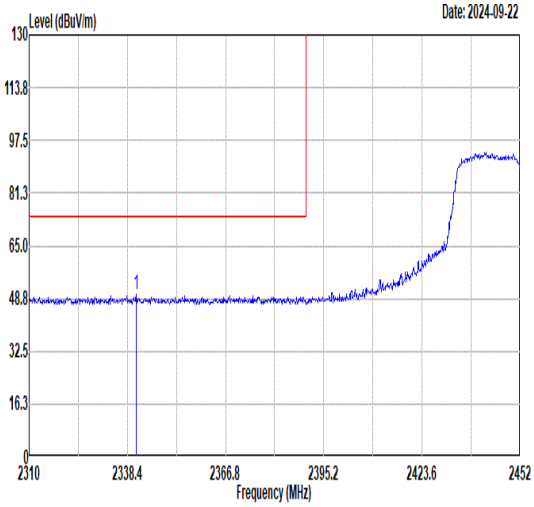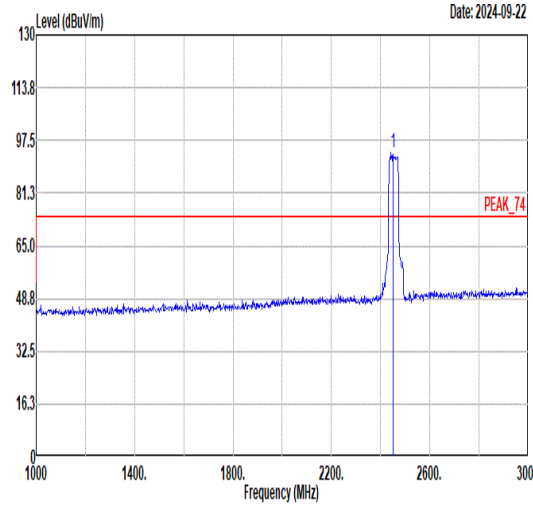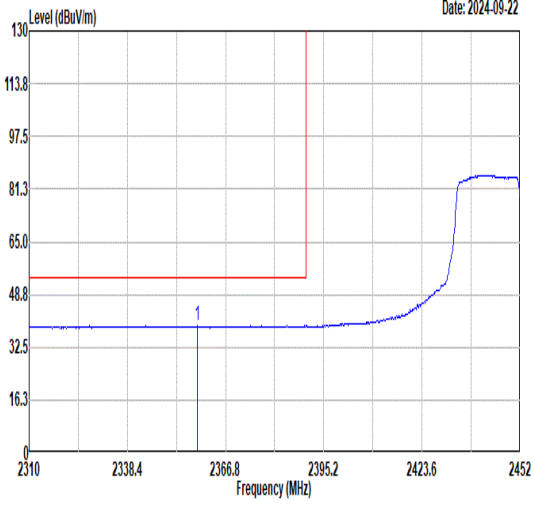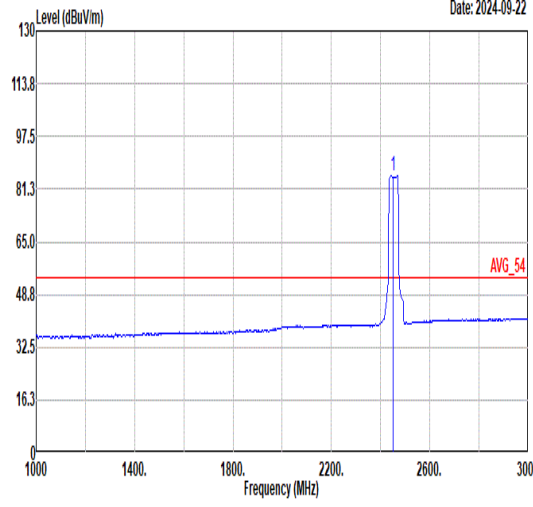

| Mode | 21 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------|--------|--------|--------|--------|-------|-----|------|---------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|----|---------|--|-------|------|-----|-------|--------|------|------|--|------|-------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|---|---------|-------|-------|-------|-------|-------|------|-------|-----|----|---------|
| | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_802.11n HT40_CH09_2452MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <p>Date: 2024-09-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2340.96</td> <td>49.84</td> <td>74.00</td> <td>-24.16</td> <td>47.99</td> <td>30.70</td> <td>4.75</td> <td>33.60</td> <td>200</td> <td>24</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 2340.96 | 49.84 | 74.00 | -24.16 | 47.99 | 30.70 | 4.75 | 33.60 | 200 | 24 | PEAK |  <p>Date: 2024-09-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2452.00</td> <td>93.56</td> <td>-----</td> <td>-----</td> <td>91.55</td> <td>30.69</td> <td>4.86</td> <td>33.54</td> <td>200</td> <td>24</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 2452.00 | 93.56 | ----- | ----- | 91.55 | 30.69 | 4.86 | 33.54 | 200 | 24 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2340.96 | 49.84 | 74.00 | -24.16 | 47.99 | 30.70 | 4.75 | 33.60 | 200 | 24 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2452.00 | 93.56 | ----- | ----- | 91.55 | 30.69 | 4.86 | 33.54 | 200 | 24 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  <p>Date: 2024-09-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2358.71</td> <td>39.11</td> <td>54.00</td> <td>-14.89</td> <td>37.27</td> <td>30.67</td> <td>4.76</td> <td>33.59</td> <td>200</td> <td>24</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 2358.71 | 39.11 | 54.00 | -14.89 | 37.27 | 30.67 | 4.76 | 33.59 | 200 | 24 | AVERAGE |  <p>Date: 2024-09-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2452.00</td> <td>85.46</td> <td>-----</td> <td>-----</td> <td>83.45</td> <td>30.69</td> <td>4.86</td> <td>33.54</td> <td>200</td> <td>24</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 2452.00 | 85.46 | ----- | ----- | 83.45 | 30.69 | 4.86 | 33.54 | 200 | 24 | AVERAGE |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2358.71 | 39.11 | 54.00 | -14.89 | 37.27 | 30.67 | 4.76 | 33.59 | 200 | 24 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2452.00 | 85.46 | ----- | ----- | 83.45 | 30.69 | 4.86 | 33.54 | 200 | 24 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 21 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|-------------|--------|--------|--------|--------|--------|-------|--------|------|---------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|----|---------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_802.11n HT40_CH09_2452MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <p>Date: 2024-09-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2485.79</td> <td>63.53</td> <td>74.00</td> <td>-10.47</td> <td>61.26</td> <td>30.86</td> <td>4.92</td> <td>33.51</td> <td>200</td> <td>24</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 2485.79 | 63.53 | 74.00 | -10.47 | 61.26 | 30.86 | 4.92 | 33.51 | 200 | 24 | PEAK | Blank |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2485.79 | 63.53 | 74.00 | -10.47 | 61.26 | 30.86 | 4.92 | 33.51 | 200 | 24 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <p>Date: 2024-09-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.26</td> <td>48.44</td> <td>54.00</td> <td>-5.56</td> <td>46.18</td> <td>30.85</td> <td>4.92</td> <td>33.51</td> <td>200</td> <td>24</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 2484.26 | 48.44 | 54.00 | -5.56 | 46.18 | 30.85 | 4.92 | 33.51 | 200 | 24 | AVERAGE | Blank |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2484.26 | 48.44 | 54.00 | -5.56 | 46.18 | 30.85 | 4.92 | 33.51 | 200 | 24 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 22 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|----------|--------|--------|--------|-------|--------|--------|------|-----|------|-------|------|--------|-------|--------|------|--------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|-------|-------|-------|--------|-------|-------|------|-------|----|----|------|---|--------|-------|-------|--------|-------|-------|------|-------|----|----|------|---|--------|-------|-------|--------|-------|-------|------|-------|----|----|------|---|--------|-------|-------|--------|-------|-------|------|-------|----|----|------|---|--------|-------|-------|--------|-------|-------|------|-------|----|----|------|---|--------|-------|-------|--------|-------|-------|------|-------|----|----|------|--|--|-------|------|-----|-------|--------|------|------|--|------|-------|------|--------|-------|--------|------|--------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|-------|-------|-------|--------|-------|-------|------|-------|----|----|------|---|--------|-------|-------|--------|-------|-------|------|-------|----|----|------|---|--------|-------|-------|--------|-------|-------|------|-------|----|----|------|---|--------|-------|-------|--------|-------|-------|------|-------|----|----|------|---|--------|-------|-------|--------|-------|-------|------|-------|----|----|------|---|--------|-------|-------|--------|-------|-------|------|-------|----|----|
| | LF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_802.11n HT20_CH11_LF_2462MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>46.49</td> <td>22.87</td> <td>40.00</td> <td>-17.13</td> <td>37.56</td> <td>19.62</td> <td>0.69</td> <td>35.00</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>115.36</td> <td>24.92</td> <td>43.50</td> <td>-18.58</td> <td>42.39</td> <td>16.16</td> <td>1.14</td> <td>34.77</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>142.52</td> <td>25.81</td> <td>43.50</td> <td>-17.69</td> <td>40.93</td> <td>18.35</td> <td>1.25</td> <td>34.72</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>265.71</td> <td>28.40</td> <td>46.00</td> <td>-17.60</td> <td>43.32</td> <td>18.06</td> <td>1.69</td> <td>34.67</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>5</td> <td>349.13</td> <td>30.91</td> <td>46.00</td> <td>-15.09</td> <td>43.37</td> <td>20.20</td> <td>1.94</td> <td>34.60</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>6</td> <td>859.35</td> <td>29.78</td> <td>46.00</td> <td>-16.22</td> <td>32.20</td> <td>28.77</td> <td>3.11</td> <td>34.30</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 46.49 | 22.87 | 40.00 | -17.13 | 37.56 | 19.62 | 0.69 | 35.00 | -- | -- | Peak | 2 | 115.36 | 24.92 | 43.50 | -18.58 | 42.39 | 16.16 | 1.14 | 34.77 | -- | -- | Peak | 3 | 142.52 | 25.81 | 43.50 | -17.69 | 40.93 | 18.35 | 1.25 | 34.72 | -- | -- | Peak | 4 | 265.71 | 28.40 | 46.00 | -17.60 | 43.32 | 18.06 | 1.69 | 34.67 | -- | -- | Peak | 5 | 349.13 | 30.91 | 46.00 | -15.09 | 43.37 | 20.20 | 1.94 | 34.60 | -- | -- | Peak | 6 | 859.35 | 29.78 | 46.00 | -16.22 | 32.20 | 28.77 | 3.11 | 34.30 | -- | -- | Peak | <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>33.88</td> <td>21.98</td> <td>40.00</td> <td>-18.02</td> <td>37.82</td> <td>18.46</td> <td>0.57</td> <td>34.87</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>112.45</td> <td>22.80</td> <td>43.50</td> <td>-20.70</td> <td>40.54</td> <td>15.92</td> <td>1.12</td> <td>34.78</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>141.55</td> <td>25.03</td> <td>43.50</td> <td>-18.47</td> <td>40.23</td> <td>18.27</td> <td>1.25</td> <td>34.72</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>270.56</td> <td>27.31</td> <td>46.00</td> <td>-18.69</td> <td>42.05</td> <td>18.21</td> <td>1.71</td> <td>34.66</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>5</td> <td>783.69</td> <td>30.09</td> <td>46.00</td> <td>-15.91</td> <td>33.66</td> <td>27.76</td> <td>3.00</td> <td>34.33</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>6</td> <td>915.61</td> <td>31.36</td> <td>46.00</td> <td>-14.64</td> <td>33.50</td> <td>28.98</td> <td>3.18</td> <td>34.30</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 33.88 | 21.98 | 40.00 | -18.02 | 37.82 | 18.46 | 0.57 | 34.87 | -- | -- | Peak | 2 | 112.45 | 22.80 | 43.50 | -20.70 | 40.54 | 15.92 | 1.12 | 34.78 | -- | -- | Peak | 3 | 141.55 | 25.03 | 43.50 | -18.47 | 40.23 | 18.27 | 1.25 | 34.72 | -- | -- | Peak | 4 | 270.56 | 27.31 | 46.00 | -18.69 | 42.05 | 18.21 | 1.71 | 34.66 | -- | -- | Peak | 5 | 783.69 | 30.09 | 46.00 | -15.91 | 33.66 | 27.76 | 3.00 | 34.33 | -- | -- | Peak | 6 | 915.61 | 31.36 | 46.00 | -14.64 | 33.50 | 28.98 | 3.18 | 34.30 | -- | -- |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 46.49 | 22.87 | 40.00 | -17.13 | 37.56 | 19.62 | 0.69 | 35.00 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 115.36 | 24.92 | 43.50 | -18.58 | 42.39 | 16.16 | 1.14 | 34.77 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 142.52 | 25.81 | 43.50 | -17.69 | 40.93 | 18.35 | 1.25 | 34.72 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 265.71 | 28.40 | 46.00 | -17.60 | 43.32 | 18.06 | 1.69 | 34.67 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | 349.13 | 30.91 | 46.00 | -15.09 | 43.37 | 20.20 | 1.94 | 34.60 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | 859.35 | 29.78 | 46.00 | -16.22 | 32.20 | 28.77 | 3.11 | 34.30 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 33.88 | 21.98 | 40.00 | -18.02 | 37.82 | 18.46 | 0.57 | 34.87 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 112.45 | 22.80 | 43.50 | -20.70 | 40.54 | 15.92 | 1.12 | 34.78 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 141.55 | 25.03 | 43.50 | -18.47 | 40.23 | 18.27 | 1.25 | 34.72 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 270.56 | 27.31 | 46.00 | -18.69 | 42.05 | 18.21 | 1.71 | 34.66 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | 783.69 | 30.09 | 46.00 | -15.91 | 33.66 | 27.76 | 3.00 | 34.33 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | 915.61 | 31.36 | 46.00 | -14.64 | 33.50 | 28.98 | 3.18 | 34.30 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 24 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------|--------|--------|--------|--------|--------|--------|------|---------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|---|---------|-------|-------|-------|-------|-------|------|-------|-----|-----|---------|--|-------|------|-----|-------|--------|------|------|--------|------|-------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|---|---------|-------|-------|-------|-------|-------|------|-------|-----|-----|---------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_802.11n_HT20_CH11_2462MHz+B13 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.51</td> <td>68.59</td> <td>74.00</td> <td>-5.41</td> <td>66.33</td> <td>30.85</td> <td>4.92</td> <td>33.51</td> <td>200</td> <td>152</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 2483.51 | 68.59 | 74.00 | -5.41 | 66.33 | 30.85 | 4.92 | 33.51 | 200 | 152 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>99.40</td> <td>-----</td> <td>-----</td> <td>97.28</td> <td>30.76</td> <td>4.89</td> <td>33.53</td> <td>200</td> <td>152</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 2462.00 | 99.40 | ----- | ----- | 97.28 | 30.76 | 4.89 | 33.53 | 200 | 152 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2483.51 | 68.59 | 74.00 | -5.41 | 66.33 | 30.85 | 4.92 | 33.51 | 200 | 152 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2462.00 | 99.40 | ----- | ----- | 97.28 | 30.76 | 4.89 | 33.53 | 200 | 152 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.55</td> <td>48.91</td> <td>54.00</td> <td>-5.09</td> <td>46.65</td> <td>30.85</td> <td>4.92</td> <td>33.51</td> <td>200</td> <td>152</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 2483.55 | 48.91 | 54.00 | -5.09 | 46.65 | 30.85 | 4.92 | 33.51 | 200 | 152 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>92.42</td> <td>-----</td> <td>-----</td> <td>90.28</td> <td>30.77</td> <td>4.89</td> <td>33.52</td> <td>200</td> <td>152</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 2462.00 | 92.42 | ----- | ----- | 90.28 | 30.77 | 4.89 | 33.52 | 200 | 152 | AVERAGE |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2483.55 | 48.91 | 54.00 | -5.09 | 46.65 | 30.85 | 4.92 | 33.51 | 200 | 152 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2462.00 | 92.42 | ----- | ----- | 90.28 | 30.77 | 4.89 | 33.52 | 200 | 152 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 24 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|-------------|-------|--------|-------------|--------|--------|--------|--------|------|---------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|-----|---------|---|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|-----|---|---------|-------|-------|-------|-------|-------|------|-------|-----|-----|---------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_802.11n_HT20_CH11_2462MHz+B13 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <p>Date: 2024-09-25</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.93</td> <td>63.94</td> <td>74.00</td> <td>-10.06</td> <td>61.68</td> <td>30.85</td> <td>4.92</td> <td>33.51</td> <td>180</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 2483.93 | 63.94 | 74.00 | -10.06 | 61.68 | 30.85 | 4.92 | 33.51 | 180 | 360 | PEAK | <p>Date: 2024-09-25</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>96.22</td> <td>-----</td> <td>-----</td> <td>94.08</td> <td>30.77</td> <td>4.89</td> <td>33.52</td> <td>180</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 2462.00 | 96.22 | ----- | ----- | 94.08 | 30.77 | 4.89 | 33.52 | 180 | 360 | PEAK |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2483.93 | 63.94 | 74.00 | -10.06 | 61.68 | 30.85 | 4.92 | 33.51 | 180 | 360 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2462.00 | 96.22 | ----- | ----- | 94.08 | 30.77 | 4.89 | 33.52 | 180 | 360 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <p>Date: 2024-09-25</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.51</td> <td>45.83</td> <td>54.00</td> <td>-8.17</td> <td>43.57</td> <td>30.85</td> <td>4.92</td> <td>33.51</td> <td>180</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 2483.51 | 45.83 | 54.00 | -8.17 | 43.57 | 30.85 | 4.92 | 33.51 | 180 | 360 | AVERAGE | <p>Date: 2024-09-25</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>89.39</td> <td>-----</td> <td>-----</td> <td>87.25</td> <td>30.77</td> <td>4.89</td> <td>33.52</td> <td>180</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 2462.00 | 89.39 | ----- | ----- | 87.25 | 30.77 | 4.89 | 33.52 | 180 | 360 | AVERAGE |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2483.51 | 45.83 | 54.00 | -8.17 | 43.57 | 30.85 | 4.92 | 33.51 | 180 | 360 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2462.00 | 89.39 | ----- | ----- | 87.25 | 30.77 | 4.89 | 33.52 | 180 | 360 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 24 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|-------------|--------------|-------------|--------|--------|--------|--------|--------|------|-------|-------------|--------------|-------------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|----|----|------|---|---------|-------|-------|--------|-------|-------|------|-------|----|----|------|--|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|--------------|-------------|--|--|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|----|----|------|---|---------|-------|-------|--------|-------|-------|------|-------|----|----|------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_802.11n_HT20_CH11_2462MHz+B13 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.00</td> <td>40.42</td> <td>74.00</td> <td>-33.58</td> <td>63.50</td> <td>34.40</td> <td>7.79</td> <td>65.27</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7386.00</td> <td>43.00</td> <td>74.00</td> <td>-31.00</td> <td>63.00</td> <td>35.42</td> <td>9.17</td> <td>64.59</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 4924.00 | 40.42 | 74.00 | -33.58 | 63.50 | 34.40 | 7.79 | 65.27 | -- | -- | Peak | 2 | 7386.00 | 43.00 | 74.00 | -31.00 | 63.00 | 35.42 | 9.17 | 64.59 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.00</td> <td>40.29</td> <td>74.00</td> <td>-33.71</td> <td>63.37</td> <td>34.40</td> <td>7.79</td> <td>65.27</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7386.00</td> <td>43.01</td> <td>74.00</td> <td>-30.99</td> <td>63.01</td> <td>35.42</td> <td>9.17</td> <td>64.59</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level Factor | Loss Factor | | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 4924.00 | 40.29 | 74.00 | -33.71 | 63.37 | 34.40 | 7.79 | 65.27 | -- | -- | Peak | 2 | 7386.00 | 43.01 | 74.00 | -30.99 | 63.01 | 35.42 | 9.17 | 64.59 | -- | -- | Peak |
| | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 4924.00 | 40.42 | 74.00 | -33.58 | 63.50 | 34.40 | 7.79 | 65.27 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 7386.00 | 43.00 | 74.00 | -31.00 | 63.00 | 35.42 | 9.17 | 64.59 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 4924.00 | 40.29 | 74.00 | -33.71 | 63.37 | 34.40 | 7.79 | 65.27 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 7386.00 | 43.01 | 74.00 | -30.99 | 63.01 | 35.42 | 9.17 | 64.59 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 25 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------|--------|--------|--------|--------|--------|--------|------|---------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|---|---------|-------|-------|-------|-------|-------|------|-------|-----|-----|---------|--|-------|------|-----|-------|--------|------|------|--------|------|-------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|---|---------|--------|-------|-------|-------|-------|------|-------|-----|-----|------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_802.11n_HT20_CH11_2462MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.62</td> <td>64.16</td> <td>74.00</td> <td>-9.84</td> <td>61.90</td> <td>30.85</td> <td>4.92</td> <td>33.51</td> <td>200</td> <td>150</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 2483.62 | 64.16 | 74.00 | -9.84 | 61.90 | 30.85 | 4.92 | 33.51 | 200 | 150 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2468.00</td> <td>101.23</td> <td>-----</td> <td>-----</td> <td>99.06</td> <td>30.79</td> <td>4.90</td> <td>33.52</td> <td>200</td> <td>150</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 2468.00 | 101.23 | ----- | ----- | 99.06 | 30.79 | 4.90 | 33.52 | 200 | 150 | Peak |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2483.62 | 64.16 | 74.00 | -9.84 | 61.90 | 30.85 | 4.92 | 33.51 | 200 | 150 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2468.00 | 101.23 | ----- | ----- | 99.06 | 30.79 | 4.90 | 33.52 | 200 | 150 | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.55</td> <td>47.83</td> <td>54.00</td> <td>-6.17</td> <td>45.57</td> <td>30.85</td> <td>4.92</td> <td>33.51</td> <td>200</td> <td>150</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 2483.55 | 47.83 | 54.00 | -6.17 | 45.57 | 30.85 | 4.92 | 33.51 | 200 | 150 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2464.00</td> <td>94.83</td> <td>-----</td> <td>-----</td> <td>92.69</td> <td>30.77</td> <td>4.89</td> <td>33.52</td> <td>200</td> <td>150</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 2464.00 | 94.83 | ----- | ----- | 92.69 | 30.77 | 4.89 | 33.52 | 200 | 150 | Peak |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2483.55 | 47.83 | 54.00 | -6.17 | 45.57 | 30.85 | 4.92 | 33.51 | 200 | 150 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2464.00 | 94.83 | ----- | ----- | 92.69 | 30.77 | 4.89 | 33.52 | 200 | 150 | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 25 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------------------------|--|-------------|-------|---------|--------|--------|--------|--------|--------|------------------------|--------------|-------------|--|--|--|--|--|----------------------|--------------|----|----|-----|--|--|--|------------------------------|------------------------|-----|-----|---------|--|--|--|---|-------|------|-----|-------|--------|------|------|--------|------------------------|--------------|-------------|--|--|--|--|--|----------------------|--------------|----|----|-----|--|--|--|-----------------|------------------------|-----|-----|------|--|--|--|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_802.11n HT20_CH11_2462MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2483.58 61.19 74.00 -12.81</td> <td>58.93 30.85 4.92 33.51</td> <td>100</td> <td>157</td> <td>PEAK</td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line Margin | Level Factor | Loss Factor | | | | | | MHz dBuV/m dBuV/m dB | dBuV dB/m dB | dB | cm | deg | | | | 1 2483.58 61.19 74.00 -12.81 | 58.93 30.85 4.92 33.51 | 100 | 157 | PEAK | | | | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2464.00 96.64</td> <td>94.50 30.77 4.89 33.52</td> <td>100</td> <td>157</td> <td>Peak</td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line Margin | Level Factor | Loss Factor | | | | | | MHz dBuV/m dBuV/m dB | dBuV dB/m dB | dB | cm | deg | | | | 1 2464.00 96.64 | 94.50 30.77 4.89 33.52 | 100 | 157 | Peak | | | |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line Margin | Level Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz dBuV/m dBuV/m dB | dBuV dB/m dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 2483.58 61.19 74.00 -12.81 | 58.93 30.85 4.92 33.51 | 100 | 157 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line Margin | Level Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz dBuV/m dBuV/m dB | dBuV dB/m dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 2464.00 96.64 | 94.50 30.77 4.89 33.52 | 100 | 157 | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2483.51 44.77 54.00 -9.23</td> <td>42.51 30.85 4.92 33.51</td> <td>100</td> <td>157</td> <td>AVERAGE</td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line Margin | Level Factor | Loss Factor | | | | | | MHz dBuV/m dBuV/m dB | dBuV dB/m dB | dB | cm | deg | | | | 1 2483.51 44.77 54.00 -9.23 | 42.51 30.85 4.92 33.51 | 100 | 157 | AVERAGE | | | | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2464.00 88.90</td> <td>86.76 30.77 4.89 33.52</td> <td>100</td> <td>157</td> <td>Peak</td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line Margin | Level Factor | Loss Factor | | | | | | MHz dBuV/m dBuV/m dB | dBuV dB/m dB | dB | cm | deg | | | | 1 2464.00 88.90 | 86.76 30.77 4.89 33.52 | 100 | 157 | Peak | | | |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line Margin | Level Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz dBuV/m dBuV/m dB | dBuV dB/m dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 2483.51 44.77 54.00 -9.23 | 42.51 30.85 4.92 33.51 | 100 | 157 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line Margin | Level Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz dBuV/m dBuV/m dB | dBuV dB/m dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 2464.00 88.90 | 86.76 30.77 4.89 33.52 | 100 | 157 | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 25 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|---|-------------|--------|--------|-------------|--------|--------|--------|------------|--|------|-------|-------------|-------|--------|-------------|--|--|--------|--|-----|--------|--------|----|------|------|----|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|------------|---|---------|-------|-------|--------|-------|-------|------|-------|------------|---|--|-------|------|-----|-------|--------|------|------|--|------|-------|-------------|-------|--------|-------------|--|--|--------|--|-----|--------|--------|----|------|------|----|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|------------|---|---------|-------|-------|--------|-------|-------|------|-------|------------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_802.11n HT20_CH11_2462MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.00</td> <td>40.72</td> <td>74.00</td> <td>-33.28</td> <td>63.80</td> <td>34.40</td> <td>7.79</td> <td>65.27</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>7386.00</td> <td>43.59</td> <td>74.00</td> <td>-30.41</td> <td>63.59</td> <td>35.42</td> <td>9.17</td> <td>64.59</td> <td>-- -- Peak</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 4924.00 | 40.72 | 74.00 | -33.28 | 63.80 | 34.40 | 7.79 | 65.27 | -- -- Peak | 2 | 7386.00 | 43.59 | 74.00 | -30.41 | 63.59 | 35.42 | 9.17 | 64.59 | -- -- Peak | <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.00</td> <td>40.69</td> <td>74.00</td> <td>-33.31</td> <td>63.77</td> <td>34.40</td> <td>7.79</td> <td>65.27</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>7386.00</td> <td>42.97</td> <td>74.00</td> <td>-31.03</td> <td>62.97</td> <td>35.42</td> <td>9.17</td> <td>64.59</td> <td>-- -- Peak</td> </tr> </tbody> </table> | | Limit | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 4924.00 | 40.69 | 74.00 | -33.31 | 63.77 | 34.40 | 7.79 | 65.27 | -- -- Peak | 2 | 7386.00 | 42.97 | 74.00 | -31.03 | 62.97 | 35.42 | 9.17 | 64.59 | -- -- Peak |
| | | Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 4924.00 | 40.72 | 74.00 | -33.28 | 63.80 | 34.40 | 7.79 | 65.27 | -- -- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 7386.00 | 43.59 | 74.00 | -30.41 | 63.59 | 35.42 | 9.17 | 64.59 | -- -- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 4924.00 | 40.69 | 74.00 | -33.31 | 63.77 | 34.40 | 7.79 | 65.27 | -- -- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 7386.00 | 42.97 | 74.00 | -31.03 | 62.97 | 35.42 | 9.17 | 64.59 | -- -- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 26 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--|-------------|--------|--------|--------|--------|--------|--------|--------|------|---------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|---|---------|-------|-------|-------|-------|-------|-------|-------|-----|------|---|--|-------|------|-------|--------|--------|------|--------|--------|-------|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|------|------|------|----|----|---------|---------|-------|-------|-------|-------|-------|-------|-----|------|------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_802.11n HT20_CH11_2462MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.34</td> <td>74.00</td> <td>-7.00</td> <td>64.74</td> <td>30.85</td> <td>4.92</td> <td>33.51</td> <td>200</td> <td>155</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 2484.34 | 74.00 | -7.00 | 64.74 | 30.85 | 4.92 | 33.51 | 200 | 155 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>102.08</td> <td>-----</td> <td>99.95</td> <td>30.77</td> <td>4.89</td> <td>33.53</td> <td>200</td> <td>155</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 2462.00 | 102.08 | ----- | 99.95 | 30.77 | 4.89 | 33.53 | 200 | 155 | Peak | |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2484.34 | 74.00 | -7.00 | 64.74 | 30.85 | 4.92 | 33.51 | 200 | 155 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2462.00 | 102.08 | ----- | 99.95 | 30.77 | 4.89 | 33.53 | 200 | 155 | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.51</td> <td>50.43</td> <td>54.00</td> <td>-3.57</td> <td>48.17</td> <td>30.85</td> <td>4.92</td> <td>33.51</td> <td>200</td> <td>155</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 2483.51 | 50.43 | 54.00 | -3.57 | 48.17 | 30.85 | 4.92 | 33.51 | 200 | 155 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2464.00</td> <td>94.81</td> <td>-----</td> <td>92.67</td> <td>30.77</td> <td>4.89</td> <td>33.52</td> <td>200</td> <td>155</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 2464.00 | 94.81 | ----- | 92.67 | 30.77 | 4.89 | 33.52 | 200 | 155 | Peak |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2483.51 | 50.43 | 54.00 | -3.57 | 48.17 | 30.85 | 4.92 | 33.51 | 200 | 155 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2464.00 | 94.81 | ----- | 92.67 | 30.77 | 4.89 | 33.52 | 200 | 155 | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 26 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---|-------------|--------|--------|--------|--------|--------|-------|------|-------|---------|--------|-------|--------|------|--------|----|----|-----|--------|---|---------|-------|-------|-------|-------|-------|------|-------|-----|-----|---------|--|-------|------|-----|-------|--------|------|------|------|-------|------|--------|-------|--------|------|--------|----|----|-----|--------|---|---------|-------|-------|-------|-------|-------|------|-------|-----|-----|------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_802.11n HT20_CH11_2462MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.93</td> <td>66.21</td> <td>74.00</td> <td>-7.79</td> <td>63.95</td> <td>30.85</td> <td>4.92</td> <td>33.51</td> <td>162</td> <td>180</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | dB | cm | deg | Remark | 1 | 2483.93 | 66.21 | 74.00 | -7.79 | 63.95 | 30.85 | 4.92 | 33.51 | 162 | 180 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>99.64</td> <td>74.00</td> <td>-7.79</td> <td>63.95</td> <td>30.85</td> <td>4.92</td> <td>33.51</td> <td>162</td> <td>180</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | dB | cm | deg | Remark | 1 | 2462.00 | 99.64 | 74.00 | -7.79 | 63.95 | 30.85 | 4.92 | 33.51 | 162 | 180 | Peak |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | dB | cm | deg | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2483.93 | 66.21 | 74.00 | -7.79 | 63.95 | 30.85 | 4.92 | 33.51 | 162 | 180 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | dB | cm | deg | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2462.00 | 99.64 | 74.00 | -7.79 | 63.95 | 30.85 | 4.92 | 33.51 | 162 | 180 | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.58</td> <td>49.26</td> <td>54.00</td> <td>-4.74</td> <td>47.00</td> <td>30.85</td> <td>4.92</td> <td>33.51</td> <td>162</td> <td>180</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | dB | cm | deg | Remark | 1 | 2483.58 | 49.26 | 54.00 | -4.74 | 47.00 | 30.85 | 4.92 | 33.51 | 162 | 180 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2464.00</td> <td>92.26</td> <td>74.00</td> <td>-7.79</td> <td>63.95</td> <td>30.85</td> <td>4.92</td> <td>33.51</td> <td>162</td> <td>180</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | dB | cm | deg | Remark | 1 | 2464.00 | 92.26 | 74.00 | -7.79 | 63.95 | 30.85 | 4.92 | 33.51 | 162 | 180 | Peak |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | dB | cm | deg | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2483.58 | 49.26 | 54.00 | -4.74 | 47.00 | 30.85 | 4.92 | 33.51 | 162 | 180 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | dB | cm | deg | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2464.00 | 92.26 | 74.00 | -7.79 | 63.95 | 30.85 | 4.92 | 33.51 | 162 | 180 | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |




| Mode | 26 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|-------------|-------|--------|-------------|--------|--------|--------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|---------|-------|-------|--------|-------|-------|------|-------|----|----|------|---|---------|-------|-------|--------|-------|-------|------|-------|----|----|------|--|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|---------|-------|-------|--------|-------|-------|------|-------|----|----|------|---|---------|-------|-------|--------|-------|-------|------|-------|----|----|------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_802.11n HT20_CH11_2462MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.00</td> <td>40.10</td> <td>74.00</td> <td>-33.90</td> <td>63.18</td> <td>34.40</td> <td>7.79</td> <td>65.27</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7386.00</td> <td>42.96</td> <td>74.00</td> <td>-31.04</td> <td>62.96</td> <td>35.42</td> <td>9.17</td> <td>64.59</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 4924.00 | 40.10 | 74.00 | -33.90 | 63.18 | 34.40 | 7.79 | 65.27 | -- | -- | Peak | 2 | 7386.00 | 42.96 | 74.00 | -31.04 | 62.96 | 35.42 | 9.17 | 64.59 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.00</td> <td>40.51</td> <td>74.00</td> <td>-33.49</td> <td>63.59</td> <td>34.40</td> <td>7.79</td> <td>65.27</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7386.00</td> <td>42.79</td> <td>74.00</td> <td>-31.21</td> <td>62.79</td> <td>35.42</td> <td>9.17</td> <td>64.59</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 4924.00 | 40.51 | 74.00 | -33.49 | 63.59 | 34.40 | 7.79 | 65.27 | -- | -- | Peak | 2 | 7386.00 | 42.79 | 74.00 | -31.21 | 62.79 | 35.42 | 9.17 | 64.59 | -- | -- | Peak |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 4924.00 | 40.10 | 74.00 | -33.90 | 63.18 | 34.40 | 7.79 | 65.27 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 7386.00 | 42.96 | 74.00 | -31.04 | 62.96 | 35.42 | 9.17 | 64.59 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 4924.00 | 40.51 | 74.00 | -33.49 | 63.59 | 34.40 | 7.79 | 65.27 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 7386.00 | 42.79 | 74.00 | -31.21 | 62.79 | 35.42 | 9.17 | 64.59 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



Appendix D. Duty Cycle Plots


| Band | Duty Cycle(%) | T(ms) | 1/T(kHz) | VBW Setting |
|--------------|---------------|-------|----------|-------------|
| 802.11b | 100 | - | - | 10Hz |
| 802.11g | 100 | - | - | 10Hz |
| 802.11n HT20 | 100 | - | - | 10Hz |
| 802.11n HT40 | 100 | - | - | 10Hz |

802.11b

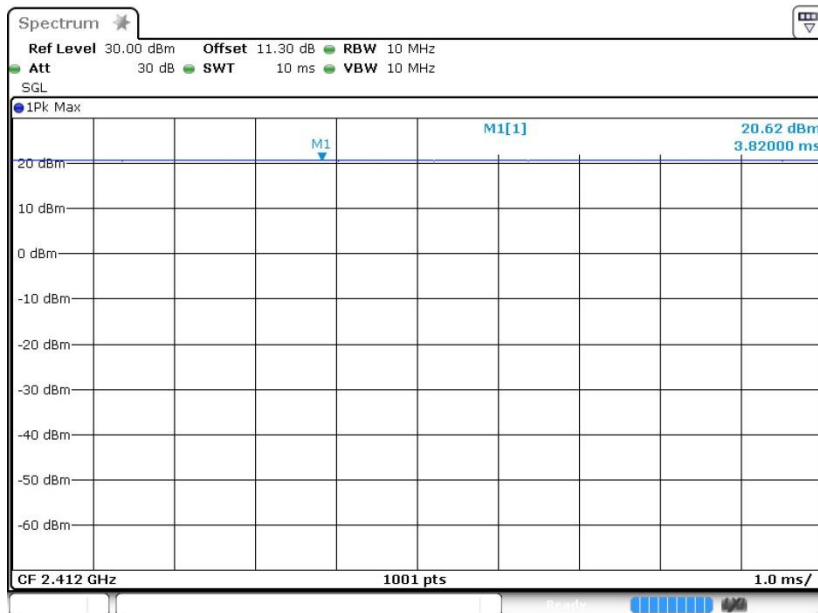




802.11g

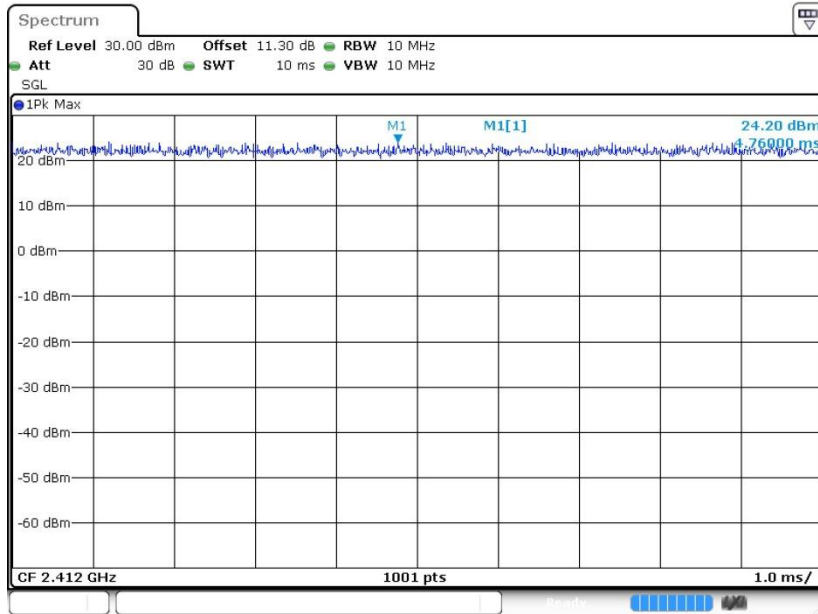

802.11n HT20

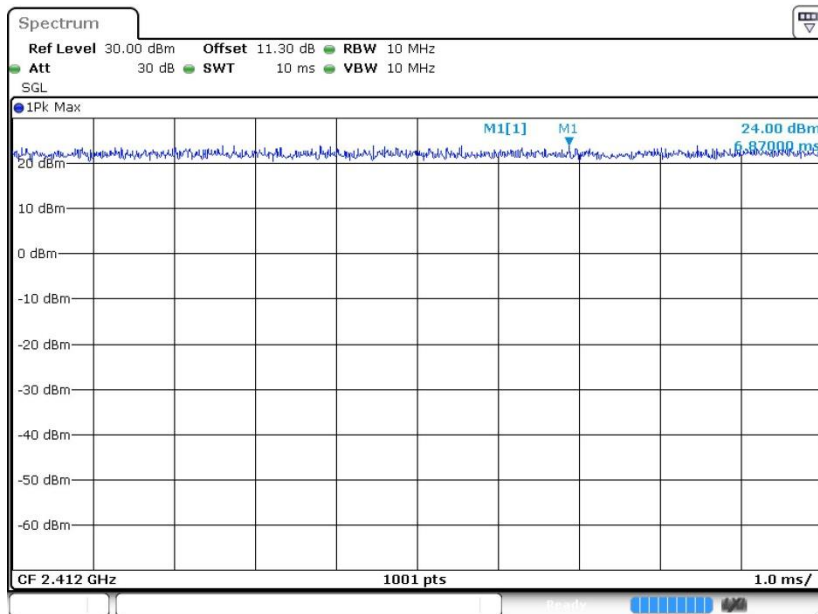



802.11n HT40

