



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2503-1, XT2505-3
FCC ID : IHDT56AU7
STANDARD : 47 CFR Part 27 Subpart O (3700-3980MHz)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S) : Dec. 24, 2024 ~ Dec 31, 2024

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	5
1.5 Modification of EUT	6
1.6 Maximum EIRP and Emission Designator	6
1.7 Testing Location	8
1.8 Test Software	8
1.9 Applicable Standards	8
1.10 Specification of Accessory	9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	10
2.1 Test Mode	10
2.2 Connection Diagram of Test System	11
2.3 Support Unit used in test configuration and system	11
2.4 Measurement Results Explanation Example	11
2.5 Frequency List of Low/Middle/High Channels	12
3 CONDUCTED TEST ITEMS	14
3.1 Measuring Instruments	14
3.2 Test Setup	14
3.3 Test Result of Conducted Test	14
3.4 Conducted Output Power and EIRP	15
3.5 Peak-to-Average Ratio	16
3.6 Occupied Bandwidth	17
3.7 Conducted Band Edge	18
3.8 Conducted Spurious Emission	19
3.9 Frequency Stability	20
4 RADIATED TEST ITEMS	21
4.1 Measuring Instruments	21
4.2 Test Setup	21
4.3 Test Result of Radiated Test	22
4.4 Radiated Spurious Emission	23
5 LIST OF MEASURING EQUIPMENT	24
6 MEASUREMENT UNCERTAINTY	25
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG4D1311J	Rev. 01	Initial issue of report	Jan. 24, 2025



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§27.50(j)(3)	Equivalent Isotropic Radiated Power (5G NR n77, n78)	EIRP < 1Watt		
3.5	§27.50(j)(4)	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §27.53(l)(2)	Conducted Band Edge Measurement (5G NR n77, n78)	< 43+10log ₁₀ (P[Watts])	PASS	-
3.8	§2.1051 §27.53(l)(2)	Conducted Spurious Emission (5G NR n77, n78)	< 43+10log ₁₀ (P[Watts])	PASS	-
3.9	§27.54	Frequency Stability Temperature & Voltage	Within Authorized Band	PASS	-
4.4	§2.1053 §27.53(l)(2)	Radiated Spurious Emission (5G NR n77, n78)	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 30.70 dB at 10122.36 MHz

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2503-1, XT2505-3
FCC ID	IHDT56AU7
IMEI Code	Conducted : 354424860019490 Radiation : 354424860020035/354424860020043
HW Version	DVT2
SW Version	V2VC35.13
EUT Stage	Identical Prototype

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency	5G NR n77: 3700 MHz ~ 3980 MHz 5G NR n78: 3700 MHz ~ 3800 MHz
SCS	30kHz
Bandwidth	n77/n78: 10 / 15 / 20 / 25 / 30 / 40 / 50 / 60 / 70 / 80 / 90 / 100MHz
Antenna Gain	<Ant. 4> 5G NR n77: -4.1 dBi 5G NR n78: -4.5 dBi <Ant. 5> 5G NR n77: -5.5 dBi 5G NR n78: -5.6 dBi <Ant. 7> 5G NR n77: -3.3 dBi 5G NR n78: -3.6 dBi <Ant. 8> 5G NR n77: -6.2 dBi 5G NR n78: -6.8 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

Remark:

1. The maximum EIRP is calculated from max output power and max antenna gain, only the maximum EIRP is shown in the report, 5G NR n77/n78 for Antenna 7.
2. The device supports n77(1T4R) SRS resources on Antenna 4/5/7/8, only the test data of worst Antenna 7 is showed in the report according to the maximum power.
3. 5G NR n78 support SA and NSA mode. The whole testing has assessed SA mode for n78 by referring to the higher conducted power for conducted test items.
4. All the supported EN-DC combinations are verified conducted power, only the EN-DC combination with highest power are shown in the report.
5. The EN-DC mode combination could be referred to the product spec.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum EIRP and Emission Designator

5G NR n77 SA		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	3705.00 ~ 3975.00	0.1148	8M58G7D	0.1033	8M58W7D
15	3705.52 ~ 3972.48	0.1132	13M6G7D	0.1019	13M6W7D
20	3710.01 ~ 3969.99	0.1138	18M2G7D	0.1054	18M3W7D
25	3712.50 ~ 3967.50	0.1143	23M2G7D	0.1023	23M3W7D
30	3715.02 ~ 3964.98	0.1143	27M7G7D	0.1033	27M9W7D
40	3720.00 ~ 3960.00	0.1127	37M7G7D	0.1047	37M8W7D
50	3725.01 ~ 3954.99	0.1143	47M4G7D	0.0986	47M5W7D
60	3730.02 ~ 3949.98	0.1130	57M6G7D	0.0995	57M7W7D
70	3735.00 ~ 3945.00	0.1127	67M3G7D	0.1007	67M6W7D
80	3740.01 ~ 3939.99	0.1143	77M5G7D	0.1002	77M5W7D
90	3745.02 ~ 3934.98	0.1143	87M2G7D	0.0959	87M7W7D
100	3750.00 ~ 3930.00	0.1159	97M5G7D	0.1054	97M7W7D



5G NR n78 SA		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	3705.00 ~ 3795.00	0.0995	8M58G7D	0.0804	8M58W7D
15	3707.52 ~ 3792.48	0.0995	13M6G7D	0.0785	13M6W7D
20	3710.01 ~ 3789.99	0.1000	18M2G7D	0.0796	18M3W7D
25	3712.50 ~ 3787.50	0.1012	23M2G7D	0.0796	23M3W7D
30	3715.02 ~ 3784.98	0.1050	27M7G7D	0.0841	27M9W7D
40	3720.00 ~ 3780.00	0.1062	37M7G7D	0.0847	37M8W7D
50	3725.01 ~ 3774.99	0.1047	47M4G7D	0.0841	47M5W7D
60	3730.02 ~ 3769.98	0.1009	57M6G7D	0.0815	57M7W7D
70	3735.00 ~ 3765.00	0.1064	67M3G7D	0.0863	67M6W7D
80	3740.01 ~ 3759.99	0.1021	77M5G7D	0.0830	77M5W7D
90	3745.02 ~ 3754.98	0.0975	87M2G7D	0.0782	87M7W7D
100	3750.00 ~ 3750.00	0.1074	97M5G7D	0.0889	97M7W7D

Note:

1. 5G NR Band n77 overlaps the entire frequency range of Band n78, and n77 power > n78 power, therefore the conducted test results of n77 provided in this report cover n78.
2. All modulations have been tested, and only the worst test results of PSK & QAM are shown in the report.

1.7 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH01-SZ	CN1256	421272

1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 27
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

All test items were verified and recorded according to the standards and without any deviation during the test.



1.10 Specification of Accessory

Accessories Information				
AC Adapter 1(US)	Brand Name	Motorola(Chenyang)	Model Name	MC-681N
AC Adapter 1(EU)	Brand Name	Motorola(Chenyang)	Model Name	MC-682N
AC Adapter 1(UK)	Brand Name	Motorola(Chenyang)	Model Name	MC-683N
AC Adapter 1(AU)	Brand Name	Motorola(Chenyang)	Model Name	MC-685N
AC Adapter 1(AR)	Brand Name	Motorola(Chenyang)	Model Name	MC-686N
AC Adapter 1(BR)	Brand Name	Motorola(Chenyang)	Model Name	MC-687N
AC Adapter 1(CHILE)	Brand Name	Motorola(Chenyang)	Model Name	MC-689N
AC Adapter 2(US)	Brand Name	Motorola(Chenyang)	Model Name	MC-681N
AC Adapter 2(EU)	Brand Name	Motorola(Acbel)	Model Name	MC-682N
AC Adapter 2(UK)	Brand Name	Motorola(Acbel)	Model Name	MC-683N
AC Adapter 2(AU)	Brand Name	Motorola(Acbel)	Model Name	MC-685N
AC Adapter 2(AR)	Brand Name	Motorola(Acbel)	Model Name	MC-686N
AC Adapter 2(BR)	Brand Name	Motorola(Acbel)	Model Name	MC-687N
AC Adapter 2(CHILE)	Brand Name	Motorola(Acbel)	Model Name	MC-689N
Battery 1	Brand Name	Motorola(ATL)	Model Name	RM52
Battery 2	Brand Name	Motorola(Cosmx)	Model Name	RM52
USB Cable 1	Brand Name	Motorola(saibao)	Model Name	SC18D71644
USB Cable 2	Brand Name	Motorola(Luxshare)	Model Name	SC18E08104
USB Cable 3	Brand Name	Motorola(saibao)	Model Name	SC18D86731
USB Cable 4	Brand Name	Motorola(Luxshare)	Model Name	SC18E08103
Wireless Earphones	Brand Name	Motorola	Model Name	XT2443-1

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.


For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.

Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			

Test Items	5G NR	Bandwidth (MHz)										Modulation					RB #			Test Channel		
		10	15	20	25	30	40	50	60	70~90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256 QAM	1	Partial	Full	L	M	H
Max. Output Power	n77	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	n78	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	n77			v								v	v						v		v	
26dB and 99% Bandwidth	n77	v	v	v	v	v	v	v	v	v	v		v	v	v	v			v		v	
Conducted Band Edge	n77	v						v			v	v	v				v		v	v		v
Conducted Spurious Emission	n77	v						v			v	v	v				v			v	v	v
Frequency Stability	n77			v									v						v		v	
E.I.R.P	n77	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	n78	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Radiated Spurious Emission	n77	Worst Case																			v	
	n78	Worst Case																			v	
Note	1. The mark “v ” means that this configuration is chosen for testing 2. The mark “-” means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. Frequency Stability : Normal Voltage = 3.91V; Low Voltage =3.60V; High Voltage =4.50V.																					

2.2 Connection Diagram of Test System

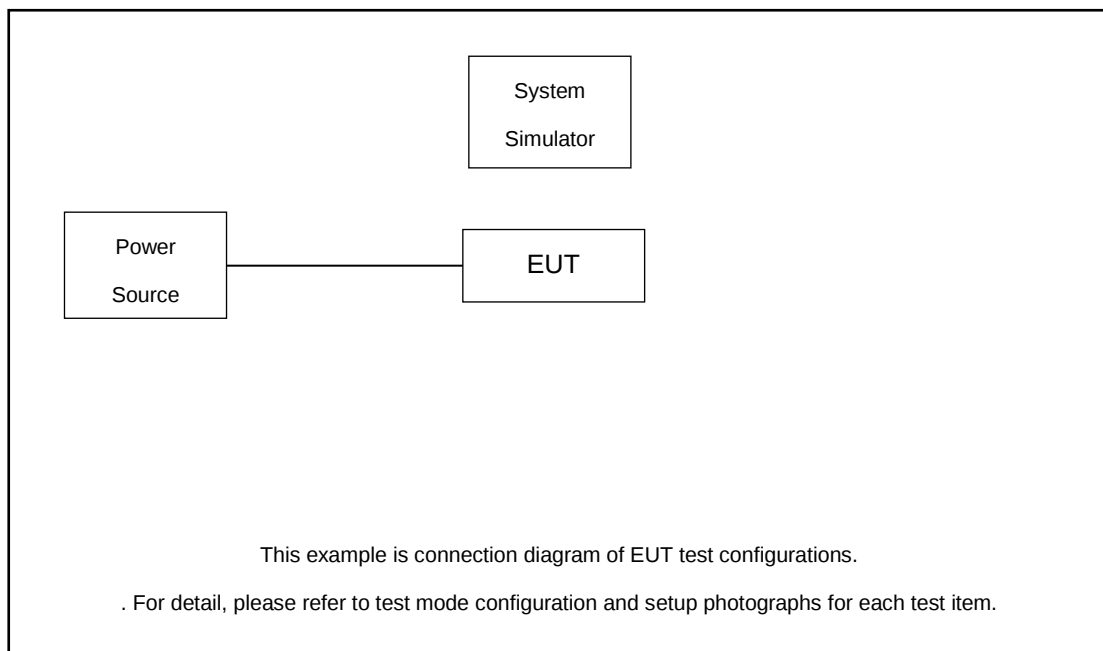

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 8.9 dB.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 8.9 \text{ (dB)} \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

5G n77 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	650000	656000	662000
	Frequency	3750	3840	3930
90	Channel	649668	656000	662332
	Frequency	3745.02	3840	3934.98
80	Channel	649334	656000	662666
	Frequency	3740.01	3840	3939.99
70	Channel	649000	656000	663000
	Frequency	3735	3840	3945
60	Channel	648668	656000	663332
	Frequency	3730.02	3840	3949.98
50	Channel	648334	656000	663666
	Frequency	3725.01	3840	3954.99
40	Channel	648000	656000	664000
	Frequency	3720	3840	3960
30	Channel	647668	656000	664332
	Frequency	3715.02	3840	3964.98
25	Channel	647500	656000	664500
	Frequency	3712.5	3840	3967.5
20	Channel	647334	656000	664666
	Frequency	3710.01	3840	3969.99
15	Channel	647168	656000	664832
	Frequency	3707.52	3840	3972.48
10	Channel	647000	656000	665000
	Frequency	3705	3840	3975



5G n78 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	650000		
	Frequency	3750		
90	Channel	649668	650000	650332
	Frequency	3745.02	3750	3754.98
80	Channel	649334	650000	650666
	Frequency	3740.01	3750	3759.99
70	Channel	649000	650000	651000
	Frequency	3735	3750	3765
60	Channel	648668	650000	651332
	Frequency	3730.02	3750	3769.98
50	Channel	648334	650000	651666
	Frequency	3725.01	3750	3774.99
40	Channel	648000	650000	652000
	Frequency	3720	3750	3780
30	Channel	647668	650000	652332
	Frequency	3715.02	3750	3784.98
25	Channel	647500	650000	652500
	Frequency	3712.5	3750	3787.5
20	Channel	647334	650000	652666
	Frequency	3710.01	3750	3789.99
15	Channel	647168	650000	652832
	Frequency	3707.52	3750	3792.48
10	Channel	647000	650000	653000
	Frequency	3705	3750	3795


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

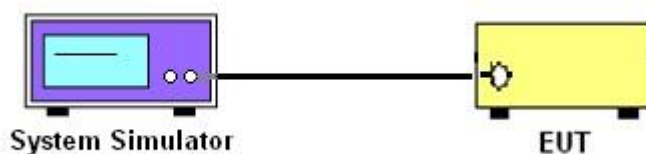

3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

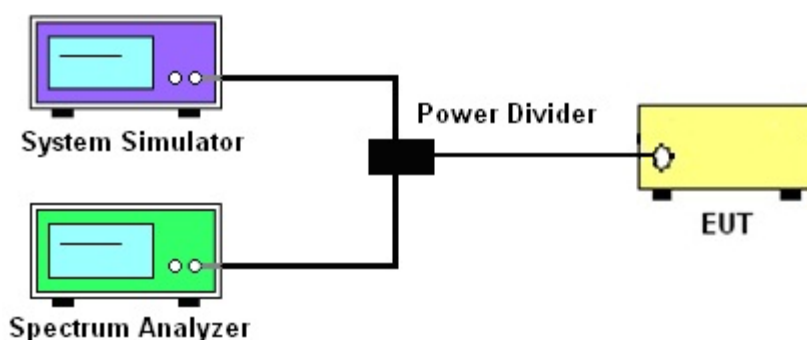

3.2.3 Frequency Stability

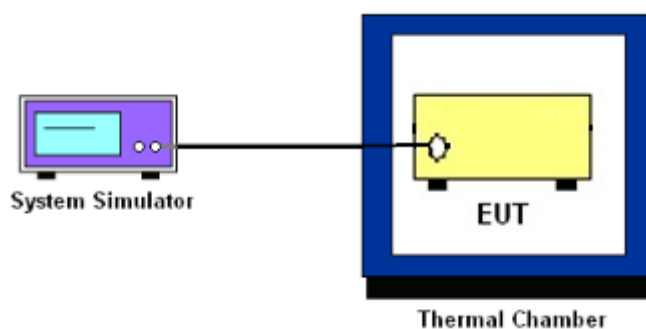

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power and EIRP

3.4.1 Description of the Conducted Output Power Measurement and EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The EIRP of mobile transmitters must not exceed 1 Watts for 5G NR n77, n78.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

27.53(l)(2)

For mobile operations in the 3700-3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz. Compliance with this paragraph is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be either one percent of the emission bandwidth of the fundamental emission of the transmitter or 350 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq$ 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used or a narrower RBW was used (generally limited to no less than 1% of the OBW) and the measured power was integrated over the full required measurement bandwidth.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} = -13\text{dBm}.$$

9. When using the integration method, the starting frequency of the integration shall be centered at one-half of the RBW away from the band edge.

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13\text{dBm}$.

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

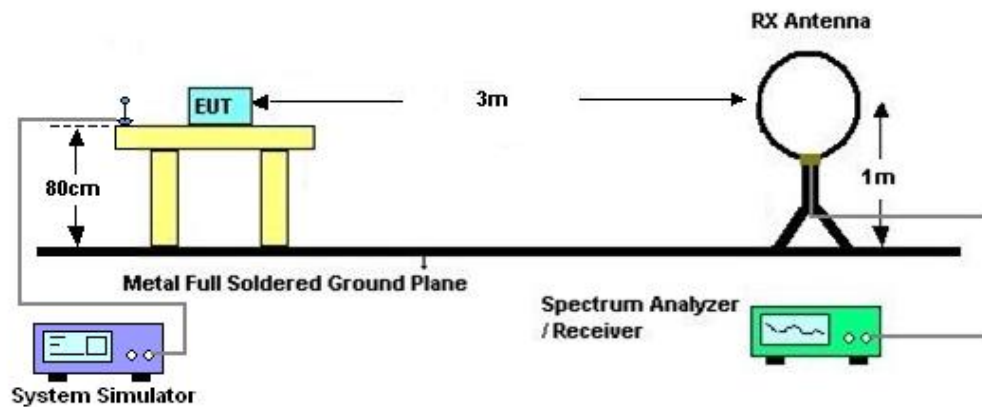

4.2.2 For radiated test from 30MHz to 1GHz

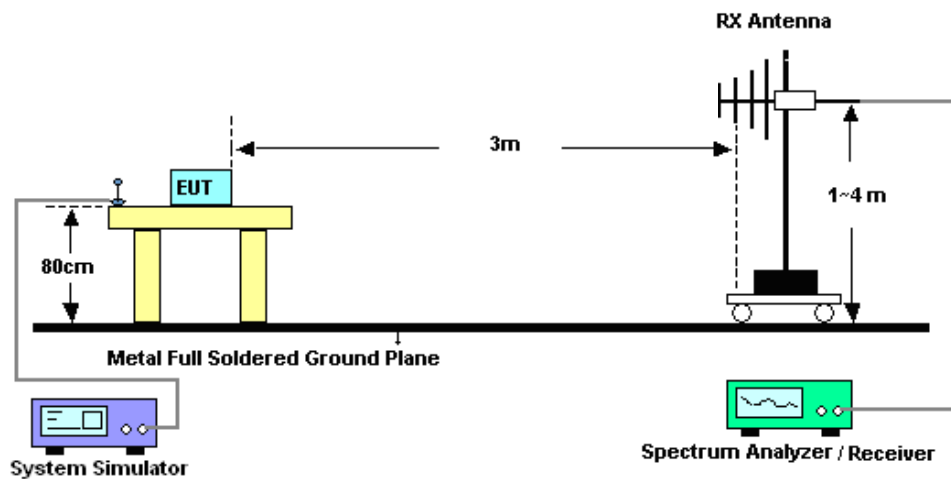

4.2.3 For radiated test above 1GHz

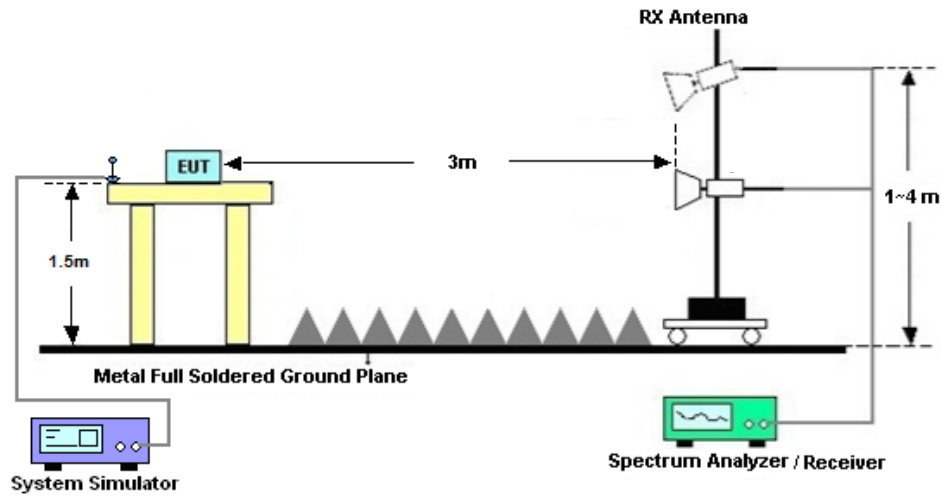

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [43 + 10\log(P)] \text{ (dB)}$
= $[30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
= -13dBm.



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 09, 2024	Dec. 24, 2024~ Dec. 31, 2024	Apr. 08, 2025	Conducted (TH01-SZ)
DC Power Supply	TTI	PL330P	290070	Max 32V, 3A	Oct. 15, 2024	Dec. 24, 2024~ Dec. 31, 2024	Oct. 14, 2025	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-04 265	60.06.020.007 7	0.4GHz~26.5GHz	Dec. 24, 2024	Dec. 24, 2024~ Dec. 31, 2024	Dec. 23, 2025	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhonggroup	LP-150U	H2014081803	-40~+150°C	Jul. 03, 2024	Dec. 24, 2024~ Dec. 31, 2024	Jul. 02, 2025	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec. 26, 2024	Dec. 27, 2024	Dec. 25, 2025	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 29, 2023	Dec. 27, 2024	Dec. 28, 2024	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5GHz	Oct. 14, 2024	Dec. 27, 2024	Oct. 13, 2025	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Oct. 24, 2023	Dec. 27, 2024	Oct. 23, 2025	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 04, 2024	Dec. 27, 2024	Jul. 03, 2025	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 09, 2024	Dec. 27, 2024	Apr. 08, 2025	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 09, 2024	Dec. 27, 2024	Apr. 08, 2025	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P-R	1943528	1GHz~18GHz	Oct. 14, 2024	Dec. 27, 2024	Oct. 13, 2025	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35 -HG	1871923	18GHz~40GHz	Jul. 03, 2024	Dec. 27, 2024	Jul. 02, 2025	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	Oct. 14, 2024	Dec. 27, 2024	Oct. 13, 2025	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Dec. 27, 2024	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Dec. 27, 2024	NCR	Radiation (03CH01-SZ)

NCR: No Calibration Required

6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
Peak to Average Ratio	±1.34 dB
Frequency Stability	±1.3 Hz

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.48 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.53 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.02 dB
---	---------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Khan Zhen	Temperature :	22~23℃
		Relative Humidity :	40~42%



Software Version: 23.06.1602

FR1 N77

Transmitter Conducted Output Power And EIRP, (G_T - L_c)=-3.3dB

NR Band	SCS	BandWidth	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
77	30	10	647000	3705	DFT-s-OFDM QPSK	12@6	22.91	19.61	0.0914
77	30	10	647000	3705	DFT-s-OFDM QPSK	1@1	22.8	19.5	0.0891
77	30	10	647000	3705	DFT-s-OFDM QPSK	1@22	23.09	19.79	0.0953
77	30	10	647000	3705	DFT-s-OFDM 16 QAM	12@6	21.97	18.67	0.0736
77	30	10	647000	3705	DFT-s-OFDM 16 QAM	1@1	21.9	18.6	0.0724
77	30	10	647000	3705	DFT-s-OFDM 16 QAM	1@22	22.13	18.83	0.0764
77	30	10	656000	3840	DFT-s-OFDM QPSK	12@6	23.37	20.07	0.1016
77	30	10	656000	3840	DFT-s-OFDM QPSK	1@1	23.54	20.24	0.1057
77	30	10	656000	3840	DFT-s-OFDM QPSK	1@22	23.23	19.93	0.0984
77	30	10	656000	3840	DFT-s-OFDM 16 QAM	12@6	22.54	19.24	0.0839
77	30	10	656000	3840	DFT-s-OFDM 16 QAM	1@1	22.6	19.3	0.0851
77	30	10	656000	3840	DFT-s-OFDM 16 QAM	1@22	22.34	19.04	0.0802
77	30	10	665000	3975	DFT-s-OFDM QPSK	12@6	23.9	20.6	0.1148
77	30	10	665000	3975	DFT-s-OFDM QPSK	1@1	23.89	20.59	0.1146
77	30	10	665000	3975	DFT-s-OFDM QPSK	1@22	23.84	20.54	0.1132
77	30	10	665000	3975	DFT-s-OFDM 16 QAM	12@6	23.28	19.98	0.0995
77	30	10	665000	3975	DFT-s-OFDM 16 QAM	1@1	23.44	20.14	0.1033
77	30	10	665000	3975	DFT-s-OFDM 16 QAM	1@22	23.26	19.96	0.0991
77	30	15	647168	3707.52	DFT-s-OFDM QPSK	18@9	23.03	19.73	0.0940
77	30	15	647168	3707.52	DFT-s-OFDM QPSK	1@1	22.81	19.51	0.0893
77	30	15	647168	3707.52	DFT-s-OFDM QPSK	1@36	23.33	20.03	0.1007
77	30	15	647168	3707.52	DFT-s-OFDM 16 QAM	18@9	22.04	18.74	0.0748
77	30	15	647168	3707.52	DFT-s-OFDM 16 QAM	1@1	21.81	18.51	0.0710
77	30	15	647168	3707.52	DFT-s-OFDM 16 QAM	1@36	22.36	19.06	0.0805
77	30	15	656000	3840	DFT-s-OFDM QPSK	18@9	23.48	20.18	0.1042
77	30	15	656000	3840	DFT-s-OFDM QPSK	1@1	23.56	20.26	0.1062
77	30	15	656000	3840	DFT-s-OFDM QPSK	1@36	23.09	19.79	0.0953
77	30	15	656000	3840	DFT-s-OFDM 16 QAM	18@9	22.5	19.2	0.0832
77	30	15	656000	3840	DFT-s-OFDM 16 QAM	1@1	22.55	19.25	0.0841
77	30	15	656000	3840	DFT-s-OFDM 16 QAM	1@36	22.11	18.81	0.0760
77	30	15	664832	3972.48	DFT-s-OFDM QPSK	18@9	23.84	20.54	0.1132
77	30	15	664832	3972.48	DFT-s-OFDM QPSK	1@1	23.77	20.47	0.1114
77	30	15	664832	3972.48	DFT-s-OFDM QPSK	1@36	23.82	20.52	0.1127



NR Band	SCS	BandWidth	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
77	30	15	664832	3972.48	DFT-s-OFDM 16 QAM	18@9	23.38	20.08	0.1019
77	30	15	664832	3972.48	DFT-s-OFDM 16 QAM	1@1	23.38	20.08	0.1019
77	30	15	664832	3972.48	DFT-s-OFDM 16 QAM	1@36	23.26	19.96	0.0991
77	30	20	647334	3710.01	DFT-s-OFDM QPSK	25@12	23.15	19.85	0.0966
77	30	20	647334	3710.01	DFT-s-OFDM QPSK	1@1	22.77	19.47	0.0885
77	30	20	647334	3710.01	DFT-s-OFDM QPSK	1@49	23.55	20.25	0.1059
77	30	20	647334	3710.01	DFT-s-OFDM 16 QAM	25@12	22.2	18.9	0.0776
77	30	20	647334	3710.01	DFT-s-OFDM 16 QAM	1@1	21.82	18.52	0.0711
77	30	20	647334	3710.01	DFT-s-OFDM 16 QAM	1@49	22.64	19.34	0.0859
77	30	20	656000	3840	DFT-s-OFDM QPSK	25@12	23.5	20.2	0.1047
77	30	20	656000	3840	DFT-s-OFDM QPSK	1@1	23.6	20.3	0.1072
77	30	20	656000	3840	DFT-s-OFDM QPSK	1@49	23.03	19.73	0.0940
77	30	20	656000	3840	DFT-s-OFDM 16 QAM	25@12	22.52	19.22	0.0836
77	30	20	656000	3840	DFT-s-OFDM 16 QAM	1@1	22.59	19.29	0.0849
77	30	20	656000	3840	DFT-s-OFDM 16 QAM	1@49	22	18.7	0.0741
77	30	20	664666	3969.99	DFT-s-OFDM QPSK	25@12	23.81	20.51	0.1125
77	30	20	664666	3969.99	DFT-s-OFDM QPSK	1@1	23.86	20.56	0.1138
77	30	20	664666	3969.99	DFT-s-OFDM QPSK	1@49	23.78	20.48	0.1117
77	30	20	664666	3969.99	DFT-s-OFDM 16 QAM	25@12	23.49	20.19	0.1045
77	30	20	664666	3969.99	DFT-s-OFDM 16 QAM	1@1	23.53	20.23	0.1054
77	30	20	664666	3969.99	DFT-s-OFDM 16 QAM	1@49	23.26	19.96	0.0991
77	30	25	647500	3712.5	DFT-s-OFDM QPSK	32@16	23.22	19.92	0.0982
77	30	25	647500	3712.5	DFT-s-OFDM QPSK	1@1	22.7	19.4	0.0871
77	30	25	647500	3712.5	DFT-s-OFDM QPSK	1@63	23.74	20.44	0.1107
77	30	25	647500	3712.5	DFT-s-OFDM 16 QAM	32@16	22.26	18.96	0.0787
77	30	25	647500	3712.5	DFT-s-OFDM 16 QAM	1@1	21.75	18.45	0.0700
77	30	25	647500	3712.5	DFT-s-OFDM 16 QAM	1@63	22.77	19.47	0.0885
77	30	25	656000	3840	DFT-s-OFDM QPSK	32@16	23.46	20.16	0.1038
77	30	25	656000	3840	DFT-s-OFDM QPSK	1@1	23.49	20.19	0.1045
77	30	25	656000	3840	DFT-s-OFDM QPSK	1@63	22.77	19.47	0.0885
77	30	25	656000	3840	DFT-s-OFDM 16 QAM	32@16	22.5	19.2	0.0832
77	30	25	656000	3840	DFT-s-OFDM 16 QAM	1@1	22.57	19.27	0.0845
77	30	25	656000	3840	DFT-s-OFDM 16 QAM	1@63	21.78	18.48	0.0705
77	30	25	664500	3967.5	DFT-s-OFDM QPSK	32@16	23.81	20.51	0.1125
77	30	25	664500	3967.5	DFT-s-OFDM QPSK	1@1	23.88	20.58	0.1143
77	30	25	664500	3967.5	DFT-s-OFDM QPSK	1@63	23.87	20.57	0.1140
77	30	25	664500	3967.5	DFT-s-OFDM 16 QAM	32@16	23.13	19.83	0.0962
77	30	25	664500	3967.5	DFT-s-OFDM 16 QAM	1@1	23.4	20.1	0.1023
77	30	25	664500	3967.5	DFT-s-OFDM 16 QAM	1@63	23.21	19.91	0.0979



NR Band	SCS	BandWidth	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
77	30	30	647668	3715.02	DFT-s-OFDM QPSK	36@18	23.31	20.01	0.1002
77	30	30	647668	3715.02	DFT-s-OFDM QPSK	1@1	22.76	19.46	0.0883
77	30	30	647668	3715.02	DFT-s-OFDM QPSK	1@76	23.81	20.51	0.1125
77	30	30	647668	3715.02	DFT-s-OFDM 16 QAM	36@18	22.35	19.05	0.0804
77	30	30	647668	3715.02	DFT-s-OFDM 16 QAM	1@1	21.77	18.47	0.0703
77	30	30	647668	3715.02	DFT-s-OFDM 16 QAM	1@76	22.87	19.57	0.0906
77	30	30	656000	3840	DFT-s-OFDM QPSK	36@18	23.48	20.18	0.1042
77	30	30	656000	3840	DFT-s-OFDM QPSK	1@1	23.41	20.11	0.1026
77	30	30	656000	3840	DFT-s-OFDM QPSK	1@76	22.59	19.29	0.0849
77	30	30	656000	3840	DFT-s-OFDM 16 QAM	36@18	22.46	19.16	0.0824
77	30	30	656000	3840	DFT-s-OFDM 16 QAM	1@1	22.5	19.2	0.0832
77	30	30	656000	3840	DFT-s-OFDM 16 QAM	1@76	21.65	18.35	0.0684
77	30	30	664332	3964.98	DFT-s-OFDM QPSK	36@18	23.82	20.52	0.1127
77	30	30	664332	3964.98	DFT-s-OFDM QPSK	1@1	23.87	20.57	0.1140
77	30	30	664332	3964.98	DFT-s-OFDM QPSK	1@76	23.88	20.58	0.1143
77	30	30	664332	3964.98	DFT-s-OFDM 16 QAM	36@18	23.44	20.14	0.1033
77	30	30	664332	3964.98	DFT-s-OFDM 16 QAM	1@1	23.21	19.91	0.0979
77	30	30	664332	3964.98	DFT-s-OFDM 16 QAM	1@76	23.18	19.88	0.0973
77	30	40	648000	3720	DFT-s-OFDM QPSK	50@25	23.51	20.21	0.1050
77	30	40	648000	3720	DFT-s-OFDM QPSK	1@1	22.73	19.43	0.0877
77	30	40	648000	3720	DFT-s-OFDM QPSK	1@104	23.46	20.16	0.1038
77	30	40	648000	3720	DFT-s-OFDM 16 QAM	50@25	22.57	19.27	0.0845
77	30	40	648000	3720	DFT-s-OFDM 16 QAM	1@1	21.71	18.41	0.0693
77	30	40	648000	3720	DFT-s-OFDM 16 QAM	1@104	22.55	19.25	0.0841
77	30	40	656000	3840	DFT-s-OFDM QPSK	50@25	23.46	20.16	0.1038
77	30	40	656000	3840	DFT-s-OFDM QPSK	1@1	23.3	20	0.1000
77	30	40	656000	3840	DFT-s-OFDM QPSK	1@104	22.34	19.04	0.0802
77	30	40	656000	3840	DFT-s-OFDM 16 QAM	50@25	22.48	19.18	0.0828
77	30	40	656000	3840	DFT-s-OFDM 16 QAM	1@1	22.31	19.01	0.0796
77	30	40	656000	3840	DFT-s-OFDM 16 QAM	1@104	21.43	18.13	0.0650
77	30	40	664000	3960	DFT-s-OFDM QPSK	50@25	23.82	20.52	0.1127
77	30	40	664000	3960	DFT-s-OFDM QPSK	1@1	23.42	20.12	0.1028
77	30	40	664000	3960	DFT-s-OFDM QPSK	1@104	23.81	20.51	0.1125
77	30	40	664000	3960	DFT-s-OFDM 16 QAM	50@25	23.5	20.2	0.1047
77	30	40	664000	3960	DFT-s-OFDM 16 QAM	1@1	22.52	19.22	0.0836
77	30	40	664000	3960	DFT-s-OFDM 16 QAM	1@104	23.24	19.94	0.0986
77	30	50	648334	3725.01	DFT-s-OFDM QPSK	64@32	23.7	20.4	0.1096
77	30	50	648334	3725.01	DFT-s-OFDM QPSK	1@1	22.68	19.38	0.0867
77	30	50	648334	3725.01	DFT-s-OFDM QPSK	1@131	22.83	19.53	0.0897



NR Band	SCS	BandWidth	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
77	30	50	648334	3725.01	DFT-s-OFDM 16 QAM	64@32	22.7	19.4	0.0871
77	30	50	648334	3725.01	DFT-s-OFDM 16 QAM	1@1	21.72	18.42	0.0695
77	30	50	648334	3725.01	DFT-s-OFDM 16 QAM	1@131	21.83	18.53	0.0713
77	30	50	656000	3840	DFT-s-OFDM QPSK	64@32	23.42	20.12	0.1028
77	30	50	656000	3840	DFT-s-OFDM QPSK	1@1	23.17	19.87	0.0971
77	30	50	656000	3840	DFT-s-OFDM QPSK	1@131	22.24	18.94	0.0783
77	30	50	656000	3840	DFT-s-OFDM 16 QAM	64@32	22.43	19.13	0.0818
77	30	50	656000	3840	DFT-s-OFDM 16 QAM	1@1	22.24	18.94	0.0783
77	30	50	656000	3840	DFT-s-OFDM 16 QAM	1@131	21.28	17.98	0.0628
77	30	50	663666	3954.99	DFT-s-OFDM QPSK	64@32	23.88	20.58	0.1143
77	30	50	663666	3954.99	DFT-s-OFDM QPSK	1@1	22.68	19.38	0.0867
77	30	50	663666	3954.99	DFT-s-OFDM QPSK	1@131	23.81	20.51	0.1125
77	30	50	663666	3954.99	DFT-s-OFDM 16 QAM	64@32	23.24	19.94	0.0986
77	30	50	663666	3954.99	DFT-s-OFDM 16 QAM	1@1	21.72	18.42	0.0695
77	30	50	663666	3954.99	DFT-s-OFDM 16 QAM	1@131	23.15	19.85	0.0966
77	30	60	648668	3730.02	DFT-s-OFDM QPSK	81@40	23.56	20.26	0.1062
77	30	60	648668	3730.02	DFT-s-OFDM QPSK	1@1	22.63	19.33	0.0857
77	30	60	648668	3730.02	DFT-s-OFDM QPSK	1@160	22.34	19.04	0.0802
77	30	60	648668	3730.02	DFT-s-OFDM 16 QAM	81@40	22.6	19.3	0.0851
77	30	60	648668	3730.02	DFT-s-OFDM 16 QAM	1@1	21.68	18.38	0.0689
77	30	60	648668	3730.02	DFT-s-OFDM 16 QAM	1@160	21.41	18.11	0.0647
77	30	60	656000	3840	DFT-s-OFDM QPSK	81@40	23.29	19.99	0.0998
77	30	60	656000	3840	DFT-s-OFDM QPSK	1@1	23.24	19.94	0.0986
77	30	60	656000	3840	DFT-s-OFDM QPSK	1@160	22.33	19.03	0.0800
77	30	60	656000	3840	DFT-s-OFDM 16 QAM	81@40	22.33	19.03	0.0800
77	30	60	656000	3840	DFT-s-OFDM 16 QAM	1@1	22.21	18.91	0.0778
77	30	60	656000	3840	DFT-s-OFDM 16 QAM	1@160	21.38	18.08	0.0643
77	30	60	663332	3949.98	DFT-s-OFDM QPSK	81@40	23.82	20.52	0.1127
77	30	60	663332	3949.98	DFT-s-OFDM QPSK	1@1	22.61	19.31	0.0853
77	30	60	663332	3949.98	DFT-s-OFDM QPSK	1@160	23.83	20.53	0.1130
77	30	60	663332	3949.98	DFT-s-OFDM 16 QAM	81@40	23.05	19.75	0.0944
77	30	60	663332	3949.98	DFT-s-OFDM 16 QAM	1@1	21.7	18.4	0.0692
77	30	60	663332	3949.98	DFT-s-OFDM 16 QAM	1@160	23.28	19.98	0.0995
77	30	70	649000	3735	DFT-s-OFDM QPSK	90@45	23.61	20.31	0.1074
77	30	70	649000	3735	DFT-s-OFDM QPSK	1@1	22.74	19.44	0.0879
77	30	70	649000	3735	DFT-s-OFDM QPSK	1@187	22.49	19.19	0.0830
77	30	70	649000	3735	DFT-s-OFDM 16 QAM	90@45	22.66	19.36	0.0863
77	30	70	649000	3735	DFT-s-OFDM 16 QAM	1@1	21.76	18.46	0.0701
77	30	70	649000	3735	DFT-s-OFDM 16 QAM	1@187	21.52	18.22	0.0664



NR Band	SCS	BandWidth	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
77	30	70	656000	3840	DFT-s-OFDM QPSK	90@45	23.3	20	0.1000
77	30	70	656000	3840	DFT-s-OFDM QPSK	1@1	23.28	19.98	0.0995
77	30	70	656000	3840	DFT-s-OFDM QPSK	1@187	22.49	19.19	0.0830
77	30	70	656000	3840	DFT-s-OFDM 16 QAM	90@45	22.35	19.05	0.0804
77	30	70	656000	3840	DFT-s-OFDM 16 QAM	1@1	22.32	19.02	0.0798
77	30	70	656000	3840	DFT-s-OFDM 16 QAM	1@187	21.55	18.25	0.0668
77	30	70	663000	3945	DFT-s-OFDM QPSK	90@45	23.75	20.45	0.1109
77	30	70	663000	3945	DFT-s-OFDM QPSK	1@1	23.28	19.98	0.0995
77	30	70	663000	3945	DFT-s-OFDM QPSK	1@187	23.82	20.52	0.1127
77	30	70	663000	3945	DFT-s-OFDM 16 QAM	90@45	22.81	19.51	0.0893
77	30	70	663000	3945	DFT-s-OFDM 16 QAM	1@1	22.3	19	0.0794
77	30	70	663000	3945	DFT-s-OFDM 16 QAM	1@187	23.33	20.03	0.1007
77	30	80	649334	3740.01	DFT-s-OFDM QPSK	108@54	23.4	20.1	0.1023
77	30	80	649334	3740.01	DFT-s-OFDM QPSK	1@1	22.76	19.46	0.0883
77	30	80	649334	3740.01	DFT-s-OFDM QPSK	1@215	23.13	19.83	0.0962
77	30	80	649334	3740.01	DFT-s-OFDM 16 QAM	108@54	22.45	19.15	0.0822
77	30	80	649334	3740.01	DFT-s-OFDM 16 QAM	1@1	21.78	18.48	0.0705
77	30	80	649334	3740.01	DFT-s-OFDM 16 QAM	1@215	22.17	18.87	0.0771
77	30	80	656000	3840	DFT-s-OFDM QPSK	108@54	23.22	19.92	0.0982
77	30	80	656000	3840	DFT-s-OFDM QPSK	1@1	23.38	20.08	0.1019
77	30	80	656000	3840	DFT-s-OFDM QPSK	1@215	22.93	19.63	0.0918
77	30	80	656000	3840	DFT-s-OFDM 16 QAM	108@54	22.22	18.92	0.0780
77	30	80	656000	3840	DFT-s-OFDM 16 QAM	1@1	22.42	19.12	0.0817
77	30	80	656000	3840	DFT-s-OFDM 16 QAM	1@215	21.96	18.66	0.0735
77	30	80	662666	3939.99	DFT-s-OFDM QPSK	108@54	23.48	20.18	0.1042
77	30	80	662666	3939.99	DFT-s-OFDM QPSK	1@1	23.82	20.52	0.1127
77	30	80	662666	3939.99	DFT-s-OFDM QPSK	1@215	23.88	20.58	0.1143
77	30	80	662666	3939.99	DFT-s-OFDM 16 QAM	108@54	22.53	19.23	0.0838
77	30	80	662666	3939.99	DFT-s-OFDM 16 QAM	1@1	23.02	19.72	0.0938
77	30	80	662666	3939.99	DFT-s-OFDM 16 QAM	1@215	23.31	20.01	0.1002
77	30	90	649668	3745.02	DFT-s-OFDM QPSK	120@60	23.31	20.01	0.1002
77	30	90	649668	3745.02	DFT-s-OFDM QPSK	1@1	22.79	19.49	0.0889
77	30	90	649668	3745.02	DFT-s-OFDM QPSK	1@243	23.42	20.12	0.1028
77	30	90	649668	3745.02	DFT-s-OFDM 16 QAM	120@60	22.3	19	0.0794
77	30	90	649668	3745.02	DFT-s-OFDM 16 QAM	1@1	21.81	18.51	0.0710
77	30	90	649668	3745.02	DFT-s-OFDM 16 QAM	1@243	22.49	19.19	0.0830
77	30	90	656000	3840	DFT-s-OFDM QPSK	120@60	23.21	19.91	0.0979
77	30	90	656000	3840	DFT-s-OFDM QPSK	1@1	23.45	20.15	0.1035
77	30	90	656000	3840	DFT-s-OFDM QPSK	1@243	23.25	19.95	0.0989



NR Band	SCS	BandWidth	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
77	30	90	656000	3840	DFT-s-OFDM 16 QAM	120@60	22.24	18.94	0.0783
77	30	90	656000	3840	DFT-s-OFDM 16 QAM	1@1	22.54	19.24	0.0839
77	30	90	656000	3840	DFT-s-OFDM 16 QAM	1@243	22.34	19.04	0.0802
77	30	90	662332	3934.98	DFT-s-OFDM QPSK	120@60	23.26	19.96	0.0991
77	30	90	662332	3934.98	DFT-s-OFDM QPSK	1@1	23.88	20.58	0.1143
77	30	90	662332	3934.98	DFT-s-OFDM QPSK	1@243	23.82	20.52	0.1127
77	30	90	662332	3934.98	DFT-s-OFDM 16 QAM	120@60	22.3	19	0.0794
77	30	90	662332	3934.98	DFT-s-OFDM 16 QAM	1@1	23.06	19.76	0.0946
77	30	90	662332	3934.98	DFT-s-OFDM 16 QAM	1@243	23.12	19.82	0.0959
77	30	100	650000	3750	DFT-s-OFDM PI/2 BPSK	135@67	23.51	20.21	0.1050
77	30	100	650000	3750	DFT-s-OFDM PI/2 BPSK	1@1	23.2	19.9	0.0977
77	30	100	650000	3750	DFT-s-OFDM PI/2 BPSK	1@271	23.83	20.53	0.1130
77	30	100	650000	3750	DFT-s-OFDM QPSK	135@67	23.57	20.27	0.1064
77	30	100	650000	3750	DFT-s-OFDM QPSK	1@1	23.11	19.81	0.0957
77	30	100	650000	3750	DFT-s-OFDM QPSK	1@271	23.78	20.48	0.1117
77	30	100	650000	3750	DFT-s-OFDM 16 QAM	135@67	22.56	19.26	0.0843
77	30	100	650000	3750	DFT-s-OFDM 16 QAM	1@1	22.21	18.91	0.0778
77	30	100	650000	3750	DFT-s-OFDM 16 QAM	1@271	22.83	19.53	0.0897
77	30	100	650000	3750	DFT-s-OFDM 64 QAM	135@67	21.12	17.82	0.0605
77	30	100	650000	3750	DFT-s-OFDM 64 QAM	1@1	20.57	17.27	0.0533
77	30	100	650000	3750	DFT-s-OFDM 64 QAM	1@271	21.22	17.92	0.0619
77	30	100	650000	3750	DFT-s-OFDM 256 QAM	135@67	19.09	15.79	0.0379
77	30	100	650000	3750	DFT-s-OFDM 256 QAM	1@1	18.52	15.22	0.0333
77	30	100	650000	3750	DFT-s-OFDM 256 QAM	1@271	19.19	15.89	0.0388
77	30	100	650000	3750	CP-OFDM QPSK	137@68	21.97	18.67	0.0736
77	30	100	650000	3750	CP-OFDM QPSK	1@1	21.63	18.33	0.0681
77	30	100	650000	3750	CP-OFDM QPSK	1@271	22.35	19.05	0.0804
77	30	100	656000	3840	DFT-s-OFDM PI/2 BPSK	135@67	23.53	20.23	0.1054
77	30	100	656000	3840	DFT-s-OFDM PI/2 BPSK	1@1	23.94	20.64	0.1159
77	30	100	656000	3840	DFT-s-OFDM PI/2 BPSK	1@271	23.89	20.59	0.1146
77	30	100	656000	3840	DFT-s-OFDM QPSK	135@67	23.57	20.27	0.1064
77	30	100	656000	3840	DFT-s-OFDM QPSK	1@1	23.92	20.62	0.1153
77	30	100	656000	3840	DFT-s-OFDM QPSK	1@271	23.81	20.51	0.1125
77	30	100	656000	3840	DFT-s-OFDM 16 QAM	135@67	22.57	19.27	0.0845
77	30	100	656000	3840	DFT-s-OFDM 16 QAM	1@1	22.97	19.67	0.0927
77	30	100	656000	3840	DFT-s-OFDM 16 QAM	1@271	23.06	19.76	0.0946
77	30	100	656000	3840	DFT-s-OFDM 64 QAM	135@67	21.09	17.79	0.0601
77	30	100	656000	3840	DFT-s-OFDM 64 QAM	1@1	21.39	18.09	0.0644
77	30	100	656000	3840	DFT-s-OFDM 64 QAM	1@271	21.52	18.22	0.0664



NR Band	SCS	BandWidth	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
77	30	100	656000	3840	DFT-s-OFDM 256 QAM	135@67	19.15	15.85	0.0385
77	30	100	656000	3840	DFT-s-OFDM 256 QAM	1@1	19.37	16.07	0.0405
77	30	100	656000	3840	DFT-s-OFDM 256 QAM	1@271	19.55	16.25	0.0422
77	30	100	656000	3840	CP-OFDM QPSK	137@68	21.99	18.69	0.0740
77	30	100	656000	3840	CP-OFDM QPSK	1@1	22.35	19.05	0.0804
77	30	100	656000	3840	CP-OFDM QPSK	1@271	22.71	19.41	0.0873
77	30	100	662000	3930	DFT-s-OFDM PI/2 BPSK	135@67	23.59	20.29	0.1069
77	30	100	662000	3930	DFT-s-OFDM PI/2 BPSK	1@1	23.79	20.49	0.1119
77	30	100	662000	3930	DFT-s-OFDM PI/2 BPSK	1@271	23.83	20.53	0.1130
77	30	100	662000	3930	DFT-s-OFDM QPSK	135@67	23.68	20.38	0.1091
77	30	100	662000	3930	DFT-s-OFDM QPSK	1@1	23.82	20.52	0.1127
77	30	100	662000	3930	DFT-s-OFDM QPSK	1@271	23.82	20.52	0.1127
77	30	100	662000	3930	DFT-s-OFDM 16 QAM	135@67	22.7	19.4	0.0871
77	30	100	662000	3930	DFT-s-OFDM 16 QAM	1@1	22.82	19.52	0.0895
77	30	100	662000	3930	DFT-s-OFDM 16 QAM	1@271	23.53	20.23	0.1054
77	30	100	662000	3930	DFT-s-OFDM 64 QAM	135@67	21.22	17.92	0.0619
77	30	100	662000	3930	DFT-s-OFDM 64 QAM	1@1	21.31	18.01	0.0632
77	30	100	662000	3930	DFT-s-OFDM 64 QAM	1@271	21.98	18.68	0.0738
77	30	100	662000	3930	DFT-s-OFDM 256 QAM	135@67	19.24	15.94	0.0393
77	30	100	662000	3930	DFT-s-OFDM 256 QAM	1@1	19.24	15.94	0.0393
77	30	100	662000	3930	DFT-s-OFDM 256 QAM	1@271	20.01	16.71	0.0469
77	30	100	662000	3930	CP-OFDM QPSK	137@68	22.16	18.86	0.0769
77	30	100	662000	3930	CP-OFDM QPSK	1@1	22.29	18.99	0.0793
77	30	100	662000	3930	CP-OFDM QPSK	1@271	23.2	19.9	0.0977



Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (Hz)	Verdict	Environment
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	16.6	PASS	NV
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	13.6	PASS	LV
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	14.9	PASS	HV
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	15.3	PASS	-30°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	11.1	PASS	-20°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	18.7	PASS	-10°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	16.5	PASS	0°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	12.3	PASS	10°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	16.6	PASS	20°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	12	PASS	30°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	11.9	PASS	40°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	11.8	PASS	50°C

 $|\text{MAX}(\Delta f)| = 18.7 \text{ Hz}$

Frequency Stability	Frequency (MHz)	Limit Line	Result
$f_L - \text{MAX}(\Delta f) $	3700.859181	$\geq 3700 \text{ MHz}$	PASS
$f_H + \text{MAX}(\Delta f) $	3978.741219	$\leq 3980 \text{ MHz}$	



Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
77	30	20	656000	3840.0	DFT-s-OFDM PI/2 BPSK	50@0	3.99	13	PASS
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	5.11	13	PASS



N77(20M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH



N77(20M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH



**Occupied Bandwidth**

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
77	30	10	656000	3840.0	CP-OFDM QPSK	24@0	8.5809	9.067
77	30	10	656000	3840.0	CP-OFDM 16 QAM	24@0	8.5517	9.129
77	30	10	656000	3840.0	CP-OFDM 64 QAM	24@0	8.5843	9.217
77	30	10	656000	3840.0	CP-OFDM 256 QAM	24@0	8.5452	9.037
77	30	15	656000	3840.0	CP-OFDM QPSK	38@0	13.577	14.16
77	30	15	656000	3840.0	CP-OFDM 16 QAM	38@0	13.595	14.33
77	30	15	656000	3840.0	CP-OFDM 64 QAM	38@0	13.549	14.31
77	30	15	656000	3840.0	CP-OFDM 256 QAM	38@0	13.598	14.33
77	30	20	656000	3840.0	CP-OFDM QPSK	51@0	18.217	19.06
77	30	20	656000	3840.0	CP-OFDM 16 QAM	51@0	18.181	19.0
77	30	20	656000	3840.0	CP-OFDM 64 QAM	51@0	18.265	18.95
77	30	20	656000	3840.0	CP-OFDM 256 QAM	51@0	18.185	18.89
77	30	25	656000	3840.0	CP-OFDM QPSK	65@0	23.162	24.09
77	30	25	656000	3840.0	CP-OFDM 16 QAM	65@0	23.188	24.09
77	30	25	656000	3840.0	CP-OFDM 64 QAM	65@0	23.264	24.26
77	30	25	656000	3840.0	CP-OFDM 256 QAM	65@0	23.248	24.14
77	30	30	656000	3840.0	CP-OFDM QPSK	78@0	27.728	29.08
77	30	30	656000	3840.0	CP-OFDM 16 QAM	78@0	27.793	29.06
77	30	30	656000	3840.0	CP-OFDM 64 QAM	78@0	27.849	28.92
77	30	30	656000	3840.0	CP-OFDM 256 QAM	78@0	27.852	28.96
77	30	40	656000	3840.0	CP-OFDM QPSK	106@0	37.737	39.28
77	30	40	656000	3840.0	CP-OFDM 16 QAM	106@0	37.81	39.23




77	30	40	656000	3840.0	CP-OFDM 64 QAM	106@0	37.759	39.06
77	30	40	656000	3840.0	CP-OFDM 256 QAM	106@0	37.82	39.13
77	30	50	656000	3840.0	CP-OFDM QPSK	133@0	47.356	49.02
77	30	50	656000	3840.0	CP-OFDM 16 QAM	133@0	47.421	49.12
77	30	50	656000	3840.0	CP-OFDM 64 QAM	133@0	47.387	49.24
77	30	50	656000	3840.0	CP-OFDM 256 QAM	133@0	47.466	49.08
77	30	60	656000	3840.0	CP-OFDM QPSK	162@0	57.554	59.65
77	30	60	656000	3840.0	CP-OFDM 16 QAM	162@0	57.577	59.61
77	30	60	656000	3840.0	CP-OFDM 64 QAM	162@0	57.572	59.59
77	30	60	656000	3840.0	CP-OFDM 256 QAM	162@0	57.663	59.64
77	30	70	656000	3840.0	CP-OFDM QPSK	189@0	67.344	69.63
77	30	70	656000	3840.0	CP-OFDM 16 QAM	189@0	67.413	69.68
77	30	70	656000	3840.0	CP-OFDM 64 QAM	189@0	67.229	69.62
77	30	70	656000	3840.0	CP-OFDM 256 QAM	189@0	67.612	69.75
77	30	80	656000	3840.0	CP-OFDM QPSK	217@0	77.458	79.96
77	30	80	656000	3840.0	CP-OFDM 16 QAM	217@0	77.505	79.89
77	30	80	656000	3840.0	CP-OFDM 64 QAM	217@0	77.425	79.95
77	30	80	656000	3840.0	CP-OFDM 256 QAM	217@0	77.397	80.06
77	30	90	656000	3840.0	CP-OFDM QPSK	245@0	87.229	90.24
77	30	90	656000	3840.0	CP-OFDM 16 QAM	245@0	87.655	90.26
77	30	90	656000	3840.0	CP-OFDM 64 QAM	245@0	87.637	90.15
77	30	90	656000	3840.0	CP-OFDM 256 QAM	245@0	87.287	90.27
77	30	100	656000	3840.0	CP-OFDM QPSK	273@0	97.499	100.5
77	30	100	656000	3840.0	CP-OFDM 16 QAM	273@0	97.533	100.4
77	30	100	656000	3840.0	CP-OFDM 64 QAM	273@0	97.556	100.5




77	30	100	656000	3840.0	CP-OFDM 256 QAM	273@0	97.681	100.4
----	----	-----	--------	--------	--------------------	-------	--------	-------




N77(10M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

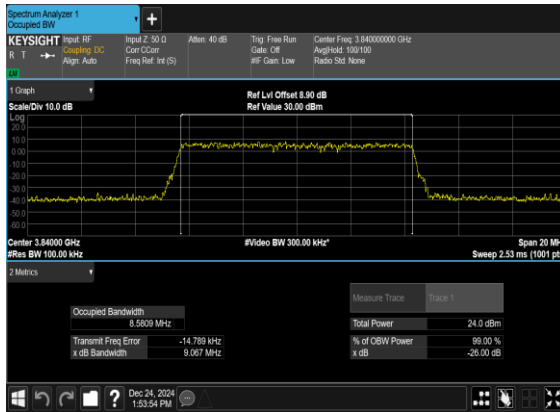


N77(10M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

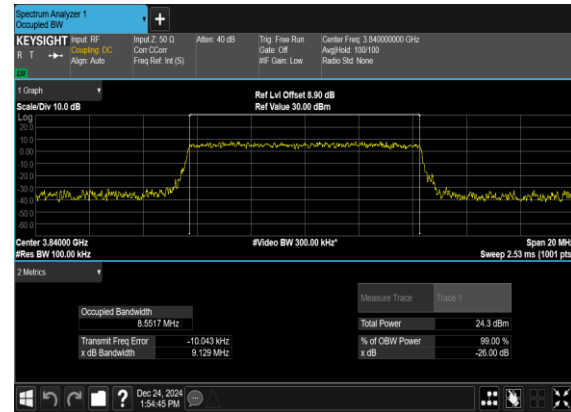

N77(10M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

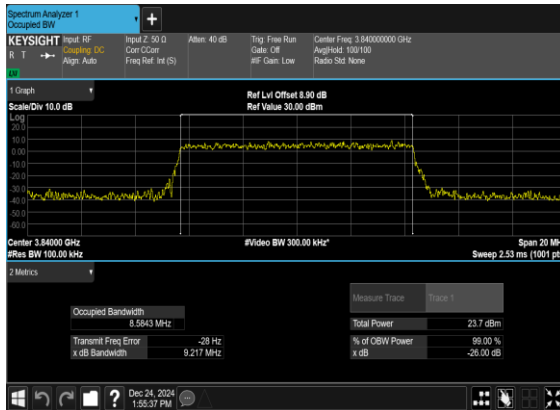


N77(10M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

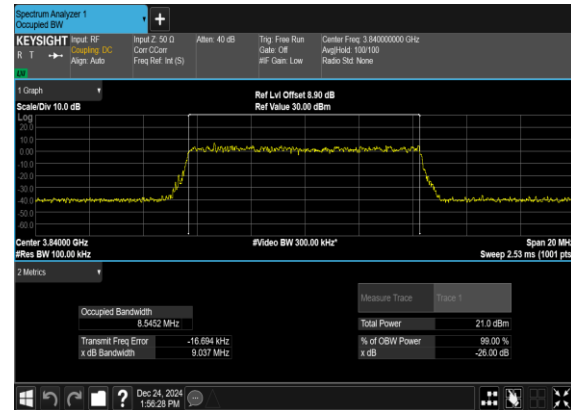





N77(15M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

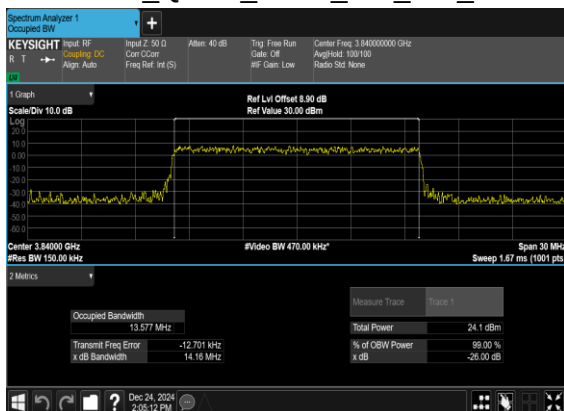


N77(15M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

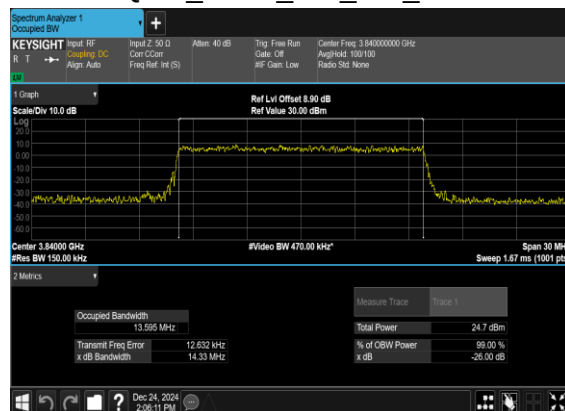

N77(15M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

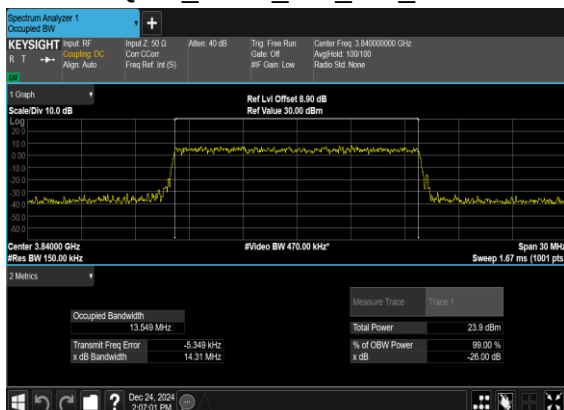


N77(15M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

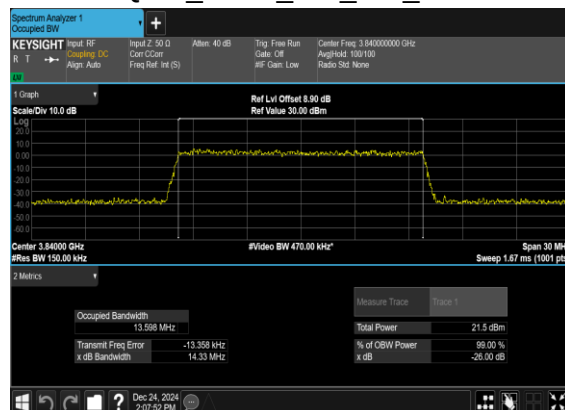





N77(20M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

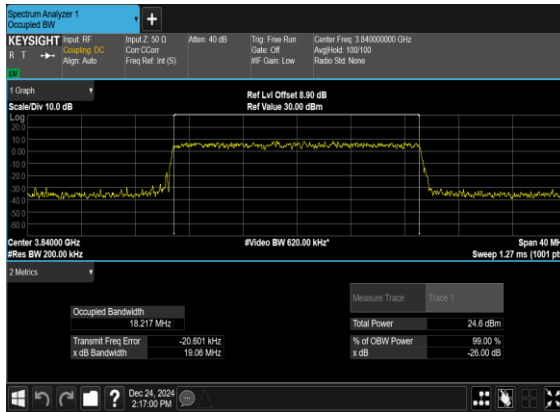


N77(20M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

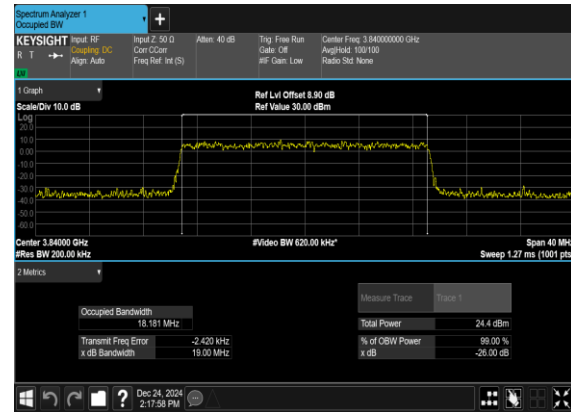

N77(20M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

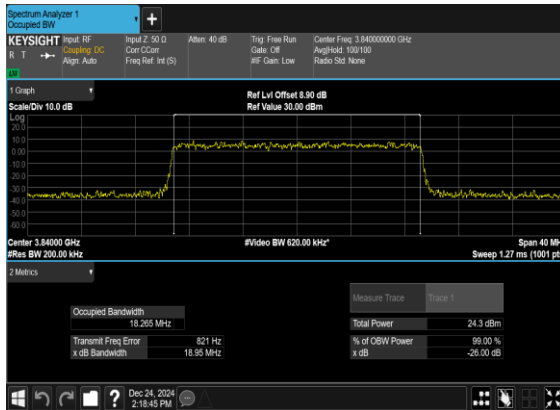


N77(20M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

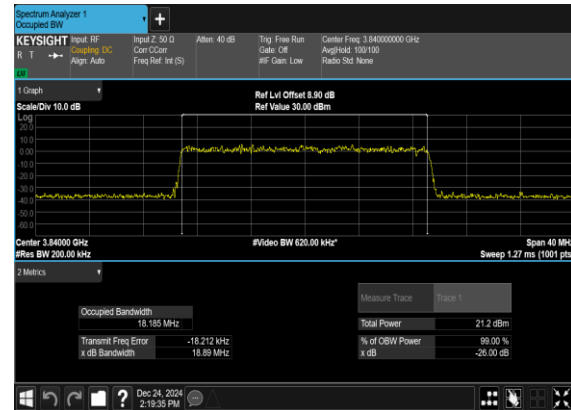





N77(25M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

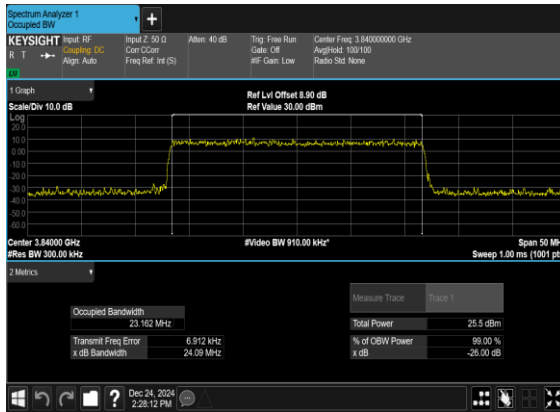


N77(25M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

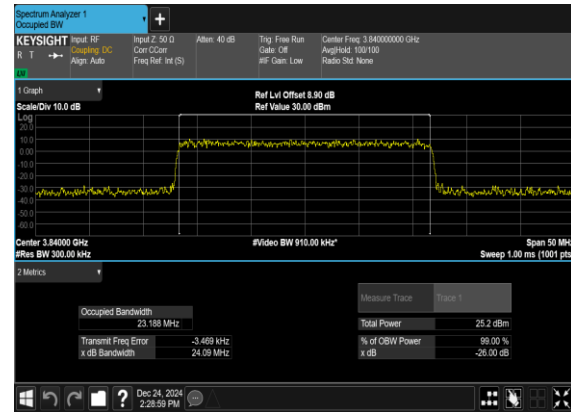

N77(25M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

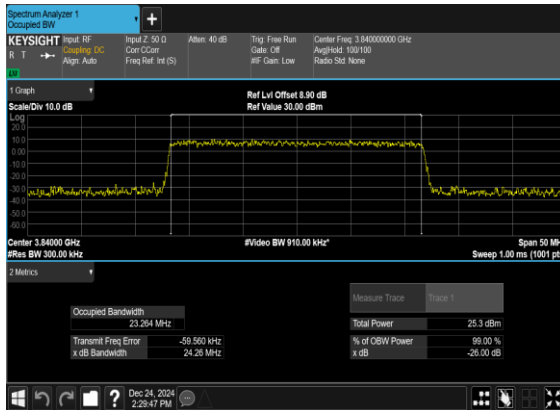


N77(25M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

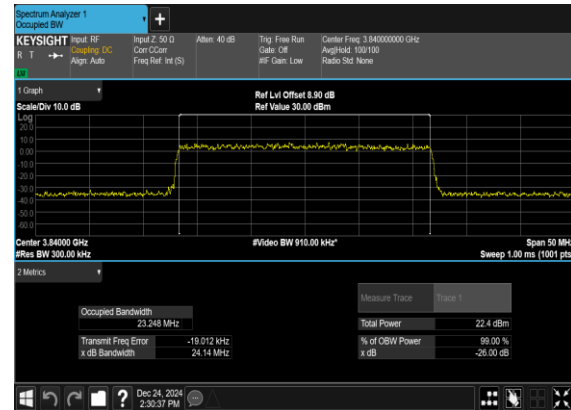





N77(30M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

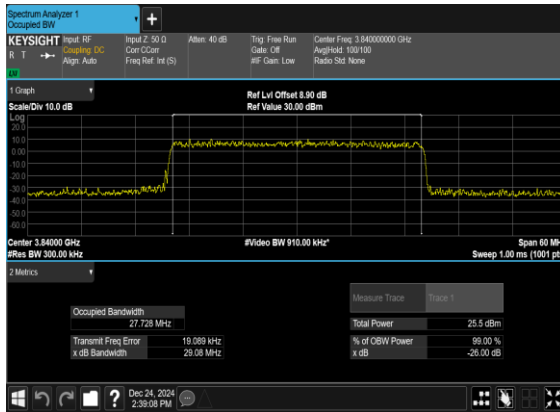


N77(30M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

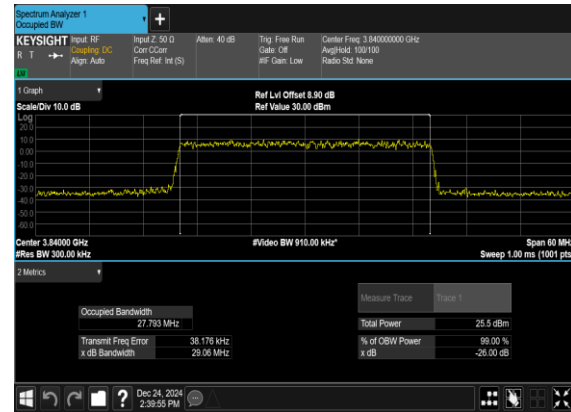

N77(30M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

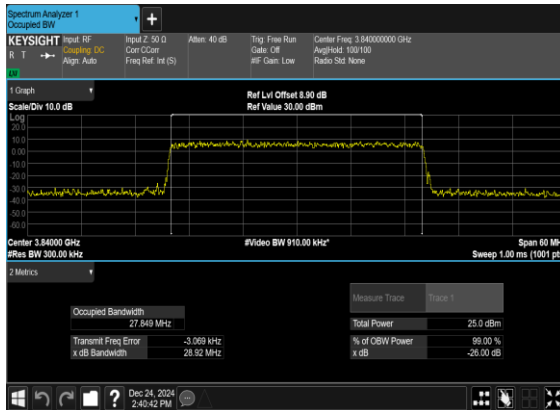


N77(30M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

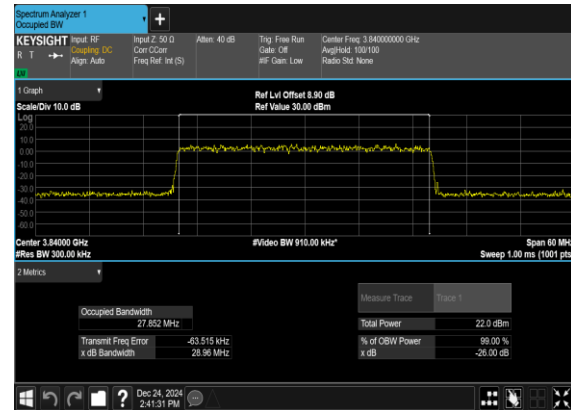





N77(40M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

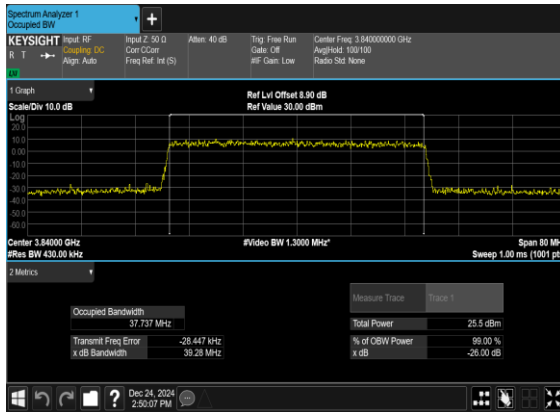


N77(40M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

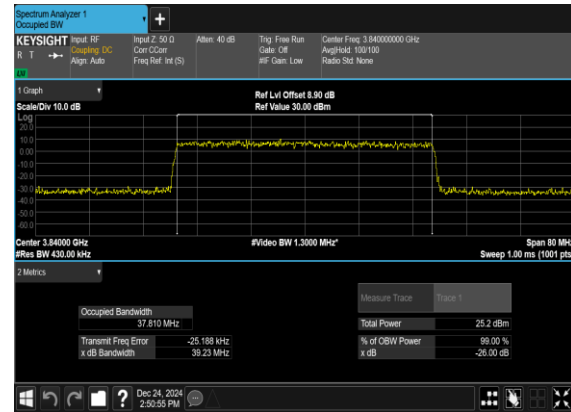

N77(40M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

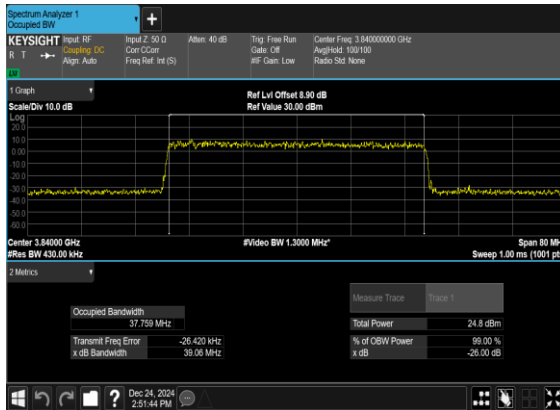


N77(40M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

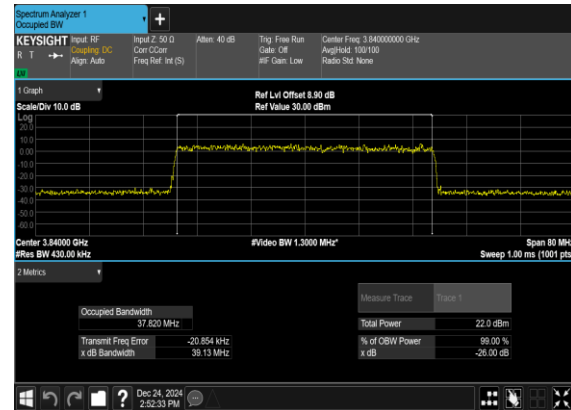





N77(50M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

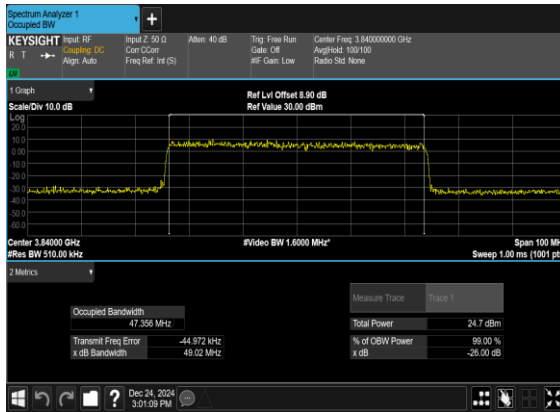


N77(50M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

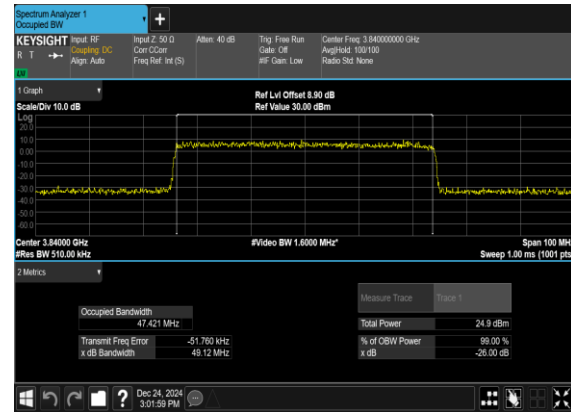

N77(50M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

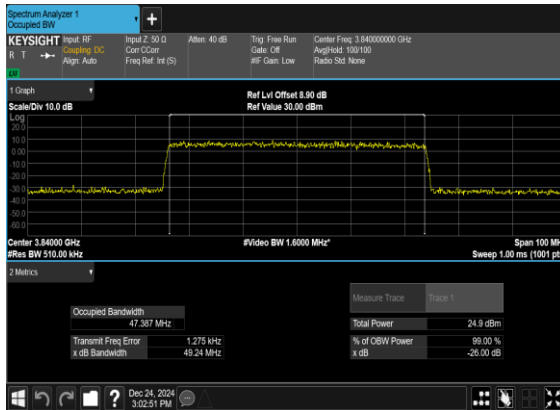


N77(50M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

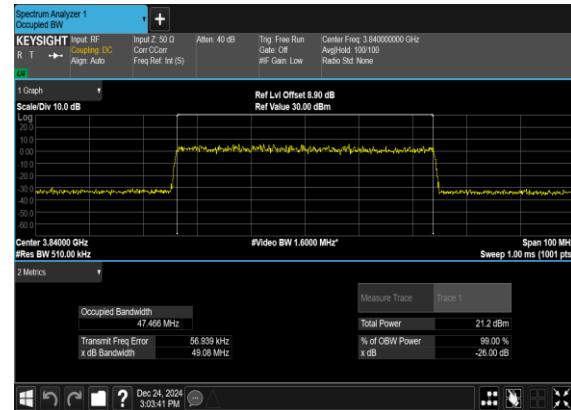





N77(60M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

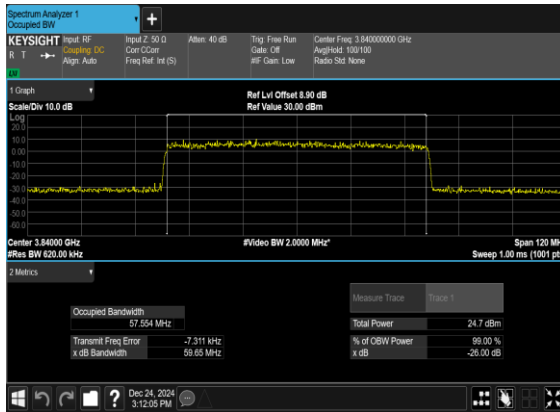


N77(60M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

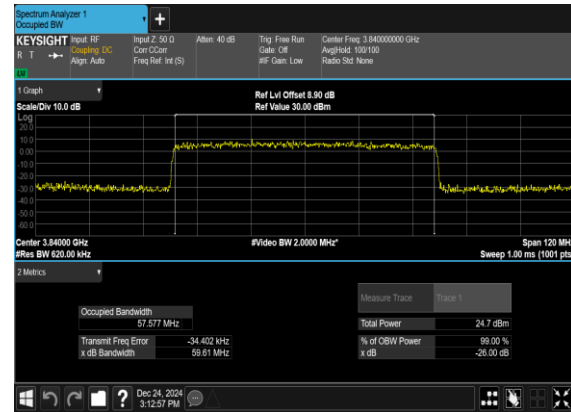

N77(60M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

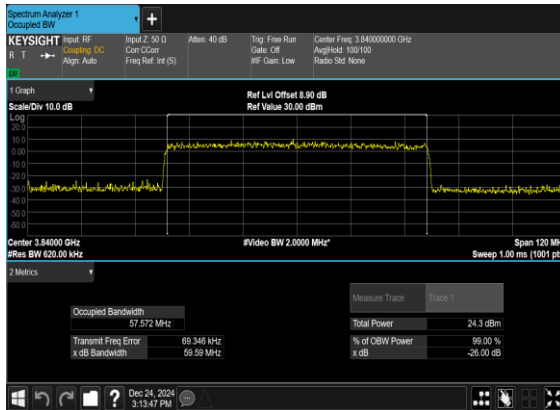


N77(60M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

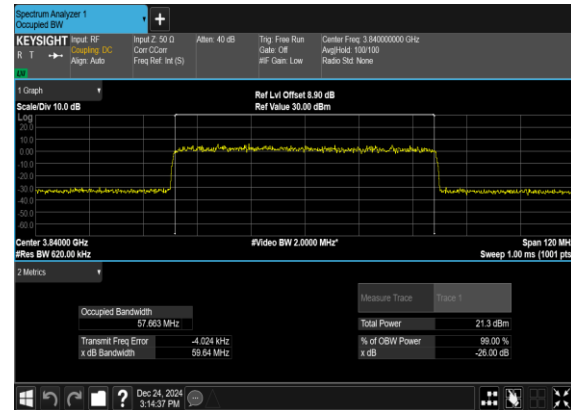





N77(70M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

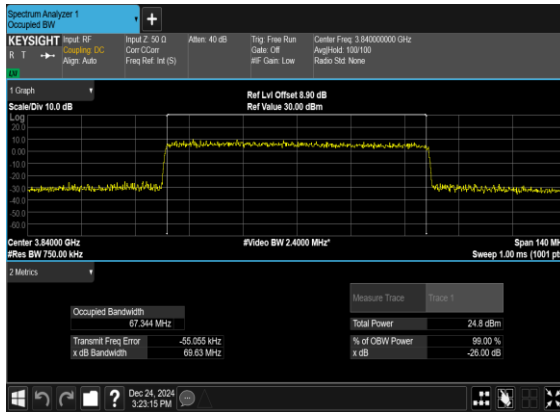


N77(70M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

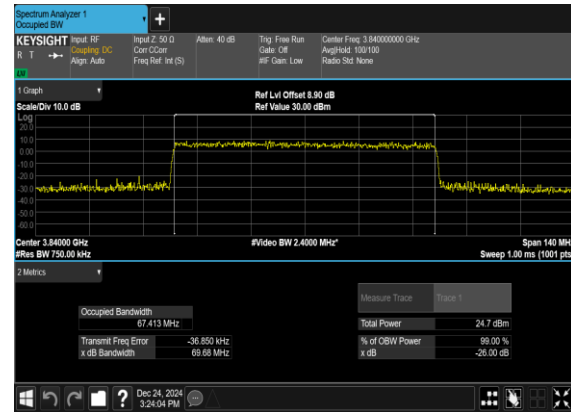

N77(70M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

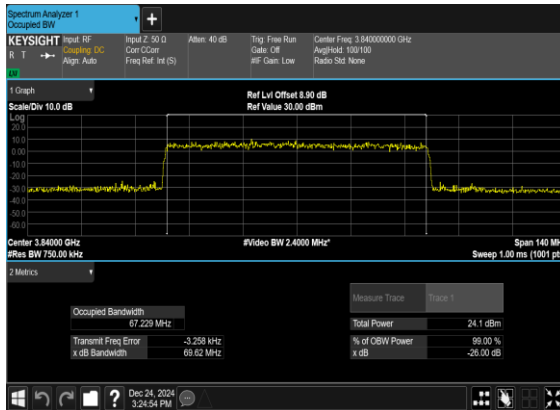


N77(70M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

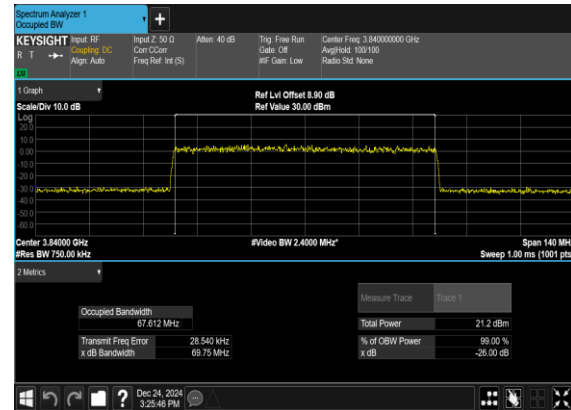





N77(80M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

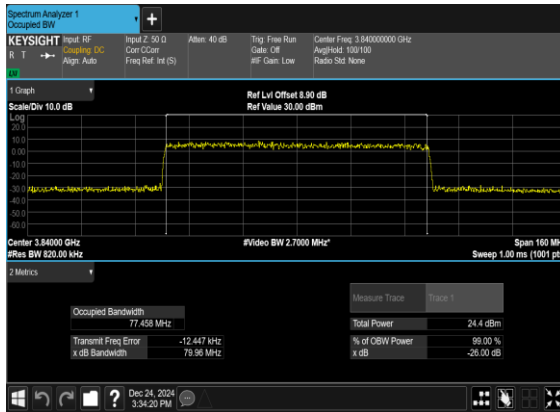


N77(80M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

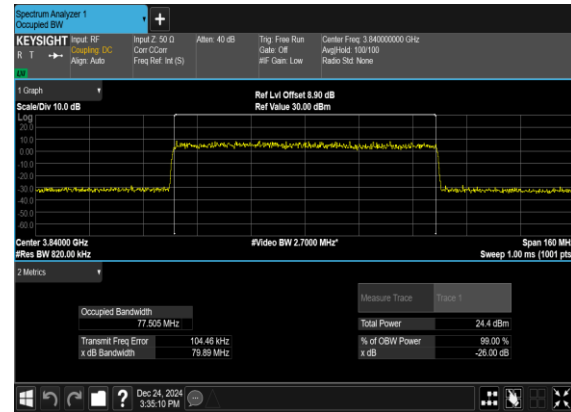

N77(80M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

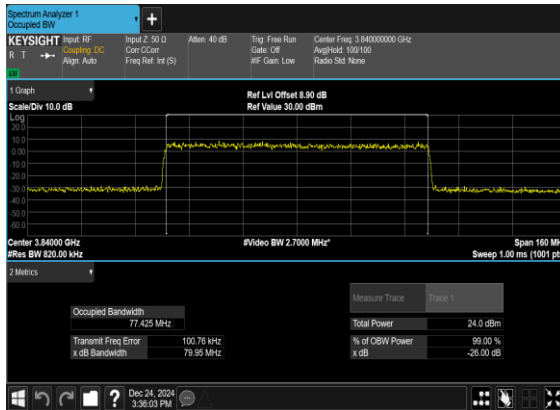


N77(80M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

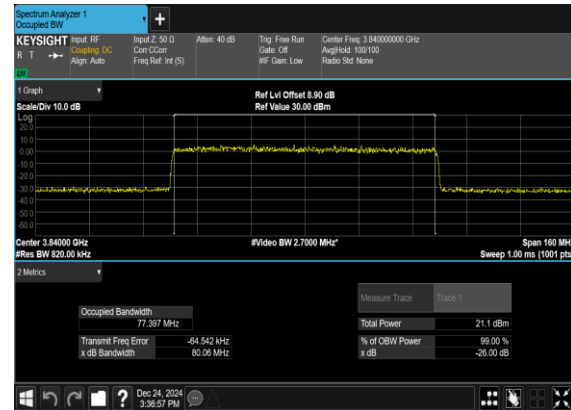





N77(90M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

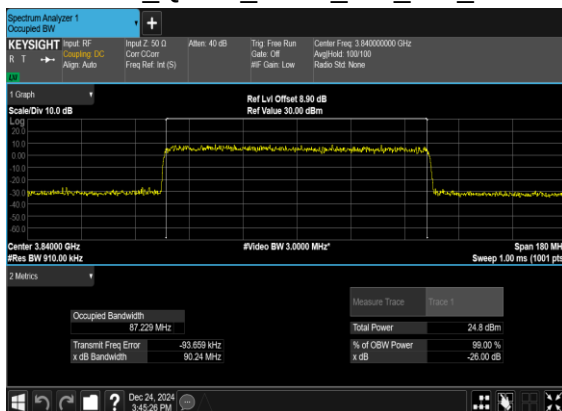


N77(90M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

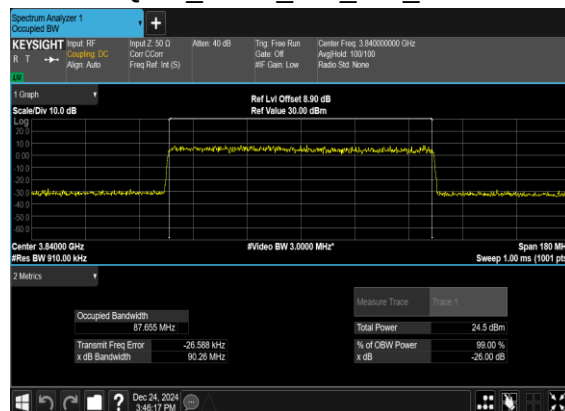

N77(90M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

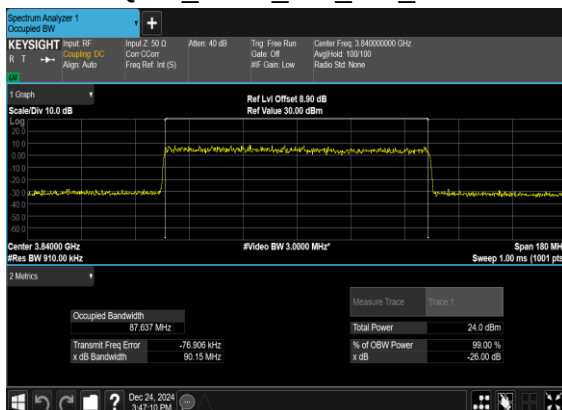


N77(90M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

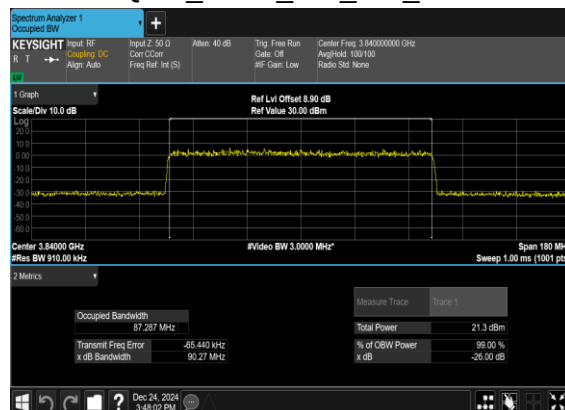





N77(100M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

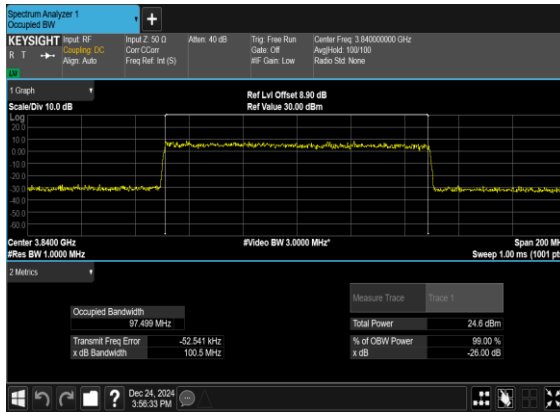


N77(100M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

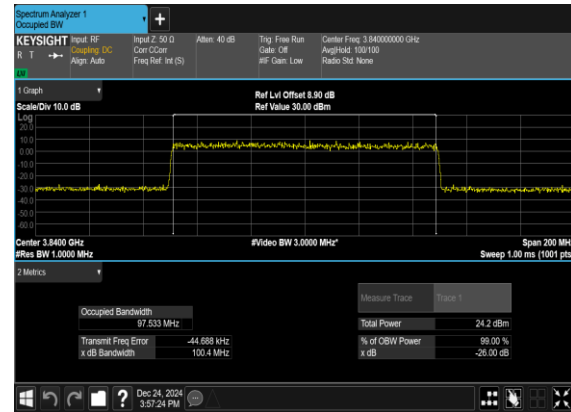

N77(100M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

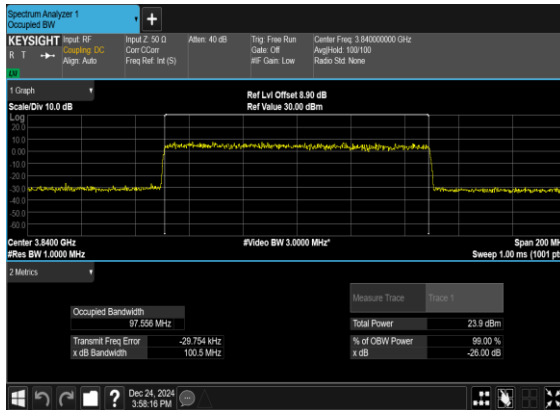

N77(100M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

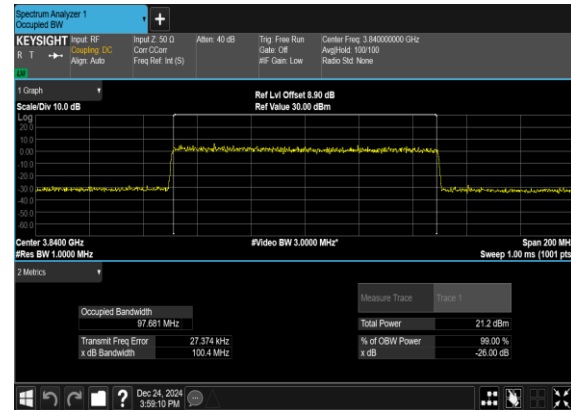

**Conducted Spurious Emissions**

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
77	30	10	647000	3705.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	10	647000	3705.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	10	647000	3705.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	10	647000	3705.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	10	647000	3705.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	10	647000	3705.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	10	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	10	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	10	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	10	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	10	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	10	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	10	665000	3975.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	10	665000	3975.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	10	665000	3975.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	10	665000	3975.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	10	665000	3975.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	10	665000	3975.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	50	648334	3725.01	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	50	648334	3725.01	DFT-s-OFDM BPSK	1@0	see graph	PASS




77	30	50	648334	3725.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	50	648334	3725.01	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	50	648334	3725.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	50	648334	3725.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	50	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	50	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	50	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	50	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	50	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	50	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	50	663666	3954.99	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	50	663666	3954.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	50	663666	3954.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	50	663666	3954.99	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	50	663666	3954.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	50	663666	3954.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	100	650000	3750.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	100	650000	3750.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM QPSK	1@0	see graph	PASS




77	30	100	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	100	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	100	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	100	662000	3930.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	100	662000	3930.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM QPSK	1@0	see graph	PASS




N77(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

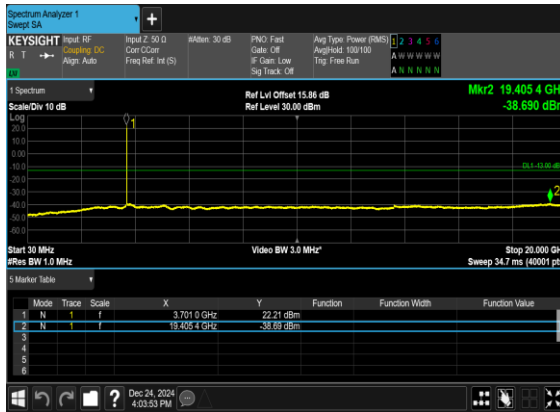


N77(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

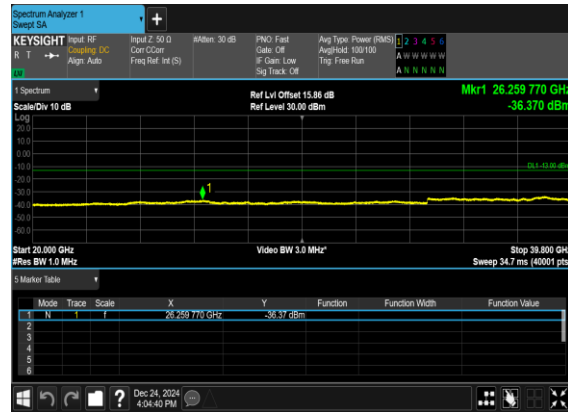

N77(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

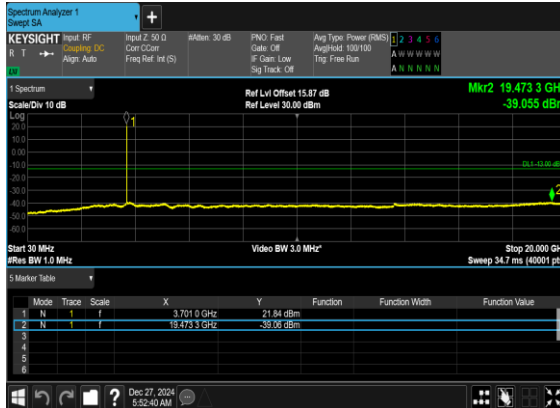


N77(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

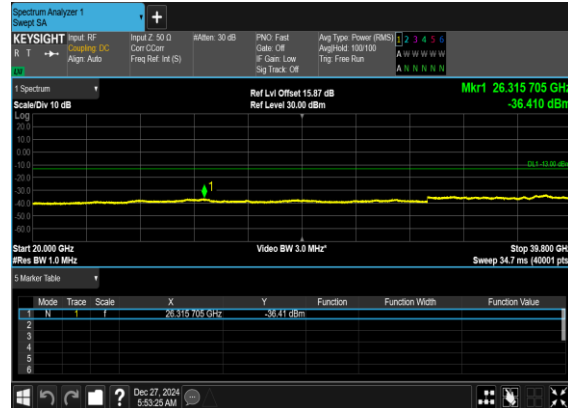





N77(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

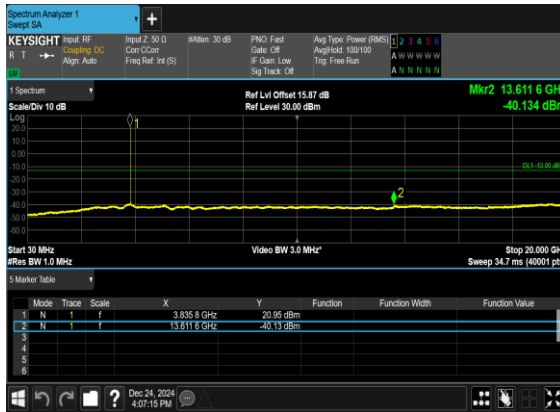


N77(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

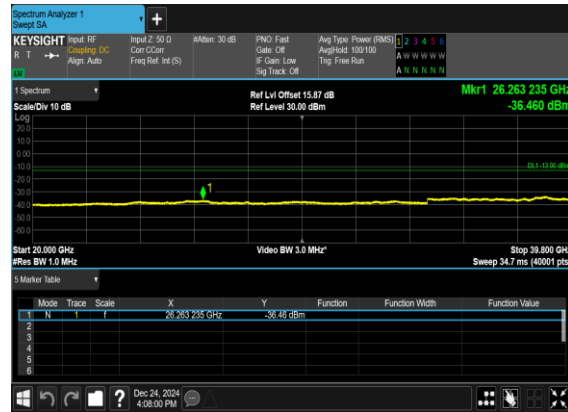

N77(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

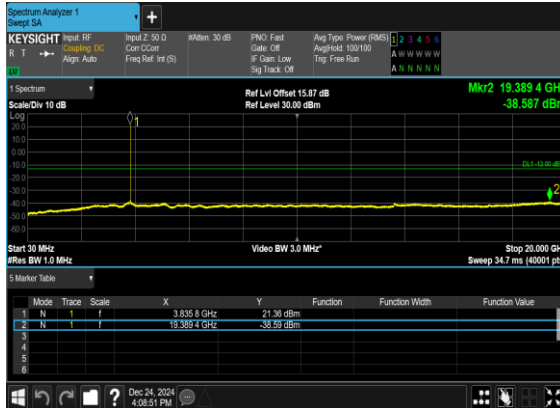


N77(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

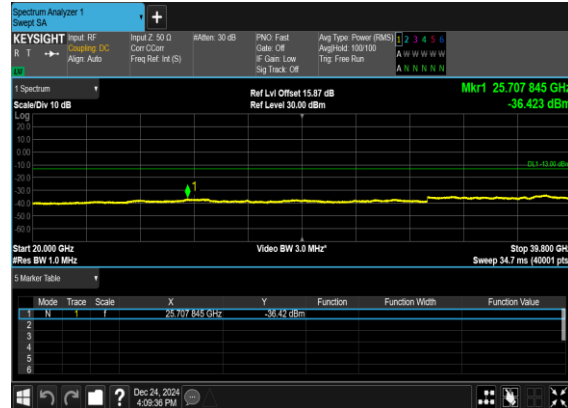





N77(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

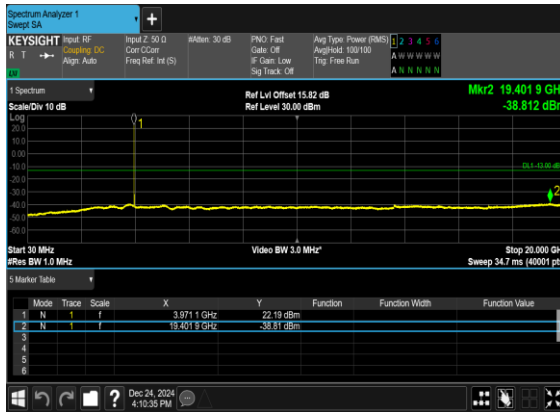


N77(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

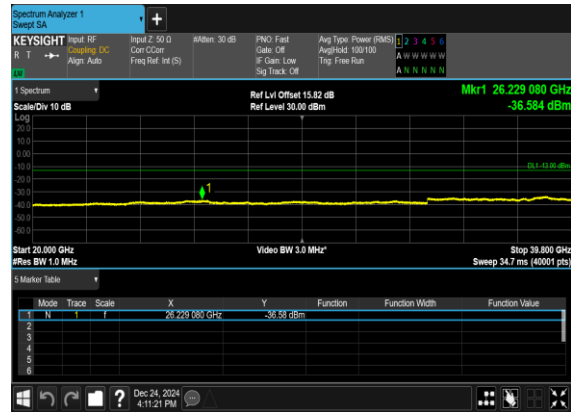

N77(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

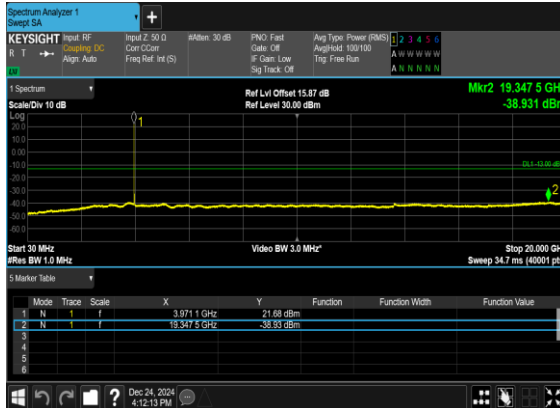


N77(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

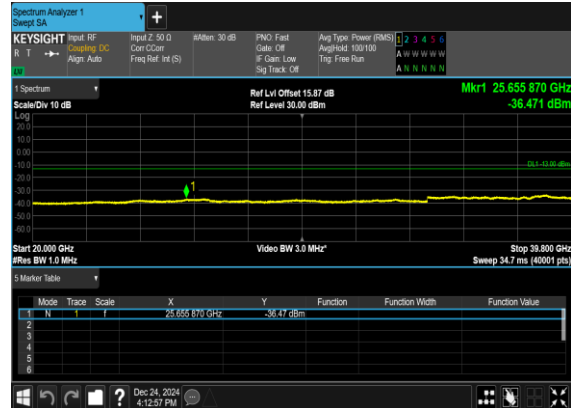





N77(50M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

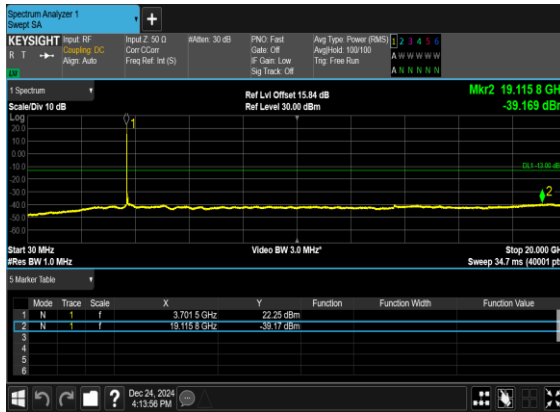


N77(50M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

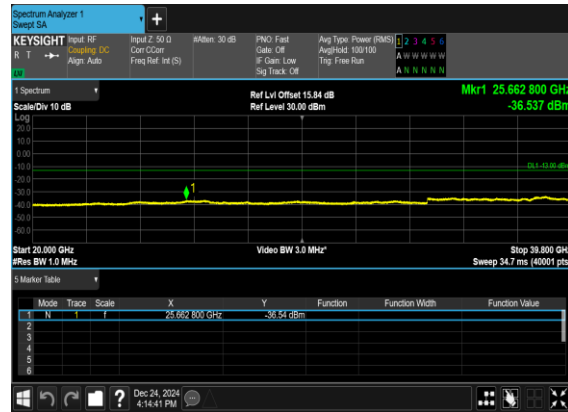

N77(50M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

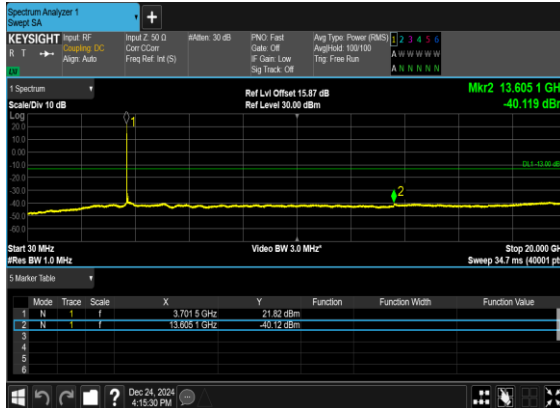


N77(50M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

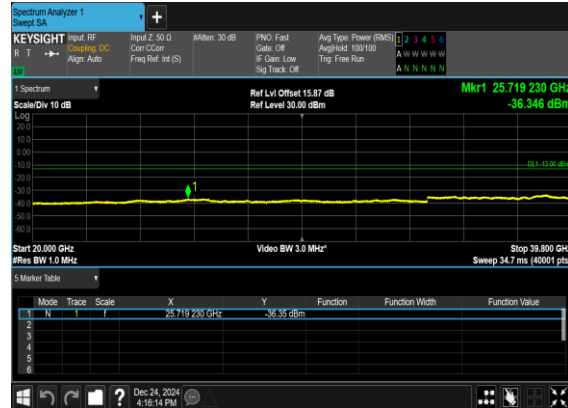





N77(50M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

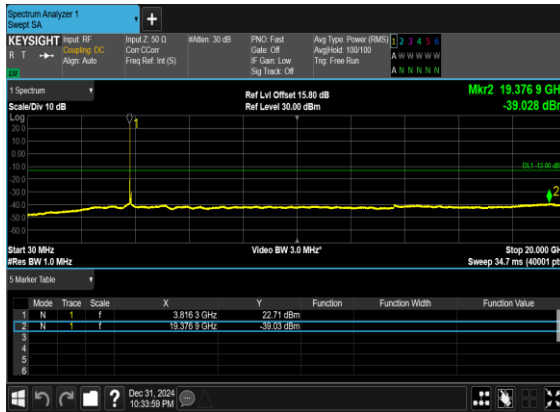


N77(50M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

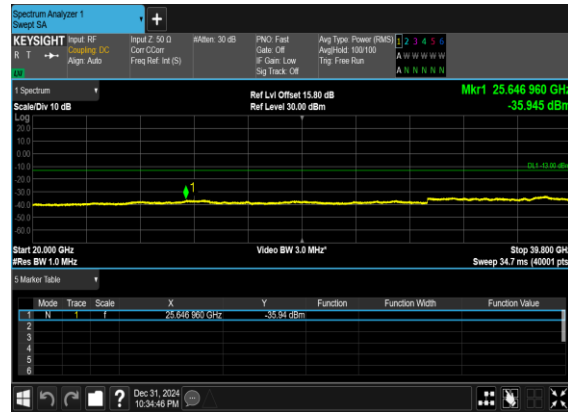

N77(50M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

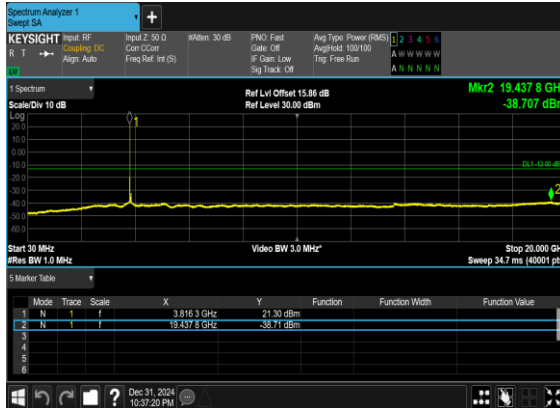


N77(50M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

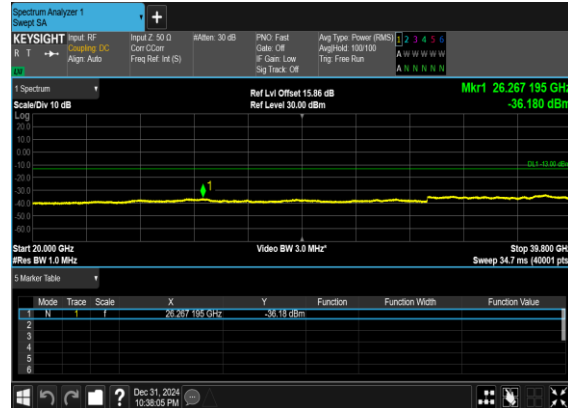





N77(50M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

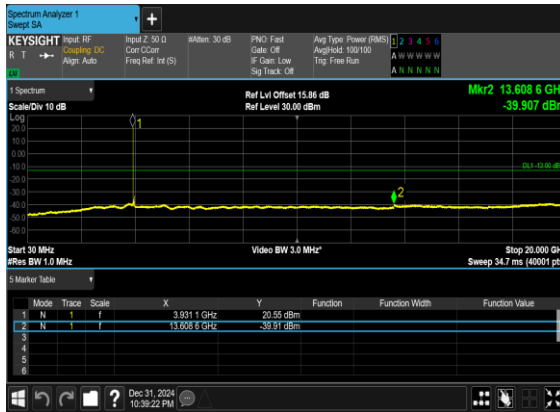


N77(50M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

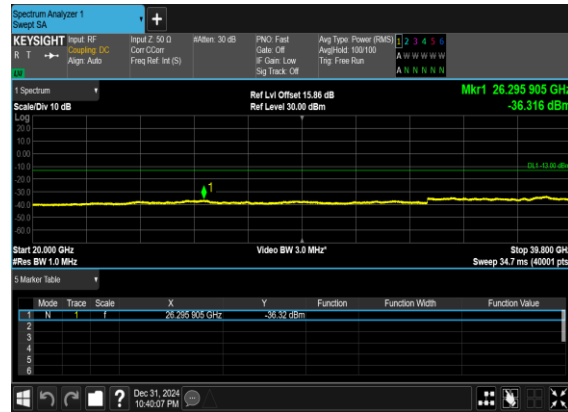

N77(50M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

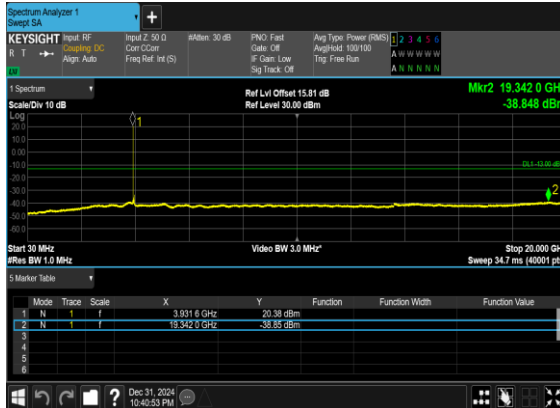


N77(50M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

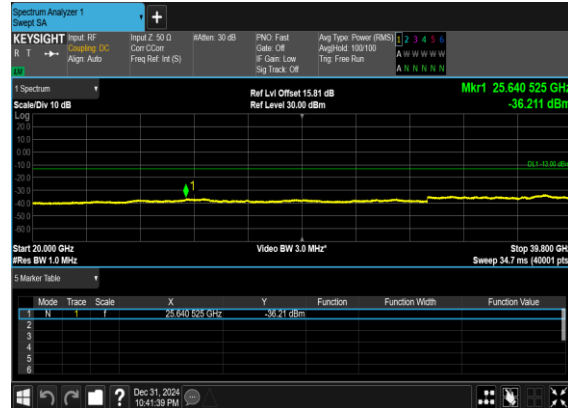





N77(100M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

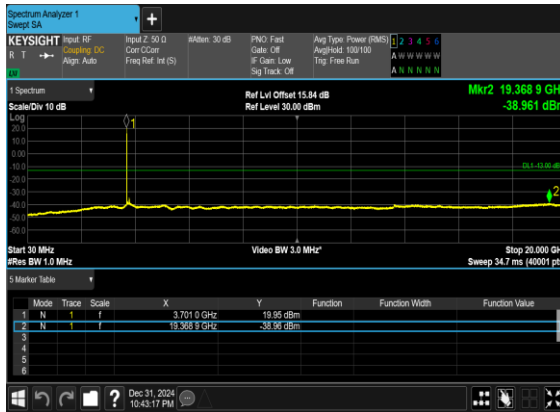


N77(100M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

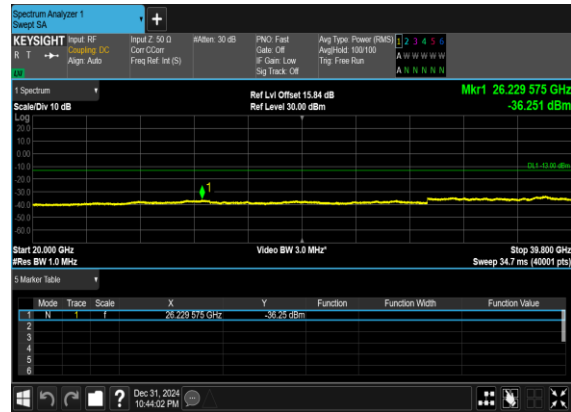

N77(100M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

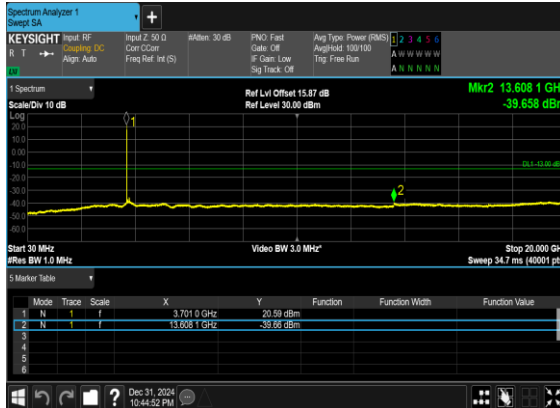


N77(100M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

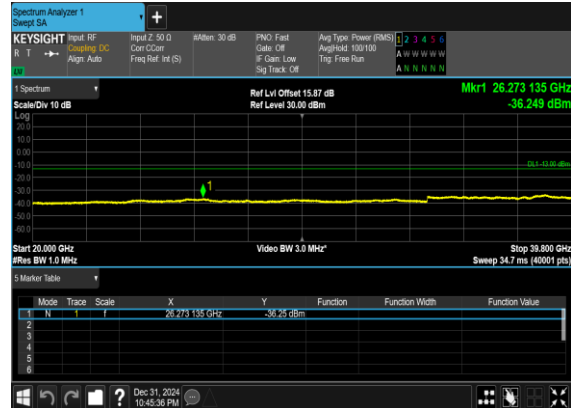





N77(100M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

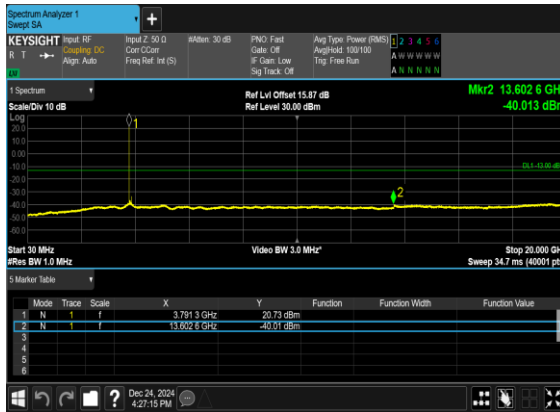


N77(100M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

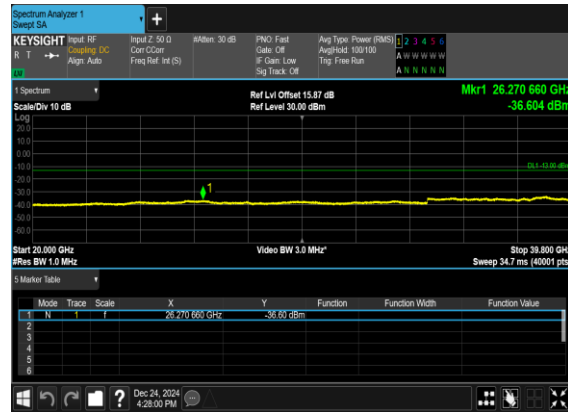

N77(100M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

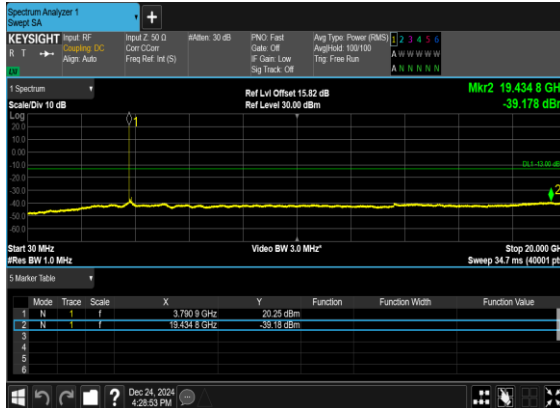


N77(100M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

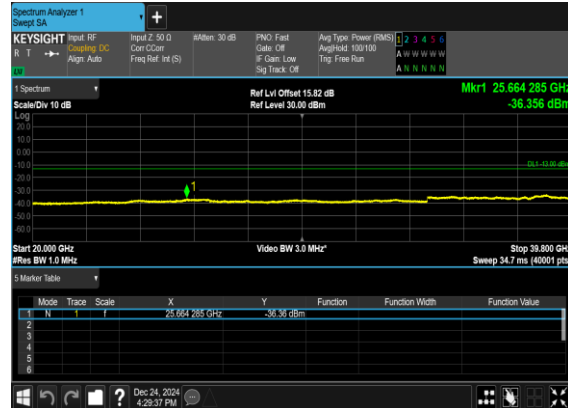





N77(100M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

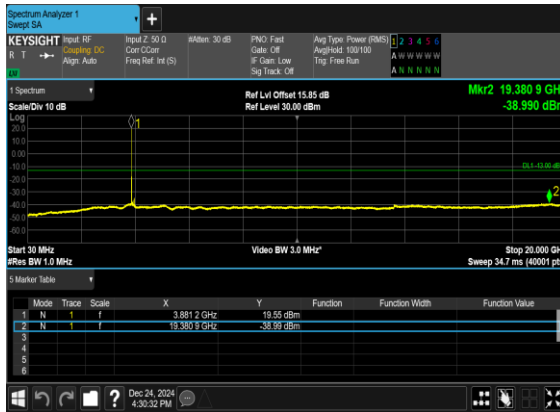


N77(100M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

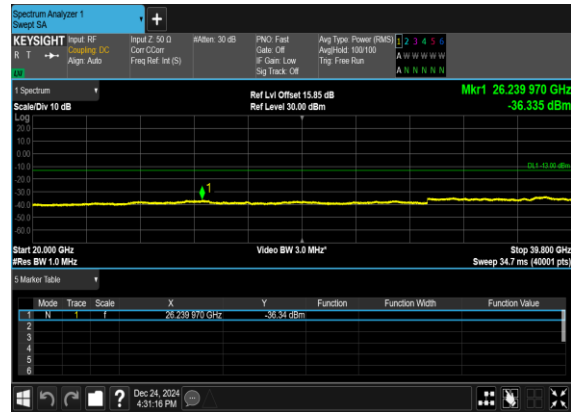

N77(100M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

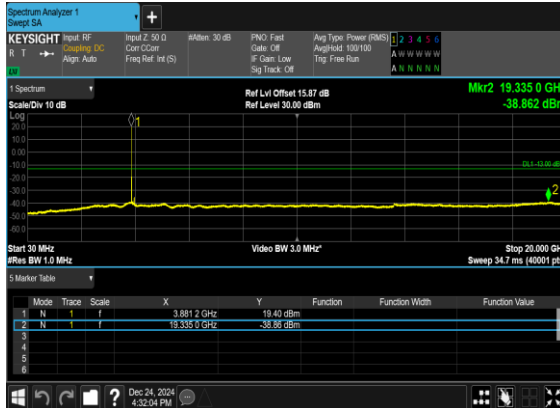

N77(100M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

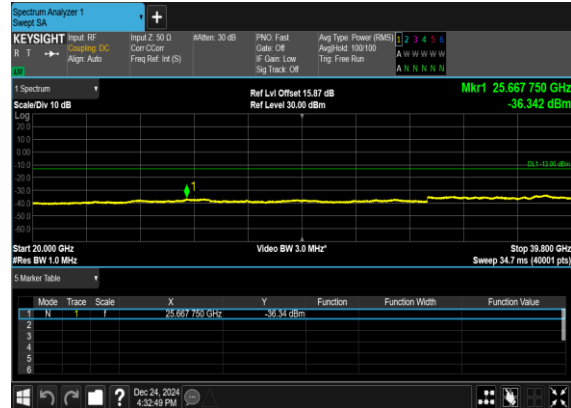

**Conducted Band Edge**

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
77	30	10	647000	3705.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	10	647000	3705.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	10	647000	3705.0	DFT-s-OFDM BPSK	24@0	see graph	PASS
77	30	10	647000	3705.0	DFT-s-OFDM QPSK	24@0	see graph	PASS
77	30	10	665000	3975.0	DFT-s-OFDM BPSK	1@23	see graph	PASS
77	30	10	665000	3975.0	DFT-s-OFDM QPSK	1@23	see graph	PASS
77	30	10	665000	3975.0	DFT-s-OFDM BPSK	24@0	see graph	PASS
77	30	10	665000	3975.0	DFT-s-OFDM QPSK	24@0	see graph	PASS
77	30	50	648334	3725.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	50	648334	3725.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	50	648334	3725.01	DFT-s-OFDM BPSK	128@0	see graph	PASS
77	30	50	648334	3725.01	DFT-s-OFDM QPSK	128@0	see graph	PASS
77	30	50	663666	3954.99	DFT-s-OFDM BPSK	1@132	see graph	PASS
77	30	50	663666	3954.99	DFT-s-OFDM QPSK	1@132	see graph	PASS
77	30	50	663666	3954.99	DFT-s-OFDM BPSK	128@0	see graph	PASS
77	30	50	663666	3954.99	DFT-s-OFDM QPSK	128@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM BPSK	270@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM QPSK	270@0	see graph	PASS



77	30	100	662000	3930.0	DFT-s-OFDM BPSK	1@272	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM QPSK	1@272	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM BPSK	270@0	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM QPSK	270@0	see graph	PASS