



Spot Check Evaluation

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2503-4, XT2505-1
FCC ID : IHDT56AU8
STANDARD : 47 CFR Part 2, 22, 24, 27, 90S
47 CFR Part 15 Subpart C §15.225
47 CFR Part 15 Subpart C §15.247
47 CFR Part 15 Subpart E §15.407
TEST DATE(S) : Jan. 03, 2025 ~ Jan. 23, 2025

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (KunShan)

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
1 GENERAL DESCRIPTION.....	4
1.1 Applicant.....	4
1.2 Manufacturer.....	4
1.3 Product Feature of Equipment Under Test.....	4
1.4 Modification of EUT	4
1.5 Testing Site.....	5
1.6 Test Software.....	5
1.7 Applicable Standards.....	6
1.8 Specification of Accessory.....	6
2 RE-USE OF MEASURED DATA.....	7
2.1 Introduction Section.....	7
2.2 Model Difference Information	7
2.3 Reference detail Section:	8
2.4 Spot Check Verification Data Section.....	9
3 LIST OF MEASURING EQUIPMENT.....	13
4 MEASUREMENT UNCERTAINTY	15
APPENDIX A. RADIATED SPURIOUS EMISSION	
APPENDIX B. SETUP PHOTOGRAPHS	
APPENDIX C. REFERENCE REPORT	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG4D1311-01K	Rev. 01	Initial issue of report	Feb. 10, 2025

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2503-4, XT2505-1
FCC ID	IHDT56AU8
IMEI Code	Conducted/DFS: 357706750005150/357706750005168 Radiation: 357706750006133/357706750006141 Conduction: 357706750006158/357706750006166
HW Version	DVT2
SW Version	V2VC35.13
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Modification of EUT

No modifications are made to the EUT during all test items.



1.5 Testing Site

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ DFS01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH01-SZ	CN1256	421272

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH02-KS 03CH08-KS	CN1257	314309

1.6 Test Software

Item	Site	Manufacturer	Name	Version
1.	CO01-KS	AUDIX	E3	6.2009-8-24
2.	03CH02-KS	AUDIX	E3	6.2009-8-24a1
3.	03CH08-KS	AUDIX	E3	210616
4.	03CH01-SZ	AUDIX	E3	6.2009-8-24
5.	DFS01-SZ	Sporton	Test Tools	1.0

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC KDB 484596 D01 Referencing Test Data v02r03
- 47 CFR Part 2, 22, 24, 27, 90S
- 47 CFR Part 15 Subpart C §15.225
- 47 CFR Part 15 Subpart C §15.247
- 47 CFR Part 15 Subpart E §15.407
- ANSI C63.10-2013
- ANSI C63.26-2015

1.8 Specification of Accessory

Accessories Information				
AC Adapter 1(US)	Brand Name	Motorola(Chenyang)	Model Name	MC-681N
AC Adapter 1(EU)	Brand Name	Motorola(Chenyang)	Model Name	MC-682N
AC Adapter 1(UK)	Brand Name	Motorola(Chenyang)	Model Name	MC-683N
AC Adapter 1(AU)	Brand Name	Motorola(Chenyang)	Model Name	MC-685N
AC Adapter 1(AR)	Brand Name	Motorola(Chenyang)	Model Name	MC-686N
AC Adapter 1(BR)	Brand Name	Motorola(Chenyang)	Model Name	MC-687N
AC Adapter 1(CHILE)	Brand Name	Motorola(Chenyang)	Model Name	MC-689N
AC Adapter 2(US)	Brand Name	Motorola(Acbel)	Model Name	MC-681N
AC Adapter 2(EU)	Brand Name	Motorola(Acbel)	Model Name	MC-682N
AC Adapter 2(UK)	Brand Name	Motorola(Acbel)	Model Name	MC-683N
AC Adapter 2(AU)	Brand Name	Motorola(Acbel)	Model Name	MC-685N
AC Adapter 2(AR)	Brand Name	Motorola(Acbel)	Model Name	MC-686N
AC Adapter 2(BR)	Brand Name	Motorola(Acbel)	Model Name	MC-687N
AC Adapter 2(CHILE)	Brand Name	Motorola(Acbel)	Model Name	MC-689N
Battery 1	Brand Name	Motorola(ATL)	Model Name	RM52
Battery 2	Brand Name	Motorola(Cosmx)	Model Name	RM52
Earphone	Brand Name	Motorola(Lyand)	Model Name	MI181C
USB Cable 1	Brand Name	Motorola(saibao)	Model Name	SC18D71644
USB Cable 2	Brand Name	Motorola(Luxshare)	Model Name	SC18E08104
USB Cable 3	Brand Name	Motorola(saibao)	Model Name	SC18D86731
USB Cable 4	Brand Name	Motorola(Luxshare)	Model Name	SC18E08103



2 Re-use of Measured Data

2.1 Introduction Section

This application re-uses data collected on a similar device. The subject device of this application (Model: XT2503-4, XT2505-1, FCC ID: IHDT56AU8) is electrically identical to the reference device (Model: XT2503-1, XT2505-3, FCC ID: IHDT56AU7) for the portions of the circuitry corresponding to the data being re-used, following the FCC KDB 484596 D01 Referencing Test Data v02r03.

ECR Data Referencing Inquiry has been approved by FCC, and the data referencing and spot check test plan includes RF/EMC, the details are presented in section 2.3 of this report, and for SAR Reference detail, please refer to FCC SAR report FA4D1311-01.

The criteria set in section 3 of KDB 484596 D01 v02r03 is followed to determine whether the data referencing is justified. For SAR, the higher between the referenced value and the spot check value is used to determine compliance in both standalone and simultaneous transmission conditions

The applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID: IHDT56AU8 .

2.2 Model Difference Information

The **main** difference between FCC ID: IHDT56AU7 and FCC ID: IHDT56AU8 is as below:

- Remove WCDMA B4, LTE B4/12/13/17/66 and 5G NR n2/n66.
- Add LTE B18/19/20/32/43/71, 5G NR n20/n71/n75.
- Add n5 NSA mode and n41 SA mode.
- LTE B41, 5G NR n77/N78 upgraded to PC2 via software.

Other differences and all the details of similarity and difference can be found in the confidential documents (IHDT56AU8 Operational Description of Product Equality Declaration).



2.3 Reference detail Section:

Rule Part	Equipment Class	Frequency Band (MHz)	Reference FCC ID (Parent)	Reference on test	Reference Title	FCC ID Filling (Variant)	Test on the variant	Data Referencing (Y/N)
15C	DSS (BR/EDR)	2400~2483.5	IHDT56AU7	Full test	FR4D1311A	IHDT56AU8	Spot check	Y, All test items
	DTS (BLE)	2400~2483.5	IHDT56AU7	Full test	FR4D1311B	IHDT56AU8	Spot check	Y, All test items
	DTS (WLAN)	2400~2483.5	IHDT56AU7	Full test	FR4D1311C	IHDT56AU8	Spot check	Y, All test items
	DXX (NFC)	13.56	IHDT56AU7	Full test	FR4D1311D	IHDT56AU8	Spot check	Y, All test items
15E	U-NII	5180~5240	IHDT56AU7	Full test	FR4D1311E	IHDT56AU8	Spot check	Y, All test items
		5260~5320	IHDT56AU7	Full test	FR4D1311E	IHDT56AU8	Spot check	Y, All test items
		5500~5720	IHDT56AU7	Full test	FR4D1311E	IHDT56AU8	Spot check	Y, All test items
		5745~5825	IHDT56AU7	Full test	FR4D1311E	IHDT56AU8	Spot check	Y, All test items
		5260~5320 5500~5720	IHDT56AU7	Full test	FZ4D1311	IHDT56AU8	Spot check	Y, All test items
22, 24, 27, 90,	PCE (GSM)	GSM 850/1900	IHDT56AU7	Full test	FG4D1311A	IHDT56AU8	Spot check	Y, All test items
	PCE (WCDMA)	Band II, V	IHDT56AU7	Full test	FG4D1311A	IHDT56AU8	Spot check	Y, All test items
	PCE (LTE)	B2/5/7/26/38/42/ 7C/38C/42C	IHDT56AU7	Full test	FG4D1311B FG4D1311C FG4D1311E FG4D1311F	IHDT56AU8	Spot check	Y, All test items
	PCE (LTE)	B26 (90S)	IHDT56AU7	Full test	FG4D1311D	IHDT56AU8	Spot check	Y, All test items
	PCE (NR)	n5/n7/n26/n38/n41	IHDT56AU7	Full test	FG4D1311G FG4D1311H	IHDT56AU8	Spot check	Y, All test items except for n5 NSA RSE, n41 RSE
	PCE (NR)	n26 (90S)	IHDT56AU7	Full test	FG4D1311I	IHDT56AU8	Spot check	Y, All test items

Y: Pointer to spot-check exhibit; N: Pointer to full test exhibit

2.4 Spot Check Verification Data Section

All test items test against the variant model based on the worst-case condition from the original model was performed in this filing to demonstrate the test data from original model remains representative for the variant model.

All test procedures follow the related section of parent report.

Spot-check measurements, while being always compliant with the applicable rule part(s) for the test under consideration, show a deviation d_{dB} from the reference data no larger than 3 dB:

$$d_{dB} = |V_{dB} - R_{dB}| \leq 3 \text{ dB} \quad (1)$$

V_{dB} , the variant spot-check level

R_{dB} , the corresponding measurement level for the reference model

An alternative to the limit of eq. (1) is available, and is based on considering how far the reference data R_{dB} is from the compliance threshold C_{dB} (also expressed in dB), for the particular test under consideration. In this case, if $M_{dB} = |C_{dB} - R_{dB}|$ is the margin in dB from the compliance limit, a spot check may be considered acceptable when the deviation d_{dB} from the reference data satisfies the following condition:

$$d_{dB} = |V_{dB} - R_{dB}| \leq (3 + M_{dB} / 20) \text{ dB} , \text{ for } 0 \leq M_{dB} \leq 60 \text{ dB} \quad (2)$$

$$d_{dB} = |V_{dB} - R_{dB}| = 6 \text{ dB} , \text{ for } M_{dB} > 60 \text{ dB}$$

where “| |” is the absolute value of the measured quantity.

When using the option in eq. (2), d_{dB} increases linearly from 3 dB to 6 dB.



Summary for spot check for each rule entry and technology is listed as below:

Mode	Test Item	IHDT56AU7 Parent Worst mode Test Result	IHDT56AU8 Variant Check Test Result	Deviation	Deviation Limit
BT 1Mbps (CH39)	Number of Channels	79	79	0	3
	Hopping Channel Separation	1	1.003	0.003 MHz	3
	Dwell Time of Each Channel	0.306	0.307	0.001 s	3
	20dB Bandwidth	0.87	0.865	0.005 MHz	3
	99% Bandwidth	0.758	0.757	0.01 MHz	3
	Conducted Band Edges	-43.67	-45.85	2.18 dBm	3
	Conducted Spurious Emission	-36.12	-38.30	2.18 dBm	3
BT 1Mbps (CH78)	Radiated Band Edges and Radiated Spurious Emission	-18.78	-18	0.78 dB	3
BT	AC Conducted Emission	-13.67	-11.94	1.73 dB	3
BLE 2Mbps (CH01)	6dB Bandwidth	1.16	1.17	0.01 MHz	3
	99% Bandwidth	2.056	2.050	0.006 MHz	3
	Power Spectral Density	-4.23	-4.94	0.71 dBm/3kHz	3
	Conducted Band Edges	-52.99	-53.56	0.57 dBm/100kHz	3
	Conducted Spurious Emission	-35.36	-37.17	1.81 dBm/100kHz	3
BLE 1Mbps (CH19)	Radiated Band Edges and Spurious Emission	-3.41	-3.13	0.28 dB	3
BLE	AC Conducted Emission	-13.67	-11.94	1.73 dB	3
WIFI 2.4G (802.11ax HE20 CH06)	6dB Bandwidth	18.48	18.70	0.22 MHz	3
	99% Bandwidth	19.874	20.280	0.406 MHz	3
	Power Spectral Density	-6.15	-7.19	1.04 dBm/3kHz	3
	Conducted Band Edges	-14.78	-15.00	0.22 dBm/100kHz	3
	Conducted Spurious Emission	-35.5	-38.06	-2.56 dBm/100kHz	3
WIFI 2.4G (802.11ax HE40 CH06)	Radiated Band Edges and Spurious Emission	-3.11	-3.38	0.27 dB	3
WIFI 2.4G	AC Conducted Emission	-13.67	-11.94	1.73 dB	3
WIFI 5G (802.11ax HE40 CH142)	26dB & 99% Bandwidth	75.60	75.24	0.36 MHz	3
	Power Spectral Density	3.62	3.14	0.48 dBm/MHz	3
WIFI 5G (802.11ax HE80 CH58)	DFS	0.951632	0.88803	0.63602 s	3
WIFI 5G (802.11ax HE20 CH36)	Radiated Band Edges and Spurious Emission	-3.07	-3.23	0.16 dB	3
WIFI 5G	AC Conducted Emission	-17.62	-15.89	1.73 dB	3
NFC	20dB Spectrum Bandwidth	2.58	2.57	0.01 kHz	3
	99% Occupied Bandwidth	2.19	2.19	0 kHz	3
	Field Strength of Fundamental Emissions@3m	52.46	52.54	0.08 dBuV/m	3
	Radiated Spurious Emissions	47.17	49.99	0.82 dBuV/m	3
	AC Power Line Conducted Emissions	-14.93	-13.10	1.83 dB	3
Part 22H (GSM 850)	Peak-to-Average Ratio	0.17	0.14	0.03 dB	3
	Occupied Bandwidth	0.242	0.243	0.001 MHz	3
	Conducted Band Edge	-14.83	-14.60	0.23 dBm	3
	Conducted Spurious Emission	-31.6	-30.52	1.08 dBm	3
	Frequency Stability	0.0023	0.0024	0.0001 ppm	3
	26dB Bandwidth	0.32	0.31	0.01 MHz	3
Part 27M (LTE Band 7)	Radiated Spurious Emission	-49.04	-51.39	2.35 dB	3



Test Item	Mode	IHDT56AU7 Parent Worst mode Test Result	IHDT56AU8 Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
Conducted Power (dBm)	BT BR/EDR	17.40	17.30	0.10	3
	BLE 1Mbps/2Mbps	12.66	11.40	1.26	3
	11b, 2.4GHz	21.28	20.82	0.46	3
	11g, 2.4GHz	23.72	23.55	0.17	3
	11n HT20, 2.4GHz	23.68	23.53	0.15	3
	11n HT40, 2.4GHz	22.95	22.48	0.47	3
	11ax HE20, 2.4GHz	23.77	23.49	0.28	3
	11ax HE40, 2.4GHz	23.03	22.5	0.53	3
	11a, 5GHz	18.78	18.67	0.11	3
	11n HT20, 5GHz	18.69	18.67	0.02	3
	11n HT40, 5GHz	18.79	18.70	0.09	3
	11ac VHT20, 5GHz	18.75	18.74	0.01	3
	11ac VHT40, 5GHz	18.83	18.70	0.13	3
	11ac VHT80, 5GHz	17.98	17.95	0.03	3
	11ax HE20, 5GHz	18.83	18.78	0.05	3
	11ax HE40, 5GHz	18.95	18.82	0.13	3
	11ax HE80, 5GHz	18.07	18.06	0.01	3
	GSM 850	31.75	31.34	0.41	3
	GSM 1900	28.86	26.57	2.29	3
	WCDMA II	22.68	20.42	2.26	3
	WCDMA V	22.81	22.39	0.42	3
	LTE B2	22.51	22.27	0.24	3
	LTE B5	22.49	22.39	0.10	3
	LTE B7	23.67	22.36	1.31	3
	LTE B7C	22.52	22.39	0.13	3
	LTE B26L	22.47	22.13	0.34	3
	LTE B26H	22.52	22.28	0.24	3
	LTE B38	23.58	23.28	0.30	3
	LTE B38C	22.39	22.53	0.14	3
	LTE B42	22.49	22.23	0.26	3
	LTE B42C	22.38	22.18	0.20	3
	5GNR n5	23.17	22.95	0.22	3
	5GNR n7	23.57	22.84	0.73	3
	5GNR n38	23.10	23.01	0.29	3
	5GNR n41	23.62	23.26	0.36	3
	5GNR n26L	23.66	22.87	0.79	3
	5GNR n26H	23.45	23.19	0.26	3

**Conclusion:**

All test items test against the variant model based on the worst-case condition from the original model was performed in this filing to demonstrate the test data from original model remains representative for the variant model.

Based on the spot check test result, the test data from the original model is representative for the variant model. All spot check test data are shown within expected level compliant to limit line.

We are using power and ERP/EIRP measurements from the original parent model reports to list on the grant.

The same detection mechanism/software/antenna gain is used in the variant of DFS. Hence, all test cases refer to parent report.

We confirm that the test data referencing policy of FCC KDB 484596 D01 Referencing Test Data v02r03 has been followed and the test data as referenced from the parent model report represents compliance with new FCC ID.



3 List of Measuring Equipment

For BT/WIFI:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 09, 2024	Jan. 22, 2025	Apr. 08, 2025	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 25, 2024	Jan. 22, 2025	Dec. 24, 2025	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Oct.14, 2024	Jan. 22, 2025	Oct. 13, 2025	Conducted (TH01-SZ)
EMI Test Receiver	Keysight	N9038A	MY57290151	3Hz~8.5GHz;Max 30dBm	Jul. 04, 2024	Jan. 20, 2025	Jul. 03, 2025	Radiation (03CH08-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57441079	10Hz~44GHz	Oct. 09, 2024	Jan. 20, 2025	Oct. 08, 2025	Radiation (03CH08-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	Jan. 20, 2025	Sep. 07, 2025	Radiation (03CH08-KS)
Bilog Antenna	TESEQ	CBL 6111D	59915	30MHz~1GHz	Aug. 18, 2024	Jan. 20, 2025	Aug.17, 2025	Radiation (03CH08-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00240138	1GHz~18GHz	Jul. 06, 2024	Jan. 20, 2025	Jul. 05, 2025	Radiation (03CH08-KS)
high gain Amplifier	EM	EM01G18GA	060890	1Ghz~18Ghz	Jul. 23, 2024	Jan. 20, 2025	Jul. 22, 2025	Radiation (03CH08-KS)
SHF-EHF Horn	Com-power	AH-840	101116	18GHz~40GHz	Oct. 22, 2024	Jan. 20, 2025	Oct. 21, 2025	Radiation (03CH08-KS)
Amplifier	SONOMA	310N	380826	9KHz~1GHz	Jul. 03, 2024	Jan. 20, 2025	Jul. 02, 2025	Radiation (03CH08-KS)
Amplifier	Keysight	83017A	MY53270417	500MHz~26.5GHz	Oct. 09, 2024	Jan. 20, 2025	Oct. 08, 2025	Radiation (03CH08-KS)
Amplifier	EM	EM18G40GGA	060737	18~40GHz	Jan. 03, 2025	Jan. 20, 2025	Jan. 02, 2026	Radiation (03CH08-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Jan. 20, 2025	NCR	Radiation (03CH08-KS)
Turn Table	EM	EM 1000-T	N/A	0~360 degree	NCR	Jan. 20, 2025	NCR	Radiation (03CH08-KS)
Antenna Mast	EM	EM 1000-A	N/A	1 m~4 m	NCR	Jan. 20, 2025	NCR	Radiation (03CH08-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 18, 2024	Jan. 20, 2025	Apr. 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Aug. 20, 2024	Jan. 20, 2025	Aug. 19, 2025	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Jan. 20, 2025	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 09, 2024	Jan. 20, 2025	Oct. 08, 2025	Conduction (CO01-KS)
Signal Analyzer	R&S	FSV7	101473	10Hz~7GHz	Dec. 25, 2024	Jan. 08, 2025	Dec. 24, 2025	DFS (DFS01-SZ)
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY56200424	9kHz~6GHz	Apr. 09, 2024	Jan. 08, 2025	Apr. 08, 2025	DFS (DFS01-SZ)
Combiner	TOJOIN	PS-2AM-0460	SZE14011007	0.4~6GHz	Sep. 05, 2024	Jan. 08, 2025	Sep. 04, 2025	DFS (DFS01-SZ)

NCR: No Calibration Required.



For NFC:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 09, 2024	Jan. 23, 2025	Apr. 08, 2025	Conducted (TH01-SZ)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 04, 2024	Jan. 23, 2025	Jul. 03, 2025	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max 30dBm	Oct. 11, 2024	Jan. 03, 2025	Oct. 10, 2025	Radiation (03CH02-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	Jan. 03, 2025	Sep. 07, 2025	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6111D	59915	30MHz~1GHz	Aug. 18, 2024	Jan. 03, 2025	Aug. 17, 2025	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Jan. 03, 2025	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Jan. 03, 2025	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Jan. 03, 2025	NCR	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	413740	9KHz~1GHz	Jan. 02, 2025	Jan. 03, 2025	Jan. 01, 2026	Radiation (03CH02-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 18, 2024	Jan. 20, 2025	Apr. 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Aug. 20, 2024	Jan. 20, 2025	Aug. 19, 2025	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Jan. 20, 2025	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 09, 2024	Jan. 20, 2025	Oct. 08, 2025	Conduction (CO01-KS)

For WWAN Bands:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 09, 2024	Jan. 08, 2025	Apr. 08, 2025	Conducted (TH01-SZ)
DC Power Supply	TTI	PL330P	290070	Max 32V , 3A	Oct.14, 2024	Jan. 08, 2025	Oct. 13, 2025	Conducted (TH01-SZ)
Power Divider	Titan	P02N005180	923402	0.4GHz~26.5GHz	Nov. 08, 2024	Jan. 08, 2025	Nov. 07, 2025	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Jul. 03, 2024	Jan. 08, 2025	Jul. 02, 2025	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec. 25, 2024	Jan. 18, 2025	Dec. 24, 2025	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 28, 2024	Jan. 18, 2025	Dec. 27, 2025	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Oct. 24, 2023	Jan. 18, 2025	Oct. 23, 2025	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 04, 2024	Jan. 18, 2025	Jul. 03, 2025	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 09, 2024	Jan. 18, 2025	Apr. 08, 2025	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 09, 2024	Jan. 18, 2025	Apr. 08, 2025	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 14, 2024	Jan. 18, 2025	Oct. 13, 2025	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 03, 2024	Jan. 18, 2025	Jul. 02, 2025	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	Oct. 14, 2024	Jan. 18, 2025	Oct. 13, 2025	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Jan. 18, 2025	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Jan. 18, 2025	NCR	Radiation (03CH01-SZ)

NCR: No Calibration Required.

4 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement (BT/WIFI2.4G/5G)

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	± 1.34 dB
Occupied Channel Bandwidth	± 0.012 MHz
Conducted Power	± 1.34 dB
Conducted Power Spectral Density	± 1.32 dB
Frequency	± 1.3 Hz

Uncertainty of Conducted Measurement (NFC)

Test Item	Uncertainty
Occupied Channel Bandwidth	± 0.012 MHz
Frequency	± 1.3 Hz

Uncertainty of Conducted Measurement (DFS)

Test Item	Uncertainty
Conducted Generated signal Levels	± 1.23 dB
Conducted Time	0.38%

Uncertainty of Conducted Measurement (WWAN)

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	± 1.34 dB
Occupied Channel Bandwidth	± 0.012 MHz
Conducted Power	± 1.34 dB
Peak to Average Ratio	± 1.34 dB
Frequency Stability	± 1.3 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.84 dB
---	---------

03CH08-KS(BT/WIF):

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.30 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.04 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.26 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.40 dB
---	---------

03CH02-KS(NFC):

Uncertainty of Radiated Emission Measurement (9 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.30 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.04 dB
---	---------

**03CH01-SZ(WWAN):****Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)**

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.48 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.53 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.02 dB
---	---------

-THE END-



Appendix A. Radiated Spurious Emission

For Simultaneous transmission:

Test Engineer :	Zhaohui Liang	Relative Humidity :	50%
		Temperature :	20-22℃

Radiated Spurious Emission Test Modes





Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	2400-2483.5	3	Bluetooth-LE_GSKF	19	2440	1Mbps	-	-
	U-NII-1	5.15-5.25	4	802.11ax HE20	36	5180	MCS0	Full RU	-
	LTE Band 41C								

Note: For RSE testing of simultaneous transmission, pre-scanned harmonic among the new added WWAN bands, we only choose the worst band of LTE Band 41C(PC2) to test.

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth-LE_GSKF	19	2490.46	44.29	54.00	-9.71	H	AVERAGE	Pass	Band Edge
	Bluetooth-LE_GSKF	19	4880.00	50.74	54.00	-3.26	H	AVERAGE	Pass	Harmonic
1	802.11ax HE20	36	5149.65	50.39	54.00	-3.61	H	AVERAGE	Pass	Band Edge
	802.11ax HE20	36	10360.00	44.85	68.20	-23.35	H	PEAK	Pass	Harmonic

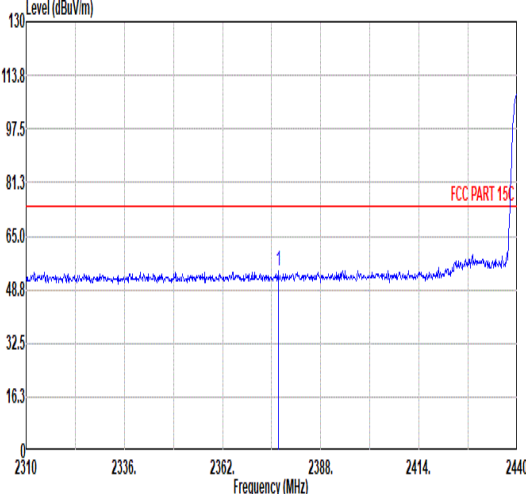
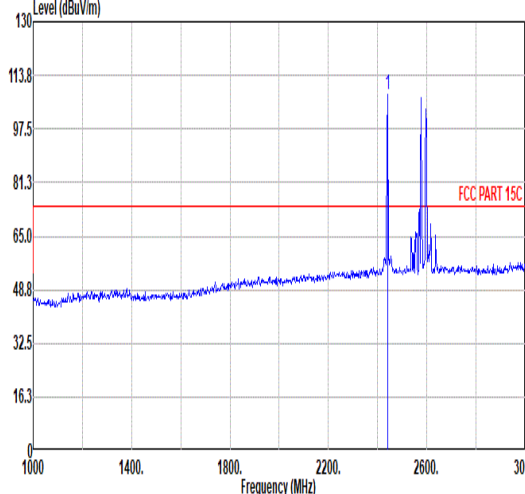
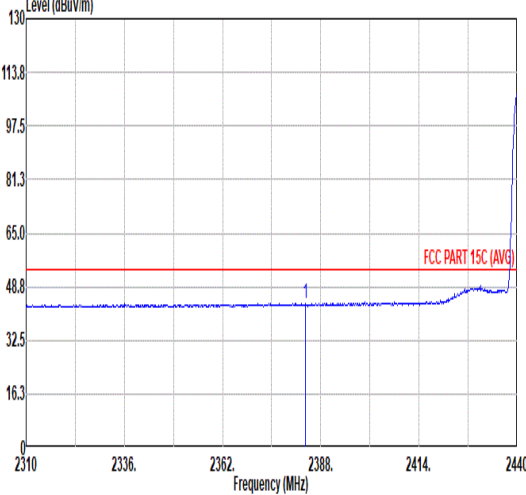
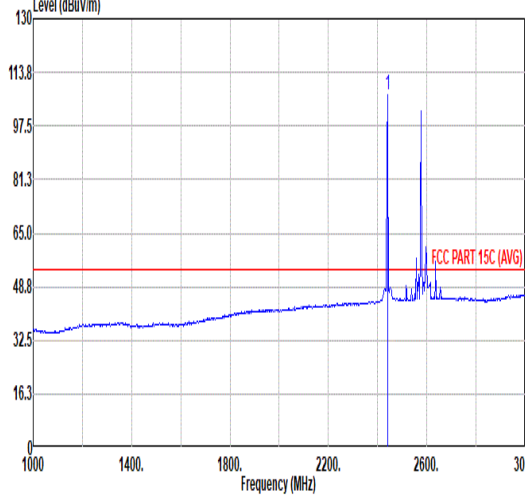


Mode	1																																																																																																		
	Band Edge - L																																																																																																		
	2400-2483.5_2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																																																																		
ANT	3																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2376.69</td><td>54.35</td><td>74.00</td><td>-19.65</td><td>38.95</td><td>32.06</td><td>8.03</td><td>30.69</td><td>6.00</td><td>300</td><td>349</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2376.69	54.35	74.00	-19.65	38.95	32.06	8.03	30.69	6.00	300	349	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>108.03</td><td>-----</td><td>-----</td><td>92.27</td><td>32.28</td><td>8.15</td><td>30.67</td><td>6.00</td><td>300</td><td>349</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	108.03	-----	-----	92.27	32.28	8.15	30.67	6.00	300	349
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2376.69	54.35	74.00	-19.65	38.95	32.06	8.03	30.69	6.00	300	349	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2440.00	108.03	-----	-----	92.27	32.28	8.15	30.67	6.00	300	349	PEAK																																																																																							
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2383.84</td><td>43.66</td><td>54.00</td><td>-10.34</td><td>28.21</td><td>32.10</td><td>8.04</td><td>30.69</td><td>6.00</td><td>300</td><td>349</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2383.84	43.66	54.00	-10.34	28.21	32.10	8.04	30.69	6.00	300	349	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>106.84</td><td>-----</td><td>-----</td><td>91.08</td><td>32.28</td><td>8.15</td><td>30.67</td><td>6.00</td><td>300</td><td>349</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	106.84	-----	-----	91.08	32.28	8.15	30.67	6.00	300	349
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2383.84	43.66	54.00	-10.34	28.21	32.10	8.04	30.69	6.00	300	349	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2440.00	106.84	-----	-----	91.08	32.28	8.15	30.67	6.00	300	349	AVERAGE																																																																																							



Mode	1																																																						
	Band Edge - R																																																						
	2400-2483.5_2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																						
ANT	3																																																						
Pol.	Horizontal										Fundamental																																												
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2495.44</td><td>54.75</td><td>74.00</td><td>-19.25</td><td>38.75</td><td>32.39</td><td>8.26</td><td>30.65</td><td>6.00</td><td>300</td><td>349</td><td>PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2495.44	54.75	74.00	-19.25	38.75	32.39	8.26	30.65	6.00	300	349	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2495.44	54.75	74.00	-19.25	38.75	32.39	8.26	30.65	6.00	300	349	PEAK																																											
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2490.46</td><td>44.29</td><td>54.00</td><td>-9.71</td><td>28.31</td><td>32.38</td><td>8.25</td><td>30.65</td><td>6.00</td><td>300</td><td>349</td><td>AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2490.46	44.29	54.00	-9.71	28.31	32.38	8.25	30.65	6.00	300	349	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2490.46	44.29	54.00	-9.71	28.31	32.38	8.25	30.65	6.00	300	349	AVERAGE																																											

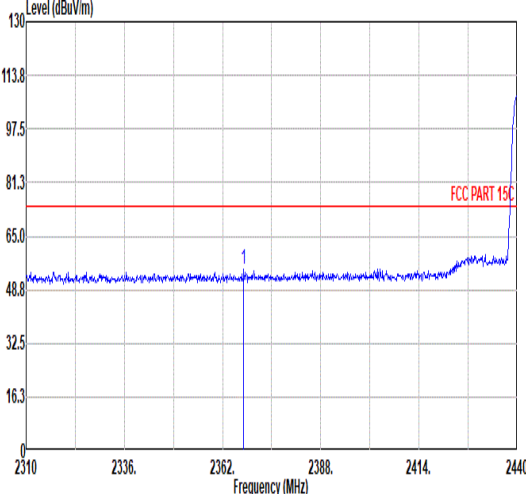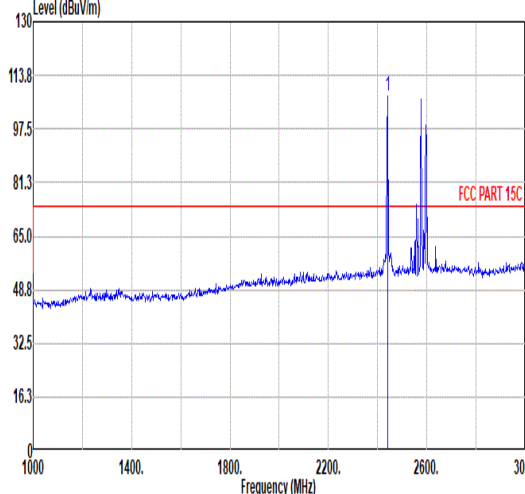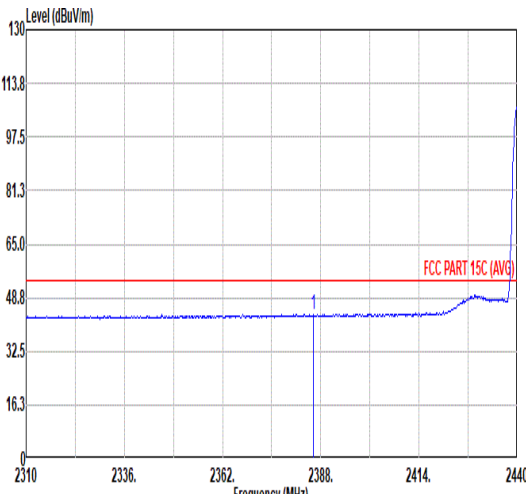
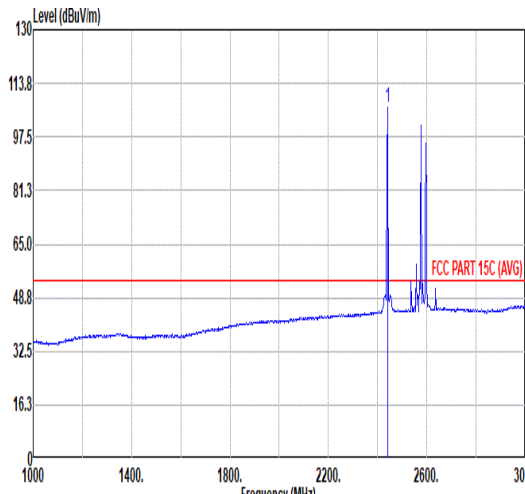


Mode	1																																																																																																		
	Band Edge - L																																																																																																		
	2400-2483.5_2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																																																																		
ANT	3																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2367.59</td><td>54.72</td><td>74.00</td><td>-19.28</td><td>39.39</td><td>32.01</td><td>8.02</td><td>30.70</td><td>6.00</td><td>397</td><td>45</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2367.59	54.72	74.00	-19.28	39.39	32.01	8.02	30.70	6.00	397	45	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>107.48</td><td>-----</td><td>-----</td><td>91.72</td><td>32.28</td><td>8.15</td><td>30.67</td><td>6.00</td><td>397</td><td>45</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	107.48	-----	-----	91.72	32.28	8.15	30.67	6.00	397	45
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2367.59	54.72	74.00	-19.28	39.39	32.01	8.02	30.70	6.00	397	45	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2440.00	107.48	-----	-----	91.72	32.28	8.15	30.67	6.00	397	45	PEAK																																																																																							
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2386.05</td><td>43.84</td><td>54.00</td><td>-10.16</td><td>28.36</td><td>32.12</td><td>8.05</td><td>30.69</td><td>6.00</td><td>397</td><td>45</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.05	43.84	54.00	-10.16	28.36	32.12	8.05	30.69	6.00	397	45	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>106.28</td><td>-----</td><td>-----</td><td>90.52</td><td>32.28</td><td>8.15</td><td>30.67</td><td>6.00</td><td>397</td><td>45</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	106.28	-----	-----	90.52	32.28	8.15	30.67	6.00	397	45
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2386.05	43.84	54.00	-10.16	28.36	32.12	8.05	30.69	6.00	397	45	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2440.00	106.28	-----	-----	90.52	32.28	8.15	30.67	6.00	397	45	AVERAGE																																																																																							







Mode	1																																																							
	Band Edge - R																																																							
	2400-2483.5_2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																							
ANT	3																																																							
Pol.	Vertical						Fundamental																																																	
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2493.16</td><td>55.44</td><td>74.00</td><td>-18.56</td><td>39.45</td><td>32.39</td><td>8.25</td><td>30.65</td><td>6.00</td><td>397</td><td>45</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2493.16	55.44	74.00	-18.56	39.45	32.39	8.25	30.65	6.00	397	45	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2493.16	55.44	74.00	-18.56	39.45	32.39	8.25	30.65	6.00	397	45	PEAK																																												
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2496.10</td><td>44.10</td><td>54.00</td><td>-9.90</td><td>28.10</td><td>32.39</td><td>8.26</td><td>30.65</td><td>6.00</td><td>397</td><td>45</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2496.10	44.10	54.00	-9.90	28.10	32.39	8.26	30.65	6.00	397	45	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2496.10	44.10	54.00	-9.90	28.10	32.39	8.26	30.65	6.00	397	45	AVERAGE																																												



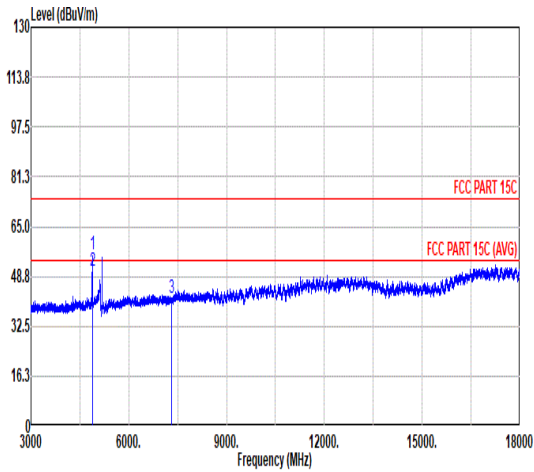
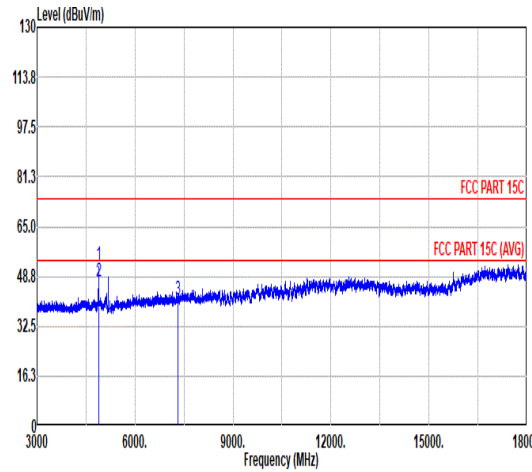


Mode	1																																																																																																																																																						
	Harmonic																																																																																																																																																						
	2400-2483.5_2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																																																																																																																						
ANT	3																																																																																																																																																						
Pol.	Horizontal						Vertical																																																																																																																																																
Peak Avg																																																																																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>56.06</td><td>74.00</td><td>-17.94</td><td>75.48</td><td>34.14</td><td>11.69</td><td>65.25</td><td>0.00</td><td>100</td><td>57</td><td>PEAK</td></tr><tr><td>2</td><td>4880.00</td><td>50.74</td><td>54.00</td><td>-3.26</td><td>70.16</td><td>34.14</td><td>11.69</td><td>65.25</td><td>0.00</td><td>100</td><td>57</td><td>AVERAGE</td></tr><tr><td>3</td><td>7320.00</td><td>41.79</td><td>74.00</td><td>-32.21</td><td>58.99</td><td>35.76</td><td>14.49</td><td>67.45</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	56.06	74.00	-17.94	75.48	34.14	11.69	65.25	0.00	100	57	PEAK	2	4880.00	50.74	54.00	-3.26	70.16	34.14	11.69	65.25	0.00	100	57	AVERAGE	3	7320.00	41.79	74.00	-32.21	58.99	35.76	14.49	67.45	0.00	--	--	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>52.43</td><td>74.00</td><td>-21.57</td><td>71.85</td><td>34.14</td><td>11.69</td><td>65.25</td><td>0.00</td><td>366</td><td>211</td><td>PEAK</td></tr><tr><td>2</td><td>4880.00</td><td>47.14</td><td>54.00</td><td>-6.86</td><td>66.56</td><td>34.14</td><td>11.69</td><td>65.25</td><td>0.00</td><td>366</td><td>211</td><td>AVERAGE</td></tr><tr><td>3</td><td>7320.00</td><td>41.30</td><td>74.00</td><td>-32.70</td><td>58.50</td><td>35.76</td><td>14.49</td><td>67.45</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	52.43	74.00	-21.57	71.85	34.14	11.69	65.25	0.00	366	211	PEAK	2	4880.00	47.14	54.00	-6.86	66.56	34.14	11.69	65.25	0.00	366	211	AVERAGE	3	7320.00	41.30	74.00	-32.70	58.50	35.76	14.49	67.45	0.00	--	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																													
1	4880.00	56.06	74.00	-17.94	75.48	34.14	11.69	65.25	0.00	100	57	PEAK																																																																																																																																											
2	4880.00	50.74	54.00	-3.26	70.16	34.14	11.69	65.25	0.00	100	57	AVERAGE																																																																																																																																											
3	7320.00	41.79	74.00	-32.21	58.99	35.76	14.49	67.45	0.00	--	--	PEAK																																																																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																													
1	4880.00	52.43	74.00	-21.57	71.85	34.14	11.69	65.25	0.00	366	211	PEAK																																																																																																																																											
2	4880.00	47.14	54.00	-6.86	66.56	34.14	11.69	65.25	0.00	366	211	AVERAGE																																																																																																																																											
3	7320.00	41.30	74.00	-32.70	58.50	35.76	14.49	67.45	0.00	--	--	PEAK																																																																																																																																											

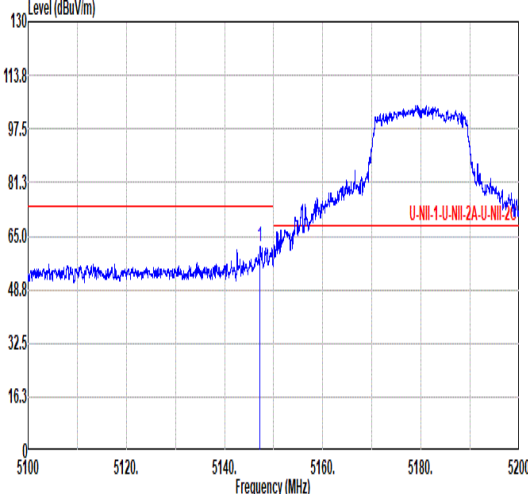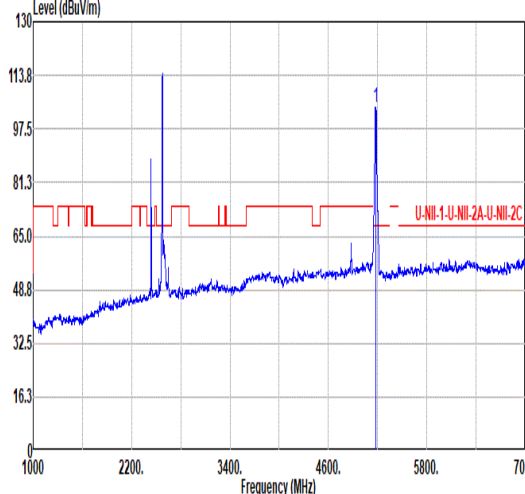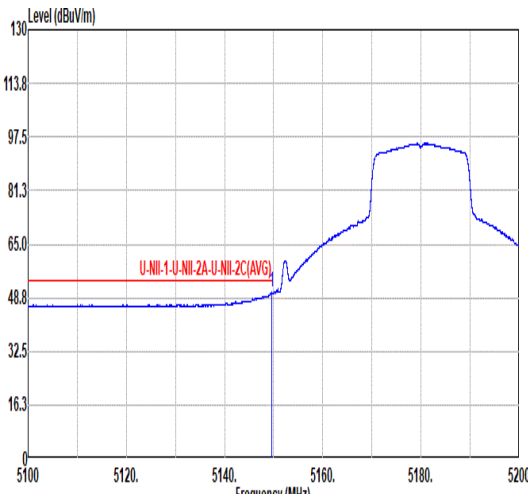
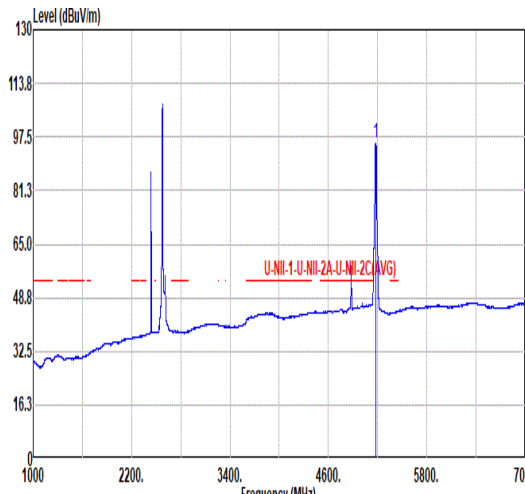


Mode	1																																																																																																		
	Band Edge																																																																																																		
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz																																																																																																		
ANT	4																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5147.25</td><td>62.01</td><td>74.00</td><td>-11.99</td><td>45.74</td><td>34.11</td><td>12.03</td><td>29.87</td><td>0.00</td><td>105</td><td>246</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5147.25	62.01	74.00	-11.99	45.74	34.11	12.03	29.87	0.00	105	246	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>104.18</td><td>-----</td><td>-----</td><td>87.78</td><td>34.22</td><td>12.06</td><td>29.88</td><td>0.00</td><td>105</td><td>246</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	104.18	-----	-----	87.78	34.22	12.06	29.88	0.00	105	246
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5147.25	62.01	74.00	-11.99	45.74	34.11	12.03	29.87	0.00	105	246	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5180.00	104.18	-----	-----	87.78	34.22	12.06	29.88	0.00	105	246	PEAK																																																																																							
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.65</td><td>50.39</td><td>54.00</td><td>-3.61</td><td>34.13</td><td>34.10</td><td>12.03</td><td>29.87</td><td>0.00</td><td>105</td><td>246</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.65	50.39	54.00	-3.61	34.13	34.10	12.03	29.87	0.00	105	246	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>95.61</td><td>-----</td><td>-----</td><td>79.21</td><td>34.22</td><td>12.06</td><td>29.88</td><td>0.00</td><td>105</td><td>246</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	95.61	-----	-----	79.21	34.22	12.06	29.88	0.00	105	246
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5149.65	50.39	54.00	-3.61	34.13	34.10	12.03	29.87	0.00	105	246	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5180.00	95.61	-----	-----	79.21	34.22	12.06	29.88	0.00	105	246	AVERAGE																																																																																							

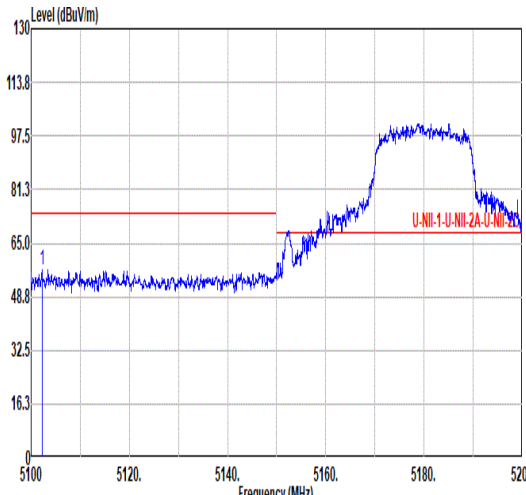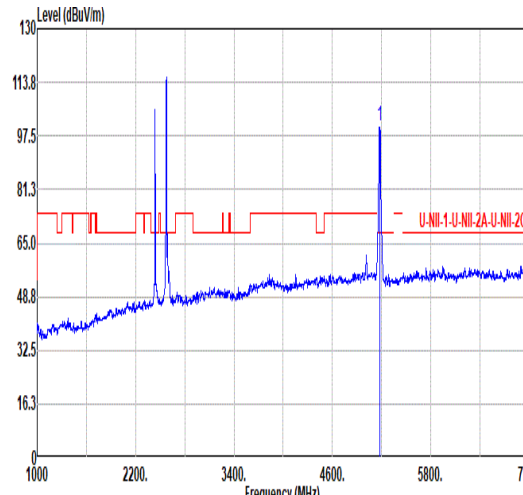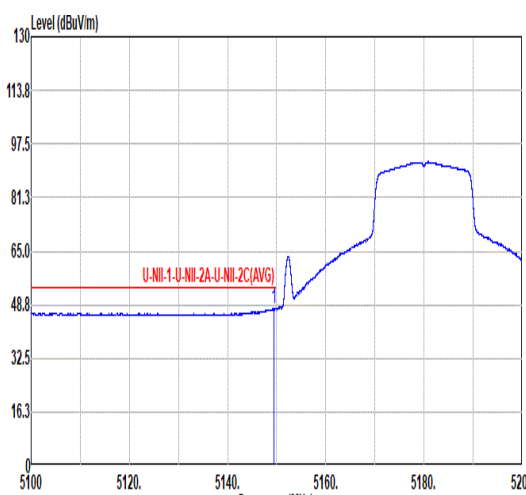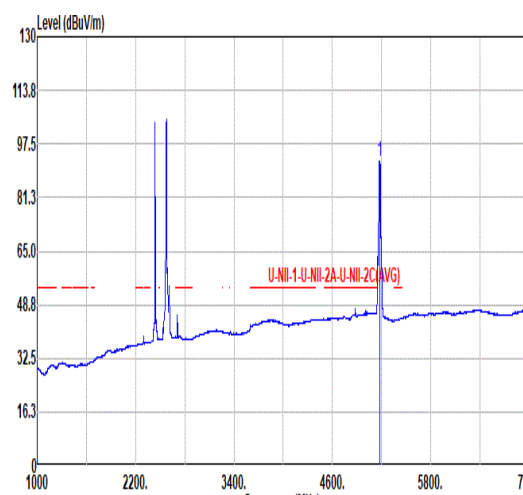

Mode	1																																																																																																
	Band Edge																																																																																																
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz																																																																																																
ANT	4																																																																																																
Pol.	Vertical						Fundamental																																																																																										
Peak																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5102.25</td><td>57.06</td><td>74.00</td><td>-16.94</td><td>40.62</td><td>34.29</td><td>12.00</td><td>29.85</td><td>0.00</td><td>338</td><td>50 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5102.25	57.06	74.00	-16.94	40.62	34.29	12.00	29.85	0.00	338	50 PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>100.33</td><td>-----</td><td>-----</td><td>83.93</td><td>34.22</td><td>12.06</td><td>29.88</td><td>0.00</td><td>338</td><td>50 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	100.33	-----	-----	83.93	34.22	12.06	29.88	0.00	338
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5102.25	57.06	74.00	-16.94	40.62	34.29	12.00	29.85	0.00	338	50 PEAK																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5180.00	100.33	-----	-----	83.93	34.22	12.06	29.88	0.00	338	50 PEAK																																																																																						
Avg																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.45</td><td>47.65</td><td>54.00</td><td>-6.35</td><td>31.39</td><td>34.10</td><td>12.03</td><td>29.87</td><td>0.00</td><td>338</td><td>50 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.45	47.65	54.00	-6.35	31.39	34.10	12.03	29.87	0.00	338	50 AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>92.18</td><td>-----</td><td>-----</td><td>75.78</td><td>34.22</td><td>12.06</td><td>29.88</td><td>0.00</td><td>338</td><td>50 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	92.18	-----	-----	75.78	34.22	12.06	29.88	0.00	338
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5149.45	47.65	54.00	-6.35	31.39	34.10	12.03	29.87	0.00	338	50 AVERAGE																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5180.00	92.18	-----	-----	75.78	34.22	12.06	29.88	0.00	338	50 AVERAGE																																																																																						

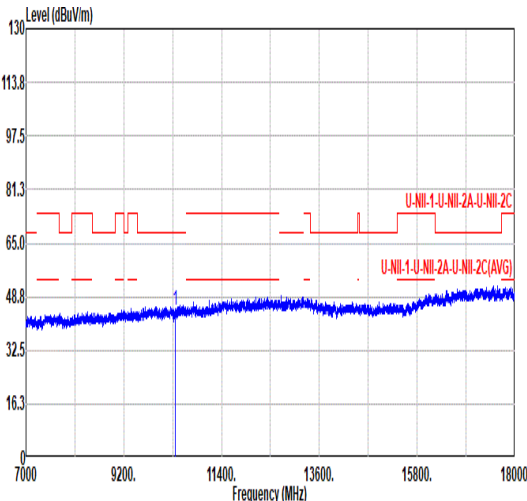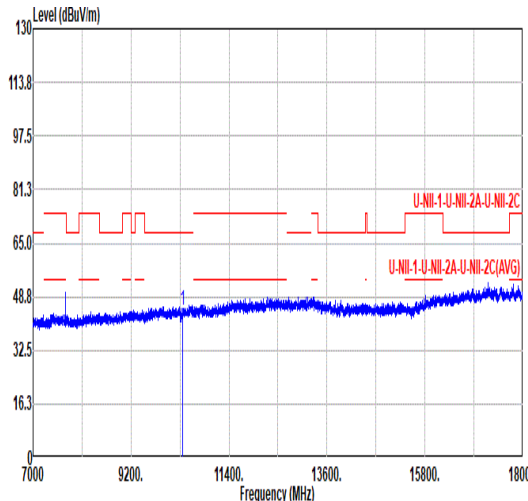

Mode	1																																																																																																
	Harmonic																																																																																																
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz																																																																																																
ANT	4																																																																																																
Pol.	Horizontal						Vertical																																																																																										
Peak Avg																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>44.85</td><td>68.20</td><td>-23.35</td><td>56.40</td><td>37.46</td><td>17.53</td><td>66.54</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	44.85	68.20	-23.35	56.40	37.46	17.53	66.54	0.00	--	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>44.55</td><td>68.20</td><td>-23.65</td><td>56.08</td><td>37.47</td><td>17.54</td><td>66.54</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	44.55	68.20	-23.65	56.08	37.47	17.54	66.54	0.00	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	10360.00	44.85	68.20	-23.35	56.40	37.46	17.53	66.54	0.00	--	PEAK																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	10360.00	44.55	68.20	-23.65	56.08	37.47	17.54	66.54	0.00	--	PEAK																																																																																						

Note: For all plots above, the over limit line signals are Fundamental signal which can be ignored

**For 5G NR n5 NSA:**

Test Engineer :	HuaCong Liang	Relative Humidity :	48~52%
		Temperature :	22-25℃

EN-DC_7A_n5A / LTE 10MHz + NR 20MHz / QPSK (ANT2+0)									
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
NR n5 Middle	1654.5	-65.70	-13	-52.70	-77.23	-68.95	4.00	9.40	H
	2481.75	-59.92	-13	-46.92	-78.65	-63.49	4.88	10.60	H
	3309	-59.16	-13	-46.16	-79.95	-64.09	5.52	12.60	H
	1654.5	-64.93	-13	-51.93	-77.10	-68.18	4.00	9.40	V
	2481.75	-59.78	-13	-46.78	-78.83	-63.35	4.88	10.60	V
	3309	-58.45	-13	-45.45	-79.94	-63.38	5.52	12.60	V
LTE Band7 Middle	5061.18	-58.04	-25	-33.04	-81.16	-63.60	7.14	12.70	H
	7591.77	-55.00	-25	-30.00	-81.25	-58.30	8.30	11.60	H
	10122.36	-52.53	-25	-27.53	-82.91	-54.05	10.48	12.00	H
	5061.18	-57.38	-25	-32.38	-81.71	-62.94	7.14	12.70	V
	7591.77	-55.73	-25	-30.73	-81.98	-59.03	8.30	11.60	V
	10122.36	-51.58	-25	-26.58	-83.01	-53.10	10.48	12.00	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



Appendix C. Reference Report



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2503-1, XT2505-3
FCC ID : IHDT56AU7
STANDARD : 47 CFR Part 27
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S) : Dec. 24, 2024 ~ Dec. 31, 2024

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	5
1.5 Modification of EUT	6
1.6 Maximum EIRP and Emission Designator	6
1.7 Testing Location	8
1.8 Test Software	8
1.9 Applicable Standards	8
1.10 Specification of Accessory	9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	10
2.1 Test Mode	10
2.2 Connection Diagram of Test System	12
2.3 Support Unit used in test configuration and system	12
2.4 Measurement Results Explanation Example	13
2.5 Frequency List of Low/Middle/High Channels	13
3 CONDUCTED TEST ITEMS	16
3.1 Measuring Instruments	16
3.2 Test Setup	16
3.3 Test Result of Conducted Test	16
3.4 Conducted Output Power and EIRP	17
3.5 Peak-to-Average Ratio	18
3.6 Occupied Bandwidth	19
3.7 Conducted Band Edge	20
3.8 Conducted Spurious Emission	21
3.9 Frequency Stability	22
4 RADIATED TEST ITEMS	23
4.1 Measuring Instruments	23
4.2 Test Setup	23
4.3 Test Result of Radiated Test	24
4.4 Radiated Spurious Emission	25
5 LIST OF MEASURING EQUIPMENT	26
6 MEASUREMENT UNCERTAINTY	27
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG4D1311H	Rev. 01	Initial issue of report	Jan. 24, 2025



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§27.50(h)(2)	Equivalent Isotropic Radiated Power (5G NR n7, n41, n38)	EIRP < 2Watt		
3.5	N/A	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§27.53(m)(4)	Conducted Band Edge Measurement (5G NR n7, n41, n38)	§27.53(m)(4)	PASS	-
3.8	§2.1051 §27.53(m)(4)	Conducted Spurious Emission (5G NR n7, n41, n38)	< 55+10log ₁₀ (P[Watts])	PASS	-
3.9	§2.1055 §27.54	Frequency Stability Temperature & Voltage	Within Authorized Band	PASS	-
4.4	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (5G NR n7, n41, n38)	< 55+10log ₁₀ (P[Watts])	PASS	Under limit 26.73 dB at 10050.00 MHz

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2503-1, XT2505-3
FCC ID	IHDT56AU7
IMEI Code	Conducted : 354424860019490 Radiation : 354424860020035/354424860020043
HW Version	DVT2
SW Version	V2VC35.13
EUT Stage	Identical Prototype

Note: There are two types of EUT, model name: XT2503-1 is sample 1 and model name: XT2505-3 is sample 2, the differences could be referred to the XT2503-1, XT2505-3_Operational Description of Product Equality Declaration which is exhibit separately. According to the difference, for RF report, we choose sample 1 to full test.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	5G NR n7 : 2500 MHz ~ 2570 MHz 5G NR n38 : 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz
Rx Frequency	5G NR n7 : 2620 MHz ~ 2690 MHz 5G NR n38: 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz
Bandwidth	n7: 5MHz / 10MHz / 15MHz / 20MHz / 25MHz / 30MHz / 35MHz / 40MHz / 50MHz n38: 10MHz / 15MHz / 20MHz / 25MHz / 30MHz / 40MHz n41 : 10MHz / 15MHz / 20MHz / 25MHz / 30MHz / 35MHz / 40MHz / 45MHz / 50MHz / 60MHz / 70MHz / 80MHz / 90MHz / 100MHz
SCS	15kHz for FDD Bands, 30kHz for TDD Bands
Antenna Gain	<Ant. 0>: n38: -3.9 dBi

	n41: -3.9 dBi <Ant. 1>: n7: -1.3 dBi n38: -1.3 dBi n41: -1.3 dBi <Ant. 2>: n7: -2.4 dBi n38: -2.4 dBi n41: -2.4 dBi <Ant. 9>: n38: -6.1 dBi n41: -6.1 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

Remark:

1. The maximum EIRP is calculated from max output power and max antenna gain, only the maximum EIRP are shown in the report, 5G NR n7 for Ant. 2, EN DC_4A-n41A for Ant.(2+1)and EN DC_2A-n38A for Ant.(2+1).
2. All the supported ENDC combinations are verified conducted power, only the ENDC combination with highest power are shown in the report.
3. 5G NR support SA (n7) mode and NSA(n7/n38/n41) mode. According to the maximum power between SA and NSA mode, SA covers NSA mode for (n7).
4. The EN-DC mode combination could be referred to the product spec.
5. The device supports two PAs(Main PA and other PA) for 5G NR n7, we chose higher power PA to calculate the EIRP and show in the report.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum EIRP and Emission Designator

5G NR n7 other PA		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5	2502.5 ~ 2567.5	0.1493	4M46G7D	0.1268	4M48W7D
10	2505.0 ~ 2565.0	0.1521	9M28G7D	0.1327	9M29W7D
15	2507.5 ~ 2562.5	0.1556	14M1G7D	0.1327	14M1W7D
20	2510.0 ~ 2560.0	0.1581	18M9G7D	0.1327	18M9W7D
25	2512.5 ~ 2557.5	0.1589	23M7G7D	0.1282	23M8W7D
30	2515.0 ~ 2555.0	0.1618	28M6G7D	0.1324	28M6W7D
35	2517.5 ~ 2552.5	0.1603	33M5G7D	0.1330	33M6W7D
40	2520.0 ~ 2550.0	0.1574	38M5G7D	0.1334	38M6W7D
50	2525.0 ~ 2545.0	0.1637	48M2G7D	0.1390	48M3W7D



5G NR n38 EN DC_2A-n38A		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	2575.0 ~ 2615.0	0.1507	8M59G7D	0.1216	8M59W7D
15	2577.5 ~ 2612.5	0.1507	13M6G7D	0.1211	13M6W7D
20	2580.0 ~ 2610.0	0.1489	18M2G7D	0.1205	18M2W7D
25	2582.5 ~ 2607.5	0.1486	23M2G7D	0.1180	23M3W7D
30	2585.0 ~ 2605.0	0.1500	27M9G7D	0.1211	27M9W7D
40	2590.0 ~ 2600.0	0.1514	37M9G7D	0.1208	37M9W7D

5G NR n41 EN DC_4A-n41A		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	2501.01 ~ 2685.00	0.1600	8M59G7D	0.1268	8M59W7D
15	2503.50 ~ 2682.48	0.1596	13M6G7D	0.1282	13M6W7D
20	2506.02 ~ 2679.99	0.1560	18M2G7D	0.1303	18M2W7D
25	2508.51 ~ 2677.50	0.1567	23M2G7D	0.1256	23M3W7D
30	2511.00 ~ 2674.98	0.1552	27M9G7D	0.1236	27M9W7D
35	2513.52 ~ 2672.49	0.1560	32M9G7D	0.1253	32M9W7D
40	2516.01 ~ 2670.00	0.1563	37M9G7D	0.1250	37M9W7D
45	2518.50 ~ 2667.48	0.1578	42M5G7D	0.1250	42M6W7D
50	2521.02 ~ 2664.99	0.1531	47M4G7D	0.1213	47M5W7D
60	2526.00 ~ 2659.98	0.1578	57M8G7D	0.1253	57M9W7D
70	2531.01 ~ 2655.00	0.1648	67M6G7D	0.1318	67M5W7D
80	2536.02 ~ 2649.99	0.1671	77M4G7D	0.1330	77M5W7D
90	2541.00 ~ 2644.98	0.1644	87M4G7D	0.1312	87M6W7D
100	2546.01 ~ 2640.00	0.1706	97M5G7D	0.1324	97M6W7D

Note:

1. 5G NR n41 overlaps the entire frequency range of 5G NR n38. Therefore, the test results provided in this report covers 5G NR n41 as well as 5G NR n38.
2. All modulations have been tested, only the worst test results of PSK & QAM are shown in the report.

1.7 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH01-SZ	CN1256	421272

1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 27
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

All test items were verified and recorded according to the standards and without any deviation during the test.



1.10 Specification of Accessory

Accessories Information				
AC Adapter 1(US)	Brand Name	Motorola(Chenyang)	Model Name	MC-681N
AC Adapter 1(EU)	Brand Name	Motorola(Chenyang)	Model Name	MC-682N
AC Adapter 1(UK)	Brand Name	Motorola(Chenyang)	Model Name	MC-683N
AC Adapter 1(AU)	Brand Name	Motorola(Chenyang)	Model Name	MC-685N
AC Adapter 1(AR)	Brand Name	Motorola(Chenyang)	Model Name	MC-686N
AC Adapter 1(BR)	Brand Name	Motorola(Chenyang)	Model Name	MC-687N
AC Adapter 1(CHILE)	Brand Name	Motorola(Chenyang)	Model Name	MC-689N
AC Adapter 2(US)	Brand Name	Motorola(Acbel)	Model Name	MC-681N
AC Adapter 2(EU)	Brand Name	Motorola(Acbel)	Model Name	MC-682N
AC Adapter 2(UK)	Brand Name	Motorola(Acbel)	Model Name	MC-683N
AC Adapter 2(AU)	Brand Name	Motorola(Acbel)	Model Name	MC-685N
AC Adapter 2(AR)	Brand Name	Motorola(Acbel)	Model Name	MC-686N
AC Adapter 2(BR)	Brand Name	Motorola(Acbel)	Model Name	MC-687N
AC Adapter 2(CHILE)	Brand Name	Motorola(Acbel)	Model Name	MC-689N
Battery 1	Brand Name	Motorola(ATL)	Model Name	RM52
Battery 2	Brand Name	Motorola(Cosmx)	Model Name	RM52
USB Cable 1	Brand Name	Motorola(saibao)	Model Name	SC18D71644
USB Cable 2	Brand Name	Motorola(Luxshare)	Model Name	SC18E08104
USB Cable 3	Brand Name	Motorola(saibao)	Model Name	SC18D86731
USB Cable 4	Brand Name	Motorola(Luxshare)	Model Name	SC18E08103
Wireless Earphones	Brand Name	Motorola	Model Name	XT2443-1



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z for Adapter mode and Earphone mode. The worst cases (Y/Z plane- Adapter mode) were recorded in this report.

The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.


Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane

Test Items	5G NR	Bandwidth (MHz)																Modulation					RB #		Test Channel		
		5	10	15	20	25	30	35	40	45	50	60	70	80	90	100	PI/2 BPSK	DPSK	16 QAM	64 QAM	256 QAM	1	Full	L	M	H	
Max. Output Power	n7	v	v	v	v	v	v	v	v	-	v	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	
	n38	-	v	v	v	v	v	-	v	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	
	n41	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	
Peak-to-Average Ratio	n7				v					-		-	-	-	-	-	v	v					v		v		
	n41	-			v												v	v					v		v		
26dB and 99% Bandwidth	n7	v	v	v	v	v	v	v	v	-	v	-	-	-	-	-		v	v	v	v		v		v		
	n41	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v		v	v	v	v		v		v		
Conducted Band Edge	n7	v				v				-	v	-	-	-	-	-	v	v				v	v	v		v	
	n41	-	v						v							v	v	v				v	v	v		v	
Conducted Spurious Emission	n7	v				v				-	v	-	-	-	-	-	v	v				v		v	v	v	
	n41	-	v						v							v	v	v				v		v	v	v	
Frequency Stability	n7				v					-		-	-	-	-	-		v					v		v		
	n41	-			v													v					v		v		
E.R.P / E.I.R.P	n7	v	v	v	v	v	v	v	v	-	v	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	
	n38	-	v	v	v	v	v	-	v	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	
	n41	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	
Radiated	n7	Worst Case																							v		



Test Items	5G NR	Bandwidth (MHz)																Modulation				RB #		Test Channel		
		5	10	15	20	25	30	35	40	45	50	60	70	80	90	100	PI/2 BPSK	QPSK	16 QAM	64 QAM	256 QAM	1	Full	L	M	H
Spurious Emission	n41	Worst Case																						v		
Note	1. The mark “v” means that this configuration is chosen for testing 2. The mark “-” means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. Frequency Stability : Normal Voltage = 3.91V ; Low Voltage =3.60V. ; High Voltage =4.50V																									

2.2 Connection Diagram of Test System

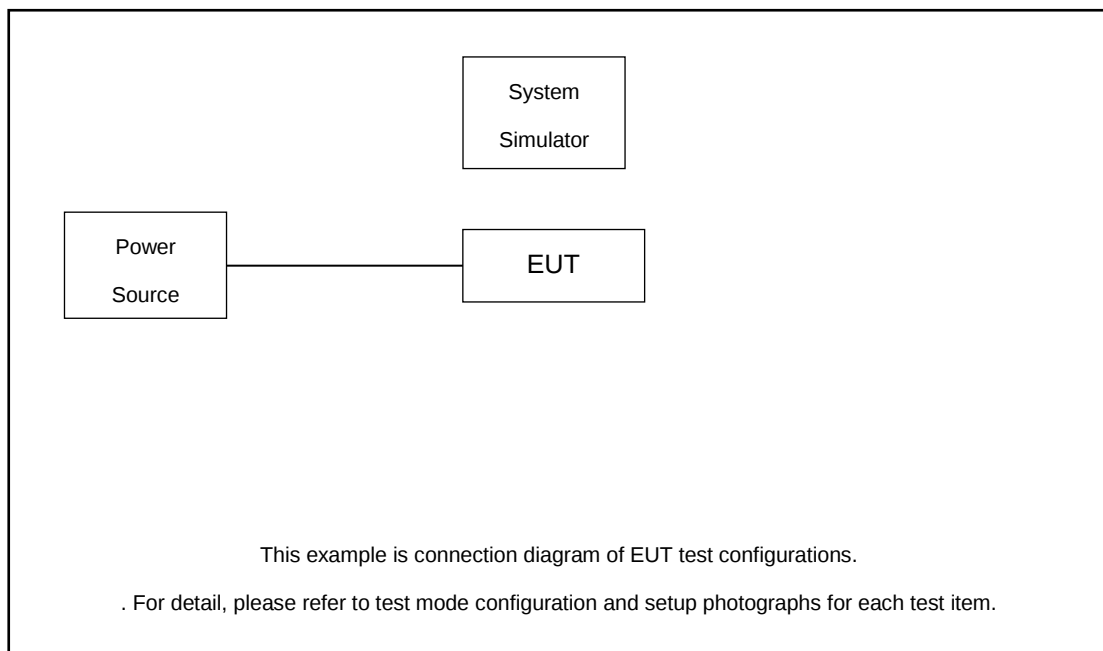

The EUT has been configuration operated in a manner tended to maximize its emission characteristics in a typical application.

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 8.6 dB.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} . \\ &= 8.6 \text{ (dB)} \end{aligned}$$

2.5 Frequency List of Low/Middle/High Channels

5G NR n7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
50	Channel	505000	507000	509000
	Frequency	2525	2535	2545
40	Channel	504000	507000	510000
	Frequency	2520	2535	2550
35	Channel	503500	507000	501500
	Frequency	2517.5	2535	2552.5
30	Channel	503000	507000	511000
	Frequency	2515	2535	2555
25	Channel	502500	507000	511500
	Frequency	2512.5	2535	2557.5
20	Channel	502000	507000	512000
	Frequency	2510	2535	2560
15	Channel	501500	507000	512500
	Frequency	2507.5	2535	2562.5
10	Channel	501000	507000	513000
	Frequency	2505	2535	2565
5	Channel	500500	507000	513500
	Frequency	2502.5	2535	2567.5



5G NR n38 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	518000	519000	520000
	Frequency	2590	2595	2600
30	Channel	517000	519000	521000
	Frequency	2585	2595	2605
25	Channel	516500	519000	521500
	Frequency	2582.5	2595	2607.5
20	Channel	516000	519000	522000
	Frequency	2580	2595	2610
15	Channel	515500	519000	522500
	Frequency	2577.5	2595	2612.5
10	Channel	515000	519000	523000
	Frequency	2575	2595	2615

5G NR n41 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	509202	518598	528000
	Frequency	2546.01	2592.99	2640
90	Channel	508200	518598	528996
	Frequency	2541	2592.99	2644.98
80	Channel	507204	518598	529998
	Frequency	2536.02	2592.99	2649.99
70	Channel	506202	518598	531000
	Frequency	2531.01	2592.99	2655
60	Channel	505200	518598	531996
	Frequency	2526	2592.99	2659.98
50	Channel	504204	518598	532998
	Frequency	2521.02	2592.99	2664.99
45	Channel	503700	518598	533496
	Frequency	2518.5	2592.99	2667.48
40	Channel	503202	518598	534000
	Frequency	2516.01	2592.99	2670
35	Channel	502704	518598	534498
	Frequency	2513.52	2592.99	2672.49
30	Channel	502200	518598	534996
	Frequency	2511	2592.99	2674.98



25	Channel	501702	518598	535500
	Frequency	2508.51	2592.99	2677.5
20	Channel	501204	518598	535998
	Frequency	2506.02	2592.99	2679.99
15	Channel	500700	518598	536496
	Frequency	2503.5	2592.99	2682.48
10	Channel	500202	518598	537000
	Frequency	2501.01	2592.99	2685


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

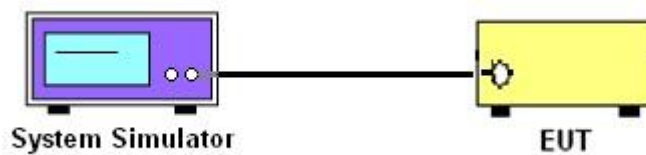

3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

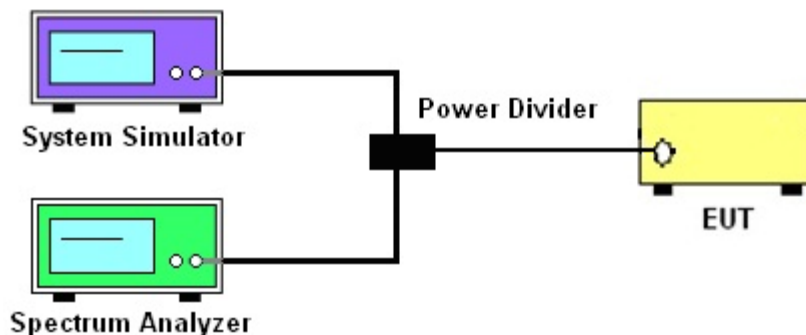

3.2.3 Frequency Stability

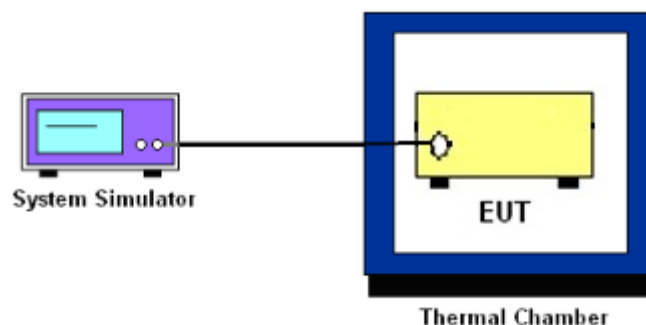

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power and EIRP

3.4.1 Description of the Conducted Output Power Measurement and EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The EIRP of mobile transmitters must not exceed 2 Watts for 5G NR n7, n38, n41.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

27.53(m)(4)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used or a narrower RBW was used (generally limited to no less than 1% of the OBW) and the measured power was integrated over the full required measurement bandwidth.
6. Set spectrum analyzer with RMS detector.
7. Offset has included the duty factor for 5G NR n41. Duty factor $= 10 \log (1/x)$, where x is the measured duty cycle
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from $43 + 10 \log (P)$ dB below the transmitter power P(Watts)

$= P(W) - [43 + 10 \log (P)]$ (dB)

$= [30 + 10 \log (P)]$ (dBm) - $[43 + 10 \log (P)]$ (dB) = -13dBm.

10. For 5G NR n7/n38/n41, the other 40 dB, and 55 dB have additionally applied same calculation above.

11. When using the integration method, the starting frequency of the integration shall be centered at one-half of the RBW away from the band edge.

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

For 5G NR n7/n38/n41:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Offset has included the duty factor for 5G NR n41. Duty factor = $10 \log (1/x)$, where x is the measured duty cycle
9. Taking the record of maximum spurious emission.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
11. The limit line is derived from $43 + 10 \log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [43 + 10 \log(P)]$ (dB)
= $[30 + 10 \log(P)]$ (dBm) - $[43 + 10 \log(P)]$ (dB)
= -13dBm.
12. For 5G NR n7/n38/n41
The limit line is derived from $55 + 10 \log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [55 + 10 \log(P)]$ (dB)
= $[30 + 10 \log(P)]$ (dBm) - $[55 + 10 \log(P)]$ (dB)
= -25dBm.

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at 20±5°C and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

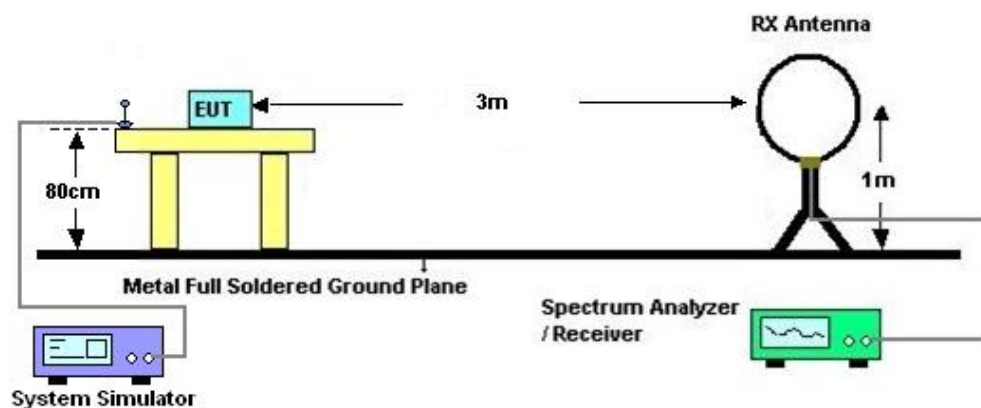

4.2.2 For radiated test from 30MHz to 1GHz

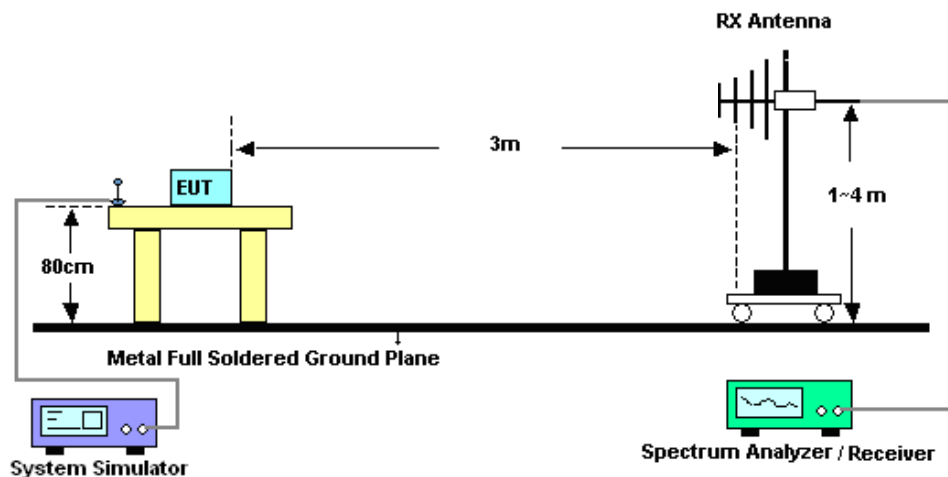

4.2.3 For radiated test above 1GHz

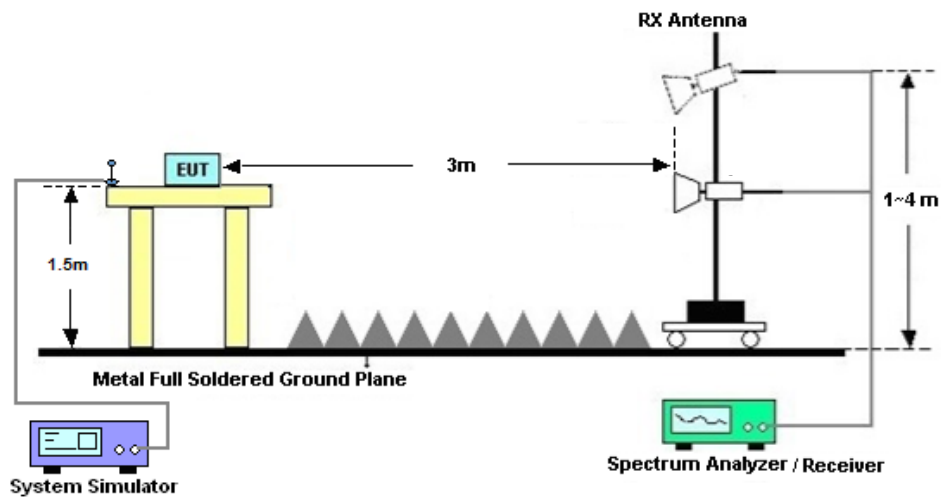

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26.

For 5G NR n7/n38/n41

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$= P(W) - [43 + 10\log(P)] \text{ (dB)}$

$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$

$= -13\text{dBm}.$

13. For 5G NR n7/n38/n41:

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 09, 2024	Dec. 24, 2024~Dec. 31, 2024	Apr. 08, 2025	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-04 265	60.06.020.007 7	0.4GHz~26.5GHz	Dec. 24, 2024	Dec. 24, 2024~Dec. 31, 2024	Dec. 23, 2025	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Jul. 03, 2024	Dec. 24, 2024~Dec. 31, 2024	Jul. 02, 2025	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec. 26, 2024	Dec. 27, 2024	Dec. 25, 2025	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 29, 2023	Dec. 27, 2024	Dec. 28, 2024	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5Ghz	Oct. 14, 2024	Dec. 27, 2024	Oct. 13, 2025	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	Oct. 24, 2023	Dec. 27, 2024	Oct. 23, 2025	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 04, 2024	Dec. 27, 2024	Jul. 03, 2025	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Apr. 09, 2024	Dec. 27, 2024	Apr. 08, 2025	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 09, 2024	Dec. 27, 2024	Apr. 08, 2025	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P-R	1943528	1GHz~18GHz	Oct. 14, 2024	Dec. 27, 2024	Oct. 13, 2025	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35 -HG	1871923	18GHz~40GHz	Jul. 03, 2024	Dec. 27, 2024	Jul. 02, 2025	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	Oct. 14, 2024	Dec. 27, 2024	Oct. 13, 2025	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Dec. 27, 2024	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Dec. 27, 2024	NCR	Radiation (03CH01-SZ)

NCR: No Calibration Required

6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	± 1.34 dB
Occupied Channel Bandwidth	± 0.012 MHz
Conducted Power	± 1.34 dB
Peak to Average Ratio	± 1.34 dB
Frequency Stability	± 1.3 Hz

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.48 dB
--	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	3.53 dB
--	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.02 dB
--	---------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Khan Zhen	Temperature :	22~23℃
		Relative Humidity :	40~42%



FR1 N7(Main PA)

Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	16.9	PASS	NV
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	16.5	PASS	LV
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	13.6	PASS	HV
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	13.7	PASS	-30°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	15.1	PASS	-20°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	16	PASS	-10°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	19	PASS	0°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	14.4	PASS	10°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	16.9	PASS	20°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	18.5	PASS	30°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	19.4	PASS	40°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	18.7	PASS	50°C


 $|\text{MAX}(\Delta f)| = 19.4 \text{ Hz}$

Frequency Stability	Frequency (MHz)	Limit Line	Result
$f_L - \text{MAX}(\Delta f) $	2500.5294806	$\geq 2500 \text{ MHz}$	PASS
$f_H + \text{MAX}(\Delta f) $	2569.3916194	$\leq 2570 \text{ MHz}$	

Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
7	15	20	507000	2535.0	DFT-s-OFDM PI/2 BPSK	100@0	4.15	13	PASS
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	5.23	13	PASS

N7(20M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH

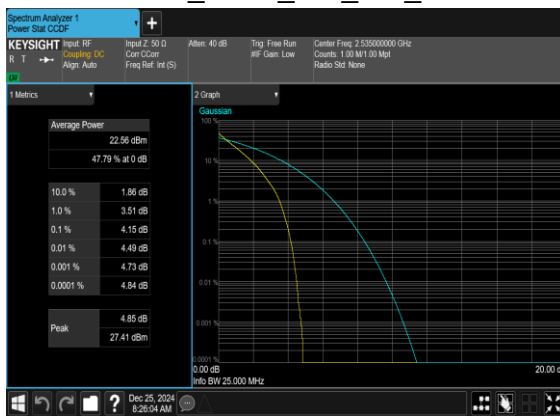

N7(20M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH



**Occupied Bandwidth**


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
7	15	5	507000	2535.0	CP-OFDM QPSK	25@0	4.4614	4.79
7	15	5	507000	2535.0	CP-OFDM 16 QAM	25@0	4.4674	4.814
7	15	5	507000	2535.0	CP-OFDM 64 QAM	25@0	4.4807	4.84
7	15	5	507000	2535.0	CP-OFDM 256 QAM	25@0	4.4689	4.827
7	15	10	507000	2535.0	CP-OFDM QPSK	52@0	9.2764	9.708
7	15	10	507000	2535.0	CP-OFDM 16 QAM	52@0	9.2644	9.747
7	15	10	507000	2535.0	CP-OFDM 64 QAM	52@0	9.2817	9.697
7	15	10	507000	2535.0	CP-OFDM 256 QAM	52@0	9.2604	9.725
7	15	15	507000	2535.0	CP-OFDM QPSK	79@0	14.118	14.67
7	15	15	507000	2535.0	CP-OFDM 16 QAM	79@0	14.101	14.69
7	15	15	507000	2535.0	CP-OFDM 64 QAM	79@0	14.107	14.6
7	15	15	507000	2535.0	CP-OFDM 256 QAM	79@0	14.121	14.66
7	15	20	507000	2535.0	CP-OFDM QPSK	106@0	18.905	19.74
7	15	20	507000	2535.0	CP-OFDM 16 QAM	106@0	18.897	19.66
7	15	20	507000	2535.0	CP-OFDM 64 QAM	106@0	18.915	19.6
7	15	20	507000	2535.0	CP-OFDM 256 QAM	106@0	18.897	19.62
7	15	25	507000	2535.0	CP-OFDM QPSK	133@0	23.738	24.61
7	15	25	507000	2535.0	CP-OFDM 16 QAM	133@0	23.77	24.68
7	15	25	507000	2535.0	CP-OFDM 64 QAM	133@0	23.724	24.65
7	15	25	507000	2535.0	CP-OFDM 256 QAM	133@0	23.761	24.68
7	15	30	507000	2535.0	CP-OFDM QPSK	160@0	28.574	29.64
7	15	30	507000	2535.0	CP-OFDM 16 QAM	160@0	28.526	29.74




7	15	30	507000	2535.0	CP-OFDM 64 QAM	160@0	28.493	29.6
7	15	30	507000	2535.0	CP-OFDM 256 QAM	160@0	28.562	29.62
7	15	35	507000	2535.0	CP-OFDM QPSK	188@0	33.479	34.72
7	15	35	507000	2535.0	CP-OFDM 16 QAM	188@0	33.552	34.8
7	15	35	507000	2535.0	CP-OFDM 64 QAM	188@0	33.614	34.83
7	15	35	507000	2535.0	CP-OFDM 256 QAM	188@0	33.473	34.7
7	15	40	507000	2535.0	CP-OFDM QPSK	216@0	38.527	39.81
7	15	40	507000	2535.0	CP-OFDM 16 QAM	216@0	38.575	39.85
7	15	40	507000	2535.0	CP-OFDM 64 QAM	216@0	38.592	39.84
7	15	40	507000	2535.0	CP-OFDM 256 QAM	216@0	38.575	39.95
7	15	50	507000	2535.0	CP-OFDM QPSK	270@0	48.176	49.75
7	15	50	507000	2535.0	CP-OFDM 16 QAM	270@0	48.235	49.74
7	15	50	507000	2535.0	CP-OFDM 64 QAM	270@0	48.258	49.81
7	15	50	507000	2535.0	CP-OFDM 256 QAM	270@0	48.167	49.72




N7(5M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

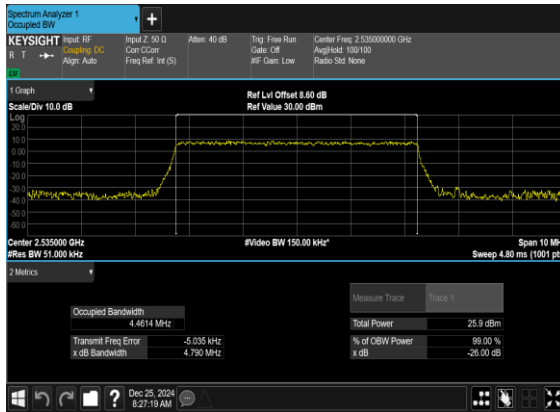


N7(5M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

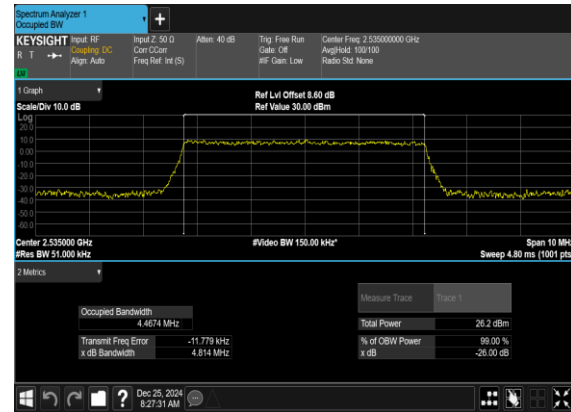

N7(5M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

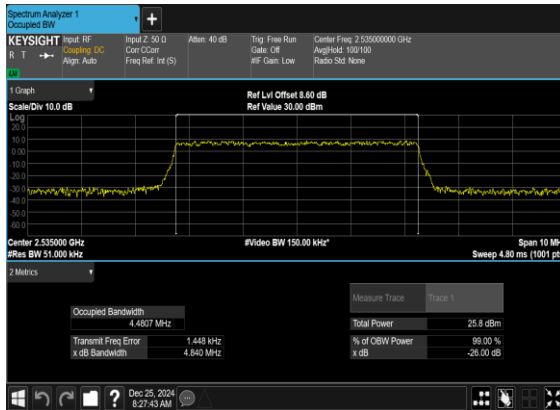


N7(5M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

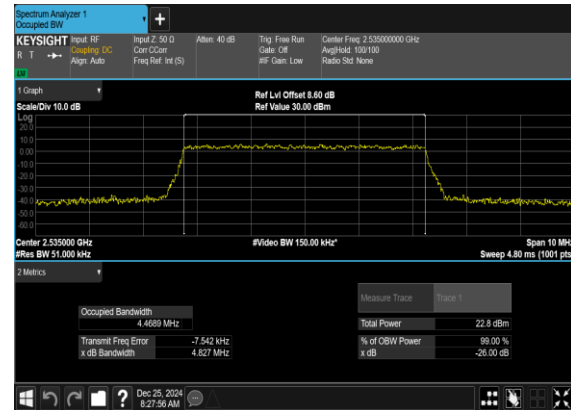





N7(10M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

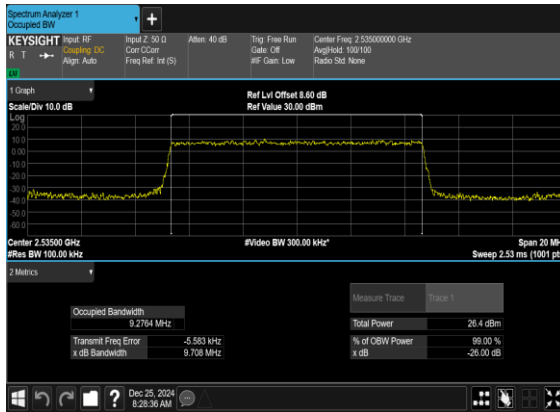


N7(10M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

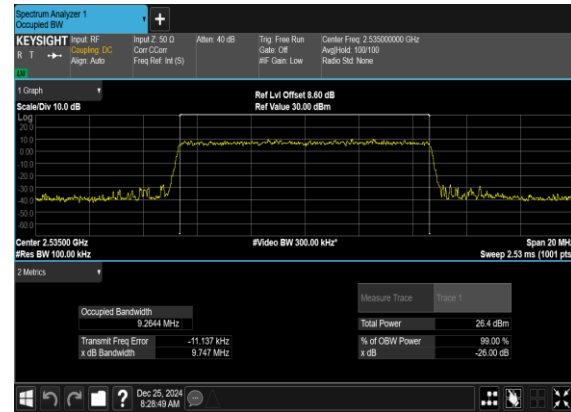

N7(10M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

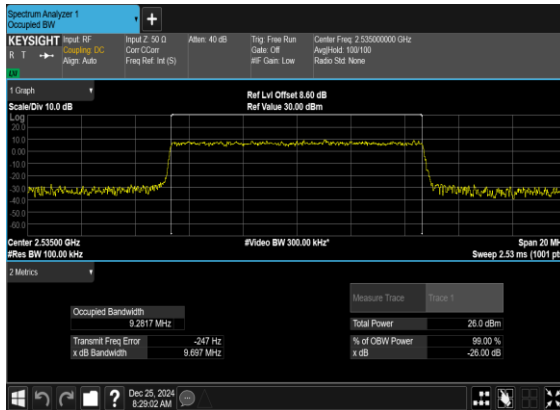


N7(10M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

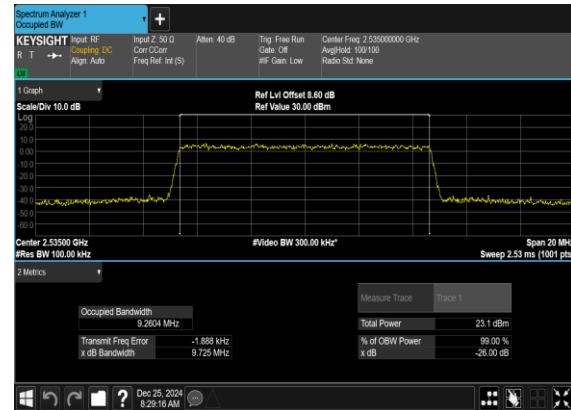





N7(15M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

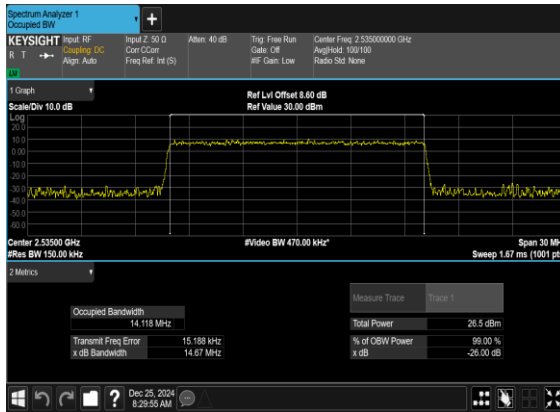


N7(15M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

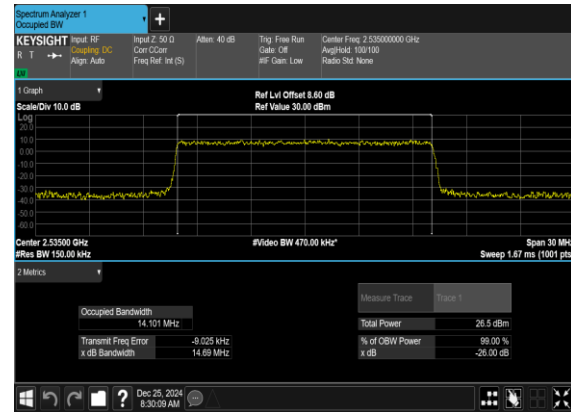

N7(15M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

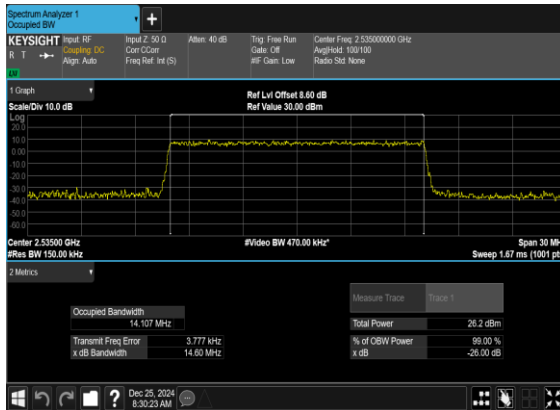


N7(15M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

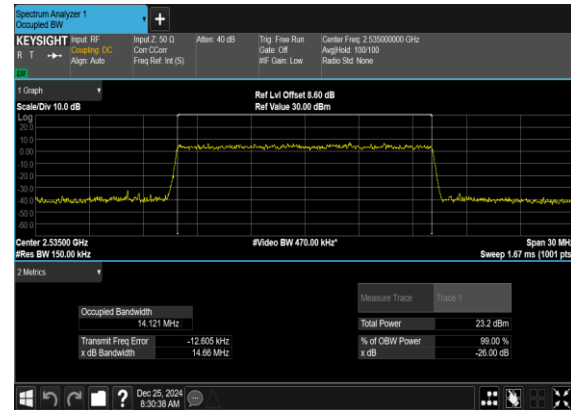





N7(20M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

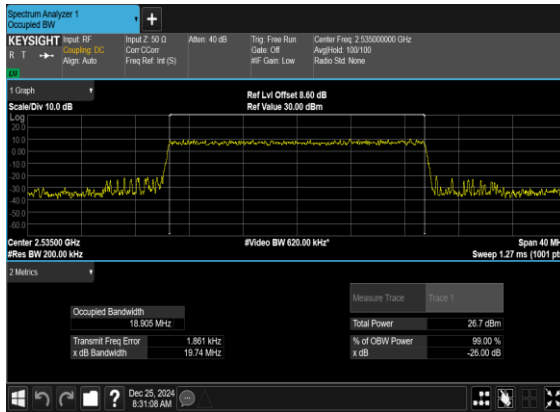


N7(20M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

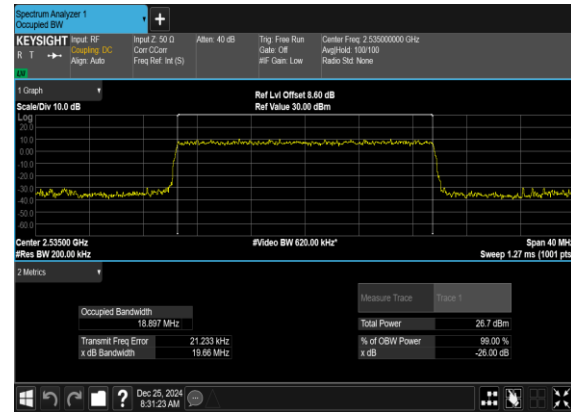

N7(20M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

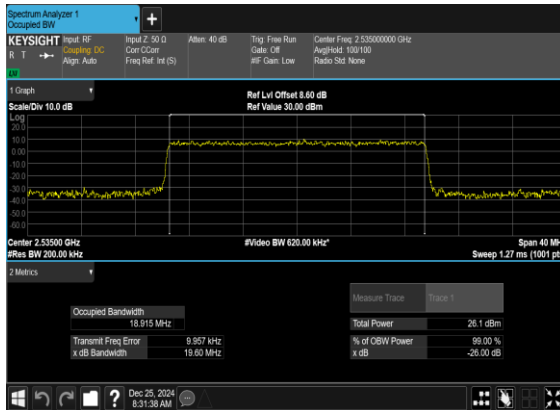


N7(20M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

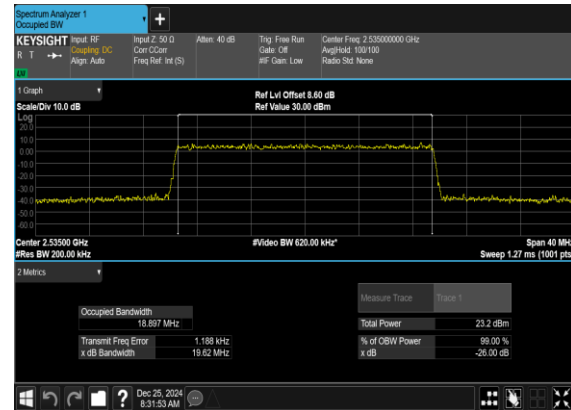





N7(25M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

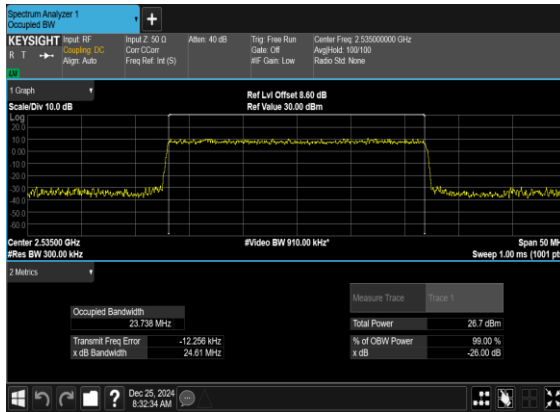


N7(25M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

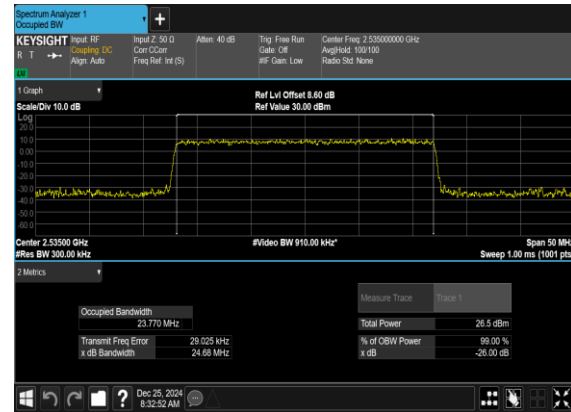

N7(25M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

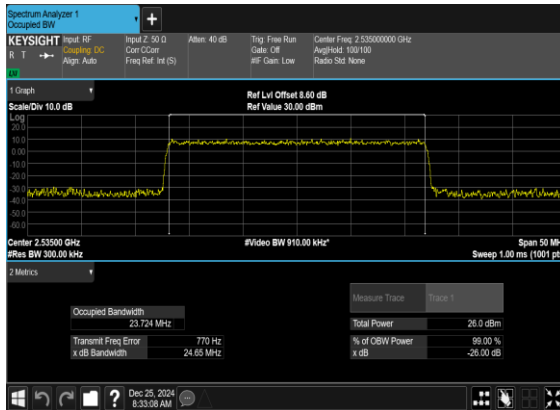


N7(25M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

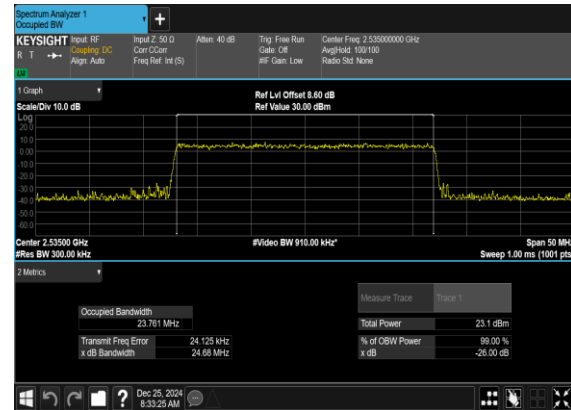





N7(30M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

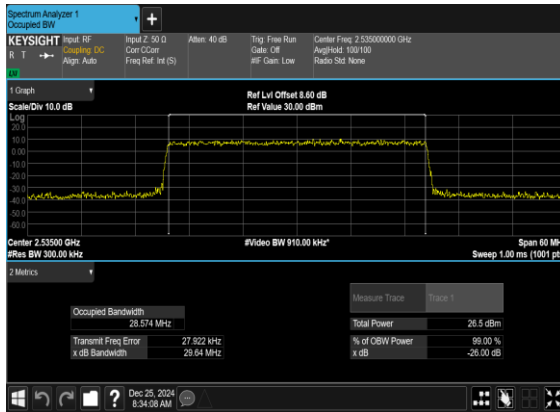


N7(30M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

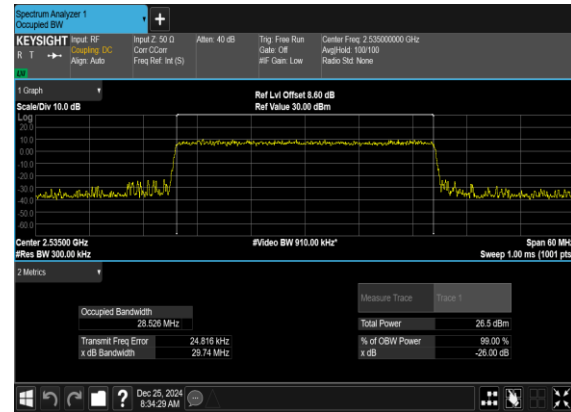

N7(30M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

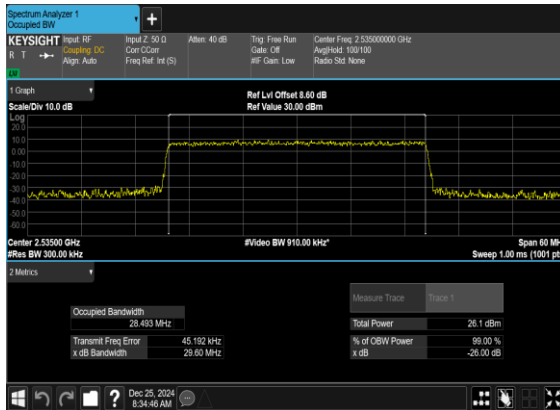


N7(30M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

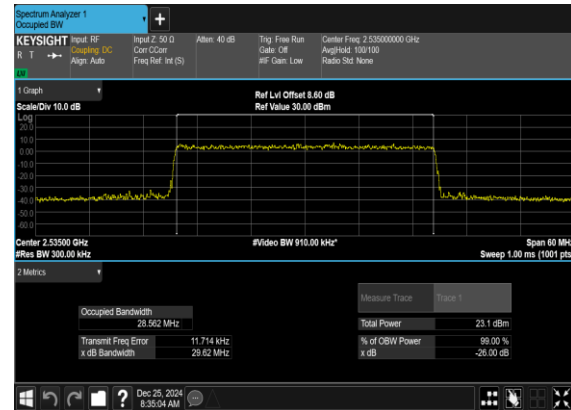





N7(35M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

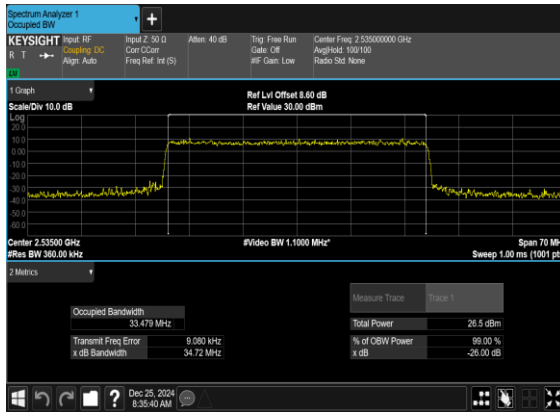


N7(35M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

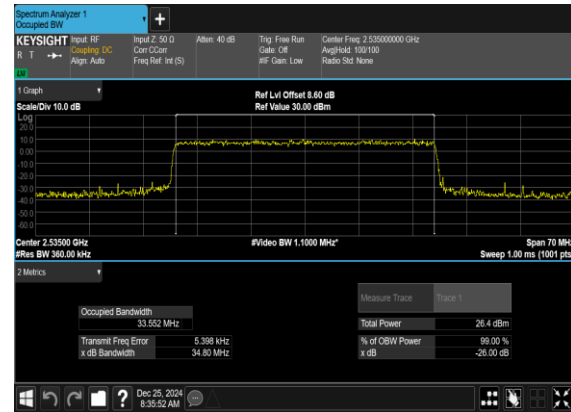

N7(35M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

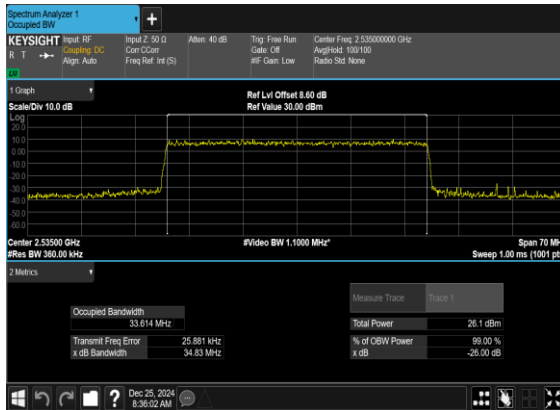


N7(35M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

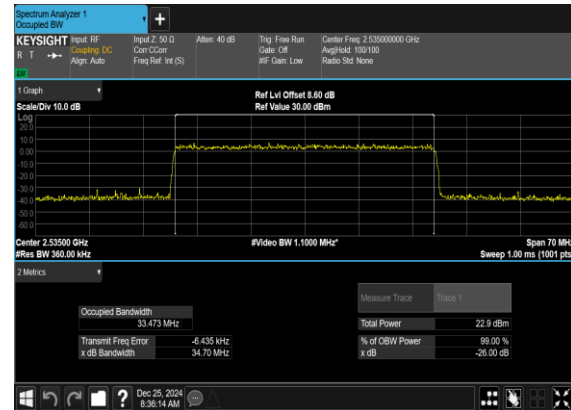





N7(40M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

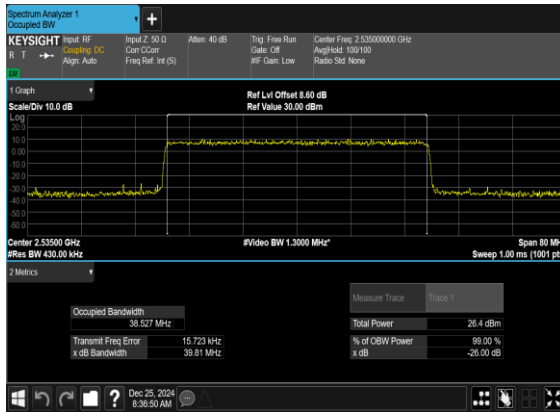


N7(40M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

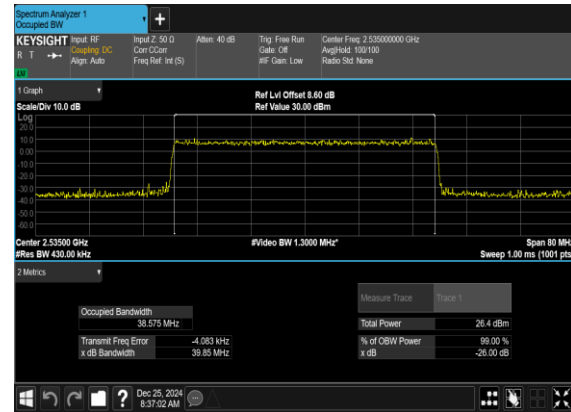

N7(40M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

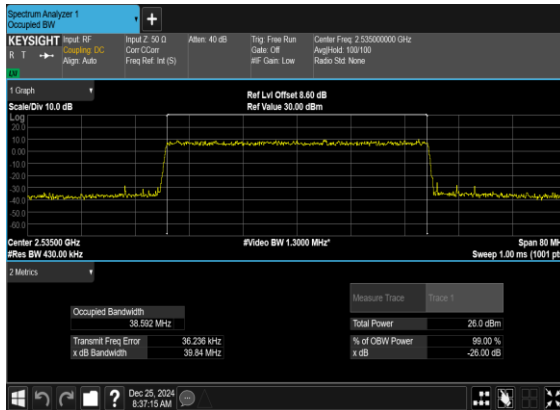


N7(40M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

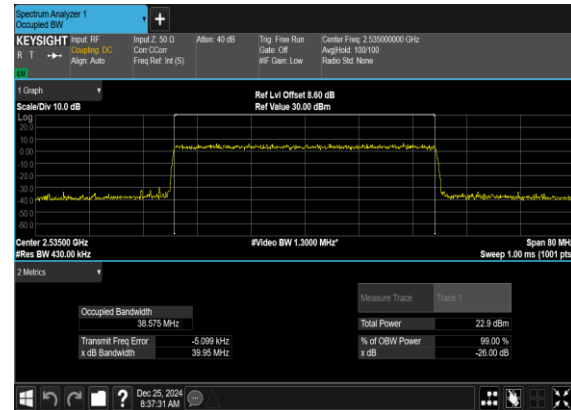





N7(50M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

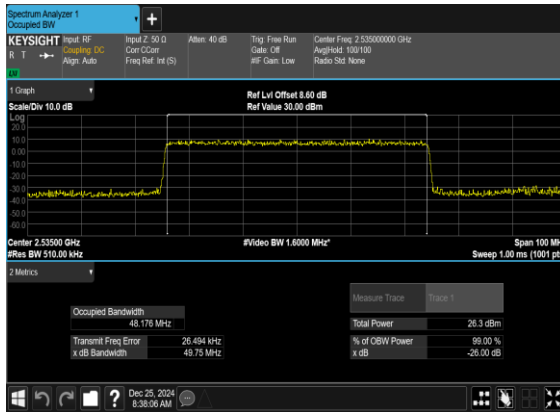


N7(50M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

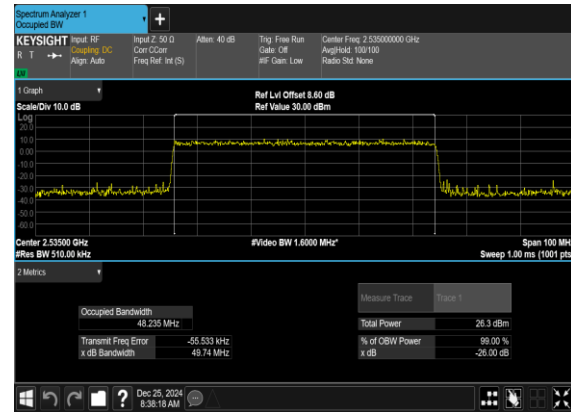

N7(50M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

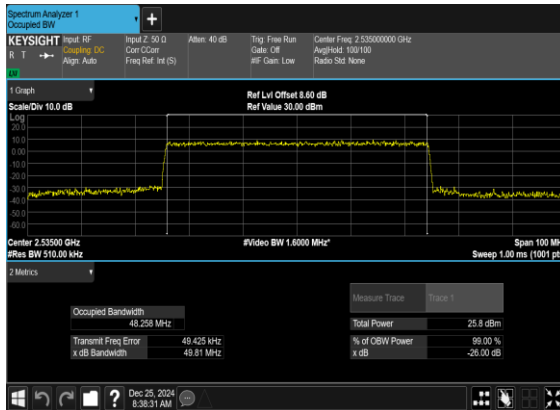

N7(50M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

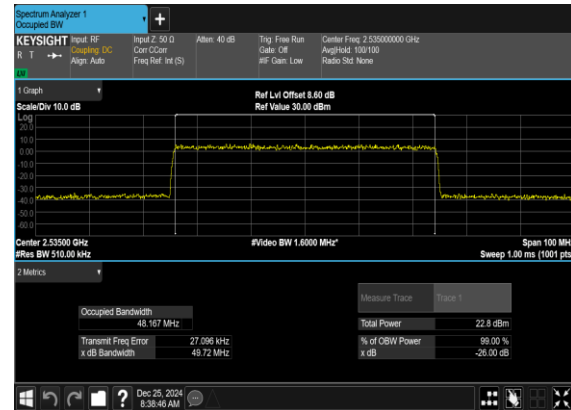



Conducted Spurious Emissions

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
7	15	5	500500	2502.5	DFT-s-OFDM BPSK	1@0	see graph	---
7	15	5	500500	2502.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	5	500500	2502.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	5	500500	2502.5	DFT-s-OFDM QPSK	1@0	see graph	---
7	15	5	500500	2502.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	5	500500	2502.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	5	507000	2535.0	DFT-s-OFDM BPSK	1@0	see graph	---
7	15	5	507000	2535.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	5	507000	2535.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	5	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	---
7	15	5	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	5	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	5	513500	2567.5	DFT-s-OFDM BPSK	1@0	see graph	---
7	15	5	513500	2567.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	5	513500	2567.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	5	513500	2567.5	DFT-s-OFDM QPSK	1@0	see graph	---
7	15	5	513500	2567.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	5	513500	2567.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	25	502500	2512.5	DFT-s-OFDM BPSK	1@0	see graph	---
7	15	25	502500	2512.5	DFT-s-OFDM BPSK	1@0	see graph	PASS




7	15	25	502500	2512.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	25	502500	2512.5	DFT-s-OFDM QPSK	1@0	see graph	---
7	15	25	502500	2512.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	25	502500	2512.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	25	507000	2535.0	DFT-s-OFDM BPSK	1@0	see graph	---
7	15	25	507000	2535.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	25	507000	2535.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	25	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	---
7	15	25	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	25	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	25	511500	2557.5	DFT-s-OFDM BPSK	1@0	see graph	---
7	15	25	511500	2557.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	25	511500	2557.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	25	511500	2557.5	DFT-s-OFDM QPSK	1@0	see graph	---
7	15	25	511500	2557.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	25	511500	2557.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	50	505000	2525.0	DFT-s-OFDM BPSK	1@0	see graph	---
7	15	50	505000	2525.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	50	505000	2525.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	50	505000	2525.0	DFT-s-OFDM QPSK	1@0	see graph	---
7	15	50	505000	2525.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	50	505000	2525.0	DFT-s-OFDM QPSK	1@0	see graph	PASS




7	15	50	507000	2535.0	DFT-s-OFDM BPSK	1@0	see graph	---
7	15	50	507000	2535.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	50	507000	2535.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	50	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	---
7	15	50	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	50	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	50	509000	2545.0	DFT-s-OFDM BPSK	1@0	see graph	---
7	15	50	509000	2545.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	50	509000	2545.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	50	509000	2545.0	DFT-s-OFDM QPSK	1@0	see graph	---
7	15	50	509000	2545.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	50	509000	2545.0	DFT-s-OFDM QPSK	1@0	see graph	PASS




N7(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

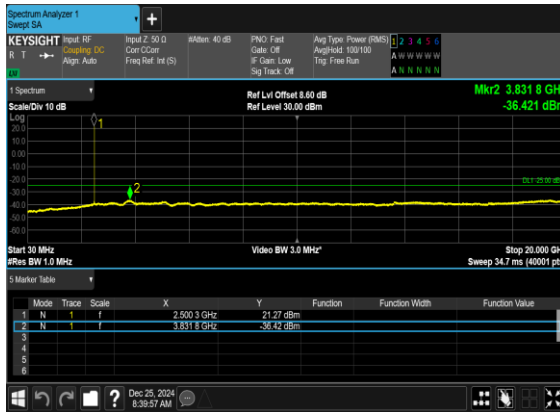


N7(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

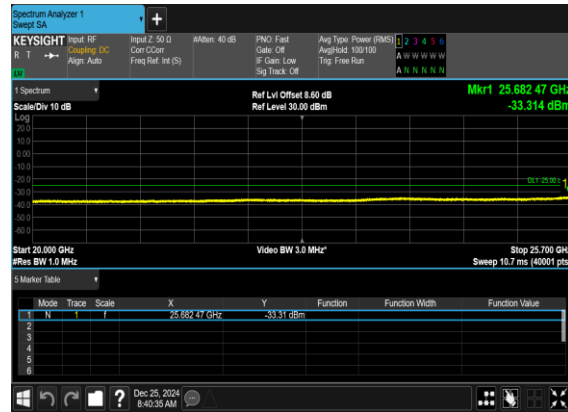

N7(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

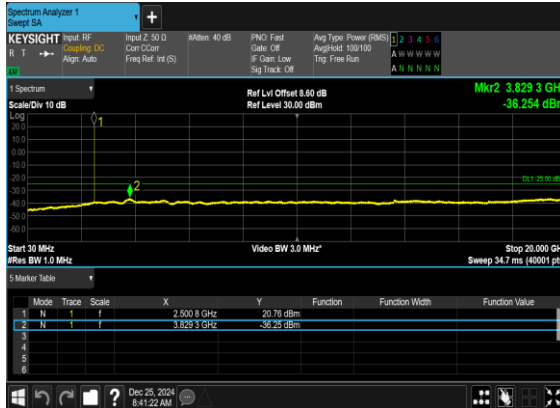


N7(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

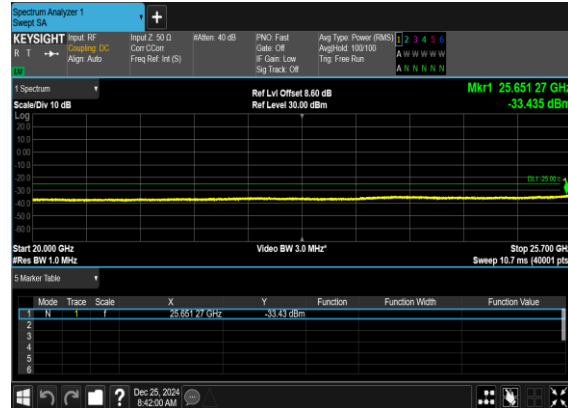





N7(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

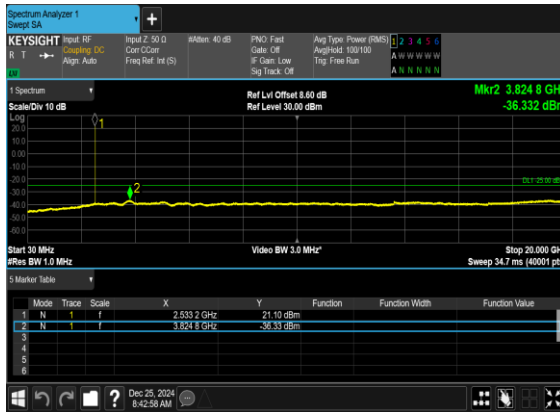


N7(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

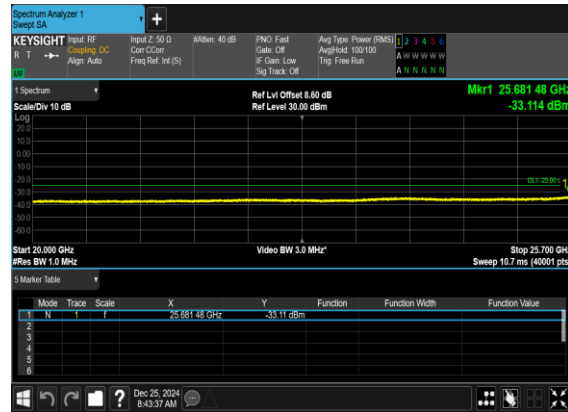

N7(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

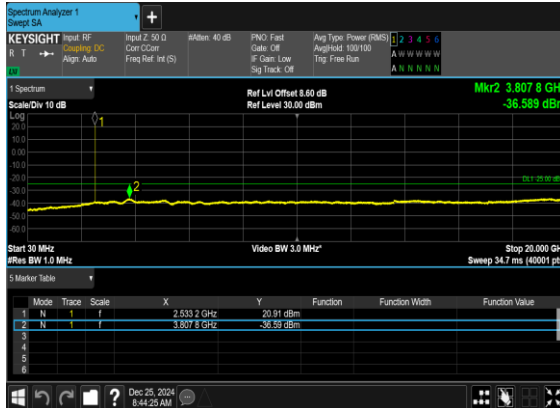


N7(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

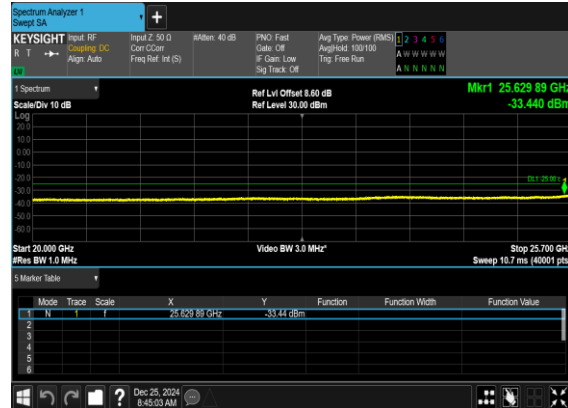





N7(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

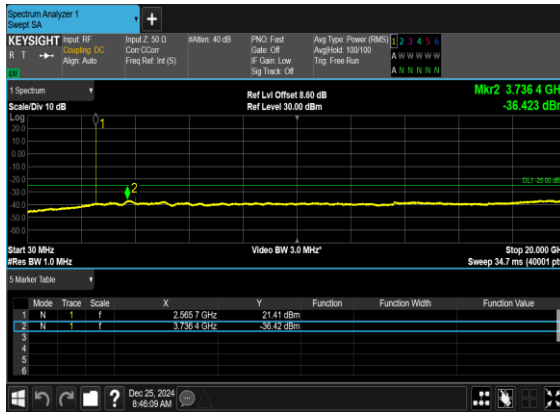


N7(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

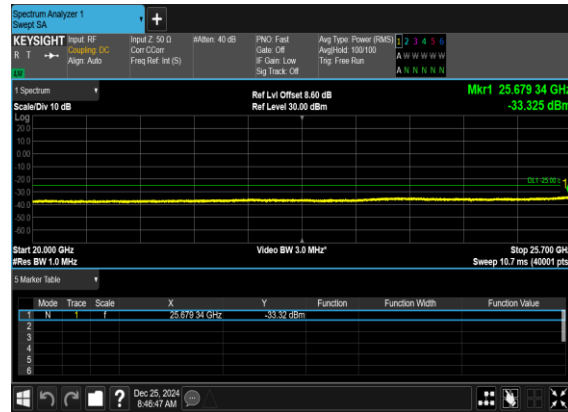

N7(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

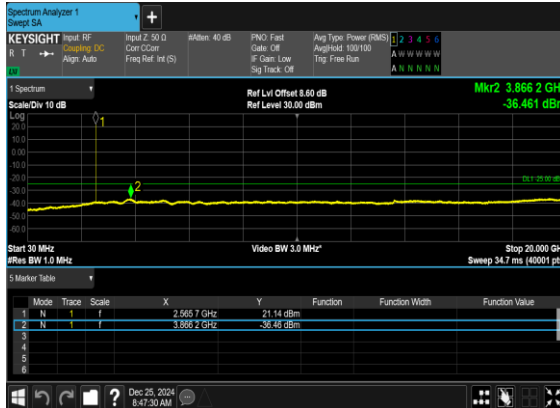

N7(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

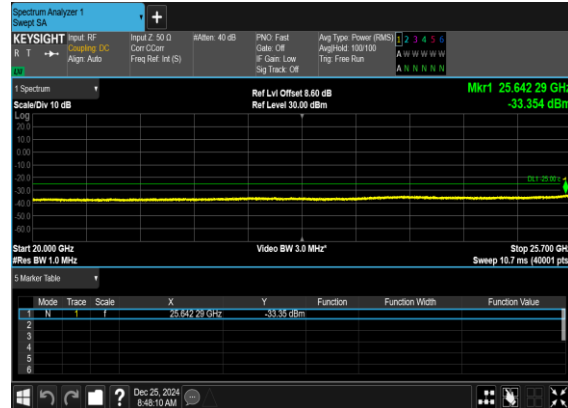



N7(25M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH




N7(25M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH





N7(25M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH



N7(25M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

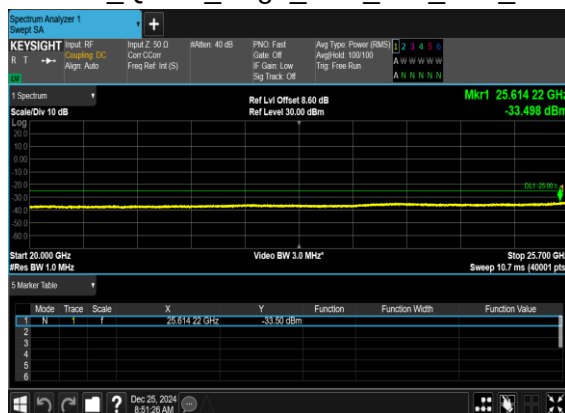

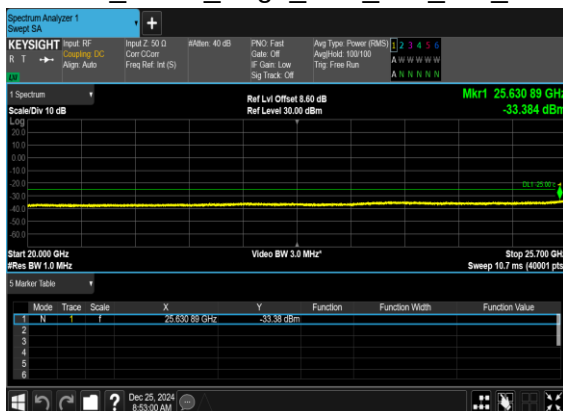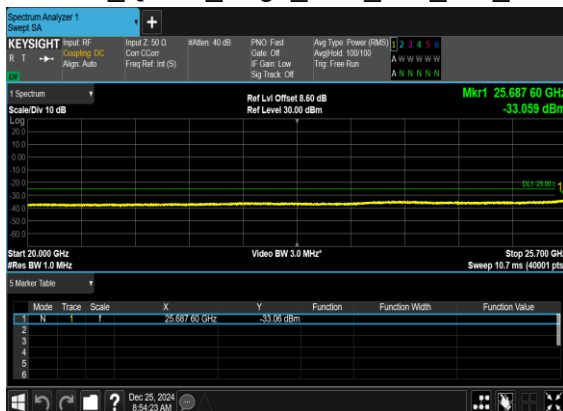
N7(25M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CHN7(25M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CHN7(25M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CHN7(25M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH




N7(25M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH




N7(25M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

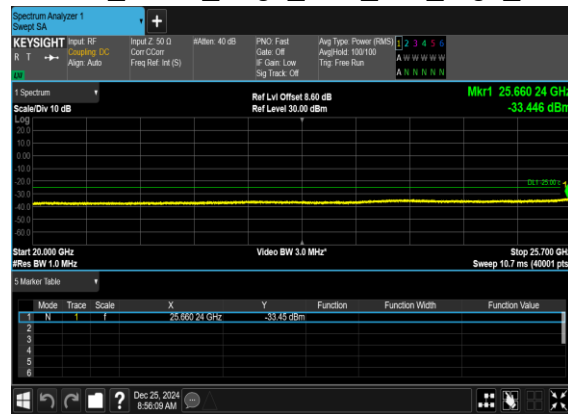

N7(25M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

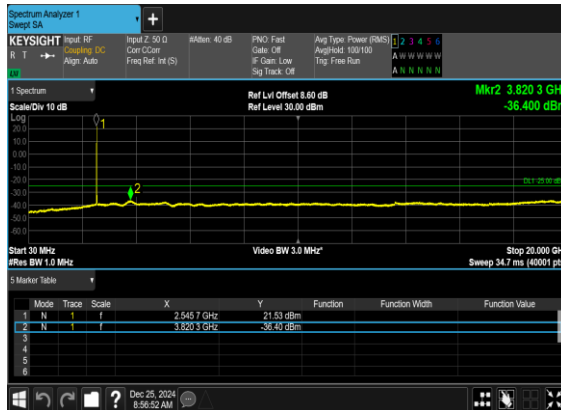


N7(25M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

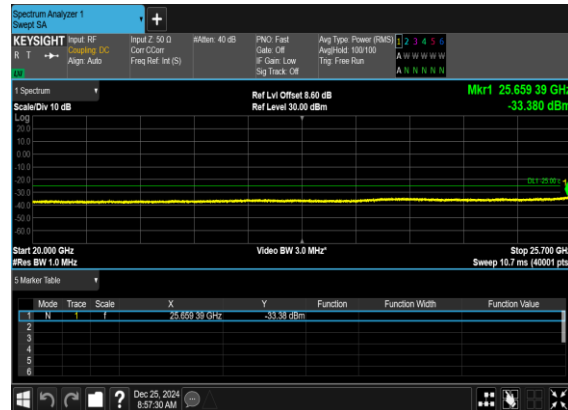





N7(50M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

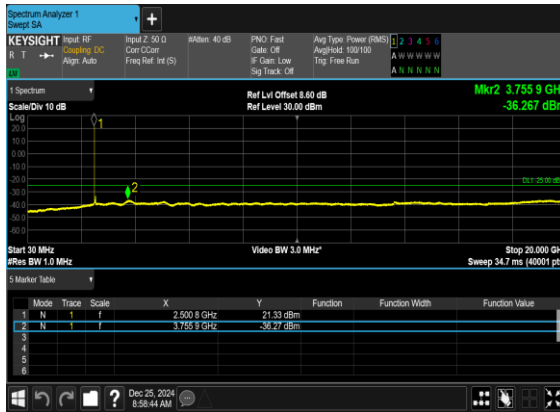

N7(50M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

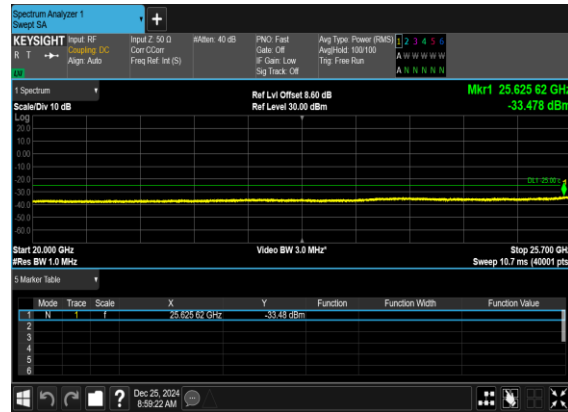

N7(50M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

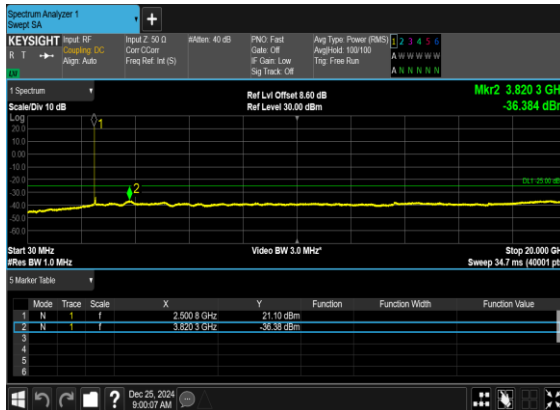

N7(50M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

