

FCC SAR Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT1970-3
FCC ID : IHDT56XT2
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013

The product was received on Dec. 20, 2018 and testing was started from Feb. 22, 2019 and completed on Feb. 28, 2019. We, Sporton International (Kunshan) Inc, would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



Approved by: Mark Qu / Manager



Sporton International (Kunshan) Inc.
No. 1098, Pengxi North Road, Kunshan Economic Development Zone,
Jiangsu Province 215335, China



Table of Contents

1. Statement of Compliance 4
2. Administration Data 5
3. Guidance Applied..... 5
4. Equipment Under Test (EUT) Information 6
4.1 General Information 6
4.2 General LTE SAR Test and Reporting Considerations 8
5. Proximity Sensor Triggering Test.....10
5.1 Proximity sensor triggering distances(Per KDB616217§6.2)10
6. RF Exposure Limits.....23
6.1 Uncontrolled Environment.....23
6.2 Controlled Environment.....23
7. Specific Absorption Rate (SAR).....24
7.1 Introduction24
7.2 SAR Definition.....24
8. System Description and Setup25
8.1 E-Field Probe26
8.2 Data Acquisition Electronics (DAE)26
8.3 Phantom.....27
8.4 Device Holder.....28
9. Measurement Procedures29
9.1 Spatial Peak SAR Evaluation29
9.2 Power Reference Measurement.....30
9.3 Area Scan30
9.4 Zoom Scan.....31
9.5 Volume Scan Procedures.....31
9.6 Power Drift Monitoring.....31
10. Test Equipment List.....32
11. System Verification33
11.1 Tissue Simulating Liquids33
11.2 Tissue Verification34
11.3 System Performance Check Results35
12. RF Exposure Positions36
12.1 Ear and handset reference point36
12.2 Definition of the cheek position37
12.3 Definition of the tilt position38
12.4 Body Worn Accessory39
12.5 Product Specific 10g SAR Exposure40
12.6 Wireless Router.....40
13. Conducted RF Output Power (Unit: dBm).....41
14. Antenna Location96
15. SAR Test Results98
15.1 Head SAR101
15.2 Hotspot SAR104
15.3 Body Worn Accessory SAR.....108
15.4 Product specific 10g SAR112
15.5 Repeated SAR Measurement114
16. Simultaneous Transmission Analysis115
16.1 Head Exposure Conditions116
16.2 Hotspot Exposure Conditions.....117
16.3 Body-Worn Accessory Exposure Conditions118
16.4 Product specific 10g SAR Exposure Conditions.....119
16.5 SPLSR Evaluation and Analysis.....120
17. Uncertainty Assessment138
18. References139
Appendix A. Plots of System Performance Check
Appendix B. Plots of High SAR Measurement
Appendix C. DASYS Calibration Certificate
Appendix D. Test Setup Photos

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Motorola Mobility LLC, Mobile Cellular Phone, XT1970-3**, are as follows.

Highest 1g SAR Summary						
Equipment Class	Frequency Band		Head (Separation 0mm)	Hotspot (Separation 5mm)	Body-worn (Separation 5mm)	Highest Simultaneous Transmission 1g SAR (W/kg)
			1g SAR (W/kg)			
Licensed	GSM	GSM850	0.41	1.21	1.21	1.59
		GSM1900	<0.10	1.28	1.28	
	WCDMA	Band V	0.31	1.15	1.15	
		Band II	0.13	1.02	1.02	
	LTE	Band 5	0.31	1.06	1.06	
		Band 7	0.18	1.36	1.40	
		Band 41/ Band 38	0.12	1.44	1.44	
DTS	WLAN	2.4GHz WLAN	0.55	0.50	0.50	1.59
NII		5GHz WLAN	0.67	0.50	0.66	1.57
DSS	Bluetooth	2.4GHz Bluetooth	<0.10	<0.10	<0.10	1.57

Highest 10g SAR Summary				
Equipment Class	Frequency Band		Product Specific 10g SAR (W/kg) (Separation 0mm)	Highest Simultaneous Transmission 10g SAR (W/kg)
Licensed	GSM	GSM850	1.77	3.18
		GSM1900	1.98	
	WCDMA	Band V	1.62	
		Band II	1.99	
	LTE	Band 5	2.10	
		Band 7	2.51	
		Band 41/ Band 38	1.91	
NII	WLAN	5GHz WLAN	0.67	3.18
Date of Testing:			2019/2/22~2019/2/28	

Remark: This device supports both LTE B38 and B41. Since the supported frequency span for LTE B38 falls completely within the supports frequency span for LTE B41, both LTE bands have the same target power, and both LTE bands share the same transmission path; therefore, SAR was only assessed for LTE B41.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.



2. Administration Data

Testing Laboratory	
Test Site	Sporton International (Kunshan) Inc.
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone, Jiangsu Province 215335, China TEL : 86-512-57900158 FAX : 86-512-57900958

Applicant	
Company Name	Motorola Mobility LLC
Address	222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

Manufacturer	
Company Name	Motorola Mobility LLC
Address	222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01

4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT1970-3
FCC ID	IHDT56XT2
IMEI Code	SIM1: 352172100024968 SIM2: 352172100024978
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz LTE Band 41: 2537.5 MHz ~ 2652.5 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC : 13.56 MHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA HSPA+(16QAM uplink is not supported) LTE: QPSK, 16QAM, 64QAM WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE NFC
HW Version	DVT2
SW Version	PSA29.76
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype
Remark:	<ol style="list-style-type: none"> This device supports VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation. This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications. This device 2.4GHz WLAN/5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WiFi Direct (GC/GO), and 5.3GHz / 5.5GHz supports WiFi Direct (GC only). This device does not support DTM operation and supports GRPS/EGRPS mode up to multi-slot class 12. When the phone is in talking mode and receiver worked, then power reduction will be implemented immediately at WLAN2.4GHz. The device employs proximity sensors that detect the presence of the user's body at the front or back faces of the device. When front or back body worn condition is detected, GSM850, WCDMA band II/V and LTE band 5/7 reduced power will be active. (P-sensor can't work at detecting presence of the user's body at the four edges of the device.) When hotspot mode is enabled, power reduction will be activated to limit the maximum power of GSM850/1900, WCDMA band II/V and LTE band 5/7/38/41. This device hotspot reduced power and P-sensor reduced power level are the same for GSM850, WCDMA Band V and LTE Band 5. And for other Bands are different.



9. For P-sensor reduced power level is higher than hotspot reduced power for WCDMA band II and LTE band 7, so for front/back P-sensor SAR can represent conservatively for front/back hotspot SAR.
10. For full power level is higher than hotspot reduced power for GSM1900, and LTE band 38/41, so for front/back full power SAR can represent conservatively for front/back hotspot SAR.
11. P-sensor can detect handheld state, WCDMA band II and LTE band 7 for front/back/bottom sides of product specific 10g SAR condition reduced powers will be active.
12. This device has two WWAN transmitter antennas. WWAN antenna 1 is located at the right of bottom edge of the device and WWAN antenna 2 is located at the left side of bottom edge of the device which can refer to antenna location chapter. WWAN antenna 1 frequency bands include GSM850/1900, WCDMA Band II/V and LTE Band 5, WWAN antenna 2 frequency bands include LTE Band 7/38/41.
13. For dual SIM card mobile has two SIM slots and supports dual SIM dual standby. The WWAN radio transmission will be enabled by either one SIM at a time (single active). After pre-scan two SIM cards power, we found test result of the SIM1 was the worse, so we chose SIM1 slot to perform all tests.



4.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																															
FCC ID	IHDT56XT2																																																														
Equipment Name	Mobile Cellular Phone																																																														
Operating Frequency Range of each LTE transmission band	LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz LTE Band 41: 2537.5 MHz ~ 2652.5 MHz																																																														
Channel Bandwidth	LTE Band 5: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz																																																														
Uplink Modulations Used	QPSK / 16QAM / 64QAM																																																														
LTE Voice / Data requirements	Voice and Data																																																														
LTE Release Version	R12, Cat6																																																														
CA Support	Supported, Downlink only																																																														
LTE MPR permanently built-in by design	<p>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>64 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6" style="text-align: center;">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table>	Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																								
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																									
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																								
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																								
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																								
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																								
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																								
256 QAM	≥ 1						≤ 5																																																								
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																														
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																														
Power reduction applied to satisfy SAR compliance	<p>Yes</p> <ol style="list-style-type: none"> The device employs proximity sensors that detect the presence of the user's body at the front or back faces of the device. When front or back body worn condition is detected, LTE band 5/7 reduced power will be active. (P-sensor can't work at detecting presence of the user's body at the four edges of the device.) When hotspot mode is enabled, power reduction will be activated to limit the maximum power of LTE band 5/7/38/41. P-sensor can detect handheld state, for front/back/bottom sides of product specific 10g SAR condition LTE band 7 reduced powers will be active. 																																																														
LTE Carrier Aggregation Combinations	Intra-Band possible combinations and the detail power verification please referred to section 13.																																																														
LTE Carrier Aggregation Additional Information	This device supports maximum of 2 carriers in the downlink. Additional following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.																																																														




Transmission (H, M, L) channel numbers and frequencies in each LTE band								
LTE Band 5								
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5
H	20643	848.3	20635	847.5	20625	846.5	20600	844
LTE Band 7								
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510
M	21100	2535	21100	2535	21100	2535	21100	2535
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560
LTE Band 38								
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580
M	38000	2595	38000	2595	38000	2595	38000	2595
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610
LTE Band 41								
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	40065	2537.5	40090	2540	40115	2542.5	40140	2545
L	40385	2569.5	40390	2570	40395	2570.5	40400	2571
M								
H	40705	2601.5	40690	2600	40685	2599.5	40670	2598
M								
H	41215	2652.5	41190	2650	41165	2647.5	41140	2645

5. Proximity Sensor Triggering Test

5.1 Proximity sensor triggering distances(Per KDB616217§6.2)

1. Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed and the tissue-equivalent medium for highest frequency (2600MHz) and lowest (850MHz) frequency was used for proximity sensor triggering testing.
2. Capacitive proximity sensor placed coincident with antenna elements at the bottom end of the phone are utilized to determine when the device comes in proximity of the user's body at the front or back side surface of the device. There is no need to do sensor coverage testing for the proximity sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the proximity sensor entirely covers the antenna.
3. When the sensor is active, GSM850, WCDMA band II/V and LTE band 5/7 reduced power will be active.
4. The sensors used to detect the proximity of the user's body at the front or back side surface of the device use a detection threshold distance. The data shown in the sections below shows the distance(s).
5. P-sensor can detect handheld state, WCDMA band II and LTE band 7 for front/back/bottom sides of product specific 10g SAR condition reduced powers will be active.

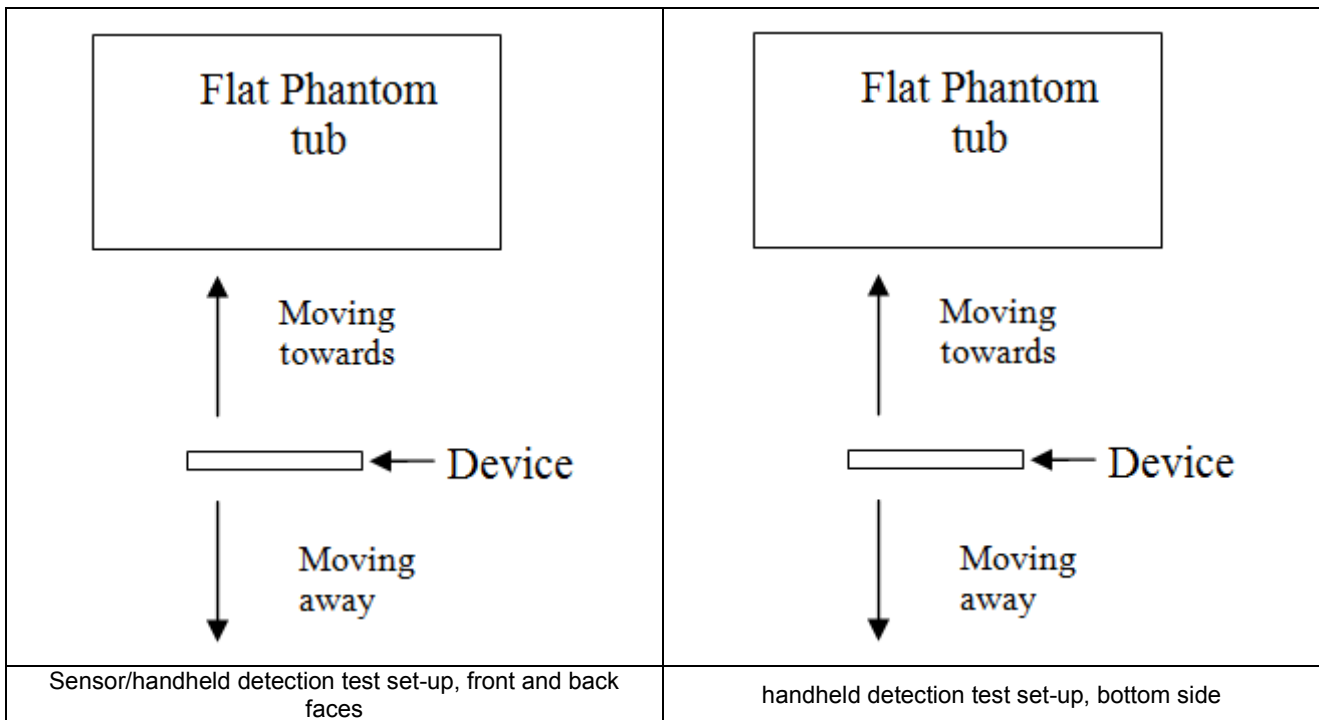


<P-Sensor>

Proximity Sensor Triggering Distance (mm)				
Position	Front		Back	
	Moving towards	Moving away	Moving towards	Moving away
Minimum	18	21	22	26

TX. Band	Proximity Sensor Triggering Power (dBm)		
	Full	Reduced	Power Reduction (dB)
	Max. Tune Up Limit (dBm)	Max. Tune Up Limit (dBm)	
GSM850 GPRS 3Tx slots	30	28	2.0
WCDMA Band II	24	21.5	2.5
WCDMA Band V	24	22.5	1.5
LTE Band 5	24	22.5	1.5
LTE Band 7	24	22.5	1.5




Proximity Sensor Triggering Distance (mm) and Triggering Power (dBm)																								
Front / Body-worn (moving toward phantom)																								
Distance	50	47	44	41	38	35	32	29	26	23	22	21	20	19	18	17	16	15	14	11	8	5	2	0
GSM850 GPRS 3Tx slots	30	30	30	30	30	30	30	30	30	30	30	30	30	30	28	28	28	28	28	28	28	28	28	28
WCDMA Band II	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5
WCDMA Band V	24	24	24	24	24	24	24	24	24	24	24	24	24	24	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
LTE Band5	24	24	24	24	24	24	24	24	24	24	24	24	24	24	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
LTE Band7	24	24	24	24	24	24	24	24	24	24	24	24	24	24	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5

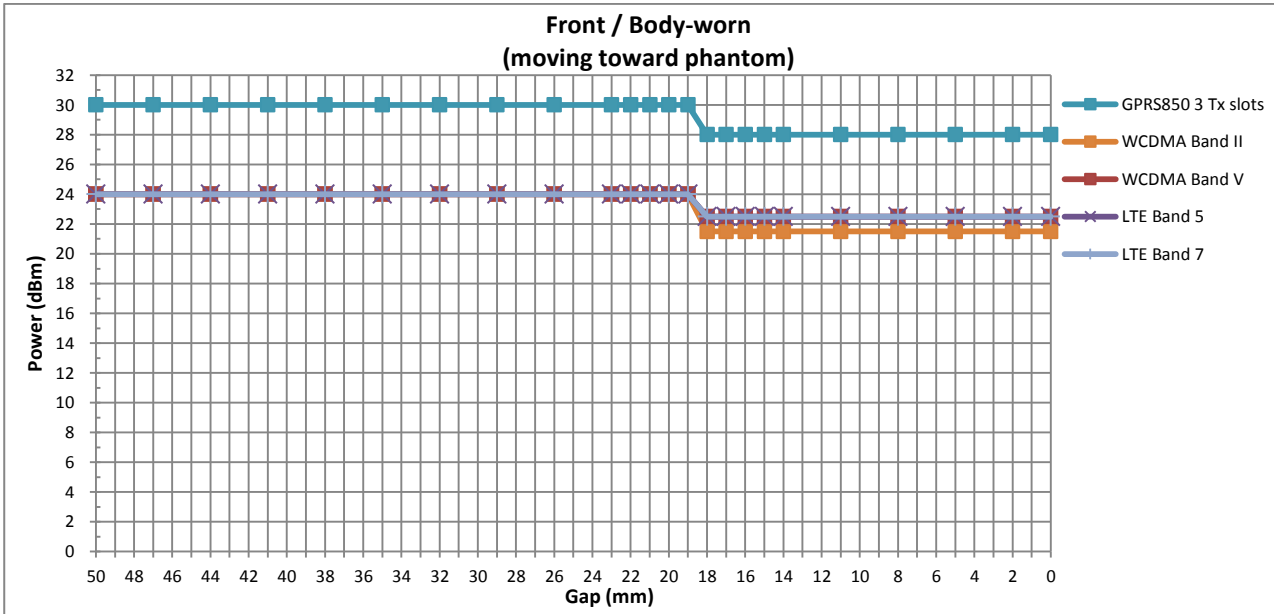





Proximity Sensor Triggering Distance (mm) and Triggering Power (dBm)																									
Front / Body-worn (moving away phantom)																									
Distance	0	3	6	9	12	15	16	17	18	19	20	21	22	23	24	25	26	29	32	35	38	41	44	47	50
GSM850 GPRS 3Tx slots	28	28	28	28	28	28	28	28	28	28	28	28	30	30	30	30	30	30	30	30	30	30	30	30	30
WCDMA Band II	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	24	24	24	24	24	24	24	24	24	24	24	24	24
WCDMA Band V	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	24	24	24	24	24	24	24	24	24	24	24	24	24
LTE Band 5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	24	24	24	24	24	24	24	24	24	24	24	24	24
LTE Band 7	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	24	24	24	24	24	24	24	24	24	24	24	24	24

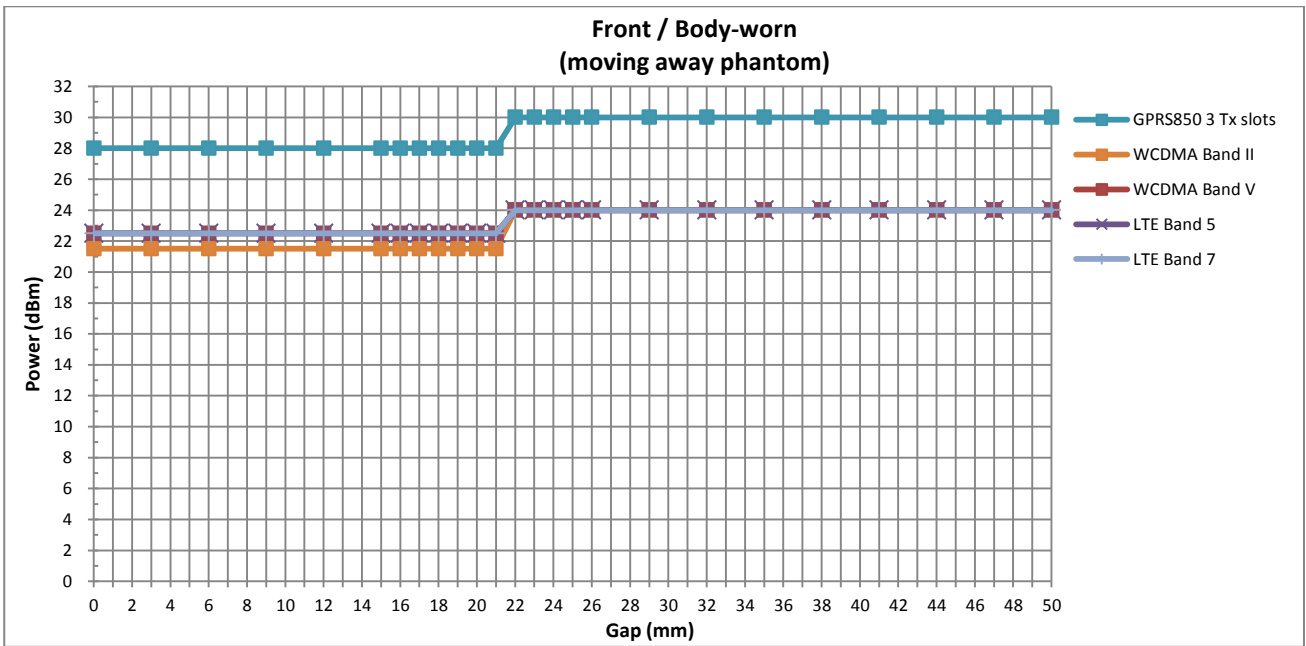

Proximity Sensor Triggering Distance (mm) and Triggering Power (dBm)																									
Back / Body-worn (moving toward phantom)																									
Distance	50	47	44	41	38	35	32	29	28	27	26	25	24	23	22	21	20	19	18	15	12	9	6	3	0
GSM850 GPRS 3Tx slots	30	30	30	30	30	30	30	30	30	30	30	30	30	30	28	28	28	28	28	28	28	28	28	28	28
WCDMA Band II	24	24	24	24	24	24	24	24	24	24	24	24	24	24	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5
WCDMA Band V	24	24	24	24	24	24	24	24	24	24	24	24	24	24	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
LTE Band5	24	24	24	24	24	24	24	24	24	24	24	24	24	24	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
LTE Band7	24	24	24	24	24	24	24	24	24	24	24	24	24	24	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5

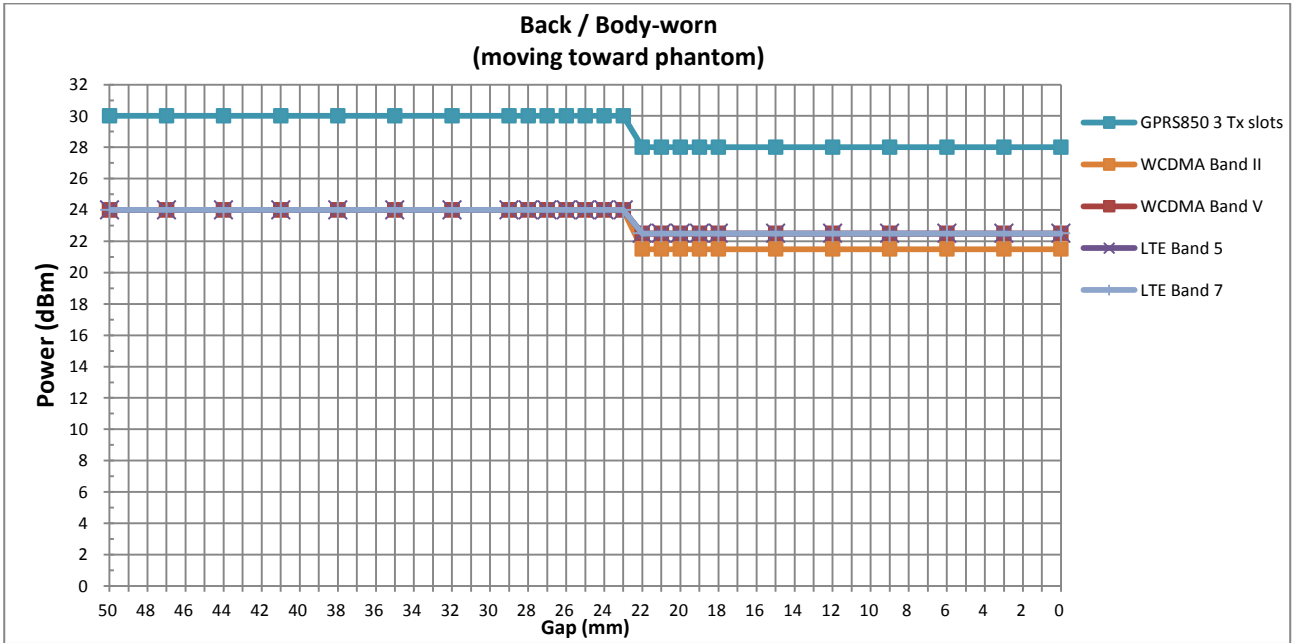

Proximity Sensor Triggering Distance (mm) and Triggering Power (dBm)																									
Back / Body-worn (moving away phantom)																									
Distance	0	3	6	9	12	15	18	21	22	23	24	25	26	27	28	29	30	31	34	37	40	43	46	49	50
GSM850 GPRS 3Tx slots	28	28	28	28	28	28	28	28	28	28	28	28	28	30	30	30	30	30	30	30	30	30	30	30	30
WCDMA Band II	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	24	24	24	24	24	24	24	24	24	24	24	24
WCDMA Band V	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	24	24	24	24	24	24	24	24	24	24	24	24
LTE Band 5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	24	24	24	24	24	24	24	24	24	24	24	24
LTE Band 7	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	24	24	24	24	24	24	24	24	24	24	24	24

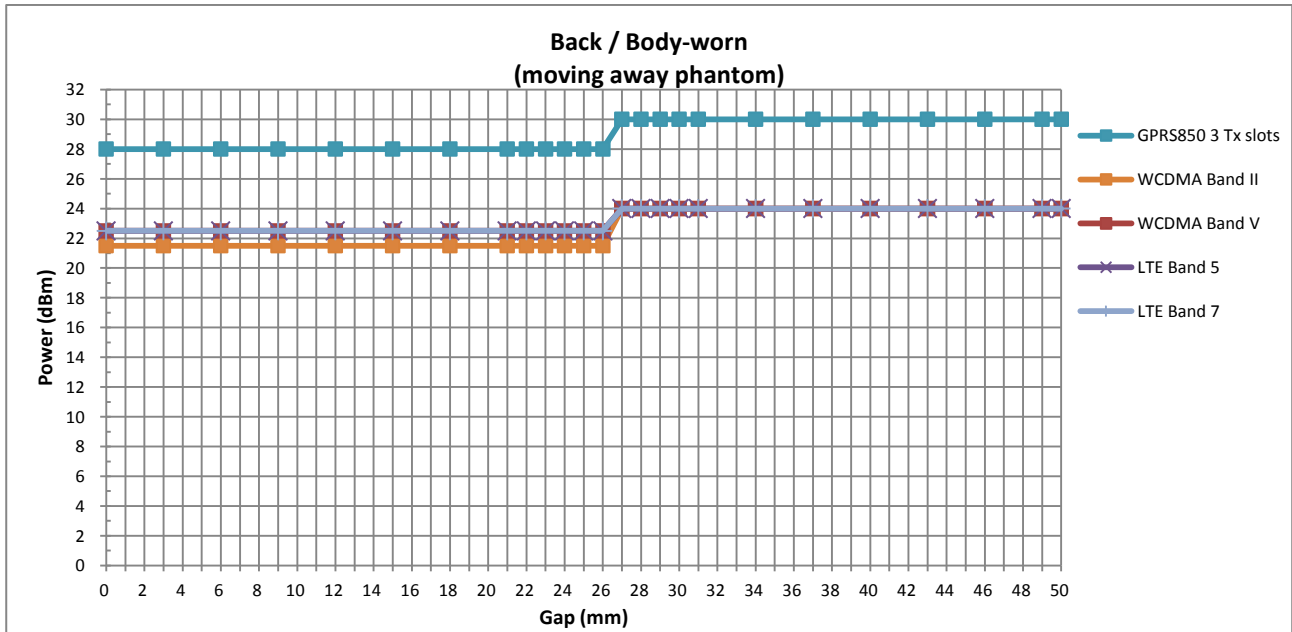


<Handheld>

Handheld Triggering Distance (mm)						
Position	Front		Back		Bottom Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	8	12	10	13	9	11

TX. Band	Handheld Triggering Power (dBm)		
	Full	Reduced	Power Reduction (dB)
	Max. Tune Up Limit (dBm)	Max. Tune Up Limit (dBm)	
WCDMA Band II	24	23	1
LTE Band 7	24	22	2




Proximity Sensor Triggering Distance (mm) and Triggering Power (dBm)																									
Front / Handheld (moving toward phantom)																									
Distance	50	47	44	41	38	35	32	29	26	23	20	17	14	13	12	11	10	9	8	7	6	5	4	3	0
WCDMA Band II	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	23	23	23	23	23	23	23
LTE Band7	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	22	22	22	22	22	22	22

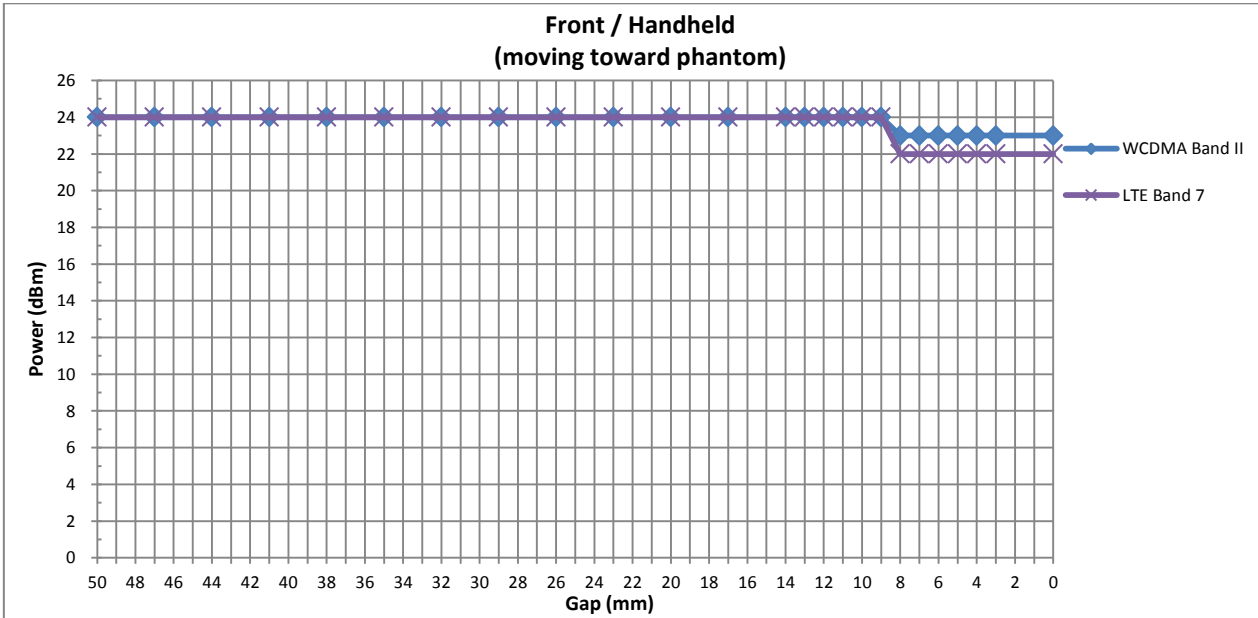




Proximity Sensor Triggering Distance (mm) and Triggering Power (dBm)																									
Front / Handheld (moving away phantom)																									
Distance	0	3	6	7	8	9	10	11	12	13	14	15	16	17	20	23	26	29	32	35	38	41	44	47	50
WCDMA Band II	23	23	23	23	23	23	23	23	23	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24
LTE Band 7	22	22	22	22	22	22	22	22	22	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24

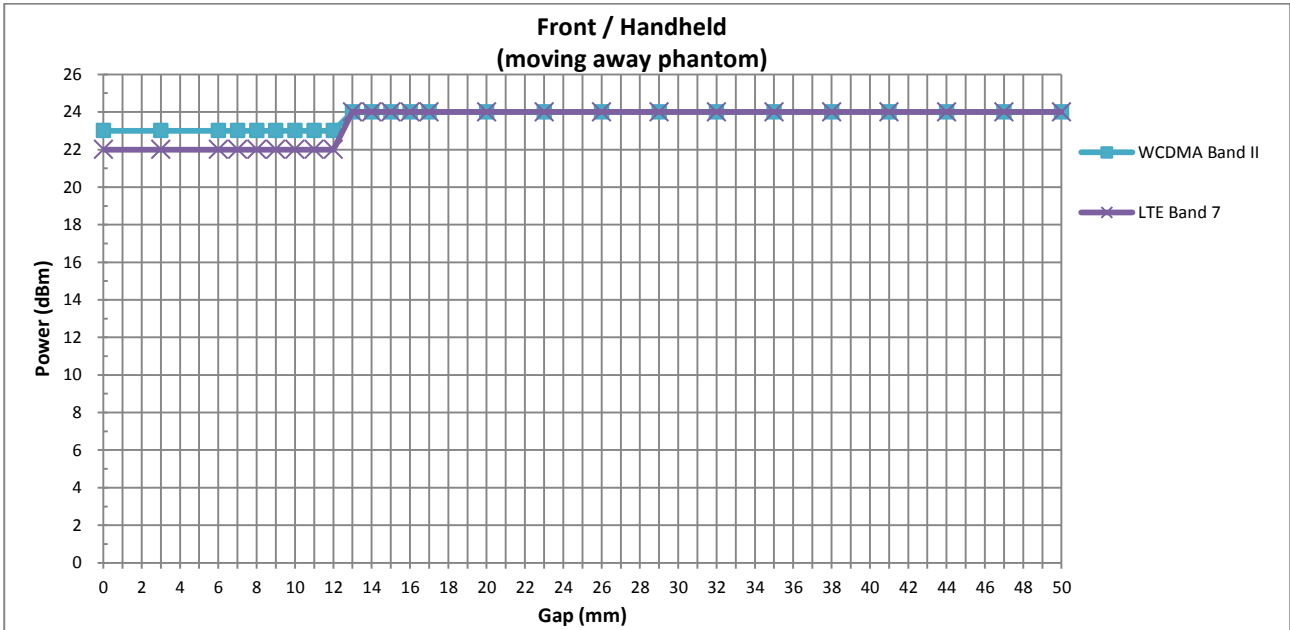




Handheld Triggering Distance (mm) and Triggering Power (dBm)																									
Back / Handheld (moving toward phantom)																									
Distance	50	47	44	41	38	35	32	29	26	23	20	17	16	15	14	13	12	11	10	9	8	7	6	3	0
WCDMA Band II	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	23	23	23	23	23	23	23
LTE Band7	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	22	22	22	22	22	22	22

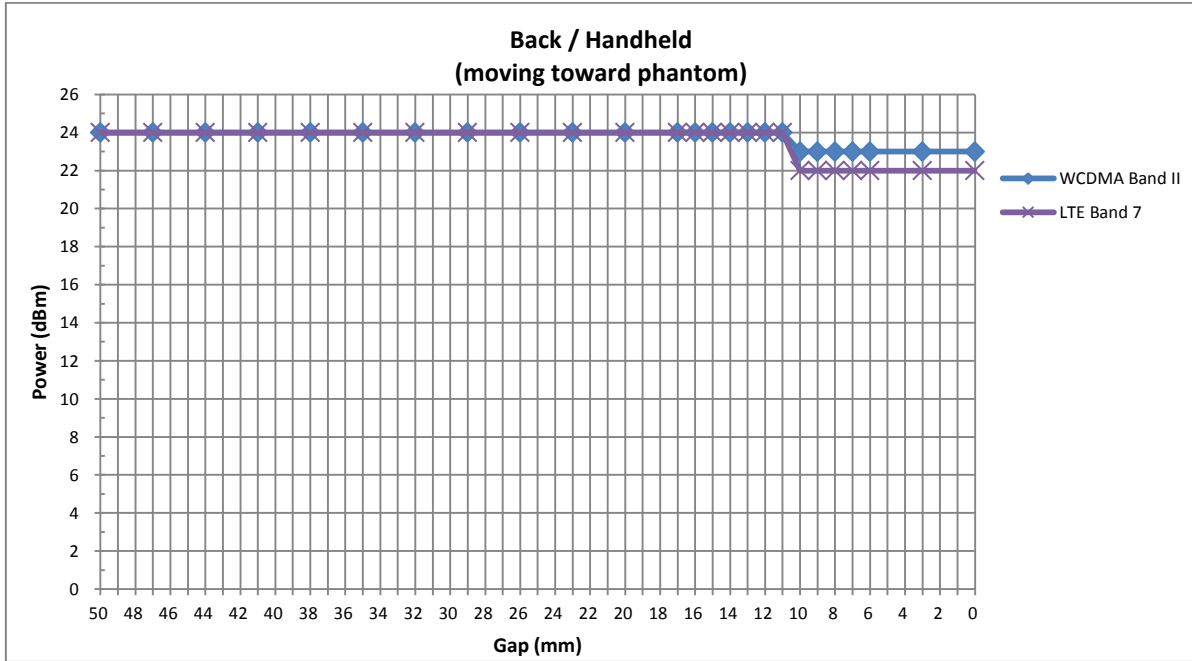




Handheld Triggering Distance (mm) and Triggering Power (dBm)																								
Back / Handheld (moving away phantom)																								
Distance	0	3	6	9	10	11	12	13	14	15	16	17	18	21	24	27	30	33	36	39	42	45	48	50
WCDMA Band II	23	23	23	23	23	23	23	23	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24
LTE Band7	22	22	22	22	22	22	22	22	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24

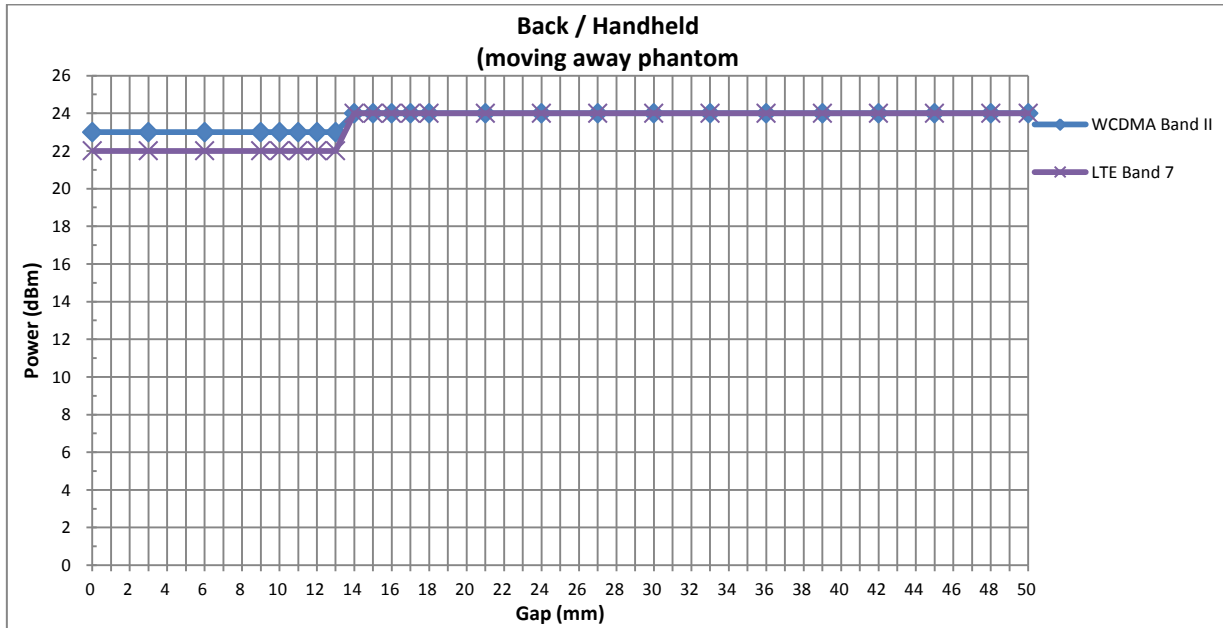




Handheld Triggering Distance (mm) and Triggering Power (dBm)																								
Bottom Side / Handheld (moving toward phantom)																								
Distance	50	47	44	41	38	35	32	29	26	23	20	17	14	13	12	11	10	9	8	7	6	5	2	0
WCDMA Band II	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	23	23	23	23	23	23	23
LTE Band7	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	22	22	22	22	22	22	22

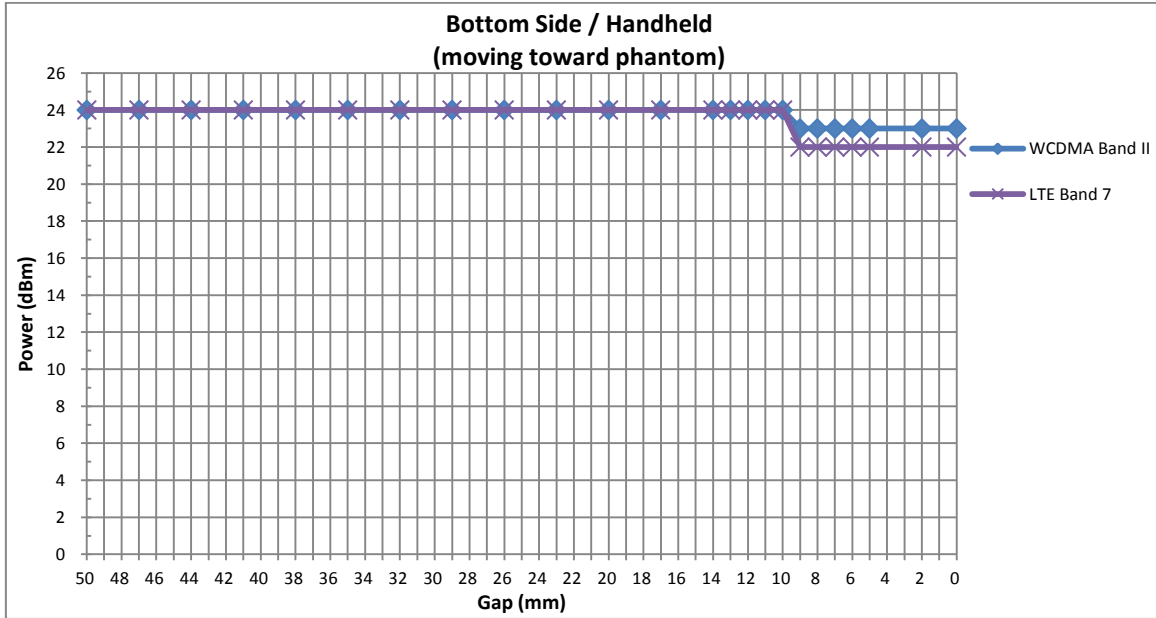

Handheld Triggering Distance (mm) and Triggering Power (dBm)																										
Bottom Side / Handheld (moving away phantom)																										
Distance	0	3	6	7	8	9	10	11	12	13	14	15	16	19	22	25	28	31	34	37	40	43	46	49	50	
WCDMA Band II	23	23	23	23	23	23	23	23	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24
LTE Band7	22	22	22	22	22	22	22	22	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24

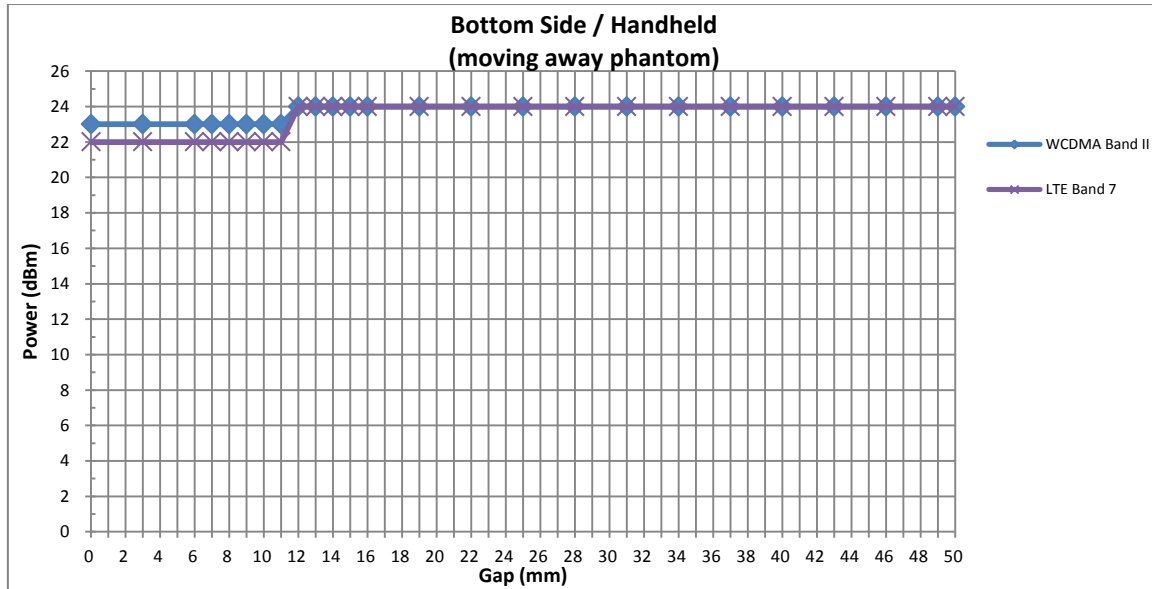

6. RF Exposure Limits

6.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

6.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

7. Specific Absorption Rate (SAR)

7.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

7.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

8. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

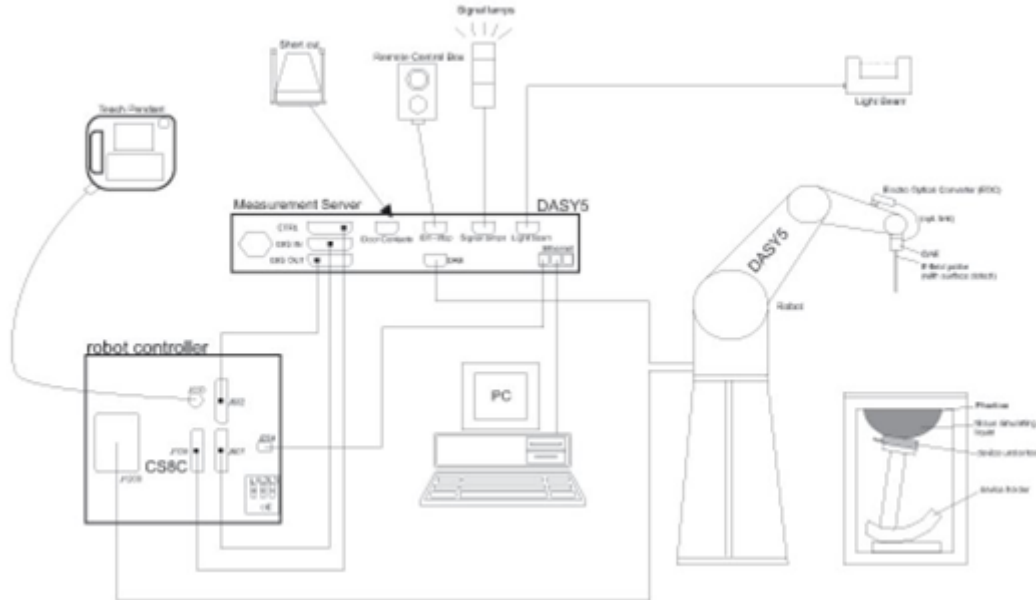


- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

8.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ±0.2 dB (30 MHz – 6 GHz)	
Directivity	±0.3 dB in TSL (rotation around probe axis) ±0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 µW/g – >100 mW/g Linearity: ±0.2 dB (noise: typically <1 µW/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

8.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Photo of DAE


8.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

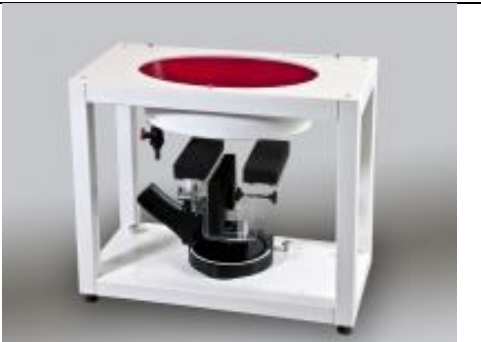Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

8.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

9. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

9.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASYS measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



10. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	835MHz System Validation Kit	D835V2	4d151	2018/3/26	2019/3/25
SPEAG	1900MHz System Validation Kit	D1900V2	5d170	2018/3/25	2019/3/24
SPEAG	2450MHz System Validation Kit	D2450V2	908	2018/3/22	2019/3/21
SPEAG	2600MHz System Validation Kit	D2600V2	1061	2018/12/7	2019/12/6
SPEAG	5000MHz System Validation Kit	D5GHzV2	1006	2018/9/27	2019/9/26
SPEAG	Data Acquisition Electronics	DAE4	1338	2018/12/3	2019/12/2
SPEAG	Data Acquisition Electronics	DAE4	1279	2018/10/22	2019/10/21
SPEAG	Dosimetric E-Field Probe	EX3DV4	3843	2018/9/27	2019/9/26
SPEAG	Dosimetric E-Field Probe	EX3DV4	3857	2018/5/31	2019/5/30
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1754	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1839	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Anritsu	Radio communication analyzer	MT8820C	6201274349	2018/8/16	2019/8/15
Agilent	Wireless Communication Test Set	E5515C	MY52102706	2018/4/17	2019/4/16
Agilent	ENA Series Network Analyzer	E5071C	MY46111157	2018/4/17	2019/4/16
SPEAG	Dielectric Probe Kit	DAK-3.5	1138	2018/11/20	2019/11/19
Anritsu	Vector Signal Generator	MG3710A	6201682672	2019/1/14	2020/1/13
R&S	Power Meter	NRVD	102081	2018/8/20	2019/8/19
R&S	Power Sensor	NRV-Z5	100538	2018/8/20	2019/8/19
R&S	Power Sensor	NRV-Z5	100539	2018/8/20	2019/8/19
R&S	CBT BLUETOOTH TESTER	CBT	101641	2019/1/14	2020/1/13
EXA	Spectrum Analyzer	FSV7	101631	2019/1/14	2020/1/13
Testo	Hygrometer	608-H1	1241332126	2018/8/21	2019/8/20
FLUKE	DIGITAC THERMOMETER	51II	97240029	2018/8/8	2019/8/7
ARRA	Power Divider	A3200-2	N/A	Note	
MCL	Attenuation1	BW-S10W5+	N/A	Note	
MCL	Attenuation2	BW-S10W5+	N/A	Note	
MCL	Attenuation3	BW-S10W5+	N/A	Note	
Agilent	Dual Directional Coupler	778D	20500	Note	
Agilent	Dual Directional Coupler	11691D	MY48151020	Note	
BONN	POWER AMPLIFIER	BLMA 0830-3	087193A	Note	
BONN	POWER AMPLIFIER	BLMA 2060-2	087193B	Note	

Note: Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check

11. System Verification

11.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 11.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 11.2.

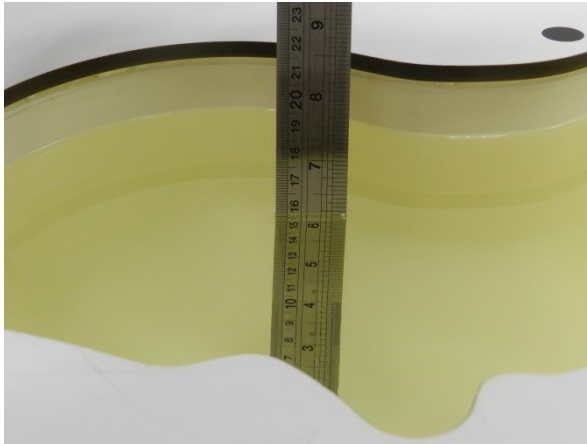


Fig 11.1 Photo of Liquid Height for Head SAR

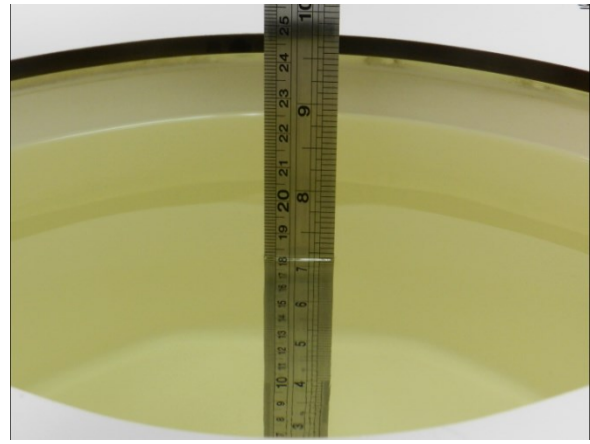


Fig 11.2 Photo of Liquid Height for Body SAR

11.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
835	Head	22.5	0.910	41.571	0.90	41.50	1.11	0.17	±5	2019.2.24
1900	Head	22.7	1.439	38.966	1.40	40.00	2.79	-2.59	±5	2019.2.26
2450	Head	22.8	1.859	38.887	1.80	39.20	3.28	-0.80	±5	2019.2.27
2600	Head	22.6	1.998	38.452	1.96	39.00	1.94	-1.41	±5	2019.2.28
5250	Head	22.8	4.626	36.401	4.71	35.90	-1.78	1.40	±5	2019.2.23
5600	Head	22.7	4.983	35.902	5.07	35.50	-1.72	1.13	±5	2019.2.23
5750	Head	22.6	5.140	35.691	5.22	35.40	-1.53	0.82	±5	2019.2.23
835	Body	22.6	0.998	54.644	0.97	55.20	2.89	-1.01	±5	2019.2.25
1900	Body	22.8	1.553	52.672	1.52	53.30	2.17	-1.18	±5	2019.2.26
2450	Body	22.6	2.007	53.183	1.95	52.70	2.92	0.92	±5	2019.2.23
2600	Body	22.7	2.180	51.733	2.16	52.50	0.93	-1.46	±5	2019.2.25
5250	Body	22.9	5.468	47.671	5.36	48.90	2.01	-2.51	±5	2019.2.22
5600	Body	22.7	5.920	47.087	5.77	48.50	2.60	-2.91	±5	2019.2.22
5750	Body	22.8	6.124	46.854	5.94	48.30	3.10	-2.99	±5	2019.2.22

11.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

<1g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2019.2.24	835	Head	250	4d151	3843	1338	2.36	9.66	9.44	-2.28
2019.2.26	1900	Head	250	5d170	3843	1338	9.22	39.90	36.88	-7.57
2019.2.27	2450	Head	250	908	3843	1338	12.30	51.80	49.20	-5.02
2019.2.28	2600	Head	250	1061	3843	1338	13.70	57.70	54.80	-5.03
2019.2.23	5200	Head	100	1006	3857	1279	7.95	80.70	79.50	-1.49
2019.2.23	5600	Head	100	1006	3857	1279	7.76	83.30	77.60	-6.84
2019.2.23	5750	Head	100	1006	3857	1279	7.61	80.40	76.10	-5.35
2019.2.25	835	Body	250	4d151	3843	1338	2.35	9.58	9.40	-1.88
2019.2.26	1900	Body	250	5d170	3843	1338	9.61	40.70	38.44	-5.55
2019.2.23	2450	Body	250	908	3843	1338	13.20	50.70	52.80	4.14
2019.2.25	2600	Body	250	1061	3843	1338	14.10	54.20	56.40	4.06
2019.2.22	5200	Body	100	1006	3857	1279	7.61	78.30	76.10	-2.81
2019.2.22	5600	Body	100	1006	3857	1279	7.62	81.00	76.20	-5.93
2019.2.22	5750	Body	100	1006	3857	1279	7.33	77.40	73.30	-5.30

<10g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2019.2.25	835	Body	250	4d151	3843	1338	1.61	6.31	6.44	2.06
2019.2.26	1900	Body	250	5d170	3843	1338	4.91	20.90	19.64	-6.03
2019.2.25	2600	Body	250	1061	3843	1338	6.42	24.30	25.68	5.68
2019.2.22	5250	Body	100	1006	3857	1279	2.15	21.70	21.50	-0.92
2019.2.22	5600	Body	100	1006	3857	1279	2.11	22.50	21.10	-6.22

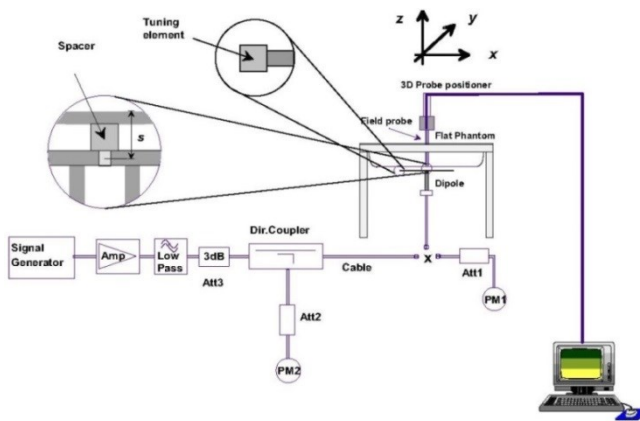


Fig 11.3.1 System Performance Check Setup

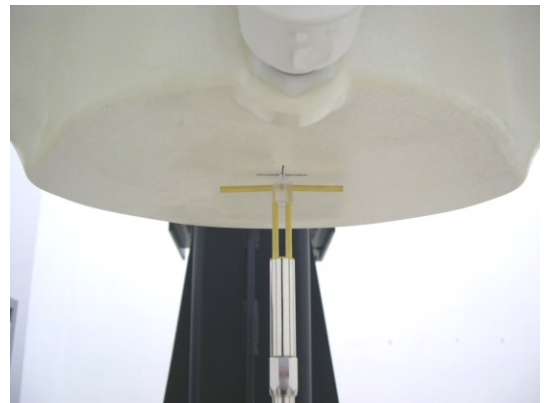


Fig 11.3.2 Setup Photo

12. RF Exposure Positions

12.1 Ear and handset reference point

Figure 12.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled "M," the left ear reference point (ERP) is marked "LE," and the right ERP is marked "RE." Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 12.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 12.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 12.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

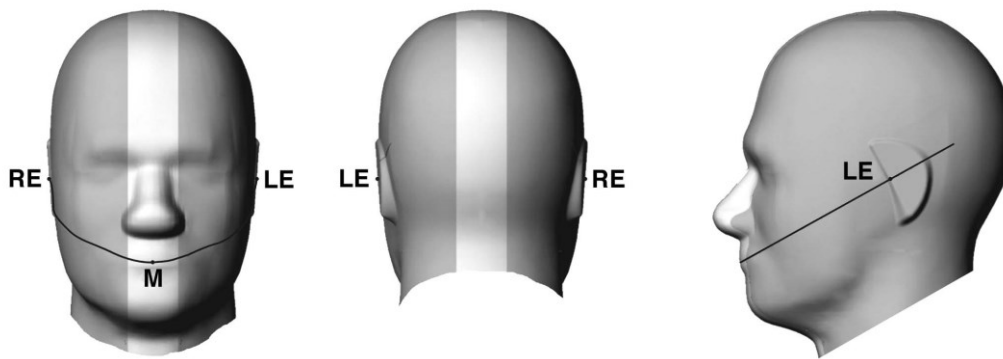


Fig 12.1.1 Front, back, and side views of SAM twin phantom

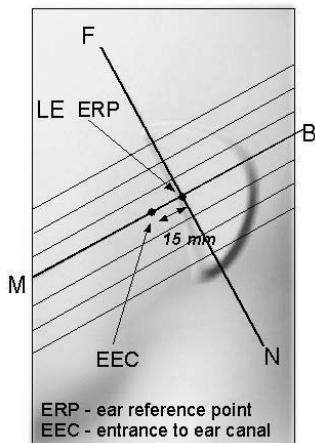


Fig 12.1.2 Close-up side view of phantom showing the ear region.

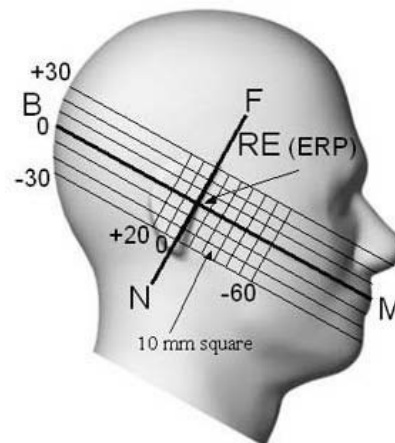


Fig 12.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

12.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 12.2.1 and Figure 12.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 12.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 12.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 12.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 12.2.3. The actual rotation angles should be documented in the test report.

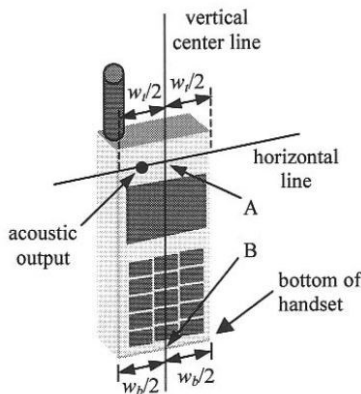


Fig 12.2.1 Handset vertical and horizontal reference lines—“fixed case”

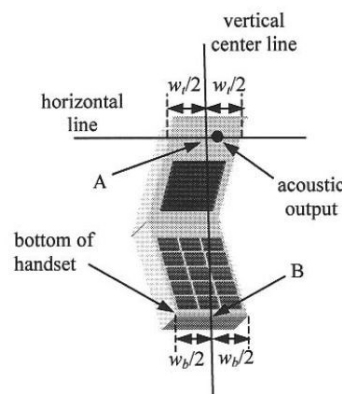


Fig 12.2.2 Handset vertical and horizontal reference lines—“clam-shell case”

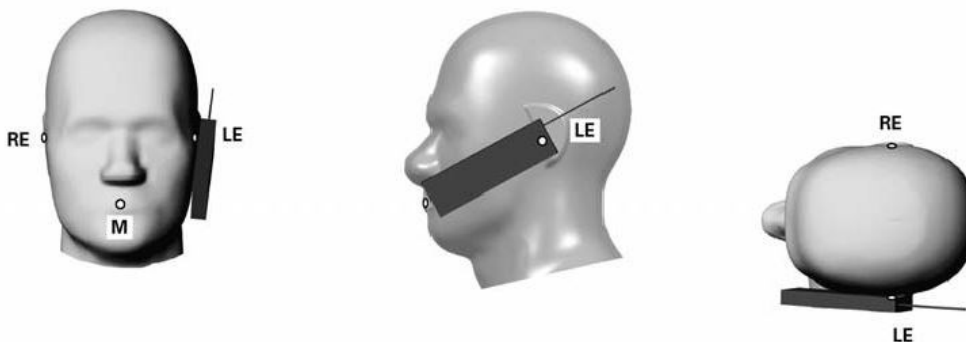


Fig 12.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

12.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 12.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

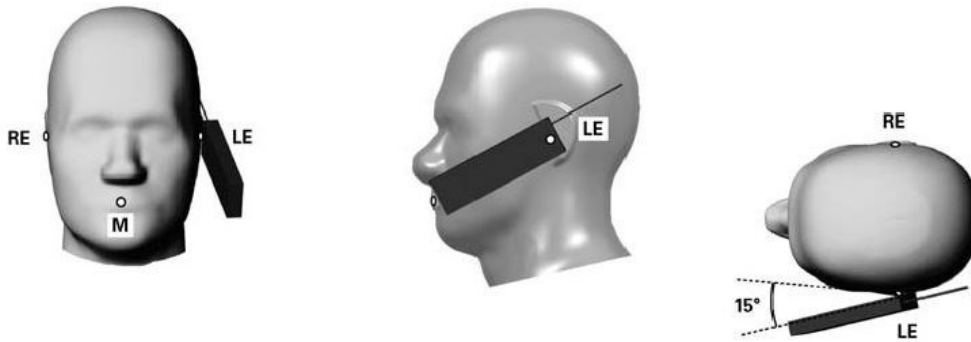


Fig 12.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

12.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 12.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

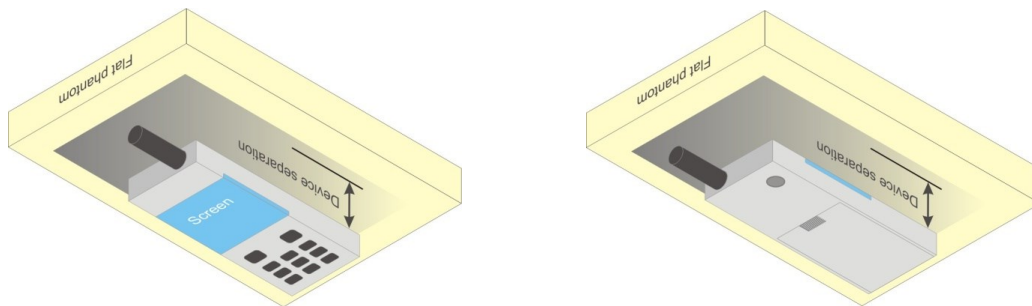


Fig 12.4 Body Worn Position



12.5 Product Specific 10g SAR Exposure

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.6 The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

12.6 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9$ cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

13. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS 3Tx slots for GSM850/GSM1900 are considered as the primary mode.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.
4. Power reduction which is triggered by hotspot mode are implemented in GSM850/1900 band, for SAR testing EUT was set in reduced power mode and GPRS 3 Tx slots due to its highest frame-average power.
5. Power reduction which is triggered by p-sensor on are implemented in GSM850 band, for SAR testing EUT was set in reduced power mode and GPRS 3 Tx slots due to its highest frame-average power.

<Full Power Mode>

GSM850 Tx Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	32.16	32.26	32.24	33.50	23.16	23.26	23.24	24.50
GPRS 1 Tx slot	32.15	32.26	32.25	33.50	23.15	23.26	23.25	24.50
GPRS 2 Tx slots	30.68	30.73	30.79	31.00	24.68	24.73	24.79	25.00
GPRS 3 Tx slots	29.12	29.35	29.38	30.00	24.86	25.09	25.12	25.74
GPRS 4 Tx slots	27.45	27.59	27.35	28.00	24.45	24.59	24.35	25.00
EDGE 1 Tx slot	26.53	26.55	26.53	27.50	17.53	17.55	17.53	18.50
EDGE 2 Tx slots	24.50	24.64	24.53	26.50	18.50	18.64	18.53	20.50
EDGE 3 Tx slots	23.15	23.20	23.14	24.00	18.89	18.94	18.88	19.74
EDGE 4 Tx slots	21.44	21.47	21.38	22.00	18.44	18.47	18.38	19.00
GSM1900								
	Burst Average Power (dBm)				Frame-Average Power (dBm)			
Tx Channel	512	661	810	Tune-up Limit (dBm)	512	661	810	Tune-up Limit (dBm)
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	28.93	29.10	29.23	30.50	19.93	20.10	20.23	21.50
GPRS 1 Tx slot	28.94	29.12	29.24	30.50	19.94	20.12	20.24	21.50
GPRS 2 Tx slots	26.91	27.15	27.33	28.00	20.91	21.15	21.33	22.00
GPRS 3 Tx slots	25.71	26.06	26.14	27.00	21.45	21.80	21.88	22.74
GPRS 4 Tx slots	23.59	23.74	24.06	25.00	20.59	20.74	21.06	22.00
EDGE 1 Tx slot	25.11	25.41	25.34	26.00	16.11	16.41	16.34	17.00
EDGE 2 Tx slots	23.55	23.93	23.77	25.00	17.55	17.93	17.77	19.00
EDGE 3 Tx slots	22.49	22.84	22.65	24.00	18.23	18.58	18.39	19.74
EDGE 4 Tx slots	21.42	21.68	21.56	22.00	18.42	18.68	18.56	19.00

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<Reduced Power Mode for P-Sensor On>

GSM850 Tx Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	31.42	31.40	31.38	31.50	22.42	22.40	22.38	22.50
GPRS 1 Tx slot	31.44	31.42	31.40	31.50	22.44	22.42	22.40	22.50
GPRS 2 Tx slots	29.33	29.28	29.27	29.50	23.33	23.28	23.27	23.50
GPRS 3 Tx slots	27.86	27.90	27.92	28.00	23.60	23.64	23.66	23.74
GPRS 4 Tx slots	25.80	25.88	25.83	26.50	22.80	22.88	22.83	23.50
EDGE 1 Tx slot	26.17	26.13	26.05	26.50	17.17	17.13	17.05	17.50
EDGE 2 Tx slots	24.12	24.03	23.93	24.50	18.12	18.03	17.93	18.50
EDGE 3 Tx slots	21.93	21.90	21.78	22.00	17.67	17.64	17.52	17.74
EDGE 4 Tx slots	19.94	19.82	19.74	20.00	16.94	16.82	16.74	17.00

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

- Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
- Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
- Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
- Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<Reduced Power Mode for Hotspot On>

GSM850	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	Tx Channel	128	189		251	128	189	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	31.42	31.40	31.38	31.50	22.42	22.40	22.38	22.50
GPRS 1 Tx slot	31.44	31.42	31.40	31.50	22.44	22.42	22.40	22.50
GPRS 2 Tx slots	29.33	29.28	29.27	29.50	23.33	23.28	23.27	23.50
GPRS 3 Tx slots	27.86	27.90	27.92	28.00	23.60	23.64	23.66	23.74
GPRS 4 Tx slots	25.80	25.88	25.83	26.50	22.80	22.88	22.83	23.50
EDGE 1 Tx slot	26.17	26.13	26.05	26.50	17.17	17.13	17.05	17.50
EDGE 2 Tx slots	24.12	24.03	23.93	24.50	18.12	18.03	17.93	18.50
EDGE 3 Tx slots	21.93	21.90	21.78	22.00	17.67	17.64	17.52	17.74
EDGE 4 Tx slots	19.94	19.82	19.74	20.00	16.94	16.82	16.74	17.00
GSM1900	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
Tx Channel	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	28.02	28.50	28.35	29.00	19.02	19.50	19.35	20.00
GPRS 1 Tx slot	28.04	28.51	28.36	29.00	19.04	19.51	19.36	20.00
GPRS 2 Tx slots	26.17	26.45	26.06	26.50	20.17	20.45	20.06	20.50
GPRS 3 Tx slots	25.12	25.10	25.02	25.50	20.86	20.84	20.76	21.24
GPRS 4 Tx slots	23.01	23.38	23.15	23.50	20.01	20.38	20.15	20.50
EDGE 1 Tx slot	25.11	25.11	24.90	26.00	16.11	16.11	15.90	17.00
EDGE 2 Tx slots	23.55	23.67	23.40	25.00	17.55	17.67	17.40	19.00
EDGE 3 Tx slots	22.49	22.61	22.36	24.00	18.23	18.35	18.10	19.74
EDGE 4 Tx slots	21.42	21.43	21.47	22.00	18.42	18.43	18.47	19.00

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots. The calculated method are shown as below:

- Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
- Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
- Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
- Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

- Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.
- Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.
- Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.
- Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.
- Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.
- Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

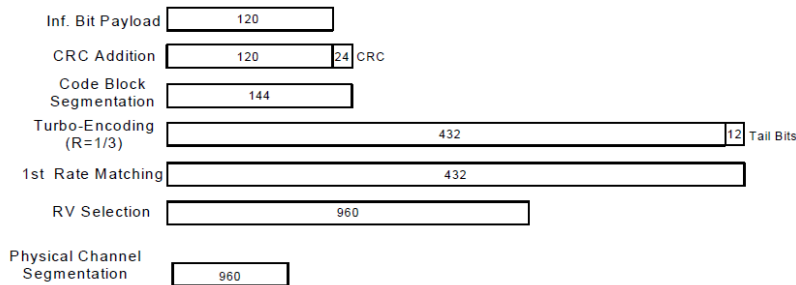


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

Setup Configuration

<WCDMA Conducted Power>

General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA

<Full Power Mode>

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band V			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538		4132	4182	4233	
Rx Channel		9662	9800	9938		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	23.14	23.20	23.28	24.00	23.36	23.33	23.22	24.00
3GPP Rel 99	RMC 12.2Kbps	23.15	23.23	23.30	24.00	23.37	23.35	23.24	24.00
3GPP Rel 6	HSDPA Subtest-1	22.09	22.30	22.45	23.50	22.40	22.31	22.39	23.50
3GPP Rel 6	HSDPA Subtest-2	22.16	22.38	22.50	23.50	22.40	22.31	22.38	23.50
3GPP Rel 6	HSDPA Subtest-3	21.25	21.40	21.52	23.00	21.38	21.30	21.41	23.00
3GPP Rel 6	HSDPA Subtest-4	21.27	21.43	21.50	23.00	21.35	21.30	21.35	23.00
3GPP Rel 8	DC-HSDPA Subtest-1	22.13	22.18	22.28	23.50	22.36	22.28	22.18	23.50
3GPP Rel 8	DC-HSDPA Subtest-2	22.08	22.30	22.35	23.50	22.15	22.38	22.35	23.50
3GPP Rel 8	DC-HSDPA Subtest-3	21.25	21.32	21.42	23.00	21.36	21.45	21.65	23.00
3GPP Rel 8	DC-HSDPA Subtest-4	21.26	21.40	21.63	23.00	21.38	21.63	21.52	23.00
3GPP Rel 6	HSUPA Subtest-1	22.10	22.24	22.32	23.50	22.36	22.50	22.30	23.50
3GPP Rel 6	HSUPA Subtest-2	19.79	19.93	20.03	21.50	20.34	20.23	20.19	21.50
3GPP Rel 6	HSUPA Subtest-3	22.26	22.31	22.35	22.50	22.20	22.12	22.00	22.50
3GPP Rel 6	HSUPA Subtest-4	19.93	19.92	20.03	21.50	20.40	20.10	20.30	21.50
3GPP Rel 6	HSUPA Subtest-5	22.50	22.26	22.50	23.50	22.60	22.35	22.65	23.50



<Reduced Power Mode for P-Sensor On>

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band V			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538		4132	4182	4233	
Rx Channel		9662	9800	9938		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	21.05	21.10	21.13	21.50	21.92	21.89	21.96	22.50
3GPP Rel 99	RMC 12.2Kbps	21.06	21.11	21.15	21.50	21.95	21.90	21.98	22.50
3GPP Rel 6	HSDPA Subtest-1	20.03	20.95	20.80	21.50	21.54	21.59	21.91	22.50
3GPP Rel 6	HSDPA Subtest-2	20.04	20.92	20.82	21.50	21.64	21.71	21.88	22.50
3GPP Rel 6	HSDPA Subtest-3	20.08	20.97	20.84	21.00	21.67	21.68	21.93	22.00
3GPP Rel 6	HSDPA Subtest-4	20.09	20.96	20.87	21.00	21.19	21.23	21.54	22.00
3GPP Rel 8	DC-HSDPA Subtest-1	20.05	20.98	20.66	21.50	21.48	21.22	21.35	22.50
3GPP Rel 8	DC-HSDPA Subtest-2	20.10	20.83	20.48	21.50	21.35	21.15	21.28	22.50
3GPP Rel 8	DC-HSDPA Subtest-3	20.07	20.40	20.58	21.00	21.12	21.09	21.15	22.00
3GPP Rel 8	DC-HSDPA Subtest-4	20.01	20.35	20.72	21.00	21.05	21.12	21.12	22.00
3GPP Rel 6	HSUPA Subtest-1	21.00	20.91	20.60	21.50	21.63	21.38	21.20	22.50
3GPP Rel 6	HSUPA Subtest-2	19.25	19.08	19.13	19.50	19.58	19.48	19.35	20.50
3GPP Rel 6	HSUPA Subtest-3	20.03	20.97	20.60	21.50	21.71	21.46	21.28	22.50
3GPP Rel 6	HSUPA Subtest-4	19.32	19.31	19.18	19.50	19.21	19.28	19.63	20.50
3GPP Rel 6	HSUPA Subtest-5	20.03	20.96	20.61	21.50	21.49	21.30	21.09	22.50

<Reduced Power Mode for Hotspot On>

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band V			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538		4132	4182	4233	
Rx Channel		9662	9800	9938		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	18.40	18.47	18.50	19.00	21.92	21.89	21.96	22.50
3GPP Rel 99	RMC 12.2Kbps	18.41	18.48	18.51	19.00	21.95	21.90	21.98	22.50
3GPP Rel 6	HSDPA Subtest-1	18.49	18.30	18.16	19.00	21.54	21.59	21.91	22.50
3GPP Rel 6	HSDPA Subtest-2	18.42	18.33	18.21	19.00	21.64	21.71	21.88	22.50
3GPP Rel 6	HSDPA Subtest-3	18.45	18.41	18.26	18.50	21.67	21.68	21.93	22.00
3GPP Rel 6	HSDPA Subtest-4	18.49	18.46	18.27	18.50	21.19	21.23	21.54	22.00
3GPP Rel 8	DC-HSDPA Subtest-1	18.31	18.20	18.05	19.00	21.48	21.22	21.35	22.50
3GPP Rel 8	DC-HSDPA Subtest-2	18.01	18.20	18.04	19.00	21.35	21.15	21.28	22.50
3GPP Rel 8	DC-HSDPA Subtest-3	18.05	18.05	18.06	18.50	21.12	21.09	21.15	22.00
3GPP Rel 8	DC-HSDPA Subtest-4	18.07	18.23	18.21	18.50	21.05	21.12	21.12	22.00
3GPP Rel 6	HSUPA Subtest-1	18.38	18.20	17.92	19.00	21.63	21.38	21.20	22.50
3GPP Rel 6	HSUPA Subtest-2	16.58	16.32	16.62	17.00	19.58	19.48	19.35	20.50
3GPP Rel 6	HSUPA Subtest-3	18.38	18.25	17.92	19.00	21.71	21.46	21.28	22.50
3GPP Rel 6	HSUPA Subtest-4	16.78	16.58	16.35	17.00	19.21	19.28	19.63	20.50
3GPP Rel 6	HSUPA Subtest-5	18.30	18.18	17.91	19.00	21.49	21.30	21.09	22.50


<Reduced Power Mode for Handheld On>

Band		WCDMA Band II			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538	
Rx Channel		9662	9800	9938	
Frequency (MHz)		1852.4	1880	1907.6	
3GPP Rel 99	AMR 12.2Kbps	22.45	22.37	22.50	23.00
3GPP Rel 99	RMC 12.2Kbps	22.47	22.39	22.51	23.00
3GPP Rel 6	HSDPA Subtest-1	22.16	22.31	22.19	23.00
3GPP Rel 6	HSDPA Subtest-2	22.22	22.30	22.19	23.00
3GPP Rel 6	HSDPA Subtest-3	22.20	22.24	22.21	22.50
3GPP Rel 6	HSDPA Subtest-4	22.21	22.18	22.22	22.50
3GPP Rel 8	DC-HSDPA Subtest-1	22.05	22.08	22.04	23.00
3GPP Rel 8	DC-HSDPA Subtest-2	22.15	22.04	22.18	23.00
3GPP Rel 8	DC-HSDPA Subtest-3	22.12	22.12	22.15	22.50
3GPP Rel 8	DC-HSDPA Subtest-4	22.05	22.05	22.03	22.50
3GPP Rel 6	HSUPA Subtest-1	21.78	22.20	21.95	23.00
3GPP Rel 6	HSUPA Subtest-2	19.68	19.63	19.61	21.00
3GPP Rel 6	HSUPA Subtest-3	21.90	22.25	21.74	23.00
3GPP Rel 6	HSUPA Subtest-4	19.35	19.54	19.48	21.00
3GPP Rel 6	HSUPA Subtest-5	21.86	22.18	21.97	23.00


<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B5 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE B38 SAR test was covered by B41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
10. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8820C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.

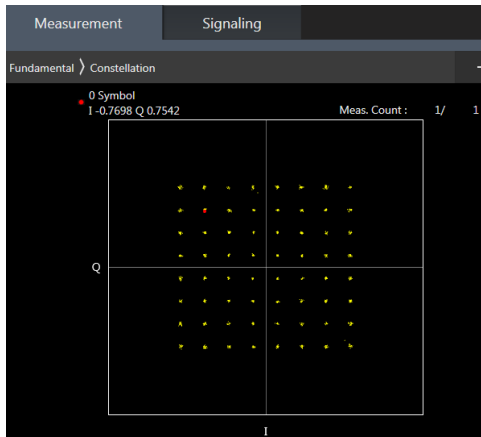

64QAM

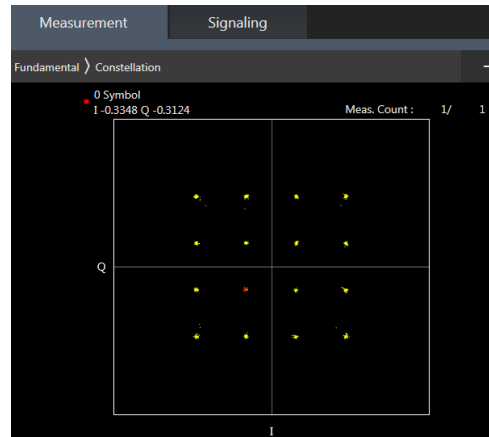

16QAM



<Full Power Mode>

<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	23.08	22.97	22.95	24	0
10	QPSK	1	25	22.94	22.92	22.89		
10	QPSK	1	49	22.82	22.90	22.85		
10	QPSK	25	0	21.95	21.84	21.83	23	1
10	QPSK	25	12	21.86	21.81	21.77		
10	QPSK	25	25	21.85	21.79	21.75		
10	QPSK	50	0	21.85	21.81	21.79	23	1
10	16QAM	1	0	21.76	21.74	21.61		
10	16QAM	1	25	21.72	21.64	21.64		
10	16QAM	1	49	21.64	21.63	21.60	22	2
10	16QAM	25	0	20.92	20.84	20.83		
10	16QAM	25	12	20.89	20.84	20.83		
10	16QAM	25	25	20.86	20.80	20.81	22	2
10	16QAM	25	25	20.86	20.80	20.81		
10	16QAM	50	0	20.87	20.83	20.82		
10	64QAM	1	0	20.87	20.73	20.53	22	2
10	64QAM	1	25	20.83	20.70	20.62		
10	64QAM	1	49	20.76	20.58	20.58		
10	64QAM	25	0	19.96	19.92	19.91	21	3
10	64QAM	25	12	19.94	19.89	19.85		
10	64QAM	25	25	19.92	19.85	19.79		
10	64QAM	50	0	19.98	19.93	19.76		



Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	23.07	22.88	22.91	24	0
5	QPSK	1	12	22.54	22.87	22.87		
5	QPSK	1	24	22.80	22.86	22.84		
5	QPSK	12	0	21.96	21.82	21.83	23	1
5	QPSK	12	7	21.90	21.81	21.80		
5	QPSK	12	13	21.94	21.79	21.80		
5	QPSK	25	0	21.93	21.81	21.82	23	1
5	16QAM	1	0	21.90	21.85	21.68		
5	16QAM	1	12	21.99	21.81	21.75		
5	16QAM	1	24	21.73	21.83	21.81	22	2
5	16QAM	12	0	20.89	20.77	20.81		
5	16QAM	12	7	20.87	20.77	20.78		
5	16QAM	12	13	20.85	20.74	20.75	22	2
5	16QAM	25	0	20.98	20.81	20.84		
5	64QAM	1	0	21.04	20.89	20.92		
5	64QAM	1	12	20.94	20.87	20.89	22	2
5	64QAM	1	24	20.92	20.81	20.88		
5	64QAM	12	0	19.94	19.85	19.85		
5	64QAM	12	7	19.90	19.85	19.82	21	3
5	64QAM	12	13	19.90	19.82	19.81		
5	64QAM	25	0	19.98	19.87	19.88		
Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	23.01	22.90	22.90	24	0
3	QPSK	1	8	22.97	22.87	22.84		
3	QPSK	1	14	22.97	22.89	22.86		
3	QPSK	8	0	21.93	21.85	21.84	23	1
3	QPSK	8	4	21.93	21.83	21.85		
3	QPSK	8	7	21.92	21.82	21.85		
3	QPSK	15	0	21.93	21.82	21.83	23	1
3	16QAM	1	0	21.91	21.68	21.81		
3	16QAM	1	8	21.81	21.71	21.74		
3	16QAM	1	14	21.75	21.83	21.85	22	2
3	16QAM	8	0	20.95	20.79	20.83		
3	16QAM	8	4	20.95	20.79	20.82		
3	16QAM	8	7	20.93	20.79	20.81	22	2
3	16QAM	15	0	20.92	20.83	20.82		
3	64QAM	1	0	20.82	20.61	20.72		
3	64QAM	1	8	20.80	20.59	20.64	22	2
3	64QAM	1	14	20.86	20.62	20.67		
3	64QAM	8	0	19.94	19.91	19.88		
3	64QAM	8	4	19.96	19.89	19.87	21	3
3	64QAM	8	7	19.98	19.85	19.87		
3	64QAM	15	0	19.96	19.86	19.86		



Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	22.94	22.82	22.78	24	0
1.4	QPSK	1	3	22.91	22.85	22.81		
1.4	QPSK	1	5	22.94	22.82	22.79		
1.4	QPSK	3	0	22.93	22.84	22.81		
1.4	QPSK	3	1	22.93	22.83	22.82		
1.4	QPSK	3	3	22.93	22.84	22.80		
1.4	QPSK	6	0	21.88	21.77	21.75	23	1
1.4	16QAM	1	0	21.86	21.71	21.73	23	1
1.4	16QAM	1	3	21.79	21.74	21.63		
1.4	16QAM	1	5	21.73	21.76	21.61		
1.4	16QAM	3	0	21.80	21.75	21.77		
1.4	16QAM	3	1	21.82	21.72	21.74		
1.4	16QAM	3	3	21.78	21.71	21.73		
1.4	16QAM	6	0	20.90	20.80	20.77	22	2
1.4	64QAM	1	0	20.82	20.66	20.66	22	2
1.4	64QAM	1	3	20.84	20.68	20.56		
1.4	64QAM	1	5	20.86	20.70	20.55		
1.4	64QAM	3	0	20.91	20.75	20.74		
1.4	64QAM	3	1	20.84	20.80	20.75		
1.4	64QAM	3	3	20.89	20.77	20.73		
1.4	64QAM	6	0	19.92	19.83	19.65	21	3



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel			20850	21100	21350			
Frequency (MHz)			2510	2535	2560			
20	QPSK	1	0	22.71	22.74	22.97	24	0
20	QPSK	1	49	22.70	22.78	22.87		
20	QPSK	1	99	22.76	22.82	22.83		
20	QPSK	50	0	21.72	21.78	21.82	23	1
20	QPSK	50	24	21.71	21.75	21.85		
20	QPSK	50	50	21.70	21.73	21.88		
20	QPSK	100	0	21.69	21.76	21.84	23	1
20	16QAM	1	0	21.44	21.67	21.84		
20	16QAM	1	49	21.45	21.61	21.89		
20	16QAM	1	99	21.55	21.70	21.81	22	2
20	16QAM	50	0	20.74	20.76	20.85		
20	16QAM	50	24	20.77	20.77	20.88		
20	16QAM	50	50	20.77	20.81	20.93	22	2
20	16QAM	100	0	20.73	20.77	20.87		
20	64QAM	1	0	20.56	20.62	20.75		
20	64QAM	1	49	20.56	20.60	20.78	22	2
20	64QAM	1	99	20.62	20.73	20.84		
20	64QAM	50	0	19.89	19.92	20.00		
20	64QAM	50	24	19.87	19.92	20.02	21	3
20	64QAM	50	50	19.87	19.97	20.04		
20	64QAM	100	0	19.85	19.90	19.99		



Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	22.68	22.77	22.91	24	0
15	QPSK	1	37	22.73	22.80	22.89		
15	QPSK	1	74	22.74	22.80	22.87		
15	QPSK	36	0	21.68	21.73	21.80	23	1
15	QPSK	36	20	21.69	21.73	21.82		
15	QPSK	36	39	21.71	21.75	21.83		
15	QPSK	75	0	21.71	21.74	21.82	23	1
15	16QAM	1	0	21.67	21.70	21.61		
15	16QAM	1	37	21.69	21.66	21.64		
15	16QAM	1	74	21.77	21.68	21.74	22	2
15	16QAM	36	0	20.72	20.70	20.75		
15	16QAM	36	20	20.72	20.69	20.79		
15	16QAM	36	39	20.72	20.75	20.81	22	2
15	16QAM	75	0	20.77	20.77	20.83		
15	64QAM	1	0	20.64	20.59	20.72		
15	64QAM	1	37	20.55	20.55	20.79	22	2
15	64QAM	1	74	20.64	20.63	20.80		
15	64QAM	36	0	19.83	19.86	19.91		
15	64QAM	36	20	19.85	19.90	19.94	21	3
15	64QAM	36	39	19.85	19.88	19.96		
15	64QAM	75	0	19.89	19.89	19.97		
Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	22.70	22.80	22.90	24	0
10	QPSK	1	25	22.72	22.74	22.78		
10	QPSK	1	49	22.77	22.75	22.83		
10	QPSK	25	0	21.67	21.73	21.79	23	1
10	QPSK	25	12	21.68	21.73	21.81		
10	QPSK	25	25	21.68	21.74	21.81		
10	QPSK	50	0	21.67	21.75	21.81	23	1
10	16QAM	1	0	21.69	21.68	21.79		
10	16QAM	1	25	21.69	21.75	21.84		
10	16QAM	1	49	21.63	21.74	21.89	22	2
10	16QAM	25	0	20.72	20.76	20.84		
10	16QAM	25	12	20.74	20.76	20.84		
10	16QAM	25	25	20.73	20.79	20.85	22	2
10	16QAM	50	0	20.69	20.77	20.83		
10	64QAM	1	0	20.59	20.63	20.73		
10	64QAM	1	25	20.57	20.66	20.79	22	2
10	64QAM	1	49	20.58	20.70	20.54		
10	64QAM	25	0	19.86	19.89	19.94		
10	64QAM	25	12	19.84	19.90	19.95	21	3
10	64QAM	25	25	19.84	19.91	19.95		
10	64QAM	50	0	19.88	19.94	19.71		



Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	22.63	22.76	22.89	24	0
5	QPSK	1	12	22.63	22.75	22.86		
5	QPSK	1	24	22.70	22.79	22.88		
5	QPSK	12	0	21.64	21.73	21.81	23	1
5	QPSK	12	7	21.63	21.74	21.82		
5	QPSK	12	13	21.64	21.75	21.83		
5	QPSK	25	0	21.63	21.74	21.83		
5	16QAM	1	0	21.60	21.66	21.63	23	1
5	16QAM	1	12	21.47	21.64	21.57		
5	16QAM	1	24	21.55	21.60	21.69		
5	16QAM	12	0	20.58	20.68	20.80	22	2
5	16QAM	12	7	20.61	20.69	20.74		
5	16QAM	12	13	20.60	20.67	20.75		
5	16QAM	25	0	20.67	20.76	20.84		
5	64QAM	1	0	20.66	20.76	20.88	22	2
5	64QAM	1	12	20.61	20.80	20.83		
5	64QAM	1	24	20.69	20.83	20.84		
5	64QAM	12	0	19.69	19.78	19.89	21	3
5	64QAM	12	7	19.71	19.81	19.89		
5	64QAM	12	13	19.68	19.82	19.89		
5	64QAM	25	0	19.79	19.88	19.96		

<Reduced Power Mode for P-Sensor On>

<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	21.74	21.71	21.75	22.5	0
10	QPSK	1	25	21.68	21.65	21.72		
10	QPSK	1	49	21.66	21.62	21.79		
10	QPSK	25	0	21.63	21.66	21.73	22.5	0
10	QPSK	25	12	21.61	21.61	21.70		
10	QPSK	25	25	21.66	21.59	21.71		
10	QPSK	50	0	21.70	21.63	21.76	22.5	0
10	16QAM	1	0	21.43	21.54	21.57		
10	16QAM	1	25	21.55	21.60	21.49		
10	16QAM	1	49	21.55	21.52	21.67	22	0.5
10	16QAM	25	0	21.24	21.18	21.21		
10	16QAM	25	12	21.22	21.18	21.21		
10	16QAM	25	25	21.18	21.15	21.20	22	0.5
10	16QAM	50	0	21.22	21.17	21.25		
10	64QAM	1	0	21.42	21.43	21.49		
10	64QAM	1	25	21.42	21.41	21.54	21	1.5
10	64QAM	1	49	21.36	21.33	21.51		
10	64QAM	25	0	20.55	20.48	20.53		
10	64QAM	25	12	20.48	20.44	20.50	21	1.5
10	64QAM	25	25	20.47	20.42	20.48		
10	64QAM	50	0	20.56	20.50	20.57		



Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	21.64	21.60	21.60	22.5	0
5	QPSK	1	12	21.57	21.51	21.57		
5	QPSK	1	24	21.58	21.52	21.58		
5	QPSK	12	0	21.58	21.57	21.57	22.5	0
5	QPSK	12	7	21.58	21.57	21.53		
5	QPSK	12	13	21.56	21.56	21.51		
5	QPSK	25	0	21.61	21.56	21.52		
5	16QAM	1	0	21.42	21.51	21.61	22.5	0
5	16QAM	1	12	21.34	21.47	21.52		
5	16QAM	1	24	21.52	21.47	21.52		
5	16QAM	12	0	21.06	21.06	21.00	22	0.5
5	16QAM	12	7	21.06	21.00	21.01		
5	16QAM	12	13	21.05	20.99	21.02		
5	16QAM	25	0	21.10	21.12	21.09		
5	64QAM	1	0	21.34	21.25	21.34	22	0.5
5	64QAM	1	12	21.39	21.15	21.16		
5	64QAM	1	24	21.36	21.62	21.24		
5	64QAM	12	0	20.38	20.38	20.36	21	1.5
5	64QAM	12	7	20.35	20.34	20.32		
5	64QAM	12	13	20.33	20.29	20.27		
5	64QAM	25	0	20.42	20.37	20.37		
Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	21.63	21.65	21.62	22.5	0
3	QPSK	1	8	21.61	21.61	21.60		
3	QPSK	1	14	21.63	21.62	21.62		
3	QPSK	8	0	21.60	21.59	21.59	22.5	0
3	QPSK	8	4	21.61	21.60	21.57		
3	QPSK	8	7	21.60	21.60	21.56		
3	QPSK	15	0	21.59	21.59	21.57		
3	16QAM	1	0	21.64	21.44	21.51	22.5	0
3	16QAM	1	8	21.61	21.47	21.70		
3	16QAM	1	14	21.54	21.51	21.49		
3	16QAM	8	0	21.12	21.14	21.13	22	0.5
3	16QAM	8	4	21.10	21.10	21.12		
3	16QAM	8	7	21.09	21.17	21.13		
3	16QAM	15	0	21.10	21.04	21.04		
3	64QAM	1	0	21.33	21.34	21.27	22	0.5
3	64QAM	1	8	21.20	21.20	21.30		
3	64QAM	1	14	21.20	21.23	21.29		
3	64QAM	8	0	20.44	20.40	20.46	21	1.5
3	64QAM	8	4	20.40	20.44	20.42		
3	64QAM	8	7	20.41	20.42	20.40		
3	64QAM	15	0	20.41	20.42	20.40		



Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	21.61	21.58	21.57	22.5	0
1.4	QPSK	1	3	21.60	21.58	21.53		
1.4	QPSK	1	5	21.62	21.60	21.57		
1.4	QPSK	3	0	21.62	21.58	21.55		
1.4	QPSK	3	1	21.63	21.56	21.55		
1.4	QPSK	3	3	21.64	21.54	21.55		
1.4	QPSK	6	0	21.64	21.56	21.55	22.5	0
1.4	16QAM	1	0	21.48	21.55	21.61	22.5	0
1.4	16QAM	1	3	21.55	21.41	21.53		
1.4	16QAM	1	5	21.51	21.37	21.57		
1.4	16QAM	3	0	21.54	21.42	21.46		
1.4	16QAM	3	1	21.50	21.37	21.46		
1.4	16QAM	3	3	21.52	21.48	21.43		
1.4	16QAM	6	0	21.13	21.05	21.05	22	0.5
1.4	64QAM	1	0	21.42	21.46	21.28	22	0.5
1.4	64QAM	1	3	21.44	21.41	21.31		
1.4	64QAM	1	5	21.43	21.41	21.34		
1.4	64QAM	3	0	21.52	21.51	21.47		
1.4	64QAM	3	1	21.58	21.48	21.41		
1.4	64QAM	3	3	21.58	21.50	21.45		
1.4	64QAM	6	0	20.47	20.42	20.36	21	1.5



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	21.99	22.10	22.01	22.5	0
20	QPSK	1	49	21.91	21.99	21.96		
20	QPSK	1	99	22.00	22.03	22.00		
20	QPSK	50	0	21.91	21.91	21.99	22.5	0
20	QPSK	50	24	21.93	21.92	22.00		
20	QPSK	50	50	21.96	22.05	22.02		
20	QPSK	100	0	21.93	22.03	22.00	22.5	0
20	16QAM	1	0	22.00	21.72	21.87		
20	16QAM	1	49	21.77	21.88	21.78		
20	16QAM	1	99	21.79	21.78	21.88	22	0.5
20	16QAM	50	0	21.18	21.14	21.24		
20	16QAM	50	24	21.20	21.16	21.24		
20	16QAM	50	50	21.21	21.20	21.27	22	0.5
20	16QAM	100	0	21.15	21.16	21.23		
20	64QAM	1	0	21.38	21.49	21.46		
20	64QAM	1	49	21.40	21.52	21.52	22	0.5
20	64QAM	1	99	21.40	21.40	21.57		
20	64QAM	50	0	20.50	20.49	20.55		
20	64QAM	50	24	20.49	20.54	20.60	21	1.5
20	64QAM	50	50	20.54	20.53	20.60		
20	64QAM	100	0	20.48	20.46	20.53		



Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	22.02	22.03	22.06	22.5	0
15	QPSK	1	37	22.01	22.05	22.07		
15	QPSK	1	74	22.07	22.10	22.11		
15	QPSK	36	0	22.02	22.02	22.09	22.5	0
15	QPSK	36	20	22.05	22.05	22.09		
15	QPSK	36	39	22.06	22.08	22.07		
15	QPSK	75	0	22.02	22.03	22.08	22.5	0
15	16QAM	1	0	21.97	22.01	21.86		
15	16QAM	1	37	21.93	21.93	22.13		
15	16QAM	1	74	21.99	22.05	22.05	22	0.5
15	16QAM	36	0	21.15	21.13	21.16		
15	16QAM	36	20	21.15	21.16	21.17		
15	16QAM	36	39	21.14	21.21	21.17	22	0.5
15	16QAM	75	0	21.21	21.18	21.20		
15	64QAM	1	0	21.54	21.34	21.34		
15	64QAM	1	37	21.41	21.24	21.53	22	0.5
15	64QAM	1	74	21.43	21.53	21.36		
15	64QAM	36	0	20.47	20.46	20.52		
15	64QAM	36	20	20.49	20.50	20.51	21	1.5
15	64QAM	36	39	20.47	20.51	20.53		
15	64QAM	75	0	20.49	20.49	20.51		
Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	21.99	21.96	21.99	22.5	0
10	QPSK	1	25	21.99	21.96	22.00		
10	QPSK	1	49	22.02	22.01	22.05		
10	QPSK	25	0	21.87	21.91	21.96	22.5	0
10	QPSK	25	12	21.94	21.92	21.95		
10	QPSK	25	25	21.92	21.91	21.96		
10	QPSK	50	0	21.92	21.91	21.95	22.5	0
10	16QAM	1	0	21.84	21.84	21.91		
10	16QAM	1	25	21.88	21.90	21.91		
10	16QAM	1	49	21.79	21.79	22.06	22	0.5
10	16QAM	25	0	21.11	21.17	21.20		
10	16QAM	25	12	21.16	21.17	21.22		
10	16QAM	25	25	21.18	21.13	21.22	22	0.5
10	16QAM	50	0	21.14	21.14	21.19		
10	64QAM	1	0	21.31	21.29	21.48		
10	64QAM	1	25	21.33	21.30	21.51	22	0.5
10	64QAM	1	49	21.38	21.46	21.50		
10	64QAM	25	0	20.47	20.45	20.48		
10	64QAM	25	12	20.49	20.49	20.48	21	1.5
10	64QAM	25	25	20.49	20.51	20.50		
10	64QAM	50	0	20.53	20.49	20.53		



Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	21.87	21.95	21.98	22.5	0
5	QPSK	1	12	21.86	21.95	21.96		
5	QPSK	1	24	21.86	21.96	21.99		
5	QPSK	12	0	21.84	21.91	21.96	22.5	0
5	QPSK	12	7	21.85	21.93	21.97		
5	QPSK	12	13	21.86	21.91	21.96		
5	QPSK	25	0	21.84	21.92	21.95	22.5	0
5	16QAM	1	0	21.76	21.70	21.85		
5	16QAM	1	12	21.72	21.91	21.87		
5	16QAM	1	24	21.77	22.00	21.98	22	0.5
5	16QAM	12	0	21.04	21.11	21.12		
5	16QAM	12	7	21.06	21.11	21.13		
5	16QAM	12	13	21.04	21.09	21.16	22	0.5
5	16QAM	25	0	21.12	21.15	21.16		
5	64QAM	1	0	21.36	21.33	21.43		
5	64QAM	1	12	21.43	21.41	21.40	21	1.5
5	64QAM	1	24	21.32	21.39	21.51		
5	64QAM	12	0	20.34	20.38	20.45		
5	64QAM	12	7	20.32	20.37	20.43	21	1.5
5	64QAM	12	13	20.36	20.38	20.44		
5	64QAM	25	0	20.40	20.44	20.50		



<Reduced Power Mode for Hotspot On>

<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	21.74	21.71	21.75	22.5	0
10	QPSK	1	25	21.68	21.65	21.72		
10	QPSK	1	49	21.66	21.62	21.79		
10	QPSK	25	0	21.63	21.66	21.73	22.5	0
10	QPSK	25	12	21.61	21.61	21.70		
10	QPSK	25	25	21.66	21.59	21.71		
10	QPSK	50	0	21.70	21.63	21.76	22.5	0
10	16QAM	1	0	21.43	21.54	21.57		
10	16QAM	1	25	21.55	21.60	21.49		
10	16QAM	1	49	21.55	21.52	21.67	22	0.5
10	16QAM	25	0	21.24	21.18	21.21		
10	16QAM	25	12	21.22	21.18	21.21		
10	16QAM	25	25	21.18	21.15	21.20	22	0.5
10	16QAM	50	0	21.22	21.17	21.25		
10	64QAM	1	0	21.42	21.43	21.49		
10	64QAM	1	25	21.42	21.41	21.54	22	0.5
10	64QAM	1	49	21.36	21.33	21.51		
10	64QAM	25	0	20.55	20.48	20.53		
10	64QAM	25	12	20.48	20.44	20.50	21	1.5
10	64QAM	25	25	20.47	20.42	20.48		
10	64QAM	50	0	20.56	20.50	20.57		



Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	21.64	21.60	21.60	22.5	0
5	QPSK	1	12	21.57	21.51	21.57		
5	QPSK	1	24	21.58	21.52	21.58		
5	QPSK	12	0	21.58	21.57	21.57	22.5	0
5	QPSK	12	7	21.58	21.57	21.53		
5	QPSK	12	13	21.56	21.56	21.51		
5	QPSK	25	0	21.61	21.56	21.52		
5	16QAM	1	0	21.42	21.51	21.61	22.5	0
5	16QAM	1	12	21.34	21.47	21.52		
5	16QAM	1	24	21.52	21.47	21.52		
5	16QAM	12	0	21.06	21.06	21.00	22	0.5
5	16QAM	12	7	21.06	21.00	21.01		
5	16QAM	12	13	21.05	20.99	21.02		
5	16QAM	25	0	21.10	21.12	21.09		
5	64QAM	1	0	21.34	21.25	21.34	22	0.5
5	64QAM	1	12	21.39	21.15	21.16		
5	64QAM	1	24	21.36	21.62	21.24		
5	64QAM	12	0	20.38	20.38	20.36	21	1.5
5	64QAM	12	7	20.35	20.34	20.32		
5	64QAM	12	13	20.33	20.29	20.27		
5	64QAM	25	0	20.42	20.37	20.37		
Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	21.63	21.65	21.62	22.5	0
3	QPSK	1	8	21.61	21.61	21.60		
3	QPSK	1	14	21.63	21.62	21.62		
3	QPSK	8	0	21.60	21.59	21.59	22.5	0
3	QPSK	8	4	21.61	21.60	21.57		
3	QPSK	8	7	21.60	21.60	21.56		
3	QPSK	15	0	21.59	21.59	21.57		
3	16QAM	1	0	21.64	21.44	21.51	22.5	0
3	16QAM	1	8	21.61	21.47	21.70		
3	16QAM	1	14	21.54	21.51	21.49		
3	16QAM	8	0	21.12	21.14	21.13	22	0.5
3	16QAM	8	4	21.10	21.10	21.12		
3	16QAM	8	7	21.09	21.17	21.13		
3	16QAM	15	0	21.10	21.04	21.04		
3	64QAM	1	0	21.33	21.34	21.27	22	0.5
3	64QAM	1	8	21.20	21.20	21.30		
3	64QAM	1	14	21.20	21.23	21.29		
3	64QAM	8	0	20.44	20.40	20.46	21	1.5
3	64QAM	8	4	20.40	20.44	20.42		
3	64QAM	8	7	20.41	20.42	20.40		
3	64QAM	15	0	20.41	20.42	20.40		



Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	21.61	21.58	21.57	22.5	0
1.4	QPSK	1	3	21.60	21.58	21.53		
1.4	QPSK	1	5	21.62	21.60	21.57		
1.4	QPSK	3	0	21.62	21.58	21.55		
1.4	QPSK	3	1	21.63	21.56	21.55		
1.4	QPSK	3	3	21.64	21.54	21.55		
1.4	QPSK	6	0	21.64	21.56	21.55	22.5	0
1.4	16QAM	1	0	21.48	21.55	21.61	22.5	0
1.4	16QAM	1	3	21.55	21.41	21.53		
1.4	16QAM	1	5	21.51	21.37	21.57		
1.4	16QAM	3	0	21.54	21.42	21.46		
1.4	16QAM	3	1	21.50	21.37	21.46		
1.4	16QAM	3	3	21.52	21.48	21.43		
1.4	16QAM	6	0	21.13	21.05	21.05	22	0.5
1.4	64QAM	1	0	21.42	21.46	21.28	22	0.5
1.4	64QAM	1	3	21.44	21.41	21.31		
1.4	64QAM	1	5	21.43	21.41	21.34		
1.4	64QAM	3	0	21.52	21.51	21.47		
1.4	64QAM	3	1	21.58	21.48	21.41		
1.4	64QAM	3	3	21.58	21.50	21.45		
1.4	64QAM	6	0	20.47	20.42	20.36	21	1.5



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	17.31	17.57	17.53	18	0
20	QPSK	1	49	17.31	17.55	17.55		
20	QPSK	1	99	17.26	17.40	17.49		
20	QPSK	50	0	17.17	17.32	17.36	18	0
20	QPSK	50	24	17.17	17.33	17.37		
20	QPSK	50	50	17.18	17.42	17.40		
20	16QAM	1	0	17.12	17.24	17.51	18	0
20	16QAM	1	49	17.15	17.27	17.49		
20	16QAM	1	99	17.20	17.26	17.41		
20	16QAM	50	0	17.24	17.39	17.46	18	0
20	16QAM	50	24	17.29	17.41	17.48		
20	16QAM	50	50	17.29	17.41	17.50		
20	16QAM	100	0	17.26	17.39	17.46	18	0
20	64QAM	1	0	17.02	17.16	17.26		
20	64QAM	1	49	17.02	17.15	17.17		
20	64QAM	1	99	17.01	17.19	17.23	18	0
20	64QAM	50	0	17.32	17.32	17.38		
20	64QAM	50	24	17.18	17.33	17.34		
20	64QAM	50	50	17.19	17.37	17.33	18	0
20	64QAM	100	0	17.20	17.40	17.36		



Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	17.19	17.31	17.37	18	0
15	QPSK	1	37	17.23	17.33	17.40		
15	QPSK	1	74	17.26	17.41	17.39		
15	QPSK	36	0	17.20	17.32	17.35	18	0
15	QPSK	36	20	17.20	17.31	17.36		
15	QPSK	36	39	17.20	17.34	17.39		
15	QPSK	75	0	17.18	17.33	17.35	18	0
15	16QAM	1	0	17.18	17.27	17.30		
15	16QAM	1	37	17.22	17.31	17.38		
15	16QAM	1	74	17.28	17.37	17.48	18	0
15	16QAM	36	0	17.24	17.30	17.35		
15	16QAM	36	20	17.26	17.33	17.38		
15	16QAM	36	39	17.27	17.34	17.39	18	0
15	16QAM	75	0	17.30	17.37	17.41		
15	64QAM	1	0	17.12	17.41	17.41		
15	64QAM	1	37	17.40	17.42	17.42	18	0
15	64QAM	1	74	17.30	17.43	17.43		
15	64QAM	36	0	17.13	17.21	17.21		
15	64QAM	36	20	17.25	17.20	17.20	18	0
15	64QAM	36	39	17.43	17.34	17.34		
15	64QAM	75	0	17.25	17.19	17.19		
Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	17.28	17.28	17.44	18	0
10	QPSK	1	25	17.22	16.85	17.42		
10	QPSK	1	49	17.26	16.90	17.36		
10	QPSK	25	0	17.17	17.16	17.36	18	0
10	QPSK	25	12	17.19	17.29	17.36		
10	QPSK	25	25	17.19	17.33	17.37		
10	QPSK	50	0	17.17	17.31	17.36	18	0
10	16QAM	1	0	17.07	17.15	17.32		
10	16QAM	1	25	17.04	17.12	17.32		
10	16QAM	1	49	17.07	17.21	17.39	18	0
10	16QAM	25	0	17.25	17.36	17.45		
10	16QAM	25	12	17.27	17.35	17.44		
10	16QAM	25	25	17.27	17.37	17.45	18	0
10	16QAM	50	0	17.28	17.34	17.44		
10	64QAM	1	0	17.06	17.41	17.10		
10	64QAM	1	25	16.90	17.42	17.09	18	0
10	64QAM	1	49	16.90	17.43	17.20		
10	64QAM	25	0	17.20	17.21	17.24		
10	64QAM	25	12	17.17	17.20	17.31	18	0
10	64QAM	25	25	17.29	17.34	17.30		
10	64QAM	50	0	16.95	17.19	17.30		



Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	17.16	17.33	17.38	18	0
5	QPSK	1	12	17.15	17.31	17.34		
5	QPSK	1	24	17.20	17.37	17.39		
5	QPSK	12	0	17.15	17.32	17.34	18	0
5	QPSK	12	7	17.15	17.31	17.35		
5	QPSK	12	13	17.16	17.33	17.35		
5	QPSK	25	0	17.15	17.31	17.35	18	0
5	16QAM	1	0	17.12	17.24	17.42		
5	16QAM	1	12	17.20	17.33	17.42		
5	16QAM	1	24	17.17	17.38	17.46	18	0
5	16QAM	12	0	17.21	17.35	17.42		
5	16QAM	12	7	17.22	17.38	17.41		
5	16QAM	12	13	17.26	17.35	17.44	18	0
5	16QAM	25	0	17.27	17.37	17.43		
5	64QAM	1	0	16.99	17.41	17.13		
5	64QAM	1	12	17.06	17.42	17.19	18	0
5	64QAM	1	24	17.08	17.43	17.17		
5	64QAM	12	0	17.28	17.21	17.26		
5	64QAM	12	7	17.30	17.20	17.28	18	0
5	64QAM	12	13	17.29	17.34	17.29		
5	64QAM	25	0	17.29	17.19	17.33		



<Reduced Power Mode for Handheld On>

<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel			20850	21100	21350			
Frequency (MHz)			2510	2535	2560			
20	QPSK	1	0	21.42	21.47	21.39	22	0
20	QPSK	1	49	21.41	21.46	21.44		
20	QPSK	1	99	21.30	21.36	21.42		
20	QPSK	50	0	21.30	21.31	21.36	22	0
20	QPSK	50	24	21.30	21.30	21.38		
20	QPSK	50	50	21.31	21.45	21.39		
20	QPSK	100	0	21.30	21.42	21.35	22	0
20	16QAM	1	0	21.04	21.22	21.14		
20	16QAM	1	49	21.13	21.23	21.26		
20	16QAM	1	99	21.18	21.37	21.32	22	0
20	16QAM	50	0	21.33	21.35	21.43		
20	16QAM	50	24	21.35	21.37	21.38		
20	16QAM	50	50	21.35	21.39	21.34	22	0
20	16QAM	100	0	21.34	21.37	21.36		
20	64QAM	1	0	21.54	21.49	21.63		
20	64QAM	1	49	21.48	21.49	21.63	22	0
20	64QAM	1	99	21.50	21.49	21.72		
20	64QAM	50	0	20.39	20.38	20.44		
20	64QAM	50	24	20.43	20.39	20.37	21	1
20	64QAM	50	50	20.40	20.39	20.38		
20	64QAM	100	0	20.38	20.38	20.35		



Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	21.40	21.42	21.38	22	0
15	QPSK	1	37	21.36	21.38	21.37		
15	QPSK	1	74	21.39	21.39	21.41		
15	QPSK	36	0	21.29	21.30	21.34	22	0
15	QPSK	36	20	21.34	21.31	21.35		
15	QPSK	36	39	21.33	21.31	21.35		
15	QPSK	75	0	21.36	21.31	21.35	22	0
15	16QAM	1	0	21.12	21.00	21.04		
15	16QAM	1	37	21.09	21.02	21.10		
15	16QAM	1	74	21.16	21.04	21.20	22	0
15	16QAM	36	0	21.31	21.32	21.35		
15	16QAM	36	20	21.35	21.31	21.40		
15	16QAM	36	39	21.34	21.35	21.39	22	0
15	16QAM	75	0	21.38	21.38	21.42		
15	64QAM	1	0	21.53	21.60	21.57		
15	64QAM	1	37	21.46	21.60	21.55	22	0
15	64QAM	1	74	21.53	21.67	21.57		
15	64QAM	36	0	20.38	20.33	20.36		
15	64QAM	36	20	20.37	20.35	20.38	21	1
15	64QAM	36	39	20.36	20.38	20.39		
15	64QAM	75	0	20.31	20.39	20.41		
Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	21.36	21.40	21.41	22	0
10	QPSK	1	25	21.35	21.32	21.43		
10	QPSK	1	49	21.34	21.37	21.44		
10	QPSK	25	0	21.29	21.29	21.37	22	0
10	QPSK	25	12	21.29	21.29	21.37		
10	QPSK	25	25	21.32	21.30	21.38		
10	QPSK	50	0	21.32	21.31	21.38	22	0
10	16QAM	1	0	21.21	21.11	21.29		
10	16QAM	1	25	21.16	21.06	21.35		
10	16QAM	1	49	21.23	21.15	21.25	22	0
10	16QAM	25	0	21.34	21.35	21.39		
10	16QAM	25	12	21.36	21.36	21.41		
10	16QAM	25	25	21.37	21.36	21.41	22	0
10	16QAM	50	0	21.35	21.36	21.42		
10	64QAM	1	0	21.37	21.45	21.54		
10	64QAM	1	25	21.49	21.60	21.49	22	0
10	64QAM	1	49	21.66	21.48	21.68		
10	64QAM	25	0	20.34	20.33	20.35		
10	64QAM	25	12	20.32	20.37	20.36	21	1
10	64QAM	25	25	20.37	20.38	20.41		
10	64QAM	50	0	20.40	20.38	20.43		



Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	21.30	21.33	21.43	22	0
5	QPSK	1	12	21.25	21.29	21.41		
5	QPSK	1	24	21.28	21.38	21.44		
5	QPSK	12	0	21.28	21.30	21.36	22	0
5	QPSK	12	7	21.26	21.33	21.39		
5	QPSK	12	13	21.29	21.34	21.36		
5	QPSK	25	0	21.26	21.34	21.37	22	0
5	16QAM	1	0	21.18	21.14	21.29		
5	16QAM	1	12	21.15	21.03	21.25		
5	16QAM	1	24	21.30	21.17	21.26	22	0
5	16QAM	12	0	21.22	21.32	21.39		
5	16QAM	12	7	21.26	21.28	21.33		
5	16QAM	12	13	21.23	21.31	21.35	22	0
5	16QAM	25	0	21.26	21.41	21.41		
5	64QAM	1	0	21.51	21.73	21.76		
5	64QAM	1	12	21.62	21.71	21.78	22	0
5	64QAM	1	24	21.60	21.77	21.72		
5	64QAM	12	0	20.28	20.29	20.35		
5	64QAM	12	7	20.27	20.29	20.32	21	1
5	64QAM	12	13	20.21	20.33	20.34		
5	64QAM	25	0	20.32	20.39	20.43		

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- a. 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- b. "special subframe S" contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- c. Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

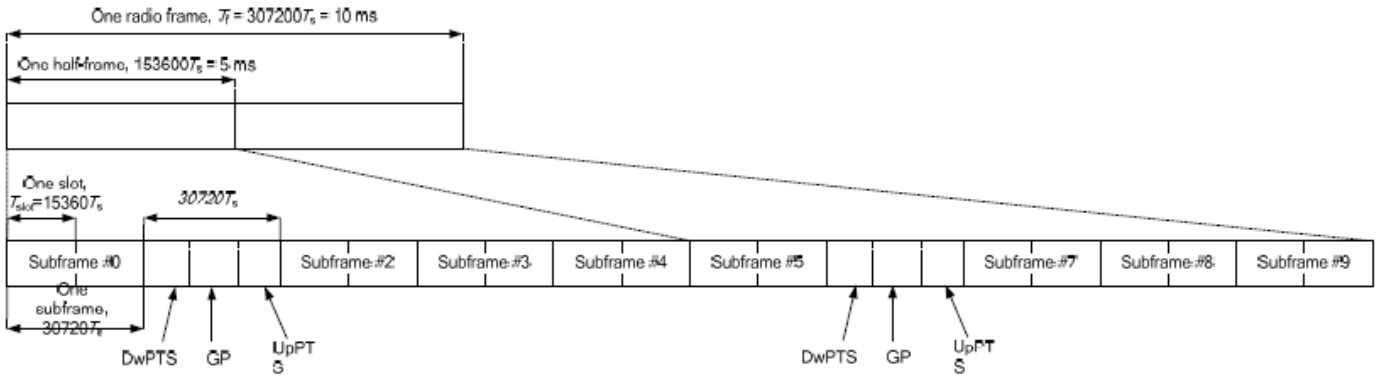


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$		
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$	-	-	-	-	-

Special subframe (30720·T_s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T_s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

- i. Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- ii. special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- iii. for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.167)/5 = 63.3\%$
- iv. for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.143)/5 = 62.9\%$
- v. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.



<Full Power Mode>

<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	22.88	22.98	22.91	24	0
20	QPSK	1	49	22.90	22.92	22.93		
20	QPSK	1	99	22.80	22.97	22.93		
20	QPSK	50	0	21.77	21.84	21.86	23	1
20	QPSK	50	24	21.76	21.84	21.86		
20	QPSK	50	50	21.80	21.86	21.86		
20	QPSK	100	0	21.77	21.85	21.85	23	1
20	16QAM	1	0	21.66	21.92	21.89		
20	16QAM	1	49	21.69	21.93	21.88		
20	16QAM	1	99	21.66	21.98	21.86	22	2
20	16QAM	50	0	20.85	20.89	20.87		
20	16QAM	50	24	20.85	20.88	20.88		
20	16QAM	50	50	20.88	20.91	20.89	22	2
20	16QAM	100	0	20.87	20.92	20.91		
20	64QAM	1	0	20.78	20.76	20.75		
20	64QAM	1	49	20.80	20.77	20.73	22	2
20	64QAM	1	99	20.89	20.78	20.75		
20	64QAM	50	0	20.00	20.04	20.04		
20	64QAM	50	24	20.02	20.05	20.07	21	3
20	64QAM	50	50	20.03	20.08	20.03		
20	64QAM	100	0	20.05	20.09	20.02		



Channel				37825	38000	38175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	22.88	22.88	22.84	24	0
15	QPSK	1	37	22.84	22.87	22.84		
15	QPSK	1	74	22.89	22.94	22.83		
15	QPSK	36	0	21.83	21.81	21.82	23	1
15	QPSK	36	20	21.83	21.83	21.80		
15	QPSK	36	39	21.85	21.84	21.79		
15	QPSK	75	0	21.83	21.82	21.80		
15	16QAM	1	0	21.73	21.74	21.88	23	1
15	16QAM	1	37	21.75	21.74	21.86		
15	16QAM	1	74	21.78	21.77	21.87		
15	16QAM	36	0	20.84	20.86	20.81	22	2
15	16QAM	36	20	20.85	20.87	20.82		
15	16QAM	36	39	20.85	20.86	20.82		
15	16QAM	75	0	20.92	20.91	20.89		
15	64QAM	1	0	20.86	20.84	20.87	22	2
15	64QAM	1	37	20.81	20.83	20.73		
15	64QAM	1	74	20.88	20.80	20.98		
15	64QAM	36	0	20.03	19.94	20.01	21	3
15	64QAM	36	20	20.04	20.00	20.00		
15	64QAM	36	39	20.03	20.06	19.94		
15	64QAM	75	0	20.05	20.03	19.95		
Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	22.84	22.91	22.93	24	0
10	QPSK	1	25	22.84	22.90	22.93		
10	QPSK	1	49	22.84	22.97	22.92		
10	QPSK	25	0	21.77	21.81	21.83	23	1
10	QPSK	25	12	21.77	21.81	21.82		
10	QPSK	25	25	21.76	21.82	21.83		
10	QPSK	50	0	21.76	21.82	21.83		
10	16QAM	1	0	21.85	21.86	21.80	23	1
10	16QAM	1	25	21.84	21.84	21.82		
10	16QAM	1	49	21.85	21.83	21.76		
10	16QAM	25	0	20.91	20.91	20.93	22	2
10	16QAM	25	12	20.90	20.92	20.92		
10	16QAM	25	25	20.89	20.93	20.94		
10	16QAM	50	0	20.84	20.88	20.89		
10	64QAM	1	0	20.76	20.76	20.82	22	2
10	64QAM	1	25	20.75	20.75	20.83		
10	64QAM	1	49	20.74	20.80	20.80		
10	64QAM	25	0	19.98	20.01	20.01	21	3
10	64QAM	25	12	19.97	20.03	20.03		
10	64QAM	25	25	19.98	20.03	20.01		
10	64QAM	50	0	20.04	20.06	20.04		



Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	22.88	22.92	22.89	24	0
5	QPSK	1	12	22.89	22.91	22.93		
5	QPSK	1	24	22.85	22.91	22.91		
5	QPSK	12	0	21.78	21.82	21.82	23	1
5	QPSK	12	7	21.80	21.82	21.85		
5	QPSK	12	13	21.77	21.83	21.83		
5	QPSK	25	0	21.79	21.83	21.83		
5	16QAM	1	0	21.68	21.86	21.77	23	1
5	16QAM	1	12	21.70	21.90	21.80		
5	16QAM	1	24	21.70	21.92	21.81		
5	16QAM	12	0	20.80	20.86	20.83	22	2
5	16QAM	12	7	20.83	20.85	20.82		
5	16QAM	12	13	20.82	20.85	20.84		
5	16QAM	25	0	20.94	20.95	20.94		
5	64QAM	1	0	20.82	20.85	20.85	22	2
5	64QAM	1	12	20.87	20.82	20.87		
5	64QAM	1	24	20.83	20.86	20.89		
5	64QAM	12	0	19.95	19.98	19.96	21	3
5	64QAM	12	7	19.94	19.97	19.96		
5	64QAM	12	13	19.94	19.97	19.94		
5	64QAM	25	0	19.99	20.01	20.02		



<LTE Band 41>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Low Ch. / Freq.	Power Middle High Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				40140	40400	40670	41140		
Frequency (MHz)				2545	2571	2598	2645		
20	QPSK	1	0	22.64	22.70	22.81	23.20	24	0
20	QPSK	1	49	22.68	22.68	22.81	22.96		
20	QPSK	1	99	22.72	22.68	22.85	22.98		
20	QPSK	50	0	21.59	21.72	21.78	22.00	23	1
20	QPSK	50	24	21.58	21.74	21.80	21.91		
20	QPSK	50	50	21.60	21.72	21.83	21.92		
20	QPSK	100	0	21.61	21.72	21.78	21.92	23	1
20	16QAM	1	0	21.70	21.90	21.94	22.14		
20	16QAM	1	49	21.73	21.91	21.94	22.13		
20	16QAM	1	99	21.73	21.90	21.97	22.14	22	2
20	16QAM	50	0	20.66	20.79	20.85	20.98		
20	16QAM	50	24	20.64	20.79	20.87	20.97		
20	16QAM	50	50	20.65	20.79	20.89	20.96	22	2
20	16QAM	100	0	20.71	20.81	20.88	20.98		
20	64QAM	1	0	20.80	20.73	20.96	21.23		
20	64QAM	1	49	20.80	20.82	20.97	21.21	22	2
20	64QAM	1	99	20.82	20.81	20.99	21.22		
20	64QAM	50	0	20.04	20.17	20.23	20.34		
20	64QAM	50	24	20.11	20.15	20.22	20.34	21	3
20	64QAM	50	50	19.93	20.15	20.23	20.31		
20	64QAM	100	0	20.03	20.17	20.23	20.33		



Channel				40115	40395	40685	41165	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2542.5	2570.5	2599.5	2647.5		
15	QPSK	1	0	22.61	22.74	22.83	23.02	24	0
15	QPSK	1	37	22.59	22.72	22.82	22.97		
15	QPSK	1	74	22.62	22.69	22.88	22.97		
15	QPSK	36	0	21.59	21.71	21.81	21.98	23	1
15	QPSK	36	20	21.59	21.74	21.84	21.97		
15	QPSK	36	39	21.58	21.75	21.84	21.95		
15	QPSK	75	0	21.59	21.73	21.79	21.96		
15	16QAM	1	0	21.62	21.69	21.94	22.29	23	1
15	16QAM	1	37	21.63	21.66	21.98	22.23		
15	16QAM	1	74	21.69	21.67	22.02	22.26		
15	16QAM	36	0	20.64	20.80	20.87	21.00	22	2
15	16QAM	36	20	20.64	20.81	20.88	20.99		
15	16QAM	36	39	20.65	20.81	20.87	20.98		
15	16QAM	75	0	20.68	20.87	20.94	21.02		
15	64QAM	1	0	20.91	20.97	21.10	21.09	22	2
15	64QAM	1	37	20.92	20.98	21.09	21.12		
15	64QAM	1	74	20.89	20.97	21.16	21.07		
15	64QAM	36	0	20.02	20.18	20.29	20.35	21	3
15	64QAM	36	20	20.01	20.19	20.30	20.38		
15	64QAM	36	39	20.01	20.20	20.31	20.37		
15	64QAM	75	0	19.98	20.15	20.26	20.38		
Channel				40090	40390	40690	41190	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2540	2570	2600	2650		
10	QPSK	1	0	22.79	22.92	23.03	23.12	24	0
10	QPSK	1	25	22.81	22.92	23.08	23.10		
10	QPSK	1	49	22.90	22.93	23.13	23.04		
10	QPSK	25	0	21.73	21.86	21.95	22.09	23	1
10	QPSK	25	12	21.71	21.85	21.96	22.08		
10	QPSK	25	25	21.71	21.88	21.96	22.07		
10	QPSK	50	0	21.72	21.86	21.94	22.08		
10	16QAM	1	0	21.95	21.99	22.06	22.29	23	1
10	16QAM	1	25	21.96	21.97	22.07	22.29		
10	16QAM	1	49	22.05	21.98	22.08	22.26		
10	16QAM	25	0	20.85	21.03	21.07	21.17	22	2
10	16QAM	25	12	20.84	21.02	21.09	21.17		
10	16QAM	25	25	20.83	21.01	21.09	21.16		
10	16QAM	50	0	20.79	20.93	21.02	21.07		
10	64QAM	1	0	20.95	21.03	21.19	21.35	22	2
10	64QAM	1	25	21.01	21.02	21.22	21.32		
10	64QAM	1	49	20.96	21.02	21.25	21.33		
10	64QAM	25	0	20.13	20.25	20.33	20.45	21	3
10	64QAM	25	12	20.10	20.23	20.35	20.44		
10	64QAM	25	25	20.13	20.23	20.37	20.45		
10	64QAM	50	0	20.14	20.28	20.38	20.47		



Channel				40065	40385	40705	41215	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2537.5	2569.5	2601.5	2652.5		
5	QPSK	1	0	22.80	22.95	23.10	23.12	24	0
5	QPSK	1	12	22.81	22.95	23.13	23.11		
5	QPSK	1	24	22.77	22.93	23.11	22.73		
5	QPSK	12	0	21.75	21.90	21.97	21.90	23	1
5	QPSK	12	7	21.69	21.88	21.97	22.09		
5	QPSK	12	13	21.73	21.87	21.98	22.11		
5	QPSK	25	0	21.73	21.88	21.97	22.10		
5	16QAM	1	0	21.61	21.88	21.88	22.21	23	1
5	16QAM	1	12	21.61	21.93	21.91	22.23		
5	16QAM	1	24	21.62	21.92	21.92	22.20		
5	16QAM	12	0	20.75	20.94	21.01	21.10	22	2
5	16QAM	12	7	20.76	20.92	21.01	21.10		
5	16QAM	12	13	20.74	20.93	21.03	21.08		
5	16QAM	25	0	20.87	21.00	21.09	21.17		
5	64QAM	1	0	21.00	21.03	21.15	21.42	22	2
5	64QAM	1	12	21.06	21.09	21.18	21.38		
5	64QAM	1	24	21.01	21.04	21.20	21.39		
5	64QAM	12	0	20.05	20.22	20.34	20.40	21	3
5	64QAM	12	7	20.07	20.23	20.32	20.40		
5	64QAM	12	13	20.06	20.22	20.32	20.40		
5	64QAM	25	0	20.12	20.25	20.38	20.45		



<Reduced Power Mode for Hotspot On>

<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	20.80	20.92	20.80	21	0
20	QPSK	1	49	20.81	20.98	20.84		
20	QPSK	1	99	20.82	20.94	20.82		
20	QPSK	50	0	20.79	20.79	20.80	21	0
20	QPSK	50	24	20.79	20.80	20.78		
20	QPSK	50	50	20.78	20.80	20.78		
20	QPSK	100	0	20.79	20.79	20.76		
20	16QAM	1	0	20.84	20.85	20.88	21	0
20	16QAM	1	49	20.80	20.83	20.90		
20	16QAM	1	99	20.84	20.87	20.86		
20	16QAM	50	0	20.82	20.84	20.87	21	0
20	16QAM	50	24	20.83	20.84	20.88		
20	16QAM	50	50	20.85	20.84	20.88		
20	16QAM	100	0	20.84	20.83	20.87		
20	64QAM	1	0	20.60	20.52	20.62	21	0
20	64QAM	1	49	20.60	20.50	20.57		
20	64QAM	1	99	20.60	20.56	20.57		
20	64QAM	50	0	20.06	20.06	20.10	21	0
20	64QAM	50	24	20.03	20.05	20.10		
20	64QAM	50	50	20.06	20.06	20.10		
20	64QAM	100	0	20.07	20.10	20.08		



Channel				37825	38000	38175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	20.84	20.77	20.77	21	0
15	QPSK	1	37	20.83	20.80	20.78		
15	QPSK	1	74	20.84	20.84	20.79		
15	QPSK	36	0	20.81	20.78	20.75	21	0
15	QPSK	36	20	20.79	20.76	20.75		
15	QPSK	36	39	20.79	20.79	20.73		
15	QPSK	75	0	20.81	20.77	20.72		
15	16QAM	1	0	20.82	20.82	20.78	21	0
15	16QAM	1	37	20.81	20.82	20.81		
15	16QAM	1	74	20.87	20.88	20.76		
15	16QAM	36	0	20.84	20.79	20.78	21	0
15	16QAM	36	20	20.84	20.79	20.78		
15	16QAM	36	39	20.84	20.81	20.78		
15	16QAM	75	0	20.88	20.82	20.80		
15	64QAM	1	0	20.62	20.55	20.63	21	0
15	64QAM	1	37	20.59	20.58	20.63		
15	64QAM	1	74	20.65	20.55	20.63		
15	64QAM	36	0	20.06	20.02	20.02	21	0
15	64QAM	36	20	20.05	20.02	20.01		
15	64QAM	36	39	20.05	20.04	20.01		
15	64QAM	75	0	20.05	20.02	20.03		
Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	20.87	20.84	20.86	21	0
10	QPSK	1	25	20.86	20.85	20.86		
10	QPSK	1	49	20.85	20.88	20.84		
10	QPSK	25	0	20.83	20.80	20.78	21	0
10	QPSK	25	12	20.80	20.78	20.77		
10	QPSK	25	25	20.81	20.80	20.77		
10	QPSK	50	0	20.82	20.81	20.79		
10	16QAM	1	0	20.88	20.97	20.87	21	0
10	16QAM	1	25	20.86	20.95	20.83		
10	16QAM	1	49	20.81	20.97	20.81		
10	16QAM	25	0	20.88	20.88	20.89	21	0
10	16QAM	25	12	20.87	20.87	20.89		
10	16QAM	25	25	20.86	20.89	20.88		
10	16QAM	50	0	20.85	20.87	20.86		
10	64QAM	1	0	20.63	20.60	20.53	21	0
10	64QAM	1	25	20.59	20.55	20.48		
10	64QAM	1	49	20.62	20.53	20.49		
10	64QAM	25	0	20.03	20.02	20.04	21	0
10	64QAM	25	12	20.03	20.04	20.03		
10	64QAM	25	25	20.02	20.03	20.04		
10	64QAM	50	0	20.04	20.08	20.07		



Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	20.86	20.78	20.81	21	0
5	QPSK	1	12	20.87	20.79	20.78		
5	QPSK	1	24	20.84	20.79	20.76		
5	QPSK	12	0	20.80	20.71	20.71	21	0
5	QPSK	12	7	20.80	20.73	20.71		
5	QPSK	12	13	20.80	20.76	20.71		
5	QPSK	25	0	20.78	20.72	20.69		
5	16QAM	1	0	20.75	20.55	20.71	21	0
5	16QAM	1	12	20.76	20.57	20.74		
5	16QAM	1	24	20.77	20.57	20.73		
5	16QAM	12	0	20.75	20.73	20.76	21	0
5	16QAM	12	7	20.77	20.74	20.75		
5	16QAM	12	13	20.73	20.74	20.76		
5	16QAM	25	0	20.85	20.84	20.81		
5	64QAM	1	0	20.62	20.63	20.73	21	0
5	64QAM	1	12	20.62	20.65	20.72		
5	64QAM	1	24	20.66	20.64	20.68		
5	64QAM	12	0	19.92	19.91	19.91	21	0
5	64QAM	12	7	19.92	19.92	19.90		
5	64QAM	12	13	19.94	19.91	19.92		
5	64QAM	25	0	19.98	19.96	19.98		



<LTE Band 41>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Low Ch. / Freq.	Power Middle High Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				40140	40400	40670	41140		
Frequency (MHz)				2545	2571	2598	2645		
20	QPSK	1	0	19.81	20.04	20.05	20.13	21	0
20	QPSK	1	49	19.86	20.06	19.97	20.11		
20	QPSK	1	99	19.83	20.08	19.98	20.10		
20	QPSK	50	0	19.76	20.00	19.96	20.07	21	0
20	QPSK	50	24	19.75	20.00	19.86	20.04		
20	QPSK	50	50	19.75	19.96	19.89	20.03		
20	QPSK	100	0	19.76	19.98	19.87	20.03		
20	16QAM	1	0	19.94	20.10	19.93	20.05	21	0
20	16QAM	1	49	19.92	20.06	20.02	19.99		
20	16QAM	1	99	19.90	20.04	19.99	19.99		
20	16QAM	50	0	19.82	20.03	19.94	20.11	21	0
20	16QAM	50	24	19.83	20.03	19.93	20.09		
20	16QAM	50	50	19.80	20.04	19.96	20.11		
20	16QAM	100	0	19.84	20.04	19.94	20.10		
20	64QAM	1	0	19.66	19.85	19.73	19.94	21	0
20	64QAM	1	49	19.69	19.89	19.74	19.90		
20	64QAM	1	99	19.63	19.86	19.78	19.90		
20	64QAM	50	0	19.35	19.56	19.47	19.53	21	0
20	64QAM	50	24	19.34	19.56	19.49	19.60		
20	64QAM	50	50	19.35	19.57	19.49	19.58		
20	64QAM	100	0	19.36	19.59	19.49	19.59		



FCC SAR Test Report

Report No. : FA8D2002-01

Channel				40115	40395	40685	41165	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2542.5	2570.5	2599.5	2647.5		
15	QPSK	1	0	19.81	20.03	20.08	20.10	21	0
15	QPSK	1	37	19.83	20.03	20.09	20.10		
15	QPSK	1	74	19.76	19.94	19.93	20.05		
15	QPSK	36	0	19.74	19.96	19.86	20.04	21	0
15	QPSK	36	20	19.75	19.98	19.86	20.04		
15	QPSK	36	39	19.76	19.97	19.88	20.03		
15	QPSK	75	0	19.75	19.96	19.86	20.04		
15	16QAM	1	0	19.87	20.07	19.91	20.09	21	0
15	16QAM	1	37	19.87	20.09	19.96	20.03		
15	16QAM	1	74	19.79	20.07	20.01	19.99		
15	16QAM	36	0	19.75	19.99	19.88	20.06	21	0
15	16QAM	36	20	19.75	19.99	19.88	20.05		
15	16QAM	36	39	19.73	19.99	19.90	20.04		
15	16QAM	75	0	19.83	20.05	19.97	20.05		
15	64QAM	1	0	19.66	19.71	19.59	19.97	21	0
15	64QAM	1	37	19.64	19.72	19.87	19.95		
15	64QAM	1	74	19.65	19.67	19.79	19.93		
15	64QAM	36	0	19.32	19.53	19.35	19.58	21	0
15	64QAM	36	20	19.32	19.51	19.43	19.58		
15	64QAM	36	39	19.28	19.48	19.36	19.54		
15	64QAM	75	0	19.27	19.51	19.38	19.55		
Channel				40090	40390	40690	41190	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2540	2570	2600	2650		
10	QPSK	1	0	19.86	20.08	19.96	20.12	21	0
10	QPSK	1	25	19.87	20.10	19.99	20.11		
10	QPSK	1	49	19.87	20.09	20.01	20.10		
10	QPSK	25	0	19.76	19.99	19.87	20.04	21	0
10	QPSK	25	12	19.76	19.98	19.87	20.03		
10	QPSK	25	25	19.77	19.98	19.88	20.04		
10	QPSK	50	0	19.77	19.98	19.87	20.05		
10	16QAM	1	0	19.91	20.05	19.85	20.09	21	0
10	16QAM	1	25	19.88	20.06	19.89	20.10		
10	16QAM	1	49	19.86	20.02	19.87	20.09		
10	16QAM	25	0	19.93	20.10	20.00	20.05	21	0
10	16QAM	25	12	19.92	20.09	20.00	20.12		
10	16QAM	25	25	19.90	20.09	20.01	20.11		
10	16QAM	50	0	19.84	20.06	19.94	20.10		
10	64QAM	1	0	19.76	19.83	19.78	19.92	21	0
10	64QAM	1	25	19.71	19.84	19.82	19.89		
10	64QAM	1	49	19.73	19.83	19.82	19.86		
10	64QAM	25	0	19.35	19.54	19.42	19.59	21	0
10	64QAM	25	12	19.33	19.53	19.41	19.59		
10	64QAM	25	25	19.32	19.52	19.43	19.58		
10	64QAM	50	0	19.35	19.57	19.44	19.61		



Channel				40065	40385	40705	41215	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2537.5	2569.5	2601.5	2652.5		
5	QPSK	1	0	19.83	20.05	19.94	20.10	21	0
5	QPSK	1	12	19.81	20.03	19.90	20.07		
5	QPSK	1	24	19.77	20.03	19.89	20.04		
5	QPSK	12	0	19.75	20.01	19.89	20.05	21	0
5	QPSK	12	7	19.76	20.01	19.89	20.06		
5	QPSK	12	13	19.76	20.01	19.89	20.08		
5	QPSK	25	0	19.75	20.00	19.89	20.05		
5	16QAM	1	0	19.73	19.95	19.93	20.01	21	0
5	16QAM	1	12	19.76	19.94	19.94	20.01		
5	16QAM	1	24	19.76	19.95	19.97	20.01		
5	16QAM	12	0	19.78	20.05	19.90	20.08	21	0
5	16QAM	12	7	19.80	20.02	19.90	20.06		
5	16QAM	12	13	19.78	20.04	19.90	20.05		
5	16QAM	25	0	19.85	20.12	20.00	20.04		
5	64QAM	1	0	19.63	19.90	19.62	19.91	21	0
5	64QAM	1	12	19.64	19.87	19.64	19.97		
5	64QAM	1	24	19.64	19.87	19.64	19.94		
5	64QAM	12	0	19.23	19.48	19.36	19.56	21	0
5	64QAM	12	7	19.23	19.46	19.37	19.56		
5	64QAM	12	13	19.23	19.47	19.36	19.54		
5	64QAM	25	0	19.29	19.52	19.38	19.58		



<LTE Carrier Aggregation>

General Note:

- 1. This device supports Carrier Aggregation on downlink for intra band, uplink CA is not supported. For the device supports bands and bandwidths and configurations are provided as follow table was according to 3GPP.
- 2. In applying the existing power measurement procedures of KDB 941225 D05A for DL CA SAR test exclusion, only the subset with the largest number of combinations of frequency bands and CCs in each row need combination, and for this device that all the configurations were choose to power measurement.

Index	2CC
2CC #1	CA_7B
2CC #2	CA_7C
2CC #3	CA_41C
2CC #4	CA_7A-7A
2CC #5	CA_41A-41A

LTE Carrier Aggregation Conducted Power (Downlink)

- i. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device supports downlink two carrier aggregation. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band.
- vi. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1|BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

<Full Power Mode>

Configure		CA Configuration (BCS)	PCC						SCC				Power		
			LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx. Power (dBm)	Without CA Tx. Power (dBm)
Intra-Band	Contiguous	CA_7B	Band 7	15M	2562.5	21375	QPSK	1	0	Band 7	5M	2678.2	3332	22.88	22.91
		CA_7C	Band 7	20M	2560	21350	QPSK	1	0	Band 7	20M	2660.2	3152	22.85	22.97
		CA_41C	Band 41	20M	2645	41140	QPSK	1	0	Band 41	20M	2625.2	40942	23.19	23.20
	Non-Contiguous	CA_7A-7A	Band 7	20M	2560	21350	QPSK	1	0	Band 7	5M	2622.5	2775	22.88	22.97
		CA_41A-41A	Band 41	20M	2645	41140	QPSK	1	0	Band 41	5M	2537.5	40065	23.16	23.20

<Reduced Power Mode for P-Sensor On>

Configure		CA Configuration (BCS)	PCC						SCC				Power		
			LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx. Power (dBm)	Without CA Tx. Power (dBm)
Intra-Band	Contiguous	CA_7B	Band 7	15M	2562.5	21375	16QAM	1	37	Band 7	5M	2678.2	3332	22.08	22.13
		CA_7C	Band 7	20M	2535	21100	QPSK	1	0	Band 7	20M	2674.8	3298	22.15	22.10
	Non-Contiguous	CA_7A-7A	Band 7	20M	2535	21100	QPSK	1	0	Band 7	5M	2687.5	3425	22.08	22.10

<Reduced Power Mode for Hotspot On>

Configure		CA Configuration (BCS)	PCC						SCC				Power		
			LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx. Power (dBm)	Without CA Tx. Power (dBm)
Intra-Band	Contiguous	CA_7B	Band 7	15M	2562.5	21375	16QAM	1	74	Band 7	5M	2678.2	3332	17.49	17.48
		CA_7C	Band 7	20M	2535	21100	QPSK	1	0	Band 7	20M	2674.8	3298	17.51	17.57
		CA_41C	Band 41	20M	2645	41140	QPSK	1	0	Band 41	20M	2625.2	40942	20.12	20.13
	Non-Contiguous	CA_7A-7A	Band 7	20M	2535	21100	QPSK	1	0	Band 7	5M	2687.5	3425	17.51	17.57
		CA_41A-41A	Band 41	20M	2645	41140	QPSK	1	0	Band 41	5M	2537.5	40065	20.15	20.13

<Reduced Power Mode for Handheld On>

Configure		CA Configuration (BCS)	PCC						SCC				Power		
			LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx. Power (dBm)	Without CA Tx. Power (dBm)
Intra-Band	Contiguous	CA_7B	Band 7	15M	2535	21100	64QAM	1	74	Band 7	5M	2664.3	3193	21.61	21.67
		CA_7C	Band 7	20M	2560	21350	64QAM	1	99	Band 7	20M	2660.2	3152	21.70	21.72
	Non-Contiguous	CA_7A-7A	Band 7	20M	2560	21350	64QAM	1	99	Band 7	5M	2622.5	2775	21.75	21.72



<WLAN Conducted Power>

General Note:

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

<Full Power Mode>

<2.4GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	17.99	18.50	100
		6	2437	17.88	18.50	
		11	2462	17.60	18.50	
	802.11g 6Mbps	1	2412	17.90	18.50	96.10
		6	2437	17.43	18.50	
		11	2462	17.09	18.50	
	802.11n-HT20 MCS0	1	2412	17.99	18.50	95.34
		6	2437	17.36	18.50	
		11	2462	17.11	18.50	

<5GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	18.26	19.00	95.17
		40	5200	17.90	19.00	
		44	5220	18.07	19.00	
		48	5240	18.05	19.00	
	802.11n-HT20 MCS0	36	5180	18.38	19.00	94.87
		40	5200	18.02	19.00	
		44	5220	18.05	19.00	
		48	5240	18.25	19.00	
	802.11n-HT40 MCS0	38	5190	17.03	18.00	88.10
		46	5230	16.93	18.00	
	802.11ac-VHT20 MCS0	36	5180	18.34	19.00	95.65
		40	5200	17.95	19.00	
		44	5220	18.05	19.00	
		48	5240	18.30	19.00	
	802.11ac-VHT40 MCS0	38	5190	17.02	18.00	87.79
		46	5230	16.95	18.00	
802.11ac-VHT80 MCS0	42	5210	11.13	12.00	76.35	



	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	18.19	19.00	95.17
		56	5280	18.50	19.00	
		60	5300	18.57	19.00	
		64	5320	18.58	19.00	
	802.11n-HT20 MCS0	52	5260	18.30	19.00	94.87
		56	5280	18.68	19.00	
		60	5300	18.57	19.00	
		64	5320	18.65	19.00	
	802.11n-HT40 MCS0	54	5270	17.07	18.00	88.10
		62	5310	17.34	18.00	
	802.11ac-VHT20 MCS0	52	5260	18.40	19.00	95.65
		56	5280	18.57	19.00	
		60	5300	18.60	19.00	
		64	5320	18.62	19.00	
	802.11ac-VHT40 MCS0	54	5270	17.25	18.00	87.79
		62	5310	17.32	18.00	
802.11ac-VHT80 MCS0	58	5290	12.38	13.00	76.35	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11a 6Mbps	100	5500	17.87	19.50	95.17
		116	5580	18.87	19.50	
		124	5620	19.07	19.50	
		132	5660	19.17	19.50	
		140	5700	18.77	19.50	
		144	5720	18.17	19.50	
	802.11n-HT20 MCS0	100	5500	18.06	19.50	94.87
		116	5580	18.99	19.50	
		124	5620	19.19	19.50	
		132	5660	19.44	19.50	
		140	5700	18.97	19.50	
		144	5720	18.60	19.50	
	802.11n-HT40 MCS0	102	5510	16.69	18.00	88.10
		110	5550	17.09	18.00	
		126	5630	17.83	18.00	
		134	5670	17.53	18.00	
		142	5710	17.26	18.00	
	802.11ac-VHT20 MCS0	100	5500	17.93	19.50	95.65
		116	5580	18.82	19.50	
		124	5620	19.35	19.50	
		132	5660	19.40	19.50	
		140	5700	18.91	19.50	
		144	5720	18.78	19.50	
	802.11ac-VHT40 MCS0	102	5510	16.71	18.00	87.79
		110	5550	17.30	18.00	
		126	5630	17.80	18.00	
		134	5670	17.39	18.00	
142		5710	17.28	18.00		
802.11ac-VHT80 MCS0	106	5530	14.34	15.00	76.35	
	122	5610	16.55	17.00		
	138	5690	16.59	17.00		



	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a MCS0	149	5745	17.87	19.00	95.17
		157	5785	18.24	19.00	
		165	5825	18.30	19.00	
	802.11n-HT20 MCS0	149	5745	18.30	19.00	94.87
		157	5785	18.32	19.00	
		165	5825	18.29	19.00	
	802.11n-HT40 MCS0	151	5755	16.83	18.00	88.10
		159	5795	17.06	18.00	
	802.11ac-VHT20 MCS0	149	5745	18.10	19.00	95.65
		157	5785	18.41	19.00	
		165	5825	18.30	19.00	
	802.11ac-VHT40 MCS0	151	5755	16.65	18.00	87.79
		159	5795	17.03	18.00	
	802.11ac-VHT80 MCS0	155	5775	15.13	16.00	76.35



<Reduced Power Mode for Receiver On>


<2.4GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	16.86	17.50	100
		6	2437	15.82	16.50	
		11	2462	15.81	16.50	
	802.11g 6Mbps	1	2412	17.03	17.50	96.10
		6	2437	16.43	17.50	
		11	2462	16.04	17.50	
	802.11n-HT20 MCS0	1	2412	16.95	17.50	95.34
		6	2437	16.35	17.50	
		11	2462	16.10	17.50	

<2.4GHz Bluetooth>

General Note:

1. For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.
2. The Bluetooth duty cycle is 76.91 % as following figure, according to 2016 Oct. TCB workshop for Bluetooth SAR scaling need further consideration and the theoretical duty cycle is 83.3%, therefore the actual duty cycle will be scaled up to the theoretical value of Bluetooth reported SAR calculation

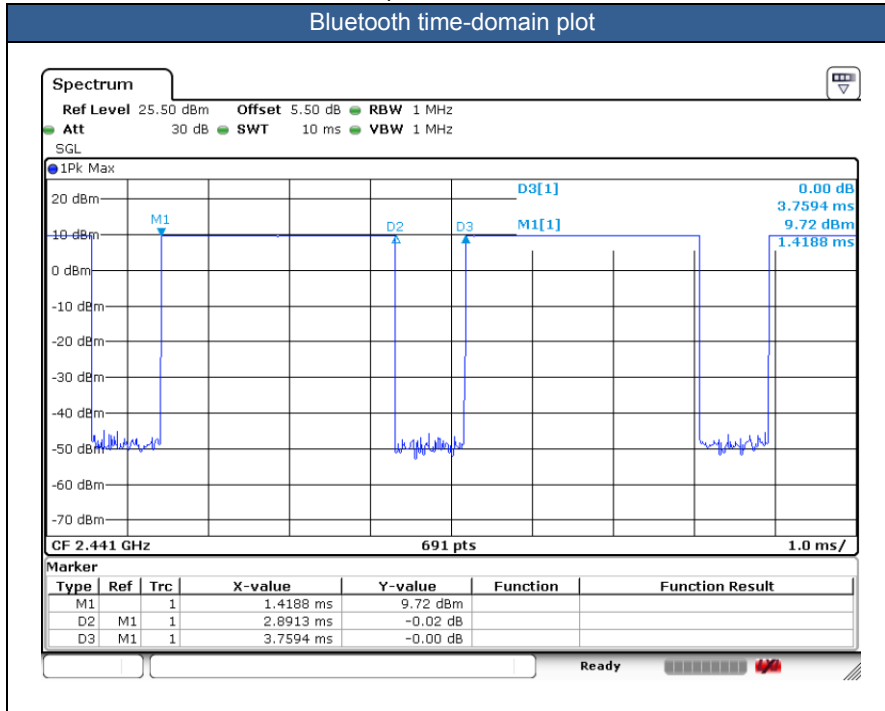


Mode	Channel	Frequency (MHz)	Average power (dBm)
			1Mbps
BR/EDR	CH 00	2402	8.99
	CH 39	2441	9.89
	CH 78	2480	8.49
Tune-up limit (dBm)			10.00

Mode	Channel	Frequency (MHz)	Average power (dBm)
			GFSK
v4.2 LE	CH 00	2402	9.85
	CH 19	2440	9.82
	CH 39	2480	9.83
Tune-up Limit			10.00

Mode	Channel	Frequency (MHz)	Average power (dBm)
			GFSK
v5.0 LE	CH 00	2402	9.47
	CH 19	2440	9.41
	CH 39	2480	8.99
Tune-up Limit			10.00

14. Antenna Location

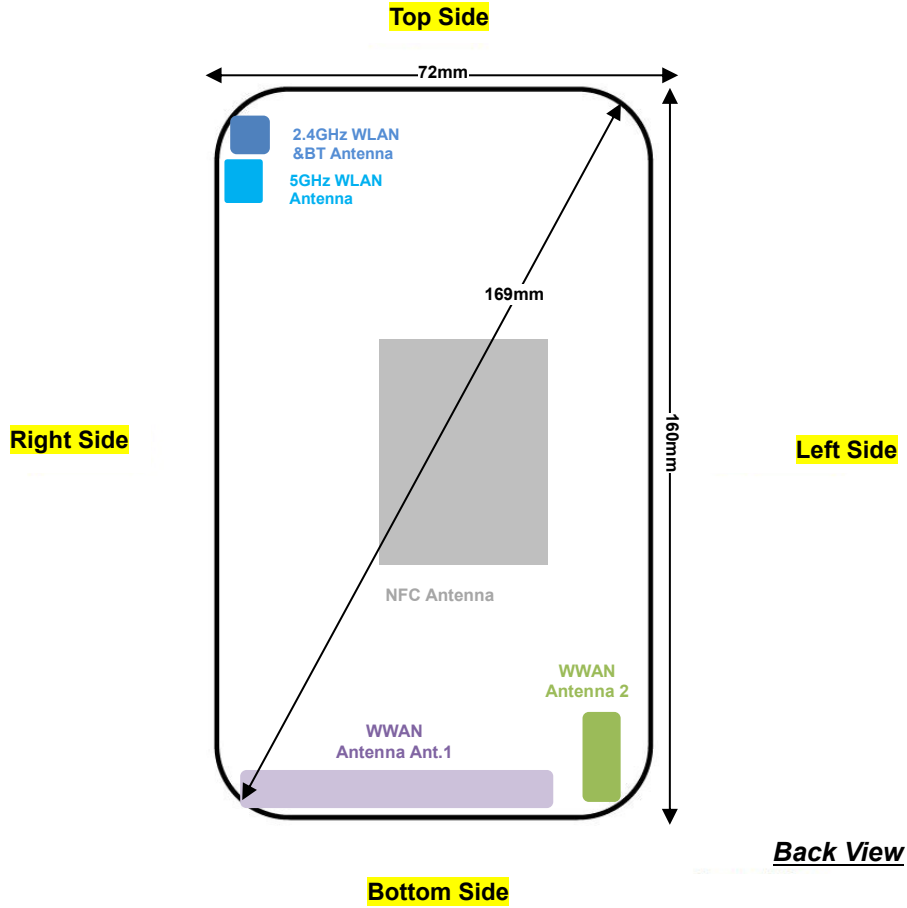

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Antenna 1	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	≤ 25mm
WWAN Antenna 2	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm	≤ 25mm
2.4GHz WLAN & BT	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm
5GHz WLAN	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Antenna 1	Yes	Yes	No	Yes	Yes	Yes
WWAN Antenna 2	Yes	Yes	No	Yes	No	Yes
2.4GHz WLAN & BT	Yes	Yes	Yes	No	Yes	No
5GHz WLAN	Yes	Yes	Yes	No	Yes	No

General Note:

1. This device has two WWAN transmitter antennas. WWAN antenna 1 is located at the right of bottom edge of the device and WWAN antenna 2 is located at the left side of bottom edge of the device which can refer to antenna location chapter. WWAN antenna 1 frequency bands include GSM850/1900, WCDMA Band II/V and LTE Band 5, WWAN antenna 2 frequency band only include LTE Band 7/38/41.
2. Referring to KDB 941225 D06 v02r01, when the overall device length and width are ≥ 9cm*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.



15. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For BT/WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is ≥ 0.8 W/kg. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. Pre KDB648474 D04v01r03, when the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.
5. The device employs proximity sensors that detect the presence of the user's body at the front or back faces of the device. When front or back body worn condition is detected, GSM850, WCDMA band II/V and LTE band 5/7 reduced power will be active. (P-sensor can't work at detecting presence of the user's body at the four edges of the device.)
6. When hotspot mode is enabled, power reduction will be activated to limit the maximum power of GSM850/1900, WCDMA band II/V and LTE band 5/7/38/41.
7. This device hotspot reduced power and P-sensor reduced power level are the same for GSM850, WCDMA Band V and LTE Band 5. And for other Bands are different.
8. For P-sensor reduced power level is higher than hotspot reduced power for WCDMA band II and LTE band 7, so for front/back P-sensor SAR can represent conservatively for front/back hotspot SAR.
9. For full power level is higher than hotspot reduced power for GSM1900, and LTE band 38/41, so for front/back full power SAR can represent conservatively for front/back hotspot SAR.
10. P-sensor can detect handheld state, WCDMA band II and LTE band 7 for front/back/bottom sides of product specific 10g SAR condition reduced powers will be active.
11. This device has two WWAN transmitter antennas. WWAN antenna 1 is located at the right of bottom edge of the device and WWAN antenna 2 is located at the left side of bottom edge of the device which can refer to antenna location chapter. WWAN antenna 1 frequency bands include GSM850/1900, WCDMA Band II/V and LTE Band 5, WWAN antenna 2 frequency bands include LTE Band 7/38/41.
12. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power (for handheld on state, the maximum full power means reduced power), including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.
 - a. For this device SAR for WWAN transmitter scaled to maximum output power mode for product specific 10g SAR is higher than 1.2W/kg of GSM850/1900, WCDMA Band II/V, LTE Band 5/7/41, therefore product specific 10g SAR is necessary.
 - b. WLAN 5.3/5.5GHz tested the product specific 10g SAR since it has no hotspot mode.
 - c. When 10-g product specific 10g SAR is considered, SAR thresholds is specified in the procedures for SAR test reduction and exclusion should be multiplied by 2.5.

GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS 3Tx slots for GSM850/GSM1900 are considered as the primary mode.
2. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.
3. Power reduction which is triggered by hotspot mode are implemented in GSM850/1900 band, for SAR testing EUT was set in reduced power mode and GPRS 3Tx slots due to its highest frame-average power.
4. Power reduction which is triggered by p-sensor on are implemented in GSM850 band, for SAR testing EUT was set in reduced power mode and GPRS 3Tx slots due to its highest frame-average power.

WCDMA Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B5 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE B38 SAR test was covered by B41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - c. the maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion
 - d. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band



WLAN Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.



15.1 Head SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
01	GSM850	GPRS 3 Tx slots	Right Cheek	Full	251	848.8	29.38	30.00	1.153	-0.01	0.353	0.407
	GSM850	GPRS 3 Tx slots	Right Tilted	Full	251	848.8	29.38	30.00	1.153	-0.1	0.129	0.149
	GSM850	GPRS 3 Tx slots	Left Cheek	Full	251	848.8	29.38	30.00	1.153	-0.09	0.268	0.309
	GSM850	GPRS 3 Tx slots	Left Tilted	Full	251	848.8	29.38	30.00	1.153	0.15	0.143	0.165
	GSM1900	GPRS 3 Tx slots	Right Cheek	Full	810	1909.8	26.14	27.00	1.219	0.04	0.037	0.045
	GSM1900	GPRS 3 Tx slots	Right Tilted	Full	810	1909.8	26.14	27.00	1.219	0.05	0.033	0.040
02	GSM1900	GPRS 3 Tx slots	Left Cheek	Full	810	1909.8	26.14	27.00	1.219	-0.06	0.063	0.077
	GSM1900	GPRS 3 Tx slots	Left Tilted	Full	810	1909.8	26.14	27.00	1.219	0.05	0.022	0.027

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
03	WCDMA Band V	RMC 12.2Kbps	Right Cheek	Full	4132	826.4	23.37	24.00	1.156	0.07	0.264	0.305
	WCDMA Band V	RMC 12.2Kbps	Right Tilted	Full	4132	826.4	23.37	24.00	1.156	0.01	0.113	0.131
	WCDMA Band V	RMC 12.2Kbps	Left Cheek	Full	4132	826.4	23.37	24.00	1.156	-0.07	0.216	0.250
	WCDMA Band V	RMC 12.2Kbps	Left Tilted	Full	4132	826.4	23.37	24.00	1.156	0.01	0.126	0.146
	WCDMA Band II	RMC 12.2Kbps	Right Cheek	Full	9538	1907.6	23.30	24.00	1.175	0.11	0.079	0.093
	WCDMA Band II	RMC 12.2Kbps	Right Tilted	Full	9538	1907.6	23.30	24.00	1.175	0.03	0.050	0.058
04	WCDMA Band II	RMC 12.2Kbps	Left Cheek	Full	9538	1907.6	23.30	24.00	1.175	0.06	0.113	0.133
	WCDMA Band II	RMC 12.2Kbps	Left Tilted	Full	9538	1907.6	23.30	24.00	1.175	0.19	0.031	0.036



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
05	LTE Band 5	10M	QPSK	1	0	Right Cheek	Full	20525	836.5	22.97	24.00	1.268	0.06	0.241	0.306
	LTE Band 5	10M	QPSK	25	0	Right Cheek	Full	20525	836.5	21.84	23.00	1.306	0.01	0.194	0.253
	LTE Band 5	10M	QPSK	1	0	Right Tilted	Full	20525	836.5	22.97	24.00	1.268	0.01	0.096	0.121
	LTE Band 5	10M	QPSK	25	0	Right Tilted	Full	20525	836.5	21.84	23.00	1.306	0.01	0.078	0.102
	LTE Band 5	10M	QPSK	1	0	Left Cheek	Full	20525	836.5	22.97	24.00	1.268	0.06	0.194	0.246
	LTE Band 5	10M	QPSK	25	0	Left Cheek	Full	20525	836.5	21.84	23.00	1.306	0.01	0.158	0.206
	LTE Band 5	10M	QPSK	1	0	Left Tilted	Full	20525	836.5	22.97	24.00	1.268	0.01	0.106	0.134
	LTE Band 5	10M	QPSK	25	0	Left Tilted	Full	20525	836.5	21.84	23.00	1.306	0.01	0.091	0.119
	LTE Band 7	20M	QPSK	1	0	Right Cheek	Full	21350	2560	22.97	24.00	1.268	0.05	0.135	0.171
	LTE Band 7	20M	QPSK	50	50	Right Cheek	Full	21350	2560	21.88	23.00	1.294	0.02	0.122	0.158
	LTE Band 7	20M	QPSK	1	0	Right Tilted	Full	21350	2560	22.97	24.00	1.268	-0.13	0.120	0.152
	LTE Band 7	20M	QPSK	50	50	Right Tilted	Full	21350	2560	21.88	23.00	1.294	-0.07	0.098	0.127
06	LTE Band 7	20M	QPSK	1	0	Left Cheek	Full	21350	2560	22.97	24.00	1.268	-0.18	0.139	0.176
	LTE Band 7	20M	QPSK	50	50	Left Cheek	Full	21350	2560	21.88	23.00	1.294	0.05	0.102	0.132
	LTE Band 7	20M	QPSK	1	0	Left Tilted	Full	21350	2560	22.97	24.00	1.268	0.02	0.032	0.040
	LTE Band 7	20M	QPSK	50	50	Left Tilted	Full	21350	2560	21.88	23.00	1.294	-0.15	0.022	0.028

<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	0	Right Cheek	Full	41140	2645	23.20	24.00	1.202	62.9	1.006	0.01	0.079	0.095
	LTE Band 41	20M	QPSK	50	0	Right Cheek	Full	41140	2645	22.00	23.00	1.259	62.9	1.006	0.09	0.064	0.082
	LTE Band 41	20M	QPSK	1	0	Right Tilted	Full	41140	2645	23.20	24.00	1.202	62.9	1.006	0.05	0.082	0.099
	LTE Band 41	20M	QPSK	50	0	Right Tilted	Full	41140	2645	22.00	23.00	1.259	62.9	1.006	0.05	0.064	0.080
07	LTE Band 41	20M	QPSK	1	0	Left Cheek	Full	41140	2645	23.20	24.00	1.202	62.9	1.006	-0.07	0.098	0.118
	LTE Band 41	20M	QPSK	50	0	Left Cheek	Full	41140	2645	22.00	23.00	1.259	62.9	1.006	0.03	0.076	0.096
	LTE Band 41	20M	QPSK	1	0	Left Tilted	Full	41140	2645	23.20	24.00	1.202	62.9	1.006	0.05	0.035	0.042
	LTE Band 41	20M	QPSK	50	0	Left Tilted	Full	41140	2645	22.00	23.00	1.259	62.9	1.006	0.1	0.027	0.034



<WLAN 2.4GHz SAR>

Plot No.	Band	Mode	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Max Area Scan SAR	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	Receiver On	1	2412	16.86	17.50	1.159	100	1.000		0.367		
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	Receiver On	1	2412	16.86	17.50	1.159	100	1.000		0.568		
08	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	Receiver On	1	2412	16.86	17.50	1.159	100	1.000	0.03	0.837	0.471	0.546
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	Receiver On	1	2412	16.86	17.50	1.159	100	1.000	0.01	0.602	0.331	0.384

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Right Cheek	Full	39	2441	9.89	10.00	1.026	76.91	1.083	-0.05	0.028	0.031
	Bluetooth	1Mbps	Right Tilted	Full	39	2441	9.89	10.00	1.026	76.91	1.083	0.16	0.032	0.036
09	Bluetooth	1Mbps	Left Cheek	Full	39	2441	9.89	10.00	1.026	76.91	1.083	0.05	0.062	0.069
	Bluetooth	1Mbps	Left Tilted	Full	39	2441	9.89	10.00	1.026	76.91	1.083	0.01	0.046	0.051

<WLAN 5GHz SAR>

Plot No.	Band	Mode	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Max Area Scan SAR	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5.3GHz	802.11a 6Mbps	Right Cheek	Full	64	5320	18.58	19.00	1.100	95.17	1.051		0.436		
	WLAN5.3GHz	802.11a 6Mbps	Right Tilted	Full	64	5320	18.58	19.00	1.100	95.17	1.051		0.233		
10	WLAN5.3GHz	802.11a 6Mbps	Left Cheek	Full	64	5320	18.58	19.00	1.100	95.17	1.051	0.09	1.370	0.575	0.665
	WLAN5.3GHz	802.11a 6Mbps	Left Tilted	Full	64	5320	18.58	19.00	1.100	95.17	1.051	-0.03	0.590	0.360	0.416
	WLAN5.5GHz	802.11a 6Mbps	Right Cheek	Full	132	5660	19.17	19.50	1.078	95.17	1.051		0.675		
	WLAN5.5GHz	802.11a 6Mbps	Right Tilted	Full	132	5660	19.17	19.50	1.078	95.17	1.051		0.622		
11	WLAN5.5GHz	802.11a 6Mbps	Left Cheek	Full	132	5660	19.17	19.50	1.078	95.17	1.051	-0.03	1.370	0.583	0.660
	WLAN5.5GHz	802.11a 6Mbps	Left Tilted	Full	132	5660	19.17	19.50	1.078	95.17	1.051	-0.05	1.267	0.322	0.365
	WLAN 5.8GHz	802.11a 6Mbps	Right Cheek	Full	165	5825	18.30	19.00	1.174	95.17	1.051		0.256		
	WLAN 5.8GHz	802.11a 6Mbps	Right Tilted	Full	165	5825	18.30	19.00	1.174	95.17	1.051		0.170		
12	WLAN 5.8GHz	802.11a 6Mbps	Left Cheek	Full	165	5825	18.30	19.00	1.174	95.17	1.051	-0.04	0.452	0.182	0.224
	WLAN 5.8GHz	802.11a 6Mbps	Left Tilted	Full	165	5825	18.30	19.00	1.174	95.17	1.051		0.275		



15.2 Hotspot SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS 3 Tx slots	Front	5	Hotspot On	251	848.8	27.92	28.00	1.019	-0.01	1.060	1.080
	GSM850	GPRS 3 Tx slots	Front	5	Hotspot On	128	824.2	27.86	28.00	1.033	-0.04	0.768	0.793
	GSM850	GPRS 3 Tx slots	Front	5	Hotspot On	189	836.4	27.90	28.00	1.023	-0.01	0.979	1.002
13	GSM850	GPRS 3 Tx slots	Back	5	Hotspot On	251	848.8	27.92	28.00	1.019	-0.02	1.190	1.212
	GSM850	GPRS 3 Tx slots	Back	5	Hotspot On	128	824.2	27.86	28.00	1.033	-0.02	0.892	0.921
	GSM850	GPRS 3 Tx slots	Back	5	Hotspot On	189	836.4	27.90	28.00	1.023	-0.06	1.090	1.115
	GSM850	GPRS 3 Tx slots	Left Side	5	Hotspot On	251	848.8	27.92	28.00	1.019	-0.03	0.152	0.155
	GSM850	GPRS 3 Tx slots	Right Side	5	Hotspot On	251	848.8	27.92	28.00	1.019	-0.02	0.485	0.494
	GSM850	GPRS 3 Tx slots	Bottom Side	5	Hotspot On	251	848.8	27.92	28.00	1.019	-0.09	0.893	0.910
	GSM850	GPRS 3 Tx slots	Bottom Side	5	Hotspot On	128	824.2	27.86	28.00	1.033	-0.03	0.683	0.705
	GSM850	GPRS 3 Tx slots	Bottom Side	5	Hotspot On	189	836.4	27.90	28.00	1.023	-0.06	0.900	0.921
	GSM1900	GPRS 3 Tx slots	Front	5	Full	810	1909.8	26.14	27.00	1.219	0.05	0.702	0.856
	GSM1900	GPRS 3 Tx slots	Front	5	Full	512	1850.2	25.71	27.00	1.346	-0.1	0.733	0.987
	GSM1900	GPRS 3 Tx slots	Front	5	Full	661	1880	26.06	27.00	1.242	0.06	0.721	0.895
	GSM1900	GPRS 3 Tx slots	Back	5	Full	810	1909.8	26.14	27.00	1.219	-0.05	0.810	0.987
14	GSM1900	GPRS 3 Tx slots	Back	5	Full	512	1850.2	25.71	27.00	1.346	0.03	0.950	1.279
	GSM1900	GPRS 3 Tx slots	Back	5	Full	661	1880	26.06	27.00	1.242	0.17	0.982	1.219
	GSM1900	GPRS 3 Tx slots	Left Side	5	Hotspot On	512	1850.2	25.12	25.50	1.091	0.02	0.038	0.042
	GSM1900	GPRS 3 Tx slots	Right Side	5	Hotspot On	512	1850.2	25.12	25.50	1.091	-0.05	0.486	0.530
	GSM1900	GPRS 3 Tx slots	Bottom Side	5	Hotspot On	512	1850.2	25.12	25.50	1.091	0.06	0.946	1.033
	GSM1900	GPRS 3 Tx slots	Bottom Side	5	Hotspot On	810	1909.8	25.02	25.50	1.117	0.02	0.807	0.901
	GSM1900	GPRS 3 Tx slots	Bottom Side	5	Hotspot On	661	1880	25.10	25.50	1.096	0.01	0.880	0.965

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band V	RMC 12.2Kbps	Front	5	Hotspot On	4233	846.6	21.98	22.50	1.127	0.01	0.867	0.977
	WCDMA Band V	RMC 12.2Kbps	Front	5	Hotspot On	4132	826.4	21.95	22.50	1.135	-0.04	0.701	0.796
	WCDMA Band V	RMC 12.2Kbps	Front	5	Hotspot On	4182	836.4	21.90	22.50	1.148	-0.17	0.824	0.946
15	WCDMA Band V	RMC 12.2Kbps	Back	5	Hotspot On	4233	846.6	21.98	22.50	1.127	0.07	1.020	1.150
	WCDMA Band V	RMC 12.2Kbps	Back	5	Hotspot On	4132	826.4	21.95	22.50	1.135	-0.02	0.815	0.925
	WCDMA Band V	RMC 12.2Kbps	Back	5	Hotspot On	4182	836.4	21.90	22.50	1.148	-0.03	0.972	1.116
	WCDMA Band V	RMC 12.2Kbps	Left Side	5	Hotspot On	4233	846.6	21.98	22.50	1.127	0.02	0.116	0.131
	WCDMA Band V	RMC 12.2Kbps	Right Side	5	Hotspot On	4233	846.6	21.98	22.50	1.127	-0.03	0.331	0.373
	WCDMA Band V	RMC 12.2Kbps	Bottom Side	5	Hotspot On	4233	846.6	21.98	22.50	1.127	-0.04	0.593	0.668
	WCDMA Band II	RMC 12.2Kbps	Front	5	Hotspot On	9538	1907.6	21.15	21.50	1.084	0.13	0.642	0.696
	WCDMA Band II	RMC 12.2Kbps	Back	5	Hotspot On	9538	1907.6	21.15	21.50	1.084	-0.09	0.809	0.877
16	WCDMA Band II	RMC 12.2Kbps	Back	5	Hotspot On	9262	1852.4	21.06	21.50	1.107	0.03	0.923	1.021
	WCDMA Band II	RMC 12.2Kbps	Back	5	Hotspot On	9400	1880	21.11	21.50	1.094	0.05	0.854	0.934
	WCDMA Band II	RMC 12.2Kbps	Left Side	5	Hotspot On	9538	1907.6	18.51	19.00	1.119	0.07	0.025	0.028
	WCDMA Band II	RMC 12.2Kbps	Right Side	5	Hotspot On	9538	1907.6	18.51	19.00	1.119	0.08	0.383	0.429
	WCDMA Band II	RMC 12.2Kbps	Bottom Side	5	Hotspot On	9538	1907.6	18.51	19.00	1.119	0.03	0.708	0.793



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 5	10M	QPSK	1	49	Front	5	Hotspot On	20525	836.5	21.62	22.50	1.225	-0.03	0.826	1.012
	LTE Band 5	10M	QPSK	25	0	Front	5	Hotspot On	20525	836.5	21.66	22.50	1.213	-0.08	0.574	0.696
	LTE Band 5	10M	QPSK	50	0	Front	5	Hotspot On	20525	836.5	21.63	22.50	1.222	-0.15	0.579	0.707
17	LTE Band 5	10M	QPSK	1	49	Back	5	Hotspot On	20525	836.5	21.62	22.50	1.225	0.02	0.862	1.056
	LTE Band 5	10M	QPSK	25	0	Back	5	Hotspot On	20525	836.5	21.66	22.50	1.213	-0.08	0.706	0.857
	LTE Band 5	10M	QPSK	50	0	Back	5	Hotspot On	20525	836.5	21.63	22.50	1.222	-0.05	0.689	0.842
	LTE Band 5	10M	QPSK	1	49	Left Side	5	Hotspot On	20525	836.5	21.62	22.50	1.225	0.01	0.096	0.118
	LTE Band 5	10M	QPSK	25	0	Left Side	5	Hotspot On	20525	836.5	21.66	22.50	1.213	0.01	0.075	0.091
	LTE Band 5	10M	QPSK	1	49	Right Side	5	Hotspot On	20525	836.5	21.62	22.50	1.225	-0.08	0.335	0.410
	LTE Band 5	10M	QPSK	25	0	Right Side	5	Hotspot On	20525	836.5	21.66	22.50	1.213	-0.01	0.266	0.323
	LTE Band 5	10M	QPSK	1	49	Bottom Side	5	Hotspot On	20525	836.5	21.62	22.50	1.225	-0.05	0.633	0.775
	LTE Band 5	10M	QPSK	25	0	Bottom Side	5	Hotspot On	20525	836.5	21.66	22.50	1.213	-0.01	0.511	0.620
	LTE Band 7	20M	QPSK	1	0	Front	5	Hotspot On	21100	2535	22.10	22.50	1.096	-0.08	0.942	1.033
	LTE Band 7	20M	QPSK	1	0	Front	5	Hotspot On	20850	2510	21.99	22.50	1.125	0.05	0.879	0.989
	LTE Band 7	20M	QPSK	1	0	Front	5	Hotspot On	21350	2560	22.01	22.50	1.119	-0.04	1.130	1.265
	LTE Band 7	20M	QPSK	50	50	Front	5	Hotspot On	21100	2535	22.05	22.50	1.109	-0.08	0.807	0.895
	LTE Band 7	20M	QPSK	50	50	Front	5	Hotspot On	20850	2510	21.96	22.50	1.132	0.01	0.692	0.784
	LTE Band 7	20M	QPSK	50	50	Front	5	Hotspot On	21350	2560	22.02	22.50	1.117	-0.05	0.926	1.034
	LTE Band 7	20M	QPSK	100	0	Front	5	Hotspot On	21100	2535	22.03	22.50	1.114	0.05	0.851	0.948
	LTE Band 7	20M	QPSK	1	0	Back	5	Hotspot On	21100	2535	22.10	22.50	1.096	0.01	0.859	0.942
	LTE Band 7	20M	QPSK	1	0	Back	5	Hotspot On	20850	2510	21.99	22.50	1.125	0.05	0.773	0.869
18	LTE Band 7	20M	QPSK	1	0	Back	5	Hotspot On	21350	2560	22.01	22.50	1.119	0.08	1.210	1.355
	LTE Band 7	20M	QPSK	50	50	Back	5	Hotspot On	21100	2535	22.05	22.50	1.109	0.15	0.831	0.922
	LTE Band 7	20M	QPSK	50	50	Back	5	Hotspot On	20850	2510	21.96	22.50	1.132	0.16	0.806	0.913
	LTE Band 7	20M	QPSK	50	50	Back	5	Hotspot On	21350	2560	22.02	22.50	1.117	-0.06	1.030	1.150
	LTE Band 7	20M	QPSK	100	0	Back	5	Hotspot On	21100	2535	22.03	22.50	1.114	-0.09	0.906	1.010
	LTE Band 7	20M	QPSK	1	0	Left Side	5	Hotspot On	21100	2535	17.57	18.00	1.104	0.01	0.353	0.390
	LTE Band 7	20M	QPSK	50	50	Left Side	5	Hotspot On	21100	2535	17.42	18.00	1.143	-0.01	0.242	0.277
	LTE Band 7	20M	QPSK	1	0	Bottom Side	5	Hotspot On	21100	2535	17.57	18.00	1.104	0.02	0.891	0.984
	LTE Band 7	20M	QPSK	1	0	Bottom Side	5	Hotspot On	20850	2510	17.31	18.00	1.172	0.06	0.734	0.860
	LTE Band 7	20M	QPSK	1	0	Bottom Side	5	Hotspot On	21350	2560	17.53	18.00	1.114	0.03	0.899	1.002
	LTE Band 7	20M	QPSK	50	50	Bottom Side	5	Hotspot On	21100	2535	17.42	18.00	1.143	0.01	0.885	1.011
	LTE Band 7	20M	QPSK	50	50	Bottom Side	5	Hotspot On	20850	2510	17.18	18.00	1.208	0.02	0.797	0.963
	LTE Band 7	20M	QPSK	50	50	Bottom Side	5	Hotspot On	21350	2560	17.40	18.00	1.148	0.04	0.956	1.098
	LTE Band 7	20M	QPSK	100	0	Bottom Side	5	Hotspot On	21100	2535	17.40	18.00	1.148	0.01	0.907	1.041



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	0	Front	5	Full	41140	2645	23.20	24.00	1.202	62.9	1.006	-0.05	0.796	0.963
	LTE Band 41	20M	QPSK	1	0	Front	5	Full	40140	2545	22.64	24.00	1.368	62.9	1.006	-0.02	0.411	0.566
	LTE Band 41	20M	QPSK	1	0	Front	5	Full	40400	2571	22.70	24.00	1.349	62.9	1.006	0.05	0.619	0.840
	LTE Band 41	20M	QPSK	1	0	Front	5	Full	40670	2598	22.81	24.00	1.315	62.9	1.006	0.01	0.849	1.123
	LTE Band 41	20M	QPSK	50	0	Front	5	Full	41140	2645	22.00	23.00	1.259	62.9	1.006	0.15	0.606	0.767
	LTE Band 41	20M	QPSK	50	0	Front	5	Full	40140	2545	21.59	23.00	1.384	62.9	1.006	-0.02	0.406	0.565
	LTE Band 41	20M	QPSK	50	0	Front	5	Full	40400	2571	21.72	23.00	1.343	62.9	1.006	0.1	0.614	0.829
	LTE Band 41	20M	QPSK	50	0	Front	5	Full	40670	2598	21.78	23.00	1.324	62.9	1.006	-0.04	0.668	0.890
	LTE Band 41	20M	QPSK	100	0	Front	5	Full	41140	2645	21.92	23.00	1.282	62.9	1.006	0.02	0.667	0.860
19	LTE Band 41	20M	QPSK	1	0	Back	5	Full	41140	2645	23.20	24.00	1.202	62.9	1.006	-0.05	1.190	1.439
	LTE Band 41	20M	QPSK	1	0	Back	5	Full	40140	2545	22.64	24.00	1.368	62.9	1.006	-0.09	0.442	0.608
	LTE Band 41	20M	QPSK	1	0	Back	5	Full	40400	2571	22.70	24.00	1.349	62.9	1.006	-0.01	0.998	1.354
	LTE Band 41	20M	QPSK	1	0	Back	5	Full	40670	2598	22.81	24.00	1.315	62.9	1.006	-0.03	0.891	1.179
	LTE Band 41	20M	QPSK	50	0	Back	5	Full	41140	2645	22.00	23.00	1.259	62.9	1.006	0.07	0.812	1.028
	LTE Band 41	20M	QPSK	50	0	Back	5	Full	40140	2545	21.59	23.00	1.384	62.9	1.006	-0.06	0.393	0.547
	LTE Band 41	20M	QPSK	50	0	Back	5	Full	40400	2571	21.72	23.00	1.343	62.9	1.006	0.14	0.646	0.873
	LTE Band 41	20M	QPSK	50	0	Back	5	Full	40670	2598	21.78	23.00	1.324	62.9	1.006	0.06	0.793	1.057
	LTE Band 41	20M	QPSK	100	0	Back	5	Full	41140	2645	21.92	23.00	1.282	62.9	1.006	-0.11	0.827	1.067
	LTE Band 41	20M	QPSK	1	0	Left Side	5	Hotspot On	41140	2645	20.13	21.00	1.222	62.9	1.006	0.01	0.237	0.291
	LTE Band 41	20M	QPSK	50	0	Left Side	5	Hotspot On	41140	2645	20.07	21.00	1.239	62.9	1.006	0.02	0.109	0.136
	LTE Band 41	20M	QPSK	1	0	Bottom Side	5	Hotspot On	41140	2645	20.13	21.00	1.222	62.9	1.006	0.13	0.890	1.094
	LTE Band 41	20M	QPSK	1	0	Bottom Side	5	Hotspot On	40140	2545	19.81	21.00	1.315	62.9	1.006	0.01	0.691	0.914
	LTE Band 41	20M	QPSK	1	0	Bottom Side	5	Hotspot On	40400	2571	20.04	21.00	1.247	62.9	1.006	-0.03	1.070	1.343
	LTE Band 41	20M	QPSK	1	0	Bottom Side	5	Hotspot On	40670	2598	20.05	21.00	1.245	62.9	1.006	0.06	1.130	1.415
	LTE Band 41	20M	QPSK	50	0	Bottom Side	5	Hotspot On	41140	2645	20.07	21.00	1.239	62.9	1.006	0.09	1.050	1.309
	LTE Band 41	20M	QPSK	50	0	Bottom Side	5	Hotspot On	40140	2545	19.76	21.00	1.330	62.9	1.006	0.06	0.692	0.926
	LTE Band 41	20M	QPSK	50	0	Bottom Side	5	Hotspot On	40400	2571	20.00	21.00	1.259	62.9	1.006	0.05	1.080	1.368
	LTE Band 41	20M	QPSK	50	0	Bottom Side	5	Hotspot On	40670	2598	19.96	21.00	1.271	62.9	1.006	-0.04	1.100	1.406
	LTE Band 41	20M	QPSK	100	0	Bottom Side	5	Hotspot On	41140	2645	20.03	21.00	1.250	62.9	1.006	0.07	0.801	1.007

<WLAN 2.4GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Max Area Scan SAR	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	5	Full	1	2412	17.99	18.50	1.125	100	1.000	0.01	0.527	0.290	0.326
20	WLAN2.4GHz	802.11b 1Mbps	Back	5	Full	1	2412	17.99	18.50	1.125	100	1.000	0.17	0.771	0.444	0.499
	WLAN2.4GHz	802.11b 1Mbps	Right Side	5	Full	1	2412	17.99	18.50	1.125	100	1.000		0.507		
	WLAN2.4GHz	802.11b 1Mbps	Top Side	5	Full	1	2412	17.99	18.50	1.125	100	1.000		0.522		



<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	5	Full	39	2441	9.89	10.00	1.026	76.91	1.083	0.09	0.022	0.025
21	Bluetooth	1Mbps	Back	5	Full	39	2441	9.89	10.00	1.026	76.91	1.083	0.03	0.037	0.041
	Bluetooth	1Mbps	Right Side	5	Full	39	2441	9.89	10.00	1.026	76.91	1.083	0.01	0.025	0.028
	Bluetooth	1Mbps	Top Side	5	Full	39	2441	9.89	10.00	1.026	76.91	1.083	0.02	0.026	0.029

<WLAN 5GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Max Area Scan SAR	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5.2GHz	802.11a 6Mbps	Front	5	Full	36	5180	18.26	19.00	1.186	95.17	1.051	-0.01	0.259	0.108	0.135
22	WLAN5.2GHz	802.11a 6Mbps	Back	5	Full	36	5180	18.26	19.00	1.186	95.17	1.051	0.01	0.78	0.348	0.434
	WLAN5.2GHz	802.11a 6Mbps	Right Side	5	Full	36	5180	18.26	19.00	1.186	95.17	1.051		0.195		
	WLAN5.2GHz	802.11a 6Mbps	Top Side	5	Full	36	5180	18.26	19.00	1.186	95.17	1.051		0.124		
	WLAN 5.8GHz	802.11a 6Mbps	Front	5	Full	165	5825	18.30	19.00	1.175	95.17	1.051	-0.01	0.120	0.040	0.049
23	WLAN 5.8GHz	802.11a 6Mbps	Back	5	Full	165	5825	18.30	19.00	1.175	95.17	1.051	0.01	0.959	0.408	0.504
	WLAN 5.8GHz	802.11a 6Mbps	Right Side	5	Full	165	5825	18.30	19.00	1.175	95.17	1.051	-0.11	0.340	0.132	0.163
	WLAN 5.8GHz	802.11a 6Mbps	Top Side	5	Full	165	5825	18.30	19.00	1.175	95.17	1.051		0.135		

15.3 Body Worn Accessory SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS 3 Tx slots	Front	5	-	P-Sensor On	251	848.8	27.92	28.00	1.019	-0.01	1.060	1.080
	GSM850	GPRS 3 Tx slots	Front	5	-	P-Sensor On	128	824.2	27.86	28.00	1.033	-0.04	0.768	0.793
	GSM850	GPRS 3 Tx slots	Front	5	-	P-Sensor On	189	836.4	27.90	28.00	1.023	-0.01	0.979	1.002
24	GSM850	GPRS 3 Tx slots	Back	5	-	P-Sensor On	251	848.8	27.92	28.00	1.019	-0.02	1.190	1.212
	GSM850	GPRS 3 Tx slots	Back	5	-	P-Sensor On	128	824.2	27.86	28.00	1.033	-0.02	0.892	0.921
	GSM850	GPRS 3 Tx slots	Back	5	-	P-Sensor On	189	836.4	27.90	28.00	1.023	-0.06	1.090	1.115
	GSM850	GPRS 3 Tx slots	Back	5	Headset	P-Sensor On	251	848.8	27.92	28.00	1.019	-0.05	1.110	1.131
	GSM850	GPRS 3 Tx slots	Back	5	Headset	P-Sensor On	128	824.2	27.86	28.00	1.033	0.09	0.868	0.896
	GSM850	GPRS 3 Tx slots	Back	5	Headset	P-Sensor On	189	836.4	27.90	28.00	1.023	-0.02	0.906	0.927
	GSM1900	GPRS 3 Tx slots	Front	5	-	Full	810	1909.8	26.14	27.00	1.219	0.05	0.702	0.856
	GSM1900	GPRS 3 Tx slots	Front	5	-	Full	512	1850.2	25.71	27.00	1.346	-0.1	0.733	0.987
	GSM1900	GPRS 3 Tx slots	Front	5	-	Full	661	1880	26.06	27.00	1.242	0.06	0.721	0.895
	GSM1900	GPRS 3 Tx slots	Back	5	-	Full	810	1909.8	26.14	27.00	1.219	-0.05	0.810	0.987
25	GSM1900	GPRS 3 Tx slots	Back	5	-	Full	512	1850.2	25.71	27.00	1.346	0.03	0.950	1.279
	GSM1900	GPRS 3 Tx slots	Back	5	-	Full	661	1880	26.06	27.00	1.242	0.17	0.982	1.219
	GSM1900	GPRS 3 Tx slots	Back	5	Headset	Full	512	1850.2	25.71	27.00	1.346	-0.02	0.856	1.152
	GSM1900	GPRS 3 Tx slots	Back	5	Headset	Full	810	1909.8	26.14	27.00	1.219	-0.06	0.885	1.079
	GSM1900	GPRS 3 Tx slots	Back	5	Headset	Full	661	1880	26.06	27.00	1.242	-0.07	0.879	1.091

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band V	RMC 12.2Kbps	Front	5	-	P-Sensor On	4233	846.6	21.98	22.50	1.127	0.01	0.867	0.977
	WCDMA Band V	RMC 12.2Kbps	Front	5	-	P-Sensor On	4132	826.4	21.95	22.50	1.135	-0.04	0.701	0.796
	WCDMA Band V	RMC 12.2Kbps	Front	5	-	P-Sensor On	4182	836.4	21.90	22.50	1.148	-0.17	0.824	0.946
26	WCDMA Band V	RMC 12.2Kbps	Back	5	-	P-Sensor On	4233	846.6	21.98	22.50	1.127	0.07	1.020	1.150
	WCDMA Band V	RMC 12.2Kbps	Back	5	-	P-Sensor On	4132	826.4	21.95	22.50	1.135	-0.02	0.815	0.925
	WCDMA Band V	RMC 12.2Kbps	Back	5	-	P-Sensor On	4182	836.4	21.90	22.50	1.148	-0.03	0.972	1.116
	WCDMA Band II	RMC 12.2Kbps	Front	5	-	P-Sensor On	9538	1907.6	21.15	21.50	1.084	0.13	0.642	0.696
	WCDMA Band II	RMC 12.2Kbps	Back	5	-	P-Sensor On	9538	1907.6	21.15	21.50	1.084	-0.09	0.809	0.877
27	WCDMA Band II	RMC 12.2Kbps	Back	5	-	P-Sensor On	9262	1852.4	21.06	21.50	1.107	0.03	0.923	1.021
	WCDMA Band II	RMC 12.2Kbps	Back	5	-	P-Sensor On	9400	1880	21.11	21.50	1.094	0.05	0.854	0.934



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Headset	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 5	10M	QPSK	1	49	Front	5	-	P-Sensor On	20525	836.5	21.62	22.50	1.225	-0.03	0.826	1.012
	LTE Band 5	10M	QPSK	25	0	Front	5	-	P-Sensor On	20525	836.5	21.66	22.50	1.213	-0.08	0.574	0.696
	LTE Band 5	10M	QPSK	50	0	Front	5	-	P-Sensor On	20525	836.5	21.63	22.50	1.222	-0.15	0.579	0.707
28	LTE Band 5	10M	QPSK	1	49	Back	5	-	P-Sensor On	20525	836.5	21.62	22.50	1.225	0.02	0.862	1.056
	LTE Band 5	10M	QPSK	25	0	Back	5	-	P-Sensor On	20525	836.5	21.66	22.50	1.213	-0.08	0.706	0.857
	LTE Band 5	10M	QPSK	50	0	Back	5	-	P-Sensor On	20525	836.5	21.63	22.50	1.222	-0.05	0.689	0.842
	LTE Band 7	20M	QPSK	1	0	Front	5	-	P-Sensor On	21100	2535	22.10	22.50	1.096	-0.08	0.942	1.033
	LTE Band 7	20M	QPSK	1	0	Front	5	-	P-Sensor On	20850	2510	21.99	22.50	1.125	0.05	0.879	0.989
	LTE Band 7	20M	QPSK	1	0	Front	5	-	P-Sensor On	21350	2560	22.01	22.50	1.119	-0.04	1.130	1.265
	LTE Band 7	20M	QPSK	50	50	Front	5	-	P-Sensor On	21100	2535	22.05	22.50	1.109	-0.08	0.807	0.895
	LTE Band 7	20M	QPSK	50	50	Front	5	-	P-Sensor On	20850	2510	21.96	22.50	1.132	0.01	0.692	0.784
	LTE Band 7	20M	QPSK	50	50	Front	5	-	P-Sensor On	21350	2560	22.02	22.50	1.117	-0.05	0.926	1.034
	LTE Band 7	20M	QPSK	100	0	Front	5	-	P-Sensor On	21100	2535	22.03	22.50	1.114	0.05	0.851	0.948
	LTE Band 7	20M	QPSK	1	0	Back	5	-	P-Sensor On	21100	2535	22.10	22.50	1.096	0.01	0.859	0.942
	LTE Band 7	20M	QPSK	1	0	Back	5	-	P-Sensor On	20850	2510	21.99	22.50	1.125	0.05	0.773	0.869
	LTE Band 7	20M	QPSK	1	0	Back	5	-	P-Sensor On	21350	2560	22.01	22.50	1.119	0.08	1.210	1.355
	LTE Band 7	20M	QPSK	50	50	Back	5	-	P-Sensor On	21100	2535	22.05	22.50	1.109	0.15	0.831	0.922
	LTE Band 7	20M	QPSK	50	50	Back	5	-	P-Sensor On	20850	2510	21.96	22.50	1.132	0.16	0.806	0.913
	LTE Band 7	20M	QPSK	50	50	Back	5	-	P-Sensor On	21350	2560	22.02	22.50	1.117	-0.06	1.030	1.150
	LTE Band 7	20M	QPSK	100	0	Back	5	-	P-Sensor On	21100	2535	22.03	22.50	1.114	-0.09	0.906	1.010
	LTE Band 7	20M	QPSK	1	0	Front	5	Headset	P-Sensor On	21350	2560	22.01	22.50	1.119	-0.13	1.100	1.231
	LTE Band 7	20M	QPSK	1	0	Front	5	Headset	P-Sensor On	21100	2535	22.10	22.50	1.096	-0.16	0.989	1.084
	LTE Band 7	20M	QPSK	1	0	Front	5	Headset	P-Sensor On	20850	2510	21.99	22.50	1.125	0.05	0.864	0.972
29	LTE Band 7	20M	QPSK	1	0	Back	5	Headset	P-Sensor On	21350	2560	22.01	22.50	1.119	-0.03	1.250	1.399
	LTE Band 7	20M	QPSK	1	0	Back	5	Headset	P-Sensor On	21100	2535	22.10	22.50	1.096	-0.08	1.180	1.294
	LTE Band 7	20M	QPSK	1	0	Back	5	Headset	P-Sensor On	20850	2510	21.99	22.50	1.125	0.05	1.000	1.125



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Headset	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	0	Front	5	-	Full	41140	2645	23.20	24.00	1.202	62.9	1.006	-0.05	0.796	0.963
	LTE Band 41	20M	QPSK	1	0	Front	5	-	Full	40140	2545	22.64	24.00	1.368	62.9	1.006	-0.02	0.411	0.566
	LTE Band 41	20M	QPSK	1	0	Front	5	-	Full	40400	2571	22.70	24.00	1.349	62.9	1.006	0.05	0.619	0.840
	LTE Band 41	20M	QPSK	1	0	Front	5	-	Full	40670	2598	22.81	24.00	1.315	62.9	1.006	0.01	0.849	1.123
	LTE Band 41	20M	QPSK	50	0	Front	5	-	Full	41140	2645	22.00	23.00	1.259	62.9	1.006	0.15	0.606	0.767
	LTE Band 41	20M	QPSK	50	0	Front	5	-	Full	40140	2545	21.59	23.00	1.384	62.9	1.006	-0.02	0.406	0.565
	LTE Band 41	20M	QPSK	50	0	Front	5	-	Full	40400	2571	21.72	23.00	1.343	62.9	1.006	0.1	0.614	0.829
	LTE Band 41	20M	QPSK	50	0	Front	5	-	Full	40670	2598	21.78	23.00	1.324	62.9	1.006	-0.04	0.668	0.890
	LTE Band 41	20M	QPSK	100	0	Front	5	-	Full	41140	2645	21.92	23.00	1.282	62.9	1.006	0.02	0.667	0.860
30	LTE Band 41	20M	QPSK	1	0	Back	5	-	Full	41140	2645	23.20	24.00	1.202	62.9	1.006	-0.05	1.190	1.439
	LTE Band 41	20M	QPSK	1	0	Back	5	-	Full	40140	2545	22.64	24.00	1.368	62.9	1.006	-0.09	0.442	0.608
	LTE Band 41	20M	QPSK	1	0	Back	5	-	Full	40400	2571	22.70	24.00	1.349	62.9	1.006	-0.01	0.998	1.354
	LTE Band 41	20M	QPSK	1	0	Back	5	-	Full	40670	2598	22.81	24.00	1.315	62.9	1.006	-0.03	0.891	1.179
	LTE Band 41	20M	QPSK	50	0	Back	5	-	Full	41140	2645	22.00	23.00	1.259	62.9	1.006	0.07	0.812	1.028
	LTE Band 41	20M	QPSK	50	0	Back	5	-	Full	40140	2545	21.59	23.00	1.384	62.9	1.006	-0.06	0.393	0.547
	LTE Band 41	20M	QPSK	50	0	Back	5	-	Full	40400	2571	21.72	23.00	1.343	62.9	1.006	0.14	0.646	0.873
	LTE Band 41	20M	QPSK	50	0	Back	5	-	Full	40670	2598	21.78	23.00	1.324	62.9	1.006	0.06	0.793	1.057
	LTE Band 41	20M	QPSK	100	0	Back	5	-	Full	41140	2645	21.92	23.00	1.282	62.9	1.006	-0.11	0.827	1.067
	LTE Band 41	20M	QPSK	1	0	Back	5	Headset	Full	41140	2645	23.20	24.00	1.202	62.9	1.006	0.07	1.060	1.282
	LTE Band 41	20M	QPSK	1	0	Back	5	Headset	Full	40140	2545	22.64	24.00	1.368	62.9	1.006	0.04	0.428	0.589
	LTE Band 41	20M	QPSK	1	0	Back	5	Headset	Full	40400	2571	22.70	24.00	1.349	62.9	1.006	0.04	0.772	1.048
	LTE Band 41	20M	QPSK	1	0	Back	5	Headset	Full	40670	2598	22.81	24.00	1.315	62.9	1.006	0.01	0.988	1.307



<WLAN 2.4GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Max Area Scan SAR	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	5	-	Full	1	2412	17.99	18.50	1.125	100	1.000	0.01	0.527	0.290	0.326
31	WLAN2.4GHz	802.11b 1Mbps	Back	5	-	Full	1	2412	17.99	18.50	1.125	100	1.000	0.17	0.771	0.444	0.499

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	5	-	Full	39	2441	9.89	10.00	1.026	76.91	1.083	0.09	0.022	0.025
32	Bluetooth	1Mbps	Back	5	-	Full	39	2441	9.89	10.00	1.026	76.91	1.083	0.03	0.037	0.041

<WLAN 5GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Max Area Scan SAR	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5.3GHz	802.11a 6Mbps	Front	5	-	Full	64	5320	18.58	19.00	1.102	95.17	1.051		0.339		
33	WLAN5.3GHz	802.11a 6Mbps	Back	5	-	Full	64	5320	18.58	19.00	1.102	95.17	1.051	-0.17	0.607	0.261	0.302
	WLAN5.5GHz	802.11a 6Mbps	Front	5	-	Full	132	5660	19.17	19.50	1.079	95.17	1.051	-0.02	0.326	0.163	0.185
34	WLAN5.5GHz	802.11a 6Mbps	Back	5	-	Full	132	5660	19.17	19.50	1.079	95.17	1.051	0.04	1.406	0.584	0.662
	WLAN 5.8GHz	802.11a 6Mbps	Front	5	-	Full	165	5825	18.30	19.00	1.175	95.17	1.051	0.01	0.120	0.040	0.050
35	WLAN 5.8GHz	802.11a 6Mbps	Back	5	-	Full	165	5825	18.30	19.00	1.175	95.17	1.051	0.01	0.959	0.408	0.504



15.4 Product specific 10g SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
36	GSM850	GPRS 3 Tx slots	Front	0	Full	251	848.8	29.38	30.00	1.153	-0.03	1.530	1.765
	GSM850	GPRS 3 Tx slots	Back	0	Full	251	848.8	29.38	30.00	1.153	-0.18	1.190	1.373
	GSM850	GPRS 3 Tx slots	Bottom Side	0	Full	251	848.8	29.38	30.00	1.153	0.09	0.698	0.805
37	GSM1900	GPRS 3 Tx slots	Back	0	Full	810	1909.8	26.14	27.00	1.219	0.08	1.250	1.524
	GSM1900	GPRS 3 Tx slots	Bottom Side	0	Full	810	1909.8	26.14	27.00	1.219	0.01	1.620	1.975

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
38	WCDMA Band V	RMC 12.2Kbps	Front	0	Full	4132	826.4	23.37	24.00	1.156	-0.02	1.170	1.353
	WCDMA Band V	RMC 12.2Kbps	Back	0	Full	4132	826.4	23.37	24.00	1.156	0.09	1.400	1.619
39	WCDMA Band II	RMC 12.2Kbps	Front	0	Handheld On	9538	1907.6	22.51	23.00	1.119	0.02	1.280	1.433
	WCDMA Band II	RMC 12.2Kbps	Back	0	Handheld On	9538	1907.6	22.51	23.00	1.119	0.07	1.780	1.993
	WCDMA Band II	RMC 12.2Kbps	Bottom Side	0	Handheld On	9538	1907.6	22.51	23.00	1.119	0.06	0.647	0.724

<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
40	LTE Band 5	10M	QPSK	1	0	Front	0	Full	20525	836.5	22.97	24.00	1.268	-0.03	1.660	2.104
	LTE Band 5	10M	QPSK	25	0	Front	0	Full	20525	836.5	21.84	23.00	1.306	-0.07	1.360	1.776
	LTE Band 5	10M	QPSK	50	0	Front	0	Full	20525	836.5	21.81	23.00	1.315	0.07	0.912	1.199
	LTE Band 5	10M	QPSK	1	0	Back	0	Full	20525	836.5	22.97	24.00	1.268	0.11	1.410	1.787
	LTE Band 5	10M	QPSK	25	0	Back	0	Full	20525	836.5	21.84	23.00	1.306	-0.06	1.180	1.541
41	LTE Band 7	20M	QPSK	1	0	Front	0	Handheld On	21100	2535	21.47	22.00	1.130	0.01	1.530	1.729
	LTE Band 7	20M	QPSK	50	50	Front	0	Handheld On	21100	2535	21.45	22.00	1.135	-0.03	1.570	1.782
	LTE Band 7	20M	QPSK	1	0	Back	0	Handheld On	21100	2535	21.47	22.00	1.130	-0.02	2.130	2.406
	LTE Band 7	20M	QPSK	1	0	Back	0	Handheld On	20850	2510	21.42	22.00	1.143	0.01	1.900	2.171
	LTE Band 7	20M	QPSK	1	0	Back	0	Handheld On	21350	2560	21.39	22.00	1.151	0.09	2.180	2.509
	LTE Band 7	20M	QPSK	50	50	Back	0	Handheld On	21100	2535	21.45	22.00	1.135	0.09	2.130	2.418
	LTE Band 7	20M	QPSK	50	50	Back	0	Handheld On	20850	2510	21.31	22.00	1.172	0.01	2.110	2.473
	LTE Band 7	20M	QPSK	50	50	Back	0	Handheld On	21350	2560	21.39	22.00	1.151	0.02	2.180	2.509
	LTE Band 7	20M	QPSK	100	0	Back	0	Handheld On	21100	2535	21.42	22.00	1.143	0.01	2.120	2.423
	LTE Band 7	20M	QPSK	1	0	Bottom Side	0	Handheld On	21100	2535	21.47	22.00	1.130	0.04	2.230	2.519
41	LTE Band 7	20M	QPSK	1	0	Bottom Side	0	Handheld On	20850	2510	21.42	22.00	1.143	0.07	2.140	2.446
	LTE Band 7	20M	QPSK	1	0	Bottom Side	0	Handheld On	21350	2560	21.39	22.00	1.151	0.05	1.890	2.175
	LTE Band 7	20M	QPSK	50	50	Bottom Side	0	Handheld On	21100	2535	21.45	22.00	1.135	0.03	2.120	2.406
	LTE Band 7	20M	QPSK	50	50	Bottom Side	0	Handheld On	20850	2510	21.31	22.00	1.172	0.02	2.080	2.438
	LTE Band 7	20M	QPSK	50	50	Bottom Side	0	Handheld On	21350	2560	21.39	22.00	1.151	0.07	1.780	2.048
LTE Band 7	20M	QPSK	100	0	Bottom Side	0	Handheld On	21100	2535	21.42	22.00	1.143	0.08	1.860	2.126	



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
42	LTE Band 41	20M	QPSK	1	0	Back	0	Full	41140	2645	23.20	24.00	1.202	62.9	1.006	0.02	1.580	1.911
	LTE Band 41	20M	QPSK	50	0	Back	0	Full	41140	2645	22.00	23.00	1.259	62.9	1.006	0.09	1.100	1.393
	LTE Band 41	20M	QPSK	100	0	Back	0	Full	41140	2645	21.92	23.00	1.282	62.9	1.006	-0.01	1.050	1.355
	LTE Band 41	20M	QPSK	1	0	Bottom Side	0	Full	41140	2645	23.20	24.00	1.202	62.9	1.006	0.06	1.140	1.379
	LTE Band 41	20M	QPSK	50	0	Bottom Side	0	Full	41140	2645	22.00	23.00	1.259	62.9	1.006	-0.18	0.880	1.115

<WLAN 5GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Max Area Scan SAR	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN5.3GHz	802.11a 6Mbps	Front	0	Full	64	5320	18.58	19.00	1.102	95.17	1.051		1.286		
43	WLAN5.3GHz	802.11a 6Mbps	Back	0	Full	64	5320	18.58	19.00	1.102	95.17	1.051	0.04	3.218	0.455	0.527
	WLAN5.3GHz	802.11a 6Mbps	Right Side	0	Full	64	5320	18.58	19.00	1.102	95.17	1.051		0.842		
	WLAN5.3GHz	802.11a 6Mbps	Top Side	0	Full	64	5320	18.58	19.00	1.102	95.17	1.051		0.581		
	WLAN 5.5GHz	802.11a 6Mbps	Front	0	Full	132	5660	19.17	19.50	1.079	95.17	1.051		1.332		
44	WLAN 5.5GHz	802.11a 6Mbps	Back	0	Full	132	5660	19.17	19.50	1.079	95.17	1.051	0.02	4.525	0.594	0.674
	WLAN 5.5GHz	802.11a 6Mbps	Right Side	0	Full	132	5660	19.17	19.50	1.079	95.17	1.051		0.573		
	WLAN 5.5GHz	802.11a 6Mbps	Top Side	0	Full	132	5660	19.17	19.50	1.079	95.17	1.051		0.303		



15.5 Repeated SAR Measurement

<1g SAR>

No.	Band	Mode	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Headset	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	GSM850	GPRS 3 Tx slots	-	-	-	-	Back	-	5	P-Sensor On	251	848.8	27.92	28.00	1.019	-0.02	1.190	1	1.212
2nd	GSM850	GPRS 3 Tx slots	-	-	-	-	Back	-	5	P-Sensor On	251	848.8	27.92	28.00	1.019	0.03	1.170	1.017	1.192
1st	GSM1900	GPRS 3 Tx slots	-	-	-	-	Back	-	5	Full	661	1880	26.06	27.00	1.242	0.17	0.982	1	1.219
2nd	GSM1900	GPRS 3 Tx slots	-	-	-	-	Back	-	5	Full	661	1880	26.06	27.00	1.242	0.03	0.968	1.014	1.202
1st	LTE Band 7	-	20M	QPSK	1	0	Back	Headset	5	P-Sensor On	21350	2560	22.01	22.50	1.119	-0.03	1.250	1	1.399
2nd	LTE Band 7	-	20M	QPSK	1	0	Back	Headset	5	P-Sensor On	21350	2560	22.01	22.50	1.119	0.06	1.240	1.008	1.388

<10g SAR>

No.	Band	Mode	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Ratio	Reported 10g SAR (W/kg)
1st	LTE Band 7	-	20M	QPSK	1	0	Bottom Side	0	Handheld On	21100	2535	21.47	22.00	1.130	0.04	2.230	1	2.519
2nd	LTE Band 7	-	20M	QPSK	1	0	Bottom Side	0	Handheld On	21100	2535	21.47	22.00	1.130	-0.05	2.180	1.023	2.463

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
3. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. The ratio is the difference in percentage between original and repeated *measured SAR*.
5. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

16. Simultaneous Transmission Analysis

No.	Simultaneous Transmission Configurations	Portable Handset			
		Head	Body-worn	Hotspot	Product specific 10g SAR
1.	GSM Voice + WLAN2.4GHz	Yes	Yes		
2.	GPRS/EDGE + WLAN2.4GHz	Yes	Yes	Yes	Yes
3.	WCDMA + WLAN2.4GHz	Yes	Yes	Yes	Yes
4.	LTE + WLAN2.4GHz	Yes	Yes	Yes	Yes
5.	GSM Voice + WLAN5.3/5.5GHz	Yes	Yes		
6.	GPRS/EDGE + WLAN5.3/5.5GHz	Yes	Yes		Yes
7.	WCDMA + WLAN5.3/5.5GHz	Yes	Yes		Yes
8.	LTE + WLAN5.3/5.5GHz	Yes	Yes		Yes
9.	GSM Voice + WLAN5.2/5.8GHz	Yes	Yes		
10.	GPRS/EDGE + WLAN5.2/5.8GHz	Yes	Yes	Yes	Yes
11.	WCDMA + WLAN5.2/5.8GHz	Yes	Yes	Yes	Yes
12.	LTE + WLAN5.2/5.8GHz	Yes	Yes	Yes	Yes
13.	GSM Voice + Bluetooth	Yes	Yes		
14.	GPRS/EDGE + Bluetooth	Yes	Yes	Yes	Yes
15.	WCDMA + Bluetooth	Yes	Yes	Yes	Yes
16.	LTE + Bluetooth	Yes	Yes	Yes	Yes
17.	Bluetooth + WLAN5.3/5.5GHz	Yes	Yes		Yes
18.	Bluetooth + WLAN5.2/5.8GHz	Yes	Yes	Yes	Yes
19.	GSM Voice + Bluetooth + WLAN5.3/5.5GHz	Yes	Yes		
20.	GPRS/EDGE + Bluetooth + WLAN5.3/5.5GHz	Yes	Yes		Yes
21.	WCDMA + Bluetooth + WLAN5.3/5.5GHz	Yes	Yes		Yes
22.	LTE + Bluetooth + WLAN5.3/5.5GHz	Yes	Yes		Yes
23.	GSM Voice + Bluetooth + WLAN5.2/5.8GHz	Yes	Yes		
24.	GPRS/EDGE + Bluetooth + WLAN5.2/5.8GHz	Yes	Yes	Yes	Yes
25.	WCDMA + Bluetooth + WLAN5.2/5.8GHz	Yes	Yes	Yes	Yes
26.	LTE + Bluetooth + WLAN5.2/5.8GHz	Yes	Yes	Yes	Yes

General Note:

1. This device supports VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation.
2. EUT will choose each GSM, WCDMA and LTE according to the network signal condition; therefore, they will not operate simultaneously at any moment.
3. This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications.
4. This device 2.4GHz WLAN/ 5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WLAN Direct (GC/GO), and 5.3GHz / 5.5GHz supports WLAN Direct (GC only).
5. EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment though they have independent antenna.
6. WLAN 2.4GHz and Bluetooth share the same antenna so can't transmit simultaneously.
7. For simultaneously analysis, since the SAR summation of 3 transmitters can cover others combination of 2 transmitters, therefore in this section did not additional to evaluate 2TX combination of simultaneously transmission.
8. Chose the worst zoom scan SAR of WLAN correspondingly for co-located with WWAN analysis.
9. The reported SAR summation is calculated based on the same configuration and test position.
10. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) 1g Scalar SAR summation < 1.6W/kg and 10g Scalar SAR summation < 4.0W/kg.
 - ii) $SPLSR = (SAR_1 + SAR_2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$, where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$ for 1g SAR and $SPLSR \leq 0.10$ for 10g SAR, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band 1g SAR < 1.6W/kg and 10g SAR < 4.0W/kg.
 - v) The SPLSR calculated results please refer to section 16.5.



16.1 Head Exposure Conditions

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth		
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
GSM	GSM850	Right Cheek	0.407	0.546	0.665	0.031	0.95	1.10
		Right Tilted	0.149	0.546	0.665	0.036	0.70	0.85
		Left Cheek	0.309	0.546	0.665	0.069	0.86	1.04
		Left Tilted	0.165	0.384	0.416	0.051	0.55	0.63
	GSM1900	Right Cheek	0.045	0.546	0.665	0.031	0.59	0.74
		Right Tilted	0.040	0.546	0.665	0.036	0.59	0.74
		Left Cheek	0.077	0.546	0.665	0.069	0.62	0.81
		Left Tilted	0.027	0.384	0.416	0.051	0.41	0.49
WCDMA	Band V	Right Cheek	0.305	0.546	0.665	0.031	0.85	1.00
		Right Tilted	0.131	0.546	0.665	0.036	0.68	0.83
		Left Cheek	0.250	0.546	0.665	0.069	0.80	0.98
		Left Tilted	0.146	0.384	0.416	0.051	0.53	0.61
	Band II	Right Cheek	0.093	0.546	0.665	0.031	0.64	0.79
		Right Tilted	0.058	0.546	0.665	0.036	0.60	0.76
		Left Cheek	0.133	0.546	0.665	0.069	0.68	0.87
		Left Tilted	0.036	0.384	0.416	0.051	0.42	0.50
LTE	Band 5	Right Cheek	0.306	0.546	0.665	0.031	0.85	1.00
		Right Tilted	0.121	0.546	0.665	0.036	0.67	0.82
		Left Cheek	0.246	0.546	0.665	0.069	0.79	0.98
		Left Tilted	0.134	0.384	0.416	0.051	0.52	0.60
	Band 7	Right Cheek	0.171	0.546	0.665	0.031	0.72	0.87
		Right Tilted	0.152	0.546	0.665	0.036	0.70	0.85
		Left Cheek	0.176	0.546	0.665	0.069	0.72	0.91
		Left Tilted	0.040	0.384	0.416	0.051	0.42	0.51
	Band 41	Right Cheek	0.095	0.546	0.665	0.031	0.64	0.79
		Right Tilted	0.099	0.546	0.665	0.036	0.65	0.80
		Left Cheek	0.118	0.546	0.665	0.069	0.66	0.85
		Left Tilted	0.042	0.384	0.416	0.051	0.43	0.51



16.2 Hotspot Exposure Conditions

WWAN Band		Exposure Position	1	2	3	4	1+2			1+3+4		
			WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth	Summed 1g SAR (W/kg)	Case No	SPLSR	Summed 1g SAR (W/kg)	Case No	SPLSR
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)						
GSM	GSM850	Front	1.080	0.326	0.135	0.025	1.41			1.24		
		Back	1.212	0.499	0.504	0.041	1.71	#01	0.02	1.76	#02	0.02
		Left Side	0.155				0.16			0.16		
		Right Side	0.494	0.499	0.163	0.028	0.99			0.69		
		Top Side		0.499	0.504	0.029	0.50			0.53		
	Bottom Side	0.921				0.92			0.92			
	GSM1900	Front	0.987	0.326	0.135	0.025	1.31			1.15		
		Back	1.279	0.499	0.504	0.041	1.78	#03	0.02	1.82	#04	0.02
		Left Side	0.042				0.04			0.04		
		Right Side	0.530	0.499	0.163	0.028	1.03			0.72		
Top Side			0.499	0.504	0.029	0.50			0.53			
Bottom Side	1.033				1.03			1.03				
WCDMA	Band V	Front	0.977	0.326	0.135	0.025	1.30			1.14		
		Back	1.150	0.499	0.504	0.041	1.65	#05	0.01	1.70	#06	0.02
		Left Side	0.131				0.13			0.13		
		Right Side	0.373	0.499	0.163	0.028	0.87			0.56		
		Top Side		0.499	0.504	0.029	0.50			0.53		
	Bottom Side	0.668				0.67			0.67			
	Band II	Front	0.696	0.326	0.135	0.025	1.02			0.86		
		Back	1.021	0.499	0.504	0.041	1.52			1.57		
		Left Side	0.028				0.03			0.03		
		Right Side	0.429	0.499	0.163	0.028	0.93			0.62		
Top Side			0.499	0.504	0.029	0.50			0.53			
Bottom Side	0.793				0.79			0.79				
LTE	Band 5	Front	1.012	0.326	0.135	0.025	1.34			1.17		
		Back	1.056	0.499	0.504	0.041	1.56			1.60	#07	0.01
		Left Side	0.118				0.12			0.12		
		Right Side	0.410	0.499	0.163	0.028	0.91			0.60		
		Top Side		0.499	0.504	0.029	0.50			0.53		
	Bottom Side	0.775				0.78			0.78			
	Band 7	Front	1.265	0.326	0.135	0.025	1.59			1.43		
		Back	1.355	0.499	0.504	0.041	1.85	#08	0.02	1.90	#09	0.02
		Left Side	0.390				0.39			0.39		
		Right Side		0.499	0.163	0.028	0.50			0.19		
		Top Side		0.499	0.504	0.029	0.50			0.53		
	Bottom Side	1.041				1.04			1.04			
	Band 41	Front	1.123	0.326	0.135	0.025	1.45			1.28		
		Back	1.439	0.499	0.504	0.041	1.94	#10	0.02	1.98	#11	0.02
		Left Side	0.291				0.29			0.29		
Right Side			0.499	0.163	0.028	0.50			0.19			
Top Side			0.499	0.504	0.029	0.50			0.53			
Bottom Side	1.415				1.42			1.42				



16.3 Body-Worn Accessory Exposure Conditions

WWAN Band		Exposure Position	1	2	3	4	1+2			1+3+4		
			WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth	Summed 1g SAR (W/kg)	Case No	SPLSR	Summed 1g SAR (W/kg)	Case No	SPLSR
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)						
GSM	GSM850	Front	1.080	0.326	0.185	0.025	1.41			1.29		
		Back	1.212	0.499	0.662	0.041	1.71	#01	0.02	1.92	#12	0.02
		Back at 5mm Headset	1.131				1.13			1.13		
	GSM1900	Front	0.987	0.326	0.185	0.025	1.31			1.20		
		Back	1.279	0.499	0.662	0.041	1.78	#03	0.02	1.98	#13	0.02
		Back at 5mm Headset	1.152				1.15			1.15		
WCDMA	Band V	Front	0.977	0.326	0.185	0.025	1.30			1.19		
		Back	1.150	0.499	0.662	0.041	1.65	#05	0.01	1.85	#14	0.02
	Band II	Front	0.696	0.326	0.185	0.025	1.02			0.91		
		Back	1.021	0.499	0.662	0.041	1.52			1.72	#15	0.02
LTE	Band 5	Front	1.012	0.326	0.185	0.025	1.34			1.22		
		Back	1.056	0.499	0.662	0.041	1.56			1.76	#16	0.02
	Band 7	Front	1.265	0.326	0.185	0.025	1.59			1.48		
		Back	1.355	0.499	0.662	0.041	1.85	#08	0.02	2.06	#17	0.02
		Front at 5mm Headset	1.231				1.23			1.23		
		Back at 5mm Headset	1.399				1.40			1.40		
	Band 41	Front	1.123	0.326	0.185	0.025	1.45			1.33		
		Back	1.439	0.499	0.662	0.041	1.94	#10	0.02	2.14	#18	0.02
		Back at 5mm Headset	1.307				1.31			1.31		

16.4 Product specific 10g SAR Exposure Conditions

WWAN Band		Exposure Position	1	2	1+2 Summed 10g SAR (W/kg)
			WWAN	5GHz WLAN	
			10g SAR (W/kg)	10g SAR (W/kg)	
GSM	GSM850	Front	1.765	0.674	2.44
		Back	1.373	0.674	2.05
		Bottom side	0.805		0.81
	GSM1900	Back	1.524	0.674	2.20
		Bottom side	1.975		1.98
WCDMA	Band V	Front	1.353	0.674	2.03
		Back	1.619	0.674	2.29
	Band II	Front	1.433	0.674	2.11
		Back	1.993	0.674	2.67
		Bottom side	0.724		0.72
LTE	Band 5	Front	2.104	0.674	2.78
		Back	1.787	0.674	2.46
	Band 7	Front	1.782	0.674	2.46
		Back	2.509	0.674	3.18
		Bottom side	2.519		2.52
	Band 41	Back	1.911	0.674	2.59
		Bottom side	1.379		1.38


Remark: For Bluetooth Product specific 10g stand-alone SAR is not required for a transmitter or antenna, due to 1g hotspot SAR is <1.2W/kg.

16.5 SPLSR Evaluation and Analysis


General Note:

1. When standalone SAR is measured for both antennas in the pair, the peak location separation distance is computed by the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates in the area scans or extrapolated peak SAR locations in the zoom scans, as appropriate.
2. $SPLSR = (SAR1 + SAR2)1.5 / (\text{min. separation distance, mm})$. If $SPLSR \leq 0.04$ for 1g SAR and $SPLSR \leq 0.10$ for 10g SAR, simultaneously transmission SAR measurement is not necessary.


Case #1	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	GSM850	Back	1.212	5mm	2.9	-78.3	-2	147.8	1.71	0.02	Not required
	WLAN2.4GHz		0.499	5mm	-31	65.6	-1.94				

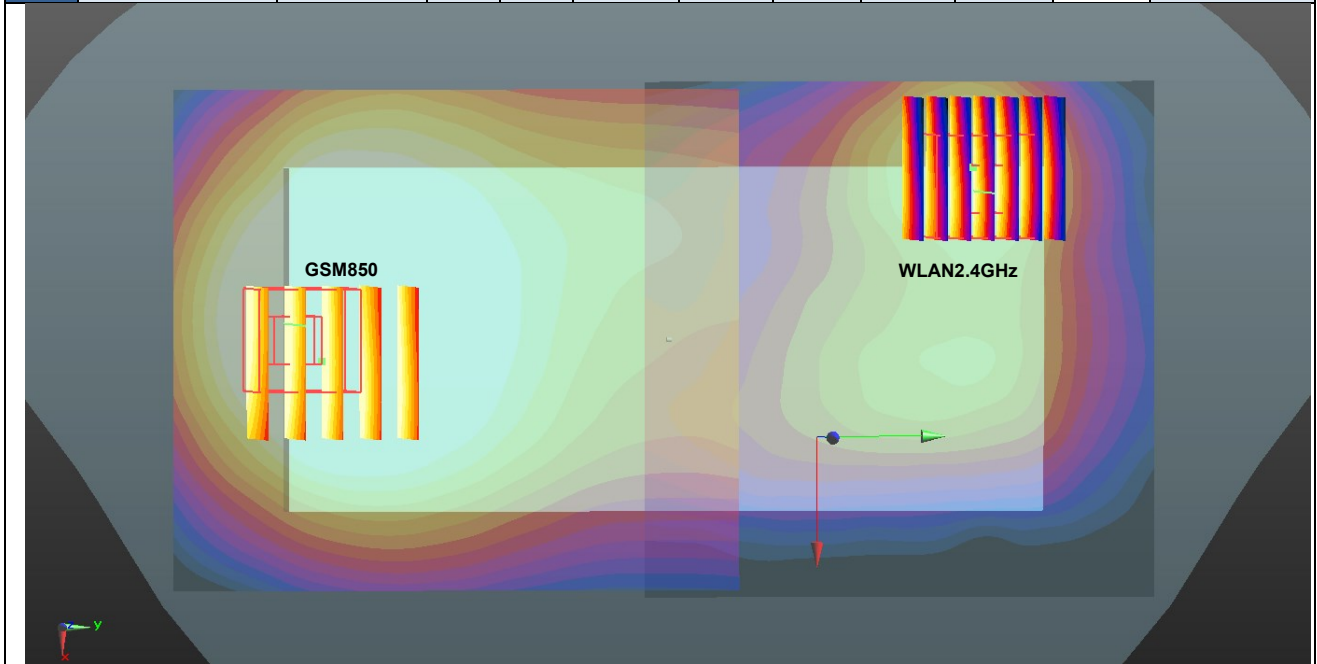


Case #02	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case #02	GSM850	Back	1.212	5mm	2.9	-78.3	-2	136.7	1.76	0.02	Not required
	Bluetooth		0.041	5mm	-30.8	67.6	-1.89				
	WLAN5GHz		0.504	5mm	-23.4	55.8	-2.78				
Case #02	GSM850	Back	1.212	5mm	2.9	-78.3	-2	149.7	1.76	0.02	Not required
	WLAN5GHz		0.504	5mm	-23.4	55.8	-2.78				
	Bluetooth		0.041	5mm	-30.8	67.6	-1.89				

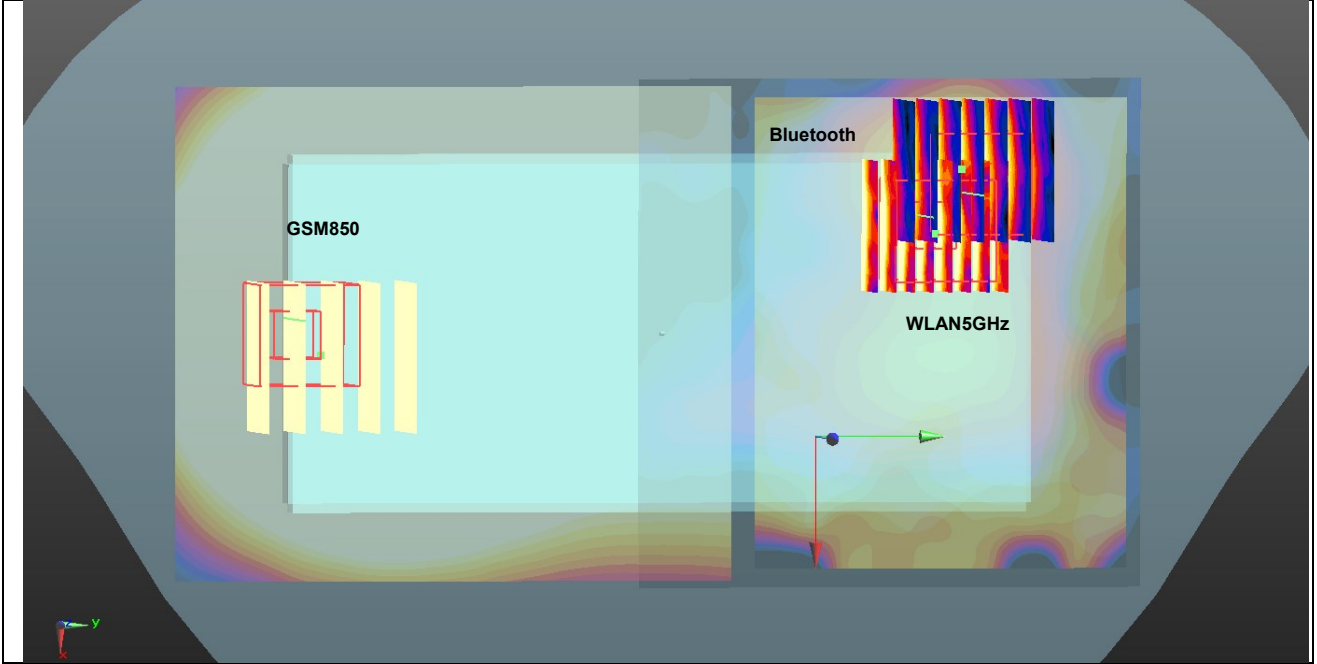


Case #3	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	GSM1900 Cube0	Back	1.279	5mm	-40.9	-68.5	-1.79	134.5	1.78	0.02	Not required
	WLAN2.4GHz		0.499	5mm	-31	65.6	-1.94				
	GSM1900 Cube1	Back	1.270	5mm	-13.5	-77.4	-1.71	144.1	1.77	0.02	Not required
	WLAN2.4GHz		0.499	5mm	-31	65.6	-1.94				

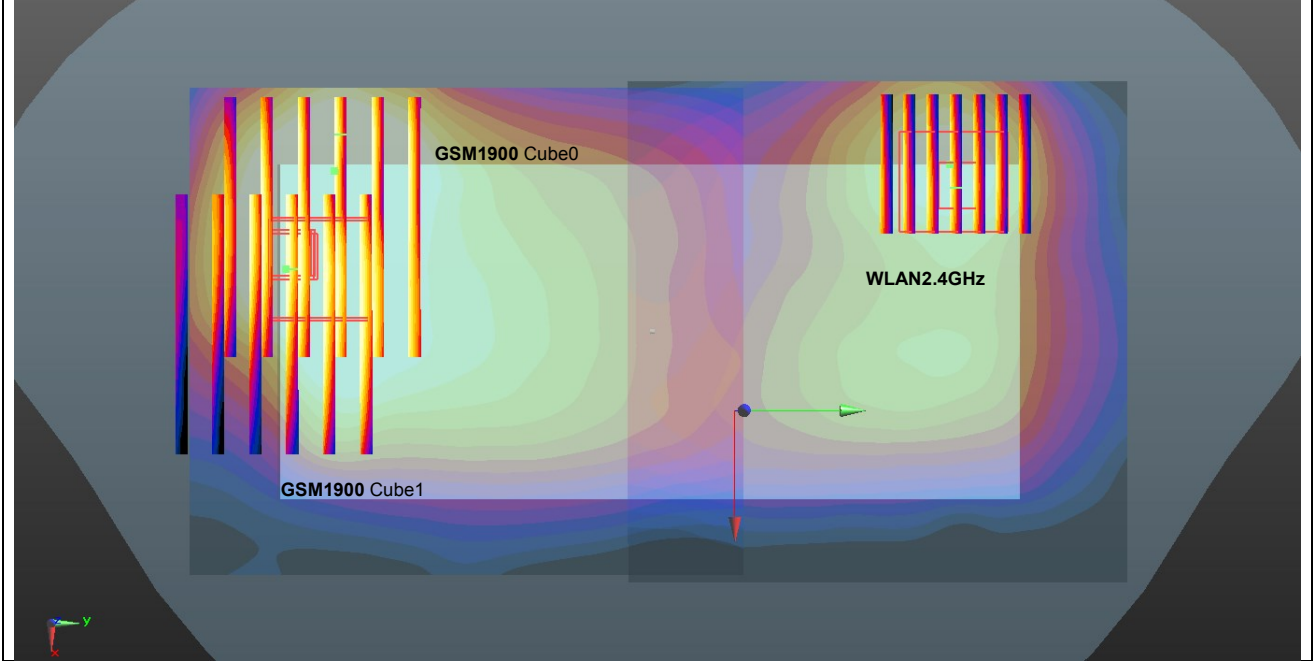


Case #04	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case #04	GSM1900 Cube0	Back	1.279	5mm	-40.9	-68.5	-1.79	125.5	1.82	0.02	Not required
	Bluetooth		0.041	5mm	-30.8	67.6	-1.89				
	WLAN5GHz		0.504	5mm	-23.4	55.8	-2.78				
	GSM1900 Cube0	Back	1.279	5mm	-40.9	-68.5	-1.79	136.5	1.82	0.02	Not required
	WLAN5GHz		0.504	5mm	-23.4	55.8	-2.78				
	Bluetooth		0.041	5mm	-30.8	67.6	-1.89				
	GSM1900 Cube1	Back	1.270	5mm	-13.5	-77.4	-1.71	133.6	1.81	0.02	Not required
	Bluetooth		0.041	5mm	-30.8	67.6	-1.89				
	WLAN5GHz		0.504	5mm	-23.4	55.8	-2.78				
	GSM1900 Cube1	Back	1.270	5mm	-13.5	-77.4	-1.71	146.0	1.81	0.02	Not required
	WLAN5GHz		0.504	5mm	-23.4	55.8	-2.78				
	Bluetooth		0.041	5mm	-30.8	67.6	-1.89				

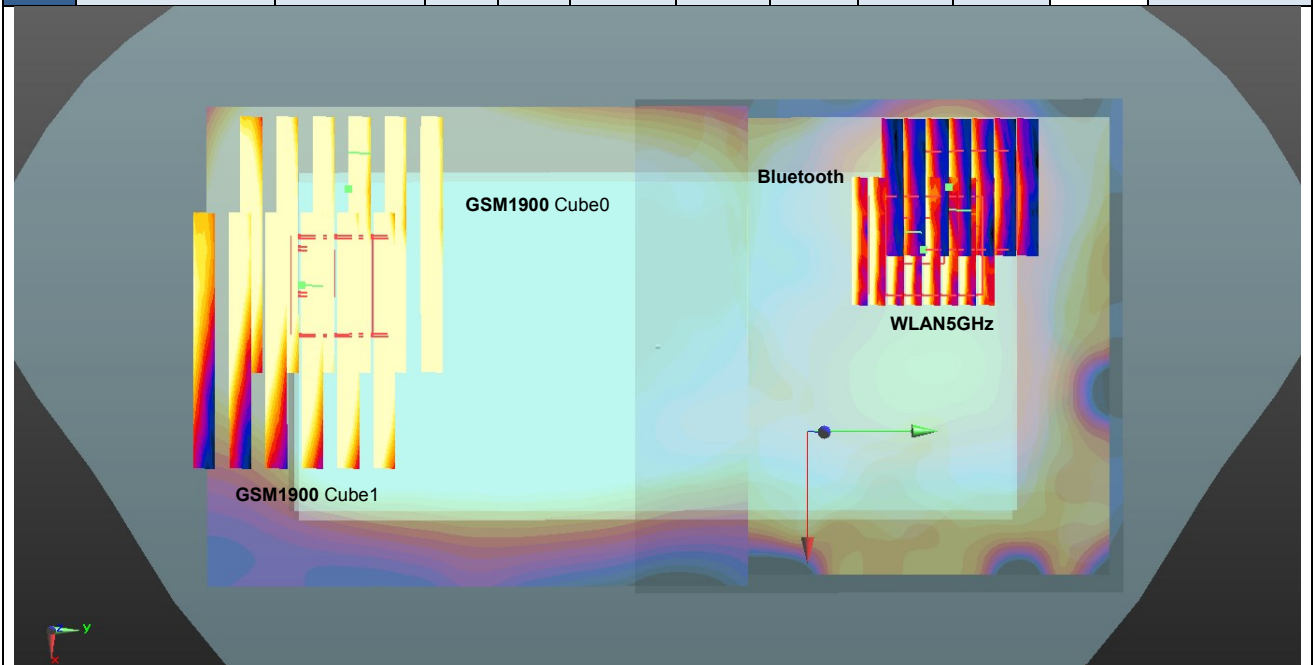


Case #05	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA Band V	Back	1.150	5mm	4.4	-81.5	-1.98	151.3	1.65	0.01	Not required
	WLAN2.4GHz		0.499	5mm	-31	65.6	-1.94				

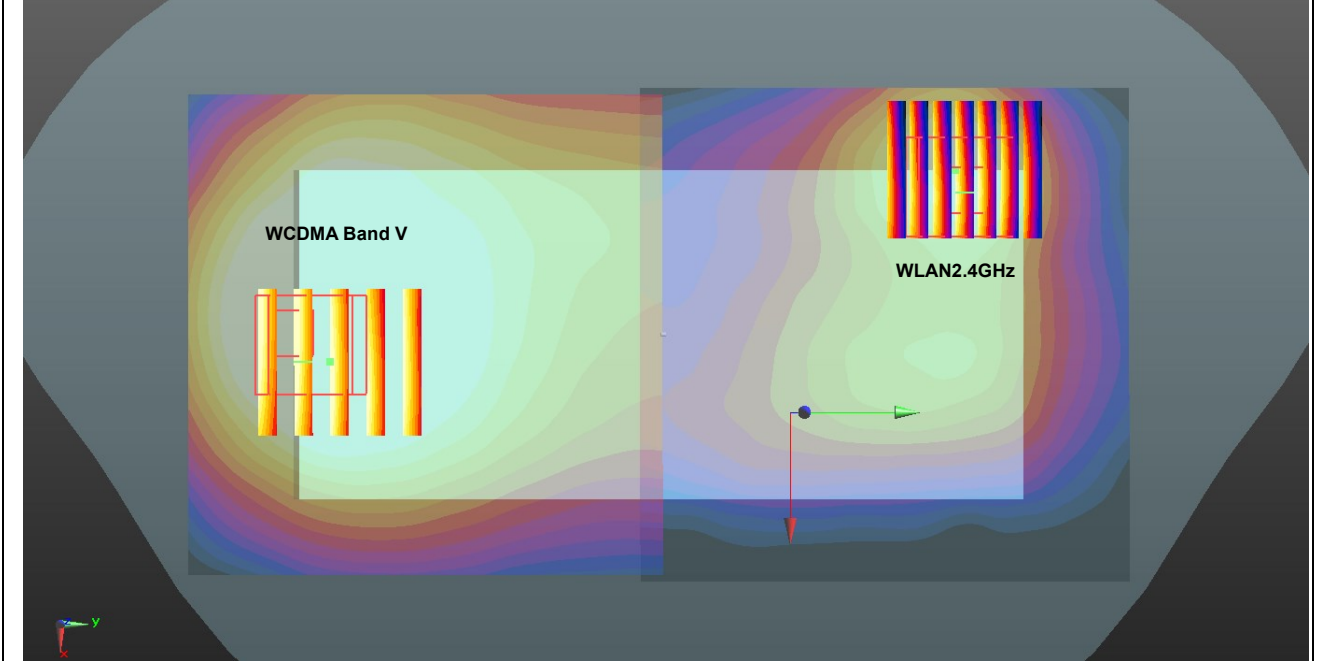


Case #06	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case #06	WCDMA Band V	Back	1.150	5mm	4.4	-81.5	-1.98	140.1	1.70	0.02	Not required
	Bluetooth		0.041	5mm	-30.8	67.6	-1.89				
	WLAN5GHz		0.504	5mm	-23.4	55.8	-2.78				
Case #06	WCDMA Band V	Back	1.150	5mm	4.4	-81.5	-1.98	153.2	1.70	0.01	Not required
	WLAN5GHz		0.504	5mm	-23.4	55.8	-2.78				
	Bluetooth		0.041	5mm	-30.8	67.6	-1.89				

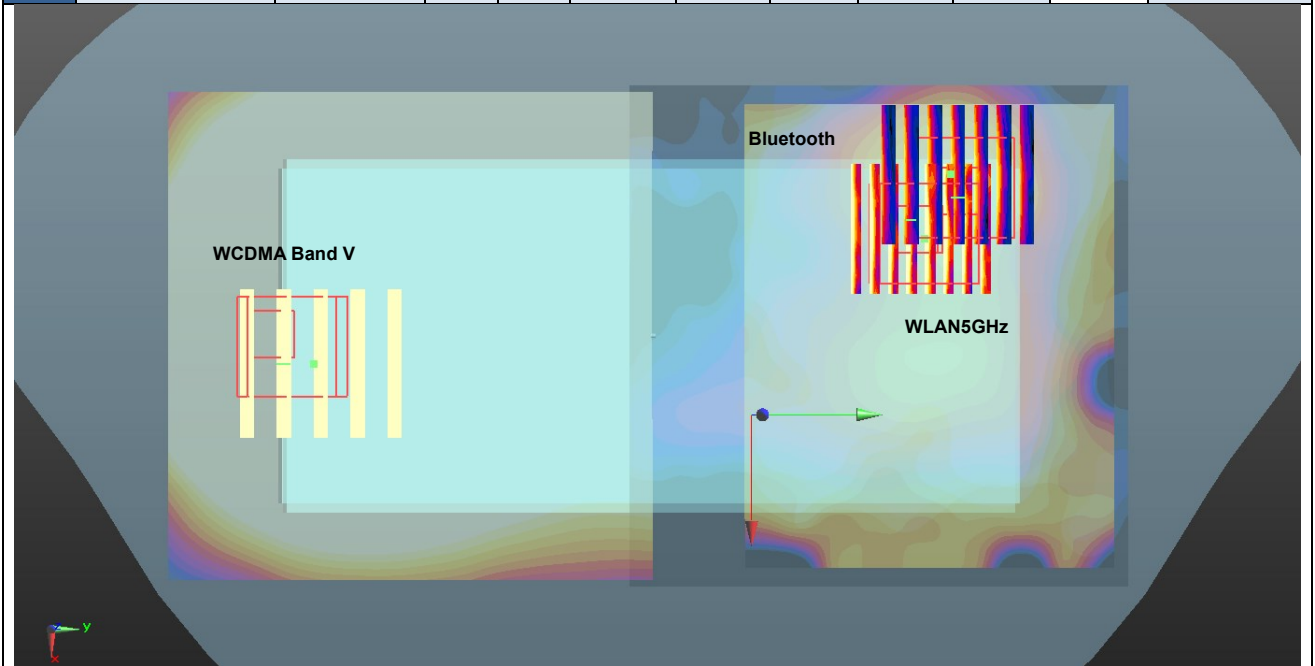


Case #07	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case #07	LTE Band 5	Back	1.056	5mm	4.4	-81.5	-1.96	140.1	1.60	0.01	Not required
	Bluetooth		0.041	5mm	-30.8	67.6	-1.89				
	WLAN5GHz		0.504	5mm	-23.4	55.8	-2.78				
	LTE Band 5	Back	1.056	5mm	4.4	-81.5	-1.96	153.2	1.60	0.01	Not required
	WLAN5GHz		0.504	5mm	-23.4	55.8	-2.78				
	Bluetooth		0.041	5mm	-30.8	67.6	-1.89				

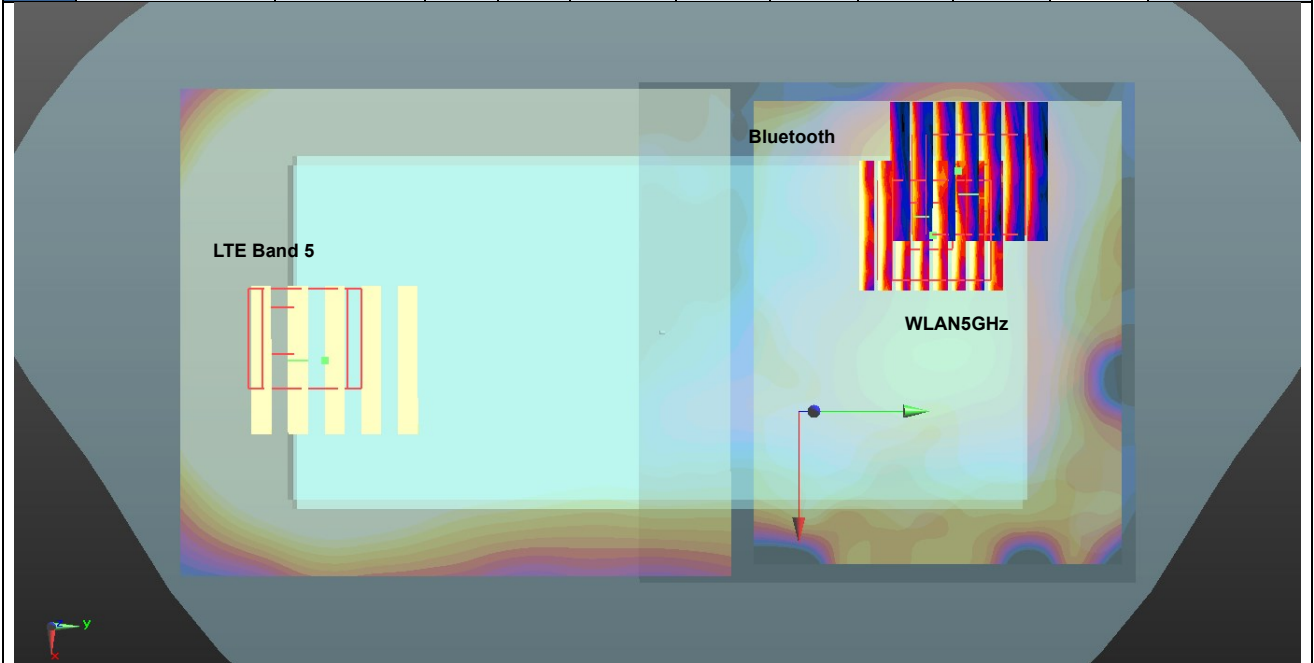


Case #08	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case #08	LTE Band 7 cube0	Back	1.355	5mm	21	-68.4	-1.7	143.7	1.85	0.02	Not required
	WLAN2.4GHz		0.499	5mm	-31	65.6	-1.94				
	LTE Band 7 cube1	Back	1.287	5mm	-15.6	-78.2	-1.8	144.6	1.79	0.02	Not required
	WLAN2.4GHz		0.499	5mm	-31	65.6	-1.94				

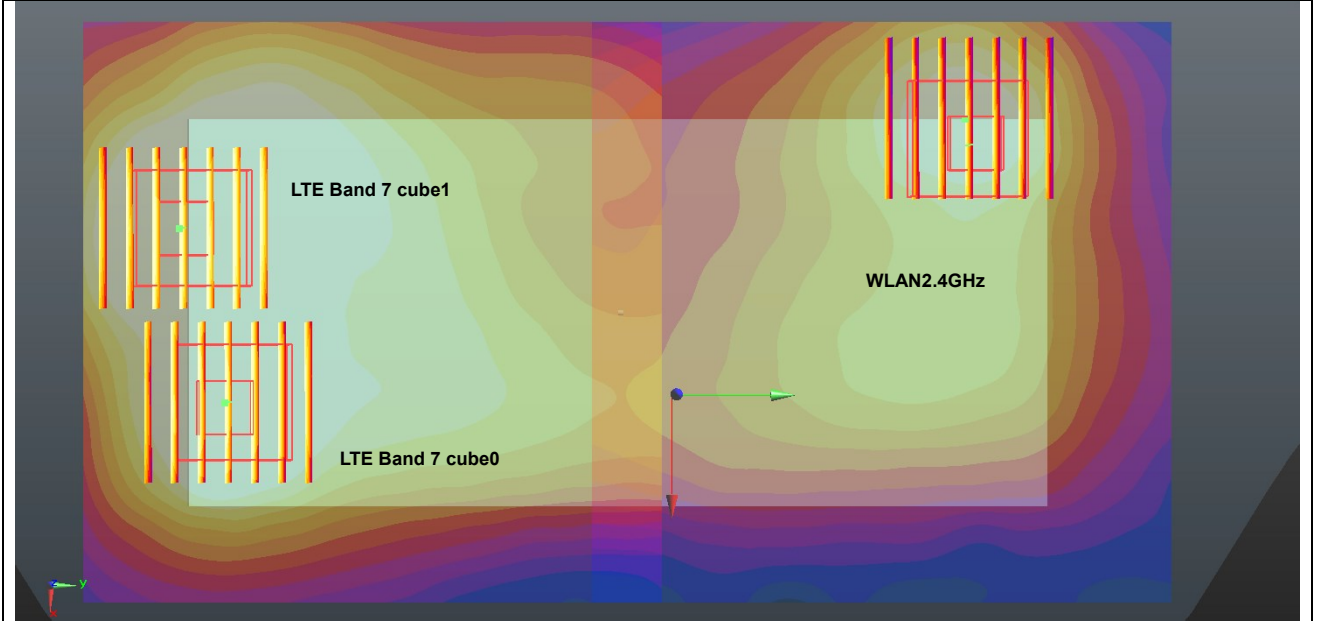


Case #09	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case #09	LTE Band 7 Cube0	Back	1.355	5mm	21	-68.4	-1.7	131.9	1.90	0.02	Not required
	Bluetooth		0.041	5mm	-30.8	67.6	-1.89				
	WLAN5GHz		0.504	5mm	-23.4	55.8	-2.78				
	LTE Band 7 Cube0	Back	1.355	5mm	21	-68.4	-1.7	145.5	1.90	0.02	Not required
	WLAN5GHz		0.504	5mm	-23.4	55.8	-2.78				
	Bluetooth		0.041	5mm	-30.8	67.6	-1.89				
	LTE Band 7 Cube1	Back	1.287	5mm	-15.6	-78.2	-1.8	134.2	1.83	0.02	Not required
	Bluetooth		0.041	5mm	-30.8	67.6	-1.89				
	WLAN5GHz		0.504	5mm	-23.4	55.8	-2.78				
	LTE Band 7 Cube1	Back	1.287	5mm	-15.6	-78.2	-1.8	146.6	1.83	0.02	Not required
	WLAN5GHz		0.504	5mm	-23.4	55.8	-2.78				
	Bluetooth		0.041	5mm	-30.8	67.6	-1.89				

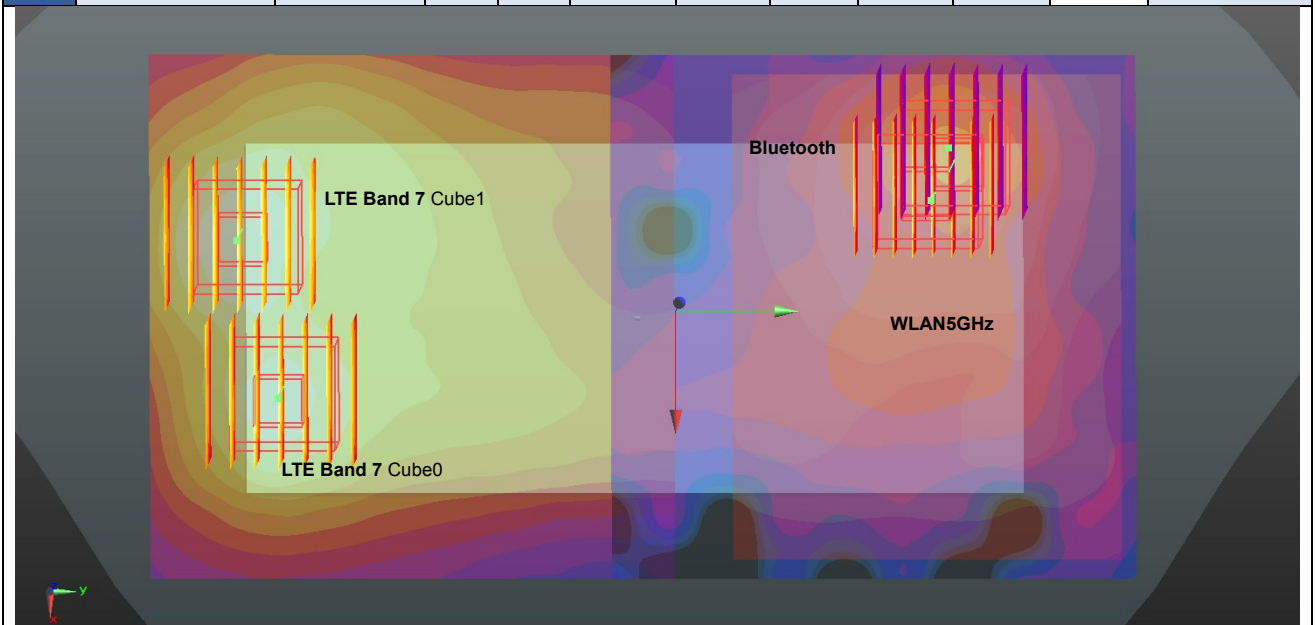

Case #10	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case #10	LTE Band 41 Cube 0	Back	1.439	5mm	21	-73.6	-1.31	148.6	1.94	0.02	Not required
	WLAN2.4GHz		0.499	5mm	-31	65.6	-1.94				
	LTE Band 41 Cube 1	Back	1.197	5mm	-16.8	-81.2	-1.59	147.5	1.70	0.01	Not required
	WLAN2.4GHz		0.499	5mm	-31	65.6	-1.94				

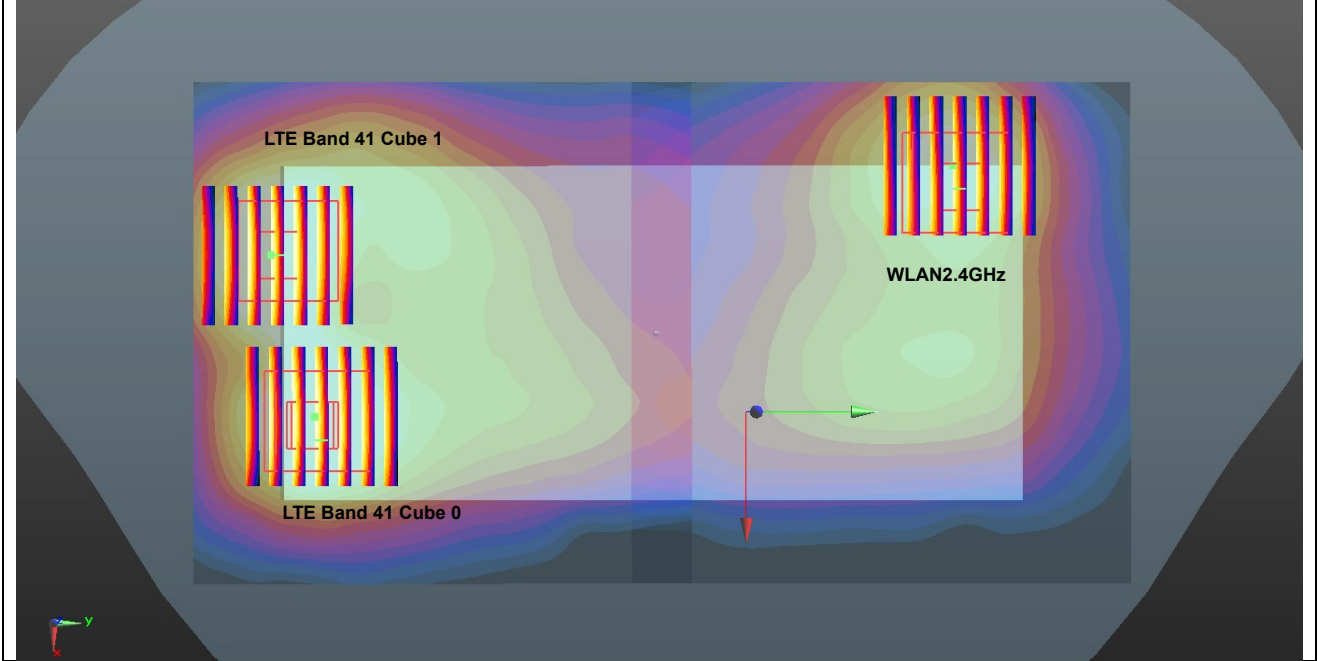

Case #11	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case #11	LTE Band 41 Cube0	Back	1.439	5mm	21	-73.6	-1.31	136.8	1.98	0.02	Not required
	Bluetooth		0.041	5mm	-30.8	67.6	-1.89				
	WLAN5GHz		0.504	5mm	-23.4	55.8	-2.78				
	LTE Band 41 Cube0	Back	1.439	5mm	21	-73.6	-1.31	150.4	1.98	0.02	Not required
	WLAN5GHz		0.504	5mm	-23.4	55.8	-2.78				
	Bluetooth		0.041	5mm	-30.8	67.6	-1.89				
	LTE Band 41 Cube1	Back	1.197	5mm	-16.8	-81.2	-1.59	137.2	1.74	0.02	Not required
	Bluetooth		0.041	5mm	-30.8	67.6	-1.89				
	WLAN5GHz		0.504	5mm	-23.4	55.8	-2.78				
	LTE Band 41 Cube1	Back	1.197	5mm	-16.8	-81.2	-1.59	149.5	1.74	0.02	Not required
	WLAN5GHz		0.504	5mm	-23.4	55.8	-2.78				
	Bluetooth		0.041	5mm	-30.8	67.6	-1.89				

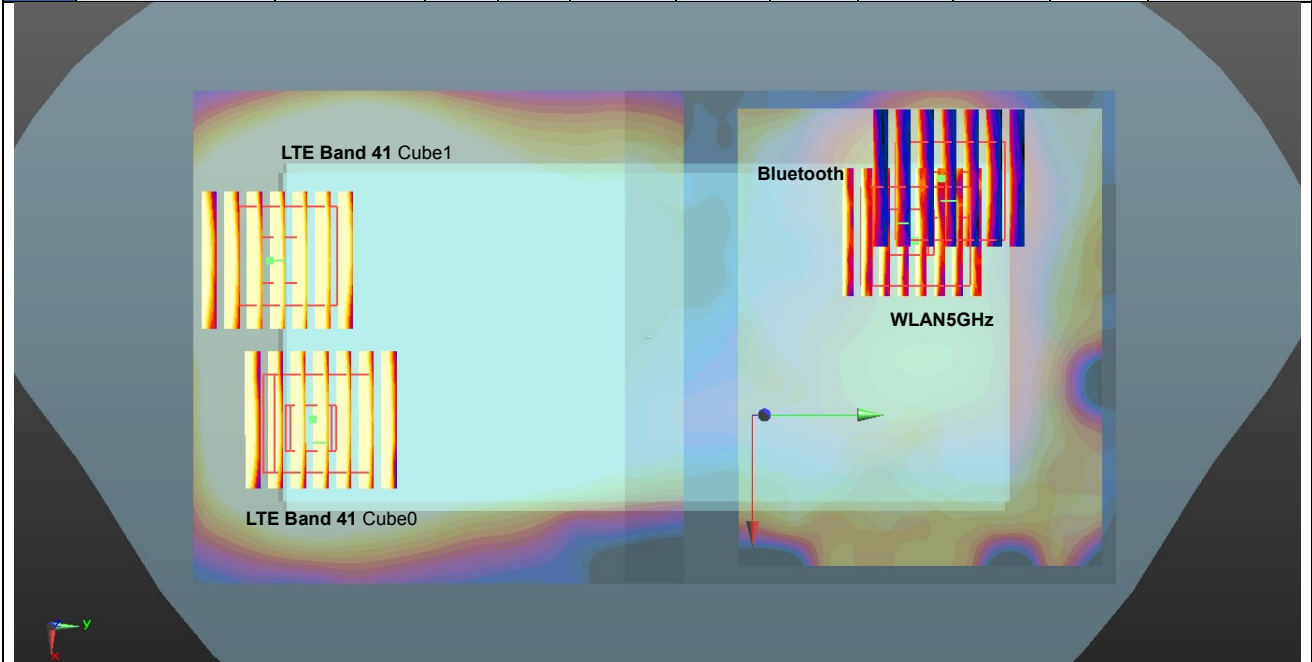

Case #12	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case #12	GSM850	Back	1.212	5mm	2.9	-78.3	-2	142.9	1.92	0.02	Not required
	Bluetooth		0.041	5mm	-30.8	67.6	-1.89				
	WLAN5GHz		0.662	5mm	-24	62	-2.6				
Case #12	GSM850	Back	1.212	5mm	2.9	-78.3	-2	149.7	1.92	0.02	Not required
	WLAN5GHz		0.662	5mm	-24	62	-2.6				
	Bluetooth		0.041	5mm	-30.8	67.6	-1.89				

