

FCC SAR Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2005-3
FCC ID : IHDT56YA3
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013

The product was received on Feb. 21, 2019 and testing was started from Mar. 28, 2019 and completed on Apr. 08, 2019. We, Sporton International (Kunshan) Inc, would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



Approved by: Mark Qu / Manager



Sporton International (Kunshan) Inc.
No. 1098, Pengxi North Road, Kunshan Economic Development Zone,
Jiangsu Province 215335, China



Table of Contents

1. Statement of Compliance 4
2. Administration Data 5
3. Guidance Applied..... 5
4. Equipment Under Test (EUT) Information 6
4.1 General Information 6
4.2 General LTE SAR Test and Reporting Considerations 8
5. Proximity Sensor Triggering Test..... 11
5.1 Proximity sensor triggering distances(Per KDB616217§6.2) 11
6. RF Exposure Limits..... 18
6.1 Uncontrolled Environment..... 18
6.2 Controlled Environment..... 18
7. Specific Absorption Rate (SAR)..... 19
7.1 Introduction 19
7.2 SAR Definition..... 19
8. System Description and Setup 20
8.1 E-Field Probe 21
8.2 Data Acquisition Electronics (DAE) 21
8.3 Phantom..... 22
8.4 Device Holder..... 23
9. Measurement Procedures 24
9.1 Spatial Peak SAR Evaluation 24
9.2 Power Reference Measurement..... 25
9.3 Area Scan 25
9.4 Zoom Scan..... 26
9.5 Volume Scan Procedures..... 26
9.6 Power Drift Monitoring..... 26
10. Test Equipment List..... 27
11. System Verification 28
11.1 Tissue Simulating Liquids 28
11.2 Tissue Verification 29
11.3 System Performance Check Results 30
12. RF Exposure Positions 31
12.1 Ear and handset reference point 31
12.2 Definition of the cheek position 32
12.3 Definition of the tilt position 33
12.4 Body Worn Accessory 34
12.5 Wireless Router..... 34
13. Conducted RF Output Power (Unit: dBm)..... 35
14. Antenna Location 124
15. SAR Test Results 125
15.1 Head SAR 128
15.2 Hotspot SAR 132
15.3 Body Worn Accessory SAR 139
15.4 TDD LTE Band 41(HPUE) Linearity Data Analysis..... 144
15.5 Repeated SAR Measurement 145
16. Simultaneous Transmission Analysis 146
16.1 Head Exposure Conditions 147
16.2 Hotspot Exposure Conditions..... 149
16.3 Body-Worn Accessory Exposure Conditions 151
16.4 SPLSR Evaluation and Analysis..... 152
17. Uncertainty Assessment 197
18. References 198
Appendix A. Plots of System Performance Check
Appendix B. Plots of High SAR Measurement
Appendix C. DASYS Calibration Certificate
Appendix D. Test Setup Photos



Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA922110	Rev. 01	Initial issue of report	Apr. 25, 2019



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Motorola Mobility LLC, Mobile Cellular Phone, XT2005-3**, are as follows.

Highest 1g SAR Summary						
Equipment Class	Frequency Band		Head (Separation 0mm)	Hotspot (Separation 5mm)	Body-worn (Separation 5mm)	Highest Simultaneous Transmission 1g SAR (W/kg)
			1g SAR (W/kg)			
Licensed	GSM	GSM850	0.75	1.03	1.03	1.52
		GSM1900	0.33	1.35	1.35	
	WCDMA	Band V	0.72	1.38	1.26	
		Band IV	0.52	1.24	1.17	
		Band II	0.86	1.42	1.41	
	CDMA2000	BC0	0.61	1.14	1.32	
		BC10	0.67	1.23	1.17	
		BC1	0.67	1.37	1.42	
	LTE	Band 71	0.37	0.62	0.62	
		Band 12	0.58	0.89	0.86	
		Band 26/Band 5	0.67	1.25	1.04	
		Band 66/Band 4	0.61	1.37	1.44	
		Band 25/Band 2	0.73	1.42	1.42	
	Band 41	0.24	1.38	1.38		
DTS	WLAN	2.4GHz WLAN	1.18	1.19	1.19	1.52
NII		5GHz WLAN	0.49	1.17	1.17	1.44
DSS	Bluetooth	2.4GHz Bluetooth	0.14	<0.10	<0.10	1.51
Date of Testing:			2019/3/28~2019/4/8			
Remark: This device supports LTE B2 / B4 / B5 and B25 / B66 / B26. Since the supported frequency span for LTE B2 / B4 / B5 falls completely within the supports frequency span for LTE B25 / B66 / B26, both LTE bands have the same target power, and both LTE bands share the same transmission path; therefore, SAR was only assessed for LTE B25 / B66 / B26.						

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.



2. Administration Data

Testing Laboratory	
Test Site	Sporton International (Kunshan) Inc.
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone, Jiangsu Province 215335, China TEL : 86-512-57900158 FAX : 86-512-57900958

Applicant	
Company Name	Motorola Mobility LLC
Address	222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

Manufacturer	
Company Name	Motorola Mobility LLC
Address	222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01



4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2005-3
FCC ID	IHDT56YA3
IMEI Code	352179100028303
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz CDMA2000 BC0: 824.7 MHz ~ 848.31 MHz CDMA 2000 BC1: 1851.25 MHz ~ 1908.75 MHz CDMA 2000 BC10: 817.9 MHz ~ 823.1 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 25: 1850.7 MHz ~ 1914.3 MHz LTE Band 26: 814.7 MHz ~ 848.3 MHz LTE Band 41: 2498.5 MHz ~ 2687.5 MHz LTE Band 66: 1710.7 MHz ~ 1779.3 MHz LTE Band 71: 665.5 MHz ~ 695.5 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5700 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA HSPA+(16QAM uplink is not supported) LTE: QPSK, 16QAM, 64QAM CDMA2000 : 1xRTT/1xEv-Do(Rev.0)/1xEv-Do(Rev.A) WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 Bluetooth BR/EDR/LE
HW Version	88941-1-12
SW Version	fastboot_surfna_t_oem_t_userdebug_9_PCB29.7_0446_intcfg-test-keys_t
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype
Remark:	
<ol style="list-style-type: none"> This device supports VoIP in GPRS, EGPRS, WCDMA, CDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation. This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications. This device 2.4GHz WLAN/5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WiFi Direct (GC/GO), and 5.3GHz / 5.5GHz supports WiFi Direct (GC only). This device does not support DTM operation and supports GRPS/EGRPS mode up to multi-slot class 12. When the phone is in talking mode and receiver worked, then power reduction will be implemented immediately at WLAN2.4GHz. The device employs proximity sensors that detect the presence of the user's body at the front or back faces of the 	



device. When front or back body worn condition is detected, GSM1900, WCDMA band II/IV, CDMA2000 BC1, LTE band 2/4/25/41/66 and WLAN2.4GHz/WLAN5GHz reduced power will be active. (P-sensor can't work at detecting presence of the user's body at the four edges of the device.)

7. When hotspot mode is enabled, power reduction will be activated to limit the maximum power of GSM1900, WCDMA band II/IV, CDMA2000 BC1, LTE band 2/4/25/41/66 and WLAN2.4GHz/WLAN5GHz.
8. This device hotspot reduced power and P-sensor reduced power level are the same for GSM1900, WCDMA band II, CDMA2000 BC1, LTE band 2/25/41, and WLAN2.4GHz/WLAN5GHz. And for other bands are different.
9. For P-sensor reduced power level is higher than hotspot reduced power, so for front/back P-sensor SAR can represent conservatively for front/back hotspot SAR.
10. This device supports HPUE for LTE band 41 with class 2 level, so HPUE SAR has been performed.
11. There are two type batteries, the same capacity, only difference manufacturer, only chose battery 1 to perform SAR testing.



4.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																															
FCC ID	IHDT56YA3																																																														
Equipment Name	Mobile Cellular Phone																																																														
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 25: 1850.7 MHz ~ 1914.3 MHz LTE Band 26: 814.7 MHz ~ 848.3 MHz LTE Band 41: 2498.5 MHz ~ 2687.5 MHz LTE Band 66: 1710.7 MHz ~ 1779.3 MHz LTE Band 71: 665.5 MHz ~ 695.5 MHz																																																														
Channel Bandwidth	LTE Band 2: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 12: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 25: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 26: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 66: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 71: 5MHz, 10MHz, 15MHz, 20MHz																																																														
uplink modulations used	QPSK, 16QAM and 64QAM																																																														
LTE Voice / Data requirements	Voice and Data																																																														
LTE Release Version	R10, Cat4																																																														
CA Support	Not Supported																																																														
LTE MPR permanently built-in by design	<p>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6" style="text-align: center;">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table>	Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)																																																								
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																									
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																								
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																								
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																								
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																								
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																								
256 QAM	≥ 1						≤ 5																																																								
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																														
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																														
Power reduction applied to satisfy SAR compliance	Yes 1. The device employs proximity sensors that detect the presence of the user's body at the front or back faces of the device. When front or back body worn condition is detected, LTE band 2/4/25/41/66 reduced power will be active. (P-sensor can't work at detecting presence of the user's body at the four edges of the device.) 2. When hotspot mode is enabled, power reduction will be activated to limit the maximum power of LTE band 2/4/25/41/66.																																																														



Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829	20450	829	20450	829
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5
H	20643	848.3	20635	847.5	20625	846.5	20600	844	20600	844	20600	844
LTE Band 12												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	23017	699.7	23025	700.5	23035	701.5	23060	704	23060	704	23060	704
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5
H	23173	715.3	23165	714.5	23155	713.5	23130	711	23130	711	23130	711
LTE Band 25												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26047	1850.7	26055	1851.5	26065	1852.5	26090	1855	26115	1857.5	26140	1860
M	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880
H	26683	1914.3	26675	1913.5	26665	1912.5	26640	1910	26615	1907.5	26590	1905
LTE Band 26												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5	26765	821.5
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5	26965	841.5
LTE Band 41												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506	39750	2506	39750	2506
LM	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5	40185	2549.5	40185	2549.5
M	40620	2593	40620	2593	40620	2593	40620	2593	40620	2593	40620	2593
HM	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5	41055	2636.5	41055	2636.5
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680	41490	2680	41490	2680
LTE Band 66												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770




LTE Band 71								
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	133147	665.5	133172	668	133197	670.5	133222	673
M	133247	675.5	133272	678	133297	680.5	133322	683
H	133447	695.5	133422	693	133397	690.5	133372	688




5. Proximity Sensor Triggering Test

5.1 Proximity sensor triggering distances(Per KDB616217§6.2)

1. Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed and the tissue-equivalent medium for highest frequency (5850MHz) and lowest (1750MHz) frequency was used for proximity sensor triggering testing.
2. Capacitive proximity sensor placed coincident with antenna elements at the top/bottom of the phone are utilized to determine when the device comes in proximity of the user's body at the front or back side surface of the device. There is no need to do sensor coverage testing for the proximity sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the proximity sensor entirely covers the antenna.
3. When the sensor is active, GSM1900, WCDMA band II/IV, CDMA2000 BC1, LTE band 2/4/25/41/66, and WLAN2.4GHz/WLAN5GHz reduced power will be active.
4. The sensors used to detect the proximity of the user's body at the front or back side surface of the device use a detection threshold distance. The data shown in the sections below shows the distance(s).

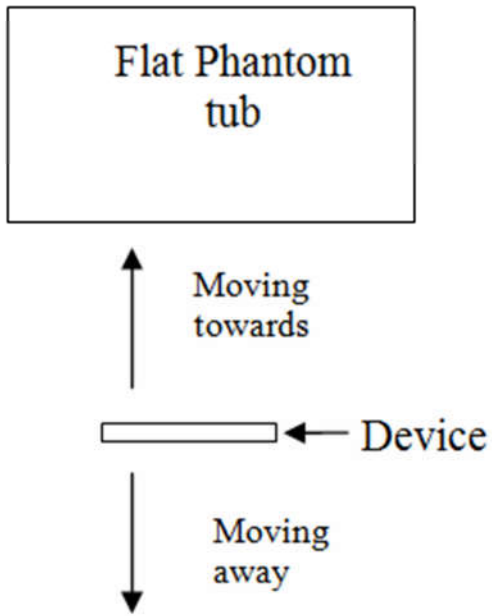

Sensor detection test set-up, front face

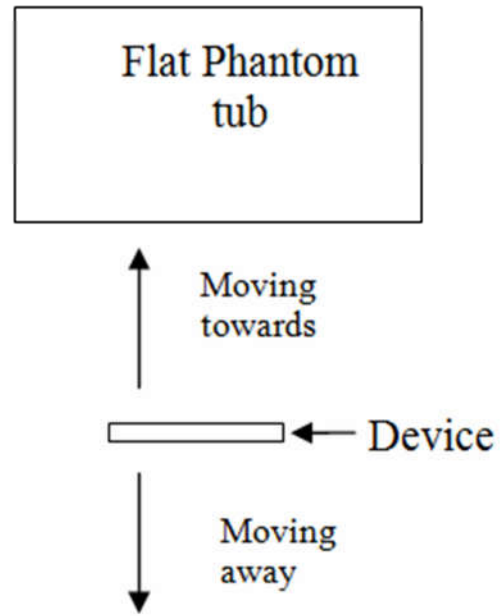

Sensor detection test set-up, back face


Proximity Sensor Triggering Distance (mm)				
Position	Front		Back	
	Moving towards	Moving away	Moving towards	Moving away
Minimum	15	16	19	22

TX. Band	Proximity Sensor Triggering Power (dBm)		
	Full	Reduced	Power Reduction (dB)
	Max. Tune Up Limit (dBm)	Max. Tune Up Limit (dBm)	
GSM1900 GPRS 4Tx slots	24.50	23.50	1.00
WCDMA Band II	24.00	19.00	5.00
WCDMA Band IV	24.00	16.00	8.00
CDMA2000 BC1	25.00	19.50	5.50
LTE Band 2	24.00	20.00	4.00
LTE Band 4	24.00	15.50	8.50
LTE Band 25	24.00	20.00	4.00
LTE Band 66	24.00	15.50	8.50
LTE Band 41 Power Class 3	25.00	20.00	5.00
LTE Band 41 Power Class 2	27.00	20.00	7.00
WLAN 2.4GHz	20.00	18.50	1.50
WLAN 5.2GHz	20.00	13.00	7.00
WLAN 5.3GHz	20.00	13.00	7.00
WLAN 5.5GHz	20.00	9.00	11.00
WLAN 5.8GHz	20.00	11.00	9.00




Proximity Sensor Triggering Distance (mm) and Triggering Power (dBm)

Front																								
Distance	50	47	44	41	38	35	32	29	26	23	20	19	18	17	16	15	14	13	12	11	8	5	2	0
GSM1900 GPRS 4Tx slots	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5
WCDMA Band II	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0
WCDMA Band IV	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0
CDMA2000 BC1	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5
LTE Band2	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0
LTE Band4	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	15.5	15.5	15.5	15.5	15.5	15.5	15.5	15.5	15.5
LTE Band25	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0
LTE Band66	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	15.5	15.5	15.5	15.5	15.5	15.5	15.5	15.5	15.5
LTE Band 41 Power Class 3	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0
LTE Band 41 Power Class 2	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0
WLAN 2.4GHz	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5
WLAN 5.2GHz	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0
WLAN 5.3GHz	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0
WLAN 5.5GHz	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0
WLAN 5.8GHz	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0

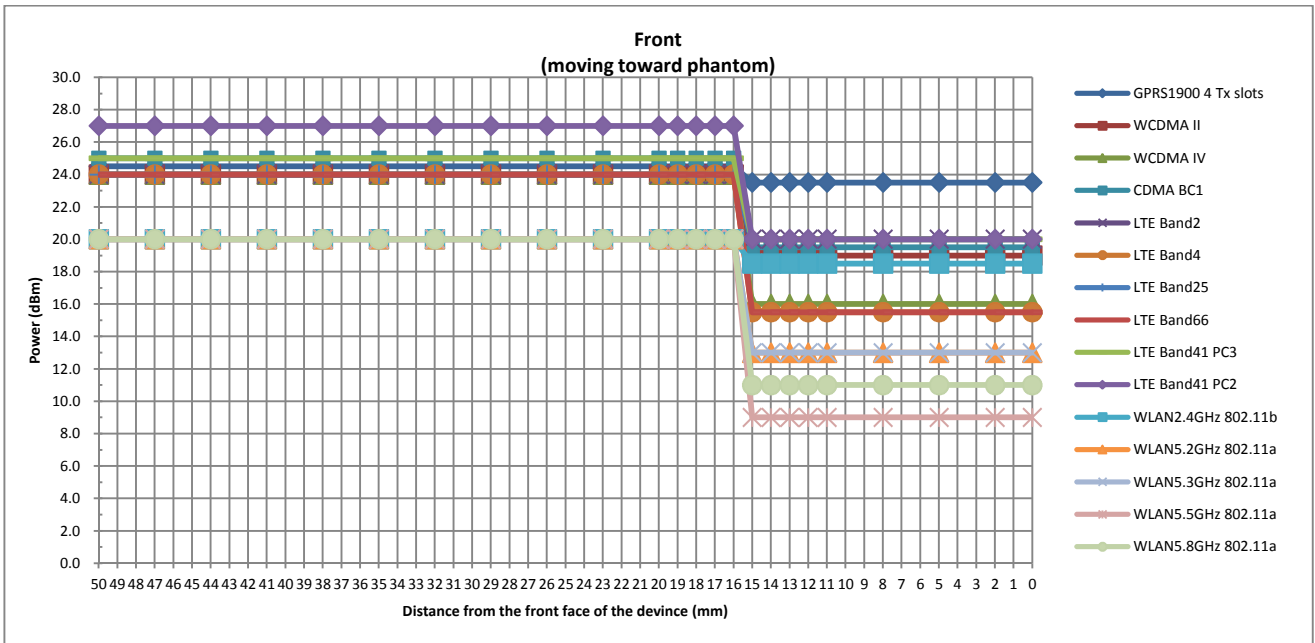




Proximity Sensor Triggering Distance (mm) and Triggering Power (dBm)																								
Front																								
Distance	0	3	6	9	12	15	16	17	18	19	20	21	22	23	24	27	30	33	36	39	42	45	48	50
GSM1900 GPRS 4Tx slots	23.5	23.5	23.5	23.5	23.5	23.5	23.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5
WCDMA Band II	19.0	19.0	19.0	19.0	19.0	19.0	19.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0
WCDMA Band IV	16.0	16.0	16.0	16.0	16.0	16.0	16.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0
CDMA2000 BC1	19.5	19.5	19.5	19.5	19.5	19.5	19.5	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0
LTE Band2	20.0	20.0	20.0	20.0	20.0	20.0	20.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0
LTE Band4	15.5	15.5	15.5	15.5	15.5	15.5	15.5	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0
LTE Band25	20.0	20.0	20.0	20.0	20.0	20.0	20.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0
LTE Band66	15.5	15.5	15.5	15.5	15.5	15.5	15.5	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0
LTE Band 41 Power Class 3	20.0	20.0	20.0	20.0	20.0	20.0	20.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0
LTE Band 41 Power Class 2	20.0	20.0	20.0	20.0	20.0	20.0	20.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0
WLAN 2.4GHz	18.5	18.5	18.5	18.5	18.5	18.5	18.5	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0
WLAN 5.2GHz	13.0	13.0	13.0	13.0	13.0	13.0	13.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0
WLAN 5.3GHz	13.0	13.0	13.0	13.0	13.0	13.0	13.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0
WLAN 5.5GHz	9.0	9.0	9.0	9.0	9.0	9.0	9.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0
WLAN 5.8GHz	11.0	11.0	11.0	11.0	11.0	11.0	11.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0

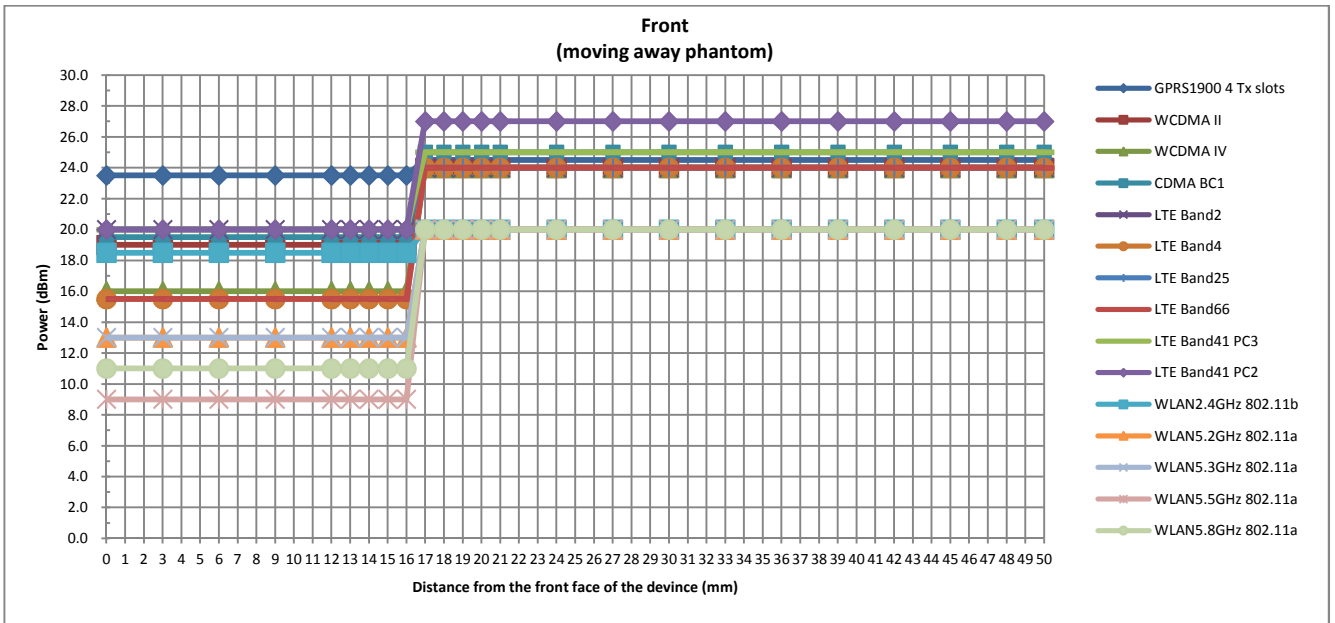




Proximity Sensor Triggering Distance (mm) and Triggering Power (dBm)																									
Back																									
Distance	50	47	44	41	38	35	32	29	26	23	22	21	20	19	18	17	16	15	14	13	10	7	4	1	0
GSM1900 GPRS 4Tx slots	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5
WCDMA Band II	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0
WCDMA Band IV	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0
CDMA2000 BC1	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5
LTE Band2	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0
LTE Band4	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	15.5	15.5	15.5	15.5	15.5	15.5	15.5	15.5	15.5	15.5	15.5	15.5
LTE Band25	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0
LTE Band66	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	15.5	15.5	15.5	15.5	15.5	15.5	15.5	15.5	15.5	15.5	15.5	15.5
LTE Band 41 Power Class 3	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0
LTE Band 41 Power Class 2	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0
WLAN 2.4GHz	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5
WLAN 5.2GHz	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0
WLAN 5.3GHz	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0
WLAN 5.5GHz	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0
WLAN 5.8GHz	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0

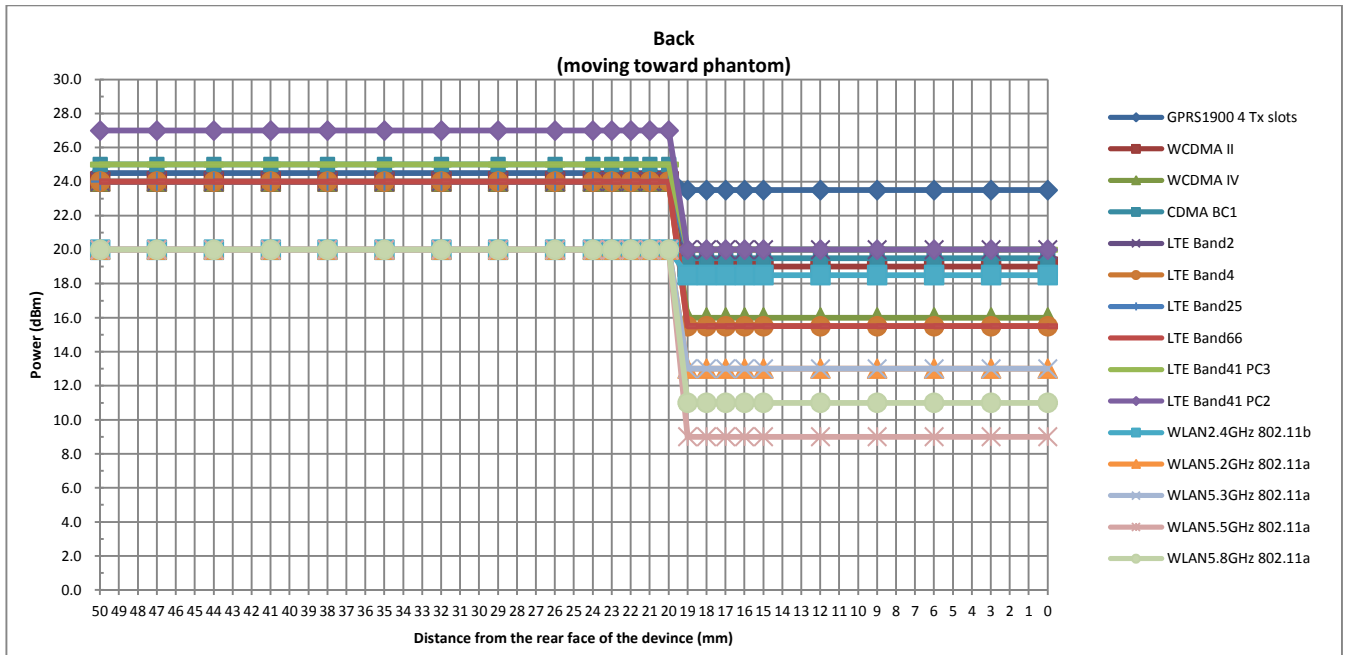



Proximity Sensor Triggering Distance (mm) and Triggering Power (dBm)

Back																								
Distance	0	3	6	9	12	15	16	17	18	19	20	21	22	23	24	27	30	33	36	39	42	45	48	50
GSM1900 GPRS 4Tx slots	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5
WCDMA Band II	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0
WCDMA Band IV	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0
CDMA2000 BC1	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0
LTE Band2	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0
LTE Band4	15.5	15.5	15.5	15.5	15.5	15.5	15.5	15.5	15.5	15.5	15.5	15.5	15.5	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0
LTE Band25	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0
LTE Band66	15.5	15.5	15.5	15.5	15.5	15.5	15.5	15.5	15.5	15.5	15.5	15.5	15.5	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0
LTE Band 41 Power Class 3	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0
LTE Band 41 Power Class 2	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0	27.0
WLAN 2.4GHz	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0
WLAN 5.2GHz	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0
WLAN 5.3GHz	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0
WLAN 5.5GHz	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0
WLAN 5.8GHz	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0

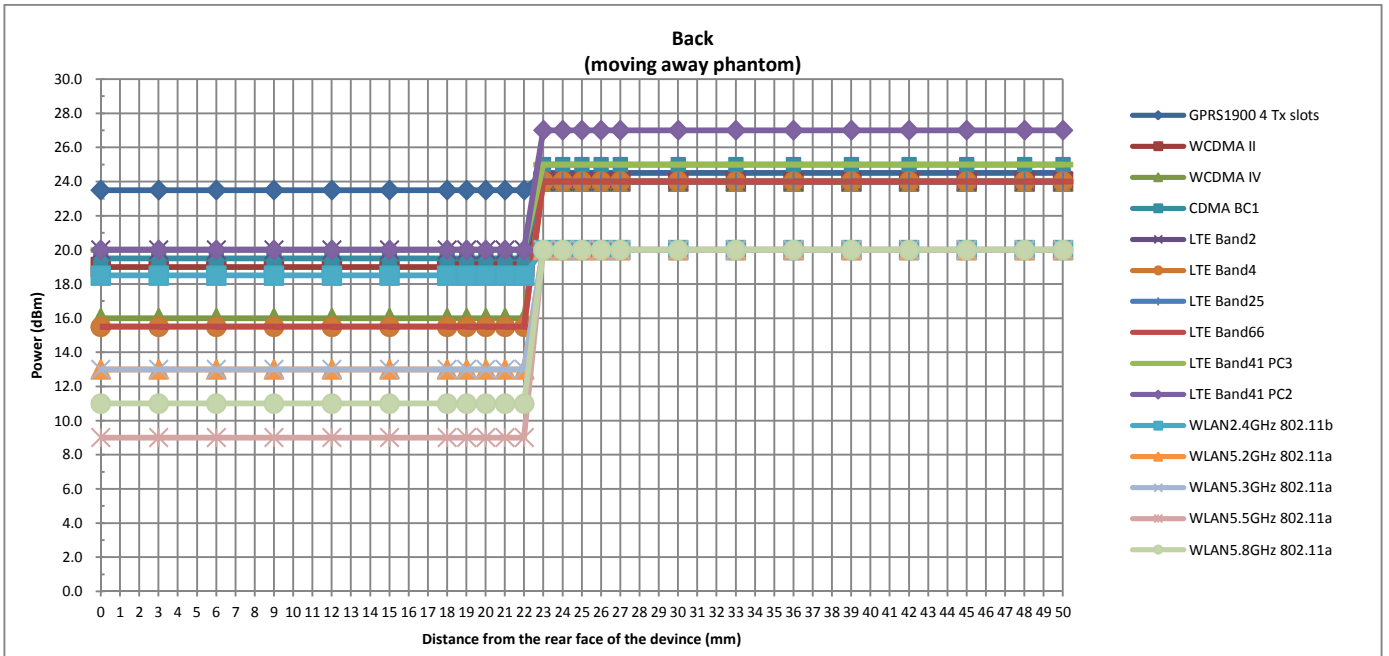

6. RF Exposure Limits

6.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

6.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

7. Specific Absorption Rate (SAR)

7.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

7.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

8. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

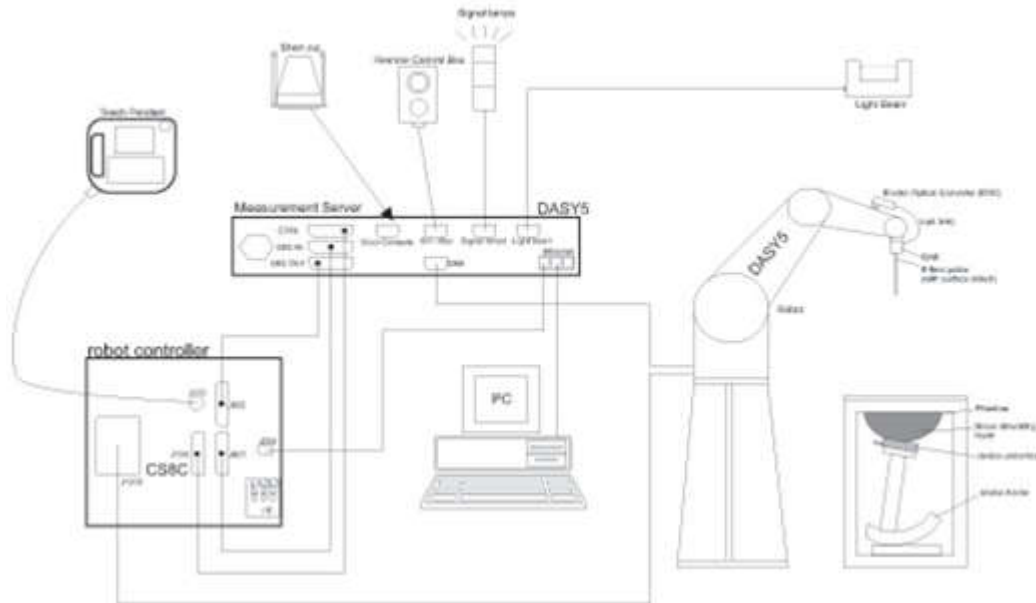

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

8.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Frequency	10 MHz – 4 GHz; Linearity: ±0.2 dB (30 MHz – 4 GHz)
Directivity	±0.2 dB in TSL (rotation around probe axis) ±0.3 dB in TSL (rotation normal to probe axis)
Dynamic Range	5 μW/g – >100 mW/g; Linearity: ±0.2 dB
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm



<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Frequency	10 MHz – >6 GHz Linearity: ±0.2 dB (30 MHz – 6 GHz)
Directivity	±0.3 dB in TSL (rotation around probe axis) ±0.5 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 μW/g – >100 mW/g Linearity: ±0.2 dB (noise: typically <1 μW/g)
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm



8.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Photo of DAE


8.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.


8.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters

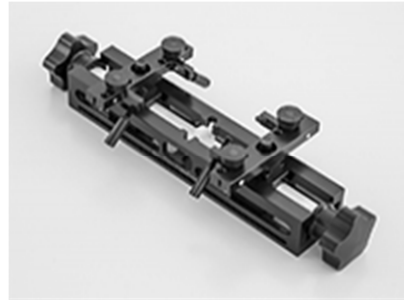

Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

9. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

9.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job’s label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm 3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

* When zoom scan is required and the *reported* SAR from the *area scan based 1-g SAR estimation* procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

9.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



10. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1087	2019/3/27	2020/3/26
SPEAG	835MHz System Validation Kit	D835V2	4d151	2019/3/27	2020/3/26
SPEAG	1750MHz System Validation Kit	D1750V2	1090	2019/3/27	2020/3/26
SPEAG	1900MHz System Validation Kit	D1900V2	5d170	2019/3/26	2020/3/25
SPEAG	2450MHz System Validation Kit	D2450V2	908	2019/3/25	2020/3/24
SPEAG	2600MHz System Validation Kit	D2600V2	1061	2018/12/7	2019/12/6
SPEAG	5000MHz System Validation Kit	D5GHZV2	1006	2018/9/27	2019/9/26
SPEAG	Data Acquisition Electronics	DAE4	1210	2018/5/28	2019/5/27
SPEAG	Data Acquisition Electronics	DAE4	1279	2018/10/22	2019/10/21
SPEAG	Dosimetric E-Field Probe	EX3DV4	3857	2018/5/31	2019/5/30
SPEAG	Dosimetric E-Field Probe	ES3DV3	3279	2019/3/4	2020/3/3
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1842	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1542	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Anritsu	Radio communication analyzer	MT8820C	6201274349	2018/8/16	2019/8/15
Agilent	Wireless Communication Test Set	E5515C	MY52102706	2018/4/17	2019/4/16
Agilent	ENA Series Network Analyzer	E5071C	MY46111157	2018/4/17	2019/4/16
SPEAG	Dielectric Probe Kit	DAK-3.5	1138	2018/11/20	2019/11/19
Anritsu	Vector Signal Generator	MG3710A	6201682672	2019/1/14	2020/1/13
Rohde & Schwarz	Power Meter	NRVD	102081	2018/8/20	2019/8/19
Rohde & Schwarz	Power Sensor	NRV-Z5	100538	2018/8/20	2019/8/19
Rohde & Schwarz	Power Sensor	NRV-Z5	100539	2018/8/20	2019/8/19
R&S	CBT BLUETOOTH TESTER	CBT	101641	2019/1/14	2020/1/13
EXA	Spectrum Analyzer	FSV7	101631	2019/1/14	2020/1/13
Testo	Hygrometer	608-H1	1241332126	2018/8/21	2019/8/20
FLUKE	DIGITAC THERMOMETER	51II	97240029	2018/8/8	2019/8/7
ARRA	Power Divider	A3200-2	N/A	Note	
MCL	Attenuation1	BW-S10W5+	N/A	Note	
MCL	Attenuation2	BW-S10W5+	N/A	Note	
MCL	Attenuation3	BW-S10W5+	N/A	Note	
Agilent	Dual Directional Coupler	778D	20500	Note	
Agilent	Dual Directional Coupler	11691D	MY48151020	Note	
BONN	POWER AMPLIFIER	BLMA 0830-3	087193A	Note	
BONN	POWER AMPLIFIER	BLMA 2060-2	087193B	Note	

Note: Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check.

11. System Verification

11.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.

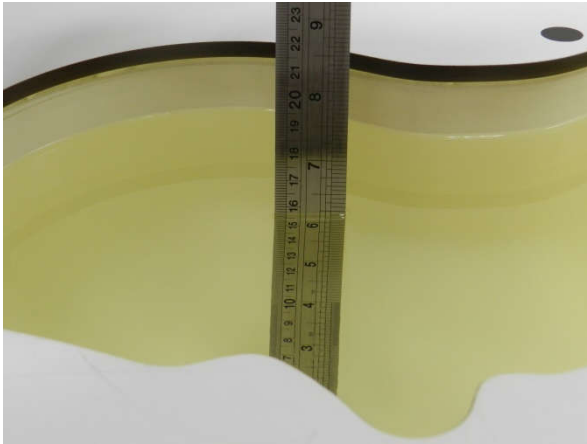


Fig 11.1 Photo of Liquid Height for Head SAR

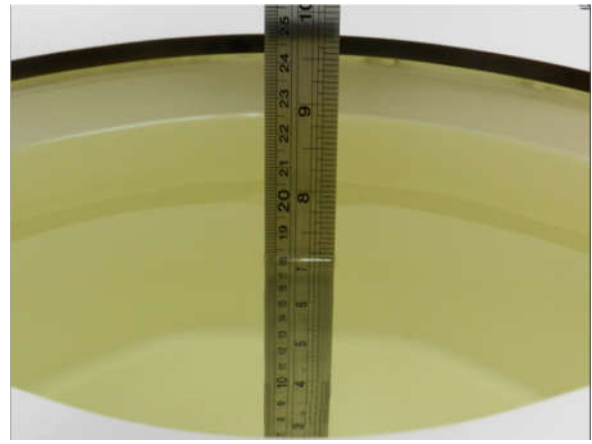


Fig 11.2 Photo of Liquid Height for Body SAR

11.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ε _r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε _r)	Conductivity Target (σ)	Permittivity Target (ε _r)	Delta (σ) (%)	Delta (ε _r) (%)	Limit (%)	Date
750	Head	22.6	0.902	42.022	0.89	41.90	1.35	0.29	±5	2019/4/3
835	Head	22.7	0.945	42.762	0.90	41.50	5.00	3.04	±5	2019/4/3
1750	Head	22.8	1.346	40.246	1.37	40.10	-1.75	0.36	±5	2019/4/5
1900	Head	22.6	1.373	39.730	1.40	40.00	-1.93	-0.68	±5	2019/4/7
2450	Head	22.7	1.845	38.195	1.80	39.20	2.50	-2.56	±5	2019/4/1
2600	Head	22.5	2.040	37.884	1.96	39.00	4.08	-2.86	±5	2019/3/28
5250	Head	22.7	4.844	36.985	4.71	35.90	2.85	3.02	±5	2019/4/8
5600	Head	22.7	5.212	36.458	5.07	35.50	2.80	2.70	±5	2019/4/8
5750	Head	22.7	5.377	36.232	5.22	35.40	3.01	2.35	±5	2019/4/8
750	Body	22.6	0.976	55.945	0.96	55.50	1.67	0.80	±5	2019/4/4
835	Body	22.5	1.004	54.614	0.97	55.20	3.51	-1.06	±5	2019/4/6
1750	Body	22.8	1.521	54.081	1.49	53.40	2.08	1.28	±5	2019/4/7
1900	Body	22.7	1.548	52.729	1.52	53.30	1.84	-1.07	±5	2019/4/7
2450	Body	22.7	2.027	53.032	1.95	52.70	3.95	0.63	±5	2019/4/6
2600	Body	22.7	2.170	52.182	2.16	52.50	0.46	-0.61	±5	2019/3/28
5250	Body	22.9	5.447	47.445	5.36	48.90	1.62	-2.98	±5	2019/4/8
5600	Body	22.9	5.957	46.930	5.77	48.50	3.24	-3.24	±5	2019/4/8
5750	Body	22.9	6.159	46.684	5.94	48.30	3.69	-3.35	±5	2019/4/8

11.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2019/4/3	750	Head	250	1087	3857	1210	2.13	8.36	8.52	1.91
2019/4/3	835	Head	250	4d151	3857	1210	2.36	9.30	9.44	1.51
2019/4/5	1750	Head	250	1090	3857	1210	9.72	36.40	38.88	6.81
2019/4/7	1900	Head	250	5d170	3279	1279	10.10	39.00	40.4	3.59
2019/4/1	2450	Head	250	908	3279	1279	13.10	52.80	52.4	-0.76
2019/3/28	2600	Head	250	1061	3857	1210	14.20	57.70	56.8	-1.56
2019/4/8	5250	Head	100	1006	3857	1210	8.29	80.70	82.9	2.73
2019/4/8	5600	Head	100	1006	3857	1210	8.40	83.30	84	0.84
2019/4/8	5750	Head	100	1006	3857	1210	8.17	80.40	81.7	1.62
2019/4/4	750	Body	250	1087	3857	1210	2.15	8.58	8.6	0.23
2019/4/6	835	Body	250	4d151	3857	1210	2.45	9.53	9.8	2.83
2019/4/7	1750	Body	250	1090	3857	1210	9.50	37.70	38	0.80
2019/4/7	1900	Body	250	5d170	3857	1210	10.30	40.00	41.2	3.00
2019/4/6	2450	Body	250	908	3857	1210	12.80	50.80	51.2	0.79
2019/3/28	2600	Body	250	1061	3857	1210	13.90	54.20	55.6	2.58
2019/4/8	5250	Body	100	1006	3857	1210	7.62	78.30	76.2	-2.68
2019/4/8	5600	Body	100	1006	3857	1210	7.97	81.00	79.7	-1.60
2019/4/8	5750	Body	100	1006	3857	1210	7.60	77.40	76	-1.81

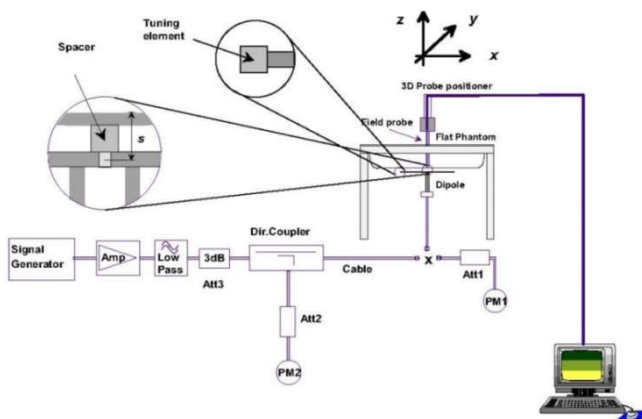


Fig 11.3.1 System Performance Check Setup



Fig 11.3.2 Setup Photo

12. RF Exposure Positions

12.1 Ear and handset reference point

Figure 12.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 12.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 12.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 12.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

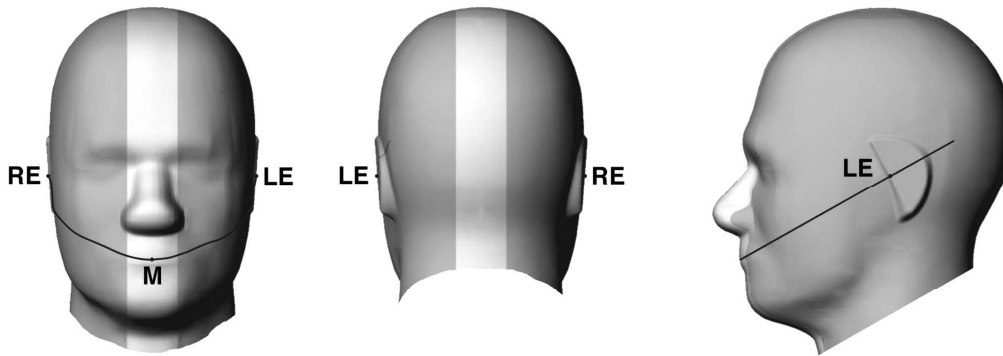


Fig 12.1.1 Front, back, and side views of SAM twin phantom

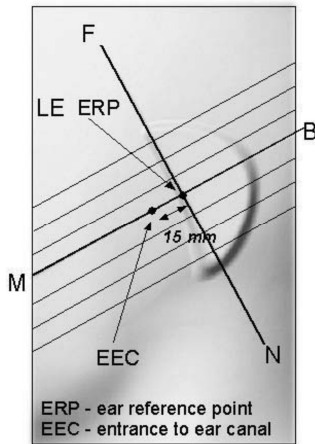


Fig 12.1.2 Close-up side view of phantom showing the ear region.

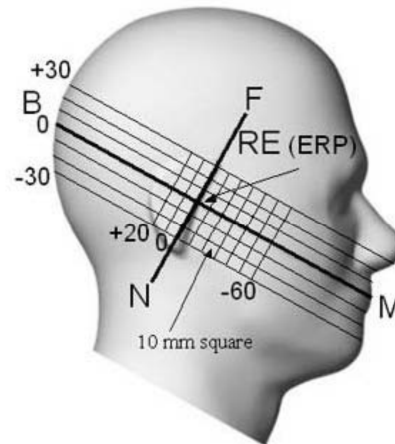


Fig 12.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

12.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 12.2.1 and Figure 12.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 12.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 12.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 12.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 12.2.3. The actual rotation angles should be documented in the test report.

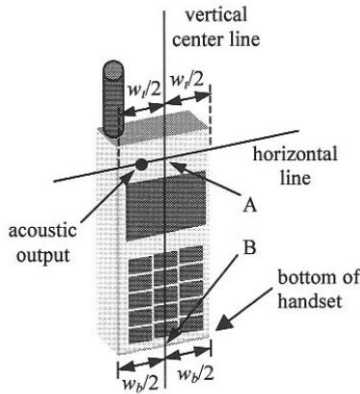


Fig 12.2.1 Handset vertical and horizontal reference lines—“fixed case”

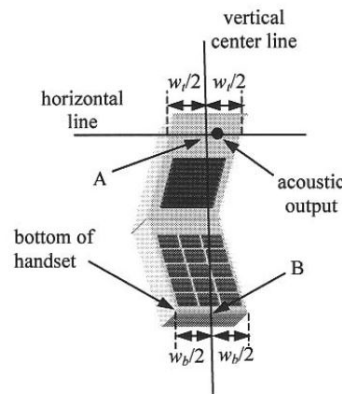


Fig 12.2.2 Handset vertical and horizontal reference lines—“clam-shell case”

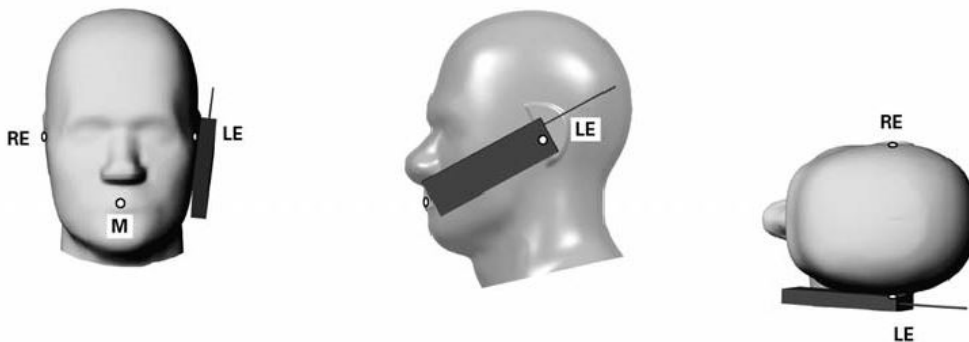


Fig 12.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

12.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 12.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

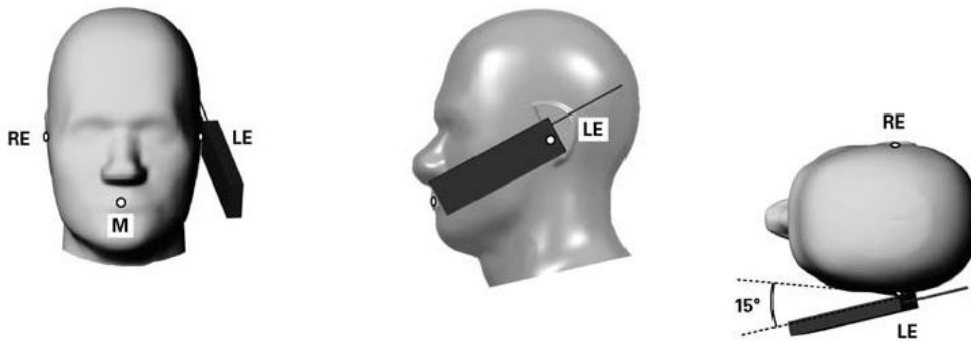


Fig 12.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

12.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

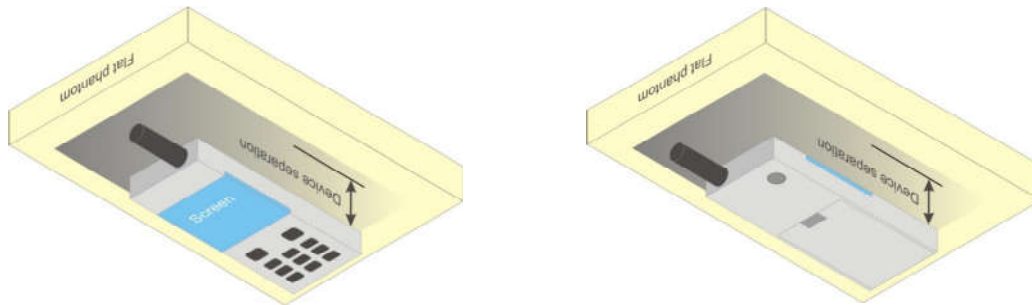


Fig 12.4 Body Worn Position

12.5 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets (L x W ≥ 9 cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The “Portable Hotspot” feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

13. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

- Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
- Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS 4Tx slots for GSM850/GSM1900 are considered as the primary mode.
- Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.
- Power reduction which is triggered by hotspot mode/p-sensor on are implemented in GSM1900 band, for SAR testing EUT was set in reduced power mode and GPRS 4 Tx slots due to its highest frame-average power.

<Full Power Mode>

GSM850 Tx Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	31.95	32.18	32.19	33.50	22.95	23.18	23.19	24.50
GPRS 1 Tx slot	31.93	32.16	32.18	33.50	22.93	23.16	23.18	24.50
GPRS 2 Tx slots	29.40	29.33	29.66	30.50	23.40	23.33	23.66	24.50
GPRS 3 Tx slots	27.40	27.37	27.65	28.75	23.14	23.11	23.39	24.49
GPRS 4 Tx slots	25.87	25.90	26.20	27.50	22.87	22.90	23.20	24.50
EDGE 1 Tx slot	26.03	26.05	26.22	28.00	17.03	17.05	17.22	19.00
EDGE 2 Tx slots	26.09	26.08	26.07	28.00	20.09	20.08	20.07	22.00
EDGE 3 Tx slots	24.51	24.40	24.70	26.25	20.25	20.14	20.44	21.99
EDGE 4 Tx slots	23.06	23.01	23.30	25.00	20.06	20.01	20.30	22.00

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

- Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
- Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
- Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
- Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

GSM1900 Tx Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	29.45	29.07	29.05	30.50	20.45	20.07	20.05	21.50
GPRS 1 Tx slot	29.43	29.05	29.03	30.50	20.43	20.05	20.03	21.50
GPRS 2 Tx slots	27.09	26.73	26.78	27.50	21.09	20.73	20.78	21.50
GPRS 3 Tx slots	25.34	24.98	25.02	25.75	21.08	20.72	20.76	21.49
GPRS 4 Tx slots	23.87	23.61	23.62	24.50	20.87	20.61	20.62	21.50
EDGE 1 Tx slot	25.58	25.25	25.33	27.00	16.58	16.25	16.33	18.00
EDGE 2 Tx slots	25.51	25.13	25.24	27.00	19.51	19.13	19.24	21.00
EDGE 3 Tx slots	24.18	23.81	23.91	25.25	19.92	19.55	19.65	20.99
EDGE 4 Tx slots	22.65	22.51	22.53	24.00	19.65	19.51	19.53	21.00

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

- Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
- Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
- Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
- Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<Reduced Power Mode for P-Sensor/Hotspot On>

GSM1900 Tx Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	28.66	28.25	28.48	29.50	19.66	19.25	19.48	20.50
GPRS 1 Tx slot	28.68	28.27	28.50	29.50	19.68	19.27	19.50	20.50
GPRS 2 Tx slots	25.95	25.62	25.75	26.50	19.95	19.62	19.75	20.50
GPRS 3 Tx slots	24.03	23.71	23.97	24.75	19.77	19.45	19.71	20.49
GPRS 4 Tx slots	22.61	22.32	22.41	23.50	19.61	19.32	19.41	20.50
EDGE 1 Tx slot	25.66	25.35	25.47	26.00	16.66	16.35	16.47	17.00
EDGE 2 Tx slots	24.84	24.81	24.78	26.00	18.84	18.81	18.78	20.00
EDGE 3 Tx slots	23.00	22.82	22.95	24.25	18.74	18.56	18.69	19.99
EDGE 4 Tx slots	21.58	21.48	21.45	23.00	18.58	18.48	18.45	20.00

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

- Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
- Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
- Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
- Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_d/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CGI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CGI} = 5/15$ with $\beta_{HS} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS- DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

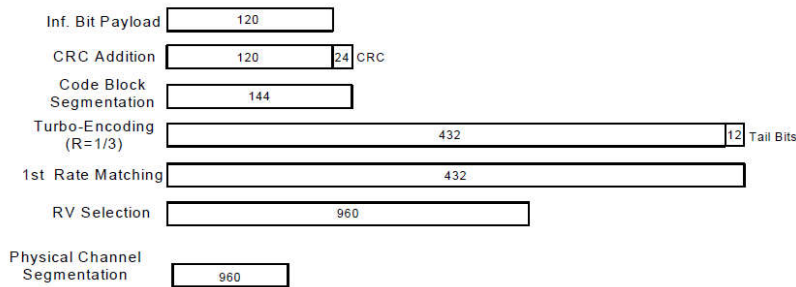


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

Setup Configuration



<WCDMA Conducted Power>

General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

<Full Power Mode>

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band IV			Tune-up Limit (dBm)	WCDMA Band V			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6	1712.4	1732.6	1752.6	826.4	836.4	846.6			
3GPP Rel 99	AMR 12.2Kbps	22.36	22.34	22.21	24.00	22.17	22.23	22.40	24.00	22.76	22.68	22.70	24.00
3GPP Rel 99	RMC 12.2Kbps	22.39	22.35	22.25	24.00	22.18	22.25	22.42	24.00	22.80	22.70	22.73	24.00
3GPP Rel 6	HSDPA Subtest-1	21.94	21.92	21.83	23.00	21.64	21.71	21.92	23.00	22.27	22.16	22.13	23.00
3GPP Rel 6	HSDPA Subtest-2	21.98	21.94	21.84	23.00	21.66	21.74	21.94	23.00	22.26	22.19	22.15	23.00
3GPP Rel 6	HSDPA Subtest-3	21.49	21.45	21.37	22.50	21.12	21.24	21.46	22.50	21.75	21.69	21.66	22.50
3GPP Rel 6	HSDPA Subtest-4	21.46	21.42	21.34	22.50	21.16	21.24	21.47	22.50	21.78	21.66	21.64	22.50
3GPP Rel 8	DC-HSDPA Subtest-1	21.88	21.88	21.82	23.00	21.61	21.61	21.88	23.00	22.17	22.16	22.12	23.00
3GPP Rel 8	DC-HSDPA Subtest-2	21.91	21.89	21.85	23.00	21.67	21.71	21.78	23.00	22.21	22.21	22.01	23.00
3GPP Rel 8	DC-HSDPA Subtest-3	21.45	21.41	21.35	22.50	21.08	21.28	21.35	22.50	21.71	21.62	21.67	22.50
3GPP Rel 8	DC-HSDPA Subtest-4	21.44	21.43	21.28	22.50	21.15	21.30	21.41	22.50	21.75	21.61	21.61	22.50
3GPP Rel 6	HSUPA Subtest-1	21.98	21.92	21.83	23.00	21.81	21.85	21.86	23.00	22.28	22.17	22.15	23.00
3GPP Rel 6	HSUPA Subtest-2	19.94	19.95	19.83	21.00	19.82	19.85	19.83	21.00	20.24	20.14	20.11	21.00
3GPP Rel 6	HSUPA Subtest-3	20.96	20.93	20.83	22.00	20.81	20.85	20.83	22.00	21.26	21.14	21.12	22.00
3GPP Rel 6	HSUPA Subtest-4	19.97	19.91	19.80	21.00	19.81	19.87	19.86	21.00	20.26	20.20	20.19	21.00
3GPP Rel 6	HSUPA Subtest-5	22.00	22.00	21.80	23.00	21.80	21.90	21.90	23.00	22.20	22.20	22.10	23.00



<Reduced Power Mode for P-Sensor On>

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band IV			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538		1312	1413	1513	
Rx Channel		9662	9800	9938		1537	1638	1738	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6	
3GPP Rel 99	AMR 12.2Kbps	18.64	18.61	18.62	19.00	15.52	15.50	15.60	16.00
3GPP Rel 99	RMC 12.2Kbps	18.66	18.63	18.64	19.00	15.54	15.51	15.62	16.00
3GPP Rel 6	HSDPA Subtest-1	17.67	17.58	17.64	18.00	14.65	14.64	14.82	15.00
3GPP Rel 6	HSDPA Subtest-2	17.69	17.61	17.60	18.00	14.60	14.62	14.78	15.00
3GPP Rel 6	HSDPA Subtest-3	17.17	17.11	17.10	17.50	14.13	14.14	14.29	14.50
3GPP Rel 6	HSDPA Subtest-4	17.18	17.10	17.08	17.50	14.13	14.12	14.32	14.50
3GPP Rel 8	DC-HSDPA Subtest-1	17.61	17.55	17.62	18.00	14.61	14.61	14.78	15.00
3GPP Rel 8	DC-HSDPA Subtest-2	17.53	17.58	17.58	18.00	14.58	14.65	14.75	15.00
3GPP Rel 8	DC-HSDPA Subtest-3	17.12	17.05	17.09	17.50	14.12	14.21	14.21	14.50
3GPP Rel 8	DC-HSDPA Subtest-4	17.18	17.01	17.01	17.50	14.13	14.08	14.01	14.50
3GPP Rel 6	HSUPA Subtest-1	17.65	17.61	17.53	18.00	14.62	14.60	14.75	15.00
3GPP Rel 6	HSUPA Subtest-2	15.64	15.61	15.65	16.00	12.65	12.61	12.80	13.00
3GPP Rel 6	HSUPA Subtest-3	16.66	16.61	16.62	17.00	13.69	13.65	13.82	14.00
3GPP Rel 6	HSUPA Subtest-4	15.66	15.53	15.64	16.00	12.65	12.60	12.79	13.00
3GPP Rel 6	HSUPA Subtest-5	17.70	17.60	17.60	18.00	14.66	14.63	14.80	15.00

<Reduced Power Mode for Hotspot On>

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band IV			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538		1312	1413	1513	
Rx Channel		9662	9800	9938		1537	1638	1738	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6	
3GPP Rel 99	AMR 12.2Kbps	18.64	18.61	18.62	19.00	14.48	14.46	14.63	15.50
3GPP Rel 99	RMC 12.2Kbps	18.66	18.63	18.64	19.00	14.50	14.47	14.66	15.50
3GPP Rel 6	HSDPA Subtest-1	17.67	17.58	17.64	18.00	13.65	13.65	13.77	14.50
3GPP Rel 6	HSDPA Subtest-2	17.69	17.61	17.60	18.00	13.64	13.64	13.79	14.50
3GPP Rel 6	HSDPA Subtest-3	17.17	17.11	17.10	17.50	13.18	13.12	13.33	14.00
3GPP Rel 6	HSDPA Subtest-4	17.18	17.10	17.08	17.50	13.18	13.11	13.30	14.00
3GPP Rel 8	DC-HSDPA Subtest-1	17.61	17.55	17.62	18.00	13.68	13.52	13.68	14.50
3GPP Rel 8	DC-HSDPA Subtest-2	17.53	17.58	17.58	18.00	13.61	13.58	13.65	14.50
3GPP Rel 8	DC-HSDPA Subtest-3	17.12	17.05	17.09	17.50	13.08	13.11	13.32	14.00
3GPP Rel 8	DC-HSDPA Subtest-4	17.18	17.01	17.01	17.50	13.15	13.01	13.28	14.00
3GPP Rel 6	HSUPA Subtest-1	17.65	17.61	17.53	18.00	13.55	13.63	13.79	14.50
3GPP Rel 6	HSUPA Subtest-2	15.64	15.61	15.65	16.00	11.67	11.64	11.80	12.50
3GPP Rel 6	HSUPA Subtest-3	16.66	16.61	16.62	17.00	12.67	12.64	12.81	13.50
3GPP Rel 6	HSUPA Subtest-4	15.66	15.53	15.64	16.00	11.67	11.62	11.81	12.50
3GPP Rel 6	HSUPA Subtest-5	17.70	17.60	17.60	18.00	13.70	13.70	13.80	14.50



<CDMA2000 Conducted Power>

General Note:

1. Per KDB 941225 D01v03r01, SAR for head exposure is measured in RC3 with the handset configured to transmit at full rate in SO55.
2. Per KDB 941225 D01v03r01, in Hotspot mode EUT is treated as data device and SAR is tested with Ev-Do Rev 0 (RTAP 153.6kbps) as the primary mode.
3. Per KDB 941225 D01v03r01, for Body-worn accessory SAR is measured in RC3 with the handset configured in TDSO/SO32 to transmit at full rate on FCH only with all other code channels disabled. The body-worn accessory procedures in KDB Publication 447498 are applied. The 3G SAR test reduction procedure is applied to the multiple code channel configuration (FCH+SCH), with FCH only as the primary mode.

<Full Power Mode>

Band	CDMA2000 BC0			Tune-up Limit (dBm)	CDMA2000 BC1			Tune-up Limit (dBm)	CDMA2000 BC10			Tune-up Limit (dBm)
	TX Channel	1013	384		777	25	600		1175	476	580	
Frequency (MHz)	824.7	836.52	848.31		1851.25	1880	1908.75		817.9	820.5	823.1	
RC1 SO55	24.53	24.51	24.51	25.00	24.71	24.63	24.45	25.00	24.38	24.48	24.55	25.00
RC3 SO55	24.54	24.57	24.52	25.00	24.73	24.74	24.54	25.00	24.41	24.60	24.54	25.00
RC3 SO32 (F+SCH)	24.51	24.56	24.51	25.00	24.63	24.65	24.45	25.00	24.38	24.55	24.54	25.00
RC3 SO32 (+SCH)	24.52	24.45	24.54	25.00	24.73	24.63	24.36	25.00	24.38	24.51	24.55	25.00
RTAP 153.6Kbps	24.44	24.48	24.46	25.00	24.66	24.67	24.34	25.00	24.38	24.59	24.58	25.00
RETAP 4096Bits	24.34	24.30	24.34	25.00	24.64	24.42	24.65	25.00	24.20	24.30	24.49	25.00


<Reduced Power Mode for P-Sensor/Hotspot On>

Band	CDMA2000 BC1			Tune-up Limit (dBm)	
	TX Channel	25	600		1175
Frequency (MHz)		1851.25	1880	1908.75	
RC1 SO55		18.81	18.73	18.95	19.50
RC3 SO55		18.82	18.95	18.87	19.50
RC3 SO32 (F+SCH)		18.90	18.96	18.95	19.50
RC3 SO32 (+SCH)		18.90	18.91	18.93	19.50
RTAP 153.6Kbps		18.99	19.09	19.06	19.50
RETAP 4096Bits		18.89	19.06	19.01	19.50

<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4 / B5 / B12 / B26 / B71 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE band 2 / 5 / 4 SAR test was covered by Band 25 / 26 / 66; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
10. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.

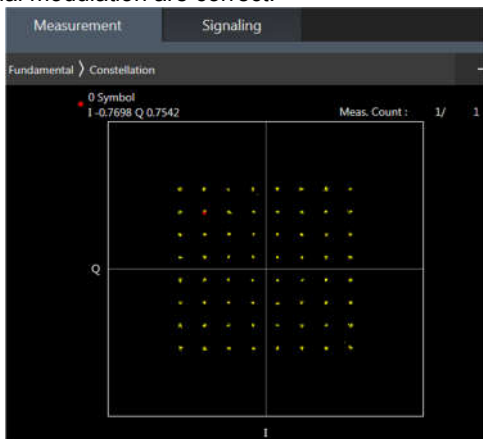

64QAM



16QAM



<Full Power Mode>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	22.87	22.97	22.79	24	0
20	QPSK	1	49	22.70	22.76	22.84		
20	QPSK	1	99	22.95	23.17	23.09		
20	QPSK	50	0	21.89	21.95	21.97	23	1
20	QPSK	50	24	21.81	21.82	21.89		
20	QPSK	50	50	21.87	21.95	21.92		
20	QPSK	100	0	21.91	21.99	21.97	23	1
20	16QAM	1	0	22.42	22.43	22.50		
20	16QAM	1	49	22.10	22.20	22.33		
20	16QAM	1	99	22.19	22.48	22.33	22	2
20	16QAM	50	0	20.90	20.91	20.93		
20	16QAM	50	24	20.83	20.83	20.90		
20	16QAM	50	50	20.90	20.94	20.93	22	2
20	16QAM	100	0	20.91	20.93	20.99		
20	64QAM	1	0	21.29	21.31	21.34		
20	64QAM	1	49	20.92	20.95	21.02	22	2
20	64QAM	1	99	21.08	21.36	21.29		
20	64QAM	50	0	19.89	19.90	19.94		
20	64QAM	50	24	19.82	19.81	19.90	21	3
20	64QAM	50	50	19.82	19.93	19.91		
20	64QAM	100	0	19.91	19.93	19.99		



Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	22.48	22.65	22.45	24	0
15	QPSK	1	37	22.83	22.78	22.73		
15	QPSK	1	74	22.24	22.24	22.65		
15	QPSK	36	0	22.06	21.94	22.01	23	1
15	QPSK	36	20	21.97	21.82	21.89		
15	QPSK	36	39	21.94	21.82	21.85		
15	QPSK	75	0	21.98	21.90	21.96	23	1
15	16QAM	1	0	22.55	22.50	22.52		
15	16QAM	1	37	22.16	22.17	22.22		
15	16QAM	1	74	22.49	22.61	22.50	22	2
15	16QAM	36	0	21.05	20.92	21.03		
15	16QAM	36	20	20.94	20.84	20.91		
15	16QAM	36	39	20.96	20.82	20.83	22	2
15	16QAM	75	0	21.00	20.88	20.95		
15	64QAM	1	0	21.44	21.37	21.39		
15	64QAM	1	37	21.05	21.02	21.07	22	2
15	64QAM	1	74	21.42	21.49	21.36		
15	64QAM	36	0	20.00	19.92	19.02		
15	64QAM	36	20	19.93	19.80	19.91	21	3
15	64QAM	36	39	19.86	19.82	19.82		
15	64QAM	75	0	19.96	19.90	19.94		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	22.87	22.63	22.87	24	0
10	QPSK	1	25	22.90	22.80	22.83		
10	QPSK	1	49	23.10	23.16	23.15		
10	QPSK	25	0	22.07	21.96	21.96	23	1
10	QPSK	25	12	21.98	21.92	21.94		
10	QPSK	25	25	21.98	21.96	21.94		
10	QPSK	50	0	22.00	21.90	21.92	23	1
10	16QAM	1	0	22.56	22.46	22.50		
10	16QAM	1	25	22.21	22.21	22.13		
10	16QAM	1	49	22.48	22.50	22.37	22	2
10	16QAM	25	0	21.02	20.92	20.94		
10	16QAM	25	12	20.97	20.89	20.90		
10	16QAM	25	25	20.98	20.92	20.96	22	2
10	16QAM	50	0	21.01	20.96	20.93		
10	64QAM	1	0	21.38	21.29	21.28		
10	64QAM	1	25	21.11	21.05	21.02	22	2
10	64QAM	1	49	21.38	21.35	21.32		
10	64QAM	25	0	19.65	19.93	19.93		
10	64QAM	25	12	19.97	19.90	19.90	21	3
10	64QAM	25	25	20.00	19.98	19.95		
10	64QAM	50	0	20.00	19.90	19.90		



Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	22.81	22.79	22.83	24	0
5	QPSK	1	12	22.80	22.77	22.78		
5	QPSK	1	24	22.87	22.82	22.81		
5	QPSK	12	0	22.04	21.93	21.94	23	1
5	QPSK	12	7	21.92	21.83	21.85		
5	QPSK	12	13	21.86	21.79	21.82		
5	QPSK	25	0	21.98	21.86	21.87	23	1
5	16QAM	1	0	22.31	22.20	22.19		
5	16QAM	1	12	22.18	22.10	22.09		
5	16QAM	1	24	22.16	22.15	22.16	22	2
5	16QAM	12	0	21.01	20.95	21.01		
5	16QAM	12	7	20.95	20.85	20.92		
5	16QAM	12	13	20.94	20.82	20.88	21	3
5	16QAM	25	0	20.86	20.85	20.87		
5	64QAM	1	0	21.37	21.31	21.27		
5	64QAM	1	12	21.22	21.18	21.19	22	2
5	64QAM	1	24	21.20	21.22	21.15		
5	64QAM	12	0	20.17	20.14	20.20		
5	64QAM	12	7	20.14	20.03	20.05	21	3
5	64QAM	12	13	20.12	20.02	20.07		
5	64QAM	25	0	20.13	20.04	20.07		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	22.84	22.78	22.73	24	0
3	QPSK	1	8	22.90	22.77	22.77		
3	QPSK	1	14	22.86	22.81	22.75		
3	QPSK	8	0	21.93	21.86	21.82	23	1
3	QPSK	8	4	21.89	21.80	21.85		
3	QPSK	8	7	21.85	21.74	21.78		
3	QPSK	15	0	21.91	21.87	21.83	23	1
3	16QAM	1	0	22.18	22.02	22.12		
3	16QAM	1	8	22.17	22.07	22.09		
3	16QAM	1	14	22.17	22.13	22.09	22	2
3	16QAM	8	0	21.04	20.90	20.94		
3	16QAM	8	4	21.01	20.94	20.90		
3	16QAM	8	7	20.98	20.88	20.86	22	2
3	16QAM	15	0	20.91	20.86	20.80		
3	64QAM	1	0	21.20	21.20	21.19		
3	64QAM	1	8	21.20	21.15	21.20	21	3
3	64QAM	1	14	21.20	21.17	21.12		
3	64QAM	8	0	20.13	20.07	20.01		
3	64QAM	8	4	20.11	20.01	20.02	21	3
3	64QAM	8	7	20.05	19.96	20.03		
3	64QAM	15	0	20.11	20.05	20.00		



Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	22.60	22.52	22.62	24	0
1.4	QPSK	1	3	22.81	22.68	22.74		
1.4	QPSK	1	5	22.72	22.66	22.66		
1.4	QPSK	3	0	22.85	22.71	22.73		
1.4	QPSK	3	1	22.84	22.74	22.73		
1.4	QPSK	3	3	22.79	22.69	22.71		
1.4	QPSK	6	0	21.83	21.73	21.77	23	1
1.4	16QAM	1	0	22.09	21.94	22.06	23	1
1.4	16QAM	1	3	22.17	22.02	22.11		
1.4	16QAM	1	5	22.09	21.92	22.08		
1.4	16QAM	3	0	21.84	21.83	21.75		
1.4	16QAM	3	1	21.92	21.86	21.85		
1.4	16QAM	3	3	21.86	21.78	21.76		
1.4	16QAM	6	0	20.88	20.80	20.76	22	2
1.4	64QAM	1	0	21.15	21.10	21.07	22	2
1.4	64QAM	1	3	21.16	21.17	21.12		
1.4	64QAM	1	5	21.11	21.10	21.05		
1.4	64QAM	3	0	21.08	21.00	20.95		
1.4	64QAM	3	1	21.17	21.08	21.01		
1.4	64QAM	3	3	21.08	20.98	20.97		
1.4	64QAM	6	0	20.08	19.93	19.91	21	3



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	22.65	22.73	22.74	24	0
20	QPSK	1	49	22.67	22.88	22.77		
20	QPSK	1	99	22.71	22.77	23.15		
20	QPSK	50	0	21.69	21.97	21.89	23	1
20	QPSK	50	24	21.66	21.82	21.85		
20	QPSK	50	50	21.63	21.79	21.73		
20	QPSK	100	0	21.68	21.90	21.88		
20	16QAM	1	0	21.94	22.23	21.97	23	1
20	16QAM	1	49	22.15	22.03	22.00		
20	16QAM	1	99	22.03	21.97	22.06		
20	16QAM	50	0	20.72	20.95	20.96	22	2
20	16QAM	50	24	20.73	20.88	20.90		
20	16QAM	50	50	20.71	20.91	20.77		
20	16QAM	100	0	20.66	20.91	20.81		
20	64QAM	1	0	21.04	21.03	20.89	22	2
20	64QAM	1	49	21.49	20.78	20.87		
20	64QAM	1	99	20.97	20.92	20.93		
20	64QAM	50	0	19.66	19.93	19.90	21	3
20	64QAM	50	24	19.71	19.88	19.83		
20	64QAM	50	50	19.61	19.83	19.76		
20	64QAM	100	0	19.69	19.94	19.81		



Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	22.84	22.87	22.74	24	0
15	QPSK	1	37	22.78	22.81	22.82		
15	QPSK	1	74	22.69	22.82	22.75		
15	QPSK	36	0	21.78	21.95	21.86	23	1
15	QPSK	36	20	21.80	21.88	21.87		
15	QPSK	36	39	21.65	21.89	21.81		
15	QPSK	75	0	21.70	21.86	21.88	23	1
15	16QAM	1	0	22.04	22.34	22.06		
15	16QAM	1	37	21.98	21.91	21.97		
15	16QAM	1	74	22.12	22.00	22.07	22	2
15	16QAM	36	0	20.81	20.97	20.87		
15	16QAM	36	20	20.80	20.90	20.87		
15	16QAM	36	39	20.72	20.92	20.78	22	2
15	16QAM	75	0	20.65	20.92	20.87		
15	64QAM	1	0	20.90	21.13	21.00		
15	64QAM	1	37	21.00	21.03	20.84	22	2
15	64QAM	1	74	20.95	20.90	20.89		
15	64QAM	36	0	19.81	19.98	19.84		
15	64QAM	36	20	19.82	19.85	19.84	21	3
15	64QAM	36	39	19.69	19.86	19.77		
15	64QAM	75	0	19.64	19.94	19.87		
Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	22.78	22.74	22.87	24	0
10	QPSK	1	25	22.79	22.98	23.02		
10	QPSK	1	49	23.12	23.12	23.14		
10	QPSK	25	0	21.94	21.94	22.03	23	1
10	QPSK	25	12	21.88	21.88	21.95		
10	QPSK	25	25	21.96	22.06	22.10		
10	QPSK	50	0	21.92	21.91	22.08	23	1
10	16QAM	1	0	22.32	22.49	22.46		
10	16QAM	1	25	22.20	22.12	22.20		
10	16QAM	1	49	22.46	22.50	22.47	23	1
10	16QAM	25	0	20.91	20.91	21.02		
10	16QAM	25	12	20.82	20.88	20.91		
10	16QAM	25	25	20.93	21.02	20.99	22	2
10	16QAM	50	0	20.97	21.00	21.07		
10	64QAM	1	0	21.18	21.27	21.34		
10	64QAM	1	25	21.05	20.97	21.15	22	2
10	64QAM	1	49	21.47	21.45	21.46		
10	64QAM	25	0	19.93	20.01	20.03		
10	64QAM	25	12	19.86	19.89	19.92	21	3
10	64QAM	25	25	20.00	20.11	20.06		
10	64QAM	50	0	19.94	19.94	20.03		



Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	22.19	22.82	22.93	24	0
5	QPSK	1	12	22.69	22.80	22.81		
5	QPSK	1	24	22.71	22.95	22.91		
5	QPSK	12	0	21.85	21.90	21.97	23	1
5	QPSK	12	7	21.80	21.85	21.88		
5	QPSK	12	13	21.76	21.84	21.87		
5	QPSK	25	0	21.82	21.87	21.93	23	1
5	16QAM	1	0	22.18	22.30	22.38		
5	16QAM	1	12	21.97	21.98	22.03		
5	16QAM	1	24	22.10	22.20	22.17	22	2
5	16QAM	12	0	20.88	20.92	20.95		
5	16QAM	12	7	20.89	20.93	20.94		
5	16QAM	12	13	20.81	20.91	20.95	22	2
5	16QAM	25	0	20.80	20.85	20.87		
5	64QAM	1	0	21.04	21.12	21.26		
5	64QAM	1	12	20.88	20.84	21.00	22	2
5	64QAM	1	24	20.97	21.03	21.09		
5	64QAM	12	0	19.87	19.87	19.94		
5	64QAM	12	7	19.80	19.86	19.91	21	3
5	64QAM	12	13	19.80	19.84	19.89		
5	64QAM	25	0	19.85	19.87	19.87		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	22.70	22.60	22.76	24	0
3	QPSK	1	8	22.72	22.78	22.80		
3	QPSK	1	14	22.66	22.74	22.83		
3	QPSK	8	0	21.72	21.81	21.94	23	1
3	QPSK	8	4	21.80	21.78	21.91		
3	QPSK	8	7	21.64	21.79	21.78		
3	QPSK	15	0	21.72	21.79	21.86	23	1
3	16QAM	1	0	22.02	22.12	22.21		
3	16QAM	1	8	22.06	22.18	22.19		
3	16QAM	1	14	22.01	22.20	22.08	22	2
3	16QAM	8	0	20.74	20.93	21.01		
3	16QAM	8	4	20.80	20.89	20.98		
3	16QAM	8	7	20.69	20.87	20.87	22	2
3	16QAM	15	0	20.74	20.85	20.92		
3	64QAM	1	0	20.95	20.93	21.04		
3	64QAM	1	8	21.00	20.92	20.99	22	2
3	64QAM	1	14	20.94	20.88	20.98		
3	64QAM	8	0	19.68	19.91	19.97		
3	64QAM	8	4	19.73	19.84	19.93	21	3
3	64QAM	8	7	19.70	19.84	19.82		
3	64QAM	15	0	19.75	19.83	19.88		



Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	22.63	22.47	22.44	24	0
1.4	QPSK	1	3	22.59	22.80	22.83		
1.4	QPSK	1	5	22.61	22.73	22.75		
1.4	QPSK	3	0	22.72	22.76	22.81		
1.4	QPSK	3	1	22.65	22.79	22.95		
1.4	QPSK	3	3	22.60	22.76	22.82		
1.4	QPSK	6	0	21.58	21.75	21.91	23	1
1.4	16QAM	1	0	21.98	22.24	22.06	23	1
1.4	16QAM	1	3	21.93	22.18	22.17		
1.4	16QAM	1	5	21.92	22.18	22.12		
1.4	16QAM	3	0	21.75	21.84	21.89		
1.4	16QAM	3	1	21.68	21.84	22.02		
1.4	16QAM	3	3	21.61	21.76	21.88		
1.4	16QAM	6	0	20.71	20.86	20.96	22	2
1.4	64QAM	1	0	20.81	20.88	21.01	22	2
1.4	64QAM	1	3	20.75	20.90	21.01		
1.4	64QAM	1	5	20.77	20.79	20.99		
1.4	64QAM	3	0	20.78	20.86	20.88		
1.4	64QAM	3	1	20.77	20.91	21.02		
1.4	64QAM	3	3	20.68	20.77	20.88		
1.4	64QAM	6	0	19.67	19.80	19.95	21	3



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	22.93	23.01	22.81	24	0
10	QPSK	1	25	22.84	22.77	22.67		
10	QPSK	1	49	23.18	23.05	23.14		
10	QPSK	25	0	21.92	21.91	21.86	23	1
10	QPSK	25	12	21.80	21.85	21.83		
10	QPSK	25	25	21.96	21.88	21.86		
10	QPSK	50	0	21.99	21.92	21.87		
10	16QAM	1	0	22.36	22.36	22.24	23	1
10	16QAM	1	25	22.16	22.10	22.14		
10	16QAM	1	49	22.49	22.42	22.32		
10	16QAM	25	0	20.97	20.91	20.87	22	2
10	16QAM	25	12	20.86	20.87	20.79		
10	16QAM	25	25	21.04	20.89	20.85		
10	16QAM	50	0	20.95	20.90	20.91		
10	64QAM	1	0	21.37	21.16	21.08	22	2
10	64QAM	1	25	21.14	21.00	20.99		
10	64QAM	1	49	21.49	21.34	21.28		
10	64QAM	25	0	19.97	19.82	19.89	21	3
10	64QAM	25	12	19.86	19.76	19.85		
10	64QAM	25	25	19.99	19.81	19.92		
10	64QAM	50	0	19.97	19.80	19.86		



Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	22.69	22.61	22.47	24	0
5	QPSK	1	12	22.86	22.61	22.62		
5	QPSK	1	24	22.83	22.61	22.70		
5	QPSK	12	0	21.82	21.76	21.76	23	1
5	QPSK	12	7	21.85	21.69	21.73		
5	QPSK	12	13	21.81	21.67	21.74		
5	QPSK	25	0	21.91	21.70	21.76	23	1
5	16QAM	1	0	22.14	21.98	21.94		
5	16QAM	1	12	22.12	21.84	21.97		
5	16QAM	1	24	22.12	21.84	21.93	22	2
5	16QAM	12	0	20.82	20.71	20.83		
5	16QAM	12	7	20.86	20.69	20.79		
5	16QAM	12	13	20.82	20.68	20.77	22	2
5	16QAM	25	0	20.84	20.68	20.71		
5	64QAM	1	0	21.37	21.16	21.08		
5	64QAM	1	12	21.14	21.00	20.99	22	2
5	64QAM	1	24	21.49	21.34	21.28		
5	64QAM	12	0	19.97	19.82	19.89		
5	64QAM	12	7	19.86	19.76	19.85	21	3
5	64QAM	12	13	19.99	19.81	19.92		
5	64QAM	25	0	19.97	19.80	19.86		
Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	22.58	22.43	22.46	24	0
3	QPSK	1	8	22.80	22.58	22.63		
3	QPSK	1	14	22.68	22.49	22.60		
3	QPSK	8	0	21.78	21.61	21.67	23	1
3	QPSK	8	4	21.86	21.60	21.69		
3	QPSK	8	7	21.81	21.56	21.71		
3	QPSK	15	0	21.86	21.58	21.64	23	1
3	16QAM	1	0	22.00	21.88	21.95		
3	16QAM	1	8	22.10	21.90	22.05		
3	16QAM	1	14	22.01	21.70	21.99	22	2
3	16QAM	8	0	20.80	20.71	20.77		
3	16QAM	8	4	20.93	20.71	20.75		
3	16QAM	8	7	20.85	20.67	20.74	22	2
3	16QAM	15	0	20.87	20.65	20.72		
3	64QAM	1	0	20.95	20.76	20.83		
3	64QAM	1	8	20.97	20.75	20.85	22	2
3	64QAM	1	14	20.89	20.67	20.84		
3	64QAM	8	0	19.79	19.64	19.65		
3	64QAM	8	4	19.84	19.62	19.72	21	3
3	64QAM	8	7	19.85	19.61	19.71		
3	64QAM	15	0	19.81	19.62	19.71		



Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	22.69	22.24	22.38	24	0
1.4	QPSK	1	3	22.73	22.51	22.64		
1.4	QPSK	1	5	22.64	22.49	22.55		
1.4	QPSK	3	0	22.76	22.56	22.57		
1.4	QPSK	3	1	22.77	22.58	22.62		
1.4	QPSK	3	3	22.73	22.52	22.59		
1.4	QPSK	6	0	21.74	21.58	21.70	23	1
1.4	16QAM	1	0	21.98	21.83	21.97	23	1
1.4	16QAM	1	3	22.01	21.84	22.10		
1.4	16QAM	1	5	21.99	21.76	22.01		
1.4	16QAM	3	0	21.77	21.64	21.70		
1.4	16QAM	3	1	21.81	21.69	21.79		
1.4	16QAM	3	3	21.72	21.60	21.72		
1.4	16QAM	6	0	20.82	20.63	20.66	22	2
1.4	64QAM	1	0	21.06	20.69	20.81	22	2
1.4	64QAM	1	3	21.05	20.69	20.84		
1.4	64QAM	1	5	20.96	20.67	20.75		
1.4	64QAM	3	0	20.89	20.62	20.67		
1.4	64QAM	3	1	20.86	20.67	20.72		
1.4	64QAM	3	3	20.84	20.60	20.64		
1.4	64QAM	6	0	19.79	19.61	19.58	21	3



<LTE Band 12>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130		
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	22.87	22.89	22.97	24	0
10	QPSK	1	25	22.94	22.95	22.97		
10	QPSK	1	49	23.15	23.13	23.19		
10	QPSK	25	0	21.88	21.97	21.96	23	1
10	QPSK	25	12	21.96	21.91	21.94		
10	QPSK	25	25	21.95	21.93	21.87		
10	QPSK	50	0	21.85	21.90	21.78		
10	16QAM	1	0	22.37	22.33	22.41	23	1
10	16QAM	1	25	22.17	22.11	22.14		
10	16QAM	1	49	22.37	22.29	22.19		
10	16QAM	25	0	20.83	20.91	20.96	22	2
10	16QAM	25	12	20.93	20.90	20.93		
10	16QAM	25	25	20.91	20.88	20.84		
10	16QAM	50	0	20.88	20.93	20.87		
10	64QAM	1	0	21.27	21.20	21.32	22	2
10	64QAM	1	25	21.03	20.98	21.03		
10	64QAM	1	49	21.29	21.23	21.16		
10	64QAM	25	0	19.86	20.00	19.97	21	3
10	64QAM	25	12	19.94	19.91	19.94		
10	64QAM	25	25	19.93	19.89	19.86		
10	64QAM	50	0	19.82	19.89	19.87		



Channel				23035	23095	23155	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	22.60	22.63	22.61	24	0
5	QPSK	1	12	22.67	22.79	22.91		
5	QPSK	1	24	22.86	22.81	22.87		
5	QPSK	12	0	21.80	21.86	21.92	23	1
5	QPSK	12	7	21.81	21.85	21.86		
5	QPSK	12	13	21.84	21.89	21.90		
5	QPSK	25	0	21.81	21.86	21.89	23	1
5	16QAM	1	0	22.06	22.25	22.30		
5	16QAM	1	12	21.92	22.03	22.04		
5	16QAM	1	24	22.16	22.12	22.20	22	2
5	16QAM	12	0	20.83	20.90	20.93		
5	16QAM	12	7	20.86	20.87	20.87		
5	16QAM	12	13	20.91	20.87	20.91	22	2
5	16QAM	25	0	20.76	20.85	20.89		
5	64QAM	1	0	20.95	20.99	21.10		
5	64QAM	1	12	20.81	20.82	20.77	22	2
5	64QAM	1	24	21.00	20.95	21.07		
5	64QAM	12	0	19.80	19.84	19.92		
5	64QAM	12	7	19.83	19.86	19.87	21	3
5	64QAM	12	13	19.89	19.86	19.92		
5	64QAM	25	0	19.77	19.86	19.89		
Channel				23025	23095	23165	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	22.67	22.47	22.35	24	0
3	QPSK	1	8	22.70	22.77	22.80		
3	QPSK	1	14	22.68	22.73	22.71		
3	QPSK	8	0	21.67	21.78	21.78	23	1
3	QPSK	8	4	21.71	21.80	21.85		
3	QPSK	8	7	21.79	21.80	21.79		
3	QPSK	15	0	21.68	21.78	21.82	23	1
3	16QAM	1	0	21.96	22.15	22.22		
3	16QAM	1	8	22.03	22.17	22.36		
3	16QAM	1	14	21.98	22.10	22.23	22	2
3	16QAM	8	0	20.72	20.87	20.77		
3	16QAM	8	4	20.76	20.85	20.90		
3	16QAM	8	7	20.84	20.84	20.81	22	2
3	16QAM	15	0	20.72	20.74	20.85		
3	64QAM	1	0	20.83	20.84	20.89		
3	64QAM	1	8	20.84	20.96	20.95	22	2
3	64QAM	1	14	20.79	20.90	20.91		
3	64QAM	8	0	19.67	19.83	19.78		
3	64QAM	8	4	19.73	19.77	19.86	21	3
3	64QAM	8	7	19.78	19.77	19.86		
3	64QAM	15	0	19.69	19.74	19.88		



Channel				23017	23095	23173	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	22.49	22.44	22.34	24	0
1.4	QPSK	1	3	22.63	22.73	22.81		
1.4	QPSK	1	5	22.54	22.72	22.70		
1.4	QPSK	3	0	22.66	22.75	22.66		
1.4	QPSK	3	1	22.74	22.72	22.72		
1.4	QPSK	3	3	22.59	22.70	22.72		
1.4	QPSK	6	0	21.71	21.70	21.78	23	1
1.4	16QAM	1	0	21.92	22.08	22.24	23	1
1.4	16QAM	1	3	21.95	22.08	22.32		
1.4	16QAM	1	5	21.87	22.12	22.18		
1.4	16QAM	3	0	21.82	21.82	21.74		
1.4	16QAM	3	1	21.86	21.81	21.79		
1.4	16QAM	3	3	21.72	21.77	21.73		
1.4	16QAM	6	0	20.79	20.74	20.78	22	2
1.4	64QAM	1	0	20.73	20.94	20.98	22	2
1.4	64QAM	1	3	20.72	20.89	20.97		
1.4	64QAM	1	5	20.77	20.89	20.85		
1.4	64QAM	3	0	20.75	20.85	20.83		
1.4	64QAM	3	1	20.84	20.84	20.86		
1.4	64QAM	3	3	20.70	20.80	20.80		
1.4	64QAM	6	0	19.74	19.75	19.66	21	3



<LTE Band 25>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26140	26340	26590		
Frequency (MHz)				1860	1880	1905		
20	QPSK	1	0	22.55	22.51	22.64	24	0
20	QPSK	1	49	22.69	22.54	22.76		
20	QPSK	1	99	22.78	22.94	22.71		
20	QPSK	50	0	21.89	21.90	21.89	23	1
20	QPSK	50	24	21.82	21.83	21.85		
20	QPSK	50	50	21.77	21.79	21.84		
20	QPSK	100	0	21.88	22.03	21.90		
20	16QAM	1	0	22.37	22.37	22.36	23	1
20	16QAM	1	49	22.07	22.08	22.25		
20	16QAM	1	99	21.87	22.07	21.99		
20	16QAM	50	0	20.89	20.86	20.85	22	2
20	16QAM	50	24	20.82	20.78	20.90		
20	16QAM	50	50	20.77	20.83	20.88		
20	16QAM	100	0	20.86	20.84	20.94		
20	64QAM	1	0	21.20	21.20	21.25	22	2
20	64QAM	1	49	20.82	20.93	21.04		
20	64QAM	1	99	20.81	20.92	20.86		
20	64QAM	50	0	19.88	19.83	19.90	21	3
20	64QAM	50	24	19.79	19.77	19.88		
20	64QAM	50	50	19.75	19.82	19.80		
20	64QAM	100	0	19.90	19.86	19.93		



Channel				26115	26340	26615	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1907.5		
15	QPSK	1	0	22.17	22.18	22.19	24	0
15	QPSK	1	37	22.27	22.24	22.22		
15	QPSK	1	74	22.34	22.35	22.34		
15	QPSK	36	0	21.99	21.92	22.00	23	1
15	QPSK	36	20	21.91	21.85	21.90		
15	QPSK	36	39	21.94	21.86	21.97		
15	QPSK	75	0	21.95	21.93	22.01	23	1
15	16QAM	1	0	22.31	22.31	22.41		
15	16QAM	1	37	22.09	22.07	22.15		
15	16QAM	1	74	22.17	22.30	22.24	22	2
15	16QAM	36	0	20.97	20.93	21.02		
15	16QAM	36	20	20.90	20.89	20.90		
15	16QAM	36	39	20.90	20.91	20.95	21	3
15	16QAM	75	0	20.95	20.99	21.02		
15	64QAM	1	0	21.18	21.13	21.24		
15	64QAM	1	37	21.00	21.04	21.05	22	2
15	64QAM	1	74	21.05	21.20	21.06		
15	64QAM	36	0	20.01	19.94	20.01		
15	64QAM	36	20	19.88	19.85	19.89	21	3
15	64QAM	36	39	19.91	19.84	19.94		
15	64QAM	75	0	19.95	19.93	20.03		
Channel				26090	26340	26640	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1910		
10	QPSK	1	0	22.67	22.78	22.87	24	0
10	QPSK	1	25	22.85	22.72	22.79		
10	QPSK	1	49	22.84	22.86	22.78		
10	QPSK	25	0	22.48	22.32	22.35	23	1
10	QPSK	25	12	22.41	22.29	22.35		
10	QPSK	25	25	22.43	22.33	22.38		
10	QPSK	50	0	22.40	22.32	22.38	23	1
10	16QAM	1	0	22.45	22.45	22.23		
10	16QAM	1	25	22.14	22.31	22.34		
10	16QAM	1	49	22.46	22.47	22.13	22	2
10	16QAM	25	0	21.42	21.36	21.36		
10	16QAM	25	12	21.38	21.27	21.33		
10	16QAM	25	25	21.41	21.25	21.37	21	3
10	16QAM	50	0	21.50	21.30	21.37		
10	64QAM	1	0	21.45	21.45	21.41		
10	64QAM	1	25	21.35	21.41	21.46	22	2
10	64QAM	1	49	21.46	21.14	21.01		
10	64QAM	25	0	20.47	20.36	20.35		
10	64QAM	25	12	20.39	20.28	20.36	21	3
10	64QAM	25	25	20.41	20.34	20.40		
10	64QAM	50	0	20.41	20.30	20.38		



Channel				26065	26340	26665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1912.5		
5	QPSK	1	0	22.46	22.64	22.74	24	0
5	QPSK	1	12	22.81	22.67	22.69		
5	QPSK	1	24	22.86	22.70	22.75		
5	QPSK	12	0	22.45	22.34	22.34	23	1
5	QPSK	12	7	22.39	22.31	22.25		
5	QPSK	12	13	22.38	22.19	22.23		
5	QPSK	25	0	22.46	22.31	22.31	23	1
5	16QAM	1	0	22.46	22.46	22.36		
5	16QAM	1	12	22.14	22.48	22.49		
5	16QAM	1	24	22.35	22.46	22.23	22	2
5	16QAM	12	0	21.48	21.37	21.41		
5	16QAM	12	7	21.46	21.32	21.38		
5	16QAM	12	13	21.39	21.28	21.30	21	3
5	16QAM	25	0	21.39	21.25	21.35		
5	64QAM	1	0	21.45	21.36	21.14		
5	64QAM	1	12	21.46	21.37	21.40	22	2
5	64QAM	1	24	21.35	21.33	21.12		
5	64QAM	12	0	20.47	20.33	20.37		
5	64QAM	12	7	20.42	20.31	20.33	21	3
5	64QAM	12	13	20.38	20.27	20.31		
5	64QAM	25	0	20.45	20.32	20.33		
Channel				26055	26340	26675	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1913.5		
3	QPSK	1	0	22.61	22.70	22.70	24	0
3	QPSK	1	8	22.53	22.43	22.49		
3	QPSK	1	14	22.52	22.38	22.44		
3	QPSK	8	0	22.15	22.01	22.08	23	1
3	QPSK	8	4	22.18	22.03	22.11		
3	QPSK	8	7	22.14	21.97	22.10		
3	QPSK	15	0	22.19	21.98	22.15	23	1
3	16QAM	1	0	22.46	22.22	22.45		
3	16QAM	1	8	22.40	22.26	22.36		
3	16QAM	1	14	22.35	22.16	22.23	22	2
3	16QAM	8	0	21.23	21.11	21.27		
3	16QAM	8	4	21.25	21.06	21.25		
3	16QAM	8	7	21.22	21.08	21.19	22	2
3	16QAM	15	0	21.15	20.99	21.12		
3	64QAM	1	0	21.29	21.15	21.21		
3	64QAM	1	8	21.27	21.10	21.31	21	3
3	64QAM	1	14	21.22	21.09	21.11		
3	64QAM	8	0	20.13	20.00	20.12		
3	64QAM	8	4	20.16	20.02	20.12	21	3
3	64QAM	8	7	20.10	19.94	20.07		
3	64QAM	15	0	20.15	20.03	20.18		



Channel				26047	26340	26683	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1914.3		
1.4	QPSK	1	0	22.43	22.51	22.70	24	0
1.4	QPSK	1	3	22.49	22.45	22.67		
1.4	QPSK	1	5	22.44	22.34	22.56		
1.4	QPSK	3	0	22.50	22.46	22.56		
1.4	QPSK	3	1	22.53	22.49	22.56		
1.4	QPSK	3	3	22.52	22.41	22.58		
1.4	QPSK	6	0	22.03	22.05	22.08	23	1
1.4	16QAM	1	0	22.31	22.26	22.43	23	1
1.4	16QAM	1	3	22.44	22.37	22.35		
1.4	16QAM	1	5	22.33	22.25	22.17		
1.4	16QAM	3	0	22.14	22.13	22.19		
1.4	16QAM	3	1	22.15	22.20	22.18		
1.4	16QAM	3	3	22.07	22.11	22.02		
1.4	16QAM	6	0	21.19	21.15	21.11	22	2
1.4	64QAM	1	0	21.33	21.27	21.17	22	2
1.4	64QAM	1	3	21.36	21.25	21.22		
1.4	64QAM	1	5	21.28	21.17	21.03		
1.4	64QAM	3	0	21.23	21.15	21.18		
1.4	64QAM	3	1	21.22	21.19	21.19		
1.4	64QAM	3	3	21.17	21.10	21.03		
1.4	64QAM	6	0	20.15	20.08	20.10	21	3



<LTE Band 26>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26765	26865	26965		
Frequency (MHz)				821.5	831.5	841.5		
15	QPSK	1	0	22.94	22.98	22.91	24	0
15	QPSK	1	37	22.73	22.71	22.76		
15	QPSK	1	74	23.27	23.07	23.11		
15	QPSK	36	0	21.79	21.80	21.74	23	1
15	QPSK	36	20	21.67	21.58	21.52		
15	QPSK	36	39	21.60	21.33	21.38		
15	QPSK	75	0	21.67	21.59	21.68		
15	16QAM	1	0	21.93	22.01	21.86	23	1
15	16QAM	1	37	21.65	21.67	21.57		
15	16QAM	1	74	22.14	22.14	22.10		
15	16QAM	36	0	20.81	20.75	20.73	22	2
15	16QAM	36	20	20.65	20.56	20.53		
15	16QAM	36	39	20.56	20.27	20.37		
15	16QAM	75	0	20.72	20.65	20.67		
15	64QAM	1	0	20.91	20.93	20.84	22	2
15	64QAM	1	37	20.66	20.55	20.58		
15	64QAM	1	74	21.11	21.02	21.06		
15	64QAM	36	0	19.84	19.77	19.75	21	3
15	64QAM	36	20	19.67	19.57	19.56		
15	64QAM	36	39	19.55	19.28	19.37		
15	64QAM	75	0	19.68	19.62	19.65		



FCC SAR Test Report

Report No. : FA922110

Channel				26740	26865	26990	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				819	831.5	844		
10	QPSK	1	0	22.84	22.86	22.84	24	0
10	QPSK	1	25	23.02	22.82	22.64		
10	QPSK	1	49	23.19	23.08	23.02		
10	QPSK	25	0	21.76	21.65	21.48	23	1
10	QPSK	25	12	21.78	21.59	21.49		
10	QPSK	25	25	21.72	21.65	21.58		
10	QPSK	50	0	21.67	21.64	21.51	23	1
10	16QAM	1	0	22.03	22.01	21.85		
10	16QAM	1	25	21.89	21.74	21.70		
10	16QAM	1	49	22.09	22.04	21.85	22	2
10	16QAM	25	0	20.78	20.63	20.47		
10	16QAM	25	12	20.73	20.59	20.47		
10	16QAM	25	25	20.68	20.60	20.48	22	2
10	16QAM	50	0	20.70	20.63	20.55		
10	64QAM	1	0	20.94	20.89	20.81		
10	64QAM	1	25	20.82	20.64	20.58	22	2
10	64QAM	1	49	21.07	20.94	20.86		
10	64QAM	25	0	19.78	19.65	19.49		
10	64QAM	25	12	19.76	19.62	19.48	21	3
10	64QAM	25	25	19.74	19.62	19.53		
10	64QAM	50	0	19.64	19.62	19.49		
Channel				26715	26865	27015	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				816.5	831.5	846.5		
5	QPSK	1	0	22.34	22.34	22.43	24	0
5	QPSK	1	12	22.65	22.65	22.65		
5	QPSK	1	24	22.66	22.66	22.66		
5	QPSK	12	0	21.42	21.42	21.42	23	1
5	QPSK	12	7	21.45	21.45	21.45		
5	QPSK	12	13	21.43	21.43	21.43		
5	QPSK	25	0	21.46	21.46	21.46	23	1
5	16QAM	1	0	21.63	21.63	21.63		
5	16QAM	1	12	21.51	21.51	21.51		
5	16QAM	1	24	21.58	21.58	21.58	22	2
5	16QAM	12	0	20.49	20.49	20.49		
5	16QAM	12	7	20.51	20.51	20.51		
5	16QAM	12	13	20.44	20.44	20.44	22	2
5	16QAM	25	0	20.41	20.41	20.41		
5	64QAM	1	0	20.56	20.56	20.56		
5	64QAM	1	12	20.43	20.43	20.43	22	2
5	64QAM	1	24	20.56	20.56	20.56		
5	64QAM	12	0	19.48	19.48	19.48		
5	64QAM	12	7	19.49	19.49	19.49	21	3
5	64QAM	12	13	19.43	19.43	19.43		
5	64QAM	25	0	19.50	19.50	19.50		



Channel				26705	26865	27025	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				815.5	831.5	847.5		
3	QPSK	1	0	22.45	22.64	22.45	24	0
3	QPSK	1	8	22.86	22.64	22.55		
3	QPSK	1	14	22.77	22.61	22.52		
3	QPSK	8	0	21.50	21.39	21.33	23	1
3	QPSK	8	4	21.59	21.39	21.32		
3	QPSK	8	7	21.57	21.42	21.30		
3	QPSK	15	0	21.55	21.37	21.30	23	1
3	16QAM	1	0	21.72	21.58	21.42		
3	16QAM	1	8	21.84	21.66	21.53		
3	16QAM	1	14	21.75	21.50	21.48	22	2
3	16QAM	8	0	20.51	20.50	20.39		
3	16QAM	8	4	20.63	20.49	20.35		
3	16QAM	8	7	20.58	20.45	20.35	21	3
3	16QAM	15	0	20.59	20.45	20.34		
3	64QAM	1	0	20.55	20.52	20.42		
3	64QAM	1	8	20.71	20.48	20.41	22	2
3	64QAM	1	14	20.59	20.44	20.40		
3	64QAM	8	0	19.52	19.47	19.32		
3	64QAM	8	4	19.63	19.45	19.36	21	3
3	64QAM	8	7	19.62	19.41	19.31		
3	64QAM	15	0	19.62	19.42	19.34		
Channel				26697	26865	27033	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				814.7	831.5	848.3		
1.4	QPSK	1	0	22.69	22.64	22.60	24	0
1.4	QPSK	1	3	22.76	22.59	22.54		
1.4	QPSK	1	5	22.71	22.55	22.48		
1.4	QPSK	3	0	22.66	22.55	22.44		
1.4	QPSK	3	1	22.68	22.64	22.48		
1.4	QPSK	3	3	22.67	22.60	22.42		
1.4	QPSK	6	0	21.48	21.37	21.31	23	1
1.4	16QAM	1	0	21.70	21.57	21.47	23	1
1.4	16QAM	1	3	21.79	21.61	21.49		
1.4	16QAM	1	5	21.63	21.53	21.40		
1.4	16QAM	3	0	21.46	21.36	21.33		
1.4	16QAM	3	1	21.56	21.46	21.37		
1.4	16QAM	3	3	21.44	21.34	21.29		
1.4	16QAM	6	0	20.50	20.44	20.27	22	2
1.4	64QAM	1	0	20.49	20.44	20.35	22	2
1.4	64QAM	1	3	20.49	20.49	20.39		
1.4	64QAM	1	5	20.50	20.43	20.38		
1.4	64QAM	3	0	20.47	20.41	20.27		
1.4	64QAM	3	1	20.49	20.45	20.29		
1.4	64QAM	3	3	20.44	20.41	20.25		
1.4	64QAM	6	0	19.46	19.39	19.23	21	3



<LTE Band 66>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572		
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	22.28	22.62	22.35	24	0
20	QPSK	1	49	22.60	22.68	22.46		
20	QPSK	1	99	22.69	22.85	22.72		
20	QPSK	50	0	21.64	21.75	21.70	23	1
20	QPSK	50	24	21.50	21.72	21.60		
20	QPSK	50	50	21.54	21.75	21.74		
20	QPSK	100	0	21.54	21.83	21.77	23	1
20	16QAM	1	0	21.96	22.06	22.20		
20	16QAM	1	49	21.96	21.85	21.90		
20	16QAM	1	99	22.15	22.16	22.18	22	2
20	16QAM	50	0	20.59	20.79	20.69		
20	16QAM	50	24	20.46	20.77	20.63		
20	16QAM	50	50	20.50	20.77	20.66	22	2
20	16QAM	100	0	20.60	20.76	20.71		
20	64QAM	1	0	21.10	21.05	20.61		
20	64QAM	1	49	20.85	20.81	20.72	22	2
20	64QAM	1	99	20.64	20.64	20.67		
20	64QAM	50	0	19.76	19.78	19.66		
20	64QAM	50	24	19.67	19.77	19.57	21	3
20	64QAM	50	50	19.49	19.75	19.62		
20	64QAM	100	0	19.54	19.80	19.73		



Channel				132047	132322	132597	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1745	1772.5		
15	QPSK	1	0	22.49	22.82	22.46	24	0
15	QPSK	1	37	22.49	22.83	22.49		
15	QPSK	1	74	22.71	22.84	22.67		
15	QPSK	36	0	21.58	21.82	21.71	23	1
15	QPSK	36	20	21.62	21.76	21.57		
15	QPSK	36	39	21.54	21.70	21.60		
15	QPSK	75	0	21.49	21.82	21.66	23	1
15	16QAM	1	0	22.10	22.15	22.31		
15	16QAM	1	37	22.41	22.04	22.03		
15	16QAM	1	74	22.23	22.39	22.22	22	2
15	16QAM	36	0	20.61	20.82	20.75		
15	16QAM	36	20	20.60	20.70	20.61		
15	16QAM	36	39	20.56	20.75	20.67	22	2
15	16QAM	75	0	20.46	20.78	20.72		
15	64QAM	1	0	20.88	20.89	20.91		
15	64QAM	1	37	20.84	20.95	20.88	22	2
15	64QAM	1	74	21.07	21.02	21.08		
15	64QAM	36	0	19.58	19.80	19.70		
15	64QAM	36	20	19.62	19.74	19.56	21	3
15	64QAM	36	39	19.53	19.71	19.62		
15	64QAM	75	0	19.48	19.80	19.71		
Channel				132022	132322	132622	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1745	1775		
10	QPSK	1	0	22.47	22.80	22.45	24	0
10	QPSK	1	25	22.53	22.67	22.59		
10	QPSK	1	49	22.82	22.61	22.68		
10	QPSK	25	0	21.76	21.82	21.80	23	1
10	QPSK	25	12	21.74	21.82	21.77		
10	QPSK	25	25	21.77	21.92	21.76		
10	QPSK	50	0	21.74	21.94	21.78	23	1
10	16QAM	1	0	22.11	22.25	22.27		
10	16QAM	1	25	22.03	22.08	22.01		
10	16QAM	1	49	22.29	22.37	22.27	22	2
10	16QAM	25	0	20.71	20.92	20.80		
10	16QAM	25	12	20.71	20.92	20.82		
10	16QAM	25	25	20.74	20.99	20.81	22	2
10	16QAM	50	0	20.75	20.94	20.78		
10	64QAM	1	0	20.95	21.15	21.14		
10	64QAM	1	25	20.88	20.96	20.93	22	2
10	64QAM	1	49	21.14	21.31	21.15		
10	64QAM	25	0	19.75	19.90	19.79		
10	64QAM	25	12	19.70	19.94	19.84	21	3
10	64QAM	25	25	19.73	19.97	19.79		
10	64QAM	50	0	19.69	19.92	19.78		



Channel				131997	132322	132647	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1745	1777.5		
5	QPSK	1	0	22.47	22.21	22.63	24	0
5	QPSK	1	12	22.49	22.71	22.56		
5	QPSK	1	24	22.50	22.78	22.52		
5	QPSK	12	0	21.63	21.85	21.76	23	1
5	QPSK	12	7	21.62	21.85	21.67		
5	QPSK	12	13	21.58	21.78	21.61		
5	QPSK	25	0	21.65	21.90	21.74	23	1
5	16QAM	1	0	22.05	22.32	22.21		
5	16QAM	1	12	21.90	22.05	22.01		
5	16QAM	1	24	21.89	22.22	21.98	22	2
5	16QAM	12	0	20.67	20.84	20.78		
5	16QAM	12	7	20.63	20.83	20.73		
5	16QAM	12	13	20.62	20.84	20.69	22	2
5	16QAM	25	0	20.65	20.82	20.82		
5	64QAM	1	0	21.11	21.17	21.23		
5	64QAM	1	12	20.92	20.86	21.10	22	2
5	64QAM	1	24	20.94	21.02	21.15		
5	64QAM	12	0	19.67	19.81	19.79		
5	64QAM	12	7	19.63	19.82	19.75	21	3
5	64QAM	12	13	19.61	19.84	19.72		
5	64QAM	25	0	19.68	19.84	19.74		
Channel				131987	132322	132657	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1745	1778.5		
3	QPSK	1	0	22.48	22.31	22.31	24	0
3	QPSK	1	8	22.48	22.69	22.51		
3	QPSK	1	14	22.44	22.50	22.57		
3	QPSK	8	0	21.66	21.89	21.70	23	1
3	QPSK	8	4	21.66	21.83	21.67		
3	QPSK	8	7	21.62	21.75	21.64		
3	QPSK	15	0	21.57	21.81	21.65	23	1
3	16QAM	1	0	22.06	22.15	21.98		
3	16QAM	1	8	21.97	22.27	21.93		
3	16QAM	1	14	22.00	22.24	21.82	22	2
3	16QAM	8	0	20.69	20.91	20.78		
3	16QAM	8	4	20.64	20.85	20.82		
3	16QAM	8	7	20.69	20.75	20.74	22	2
3	16QAM	15	0	20.61	20.82	20.67		
3	64QAM	1	0	20.93	20.98	20.86		
3	64QAM	1	8	20.89	20.97	20.83	22	2
3	64QAM	1	14	20.85	20.96	20.86		
3	64QAM	8	0	19.67	19.94	19.69		
3	64QAM	8	4	19.62	19.84	19.71	21	3
3	64QAM	8	7	19.67	19.82	19.64		
3	64QAM	15	0	19.57	19.84	19.65		



Channel				131979	132322	132665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1745	1779.3		
1.4	QPSK	1	0	22.47	22.38	22.58	24	0
1.4	QPSK	1	3	22.52	22.74	22.66		
1.4	QPSK	1	5	22.49	22.72	22.55		
1.4	QPSK	3	0	22.52	22.71	22.52		
1.4	QPSK	3	1	22.53	22.74	22.65		
1.4	QPSK	3	3	22.54	22.68	22.53		
1.4	QPSK	6	0	21.62	21.84	21.64	23	1
1.4	16QAM	1	0	21.88	22.29	21.99	23	1
1.4	16QAM	1	3	21.93	22.34	22.04		
1.4	16QAM	1	5	21.92	22.19	21.96		
1.4	16QAM	3	0	21.64	21.82	21.66		
1.4	16QAM	3	1	21.69	21.84	21.74		
1.4	16QAM	3	3	21.57	21.77	21.72		
1.4	16QAM	6	0	20.67	20.87	20.72	22	2
1.4	64QAM	1	0	20.77	21.08	20.89	22	2
1.4	64QAM	1	3	20.79	21.06	20.87		
1.4	64QAM	1	5	20.70	21.00	20.79		
1.4	64QAM	3	0	20.72	20.90	20.69		
1.4	64QAM	3	1	20.71	20.91	20.64		
1.4	64QAM	3	3	20.69	20.86	20.65		
1.4	64QAM	6	0	19.62	19.82	19.64	21	3



<LTE Band 71>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				133222	133322	133372		
Frequency (MHz)				673	683	688		
20	QPSK	1	0	22.07	22.10	22.11	24	0
20	QPSK	1	49	23.13	23.01	22.92		
20	QPSK	1	99	22.81	22.81	22.84		
20	QPSK	50	0	21.90	21.75	21.71	23	1
20	QPSK	50	24	22.13	22.03	22.02		
20	QPSK	50	50	21.91	21.95	21.90		
20	QPSK	100	0	22.01	21.85	21.92	23	1
20	16QAM	1	0	21.33	21.30	21.19		
20	16QAM	1	49	22.32	22.02	22.14		
20	16QAM	1	99	21.88	22.07	22.01	22	2
20	16QAM	50	0	20.88	20.73	20.60		
20	16QAM	50	24	21.10	21.00	20.92		
20	16QAM	50	50	20.86	20.88	20.88	22	2
20	16QAM	100	0	20.97	20.83	20.80		
20	64QAM	1	0	20.19	20.07	20.04		
20	64QAM	1	49	20.99	20.97	21.01	22	2
20	64QAM	1	99	20.82	21.01	21.02		
20	64QAM	50	0	19.80	19.73	19.70		
20	64QAM	50	24	20.13	19.92	19.92	21	3
20	64QAM	50	50	20.01	19.87	19.98		
20	64QAM	100	0	20.01	20.03	19.82		



FCC SAR Test Report

Report No. : FA922110

Channel				0	133297	133397	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				670.5	680.5	690.5		
15	QPSK	1	0	23.12	23.12	23.04	24	0
15	QPSK	1	37	23.11	23.03	23.02		
15	QPSK	1	74	23.09	22.98	23.01		
15	QPSK	36	0	22.15	22.15	22.13	23	1
15	QPSK	36	20	22.18	22.14	22.07		
15	QPSK	36	39	22.19	22.11	22.04		
15	QPSK	75	0	22.19	22.12	22.06	23	1
15	16QAM	1	0	22.39	22.42	22.33		
15	16QAM	1	37	22.37	22.25	22.35		
15	16QAM	1	74	22.40	22.20	22.31	22	2
15	16QAM	36	0	21.73	21.72	21.64		
15	16QAM	36	20	21.78	21.71	21.69		
15	16QAM	36	39	21.76	21.67	21.65	22	2
15	16QAM	75	0	21.74	21.66	21.62		
15	64QAM	1	0	20.69	20.67	20.64		
15	64QAM	1	37	20.64	20.61	20.64	22	2
15	64QAM	1	74	20.70	20.53	20.60		
15	64QAM	36	0	19.63	19.61	19.53		
15	64QAM	36	20	19.67	19.61	19.58	21	3
15	64QAM	36	39	19.63	19.57	19.55		
15	64QAM	75	0	19.62	19.54	19.57		
Channel				133172	133272	133422	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				668	678	693		
10	QPSK	1	0	22.62	22.84	22.88	24	0
10	QPSK	1	25	22.68	22.92	22.96		
10	QPSK	1	49	22.75	22.95	22.96		
10	QPSK	25	0	21.68	21.88	21.98	23	1
10	QPSK	25	12	21.73	21.97	22.02		
10	QPSK	25	25	21.85	21.98	22.02		
10	QPSK	50	0	21.81	21.93	22.02	23	1
10	16QAM	1	0	22.00	22.17	22.16		
10	16QAM	1	25	22.07	22.25	22.20		
10	16QAM	1	49	22.15	22.31	22.24	22	2
10	16QAM	25	0	21.28	21.47	21.54		
10	16QAM	25	12	21.34	21.56	21.62		
10	16QAM	25	25	21.42	21.58	21.59	22	2
10	16QAM	50	0	21.40	21.53	21.61		
10	64QAM	1	0	20.35	20.55	20.57		
10	64QAM	1	25	20.46	20.68	20.62	22	2
10	64QAM	1	49	20.55	20.70	20.64		
10	64QAM	25	0	19.27	19.48	19.55		
10	64QAM	25	12	19.34	19.56	19.62	21	3
10	64QAM	25	25	19.42	19.57	19.60		
10	64QAM	50	0	19.38	19.52	19.59		



Channel				133147	133247	133447	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				665.5	675.5	695.5		
5	QPSK	1	0	22.66	22.85	22.92	24	0
5	QPSK	1	12	22.69	22.90	22.99		
5	QPSK	1	24	22.70	22.93	22.96		
5	QPSK	12	0	21.71	21.92	21.98	23	1
5	QPSK	12	7	21.76	21.98	22.02		
5	QPSK	12	13	21.72	21.95	22.05		
5	QPSK	25	0	21.71	21.91	22.01	23	1
5	16QAM	1	0	21.94	22.21	22.20		
5	16QAM	1	12	22.04	22.28	22.20		
5	16QAM	1	24	22.03	22.30	22.21	22	2
5	16QAM	12	0	21.30	21.51	21.55		
5	16QAM	12	7	21.35	21.57	21.60		
5	16QAM	12	13	21.37	21.58	21.62	22	2
5	16QAM	25	0	21.30	21.53	21.59		
5	64QAM	1	0	20.40	20.61	20.64		
5	64QAM	1	12	20.40	20.65	20.63	22	2
5	64QAM	1	24	20.41	20.69	20.60		
5	64QAM	12	0	19.29	19.48	19.53		
5	64QAM	12	7	19.33	19.56	19.57	21	3
5	64QAM	12	13	19.35	19.55	19.60		
5	64QAM	25	0	19.28	19.52	19.60		



<Reduced Power Mode for P-Sensor On>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	18.63	18.55	18.81	20	0
20	QPSK	1	49	18.75	18.71	19.14		
20	QPSK	1	99	18.84	19.12	18.97		
20	QPSK	50	0	18.92	18.90	18.89	20	0
20	QPSK	50	24	18.81	18.84	18.86		
20	QPSK	50	50	18.85	18.90	18.96		
20	QPSK	100	0	18.96	18.97	19.39		
20	16QAM	1	0	19.27	19.34	19.18	20	0
20	16QAM	1	49	18.97	19.20	19.36		
20	16QAM	1	99	19.30	19.49	18.95		
20	16QAM	50	0	18.98	18.90	18.90	20	0
20	16QAM	50	24	18.85	18.86	18.98		
20	16QAM	50	50	18.88	18.98	18.95		
20	16QAM	100	0	18.99	18.91	19.31		
20	64QAM	1	0	19.28	19.19	19.16	20	0
20	64QAM	1	49	19.00	18.96	19.26		
20	64QAM	1	99	19.13	19.38	18.92		
20	64QAM	50	0	18.86	18.91	18.89	20	0
20	64QAM	50	24	18.83	18.87	18.99		
20	64QAM	50	50	18.88	18.94	18.96		
20	64QAM	100	0	18.91	18.94	19.06		



FCC SAR Test Report

Report No. : FA922110

Channel				18675	17.57	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	18.52	18.31	18.49	20	0
15	QPSK	1	37	18.54	18.50	18.57		
15	QPSK	1	74	18.66	18.87	18.08		
15	QPSK	36	0	18.57	18.57	18.62	20	0
15	QPSK	36	20	18.50	18.43	18.56		
15	QPSK	36	39	18.50	18.59	18.55		
15	QPSK	75	0	18.53	18.58	18.69	20	0
15	16QAM	1	0	19.03	18.82	18.88		
15	16QAM	1	37	18.62	18.82	18.79		
15	16QAM	1	74	18.55	18.71	18.61	20	0
15	16QAM	36	0	18.57	18.57	18.57		
15	16QAM	36	20	18.56	18.46	18.58		
15	16QAM	36	39	18.56	18.56	18.51	20	0
15	16QAM	75	0	18.59	18.53	18.67		
15	64QAM	1	0	18.81	18.92	18.93		
15	64QAM	1	37	18.27	18.63	18.80	20	0
15	64QAM	1	74	18.44	18.63	18.60		
15	64QAM	36	0	18.76	18.53	18.59		
15	64QAM	36	20	18.60	18.49	18.65	20	0
15	64QAM	36	39	18.56	18.53	18.60		
15	64QAM	75	0	18.57	18.54	18.56		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	18.55	18.41	18.51	20	0
10	QPSK	1	25	18.82	18.67	18.73		
10	QPSK	1	49	19.05	18.99	19.01		
10	QPSK	25	0	18.84	18.79	18.82	20	0
10	QPSK	25	12	18.87	18.77	18.74		
10	QPSK	25	25	18.85	18.77	18.79		
10	QPSK	50	0	18.82	18.70	18.87	20	0
10	16QAM	1	0	19.36	19.30	19.30		
10	16QAM	1	25	19.05	18.93	18.92		
10	16QAM	1	49	19.36	19.24	19.23	20	0
10	16QAM	25	0	18.84	18.77	18.76		
10	16QAM	25	12	18.85	18.78	18.76		
10	16QAM	25	25	18.82	18.80	18.84	20	0
10	16QAM	50	0	18.91	18.81	18.82		
10	64QAM	1	0	19.24	19.15	19.10		
10	64QAM	1	25	18.94	18.81	18.88	20	0
10	64QAM	1	49	19.31	19.22	19.17		
10	64QAM	25	0	18.87	18.78	18.76		
10	64QAM	25	12	18.87	18.78	18.78	20	0
10	64QAM	25	25	18.85	18.82	18.84		
10	64QAM	50	0	18.79	18.72	18.74		



Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	18.54	18.44	18.47	20	0
5	QPSK	1	12	18.95	18.85	18.82		
5	QPSK	1	24	18.98	18.92	18.87		
5	QPSK	12	0	19.08	18.97	19.02	20	0
5	QPSK	12	7	19.05	18.89	18.93		
5	QPSK	12	13	18.98	18.84	18.88		
5	QPSK	25	0	19	18.9	18.91	20	0
5	16QAM	1	0	19.39	19.3	19.14		
5	16QAM	1	12	19.12	19.02	19.17		
5	16QAM	1	24	19.17	19.07	19.09	20	0
5	16QAM	12	0	19.2	18.96	19.04		
5	16QAM	12	7	19.06	18.96	18.94		
5	16QAM	12	13	18.97	18.9	18.91	20	0
5	16QAM	25	0	18.99	18.97	18.92		
5	64QAM	1	0	19.21	19.16	19.09		
5	64QAM	1	12	19.09	19	18.98	20	0
5	64QAM	1	24	19.09	19	18.92		
5	64QAM	12	0	19.07	18.92	18.95		
5	64QAM	12	7	19.04	18.9	18.95	20	0
5	64QAM	12	13	18.96	18.81	18.9		
5	64QAM	25	0	18.99	18.9	18.94		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	18.62	18.74	18.47	20	0
3	QPSK	1	8	18.63	18.85	18.82		
3	QPSK	1	14	18.84	18.92	18.87		
3	QPSK	8	0	18.95	18.97	19.02	20	0
3	QPSK	8	4	18.96	18.89	18.93		
3	QPSK	8	7	18.97	18.84	18.88		
3	QPSK	15	0	18.98	18.90	18.91	20	0
3	16QAM	1	0	18.99	19.30	19.14		
3	16QAM	1	8	19.00	19.02	19.17		
3	16QAM	1	14	19.01	19.07	19.09	20	0
3	16QAM	8	0	19.02	18.96	19.04		
3	16QAM	8	4	19.03	18.96	18.94		
3	16QAM	8	7	19.04	18.90	18.91	20	0
3	16QAM	15	0	19.05	18.97	18.92		
3	64QAM	1	0	19.06	19.16	19.09		
3	64QAM	1	8	19.07	19.00	18.98	20	0
3	64QAM	1	14	19.08	19.00	18.92		
3	64QAM	8	0	19.09	18.92	18.95		
3	64QAM	8	4	19.10	18.90	18.95	20	0
3	64QAM	8	7	19.11	18.81	18.90		
3	64QAM	15	0	19.12	18.90	18.94		



Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	18.70	18.19	18.17	20	0
1.4	QPSK	1	3	18.73	18.62	18.67		
1.4	QPSK	1	5	18.65	18.54	18.53		
1.4	QPSK	3	0	18.72	18.57	18.63		
1.4	QPSK	3	1	18.77	18.62	18.64		
1.4	QPSK	3	3	18.70	18.57	18.64		
1.4	QPSK	6	0	18.74	18.58	18.66	20	0
1.4	16QAM	1	0	19.04	18.78	18.94	20	0
1.4	16QAM	1	3	18.98	18.84	18.95		
1.4	16QAM	1	5	18.94	18.85	18.84		
1.4	16QAM	3	0	18.77	18.63	18.68		
1.4	16QAM	3	1	18.85	18.67	18.75		
1.4	16QAM	3	3	18.76	18.60	18.58		
1.4	16QAM	6	0	18.87	18.71	18.67	20	0
1.4	64QAM	1	0	18.85	18.78	18.81	20	0
1.4	64QAM	1	3	18.89	18.79	18.99		
1.4	64QAM	1	5	18.79	18.54	18.72		
1.4	64QAM	3	0	18.78	18.67	18.76		
1.4	64QAM	3	1	18.78	18.69	18.73		
1.4	64QAM	3	3	18.74	18.64	18.71		
1.4	64QAM	6	0	18.76	18.65	18.59	20	0



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	14.56	14.39	14.22	15.5	0
20	QPSK	1	49	14.45	14.36	14.47		
20	QPSK	1	99	14.86	14.69	14.51		
20	QPSK	50	0	14.60	14.72	14.62	15.5	0
20	QPSK	50	24	14.54	14.64	14.60		
20	QPSK	50	50	14.55	14.45	14.50		
20	QPSK	100	0	14.37	14.68	14.61	15.5	0
20	16QAM	1	0	15.02	14.90	14.85		
20	16QAM	1	49	15.13	14.86	14.69		
20	16QAM	1	99	15.09	14.73	14.68	15.5	0
20	16QAM	50	0	14.47	14.63	14.67		
20	16QAM	50	24	14.50	14.55	14.59		
20	16QAM	50	50	14.46	14.53	14.50	15.5	0
20	16QAM	100	0	14.63	14.61	14.53		
20	64QAM	1	0	14.81	14.67	14.85		
20	64QAM	1	49	14.53	14.35	14.62	15.5	0
20	64QAM	1	99	14.91	14.75	14.71		
20	64QAM	50	0	14.49	14.66	14.64		
20	64QAM	50	24	14.52	14.63	14.61	15.5	0
20	64QAM	50	50	14.48	14.48	14.58		
20	64QAM	100	0	14.57	14.57	14.58		



Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	14.59	14.59	14.59	15.5	0
15	QPSK	1	37	14.55	14.38	14.47		
15	QPSK	1	74	14.89	14.64	14.68		
15	QPSK	36	0	14.74	14.63	14.66	15.5	0
15	QPSK	36	20	14.65	14.59	14.62		
15	QPSK	36	39	14.55	14.53	14.52		
15	QPSK	75	0	14.62	14.62	14.62	15.5	0
15	16QAM	1	0	15.11	15.05	14.99		
15	16QAM	1	37	14.92	14.67	14.68		
15	16QAM	1	74	15.05	14.98	14.70	15.5	0
15	16QAM	36	0	14.63	14.71	14.63		
15	16QAM	36	20	14.73	14.61	14.64		
15	16QAM	36	39	14.59	14.65	14.50	15.5	0
15	16QAM	75	0	14.50	14.60	14.67		
15	64QAM	1	0	14.87	14.78	14.82		
15	64QAM	1	37	14.94	14.94	14.83	15.5	0
15	64QAM	1	74	14.99	14.79	14.70		
15	64QAM	36	0	14.73	14.73	14.57		
15	64QAM	36	20	14.74	14.62	14.65	15.5	0
15	64QAM	36	39	14.59	14.58	14.52		
15	64QAM	75	0	14.63	14.62	14.69		
Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	14.46	14.43	14.48	15.5	0
10	QPSK	1	25	14.70	14.44	14.65		
10	QPSK	1	49	15.18	15.26	15.23		
10	QPSK	25	0	14.83	14.82	14.72	15.5	0
10	QPSK	25	12	14.79	14.72	14.73		
10	QPSK	25	25	14.92	14.96	14.76		
10	QPSK	50	0	14.77	14.89	14.83	15.5	0
10	16QAM	1	0	15.02	15.16	14.98		
10	16QAM	1	25	14.65	14.71	14.50		
10	16QAM	1	49	15.19	15.11	15.15	15.5	0
10	16QAM	25	0	14.86	14.71	14.81		
10	16QAM	25	12	14.80	14.66	14.66		
10	16QAM	25	25	14.83	14.91	14.73	15.5	0
10	16QAM	50	0	14.89	14.80	14.82		
10	64QAM	1	0	14.71	14.99	14.93		
10	64QAM	1	25	14.42	14.66	14.39	15.5	0
10	64QAM	1	49	15.09	15.26	15.20		
10	64QAM	25	0	14.86	14.71	14.81		
10	64QAM	25	12	14.80	14.78	14.70	15.5	0
10	64QAM	25	25	14.88	14.91	14.83		
10	64QAM	50	0	14.88	14.80	14.92		



Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	14.33	14.23	14.29	15.5	0
5	QPSK	1	12	14.75	14.61	14.62		
5	QPSK	1	24	14.69	14.75	14.76		
5	QPSK	12	0	14.84	14.65	14.63	15.5	0
5	QPSK	12	7	14.78	14.68	14.68		
5	QPSK	12	13	14.64	14.67	14.74		
5	QPSK	25	0	14.80	14.69	14.62	15.5	0
5	16QAM	1	0	15.25	15.05	15.00		
5	16QAM	1	12	14.78	14.94	14.74		
5	16QAM	1	24	15.07	15.02	14.86	15.5	0
5	16QAM	12	0	14.78	14.72	14.71		
5	16QAM	12	7	14.81	14.74	14.67		
5	16QAM	12	13	14.71	14.70	14.71	15.5	0
5	16QAM	25	0	14.74	14.64	14.61		
5	64QAM	1	0	15.06	15.20	15.01		
5	64QAM	1	12	14.96	14.97	14.78	15.5	0
5	64QAM	1	24	14.88	14.93	14.86		
5	64QAM	12	0	14.79	14.81	14.70		
5	64QAM	12	7	14.79	14.74	14.73	15.5	0
5	64QAM	12	13	14.71	14.87	14.81		
5	64QAM	25	0	14.80	14.75	14.65		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	14.16	14.12	14.07	15.5	0
3	QPSK	1	8	14.73	14.66	14.69		
3	QPSK	1	14	14.72	14.59	14.63		
3	QPSK	8	0	14.73	14.70	14.71	15.5	0
3	QPSK	8	4	14.73	14.69	14.66		
3	QPSK	8	7	14.72	14.66	14.62		
3	QPSK	15	0	14.77	14.64	14.71	15.5	0
3	16QAM	1	0	14.96	14.92	14.92		
3	16QAM	1	8	15.10	14.98	14.87		
3	16QAM	1	14	15.04	14.97	14.88	15.5	0
3	16QAM	8	0	14.83	14.83	14.85		
3	16QAM	8	4	14.90	14.76	14.78		
3	16QAM	8	7	14.80	14.73	14.67	15.5	0
3	16QAM	15	0	14.79	14.68	14.70		
3	64QAM	1	0	15.00	14.92	14.90		
3	64QAM	1	8	14.89	14.99	14.82	15.5	0
3	64QAM	1	14	14.94	14.91	14.86		
3	64QAM	8	0	14.79	14.87	14.79		
3	64QAM	8	4	14.87	14.78	14.74	15.5	0
3	64QAM	8	7	14.87	14.86	14.69		
3	64QAM	15	0	14.67	14.69	14.64		



Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	14.68	14.11	14.12	15.5	0
1.4	QPSK	1	3	14.60	14.69	14.70		
1.4	QPSK	1	5	14.64	14.42	14.61		
1.4	QPSK	3	0	14.66	14.66	14.64		
1.4	QPSK	3	1	14.59	14.61	14.76		
1.4	QPSK	3	3	14.67	14.58	14.64		
1.4	QPSK	6	0	14.56	14.58	14.72	15.5	0
1.4	16QAM	1	0	14.83	14.85	14.98	15.5	0
1.4	16QAM	1	3	14.87	14.85	15.02		
1.4	16QAM	1	5	14.82	14.83	14.99		
1.4	16QAM	3	0	14.71	14.66	14.61		
1.4	16QAM	3	1	14.64	14.77	14.73		
1.4	16QAM	3	3	14.57	14.59	14.71		
1.4	16QAM	6	0	14.64	14.69	14.78	15.5	0
1.4	64QAM	1	0	14.90	14.73	14.68	15.5	0
1.4	64QAM	1	3	14.86	14.68	14.84		
1.4	64QAM	1	5	14.81	14.61	14.74		
1.4	64QAM	3	0	14.78	14.77	14.67		
1.4	64QAM	3	1	14.60	14.83	14.79		
1.4	64QAM	3	3	14.71	14.69	14.69		
1.4	64QAM	6	0	14.69	14.63	14.74	15.5	0



<LTE Band 25>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26140	26340	26590		
Frequency (MHz)				1860	1880	1905		
20	QPSK	1	0	18.79	18.76	18.80	20	0
20	QPSK	1	49	18.87	18.87	18.92		
20	QPSK	1	99	18.92	19.02	18.99		
20	QPSK	50	0	18.94	19.03	19.00	20	0
20	QPSK	50	24	18.90	18.80	18.88		
20	QPSK	50	50	18.91	18.86	18.89		
20	QPSK	100	0	19.03	19.05	19.02		
20	16QAM	1	0	19.25	19.25	19.21	20	0
20	16QAM	1	49	18.94	19.00	19.12		
20	16QAM	1	99	18.86	18.98	18.88		
20	16QAM	50	0	18.82	18.81	18.82	20	0
20	16QAM	50	24	18.80	18.73	18.79		
20	16QAM	50	50	18.81	18.74	18.68		
20	16QAM	100	0	18.84	18.82	18.87		
20	64QAM	1	0	19.27	19.11	19.19	20	0
20	64QAM	1	49	18.92	18.94	19.03		
20	64QAM	1	99	18.77	18.81	18.81		
20	64QAM	50	0	18.91	18.81	18.83	20	0
20	64QAM	50	24	18.83	18.78	18.85		
20	64QAM	50	50	18.81	18.74	18.83		
20	64QAM	100	0	18.84	18.81	18.79		



Channel				26115	26340	26615	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1907.5		
15	QPSK	1	0	18.81	18.75	18.81	20	0
15	QPSK	1	37	18.79	18.72	18.73		
15	QPSK	1	74	18.86	18.90	18.88		
15	QPSK	36	0	18.94	18.84	18.92	20	0
15	QPSK	36	20	18.82	18.81	18.84		
15	QPSK	36	39	18.87	18.83	18.74		
15	QPSK	75	0	18.92	18.80	18.83	20	0
15	16QAM	1	0	19.20	19.11	19.12		
15	16QAM	1	37	19.03	18.86	19.11		
15	16QAM	1	74	19.17	18.99	19.18	20	0
15	16QAM	36	0	18.99	18.85	18.94		
15	16QAM	36	20	18.92	18.83	18.87		
15	16QAM	36	39	18.93	18.86	18.86	20	0
15	16QAM	75	0	18.95	18.82	18.95		
15	64QAM	1	0	19.25	19.19	19.07		
15	64QAM	1	37	18.75	18.75	18.79	20	0
15	64QAM	1	74	19.07	19.07	18.95		
15	64QAM	36	0	18.94	18.82	18.92		
15	64QAM	36	20	18.88	18.80	18.84	20	0
15	64QAM	36	39	18.82	18.73	18.88		
15	64QAM	75	0	18.91	18.85	18.96		
Channel				26090	26340	26640	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1910		
10	QPSK	1	0	18.68	18.57	18.66	20	0
10	QPSK	1	25	18.86	18.70	18.73		
10	QPSK	1	49	19.05	19.07	18.68		
10	QPSK	25	0	18.96	18.89	18.85	20	0
10	QPSK	25	12	18.93	18.84	18.83		
10	QPSK	25	25	18.94	18.79	18.88		
10	QPSK	50	0	18.87	18.82	18.83	20	0
10	16QAM	1	0	19.30	19.22	19.20		
10	16QAM	1	25	19.16	19.11	19.07		
10	16QAM	1	49	19.29	19.28	18.74	20	0
10	16QAM	25	0	18.90	18.82	18.87		
10	16QAM	25	12	18.88	18.76	18.88		
10	16QAM	25	25	18.95	18.85	18.88	20	0
10	16QAM	50	0	18.91	18.85	18.87		
10	64QAM	1	0	19.30	19.18	19.26		
10	64QAM	1	25	19.02	18.95	18.92	20	0
10	64QAM	1	49	19.14	19.15	18.76		
10	64QAM	25	0	18.92	18.84	18.89		
10	64QAM	25	12	18.92	18.81	18.90	20	0
10	64QAM	25	25	19.00	18.86	18.89		
10	64QAM	50	0	18.97	18.79	18.87		



Channel				26065	26340	26665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1912.5		
5	QPSK	1	0	18.54	18.50	18.57	20	0
5	QPSK	1	12	18.97	18.80	18.79		
5	QPSK	1	24	19.09	18.80	18.86		
5	QPSK	12	0	19.07	18.95	18.93	20	0
5	QPSK	12	7	19.13	18.85	18.82		
5	QPSK	12	13	18.97	18.78	18.86		
5	QPSK	25	0	19.06	18.85	18.93	20	0
5	16QAM	1	0	19.30	19.12	19.15		
5	16QAM	1	12	19.16	19.03	19.12		
5	16QAM	1	24	19.24	19.02	18.97	20	0
5	16QAM	12	0	19.13	18.91	19.03		
5	16QAM	12	7	19.08	18.87	18.95		
5	16QAM	12	13	19.03	18.83	18.98	20	0
5	16QAM	25	0	19.01	18.88	18.94		
5	64QAM	1	0	19.21	19.15	19.09		
5	64QAM	1	12	19.18	18.99	18.97	20	0
5	64QAM	1	24	19.20	18.97	18.96		
5	64QAM	12	0	19.12	18.88	19.04		
5	64QAM	12	7	19.13	18.96	18.95	20	0
5	64QAM	12	13	19.03	18.91	18.91		
5	64QAM	25	0	19.04	18.97	18.93		
Channel				26055	26340	26675	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1913.5		
3	QPSK	1	0	18.67	18.30	18.47	20	0
3	QPSK	1	8	18.86	18.86	18.91		
3	QPSK	1	14	18.84	18.76	18.85		
3	QPSK	8	0	18.90	18.83	18.91	20	0
3	QPSK	8	4	18.94	18.85	18.96		
3	QPSK	8	7	18.85	18.79	18.88		
3	QPSK	15	0	19.00	18.81	18.95	20	0
3	16QAM	1	0	19.22	19.06	19.09		
3	16QAM	1	8	19.31	19.21	19.09		
3	16QAM	1	14	19.16	18.92	19.00	20	0
3	16QAM	8	0	19.12	18.89	18.96		
3	16QAM	8	4	19.12	18.91	19.04		
3	16QAM	8	7	19.07	18.87	18.95	20	0
3	16QAM	15	0	19.01	18.84	18.87		
3	64QAM	1	0	19.24	19.13	19.23		
3	64QAM	1	8	19.17	19.09	19.12	20	0
3	64QAM	1	14	19.15	18.96	19.04		
3	64QAM	8	0	19.19	18.91	18.89		
3	64QAM	8	4	19.15	18.95	18.89	20	0
3	64QAM	8	7	19.07	18.86	18.92		
3	64QAM	15	0	18.93	18.89	18.83		



Channel				26047	26340	26683	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1914.3		
1.4	QPSK	1	0	18.40	18.31	18.48	20	0
1.4	QPSK	1	3	18.75	18.69	18.78		
1.4	QPSK	1	5	18.83	18.63	18.70		
1.4	QPSK	3	0	18.89	18.75	18.70		
1.4	QPSK	3	1	18.95	18.69	18.69		
1.4	QPSK	3	3	18.90	18.65	18.76		
1.4	QPSK	6	0	18.87	18.65	18.70	20	0
1.4	16QAM	1	0	19.00	18.86	18.77	20	0
1.4	16QAM	1	3	19.18	18.86	19.09		
1.4	16QAM	1	5	19.03	18.97	18.97		
1.4	16QAM	3	0	18.89	18.75	18.79		
1.4	16QAM	3	1	18.98	18.87	18.89		
1.4	16QAM	3	3	18.82	18.71	18.86		
1.4	16QAM	6	0	19.00	18.76	18.90	20	0
1.4	64QAM	1	0	19.05	18.93	18.94	20	0
1.4	64QAM	1	3	19.11	18.95	18.96		
1.4	64QAM	1	5	18.99	18.88	19.00		
1.4	64QAM	3	0	18.88	18.82	18.82		
1.4	64QAM	3	1	19.03	18.83	18.87		
1.4	64QAM	3	3	18.91	18.75	18.82		
1.4	64QAM	6	0	18.86	18.75	18.77	20	0



<LTE Band 66>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572		
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	14.13	14.23	14.27	15.5	0
20	QPSK	1	49	14.25	14.44	14.42		
20	QPSK	1	99	14.71	14.76	14.44		
20	QPSK	50	0	14.43	14.56	14.36	15.5	0
20	QPSK	50	24	14.13	14.50	14.34		
20	QPSK	50	50	14.23	14.36	14.16		
20	QPSK	100	0	14.07	14.59	14.54		
20	16QAM	1	0	14.73	14.79	14.83	15.5	0
20	16QAM	1	49	14.69	14.73	14.61		
20	16QAM	1	99	14.92	15.03	14.69		
20	16QAM	50	0	14.19	14.43	14.22	15.5	0
20	16QAM	50	24	14.07	14.54	14.32		
20	16QAM	50	50	14.11	14.54	14.49		
20	16QAM	100	0	14.23	14.48	14.41		
20	64QAM	1	0	14.52	14.70	14.42	15.5	0
20	64QAM	1	49	14.15	14.48	14.33		
20	64QAM	1	99	14.65	14.90	14.82		
20	64QAM	50	0	14.18	14.43	14.33	15.5	0
20	64QAM	50	24	14.03	14.47	14.31		
20	64QAM	50	50	14.09	14.50	14.29		
20	64QAM	100	0	14.23	14.45	14.42		



FCC SAR Test Report

Report No. : FA922110

Channel				132047	132322	132597	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1745	1772.5		
15	QPSK	1	0	14.18	14.22	14.22	15.5	0
15	QPSK	1	37	14.24	14.40	14.06		
15	QPSK	1	74	14.63	14.75	14.57		
15	QPSK	36	0	14.13	14.50	14.34	15.5	0
15	QPSK	36	20	14.23	14.38	14.23		
15	QPSK	36	39	14.17	14.47	14.33		
15	QPSK	75	0	14.11	14.47	14.44	15.5	0
15	16QAM	1	0	14.76	14.91	14.89		
15	16QAM	1	37	14.43	14.58	14.72		
15	16QAM	1	74	14.86	15.16	14.76	15.5	0
15	16QAM	36	0	14.18	14.48	14.41		
15	16QAM	36	20	14.29	14.50	14.33		
15	16QAM	36	39	14.09	14.49	14.31	15.5	0
15	16QAM	75	0	14.15	14.51	14.31		
15	64QAM	1	0	14.54	14.74	14.75		
15	64QAM	1	37	14.71	14.71	14.28	15.5	0
15	64QAM	1	74	14.79	15.04	14.52		
15	64QAM	36	0	14.28	14.51	14.35		
15	64QAM	36	20	14.30	14.43	14.29	15.5	0
15	64QAM	36	39	14.23	14.43	14.39		
15	64QAM	75	0	14.17	14.51	14.28		
Channel				132022	132322	132622	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1745	1775		
10	QPSK	1	0	14.39	14.52	14.45	15.5	0
10	QPSK	1	25	14.29	14.45	14.41		
10	QPSK	1	49	14.57	14.79	14.49		
10	QPSK	25	0	14.40	14.48	14.44	15.5	0
10	QPSK	25	12	14.40	14.55	14.39		
10	QPSK	25	25	14.44	14.53	14.51		
10	QPSK	50	0	14.33	14.54	14.48	15.5	0
10	16QAM	1	0	14.83	15.09	14.92		
10	16QAM	1	25	14.71	14.81	14.74		
10	16QAM	1	49	15.02	15.11	14.92	15.5	0
10	16QAM	25	0	14.34	14.52	14.39		
10	16QAM	25	12	14.39	14.49	14.55		
10	16QAM	25	25	14.39	14.56	14.41	15.5	0
10	16QAM	50	0	14.37	14.58	14.42		
10	64QAM	1	0	14.63	14.79	14.83		
10	64QAM	1	25	14.45	14.69	14.51	15.5	0
10	64QAM	1	49	14.85	14.96	14.94		
10	64QAM	25	0	14.45	14.54	14.48		
10	64QAM	25	12	14.41	14.51	14.54	15.5	0
10	64QAM	25	25	14.42	14.58	14.42		
10	64QAM	50	0	14.37	14.61	14.45		



Channel				131997	132322	132647	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1745	1777.5		
5	QPSK	1	0	14.23	14.50	14.26	15.5	0
5	QPSK	1	12	14.20	14.44	14.25		
5	QPSK	1	24	14.36	14.51	14.33		
5	QPSK	12	0	14.35	14.47	14.45	15.5	0
5	QPSK	12	7	14.33	14.51	14.45		
5	QPSK	12	13	14.34	14.46	14.29		
5	QPSK	25	0	14.32	14.53	14.37		
5	16QAM	1	0	14.64	14.95	14.71	15.5	0
5	16QAM	1	12	14.34	14.88	14.39		
5	16QAM	1	24	14.44	14.87	14.65		
5	16QAM	12	0	14.38	14.50	14.52	15.5	0
5	16QAM	12	7	14.32	14.56	14.49		
5	16QAM	12	13	14.44	14.53	14.43		
5	16QAM	25	0	14.23	14.48	14.41		
5	64QAM	1	0	14.57	14.82	14.55	15.5	0
5	64QAM	1	12	14.32	14.65	14.63		
5	64QAM	1	24	14.37	14.68	14.53		
5	64QAM	12	0	14.30	14.50	14.51	15.5	0
5	64QAM	12	7	14.30	14.44	14.41		
5	64QAM	12	13	14.35	14.52	14.44		
5	64QAM	25	0	14.37	14.49	14.42		
Channel				131987	132322	132657	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1745	1778.5		
3	QPSK	1	0	14.31	14.37	14.21	15.5	0
3	QPSK	1	8	14.29	14.21	14.28		
3	QPSK	1	14	14.24	14.44	14.31		
3	QPSK	8	0	14.31	14.50	14.32	15.5	0
3	QPSK	8	4	14.29	14.46	14.37		
3	QPSK	8	7	14.29	14.37	14.27		
3	QPSK	15	0	14.25	14.44	14.33		
3	16QAM	1	0	14.55	14.67	14.57	15.5	0
3	16QAM	1	8	14.57	14.67	14.68		
3	16QAM	1	14	14.57	14.57	14.39		
3	16QAM	8	0	14.50	14.60	14.50	15.5	0
3	16QAM	8	4	14.38	14.54	14.46		
3	16QAM	8	7	14.40	14.46	14.44		
3	16QAM	15	0	14.30	14.48	14.37		
3	64QAM	1	0	14.32	14.53	14.80	15.5	0
3	64QAM	1	8	14.43	14.45	14.57		
3	64QAM	1	14	14.27	14.59	14.56		
3	64QAM	8	0	14.29	14.58	14.49	15.5	0
3	64QAM	8	4	14.27	14.54	14.43		
3	64QAM	8	7	14.28	14.41	14.38		
3	64QAM	15	0	14.30	14.50	14.38		



Channel				131979	132322	132665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1745	1779.3		
1.4	QPSK	1	0	14.20	14.35	14.20	15.5	0
1.4	QPSK	1	3	14.12	14.28	14.13		
1.4	QPSK	1	5	14.25	14.46	14.28		
1.4	QPSK	3	0	14.22	14.49	14.32		
1.4	QPSK	3	1	14.40	14.51	14.33		
1.4	QPSK	3	3	14.24	14.45	14.36		
1.4	QPSK	6	0	14.34	14.46	14.28	15.5	0
1.4	16QAM	1	0	14.36	14.65	14.71	15.5	0
1.4	16QAM	1	3	14.45	14.66	14.59		
1.4	16QAM	1	5	14.50	14.55	14.35		
1.4	16QAM	3	0	14.40	14.51	14.51		
1.4	16QAM	3	1	14.36	14.54	14.63		
1.4	16QAM	3	3	14.45	14.45	14.51		
1.4	16QAM	6	0	14.23	14.50	14.42	15.5	0
1.4	64QAM	1	0	14.41	14.63	14.39	15.5	0
1.4	64QAM	1	3	14.38	14.60	14.46		
1.4	64QAM	1	5	14.57	14.40	14.43		
1.4	64QAM	3	0	14.42	14.49	14.51		
1.4	64QAM	3	1	14.40	14.55	14.55		
1.4	64QAM	3	3	14.36	14.45	14.32		
1.4	64QAM	6	0	14.31	14.44	14.34	15.5	0



<Reduced Power Mode for Hotspot On>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	18.63	18.55	18.81	20	0
20	QPSK	1	49	18.75	18.71	19.14		
20	QPSK	1	99	18.84	19.12	18.97		
20	QPSK	50	0	18.92	18.90	18.89	20	0
20	QPSK	50	24	18.81	18.84	18.86		
20	QPSK	50	50	18.85	18.90	18.96		
20	QPSK	100	0	18.96	18.97	19.39		
20	16QAM	1	0	19.27	19.34	19.18	20	0
20	16QAM	1	49	18.97	19.20	19.36		
20	16QAM	1	99	19.30	19.49	18.95		
20	16QAM	50	0	18.98	18.90	18.90	20	0
20	16QAM	50	24	18.85	18.86	18.98		
20	16QAM	50	50	18.88	18.98	18.95		
20	16QAM	100	0	18.99	18.91	19.31		
20	64QAM	1	0	19.28	19.19	19.16	20	0
20	64QAM	1	49	19.00	18.96	19.26		
20	64QAM	1	99	19.13	19.38	18.92		
20	64QAM	50	0	18.86	18.91	18.89	20	0
20	64QAM	50	24	18.83	18.87	18.99		
20	64QAM	50	50	18.88	18.94	18.96		
20	64QAM	100	0	18.91	18.94	19.06		



FCC SAR Test Report

Report No. : FA922110

Channel				18675	17.57	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	18.52	18.31	18.49	20	0
15	QPSK	1	37	18.54	18.50	18.57		
15	QPSK	1	74	18.66	18.87	18.08		
15	QPSK	36	0	18.57	18.57	18.62	20	0
15	QPSK	36	20	18.50	18.43	18.56		
15	QPSK	36	39	18.50	18.59	18.55		
15	QPSK	75	0	18.53	18.58	18.69	20	0
15	16QAM	1	0	19.03	18.82	18.88		
15	16QAM	1	37	18.62	18.82	18.79		
15	16QAM	1	74	18.55	18.71	18.61	20	0
15	16QAM	36	0	18.57	18.57	18.57		
15	16QAM	36	20	18.56	18.46	18.58		
15	16QAM	36	39	18.56	18.56	18.51	20	0
15	16QAM	75	0	18.59	18.53	18.67		
15	64QAM	1	0	18.81	18.92	18.93		
15	64QAM	1	37	18.27	18.63	18.80	20	0
15	64QAM	1	74	18.44	18.63	18.60		
15	64QAM	36	0	18.76	18.53	18.59		
15	64QAM	36	20	18.60	18.49	18.65	20	0
15	64QAM	36	39	18.56	18.53	18.60		
15	64QAM	75	0	18.57	18.54	18.56		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	18.55	18.41	18.51	20	0
10	QPSK	1	25	18.82	18.67	18.73		
10	QPSK	1	49	19.05	18.99	19.01		
10	QPSK	25	0	18.84	18.79	18.82	20	0
10	QPSK	25	12	18.87	18.77	18.74		
10	QPSK	25	25	18.85	18.77	18.79		
10	QPSK	50	0	18.82	18.70	18.87	20	0
10	16QAM	1	0	19.36	19.30	19.30		
10	16QAM	1	25	19.05	18.93	18.92		
10	16QAM	1	49	19.36	19.24	19.23	20	0
10	16QAM	25	0	18.84	18.77	18.76		
10	16QAM	25	12	18.85	18.78	18.76		
10	16QAM	25	25	18.82	18.80	18.84	20	0
10	16QAM	50	0	18.91	18.81	18.82		
10	64QAM	1	0	19.24	19.15	19.10		
10	64QAM	1	25	18.94	18.81	18.88	20	0
10	64QAM	1	49	19.31	19.22	19.17		
10	64QAM	25	0	18.87	18.78	18.76		
10	64QAM	25	12	18.87	18.78	18.78	20	0
10	64QAM	25	25	18.85	18.82	18.84		
10	64QAM	50	0	18.79	18.72	18.74		



FCC SAR Test Report

Report No. : FA922110

Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	18.54	18.44	18.47	20	0
5	QPSK	1	12	18.95	18.85	18.82		
5	QPSK	1	24	18.98	18.92	18.87		
5	QPSK	12	0	19.08	18.97	19.02	20	0
5	QPSK	12	7	19.05	18.89	18.93		
5	QPSK	12	13	18.98	18.84	18.88		
5	QPSK	25	0	19	18.9	18.91	20	0
5	16QAM	1	0	19.39	19.3	19.14		
5	16QAM	1	12	19.12	19.02	19.17		
5	16QAM	1	24	19.17	19.07	19.09	20	0
5	16QAM	12	0	19.2	18.96	19.04		
5	16QAM	12	7	19.06	18.96	18.94		
5	16QAM	12	13	18.97	18.9	18.91	20	0
5	16QAM	25	0	18.99	18.97	18.92		
5	64QAM	1	0	19.21	19.16	19.09		
5	64QAM	1	12	19.09	19	18.98	20	0
5	64QAM	1	24	19.09	19	18.92		
5	64QAM	12	0	19.07	18.92	18.95		
5	64QAM	12	7	19.04	18.9	18.95	20	0
5	64QAM	12	13	18.96	18.81	18.9		
5	64QAM	25	0	18.99	18.9	18.94		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	18.62	18.74	18.47	20	0
3	QPSK	1	8	18.63	18.85	18.82		
3	QPSK	1	14	18.84	18.92	18.87		
3	QPSK	8	0	18.95	18.97	19.02	20	0
3	QPSK	8	4	18.96	18.89	18.93		
3	QPSK	8	7	18.97	18.84	18.88		
3	QPSK	15	0	18.98	18.90	18.91	20	0
3	16QAM	1	0	18.99	19.30	19.14		
3	16QAM	1	8	19.00	19.02	19.17		
3	16QAM	1	14	19.01	19.07	19.09	20	0
3	16QAM	8	0	19.02	18.96	19.04		
3	16QAM	8	4	19.03	18.96	18.94		
3	16QAM	8	7	19.04	18.90	18.91	20	0
3	16QAM	15	0	19.05	18.97	18.92		
3	64QAM	1	0	19.06	19.16	19.09		
3	64QAM	1	8	19.07	19.00	18.98	20	0
3	64QAM	1	14	19.08	19.00	18.92		
3	64QAM	8	0	19.09	18.92	18.95		
3	64QAM	8	4	19.10	18.90	18.95	20	0
3	64QAM	8	7	19.11	18.81	18.90		
3	64QAM	15	0	19.12	18.90	18.94		