



FCC RADIO TEST REPORT

FCC ID : IHDT56ZB2
Equipment : Mobile Cellular Phone
Brand Name : Motorola
Model Name : XT2071-4
Applicant : Motorola Mobility, LLC
222 W Merchandise Mart Plaza, Suite 1800,
Chicago, IL 60654, United States
Manufacturer : Motorola Mobility, LLC
222 W Merchandise Mart Plaza, Suite 1800,
Chicago, IL 60654, United States
Standard : FCC 47 CFR Part 2, 22(H), 27

The product was received on May 12, 2020 and testing was started from May 30, 2020 and completed on Jul. 01, 2020. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	7
1.3 Modification of EUT	7
1.4 Testing Location	8
1.5 Applicable Standards.....	9
2 Test Configuration of Equipment Under Test	10
2.1 Test Mode.....	10
2.2 Connection Diagram of Test System.....	12
2.3 Support Unit used in test configuration and system	12
2.4 Measurement Results Explanation Example.....	12
2.5 Frequency List of Low/Middle/High Channels	13
3 Conducted Test Items.....	14
3.1 Measuring Instruments	14
3.2 Conducted Output Power and ERP/EIRP	15
3.3 Peak-to-Average Ratio	16
3.4 Occupied Bandwidth.....	17
3.5 Conducted Band Edge	18
3.6 Conducted Spurious Emission	19
3.7 Frequency Stability	20
4 Radiated Test Items	21
4.1 Measuring Instruments	21
4.2 Radiated Spurious Emission Measurement	23
5 List of Measuring Equipment.....	24
6 Uncertainty of Evaluation.....	26
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of ERP/EIRP and Radiated Test	



History of this test report

Report No.	Version	Description	Issued Date
FG051232C	01	Initial issue of report	Jul. 29, 2020
FG051232C	02	Revise test data	Sep. 02, 2020



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Reporting only	-
	§22.913 (a)(2)	Effective Radiated Power (n5)	Pass	
	§27.50 (h)(2)	Equivalent Isotropic Radiated Power (n41)		
3.3	-	Peak-to-Average Ratio	Reporting only	-
3.4	§2.1049	Occupied Bandwidth	Reporting only	-
3.5	§2.1051 §22.917 (a)	Conducted Band Edge Measurement (n5)	Pass	-
	§2.1051 §27.53 (m)(4)	Conducted Band Edge Measurement (n41)		
3.6	§2.1051 §22.917 (a)	Conducted Spurious Emission (n5)	Pass	-
	§2.1051 §27.53 (m)(4)	Conducted Spurious Emission (n41)		
3.7	§2.1055 §22.355 §27.54	Frequency Stability Temperature & Voltage	Pass	-
4.2	§2.1053 §22.917 (a)	Radiated Spurious Emission (n5)	Pass	Under limit 18.95 dB at 10368.000 MHz for PT Antenna Under limit 24.99 dB at 3301.000 MHz for ASDIV Antenna
	§2.1051 §27.53 (m)(4)	Radiated Spurious Emission (n41)		

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Vivian Hsu



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2071-4
FCC ID	IHDT56ZB2
IMEI Code	Conducted : IMEI 1: 351648110010916 IMEI 2: 351648110010924 Radiation : IMEI 1: 351648110008993 IMEI 2: 351648110009009
EUT supports Radios application	CDMA/EV-DO/GSM/EGPRS/WCDMA/HSPA/LTE/5G NR/ GNSS/NFC WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE
HW Version	DVT2
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer.



Accessory List	
AC Adapter 1 (US)	Brand Name : Motorola
	Model Name : SC-51
	Manufacturer : Chenyang
AC Adapter 1 (EU)	Brand Name : Motorola
	Model Name : SC-52
	Manufacturer : Chenyang
AC Adapter 1 (UK)	Brand Name : Motorola
	Model Name : SC-53UK
	Manufacturer : Chenyang
AC Adapter 1 (AR)	Brand Name : Motorola
	Model Name : SC-56
	Manufacturer : Chenyang
AC Adapter 1 (AU)	Brand Name : Motorola
	Model Name : SC-55AU
	Manufacturer : Chenyang
AC Adapter 2 (US)	Brand Name : Motorola
	Model Name : SC-51
	Manufacturer : Acbel
AC Adapter 2 (EU)	Brand Name : Motorola
	Model Name : SC-52
	Manufacturer : Acbel
AC Adapter 2 (AR)	Brand Name : Motorola
	Model Name : SC-56
	Manufacturer : Acbel
AC Adapter 3 (IN)	Brand Name : Motorola
	Model Name : SC-54
	Manufacturer : Salom
Battery 1	Brand Name : Motorola
	Model Name : LS30
	Manufacturer : ATL
Battery 2	Brand Name : Motorola
	Model Name : LS40
	Manufacturer : ATL
Standard 3.5mm Headset 1	Brand Name : Motorola
	Model Name : SH38C37773
	Manufacturer : Lianyun
Standard 3.5mm Headset 2	Brand Name : Motorola
	Model Name : SH38C44959
	Manufacturer : Lianyun
USB-C to 3.5mm headset adaptor 1	Brand Name : Motorola
	Model Name : SC18C27844
USB-C to 3.5mm headset adaptor 2	Brand Name : Motorola
	Model Name : SC18C27845
USB Cable 1	Brand Name : Motorola
	Model Name : SC18C24367
	Manufacturer : Saibao
USB Cable 2	Brand Name : Motorola
	Model Name : SC18C24368
	Manufacturer : Luxshare



1.2 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	5G NR n5: 826.5 MHz ~ 846.5 MHz 5G NR n41: 2506.02 MHz ~ 2679.99 MHz
Rx Frequency	5G NR n5: 871.5 MHz ~ 891.5 MHz 5G NR n41: 2506.02 MHz ~ 2679.99 MHz
Bandwidth	5G NR n5: 5MHz / 10MHz / 15MHz / 20MHz 5G NR n41: 20MHz / 40MHz / 50MHz / 60MHz / 80MHz / 90MHz / 100MHz
Maximum Output Power to Antenna	<PT Antenna> <Ant. 1+2> 5G NR n5 : 23.61 dBm 5G NR n41 : 24.00 dBm <ASDIV Antenna> < Ant. 1+2> 5G NR n5 : 24.00 dBm
Antenna Type	Fixed Internal Antenna
Type of Modulation	PI/2 BPSK / QPSK / 16QAM / 64QAM

1.3 Modification of EUT

No modifications are made to the EUT during all test items.



1.4 Testing Location

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. TH05-HY
Test Engineer	George Chen
Temperature	23~26°C
Relative Humidity	55~58%

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. 03CH11-HY
Test Engineer	Cookie Ku, Fu Chen and Troye Hsieh
Temperature	19.1~26.4°C
Relative Humidity	50~68.9%

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW0007



1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ FCC 47 CFR Part 2, 22(H), 27
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.
3. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.


For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z and Accessory (Earphone or Adapter). The worst cases (Open Mode with PT Antenna: Y plane for for 5G NR n5 and X Plane for for 5G NR n41) were recorded in this report.

Test Items	NR Band	Bandwidth (MHz)						Modulation					RB #			Test Channel		
		5	10	15	20	40	50	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H
Max. Output Power	n5	v	v	v	v	-	-	v	v	v	v		v	v	v	v	v	v
Peak-to-Average Ratio	n5				v	-	-	v	v	v	v		v		v	v	v	
26dB and 99% Bandwidth	n5	v	v	v	v	-	-	v	v	v	v				v	v	v	
Conducted Band Edge	n5	v	v	v	v	-	-	v	v	v	v		v		v	v	v	
Conducted Spurious Emission	n5	v	v	v	v	-	-	v	v	v	v		v			v	v	
Frequency Stability	n5				v	-	-		v						v		v	
E.R.P / E.I.R.P	n5	v	v	v	v	-	-	v	v	v	v		v			v	v	
Radiated Spurious Emission	n5	Worst Case														v	v	v
Remark	<ol style="list-style-type: none"> The mark "v" means that this configuration is chosen for testing The mark "-" means that this bandwidth is not supported. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. Test combination is EN-DC 7A-n5A. For radiated measurement, pre-scanned in two modes, DFT-s OFDM and CP OFDM. The worst cases (DFT-s OFDM) were recorded in this report. All the radiated test cases were performed with AC Adapter 1 (US), USB Cable 1, and SIM 1. 																	



Test Items	NR Band	Bandwidth (MHz)									Modulation					RB #			Test Channel		
		10	15	20	40	50	60	80	90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H
Max. Output Power	n41			v	v	v	v	v	v	v	v	v	v	v		v	v	v	v	v	v
Peak-to-Average Ratio	n41			v							v	v	v	v		v		v	v	v	v
26dB and 99% Bandwidth	n41			v	v	v	v	v	v	v	v	v	v	v				v	v	v	v
Conducted Band Edge	n41			v	v	v	v	v	v	v	v	v	v	v		v		v	v		v
Conducted Spurious Emission	n41			v	v	v	v	v	v	v	v	v	v	v		v			v	v	v
Frequency Stability	n41			v														v		v	
E.R.P / E.I.R.P	n41			v	v	v	v	v	v	v	v	v	v	v		v			v	v	v
Radiated Spurious Emission	n41	Worst Case																	v	v	v
Remark	<ol style="list-style-type: none"> The mark "v" means that this configuration is chosen for testing The mark "-" means that this bandwidth is not supported. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. Test combination is EN-DC 41-n41. For radiated measurement, pre-scanned in two modes, DFT-s OFDM and CP OFDM. The worst cases (DFT-s OFDM) were recorded in this report. All the radiated test cases were performed with AC Adapter 1 (US), USB Cable 1, and SIM 1. 																				

2.2 Connection Diagram of Test System

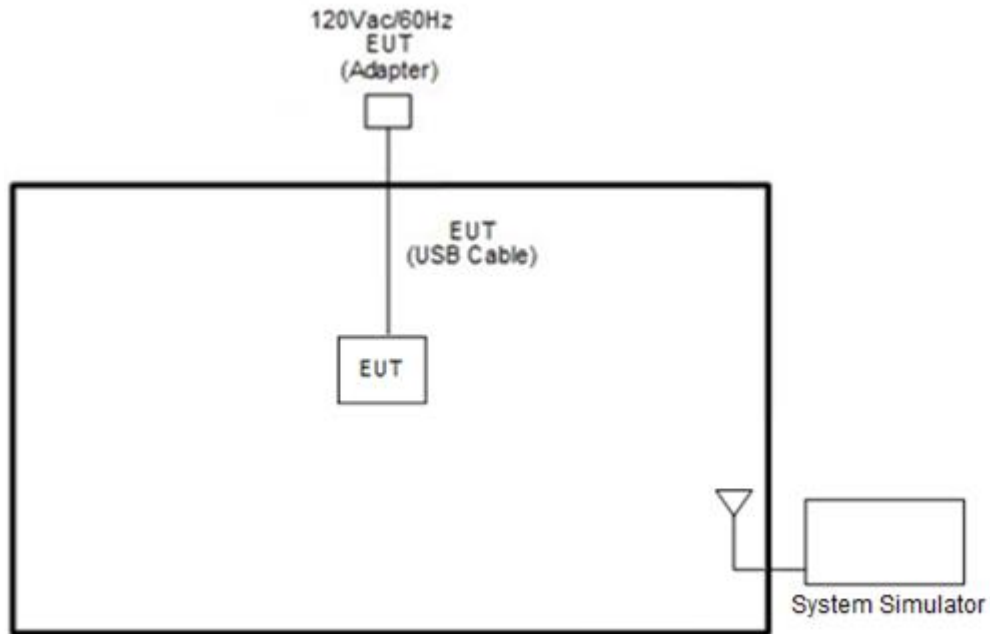

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

5G NR Band n5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	166800	167300	167800
	Frequency	834	836.5	839
15	Channel	166300	167300	168300
	Frequency	831.5	836.5	841.5
10	Channel	165800	167300	168800
	Frequency	829	836.5	844
5	Channel	165300	167300	169300
	Frequency	826.5	836.5	846.5

5G NR Band n41 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	509202	518598	528000
	Frequency	2546.01	2592.99	2640
90	Channel	508200	518598	528996
	Frequency	2541	2592.99	2644.98
80	Channel	507204	518598	529998
	Frequency	2536.02	2592.99	2649.99
60	Channel	505200	518598	531996
	Frequency	2526	2592.99	2659.98
50	Channel	504204	518598	532998
	Frequency	2521.02	2592.99	2664.99
40	Channel	503202	518598	534000
	Frequency	2516.01	2592.99	2670
20	Channel	501204	518598	535998
	Frequency	2506.02	2592.99	2679.99


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power

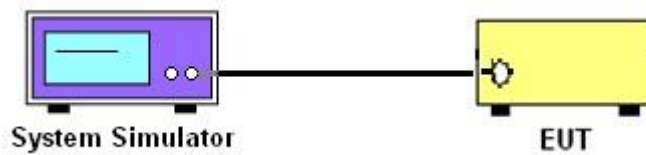

3.1.3 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

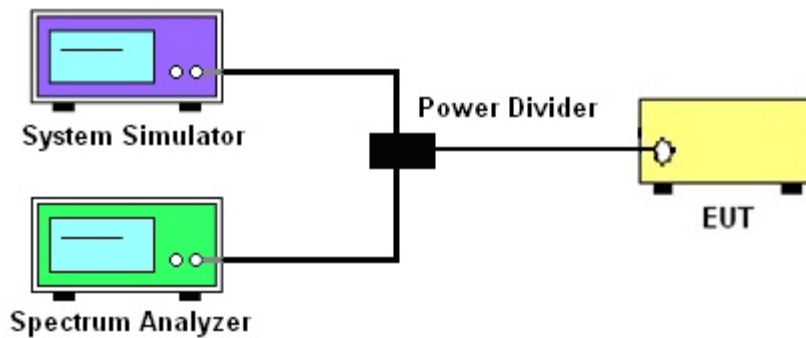

3.1.4 Frequency Stability

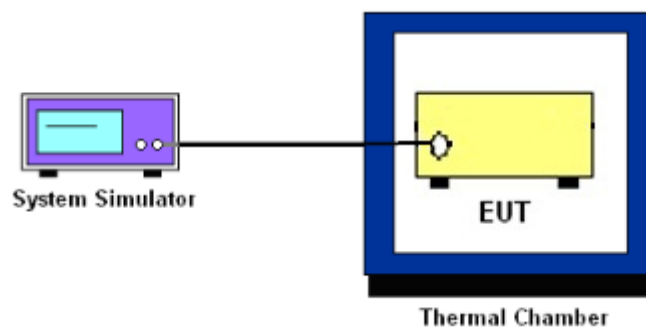

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power and ERP/EIRP

3.2.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for 5G NR n5

The EIRP of mobile transmitters must not exceed 2 Watts for 5G NR n41

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.



3.4 Occupied Bandwidth

3.4.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53(m)(4)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. Set RBW \geq 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
5. Set spectrum analyzer with RMS detector.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. Checked that all the results comply with the emission limit line.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power $P(\text{Watts})$

For 5G NR n41

The other 40 dB, and 55 dB have additionally applied same calculation above.



3.6 Conducted Spurious Emission

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For 5G NR n41

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
6. Set spectrum analyzer with RMS detector.
7. Taking the record of maximum spurious emission.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
For 5G NR n41
The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)



3.7 Frequency Stability

3.7.1 Description of Frequency Stability Measurement

22.355

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.1.1 Test Setup


For radiated emissions below 30MHz

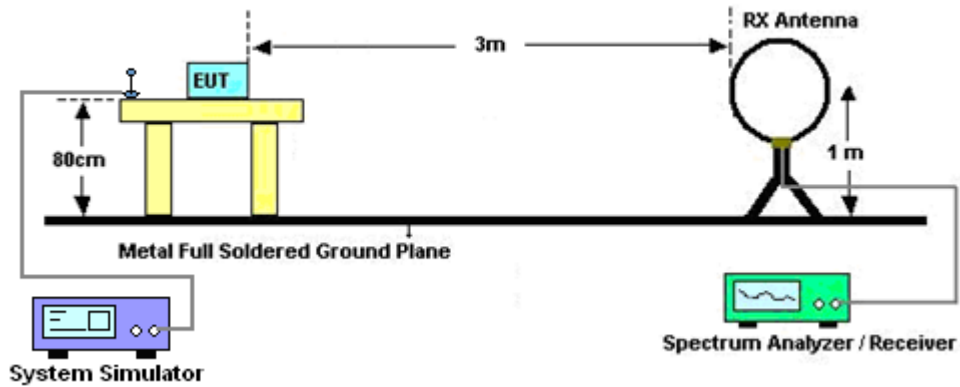

For radiated test from 30MHz to 1GHz

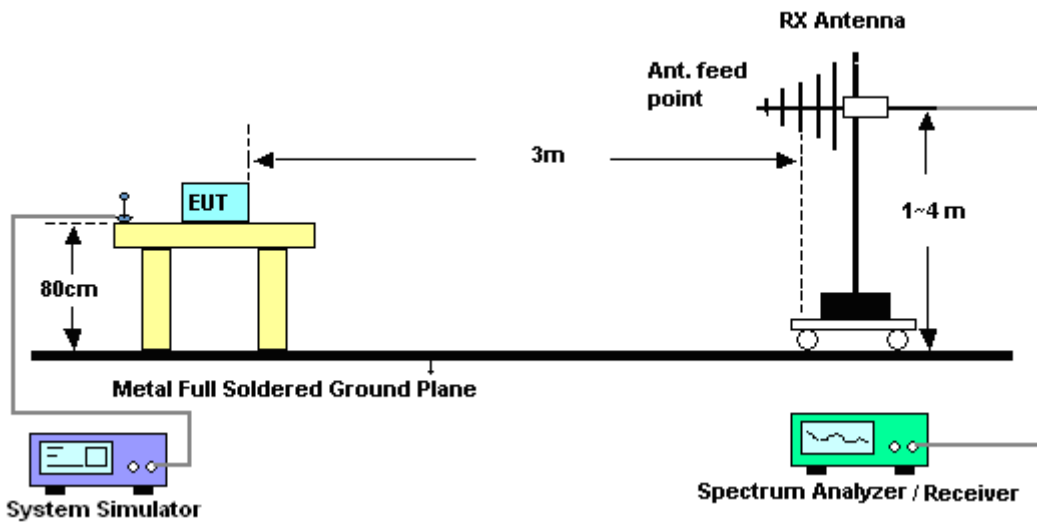

For radiated test above 1GHz

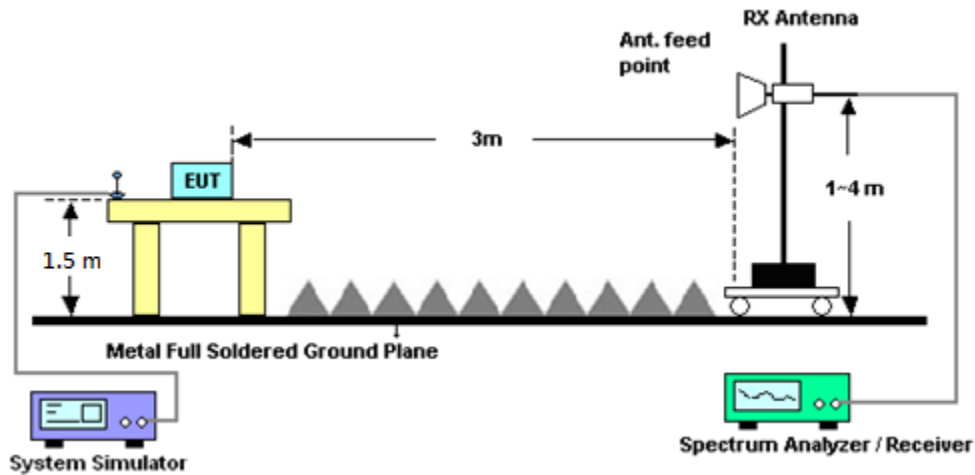

4.1.2 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



4.2 Radiated Spurious Emission Measurement

4.2.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For 5G NR n41

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.2.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

For 5G NR n41

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)

EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain

ERP (dBm) = EIRP - 2.15



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Radio Communication Analyzer	Anritsu	MT8821C	6261849015	N/A	Jul. 09, 2019	Jun. 17, 2020~ Jul. 01, 2020	Jul. 08, 2020	Conducted (TH05-HY)
5G Wireless Test Platform	Anritsu	MT8000A	6262012917	N/A	Jan. 20, 2020	Jun. 17, 2020~ Jul. 01, 2020	Jan. 19, 2021	Conducted (TH05-HY)
5G Wireless Test Platform	Keysight	E7515B	MY59321821	FR1	Feb. 14, 2020	Jun. 17, 2020~ Jul. 01, 2020	Feb. 13, 2021	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV30	101749	10Hz~30GHz	Jan. 10, 2020	Jun. 17, 2020~ Jul. 01, 2020	Jan. 09, 2021	Conducted (TH05-HY)
DC Power Supply	GW Instek	GPE-2323	GET910896	0V~64V;0A~6A	Feb. 15, 2020	Jun. 17, 2020~ Jul. 01, 2020	Feb. 14, 2021	Conducted (TH05-HY)
Temperature Chamber	ESPEC	SH-641	92013720	-40℃~90℃	Sep. 02, 2019	Jun. 17, 2020~ Jul. 01, 2020	Sep. 01, 2020	Conducted (TH05-HY)
Coupler	Warison	20dB 25W SMA Directional Coupler	#A	1-18GHz	Jan. 12, 2021	Jun. 17, 2020~ Jul. 01, 2020	Jan. 11, 2022	Conducted (TH05-HY)
Preamplifier	EMCE	EMC184045B	980192	18GHz ~ 40GHz	Aug. 01, 2019	May 30, 2020~ Jun. 23, 2020	Jul. 31, 2020	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Dec. 03, 2019	May 30, 2020~ Jun. 23, 2020	Dec. 02, 2020	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D & N-6-06	35414 & AT-N0602	30MHz~1GHz	Oct. 12, 2019	May 30, 2020~ Jun. 23, 2020	Oct. 11, 2020	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1326	1GHz ~ 18GHz	Nov. 04, 2019	May 30, 2020~ Jun. 23, 2020	Nov. 03, 2020	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Jan. 09, 2020	May 30, 2020~ Jun. 23, 2020	Jan. 08, 2021	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Nov. 13, 2019	May 30, 2020~ Jun. 23, 2020	Nov. 12, 2020	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz ~ 44GHz	Oct. 28, 2019	May 30, 2020~ Jun. 23, 2020	Oct. 27, 2020	Radiation (03CH11-HY)
Filter	Wainwright	WLK4-1000-1530-8000-40SS	SN11	1.53G Low Pass	Sep. 15, 2019	May 30, 2020~ Jun. 23, 2020	Sep. 14, 2020	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-2700-3000-18000-60SS	SN3	3GHz High Pass	Sep. 15, 2019	May 30, 2020~ Jun. 23, 2020	Sep. 14, 2020	Radiation (03CH11-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	May 30, 2020~ Jun. 23, 2020	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	May 30, 2020~ Jun. 23, 2020	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	May 30, 2020~ Jun. 23, 2020	N/A	Radiation (03CH11-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY53290045	20MHz~8.4GHz	Jan. 19, 2019	May 30, 2020~ Jun. 23, 2020	Jan. 18, 2020	Radiation (03CH11-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Software	Audix	E3 6.2009-8-24	RK-001042	N/A	N/A	May 30, 2020~ Jun. 23, 2020	N/A	Radiation (03CH11-HY)
Hygrometer	TECPEL	DTN-303B	TP161237	N/A	Oct. 25, 2019	May 30, 2020~ Jun. 23, 2020	Oct. 24, 2020	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	9kHz-30MHz	Mar. 12, 2020	May 30, 2020~ Jun. 23, 2020	Mar. 11, 2021	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz-40GHz	Mar. 12, 2020	May 30, 2020~ Jun. 23, 2020	Mar. 11, 2021	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	30M-18G	Mar. 12, 2020	May 30, 2020~ Jun. 23, 2020	Mar. 11, 2021	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY4274/2	30MHz-40GHz	Mar. 12, 2020	May 30, 2020~ Jun. 23, 2020	Mar. 11, 2021	Radiation (03CH11-HY)
Hygrometer	TECPEL	DTN-303B	TP140325	N/A	Nov. 07, 2019	May 30, 2020~ Jun. 23, 2020	Nov. 06, 2020	Radiation (03CH11-HY)
SMB100A Signal Generator	R&S	SMB100A	181147	100kHz~40GHz	Nov. 12, 2018	May 30, 2020~ Jun. 23, 2020	Nov. 11, 2020	Radiation (03CH11-HY)



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.09
---	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.44
---	------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.95
---	------



Appendix A. Test Results of Conducted Test

<PT Antenna>

<DFT-s-OFDM>

NR n5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	1	PI/2 BPSK	23.23	23.24	23.29
5	1	23		23.22	23.23	23.00
5	12	6		23.30	23.29	23.20
5	1	0		22.68	22.58	22.65
5	1	24		22.55	22.61	22.41
5	25	0		22.62	22.66	22.52
5	1	1	QPSK	23.22	23.09	23.12
5	1	23		23.11	23.20	23.00
5	12	6		23.25	23.30	23.15
5	1	0		22.25	22.13	22.04
5	1	24		22.04	22.12	21.91
5	25	0		22.18	22.10	21.98
5	1	1	16-QAM	22.31	22.16	22.27
5	1	1	64-QAM	20.62	20.48	20.49

NR n5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	1	PI/2 BPSK	23.46	23.52	23.53
10	1	50		23.38	23.47	23.28
10	25	12		23.50	23.53	23.54
10	1	0		22.95	22.90	22.88
10	1	51		22.76	22.87	22.71
10	50	0		22.86	23.00	22.82
10	1	1	QPSK	23.16	23.40	23.45
10	1	50		23.22	23.40	23.18
10	25	12		23.45	23.53	23.44
10	1	0		22.37	22.45	22.42
10	1	51		22.28	22.40	22.26
10	50	0		22.30	22.42	22.36
10	1	1	16-QAM	22.19	22.22	22.23
10	1	1	64-QAM	20.96	20.95	20.91



NR n5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	1	PI/2 BPSK	23.61	23.57	23.54
15	1	77		23.55	23.54	23.42
15	36	18		23.48	23.50	23.51
15	1	0		23.03	22.92	22.90
15	1	78		23.00	22.97	22.85
15	75	0		22.90	23.04	22.91
15	1	1	QPSK	23.18	23.51	23.43
15	1	77		23.49	23.50	23.33
15	36	18		23.45	23.50	23.46
15	1	0		22.44	22.34	22.27
15	1	78		22.45	22.42	22.23
15	75	0		22.42	22.47	22.42
15	1	1	16-QAM	22.27	22.20	22.22
15	1	1	64-QAM	20.98	20.99	20.91

NR n5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	1	PI/2 BPSK	23.60	23.56	23.61
20	1	104		23.45	23.49	23.40
20	50	25		23.50	23.38	23.30
20	1	0		22.91	22.96	23.00
20	1	105		22.85	22.93	22.83
20	100	0		22.99	23.04	23.00
20	1	1	QPSK	23.44	23.45	23.38
20	1	104		23.35	23.47	23.32
20	50	25		23.53	23.56	23.51
20	1	0		22.40	22.51	22.20
20	1	105		22.34	22.44	22.36
20	100	0		22.42	22.52	22.47
20	1	1	16-QAM	22.25	22.21	22.22
20	1	1	64-QAM	20.93	20.98	20.86



EN-DC_41A_n41A Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	1	PI/2 BPSK	23.26	23.30	23.22
20	1	49		23.37	23.64	22.49
20	25	12		23.35	23.56	23.04
20	1	0		22.80	22.98	22.63
20	1	50		22.85	23.17	22.38
20	50	0		22.89	22.06	22.58
20	1	1	QPSK	23.21	23.18	22.94
20	1	49		23.34	23.52	22.11
20	25	12		23.32	23.51	23.08
20	1	0		22.31	22.26	21.96
20	1	50		22.35	22.53	21.10
20	50	0		22.37	22.52	22.05
20	1	1	16-QAM	22.36	22.31	21.93
20	1	1	64-QAM	21.01	20.90	20.49

EN-DC_41A_n41A Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
40	1	1	PI/2 BPSK	23.49	23.04	23.70
40	1	104		23.65	23.78	22.18
40	50	25		23.54	23.50	23.44
40	1	0		23.01	22.91	23.22
40	1	105		23.13	23.23	22.13
40	100	0		23.11	23.14	22.93
40	1	1	QPSK	23.44	23.11	23.58
40	1	104		23.60	23.65	22.26
40	50	25		23.62	23.47	23.41
40	1	0		22.53	22.18	22.62
40	1	105		22.64	22.75	21.28
40	100	0		22.72	22.56	22.50
40	1	1	16-QAM	22.56	22.08	22.65
40	1	1	64-QAM	21.35	21.11	21.29



EN-DC_41A_n41A Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
50	1	1	PI/2 BPSK	23.33	23.14	23.60
50	1	131		23.45	23.59	22.69
50	64	32		23.47	23.31	23.32
50	1	0		22.84	22.64	23.11
50	1	132		22.93	23.11	22.54
50	128	0		22.95	22.77	22.79
50	1	1	QPSK	23.25	23.03	23.51
50	1	131		23.27	23.60	22.64
50	64	32		23.44	23.37	23.28
50	1	0		22.33	22.09	22.56
50	1	132		22.36	22.61	21.95
50	128	0		22.45	22.36	22.27
50	1	1	16-QAM	22.34	21.99	22.60
50	1	1	64-QAM	20.97	20.74	21.14

EN-DC_41A_n41A Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
60	1	1	PI/2 BPSK	23.28	23.06	23.50
60	1	160		23.34	23.69	22.86
60	81	40		23.43	23.41	23.37
60	1	0		22.77	22.55	22.94
60	1	161		22.79	23.13	22.43
60	162	0		22.97	22.91	22.88
60	1	1	QPSK	23.15	22.96	23.41
60	1	160		23.24	23.59	22.58
60	81	40		23.42	23.36	23.37
60	1	0		22.15	21.96	22.42
60	1	161		22.28	22.58	21.64
60	162	0		22.49	22.43	22.39
60	1	1	16-QAM	22.15	21.96	22.42
60	1	1	64-QAM	20.88	20.66	21.09



EN-DC_41A_n41A Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
80	1	1	PI/2 BPSK	22.56	23.19	23.61
80	1	215		22.03	23.62	22.81
80	108	54		23.60	23.47	23.51
80	1	0		21.95	22.61	23.10
80	1	216		21.84	23.09	22.59
80	216	0		22.65	22.95	23.03
80	1	1	QPSK	22.35	23.08	23.54
80	1	215		22.03	23.49	22.68
80	108	54		23.48	23.44	23.52
80	1	0		21.41	22.05	22.56
80	1	216		21.27	22.54	21.70
80	216	0		22.11	22.47	22.47
80	1	1	16-QAM	21.31	22.49	22.51
80	1	1	64-QAM	20.35	20.84	21.01

EN-DC_41A_n41A Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
90	1	1	PI/2 BPSK	23.16	23.19	23.49
90	1	243		23.24	22.89	22.68
90	120	60		23.46	24.00	23.50
90	1	0		22.58	23.51	22.82
90	1	244		22.61	22.17	22.25
90	240	0		22.83	23.45	22.94
90	1	1	QPSK	23.08	23.15	23.34
90	1	243		23.01	22.80	22.56
90	120	60		23.33	23.91	23.50
90	1	0		21.08	22.99	22.26
90	1	244		22.14	21.72	21.30
90	240	0		22.32	23.01	22.48
90	1	1	16-QAM	22.50	22.49	22.40
90	1	1	64-QAM	20.84	20.58	19.56



EN-DC_41A_n41A Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
100	1	1	PI/2 BPSK	23.39	23.79	23.99
100	1	271		23.12	23.93	23.23
100	135	67		23.23	23.96	23.99
100	1	0		22.77	23.12	23.37
100	1	272		22.60	23.52	22.86
100	270	0		22.92	23.50	23.50
100	1	1	QPSK	22.93	23.73	23.93
100	1	271		23.07	23.93	23.12
100	135	67		23.22	23.99	23.96
100	1	0		22.27	22.48	22.75
100	1	272		22.01	22.95	22.01
100	270	0		22.33	22.96	23.00
100	1	1	16-QAM	22.19	22.96	23.01
100	1	1	64-QAM	20.88	21.10	21.20



<ASVID Antenna>
<DFT-s-OFDM>

NR n5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	1	PI/2 BPSK	23.48	23.67	23.90
5	1	23		23.86	22.97	23.58
5	12	6		23.93	23.16	23.94
5	1	0		23.23	23.45	23.41
5	1	24		23.39	22.53	23.10
5	25	0		23.36	22.80	22.98
5	1	1	QPSK	23.40	23.62	23.83
5	1	23		23.88	22.94	23.40
5	12	6		23.64	23.17	23.85
5	1	0		22.47	22.94	22.87
5	1	24		22.90	22.07	22.44
5	25	0		22.77	22.11	22.81
5	1	1	16-QAM	22.34	22.57	22.80
5	1	1	64-QAM	21.00	21.28	21.49

NR n5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	1	PI/2 BPSK	23.30	23.90	22.94
10	1	50		23.86	23.12	23.44
10	25	12		23.96	23.54	23.79
10	1	0		23.03	23.49	22.61
10	1	51		23.32	22.69	23.18
10	50	0		23.49	22.74	22.79
10	1	1	QPSK	23.64	23.88	23.06
10	1	50		23.73	23.01	23.69
10	25	12		23.91	23.20	23.47
10	1	0		22.99	22.94	22.79
10	1	51		22.81	22.90	22.86
10	50	0		22.84	22.21	22.69
10	1	1	16-QAM	22.38	22.79	21.75
10	1	1	64-QAM	21.49	21.45	21.48



NR n5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	1	PI/2 BPSK	23.50	23.99	23.87
15	1	77		23.06	23.43	23.60
15	36	18		23.65	23.92	23.64
15	1	0		23.10	23.47	23.36
15	1	78		22.66	23.17	23.15
15	75	0		22.09	23.43	23.49
15	1	1	QPSK	23.45	23.96	23.85
15	1	77		23.01	23.48	23.54
15	36	18		23.84	23.25	23.08
15	1	0		22.94	22.93	22.78
15	1	78		22.74	22.63	22.75
15	75	0		22.96	22.85	22.47
15	1	1	16-QAM	22.38	22.78	22.77
15	1	1	64-QAM	21.50	21.40	21.47

NR n5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	1	PI/2 BPSK	23.49	23.97	24.00
20	1	104		23.52	23.88	23.73
20	50	25		22.24	22.40	22.77
20	1	0		23.03	23.41	23.47
20	1	105		23.06	23.44	23.18
20	100	0		22.24	22.14	23.49
20	1	1	QPSK	23.92	23.98	23.86
20	1	104		23.90	23.81	23.42
20	50	25		23.99	23.41	23.01
20	1	0		22.98	22.95	22.93
20	1	105		22.96	22.92	22.99
20	100	0		22.99	22.91	22.38
20	1	1	16-QAM	22.54	22.90	22.80
20	1	1	64-QAM	21.49	21.49	21.49



FR1 n5

Peak-to-Average Ratio

Mode	FR1 n5 / 20MHz / DFT-S OFDM				
Mod.	PI/2 BPSK	QPSK	16QAM	64QAM	Limit: 13dB
RB Size	Full RB	Full RB	Full RB	Full RB	Result
Lowest CH	3.57	4.49	5.59	6.03	PASS
Middle CH	3.83	4.55	5.68	6.06	
Highest CH	3.88	4.58	5.62	6.06	





FR1 n5 / 20MHz / DFT-S OFDM

PI/2 BPSK

QPSK

Lowest Channel / Full RB

Lowest Channel / Full RB

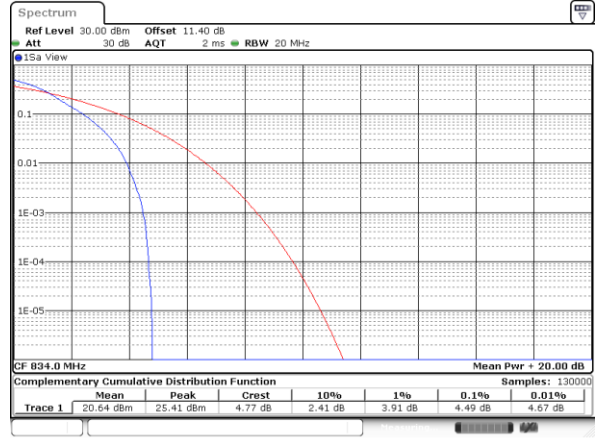
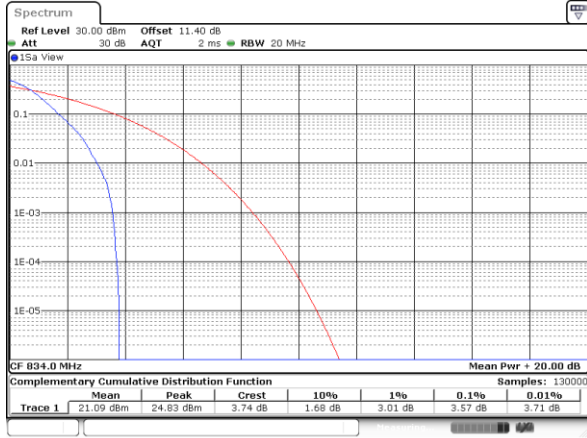


Date: 29_JUN,2020 15:03:29

Date: 29_JUN,2020 15:05:35

Middle Channel / Full RB

Middle Channel / Full RB

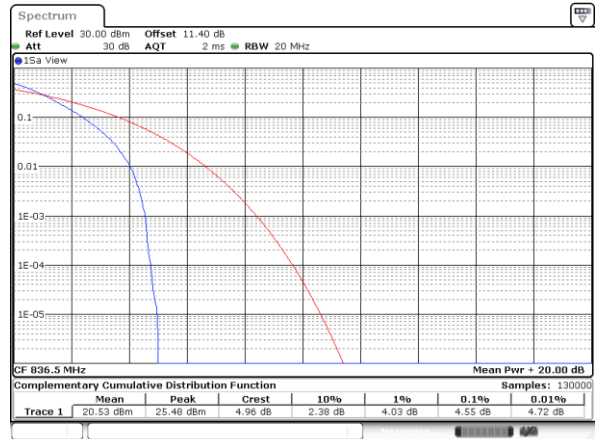
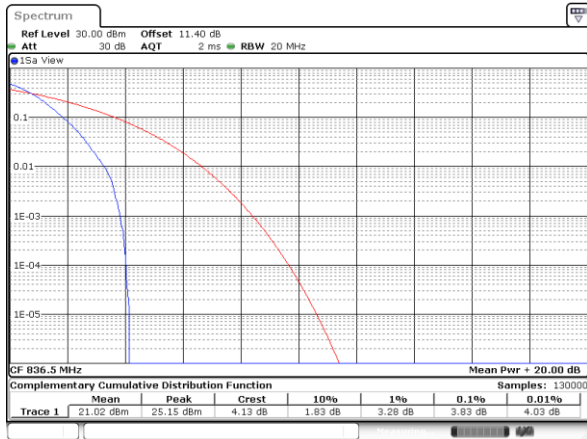


Date: 29_JUN,2020 15:20:17

Date: 29_JUN,2020 15:19:56

Highest Channel / Full RB

Highest Channel / Full RB

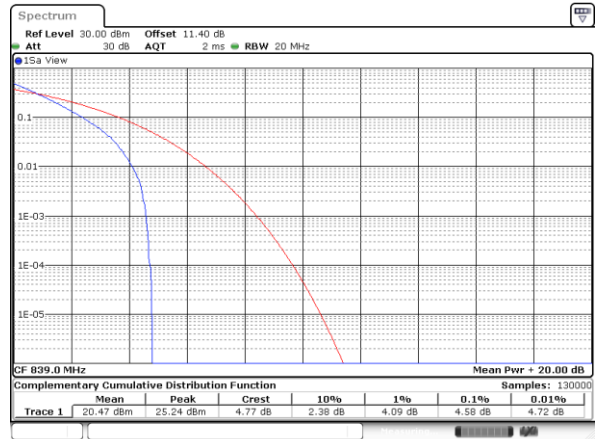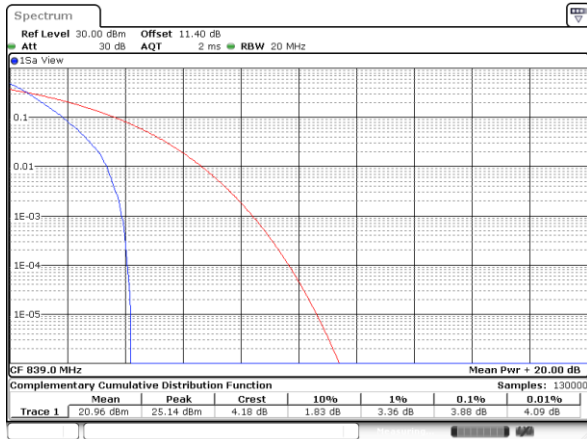

Date: 29_JUN,2020 15:26:25

Date: 29_JUN,2020 15:25:37





FR1 n5 / 20MHz / DFT-S OFDM

16QAM

64QAM

Lowest Channel / Full RB

Lowest Channel / Full RB

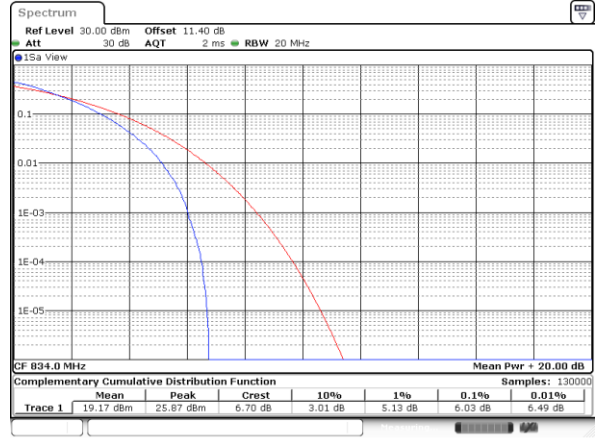
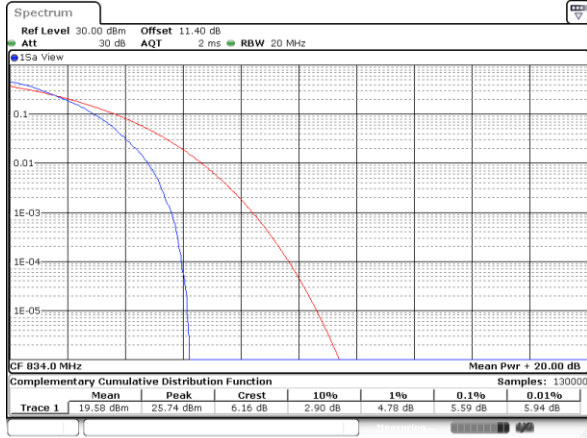


Date: 29_JUN.2020 15:06:47

Date: 29_JUN.2020 15:07:41

Middle Channel / Full RB

Middle Channel / Full RB

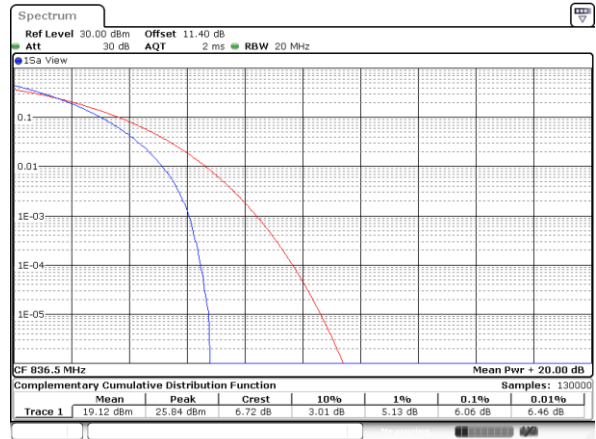
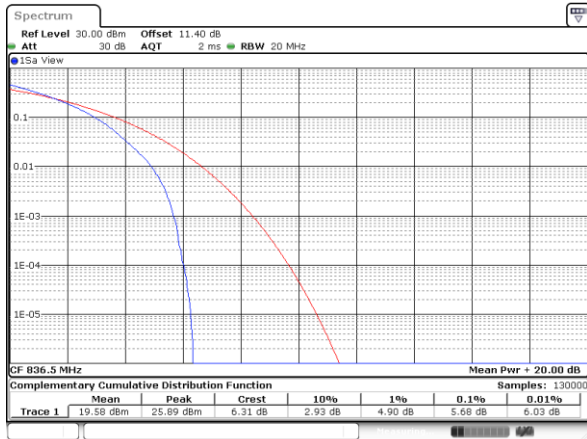


Date: 29_JUN.2020 15:21:22

Date: 29_JUN.2020 15:21:33

Highest Channel / Full RB

Highest Channel / Full RB

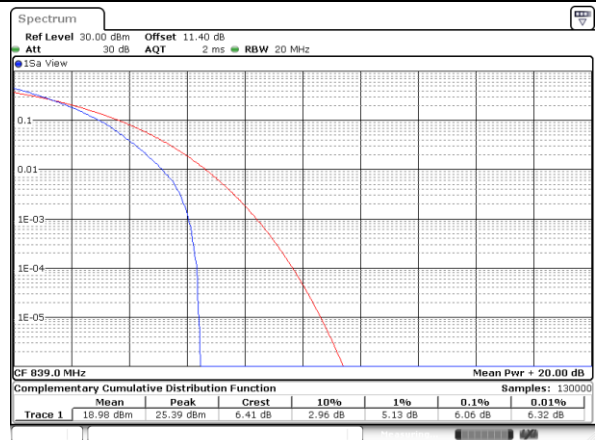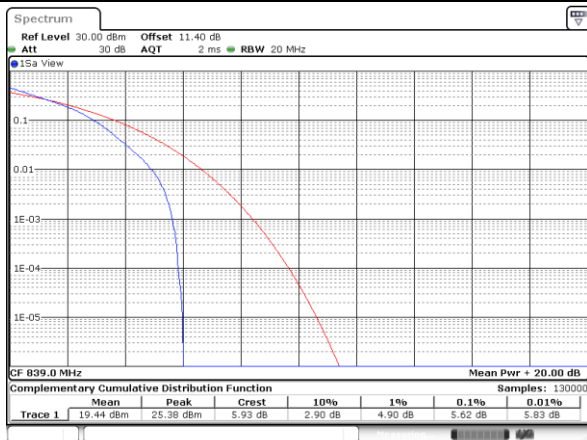

Date: 29_JUN.2020 15:24:57

Date: 29_JUN.2020 15:24:44



26dB Bandwidth

Mode	FR1 n5 : 26dB BW(MHz) / DFT-S OFDM							
BW	5MHz		10MHz		15MHz		20MHz	
Mod.	PI/2 BPSK		PI/2 BPSK		PI/2 BPSK		PI/2 BPSK	
Lowest CH	5.21		9.43		14.30		18.86	
Middle CH	5.07		9.51		14.27		18.82	
Highest CH	5.13		9.47		14.42		18.74	

Mode	FR1 n5 : 26dB BW(MHz) / CP OFDM							
BW	5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	5.13	5.14	9.83	10.01	15.02	15.20	19.82	20.06
Middle CH	5.04	4.95	9.89	9.95	15.11	15.08	20.06	19.90
Highest CH	5.13	5.24	9.87	9.85	15.08	14.99	19.86	20.02


Mode	FR1 n5 : 26dB BW(MHz) / CP OFDM							
BW	5MHz		10MHz		15MHz		20MHz	
Mod.	64QAM		64QAM		64QAM		64QAM	
Lowest CH	4.92		9.89		15.04		20.02	
Middle CH	5.05		9.87		15.02		19.94	
Highest CH	5.07		10.05		15.08		19.98	



FR1 n5 / 5MHz / DFT-S OFDM


PI/2 BPSK

Lowest Channel

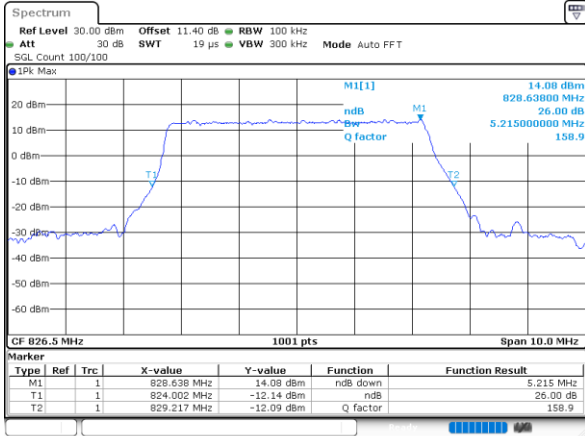


Date: 29_JUN_2020 16:56:32

Middle Channel

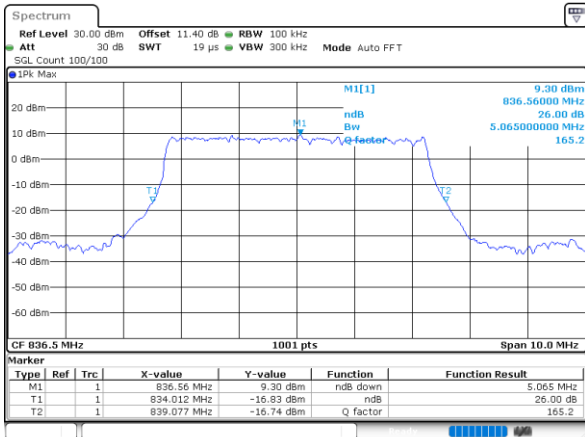

Date: 29_JUN_2020 16:55:31

Highest Channel

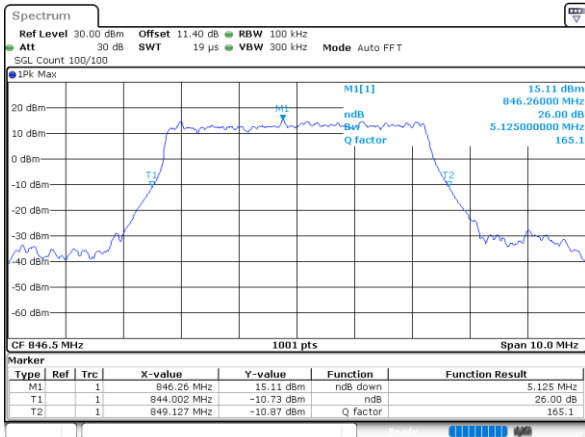

Date: 29_JUN_2020 16:40:46





FR1 n5 / 5MHz / CP OFDM

QPSK

16QAM

Lowest Channel

Lowest Channel

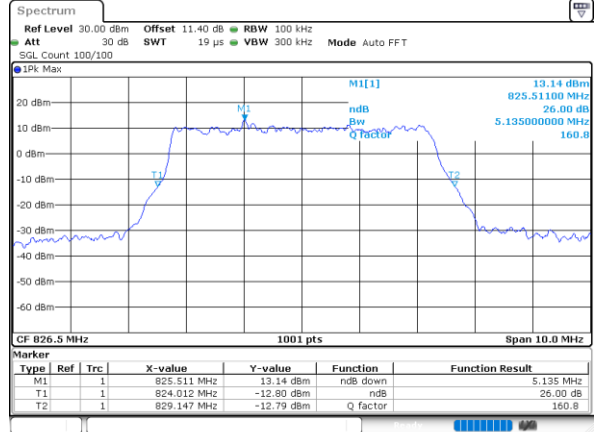
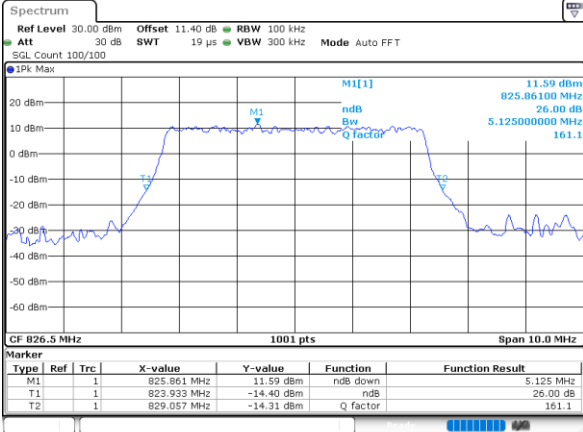


Date: 29_JUN_2020 16:13:07

Date: 29_JUN_2020 16:13:45

Middle Channel

Middle Channel

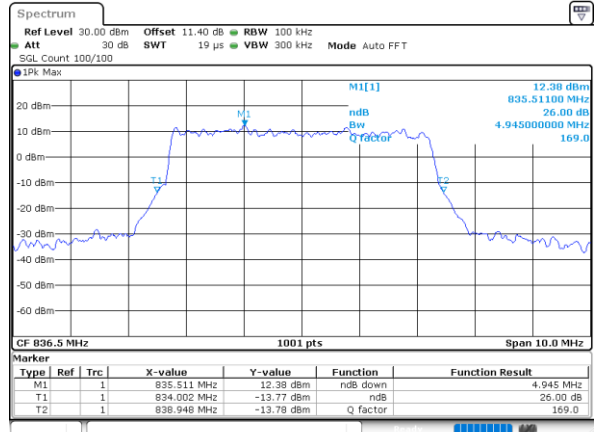
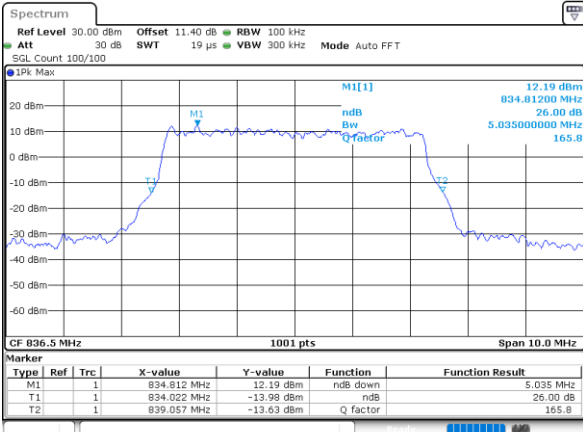


Date: 29_JUN_2020 16:13:10

Date: 29_JUN_2020 16:13:24

Highest Channel

Highest Channel

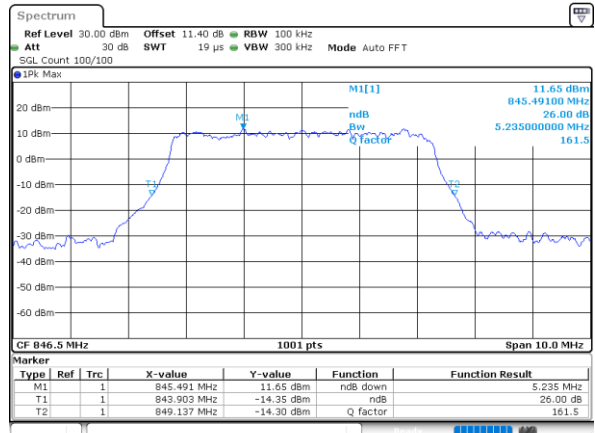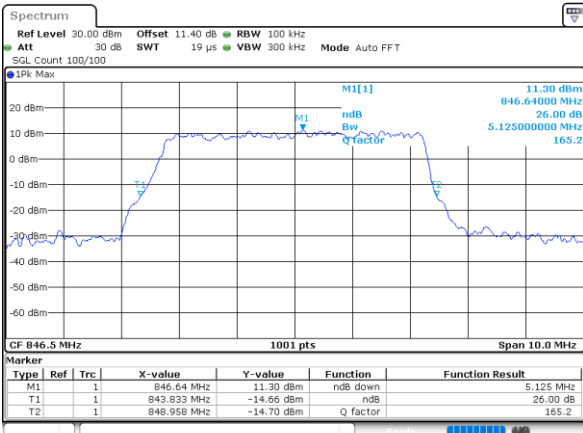

Date: 29_JUN_2020 16:13:33


Date: 29_JUN_2020 16:13:16



FR1 n5 / 5MHz / CP OFDM


64QAM

Lowest Channel

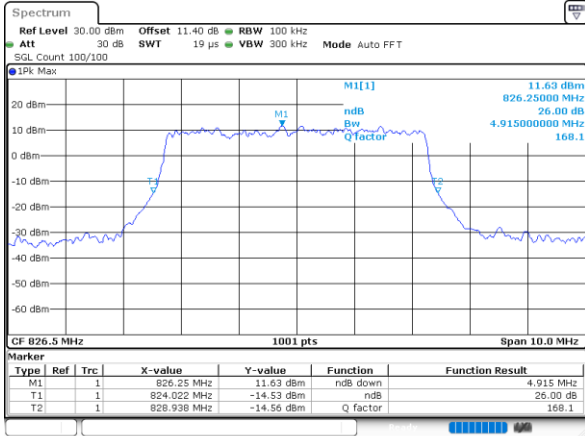


Date: 29_JUN,2020 16:35:31

Middle Channel

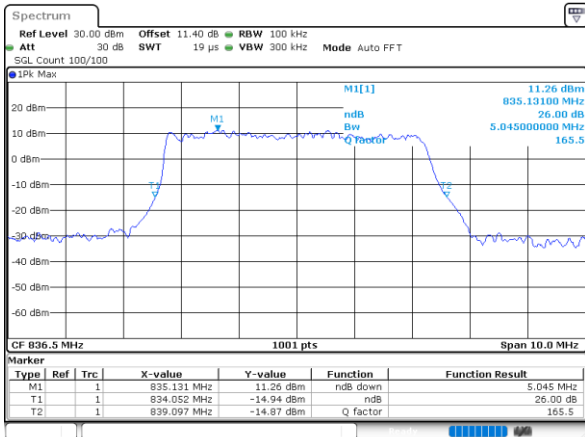

Date: 29_JUN,2020 16:37:47

Highest Channel

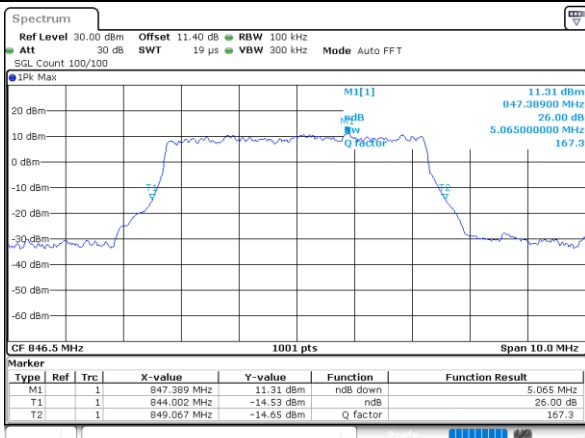


Date: 29_JUN,2020 16:38:56



FR1 n5 / 10MHz / DFT-S OFDM


PI/2 BPSK

Lowest Channel

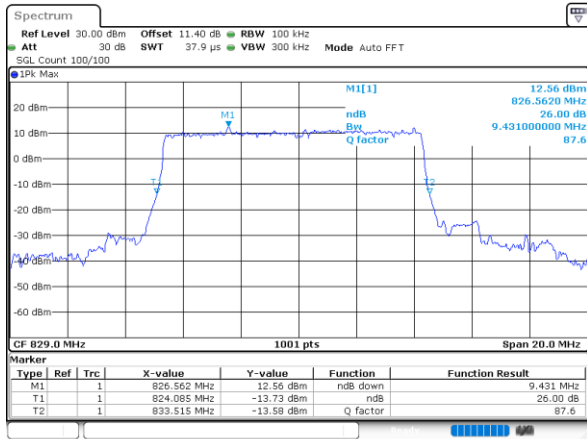


Date: 29_JUN.2020 16:11:12

Middle Channel

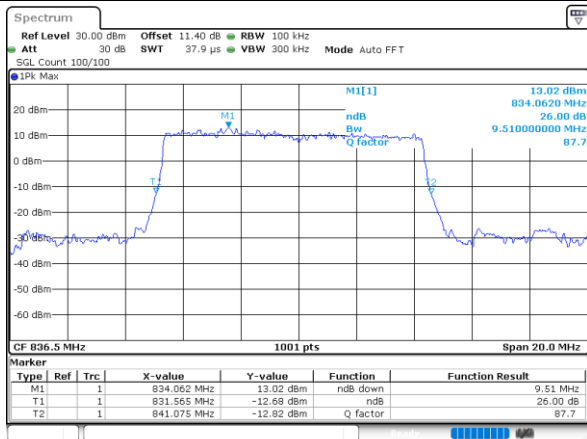

Date: 29_JUN.2020 16:19:11

Highest Channel

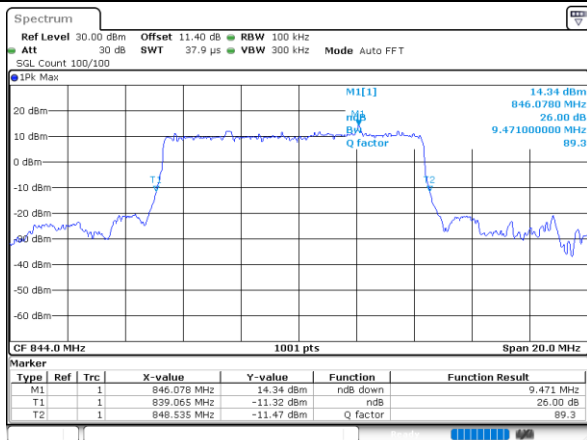

Date: 29_JUN.2020 16:19:43





FR1 n5 / 10MHz / CP OFDM

QPSK

16QAM

Lowest Channel

Lowest Channel

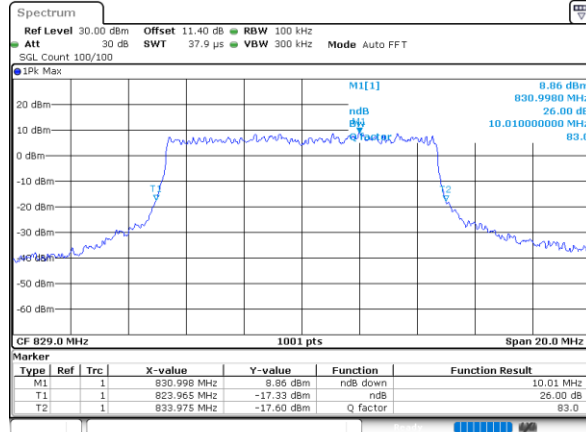
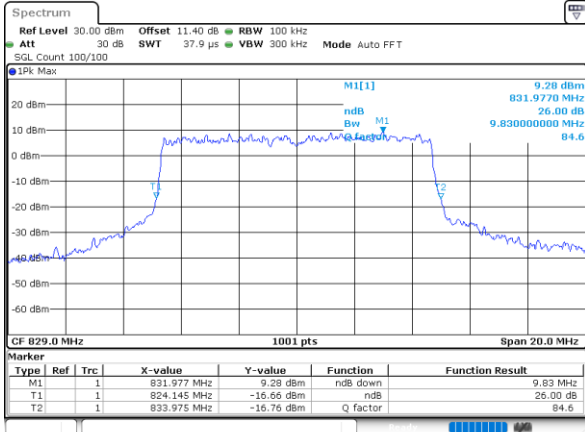


Date: 29 JUN 2020 16:33:08

Date: 29 JUN 2020 16:33:52

Middle Channel

Middle Channel

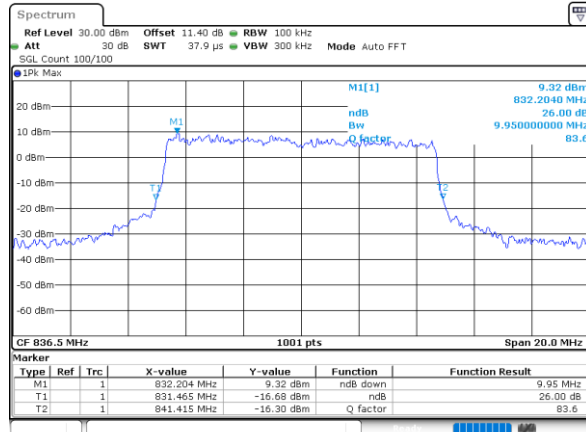
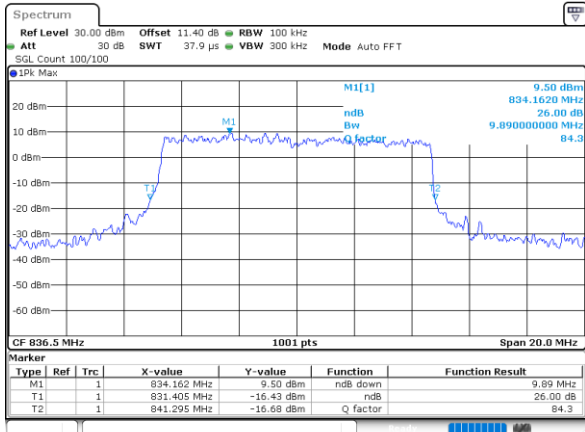


Date: 29 JUN 2020 16:29:54

Date: 29 JUN 2020 16:29:53

Highest Channel

Highest Channel

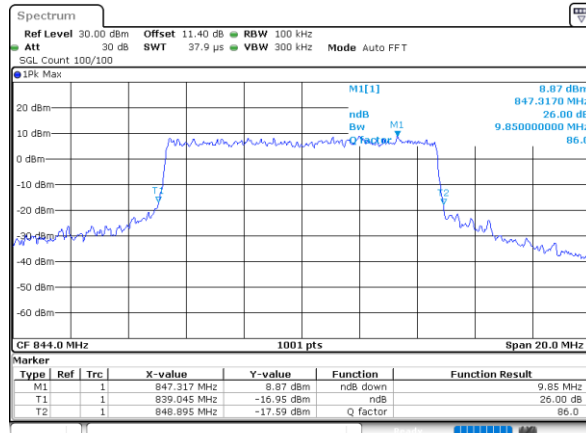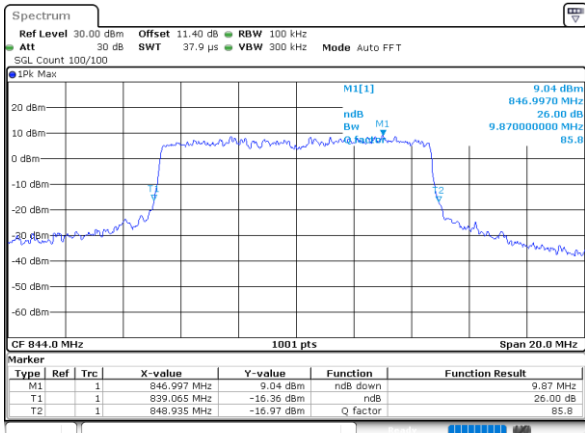

Date: 29 JUN 2020 16:31:52


Date: 29 JUN 2020 16:31:28



FR1 n5 / 10MHz / CP OFDM


64QAM

Lowest Channel

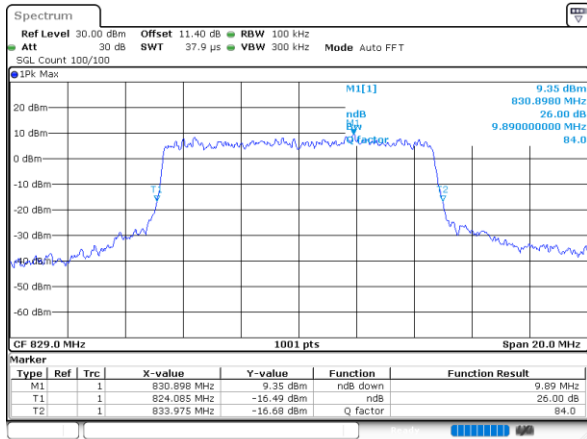


Date: 29_JUN,2020 16:34:05

Middle Channel

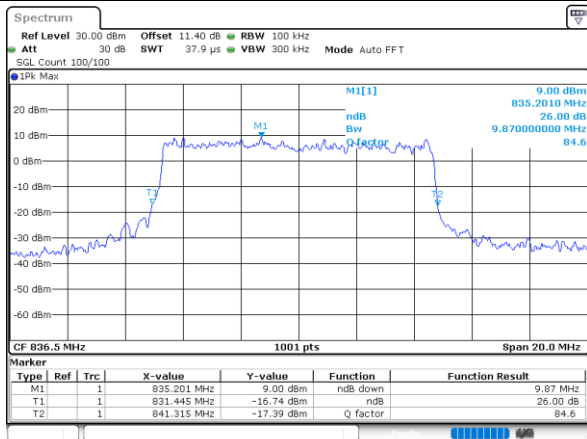

Date: 29_JUN,2020 16:35:06

Highest Channel

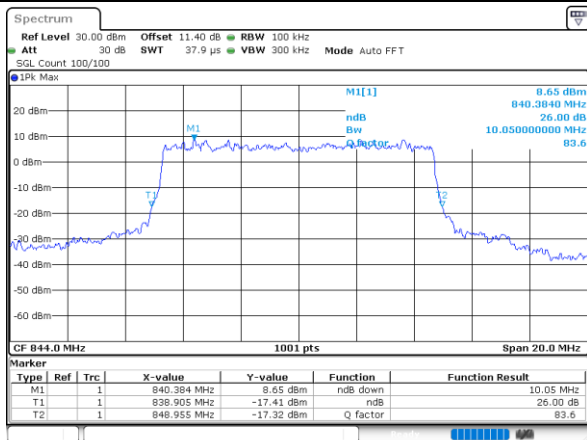


Date: 29_JUN,2020 16:31:13




FR1 n5 / 15MHz / DFT-S OFDM

PI/2 BPSK


Lowest Channel

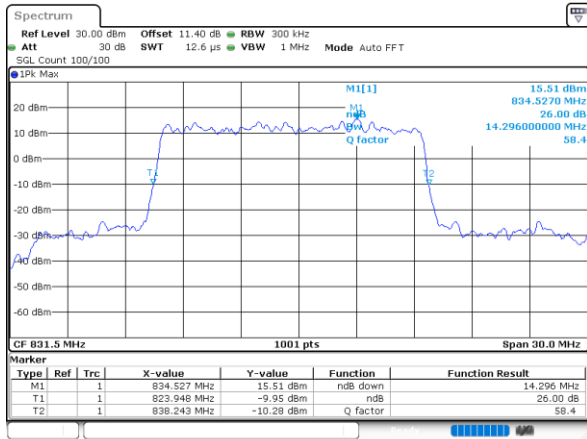

Middle Channel

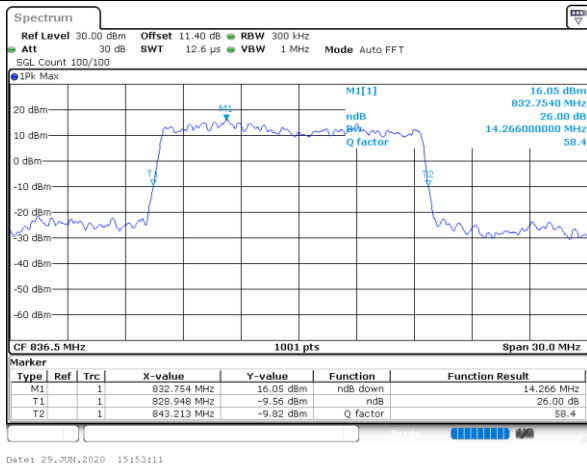

Highest Channel

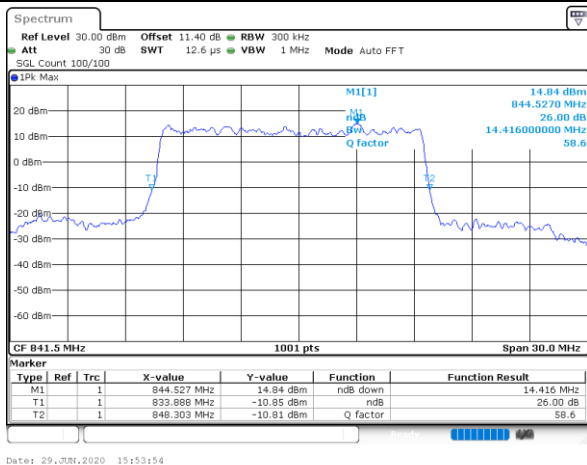





FR1 n5 / 15MHz / CP OFDM

QPSK

16QAM

Lowest Channel

Lowest Channel

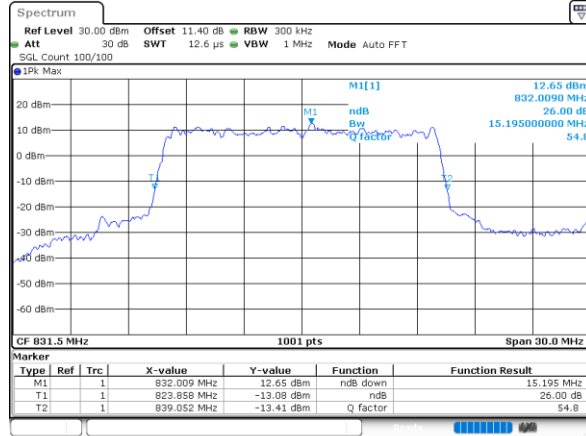
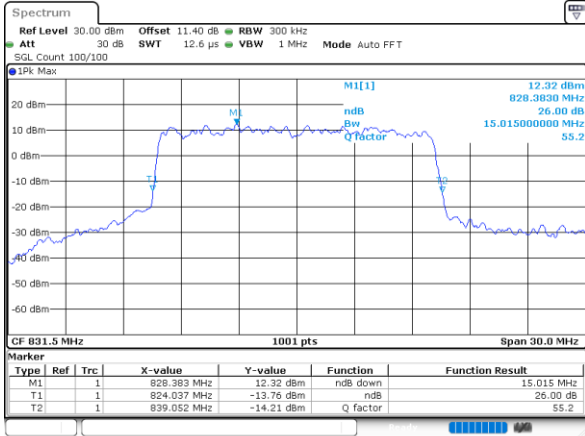


Date: 29_JUN,2020 16:04:49

Date: 29_JUN,2020 16:05:33

Middle Channel

Middle Channel

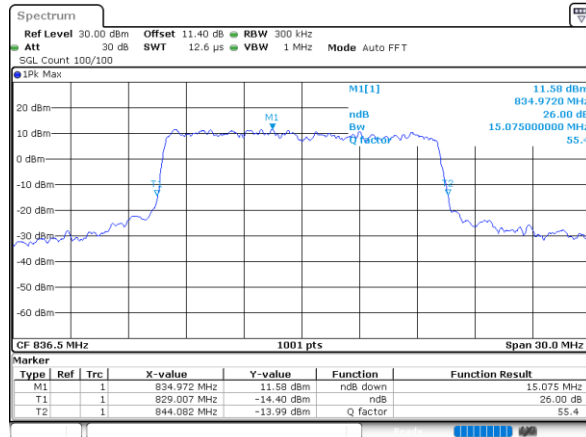
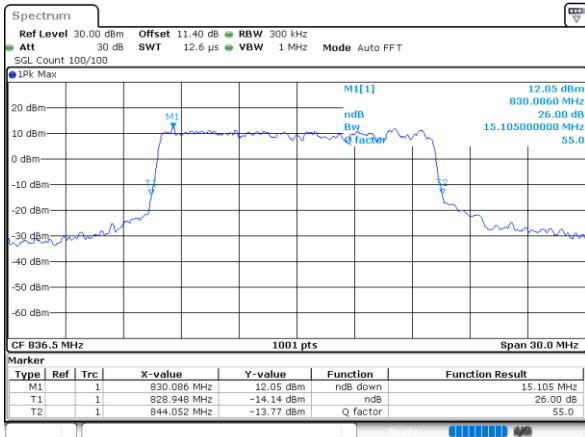


Date: 29_JUN,2020 16:04:20

Date: 29_JUN,2020 16:04:06

Highest Channel

Highest Channel

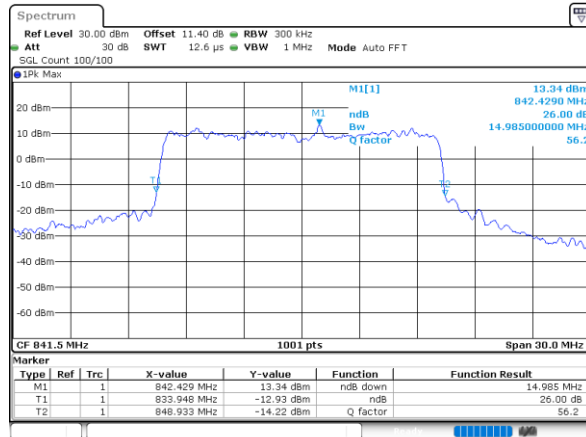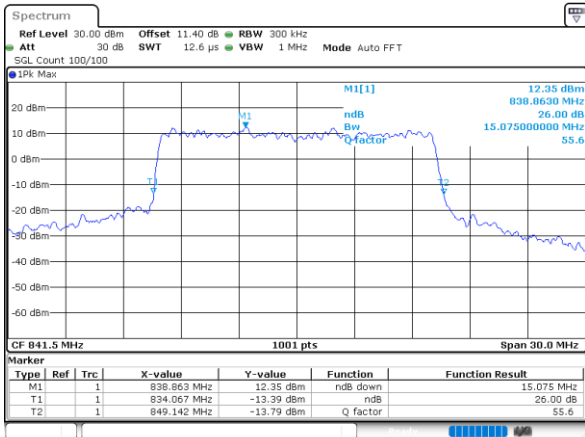

Date: 29_JUN,2020 16:01:46


Date: 29_JUN,2020 16:02:31



FR1 n5 / 15MHz / CP OFDM


64QAM

Lowest Channel

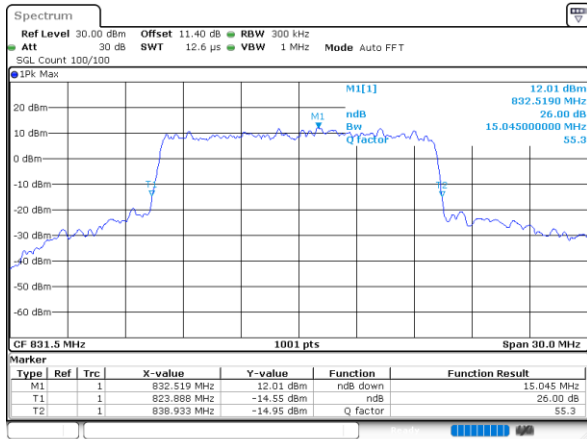


Date: 29_JUN_2020 16:05:46

Middle Channel

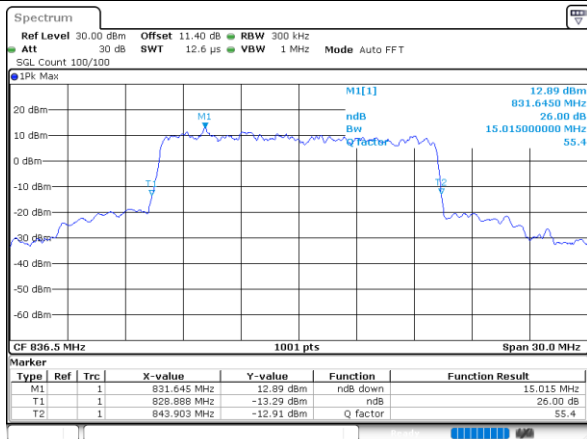

Date: 29_JUN_2020 16:03:51

Highest Channel

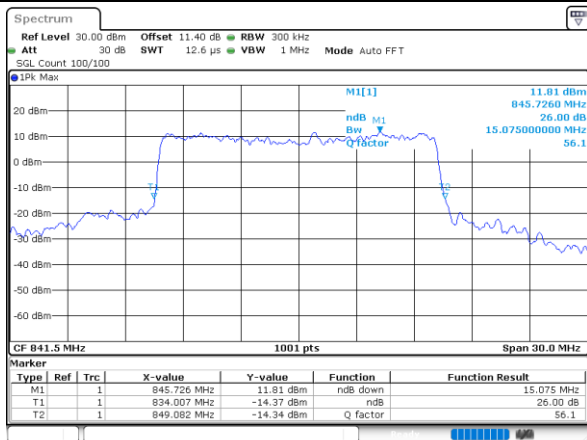


Date: 29_JUN_2020 16:02:44



FR1 n5 / 20MHz / DFT-S OFDM


PI/2 BPSK

Lowest Channel

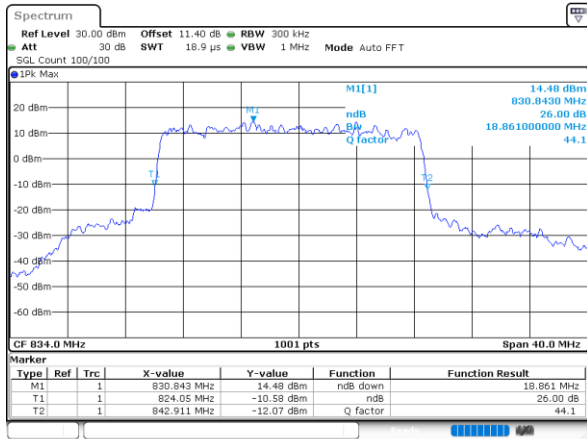


Date: 29_JUN,2020 15:03:46

Middle Channel

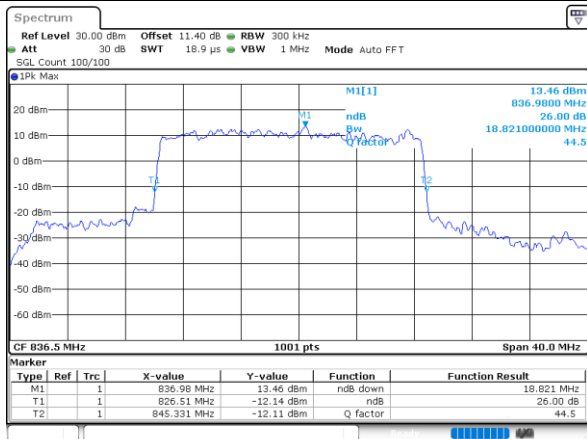

Date: 29_JUN,2020 15:20:37

Highest Channel

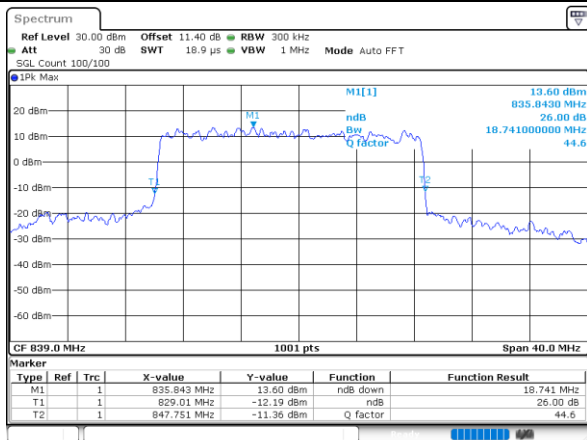

Date: 29_JUN,2020 15:29:14





FR1 n5 / 20MHz / CP OFDM

QPSK

16QAM

Lowest Channel

Lowest Channel

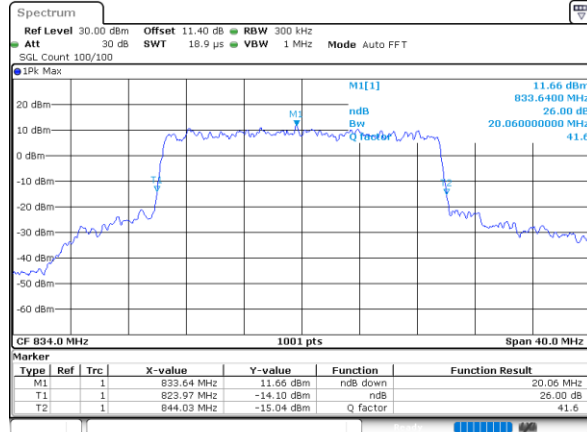
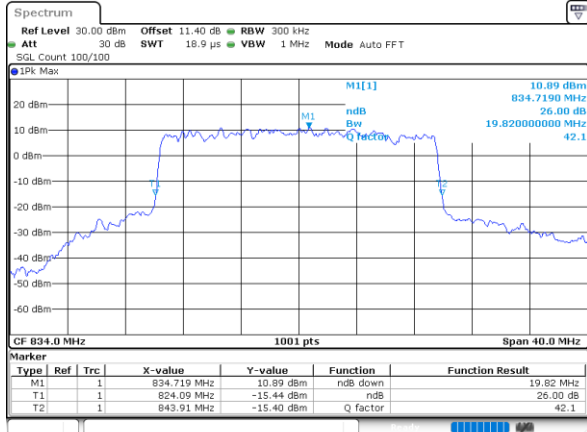


Date: 29_JUN_2020 15:35:30

Date: 29_JUN_2020 15:35:09

Middle Channel

Middle Channel

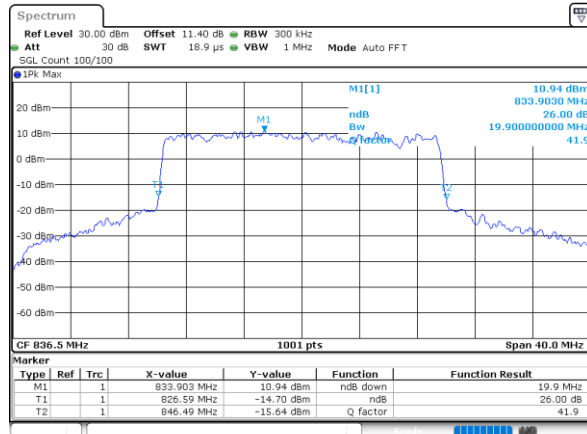
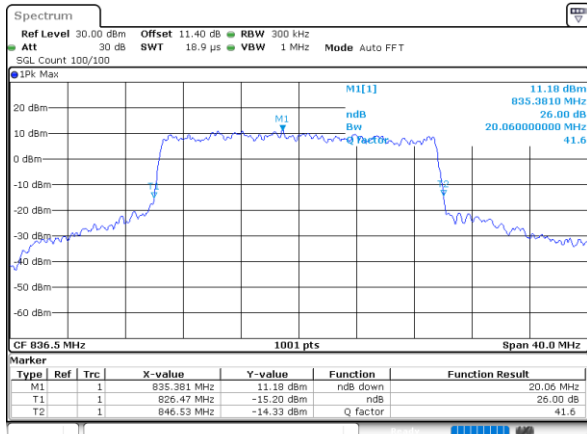


Date: 29_JUN_2020 15:33:22

Date: 29_JUN_2020 15:33:40

Highest Channel

Highest Channel

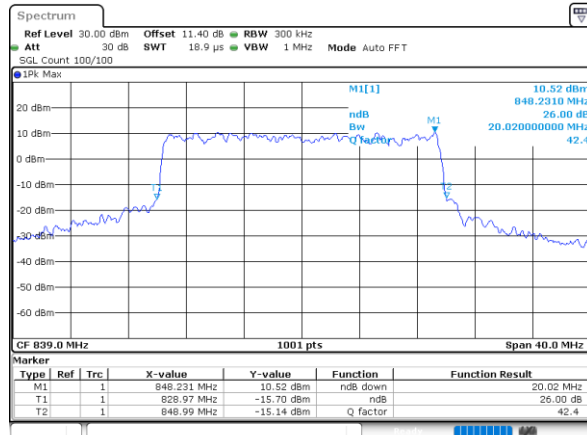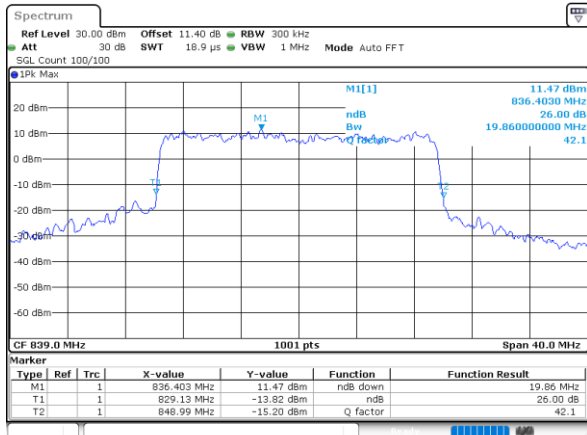

Date: 29_JUN_2020 15:30:12


Date: 29_JUN_2020 15:31:06



FR1 n5 / 20MHz / CP OFDM


64QAM

Lowest Channel

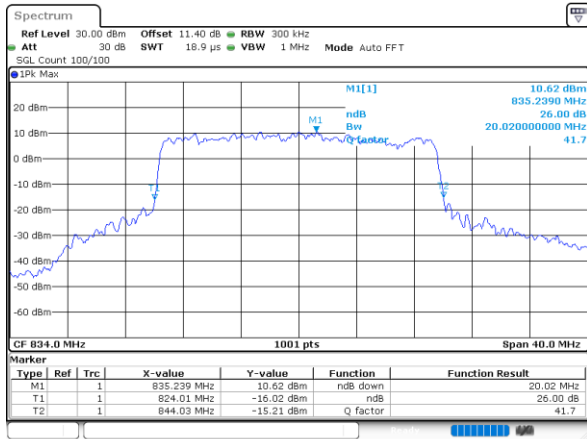


Date: 29 JUN 2020 15:34:55

Middle Channel

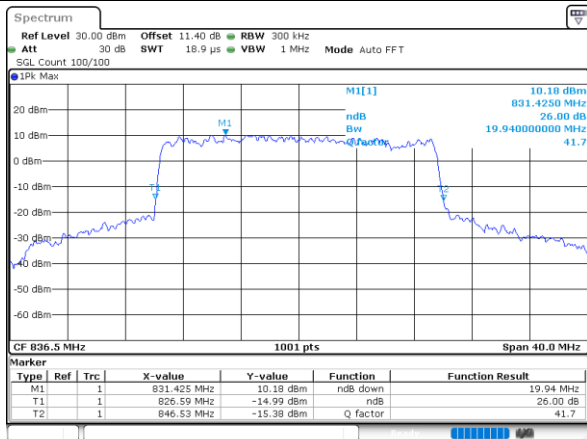

Date: 29 JUN 2020 15:33:55

Highest Channel

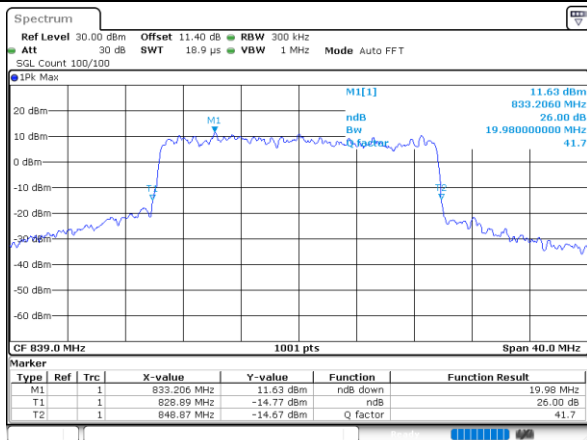

Date: 29 JUN 2020 15:31:24



Occupied Bandwidth

Mode	FR1 n5 : 99%OBW(MHz) / DFT-S OFDM							
BW	5MHz		10MHz		15MHz		20MHz	
Mod.	PI/2 BPSK		PI/2 BPSK		PI/2 BPSK		PI/2 BPSK	
Lowest CH	4.47		8.91		13.46		17.82	
Middle CH	4.49		8.89		13.43		17.78	
Highest CH	4.49		8.91		13.52		17.94	

Mode	FR1 n5 : 99%OBW (MHz) / CP OFDM							
BW	5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	4.49	4.52	9.27	9.27	14.15	14.12	18.86	18.90
Middle CH	4.49	4.48	9.27	9.27	14.09	14.15	18.90	18.94
Highest CH	4.53	4.48	9.29	9.25	14.12	14.18	18.90	18.94


Mode	FR1 n5 : 99%OBW (MHz) / CP OFDM							
BW	5MHz		10MHz		15MHz		20MHz	
Mod.	64QAM		64QAM		64QAM		64QAM	
Lowest CH	4.48		9.25		14.12		18.86	
Middle CH	4.48		9.27		14.09		18.90	
Highest CH	4.49		9.29		14.18		18.90	



FR1 n5 / 5MHz / DFT-S OFDM


PI/2 BPSK

Lowest Channel

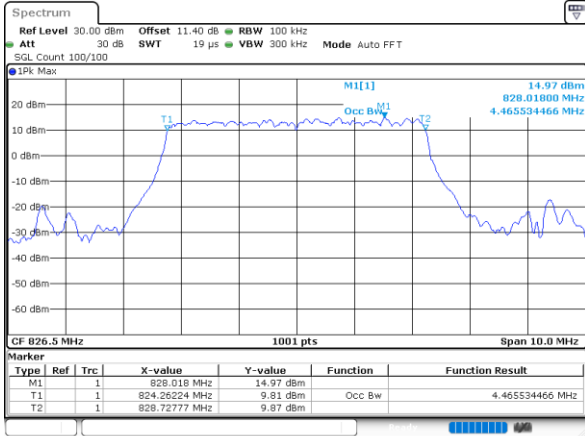


Date: 29 JUN 2020 16:56:24

Middle Channel

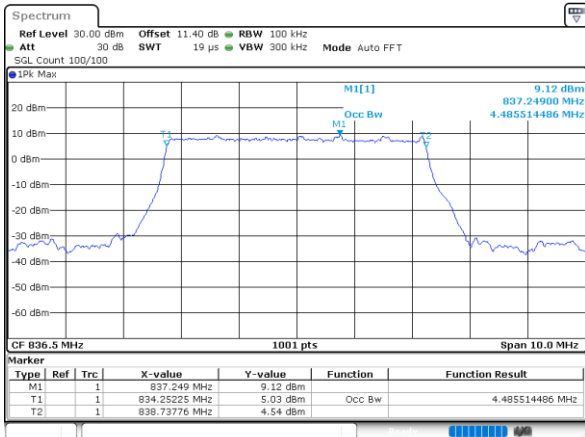

Date: 29 JUN 2020 16:55:22

Highest Channel

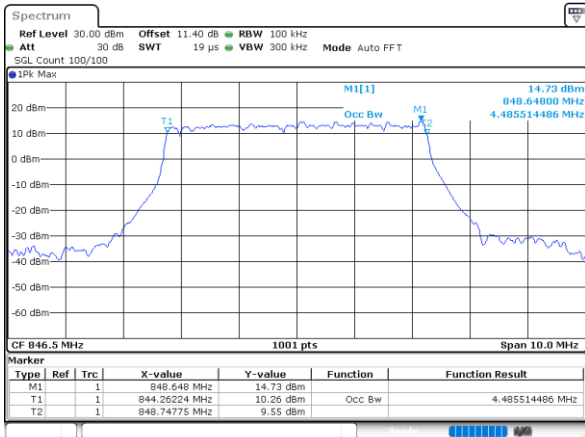

Date: 29 JUN 2020 16:40:40





FR1 n5 / 5MHz / CP OFDM

QPSK

16QAM

Lowest Channel

Lowest Channel

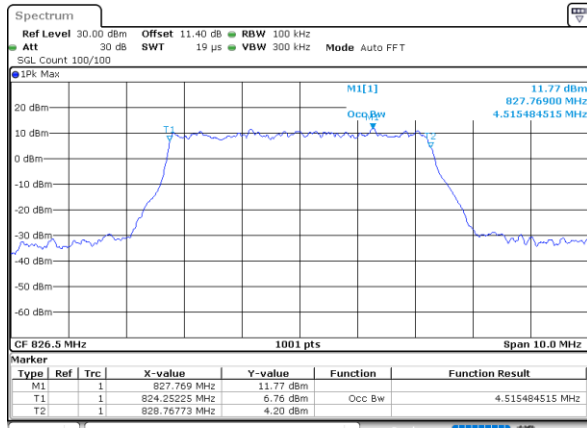
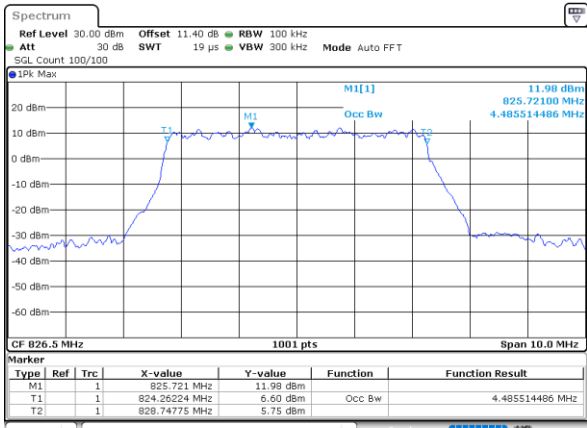


Date: 29_JUN,2020 16:36:02

Date: 29_JUN,2020 16:35:39

Middle Channel

Middle Channel

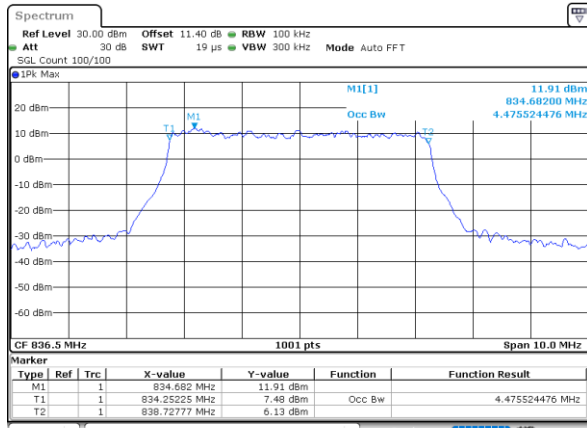
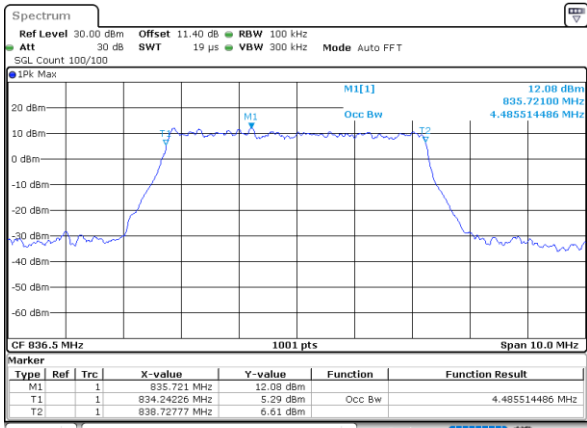


Date: 29_JUN,2020 16:37:04

Date: 29_JUN,2020 16:37:19

Highest Channel

Highest Channel

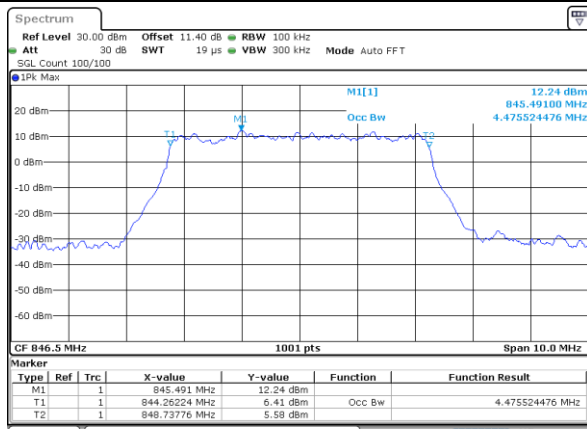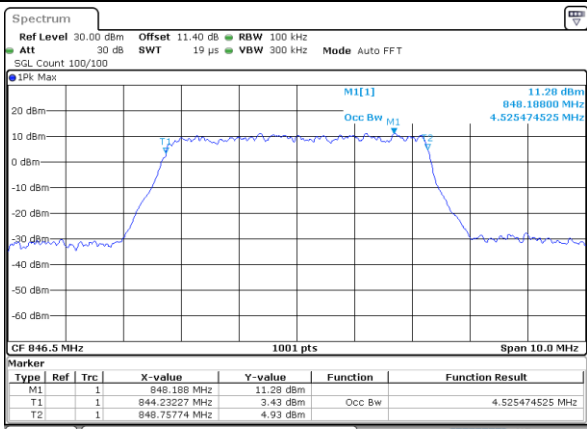

Date: 29_JUN,2020 16:39:27


Date: 29_JUN,2020 16:39:10



FR1 n5 / 5MHz / CP OFDM


64QAM

Lowest Channel

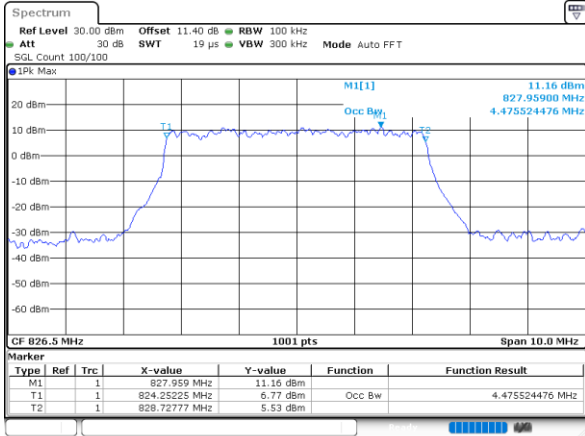


Date: 29 JUN 2020 16:35:26

Middle Channel

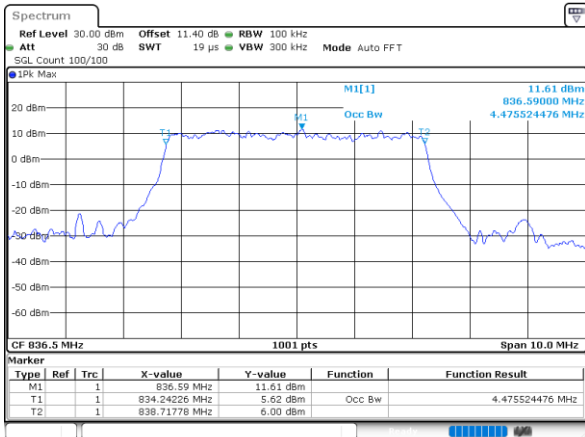

Date: 29 JUN 2020 16:37:40

Highest Channel

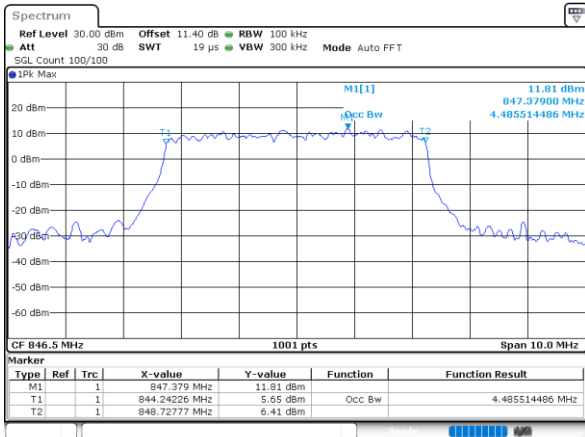


Date: 29 JUN 2020 16:38:51



FR1 n5 / 10MHz / DFT-S OFDM


PI/2 BPSK

Lowest Channel

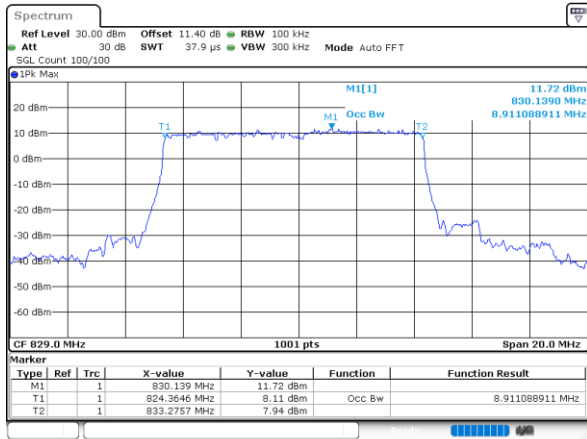


Date: 29_JUN.2020 16:11:06

Middle Channel

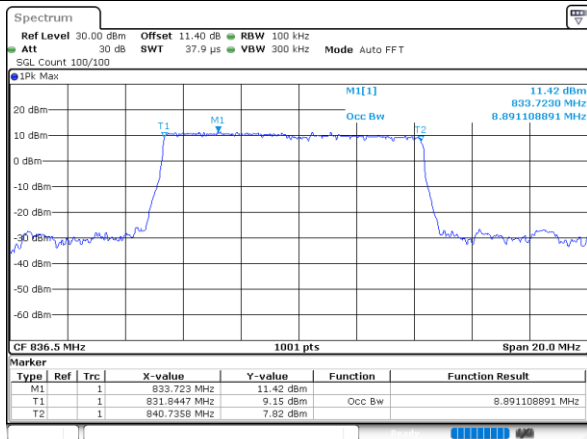

Date: 29_JUN.2020 16:19:05

Highest Channel

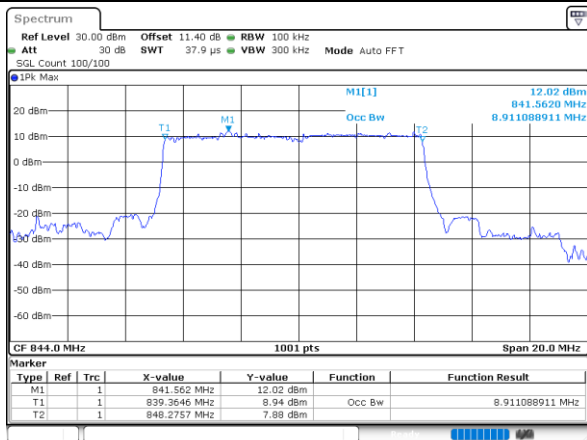

Date: 29_JUN.2020 16:19:36





FR1 n5 / 10MHz / CP OFDM

QPSK

16QAM

Lowest Channel

Lowest Channel

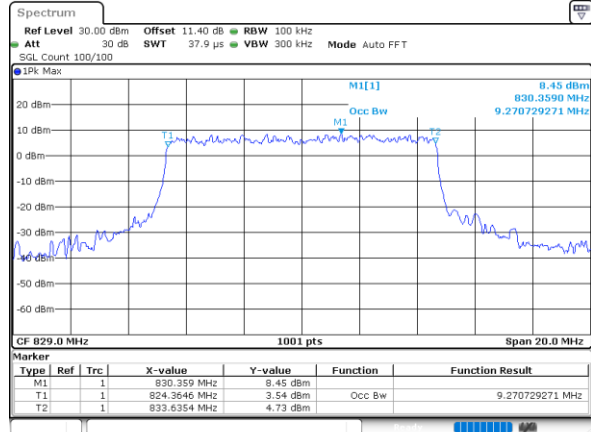
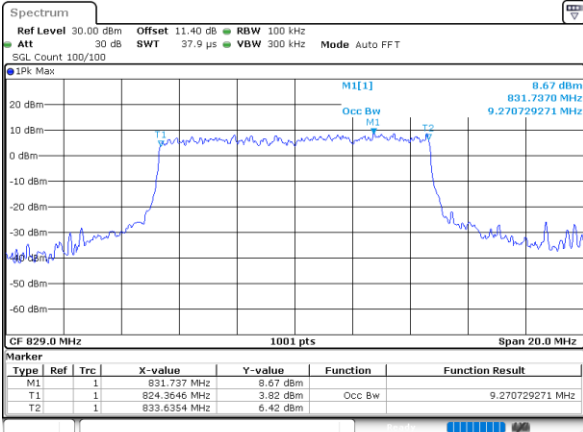


Date: 29_JUN,2020 16:13:00

Date: 29_JUN,2020 16:13:47

Middle Channel

Middle Channel

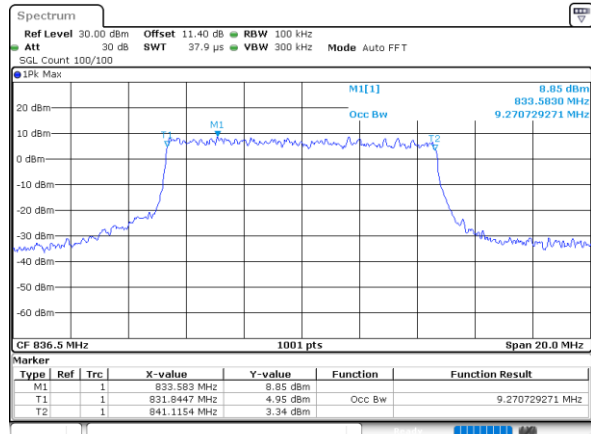
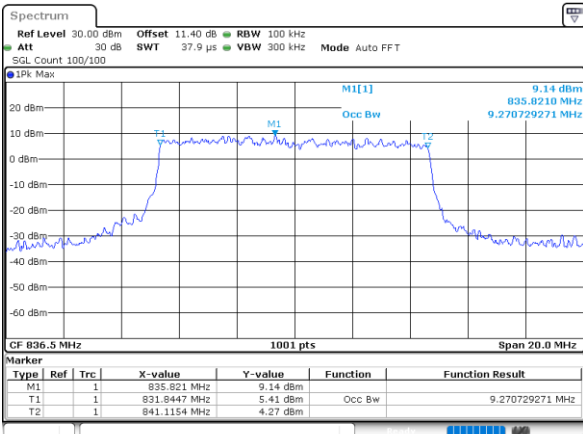


Date: 29_JUN,2020 16:29:27

Date: 29_JUN,2020 16:12:44

Highest Channel

Highest Channel

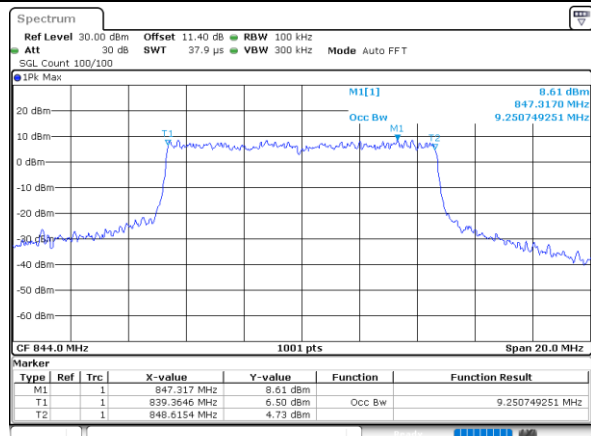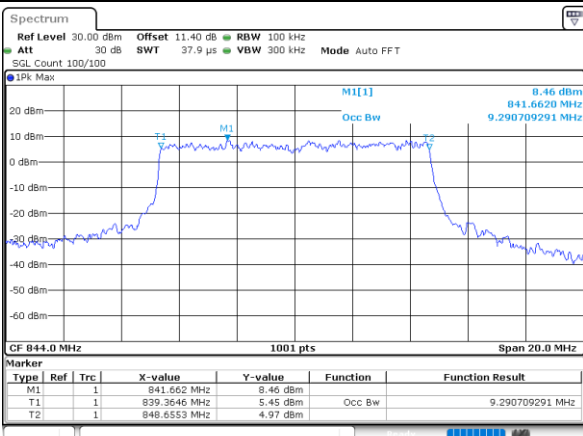

Date: 29_JUN,2020 16:31:46


Date: 29_JUN,2020 16:31:22




FR1 n5 / 10MHz / CP OFDM

64QAM


Lowest Channel

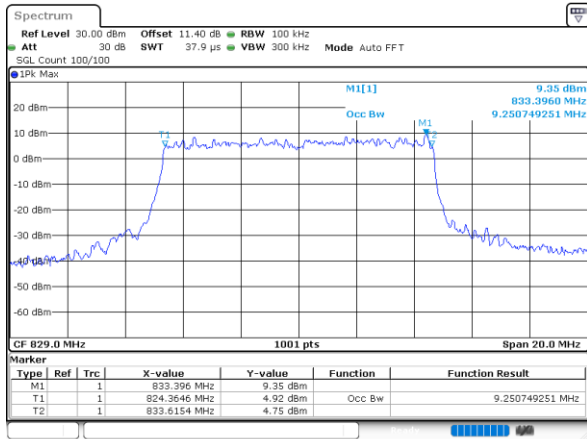

Middle Channel

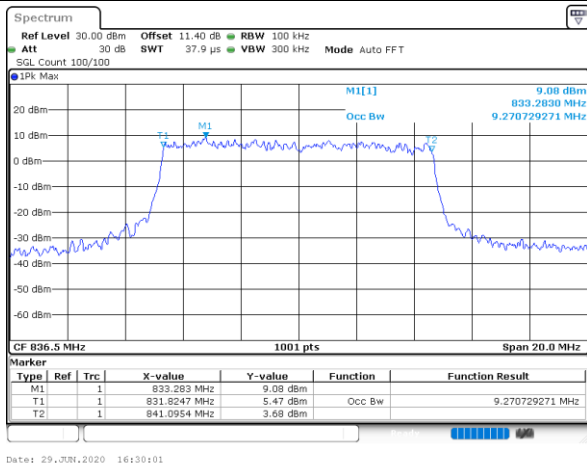

Highest Channel

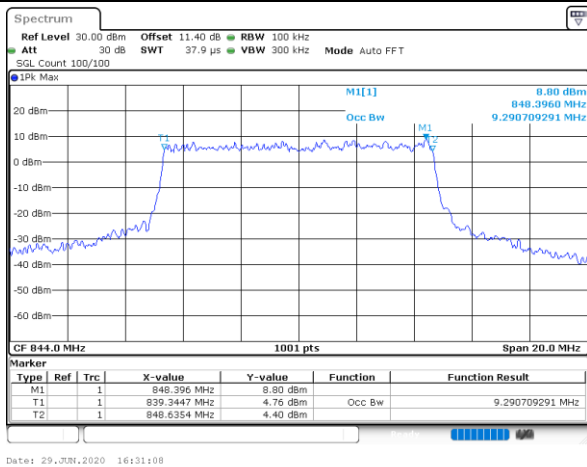





FR1 n5 / 15MHz / DFT-S OFDM

PI/2 BPSK


Lowest Channel

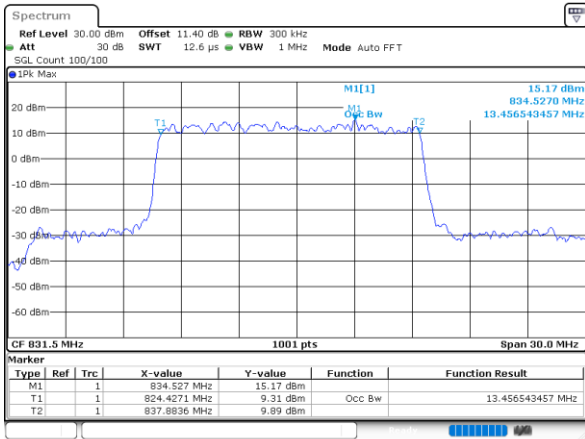

Middle Channel

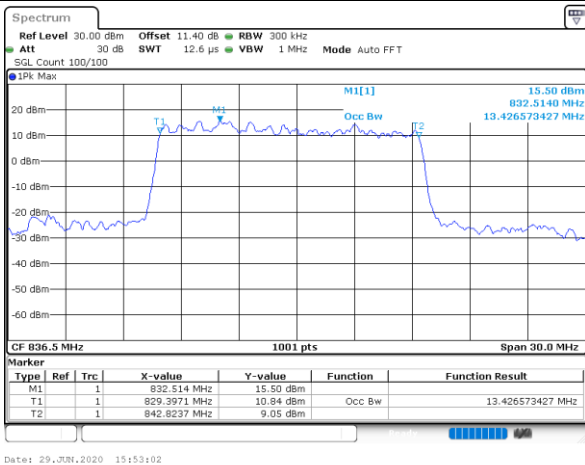

Highest Channel

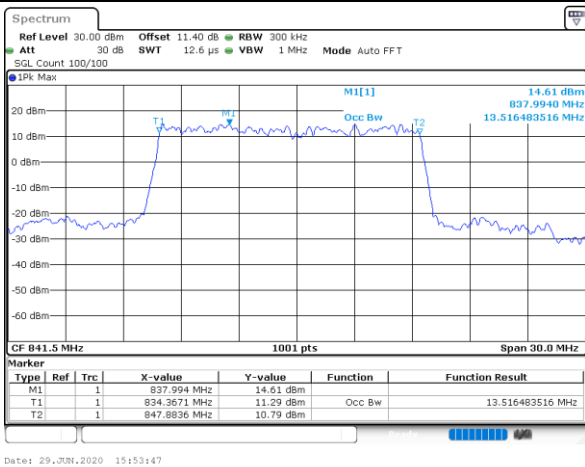





FR1 n5 / 15MHz / CP OFDM

QPSK

16QAM

Lowest Channel

Lowest Channel

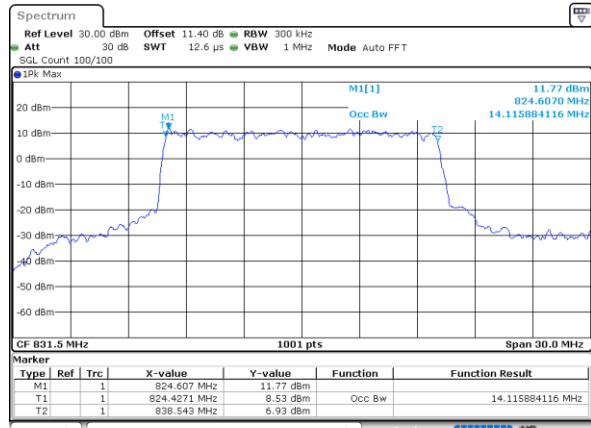
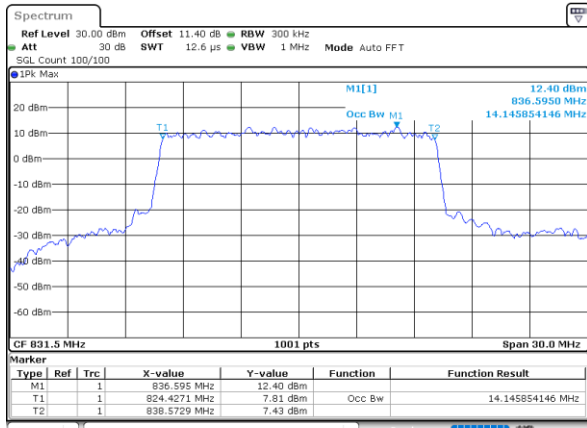


Date: 29_JUN,2020 16:04:43

Date: 29_JUN,2020 16:05:28

Middle Channel

Middle Channel

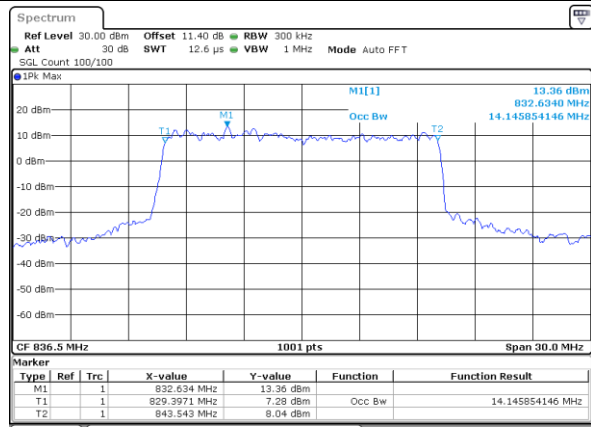
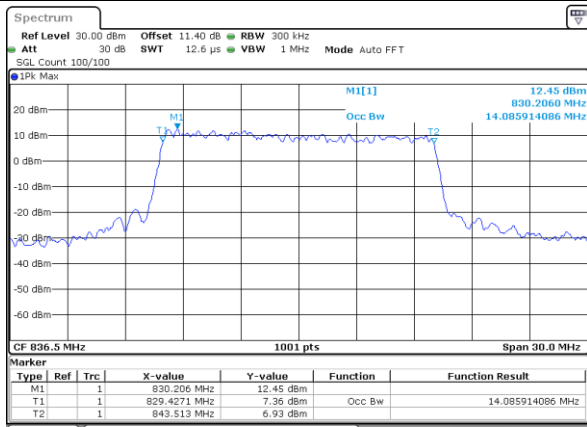


Date: 29_JUN,2020 16:04:14

Date: 29_JUN,2020 16:04:00

Highest Channel

Highest Channel

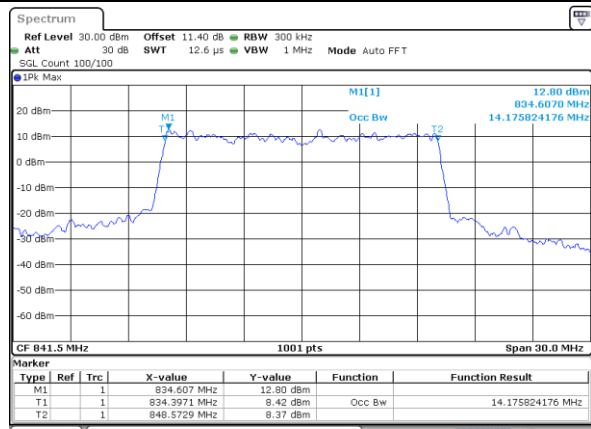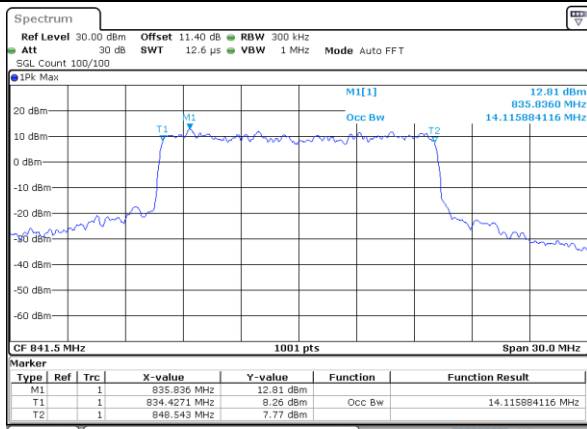

Date: 29_JUN,2020 16:01:39


Date: 29_JUN,2020 16:02:25



FR1 n5 / 15MHz / CP OFDM


64QAM

Lowest Channel

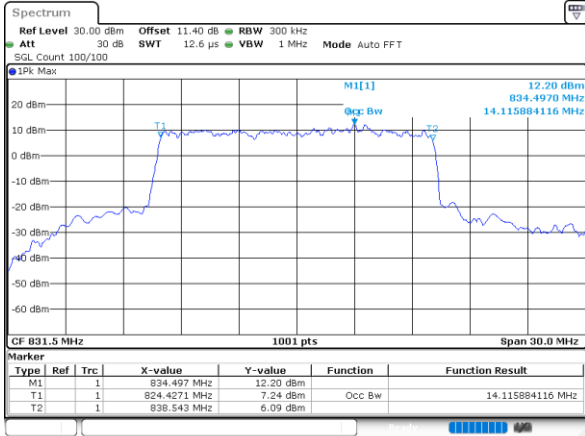


Date: 29_JUN,2020 16:05:40

Middle Channel

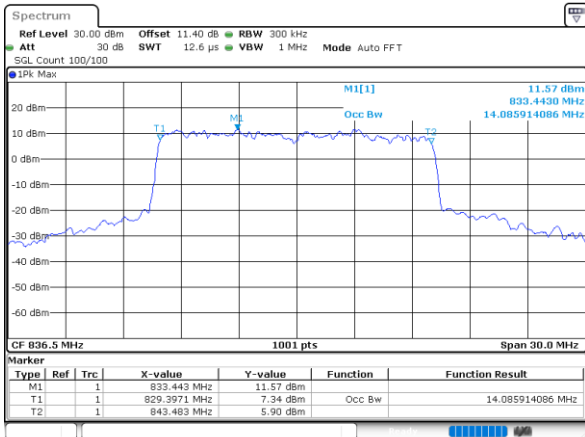

Date: 29_JUN,2020 16:03:45

Highest Channel

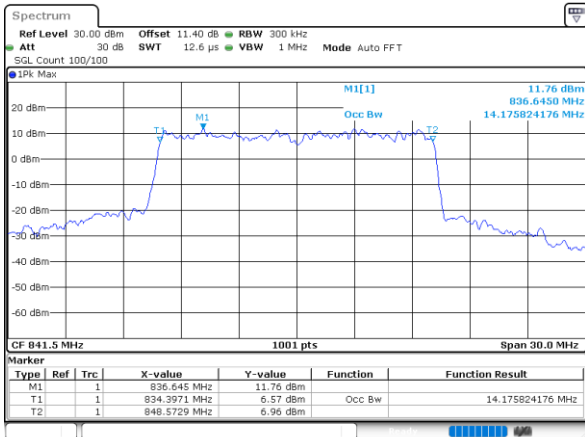


Date: 29_JUN,2020 16:02:38



FR1 n5 / 20MHz / DFT-S OFDM


PI/2 BPSK

Lowest Channel

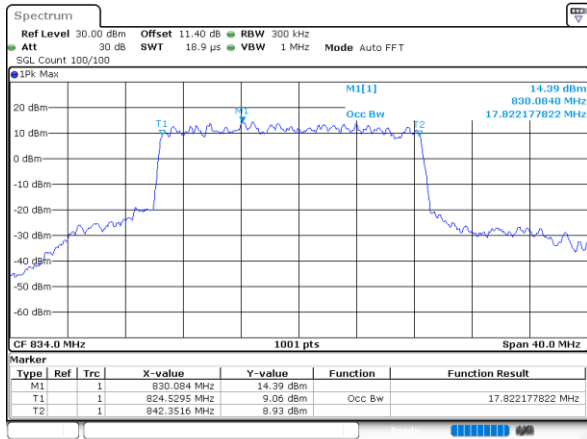


Date: 29 JUN 2020 15:03:30

Middle Channel

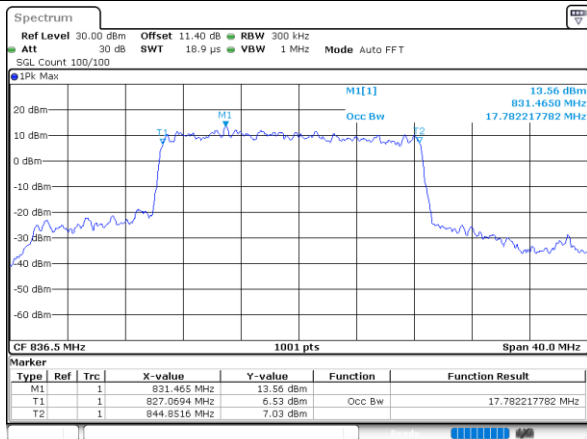

Date: 29 JUN 2020 15:20:25

Highest Channel

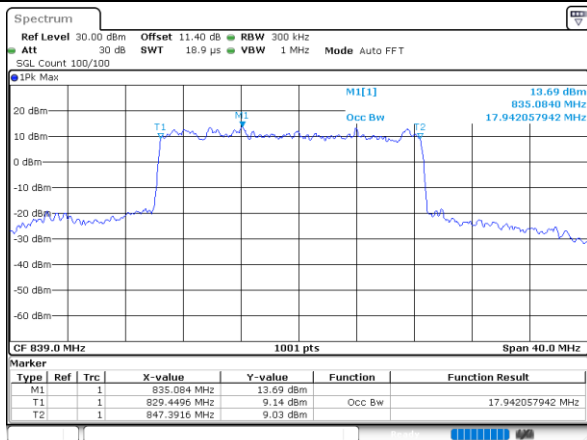

Date: 29 JUN 2020 15:29:08





FR1 n5 / 20MHz / CP OFDM

QPSK

16QAM

Lowest Channel

Lowest Channel

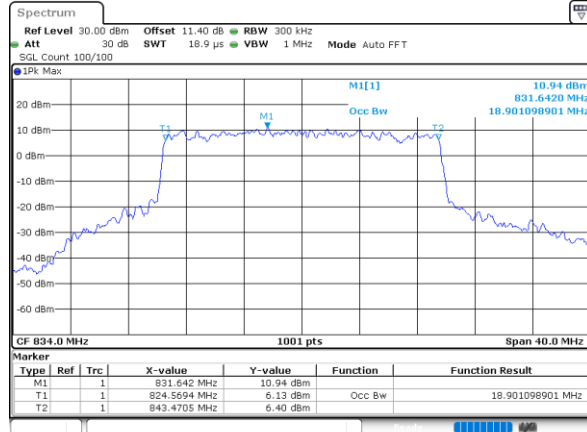
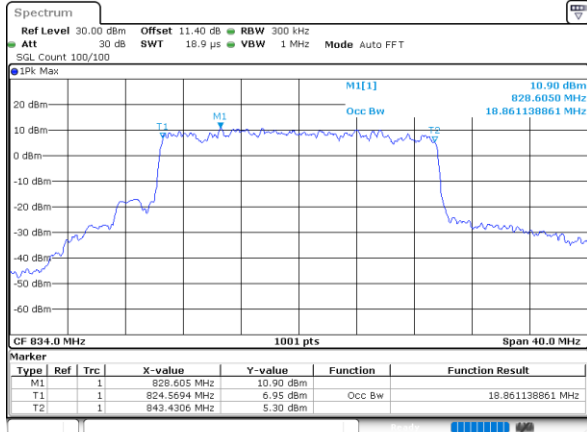


Date: 29_JUN,2020 15:35:23

Date: 29_JUN,2020 15:35:04

Middle Channel

Middle Channel

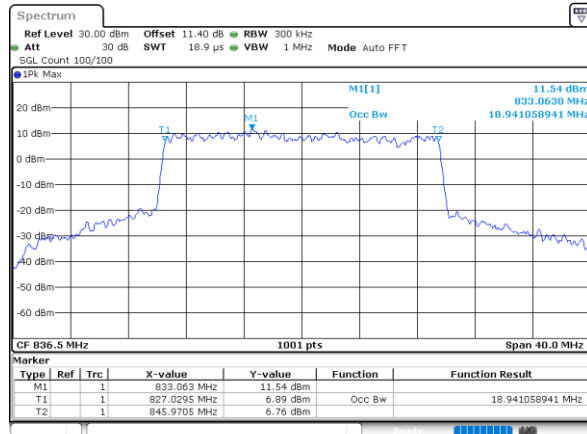
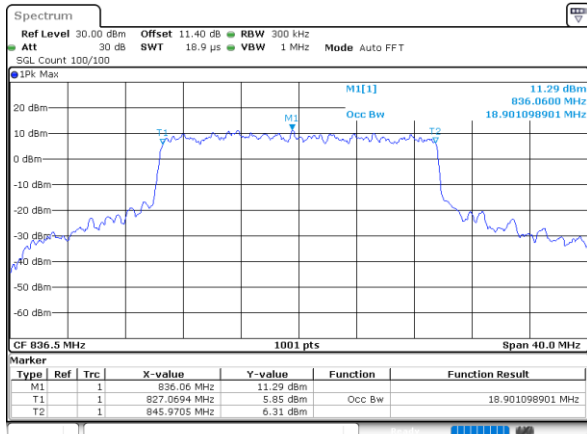


Date: 29_JUN,2020 15:33:15

Date: 29_JUN,2020 15:33:32

Highest Channel

Highest Channel

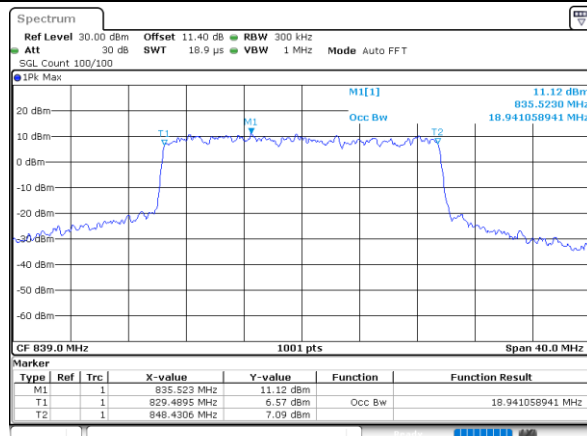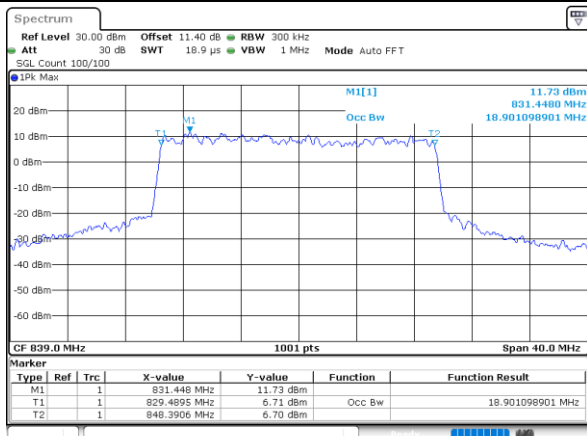

Date: 29_JUN,2020 15:30:03


Date: 29_JUN,2020 15:30:59



FR1 n5 / 20MHz / CP OFDM


64QAM

Lowest Channel

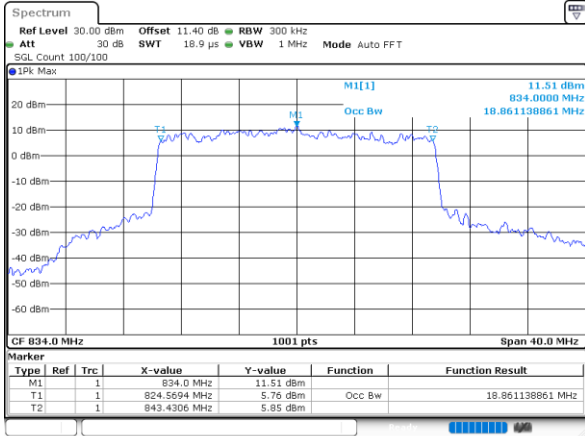


Date: 29 JUN 2020 15:34:49

Middle Channel

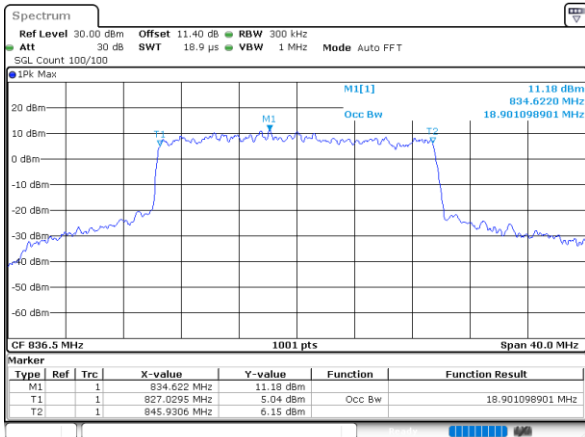

Date: 29 JUN 2020 15:33:49

Highest Channel

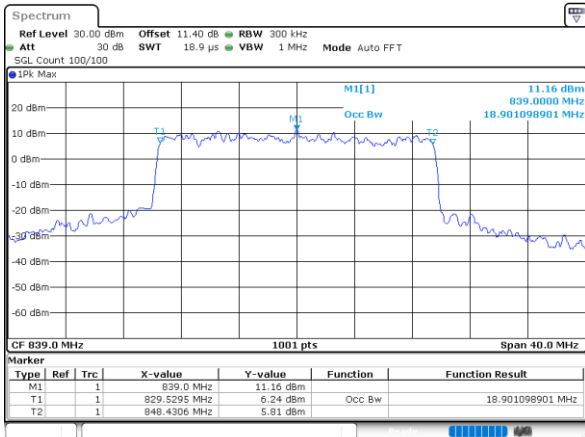

Date: 29 JUN 2020 15:31:16





Conducted Band Edge

FR1 n5 / 5MHz / DFT-S OFDM / PI/2 BPSK

Lowest Band Edge / 1RB0

Highest Band Edge / 1RBmax

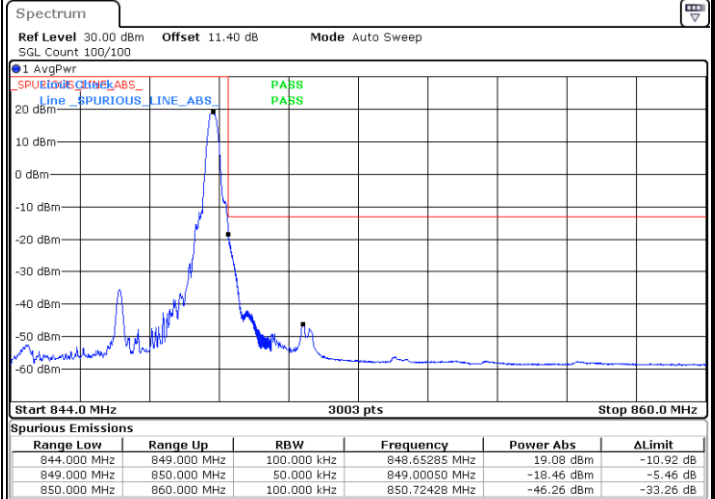
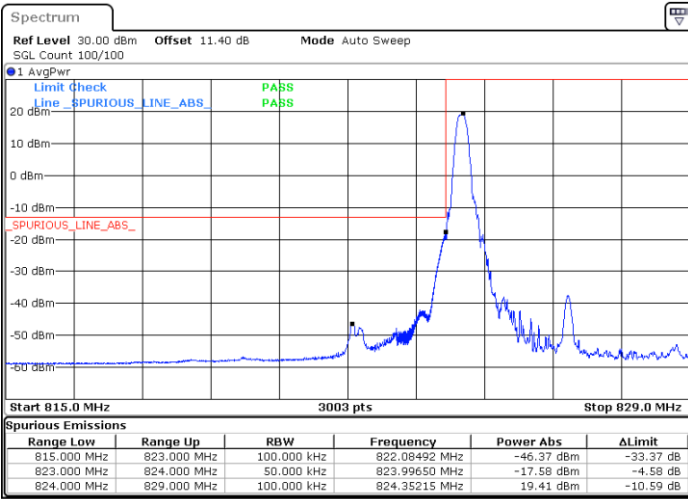


Date: 29 JUN 2020 17:10:42

Date: 29 JUN 2020 16:52:41

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

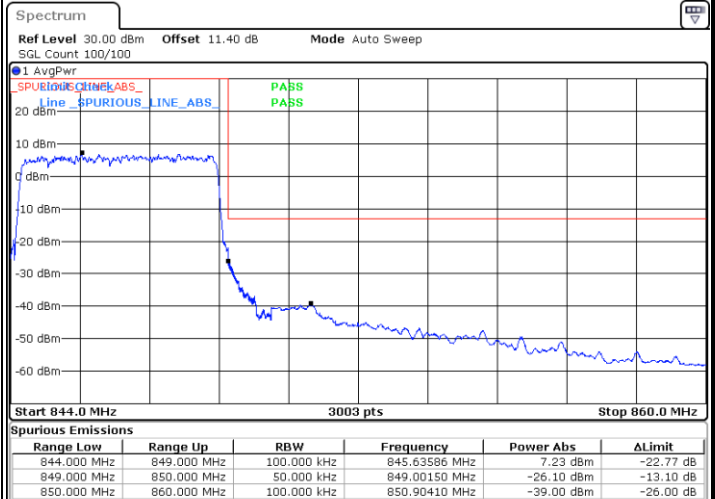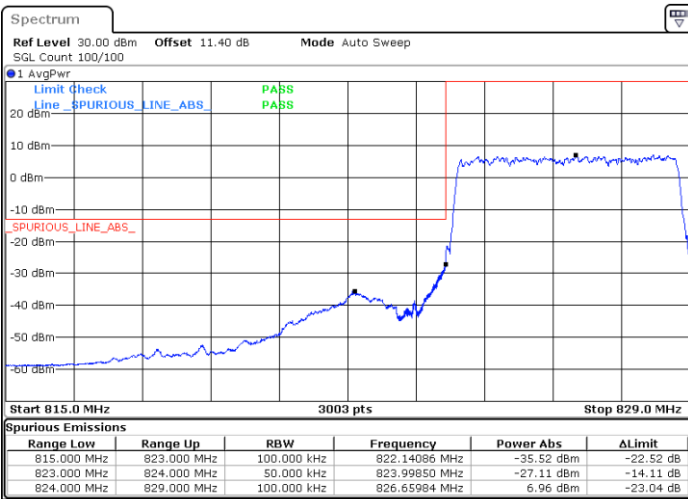

Date: 29 JUN 2020 16:57:11



Date: 29 JUN 2020 16:41:23



FR1 n5 / 5MHz / DFT-S OFDM / QPSK

Lowest Band Edge / 1RB0

Highest Band Edge / 1RBmax

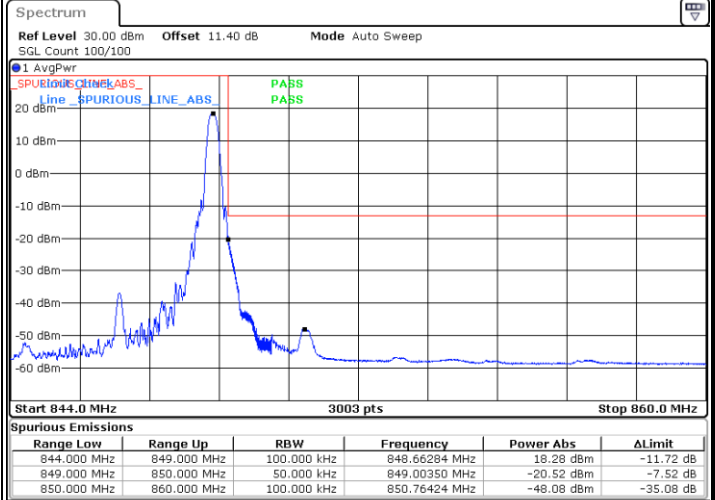
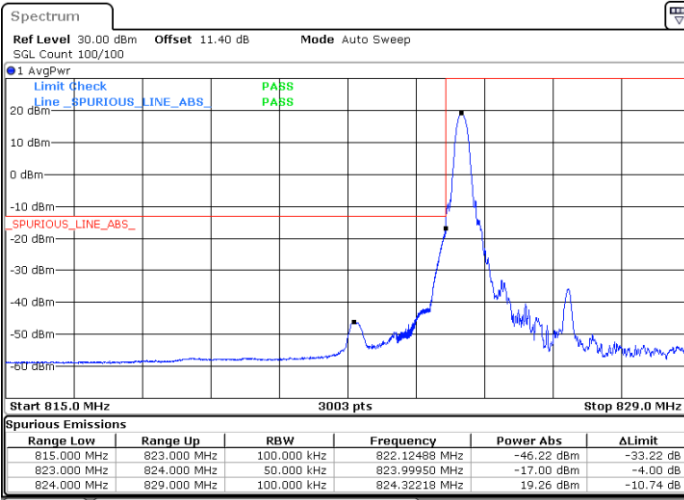


Date: 29 JUN.2020 17:09:55

Date: 29 JUN.2020 16:51:48

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

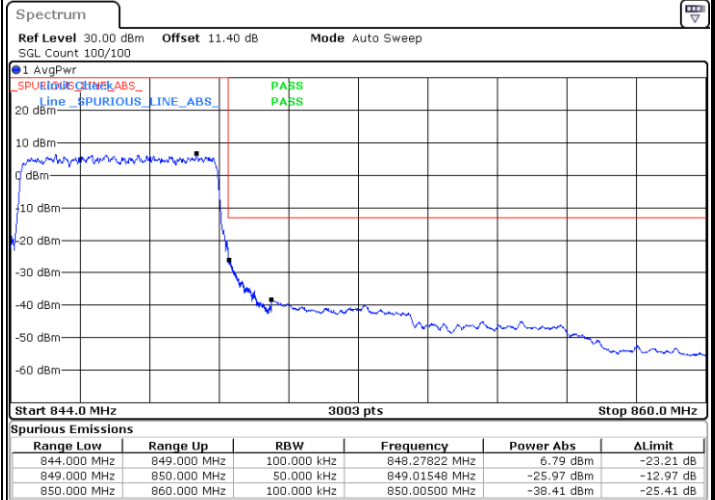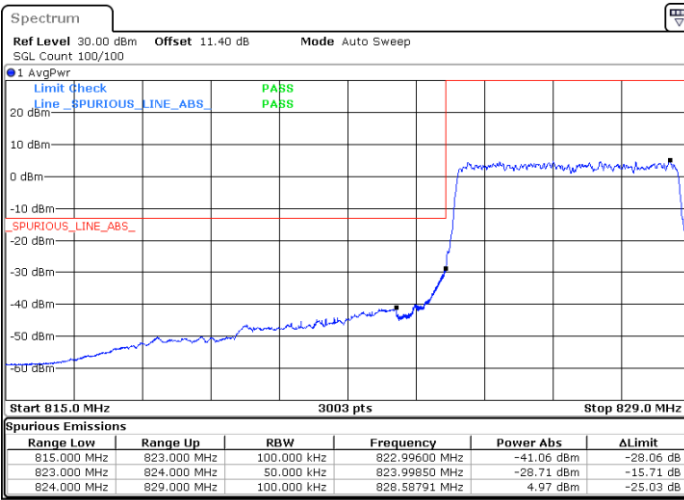

Date: 29 JUN.2020 16:57:54

Date: 29 JUN.2020 16:42:50