



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2075-3
FCC ID : IHDT56ZC3
STANDARD : 47 CFR Part 2, 27(M)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on May 11, 2020 and completely tested on May 30, 2020. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Reviewed by: Jason Jia / Supervisor

Approved by: James Huang / Manager



Sporton International (Kunshan) Inc.

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY...3
SUMMARY OF TEST RESULT...4
1 GENERAL DESCRIPTION...5
1.1 Applicant...5
1.2 Manufacturer...5
1.3 Product Feature of Equipment Under Test...5
1.4 Product Specification of Equipment Under Test...6
1.5 Specification of Accessory...6
1.6 Modification of EUT...6
1.7 Maximum EIRP Power, Frequency Tolerance, and Emission Designator...7
1.8 Testing Location...8
1.9 Test Software...8
1.10 Applicable Standards...8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST...9
2.1 Test Mode...9
2.2 Connection Diagram of Test System...9
2.3 Support Unit used in test configuration and system...10
2.4 Measurement Results Explanation Example...10
2.5 Frequency List of Low/Middle/High Channels...11
3 CONDUCTED TEST ITEMS...12
3.1 Measuring Instruments...12
3.2 Test Setup...12
3.3 Test Result of Conducted Test...12
3.4 Conducted Output Power and EIRP...13
3.5 Peak-to-Average Ratio...14
3.6 Occupied Bandwidth...15
3.7 Conducted Band Edge...16
3.8 Conducted Spurious Emission...17
3.9 Frequency Stability...18
4 RADIATED TEST ITEMS...19
4.1 Measuring Instruments...19
4.2 Test Setup...19
4.3 Test Result of Radiated Test...19
4.4 Radiated Spurious Emission...20
5 LIST OF MEASURING EQUIPMENT...21
6 UNCERTAINTY OF EVALUATION...22
APPENDIX A. TEST RESULTS OF CONDUCTED TEST
APPENDIX B. TEST RESULTS OF RADIATED TEST
APPENDIX C. TEST SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

| Report Section | FCC Rule | Description | Limit | Result | Remark |
|----------------|-------------------------|---|-------------------------------------|--------|---|
| 3.4 | §2.1046 | Conducted Output Power | Reporting Only | PASS | - |
| | §27.50(h)(2) | Equivalent Isotropic Radiated Power (5G NR n41) | EIRP < 2Watt | | |
| 3.5 | N/A | Peak-to-Average Ratio | <13 dB | PASS | - |
| 3.6 | §2.1049 | Occupied Bandwidth | Reporting Only | PASS | - |
| 3.7 | §27.53(m)(4) | Conducted Band Edge Measurement (5G NR n41) | §27.53(m)(4) | PASS | - |
| 3.8 | §2.1051 §27.53(m)(4) | Conducted Spurious Emission (5G NR n41) | < 55+10log ₁₀ (P[Watts]) | PASS | - |
| 3.9 | §2.1055 §27.54 | Frequency Stability Temperature & Voltage | Within Authorized Band | PASS | - |
| 4.4 | §2.1053 §27.53(m)(4) | Radiated Spurious Emission (5G NR n41) | < 55+10log ₁₀ (P[Watts]) | PASS | Under limit 19.77 dB at 7650.000 MHz |



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

| Product Feature | |
|---------------------------------|--|
| Equipment | Mobile Cellular Phone |
| Brand Name | Motorola |
| Model Name | XT2075-3 |
| FCC ID | IHDT56ZC3 |
| EUT supports Radios application | CDMA/GSM/WCDMA/LTE/5G NR/NFC WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE GNSS/FM Receiver |
| IMEI Code | Conducted : 353617110019738/353617110019746 Radiation : 353617110020058/353617110020066 |
| HW Version | DVT2 |
| SW Version | QPN30.33-9 |
| EUT Stage | Identical Prototype |

Remark:

1. Only 5G NR bands are tested in this report, all the other RF bands are tested in the other reports separately.
2. For modulation of CP-OFDM and DFT-s-OFDM output power measurement, according to the maximum power of CP-OFDM is lower than DFT-s-OFDM modulation, therefore, CP-OFDM measurement is unnecessary. We always chose higher power (DFT-s-OFDM modulation) to perform all tests.
3. 5G NR supports SA mode.

1.4 Product Specification of Equipment Under Test

| Standards-related Product Specification | |
|---|---|
| Tx Frequency | 5G NR n41: 2506 MHz ~ 2680 MHz |
| Rx Frequency | 5G NR n41: 2506 MHz ~ 2680 MHz |
| Bandwidth | n41 : 20MHz / 40MHz / 50MHz / 60MHz / 80MHz / 90MHz / 100MHz |
| SCS | 30kHz |
| Maximum Output Power to Antenna | 5G NR n41 : 22.87 dBm |
| Antenna Gain | 5G NR n41 : -3.00 dBi |
| Type of Modulation | CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM |

1.5 Specification of Accessory

| Specification of Accessory | | | | |
|----------------------------|------------|---------------------|------------|-------------------|
| AC Adapter 1(US) | Brand Name | Motorola (Chenyang) | Model Name | MC-201 |
| AC Adapter 1(EU) | Brand Name | Motorola (Chenyang) | Model Name | MC-202 |
| AC Adapter 1(UK) | Brand Name | Motorola (Chenyang) | Model Name | MC-203 |
| AC Adapter 1(AU) | Brand Name | Motorola (Chenyang) | Model Name | MC-205 |
| AC Adapter 2(US) | Brand Name | Motorola (Acbel) | Model Name | MC-201 |
| AC Adapter 2(EU) | Brand Name | Motorola (Acbel) | Model Name | MC-202 |
| AC Adapter 2(UK) | Brand Name | Motorola (Acbel) | Model Name | MC-203 |
| AC Adapter 2(AU) | Brand Name | Motorola (Acbel) | Model Name | MC-205 |
| Battery | Brand Name | Motorola(Amperex) | Model Name | LZ50 |
| Earphone | Brand Name | Motorola(Lyand) | Model Name | MH191(SH38C81577) |
| USB Cable 1 | Brand Name | Motorola (Luxshare) | Model Name | SC18C24368 |
| USB Cable 2 | Brand Name | Motorola (Saibao) | Model Name | SC18C24367 |

1.6 Modification of EUT

No modifications are made to the EUT during all test items.



1.7 Maximum EIRP Power, Frequency Tolerance, and Emission Designator

| 5G NR n41 | | PI/2 BPSK | | QPSK | |
|---------------------------|-----------------------|------------------------------|-----------------|------------------------------|-----------------|
| BW (MHz) | Frequency Range (MHz) | Emission Designator (99%OBW) | Maximum EIRP(W) | Emission Designator (99%OBW) | Maximum EIRP(W) |
| 20 | 2506.02 ~ 2679.99 | 18M7F9W | 0.0923 | 18M5G7D | 0.0971 |
| 40 | 2516.01 ~ 2670.00 | 36M3F9W | 0.0967 | 36M8G7D | 0.0947 |
| 50 | 2521.02 ~ 2664.99 | 46M5F9W | 0.0919 | 46M6G7D | 0.0902 |
| 60 | 2526.00 ~ 2659.98 | 60M1F9W | 0.0896 | 58M1G7D | 0.0919 |
| 80 | 2536.02 ~ 2649.99 | 77M2F9W | 0.0919 | 77M7G7D | 0.0884 |
| 90 | 2541.00 ~ 2644.98 | 87M9F9W | 0.0904 | 87M8G7D | 0.0896 |
| 100 | 2546.01 ~ 2640.00 | 98M5F9W | 0.0880 | 98M3G7D | 0.0871 |
| 5G NR n41 | | 16QAM | | 64QAM | |
| BW (MHz) | Frequency Range (MHz) | Emission Designator (99%OBW) | Maximum EIRP(W) | Emission Designator (99%OBW) | Maximum EIRP(W) |
| 20 | 2506.02 ~ 2679.99 | 18M7W7D | 0.0580 | 18M7W7D | 0.0750 |
| 40 | 2516.01 ~ 2670.00 | 36M2W7D | 0.0551 | 36M8W7D | 0.0694 |
| 50 | 2521.02 ~ 2664.99 | 46M3W7D | 0.0904 | 46M2W7D | 0.0747 |
| 60 | 2526.00 ~ 2659.98 | 59M8W7D | 0.0873 | 59M9W7D | 0.0598 |
| 80 | 2536.02 ~ 2649.99 | 77M8W7D | 0.0896 | 76M7W7D | 0.0342 |
| 90 | 2541.00 ~ 2644.98 | 87M8W7D | 0.0858 | 87M2W7D | 0.0629 |
| 100 | 2546.01 ~ 2640.00 | 98M3W7D | 0.0863 | 98M1W7D | 0.0666 |
| 5G NR n41 | | 256QAM | | | |
| BW (MHz) | Frequency Range (MHz) | Emission Designator (99%OBW) | | Maximum EIRP(W) | |
| 20 | 2506.02 ~ 2679.99 | 18M5W7D | | 0.0452 | |
| 40 | 2516.01 ~ 2670.00 | 36M2W7D | | 0.0449 | |
| 50 | 2521.02 ~ 2664.99 | 46M5W7D | | 0.0401 | |
| 60 | 2526.00 ~ 2659.98 | 58M9W7D | | 0.0420 | |
| 80 | 2536.02 ~ 2649.99 | 77M4W7D | | 0.0395 | |
| 90 | 2541.00 ~ 2644.98 | 87M6W7D | | 0.0410 | |
| 100 | 2546.01 ~ 2640.00 | 98M3W7D | | 0.0580 | |
| Frequency Tolerance (ppm) | | 0.0019 | | | |



1.8 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

| | | | |
|---------------------------|--|----------------------------|---------------------------------------|
| Test Firm | Sporton International (Kunshan) Inc. | | |
| Test Site Location | No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958 | | |
| Test Site No. | Sporton Site No. | FCC Designation No. | FCC Test Firm Registration No. |
| | 03CH04-KS TH01-KS | CN1257 | 314309 |

1.9 Test Software

| Item | Site | Manufacture | Name | Version |
|------|-----------|-------------|------|--------------|
| 1. | 03CH04-KS | AUDIX | E3 | 6.2009-8-24a |

1.10 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 27(M)
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

All test items were verified and recorded according to the standards and without any deviation during the test.




2 Test Configuration of Equipment Under Test

2.1 Test Mode


Antenna port conducted and radiated test items are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.

| | X Plane | Y Plane | Z Plane |
|--------------------------|---|---|---|
| Orthogonal Planes of EUT |  |  |  |

2.2 Connection Diagram of Test System

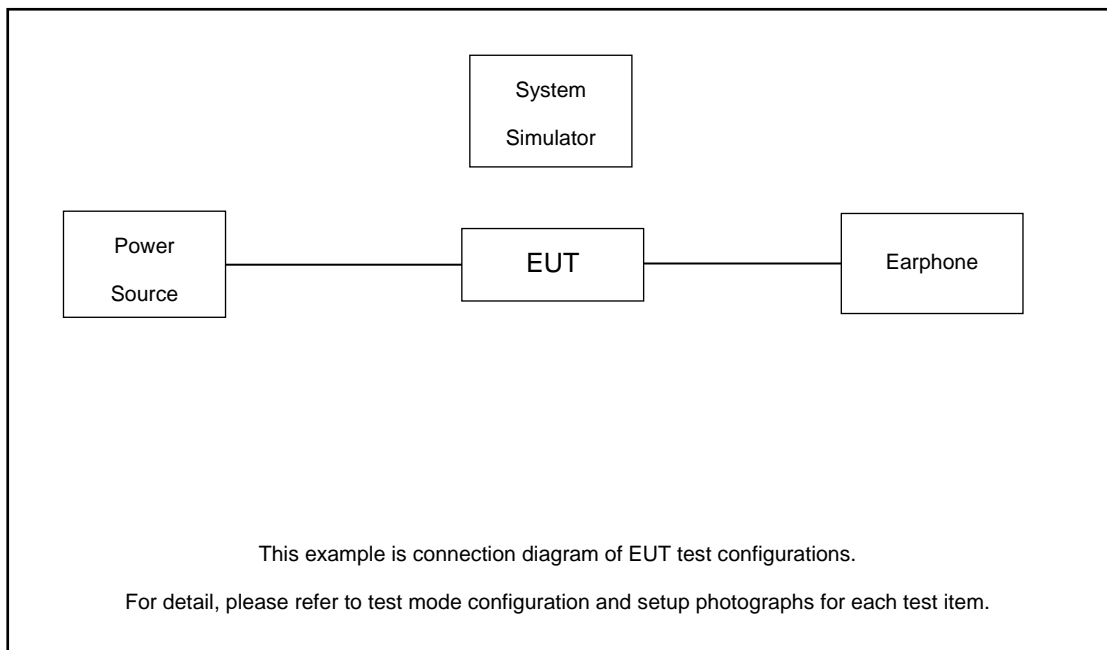



2.3 Support Unit used in test configuration and system

| Item | Equipment | Trade Name | Model No. | FCC ID | Data Cable | Power Cord |
|------|-----------------|------------|-----------|--------|------------|-------------------|
| 1. | DC Power Supply | GW | GPS-3030D | N/A | N/A | Unshielded, 1.8 m |
| 2. | NR Base Station | Anritsu | MT8000A | N/A | N/A | Unshielded, 1.8 m |

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

$$\text{Offset} = \text{RF cable loss.}$$

Following shows an offset computation example with cable loss 5.5dB.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 5.5 \text{ (dB)} \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

| 5G NR n41 Channel and Frequency List | | |
|--------------------------------------|---------|--------------------|
| NR Bandwidth (MHz) | Channel | NR Frequency (MHz) |
| 100 | Low | 2546.01 |
| | Mid. | 2592.99 |
| | High | 2640 |
| 90 | Low | 2541 |
| | Mid. | 2592.99 |
| | High | 2644.98 |
| 80 | Low | 2536.02 |
| | Mid. | 2592.99 |
| | High | 2649.99 |
| 60 | Low | 2526 |
| | Mid. | 2592.99 |
| | High | 2659.98 |
| 50 | Low | 2521.02 |
| | Mid. | 2592.99 |
| | High | 2664.99 |
| 40 | Low | 2516.01 |
| | Mid. | 2592.99 |
| | High | 2670 |
| 20 | Low | 2506.02 |
| | Mid. | 2592.99 |
| | High | 2679.99 |

3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power



3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

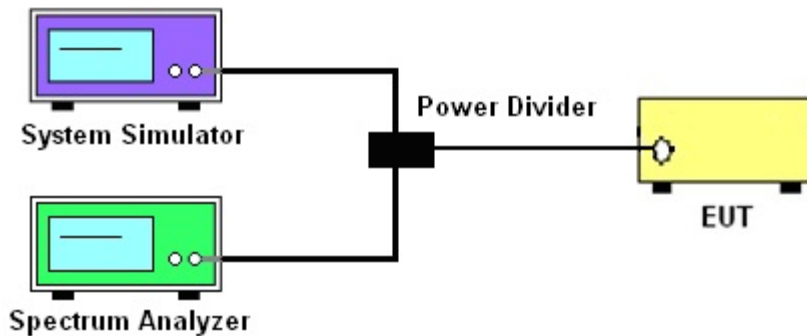

3.2.3 Frequency Stability

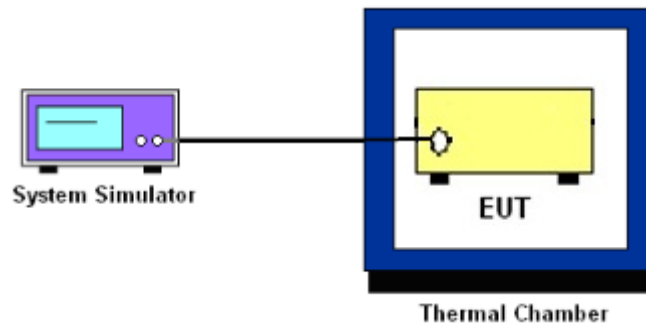

3.3 Test Result of Conducted Test

Please refer to Appendix A.



3.4 Conducted Output Power and EIRP

3.4.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The EIRP of mobile transmitters must not exceed 2 Watts for 5G NR n41.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.



3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26-2015.
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the RBW = 1MHz, VBW = 3MHz, Peak detector in spectrum analyzer.
4. Set the RBW = 1MHz, VBW = 3MHz, RMS detector in spectrum analyzer.
5. Record difference between steps 3 and 4 as Peak to Average Ratio.



3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

27.53(m)(4)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW \geq 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
6. Set spectrum analyzer with RMS detector.
7. Offset has included the duty factor for 5G NR n41. Duty factor $=10 \log (1/x)$, where x is the measured duty cycle
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. Checked that all the results comply with the emission limit line.

Example:

$$\begin{aligned} & \text{The limit line is derived from } 43 + 10\log(P)\text{dB below the transmitter power P(Watts)} \\ & = P(W) - [43 + 10\log(P)] \text{ (dB)} \\ & = [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} = -13\text{dBm.} \end{aligned}$$

10. For 5G NR n41, the other 40 dB, and 55 dB have additionally applied same calculation above.



3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

For 5G NR n41:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Offset has included the duty factor for 5G NR n41. Duty factor = $10 \log (1/x)$, where x is the measured duty cycle
9. Taking the record of maximum spurious emission.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
11. The limit line is derived from $43 + 10 \log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [43 + 10 \log(P)]$ (dB)
= $[30 + 10 \log(P)]$ (dBm) - $[43 + 10 \log(P)]$ (dB)
= -13dBm.
12. For 5G NR n41
The limit line is derived from $55 + 10 \log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [55 + 10 \log(P)]$ (dB)
= $[30 + 10 \log(P)]$ (dBm) - $[55 + 10 \log(P)]$ (dB)
= -25dBm.



3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz

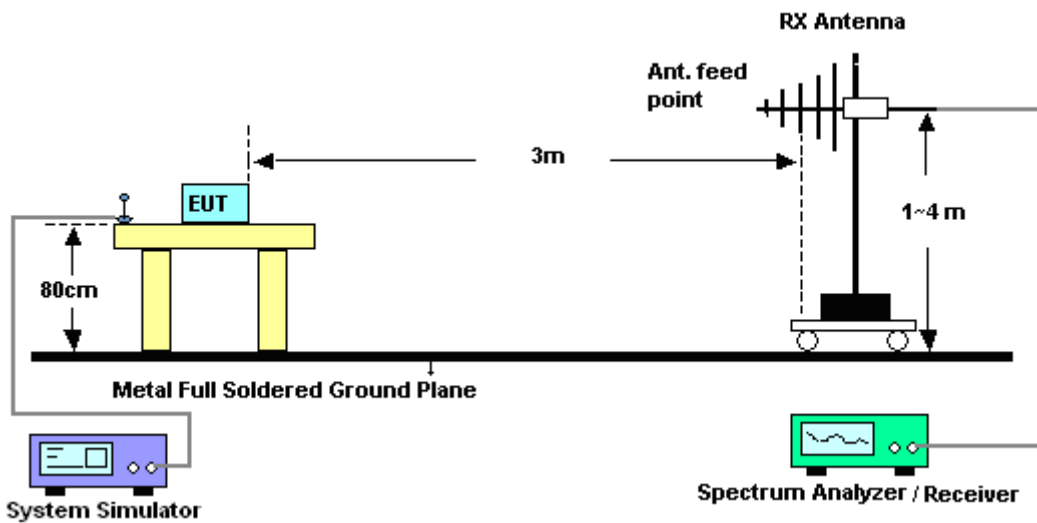

4.2.2 For radiated test above 1GHz

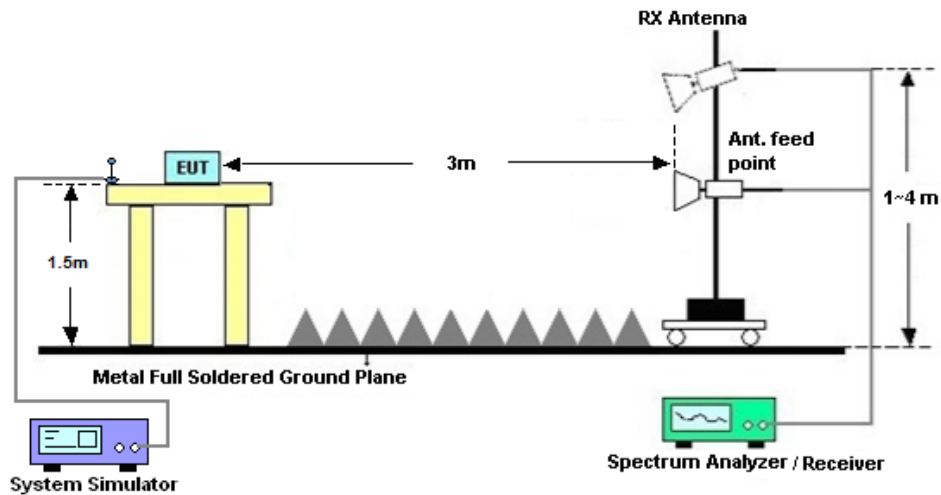

4.3 Test Result of Radiated Test

Please refer to Appendix B.



4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26.

For 5G NR n41

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$

13. For 5G NR n41:

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)
The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Test Date | Due Date | Remark |
|-----------------------|--------------|--------------------------------|------------|----------------------|------------------|-------------------------------|---------------|-----------------------|
| Spectrum Analyzer | R&S | FSV40 | 101040 | 10Hz~40GHz | Nov. 02, 2019 | May 28, 2020~ May 30, 2020 | Nov. 01, 2020 | Conducted (TH01-KS) |
| Thermal Chamber | Ten Billion | TTC-B3S | TBN-960502 | -40~+150°C | Oct. 28, 2019 | May 28, 2020~ May 30, 2020 | Oct. 27, 2020 | Conducted (TH01-KS) |
| EXA Spectrum Analyzer | Keysight | N9010A | MY55150244 | 10Hz-44G,MAX 30dB | Apr. 15, 2020 | May 21, 2020 | Apr. 14, 2021 | Radiation (03CH04-KS) |
| Bilog Antenna | TeseQ | CBL6111D | 49922 | 30MHz-1GHz | May 30, 2019 | May 21, 2020 | May 29, 2020 | Radiation (03CH04-KS) |
| Horn Antenna | Schwarzbeck | BBHA9120D | 1356 | 1GHz~18GHz | Apr. 20, 2020 | May 21, 2020 | Apr. 19, 2021 | Radiation (03CH04-KS) |
| SHF-EHF Horn | Com-power | AH-840 | 101115 | 18GHz~40GHz | Nov. 10, 2019 | May 21, 2020 | Nov. 09, 2020 | Radiation (03CH04-KS) |
| Amplifier | SONOMA | 310N | 187289 | 9KHz-1GHz | Aug. 06, 2019 | May 21, 2020 | Aug. 05, 2020 | Radiation (03CH04-KS) |
| Amplifier | MITEQ | EM18G40G GA | 060728 | 18~40GHz | Jan. 08, 2020 | May 21, 2020 | Jan. 07, 2021 | Radiation (03CH04-KS) |
| high gain Amplifier | MITEQ | AMF-7D-00 101800-30-1 QP | 2025788 | 1Ghz-18Ghz | Aug. 16, 2019 | May 21, 2020 | Aug. 15, 2020 | Radiation (03CH04-KS) |
| Amplifier | Keysight | 83017A | MY57280106 | 500MHz~26.5GHz | Oct. 15, 2019 | May 21, 2020 | Oct. 14, 2020 | Radiation (03CH04-KS) |
| AC Power Source | Chroma | 61601 | F104090004 | N/A | NCR | May 21, 2020 | NCR | Radiation (03CH04-KS) |
| Turn Table | ChamPro | EM 1000-T | 060762-T | 0~360 degree | NCR | May 21, 2020 | NCR | Radiation (03CH04-KS) |
| Antenna Mast | ChamPro | EM 1000-A | 060762-A | 1 m~4 m | NCR | May 21, 2020 | NCR | Radiation (03CH04-KS) |

NCR: No Calibration Required



6 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

| | |
|---|-------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 3.3dB |
|---|-------|

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

| | |
|---|-------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 2.8dB |
|---|-------|

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

| | |
|---|-------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 2.8dB |
|---|-------|



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power and EIRP)

Modulation CP-OFDM

| NR n41 Maximum Average Power [dBm] | | | | | | |
|------------------------------------|---------|-----------|---------|--------|--------|---------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest |
| 20 | 1 | 1 | QPSK | 21.76 | 21.63 | 21.82 |
| 20 | 1 | 49 | | 21.63 | 21.52 | 21.65 |
| 20 | 25 | 12 | | 21.85 | 21.87 | 21.89 |
| 20 | 1 | 0 | | 20.69 | 20.78 | 20.85 |
| 20 | 1 | 50 | | 20.55 | 20.63 | 20.68 |
| 20 | 51 | 0 | | 20.63 | 20.58 | 20.65 |
| 20 | 1 | 1 | 16-QAM | 21.22 | 21.13 | 21.19 |
| 20 | 1 | 49 | | 21.52 | 21.46 | 21.55 |
| 20 | 25 | 12 | | 21.45 | 21.39 | 21.46 |
| 20 | 1 | 0 | | 21.32 | 21.28 | 21.36 |
| 20 | 1 | 50 | | 20.33 | 20.26 | 20.41 |
| 20 | 51 | 0 | | 20.63 | 20.53 | 20.44 |
| 20 | 1 | 1 | 64-QAM | 19.55 | 19.52 | 19.62 |
| 20 | 1 | 49 | | 19.44 | 19.36 | 19.52 |
| 20 | 25 | 12 | | 19.85 | 19.82 | 19.78 |
| 20 | 1 | 0 | | 19.78 | 19.73 | 19.85 |
| 20 | 1 | 50 | | 19.26 | 19.22 | 19.36 |
| 20 | 51 | 0 | | 20.11 | 20.13 | 20.21 |
| 20 | 1 | 1 | 256-QAM | 17.23 | 17.26 | 19.31 |
| 20 | 1 | 49 | | 17.02 | 17.15 | 17.25 |
| 20 | 25 | 12 | | 17.11 | 17.16 | 17.26 |
| 20 | 1 | 0 | | 17.42 | 17.56 | 17.44 |
| 20 | 1 | 50 | | 16.83 | 16.78 | 16.87 |
| 20 | 51 | 0 | | 17.33 | 17.36 | 17.44 |



| NR n41 Maximum Average Power [dBm] | | | | | | |
|------------------------------------|---------|-----------|---------|--------|--------|---------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest |
| 40 | 1 | 1 | QPSK | 21.93 | 21.86 | 21.74 |
| 40 | 1 | 104 | | 21.96 | 21.78 | 21.63 |
| 40 | 53 | 26 | | 21.95 | 21.89 | 21.77 |
| 40 | 1 | 0 | | 20.67 | 20.63 | 20.56 |
| 40 | 1 | 105 | | 20.56 | 20.58 | 20.63 |
| 40 | 106 | 0 | | 20.66 | 20.64 | 20.55 |
| 40 | 1 | 1 | 16-QAM | 21.72 | 21.56 | 21.52 |
| 40 | 1 | 104 | | 21.44 | 21.32 | 21.29 |
| 40 | 53 | 26 | | 21.53 | 21.36 | 21.41 |
| 40 | 1 | 0 | | 21.25 | 21.33 | 21.32 |
| 40 | 1 | 105 | | 20.36 | 20.21 | 20.29 |
| 40 | 106 | 0 | | 20.69 | 20.78 | 20.69 |
| 40 | 1 | 1 | 64-QAM | 19.51 | 19.44 | 19.56 |
| 40 | 1 | 104 | | 19.53 | 19.36 | 19.44 |
| 40 | 53 | 26 | | 19.93 | 19.85 | 19.78 |
| 40 | 1 | 0 | | 19.86 | 19.69 | 19.65 |
| 40 | 1 | 105 | | 19.33 | 19.26 | 19.29 |
| 40 | 106 | 0 | | 20.16 | 20.23 | 20.16 |
| 40 | 1 | 1 | 256-QAM | 17.21 | 17.32 | 17.29 |
| 40 | 1 | 104 | | 16.98 | 16.75 | 16.58 |
| 40 | 53 | 26 | | 17.06 | 17.21 | 17.25 |
| 40 | 1 | 0 | | 17.55 | 17.62 | 17.77 |
| 40 | 1 | 105 | | 16.85 | 17.03 | 17.13 |
| 40 | 106 | 0 | | 17.31 | 17.36 | 17.45 |



| NR n41 Maximum Average Power [dBm] | | | | | | |
|------------------------------------|---------|-----------|---------|--------|--------|---------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest |
| 50 | 1 | 1 | QPSK | 21.88 | 21.78 | 21.75 |
| 50 | 1 | 131 | | 21.44 | 21.36 | 21.39 |
| 50 | 67 | 33 | | 21.76 | 21.62 | 21.56 |
| 50 | 1 | 0 | | 20.66 | 20.53 | 20.44 |
| 50 | 1 | 132 | | 20.23 | 20.25 | 20.31 |
| 50 | 133 | 0 | | 20.06 | 20.12 | 20.15 |
| 50 | 1 | 1 | 16-QAM | 21.32 | 21.26 | 21.44 |
| 50 | 1 | 131 | | 21.03 | 21.18 | 21.22 |
| 50 | 67 | 33 | | 21.25 | 21.33 | 21.54 |
| 50 | 1 | 0 | | 20.63 | 20.56 | 20.62 |
| 50 | 1 | 132 | | 20.13 | 20.26 | 20.33 |
| 50 | 133 | 0 | | 20.44 | 20.56 | 20.54 |
| 50 | 1 | 1 | 64-QAM | 19.62 | 19.58 | 19.68 |
| 50 | 1 | 131 | | 19.03 | 19.11 | 19.15 |
| 50 | 67 | 33 | | 19.59 | 19.63 | 19.75 |
| 50 | 1 | 0 | | 19.56 | 19.62 | 19.77 |
| 50 | 1 | 132 | | 18.93 | 18.78 | 18.79 |
| 50 | 133 | 0 | | 19.79 | 19.85 | 19.69 |
| 50 | 1 | 1 | 256-QAM | 17.03 | 17.12 | 17.32 |
| 50 | 1 | 131 | | 16.52 | 16.65 | 16.78 |
| 50 | 67 | 33 | | 16.95 | 17.03 | 17.12 |
| 50 | 1 | 0 | | 16.81 | 16.93 | 16.95 |
| 50 | 1 | 132 | | 16.71 | 16.78 | 16.86 |
| 50 | 133 | 0 | | 17.03 | 17.13 | 17.22 |



| NR n41 Maximum Average Power [dBm] | | | | | | |
|------------------------------------|---------|-----------|---------|--------|--------|---------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest |
| 60 | 1 | 1 | QPSK | 21.76 | 21.63 | 21.81 |
| 60 | 1 | 160 | | 21.84 | 21.52 | 21.88 |
| 60 | 81 | 40 | | 21.81 | 21.47 | 21.93 |
| 60 | 1 | 0 | | 20.64 | 20.42 | 20.52 |
| 60 | 1 | 161 | | 20.67 | 20.64 | 20.51 |
| 60 | 162 | 0 | | 21.52 | 21.25 | 21.34 |
| 60 | 1 | 1 | 16-QAM | 21.61 | 21.34 | 21.58 |
| 60 | 1 | 160 | | 21.35 | 21.55 | 21.68 |
| 60 | 81 | 40 | | 21.28 | 21.30 | 21.54 |
| 60 | 1 | 0 | | 21.12 | 20.56 | 20.94 |
| 60 | 1 | 161 | | 20.67 | 20.31 | 20.64 |
| 60 | 162 | 0 | | 20.64 | 20.51 | 20.44 |
| 60 | 1 | 1 | 64-QAM | 19.84 | 19.83 | 19.72 |
| 60 | 1 | 160 | | 19.65 | 19.61 | 19.86 |
| 60 | 81 | 40 | | 19.69 | 19.57 | 19.54 |
| 60 | 1 | 0 | | 19.54 | 19.69 | 19.26 |
| 60 | 1 | 161 | | 19.63 | 19.82 | 19.43 |
| 60 | 162 | 0 | | 19.34 | 19.26 | 19.72 |
| 60 | 1 | 1 | 256-QAM | 17.10 | 16.89 | 16.89 |
| 60 | 1 | 160 | | 17.02 | 16.80 | 16.44 |
| 60 | 81 | 40 | | 16.58 | 17.12 | 17.20 |
| 60 | 1 | 0 | | 16.95 | 17.04 | 16.73 |
| 60 | 1 | 161 | | 17.14 | 16.93 | 16.54 |
| 60 | 162 | 0 | | 16.86 | 17.21 | 16.82 |



| NR n41 Maximum Average Power [dBm] | | | | | | |
|------------------------------------|---------|-----------|---------|--------|--------|---------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest |
| 80 | 1 | 1 | QPSK | 21.64 | 21.57 | 21.82 |
| 80 | 1 | 215 | | 21.68 | 21.66 | 21.67 |
| 80 | 109 | 54 | | 21.89 | 21.74 | 21.92 |
| 80 | 1 | 0 | | 21.92 | 20.47 | 21.56 |
| 80 | 1 | 216 | | 20.65 | 20.23 | 20.63 |
| 80 | 217 | 0 | | 20.51 | 20.40 | 20.64 |
| 80 | 1 | 1 | 16-QAM | 21.56 | 21.31 | 21.23 |
| 80 | 1 | 215 | | 21.51 | 21.54 | 21.64 |
| 80 | 109 | 54 | | 21.36 | 21.29 | 21.66 |
| 80 | 1 | 0 | | 20.51 | 20.40 | 20.24 |
| 80 | 1 | 216 | | 20.26 | 20.24 | 20.64 |
| 80 | 217 | 0 | | 20.17 | 20.35 | 20.37 |
| 80 | 1 | 1 | 64-QAM | 19.82 | 19.69 | 19.82 |
| 80 | 1 | 215 | | 19.54 | 19.45 | 19.55 |
| 80 | 109 | 54 | | 19.54 | 19.62 | 19.54 |
| 80 | 1 | 0 | | 19.62 | 19.57 | 19.72 |
| 80 | 1 | 216 | | 19.71 | 19.42 | 19.35 |
| 80 | 217 | 0 | | 19.58 | 19.71 | 19.77 |
| 80 | 1 | 1 | 256-QAM | 16.91 | 16.80 | 16.88 |
| 80 | 1 | 215 | | 16.76 | 16.91 | 16.41 |
| 80 | 109 | 54 | | 16.61 | 17.12 | 17.23 |
| 80 | 1 | 0 | | 17.14 | 17.23 | 17.16 |
| 80 | 1 | 216 | | 16.82 | 16.84 | 16.96 |
| 80 | 217 | 0 | | 16.94 | 16.97 | 16.82 |



| NR n41 Maximum Average Power [dBm] | | | | | | |
|------------------------------------|---------|-----------|---------|--------|--------|---------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest |
| 90 | 1 | 1 | QPSK | 21.87 | 21.68 | 21.96 |
| 90 | 1 | 243 | | 21.35 | 21.64 | 21.51 |
| 90 | 123 | 61 | | 21.52 | 21.57 | 21.51 |
| 90 | 1 | 0 | | 20.58 | 20.38 | 20.64 |
| 90 | 1 | 244 | | 21.37 | 21.64 | 21.42 |
| 90 | 245 | 0 | | 20.01 | 20.45 | 20.26 |
| 90 | 1 | 1 | 16-QAM | 21.50 | 21.51 | 21.54 |
| 90 | 1 | 243 | | 21.29 | 21.34 | 21.61 |
| 90 | 123 | 61 | | 21.13 | 21.11 | 21.35 |
| 90 | 1 | 0 | | 20.61 | 20.64 | 20.81 |
| 90 | 1 | 244 | | 21.25 | 21.53 | 20.51 |
| 90 | 245 | 0 | | 20.16 | 21.31 | 20.34 |
| 90 | 1 | 1 | 64-QAM | 19.63 | 19.87 | 19.82 |
| 90 | 1 | 243 | | 19.37 | 19.64 | 19.51 |
| 90 | 123 | 61 | | 19.47 | 19.89 | 19.54 |
| 90 | 1 | 0 | | 19.60 | 19.56 | 19.64 |
| 90 | 1 | 244 | | 19.32 | 19.72 | 19.53 |
| 90 | 245 | 0 | | 19.72 | 19.40 | 19.83 |
| 90 | 1 | 1 | 256-QAM | 17.10 | 17.15 | 16.87 |
| 90 | 1 | 243 | | 16.85 | 16.75 | 16.66 |
| 90 | 123 | 61 | | 16.93 | 16.83 | 17.10 |
| 90 | 1 | 0 | | 16.89 | 16.98 | 16.80 |
| 90 | 1 | 244 | | 17.06 | 17.14 | 16.82 |
| 90 | 245 | 0 | | 17.05 | 17.09 | 16.72 |



| NR n41 Maximum Average Power [dBm] | | | | | | |
|------------------------------------|---------|-----------|---------|--------|--------|---------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest |
| 100 | 1 | 1 | QPSK | 21.91 | 21.63 | 21.96 |
| 100 | 1 | 271 | | 21.88 | 21.58 | 21.84 |
| 100 | 137 | 68 | | 21.82 | 21.73 | 21.70 |
| 100 | 1 | 0 | | 20.69 | 20.64 | 20.61 |
| 100 | 1 | 272 | | 20.61 | 20.52 | 20.41 |
| 100 | 273 | 0 | | 20.51 | 21.34 | 20.44 |
| 100 | 1 | 1 | 16-QAM | 21.64 | 21.36 | 21.56 |
| 100 | 1 | 271 | | 21.69 | 21.41 | 21.51 |
| 100 | 137 | 68 | | 21.51 | 21.54 | 21.37 |
| 100 | 1 | 0 | | 20.92 | 20.72 | 20.80 |
| 100 | 1 | 272 | | 20.55 | 20.34 | 20.63 |
| 100 | 273 | 0 | | 20.48 | 20.17 | 20.57 |
| 100 | 1 | 1 | 64-QAM | 19.66 | 19.53 | 19.58 |
| 100 | 1 | 271 | | 19.54 | 19.35 | 19.35 |
| 100 | 137 | 68 | | 19.73 | 19.66 | 19.61 |
| 100 | 1 | 0 | | 19.58 | 19.71 | 19.51 |
| 100 | 1 | 272 | | 19.32 | 19.15 | 19.44 |
| 100 | 273 | 0 | | 19.57 | 19.61 | 19.40 |
| 100 | 1 | 1 | 256-QAM | 16.74 | 16.45 | 16.87 |
| 100 | 1 | 271 | | 16.91 | 16.86 | 16.87 |
| 100 | 137 | 68 | | 16.82 | 16.90 | 16.79 |
| 100 | 1 | 0 | | 17.13 | 17.22 | 16.96 |
| 100 | 1 | 272 | | 16.59 | 17.07 | 17.16 |
| 100 | 273 | 0 | | 16.86 | 17.13 | 16.89 |



Modulation DFT-s OFDM

| NR n41 Maximum Average Power [dBm] | | | | | | |
|------------------------------------|---------|-----------|-----------|--------|--------|---------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest |
| 20 | 1 | 1 | PI/2 BPSK | 22.52 | 22.41 | 22.36 |
| 20 | 1 | 49 | | 22.32 | 22.52 | 22.65 |
| 20 | 25 | 12 | | 22.51 | 22.63 | 22.42 |
| 20 | 1 | 0 | | 22.63 | 22.55 | 22.32 |
| 20 | 1 | 50 | | 22.26 | 22.31 | 22.42 |
| 20 | 50 | 0 | | 22.41 | 22.55 | 22.63 |
| 20 | 1 | 1 | QPSK | 22.68 | 22.78 | 22.85 |
| 20 | 1 | 49 | | 22.44 | 22.52 | 22.54 |
| 20 | 25 | 12 | | 22.32 | 22.26 | 22.36 |
| 20 | 1 | 0 | | 22.65 | 22.74 | 22.87 |
| 20 | 1 | 50 | | 22.52 | 22.36 | 22.56 |
| 20 | 50 | 0 | | 22.55 | 22.45 | 22.52 |
| 20 | 1 | 1 | 16-QAM | 22.61 | 22.74 | 22.87 |
| 20 | 1 | 49 | | 22.42 | 22.41 | 22.58 |
| 20 | 25 | 12 | | 22.47 | 22.53 | 22.36 |
| 20 | 1 | 0 | | 22.06 | 22.12 | 22.19 |
| 20 | 1 | 50 | | 21.55 | 21.48 | 21.52 |
| 20 | 50 | 0 | | 21.66 | 21.75 | 21.63 |
| 20 | 1 | 1 | 64-QAM | 20.63 | 20.52 | 20.36 |
| 20 | 1 | 49 | | 20.65 | 20.61 | 20.55 |
| 20 | 25 | 12 | | 20.93 | 20.96 | 20.89 |
| 20 | 1 | 0 | | 20.59 | 20.63 | 20.75 |
| 20 | 1 | 50 | | 20.32 | 20.53 | 20.39 |
| 20 | 50 | 0 | | 21.33 | 21.25 | 21.32 |
| 20 | 1 | 1 | 256-QAM | 19.21 | 19.36 | 19.25 |
| 20 | 1 | 49 | | 18.78 | 18.87 | 18.96 |
| 20 | 25 | 12 | | 18.96 | 18.85 | 18.63 |
| 20 | 1 | 0 | | 19.16 | 19.23 | 19.19 |
| 20 | 1 | 50 | | 18.76 | 18.85 | 18.65 |
| 20 | 50 | 0 | | 19.33 | 19.41 | 19.55 |



| NR n41 Maximum Average Power [dBm] | | | | | | |
|------------------------------------|---------|-----------|-----------|--------|--------|---------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest |
| 40 | 1 | 1 | PI/2 BPSK | 22.69 | 22.68 | 22.73 |
| 40 | 1 | 104 | | 22.36 | 22.52 | 22.62 |
| 40 | 50 | 25 | | 22.63 | 22.71 | 22.53 |
| 40 | 1 | 0 | | 22.66 | 22.78 | 22.85 |
| 40 | 1 | 105 | | 22.36 | 22.25 | 22.41 |
| 40 | 100 | 0 | | 22.44 | 22.52 | 22.36 |
| 40 | 1 | 1 | QPSK | 22.76 | 22.73 | 22.52 |
| 40 | 1 | 104 | | 22.56 | 22.36 | 22.44 |
| 40 | 50 | 25 | | 22.44 | 22.48 | 22.58 |
| 40 | 1 | 0 | | 22.73 | 22.69 | 22.63 |
| 40 | 1 | 105 | | 22.55 | 22.46 | 22.62 |
| 40 | 100 | 0 | | 22.56 | 22.53 | 22.36 |
| 40 | 1 | 1 | 16-QAM | 22.63 | 22.77 | 22.52 |
| 40 | 1 | 104 | | 22.46 | 22.53 | 22.49 |
| 40 | 50 | 25 | | 22.45 | 22.41 | 22.52 |
| 40 | 1 | 0 | | 22.16 | 22.21 | 22.32 |
| 40 | 1 | 105 | | 21.56 | 21.63 | 21.71 |
| 40 | 100 | 0 | | 21.63 | 21.52 | 21.73 |
| 40 | 1 | 1 | 64-QAM | 20.66 | 20.74 | 20.82 |
| 40 | 1 | 104 | | 20.63 | 20.78 | 20.71 |
| 40 | 50 | 25 | | 20.98 | 20.85 | 20.83 |
| 40 | 1 | 0 | | 20.58 | 20.63 | 20.55 |
| 40 | 1 | 105 | | 20.32 | 20.44 | 20.36 |
| 40 | 100 | 0 | | 21.23 | 21.32 | 21.41 |
| 40 | 1 | 1 | 256-QAM | 19.18 | 19.23 | 19.32 |
| 40 | 1 | 104 | | 18.76 | 18.86 | 18.93 |
| 40 | 50 | 25 | | 18.97 | 18.87 | 18.85 |
| 40 | 1 | 0 | | 19.13 | 19.25 | 19.36 |
| 40 | 1 | 105 | | 18.77 | 18.63 | 18.79 |
| 40 | 100 | 0 | | 19.36 | 19.42 | 19.52 |



| NR n41 Maximum Average Power [dBm] | | | | | | |
|------------------------------------|---------|-----------|-----------|--------|--------|---------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest |
| 50 | 1 | 1 | PI/2 BPSK | 22.52 | 22.47 | 22.63 |
| 50 | 1 | 131 | | 22.21 | 22.16 | 22.25 |
| 50 | 64 | 32 | | 22.36 | 22.23 | 22.13 |
| 50 | 1 | 0 | | 22.44 | 22.36 | 22.44 |
| 50 | 1 | 132 | | 22.22 | 22.10 | 22.25 |
| 50 | 128 | 0 | | 22.23 | 22.15 | 22.32 |
| 50 | 1 | 1 | QPSK | 22.55 | 22.43 | 22.52 |
| 50 | 1 | 131 | | 22.12 | 22.03 | 22.16 |
| 50 | 64 | 32 | | 22.33 | 22.26 | 22.34 |
| 50 | 1 | 0 | | 22.16 | 22.30 | 22.25 |
| 50 | 1 | 132 | | 22.06 | 22.18 | 22.31 |
| 50 | 128 | 0 | | 22.26 | 22.41 | 22.52 |
| 50 | 1 | 1 | 16-QAM | 22.42 | 22.56 | 22.43 |
| 50 | 1 | 131 | | 21.96 | 21.85 | 21.77 |
| 50 | 64 | 32 | | 22.32 | 22.26 | 22.41 |
| 50 | 1 | 0 | | 21.44 | 21.52 | 21.63 |
| 50 | 1 | 132 | | 21.23 | 21.21 | 21.25 |
| 50 | 128 | 0 | | 21.26 | 21.35 | 21.42 |
| 50 | 1 | 1 | 64-QAM | 20.33 | 20.41 | 20.36 |
| 50 | 1 | 131 | | 19.92 | 19.85 | 19.79 |
| 50 | 64 | 32 | | 20.55 | 20.45 | 20.36 |
| 50 | 1 | 0 | | 20.32 | 20.26 | 20.41 |
| 50 | 1 | 132 | | 20.01 | 20.16 | 20.21 |
| 50 | 128 | 0 | | 20.63 | 20.75 | 20.82 |
| 50 | 1 | 1 | 256-QAM | 18.96 | 18.93 | 18.85 |
| 50 | 1 | 131 | | 18.44 | 18.52 | 18.63 |
| 50 | 64 | 32 | | 18.72 | 18.63 | 18.82 |
| 50 | 1 | 0 | | 18.77 | 18.85 | 18.96 |
| 50 | 1 | 132 | | 18.44 | 18.59 | 18.65 |
| 50 | 128 | 0 | | 18.96 | 19.03 | 18.75 |



| NR n41 Maximum Average Power [dBm] | | | | | | |
|------------------------------------|---------|-----------|-----------|--------|--------|---------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest |
| 60 | 1 | 1 | PI/2 BPSK | 22.36 | 22.45 | 22.52 |
| 60 | 1 | 160 | | 22.12 | 22.23 | 22.32 |
| 60 | 81 | 40 | | 22.23 | 22.16 | 22.28 |
| 60 | 1 | 0 | | 22.16 | 22.21 | 22.31 |
| 60 | 1 | 161 | | 22.13 | 22.28 | 22.41 |
| 60 | 162 | 0 | | 22.19 | 22.32 | 22.15 |
| 60 | 1 | 1 | QPSK | 22.36 | 22.41 | 22.58 |
| 60 | 1 | 160 | | 22.03 | 22.15 | 22.21 |
| 60 | 81 | 40 | | 22.06 | 22.19 | 22.36 |
| 60 | 1 | 0 | | 22.52 | 22.63 | 22.41 |
| 60 | 1 | 161 | | 21.89 | 21.96 | 21.63 |
| 60 | 162 | 0 | | 22.23 | 22.32 | 22.33 |
| 60 | 1 | 1 | 16-QAM | 22.29 | 22.41 | 22.25 |
| 60 | 1 | 160 | | 21.78 | 21.85 | 21.82 |
| 60 | 81 | 40 | | 22.03 | 22.18 | 22.26 |
| 60 | 1 | 0 | | 21.32 | 21.41 | 21.52 |
| 60 | 1 | 161 | | 21.23 | 21.36 | 21.44 |
| 60 | 162 | 0 | | 21.02 | 21.13 | 21.26 |
| 60 | 1 | 1 | 64-QAM | 20.32 | 20.45 | 20.52 |
| 60 | 1 | 160 | | 20.13 | 20.32 | 20.41 |
| 60 | 81 | 40 | | 20.65 | 20.75 | 20.63 |
| 60 | 1 | 0 | | 20.23 | 20.36 | 20.54 |
| 60 | 1 | 161 | | 20.16 | 20.22 | 20.19 |
| 60 | 162 | 0 | | 20.56 | 20.63 | 20.76 |
| 60 | 1 | 1 | 256-QAM | 19.06 | 19.15 | 19.23 |
| 60 | 1 | 160 | | 18.56 | 18.63 | 18.78 |
| 60 | 81 | 40 | | 18.72 | 18.85 | 18.91 |
| 60 | 1 | 0 | | 18.85 | 18.72 | 18.82 |
| 60 | 1 | 161 | | 18.53 | 18.46 | 18.63 |
| 60 | 162 | 0 | | 18.77 | 18.63 | 18.75 |



| NR n41 Maximum Average Power [dBm] | | | | | | |
|------------------------------------|---------|-----------|-----------|--------|--------|---------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest |
| 80 | 1 | 1 | PI/2 BPSK | 22.56 | 22.63 | 22.46 |
| 80 | 1 | 215 | | 21.96 | 21.87 | 21.93 |
| 80 | 108 | 54 | | 22.23 | 22.16 | 22.32 |
| 80 | 1 | 0 | | 22.32 | 22.21 | 22.41 |
| 80 | 1 | 216 | | 22.13 | 22.32 | 22.25 |
| 80 | 216 | 0 | | 22.25 | 22.52 | 22.44 |
| 80 | 1 | 1 | QPSK | 22.32 | 22.41 | 22.26 |
| 80 | 1 | 215 | | 22.03 | 22.16 | 22.25 |
| 80 | 108 | 54 | | 22.16 | 22.25 | 22.41 |
| 80 | 1 | 0 | | 22.23 | 22.31 | 22.46 |
| 80 | 1 | 216 | | 22.15 | 22.23 | 22.32 |
| 80 | 216 | 0 | | 22.12 | 22.25 | 22.16 |
| 80 | 1 | 1 | 16-QAM | 22.32 | 22.41 | 22.52 |
| 80 | 1 | 215 | | 21.96 | 21.85 | 21.83 |
| 80 | 108 | 54 | | 22.03 | 22.16 | 22.23 |
| 80 | 1 | 0 | | 21.62 | 21.77 | 21.85 |
| 80 | 1 | 216 | | 21.22 | 21.36 | 21.56 |
| 80 | 216 | 0 | | 21.06 | 21.15 | 21.32 |
| 80 | 1 | 1 | 64-QAM | 20.36 | 20.41 | 20.52 |
| 80 | 1 | 215 | | 19.93 | 19.85 | 19.83 |
| 80 | 108 | 54 | | 20.68 | 20.75 | 20.63 |
| 80 | 1 | 0 | | 20.26 | 20.16 | 20.21 |
| 80 | 1 | 216 | | 20.15 | 20.32 | 20.32 |
| 80 | 216 | 0 | | 20.63 | 20.55 | 20.41 |
| 80 | 1 | 1 | 256-QAM | 18.85 | 18.75 | 18.73 |
| 80 | 1 | 215 | | 18.63 | 18.76 | 18.85 |
| 80 | 108 | 54 | | 18.86 | 18.63 | 18.96 |
| 80 | 1 | 0 | | 18.82 | 18.74 | 18.56 |
| 80 | 1 | 216 | | 18.63 | 18.58 | 18.44 |
| 80 | 216 | 0 | | 18.93 | 18.79 | 18.75 |



| NR n41 Maximum Average Power [dBm] | | | | | | |
|------------------------------------|---------|-----------|-----------|--------|--------|---------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest |
| 90 | 1 | 1 | PI/2 BPSK | 22.36 | 22.41 | 22.52 |
| 90 | 1 | 243 | | 22.06 | 21.96 | 22.16 |
| 90 | 120 | 60 | | 22.22 | 22.13 | 22.21 |
| 90 | 1 | 0 | | 22.56 | 22.45 | 22.52 |
| 90 | 1 | 244 | | 21.85 | 21.78 | 21.83 |
| 90 | 240 | 0 | | 21.95 | 21.89 | 21.96 |
| 90 | 1 | 1 | QPSK | 22.35 | 22.33 | 22.52 |
| 90 | 1 | 243 | | 22.13 | 22.19 | 22.26 |
| 90 | 120 | 60 | | 22.03 | 22.12 | 22.21 |
| 90 | 1 | 0 | | 21.95 | 21.88 | 21.82 |
| 90 | 1 | 244 | | 22.02 | 22.15 | 22.26 |
| 90 | 240 | 0 | | 22.11 | 22.16 | 2.25 |
| 90 | 1 | 1 | 16-QAM | 22.13 | 22.22 | 22.33 |
| 90 | 1 | 243 | | 22.06 | 22.12 | 22.25 |
| 90 | 120 | 60 | | 22.01 | 22.08 | 22.15 |
| 90 | 1 | 0 | | 21.55 | 21.63 | 21.71 |
| 90 | 1 | 244 | | 22.06 | 22.11 | 22.15 |
| 90 | 240 | 0 | | 21.21 | 21.23 | 21.31 |
| 90 | 1 | 1 | 64-QAM | 20.53 | 20.65 | 20.74 |
| 90 | 1 | 243 | | 19.82 | 19.72 | 19.79 |
| 90 | 120 | 60 | | 20.77 | 20.86 | 20.83 |
| 90 | 1 | 0 | | 20.31 | 20.33 | 20.41 |
| 90 | 1 | 244 | | 20.26 | 20.19 | 20.29 |
| 90 | 240 | 0 | | 20.71 | 20.82 | 20.98 |
| 90 | 1 | 1 | 256-QAM | 18.72 | 18.85 | 18.93 |
| 90 | 1 | 243 | | 18.26 | 18.33 | 18.41 |
| 90 | 120 | 60 | | 18.63 | 18.59 | 18.65 |
| 90 | 1 | 0 | | 18.95 | 19.03 | 19.12 |
| 90 | 1 | 244 | | 18.33 | 18.44 | 18.53 |
| 90 | 240 | 0 | | 18.52 | 18.44 | 18.56 |



| NR n41 Maximum Average Power [dBm] | | | | | | |
|------------------------------------|---------|-----------|-----------|--------|--------|---------|
| BW [MHz] | RB Size | RB Offset | Mod | Lowest | Middle | Highest |
| 100 | 1 | 1 | PI/2 BPSK | 22.29 | 22.44 | 22.36 |
| 100 | 1 | 271 | | 22.21 | 22.14 | 22.03 |
| 100 | 135 | 67 | | 22.11 | 22.03 | 22.06 |
| 100 | 1 | 0 | | 22.33 | 22.21 | 22.12 |
| 100 | 1 | 272 | | 22.35 | 22.28 | 22.26 |
| 100 | 270 | 0 | | 21.95 | 21.89 | 21.96 |
| 100 | 1 | 1 | QPSK | 22.25 | 22.33 | 22.15 |
| 100 | 1 | 271 | | 22.26 | 22.15 | 22.23 |
| 100 | 135 | 67 | | 22.32 | 22.29 | 22.21 |
| 100 | 1 | 0 | | 22.40 | 22.31 | 22.36 |
| 100 | 1 | 272 | | 22.19 | 22.33 | 22.23 |
| 100 | 270 | 0 | | 22.12 | 22.09 | 22.02 |
| 100 | 1 | 1 | 16-QAM | 21.85 | 21.92 | 21.95 |
| 100 | 1 | 271 | | 22.13 | 22.36 | 22.22 |
| 100 | 135 | 67 | | 22.31 | 22.34 | 22.21 |
| 100 | 1 | 0 | | 21.55 | 21.36 | 21.32 |
| 100 | 1 | 272 | | 21.56 | 21.41 | 21.36 |
| 100 | 270 | 0 | | 21.16 | 21.13 | 21.06 |
| 100 | 1 | 1 | 64-QAM | 21.23 | 20.22 | 20.16 |
| 100 | 1 | 271 | | 20.13 | 20.06 | 20.01 |
| 100 | 135 | 67 | | 20.63 | 20.56 | 20.65 |
| 100 | 1 | 0 | | 20.56 | 20.41 | 20.32 |
| 100 | 1 | 272 | | 20.22 | 20.15 | 20.06 |
| 100 | 270 | 0 | | 20.63 | 20.59 | 20.65 |
| 100 | 1 | 1 | 256-QAM | 18.63 | 18.65 | 18.59 |
| 100 | 1 | 271 | | 18.56 | 18.66 | 18.56 |
| 100 | 135 | 67 | | 18.33 | 18.21 | 18.12 |
| 100 | 1 | 0 | | 18.62 | 18.52 | 18.63 |
| 100 | 1 | 272 | | 18.52 | 18.59 | 18.56 |
| 100 | 270 | 0 | | 18.85 | 18.86 | 18.79 |



ERP/EIRP

Modulation DFT-s OFDM

| NR n41 / 20MHz (Average) (GT - LC = -3.0 dB) | | | | | | | |
|--|-----------|------|--------|-------------|---------------|-----------|---------|
| Channel | Mode | RB | | Conducted | | EIRP | |
| | | Size | Offset | Power (dBm) | Power (Watts) | EIRP(dBm) | EIRP(W) |
| Lowest | PI/2 BPSK | 1 | 49 | 22.32 | 0.1707 | 19.32 | 0.0856 |
| Middle | | 1 | 49 | 22.52 | 0.1787 | 19.52 | 0.0896 |
| Highest | | 1 | 49 | 22.65 | 0.1841 | 19.65 | 0.0923 |
| Lowest | QPSK | 1 | 0 | 22.65 | 0.1841 | 19.65 | 0.0923 |
| Middle | | 1 | 0 | 22.74 | 0.1880 | 19.74 | 0.0942 |
| Highest | | 1 | 0 | 22.87 | 0.1937 | 19.87 | 0.0971 |
| Lowest | 16QAM | 1 | 1 | 20.63 | 0.1157 | 17.63 | 0.0580 |
| Middle | | 1 | 1 | 20.52 | 0.1128 | 17.52 | 0.0565 |
| Highest | | 1 | 1 | 20.36 | 0.1087 | 17.36 | 0.0545 |
| Lowest | 64QAM | 50 | 0 | 21.66 | 0.1466 | 18.66 | 0.0735 |
| Middle | | 50 | 0 | 21.75 | 0.1497 | 18.75 | 0.0750 |
| Highest | | 50 | 0 | 21.63 | 0.1456 | 18.63 | 0.0730 |
| Lowest | 256QAM | 50 | 0 | 19.33 | 0.0858 | 16.33 | 0.0430 |
| Middle | | 50 | 0 | 19.41 | 0.0873 | 16.41 | 0.0438 |
| Highest | | 50 | 0 | 19.55 | 0.0902 | 16.55 | 0.0452 |
| Limit | EIRP < 2W | | | Result | | PASS | |

| NR n41 / 40MHz (Average) (GT - LC = -3.0 dB) | | | | | | | |
|--|-----------|------|--------|-------------|---------------|-----------|---------|
| Channel | Mode | RB | | Conducted | | EIRP | |
| | | Size | Offset | Power (dBm) | Power (Watts) | EIRP(dBm) | EIRP(W) |
| Lowest | PI/2 BPSK | 1 | 0 | 22.66 | 0.1846 | 19.66 | 0.0925 |
| Middle | | 1 | 0 | 22.78 | 0.1897 | 19.78 | 0.0951 |
| Highest | | 1 | 0 | 22.85 | 0.1928 | 19.85 | 0.0967 |
| Lowest | QPSK | 1 | 1 | 22.76 | 0.1888 | 19.76 | 0.0947 |
| Middle | | 1 | 1 | 22.73 | 0.1875 | 19.73 | 0.0940 |
| Highest | | 1 | 1 | 22.52 | 0.1787 | 19.52 | 0.0896 |
| Lowest | 16QAM | 1 | 1 | 20.33 | 0.1079 | 17.33 | 0.0541 |
| Middle | | 1 | 1 | 20.41 | 0.1100 | 17.41 | 0.0551 |
| Highest | | 1 | 1 | 20.36 | 0.1087 | 17.36 | 0.0545 |
| Lowest | 64QAM | 100 | 0 | 21.23 | 0.1328 | 18.23 | 0.0666 |
| Middle | | 100 | 0 | 21.32 | 0.1356 | 18.32 | 0.0680 |
| Highest | | 100 | 0 | 21.41 | 0.1384 | 18.41 | 0.0694 |
| Lowest | 256QAM | 100 | 0 | 19.36 | 0.0863 | 16.36 | 0.0433 |
| Middle | | 100 | 0 | 19.42 | 0.0875 | 16.42 | 0.0439 |
| Highest | | 100 | 0 | 19.52 | 0.0896 | 16.52 | 0.0449 |
| Limit | EIRP < 2W | | | Result | | PASS | |



| NR n41 / 50MHz (Average) (GT - LC = -3.0 dB) | | | | | | | |
|--|-----------|------|--------|-------------|---------------|-----------|---------|
| Channel | Mode | RB | | Conducted | | EIRP | |
| | | Size | Offset | Power (dBm) | Power (Watts) | EIRP(dBm) | EIRP(W) |
| Lowest | PI/2 BPSK | 1 | 1 | 22.52 | 0.1787 | 19.52 | 0.0896 |
| Middle | | 1 | 1 | 22.47 | 0.1767 | 19.47 | 0.0886 |
| Highest | | 1 | 1 | 22.63 | 0.1833 | 19.63 | 0.0919 |
| Lowest | QPSK | 1 | 1 | 22.55 | 0.1799 | 19.55 | 0.0902 |
| Middle | | 1 | 1 | 22.43 | 0.1750 | 19.43 | 0.0878 |
| Highest | | 1 | 1 | 22.52 | 0.1787 | 19.52 | 0.0896 |
| Lowest | 16QAM | 1 | 1 | 22.42 | 0.1746 | 19.42 | 0.0875 |
| Middle | | 1 | 1 | 22.56 | 0.1804 | 19.56 | 0.0904 |
| Highest | | 1 | 1 | 22.43 | 0.1750 | 19.43 | 0.0878 |
| Lowest | 64QAM | 100 | 0 | 21.63 | 0.1456 | 18.63 | 0.0730 |
| Middle | | 100 | 0 | 21.52 | 0.1420 | 18.52 | 0.0712 |
| Highest | | 100 | 0 | 21.73 | 0.1490 | 18.73 | 0.0747 |
| Lowest | 256QAM | 128 | 0 | 18.96 | 0.0788 | 15.96 | 0.0395 |
| Middle | | 128 | 0 | 19.03 | 0.0800 | 16.03 | 0.0401 |
| Highest | | 128 | 0 | 18.75 | 0.0750 | 15.75 | 0.0376 |
| Limit | EIRP < 2W | | | Result | | PASS | |

| NR n41 / 60MHz (Average) (GT - LC = -3.0 dB) | | | | | | | |
|--|-----------|------|--------|-------------|---------------|-----------|---------|
| Channel | Mode | RB | | Conducted | | EIRP | |
| | | Size | Offset | Power (dBm) | Power (Watts) | EIRP(dBm) | EIRP(W) |
| Lowest | PI/2 BPSK | 1 | 1 | 22.36 | 0.1722 | 19.36 | 0.0863 |
| Middle | | 1 | 1 | 22.45 | 0.1758 | 19.45 | 0.0882 |
| Highest | | 1 | 1 | 22.52 | 0.1787 | 19.52 | 0.0896 |
| Lowest | QPSK | 1 | 0 | 22.52 | 0.1787 | 19.52 | 0.0896 |
| Middle | | 1 | 0 | 22.63 | 0.1833 | 19.63 | 0.0919 |
| Highest | | 1 | 0 | 22.41 | 0.1742 | 19.41 | 0.0873 |
| Lowest | 16QAM | 1 | 1 | 22.29 | 0.1695 | 19.29 | 0.0850 |
| Middle | | 1 | 1 | 22.41 | 0.1742 | 19.41 | 0.0873 |
| Highest | | 1 | 1 | 22.25 | 0.1679 | 19.25 | 0.0842 |
| Lowest | 64QAM | 162 | 0 | 20.56 | 0.1138 | 17.56 | 0.0571 |
| Middle | | 162 | 0 | 20.63 | 0.1157 | 17.63 | 0.0580 |
| Highest | | 162 | 0 | 20.76 | 0.1192 | 17.76 | 0.0598 |
| Lowest | 256QAM | 1 | 1 | 19.06 | 0.0806 | 16.06 | 0.0404 |
| Middle | | 1 | 1 | 19.15 | 0.0823 | 16.15 | 0.0413 |
| Highest | | 1 | 1 | 19.23 | 0.0838 | 16.23 | 0.0420 |
| Limit | EIRP < 2W | | | Result | | PASS | |



| NR n41 / 80MHz (Average) (GT - LC = -3.0 dB) | | | | | | | |
|--|-----------|------|--------|-------------|---------------|-----------|---------|
| Channel | Mode | RB | | Conducted | | EIRP | |
| | | Size | Offset | Power (dBm) | Power (Watts) | EIRP(dBm) | EIRP(W) |
| Lowest | PI/2 BPSK | 1 | 1 | 22.56 | 0.1804 | 19.56 | 0.0904 |
| Middle | | 1 | 1 | 22.63 | 0.1833 | 19.63 | 0.0919 |
| Highest | | 1 | 1 | 22.46 | 0.1762 | 19.46 | 0.0884 |
| Lowest | QPSK | 1 | 0 | 22.23 | 0.1672 | 19.23 | 0.0838 |
| Middle | | 1 | 0 | 22.31 | 0.1703 | 19.31 | 0.0854 |
| Highest | | 1 | 0 | 22.46 | 0.1762 | 19.46 | 0.0884 |
| Lowest | 16QAM | 1 | 1 | 22.32 | 0.1707 | 19.32 | 0.0856 |
| Middle | | 1 | 1 | 22.41 | 0.1742 | 19.41 | 0.0873 |
| Highest | | 1 | 1 | 22.52 | 0.1787 | 19.52 | 0.0896 |
| Lowest | 64QAM | 135 | 67 | 18.33 | 0.0681 | 15.33 | 0.0342 |
| Middle | | 135 | 67 | 18.21 | 0.0663 | 15.21 | 0.0332 |
| Highest | | 135 | 67 | 18.12 | 0.0649 | 15.12 | 0.0326 |
| Lowest | 256QAM | 108 | 54 | 18.86 | 0.0770 | 15.86 | 0.0386 |
| Middle | | 108 | 54 | 18.63 | 0.0730 | 15.63 | 0.0366 |
| Highest | | 108 | 54 | 18.96 | 0.0788 | 15.96 | 0.0395 |
| Limit | EIRP < 2W | | | Result | | PASS | |

| NR n41 / 90MHz (Average) (GT - LC = -3.0 dB) | | | | | | | |
|--|-----------|------|--------|-------------|---------------|-----------|---------|
| Channel | Mode | RB | | Conducted | | EIRP | |
| | | Size | Offset | Power (dBm) | Power (Watts) | EIRP(dBm) | EIRP(W) |
| Lowest | PI/2 BPSK | 1 | 0 | 22.56 | 0.1804 | 19.56 | 0.0904 |
| Middle | | 1 | 0 | 22.45 | 0.1758 | 19.45 | 0.0882 |
| Highest | | 1 | 0 | 22.52 | 0.1787 | 19.52 | 0.0896 |
| Lowest | QPSK | 1 | 1 | 22.35 | 0.1718 | 19.35 | 0.0861 |
| Middle | | 1 | 1 | 22.33 | 0.1711 | 19.33 | 0.0858 |
| Highest | | 1 | 1 | 22.52 | 0.1787 | 19.52 | 0.0896 |
| Lowest | 16QAM | 1 | 1 | 22.13 | 0.1634 | 19.13 | 0.0819 |
| Middle | | 1 | 1 | 22.22 | 0.1668 | 19.22 | 0.0836 |
| Highest | | 1 | 1 | 22.33 | 0.1711 | 19.33 | 0.0858 |
| Lowest | 64QAM | 240 | 0 | 20.71 | 0.1178 | 17.71 | 0.0591 |
| Middle | | 240 | 0 | 20.82 | 0.1208 | 17.82 | 0.0606 |
| Highest | | 240 | 0 | 20.98 | 0.1254 | 17.98 | 0.0629 |
| Lowest | 256QAM | 1 | 0 | 18.95 | 0.0786 | 15.95 | 0.0394 |
| Middle | | 1 | 0 | 19.03 | 0.0800 | 16.03 | 0.0401 |
| Highest | | 1 | 0 | 19.12 | 0.0817 | 16.12 | 0.0410 |
| Limit | EIRP < 2W | | | Result | | PASS | |




| NR n41 / 100MHz (Average) (GT - LC = -3.0 dB) | | | | | | | |
|---|-----------|------|--------|-------------|---------------|-----------|---------|
| Channel | Mode | RB | | Conducted | | EIRP | |
| | | Size | Offset | Power (dBm) | Power (Watts) | EIRP(dBm) | EIRP(W) |
| Lowest | PI/2 BPSK | 1 | 1 | 22.29 | 0.1695 | 19.29 | 0.0850 |
| Middle | | 1 | 1 | 22.44 | 0.1754 | 19.44 | 0.0880 |
| Highest | | 1 | 1 | 22.36 | 0.1722 | 19.36 | 0.0863 |
| Lowest | QPSK | 1 | 0 | 22.40 | 0.1738 | 19.40 | 0.0871 |
| Middle | | 1 | 0 | 22.31 | 0.1703 | 19.31 | 0.0854 |
| Highest | | 1 | 0 | 22.36 | 0.1722 | 19.36 | 0.0863 |
| Lowest | 16QAM | 1 | 271 | 22.13 | 0.1634 | 19.13 | 0.0819 |
| Middle | | 1 | 271 | 22.36 | 0.1722 | 19.36 | 0.0863 |
| Highest | | 1 | 271 | 22.22 | 0.1668 | 19.22 | 0.0836 |
| Lowest | 64QAM | 1 | 1 | 21.23 | 0.1328 | 18.23 | 0.0666 |
| Middle | | 1 | 1 | 20.22 | 0.1052 | 17.22 | 0.0528 |
| Highest | | 1 | 1 | 20.16 | 0.1038 | 17.16 | 0.0520 |
| Lowest | 256QAM | 216 | 0 | 20.63 | 0.1157 | 17.63 | 0.0580 |
| Middle | | 216 | 0 | 20.55 | 0.1136 | 17.55 | 0.0569 |
| Highest | | 216 | 0 | 20.41 | 0.1100 | 17.41 | 0.0551 |
| Limit | EIRP < 2W | | | Result | | PASS | |



5G NR n41

Peak-to-Average Ratio

| Mode | n41 / 100MHz | | | | |
|------------|--------------|---------|------|---------|-------------|
| Mod. | BPSK | | QPSK | | Limit: 13dB |
| RB Size | 1RB | Full RB | 1RB | Full RB | Result |
| Lowest CH | 4.21 | 5.73 | 5.31 | 5.73 | PASS |
| Middle CH | 4.66 | 5.75 | 5.09 | 5.43 | |
| Highest CH | 4.50 | 5.66 | 4.73 | 5.70 | |

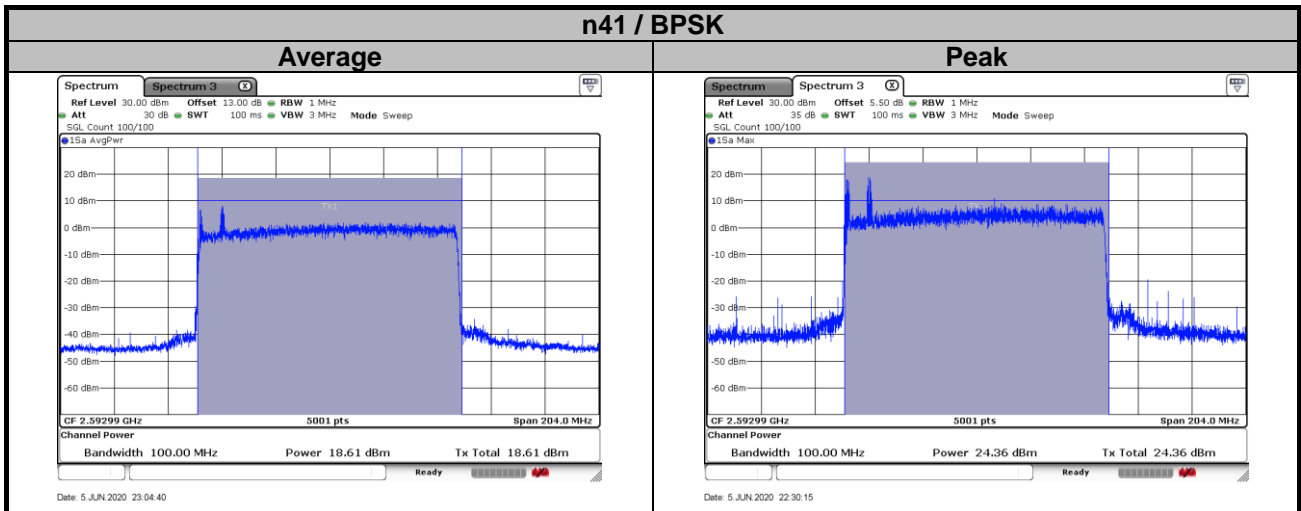

Note:

1. The PAR Maximum test value is calculated from Peak Power subtract Average Power.
2. The worst case is reported.




26dB Bandwidth

| Mode | n41 : 26dB BW(MHz) | | | | | | | | | | | |
|------------|--------------------|---------|--------|---------|---------|---------|-------|---------|-------|---------|-------|---------|
| BW | 20MHz | | 40MHz | | 50MHz | | 60MHz | | 80MHz | | 90MHz | |
| Mod. | QPSK | 16QAM | QPSK | 16QAM | QPSK | 16QAM | QPSK | 16QAM | QPSK | 16QAM | QPSK | 16QAM |
| Lowest CH | 20.02 | 20.06 | 37.96 | 38.12 | 48.15 | 48.05 | 61.74 | 62.58 | 82.00 | 81.68 | 90.27 | 90.09 |
| Middle CH | 20.30 | 19.78 | 38.04 | 38.44 | 48.35 | 47.75 | 62.34 | 62.70 | 81.36 | 80.56 | 89.55 | 90.99 |
| Highest CH | 20.06 | 20.10 | 39.00 | 38.04 | 48.15 | 48.05 | 62.46 | 63.06 | 81.20 | 82.16 | 89.19 | 90.99 |
| Mode | n41 : 26dB BW(MHz) | | | | | | | | | | | |
| BW | 20MHz | | 40MHz | | 50MHz | | 60MHz | | 80MHz | | 90MHz | |
| Mod. | 64QAM | 256 QAM | 64QAM | 256 QAM | 64QAM | 256 QAM | 64QAM | 256 QAM | 64QAM | 256 QAM | 64QAM | 256 QAM |
| Lowest CH | 20.18 | 20.38 | 37.962 | 38.12 | 48.65 | 48.05 | 61.38 | 62.46 | 81.52 | 82.00 | 90.63 | 90.63 |
| Middle CH | 20.22 | 20.42 | 38.202 | 38.362 | 48.05 | 48.25 | 61.38 | 62.70 | 80.72 | 81.52 | 90.45 | 91.17 |
| Highest CH | 20.14 | 19.86 | 37.962 | 37.962 | 47.95 | 48.05 | 62.10 | 62.7 | 81.04 | 82.52 | 90.99 | 89.55 |
| Mode | n41 : 26dB BW(MHz) | | | | | | | | | | | |
| BW | 20MHz | | 40MHz | | 50MHz | | 60MHz | | 80MHz | | 90MHz | |
| Mod. | BPSK | | BPSK | | BPSK | | BPSK | | BPSK | | BPSK | |
| Lowest CH | 19.90 | | 38.20 | | 48.35 | | 62.58 | | 81.04 | | 90.81 | |
| Middle CH | 20.42 | | 38.04 | | 47.65 | | 62.82 | | 82.00 | | 90.81 | |
| Highest CH | 20.22 | | 38.36 | | 48.05 | | 62.82 | | 81.20 | | 90.45 | |
| Mode | n41 : 26dB BW(MHz) | | | | | | | | | | | |
| BW | 100MHz | | | | | | | | | | | |
| Mod. | BPSK | QPSK | 16QAM | 64QAM | 256 QAM | | | | | | | |
| Lowest CH | 101.1 | 100.7 | 101.3 | 101.3 | 101.3 | | | | | | | |
| Middle CH | 101.7 | 101.3 | 101.3 | 101.7 | 101.1 | | | | | | | |
| Highest CH | 100.9 | 102.1 | 100.9 | 101.3 | 101.3 | | | | | | | |




n41 20MHz

Lowest Channel / BPSK

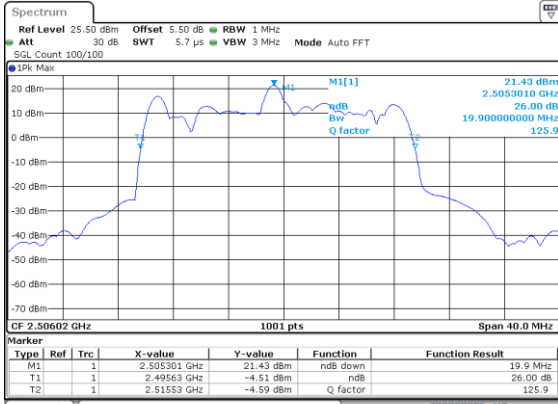


Date: 28 MAY 2020 22:41:38

Lowest Channel / QPSK

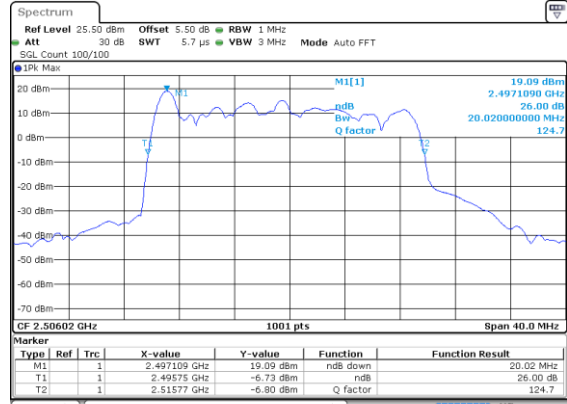


Date: 28 MAY 2020 22:48:59

Middle Channel / BPSK

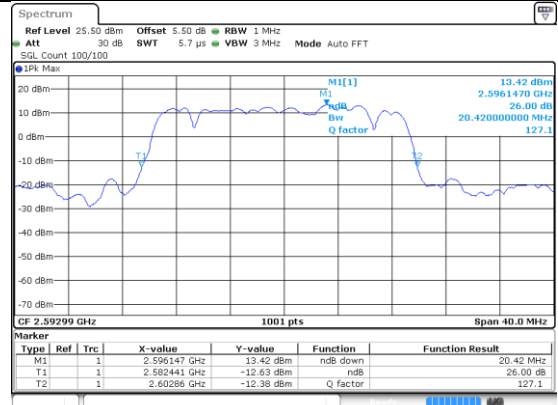


Date: 28 MAY 2020 23:35:07

Middle Channel / QPSK

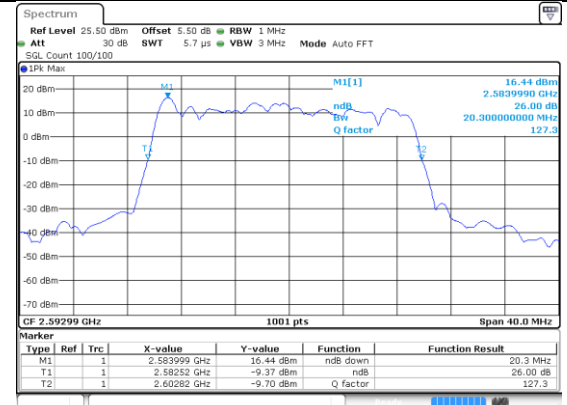


Date: 28 MAY 2020 23:35:47

Highest Channel / BPSK

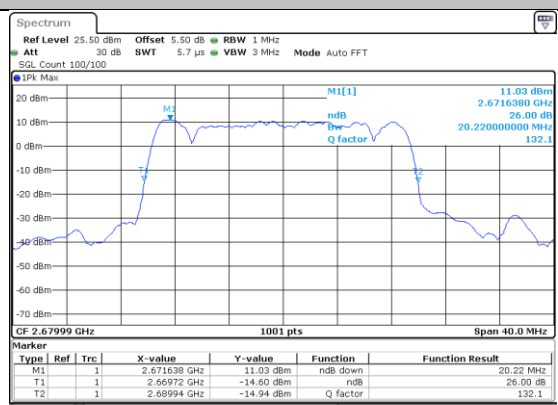

Date: 28 MAY 2020 23:39:39

Highest Channel / QPSK

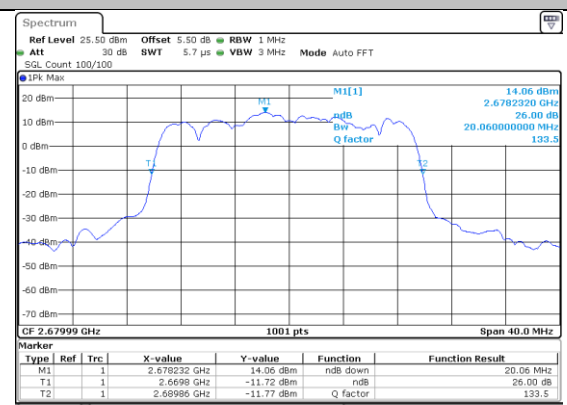


Date: 28 MAY 2020 23:40:29




n41 20MHz

Lowest Channel / 16QAM

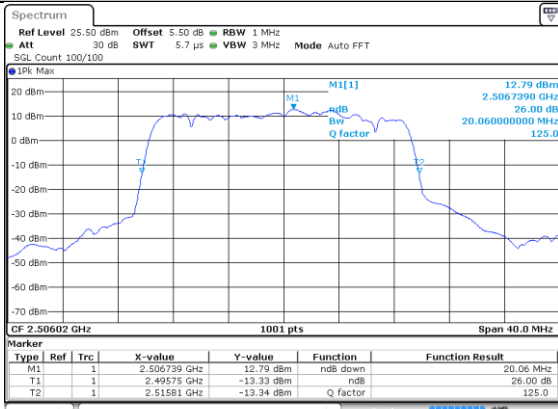


Date: 28 MAY 2020 22:51:28

Lowest Channel / 64QAM

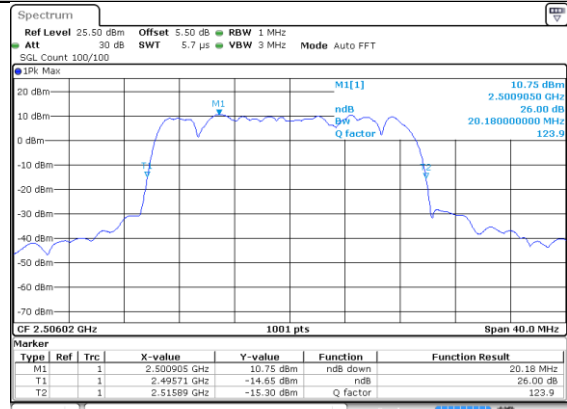


Date: 28 MAY 2020 22:52:02

Middle Channel / 16QAM

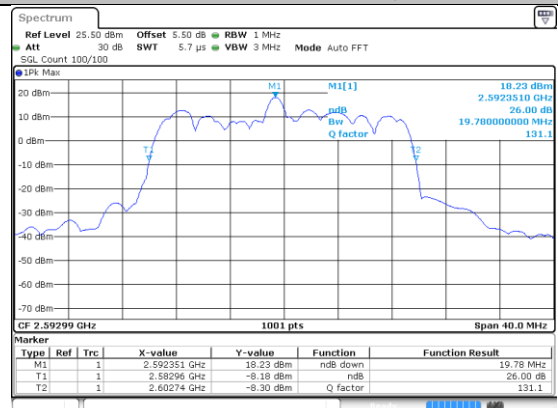


Date: 28 MAY 2020 23:36:18

Middle Channel / 64QAM

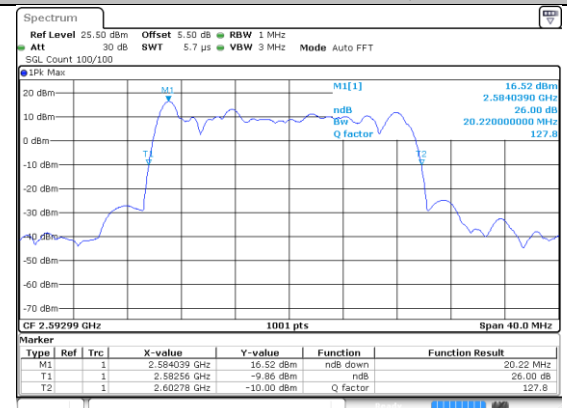


Date: 28 MAY 2020 23:36:37

Highest Channel / 16QAM

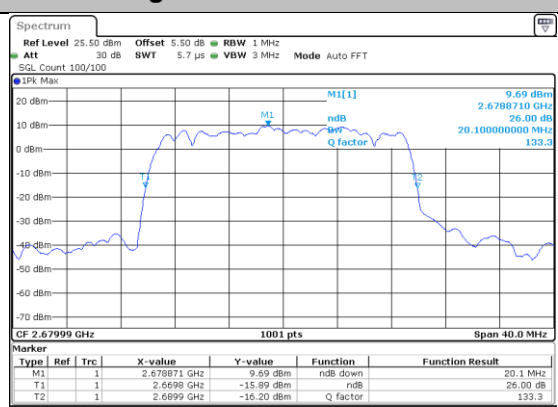

Date: 28 MAY 2020 23:40:47

Highest Channel / 64QAM

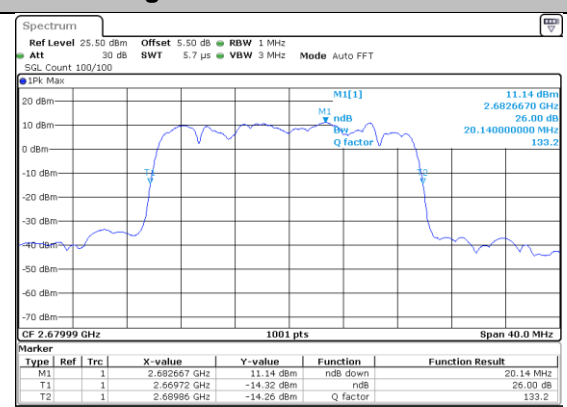


Date: 28 MAY 2020 23:41:12




n41 20MHz


Lowest Channel / 256QAM

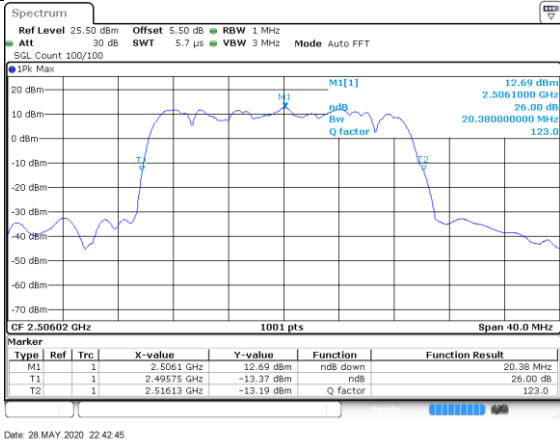

Middle Channel / 256QAM

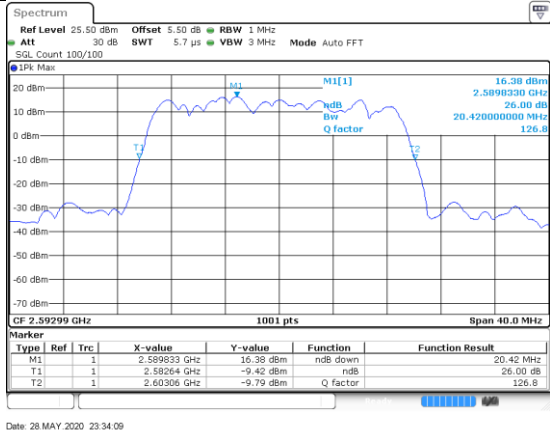


Highest Channel / 256QAM

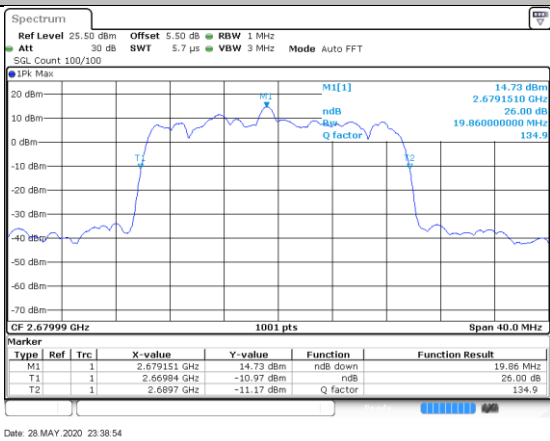




n41 40MHz

Lowest Channel / BPSK

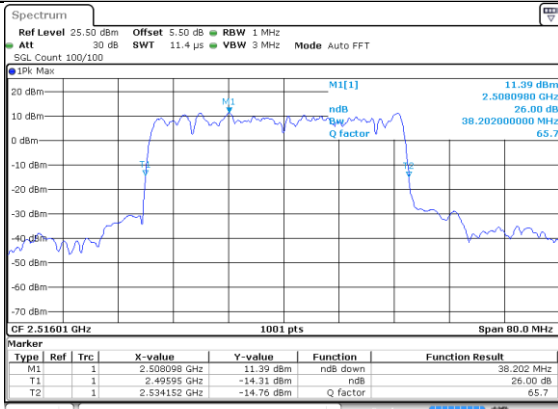


Date: 28 MAY 2020 23:56:57

Lowest Channel / QPSK

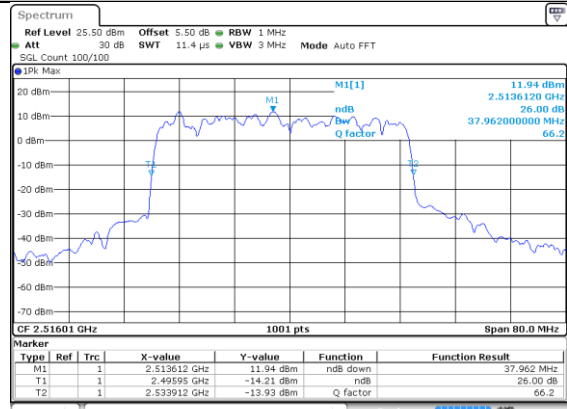


Date: 28 MAY 2020 23:57:39

Middle Channel / BPSK

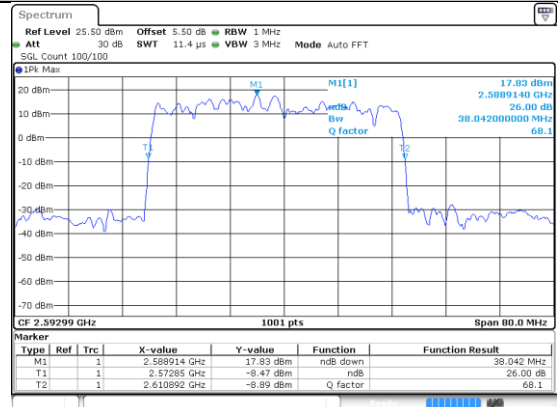


Date: 29 MAY 2020 00:23:27

Middle Channel / QPSK

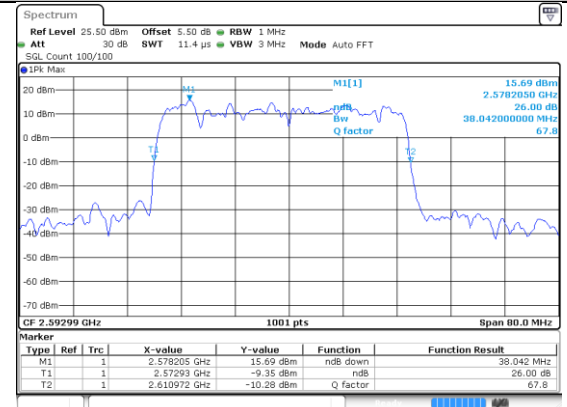


Date: 29 MAY 2020 00:25:24

Highest Channel / BPSK

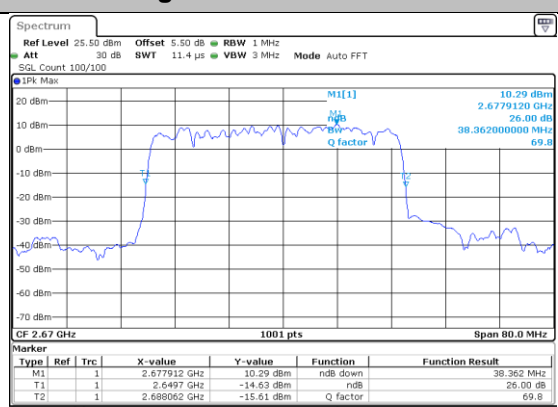

Date: 29 MAY 2020 00:28:52

Highest Channel / QPSK

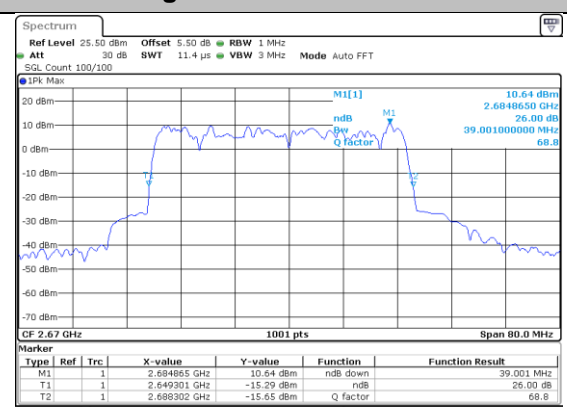


Date: 29 MAY 2020 00:29:35




n41 40MHz

Lowest Channel / 16QAM

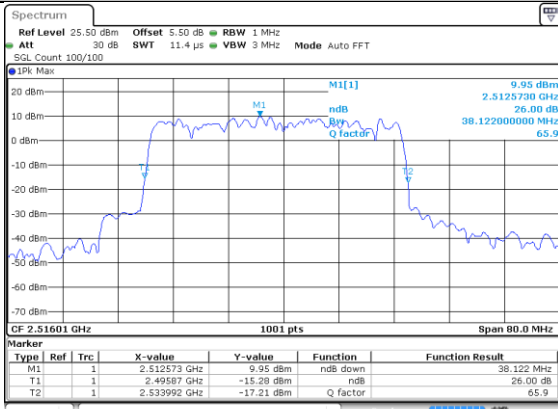


Date: 28 MAY 2020 23:58:06

Lowest Channel / 64QAM

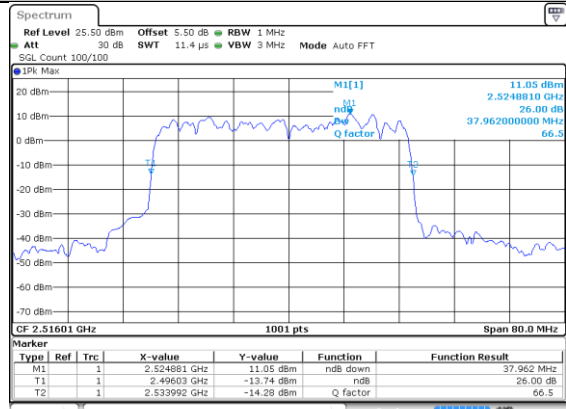


Date: 28 MAY 2020 23:58:32

Middle Channel / 16QAM

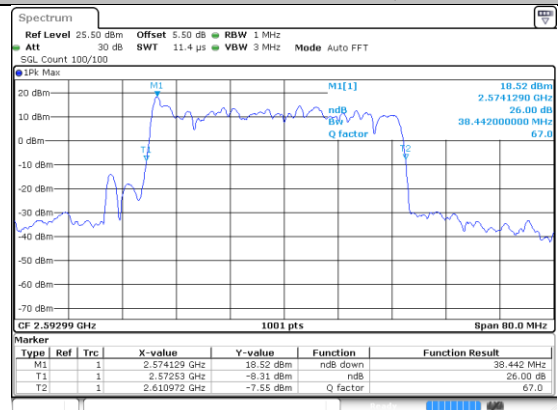


Date: 29 MAY 2020 00:25:50

Middle Channel / 64QAM

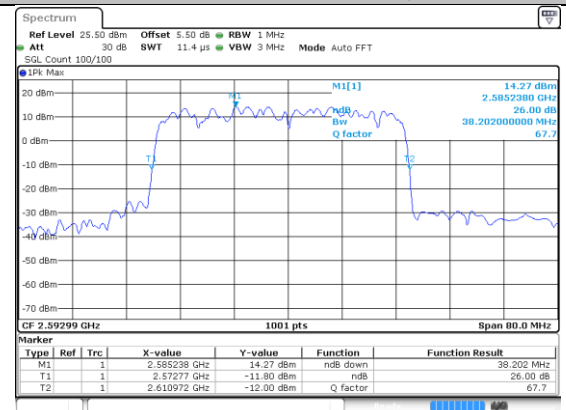


Date: 29 MAY 2020 00:26:18

Highest Channel / 16QAM

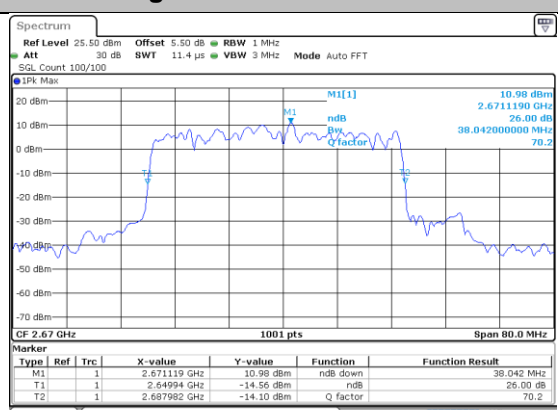

Date: 29 MAY 2020 00:29:57

Highest Channel / 64QAM

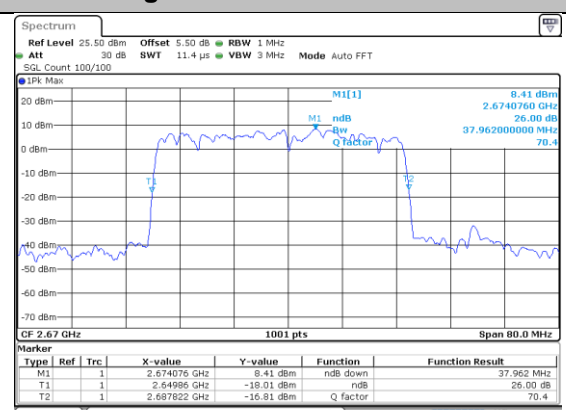


Date: 29 MAY 2020 00:30:25




n41 40MHz


Lowest Channel / 256QAM

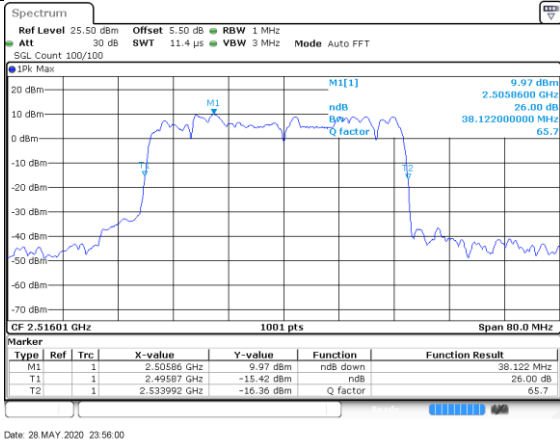

Middle Channel / 256QAM

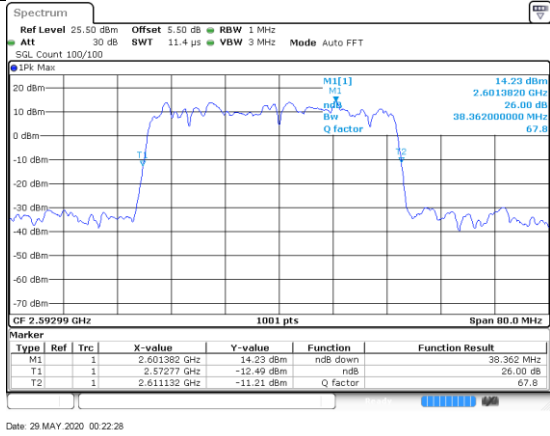


Highest Channel / 256QAM

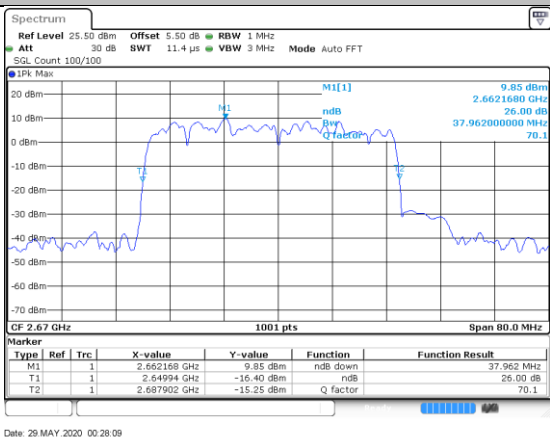




n41 50MHz

Lowest Channel / BPSK

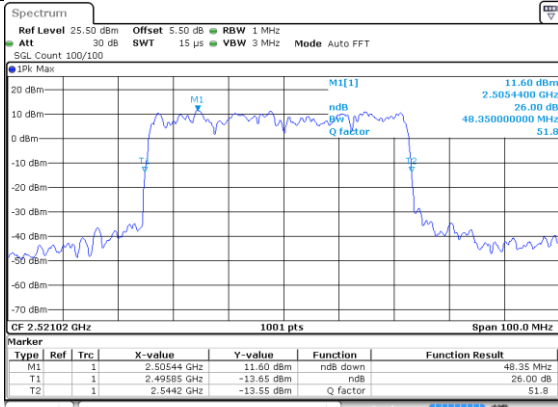


Date: 29 MAY 2020 05:18:45

Lowest Channel / QPSK

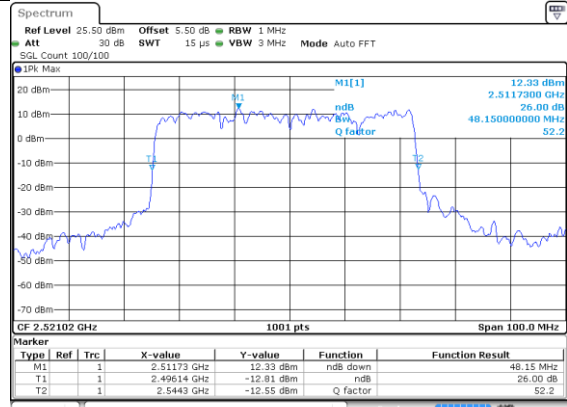


Date: 29 MAY 2020 05:19:49

Middle Channel / BPSK

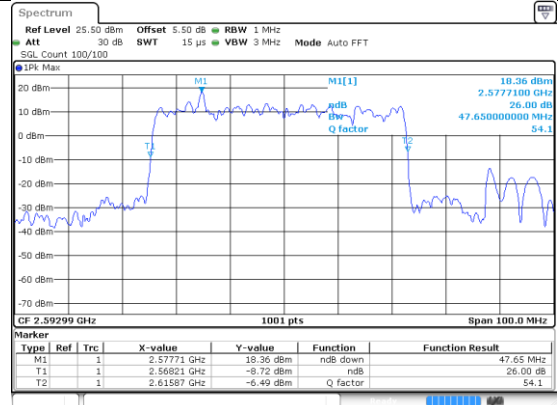


Date: 29 MAY 2020 05:45:24

Middle Channel / QPSK

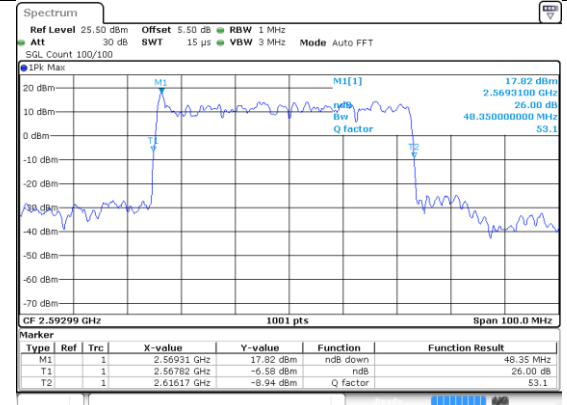


Date: 29 MAY 2020 05:46:16

Highest Channel / BPSK

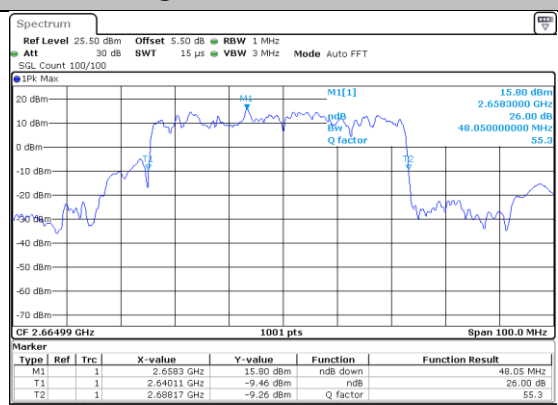

Date: 29 MAY 2020 05:49:44

Highest Channel / QPSK

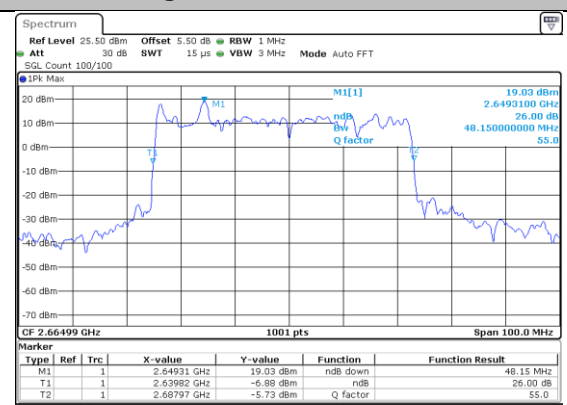


Date: 29 MAY 2020 05:50:25




n41 50MHz

Lowest Channel / 16QAM

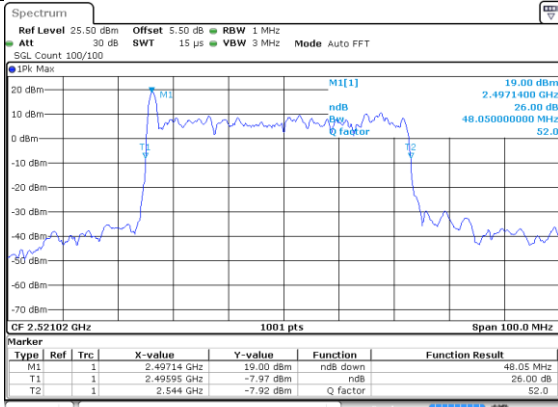


Date: 29 MAY 2020 05:20:17

Lowest Channel / 64QAM

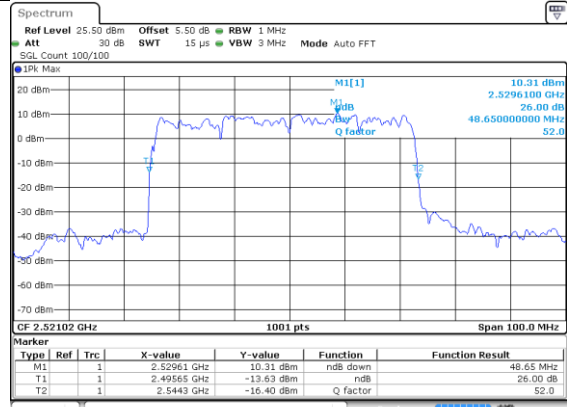


Date: 29 MAY 2020 05:21:03

Middle Channel / 16QAM

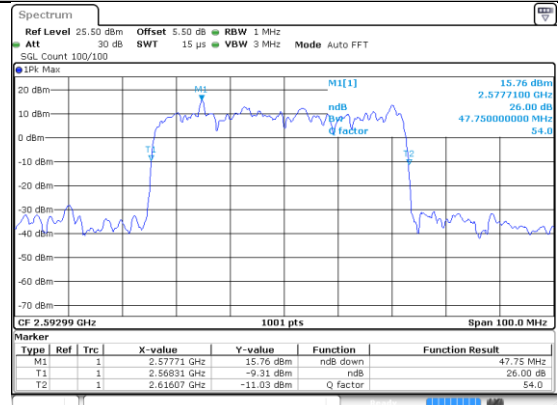


Date: 29 MAY 2020 05:46:40

Middle Channel / 64QAM

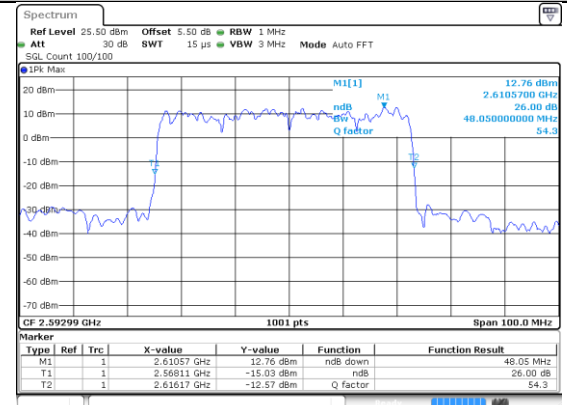


Date: 29 MAY 2020 05:46:58

Highest Channel / 16QAM

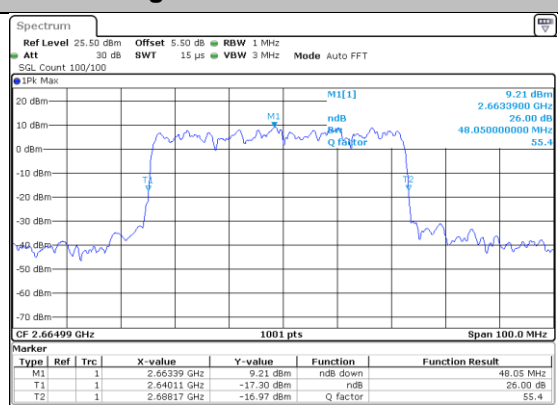

Date: 29 MAY 2020 05:50:48

Highest Channel / 64QAM

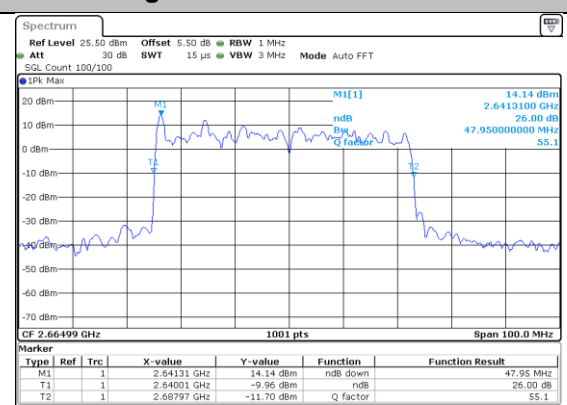


Date: 29 MAY 2020 05:51:18




n41 50MHz


Lowest Channel / 256QAM

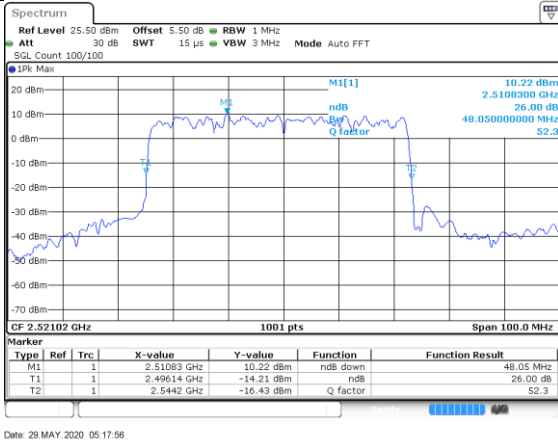

Middle Channel / 256QAM

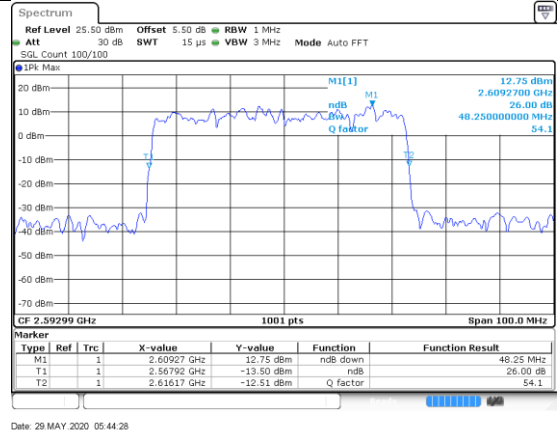


Highest Channel / 256QAM

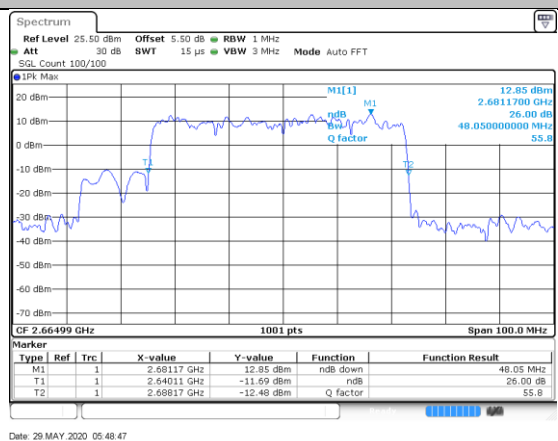




n41 60MHz

Lowest Channel / BPSK

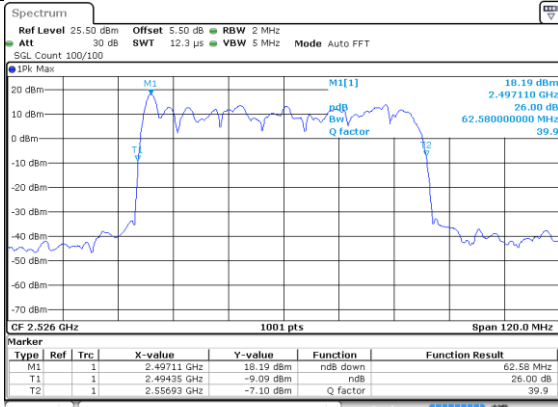


Date: 29 MAY 2020 01:34:43

Lowest Channel / QPSK

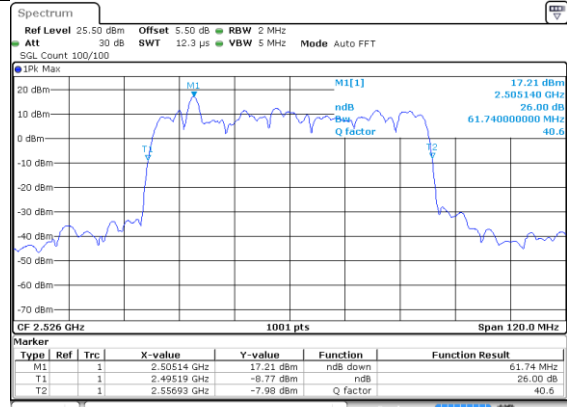


Date: 29 MAY 2020 01:35:39

Middle Channel / BPSK

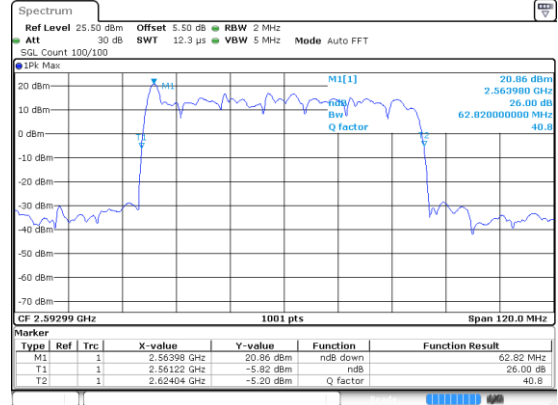


Date: 29 MAY 2020 02:42:42

Middle Channel / QPSK

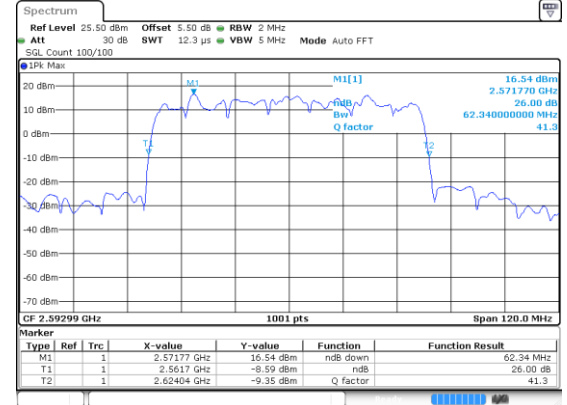


Date: 29 MAY 2020 02:43:28

Highest Channel / BPSK

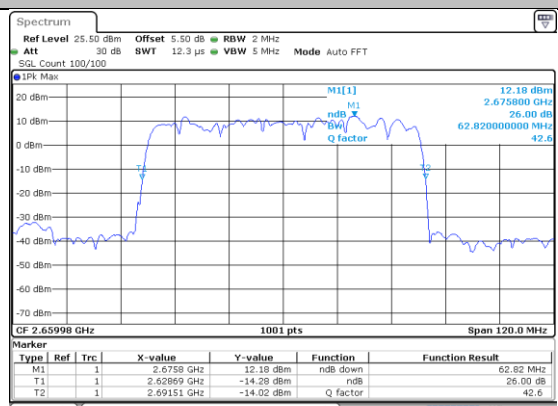

Date: 29 MAY 2020 02:04:11

Highest Channel / QPSK

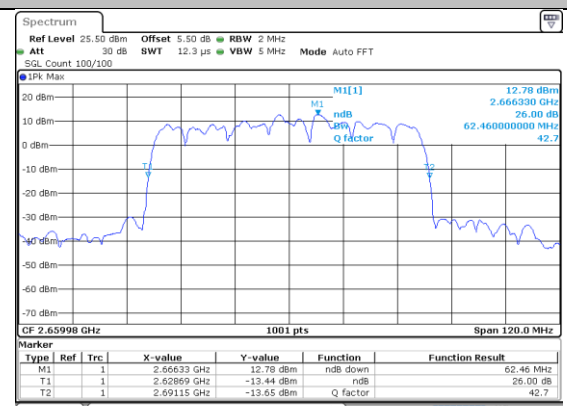


Date: 29 MAY 2020 02:05:02



n41 60MHz


Lowest Channel / 16QAM

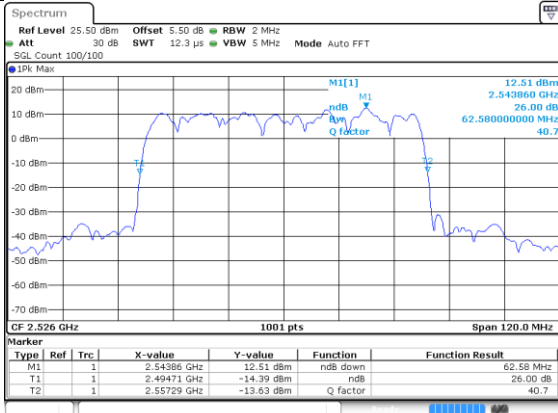

Lowest Channel / 64QAM




Middle Channel / 16QAM

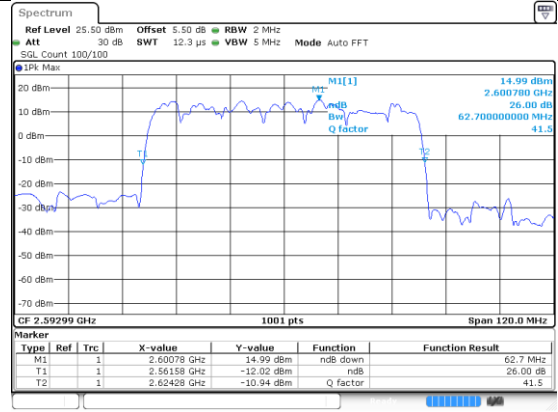


Middle Channel / 64QAM



Highest Channel / 16QAM

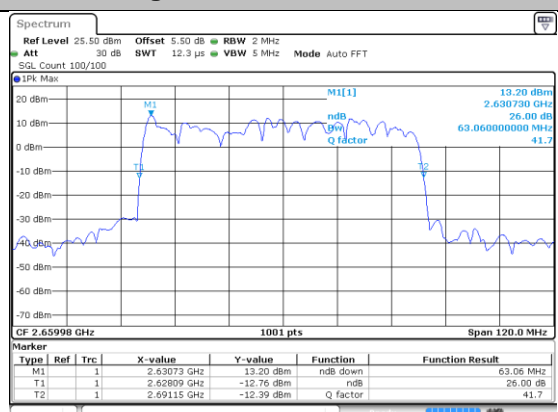


Highest Channel / 64QAM

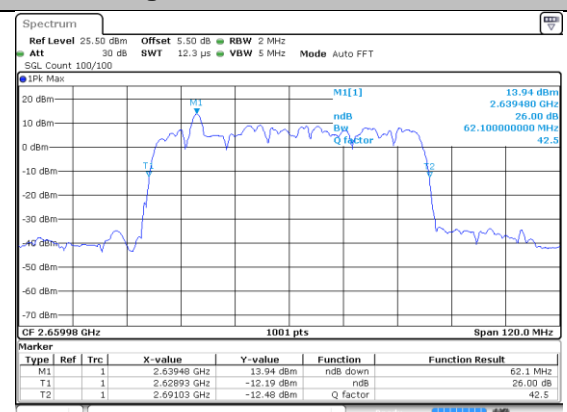




n41 60MHz


Lowest Channel / 256QAM

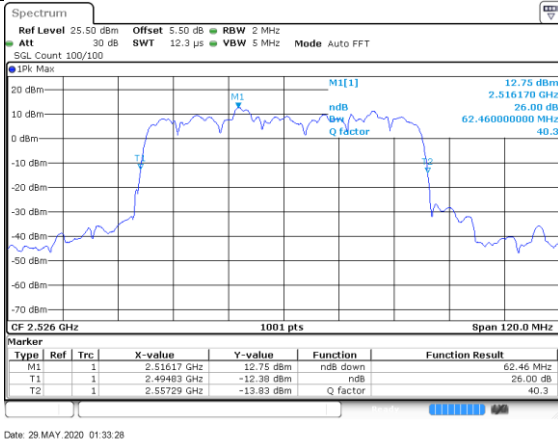

Middle Channel / 256QAM

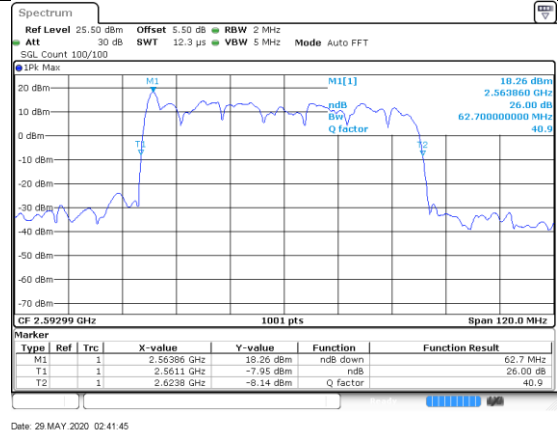


Highest Channel / 256QAM

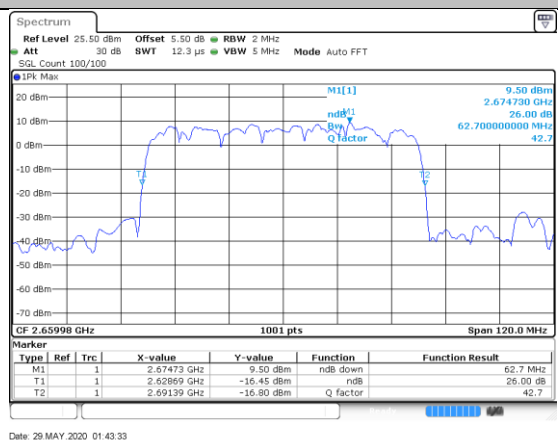




n41 80MHz

Lowest Channel / BPSK

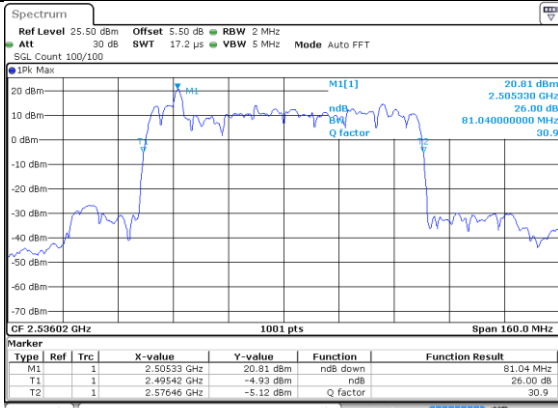


Date: 30 MAY 2020 00:19:21

Lowest Channel / QPSK

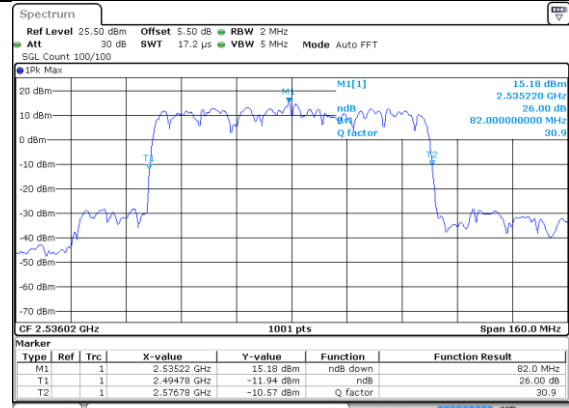


Date: 30 MAY 2020 00:21:57

Middle Channel / BPSK

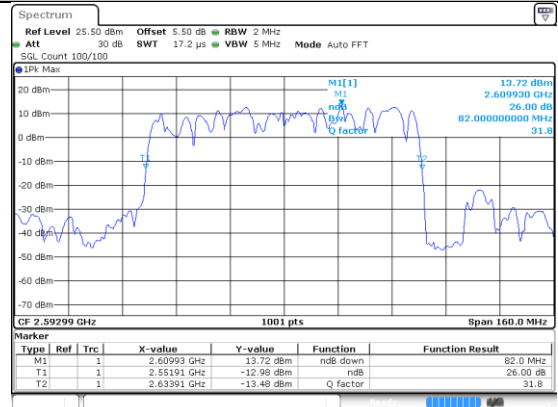


Date: 30 MAY 2020 00:53:04

Middle Channel / QPSK

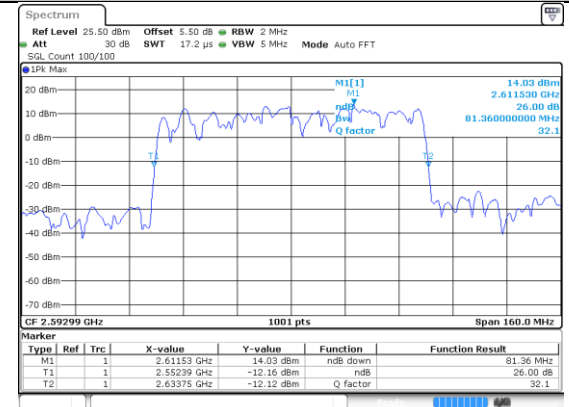


Date: 30 MAY 2020 01:27:01

Highest Channel / BPSK

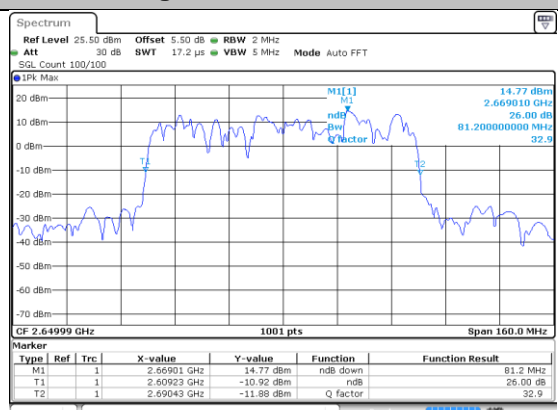

Date: 30 MAY 2020 02:20:55

Highest Channel / QPSK

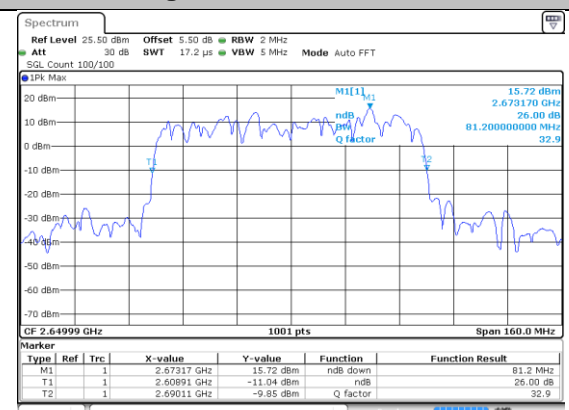


Date: 30 MAY 2020 02:22:02




n41 80MHz


Lowest Channel / 16QAM

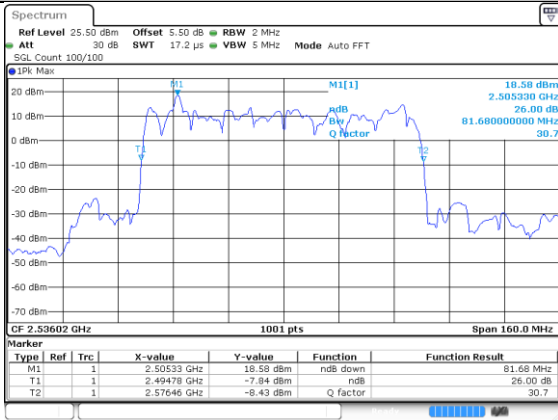


Lowest Channel / 64QAM

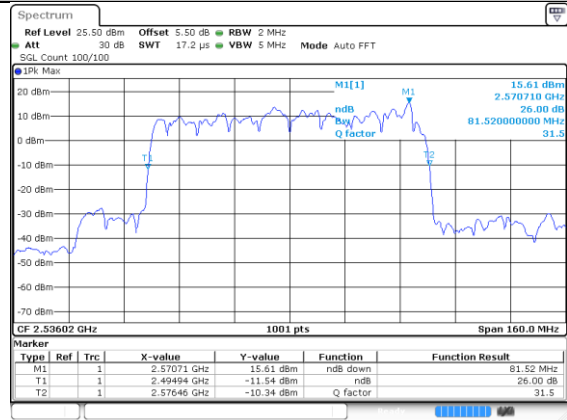


Middle Channel / 16QAM

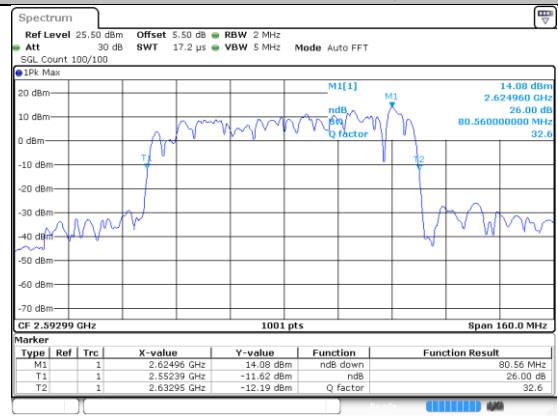


Middle Channel / 64QAM

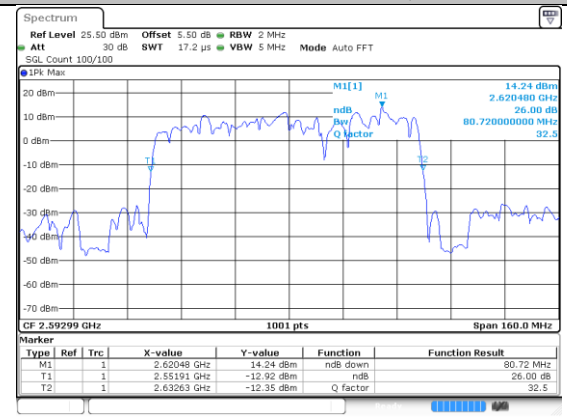

Highest Channel / 16QAM

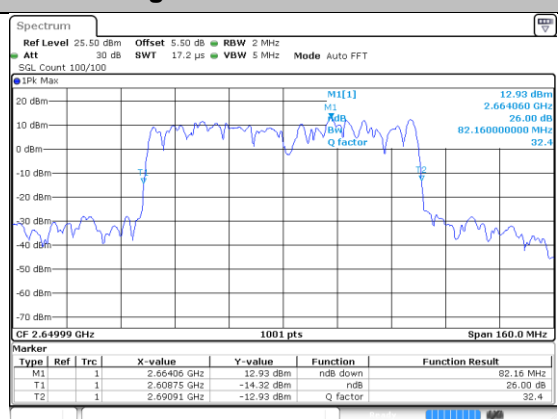


Highest Channel / 64QAM

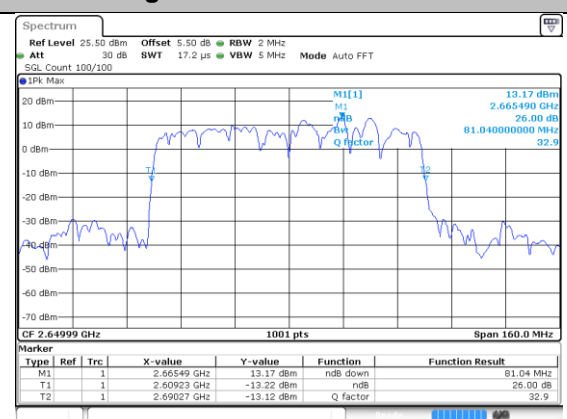




n41 80MHz


Lowest Channel / 256QAM

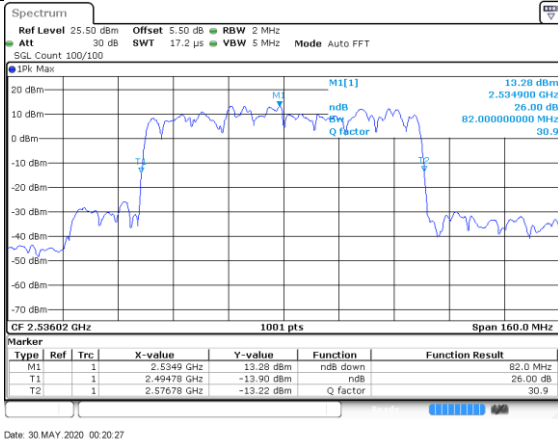

Middle Channel / 256QAM

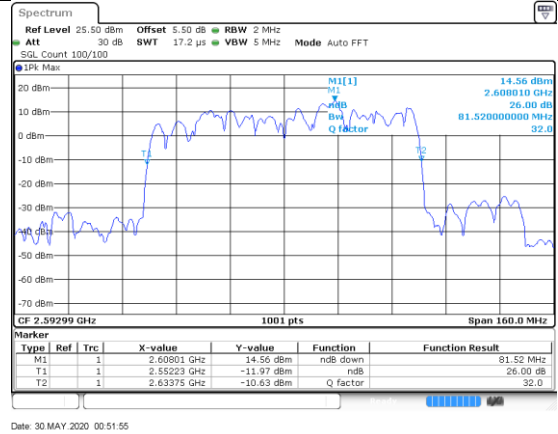


Highest Channel / 256QAM

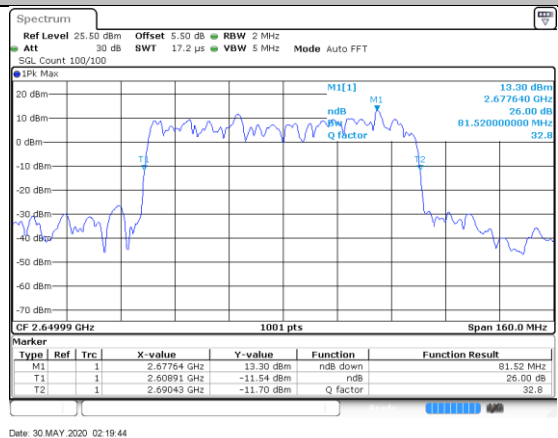




n41 90MHz

Lowest Channel / BPSK

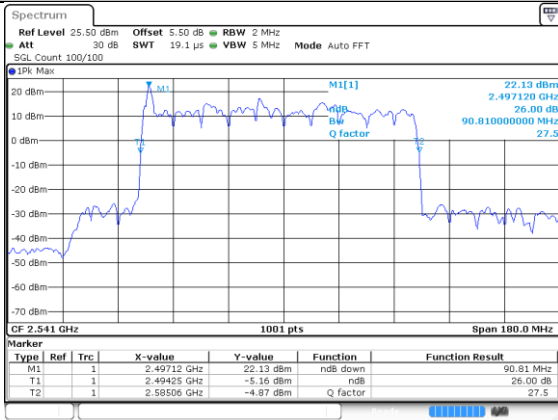


Date: 30 MAY 2020 12:51:28

Lowest Channel / QPSK

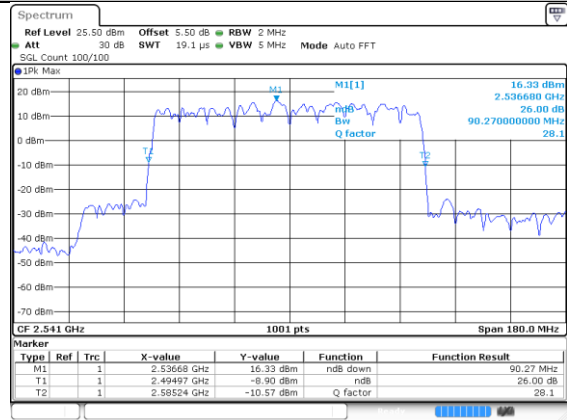


Date: 30 MAY 2020 13:26:59

Middle Channel / BPSK

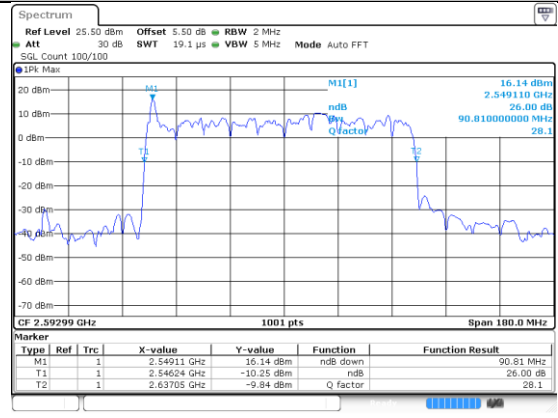


Date: 30 MAY 2020 15:10:19

Middle Channel / QPSK

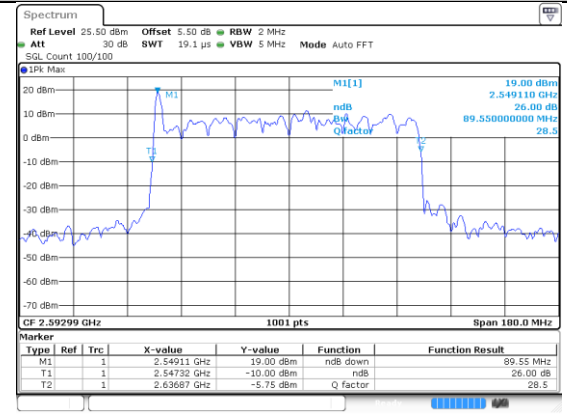


Date: 30 MAY 2020 15:11:43

Highest Channel / BPSK

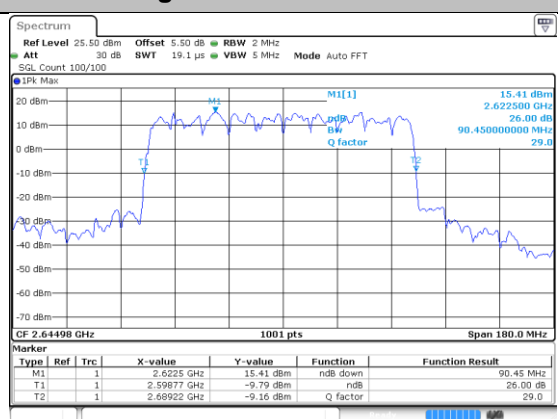

Date: 30 MAY 2020 15:40:29

Highest Channel / QPSK

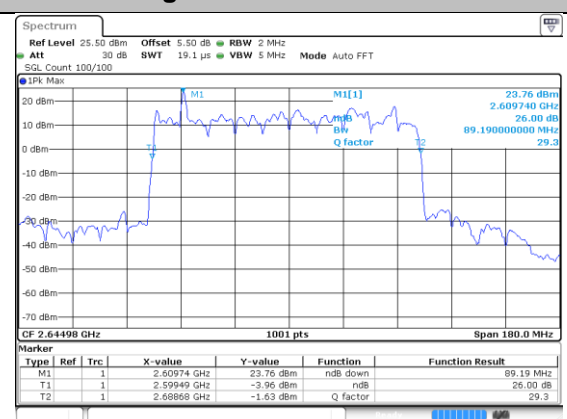


Date: 30 MAY 2020 15:42:27




n41 90MHz


Lowest Channel / 16QAM

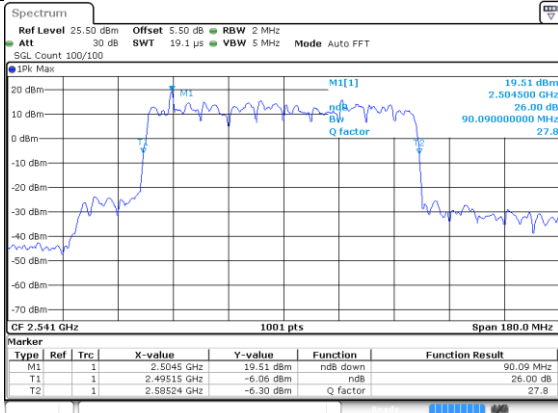

Lowest Channel / 64QAM

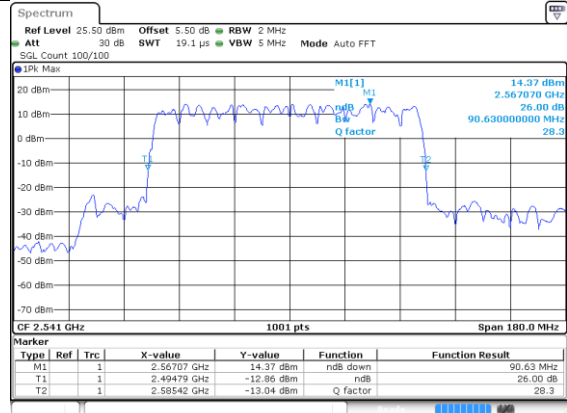


Middle Channel / 16QAM

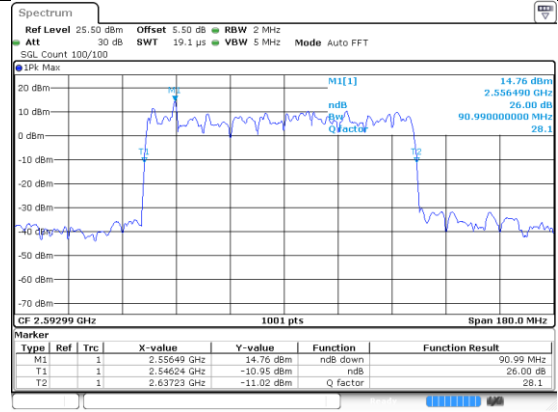


Middle Channel / 64QAM



Highest Channel / 16QAM

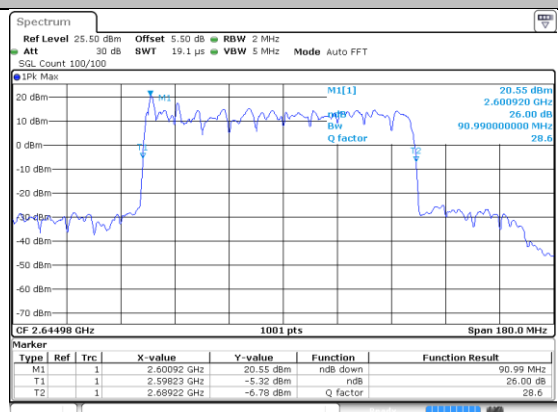


Highest Channel / 64QAM

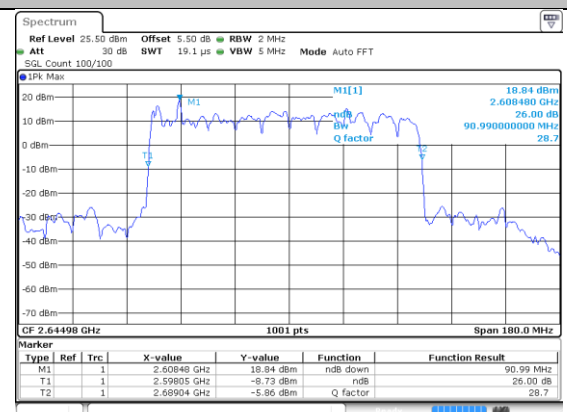




n41 90MHz


Lowest Channel / 256QAM

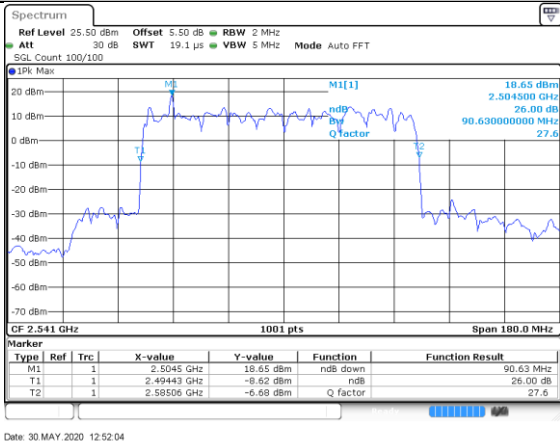

Middle Channel / 256QAM

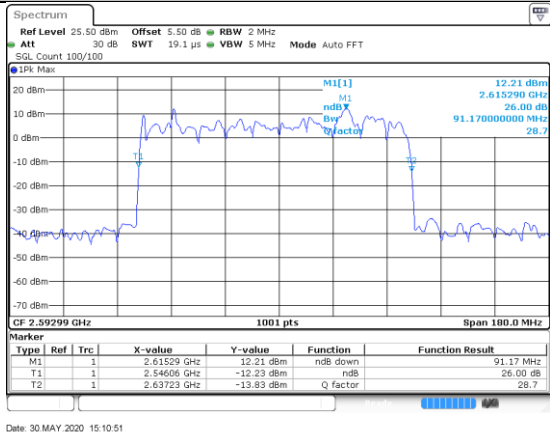


Highest Channel / 256QAM

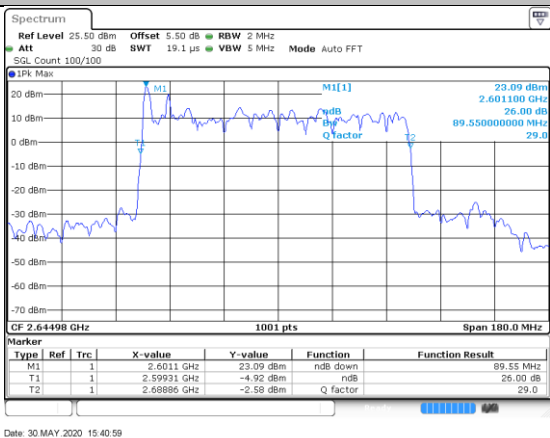




n41 100MHz

Lowest Channel / BPSK

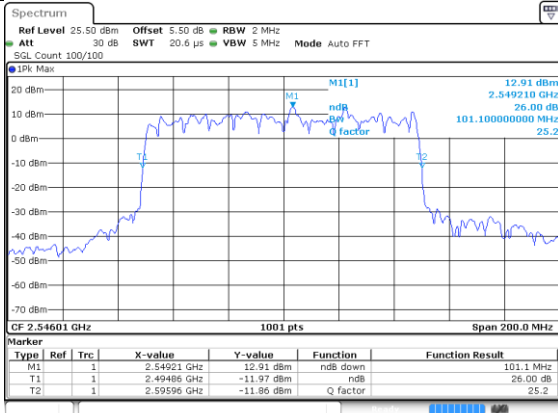


Date: 29 MAY 2020 04:04:03

Lowest Channel / QPSK

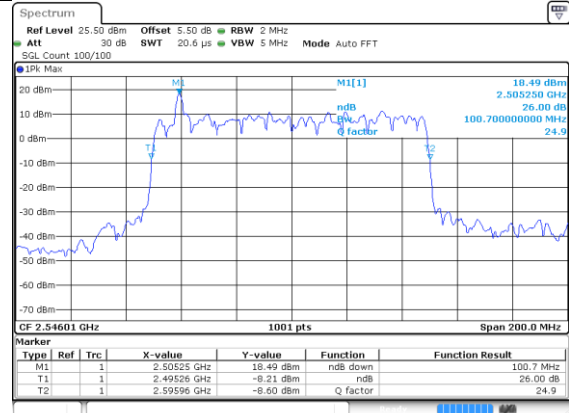


Date: 29 MAY 2020 04:05:05

Middle Channel / BPSK

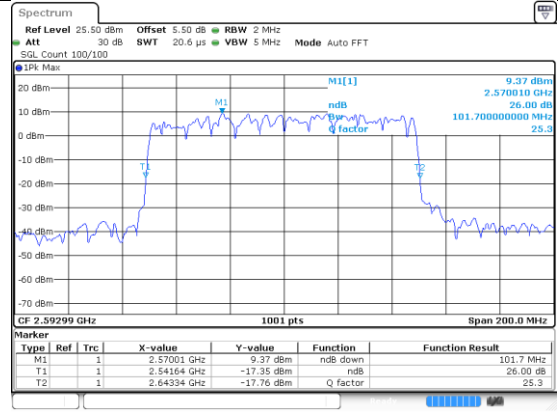


Date: 29 MAY 2020 04:57:01

Middle Channel / QPSK

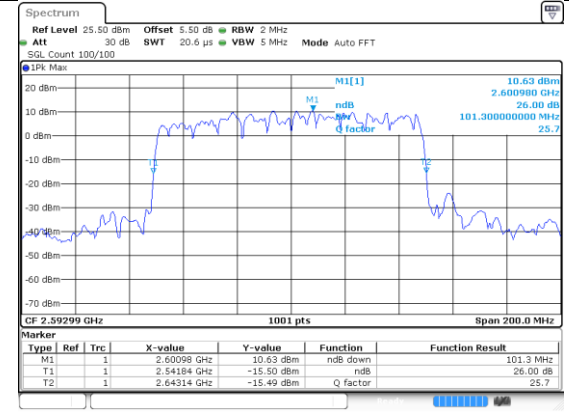


Date: 29 MAY 2020 04:58:08

Highest Channel / BPSK

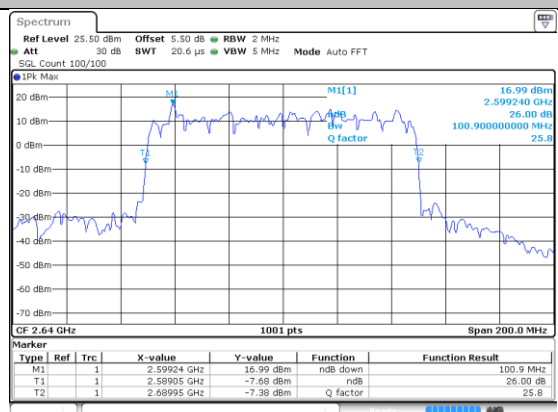

Date: 29 MAY 2020 05:05:17

Highest Channel / QPSK

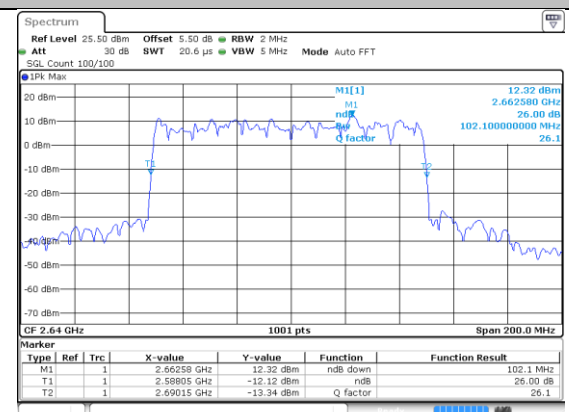


Date: 29 MAY 2020 05:06:33




n41 100MHz

Lowest Channel / 16QAM

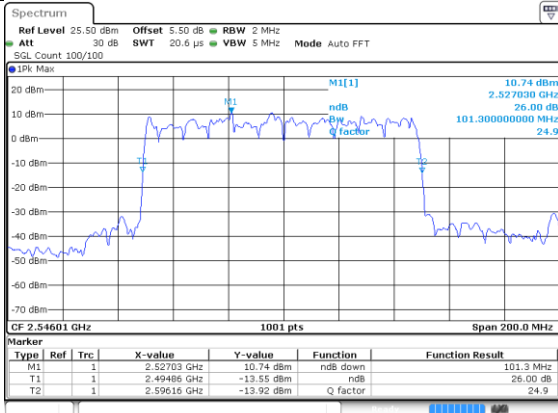


Date: 29 MAY 2020 04:05:49

Lowest Channel / 64QAM

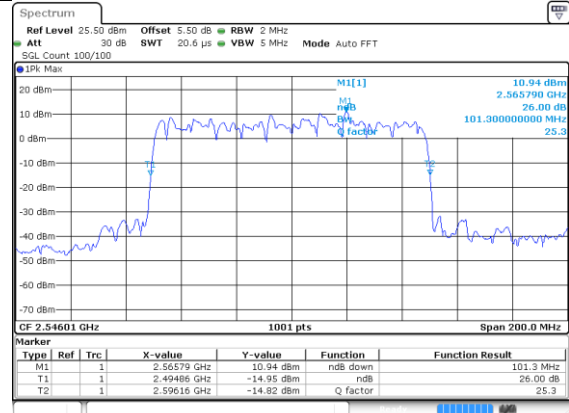


Date: 29 MAY 2020 04:06:28

Middle Channel / 16QAM

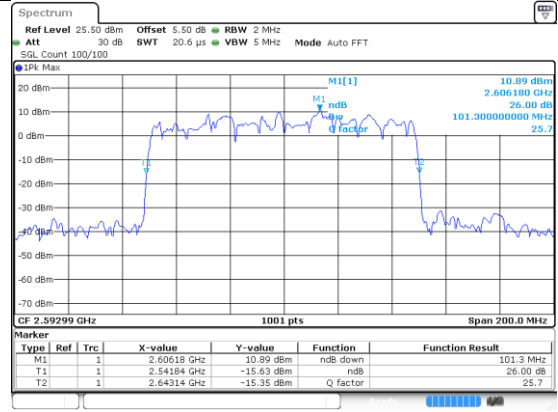


Date: 29 MAY 2020 04:58:59

Middle Channel / 64QAM

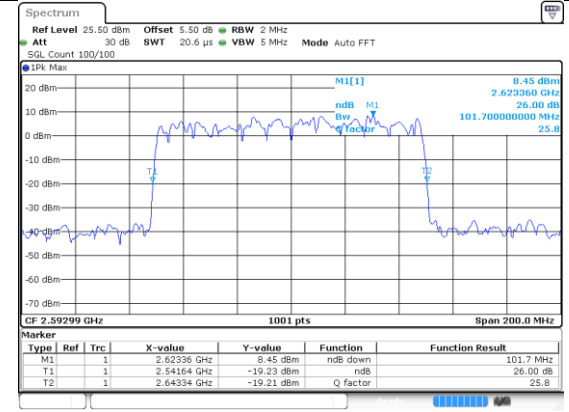


Date: 29 MAY 2020 04:59:41

Highest Channel / 16QAM

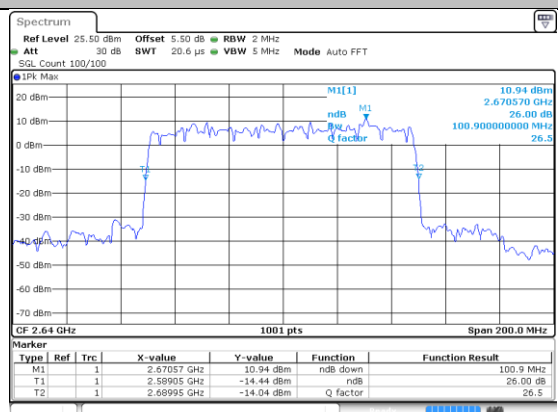

Date: 29 MAY 2020 05:07:55

Highest Channel / 64QAM

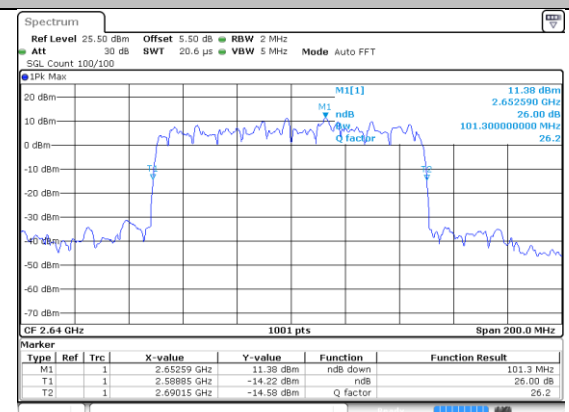


Date: 29 MAY 2020 05:08:59




n41 100MHz


Lowest Channel / 256QAM

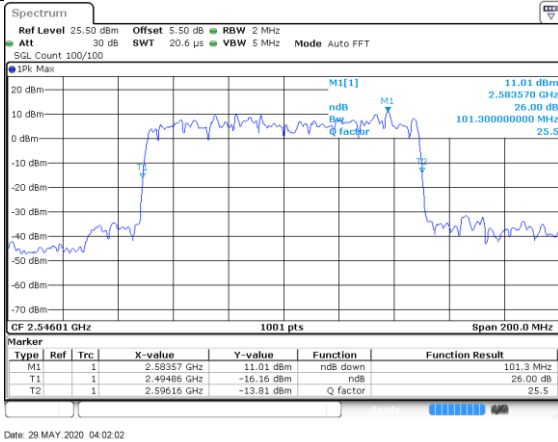

Middle Channel / 256QAM

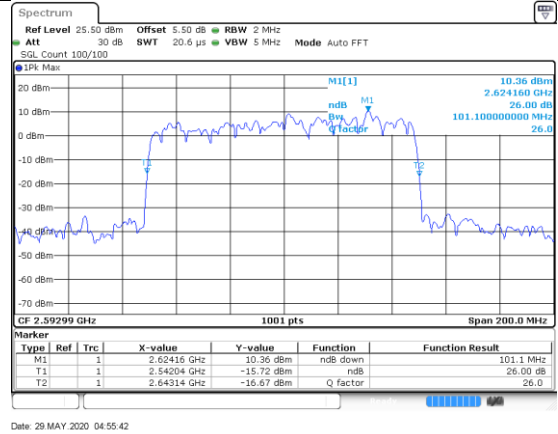

Highest Channel / 256QAM

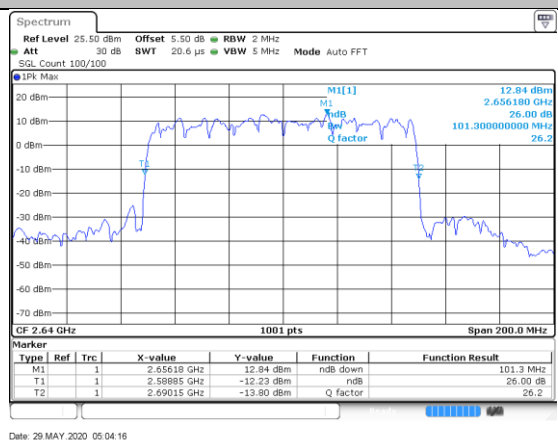



Occupied Bandwidth

| Mode | n41 : OB BW(MHz) | | | | | | | | | | | |
|------------|------------------|--------|-------|--------|--------|--------|-------|--------|-------|--------|-------|--------|
| BW | 20MHz | | 40MHz | | 50MHz | | 60MHz | | 80MHz | | 90MHz | |
| Mod. | QPSK | 16QAM | QPSK | 16QAM | QPSK | 16QAM | QPSK | 16QAM | QPSK | 16QAM | QPSK | 16QAM |
| Lowest CH | 18.50 | 18.50 | 36.04 | 36.20 | 46.55 | 46.15 | 57.90 | 59.82 | 77.68 | 76.40 | 87.75 | 87.57 |
| Middle CH | 18.34 | 18.66 | 36.76 | 35.96 | 46.55 | 45.95 | 58.14 | 58.86 | 76.24 | 77.36 | 87.21 | 86.67 |
| Highest CH | 18.42 | 18.38 | 36.52 | 36.12 | 45.95 | 46.25 | 57.90 | 58.02 | 76.40 | 77.84 | 87.57 | 87.75 |
| Mode | n41 : OB BW(MHz) | | | | | | | | | | | |
| BW | 20MHz | | 40MHz | | 50MHz | | 60MHz | | 80MHz | | 90MHz | |
| Mod. | 64QAM | 256QAM | 64QAM | 256QAM | 64QAM | 256QAM | 64QAM | 256QAM | 64QAM | 256QAM | 64QAM | 256QAM |
| Lowest CH | 18.26 | 18.18 | 35.96 | 35.64 | 45.85 | 46.15 | 59.82 | 57.54 | 75.92 | 77.36 | 85.59 | 85.41 |
| Middle CH | 18.66 | 18.50 | 35.72 | 36.20 | 45.65 | 45.85 | 59.94 | 58.50 | 76.72 | 76.88 | 87.21 | 84.87 |
| Highest CH | 18.54 | 18.46 | 36.76 | 35.88 | 46.15 | 46.45 | 57.90 | 58.86 | 74.16 | 77.36 | 87.21 | 87.57 |
| Mode | n41 : OB BW(MHz) | | | | | | | | | | | |
| BW | 20MHz | | 40MHz | | 50MHz | | 60MHz | | 80MHz | | 90MHz | |
| Mod. | BPSK | | BPSK | | BPSK | | BPSK | | BPSK | | BPSK | |
| Lowest CH | 18.74 | | 36.04 | | 46.45 | | 60.06 | | 77.20 | | 85.41 | |
| Middle CH | 18.46 | | 35.80 | | 45.55 | | 58.26 | | 70.16 | | 87.03 | |
| Highest CH | 18.22 | | 36.28 | | 45.75 | | 58.38 | | 77.20 | | 87.93 | |
| Mode | n41 : OB BW(MHz) | | | | | | | | | | | |
| BW | 100MHz | | | | | | | | | | | |
| Mod. | BPSK | QPSK | 16QAM | 64QAM | 256QAM | | | | | | | |
| Lowest CH | 97.30 | 96.70 | 96.10 | 96.70 | 96.30 | | | | | | | |
| Middle CH | 96.70 | 98.30 | 96.70 | 96.90 | 98.30 | | | | | | | |
| Highest CH | 98.50 | 96.50 | 98.30 | 98.10 | 95.90 | | | | | | | |