



In Collaboration with

s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Glossary:

| | |
|-------|--------------------------------------------|
| TSL | tissue simulating liquid |
| ConvF | sensitivity in TSL / NORM _{x,y,z} |
| N/A | not applicable or not measured |

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices- Part 1: Device used next to the ear (Frequency range of 300MHz to 6GHz)", July 2016
- IEC 62209-2, "Procedure to measure the Specific Absorption Rate (SAR) For wireless communication devices used in close proximity to the human body (frequency range of 30MHz to 6GHz)", March 2010
- KDB865664, SAR Measurement Requirements for 100 MHz to 6 GHz

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor $k=2$, which for a normal distribution Corresponds to a coverage probability of approximately 95%.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttf@chinatl.com http://www.chinatl.cn

Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|------------------------------|--------------------------|--------------|
| DASY Version | DASY52 | 52.10.2.1495 |
| Extrapolation | Advanced Extrapolation | |
| Phantom | Triple Flat Phantom 5.1C | |
| Distance Dipole Center - TSL | 10 mm | with Spacer |
| Zoom Scan Resolution | dx, dy, dz = 5 mm | |
| Frequency | 1900 MHz ± 1 MHz | |

Head TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Head TSL parameters | 22.0 °C | 40.0 | 1.40 mho/m |
| Measured Head TSL parameters | (22.0 ± 0.2) °C | 40.5 ± 6 % | 1.44 mho/m ± 6 % |
| Head TSL temperature change during test | <1.0 °C | --- | --- |

SAR result with Head TSL

| | | |
|---------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 1 cm ³ (1 g) of Head TSL | Condition | |
| SAR measured | 250 mW input power | 9.90 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 39.0 W/kg ± 18.8 % (k=2) |
| SAR averaged over 10 cm ³ (10 g) of Head TSL | Condition | |
| SAR measured | 250 mW input power | 5.12 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 20.3 W/kg ± 18.7 % (k=2) |

Body TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters | 22.0 °C | 53.3 | 1.52 mho/m |
| Measured Body TSL parameters | (22.0 ± 0.2) °C | 54.5 ± 6 % | 1.56 mho/m ± 6 % |
| Body TSL temperature change during test | <1.0 °C | --- | --- |

SAR result with Body TSL

| | | |
|---------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 1 cm ³ (1 g) of Body TSL | Condition | |
| SAR measured | 250 mW input power | 10.1 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | 40.0 W/kg ± 18.8 % (k=2) |
| SAR averaged over 10 cm ³ (10 g) of Body TSL | Condition | |
| SAR measured | 250 mW input power | 5.28 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | 21.0 W/kg ± 18.7 % (k=2) |



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Appendix (Additional assessments outside the scope of CNAS L0570)

Antenna Parameters with Head TSL

| | |
|--------------------------------------|---------------|
| Impedance, transformed to feed point | 51.7Ω+ 6.73jΩ |
| Return Loss | - 23.3dB |

Antenna Parameters with Body TSL

| | |
|--------------------------------------|---------------|
| Impedance, transformed to feed point | 47.8Ω+ 6.72jΩ |
| Return Loss | - 22.8dB |

General Antenna Parameters and Design

| | |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.066 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

| | |
|-----------------|-------|
| Manufactured by | SPEAG |
|-----------------|-------|



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cntl@chinattl.com http://www.chinattl.cn

DASY5 Validation Report for Head TSL

Date: 03.26.2019

Test Laboratory: CTTL, Beijing, China

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d170

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.441$ S/m; $\epsilon_r = 40.48$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3617; ConvF(8.14, 8.14, 8.14) @ 1900 MHz; Calibrated: 1/31/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1331; Calibrated: 2/6/2019
- Phantom: MFP_V5.1C ; Type: QD 000 P51CA; Serial: 1062
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)


System Performance Check/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:
 $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 97.54 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 18.9 W/kg

SAR(1 g) = 9.9 W/kg; SAR(10 g) = 5.12 W/kg


Maximum value of SAR (measured) = 15.6 W/kg

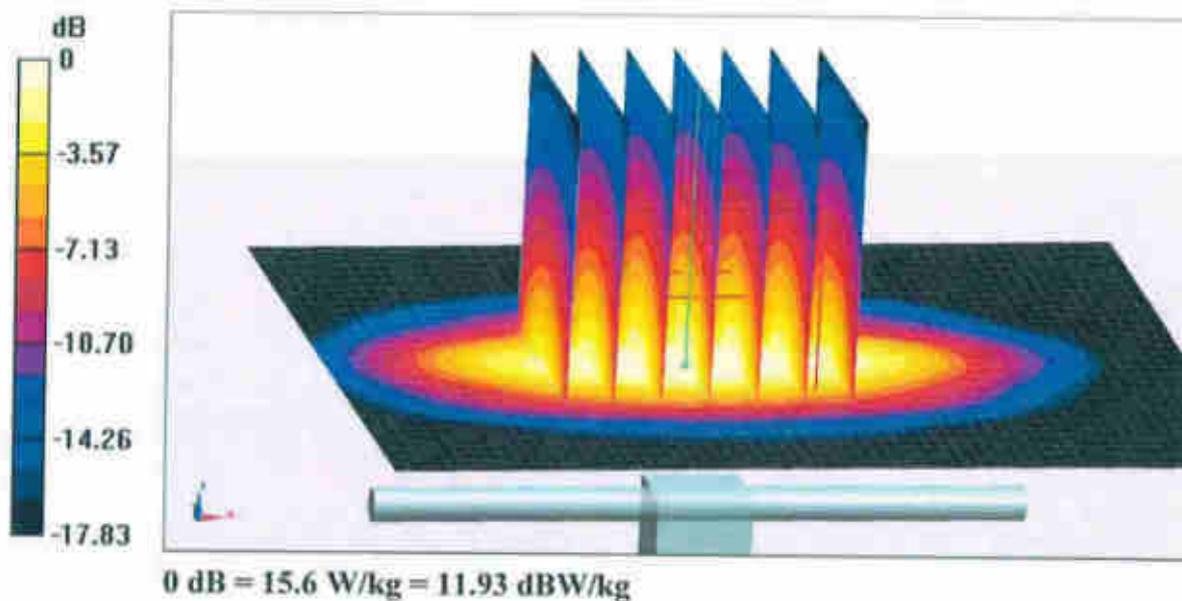



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com <http://www.chinattl.cn>

Impedance Measurement Plot for Head TSL

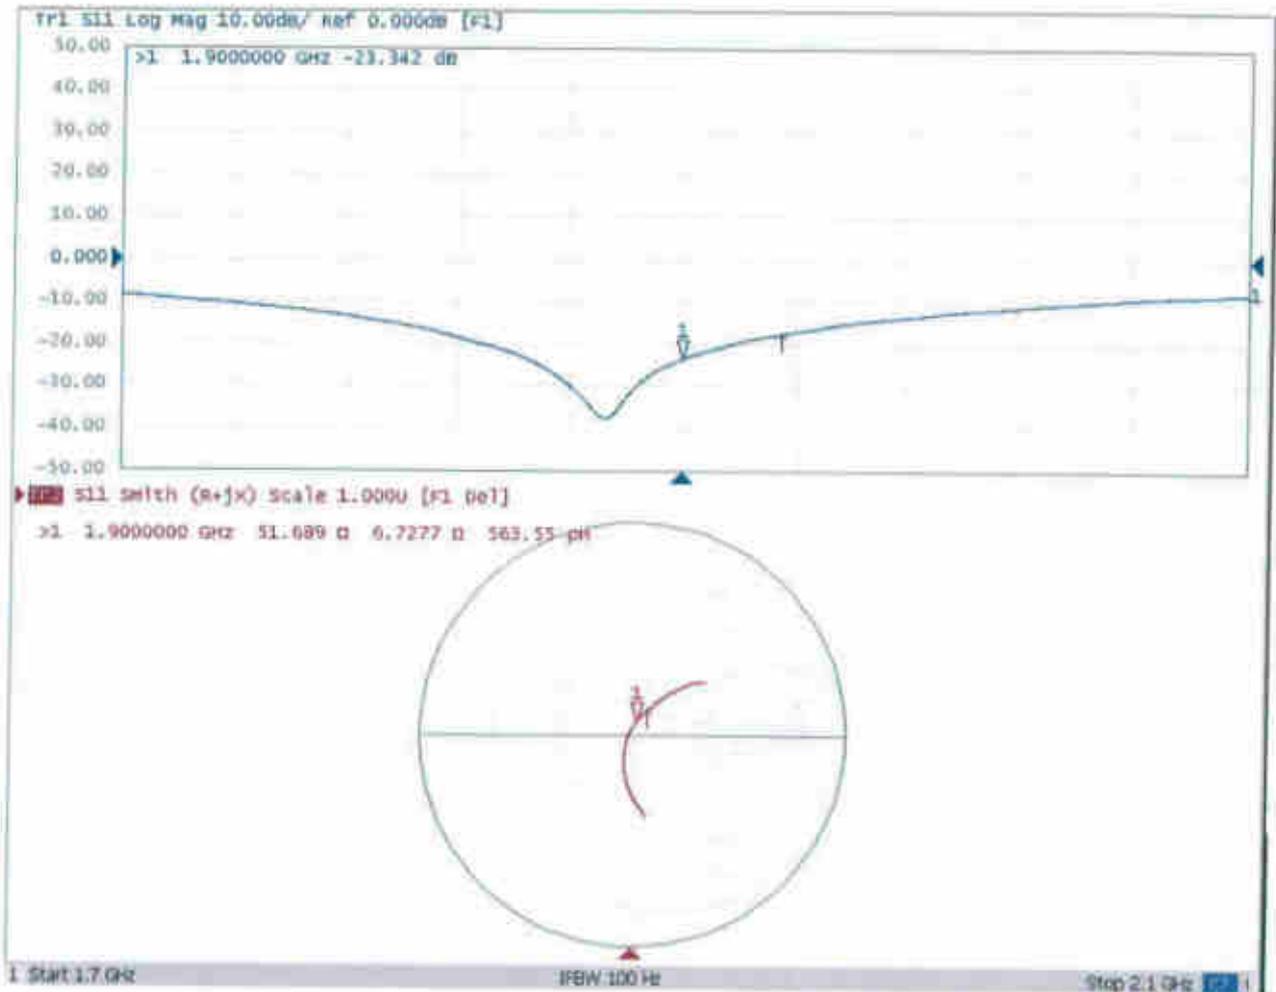



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

DASY5 Validation Report for Body TSL

Date: 03.26.2019

Test Laboratory: CTTL, Beijing, China

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d170

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.56$ S/m; $\epsilon_r = 54.52$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3617; ConvF(7.78, 7.78, 7.78) @ 1900 MHz; Calibrated: 1/31/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1331; Calibrated: 2/6/2019
- Phantom: MFP_V5.1C ; Type: QD 000 P51CA; Serial: 1062
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

System Performance Check/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:


$dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 95.48 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 18.6 W/kg

SAR(1 g) = 10.1 W/kg; SAR(10 g) = 5.28 W/kg

Maximum value of SAR (measured) = 15.7 W/kg

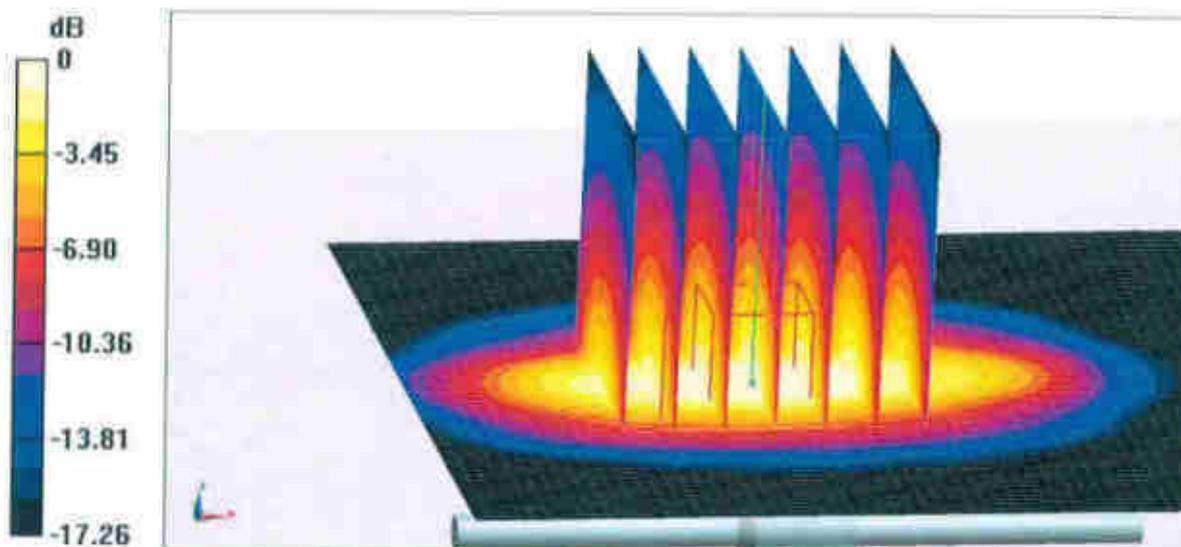


0 dB = 15.7 W/kg = 11.96 dBW/kg



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Impedance Measurement Plot for Body TSL

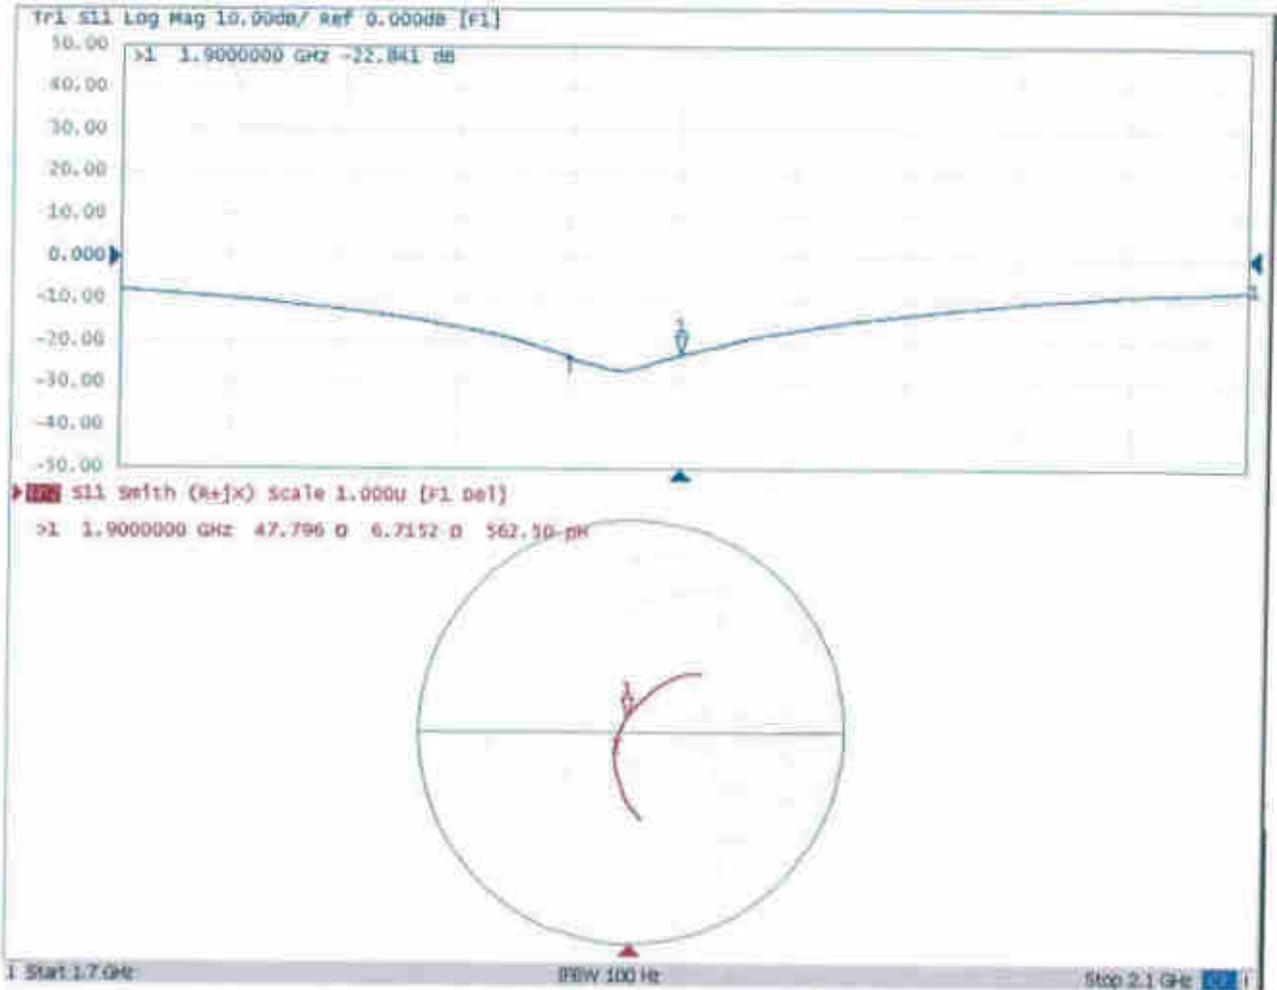



D1900V2, Serial No. 5d170 Extended Dipole Calibrations

Referring to KDB 865664 D01 v01r02, if dipoles are verified in return loss ($< -20\text{dB}$, within 20% of prior calibration), and in impedance (within 5 ohm of prior calibration), the annual calibration is not necessary and the calibration interval can be extended.

1900V2 – serial no. 5d170


| Date of Measurement | 1900 Head | | | | | | 1900 Body | | | | | |
|---------------------|------------------|-----------|----------------------|-------------|---------------------------|-------------|------------------|-----------|----------------------|-------------|---------------------------|-------------|
| | Return-Loss (dB) | Delta (%) | Real Impedance (ohm) | Delta (ohm) | Imaginary Impedance (ohm) | Delta (ohm) | Return-Loss (dB) | Delta (%) | Real Impedance (ohm) | Delta (ohm) | Imaginary Impedance (ohm) | Delta (ohm) |
| 2019.3.26 | -23.3 | | 51.7 | | 6.7 | | -22.8 | | 47.8 | | 6.7 | |
| 2020.3.25 | -22.3 | 0.05 | 53.0 | -1.26 | 7.4 | -0.64 | -22.5 | 0.01 | 49.2 | -1.37 | 7.41 | -0.69 |

<Justification of the extended calibration>


The return loss is $< -20\text{dB}$, within 20% of prior calibration; the impedance is within 5 ohm of prior calibration. Therefore the verification result should support extended calibration.

Dipole Verification Data> D1900V2, serial no. 5d170

1900MHz – Head

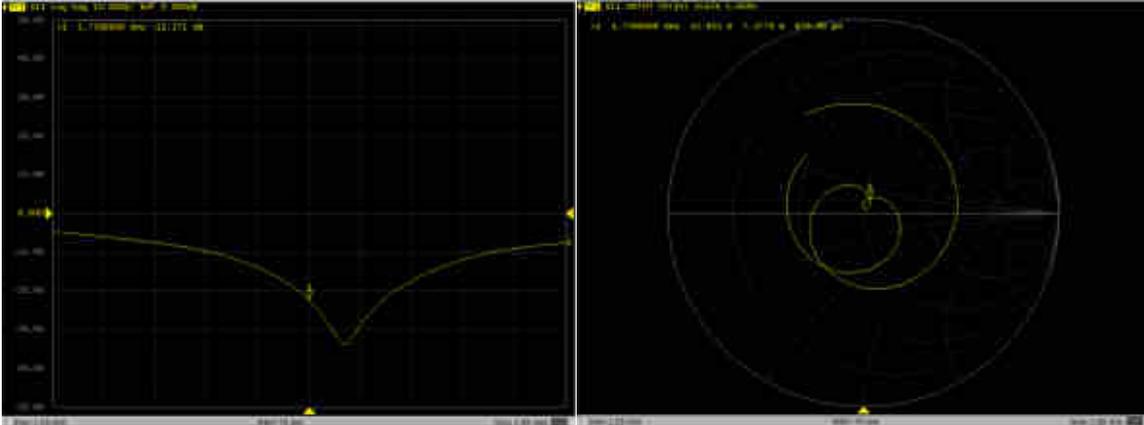

1900MHz – Body

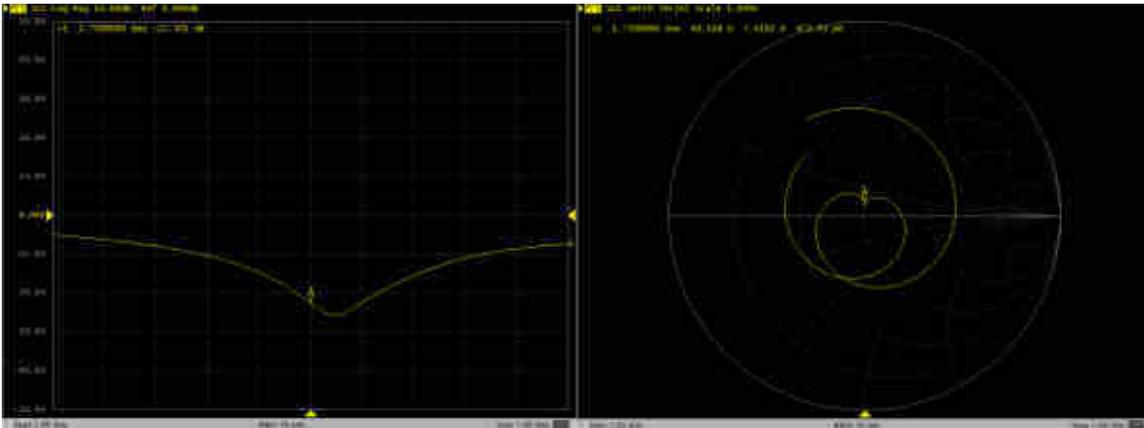



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Client **Sporton**

Certificate No: **Z18-60365**

CALIBRATION CERTIFICATE

Object **D2300V2 - SN: 1055**

Calibration Procedure(s) **FF-Z11-003-01**
Calibration Procedures for dipole validation kits

Calibration date: **September 20, 2018**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
|-------------------------|------------|------------------------------------------|-----------------------|
| Power Meter NRVD | 102083 | 01-Nov-17 (CTTL, No.J17X08756) | Oct-18 |
| Power sensor NRV-Z5 | 100542 | 01-Nov-17 (CTTL, No.J17X08756) | Oct-18 |
| Reference Probe EX3DV4 | SN 7514 | 27-Aug-18(SPEAG,No.EX3-7514_Aug18) | Aug-19 |
| DAE4 | SN 1555 | 20-Aug-18(SPEAG,No.DAE4-1555_Aug18) | Aug-19 |
| Secondary Standards | ID # | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
| Signal Generator E4438C | MY49071430 | 23-Jan-18 (CTTL, No.J18X00560) | Jan-19 |
| NetworkAnalyzer E5071C | MY46110673 | 24-Jan-18 (CTTL, No.J18X00561) | Jan-19 |

| | Name | Function | Signature |
|----------------|-------------|--------------------|-----------|
| Calibrated by: | Zhao Jing | SAR Test Engineer | |
| Reviewed by: | Lin Hao | SAR Test Engineer | |
| Approved by: | Qi Dianyuan | SAR Project Leader | |

Issued: September 23, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Glossary:

| | |
|-------|--------------------------------------------|
| TSL | tissue simulating liquid |
| ConvF | sensitivity in TSL / NORM _{x,y,z} |
| N/A | not applicable or not measured |

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices- Part 1: Device used next to the ear (Frequency range of 300MHz to 6GHz)", July 2016
- IEC 62209-2, "Procedure to measure the Specific Absorption Rate (SAR) For wireless communication devices used in close proximity to the human body (frequency range of 30MHz to 6GHz)", March 2010
- KDB865664, SAR Measurement Requirements for 100 MHz to 6 GHz

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor $k=2$, which for a normal distribution Corresponds to a coverage probability of approximately 95%.



Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|------------------------------|--------------------------|--------------|
| DASY Version | DASY52 | 52.10.1.1476 |
| Extrapolation | Advanced Extrapolation | |
| Phantom | Triple Flat Phantom 5.1C | |
| Distance Dipole Center - TSL | 10 mm | with Spacer |
| Zoom Scan Resolution | dx, dy, dz = 5 mm | |
| Frequency | 2300 MHz ± 1 MHz | |

Head TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Head TSL parameters | 22.0 °C | 39.5 | 1.67 mho/m |
| Measured Head TSL parameters | (22.0 ± 0.2) °C | 40.3 ± 6 % | 1.72 mho/m ± 6 % |
| Head TSL temperature change during test | <1.0 °C | --- | --- |

SAR result with Head TSL

| | | |
|---------------------------------------------------------|--------------------|----------------------------|
| SAR averaged over 1 cm ³ (1 g) of Head TSL | Condition | |
| SAR measured | 250 mW input power | 12.3 mW / g |
| SAR for nominal Head TSL parameters | normalized to 1W | 48.7 mW / g ± 18.8 % (k=2) |
| SAR averaged over 10 cm ³ (10 g) of Head TSL | Condition | |
| SAR measured | 250 mW input power | 5.82 mW / g |
| SAR for nominal Head TSL parameters | normalized to 1W | 23.2 mW / g ± 18.7 % (k=2) |

Body TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters | 22.0 °C | 52.9 | 1.81 mho/m |
| Measured Body TSL parameters | (22.0 ± 0.2) °C | 52.3 ± 6 % | 1.82 mho/m ± 6 % |
| Body TSL temperature change during test | <1.0 °C | --- | --- |

SAR result with Body TSL

| | | |
|---------------------------------------------------------|--------------------|----------------------------|
| SAR averaged over 1 cm ³ (1 g) of Body TSL | Condition | |
| SAR measured | 250 mW input power | 11.9 mW / g |
| SAR for nominal Body TSL parameters | normalized to 1W | 47.6 mW / g ± 18.8 % (k=2) |
| SAR averaged over 10 cm ³ (10 g) of Body TSL | Condition | |
| SAR measured | 250 mW input power | 5.64 mW / g |
| SAR for nominal Body TSL parameters | normalized to 1W | 22.6 mW / g ± 18.7 % (k=2) |



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Appendix (Additional assessments outside the scope of CNAS L0570)

Antenna Parameters with Head TSL

| | |
|--------------------------------------|---------------|
| Impedance, transformed to feed point | 45.6Ω- 2.03jΩ |
| Return Loss | - 25.9dB |

Antenna Parameters with Body TSL

| | |
|--------------------------------------|---------------|
| Impedance, transformed to feed point | 44.0Ω- 0.86jΩ |
| Return Loss | - 23.8dB |

General Antenna Parameters and Design

| | |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.034 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

| | |
|-----------------|-------|
| Manufactured by | SPEAG |
|-----------------|-------|

DASY5 Validation Report for Head TSL

Date: 09.20.2018

Test Laboratory: CTTL, Beijing, China

DUT: Dipole 2300 MHz; Type: D2300V2; Serial: D2300V2 - SN: 1055

Communication System: UID 0, CW; Frequency: 2300 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2300$ MHz; $\sigma = 1.718$ S/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7514; ConvF(7.42, 7.42, 7.42) @ 2300 MHz; Calibrated: 8/27/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1555; Calibrated: 8/20/2018
- Phantom: MFP_V5.1C ; Type: QD 000 P51CA; Serial: 1062
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)


Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 97.59 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 25.4 W/kg

SAR(1 g) = 12.3 W/kg; SAR(10 g) = 5.82 W/kg

Maximum value of SAR (measured) = 20.4 W/kg

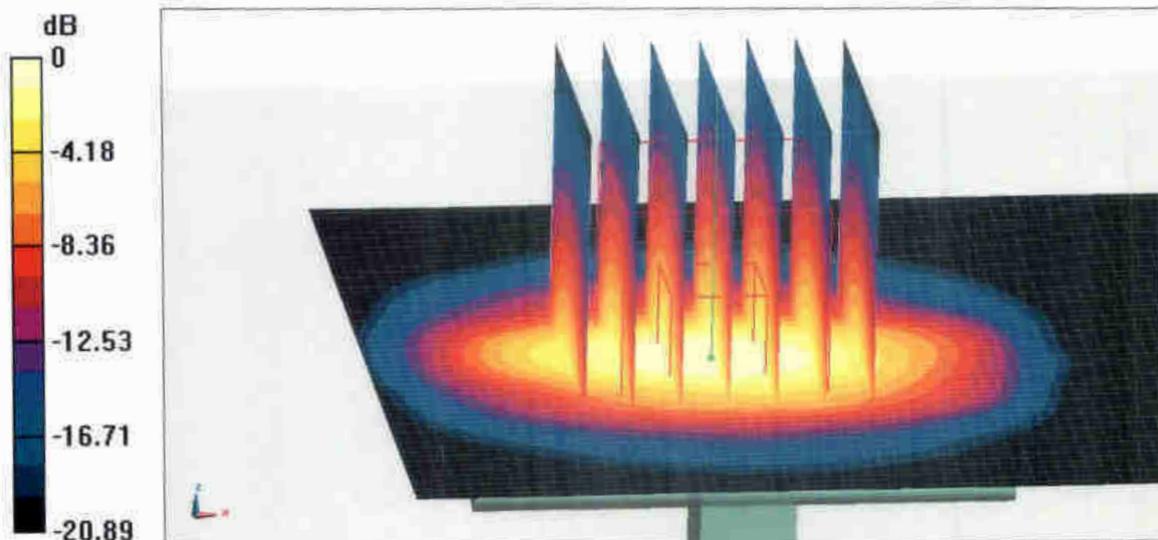


0 dB = 20.4 W/kg = 13.10 dBW/kg



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Impedance Measurement Plot for Head TSL

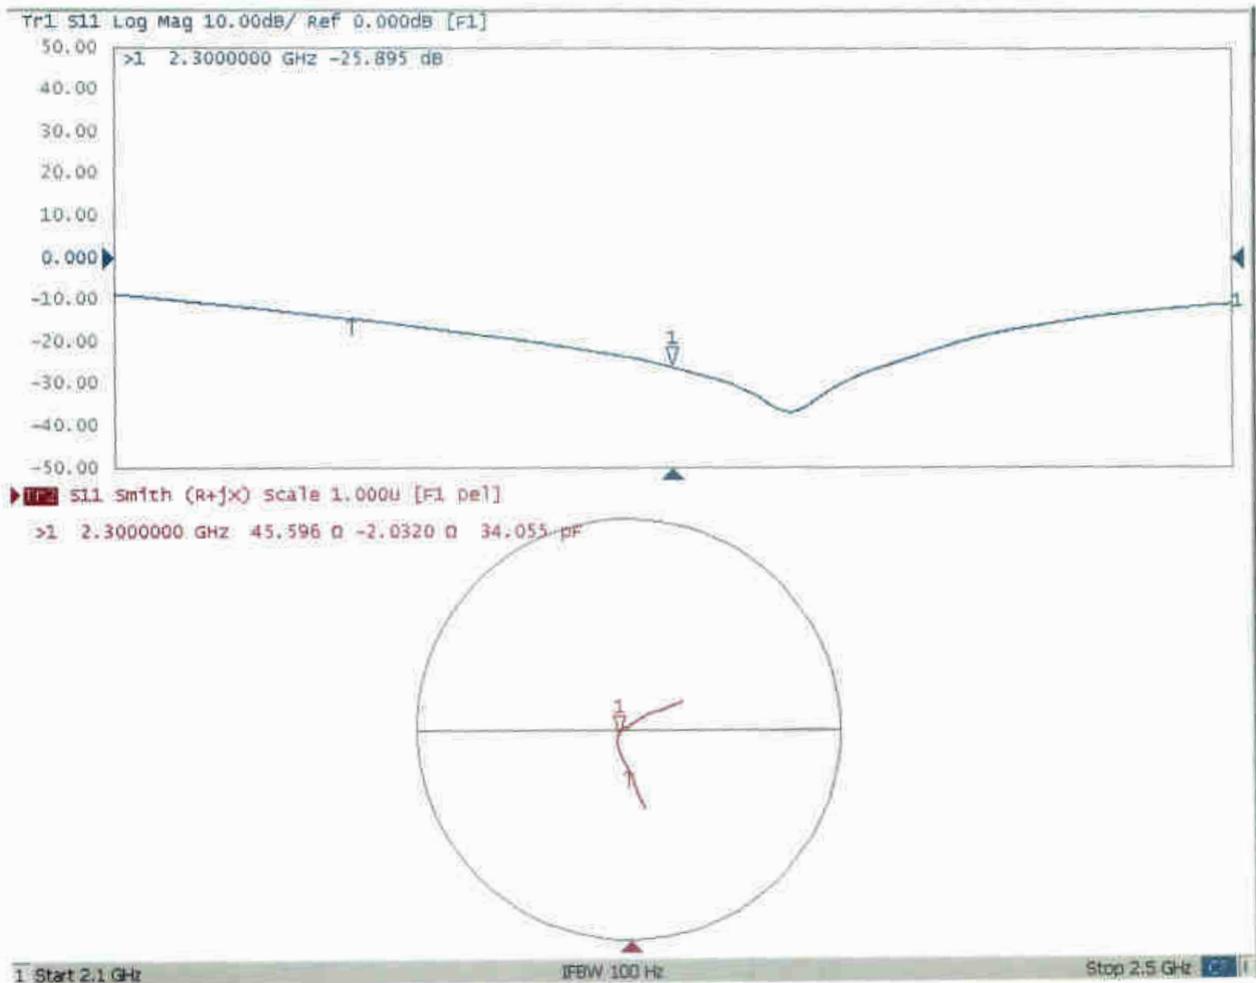

DASY5 Validation Report for Body TSL

Date: 09.20.2018

Test Laboratory: CTTL, Beijing, China

DUT: Dipole 2300 MHz; Type: D2300V2; Serial: D2300V2 - SN: 1055

Communication System: UID 0, CW; Frequency: 2300 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2300$ MHz; $\sigma = 1.834$ S/m; $\epsilon_r = 54.44$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7514; ConvF(7.25, 7.25, 7.25) @ 2300 MHz; Calibrated: 8/27/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1555; Calibrated: 8/20/2018
- Phantom: MFP_V5.1C ; Type: QD 000 P51CA; Serial: 1062
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)


Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 97.37 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 23.9 W/kg

SAR(1 g) = 11.9 W/kg; SAR(10 g) = 5.64 W/kg

Maximum value of SAR (measured) = 19.4 W/kg

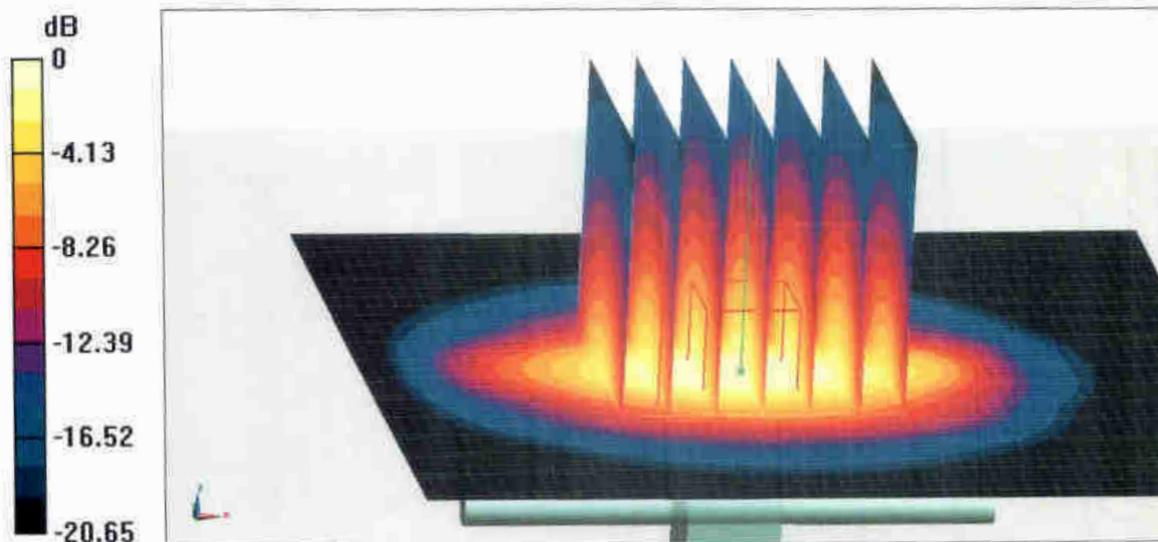


0 dB = 19.4 W/kg = 12.88 dBW/kg



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Impedance Measurement Plot for Body TSL

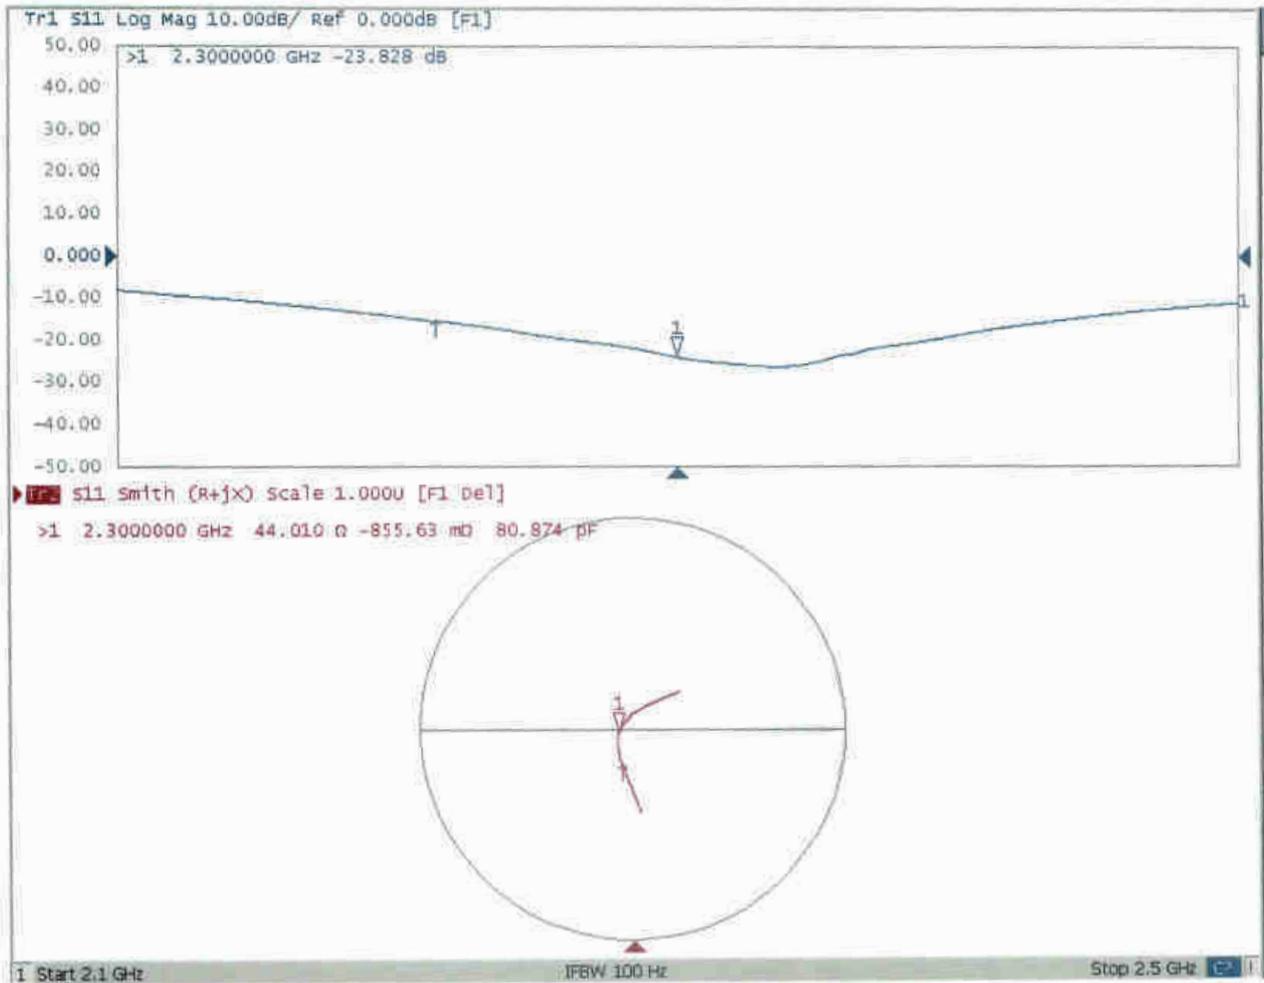

D2300V2, Serial No. 1055 Extended Dipole Calibrations

Referring to KDB 865664 D01 v01r02, if dipoles are verified in return loss (<-20dB, within 20% of prior calibration), and in impedance (within 5 ohm of prior calibration), the annual calibration is not necessary and the calibration interval can be extended.


| 2300V2 – serial no. 1055 | | | | | | |
|--------------------------|------------------|-----------|----------------------|-------------|---------------------------|-------------|
| 2300 Head | | | | | | |
| Date of Measurement | Return-Loss (dB) | Delta (%) | Real Impedance (ohm) | Delta (ohm) | Imaginary Impedance (ohm) | Delta (ohm) |
| 2018.09.20 | -25.9 | | 45.6 | | -2.03 | |
| 2019.09.19 | -25.3 | 0.02 | 46.1 | -0.5 | -2.09 | 0.06 |

<Justification of the extended calibration>

The return loss is < -20dB, within 20% of prior calibration; the impedance is within 5 ohm of prior calibration. Therefore the verification result should support extended calibration.

Dipole Verification Data> D2300V2, serial no. 1055

2300MHz – Head

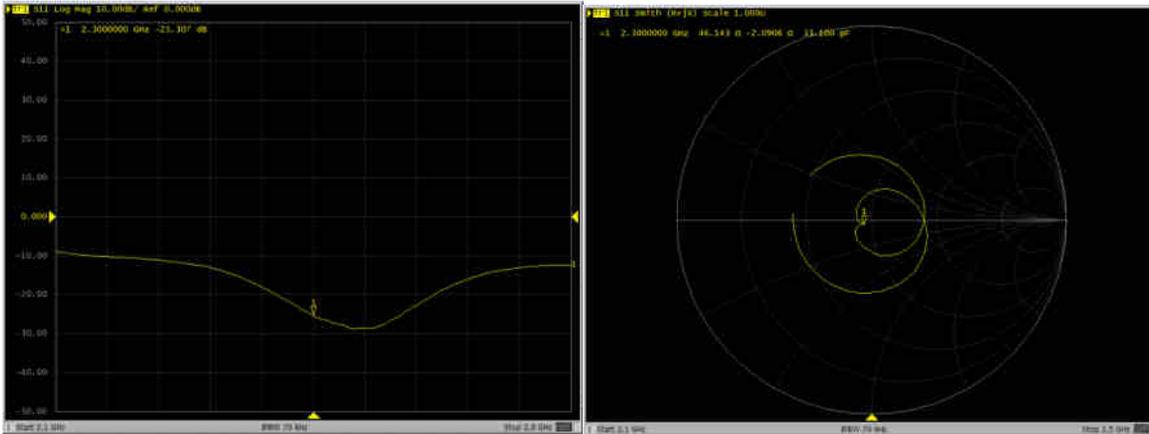



In Collaboration with
s p e a g
CALIBRATION LABORATORY



中国认可
国际互认
校准
CALIBRATION
CNAS L0570

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Client **Sporton**

Certificate No: **Z19-60087**

CALIBRATION CERTIFICATE

Object **D2450V2 - SN: 908**

Calibration Procedure(s) **FF-Z11-003-01**
Calibration Procedures for dipole validation kits

Calibration date: **March 25, 2019**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
|-------------------------|------------|------------------------------------------|-----------------------|
| Power Meter NRP2 | 106277 | 20-Aug-18 (CTTL, No.J18X06862) | Aug-19 |
| Power sensor NRP8S | 104291 | 20-Aug-18 (CTTL, No.J18X06862) | Aug-19 |
| Reference Probe EX3DV4 | SN 3617 | 31-Jan-19(SPEAG,No.EX3-3617_Jan19) | Jan-20 |
| DAE4 | SN 1331 | 06-Feb-19(SPEAG,No.DAE4-1331_Feb19) | Feb-20 |
| Secondary Standards | ID # | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
| Signal Generator E4438C | MY49071430 | 23-Jan-19 (CTTL, No.J19X00336) | Jan-20 |
| NetworkAnalyzer E5071C | MY46110673 | 24-Jan-19 (CTTL, No.J19X00547) | Jan-20 |

| | Name | Function | Signature |
|----------------|-------------|--------------------|-----------|
| Calibrated by: | Zhao Jing | SAR Test Engineer | |
| Reviewed by: | Lin Hao | SAR Test Engineer | |
| Approved by: | Qi Dianyuan | SAR Project Leader | |

Issued: March 28, 2019

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



In Collaboration with

s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Glossary:

| | |
|-------|--------------------------------------------|
| TSL | tissue simulating liquid |
| ConvF | sensitivity in TSL / NORM _{x,y,z} |
| N/A | not applicable or not measured |

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices- Part 1: Device used next to the ear (Frequency range of 300MHz to 6GHz)", July 2016
- IEC 62209-2, "Procedure to measure the Specific Absorption Rate (SAR) For wireless communication devices used in close proximity to the human body (frequency range of 30MHz to 6GHz)", March 2010
- KDB865664, SAR Measurement Requirements for 100 MHz to 6 GHz

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor $k=2$, which for a normal distribution Corresponds to a coverage probability of approximately 95%.



Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|------------------------------|--------------------------|--------------|
| DASY Version | DASY52 | 52.10.2.1495 |
| Extrapolation | Advanced Extrapolation | |
| Phantom | Triple Flat Phantom 5.1C | |
| Distance Dipole Center - TSL | 10 mm | with Spacer |
| Zoom Scan Resolution | dx, dy, dz = 5 mm | |
| Frequency | 2450 MHz ± 1 MHz | |

Head TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Head TSL parameters | 22.0 °C | 39.2 | 1.80 mho/m |
| Measured Head TSL parameters | (22.0 ± 0.2) °C | 39.6 ± 6 % | 1.84 mho/m ± 6 % |
| Head TSL temperature change during test | <1.0 °C | --- | --- |

SAR result with Head TSL

| | | |
|---------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 1 cm ³ (1 g) of Head TSL | Condition | |
| SAR measured | 250 mW input power | 13.3 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 52.8 W/kg ± 18.6 % (k=2) |
| SAR averaged over 10 cm ³ (10 g) of Head TSL | Condition | |
| SAR measured | 250 mW input power | 6.07 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 24.2 W/kg ± 18.7 % (k=2) |

Body TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters | 22.0 °C | 52.7 | 1.95 mho/m |
| Measured Body TSL parameters | (22.0 ± 0.2) °C | 53.8 ± 6 % | 2.00 mho/m ± 6 % |
| Body TSL temperature change during test | <1.0 °C | --- | --- |

SAR result with Body TSL

| | | |
|---------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 1 cm ³ (1 g) of Body TSL | Condition | |
| SAR measured | 250 mW input power | 12.8 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | 50.8 W/kg ± 18.8 % (k=2) |
| SAR averaged over 10 cm ³ (10 g) of Body TSL | Condition | |
| SAR measured | 250 mW input power | 5.91 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | 23.6 W/kg ± 18.7 % (k=2) |



Appendix (Additional assessments outside the scope of CNAS L0570)

Antenna Parameters with Head TSL

| | |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $57.3\Omega + 5.18 j\Omega$ |
| Return Loss | - 21.6dB |

Antenna Parameters with Body TSL

| | |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $52.6\Omega + 5.81 j\Omega$ |
| Return Loss | - 24.1dB |

General Antenna Parameters and Design

| | |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.020 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

| | |
|-----------------|-------|
| Manufactured by | SPEAG |
|-----------------|-------|

DASY5 Validation Report for Head TSL

Date: 03.25.2019

Test Laboratory: CTTL, Beijing, China

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 908

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.841$ S/m; $\epsilon_r = 39.63$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3617; ConvF(7.62, 7.62, 7.62) @ 2450 MHz; Calibrated: 1/31/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1331; Calibrated: 2/6/2019
- Phantom: MFP_V5.1C ; Type: QD 000 P51CA; Serial: 1062
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)


Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.04 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 28.3 W/kg

SAR(1 g) = 13.3 W/kg; SAR(10 g) = 6.07 W/kg

Maximum value of SAR (measured) = 22.4 W/kg

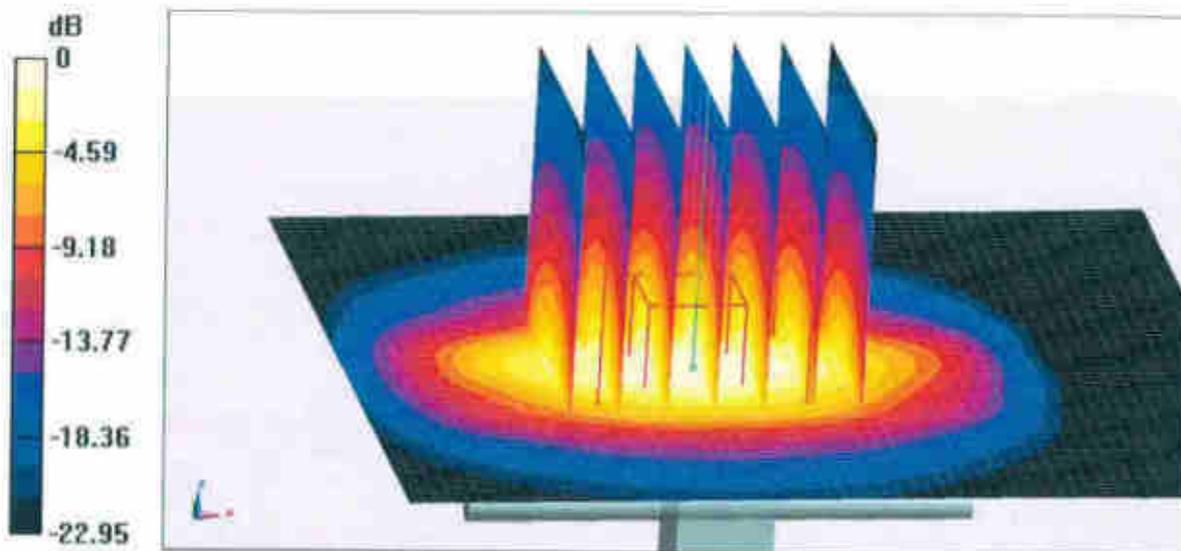


0 dB = 22.4 W/kg = 13.50 dBW/kg



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Impedance Measurement Plot for Head TSL

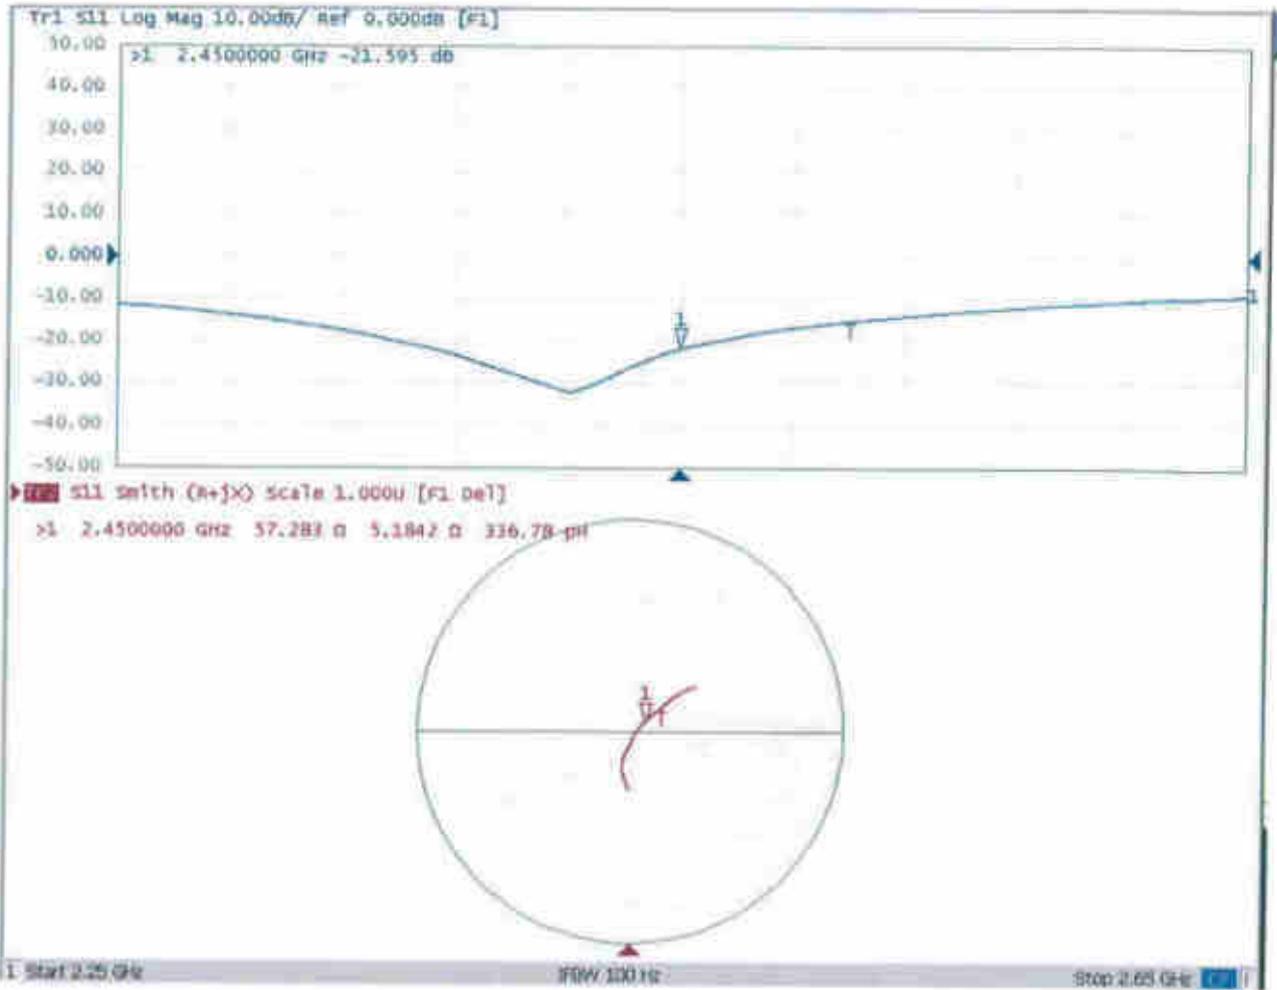



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

DASY5 Validation Report for Body TSL

Date: 03.25.2019

Test Laboratory: CTTL, Beijing, China

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 908

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 2.003$ S/m; $\epsilon_r = 53.78$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3617; ConvF(7.79, 7.79, 7.79) @ 2450 MHz; Calibrated: 1/31/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1331; Calibrated: 2/6/2019
- Phantom: MFP_V5.1C ; Type: QD 000 P51CA; Serial: 1062
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)


Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.51 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 27.1 W/kg

SAR(1 g) = 12.8 W/kg; SAR(10 g) = 5.91 W/kg

Maximum value of SAR (measured) = 21.4 W/kg

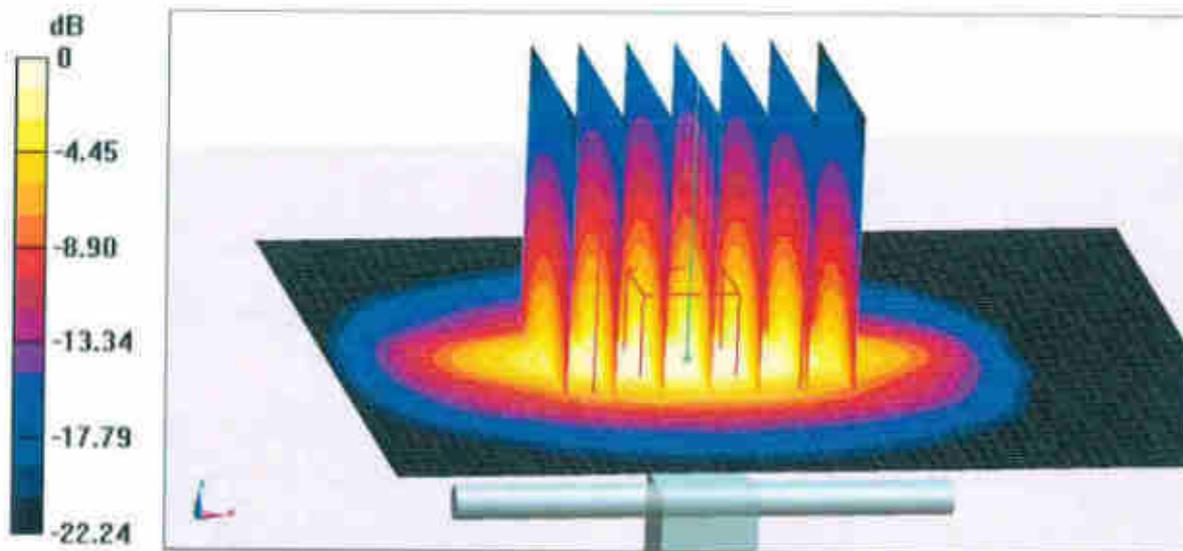


0 dB = 21.4 W/kg = 13.30 dBW/kg



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Impedance Measurement Plot for Body TSL

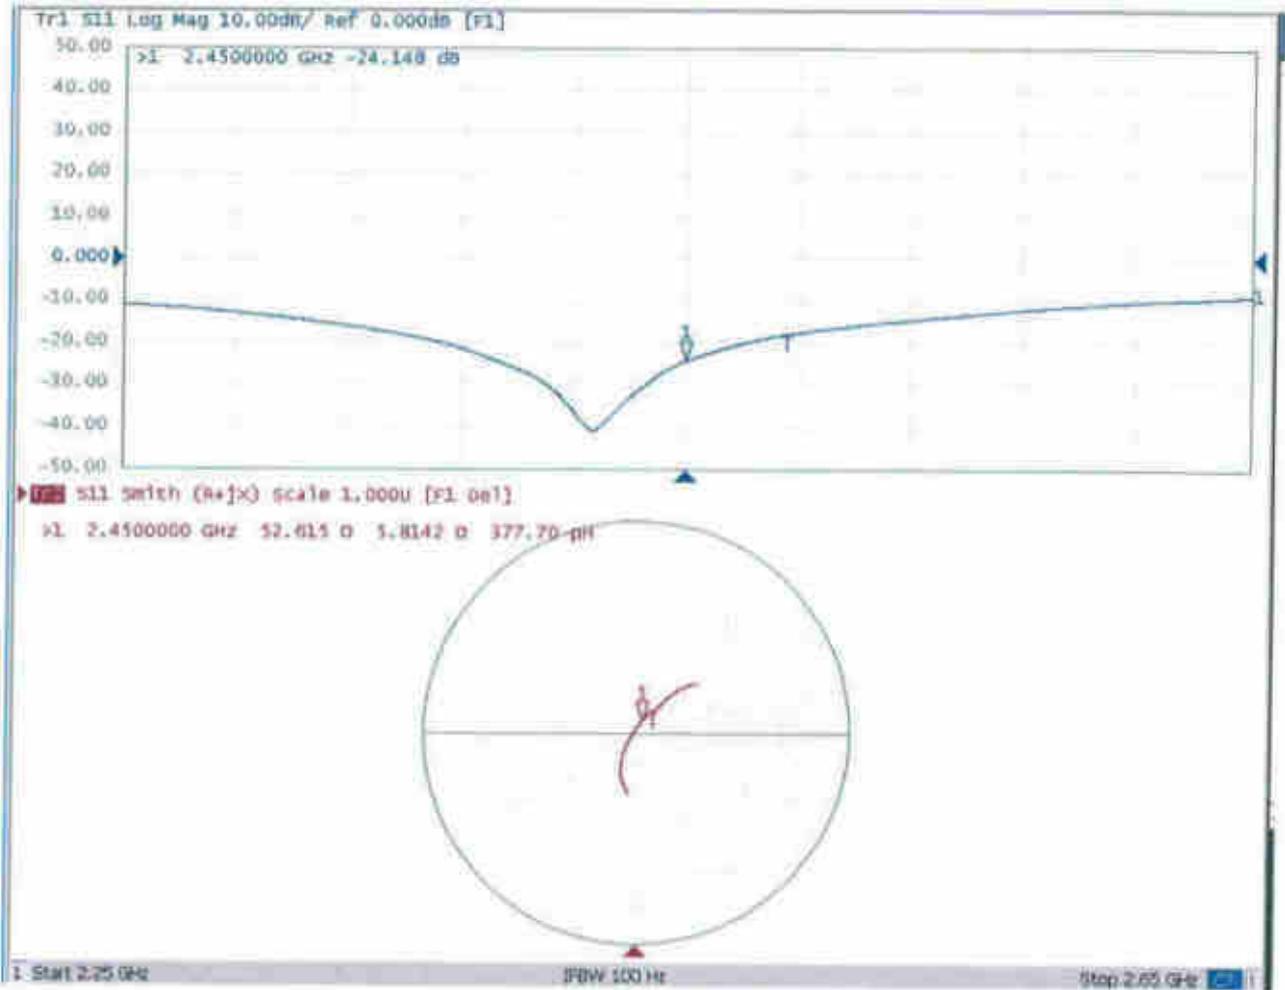



D2450V2, Serial No. 908 Extended Dipole Calibrations

Referring to KDB 865664 D01 v01r02, if dipoles are verified in return loss ($< -20\text{dB}$, within 20% of prior calibration), and in impedance (within 5 ohm of prior calibration), the annual calibration is not necessary and the calibration interval can be extended.

2450V2 – serial no. 908


| 2450V2 – serial no. 908 | | | | | | | | | | | | |
|-------------------------|------------------|-----------|----------------------|-------------|---------------------------|-------------|------------------|-----------|----------------------|-------------|---------------------------|-------------|
| | 2450 Head | | | | | | 2450 Body | | | | | |
| Date of Measurement | Return-Loss (dB) | Delta (%) | Real Impedance (ohm) | Delta (ohm) | Imaginary Impedance (ohm) | Delta (ohm) | Return-Loss (dB) | Delta (%) | Real Impedance (ohm) | Delta (ohm) | Imaginary Impedance (ohm) | Delta (ohm) |
| 2019.3.25 | -21.6 | | 57.3 | | 5.2 | | -24.1 | | 52.6 | | 5.8 | |
| 2020.3.24 | -22.7 | -0.05 | 57.5 | -0.18 | 2.4 | 2.81 | -26.1 | -0.08 | 55.01 | -2.40 | 1.493 | 4.32 |

<Justification of the extended calibration>


The return loss is $< -20\text{dB}$, within 20% of prior calibration; the impedance is within 5 ohm of prior calibration. Therefore the verification result should support extended calibration.

Dipole Verification Data> D2450V2, serial no. 908

2450MHz – Head

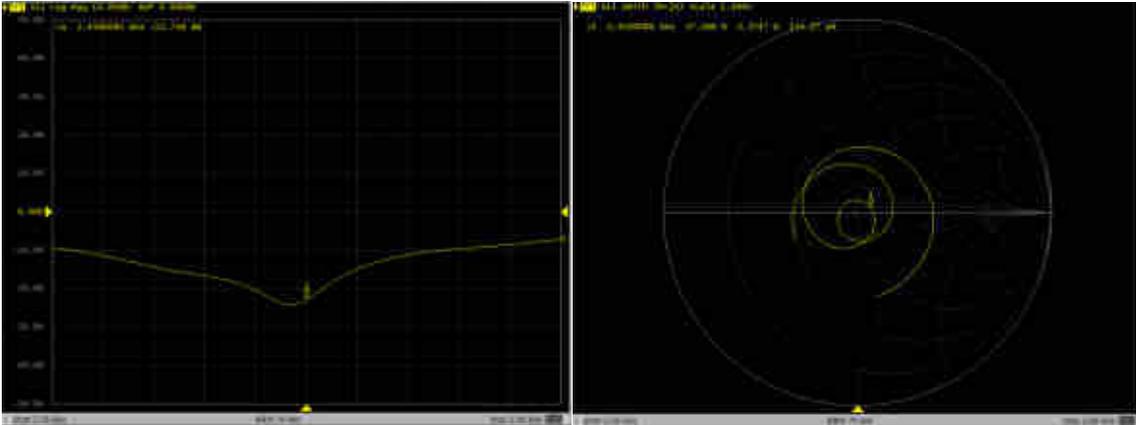

2450MHz – Body

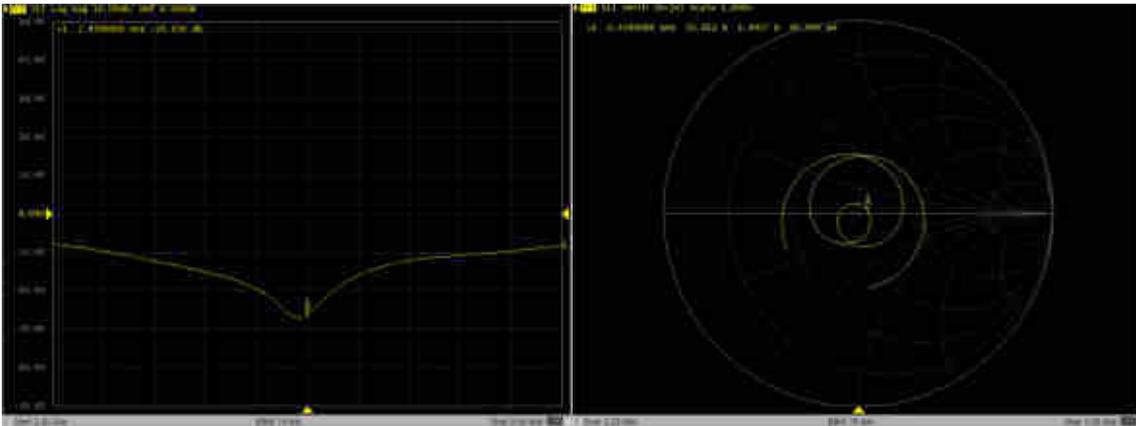



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **Sporton**

Certificate No: **D5GHzV2-1113_Sep19**

CALIBRATION CERTIFICATE

Object: **D5GHzV2 - SN:1113**

Calibration procedure(s): **QA CAL-22.v4
Calibration Procedure for SAR Validation Sources between 3-6 GHz**

Calibration date: **September 24, 2019**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|-----------------------------|--------------------|---------------------------------|-----------------------|
| Power meter NRP | SN: 104778 | 03-Apr-19 (No. 217-02892/02893) | Apr-20 |
| Power sensor NRP-Z91 | SN: 103244 | 03-Apr-19 (No. 217-02892) | Apr-20 |
| Power sensor NRP-Z91 | SN: 103245 | 03-Apr-19 (No. 217-02893) | Apr-20 |
| Reference 20 dB Attenuator | SN: 5058 (20k) | 04-Apr-19 (No. 217-02894) | Apr-20 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 04-Apr-19 (No. 217-02895) | Apr-20 |
| Reference Probe EX3DV4 | SN: 3503 | 25-Mar-19 (No. EX3-3503_Mar19) | Mar-20 |
| DAE4 | SN: 601 | 30-Apr-19 (No. DAE4-601_Apr19) | Apr-20 |

| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
|---------------------------------|----------------|-----------------------------------|------------------------|
| Power meter E4419B | SN: GB39512475 | 30-Oct-14 (in house check Feb-19) | In house check: Oct-20 |
| Power sensor HP 8481A | SN: US37292783 | 07-Oct-15 (in house check Oct-18) | In house check: Oct-20 |
| Power sensor HP 8481A | SN: MY41092317 | 07-Oct-15 (in house check Oct-18) | In house check: Oct-20 |
| RF generator R&S SMT-06 | SN: 100972 | 15-Jun-15 (in house check Oct-18) | In house check: Oct-20 |
| Network Analyzer Agilent E8358A | SN: US41080477 | 31-Mar-14 (in house check Oct-18) | In house check: Oct-19 |

| | | | |
|----------------|-------------------------------|------------------------------------------|---------------|
| Calibrated by: | Name Jeton Kastrati | Function Laboratory Technician | Signature |
| Approved by: | Name Katja Pokovic | Function Technical Manager | Signature |

Issued: September 25, 2019

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Glossary:

| | |
|-------|---------------------------------|
| TSL | tissue simulating liquid |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A | not applicable or not measured |

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|------------------------------|----------------------------------------------------------|----------------------------------|
| DASY Version | DASY5 | V52.10.2 |
| Extrapolation | Advanced Extrapolation | |
| Phantom | Modular Flat Phantom V5.0 | |
| Distance Dipole Center - TSL | 10 mm | with Spacer |
| Zoom Scan Resolution | dx, dy = 4.0 mm, dz = 1.4 mm | Graded Ratio = 1.4 (Z direction) |
| Frequency | 5250 MHz ± 1 MHz 5600 MHz ± 1 MHz 5750 MHz ± 1 MHz | |

Head TSL parameters at 5250 MHz

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Head TSL parameters | 22.0 °C | 35.9 | 4.71 mho/m |
| Measured Head TSL parameters | (22.0 ± 0.2) °C | 35.1 ± 6 % | 4.53 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C | --- | --- |

SAR result with Head TSL at 5250 MHz

| SAR averaged over 1 cm ³ (1 g) of Head TSL | Condition | |
|-------------------------------------------------------|--------------------|---------------------------------|
| SAR measured | 100 mW input power | 8.09 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 80.5 W/kg ± 19.9 % (k=2) |

| SAR averaged over 10 cm ³ (10 g) of Head TSL | condition | |
|---------------------------------------------------------|--------------------|---------------------------------|
| SAR measured | 100 mW input power | 2.33 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 23.1 W/kg ± 19.5 % (k=2) |

Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Head TSL parameters | 22.0 °C | 35.5 | 5.07 mho/m |
| Measured Head TSL parameters | (22.0 ± 0.2) °C | 34.6 ± 6 % | 4.88 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C | --- | --- |

SAR result with Head TSL at 5600 MHz

| SAR averaged over 1 cm ³ (1 g) of Head TSL | Condition | |
|-------------------------------------------------------|--------------------|---------------------------------|
| SAR measured | 100 mW input power | 8.40 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 83.4 W/kg ± 19.9 % (k=2) |

| SAR averaged over 10 cm ³ (10 g) of Head TSL | condition | |
|---------------------------------------------------------|--------------------|---------------------------------|
| SAR measured | 100 mW input power | 2.40 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 23.8 W/kg ± 19.5 % (k=2) |

Head TSL parameters at 5750 MHz

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Head TSL parameters | 22.0 °C | 35.4 | 5.22 mho/m |
| Measured Head TSL parameters | (22.0 ± 0.2) °C | 34.4 ± 6 % | 5.03 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Head TSL at 5750 MHz

| SAR averaged over 1 cm ³ (1 g) of Head TSL | Condition | |
|-------------------------------------------------------|--------------------|---------------------------------|
| SAR measured | 100 mW input power | 8.06 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 80.0 W/kg ± 19.9 % (k=2) |

| SAR averaged over 10 cm ³ (10 g) of Head TSL | condition | |
|---------------------------------------------------------|--------------------|---------------------------------|
| SAR measured | 100 mW input power | 2.30 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 22.8 W/kg ± 19.5 % (k=2) |

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL at 5250 MHz

| | |
|--------------------------------------|-------------------------------|
| Impedance, transformed to feed point | 51.7 Ω - 6.2 $j\Omega$ |
| Return Loss | - 24.0 dB |

Antenna Parameters with Head TSL at 5600 MHz

| | |
|--------------------------------------|-------------------------------|
| Impedance, transformed to feed point | 56.0 Ω - 2.7 $j\Omega$ |
| Return Loss | - 24.1 dB |

Antenna Parameters with Head TSL at 5750 MHz

| | |
|--------------------------------------|-------------------------------|
| Impedance, transformed to feed point | 56.7 Ω - 1.0 $j\Omega$ |
| Return Loss | - 23.9 dB |

General Antenna Parameters and Design

| | |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.195 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

| | |
|-----------------|-------|
| Manufactured by | SPEAG |
|-----------------|-------|

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1113

Communication System: UID 0 - CW; Frequency: 5250 MHz, Frequency: 5600 MHz,
Frequency: 5750 MHz

Medium parameters used: $f = 5250$ MHz; $\sigma = 4.53$ S/m; $\epsilon_r = 35.1$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5600$ MHz; $\sigma = 4.88$ S/m; $\epsilon_r = 34.6$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5750$ MHz; $\sigma = 5.03$ S/m; $\epsilon_r = 34.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.4, 5.4, 5.4) @ 5250 MHz, ConvF(4.95, 4.95, 4.95) @ 5600 MHz, ConvF(4.98, 4.98, 4.98) @ 5750 MHz; Calibrated: 25.03.2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2019
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.2(1504); SEMCAD X 14.6.12(7470)

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5250 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 78.54 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 27.9 W/kg

SAR(1 g) = 8.09 W/kg; SAR(10 g) = 2.33 W/kg

Maximum value of SAR (measured) = 18.1 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 78.00 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 31.1 W/kg

SAR(1 g) = 8.40 W/kg; SAR(10 g) = 2.40 W/kg

Maximum value of SAR (measured) = 19.4 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5750 MHz/Zoom Scan,



dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 75.13 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 31.8 W/kg


SAR(1 g) = 8.06 W/kg; SAR(10 g) = 2.30 W/kg

Maximum value of SAR (measured) = 19.0 W/kg

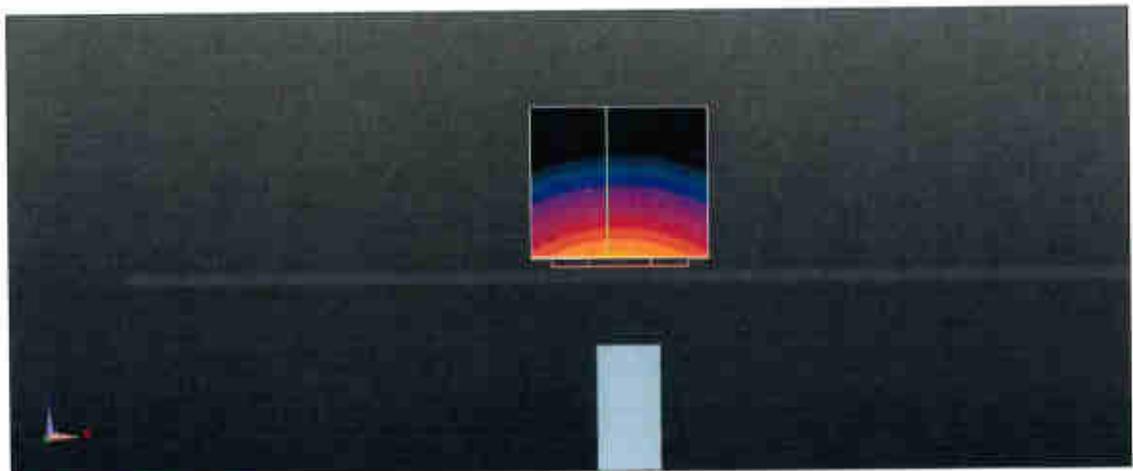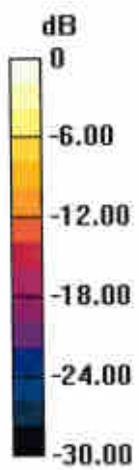

0 dB = 18.1 W/kg = 12.58 dBW/kg

Impedance Measurement Plot for Head TSL

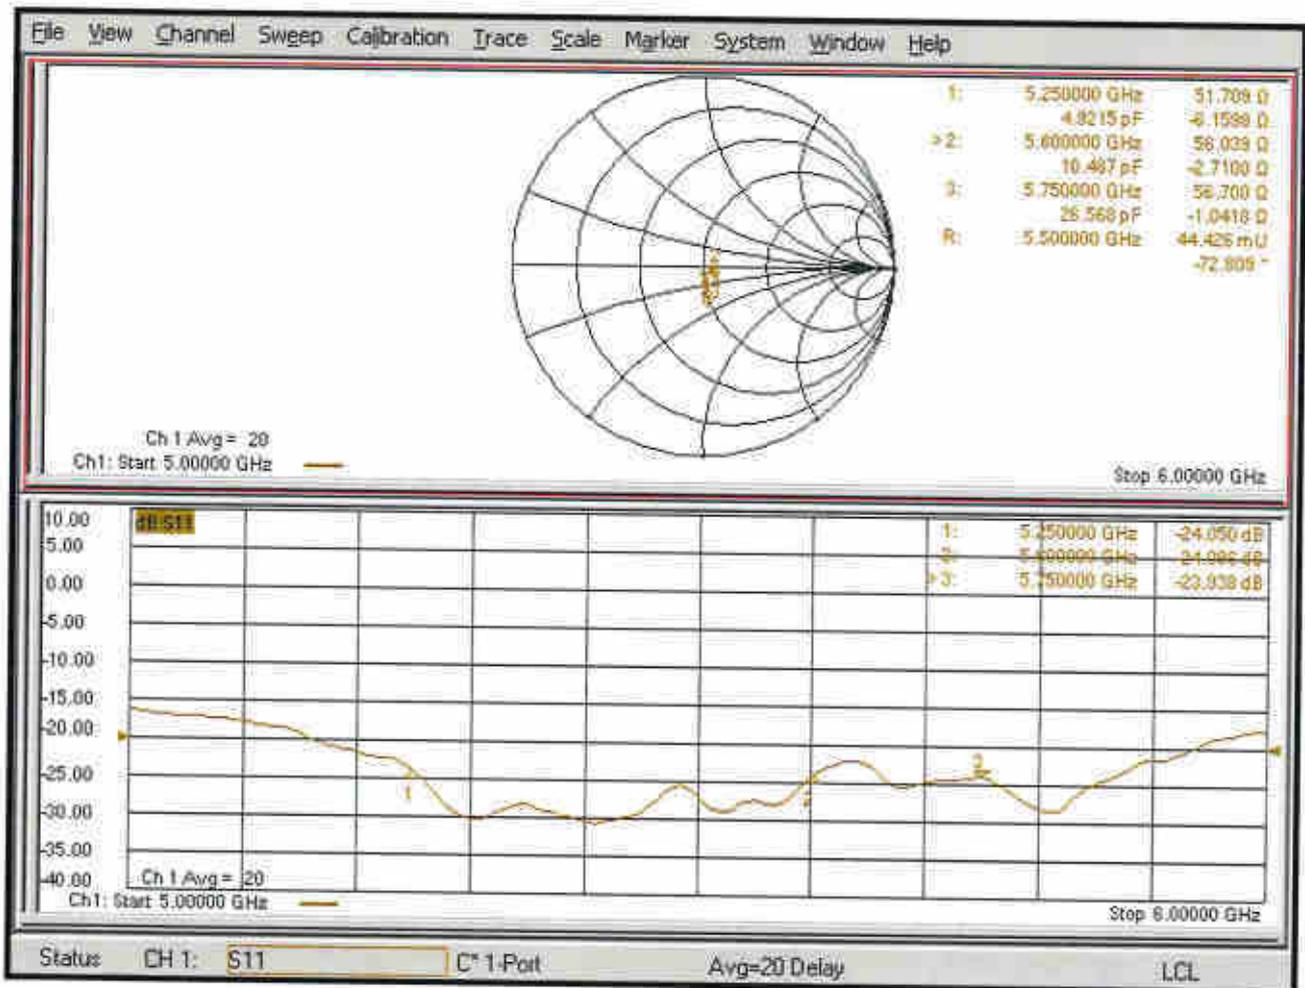



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **Sporton**

Certificate No: **DAE4-1358_Apr20**

CALIBRATION CERTIFICATE

Object **DAE4 - SD 000 D04 BN - SN: 1358**

Calibration procedure(s) **QA CAL-06.v30
Calibration procedure for the data acquisition electronics (DAE)**

Calibration date: **April 28, 2020**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|-------------------------------|--------------------|----------------------------|------------------------|
| Keithley Multimeter Type 2001 | SN: 0810278 | 03-Sep-19 (No:25949) | Sep-20 |
| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
| Auto DAE Calibration Unit | SE UWS 053 AA 1001 | 09-Jan-20 (in house check) | In house check: Jan-21 |
| Calibrator Box V2.1 | SE UMS 006 AA 1002 | 09-Jan-20 (in house check) | In house check: Jan-21 |

Calibrated by: **Name** Eric Hainfeld **Function** Laboratory Technician

Approved by: **Name** Sven Kühn **Function** Deputy Manager

Signature




Issued: April 29, 2020

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary

| | |
|-----------------|-----------------------------------------------------------------------------------------|
| DAE | data acquisition electronics |
| Connector angle | information used in DASY system to align probe sensor X to the robot coordinate system. |

Methods Applied and Interpretation of Parameters

- *DC Voltage Measurement*: Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle*: The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
 - *DC Voltage Measurement Linearity*: Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
 - *Common mode sensitivity*: Influence of a positive or negative common mode voltage on the differential measurement.
 - *Channel separation*: Influence of a voltage on the neighbor channels not subject to an input voltage.
 - *AD Converter Values with inputs shorted*: Values on the internal AD converter corresponding to zero input voltage
 - *Input Offset Measurement*: Output voltage and statistical results over a large number of zero voltage measurements.
 - *Input Offset Current*: Typical value for information; Maximum channel input offset current, not considering the input resistance.
 - *Input resistance*: Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
 - *Low Battery Alarm Voltage*: Typical value for information. Below this voltage, a battery alarm signal is generated.
 - *Power consumption*: Typical value for information. Supply currents in various operating modes.

DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1 μ V , full range = -100...+300 mV

Low Range: 1LSB = 61nV , full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| Calibration Factors | X | Y | Z |
|---------------------|---------------------------|---------------------------|---------------------------|
| High Range | 403.411 \pm 0.02% (k=2) | 403.452 \pm 0.02% (k=2) | 403.463 \pm 0.02% (k=2) |
| Low Range | 3.96158 \pm 1.50% (k=2) | 3.98747 \pm 1.50% (k=2) | 3.99174 \pm 1.50% (k=2) |

Connector Angle

| | |
|-------------------------------------------|-------------------------------------|
| Connector Angle to be used in DASY system | 113.5 $^{\circ}$ \pm 1 $^{\circ}$ |
|-------------------------------------------|-------------------------------------|

Appendix (Additional assessments outside the scope of SCS0108)

1. DC Voltage Linearity

| High Range | Reading (μV) | Difference (μV) | Error (%) |
|-------------------|---------------------------|------------------------------|-----------|
| Channel X + Input | 200024.85 | -8.32 | -0.00 |
| Channel X + Input | 20005.36 | 0.39 | 0.00 |
| Channel X - Input | -20003.50 | 2.72 | -0.01 |
| Channel Y + Input | 200030.06 | -2.90 | -0.00 |
| Channel Y + Input | 20004.14 | -0.70 | -0.00 |
| Channel Y - Input | -20008.00 | -1.63 | 0.01 |
| Channel Z + Input | 200034.52 | 1.89 | 0.00 |
| Channel Z + Input | 20005.02 | 0.16 | 0.00 |
| Channel Z - Input | -20007.28 | -0.87 | 0.00 |

| Low Range | Reading (μV) | Difference (μV) | Error (%) |
|-------------------|---------------------------|------------------------------|-----------|
| Channel X + Input | 2000.94 | 0.03 | 0.00 |
| Channel X + Input | 200.94 | 0.01 | 0.01 |
| Channel X - Input | -198.93 | 0.16 | -0.08 |
| Channel Y + Input | 2000.58 | -0.17 | -0.01 |
| Channel Y + Input | 199.97 | -0.81 | -0.40 |
| Channel Y - Input | -200.24 | -0.99 | 0.50 |
| Channel Z + Input | 2000.83 | 0.21 | 0.01 |
| Channel Z + Input | 199.97 | -0.67 | -0.34 |
| Channel Z - Input | -199.90 | -0.63 | 0.32 |

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| | Common mode Input Voltage (mV) | High Range Average Reading (μV) | Low Range Average Reading (μV) |
|-----------|--------------------------------|----------------------------------------------|---------------------------------------------|
| Channel X | 200 | 23.26 | 21.16 |
| | - 200 | -21.29 | -22.70 |
| Channel Y | 200 | -27.83 | -28.04 |
| | - 200 | 26.48 | 26.49 |
| Channel Z | 200 | -11.47 | -11.06 |
| | - 200 | 9.80 | 9.70 |

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| | Input Voltage (mV) | Channel X (μV) | Channel Y (μV) | Channel Z (μV) |
|-----------|--------------------|-----------------------------|-----------------------------|-----------------------------|
| Channel X | 200 | - | 1.92 | -3.40 |
| Channel Y | 200 | 8.27 | - | 3.32 |
| Channel Z | 200 | 9.47 | 5.42 | - |

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| | High Range (LSB) | Low Range (LSB) |
|-----------|------------------|-----------------|
| Channel X | 15579 | 16774 |
| Channel Y | 16044 | 14871 |
| Channel Z | 16074 | 16518 |

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10M Ω

| | Average (μ V) | min. Offset (μ V) | max. Offset (μ V) | Std. Deviation (μ V) |
|-----------|--------------------|------------------------|------------------------|---------------------------|
| Channel X | 0.87 | -0.93 | 1.98 | 0.46 |
| Channel Y | -0.62 | -1.71 | 0.15 | 0.38 |
| Channel Z | -0.46 | -1.45 | 0.52 | 0.39 |

6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

7. Input Resistance (Typical values for information)

| | Zeroing (kOhm) | Measuring (MOhm) |
|-----------|----------------|------------------|
| Channel X | 200 | 200 |
| Channel Y | 200 | 200 |
| Channel Z | 200 | 200 |

8. Low Battery Alarm Voltage (Typical values for information)

| Typical values | Alarm Level (VDC) |
|----------------|-------------------|
| Supply (+ Vcc) | +7.9 |
| Supply (- Vcc) | -7.6 |

9. Power Consumption (Typical values for information)

| Typical values | Switched off (mA) | Stand by (mA) | Transmitting (mA) |
|----------------|-------------------|---------------|-------------------|
| Supply (+ Vcc) | +0.01 | +6 | +14 |
| Supply (- Vcc) | -0.01 | -8 | -9 |



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **Sporton**

Certificate No: **EX3-3935_May20**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3935**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-14.v5, QA CAL-23.v5, QA CAL-25.v7
Calibration procedure for dosimetric E-field probes**

Calibration date: **May 27, 2020**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID | Cal Date (Certificate No.) | Scheduled Calibration |
|----------------------------|------------------|-----------------------------------|------------------------|
| Power meter NRP | SN: 104778 | 01-Apr-20 (No. 217-03100/03101) | Apr-21 |
| Power sensor NRP-Z91 | SN: 103244 | 01-Apr-20 (No. 217-03100) | Apr-21 |
| Power sensor NRP-Z91 | SN: 103245 | 01-Apr-20 (No. 217-03101) | Apr-21 |
| Reference 20 dB Attenuator | SN: CC2552 (20x) | 31-Mar-20 (No. 217-03106) | Apr-21 |
| DAE4 | SN: 660 | 27-Dec-19 (No. DAE4-660_Dec19) | Dec-20 |
| Reference Probe ES3DV2 | SN: 3013 | 31-Dec-19 (No. ES3-3013_Dec19) | Dec-20 |
| Secondary Standards | ID | Check Date (in house) | Scheduled Check |
| Power meter E4419B | SN: GB41293874 | 06-Apr-16 (in house check Jun-18) | In house check: Jun-20 |
| Power sensor E4412A | SN: MY41498087 | 06-Apr-16 (in house check Jun-18) | In house check: Jun-20 |
| Power sensor E4412A | SN: 000110210 | 06-Apr-16 (in house check Jun-18) | In house check: Jun-20 |
| RF generator HP 8648C | SN: US3642U01700 | 04-Aug-99 (in house check Jun-18) | In house check: Jun-20 |
| Network Analyzer E8358A | SN: US41080477 | 31-Mar-14 (in house check Oct-19) | In house check: Oct-20 |

| | Name | Function | Signature |
|----------------|---------------|-----------------------|-----------|
| Calibrated by: | Leif Klysner | Laboratory Technician | |
| Approved by: | Katja Pokovic | Technical Manager | |

Issued: June 1, 2020

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Glossary:

| | |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| TSL | tissue simulating liquid |
| NORM _{x,y,z} | sensitivity in free space |
| ConvF | sensitivity in TSL / NORM _{x,y,z} |
| DCP | diode compression point |
| CF | crest factor (1/duty_cycle) of the RF signal |
| A, B, C, D | modulation dependent linearization parameters |
| Polarization φ | φ rotation around probe axis |
| Polarization ϑ | ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis |
| Connector Angle | information used in DASY system to align probe sensor X to the robot coordinate system |

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- *NORM_{x,y,z}*: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). *NORM_{x,y,z}* are only intermediate values, i.e., the uncertainties of *NORM_{x,y,z}* does not affect the E^2 -field uncertainty inside TSL (see below *ConvF*).
- *NORM(f)_{x,y,z}* = *NORM_{x,y,z}* * *frequency_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- *DCP_{x,y,z}*: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- *PAR*: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- *A_{x,y,z}*; *B_{x,y,z}*; *C_{x,y,z}*; *D_{x,y,z}*; *VR_{x,y,z}*: *A, B, C, D* are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. *VR* is the maximum calibration range expressed in RMS voltage across the diode.
- *ConvF and Boundary Effect Parameters*: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to *NORM_{x,y,z}* * *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- *Spherical isotropy (3D deviation from isotropy)*: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- *Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- *Connector Angle*: The angle is assessed using the information gained by determining the *NORM_x* (no uncertainty required).

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3935

Basic Calibration Parameters

| | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|-----------------------------------------------------------|----------|----------|----------|---------------|
| Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A | 0.49 | 0.53 | 0.48 | $\pm 10.1 \%$ |
| DCP (mV) ^B | 102.6 | 103.2 | 102.3 | |

Calibration Results for Modulation Response

| UID | Communication System Name | | A dB | B dB $\sqrt{\mu\text{V}}$ | C | D dB | VR mV | Max dev. | Unc ^E (k=2) |
|-----|---------------------------|---|---------|------------------------------|-----|---------|----------|--------------|---------------------------|
| 0 | CW | X | 0.0 | 0.0 | 1.0 | 0.00 | 137.0 | $\pm 3.3 \%$ | $\pm 4.7 \%$ |
| | | Y | 0.0 | 0.0 | 1.0 | | 150.1 | | |
| | | Z | 0.0 | 0.0 | 1.0 | | 141.6 | | |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E²-field uncertainty inside TSL (see Page 5).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3935

Other Probe Parameters

| | |
|-----------------------------------------------|------------|
| Sensor Arrangement | Triangular |
| Connector Angle (°) | 44.5 |
| Mechanical Surface Detection Mode | enabled |
| Optical Surface Detection Mode | disabled |
| Probe Overall Length | 337 mm |
| Probe Body Diameter | 10 mm |
| Tip Length | 9 mm |
| Tip Diameter | 2.5 mm |
| Probe Tip to Sensor X Calibration Point | 1 mm |
| Probe Tip to Sensor Y Calibration Point | 1 mm |
| Probe Tip to Sensor Z Calibration Point | 1 mm |
| Recommended Measurement Distance from Surface | 1.4 mm |

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3935

Calibration Parameter Determined in Head Tissue Simulating Media


| f (MHz) ^C | Relative Permittivity ^F | Conductivity (S/m) ^F | ConvF X | ConvF Y | ConvF Z | Alpha ^G | Depth (mm) ^G | Unc (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-----------|
| 750 | 41.9 | 0.89 | 10.58 | 10.58 | 10.58 | 0.57 | 0.80 | ± 12.0 % |
| 835 | 41.5 | 0.90 | 10.31 | 10.31 | 10.31 | 0.38 | 0.93 | ± 12.0 % |
| 900 | 41.5 | 0.97 | 10.16 | 10.16 | 10.16 | 0.40 | 0.88 | ± 12.0 % |
| 1750 | 40.1 | 1.37 | 8.60 | 8.60 | 8.60 | 0.27 | 0.86 | ± 12.0 % |
| 1900 | 40.0 | 1.40 | 8.35 | 8.35 | 8.35 | 0.24 | 0.86 | ± 12.0 % |
| 2000 | 40.0 | 1.40 | 8.25 | 8.25 | 8.25 | 0.34 | 0.86 | ± 12.0 % |
| 2300 | 39.5 | 1.67 | 7.86 | 7.86 | 7.86 | 0.35 | 0.90 | ± 12.0 % |
| 2450 | 39.2 | 1.80 | 7.60 | 7.60 | 7.60 | 0.33 | 0.90 | ± 12.0 % |
| 2600 | 39.0 | 1.96 | 7.43 | 7.43 | 7.43 | 0.37 | 0.90 | ± 12.0 % |
| 5250 | 35.9 | 4.71 | 5.04 | 5.04 | 5.04 | 0.40 | 1.80 | ± 14.0 % |
| 5600 | 35.5 | 5.07 | 4.76 | 4.76 | 4.76 | 0.40 | 1.80 | ± 14.0 % |
| 5750 | 35.4 | 5.22 | 4.67 | 4.67 | 4.67 | 0.40 | 1.80 | ± 14.0 % |

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4-9 MHz, and ConvF assessed at 13 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies up to 6 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.


Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

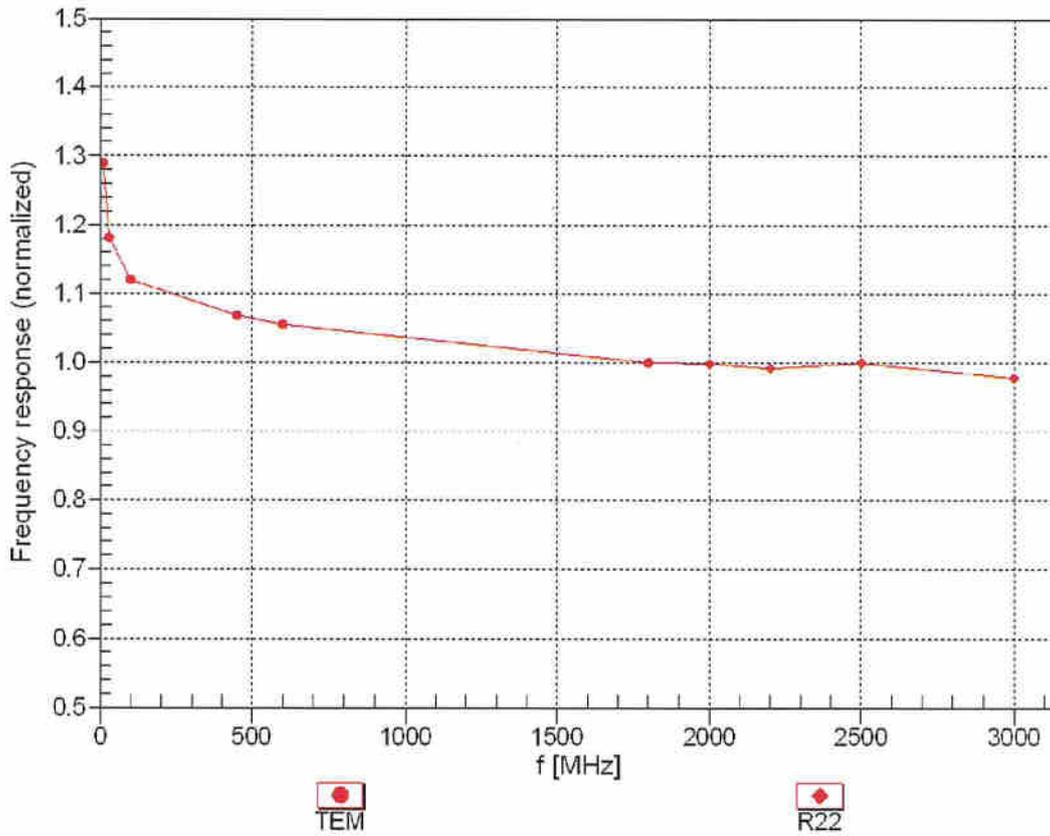



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

f=600 MHz,TEM


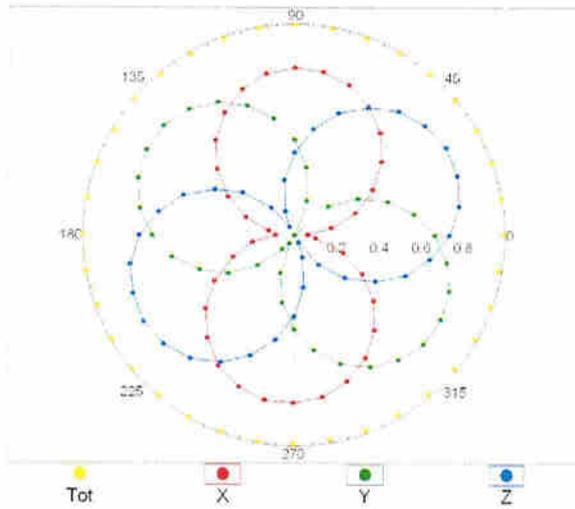


f=1800 MHz,R22

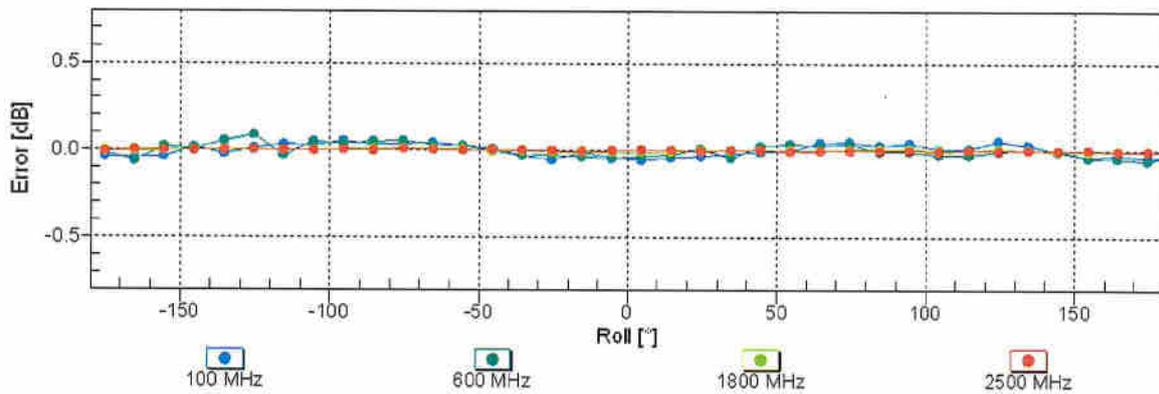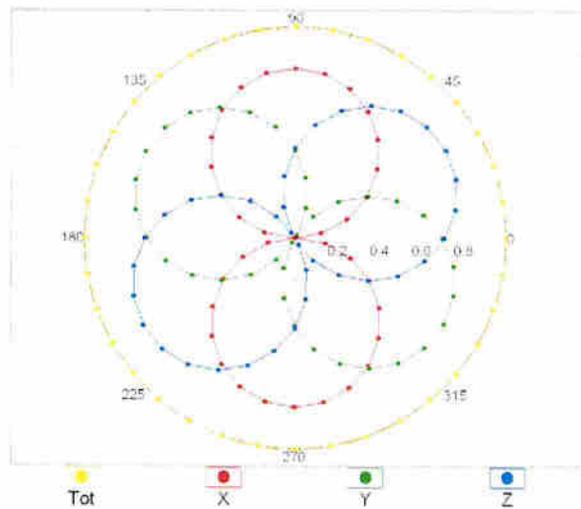


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range f(SAR_{head}) (TEM cell , f_{eval}= 1900 MHz)

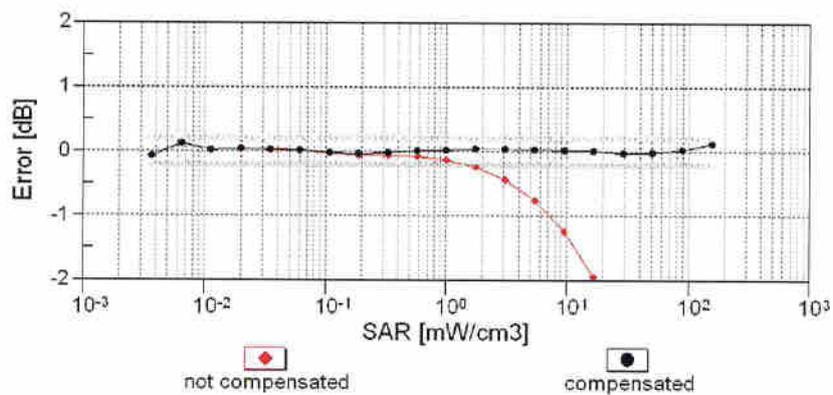
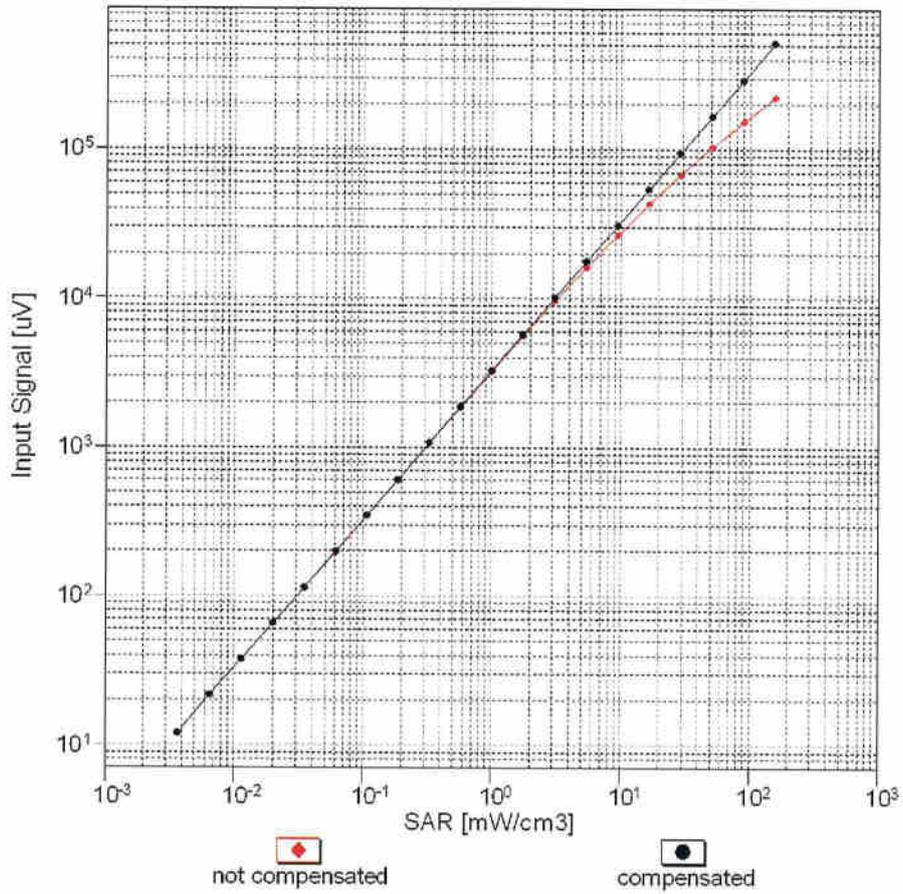


Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Conversion Factor Assessment

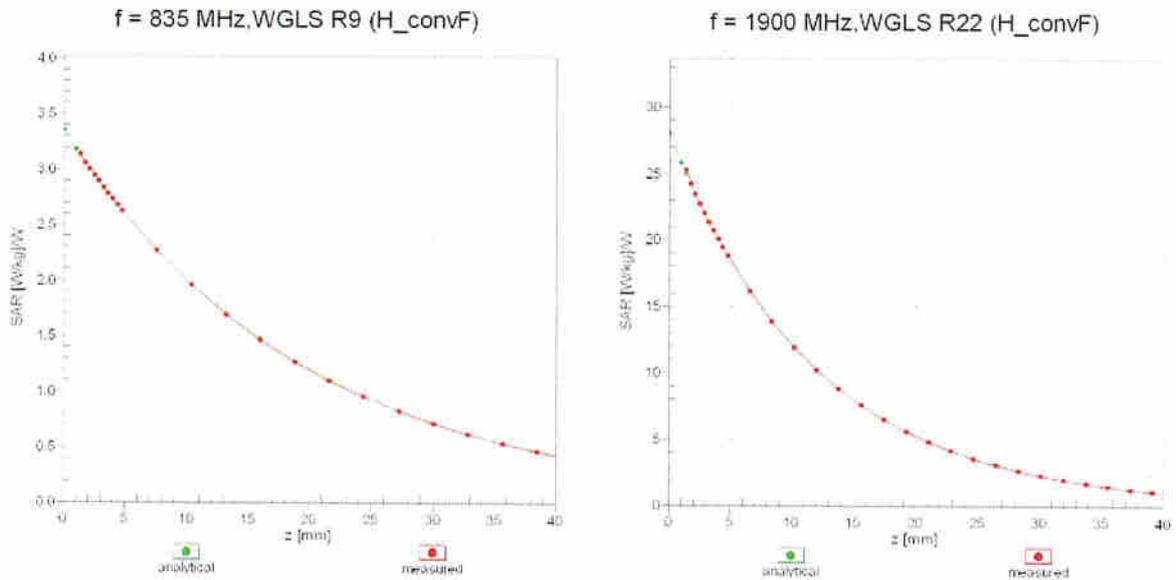

Deviation from Isotropy in Liquid Error (ϕ, ϑ), f = 900 MHz

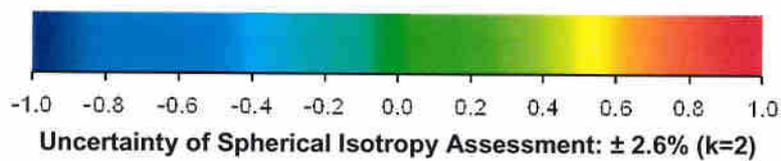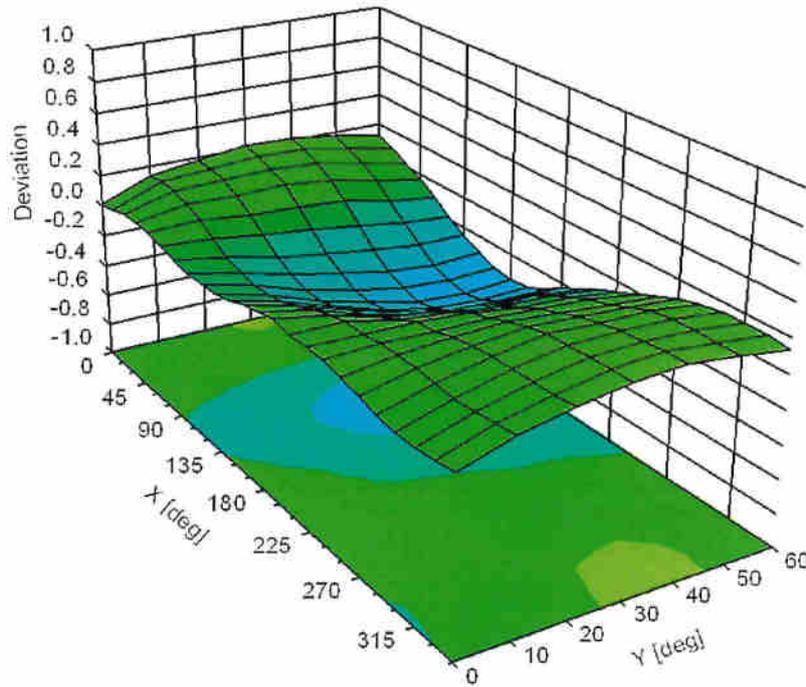



Appendix E. Conducted RF Output Power Table

The detailed power table are shown as follows.



Full Power

| GSM850 | Burst Average Power (dBm) | | | Tune-up Limit (dBm) | Frame-Average Power (dBm) | | | Tune-up Limit (dBm) |
|-----------------|---------------------------|-------|-------|---------------------------|---------------------------|-------|-------|---------------------------|
| | 152 | 169 | 251 | | 152 | 169 | 251 | |
| TX Channel | 524.2 | 532.4 | 848.8 | | 524.2 | 532.4 | 848.8 | |
| Frequency (MHz) | | | | | | | | |
| GSM 1 Tx slot | 31.85 | 31.96 | 32.03 | 33.50 | 22.85 | 22.98 | 23.03 | 24.50 |
| GPRS 1 Tx slot | 31.83 | 31.96 | 32.01 | 33.50 | 22.83 | 22.96 | 23.01 | 24.50 |
| GPRS 2 Tx slots | 28.66 | 29.11 | 29.10 | 30.50 | 22.86 | 23.11 | 23.10 | 24.50 |
| GPRS 3 Tx slots | 26.79 | 26.94 | 27.01 | 28.50 | 22.53 | 22.68 | 22.75 | 24.24 |
| GPRS 4 Tx slots | 25.42 | 25.11 | 25.26 | 26.50 | 22.42 | 22.11 | 22.26 | 23.50 |
| EDGE 1 Tx slot | 25.38 | 25.42 | 25.53 | 27.00 | 18.38 | 18.42 | 18.53 | 18.00 |
| EDGE 2 Tx slots | 25.25 | 25.27 | 25.40 | 26.50 | 19.25 | 19.27 | 19.40 | 20.50 |
| EDGE 3 Tx slots | 23.88 | 23.85 | 23.89 | 25.50 | 19.62 | 19.59 | 19.63 | 21.24 |
| EDGE 4 Tx slots | 22.37 | 22.48 | 22.45 | 24.00 | 19.37 | 19.48 | 19.45 | 21.00 |

| GSM1900 | Burst Average Power (dBm) | | | Tune-up Limit (dBm) | Frame-Average Power (dBm) | | | Tune-up Limit (dBm) |
|-----------------|---------------------------|-------|--------|---------------------------|---------------------------|-------|--------|---------------------------|
| | 512 | 661 | 810 | | 512 | 661 | 810 | |
| TX Channel | 1850.2 | 1880 | 1909.8 | | 1850.2 | 1880 | 1909.8 | |
| Frequency (MHz) | | | | | | | | |
| GSM 1 Tx slot | 28.25 | 28.26 | 29.10 | 30.50 | 20.25 | 20.28 | 20.10 | 21.50 |
| GPRS 1 Tx slot | 28.24 | 28.26 | 29.09 | 30.50 | 20.24 | 20.26 | 20.09 | 21.50 |
| GPRS 2 Tx slots | 26.34 | 26.35 | 26.25 | 27.50 | 20.34 | 20.35 | 20.25 | 21.50 |
| GPRS 3 Tx slots | 24.36 | 24.34 | 24.14 | 25.50 | 20.10 | 20.08 | 19.88 | 21.24 |
| GPRS 4 Tx slots | 22.87 | 22.87 | 22.74 | 24.00 | 19.87 | 19.87 | 19.74 | 21.00 |
| EDGE 1 Tx slot | 25.12 | 25.01 | 24.92 | 28.00 | 16.12 | 16.01 | 15.92 | 17.00 |
| EDGE 2 Tx slots | 25.01 | 24.91 | 24.81 | 28.00 | 19.01 | 18.91 | 18.81 | 20.00 |
| EDGE 3 Tx slots | 23.11 | 23.11 | 22.97 | 24.00 | 18.85 | 18.85 | 18.71 | 19.74 |
| EDGE 4 Tx slots | 21.72 | 21.68 | 21.56 | 23.00 | 18.72 | 18.68 | 18.56 | 20.00 |



| Band | | WCDMA II | | | Tune-up Limit (dBm) | WCDMA IV | | | Tune-up Limit (dBm) | WCDMA V | | | Tune-up Limit (dBm) |
|-----------------|--------------------|----------|-------|--------|---------------------|----------|--------|-------|---------------------|---------|-------|-------|---------------------|
| TX Channel | Rx Channel | 9502 | 9500 | 9538 | | 1512 | 1513 | 1513 | | 4192 | 4192 | 4233 | |
| Frequency (MHz) | | 1852.4 | 1860 | 1907.6 | 1537 | 1639 | 1738 | 4357 | 4407 | 4459 | | | |
| | | 1852.4 | 1860 | 1907.6 | 1712.4 | 1732.6 | 1752.6 | 426.4 | 436.4 | 446.6 | | | |
| 3GPP Rel 99 | AMR 12.2kops | 22.95 | 23.03 | 22.84 | 24.00 | 23.14 | 23.21 | 23.08 | 24.00 | 23.20 | 23.28 | 23.11 | 24.00 |
| 3GPP Rel 99 | RMC 12.2kops | 22.96 | 23.05 | 22.86 | 24.00 | 23.16 | 23.23 | 23.10 | 24.00 | 23.23 | 23.29 | 23.14 | 24.00 |
| 3GPP Rel 6 | HSDPA Subtest-1 | 21.69 | 21.49 | 21.57 | 23.00 | 22.20 | 22.04 | 22.07 | 23.00 | 22.24 | 21.96 | 22.25 | 23.00 |
| 3GPP Rel 6 | HSDPA Subtest-2 | 21.66 | 21.81 | 21.51 | 23.00 | 22.13 | 22.07 | 22.08 | 23.00 | 22.23 | 21.98 | 22.22 | 23.00 |
| 3GPP Rel 6 | HSDPA Subtest-3 | 21.12 | 21.00 | 21.04 | 22.50 | 21.65 | 21.59 | 21.60 | 22.50 | 21.73 | 21.50 | 21.74 | 22.50 |
| 3GPP Rel 6 | HSDPA Subtest-4 | 21.12 | 21.25 | 21.05 | 22.50 | 21.66 | 21.60 | 21.58 | 22.50 | 21.71 | 21.43 | 21.71 | 22.50 |
| 3GPP Rel 6 | DC-HSDPA Subtest-1 | 21.66 | 21.59 | 21.56 | 23.00 | 22.18 | 22.03 | 22.04 | 23.00 | 22.23 | 21.93 | 22.23 | 23.00 |
| 3GPP Rel 8 | DC-HSDPA Subtest-2 | 21.63 | 21.79 | 21.50 | 23.00 | 22.11 | 22.06 | 22.05 | 23.00 | 22.22 | 21.95 | 22.20 | 23.00 |
| 3GPP Rel 8 | DC-HSDPA Subtest-3 | 21.69 | 21.25 | 21.03 | 22.50 | 21.63 | 21.58 | 21.57 | 22.50 | 21.72 | 21.47 | 21.72 | 22.50 |
| 3GPP Rel 8 | DC-HSDPA Subtest-4 | 21.69 | 21.23 | 21.04 | 22.50 | 21.64 | 21.59 | 21.55 | 22.50 | 21.70 | 21.46 | 21.69 | 22.50 |
| 3GPP Rel 6 | HSUPA Subtest-1 | 21.79 | 21.65 | 21.66 | 23.00 | 22.28 | 22.27 | 22.08 | 23.00 | 22.23 | 22.05 | 22.30 | 23.00 |
| 3GPP Rel 6 | HSUPA Subtest-2 | 19.81 | 19.68 | 19.77 | 21.00 | 20.26 | 20.15 | 20.22 | 21.00 | 20.30 | 20.08 | 20.27 | 21.00 |
| 3GPP Rel 6 | HSUPA Subtest-3 | 20.80 | 20.66 | 20.75 | 22.00 | 21.06 | 21.03 | 20.96 | 22.00 | 21.19 | 21.11 | 21.22 | 22.00 |
| 3GPP Rel 6 | HSUPA Subtest-4 | 19.80 | 19.68 | 19.73 | 21.00 | 20.17 | 20.04 | 20.04 | 21.00 | 20.19 | 20.12 | 20.28 | 21.00 |
| 3GPP Rel 6 | HSUPA Subtest-5 | 21.79 | 21.72 | 21.83 | 23.00 | 22.28 | 22.17 | 22.15 | 23.00 | 22.09 | 22.18 | 22.16 | 23.00 |



LTE Band 2

| BSF (MHz) | Modulation | RB Size | RB Offset | Power Low Ch. (Freq.) | Power High Ch. (Freq.) | Power High Ch. (Power) | Turn-up time (min) | MPE (dB) |
|-----------------|------------|---------|-----------|-----------------------|------------------------|------------------------|--------------------|----------|
| Channel | | | | | | | | |
| 20 | QPSK | 1 | 0 | 25.21 | 25.22 | 25.22 | 24 | 0 |
| 20 | QPSK | 1 | 40 | 25.08 | 25.10 | 25.22 | 24 | 0 |
| 20 | QPSK | 1 | 80 | 25.12 | 25.12 | 25.21 | 24 | 0 |
| 20 | QPSK | 3 | 0 | 25.01 | 25.04 | 25.12 | 23 | 1 |
| 20 | QPSK | 3 | 40 | 25.32 | 25.29 | 25.95 | 23 | 1 |
| 20 | QPSK | 3 | 80 | 25.04 | 25.07 | 25.02 | 23 | 1 |
| 20 | QPSK | 3 | 120 | 25.32 | 25.36 | 25.29 | 23 | 1 |
| 20 | QPSK | 1 | 0 | 25.32 | 25.39 | 25.51 | 23 | 1 |
| 20 | QPSK | 1 | 40 | 25.24 | 25.19 | 25.23 | 23 | 1 |
| 20 | QPSK | 1 | 80 | 25.01 | 25.04 | 25.12 | 23 | 1 |
| 20 | QPSK | 50 | 24 | 21.38 | 21.38 | 21.24 | 22 | 2 |
| 20 | QPSK | 50 | 50 | 21.22 | 21.26 | 21.41 | 22 | 2 |
| 20 | QPSK | 150 | 0 | 21.09 | 21.24 | 21.36 | 22 | 2 |
| 20 | QPSK | 150 | 40 | 21.37 | 21.27 | 21.49 | 22 | 2 |
| 20 | QPSK | 1 | 0 | 21.32 | 21.68 | 21.37 | 22 | 2 |
| 20 | QPSK | 1 | 40 | 21.19 | 21.26 | 21.45 | 22 | 2 |
| 20 | QPSK | 1 | 80 | 21.01 | 21.01 | 21.01 | 22 | 2 |
| 20 | QPSK | 50 | 24 | 20.03 | 19.82 | 19.77 | 21 | 3 |
| 20 | QPSK | 50 | 50 | 19.74 | 19.83 | 19.94 | 21 | 3 |
| 20 | QPSK | 150 | 0 | 19.84 | 19.88 | 19.86 | 21 | 3 |
| Channel | | | | | | | | |
| Frequency (MHz) | | | | | | | | |
| 15 | QPSK | 1 | 0 | 21.14 | 21.21 | 21.26 | 24 | 0 |
| 15 | QPSK | 1 | 37 | 21.24 | 21.22 | 21.19 | 24 | 0 |
| 15 | QPSK | 1 | 74 | 21.21 | 21.21 | 21.21 | 24 | 0 |
| 15 | QPSK | 36 | 0 | 20.19 | 20.11 | 20.95 | 23 | 1 |
| 15 | QPSK | 36 | 36 | 21.99 | 22.05 | 22.08 | 23 | 1 |
| 15 | QPSK | 36 | 72 | 21.86 | 21.89 | 21.92 | 23 | 1 |
| 15 | QPSK | 75 | 0 | 22.16 | 22.05 | 22.03 | 23 | 1 |
| 15 | QPSK | 1 | 0 | 22.51 | 22.24 | 22.56 | 23 | 1 |
| 15 | QPSK | 1 | 37 | 22.26 | 22.4 | 22.12 | 23 | 1 |
| 15 | QPSK | 1 | 74 | 22.42 | 22.16 | 22.16 | 23 | 1 |
| 15 | QPSK | 36 | 0 | 21.21 | 21.43 | 21.28 | 22 | 2 |
| 15 | QPSK | 36 | 36 | 21.46 | 21.35 | 21.28 | 22 | 2 |
| 15 | QPSK | 36 | 72 | 21.46 | 21.49 | 21.36 | 22 | 2 |
| 15 | QPSK | 75 | 0 | 21.97 | 21.28 | 21.33 | 22 | 2 |
| 15 | QPSK | 1 | 0 | 21.35 | 21.39 | 21.45 | 22 | 2 |
| 15 | QPSK | 1 | 37 | 21.28 | 21.15 | 21.26 | 22 | 2 |
| 15 | QPSK | 1 | 74 | 21.48 | 21.38 | 21.28 | 22 | 2 |
| 15 | QPSK | 36 | 0 | 19.78 | 19.81 | 19.74 | 21 | 3 |
| 15 | QPSK | 36 | 36 | 19.84 | 19.80 | 19.86 | 21 | 3 |
| 15 | QPSK | 36 | 72 | 19.77 | 19.81 | 19.85 | 21 | 3 |
| 15 | QPSK | 75 | 0 | 19.82 | 19.83 | 19.75 | 21 | 3 |
| Channel | | | | | | | | |
| Frequency (MHz) | | | | | | | | |
| 10 | QPSK | 1 | 0 | 21.01 | 21.01 | 21.01 | 24 | 0 |
| 10 | QPSK | 1 | 35 | 21.17 | 21.15 | 21.24 | 24 | 0 |
| 10 | QPSK | 1 | 70 | 21.15 | 21.15 | 21.21 | 24 | 0 |
| 10 | QPSK | 25 | 0 | 20.28 | 20.20 | 20.30 | 23 | 1 |
| 10 | QPSK | 25 | 25 | 20.58 | 20.58 | 20.16 | 23 | 1 |
| 10 | QPSK | 50 | 0 | 20.33 | 20.22 | 20.10 | 23 | 1 |
| 10 | QPSK | 1 | 0 | 20.81 | 20.79 | 20.79 | 23 | 1 |
| 10 | QPSK | 1 | 40 | 20.33 | 20.38 | 20.47 | 23 | 1 |
| 10 | QPSK | 25 | 0 | 21.56 | 21.42 | 21.29 | 22 | 2 |
| 10 | QPSK | 25 | 25 | 21.46 | 21.46 | 21.32 | 22 | 2 |
| 10 | QPSK | 25 | 50 | 21.25 | 21.48 | 21.24 | 22 | 2 |
| 10 | QPSK | 50 | 0 | 21.32 | 21.42 | 21.34 | 22 | 2 |
| 10 | QPSK | 1 | 0 | 21.32 | 21.36 | 21.24 | 22 | 2 |
| 10 | QPSK | 1 | 40 | 21.02 | 21.11 | 21.11 | 22 | 2 |
| 10 | QPSK | 1 | 80 | 21.01 | 21.32 | 21.18 | 22 | 2 |
| 10 | QPSK | 25 | 0 | 19.82 | 19.74 | 19.79 | 21 | 3 |
| 10 | QPSK | 25 | 25 | 19.86 | 19.75 | 19.74 | 21 | 3 |
| 10 | QPSK | 25 | 50 | 19.85 | 19.87 | 19.72 | 21 | 3 |
| 10 | QPSK | 50 | 0 | 19.49 | 19.48 | 19.81 | 21 | 3 |
| Channel | | | | | | | | |
| Frequency (MHz) | | | | | | | | |
| 5 | QPSK | 1 | 0 | 21.21 | 21.23 | 21.16 | 24 | 0 |
| 5 | QPSK | 1 | 12 | 21.13 | 21.19 | 21.01 | 24 | 0 |
| 5 | QPSK | 1 | 24 | 21.06 | 21.17 | 21.06 | 24 | 0 |
| 5 | QPSK | 12 | 0 | 20.85 | 20.71 | 20.81 | 23 | 1 |
| 5 | QPSK | 12 | 12 | 20.34 | 20.23 | 20.14 | 23 | 1 |
| 5 | QPSK | 12 | 24 | 20.12 | 20.15 | 20.12 | 23 | 1 |
| 5 | QPSK | 25 | 0 | 20.86 | 20.76 | 20.18 | 23 | 1 |
| 5 | QPSK | 25 | 12 | 20.43 | 20.25 | 20.11 | 23 | 1 |
| 5 | QPSK | 25 | 24 | 20.24 | 20.10 | 20.03 | 23 | 1 |
| 5 | QPSK | 50 | 0 | 20.24 | 20.10 | 20.03 | 23 | 1 |
| 5 | QPSK | 1 | 0 | 21.45 | 21.53 | 21.32 | 22 | 2 |
| 5 | QPSK | 1 | 12 | 21.32 | 21.48 | 21.29 | 22 | 2 |
| 5 | QPSK | 25 | 0 | 21.50 | 21.46 | 21.65 | 22 | 2 |
| 5 | QPSK | 1 | 0 | 21.08 | 21.49 | 21.65 | 22 | 2 |
| 5 | QPSK | 1 | 12 | 21.24 | 21.18 | 21.17 | 22 | 2 |
| 5 | QPSK | 1 | 24 | 21.21 | 21.17 | 21.47 | 22 | 2 |
| 5 | QPSK | 12 | 0 | 21.06 | 21.05 | 21.23 | 21 | 3 |
| 5 | QPSK | 12 | 12 | 19.84 | 19.80 | 19.74 | 21 | 3 |
| 5 | QPSK | 12 | 24 | 19.86 | 19.79 | 19.71 | 21 | 3 |
| 5 | QPSK | 25 | 0 | 19.87 | 19.87 | 19.70 | 21 | 3 |
| Channel | | | | | | | | |
| Frequency (MHz) | | | | | | | | |
| 3 | QPSK | 1 | 0 | 21.15 | 21.02 | 21.21 | 24 | 0 |
| 3 | QPSK | 1 | 8 | 21.24 | 21.16 | 21.06 | 24 | 0 |
| 3 | QPSK | 8 | 0 | 20.30 | 20.13 | 20.06 | 23 | 1 |
| 3 | QPSK | 8 | 8 | 20.22 | 20.02 | 20.04 | 23 | 1 |
| 3 | QPSK | 15 | 0 | 20.18 | 20.11 | 20.04 | 23 | 1 |
| 3 | QPSK | 15 | 0 | 20.24 | 20.26 | 20.11 | 23 | 1 |
| 3 | QPSK | 1 | 0 | 20.18 | 20.12 | 20.16 | 23 | 1 |
| 3 | QPSK | 1 | 8 | 20.10 | 20.09 | 20.12 | 23 | 1 |
| 3 | QPSK | 8 | 0 | 21.48 | 21.38 | 21.35 | 22 | 2 |
| 3 | QPSK | 8 | 8 | 21.49 | 21.50 | 21.31 | 22 | 2 |
| 3 | QPSK | 8 | 16 | 21.07 | 21.45 | 21.36 | 22 | 2 |
| 3 | QPSK | 15 | 0 | 21.41 | 21.27 | 21.28 | 22 | 2 |
| 3 | QPSK | 1 | 0 | 21.29 | 21.20 | 21.06 | 22 | 2 |
| 3 | QPSK | 1 | 8 | 21.18 | 21.15 | 21.11 | 22 | 2 |
| 3 | QPSK | 8 | 0 | 19.77 | 19.72 | 19.72 | 21 | 3 |
| 3 | QPSK | 8 | 8 | 19.79 | 19.80 | 19.72 | 21 | 3 |
| 3 | QPSK | 8 | 16 | 19.86 | 19.78 | 19.80 | 21 | 3 |
| 3 | QPSK | 15 | 0 | 19.88 | 19.75 | 19.85 | 21 | 3 |
| Channel | | | | | | | | |
| Frequency (MHz) | | | | | | | | |
| 1.4 | QPSK | 1 | 0 | 21.28 | 21.10 | 21.10 | 24 | 0 |
| 1.4 | QPSK | 1 | 5 | 21.19 | 21.20 | 21.13 | 24 | 0 |
| 1.4 | QPSK | 3 | 0 | 20.19 | 20.20 | 20.11 | 23 | 1 |
| 1.4 | QPSK | 3 | 3 | 20.21 | 20.23 | 20.15 | 23 | 1 |
| 1.4 | QPSK | 6 | 0 | 20.28 | 20.29 | 20.14 | 23 | 1 |
| 1.4 | QPSK | 1 | 0 | 20.46 | 20.46 | 20.20 | 23 | 1 |
| 1.4 | QPSK | 1 | 5 | 20.61 | 20.58 | 20.68 | 23 | 1 |
| 1.4 | QPSK | 3 | 0 | 20.36 | 20.15 | 20.19 | 22 | 2 |
| 1.4 | QPSK | 3 | 3 | 20.36 | 20.15 | 20.19 | 22 | 2 |
| 1.4 | QPSK | 6 | 0 | 21.45 | 21.30 | 21.22 | 22 | 2 |
| 1.4 | QPSK | 1 | 0 | 21.21 | 21.09 | 21.12 | 22 | 2 |
| 1.4 | QPSK | 1 | 5 | 21.28 | 21.20 | 21.13 | 22 | 2 |
| 1.4 | QPSK | 3 | 0 | 21.18 | 21.07 | 21.05 | 22 | 2 |
| 1.4 | QPSK | 3 | 3 | 21.23 | 21.16 | 21.10 | 22 | 2 |
| 1.4 | QPSK | 6 | 0 | 19.84 | 19.74 | 19.71 | 21 | 3 |

LTE Band 4

| BSF (MHz) | Modulation | RB Size | RB Offset | Power Low Ch. (Freq.) | Power High Ch. (Freq.) | Power High Ch. (Power) | Turn-up time (min) | MPE (dB) |
|-----------------|------------|---------|-----------|-----------------------|------------------------|------------------------|--------------------|----------|
| Channel | | | | | | | | |
| 20 | QPSK | 1 | 0 | 22.04 | 22.12 | 22.48 | 24 | 0 |
| 20 | QPSK | 1 | 40 | 22.06 | 22.00 | 22.07 | 24 | 0 |
| 20 | QPSK | 1 | 80 | 22.23 | 22.24 | 22.22 | 24 | 0 |
| 20 | QPSK | 3 | 0 | 22.01 | 22.06 | 22.21 | 23 | 1 |
| 20 | QPSK | 3 | 40 | 22.15 | 22.14 | 22.21 | 23 | 1 |
| 20 | QPSK | 3 | 80 | 22.07 | 22.10 | 22.10 | 23 | 1 |
| 20 | QPSK | 3 | 120 | 22.01 | 22.05 | 22.05 | 23 | 1 |
| 20 | QPSK | 1 | 0 | 22.06 | 22.04 | 22.04 | 23 | 1 |
| 20 | QPSK | 1 | 40 | 22.48 | 22.44 | 22.58 | 23 | 1 |
| 20 | QPSK | 1 | 80 | 22.03 | 22.04 | 22.05 | 23 | 1 |
| 20 | QPSK | 50 | 24 | 21.19 | 21.15 | 21.18 | 22 | 2 |
| 20 | QPSK | 50 | 50 | 21.10 | 21.17 | 21.15 | 22 | 2 |
| 20 | QPSK | 150 | 0 | 21.08 | 21.16 | 21.24 | 22 | 2 |
| 20 | QPSK | 150 | 40 | 21.47 | 21.54 | 21.48 | 22 | 2 |
| 20 | QPSK | 1 | 0 | 21.46 | 21.41 | 21.40 | 22 | 2 |
| 20 | QPSK | 1 | 40 | 21.59 | 21.48 | 21.69 | 22 | 2 |
| 20 | QPSK | 1 | 80 | 20.12 | 20.19 | 20.12 | 21 | 3 |
| 20 | QPSK | 50 | 24 | 20.16 | 20.09 | 20.21 | 21 | 3 |
| 20 | QPSK | 50 | 50 | 20.12 | 20.19 | 20.12 | 21 | 3 |
| 20 | QPSK | 150 | 0 | 20.13 | 20.06 | 20.14 | 21 | 3 |
| Channel | | | | | | | | |
| Frequency (MHz) | | | | | | | | |
| 15 | QPSK | 1 | 0 | 22.06 | 22.04 | 22.02 | 24 | 0 |
| 15 | QPSK | 1 | 37 | 22.03 | 22.04 | 22.04 | 24 | 0 |
| 15 | | | | | | | | |



| LTE Band 12 | | | | | | | | | |
|-----------------|------------|---------|-----------|----------------------|-----------------------|----------------------|----------------------|----------|--|
| BW (MHz) | Modulation | RB Size | RB Offset | Power Line Ch. Freq. | Power Noise Ch. Freq. | Power Pkg. Ch. Freq. | Frequency Band (MHz) | MPE (dB) | |
| Channel | | | | | | | | | |
| Frequency (MHz) | | | | 23050 | 23050 | 23130 | | | |
| 10 | QPSK | 1 | 0 | 23130 | 23130 | 23130 | | | |
| 10 | QPSK | 1 | 24 | 23050 | 23050 | 23050 | 24 | 0 | |
| 10 | QPSK | 1 | 48 | 23130 | 23130 | 23130 | | | |
| 10 | QPSK | 25 | 0 | 23130 | 23130 | 23130 | | | |
| 10 | QPSK | 25 | 12 | 23050 | 23050 | 23050 | | | |
| 10 | QPSK | 25 | 24 | 23050 | 23050 | 23050 | 23 | 1 | |
| 10 | QPSK | 25 | 0 | 23050 | 23050 | 23050 | | | |
| 10 | 16QAM | 1 | 0 | 23050 | 23050 | 23050 | | | |
| 10 | 16QAM | 1 | 24 | 23050 | 23050 | 23050 | 23 | 1 | |
| 10 | 16QAM | 1 | 48 | 23050 | 23050 | 23050 | | | |
| 10 | 16QAM | 25 | 0 | 23050 | 23050 | 23050 | | | |
| 10 | 16QAM | 25 | 12 | 23130 | 23130 | 23130 | | | |
| 10 | 16QAM | 25 | 24 | 23130 | 23130 | 23130 | 22 | 2 | |
| 10 | 16QAM | 25 | 0 | 23130 | 23130 | 23130 | | | |
| 10 | 64QAM | 1 | 0 | 23130 | 23130 | 23130 | | | |
| 10 | 64QAM | 1 | 24 | 23130 | 23130 | 23130 | 22 | 2 | |
| 10 | 64QAM | 1 | 48 | 23130 | 23130 | 23130 | | | |
| 10 | 64QAM | 25 | 0 | 23050 | 23050 | 23050 | | | |
| 10 | 64QAM | 25 | 12 | 23130 | 23130 | 23130 | | | |
| 10 | 64QAM | 25 | 24 | 23130 | 23130 | 23130 | 21 | 3 | |
| 10 | 64QAM | 25 | 0 | 23050 | 23050 | 23050 | | | |
| Channel | | | | | | | | | |
| Frequency (MHz) | | | | 701.5 | 701.5 | 713.5 | Frequency Band (MHz) | MPE (dB) | |
| 5 | QPSK | 1 | 0 | 701.5 | 701.5 | 701.5 | | | |
| 5 | QPSK | 1 | 12 | 701.5 | 701.5 | 701.5 | 24 | 0 | |
| 5 | QPSK | 1 | 24 | 701.5 | 701.5 | 701.5 | | | |
| 5 | QPSK | 12 | 0 | 701.5 | 701.5 | 701.5 | | | |
| 5 | QPSK | 12 | 7 | 701.5 | 701.5 | 701.5 | 23 | 1 | |
| 5 | QPSK | 12 | 14 | 701.5 | 701.5 | 701.5 | | | |
| 5 | QPSK | 25 | 0 | 701.5 | 701.5 | 701.5 | | | |
| 5 | 16QAM | 1 | 0 | 701.5 | 701.5 | 701.5 | | | |
| 5 | 16QAM | 1 | 12 | 701.5 | 701.5 | 701.5 | 23 | 1 | |
| 5 | 16QAM | 1 | 24 | 701.5 | 701.5 | 701.5 | | | |
| 5 | 16QAM | 12 | 0 | 701.5 | 701.5 | 701.5 | | | |
| 5 | 16QAM | 12 | 7 | 701.5 | 701.5 | 701.5 | 22 | 2 | |
| 5 | 16QAM | 12 | 14 | 701.5 | 701.5 | 701.5 | | | |
| 5 | 16QAM | 25 | 0 | 701.5 | 701.5 | 701.5 | | | |
| 5 | 64QAM | 1 | 0 | 701.5 | 701.5 | 701.5 | | | |
| 5 | 64QAM | 1 | 12 | 701.5 | 701.5 | 701.5 | 22 | 2 | |
| 5 | 64QAM | 1 | 24 | 701.5 | 701.5 | 701.5 | | | |
| 5 | 64QAM | 12 | 0 | 701.5 | 701.5 | 701.5 | | | |
| 5 | 64QAM | 12 | 7 | 701.5 | 701.5 | 701.5 | 21 | 3 | |
| 5 | 64QAM | 12 | 14 | 701.5 | 701.5 | 701.5 | | | |
| 5 | 64QAM | 25 | 0 | 701.5 | 701.5 | 701.5 | | | |
| Channel | | | | | | | | | |
| Frequency (MHz) | | | | 736.5 | 736.5 | 748.5 | Frequency Band (MHz) | MPE (dB) | |
| 3 | QPSK | 1 | 0 | 736.5 | 736.5 | 736.5 | | | |
| 3 | QPSK | 1 | 6 | 736.5 | 736.5 | 736.5 | 24 | 0 | |
| 3 | QPSK | 1 | 14 | 736.5 | 736.5 | 736.5 | | | |
| 3 | QPSK | 8 | 0 | 736.5 | 736.5 | 736.5 | | | |
| 3 | QPSK | 8 | 4 | 736.5 | 736.5 | 736.5 | 23 | 1 | |
| 3 | QPSK | 8 | 7 | 736.5 | 736.5 | 736.5 | | | |
| 3 | QPSK | 15 | 0 | 736.5 | 736.5 | 736.5 | | | |
| 3 | 16QAM | 1 | 0 | 736.5 | 736.5 | 736.5 | | | |
| 3 | 16QAM | 1 | 6 | 736.5 | 736.5 | 736.5 | 23 | 1 | |
| 3 | 16QAM | 1 | 14 | 736.5 | 736.5 | 736.5 | | | |
| 3 | 16QAM | 8 | 0 | 736.5 | 736.5 | 736.5 | | | |
| 3 | 16QAM | 8 | 4 | 736.5 | 736.5 | 736.5 | 22 | 2 | |
| 3 | 16QAM | 8 | 7 | 736.5 | 736.5 | 736.5 | | | |
| 3 | 16QAM | 15 | 0 | 736.5 | 736.5 | 736.5 | | | |
| 3 | 64QAM | 1 | 0 | 736.5 | 736.5 | 736.5 | | | |
| 3 | 64QAM | 1 | 6 | 736.5 | 736.5 | 736.5 | 22 | 2 | |
| 3 | 64QAM | 1 | 14 | 736.5 | 736.5 | 736.5 | | | |
| 3 | 64QAM | 8 | 0 | 736.5 | 736.5 | 736.5 | | | |
| 3 | 64QAM | 8 | 4 | 736.5 | 736.5 | 736.5 | 21 | 3 | |
| 3 | 64QAM | 8 | 7 | 736.5 | 736.5 | 736.5 | | | |
| 3 | 64QAM | 15 | 0 | 736.5 | 736.5 | 736.5 | | | |
| Channel | | | | | | | | | |
| Frequency (MHz) | | | | 2307.7 | 2307.7 | 2317.7 | Frequency Band (MHz) | MPE (dB) | |
| 1.4 | QPSK | 1 | 0 | 2307.7 | 2307.7 | 2307.7 | | | |
| 1.4 | QPSK | 1 | 3 | 2307.7 | 2307.7 | 2307.7 | 24 | 0 | |
| 1.4 | QPSK | 1 | 5 | 2307.7 | 2307.7 | 2307.7 | | | |
| 1.4 | QPSK | 3 | 0 | 2307.7 | 2307.7 | 2307.7 | | | |
| 1.4 | QPSK | 3 | 1 | 2307.7 | 2307.7 | 2307.7 | | | |
| 1.4 | QPSK | 3 | 3 | 2307.7 | 2307.7 | 2307.7 | 23 | 1 | |
| 1.4 | QPSK | 3 | 5 | 2307.7 | 2307.7 | 2307.7 | | | |
| 1.4 | 16QAM | 1 | 0 | 2307.7 | 2307.7 | 2307.7 | | | |
| 1.4 | 16QAM | 1 | 3 | 2307.7 | 2307.7 | 2307.7 | 23 | 1 | |
| 1.4 | 16QAM | 1 | 5 | 2307.7 | 2307.7 | 2307.7 | | | |
| 1.4 | 16QAM | 3 | 0 | 2307.7 | 2307.7 | 2307.7 | | | |
| 1.4 | 16QAM | 3 | 1 | 2307.7 | 2307.7 | 2307.7 | | | |
| 1.4 | 16QAM | 3 | 3 | 2307.7 | 2307.7 | 2307.7 | 22 | 2 | |
| 1.4 | 16QAM | 3 | 5 | 2307.7 | 2307.7 | 2307.7 | | | |
| 1.4 | 64QAM | 1 | 0 | 2307.7 | 2307.7 | 2307.7 | | | |
| 1.4 | 64QAM | 1 | 3 | 2307.7 | 2307.7 | 2307.7 | 22 | 2 | |
| 1.4 | 64QAM | 1 | 5 | 2307.7 | 2307.7 | 2307.7 | | | |
| 1.4 | 64QAM | 3 | 0 | 2307.7 | 2307.7 | 2307.7 | | | |
| 1.4 | 64QAM | 3 | 1 | 2307.7 | 2307.7 | 2307.7 | | | |
| 1.4 | 64QAM | 3 | 3 | 2307.7 | 2307.7 | 2307.7 | 21 | 3 | |
| 1.4 | 64QAM | 3 | 5 | 2307.7 | 2307.7 | 2307.7 | | | |

| LTE Band 14 | | | | | | | | | |
|-----------------|------------|---------|-----------|----------------------|-----------------------|----------------------|----------------------|----------|--|
| BW (MHz) | Modulation | RB Size | RB Offset | Power Line Ch. Freq. | Power Noise Ch. Freq. | Power Pkg. Ch. Freq. | Frequency Band (MHz) | MPE (dB) | |
| Channel | | | | | | | | | |
| Frequency (MHz) | | | | 2330 | 2330 | 2330 | | | |
| 10 | QPSK | 1 | 0 | 2330 | 2330 | 2330 | | | |
| 10 | QPSK | 1 | 25 | 2330 | 2330 | 2330 | 24 | 0 | |
| 10 | QPSK | 1 | 49 | 2330 | 2330 | 2330 | | | |
| 10 | QPSK | 25 | 0 | 2330 | 2330 | 2330 | | | |
| 10 | QPSK | 25 | 12 | 2330 | 2330 | 2330 | | | |
| 10 | QPSK | 25 | 24 | 2330 | 2330 | 2330 | 23 | 1 | |
| 10 | QPSK | 25 | 0 | 2330 | 2330 | 2330 | | | |
| 10 | 16QAM | 1 | 0 | 2330 | 2330 | 2330 | | | |
| 10 | 16QAM | 1 | 25 | 2330 | 2330 | 2330 | 23 | 1 | |
| 10 | 16QAM | 1 | 49 | 2330 | 2330 | 2330 | | | |
| 10 | 16QAM | 25 | 0 | 2330 | 2330 | 2330 | | | |
| 10 | 16QAM | 25 | 12 | 2330 | 2330 | 2330 | | | |
| 10 | 16QAM | 25 | 24 | 2330 | 2330 | 2330 | 22 | 2 | |
| 10 | 16QAM | 25 | 0 | 2330 | 2330 | 2330 | | | |
| 10 | 64QAM | 1 | 0 | 2330 | 2330 | 2330 | | | |
| 10 | 64QAM | 1 | 25 | 2330 | 2330 | 2330 | 22 | 2 | |
| 10 | 64QAM | 1 | 49 | 2330 | 2330 | 2330 | | | |
| 10 | 64QAM | 25 | 0 | 2330 | 2330 | 2330 | | | |
| 10 | 64QAM | 25 | 12 | 2330 | 2330 | 2330 | | | |
| 10 | 64QAM | 25 | 24 | 2330 | 2330 | 2330 | 21 | 3 | |
| 10 | 64QAM | 25 | 0 | 2330 | 2330 | 2330 | | | |
| Channel | | | | | | | | | |
| Frequency (MHz) | | | | 2330.5 | 2330.5 | 2330.5 | Frequency Band (MHz) | MPE (dB) | |
| 5 | QPSK | 1 | 0 | 2330.5 | 2330.5 | 2330.5 | | | |
| 5 | QPSK | 1 | 12 | 2330.5 | 2330.5 | 2330.5 | 24 | 0 | |
| 5 | QPSK | 1 | 24 | 2330.5 | 2330.5 | 2330.5 | | | |
| 5 | QPSK | 12 | 0 | 2330.5 | 2330.5 | 2330.5 | | | |
| 5 | QPSK | 12 | 7 | 2330.5 | 2330.5 | 2330.5 | 23 | 1 | |
| 5 | QPSK | 12 | 13 | 2330.5 | 2330.5 | 2330.5 | | | |
| 5 | QPSK | 25 | 0 | 2330.5 | 2330.5 | 2330.5 | | | |
| 5 | 16QAM | 1 | 0 | 2330.5 | 2330.5 | 2330.5 | | | |
| 5 | 16QAM | 1 | 12 | 2330.5 | 2330.5 | 2330.5 | 23 | 1 | |
| 5 | 16QAM | 1 | 24 | 2330.5 | 2330.5 | 2330.5 | | | |
| 5 | 16QAM | 12 | 0 | 2330.5 | 2330.5 | 2330.5 | | | |
| 5 | 16QAM | 12 | 7 | 2330.5 | 2330.5 | 2330.5 | 22 | 2 | |
| 5 | 16QAM | 12 | 13 | 2330.5 | 2330.5 | 2330.5 | | | |
| 5 | 16QAM | 25 | 0 | 2330.5 | 2330.5 | 2330.5 | | | |
| 5 | 64QAM | 1 | 0 | 2330.5 | 2330.5 | 2330.5 | | | |
| 5 | 64QAM | 1 | 12 | 2330.5 | 2330.5 | 2330.5 | 22 | 2 | |
| 5 | 64QAM | 1 | 24 | 2330.5 | 2330.5 | 2330.5 | | | |
| 5 | 64QAM | 12 | 0 | 2330.5 | 2330.5 | 2330.5 | | | |
| 5 | 64QAM | 12 | 7 | 2330.5 | 2330.5 | 2330.5 | 21 | 3 | |
| 5 | 64QAM | 12 | 13 | 2330.5 | 2330.5 | 2330.5 | | | |
| 5 | 64QAM | 25 | 0 | 2330.5 | 2330.5 | 2330.5 | | | |



Table 1: L1E Band 36

| SW (MHz) | Modulation | RB Size | RB Offset | Power Low Ch. (Freq.) | Power Max Ch. (Freq.) | Power High Ch. (Freq.) | Time-up time (dBm) | MFR (dB) |
|-----------------|------------|---------|-----------|-----------------------|-----------------------|------------------------|--------------------|----------|
| Channel | | | | | | | | |
| Frequency (MHz) | | | | | | | | |
| 10 | QPSK | 1 | 0 | 23.25 | | | | |
| 10 | QPSK | 1 | 24 | 23.12 | | | 24 | 0 |
| 10 | QPSK | 25 | 0 | 22.88 | | | | |
| 10 | QPSK | 25 | 12 | 22.48 | | | | |
| 10 | QPSK | 25 | 24 | 22.47 | | | 23 | 1 |
| 10 | QPSK | 50 | 0 | 22.46 | | | | |
| 10 | 16QAM | 1 | 0 | 22.87 | | | | |
| 10 | 16QAM | 1 | 24 | 22.88 | | | 23 | 1 |
| 10 | 16QAM | 1 | 48 | 22.85 | | | | |
| 10 | 16QAM | 25 | 0 | 21.28 | | | | |
| 10 | 16QAM | 25 | 12 | 21.61 | | | 22 | 2 |
| 10 | 16QAM | 25 | 24 | 21.50 | | | | |
| 10 | 16QAM | 50 | 0 | 21.28 | | | | |
| 10 | 64QAM | 1 | 0 | 21.25 | | | | |
| 10 | 64QAM | 1 | 24 | 21.11 | | | 22 | 2 |
| 10 | 64QAM | 1 | 48 | 21.22 | | | | |
| 10 | 64QAM | 25 | 0 | 20.20 | | | | |
| 10 | 64QAM | 25 | 12 | 19.93 | | | | |
| 10 | 64QAM | 25 | 24 | 19.87 | | | 21 | 3 |
| 10 | 64QAM | 50 | 0 | 19.88 | | | | |
| Channel | | | | | | | | |
| Frequency (MHz) | | | | | | | | |
| 5 | QPSK | 1 | 0 | 23.17 | 23.10 | 23.03 | | |
| 5 | QPSK | 1 | 12 | 23.11 | 23.05 | 23.01 | 24 | 0 |
| 5 | QPSK | 1 | 24 | 23.02 | 23.10 | 23.04 | | |
| 5 | QPSK | 12 | 0 | 22.61 | 22.59 | 22.48 | | |
| 5 | QPSK | 12 | 7 | 22.53 | 22.51 | 22.59 | 23 | 1 |
| 5 | QPSK | 12 | 14 | 22.10 | 22.40 | 22.54 | | |
| 5 | QPSK | 25 | 0 | 22.46 | 22.50 | 22.58 | | |
| 5 | 16QAM | 1 | 0 | 22.86 | 22.79 | 22.77 | | |
| 5 | 16QAM | 1 | 12 | 22.82 | 22.71 | 22.72 | 23 | 1 |
| 5 | 16QAM | 1 | 24 | 22.76 | 22.82 | 22.74 | | |
| 5 | 16QAM | 12 | 0 | 21.82 | 21.60 | 21.50 | | |
| 5 | 16QAM | 12 | 7 | 21.62 | 21.59 | 21.63 | 22 | 2 |
| 5 | 16QAM | 12 | 14 | 21.01 | 21.20 | 21.52 | | |
| 5 | 16QAM | 25 | 0 | 21.59 | 21.54 | 21.57 | | |
| 5 | 64QAM | 1 | 0 | 21.45 | 21.33 | 21.23 | | |
| 5 | 64QAM | 1 | 12 | 21.38 | 21.25 | 21.26 | 22 | 2 |
| 5 | 64QAM | 1 | 24 | 21.25 | 21.21 | 21.22 | | |
| 5 | 64QAM | 12 | 0 | 20.15 | 20.10 | 20.19 | | |
| 5 | 64QAM | 12 | 7 | 20.11 | 20.04 | 20.06 | 21 | 3 |
| 5 | 64QAM | 12 | 14 | 20.06 | 20.00 | 20.06 | | |
| 5 | 64QAM | 25 | 0 | 20.12 | 20.05 | 20.14 | | |

Table 2: L1E Band 46

| SW (MHz) | Modulation | RB Size | RB Offset | Power Low Ch. (Freq.) | Power Max Ch. (Freq.) | Power High Ch. (Freq.) | Time-up time (dBm) | MFR (dB) |
|-----------------|------------|---------|-----------|-----------------------|-----------------------|------------------------|--------------------|----------|
| Channel | | | | | | | | |
| Frequency (MHz) | | | | | | | | |
| 20 | QPSK | 1 | 0 | 23.25 | 23.24 | 23.23 | | |
| 20 | QPSK | 1 | 48 | 23.07 | 23.09 | 23.11 | 24 | 0 |
| 20 | QPSK | 1 | 96 | 23.12 | 23.24 | 23.30 | | |
| 20 | QPSK | 50 | 0 | 22.50 | 22.58 | 22.68 | | |
| 20 | QPSK | 50 | 24 | 22.25 | 22.19 | 22.21 | 23 | 1 |
| 20 | QPSK | 50 | 48 | 22.26 | 22.27 | 22.23 | | |
| 20 | QPSK | 100 | 0 | 22.50 | 22.58 | 22.68 | | |
| 20 | 16QAM | 1 | 0 | 22.87 | 22.79 | 22.84 | | |
| 20 | 16QAM | 1 | 48 | 22.45 | 22.52 | 22.49 | 23 | 1 |
| 20 | 16QAM | 1 | 96 | 22.20 | 22.24 | 22.23 | | |
| 20 | 16QAM | 50 | 0 | 21.17 | 21.28 | 21.23 | | |
| 20 | 16QAM | 50 | 24 | 21.22 | 21.17 | 21.21 | 22 | 2 |
| 20 | 16QAM | 50 | 48 | 21.26 | 21.29 | 21.24 | | |
| 20 | 16QAM | 100 | 0 | 21.26 | 21.28 | 21.27 | | |
| 20 | 64QAM | 1 | 0 | 21.46 | 21.28 | 21.59 | | |
| 20 | 64QAM | 1 | 48 | 21.44 | 21.38 | 21.51 | 22 | 2 |
| 20 | 64QAM | 1 | 96 | 21.27 | 21.36 | 21.53 | | |
| 20 | 64QAM | 50 | 0 | 20.90 | 20.87 | 20.92 | | |
| 20 | 64QAM | 50 | 24 | 20.58 | 20.54 | 20.49 | 21 | 3 |
| 20 | 64QAM | 50 | 48 | 20.45 | 20.29 | 20.55 | | |
| 20 | 64QAM | 100 | 0 | 20.44 | 20.48 | 20.46 | | |
| Channel | | | | | | | | |
| Frequency (MHz) | | | | | | | | |
| 10 | QPSK | 1 | 0 | 23.31 | 23.38 | 23.12 | | |
| 10 | QPSK | 1 | 37 | 23.11 | 23.09 | 23.00 | 24 | 0 |
| 10 | QPSK | 1 | 74 | 23.12 | 23.19 | 23.21 | | |
| 10 | QPSK | 36 | 0 | 22.24 | 22.30 | 22.33 | | |
| 10 | QPSK | 36 | 20 | 22.20 | 22.13 | 22.17 | 23 | 1 |
| 10 | QPSK | 36 | 40 | 22.12 | 22.16 | 22.24 | | |
| 10 | QPSK | 75 | 0 | 22.27 | 22.18 | 22.22 | | |
| 10 | 16QAM | 1 | 0 | 22.78 | 22.74 | 22.82 | | |
| 10 | 16QAM | 1 | 37 | 22.72 | 22.49 | 22.46 | 23 | 1 |
| 10 | 16QAM | 1 | 74 | 22.77 | 22.81 | 22.75 | | |
| 10 | 16QAM | 36 | 0 | 21.24 | 21.31 | 21.31 | | |
| 10 | 16QAM | 36 | 20 | 21.29 | 21.16 | 21.15 | 22 | 2 |
| 10 | 16QAM | 36 | 40 | 21.16 | 21.17 | 21.28 | | |
| 10 | 16QAM | 75 | 0 | 21.24 | 21.19 | 21.20 | | |
| 10 | 64QAM | 1 | 0 | 21.02 | 21.13 | 21.27 | | |
| 10 | 64QAM | 1 | 37 | 21.08 | 20.80 | 21.00 | 22 | 2 |
| 10 | 64QAM | 1 | 74 | 21.13 | 21.23 | 21.23 | | |
| 10 | 64QAM | 36 | 0 | 19.83 | 20.03 | 20.16 | | |
| 10 | 64QAM | 36 | 20 | 20.02 | 19.83 | 20.01 | 21 | 3 |
| 10 | 64QAM | 36 | 40 | 19.97 | 19.98 | 20.06 | | |
| 10 | 64QAM | 75 | 0 | 19.98 | 19.94 | 20.04 | | |
| Channel | | | | | | | | |
| Frequency (MHz) | | | | | | | | |
| 10 | QPSK | 1 | 0 | 23.13 | 23.10 | 23.11 | | |
| 10 | QPSK | 1 | 24 | 22.97 | 22.91 | 23.15 | 24 | 0 |
| 10 | QPSK | 1 | 48 | 23.23 | 23.29 | 23.30 | | |
| 10 | QPSK | 25 | 0 | 22.06 | 22.11 | 22.09 | | |
| 10 | QPSK | 25 | 12 | 22.12 | 22.13 | 22.18 | 23 | 1 |
| 10 | QPSK | 25 | 24 | 22.28 | 22.29 | 22.30 | | |
| 10 | 16QAM | 1 | 0 | 22.80 | 22.74 | 22.25 | | |
| 10 | 16QAM | 1 | 24 | 22.72 | 22.78 | 22.81 | 23 | 1 |
| 10 | 16QAM | 1 | 48 | 22.45 | 22.50 | 22.47 | | |
| 10 | 16QAM | 25 | 0 | 21.05 | 21.09 | 21.10 | | |
| 10 | 16QAM | 25 | 12 | 21.10 | 21.10 | 21.10 | 22 | 2 |
| 10 | 16QAM | 25 | 24 | 21.28 | 21.24 | 21.27 | | |
| 10 | 16QAM | 50 | 0 | 21.11 | 21.12 | 21.23 | | |
| 10 | 16QAM | 12 | 13 | 21.02 | 21.28 | 21.12 | 22 | 2 |
| 10 | 64QAM | 1 | 0 | 21.09 | 21.45 | 21.49 | | |
| 10 | 64QAM | 1 | 24 | 21.06 | 21.00 | 21.00 | 22 | 2 |
| 10 | 64QAM | 1 | 48 | 21.26 | 21.00 | 21.00 | | |
| 10 | 64QAM | 25 | 0 | 19.75 | 19.84 | 19.83 | 21 | 3 |
| 10 | 64QAM | 25 | 12 | 19.88 | 19.86 | 20.00 | | |
| 10 | 64QAM | 25 | 24 | 19.97 | 20.11 | 20.10 | | |
| 10 | 64QAM | 50 | 0 | 19.90 | 19.88 | 20.12 | | |
| Channel | | | | | | | | |
| Frequency (MHz) | | | | | | | | |
| 5 | QPSK | 1 | 0 | 23.12 | 23.16 | 23.20 | | |
| 5 | QPSK | 1 | 12 | 23.07 | 22.99 | 23.11 | 24 | 0 |
| 5 | QPSK | 1 | 24 | 22.99 | 22.99 | 23.12 | | |
| 5 | QPSK | 12 | 0 | 22.12 | 22.16 | 22.23 | | |
| 5 | QPSK | 12 | 7 | 22.10 | 22.11 | 22.16 | 23 | 1 |
| 5 | QPSK | 12 | 14 | 22.07 | 22.10 | 22.15 | | |
| 5 | 16QAM | 1 | 0 | 22.47 | 22.25 | 22.41 | | |
| 5 | 16QAM | 1 | 12 | 22.30 | 22.34 | 22.36 | 23 | 1 |
| 5 | 16QAM | 1 | 24 | 22.32 | 22.40 | 22.42 | | |
| 5 | 16QAM | 12 | 0 | 21.16 | 21.16 | 21.25 | | |
| 5 | 16QAM | 12 | 7 | 21.11 | 21.11 | 21.23 | 22 | 2 |
| 5 | 16QAM | 12 | 14 | 21.05 | 21.20 | 21.15 | | |
| 5 | 64QAM | 1 | 0 | 21.08 | 21.07 | 21.01 | | |
| 5 | 64QAM | 1 | 12 | 21.02 | 21.45 | 21.54 | | |
| 5 | 64QAM | 1 | 24 | 21.20 | 21.19 | 21.25 | 22 | 2 |
| 5 | 64QAM | 12 | 0 | 21.30 | 21.16 | 21.15 | | |
| 5 | 64QAM | 12 | 7 | 19.84 | 19.80 | 20.12 | 21 | 3 |
| 5 | 64QAM | 12 | 14 | 19.82 | 19.85 | 20.00 | | |
| 5 | 64QAM | 25 | 0 | 19.87 | 19.80 | 20.02 | | |
| Channel | | | | | | | | |
| Frequency (MHz) | | | | | | | | |
| 3 | QPSK | 1 | 0 | 23.10 | 23.20 | 23.20 | | |
| 3 | QPSK | 1 | 9 | 23.00 | 23.19 | 23.16 | 24 | 0 |
| 3 | QPSK | 1 | 18 | 22.90 | 23.11 | 23.09 | | |
| 3 | QPSK | 8 | 0 | 22.08 | 22.14 | 22.20 | | |
| 3 | QPSK | 8 | 4 | 22.08 | 22.12 | 22.20 | 23 | 1 |
| 3 | QPSK | 8 | 7 | 22.00 | 22.14 | 22.15 | | |
| 3 | QPSK | 15 | 0 | 22.08 | 22.13 | 22.17 | | |
| 3 | 16QAM | 1 | 0 | 22.37 | 22.41 | 22.53 | | |
| 3 | 16QAM | 1 | 9 | 22.20 | 22.20 | 22.48 | 23 | 1 |
| 3 | 16QAM | 1 | 18 | 22.01 | 22.08 | 22.05 | | |
| 3 | 16QAM | 8 | 0 | 21.16 | 21.17 | 21.22 | | |
| 3 | 16QAM | 8 | 4 | 21.15 | 21.18 | 21.25 | 22 | 2 |
| 3 | 16QAM | 8 | 7 | 21.10 | 21.26 | 21.23 | | |
| 3 | 16QAM | 15 | 0 | 21.07 | 21.12 | 21.19 | | |
| 3 | 64QAM | 1 | 0 | 21.40 | 21.28 | 21.21 | | |
| 3 | 64QAM | 1 | 9 | 21.21 | 21.27 | 21.28 | 22 | 2 |
| 3 | 64QAM | 1 | 18 | 21.32 | 21.16 | 21.22 | | |
| 3 | 64QAM | 8 | 0 | 19.87 | 19.80 | 20.04 | | |
| 3 | 64QAM | 8 | 4 | 19.88 | 19.88 | 20.05 | 21 | 3 |
| 3 | 64QAM | 8 | | | | | | |



Reduced Power Mode for P-Sensor On

| GSM1900 TX Channel | Burst Average Power (dBm) | | | Tune-up Limit (dBm) | Frame-Average Power (dBm) | | | Tune-up Limit (dBm) |
|-----------------------|---------------------------|-------|--------|---------------------------|---------------------------|-------|--------|---------------------------|
| | 512 | 661 | 810 | | 512 | 661 | 810 | |
| Frequency (MHz) | 1520.2 | 1530 | 1539.8 | | 1520.2 | 1530 | 1539.8 | |
| GSM 1 Tx slot | 26.12 | 26.08 | 26.15 | 27.00 | 17.12 | 17.08 | 17.15 | 18.00 |
| GPRS 1 Tx slot | 26.15 | 26.06 | 26.14 | 27.00 | 17.15 | 17.06 | 17.14 | 18.00 |
| GPRS 2 Tx slots | 22.41 | 22.43 | 22.36 | 24.00 | 16.41 | 16.43 | 16.36 | 18.00 |
| GPRS 3 Tx slots | 20.97 | 20.84 | 20.90 | 22.00 | 16.71 | 16.58 | 16.64 | 17.74 |
| GPRS 4 Tx slots | 19.60 | 19.62 | 19.63 | 20.50 | 16.60 | 16.62 | 16.63 | 17.50 |
| EDGE 1 Tx slot | 21.95 | 22.02 | 21.89 | 22.50 | 12.95 | 13.02 | 12.89 | 13.50 |
| EDGE 2 Tx slots | 21.81 | 21.92 | 21.71 | 22.50 | 15.81 | 15.92 | 15.71 | 16.50 |
| EDGE 3 Tx slots | 19.82 | 20.12 | 19.72 | 20.50 | 15.56 | 15.86 | 15.46 | 16.24 |
| EDGE 4 Tx slots | 18.71 | 18.84 | 18.69 | 19.50 | 15.71 | 15.84 | 15.59 | 16.50 |



| Band | | WCDMA II | | | Tune-up Limit (dBm) | WCDMA IV | | | Tune-up Limit (dBm) | WCDMA V | | | Tune-up Limit (dBm) |
|-----------------|-------------------|----------|-------|--------|---------------------|----------|--------|-------|---------------------|---------|-------|-------|---------------------|
| Tx Channel | | 9202 | 9400 | 9538 | | 1312 | 1313 | 1513 | | 4132 | 4132 | 4233 | |
| Rx Channel | | 9652 | 9800 | 9938 | | 1537 | 1539 | 1738 | | 4357 | 4407 | 4458 | |
| Frequency (MHz) | | 1852.4 | 1880 | 1907.6 | 1712.4 | 1732.6 | 1752.6 | 826.4 | 836.4 | 846.6 | | | |
| 3GPP Rel 99 | AMR 12.2kops | 14.22 | 14.26 | 14.20 | 15.50 | 15.28 | 15.22 | 15.13 | 16.00 | 20.87 | 21.13 | 21.07 | 22.00 |
| 3GPP Rel 99 | RMC 12.2kops | 14.21 | 14.28 | 14.22 | 15.50 | 15.22 | 15.27 | 15.18 | 16.00 | 20.86 | 21.16 | 21.11 | 22.00 |
| 3GPP Rel 6 | HSDPA Subtest1 | 13.64 | 13.54 | 13.68 | 14.50 | 14.18 | 14.05 | 14.14 | 15.00 | 20.17 | 20.36 | 20.41 | 21.00 |
| 3GPP Rel 6 | HSDPA Subtest2 | 13.63 | 13.76 | 13.65 | 14.50 | 14.15 | 14.12 | 14.07 | 15.00 | 20.19 | 20.35 | 20.32 | 21.00 |
| 3GPP Rel 6 | HSDPA Subtest3 | 12.97 | 12.98 | 13.10 | 14.00 | 13.63 | 13.54 | 13.67 | 14.50 | 19.68 | 19.56 | 19.90 | 20.50 |
| 3GPP Rel 6 | HSDPA Subtest4 | 13.08 | 13.10 | 12.98 | 14.00 | 13.68 | 13.65 | 13.63 | 14.50 | 19.67 | 19.67 | 19.67 | 20.50 |
| 3GPP Rel 8 | DC-HSDPA Subtest1 | 13.65 | 13.62 | 13.66 | 14.50 | 14.16 | 14.06 | 14.11 | 15.00 | 20.18 | 20.02 | 20.41 | 21.00 |
| 3GPP Rel 8 | DC-HSDPA Subtest2 | 13.62 | 13.87 | 13.54 | 14.50 | 14.13 | 14.07 | 14.14 | 15.00 | 20.18 | 20.01 | 20.38 | 21.00 |
| 3GPP Rel 8 | DC-HSDPA Subtest3 | 12.97 | 13.43 | 12.99 | 14.00 | 13.61 | 13.65 | 13.60 | 14.50 | 19.67 | 19.55 | 19.68 | 20.50 |
| 3GPP Rel 8 | DC-HSDPA Subtest4 | 12.96 | 12.96 | 12.98 | 14.00 | 13.60 | 13.70 | 13.54 | 14.50 | 19.63 | 19.51 | 19.79 | 20.50 |
| 3GPP Rel 6 | HSUPA Subtest1 | 13.65 | 13.65 | 13.66 | 14.50 | 14.28 | 14.32 | 14.13 | 15.00 | 20.17 | 20.12 | 20.46 | 21.00 |
| 3GPP Rel 6 | HSUPA Subtest2 | 11.82 | 11.76 | 11.88 | 12.50 | 12.16 | 12.24 | 12.21 | 13.00 | 18.21 | 18.22 | 18.37 | 19.00 |
| 3GPP Rel 6 | HSUPA Subtest3 | 12.74 | 12.74 | 12.87 | 13.50 | 13.06 | 13.08 | 12.97 | 14.00 | 19.13 | 19.18 | 19.35 | 20.00 |
| 3GPP Rel 6 | HSUPA Subtest4 | 11.64 | 11.76 | 11.88 | 12.50 | 12.07 | 12.15 | 11.97 | 13.00 | 18.06 | 18.24 | 18.35 | 19.00 |
| 3GPP Rel 6 | HSUPA Subtest5 | 13.90 | 13.66 | 13.97 | 14.50 | 14.26 | 14.22 | 14.16 | 15.00 | 20.03 | 20.25 | 20.34 | 21.00 |



LTE Band 2

| BW (MHz) | Modulation | RB Size | RB Offset | Power Low Ch / Freq | Power Middle Ch / Freq | Power High Ch / Freq | Tune-up limit (dBm) | MPR (dB) |
|-----------------|------------|---------|-----------|---------------------|------------------------|----------------------|---------------------|----------|
| Channel | | | | | | | | |
| Frequency (MHz) | | | | | | | | |
| 20 | QPSK | 1 | 0 | 15.94 | 15.07 | 15.83 | 16.5 | 0 |
| 20 | QPSK | 1 | 49 | 15.71 | 16.04 | 16.03 | | |
| 20 | QPSK | 1 | 99 | 15.67 | 15.91 | 15.89 | | |
| 20 | QPSK | 50 | 0 | 15.89 | 15.96 | 15.81 | | |
| 20 | QPSK | 50 | 24 | 15.95 | 15.81 | 15.77 | | |
| 20 | QPSK | 50 | 50 | 15.77 | 15.68 | 15.75 | | |
| 20 | QPSK | 100 | 0 | 15.91 | 15.99 | 15.79 | | |
| 20 | 16QAM | 1 | 0 | 15.94 | 15.98 | 15.85 | | |
| 20 | 16QAM | 1 | 49 | 15.86 | 15.86 | 15.73 | | |
| 20 | 16QAM | 1 | 99 | 15.83 | 15.96 | 15.85 | | |
| 20 | 16QAM | 50 | 0 | 15.99 | 15.84 | 15.75 | | |
| 20 | 16QAM | 50 | 24 | 15.83 | 15.84 | 15.72 | | |
| 20 | 16QAM | 50 | 50 | 15.68 | 15.68 | 15.71 | | |
| 20 | 16QAM | 100 | 0 | 15.92 | 15.79 | 15.89 | | |
| 20 | 64QAM | 1 | 0 | 15.86 | 15.76 | 15.84 | | |
| 20 | 64QAM | 1 | 49 | 15.73 | 15.65 | 15.82 | | |
| 20 | 64QAM | 1 | 99 | 15.73 | 15.96 | 15.96 | | |
| 20 | 64QAM | 50 | 0 | 16.01 | 15.87 | 15.78 | | |
| 20 | 64QAM | 50 | 24 | 15.93 | 15.77 | 15.73 | | |
| 20 | 64QAM | 50 | 50 | 15.81 | 15.59 | 15.74 | | |
| 20 | 64QAM | 100 | 0 | 15.87 | 15.80 | 15.75 | | |
| Channel | | | | | | | | |
| Frequency (MHz) | | | | | | | | |
| 15 | QPSK | 1 | 0 | 15.77 | 15.77 | 15.86 | 16.5 | 0 |
| 15 | QPSK | 1 | 37 | 15.57 | 15.98 | 15.71 | | |
| 15 | QPSK | 1 | 74 | 15.79 | 15.87 | 15.77 | | |
| 15 | QPSK | 36 | 0 | 15.93 | 15.96 | 15.83 | | |
| 15 | QPSK | 36 | 20 | 16.00 | 15.93 | 15.89 | | |
| 15 | QPSK | 36 | 39 | 15.87 | 15.81 | 15.87 | | |
| 15 | QPSK | 75 | 0 | 15.95 | 15.85 | 15.95 | | |
| 15 | 16QAM | 1 | 0 | 15.88 | 15.81 | 16.00 | | |
| 15 | 16QAM | 1 | 37 | 16.05 | 16.04 | 15.84 | | |
| 15 | 16QAM | 1 | 74 | 15.78 | 15.76 | 15.71 | | |
| 15 | 16QAM | 36 | 0 | 15.91 | 15.96 | 15.78 | | |
| 15 | 16QAM | 36 | 20 | 15.86 | 15.86 | 15.90 | | |
| 15 | 16QAM | 36 | 39 | 16.03 | 15.81 | 15.93 | | |
| 15 | 16QAM | 75 | 0 | 16.00 | 16.02 | 15.85 | | |
| 15 | 64QAM | 1 | 0 | 15.97 | 16.03 | 15.71 | | |
| 15 | 64QAM | 1 | 37 | 15.79 | 15.80 | 15.72 | | |
| 15 | 64QAM | 1 | 74 | 15.99 | 15.71 | 15.81 | | |
| 15 | 64QAM | 36 | 0 | 16.06 | 15.84 | 15.79 | | |
| 15 | 64QAM | 36 | 20 | 15.86 | 15.87 | 15.81 | | |
| 15 | 64QAM | 36 | 39 | 15.92 | 15.80 | 15.85 | | |
| 15 | 64QAM | 75 | 0 | 15.85 | 15.92 | 15.82 | | |
| Channel | | | | | | | | |
| Frequency (MHz) | | | | | | | | |
| 10 | QPSK | 1 | 0 | 15.76 | 15.77 | 15.74 | 16.5 | 0 |
| 10 | QPSK | 1 | 25 | 15.71 | 15.91 | 15.96 | | |
| 10 | QPSK | 1 | 49 | 15.84 | 15.78 | 15.73 | | |
| 10 | QPSK | 25 | 0 | 15.85 | 15.88 | 15.91 | | |
| 10 | QPSK | 25 | 12 | 15.91 | 15.83 | 15.87 | | |
| 10 | QPSK | 25 | 25 | 15.82 | 15.92 | 15.79 | | |
| 10 | QPSK | 50 | 0 | 15.90 | 15.92 | 15.81 | | |
| 10 | 16QAM | 1 | 0 | 16.01 | 15.99 | 15.88 | | |
| 10 | 16QAM | 1 | 25 | 15.85 | 15.91 | 16.04 | | |
| 10 | 16QAM | 1 | 49 | 16.02 | 15.99 | 16.03 | | |
| 10 | 16QAM | 25 | 0 | 15.90 | 15.90 | 15.91 | | |
| 10 | 16QAM | 25 | 12 | 15.91 | 15.78 | 15.77 | | |
| 10 | 16QAM | 25 | 25 | 15.85 | 15.70 | 15.72 | | |
| 10 | 64QAM | 1 | 0 | 15.92 | 15.96 | 15.82 | | |
| 10 | 64QAM | 1 | 25 | 15.92 | 15.96 | 15.83 | | |
| 10 | 64QAM | 1 | 49 | 15.85 | 15.84 | 15.78 | | |
| 10 | 64QAM | 25 | 0 | 15.87 | 15.88 | 15.87 | | |
| 10 | 64QAM | 25 | 12 | 15.78 | 15.88 | 15.82 | | |
| 10 | 64QAM | 25 | 25 | 15.85 | 15.92 | 15.77 | | |
| 10 | 64QAM | 50 | 0 | 15.78 | 15.86 | 15.85 | | |
| Channel | | | | | | | | |
| Frequency (MHz) | | | | | | | | |
| 5 | QPSK | 1 | 0 | 15.88 | 15.76 | 15.76 | 16.5 | 0 |
| 5 | QPSK | 1 | 12 | 15.82 | 15.68 | 15.68 | | |
| 5 | QPSK | 1 | 24 | 15.71 | 15.95 | 15.60 | | |
| 5 | QPSK | 12 | 0 | 15.95 | 15.94 | 15.99 | | |
| 5 | QPSK | 12 | 7 | 15.92 | 15.84 | 15.79 | | |
| 5 | QPSK | 12 | 13 | 15.83 | 15.90 | 15.75 | | |
| 5 | QPSK | 25 | 0 | 15.95 | 15.88 | 15.82 | | |
| 5 | 16QAM | 1 | 0 | 15.93 | 15.74 | 15.95 | | |
| 5 | 16QAM | 1 | 12 | 15.96 | 15.99 | 15.82 | | |
| 5 | 16QAM | 1 | 24 | 15.98 | 15.91 | 15.99 | | |
| 5 | 16QAM | 12 | 0 | 16.03 | 15.85 | 15.89 | | |
| 5 | 16QAM | 12 | 7 | 15.90 | 15.90 | 15.75 | | |
| 5 | 16QAM | 12 | 13 | 15.85 | 15.79 | 15.73 | | |
| 5 | 16QAM | 25 | 0 | 15.96 | 15.80 | 15.74 | | |
| 5 | 64QAM | 1 | 0 | 15.98 | 16.01 | 15.89 | | |
| 5 | 64QAM | 1 | 12 | 16.05 | 15.84 | 16.02 | | |
| 5 | 64QAM | 1 | 24 | 15.90 | 15.94 | 15.85 | | |
| 5 | 64QAM | 12 | 0 | 15.93 | 15.79 | 15.89 | | |
| 5 | 64QAM | 12 | 7 | 15.85 | 15.07 | 15.78 | | |
| 5 | 64QAM | 12 | 13 | 15.99 | 15.95 | 15.78 | | |
| 5 | 64QAM | 25 | 0 | 15.94 | 15.94 | 15.79 | | |
| Channel | | | | | | | | |
| Frequency (MHz) | | | | | | | | |
| 3 | QPSK | 1 | 0 | 16.04 | 15.89 | 15.75 | 16.5 | 0 |
| 3 | QPSK | 1 | 8 | 16.04 | 16.00 | 15.87 | | |
| 3 | QPSK | 1 | 14 | 16.06 | 15.72 | 15.84 | | |
| 3 | QPSK | 8 | 0 | 15.87 | 15.76 | 15.84 | | |
| 3 | QPSK | 8 | 4 | 15.90 | 15.68 | 15.91 | | |
| 3 | QPSK | 8 | 7 | 15.82 | 15.87 | 15.79 | | |
| 3 | QPSK | 15 | 0 | 15.85 | 15.83 | 15.71 | | |
| 3 | 16QAM | 1 | 0 | 16.03 | 15.70 | 15.81 | | |
| 3 | 16QAM | 1 | 8 | 15.99 | 15.97 | 15.96 | | |
| 3 | 16QAM | 1 | 14 | 15.75 | 16.01 | 15.97 | | |
| 3 | 16QAM | 8 | 0 | 15.88 | 15.66 | 15.70 | | |
| 3 | 16QAM | 8 | 4 | 15.89 | 15.92 | 15.95 | | |
| 3 | 16QAM | 8 | 7 | 15.70 | 15.74 | 15.65 | | |
| 3 | 16QAM | 15 | 0 | 15.72 | 15.83 | 15.72 | | |
| 3 | 64QAM | 1 | 0 | 15.81 | 16.01 | 15.87 | | |
| 3 | 64QAM | 1 | 8 | 15.92 | 15.88 | 15.75 | | |
| 3 | 64QAM | 1 | 14 | 15.83 | 16.01 | 15.94 | | |
| 3 | 64QAM | 8 | 0 | 15.82 | 15.98 | 15.97 | | |
| 3 | 64QAM | 8 | 4 | 15.87 | 16.03 | 16.00 | | |
| 3 | 64QAM | 8 | 7 | 15.80 | 16.00 | 15.97 | | |
| 3 | 64QAM | 15 | 0 | 15.90 | 15.86 | 15.92 | | |
| Channel | | | | | | | | |
| Frequency (MHz) | | | | | | | | |
| 1.4 | QPSK | 1 | 0 | 15.55 | 15.77 | 15.73 | 16.5 | 0 |
| 1.4 | QPSK | 1 | 3 | 16.00 | 16.01 | 15.82 | | |
| 1.4 | QPSK | 1 | 5 | 15.69 | 15.94 | 15.76 | | |
| 1.4 | QPSK | 3 | 0 | 15.99 | 15.92 | 15.87 | | |
| 1.4 | QPSK | 3 | 1 | 16.01 | 15.97 | 15.94 | | |
| 1.4 | QPSK | 3 | 3 | 15.91 | 16.00 | 15.81 | | |
| 1.4 | QPSK | 6 | 0 | 15.76 | 15.79 | 15.86 | | |
| 1.4 | 16QAM | 1 | 0 | 15.99 | 15.73 | 16.00 | | |
| 1.4 | 16QAM | 1 | 3 | 16.04 | 15.98 | 16.00 | | |
| 1.4 | 16QAM | 1 | 5 | 15.89 | 15.86 | 15.84 | | |
| 1.4 | 16QAM | 3 | 0 | 16.02 | 15.74 | 15.74 | | |
| 1.4 | 16QAM | 3 | 1 | 16.00 | 16.02 | 16.04 | | |
| 1.4 | 16QAM | 3 | 3 | 15.82 | 15.96 | 15.86 | | |
| 1.4 | 16QAM | 6 | 0 | 15.70 | 15.76 | 15.64 | | |
| 1.4 | 64QAM | 1 | 0 | 15.71 | 16.03 | 16.00 | | |
| 1.4 | 64QAM | 1 | 3 | 15.86 | 15.97 | 15.88 | | |
| 1.4 | 64QAM | 1 | 5 | 16.01 | 15.86 | 15.99 | | |
| 1.4 | 64QAM | 3 | 0 | 15.92 | 15.91 | 15.86 | | |
| 1.4 | 64QAM | 3 | 1 | 16.04 | 15.97 | 15.91 | | |
| 1.4 | 64QAM | 3 | 3 | 16.01 | 15.75 | 15.81 | | |
| 1.4 | 64QAM | 6 | 0 | 16.01 | 16.04 | 15.83 | | |

LTE Band 4

| BW (MHz) | Modulation | RB Size | RB Offset | Power Low Ch / Freq | Power Middle Ch / Freq | Power High Ch / Freq | Tune-up limit (dBm) | MPR (dB) |
|-----------------|------------|---------|-----------|---------------------|------------------------|----------------------|---------------------|----------|
| Channel | | | | | | | | |
| Frequency (MHz) | | | | | | | | |
| 20 | QPSK | 1 | 0 | 15.78 | 16.02 | 15.97 | 16.5 | 0 |
| 20 | QPSK | 1 | 49 | 15.80 | 15.88 | 15.79 | | |
| 20 | QPSK | 1 | 99 | 15.73 | 15.87 | 15.72 | | |
| 20 | QPSK | 50 | 0 | 15.85 | 15.84 | 15.79 | | |
| 20 | QPSK | 50 | 24 | 15.88 | 15.72 | 15.75 | | |
| 20 | QPSK | 50 | 50 | 15.77 | 15.81 | 15.68 | | |
| 20 | QPSK | 100 | 0 | 16.74 | 16.88 | 16.80 | | |
| 20 | 16QAM | 1 | 0 | 15.71 | 15.76 | 15.74 | | |
| 20 | 16QAM | 1 | 49 | 15.99 | 15.88 | 15.74 | | |
| 20 | 16QAM | 1 | 99 | 15.69 | 15.86 | 15.75 | | |
| 20 | 16QAM | 50 | 0 | 15.76 | 15.84 | 15.74 | | |
| 20 | 16QAM | 50 | 24 | 15.92 | 15.76 | 15.73 | | |
| 20 | 16QAM | 50 | 50 | 15.79 | 15.67 | 15.82 | | |
| 20 | 16QAM | 100 | 0 | 15.74 | 15.73 | 15.73 | | |
| 20 | 64QAM | 1 | 0 | 15.88 | 15.74 | 15.73 | | |
| 20 | 64QAM | 1 | 49 | 15.84 | 15.83 | 15.74 | | |
| 20 | 64QAM | 50 | 0 | 16.01 | 15.85 | 15.77 | | |
| 20 | 64QAM | 50 | 24 | 15.87 | 15.77 | 15.72 | | |
| 20 | 64QAM | 50 | 50 | 15.84 | 15.78 | 15.66 | | |
| 20 | 64QAM | 100 | 0 | 15.88 | 15.73 | 15.81 | | |
| Channel | | | | | | | | |
| Frequency (MHz) | | | | | | | | |
| 15 | QPSK | 1 | 0 | 15.45 | 15.70 | 15.71 | 16.5 | 0 |
| 15 | QPSK | 1 | 37 | 15.87 | 15.98 | 15.88 | | |
| 15 | QPSK | 1 | 74 | 15.99 | 15.72 | 15.80 | | |
| 15 | QPSK | 36 | 0 | 15.73 | 15.80 | 15.80 | | |
| 15 | QPSK | 36 | 20 | 15.79 | 15.71 | 15.66 | | |
| 15 | QPSK | 36 | 39 | 15.82 | 15.76 | 15.66 | | |
| 15 | QPSK | 75 | 0 | 15.77 | 15.89 | 15.74 | | |
| 15 | 16QAM | 1 | 0 | 15.71 | 15.85 | 15.75 | | |
| 15 | 16QAM | 1 | 37 | 15.74 | 15.99 | 15.84 | | |
| 15 | 16QAM | 1 | 74 | 15.72 | 15.74 | 15.82 | | |
| 15 | 16QAM | 36 | 0 | 15.73 | 15.78 | 15.78 | | |
| 15 | 16QAM | 36 | 20 | 15.77 | 15.79 | 15.68 | | |
| 15 | 16QAM | 36 | 39 | 15.78 | 15.79 | 15.68 | | |
| 15 | 16QAM | 75 | 0 | 15.84 | 15.71 | 15. | | |



LTE Band 30

| Channel | Frequency (MHz) | Power Low Ch / Freq | Power Middle Ch / Freq | Power High Ch / Freq | Tune-up limit (dBm) | MPR (dB) |
|-------------------------------|-----------------|---------------------|------------------------|----------------------|---------------------|----------|
| Channel 27685 - 27710 - 27735 | | | | | | |
| 10 | QPSK | 1 | 0 | 20.15 | 21 | 0 |
| 10 | QPSK | 1 | 25 | 20.03 | | |
| 10 | QPSK | 1 | 49 | 19.99 | | |
| 10 | QPSK | 25 | 0 | 20.11 | | |
| 10 | QPSK | 25 | 12 | 19.76 | | |
| 10 | QPSK | 25 | 25 | 19.78 | | |
| 10 | QPSK | 50 | 0 | 20.05 | | |
| 10 | 16QAM | 1 | 0 | 19.82 | | |
| 10 | 16QAM | 1 | 25 | 19.69 | | |
| 10 | 16QAM | 1 | 49 | 19.66 | | |
| 10 | 16QAM | 25 | 0 | 19.41 | | |
| 10 | 16QAM | 25 | 12 | 19.44 | | |
| 10 | 16QAM | 25 | 25 | 19.33 | | |
| 10 | 16QAM | 50 | 0 | 19.36 | | |
| 10 | 16QAM | 1 | 0 | 19.89 | | |
| 10 | 16QAM | 1 | 25 | 19.83 | | |
| 10 | 16QAM | 1 | 49 | 19.78 | | |
| 10 | 16QAM | 25 | 0 | 19.86 | | |
| 10 | 16QAM | 25 | 12 | 19.76 | | |
| 10 | 16QAM | 25 | 25 | 19.70 | | |
| 10 | 16QAM | 50 | 0 | 19.71 | | |
| Channel 27685 - 27710 - 27735 | | | | | | |
| 5 | QPSK | 1 | 0 | 20.04 | 21 | 0 |
| 5 | QPSK | 1 | 12 | 20.08 | | |
| 5 | QPSK | 1 | 24 | 19.99 | | |
| 5 | QPSK | 12 | 0 | 20.11 | | |
| 5 | QPSK | 12 | 7 | 20.03 | | |
| 5 | QPSK | 12 | 13 | 20.03 | | |
| 5 | QPSK | 25 | 0 | 20.09 | | |
| 5 | 16QAM | 1 | 0 | 19.97 | | |
| 5 | 16QAM | 1 | 12 | 19.85 | | |
| 5 | 16QAM | 1 | 24 | 19.85 | | |
| 5 | 16QAM | 12 | 0 | 20.02 | | |
| 5 | 16QAM | 12 | 7 | 20.03 | | |
| 5 | 16QAM | 12 | 13 | 20.03 | | |
| 5 | 16QAM | 25 | 0 | 20.00 | | |
| 5 | 16QAM | 25 | 0 | 20.00 | | |
| 5 | 16QAM | 25 | 0 | 20.00 | | |
| 5 | 16QAM | 1 | 0 | 20.12 | | |
| 5 | 16QAM | 1 | 12 | 20.00 | | |
| 5 | 16QAM | 1 | 24 | 20.10 | | |
| 5 | 16QAM | 12 | 0 | 20.12 | | |
| 5 | 16QAM | 12 | 7 | 20.13 | | |
| 5 | 16QAM | 12 | 13 | 20.10 | | |
| 5 | 16QAM | 25 | 0 | 20.14 | | |

LTE Band 66

| Channel | Frequency (MHz) | Power Low Ch / Freq | Power Middle Ch / Freq | Power High Ch / Freq | Tune-up limit (dBm) | MPR (dB) |
|-------------------------------|-----------------|---------------------|------------------------|----------------------|---------------------|----------|
| Channel 13072 - 13072 - 13072 | | | | | | |
| 20 | QPSK | 1 | 0 | 16.01 | 16.5 | 0 |
| 20 | QPSK | 1 | 49 | 16.00 | | |
| 20 | QPSK | 1 | 99 | 15.96 | | |
| 20 | QPSK | 50 | 0 | 15.82 | | |
| 20 | QPSK | 50 | 24 | 15.57 | | |
| 20 | QPSK | 50 | 50 | 15.50 | | |
| 20 | QPSK | 100 | 0 | 15.52 | | |
| 20 | 16QAM | 1 | 0 | 15.57 | | |
| 20 | 16QAM | 1 | 49 | 15.97 | | |
| 20 | 16QAM | 1 | 99 | 15.80 | | |
| 20 | 16QAM | 50 | 0 | 15.43 | | |
| 20 | 16QAM | 50 | 24 | 15.50 | | |
| 20 | 16QAM | 50 | 50 | 15.53 | | |
| 20 | 16QAM | 100 | 0 | 15.54 | | |
| 20 | 64QAM | 1 | 0 | 15.88 | | |
| 20 | 64QAM | 1 | 49 | 15.73 | | |
| 20 | 64QAM | 1 | 99 | 15.84 | | |
| 20 | 64QAM | 50 | 0 | 15.42 | | |
| 20 | 64QAM | 50 | 24 | 15.49 | | |
| 20 | 64QAM | 50 | 50 | 15.51 | | |
| 20 | 64QAM | 100 | 0 | 15.51 | | |
| Channel 13047 - 13052 - 13097 | | | | | | |
| 15 | QPSK | 1 | 0 | 15.59 | 16.5 | 0 |
| 15 | QPSK | 1 | 37 | 15.90 | | |
| 15 | QPSK | 1 | 74 | 15.81 | | |
| 15 | QPSK | 36 | 0 | 15.93 | | |
| 15 | QPSK | 36 | 20 | 15.46 | | |
| 15 | QPSK | 36 | 39 | 15.47 | | |
| 15 | QPSK | 75 | 0 | 15.47 | | |
| 15 | 16QAM | 1 | 0 | 15.75 | | |
| 15 | 16QAM | 1 | 37 | 15.39 | | |
| 15 | 16QAM | 1 | 74 | 15.81 | | |
| 15 | 16QAM | 36 | 0 | 15.54 | | |
| 15 | 16QAM | 36 | 20 | 15.42 | | |
| 15 | 16QAM | 36 | 39 | 15.49 | | |
| 15 | 16QAM | 75 | 0 | 15.45 | | |
| 15 | 64QAM | 1 | 0 | 15.56 | | |
| 15 | 64QAM | 1 | 37 | 15.29 | | |
| 15 | 64QAM | 1 | 74 | 15.45 | | |
| 15 | 64QAM | 36 | 0 | 15.54 | | |
| 15 | 64QAM | 36 | 20 | 15.42 | | |
| 15 | 64QAM | 36 | 39 | 15.47 | | |
| 15 | 64QAM | 75 | 0 | 15.42 | | |
| Channel 13202 - 13202 - 13202 | | | | | | |
| 10 | QPSK | 1 | 0 | 19.21 | 16.5 | 0 |
| 10 | QPSK | 1 | 25 | 19.22 | | |
| 10 | QPSK | 1 | 49 | 19.31 | | |
| 10 | QPSK | 25 | 0 | 19.22 | | |
| 10 | QPSK | 25 | 12 | 19.29 | | |
| 10 | QPSK | 25 | 25 | 19.34 | | |
| 10 | QPSK | 50 | 0 | 19.35 | | |
| 10 | 16QAM | 1 | 0 | 19.36 | | |
| 10 | 16QAM | 1 | 25 | 19.62 | | |
| 10 | 16QAM | 1 | 49 | 19.29 | | |
| 10 | 16QAM | 25 | 0 | 19.50 | | |
| 10 | 16QAM | 25 | 12 | 19.54 | | |
| 10 | 16QAM | 25 | 25 | 19.55 | | |
| 10 | 16QAM | 50 | 0 | 19.48 | | |
| Channel 13097 - 13097 - 13097 | | | | | | |
| 5 | QPSK | 1 | 0 | 15.59 | 16.5 | 0 |
| 5 | QPSK | 1 | 12 | 15.42 | | |
| 5 | QPSK | 1 | 24 | 15.42 | | |
| 5 | QPSK | 12 | 0 | 15.60 | | |
| 5 | QPSK | 12 | 7 | 15.55 | | |
| 5 | QPSK | 12 | 13 | 15.49 | | |
| 5 | QPSK | 25 | 0 | 15.56 | | |
| 5 | 16QAM | 1 | 0 | 15.45 | | |
| 5 | 16QAM | 1 | 12 | 15.40 | | |
| 5 | 16QAM | 1 | 24 | 15.34 | | |
| 5 | 16QAM | 12 | 0 | 15.82 | | |
| 5 | 16QAM | 12 | 7 | 15.54 | | |
| 5 | 16QAM | 12 | 13 | 15.54 | | |
| 5 | 16QAM | 25 | 0 | 15.55 | | |
| 5 | 64QAM | 1 | 0 | 15.86 | | |
| 5 | 64QAM | 1 | 12 | 15.74 | | |
| 5 | 64QAM | 1 | 24 | 15.69 | | |
| 5 | 64QAM | 12 | 0 | 15.58 | | |
| 5 | 64QAM | 12 | 7 | 15.52 | | |
| 5 | 64QAM | 12 | 13 | 15.50 | | |
| 5 | 64QAM | 25 | 0 | 15.53 | | |
| Channel 13187 - 13202 - 13267 | | | | | | |
| 3 | QPSK | 1 | 0 | 15.25 | 16.5 | 0 |
| 3 | QPSK | 1 | 8 | 15.45 | | |
| 3 | QPSK | 1 | 14 | 15.67 | | |
| 3 | QPSK | 8 | 0 | 15.55 | | |
| 3 | QPSK | 8 | 4 | 15.52 | | |
| 3 | QPSK | 8 | 7 | 15.49 | | |
| 3 | QPSK | 15 | 0 | 15.55 | | |
| 3 | 16QAM | 1 | 0 | 15.93 | | |
| 3 | 16QAM | 1 | 8 | 15.76 | | |
| 3 | 16QAM | 1 | 14 | 15.67 | | |
| 3 | 16QAM | 8 | 0 | 15.72 | | |
| 3 | 16QAM | 8 | 4 | 15.53 | | |
| 3 | 16QAM | 8 | 7 | 15.61 | | |
| 3 | 16QAM | 15 | 0 | 15.27 | | |
| 3 | 64QAM | 1 | 0 | 15.43 | | |
| 3 | 64QAM | 1 | 8 | 15.34 | | |
| 3 | 64QAM | 1 | 14 | 15.26 | | |
| 3 | 64QAM | 8 | 0 | 15.60 | | |
| 3 | 64QAM | 8 | 4 | 15.34 | | |
| 3 | 64QAM | 8 | 7 | 15.74 | | |
| 3 | 64QAM | 15 | 0 | 15.36 | | |
| Channel 13072 - 13072 - 13072 | | | | | | |
| 1.4 | QPSK | 1 | 0 | 15.34 | 16.5 | 0 |
| 1.4 | QPSK | 1 | 3 | 15.40 | | |
| 1.4 | QPSK | 1 | 5 | 15.51 | | |
| 1.4 | QPSK | 3 | 0 | 15.57 | | |
| 1.4 | QPSK | 3 | 1 | 15.60 | | |
| 1.4 | QPSK | 3 | 3 | 15.36 | | |
| 1.4 | QPSK | 8 | 0 | 15.52 | | |
| 1.4 | 16QAM | 1 | 0 | 15.37 | | |
| 1.4 | 16QAM | 1 | 3 | 15.57 | | |
| 1.4 | 16QAM | 1 | 5 | 15.37 | | |
| 1.4 | 16QAM | 3 | 0 | 15.55 | | |
| 1.4 | 16QAM | 3 | 3 | 15.47 | | |
| 1.4 | 16QAM | 3 | 5 | 15.75 | | |
| 1.4 | 16QAM | 6 | 0 | 15.50 | | |
| 1.4 | 64QAM | 1 | 0 | 15.75 | | |
| 1.4 | 64QAM | 1 | 3 | 15.47 | | |
| 1.4 | 64QAM | 1 | 5 | 15.27 | | |
| 1.4 | 64QAM | 3 | 0 | 15.63 | | |
| 1.4 | 64QAM | 3 | 1 | 15.40 | | |
| 1.4 | 64QAM | 3 | 3 | 15.27 | | |
| 1.4 | 64QAM | 6 | 0 | 15.19 | | |



Reduced Power Mode for Hotspot On

| GSM1900 TX Channel Frequency (MHz) | Burst Average Power (dBm) | | | Tune-up Limit (dBm) | Frame-Average Power (dBm) | | | Tune-up Limit (dBm) |
|------------------------------------------|---------------------------|-------------|---------------|---------------------------|---------------------------|-------------|---------------|---------------------------|
| | 512 1850.2 | 661 1880 | 810 1909.8 | | 512 1850.2 | 661 1880 | 810 1909.8 | |
| GSM 1 Tx slot | 23.45 | 23.57 | 23.47 | 24.50 | 14.45 | 14.57 | 14.47 | 15.50 |
| GPRS 1 Tx slot | 23.44 | 23.45 | 23.45 | 24.50 | 14.44 | 14.45 | 14.45 | 15.50 |
| GPRS 2 Tx slots | 20.05 | 20.21 | 20.11 | 21.50 | 14.05 | 14.21 | 14.11 | 15.50 |
| GPRS 3 Tx slots | 17.78 | 18.10 | 17.82 | 19.50 | 13.52 | 13.84 | 13.56 | 15.24 |
| GPRS 4 Tx slots | 16.70 | 16.96 | 16.86 | 18.00 | 13.70 | 13.98 | 13.66 | 15.00 |
| EDGE 1 Tx slot | 19.58 | 19.53 | 19.43 | 20.00 | 10.56 | 10.53 | 10.43 | 11.00 |
| EDGE 2 Tx slots | 19.66 | 19.51 | 19.45 | 20.00 | 13.66 | 13.51 | 13.45 | 14.00 |
| EDGE 3 Tx slots | 17.74 | 17.69 | 17.84 | 18.00 | 13.48 | 13.43 | 13.58 | 13.74 |
| EDGE 4 Tx slots | 16.05 | 16.15 | 16.05 | 17.00 | 13.05 | 13.15 | 13.05 | 14.00 |



| Band | | WCDMA II | | | Tune-up Limit (dBm) | WCDMA IV | | | Tune-up Limit (dBm) | WCDMA V | | | Tune-up Limit (dBm) |
|-----------------|-------------------|----------|-------|--------|---------------------|----------|--------|-------|---------------------|---------|-------|-------|---------------------|
| Tx Channel | | 9502 | 9400 | 9538 | | 1312 | 1313 | 1513 | | 4132 | 4132 | 4233 | |
| Rx Channel | | 9652 | 9400 | 9938 | 1537 | 1639 | 1738 | 4357 | 4407 | 4458 | | | |
| Frequency (MHz) | | 1852.4 | 1980 | 1907.6 | 1712.4 | 1732.6 | 1752.6 | 826.4 | 836.4 | 846.6 | | | |
| 3GPP Rel 99 | AMR 12.2kops | 11.71 | 11.76 | 11.48 | 13.00 | 13.18 | 13.21 | 13.18 | 14.00 | 20.87 | 21.13 | 21.07 | 22.00 |
| 3GPP Rel 99 | RMC 12.2kops | 11.70 | 11.79 | 11.52 | 13.00 | 13.20 | 13.23 | 13.21 | 14.00 | 20.86 | 21.16 | 21.11 | 22.00 |
| 3GPP Rel 6 | HSDPA Subtest1 | 11.07 | 10.97 | 11.12 | 12.00 | 12.02 | 11.84 | 11.85 | 13.00 | 20.17 | 20.36 | 20.41 | 21.00 |
| 3GPP Rel 6 | HSDPA Subtest2 | 11.08 | 11.30 | 11.00 | 12.00 | 11.97 | 11.87 | 11.82 | 13.00 | 20.19 | 20.35 | 20.32 | 21.00 |
| 3GPP Rel 6 | HSDPA Subtest3 | 10.53 | 10.42 | 10.59 | 11.50 | 11.47 | 11.36 | 11.38 | 12.50 | 19.68 | 19.56 | 19.90 | 20.50 |
| 3GPP Rel 6 | HSDPA Subtest4 | 10.54 | 10.74 | 10.60 | 11.50 | 11.50 | 11.42 | 11.35 | 12.50 | 19.67 | 19.67 | 19.67 | 20.50 |
| 3GPP Rel 8 | DC-HSDPA Subtest1 | 11.07 | 11.05 | 11.13 | 12.00 | 11.92 | 11.84 | 11.82 | 13.00 | 20.18 | 20.02 | 20.41 | 21.00 |
| 3GPP Rel 8 | DC-HSDPA Subtest2 | 11.05 | 11.28 | 11.07 | 12.00 | 11.95 | 11.86 | 11.84 | 13.00 | 20.18 | 20.01 | 20.38 | 21.00 |
| 3GPP Rel 8 | DC-HSDPA Subtest3 | 10.47 | 10.76 | 10.58 | 11.50 | 11.45 | 11.41 | 11.33 | 12.50 | 19.67 | 19.55 | 19.88 | 20.50 |
| 3GPP Rel 8 | DC-HSDPA Subtest4 | 10.48 | 10.75 | 10.56 | 11.50 | 11.45 | 11.44 | 11.29 | 12.50 | 19.63 | 19.51 | 19.79 | 20.50 |
| 3GPP Rel 6 | HSUPA Subtest1 | 11.19 | 11.12 | 11.21 | 12.00 | 12.11 | 12.09 | 11.84 | 13.00 | 20.17 | 20.12 | 20.46 | 21.00 |
| 3GPP Rel 6 | HSUPA Subtest2 | 9.14 | 9.19 | 9.25 | 10.00 | 10.04 | 9.99 | 9.98 | 11.00 | 18.21 | 18.22 | 18.37 | 19.00 |
| 3GPP Rel 6 | HSUPA Subtest3 | 10.20 | 10.16 | 10.27 | 11.00 | 10.89 | 10.85 | 10.71 | 12.00 | 19.13 | 19.18 | 19.35 | 20.00 |
| 3GPP Rel 6 | HSUPA Subtest4 | 9.13 | 9.22 | 9.19 | 10.00 | 9.95 | 9.89 | 9.75 | 11.00 | 18.06 | 18.24 | 18.35 | 19.00 |
| 3GPP Rel 6 | HSUPA Subtest5 | 11.17 | 11.22 | 11.35 | 12.00 | 12.10 | 11.99 | 11.90 | 13.00 | 20.03 | 20.25 | 20.34 | 21.00 |



LTE Band 2

Table with columns: BW [MHz], Modulation, RB Size, RB Offset, Power Low Ch / Freq, Power Middle Ch / Freq, Power High Ch / Freq, Tune-up limit (dBm), MPR (dB). Includes sub-headers for Channel and Frequency (MHz) with various QPSK and 16QAM configurations.

LTE Band 4

Table with columns: BW [MHz], Modulation, RB Size, RB Offset, Power Low Ch / Freq, Power Middle Ch / Freq, Power High Ch / Freq, Tune-up limit (dBm), MPR (dB). Includes sub-headers for Channel and Frequency (MHz) with various QPSK and 16QAM configurations.

LTE Band 5

Table with columns: BW [MHz], Modulation, RB Size, RB Offset, Power Low Ch / Freq, Power Middle Ch / Freq, Power High Ch / Freq, Tune-up limit (dBm), MPR (dB). Includes sub-headers for Channel and Frequency (MHz) with various QPSK and 16QAM configurations.



LTE Band 20

| Channel | Frequency (MHz) | Power Low Ch. / Freq. | Power Middle Ch. / Freq. | Power High Ch. / Freq. | Tune-up Int. (dBm) | MPR (dB) |
|-----------------|-----------------|-----------------------|--------------------------|------------------------|--------------------|----------|
| Channel 2310 | | | | | | |
| 10 | QPSK | 1 | 0 | 20.15 | 21 | 0 |
| 10 | QPSK | 1 | 25 | 20.03 | | |
| 10 | QPSK | 1 | 40 | 19.89 | | |
| 10 | QPSK | 25 | 0 | 20.11 | | |
| 10 | QPSK | 25 | 12 | 19.76 | | |
| 10 | QPSK | 25 | 25 | 19.78 | | |
| 10 | QPSK | 50 | 0 | 20.03 | | |
| 10 | ISGAM | 1 | 0 | 19.80 | | |
| 10 | ISGAM | 1 | 25 | 19.89 | | |
| 10 | ISGAM | 1 | 40 | 19.66 | | |
| 10 | ISGAM | 25 | 0 | 19.41 | | |
| 10 | ISGAM | 25 | 12 | 19.44 | | |
| 10 | ISGAM | 25 | 25 | 19.33 | | |
| 10 | ISGAM | 50 | 0 | 19.59 | | |
| 10 | ISGAM | 1 | 40 | 19.66 | | |
| 10 | ISGAM | 1 | 25 | 19.93 | | |
| 10 | ISGAM | 1 | 40 | 19.78 | | |
| 10 | ISGAM | 25 | 0 | 19.86 | | |
| 10 | ISGAM | 25 | 12 | 19.76 | | |
| 10 | ISGAM | 25 | 25 | 19.70 | | |
| 10 | ISGAM | 50 | 0 | 19.71 | | |
| Channel 2765 | | | | | | |
| Frequency (MHz) | | | | | | |
| 5 | QPSK | 1 | 0 | 20.04 | 21 | 0 |
| 5 | QPSK | 1 | 12 | 20.06 | | |
| 5 | QPSK | 1 | 24 | 19.99 | | |
| 5 | QPSK | 12 | 0 | 20.11 | | |
| 5 | QPSK | 12 | 7 | 20.03 | | |
| 5 | QPSK | 12 | 13 | 20.03 | | |
| 5 | QPSK | 25 | 0 | 20.00 | | |
| 5 | ISGAM | 1 | 0 | 19.97 | | |
| 5 | ISGAM | 1 | 12 | 19.85 | | |
| 5 | ISGAM | 1 | 24 | 19.86 | | |
| 5 | ISGAM | 12 | 0 | 20.02 | | |
| 5 | ISGAM | 12 | 7 | 20.03 | | |
| 5 | ISGAM | 12 | 13 | 20.05 | | |
| 5 | ISGAM | 25 | 0 | 20.00 | | |
| 5 | ISGAM | 25 | 12 | 19.99 | | |
| 5 | ISGAM | 25 | 25 | 19.92 | | |
| 5 | ISGAM | 50 | 0 | 20.00 | | |
| 5 | ISGAM | 50 | 12 | 20.00 | | |
| 5 | ISGAM | 50 | 25 | 20.01 | | |
| 5 | ISGAM | 50 | 39 | 20.00 | | |
| 5 | ISGAM | 75 | 0 | 19.97 | | |
| 5 | ISGAM | 75 | 12 | 19.97 | | |
| 5 | ISGAM | 75 | 25 | 19.99 | | |
| 5 | ISGAM | 75 | 39 | 19.99 | | |
| 5 | ISGAM | 100 | 0 | 19.97 | | |
| 5 | ISGAM | 100 | 12 | 19.99 | | |
| 5 | ISGAM | 100 | 25 | 19.99 | | |
| 5 | ISGAM | 100 | 39 | 19.99 | | |
| 5 | ISGAM | 100 | 50 | 19.99 | | |
| 5 | ISGAM | 100 | 63 | 19.99 | | |
| 5 | ISGAM | 100 | 75 | 19.99 | | |
| 5 | ISGAM | 100 | 87 | 19.99 | | |
| 5 | ISGAM | 100 | 100 | 19.99 | | |
| 5 | ISGAM | 100 | 113 | 19.99 | | |
| 5 | ISGAM | 100 | 125 | 19.99 | | |
| 5 | ISGAM | 100 | 138 | 19.99 | | |
| 5 | ISGAM | 100 | 150 | 19.99 | | |
| 5 | ISGAM | 100 | 163 | 19.99 | | |
| 5 | ISGAM | 100 | 175 | 19.99 | | |
| 5 | ISGAM | 100 | 188 | 19.99 | | |
| 5 | ISGAM | 100 | 200 | 19.99 | | |
| 5 | ISGAM | 100 | 213 | 19.99 | | |
| 5 | ISGAM | 100 | 225 | 19.99 | | |
| 5 | ISGAM | 100 | 238 | 19.99 | | |
| 5 | ISGAM | 100 | 250 | 19.99 | | |
| 5 | ISGAM | 100 | 263 | 19.99 | | |
| 5 | ISGAM | 100 | 275 | 19.99 | | |
| 5 | ISGAM | 100 | 288 | 19.99 | | |
| 5 | ISGAM | 100 | 300 | 19.99 | | |
| 5 | ISGAM | 100 | 313 | 19.99 | | |
| 5 | ISGAM | 100 | 325 | 19.99 | | |
| 5 | ISGAM | 100 | 338 | 19.99 | | |
| 5 | ISGAM | 100 | 350 | 19.99 | | |
| 5 | ISGAM | 100 | 363 | 19.99 | | |
| 5 | ISGAM | 100 | 375 | 19.99 | | |
| 5 | ISGAM | 100 | 388 | 19.99 | | |
| 5 | ISGAM | 100 | 400 | 19.99 | | |
| 5 | ISGAM | 100 | 413 | 19.99 | | |
| 5 | ISGAM | 100 | 425 | 19.99 | | |
| 5 | ISGAM | 100 | 438 | 19.99 | | |
| 5 | ISGAM | 100 | 450 | 19.99 | | |
| 5 | ISGAM | 100 | 463 | 19.99 | | |
| 5 | ISGAM | 100 | 475 | 19.99 | | |
| 5 | ISGAM | 100 | 488 | 19.99 | | |
| 5 | ISGAM | 100 | 500 | 19.99 | | |
| 5 | ISGAM | 100 | 513 | 19.99 | | |
| 5 | ISGAM | 100 | 525 | 19.99 | | |
| 5 | ISGAM | 100 | 538 | 19.99 | | |
| 5 | ISGAM | 100 | 550 | 19.99 | | |
| 5 | ISGAM | 100 | 563 | 19.99 | | |
| 5 | ISGAM | 100 | 575 | 19.99 | | |
| 5 | ISGAM | 100 | 588 | 19.99 | | |
| 5 | ISGAM | 100 | 600 | 19.99 | | |
| 5 | ISGAM | 100 | 613 | 19.99 | | |
| 5 | ISGAM | 100 | 625 | 19.99 | | |
| 5 | ISGAM | 100 | 638 | 19.99 | | |
| 5 | ISGAM | 100 | 650 | 19.99 | | |
| 5 | ISGAM | 100 | 663 | 19.99 | | |
| 5 | ISGAM | 100 | 675 | 19.99 | | |
| 5 | ISGAM | 100 | 688 | 19.99 | | |
| 5 | ISGAM | 100 | 700 | 19.99 | | |
| 5 | ISGAM | 100 | 713 | 19.99 | | |
| 5 | ISGAM | 100 | 725 | 19.99 | | |
| 5 | ISGAM | 100 | 738 | 19.99 | | |
| 5 | ISGAM | 100 | 750 | 19.99 | | |
| 5 | ISGAM | 100 | 763 | 19.99 | | |
| 5 | ISGAM | 100 | 775 | 19.99 | | |
| 5 | ISGAM | 100 | 788 | 19.99 | | |
| 5 | ISGAM | 100 | 800 | 19.99 | | |
| 5 | ISGAM | 100 | 813 | 19.99 | | |
| 5 | ISGAM | 100 | 825 | 19.99 | | |
| 5 | ISGAM | 100 | 838 | 19.99 | | |
| 5 | ISGAM | 100 | 850 | 19.99 | | |
| 5 | ISGAM | 100 | 863 | 19.99 | | |
| 5 | ISGAM | 100 | 875 | 19.99 | | |
| 5 | ISGAM | 100 | 888 | 19.99 | | |
| 5 | ISGAM | 100 | 900 | 19.99 | | |
| 5 | ISGAM | 100 | 913 | 19.99 | | |
| 5 | ISGAM | 100 | 925 | 19.99 | | |
| 5 | ISGAM | 100 | 938 | 19.99 | | |
| 5 | ISGAM | 100 | 950 | 19.99 | | |
| 5 | ISGAM | 100 | 963 | 19.99 | | |
| 5 | ISGAM | 100 | 975 | 19.99 | | |
| 5 | ISGAM | 100 | 988 | 19.99 | | |
| 5 | ISGAM | 100 | 1000 | 19.99 | | |
| 5 | ISGAM | 100 | 1013 | 19.99 | | |
| 5 | ISGAM | 100 | 1025 | 19.99 | | |
| 5 | ISGAM | 100 | 1038 | 19.99 | | |
| 5 | ISGAM | 100 | 1050 | 19.99 | | |
| 5 | ISGAM | 100 | 1063 | 19.99 | | |
| 5 | ISGAM | 100 | 1075 | 19.99 | | |
| 5 | ISGAM | 100 | 1088 | 19.99 | | |
| 5 | ISGAM | 100 | 1100 | 19.99 | | |
| 5 | ISGAM | 100 | 1113 | 19.99 | | |
| 5 | ISGAM | 100 | 1125 | 19.99 | | |
| 5 | ISGAM | 100 | 1138 | 19.99 | | |
| 5 | ISGAM | 100 | 1150 | 19.99 | | |
| 5 | ISGAM | 100 | 1163 | 19.99 | | |
| 5 | ISGAM | 100 | 1175 | 19.99 | | |
| 5 | ISGAM | 100 | 1188 | 19.99 | | |
| 5 | ISGAM | 100 | 1200 | 19.99 | | |
| 5 | ISGAM | 100 | 1213 | 19.99 | | |
| 5 | ISGAM | 100 | 1225 | 19.99 | | |
| 5 | ISGAM | 100 | 1238 | 19.99 | | |
| 5 | ISGAM | 100 | 1250 | 19.99 | | |
| 5 | ISGAM | 100 | 1263 | 19.99 | | |
| 5 | ISGAM | 100 | 1275 | 19.99 | | |
| 5 | ISGAM | 100 | 1288 | 19.99 | | |
| 5 | ISGAM | 100 | 1300 | 19.99 | | |
| 5 | ISGAM | 100 | 1313 | 19.99 | | |
| 5 | ISGAM | 100 | 1325 | 19.99 | | |
| 5 | ISGAM | 100 | 1338 | 19.99 | | |
| 5 | ISGAM | 100 | 1350 | 19.99 | | |
| 5 | ISGAM | 100 | 1363 | 19.99 | | |
| 5 | ISGAM | 100 | 1375 | 19.99 | | |
| 5 | ISGAM | 100 | 1388 | 19.99 | | |
| 5 | ISGAM | 100 | 1400 | 19.99 | | |
| 5 | ISGAM | 100 | 1413 | 19.99 | | |
| 5 | ISGAM | 100 | 1425 | 19.99 | | |
| 5 | ISGAM | 100 | 1438 | 19.99 | | |
| 5 | ISGAM | 100 | 1450 | 19.99 | | |
| 5 | ISGAM | 100 | 1463 | 19.99 | | |
| 5 | ISGAM | 100 | 1475 | 19.99 | | |
| 5 | ISGAM | 100 | 1488 | 19.99 | | |
| 5 | ISGAM | 100 | 1500 | 19.99 | | |
| 5 | ISGAM | 100 | 1513 | 19.99 | | |
| 5 | ISGAM | 100 | 1525 | 19.99 | | |
| 5 | ISGAM | 100 | 1538 | 19.99 | | |
| 5 | ISGAM | 100 | 1550 | 19.99 | | |
| 5 | ISGAM | 100 | 1563 | 19.99 | | |
| 5 | ISGAM | 100 | 1575 | 19.99 | | |
| 5 | ISGAM | 100 | 1588 | 19.99 | | |
| 5 | ISGAM | 100 | 1600 | 19.99 | | |
| 5 | ISGAM | 100 | 1613 | 19.99 | | |
| 5 | ISGAM | 100 | 1625 | 19.99 | | |
| 5 | ISGAM | 100 | 1638 | 19.99 | | |
| 5 | ISGAM | 100 | 1650 | 19.99 | | |
| 5 | ISGAM | 100 | 1663 | 19.99 | | |
| 5 | ISGAM | 100 | 1675 | 19.99 | | |
| 5 | ISGAM | 100 | 1688 | 19.99 | | |
| 5 | ISGAM | 100 | 1700 | 19.99 | | |
| 5 | ISGAM | 100 | 1713 | 19.99 | | |
| 5 | ISGAM | 100 | 1725 | 19.99 | | |
| 5 | ISGAM | 100 | 1738 | 19.99 | | |
| 5 | ISGAM | 100 | 1750 | 19.99 | | |
| 5 | ISGAM | 100 | 1763 | 19.99 | | |
| 5 | ISGAM | 100 | 1775 | 19.99 | | |
| 5 | ISGAM | 100 | 1788 | 19.99 | | |
| 5 | ISGAM | 100 | 1800 | 19.99 | | |
| 5 | ISGAM | 100 | 1813 | 19.99 | | |
| 5 | ISGAM | 100 | 1825 | 19.99 | | |
| 5 | ISGAM | 100 | 1838 | 19.99 | | |
| 5 | ISGAM | 100 | 1850 | 19.99 | | |
| 5 | ISGAM | 100 | 1863 | 19.99 | | |
| 5 | ISGAM | 100 | 1875 | 19.99 | | |
| 5 | ISGAM | 100 | 1888 | 19.99 | | |
| 5 | ISGAM | 100 | 1900 | 19.99 | | |
| 5 | ISGAM | 100 | 1913 | 19.99 | | |
| 5 | ISGAM | 100 | 1925 | 19.99 | | |
| 5 | ISGAM | 100 | 1938 | 19.99 | | |
| 5 | ISGAM | 100 | 1950 | 19.99 | | |
| 5 | ISGAM | 100 | 1963 | 19.99 | | |
| 5 | ISGAM | 100 | 1975 | 19.99 | | |
| 5 | ISGAM | 100 | 1988 | 19.99 | | |
| 5 | ISGAM | 100 | 2000 | 19.99 | | |
| 5 | ISGAM | 100 | 2013 | 19.99 | | |
| 5 | ISGAM | 100 | 2025 | 19.99 | | |
| 5 | ISGAM | 100 | 2038 | 19.99 | | |
| 5 | ISGAM | 100 | 2050 | 19.99 | | |
| 5 | ISGAM | 100 | 2063 | 19.99 | | |
| 5 | ISGAM | 100 | 2075 | 19.99 | | |
| 5 | ISGAM | 100 | 2088 | 19.99 | | |
| 5 | ISGAM | 100 | 2100 | 19.99 | | |
| 5 | ISGAM | 100 | 2113 | 19.99 | | |
| 5 | ISGAM | 100 | 2125 | 19.99 | | |
| 5 | ISGAM | 100 | 2138 | 19.99 | | |
| 5 | ISGAM | 100 | 2150 | 19.99 | | |
| 5 | ISGAM | 100 | 2163 | 19.99 | | |
| 5 | ISGAM | 100 | 2175 | 19.99 | | |
| 5 | ISGAM | 100 | 2188 | 19.99 | | |
| 5 | ISGAM | 100 | 2200 | 19.99 | | |
| 5 | ISGAM | 100 | 2213 | 19.99 | | |
| 5 | ISGAM | 100 | 2225 | 19.99 | | |
| 5 | ISGAM | 100 | 2238 | 19.99 | | |
| 5 | ISGAM | 100 | 2250 | 19.99 | | |
| 5 | ISGAM | 100 | 2263 | 19.99 | | |
| 5 | ISGAM | 100 | 2275 | 19.99 | | |
| 5 | ISGAM | 100 | 2288 | 19.99 | | |
| 5 | ISGAM | 100 | 2300 | 19.99 | | |
| 5 | ISGAM | 100 | 2313 | 19.99 | | |
| 5 | ISGAM | 100 | 2325 | | | |



Reduced Power Mode for Handheld On

| Band | TX Channel | WCDMA II | | | Turn-up Limit (dBm) | WCDMA IV | | | Turn-up Limit (dBm) |
|-----------------|--------------------|----------|-------|--------|---------------------|----------|--------|-------|---------------------|
| | | 5262 | 9400 | 9538 | | 1312 | 1413 | 1513 | |
| Rx Channel | | 8662 | 9600 | 9938 | 1537 | 1638 | 1738 | | |
| Frequency (MHz) | | 1822.4 | 1880 | 1937.3 | 1712.4 | 1722.3 | 1722.6 | | |
| 3GPP Rel 99 | AMR 12.2Kbps | 17.55 | 17.58 | 17.17 | 19.00 | 19.75 | 19.81 | 19.53 | 20.50 |
| 3GPP Rel 99 | RMK 12.2Kbps | 17.58 | 17.59 | 17.23 | 19.00 | 19.77 | 19.82 | 19.60 | 20.50 |
| 3GPP Rel 6 | HSDPA Subtest-1 | 16.96 | 16.82 | 16.91 | 18.00 | 18.12 | 17.98 | 18.02 | 19.50 |
| 3GPP Rel 6 | HSDPA Subtest-2 | 16.91 | 17.13 | 16.81 | 18.00 | 18.07 | 18.03 | 17.99 | 19.50 |
| 3GPP Rel 6 | HSDPA Subtest-3 | 16.34 | 16.28 | 16.38 | 17.50 | 17.57 | 17.50 | 17.55 | 19.00 |
| 3GPP Rel 6 | HSDPA Subtest-4 | 16.45 | 16.57 | 16.45 | 17.50 | 17.60 | 17.56 | 17.52 | 19.00 |
| 3GPP Rel 8 | DC-HSDPA Subtest-1 | 17.00 | 16.87 | 16.94 | 18.00 | 18.10 | 17.98 | 17.99 | 19.50 |
| 3GPP Rel 8 | DC-HSDPA Subtest-2 | 16.94 | 17.10 | 16.86 | 18.00 | 18.05 | 18.00 | 18.01 | 19.50 |
| 3GPP Rel 8 | DC-HSDPA Subtest-3 | 16.36 | 16.80 | 16.37 | 17.50 | 17.55 | 17.55 | 17.50 | 19.00 |
| 3GPP Rel 8 | DC-HSDPA Subtest-4 | 16.40 | 16.59 | 16.43 | 17.50 | 17.55 | 17.58 | 17.46 | 19.00 |
| 3GPP Rel 6 | HSUPA Subtest-1 | 17.07 | 16.99 | 17.02 | 18.00 | 18.21 | 18.23 | 18.01 | 19.50 |
| 3GPP Rel 6 | HSUPA Subtest-2 | 15.06 | 15.04 | 15.09 | 16.00 | 16.14 | 16.13 | 16.13 | 17.50 |
| 3GPP Rel 6 | HSUPA Subtest-3 | 15.09 | 15.04 | 15.09 | 17.00 | 16.99 | 16.99 | 16.98 | 16.50 |
| 3GPP Rel 6 | HSUPA Subtest-4 | 15.09 | 15.09 | 15.03 | 16.00 | 16.05 | 16.03 | 15.92 | 17.50 |
| 3GPP Rel 6 | HSUPA Subtest-5 | 17.10 | 17.06 | 17.20 | 18.00 | 18.20 | 18.13 | 18.07 | 19.50 |



LTE Band 2

| BW (MHz) | Modulation | RB Size | RB Offset | Power | | | Turn-up limit (dBm) | MPR (dB) |
|-----------------|------------|---------|-----------|---------------|------------------|----------------|---------------------|----------|
| | | | | Low Ch / Freq | Middle Ch / Freq | High Ch / Freq | | |
| Channel | | | | | | | | |
| Frequency (MHz) | | | | | | | | |
| 20 | QPSK | 1 | 0 | 19.23 | 19.32 | 19.17 | 20 | 0 |
| 20 | QPSK | 1 | 49 | 19.10 | 19.01 | 19.02 | | |
| 20 | QPSK | 1 | 99 | 19.03 | 19.03 | 19.01 | | |
| 20 | QPSK | 50 | 0 | 19.14 | 19.14 | 19.07 | | |
| 20 | QPSK | 50 | 24 | 19.08 | 19.00 | 19.05 | | |
| 20 | QPSK | 50 | 50 | 19.00 | 19.00 | 19.04 | | |
| 20 | QPSK | 100 | 0 | 19.10 | 19.08 | 19.07 | | |
| 20 | 16QAM | 1 | 0 | 19.06 | 19.00 | 19.05 | | |
| 20 | 16QAM | 1 | 49 | 19.06 | 19.08 | 19.01 | | |
| 20 | 16QAM | 1 | 99 | 19.03 | 19.03 | 19.01 | | |
| 20 | 16QAM | 50 | 0 | 19.03 | 19.00 | 19.08 | | |
| 20 | 16QAM | 50 | 24 | 19.07 | 19.07 | 19.04 | | |
| 20 | 16QAM | 50 | 50 | 19.06 | 19.00 | 19.05 | | |
| 20 | 16QAM | 100 | 0 | 19.03 | 19.06 | 19.00 | | |
| 20 | 64QAM | 1 | 0 | 19.08 | 19.01 | 19.11 | | |
| 20 | 64QAM | 1 | 49 | 19.07 | 19.07 | 19.12 | | |
| 20 | 64QAM | 1 | 99 | 19.01 | 19.08 | 19.04 | | |
| 20 | 64QAM | 50 | 0 | 19.04 | 19.02 | 19.07 | | |
| 20 | 64QAM | 50 | 24 | 19.08 | 19.09 | 19.03 | | |
| 20 | 64QAM | 50 | 50 | 19.06 | 19.07 | 19.07 | | |
| 20 | 64QAM | 100 | 0 | 19.01 | 19.03 | 19.07 | | |
| Channel | | | | | | | | |
| Frequency (MHz) | | | | | | | | |
| 15 | QPSK | 1 | 0 | 19.79 | 19.85 | 19.84 | 20 | 0 |
| 15 | QPSK | 1 | 37 | 19.83 | 19.70 | 19.76 | | |
| 15 | QPSK | 1 | 74 | 19.12 | 19.11 | 19.11 | | |
| 15 | QPSK | 36 | 0 | 19.00 | 19.03 | 19.01 | | |
| 15 | QPSK | 36 | 20 | 19.02 | 19.01 | 19.08 | | |
| 15 | QPSK | 36 | 39 | 19.03 | 19.06 | 19.08 | | |
| 15 | QPSK | 75 | 0 | 19.06 | 19.03 | 19.05 | | |
| 15 | 16QAM | 1 | 0 | 19.00 | 19.03 | 19.03 | | |
| 15 | 16QAM | 1 | 37 | 19.04 | 19.07 | 19.01 | | |
| 15 | 16QAM | 1 | 74 | 19.07 | 19.03 | 19.10 | | |
| 15 | 16QAM | 36 | 0 | 19.06 | 19.02 | 19.01 | | |
| 15 | 16QAM | 36 | 20 | 19.06 | 19.02 | 19.00 | | |
| 15 | 16QAM | 36 | 39 | 19.02 | 19.06 | 19.04 | | |
| 15 | 16QAM | 75 | 0 | 19.01 | 19.00 | 19.04 | | |
| 15 | 64QAM | 1 | 0 | 19.03 | 19.02 | 19.01 | | |
| 15 | 64QAM | 1 | 37 | 19.03 | 19.03 | 19.01 | | |
| 15 | 64QAM | 1 | 74 | 19.02 | 19.08 | 19.01 | | |
| 15 | 64QAM | 36 | 0 | 19.02 | 19.08 | 19.01 | | |
| 15 | 64QAM | 36 | 20 | 19.07 | 19.06 | 19.06 | | |
| 15 | 64QAM | 36 | 39 | 19.06 | 19.01 | 19.08 | | |
| 15 | 64QAM | 75 | 0 | 19.00 | 19.02 | 19.06 | | |
| Channel | | | | | | | | |
| Frequency (MHz) | | | | | | | | |
| 10 | QPSK | 1 | 0 | 19.79 | 19.88 | 19.84 | 20 | 0 |
| 10 | QPSK | 1 | 25 | 19.89 | 19.97 | 19.82 | | |
| 10 | QPSK | 1 | 49 | 19.06 | 19.05 | 19.07 | | |
| 10 | QPSK | 25 | 0 | 19.08 | 19.05 | 19.01 | | |
| 10 | QPSK | 25 | 12 | 19.02 | 19.00 | 19.07 | | |
| 10 | QPSK | 25 | 25 | 19.03 | 19.05 | 19.04 | | |
| 10 | QPSK | 50 | 0 | 19.02 | 19.08 | 19.03 | | |
| 10 | 16QAM | 1 | 0 | 19.00 | 19.03 | 19.01 | | |
| 10 | 16QAM | 1 | 25 | 19.14 | 19.14 | 19.00 | | |
| 10 | 16QAM | 1 | 49 | 19.09 | 19.02 | 19.07 | | |
| 10 | 16QAM | 25 | 0 | 19.07 | 19.03 | 19.02 | | |
| 10 | 16QAM | 25 | 12 | 19.07 | 19.00 | 19.08 | | |
| 10 | 16QAM | 25 | 25 | 19.04 | 19.05 | 19.06 | | |
| 10 | 16QAM | 50 | 0 | 19.00 | 19.08 | 19.04 | | |
| 10 | 64QAM | 1 | 0 | 19.01 | 19.09 | 19.06 | | |
| 10 | 64QAM | 1 | 25 | 19.03 | 19.05 | 19.04 | | |
| 10 | 64QAM | 1 | 49 | 19.12 | 19.03 | 19.00 | | |
| 10 | 64QAM | 25 | 0 | 19.04 | 19.05 | 19.00 | | |
| 10 | 64QAM | 25 | 12 | 19.05 | 19.01 | 19.07 | | |
| 10 | 64QAM | 25 | 25 | 19.02 | 19.02 | 19.06 | | |
| 10 | 64QAM | 50 | 0 | 19.03 | 19.06 | 19.00 | | |
| Channel | | | | | | | | |
| Frequency (MHz) | | | | | | | | |
| 5 | QPSK | 1 | 0 | 19.01 | 19.72 | 19.75 | 20 | 0 |
| 5 | QPSK | 1 | 12 | 19.83 | 19.72 | 19.64 | | |
| 5 | QPSK | 1 | 24 | 19.62 | 19.70 | 19.73 | | |
| 5 | QPSK | 12 | 0 | 19.05 | 19.05 | 19.00 | | |
| 5 | QPSK | 12 | 7 | 19.07 | 19.06 | 19.07 | | |
| 5 | QPSK | 12 | 13 | 19.06 | 19.01 | 19.04 | | |
| 5 | QPSK | 25 | 0 | 19.00 | 19.01 | 19.02 | | |
| 5 | 16QAM | 1 | 0 | 19.04 | 19.07 | 19.04 | | |
| 5 | 16QAM | 1 | 12 | 19.08 | 19.01 | 19.02 | | |
| 5 | 16QAM | 1 | 24 | 19.00 | 19.07 | 19.04 | | |
| 5 | 16QAM | 12 | 0 | 19.02 | 19.09 | 19.07 | | |
| 5 | 16QAM | 12 | 7 | 19.07 | 19.04 | 19.06 | | |
| 5 | 16QAM | 12 | 13 | 19.02 | 19.03 | 19.05 | | |
| 5 | 16QAM | 25 | 0 | 19.04 | 19.00 | 19.01 | | |
| 5 | 64QAM | 1 | 0 | 19.03 | 19.07 | 19.03 | | |
| 5 | 64QAM | 1 | 12 | 19.06 | 19.01 | 19.05 | | |
| 5 | 64QAM | 1 | 24 | 19.04 | 19.07 | 19.04 | | |
| 5 | 64QAM | 12 | 0 | 19.02 | 19.05 | 19.05 | | |
| 5 | 64QAM | 12 | 7 | 19.06 | 19.09 | 19.05 | | |
| 5 | 64QAM | 12 | 13 | 19.03 | 19.03 | 19.06 | | |
| 5 | 64QAM | 25 | 0 | 19.07 | 19.05 | 19.06 | | |
| Channel | | | | | | | | |
| Frequency (MHz) | | | | | | | | |
| 3 | QPSK | 1 | 0 | 19.65 | 19.68 | 19.78 | 20 | 0 |
| 3 | QPSK | 1 | 8 | 19.83 | 19.86 | 19.77 | | |
| 3 | QPSK | 1 | 14 | 19.99 | 19.86 | 19.72 | | |
| 3 | QPSK | 8 | 0 | 19.80 | 19.89 | 19.76 | | |
| 3 | QPSK | 8 | 4 | 19.89 | 19.91 | 19.72 | | |
| 3 | QPSK | 8 | 7 | 19.79 | 19.89 | 19.72 | | |
| 3 | QPSK | 15 | 0 | 19.89 | 19.86 | 19.76 | | |
| 3 | 16QAM | 1 | 0 | 19.87 | 19.93 | 19.86 | | |
| 3 | 16QAM | 1 | 8 | 19.02 | 19.14 | 19.71 | | |
| 3 | 16QAM | 1 | 14 | 19.07 | 19.05 | 19.82 | | |
| 3 | 16QAM | 8 | 0 | 19.07 | 19.02 | 19.88 | | |
| 3 | 16QAM | 8 | 4 | 19.06 | 19.06 | 19.84 | | |
| 3 | 16QAM | 8 | 7 | 19.02 | 19.07 | 19.88 | | |
| 3 | 16QAM | 15 | 0 | 19.05 | 19.79 | 19.67 | | |
| 3 | 64QAM | 1 | 0 | 19.01 | 19.12 | 19.98 | | |
| 3 | 64QAM | 1 | 8 | 19.02 | 19.01 | 19.93 | | |
| 3 | 64QAM | 1 | 14 | 19.02 | 19.00 | 19.01 | | |
| 3 | 64QAM | 8 | 0 | 19.07 | 19.07 | 19.72 | | |
| 3 | 64QAM | 8 | 4 | 19.06 | 19.06 | 19.68 | | |
| 3 | 64QAM | 8 | 7 | 19.03 | 19.03 | 19.54 | | |
| 3 | 64QAM | 15 | 0 | 19.88 | 19.83 | 19.77 | | |
| Channel | | | | | | | | |
| Frequency (MHz) | | | | | | | | |
| 1.4 | QPSK | 1 | 0 | 19.93 | 19.91 | 19.84 | 20 | 0 |
| 1.4 | QPSK | 1 | 3 | 19.80 | 19.96 | 19.86 | | |
| 1.4 | QPSK | 1 | 5 | 19.84 | 19.88 | 19.50 | | |
| 1.4 | QPSK | 3 | 0 | 19.79 | 19.75 | 19.69 | | |
| 1.4 | QPSK | 3 | 1 | 19.88 | 19.82 | 19.73 | | |
| 1.4 | QPSK | 3 | 3 | 19.77 | 19.77 | 19.65 | | |
| 1.4 | QPSK | 6 | 0 | 19.79 | 19.76 | 19.67 | | |
| 1.4 | 16QAM | 1 | 0 | 19.99 | 19.02 | 19.14 | | |
| 1.4 | 16QAM | 1 | 3 | 19.02 | 19.90 | 19.00 | | |
| 1.4 | 16QAM | 1 | 5 | 19.09 | 19.82 | 19.00 | | |
| 1.4 | 16QAM | 3 | 0 | 19.84 | 19.81 | 19.59 | | |
| 1.4 | 16QAM | 3 | 1 | 19.84 | 19.03 | 19.03 | | |
| 1.4 | 16QAM | 3 | 3 | 19.77 | 19.03 | 19.72 | | |
| 1.4 | 16QAM | 6 | 0 | 19.83 | 19.79 | 19.83 | | |
| 1.4 | 64QAM | 1 | 0 | 19.01 | 19.05 | 19.96 | | |
| 1.4 | 64QAM | 1 | 3 | 19.01 | 19.03 | 19.06 | | |
| 1.4 | 64QAM | 1 | 5 | 19.01 | 19.91 | 19.98 | | |
| 1.4 | 64QAM | 3 | 0 | 19.96 | 19.96 | 19.80 | | |
| 1.4 | 64QAM | 3 | 1 | 19.88 | 19.00 | 19.94 | | |
| 1.4 | 64QAM | 3 | 3 | 19.05 | 19.02 | 19.70 | | |
| 1.4 | 64QAM | 6 | 0 | 19.84 | 19.87 | 19.72 | | |

LTE Band 4

| BW (MHz) | Modulation | RB Size | RB Offset | Power | | | Turn-up limit (dBm) | MPR (dB) |
|-----------------|------------|---------|-----------|---------------|------------------|----------------|---------------------|----------|
| | | | | Low Ch / Freq | Middle Ch / Freq | High Ch / Freq | | |
| Channel | | | | | | | | |
| Frequency (MHz) | | | | | | | | |
| 20 | QPSK | 1 | 0 | 19.65 | 19.66 | 19.49 | 20 | 0 |
| 20 | QPSK | 1 | 49 | 19.33 | 19.30 | 19.35 | | |
| 20 | QPSK | 1 | 99 | 19.30 | 19.36 | 19.23 | | |
| 20 | QPSK | 50 | 0 | 19.33 | 19.42 | 19.34 | | |
| 20 | QPSK | 50 | 24 | 19.30 | 19.22 | 19.39 | | |
| 20 | QPSK | 50 | 50 | 19.19 | 19.23 | 19.17 | | |
| 20 | QPSK | 100 | 0 | 19.19 | 19.32 | 19.33 | | |
| 20 | 16QAM | 1 | 0 | 19.28 | 19.35 | 19.31 | | |
| 20 | 16QAM | 1 | 49 | 19.32 | 19.26 | 19.47 | | |
| 20 | 16QAM | 1 | 99 | 19.45 | 19.29 | 19.48 | | |
| 20 | 16QAM | 50 | 0 | 19.27 | 19.20 | 19.16 | | |
| 20 | 16QAM | 50 | 24 | 19.08 | 19.08 | 19.15 | | |
| 20 | 16QAM | 50 | 50 | 19.01 | 19.24 | 19.27 | | |
| 20 | 16QAM | 100 | 0 | 19.22 | 19.12 | 19.11 | | |
| 20 | 64QAM | 1 | 0 | 19.07 | 19.02 | 19.27 | | |
| 20 | 64QAM | 1 | 49 | 19.94 | 19.26 | 19.02 | | |
| 20 | 64QAM | 1 | 99 | 19.12 | 19.02 | 19.14 | | |
| 20 | 64QAM | 50 | 0 | 19.12 | 19.16 | 19.12 | | |
| 20 | 64QAM | 50 | 24 | 19.03 | 19.03 | 19.09 | | |
| 20 | 64QAM | 50 | 50 | 19.07 | 19.01 | 19.02 | | |
| 20 | 64QAM | 100 | 0 | 19.06 | 19.11 | 19.07 | | |
| Channel | | | | | | | | |
| Frequency (MHz) | | | | | | | | |
| 15 | QPSK | 1 | 0 | 19.30 | 19.19 | 19.51 | 20 | 0 |
| 15 | QPSK | 1 | 37 | 19.21 | 19.52 | 19.44 | | |
| 15 | QPSK | 1 | 74 | 19.49 | 19.43 | 19.63 | | |
| 15 | QPSK | 36 | 0 | 19.53 | 19.47 | 19.61 | | |
| 15 | QPSK | 36 | 20 | 19.32 | 19.49 | 19.41 | | |
| 15 | QPSK | 36 | 39 | 19.28 | 19.54 | 19.31 | | |
| 15 | QPSK | 75 | 0 | 19.30 | 19.28 | 19.42 | | |
| 15 | 16QAM | 1 | 0 | 19.62 | 19.54 | 19.62 | | |
| 15 | 16QAM | 1 | 37 | 19.53 | 19.56 | 19.51 | | |
| 15 | 16QAM | 1 | 74 | 19.49 | 19.41 | 19.41 | | |
| 15 | 16QAM | 36 | 0 | 19.40 | 19.51 | 19.50 | | |



LTE Band 30

| BW [MHz] | Modulation | RB Size | RB Offset | Power Low Ch / Freq | Power Middle Ch / Freq | Power High Ch / Freq | Tune-up limit (dBm) | MFR (dB) | | |
|-----------------|------------|---------|-----------|---------------------|------------------------|----------------------|---------------------|----------|--|--|
| Channel | | | | | | | | | | |
| Frequency (MHz) | | | | | | | | | | |
| 10 | QPSK | 1 | 0 | | 21.83 | | 22.5 | 0 | | |
| 10 | QPSK | 1 | 25 | | 21.71 | | | | | |
| 10 | QPSK | 1 | 49 | | 21.67 | | | | | |
| 10 | QPSK | 25 | 0 | | 21.47 | | 22.5 | 0 | | |
| 10 | QPSK | 25 | 12 | | 21.44 | | | | | |
| 10 | QPSK | 25 | 25 | | 21.41 | | | | | |
| 10 | QPSK | 50 | 0 | | 21.61 | | 22.5 | 0 | | |
| 10 | 16QAM | 1 | 0 | | 21.48 | | | | | |
| 10 | 16QAM | 1 | 25 | | 21.37 | | | | | |
| 10 | 16QAM | 1 | 49 | | 21.34 | | 22.5 | 0 | | |
| 10 | 16QAM | 25 | 0 | | 20.59 | | | | | |
| 10 | 16QAM | 25 | 12 | | 20.62 | | | | | |
| 10 | 16QAM | 25 | 25 | | 20.51 | | 22 | 0.5 | | |
| 10 | 16QAM | 50 | 0 | | 20.54 | | | | | |
| 10 | 16QAM | 50 | 0 | | 20.54 | | | | | |
| 10 | 64QAM | 1 | 0 | | 21.07 | | 22 | 0.5 | | |
| 10 | 64QAM | 1 | 25 | | 21.11 | | | | | |
| 10 | 64QAM | 1 | 49 | | 20.96 | | | | | |
| 10 | 64QAM | 25 | 0 | | 20.04 | | 21 | 1.5 | | |
| 10 | 64QAM | 25 | 12 | | 19.94 | | | | | |
| 10 | 64QAM | 25 | 25 | | 19.88 | | | | | |
| 10 | 64QAM | 50 | 0 | | 19.89 | | 21 | 1.5 | | |
| Channel | | | | | | | | | | |
| Frequency (MHz) | | | | | | | | | | |
| 5 | QPSK | 1 | 0 | 21.61 | 21.74 | 21.70 | 22.5 | 0 | | |
| 5 | QPSK | 1 | 12 | 21.67 | 21.60 | 21.65 | | | | |
| 5 | QPSK | 1 | 24 | 21.56 | 21.74 | 21.56 | | | | |
| 5 | QPSK | 12 | 0 | 21.72 | 21.60 | 21.66 | 22.5 | 0 | | |
| 5 | QPSK | 12 | 7 | 21.60 | 21.59 | 21.60 | | | | |
| 5 | QPSK | 12 | 13 | 21.60 | 21.54 | 21.53 | | | | |
| 5 | QPSK | 25 | 0 | 21.61 | 21.63 | 21.67 | 22.5 | 0 | | |
| 5 | 16QAM | 1 | 0 | 21.54 | 21.63 | 21.60 | | | | |
| 5 | 16QAM | 1 | 12 | 21.46 | 21.73 | 21.58 | | | | |
| 5 | 16QAM | 1 | 24 | 21.54 | 21.71 | 21.61 | 22 | 0.5 | | |
| 5 | 16QAM | 12 | 0 | 21.13 | 21.20 | 21.08 | | | | |
| 5 | 16QAM | 12 | 7 | 21.12 | 21.10 | 21.09 | | | | |
| 5 | 16QAM | 12 | 13 | 21.14 | 21.03 | 21.16 | 22 | 0.5 | | |
| 5 | 16QAM | 25 | 0 | 21.11 | 21.07 | 21.09 | | | | |
| 5 | 64QAM | 1 | 0 | 21.23 | 21.08 | 21.07 | | | | |
| 5 | 64QAM | 1 | 12 | 21.09 | 21.11 | 21.09 | 21 | 1.5 | | |
| 5 | 64QAM | 1 | 24 | 21.17 | 21.20 | 21.06 | | | | |
| 5 | 64QAM | 12 | 0 | 20.28 | 20.20 | 20.13 | | | | |
| 5 | 64QAM | 12 | 7 | 20.24 | 20.14 | 20.08 | 21 | 1.5 | | |
| 5 | 64QAM | 12 | 13 | 20.21 | 20.15 | 20.07 | | | | |
| 5 | 64QAM | 25 | 0 | 20.21 | 20.10 | 20.15 | | | | |

LTE Band 66

| BW [MHz] | Modulation | RB Size | RB Offset | Power Low Ch / Freq | Power Middle Ch / Freq | Power High Ch / Freq | Tune-up limit (dBm) | MFR (dB) |
|-----------------|------------|---------|-----------|---------------------|------------------------|----------------------|---------------------|----------|
| Channel | | | | | | | | |
| Frequency (MHz) | | | | | | | | |
| 20 | QPSK | 1 | 0 | 19.26 | 19.33 | 19.27 | 20 | 0 |
| 20 | QPSK | 1 | 49 | 19.13 | 19.20 | 19.16 | | |
| 20 | QPSK | 1 | 99 | 18.99 | 19.01 | 19.14 | | |
| 20 | QPSK | 50 | 0 | 19.14 | 19.22 | 19.11 | 20 | 0 |
| 20 | QPSK | 50 | 24 | 18.93 | 18.96 | 19.01 | | |
| 20 | QPSK | 50 | 50 | 19.00 | 19.00 | 18.99 | | |
| 20 | 16QAM | 1 | 0 | 18.87 | 18.87 | 18.88 | 20 | 0 |
| 20 | 16QAM | 1 | 49 | 18.96 | 18.95 | 19.00 | | |
| 20 | 16QAM | 1 | 99 | 19.17 | 19.26 | 19.11 | | |
| 20 | 16QAM | 50 | 0 | 18.67 | 18.80 | 18.95 | 20 | 0 |
| 20 | 16QAM | 50 | 24 | 18.77 | 18.83 | 19.00 | | |
| 20 | 16QAM | 50 | 50 | 18.91 | 18.94 | 18.87 | | |
| 20 | 16QAM | 100 | 0 | 18.80 | 18.76 | 18.88 | 20 | 0 |
| 20 | 64QAM | 1 | 0 | 19.12 | 19.13 | 19.15 | | |
| 20 | 64QAM | 1 | 49 | 19.02 | 19.10 | 19.02 | | |
| 20 | 64QAM | 1 | 99 | 19.05 | 18.99 | 19.06 | 20 | 0 |
| 20 | 64QAM | 50 | 0 | 18.69 | 18.76 | 18.79 | | |
| 20 | 64QAM | 50 | 24 | 18.81 | 18.92 | 18.90 | | |
| 20 | 64QAM | 50 | 50 | 18.81 | 18.87 | 18.92 | 20 | 0 |
| 20 | 64QAM | 100 | 0 | 18.82 | 18.91 | 18.78 | | |
| Channel | | | | | | | | |
| Frequency (MHz) | | | | | | | | |
| 15 | QPSK | 1 | 0 | 18.93 | 19.18 | 18.95 | 20 | 0 |
| 15 | QPSK | 1 | 37 | 18.93 | 18.96 | 18.94 | | |
| 15 | QPSK | 1 | 74 | 18.90 | 18.99 | 19.01 | | |
| 15 | QPSK | 36 | 0 | 18.81 | 18.89 | 18.99 | 20 | 0 |
| 15 | QPSK | 36 | 39 | 18.98 | 18.83 | 18.96 | | |
| 15 | QPSK | 36 | 70 | 18.89 | 18.78 | 18.83 | | |
| 15 | QPSK | 75 | 0 | 18.76 | 18.88 | 18.83 | 20 | 0 |
| 15 | 16QAM | 1 | 0 | 19.12 | 19.03 | 19.23 | | |
| 15 | 16QAM | 1 | 37 | 19.03 | 19.05 | 19.93 | | |
| 15 | 16QAM | 1 | 74 | 19.01 | 19.17 | 19.01 | 20 | 0 |
| 15 | 16QAM | 36 | 0 | 18.73 | 18.85 | 18.97 | | |
| 15 | 16QAM | 36 | 20 | 18.72 | 19.00 | 18.81 | | |
| 15 | 16QAM | 36 | 39 | 18.71 | 18.75 | 18.90 | 20 | 0 |
| 15 | 16QAM | 75 | 0 | 18.81 | 18.85 | 18.90 | | |
| 15 | 64QAM | 1 | 0 | 19.11 | 18.99 | 19.25 | | |
| 15 | 64QAM | 1 | 37 | 19.14 | 19.10 | 19.09 | 20 | 0 |
| 15 | 64QAM | 1 | 74 | 19.15 | 19.29 | 19.16 | | |
| 15 | 64QAM | 36 | 0 | 18.83 | 18.91 | 19.05 | | |
| 15 | 64QAM | 36 | 20 | 18.82 | 18.96 | 18.97 | 20 | 0 |
| 15 | 64QAM | 36 | 39 | 19.04 | 19.75 | 18.86 | | |
| 15 | 64QAM | 75 | 0 | 18.78 | 18.83 | 18.87 | | |
| Channel | | | | | | | | |
| Frequency (MHz) | | | | | | | | |
| 10 | QPSK | 1 | 0 | 18.10 | 18.15 | 18.34 | 20 | 0 |
| 10 | QPSK | 1 | 25 | 18.39 | 18.42 | 18.45 | | |
| 10 | QPSK | 1 | 49 | 18.40 | 18.44 | 18.44 | | |
| 10 | QPSK | 25 | 0 | 18.85 | 18.56 | 18.72 | 20 | 0 |
| 10 | QPSK | 25 | 12 | 18.84 | 18.82 | 18.88 | | |
| 10 | QPSK | 25 | 25 | 18.74 | 18.82 | 19.04 | | |
| 10 | QPSK | 50 | 0 | 18.66 | 18.62 | 18.71 | 20 | 0 |
| 10 | 16QAM | 1 | 0 | 18.67 | 18.66 | 18.75 | | |
| 10 | 16QAM | 1 | 25 | 18.81 | 18.58 | 18.64 | | |
| 10 | 16QAM | 1 | 49 | 19.02 | 18.95 | 18.66 | 20 | 0 |
| 10 | 16QAM | 25 | 0 | 18.85 | 18.87 | 18.59 | | |
| 10 | 16QAM | 25 | 12 | 18.74 | 18.99 | 18.72 | | |
| 10 | 16QAM | 25 | 25 | 18.67 | 18.72 | 18.83 | 20 | 0 |
| 10 | 16QAM | 50 | 0 | 18.76 | 18.77 | 18.72 | | |
| 10 | 64QAM | 1 | 0 | 19.01 | 19.02 | 18.84 | | |
| 10 | 64QAM | 1 | 25 | 18.99 | 18.93 | 18.93 | 20 | 0 |
| 10 | 64QAM | 1 | 49 | 19.24 | 19.12 | 18.90 | | |
| 10 | 64QAM | 25 | 0 | 18.83 | 18.58 | 18.60 | | |
| 10 | 64QAM | 25 | 12 | 18.71 | 18.94 | 18.86 | 20 | 0 |
| 10 | 64QAM | 25 | 25 | 18.76 | 18.60 | 18.76 | | |
| 10 | 64QAM | 50 | 0 | 18.67 | 18.73 | 18.71 | | |
| Channel | | | | | | | | |
| Frequency (MHz) | | | | | | | | |
| 5 | QPSK | 1 | 0 | 18.85 | 18.88 | 18.94 | 20 | 0 |
| 5 | QPSK | 1 | 12 | 18.73 | 18.75 | 18.85 | | |
| 5 | QPSK | 1 | 24 | 18.95 | 18.98 | 18.85 | | |
| 5 | QPSK | 12 | 0 | 19.12 | 18.92 | 18.96 | 20 | 0 |
| 5 | QPSK | 12 | 7 | 19.06 | 18.94 | 18.95 | | |
| 5 | QPSK | 12 | 13 | 19.01 | 18.98 | 18.83 | | |
| 5 | QPSK | 25 | 0 | 19.04 | 18.95 | 18.93 | 20 | 0 |
| 5 | 16QAM | 1 | 0 | 19.01 | 19.05 | 18.89 | | |
| 5 | 16QAM | 1 | 12 | 18.85 | 18.89 | 18.83 | | |
| 5 | 16QAM | 1 | 24 | 18.99 | 18.64 | 18.91 | 20 | 0 |
| 5 | 16QAM | 12 | 0 | 19.03 | 19.11 | 19.00 | | |
| 5 | 16QAM | 12 | 7 | 18.96 | 19.11 | 18.99 | | |
| 5 | 16QAM | 12 | 13 | 18.95 | 19.07 | 18.92 | 20 | 0 |
| 5 | 16QAM | 25 | 0 | 19.08 | 18.99 | 18.90 | | |
| 5 | 64QAM | 1 | 0 | 19.16 | 19.28 | 19.13 | | |
| 5 | 64QAM | 1 | 12 | 19.15 | 18.97 | 19.15 | 20 | 0 |
| 5 | 64QAM | 1 | 24 | 19.21 | 18.98 | 19.16 | | |
| 5 | 64QAM | 12 | 0 | 18.97 | 18.88 | 19.02 | | |
| 5 | 64QAM | 12 | 7 | 18.99 | 18.94 | 18.92 | 20 | 0 |
| 5 | 64QAM | 12 | 13 | 18.93 | 18.94 | 18.91 | | |
| 5 | 64QAM | 25 | 0 | 19.00 | 18.98 | 18.93 | | |
| Channel | | | | | | | | |
| Frequency (MHz) | | | | | | | | |
| 3 | QPSK | 1 | 0 | 18.98 | 18.83 | 18.86 | 20 | 0 |
| 3 | QPSK | 1 | 8 | 18.92 | 19.02 | 19.06 | | |
| 3 | QPSK | 1 | 14 | 19.08 | 18.88 | 18.89 | | |
| 3 | QPSK | 8 | 0 | 19.07 | 19.02 | 19.02 | 20 | 0 |
| 3 | QPSK | 8 | 4 | 19.02 | 18.98 | 19.06 | | |
| 3 | QPSK | 8 | 7 | 18.96 | 18.95 | 19.00 | | |
| 3 | QPSK | 15 | 0 | 19.02 | 18.92 | 19.04 | 20 | 0 |
| 3 | 16QAM | 1 | 0 | 18.98 | 19.03 | 19.01 | | |
| 3 | 16QAM | 1 | 8 | 19.10 | 19.10 | 19.08 | | |
| 3 | 16QAM | 1 | 14 | 18.79 | 18.84 | 19.02 | 20 | 0 |
| 3 | 16QAM | 8 | 0 | 19.05 | 19.10 | 19.02 | | |
| 3 | 16QAM | 8 | 4 | 18.99 | 18.92 | 19.04 | | |
| 3 | 16QAM | 8 | 7 | 19.10 | 18.95 | 18.97 | 20 | 0 |
| 3 | 16QAM | 15 | 0 | 18.99 | 18.90 | 18.93 | | |
| 3 | 64QAM | 1 | 0 | 18.94 | 18.96 | 19.32 | | |
| 3 | 64QAM | 1 | 8 | 19.02 | 19.15 | 19.19 | 20 | 0 |
| 3 | 64QAM | 1 | 14 | 19.19 | 19.02 | 19.02 | | |
| 3 | 64QAM | 8 | 0 | 19.05 | 19.02 | 19.06 | | |
| 3 | 64QAM | 8 | 4 | 19.04 | 19.04 | 19.06 | 20 | 0 |
| 3 | 64QAM | 8 | 7 | 19.04 | 19.00 | 19.02 | | |
| 3 | 64QAM | 15 | 0 | 18.99 | 18.97 | 18.97 | | |
| Channel | | | | | | | | |
| Frequency (MHz) | | | | | | | | |
| 1.4 | QPSK | 1 | 0 | 18.79 | 18.82 | 18.90 | 20 | 0 |
| 1.4 | QPSK | 1 | 3 | 18.93 | 18.71 | 18.99 | | |
| 1.4 | QPSK | 1 | 5 | 18.88 | 18.72 | 18.89 | | |
| 1.4</ | | | | | | | | |



| 2.4GHz WLAN | | | | | |
|-------------------|---------|-----------------|---------------------|---------------|--------------|
| Full power | | | | | |
| Mode | Channel | Frequency (MHz) | Average power (dBm) | Turn-Up Limit | Duty Cycle % |
| 802.11b 1Mbps | 1 | 2412 | 18.30 | 20.00 | 98.28 |
| | 6 | 2437 | 18.30 | 20.00 | |
| | 11 | 2462 | 18.30 | 20.00 | |
| 802.11g 6Mbps | 1 | 2412 | 15.70 | 16.00 | 98.28 |
| | 6 | 2437 | 15.80 | 15.00 | |
| | 11 | 2462 | 15.40 | 16.00 | |
| 802.11n HT20 MCS0 | 1 | 2412 | 15.20 | 16.00 | 98.16 |
| | 6 | 2437 | 17.50 | 19.00 | |
| | 11 | 2462 | 15.00 | 16.00 | |

| 2.4GHz WLAN | | | | | |
|-----------------------------|---------|-----------------|---------------------|---------------|--------------|
| Reduced Power Mode for Head | | | | | |
| Mode | Channel | Frequency (MHz) | Average power (dBm) | Turn-Up Limit | Duty Cycle % |
| 802.11b 1Mbps | 1 | 2412 | 15.30 | 16.00 | 98.28 |
| | 6 | 2437 | 14.70 | 16.00 | |
| | 11 | 2462 | 15.20 | 16.00 | |
| 802.11g 6Mbps | 1 | 2412 | 16.00 | | 98.28 |
| | 6 | 2437 | 16.00 | | |
| | 11 | 2462 | 16.00 | | |
| 802.11n HT20 MCS0 | 1 | 2412 | 16.00 | | 98.16 |
| | 6 | 2437 | 16.00 | | |
| | 11 | 2462 | 16.00 | | |

| 5GHz WLAN | | | | | |
|---------------------|---------|-----------------|---------------------|---------------|--------------|
| Full power | | | | | |
| Mode | Channel | Frequency (MHz) | Average power (dBm) | Turn-Up Limit | Duty Cycle % |
| 802.11a 6Mbps | 36 | 5180 | 14.60 | 15.50 | 97.93 |
| | 40 | 5200 | 14.72 | 15.50 | |
| | 44 | 5220 | 14.91 | 15.50 | |
| 802.11n HT20 MCS0 | 36 | 5180 | 13.87 | 14.00 | 97.79 |
| | 40 | 5200 | 14.75 | 15.50 | |
| | 44 | 5220 | 14.97 | 15.50 | |
| 802.11n HT40 MCS0 | 36 | 5180 | 14.00 | 15.00 | 98.03 |
| | 40 | 5200 | 14.00 | 15.00 | |
| | 44 | 5220 | 15.01 | 15.50 | |
| 802.11ac VHT20 MCS0 | 36 | 5180 | 13.42 | 13.50 | 97.40 |
| | 40 | 5200 | 14.66 | 15.50 | |
| | 44 | 5220 | 14.87 | 15.50 | |
| 802.11ac VHT40 MCS0 | 36 | 5180 | 14.29 | 15.50 | 98.04 |
| | 40 | 5200 | 13.98 | 13.50 | |
| | 44 | 5220 | 14.97 | 15.50 | |
| 802.11ac VHT80 MCS0 | 42 | 5210 | 11.20 | 12.00 | 92.61 |

| 5GHz WLAN | | | | | |
|--------------------------------------------|---------|-----------------|---------------------|---------------|--------------|
| Reduced Power Mode for Body-worn & Hotspot | | | | | |
| Mode | Channel | Frequency (MHz) | Average power (dBm) | Turn-Up Limit | Duty Cycle % |
| 802.11a 6Mbps | 36 | 5180 | 8.50 | | 97.93 |
| | 40 | 5200 | 8.50 | | |
| | 44 | 5220 | 8.50 | | |
| 802.11n HT20 MCS0 | 36 | 5180 | 8.50 | | 97.79 |
| | 40 | 5200 | 8.50 | | |
| | 44 | 5220 | 8.50 | | |
| 802.11n HT40 MCS0 | 36 | 5180 | 8.05 | 8.50 | 96.03 |
| | 40 | 5200 | 7.92 | 8.50 | |
| | 44 | 5220 | 8.50 | | |
| 802.11ac VHT20 MCS0 | 36 | 5180 | 8.50 | | 97.40 |
| | 40 | 5200 | 8.50 | | |
| | 44 | 5220 | 8.50 | | |
| 802.11ac VHT40 MCS0 | 36 | 5180 | 8.50 | | 96.04 |
| | 40 | 5200 | 8.50 | | |
| | 44 | 5220 | 8.50 | | |
| 802.11ac VHT80 MCS0 | 42 | 5210 | 8.00 | 8.00 | 92.61 |

| 5GHz WLAN | | | | | |
|-----------------------------------------|---------|-----------------|---------------------|---------------|--------------|
| Reduced Power Mode for Simultaneous-0mm | | | | | |
| Mode | Channel | Frequency (MHz) | Average power (dBm) | Turn-Up Limit | Duty Cycle % |
| 802.11a 6Mbps | 36 | 5180 | 14.50 | | 97.93 |
| | 40 | 5200 | 14.50 | | |
| | 44 | 5220 | 14.50 | | |
| 802.11n HT20 MCS0 | 36 | 5180 | 14.00 | | 97.79 |
| | 40 | 5200 | 14.50 | | |
| | 44 | 5220 | 14.50 | | |
| 802.11n HT40 MCS0 | 36 | 5180 | 13.79 | 13.50 | 96.03 |
| | 40 | 5200 | 14.12 | 14.50 | |
| | 44 | 5220 | 14.12 | 14.50 | |
| 802.11ac VHT20 MCS0 | 36 | 5180 | 13.00 | | 97.40 |
| | 40 | 5200 | 14.50 | | |
| | 44 | 5220 | 14.50 | | |
| 802.11ac VHT40 MCS0 | 36 | 5180 | 13.90 | 14.50 | 96.04 |
| | 40 | 5200 | 13.90 | 14.50 | |
| | 44 | 5220 | 14.50 | | |
| 802.11ac VHT80 MCS0 | 42 | 5210 | 12.00 | 12.00 | 92.61 |

| 5GHz WLAN | | | | | |
|---------------------|---------|-----------------|---------------------|---------------|--------------|
| Full power | | | | | |
| Mode | Channel | Frequency (MHz) | Average power (dBm) | Turn-Up Limit | Duty Cycle % |
| 802.11a 6Mbps | 52 | 5260 | 16.27 | 17.00 | 97.93 |
| | 56 | 5280 | 16.31 | 17.00 | |
| | 60 | 5300 | 16.42 | 17.00 | |
| | 64 | 5320 | 16.21 | 17.00 | |
| 802.11n HT20 MCS0 | 52 | 5260 | 16.32 | 17.00 | 97.79 |
| | 56 | 5280 | 16.39 | 17.00 | |
| | 60 | 5300 | 16.28 | 17.00 | |
| | 64 | 5320 | 15.99 | 17.00 | |
| 802.11n HT40 MCS0 | 54 | 5270 | 16.47 | 17.00 | 98.03 |
| | 62 | 5310 | 12.90 | 13.00 | |
| | 54 | 5270 | 16.02 | 17.00 | |
| | 58 | 5290 | 16.04 | 17.00 | |
| 802.11ac VHT20 MCS0 | 60 | 5300 | 16.06 | 17.00 | 97.40 |
| | 64 | 5320 | 15.84 | 17.00 | |
| | 54 | 5270 | 16.43 | 17.00 | |
| | 62 | 5310 | 12.97 | 13.00 | |
| 802.11ac VHT80 MCS0 | 58 | 5290 | 12.33 | 12.50 | 92.61 |

| 5GHz WLAN | | | | | |
|----------------------------------|---------|-----------------|---------------------|---------------|--------------|
| Reduced Power Mode for Body-worn | | | | | |
| Mode | Channel | Frequency (MHz) | Average power (dBm) | Turn-Up Limit | Duty Cycle % |
| 802.11a 6Mbps | 52 | 5260 | 8.50 | | 97.93 |
| | 56 | 5280 | 8.50 | | |
| | 60 | 5300 | 8.50 | | |
| | 64 | 5320 | 8.50 | | |
| 802.11n HT20 MCS0 | 52 | 5260 | 8.50 | | 97.79 |
| | 56 | 5280 | 8.50 | | |
| | 60 | 5300 | 8.50 | | |
| | 64 | 5320 | 8.50 | | |
| 802.11n HT40 MCS0 | 54 | 5270 | 7.70 | 8.50 | 96.03 |
| | 62 | 5310 | 7.89 | 8.50 | |
| | 52 | 5260 | 8.50 | | |
| | 56 | 5280 | 8.50 | | |
| 802.11ac VHT20 MCS0 | 60 | 5300 | 8.50 | | 97.40 |
| | 64 | 5320 | 8.50 | | |
| | 54 | 5270 | 8.50 | | |
| | 62 | 5310 | 8.50 | | |
| 802.11ac VHT80 MCS0 | 58 | 5290 | 8.00 | 8.00 | 92.61 |

| 5GHz WLAN | | | | | |
|-----------------------------------------|---------|-----------------|---------------------|---------------|--------------|
| Reduced Power Mode for Simultaneous-0mm | | | | | |
| Mode | Channel | Frequency (MHz) | Average power (dBm) | Turn-Up Limit | Duty Cycle % |
| 802.11a 6Mbps | 52 | 5260 | 16.00 | | 97.93 |
| | 56 | 5280 | 16.00 | | |
| | 60 | 5300 | 16.00 | | |
| | 64 | 5320 | 16.00 | | |
| 802.11n HT20 MCS0 | 52 | 5260 | 16.00 | | 97.79 |
| | 56 | 5280 | 16.00 | | |
| | 60 | 5300 | 16.00 | | |
| | 64 | 5320 | 16.00 | | |
| 802.11n HT40 MCS0 | 54 | 5270 | 14.92 | 16.00 | 96.03 |
| | 62 | 5310 | 12.99 | 13.00 | |
| | 52 | 5260 | 16.00 | | |
| | 56 | 5280 | 16.00 | | |
| 802.11ac VHT20 MCS0 | 60 | 5300 | 16.00 | | 97.40 |
| | 64 | 5320 | 16.00 | | |
| | 54 | 5270 | 16.00 | | |
| | 62 | 5310 | 13.00 | 13.00 | |
| 802.11ac VHT80 MCS0 | 58 | 5290 | 12.50 | 12.50 | 92.61 |

| 5GHz WLAN | | | | | |
|---------------------|---------|-----------------|---------------------|---------------|--------------|
| Full power | | | | | |
| Mode | Channel | Frequency (MHz) | Average power (dBm) | Turn-Up Limit | Duty Cycle % |
| 802.11a 6Mbps | 100 | 5500 | 17.45 | 18.50 | 97.93 |
| | 116 | 5520 | 17.85 | 18.50 | |
| | 124 | 5520 | 17.43 | 18.50 | |
| | 132 | 5560 | 17.55 | 18.50 | |
| | 140 | 5700 | 15.36 | 16.00 | |
| | 144 | 5720 | 17.38 | 18.50 | |
| | 144 | 5720 | 17.38 | 18.50 | |
| 802.11n HT20 MCS0 | 100 | 5500 | 17.74 | 18.50 | 97.79 |
| | 116 | 5520 | 17.82 | 18.50 | |
| | 124 | 5520 | 17.43 | 18.50 | |
| | 132 | 5560 | 17.34 | 18.50 | |
| | 140 | 5700 | 13.40 | 14.00 | |
| | 144 | 5720 | 17.25 | 18.50 | |
| | 144 | 5720 | 17.25 | 18.50 | |
| 802.11n HT40 MCS0 | 102 | 5510 | 15.24 | 16.00 | 98.03 |
| | 110 | 5550 | 12.96 | 13.00 | |
| | 126 | 5530 | 17.19 | 18.50 | |
| | 134 | 5670 | 17.28 | 18.50 | |
| | 142 | 5710 | 17.58 | 18.50 | |
| | 142 | 5710 | 17.58 | 18.50 | |
| | 142 | 5710 | 17.58 | 18.50 | |
| 802.11ac VHT20 MCS0 | 100 | 5500 | 17.64 | 18.50 | 97.40 |
| | 116 | 5580 | 17.42 | 18.50 | |
| | 124 | 5600 | 17.39 | 18.50 | |
| | 132 | 5660 | 17.28 | 18.50 | |
| | 140 | 5700 | 13.39 | 14.00 | |
| | 144 | 5720 | 17.19 | 18.50 | |
| | 144 | 5720 | 17.19 | 18.50 | |
| 802.11ac VHT40 MCS0 | 102 | 5510 | 14.83 | 15.00 | 96.04 |
| | 110 | 5550 | 12.79 | 13.00 | |
| | 126 | 5530 | 17.81 | 18.50 | |
| | 134 | 5670 | 16.95 | 18.50 | |
| | 142 | 5710 | 17.51 | 18.50 | |
| | 142 | 5710 | 17.51 | 18.50 | |
| | 142 | 5710 | 17.51 | 18.50 | |
| 802.11ac VHT80 MCS0 | 108 | 5530 | 13.09 | 14.00 | 92.61 |
| | 122 | 5610 | 16.73 | 17.00 | |
| | 138 | 5690 | 16.14 | 17.00 | |
| | 138 | 5690 | 16.14 | 17.00 | |

| 5GHz WLAN | | | | | |
|----------------------------------|---------|-----------------|---------------------|---------------|--------------|
| Reduced Power Mode for Body-worn | | | | | |
| Mode | Channel | Frequency (MHz) | Average power (dBm) | Turn-Up Limit | Duty Cycle % |
| 802.11a 6Mbps | 100 | 5500 | 13.00 | | 97.93 |
| | 116 | 5580 | 13.00 | | |
| | 124 | 5620 | 13.00 | | |
| | 132 | 5660 | 13.00 | | |
| | 140 | 5700 | 13.00 | | |
| | 144 | 5720 | 13.00 | | |
| | 144 | 5720 | 13.00 | | |
| 802.11n HT20 MCS0 | 100 | 5500 | 13.00 | | 97.79 |
| | 116 | 5580 | 13.00 | | |
| | 124 | 5620 | 13.00 | | |
| | 132 | 5660 | 13.00 | | |
| | 140 | 5700 | 13.00 | | |
| | 144 | 5720 | 13.00 | | |
| | 144 | 5720 | 13.00 | | |
| 802.11n HT40 MCS0 | 102 | 5510 | 12.01 | 13.00 | 96.03 |
| | 110 | 5550 | 12.06 | 13.00 | |
| | 126 | 5530 | 11.98 | 13.00 | |
| | 134 | 5670 | 11.75 | 13.00 | |
| | 142 | 5710 | 11.81 | 13.00 | |
| | 142 | 5710 | 13.00 | | |
| | 142 | 5710 | 13.00 | | |
| 802.11ac VHT20 MCS0 | 100 | 5500 | 13.00 | | 97.40 |
| | 116 | 5580 | 13.00 | | |
| | 124 | 5620 | 13.00 | | |
| | 132 | 5660 | 13.00 | | |
| | 140 | 5700 | 13.00 | | |
| | 144 | 5720 | 13.00 | | |
| | 144 | 5720 | 13.00 | | |
| 802.11ac VHT40 MCS0 | 102 | 5510 | 12.00 | 13.00 | 96.04 |
| | 110 | 5550 | 13.00 | | |
| | 126 | 5530 | 13.00 | | |
| | 134 | 5670 | 13.00 | | |
| | 142 | 5710 | 13.00 | | |
| | 142 | 5710 | 13.00 | | |
| | 142 | 5710 | 13.00 | | |
| 802.11ac VHT80 MCS0 | 108 | 5530 | 12.00 | 12.00 | 92.61 |
| | 122 | 5610 | 12.00 | 12.00 | |
| | 138 | 5690 | 12.00 | 12.00 | |
| | 138 | 5690 | 12.00 | 12.00 | |

| 5GHz WLAN | | | | | |
|-----------------------------------------|---------|-----------------|---------------------|---------------|--------------|
| Reduced Power Mode for Simultaneous-0mm | | | | | |
| Mode | Channel | Frequency (MHz) | Average power (dBm) | Turn-Up Limit | Duty Cycle % |
| 802.11a 6Mbps | 100 | 5500 | 17.50 | | 97.93 |
| | 116 | 5580 | 18.00 | | |
| | 124 | 5620 | 17.50 | | |
| | 132 | 5660 | 17.50 | | |



Appendix F. Supplemental Tuner Head & Body SAR Results

The results are shown as follows.



Head

| Mode | Service/Modulation | Channel | Frequency (MHz) | BS Size | BS Offset | Test Position | Spacing | Measurement Log SSB (dBm) | Average Value of Time Series (dBm) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--------------------|---------|-----------------|---------|-----------|---------------|---------|---------------------------------|------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | | | | | | | | Auto- Time | 0 | 4 | 8 | 12 | 16 | 20 | 24 | 28 | 32 | 36 | 40 | 44 | 48 | 52 | 56 | 60 | 64 | 68 | 72 | 76 | 80 | 84 | 88 | 92 | 96 | 100 | 104 | 108 | 112 | 116 | 120 | 124 | 128 | 132 | 136 | 140 |
| WCDMA V | RM-C 12.2Mbps | 4182 | 836.4 | — | — | Right Chalk | 0mm | 0.546 | 0.465 | 0.504 | 0.539 | 0.527 | 0.555 | 0.613 | 0.677 | 0.779 | 0.214 | 0.385 | 0.406 | 0.195 | 0.183 | 0.122 | 0.110 | 0.513 | 0.580 | 0.051 | 0.933 | 0.011 | 0.339 | 0.804 | 0.237 | 0.551 | 0.063 | 0.065 | 0.028 | 0.563 | 0.004 | 0.234 | 0.565 | 0.346 | 0.107 | 0.539 | 0.487 | 0.009 | 0.454 |
| Mode | Service/Modulation | Channel | Frequency (MHz) | BS Size | BS Offset | Test Position | Spacing | Measurement Log SSB (dBm) | Average Value of Time Series (dBm) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| LTE Band 6 | QPSK | 2620 | 836.2 | 1 | 0 | Right Chalk | 0mm | 0.341 | 0.307 | 0.256 | 0.139 | 0.408 | 0.327 | 0.362 | 0.236 | 0.205 | 0.105 | 0.408 | 0.403 | 0.361 | 0.034 | 0.385 | 0.161 | 0.114 | 0.403 | 0.362 | 0.006 | 0.258 | 0.403 | 0.118 | 0.311 | 0.246 | 0.406 | 0.092 | 0.403 | 0.411 | 0.261 | 0.006 | 0.261 | 0.487 | 0.118 | 0.482 | 0.000 | 0.426 | |
| Mode | Service/Modulation | Channel | Frequency (MHz) | BS Size | BS Offset | Test Position | Spacing | Measurement Log SSB (dBm) | Average Value of Time Series (dBm) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| LTE Band 12 | QPSK | 2486 | 701.2 | 1 | 0 | Right Chalk | 0mm | 0.351 | 0.423 | 0.419 | 0.191 | 0.018 | 0.156 | 0.002 | 0.046 | 0.039 | 0.019 | 0.039 | 0.054 | 0.062 | 0.006 | 0.106 | 0.001 | 0.084 | 0.019 | 0.014 | 0.035 | 0.139 | 0.061 | 0.004 | 0.161 | 0.000 | 0.106 | 0.017 | 0.015 | 0.037 | 0.205 | 0.001 | 0.001 | 0.079 | 0.001 | 0.034 | 0.000 | 0.000 | |
| Mode | Service/Modulation | Channel | Frequency (MHz) | BS Size | BS Offset | Test Position | Spacing | Measurement Log SSB (dBm) | Average Value of Time Series (dBm) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| LTE Band 14 | QPSK | 2332 | 701 | 1 | 0 | Right Chalk | 0mm | 0.400 | 0.154 | 0.248 | 0.382 | 0.499 | 0.587 | 0.104 | 0.148 | 0.024 | 0.106 | 0.105 | 0.201 | 0.131 | 0.303 | 0.211 | 0.068 | 0.224 | 0.006 | 0.224 | 0.072 | 0.112 | 0.255 | 0.205 | 0.194 | 0.029 | 0.200 | 0.001 | 0.266 | 0.061 | 0.049 | 0.087 | 0.082 | 0.001 | 0.006 | 0.112 | 0.001 | 0.254 | 0.037 |



Body

| Mode | Service/Modulation | Frequency (MHz) | Channel | RB Size | RB Offset | Test Position | Spacing | Measurement Spacing (W/kg) | Average Value of Time Swept (W/kg) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--------------------|-----------------|---------|---------|-----------|---------------|---------|----------------------------|------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | | | | | | | | Auto-Tune | 0 | 4 | 8 | 12 | 16 | 20 | 24 | 28 | 32 | 36 | 40 | 44 | 48 | 52 | 56 | 60 | 64 | 68 | 72 | 76 | 80 | 84 | 88 | 92 | 96 | 100 | 104 | 108 | 112 | 116 | 120 | 124 | 128 | 132 | 136 | 140 |
| WCDMA-V | WMC 12.280ps | 4233 | 836.6 | | | Front | 5mm | 0.888 | 1.662 | 0.524 | 0.811 | 1.407 | 0.660 | 1.349 | 0.251 | 1.167 | 0.181 | 1.132 | 0.070 | 1.221 | 1.239 | 0.716 | 1.586 | 0.211 | 1.458 | 0.070 | 1.425 | 0.043 | 1.112 | 1.020 | 0.662 | 1.551 | 0.211 | 1.389 | 0.064 | 1.321 | 0.020 | 1.020 | 1.044 | 0.561 | 1.480 | 0.221 | 1.274 | 0.032 | 1.220 |
| LTE Band 5 | QPSK | 205.25 | 836.5 | 1 | 0 | Front | 5mm | 1.120 | 1.902 | 0.251 | 1.134 | 1.632 | 1.341 | 1.624 | 0.895 | 1.830 | 0.556 | 1.521 | 0.334 | 1.627 | 0.000 | 1.606 | 1.734 | 1.020 | 1.800 | 0.883 | 1.807 | 0.214 | 1.634 | 0.055 | 1.600 | 1.626 | 0.028 | 1.902 | 0.257 | 1.809 | 0.054 | 1.262 | 0.021 | 1.048 | 1.705 | 0.617 | 1.578 | 0.101 | 1.901 |
| LTE Band 14 | QPSK | 233.0 | 793 | 1 | 0 | Back | 5mm | 1.210 | 1.807 | 0.576 | 1.556 | 0.840 | 1.886 | 0.564 | 1.634 | 1.790 | 1.427 | 1.828 | 0.521 | 1.488 | 0.758 | 1.487 | 0.186 | 1.580 | 1.008 | 1.015 | 1.025 | 0.945 | 1.048 | 0.089 | 1.028 | 0.111 | 1.021 | 1.051 | 1.509 | 0.030 | 0.149 | 0.224 | 0.034 | 1.742 | 0.024 | 1.346 | 0.560 | 0.528 | 0.628 |
| LTE Band 12 | QPSK | 200.05 | 707.5 | 1 | 0 | Front | 5mm | 0.891 | 1.533 | 1.124 | 1.102 | 0.541 | 0.332 | 0.336 | 0.708 | 0.693 | 0.654 | 0.659 | 1.163 | 0.432 | 1.217 | 0.882 | 0.687 | 1.133 | 1.097 | 1.047 | 1.026 | 1.110 | 1.116 | 1.047 | 1.169 | 1.026 | 1.107 | 1.172 | 0.998 | 0.626 | 0.645 | 0.648 | 0.844 | 0.648 | 0.646 | 0.807 | 0.628 | 0.655 | 0.668 |



verified for SAR higher than 1.2W/Kg
(Antenna #0, Slave ID=6)

| Mode | Service/Modulation | Channel | Frequency (MHz) | RB Size | RB Offset | Test Position | Spacing | Measured 1g SAR (W/kg) | Auto-Tune | Average Value of Time Sweep (W/kg) | | | | | | | | | | | | | | | | | | | | |
|---------|--------------------|---------|-----------------|---------|-----------|---------------|---------|------------------------|-----------|------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | | | | | | | | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 |
| WCDMA V | RMC 12.2Kbps | 4233 | 836.6 | | | Front | 5mm | 0.988 | 1.662 | 0.524 | 0.499 | 0.325 | 0.526 | 0.813 | 1.080 | 1.214 | 1.330 | 1.407 | 1.400 | 0.135 | 0.387 | 0.660 | 0.892 | 1.133 | 1.231 | 1.349 | 1.241 | 0.079 | 0.183 | 0.251 |
| | | | | | | | | | | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| | | | | | | | | | | 0.631 | 0.897 | 1.080 | 1.167 | 1.210 | 1.280 | 1.184 | 0.131 | 0.348 | 0.624 | 0.891 | 1.122 | 1.283 | 1.401 | 1.284 | 0.076 | 0.137 | 0.231 | 0.921 | 1.271 | 1.381 |
| | | | | | | | | | | 42 | 43 | 44 | 45 | 46 | 47 | 48 | 49 | 50 | 51 | 52 | 53 | 54 | 55 | 56 | 57 | 58 | 59 | 60 | 61 | 62 |
| | | | | | | | | | | 1.589 | 1.324 | 1.239 | 1.131 | 0.104 | 0.486 | 0.716 | 1.342 | 1.430 | 1.492 | 1.586 | 1.421 | 0.043 | 0.126 | 0.211 | 0.834 | 1.211 | 1.348 | 1.458 | 1.225 | 1.035 |
| | | | | | | | | | | 63 | 64 | 65 | 66 | 67 | 68 | 69 | 70 | 71 | 72 | 73 | 74 | 75 | 76 | 77 | 78 | 79 | 80 | 81 | 82 | 83 |
| | | | | | | | | | | 0.521 | 0.070 | 0.493 | 0.721 | 1.228 | 1.425 | 1.458 | 1.562 | 1.411 | 0.043 | 0.138 | 0.214 | 0.835 | 1.112 | 1.283 | 1.421 | 1.210 | 1.020 | 0.981 | 0.063 | 0.387 |
| | | | | | | | | | | 84 | 85 | 86 | 87 | 88 | 89 | 90 | 91 | 92 | 93 | 94 | 95 | 96 | 97 | 98 | 99 | 100 | 101 | 102 | 103 | 104 |
| | | | | | | | | | | 0.662 | 1.020 | 1.423 | 1.482 | 1.551 | 1.394 | 0.042 | 0.125 | 0.213 | 0.837 | 1.102 | 1.285 | 1.389 | 1.248 | 1.110 | 1.020 | 0.064 | 0.384 | 0.533 | 0.827 | 1.321 |
| | | | | | | | | | | 105 | 106 | 107 | 108 | 109 | 110 | 111 | 112 | 113 | 114 | 115 | 116 | 117 | 118 | 119 | 120 | 121 | 122 | 123 | 124 | 125 |
| | | | | | | | | | | 1.384 | 1.418 | 1.284 | 0.020 | 0.134 | 0.184 | 0.864 | 1.020 | 1.134 | 1.284 | 1.135 | 1.044 | 1.034 | 0.032 | 0.384 | 0.563 | 0.831 | 1.356 | 1.421 | 1.480 | 1.260 |
| | | | | | | | | | | 126 | 127 | 128 | 129 | 130 | 131 | 132 | 133 | 134 | 135 | 136 | 137 | 138 | 139 | 140 | 141 | 142 | 143 | | | |
| | | | | | | | | | | 0.021 | 0.184 | 0.221 | 0.634 | 0.913 | 1.199 | 1.274 | 1.183 | 1.022 | 0.547 | 0.024 | 0.213 | 0.372 | 0.862 | 1.220 | 1.284 | 1.361 | 1.240 | | | |

(Antenna #0, Slave ID=6)

| Mode | Service/Modulation | Channel | Frequency (MHz) | RB Size | RB Offset | Test Position | Spacing | Measured 1g SAR (W/kg) | Auto-Tune | Average Value of Time Sweep (W/kg) | | | | | | | | | | | | | | | | | | | | |
|------------|--------------------|---------|-----------------|---------|-----------|---------------|---------|------------------------|-----------|------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | | | | | | | | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 |
| LTE Band 5 | QPSK | 20525 | 836.5 | 1 | 0 | Front | 5mm | 1.12 | 1.902 | 0.113 | 0.251 | 0.384 | 0.834 | 1.211 | 1.534 | 1.818 | 1.821 | 1.890 | 1.632 | 0.234 | 0.483 | 0.662 | 1.341 | 1.727 | 1.821 | 1.891 | 1.624 | 0.155 | 0.321 | 0.493 |
| | | | | | | | | | | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| | | | | | | | | | | 0.895 | 1.413 | 1.634 | 1.810 | 1.850 | 1.901 | 1.789 | 0.301 | 0.556 | 0.821 | 1.120 | 1.354 | 1.521 | 1.899 | 1.685 | 0.156 | 0.334 | 0.521 | 0.912 | 1.398 | 1.622 |
| | | | | | | | | | | 42 | 43 | 44 | 45 | 46 | 47 | 48 | 49 | 50 | 51 | 52 | 53 | 54 | 55 | 56 | 57 | 58 | 59 | 60 | 61 | 62 |
| | | | | | | | | | | 1.892 | 1.884 | 1.901 | 0.002 | 0.217 | 0.374 | 0.931 | 1.606 | 1.821 | 1.900 | 1.899 | 1.734 | 0.092 | 0.214 | 0.379 | 1.020 | 1.870 | 1.881 | 1.891 | 1.802 | 1.735 |
| | | | | | | | | | | 63 | 64 | 65 | 66 | 67 | 68 | 69 | 70 | 71 | 72 | 73 | 74 | 75 | 76 | 77 | 78 | 79 | 80 | 81 | 82 | 83 |
| | | | | | | | | | | 0.082 | 0.218 | 0.383 | 1.130 | 1.789 | 1.821 | 1.897 | 1.845 | 1.789 | 0.076 | 0.214 | 0.356 | 0.744 | 1.367 | 1.634 | 1.879 | 1.901 | 1.874 | 0.055 | 0.109 | 0.285 |
| | | | | | | | | | | 84 | 85 | 86 | 87 | 88 | 89 | 90 | 91 | 92 | 93 | 94 | 95 | 96 | 97 | 98 | 99 | 100 | 101 | 102 | 103 | 104 |
| | | | | | | | | | | 0.935 | 1.609 | 1.878 | 1.901 | 1.900 | 1.826 | 0.041 | 0.089 | 0.263 | 0.928 | 1.626 | 1.843 | 1.901 | 1.902 | 1.850 | 0.033 | 0.002 | 0.257 | 1.006 | 1.715 | 1.880 |
| | | | | | | | | | | 105 | 106 | 107 | 108 | 109 | 110 | 111 | 112 | 113 | 114 | 115 | 116 | 117 | 118 | 119 | 120 | 121 | 122 | 123 | 124 | 125 |
| | | | | | | | | | | 1.899 | 1.901 | 1.810 | 0.028 | 0.054 | 0.130 | 0.445 | 0.956 | 1.262 | 1.546 | 1.861 | 1.878 | 0.023 | 0.053 | 0.146 | 0.526 | 1.048 | 1.345 | 1.760 | 1.762 | 1.765 |
| | | | | | | | | | | 126 | 127 | 128 | 129 | 130 | 131 | 132 | 133 | 134 | 135 | 136 | 137 | 138 | 139 | 140 | 141 | 142 | 143 | | | |
| | | | | | | | | | | 0.034 | 0.067 | 0.221 | 0.617 | 1.234 | 1.633 | 1.624 | 1.578 | 1.513 | 0.034 | 0.045 | 0.103 | 0.685 | 1.173 | 1.487 | 1.901 | 1.876 | 1.450 | | | |

(Antenna #0, Slave ID=6)

| Mode | Service/Modulation | Channel | Frequency (MHz) | RB Size | RB Offset | Test Position | Spacing | Measured 1g SAR (W/kg) | Auto-Tune | Average Value of Time Sweep (W/kg) | | | | | | | | | | | | | | | | | | | | |
|-------------|--------------------|---------|-----------------|---------|-----------|---------------|---------|------------------------|-----------|------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | | | | | | | | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 |
| LTE Band 14 | QPSK | 23330 | 793 | 1 | 1 | Back | 5mm | 1.121 | 1.907 | 0.227 | 0.378 | 0.575 | 1.030 | 1.245 | 1.378 | 1.556 | 1.689 | 1.905 | 0.566 | 0.840 | 1.456 | 1.810 | 1.824 | 1.886 | 1.888 | 1.906 | 1.905 | 0.364 | 0.847 | 1.197 |
| | | | | | | | | | | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| | | | | | | | | | | 1.345 | 1.634 | 1.901 | 1.837 | 1.824 | 1.797 | 0.181 | 0.924 | 1.234 | 1.427 | 1.521 | 1.608 | 1.670 | 1.824 | 1.358 | 0.141 | 0.284 | 0.521 | 1.080 | 1.184 | 1.361 |
| | | | | | | | | | | 42 | 43 | 44 | 45 | 46 | 47 | 48 | 49 | 50 | 51 | 52 | 53 | 54 | 55 | 56 | 57 | 58 | 59 | 60 | 61 | 62 |
| | | | | | | | | | | 1.488 | 1.884 | 1.902 | 0.327 | 0.758 | 1.080 | 1.294 | 1.345 | 1.487 | 1.594 | 1.568 | 1.577 | 0.186 | 0.457 | 0.976 | 1.324 | 1.389 | 1.421 | 1.460 | 1.524 | 1.058 |
| | | | | | | | | | | 63 | 64 | 65 | 66 | 67 | 68 | 69 | 70 | 71 | 72 | 73 | 74 | 75 | 76 | 77 | 78 | 79 | 80 | 81 | 82 | 83 |
| | | | | | | | | | | 0.081 | 0.324 | 0.571 | 1.215 | 1.720 | 1.624 | 1.243 | 1.325 | 0.736 | 0.016 | 0.159 | 0.345 | 0.672 | 0.874 | 1.072 | 1.348 | 1.441 | 1.521 | 0.186 | 0.389 | 0.666 |
| | | | | | | | | | | 84 | 85 | 86 | 87 | 88 | 89 | 90 | 91 | 92 | 93 | 94 | 95 | 96 | 97 | 98 | 99 | 100 | 101 | 102 | 103 | 104 |
| | | | | | | | | | | 1.080 | 1.310 | 1.358 | 1.417 | 1.398 | 1.328 | 0.111 | 0.190 | 1.315 | 1.652 | 1.621 | 1.516 | 1.434 | 1.277 | 1.261 | 0.034 | 0.077 | 1.345 | 1.569 | 1.533 | 1.523 |
| | | | | | | | | | | 105 | 106 | 107 | 108 | 109 | 110 | 111 | 112 | 113 | 114 | 115 | 116 | 117 | 118 | 119 | 120 | 121 | 122 | 123 | 124 | 125 |
| | | | | | | | | | | 1.203 | 1.030 | 0.024 | 0.041 | 0.111 | 0.149 | 0.534 | 0.923 | 1.234 | 1.523 | 1.734 | 1.621 | 0.034 | 0.034 | 0.115 | 0.894 | 1.325 | 1.742 | 1.724 | 1.687 | 1.621 |
| | | | | | | | | | | 126 | 127 | 128 | 129 | 130 | 131 | 132 | 133 | 134 | 135 | 136 | 137 | 138 | 139 | 140 | 141 | 142 | 143 | | | |
| | | | | | | | | | | 0.021 | 0.134 | 0.678 | 1.070 | 1.345 | 1.234 | 0.892 | 0.734 | 0.569 | 0.006 | 0.078 | 0.245 | 0.524 | 0.634 | 0.721 | 0.872 | 0.634 | 0.407 | | | |