



FCC RF TEST REPORT

FCC ID : IHDT56ZP1
Equipment : Mobile Cellular Phone
Brand Name : Motorola
Model Name : XT2141-1
Applicant : Motorola Mobility LLC
 222 W, Merchandise Mart Plaza,
 Chicago IL 60654 USA
Manufacturer : Motorola Mobility LLC
 222 W, Merchandise Mart Plaza,
 Chicago IL 60654 USA
Standard : FCC 47 CFR Part 2, 30
Test Date(s) : Jun. 21, 2021 ~ Jul. 15, 2021

We, Sporton International (ShenZhen) Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures ANSI C63.26-2015 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (ShenZhen) Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Derreck Chen

Reviewed by: Derreck Chen / Supervisor

Eric Shih

Approved by: Eric Shih / Manager



Sporton International (ShenZhen) Inc.

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan Shenzhen, 518055
 People's Republic of China



Table of Contents

History of this test report..... 3

Summary of Test Result..... 4

1 General Description 5

 1.1 Feature of Equipment Under Test..... 5

 1.2 Product Specification of Equipment Under Test 5

 1.3 Modification of EUT 5

 1.4 Testing Location 6

 1.5 Specification of Accessory 6

 1.6 Maximum EIRP Power and Emission Designator 7

 1.7 Applied Standards 7

2 Test Configuration of Equipment Under Test 8

 2.1 Test Mode..... 8

 2.2 Connection Diagram of Test System 9

 2.3 Measurement Results Explanation Example 9

 2.4 Far Field Condition for Frequency above 18GHz..... 10

 2.5 Frequency List of Low/Middle/High Channels..... 10

3 Radiated Test Items 11

 3.1 Measuring Instruments..... 11

 3.2 Test Setup 11

 3.3 Test Result of Radiated Test..... 13

 3.4 EIRP Measurement 14

 3.5 Occupied Bandwidth 15

 3.6 Radiated Spurious Emission Measurement..... 16

 3.7 Frequency Stability Measurement..... 17

4 List of Measuring Equipment..... 18

5 Uncertainty of Evaluation 19

Appendix A. Test Results of EIRP and Radiated Test

Appendix B. Test Setup Photos

Appendix C. R&S Mixer Certificate

Appendix D. Calibration certificate of Standard Gain Horn Antennas



History of this test report

Report No.	Version	Description	Issued Date
FG151701-02G	01	Initial issue of report	Jul. 23, 2021
FG151701-02G	02	Update the 2CC frequency range in section 1.6	Jul. 29, 2021



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Limit	Result (PASS/FAIL)	Remark
3.4	§2.1046 §30.202	EIRP Measurement	+43dBm	Pass	-
3.5	§2.1049	Occupied Bandwidth	Not Applicable	Reporting only	-
3.6	§2.1053 §30.203	Radiated Spurious Emission	-5dBm/MHz -13dBm/MHz	Pass	-
3.7	§2.1055	Frequency Stability for Temperature & Voltage	Within the band	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2141-1
FCC ID	IHDT56ZP1
IMEI Code	Radiated: 351758640006803
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer.

1.2 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Device Category in Part 30	Mobile station
Tx Frequency	NR band n260: 37GHz ~ 40GHz NR band n261: 27.5GHz ~ 28.35GHz
Rx Frequency	NR band n260: 37GHz ~ 40GHz NR band n261: 27.5GHz ~ 28.35GHz
Support Bandwidth	NR band n260: 50 MHz and 100 MHz NR band n261: 50 MHz and 100 MHz
Maximum Number of contiguous CC	2
Maximum Aggregated Bandwidth	200MHz
Maximum EIRP	NR band n260: Module 0: 27.77 dBm Module 1: 26.06 dBm NR band n261: Module 0: 28.96 dBm Module 1: 25.04 dBm
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM DFT-s-OFDM: Pi/2-BPSK / QPSK / 16QAM / 64QAM

Remark: The highest EIRP was measured on dual beam case for n260/n261.

1.3 Modification of EUT

No modifications are made to the EUT during all test items.



1.4 Testing Location

Sporton International (Shenzhen) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International (Shenzhen) Inc.		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH02-SZ	CN1256	421272
Engineer	shun ping You		
Temperature	22~25°C		
Humidity	48~52%		

1.5 Specification of Accessory

Specification of Accessory				
AC Adapter 1	Brand Name	Motorola (Salom)	Model Name	MC-301
AC Adapter 2	Brand Name	Motorola (Acbel)	Model Name	MC-301
Battery	Brand Name	Motorola (ATL)	Model Name	MB50
USB Cable 1	Brand Name	Motorola (Luxshare)	Model Name	SC18D13217
USB Cable 2	Brand Name	Motorola (Saibao)	Model Name	SC18D13215
USB Cable 3	Brand Name	Motorola (Cabletech)	Model Name	SC18D13216

1.6 Maximum EIRP Power and Emission Designator

5G NR n260		PI/2 BPSK / QPSK		16QAM / 64QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
50	37025 ~ 39975	0.5333	45M7G7D	0.3524	45M8W7D
100	37050 ~ 39950	0.5984	91M3G7D	0.3296	93M1W7D
200	37050 ~ 39950	0.1919	188MG7D	0.1596	189MW7D

5G NR n261		PI/2 BPSK / QPSK		16QAM / 64QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
50	27525 ~ 28325	0.6714	45M8G7D	0.4335	45M7W7D
100	27550 ~ 28300	0.7870	91M2G7D	0.4819	91M0W7D
200	27550 ~ 28300	0.2805	186MG7D	0.2371	186MW7D

1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC 47 CFR Part 2, 30
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 842590 D01 Upper Microwave Flexible Use Service v01r02

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

EUT has total 2 millimeter wave antenna modules and up to 2 beams operation for each module.

Any antenna module cannot transmit simultaneously with the other antenna modules.

Preliminary EIRP test was performed for all beam configurations in the anechoic chamber at the manufacturer’s facility so the EIRP worst case beam-pair were identified.

EIRP was investigated that the dual beam rated maximum EIRP is higher than single beam.

EUT configured to transmit dual beam at the same time.

EUT performs the test in non-signaling mode.

The NR radio operation is controlled via software tool QRCT FTM mode (Factory mode).

The EUT is forced to operate continuously (100% duty cycle) with maximum output power.


Only the worst case setting configuration of the device is reported in the test report.

2.1 Test Mode

For radiated measurement, the pre-scan is performed to find the worst cases EUT position.

Test Items	Band	Bandwidth (MHz)			Modulation DFT-s-OFDM				RB #			Test Channel		
		50	100	200	BPSK	QPSK	16QAM	64QAM	1	-	Full	L	M	H
EIRP	n260 n261	v	v	v	v	v	v	v	v		v	v	v	v
99% Occupied Bandwidth	n260 n261	v	v	v	v	v	v	v			v	v	v	v
Out of Band Emission	n260 n261	v	v	v	v	v	v	v	v		v	v		v
Spurious Emission	n260 n261	v	v	v	v	v			v			v	v	v
Frequency Stability	n260 n261	CW tone											v	
Remark	<ol style="list-style-type: none"> The mark “v “ means that this configuration is chosen for testing The device is investigated from 30MHz to 100GHz of fundamental signal for radiated spurious emission test under different RB size and modulations in exploratory test. Subsequently, only the worst case emissions are reported. All the radiated test cases were performed with built-in battery. The out of band and spurious emission were measured radiated EIRP. The 200MHz BW is carrier aggregation by 2CC of 100MHz 													

2.2 Connection Diagram of Test System

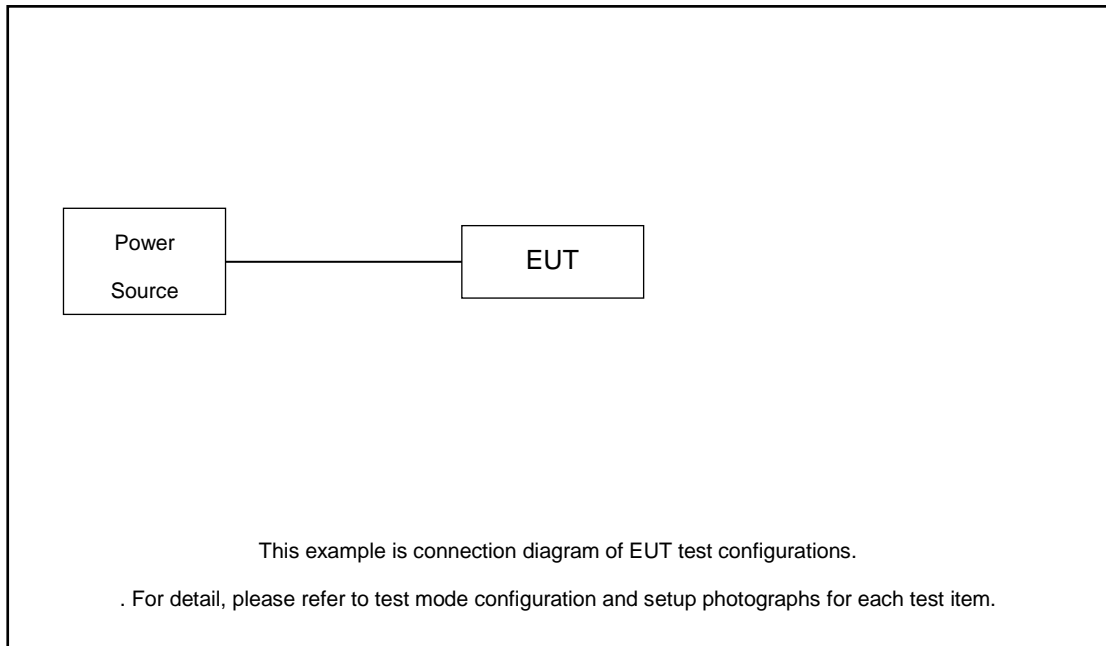

2.3 Measurement Results Explanation Example

According to ANSI C63.26-2015 Section 5.2.7

$$\text{EIRP (dBm)} = E(\text{dBuV/m}) + 20\log(D) - 104.8.$$

where D is the measurement distance (in the far field region) in m.

$$E(\text{dBuV/m}) = \text{Spectrum Reading Level (dBm)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107$$

Hence, the spectrum analyzer *Offset* is derived including RF cable loss and antenna factor.

$$\text{Offset} = \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8$$

The conversion loss of RF mixer is also included by the mixer table of spectrum analyzer when measurement frequency is above 40GHz.

Example :

$$\begin{aligned}\text{Offset} &= \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8 \\ &= 42.5 + 0.4 + 107 + 20\log(1) - 104.8 \\ &= 45.1 \text{ (dB)}\end{aligned}$$



2.4 Far Field Condition for Frequency above 18GHz

Horn Antenna	Frequency (GHz)	Antenna Dimension A (mm)	Wavelength (λ) (m)	Far field R (m) $\geq 2A^2 / \lambda$	Measurement Distance (D) (m)	Distance Factor $20\log(D)$ (dB)
BBHA 9170	18	60	0.0167	0.43	1	0.00
	40	60	0.0075	0.96		
QWH-UPRR00	40	48	0.0075	0.61	1	0.00
	60	48	0.0050	0.92		
QWH-EPRR00	60	31	0.0050	0.38	1	0.00
	90	31	0.0033	0.58		
QWH-FPRR00	90	21	0.0033	0.26	1	0.00
	140	21	0.0021	0.41		
QWH-GPRR00	140	15	0.0021	0.21	0.5	-6.02
	220	15	0.0014	0.33		

2.5 Frequency List of Low/Middle/High Channels

NR Band n260 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
50	Frequency	37025	38500	39975
100	Frequency	37050	38500	39950
200	Frequency 1	37050	38450	39850
	Frequency 2	37150	38550	39950

NR Band n261 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
50	Frequency	27525	27925	28325
100	Frequency	27550	27925	28300
200	Frequency 1	27550	27875	28200
	Frequency 2	27650	27975	28300


3 Radiated Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


For radiated emissions from 30MHz to 1GHz

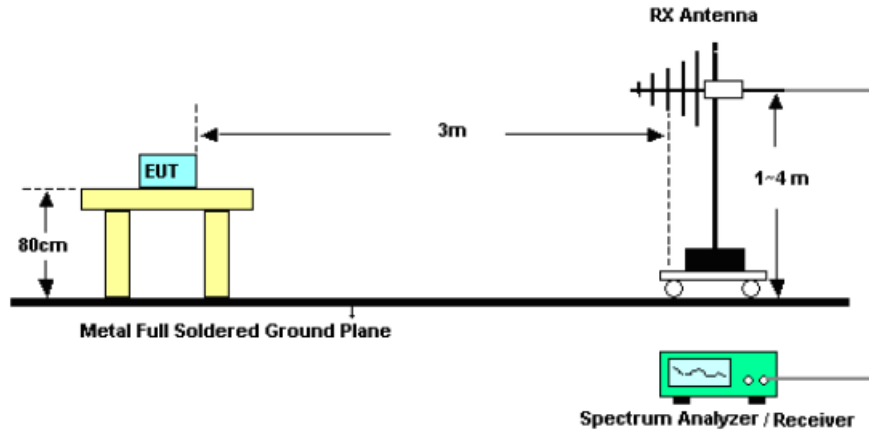


For radiated emissions 1GHz to 18GHz

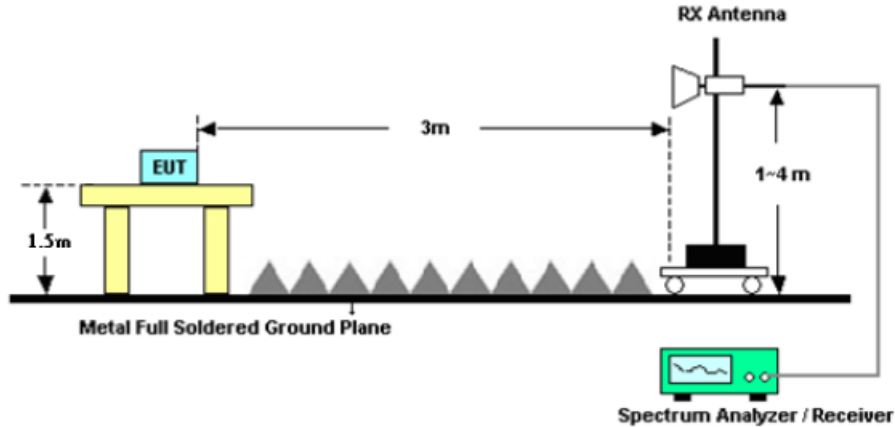


For radiated emissions above 18GHz up to 40GHz

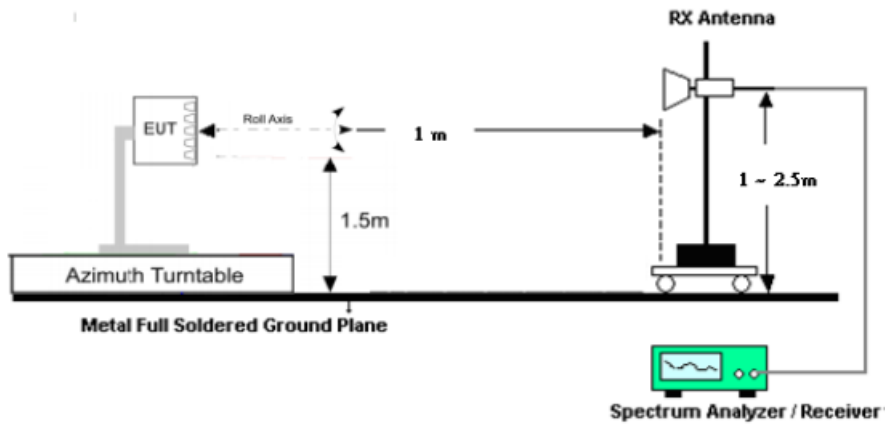

For radiated emissions above 40GHz up to 140GHz

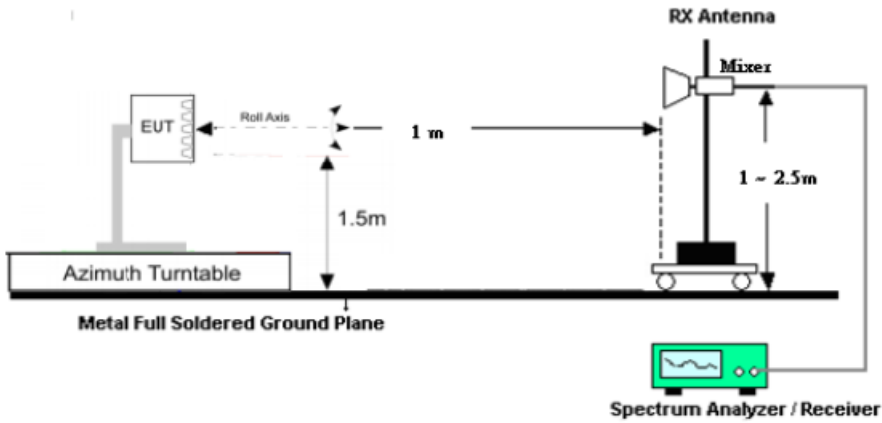

For radiated emissions above 140GHz up to 200GHz

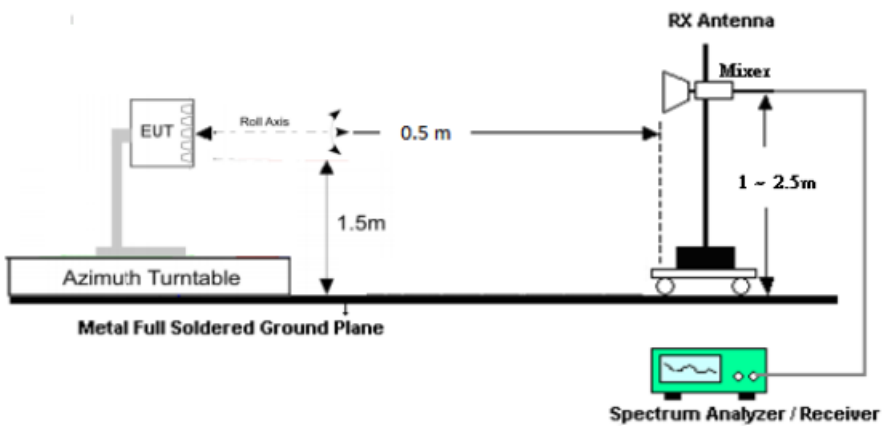



3.3 Test Result of Radiated Test

Please refer to Appendix A.



3.4 EIRP Measurement

3.4.1 Description of EIRP Measurement

For mobile stations, the average power of the sum of all antenna elements is limited to a maximum EIRP of +43 dBm.

3.4.2 Test Procedures

1. Set EUT at maximum output power.
2. Select lowest, middle, and highest channels for each band and different modulation.
3. Enable channel power function of spectrum analyzer
4. Set frequency would like to be investigated.
5. Set Detector = RMS
6. Set Trace mode = trace average
7. Set Sweep time = auto couple
8. Set sweep points $\geq 2 \times \text{Span/RBW}$
9. Set sweep count 100 and wait until the trace to be stabilized
10. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
11. Measure and record the power level from the spectrum analyzer.
12. The test result is calculated according to

ANSI C63.26-2015 Section 5.2.7

$$\text{EIRP (dBm)} = \text{E(dBuV/m)} + 20\log(D) - 104.8.$$

where D is the measurement distance (in the far field region) in m.

$$\text{E (dBuV/m)} = \text{Spectrum Level (dBm)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107$$

That is, set the spectrum offset including sum of

$$\text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8$$



3.5 Occupied Bandwidth

3.5.1 Description of Occupied Bandwidth Measurement

This is for reporting only.

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

3.5.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.4

1. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be at least 1.5 times the anticipated OBW.
2. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
3. Set the detection mode to peak, and the trace mode to max hold.
4. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.6 Radiated Spurious Emission Measurement

3.6.1 Description of Radiated Spurious Emission Measurement

The spectrum is scanned from 30 MHz up to 200GHz.

The conductive power or the total radiated power of any emission outside a licensee's frequency block shall be -13 dBm/MHz or lower. However, in the bands immediately outside and adjacent to the licensee's frequency block, having a bandwidth equal to 10 percent of the channel bandwidth, the conductive power or the total radiated power of any emission shall be -5 dBm/MHz or lower.

3.6.2 Test Procedures

1. Set EUT at maximum output power..
2. Select lowest, middle, and highest channels for each band and different modulation.
3. Measure and record the power level from the spectrum analyzer.
4. Set frequency would like to be investigated.
5. Set Detector = RMS
6. Set Trace mode = trace average
7. Set Sweep time = auto couple
8. Set sweep points $\geq 2 \times \text{Span/RBW}$
9. Set sweep count 100 and wait until the trace to be stabilized
10. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
11. For measurement frequency from 30MHz to 18GHz,
An antenna was substituted in place of the EUT and was driven by a signal generator.
Tune the output power of signal generator to the same emission level with EUT maximum spurious emission. Take record of output power and repeat for another polarization.
12. For measurement frequency above 18GHz,
the test result is calculated according to
ANSI C63.26-2015 Section 5.2.7 and 5.7.3 and 5.7.4
$$\text{EIRP (dBm)} = \text{E(dBuV/m)} + 20\log(D) - 104.8.$$
where D is the measurement distance (in the far field region) in m.
$$\text{E (dBuV/m)} = \text{Spectrum Level (dBm)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107$$
That is, set the spectrum offset including sum of
$$\text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8$$
13. The conversion loss of RF mixer is also included in conversion loss table of the spectrum analyzer when measurement frequency is above 40GHz.



3.7 Frequency Stability Measurement

3.7.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.

1. The EUT was set up in the thermal chamber.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.

1. The EUT was placed in a temperature chamber at 20° C.
2. The power supply voltage to the EUT was varied from the lowest to the highest operation range.
3. The variation in frequency was measured for the worst case.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV3044	101128	9KHz-44GHz	Mar. 03, 2021	Jun. 21, 2021~ Jul. 15, 2021	Mar. 02, 2022	Radiation (03CH02-SZ)
Spectrum Analyzer	R&S	FSV40	101829	10Hz~40GHz	Mar. 08, 2021	Jun. 21, 2021~ Jul. 15, 2021	Mar. 07, 2022	Radiation (03CH02-SZ)
Spectrum Analyzer	R&S	FSV40	NA	18Ghz-40GHz	Apr. 11, 2021	Jun. 21, 2021~ Jul. 15, 2021	Apr. 10, 2022	Radiation (03CH02-SZ)
Harmonic Mixer (*)	R&S	FS-Z60	101017	40-60GHz	Sep. 19, 2019	Jun. 21, 2021~ Jul. 15, 2021	Sep. 18, 2022	Radiation (03CH02-SZ)
Harmonic Mixer (*)	R&S	FS-Z90	102037	60-90GHz	Oct. 10, 2019	Jun. 21, 2021~ Jul. 15, 2021	Oct. 09, 2022	Radiation (03CH02-SZ)
Harmonic Mixer (*)	R&S	FS-Z140	101141	90-140GHz	Sep. 09, 2019	Jun. 21, 2021~ Jul. 15, 2021	Sep. 08, 2022	Radiation (03CH02-SZ)
Harmonic Mixer (*)	R&S	FS-Z220	101026	140-220GHz	Apr. 09, 2019	Jun. 21, 2021~ Jul. 15, 2021	Apr. 08, 2022	Radiation (03CH02-SZ)
Horn Antenna	SCHWARZBECK	BBHA 9170	9170 #679	15GHz~40GHz	Jul. 26, 2020	Jun. 21, 2021~ Jul. 15, 2021	Jul. 25, 2021	Radiation (03CH02-SZ)
Standard Horn Antenna	Quinstar	QWH-UPRR 00	01	40-60GHz	Jul. 10, 2020	Jun. 21, 2021~ Jul. 15, 2021	Jul. 09, 2023	Radiation (03CH02-SZ)
Standard Horn Antenna	Quinstar	QWH-EPRR 00	1012700010	60-90GHz	Jul. 10, 2020	Jun. 21, 2021~ Jul. 15, 2021	Jul. 09, 2023	Radiation (03CH02-SZ)
Standard Horn Antenna	Quinstar	QWH-FPRR 00	1011500009	90-140GHz	Jul. 10, 2020	Jun. 21, 2021~ Jul. 15, 2021	Jul. 09, 2023	Radiation (03CH02-SZ)
Standard Horn Antenna	Quinstar	QWH-GPRR 00	01	140-220GHz	Jul. 10, 2020	Jun. 21, 2021~ Jul. 15, 2021	Jul. 09, 2023	Radiation (03CH02-SZ)
Temperature & Humidity Chamber	ESPEC	SH-241	92013271	Temperature(-40~15 0°C)Humidity	May 13, 2021	Jun. 21, 2021~ Jul. 15, 2021	May 12, 2022	Radiation (03CH02-SZ)
Turn Table	EMEC	NA	NA	Phi/Theta 0~360 Degree	NA	Jun. 21, 2021~ Jul. 15, 2021	NA	Radiation (03CH02-SZ)
Controller	EMEC	EM 1000	NA	Control Turn table	NA	Jun. 21, 2021~ Jul. 15, 2021	NA	Radiation (03CH02-SZ)

Note: (*) Equipment manufacturer's Calibration Certificate.



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.47dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.31dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.72dB
---	--------

Uncertainty of Radiated Emission Measurement (40 GHz ~ 140 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.98dB
---	--------

Uncertainty of Radiated Emission Measurement (140 GHz ~ 200 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.72dB
---	--------



Appendix A. Test Results of EIRP and Radiated Test

EIRP Power(Average power)

NR Band n260 Module 0

NR Band n260 Module 0 AG0 (Beam ID:19)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Lowest	50	DFT-S	BPSK	24.92	25.09
	50	DFT-S	QPSK	25.28	25.09
	50	DFT-S	16QAM	22.50	22.91
	50	DFT-S	64QAM	20.41	20.41
	100	DFT-S	BPSK	25.39	25.47
	100	DFT-S	QPSK	25.64	25.52
	100	DFT-S	16QAM	22.88	23.32
	100	DFT-S	64QAM	20.91	21.04
	200	DFT-S	BPSK	17.42	19.85
	200	DFT-S	QPSK	17.69	19.73
	200	DFT-S	16QAM	17.54	19.20
	200	DFT-S	64QAM	18.44	17.22

Note :The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



NR Band n260 Module 0 AG0 (Beam ID:19)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Middle	50	DFT-S	BPSK	24.32	24.51
	50	DFT-S	QPSK	24.70	24.50
	50	DFT-S	16QAM	21.92	22.43
	50	DFT-S	64QAM	19.62	20.32
	100	DFT-S	BPSK	24.36	24.94
	100	DFT-S	QPSK	24.98	24.74
	100	DFT-S	16QAM	22.30	22.80
	100	DFT-S	64QAM	20.03	20.68
	200	DFT-S	BPSK	17.62	20.89
	200	DFT-S	QPSK	17.67	20.94
	200	DFT-S	16QAM	17.37	20.34
	200	DFT-S	64QAM	17.74	18.40

Note :The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



NR Band n260 Module 0 AG0 (Beam ID: 19)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Highest	50	DFT-S	BPSK	23.33	23.58
	50	DFT-S	QPSK	23.62	23.43
	50	DFT-S	16QAM	21.01	21.38
	50	DFT-S	64QAM	19.04	19.05
	100	DFT-S	BPSK	23.34	23.31
	100	DFT-S	QPSK	23.61	23.37
	100	DFT-S	16QAM	20.84	21.20
	100	DFT-S	64QAM	19.03	19.08
	200	DFT-S	BPSK	17.40	19.90
	200	DFT-S	QPSK	17.37	19.81
	200	DFT-S	16QAM	17.84	19.42
	200	DFT-S	64QAM	18.41	17.07

Note :The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



NR Band n260 Module 0 AG1 (Beam ID:147)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Lowest	50	DFT-S	BPSK	25.45	25.08
	50	DFT-S	QPSK	24.73	25.09
	50	DFT-S	16QAM	23.13	23.03
	50	DFT-S	64QAM	20.26	20.49
	100	DFT-S	BPSK	25.68	25.38
	100	DFT-S	QPSK	25.17	25.43
	100	DFT-S	16QAM	23.38	23.38
	100	DFT-S	64QAM	20.50	21.23
	200	DFT-S	BPSK	17.91	20.35
	200	DFT-S	QPSK	17.66	20.60
	200	DFT-S	16QAM	18.01	19.74
	200	DFT-S	64QAM	18.49	17.58

Note :The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



NR Band n260 Module 0 AG1 (Beam ID: 147)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Middle	50	DFT-S	BPSK	26.35	26.35
	50	DFT-S	QPSK	26.12	26.40
	50	DFT-S	16QAM	24.90	24.20
	50	DFT-S	64QAM	21.98	22.19
	100	DFT-S	BPSK	26.73	26.65
	100	DFT-S	QPSK	26.33	26.65
	100	DFT-S	16QAM	25.18	24.63
	100	DFT-S	64QAM	22.20	22.53
	200	DFT-S	BPSK	17.56	21.44
	200	DFT-S	QPSK	17.52	21.31
	200	DFT-S	16QAM	17.25	20.67
	200	DFT-S	64QAM	18.19	18.66

Note :The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



NR Band n260 Module 0 AG1 (Beam ID:147)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Highest	50	DFT-S	BPSK	25.44	25.38
	50	DFT-S	QPSK	24.88	25.19
	50	DFT-S	16QAM	23.32	23.39
	50	DFT-S	64QAM	20.72	20.91
	100	DFT-S	BPSK	25.46	25.21
	100	DFT-S	QPSK	24.83	25.16
	100	DFT-S	16QAM	23.21	23.32
	100	DFT-S	64QAM	20.66	21.27
	200	DFT-S	BPSK	19.96	22.44
	200	DFT-S	QPSK	19.77	22.45
	200	DFT-S	16QAM	20.18	21.95
	200	DFT-S	64QAM	20.70	19.90

Note :The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



NR Band n260 Module 0 AG0+1 (Beam ID:19+147)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Lowest	50	DFT-S	BPSK	24.58	26.44
	50	DFT-S	QPSK	24.27	26.33
	50	DFT-S	16QAM	21.88	24.16
	50	DFT-S	64QAM	20.08	21.79
	100	DFT-S	BPSK	23.34	26.54
	100	DFT-S	QPSK	23.44	26.52
	100	DFT-S	16QAM	20.77	24.60
	100	DFT-S	64QAM	18.97	22.34
	200	DFT-S	BPSK	18.66	21.30
	200	DFT-S	QPSK	19.01	21.29
	200	DFT-S	16QAM	18.52	20.63
	200	DFT-S	64QAM	18.64	18.71

Note :The 200MHz Bw is carrier aggregation by 2CC of 100MHz.




NR Band n260 Module 0 AG0+1 (Beam ID:19+147)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Middle	50	DFT-S	BPSK	27.18	27.23
	50	DFT-S	QPSK	27.23	27.27
	50	DFT-S	16QAM	25.18	25.47
	50	DFT-S	64QAM	22.68	22.88
	100	DFT-S	BPSK	27.13	27.77
	100	DFT-S	QPSK	26.98	27.70
	100	DFT-S	16QAM	24.84	24.75
	100	DFT-S	64QAM	22.11	22.97
	100	CP	QPSK	22.94	23.66
	100	CP	16QAM	21.75	21.73
	100	CP	64QAM	18.71	19.42
	200	DFT-S	BPSK	18.99	21.88
	200	DFT-S	QPSK	18.86	21.82
	200	DFT-S	16QAM	18.29	21.45
	200	DFT-S	64QAM	18.99	19.25

Note :The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



NR Band n260 Module 0 AG0+1 (Beam ID:19+147)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Highest	50	DFT-S	BPSK	25.54	26.17
	50	DFT-S	QPSK	25.31	26.17
	50	DFT-S	16QAM	23.21	24.24
	50	DFT-S	64QAM	21.44	22.09
	100	DFT-S	BPSK	24.35	26.14
	100	DFT-S	QPSK	24.20	26.06
	100	DFT-S	16QAM	22.42	24.22
	100	DFT-S	64QAM	19.64	22.14
	200	DFT-S	BPSK	19.74	21.57
	200	DFT-S	QPSK	20.05	21.58
	200	DFT-S	16QAM	19.75	20.87
	200	DFT-S	64QAM	19.77	19.14

Note :The 200MHz Bw is carrier aggregation by 2CC of 100MHz.

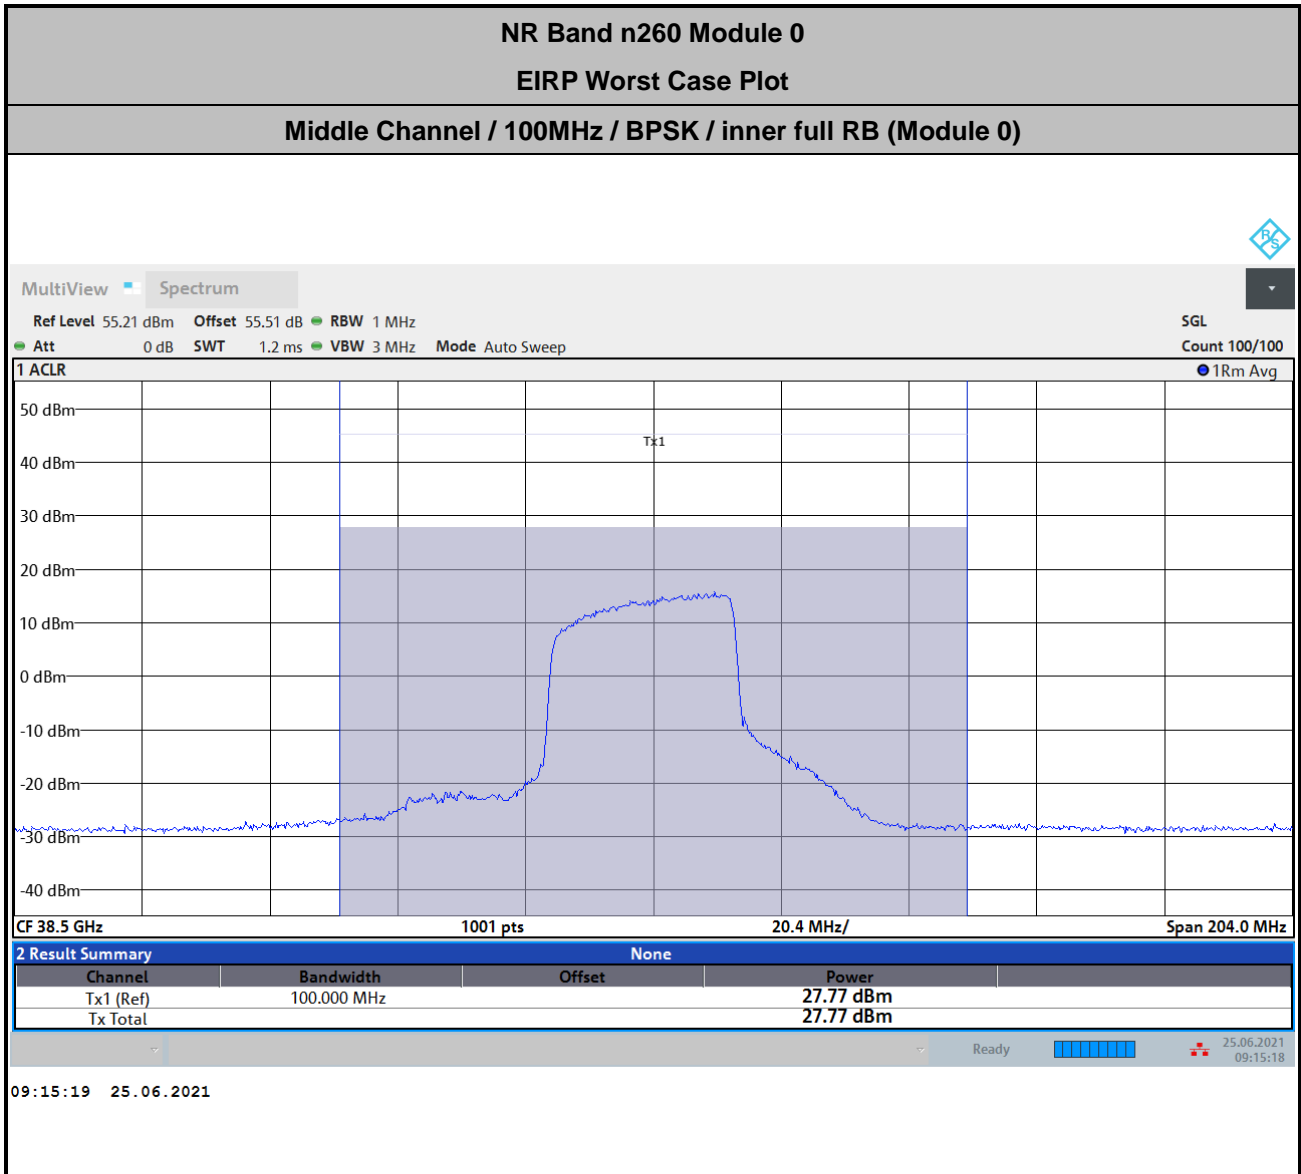

$$\begin{aligned} \text{Offset} &= \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8 \\ &= 43.8 + 9.51 + 107 + 20\log(1) - 104.8 = 55.51 \text{ (dB)} \end{aligned}$$



NR Band n260 Module 1

NR Band n260 Module 1 AG0 (Beam ID:14)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Lowest	50	DFT-S	BPSK	22.99	23.08
	50	DFT-S	QPSK	22.79	23.19
	50	DFT-S	16QAM	21.26	21.07
	50	DFT-S	64QAM	18.85	19.01
	100	DFT-S	BPSK	23.10	23.34
	100	DFT-S	QPSK	22.78	23.33
	100	DFT-S	16QAM	21.13	21.06
	100	DFT-S	64QAM	18.92	18.86
	200	DFT-S	BPSK	17.28	19.20
	200	DFT-S	QPSK	17.15	19.18
	200	DFT-S	16QAM	16.19	18.65
	200	DFT-S	64QAM	17.34	16.39

Note :The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



NR Band n260 Module 1 AG0 (Beam ID:14)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Middle	50	DFT-S	BPSK	23.83	24.08
	50	DFT-S	QPSK	23.79	24.20
	50	DFT-S	16QAM	21.46	21.72
	50	DFT-S	64QAM	19.84	19.95
	100	DFT-S	BPSK	23.76	24.14
	100	DFT-S	QPSK	23.84	24.17
	100	DFT-S	16QAM	21.40	21.81
	100	DFT-S	64QAM	19.62	19.74
	200	DFT-S	BPSK	17.43	19.66
	200	DFT-S	QPSK	16.94	19.61
	200	DFT-S	16QAM	17.33	19.01
	200	DFT-S	64QAM	17.42	17.14

Note :The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



NR Band n260 Module 1 AG0 (Beam ID: 14)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Highest	50	DFT-S	BPSK	22.44	22.55
	50	DFT-S	QPSK	21.77	22.60
	50	DFT-S	16QAM	20.46	20.81
	50	DFT-S	64QAM	17.66	18.33
	100	DFT-S	BPSK	21.82	21.86
	100	DFT-S	QPSK	21.34	21.77
	100	DFT-S	16QAM	20.01	19.40
	100	DFT-S	64QAM	17.49	17.51
	200	DFT-S	BPSK	16.91	19.30
	200	DFT-S	QPSK	16.66	19.30
	200	DFT-S	16QAM	15.67	18.84
	200	DFT-S	64QAM	17.74	16.64

Note :The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



NR Band n260 Module 1 AG1 (Beam ID:142)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Lowest	50	DFT-S	BPSK	22.14	21.13
	50	DFT-S	QPSK	21.70	21.09
	50	DFT-S	16QAM	19.78	18.93
	50	DFT-S	64QAM	17.92	16.97
	100	DFT-S	BPSK	22.56	22.22
	100	DFT-S	QPSK	21.82	22.14
	100	DFT-S	16QAM	19.91	20.19
	100	DFT-S	64QAM	18.13	18.10
	200	DFT-S	BPSK	17.00	19.13
	200	DFT-S	QPSK	16.66	19.02
	200	DFT-S	16QAM	17.21	18.42
	200	DFT-S	64QAM	16.98	16.30

Note :The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



NR Band n260 Module 1 AG1 (Beam ID: 142)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Middle	50	DFT-S	BPSK	22.29	22.43
	50	DFT-S	QPSK	22.59	22.32
	50	DFT-S	16QAM	20.07	20.33
	50	DFT-S	64QAM	18.01	18.11
	100	DFT-S	BPSK	22.54	22.41
	100	DFT-S	QPSK	22.25	22.31
	100	DFT-S	16QAM	20.44	20.30
	100	DFT-S	64QAM	18.51	18.23
	200	DFT-S	BPSK	15.85	18.81
	200	DFT-S	QPSK	15.41	18.76
	200	DFT-S	16QAM	16.22	18.11
	200	DFT-S	64QAM	15.85	16.17

Note :The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



NR Band n260 Module 1 AG1 (Beam ID:142)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Highest	50	DFT-S	BPSK	22.34	22.25
	50	DFT-S	QPSK	22.50	22.28
	50	DFT-S	16QAM	19.52	20.26
	50	DFT-S	64QAM	17.69	17.82
	100	DFT-S	BPSK	22.07	21.73
	100	DFT-S	QPSK	22.37	21.62
	100	DFT-S	16QAM	18.98	19.55
	100	DFT-S	64QAM	17.15	17.50
	200	DFT-S	BPSK	16.60	18.15
	200	DFT-S	QPSK	16.03	18.17
	200	DFT-S	16QAM	15.15	17.49
	200	DFT-S	64QAM	17.31	15.82

Note :The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



NR Band n260 Module 1 AG0+1 (Beam ID: 14&142)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Lowest	50	DFT-S	BPSK	23.56	23.89
	50	DFT-S	QPSK	23.37	23.62
	50	DFT-S	16QAM	20.75	21.78
	50	DFT-S	64QAM	18.23	19.35
	100	DFT-S	BPSK	23.74	24.36
	100	DFT-S	QPSK	23.79	24.51
	100	DFT-S	16QAM	20.84	22.43
	100	DFT-S	64QAM	18.35	20.06
	200	DFT-S	BPSK	20.18	22.76
	200	DFT-S	QPSK	20.14	22.83
	200	DFT-S	16QAM	20.68	22.03
	200	DFT-S	64QAM	20.34	20.32

Note :The 200MHz Bw is carrier aggregation by 2CC of 100MHz.




NR Band n260 Module 1 AG0+1 (Beam ID:14&142)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Middle	50	DFT-S	BPSK	24.56	24.81
	50	DFT-S	QPSK	24.64	24.72
	50	DFT-S	16QAM	22.60	22.58
	50	DFT-S	64QAM	20.32	20.60
	100	DFT-S	BPSK	24.22	23.24
	100	DFT-S	QPSK	24.29	23.03
	100	DFT-S	16QAM	22.27	21.15
	100	DFT-S	64QAM	20.01	19.00
	200	DFT-S	BPSK	20.77	22.15
	200	DFT-S	QPSK	20.96	21.95
	200	DFT-S	16QAM	20.74	21.39
	200	DFT-S	64QAM	20.98	19.31

Note :The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



NR Band n260 Module 1 AG0+1 (Beam ID: 14&142)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Highest	50	DFT-S	BPSK	26.01	24.85
	50	DFT-S	QPSK	26.06	24.83
	50	DFT-S	16QAM	23.26	22.81
	50	DFT-S	64QAM	21.35	20.50
	50	CP	QPSK	22.93	22.31
	50	CP	16QAM	20.48	20.89
	50	CP	64QAM	19.05	18.21
	100	DFT-S	BPSK	23.66	25.07
	100	DFT-S	QPSK	23.87	25.04
	100	DFT-S	16QAM	21.12	22.88
	100	DFT-S	64QAM	19.83	20.88
	200	DFT-S	BPSK	19.86	20.45
	200	DFT-S	QPSK	19.21	20.33
	200	DFT-S	16QAM	20.09	19.95
	200	DFT-S	64QAM	19.13	17.75

Note :The 200MHz Bw is carrier aggregation by 2CC of 100MHz.

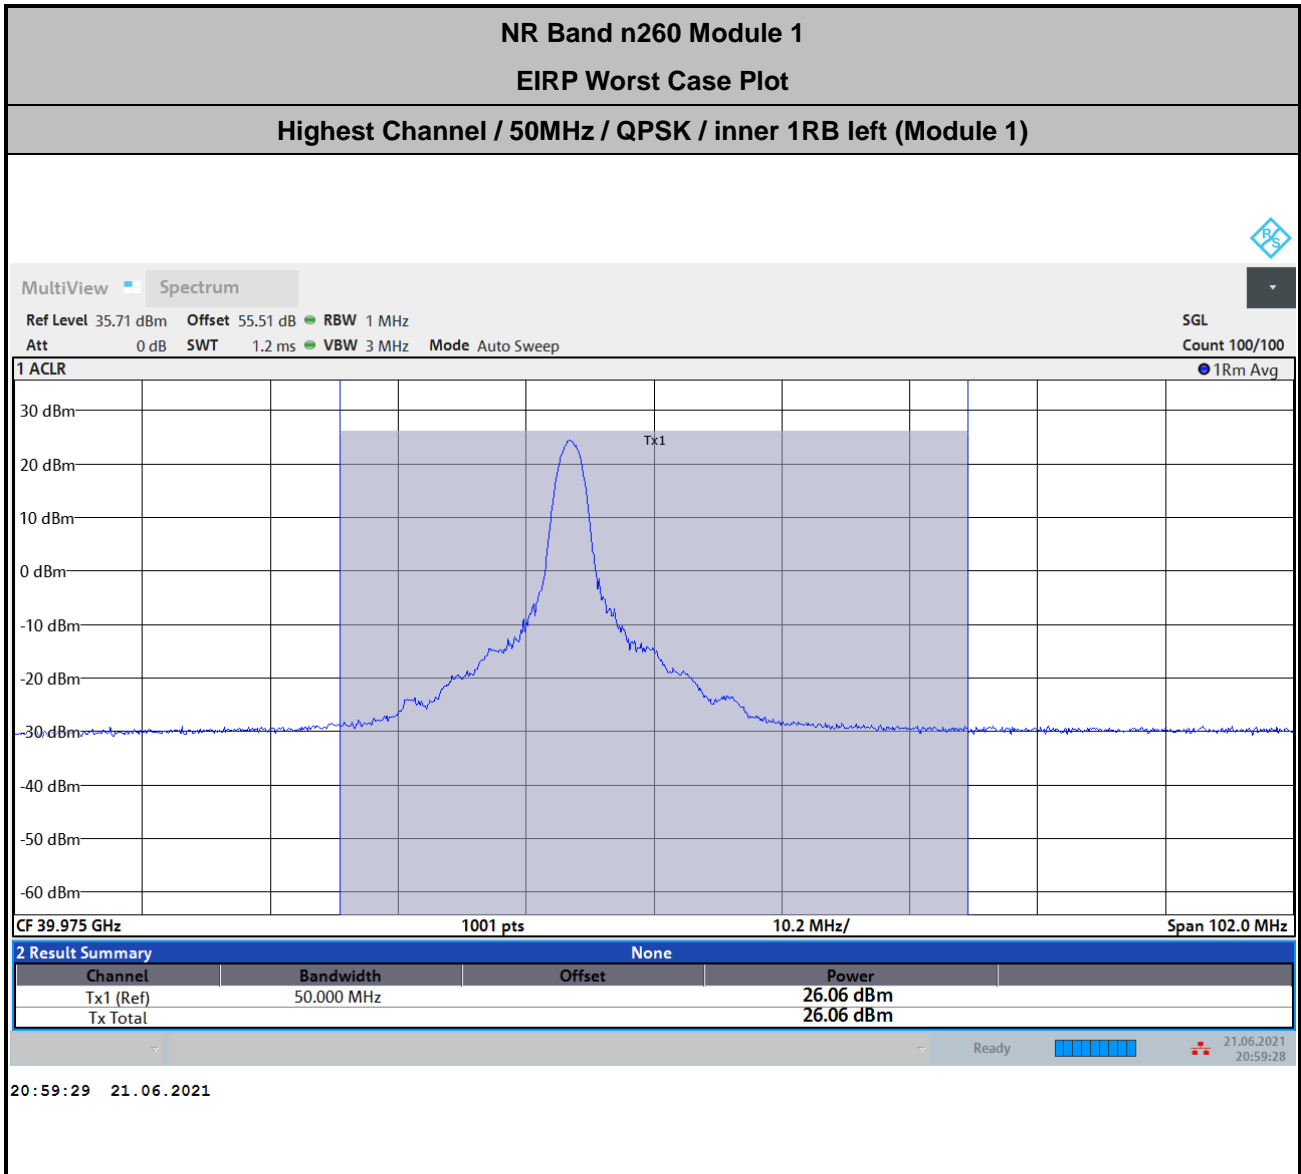

$$\begin{aligned} \text{Offset} &= \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8 \\ &= 43.8 + 9.51 + 107 + 20\log(1) - 104.8 = 55.51 \text{ (dB)} \end{aligned}$$



NR Band n261 Module 0

NR Band n261 Module 0 AG0 (Beam ID:19)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Lowest	50	DFT-S	BPSK	26.01	26.03
	50	DFT-S	QPSK	26.36	25.93
	50	DFT-S	16QAM	23.96	23.82
	50	DFT-S	64QAM	21.70	21.72
	100	DFT-S	BPSK	27.50	27.26
	100	DFT-S	QPSK	27.68	27.29
	100	DFT-S	16QAM	25.72	25.42
	100	DFT-S	64QAM	23.40	23.20
	200	DFT-S	BPSK	20.89	23.96
	200	DFT-S	QPSK	20.46	24.00
	200	DFT-S	16QAM	19.95	23.26
	200	DFT-S	64QAM	20.49	21.45

Note :The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



NR Band n261 Module 0 AG0 (Beam ID:19)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Middle	50	DFT-S	BPSK	25.21	25.57
	50	DFT-S	QPSK	25.23	25.60
	50	DFT-S	16QAM	23.31	23.75
	50	DFT-S	64QAM	20.69	21.13
	100	DFT-S	BPSK	26.60	26.66
	100	DFT-S	QPSK	26.91	26.59
	100	DFT-S	16QAM	25.29	24.56
	100	DFT-S	64QAM	22.74	22.64
	200	DFT-S	BPSK	20.36	23.24
	200	DFT-S	QPSK	19.85	23.36
	200	DFT-S	16QAM	19.94	22.58
	200	DFT-S	64QAM	20.29	20.68

Note :The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



NR Band n261 Module 0 AG0 (Beam ID: 19)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Highest	50	DFT-S	BPSK	25.78	26.33
	50	DFT-S	QPSK	25.99	25.97
	50	DFT-S	16QAM	22.41	23.89
	50	DFT-S	64QAM	21.17	21.50
	100	DFT-S	BPSK	26.72	26.51
	100	DFT-S	QPSK	26.62	26.50
	100	DFT-S	16QAM	25.42	24.34
	100	DFT-S	64QAM	22.56	22.51
	200	DFT-S	BPSK	21.48	24.40
	200	DFT-S	QPSK	21.09	24.48
	200	DFT-S	16QAM	21.17	23.75
	200	DFT-S	64QAM	21.77	21.79

Note :The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



NR Band n261 Module 0 AG1 (Beam ID:147)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Lowest	50	DFT-S	BPSK	25.53	25.62
	50	DFT-S	QPSK	25.12	25.64
	50	DFT-S	16QAM	22.95	23.24
	50	DFT-S	64QAM	20.93	21.17
	100	DFT-S	BPSK	26.73	26.62
	100	DFT-S	QPSK	26.11	26.64
	100	DFT-S	16QAM	24.06	24.59
	100	DFT-S	64QAM	22.26	22.46
	200	DFT-S	BPSK	19.00	22.04
	200	DFT-S	QPSK	19.41	22.08
	200	DFT-S	16QAM	18.51	21.56
	200	DFT-S	64QAM	18.90	19.41

Note :The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



NR Band n261 Module 0 AG1 (Beam ID:147)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Middle	50	DFT-S	BPSK	23.41	23.21
	50	DFT-S	QPSK	23.24	23.24
	50	DFT-S	16QAM	21.61	21.14
	50	DFT-S	64QAM	18.87	18.86
	100	DFT-S	BPSK	24.53	23.51
	100	DFT-S	QPSK	24.47	23.13
	100	DFT-S	16QAM	20.23	21.57
	100	DFT-S	64QAM	20.28	19.60
	200	DFT-S	BPSK	17.95	20.90
	200	DFT-S	QPSK	17.46	20.94
	200	DFT-S	16QAM	17.59	20.26
	200	DFT-S	64QAM	18.04	18.23

Note :The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



NR Band n261 Module 0 AG1 (Beam ID:147)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Highest	50	DFT-S	BPSK	22.90	23.48
	50	DFT-S	QPSK	23.33	23.17
	50	DFT-S	16QAM	21.12	21.26
	50	DFT-S	64QAM	18.20	18.77
	100	DFT-S	BPSK	24.28	24.04
	100	DFT-S	QPSK	23.85	24.18
	100	DFT-S	16QAM	21.98	22.27
	100	DFT-S	64QAM	19.69	20.00
	200	DFT-S	BPSK	16.82	19.73
	200	DFT-S	QPSK	16.37	19.65
	200	DFT-S	16QAM	16.77	19.19
	200	DFT-S	64QAM	16.62	17.08

Note :The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



NR Band n261 Module 0 AG0+1 (Beam ID:19+147)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Lowest	50	DFT-S	BPSK	28.16	27.59
	50	DFT-S	QPSK	28.27	27.55
	50	DFT-S	16QAM	26.37	25.49
	50	DFT-S	64QAM	23.75	23.19
	100	DFT-S	BPSK	28.62	27.93
	100	DFT-S	QPSK	28.93	28.03
	100	DFT-S	16QAM	26.83	26.05
	100	DFT-S	64QAM	23.82	23.82
	200	DFT-S	BPSK	18.73	22.50
	200	DFT-S	QPSK	18.71	22.56
	200	DFT-S	16QAM	19.03	21.95
	200	DFT-S	64QAM	19.28	19.99

Note :The 200MHz Bw is carrier aggregation by 2CC of 100MHz.




NR Band n261 Module 0 AG0+1 (Beam ID:19+147)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Middle	50	DFT-S	BPSK	25.93	25.52
	50	DFT-S	QPSK	26.11	25.47
	50	DFT-S	16QAM	24.01	23.51
	50	DFT-S	64QAM	21.57	21.07
	100	DFT-S	BPSK	27.42	26.41
	100	DFT-S	QPSK	27.39	26.48
	100	DFT-S	16QAM	25.24	24.54
	100	DFT-S	64QAM	23.07	22.43
	200	DFT-S	BPSK	19.56	22.98
	200	DFT-S	QPSK	19.41	23.05
	200	DFT-S	16QAM	19.53	22.64
	200	DFT-S	64QAM	19.74	20.53

Note :The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



NR Band n261 Module 0 AG0+1 (Beam ID:19+147)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Highest	50	DFT-S	BPSK	26.80	26.43
	50	DFT-S	QPSK	26.77	26.26
	50	DFT-S	16QAM	24.72	24.36
	50	DFT-S	64QAM	22.33	22.10
	100	DFT-S	BPSK	28.69	27.78
	100	DFT-S	QPSK	28.96	27.82
	100	DFT-S	16QAM	26.63	25.80
	100	DFT-S	64QAM	24.35	23.86
	100	CP	QPSK	24.1	23.82
	100	CP	16QAM	21.03	21.65
	100	CP	64QAM	19.44	19.14
	200	DFT-S	BPSK	21.50	23.17
	200	DFT-S	QPSK	21.26	23.09
	200	DFT-S	16QAM	21.44	22.54
	200	DFT-S	64QAM	21.35	20.58

Note :The 200MHz Bw is carrier aggregation by 2CC of 100MHz.

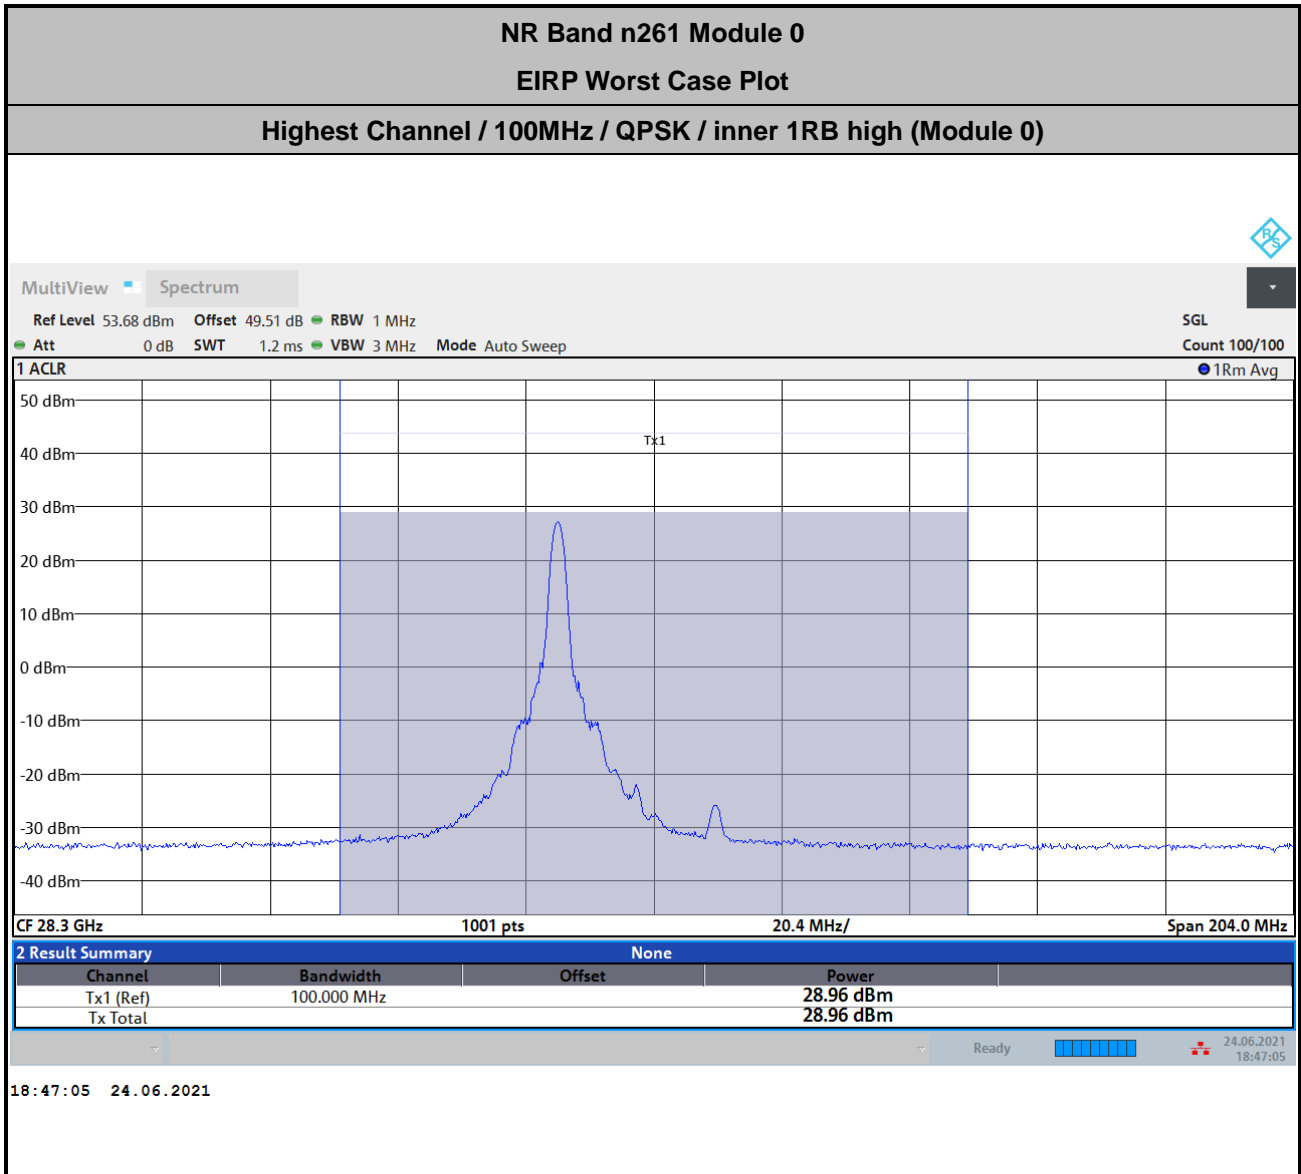

$$\begin{aligned} \text{Offset} &= \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8 \\ &= 39.6 + 7.71 + 107 + 20\log(1) - 104.8 = 49.51 \text{ (dB)} \end{aligned}$$



NR Band n261 Module 1

NR Band n261 Module 1 AG0 (Beam ID:14)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Lowest	50	DFT-S	BPSK	22.48	22.65
	50	DFT-S	QPSK	22.14	22.61
	50	DFT-S	16QAM	20.54	20.83
	50	DFT-S	64QAM	18.03	18.71
	100	DFT-S	BPSK	23.28	23.16
	100	DFT-S	QPSK	23.00	23.11
	100	DFT-S	16QAM	21.62	21.04
	100	DFT-S	64QAM	18.92	18.90
	200	DFT-S	BPSK	16.72	19.13
	200	DFT-S	QPSK	16.63	19.08
	200	DFT-S	16QAM	16.74	18.65
	200	DFT-S	64QAM	15.63	16.39

Note :The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



NR Band n261 Module 1 AG0 (Beam ID:14)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Middle	50	DFT-S	BPSK	21.63	21.65
	50	DFT-S	QPSK	21.52	21.70
	50	DFT-S	16QAM	19.55	19.25
	50	DFT-S	64QAM	18.02	17.73
	100	DFT-S	BPSK	22.46	22.55
	100	DFT-S	QPSK	22.65	22.47
	100	DFT-S	16QAM	20.65	20.32
	100	DFT-S	64QAM	19.04	18.32
	200	DFT-S	BPSK	16.50	18.94
	200	DFT-S	QPSK	16.55	18.83
	200	DFT-S	16QAM	16.53	18.60
	200	DFT-S	64QAM	16.62	16.34

Note :The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



NR Band n261 Module 1 AG0 (Beam ID: 14)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Highest	50	DFT-S	BPSK	21.95	22.34
	50	DFT-S	QPSK	21.97	21.81
	50	DFT-S	16QAM	20.10	19.46
	50	DFT-S	64QAM	18.32	17.92
	100	DFT-S	BPSK	23.15	20.91
	100	DFT-S	QPSK	23.09	20,90
	100	DFT-S	16QAM	21.07	19.23
	100	DFT-S	64QAM	19.48	17.16
	200	DFT-S	BPSK	16.21	19.38
	200	DFT-S	QPSK	16.15	19.43
	200	DFT-S	16QAM	16.31	18.83
	200	DFT-S	64QAM	16.42	16.80

Note :The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



NR Band n261 Module 1 AG1 (Beam ID:142)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Lowest	50	DFT-S	BPSK	23.95	24.25
	50	DFT-S	QPSK	24.71	24.11
	50	DFT-S	16QAM	22.23	21.92
	50	DFT-S	64QAM	20.38	19.95
	100	DFT-S	BPSK	24.25	24.25
	100	DFT-S	QPSK	24.59	24.07
	100	DFT-S	16QAM	22.13	22.10
	100	DFT-S	64QAM	20.24	19.92
	200	DFT-S	BPSK	17.83	20.81
	200	DFT-S	QPSK	17.67	20.75
	200	DFT-S	16QAM	17.32	20.45
	200	DFT-S	64QAM	17.28	18.08

Note :The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



NR Band n261 Module 1 AG1 (Beam ID: 142)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Middle	50	DFT-S	BPSK	20.81	21.34
	50	DFT-S	QPSK	21.12	21.22
	50	DFT-S	16QAM	18.71	19.14
	50	DFT-S	64QAM	17.34	17.43
	100	DFT-S	BPSK	21.56	22.10
	100	DFT-S	QPSK	21.77	21.98
	100	DFT-S	16QAM	19.58	19.90
	100	DFT-S	64QAM	18.35	17.87
	200	DFT-S	BPSK	17.06	19.06
	200	DFT-S	QPSK	16.54	19.65
	200	DFT-S	16QAM	16.99	18.64
	200	DFT-S	64QAM	17.05	17.11

Note :The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



NR Band n261 Module 1 AG1 (Beam ID:142)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Highest	50	DFT-S	BPSK	20.56	21.36
	50	DFT-S	QPSK	21.11	21.17
	50	DFT-S	16QAM	18.73	18.93
	50	DFT-S	64QAM	17.06	17.37
	100	DFT-S	BPSK	22.79	22.48
	100	DFT-S	QPSK	22.60	22.32
	100	DFT-S	16QAM	20.38	20.40
	100	DFT-S	64QAM	18.63	17.94
	200	DFT-S	BPSK	16.82	19.36
	200	DFT-S	QPSK	16.43	19.38
	200	DFT-S	16QAM	16.47	18.90
	200	DFT-S	64QAM	16.34	16.83

Note :The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



NR Band n261 Module 1 AG0+1 (Beam ID: 14&142)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Lowest	50	DFT-S	BPSK	23.81	24.47
	50	DFT-S	QPSK	23.77	24.72
	50	DFT-S	16QAM	21.18	22.60
	50	DFT-S	64QAM	20.12	20.65
	100	DFT-S	BPSK	24.32	24.66
	100	DFT-S	QPSK	24.32	24.67
	100	DFT-S	16QAM	21.84	22.57
	100	DFT-S	64QAM	20.59	20.47
	200	DFT-S	BPSK	16.92	22.08
	200	DFT-S	QPSK	16.72	22.08
	200	DFT-S	16QAM	15.69	21.33
	200	DFT-S	64QAM	16.76	19.45

Note :The 200MHz Bw is carrier aggregation by 2CC of 100MHz.




NR Band n261 Module 1 AG0+1 (Beam ID:14&142)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Middle	50	DFT-S	BPSK	23.83	23.95
	50	DFT-S	QPSK	23.98	23.83
	50	DFT-S	16QAM	21.66	21.80
	50	DFT-S	64QAM	20.23	19.82
	100	DFT-S	BPSK	23.51	23.21
	100	DFT-S	QPSK	23.49	23.18
	100	DFT-S	16QAM	21.56	21.20
	100	DFT-S	64QAM	19.91	19.20
	200	DFT-S	BPSK	17.78	19.65
	200	DFT-S	QPSK	18.20	19.58
	200	DFT-S	16QAM	16.97	19.01
	200	DFT-S	64QAM	18.13	16.84

Note :The 200MHz Bw is carrier aggregation by 2CC of 100MHz.



NR Band n261 Module 1 AG0+1 (Beam ID: 14&142)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Highest	50	DFT-S	BPSK	23.92	24.04
	50	DFT-S	QPSK	24.01	24.00
	50	DFT-S	16QAM	21.49	22.18
	50	DFT-S	64QAM	19.96	20.17
	100	DFT-S	BPSK	24.85	24.36
	100	DFT-S	QPSK	25.04	24.25
	100	DFT-S	16QAM	22.94	22.25
	100	DFT-S	64QAM	21.00	19.98
	100	CP	QPSK	18.94	21.23
	100	CP	16QAM	20.13	21.06
	100	CP	64QAM	18.8	18.56
	200	DFT-S	BPSK	18.39	19.98
	200	DFT-S	QPSK	17.85	20.06
	200	DFT-S	16QAM	17.94	19.16
	200	DFT-S	64QAM	18.56	17.21

Note :The 200MHz Bw is carrier aggregation by 2CC of 100MHz.

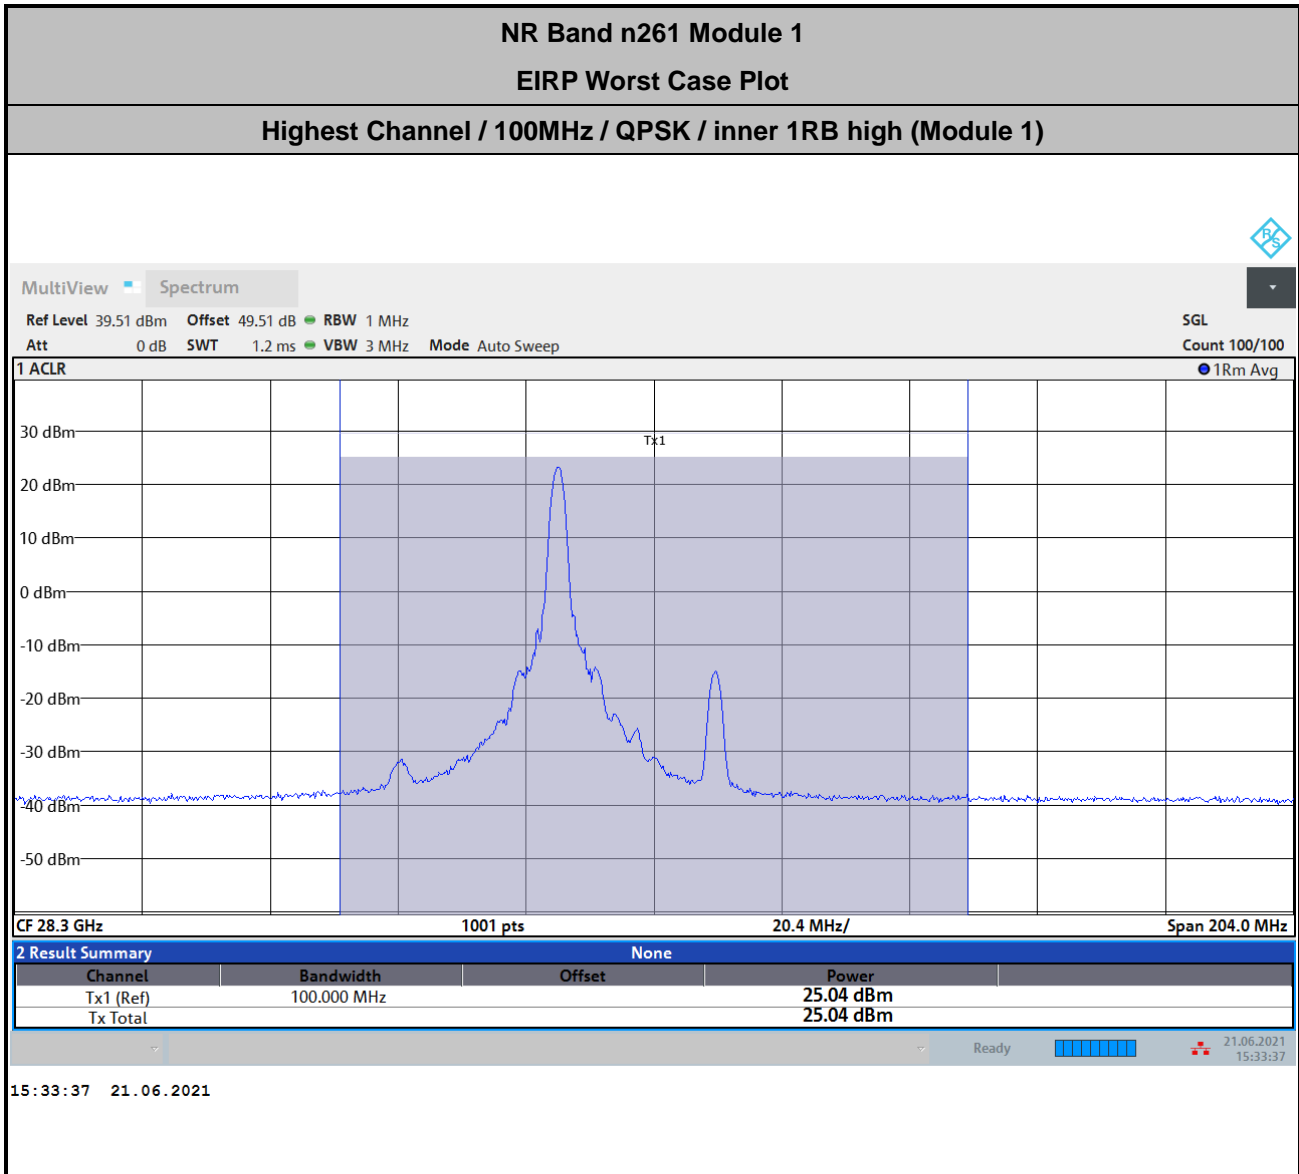

$$\text{Offset} = \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8$$

$$= 39.6 + 7.71 + 107 + 20\log(1) - 104.8 = 49.51 \text{ (dB)}$$



NR Band n260 Module 0

AG0

Occupied Bandwidth


Mode	DFT-s-OFDM Module 0 NR Band n260 : 99%OBW(MHz)											
BW	50MHz				100MHz				200MHz			
Mod.	BPSK	QPSK	16QAM	64QAM	BPSK	QPSK	16QAM	64QAM	BPSK	QPSK	16QAM	64QAM
Lowest CH	45.46	45.48	45.30	45.42	90.36	90.92	90.59	90.48	187.23	187.08	187.31	187.85
Middle CH	45.45	45.49	45.23	45.39	90.69	90.49	90.73	90.92	185.87	185.63	186.52	187.85
Highest CH	45.51	45.38	45.13	45.48	90.24	90.94	90.51	90.59	187.32	186.92	187.79	187.87




DFT-s-OFDM Module 0

NR Band n260


Lowest Channel / 50MHz / BPSK

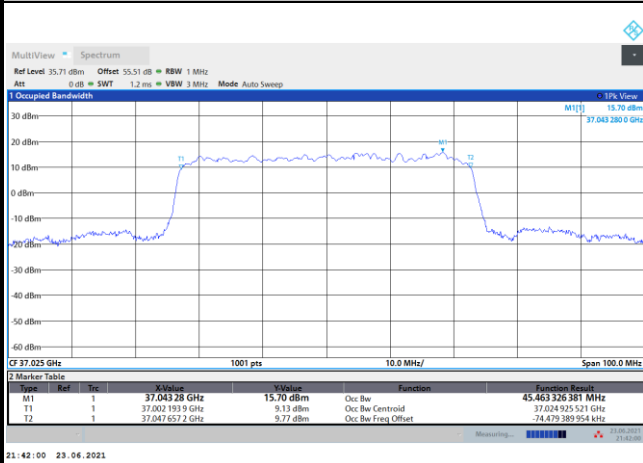


Lowest Channel / 50MHz / QPSK

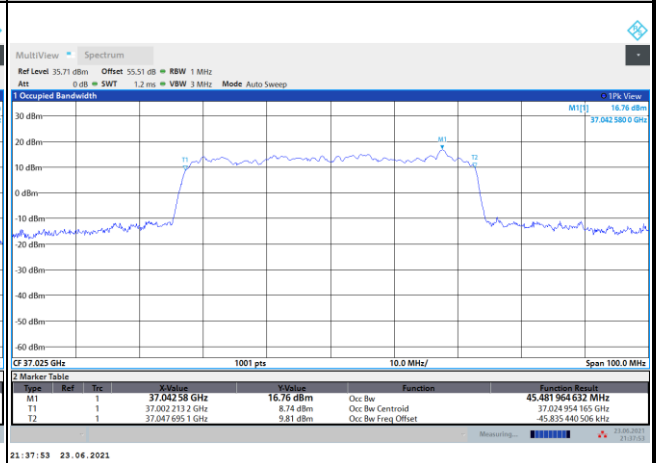


Middle Channel / 50MHz / BPSK

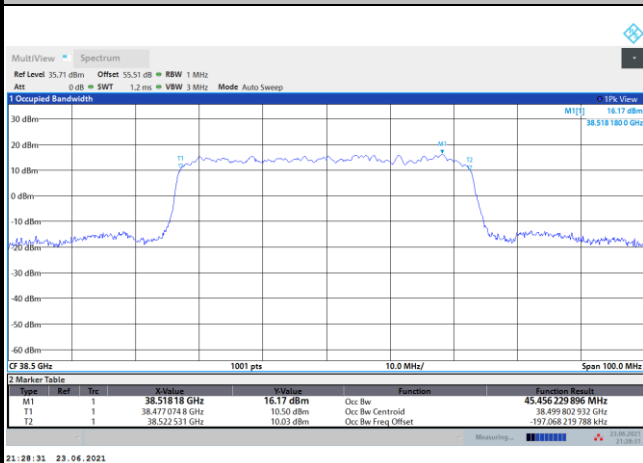


Middle Channel / 50MHz / QPSK

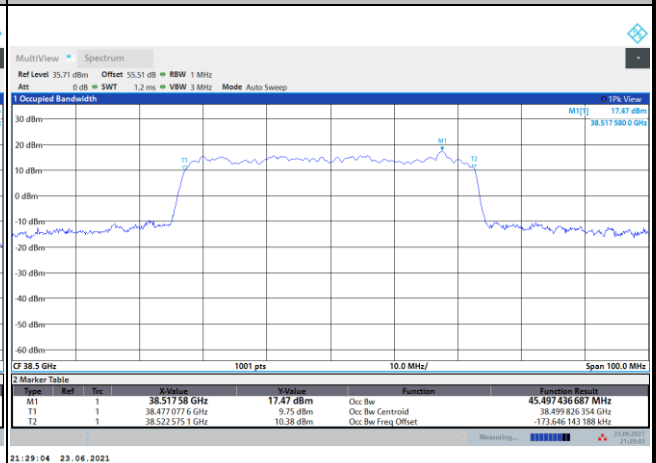

Highest Channel / 50MHz / BPSK

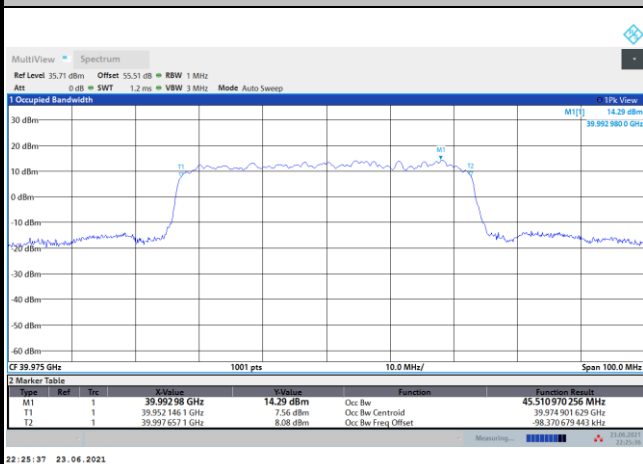

Highest Channel / 50MHz / QPSK

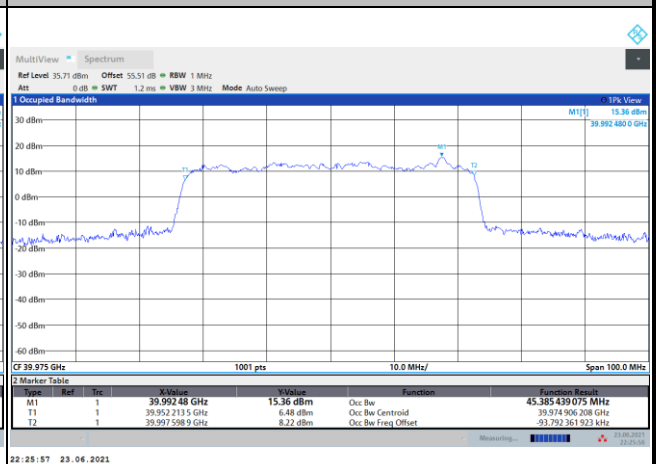





DFT-s-OFDM Module 0

NR Band n260


Lowest Channel / 50MHz / 16QAM

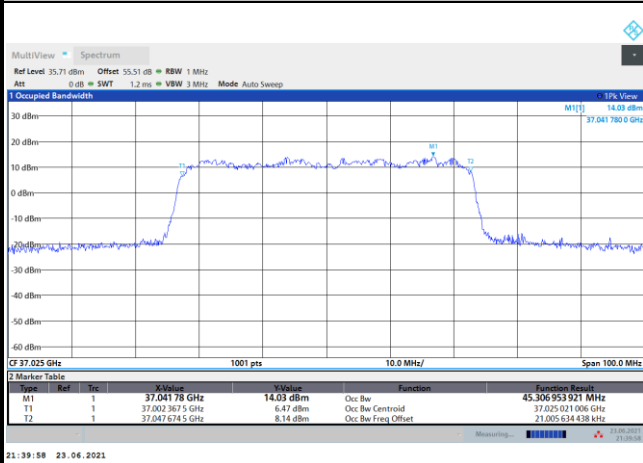


Lowest Channel / 50MHz / 64QAM

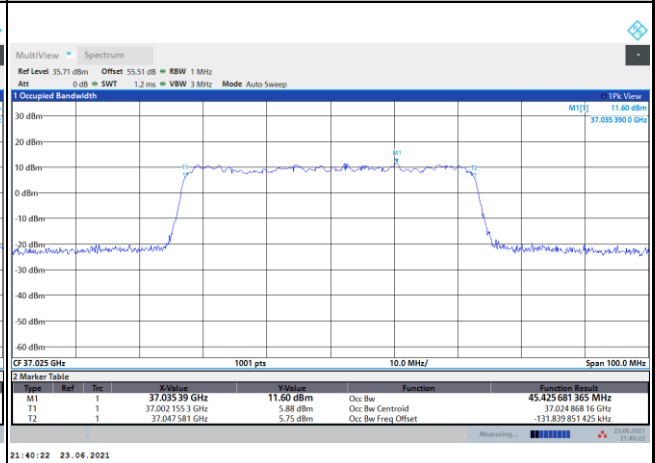


Middle Channel / 50MHz / 16QAM

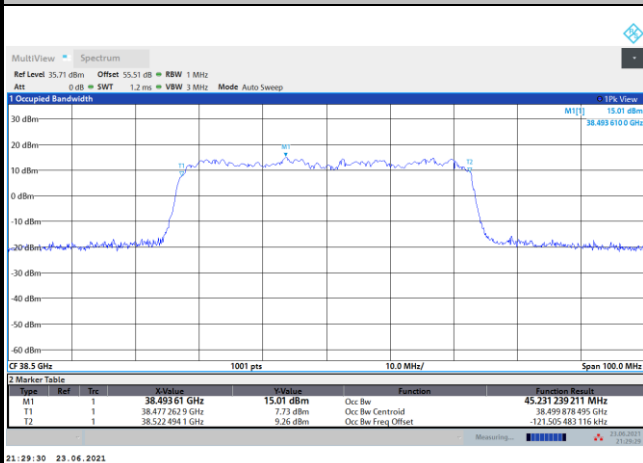


Middle Channel / 50MHz / 64QAM

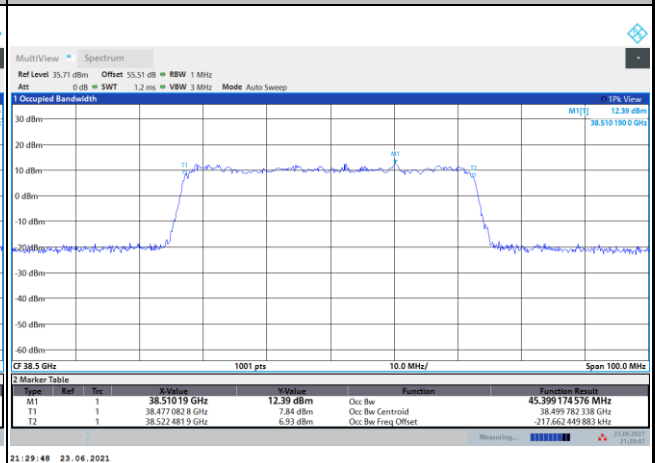

Highest Channel / 50MHz / 16QAM

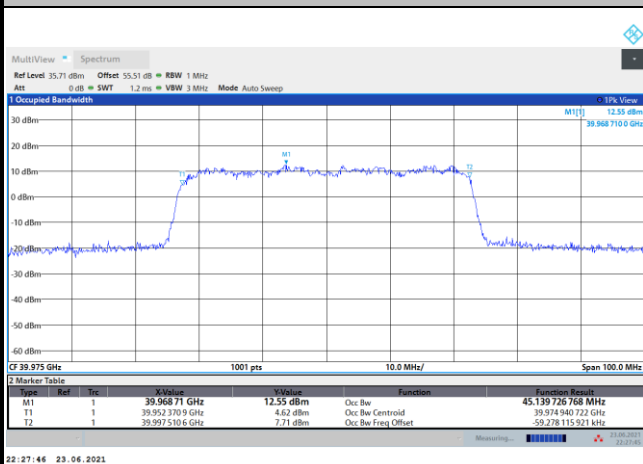

Highest Channel / 50MHz / 64QAM

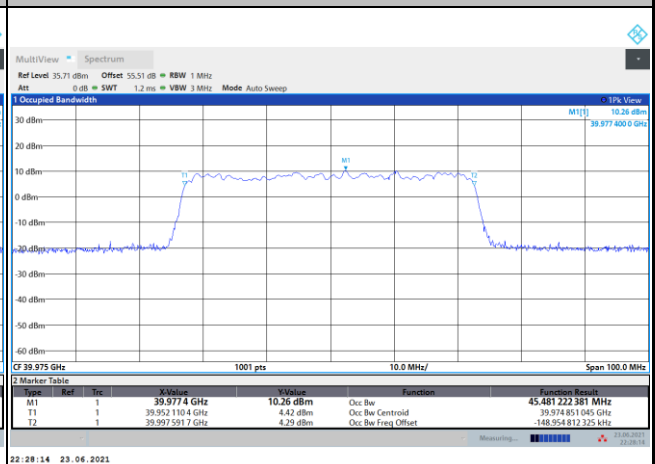





DFT-s-OFDM Module 0

NR Band n260


Lowest Channel / 100MHz / BPSK

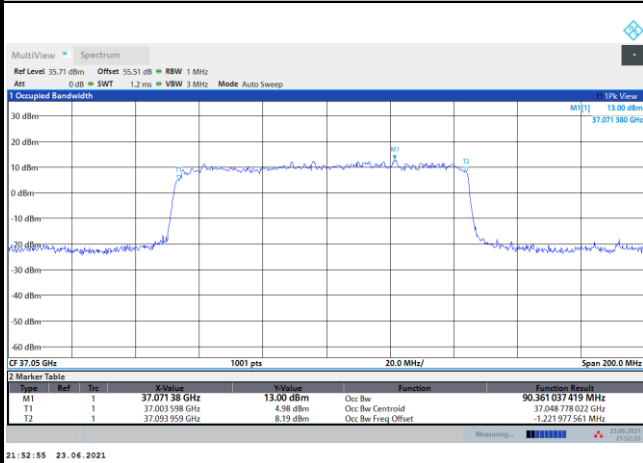


Lowest Channel / 100MHz / QPSK

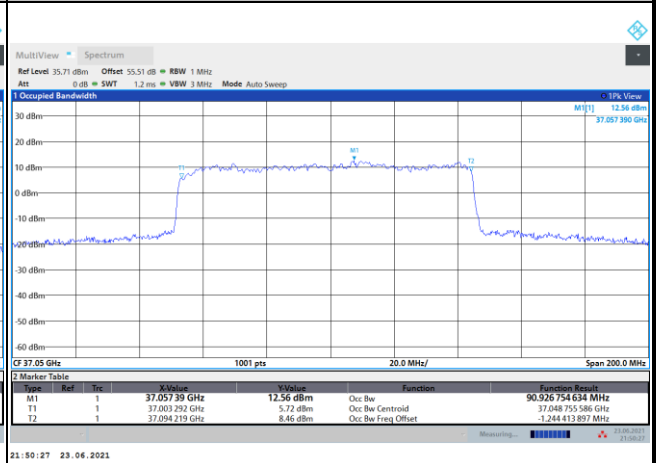


Middle Channel / 100MHz / BPSK

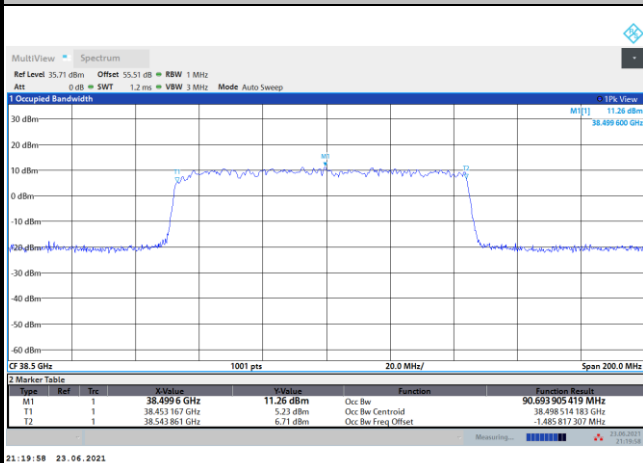


Middle Channel / 100MHz / QPSK

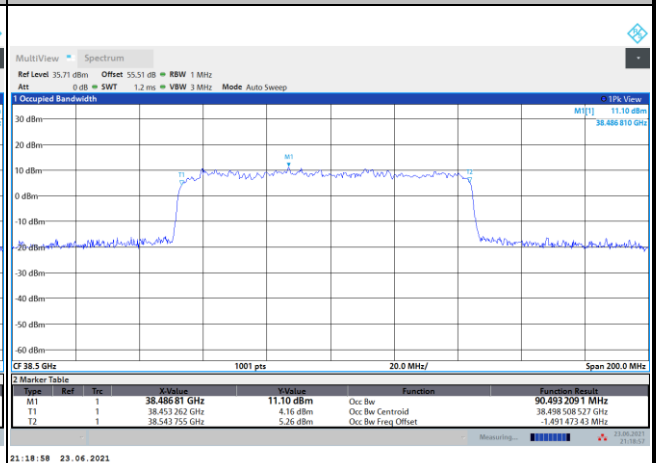

Highest Channel / 100MHz / BPSK

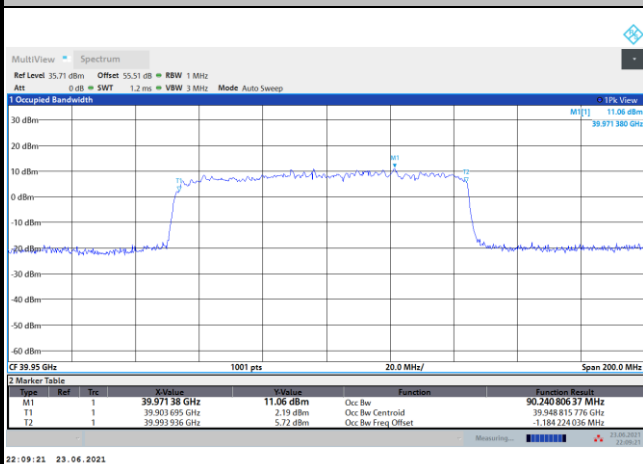

Highest Channel / 100MHz / QPSK

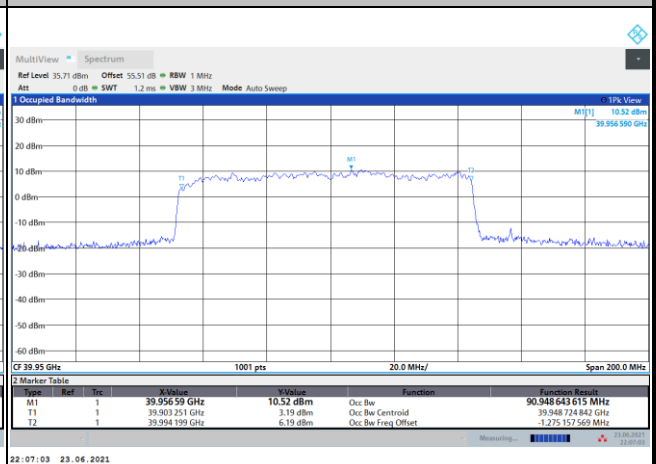





DFT-s-OFDM Module 0

NR Band n260


Lowest Channel / 100MHz / 16QAM

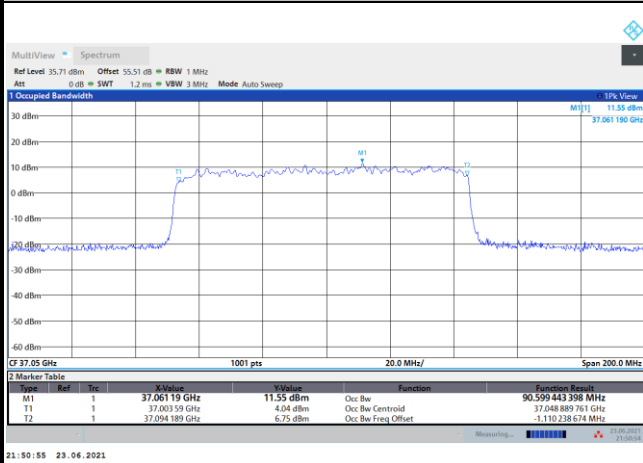


Lowest Channel / 100MHz / 64QAM

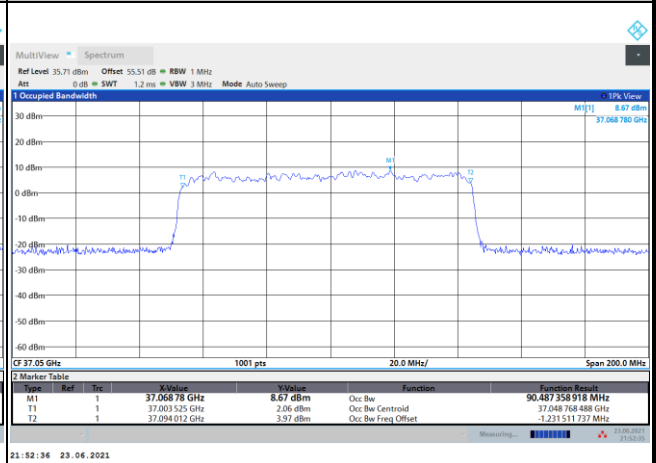


Middle Channel / 100MHz / 16QAM

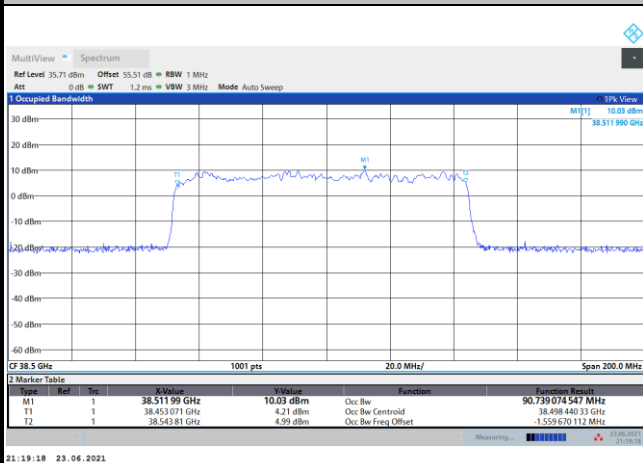


Middle Channel / 100MHz / 64QAM

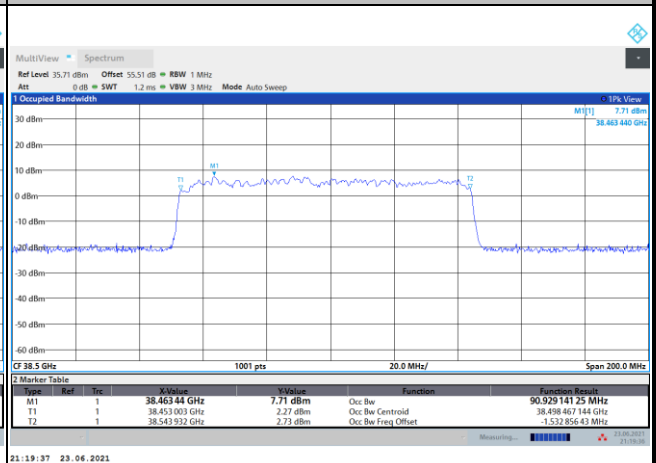

Highest Channel / 100MHz / 16QAM

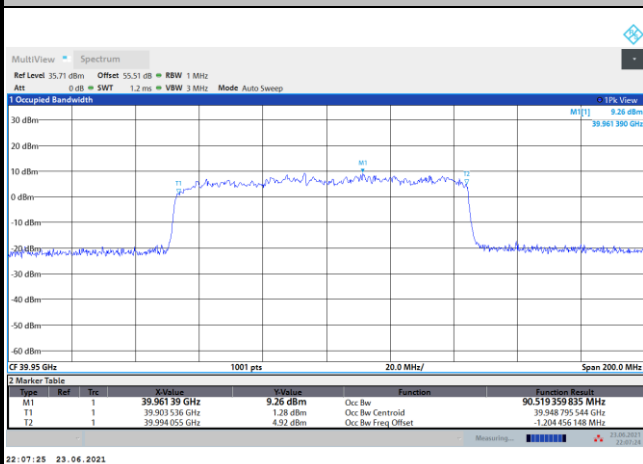

Highest Channel / 100MHz / 64QAM

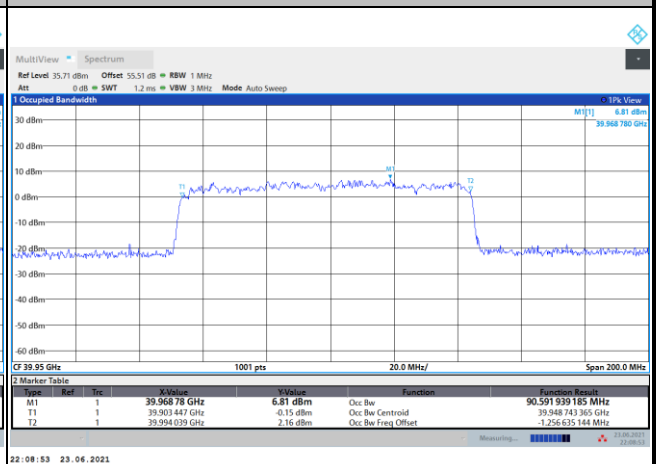





DFT-s-OFDM Module 0

NR Band n260


Lowest Channel / 200MHz / BPSK

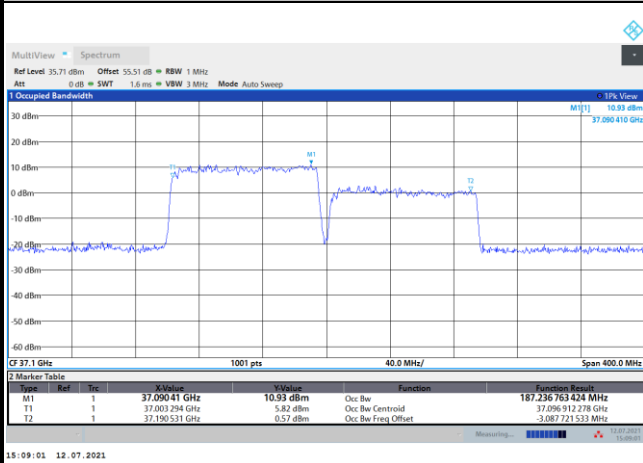


Lowest Channel / 200MHz / QPSK

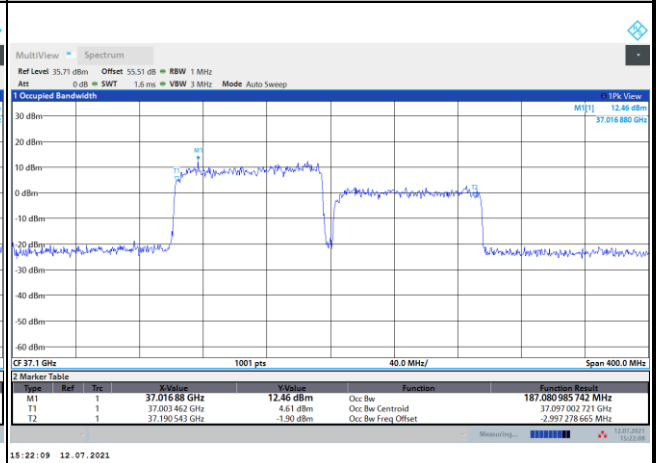


Middle Channel / 200MHz / BPSK

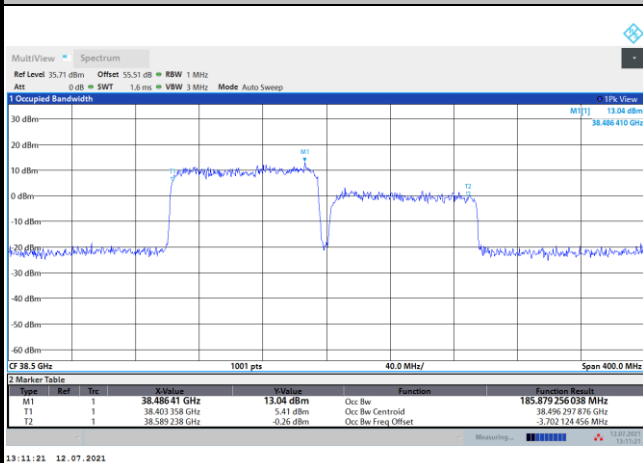


Middle Channel / 200MHz / QPSK

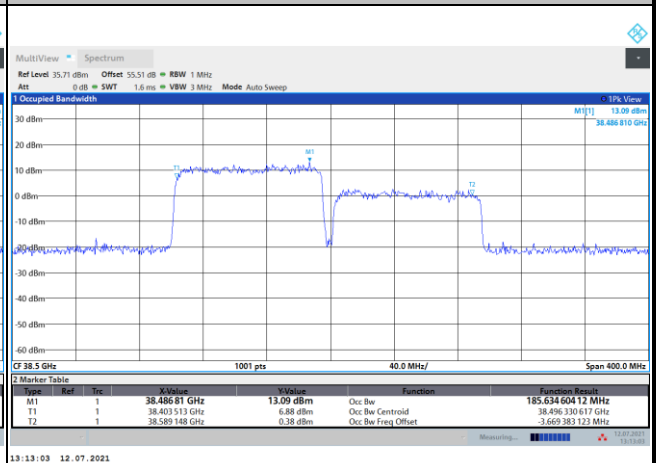

Highest Channel / 200MHz / BPSK

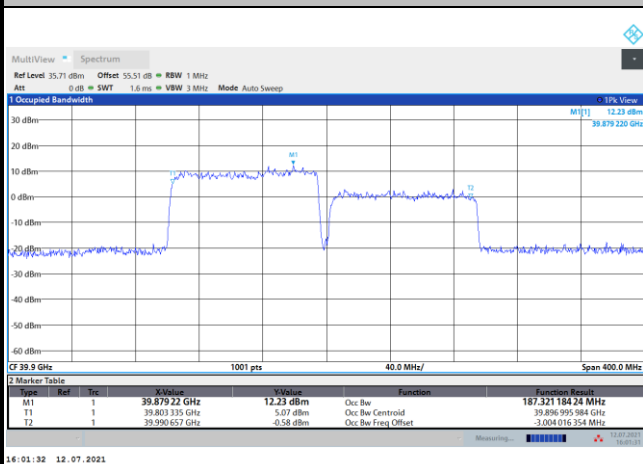

Highest Channel / 200MHz / QPSK

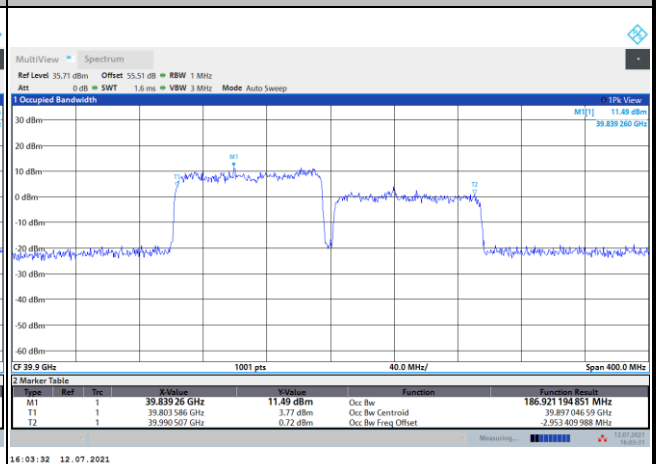





DFT-s-OFDM Module 0

NR Band n260


Lowest Channel / 200MHz / 16QAM

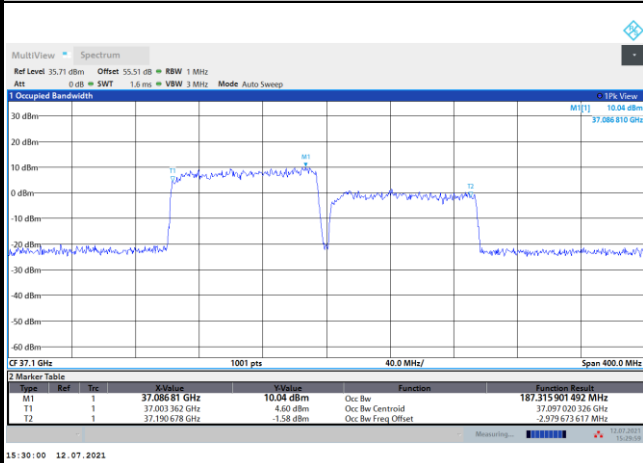


Lowest Channel / 200MHz / 64QAM

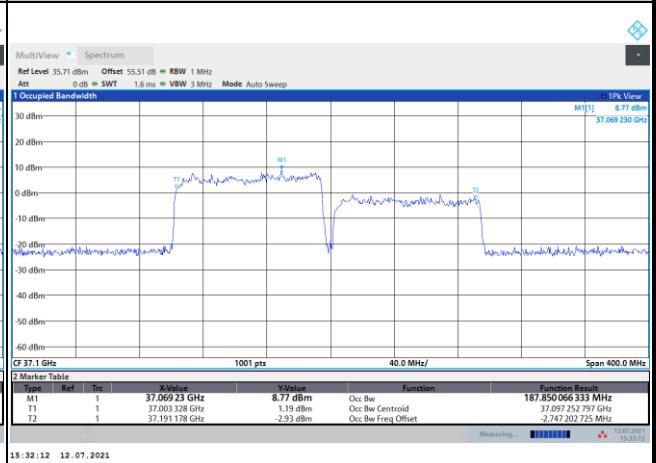


Middle Channel / 200MHz / 16QAM

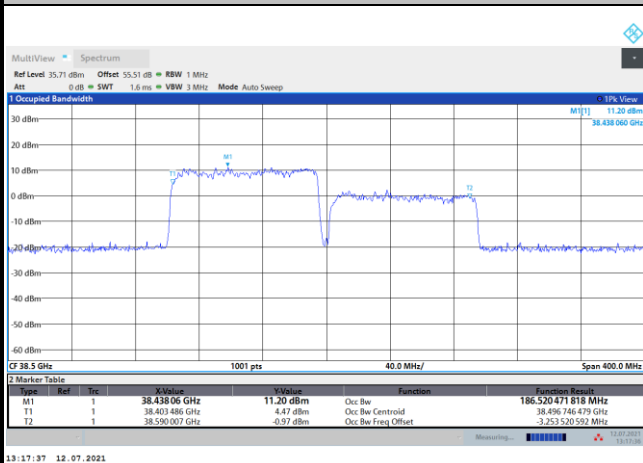


Middle Channel / 200MHz / 64QAM

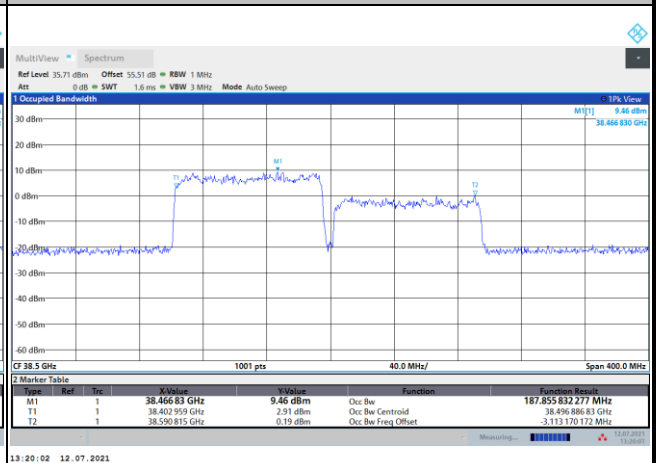

Highest Channel / 200MHz / 16QAM

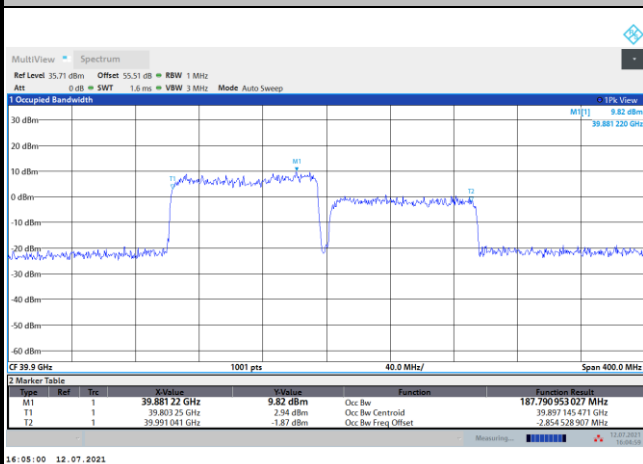

Highest Channel / 200MHz / 64QAM

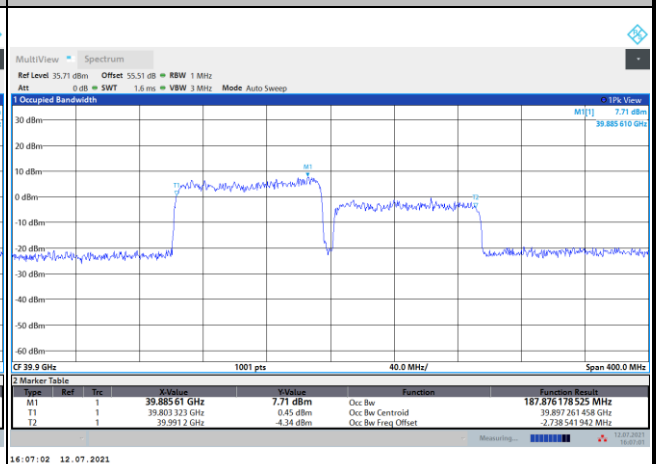



Radiated Out of Band Emissions

Mode			DFT-s-OFDM Module 0 NR Band n260 : BE (dBm) 1 RB											
BW			50MHz				100MHz				200MHz			
Limit (dBm)			BPSK	QPSK	16QAM	64QAM	BPSK	QPSK	16QAM	64QAM	BPSK	QPSK	16QAM	64QAM
Low CH	0~10%OB	≅ -5	-9.65	-9.64	-11.9	-15.47	-10.97	-11.55	-10.51	-14.7	-15.65	-15.18	-15.27	-14.78
	>10%OB	≅ -13	-25.63	-25.84	-27.2	-28.14	-27.68	-27.8	-28.18	-28.04	-25.77	-25.48	-25.2	-23.92
High CH	0~10%OB	≅ -5	-15.54	-15.4	-17.4	-19.43	-18.66	-16.22	-16.18	-18.36	-27.7	-28.32	-27.97	-27.66
	>10%OB	≅ -13	-24.65	-25.08	-25.76	-27.19	-26.48	-26.38	-26.24	-26.4	-27.63	-27.46	-27.71	-27.45
Result			Compliance											


Mode			DFT-s-OFDM Module 0 NR Band n260 : BE (dBm) Full RB											
BW			50MHz				100MHz				200MHz			
Limit (dBm)			BPSK	QPSK	16QAM	64QAM	BPSK	QPSK	16QAM	64QAM	BPSK	QPSK	16QAM	64QAM
Low CH	0~10%OB	≅ -5	-21.93	-19.21	-24.76	-27.08	-24.81	-21.47	-26.58	-27.62	-27.27	-27.37	-29.41	-30.18
	>10%OB	≅ -13	-24.75	-20.94	-27.16	-29.86	-27.09	-23.88	-27.44	-28.3	-29.43	-28.75	-30.16	-30.26
High CH	0~10%OB	≅ -5	-23.14	-20.75	-25.09	-27.22	-25.55	-22.62	-25.82	-26.87	-28.08	-28.06	-28.5	-28.78
	>10%OB	≅ -13	-25.09	-21.8	-25.97	-27.96	-26.45	-24.27	-26.55	-26.42	-27.77	-27.56	-27.57	-27.52
Result			Compliance											




DFT-s-OFDM Module 0

NR Band n260 / 50MHz / BPSK

Lowest Band Edge / 1 RB

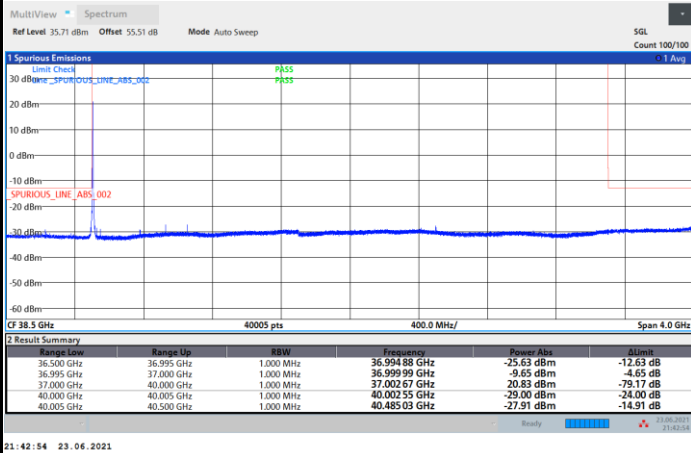


Highest Band Edge / 1 RB

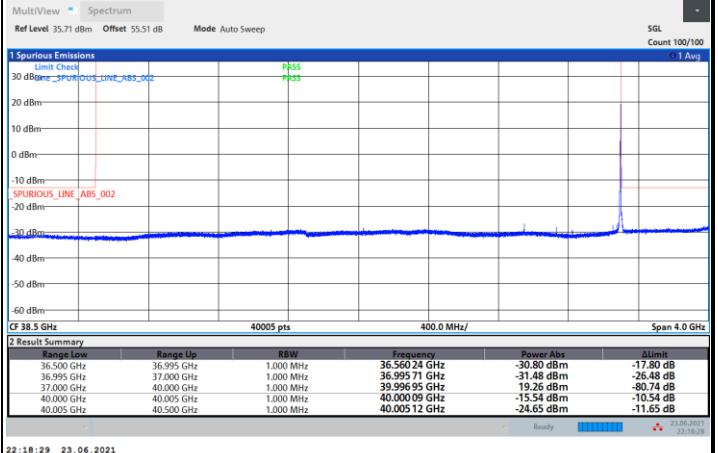


NR Band n260 / 50MHz / QPSK

Lowest Band Edge / 1 RB

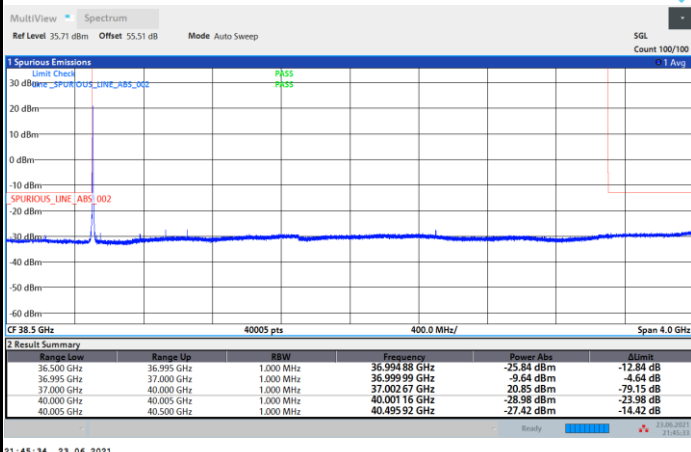

Highest Band Edge / 1 RB

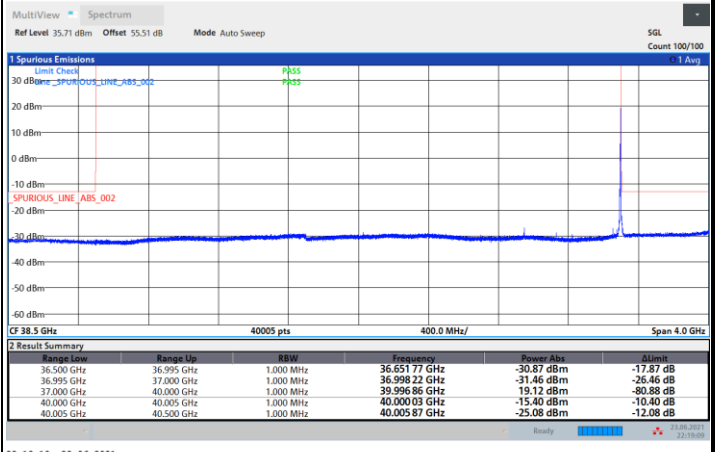





DFT-s-OFDM Module 0

NR Band n260 / 50MHz / 16QAM

Lowest Band Edge / 1 RB

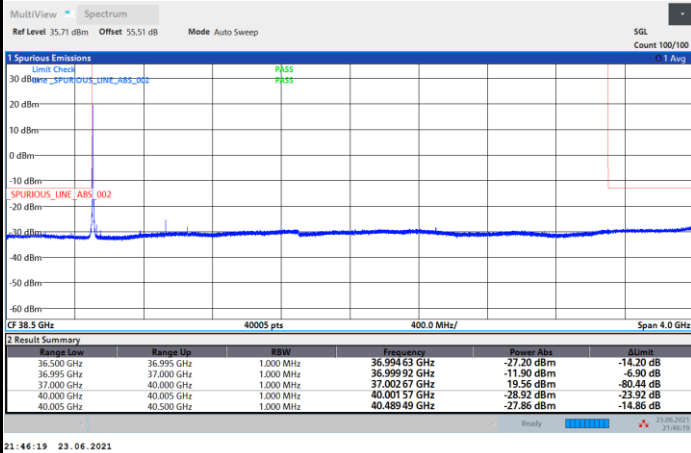


Highest Band Edge / 1 RB

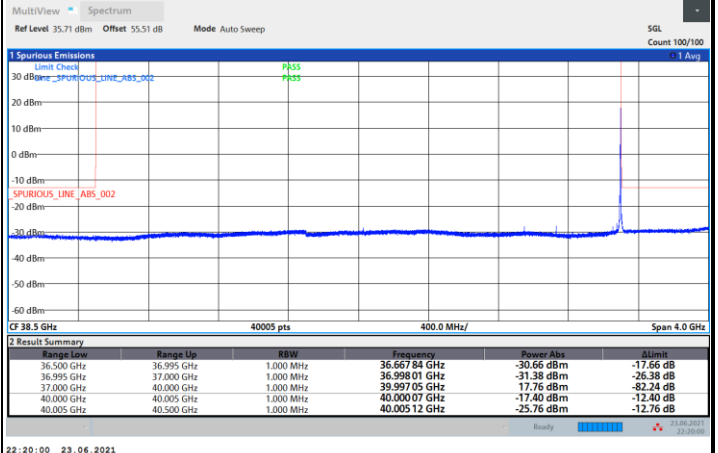

NR Band n260 / 50MHz / 64QAM

Lowest Band Edge / 1 RB


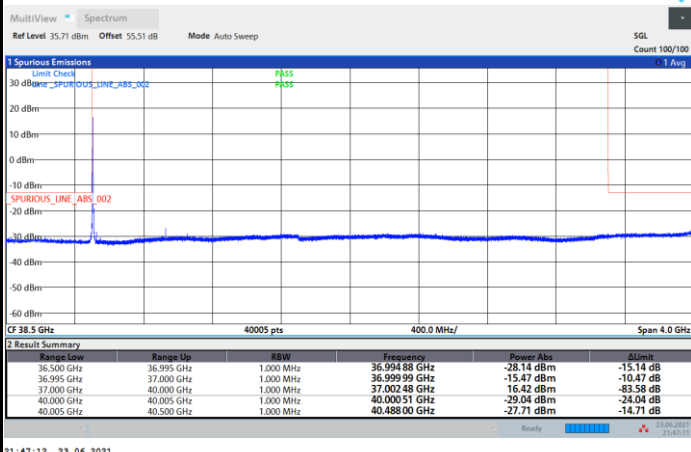


Highest Band Edge / 1 RB







DFT-s-OFDM Module 0

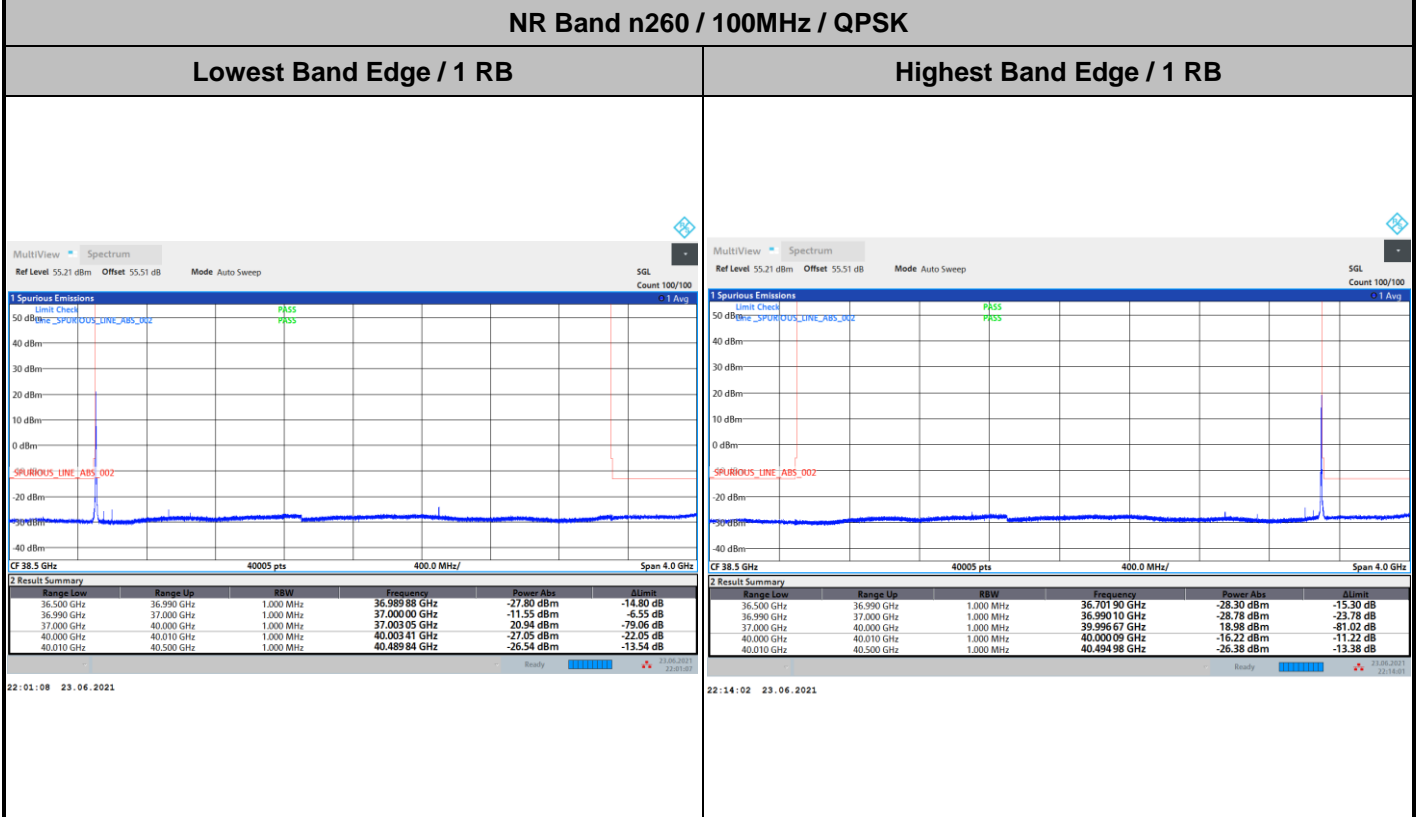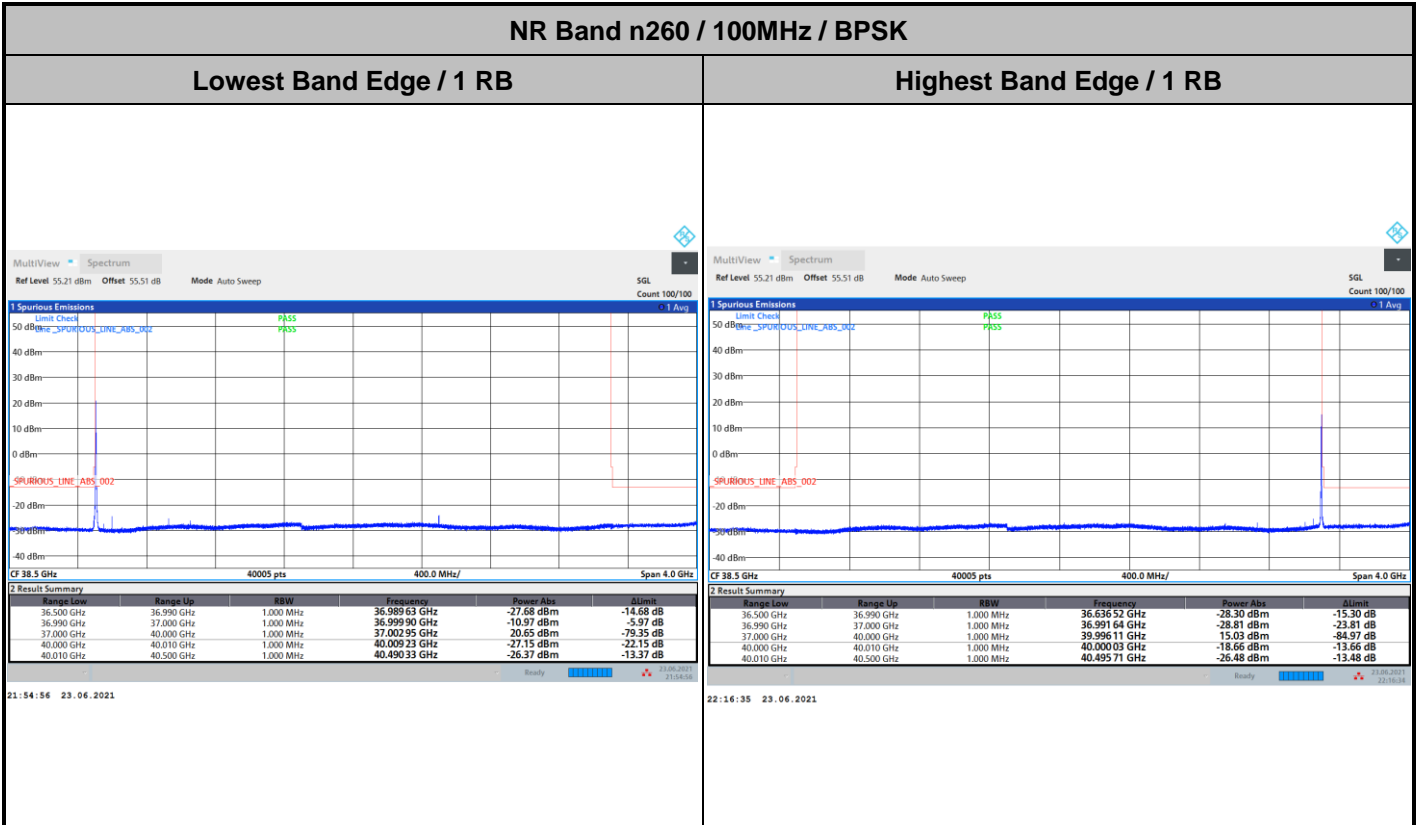





DFT-s-OFDM Module 0

NR Band n260 / 100MHz / 16QAM

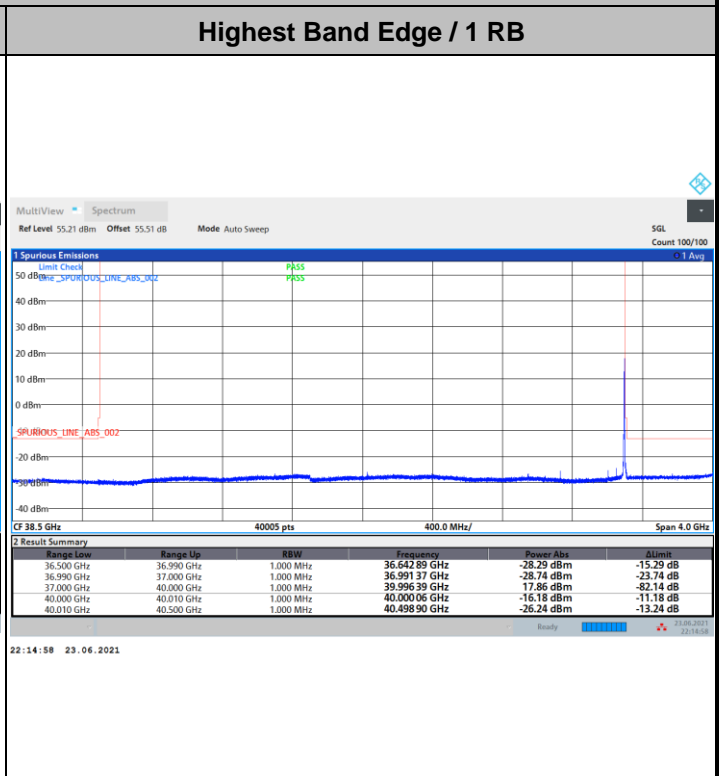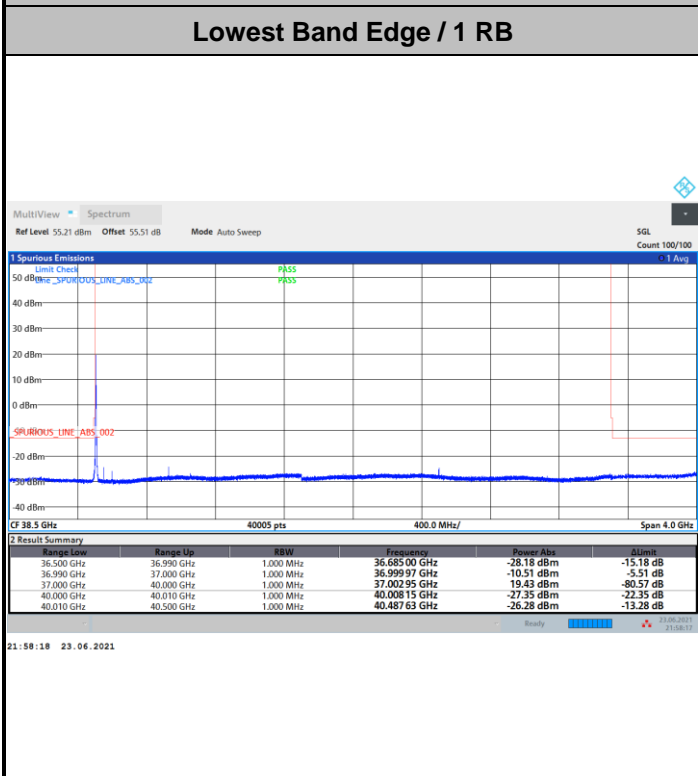

NR Band n260 / 100MHz / 64QAM

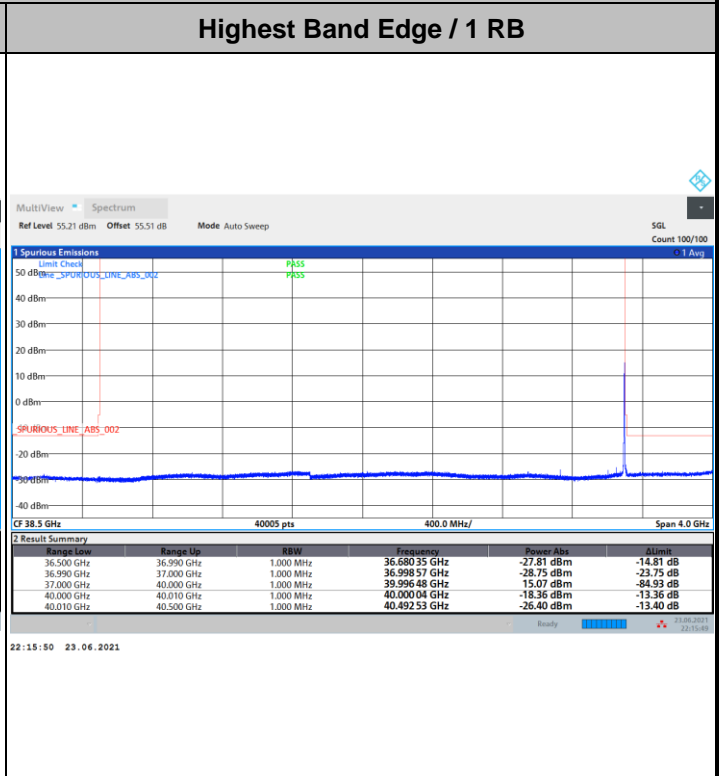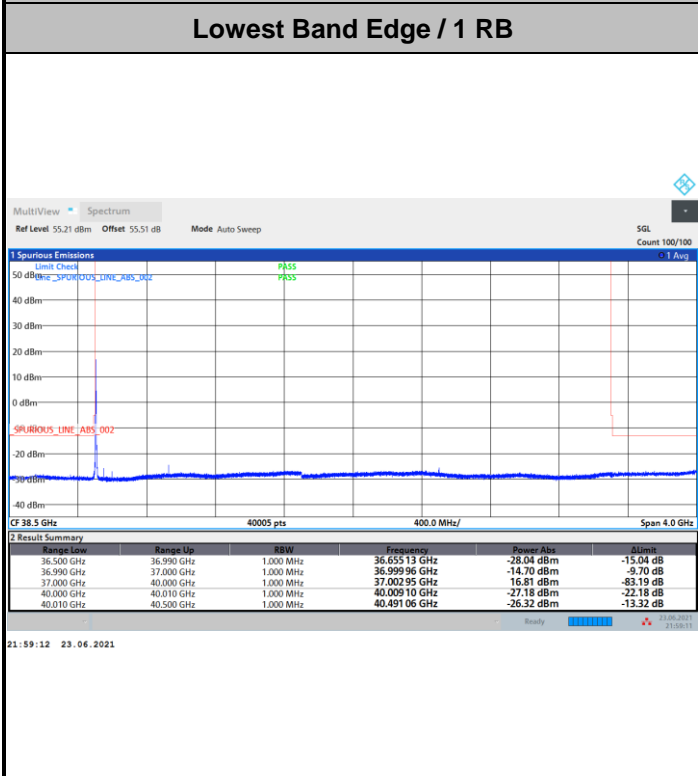





DFT-s-OFDM Module 0

NR Band n260 / 200MHz / BPSK

Lowest Band Edge / 1 RB

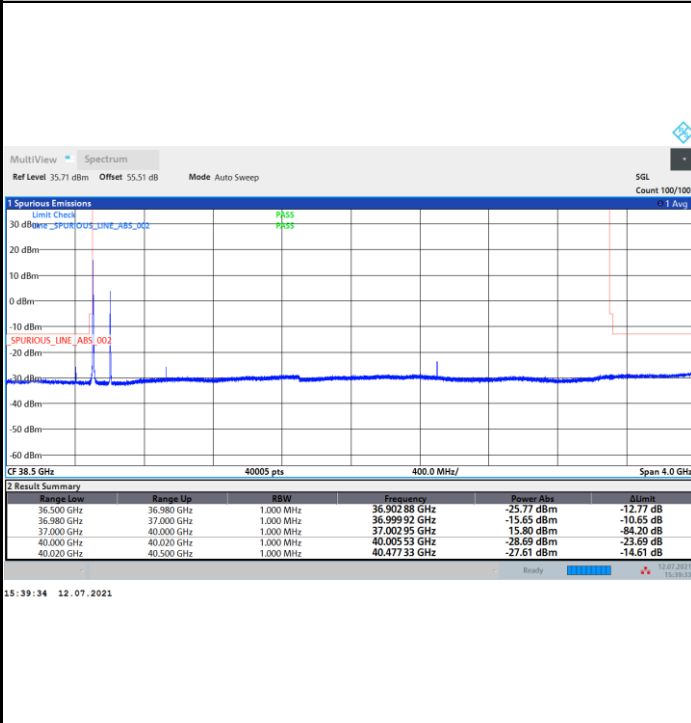


Highest Band Edge / 1 RB

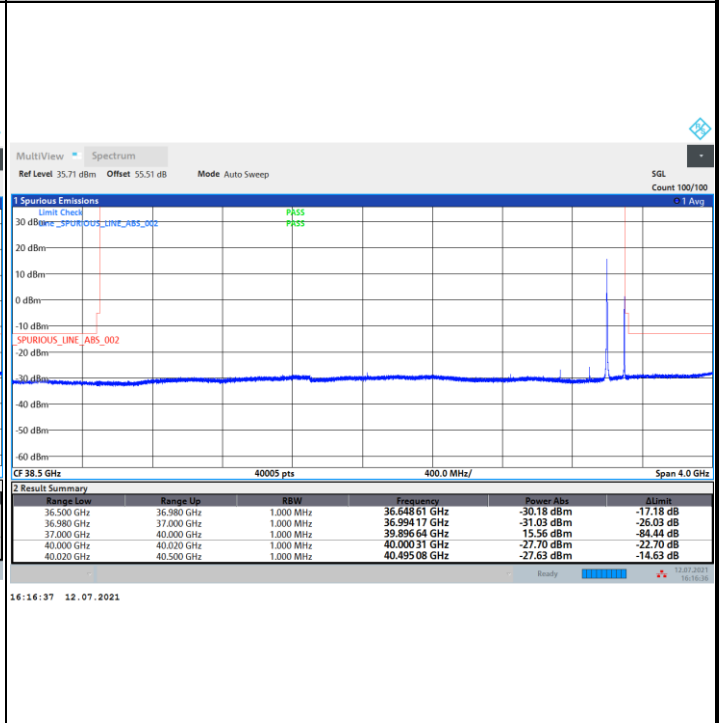


NR Band n260 / 200MHz / QPSK

Lowest Band Edge / 1 RB

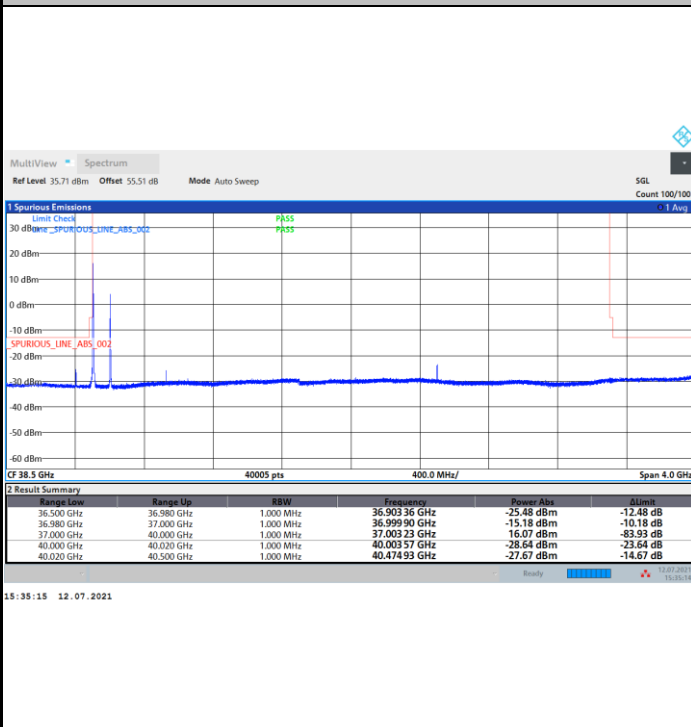

Highest Band Edge / 1 RB

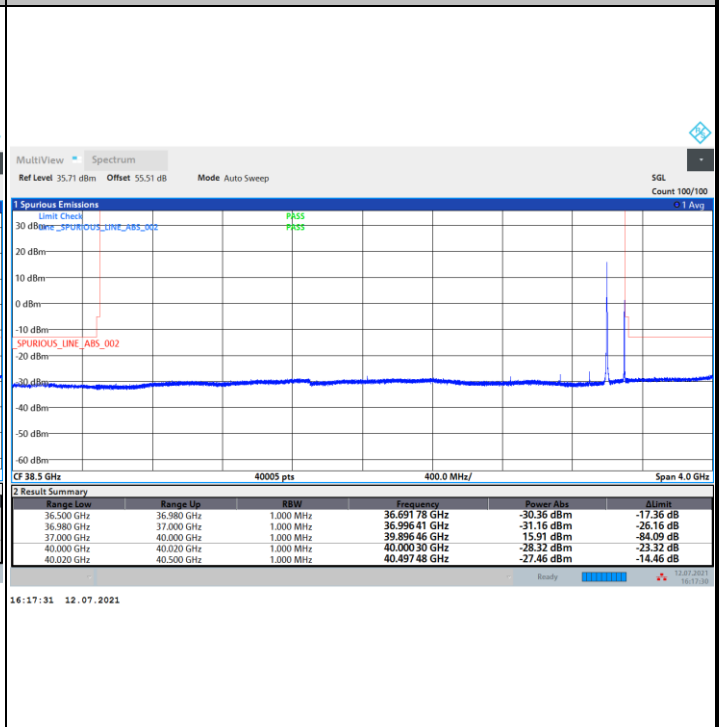





DFT-s-OFDM Module 0

NR Band n260 / 200MHz / 16QAM

Lowest Band Edge / 1 RB



Highest Band Edge / 1 RB

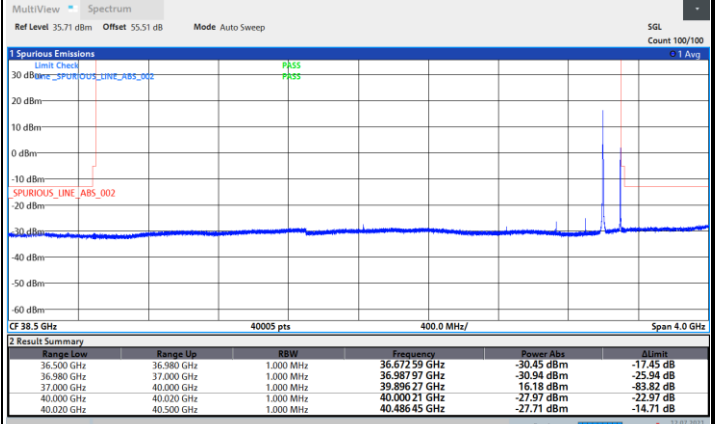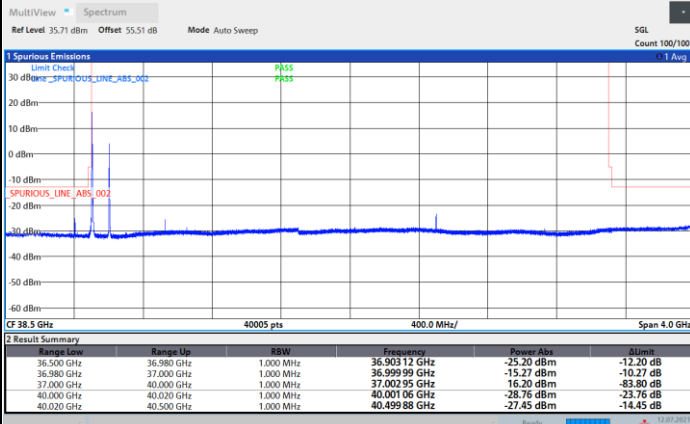

NR Band n260 / 200MHz / 64QAM

Lowest Band Edge / 1 RB

Highest Band Edge / 1 RB

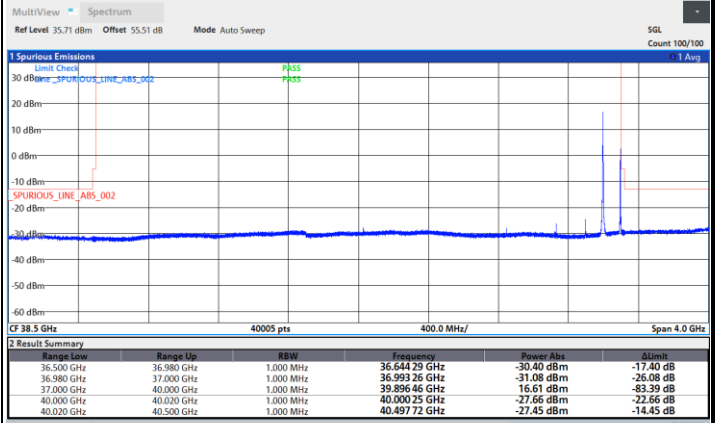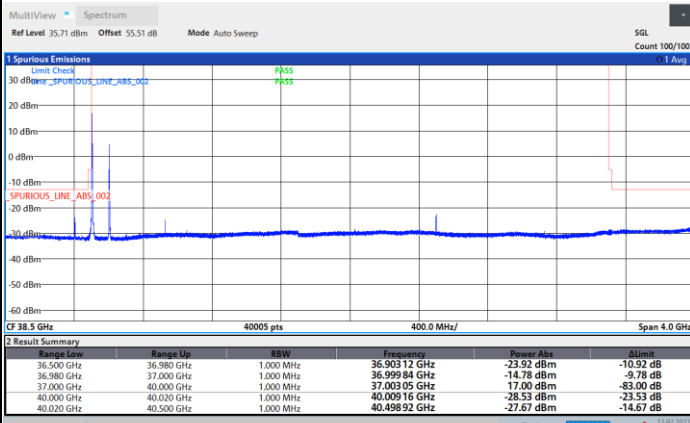




DFT-s-OFDM Module 0


NR Band n260 / 50MHz / BPSK

Lowest Band Edge / Full RB

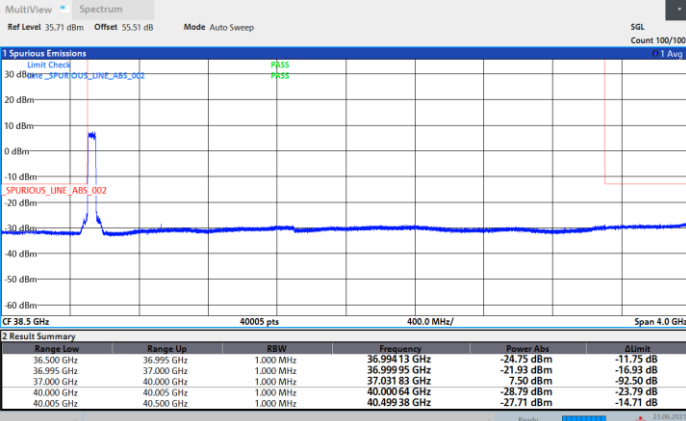

21:41:44 23.06.2021


Highest Band Edge / Full RB

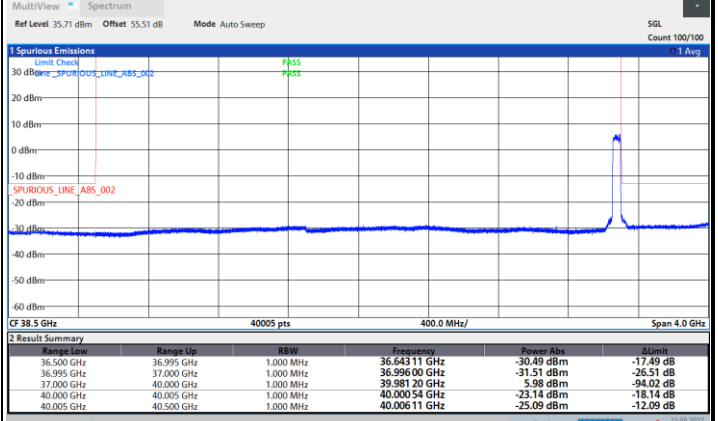

22:24:54 23.06.2021


NR Band n260 / 50MHz / QPSK

Lowest Band Edge / Full RB

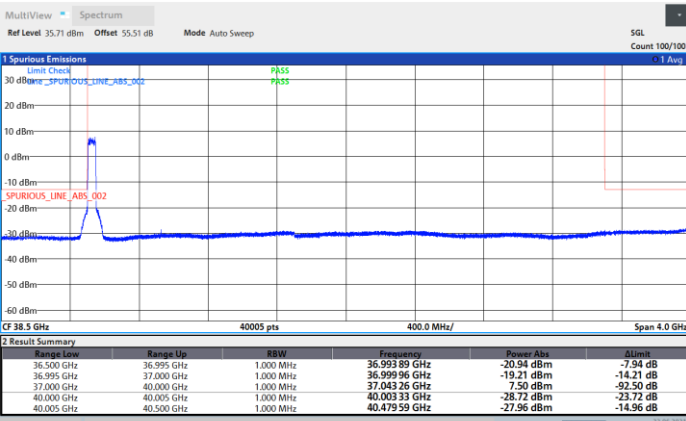

21:38:39 23.06.2021

Highest Band Edge / Full RB


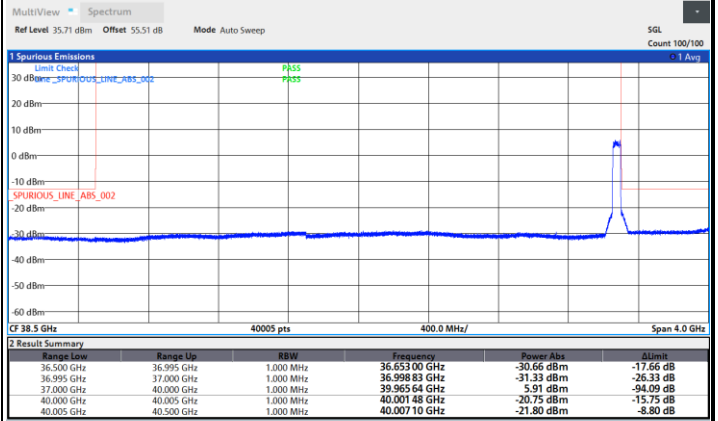


22:26:31 23.06.2021





DFT-s-OFDM Module 0

NR Band n260 / 50MHz / 16QAM

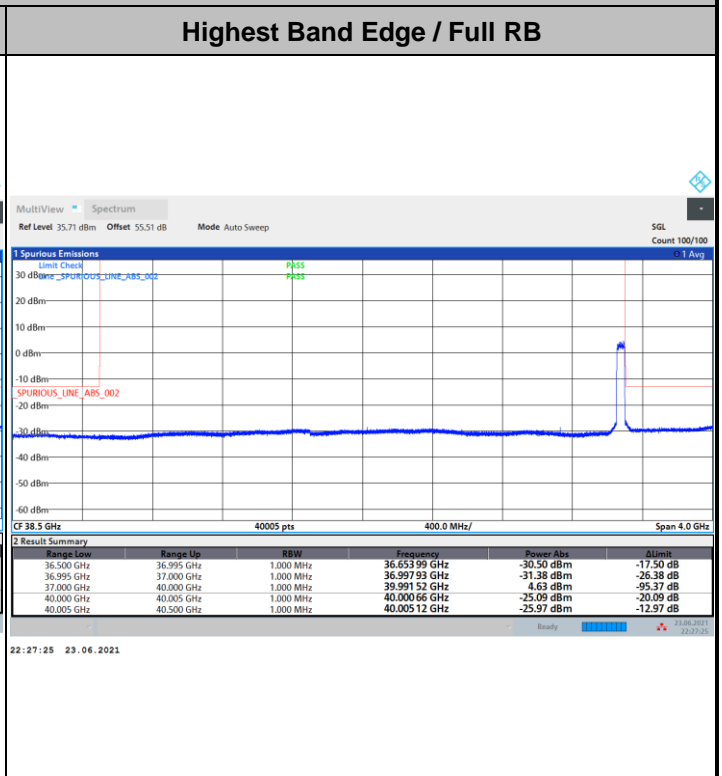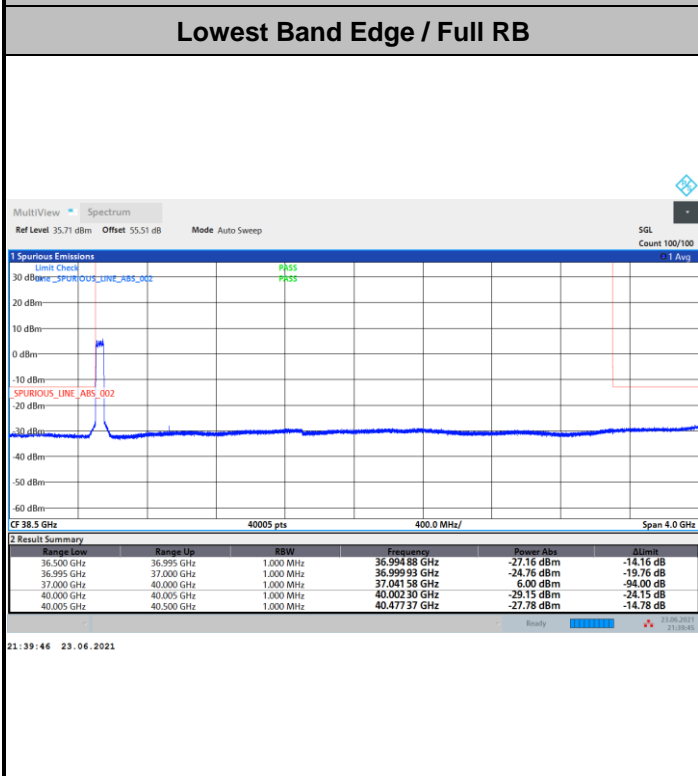

NR Band n260 / 50MHz / 64QAM

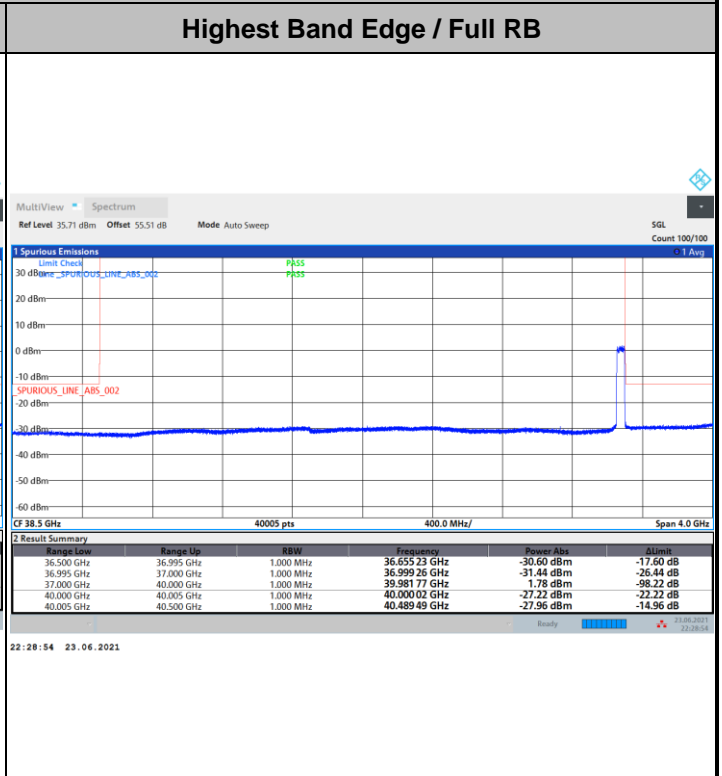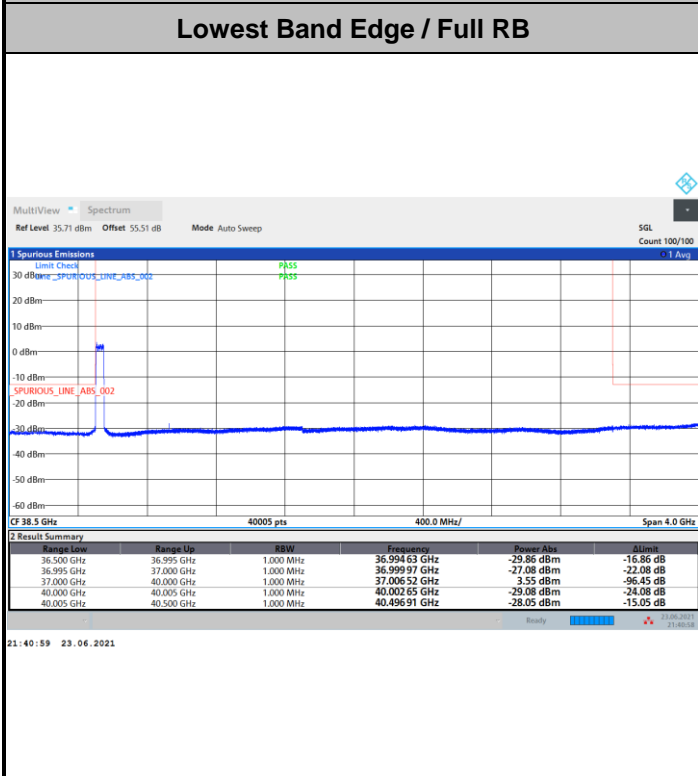



DFT-s-OFDM Module 0

