



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2139-1,XT2139-2
FCC ID : IHDT56ZU1
STANDARD : 47 CFR Part 2, 22, 27
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S) : Jun. 06, 2021 ~ Jun. 29, 2021

We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International (Shenzhen) Inc.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Jason Jia

Reviewed by: Jason Jia / Supervisor

Alex Wang

Approved by: Alex Wang / Manager



Sporton International (Kunshan) Inc.

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY...3
SUMMARY OF TEST RESULT...4
1 GENERAL DESCRIPTION...5
1.1 Applicant...5
1.2 Manufacturer...5
1.3 Product Feature of Equipment Under Test...5
1.4 Product Specification of Equipment Under Test...5
1.5 Modification of EUT...6
1.6 Maximum ERP/EIRP Power and Emission Designator...6
1.7 Specification of Accessory...8
1.8 Testing Location...9
1.9 Test Software...9
1.10 Applicable Standards...10
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST...11
2.1 Test Mode...11
2.2 Connection Diagram of Test System...13
2.3 Support Unit used in test configuration and system...13
2.4 Measurement Results Explanation Example...13
2.5 Frequency List of Low/Middle/High Channels...14
3 CONDUCTED TEST ITEMS...18
3.1 Measuring Instruments...18
3.2 Test Setup...18
3.3 Test Result of Conducted Test...18
3.4 Conducted Output Power and ERP/EIRP...19
3.5 Peak-to-Average Ratio...20
3.6 Occupied Bandwidth...21
3.7 Conducted Band Edge...22
3.8 Conducted Spurious Emission...24
3.9 Frequency Stability...25
4 RADIATED TEST ITEMS...26
4.1 Measuring Instruments...26
4.2 Test Setup...26
4.3 Test Result of Radiated Test...27
4.4 Radiated Spurious Emission...28
5 LIST OF MEASURING EQUIPMENT...29
6 UNCERTAINTY OF EVALUATION...30
APPENDIX A. TEST RESULTS OF CONDUCTED TEST
APPENDIX B. TEST RESULTS OF RADIATED TEST
APPENDIX C. TEST SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§22.913(a)(5)	Effective Radiated Power (5G NR n5)	ERP < 7 Watt		
	§27.50(h)(2)	Equivalent Isotropic Radiated Power (5G NR n7)	EIRP < 2Watt		
	§27.50(d)(4)	Equivalent Isotropic Radiated Power (5G NR n66)	EIRP < 1Watt		
	§27.50(j)(3)	Equivalent Isotropic Radiated Power (5G NR n77, n78)	EIRP < 1Watt		
3.5	§24.232(d) §27.50(j)(4)	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a) §27.53(h) §27.53(l)(2)	Conducted Band Edge Measurement (5G NR n5) (5G NRn66) (5G NR n77, n78)	< 43+10log ₁₀ (P[Watts])	PASS	-
	§27.53(m)(4)	Conducted Band Edge Measurement (5G NR n7)	§27.53(m)(4)		
3.8	§2.1051 §22.917(a) §27.53(h) §27.53(l)(2)	Conducted Spurious Emission (5G NR n5) (5G NRn66) (5G NR n77, n78)	< 43+10log ₁₀ (P[Watts])	PASS	-
	§2.1051 §27.53(m)(4)	Conducted Spurious Emission (5G NR n7)	< 55+10log ₁₀ (P[Watts])		
3.9	§2.1055 §22.355	Frequency Stability Temperature & Voltage	< 2.5 ppm for Part 22	PASS	-
	§24.235 §27.54		Within Authorized Band		
4.4	§2.1053 §22.917(a) §27.53(h) §27.53(l)(2)	Radiated Spurious Emission (5G NR n5) (5G NRn66) (5G NR n77, n78)	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 34.66 dB at 10100.000 MHz
	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (5G NR n7)	< 55+10log ₁₀ (P[Watts])		

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2139-1,XT2139-2
FCC ID	IHDT56ZU1
EUT supports Radios application	GSM/WCDMA/NFC/LTE/5G NR WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE FM Receiver and GNSS
IMEI Code	Conducted: 351214780015915/351214780015901 Radiation: 368253050047485/368253050047493
HW Version	DVT2
SW Version	RRK31.Q3-3
EUT Stage	Identical Prototype

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	5G NR n5 : 824 MHz ~ 849 MHz 5G NR n7 : 2500 MHz ~ 2570 MHz 5G NR n66 : 1710 MHz ~ 1780 MHz 5G NR n77: 3700 MHz ~ 3980 MHz 5G NR n78: 3700 MHz ~ 3800 MHz
Rx Frequency	5G NR n5 : 869 MHz ~ 894 MHz 5G NR n7 : 2620 MHz ~ 2690 MHz 5G NR n66 : 2110 MHz~ 2200 MHz 5G NR n77: 3700 MHz ~ 3980 MHz 5G NR n78: 3700 MHz ~ 3800 MHz
SCS	n5, n7, n66, n77, n78: 15kHz n77, n78: 30kHz
Bandwidth	n5, n7: 5MHz / 10MHz / 15MHz / 20MHz



	n66: 5MHz / 10MHz / 15MHz / 20MHz / 40MHz n77: 10MHz / 15MHz / 20MHz / 40MHz / 50MHz / 60MHz / 80MHz / 90MHz / 100MHz n78: 10MHz / 15MHz / 20MHz / 40MHz / 50MHz / 60MHz / 70MHz / 80MHz / 90MHz / 100MHz
Antenna Gain	5G NR n5: -3.5 dBi 5G NR n7: -1.0 dBi 5G NR n66: -1.1 dBi 5G NR n77: -2.2 dBi 5G NR n78: -2.6 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum ERP/EIRP Power and Emission Designator

5G NR n5 (EN DC_7A-n5A)		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)
5	826.5 ~ 846.5	0.0546	4M47G7D	0.0436	4M46W7D
10	829.0 ~ 844.0	0.0513	9M28G7D	0.0419	9M28W7D
15	831.5 ~ 841.5	0.0522	14M1G7D	0.0431	14M1W7D
20	834.0 ~ 839.0	0.0525	18M9G7D	0.0430	18M9W7D
5G NR n7 (EN DC_2A-n7A)		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5	2502.5 ~ 2567.5	0.1710	4M47G7D	0.1340	4M47W7D
10	2505.0 ~ 2565.0	0.1581	9M29G7D	0.1262	9M29W7D
15	2507.5 ~ 2562.5	0.1644	14M1G7D	0.1327	14M1W7D
20	2510.0 ~ 2560.0	0.1648	18M9G7D	0.1337	18M9W7D
5G NR n66 (EN DC_5A-n66A)		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5	1712.5 ~ 1777.5	0.1626	4M47G7D	0.1297	4M47W7D
10	1715.0 ~ 1775.0	0.1585	9M28G7D	0.1274	9M29W7D



15	1717.5 ~ 1772.5	0.1641	14M1G7D	0.1315	14M1W7D
20	1720.0 ~ 1770.0	0.1660	18M9G7D	0.1334	18M9W7D
40	1730.0 ~ 1760.0	0.1531	38M5G7D	0.1197	38M6W7D

5G NR n77-SCS 15k (EN DC_41A-n77A)		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	3705.00 ~ 3975.00	0.2742	9M36G7D	0.2307	9M38W7D
15	3707.51 ~ 3972.49	0.2851	14M2G7D	0.2427	14M2W7D
20	3709.99 ~ 3970.01	0.2838	19M1G7D	0.2415	19M1W7D
40	3720.00 ~ 3960.00	0.2767	39M0G7D	0.2317	39M0W7D
50	3724.99 ~ 3955.01	0.2851	48M7G7D	0.2360	48M6W7D

5G NR n77-SCS 30k (EN DC_41A-n77A)		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	3705.00 ~ 3975.00	0.2825	8M59G7D	0.2280	8M58W7D
15	3707.52 ~ 3972.48	0.2767	13M5G7D	0.2312	13M6W7D
20	3710.01 ~ 3969.99	0.2805	18M2G7D	0.2213	18M2W7D
40	3840.00 ~ 3964.98	0.2729	37M8G7D	0.2153	37M8W7D
50	3725.01 ~ 3954.99	0.2655	47M4G7D	0.2109	47M5W7D
60	3730.02 ~ 3949.98	0.2704	57M9G7D	0.2148	57M9W7D
80	3740.01 ~ 3939.99	0.2793	77M6G7D	0.2203	77M6W7D
90	3745.02 ~ 3934.98	0.2735	87M4G7D	0.2163	87M4W7D
100	3750.00 ~ 3930.00	0.2831	97M2G7D	0.2178	97M4W7D



5G NR n78-SCS 15k (EN DC_4A-n78A)		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
50	3724.99 ~ 3755.01	0.2541	48M7G7D	0.1954	48M6W7D

5G NR n78-SCS 30k (EN DC_4A-n78A)		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
100	3750	0.2518	97M2G7D	0.1837	97M4W7D

Note:

5G NR n77 overlaps the entire frequency range of 5G NR n78. Therefore, the test results provided in this report covers 5G NR n78.

1.7 Specification of Accessory

Specification of Accessory				
AC Adapter 1(US)	Brand Name	Motorola(Salom)	Model Name	MC-301
AC Adapter 1(EU)	Brand Name	Motorola(Salom)	Model Name	MC-302
AC Adapter 1(UK)	Brand Name	Motorola(Salom)	Model Name	MC-303
AC Adapter 1(AU)	Brand Name	Motorola(Salom)	Model Name	MC-305
AC Adapter 1(AR)	Brand Name	Motorola(Salom)	Model Name	MC-306
AC Adapter 1(BR)	Brand Name	Motorola(Salom)	Model Name	MC-307
AC Adapter 2(US)	Brand Name	Motorola(Acbel)	Model Name	MC-301
AC Adapter 2(EU)	Brand Name	Motorola(Acbel)	Model Name	MC-302
AC Adapter 2(UK)	Brand Name	Motorola(Acbel)	Model Name	MC-303
AC Adapter 2(IN)	Brand Name	Motorola(Acbel)	Model Name	MC-304
AC Adapter 2(AU)	Brand Name	Motorola(Acbel)	Model Name	MC-305
AC Adapter 2(AR)	Brand Name	Motorola(Acbel)	Model Name	MC-306
AC Adapter 2(CHILE)	Brand Name	Motorola(Acbel)	Model Name	MC-309
AC Adapter 3(BR)	Brand Name	Motorola(Flex)	Model Name	MC-307
Battery	Brand Name	Motorola(ATL)	Model Name	NT50
Earphone 1	Brand Name	Motorola(Lyand)	Model Name	MH191(SH38C81577)
Earphone 2	Brand Name	Motorola(LCHSE)	Model Name	MH191(SH38C81576)
Earphone 3	Brand Name	Motorola(NEW LEADER)	Model Name	MH202(S928D09678)
USB Cable 1	Brand Name	Motorola(Saibao)	Model Name	SC18D13215
USB Cable 2	Brand Name	Motorola(Cabletech)	Model Name	SC18D13216
USB Cable 3	Brand Name	Motorola(Luxshare)	Model Name	SC18D13217



1.8 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-KS TH01-KS	CN1257	314309

Sporton International (Shenzhen) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International (Shenzhen) Inc.		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ	CN1256	421272

1.9 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH04-KS	AUDIX	E3	6.2009-8-24a



1.10 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22, 27
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

All test items were verified and recorded according to the standards and without any deviation during the test.




2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.


Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			

Test Items	5G NR	Bandwidth (MHz)						Modulation					RB #		Test Channel			
		5	10	15	20	40-90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM	1	Full	L	M	H	
Max. Output Power	n5	v	v	v	v	-	-	v	v	v	v	v	v	v	v	v	v	v
	n7	v	v	v	v	-	-	v	v	v	v	v	v	v	v	v	v	v
	n66	v	v	v	v	v	-	v	v	v	v	v	v	v	v	v	v	v
	n77	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	n78	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	n5				v	-	-	v	v				v	v	v	v	v	
	n7				v	-	-	v	v				v	v	v	v	v	
	n66				v		-	v	v				v	v	v	v	v	
	n77				v			v	v				v		v	v	v	
	n78				v			v	v				v	v	v	v	v	
26dB and 99% Bandwidth	n5	v	v	v	v	-	-	v	v	v	v	v		v		v		
	n7	v	v	v	v	-	-	v	v	v	v	v		v		v		
	n66	v	v	v	v	v	-	v	v	v	v	v		v		v		
	n77	v	v	v	v	v	v	v	v	v	v	v		v		v		
	n78	v	v	v	v	v	v	v	v	v	v	v		v		v		



Test Items	Band	Bandwidth (MHz)						Modulation					RB #		Test Channel		
		5	10	15	20	40-90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM	1	Full	L	M	H
Conducted Band Edge	n5	v	v		v	-	-	v	v				v	v	v		v
	n7	v	v		v	-	-	v	v				v	v	v		v
	n66	v			v	v	-	v	v				v	v	v		v
	n77		v			v	v	v	v				v	v	v		v
	n78		v			v	v	v	v				v	v	v		v
Conducted Spurious Emission	n5	v	v		v	-	-	v	v				v		v	v	v
	n7	v	v		v	-	-	v	v				v		v	v	v
	n66	v			v	v	-	v	v				v		v	v	v
	n77		v			v	v	v	v				v		v	v	v
	n78		v			v	v	v	v				v		v	v	v
Frequency Stability	n5				v	-	-		v					v		v	
	n7				v	-	-		v					v		v	
	n66				v		-		v					v		v	
	n77				v				v					v		v	
	n78				v				v					v		v	
E.R.P / E.I.R.P	n5	v	v	v	v	-	-	v	v	v	v	v	v	v	v	v	v
	n7	v	v	v	v	-	-	v	v	v	v	v	v	v	v	v	v
	n66	v	v	v	v	v	-	v	v	v	v	v	v	v	v	v	v
	n77	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	n78	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Radiated Spurious Emission	n5	Worst Case														v	
	n7	Worst Case														v	
	n66	Worst Case														v	
	n77	Worst Case														v	
	n78	Worst Case														v	
Note	<ol style="list-style-type: none"> The mark "v " means that this configuration is chosen for testing The mark "-" means that this bandwidth is not supported. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 5G NR supports NSA mode only (refer to the Operation Description) except n78, based on engineering evaluation, only show the worst EN-DC mode in the report. 5G NR n78 supports SA and NSA mode. 5G NR n41/n77/n78 supports HPUE mode. For modulation of CP-OFDM and DFT-s-OFDM , the maximum power of CP-OFDM is lower than DFT-s-OFDM modulation, therefore, we chose higher power (DFT-s-OFDM modulation) to perform all tests and show in the report. All modulations (BPSK/QPSK/16QAM/64QAM/256QAM) have been evaluation, and only the worst test results are shown in the report. 																

2.2 Connection Diagram of Test System

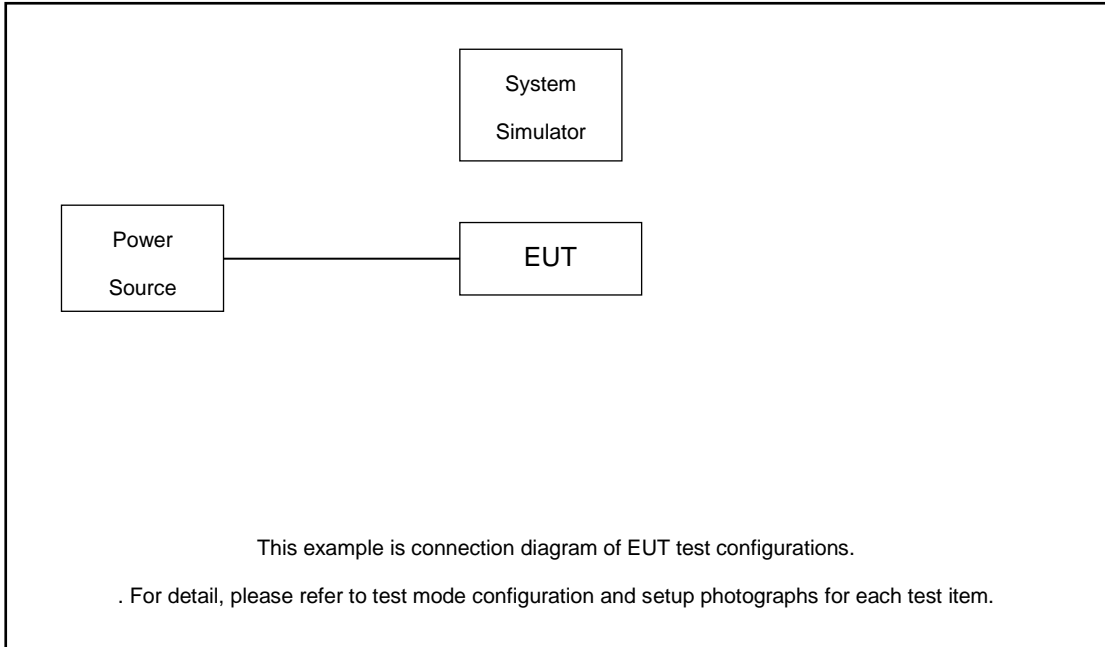

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5.2 dB and 10dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 5.2 + 10 = 15.2 \text{ (dB)} \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

5G NR n5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	166800	167300	167800
	Frequency	834	836.5	839
15	Channel	166300	167300	168300
	Frequency	831.5	836.5	841.5
10	Channel	165800	167300	168800
	Frequency	829	836.5	844
5	Channel	165300	167300	169300
	Frequency	826.5	836.5	846.5

5G NR n7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	502000	507000	512000
	Frequency	2510	2535	2560
15	Channel	501500	507000	512500
	Frequency	2507.5	2535	2562.5
10	Channel	501000	507000	513000
	Frequency	2505	2535	2565
5	Channel	500500	507000	513500
	Frequency	2502.5	2535	2567.5

5G NR n66 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	426000	429000	432000
	Frequency	1730	1745	1760
20	Channel	424000	429000	434000
	Frequency	1720	1745	1770
15	Channel	423500	429000	434500
	Frequency	1717.5	1745	1772.5
10	Channel	423000	429000	435000
	Frequency	1715	1745	1775
5	Channel	422500	429000	435500
	Frequency	1712.5	1745	1777.5



5G NR n77 Channel and Frequency List(SCS 15k)				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
50	Channel	648333	656000	663667
	Frequency	3724.99	3840	3955.01
40	Channel	648000	656000	664000
	Frequency	3720.00	3840	3960.00
20	Channel	647333	656000	664667
	Frequency	3709.99	3840	3970.01
15	Channel	647167	656000	664833
	Frequency	3707.51	3840	3972.49
10	Channel	647000	656000	665000
	Frequency	3705.00	3840	3975.00

5G NR n77 Channel and Frequency List(SCS 30k)				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	650000	656000	662000
	Frequency	3750.00	3840	3930.00
90	Channel	649668	656000	662332
	Frequency	3745.02	3840	3934.98
80	Channel	649334	656000	662666
	Frequency	3740.01	3840	3939.99
60	Channel	648668	656000	663332
	Frequency	3730.02	3840	3949.98
50	Channel	648334	656000	663666
	Frequency	3725.01	3840	3954.99
40	Channel	656000	664000	664332
	Frequency	3840.00	3960	3964.98
20	Channel	647334	656000	664666
	Frequency	3710.01	3840	3969.99
15	Channel	647168	656000	664832
	Frequency	3707.52	3840	3972.48
10	Channel	647000	656000	665000
	Frequency	3705.00	3840	3975.00



5G NR n78 Channel and Frequency List(SCS 15k)				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
50	Channel	648333	650000	651667
	Frequency	3724.99	3750	3755.01
40	Channel	648000	650000	652000
	Frequency	3720.00	3750	3780.00
20	Channel	647333	650000	652667
	Frequency	3709.99	3750	3790.01
15	Channel	647167	650000	652833
	Frequency	3707.51	3750	3792.49
10	Channel	647000	650000	653000
	Frequency	3705.00	3750	3795.00



5G NR n78 Channel and Frequency List(SCS 30k)				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	650000		
	Frequency	3750		
90	Channel	649668	650000	650332
	Frequency	3745.02	3750	3754.98
80	Channel	649334	650000	650666
	Frequency	3740.01	3750	3759.99
70	Channel	649000	650000	651000
	Frequency	3735.00	3750	3765.00
60	Channel	648668	650000	651332
	Frequency	3730.02	3750	3769.98
50	Channel	648334	650000	651666
	Frequency	3725.01	3750	3774.99
40	Channel	648000	650000	652000
	Frequency	3720.00	3750	3780.00
20	Channel	647334	650000	652666
	Frequency	3710.01	3750	3789.99
15	Channel	647168	650000	652832
	Frequency	3707.52	3750	3792.48
10	Channel	647000	650000	653000
	Frequency	3705.00	3750	3795.00

3 Conducted Test Items

3.1 Measuring Instruments

See list of measuring instruments of this test report.

3.2 Test Setup

3.2.1 Conducted Output Power



3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission



3.2.3 Frequency Stability



3.3 Test Result of Conducted Test

Please refer to Appendix A.



3.4 Conducted Output Power and ERP/EIRP

3.4.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for 5G NR n5.

The EIRP of mobile transmitters must not exceed 2 Watts for 5G NR n7.

The EIRP of mobile transmitters must not exceed 1 Watts for 5G NR n66, n77, n78.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.



3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.6 (PAPR).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set EUT in maximum power output.
4. Set the RBW = 1MHz, VBW = 3MHz, Detector = Peak, Trace mode = max hold, Set span $\geq 2 \times$ OBW in spectrum analyzer.
5. Set the RBW = 1MHz, VBW = 3MHz, Detector = power averaging, Trace mode = max hold, Set span $\geq 2 \times$ OBW in spectrum analyzer.
6. Add $[10 \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission.
7. $PAPR \text{ (dB)} = P_{Pk} \text{ (dBm)} - P_{Avg} \text{ (dBm)}$
where
PAPR peak-to-average power ratio, in dB
 P_{Pk} measured peak power level, in dBm
 P_{Avg} measured average power level, in dBm
8. Record the deviation as Peak to Average Ratio.



3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53 (h)

For operations in the 1710 – 1755 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53(m)(4)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

27.53(l)(2)

For mobile operations in the 3700-3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz. Compliance with this paragraph is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be either one percent of the emission bandwidth of the fundamental emission of the transmitter or 350 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.



3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW \geq 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB) = -13dBm.

9. For 5G NR n7, the other 40 dB, and 55 dB have additionally applied same calculation above.



3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For 5G NR n7:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13$ dBm.
11. For 5G NR n7
The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [55 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[55 + 10\log(P)]$ (dB)
 $= -25$ dBm.



3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

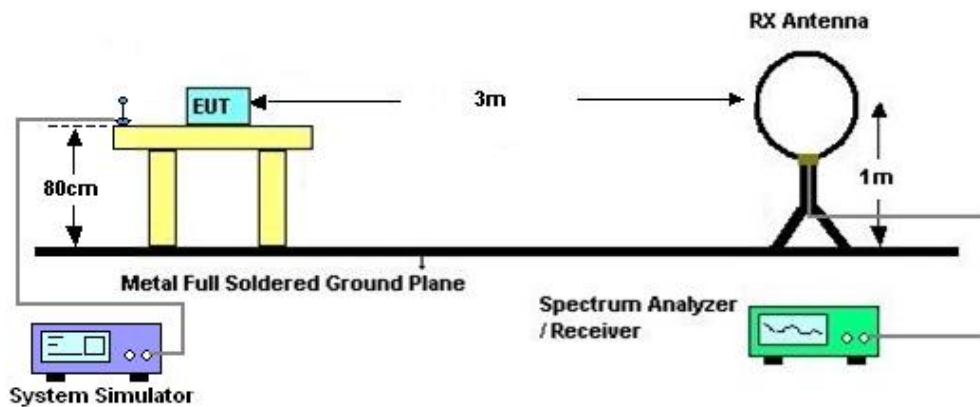

4.2.2 For radiated test from 30MHz to 1GHz

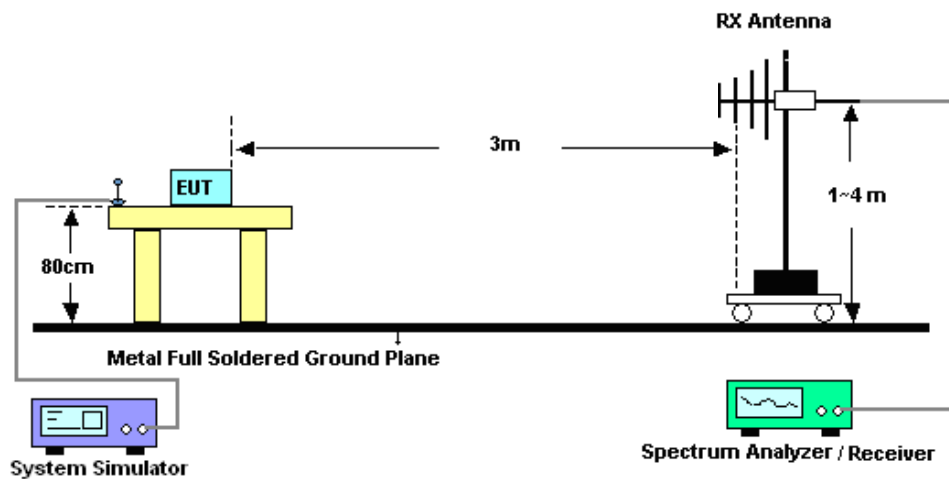

4.2.3 For radiated test above 1GHz

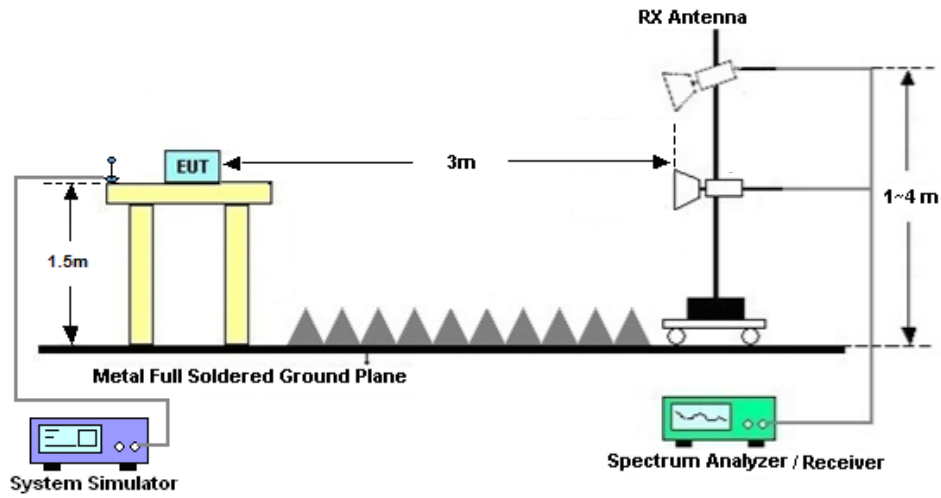

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.



4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For 5G NR n7

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP (dBm) = S.G. Power - Tx Cable Loss + Tx Antenna Gain$
11. $ERP (dBm) = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] (dB)$
 $= [30 + 10\log(P)] (dBm) - [43 + 10\log(P)] (dB)$
 $= -13dBm.$

13. For 5G NR n7:

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 08, 2021	Jun. 06, 2021~ Jun. 29, 2021	Apr. 07, 2022	Conducted (TH01-SZ)
Power divider	STI	STI08-0055	-	0.5~40GHz	Aug. 27, 2020	Jun. 06, 2021~ Jun. 29, 2021	Aug. 26, 2021	Conducted (TH01-KS)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Jul. 22, 2020	Jun. 06, 2021~ Jun. 29, 2021	Jul. 21, 2021	Conducted (TH01-SZ)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz-44G,MAX 30dB	Apr. 13, 2021	Jun. 21, 2021	Apr. 12, 2022	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 1, 2020	Jun. 21, 2021	Oct. 31, 2021	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz-1GHz	Jun. 07, 2021	Jun. 21, 2021	Jun. 06, 2022	Radiation (03CH04-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	1356	1GHz~18GHz	Apr. 18, 2021	Jun. 21, 2021	Apr. 17, 2022	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Jan. 06, 2021	Jun. 21, 2021	Jan. 05, 2022	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	Jan. 06, 2021	Jun. 21, 2021	Jan. 05, 2022	Radiation (03CH04-KS)
Amplifier	MITEQ	EM18G40G GA	060728	18~40GHz	Jan. 07, 2021	Jun. 21, 2021	Jan. 06, 2022	Radiation (03CH04-KS)
high gain Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P	2025788	1Ghz-18Ghz	Jan. 06, 2021	Jun. 21, 2021	Jan. 05, 2022	Radiation (03CH04-KS)
Amplifier	Keysight	83017A	MY57280106	500MHz~26.5GHz	Oct. 14, 2020	Jun. 21, 2021	Oct. 13, 2021	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jun. 21, 2021	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jun. 21, 2021	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jun. 21, 2021	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required



6 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.3dB
---	-------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8dB
---	-------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8dB
---	-------

----- THE END -----



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power and EIRP)

FR1 N5

LTE Band: 7, LTE BW: 20M, LTE ARFCN: Mid

Transmitter Conducted Output Power And ERP/EIRP, (G_T - L_C)=-3.5dB

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	ERP(dBm)	ERP(W)
5	15	5	174300	826.5	DFT-s-OFDM PI/2 BPSK	12@6	22.5	16.86	0.0485
5	15	5	174300	826.5	DFT-s-OFDM PI/2 BPSK	1@1	22.35	16.71	0.0469
5	15	5	174300	826.5	DFT-s-OFDM PI/2 BPSK	1@23	22.66	17.02	0.0504
5	15	5	174300	826.5	DFT-s-OFDM QPSK	12@6	22.53	16.89	0.0489
5	15	5	174300	826.5	DFT-s-OFDM QPSK	1@1	22.77	17.13	0.0516
5	15	5	174300	826.5	DFT-s-OFDM QPSK	1@23	22.82	17.18	0.0522
5	15	5	174300	826.5	DFT-s-OFDM 16 QAM	12@6	21.79	16.15	0.0412
5	15	5	174300	826.5	DFT-s-OFDM 16 QAM	1@1	21.76	16.12	0.0409
5	15	5	174300	826.5	DFT-s-OFDM 16 QAM	1@23	21.81	16.17	0.0414
5	15	5	174300	826.5	DFT-s-OFDM 64 QAM	12@6	20.2	14.56	0.0286
5	15	5	174300	826.5	DFT-s-OFDM 64 QAM	1@1	20.08	14.44	0.0278
5	15	5	174300	826.5	DFT-s-OFDM 64 QAM	1@23	20.03	14.39	0.0275
5	15	5	174300	826.5	DFT-s-OFDM 256 QAM	12@6	18.14	12.5	0.0178
5	15	5	174300	826.5	DFT-s-OFDM 256 QAM	1@1	17.63	11.99	0.0158
5	15	5	174300	826.5	DFT-s-OFDM 256 QAM	1@23	17.76	12.12	0.0163
5	15	5	174300	826.5	CP-OFDM QPSK	13@6	21.3	15.66	0.0368
5	15	5	174300	826.5	CP-OFDM QPSK	1@1	21.08	15.44	0.035
5	15	5	174300	826.5	CP-OFDM QPSK	1@23	21.16	15.52	0.0356
5	15	5	176300	836.5	DFT-s-OFDM PI/2 BPSK	12@6	22.56	16.92	0.0492

5	15	5	176300	836.5	DFT-s-OFDM PI/2 BPSK	1@1	22.53	16.89	0.0489
5	15	5	176300	836.5	DFT-s-OFDM PI/2 BPSK	1@23	22.56	16.92	0.0492
5	15	5	176300	836.5	DFT-s-OFDM QPSK	12@6	22.68	17.04	0.0506
5	15	5	176300	836.5	DFT-s-OFDM QPSK	1@1	22.87	17.23	0.0528
5	15	5	176300	836.5	DFT-s-OFDM QPSK	1@23	22.87	17.23	0.0528
5	15	5	176300	836.5	DFT-s-OFDM 16 QAM	12@6	21.8	16.16	0.0413
5	15	5	176300	836.5	DFT-s-OFDM 16 QAM	1@1	21.92	16.28	0.0425
5	15	5	176300	836.5	DFT-s-OFDM 16 QAM	1@23	21.92	16.28	0.0425
5	15	5	176300	836.5	DFT-s-OFDM 64 QAM	12@6	20.27	14.63	0.029
5	15	5	176300	836.5	DFT-s-OFDM 64 QAM	1@1	20.13	14.49	0.0281
5	15	5	176300	836.5	DFT-s-OFDM 64 QAM	1@23	20.23	14.59	0.0288
5	15	5	176300	836.5	DFT-s-OFDM 256 QAM	12@6	18.29	12.65	0.0184
5	15	5	176300	836.5	DFT-s-OFDM 256 QAM	1@1	17.77	12.13	0.0163
5	15	5	176300	836.5	DFT-s-OFDM 256 QAM	1@23	17.84	12.2	0.0166
5	15	5	176300	836.5	CP-OFDM QPSK	13@6	21.36	15.72	0.0373
5	15	5	176300	836.5	CP-OFDM QPSK	1@1	21.19	15.55	0.0359
5	15	5	176300	836.5	CP-OFDM QPSK	1@23	21.26	15.62	0.0365
5	15	5	178300	846.5	DFT-s-OFDM PI/2 BPSK	12@6	22.68	17.04	0.0506
5	15	5	178300	846.5	DFT-s-OFDM PI/2 BPSK	1@1	22.65	17.01	0.0502
5	15	5	178300	846.5	DFT-s-OFDM PI/2 BPSK	1@23	22.68	17.04	0.0506
5	15	5	178300	846.5	DFT-s-OFDM QPSK	12@6	22.92	17.28	0.0535
5	15	5	178300	846.5	DFT-s-OFDM QPSK	1@1	22.98	17.34	0.0542
5	15	5	178300	846.5	DFT-s-OFDM QPSK	1@23	23.01	17.37	0.0546
5	15	5	178300	846.5	DFT-s-OFDM 16 QAM	12@6	21.91	16.27	0.0424

5	15	5	178300	846.5	DFT-s-OFDM 16 QAM	1@1	22.03	16.39	0.0436
5	15	5	178300	846.5	DFT-s-OFDM 16 QAM	1@23	22.02	16.38	0.0435
5	15	5	178300	846.5	DFT-s-OFDM 64 QAM	12@6	20.38	14.74	0.0298
5	15	5	178300	846.5	DFT-s-OFDM 64 QAM	1@1	20.2	14.56	0.0286
5	15	5	178300	846.5	DFT-s-OFDM 64 QAM	1@23	20.43	14.79	0.0301
5	15	5	178300	846.5	DFT-s-OFDM 256 QAM	12@6	18.31	12.67	0.0185
5	15	5	178300	846.5	DFT-s-OFDM 256 QAM	1@1	17.84	12.2	0.0166
5	15	5	178300	846.5	DFT-s-OFDM 256 QAM	1@23	17.89	12.25	0.0168
5	15	5	178300	846.5	CP-OFDM QPSK	13@6	21.4	15.76	0.0377
5	15	5	178300	846.5	CP-OFDM QPSK	1@1	21.21	15.57	0.0361
5	15	5	178300	846.5	CP-OFDM QPSK	1@23	21.31	15.67	0.0369
5	15	10	174800	829.0	DFT-s-OFDM PI/2 BPSK	25@12	22.35	16.71	0.0469
5	15	10	174800	829.0	DFT-s-OFDM PI/2 BPSK	1@1	22.25	16.61	0.0458
5	15	10	174800	829.0	DFT-s-OFDM PI/2 BPSK	1@50	22.4	16.76	0.0474
5	15	10	174800	829.0	DFT-s-OFDM QPSK	25@12	22.43	16.79	0.0478
5	15	10	174800	829.0	DFT-s-OFDM QPSK	1@1	22.36	16.72	0.047
5	15	10	174800	829.0	DFT-s-OFDM QPSK	1@50	22.58	16.94	0.0494
5	15	10	174800	829.0	DFT-s-OFDM 16 QAM	25@12	21.56	15.92	0.0391
5	15	10	174800	829.0	DFT-s-OFDM 16 QAM	1@1	21.56	15.92	0.0391
5	15	10	174800	829.0	DFT-s-OFDM 16 QAM	1@50	21.72	16.08	0.0406
5	15	10	174800	829.0	DFT-s-OFDM 64 QAM	25@12	20.0	14.36	0.0273
5	15	10	174800	829.0	DFT-s-OFDM 64 QAM	1@1	19.87	14.23	0.0265
5	15	10	174800	829.0	DFT-s-OFDM 64 QAM	1@50	20.0	14.36	0.0273
5	15	10	174800	829.0	DFT-s-OFDM 256 QAM	25@12	18.15	12.51	0.0178

5	15	10	174800	829.0	DFT-s-OFDM 256 QAM	1@1	17.49	11.85	0.0153
5	15	10	174800	829.0	DFT-s-OFDM 256 QAM	1@50	18.47	12.83	0.0192
5	15	10	174800	829.0	CP-OFDM QPSK	26@13	21.04	15.4	0.0347
5	15	10	174800	829.0	CP-OFDM QPSK	1@1	20.84	15.2	0.0331
5	15	10	174800	829.0	CP-OFDM QPSK	1@50	21.02	15.38	0.0345
5	15	10	176300	836.5	DFT-s-OFDM PI/2 BPSK	25@12	22.49	16.85	0.0484
5	15	10	176300	836.5	DFT-s-OFDM PI/2 BPSK	1@1	22.37	16.73	0.0471
5	15	10	176300	836.5	DFT-s-OFDM PI/2 BPSK	1@50	22.53	16.89	0.0489
5	15	10	176300	836.5	DFT-s-OFDM QPSK	25@12	22.5	16.86	0.0485
5	15	10	176300	836.5	DFT-s-OFDM QPSK	1@1	22.52	16.88	0.0488
5	15	10	176300	836.5	DFT-s-OFDM QPSK	1@50	22.66	17.02	0.0504
5	15	10	176300	836.5	DFT-s-OFDM 16 QAM	25@12	21.61	15.97	0.0395
5	15	10	176300	836.5	DFT-s-OFDM 16 QAM	1@1	21.69	16.05	0.0403
5	15	10	176300	836.5	DFT-s-OFDM 16 QAM	1@50	21.84	16.2	0.0417
5	15	10	176300	836.5	DFT-s-OFDM 64 QAM	25@12	20.08	14.44	0.0278
5	15	10	176300	836.5	DFT-s-OFDM 64 QAM	1@1	19.86	14.22	0.0264
5	15	10	176300	836.5	DFT-s-OFDM 64 QAM	1@50	20.09	14.45	0.0279
5	15	10	176300	836.5	DFT-s-OFDM 256 QAM	25@12	18.18	12.54	0.0179
5	15	10	176300	836.5	DFT-s-OFDM 256 QAM	1@1	17.56	11.92	0.0156
5	15	10	176300	836.5	DFT-s-OFDM 256 QAM	1@50	18.55	12.91	0.0195
5	15	10	176300	836.5	CP-OFDM QPSK	26@13	21.13	15.49	0.0354
5	15	10	176300	836.5	CP-OFDM QPSK	1@1	20.91	15.27	0.0337
5	15	10	176300	836.5	CP-OFDM QPSK	1@50	21.16	15.52	0.0356
5	15	10	177800	844.0	DFT-s-OFDM PI/2 BPSK	25@12	22.68	17.04	0.0506

5	15	10	177800	844.0	DFT-s-OFDM PI/2 BPSK	1@1	22.47	16.83	0.0482
5	15	10	177800	844.0	DFT-s-OFDM PI/2 BPSK	1@50	22.49	16.85	0.0484
5	15	10	177800	844.0	DFT-s-OFDM QPSK	25@12	22.61	16.97	0.0498
5	15	10	177800	844.0	DFT-s-OFDM QPSK	1@1	22.6	16.96	0.0497
5	15	10	177800	844.0	DFT-s-OFDM QPSK	1@50	22.74	17.1	0.0513
5	15	10	177800	844.0	DFT-s-OFDM 16 QAM	25@12	21.77	16.13	0.041
5	15	10	177800	844.0	DFT-s-OFDM 16 QAM	1@1	21.75	16.11	0.0408
5	15	10	177800	844.0	DFT-s-OFDM 16 QAM	1@50	21.86	16.22	0.0419
5	15	10	177800	844.0	DFT-s-OFDM 64 QAM	25@12	20.21	14.57	0.0286
5	15	10	177800	844.0	DFT-s-OFDM 64 QAM	1@1	19.98	14.34	0.0272
5	15	10	177800	844.0	DFT-s-OFDM 64 QAM	1@50	20.07	14.43	0.0277
5	15	10	177800	844.0	DFT-s-OFDM 256 QAM	25@12	18.34	12.7	0.0186
5	15	10	177800	844.0	DFT-s-OFDM 256 QAM	1@1	17.71	12.07	0.0161
5	15	10	177800	844.0	DFT-s-OFDM 256 QAM	1@50	17.73	12.09	0.0162
5	15	10	177800	844.0	CP-OFDM QPSK	26@13	21.22	15.58	0.0361
5	15	10	177800	844.0	CP-OFDM QPSK	1@1	21.02	15.38	0.0345
5	15	10	177800	844.0	CP-OFDM QPSK	1@50	21.11	15.47	0.0352
5	15	15	175300	831.5	DFT-s-OFDM PI/2 BPSK	36@18	22.74	17.1	0.0513
5	15	15	175300	831.5	DFT-s-OFDM PI/2 BPSK	1@1	22.31	16.67	0.0465
5	15	15	175300	831.5	DFT-s-OFDM PI/2 BPSK	1@77	22.53	16.89	0.0489
5	15	15	175300	831.5	DFT-s-OFDM QPSK	36@18	22.79	17.15	0.0519
5	15	15	175300	831.5	DFT-s-OFDM QPSK	1@1	22.52	16.88	0.0488
5	15	15	175300	831.5	DFT-s-OFDM QPSK	1@77	22.73	17.09	0.0512
5	15	15	175300	831.5	DFT-s-OFDM 16 QAM	36@18	21.71	16.07	0.0405

5	15	15	175300	831.5	DFT-s-OFDM 16 QAM	1@1	21.72	16.08	0.0406
5	15	15	175300	831.5	DFT-s-OFDM 16 QAM	1@77	21.92	16.28	0.0425
5	15	15	175300	831.5	DFT-s-OFDM 64 QAM	36@18	20.25	14.61	0.0289
5	15	15	175300	831.5	DFT-s-OFDM 64 QAM	1@1	19.94	14.3	0.0269
5	15	15	175300	831.5	DFT-s-OFDM 64 QAM	1@77	20.11	14.47	0.028
5	15	15	175300	831.5	DFT-s-OFDM 256 QAM	36@18	18.23	12.59	0.0182
5	15	15	175300	831.5	DFT-s-OFDM 256 QAM	1@1	17.58	11.94	0.0156
5	15	15	175300	831.5	DFT-s-OFDM 256 QAM	1@77	17.8	12.16	0.0164
5	15	15	175300	831.5	CP-OFDM QPSK	39@191	19.72	14.08	0.0256
5	15	15	175300	831.5	CP-OFDM QPSK	1@1	20.98	15.34	0.0342
5	15	15	175300	831.5	CP-OFDM QPSK	1@77	21.2	15.56	0.036
5	15	15	176300	836.5	DFT-s-OFDM PI/2 BPSK	36@18	22.59	16.95	0.0495
5	15	15	176300	836.5	DFT-s-OFDM PI/2 BPSK	1@1	22.38	16.74	0.0472
5	15	15	176300	836.5	DFT-s-OFDM PI/2 BPSK	1@77	22.61	16.97	0.0498
5	15	15	176300	836.5	DFT-s-OFDM QPSK	36@18	22.66	17.02	0.0504
5	15	15	176300	836.5	DFT-s-OFDM QPSK	1@1	22.61	16.97	0.0498
5	15	15	176300	836.5	DFT-s-OFDM QPSK	1@77	22.79	17.15	0.0519
5	15	15	176300	836.5	DFT-s-OFDM 16 QAM	36@18	21.82	16.18	0.0415
5	15	15	176300	836.5	DFT-s-OFDM 16 QAM	1@1	21.76	16.12	0.0409
5	15	15	176300	836.5	DFT-s-OFDM 16 QAM	1@77	21.92	16.28	0.0425
5	15	15	176300	836.5	DFT-s-OFDM 64 QAM	36@18	20.33	14.69	0.0294
5	15	15	176300	836.5	DFT-s-OFDM 64 QAM	1@1	20.09	14.45	0.0279
5	15	15	176300	836.5	DFT-s-OFDM 64 QAM	1@77	20.21	14.57	0.0286
5	15	15	176300	836.5	DFT-s-OFDM 256 QAM	36@18	18.31	12.67	0.0185

5	15	15	176300	836.5	DFT-s-OFDM 256 QAM	1@1	17.66	12.02	0.0159
5	15	15	176300	836.5	DFT-s-OFDM 256 QAM	1@77	17.86	12.22	0.0167
5	15	15	176300	836.5	CP-OFDM QPSK	39@191	19.75	14.11	0.0258
5	15	15	176300	836.5	CP-OFDM QPSK	1@1	21.04	15.4	0.0347
5	15	15	176300	836.5	CP-OFDM QPSK	1@77	21.28	15.64	0.0366
5	15	15	177300	841.5	DFT-s-OFDM PI/2 BPSK	36@18	22.77	17.13	0.0516
5	15	15	177300	841.5	DFT-s-OFDM PI/2 BPSK	1@1	22.51	16.87	0.0486
5	15	15	177300	841.5	DFT-s-OFDM PI/2 BPSK	1@77	22.57	16.93	0.0493
5	15	15	177300	841.5	DFT-s-OFDM QPSK	36@18	22.73	17.09	0.0512
5	15	15	177300	841.5	DFT-s-OFDM QPSK	1@1	22.64	17.0	0.0501
5	15	15	177300	841.5	DFT-s-OFDM QPSK	1@77	22.82	17.18	0.0522
5	15	15	177300	841.5	DFT-s-OFDM 16 QAM	36@18	21.9	16.26	0.0423
5	15	15	177300	841.5	DFT-s-OFDM 16 QAM	1@1	21.85	16.21	0.0418
5	15	15	177300	841.5	DFT-s-OFDM 16 QAM	1@77	21.98	16.34	0.0431
5	15	15	177300	841.5	DFT-s-OFDM 64 QAM	36@18	20.39	14.75	0.0299
5	15	15	177300	841.5	DFT-s-OFDM 64 QAM	1@1	20.05	14.41	0.0276
5	15	15	177300	841.5	DFT-s-OFDM 64 QAM	1@77	20.21	14.57	0.0286
5	15	15	177300	841.5	DFT-s-OFDM 256 QAM	36@18	18.4	12.76	0.0189
5	15	15	177300	841.5	DFT-s-OFDM 256 QAM	1@1	17.76	12.12	0.0163
5	15	15	177300	841.5	DFT-s-OFDM 256 QAM	1@77	17.84	12.2	0.0166
5	15	15	177300	841.5	CP-OFDM QPSK	39@191	19.81	14.17	0.0261
5	15	15	177300	841.5	CP-OFDM QPSK	1@1	21.11	15.47	0.0352
5	15	15	177300	841.5	CP-OFDM QPSK	1@77	21.2	15.56	0.036
5	15	20	175800	834.0	DFT-s-OFDM PI/2 BPSK	50@25	22.63	16.99	0.05

5	15	20	175800	834.0	DFT-s-OFDM PI/2 BPSK	1@1	22.3	16.66	0.0463
5	15	20	175800	834.0	DFT-s-OFDM PI/2 BPSK	1@104	22.6	16.96	0.0497
5	15	20	175800	834.0	DFT-s-OFDM QPSK	50@25	22.61	16.97	0.0498
5	15	20	175800	834.0	DFT-s-OFDM QPSK	1@1	22.51	16.87	0.0486
5	15	20	175800	834.0	DFT-s-OFDM QPSK	1@104	22.78	17.14	0.0518
5	15	20	175800	834.0	DFT-s-OFDM 16 QAM	50@25	21.79	16.15	0.0412
5	15	20	175800	834.0	DFT-s-OFDM 16 QAM	1@1	21.72	16.08	0.0406
5	15	20	175800	834.0	DFT-s-OFDM 16 QAM	1@104	21.9	16.26	0.0423
5	15	20	175800	834.0	DFT-s-OFDM 64 QAM	50@25	20.37	14.73	0.0297
5	15	20	175800	834.0	DFT-s-OFDM 64 QAM	1@1	19.94	14.3	0.0269
5	15	20	175800	834.0	DFT-s-OFDM 64 QAM	1@104	20.17	14.53	0.0284
5	15	20	175800	834.0	DFT-s-OFDM 256 QAM	50@25	18.26	12.62	0.0183
5	15	20	175800	834.0	DFT-s-OFDM 256 QAM	1@1	17.61	11.97	0.0157
5	15	20	175800	834.0	DFT-s-OFDM 256 QAM	1@104	17.82	12.18	0.0165
5	15	20	175800	834.0	CP-OFDM QPSK	53@26	21.36	15.72	0.0373
5	15	20	175800	834.0	CP-OFDM QPSK	1@1	20.96	15.32	0.034
5	15	20	175800	834.0	CP-OFDM QPSK	1@104	21.31	15.67	0.0369
5	15	20	176300	836.5	DFT-s-OFDM PI/2 BPSK	50@25	22.73	17.09	0.0512
5	15	20	176300	836.5	DFT-s-OFDM PI/2 BPSK	1@1	22.42	16.78	0.0476
5	15	20	176300	836.5	DFT-s-OFDM PI/2 BPSK	1@104	22.58	16.94	0.0494
5	15	20	176300	836.5	DFT-s-OFDM QPSK	50@25	22.65	17.01	0.0502
5	15	20	176300	836.5	DFT-s-OFDM QPSK	1@1	22.63	16.99	0.05
5	15	20	176300	836.5	DFT-s-OFDM QPSK	1@104	22.84	17.2	0.0525
5	15	20	176300	836.5	DFT-s-OFDM 16 QAM	50@25	21.88	16.24	0.0421

5	15	20	176300	836.5	DFT-s-OFDM 16 QAM	1@1	21.82	16.18	0.0415
5	15	20	176300	836.5	DFT-s-OFDM 16 QAM	1@104	21.95	16.31	0.0428
5	15	20	176300	836.5	DFT-s-OFDM 64 QAM	50@25	20.39	14.75	0.0299
5	15	20	176300	836.5	DFT-s-OFDM 64 QAM	1@1	20.05	14.41	0.0276
5	15	20	176300	836.5	DFT-s-OFDM 64 QAM	1@104	20.21	14.57	0.0286
5	15	20	176300	836.5	DFT-s-OFDM 256 QAM	50@25	18.3	12.66	0.0185
5	15	20	176300	836.5	DFT-s-OFDM 256 QAM	1@1	17.72	12.08	0.0161
5	15	20	176300	836.5	DFT-s-OFDM 256 QAM	1@104	17.84	12.2	0.0166
5	15	20	176300	836.5	CP-OFDM QPSK	53@26	21.39	15.75	0.0376
5	15	20	176300	836.5	CP-OFDM QPSK	1@1	21.08	15.44	0.035
5	15	20	176300	836.5	CP-OFDM QPSK	1@104	21.32	15.68	0.037
5	15	20	176800	839.0	DFT-s-OFDM PI/2 BPSK	50@25	22.7	17.06	0.0508
5	15	20	176800	839.0	DFT-s-OFDM PI/2 BPSK	1@1	22.43	16.79	0.0478
5	15	20	176800	839.0	DFT-s-OFDM PI/2 BPSK	1@104	22.56	16.92	0.0492
5	15	20	176800	839.0	DFT-s-OFDM QPSK	50@25	22.71	17.07	0.0509
5	15	20	176800	839.0	DFT-s-OFDM QPSK	1@1	22.6	16.96	0.0497
5	15	20	176800	839.0	DFT-s-OFDM QPSK	1@104	22.81	17.17	0.0521
5	15	20	176800	839.0	DFT-s-OFDM 16 QAM	50@25	21.97	16.33	0.043
5	15	20	176800	839.0	DFT-s-OFDM 16 QAM	1@1	21.82	16.18	0.0415
5	15	20	176800	839.0	DFT-s-OFDM 16 QAM	1@104	21.97	16.33	0.043
5	15	20	176800	839.0	DFT-s-OFDM 64 QAM	50@25	20.41	14.77	0.03
5	15	20	176800	839.0	DFT-s-OFDM 64 QAM	1@1	20.01	14.37	0.0274
5	15	20	176800	839.0	DFT-s-OFDM 64 QAM	1@104	20.19	14.55	0.0285
5	15	20	176800	839.0	DFT-s-OFDM 256 QAM	50@25	18.38	12.74	0.0188

5	15	20	176800	839.0	DFT-s-OFDM 256 QAM	1@1	17.7	12.06	0.0161
5	15	20	176800	839.0	DFT-s-OFDM 256 QAM	1@104	17.83	12.19	0.0166
5	15	20	176800	839.0	CP-OFDM QPSK	53@26	21.45	15.81	0.0381
5	15	20	176800	839.0	CP-OFDM QPSK	1@1	21.1	15.46	0.0352
5	15	20	176800	839.0	CP-OFDM QPSK	1@104	21.28	15.64	0.0366

Software Version: 21.02.052301

LTE Band: 7, LTE BW: 20M, LTE ARFCN: Mid

Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
5	15	20	176800	839.0	DFT-s-OFDM QPSK	100@0	-0.00405	PASS	NV
5	15	20	176800	839.0	DFT-s-OFDM QPSK	100@0	-0.00542	PASS	LV
5	15	20	176800	839.0	DFT-s-OFDM QPSK	100@0	-0.00223	PASS	HV
5	15	20	176800	839.0	DFT-s-OFDM QPSK	100@0	-0.00664	PASS	-30°C
5	15	20	176800	839.0	DFT-s-OFDM QPSK	100@0	-0.00526	PASS	-20°C
5	15	20	176800	839.0	DFT-s-OFDM QPSK	100@0	-0.00508	PASS	-10°C
5	15	20	176800	839.0	DFT-s-OFDM QPSK	100@0	-0.00391	PASS	0°C
5	15	20	176800	839.0	DFT-s-OFDM QPSK	100@0	-0.00358	PASS	10°C
5	15	20	176800	839.0	DFT-s-OFDM QPSK	100@0	-0.00386	PASS	20°C
5	15	20	176800	839.0	DFT-s-OFDM QPSK	100@0	-0.00698	PASS	30°C
5	15	20	176800	839.0	DFT-s-OFDM QPSK	100@0	-0.00564	PASS	40°C
5	15	20	176800	839.0	DFT-s-OFDM QPSK	100@0	-0.00684	PASS	50°C

Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
5	15	20	175800	834.0	DFT-s-OFDM PI/2 BPSK	100@0	4.07	13	PASS
5	15	20	175800	834.0	DFT-s-OFDM PI/2 BPSK	1@0	3.5	13	PASS
5	15	20	175800	834.0	DFT-s-OFDM QPSK	100@0	5.36	13	PASS
5	15	20	175800	834.0	DFT-s-OFDM QPSK	1@0	5.52	13	PASS
5	15	20	176300	836.5	DFT-s-OFDM PI/2 BPSK	100@0	3.98	13	PASS
5	15	20	176300	836.5	DFT-s-OFDM PI/2 BPSK	1@0	3.43	13	PASS
5	15	20	176300	836.5	DFT-s-OFDM QPSK	100@0	5.33	13	PASS
5	15	20	176300	836.5	DFT-s-OFDM QPSK	1@0	5.35	13	PASS
5	15	20	176800	839.0	DFT-s-OFDM PI/2 BPSK	100@0	4.19	13	PASS
5	15	20	176800	839.0	DFT-s-OFDM PI/2 BPSK	1@0	3.55	13	PASS
5	15	20	176800	839.0	DFT-s-OFDM QPSK	100@0	5.44	13	PASS
5	15	20	176800	839.0	DFT-s-OFDM QPSK	1@0	5.66	13	PASS

B7_N5(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Low_CH



B7_N5(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Low_CH



B7_N5(20M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH



B7_N5(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH



B7_N5(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH



B7_N5(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Mid_CH



B7_N5(20M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH



B7_N5(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH



B7_N5(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_High_CH



B7_N5(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_High_CH



B7_N5(20M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH




B7_N5(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH




Occupied Bandwidth

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB OBW (MHz)
5	15	5	176300	836.5	DFT-s-OFDM PI/2 BPSK	25@0	4.4649	4.838
5	15	5	176300	836.5	DFT-s-OFDM QPSK	25@0	4.4675	4.759
5	15	5	176300	836.5	CP-OFDM QPSK	25@0	4.4637	4.796
5	15	5	176300	836.5	CP-OFDM 16 QAM	25@0	4.4634	4.851
5	15	5	176300	836.5	CP-OFDM 64 QAM	25@0	4.463	4.854
5	15	5	176300	836.5	CP-OFDM 256 QAM	25@0	4.4559	4.783
5	15	10	176300	836.5	DFT-s-OFDM PI/2 BPSK	50@0	8.9157	9.41
5	15	10	176300	836.5	DFT-s-OFDM QPSK	50@0	8.93	9.591
5	15	10	176300	836.5	CP-OFDM QPSK	52@0	9.2823	9.879
5	15	10	176300	836.5	CP-OFDM 16 QAM	52@0	9.2723	9.777
5	15	10	176300	836.5	CP-OFDM 64 QAM	52@0	9.2846	9.894
5	15	10	176300	836.5	CP-OFDM 256 QAM	52@0	9.2658	9.874
5	15	15	176300	836.5	DFT-s-OFDM PI/2 BPSK	75@0	13.348	14.11
5	15	15	176300	836.5	DFT-s-OFDM QPSK	75@0	13.365	14.1
5	15	15	176300	836.5	CP-OFDM QPSK	79@0	14.06	14.71
5	15	15	176300	836.5	CP-OFDM 16 QAM	79@0	14.064	14.74
5	15	15	176300	836.5	CP-OFDM 64 QAM	79@0	14.059	14.74
5	15	15	176300	836.5	CP-OFDM 256 QAM	79@0	14.057	14.69
5	15	20	176300	836.5	DFT-s-OFDM PI/2 BPSK	100@0	17.82	18.84
5	15	20	176300	836.5	DFT-s-OFDM QPSK	100@0	17.826	18.85
5	15	20	176300	836.5	CP-OFDM QPSK	106@0	18.875	19.83
5	15	20	176300	836.5	CP-OFDM 16 QAM	106@0	18.903	19.82
5	15	20	176300	836.5	CP-OFDM 64 QAM	106@0	18.872	19.99
5	15	20	176300	836.5	CP-OFDM 256 QAM	106@0	18.867	19.8


B7_N5(5M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH

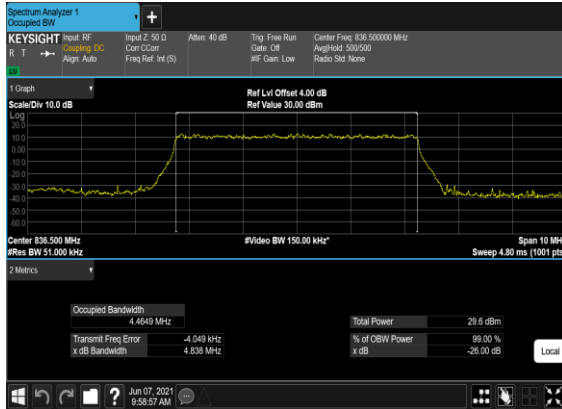


B7_N5(5M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

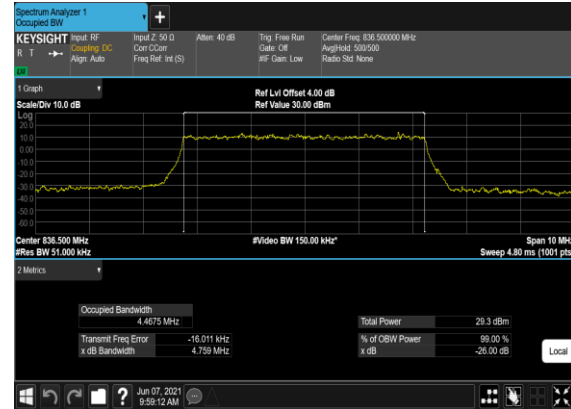


B7_N5(5M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

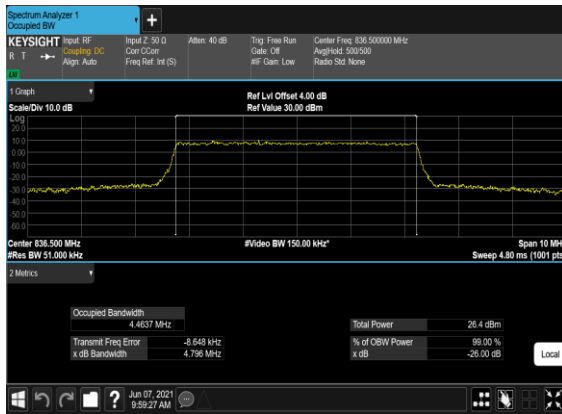


B7_N5(5M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

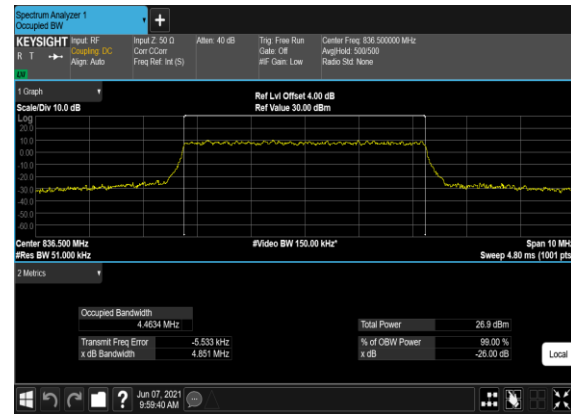

B7_N5(5M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

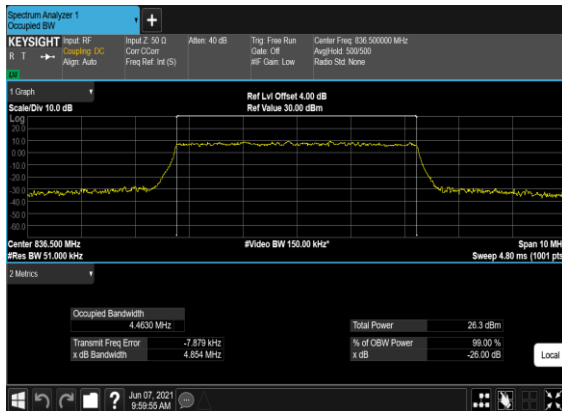


B7_N5(5M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

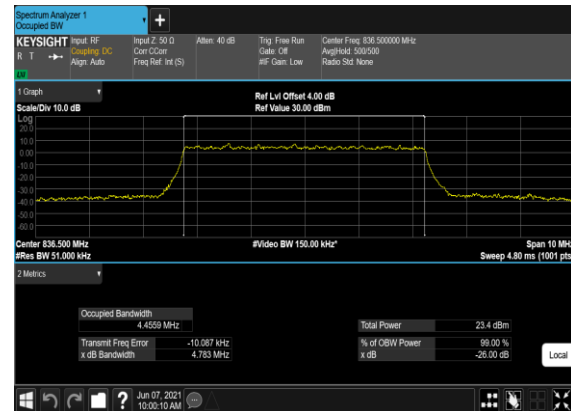


B7_N5(10M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH




B7_N5(10M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

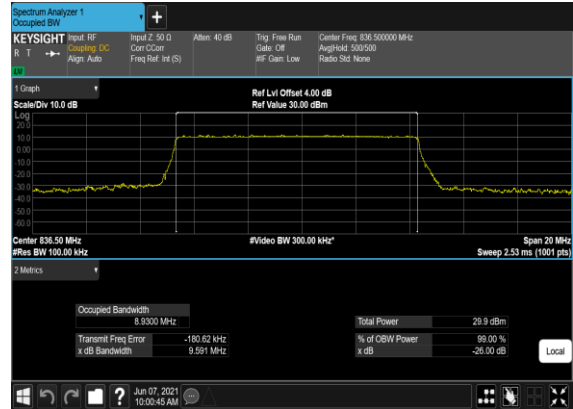


B7_N5(10M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

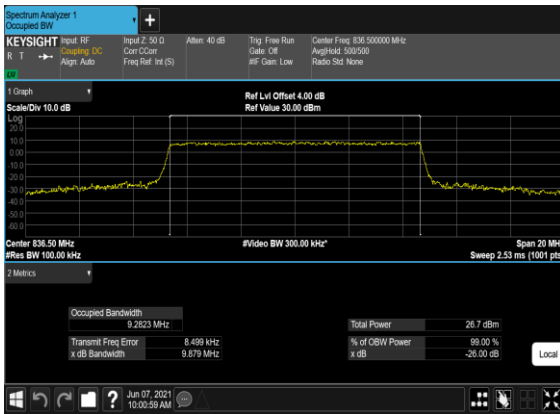


B7_N5(10M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

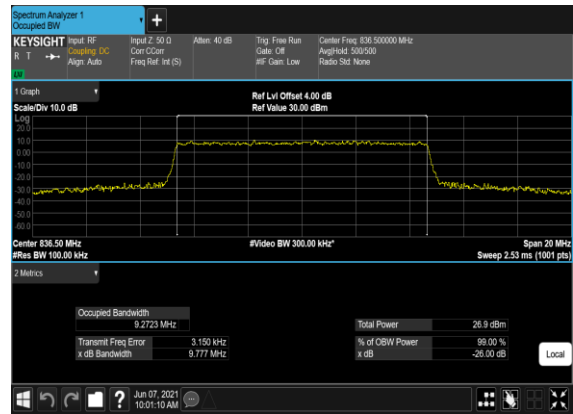


B7_N5(10M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

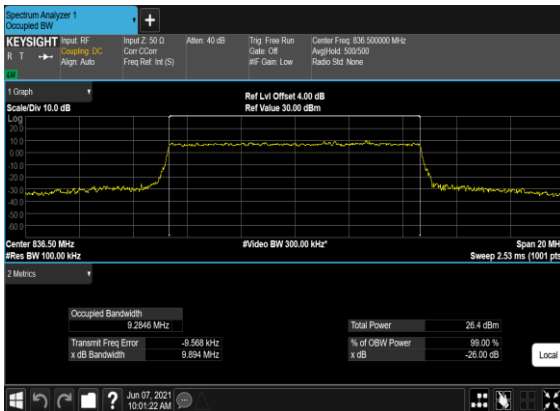


B7_N5(10M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

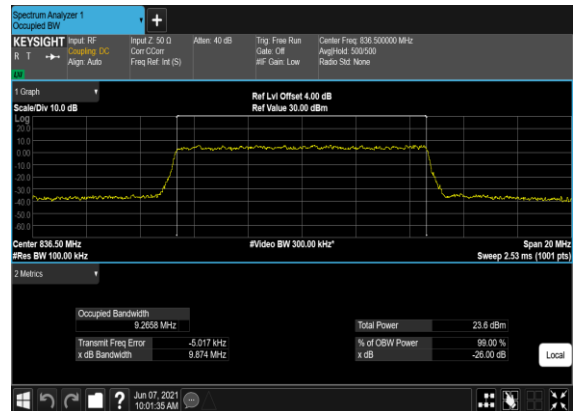


B7_N5(15M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH

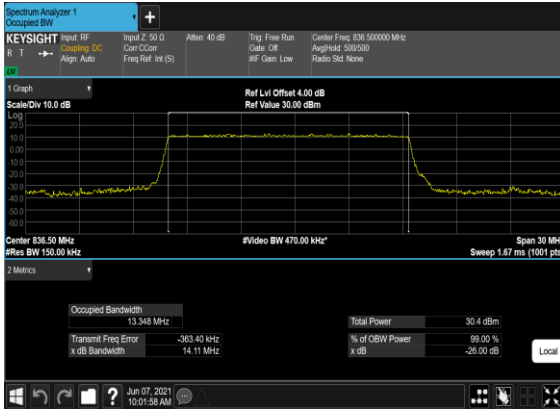


B7_N5(15M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

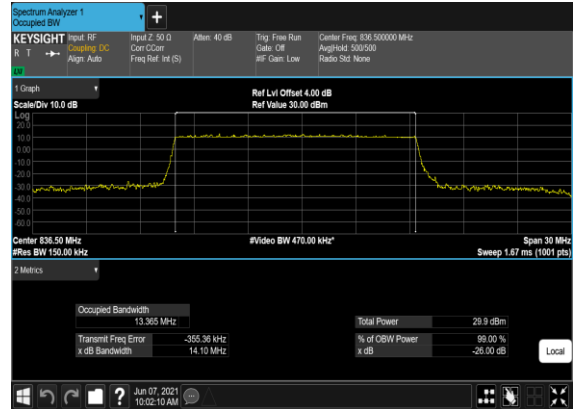


B7_N5(15M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

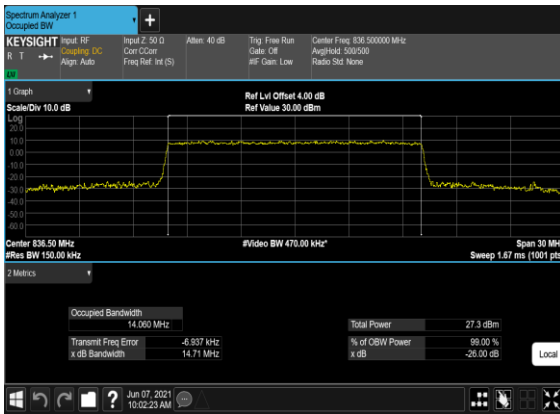


B7_N5(15M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

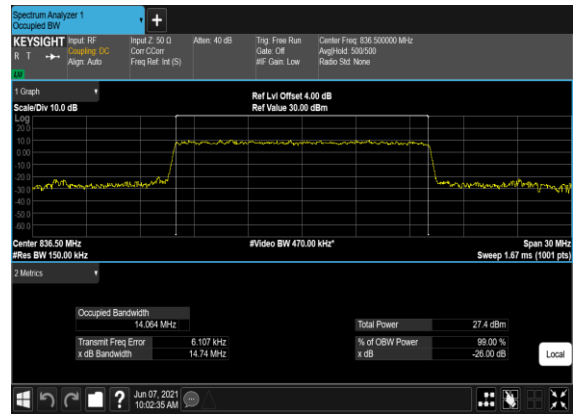


B7_N5(15M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

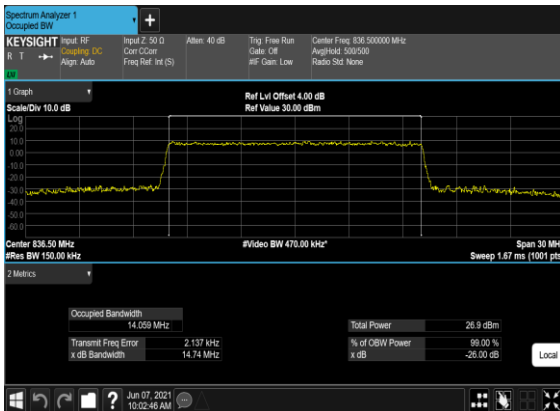


B7_N5(15M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

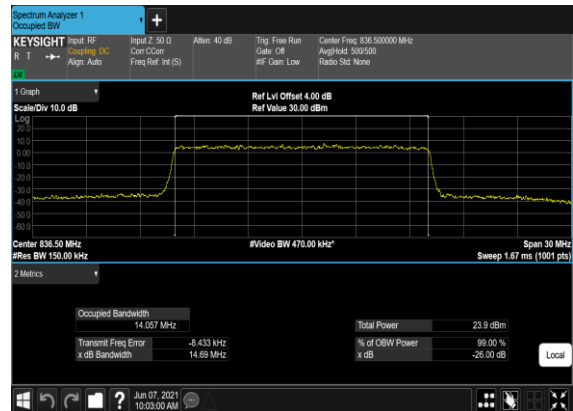


B7_N5(20M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH

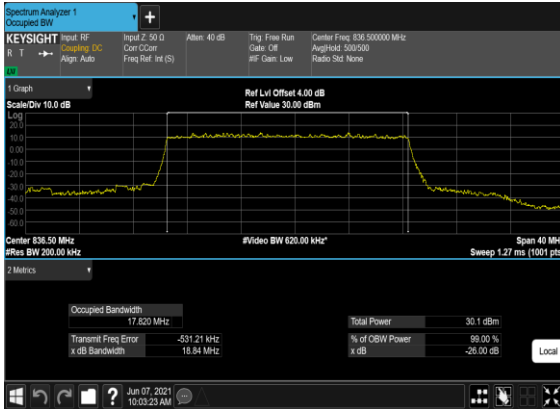


B7_N5(20M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

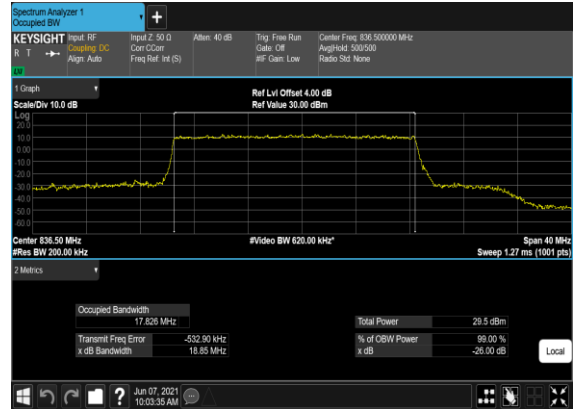


B7_N5(20M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

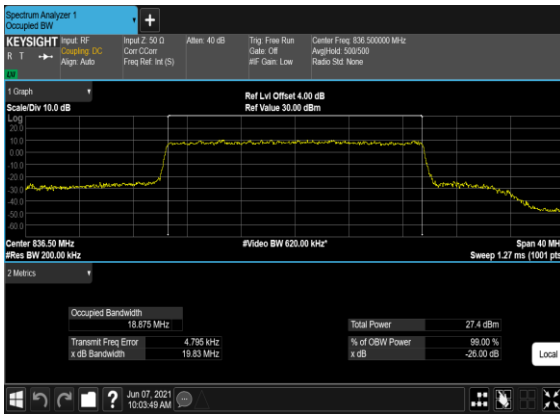


B7_N5(20M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

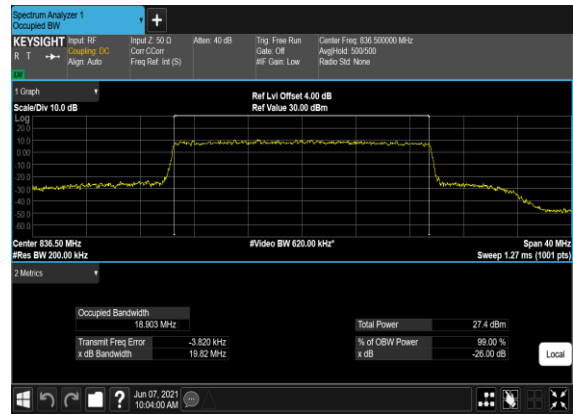

B7_N5(20M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

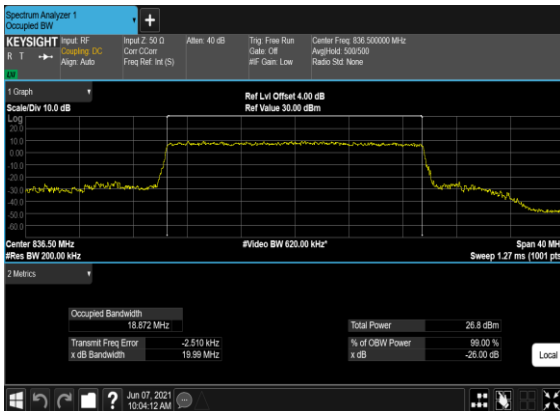

B7_N5(20M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

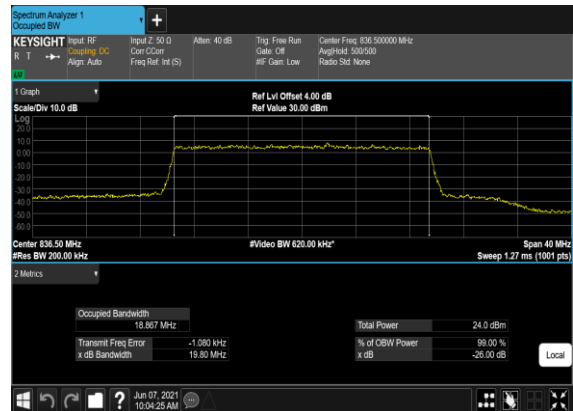


Conducted Spurious Emissions


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
5	15	5	174300	826.5	DFT-s-OFDM BPSK	1@0	see graph	---
5	15	5	174300	826.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
5	15	5	174300	826.5	DFT-s-OFDM QPSK	1@0	see graph	---
5	15	5	174300	826.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
5	15	5	176300	836.5	DFT-s-OFDM BPSK	1@0	see graph	---
5	15	5	176300	836.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
5	15	5	176300	836.5	DFT-s-OFDM QPSK	1@0	see graph	---
5	15	5	176300	836.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
5	15	5	178300	846.5	DFT-s-OFDM BPSK	1@0	see graph	---
5	15	5	178300	846.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
5	15	5	178300	846.5	DFT-s-OFDM QPSK	1@0	see graph	---
5	15	5	178300	846.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
5	15	10	174800	829.0	DFT-s-OFDM BPSK	1@0	see graph	---
5	15	10	174800	829.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
5	15	10	174800	829.0	DFT-s-OFDM QPSK	1@0	see graph	---
5	15	10	174800	829.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
5	15	10	176300	836.5	DFT-s-OFDM BPSK	1@0	see graph	---
5	15	10	176300	836.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
5	15	10	176300	836.5	DFT-s-OFDM QPSK	1@0	see graph	---
5	15	10	176300	836.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
5	15	10	177800	844.0	DFT-s-OFDM BPSK	1@0	see graph	---
5	15	10	177800	844.0	DFT-s-OFDM BPSK	1@0	see graph	PASS

5	15	10	177800	844.0	DFT-s-OFDM QPSK	1@0	see graph	---
5	15	10	177800	844.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
5	15	20	175800	834.0	DFT-s-OFDM BPSK	1@0	see graph	---
5	15	20	175800	834.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
5	15	20	175800	834.0	DFT-s-OFDM QPSK	1@0	see graph	---
5	15	20	175800	834.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
5	15	20	176300	836.5	DFT-s-OFDM BPSK	1@0	see graph	---
5	15	20	176300	836.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
5	15	20	176300	836.5	DFT-s-OFDM QPSK	1@0	see graph	---
5	15	20	176300	836.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
5	15	20	176800	839.0	DFT-s-OFDM BPSK	1@0	see graph	---
5	15	20	176800	839.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
5	15	20	176800	839.0	DFT-s-OFDM QPSK	1@0	see graph	---
5	15	20	176800	839.0	DFT-s-OFDM QPSK	1@0	see graph	PASS


B7_N5(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

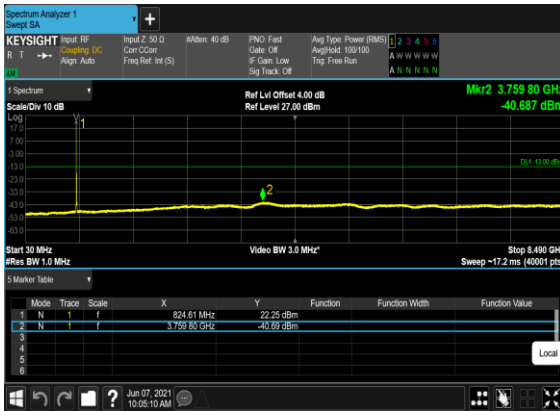

B7_N5(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

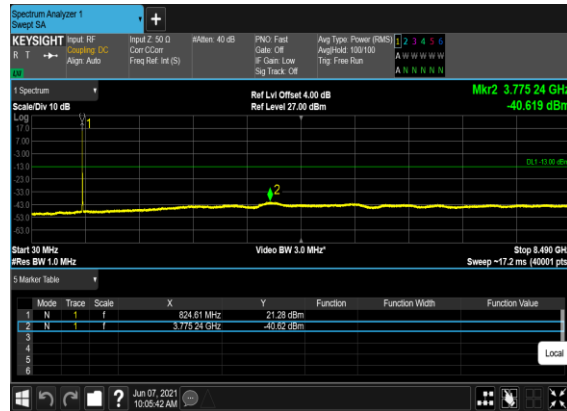


B7_N5(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

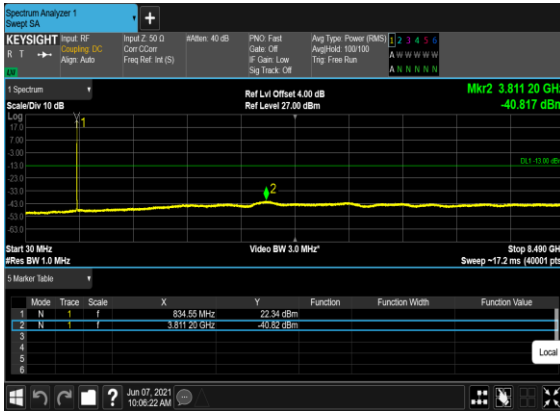


B7_N5(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH




B7_N5(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH

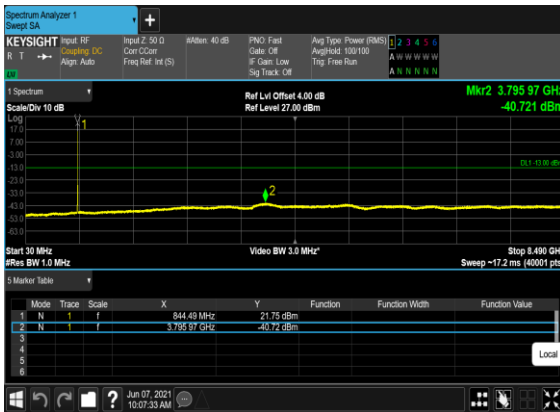

B7_N5(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

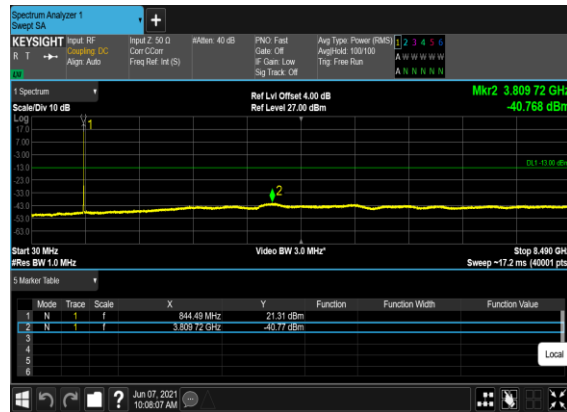


B7_N5(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

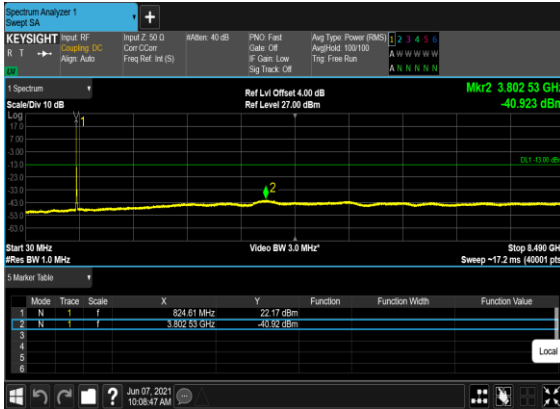


B7_N5(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH




B7_N5(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

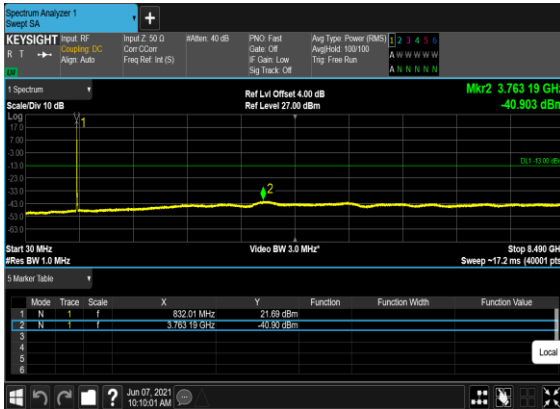


B7_N5(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

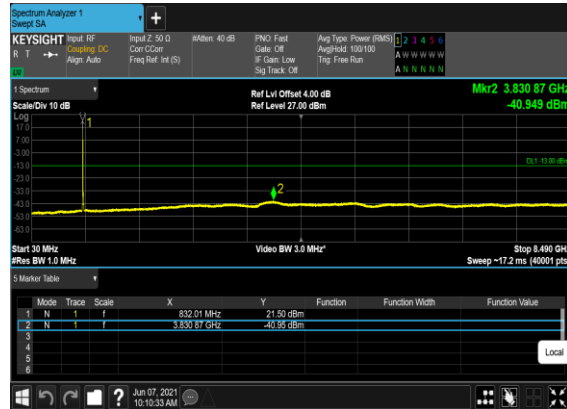

B7_N5(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

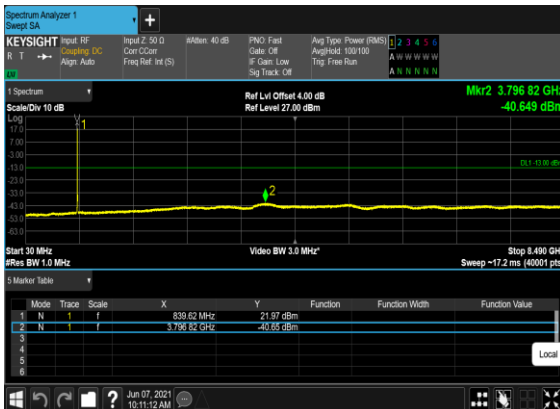


B7_N5(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

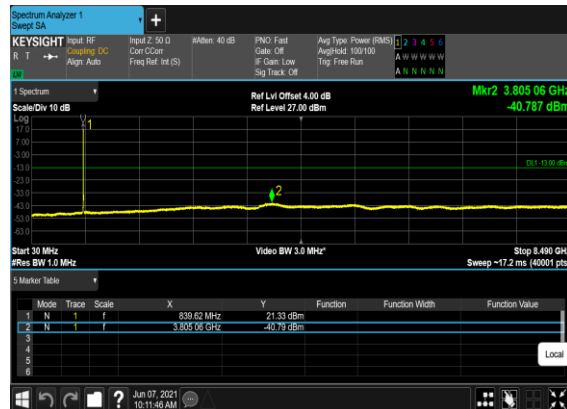


B7_N5(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH




B7_N5(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

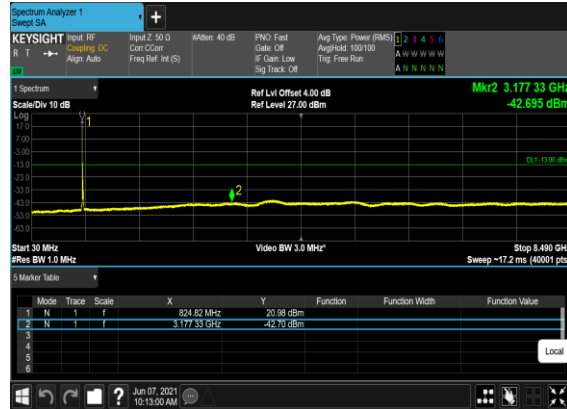


B7_N5(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

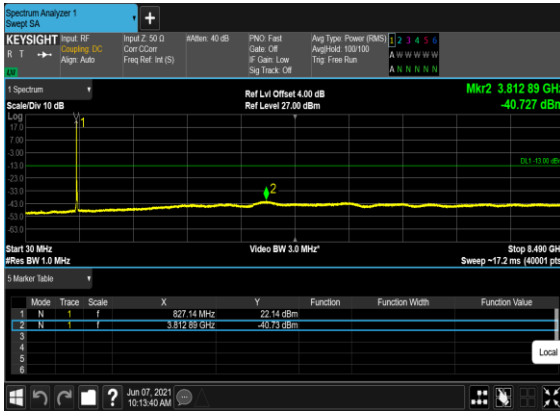


B7_N5(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

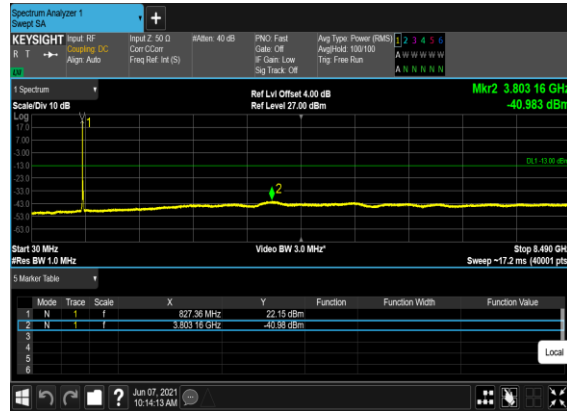

B7_N5(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

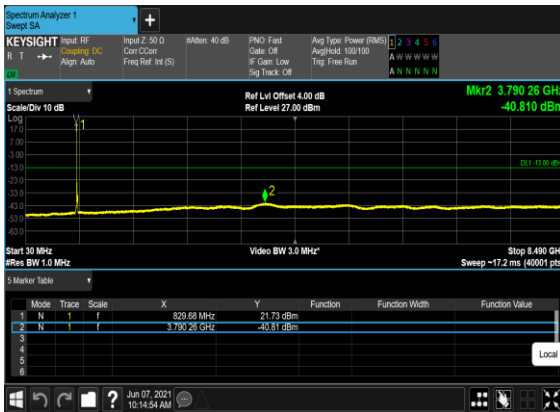

B7_N5(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

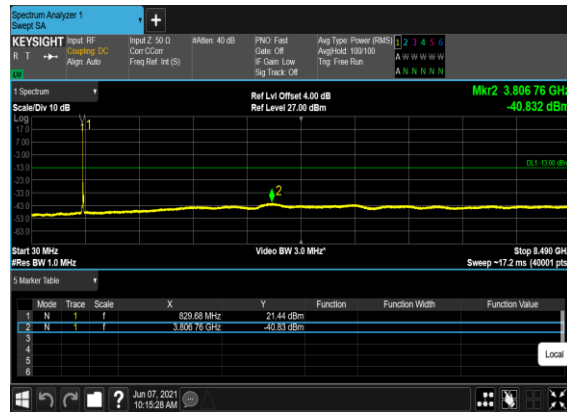

Conducted Band Edge


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
5	15	5	174300	826.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
5	15	5	174300	826.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
5	15	5	174300	826.5	DFT-s-OFDM BPSK	25@0	see graph	PASS
5	15	5	174300	826.5	DFT-s-OFDM QPSK	25@0	see graph	PASS
5	15	5	178300	846.5	DFT-s-OFDM BPSK	1@24	see graph	PASS
5	15	5	178300	846.5	DFT-s-OFDM QPSK	1@24	see graph	PASS
5	15	5	178300	846.5	DFT-s-OFDM BPSK	25@0	see graph	PASS
5	15	5	178300	846.5	DFT-s-OFDM QPSK	25@0	see graph	PASS
5	15	10	174800	829.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
5	15	10	174800	829.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
5	15	10	174800	829.0	DFT-s-OFDM BPSK	50@0	see graph	PASS
5	15	10	174800	829.0	DFT-s-OFDM QPSK	50@0	see graph	PASS
5	15	10	177800	844.0	DFT-s-OFDM BPSK	1@51	see graph	PASS
5	15	10	177800	844.0	DFT-s-OFDM QPSK	1@51	see graph	PASS
5	15	10	177800	844.0	DFT-s-OFDM BPSK	50@0	see graph	PASS
5	15	10	177800	844.0	DFT-s-OFDM QPSK	50@0	see graph	PASS
5	15	20	175800	834.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
5	15	20	175800	834.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
5	15	20	175800	834.0	DFT-s-OFDM BPSK	100@0	see graph	PASS
5	15	20	175800	834.0	DFT-s-OFDM QPSK	100@0	see graph	PASS
5	15	20	176800	839.0	DFT-s-OFDM BPSK	1@105	see graph	PASS
5	15	20	176800	839.0	DFT-s-OFDM QPSK	1@105	see graph	PASS

5	15	20	176800	839.0	DFT-s- OFDM BPSK	100@0	see graph	PASS
5	15	20	176800	839.0	DFT-s- OFDM QPSK	100@0	see graph	PASS


B7_N5(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH



B7_N5(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

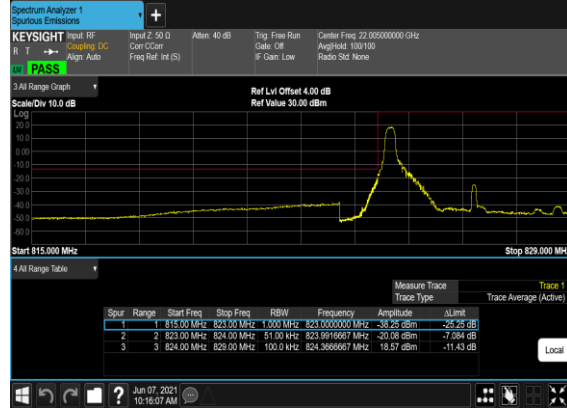


B7_N5(5M)_DFT-s-
OFDM_BPSK_Outer_Full_Low_CH

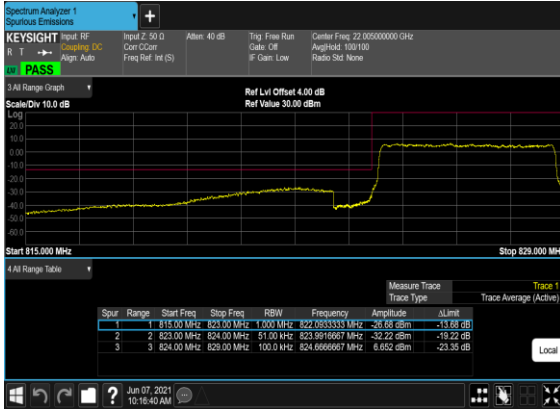


B7_N5(5M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH



B7_N5(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_High_CH

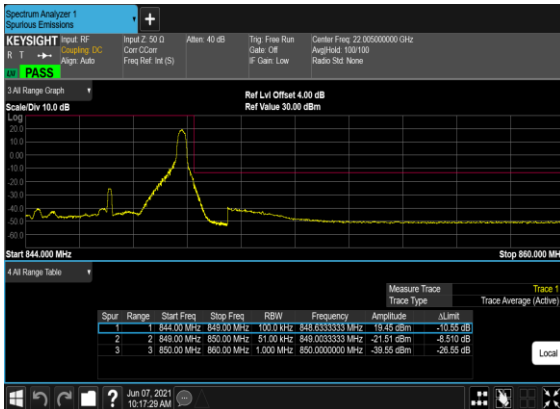

B7_N5(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_High_CH

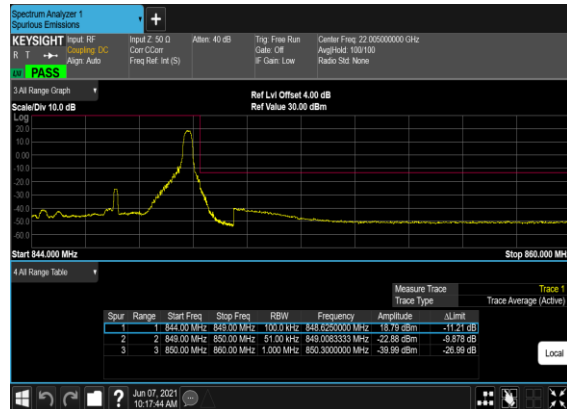


B7_N5(5M)_DFT-s-
OFDM_BPSK_Outer_Full_High_CH




B7_N5(5M)_DFT-s-
OFDM_QPSK_Outer_Full_High_CH




B7_N5(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

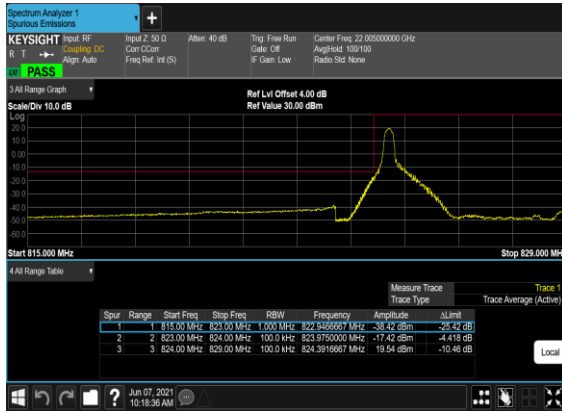


B7_N5(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

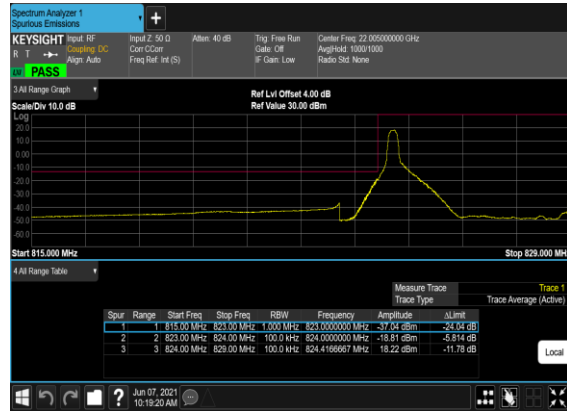


B7_N5(10M)_DFT-s-
OFDM_BPSK_Outer_Full_Low_CH

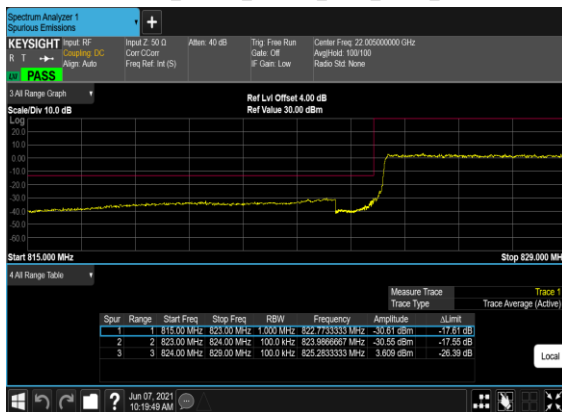


B7_N5(10M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH

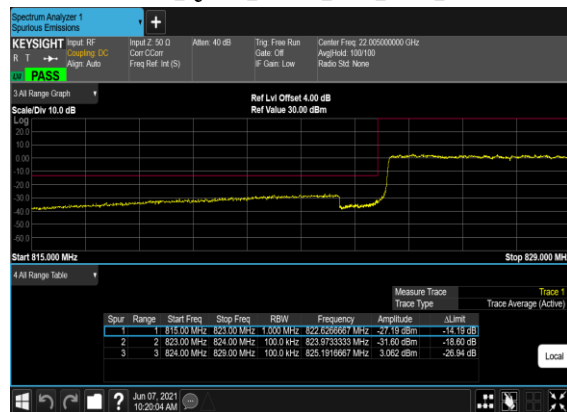

B7_N5(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_High_CH

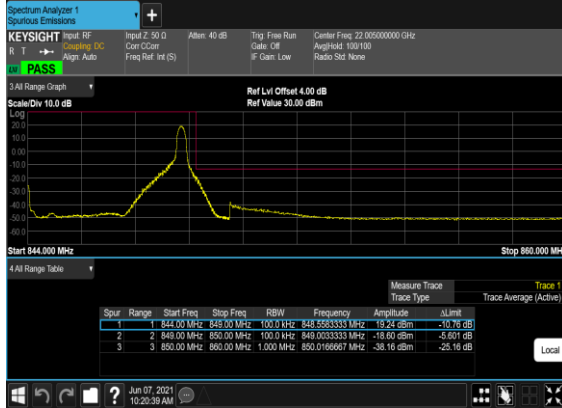


B7_N5(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_High_CH

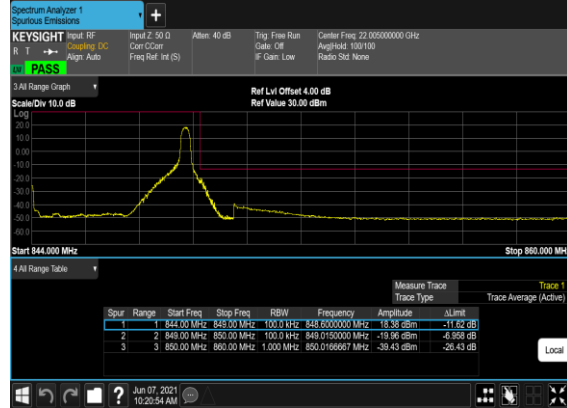

B7_N5(10M)_DFT-s-
OFDM_BPSK_Outer_Full_High_CH




B7_N5(10M)_DFT-s-
OFDM_QPSK_Outer_Full_High_CH

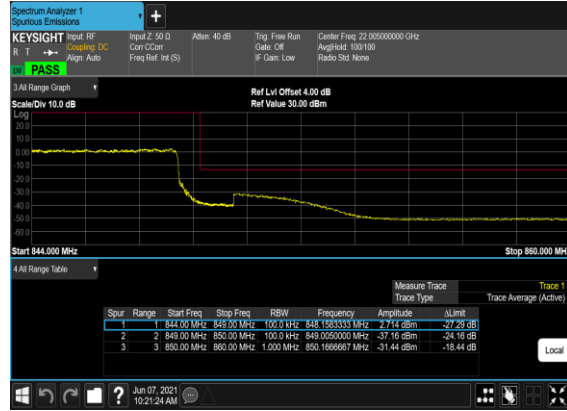

B7_N5(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH




B7_N5(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH_CHP_PASS

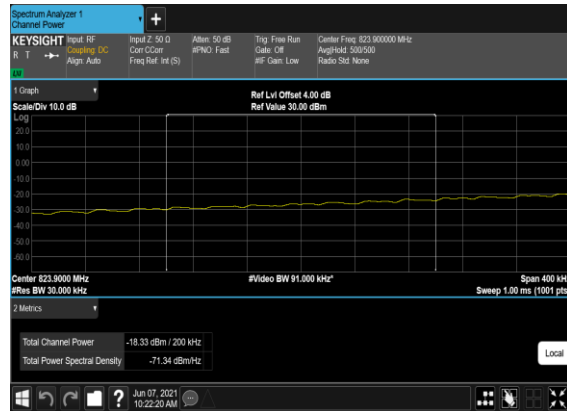


B7_N5(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH




B7_N5(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH_CHP_PASS

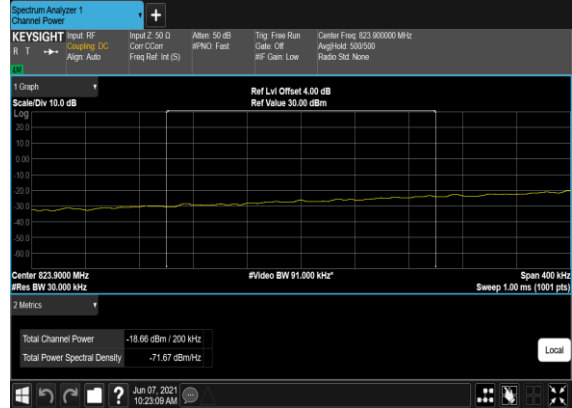

B7_N5(20M)_DFT-s-
OFDM_BPSK_Outer_Full_Low_CH

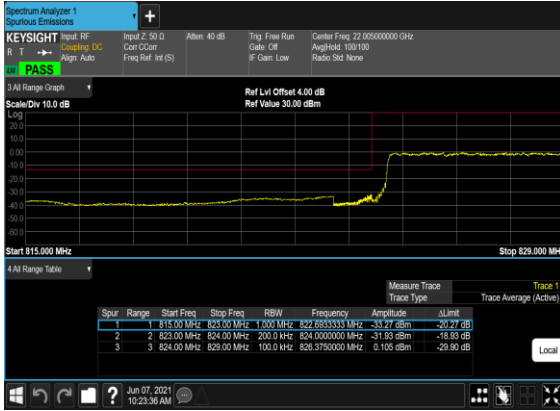


B7_N5(20M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH

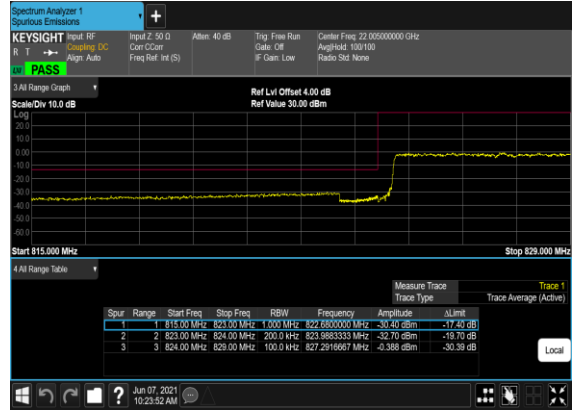


B7_N5(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_High_CH



B7_N5(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_High_CH_CHP_PASS

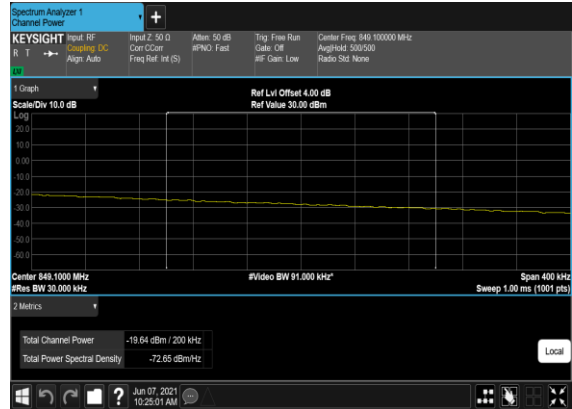

B7_N5(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_High_CH

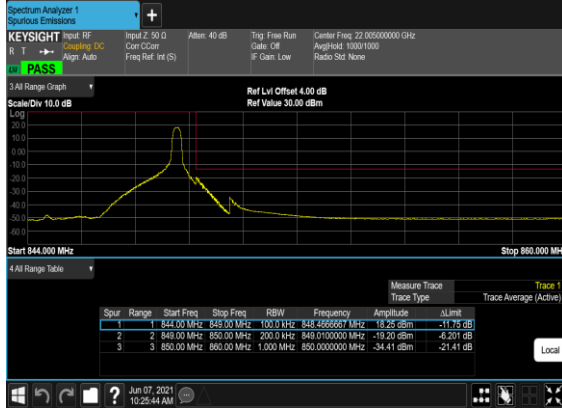

B7_N5(20M)_DFT-s-OFDM_BPSK_Outer_Full_High_CH



B7_N5(20M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH

