



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2149-1
FCC ID : IHDT56ZW1
STANDARD : 47 CFR Part 2, 22, 24, 27
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S) : May 08, 2021 ~ May 10, 2021

We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Jason Jia

Reviewed by: Jason Jia / Supervisor

Alex Wang

Approved by: Alex Wang / Manager



Sporton International (Kunshan) Inc.

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY... 3
SUMMARY OF TEST RESULT ... 4
1 GENERAL DESCRIPTION ... 5
1.1 Applicant ... 5
1.2 Manufacturer ... 5
1.3 Product Feature of Equipment Under Test ... 5
1.4 Product Specification of Equipment Under Test ... 6
1.5 Modification of EUT ... 6
1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator ... 7
1.7 Testing Location ... 9
1.8 Test Software ... 9
1.9 Applicable Standards ... 10
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ... 11
2.1 Test Mode ... 11
2.2 Connection Diagram of Test System ... 13
2.3 Support Unit used in test configuration and system ... 13
2.4 Measurement Results Explanation Example ... 13
2.5 Frequency List of Low/Middle/High Channels ... 14
3 CONDUCTED TEST ITEMS ... 17
3.1 Measuring Instruments ... 17
3.2 Test Setup ... 17
3.3 Test Result of Conducted Test ... 17
3.4 Conducted Output Power and ERP/EIRP ... 18
3.5 Peak-to-Average Ratio ... 19
3.6 Occupied Bandwidth ... 20
3.7 Conducted Band Edge ... 21
3.8 Conducted Spurious Emission ... 23
3.9 Frequency Stability ... 24
4 RADIATED TEST ITEMS ... 25
4.1 Measuring Instruments ... 25
4.2 Test Setup ... 25
4.3 Test Result of Radiated Test ... 25
4.4 Radiated Spurious Emission ... 26
5 LIST OF MEASURING EQUIPMENT ... 27
6 UNCERTAINTY OF EVALUATION ... 28
APPENDIX A. TEST RESULTS OF CONDUCTED TEST
APPENDIX B. TEST RESULTS OF RADIATED TEST
APPENDIX C. TEST SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG141508C	Rev. 01	Initial issue of report	May 24, 2021
FG141508C	Rev. 02	Add the sample 1(Ant.5-2nd) test data of the RSE for 5G NR n77/n78.	Jun. 07, 2021



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§22.913(a)(5)	Effective Radiated Power (5G NR n5)	ERP < 7 Watt		
	§27.50(h)(2)	Equivalent Isotropic Radiated Power (5G NR n7)	EIRP < 2Watt		
	§27.50(d)(4)	Equivalent Isotropic Radiated Power (5G NR n66,)	EIRP < 1Watt		
	§27.50(j)(3)	Equivalent Isotropic Radiated Power (5G NR n77, n78)	EIRP < 1Watt		
3.5	§24.232(d) §27.50(j)(4)	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a) §27.53(h) §27.53(l)(2)	Conducted Band Edge Measurement (5G NR n5) (5G NR n66) (5G NR n77, n78)	< 43+10log ₁₀ (P[Watts])	PASS	-
	§27.53(m)(4)	Conducted Band Edge Measurement (5G NR n7)	§27.53(m)(4)		
3.8	§2.1051 §22.917(a) §27.53(h) §27.53(l)(2)	Conducted Spurious Emission (5G NR n5) (5G NR n66) (5G NR n77, n78)	< 43+10log ₁₀ (P[Watts])	PASS	-
	§2.1051 §27.53(m)(4)	Conducted Spurious Emission (5G NR n7)	< 55+10log ₁₀ (P[Watts])		
3.9	§2.1055 §22.355	Frequency Stability Temperature & Voltage	< 2.5 ppm for Part 22	PASS	-
	§24.235 §27.54		Within Authorized Band		
4.4	§2.1053 §22.917(a) §27.53(h) §27.53(l)(2)	Radiated Spurious Emission (5G NR n5) (5G NR n66) (5G NR n77, n78)	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 17.33 dB at 5052.000 MHz
	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (5G NR n7)	< 55+10log ₁₀ (P[Watts])		

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2149-1
FCC ID	IHDT56ZW1
EUT supports Radios application	GSM/WCDMA/LTE/5G NR/NFC WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE FM Receiver and GNSS
IMEI Code	Conducted : 358869830031957&358869830031965 Radiation : 358869830032138/46
HW Version	DVT2
SW Version	RRS31.Q2
EUT Stage	Identical Prototype

Remark:

1. Only 5G NR bands are tested in this report, all the other RF bands are tested in the other reports separately.
2. There are two types of EUT, please refer to the product equality declaration exhibit submitted. According to the differences, we choose sample 1(Ant.5-1st) to perform full test and sample 1(Ant.5-2nd) to verify the test case of EIRP/RSE.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	5G NR n5 : 824 MHz ~ 849 MHz 5G NR n7 : 2500 MHz ~ 2570 MHz 5G NR n66 : 1710 MHz ~ 1780 MHz 5G NR n77: 3300 MHz ~ 4200 MHz 5G NR n78: 3300 MHz ~ 3800 MHz
Rx Frequency	5G NR n5 : 869 MHz ~ 894 MHz 5G NR n7 : 2620 MHz ~ 2690 MHz 5G NR n66 : 2110 MHz~ 2200 MHz 5G NR n77: 3300 MHz ~ 4200 MHz 5G NR n78: 3300 MHz ~ 3800 MHz
Bandwidth	n5, n7: 5MHz / 10MHz / 15MHz / 20MHz n66: 5MHz / 10MHz / 15MHz / 20MHz / 40MHz n77/n78: 10MHz / 15MHz / 20MHz / 40MHz / 50MHz / 60MHz / 70MHz / 80MHz / 90MHz / 100MHz
Antenna Gain (Maximum)	n5: -3.4 dBi n7: 0.4 dBi n66: -0.5 dBi n77: -4.05 dBi n78: -4.05 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

5G NR n5 (EN DC_7A-n5A)		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)
5	826.5 ~ 846.5	4M57G7D	0.0512	4M54W7D	0.0410
10	829.0 ~ 844.0	9M43G7D	0.0501	9M46W7D	0.0407
15	831.5 ~ 841.5	14M4G7D	0.0508	14M4W7D	0.0406
20	834.0 ~ 839.0	19M2G7D	0.0511	19M3W7D	0.0430
Frequency Tolerance (ppm)		-0.00873			

5G NR n7 (EN DC_5A-n7A)		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)
5	2502.5 ~ 2567.5	4M58G7D	0.2312	4M56W7D	0.1901
10	2505.0 ~ 2565.0	9M44G7D	0.2239	9M49W7D	0.1879
15	2507.5 ~ 2562.5	14M4G7D	0.2286	14M5W7D	0.1901
20	2510.0 ~ 2560.0	19M3G7D	0.2296	19M4W7D	0.1914
Frequency Tolerance (ppm)		-0.00859			

5G NR n66 (EN DC_7A-n66A)		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)
5	1712.5 ~ 1777.5	4M58G7D	0.1991	4M55W7D	0.1644
10	1715.0 ~ 1775.0	9M44G7D	0.1901	9M48W7D	0.1560
15	1717.5 ~ 1772.5	14M4G7D	0.1858	14M5W7D	0.1521
20	1720.0 ~ 1770.0	19M3G7D	0.1941	19M4W7D	0.1618
40	1730.0 ~ 1760.0	39M5G7D	0.1905	39M5W7D	0.1578
Frequency Tolerance (ppm)		-0.00528			



5G NR n77 (EN DC_41A-n77A)		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)
10	3705.0 ~ 3975.0	8M76G7D	0.0713	8M76W7D	0.0555
15	3707.5 ~ 3972.5	13M9G7D	0.0682	13M9W7D	0.0551
20	3710.0 ~ 3970.0	18M6G7D	0.0703	18M6W7D	0.0550
40	3720.0 ~ 3960.0	38M8G7D	0.0698	38M8W7D	0.0561
50	3725.0 ~ 3955.0	48M6G7D	0.0698	48M8W7D	0.0555
60	3730.0 ~ 3950.0	59M4G7D	0.0700	59M3W7D	0.0547
70	3735.0 ~ 3945.0	69M4G7D	0.0748	69M4W7D	0.0573
80	3740.0 ~ 3940.0	79M3G7D	0.0773	79M1W7D	0.0565
90	3745.0 ~ 3935.0	89M8G7D	0.0700	89M8W7D	0.0547
100	3750.0 ~ 3930.0	99M4G7D	0.0697	99M5W7D	0.0551
Frequency Tolerance (ppm)		-0.00181			

Note:

5G NR Band n77 overlaps the entire frequency range of Band n78. Therefore, the conducted test results provided in this report covers Band n77 as well as Band n78.



1.7 Testing Location

<FCC>-KS

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-KS	CN1257	314309

<FCC>-SZ

Sporton International (Shenzhen) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International (Shenzhen) Inc.		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ	CN1256	421272

1.8 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH04-KS	AUDIX	E3	6.2009-8-24a



1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22, 24, 27
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

All test items were verified and recorded according to the standards and without any deviation during the test.




2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.


Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			

Test Items	5G NR	Bandwidth (MHz)							Modulation					RB #		Test Channel		
		5	10	15	20	40	50-90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM	1	Full	L	M	H
Max. Output Power	n5	v	v	v	v	-	-	-	v	v	v	v	v	v	v	v	v	v
	n7	v	v	v	v	-	-	-	v	v	v	v	v	v	v	v	v	v
	n66	v	v	v	v	v	-	-	v	v	v	v	v	v	v	v	v	v
	n77	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	n78	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	n5				v	-	-	-	v	v					v	v	v	v
	n7				v	-	-	-	v	v					v	v	v	v
	n66				v	v	-	-	v	v					v	v	v	v
	n77	-			v	v	v	v	v	v					v	v	v	v
26dB and 99% Bandwidth	n5	v	v	v	v	-	-	-	v	v	v	v	v		v	v	v	v
	n7	v	v	v	v	-	-	-	v	v	v	v	v		v	v	v	v
	n66	v	v	v	v	v	-	-	v	v	v	v	v		v	v	v	v
	n77	-	v	v	v	v	v	v	v	v	v	v	v		v	v	v	v



Test Items	Band	Bandwidth (MHz)							Modulation					RB #		Test Channel		
		5	10	15	20	40	50-90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM	1	Full	L	M	H
Conducted Band Edge	n5	v	v	v	v	-	-	-	v	v				v	v	v		v
	n7	v	v	v	v	-	-	-	v	v				v	v	v		v
	n66	v	v	v	v	v	-	-	v	v				v	v	v		v
	n77	-	v	v	v	v	v	v	v	v				v	v	v		v
Conducted Spurious Emission	n5	v	v		v	-	-	-	v	v				v	v	v	v	v
	n7	v	v		v	-	-	-	v	v				v	v	v	v	v
	n66	v	v		v	v	-	-	v	v				v	v	v	v	v
	n77	-	v		v	v	v	v	v	v				v	v	v	v	v
Frequency Stability	n5				v	-	-	-	v						v		v	
	n7				v	-	-	-	v						v		v	
	n66				v	v	-	-	v						v		v	
	n77	-			v	v	v	v	v						v		v	
E.R.P / E.I.R.P	n5	v	v		v	-	-	-	v	v	v	v	v	v	v	v	v	v
	n7	v	v		v	-	-	-	v	v	v	v	v	v	v	v	v	v
	n66	v	v		v	v	-	-	v	v	v	v	v	v	v	v	v	v
	n77	-	v		v	v	v	v	v	v	v	v	v	v	v	v	v	v
Radiated Spurious Emission	n5	Worst Case															v	
	n7	Worst Case															v	
	n66	Worst Case															v	
	n77	Worst Case															v	
Note	<ol style="list-style-type: none"> The mark "v" means that this configuration is chosen for testing The mark "-" means that this bandwidth is not supported. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 5G NR supports NSA mode only (refer to the Operation Description), based on engineering evaluation, and according to the maximum power, only show the worst EN-DC mode in the report. For modulation of CP-OFDM and DFT-s-OFDM, the maximum power of CP-OFDM is lower than DFT-s-OFDM modulation, therefore, we chose higher power (DFT-s-OFDM modulation) to perform all tests and show in the report. Based on engineering evaluation, only the worst test results of modulations are shown in the report. 																	

2.2 Connection Diagram of Test System

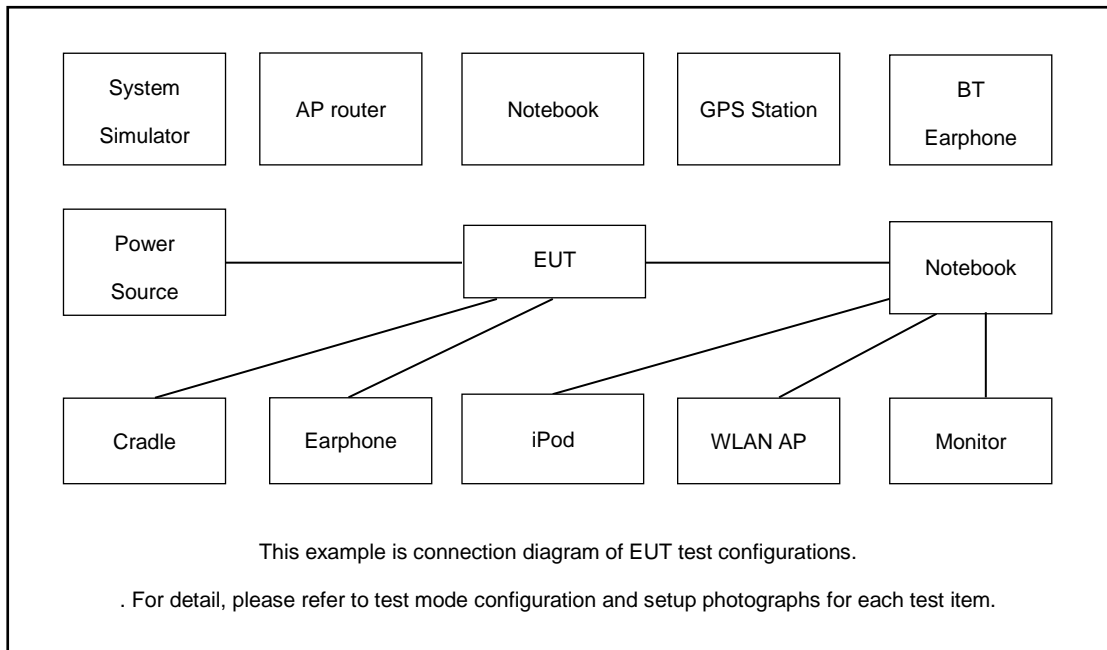

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5.2 dB and 10dB attenuator.

Example :

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

$$= 5.2 + 10 = 15.2 \text{ (dB)}$$



2.5 Frequency List of Low/Middle/High Channels

5G NR n5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	166800	167300	167800
	Frequency	834	836.5	839
15	Channel	166300	167300	168300
	Frequency	831.5	836.5	841.5
10	Channel	165800	167300	168800
	Frequency	829	836.5	844
5	Channel	165300	167300	169300
	Frequency	826.5	836.5	846.5

5G NR n7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	502000	507000	512000
	Frequency	2510	2535	2560
15	Channel	501500	507000	512500
	Frequency	2507.5	2535	2562.5
10	Channel	501000	507000	513000
	Frequency	2505	2535	2565
5	Channel	500500	507000	513500
	Frequency	2502.5	2535	2567.5

5G NR n66 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	346000	349000	352000
	Frequency	1730	1745	1760
20	Channel	344000	349000	354000
	Frequency	1720	1745	1770
15	Channel	343500	349000	354500
	Frequency	1717.5	1745	1772.5
10	Channel	343000	349000	355000
	Frequency	1715	1745	1775
5	Channel	342500	349000	355500
	Frequency	1712.5	1745	1777.5



5G NR n77 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	650000	656000	662000
	Frequency	3750	3840	3930
90	Channel	649668	656000	662334
	Frequency	3745.02	3840	3935.01
80	Channel	649334	656000	662668
	Frequency	3740.01	3840	3940.02
70	Channel	649000	656000	663000
	Frequency	3735	3840	3945
60	Channel	648668	656000	663334
	Frequency	3730.02	3840	3950.01
50	Channel	648334	656000	663668
	Frequency	3725.01	3840	3955.02
40	Channel	648000	656000	664000
	Frequency	3720	3840	3960
20	Channel	647334	656000	664668
	Frequency	3710.01	3840	3970.02
15	Channel	647166	656000	664833
	Frequency	3707.49	3840	3972.49
10	Channel	647000	656000	665000
	Frequency	3705	3840	3975



5G NR n78 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	650000		
	Frequency	3750		
90	Channel	649668	650000	650334
	Frequency	3745.02	3750	3755.01
80	Channel	649334	650000	650668
	Frequency	3740.01	3750	3760.02
70	Channel	649000	650000	651002
	Frequency	3735	3750	3765
60	Channel	648668	650000	651334
	Frequency	3730.02	3750	3770.01
50	Channel	648334	650000	651668
	Frequency	3725.01	3750	3775.02
40	Channel	648000	650000	652000
	Frequency	3720	3750	3780
20	Channel	647334	650000	652668
	Frequency	3710.01	3750	3790.02
15	Channel	647166	650000	652832
	Frequency	3707.49	3750	3792.48
10	Channel	647000	650000	653000
	Frequency	3705	3750	3795


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

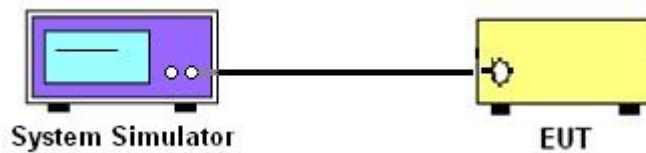

3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

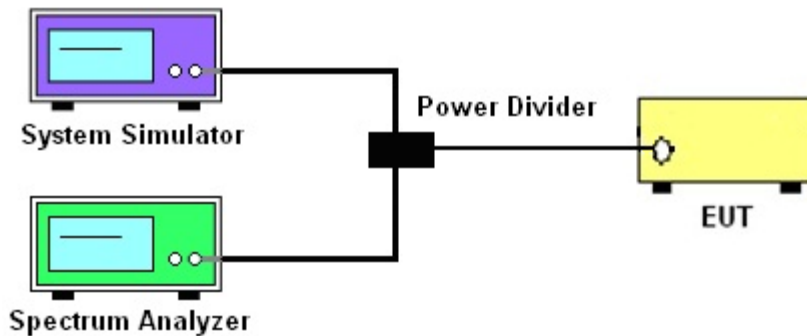

3.2.3 Frequency Stability

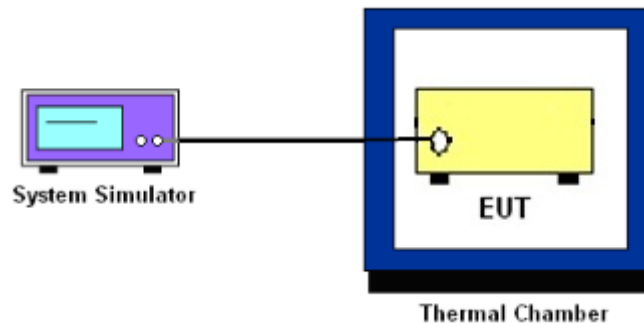

3.3 Test Result of Conducted Test

Please refer to Appendix A.



3.4 Conducted Output Power and ERP/EIRP

3.4.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for 5G NR n5.

The EIRP of mobile transmitters must not exceed 2 Watts for 5G NR n7.

The EIRP of mobile transmitters must not exceed 1 Watts for 5G NR n66, n77, n78.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.



3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.



3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power P(Watts) in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53 (h)

For operations in the 1710 – 1755 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power P(Watts) in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53(m)(4)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

27.53(l)(2)

For mobile operations in the 3700-3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz. Compliance with this paragraph is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be either one percent of the emission bandwidth of the fundamental emission of the transmitter or 350 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.



3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW \geq 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB) = -13dBm.

9. For 5G NR n7, the other 40 dB, and 55 dB have additionally applied same calculation above.



3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For 5G NR n7:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13$ dBm.
11. For 5G NR n7
The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [55 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[55 + 10\log(P)]$ (dB)
 $= -25$ dBm.



3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz

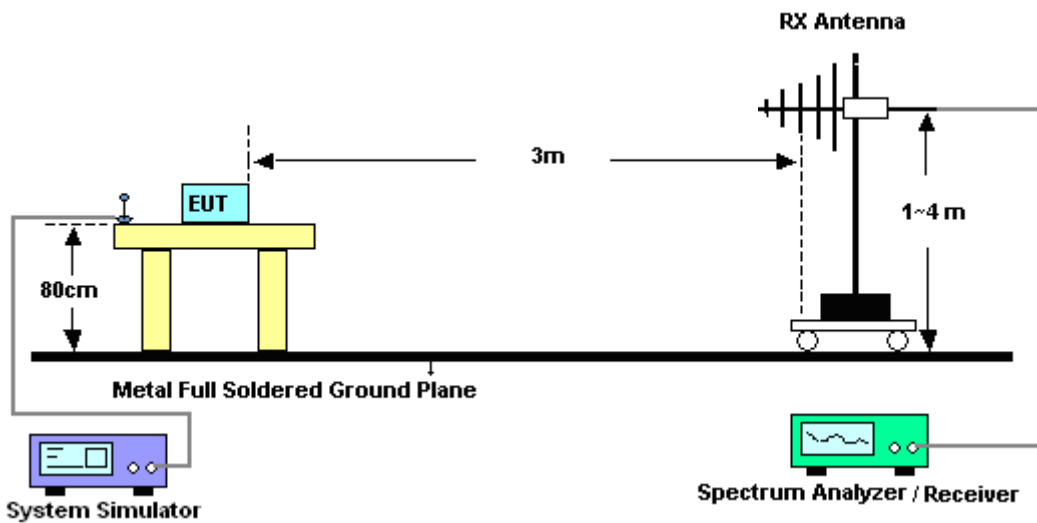

4.2.2 For radiated test above 1GHz

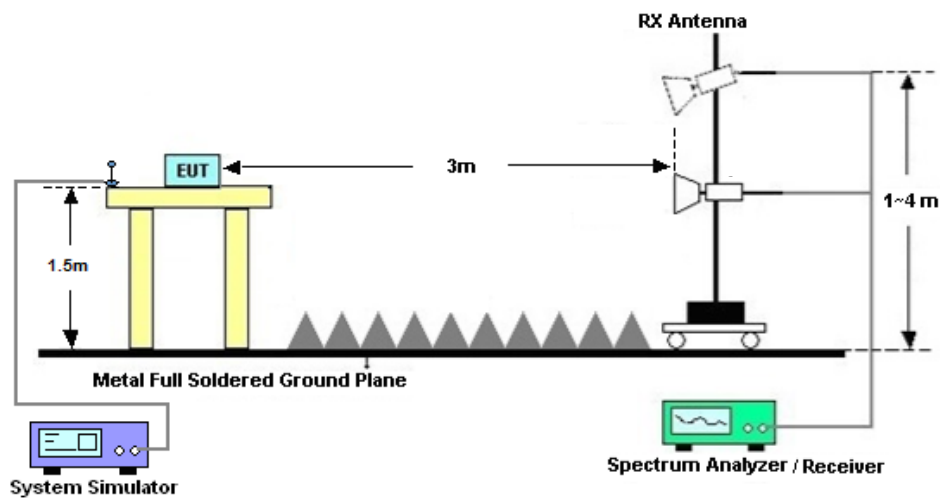

4.3 Test Result of Radiated Test

Please refer to Appendix B.



4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For 5G NR n7

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP (dBm) = S.G. Power - Tx Cable Loss + Tx Antenna Gain$
11. $ERP (dBm) = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] (dB)$
 $= [30 + 10\log(P)] (dBm) - [43 + 10\log(P)] (dB)$
 $= -13dBm.$

13. For 5G NR n7:

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 08, 2021	May 10, 2021~ Jun. 02, 2021	Apr. 07, 2022	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Jul. 22, 2020	May 10, 2021~ Jun. 02, 2021	Jul. 21, 2021	Conducted (TH01-SZ)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz-44G,MAX 30dB	Apr.13, 2021	May 08, 2021~ Jun. 02, 2021	Apr. 12, 2022	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz-1GHz	Jan. 02, 2021	May 08, 2021~ Jun. 02, 2021	Jan. 01, 2022	Radiation (03CH04-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	1356	1GHz~18GHz	Apr. 18, 2021	May 08, 2021~ Jun. 02, 2021	Apr. 17, 2022	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Nov. 09, 2020	May 08, 2021~ Jun. 02, 2021	Nov. 08, 2021	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	Jan. 02, 2021	May 08, 2021~ Jun. 02, 2021	Jan. 01, 2022	Radiation (03CH04-KS)
Amplifier	MITEQ	EM18G40G GA	060728	18~40GHz	Jan. 07, 2021	May 08, 2021~ Jun. 02, 2021	Jan. 06, 2022	Radiation (03CH04-KS)
high gain Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P	2025788	1Ghz-18Ghz	Jan. 02, 2021	May 08, 2021~ Jun. 02, 2021	Jan. 01, 2022	Radiation (03CH04-KS)
Amplifier	Keysight	83017A	MY57280106	500MHz~26.5GHz	Oct. 14, 2020	May 08, 2021~ Jun. 02, 2021	Oct. 13, 2021	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	May 08, 2021~ Jun. 02, 2021	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	May 08, 2021~ Jun. 02, 2021	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	May 08, 2021~ Jun. 02, 2021	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required



6 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.3dB
---	-------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8dB
---	-------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8dB
---	-------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power and EIRP)

FR1 N5

LTE Band: 7, LTE BW: 20M, LTE ARFCN: Mid

Transmitter Conducted Output Power And ERP/EIRP, ($G_T - L_C$)=-3.4dB

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	ERP (dBm)	ERP (W)
5	15	5	174300	826.5	DFT-s-OFDM PI/2 BPSK	12@6	22.11	16.57	0.0454
5	15	5	174300	826.5	DFT-s-OFDM PI/2 BPSK	1@1	22.53	16.99	0.05
5	15	5	174300	826.5	DFT-s-OFDM PI/2 BPSK	1@23	22.47	16.93	0.0493
5	15	5	174300	826.5	DFT-s-OFDM QPSK	12@6	22.63	17.09	0.0512
5	15	5	174300	826.5	DFT-s-OFDM QPSK	1@1	22.62	17.08	0.0511
5	15	5	174300	826.5	DFT-s-OFDM QPSK	1@23	22.56	17.02	0.0504
5	15	5	174300	826.5	DFT-s-OFDM 16 QAM	12@6	21.67	16.13	0.041
5	15	5	174300	826.5	DFT-s-OFDM 16 QAM	1@1	21.45	15.91	0.039
5	15	5	174300	826.5	DFT-s-OFDM 16 QAM	1@23	21.39	15.85	0.0385
5	15	5	174300	826.5	DFT-s-OFDM 64 QAM	12@6	20.06	14.52	0.0283
5	15	5	174300	826.5	DFT-s-OFDM 64 QAM	1@1	20.36	14.82	0.0303
5	15	5	174300	826.5	DFT-s-OFDM 64 QAM	1@23	20.31	14.77	0.03
5	15	5	174300	826.5	DFT-s-OFDM 256 QAM	12@6	18.09	12.55	0.018
5	15	5	174300	826.5	DFT-s-OFDM 256 QAM	1@1	18.22	12.68	0.0185
5	15	5	174300	826.5	DFT-s-OFDM 256 QAM	1@23	18.21	12.67	0.0185
5	15	5	174300	826.5	CP-OFDM QPSK	13@6	21.07	15.53	0.0357
5	15	5	174300	826.5	CP-OFDM QPSK	1@1	21.41	15.87	0.0386
5	15	5	174300	826.5	CP-OFDM QPSK	1@23	21.33	15.79	0.0379

5	15	5	176300	836.5	DFT-s-OFDM PI/2 BPSK	12@6	22.51	16.97	0.0498
5	15	5	176300	836.5	DFT-s-OFDM PI/2 BPSK	1@1	22.43	16.89	0.0489
5	15	5	176300	836.5	DFT-s-OFDM PI/2 BPSK	1@23	22.45	16.91	0.0491
5	15	5	176300	836.5	DFT-s-OFDM QPSK	12@6	22.56	17.02	0.0504
5	15	5	176300	836.5	DFT-s-OFDM QPSK	1@1	22.56	17.02	0.0504
5	15	5	176300	836.5	DFT-s-OFDM QPSK	1@23	22.53	16.99	0.05
5	15	5	176300	836.5	DFT-s-OFDM 16 QAM	12@6	21.54	16.0	0.0398
5	15	5	176300	836.5	DFT-s-OFDM 16 QAM	1@1	21.33	15.79	0.0379
5	15	5	176300	836.5	DFT-s-OFDM 16 QAM	1@23	21.31	15.77	0.0378
5	15	5	176300	836.5	DFT-s-OFDM 64 QAM	12@6	19.95	14.41	0.0276
5	15	5	176300	836.5	DFT-s-OFDM 64 QAM	1@1	20.22	14.68	0.0294
5	15	5	176300	836.5	DFT-s-OFDM 64 QAM	1@23	20.24	14.7	0.0295
5	15	5	176300	836.5	DFT-s-OFDM 256 QAM	12@6	17.91	12.37	0.0173
5	15	5	176300	836.5	DFT-s-OFDM 256 QAM	1@1	18.3	12.76	0.0189
5	15	5	176300	836.5	DFT-s-OFDM 256 QAM	1@23	18.2	12.66	0.0185
5	15	5	176300	836.5	CP-OFDM QPSK	13@6	20.98	15.44	0.035
5	15	5	176300	836.5	CP-OFDM QPSK	1@1	21.19	15.65	0.0367
5	15	5	176300	836.5	CP-OFDM QPSK	1@23	21.15	15.61	0.0364
5	15	5	178300	846.5	DFT-s-OFDM PI/2 BPSK	12@6	22.58	17.04	0.0506
5	15	5	178300	846.5	DFT-s-OFDM PI/2 BPSK	1@1	22.47	16.93	0.0493
5	15	5	178300	846.5	DFT-s-OFDM PI/2 BPSK	1@23	22.45	16.91	0.0491
5	15	5	178300	846.5	DFT-s-OFDM QPSK	12@6	22.55	17.01	0.0502
5	15	5	178300	846.5	DFT-s-OFDM QPSK	1@1	22.52	16.98	0.0499
5	15	5	178300	846.5	DFT-s-OFDM QPSK	1@23	22.55	17.01	0.0502

5	15	5	178300	846.5	DFT-s-OFDM 16 QAM	12@6	21.59	16.05	0.0403
5	15	5	178300	846.5	DFT-s-OFDM 16 QAM	1@1	21.34	15.8	0.038
5	15	5	178300	846.5	DFT-s-OFDM 16 QAM	1@23	21.43	15.89	0.0388
5	15	5	178300	846.5	DFT-s-OFDM 64 QAM	12@6	19.96	14.42	0.0277
5	15	5	178300	846.5	DFT-s-OFDM 64 QAM	1@1	20.31	14.77	0.03
5	15	5	178300	846.5	DFT-s-OFDM 64 QAM	1@23	20.33	14.79	0.0301
5	15	5	178300	846.5	DFT-s-OFDM 256 QAM	12@6	17.91	12.37	0.0173
5	15	5	178300	846.5	DFT-s-OFDM 256 QAM	1@1	18.21	12.67	0.0185
5	15	5	178300	846.5	DFT-s-OFDM 256 QAM	1@23	18.26	12.72	0.0187
5	15	5	178300	846.5	CP-OFDM QPSK	13@6	21.0	15.46	0.0352
5	15	5	178300	846.5	CP-OFDM QPSK	1@1	21.2	15.66	0.0368
5	15	5	178300	846.5	CP-OFDM QPSK	1@23	21.37	15.83	0.0383
5	15	10	174800	829.0	DFT-s-OFDM PI/2 BPSK	25@12	21.99	16.45	0.0442
5	15	10	174800	829.0	DFT-s-OFDM PI/2 BPSK	1@1	22.43	16.89	0.0489
5	15	10	174800	829.0	DFT-s-OFDM PI/2 BPSK	1@50	22.37	16.83	0.0482
5	15	10	174800	829.0	DFT-s-OFDM QPSK	25@12	22.54	17.0	0.0501
5	15	10	174800	829.0	DFT-s-OFDM QPSK	1@1	22.48	16.94	0.0494
5	15	10	174800	829.0	DFT-s-OFDM QPSK	1@50	22.41	16.87	0.0486
5	15	10	174800	829.0	DFT-s-OFDM 16 QAM	25@12	21.61	16.07	0.0405
5	15	10	174800	829.0	DFT-s-OFDM 16 QAM	1@1	21.34	15.8	0.038
5	15	10	174800	829.0	DFT-s-OFDM 16 QAM	1@50	21.25	15.71	0.0372
5	15	10	174800	829.0	DFT-s-OFDM 64 QAM	25@12	20.02	14.48	0.0281
5	15	10	174800	829.0	DFT-s-OFDM 64 QAM	1@1	20.19	14.65	0.0292
5	15	10	174800	829.0	DFT-s-OFDM 64 QAM	1@50	20.22	14.68	0.0294

5	15	10	174800	829.0	DFT-s-OFDM 256 QAM	25@12	17.89	12.35	0.0172
5	15	10	174800	829.0	DFT-s-OFDM 256 QAM	1@1	18.13	12.59	0.0182
5	15	10	174800	829.0	DFT-s-OFDM 256 QAM	1@50	18.05	12.51	0.0178
5	15	10	174800	829.0	CP-OFDM QPSK	26@13	20.95	15.41	0.0348
5	15	10	174800	829.0	CP-OFDM QPSK	1@1	21.27	15.73	0.0374
5	15	10	174800	829.0	CP-OFDM QPSK	1@50	21.13	15.59	0.0362
5	15	10	176300	836.5	DFT-s-OFDM PI/2 BPSK	25@12	22.41	16.87	0.0486
5	15	10	176300	836.5	DFT-s-OFDM PI/2 BPSK	1@1	22.37	16.83	0.0482
5	15	10	176300	836.5	DFT-s-OFDM PI/2 BPSK	1@50	22.31	16.77	0.0475
5	15	10	176300	836.5	DFT-s-OFDM QPSK	25@12	22.44	16.9	0.049
5	15	10	176300	836.5	DFT-s-OFDM QPSK	1@1	22.39	16.85	0.0484
5	15	10	176300	836.5	DFT-s-OFDM QPSK	1@50	22.39	16.85	0.0484
5	15	10	176300	836.5	DFT-s-OFDM 16 QAM	25@12	21.5	15.96	0.0394
5	15	10	176300	836.5	DFT-s-OFDM 16 QAM	1@1	21.21	15.67	0.0369
5	15	10	176300	836.5	DFT-s-OFDM 16 QAM	1@50	21.21	15.67	0.0369
5	15	10	176300	836.5	DFT-s-OFDM 64 QAM	25@12	19.84	14.3	0.0269
5	15	10	176300	836.5	DFT-s-OFDM 64 QAM	1@1	20.19	14.65	0.0292
5	15	10	176300	836.5	DFT-s-OFDM 64 QAM	1@50	20.18	14.64	0.0291
5	15	10	176300	836.5	DFT-s-OFDM 256 QAM	25@12	17.83	12.29	0.0169
5	15	10	176300	836.5	DFT-s-OFDM 256 QAM	1@1	18.12	12.58	0.0181
5	15	10	176300	836.5	DFT-s-OFDM 256 QAM	1@50	18.04	12.5	0.0178
5	15	10	176300	836.5	CP-OFDM QPSK	26@13	20.84	15.3	0.0339
5	15	10	176300	836.5	CP-OFDM QPSK	1@1	21.08	15.54	0.0358
5	15	10	176300	836.5	CP-OFDM QPSK	1@50	21.1	15.56	0.036

5	15	10	177800	844.0	DFT-s-OFDM PI/2 BPSK	25@12	22.43	16.89	0.0489
5	15	10	177800	844.0	DFT-s-OFDM PI/2 BPSK	1@1	22.33	16.79	0.0478
5	15	10	177800	844.0	DFT-s-OFDM PI/2 BPSK	1@50	22.37	16.83	0.0482
5	15	10	177800	844.0	DFT-s-OFDM QPSK	25@12	22.39	16.85	0.0484
5	15	10	177800	844.0	DFT-s-OFDM QPSK	1@1	22.33	16.79	0.0478
5	15	10	177800	844.0	DFT-s-OFDM QPSK	1@50	22.39	16.85	0.0484
5	15	10	177800	844.0	DFT-s-OFDM 16 QAM	25@12	21.53	15.99	0.0397
5	15	10	177800	844.0	DFT-s-OFDM 16 QAM	1@1	21.64	16.1	0.0407
5	15	10	177800	844.0	DFT-s-OFDM 16 QAM	1@50	21.31	15.77	0.0378
5	15	10	177800	844.0	DFT-s-OFDM 64 QAM	25@12	19.86	14.32	0.027
5	15	10	177800	844.0	DFT-s-OFDM 64 QAM	1@1	20.1	14.56	0.0286
5	15	10	177800	844.0	DFT-s-OFDM 64 QAM	1@50	20.22	14.68	0.0294
5	15	10	177800	844.0	DFT-s-OFDM 256 QAM	25@12	17.86	12.32	0.0171
5	15	10	177800	844.0	DFT-s-OFDM 256 QAM	1@1	17.98	12.44	0.0175
5	15	10	177800	844.0	DFT-s-OFDM 256 QAM	1@50	18.09	12.55	0.018
5	15	10	177800	844.0	CP-OFDM QPSK	26@13	20.87	15.33	0.0341
5	15	10	177800	844.0	CP-OFDM QPSK	1@1	20.97	15.43	0.0349
5	15	10	177800	844.0	CP-OFDM QPSK	1@50	21.31	15.77	0.0378
5	15	15	175300	831.5	DFT-s-OFDM PI/2 BPSK	36@18	22.09	16.55	0.0452
5	15	15	175300	831.5	DFT-s-OFDM PI/2 BPSK	1@1	22.52	16.98	0.0499
5	15	15	175300	831.5	DFT-s-OFDM PI/2 BPSK	1@77	22.42	16.88	0.0488
5	15	15	175300	831.5	DFT-s-OFDM QPSK	36@18	22.6	17.06	0.0508
5	15	15	175300	831.5	DFT-s-OFDM QPSK	1@1	22.55	17.01	0.0502
5	15	15	175300	831.5	DFT-s-OFDM QPSK	1@77	22.44	16.9	0.049

5	15	15	175300	831.5	DFT-s-OFDM 16 QAM	36@18	21.62	16.08	0.0406
5	15	15	175300	831.5	DFT-s-OFDM 16 QAM	1@1	21.36	15.82	0.0382
5	15	15	175300	831.5	DFT-s-OFDM 16 QAM	1@77	21.44	15.9	0.0389
5	15	15	175300	831.5	DFT-s-OFDM 64 QAM	36@18	20.04	14.5	0.0282
5	15	15	175300	831.5	DFT-s-OFDM 64 QAM	1@1	20.29	14.75	0.0299
5	15	15	175300	831.5	DFT-s-OFDM 64 QAM	1@77	20.15	14.61	0.0289
5	15	15	175300	831.5	DFT-s-OFDM 256 QAM	36@18	18.1	12.56	0.018
5	15	15	175300	831.5	DFT-s-OFDM 256 QAM	1@1	18.25	12.71	0.0187
5	15	15	175300	831.5	DFT-s-OFDM 256 QAM	1@77	18.11	12.57	0.0181
5	15	15	175300	831.5	CP-OFDM QPSK	39@191	19.62	14.08	0.0256
5	15	15	175300	831.5	CP-OFDM QPSK	1@1	21.4	15.86	0.0385
5	15	15	175300	831.5	CP-OFDM QPSK	1@77	21.14	15.6	0.0363
5	15	15	176300	836.5	DFT-s-OFDM PI/2 BPSK	36@18	22.52	16.98	0.0499
5	15	15	176300	836.5	DFT-s-OFDM PI/2 BPSK	1@1	22.51	16.97	0.0498
5	15	15	176300	836.5	DFT-s-OFDM PI/2 BPSK	1@77	22.37	16.83	0.0482
5	15	15	176300	836.5	DFT-s-OFDM QPSK	36@18	22.54	17.0	0.0501
5	15	15	176300	836.5	DFT-s-OFDM QPSK	1@1	22.55	17.01	0.0502
5	15	15	176300	836.5	DFT-s-OFDM QPSK	1@77	22.46	16.92	0.0492
5	15	15	176300	836.5	DFT-s-OFDM 16 QAM	36@18	21.6	16.06	0.0404
5	15	15	176300	836.5	DFT-s-OFDM 16 QAM	1@1	21.45	15.91	0.039
5	15	15	176300	836.5	DFT-s-OFDM 16 QAM	1@77	21.31	15.77	0.0378
5	15	15	176300	836.5	DFT-s-OFDM 64 QAM	36@18	20.03	14.49	0.0281
5	15	15	176300	836.5	DFT-s-OFDM 64 QAM	1@1	20.27	14.73	0.0297
5	15	15	176300	836.5	DFT-s-OFDM 64 QAM	1@77	20.25	14.71	0.0296

5	15	15	176300	836.5	DFT-s-OFDM 256 QAM	36@18	18.05	12.51	0.0178
5	15	15	176300	836.5	DFT-s-OFDM 256 QAM	1@1	18.22	12.68	0.0185
5	15	15	176300	836.5	DFT-s-OFDM 256 QAM	1@77	18.13	12.59	0.0182
5	15	15	176300	836.5	CP-OFDM QPSK	39@191	19.56	14.02	0.0252
5	15	15	176300	836.5	CP-OFDM QPSK	1@1	21.35	15.81	0.0381
5	15	15	176300	836.5	CP-OFDM QPSK	1@77	21.2	15.66	0.0368
5	15	15	177300	841.5	DFT-s-OFDM PI/2 BPSK	36@18	22.48	16.94	0.0494
5	15	15	177300	841.5	DFT-s-OFDM PI/2 BPSK	1@1	22.42	16.88	0.0488
5	15	15	177300	841.5	DFT-s-OFDM PI/2 BPSK	1@77	22.44	16.9	0.049
5	15	15	177300	841.5	DFT-s-OFDM QPSK	36@18	22.58	17.04	0.0506
5	15	15	177300	841.5	DFT-s-OFDM QPSK	1@1	22.54	17.0	0.0501
5	15	15	177300	841.5	DFT-s-OFDM QPSK	1@77	22.51	16.97	0.0498
5	15	15	177300	841.5	DFT-s-OFDM 16 QAM	36@18	21.55	16.01	0.0399
5	15	15	177300	841.5	DFT-s-OFDM 16 QAM	1@1	21.36	15.82	0.0382
5	15	15	177300	841.5	DFT-s-OFDM 16 QAM	1@77	21.37	15.83	0.0383
5	15	15	177300	841.5	DFT-s-OFDM 64 QAM	36@18	20.11	14.57	0.0286
5	15	15	177300	841.5	DFT-s-OFDM 64 QAM	1@1	20.01	14.47	0.028
5	15	15	177300	841.5	DFT-s-OFDM 64 QAM	1@77	20.33	14.79	0.0301
5	15	15	177300	841.5	DFT-s-OFDM 256 QAM	36@18	18.04	12.5	0.0178
5	15	15	177300	841.5	DFT-s-OFDM 256 QAM	1@1	18.13	12.59	0.0182
5	15	15	177300	841.5	DFT-s-OFDM 256 QAM	1@77	18.21	12.67	0.0185
5	15	15	177300	841.5	CP-OFDM QPSK	39@191	19.47	13.93	0.0247
5	15	15	177300	841.5	CP-OFDM QPSK	1@1	21.17	15.63	0.0366
5	15	15	177300	841.5	CP-OFDM QPSK	1@77	21.3	15.76	0.0377

5	15	20	175800	834.0	DFT-s-OFDM PI/2 BPSK	50@25	22.07	16.53	0.045
5	15	20	175800	834.0	DFT-s-OFDM PI/2 BPSK	1@1	22.5	16.96	0.0497
5	15	20	175800	834.0	DFT-s-OFDM PI/2 BPSK	1@104	22.44	16.9	0.049
5	15	20	175800	834.0	DFT-s-OFDM QPSK	50@25	22.62	17.08	0.0511
5	15	20	175800	834.0	DFT-s-OFDM QPSK	1@1	22.53	16.99	0.05
5	15	20	175800	834.0	DFT-s-OFDM QPSK	1@104	22.43	16.89	0.0489
5	15	20	175800	834.0	DFT-s-OFDM 16 QAM	50@25	21.56	16.02	0.04
5	15	20	175800	834.0	DFT-s-OFDM 16 QAM	1@1	21.43	15.89	0.0388
5	15	20	175800	834.0	DFT-s-OFDM 16 QAM	1@104	21.31	15.77	0.0378
5	15	20	175800	834.0	DFT-s-OFDM 64 QAM	50@25	20.03	14.49	0.0281
5	15	20	175800	834.0	DFT-s-OFDM 64 QAM	1@1	20.29	14.75	0.0299
5	15	20	175800	834.0	DFT-s-OFDM 64 QAM	1@104	20.23	14.69	0.0294
5	15	20	175800	834.0	DFT-s-OFDM 256 QAM	50@25	17.95	12.41	0.0174
5	15	20	175800	834.0	DFT-s-OFDM 256 QAM	1@1	18.23	12.69	0.0186
5	15	20	175800	834.0	DFT-s-OFDM 256 QAM	1@104	18.15	12.61	0.0182
5	15	20	175800	834.0	CP-OFDM QPSK	53@26	21.03	15.49	0.0354
5	15	20	175800	834.0	CP-OFDM QPSK	1@1	21.41	15.87	0.0386
5	15	20	175800	834.0	CP-OFDM QPSK	1@104	21.19	15.65	0.0367
5	15	20	176300	836.5	DFT-s-OFDM PI/2 BPSK	50@25	22.54	17.0	0.0501
5	15	20	176300	836.5	DFT-s-OFDM PI/2 BPSK	1@1	22.51	16.97	0.0498
5	15	20	176300	836.5	DFT-s-OFDM PI/2 BPSK	1@104	22.41	16.87	0.0486
5	15	20	176300	836.5	DFT-s-OFDM QPSK	50@25	22.58	17.04	0.0506
5	15	20	176300	836.5	DFT-s-OFDM QPSK	1@1	22.62	17.08	0.0511
5	15	20	176300	836.5	DFT-s-OFDM QPSK	1@104	22.48	16.94	0.0494

5	15	20	176300	836.5	DFT-s-OFDM 16 QAM	50@25	21.59	16.05	0.0403
5	15	20	176300	836.5	DFT-s-OFDM 16 QAM	1@1	21.49	15.95	0.0394
5	15	20	176300	836.5	DFT-s-OFDM 16 QAM	1@104	21.35	15.81	0.0381
5	15	20	176300	836.5	DFT-s-OFDM 64 QAM	50@25	20.08	14.54	0.0284
5	15	20	176300	836.5	DFT-s-OFDM 64 QAM	1@1	20.41	14.87	0.0307
5	15	20	176300	836.5	DFT-s-OFDM 64 QAM	1@104	20.22	14.68	0.0294
5	15	20	176300	836.5	DFT-s-OFDM 256 QAM	50@25	17.98	12.44	0.0175
5	15	20	176300	836.5	DFT-s-OFDM 256 QAM	1@1	18.3	12.76	0.0189
5	15	20	176300	836.5	DFT-s-OFDM 256 QAM	1@104	18.16	12.62	0.0183
5	15	20	176300	836.5	CP-OFDM QPSK	53@26	21.01	15.47	0.0352
5	15	20	176300	836.5	CP-OFDM QPSK	1@1	21.34	15.8	0.038
5	15	20	176300	836.5	CP-OFDM QPSK	1@104	21.28	15.74	0.0375
5	15	20	176800	839.0	DFT-s-OFDM PI/2 BPSK	50@25	22.61	17.07	0.0509
5	15	20	176800	839.0	DFT-s-OFDM PI/2 BPSK	1@1	22.45	16.91	0.0491
5	15	20	176800	839.0	DFT-s-OFDM PI/2 BPSK	1@104	22.46	16.92	0.0492
5	15	20	176800	839.0	DFT-s-OFDM QPSK	50@25	22.6	17.06	0.0508
5	15	20	176800	839.0	DFT-s-OFDM QPSK	1@1	22.53	16.99	0.05
5	15	20	176800	839.0	DFT-s-OFDM QPSK	1@104	22.52	16.98	0.0499
5	15	20	176800	839.0	DFT-s-OFDM 16 QAM	50@25	21.58	16.04	0.0402
5	15	20	176800	839.0	DFT-s-OFDM 16 QAM	1@1	21.87	16.33	0.043
5	15	20	176800	839.0	DFT-s-OFDM 16 QAM	1@104	21.38	15.84	0.0384
5	15	20	176800	839.0	DFT-s-OFDM 64 QAM	50@25	20.03	14.49	0.0281
5	15	20	176800	839.0	DFT-s-OFDM 64 QAM	1@1	20.27	14.73	0.0297
5	15	20	176800	839.0	DFT-s-OFDM 64 QAM	1@104	20.3	14.76	0.0299

5	15	20	176800	839.0	DFT-s- OFDM 256 QAM	50@25	18.0	12.46	0.0176
5	15	20	176800	839.0	DFT-s- OFDM 256 QAM	1@1	18.19	12.65	0.0184
5	15	20	176800	839.0	DFT-s- OFDM 256 QAM	1@104	18.17	12.63	0.0183
5	15	20	176800	839.0	CP-OFDM QPSK	53@26	21.05	15.51	0.0356
5	15	20	176800	839.0	CP-OFDM QPSK	1@1	21.33	15.79	0.0379
5	15	20	176800	839.0	CP-OFDM QPSK	1@104	21.34	15.8	0.038

Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
5	15	20	176300	836.5	DFT-s-OFDM QPSK	100@0	-0.00873	PASS	NV
5	15	20	176300	836.5	DFT-s-OFDM QPSK	100@0	-0.00274	PASS	LV
5	15	20	176300	836.5	DFT-s-OFDM QPSK	100@0	-0.00608	PASS	HV
5	15	20	176300	836.5	DFT-s-OFDM QPSK	100@0	-0.00524	PASS	-30°C
5	15	20	176300	836.5	DFT-s-OFDM QPSK	100@0	-0.00501	PASS	-20°C
5	15	20	176300	836.5	DFT-s-OFDM QPSK	100@0	-0.00191	PASS	-10°C
5	15	20	176300	836.5	DFT-s-OFDM QPSK	100@0	-0.00238	PASS	0°C
5	15	20	176300	836.5	DFT-s-OFDM QPSK	100@0	-0.00632	PASS	10°C
5	15	20	176300	836.5	DFT-s-OFDM QPSK	100@0	-0.00346	PASS	20°C
5	15	20	176300	836.5	DFT-s-OFDM QPSK	100@0	-0.00572	PASS	30°C
5	15	20	176300	836.5	DFT-s-OFDM QPSK	100@0	-0.00477	PASS	40°C
5	15	20	176300	836.5	DFT-s-OFDM QPSK	100@0	-0.00664	PASS	50°C


Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
5	15	20	175800	834.0	DFT-s-OFDM PI/2 BPSK	100@0	4.22	13	PASS
5	15	20	175800	834.0	DFT-s-OFDM PI/2 BPSK	1@0	3.72	13	PASS
5	15	20	175800	834.0	DFT-s-OFDM PI/2 BPSK	1@105	3.97	13	PASS
5	15	20	175800	834.0	DFT-s-OFDM QPSK	100@0	5.48	13	PASS
5	15	20	175800	834.0	DFT-s-OFDM QPSK	1@0	5.08	13	PASS
5	15	20	175800	834.0	DFT-s-OFDM QPSK	1@105	5.2	13	PASS
5	15	20	176300	836.5	DFT-s-OFDM PI/2 BPSK	100@0	4.26	13	PASS
5	15	20	176300	836.5	DFT-s-OFDM PI/2 BPSK	1@0	3.9	13	PASS
5	15	20	176300	836.5	DFT-s-OFDM PI/2 BPSK	1@105	3.97	13	PASS
5	15	20	176300	836.5	DFT-s-OFDM QPSK	100@0	5.51	13	PASS
5	15	20	176300	836.5	DFT-s-OFDM QPSK	1@0	5.06	13	PASS
5	15	20	176300	836.5	DFT-s-OFDM QPSK	1@105	5.17	13	PASS
5	15	20	176800	839.0	DFT-s-OFDM PI/2 BPSK	100@0	4.37	13	PASS
5	15	20	176800	839.0	DFT-s-OFDM PI/2 BPSK	1@0	3.94	13	PASS
5	15	20	176800	839.0	DFT-s-OFDM PI/2 BPSK	1@105	3.84	13	PASS
5	15	20	176800	839.0	DFT-s-OFDM QPSK	100@0	5.53	13	PASS
5	15	20	176800	839.0	DFT-s-OFDM QPSK	1@0	5.16	13	PASS
5	15	20	176800	839.0	DFT-s-OFDM QPSK	1@105	4.94	13	PASS


B7_N5(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Low_CH




B7_N5(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Low_CH

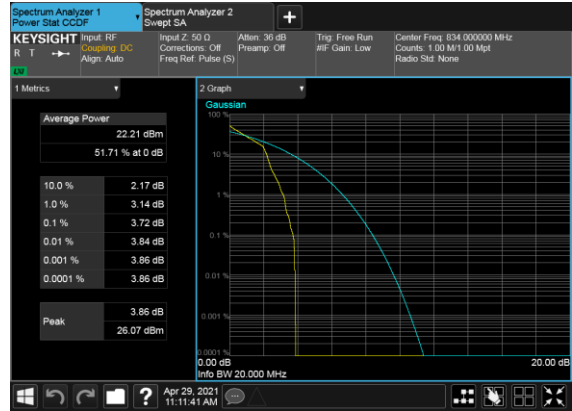


B7_N5(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Right_Low_CH

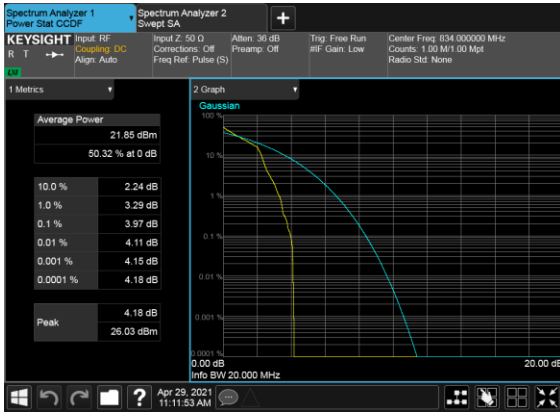


B7_N5(20M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH

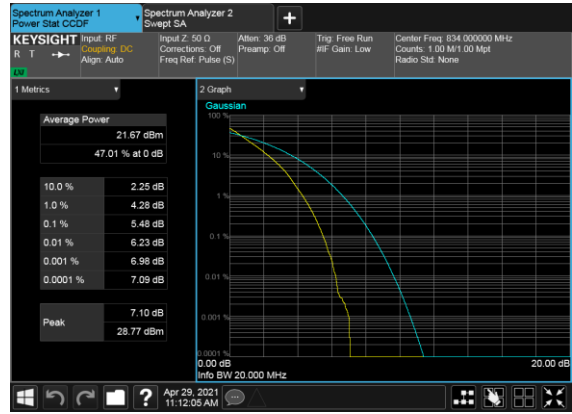

B7_N5(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

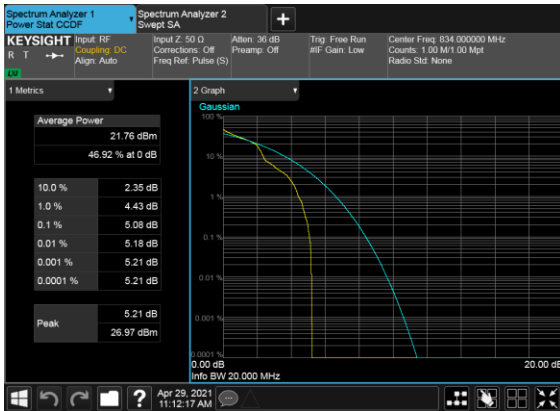


B7_N5(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_Low_CH

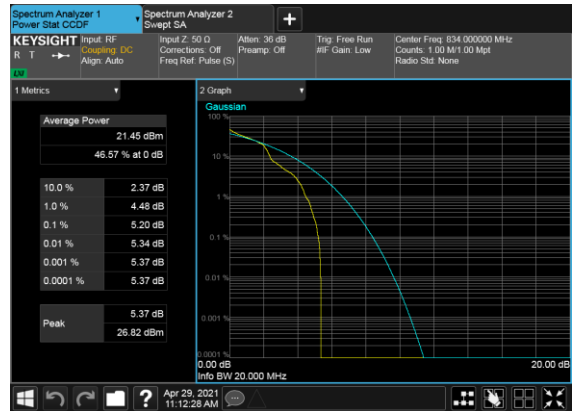


B7_N5(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH




B7_N5(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Mid_CH

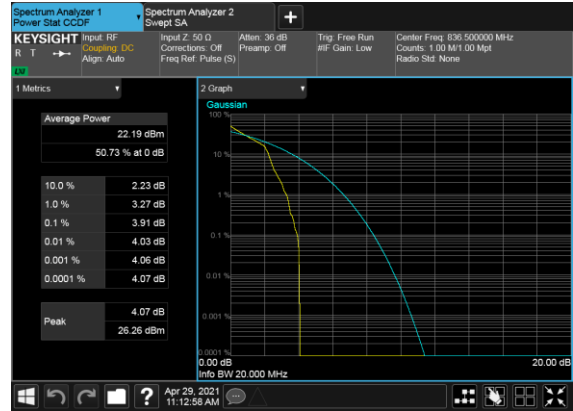


B7_N5(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Right_Mid_CH

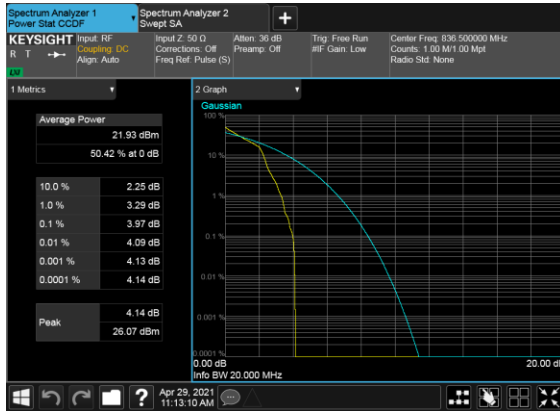


B7_N5(20M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

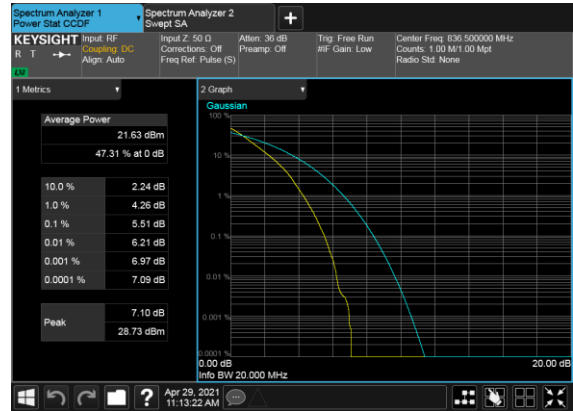

B7_N5(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

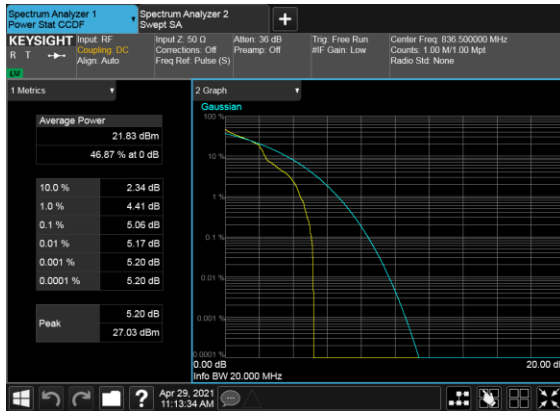

B7_N5(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_Mid_CH

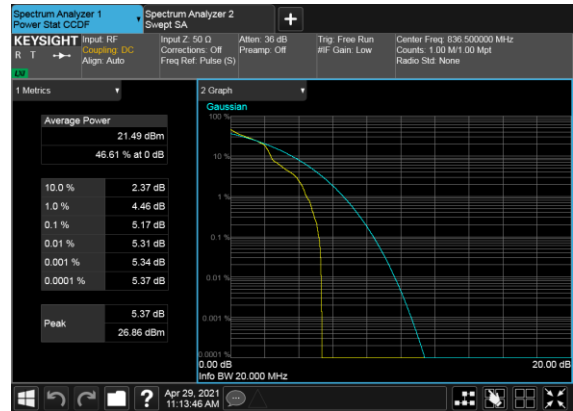


B7_N5(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_High_CH




B7_N5(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_High_CH



B7_N5(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Right_High_CH

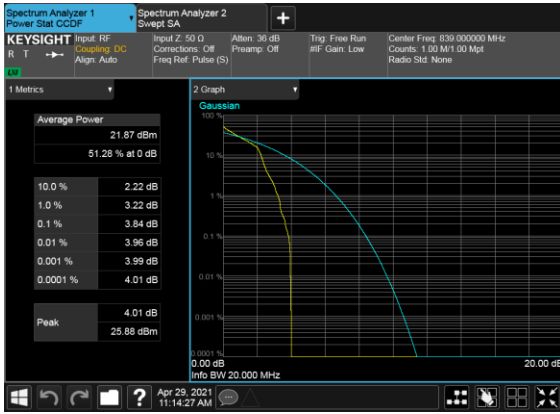


B7_N5(20M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH

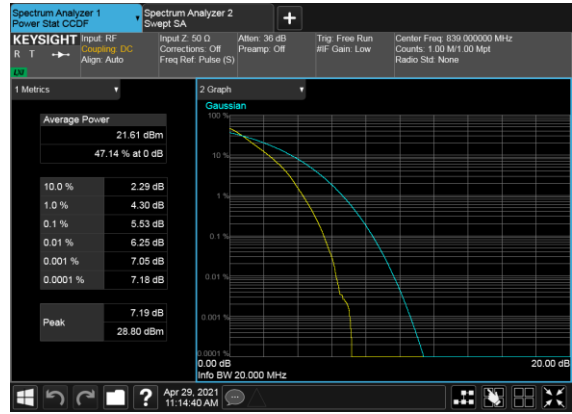

B7_N5(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH




B7_N5(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_High_CH

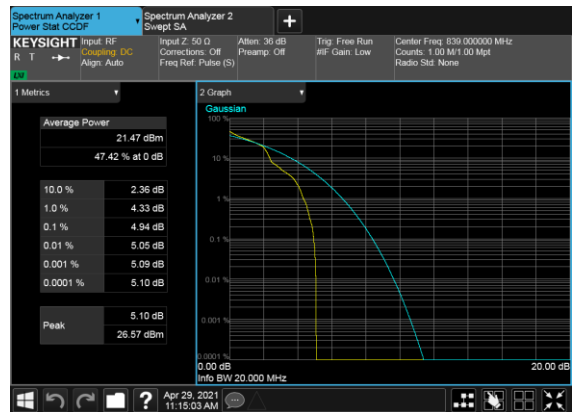


Occupied Bandwidth

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB OBW (MHz)
5	15	5	176300	836.5	DFT-s-OFDM PI/2 BPSK	25@0	4.57	5.02
5	15	5	176300	836.5	DFT-s-OFDM QPSK	25@0	4.57	5.05
5	15	5	176300	836.5	CP-OFDM QPSK	25@0	4.53	5.01
5	15	5	176300	836.5	CP-OFDM 16 QAM	25@0	4.54	5.06
5	15	5	176300	836.5	CP-OFDM 64 QAM	25@0	4.54	5.06
5	15	5	176300	836.5	CP-OFDM 256 QAM	25@0	4.54	5.03
5	15	10	176300	836.5	DFT-s-OFDM PI/2 BPSK	50@0	9.12	10.01
5	15	10	176300	836.5	DFT-s-OFDM QPSK	50@0	9.12	9.86
5	15	10	176300	836.5	CP-OFDM QPSK	52@0	9.43	10.21
5	15	10	176300	836.5	CP-OFDM 16 QAM	52@0	9.46	10.26
5	15	10	176300	836.5	CP-OFDM 64 QAM	52@0	9.43	10.42
5	15	10	176300	836.5	CP-OFDM 256 QAM	52@0	9.42	10.26
5	15	15	176300	836.5	DFT-s-OFDM PI/2 BPSK	75@0	13.7	14.86
5	15	15	176300	836.5	DFT-s-OFDM QPSK	75@0	13.68	18.55
5	15	15	176300	836.5	CP-OFDM QPSK	79@0	14.35	15.53
5	15	15	176300	836.5	CP-OFDM 16 QAM	79@0	14.37	15.54
5	15	15	176300	836.5	CP-OFDM 64 QAM	79@0	14.36	15.5
5	15	15	176300	836.5	CP-OFDM 256 QAM	79@0	14.32	15.52
5	15	20	176300	836.5	DFT-s-OFDM PI/2 BPSK	100@0	18.36	19.86
5	15	20	176300	836.5	DFT-s-OFDM QPSK	100@0	18.25	19.89
5	15	20	176300	836.5	CP-OFDM QPSK	106@0	19.22	20.8
5	15	20	176300	836.5	CP-OFDM 16 QAM	106@0	19.33	20.87
5	15	20	176300	836.5	CP-OFDM 64 QAM	106@0	19.26	20.92
5	15	20	176300	836.5	CP-OFDM 256 QAM	106@0	19.33	20.90

B7_N5(5M)_DFT-s-OFDM_PI_2- BPSK_Outer_Full_Mid_CH

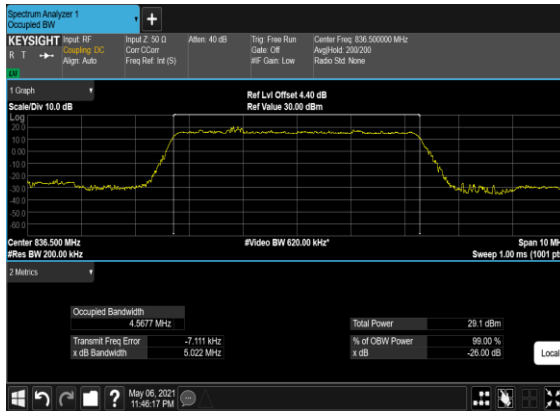


B7_N5(5M)_DFT-s- OFDM_QPSK_Outer_Full_Mid_CH

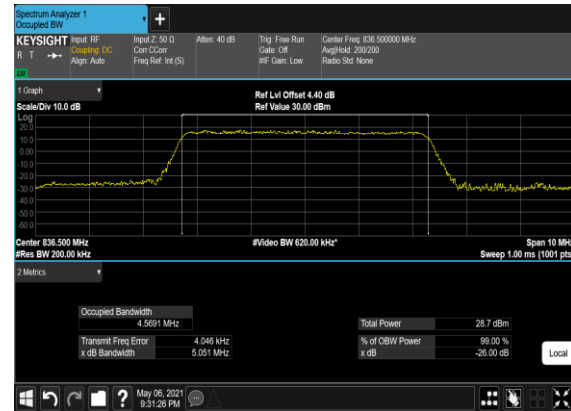


B7_N5(5M)_CP- OFDM_QPSK_Outer_Full_Mid_CH




B7_N5(5M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

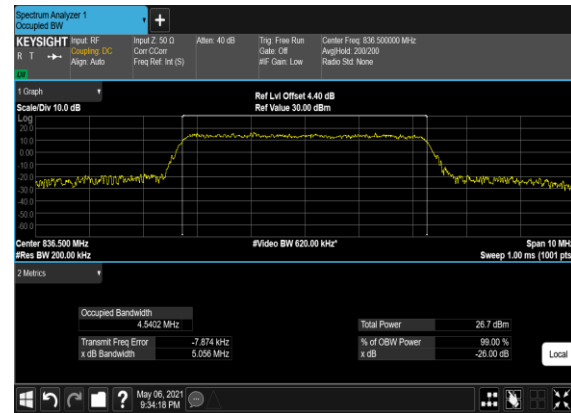


B7_N5(5M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

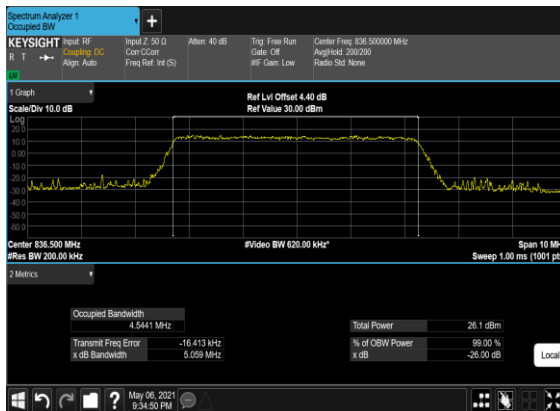


B7_N5(5M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

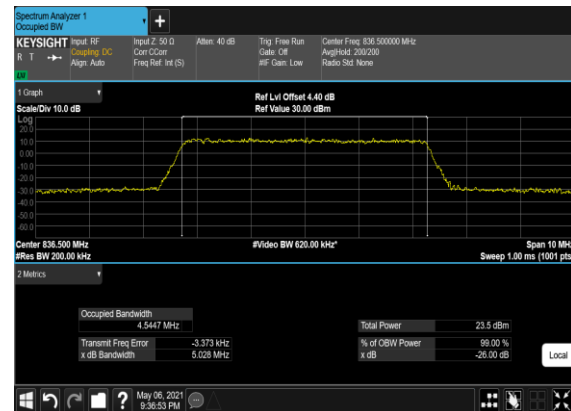


B7_N5(10M)_DFT-s-OFDM_PI_2- BPSK_Outer_Full_Mid_CH

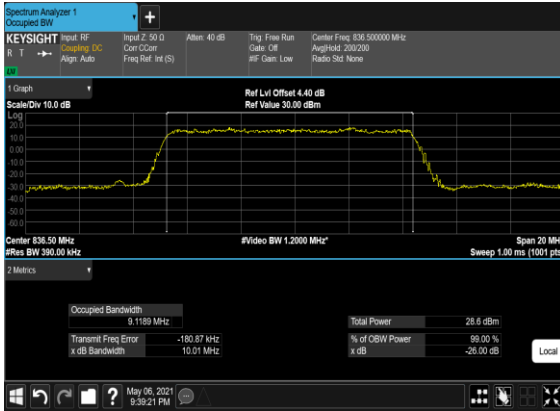

B7_N5(10M)_DFT-s- OFDM_QPSK_Outer_Full_Mid_CH

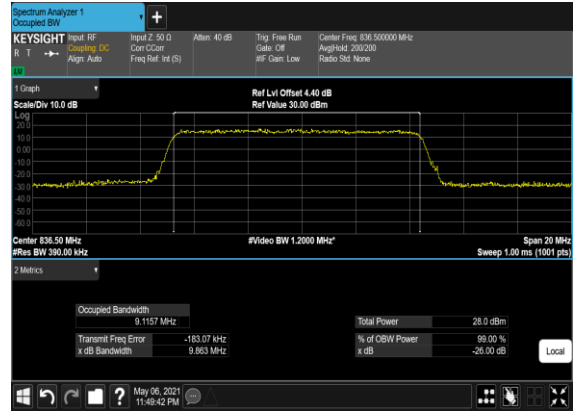


B7_N5(10M)_CP- OFDM_QPSK_Outer_Full_Mid_CH

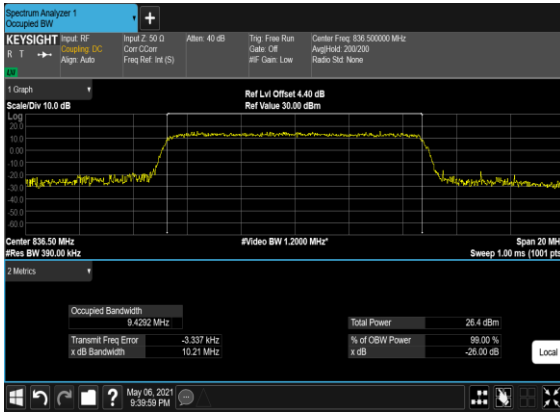


B7_N5(10M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH




B7_N5(10M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

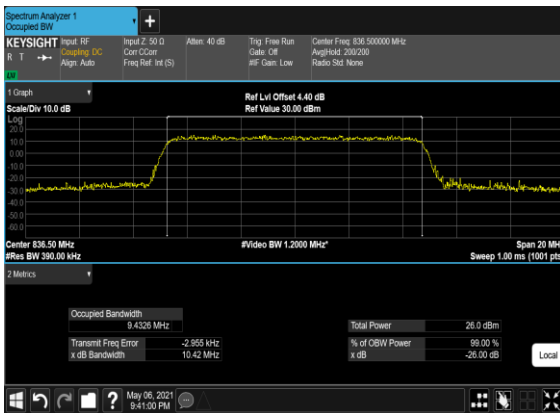


B7_N5(10M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

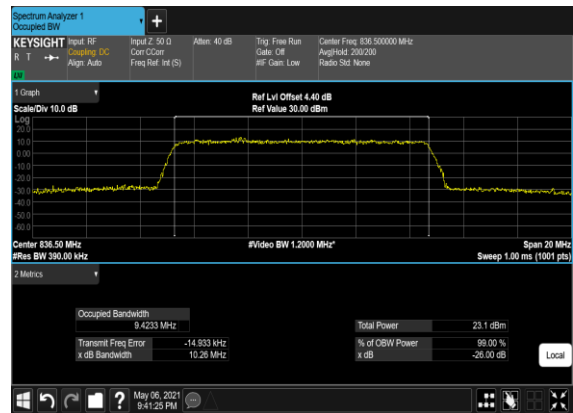

B7_N5(15M)_DFT-s-OFDM_PI_2- BPSK_Outer_Full_Mid_CH

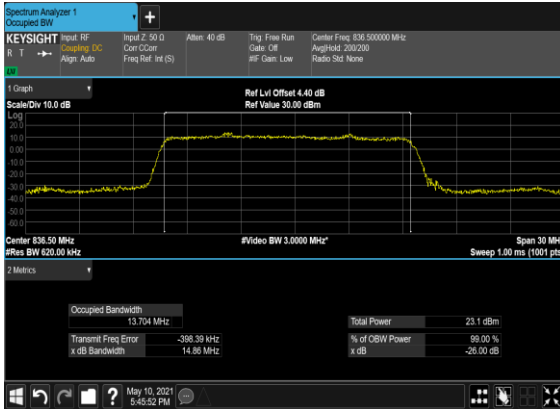


B7_N5(15M)_DFT-s- OFDM_QPSK_Outer_Full_Mid_CH

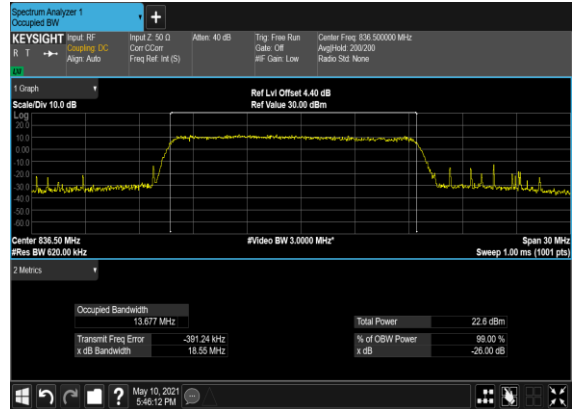


B7_N5(15M)_CP- OFDM_QPSK_Outer_Full_Mid_CH




B7_N5(15M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

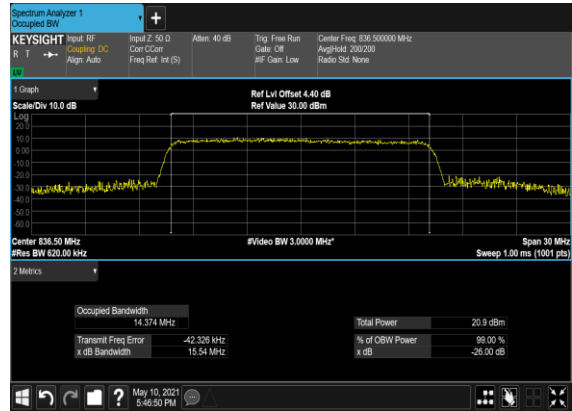


B7_N5(15M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

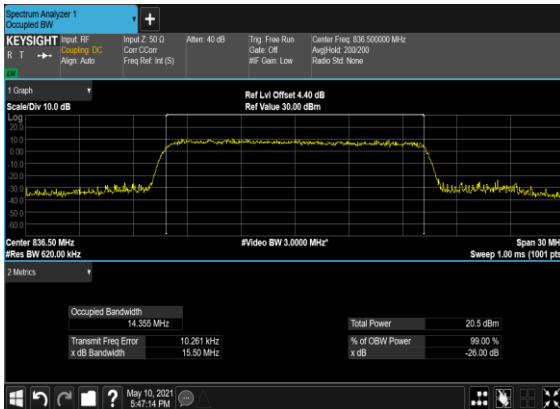

B7_N5(15M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

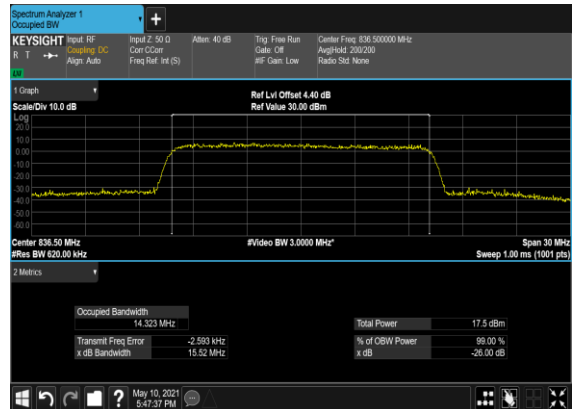


B7_N5(20M)_DFT-s-OFDM_PI_2- BPSK_Outer_Full_Mid_CH

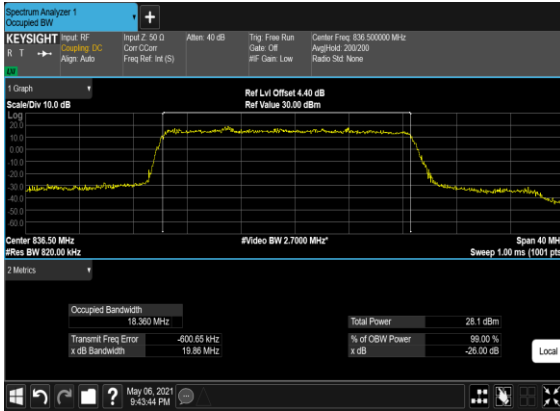


B7_N5(20M)_DFT-s- OFDM_QPSK_Outer_Full_Mid_CH




B7_N5(20M)_CP- OFDM_QPSK_Outer_Full_Mid_CH

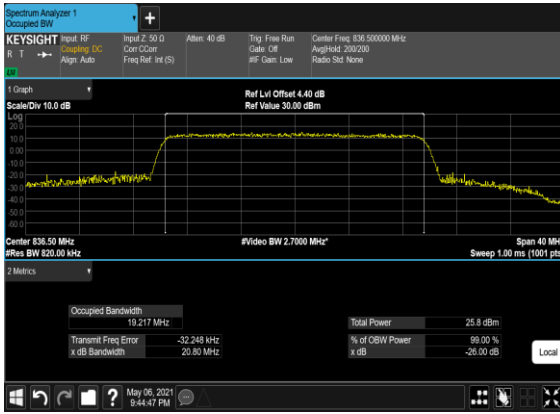


B7_N5(20M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

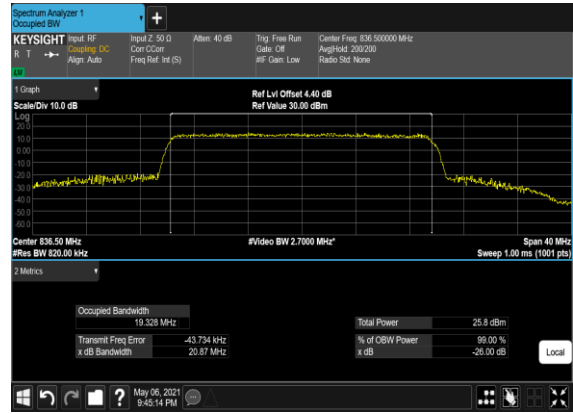

B7_N5(20M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

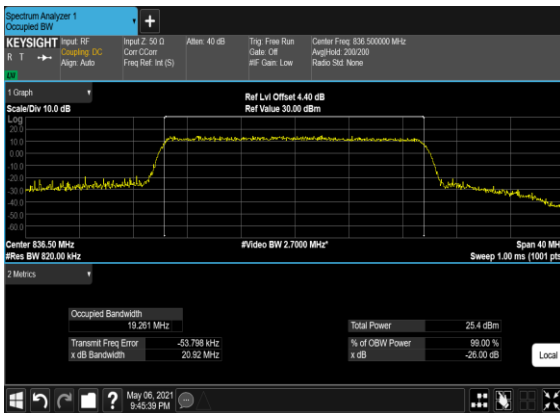

B7_N5(20M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

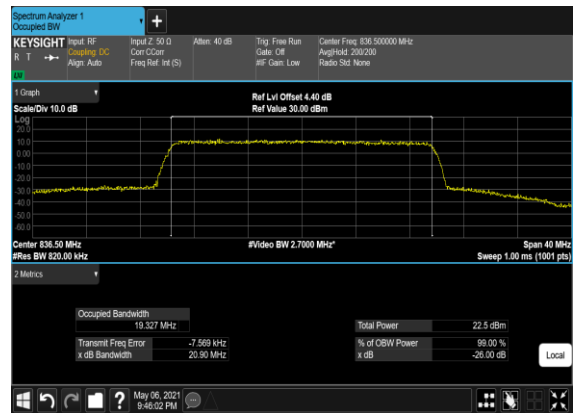


Conducted Band Edge

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
5	15	5	174300	826.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
5	15	5	174300	826.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
5	15	5	174300	826.5	DFT-s-OFDM BPSK	25@0	see graph	PASS
5	15	5	174300	826.5	DFT-s-OFDM QPSK	25@0	see graph	PASS
5	15	5	178300	846.5	DFT-s-OFDM BPSK	1@24	see graph	PASS
5	15	5	178300	846.5	DFT-s-OFDM QPSK	1@24	see graph	PASS
5	15	5	178300	846.5	DFT-s-OFDM BPSK	25@0	see graph	PASS
5	15	5	178300	846.5	DFT-s-OFDM QPSK	25@0	see graph	PASS
5	15	10	174800	829.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
5	15	10	174800	829.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
5	15	10	174800	829.0	DFT-s-OFDM BPSK	50@0	see graph	PASS
5	15	10	174800	829.0	DFT-s-OFDM QPSK	50@0	see graph	PASS
5	15	10	177800	844.0	DFT-s-OFDM BPSK	1@51	see graph	PASS
5	15	10	177800	844.0	DFT-s-OFDM QPSK	1@51	see graph	PASS
5	15	10	177800	844.0	DFT-s-OFDM BPSK	50@0	see graph	PASS
5	15	10	177800	844.0	DFT-s-OFDM QPSK	50@0	see graph	PASS
5	15	20	175800	834.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
5	15	20	175800	834.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
5	15	20	175800	834.0	DFT-s-OFDM BPSK	100@0	see graph	PASS
5	15	20	175800	834.0	DFT-s-OFDM QPSK	100@0	see graph	PASS
5	15	20	176800	839.0	DFT-s-OFDM BPSK	1@105	see graph	PASS
5	15	20	176800	839.0	DFT-s-OFDM QPSK	1@105	see graph	PASS

5	15	20	176800	839.0	DFT-s-OFDM BPSK	100@0	see graph	PASS
5	15	20	176800	839.0	DFT-s-OFDM QPSK	100@0	see graph	PASS


B7_N5(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

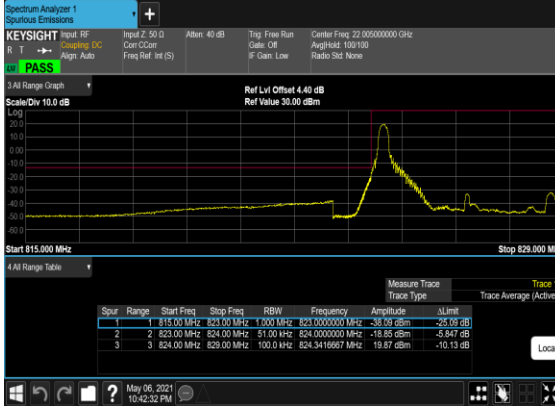


B7_N5(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH




B7_N5(5M)_DFT-s-
OFDM_BPSK_Outer_Full_Low_CH

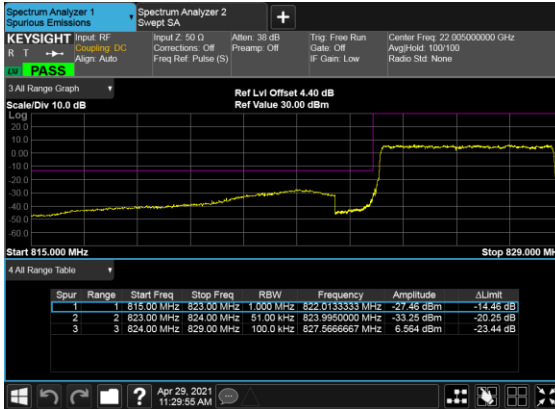


B7_N5(5M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH

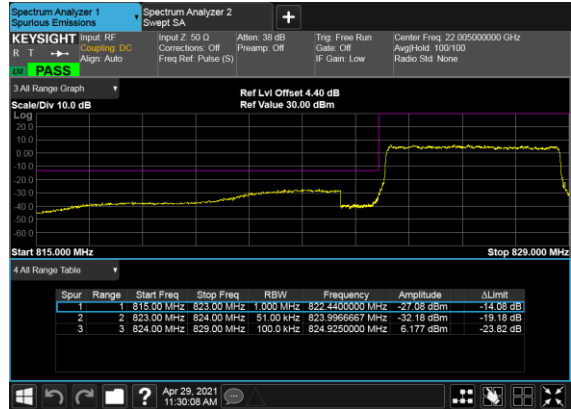


B7_N5(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_High_CH

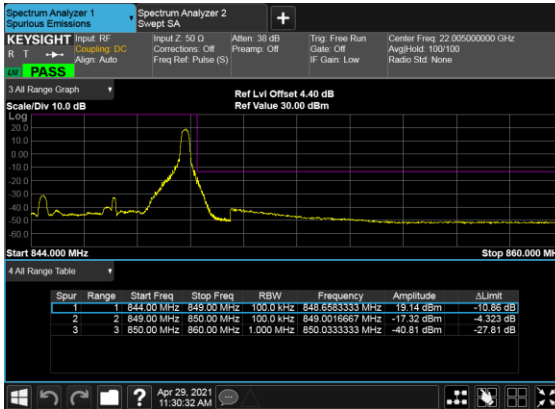


B7_N5(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_High_CH

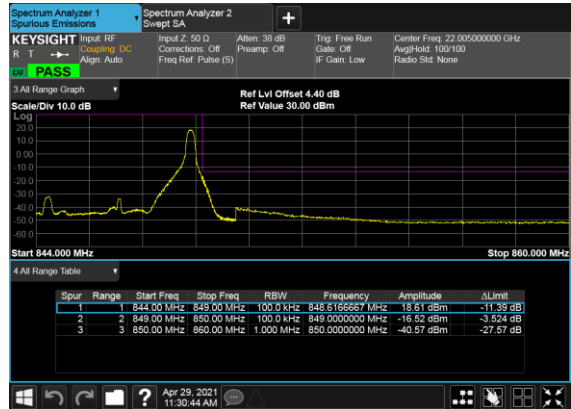


B7_N5(5M)_DFT-s-OFDM_BPSK_Outer_Full_High_CH

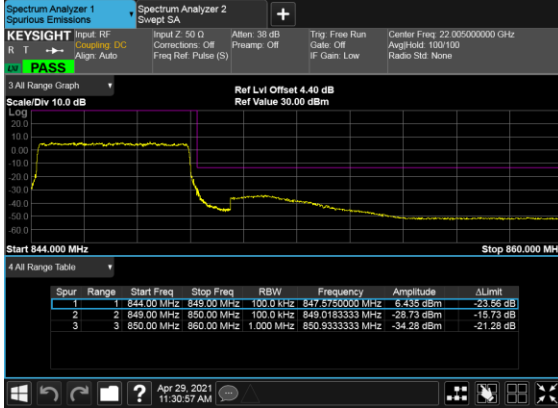


B7_N5(5M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH

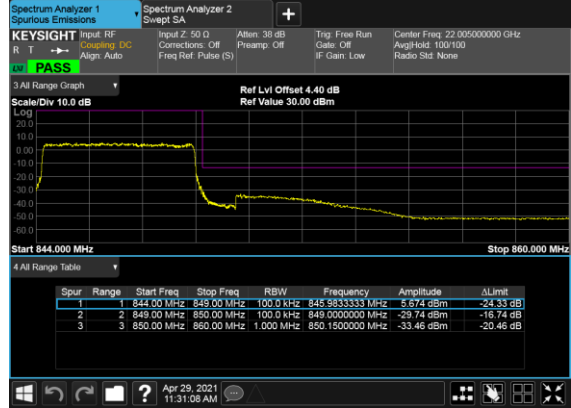


B7_N5(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

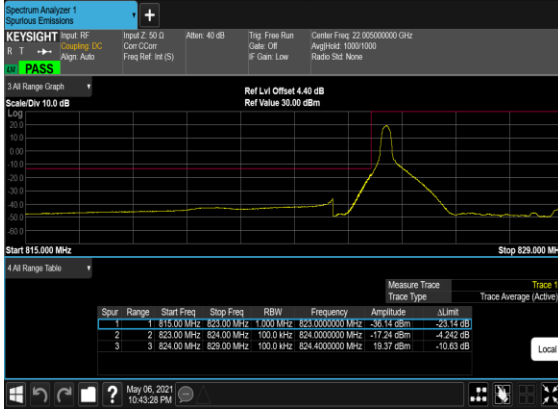


B7_N5(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

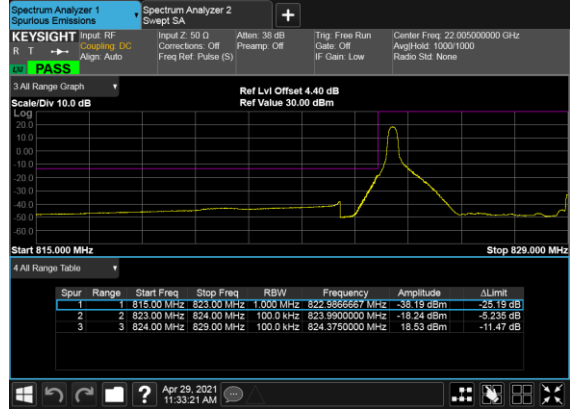


B7_N5(10M)_DFT-s-OFDM_BPSK_Outer_Full_Low_CH

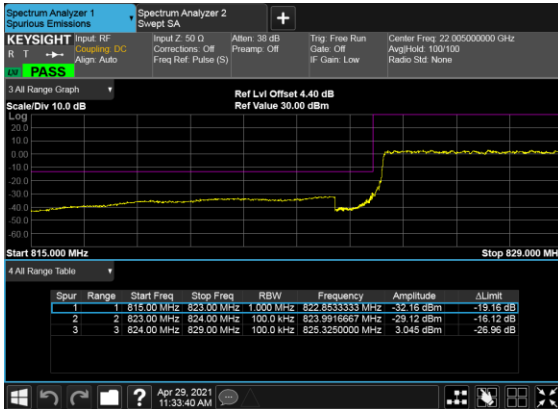


B7_N5(10M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH

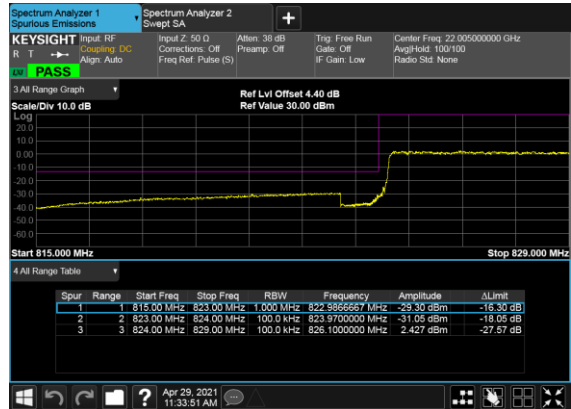


B7_N5(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_High_CH

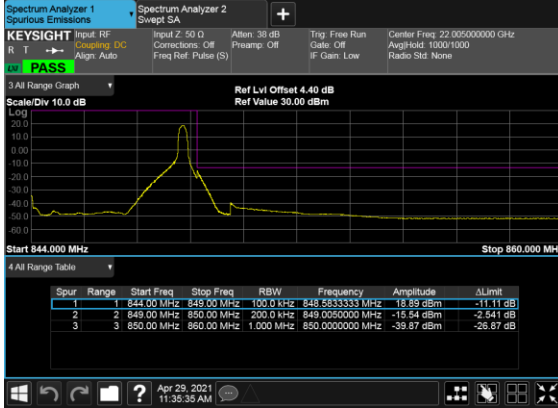


B7_N5(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_High_CH_CHP_P
ASS

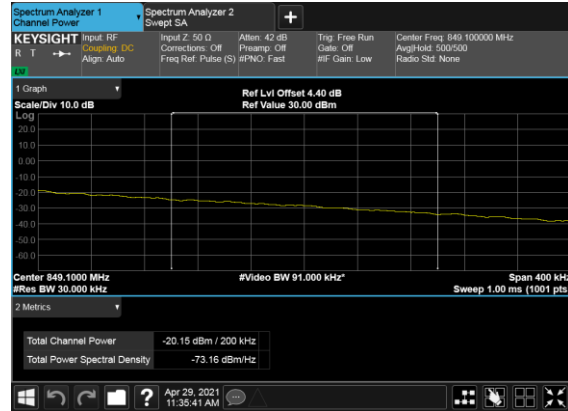


B7_N5(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_High_CH

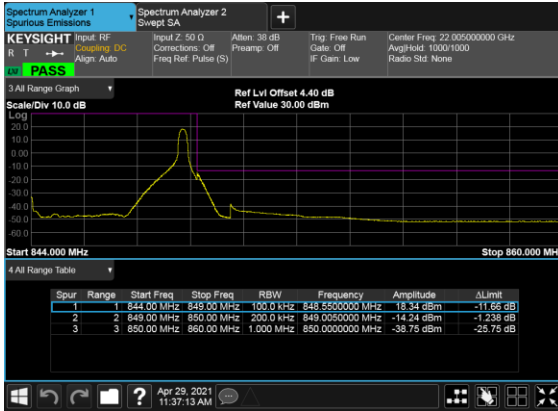


B7_N5(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_High_CH_CHP_P
ASS

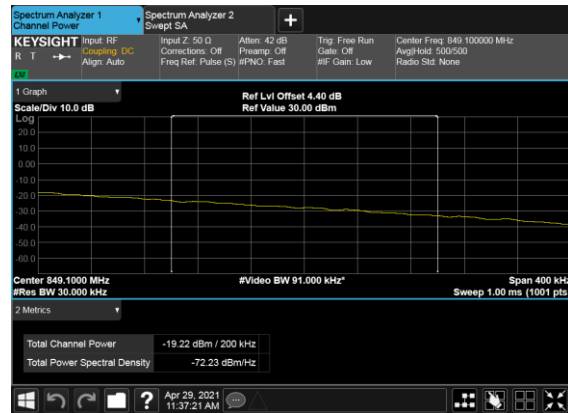


B7_N5(10M)_DFT-s-
OFDM_BPSK_Outer_Full_High_CH

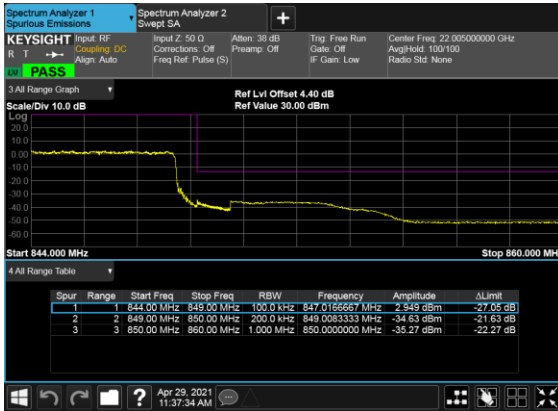


B7_N5(10M)_DFT-s-
OFDM_QPSK_Outer_Full_High_CH

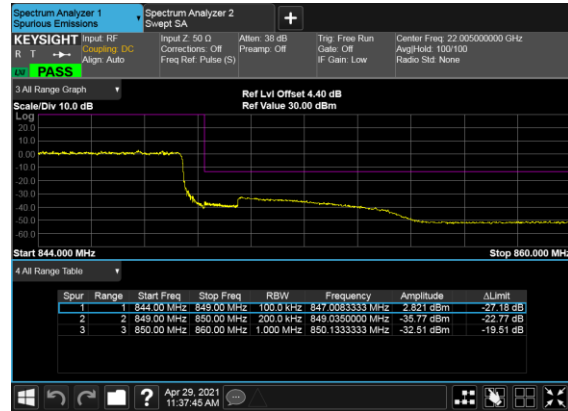


B7_N5(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

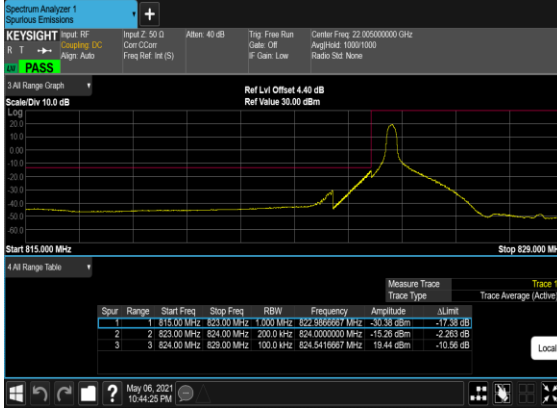


B7_N5(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH_CHP_PAS

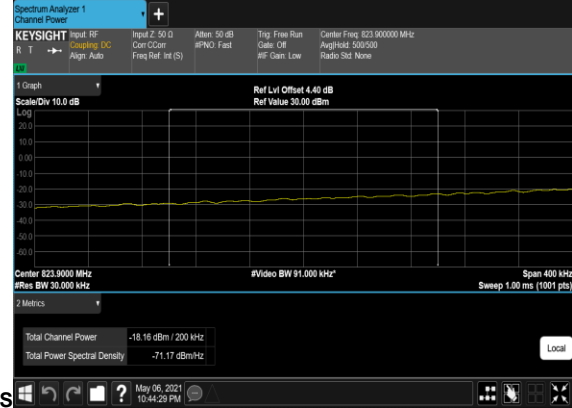


B7_N5(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

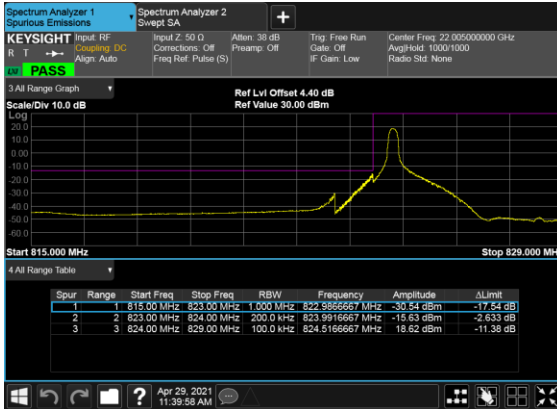


B7_N5(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH_CHP_PAS

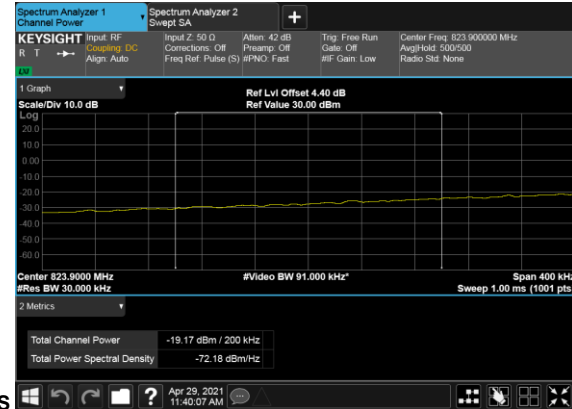


B7_N5(20M)_DFT-s-
OFDM_BPSK_Outer_Full_Low_CH

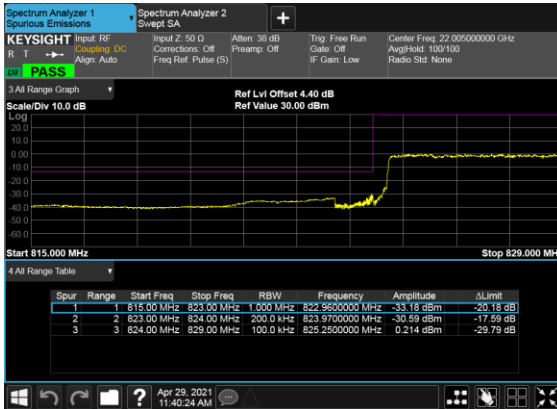


B7_N5(20M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH

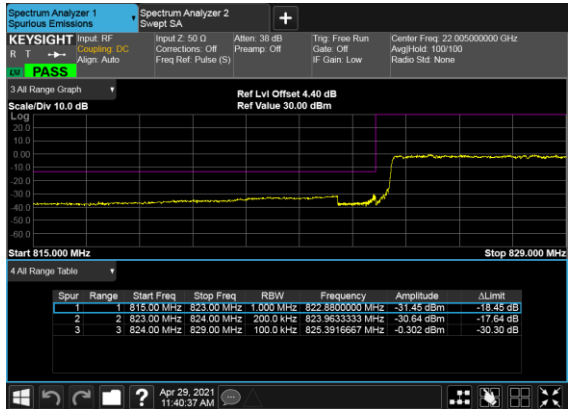


B7_N5(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_High_CH

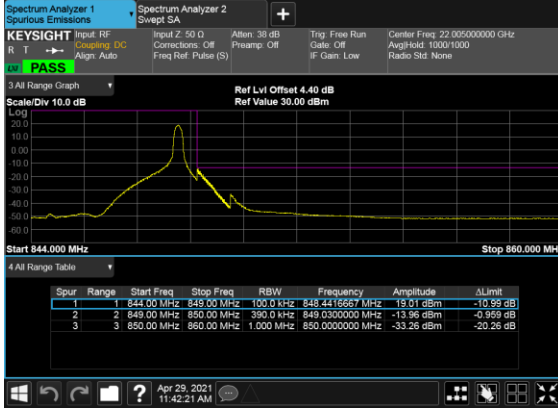


B7_N5(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_High_CH_CHP_P
ASS

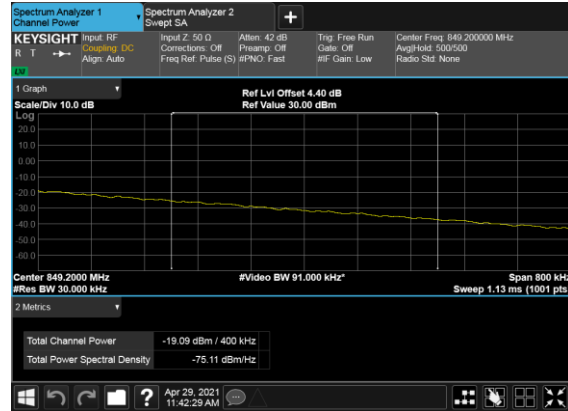


B7_N5(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_High_CH

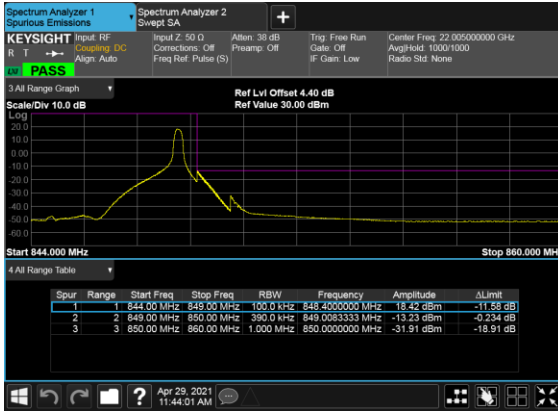


B7_N5(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_High_CH_CHP_P
ASS

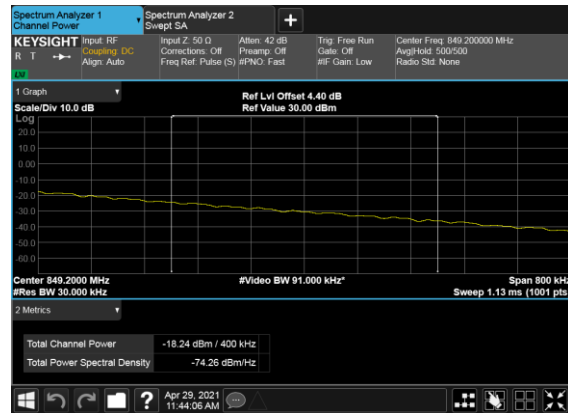

B7_N5(20M)_DFT-s-
OFDM_BPSK_Outer_Full_High_CH

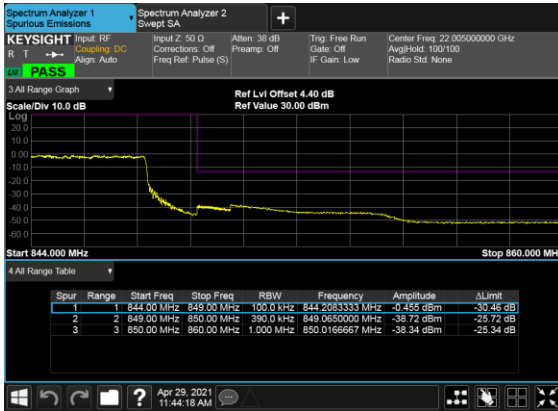

B7_N5(20M)_DFT-s-
OFDM_QPSK_Outer_Full_High_CH

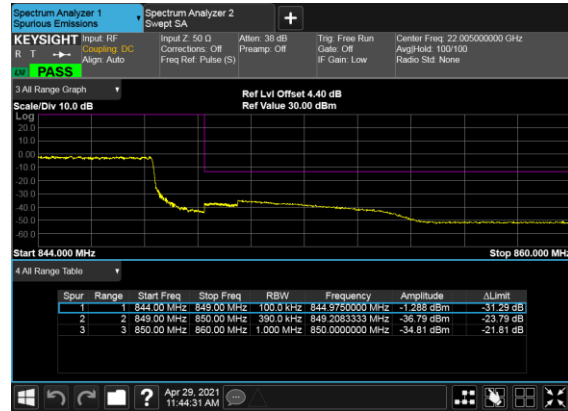


Conducted Spurious Emissions


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
5	15	5	174300	826.5	DFT-s-OFDM BPSK	1@0	see graph	---
5	15	5	174300	826.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
5	15	5	174300	826.5	DFT-s-OFDM QPSK	1@0	see graph	---
5	15	5	174300	826.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
5	15	5	176300	836.5	DFT-s-OFDM BPSK	1@0	see graph	---
5	15	5	176300	836.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
5	15	5	176300	836.5	DFT-s-OFDM QPSK	1@0	see graph	---
5	15	5	176300	836.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
5	15	5	178300	846.5	DFT-s-OFDM BPSK	1@0	see graph	---
5	15	5	178300	846.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
5	15	5	178300	846.5	DFT-s-OFDM QPSK	1@0	see graph	---
5	15	5	178300	846.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
5	15	10	174800	829.0	DFT-s-OFDM BPSK	1@0	see graph	---
5	15	10	174800	829.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
5	15	10	174800	829.0	DFT-s-OFDM QPSK	1@0	see graph	---
5	15	10	174800	829.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
5	15	10	176300	836.5	DFT-s-OFDM BPSK	1@0	see graph	---
5	15	10	176300	836.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
5	15	10	176300	836.5	DFT-s-OFDM QPSK	1@0	see graph	---
5	15	10	176300	836.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
5	15	10	177800	844.0	DFT-s-OFDM BPSK	1@0	see graph	---
5	15	10	177800	844.0	DFT-s-OFDM BPSK	1@0	see graph	PASS

5	15	10	177800	844.0	DFT-s-OFDM QPSK	1@0	see graph	---
5	15	10	177800	844.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
5	15	20	175800	834.0	DFT-s-OFDM BPSK	1@0	see graph	---
5	15	20	175800	834.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
5	15	20	175800	834.0	DFT-s-OFDM QPSK	1@0	see graph	---
5	15	20	175800	834.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
5	15	20	176300	836.5	DFT-s-OFDM BPSK	1@0	see graph	---
5	15	20	176300	836.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
5	15	20	176300	836.5	DFT-s-OFDM QPSK	1@0	see graph	---
5	15	20	176300	836.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
5	15	20	176800	839.0	DFT-s-OFDM BPSK	1@0	see graph	---
5	15	20	176800	839.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
5	15	20	176800	839.0	DFT-s-OFDM QPSK	1@0	see graph	---
5	15	20	176800	839.0	DFT-s-OFDM QPSK	1@0	see graph	PASS


B7_N5(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

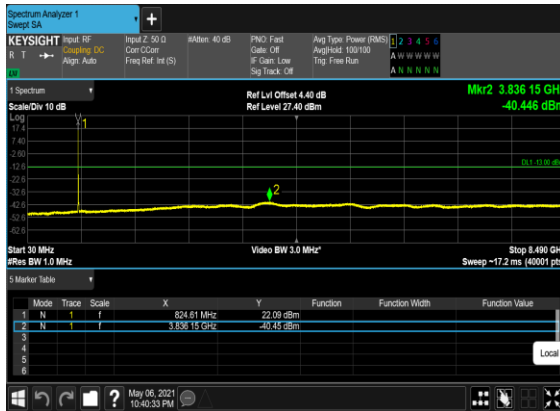


B7_N5(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

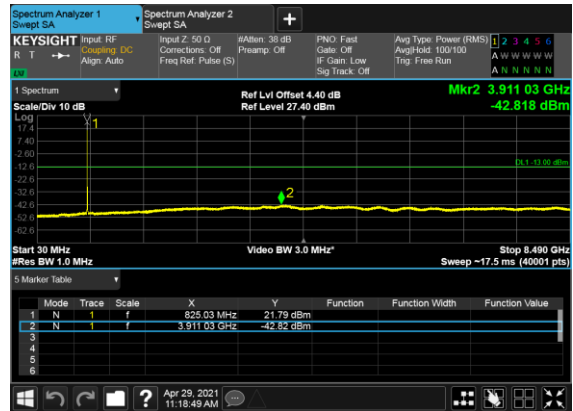


B7_N5(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

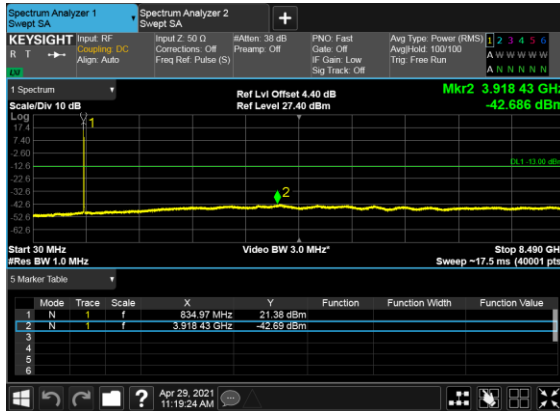


B7_N5(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

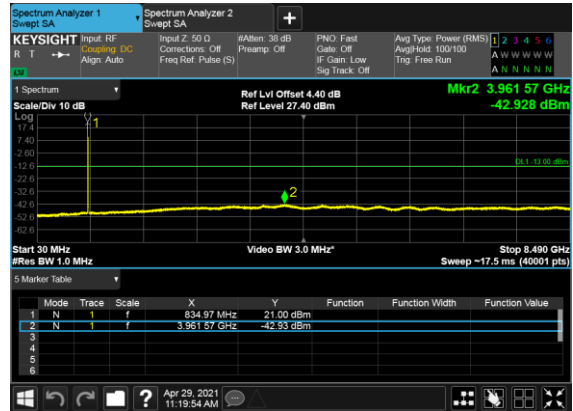


B7_N5(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH

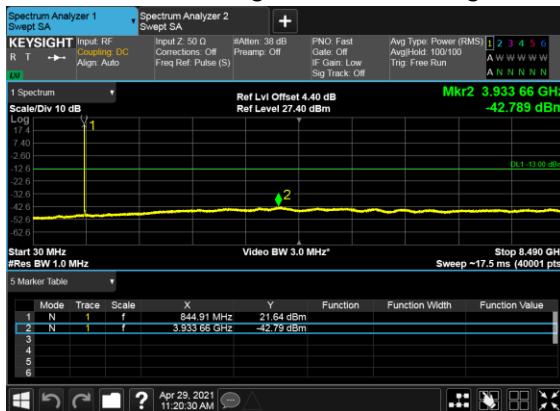


B7_N5(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

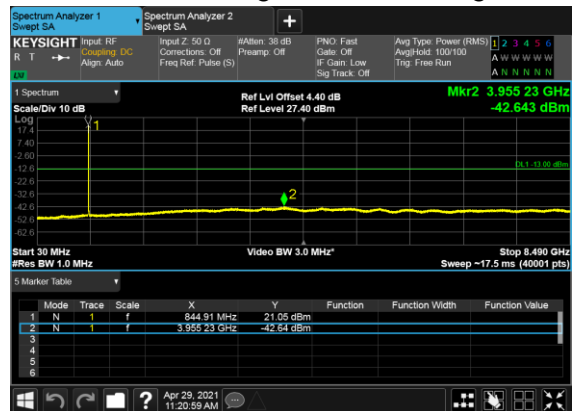


B7_N5(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_C

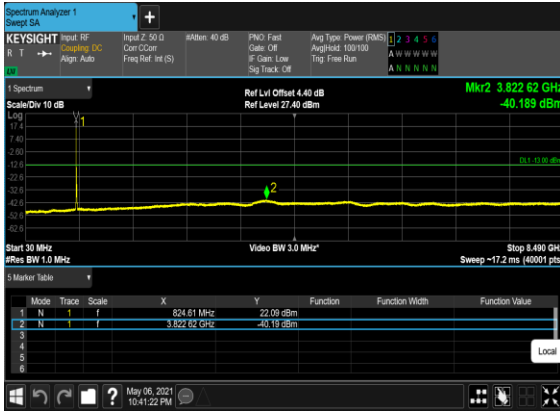


B7_N5(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

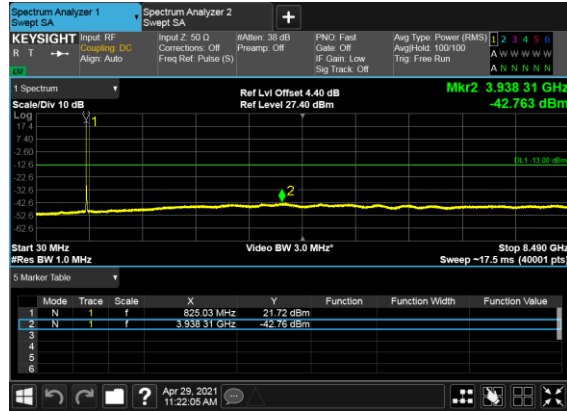


B7_N5(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

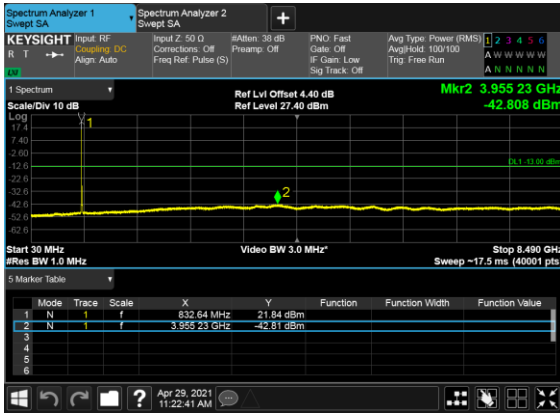

B7_N5(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

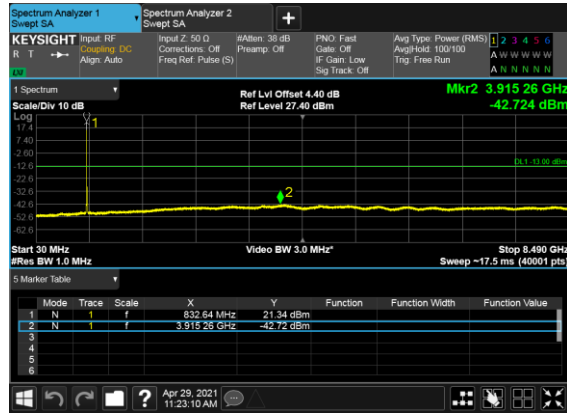

B7_N5(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH

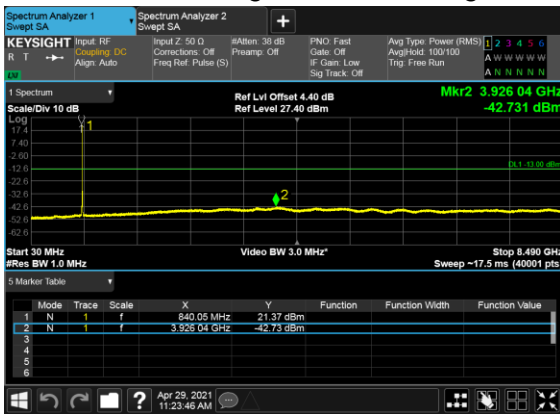

B7_N5(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

