



MOTOROLA

MOBILE DEVICES BUSINESS

**PRODUCT SAFETY AND COMPLIANCE
EMC LABORATORY**


EMC TEST REPORT

Test Report Number – 18257-1

Report Date – August 9, 2006

The test results contained herein relate only to the model(s) identified. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

As the responsible EMC Engineer, I hereby declare that the equipment tested as specified in this report conforms to the requirements indicated.

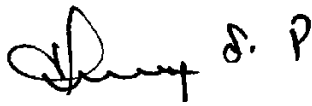Signature: 

Name: Thanigaiselvan Palaniswami

Title: EMC Engineer

Date: August 9, 2006

This report must not be reproduced, except in full, without written approval from this laboratory.

THIS REPORT MUST NOT BE USED TO CLAIM PRODUCT ENDORSEMENT BY A2LA OR ANY AGENCY OF THE U.S. GOVERNMENT.

A2LA Certificate Number: 1651-01

Table of Contents

Description	Page
Test Report Details	3
Applicable Standards	3
Summary of Testing	4
General and Special Conditions	4
Equipment and Cable Configuration	5
Measurement Procedures and Data	6
RF Power Output	6
Measurement results	6
Radiated Power	7
Measurement results	7
Occupied Bandwidth	8
Measurement results	8
Spurious Emissions at Antenna Terminals	11
Measurement results	11
Field Strength of Spurious Emissions	13
Measurement results	13
Frequency Stability	15
Measurement results	15
Field Strength of Spurious Emissions -Unintentional Radiators	17
Measurement results	17
AC Line Conducted Emissions	20
Measurement results	20
Appendix A - Radiated Emissions Test Setup Photos	24
Figure A – Substitution Measurement	24

Test Report Details

Tests Performed By: Motorola Mobile Devices business (MDb)
 Product Safety and Compliance Group
 600 North US Hwy 45
 Libertyville, IL 60048
 PH (847) 523-6167 Fax (847) 523-4538
 Motorola MDb FRN: 0004321311
 FCC Registration Number: 316588
 Industry Canada Number: IC3908-1

Tests Requested By: Motorola Inc.
 Mobile Devices business
 600 North US Hwy 45
 Libertyville, IL 60048

Product Type: Cellular Phone

Signaling Capability: GSM 1900, Bluetooth

FCC ID: IHDT6GP1

Serial Numbers: 00440102085654, 00440102085655,
 00440102085656

Testing Complete Date: June 22, 2006

Applicable Standards

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

- X Part 15 Subpart B – Unintentional Radiators
- X Part 24 – Personal Communications Services

Applicable Standards: TIA EIA 137-A, TIA EIA 98-C, ANSI 63.4 2003, RSS-118 (AMPS), RSS-128 (TDMA), RSS-129 (CDMA), RSS 132, RSS-133 (PCS)

Summary of Testing

Test #	Test Name	Pass/Fail
1	RF Power Output	NA
2	ERP (Effective Radiated Power)	Pass
3	Occupied Bandwidth	Pass
4	Spurious Emissions at Antenna Terminal	Pass
5	Field Strength of Spurious Emissions	Pass
6	Frequency Stability	Pass
7	Field Strength of Spurious Emissions from Unintentional Radiators	Pass

Test #	Test Name	Margin with respect to the Limit
1	RF Power Output	NA
2	EIRP (Effective Isotropic Radiated Power)	See results
3	Occupied Bandwidth	See Plots
4	Spurious Emissions at Antenna Terminal	14.4dB
5	Field Strength of Spurious Emissions	13.2 dB
6	Frequency Stability	See Plots
7	Field Strength of Spurious Emissions from Unintentional Radiators	Below noise floor

The margin with respect to the limit is the minimum margin for all modes and bands.

General and Special Conditions

The EUT was tested using a fully charged battery when applicable. Where a battery could not be used due to the need for a controlled variation of input voltage, an external power supply was utilized.

All testing was done in an indoor controlled environment with an average temperature of 22° C and relative humidity of 50%.

Equipment and Cable Configurations

The EUT was tested in a stand-alone configuration that is representative of typical use.

Manufacturer	Equipment Type	Model No.	Serial Number	Calibration Due Date
Rohde Schwarz	Receiver	ESI26	838786/010	6/17/06
Rohde Schwarz	Receiver	ESI40	100226	6/05/07
Hewlett-Packard	EMC Analyzer	7405	US394440191	6/8/06
A.H. Systems	DRG Horn Antenna	SAS 200/571	265	5/19/06
A.H. Systems Inc.	DRG Horn Antenna	SAS 200/571	365	5/25/06
A.H. Systems	DRG Horn Antenna	SAS200/571	365	5/12/07
ETS	Log-Periodic Antenna	3148	1189	8/22/06
ETS	Log-Periodic Antenna	3148	1188	6/14/06
ETS	Biconical Antenna	3110B	3369	8/15/06
Attenuator	Weinschel	AS-6	6675	1/10/07
Attenuator	Weinschel	AS-6	6677	11/14/06
Hewlett-Packard	Signal Generator	83623B	3844A01195	6/20/06
Thermotron	Environmental Chamber	S-4	31580	1/31/07
Agilent	Power Meter	E4416A	GB41293246	02/03/07
Agilent	Power Sensor	E4412B	US38486321	02/03/07
Miteq	Preamplifier	NSP2650-NFG	1084144	7/11/06
Dell	Laptop Computer	M20	NA	NA
Iomega	Zip Drive	Z250S	P9HM1992CK	NA
Olympus	Camera	D-600L	4020727	NA

All equipment is on a one-year calibration cycle.

Measurement Procedures and Data

RF POWER OUTPUT

Measurement Procedure

The RF output port of the equipment under test is directly coupled to the input of a Power meter through a 20dB passive attenuator, adaptor (if needed), and specialized RF connector. The peak power output is measured for all channels.

CFR47 Part 2.1046

Measurement Results

GSM 1900

Serial Number	Channel Number	Frequency MHz	Power dBm
00440102085654	512	1850.20	30.01
	661	1880.00	29.94
	810	1909.80	30.03
00440102085655	512	1850.20	30.07
	661	1880.00	29.91
	810	1909.80	30.02
00440102085656	512	1850.20	29.97
	661	1880.00	29.87
	810	1909.80	30.00

RADIATED POWER (EIRP)

Measurement Procedure

The phone was tested in a 16’ anechoic chamber with a 2-axis position system that permits taking complete spherical scans of the EUT’s radiation patterns. For all tests, the phone was supported in a free space type environment, vertically oriented in the chamber. Tests were done for GSM 1900 three frequencies (1850.2, 1880.00, and 1909.80 MHz) .

GSM measurements were made with the phone placed in a call using the CMU 200 mobile station test set. The phone was weakly coupled to the test set and configured to transmit in full data rate mode. Radiated power was measured at each 15 degree step. The radiated power was measured using a Gigatronics 8542C power meter in “Burst Avg” mode. From these measurements, the software calculates the angle at which maximum radiated power occurs for each case, and the radiated power at this angle was extracted from the data. To get ERP (effective radiated power referenced to a half-wave dipole), subtract 2.14 dB from these numbers.

Measurement Results

GSM 1900:	EIRP
1850.2 MHz:	31.63 dBm
1880.0 MHz:	30.60 dBm
1909.8 MHz:	30.03 dBm

For all measurements, calibration was performed via gain substitution with a half-wave dipole.

BAND/TECHNOLOGY	MAXIMUM EIRP(dBm)	MAXIMUM ERP (dBm)
1900 GSM	31.63	29.49

OCCUPIED BANDWIDTH

CFR Part 2.1049, 22.917, 24.238

Measurement Procedure

The RF output port of the equipment under test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. The amplitude of the spectrum analyzer is corrected for the attenuator and any other applicable losses. The analyzer is set for Peak Detector and each trace is set for Max Hold. A fully charged battery was used for the supply voltage.

The middle channel within the designated frequency block was measured. For digital modulation, the lower and upper band edge plots are displayed.

Equipment Settings

Plot	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Sweep Points (#)	Trace Mode	Detector	Samples (≥ #)
Reference Plot - GSM 850	300	Auto	1001	Max Hold	Peak	30
OCBW - GSM 850	3	Auto	1001	Max Hold	Peak	30
Lower Band Edge - GSM 850	1	Auto	2004	Max Hold	Peak	30
Upper Band Edge - GSM 850	1	Auto	2004	Max Hold	Peak	30
Reference Plot - GSM 1900	300	Auto	1001	Max Hold	Peak	30
OCBW - GSM 1900	3	Auto	1001	Max Hold	Peak	30
Lower Band Edge - GSM 1900	1	Auto	2004	Max Hold	Peak	30
Upper Band Edge - GSM 1900	1	Auto	2004	Max Hold	Peak	30


- Notes: 1) When the video bandwidth is set to Auto the video bandwidth self adjusts for ³ the resolution bandwidth.
 2) The plotted data shown for the band edge measurements is representative of data taken with a true 3 kHz resolution bandwidth filter. The raw data was taken using a 1 kHz resolution bandwidth and was integrated to produce a response representative of data taken using a true 3 kHz resolution bandwidth filter.

Measurement Results


Attached

Measurement Results – GSM 1900


GSM 1900 Reference Plot

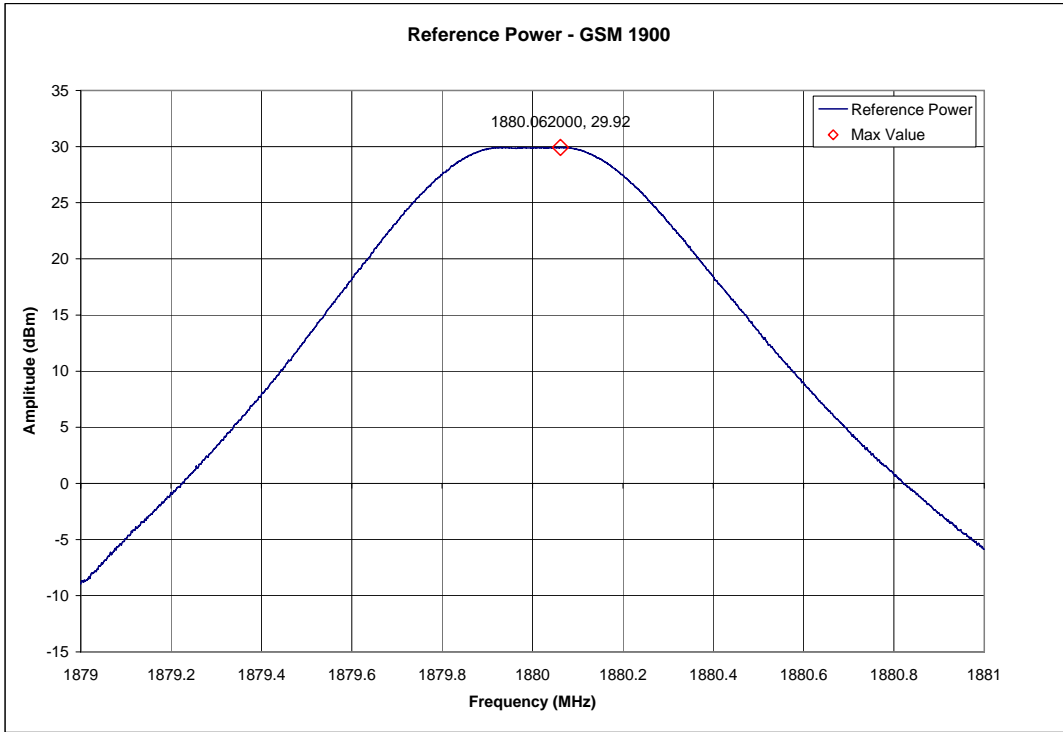


GSM 1900 Occupied Bandwidth

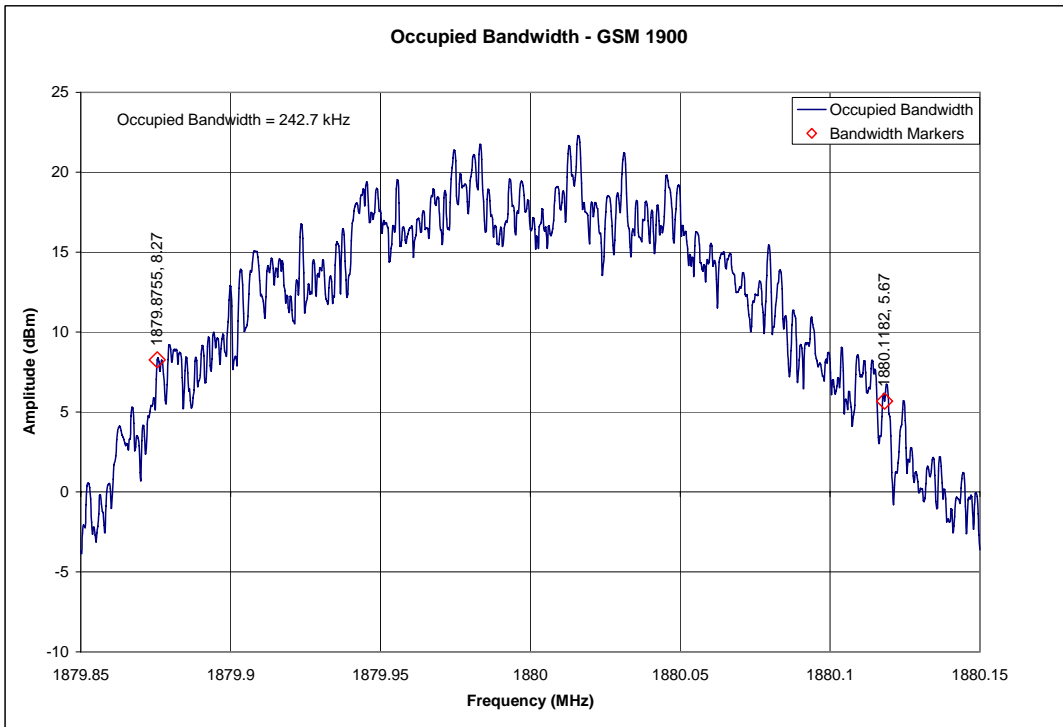

GSM/PCS 1900 Ch512 Lower Band Edge

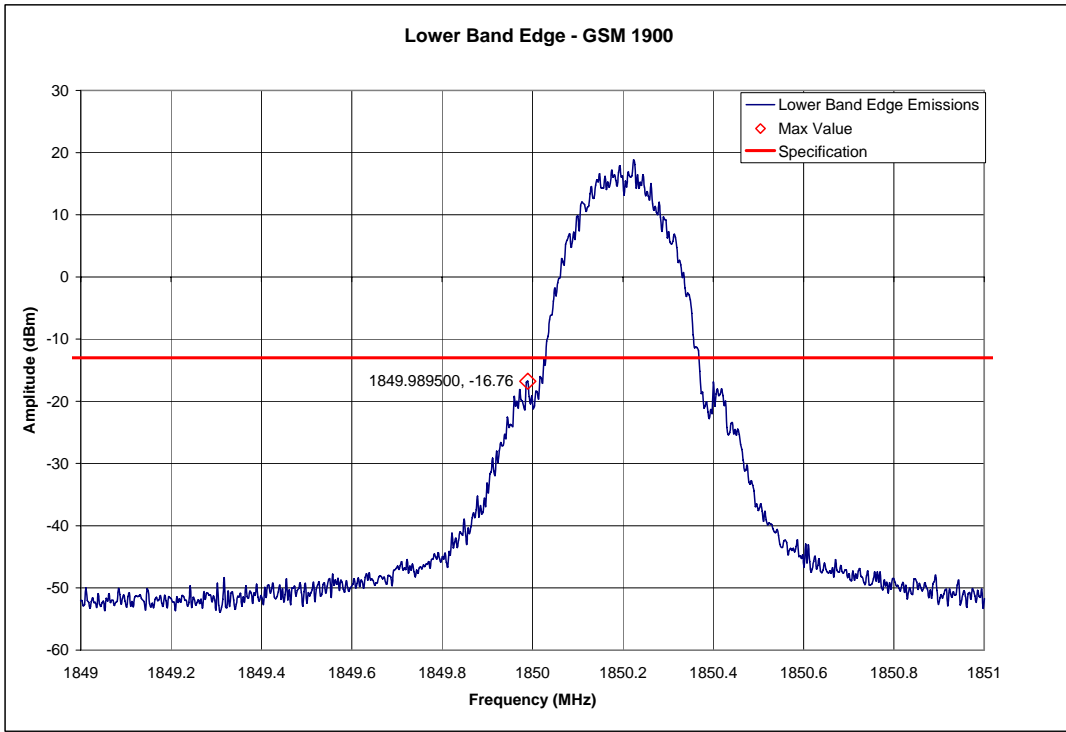

GSM 1900 Ch810 Upper Band Edge

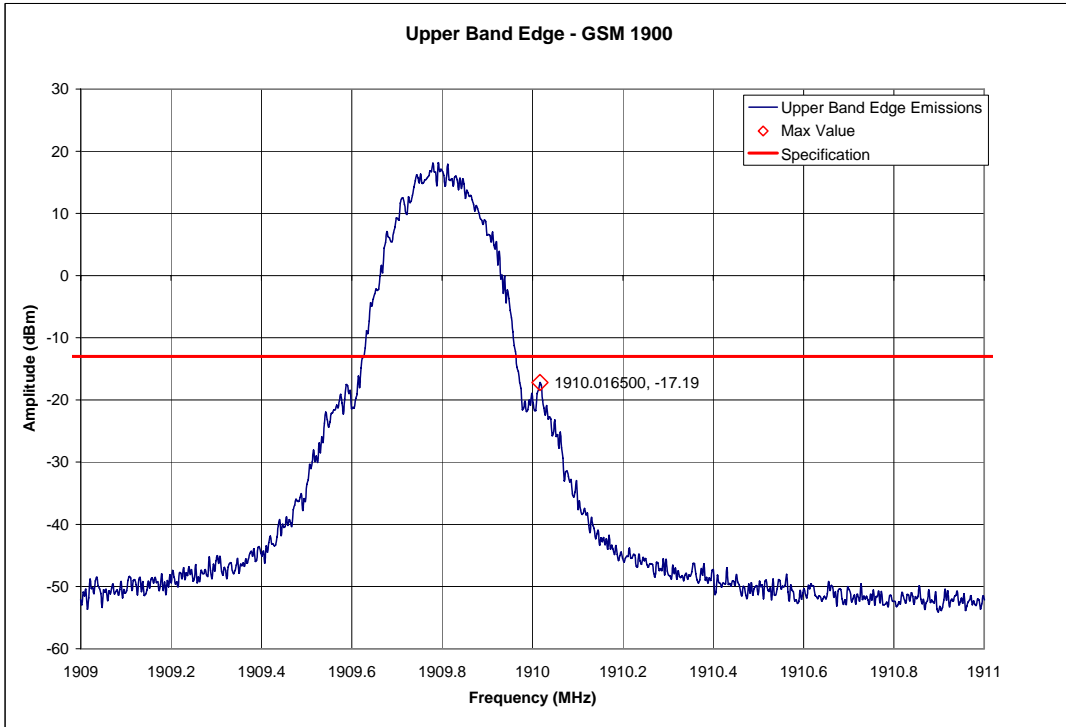

SPURIOUS EMISSIONS AT ANTENNA TERMINALS

CFR47 Part 2.1051, 24.238

Measurement Procedure

The RF output port of the Equipment Under Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.

The spectrum was investigated from the lowest frequency signal generated, without going below 9 kHz, up to at least the tenth harmonic of the fundamental or 40 GHz, whichever is lower.

The spectrum analyzer settings were as follows:

Units	dBm
Divisions	10 dB
Resolution Bandwidth	1 MHz
Video Bandwidth (AVG)	Auto
Sweep Time	Auto


Measurement Results

Attached

Measurement Results
Modulation: GSM 1900

Conducted Spurious and Harmonic Emissions

Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	-41.1
3rd harmonic	-13	-41.0
4th harmonic	-13	-47.5
5th harmonic	-13	-40.2
6th harmonic	-13	-35.7
7th harmonic	-13	-27.4
8th harmonic	-13	-36.6
9th harmonic	-13	-47.8
10th harmonic	-13	*

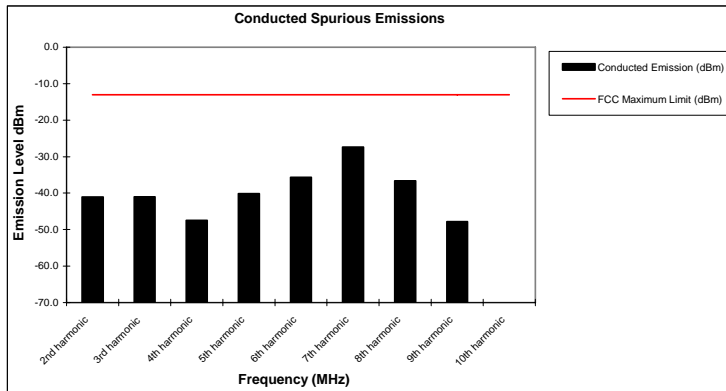

Notes:

1. * Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands

FIELD STRENGTH OF SPURIOUS EMISSIONS

CFR47 Part 2.1053, 22.917, 24.238

Measurement Procedure

The equipment under test is placed inside the semi-anechoic chamber on a wooden table at the turntable center. For each spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum reading on the spectrum analyzer. This is repeated for both horizontal and vertical polarizations of the receive antenna.

The equipment under test is then replaced with a substitution antenna fed by a signal generator. With the signal generator tuned to a particular spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters to obtain a maximum reading at the spectrum analyzer. The output of the signal generator is then adjusted until a reading identical to that obtained with the actual transmitter is achieved.

The power in dBm of each spurious emission is calculated by correcting the signal generator level for cable loss and gain of the substitution antenna referenced to a dipole. A fully charged battery was used for the supply voltage.

The settings of the receiver were as follows:

Units	dBm
Divisions	5 dB
Resolution Bandwidth	1 MHz
Video Bandwidth (AVG)	Auto
Sweep Time	Auto


Measurement Results

Attached

Modulation: GSM 1900

Radiated Spurious and Harmonic Emissions

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	-27.4	-26.2
3rd harmonic	-13	*	*
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*

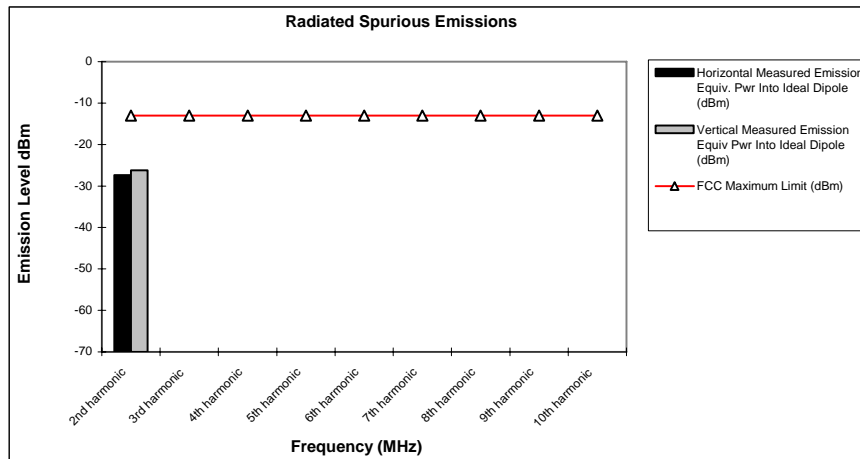

Notes:

1. * Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands

FREQUENCY STABILITY

CFR47 Part 2.1055, 24.235

Measurement Procedure

The equipment under test is placed in an environmental chamber. The antenna port of the Equipment Under Test is directly coupled to the input of the measurement equipment through a specialized RF connector. A power supply is attached as the primary voltage supply.

Frequency measurements are made at the extremes of the temperature range -30°C to $+60^{\circ}\text{C}$ and at intervals of 10°C with the primary supply voltage set to the nominal battery operating voltage. A period of time sufficient to stabilize all components of the equipment is allowed at each frequency measurement. The maximum variation of frequency is measured.

At room temperature, the primary supply voltage is reduced to the battery operating endpoint of the equipment under test. The maximum variation of frequency is measured. A battery eliminator was used for the input supply voltage.

Measurement Results


Attached

Measurement Results
Modulation: GSM 1900

Frequency Stability

Mode: GSM 1900 **Operating Frequency:** 1880.0 MHz
Channel: 661 **Deviation Limit (PPM):** 2.5 ppm

Temperature C	Frequency Error HZ	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	49.86	0.027	100%	3.8V
-20 C	36.06	0.019	100%	3.8V
-10 C	40.54	0.022	100%	3.8V
0 C	45.90	0.024	100%	3.8V
10 C	31.84	0.017	100%	3.8V
20 C	38.19	0.020	100%	3.8V
30 C	26.36	0.014	100%	3.8V
40 C	-24.76	-0.013	100%	3.8V
50 C	-49.12	-0.026	100%	3.8V
60 C	-38.53	-0.020	100%	3.8V
20 C	28.63	0.015	Battery Endpoint	3.5V

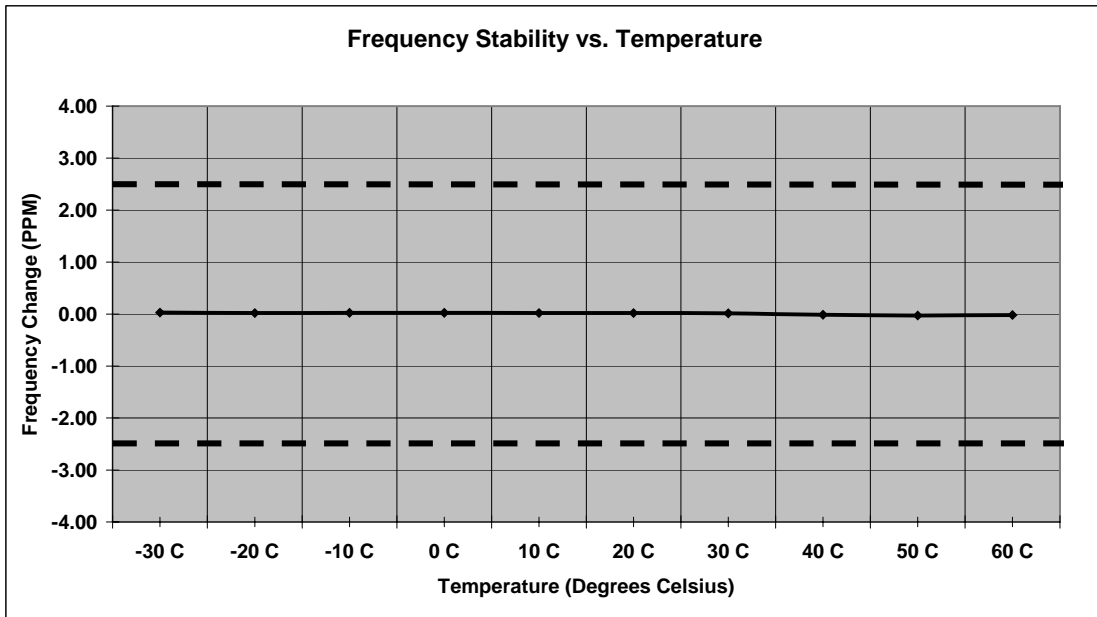

FIELD STRENGTH OF EMISSIONS FROM UNINTENTIONAL RADIATORS

CFR Part 15.109

Measurement Procedure

The equipment under test is placed inside the semi-anechoic chamber on a wooden table at the turntable center. For each radiated emission, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum peak reading on the spectrum analyzer. The radiated emissions are then measured using an EMI receiver employing a CISPR quasi-peak detector function below 1000 MHz and an average detector function above 1000 MHz. This is repeated for both horizontal and vertical polarizations of the receive antenna. A fully charged battery was used for the supply voltage.

The field strength of each radiated emission is calculated by correcting the EMI receiver level for cable loss, amplifier gain, and antenna correction factors.


$$\text{Field Strength (dBuV/m)} = \text{EMI Receiver Level (dBuV)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)} + \text{Antenna Correction Factor (1/m)}$$
Measurement Results

Attached

Measurement Results
Modulation: GSM1900

Receiver Radiated Spurious Emissions

Frequency (MHz)	FCC Maximum Limit (dBuV/m)	Horizontal Measured Field Strength (dBuV/m)	Vertical Measured Field Strength (dBuV/m)
Local Oscillator	54	*	*
2nd harmonic	54	*	*
3rd harmonic	54	*	*
4th harmonic	54	*	*
5th harmonic	54	*	*
6th harmonic	54	*	*
7th harmonic	40	*	*
8th harmonic	40	*	*
9th harmonic	40	*	*
10th harmonic	40	*	*

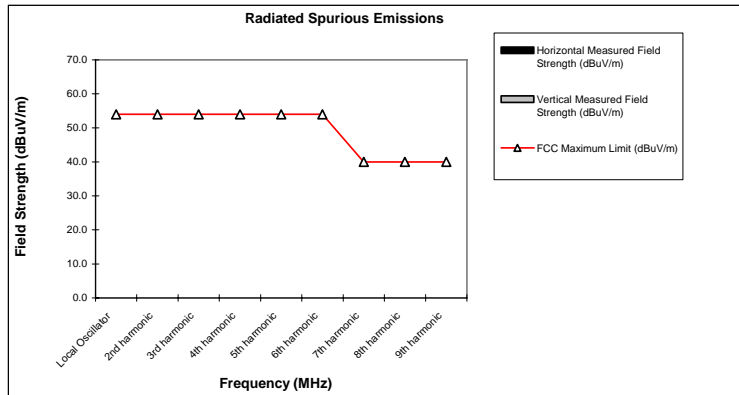

Notes:

1. * Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific frequency for the low, mid, and high channels.

Measurement Results
Computer Peripheral Testing

Test Setup

The EUT and the host equipment were setup according to the procedures in ANSI C63.4-2003. The EUT was connected to a laptop computer using a USB data cable. The USB data cable is 1 m in length. The parallel and the serial ports of the computer were populated. The EUT was communicating with the laptop computer continuously.

Operating Mode – Rx Mode, Data Transfer Mode.

30 MHz – 1000 MHz

Frequency	Level	Measured	Antenna Factor	Cable Loss	Limit	Margin	Height	Angle	Pol.
MHz	dBuV/m	dBuV	dB	dB	dBuV/m	dB	cm	deg	
31.08	32.88	12.04	13	7.8	40	7.1	100	250	VERT
34.44	35.56	15.92	11.8	7.8	40	4.4	119	179	VERT
35.04	36.41	16.92	11.6	7.8	40	3.6	100	185	VERT
35.12	36.36	16.89	11.6	7.8	40	3.6	100	147	VERT
82.72	30.83	12.99	8.9	8.9	40	9.2	132	227	VERT
107.36	35.77	15.2	11.1	9.5	43.5	7.7	100	231	VERT
137.68	33.71	11.39	12.4	9.9	43.5	9.8	192	232	HORI
191.4	32.34	7.18	14.6	10.5	43.5	11.2	210	77	HORI
196.36	40.63	14.85	15.2	10.6	43.5	2.9	100	224	HORI
229.08	40.65	17.79	11.9	10.9	46	5.3	150	208	HORI
327.28	37.88	10.37	15.5	12	46	8.1	100	257	HORI
365.04	39.01	11.37	15.4	12.2	46	7	182	182	VERT
912.16	39.13	-0.61	23.8	15.9	46	6.9	119	220	HORI
920.8	39	-0.66	23.7	16	46	7	250	34	HORI
938.88	38.96	-0.66	23.6	16	46	7	250	230	HORI
959.8	38.98	-0.51	23.4	16.1	46	7	352	308	HORI

Above 1 GHz

Frequency	Level	Measured	Antenna Factor	Cable Loss	Limit	Margin	Height	Angle	Pol.
MHz	dBuV/m	dBuV	dB	dB	dBuV/m	dB	cm	deg	
1119	35.67	20.39	24.1	8.8	53.9	18.2	283	79	HORI
1126.1	37.19	22.04	23.9	8.7	53.9	16.7	204	334	VERT
1241.1	34.06	17.68	24.7	8.3	53.9	19.8	183	118	VERT
1501.1	35.47	17.67	25.4	7.6	53.9	18.4	400	197	VERT
1512.8	35.46	17.6	25.4	7.6	53.9	18.4	196	39	VERT
1949.8	39.26	17.56	27.8	6.2	53.9	14.6	400	7	VERT
1978	39.89	17.28	28.6	6	53.9	14	352	158	HORI
1988.6	39.56	17.16	28.4	5.9	53.9	14.3	350	125	VERT

AC LINE CONDUCTED EMISSIONS

CFR 47 Part 15.207

Measurement Procedure

Measured levels of ac power line conducted emission shall be the radio-noise voltage from the line probe or across the 50 Ω LISN port, where permitted, terminated into a 50 Ω noise meter, or where permitted or required, the radio-noise current on the power line sensed by a current probe.

All radio-noise voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord or calibrated extension cord by the use of mating plugs and receptacles on the EUT and LISN. Equipment shall be tested with power cords that are normally supplied using an LISN, the 50 Ω measuring port is terminated by a 50 Ω radio-noise meter or a 50 Ω resistive load. All other ports are terminated in 50 Ω .


Measurement Results

See attached:


Green – Peak Detector

Purple- Average Detector


PCS Channel 512 - Tx Mode - Line Coupling

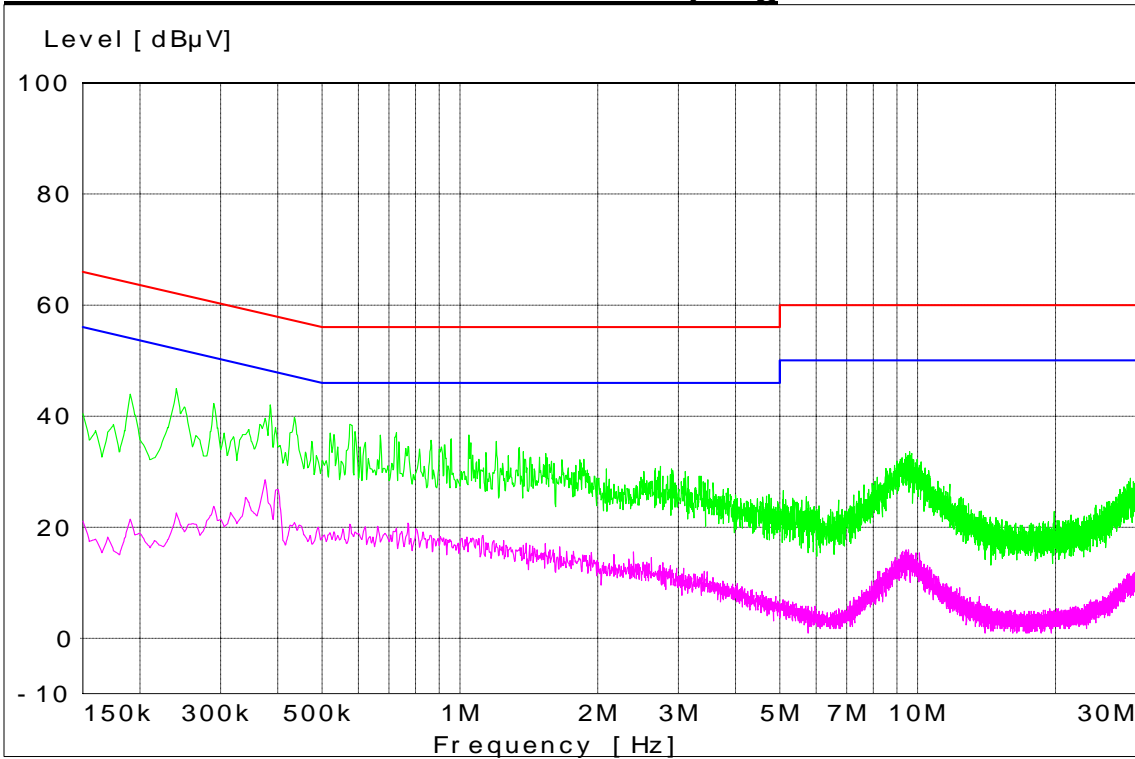


PCS Channel 512 - Tx Mode - Neutral Coupling

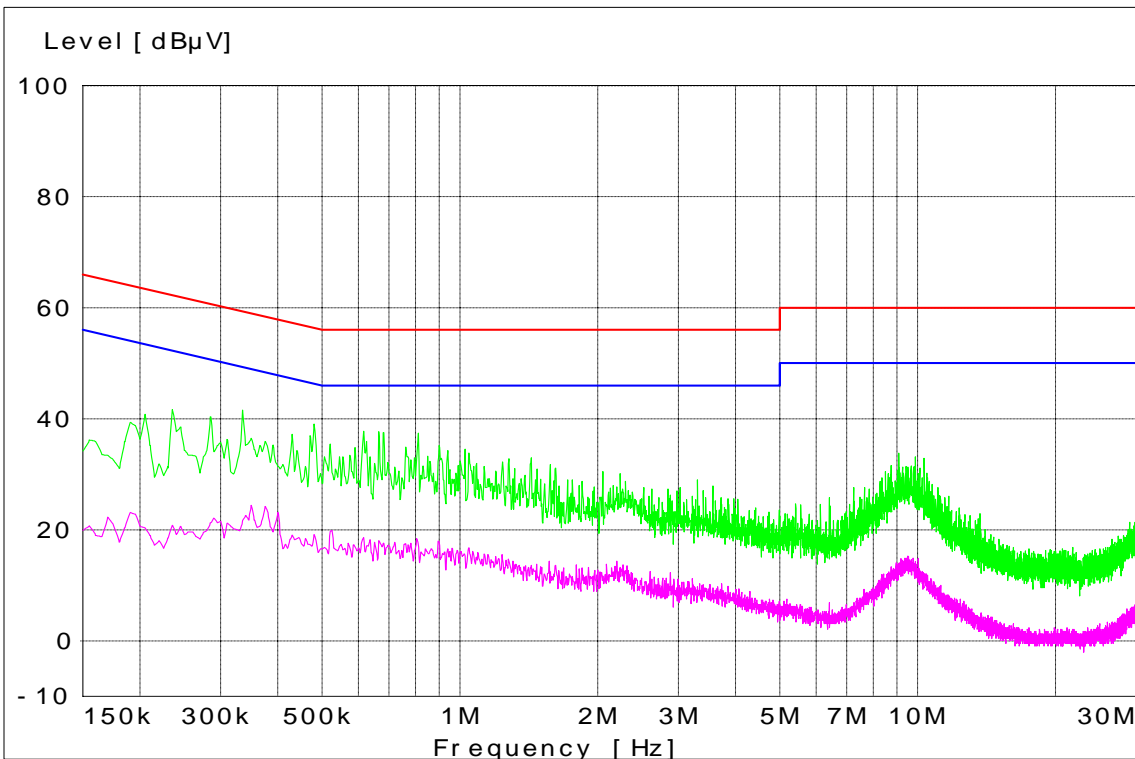


PCS Channel 661 - Tx Mode - Line Coupling

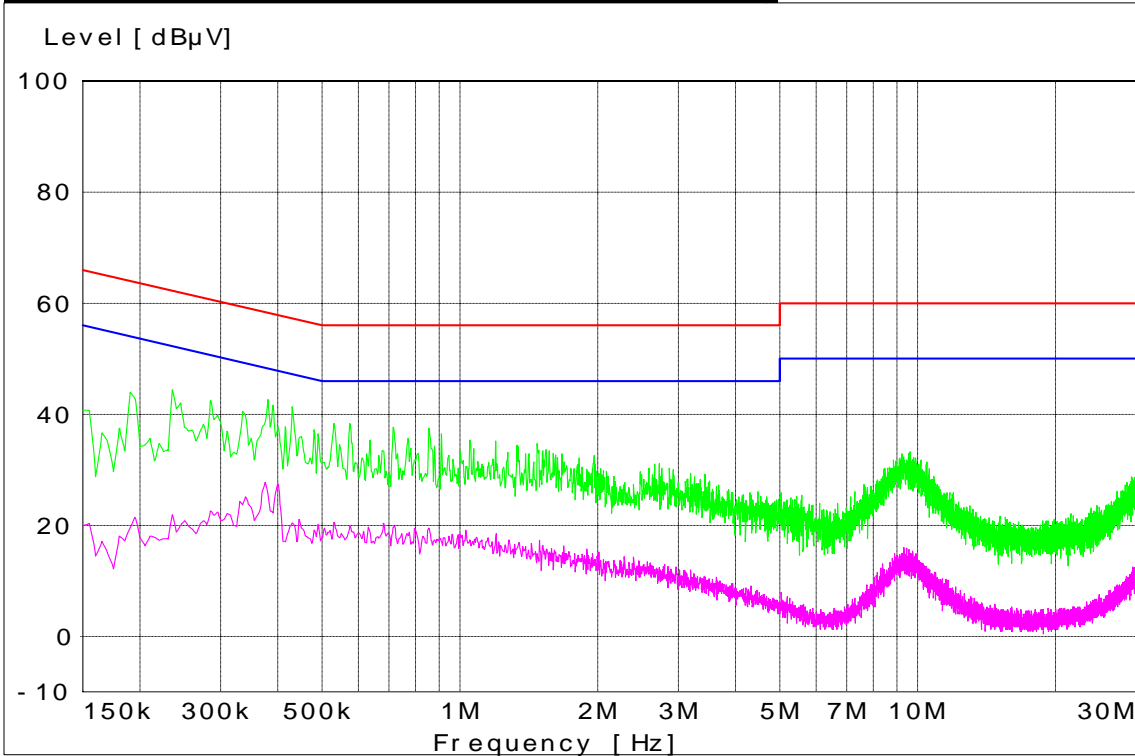


PCS Channel 661 - Tx Mode - Neutral Coupling

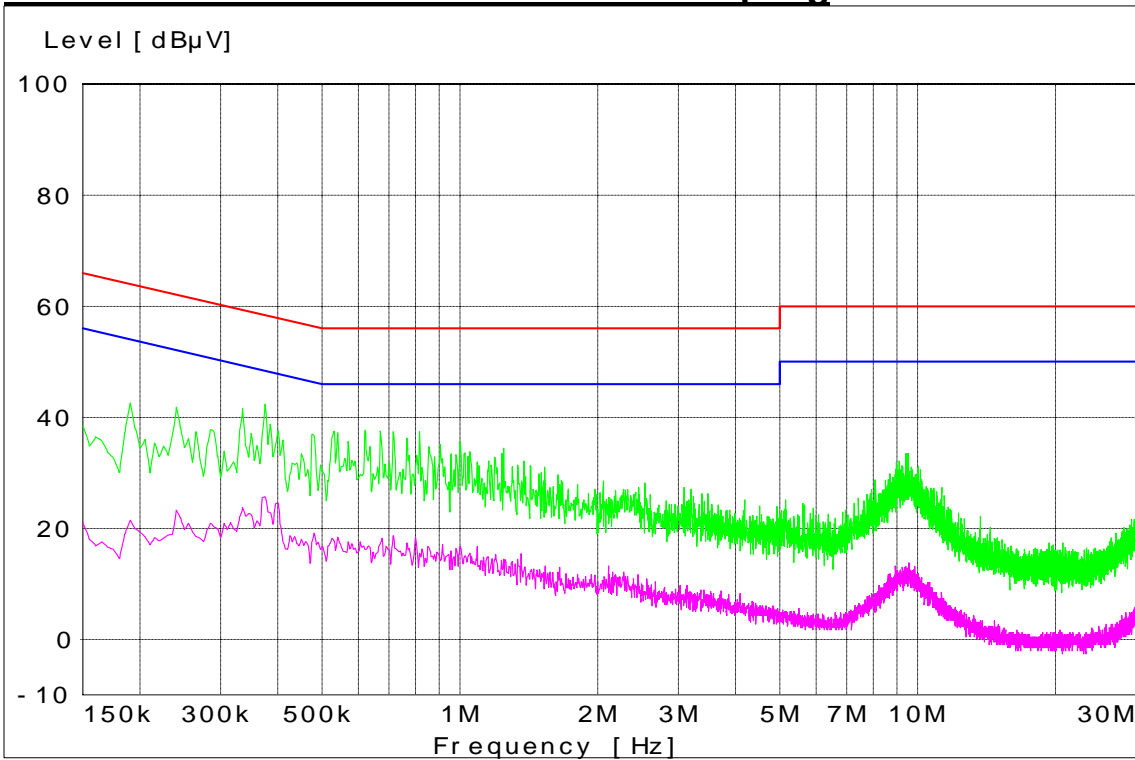

PCS Channel 810 - Tx Mode - Line Coupling

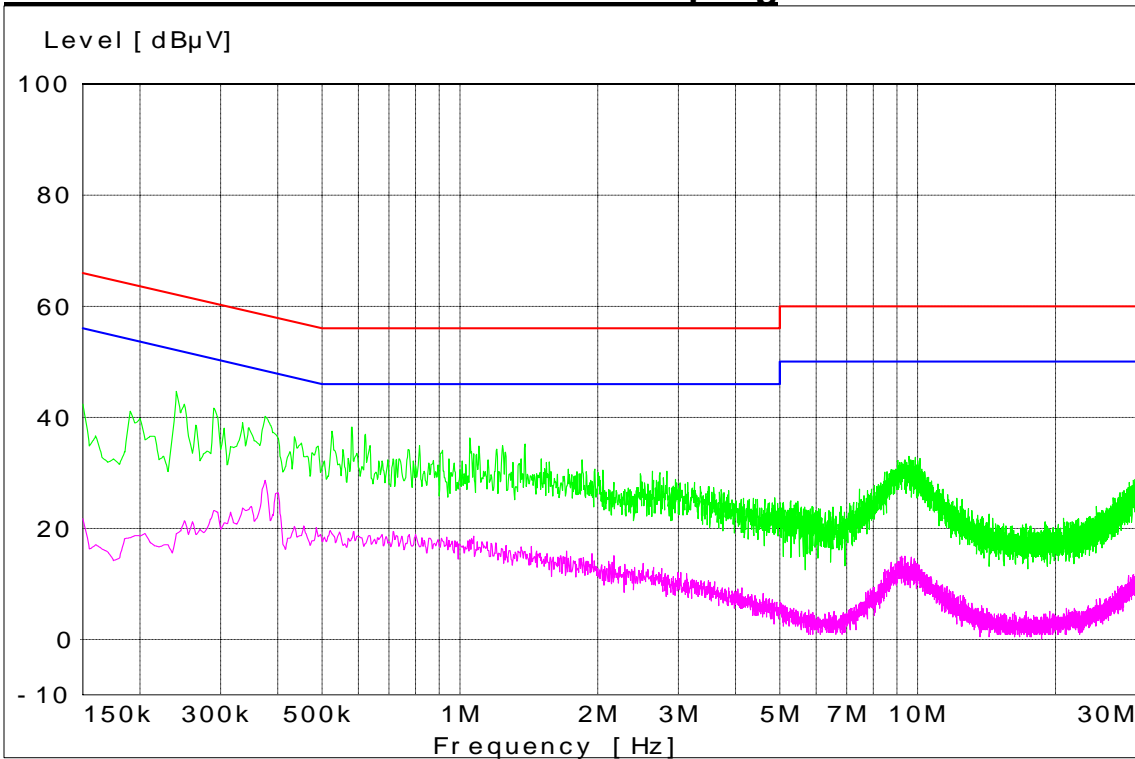

PCS Channel 810 - Tx Mode - Neutral Coupling

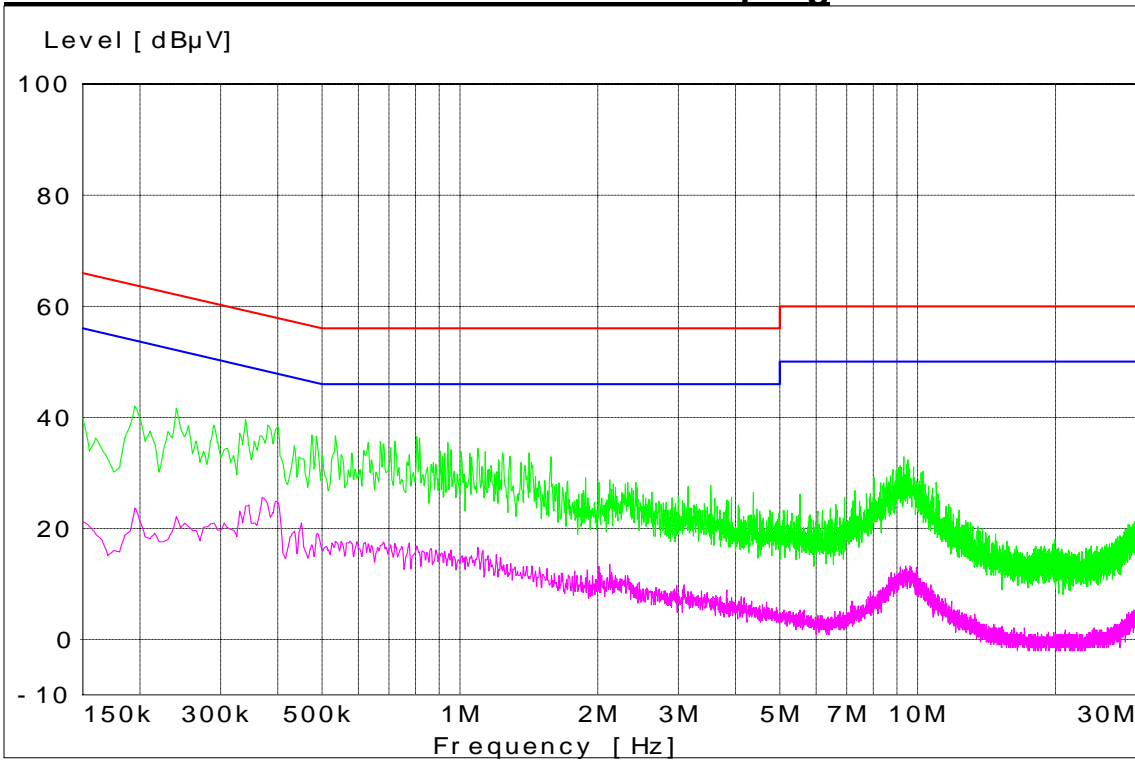

End of Test Report