
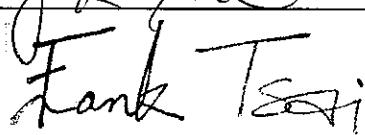
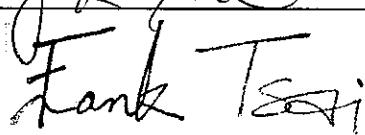


EXHIBIT B

Test Report

| | |
|---------------------|--|
| Report No. | T6474181 |
| Specifications | FCC Part 74 – Certification |
| Test Method | ANSI C63.4 1992 |
| Applicant address | 12F-9, No. 20, Ta-Long Road, Taichung, Taiwan |
| Applicant | TAKY ELECTRONICS CO., LTD. |
| Items tested | Wireless Microphone |
| Model No. | JH-D5 (Sample # T64181) |
| Results | Compliance (As detailed within this report) |
| Date | 08/30/2000 (month / day / year) (Sample received) 10/26/2000 (month / day / year) (Test) |
| Prepared by |  _____  _____ Project Engineer |
| Authorized by |  _____ General Manager (Frank Tsai) |
| Issue date | November 9, 2000 (month / day / year) |
| Modifications | None |
| Tested by | Training Research Co., Ltd. |
| Office at | 2, Lane 194, Huan-Ho Street, Hsichih, Taipei Hsien 221, Taiwan |
| Anechoic Chamber at | 2, Lane 194, Huan-Ho Street, Hsichih, Taipei Hsien 221, Taiwan |

Conditions of issue:

- (1) *This test report shall not be reproduced except in full, without written approval of TRC. And the test result contained within this report only relate to the sample submitted for testing.*
- (2) *This report must not be used by the client to claim product endorsement by NVLAP or any agency of U.S. Government.*

★ FCC ID : INGJH-D5

Contents

Chapter 0 Application for Certification..... 4

Chapter 1 General

| | |
|---|---|
| 1.1 Introduction..... | 5 |
| 1.2 Description of Support Equipment | 5 |
| 1.3 Configuration of System Under Test..... | 6 |
| 1.4 Location of the Measurement Site..... | 6 |
| 1.5 General Test Condition..... | 6 |

Chapter 2 Power Output Measurement

| | |
|---|----|
| 2.1 Rules and Specification Limits..... | 7 |
| 2.2 Measurement Condition and Setup | 7 |
| 2.3 List of Measurement Instrument | 8 |
| 2.4 Measurement Configuration..... | 9 |
| 2.5 Measurement Result | 10 |

Chapter 3 Modulation Characteristics Measurement

| | |
|---|----|
| 3.1 Rules and Specification Limits..... | 11 |
| 3.2 Test Configuration & List of Test Instruments..... | 11 |
| 3.3 Measurement Condition & Setup | 12 |
| 3.4 Frequency Response of Audio Low Pass Filter Measurement Condition & Setup | 12 |
| 3.5 Modulation Limiting Measurement Condition & Setup | 12 |

Chapter 4 Occupied Bandwidth Measurement & Calculation

| | |
|--|----|
| 4.1 Rules and Specification Limits..... | 15 |
| 4.2 Test Condition & Test Instruments..... | 15 |
| 4.3 Measurement Procedure..... | 16 |
| 4.4 Measurement Result | 16 |

Chapter 5 Field Strength of Spurious Radiation Measurement

| | |
|--|----|
| 5.1 Rules and Specification Limits..... | 17 |
| 5.2 Measurement Condition & Setup | 17 |
| 5.3 List of Measurement Instruments..... | 18 |
| 5.4 Measurement Configuration..... | 19 |
| 5.5 Measurement Result | 21 |

Chapter 6 Frequency Stability Tolerance Measurement

| | |
|--|----|
| 6.1 Rules and Specification limits | 33 |
| 6.2 Measurement Condition & Setup with Temperature Variation..... | 33 |
| 6.3 List of Measurement Instruments with Temperature Variation | 33 |
| 6.4 Measurement Configuration with Temperature Variation..... | 34 |
| 6.5 Measurement Result with Temperature Variation..... | 35 |
| 6.6 Measurement Condition & Setup with Voltage Variation..... | 36 |
| 6.7 List of Measurement Instruments with Voltage Variation..... | 36 |
| 6.8 Measurement Configuration with Voltage Variation | 37 |
| 6.9 Measurement Result with Voltage Variation | 38 |

Chapter 0 Application for Certification

- 2.1033 (c)(1) : **TAKY ELECTRONICS CO., LTD.**— applicant and manufacturer
- 2.1033 (c)(2) : The equipment is a transmitter, wireless microphone
Model No.: JH-D5
- 2.1033 (c)(3) : Quantity production is planned. See Exhibit C
- 2.1033 (c)(4) : Type of emission – F3E- FM Modulation
- 2.1033 (c)(5) : 100Hz ~ 16.484KHz
- 2.1033 (c)(6) : 0.732 mW
- 2.1033 (c)(7) : Specification of 250 mW is met by the equipment in the applicable part 74.861 (e)(1)
- 2.1033 (c)(8) : Final RF amplifier stage current : 3V, UM-3*2
- 2.1033 (c)(9) : Description follows
- 2.1033 (c)(10) : Complete circuit diagrams are included. No modification was made
- 2.1033 (c)(11) : See Exhibit A. Instruction sheet to user included
- 2.1033 (c)(12) : See Exhibit F.
- 2.1033 (c)(13) : N/A
- 2.1033 (c)(14) : Description follows.
- 2.1033 (c)(15) : N/A
- 2.1033 (c)(16) : N/A
- 2.1033 (c)(17) : N/A

Chapter I GENERAL

1.1 Introduction :

The following measurement report is submitted on behalf of **TAKY ELECTRONICS CO., LTD.** in support of a wireless microphone certification in accordance with FCC Rules. 2.1031, 2.1046, 2.1047, 2.1049, 2.1053, 2.1055, 74.801 and 74.861.

Description of EUT :


| | | |
|-------------------------|---|--------------------------------|
| EUT | : | WIRELESS MICROPHONE |
| Model No. | : | JH-D5 |
| Carrier Frequency Range | : | 174 ~ 216 MHz |
| RF Power Output | : | 0.732 mW |
| Supply Voltage | : | DC 3V |
| Supply Current | : | 65 mA |
| Frequency Response | : | 100Hz ~ 16.484KHz |
| Frequency Stability | : | 0.005% |
| Operating Temperature | : | - 30 to + 50 degree centigrade |

Wireless microphone is a transmitter which operates in the frequency range of 174 ~ 216 MHz. (174.600MHz, 190.598MHz and 213.200MHz tested) This microphone is worn by a performer and other participants in a program, filming, reporting ...etc.

1.2 Description of Support Equipment :

N/A

1.3 Configuration of test setup

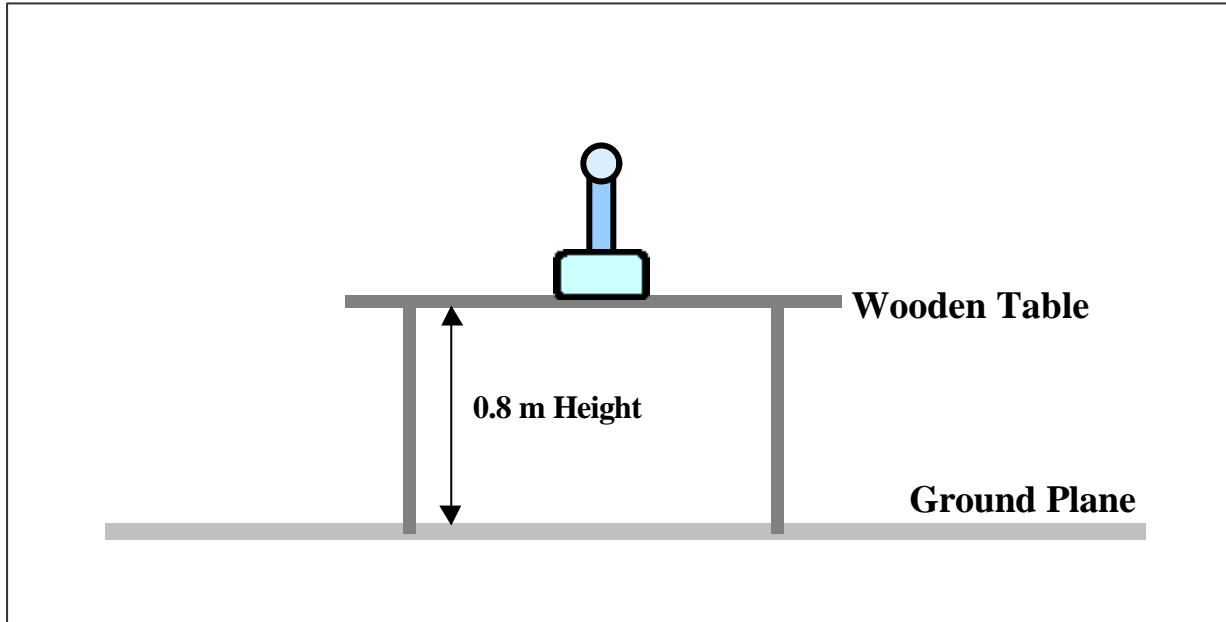

1.4 Location of the Measurement Site :

The radiated emissions measurements required by the Rules were performed on the Three-meter, anechoic chamber at test site maintained by **Training Research Co., Ltd.**, No. 2, Lane 194, Huan-Ho Street, Hsichih, Taipei Hsien 221, Taiwan. Complete description and measurement data have been placed on file with the Commission. The conducted power line Emissions tests were performed in a shielded enclosure also located at the above facility.

Training Research Co., Ltd. is listed by the FCC (Registration Number: 93906) as a facility available to do measurement work for others on a contract basis.

1.5 General Test Condition :

The conditions under which the EUT operates were varied to determine their effect on the equipment's emission characteristics. The final configuration of the test system and the mode of operation used during these tests were chosen as that which produced the highest emission levels. However, only those conditions, which the EUT was considered likely to encounter in normal use were investigated.

Chapter 2 Power Output Measurement

2.1 Rules and Specification Limits

2.1046

74.861 (e)(1) : The power of the measured unmodulated carrier power at output of the transmitter power amplifier (antenna input power) may not exceed the following:

1. 54 – 72, 76 – 88 and 174 – 216 MHz band 50 mW.
2. 470 – 608 AND 614 – 806 MHz band 250 mW.

2.2 Test condition and setup :

1. Measurement was made on open-field test site. The EUT system was placed on non-conductive turntable which is 0.8 meters height, top surface 1.0 X 1.5 meter. The EUT was placed in three direction of the space in order to obtain maximum emission.
2. A SCHAFFNER whole range antenna with horizontal and vertical polarization was raised from 1 – 4 meter as well as the turntable was rotate from 0 to 360 degree to search for the maximum Field Strength Spectrum where the spectrum analyzer was operated in the quasi-peak detection mode. Recorded all the values, which measured under horizontal and vertical position for the biconical antenna.
3. The following procedures were used to convert the emission levels measured in decibels referenced to 1 micro volt ($\text{dB}\mu\text{V}$) into field intensity in Watt.
 - (1) The actual field intensity in decibels referenced to 1 micro volt per meter ($\text{dB}\mu\text{V/m}$) is determined by algebraically adding the measured reading in $\text{dB}\mu\text{V}$, the antenna factor (dB), and cable loss (dB) at the appropriate frequency.
 - (2) The field intensity in Volt can then be determined by the following equation:

$$\text{FI(Volt)} = 10^{\frac{\text{FI}(\text{dB}\mu\text{V/m})}{20}} \times 10^{-6}$$

$$\text{FI}_a(\text{dBmV/m}) = \text{FI}_r(\text{dBmV}) - \text{Corrected (dB)}$$

$$\text{Corrected (dB)} = \text{AF(dB)} + [\text{CL(dB)} - \text{Amplitude Gain}]$$

FI_a : Actual Field Intensity

FI_r : Reading of the Field Intensity

AF : Antenna Factor

CL : Cable Loss

The field intensity in Watt can then be determined by the following equation :

$$P \text{ (watt)} = F I^2 \text{ (Volt)} \times d^2 \text{ (meter)} / 49.2$$

P : Power in Watt


D : Measurement Distance (3 m)

2.3 List of test Instrument :

| <u>Instrument Name</u> | <u>Model No.</u> | <u>Brand</u> | <u>Serial No.</u> | <u>Calibration Date</u> | <u>Last time</u> | <u>Next time</u> |
|----------------------------------|------------------|--------------|-------------------|-------------------------|------------------|------------------|
| EMI Receiver | 8546A | H P | 3520A00242 | | 10/01/00 | 10/01/01 |
| RF Filter Section | 85460A | H P | 3448A00217 | | 10/01/00 | 10/01/01 |
| Bi-log Antenna | CBL6141A | Schaffner | 4151 | | 06/28/00 | 06/28/01 |
| Switch/Control Unit (> 30MHz) | 3488A | HP | N/A | | 11/20/99 | 11/20/00 |
| Auto Switch Box (> 30MHz) | ASB-01 | TRC | 9904-01 | | 11/20/99 | 11/20/00 |
| Spectrum Analyzer | 8564E | HP | US36433002 | | 08/03/00 | 08/03/01 |
| Microwave Preamplifier | 83051A | HP | 3232A00347 | | 08/04/00 | 08/04/01 |
| Horn Antenna | 3115 | EMCO | 9704 – 5178 | | 08/09/00 | 08/09/01 |

The level of confidence of 95%, the uncertainty of measurement of radiated emission is ± 4.96 dB.

2.4 Measurement Configuration

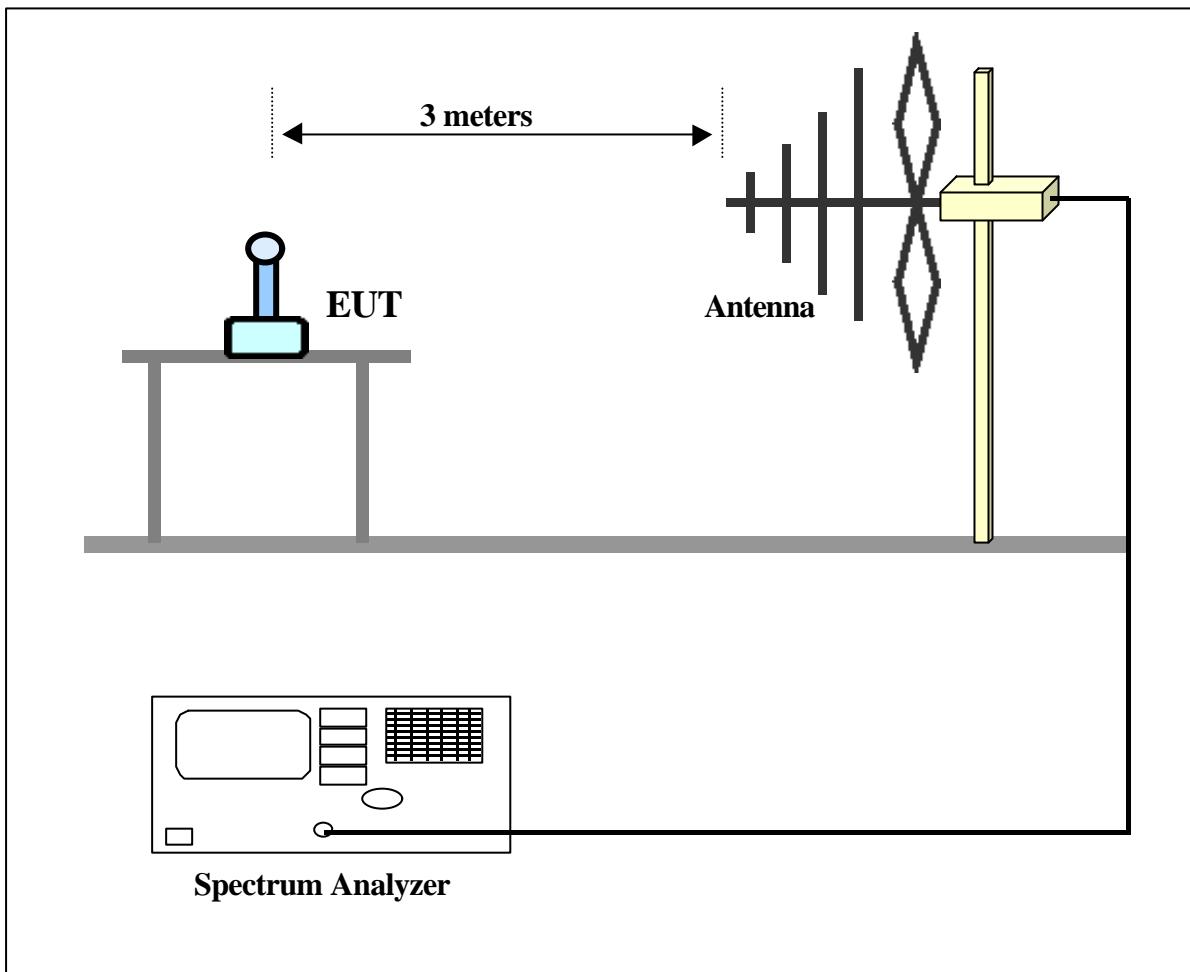

2.5 Measurement Result

(1) Frequency: 174.600 MHz

$$\begin{aligned}\text{Corrected (dB)} &= \text{AF(dB)} + [\text{CL(dB)} - \text{Amplitude Gain}] \\ &= -13.03 \text{ dB/m}\end{aligned}$$

$$\begin{aligned}\text{FI}_a (\text{dBmV/m}) &= \text{FI}_r (\text{dBmV}) - \text{Corrected (dB)} \\ &= 73.99 - (-13.03) \\ &= 87.02 \text{ dBmV/m}\end{aligned}$$

The maximum field measured is 87.02 dBmV/m

$$FI (\text{ Volt }) = 10^{87.02/20} \times 10^{-6} = 0.02244 \text{ V}$$

$$FI (\text{ mW }) = (0.02244 \times 3)^2 / 49.2 = 0.092104 \text{ mW}$$

(2) Frequency: 190.598 MHz

$$\begin{aligned}\text{Corrected (dB)} &= \text{AF(dB)} + [\text{CL(dB)} - \text{Amplitude Gain}] \\ &= -12.77 \text{ dB/m}\end{aligned}$$

$$\begin{aligned}\text{FI}_a (\text{dBmV/m}) &= \text{FI}_r (\text{dBmV}) - \text{Corrected (dB)} \\ &= 76.60 - (-12.77) \\ &= 89.37 \text{ dBmV/m}\end{aligned}$$

The maximum field measured is 89.37 dBmV/m

$$FI (\text{ Volt }) = 10^{89.37/20} \times 10^{-6} = 0.02941 \text{ V}$$

$$FI (\text{ mW }) = (0.02941 \times 3)^2 / 49.2 = 0.158226 \text{ mW}$$

(3) Frequency: 213.200 MHz

$$\begin{aligned}\text{Corrected (dB)} &= \text{AF(dB)} + [\text{CL(dB)} - \text{Amplitude Gain}] \\ &= -14.51 \text{ dB/m}\end{aligned}$$

$$\begin{aligned}\text{FI}_a (\text{dBmV/m}) &= \text{FI}_r (\text{dBmV}) - \text{Corrected (dB)} \\ &= 81.51 - (-14.51) \\ &= 96.02 \text{ dBmV/m}\end{aligned}$$

The maximum field measured is 96.02 dBmV/m

$$FI (\text{ Volt }) = 10^{96.02/20} \times 10^{-6} = 0.06324 \text{ V}$$


$$FI (\text{ mW }) = (0.06324 \times 3)^2 / 49.2 = 0.731606 \text{ mW}$$

Chapter 3 Modulation Characteristics Measurement

3.1 Rules and Specification Limits

- 2.1047 (a): Voice modulated communication equipment
 (b): Equipment which employs modulation limiting

3.2 Test Configuration & List of Test Instruments

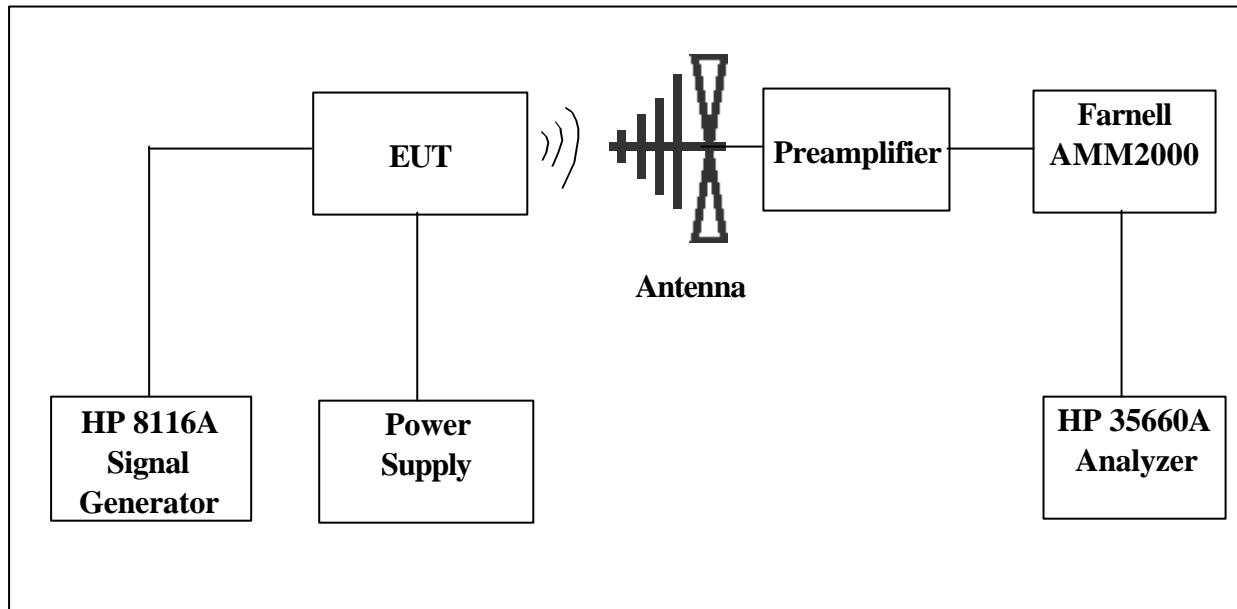

List of test instrument:

| Manufacturer | Device | Model No. | Input Impedance |
|--------------|-------------------------|-----------|-----------------|
| HP | Dynamic Signal Analyzer | HP35660A | 50 |
| HP | Signal Generator 50 MHz | HP8116A | 50 |
| SCHAFFNER | Bi-log Antenna | CBL6141A | 50 |
| Farnell | Modulation Meter | AMM2000 | 50 |
| TRC | Preamplifier | TRC001 | 50 |

3.3 Frequency Response of Audio Modulation Circuit Measurement Condition & Setup

2.1047 (a)

1. The EUT and test equipment were set up as shown on the Section 4.2.
2. The Plus/Function generator was connected to the audio input circuit/microphone of the EUT.
3. The audio signal input was adjusted to obtain 50% modulation at 1 kHz.
4. With input levels held constant and below limiting at all frequencies, the generator was varied from 100 Hz to 51.3 kHz.
5. The response in dBm relative to 1kHz was then measured, using the HP 35660A Dynamic Signal Analyzer as follow page.

3.4 Frequency Response of Audio Low Pass Filter Measurement Condition & Setup

1. The measurement conditions and setup as Section 3.3.
2. With input levels held constant and below limiting at all frequencies, the generator was varied from 1kHz to 103.4kHz.
3. The response in dBVRms relative to 1kHz was then measured, using the HP 35660A Dynamic Signal Analyzer as follow page.

3.5 Modulation Limiting Measurement Condition & Setup

2.1047 (b)

1. The Plus/Function generator was connected to the audio input circuit/microphone of the EUT.
2. The modulation response was measured for each of four frequencies: 100Hz, 1kHz, 2.148kHz, 6.120kHz and 16.484kHz.
3. The input level was varied from 30% modulation to at least 20 dB higher than the saturation point.
4. Measurements were performed for both negative and positive modulation and the respective results were recorded.
5. Measurement results as Chart 3.1 to 3.2

Chart 3.1 Modulation Limiting Measuerment Negative


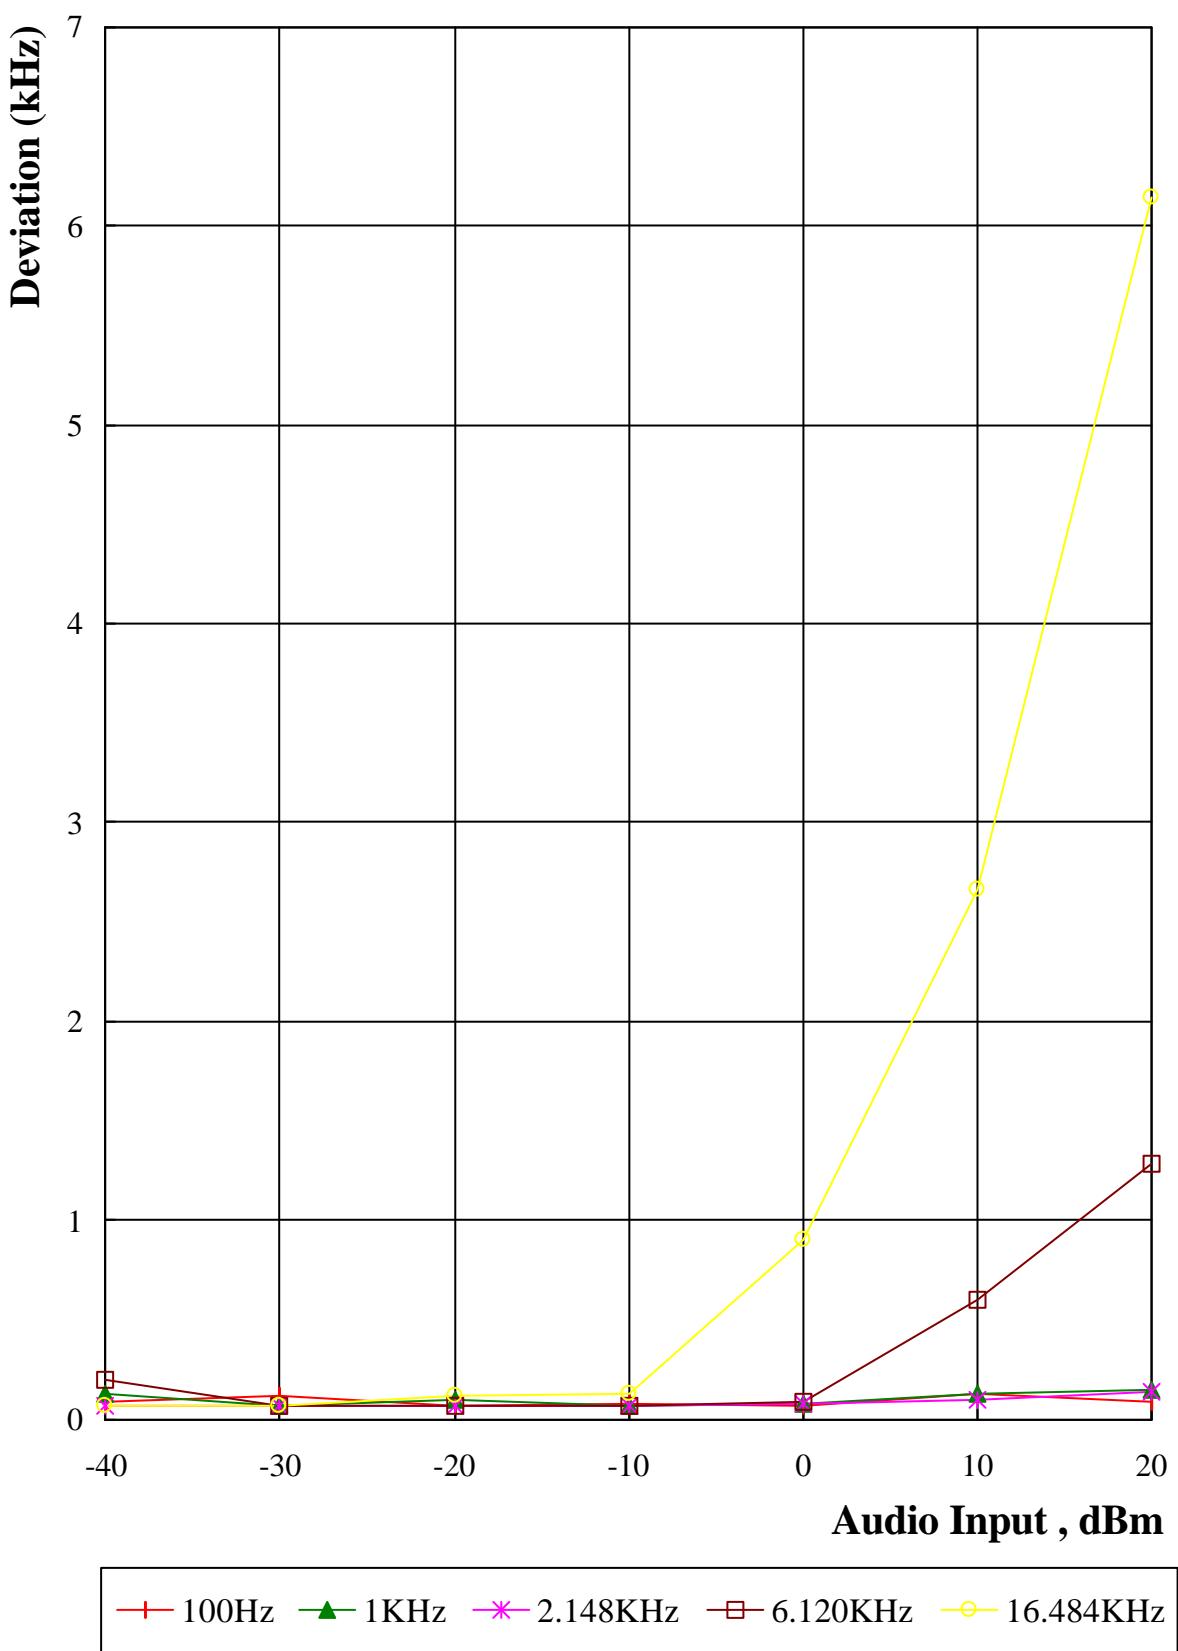


Chart 3.2 Modulation Limiting Measuermnt Positive

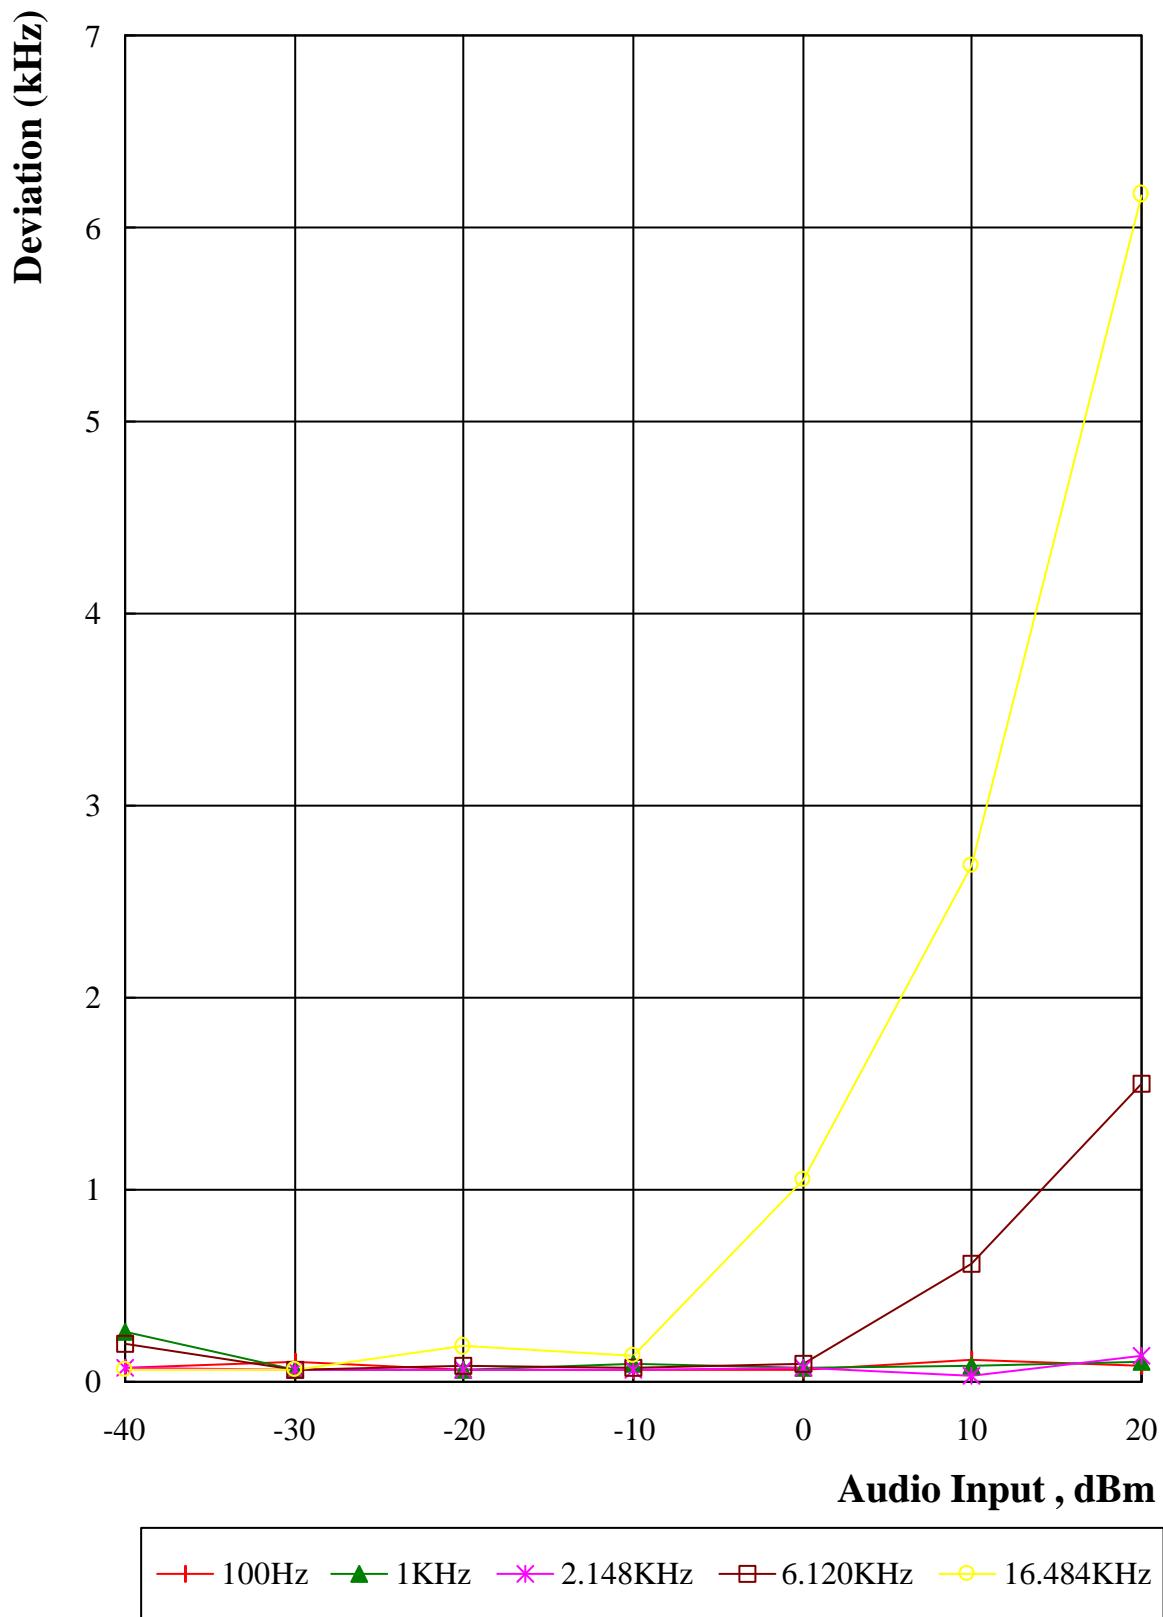

Chapter 4 Occupied Bandwidth Measurement


4.1 Rules and Specification Limits

2.1049.

74.861 (e)(3): Any form of modulation may be used. A maximum deviation of ± 75 kHz is permitted when frequency modulation is employed.

74.861 (e)(5): The operation bandwidth shall not exceed 200kHz.

4.2 Test Configuration & List of Test Instruments

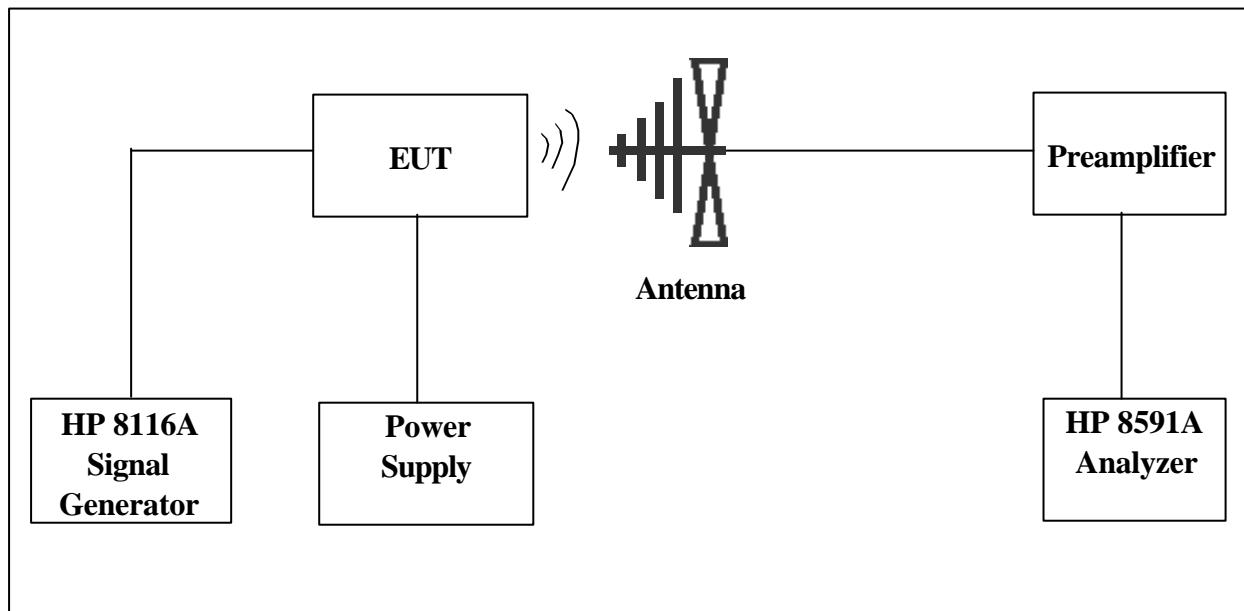

List of test Instrument :

| <u>Instrument Name</u> | <u>Model No.</u> | <u>Brand</u> | <u>Input Impedance</u> |
|-------------------------------|------------------|--------------|------------------------|
| Spectrum analyzer (9K~1.8GHz) | 8591A | HP | 50 |
| Preamplifier (30MHz~1GHz) | TRC001 | TRC | 50 |
| Signal Generator 50 MHz | HP8116A | HP | 50 |
| Bi-log Antenna | CBL6141A | SCHAFFNER | 50 |

4.3 Measurement Procedure

1. Connect the EUT as Section 4.2 .
2. Plot the unmodulated chart shows on spectrum.
3. Set the output of the signal generator to 100Hz, 1kHz, 2.148kHz, 6.120kHz and 16.484kHz. Increase the amplitude of the signal, while monitoring the modulation meter. Until modulation is max. Measure the bandwidth under 26 dB compared to the unmodulated fundamental carrier peak level of the modulated signal displayed on the spectrum analyzer.
4. The occupied Bandwidth was measured as follow pages.

4.4 Measurement Result

The occupied bandwidth's plot is presented on following pager, which illustrates compliance with the rules.

Calculation of Necessary Bandwidth (Bn)

$$Bn = 2M + 2D$$

$$M = \text{Max. Modulation Frequency} = 16.484 \text{ kHz}$$

$$D = \text{Peak Frequency Deviation} = 6.176 \text{ kHz } (\text{Chart 3-1})$$

$$K = 1$$

$$Bn = 45.320 \text{ kHz}$$

Chapter 5 Field Strength of Spurious Radiation Measurement

5.1 Rules and Specification Limits

2.1053 (a) : Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, Power leads, or intermediate circuit elements under normal conditions of installation and operation.

74.861(e)(6)(iii) : Spurious and harmonics must be at least $43 + 10 \log (\text{Output Power})$ below the Carrier peak

2.1057 : In all measurements set forth , the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency.

5.2 Measurement Condition & Setup

Pretest : The EUT is placed in a anechoic chamber, and scan from 30MHz to 1GHz.This is done to ensure the radiation exactly emits form the EUT.

Final test : Final radiation measurements is made on a **3 - meter, anechoic chamber.** The EUT is placed on a nonconductive table, which is 0.8m height, the top surface is 1.0 x 1.5 meter. All the placement is according to ANSI C63.4 - 1992.

The spectrum is examined from 30 MHz to 18 GHz measured by HP spectrum.

The SCHAFFNER and EMCO whole range Antenna is used to measure frequency from 30 MHz to 18 GHz. The final test is used the spectrum HP 8546A, HP 85460A and 8564E.

Measure more than six top marked frequencies generated form pretest by computer step by step at each frequency. The EUT is rotated 360 degrees, and antenna is raised and lowered from 1 to 4 meter to find the maximum emission levels. The antenna is used with both horizontal and vertical polarization.

Appropriated preamplifier which is made by TRC is used for improving sensitivity and precautions is taken to avoid overloading .The spectrum analyzer's 6dB bandwidth is set to 120 K Hz , and the EUT is measured at quasi-peak mode.

If the emission is close to the frequency band of ambient, the tester will recheck the data and the corrected data will be written in the test data sheet. If the emission is just within the ambient, the data from anechoic will be taken as the final data.

The actual field intensity in decibels referenced to 1 micro volt per meter ($\text{dB}\mu\text{V}/\text{m}$) is determined by algebraically adding the measured reading in $\text{dB}\mu\text{V}$, the antenna factor (dB) and cable loss (dB) at the appropriate frequency.

(1) Band of Frequency: (30M Hz ~ 1G Hz)

$$\text{FI}_a (\text{dB}\mu\text{V}/\text{m}) = \text{FI}_r (\text{dB}\mu\text{V}) - \text{Corrected (dB)}$$

$$\text{Corrected (dB)} = \text{AF(dB)} + \text{CL (dB)} - \text{Amplifier Gain}$$

FI_a : Actual Field Intensity

FI_r : Reading of the Field Intensity

AF : Antenna Factor

CL : Cable Loss

(2) Band of Frequency: (1G Hz ~ 18 G Hz)

$$\text{FI}_a (\text{dB}\mu\text{V}/\text{m}) = \text{FI}_r (\text{dB}\mu\text{V}) + \text{AF (dB)} + \text{CL(dB)}$$

FI_a : Actual Field Intensity

FI_r : Reading of the Field Intensity

AF : Antenna Factor


CL : Cable Loss

5.3 List of Measurement Instruments

| <u>Instrument Name</u> | <u>Model No.</u> | <u>Brand</u> | <u>Serial No.</u> | <u>Calibration Date</u> | |
|--|------------------|--------------|-------------------|-------------------------|-----------|
| | | | | Last time | Next time |
| EMI Receiver | 8546A | H P | 3520A00242 | 10/01/00 | 10/01/01 |
| RF Filter Section | 85460A | H P | 3448A00217 | 10/01/00 | 10/01/01 |
| Bi-log Antenna | CBL6141A | Schaffner | 4151 | 06/28/00 | 06/28/01 |
| Switch/Control Unit (> 30MHz) | 3488A | HP | N/A | 11/20/99 | 11/20/00 |
| Auto Switch Box (> 30MHz) | ASB-01 | TRC | 9904-01 | 11/20/99 | 11/20/00 |
| Spectrum Analyzer | 8564E | HP | US36433002 | 08/03/00 | 08/03/01 |
| Microwave Preamplifier | 83051A | HP | 3232A00347 | 08/04/00 | 08/04/01 |
| Horn Antenna | 3115 | EMCO | 9704 – 5178 | 08/09/00 | 08/09/01 |
| Anechoic Chamber & cable calibrated together | | | | 05/20/00 | 05/20/01 |

The level of confidence of 95%, the uncertainty of measurement of radiated emission is ± 4.96 dB.

5.4 Measurement Configuration

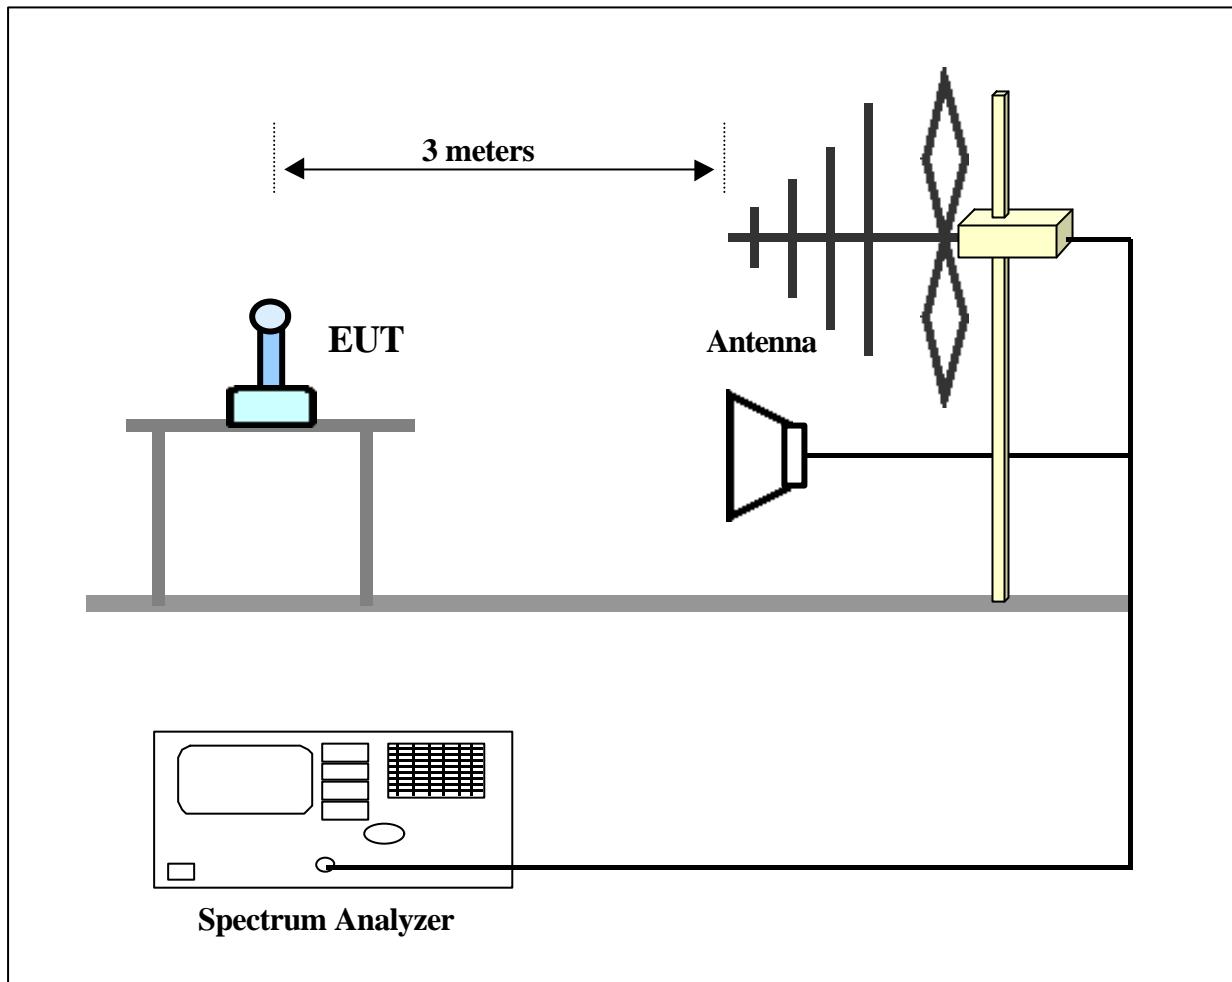



Pic 1 Front View of Test Configuration



Pic 2 Rear View of the Test Configuration

5.5 Measurement Result:

(Test Frequency: 174.600MHz , Horizontal , 30 MHz ~ 1 GHz)

Test Conditions:

Testing room : Temperature : 26 °C Humidity : 73 % RH

Testing site : Temperature : 31 °C Humidity : 75 % RH

| Frequency | Reading Amplitude | Ant. Height | Table | Correction Factors | Corrected Amplitude | Limit | Margin |
|------------------|--------------------------|--------------------|--------------|---------------------------|----------------------------|--------------|---------------|
| MHz | dB μ V | m | degree | dB/m | dB μ V/m | dB μ V/m | dB |

| | | | | | | | |
|---------|-------|------|-----|--------|-------|-------|--------|
| 189.154 | 27.41 | 1.00 | 120 | -12.71 | 40.12 | 84.38 | -44.26 |
| 218.252 | 26.58 | 1.00 | 113 | -15.09 | 41.67 | 84.38 | -44.26 |
| 349.202 | 41.58 | 1.00 | 124 | -18.19 | 59.77 | 84.38 | -24.61 |
| 523.803 | 33.19 | 3.94 | 118 | -21.09 | 54.28 | 84.38 | -30.10 |
| 698.403 | 38.29 | 1.00 | 99 | -25.06 | 63.35 | 84.38 | -21.03 |
| 872.995 | 37.51 | 1.00 | 108 | -26.75 | 64.26 | 84.38 | -20.12 |
| *** | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |

Note:

1. Margin = Amplitude - limit, if margin is minus means under limit.
2. Corrected Amplitude = Reading Amplitude – Correction Factors
3. Correction factor = Antenna factor + (Cable Loss – Amplitude Gain)
 (For example : 30MHz correction Amplitude = 15.5 – (-15.26) = 30.76 dB/m)
4. Attenuation required = $43 + 10 \log (0.092104 \text{ mW}) = 2.64$
 Limit = $87.02 - (2.64) = 84.38$

Measurement Result:

(Test Frequency: 174.600MHz , Horizontal , 1GHz ~ 18GHz)

| Radiated Emission | | | | Correction Factors | Corrected Amplitude (dB μ V/m) | FCC Class B (3 m) | |
|--------------------|-----------------------------|-----------------|----------------|--------------------|---------------------------------------|-------------------------|----------------|
| Frequency (GHz) | Amplitude (dB μ V/m) | Ant. H. (cm) | Table (°) | (dB) | | Limit (dB μ V/m) | Margin (dB) |
| 1.047 | 58.13 | 1.00 | 316 | -8.67 | 49.46 | 84.38 | -34.92 |
| 1.223 | 60.80 | 1.00 | 208 | -8.67 | 52.13 | 84.38 | -32.25 |
| 1.397 | 62.80 | 1.00 | 15 | -8.67 | 54.13 | 84.38 | -30.25 |
| 2.097 | 49.63 | 1.00 | 117 | -8.67 | 40.96 | 84.38 | -43.42 |
| 2.270 | 54.63 | 1.00 | 20 | -8.67 | 45.96 | 84.38 | -38.42 |
| 2.617 | 56.63 | 1.00 | 296 | -8.67 | 47.96 | 84.38 | -36.42 |
| *** | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |

Note:

1. Margin = Corrected - Limit.
2. Peak Amplitude + Correction Factor = Corrected

Radiated Emission Test Result:

(**Test Frequency: 174.600MHz , Vertical , 30MHz ~ 1GHz**)

| Frequency | Reading Amplitude | Ant. Height | Table | Correction Factors | Corrected Amplitude | Limit | Margin |
|------------------|--------------------------|--------------------|--------------|---------------------------|----------------------------|--------------|---------------|
| MHz | dB μ V | m | degree | dB/m | dB μ V/m | dB μ V/m | dB |

| | | | | | | | |
|---------|-------|------|-----|--------|-------|-------|--------|
| 349.204 | 37.85 | 1.00 | 16 | -17.81 | 55.66 | 84.38 | -28.72 |
| 436.501 | 20.47 | 1.00 | 68 | -20.07 | 40.54 | 84.38 | -28.72 |
| 523.804 | 45.31 | 1.00 | 11 | -22.26 | 67.57 | 84.38 | -16.81 |
| 698.402 | 32.80 | 2.44 | 119 | -25.24 | 58.04 | 84.38 | -26.34 |
| 873.000 | 34.53 | 1.00 | 6 | -27.67 | 62.20 | 84.38 | -22.18 |
| *** | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |

Radiated Emission Test Result:
(Test Frequency: 174.600MHz , Vertical , 1GHz ~ 18GHz)

| <i>Radiated Emission</i> | | | | <i>Correction Factors</i> | <i>Corrected Amplitude</i> (dB μ V/m) | <i>FCC Class B</i> (3 m) | |
|---------------------------|------------------------------------|------------------------|-----------------------|---------------------------|--|--------------------------------|-----------------------|
| <i>Frequency</i> (GHz) | <i>Amplitude</i> (dB μ V/m) | <i>Ant. H.</i> (cm) | <i>Table</i> (°) | (dB) | | <i>Limit</i> (dB μ V/m) | <i>Margin</i> (dB) |
| 1.047 | 58.63 | 1.00 | 339 | -8.67 | 49.96 | 84.38 | -34.42 |
| 1.223 | 62.30 | 1.00 | 247 | -8.67 | 53.63 | 84.38 | -30.75 |
| 1.397 | 62.80 | 1.00 | 20 | -8.67 | 54.13 | 84.38 | -30.25 |
| 2.097 | 55.13 | 1.00 | 189 | -8.67 | 46.46 | 84.38 | -37.92 |
| 2.270 | 60.13 | 1.00 | 259 | -8.67 | 51.46 | 84.38 | -32.92 |
| 2.617 | 56.46 | 1.00 | 164 | -8.67 | 47.79 | 84.38 | -36.59 |
| *** | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |

Measurement Result:

(Test Frequency: 190.598MHz , Horizontal , 30MHz ~ 1GHz)

| Frequency | Reading Amplitude | Ant. Height | Table | Correction Factors | Corrected Amplitude | Limit | Margin |
|------------------|--------------------------|--------------------|--------------|---------------------------|----------------------------|--------------|---------------|
| MHz | dB μ V | m | degree | dB/m | dB μ V/m | dB μ V/m | dB |
| 206.480 | 32.85 | 1.00 | 98 | -13.85 | 46.70 | 84.38 | -37.68 |
| 381.197 | 32.77 | 1.00 | 137 | -18.84 | 51.61 | 84.38 | -37.68 |
| 571.799 | 28.22 | 3.94 | 111 | -23.04 | 51.26 | 84.38 | -33.12 |
| 667.094 | 23.99 | 1.00 | 136 | -24.39 | 48.38 | 84.38 | -36.00 |
| 762.395 | 35.68 | 1.00 | 125 | -26.22 | 61.90 | 84.38 | -22.48 |
| 857.702 | 17.87 | 1.00 | 143 | -27.14 | 45.01 | 84.38 | -39.37 |
| 952.994 | 27.46 | 1.00 | 138 | -28.42 | 55.88 | 84.38 | -28.50 |
| *** | | | | | | | |
| | | | | | | | |
| | | | | | | | |

Note:

1. Margin = Amplitude - limit, if margin is minus means under limit.
2. Corrected Amplitude = Reading Amplitude – Correction Factors
3. Correction factor = Antenna factor + (Cable Loss – Amplitude Gain)
(For example : 30MHz correction Amplitude = 15.5 – (–15.26) = 30.76 dB/m)
4. Attenuation required = $43 + 10 \log (0.158226 \text{ mW}) = 4.99$
Limit = $89.37 - (4.99) = 84.38$

Measurement Result:

(Test Frequency: 190.598MHz , Horizontal , 1GHz ~ 18GHz)

| Radiated Emission | | | | Correction Factors | Corrected Amplitude (dB μ V/m) | FCC Class B (3 m) | |
|--------------------|-----------------------------|-----------------|----------------|--------------------|---------------------------------------|-------------------------|----------------|
| Frequency (GHz) | Amplitude (dB μ V/m) | Ant. H. (cm) | Table (°) | (dB) | | Limit (dB μ V/m) | Margin (dB) |
| 1.047 | 59.70 | 1.00 | 84 | -8.67 | 51.03 | 84.38 | -33.35 |
| 1.240 | 53.37 | 1.00 | 126 | -8.67 | 44.70 | 84.38 | -39.68 |
| 1.333 | 51.37 | 1.00 | 289 | -8.67 | 42.70 | 84.38 | -41.68 |
| 1.430 | 57.70 | 1.00 | 331 | -8.67 | 49.03 | 84.38 | -35.35 |
| 1.523 | 52.37 | 1.00 | 209 | -8.67 | 43.70 | 84.38 | -40.68 |
| 1.620 | 49.54 | 1.00 | 11 | -8.67 | 40.87 | 84.38 | -43.51 |
| 1.907 | 56.70 | 1.00 | 246 | -8.67 | 48.03 | 84.38 | -36.35 |
| 2.097 | 56.70 | 1.00 | 109 | -8.67 | 48.03 | 84.38 | -36.35 |
| 2.287 | 61.37 | 1.00 | 34 | -8.67 | 52.70 | 84.38 | -31.68 |
| 2.477 | 49.20 | 1.00 | 309 | -8.67 | 40.53 | 84.38 | -43.85 |
| *** | | | | | | | |
| | | | | | | | |

Radiated Emission Test Result:
(Test Frequency: 190.598MHz , Vertical , 30MHz ~ 1GHz)

| Frequency | Reading Amplitude | Ant. Height | Table | Correction Factors | Corrected Amplitude | Limit | Margin |
|------------------|--------------------------|--------------------|--------------|---------------------------|----------------------------|--------------|---------------|
| MHz | dB μ V | m | degree | dB/m | dB μ V/m | dB μ V/m | dB |
| 381.212 | 26.48 | 1.00 | 69 | -18.50 | 44.98 | 84.38 | -39.40 |
| 476.502 | 26.58 | 1.00 | 76 | -21.27 | 47.85 | 84.38 | -39.40 |
| 571.802 | 29.05 | 1.00 | 61 | -23.51 | 52.56 | 84.38 | -31.82 |
| 667.105 | 21.64 | 1.00 | 34 | -24.37 | 46.01 | 84.38 | -38.37 |
| 762.400 | 32.12 | 1.00 | 142 | -26.06 | 58.18 | 84.38 | -26.20 |
| 857.701 | 13.41 | 1.00 | 76 | -27.51 | 40.92 | 84.38 | -43.46 |
| 953.005 | 24.34 | 2.45 | 34 | -30.08 | 54.42 | 84.38 | -29.96 |
| *** | | | | | | | |
| | | | | | | | |
| | | | | | | | |

Radiated Emission Test Result:
(Test Frequency: 190.598MHz , Vertical , 1GHz ~ 18GHz)

| Radiated Emission | | | | Correction Factors | Corrected Amplitude (dB μ V/m) | FCC Class B (3 m) | |
|---------------------------|------------------------------------|------------------------|-----------------------|---------------------------|--|--------------------------------|-----------------------|
| Frequency (GHz) | Amplitude (dB μ V/m) | Ant. H. (cm) | Table (°) | (dB) | | Limit (dB μ V/m) | Margin (dB) |
| 1.047 | 60.60 | 1.00 | 258 | -8.67 | 51.93 | 84.38 | -32.45 |
| 1.240 | 56.70 | 1.00 | 31 | -8.67 | 48.03 | 84.38 | -36.35 |
| 1.333 | 57.20 | 1.00 | 289 | -8.67 | 48.53 | 84.38 | -35.85 |
| 1.430 | 61.54 | 1.00 | 106 | -8.67 | 52.87 | 84.38 | -31.51 |
| 1.523 | 59.04 | 1.00 | 177 | -8.67 | 50.37 | 84.38 | -34.01 |
| 1.620 | 58.70 | 1.00 | 201 | -8.67 | 50.03 | 84.38 | -34.35 |
| 1.907 | 58.70 | 1.00 | 216 | -8.67 | 50.03 | 84.38 | -34.35 |
| 2.097 | 60.20 | 1.00 | 315 | -8.67 | 51.53 | 84.38 | -32.85 |
| 2.287 | 59.54 | 1.00 | 32 | -8.67 | 50.87 | 84.38 | -33.51 |
| 2.477 | 56.20 | 1.00 | 248 | -8.67 | 47.53 | 84.38 | -36.85 |
| *** | | | | | | | |
| | | | | | | | |

Measurement Result:

(Test Frequency: 213.200MHz , Horizontal , 30MHz ~ 1GHz)

| Frequency | Reading Amplitude | Ant. Height | Table | Correction Factors | Corrected Amplitude | Limit | Margin |
|------------------|--------------------------|--------------------|--------------|---------------------------|----------------------------|--------------|---------------|
| MHz | dB μ V | m | degree | dB/m | dB μ V/m | dB μ V/m | dB |
| 159.905 | 33.04 | 2.44 | 105 | -14.27 | 47.31 | 84.38 | -37.07 |
| 266.503 | 34.28 | 1.00 | 115 | -15.64 | 49.92 | 84.38 | -37.07 |
| 319.803 | 36.53 | 1.00 | 124 | -17.17 | 53.70 | 84.38 | -30.68 |
| 426.399 | 46.28 | 2.44 | 111 | -19.89 | 66.17 | 84.38 | -18.21 |
| 639.601 | 35.34 | 1.00 | 79 | -24.00 | 59.34 | 84.38 | -25.04 |
| 746.199 | 18.42 | 1.00 | 152 | -26.42 | 44.84 | 84.38 | -39.54 |
| 852.800 | 41.46 | 1.00 | 147 | -27.22 | 68.68 | 84.38 | -15.70 |
| *** | | | | | | | |
| | | | | | | | |
| | | | | | | | |

Note:

1. Margin = Amplitude – limit, if margin is minus means under limit.
2. Corrected Amplitude = Reading Amplitude – Correction Factors
3. Correction factor = Antenna factor + (Cable Loss – Amplitude Gain)
(For example : 30MHz correction Amplitude = 15.5 – (-15.26) = 30.76 dB/m)
4. Attenuation required = $43 + 10 \log (0.731606 \text{ mW}) = 11.64$
Limit = $96.02 - (11.64) = 84.38$

Measurement Result:

(Test Frequency: 213.200MHz , Horizontal , 1GHz ~ 18GHz)

| Radiated Emission | | | | Correction Factors | Corrected Amplitude (dB μ V/m) | FCC Class B (3 m) | |
|--------------------|-----------------------------|-----------------|----------------|--------------------|---------------------------------------|-------------------------|----------------|
| Frequency (GHz) | Amplitude (dB μ V/m) | Ant. H. (cm) | Table (°) | (dB) | | Limit (dB μ V/m) | Margin (dB) |
| 1.067 | 67.46 | 1.00 | 59 | -8.67 | 58.79 | 84.38 | -25.59 |
| 1.280 | 61.30 | 1.00 | 130 | -8.67 | 52.63 | 84.38 | -31.75 |
| 2.130 | 51.30 | 1.00 | 251 | -8.67 | 42.63 | 84.38 | -41.75 |
| 2.237 | 53.96 | 1.00 | 307 | -8.67 | 45.29 | 84.38 | -39.09 |
| 2.343 | 59.93 | 1.00 | 239 | -8.67 | 51.26 | 84.38 | -33.12 |
| *** | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |

Radiated Emission Test Result:

(Test Frequency: 213.200MHz , Vertical , 30MHz ~ 1GHz)

| <i>Frequency</i> | <i>Reading Amplitude</i> | <i>Ant. Height</i> | <i>Table</i> | <i>Correction Factors</i> | <i>Corrected Amplitude</i> | <i>Limit</i> | <i>Margin</i> |
|------------------|--------------------------|--------------------|--------------|---------------------------|----------------------------|--------------|---------------|
| MHz | dB μ V | m | degree | dB/m | dB μ V/m | dB μ V/m | dB |

| | | | | | | | |
|---------|-------|------|-----|--------|-------|-------|--------|
| 159.905 | 27.24 | 1.00 | 123 | -13.42 | 40.66 | 84.38 | -43.72 |
| 319.803 | 28.77 | 1.00 | 45 | -17.88 | 46.65 | 84.38 | -43.72 |
| 426.397 | 47.57 | 1.00 | 145 | -19.86 | 67.43 | 84.38 | -16.95 |
| 479.700 | 24.11 | 1.00 | 2 | -21.32 | 45.43 | 84.38 | -38.95 |
| 532.997 | 25.59 | 1.00 | 149 | -22.55 | 48.14 | 84.38 | -36.24 |
| 639.601 | 34.23 | 1.00 | 106 | -23.88 | 58.11 | 84.38 | -26.27 |
| 852.800 | 40.01 | 1.00 | 146 | -27.55 | 67.56 | 84.38 | -16.82 |
| *** | | | | | | | |
| | | | | | | | |
| | | | | | | | |

Radiated Emission Test Result:
(Test Frequency: 213.200MHz , Vertical , 1GHz ~ 18GHz)

| <i>Radiated Emission</i> | | | | <i>Correction Factors</i> | <i>Corrected Amplitude</i> (dB μ V/m) | <i>FCC Class B</i> (3 m) | |
|---------------------------|------------------------------------|------------------------|-----------------------|---------------------------|--|--------------------------------|-----------------------|
| <i>Frequency</i> (GHz) | <i>Amplitude</i> (dB μ V/m) | <i>Ant. H.</i> (cm) | <i>Table</i> (°) | (dB) | | <i>Limit</i> (dB μ V/m) | <i>Margin</i> (dB) |
| 1.067 | 67.82 | 1.00 | 259 | -8.67 | 59.15 | 84.38 | -25.23 |
| 1.280 | 63.13 | 1.00 | 10 | -8.67 | 54.46 | 84.38 | -29.92 |
| 2.130 | 58.96 | 1.00 | 121 | -8.67 | 50.29 | 84.38 | -34.09 |
| 2.237 | 56.30 | 1.00 | 38 | -8.67 | 47.63 | 84.38 | -36.75 |
| 2.343 | 59.80 | 1.00 | 229 | -8.67 | 51.13 | 84.38 | -33.25 |
| *** | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |

Chapter 6 Frequency Stability Tolerance Measurement

6.1 Rules and Specification Limits

2.1055

74.861(e)(4): The frequency tolerance of the transmitter shall be 0.005 percent.


6.2 Measurement Condition & Setup with Temperature Variation

1. Place the EUT in the chamber, powered in its normal operation.
2. Set the temperature of the chamber -30 degree Centigrade. Allow the equipment to stabilize at that temperature.
3. Measured the carrier frequency using preamplifier and frequency counter.
4. Repeated procedures 1 to 3 from -20 to 50 degree Centigrade at internals of 10 degree.

6.3 List of Measurement Instruments with Temperature Variation List of test Instrument :

| <u>Instrument Name</u> | <u>Model No.</u> | <u>Brand</u> | <u>Remark</u> |
|------------------------|------------------|--------------------|---------------|
| Spectrum Analyzer | 8591A | H P | 1.8GHz |
| Temperature Chamber | THS-MV2 | King Son | |
| Near field Probe | 7405-901 | EMCO | |
| Power Supply | GPR-6030 | Good Will | |
| Auto Transformer | Powerstat | Supprior Elec. Co. | |

6.4 Measurement Configuration of Temperature Variation Test:

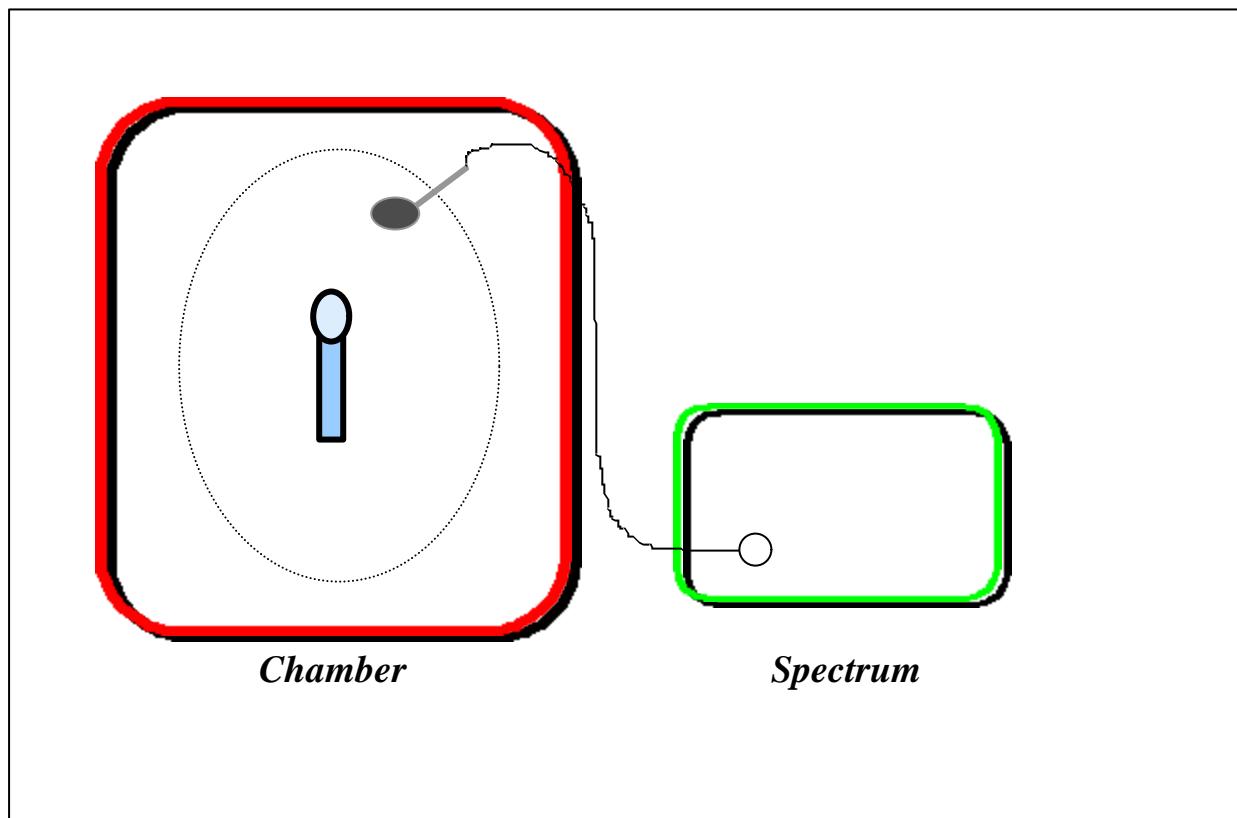


6.5 Measurement Result with Temperature Variation

A plot and table is presented which illustrates compliance with the rule where the center frequency is 190.598MHz.

Temperature Variation Table

| Temperature (Centigrade) | Frequency (MHz) | Tolerance (MHz) |
|---------------------------------------|------------------------------|------------------------------|
| -30 | 190.600697 | 190.588470 ~ 190.607529 |
| -25 | 190.601135 | 190.588470 ~ 190.607529 |
| -20 | 190.601598 | 190.588470 ~ 190.607529 |
| -15 | 190.601903 | 190.588470 ~ 190.607529 |
| -10 | 190.602213 | 190.588470 ~ 190.607529 |
| -5 | 190.602534 | 190.588470 ~ 190.607529 |
| 0 | 190.602634 | 190.588470 ~ 190.607529 |
| 5 | 190.602607 | 190.588470 ~ 190.607529 |
| 10 | 190.602354 | 190.588470 ~ 190.607529 |
| 10 | 190.601945 | 190.588470 ~ 190.607529 |
| 20 | 190.601345 | 190.588470 ~ 190.607529 |
| 25 | 190.600856 | 190.588470 ~ 190.607529 |
| 30 | 190.599902 | 190.588470 ~ 190.607529 |
| 35 | 190.599823 | 190.588470 ~ 190.607529 |
| 40 | 190.599641 | 190.588470 ~ 190.607529 |
| 45 | 190.599384 | 190.588470 ~ 190.607529 |
| 50 | 190.598954 | 190.588470 ~ 190.607529 |

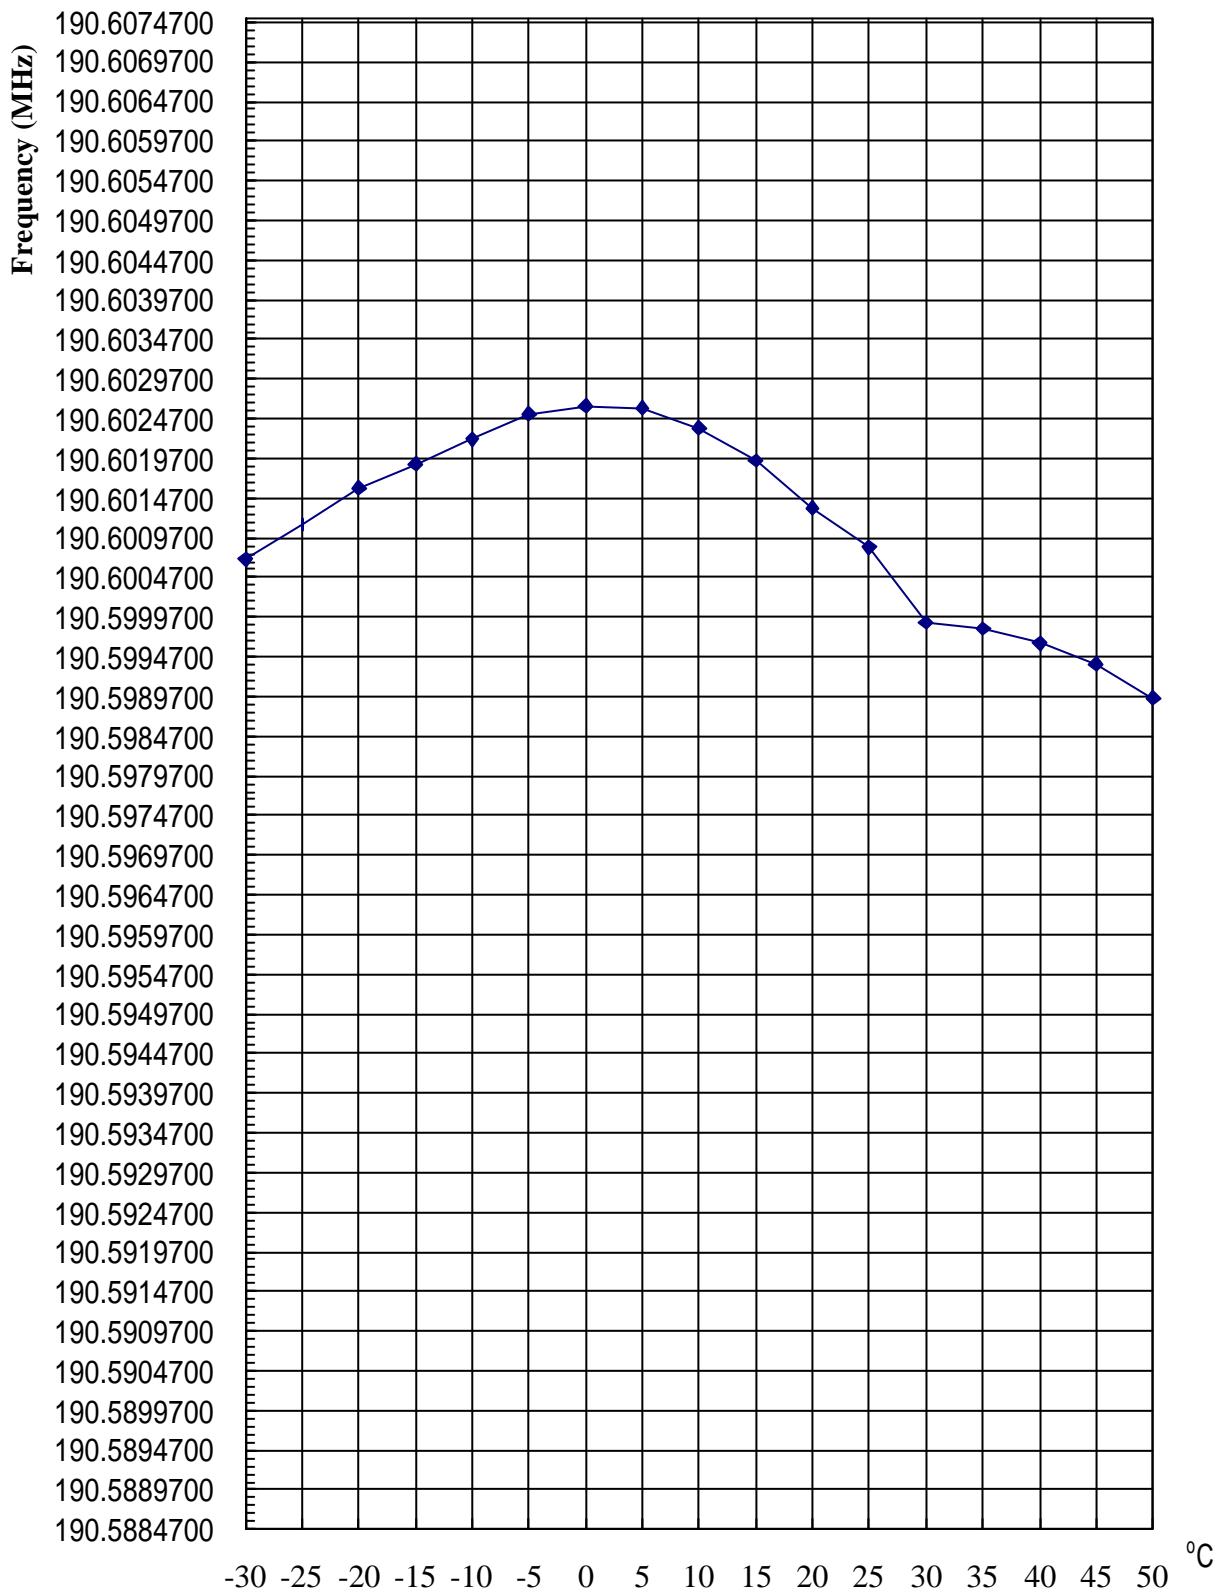Temperatuer Variation Vs. Frequency Chart


6.6 Measurement Condition & Setup with Voltage Variation

1. Attached the power line of the power supply to the battery position of the EUT.
2. Tuned the output power level to battery end point, 85 %, 100%, 115% of the normal operation power of EUT.
3. Recorded the frequency with a frequency counter.

6.7 List of Test Instrument :

| Instrument Name | Model No. | Brand | Remark |
|---------------------|-----------|--------------------|--------|
| Spectrum Analyzer | 8591A | H P | 1.8GHz |
| Temperature Chamber | THS-MV2 | King Son | |
| Near field Probe | 7405-901 | EMCO | |
| Power Supply | GPR-6030 | Good Will | |
| Auto Transformer | Powerstat | Supprior Elec. Co. | |

6.8 Configuration of Voltage Variation Test :

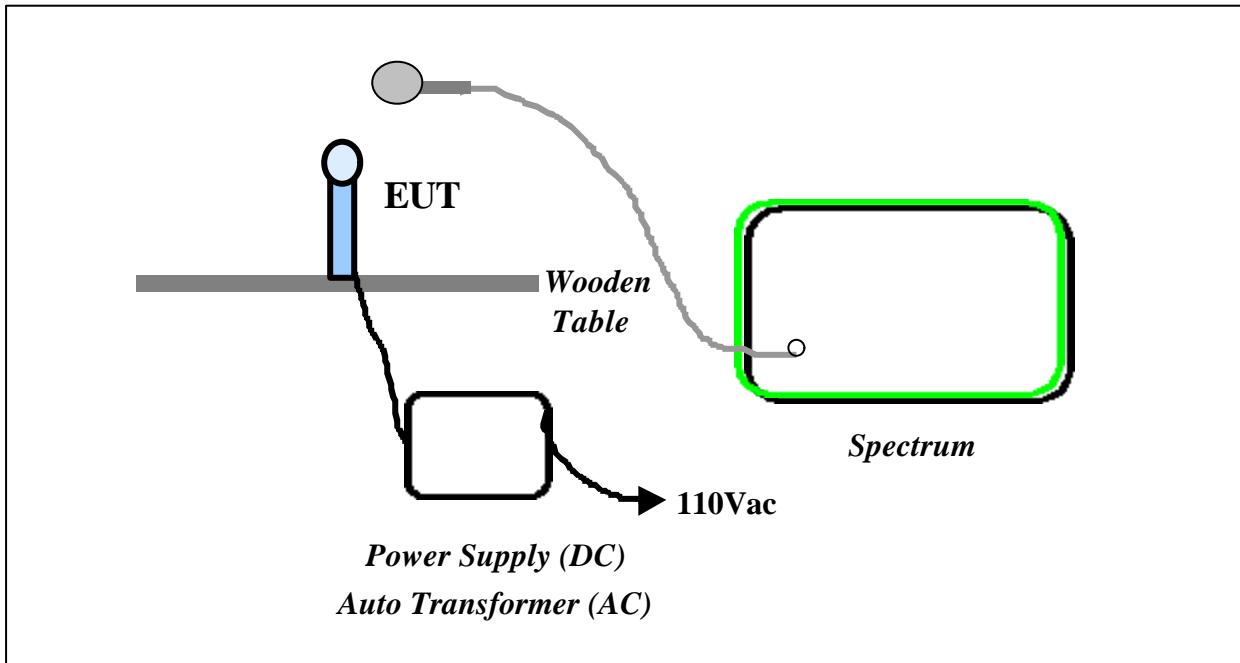

6.9 Measurement Result with Voltage Variation

Frequency Stability of Voltage Variation Measurement Table

| <i>Supply Voltage (Volt)</i> | <i>Frequency (MHz)</i> | <i>Tolerance (MHz)</i> |
|------------------------------------|------------------------------|------------------------------|
| 2.55 (85%) | 190.599948 | 190.588470 ~ 190.607529 |
| 3 (100%) | 190.599942 | 190.588470 ~ 190.607529 |
| 3.45 (115%) | 190.599946 | 190.588470 ~ 190.607529 |
| Endpoint-Voltage: 1.70V | | |

Voltage Variation Vs. Frequency Chart

