

TEST RESULTS (Cont.)


Measurement

Setting	Instrument Value	Instrument Value
Start Frequency	5.15000 GHz	5.19000 GHz
Stop Frequency	5.23000 GHz	5.27000 GHz
Span	80.000 MHz	80.000 MHz
RBW	300.000 kHz	300.000 kHz
VBW	1.000 MHz	1.000 MHz
Sweep Points	533	533
Sweep time	31.621 μ s	31.621 μ s
Reference Level	10.000 dBm	0.000 dBm
Attenuation	30.000 dB	20.000 dB
Detector	Max Peak	Max Peak
Sweep Count	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweep type	FFT	FFT
Preamp	off	off
Stable mode	Trace	Trace
Stable value	0.30 dB	0.30 dB
Run	96 / max. 150	119 / max. 150
Stable	5 / 5	5 / 5
Max Stable Difference	0.00 dB	0.00dB


TEST RESULTS (Cont.):

OCCUPIED BANDWIDTH

Lowest Channel

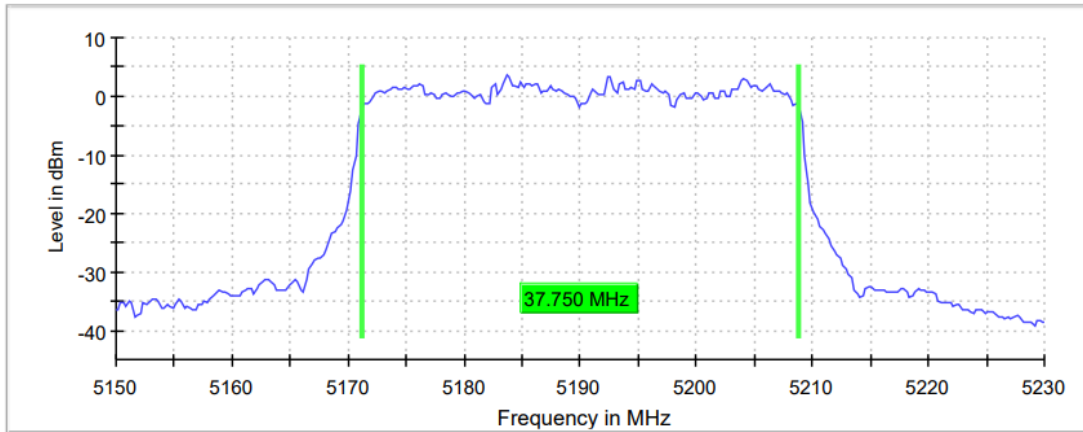

Highest Channel

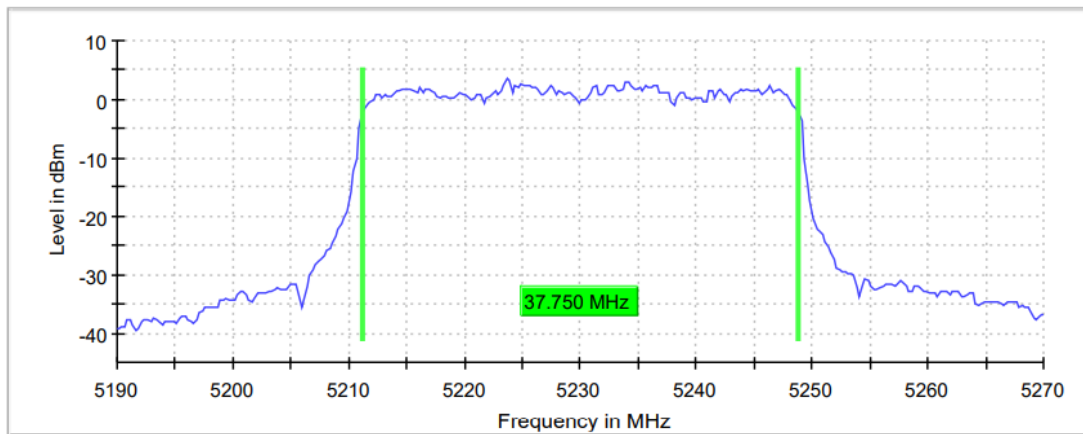

TEST RESULTS (Cont.)

Measurement

Setting	Instrument Value	Instrument Value
Start Frequency	5.15000 GHz	5.19000 GHz
Stop Frequency	5.23000 GHz	5.27000 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	500.000 kHz
VBW	2.000 MHz	2.000 MHz
Sweep Points	320	320
Sweep time	18.906 μ s	18.906 μ s
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	20.000 dB
Detector	Max Peak	Max Peak
Sweep Count	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweep type	FFT	FFT
Preamp	Off	off
Stable mode	Trace	Trace
Stable value	0.30 dB	0.30 dB
Run	75 / max. 150	71 / max. 150
Stable	5 / 5	5 / 5
Max Stable Difference	0.10 dB	0.23 dB


TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#04 (ax Mode SISO Radio B)
TEST RESULTS:	PASS

Bandwidth: 40 MHz


	Lowest frequency	Highest frequency
	5190 MHz	5230 MHz
26dB bandwidth (MHz)	40.375	40.675
Occupied bandwidth (MHz)	37.750	37.750

26 dB Bandwidth

Lowest Channel

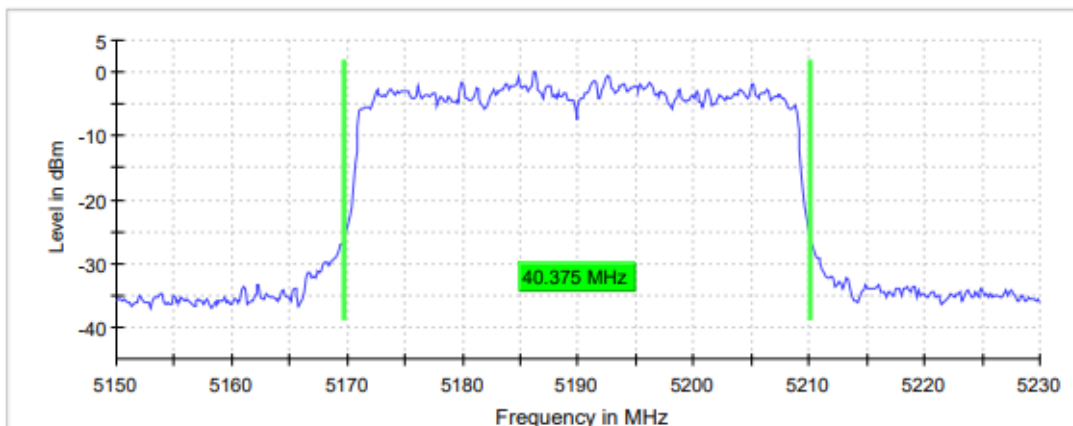

Highest Channel

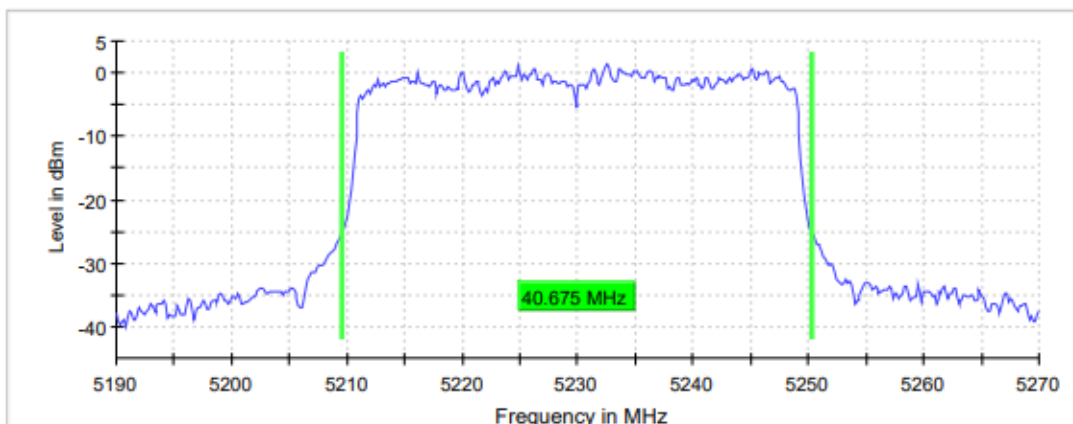

TEST RESULTS (Cont.)


Measurement

Setting	Instrument Value	Instrument Value
Start Frequency	5.15000 GHz	5.19000 GHz
Stop Frequency	5.23000 GHz	5.27000 GHz
Span	80.000 MHz	80.000 MHz
RBW	300.000 kHz	300.000 kHz
VBW	1.000 MHz	1.000 MHz
Sweep Points	533	533
Sweep time	31.621 μ s	31.621 μ s
Reference Level	10.000 dBm	0.000 dBm
Attenuation	30.000 dB	20.000 dB
Detector	Max Peak	Max Peak
Sweep Count	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweep type	FFT	FFT
Preamp	off	off
Stable mode	Trace	Trace
Stable value	0.30 dB	0.30 dB
Run	102 / max. 150	118 / max. 150
Stable	5 / 5	5 / 5
Max Stable Difference	0.00 dB	0.07 dB


TEST RESULTS (Cont.):

OCCUPIED BANDWIDTH

Lowest Channel

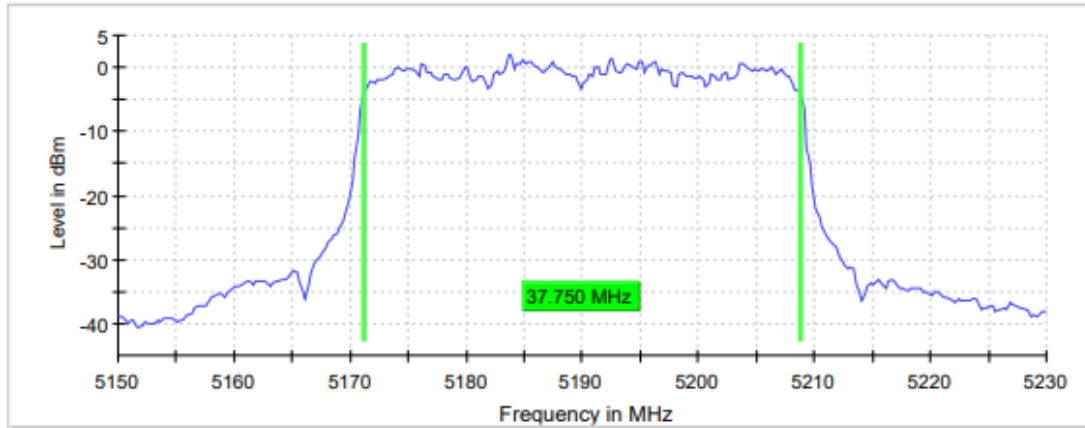

Highest Channel

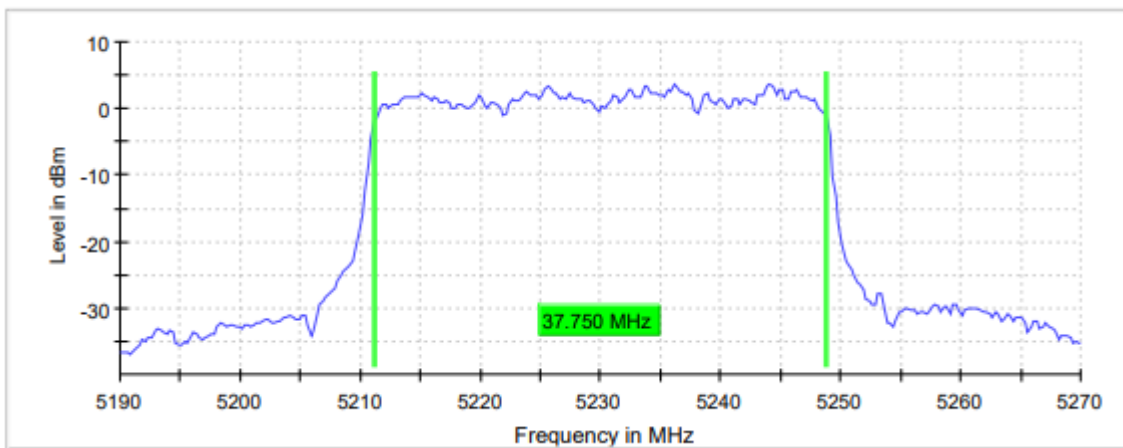

TEST RESULTS (Cont.)

Measurement

Setting	Instrument Value	Instrument Value
Start Frequency	5.15000 GHz	5.19000 GHz
Stop Frequency	5.23000 GHz	5.27000 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	500.000 kHz
VBW	2.000 MHz	2.000 MHz
Sweep Points	320	320
Sweep time	18.906 μ s	18.906 μ s
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	20.000 dB
Detector	Max Peak	Max Peak
Sweep Count	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweep type	FFT	FFT
Preamp	Off	off
Stable mode	Trace	Trace
Stable value	0.30 dB	0.30 dB
Run	121 / max. 150	100 / max. 150
Stable	5 / 5	5 / 5
Max Stable Difference	0.00 dB	0.00 dB


TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#04 (ax Mode MIMO Radio A+B)
TEST RESULTS:	PASS

Bandwidth: 40 MHz


	Lowest frequency	Highest frequency
	5190 MHz	5230 MHz
26dB bandwidth (MHz)	40.525	40.375
Occupied bandwidth (MHz)	37.750	37.750

26 dB Bandwidth

Lowest Channel

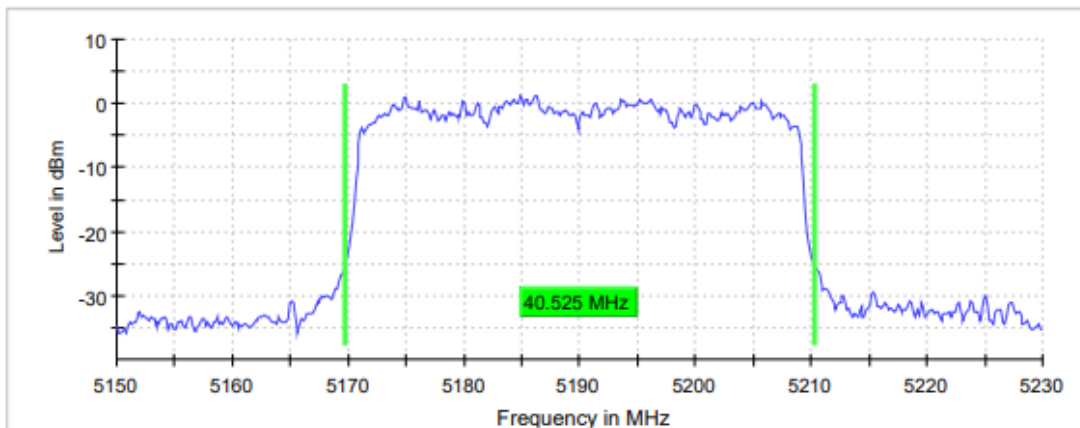

Highest Channel

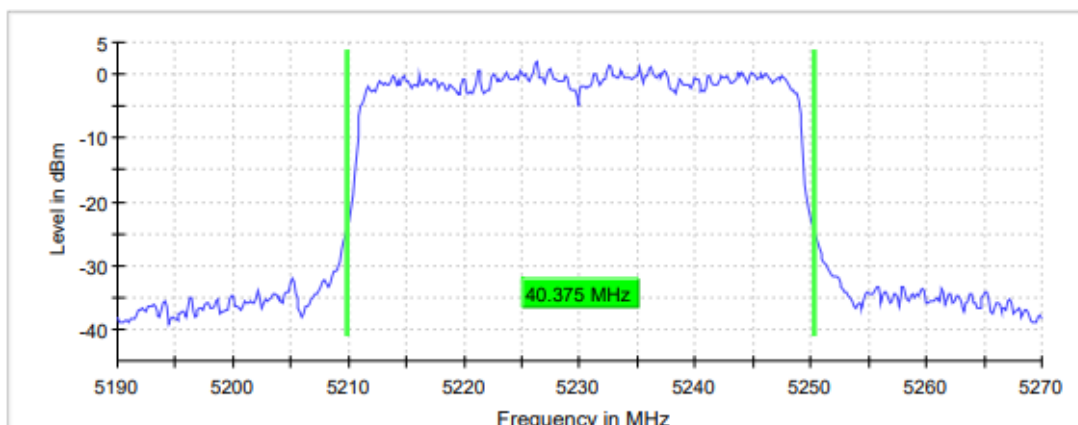

TEST RESULTS (Cont.)


Measurement

Setting	Instrument Value	Instrument Value
Start Frequency	5.15000 GHz	5.19000 GHz
Stop Frequency	5.23000 GHz	5.27000 GHz
Span	80.000 MHz	80.000 MHz
RBW	300.000 kHz	300.000 kHz
VBW	1.000 MHz	1.000 MHz
Sweep Points	533	533
Sweep time	31.621 μ s	31.621 μ s
Reference Level	10.000 dBm	0.000 dBm
Attenuation	30.000 dB	20.000 dB
Detector	Max Peak	Max Peak
Sweep Count	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweep type	FFT	FFT
Preamp	off	off
Stable mode	Trace	Trace
Stable value	0.30 dB	0.30 dB
Run	93 / max. 150	83 / max. 150
Stable	5 / 5	5 / 5
Max Stable Difference	0.00 dB	0.14 dB


TEST RESULTS (Cont.):

OCCUPIED BANDWIDTH

Lowest Channel

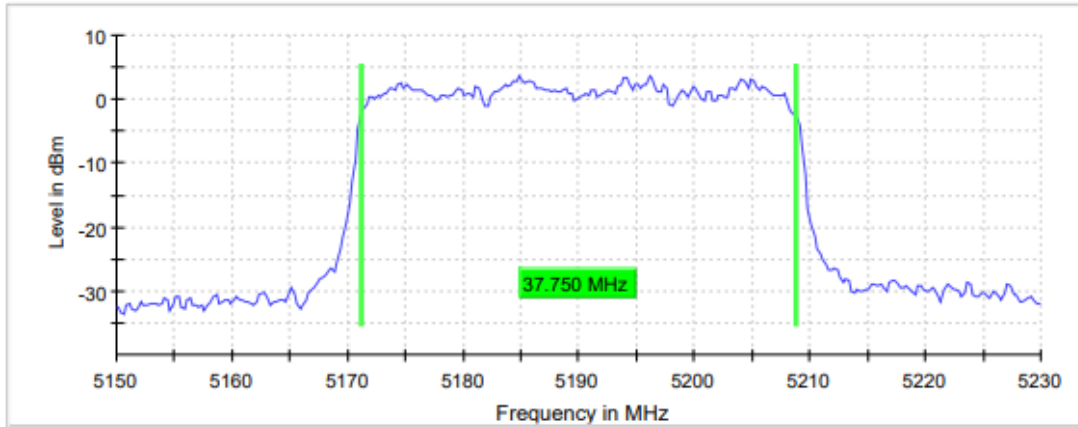

Highest Channel

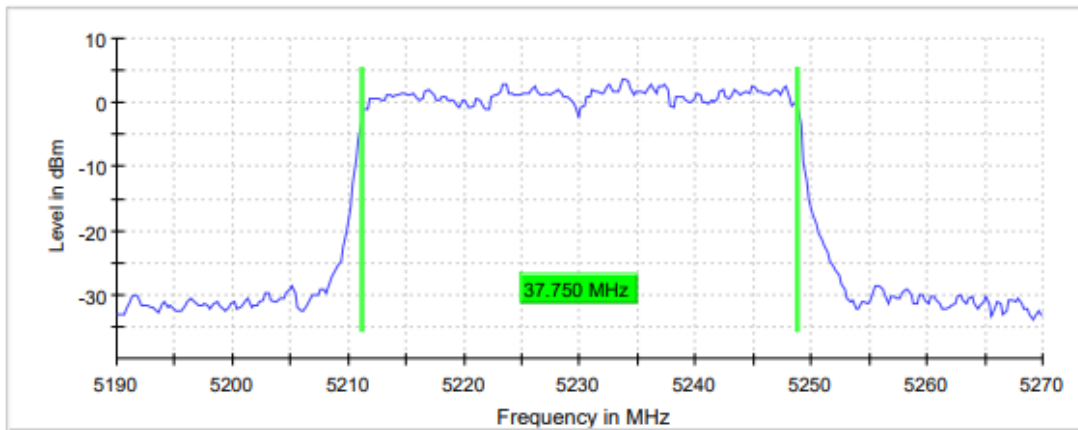

TEST RESULTS (Cont.)

Measurement


Setting	Instrument Value	Instrument Value
Start Frequency	5.15000 GHz	5.19000 GHz
Stop Frequency	5.23000 GHz	5.27000 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	500.000 kHz
VBW	2.000 MHz	2.000 MHz
Sweep Points	320	320
Sweep time	18.906 μ s	18.906 μ s
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB
Detector	Max Peak	Max Peak
Sweep Count	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweep type	FFT	FFT
Preamp	Off	off
Stable mode	Trace	Trace
Stable value	0.30 dB	0.30 dB
Run	71 / max. 150	35 / max. 150
Stable	5 / 5	5 / 5
Max Stable Difference	0.07 dB	0.00 dB

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#03 (ac Mode SISO Radio A)
TEST RESULTS:	PASS

Bandwidth: 80 MHz

	Lowest frequency
	5210 MHz
26dB bandwidth (MHz)	82.500
Occupied bandwidth (MHz)	76.500

**26 dB Bandwidth
 Lowest Channel**

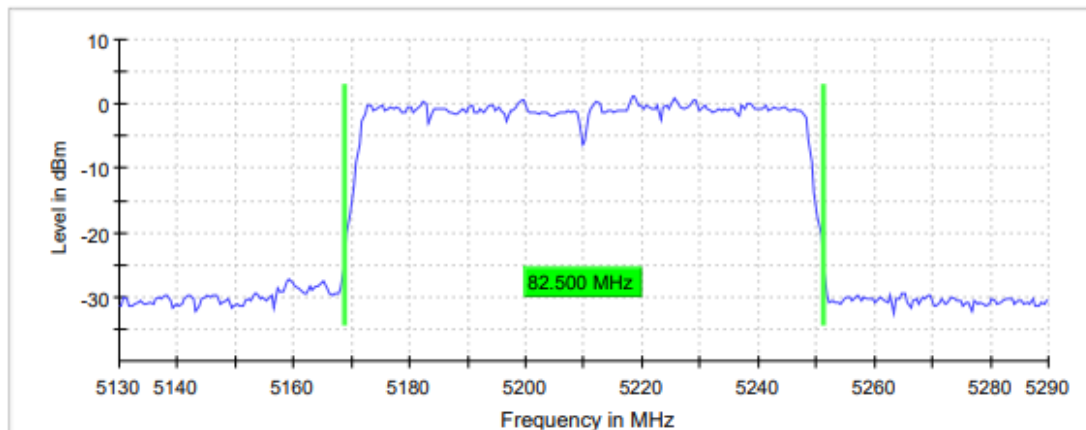

TEST RESULTS (Cont.)


Measurement

Setting	Instrument Value
Start Frequency	5.13000 GHz
Stop Frequency	5.29000 GHz
Span	160.000 MHz
RBW	1.000 MHz
VBW	3.000 MHz
Sweep Points	320
Sweep time	22.875 μ s
Reference Level	10.000 dBm
Attenuation	30.000 dB
Detector	Max Peak
Sweep Count	200
Filter	3 dB
Trace Mode	Max Hold
Sweep type	FFT
Preamp	off
Stable mode	Trace
Stable value	0.30 dB
Run	65 / max. 150
Stable	5 / 5
Max Stable Difference	0.00 dB

TEST RESULTS (Cont.):

OCCUPIED BANDWIDTH

Lowest Channel

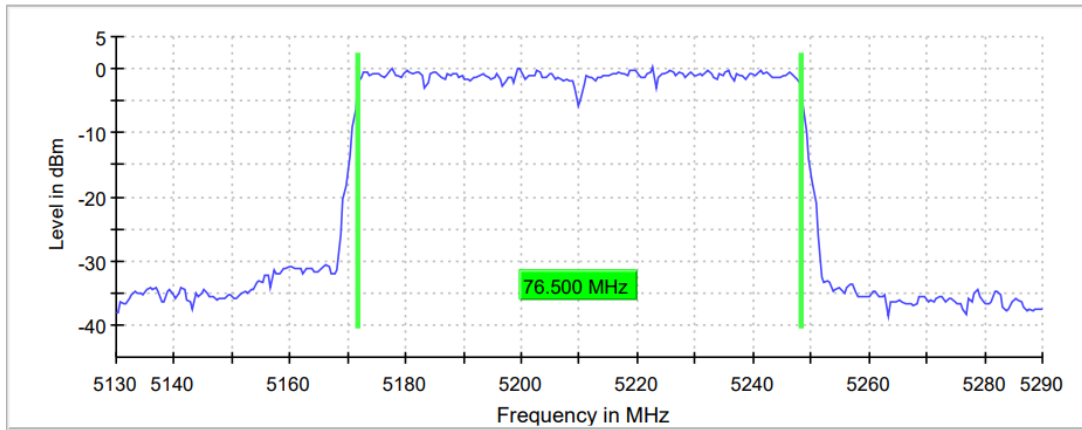

Measurement


Setting	Instrument Value
Start Frequency	5.13000 GHz
Stop Frequency	5.29000 GHz
Span	160.000 MHz
RBW	1.000 MHz
VBW	3.000 MHz
Sweep Points	320
Sweep time	22.875 μ s
Reference Level	0.000 dBm
Attenuation	20.000 dB
Detector	Max Peak
Sweep Count	200
Filter	3 dB
Trace Mode	Max Hold
Sweep type	FFT
Preamp	Off
Stable mode	Trace
Stable value	0.30 dB
Run	49 / max. 150
Stable	5 / 5
Max Stable Difference	0.09 dB

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#03 (ac Mode SISO Radio B)
TEST RESULTS:	PASS

Bandwidth: 80 MHz

	Lowest frequency
	5210 MHz
26dB bandwidth (MHz)	83.500
Occupied bandwidth (MHz)	76.500

**26 dB Bandwidth
 Lowest Channel**

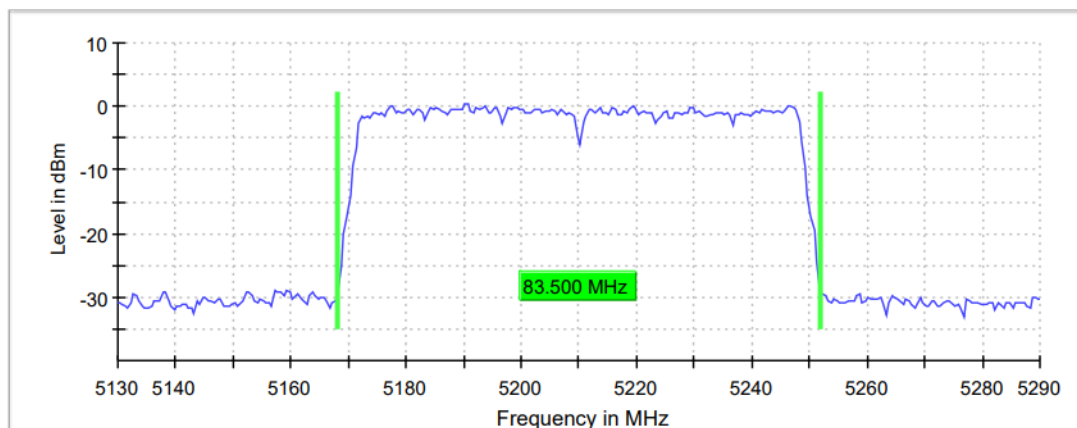

TEST RESULTS (Cont.)


Measurement

Setting	Instrument Value
Start Frequency	5.13000 GHz
Stop Frequency	5.29000 GHz
Span	160.000 MHz
RBW	1.000 MHz
VBW	3.000 MHz
Sweep Points	320
Sweep time	22.875 μ s
Reference Level	10.000 dBm
Attenuation	30.000 dB
Detector	Max Peak
Sweep Count	200
Filter	3 dB
Trace Mode	Max Hold
Sweep type	FFT
Preamp	off
Stable mode	Trace
Stable value	0.30 dB
Run	59 / max. 150
Stable	5 / 5
Max Stable Difference	0.11 dB

TEST RESULTS (Cont.):

OCCUPIED BANDWIDTH

Lowest Channel

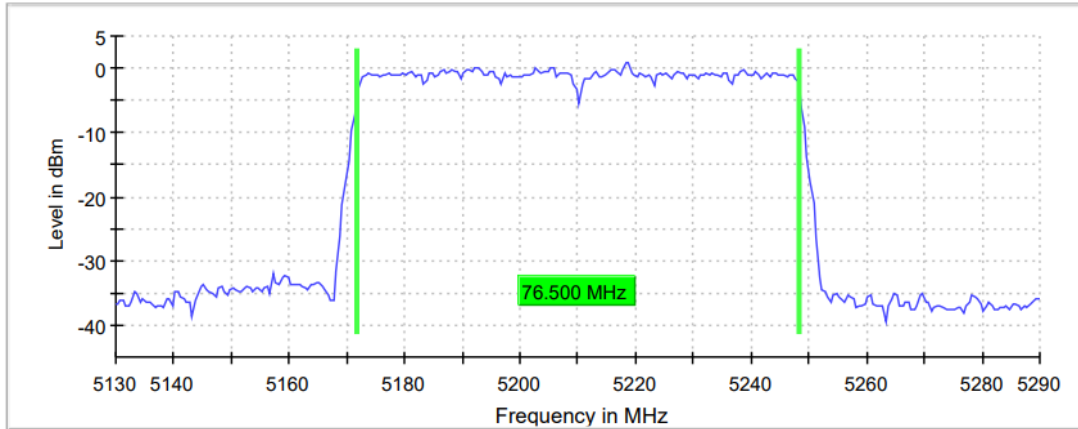

Measurement


Setting	Instrument Value
Start Frequency	5.13000 GHz
Stop Frequency	5.29000 GHz
Span	160.000 MHz
RBW	1.000 MHz
VBW	3.000 MHz
Sweep Points	320
Sweep time	22.875 μ s
Reference Level	0.000 dBm
Attenuation	20.000 dB
Detector	Max Peak
Sweep Count	200
Filter	3 dB
Trace Mode	Max Hold
Sweep type	FFT
Preamp	Off
Stable mode	Trace
Stable value	0.30 dB
Run	65 / max. 150
Stable	5 / 5
Max Stable Difference	0.00 dB

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#03 (ac Mode MIMO Radio A+B)
TEST RESULTS:	PASS

Bandwidth: 80 MHz

	Lowest frequency 5210 MHz
26dB bandwidth (MHz)	83.000
Occupied bandwidth (MHz)	76.500

**26 dB Bandwidth
 Lowest Channel**

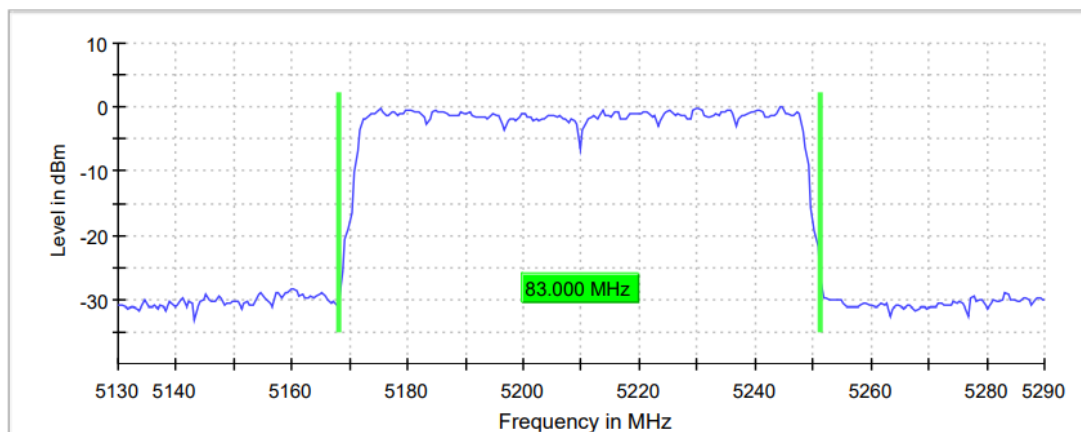


TEST RESULTS (Cont.)

Measurement

Setting	Instrument Value
Start Frequency	5.13000 GHz
Stop Frequency	5.29000 GHz
Span	160.000 MHz
RBW	1.000 MHz
VBW	3.000 MHz
Sweep Points	320
Sweep time	22.875 μ s
Reference Level	10.000 dBm
Attenuation	30.000 dB
Detector	Max Peak
Sweep Count	200
Filter	3 dB
Trace Mode	Max Hold
Sweep type	FFT
Preamp	off
Stable mode	Trace
Stable value	0.30 dB
Run	96/ max. 150
Stable	5 / 5
Max Stable Difference	0.05 dB

TEST RESULTS (Cont.):	OCCUPIED BANDWIDTH
------------------------------	---------------------------

Lowest Channel

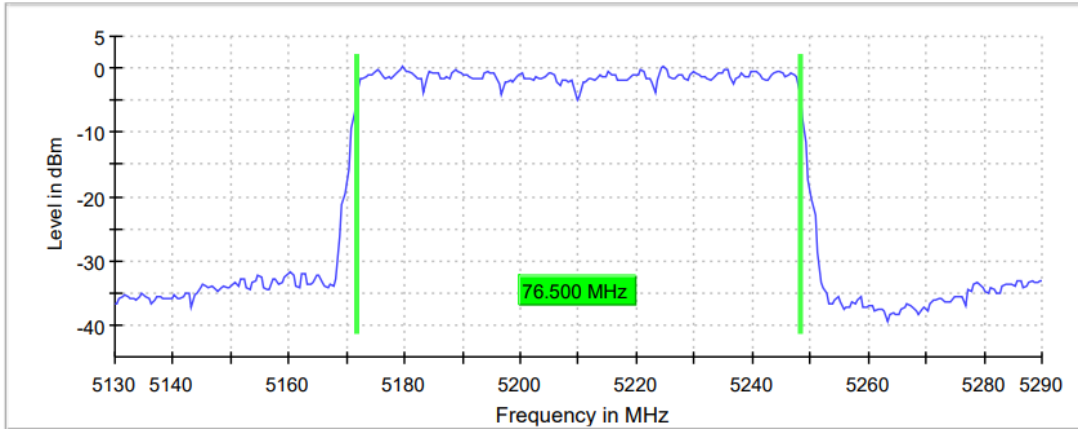

Measurement


Setting	Instrument Value
Start Frequency	5.13000 GHz
Stop Frequency	5.29000 GHz
Span	160.000 MHz
RBW	1.000 MHz
VBW	3.000 MHz
Sweep Points	320
Sweep time	22.875 μ s
Reference Level	0.000 dBm
Attenuation	20.000 dB
Detector	Max Peak
Sweep Count	200
Filter	3 dB
Trace Mode	Max Hold
Sweep type	FFT
Preamp	Off
Stable mode	Trace
Stable value	0.30 dB
Run	77 / max. 150
Stable	5 / 5
Max Stable Difference	0.03 dB

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#03 (ax Mode SISO Radio A)
TEST RESULTS:	PASS

Bandwidth: 80 MHz

	Lowest frequency 5210 MHz
26dB bandwidth (MHz)	81.500
Occupied bandwidth (MHz)	77.500

**26 dB Bandwidth
 Lowest Channel**

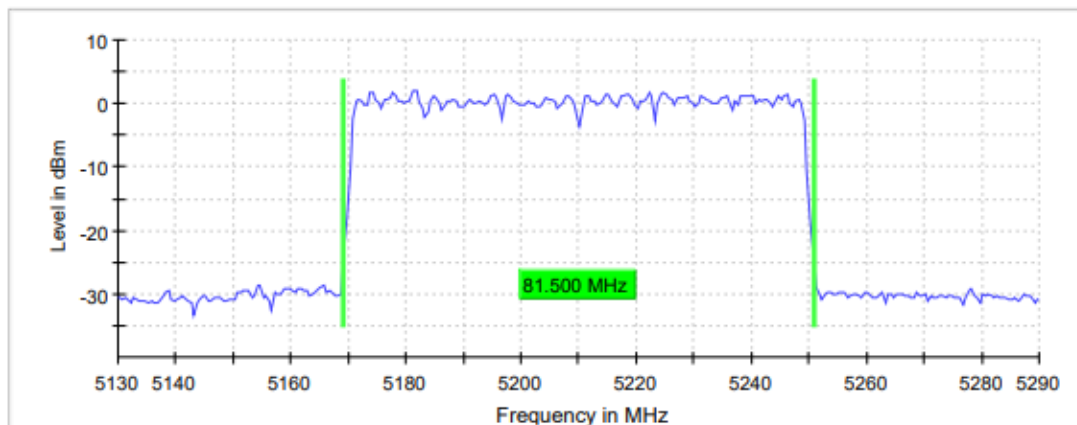

TEST RESULTS (Cont.)


Measurement

Setting	Instrument Value
Start Frequency	5.13000 GHz
Stop Frequency	5.29000 GHz
Span	160.000 MHz
RBW	1.000 MHz
VBW	3.000 MHz
Sweep Points	320
Sweep time	22.875 μ s
Reference Level	10.000 dBm
Attenuation	30.000 dB
Detector	Max Peak
Sweep Count	200
Filter	3 dB
Trace Mode	Max Hold
Sweep type	FFT
Preamp	off
Stable mode	Trace
Stable value	0.30 dB
Run	120 / max. 150
Stable	5 / 5
Max Stable Difference	0.00 dB

TEST RESULTS (Cont.):

OCCUPIED BANDWIDTH

Lowest Channel

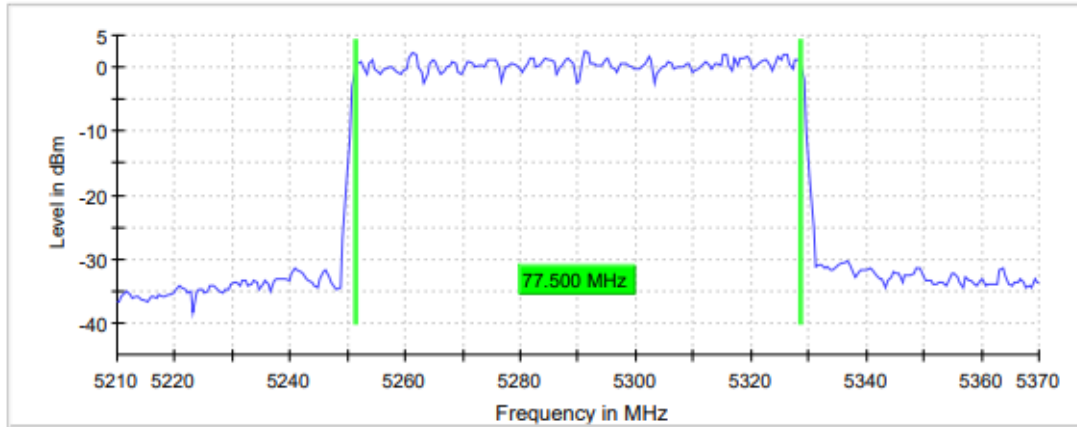

Measurement


Setting	Instrument Value
Start Frequency	5.13000 GHz
Stop Frequency	5.29000 GHz
Span	160.000 MHz
RBW	1.000 MHz
VBW	3.000 MHz
Sweep Points	320
Sweep time	22.875 μ s
Reference Level	0.000 dBm
Attenuation	20.000 dB
Detector	Max Peak
Sweep Count	200
Filter	3 dB
Trace Mode	Max Hold
Sweep type	FFT
Preamp	Off
Stable mode	Trace
Stable value	0.30 dB
Run	78 / max. 150
Stable	5 / 5
Max Stable Difference	0.08 dB

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#04 (ax Mode SISO Radio B)
TEST RESULTS:	PASS

Bandwidth: 80 MHz

	Lowest frequency
	5210 MHz
26dB bandwidth (MHz)	81.500
Occupied bandwidth (MHz)	76.500

**26 dB Bandwidth
 Lowest Channel**

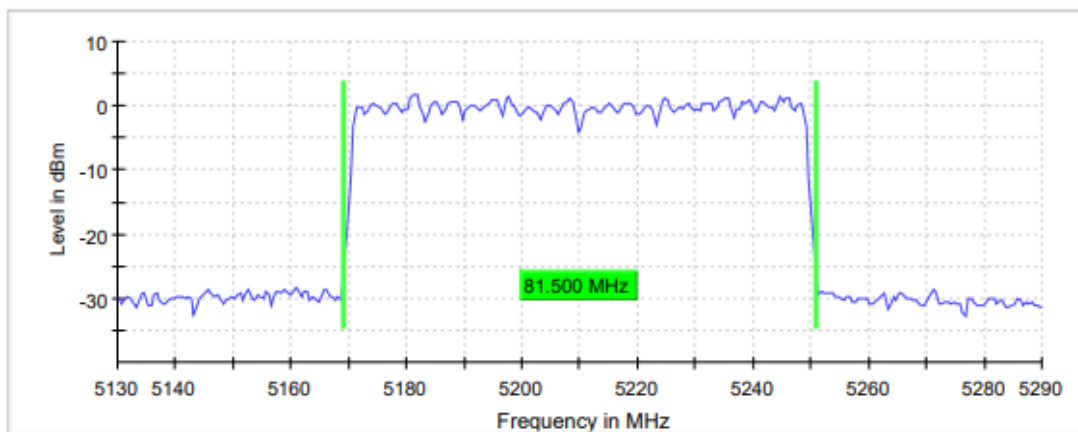

TEST RESULTS (Cont.)


Measurement

Setting	Instrument Value
Start Frequency	5.13000 GHz
Stop Frequency	5.29000 GHz
Span	160.000 MHz
RBW	1.000 MHz
VBW	3.000 MHz
Sweep Points	320
Sweep time	22.875 μ s
Reference Level	10.000 dBm
Attenuation	30.000 dB
Detector	Max Peak
Sweep Count	200
Filter	3 dB
Trace Mode	Max Hold
Sweep type	FFT
Preamp	off
Stable mode	Trace
Stable value	0.30 dB
Run	77 / max. 150
Stable	5 / 5
Max Stable Difference	0.11 dB

TEST RESULTS (Cont.):

OCCUPIED BANDWIDTH

Lowest Channel

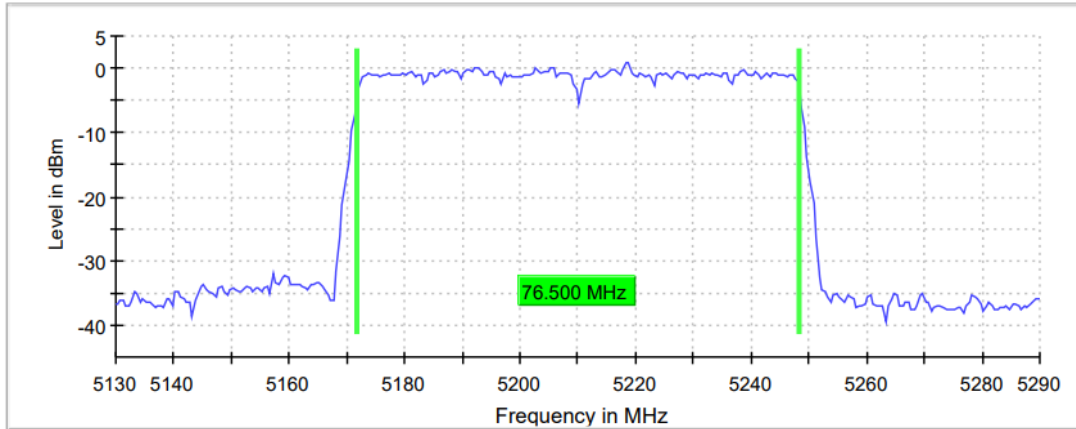

Measurement


Setting	Instrument Value
Start Frequency	5.13000 GHz
Stop Frequency	5.29000 GHz
Span	160.000 MHz
RBW	1.000 MHz
VBW	3.000 MHz
Sweep Points	320
Sweep time	22.875 μ s
Reference Level	0.000 dBm
Attenuation	20.000 dB
Detector	Max Peak
Sweep Count	200
Filter	3 dB
Trace Mode	Max Hold
Sweep type	FFT
Preamp	Off
Stable mode	Trace
Stable value	0.30 dB
Run	121 / max. 150
Stable	5 / 5
Max Stable Difference	0.00 dB

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#04 (ax Mode MIMO Radio A+B)
TEST RESULTS:	PASS

Bandwidth: 80 MHz

	Lowest frequency 5210 MHz
26dB bandwidth (MHz)	81.500
Occupied bandwidth (MHz)	78.200

**26 dB Bandwidth
 Lowest Channel**

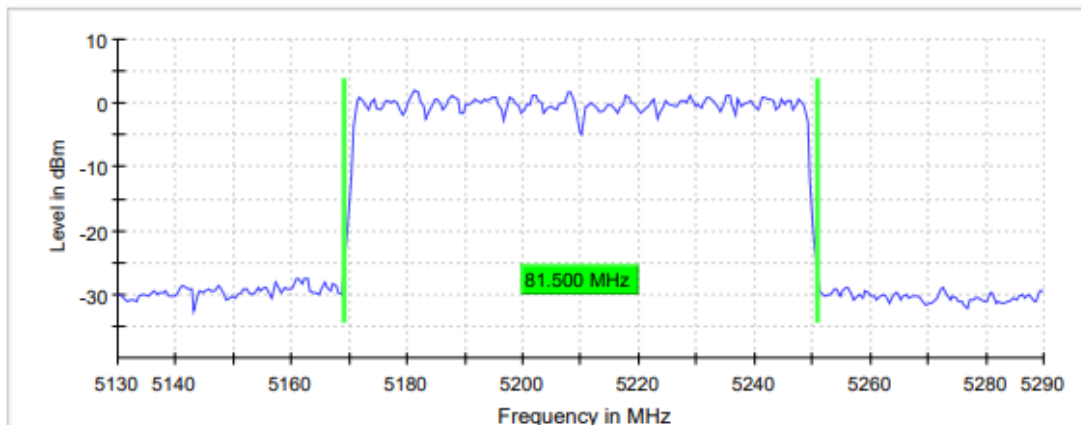

TEST RESULTS (Cont.)


Measurement

Setting	Instrument Value
Start Frequency	5.13000 GHz
Stop Frequency	5.29000 GHz
Span	160.000 MHz
RBW	1.000 MHz
VBW	3.000 MHz
Sweep Points	320
Sweep time	22.875 μ s
Reference Level	10.000 dBm
Attenuation	30.000 dB
Detector	Max Peak
Sweep Count	200
Filter	3 dB
Trace Mode	Max Hold
Sweep type	FFT
Preamp	off
Stable mode	Trace
Stable value	0.30 dB
Run	103/ max. 150
Stable	5 / 5
Max Stable Difference	0.17 dB

TEST RESULTS (Cont.):

OCCUPIED BANDWIDTH

Lowest Channel

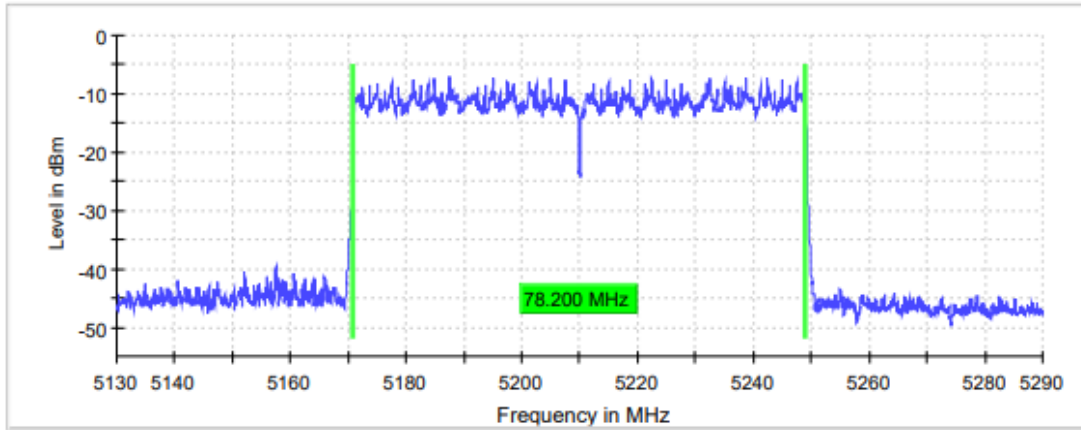

Measurement

Setting	Instrument Value
Start Frequency	5.13000 GHz
Stop Frequency	5.29000 GHz
Span	160.000 MHz
RBW	1.000 MHz
VBW	3.000 MHz
Sweep Points	320
Sweep time	189.453 μ s
Reference Level	0.000 dBm
Attenuation	20.000 dB
Detector	Max Peak
Sweep Count	200
Filter	3 dB
Trace Mode	Max Hold
Sweep type	FFT
Preamp	Off
Stable mode	Trace
Stable value	0.30 dB
Run	114 / max. 150
Stable	5 / 5
Max Stable Difference	0.00 dB


TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#05 (ac Mode Beam forming)
TEST RESULTS:	PASS

Bandwidth: 20 MHz


	Lowest frequency	Middle frequency	Highest frequency
	5180 MHz	5200 MHz	5240 MHz
26dB bandwidth (MHz)	19.600	19.900	19.600
Occupied bandwidth (MHz)	17.600	17.700	17.700

26 dB Bandwidth:

Lowest Channel

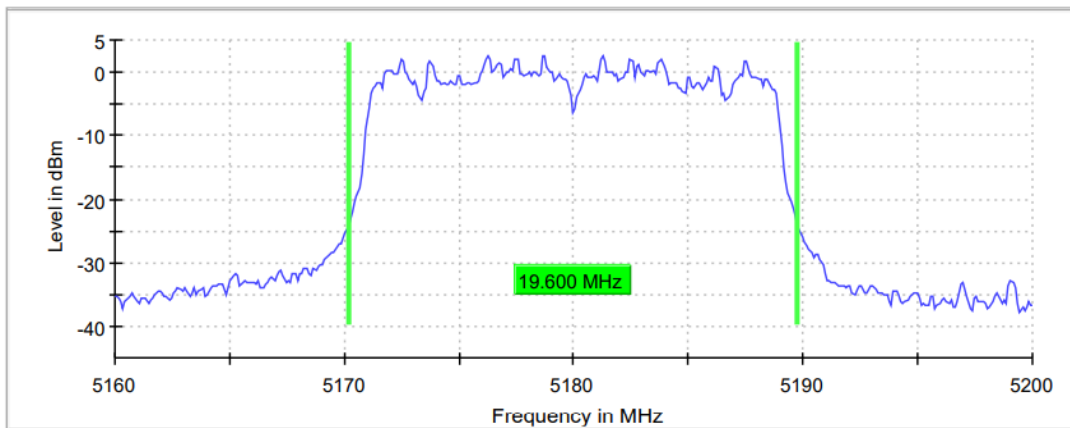


Middle Channel

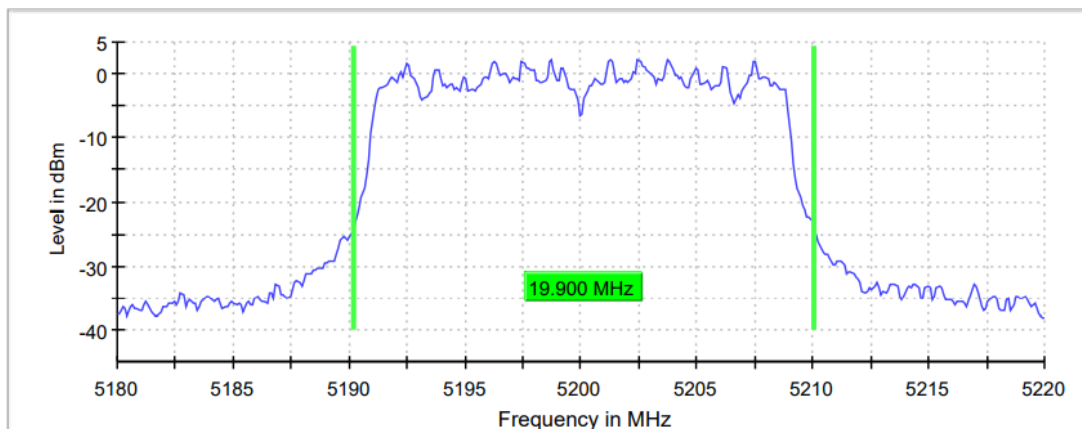

TEST RESULTS (Cont.)

Highest Channel

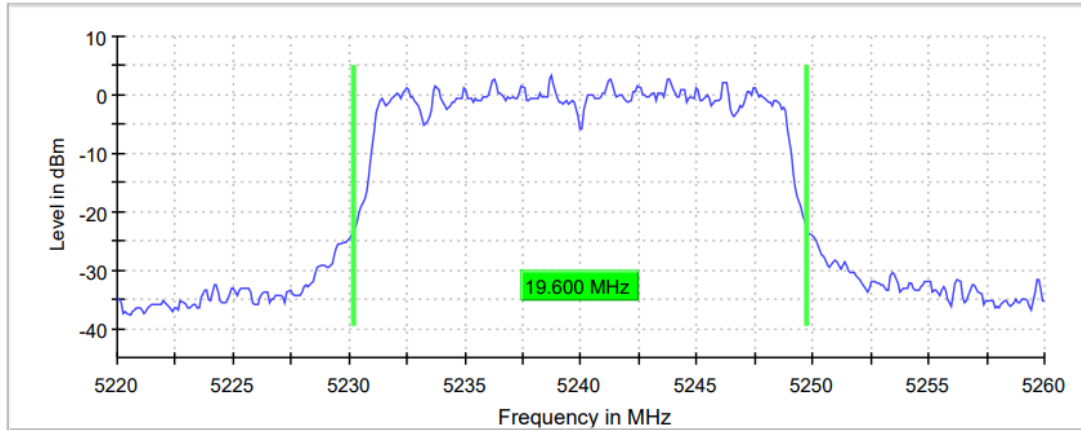


Measurement

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	5.16000 GHz	5.18000 GHz	5.22000 GHz
Stop Frequency	5.20000 GHz	5.22000 GHz	5.26000 GHz
Span	40.000 MHz	40.000 MHz	40.000 MHz
RBW	200.000 kHz	200.000 kHz	200.000 kHz
VBW	1.000 MHz	1.000 MHz	1.000 MHz
Sweep Points	400	400	400
Sweep time	28.477 μ s	28.477 μ s	28.477 μ s
Reference Level	10.000 dBm	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB	30.000 dB
Detector	Max Peak	Max Peak	Max Peak
Sweep Count	200	200	200
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamp	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.30 dB	0.30 dB	0.30 dB
Run	109 / max. 150	71 / max. 150	84 / max. 150
Stable	5 / 5	5 / 5	5 / 5
Max Stable Difference	0.00 dB	0.09 dB	0.27 dB


TEST RESULTS (Cont.):

OCCUPIED BANDWIDTH


Lowest Channel

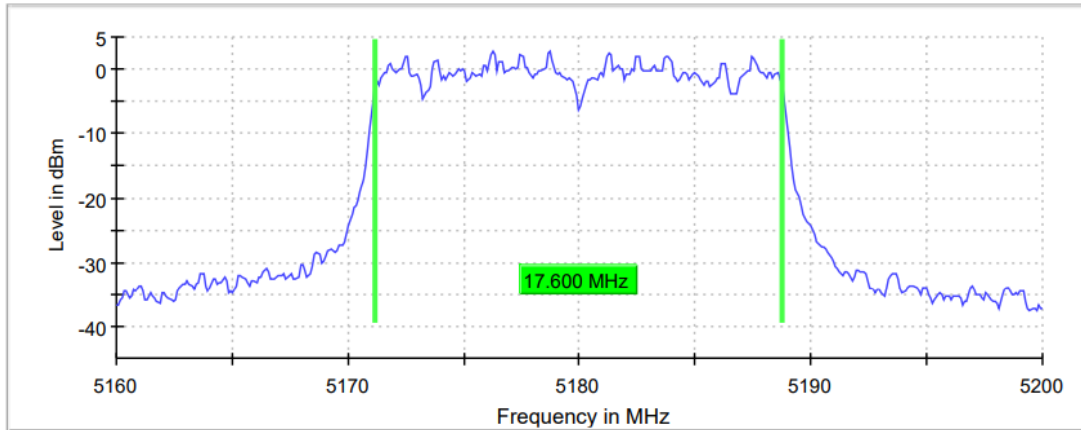

Middle Channel

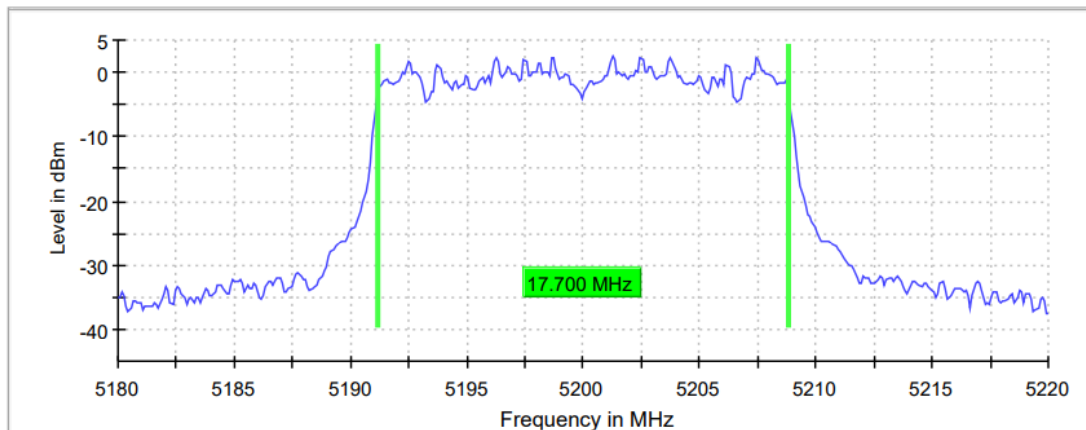

Highest Channel

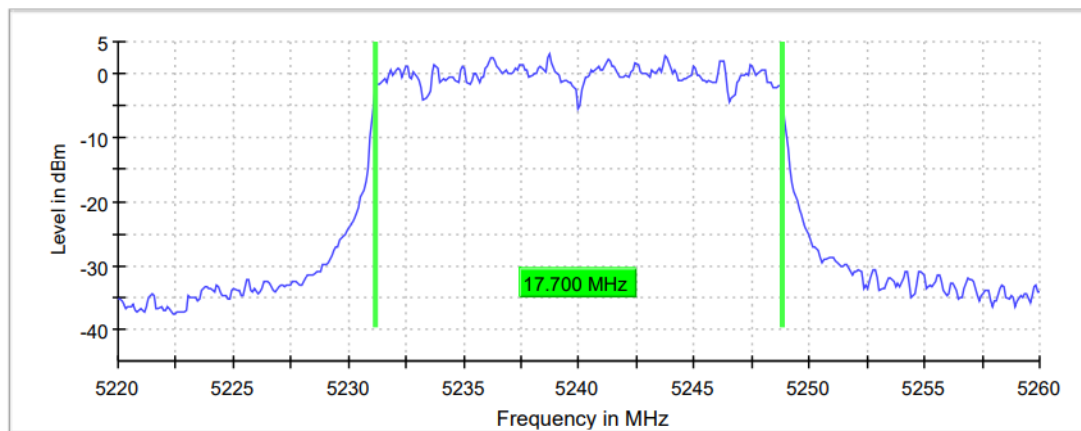

TEST RESULTS (Cont.)

Measurement

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	5.16000 GHz	5.18000 GHz	5.22000 GHz
Stop Frequency	5.20000 GHz	5.22000 GHz	5.26000 GHz
Span	40.000 MHz	40.000 MHz	40.000 MHz
RBW	200.000 kHz	200.000 kHz	200.000 kHz
VBW	1.000 MHz	1.000 MHz	1.000 MHz
Sweep Points	400	400	400
Sweep time	28.477 μ s	28.477 μ s	28.477 μ s
Reference Level	10.000 dBm	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	30.000 dB	30.000 dB
Detector	Max Peak	Max Peak	Max Peak
Sweep Count	200	200	200
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamp	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.30 dB	0.30 dB	0.30 dB
Run	126 / max. 150	108 / max. 150	126 / max. 150
Stable	5 / 5	5 / 5	5 / 5
Max Stable Difference	0.00 dB	0.02 dB	0.00 dB


TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#05 (ac Mode Beam forming)
TEST RESULTS:	PASS

Bandwidth: 40 MHz


	Lowest frequency 5190 MHz	Highest frequency 5230 MHz
26dB bandwidth (MHz)	39.775	36.625
Occupied bandwidth (MHz)	37.500	37.250

26 dB Bandwidth

Lowest Channel

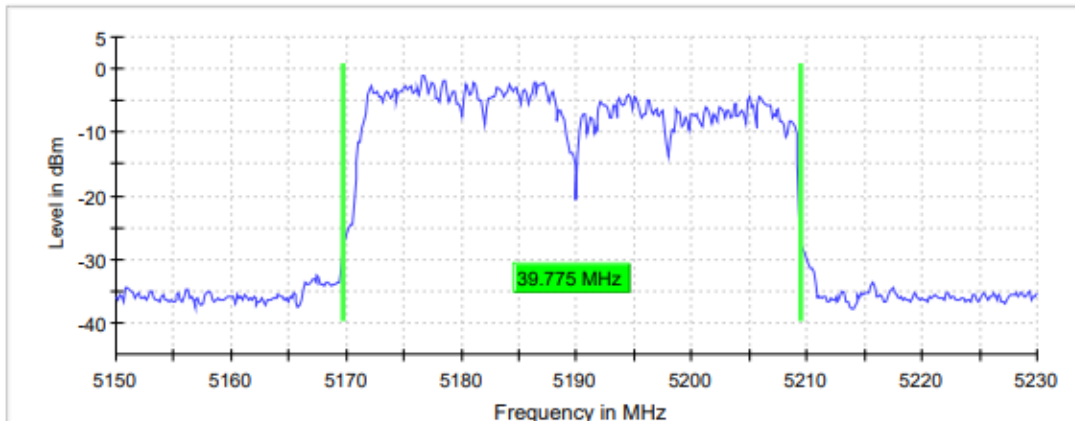

Highest Channel

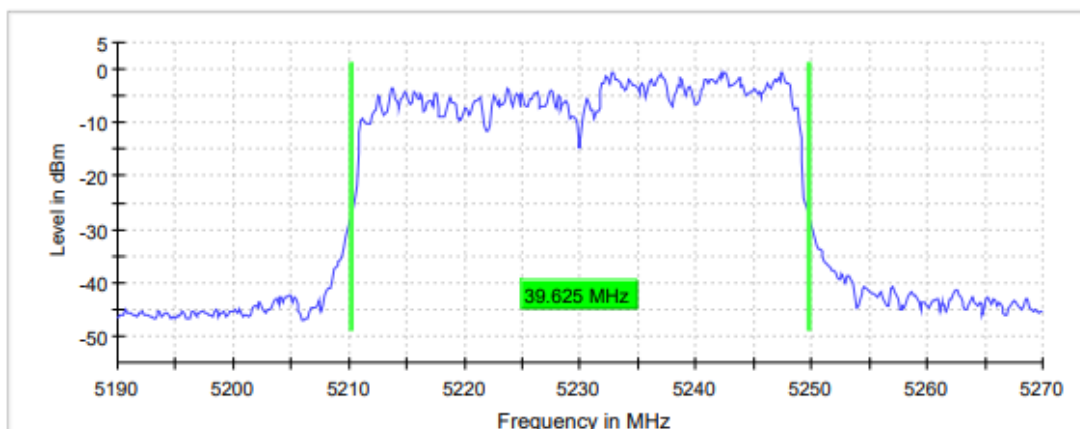

TEST RESULTS (Cont.)


Measurement

Setting	Instrument Value	Instrument Value
Start Frequency	5.15000 GHz	5.19000 GHz
Stop Frequency	5.23000 GHz	5.27000 GHz
Span	80.000 MHz	80.000 MHz
RBW	300.000 kHz	300.000 kHz
VBW	1.000 MHz	1.000 MHz
Sweep Points	533	533
Sweep time	31.621 μ s	31.621 μ s
Reference Level	10.000 dBm	0.000 dBm
Attenuation	30.000 dB	20.000 dB
Detector	Max Peak	Max Peak
Sweep Count	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweep type	FFT	FFT
Preamp	off	off
Stable mode	Trace	Trace
Stable value	0.30 dB	0.30 dB
Run	63 / max. 150	76 / max. 150
Stable	5 / 5	5 / 5
Max Stable Difference	0.13 dB	0.00dB


TEST RESULTS (Cont.):

OCCUPIED BANDWIDTH

Lowest Channel

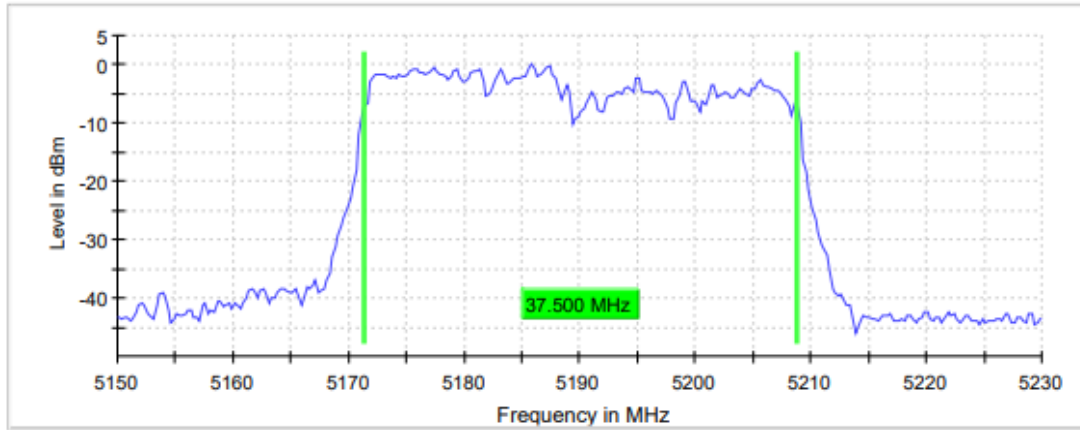

Highest Channel

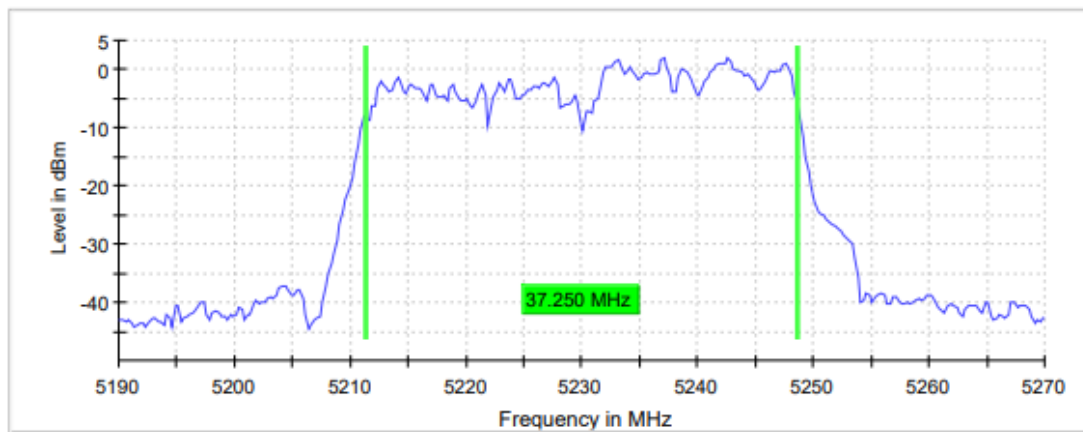

TEST RESULTS (Cont.)

Measurement

Setting	Instrument Value	Instrument Value
Start Frequency	5.15000 GHz	5.19000 GHz
Stop Frequency	5.23000 GHz	5.27000 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	500.000 kHz
VBW	2.000 MHz	2.000 MHz
Sweep Points	320	320
Sweep time	18.906 μ s	18.906 μ s
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	20.000 dB
Detector	Max Peak	Max Peak
Sweep Count	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweep type	FFT	FFT
Preamp	Off	off
Stable mode	Trace	Trace
Stable value	0.30 dB	0.30 dB
Run	52 / max. 150	106 / max. 150
Stable	5 / 5	5 / 5
Max Stable Difference	0.00 dB	0.00 dB


TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#06 (ax Mode Beam forming)
TEST RESULTS:	PASS

Bandwidth: 20 MHz


	Lowest frequency	Middle frequency	Highest frequency
	5180 MHz	5200 MHz	5240 MHz
26dB bandwidth (MHz)	19.900	20.100	20.100
Occupied bandwidth (MHz)	18.700	18.700	18.500

26 dB Bandwidth:

Lowest Channel

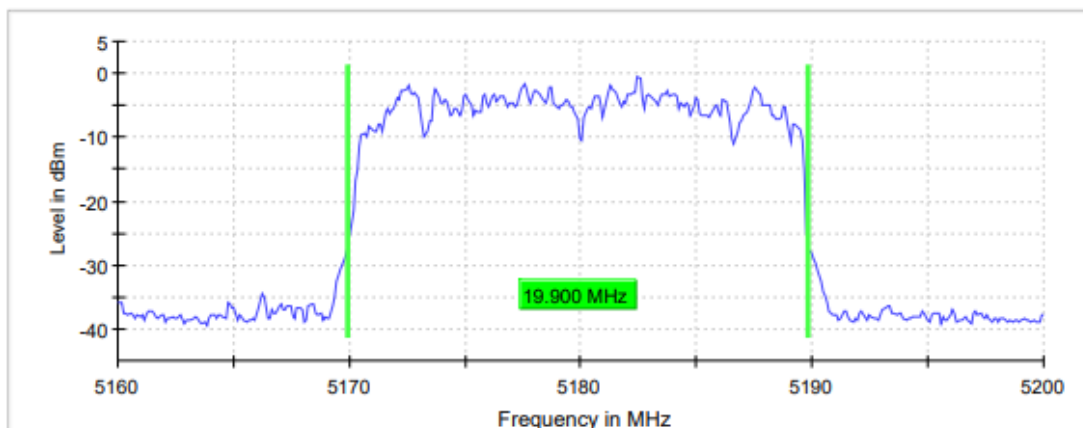


Middle Channel

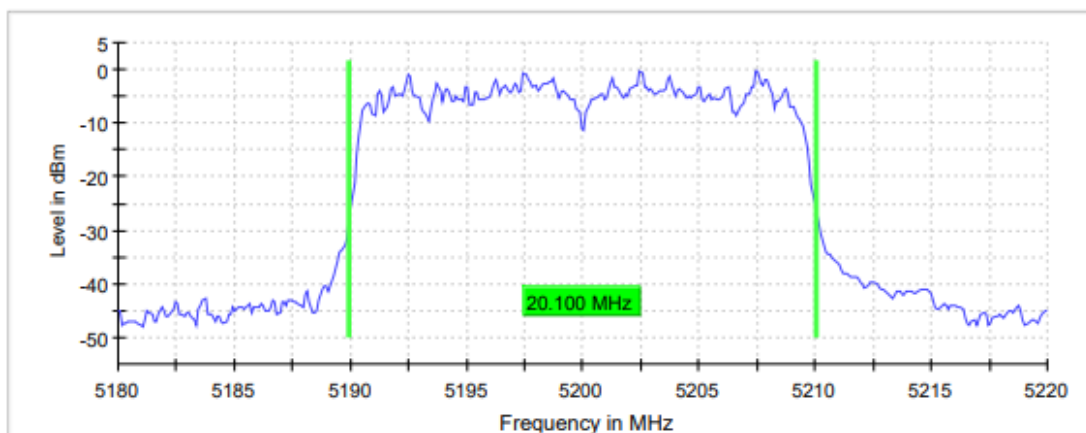

TEST RESULTS (Cont.)

Highest Channel

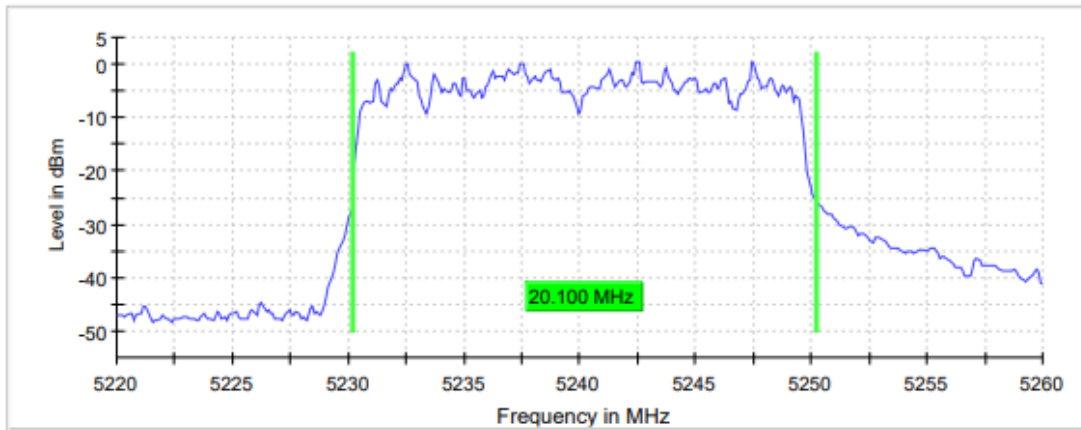


Measurement

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	5.16000 GHz	5.18000 GHz	5.22000 GHz
Stop Frequency	5.20000 GHz	5.22000 GHz	5.26000 GHz
Span	40.000 MHz	40.000 MHz	40.000 MHz
RBW	200.000 kHz	200.000 kHz	200.000 kHz
VBW	1.000 MHz	1.000 MHz	1.000 MHz
Sweep Points	400	400	400
Sweep time	28.477 μ s	28.477 μ s	28.477 μ s
Reference Level	10.000 dBm	0.000 dBm	0.000 dBm
Attenuation	30.000 dB	20.000 dB	20.000 dB
Detector	Max Peak	Max Peak	Max Peak
Sweep Count	200	200	200
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamp	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.30 dB	0.30 dB	0.30 dB
Run	31 / max. 150	56 / max. 150	61 / max. 150
Stable	5 / 5	5 / 5	5 / 5
Max Stable Difference	0.00 dB	0.24 dB	0.00 dB


TEST RESULTS (Cont.):

OCCUPIED BANDWIDTH


Lowest Channel

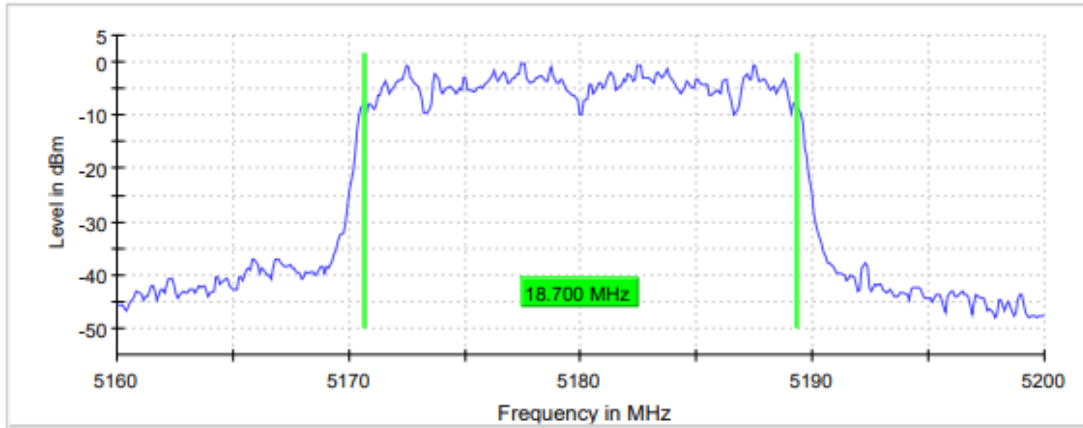

Middle Channel

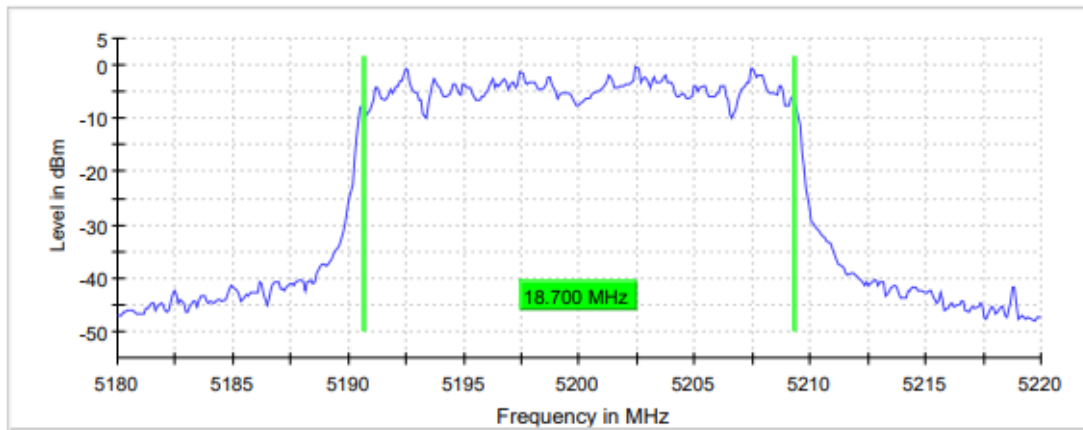

Highest Channel

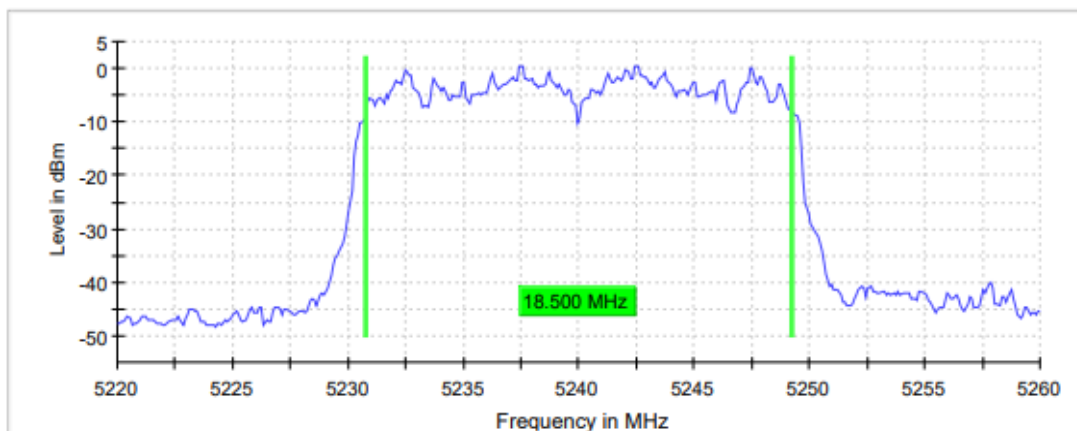

TEST RESULTS (Cont.)

Measurement

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	5.16000 GHz	5.18000 GHz	5.22000 GHz
Stop Frequency	5.20000 GHz	5.22000 GHz	5.26000 GHz
Span	40.000 MHz	40.000 MHz	40.000 MHz
RBW	200.000 kHz	200.000 kHz	200.000 kHz
VBW	1.000 MHz	1.000 MHz	1.000 MHz
Sweep Points	400	400	400
Sweep time	28.477 μ s	28.477 μ s	28.477 μ s
Reference Level	0.000 dBm	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	20.000 dB	20.000 dB
Detector	Max Peak	Max Peak	Max Peak
Sweep Count	200	200	200
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamp	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.30 dB	0.30 dB	0.30 dB
Run	97 / max. 150	79 / max. 150	96 / max. 150
Stable	5 / 5	5 / 5	5 / 5
Max Stable Difference	0.18 dB	0.04 dB	0.00 dB


TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#06 (ax Mode Beam forming)
TEST RESULTS:	PASS

Bandwidth: 40 MHz


	Lowest frequency	Highest frequency
	5190 MHz	5230 MHz
26dB bandwidth (MHz)	40.225	39.475
Occupied bandwidth (MHz)	37.250	37.250

26 dB Bandwidth

Lowest Channel

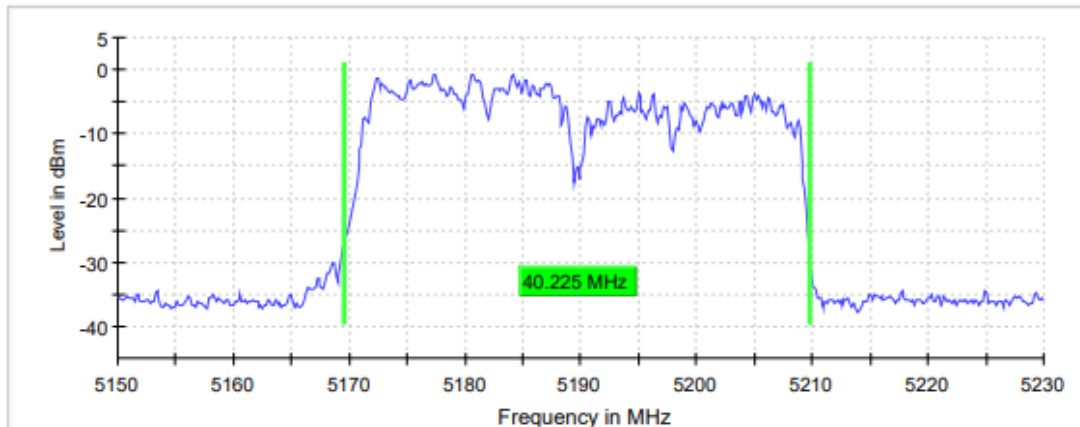

Highest Channel

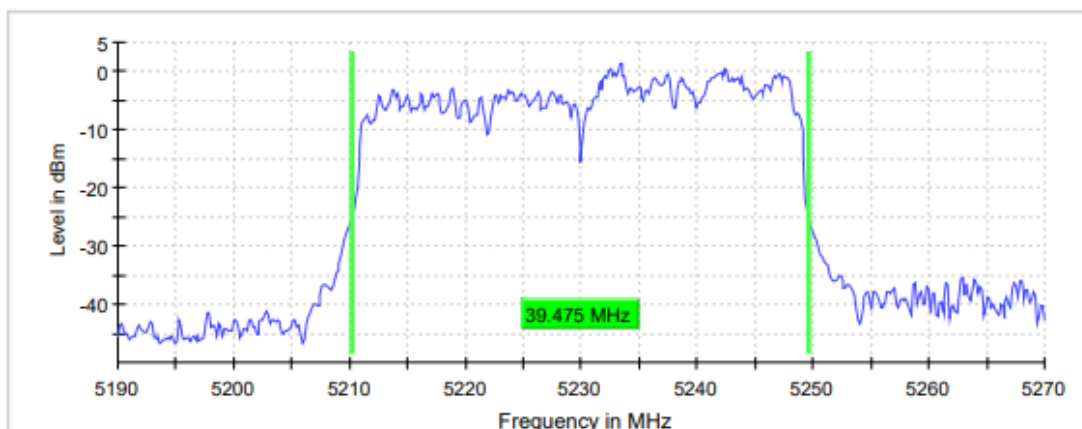

TEST RESULTS (Cont.)


Measurement

Setting	Instrument Value	Instrument Value
Start Frequency	5.15000 GHz	5.19000 GHz
Stop Frequency	5.23000 GHz	5.27000 GHz
Span	80.000 MHz	80.000 MHz
RBW	300.000 kHz	300.000 kHz
VBW	1.000 MHz	1.000 MHz
Sweep Points	533	533
Sweep time	31.621 µs	31.621 µs
Reference Level	10.000 dBm	0.000 dBm
Attenuation	30.000 dB	20.000 dB
Detector	Max Peak	Max Peak
Sweep Count	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweep type	FFT	FFT
Preamp	off	off
Stable mode	Trace	Trace
Stable value	0.30 dB	0.30 dB
Run	59 / max. 150	102 / max. 150
Stable	5 / 5	5 / 5
Max Stable Difference	0.00 dB	0.00dB


TEST RESULTS (Cont.):

OCCUPIED BANDWIDTH

Lowest Channel

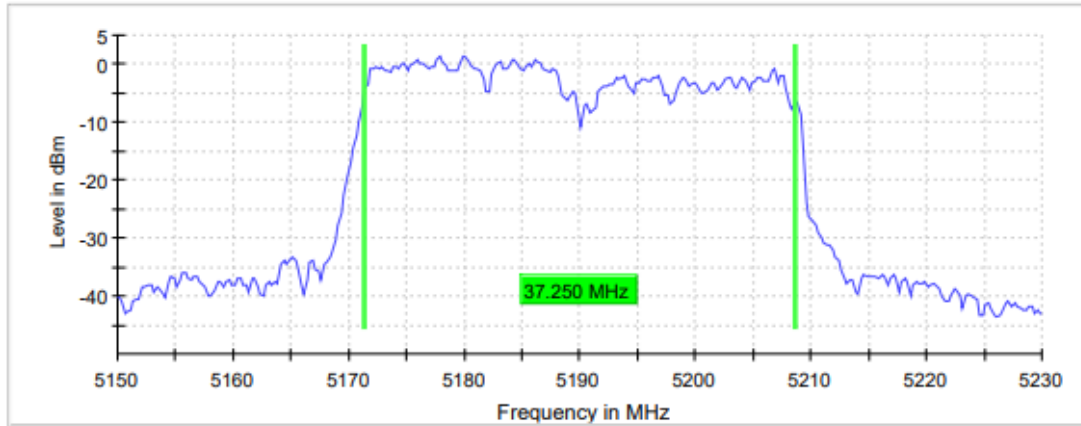

Highest Channel

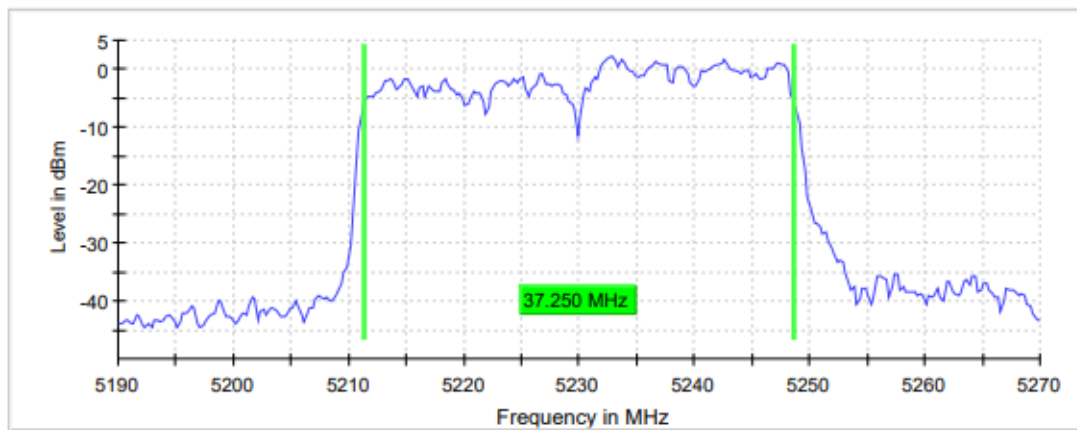

TEST RESULTS (Cont.)

Measurement


Setting	Instrument Value	Instrument Value
Start Frequency	5.15000 GHz	5.19000 GHz
Stop Frequency	5.23000 GHz	5.27000 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	500.000 kHz
VBW	2.000 MHz	2.000 MHz
Sweep Points	320	320
Sweep time	18.906 μ s	18.906 μ s
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	20.000 dB
Detector	Max Peak	Max Peak
Sweep Count	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweep type	FFT	FFT
Preamp	Off	off
Stable mode	Trace	Trace
Stable value	0.30 dB	0.30 dB
Run	95 / max. 150	84 / max. 150
Stable	5 / 5	5 / 5
Max Stable Difference	0.00 dB	0.19 dB

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#05 (ac Mode Beam forming)
TEST RESULTS:	PASS

Bandwidth: 80 MHz

	Lowest frequency
	5210 MHz
26dB bandwidth (MHz)	82.000
Occupied bandwidth (MHz)	76.500

**26 dB Bandwidth
 Lowest Channel**

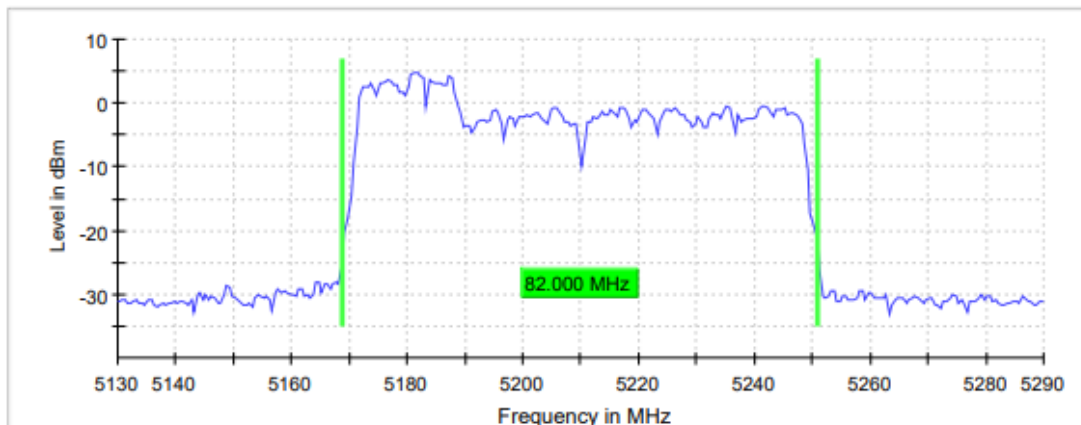


TEST RESULTS (Cont.)

Measurement

Setting	Instrument Value
Start Frequency	5.13000 GHz
Stop Frequency	5.29000 GHz
Span	160.000 MHz
RBW	1.000 MHz
VBW	3.000 MHz
Sweep Points	320
Sweep time	22.875 μ s
Reference Level	10.000 dBm
Attenuation	30.000 dB
Detector	Max Peak
Sweep Count	200
Filter	3 dB
Trace Mode	Max Hold
Sweep type	FFT
Preamp	off
Stable mode	Trace
Stable value	0.30 dB
Run	42 / max. 150
Stable	5 / 5
Max Stable Difference	0.00 dB

TEST RESULTS (Cont.):	OCCUPIED BANDWIDTH
------------------------------	---------------------------

Lowest Channel

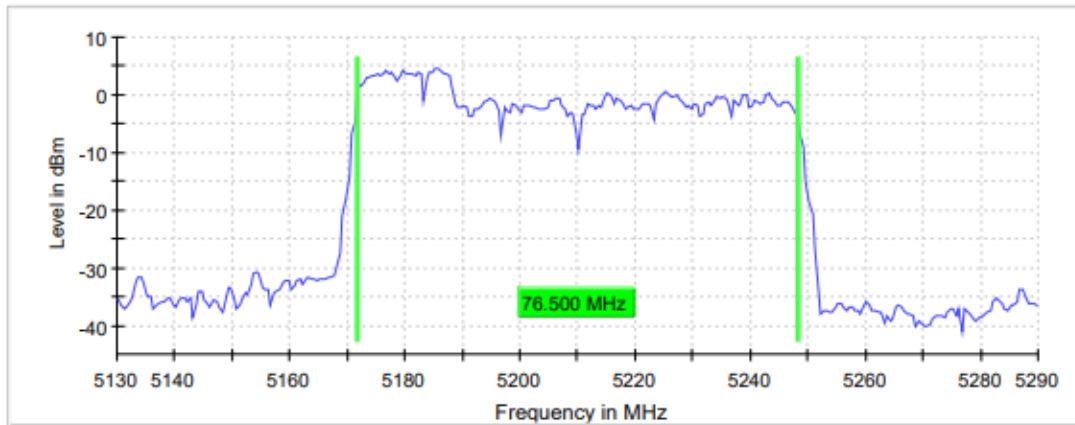

Measurement


Setting	Instrument Value
Start Frequency	5.13000 GHz
Stop Frequency	5.29000 GHz
Span	160.000 MHz
RBW	1.000 MHz
VBW	3.000 MHz
Sweep Points	320
Sweep time	22.875 μ s
Reference Level	0.000 dBm
Attenuation	20.000 dB
Detector	Max Peak
Sweep Count	200
Filter	3 dB
Trace Mode	Max Hold
Sweep type	FFT
Preamp	Off
Stable mode	Trace
Stable value	0.30 dB
Run	80 / max. 150
Stable	5 / 5
Max Stable Difference	0.05 dB

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#06 (ax Mode Beam forming)
TEST RESULTS:	PASS

Bandwidth: 80 MHz

	Lowest frequency 5210 MHz
26dB bandwidth (MHz)	81.500
Occupied bandwidth (MHz)	77.500

**26 dB Bandwidth
 Lowest Channel**

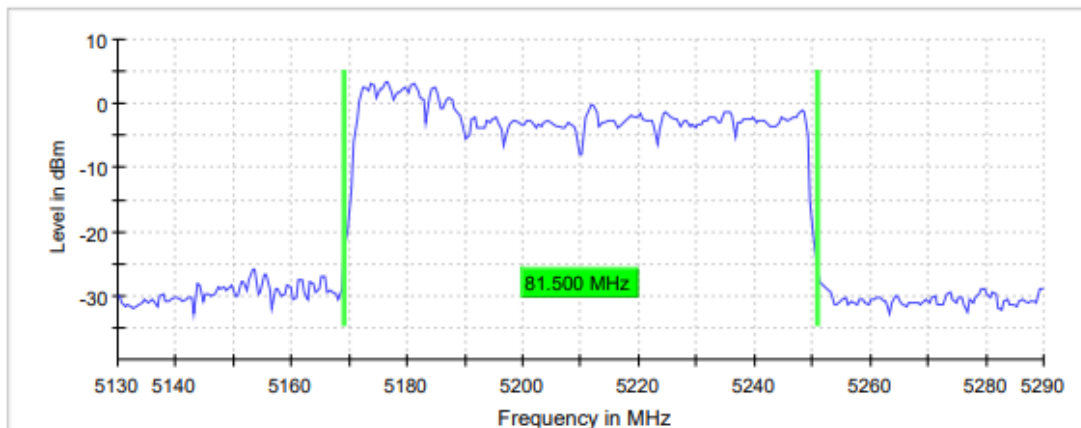


TEST RESULTS (Cont.)

Measurement

Setting	Instrument Value
Start Frequency	5.13000 GHz
Stop Frequency	5.29000 GHz
Span	160.000 MHz
RBW	1.000 MHz
VBW	3.000 MHz
Sweep Points	320
Sweep time	22.875 μ s
Reference Level	10.000 dBm
Attenuation	30.000 dB
Detector	Max Peak
Sweep Count	200
Filter	3 dB
Trace Mode	Max Hold
Sweep type	FFT
Preamp	off
Stable mode	Trace
Stable value	0.30 dB
Run	74 / max. 150
Stable	5 / 5
Max Stable Difference	0.00 dB

TEST RESULTS (Cont.):	OCCUPIED BANDWIDTH
------------------------------	---------------------------

Lowest Channel

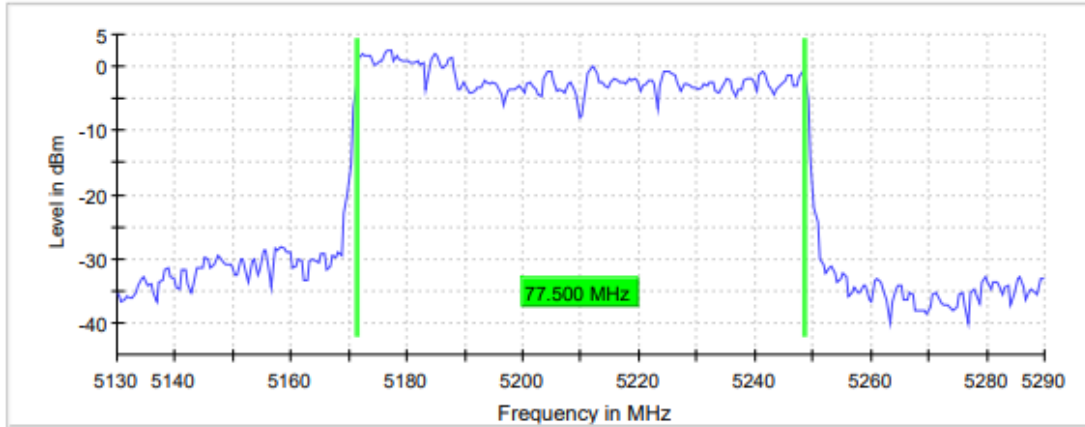

Measurement

Setting	Instrument Value
Start Frequency	5.13000 GHz
Stop Frequency	5.29000 GHz
Span	160.000 MHz
RBW	1.000 MHz
VBW	3.000 MHz
Sweep Points	320
Sweep time	22.875 μ s
Reference Level	0.000 dBm
Attenuation	20.000 dB
Detector	Max Peak
Sweep Count	200
Filter	3 dB
Trace Mode	Max Hold
Sweep type	FFT
Preamp	Off
Stable mode	Trace
Stable value	0.30 dB
Run	83 / max. 150
Stable	5 / 5
Max Stable Difference	0.27 dB

TEST B.2: POWER LIMITS. MAXIMUM OUTPUT POWER

LIMITS:	Product standard:	Part 15 Subpart C §15.407 and RSS-247
	Test standard:	Part 15 Subpart C §15.407(a) (1) (iv) and RSS-247 6.2.1.1

LIMITS

In band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


TEST SETUP

Measured according to ANSI C63.10, Section 11.9.2.3.2 Method AVGPM-G

The EIRP power (dBm) is calculated by adding the declared maximum antenna gain to the measured conducted power.

As Per KDB 662911 D01 Multiple Transmitter Output v02r01, for 802.11ac and ax Beam forming mode the directional gain for 2 TX antennas are calculated as follows:

$$\text{Directional Gain} = \text{Antenna gain} + 10\log(N_{\text{ANT}})$$

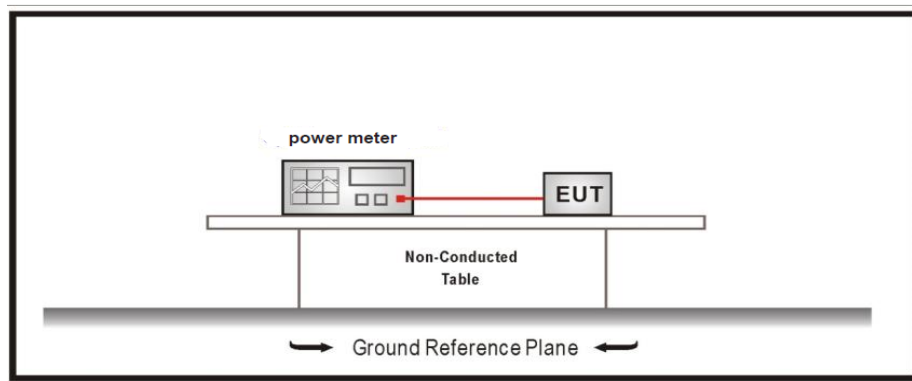

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01 (a mode SISO Radio A)
TEST RESULTS:	PASS

Bandwidth: 20 MHz

Maximum declared antenna gain: -2.8 dBi


	Lowest frequency	Middle frequency	Highest frequency
	5180 MHz	5200 MHz	5240 MHz
Maximum conducted power (dBm)	12.183	11.750	12.083
Maximum EIRP power (dBm)	9.383	8.95	9.283

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

TEST RESULTS (Cont.):


CONDUCTED OUTPUT POWER

Lowest Channel

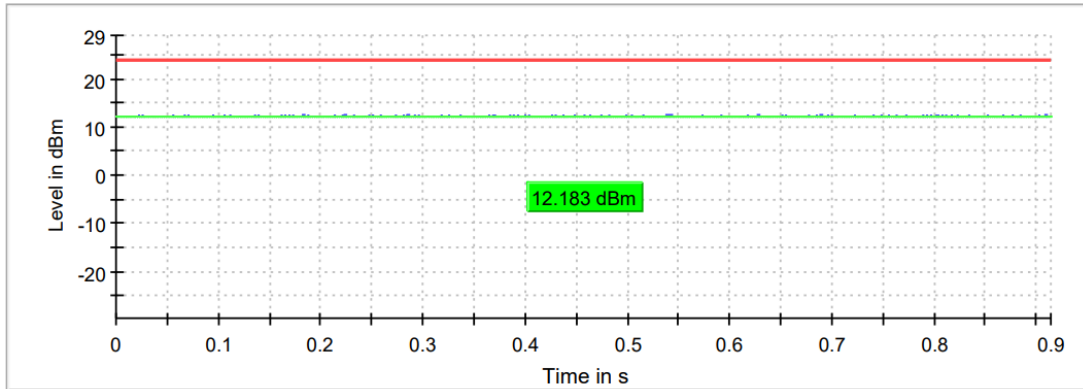


— Gated Trace — Overall — Limit

Middle Channel

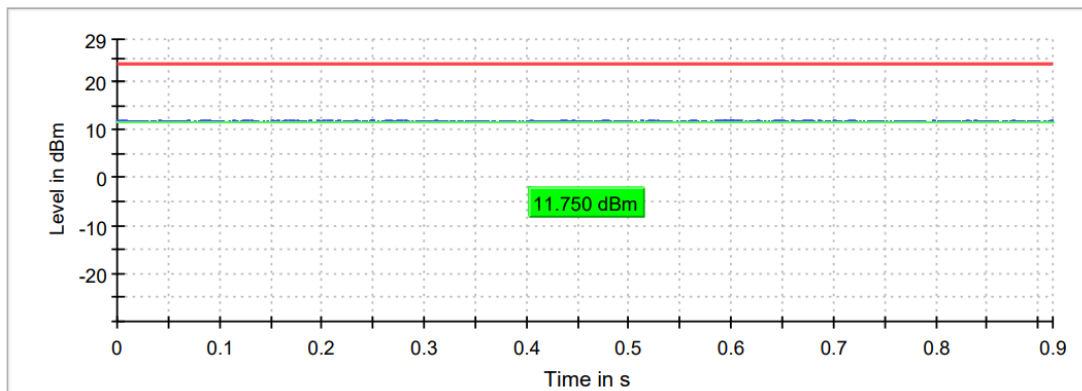

— Gated Trace — Overall — Limit

Highest Channel

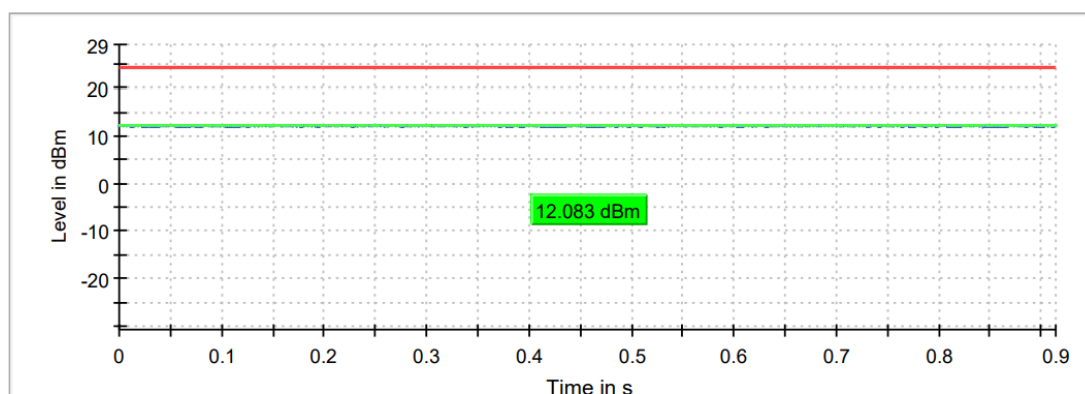

— Gated Trace — Overall — Limit


TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01 (a mode SISO Radio B)
TEST RESULTS:	PASS

Maximum declared antenna gain: -2.8 dBi


	Lowest frequency 5180 MHz	Middle frequency 5200 MHz	Highest frequency 5240 MHz
Maximum conducted power (dBm)	11.533	11.300	11.689
Maximum EIRP power (dBm)	8.733	8.500	8.889

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

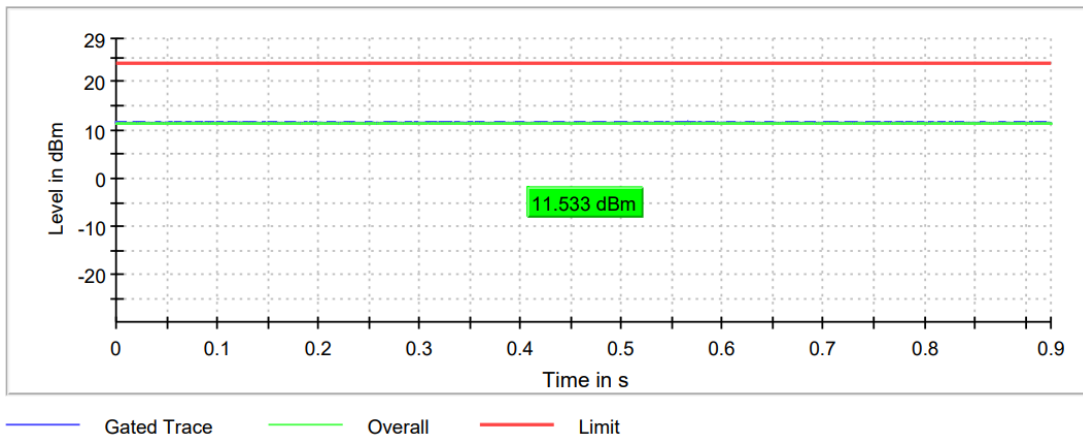


Middle Channel

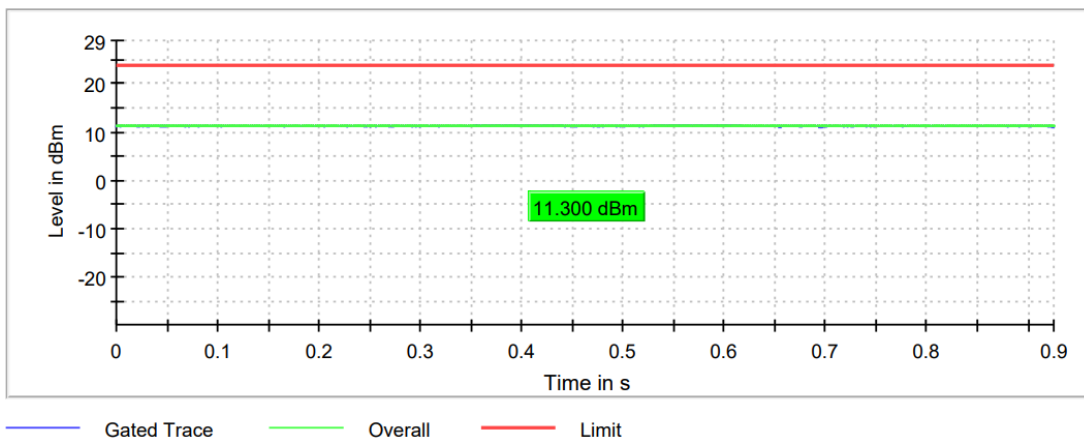

TEST RESULTS (Cont.):	CONDUCTED OUTPUT POWER
------------------------------	-------------------------------

Highest Channel

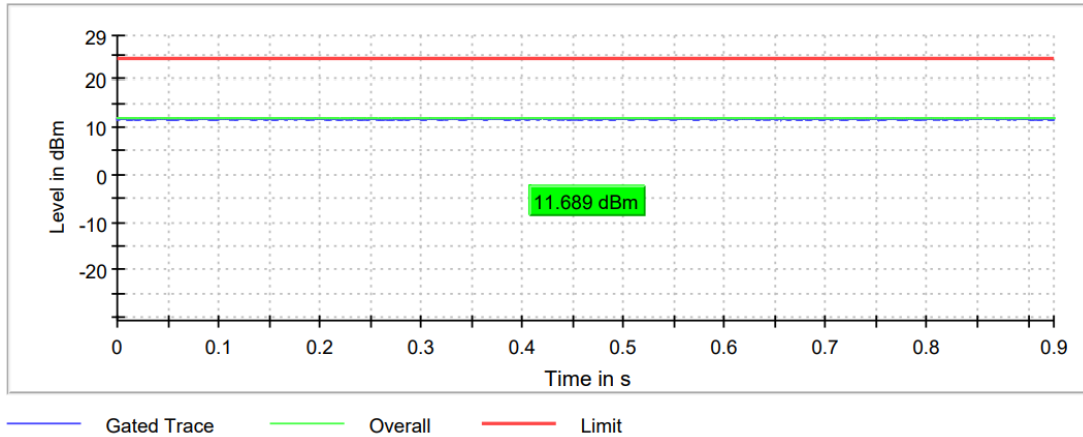

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01 (a mode MIMO Radio A+B)
TEST RESULTS:	PASS

Maximum declared antenna gain: -2.8 dBi


	Lowest frequency 5180 MHz	Middle frequency 5200 MHz	Highest frequency 5240 MHz
Maximum conducted power (dBm)	14.900	14.400	15.000
Maximum EIRP power (dBm)	12.100	11.600	12.200

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

TEST RESULTS (Cont.):


CONDUCTED OUTPUT POWER

Lowest Channel

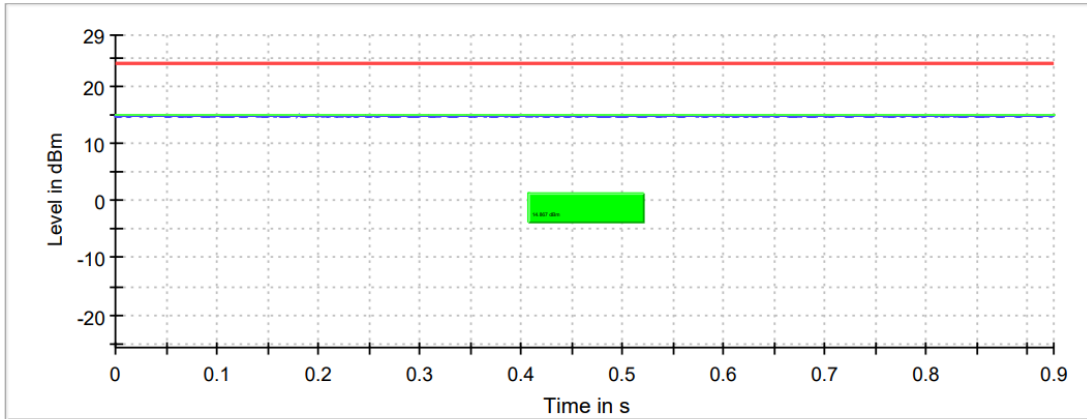


— Gated Trace — Overall — Limit

Middle Channel

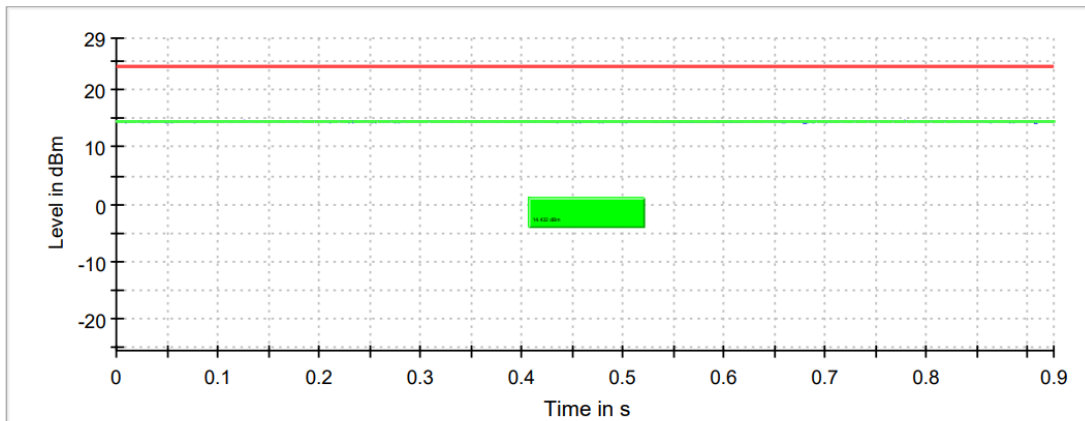

— Gated Trace — Overall — Limit

Highest Channel

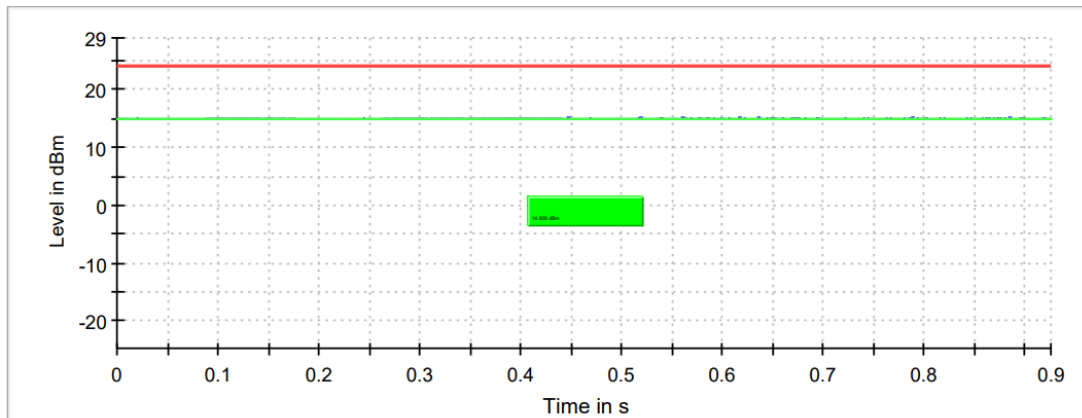

— Gated Trace — Overall — Limit

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#02 (n mode SISO Radio A)
TEST RESULTS:	PASS


Bandwidth: 20 MHz

Maximum declared antenna gain: -2.8 dBi


	Lowest frequency 5180 MHz	Middle frequency 5200 MHz	Highest frequency 5240 MHz
Maximum conducted power (dBm)	10.204	9.815	10.261
Maximum EIRP power (dBm)	7.404	7.015	7.461

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

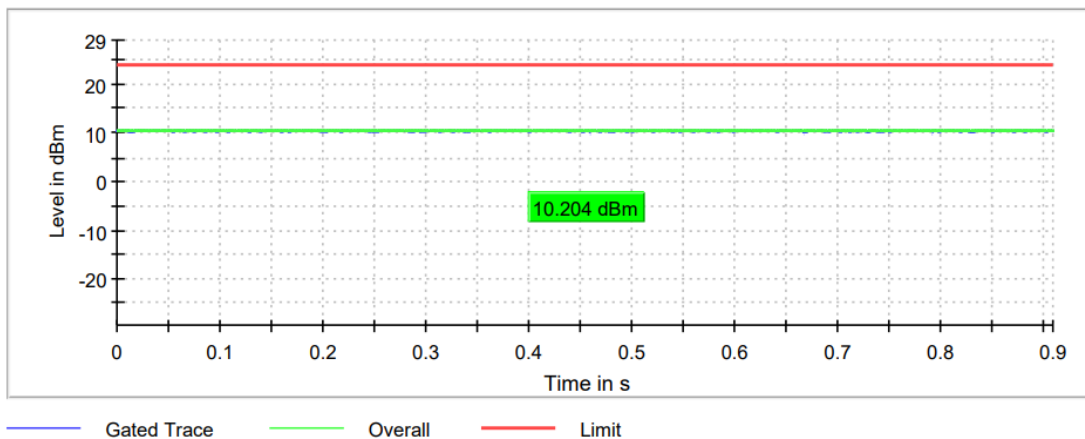


Middle Channel

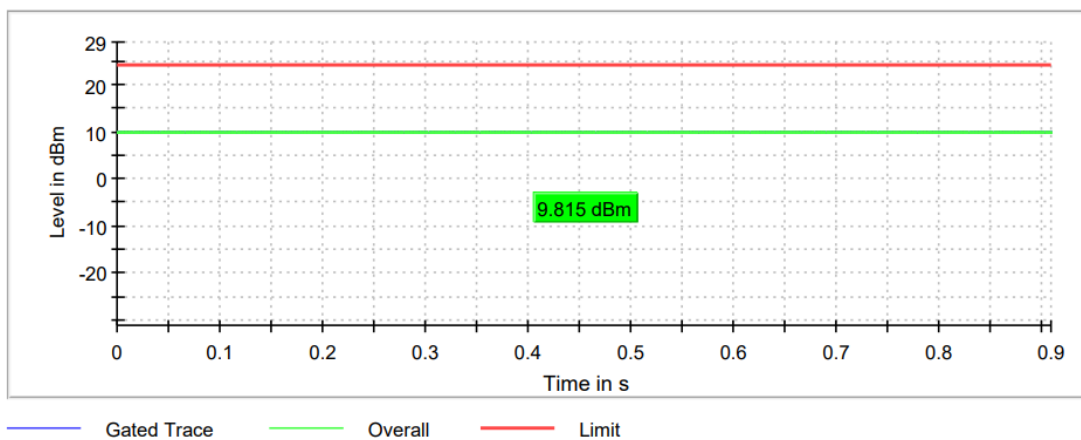

TEST RESULTS (Cont.):	CONDUCTED OUTPUT POWER
------------------------------	-------------------------------

Highest Channel

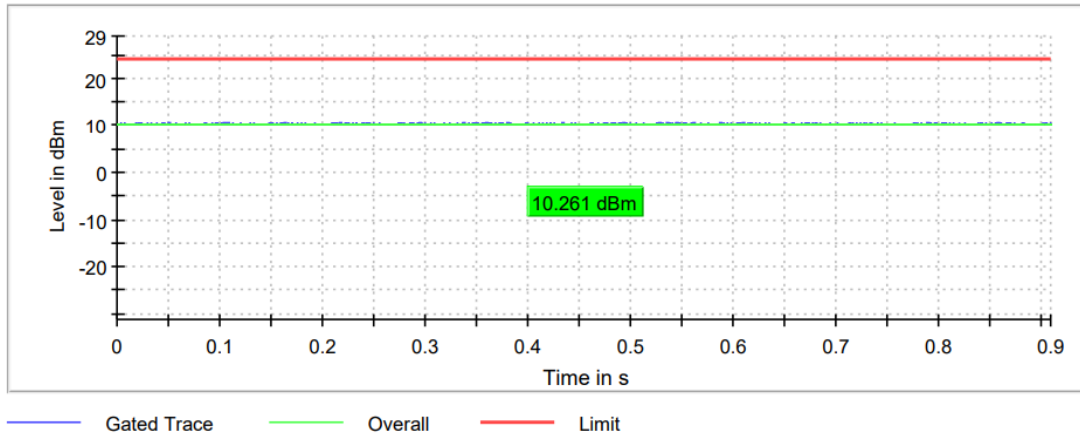

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#02 (n mode SISO Radio B)
TEST RESULTS:	PASS

Bandwidth: 20 MHz

Maximum declared antenna gain: -2.8 dBi


	Lowest frequency 5180 MHz	Middle frequency 5200 MHz	Highest frequency 5240 MHz
Maximum conducted power (dBm)	10.530	10.256	10.683
Maximum EIRP power (dBm)	7.730	7.456	7.883

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.


TEST RESULTS (Cont.):

CONDUCTED OUTPUT POWER


Lowest Channel

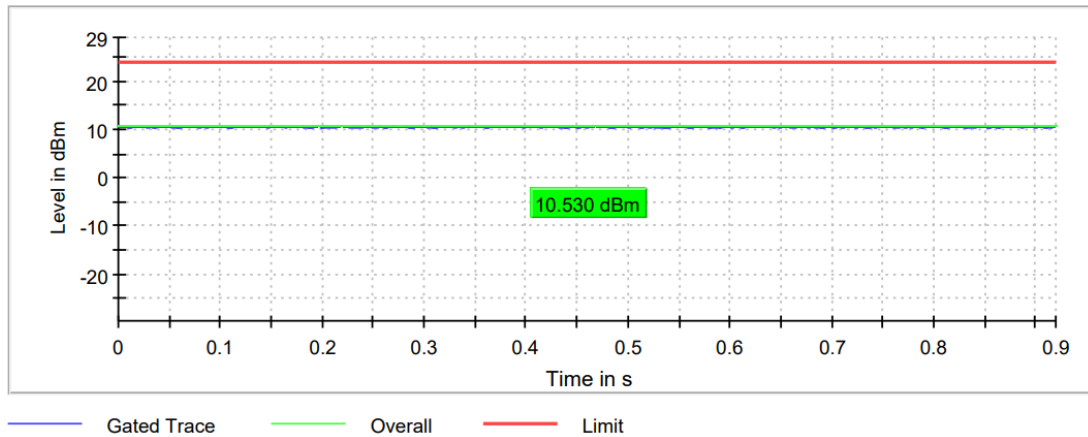

Middle Channel

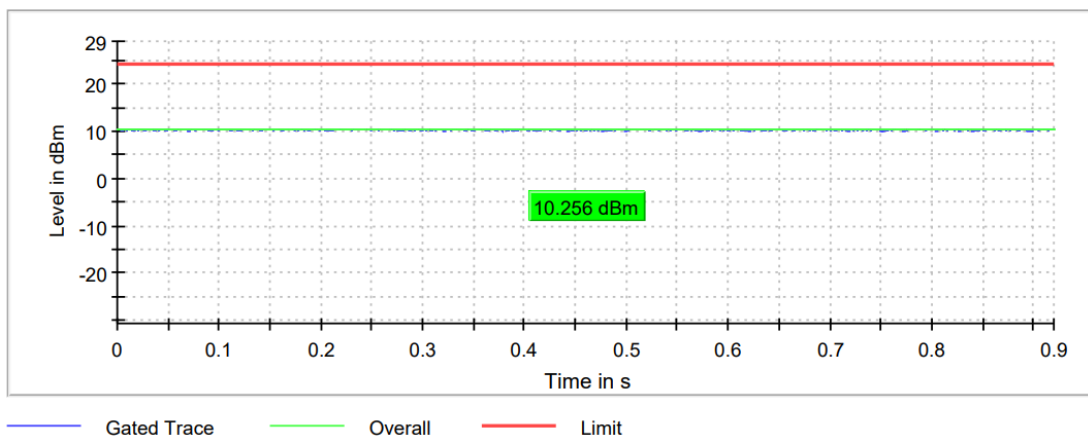

Highest Channel

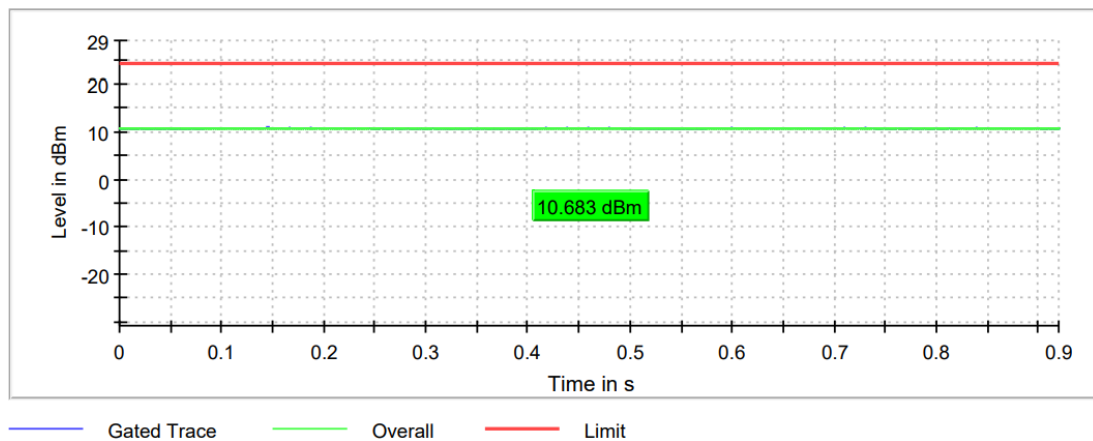

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#02 (n mode MIMO Radio A+B)
TEST RESULTS:	PASS


Bandwidth: 20 MHz

Maximum declared antenna gain: -2.8 dBi


	Lowest frequency 5180 MHz	Middle frequency 5200 MHz	Highest frequency 5240 MHz
Maximum conducted power (dBm)	13.951	13.434	13.958
Maximum EIRP power (dBm)	11.151	10.634	11.158

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

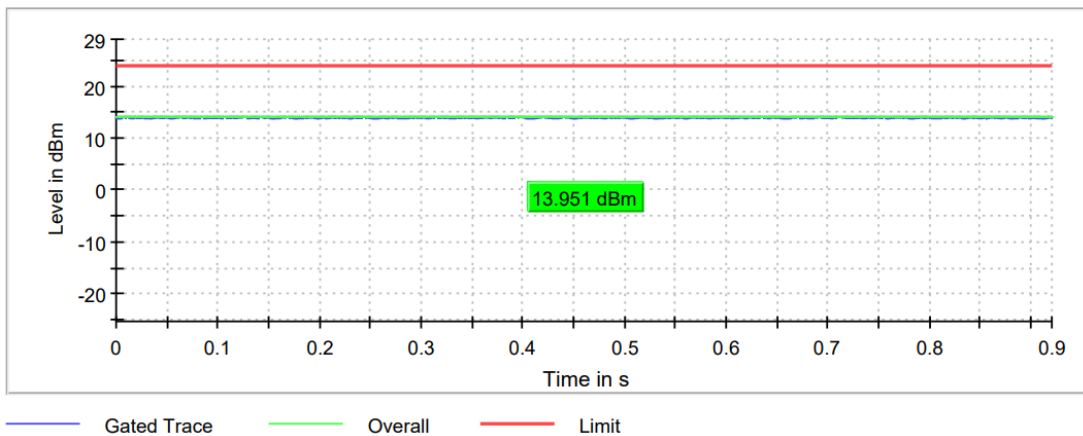


Middle Channel

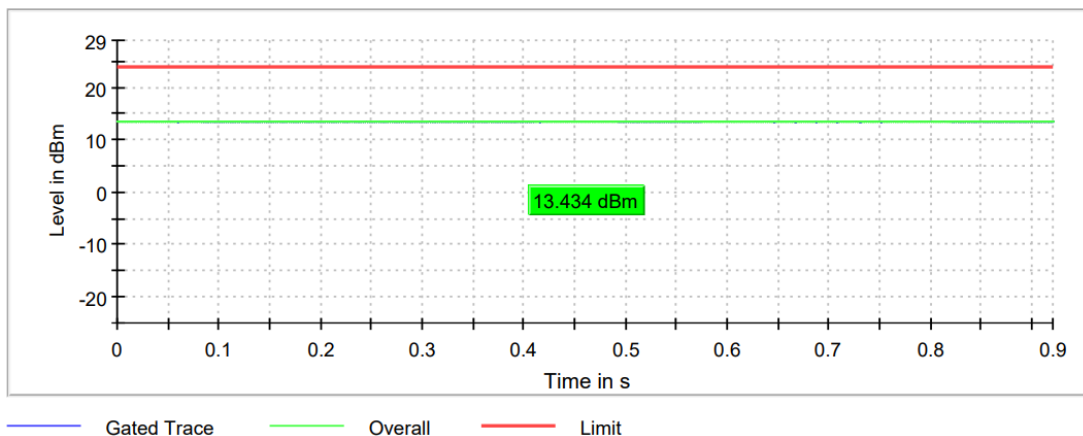

TEST RESULTS (Cont.):

CONDUCTED OUTPUT POWER

Highest Channel

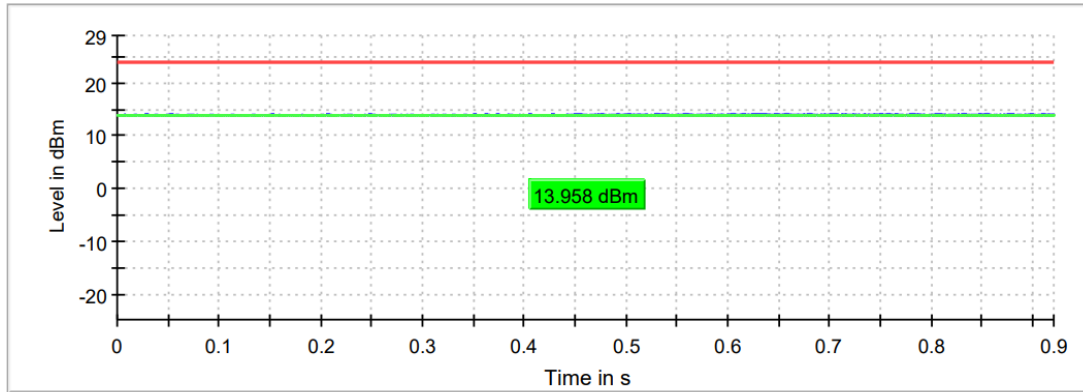

— Gated Trace — Overall — Limit

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#02 (n mode SISO Radio A)
TEST RESULTS:	PASS


Bandwidth: 40 MHz

Maximum declared antenna gain: -2.8 dBi


	Lowest frequency	Highest frequency
	5190 MHz	5230 MHz
Maximum conducted power (dBm)	10.299	10.666
Maximum EIRP power (dBm)	7.499	7.866

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

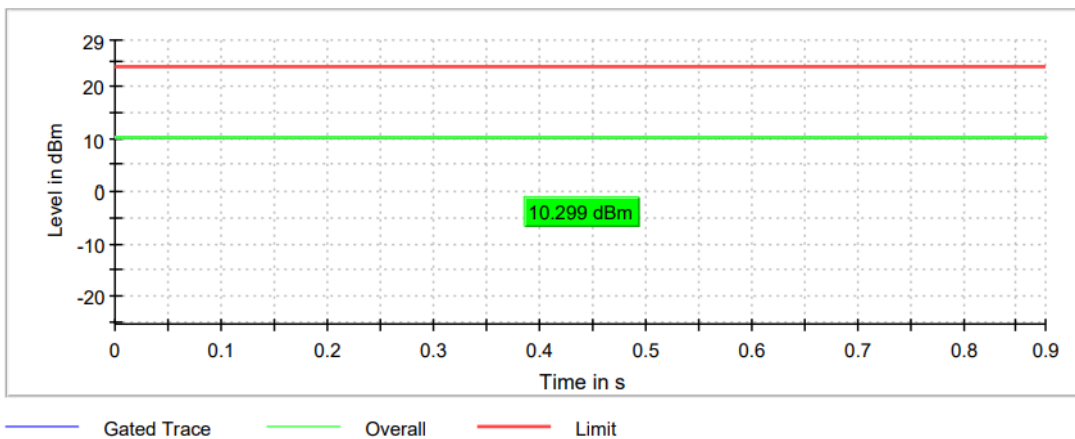

Highest Channel

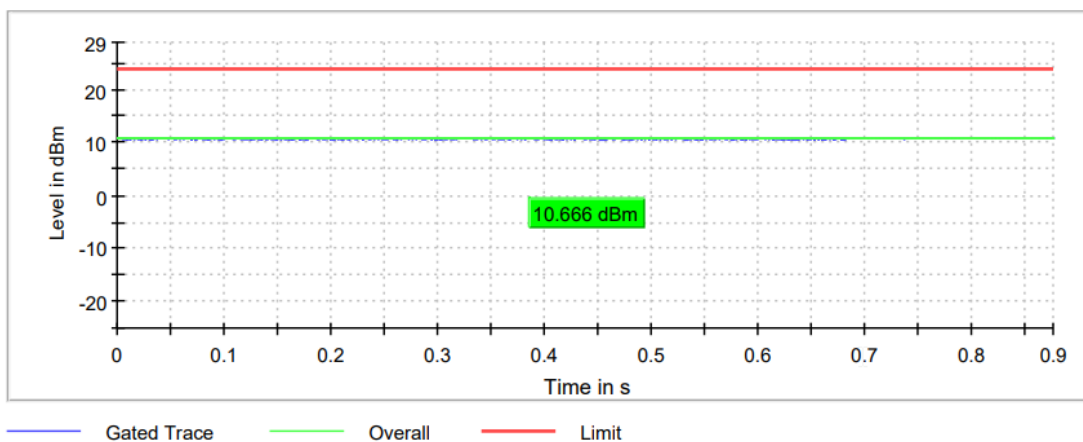

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#02 (n mode SISO Radio B)
TEST RESULTS:	PASS


Bandwidth: 40 MHz

Maximum declared antenna gain: -2.8 dBi


	Lowest frequency	Highest frequency
	5190 MHz	5230 MHz
Maximum conducted power (dBm)	9.978	10.102
Maximum EIRP power (dBm)	7.178	7.302

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

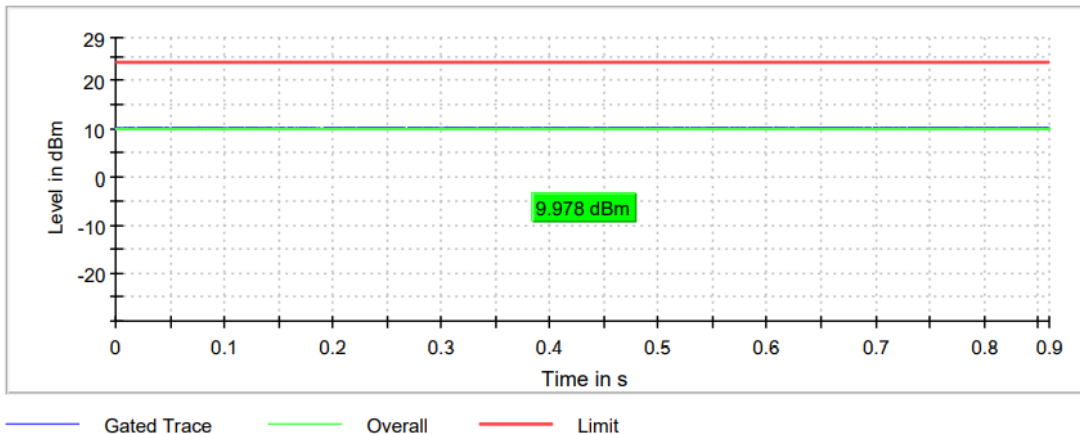

Highest Channel

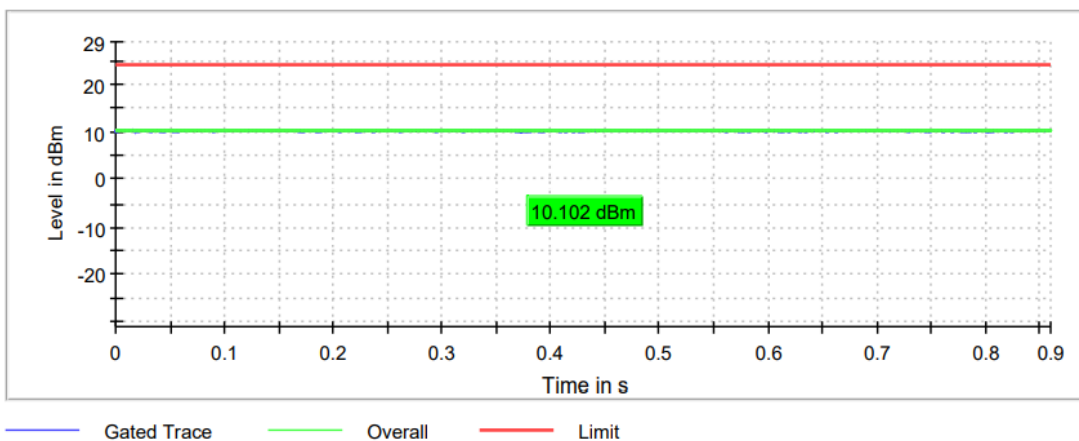

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#02 (n mode MIMO Radio A+B)
TEST RESULTS:	PASS


Bandwidth: 40 MHz

Maximum declared antenna gain: -2.8 dBi


	Lowest frequency	Highest frequency
	5190 MHz	5230 MHz
Maximum conducted power (dBm)	13.597	13.892
Maximum EIRP power (dBm)	10.797	11.092

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

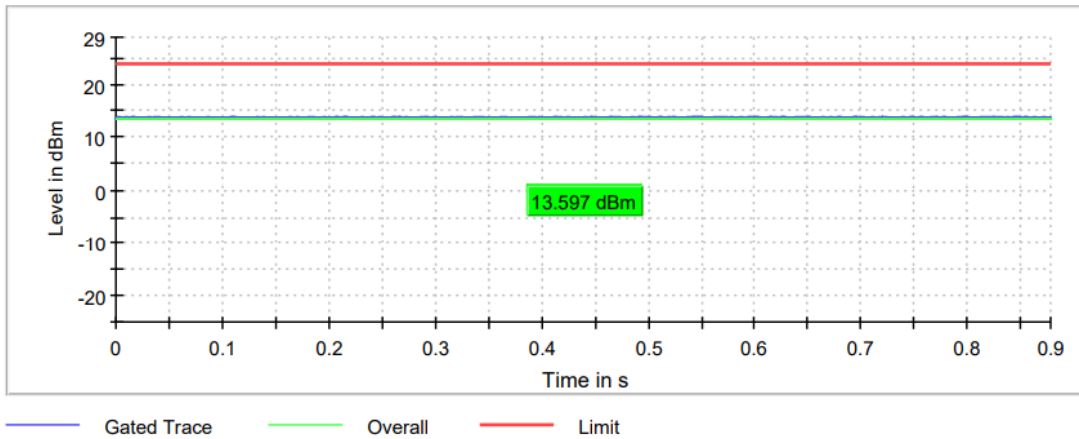

Highest Channel

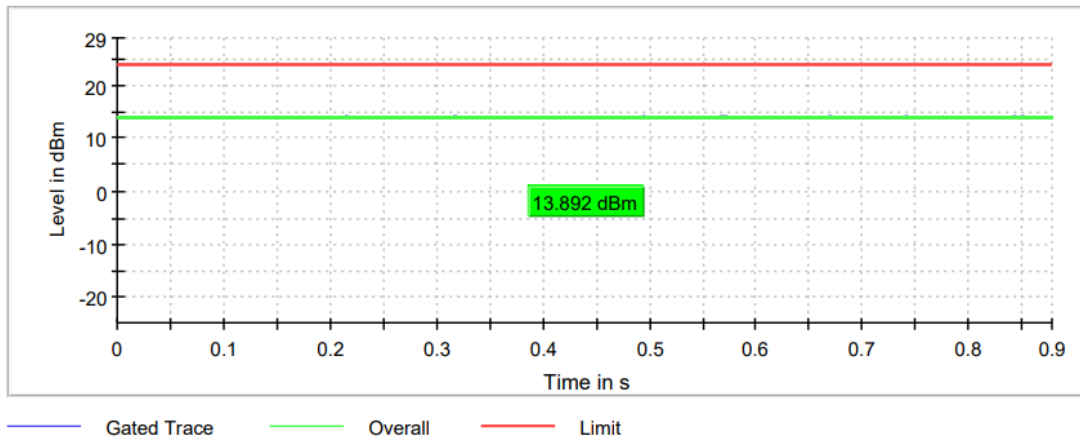

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#03 (ac mode SISO Radio A)
TEST RESULTS:	PASS


Bandwidth: 20 MHz

Maximum declared antenna gain: -2.8 dBi


	Lowest frequency 5180 MHz	Middle frequency 5200 MHz	Highest frequency 5240 MHz
Maximum conducted power (dBm)	12.492	12.092	12.408
Maximum EIRP power (dBm)	9.692	9.292	9.608

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

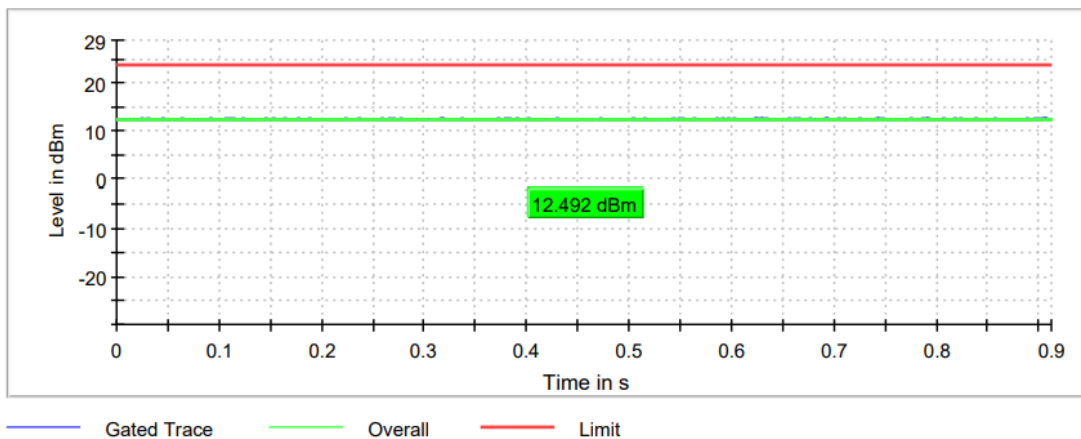


Middle Channel

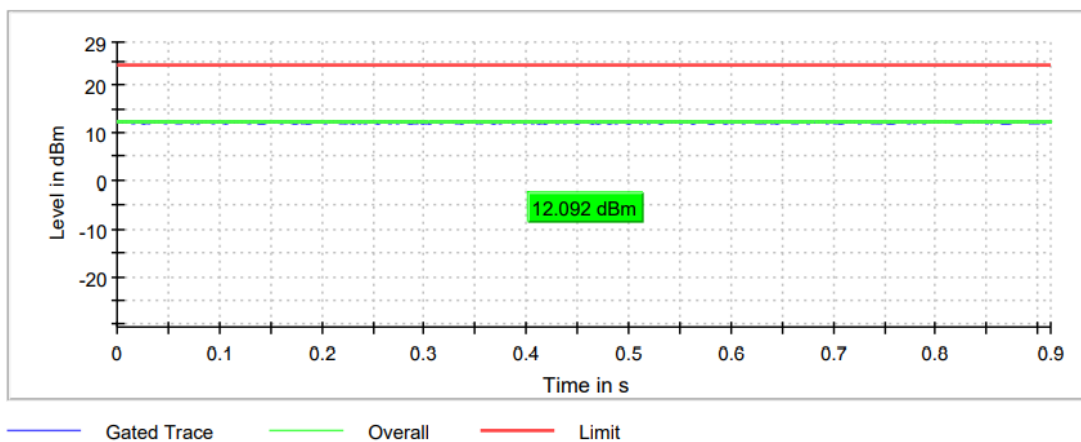

TEST RESULTS (Cont.):	CONDUCTED OUTPUT POWER
------------------------------	-------------------------------

Highest Channel

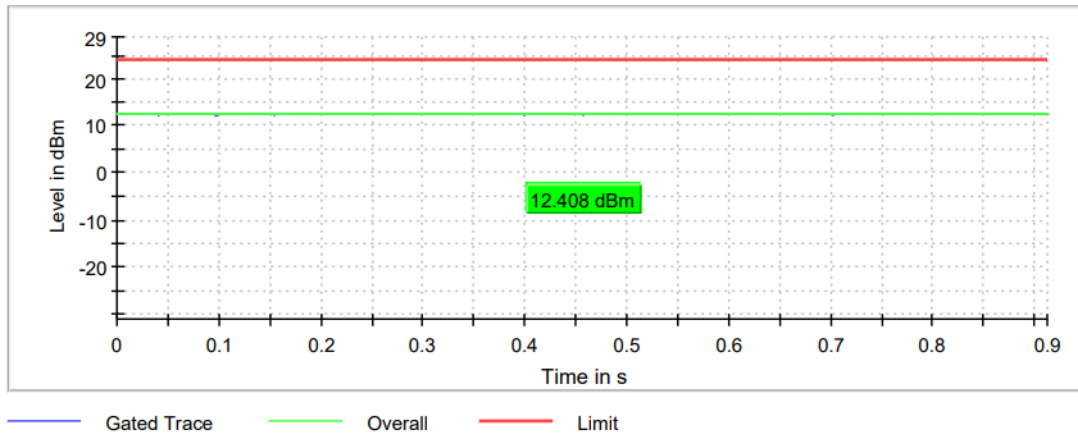

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#03 (ac mode SISO Radio B)
TEST RESULTS:	PASS

Bandwidth: 20 MHz

Maximum declared antenna gain: -2.8 dBi


	Lowest frequency 5180 MHz	Middle frequency 5200 MHz	Highest frequency 5240 MHz
Maximum conducted power (dBm)	12.243	11.924	12.363
Maximum EIRP power (dBm)	9.443	9.124	9.563

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

TEST RESULTS (Cont.):


CONDUCTED OUTPUT POWER

Lowest Channel

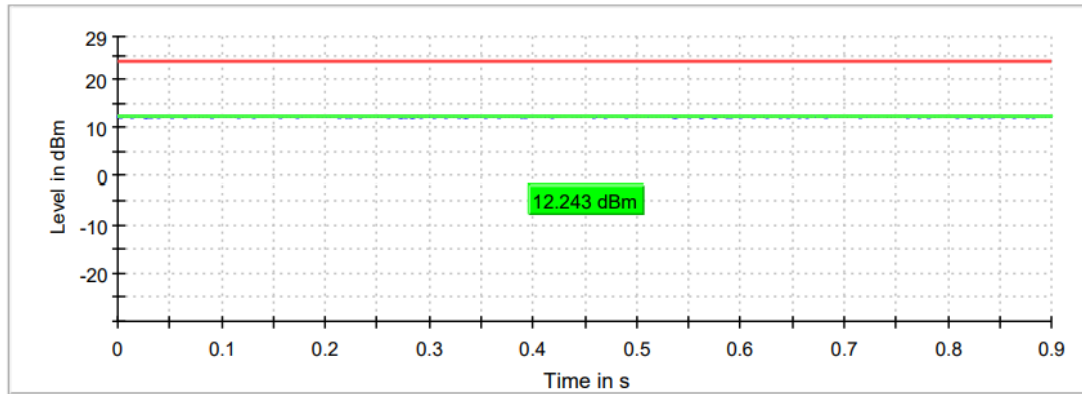


— Gated Trace — Overall — Limit

Middle Channel

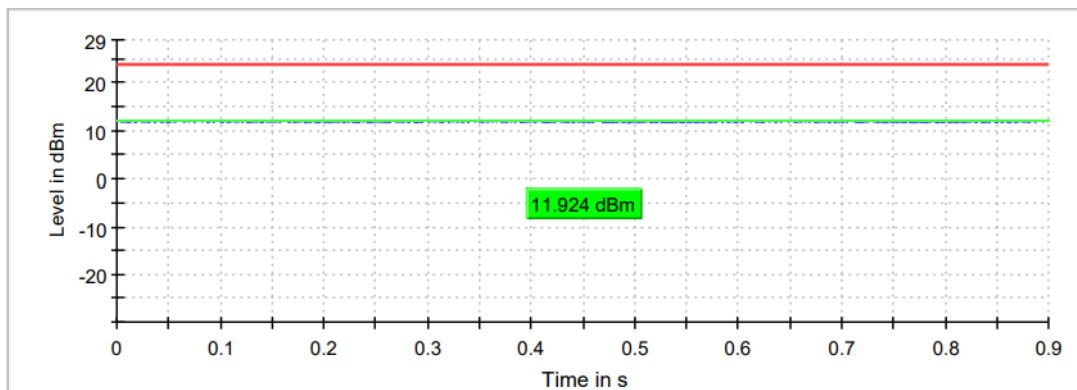

— Gated Trace — Overall — Limit

Highest Channel

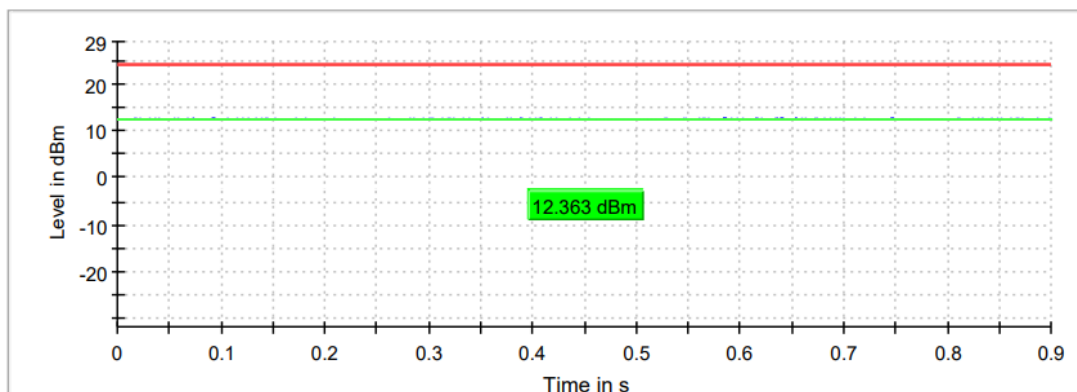

— Gated Trace — Overall — Limit

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#03 (ac mode MIMO Radio A+B)
TEST RESULTS:	PASS


Bandwidth: 20 MHz

Maximum declared antenna gain: -2.8 dBi


	Lowest frequency 5180 MHz	Middle frequency 5200 MHz	Highest frequency 5240 MHz
Maximum conducted power (dBm)	15.731	15.412	15.890
Maximum EIRP power (dBm)	12.931	12.612	13.090

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

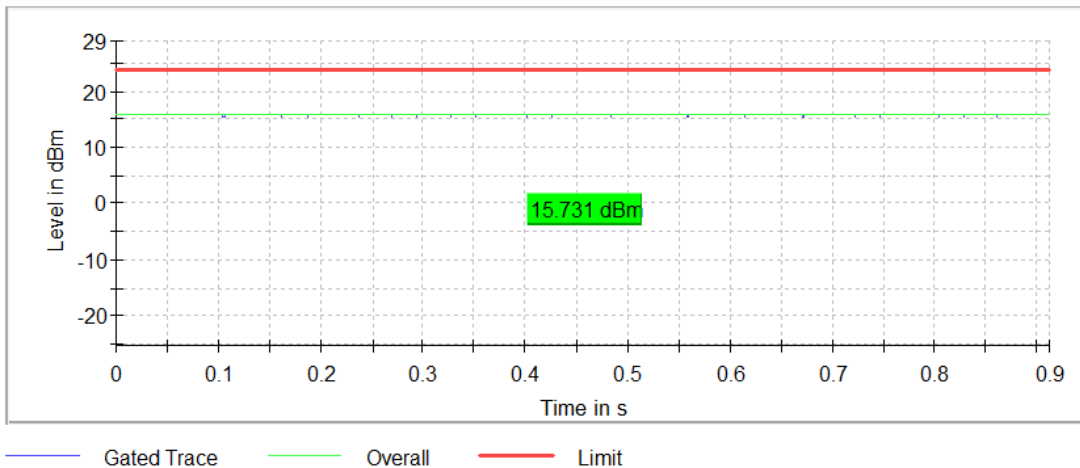


Middle Channel

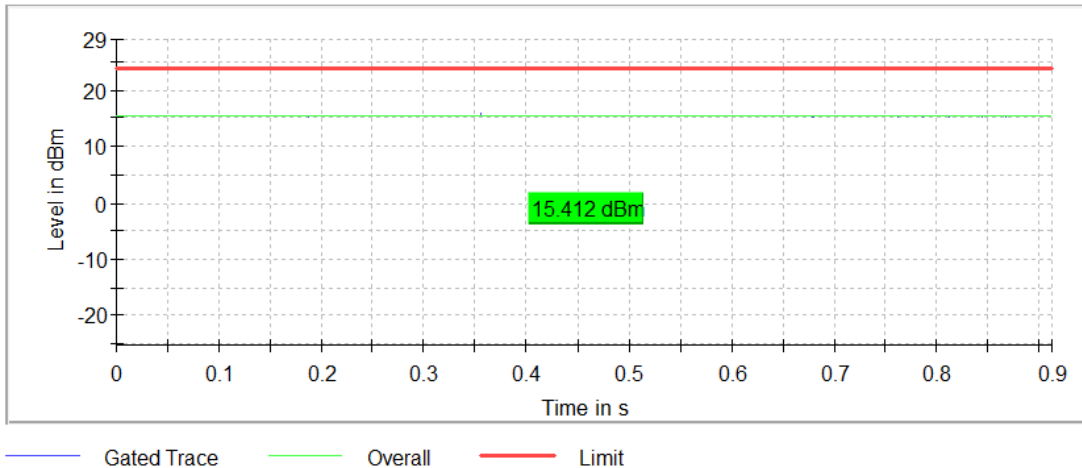

TEST RESULTS (Cont.):

CONDUCTED OUTPUT POWER

Highest Channel

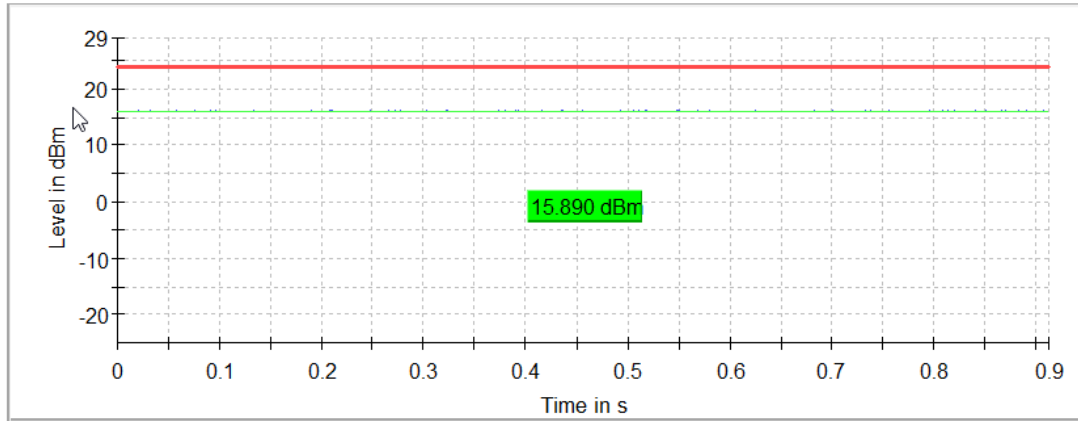

— Gated Trace — Overall — Limit

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#03 (ac mode SISO Radio A)
TEST RESULTS:	PASS


Bandwidth: 40 MHz

Maximum declared antenna gain: -2.8 dBi


	Lowest frequency	Highest frequency
	5190 MHz	5230 MHz
Maximum conducted power (dBm)	8.827	9.334
Maximum EIRP power (dBm)	6.027	6.534

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

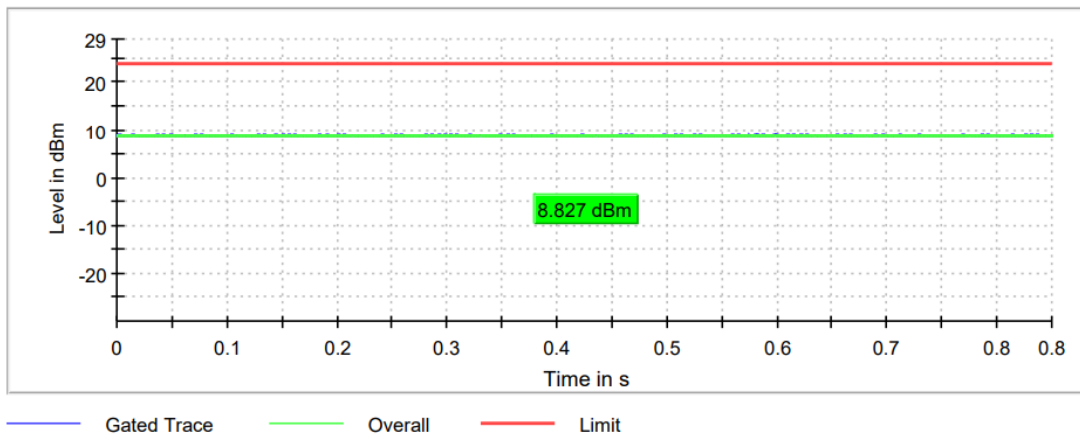

Highest Channel

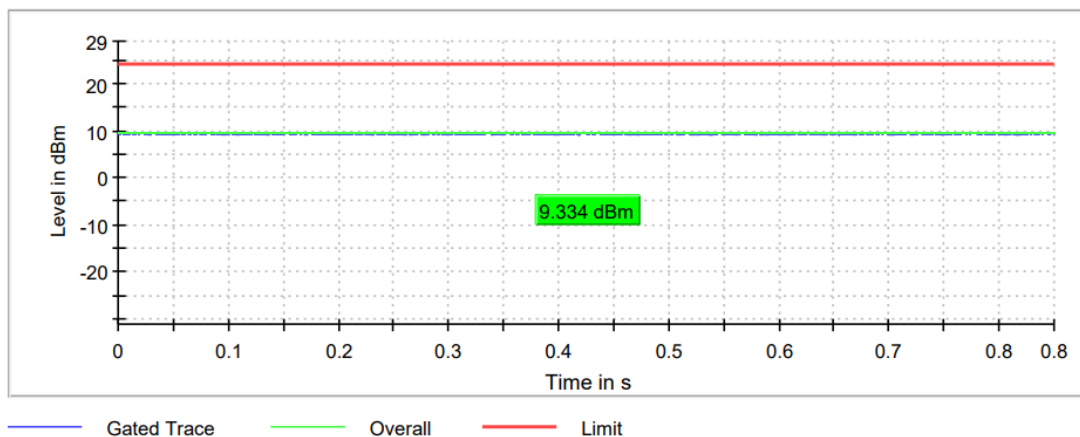

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#02 (ac mode SISO Radio B)
TEST RESULTS:	PASS


Bandwidth: 40 MHz

Maximum declared antenna gain: -2.8 dBi


	Lowest frequency	Highest frequency
	5190 MHz	5230 MHz
Maximum conducted power (dBm)	9.402	8.965
Maximum EIRP power (dBm)	6.602	6.165

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

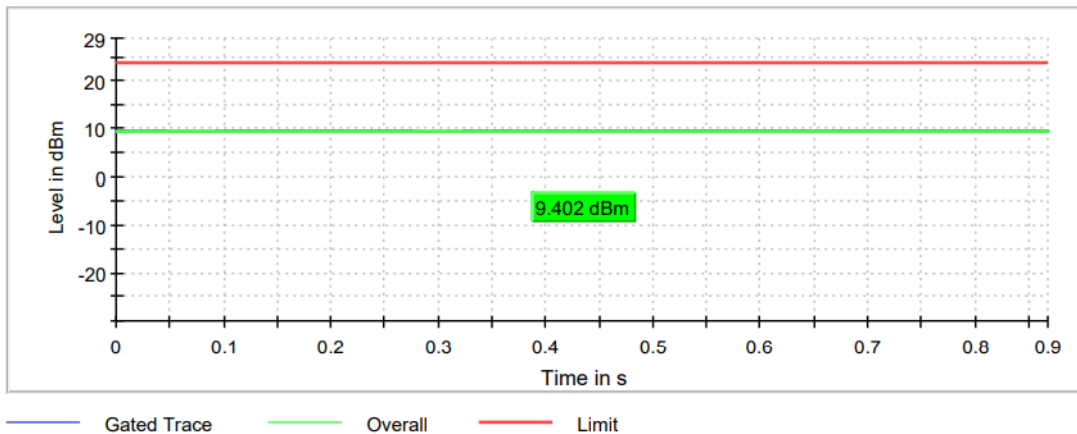

Highest Channel

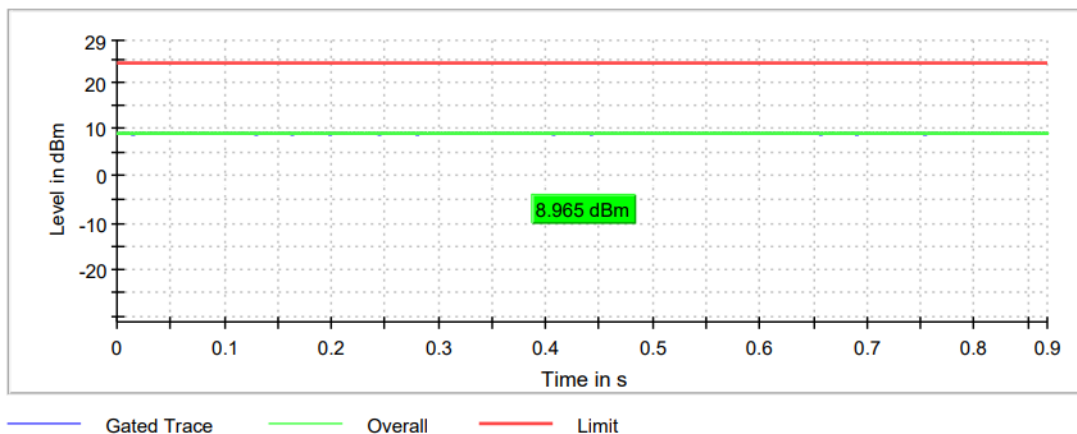

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#03 (ac mode MIMO Radio A+B)
TEST RESULTS:	PASS


Bandwidth: 40 MHz

Maximum declared antenna gain: -2.8 dBi

	Lowest frequency	Highest frequency
	5190 MHz	5230 MHz
Maximum conducted power (dBm)	15.70	15.80
Maximum EIRP power (dBm)	12.90	13.00


The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

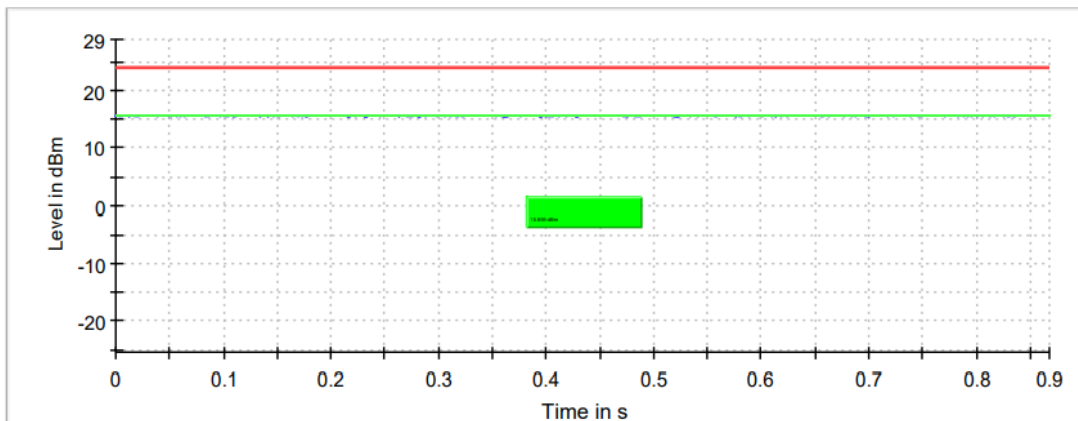

— Gated Trace — Overall — Limit

Highest Channel

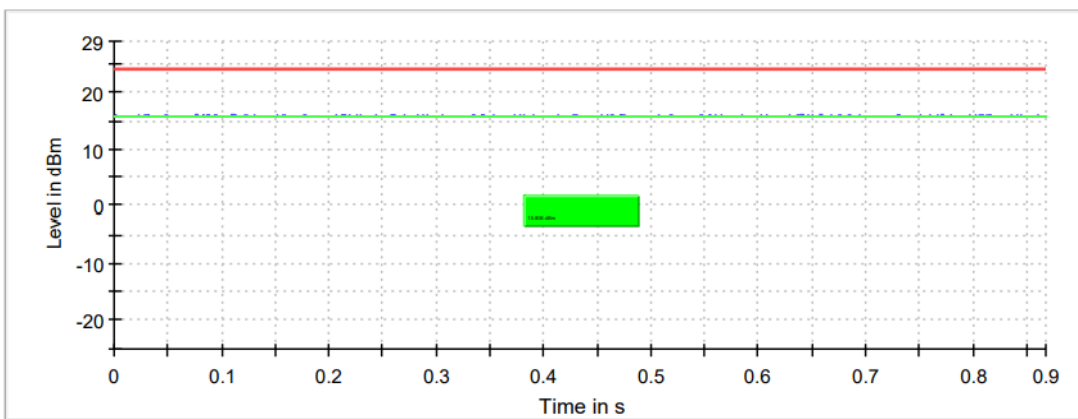

— Gated Trace — Overall — Limit

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#03 (ac mode SISO Radio A)
TEST RESULTS:	PASS


Bandwidth: 80 MHz

Maximum declared antenna gain: -2.8 dBi

	Lowest frequency 5210 MHz
Maximum conducted power (dBm)	9.437
Maximum EIRP power (dBm)	6.637

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

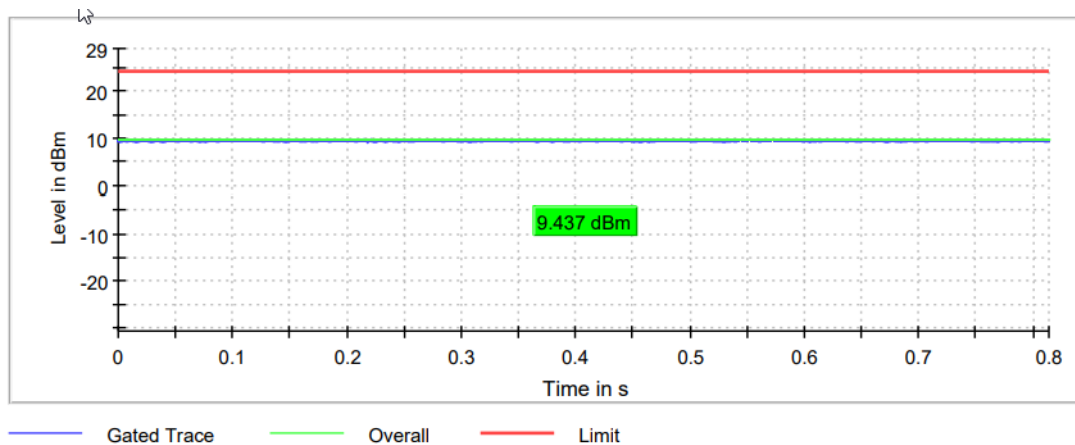

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#03 (ac mode SISO Radio B)
TEST RESULTS:	PASS


Bandwidth: 80 MHz

Maximum declared antenna gain: -2.8 dBi

	Lowest frequency 5210 MHz
Maximum conducted power (dBm)	9.395
Maximum EIRP power (dBm)	7.135

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

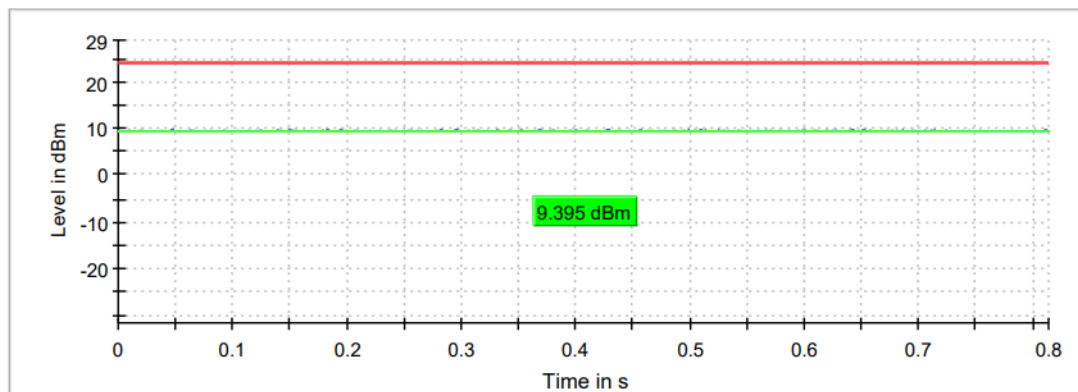

— Gated Trace — Overall — Limit

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#03 (ac mode MIMO Radio A+B)
TEST RESULTS:	PASS


Bandwidth: 80 MHz

Maximum declared antenna gain: -2.8 dBi

	Lowest frequency 5210 MHz
Maximum conducted power (dBm)	12.588
Maximum EIRP power (dBm)	9.788

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

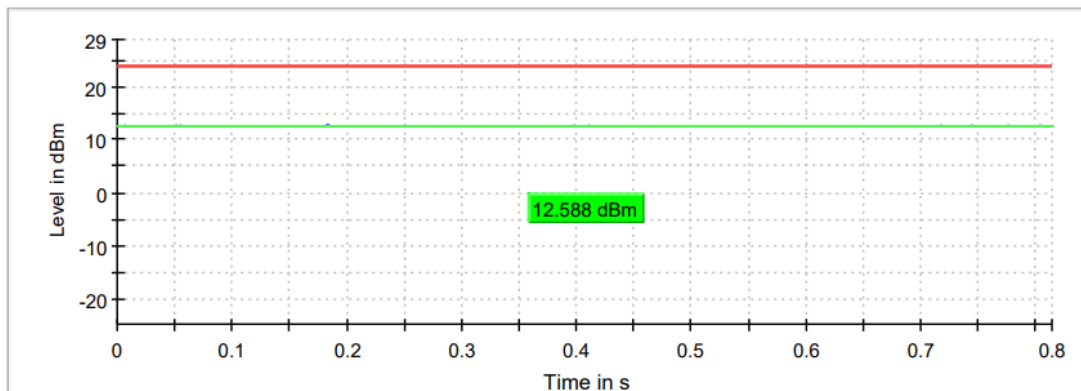

— Gated Trace — Overall — Limit

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#04 (ax mode SISO Radio A)
TEST RESULTS:	PASS


Bandwidth: 20 MHz

Maximum declared antenna gain: -2.8 dBi


	Lowest frequency 5180 MHz	Middle frequency 5200 MHz	Highest frequency 5240 MHz
Maximum conducted power (dBm)	10.982	10.531	11.181
Maximum EIRP power (dBm)	8.182	7.731	8.381

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

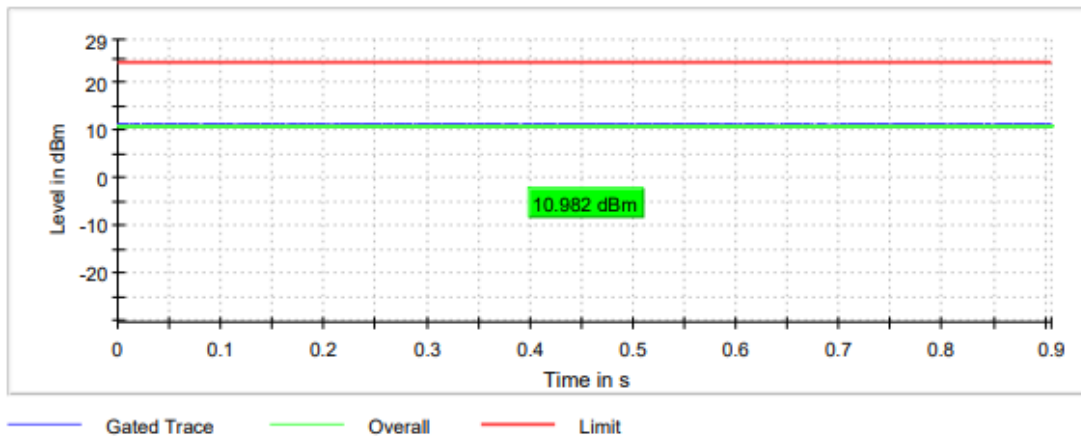


Middle Channel

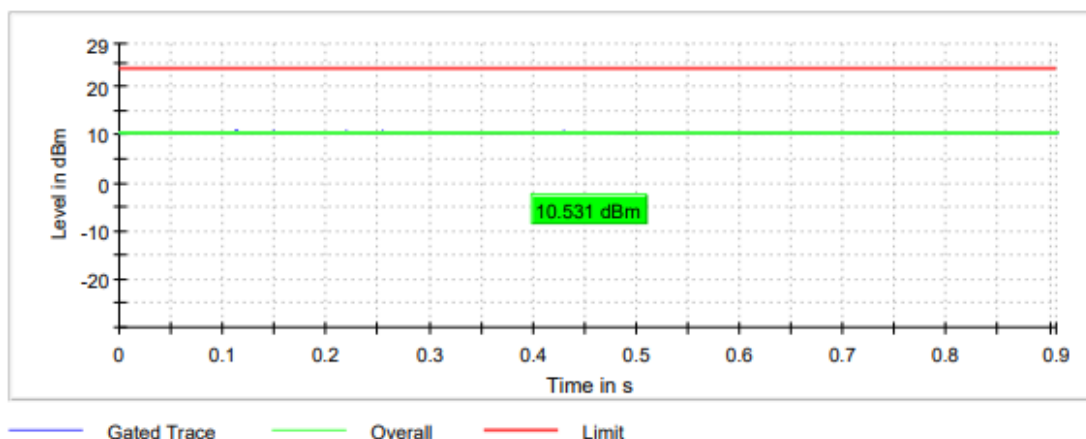

TEST RESULTS (Cont.):	CONDUCTED OUTPUT POWER
------------------------------	-------------------------------

Highest Channel

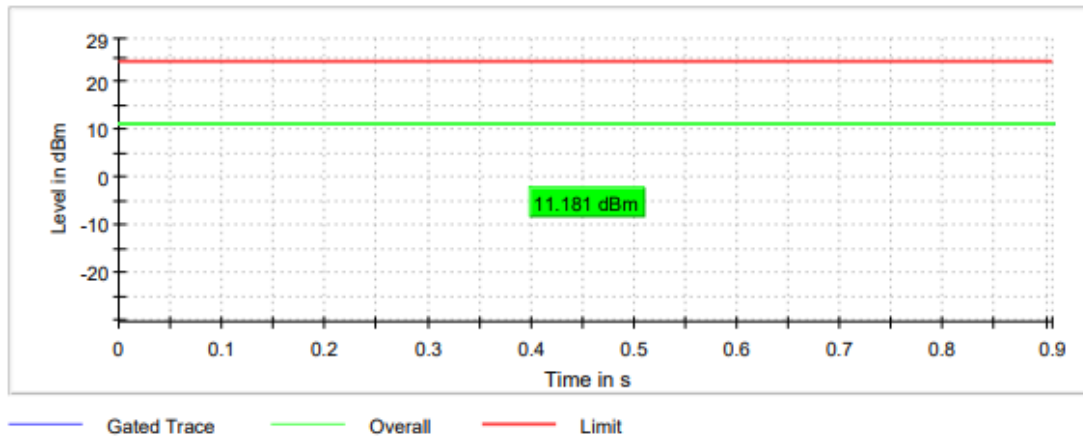

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#04 (ax mode SISO Radio B)
TEST RESULTS:	PASS

Bandwidth: 20 MHz

Maximum declared antenna gain: -2.8 dBi


	Lowest frequency 5180 MHz	Middle frequency 5200 MHz	Highest frequency 5240 MHz
Maximum conducted power (dBm)	10.861	10.866	11.130
Maximum EIRP power (dBm)	8.061	8.066	8.330

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.


TEST RESULTS (Cont.):

CONDUCTED OUTPUT POWER


Lowest Channel

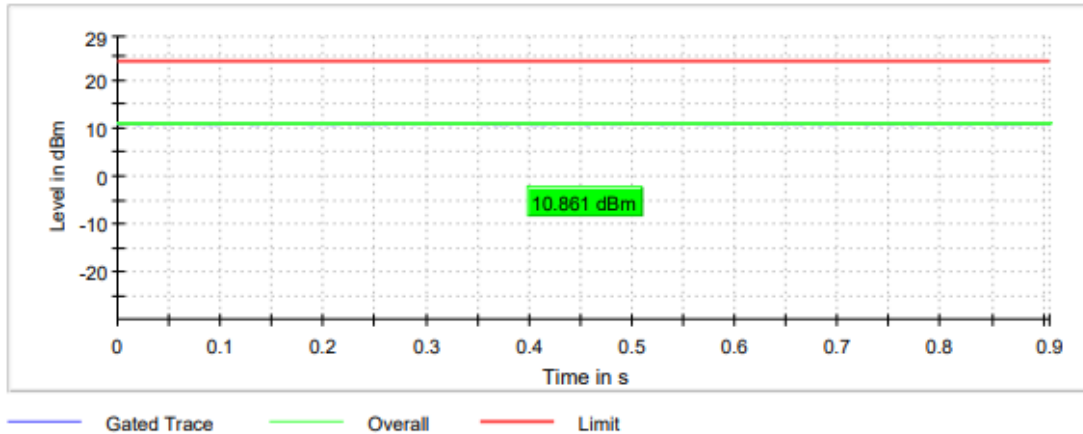

Middle Channel

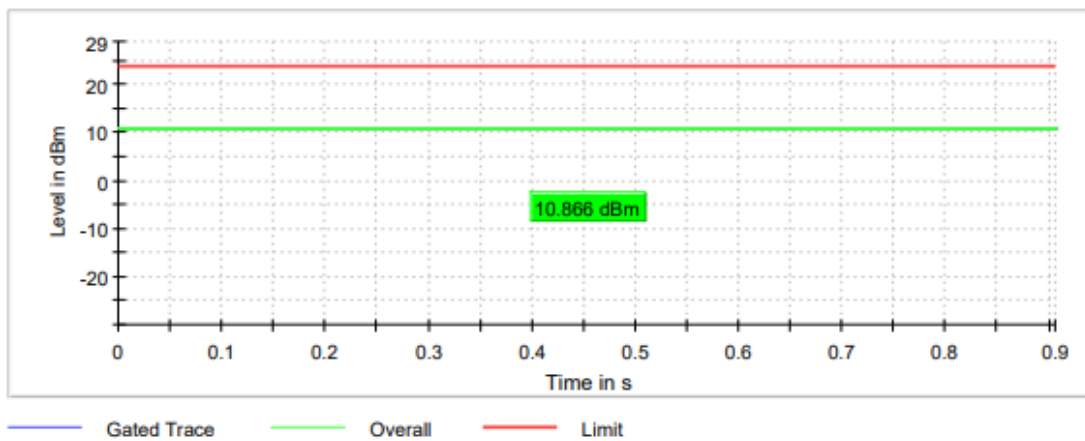

Highest Channel

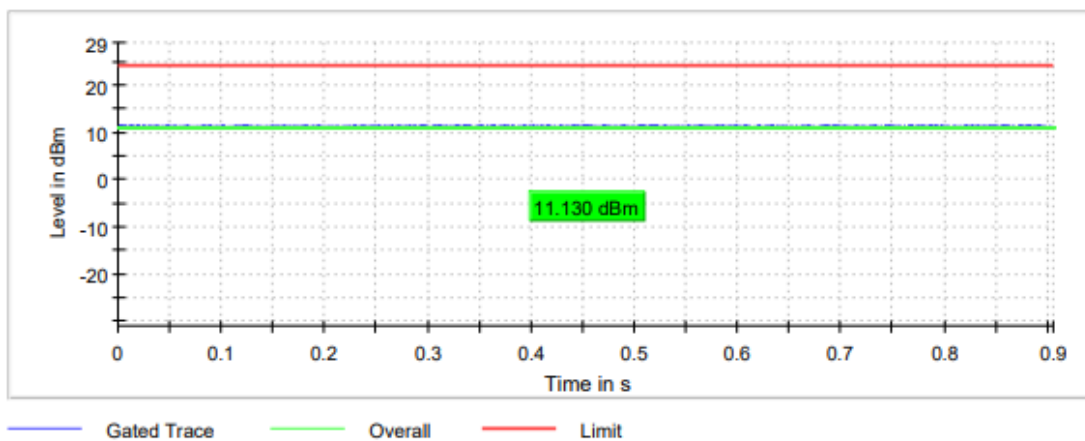

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#04 (ax mode MIMO Radio A+B)
TEST RESULTS:	PASS


Bandwidth: 20 MHz

Maximum declared antenna gain: -2.8 dBi


	Lowest frequency	Middle frequency	Highest frequency
	5180 MHz	5200 MHz	5240 MHz
Maximum conducted power (dBm)	13.713	13.441	13.988
Maximum EIRP power (dBm)	10.913	10.641	11.188

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

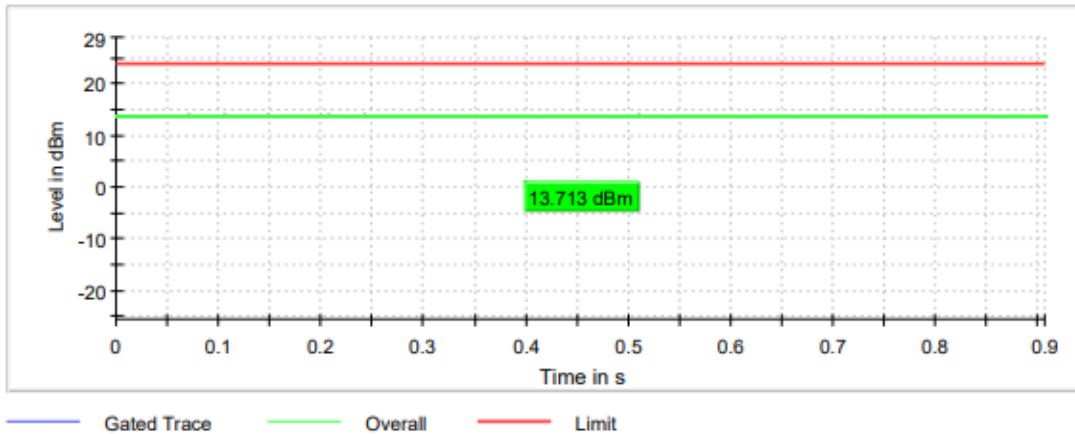


Middle Channel

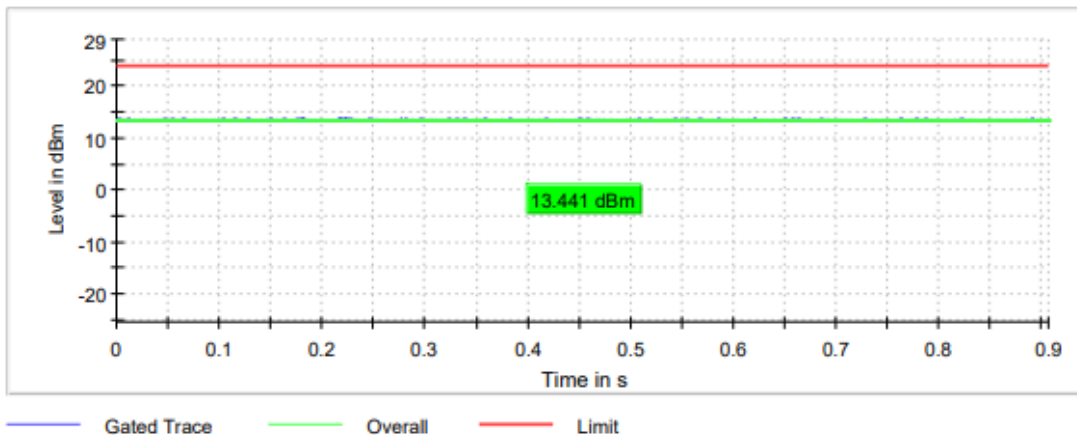

TEST RESULTS (Cont.):

CONDUCTED OUTPUT POWER

Highest Channel

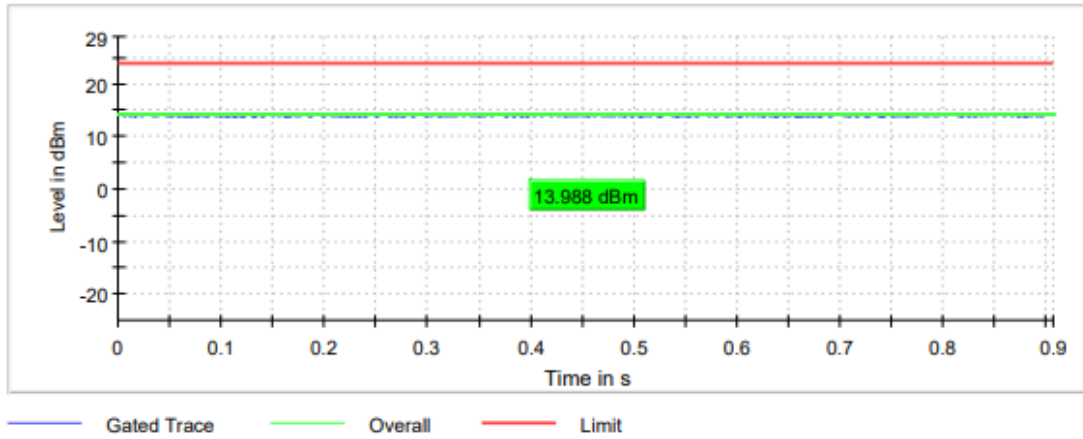

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#04 (ax mode SISO Radio A)
TEST RESULTS:	PASS


Bandwidth: 40 MHz

Maximum declared antenna gain: -2.8 dBi


	Lowest frequency	Highest frequency
	5190 MHz	5230 MHz
Maximum conducted power (dBm)	10.723	10.788
Maximum EIRP power (dBm)	7.923	7.988

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

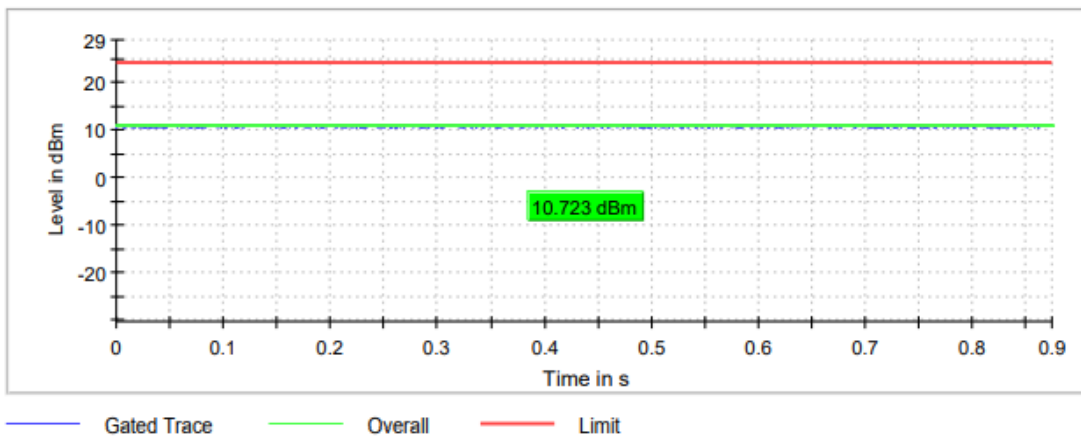

Highest Channel

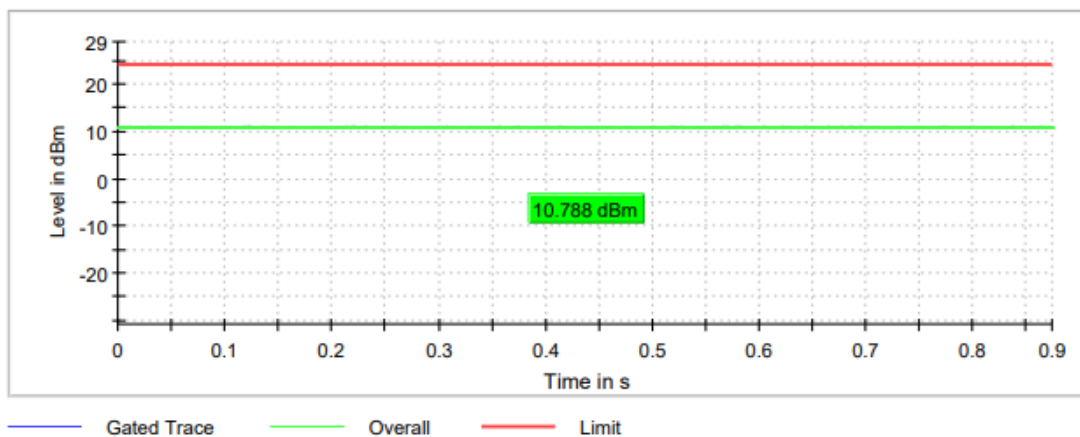

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#04 (ax mode SISO Radio B)
TEST RESULTS:	PASS


Bandwidth: 40 MHz

Maximum declared antenna gain: -2.8 dBi


	Lowest frequency	Highest frequency
	5190 MHz	5230 MHz
Maximum conducted power (dBm)	9.032	11.064
Maximum EIRP power (dBm)	6.232	8.264

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

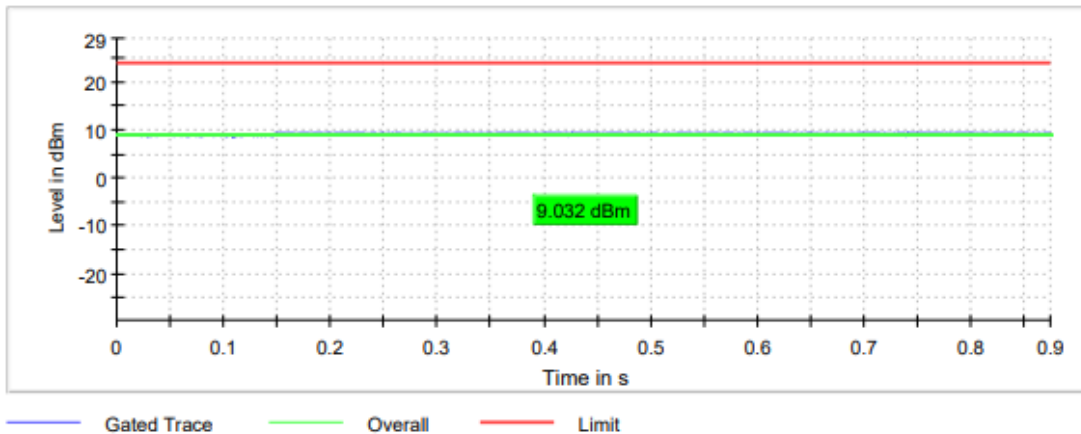

Highest Channel

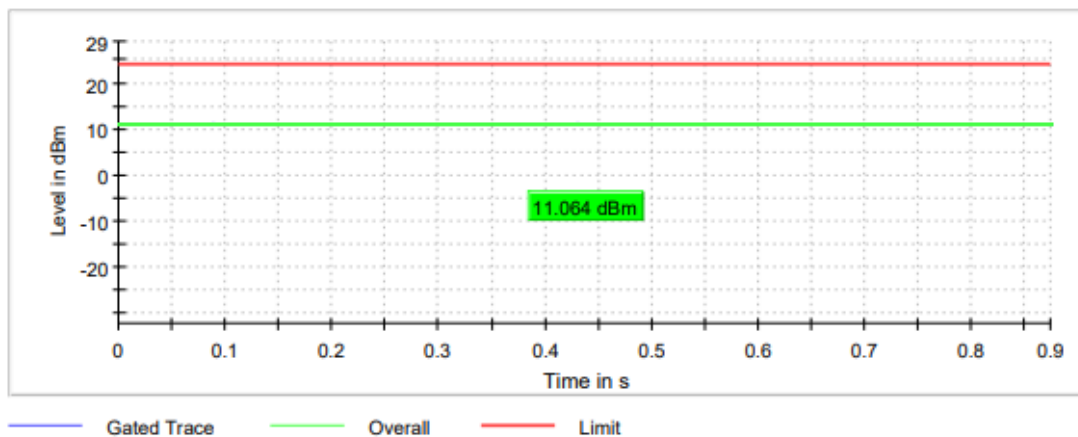

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#04 (ax mode MIMO Radio A+B)
TEST RESULTS:	PASS


Bandwidth: 40 MHz

Maximum declared antenna gain: -2.8 dBi


	Lowest frequency	Highest frequency
	5190 MHz	5230 MHz
Maximum conducted power (dBm)	13.768	13.958
Maximum EIRP power (dBm)	10.968	11.158

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

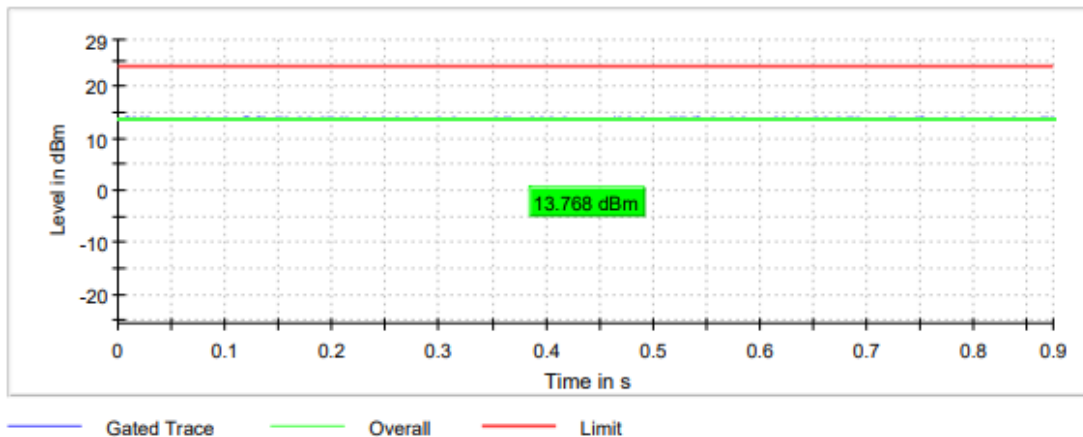

Highest Channel

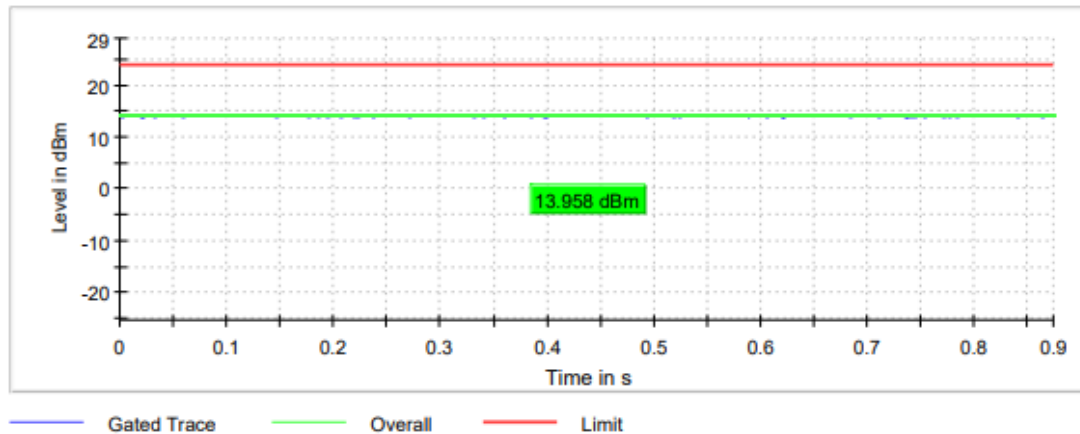

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#04 (ax mode SISO Radio A)
TEST RESULTS:	PASS


Bandwidth: 80 MHz

Maximum declared antenna gain: -2.8 dBi

	Lowest frequency 5210 MHz
Maximum conducted power (dBm)	9.915
Maximum EIRP power (dBm)	7.115

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

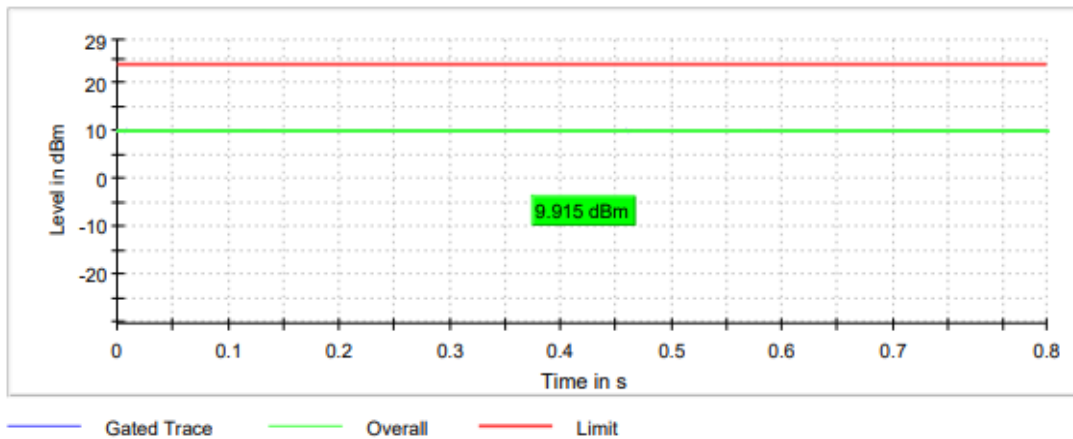

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#04 (ax mode SISO Radio B)
TEST RESULTS:	PASS


Bandwidth: 80 MHz

Maximum declared antenna gain: -2.8 dBi

	Lowest frequency 5210 MHz
Maximum conducted power (dBm)	9.935
Maximum EIRP power (dBm)	7.135

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

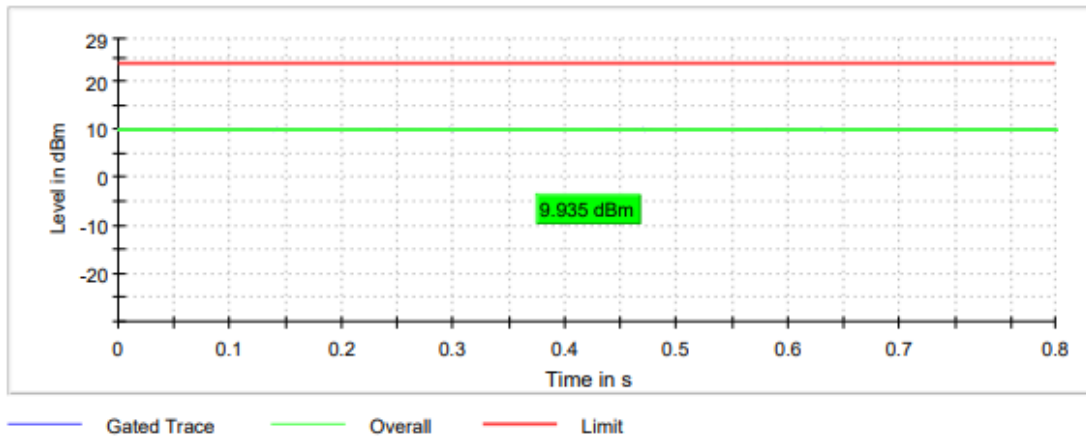

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#04 (ax mode MIMO Radio A+B)
TEST RESULTS:	PASS


Bandwidth: 80 MHz

Maximum declared antenna gain: -2.8 dBi

	Lowest frequency 5210 MHz
Maximum conducted power (dBm)	12.647
Maximum EIRP power (dBm)	9.847

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

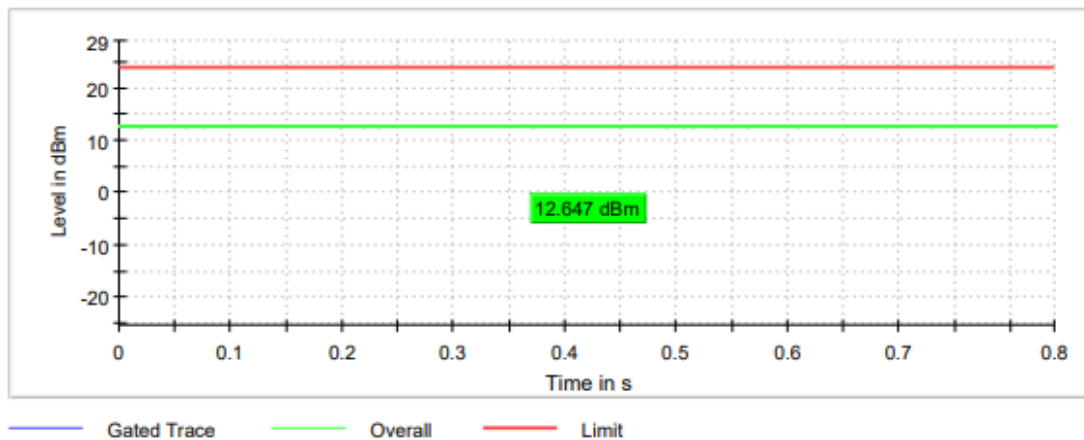

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#05 (ac mode Beam forming)
TEST RESULTS:	PASS

Bandwidth: 20 MHz


Maximum declared antenna gain: -2.8 dBi

Directional Gain: +0.2 dBi


	Lowest frequency 5180 MHz	Middle frequency 5200 MHz	Highest frequency 5240 MHz
Maximum conducted power (dBm)	14.676	14.565	15.191
Maximum EIRP power (dBm)	14.876	14.765	15.391

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

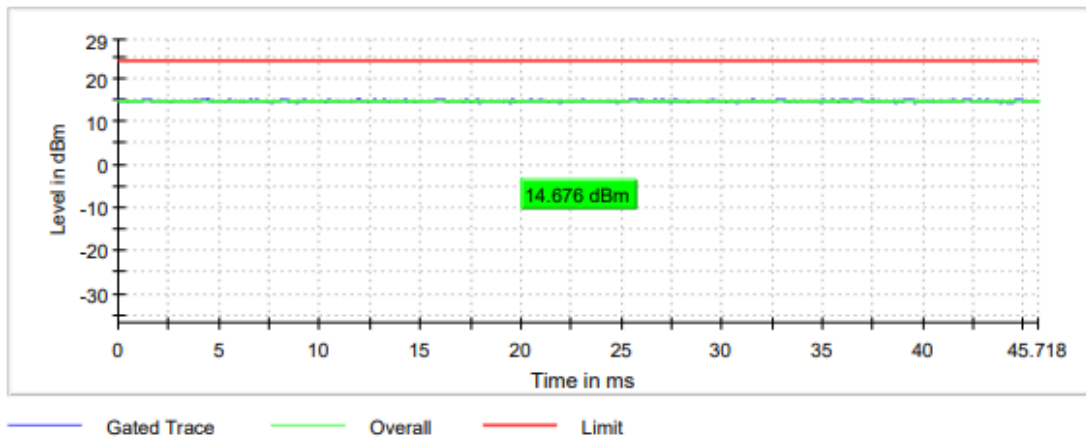


Middle Channel

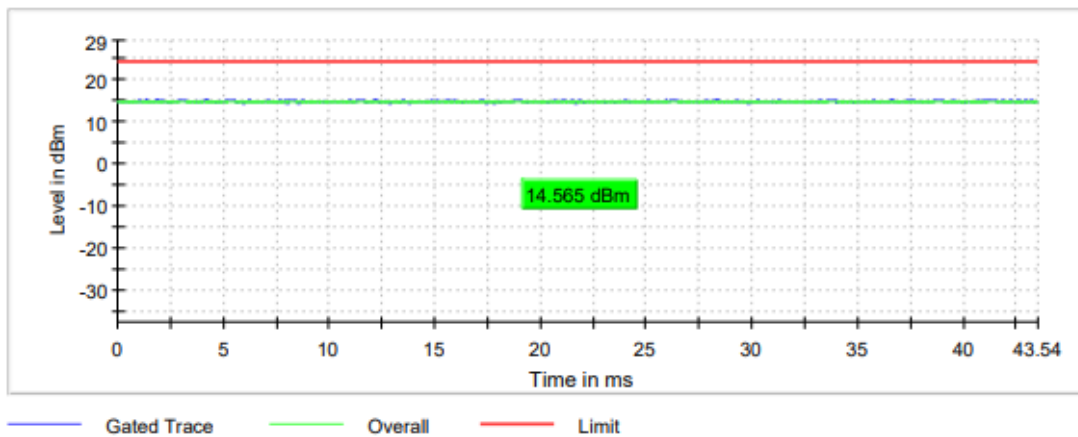

TEST RESULTS (Cont.):	
------------------------------	--

High Channel

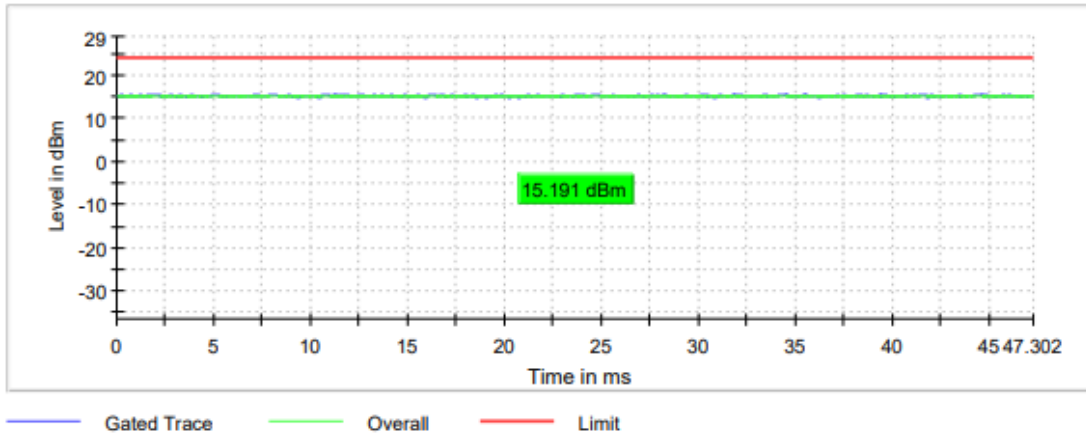

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#05 (ac mode Beam forming)
TEST RESULTS:	PASS

Bandwidth: 40 MHz


Maximum declared antenna gain: -2.8 dBi

Directional Gain: +0.2 dBi


	Lowest frequency	Highest frequency
	5190 MHz	5230 MHz
Maximum conducted power (dBm)	11.427	12.049
Maximum EIRP power (dBm)	11.627	12.249

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

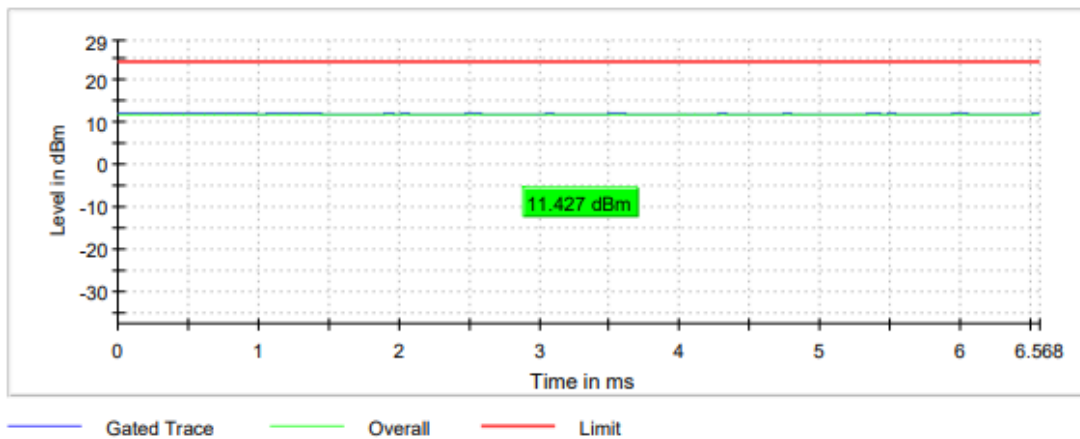

Highest Channel

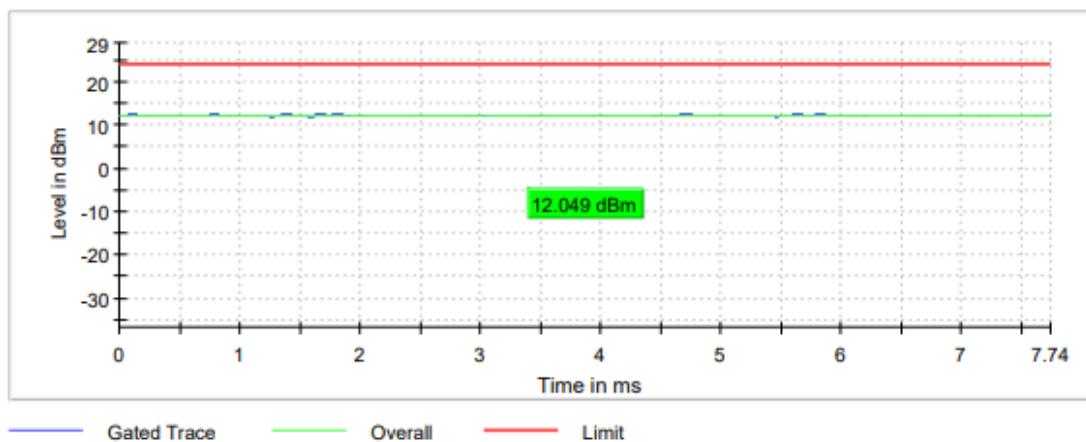

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#05 (ac mode Beam forming)
TEST RESULTS:	PASS

Bandwidth: 80 MHz


Maximum declared antenna gain: -2.8 dBi

Directional Gain: +0.2 dBi

	Lowest frequency 5210 MHz
Maximum conducted power (dBm)	12.221
Maximum EIRP power (dBm)	12.421

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

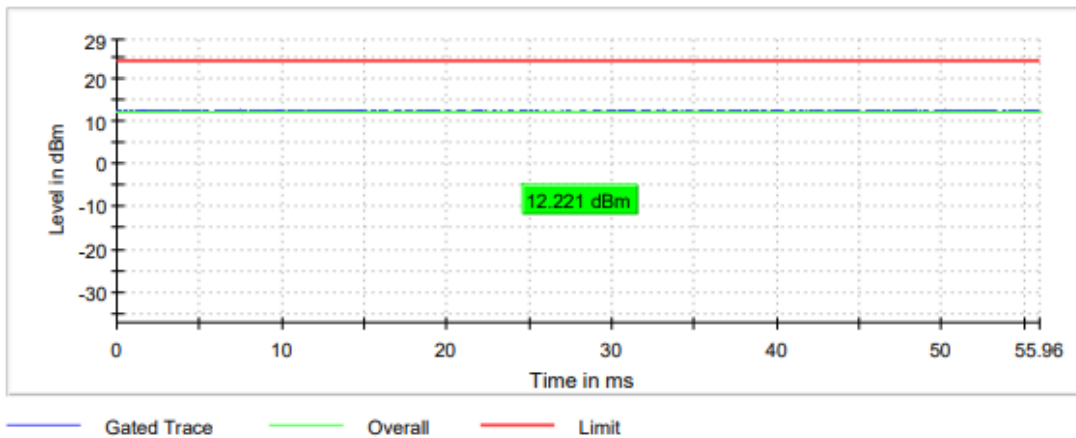

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#06 (ax mode Beam forming)
TEST RESULTS:	PASS

Bandwidth: 20 MHz


Maximum declared antenna gain: -2.8 dBi

Directional Gain: +0.2 dBi


	Lowest frequency	Middle frequency	Highest frequency
	5180 MHz	5200 MHz	5240 MHz
Maximum conducted power (dBm)	12.419	12.139	12.772
Maximum EIRP power (dBm)	12.619	12.339	12.972

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Lowest Channel

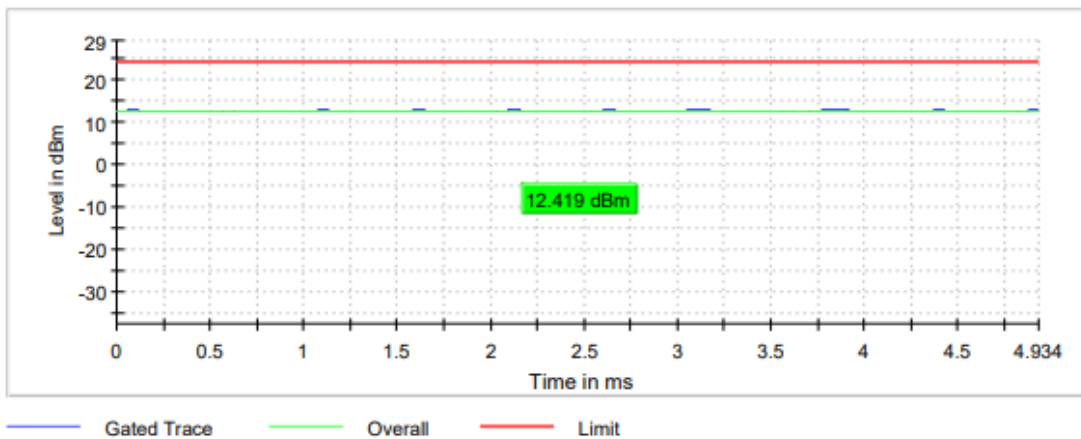

Middle Channel

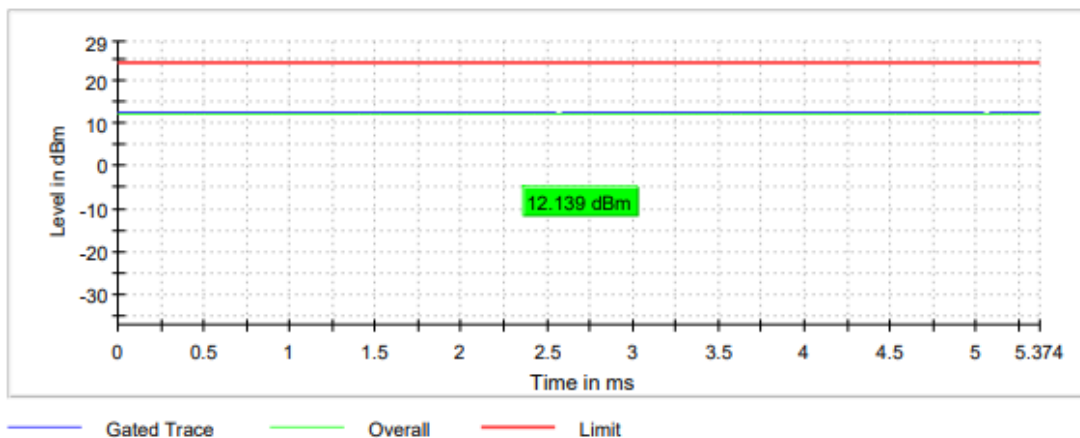

TEST RESULTS (Cont.):

High Channel

