

# **TESTREPORT**

# No.I18N00939-EMC

for

**Spectralink Corp** 

Wifi/BT handset

Model Name: 9540

FCC ID: IYG95XX

IC: 2128B-95XX

**Hardware Version: PIO** 

Software Version: vF03

Issued Date: 2018-09-21

Designation Number: CN1210 ISED Assigned Code: 23289

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of SAICT.

#### **Test Laboratory:**

Shenzhen Academy of Information and Communications Technology

Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China 518026.

Tel:+86(0)755-33322000, Fax:+86(0)755-33322001Email:yewu@caict.ac.cn.www.cszit.com



# **REPORT HISTORY**

| Report Number | Revision | Description | Issue Date |
|---------------|----------|-------------|------------|
| I18N00939-EMC | Rev.0    | 1st edition | 2018-09-21 |



# **CONTENTS**

| 1.   | TEST LABORATORY  | 4    |
|------|--|------|
| 1.1. | TESTINGLOCATION  | 4    |
| 1.2. | TESTINGENVIRONMENT                                     | 4    |
| 1.3. | PROJECT DATA   | 4    |
| 1.4. | SIGNATURE  | 4    |
| 2.   | CLIENTINFORMATION                                      | 5    |
| 2.1. | APPLICANT INFORMATION                                  | 5    |
| 2.2. | MANUFACTURER INFORMATION                               | 5    |
| 3.   | EQUIPMENT UNDERTEST (EUT) AND ANCILLARY EQUIPMENT (AE) | 6    |
| 3.1. | ABOUT EUT  | 6    |
| 3.2. | INTERNAL IDENTIFICATION OF EUT                         | 6    |
| 3.3. | INTERNAL IDENTIFICATION OF AE                          | 6    |
| 3.4. | EUT SET-UPS  | 7    |
| 4.   | REFERENCE DOCUMENTS                                    | 8    |
| 4.1. | REFERENCE DOCUMENTS FOR TESTING                        | 8    |
| 5.   | LABORATORY ENVIRONMENT                                 | 9    |
| 6.   | SUMMARY OF TEST RESULTS                                | . 10 |
| 7.   | TEST FACILITIES UTILIZED                               | 11   |
| AN   | NEX A: MEASUREMENT RESULTS                             | . 12 |



# 1. Test Laboratory

## 1.1. TestingLocation

Company Name:

Shenzhen Academy of Information and Communications

Technology

Address:

Building G, Shenzhen International Innovation Center, No.1006

Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China

Postal Code:

518026

Telephone:

+86(0)755-33322000

Fax:

+86(0)755-33322001

## 1.2. TestingEnvironment

Normal Temperature:

15-35℃

Relative Humidity:

20-75%

# 1.3. Project data

Testing Start Date:

2018-08-09

Testing End Date:

2018-09-20

#### 1.4. Signature

Liang Yong

(Prepared this test report)

Zhàng Yunzhuan

(Reviewed this test report)

Cao Junfei

Director of the laboratory

(Approvedthis test report)



# 2. ClientInformation

### 2.1. Applicant Information

Company Name: Spectralink Corp

Address: 2560 55th Street Boulder, CO 80301 USA

# 2.2. Manufacturer Information

Company Name: Spectralink Corp

Address: 2560 55th Street Boulder, CO 80301 USA



# 3. Equipment UnderTest (EUT) and Ancillary Equipment (AE)

#### 3.1. About EUT

Description Wifi/BT handset

 Model Name
 9540

 FCC ID
 IYG95XX

 IC number
 2128B-95XX

Condition of EUT as received No obvious damage in appearance

The Equipment Under Test (EUT) are a model of Wifi/BT handset with integrated antenna.

The EUT supports GPRS service and EGPRS service.

Remark: The above EUT's information is declared by manufacturer. Please refer to the specifications or user's manual for more detailed information.

Note: The Wifi/BT handset 9540 manufactured by Spectralink Corp. According to the declaration of changes, Radiated Emissions test needs to been performed. else results are cited from the initial model. The report number for initial model is I18N00940-EMC

### 3.2. Internal Identification of EUT

**EUT ID\*** SN or IMEI

EUT1 357023090001067

### 3.3. Internal Identification of AE

| AE ID* | Description    | SN |
|--------|----------------|----|
| AE1    | Battery        | /  |
| AE2    | Travel charger | /  |
| AE3    | USB cable      | /  |

AE1-1

Model Rechargeable Li-ion Polymer Battery

Manufacturer Zhuhai City Gushine Electronic Technology Co., Ltd.

Capacitance 3020 mAh Nominal Voltage 3.85V

AE1-2

Model Rechargeable Li-ion Polymer Battery

Manufacturer Smart Power Electronic (huizhou) Co.,Ltd.

Capacitance 60 mAh Nominal Voltage 3.7V

AE2

Model ASUC71w-050912300

Manufacturer Aquil Star Precision Industrial (ShenZhen) Co., Ltd

S/N /

<sup>\*</sup>EUT ID: is used to identify the test sample in the lab internally.



AE3-1

Model Type C 3.0 C13021

Manufacturer Juwei Electronics Co., Ltd.

AE3-2

Model Type C 3.0 XG-US008

Manufacturer Xunguang Electronics Co., Ltd.

\*AE ID: is used to identify the test sample in the lab internally.

Note: 60mAh Back up battery just for maintenance of system data and keep silence, cannot support system normal working

AE2: There is just one internal circuit of charger, and the plug of the charger can be replaced to meet worldwide country's requirement.

### 3.4. EUT set-ups

| EUT set-up No. | Combination of EUT and AE   | Remarks       |
|----------------|-----------------------------|---------------|
| Set.1          | EUT1+ AE1-1+AE1-2+AE2+AE3-1 | Charging mode |
| Set.2          | EUT1+ AE1-1+AE1-2+AE2+AE3-2 | Charging mode |
| Set.3          | EUT1+ AE1-1+AE1-2+ AE3-1    | USB mode      |
| Set.4          | EUT2+ AE1-1+AE1-2+ AE3-2    | USB mode      |



# 4. Reference Documents

# 4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

| Reference                 | Title  | Version              |
|---------------------------|--|----------------------|
| FCC Part 15,<br>Subpart B | Radio frequency devices                                | 10-1-2017<br>Edition |
|                           | Methods of Measurement of Radio-Noise Emissions from   |                      |
| ANSI C63.4                | Low-Voltage Electrical and Electronic Equipment in the | 2014                 |
|                           | Range of 9 kHz to 40 GHz                               |                      |
| 1050,000                  | Information Technology Equipment(ITE)-Limits and       | laava C              |
| ICES-003                  | methods of measurement                                 | Issue 6              |



# 5. LABORATORY ENVIRONMENT

Semi-anechoic chamber did not exceed following limits along the EMC testing:

|                                   | 8 8   |
|-----------------------------------|---|
| Temperature                       | Min. = 15 °C, Max. = $35$ °C                  |
| Relative humidity                 | Min. = 15 %, Max. = 75 %                      |
| Shielding effectiveness           | 0.014MHz-1MHz,>60dB;                          |
|                                   | 1MHz-18000MHz,>90dB                           |
| Electrical insulation             | >2MΩ  |
| Ground system resistance          | $<4\Omega$                                    |
| Normalised site attenuation (NSA) | $<\pm4$ dB, 3 m distance, from 30 to 1000 MHz |

**Shield room** did not exceed following limits along the EMC testing:

| Temperature                               | Min. = 15 °C, Max. = 30 °C |
|---|----------------------------|
| Relative humidity Min. =20 %, Max. = 75 % |                            |
| Shielding effectiveness                   | 0.014MHz-1MHz,>60dB;       |
|   | 1MHz-10000MHz,>90dB        |
| Electrical insulation                     | >2MΩ                       |
| Ground system resistance                  | $<4\Omega$                 |

Fully-anechoic chamber did not exceed following limits along the EMC testing:

| Temperature                     | Min. = 15 °C, Max. = 35°C               |
|---------------------------------|---|
| Relative humidity               | Min. = 15 %, Max. = 75 %                |
| Shielding effectiveness         | 0.014MHz-1MHz,>60dB;                    |
|                                 | 1MHz-18000MHz,>90dB                     |
| Electrical insulation           | >2MΩ                                    |
| Ground system resistance        | $<4\Omega$                              |
| VoltageStandingWaveRatio (VSWR) | ≤ 6 dB, from 1 to 18GHz, 3 m distance   |
| Uniformity of field strength    | Between 0 and 6 dB, from 80 to 6000 MHz |



# 6. SUMMARY OF TEST RESULTS

| Abbreviations used in this clause: |                |
|------------------------------------|----------------|
| Р                                  | Pass           |
| NA                                 | Not applicable |
| F                                  | Fail           |

| Items | Test Name         | Clause in FCC rules | Clause in IC rules | Section in this report | Verdict |
|-------|-------------------|---------------------|--------------------|------------------------|---------|
| 1     | Radiated Emission | 15.109(a)           | Section 5          | A.1                    | Р       |



# 7. Test Facilities Utilized

| NO. | NAME                 | TYPE         | SERIES     | PRODUCER     | CALDUE     | CAL     |
|-----|----------------------|--------------|------------|--------------|------------|---------|
|     |                      |              | NUMBER     |              | DATE       | PERIOD  |
| 1.  | Test Receiver        | ESR7         | 101676     | R&S          | 2018.11.29 | 1 year  |
| 2.  | Spectrum Analyzer    | FSV40        | 101192     | R&S          | 2019.05.21 | 1 year  |
| 3.  | BiLog Antenna        | 3142E        | 00224831   | ETS-Lindgren | 2021.05.17 | 3 years |
| 4.  | Horn Antenna         | 3117         | 00066577   | ETS-lindgren | 2019.04.05 | 3 years |
| 5.  | Universal Radio      | CMU200       | 114545     | R&S          | 2019.05.17 | 1 year  |
|     | Communication Tester | CIVIOZOO     | 114545     | κασ          | 2019.05.17 | i yeai  |
| 6.  | PC                   | ThinkPadE480 | PF-0Z56NV  | Lenovo       | /          | /       |
| 7.  | Printer              | P1008        | VNF6C12491 | HP           | /          | /       |
| 8.  | Mouse                | MOEUUOA      | 44NY517    | Lenovo       | /          | /       |
| 9.  | Chamber              | FACT3-2.0    | 1285       | ETS-Lindgren | 2020.07.20 | 3 years |



## **ANNEX A: MEASUREMENT RESULTS**

### A.1 Radiated Emission (§15.109(a))

Reference

FCC: CFR Part 15.109(a) IC: ICES-003 section 6.2

#### A.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator (USB mode of MS and charging mode of MS) at a distance of 3 meters is tested. Tested in accordance with the procedures of ANSI C63.4 -2014, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

#### A.1.2 EUT Operating Mode:

**MP3 mode:** The EUT is keeping on playing mp3. **Camera mode:** The EUT is keeping on taking photos.

Charging mode: The MS is synchronized to SS, and able to respond to paging messages and

incoming call. An established call has been released. The MS is connected to a charger.

**USB mode:** The model of the PC is Lenovo ThinkPad E480, and the serial number of the PC is PF-0Z56NV. The software is used to let the PC keep on copying data to MS, reading and erasing

the data after copy action was finished.

#### A.1.3 Measurement Limit

Limit from CFR Part 15.109(a)

| Frequency range | Field strength limit (µV/m) |     |      |  |
|-----------------|-----------------------------|-----|------|--|
| (MHz)           | Quasi-peak Average          |     | Peak |  |
| 30-88           | 100                         |     |      |  |
| 88-216          | 150                         |     |      |  |
| 216-960         | 200                         |     |      |  |
| 960-1000        | 500                         |     |      |  |
| >1000           |                             | 500 | 5000 |  |

<sup>\*</sup>Note: The original limit is defined at 10m test distance. This limit is calculated according to CISPR requirements.


#### A.1.4 Test Condition

| Frequency of emission (MHz) | RBW/VBW               | Sweep Time(s) |
|-----------------------------|-----------------------|---------------|
| 30-1000                     | 120kHz (IF bandwidth) | 5             |
| Above 1000                  | 1MHz/3MHz             | 15            |




# A.1.5Test set-up:

### 30MHz-1GHz

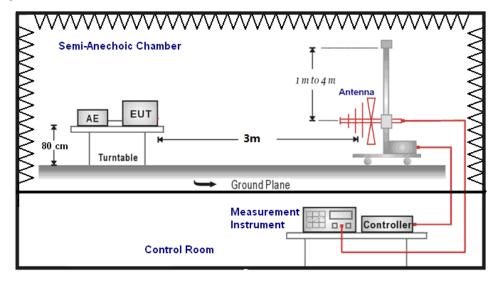

#### 1GHz-18GHz

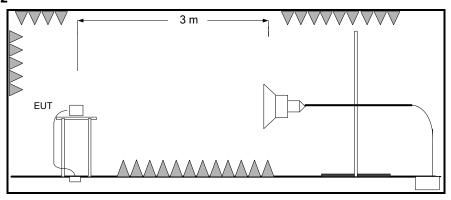



#### A.1.6 Measurement Results

A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

Result= $P_{Mea}+A_{Rpl}=P_{Mea}+G_{A}+G_{PL}$ 

Where

G<sub>A</sub>: Antenna factor of receive antenna

G<sub>PL</sub>:PathLoss

P<sub>Mea</sub>: Measurement result on receiver.

Note: the result contains vertical part and Horizontal part

RE Measurement uncertainty:30M-1GHz: 4.90dB (k=2);

1GHz-18GHz: 5.12 dB (k=2)

#### Set.1 MP3 mode with Charging mode / Peak detector

|                | <u> </u>        |          |            |          |        |                  |
|----------------|-----------------|----------|------------|----------|--------|------------------|
| [              | Booult/dBu\//m\ | Limit    | Morgin(dD) | Dolority | ARpl   | P <sub>Mea</sub> |
| Frequency(MHz) | Result(dBuV/m)  | (dBµV/m) | Margin(dB) | Polarity | (dB/m) | (dBµV)           |
| 2862.5         | 54.61           | 74       | 19.39      | Н        | 20.4   | 34.21            |
| 2994           | 53.29           | 74       | 20.71      | Н        | 21.5   | 31.79            |
| 12981          | 52.84           | 74       | 21.16      | Н        | 20.1   | 32.74            |
| 14914.5        | 53.32           | 74       | 20.68      | Н        | 20.7   | 32.62            |
| 16553.5        | 55.35           | 74       | 18.65      | Н        | 22.4   | 32.95            |
| 17813          | 53.74           | 74       | 20.26      | Н        | 22.8   | 30.94            |

#### Set.1 MP3 mode with Charging mode / Average detector

| Fraguenov/MHz) | Posult(dPu\//m) | Limit    | Margin(dP) | Dolority | ARpl   | P <sub>Mea</sub> (dBµV) 21.27 20.28 21.27 21.44 20.79 |
|----------------|-----------------|----------|------------|----------|--------|---|
| Frequency(MHz) | Result(dBuV/m)  | (dBµV/m) | Margin(dB) | Polarity | (dB/m) | (dBµV)  |
| 2791.5         | 42.27           | 54       | 11.73      | Н        | 21     | 21.27   |
| 2998           | 41.98           | 54       | 12.02      | Н        | 21.7   | 20.28   |
| 13047.5        | 41.37           | 54       | 12.63      | Н        | 20.1   | 21.27   |
| 14905          | 42.24           | 54       | 11.76      | Н        | 20.8   | 21.44   |
| 16674.5        | 42.89           | 54       | 11.11      | Н        | 22.1   | 20.79   |
| 17950.5        | 42.71           | 54       | 11.29      | Н        | 23.5   | 19.21   |



### Set.2 Camera mode with Charging mode / Peak detector

| Frequency(MHz) | Result(dBuV/m) | Limit<br>(dBµV/m) | Margin(dB) | Polarity | ARpl<br>(dB/m) | P <sub>Mea</sub><br>(dBµV) |
|----------------|----------------|-------------------|------------|----------|----------------|----------------------------|
| 2820.5         | 54.12          | 74                | 19.88      | Н        | 20.3           | 33.82                      |
| 2986           | 53.54          | 74                | 20.46      | Н        | 21.5           | 32.04                      |
| 12637.5        | 52.73          | 74                | 21.27      | Н        | 20             | 32.73                      |
| 14901.5        | 52.95          | 74                | 21.05      | Н        | 20.8           | 32.15                      |
| 16646.5        | 54.68          | 74                | 19.32      | Н        | 22.4           | 32.28                      |
| 17898          | 53.89          | 74                | 20.11      | Н        | 24             | 29.89                      |

### Set.2 Camera mode with Charging mode / Average detector

| Fraguenov/MHz) | Popult(dPu)//m) | Limit    | Margin(dD)   | Dolority  | ARpl   | P <sub>Mea</sub> |
|----------------|-----------------|----------|--------------|---|--------|------------------|
| Frequency(MHz) | Result(dBuV/m)  | (dBµV/m) | iviargin(ub) | Polarity     (dB/i       11.68     H     20.       11.9     H     21.       12.62     H     20.       12.51     H     20.       11.79     H     20. | (dB/m) | (dBµV)           |
| 2793.5         | 42.32           | 54       | 11.68        | Н   | 20.9   | 21.42            |
| 2999.5         | 42.1            | 54       | 11.9         | Н   | 21.8   | 20.3             |
| 12637.5        | 41.38           | 54       | 12.62        | Н   | 20     | 21.38            |
| 13042.5        | 41.49           | 54       | 12.51        | Н   | 20.1   | 21.39            |
| 14915          | 42.21           | 54       | 11.79        | Н   | 20.7   | 21.51            |
| 16639          | 43.01           | 54       | 10.99        | Н   | 22.5   | 20.51            |
| 17954          | 42.56           | 54       | 11.44        | Н   | 23.4   | 19.16            |

#### Set.3 USB mode / Peak detector

| Frequency(MHz) | Result(dBuV/m) | Limit<br>(dBµV/m) | Margin(dB) | Polarity | ARpl<br>(dB/m) | P <sub>Mea</sub><br>(dBµV) |
|----------------|----------------|-------------------|------------|----------|----------------|----------------------------|
| 2786.5         | 53.9           | 74                | 20.1       | Н        | 20.8           | 33.1                       |
| 2995           | 53.62          | 74                | 20.38      | Н        | 21.6           | 32.02                      |
| 13077.5        | 52.76          | 74                | 21.24      | Н        | 20.2           | 32.56                      |
| 14953          | 53.01          | 74                | 20.99      | Н        | 20.4           | 32.61                      |
| 16646.5        | 54.53          | 74                | 19.47      | Н        | 22.4           | 32.13                      |
| 17941          | 53.59          | 74                | 20.41      | Н        | 23.6           | 29.99                      |

### Set.3 USB mode / Average detector

| Fragues ov (MHz) | Result(dBuV/m)   | t(dBuV/m) Limit Margin(dB) Polarit | Polarity   | ARpl     | P <sub>Mea</sub> |        |
|------------------|------------------|------------------------------------|------------|----------|------------------|--------|
| Frequency(MHz)   | Result(ubuv/III) | (dBµV/m)                           | Margin(ub) | Polatity | (dB/m)           | (dBµV) |
| 2789             | 42.32            | 54                                 | 11.68      | Η        | 21               | 21.32  |
| 2999.5           | 42.11            | 54                                 | 11.89      | Н        | 21.8             | 20.31  |
| 13027.5          | 41.21            | 54                                 | 12.79      | Н        | 20.1             | 21.11  |
| 14902.5          | 42.04            | 54                                 | 11.96      | Н        | 20.8             | 21.24  |
| 16637            | 42.58            | 54                                 | 11.42      | Н        | 22.5             | 20.08  |
| 17896            | 42.98            | 54                                 | 11.02      | Н        | 24               | 18.98  |



#### Set.4 USB mode / Peak detector

| Fragues (MUz)  | Result(dBuV/m)   | Limit    | Margin(dP)  | Polarity | ARpl   | P <sub>Mea</sub> |
|----------------|------------------|----------|---|----------|--------|------------------|
| Frequency(MHz) | Result(ubuv/III) | (dBµV/m) | Margin(dB) Polarity ((  21.09 H  20.75 H  20.99 H  21.34 H  20.08 H | (dB/m)   | (dBµV) |                  |
| 2722.5         | 52.91            | 74       | 21.09   | Н        | 19     | 33.91            |
| 2998.5         | 53.25            | 74       | 20.75   | Н        | 21.8   | 31.45            |
| 14663          | 53.01            | 74       | 20.99   | Н        | 20.7   | 32.31            |
| 14932.5        | 52.66            | 74       | 21.34   | Н        | 20.5   | 32.16            |
| 16597          | 53.92            | 74       | 20.08   | Н        | 22.9   | 31.02            |
| 17839          | 53.22            | 74       | 20.78   | Н        | 23.2   | 30.02            |

### Set.4 USB mode / Average detector

| Fraguenov(MHz) | Result(dBuV/m)   | Limit    | Margin(dP) | n(dB) Polarity | ARpl   | P <sub>Mea</sub> |
|----------------|------------------|----------|------------|----------------|--------|------------------|
| Frequency(MHz) | Result(dbdv/iii) | (dBµV/m) | Margin(dB) | Polarity       | (dB/m) | (dBµV)           |
| 2770           | 42.3             | 54       | 11.7       | Н              | 21     | 21.3             |
| 2999.5         | 42               | 54       | 12         | Н              | 21.8   | 20.2             |
| 14495          | 41.87            | 54       | 12.13      | Н              | 20.2   | 21.67            |
| 14898          | 42.07            | 54       | 11.93      | Н              | 20.8   | 21.27            |
| 16621.5        | 42.92            | 54       | 11.08      | Н              | 22.7   | 20.22            |
| 17895          | 42.64            | 54       | 11.36      | Н              | 23.9   | 18.74            |

Note: The measurement result of Set.1, Set.2, Set.3, and Set.4 showed here are worst cases of combinations of different batteries and USB cables.



# MP3 mode with Charging mode: Set 1

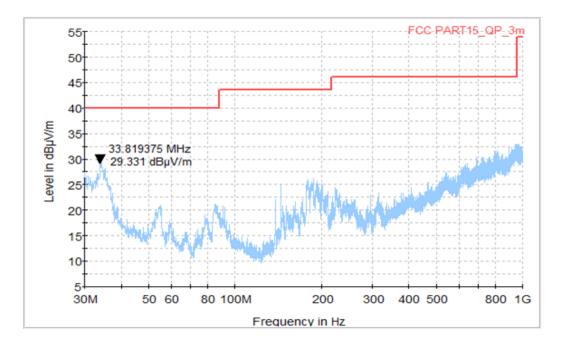


Figure A.1 Radiated Emission from 30MHz to 1GHz

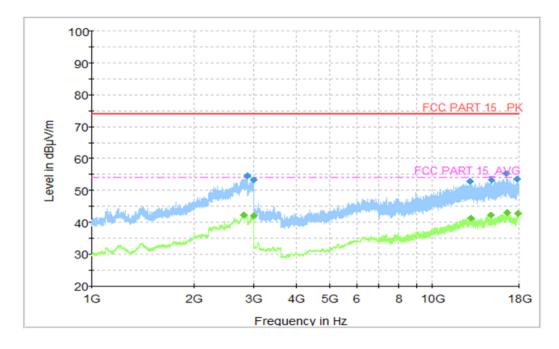


Figure A.2 Radiated Emission from 1GHz to 18GHz



# Camera mode with Charging mode: Set 2

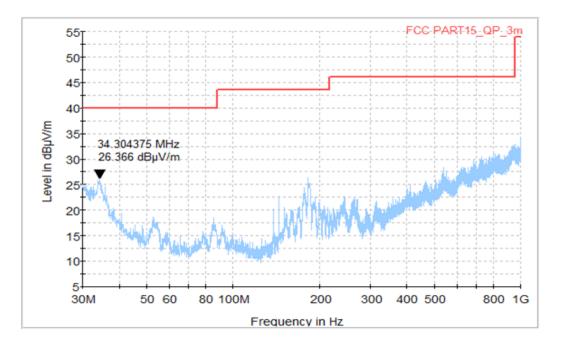


Figure A.1 Radiated Emission from 30MHz to 1GHz

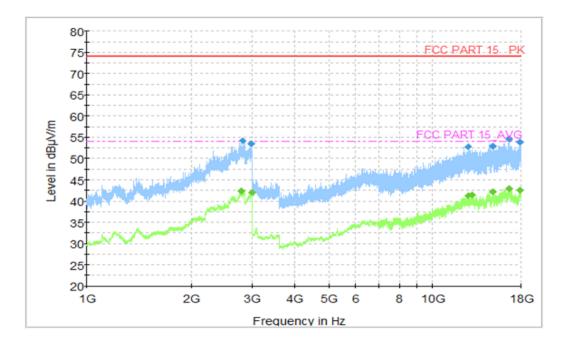


Figure A.2 Radiated Emission from 1GHz to 18GHz



**USB mode: Set3** 

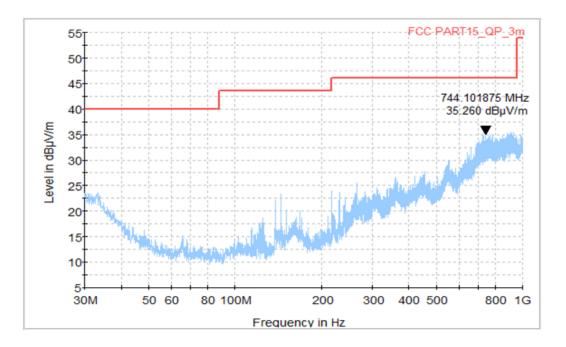


Figure A.1 Radiated Emission from 30MHz to 1GHz

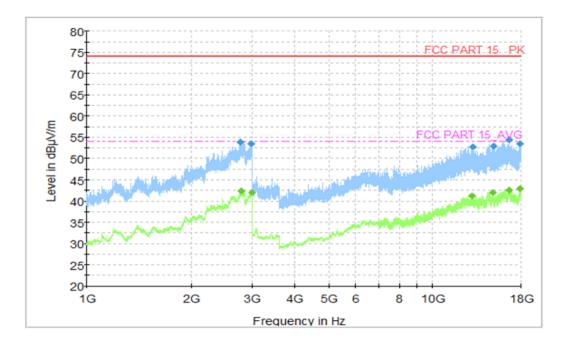


Figure A.2 Radiated Emission from 1GHz to 18GHz



USB mode: Set 4

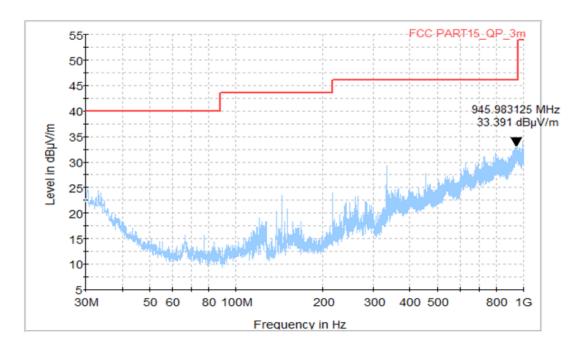


Figure A.1 Radiated Emission from 30MHz to 1GHz

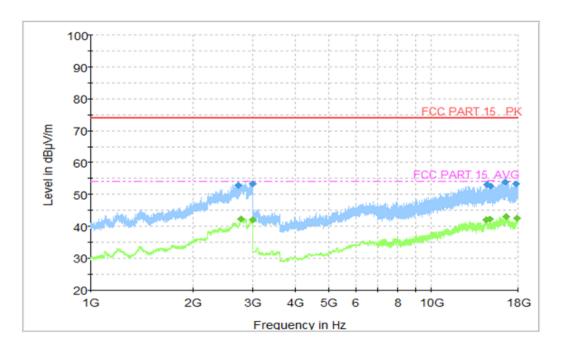


Figure A.2 Radiated Emission from 1GHz to 18GHz
\*\*\*END OF REPORT\*\*\*