


|                             |                  |   |                                       |
|-----------------------------|------------------|---|---------------------------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) | <b>Channel</b>                                      | CH 1 : 5955 MHz                       |
| <b>Frequency Range</b>      | 150kHz ~ 30MHz   | <b>Detector Function &amp; Resolution Bandwidth</b> | Quasi-Peak (QP) / Average (AV), 9 kHz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>                     | 25°C, 68% RH                          |
| <b>Tested By</b>            | Tom Yang         |   |                                       |

| Phase Of Power : Neutral (N) |                 |                        |                      |       |                       |       |              |       |             |        |
|------------------------------|-----------------|------------------------|----------------------|-------|-----------------------|-------|--------------|-------|-------------|--------|
| No                           | Frequency (MHz) | Correction Factor (dB) | Reading Value (dBuV) |       | Emission Level (dBuV) |       | Limit (dBuV) |       | Margin (dB) |        |
|                              |                 |                        | Q.P.                 | AV.   | Q.P.                  | AV.   | Q.P.         | AV.   | Q.P.        | AV.    |
| 1                            | 0.15117         | 10.01                  | 32.37                | 19.54 | 42.38                 | 29.55 | 65.94        | 55.94 | -23.56      | -26.39 |
| 2                            | 0.22795         | 10.02                  | 24.18                | 10.71 | 34.20                 | 20.73 | 62.52        | 52.52 | -28.32      | -31.79 |
| 3                            | 0.58157         | 10.04                  | 27.82                | 18.94 | 37.86                 | 28.98 | 56.00        | 46.00 | -18.14      | -17.02 |
| 4                            | 0.91775         | 10.06                  | 14.67                | 2.53  | 24.73                 | 12.59 | 56.00        | 46.00 | -31.27      | -33.41 |
| 5                            | 14.23715        | 10.61                  | 20.47                | 13.35 | 31.08                 | 23.96 | 60.00        | 50.00 | -28.92      | -26.04 |
| 6                            | 25.81529        | 10.89                  | 24.71                | 18.43 | 35.60                 | 29.32 | 60.00        | 50.00 | -24.40      | -20.68 |

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

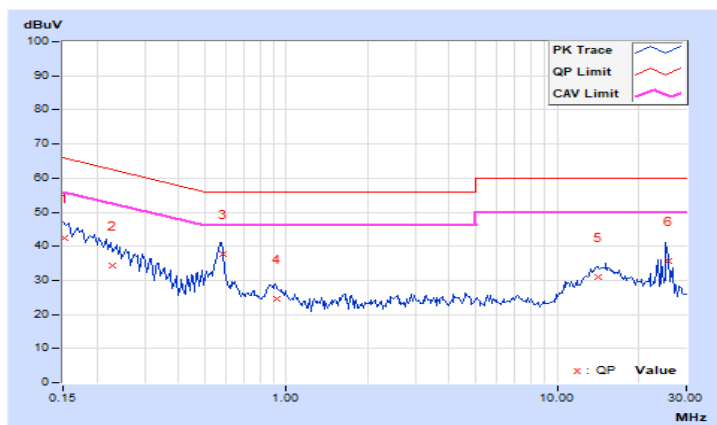

## 7.9 Unwanted Emissions below 1 GHz

### Radiated versus Conducted Measurement

#### For Radiated measurement:

The level of unwanted emissions was measured when radiated by the cabinet or structure of the equipment with the antenna connector(s) terminated by a specified load (cabinet radiation)

#### For Conducted measurement:

The level of unwanted emissions was measured as their power in a specified load (conducted spurious emissions).

### Conducted Emission Convert Formula

- a. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8  
d = measurement distance in 3 meters.
- b. EIRP Level (dBm) = Raw Value(dBm) + Correction Factor(dB)
- c. Correction Factor is directional gain, and the composite gain will be used when signal support the correlated signal  
For the out of band spurious the gain for the specific band may have been used rather than the highest gain across all bands.  
For the band edge the gain for the specific band may have been used.

#### Notes:

1. In restricted bands below 1000 MHz, add upper bound on ground plane reflection:  
For f = 30 – 1000 MHz, add 4.7 dB.
2. The conducted emission test was considered some factor to compute test result.


Mode F

802.11be (EHT20) - Channel 1

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 31.94           | 34.38                   | 40             | -5.62       | -72.3           | -71.83 | 8.17                   | -60.88           |
| 2   | 204.72          | 28.49                   | 43.5           | -15.01      | -76.54          | -80.04 | 8.17                   | -66.77           |
| 3   | 243.27          | 28.4                    | 46             | -17.6       | -76.86          | -79.66 | 8.17                   | -66.86           |
| 4   | 491.84          | 28.5                    | 46             | -17.5       | -77.97          | -77.91 | 8.17                   | -66.76           |
| 5   | 761.38          | 28.85                   | 46             | -17.15      | -80.96          | -75.71 | 8.17                   | -66.41           |
| 6   | 847.34          | 29.54                   | 46             | -16.46      | -79.19          | -75.41 | 8.17                   | -65.72           |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

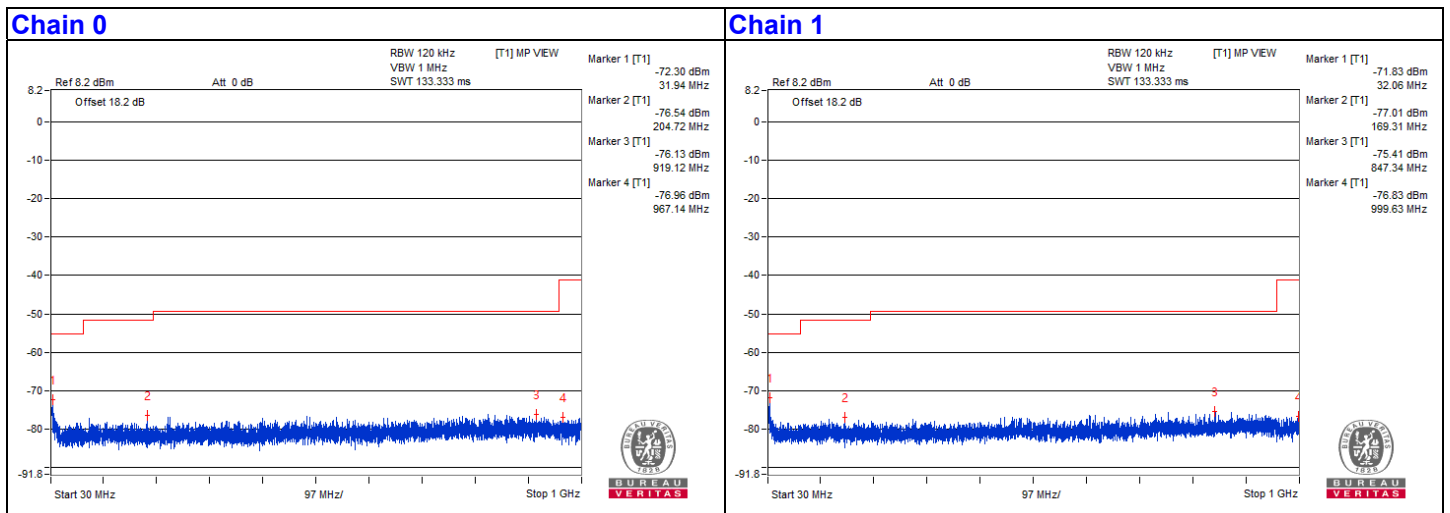


### Mode G

|                             |                  |  |                  |
|-----------------------------|------------------|--|------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) | <b>Channel</b>                           | CH 1 : 5955 MHz  |
| <b>Frequency Range</b>      | 30 MHz ~ 1 GHz   | <b>Detector Function &amp; Bandwidth</b> | (QP) RB = 120kHz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 25°C, 68% RH     |
| <b>Tested By</b>            | Louis Yang       |  |                  |

| Antenna Polarity & Test Distance : Horizontal at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBUV) | Correction Factor (dB/m) |
| 1  | 44.15           | 33.7 QP                 | 40.0           | -6.3        | 2.00 H             | 118                  | 47.4             | -13.7                    |
| 2  | 126.13          | 38.5 QP                 | 43.5           | -5.0        | 1.00 H             | 116                  | 53.5             | -15.0                    |
| 3  | 230.35          | 35.8 QP                 | 46.0           | -10.2       | 2.00 H             | 48                   | 51.9             | -16.1                    |
| 4  | 317.36          | 41.8 QP                 | 46.0           | -4.2        | 1.00 H             | 187                  | 53.9             | -12.1                    |
| 5  | 459.61          | 29.0 QP                 | 46.0           | -17.0       | 1.50 H             | 120                  | 37.6             | -8.6                     |
| 6  | 504.02          | 37.0 QP                 | 46.0           | -9.0        | 1.50 H             | 256                  | 44.8             | -7.8                     |

#### Remarks:

1. Emission Level(dBUV/m) = Raw Value(dBUV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

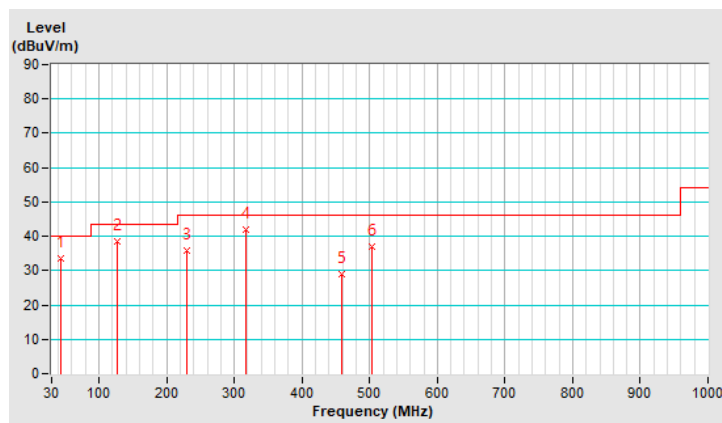


|                             |                  |  |                  |
|-----------------------------|------------------|--|------------------|
| <b>RF Mode</b>              | 802.11be (EHT20) | <b>Channel</b>                           | CH 1 : 5955 MHz  |
| <b>Frequency Range</b>      | 30 MHz ~ 1 GHz   | <b>Detector Function &amp; Bandwidth</b> | (QP) RB = 120kHz |
| <b>Input Power (System)</b> | 120 Vac, 60 Hz   | <b>Environmental Conditions</b>          | 25°C, 68% RH     |
| <b>Tested By</b>            | Louis Yang       |  |                  |

| Antenna Polarity & Test Distance : Vertical at 3 m |                 |                         |                |             |                    |                      |                  |                          |
|--|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No   | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1  | 41.91           | 33.8 QP                 | 40.0           | -6.2        | 1.00 V             | 212                  | 47.8             | -14.0                    |
| <b>2</b>   | <b>114.26</b>   | <b>39.6 QP</b>          | <b>43.5</b>    | <b>-3.9</b> | <b>2.00 V</b>      | <b>243</b>           | <b>55.7</b>      | <b>-16.1</b>             |
| 3  | 215.31          | 38.0 QP                 | 43.5           | -5.5        | 2.00 V             | 91                   | 54.7             | -16.7                    |
| 4  | 301.05          | 38.6 QP                 | 46.0           | -7.4        | 1.00 V             | 135                  | 51.3             | -12.7                    |
| 5  | 422.38          | 30.7 QP                 | 46.0           | -15.3       | 1.00 V             | 185                  | 40.1             | -9.4                     |
| 6  | 512.96          | 38.0 QP                 | 46.0           | -8.0        | 1.50 V             | 214                  | 45.5             | -7.5                     |

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

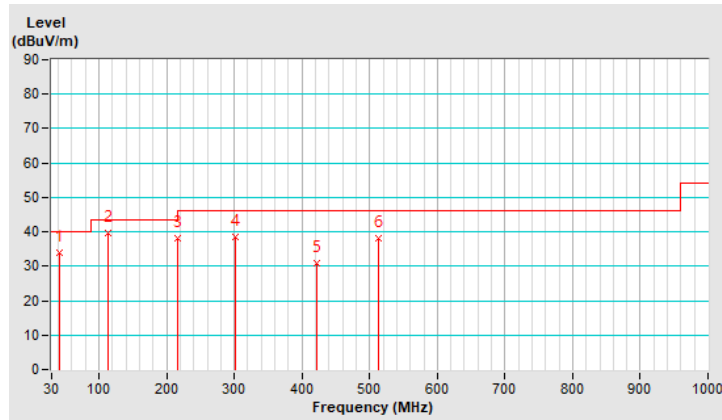

## 7.10 Unwanted Emissions above 1 GHz

### Radiated versus Conducted Measurement

#### For Radiated measurement:

The level of unwanted emissions was measured when radiated by the cabinet or structure of the equipment with the antenna connector(s) terminated by a specified load (cabinet radiation)

#### For Conducted measurement:

The level of unwanted emissions was measured as their power in a specified load (conducted spurious emissions).

### Conducted Emission Convert Formula

a.  $\text{Emission Level (dBuV/m)} = \text{EIRP Level (dBm)} - 20\log(d) + 104.8$

d = measurement distance in 3 meters.

b.  $\text{EIRP Level (dBm)} = \text{Raw Value (dBm)} + \text{Correction Factor (dB)}$

c. Correction Factor is directional gain, and the composite gain will be used when signal support the correlated signal

For the out of band spurious the gain for the specific band may have been used rather than the highest gain across all bands.

For the band edge the gain for the specific band may have been used.

Notes: The conducted emission test was considered some factor to compute test result.

**Mode A**
**802.11a - Channel 2**
**Conducted spurious emission table**

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 11868.75        | 58.22 PK                | 74             | -15.78      | -48.65          | -47.83 | 8.17                   | -37.04           |
| 2   | 11873.43        | 48.74 AV                | 54             | -5.26       | -57.47          | -57.95 | 8.17                   | -46.52           |
| 3   | 17808.18        | 49.62 PK                | 74             | -24.38      | -57.78          | -56.03 | 8.17                   | -45.64           |
| 4   | 17795.25        | 39.56 AV                | 54             | -14.44      | -66.96          | -66.81 | 8.17                   | -55.70           |







## Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.



BUREAU VERITAS







### Chain 0

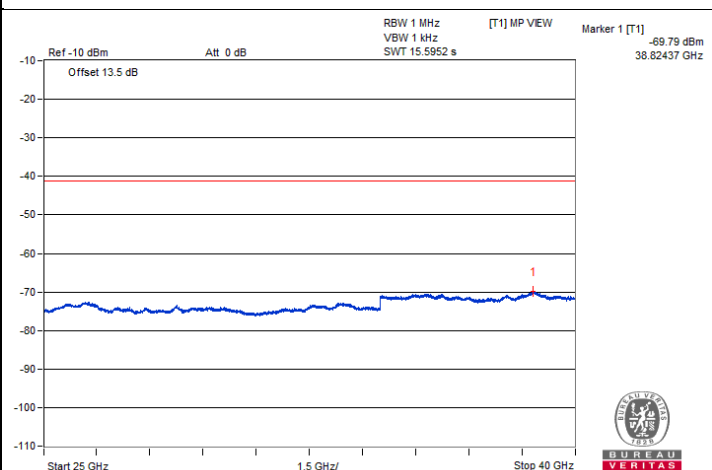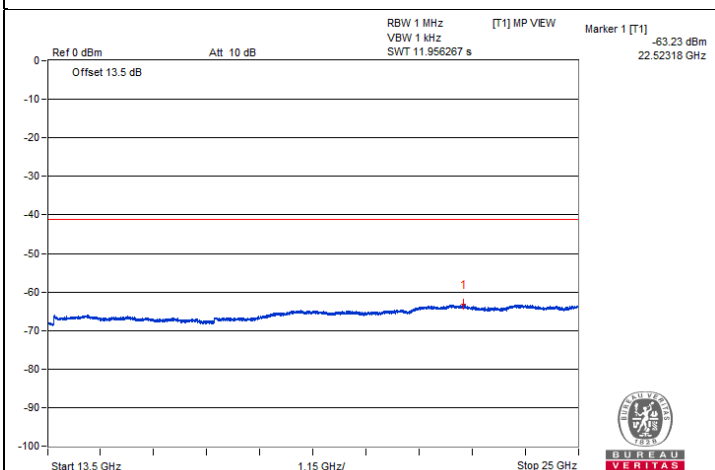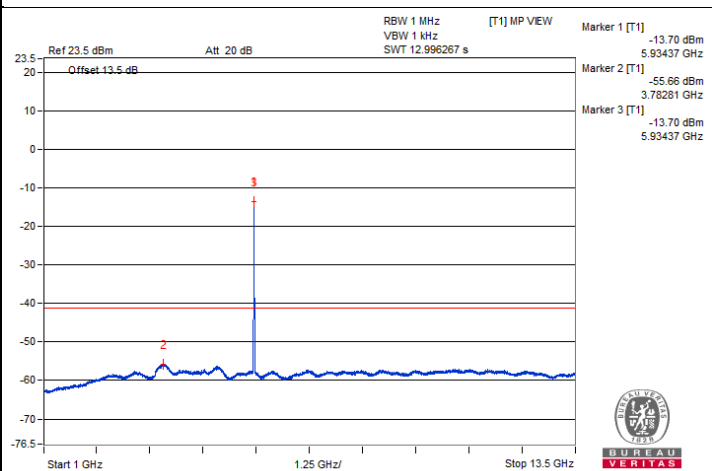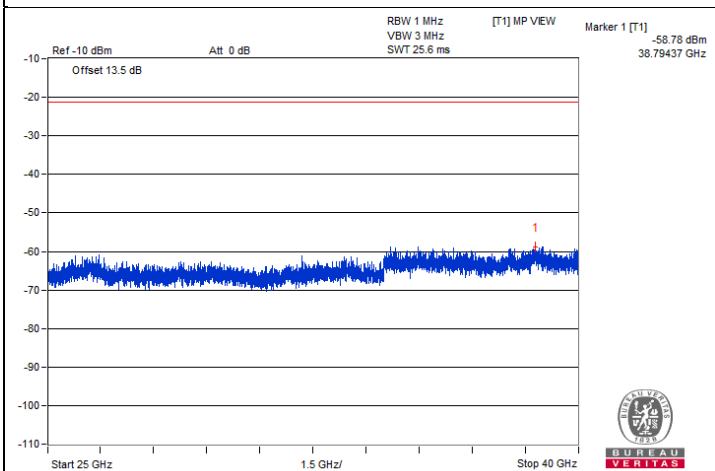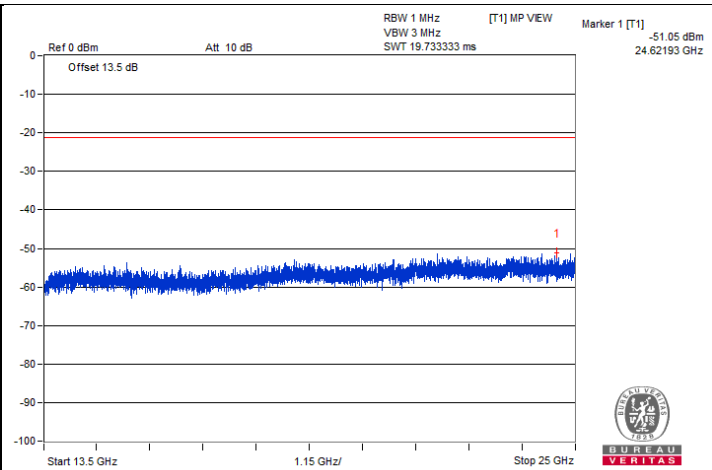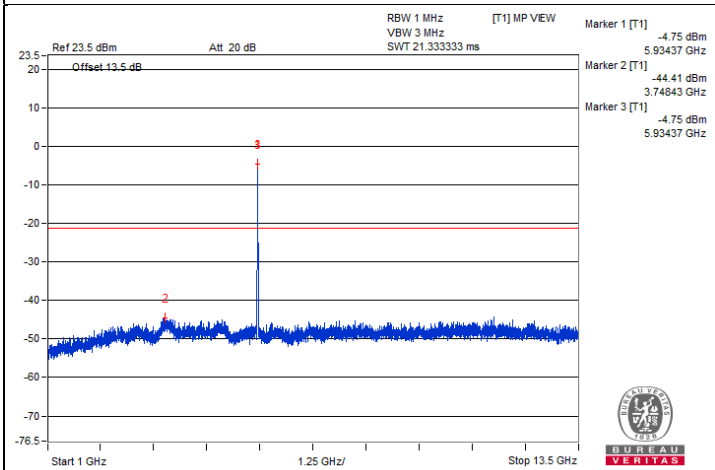





### Chain 1

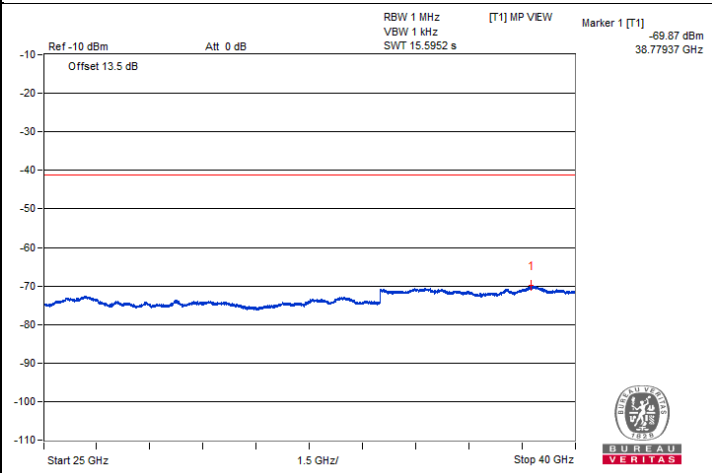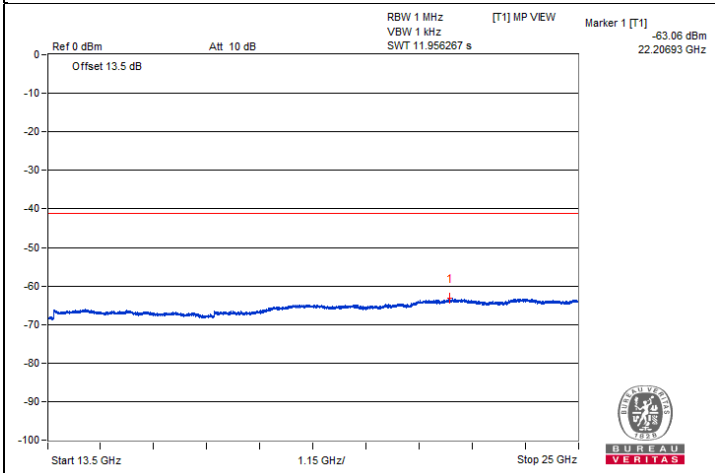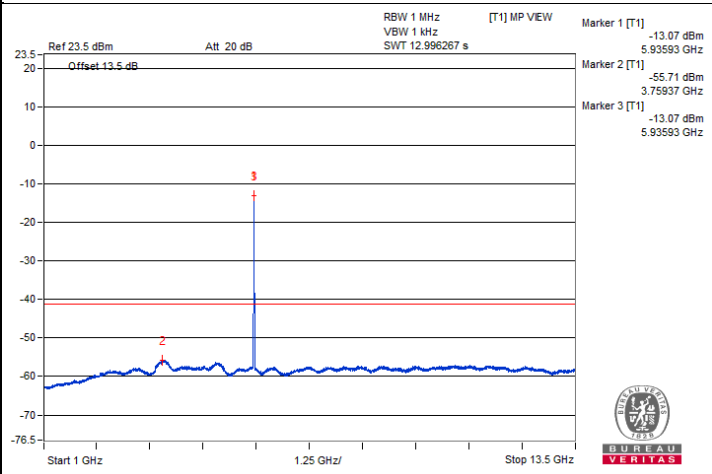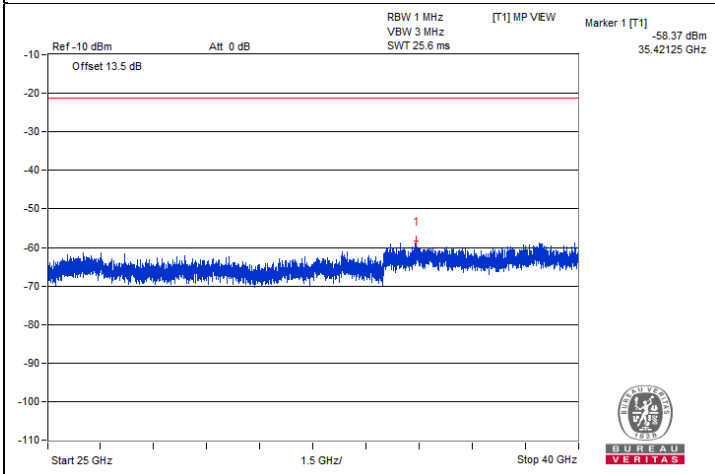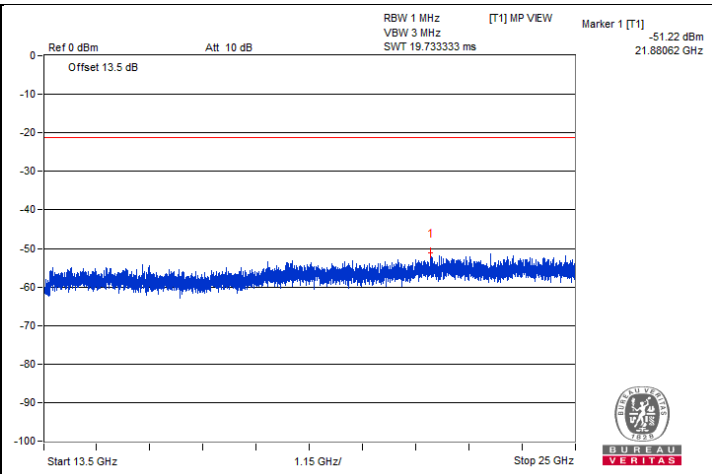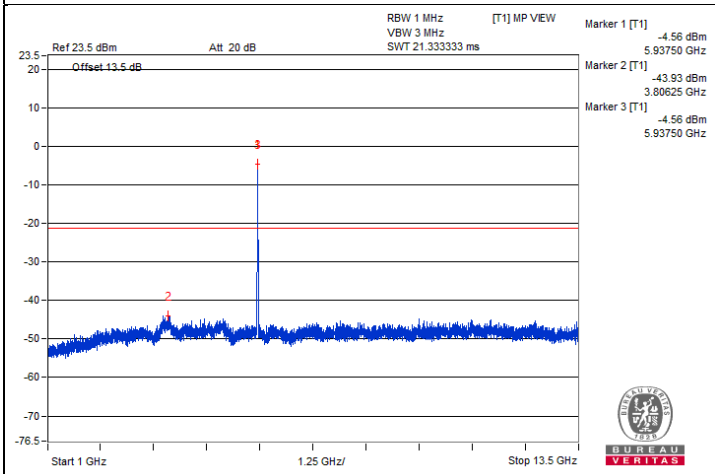




### Bandedge table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #5924.7         | 84.66 PK                | 88.2           | -3.54       | -20.7           | -23.17 | 8.15                   | -10.60           |
| 2   | #5925           | 67.87 AV                | 68.2           | -0.33       | -38.84          | -38.27 | 8.15                   | -27.39           |


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

### Chain 0

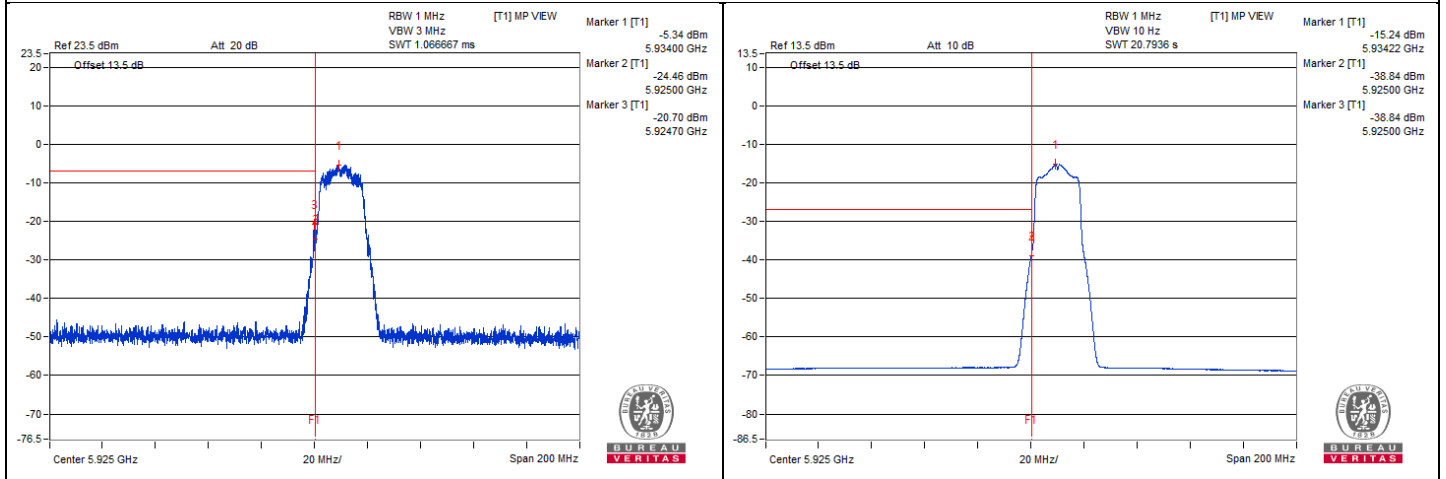

### Chain 1

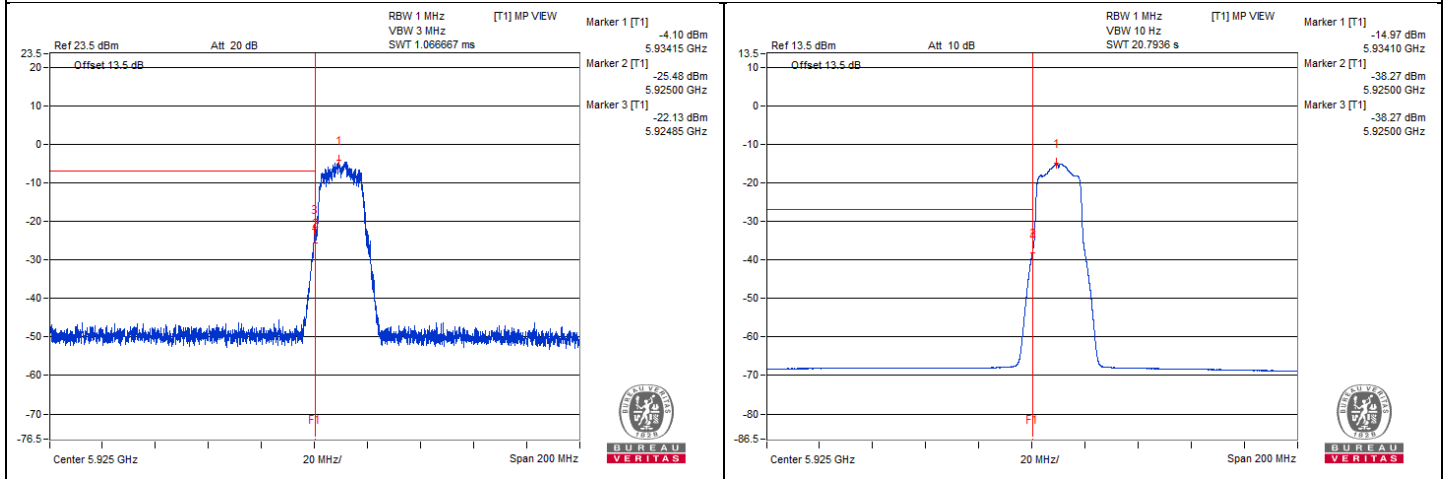

**802.11a - Channel 1**
**Conducted spurious emission table**


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 11912.5         | 58.96 PK                | 74             | -15.04      | -46.93          | -48.1  | 8.17                   | -36.30           |
| 2   | 11918.75        | 48.59 AV                | 54             | -5.41       | -57.99          | -57.71 | 8.17                   | -46.67           |
| 3   | 17872.87        | 48.58 PK                | 74             | -25.42      | -58.86          | -57.05 | 8.17                   | -46.68           |
| 4   | 17864.25        | 39.51 AV                | 54             | -14.49      | -66.7           | -67.17 | 8.17                   | -55.75           |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.




### Chain 0

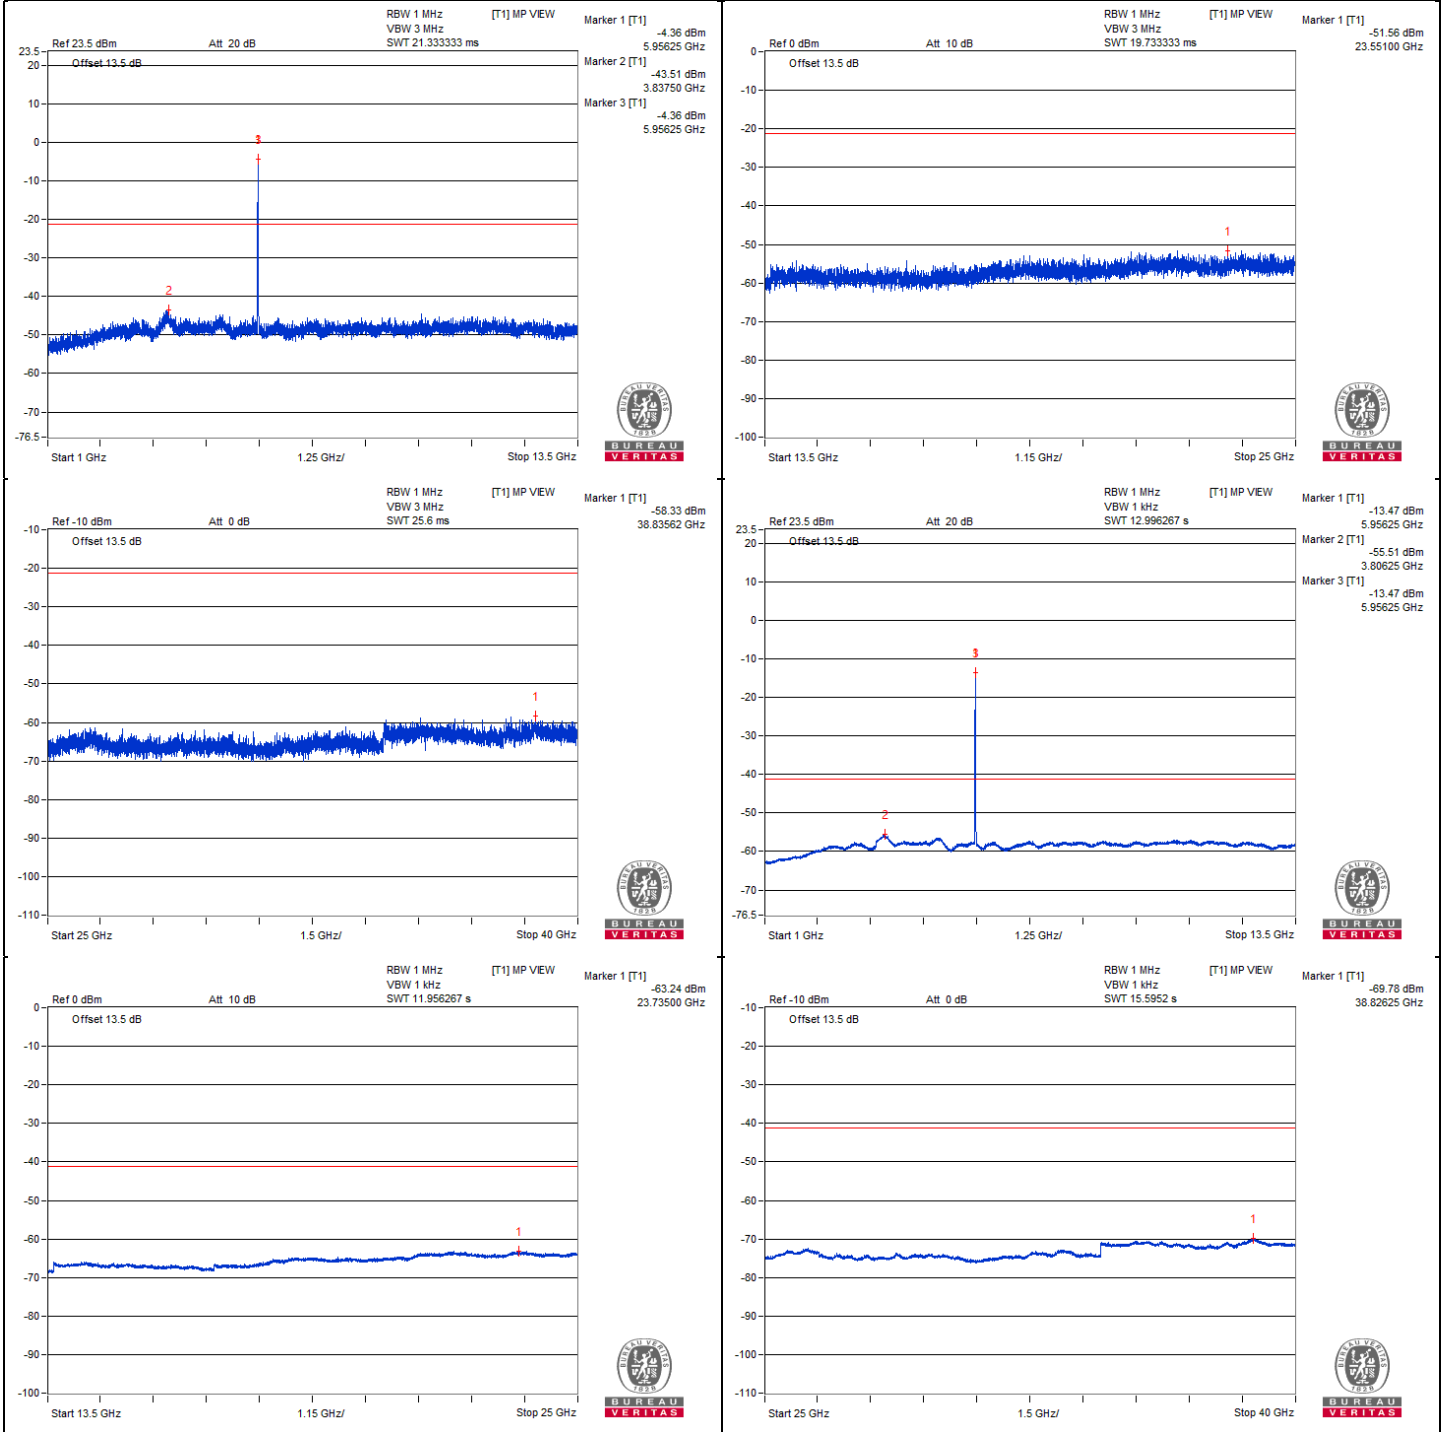



BUREAU  
VERITAS

### Chain 1

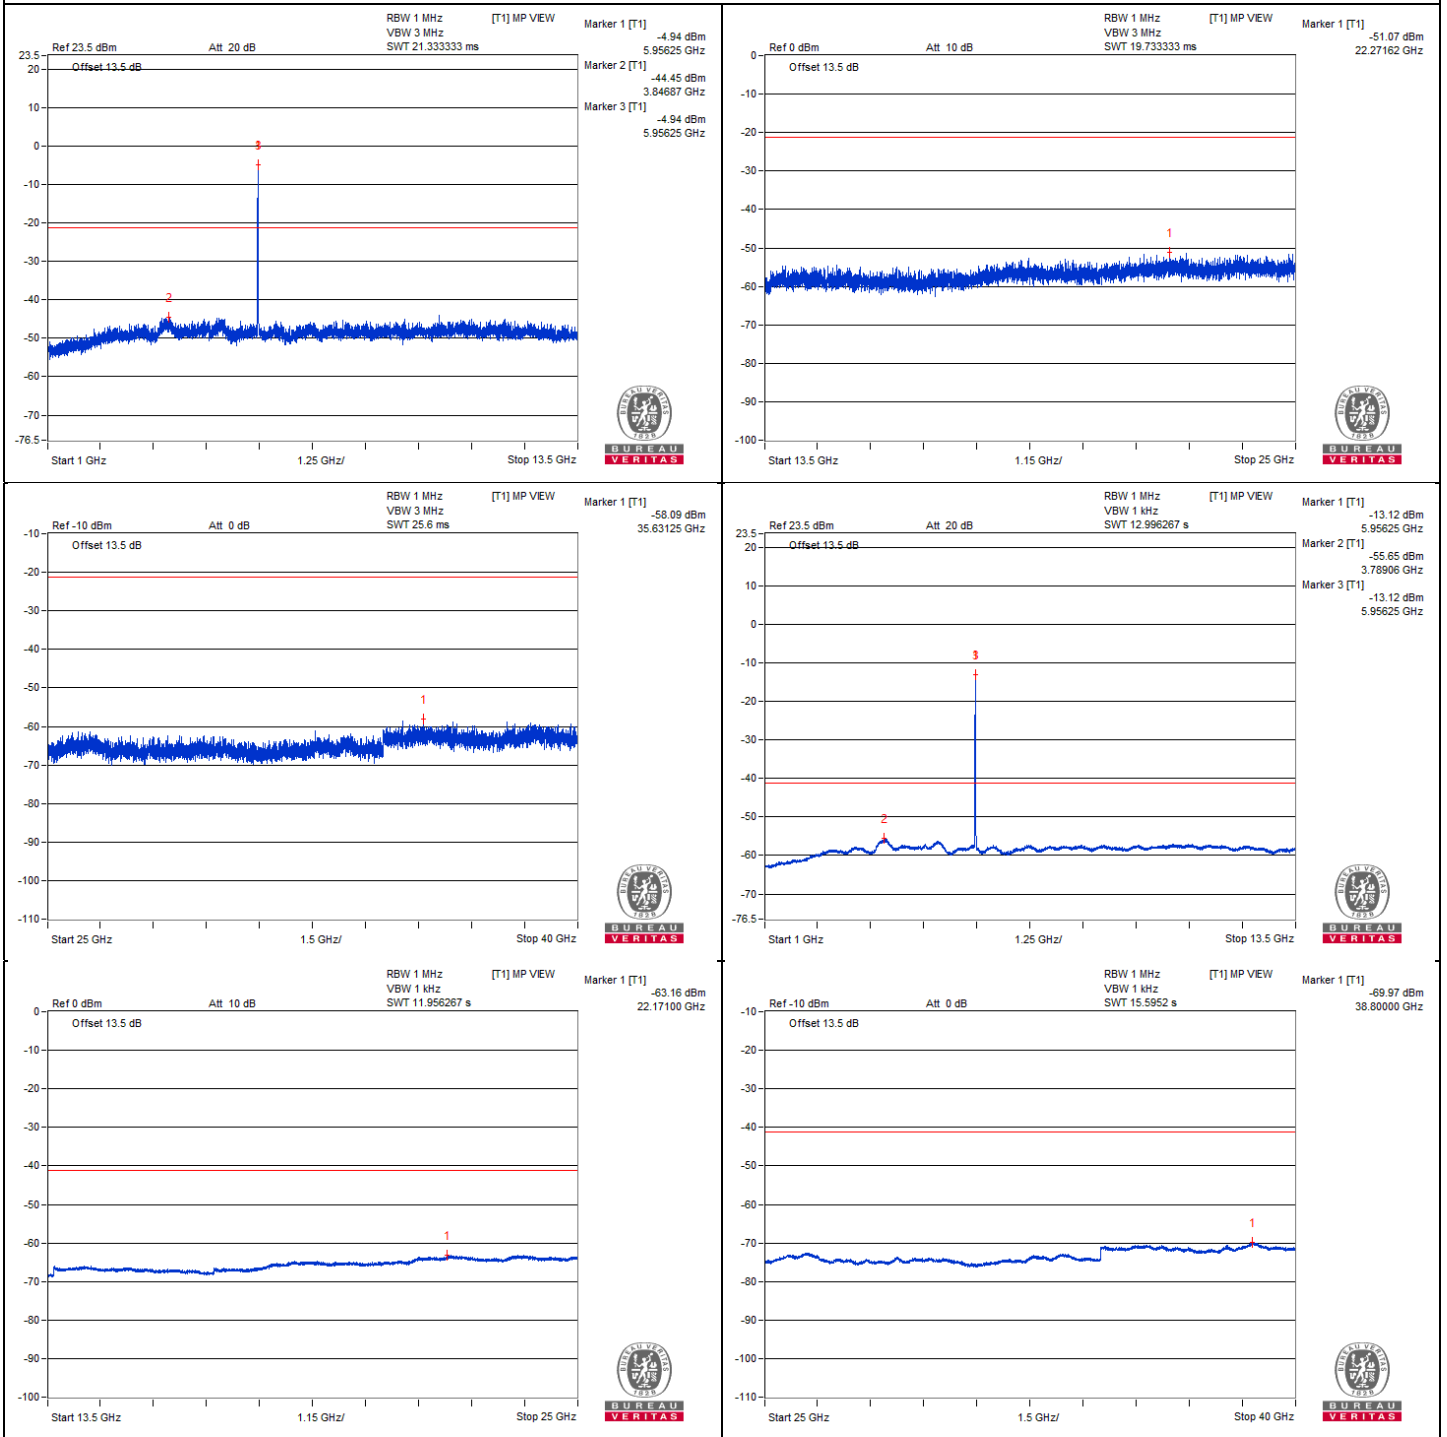


**Bandedge table**

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #5881.3         | 59.84 PK                | 88.2           | -28.36      | -48.02          | -45.5  | 8.15                   | -35.42           |
| 2   | #5924.25        | 38.63 AV                | 68.2           | -29.57      | -67.76          | -67.83 | 8.15                   | -56.63           |


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. "#": The frequency is out of the restricted band.

**Chain 0**

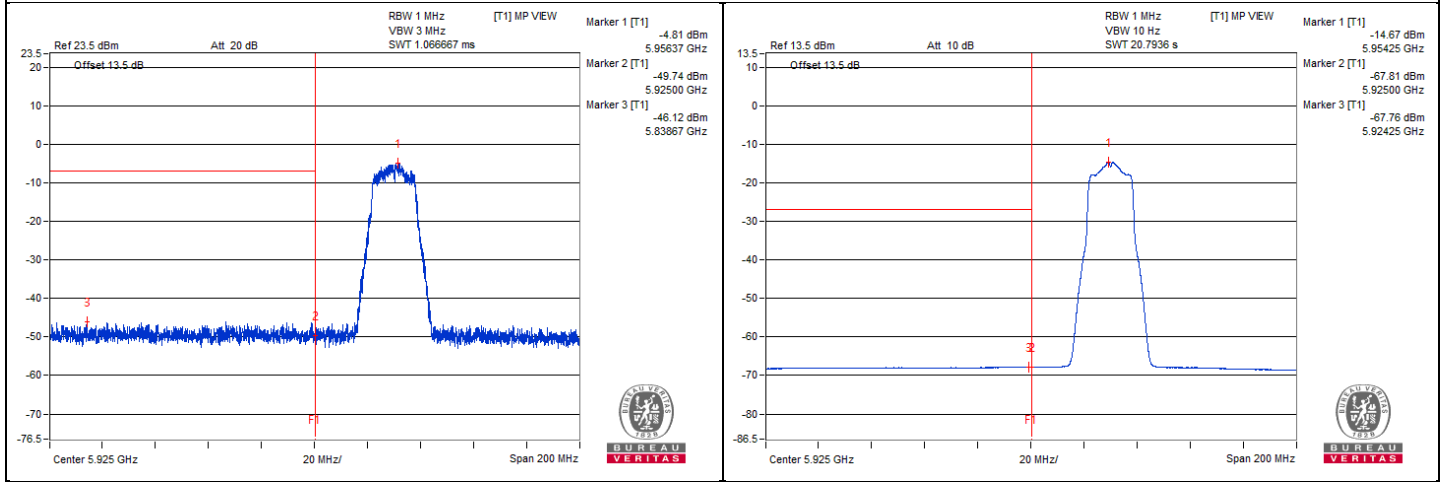

**Chain 1**

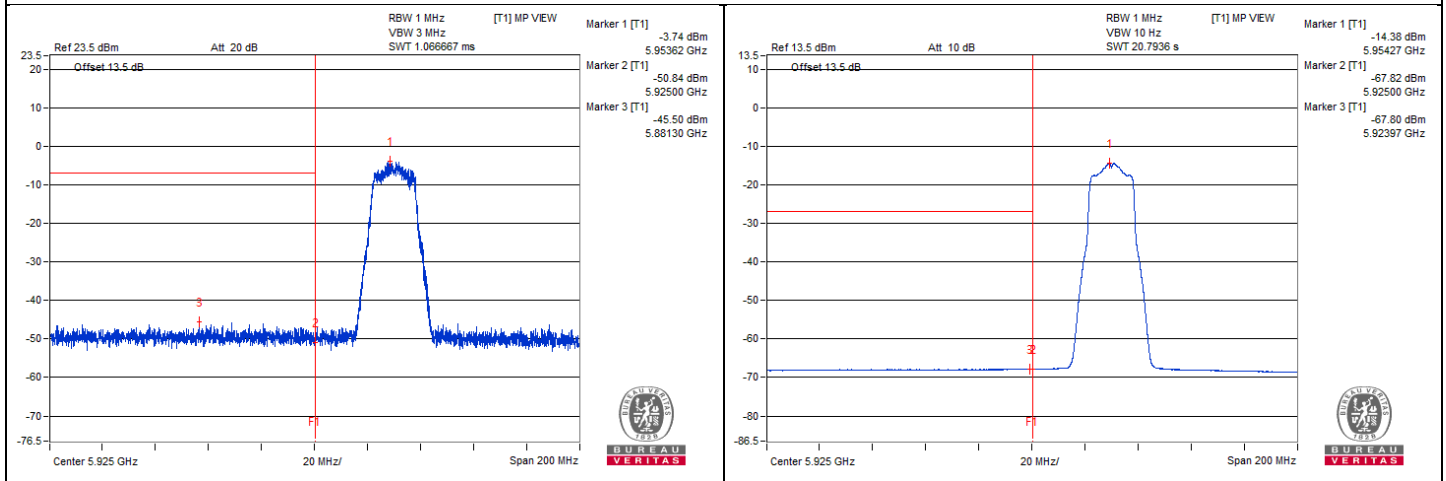

### 802.11a - Channel 45

#### Conducted spurious emission table


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 12350           | 58.67 PK                | 74             | -15.33      | -47.42          | -48.15 | 8.17                   | -36.59           |
| 2   | 12354.68        | 48.78 AV                | 54             | -5.22       | -57.73          | -57.59 | 8.17                   | -46.48           |
| 3   | 18518.31        | 51.06 PK                | 74             | -22.94      | -54.86          | -55.98 | 8.17                   | -44.20           |
| 4   | 18521.18        | 40.83 AV                | 54             | -13.17      | -65.34          | -65.89 | 8.17                   | -54.43           |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.




### Chain 0

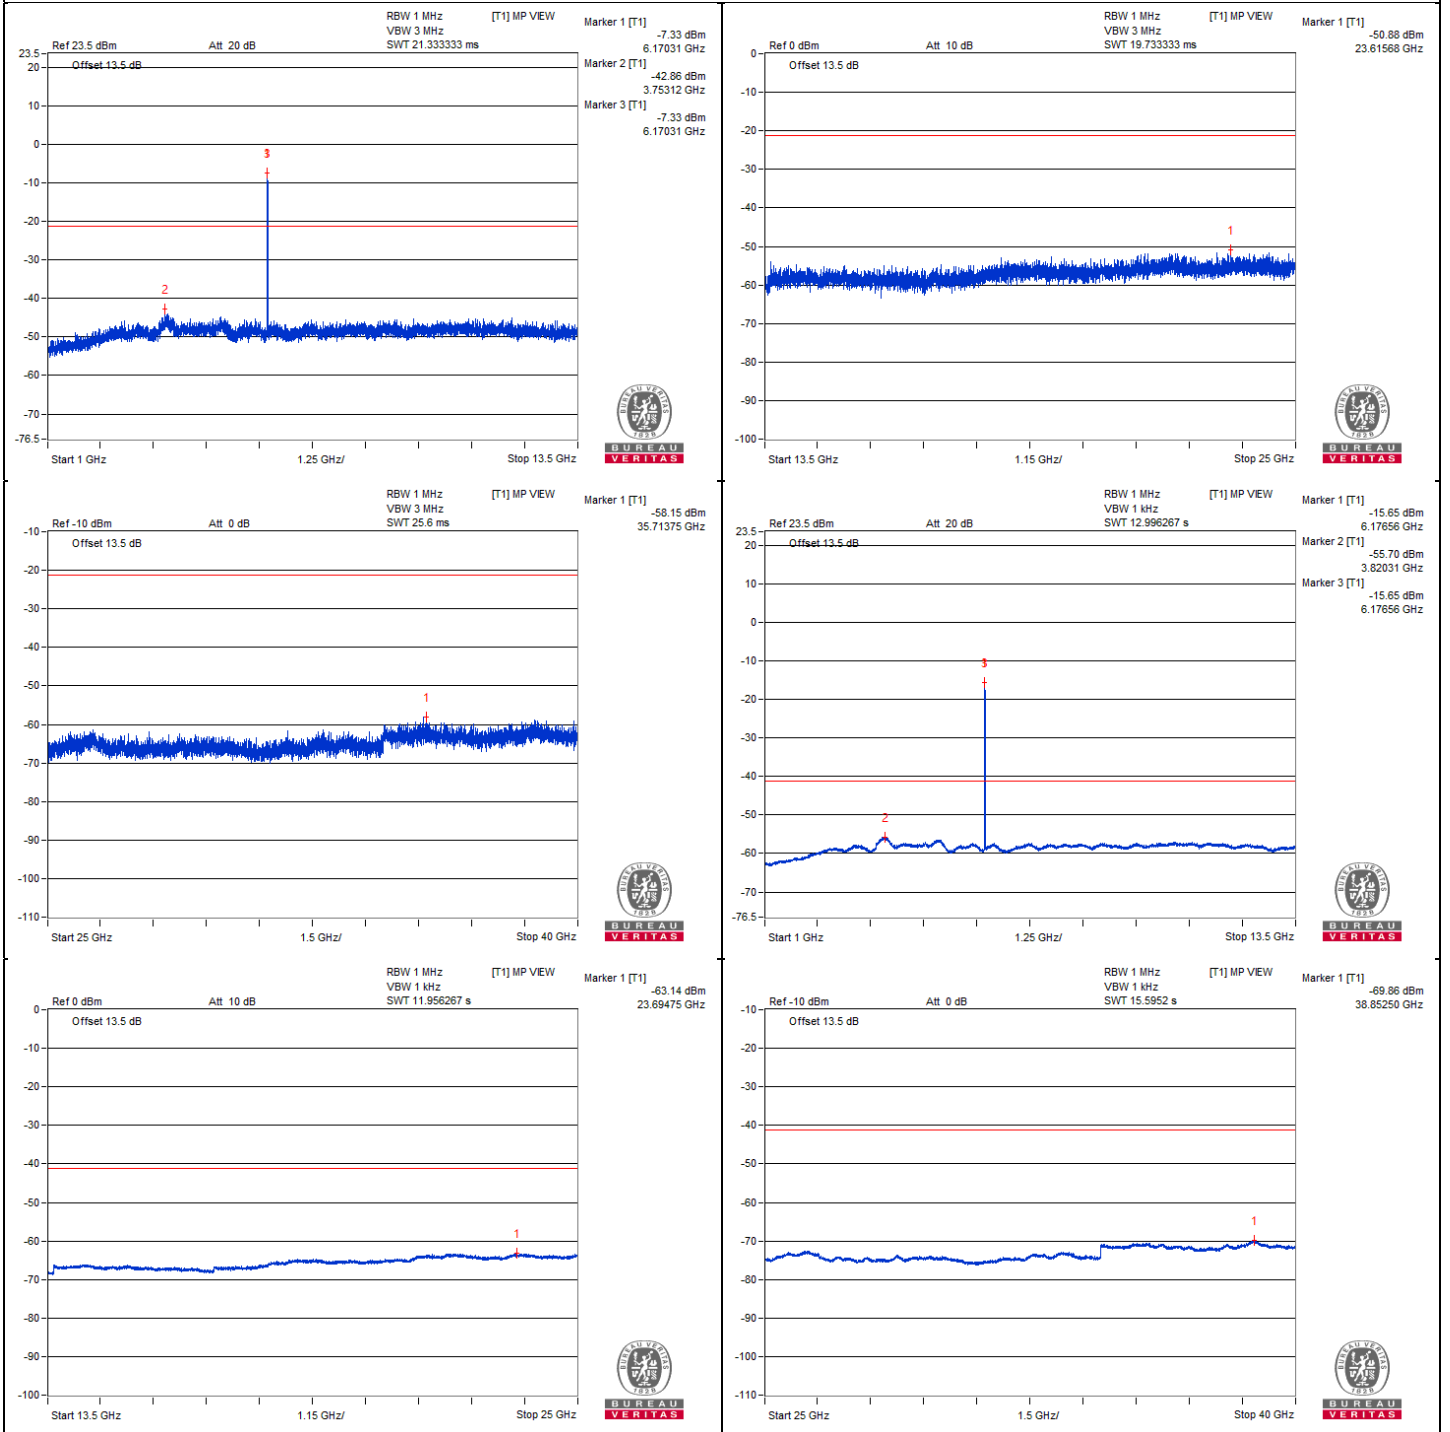





### Chain 1

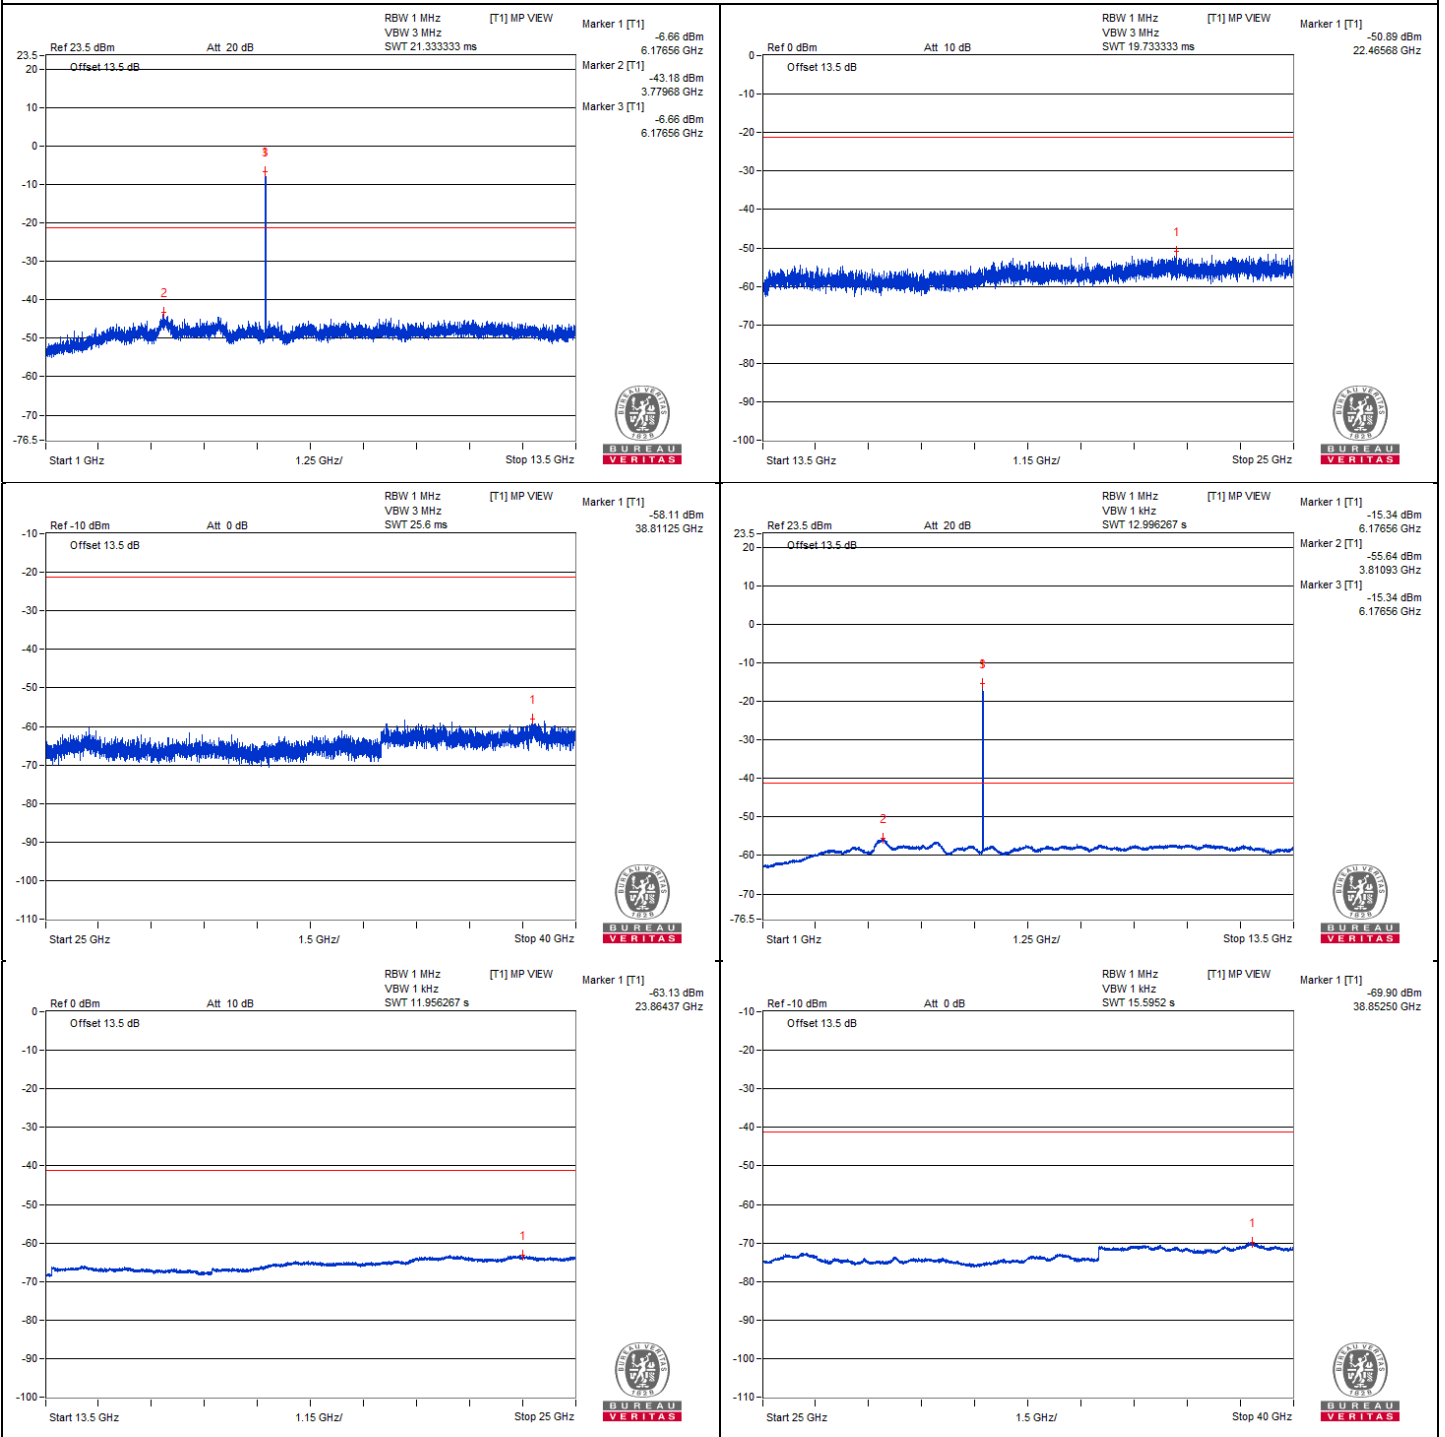

### 802.11a - Channel 93

#### Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #12834.37       | 58.67 PK                | 88.2           | -29.53      | -48.12          | -47.44 | 8.17                   | -36.59           |
| 2   | #12828.12       | 47.96 AV                | 68.2           | -20.24      | -58.47          | -58.5  | 8.17                   | -47.30           |
| 3   | 19239.93        | 51.82 PK                | 74             | -22.18      | -55.04          | -54.23 | 8.17                   | -43.44           |
| 4   | 19239.93        | 41.24 AV                | 54             | -12.76      | -65.46          | -64.95 | 8.17                   | -54.02           |


#### Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




BUREAU  
VERITAS

### Chain 0

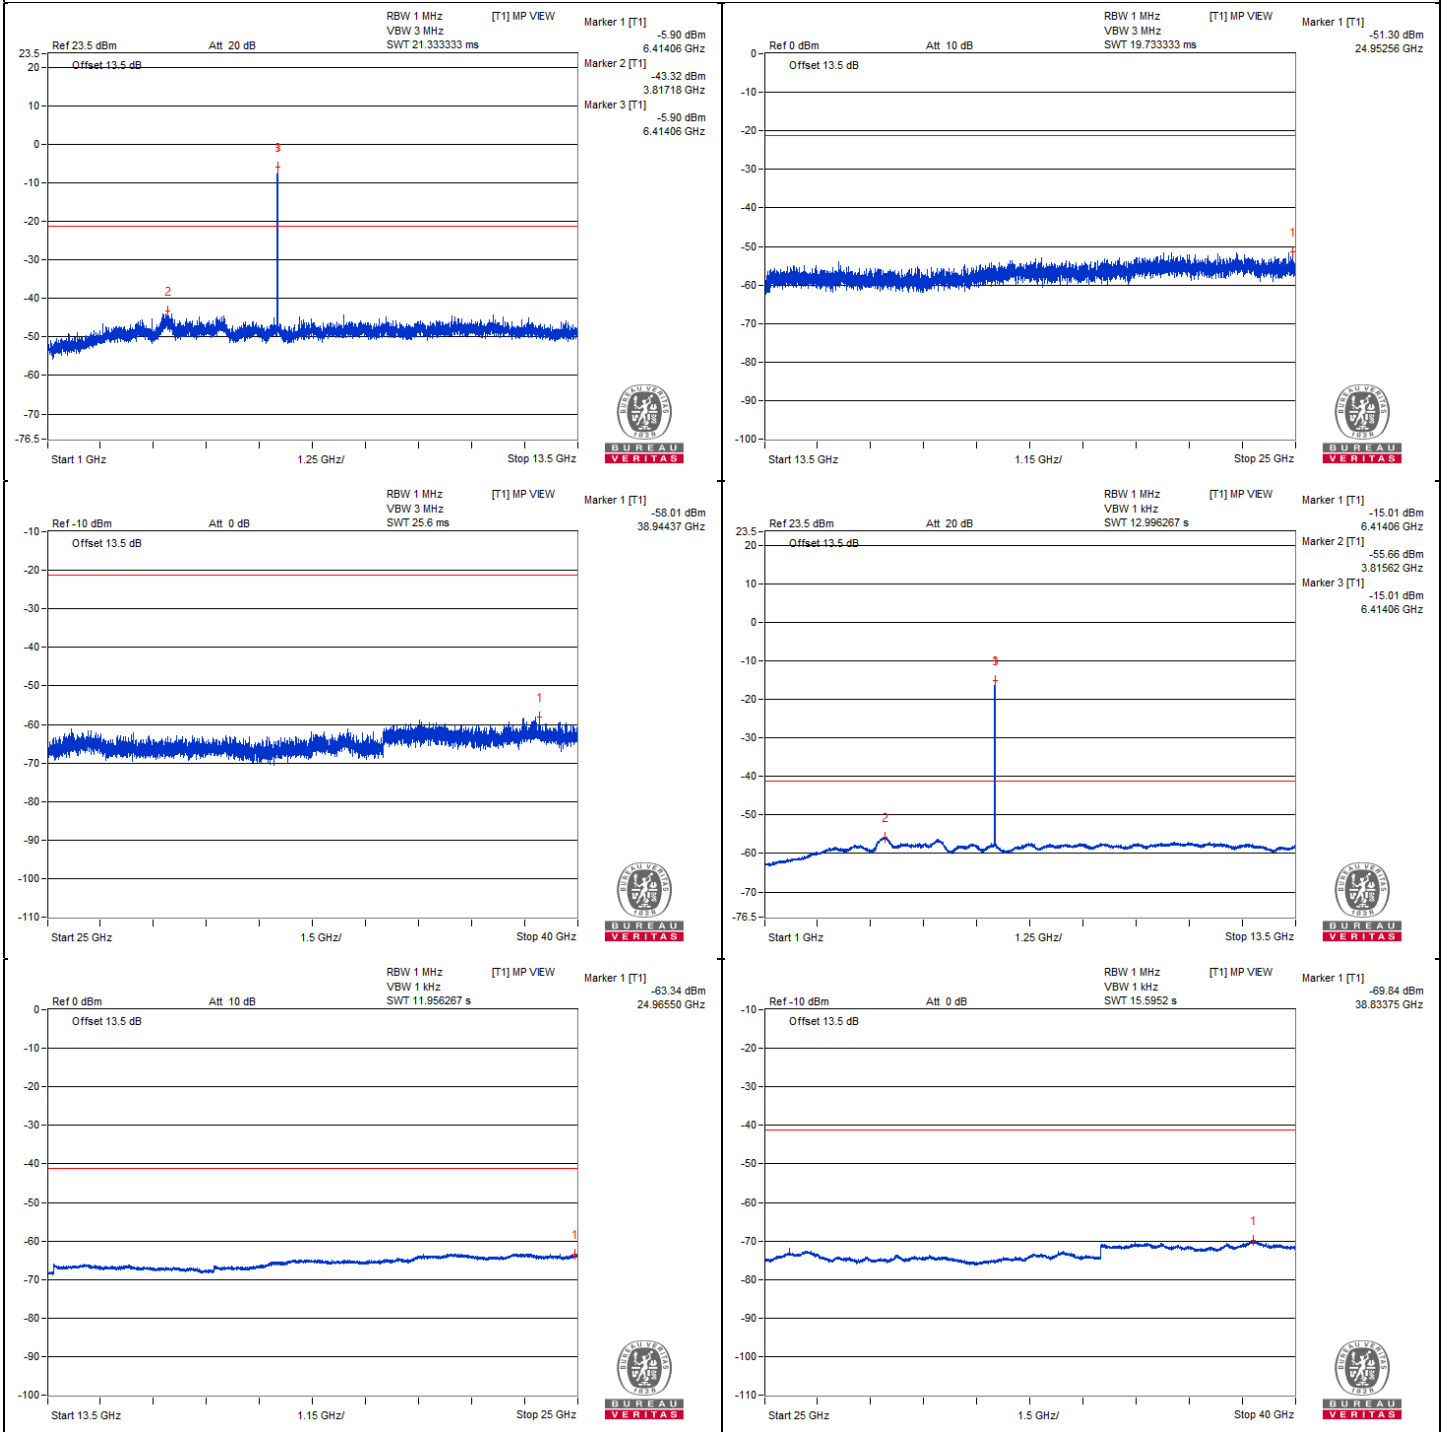



### Chain 1

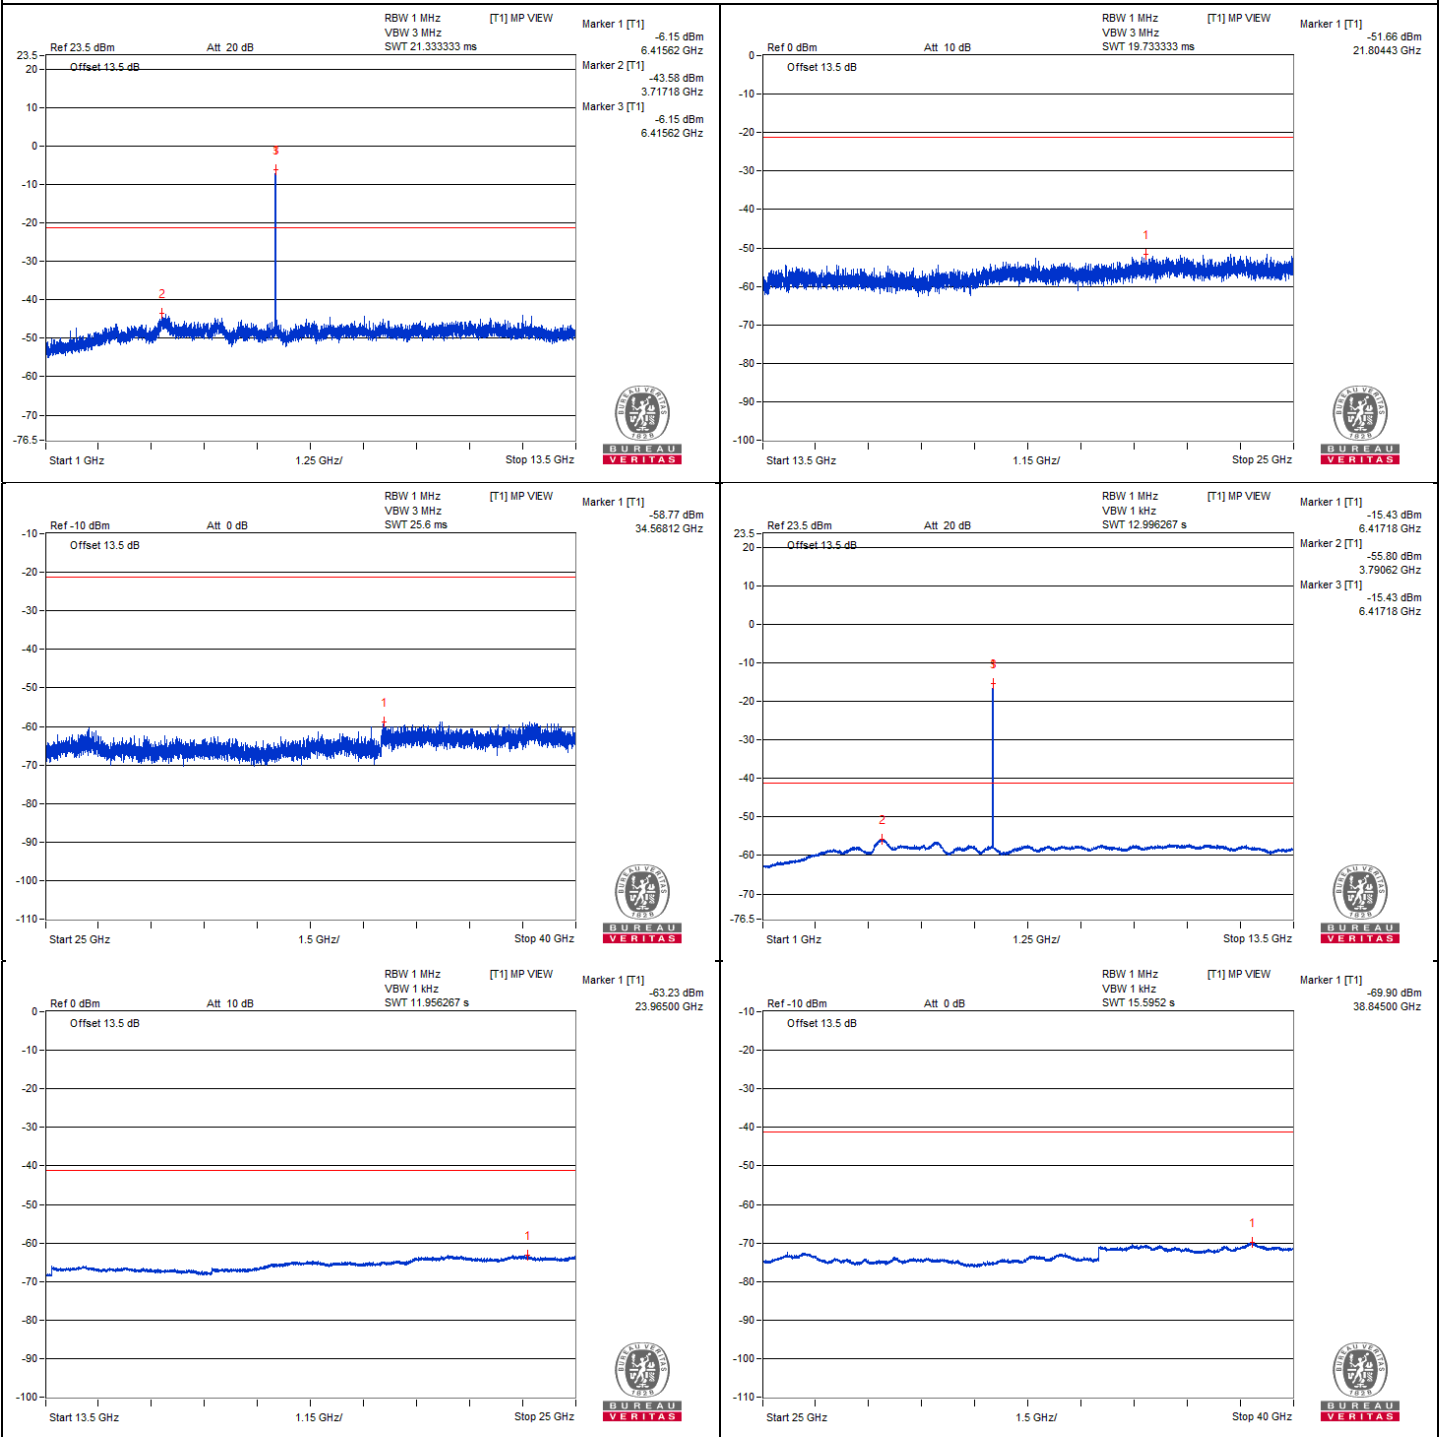

**802.11a - Channel 97**
**Conducted spurious emission table**


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #12865.62       | 58.86 PK                | 88.2           | -29.34      | -47.14          | -48.07 | 8.17                   | -36.40           |
| 2   | #12870.31       | 47.67 AV                | 68.2           | -20.53      | -58.78          | -58.77 | 8.17                   | -47.59           |
| 3   | 19306.06        | 51.09 PK                | 74             | -22.91      | -54.36          | -56.63 | 8.17                   | -44.17           |
| 4   | 19310.37        | 41.38 AV                | 54             | -12.62      | -65.22          | -64.91 | 8.17                   | -53.88           |

**Remarks:**

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




### Chain 0

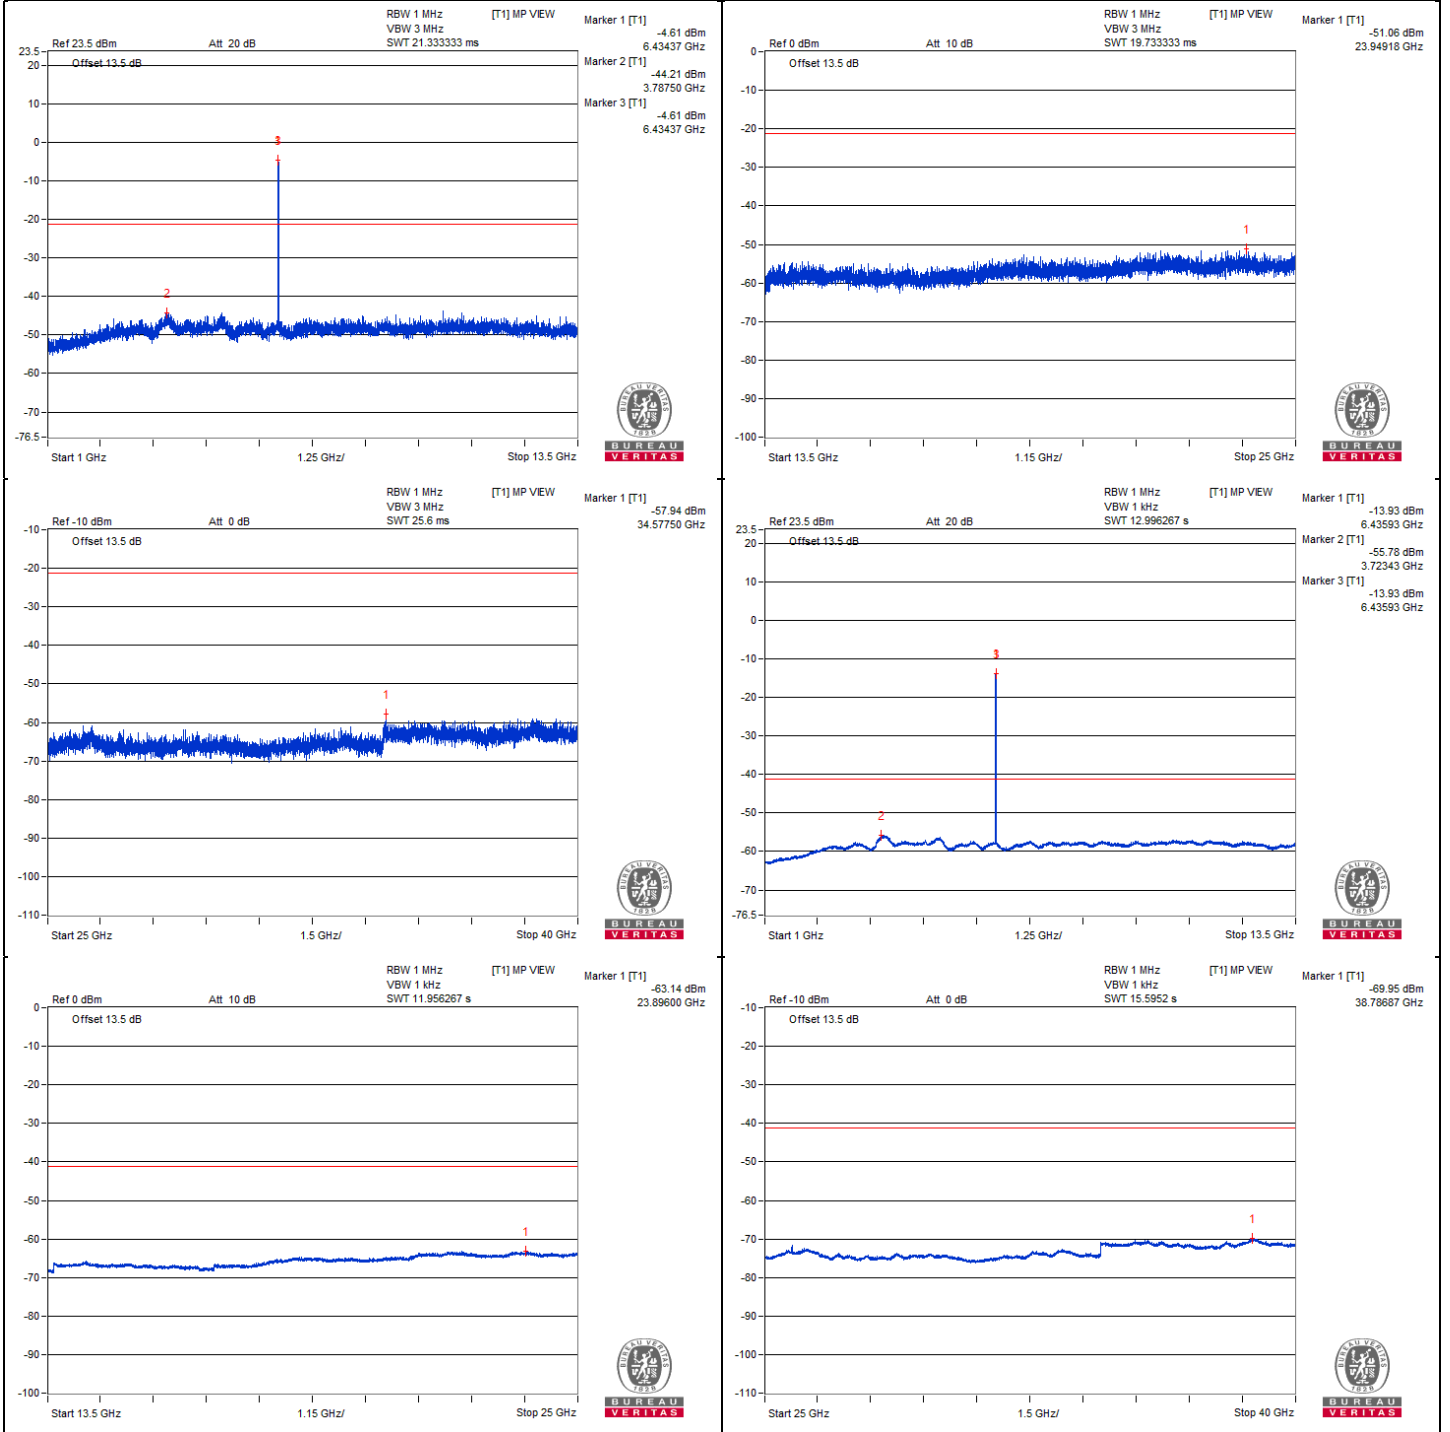



### Chain 1

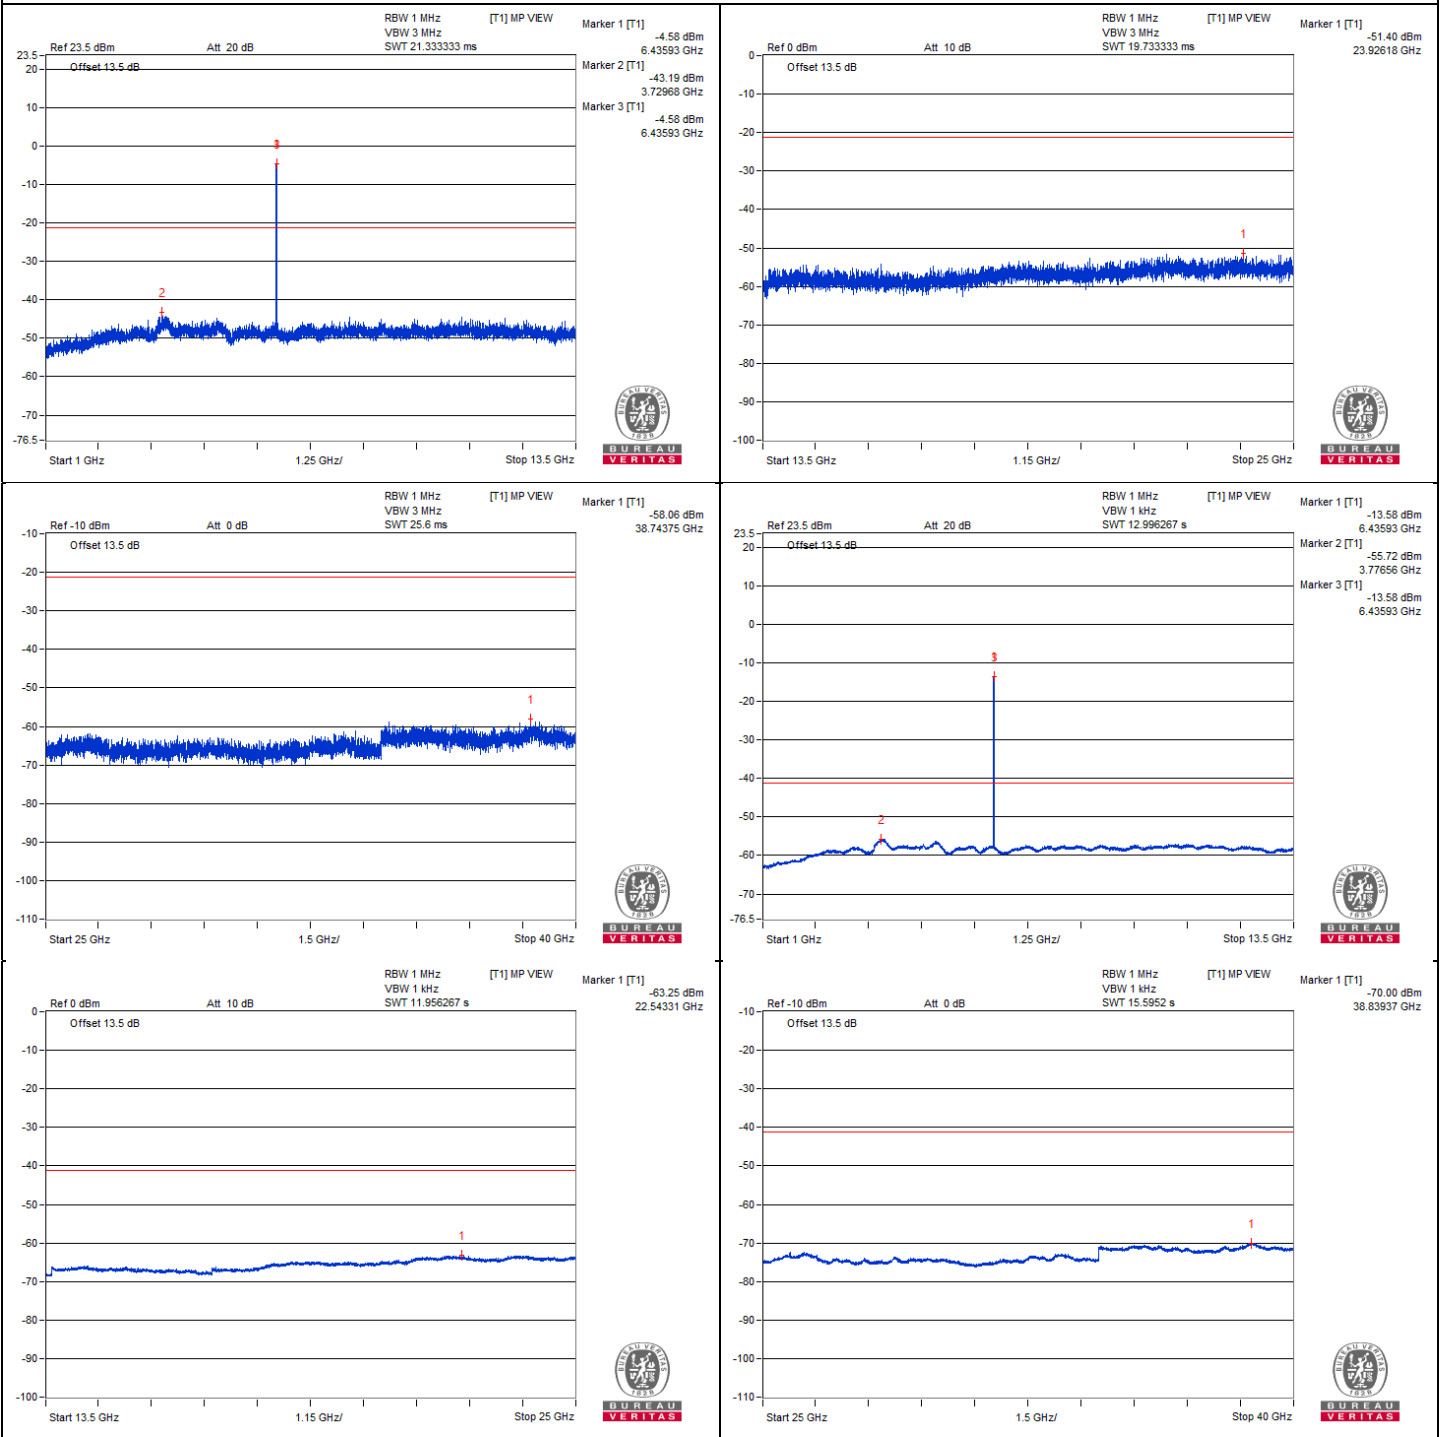

### 802.11a - Channel 105

#### Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #12940.62       | 58.13 PK                | 88.2           | -30.07      | -48.79          | -47.88 | 8.17                   | -37.13           |
| 2   | #12948.43       | 47.45 AV                | 68.2           | -20.75      | -59.08          | -58.9  | 8.17                   | -47.81           |
| 3   | 19434           | 50.32 PK                | 74             | -23.68      | -55.89          | -56.36 | 8.17                   | -44.94           |
| 4   | 19431.12        | 41.3 AV                 | 54             | -12.7       | -65.18          | -65.1  | 8.17                   | -53.96           |


#### Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.






### Chain 0

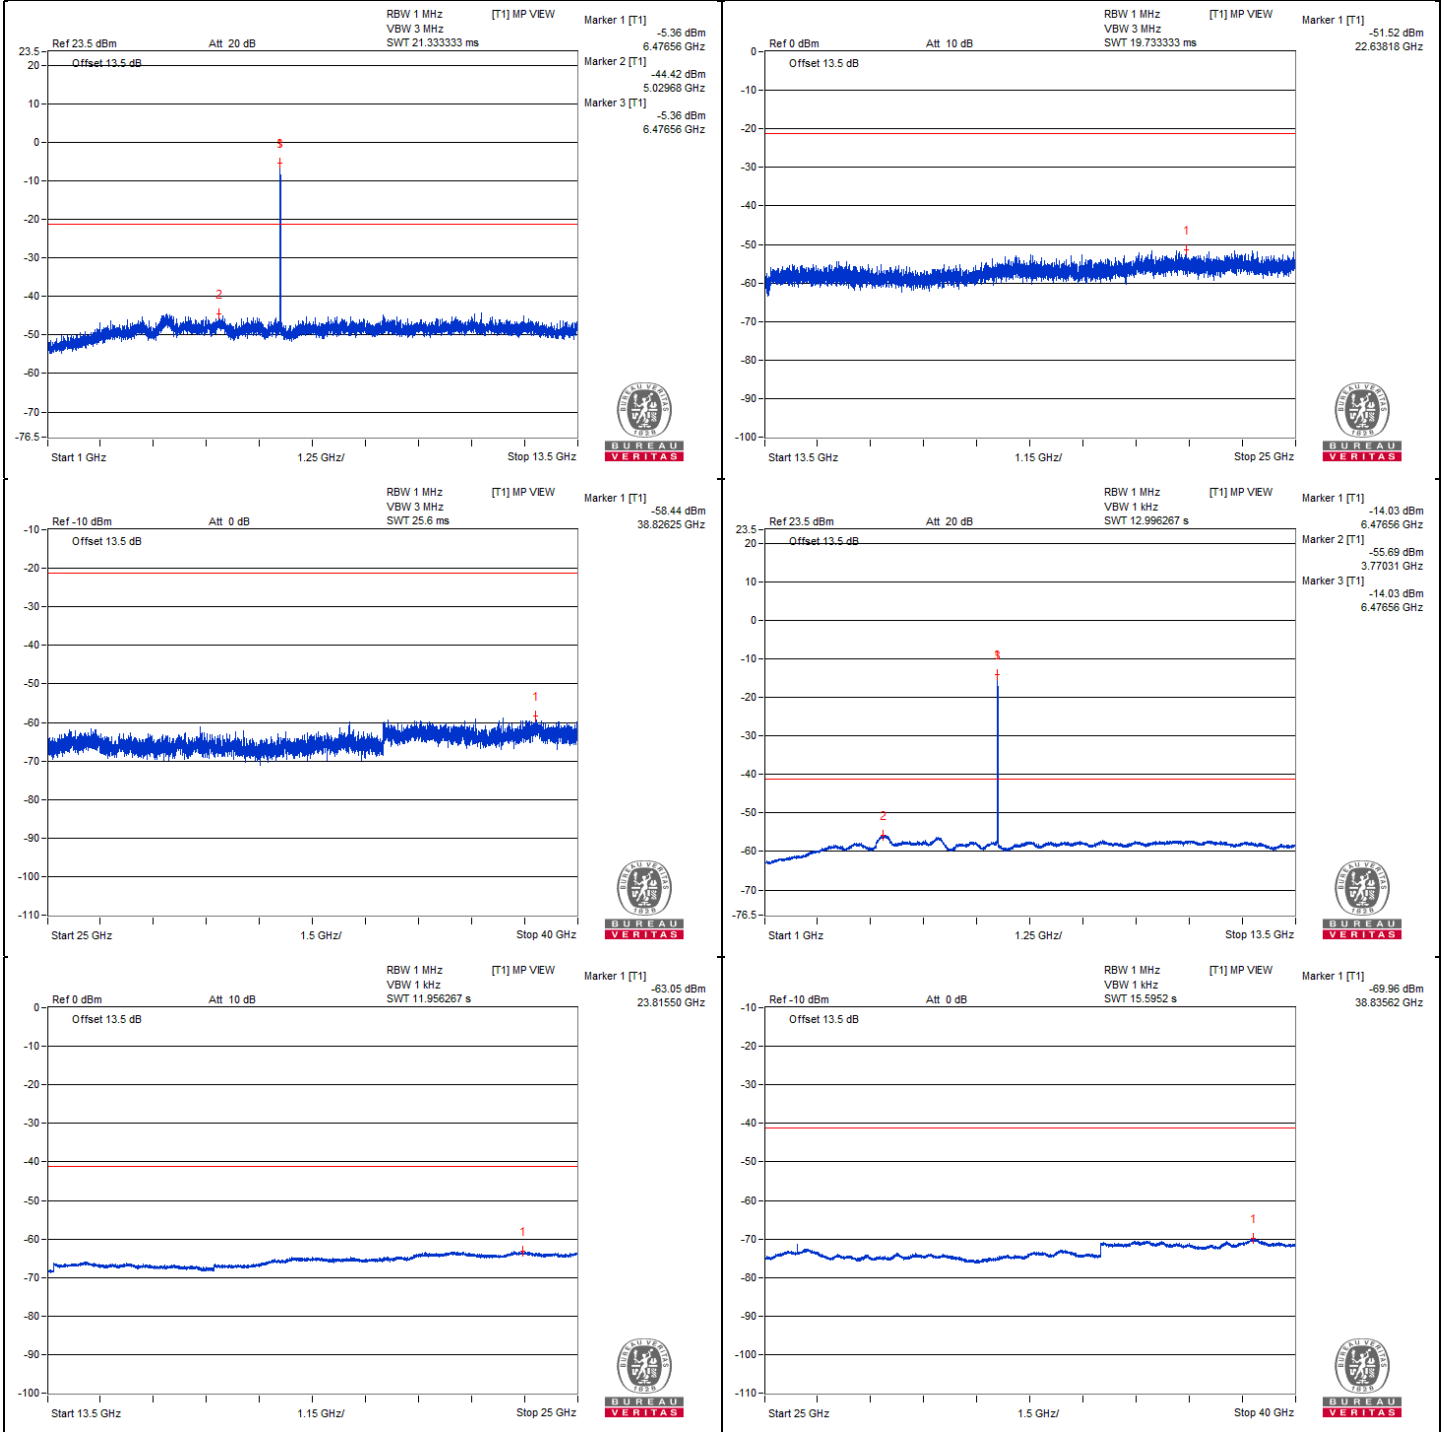



### Chain 1

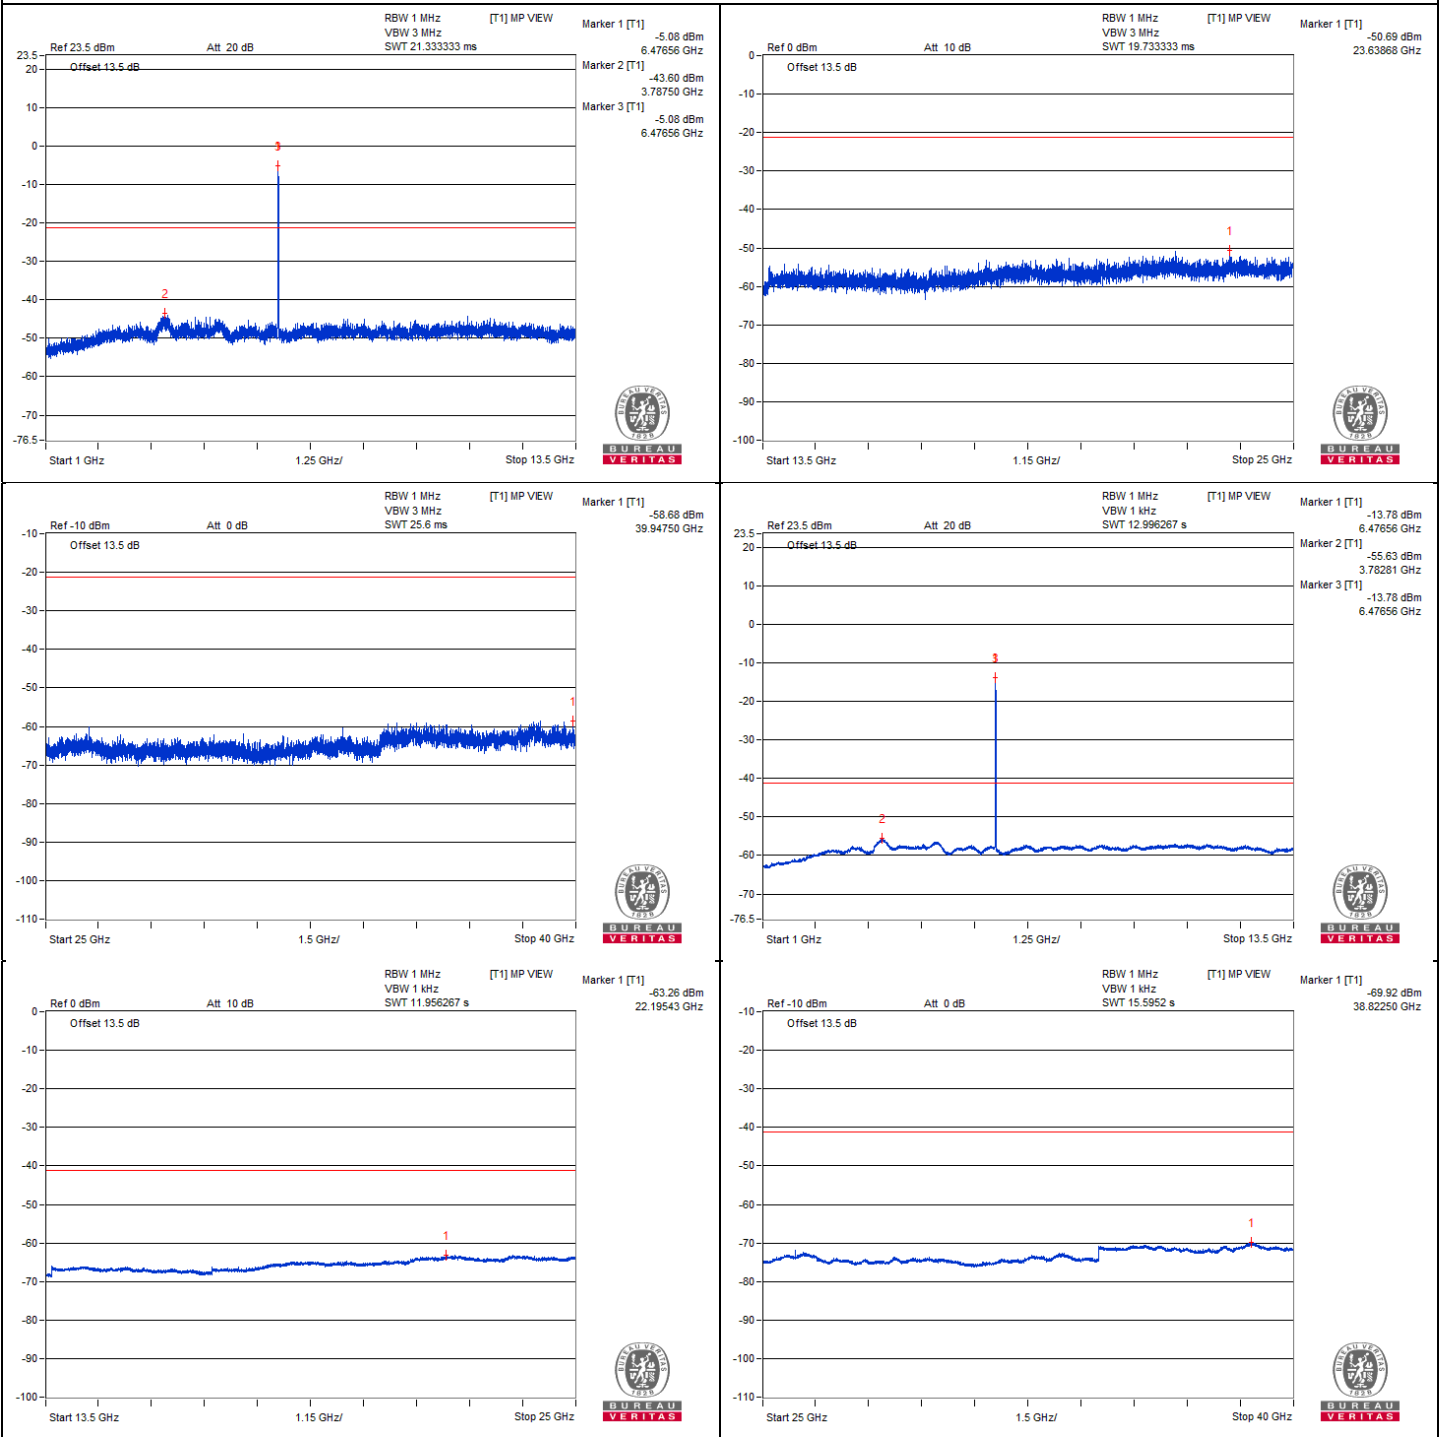

**802.11a - Channel 113**
**Conducted spurious emission table**







| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #13020.31       | 58.76 PK                | 88.2           | -29.44      | -47.25          | -48.16 | 8.17                   | -36.50           |
| 2   | #13031.25       | 47.49 AV                | 68.2           | -20.71      | -58.91          | -59    | 8.17                   | -47.77           |
| 3   | 19544.68        | 50.84 PK                | 74             | -23.16      | -53.79          | -58.75 | 8.17                   | -44.42           |
| 4   | 19537.5         | 41.01 AV                | 54             | -12.99      | -65.31          | -65.56 | 8.17                   | -54.25           |

**Remarks:**

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




### Chain 0

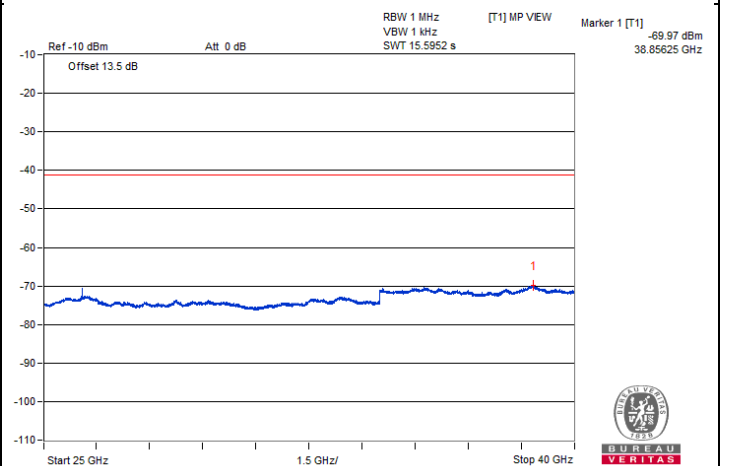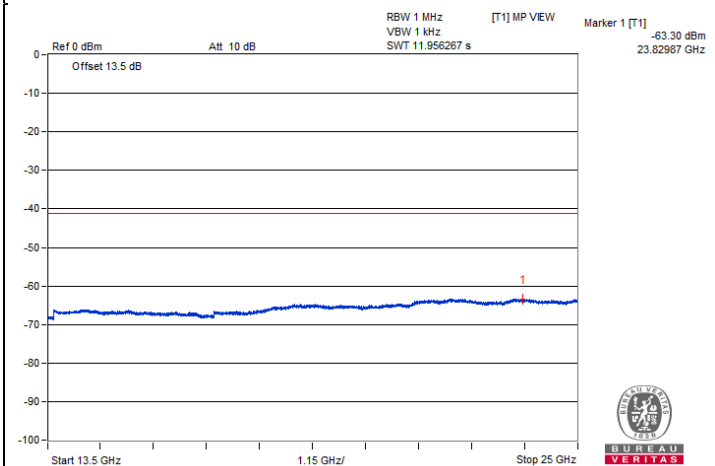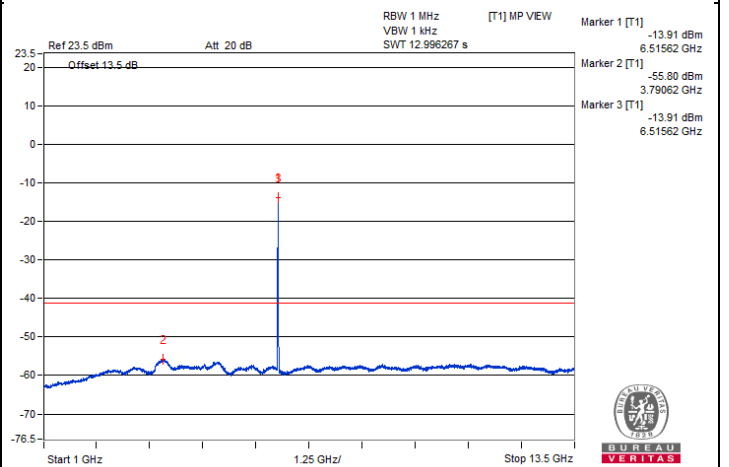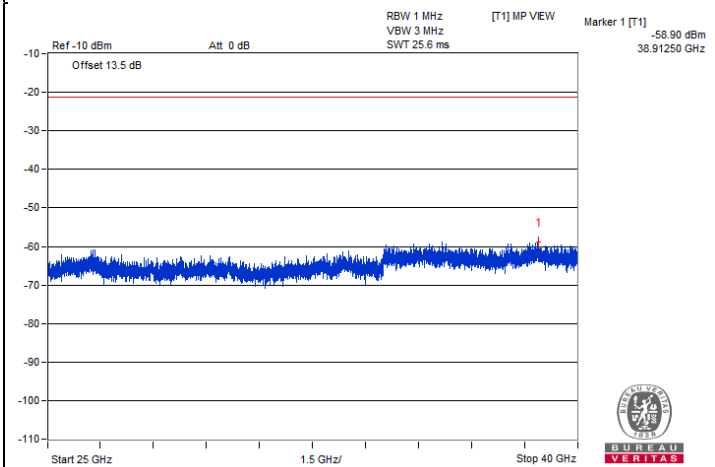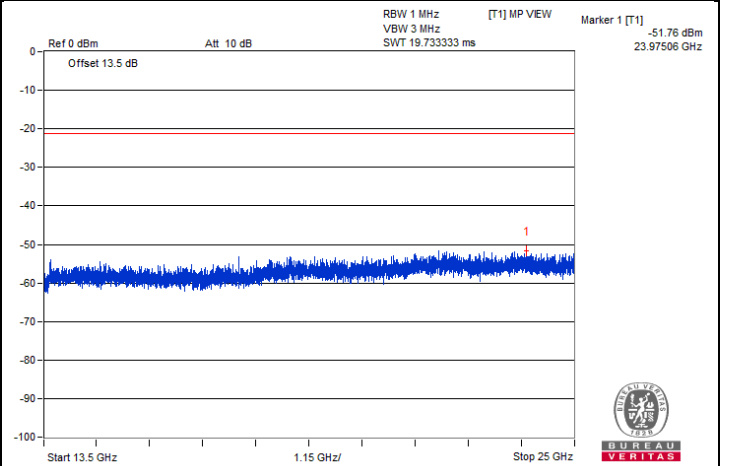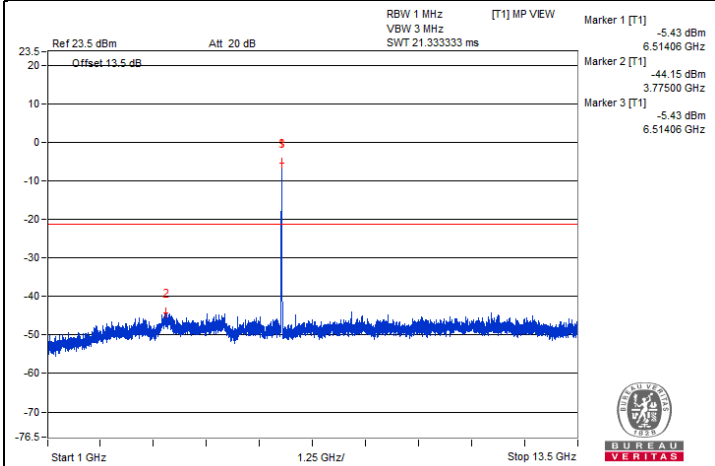



### Chain 1

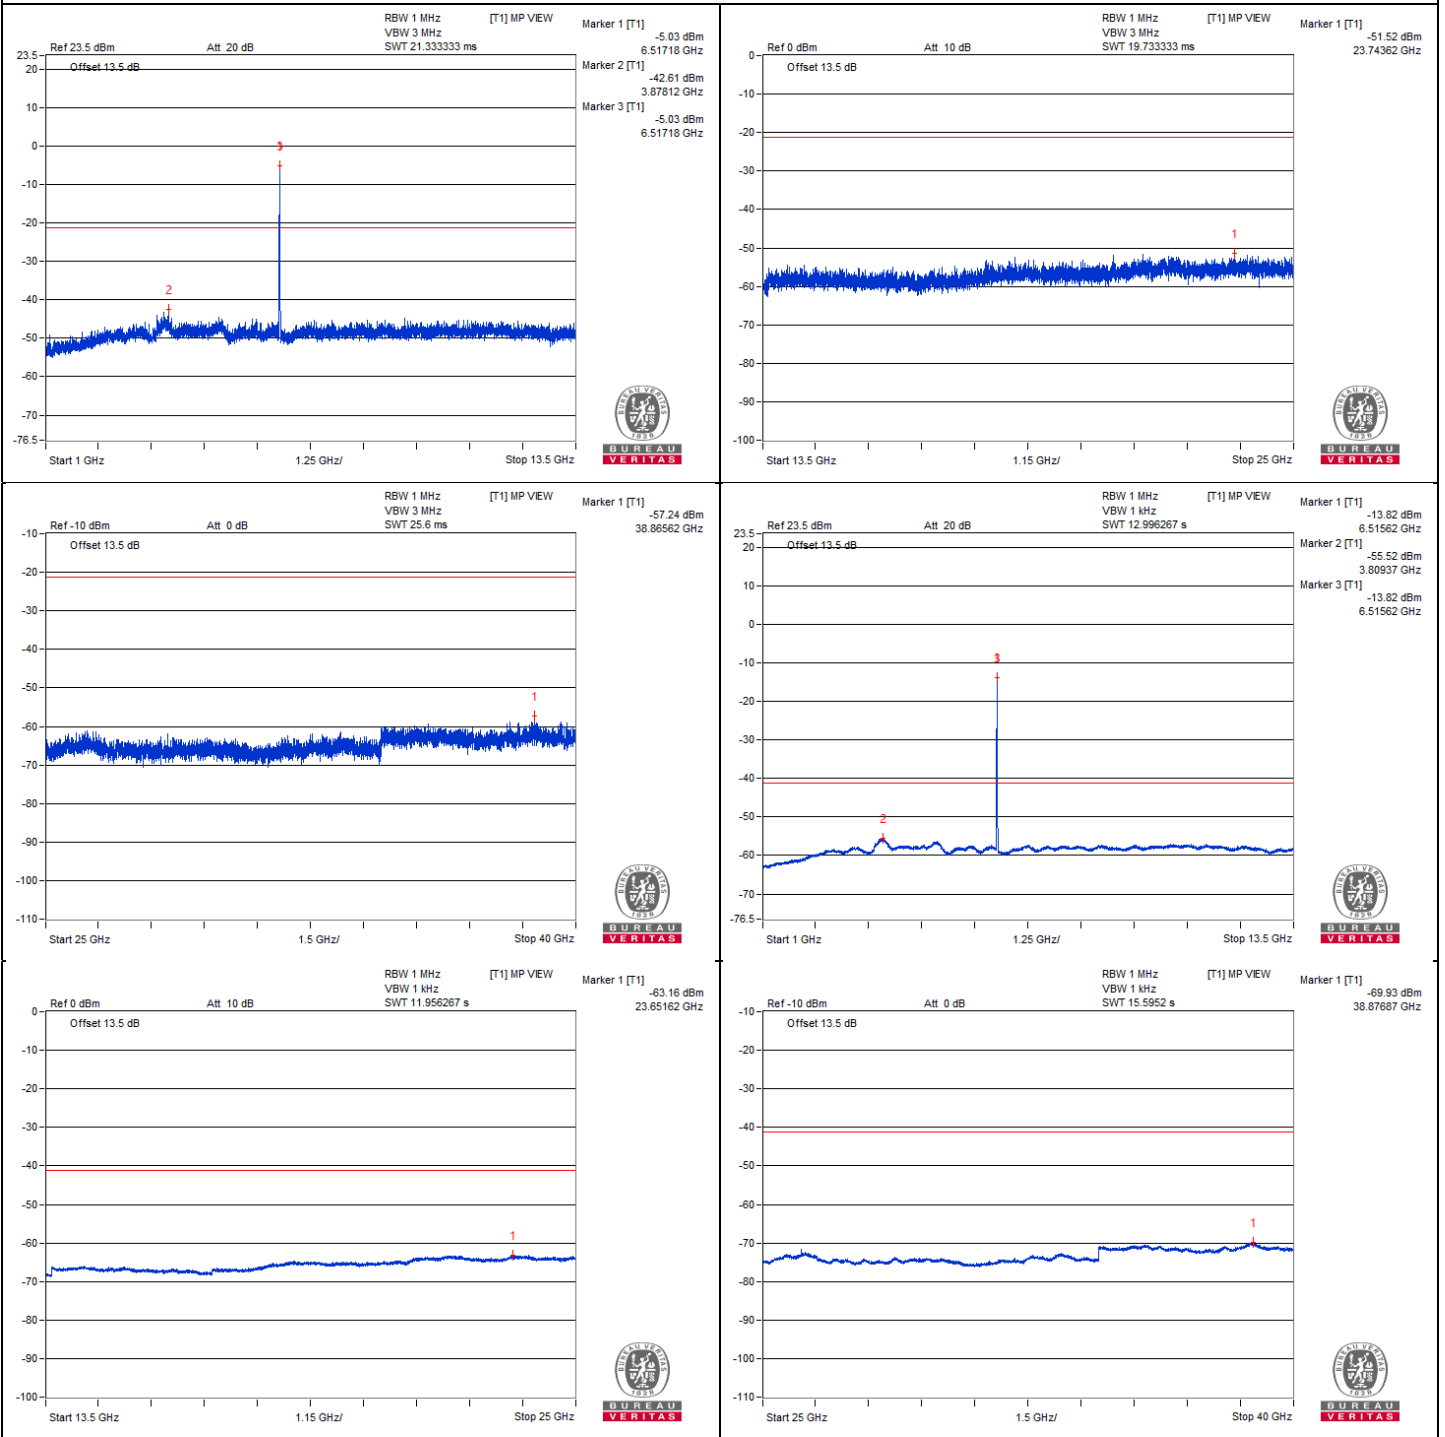

**802.11a - Channel 117**
**Conducted spurious emission table**







| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #13062.5        | 58.1 PK                 | 88.2           | -30.1       | -49.34          | -47.52 | 8.17                   | -37.16           |
| 2   | #13070.31       | 47.66 AV                | 68.2           | -20.54      | -59.01          | -58.57 | 8.17                   | -47.60           |
| 3   | 19610.81        | 50.94 PK                | 74             | -23.06      | -55.5           | -55.51 | 8.17                   | -44.32           |
| 4   | 19609.37        | 40.94 AV                | 54             | -13.06      | -65.49          | -65.51 | 8.17                   | -54.32           |

**Remarks:**

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




### Chain 0

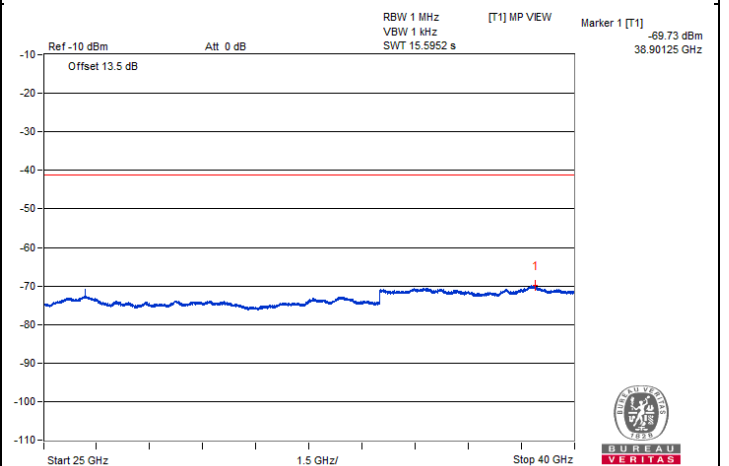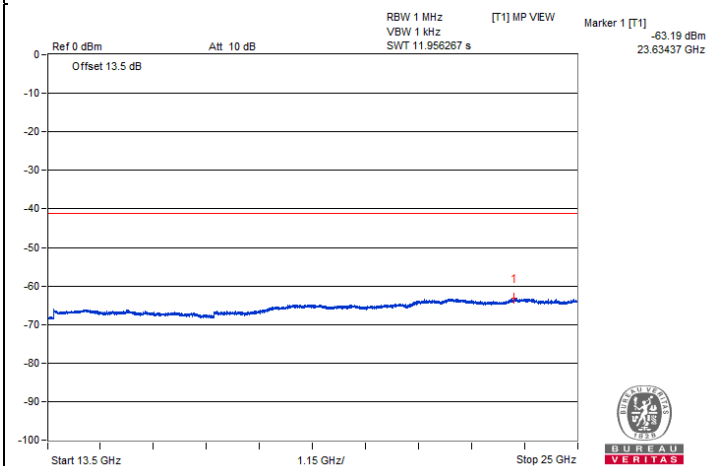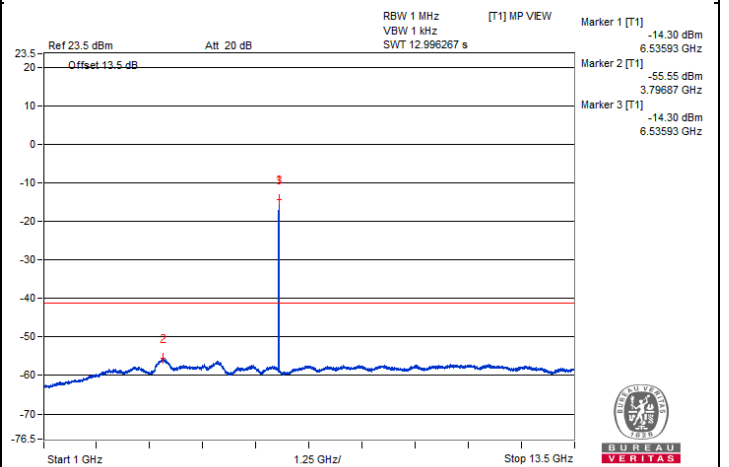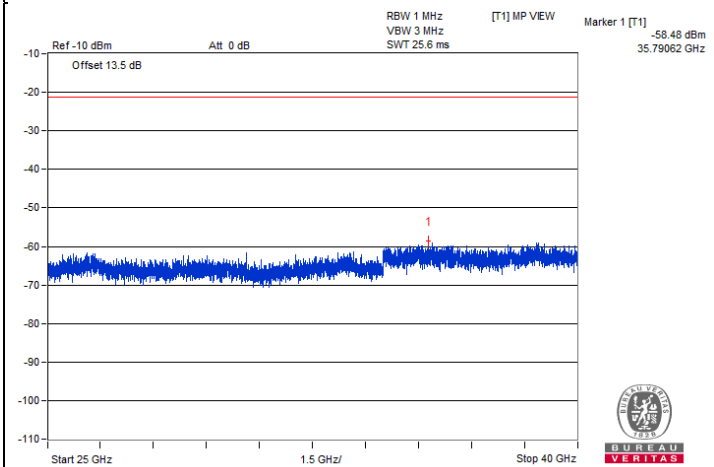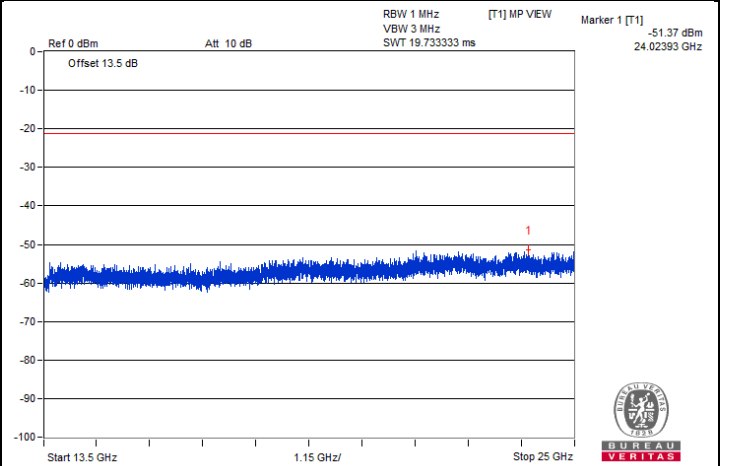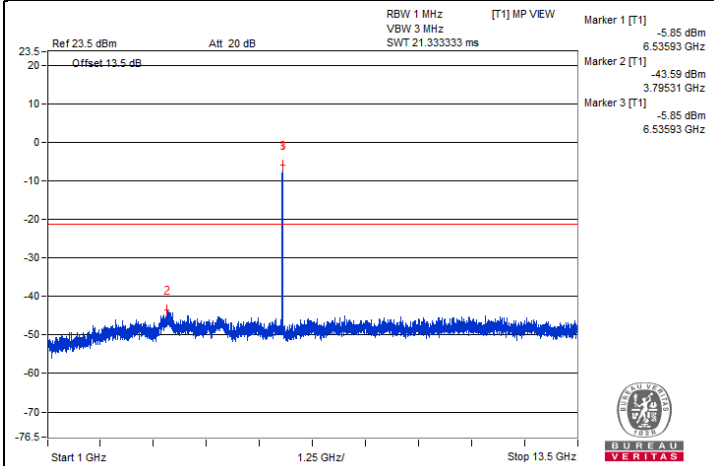



### Chain 1

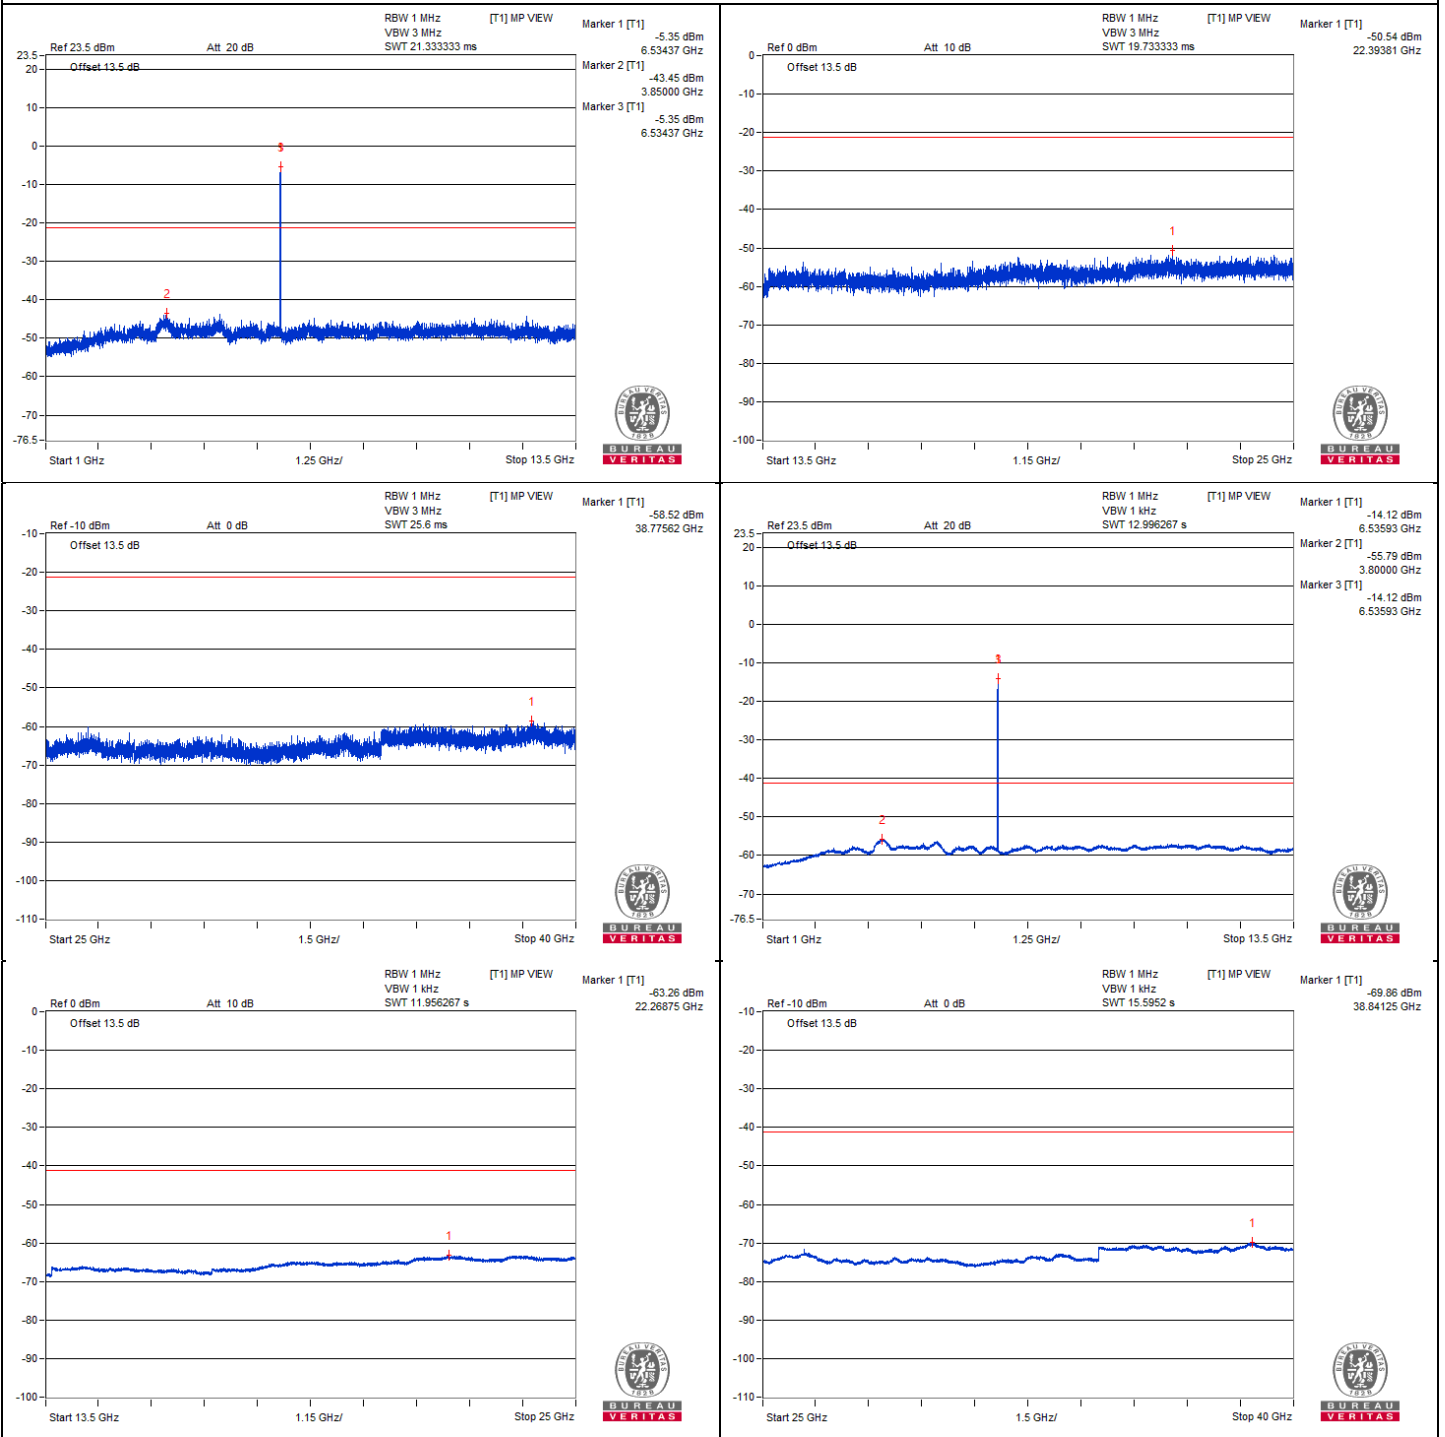



**802.11a - Channel 149**
**Conducted spurious emission table**


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 13393.75        | 58.48 PK                | 74             | -15.52      | -47.76          | -48.16 | 8.17                   | -36.78           |
| 2   | 13381.25        | 47.86 AV                | 54             | -6.14       | -58.61          | -58.55 | 8.17                   | -47.40           |
| 3   | 20089.5         | 50.48 PK                | 74             | -23.52      | -55.66          | -56.28 | 8.17                   | -44.78           |
| 4   | 20079.43        | 41.26 AV                | 54             | -12.74      | -65.05          | -65.32 | 8.17                   | -54.00           |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.




### Chain 0

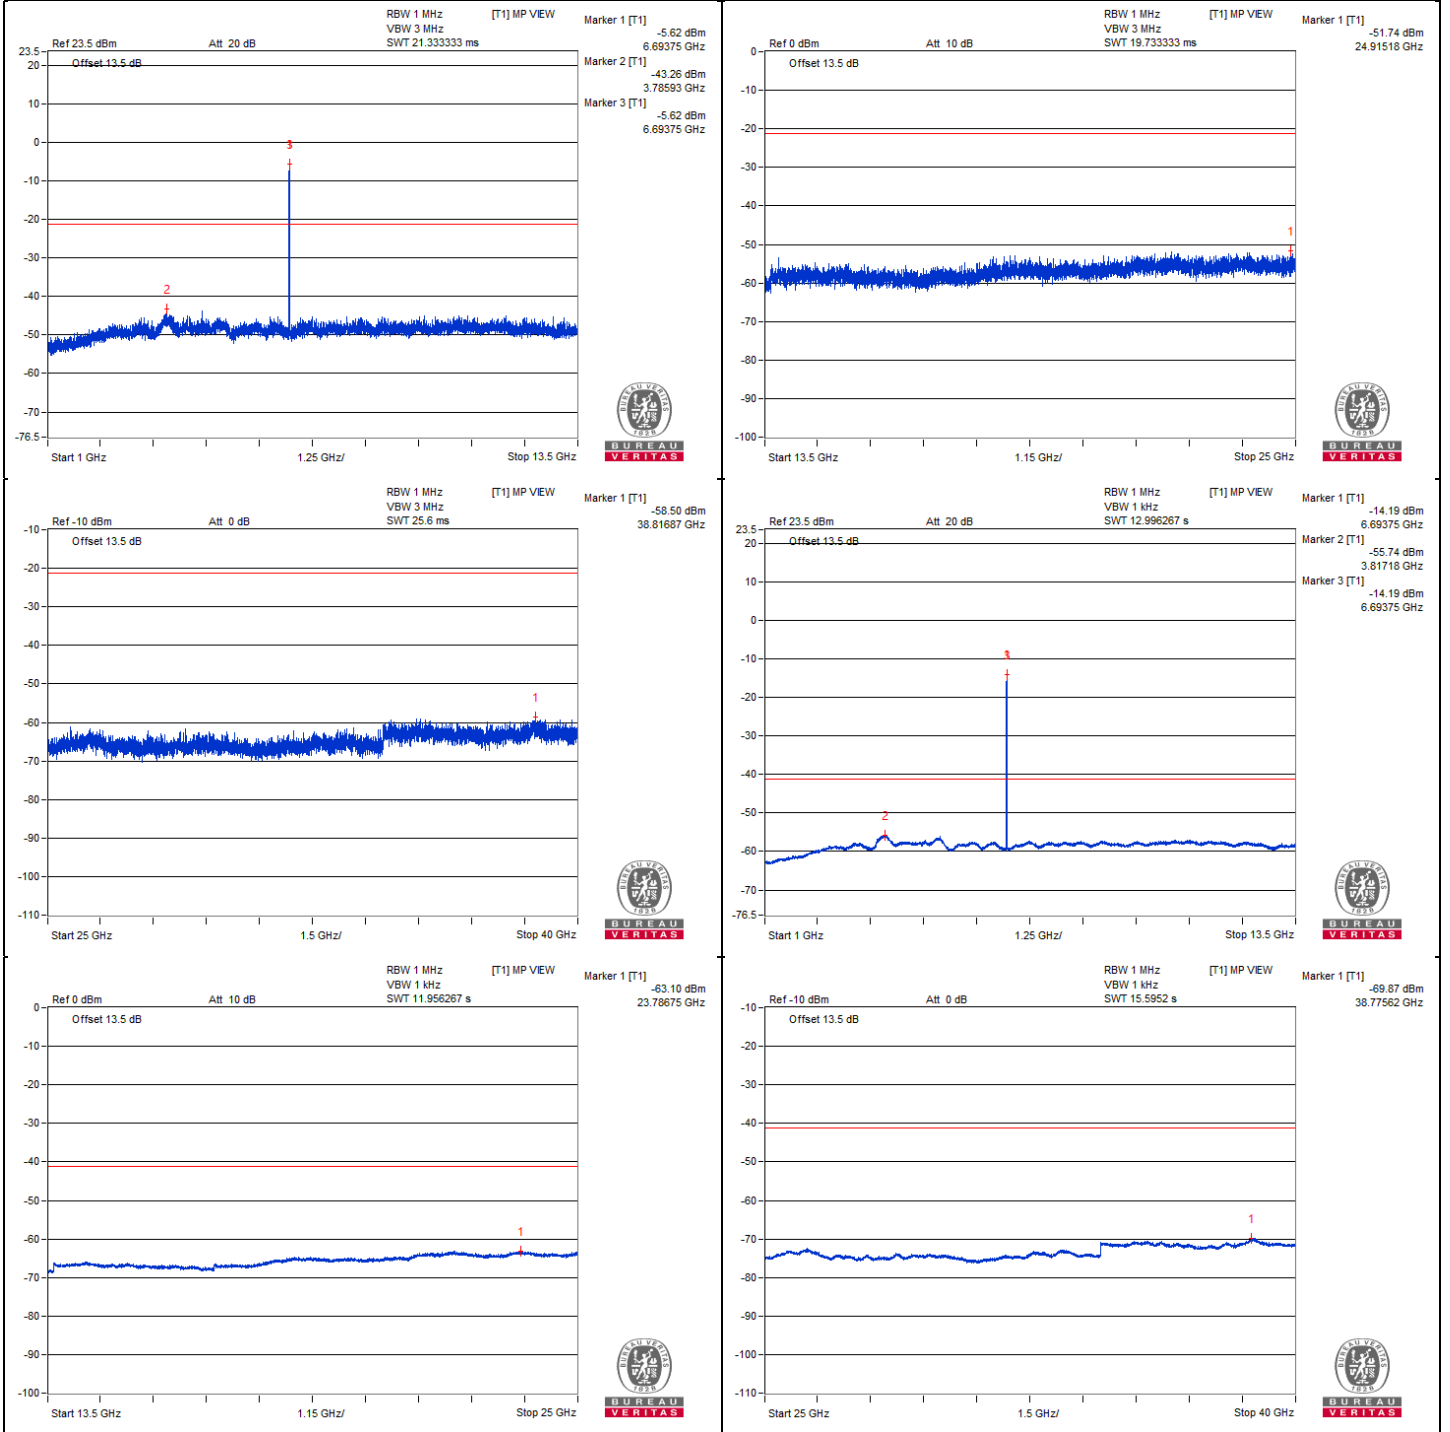



### Chain 1

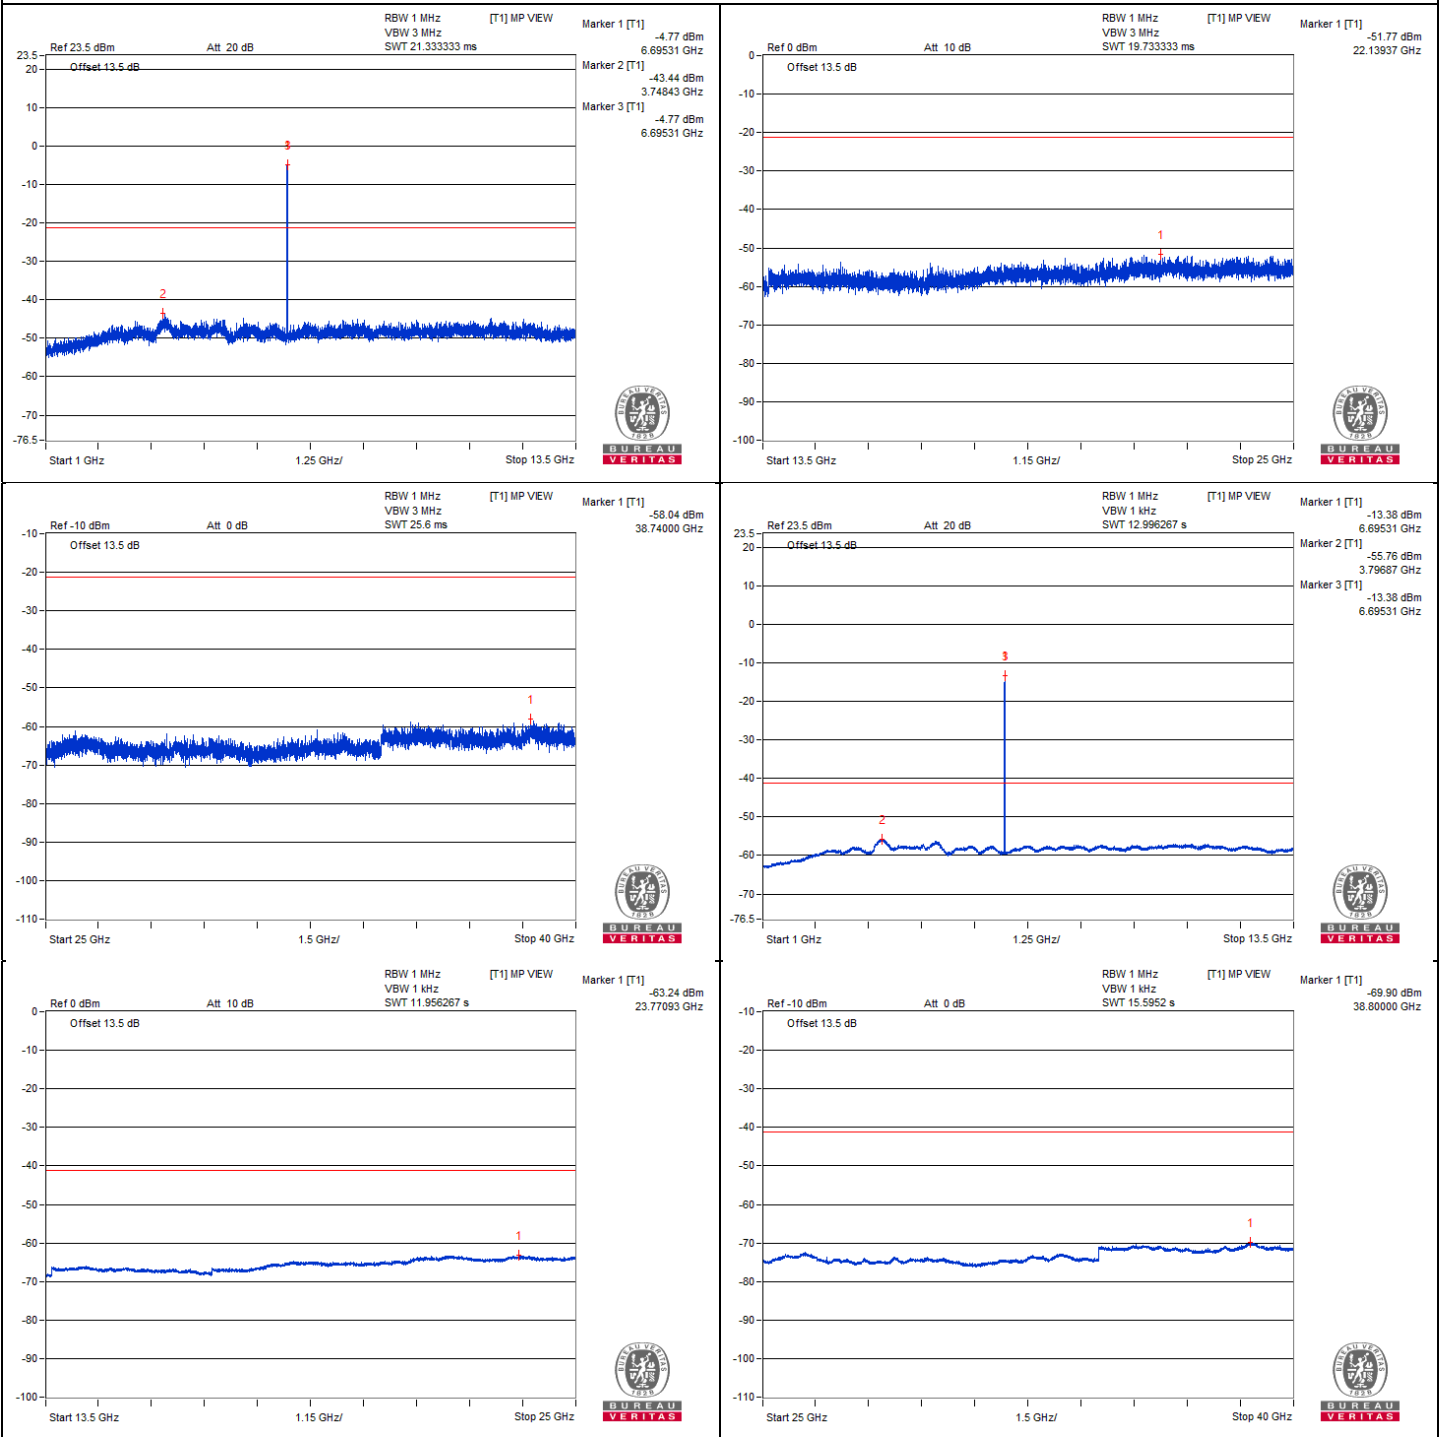

### 802.11a - Channel 181

#### Conducted spurious emission table


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #13718.5        | 49.15 PK                | 88.2           | -39.05      | -56.99          | -57.61 | 8.17                   | -46.11           |
| 2   | #13712.75       | 39.6 AV                 | 68.2           | -28.6       | -66.93          | -66.75 | 8.17                   | -55.66           |
| 3   | 20559.56        | 50.86 PK                | 74             | -23.14      | -56.22          | -55.03 | 8.17                   | -44.40           |
| 4   | 20568.18        | 41.13 AV                | 54             | -12.87      | -65.3           | -65.32 | 8.17                   | -54.13           |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




### Chain 0

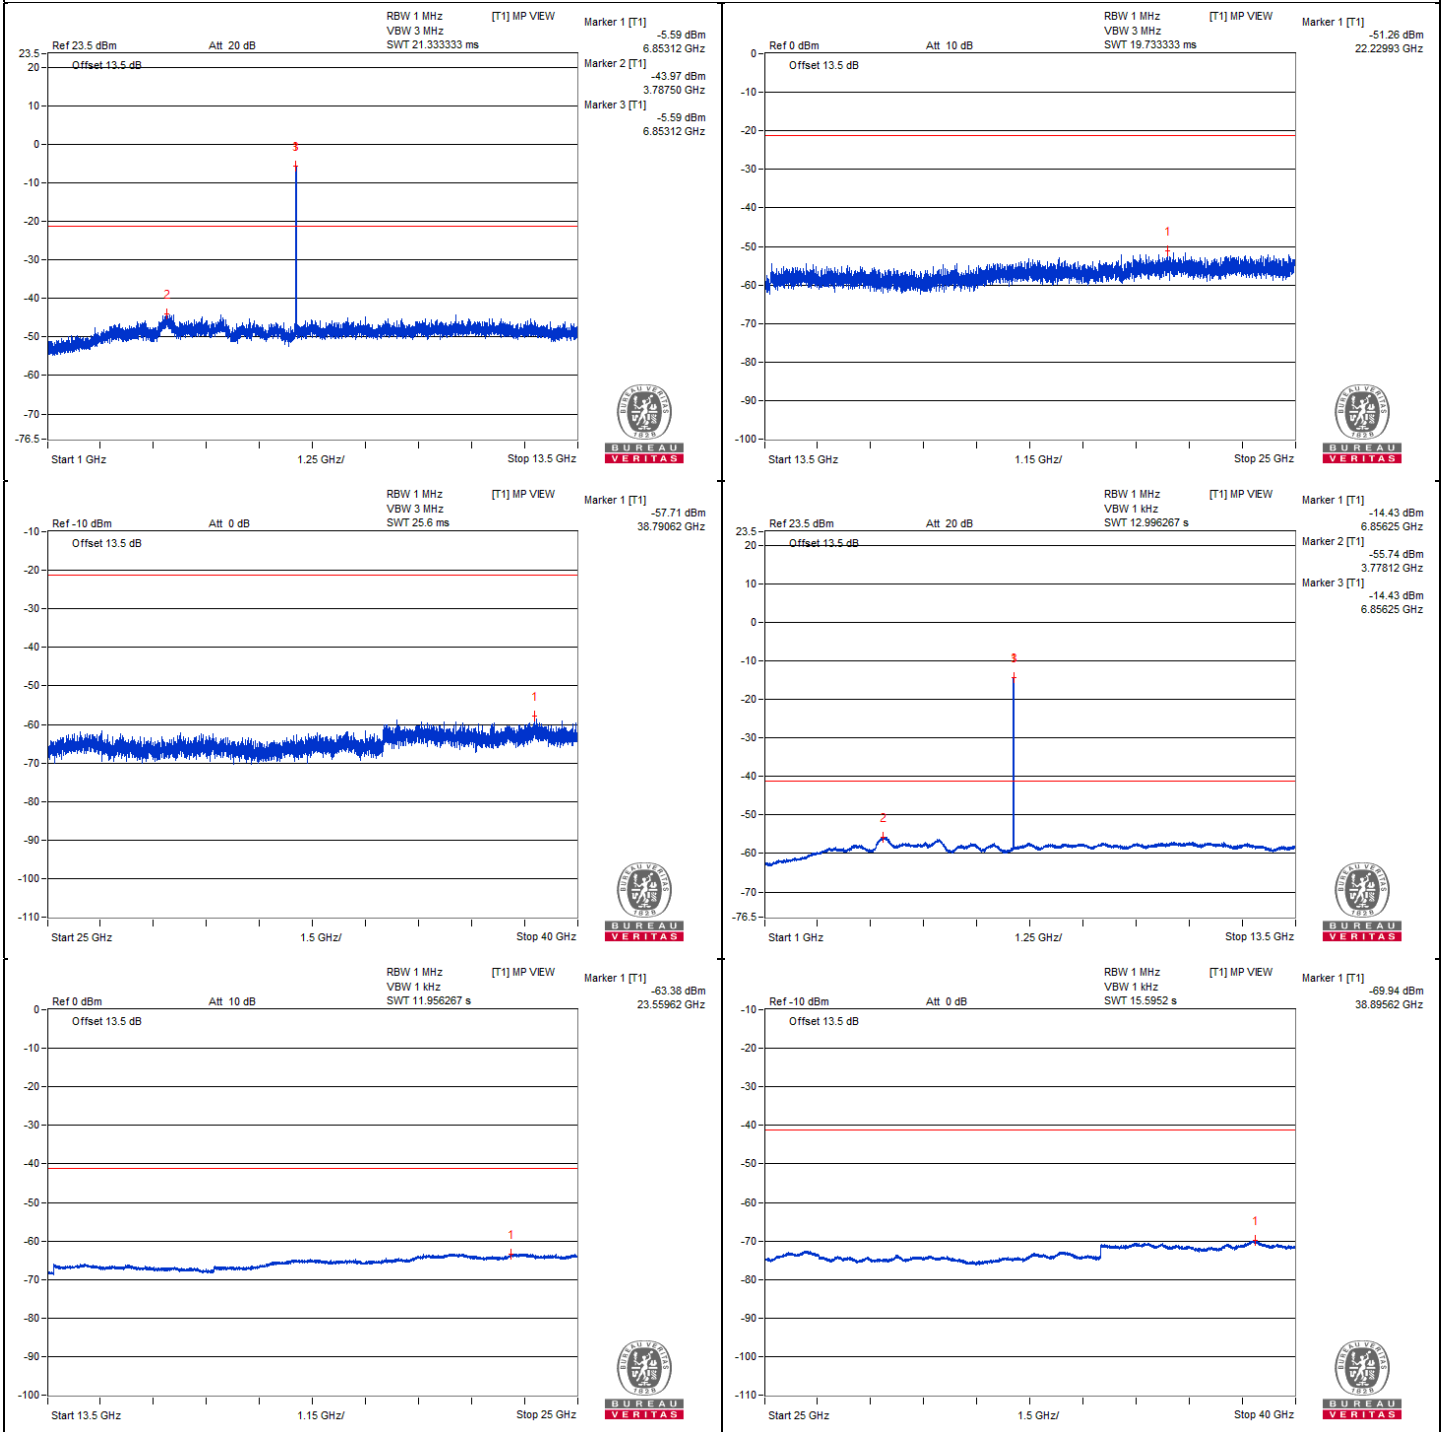



BUREAU VERITAS

### Chain 1

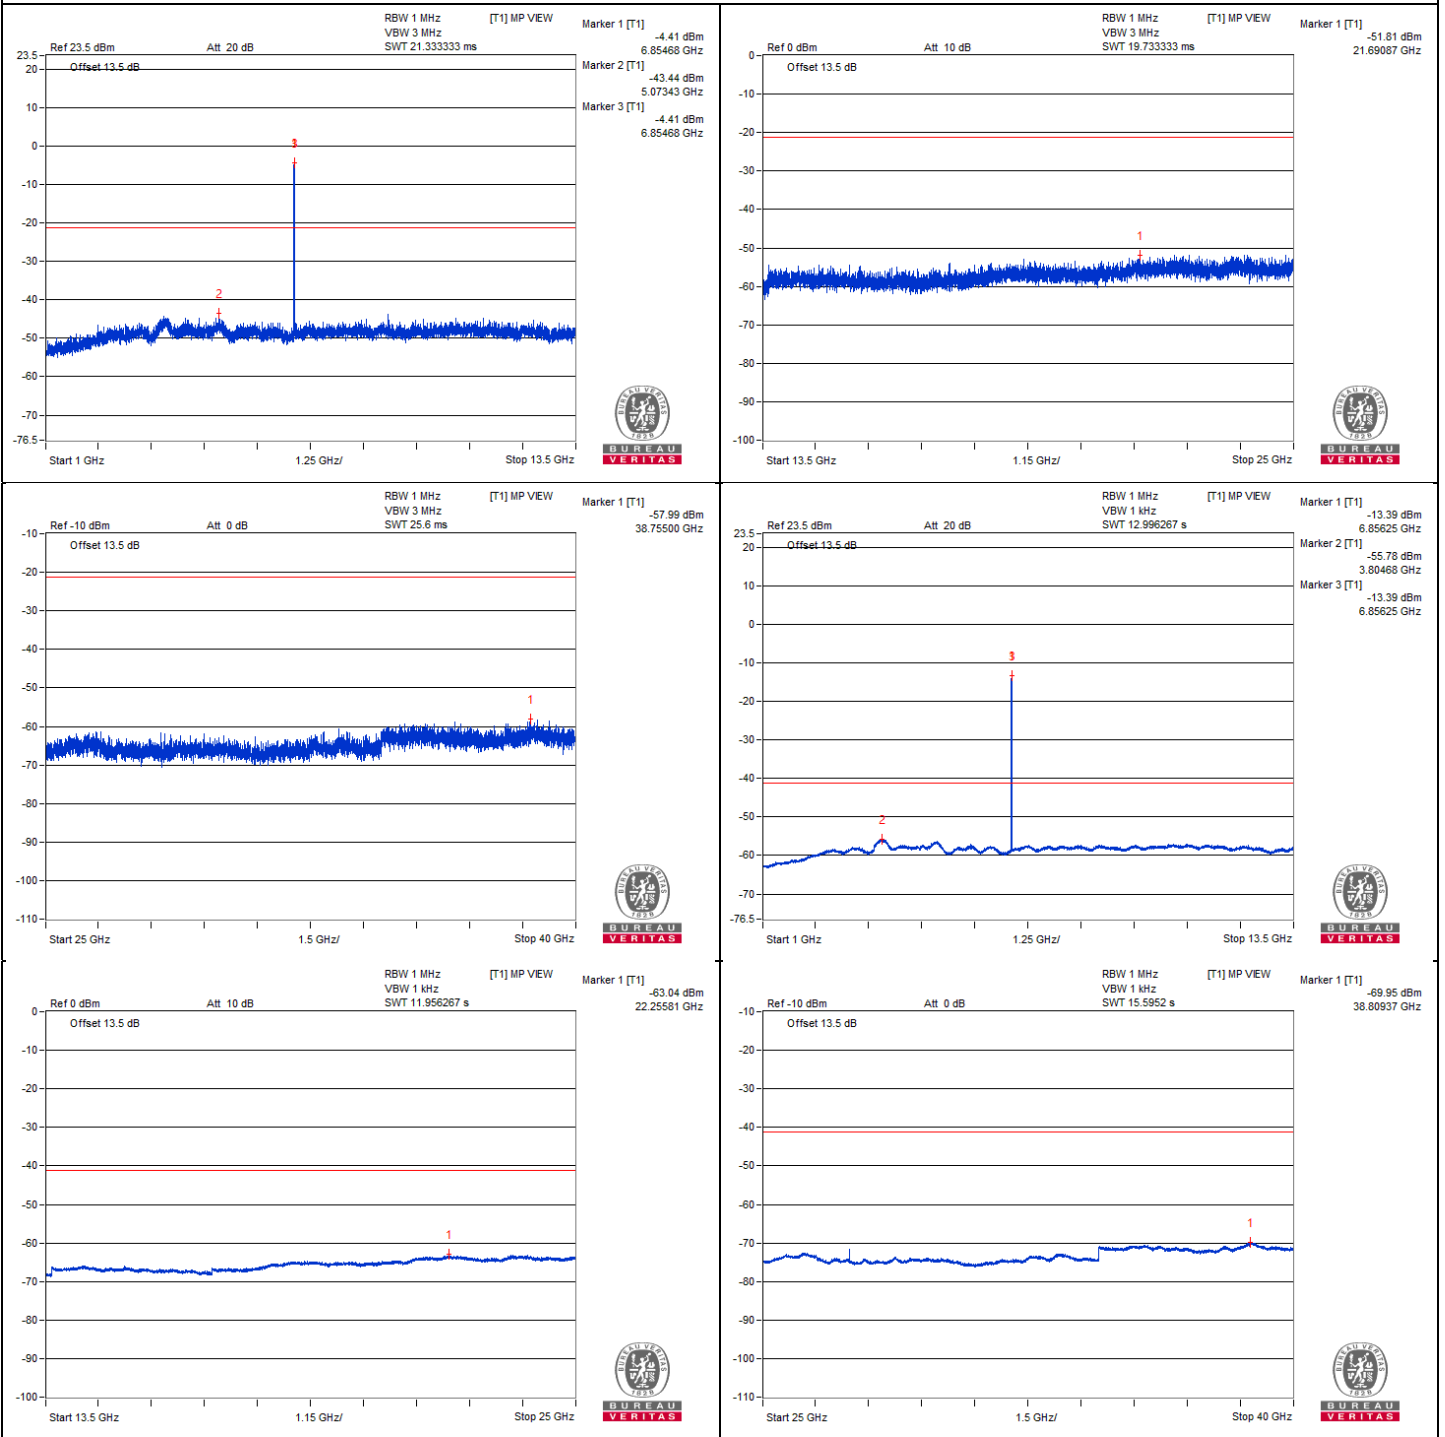

### 802.11a - Channel 185

#### Conducted spurious emission table







| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #13741.5        | 49.83 PK                | 88.2           | -38.37      | -58.82          | -55.15 | 8.17                   | -45.43           |
| 2   | #13747.25       | 39.58 AV                | 68.2           | -28.62      | -66.94          | -66.79 | 8.17                   | -55.68           |
| 3   | 20615.62        | 50.83 PK                | 74             | -23.17      | -55.49          | -55.73 | 8.17                   | -44.43           |
| 4   | 20632.87        | 41.18 AV                | 54             | -12.82      | -65             | -65.53 | 8.17                   | -54.08           |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




### Chain 0

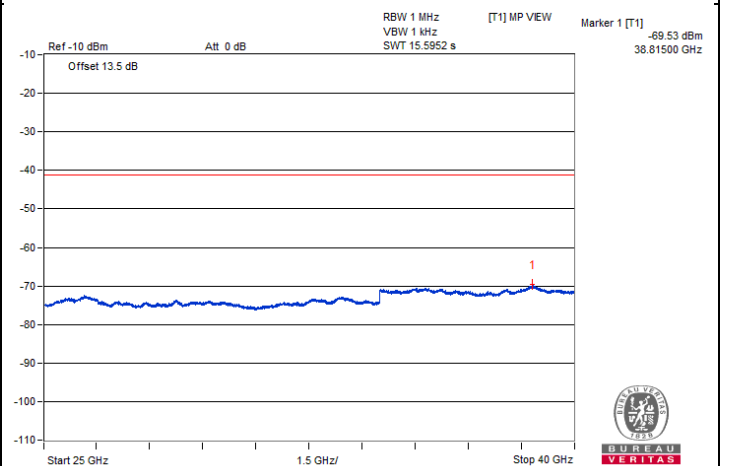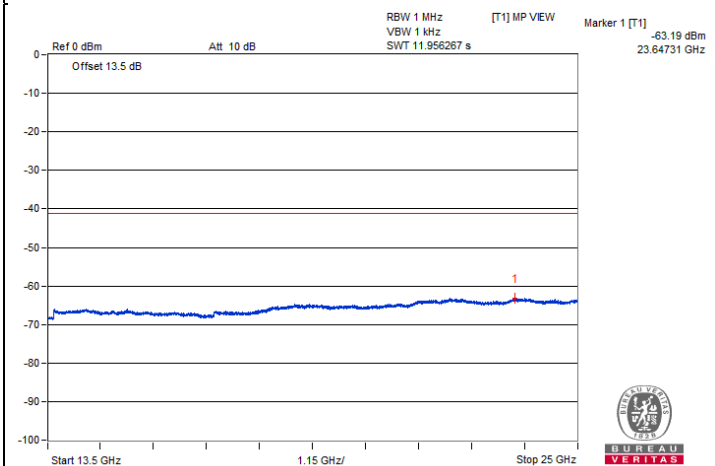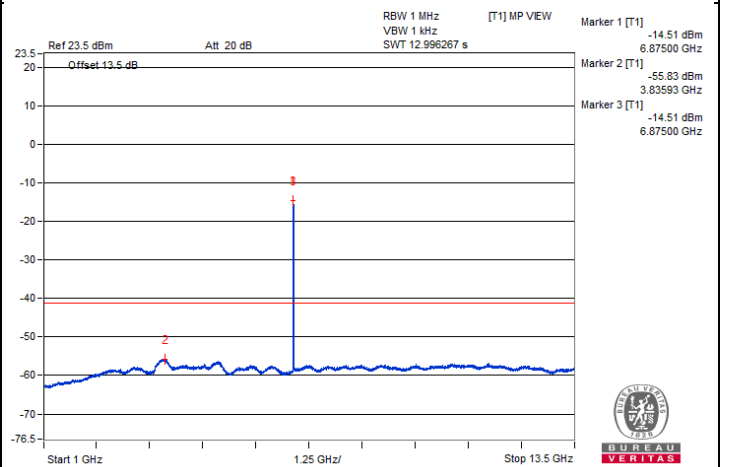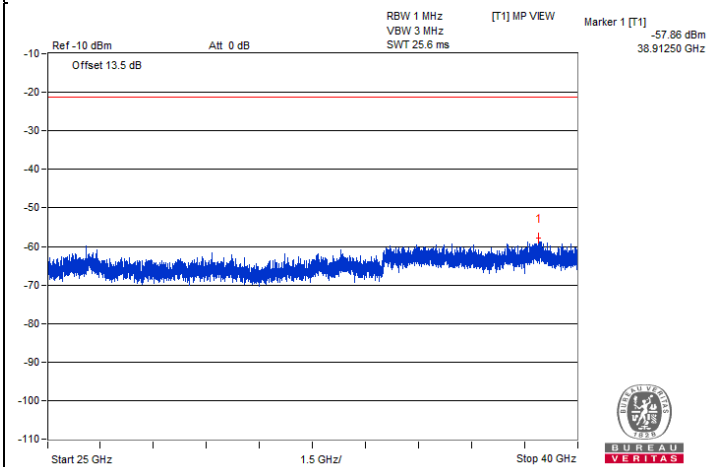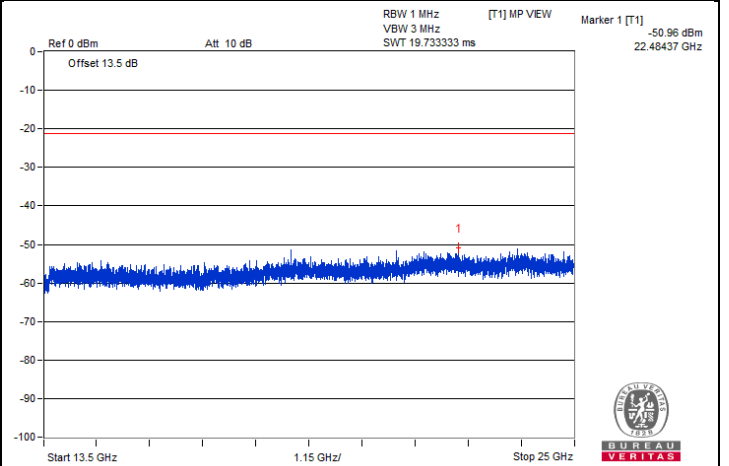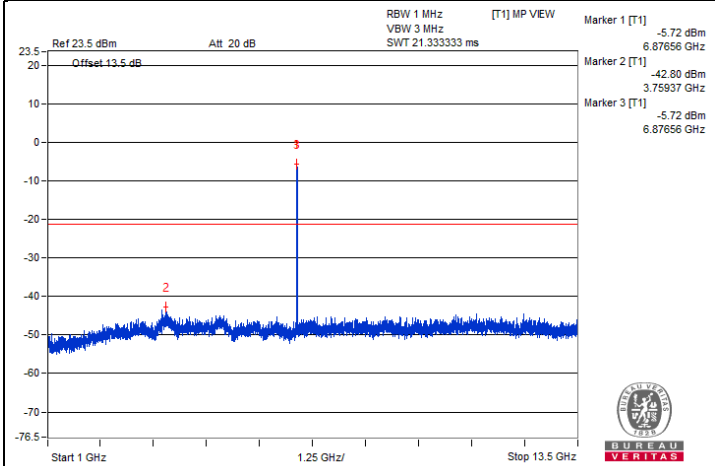





### Chain 1

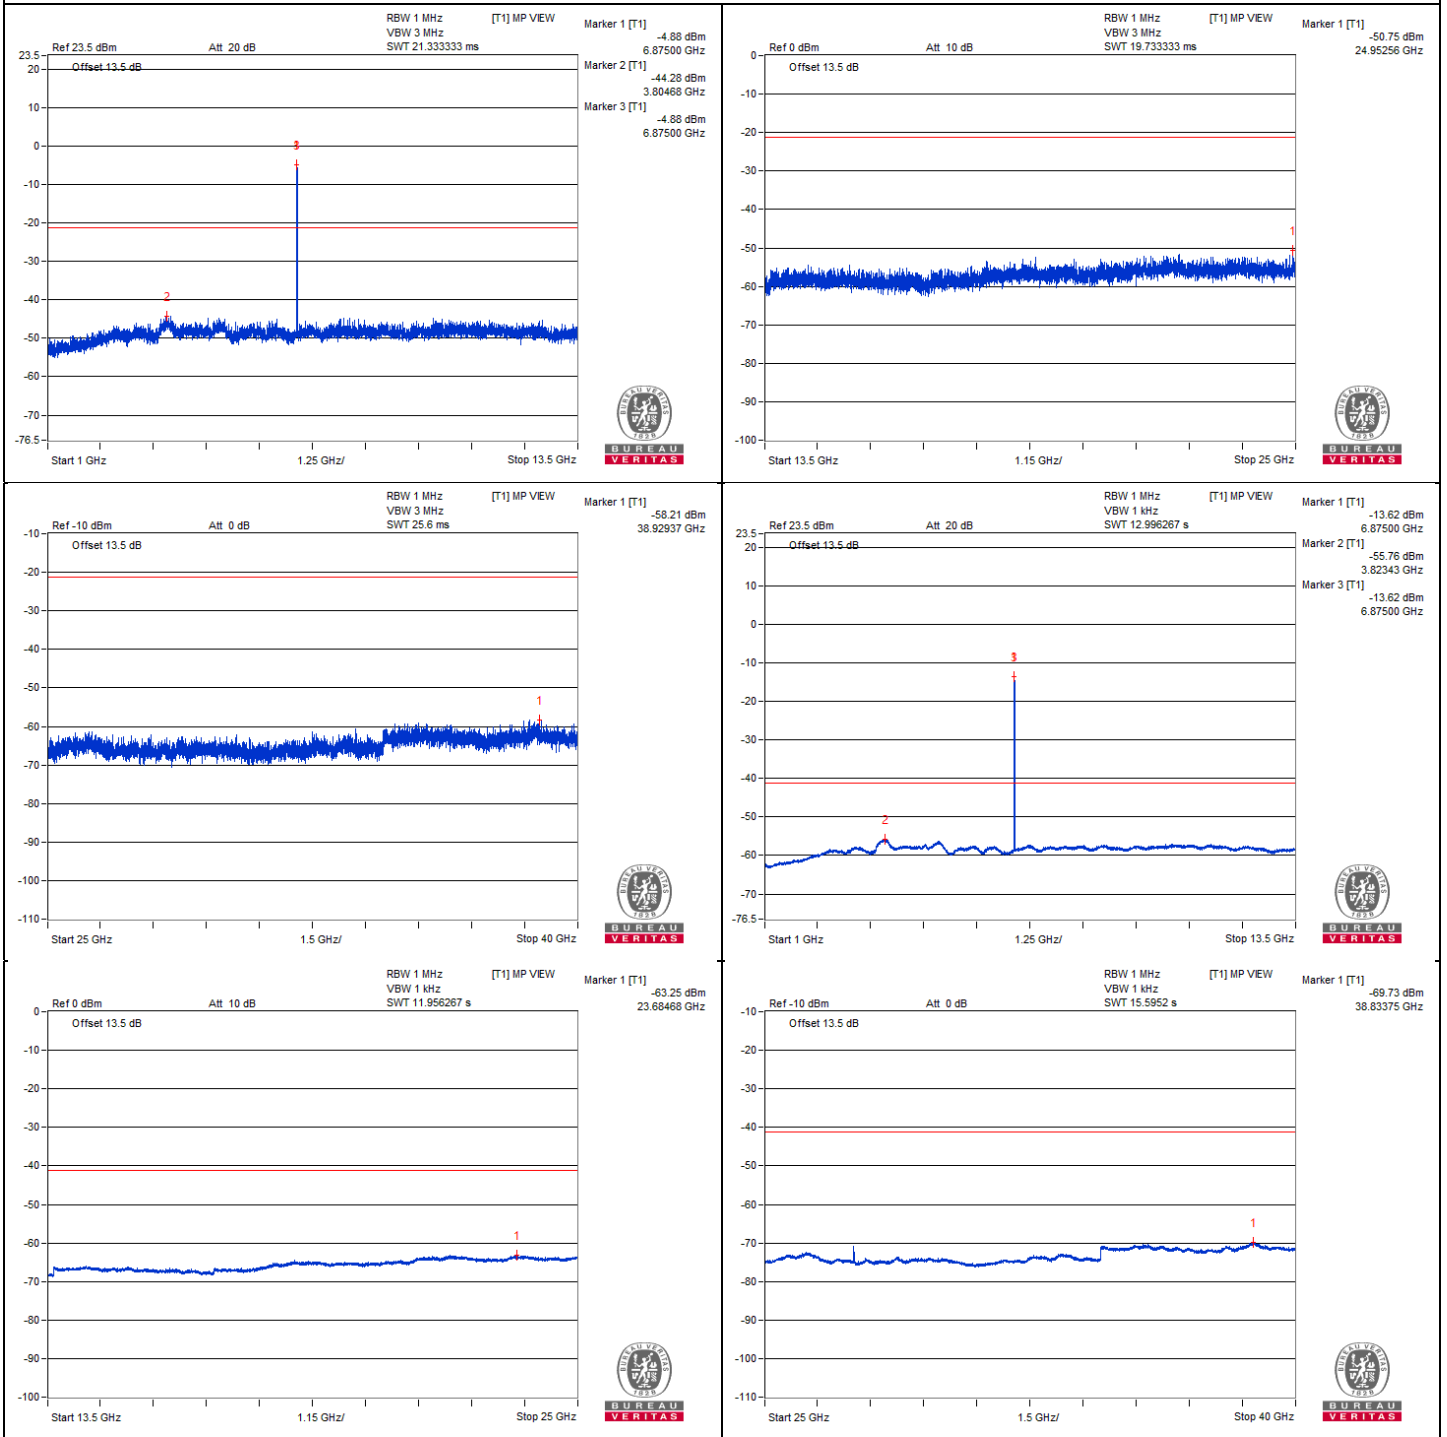

**802.11a - Channel 209**
**Conducted spurious emission table**


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #13980.12       | 49.06 PK                | 88.2           | -39.14      | -57.94          | -56.88 | 8.17                   | -46.20           |
| 2   | #13985.87       | 39.82 AV                | 68.2           | -28.38      | -66.69          | -66.56 | 8.17                   | -55.44           |
| 3   | 20987.93        | 51.1 PK                 | 74             | -22.9       | -54.76          | -56.02 | 8.17                   | -44.16           |
| 4   | 20976.43        | 41.26 AV                | 54             | -12.74      | -65.13          | -65.23 | 8.17                   | -54.00           |

**Remarks:**

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




### Chain 0

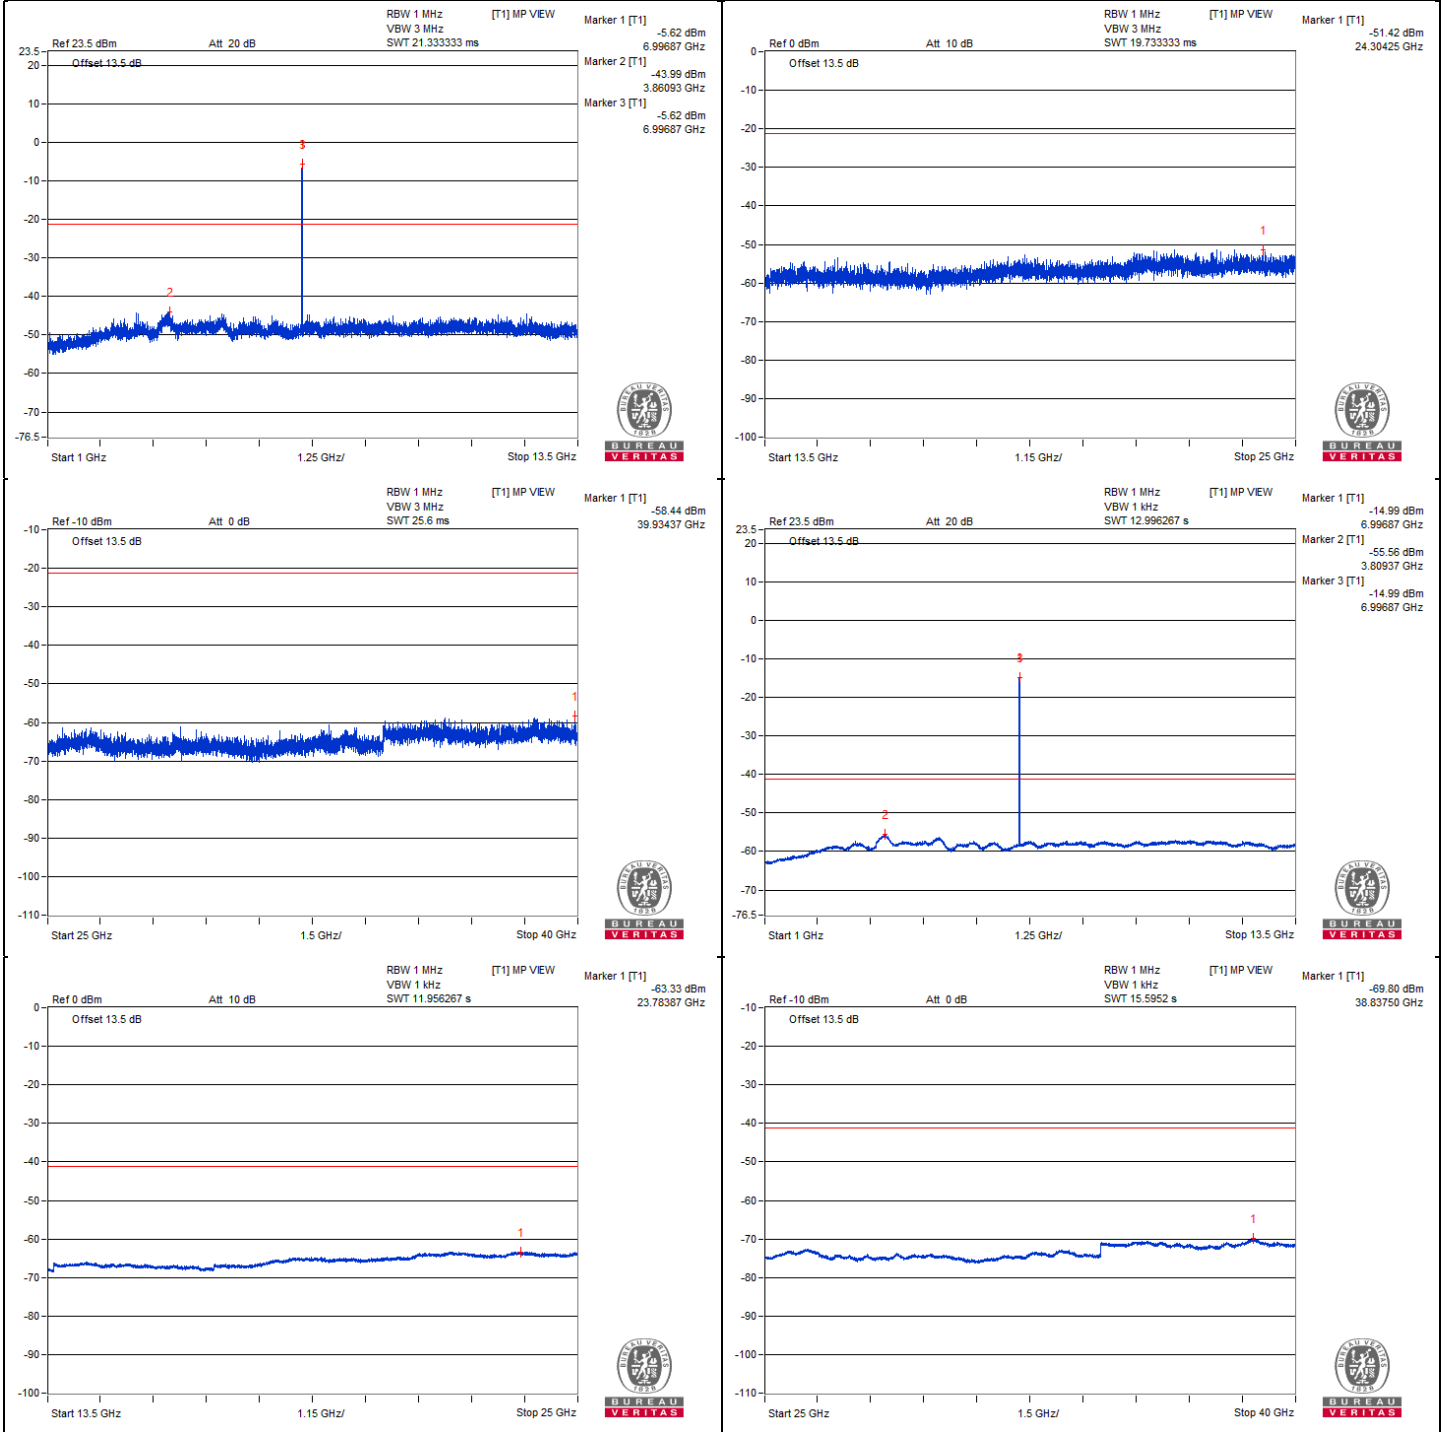



### Chain 1

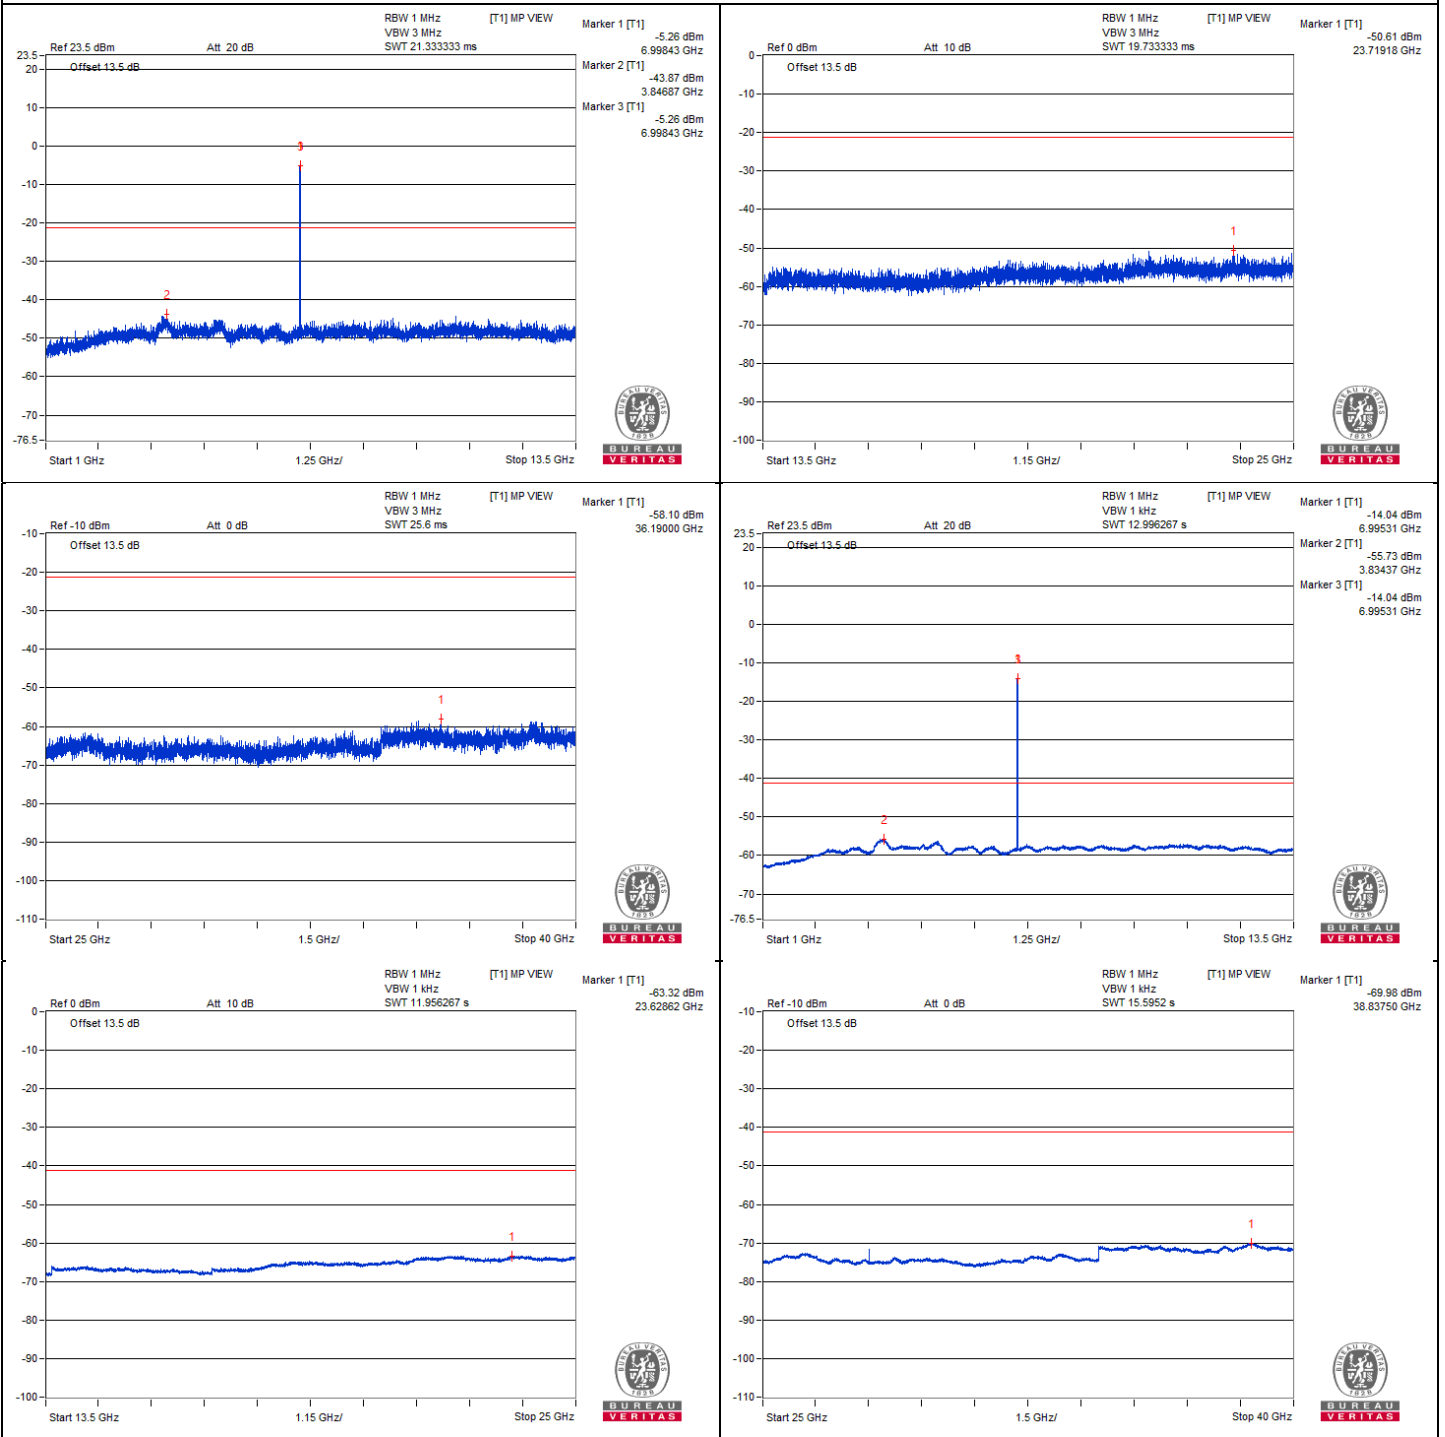

### 802.11a - Channel 233

#### Conducted spurious emission table







| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #14220.18       | 49.92 PK                | 88.2           | -38.28      | -56.69          | -56.36 | 8.17                   | -45.34           |
| 2   | #14227.37       | 40.07 AV                | 68.2           | -28.13      | -66.29          | -66.46 | 8.17                   | -55.19           |
| 3   | 21341.56        | 50.89 PK                | 74             | -23.11      | -58.01          | -53.99 | 8.17                   | -44.37           |
| 4   | 21344.43        | 41.37 AV                | 54             | -12.63      | -65.22          | -64.92 | 8.17                   | -53.89           |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




### Chain 0

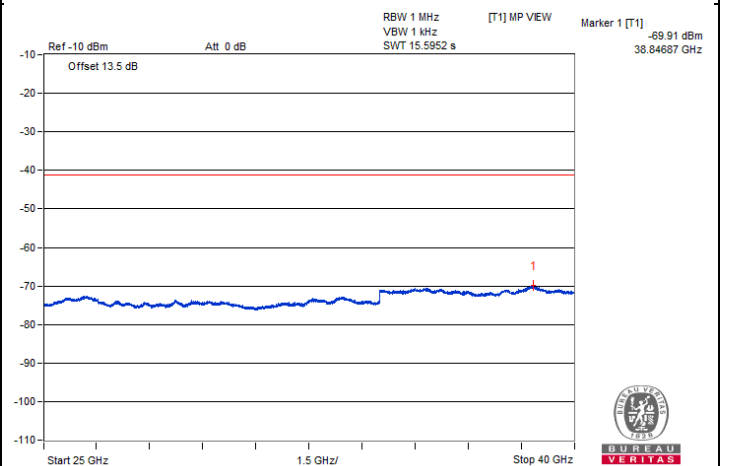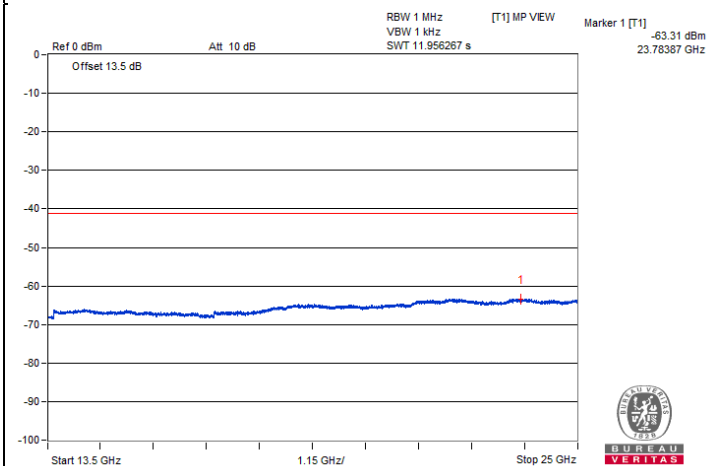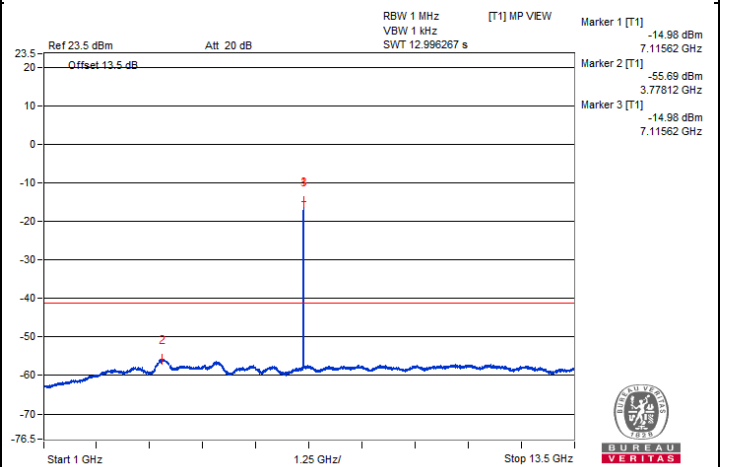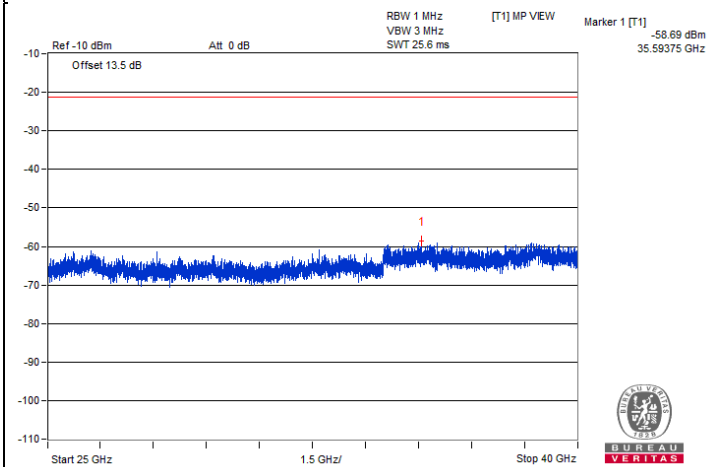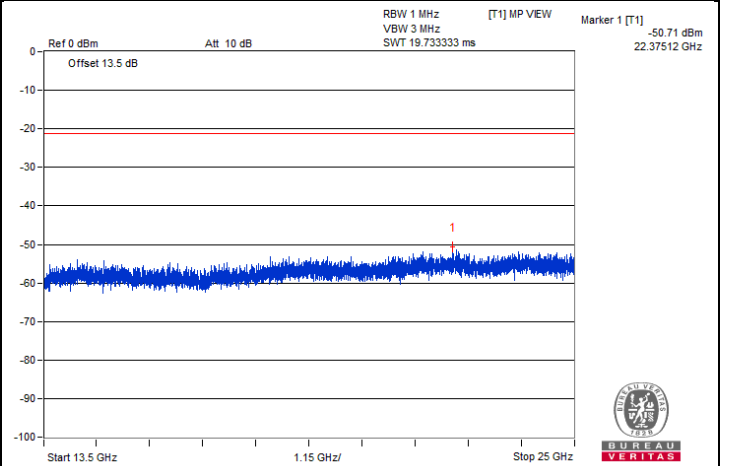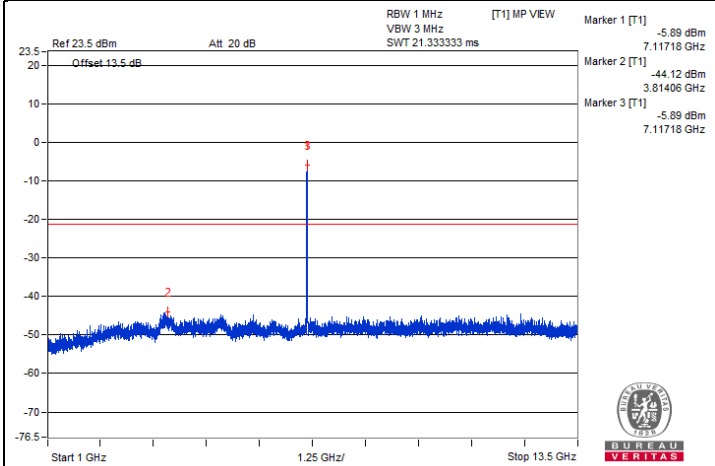



### Chain 1

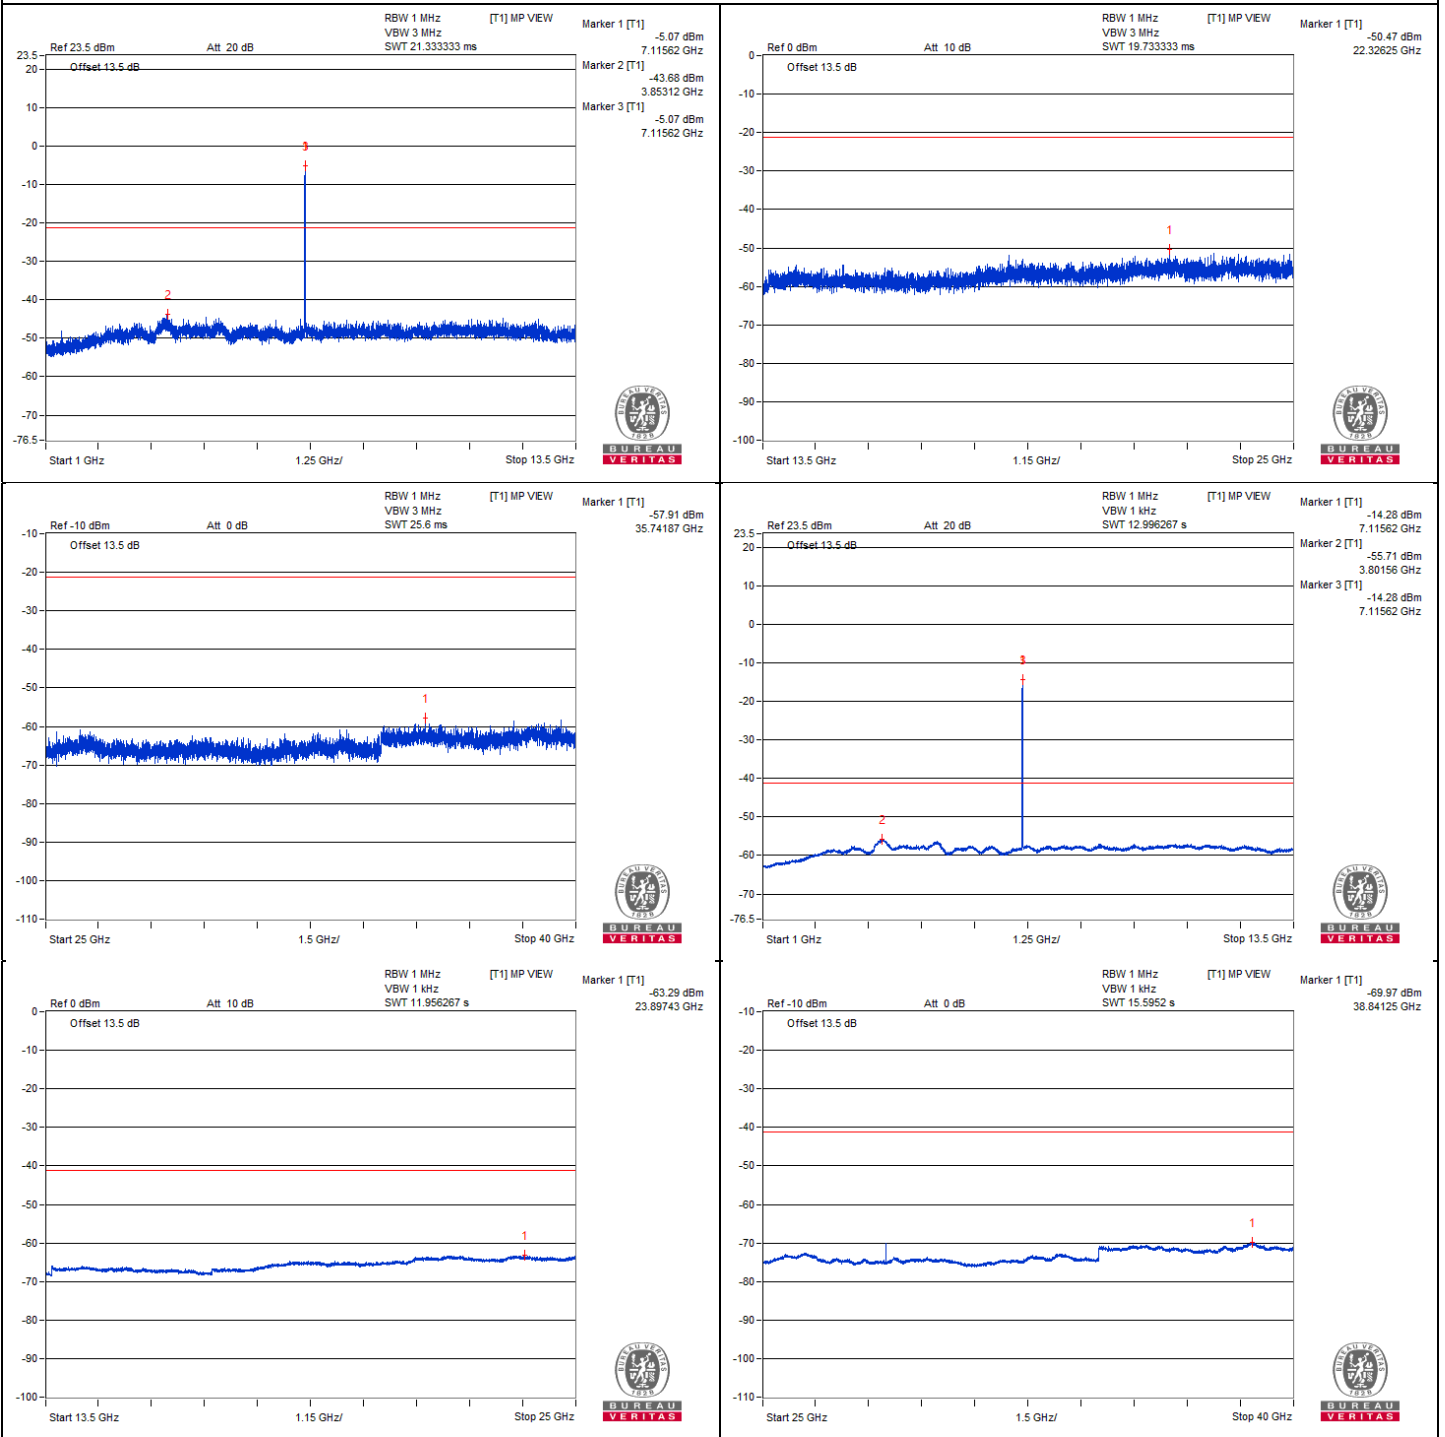


**Bandedge table**

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #7125.3         | 80.05 PK                | 88.2           | -8.15       | -26.3           | -26.4  | 8.13                   | -15.21           |
| 2   | #7125           | 67.33 AV                | 68.2           | -0.87       | -39.63          | -38.57 | 8.13                   | -27.93           |


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. "#": The frequency is out of the restricted band.

**Chain 0**

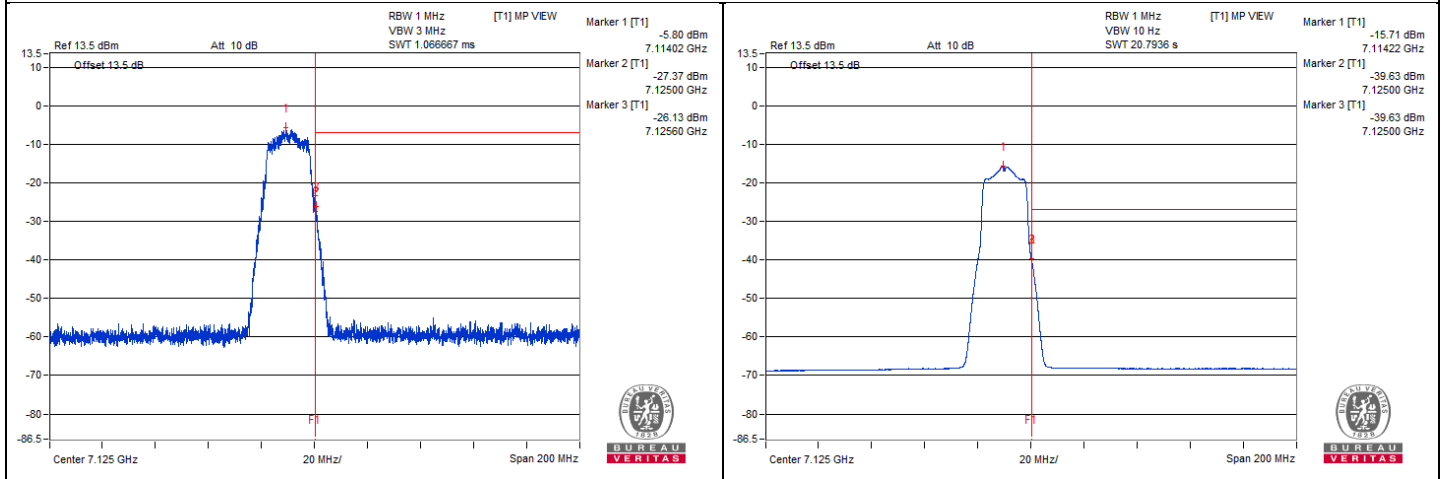

**Chain 1**

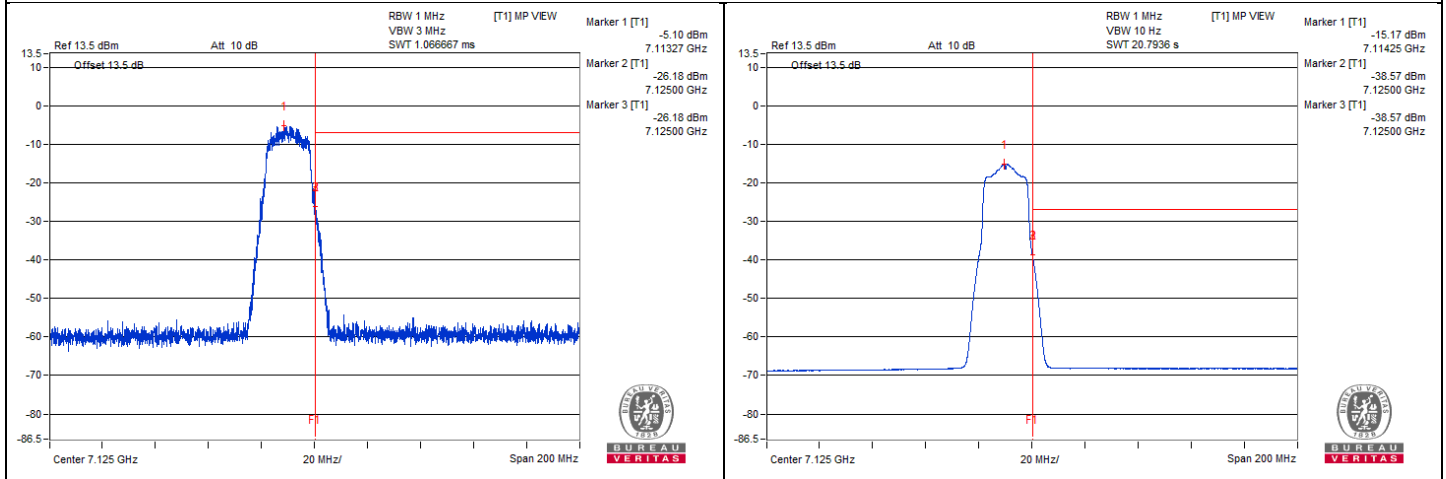



### 802.11be (EHT20) - Channel 2

#### Conducted spurious emission table


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 11860.93        | 59.33 PK                | 74             | -14.67      | -45.78          | -49.05 | 8.17                   | -35.93           |
| 2   | 11879.68        | 48.79 AV                | 54             | -5.21       | -57.43          | -57.88 | 8.17                   | -46.47           |
| 3   | 17806.75        | 49.17 PK                | 74             | -24.83      | -56.95          | -57.61 | 8.17                   | -46.09           |
| 4   | 17796.68        | 39.53 AV                | 54             | -14.47      | -67.04          | -66.79 | 8.17                   | -55.73           |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.




### Chain 0

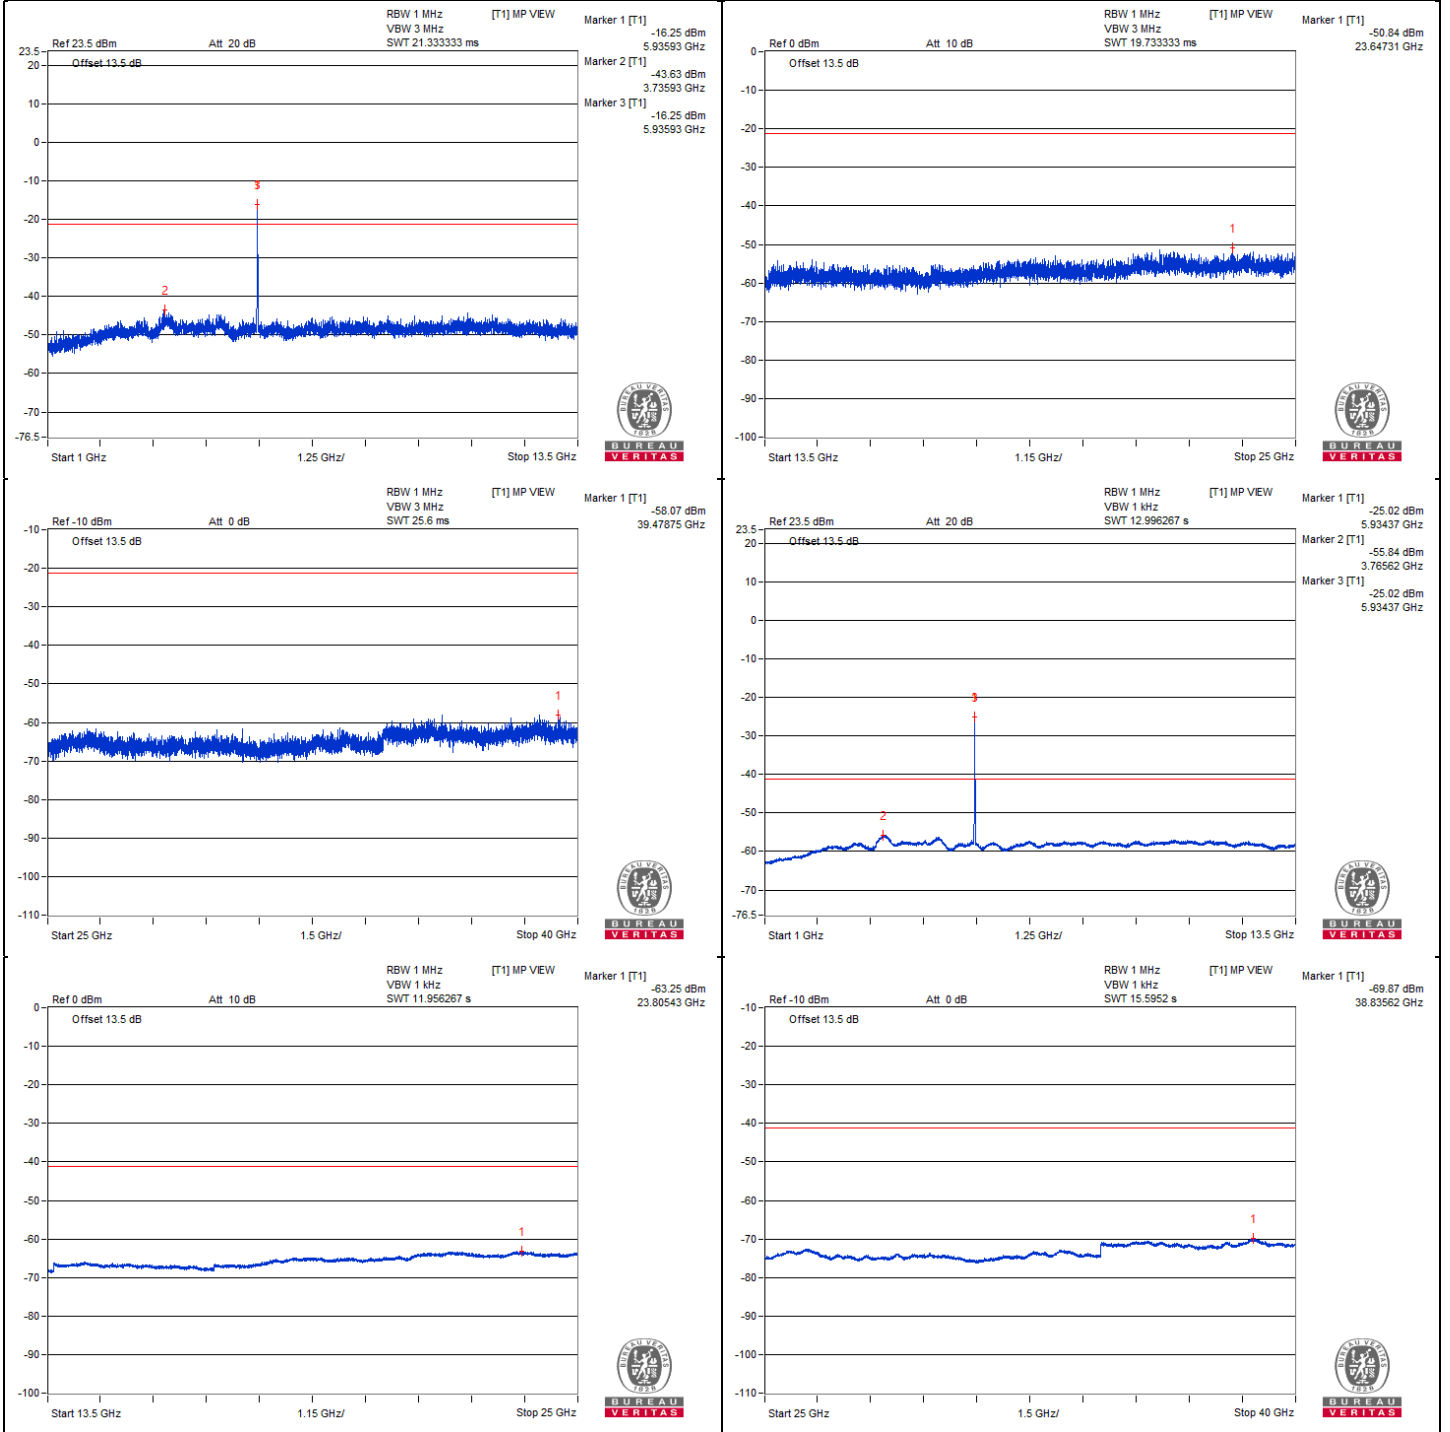



### Chain 1

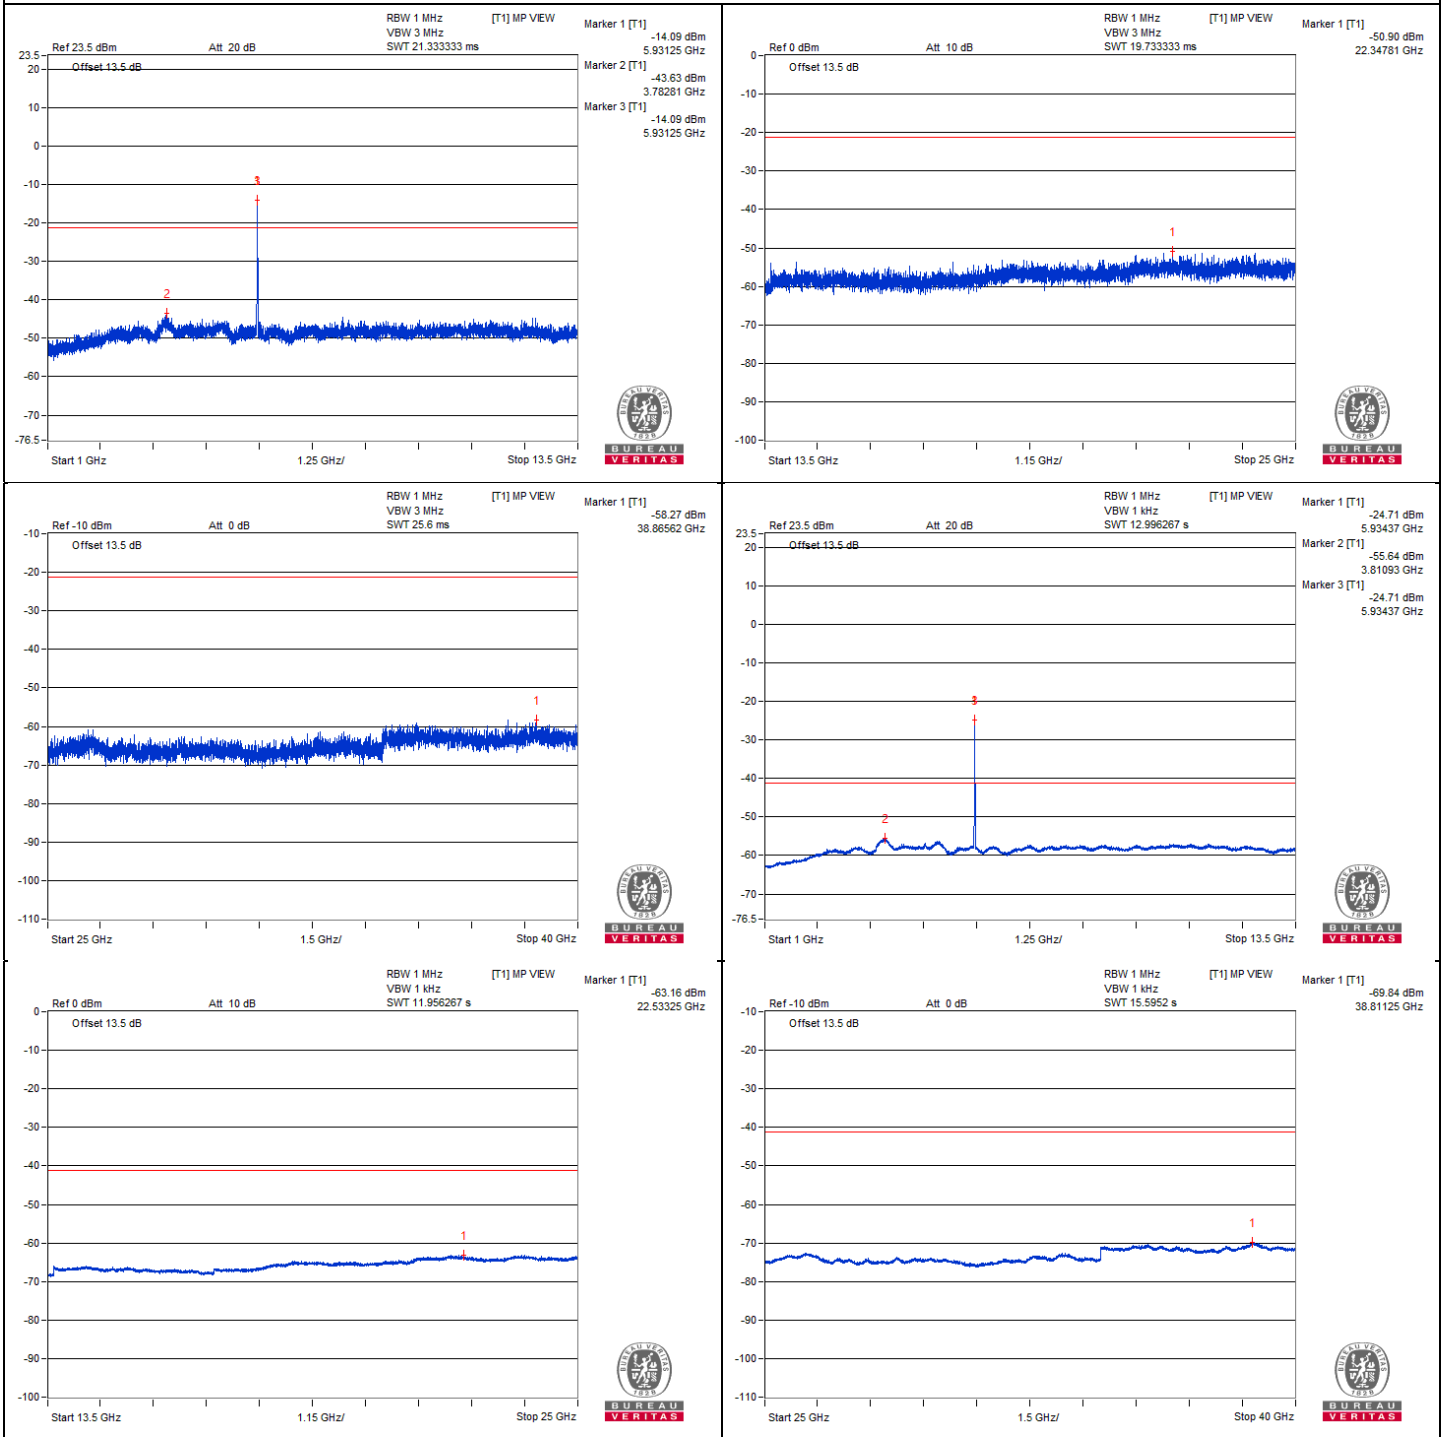


**Bandedge table**

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #5925           | 78.83 PK                | 88.2           | -9.37       | -26.09          | -29.9  | 8.15                   | -16.43           |
| 2   | #5925           | 67.8 AV                 | 68.2           | -0.4        | -38.59          | -38.65 | 8.15                   | -27.46           |


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

**Chain 0**

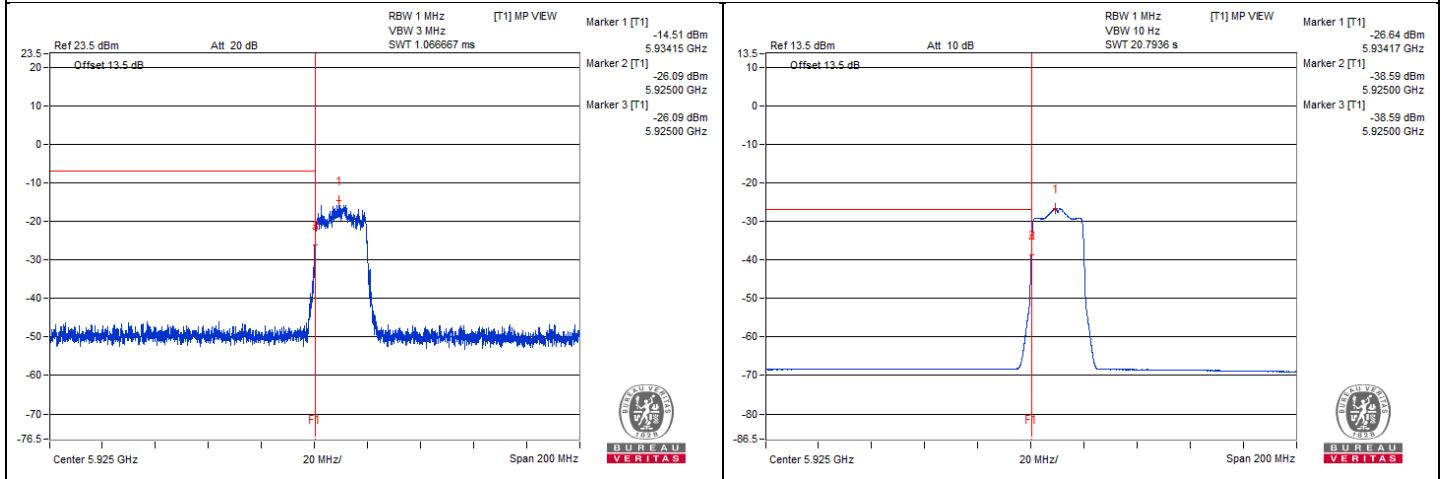

**Chain 1**

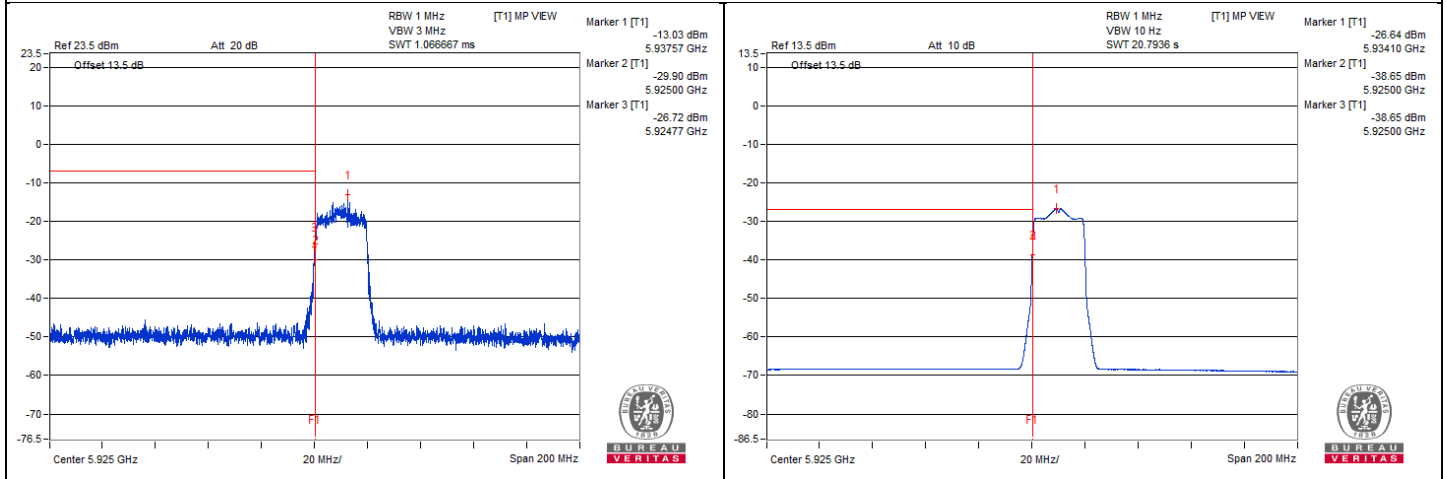

### 802.11be (EHT20) - Channel 1

#### Conducted spurious emission table







| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 11904.68        | 59.05 PK                | 74             | -14.95      | -47.71          | -47.09 | 8.17                   | -36.21           |
| 2   | 11903.12        | 48.5 AV                 | 54             | -5.5        | -57.92          | -57.96 | 8.17                   | -46.76           |
| 3   | 17872.87        | 51.41 PK                | 74             | -22.59      | -54.79          | -55.29 | 8.17                   | -43.85           |
| 4   | 17855.62        | 39.53 AV                | 54             | -14.47      | -66.74          | -67.09 | 8.17                   | -55.73           |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.




### Chain 0

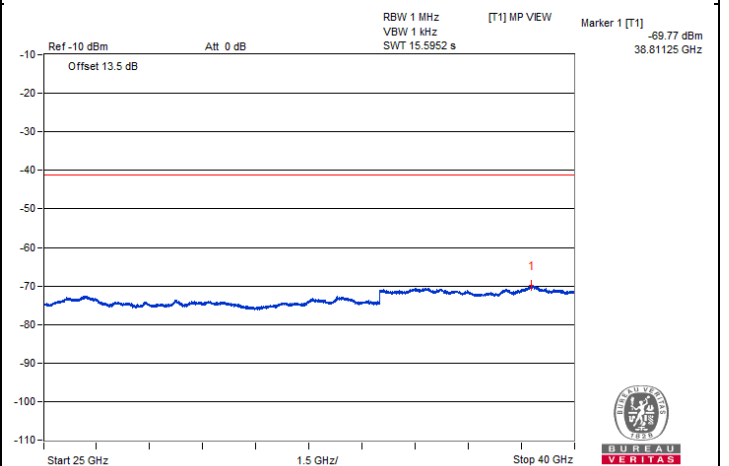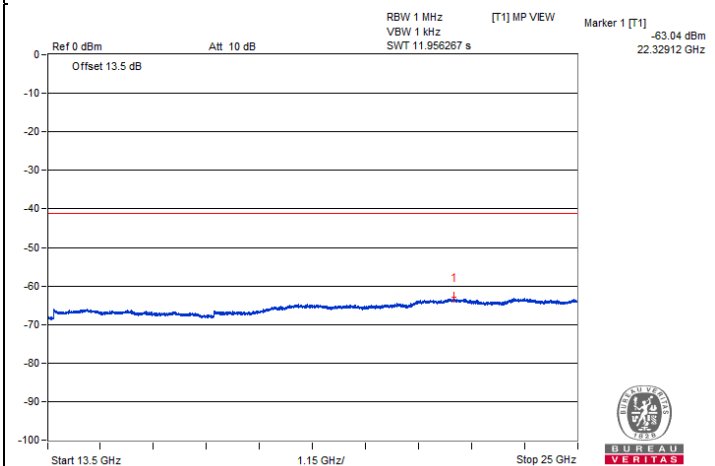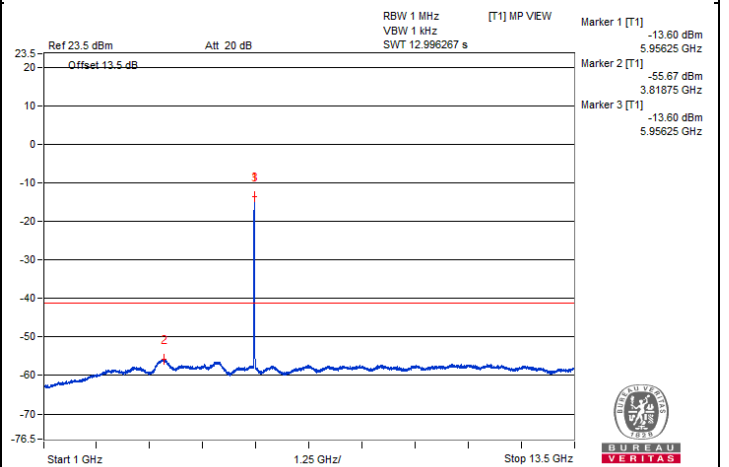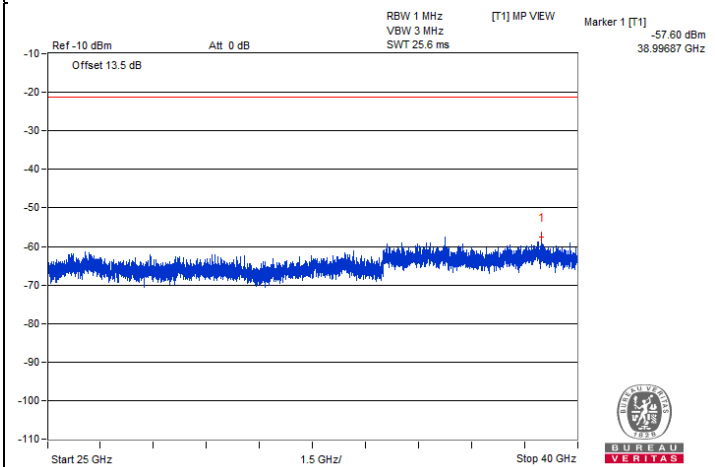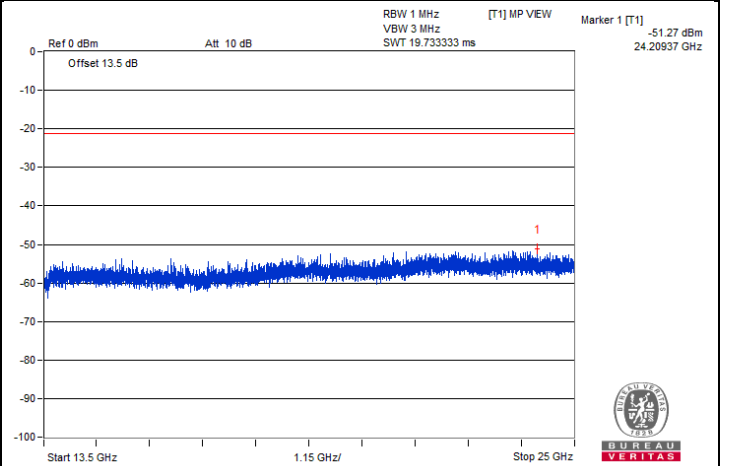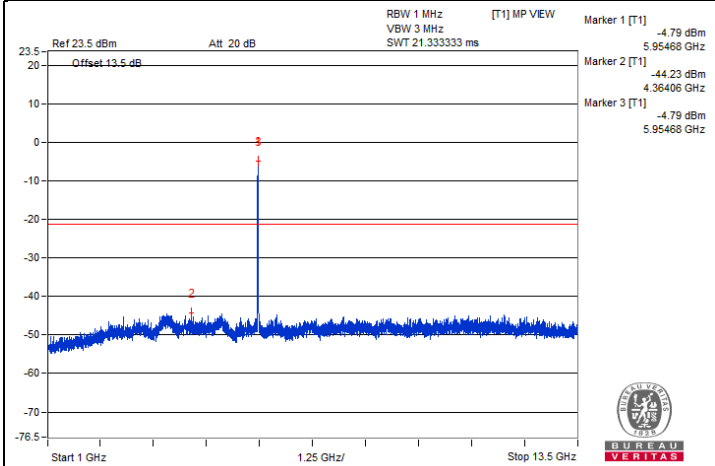



### Chain 1

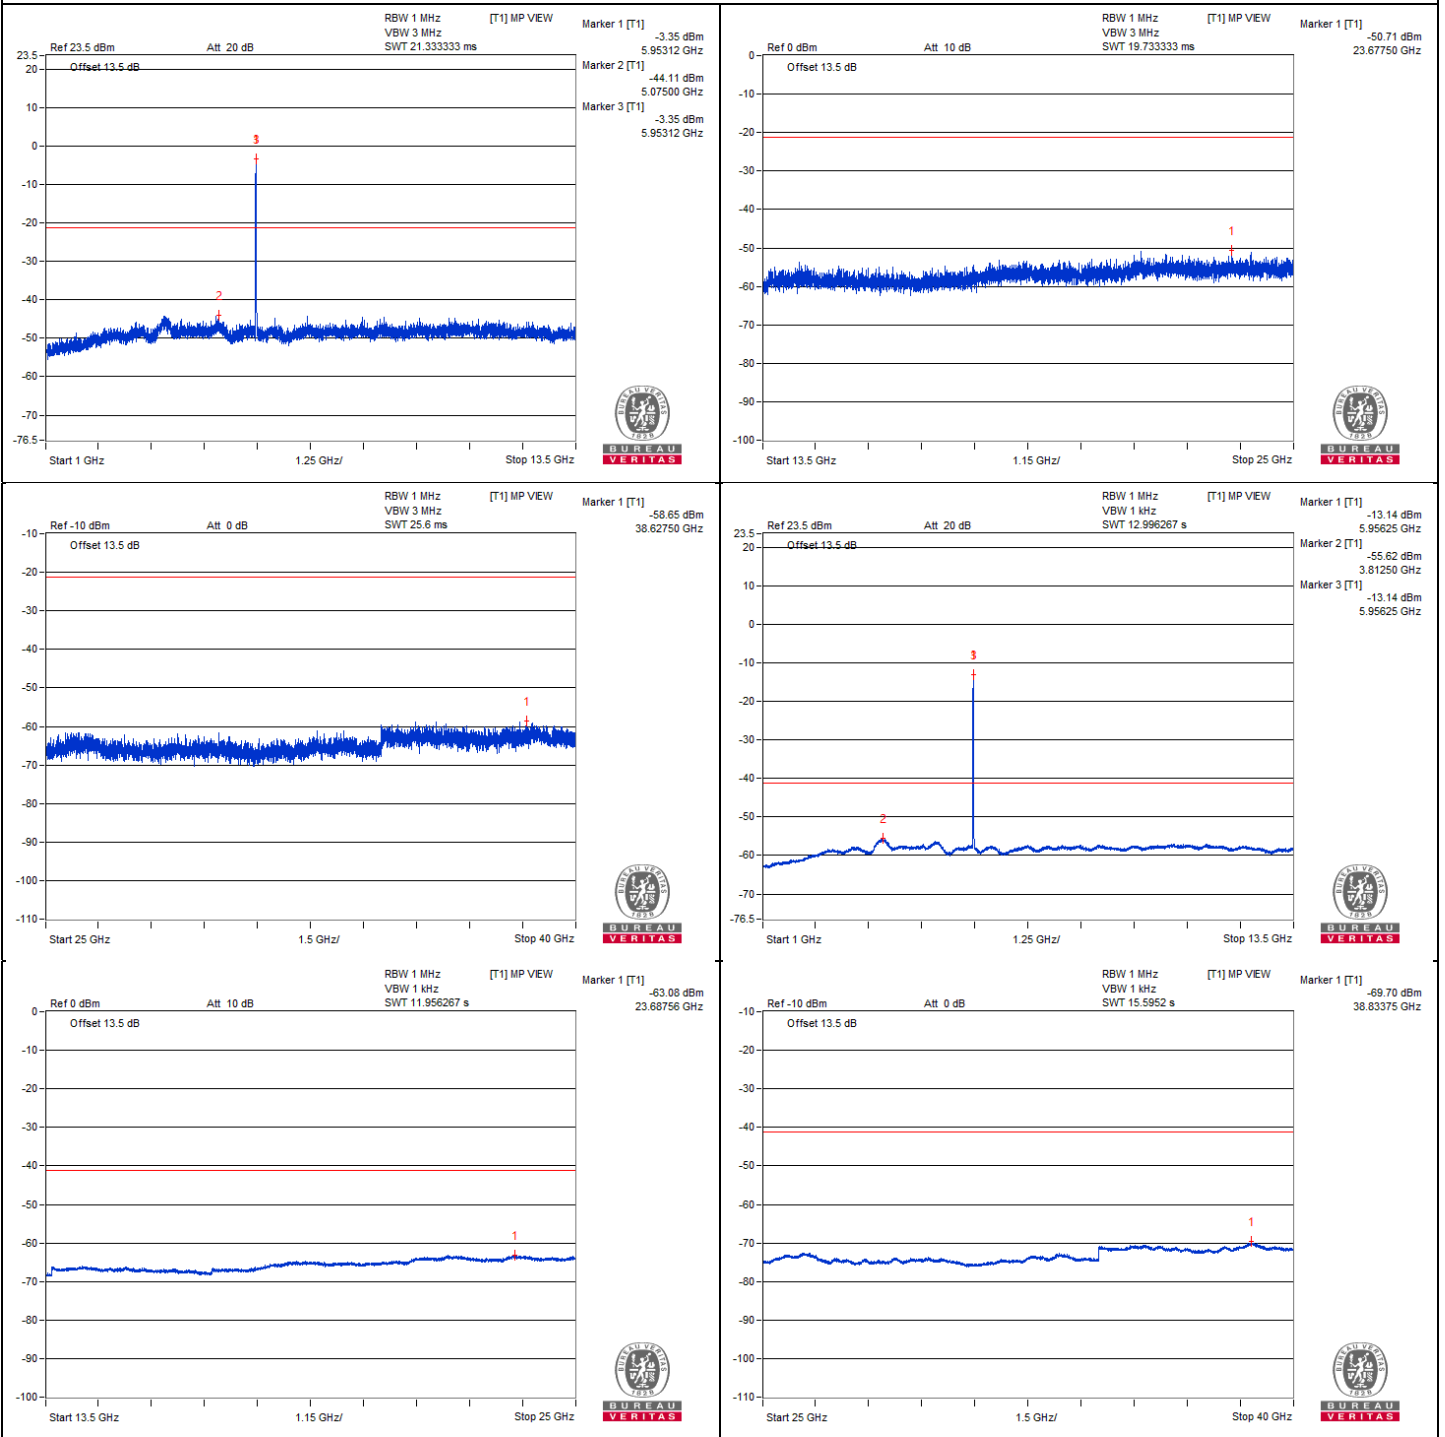


**Bandedge table**

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #5922.62        | 59.91 PK                | 88.2           | -28.29      | -47.44          | -45.74 | 8.15                   | -35.35           |
| 2   | #5923.07        | 38.85 AV                | 68.2           | -29.35      | -67.7           | -67.44 | 8.15                   | -56.41           |


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

**Chain 0**

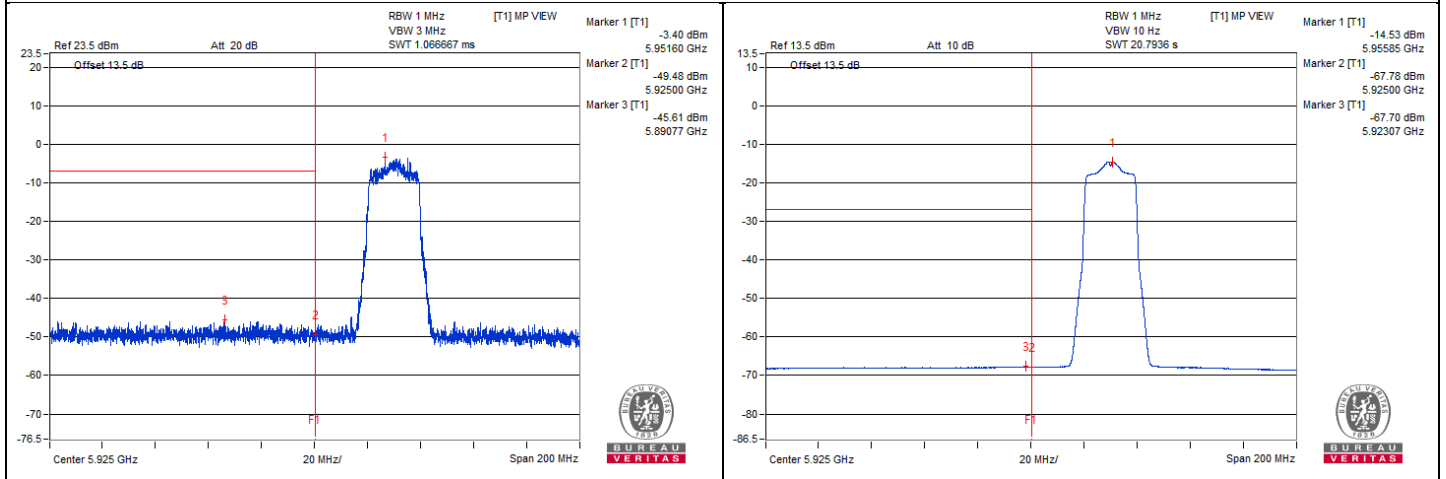

**Chain 1**

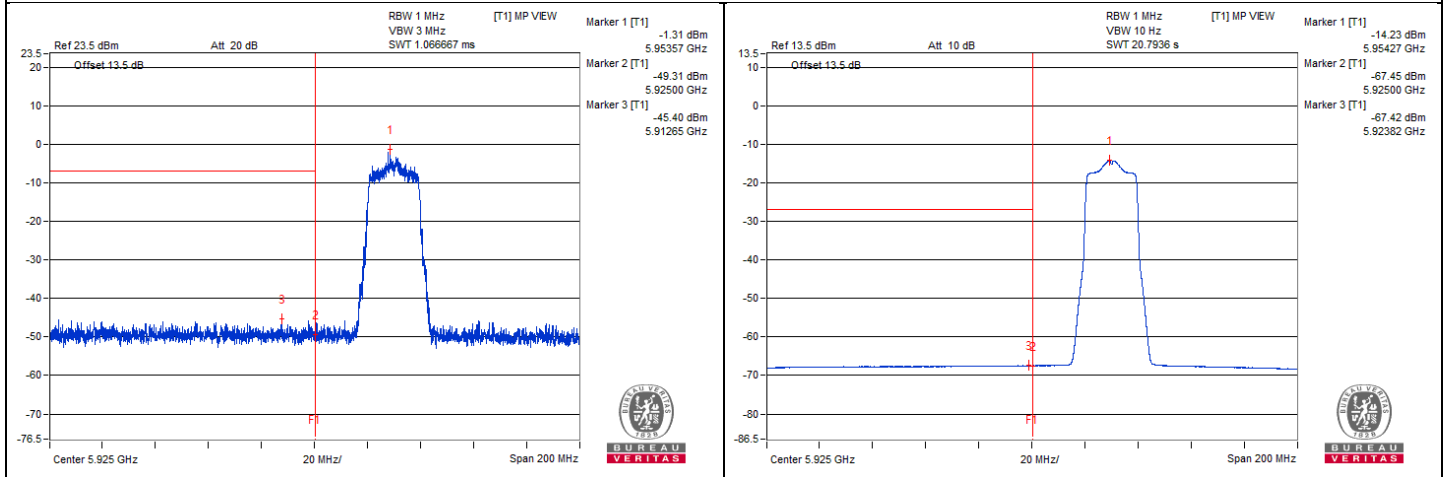



### 802.11be (EHT20) - Channel 45

#### Conducted spurious emission table







| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 12354.68        | 60.4 PK                 | 74             | -13.6       | -44.19          | -49.33 | 8.17                   | -34.86           |
| 2   | 12342.18        | 48.81 AV                | 54             | -5.19       | -57.39          | -57.89 | 8.17                   | -46.45           |
| 3   | 18519.75        | 50.51 PK                | 74             | -23.49      | -56.66          | -55.31 | 8.17                   | -44.75           |
| 4   | 18534.12        | 40.88 AV                | 54             | -13.12      | -65.53          | -65.6  | 8.17                   | -54.38           |

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.



### Chain 0

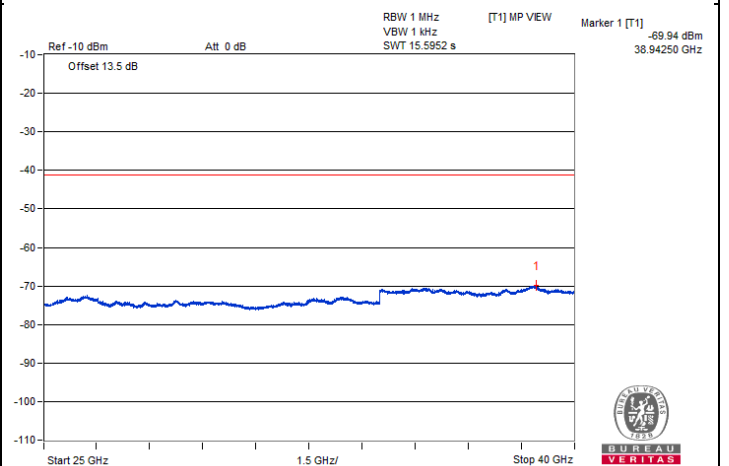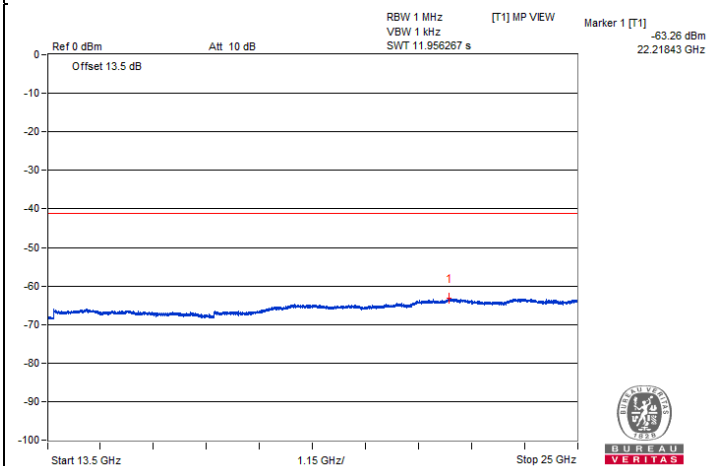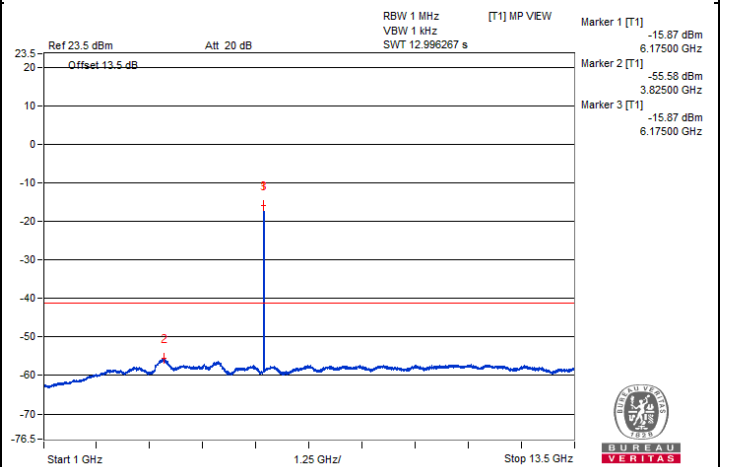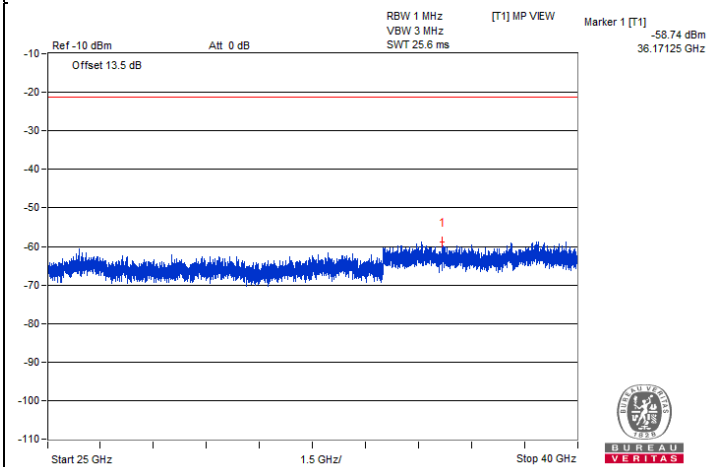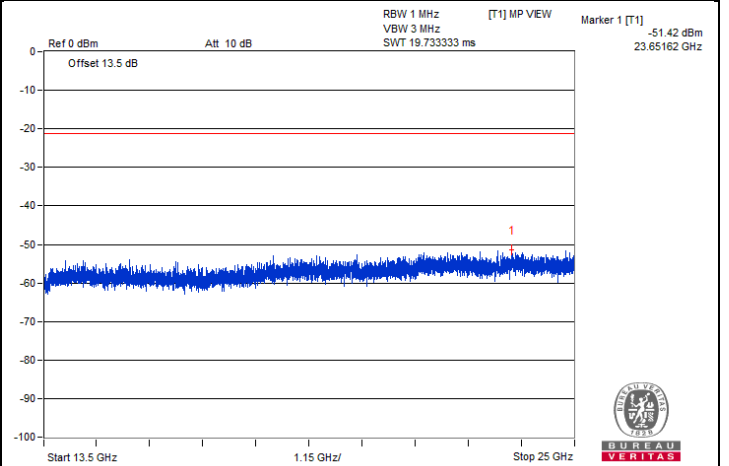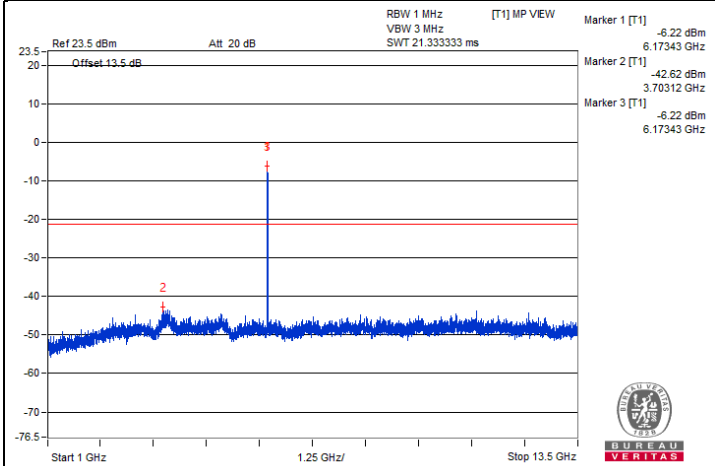

### Chain 1

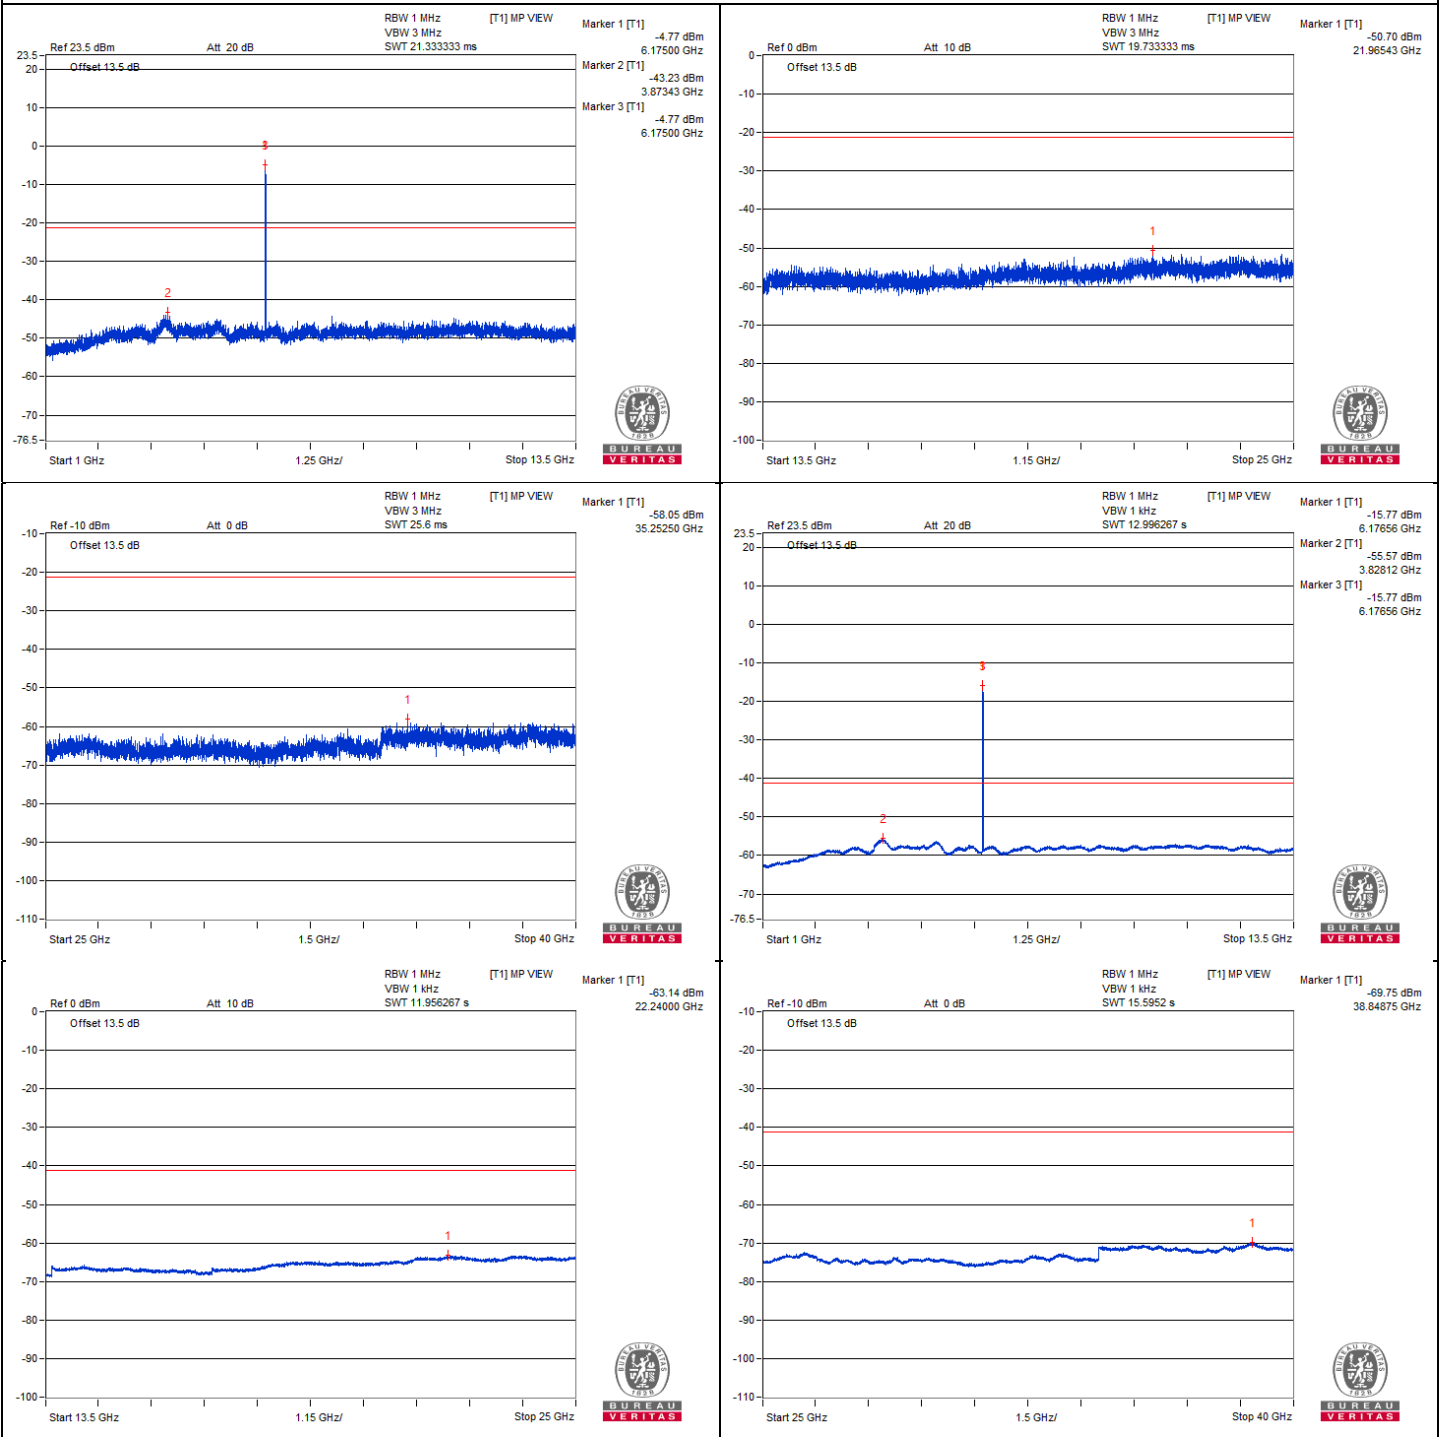

### 802.11be (EHT20) - Channel 93

#### Conducted spurious emission table


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #12823.43       | 58.09 PK                | 88.2           | -30.11      | -48.05          | -48.68 | 8.17                   | -37.17           |
| 2   | #12831.25       | 47.87 AV                | 68.2           | -20.33      | -58.65          | -58.5  | 8.17                   | -47.39           |
| 3   | 19248.56        | 50.7 PK                 | 74             | -23.3       | -55.94          | -55.54 | 8.17                   | -44.56           |
| 4   | 19237.06        | 41.34 AV                | 54             | -12.66      | -64.95          | -65.26 | 8.17                   | -53.92           |

#### Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




### Chain 0

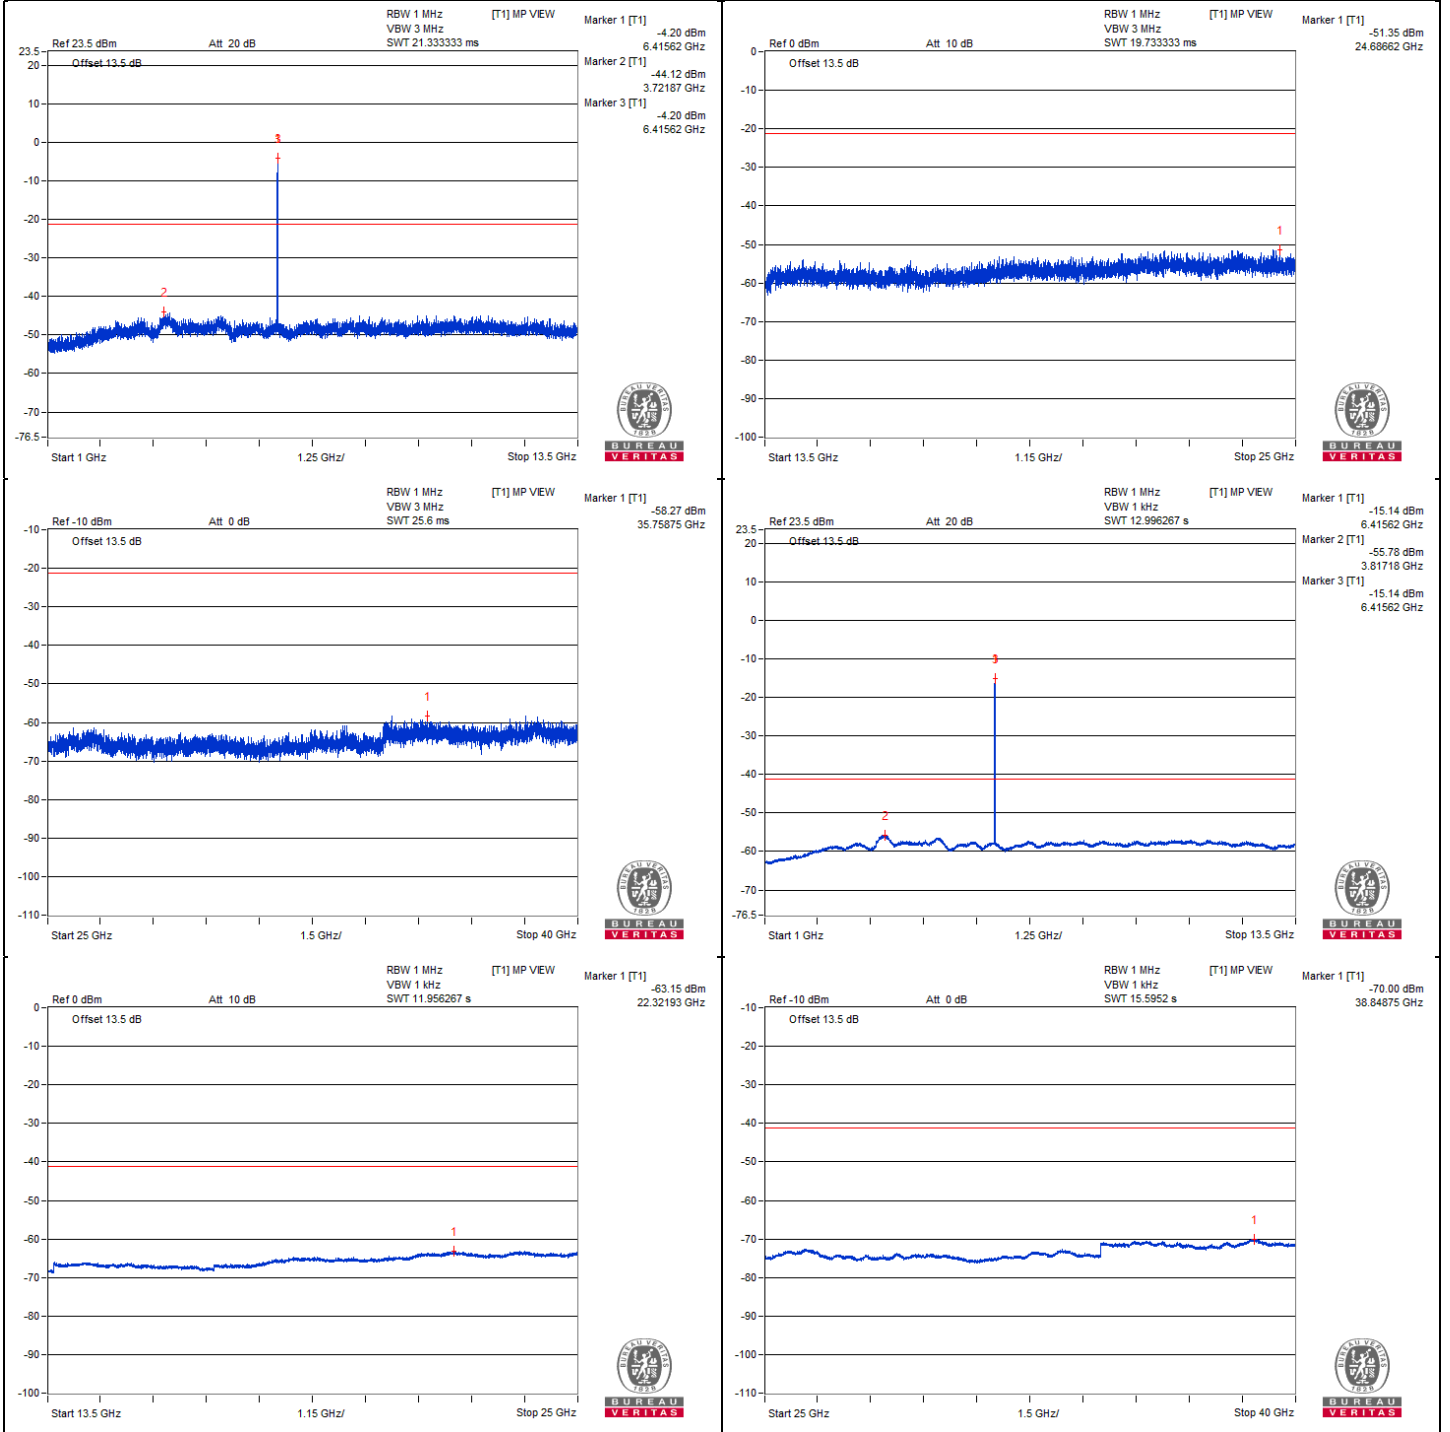



### Chain 1

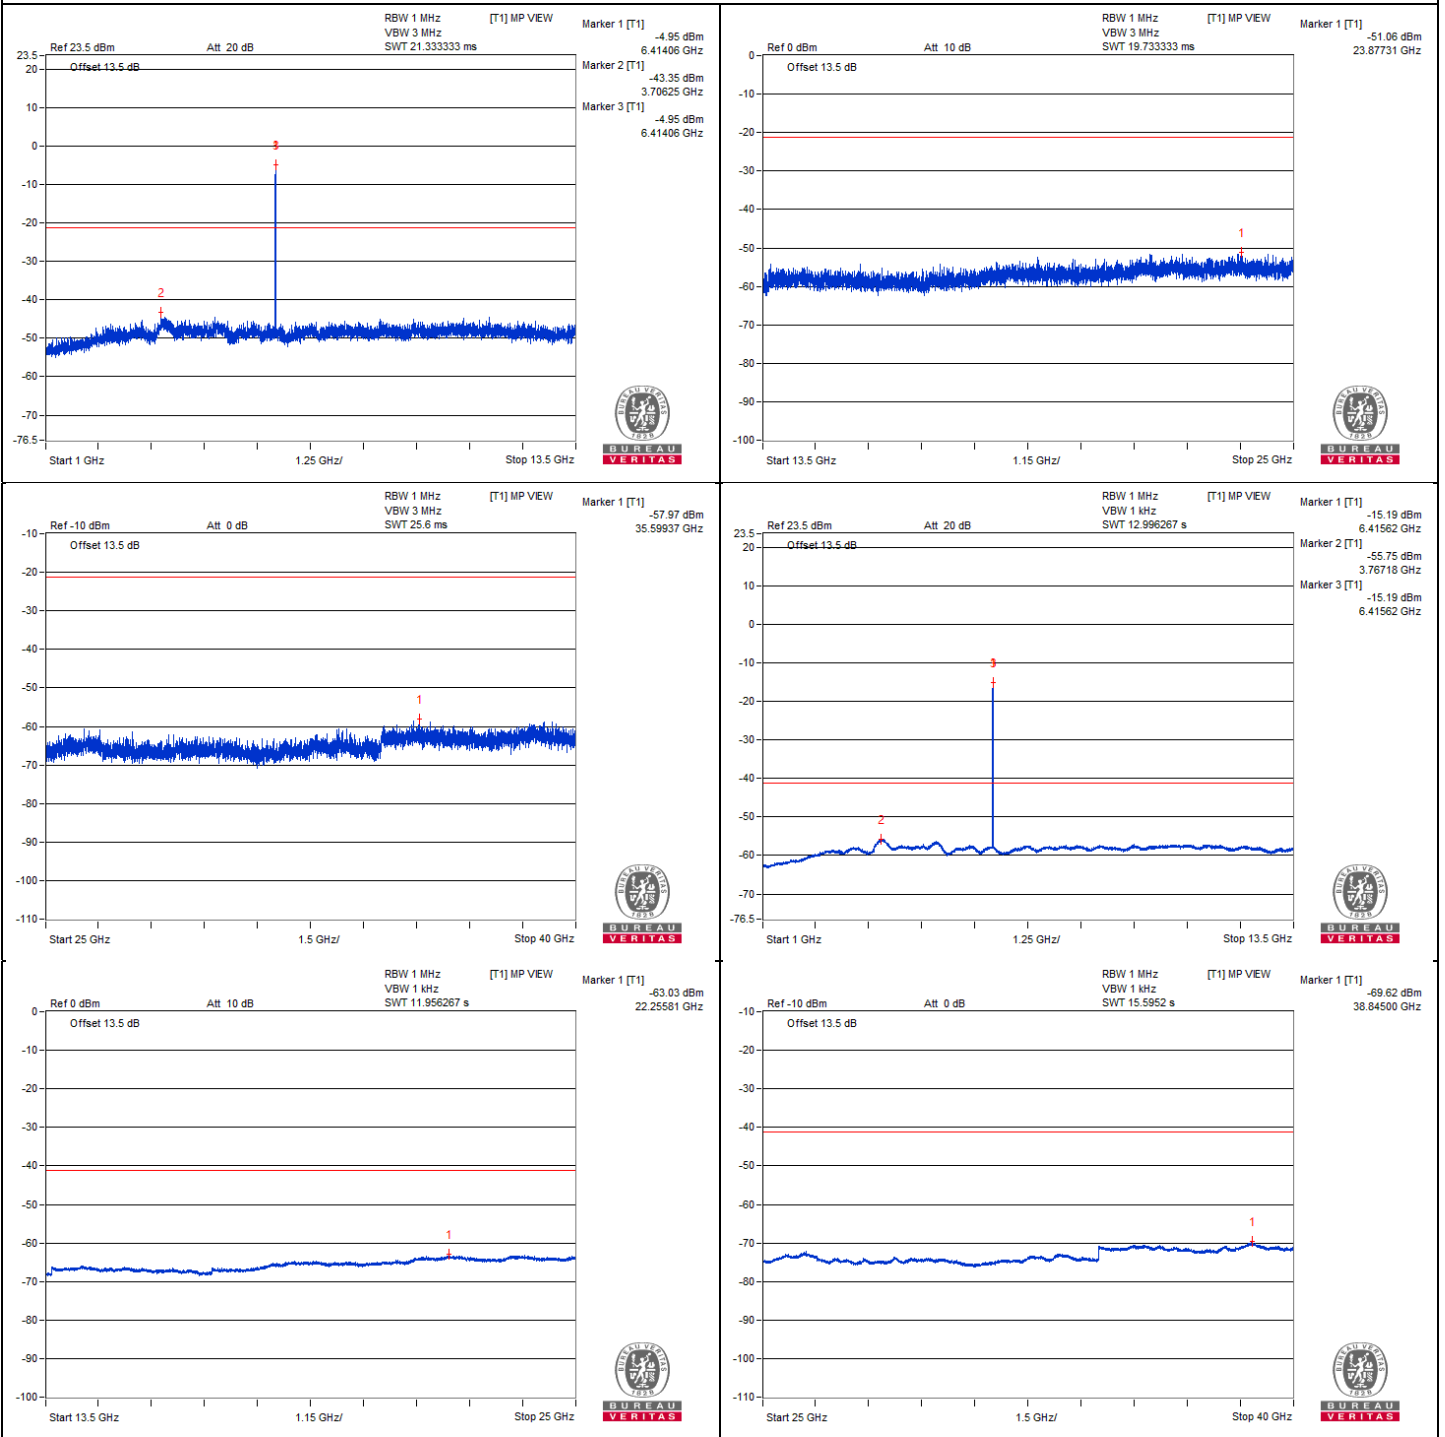

**802.11be (EHT20) - Channel 97**
**Conducted spurious emission table**


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #12873.43       | 57.96 PK                | 88.2           | -30.24      | -48.43          | -48.53 | 8.17                   | -37.30           |
| 2   | #12860.93       | 47.84 AV                | 68.2           | -20.36      | -58.7           | -58.5  | 8.17                   | -47.42           |
| 3   | 19303.18        | 50.42 PK                | 74             | -23.58      | -55.63          | -56.44 | 8.17                   | -44.84           |
| 4   | 19297.43        | 41.25 AV                | 54             | -12.75      | -65.36          | -65.02 | 8.17                   | -54.01           |

**Remarks:**

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




### Chain 0

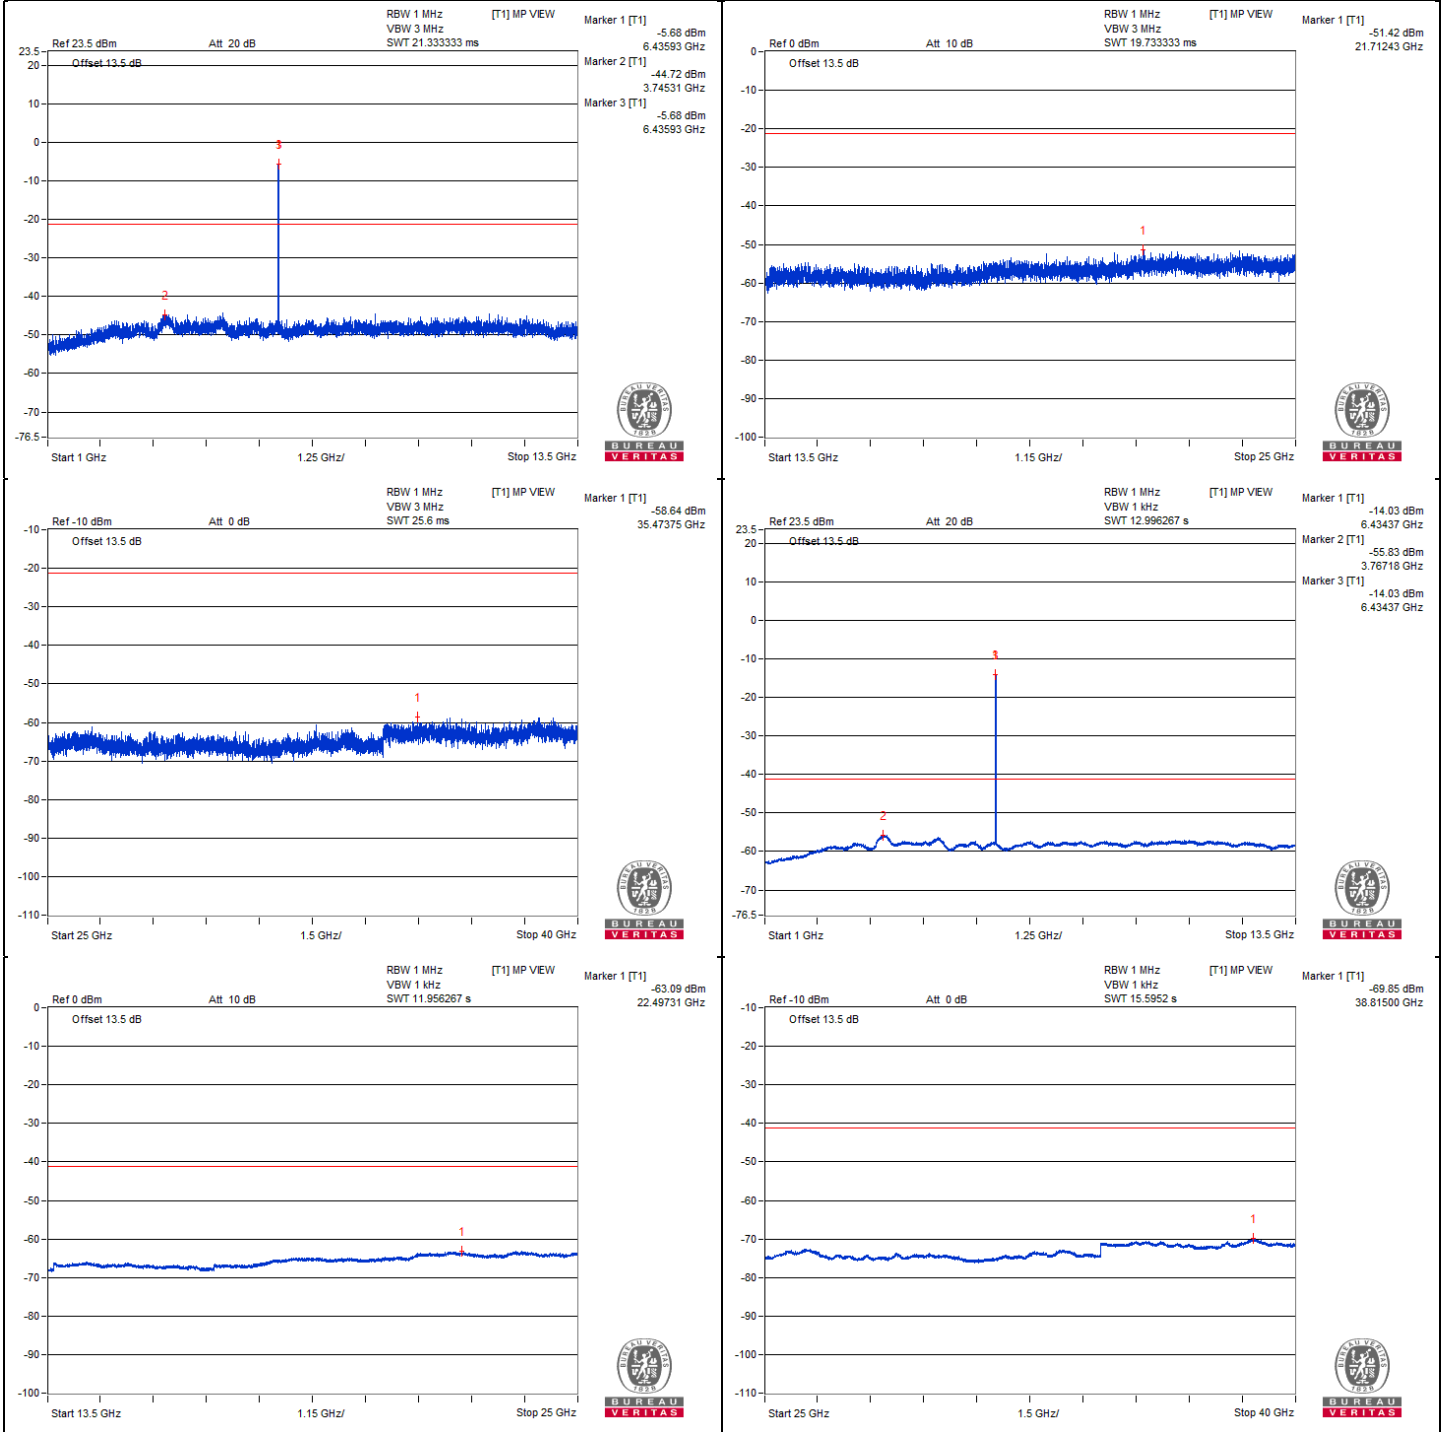





### Chain 1

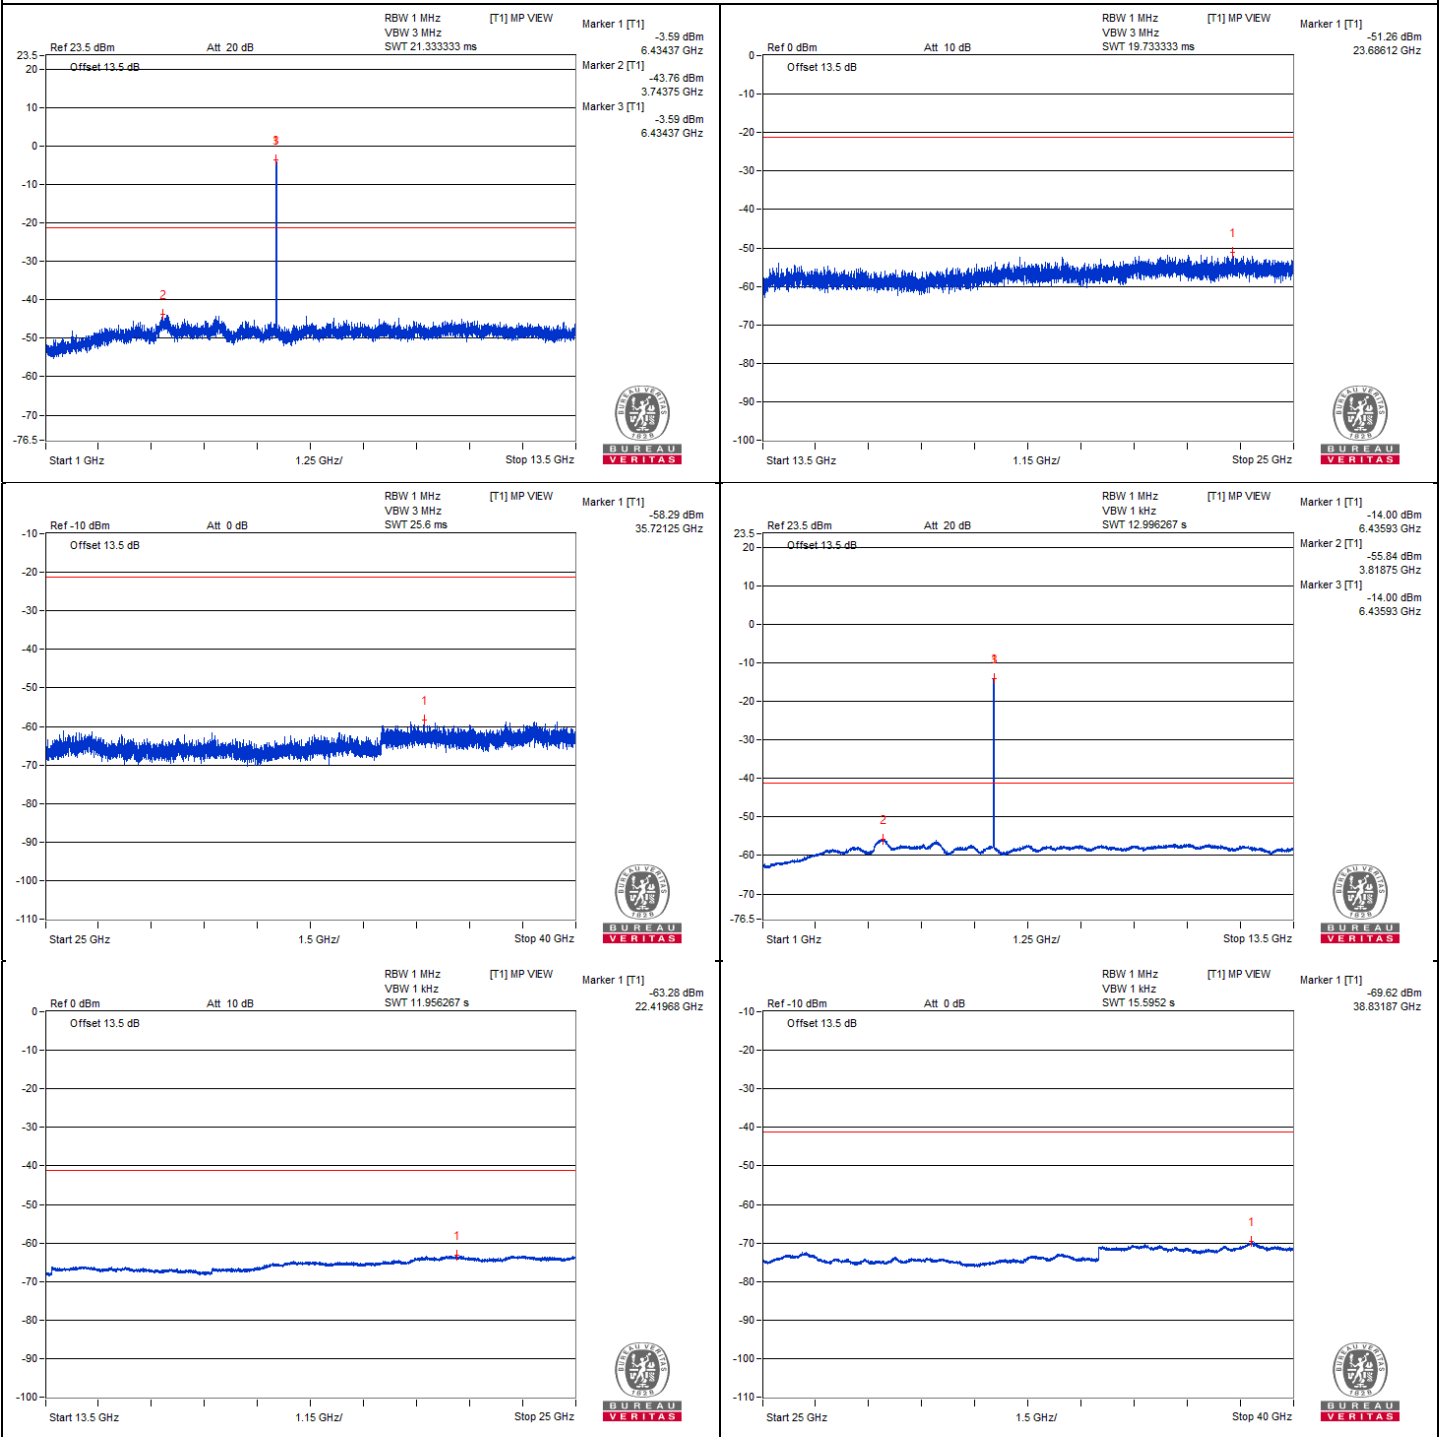

### 802.11be (EHT20) - Channel 105

#### Conducted spurious emission table


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #12953.12       | 58.12 PK                | 88.2           | -30.08      | -48.89          | -47.82 | 8.17                   | -37.14           |
| 2   | #12946.87       | 47.5 AV                 | 68.2           | -20.7       | -58.69          | -59.21 | 8.17                   | -47.76           |
| 3   | 19431.12        | 51.56 PK                | 74             | -22.44      | -55.9           | -54.05 | 8.17                   | -43.70           |
| 4   | 19429.68        | 41.28 AV                | 54             | -12.72      | -65.12          | -65.21 | 8.17                   | -53.98           |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




### Chain 0

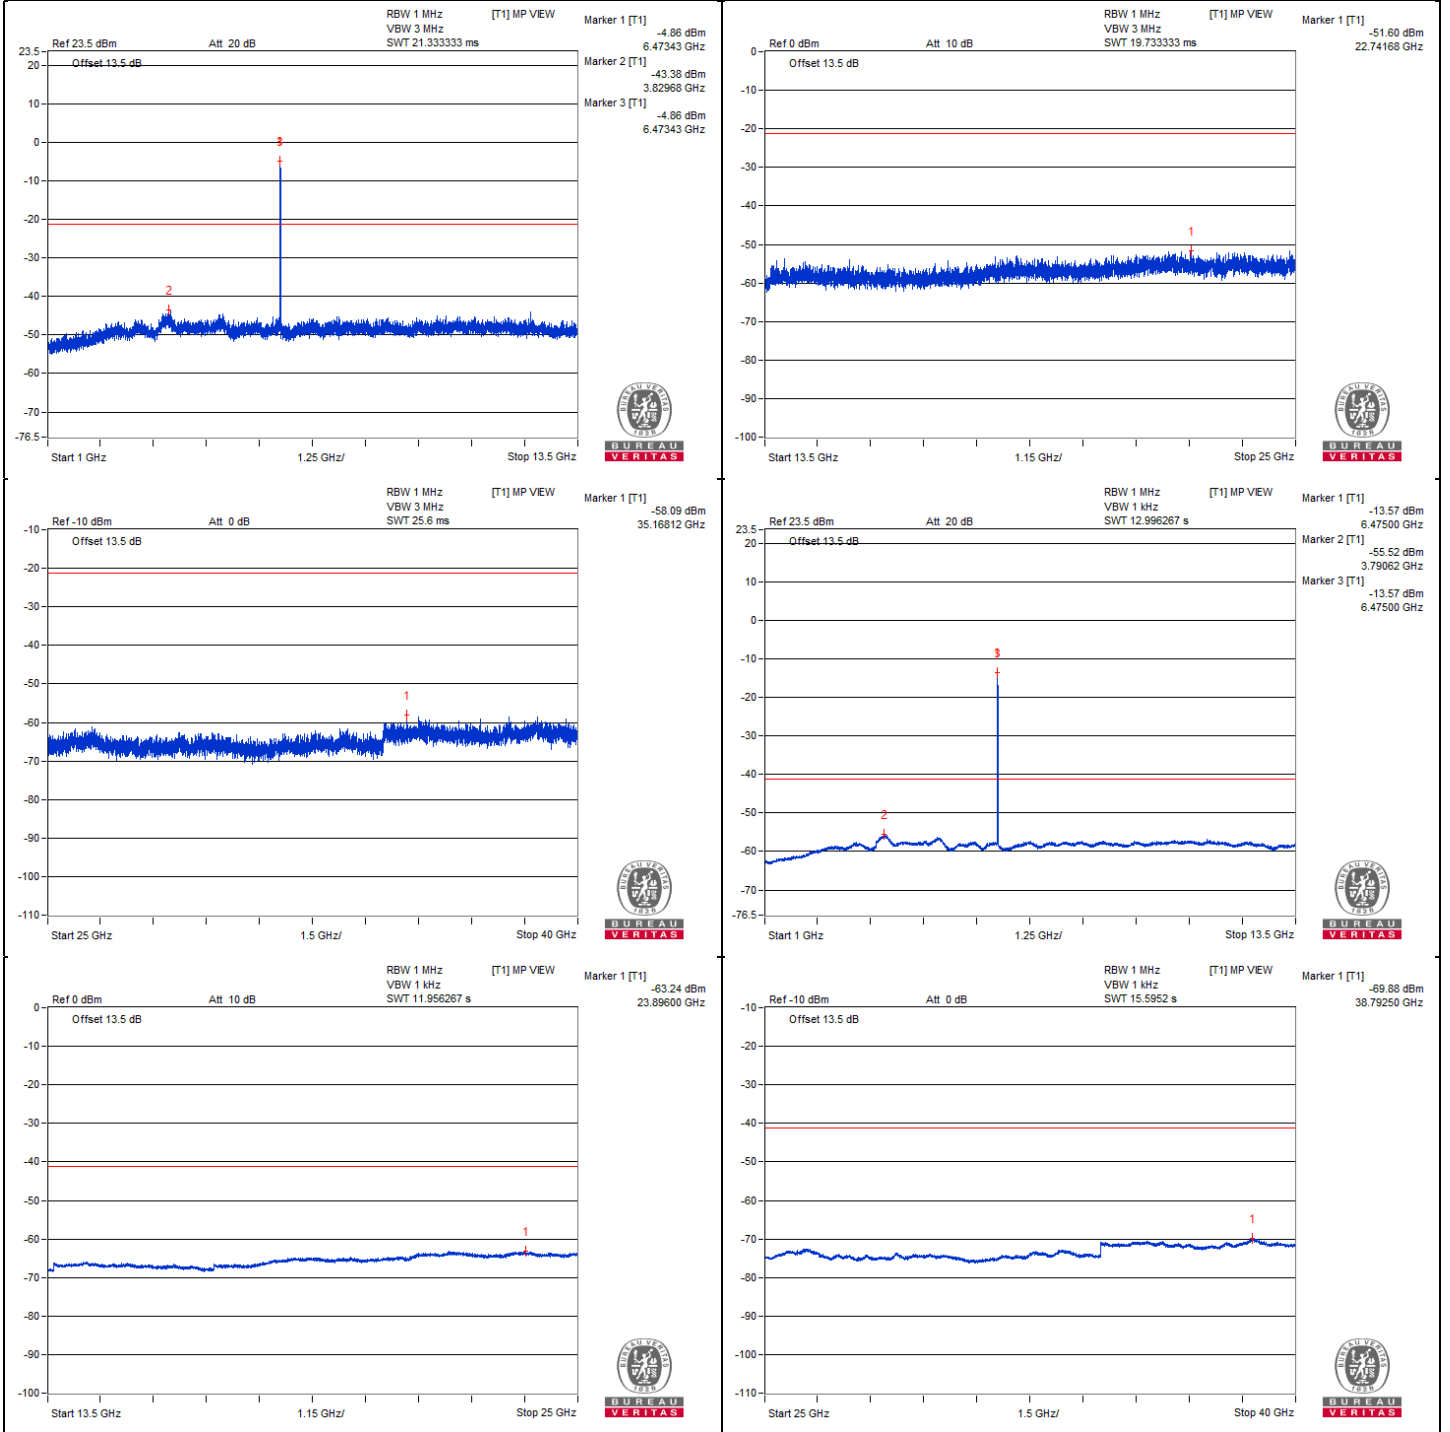



### Chain 1

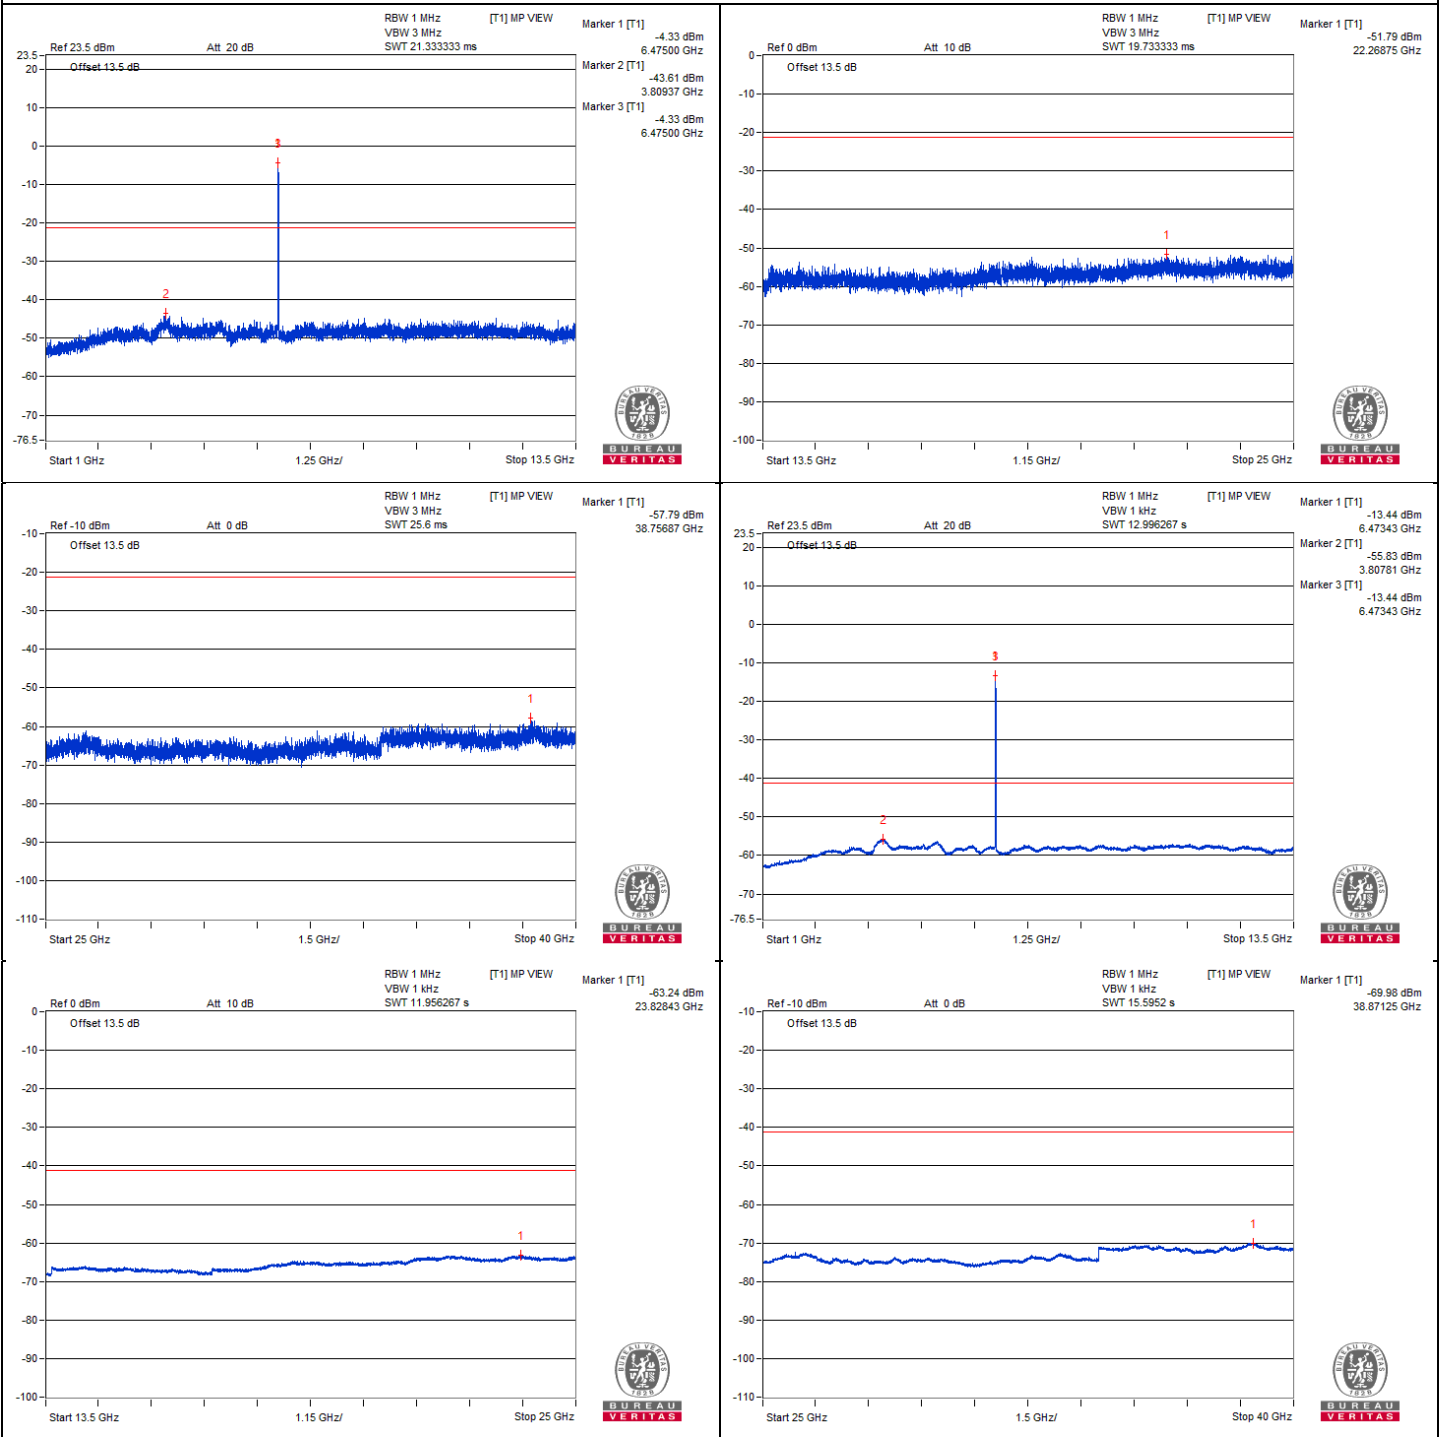

### 802.11be (EHT20) - Channel 113

#### Conducted spurious emission table


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #13025          | 58.43 PK                | 88.2           | -29.77      | -47.48          | -48.62 | 8.17                   | -36.83           |
| 2   | #13037.5        | 47.43 AV                | 68.2           | -20.77      | -59.4           | -58.66 | 8.17                   | -47.83           |
| 3   | 19549           | 50.73 PK                | 74             | -23.27      | -57.21          | -54.59 | 8.17                   | -44.53           |
| 4   | 19543.25        | 40.97 AV                | 54             | -13.03      | -65.55          | -65.39 | 8.17                   | -54.29           |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




### Chain 0

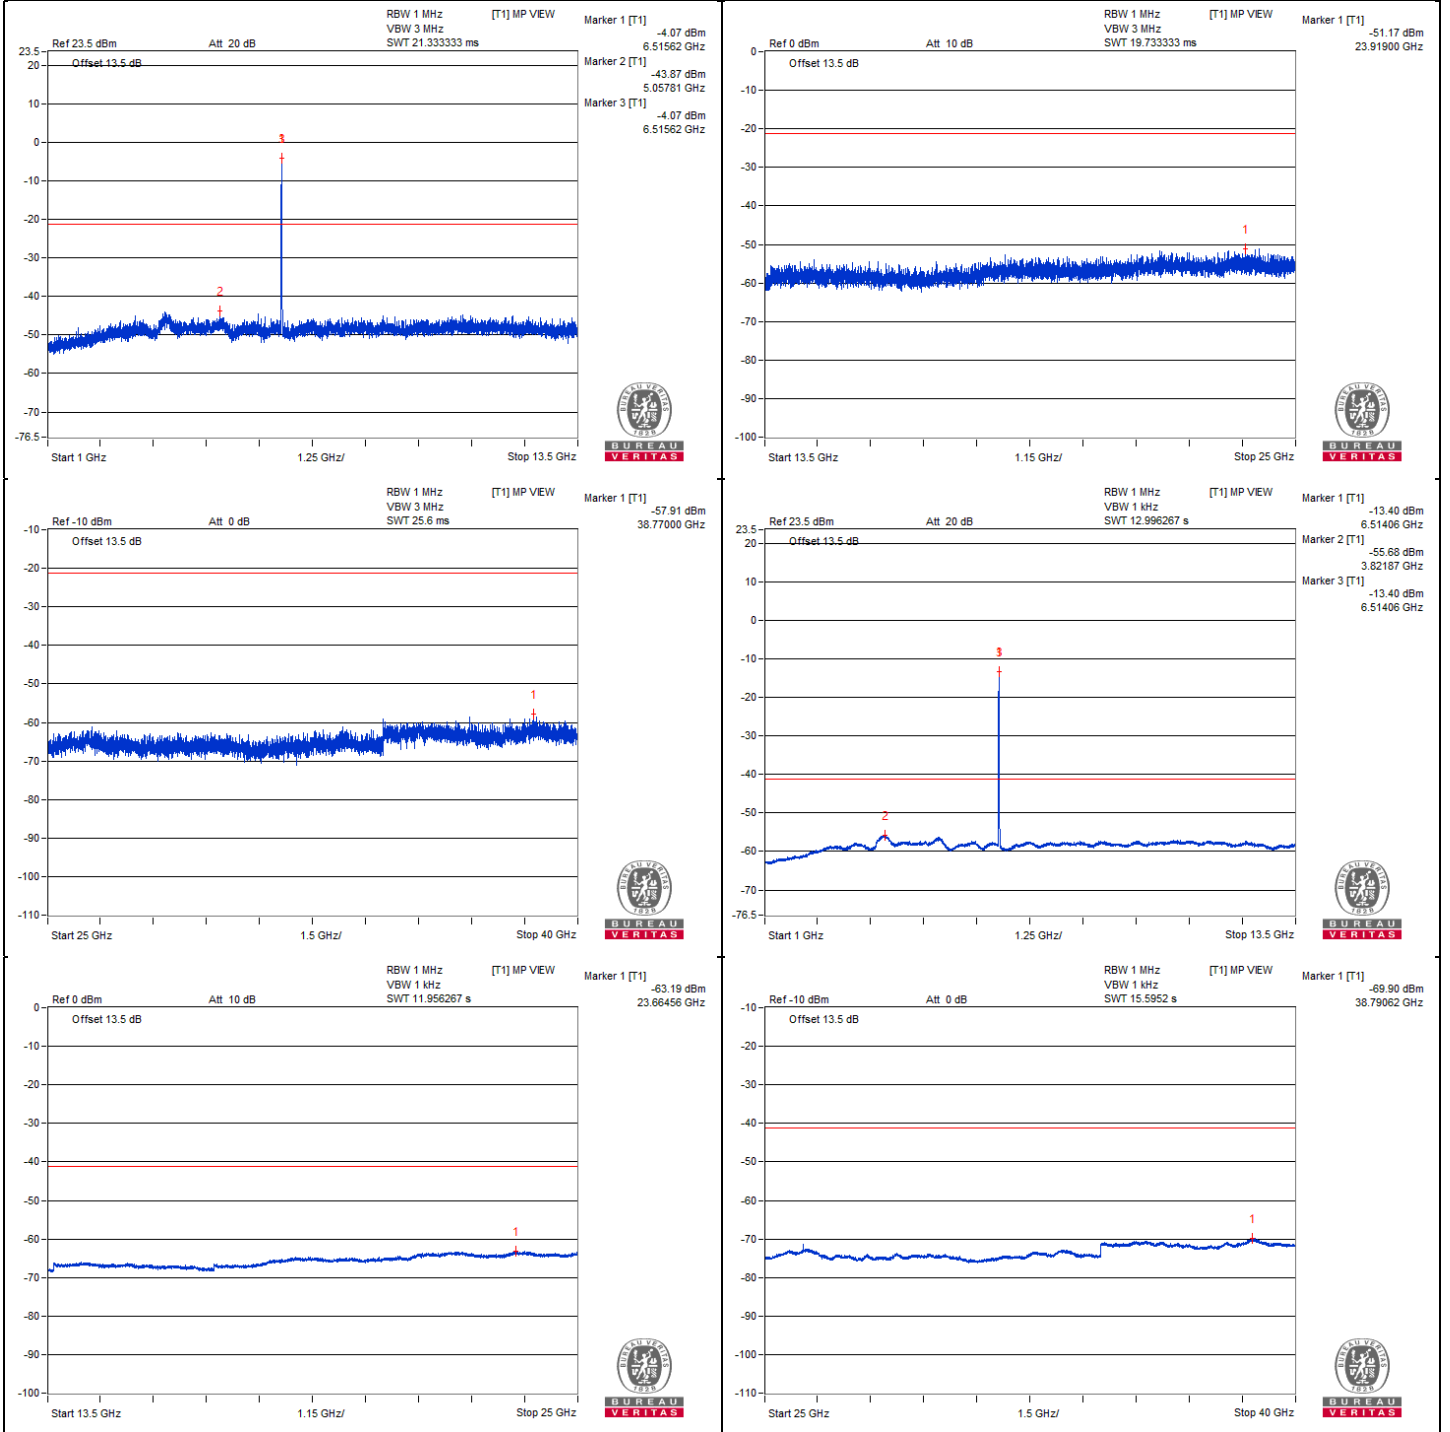



### Chain 1

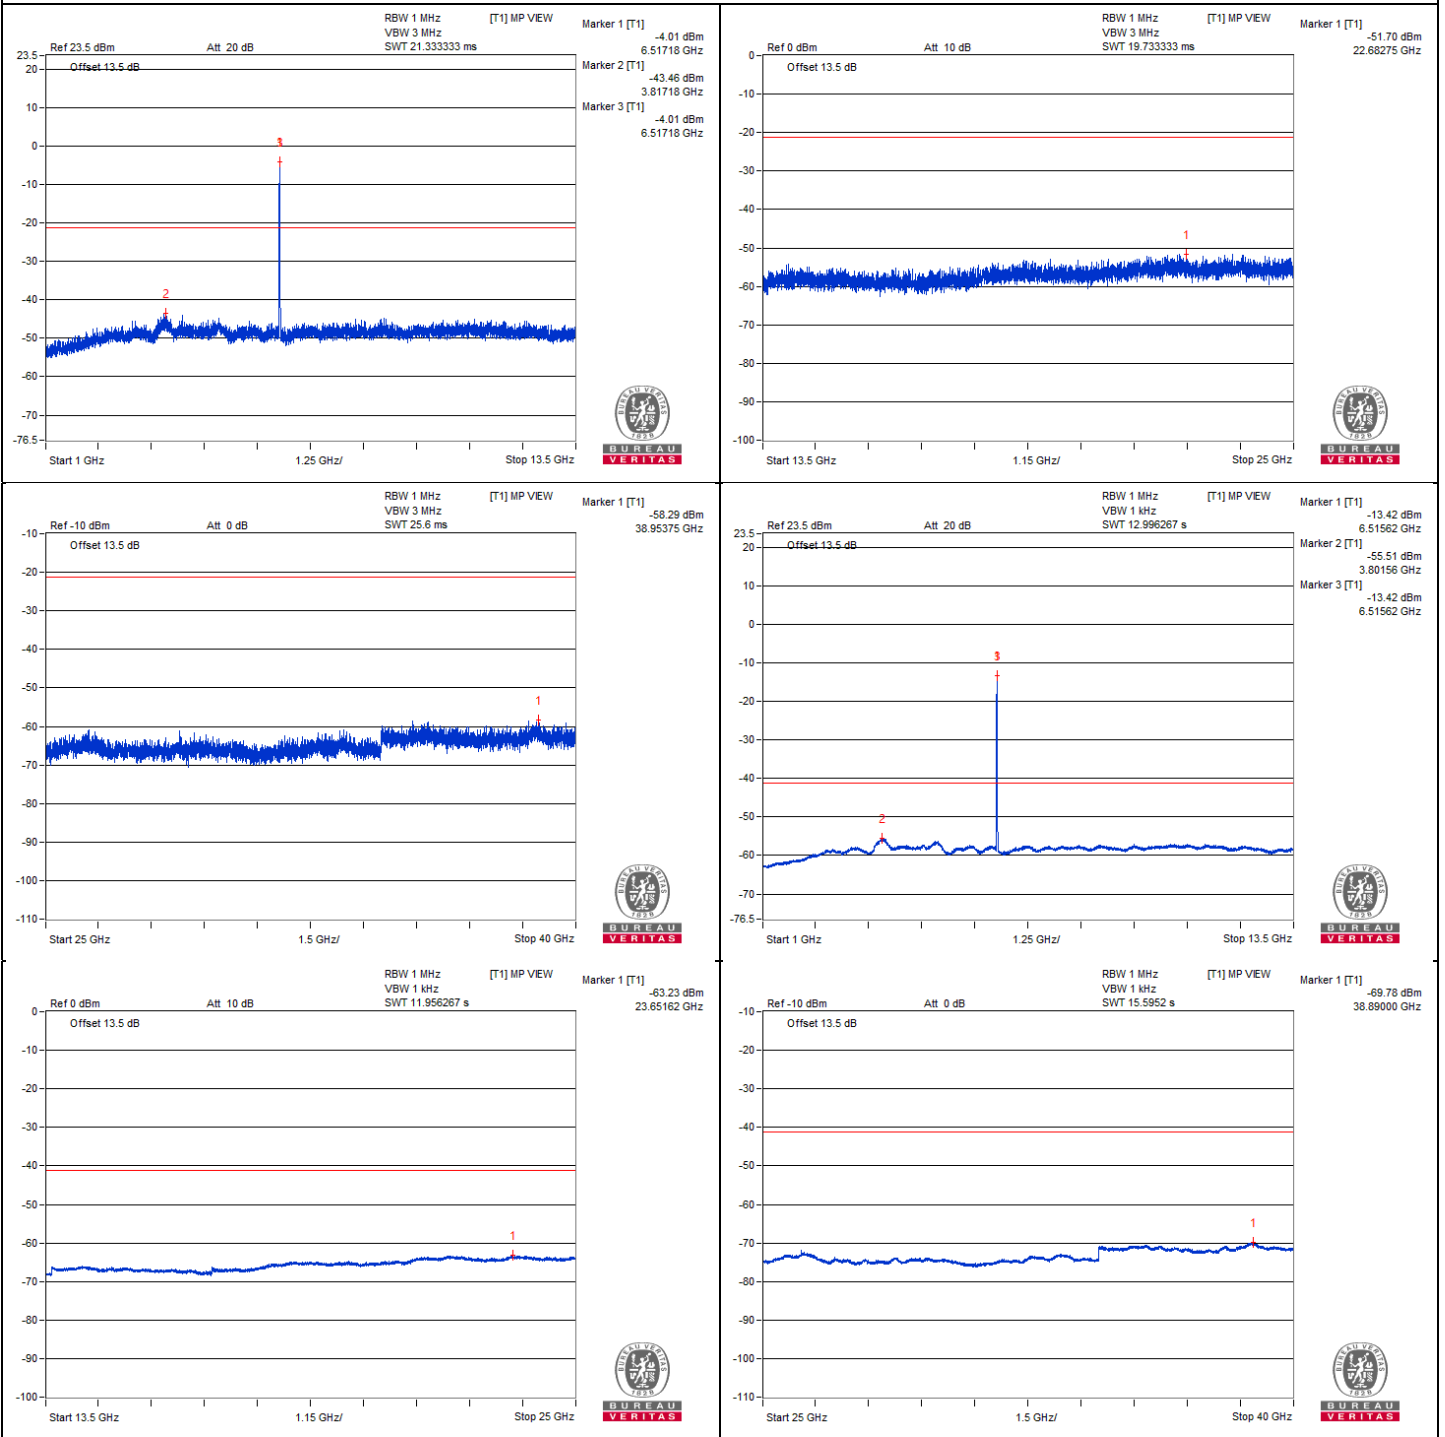

### 802.11be (EHT20) - Channel 117

#### Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #13067.18       | 58.54 PK                | 88.2           | -29.66      | -49.21          | -46.89 | 8.17                   | -36.72           |
| 2   | #13079.68       | 47.58 AV                | 68.2           | -20.62      | -58.87          | -58.86 | 8.17                   | -47.68           |
| 3   | 19607.93        | 50.77 PK                | 74             | -23.23      | -55.36          | -56.01 | 8.17                   | -44.49           |
| 4   | 19612.25        | 40.82 AV                | 54             | -13.18      | -65.55          | -65.69 | 8.17                   | -54.44           |







#### Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.






### Chain 0

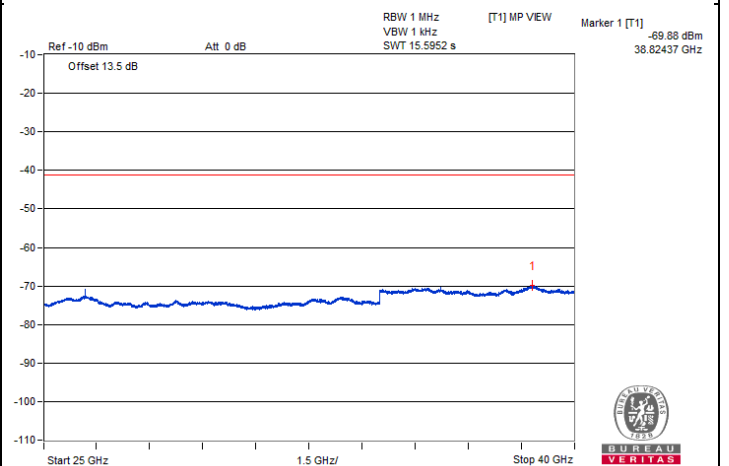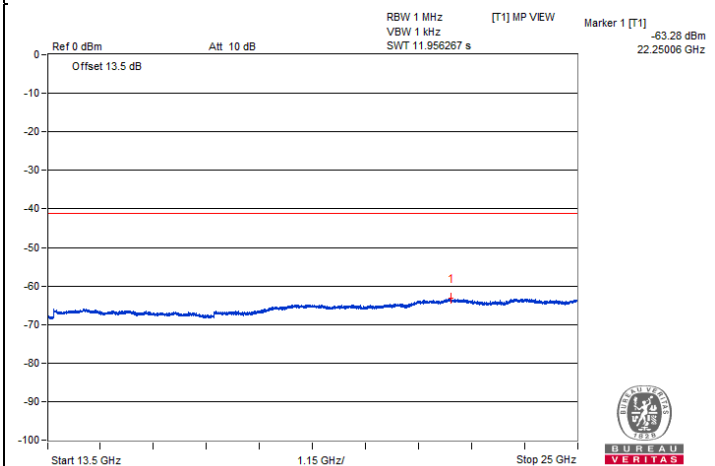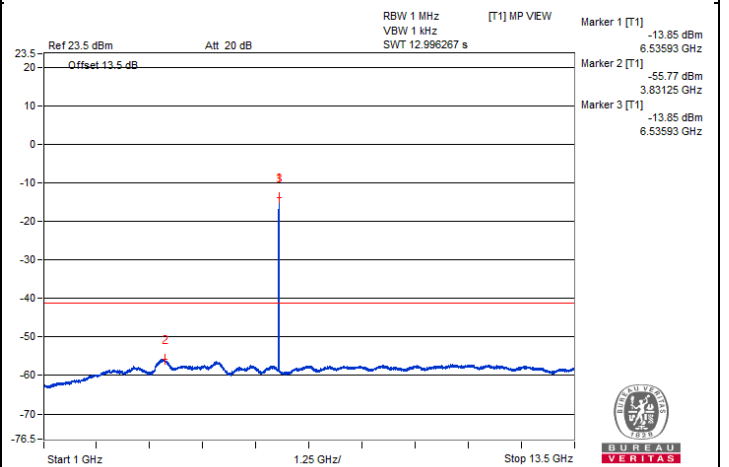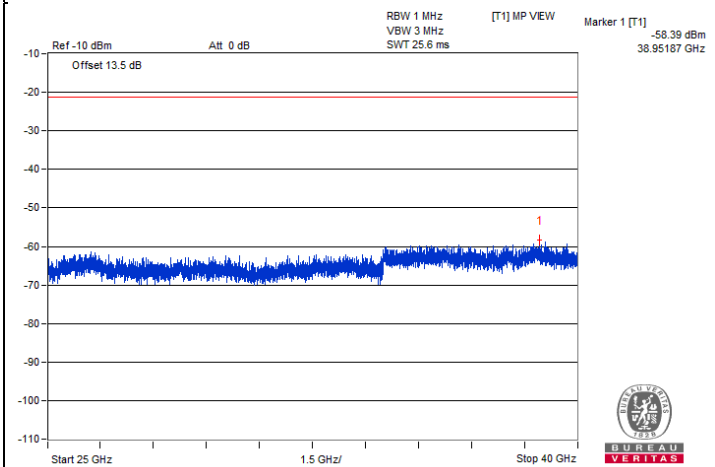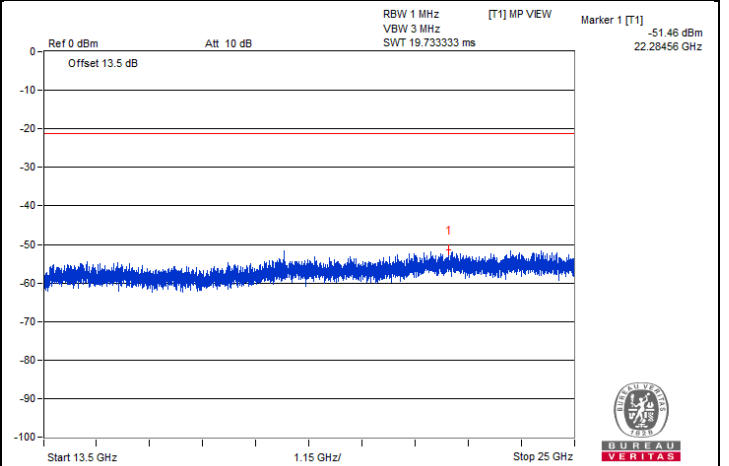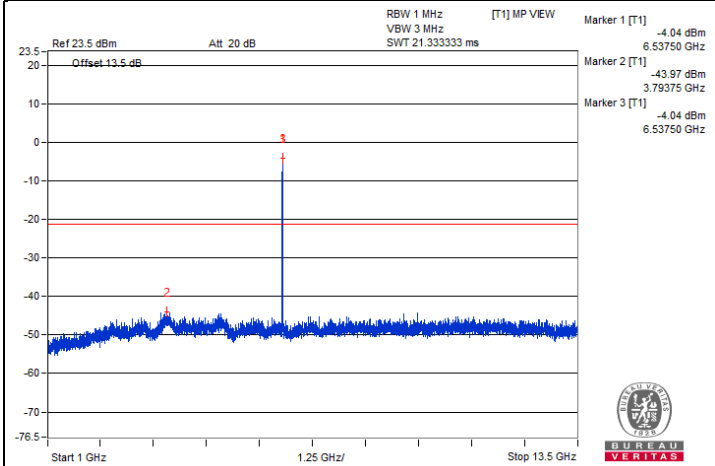



### Chain 1

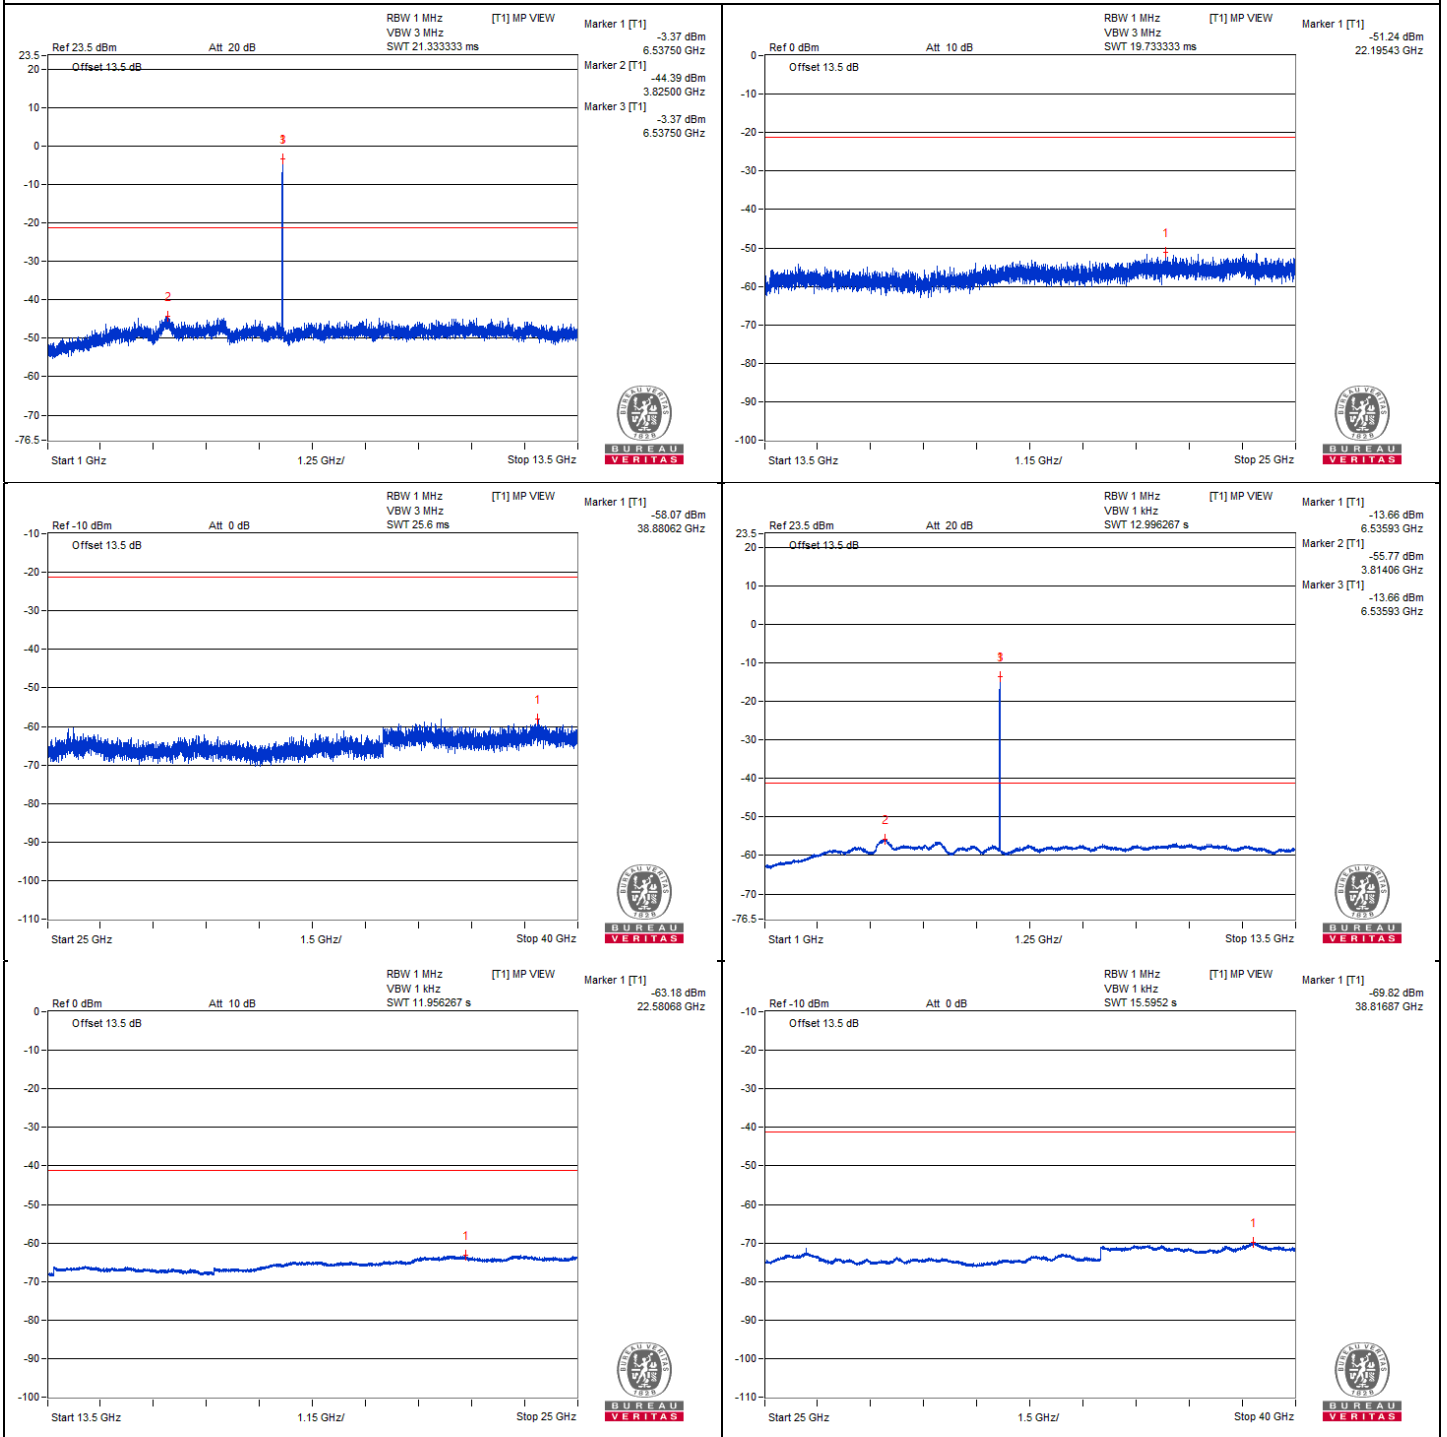

### 802.11be (EHT20) - Channel 149

#### Conducted spurious emission table


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 13382.81        | 58.95 PK                | 74             | -15.05      | -48.99          | -46.37 | 8.17                   | -36.31           |
| 2   | 13396.87        | 47.94 AV                | 54             | -6.06       | -58.21          | -58.81 | 8.17                   | -47.32           |
| 3   | 20083.75        | 50.98 PK                | 74             | -23.02      | -54.54          | -56.62 | 8.17                   | -44.28           |
| 4   | 20079.43        | 41.21 AV                | 54             | -12.79      | -65.1           | -65.37 | 8.17                   | -54.05           |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.




### Chain 0

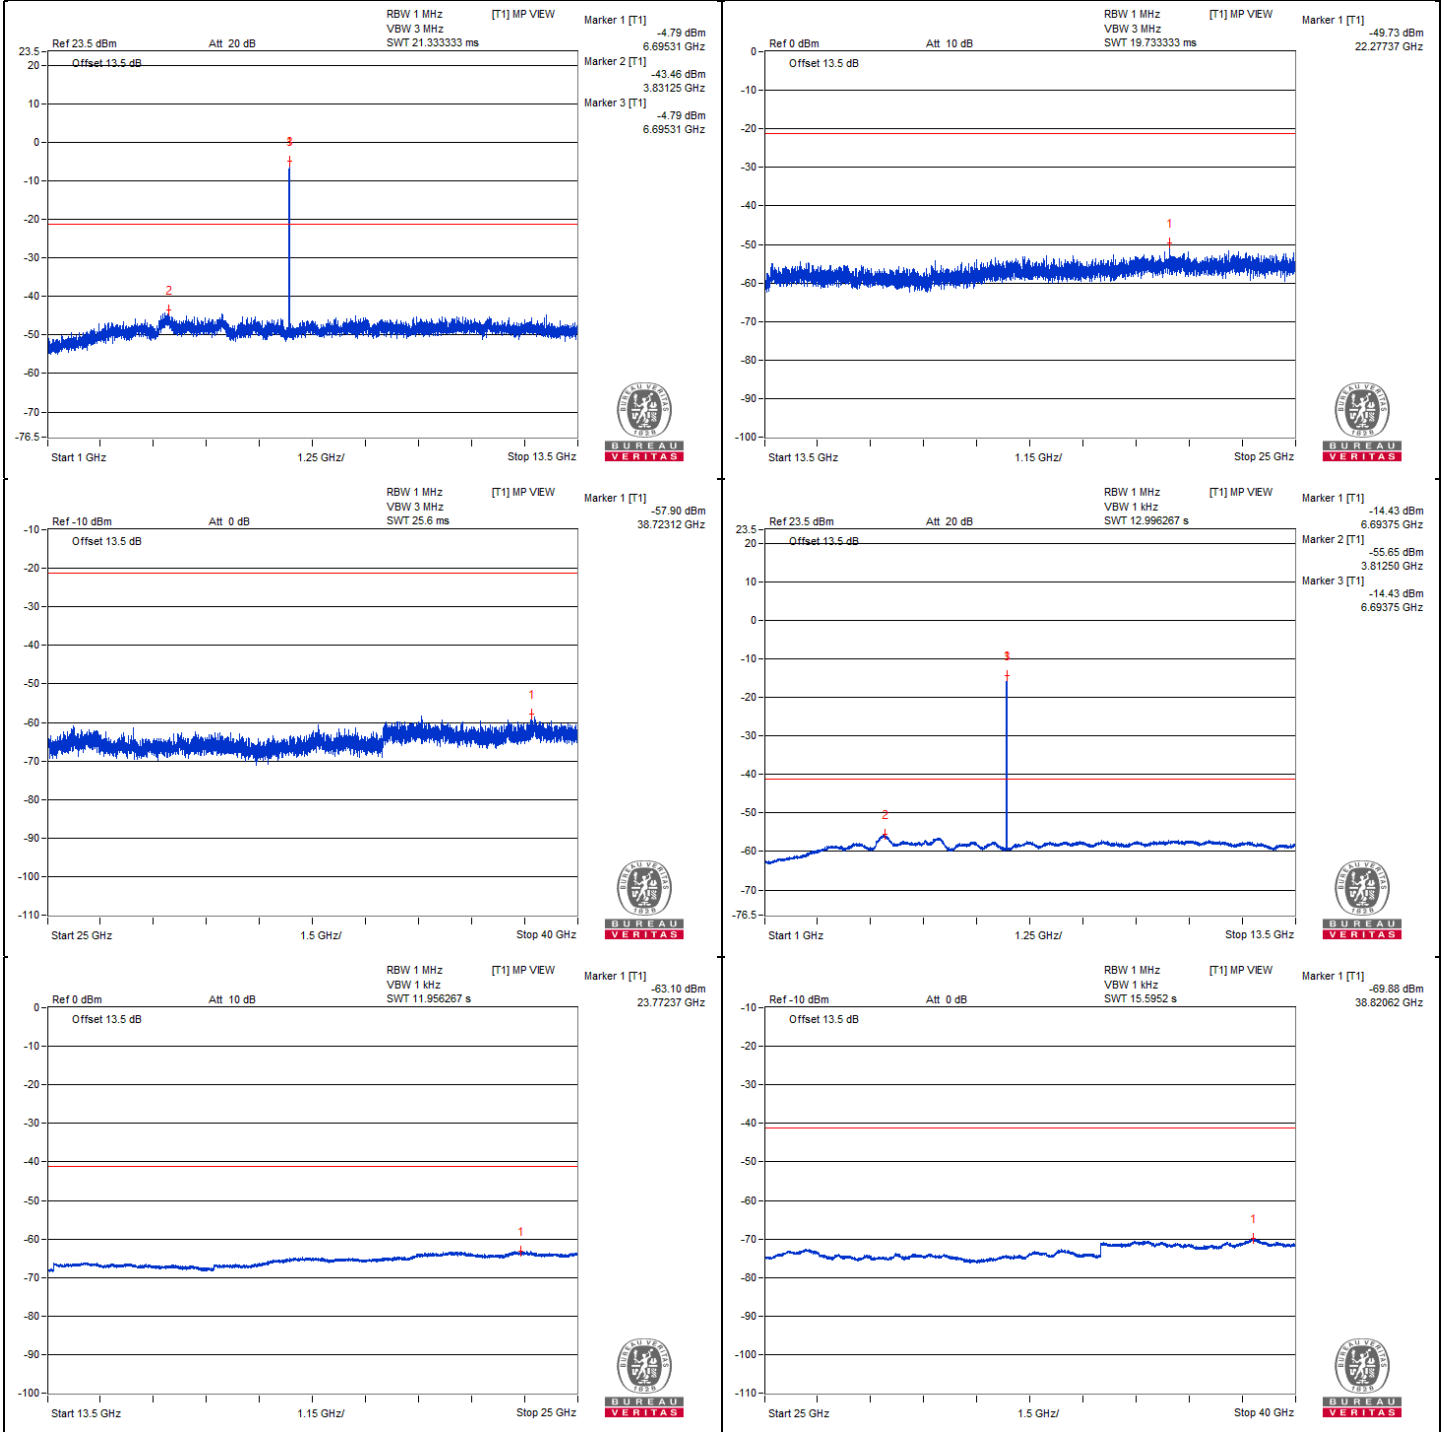



### Chain 1

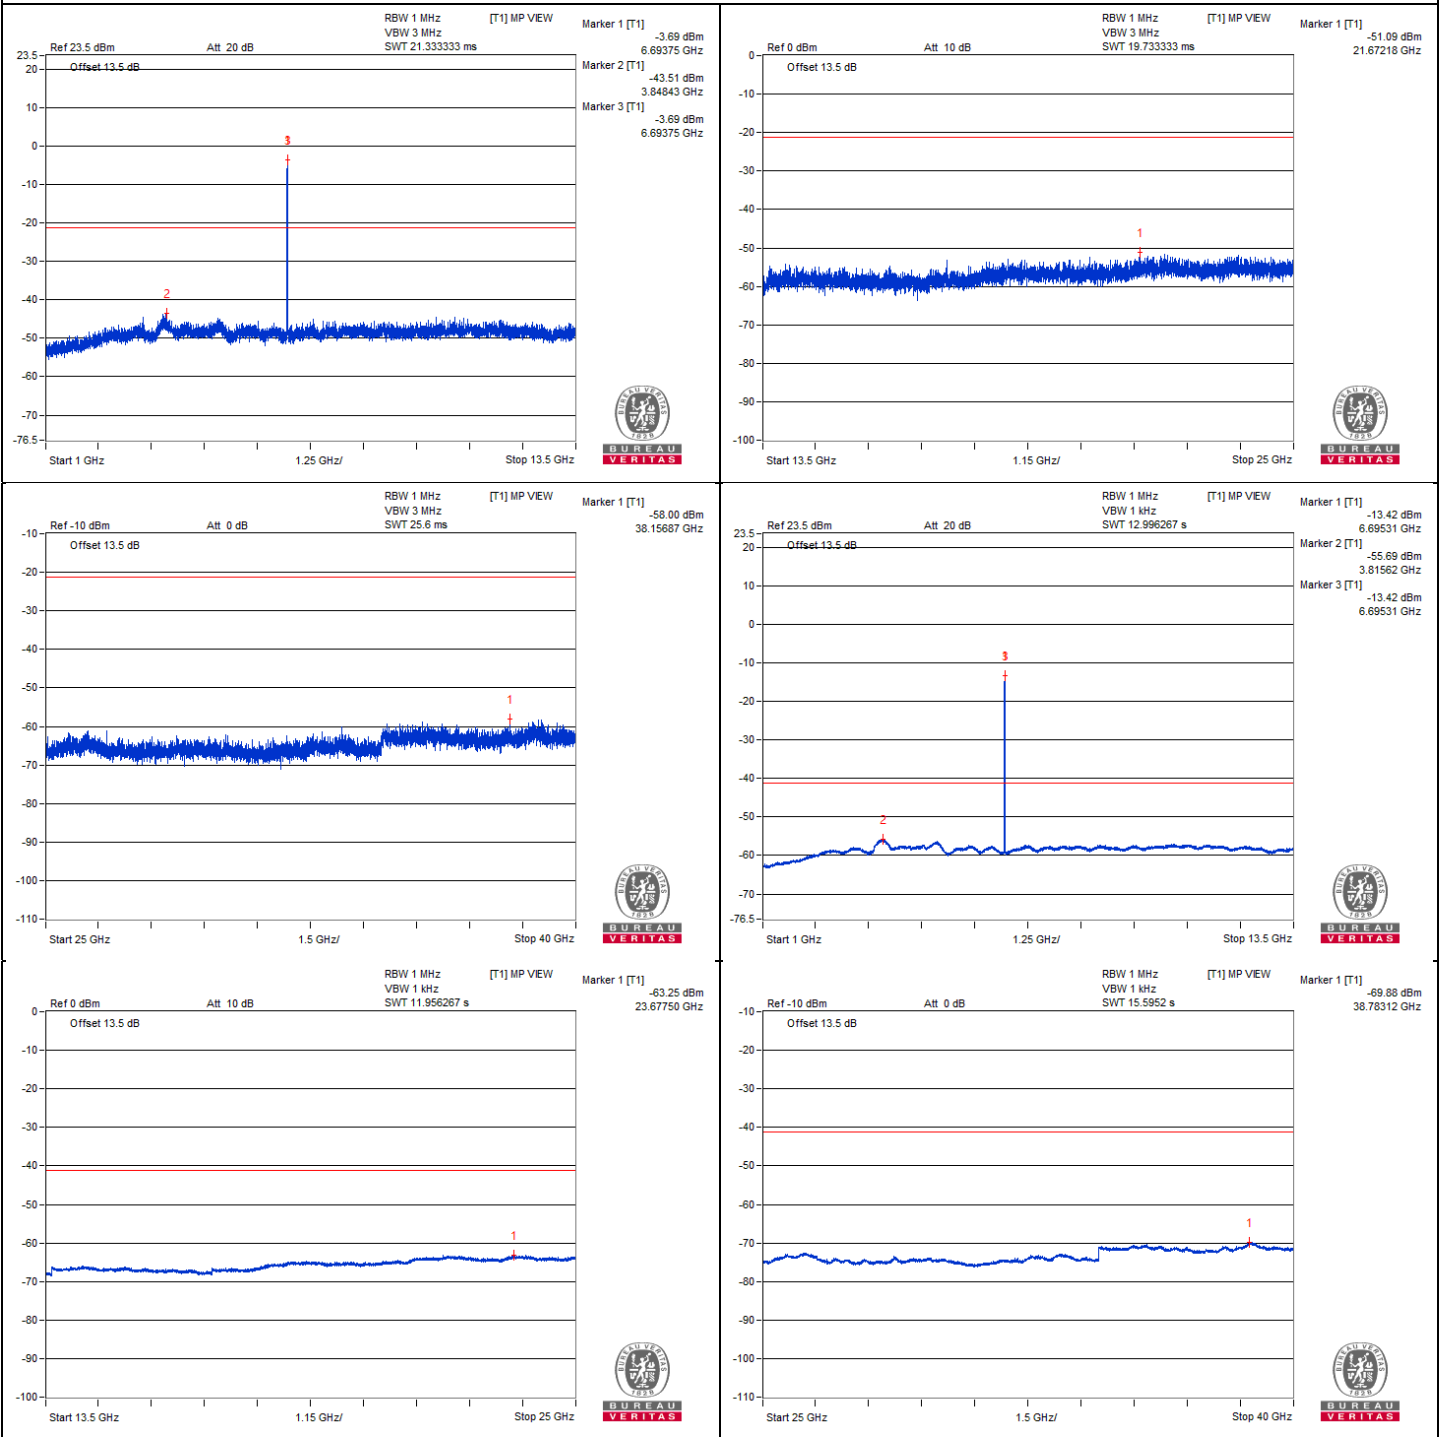

### 802.11be (EHT20) - Channel 181

#### Conducted spurious emission table







| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #13705.56       | 49.48 PK                | 88.2           | -38.72      | -55.75          | -58.64 | 8.17                   | -45.78           |
| 2   | #13704.12       | 39.63 AV                | 68.2           | -28.57      | -66.85          | -66.78 | 8.17                   | -55.63           |
| 3   | 20566.75        | 51.05 PK                | 74             | -22.95      | -54.42          | -56.63 | 8.17                   | -44.21           |
| 4   | 20561           | 41.1 AV                 | 54             | -12.9       | -65.14          | -65.54 | 8.17                   | -54.16           |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




### Chain 0

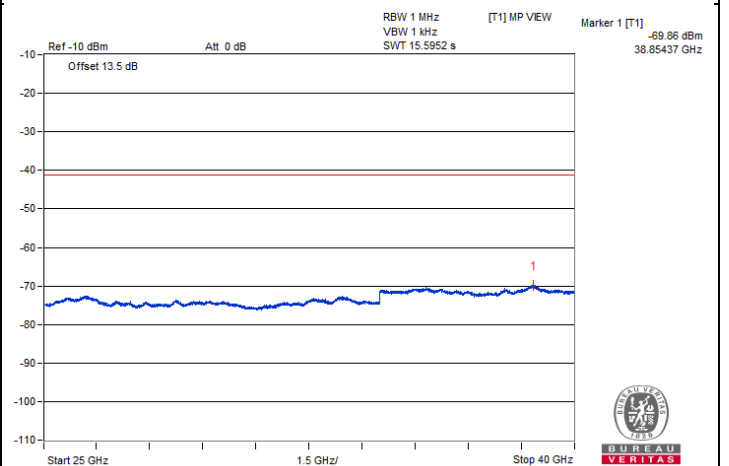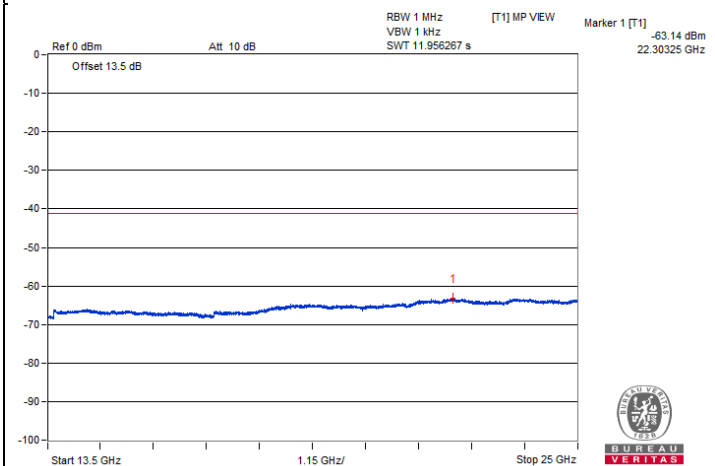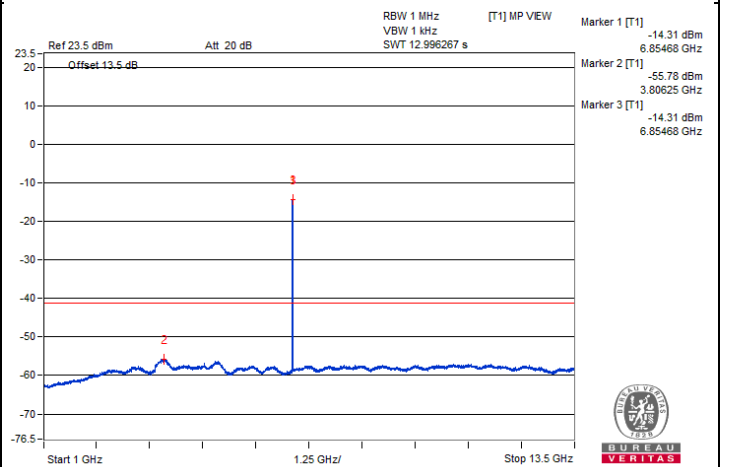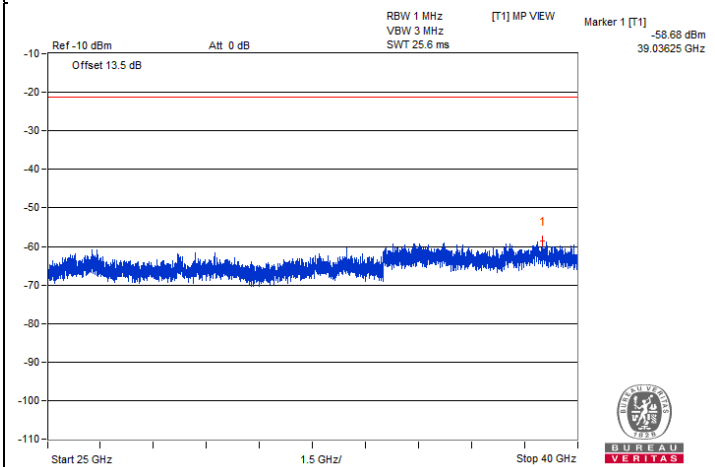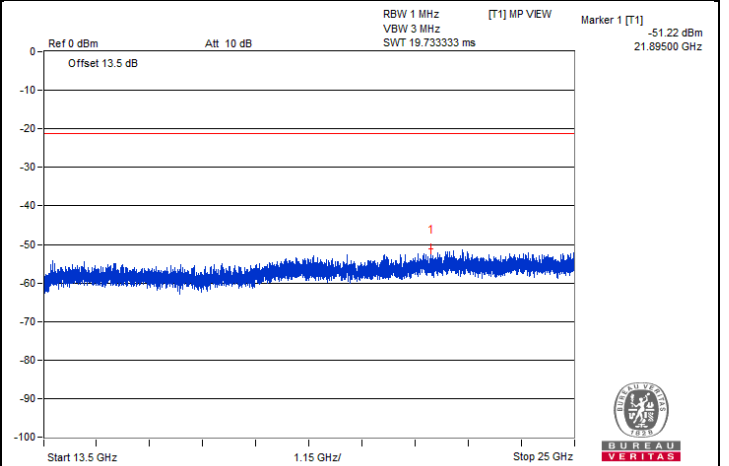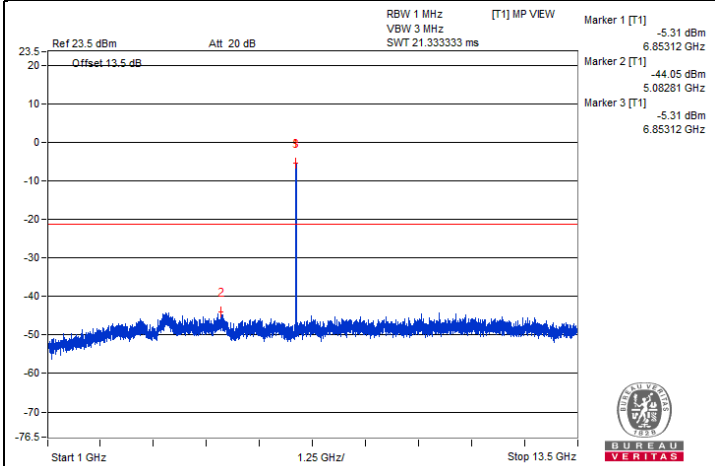



### Chain 1

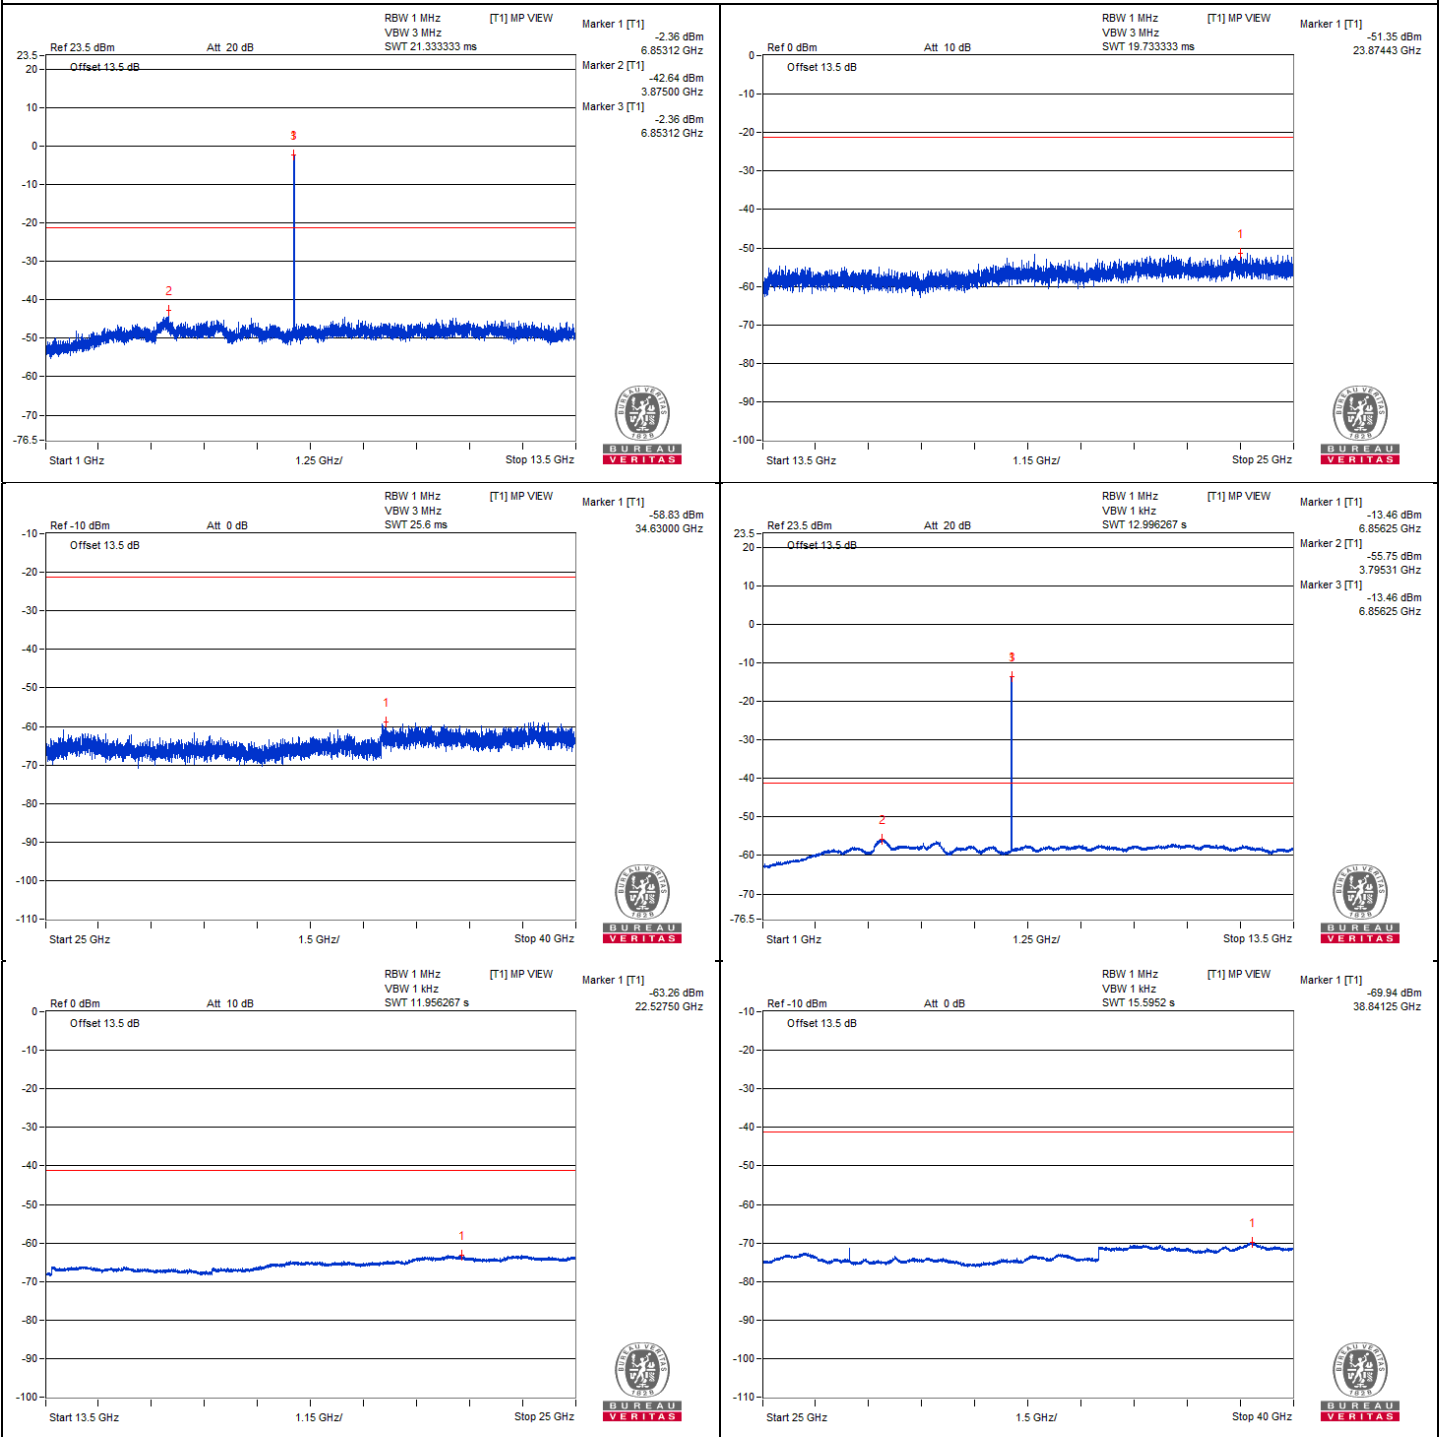



**802.11be (EHT20) - Channel 185**
**Conducted spurious emission table**


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #13750.12       | 49.28 PK                | 88.2           | -38.92      | -56.85          | -57.5  | 8.17                   | -45.98           |
| 2   | #13741.5        | 39.72 AV                | 68.2           | -28.48      | -66.75          | -66.69 | 8.17                   | -55.54           |
| 3   | 20625.68        | 50.34 PK                | 74             | -23.66      | -54.86          | -57.84 | 8.17                   | -44.92           |
| 4   | 20631.43        | 41.1 AV                 | 54             | -12.9       | -65.42          | -65.27 | 8.17                   | -54.16           |

**Remarks:**

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




### Chain 0

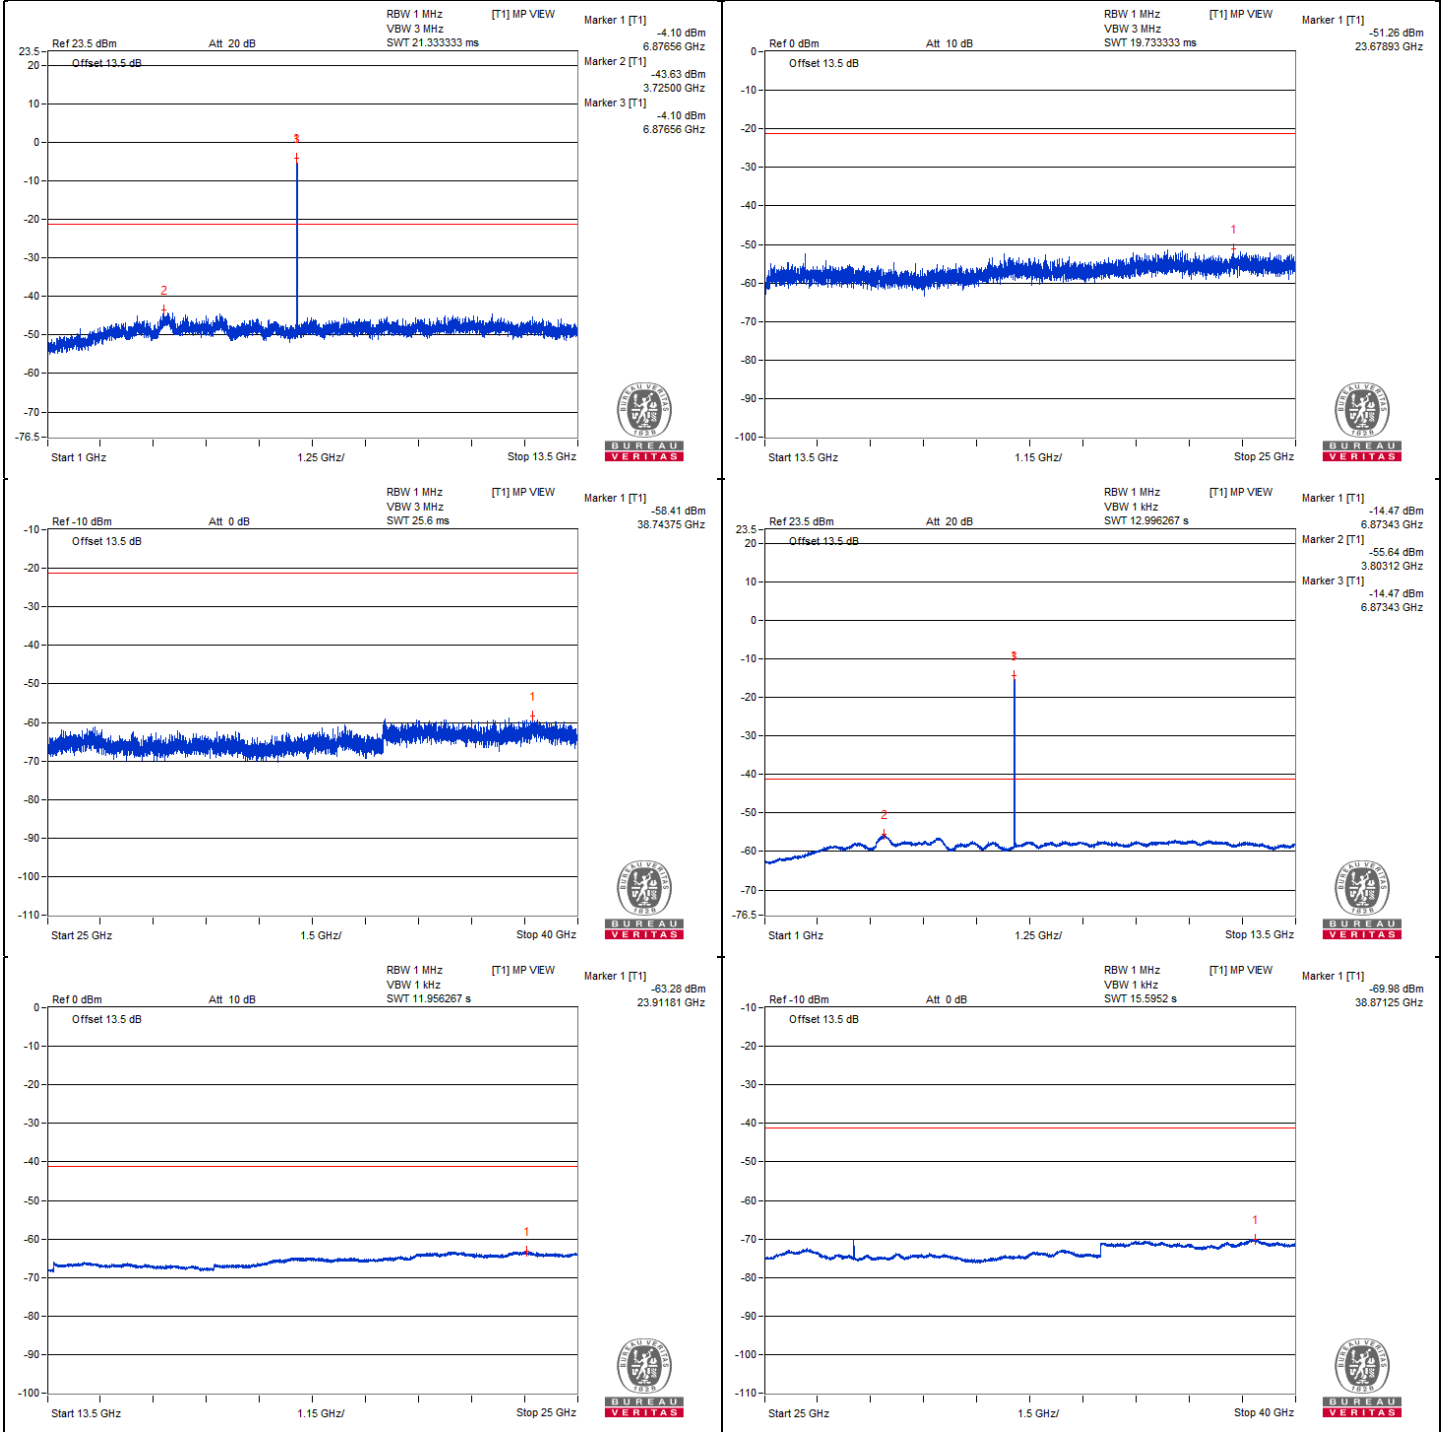



### Chain 1

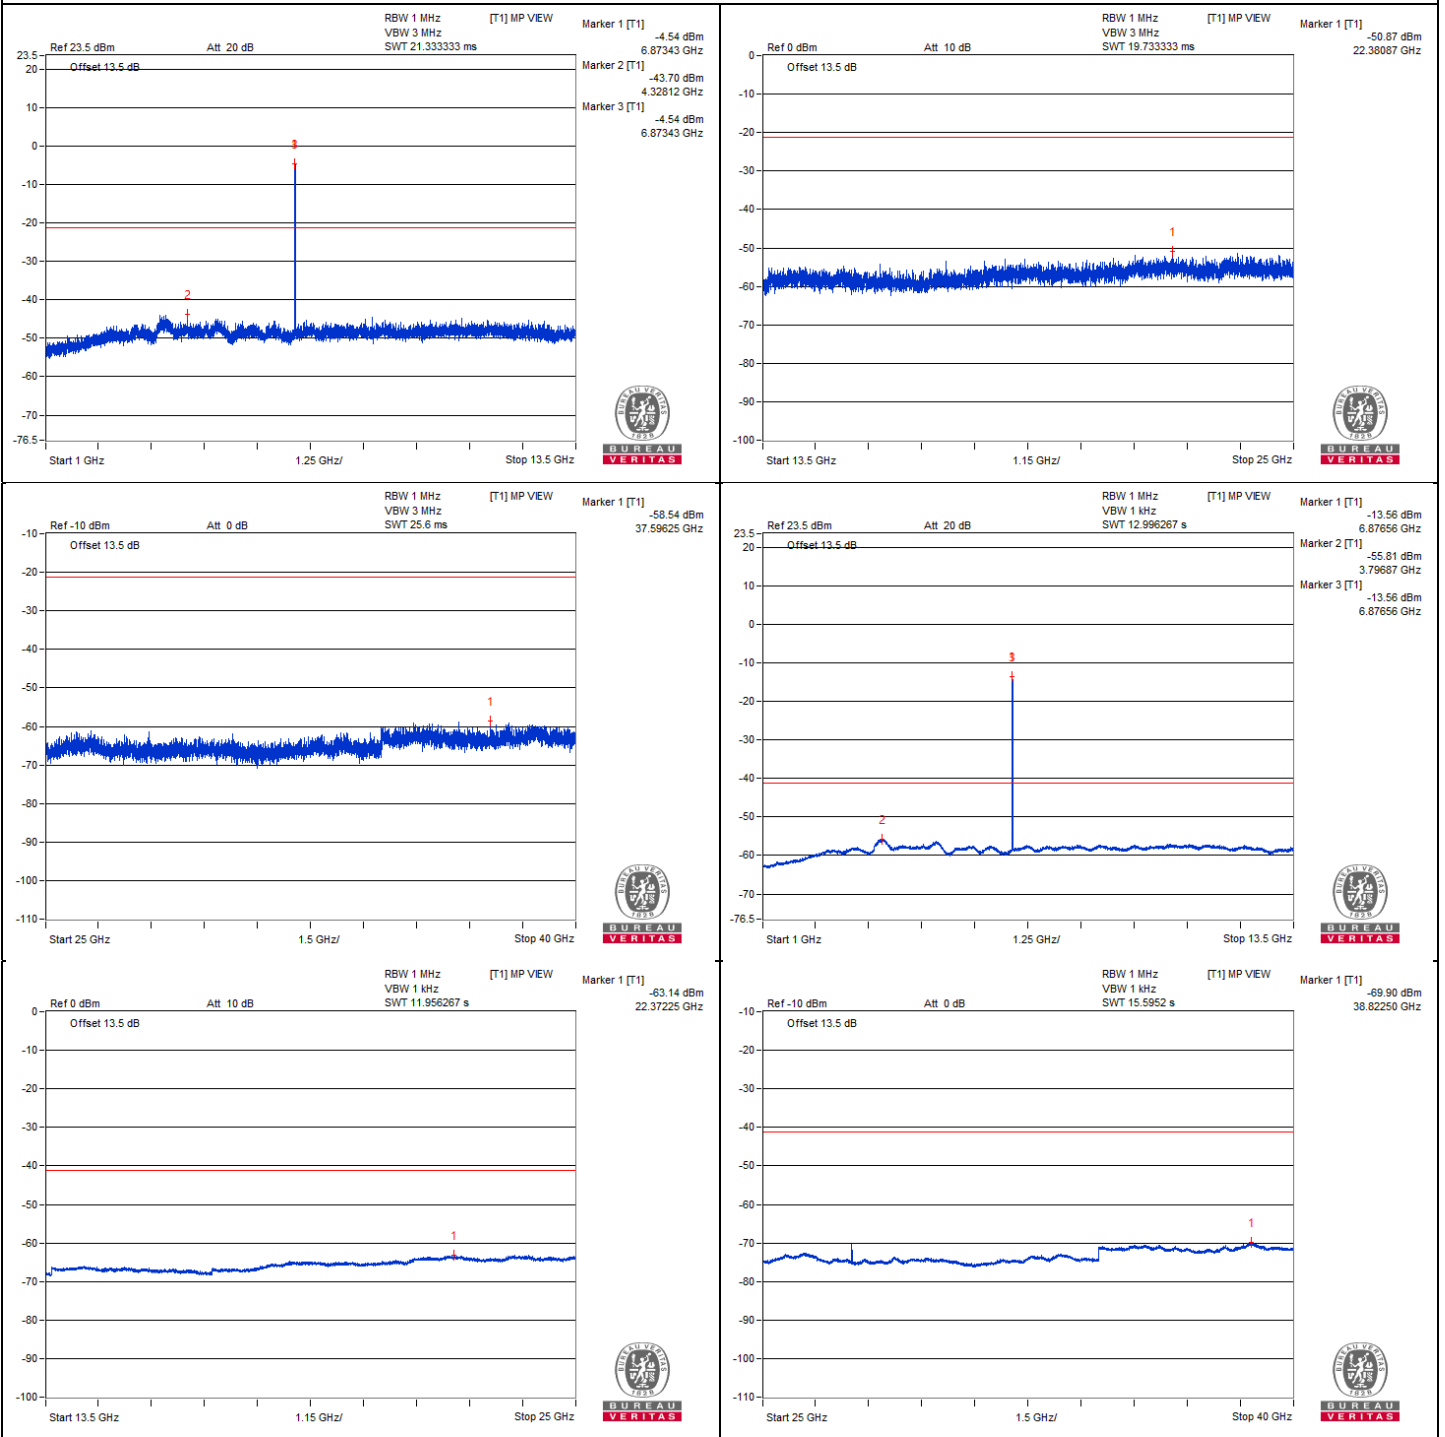

### 802.11be (EHT20) - Channel 209

#### Conducted spurious emission table


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #13995.93       | 49.51 PK                | 88.2           | -38.69      | -56.63          | -57.26 | 8.17                   | -45.75           |
| 2   | #13990.18       | 39.66 AV                | 68.2           | -28.54      | -66.97          | -66.6  | 8.17                   | -55.60           |
| 3   | 20975           | 51.64 PK                | 74             | -22.36      | -55.9           | -53.93 | 8.17                   | -43.62           |
| 4   | 20989.37        | 41.32 AV                | 54             | -12.68      | -65.07          | -65.17 | 8.17                   | -53.94           |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




### Chain 0

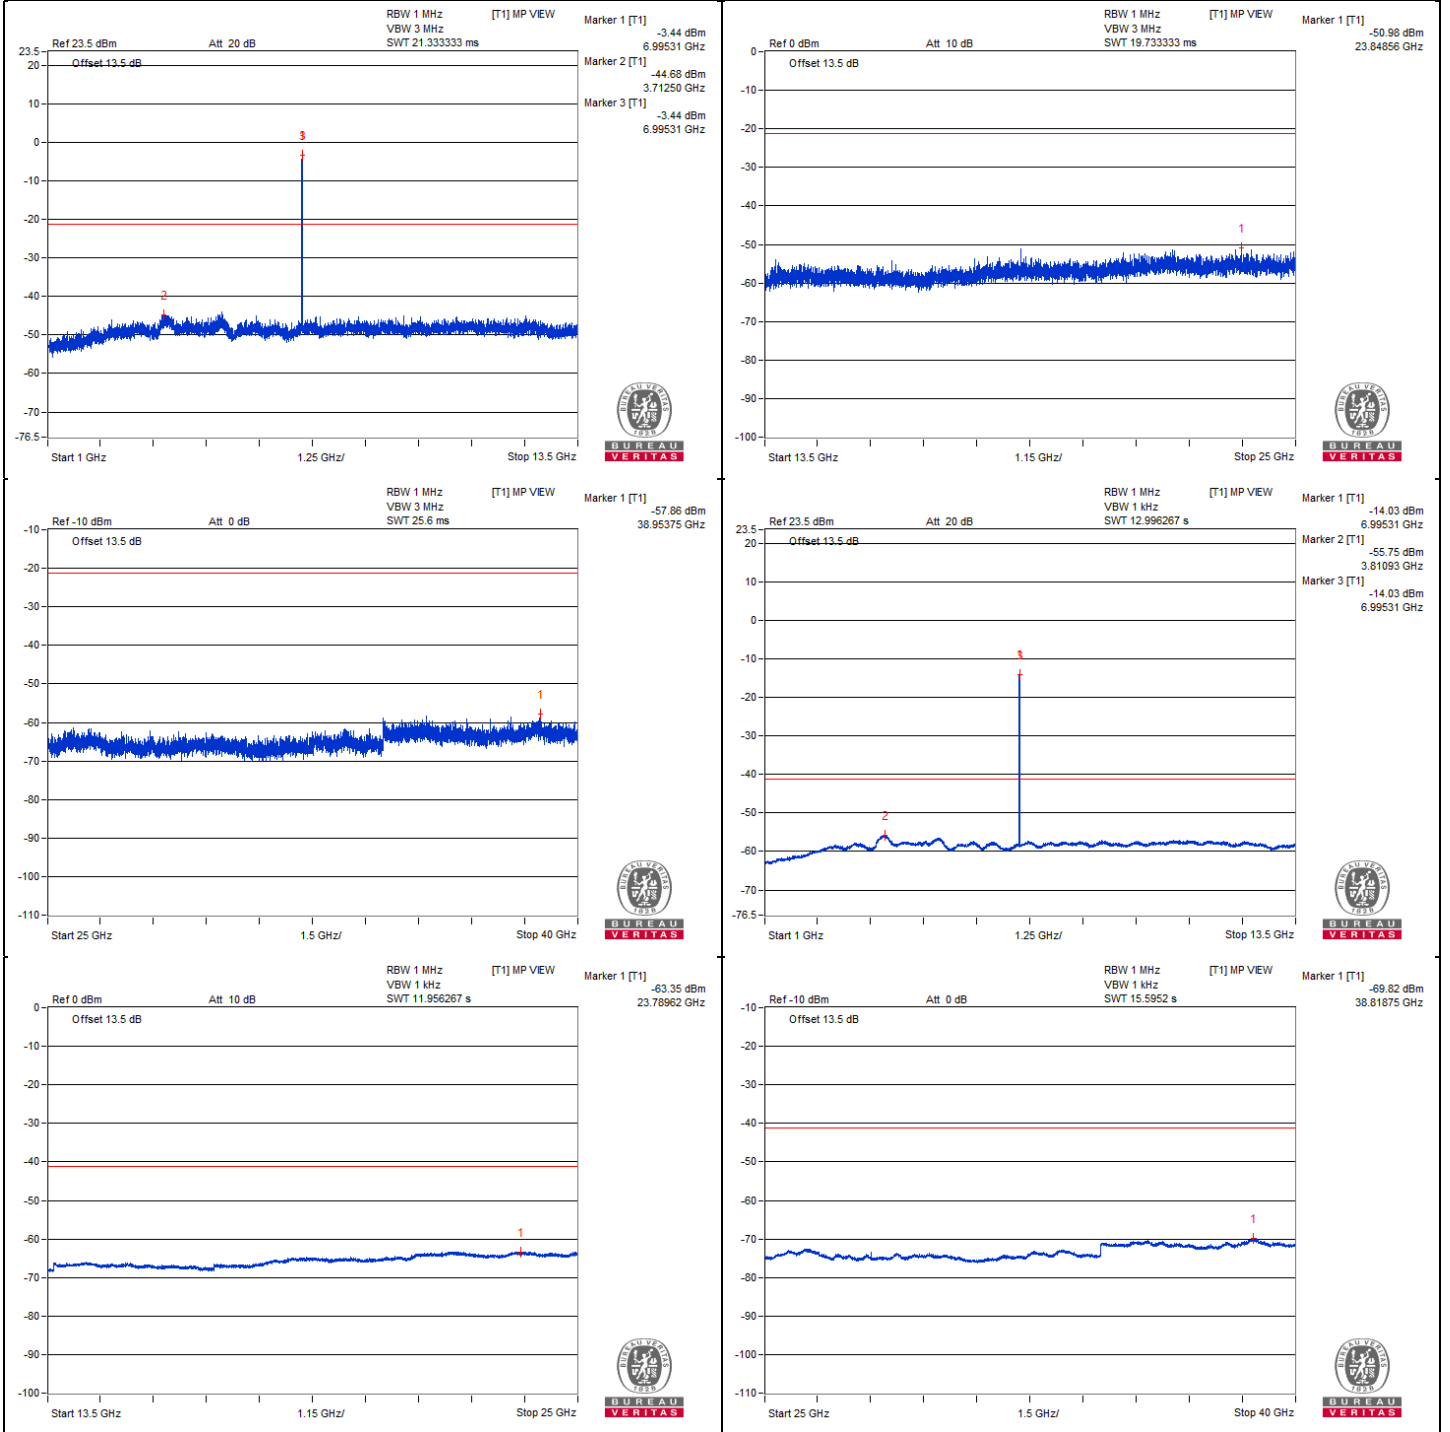



### Chain 1

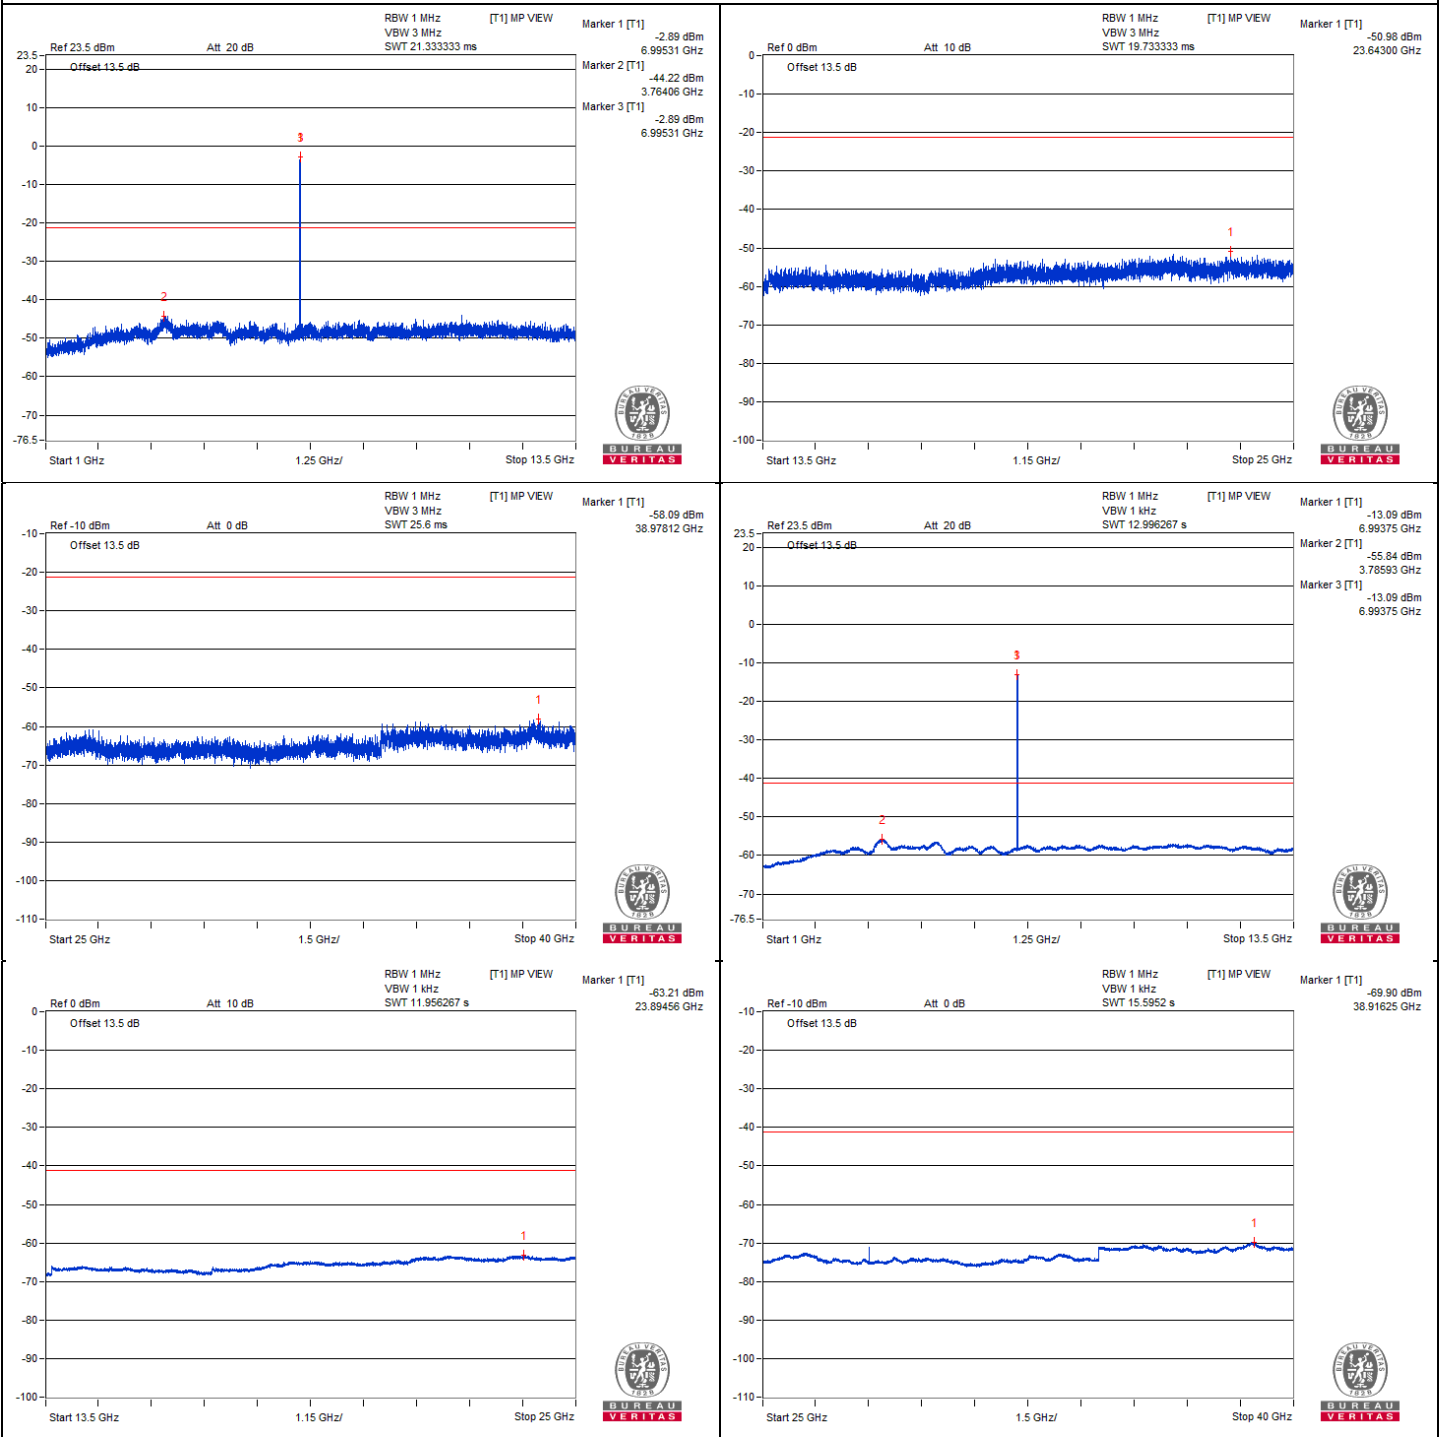

### 802.11be (EHT20) - Channel 233

#### Conducted spurious emission table







| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #14228.81       | 50.04 PK                | 88.2           | -38.16      | -55.52          | -57.51 | 8.17                   | -45.22           |
| 2   | #14233.12       | 40.11 AV                | 68.2           | -28.09      | -66.3           | -66.37 | 8.17                   | -55.15           |
| 3   | 21340.12        | 50.8 PK                 | 74             | -23.2       | -56.17          | -55.16 | 8.17                   | -44.46           |
| 4   | 21344.43        | 41.36 AV                | 54             | -12.64      | -64.97          | -65.19 | 8.17                   | -53.90           |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




### Chain 0

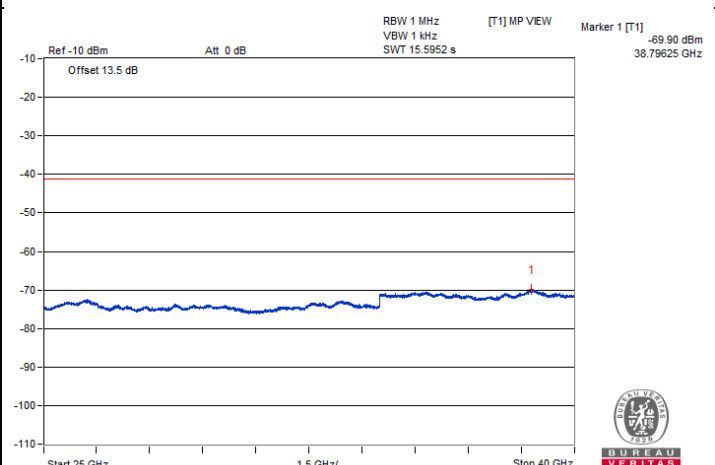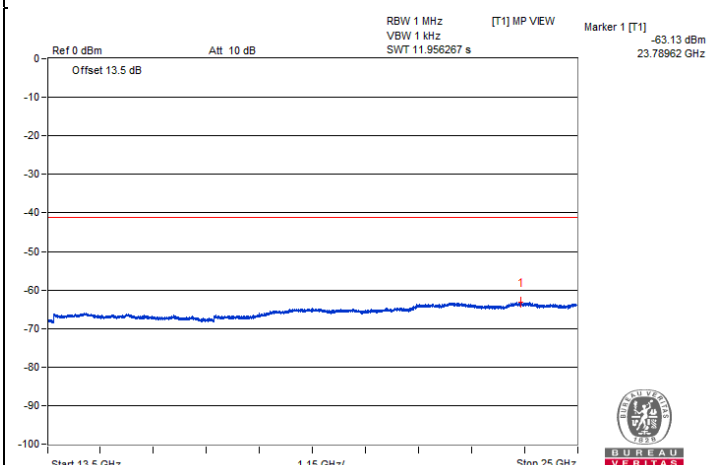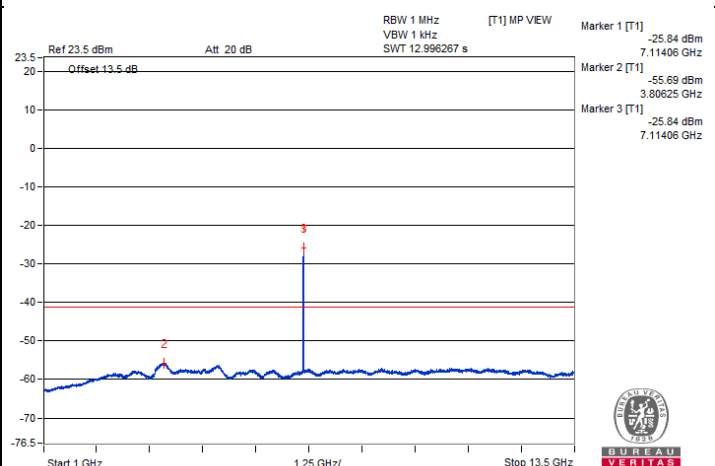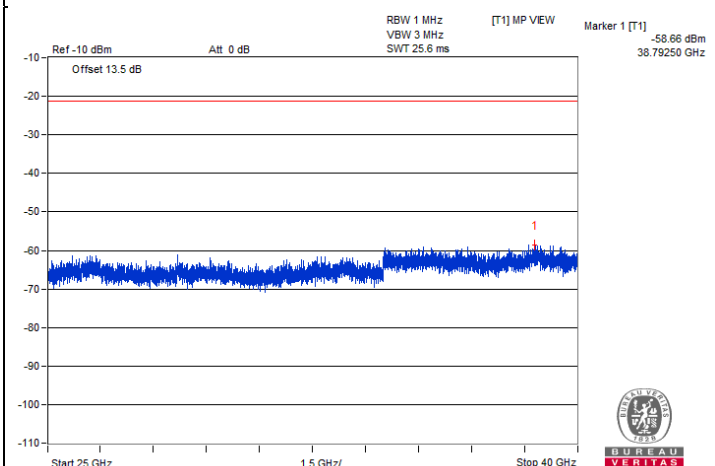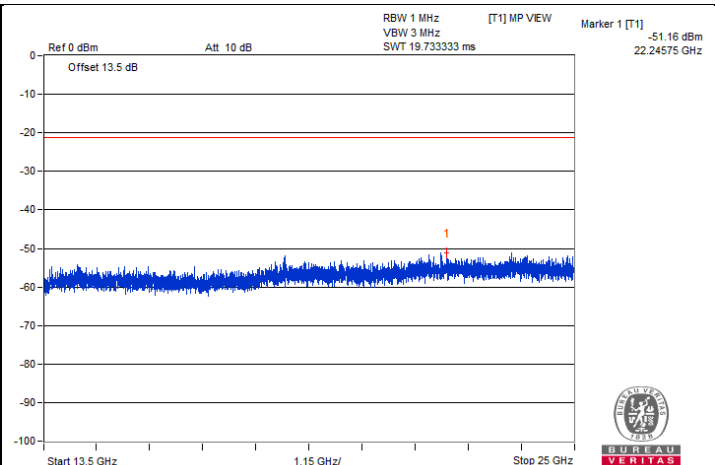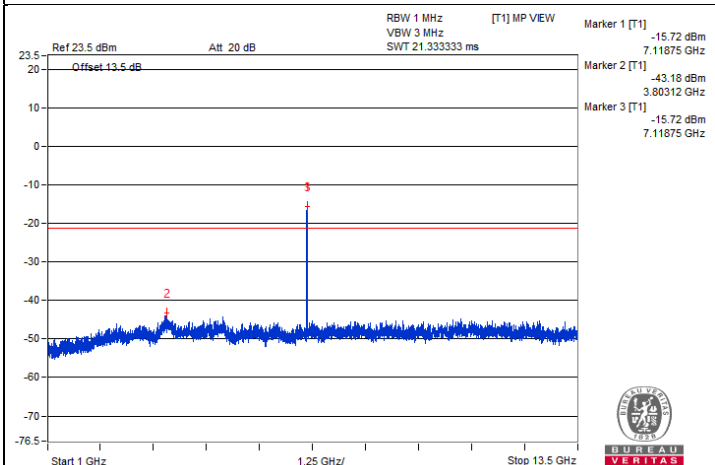





### Chain 1

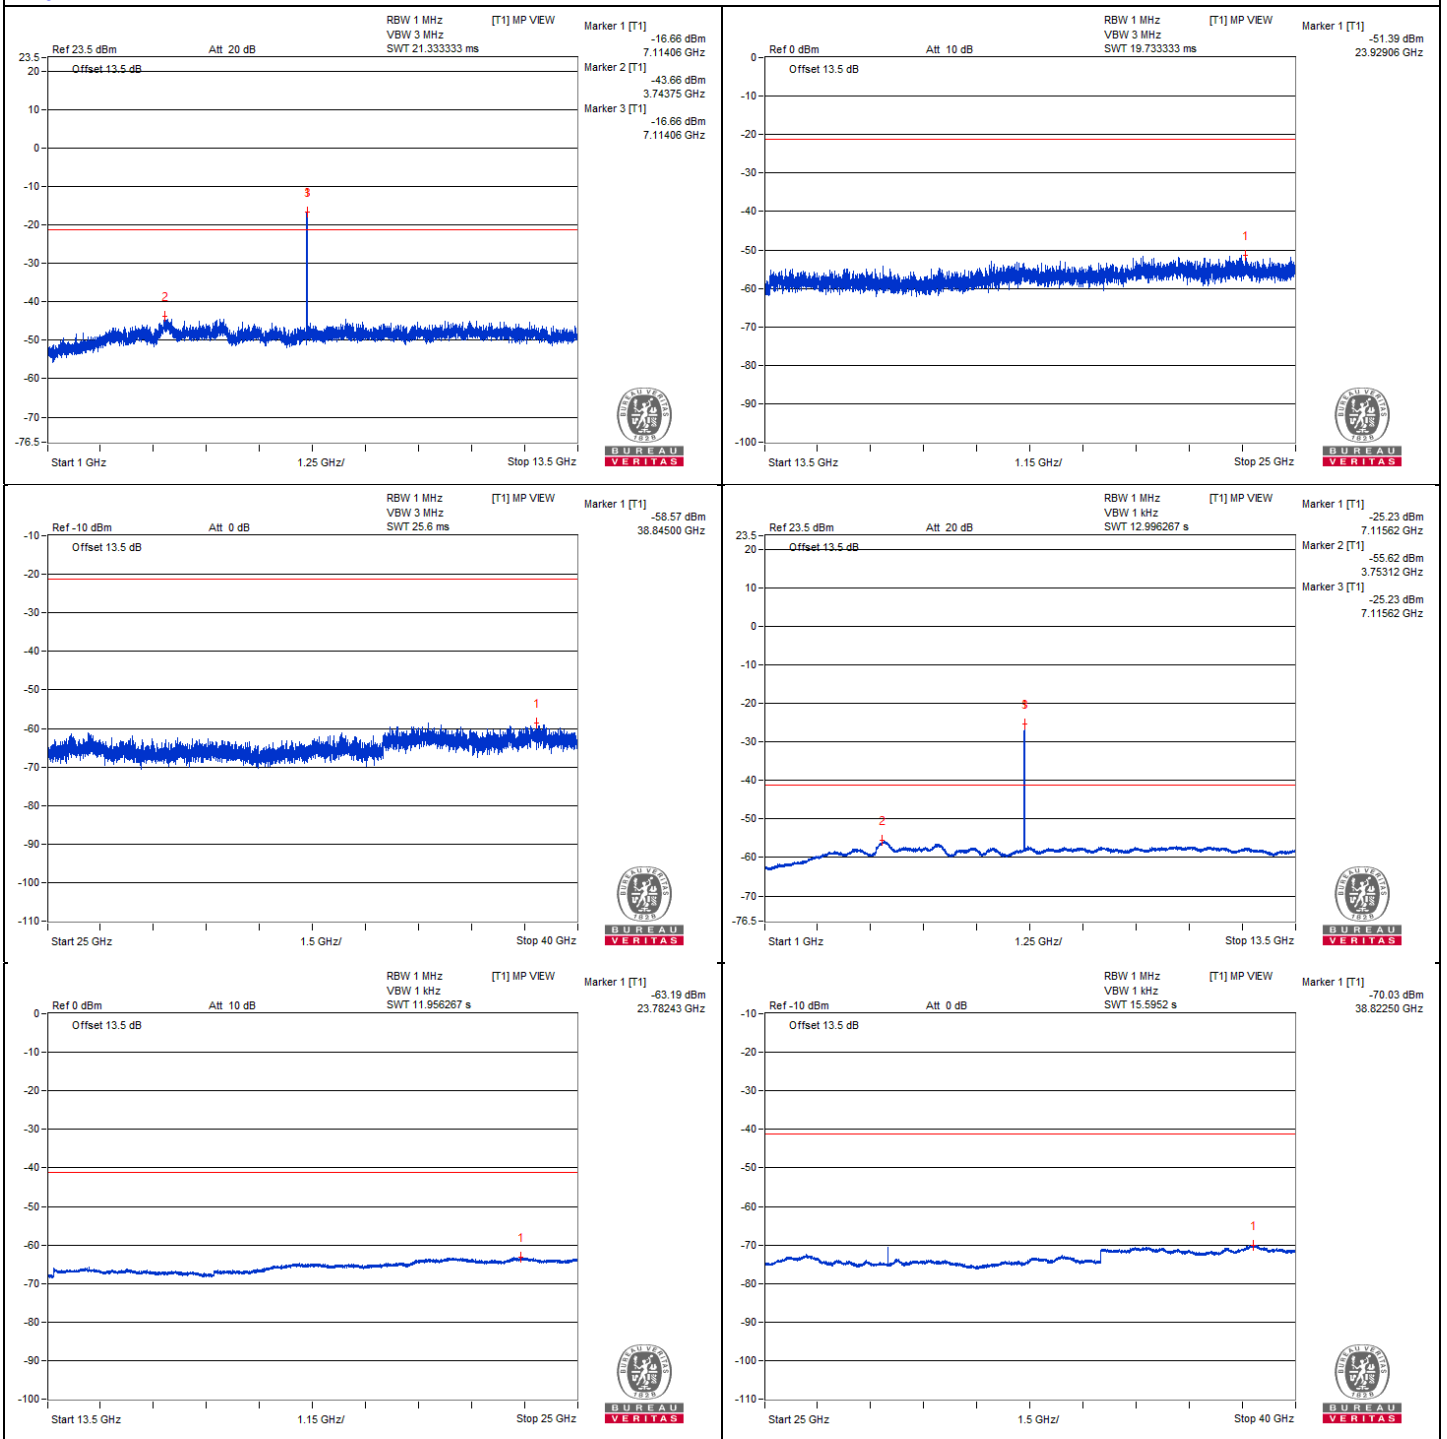


**Bandedge table**

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #7125           | 77.26 PK                | 88.2           | -10.94      | -30.24          | -28.27 | 8.13                   | -18.00           |
| 2   | #7125           | 67.51 AV                | 68.2           | -0.69       | -39.33          | -38.5  | 8.13                   | -27.75           |


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

**Chain 0**

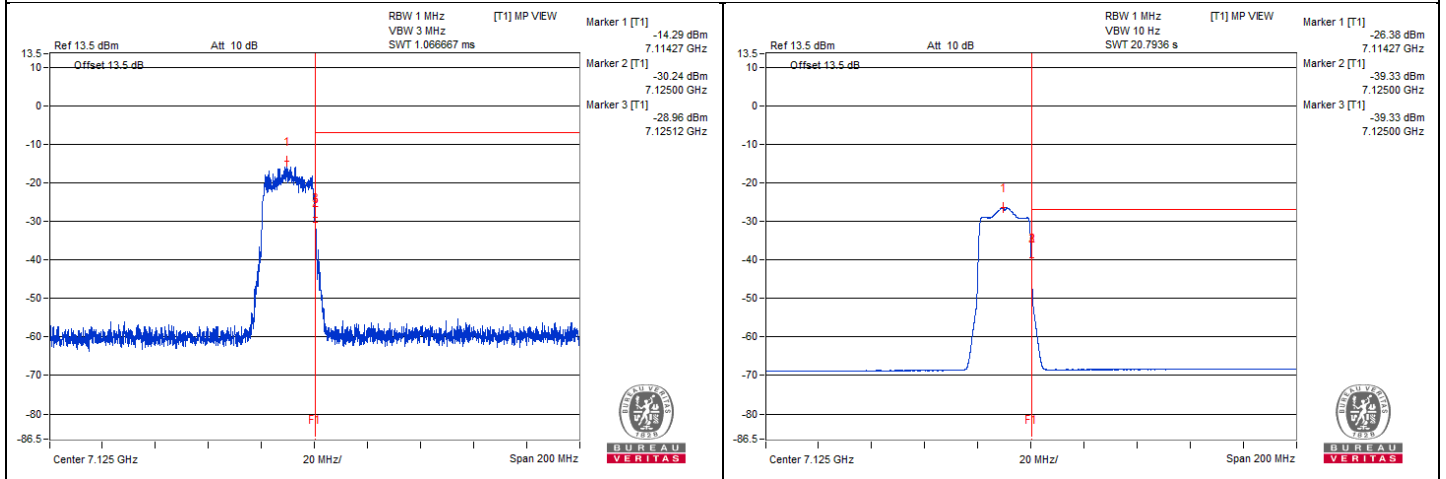

**Chain 1**

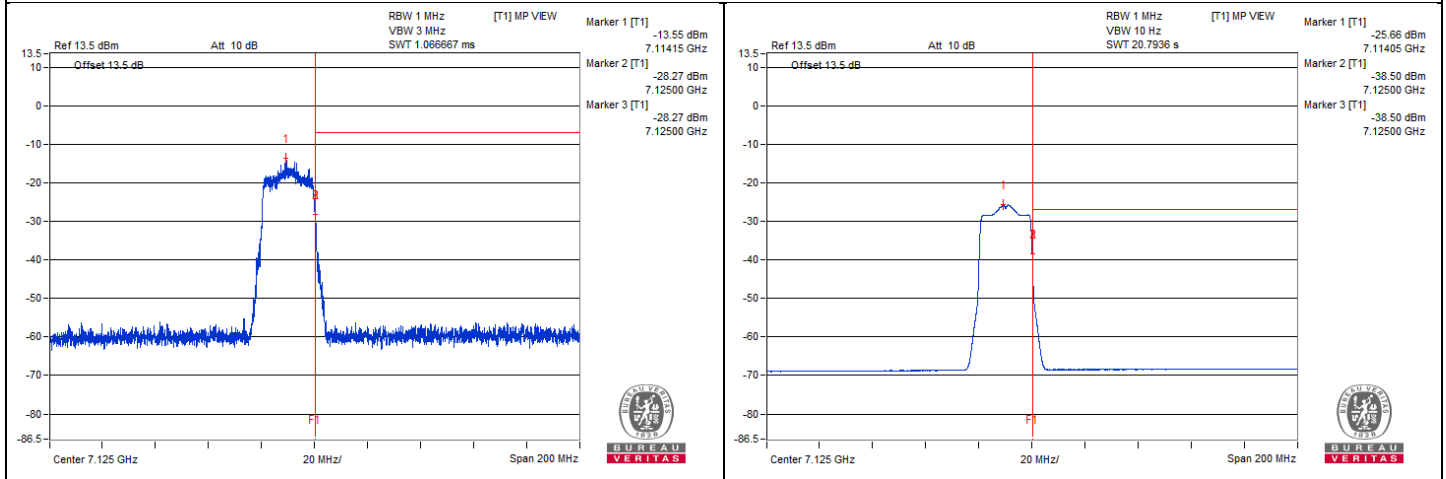

### 802.11be (EHT40) - Channel 3

#### Conducted spurious emission table


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 11928.12        | 59.02 PK                | 74             | -14.98      | -49.06          | -46.23 | 8.17                   | -36.24           |
| 2   | 11928.12        | 48.41 AV                | 54             | -5.59       | -57.93          | -58.14 | 8.17                   | -46.85           |
| 3   | 17895.87        | 48.72 PK                | 74             | -25.28      | -56.26          | -59.93 | 8.17                   | -46.54           |
| 4   | 17898.75        | 39.49 AV                | 54             | -14.51      | -67.14          | -66.77 | 8.17                   | -55.77           |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.




### Chain 0

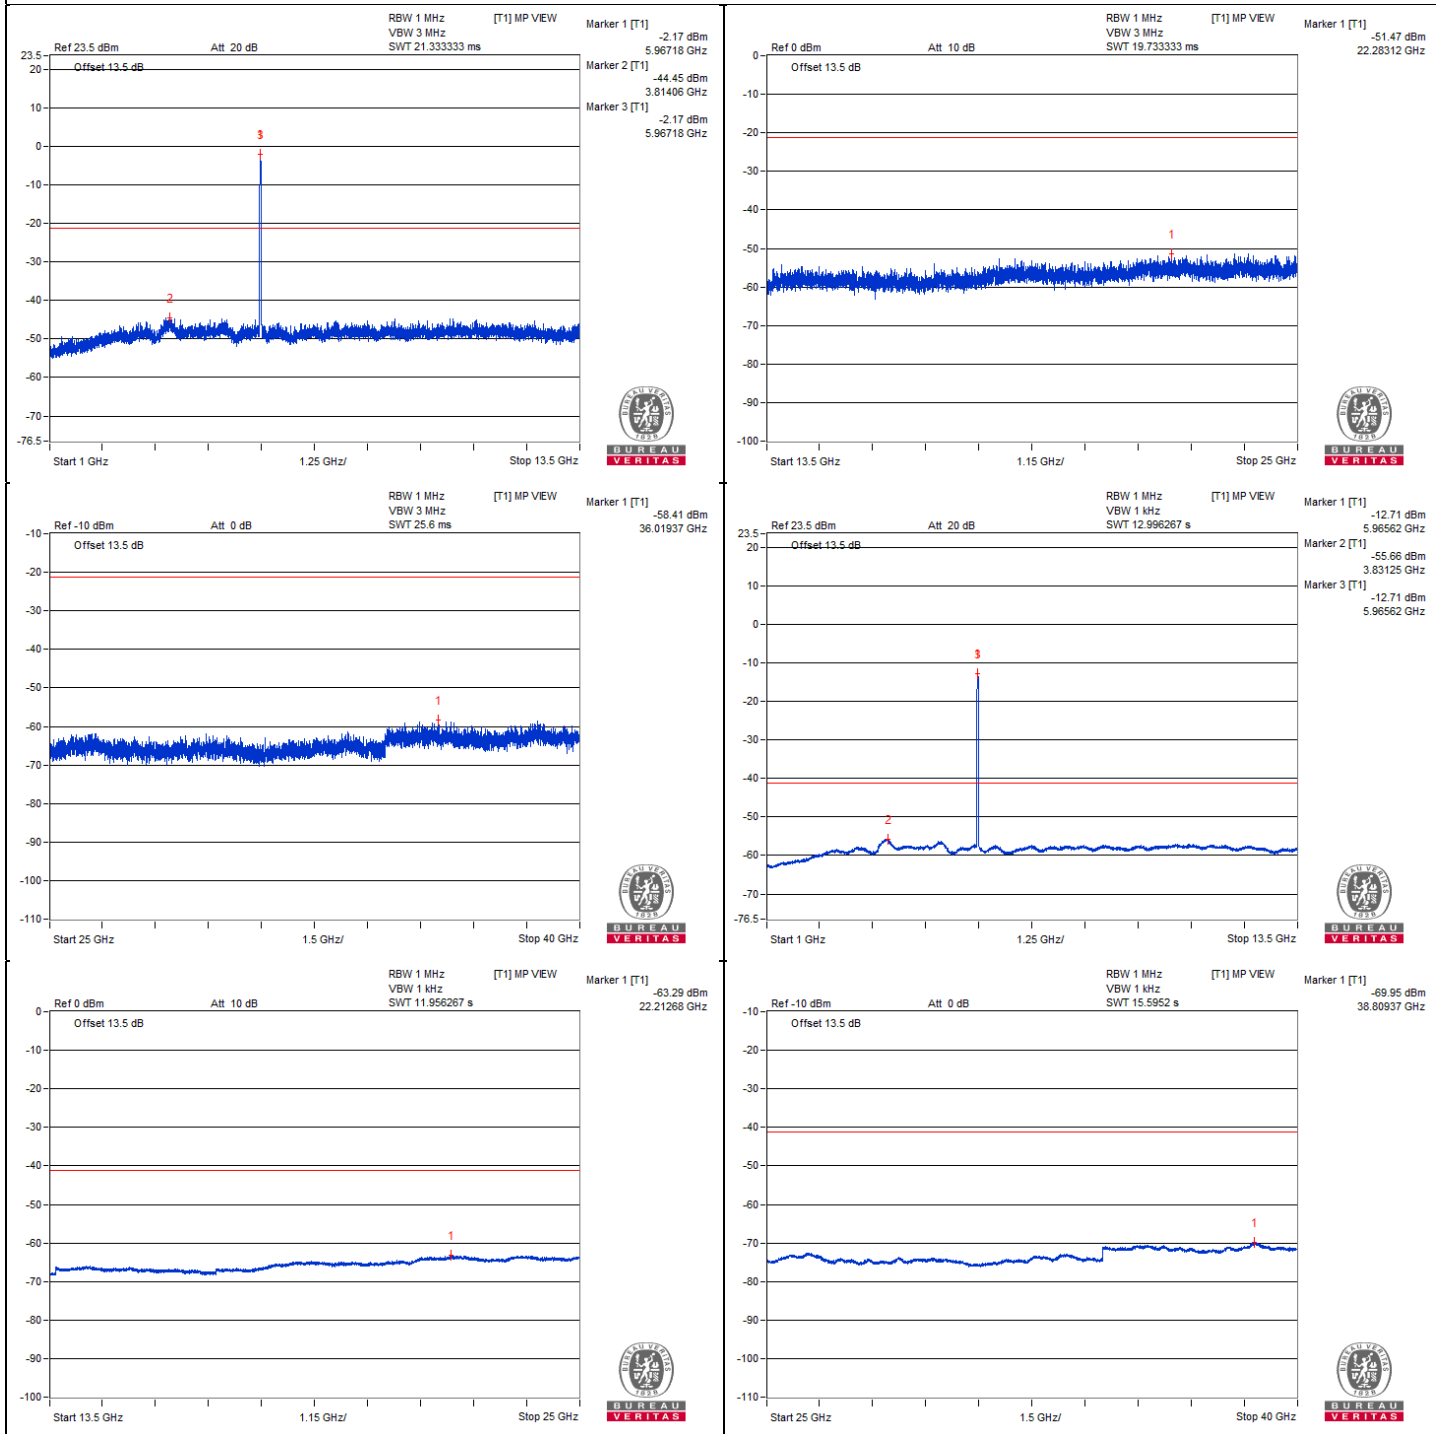



### Chain 1

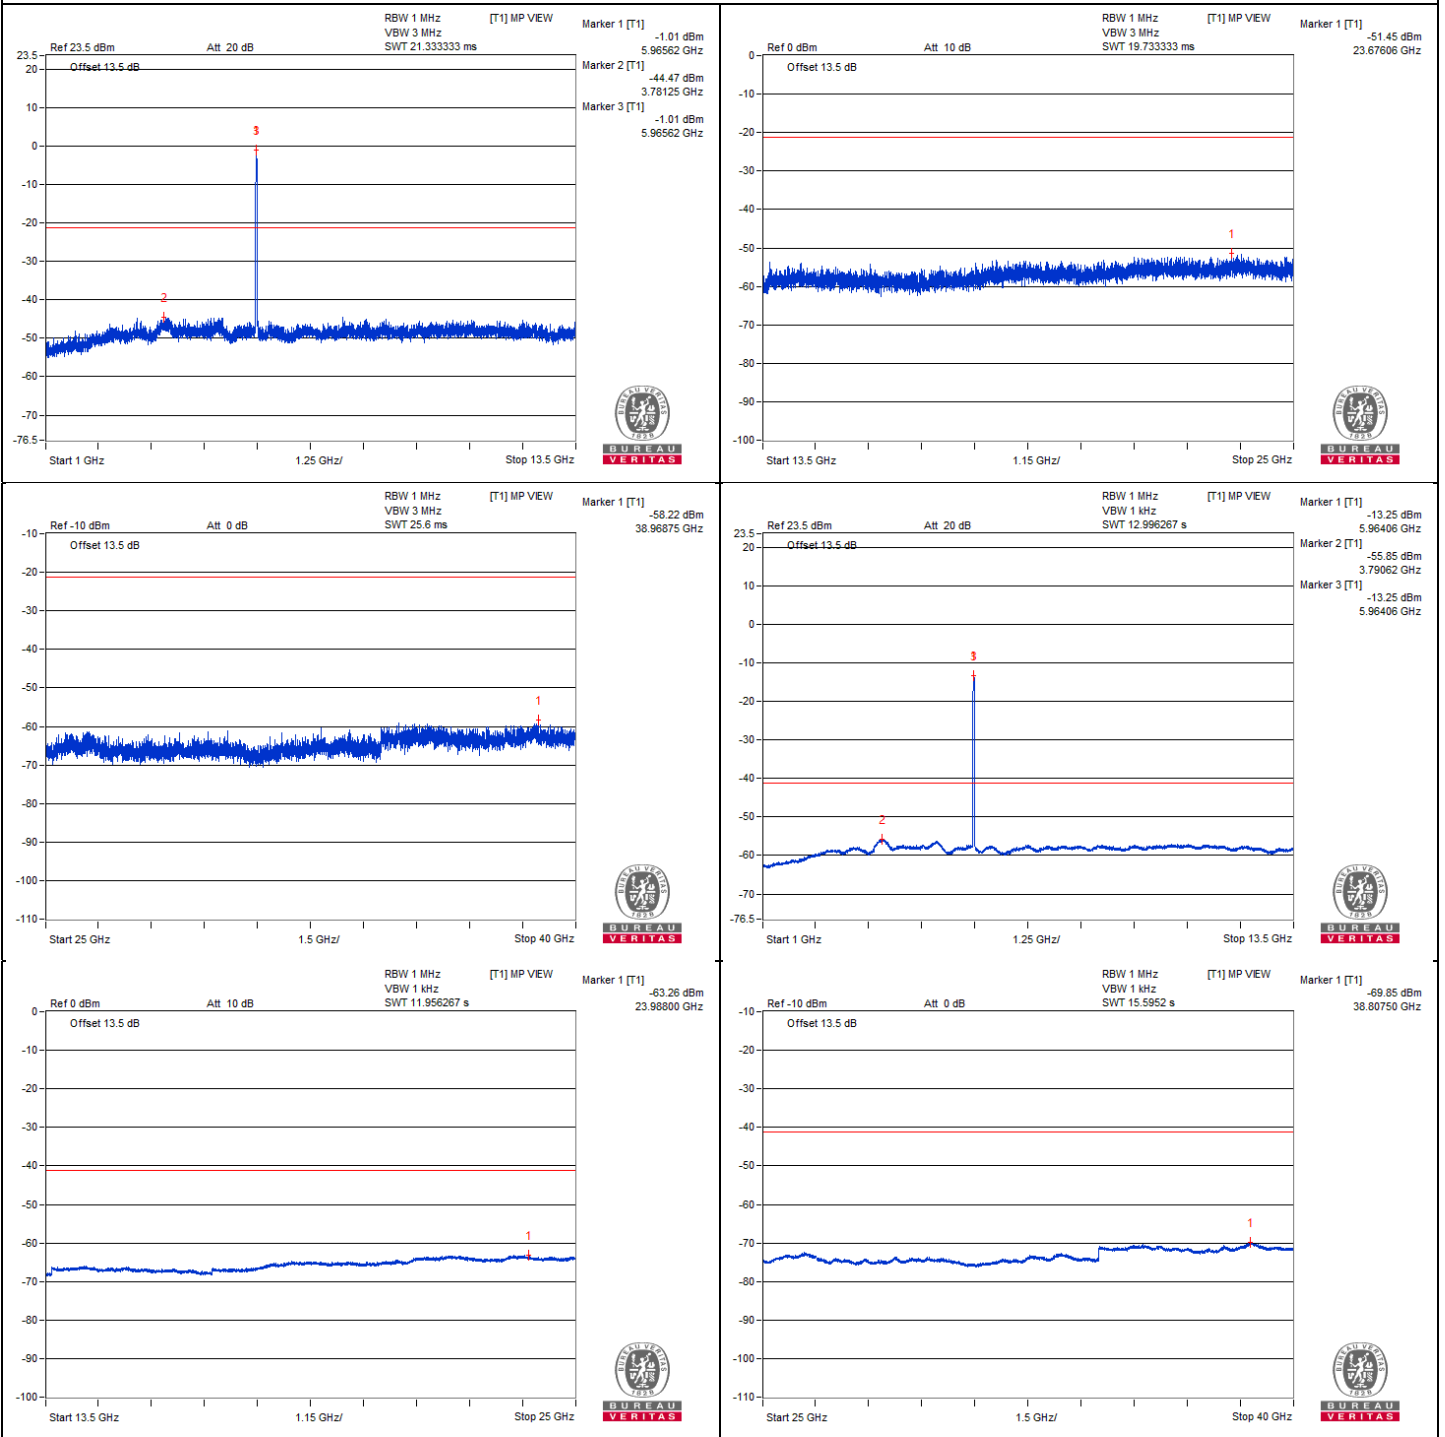


**Bandedge table**

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #5875.12        | 59.85 PK                | 88.2           | -28.35      | -47.18          | -46.03 | 8.15                   | -35.41           |
| 2   | #5858.82        | 40.25 AV                | 68.2           | -27.95      | -66.11          | -66.23 | 8.15                   | -55.01           |


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

**Chain 0**

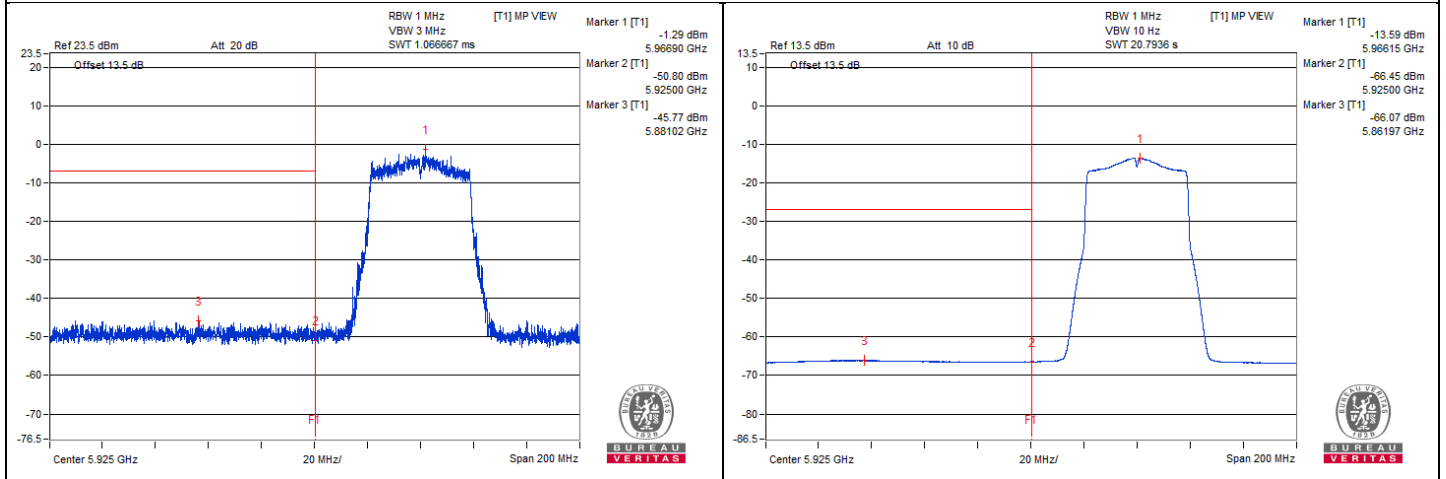

**Chain 1**

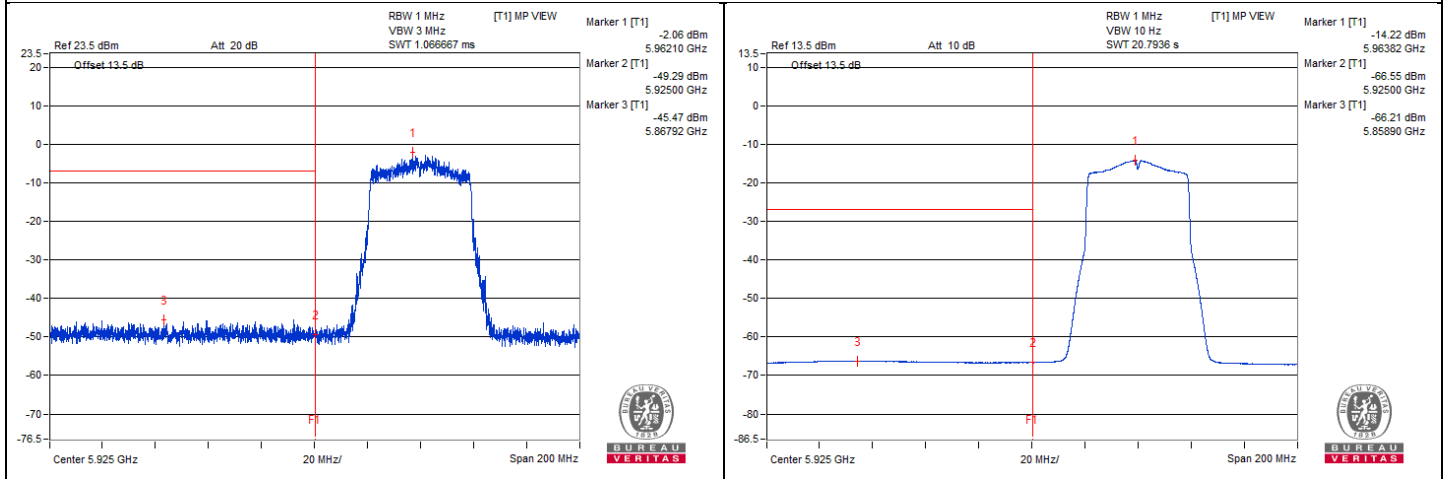

### 802.11be (EHT40) - Channel 43

#### Conducted spurious emission table







| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 12325           | 60.48 PK                | 74             | -13.52      | -44.85          | -47.45 | 8.17                   | -34.78           |
| 2   | 12329.68        | 48.65 AV                | 54             | -5.35       | -57.69          | -57.89 | 8.17                   | -46.61           |
| 3   | 18493.87        | 50.74 PK                | 74             | -23.26      | -57.6           | -54.39 | 8.17                   | -44.52           |
| 4   | 18495.31        | 40.9 AV                 | 54             | -13.1       | -65.41          | -65.68 | 8.17                   | -54.36           |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.




### Chain 0

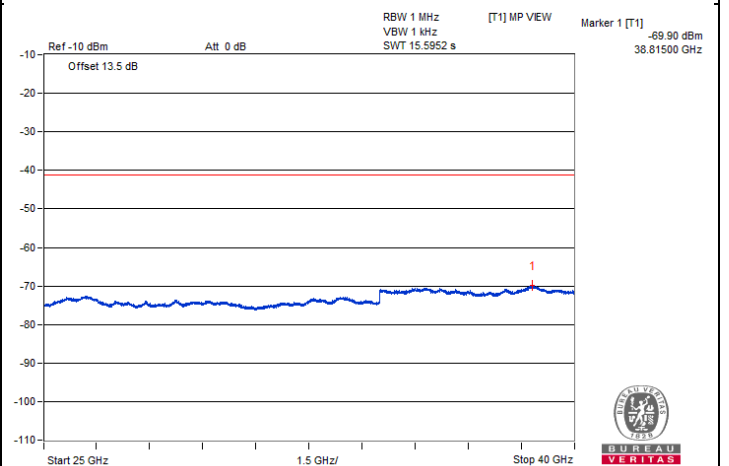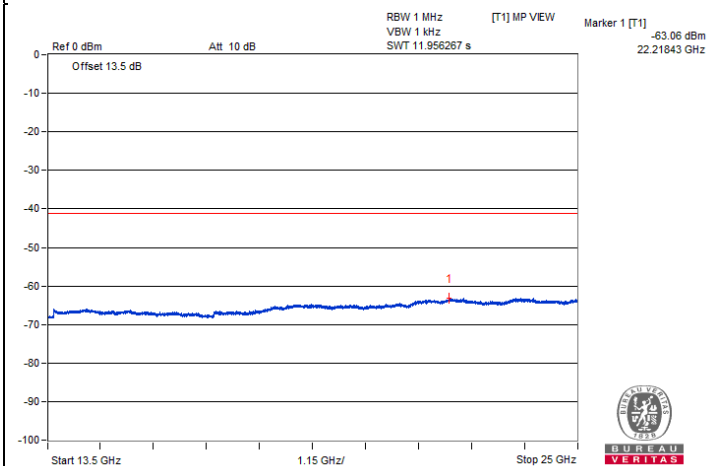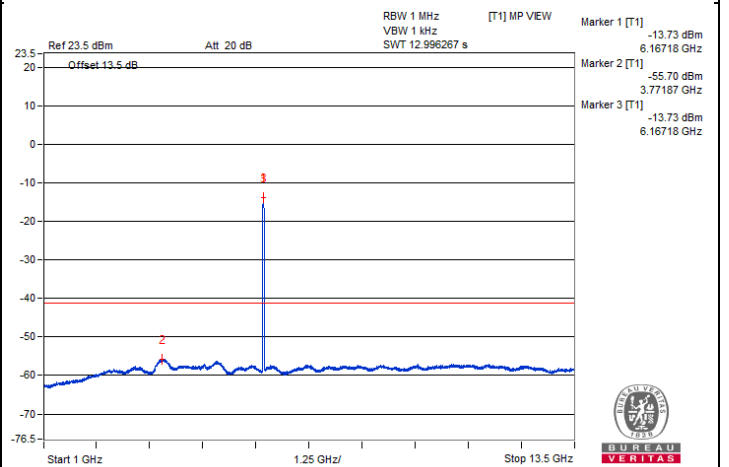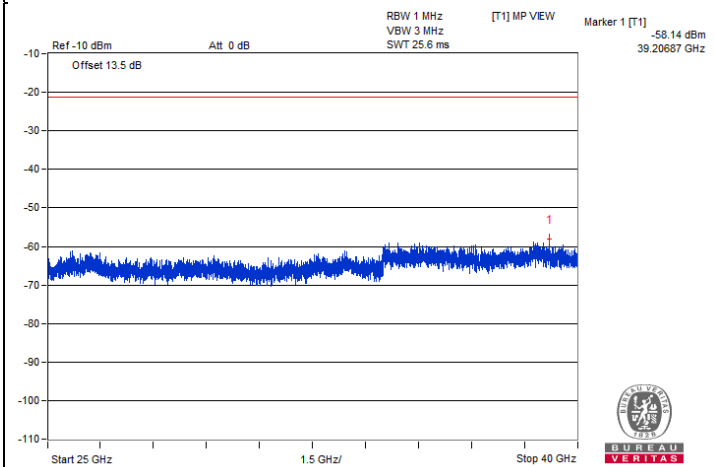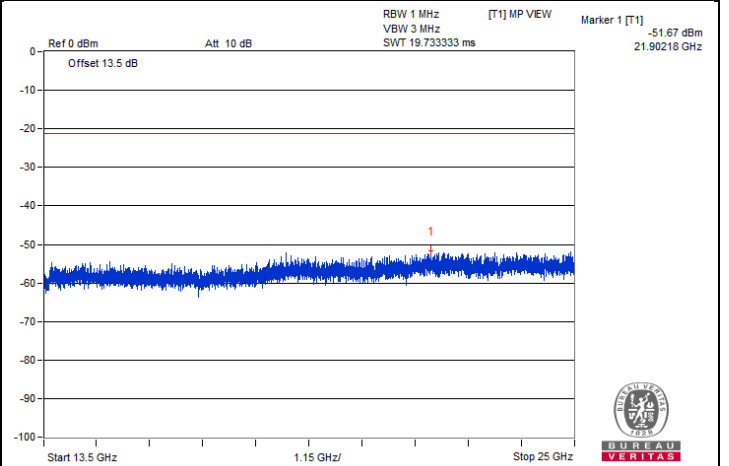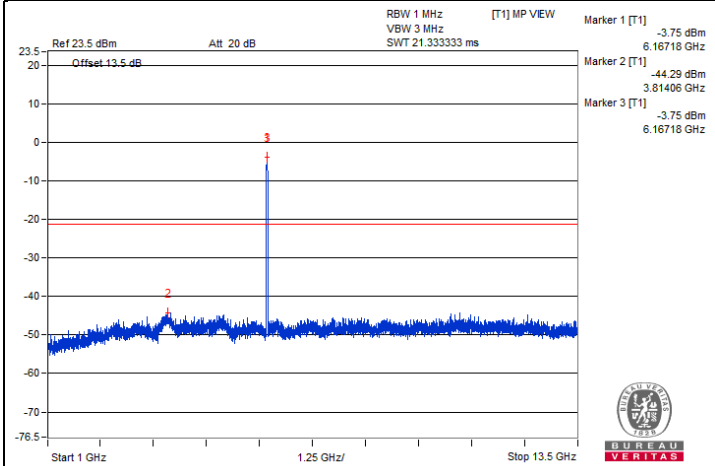





### Chain 1

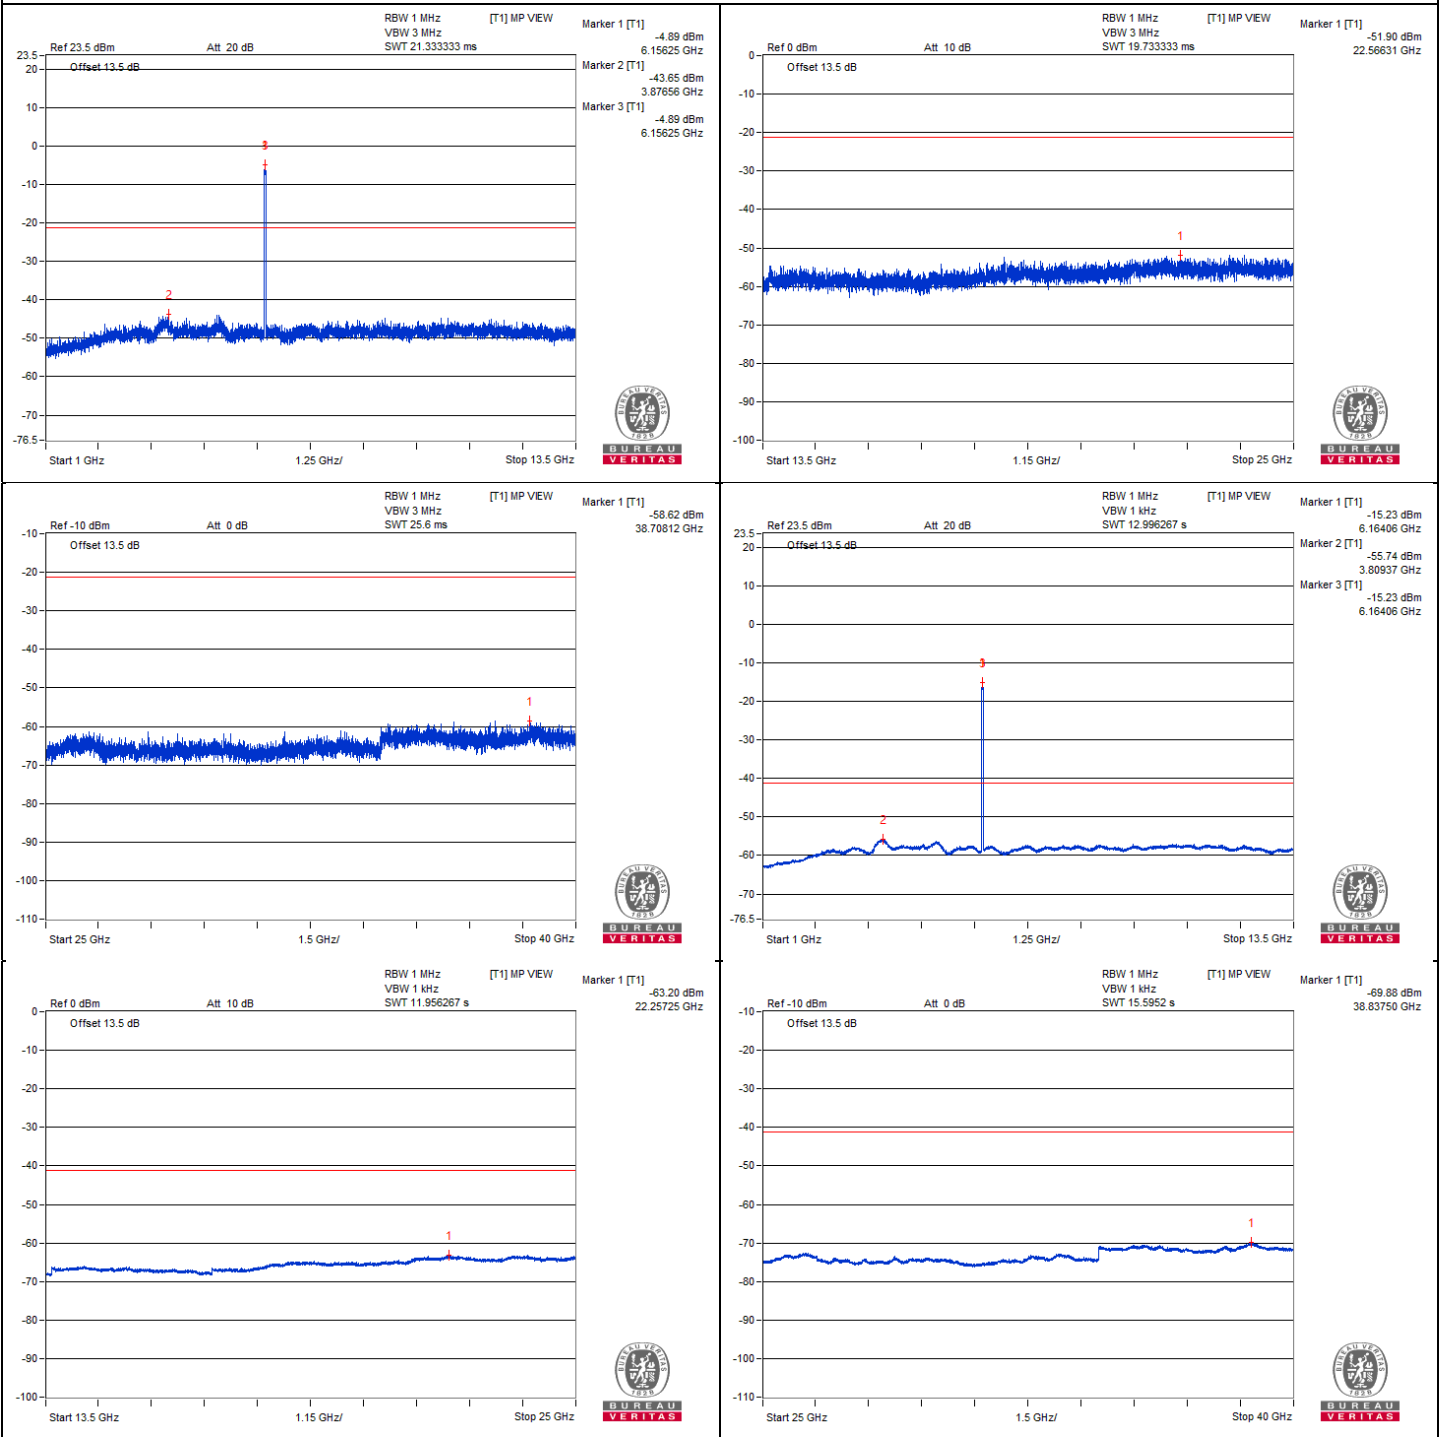

**802.11be (EHT40) - Channel 91**
**Conducted spurious emission table**







| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #12803.12       | 58.88 PK                | 88.2           | -29.32      | -47.19          | -47.97 | 8.17                   | -36.38           |
| 2   | #12800          | 47.94 AV                | 68.2           | -20.26      | -58.42          | -58.59 | 8.17                   | -47.32           |
| 3   | 19216.93        | 51.29 PK                | 74             | -22.71      | -57.52          | -53.63 | 8.17                   | -43.97           |
| 4   | 19212.62        | 41.35 AV                | 54             | -12.65      | -65.12          | -65.06 | 8.17                   | -53.91           |

**Remarks:**

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




### Chain 0

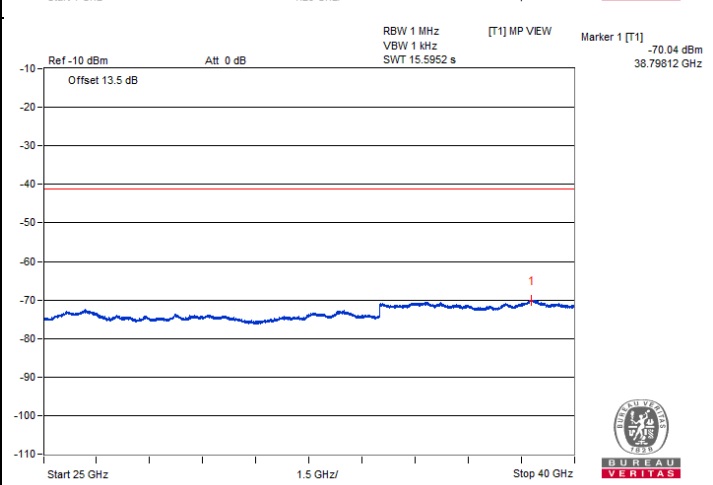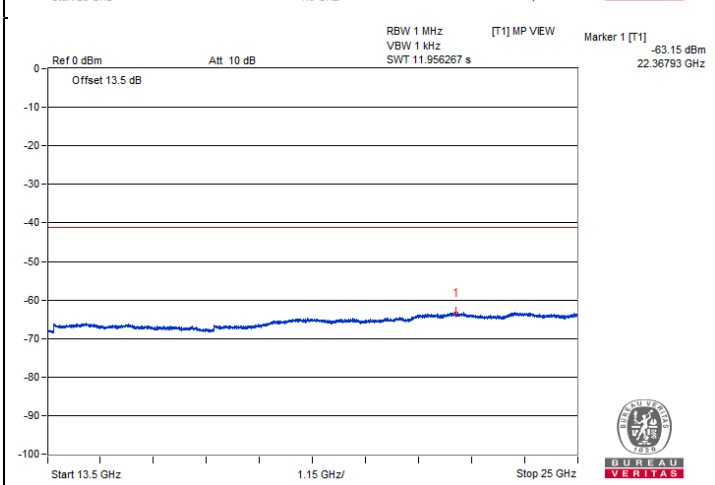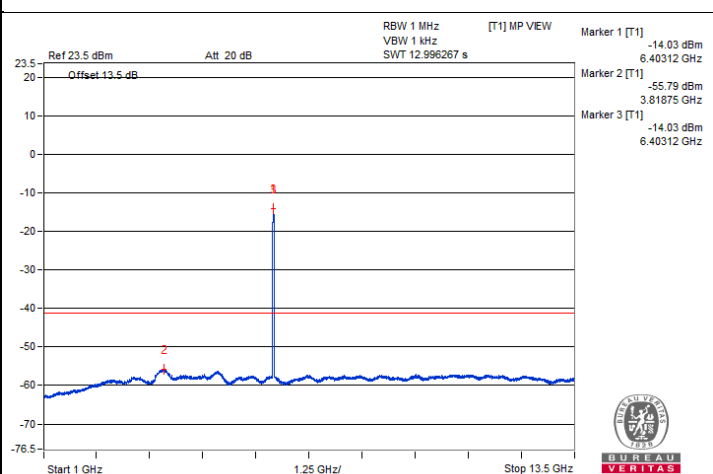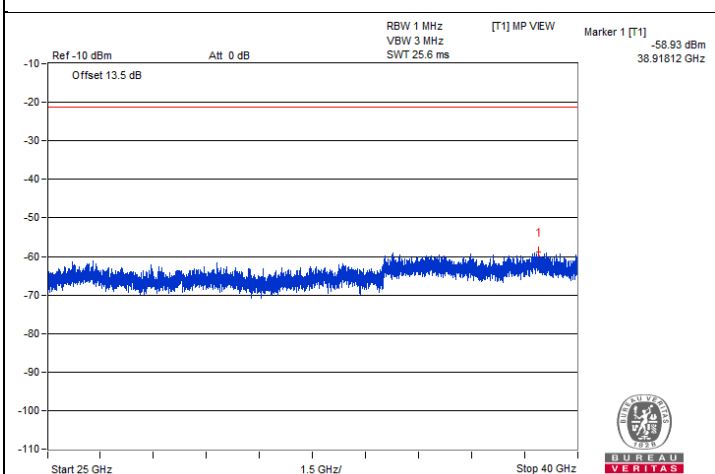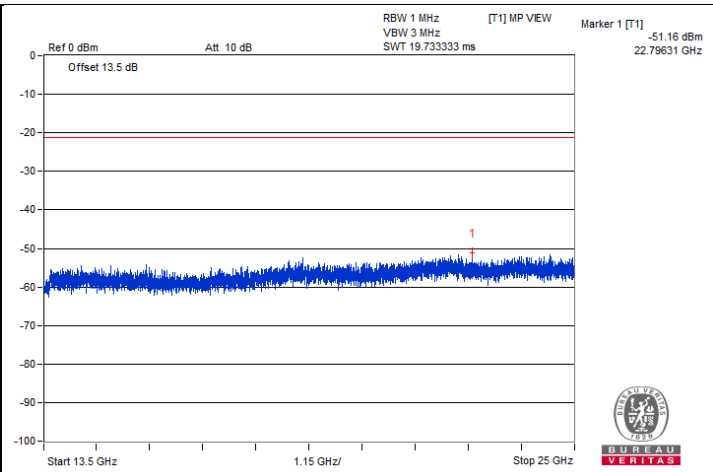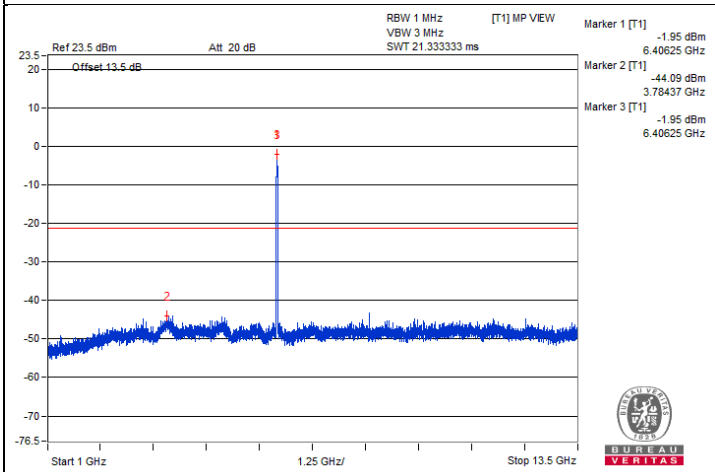



BUREAU  
VERITAS

### Chain 1

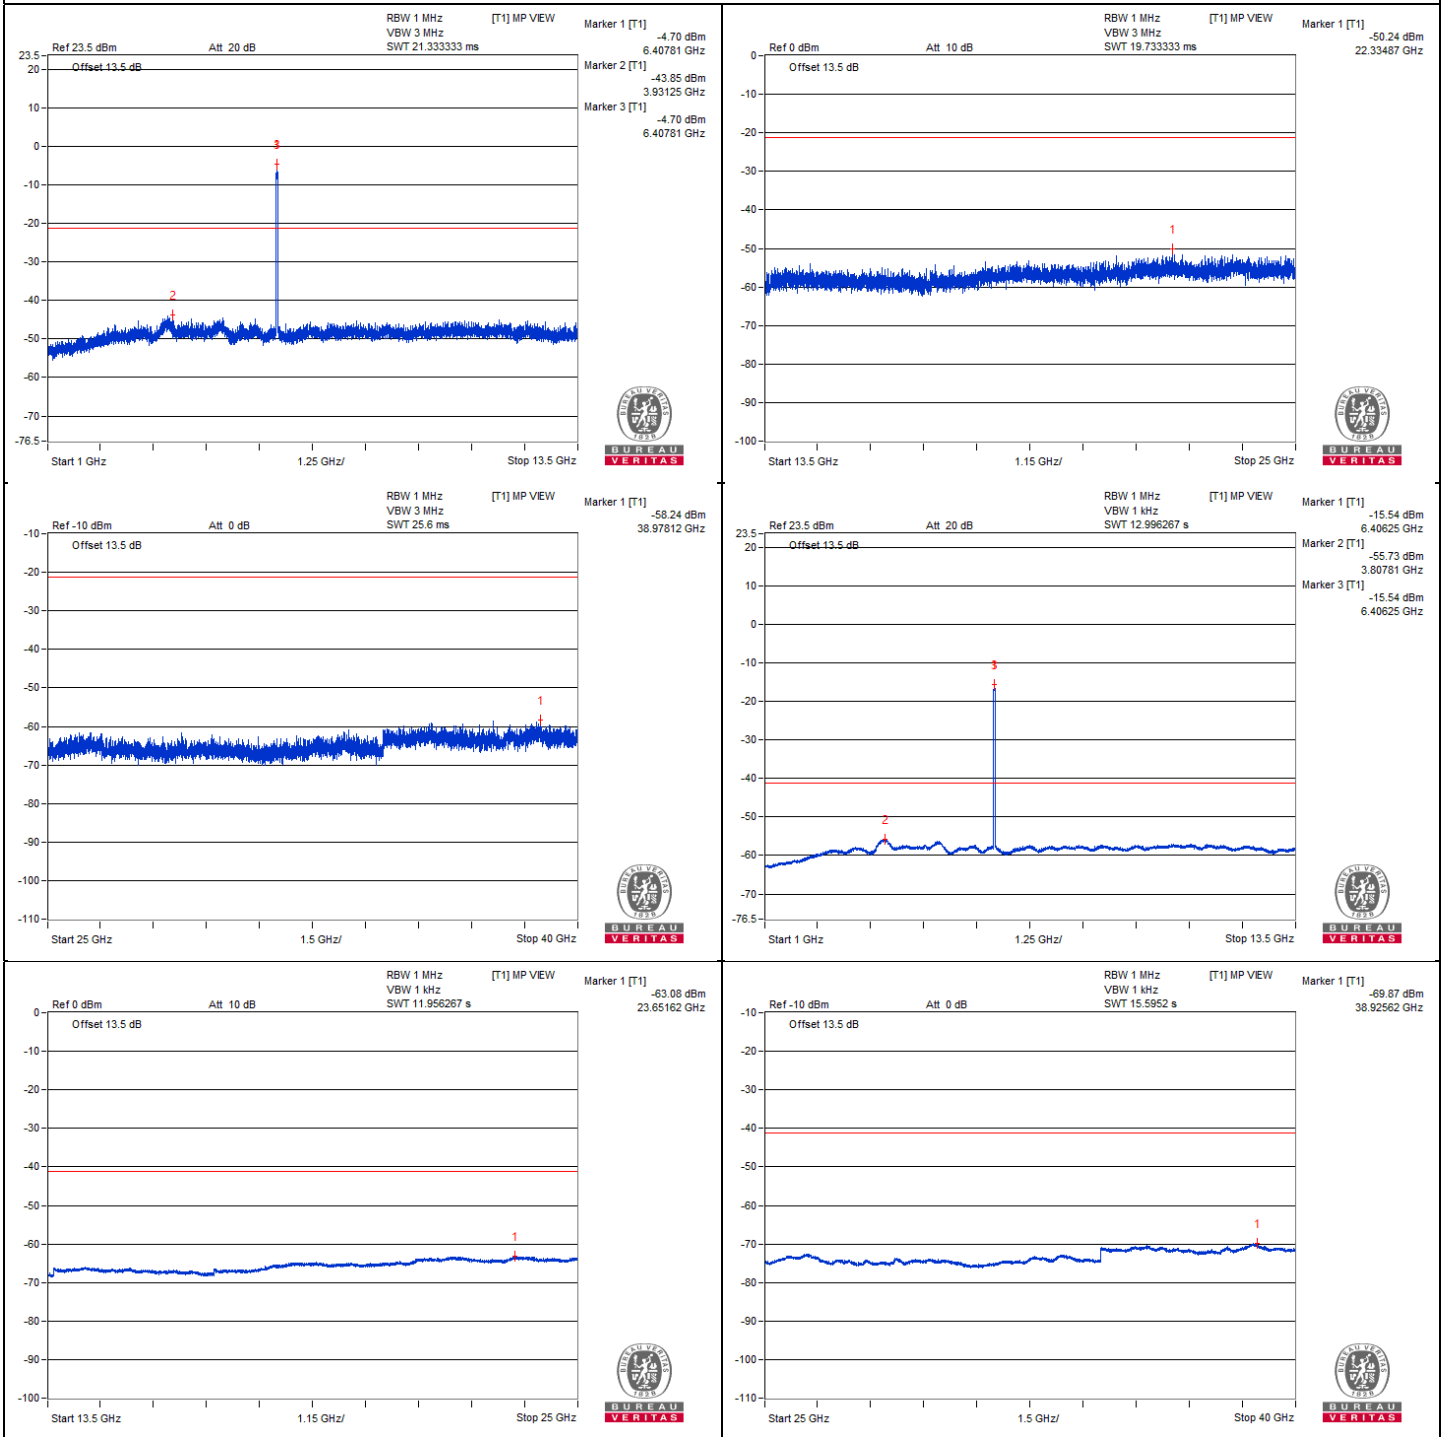

### 802.11be (EHT40) - Channel 99

#### Conducted spurious emission table


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #12882.81       | 58.32 PK                | 88.2           | -29.88      | -49.72          | -46.95 | 8.17                   | -36.94           |
| 2   | #12881.25       | 47.87 AV                | 68.2           | -20.33      | -58.47          | -58.68 | 8.17                   | -47.39           |
| 3   | 19343.43        | 50.59 PK                | 74             | -23.41      | -56.36          | -55.39 | 8.17                   | -44.67           |
| 4   | 19337.68        | 41.25 AV                | 54             | -12.75      | -65.14          | -65.24 | 8.17                   | -54.01           |

#### Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




### Chain 0

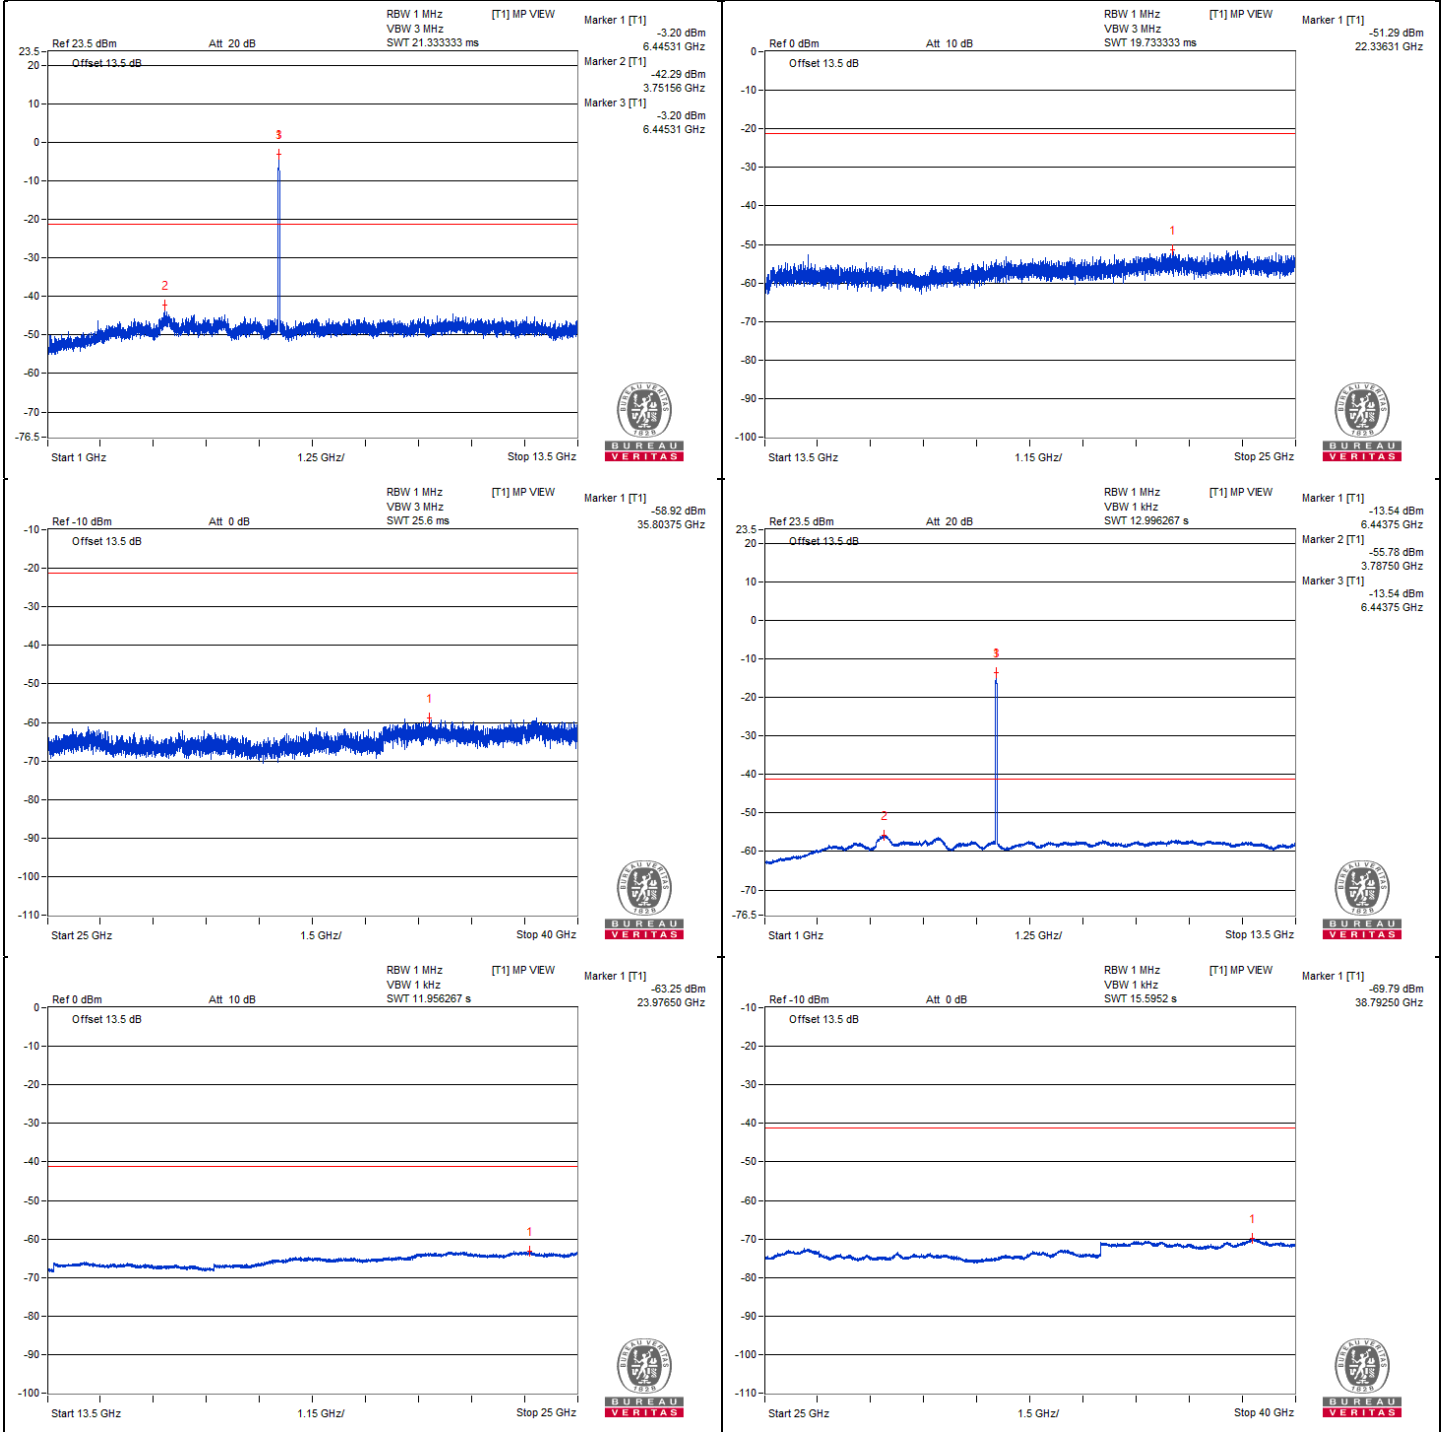



### Chain 1

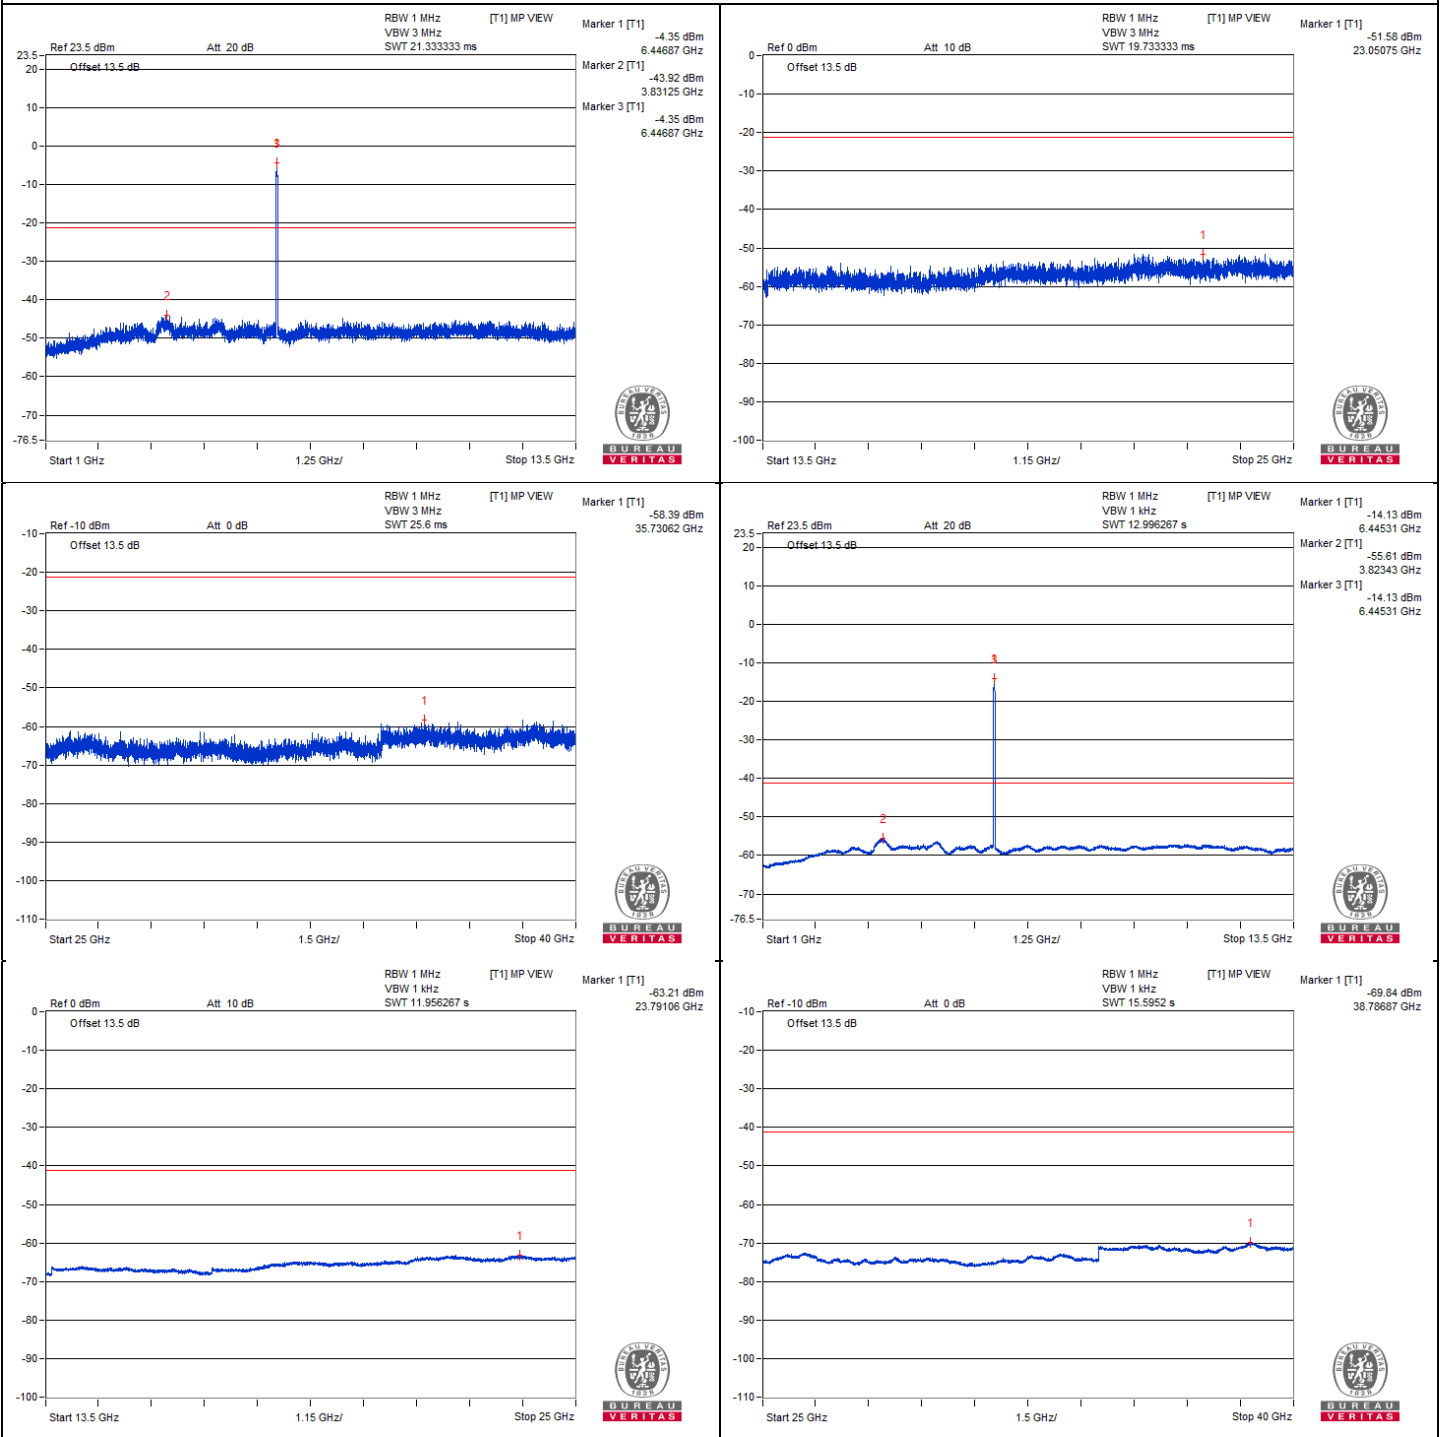

### 802.11be (EHT40) - Channel 107

#### Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #12978.12       | 58.19 PK                | 88.2           | -30.01      | -48.73          | -47.81 | 8.17                   | -37.07           |
| 2   | #12973.43       | 47.41 AV                | 68.2           | -20.79      | -59.01          | -59.05 | 8.17                   | -47.85           |
| 3   | 19459.87        | 51.31 PK                | 74             | -22.69      | -56.52          | -54.08 | 8.17                   | -43.95           |
| 4   | 19454.12        | 41.18 AV                | 54             | -12.82      | -65.21          | -65.32 | 8.17                   | -54.08           |







Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.






### Chain 0

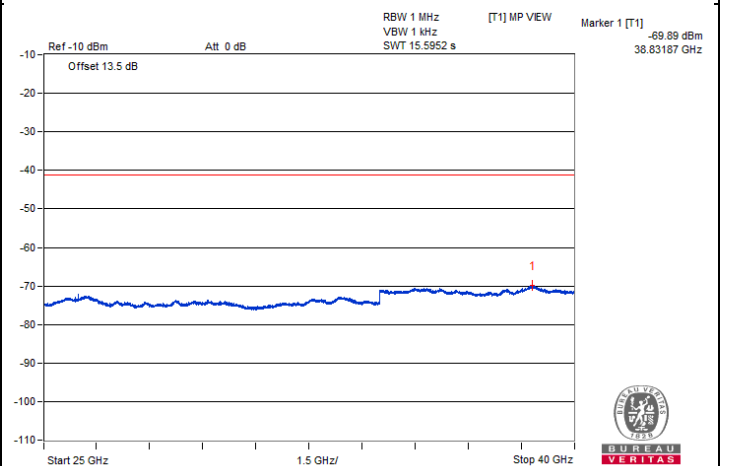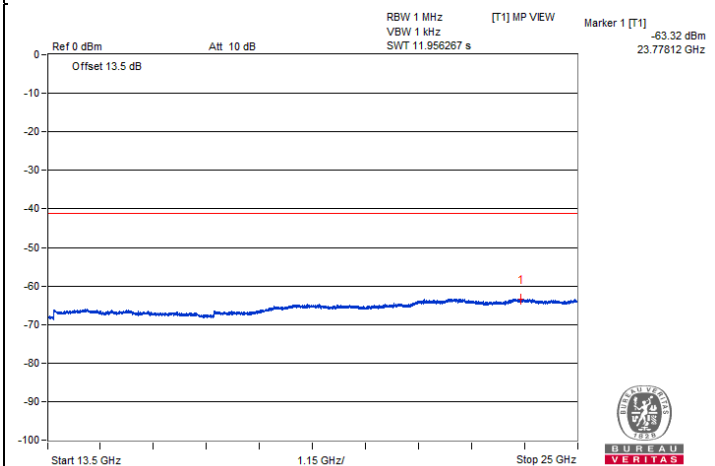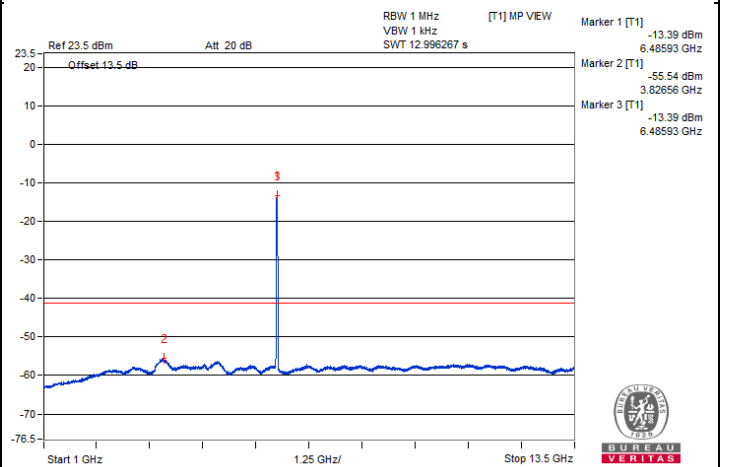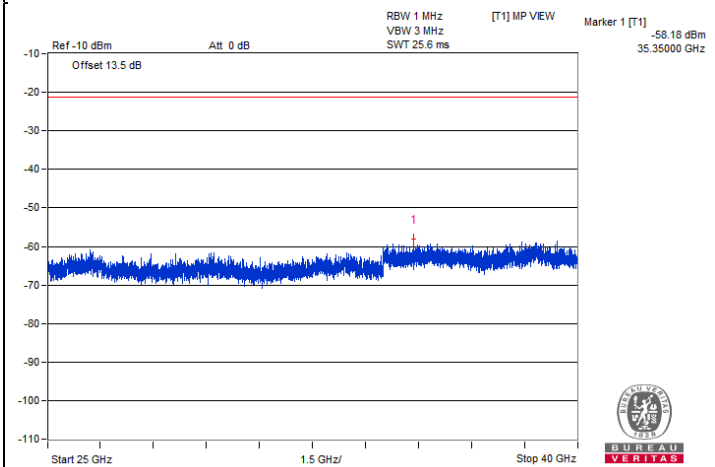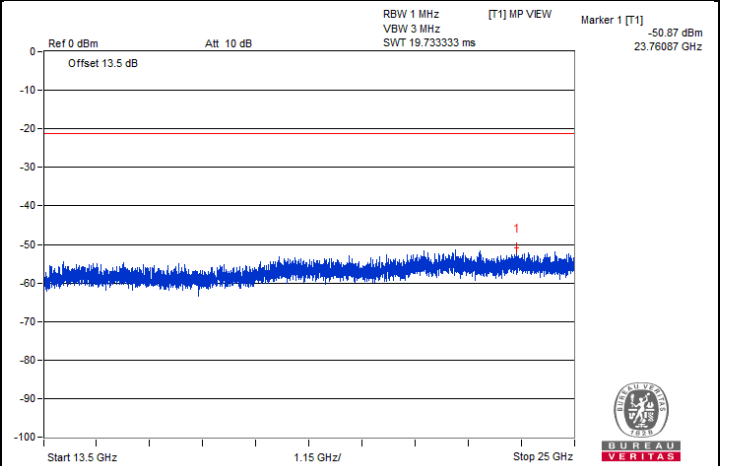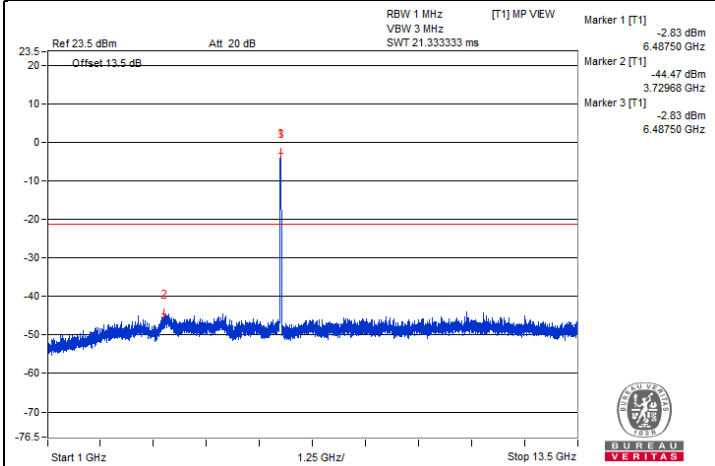



### Chain 1

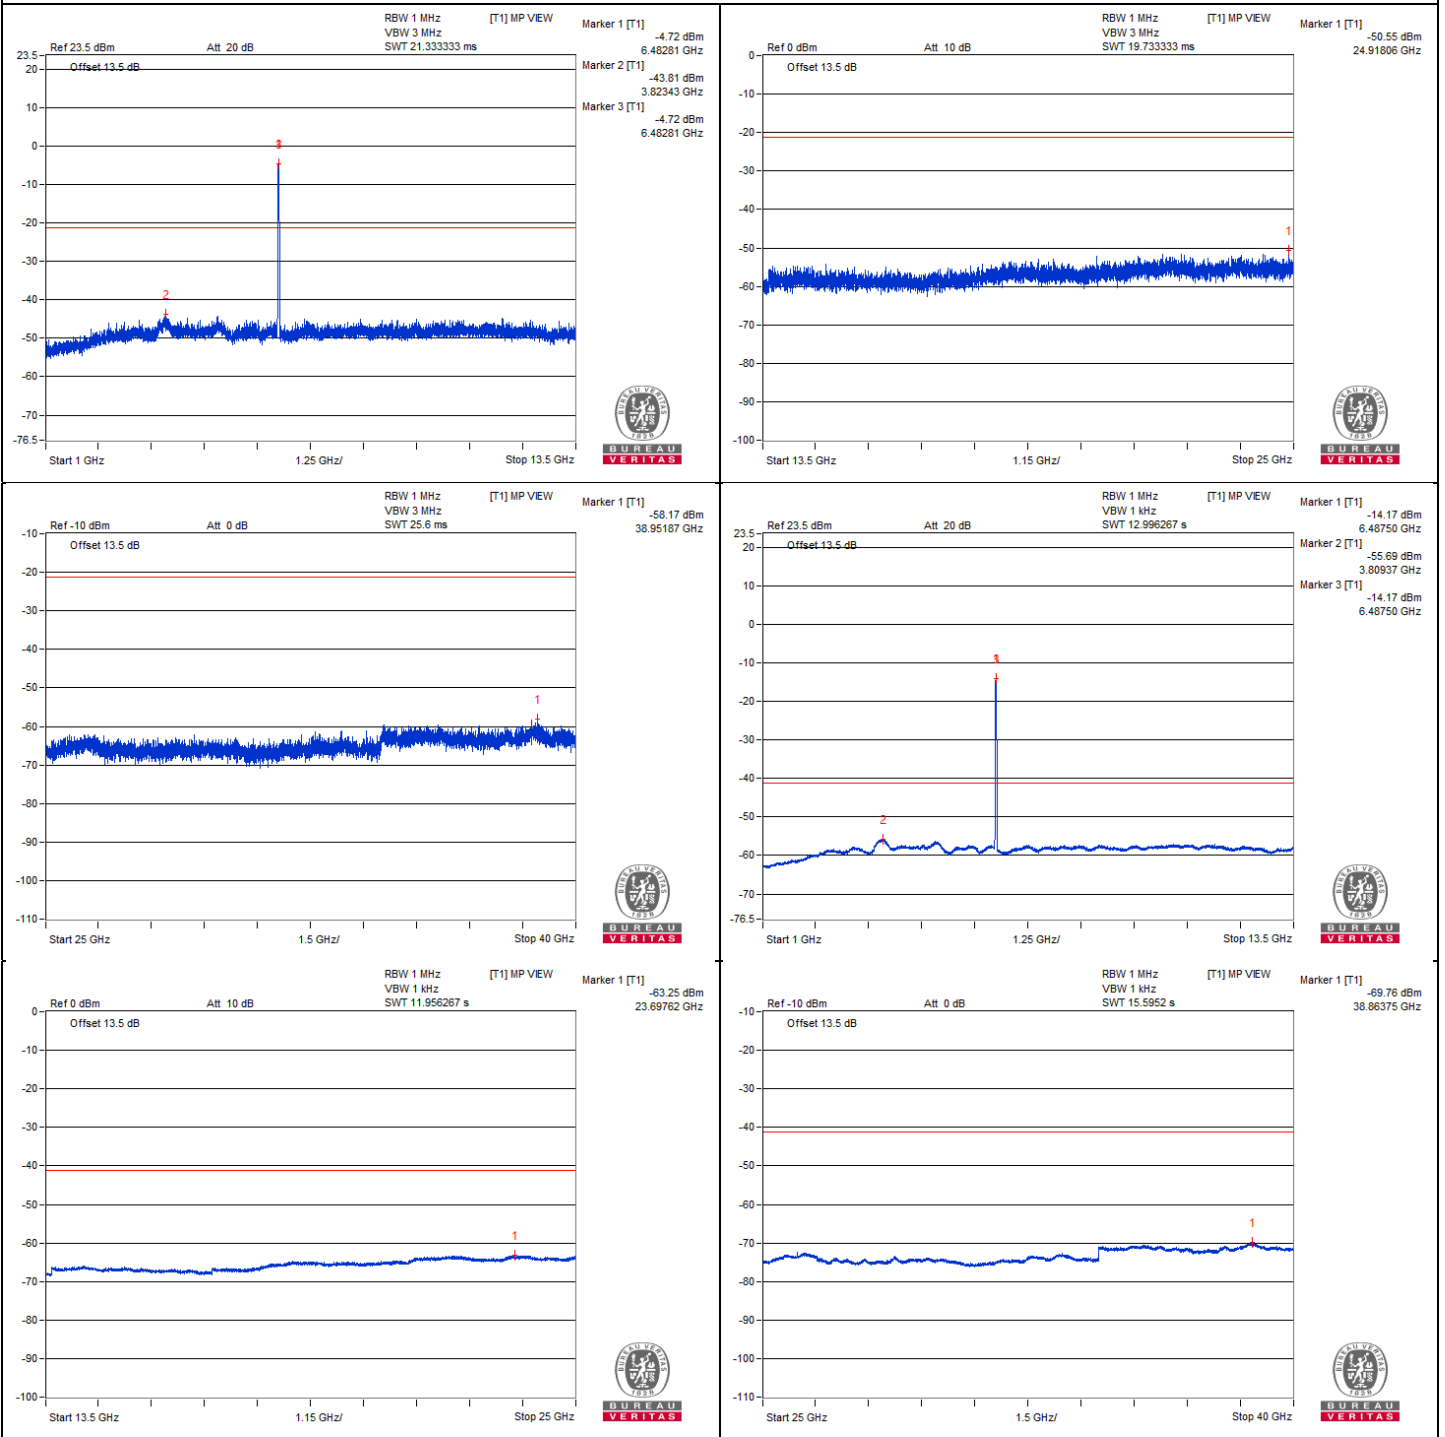

### 802.11be (EHT40) - Channel 115

#### Conducted spurious emission table


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #13046.87       | 58.31 PK                | 88.2           | -29.89      | -48.59          | -47.71 | 8.17                   | -36.95           |
| 2   | #13050          | 47.49 AV                | 68.2           | -20.71      | -58.82          | -59.08 | 8.17                   | -47.77           |
| 3   | 19569.12        | 49.9 PK                 | 74             | -24.1       | -56.24          | -56.87 | 8.17                   | -45.36           |
| 4   | 19566.25        | 41.05 AV                | 54             | -12.95      | -65.47          | -65.32 | 8.17                   | -54.21           |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




### Chain 0

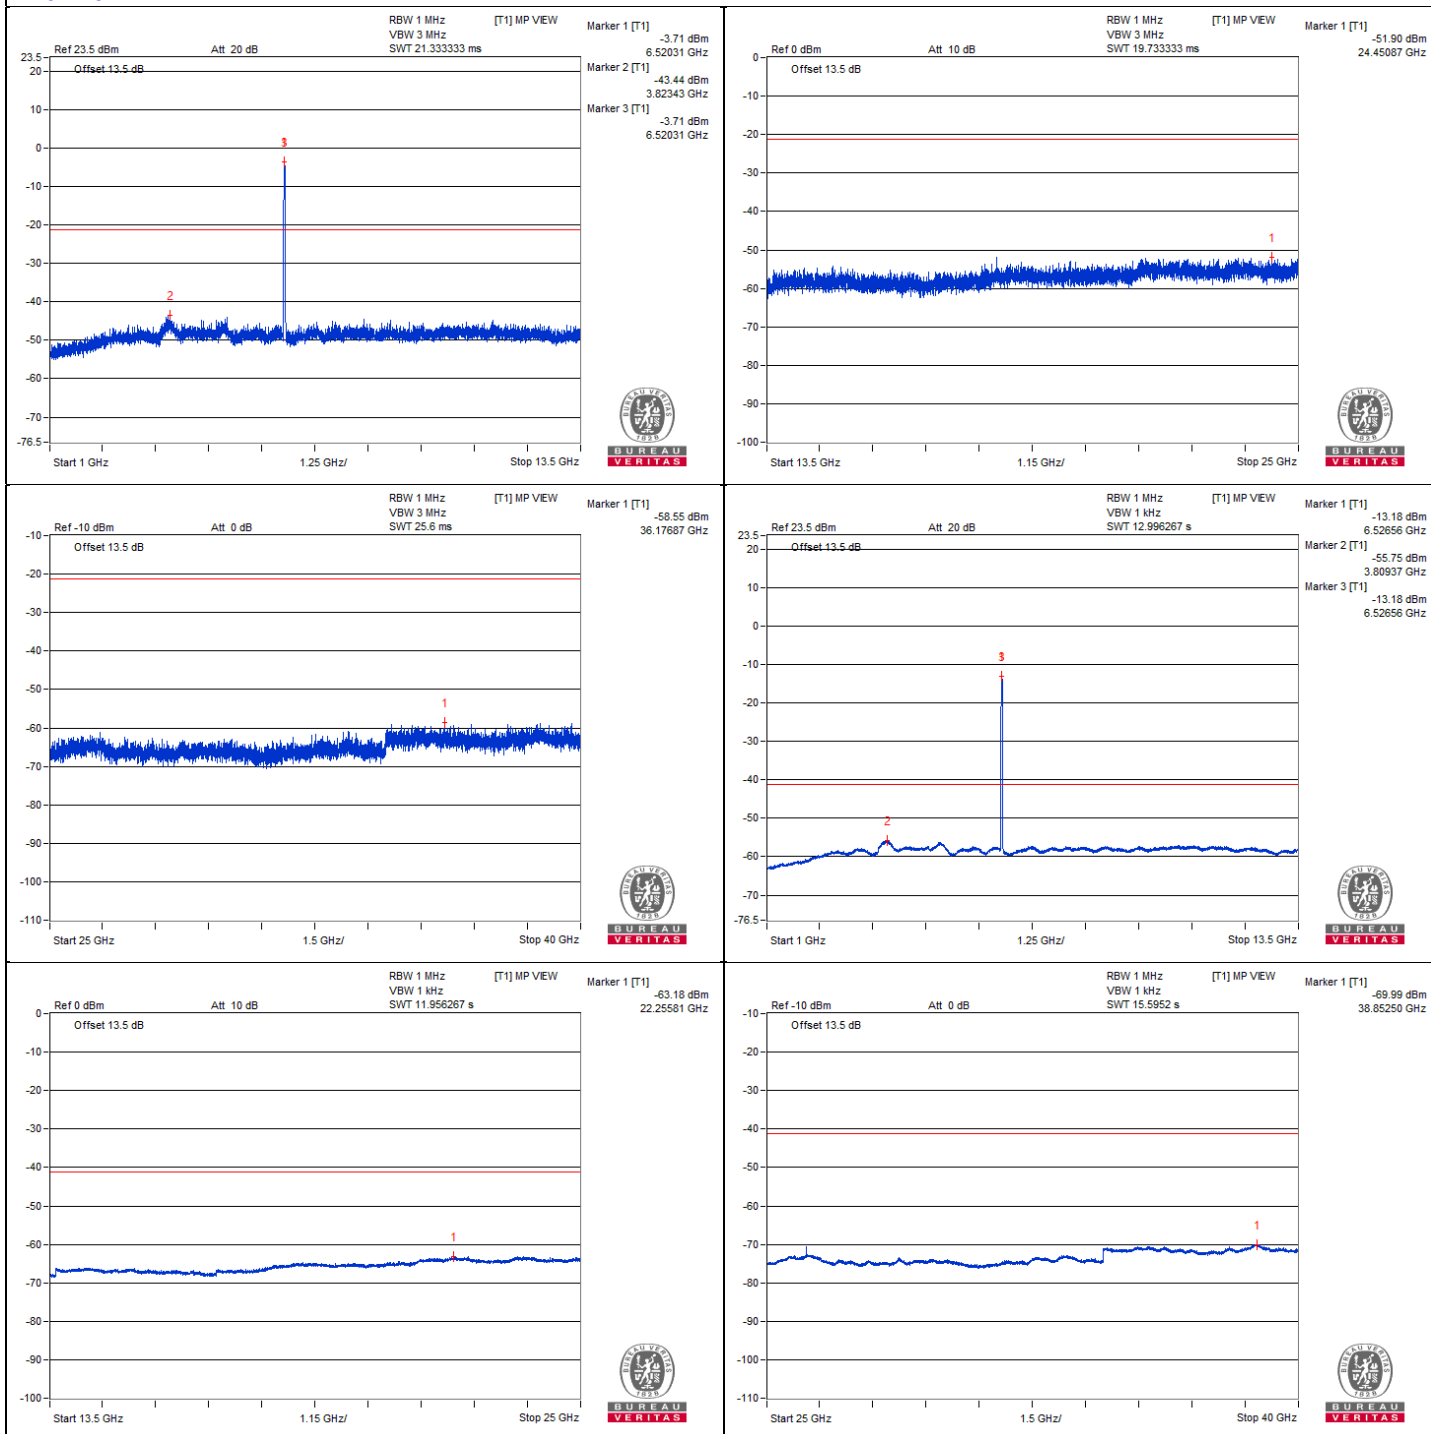



### Chain 1

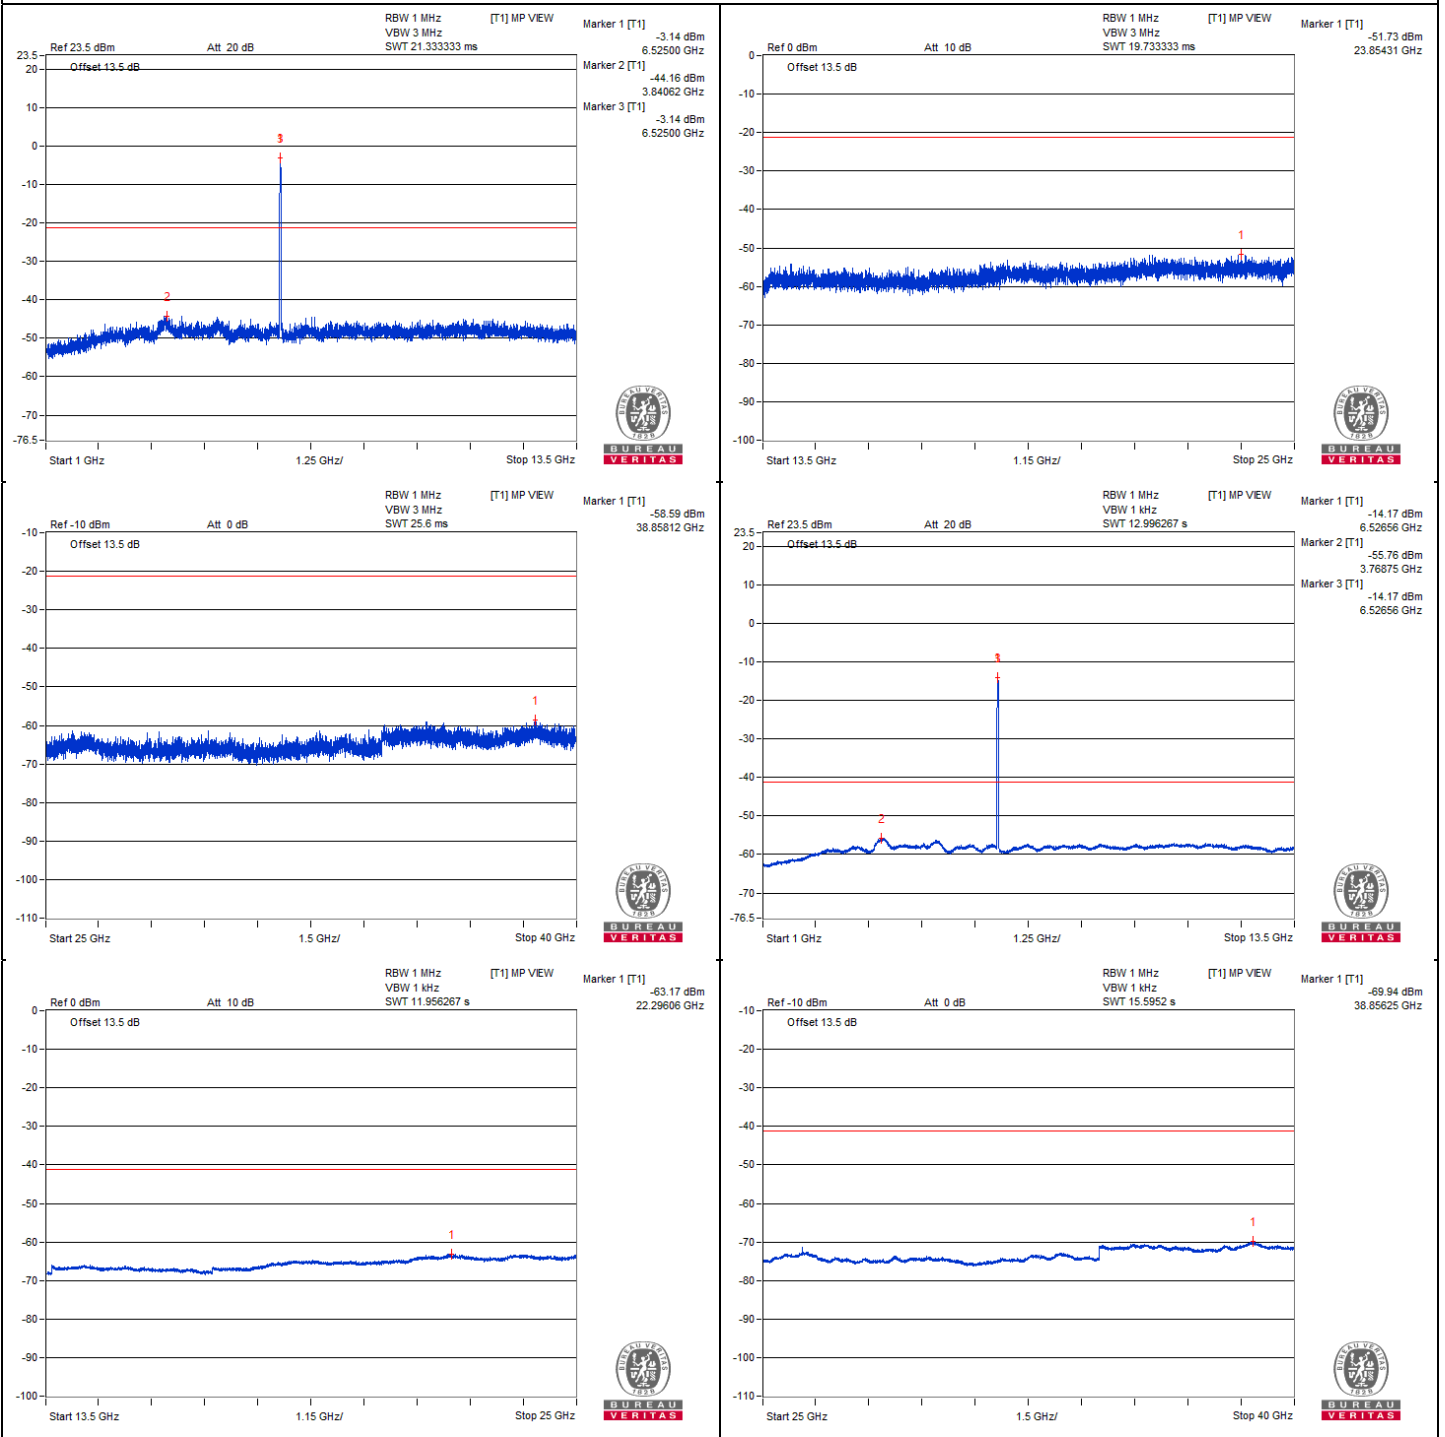

### 802.11be (EHT40) - Channel 123

#### Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #13128.12       | 59.26 PK                | 88.2           | -28.94      | -47.26          | -47.1  | 8.17                   | -36.00           |
| 2   | #13137.5        | 47.93 AV                | 68.2           | -20.27      | -58.35          | -58.67 | 8.17                   | -47.33           |
| 3   | 19704.25        | 50.43 PK                | 74             | -23.57      | -55.85          | -56.17 | 8.17                   | -44.83           |
| 4   | 19704.25        | 40.99 AV                | 54             | -13.01      | -65.38          | -65.53 | 8.17                   | -54.27           |







#### Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




BUREAU  
VERITAS

### Chain 0

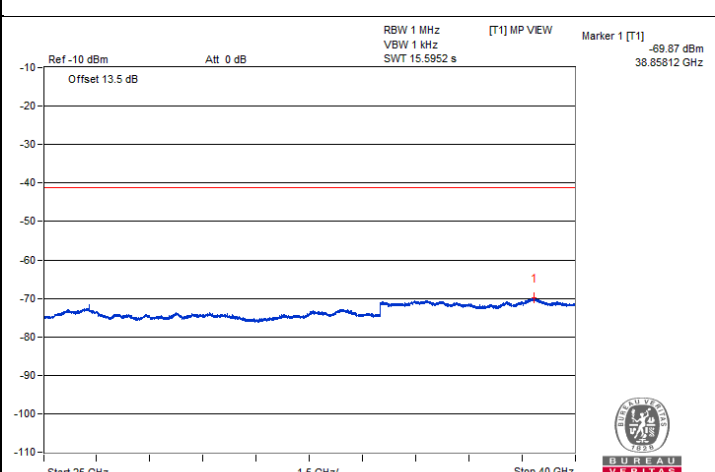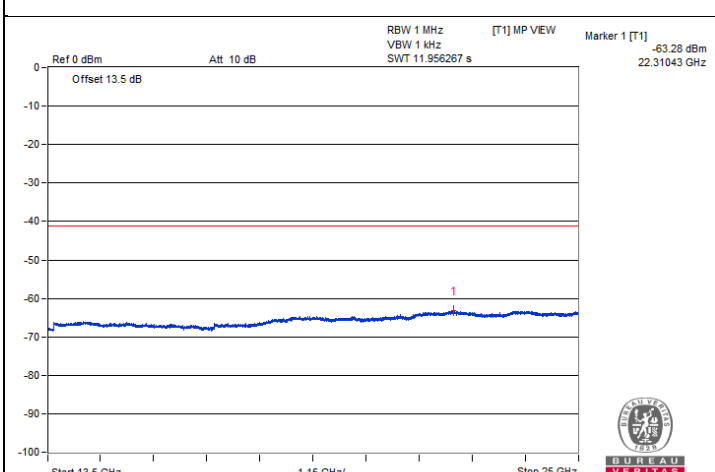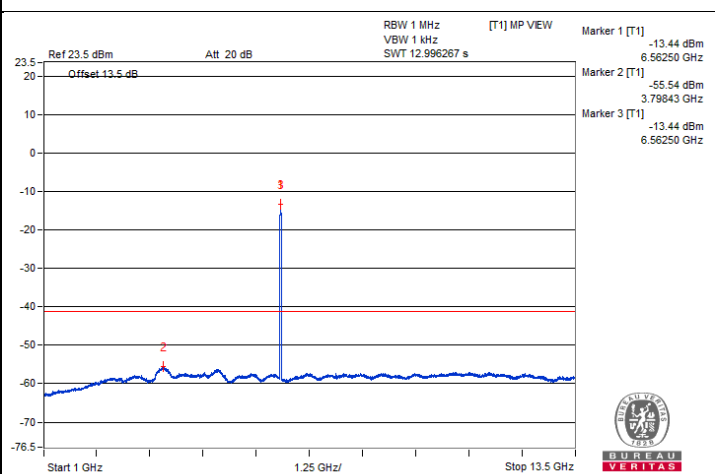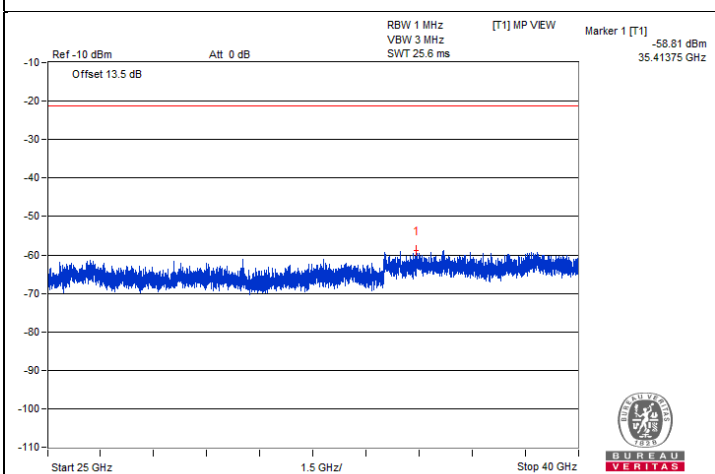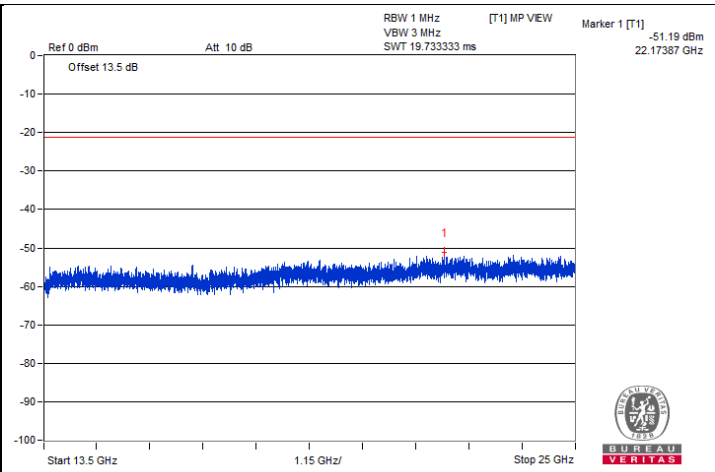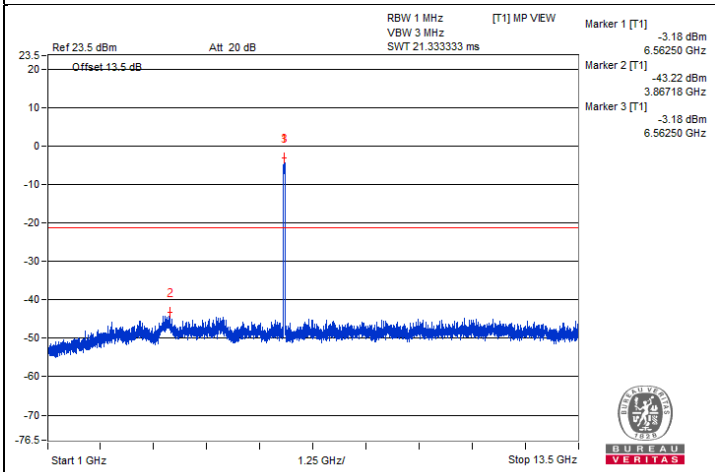



### Chain 1

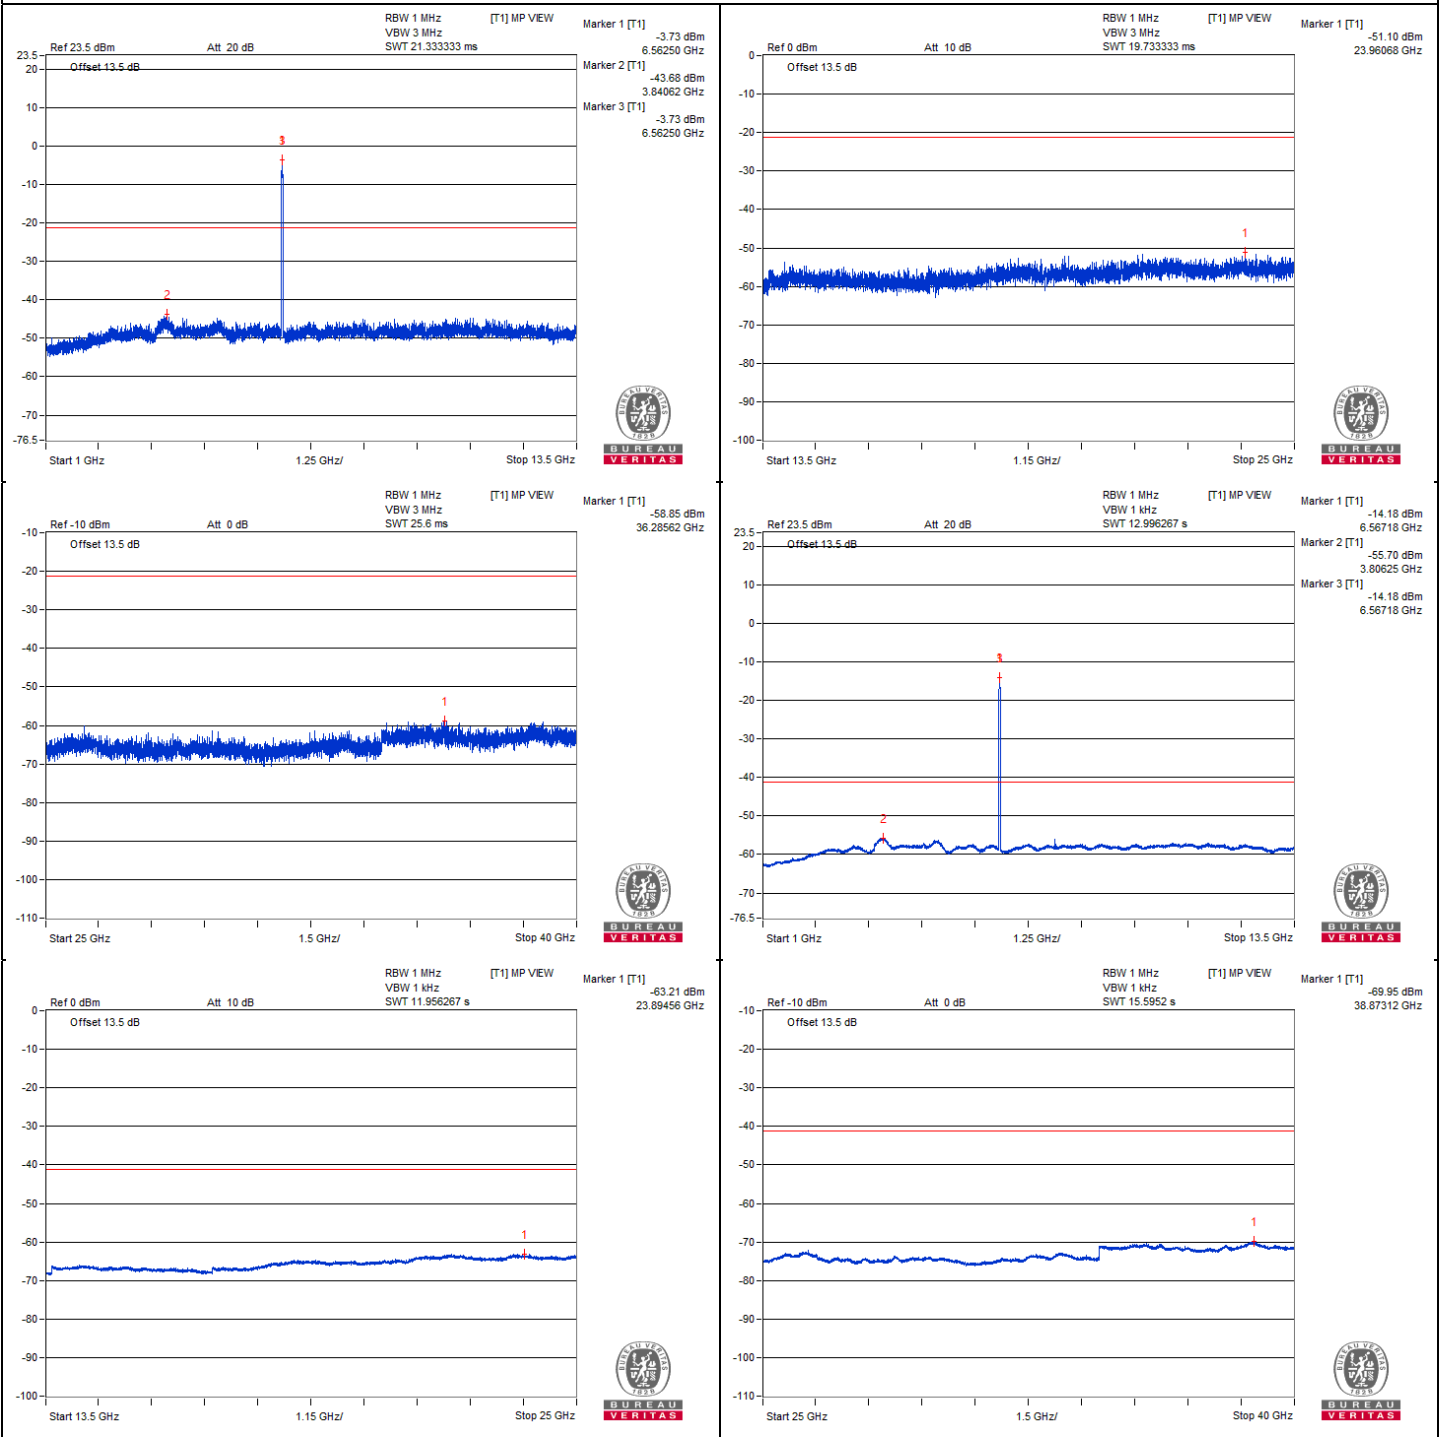



### 802.11be (EHT40) - Channel 155

#### Conducted spurious emission table


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #13453.12       | 58.86 PK                | 88.2           | -29.34      | -47.74          | -47.42 | 8.17                   | -36.40           |
| 2   | #13453.12       | 48.11 AV                | 68.2           | -20.09      | -58.25          | -58.41 | 8.17                   | -47.15           |
| 3   | 20178.62        | 50.48 PK                | 74             | -23.52      | -56.71          | -55.32 | 8.17                   | -44.78           |
| 4   | 20171.43        | 41.22 AV                | 54             | -12.78      | -65.16          | -65.28 | 8.17                   | -54.04           |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




### Chain 0

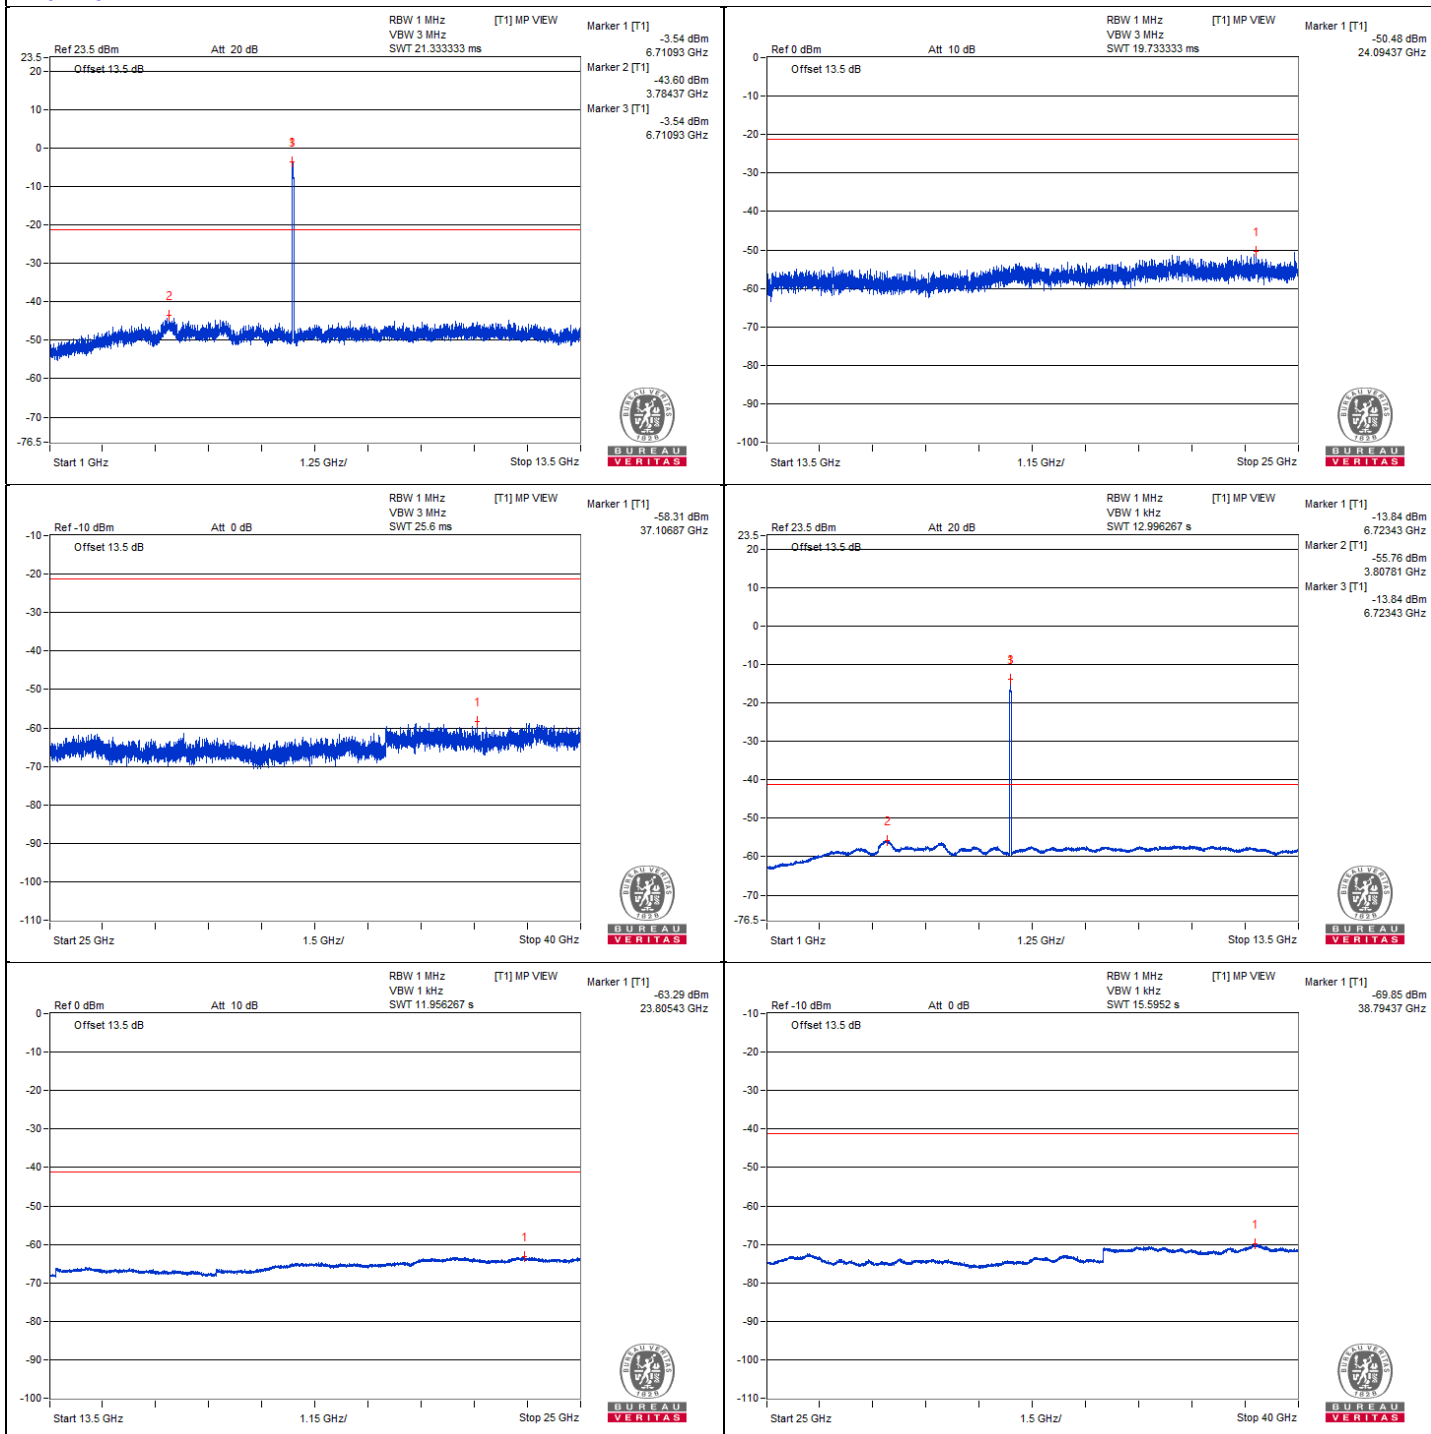



### Chain 1

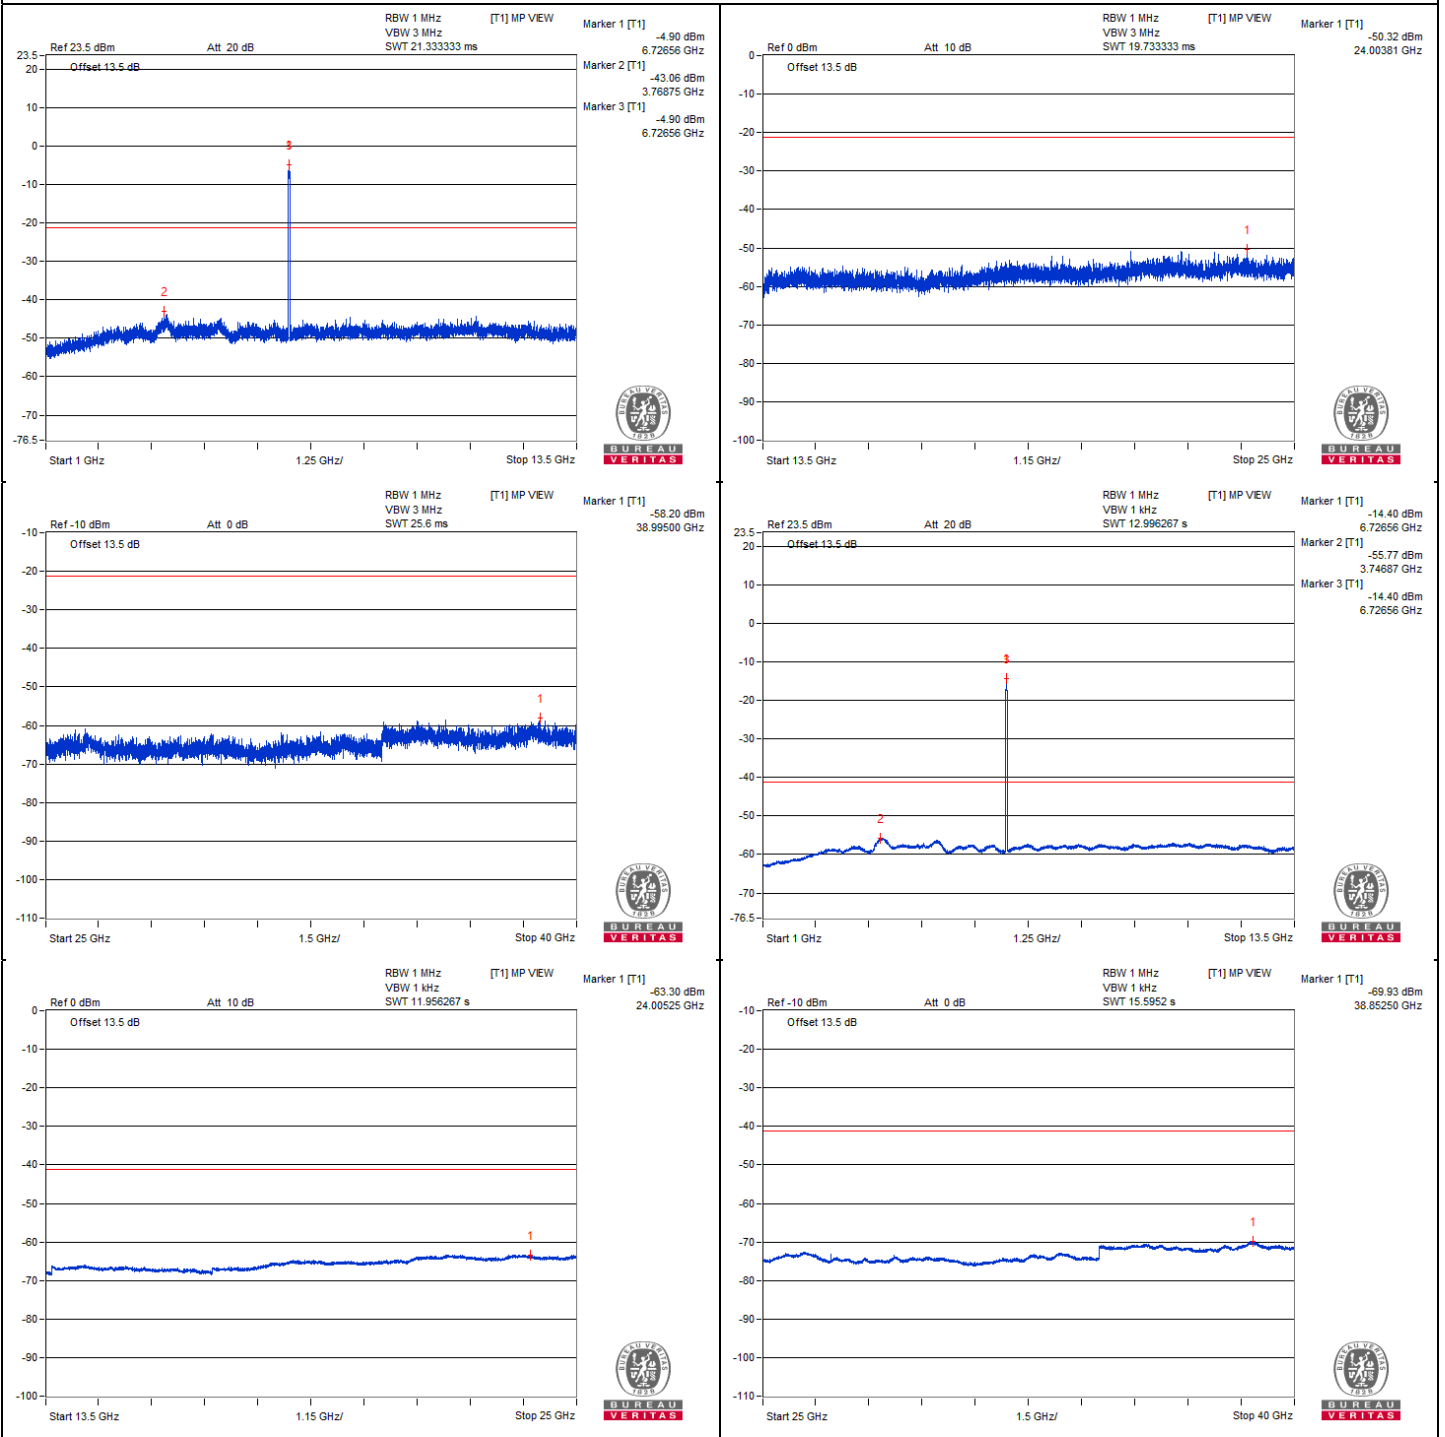

### 802.11be (EHT40) - Channel 179

#### Conducted spurious emission table


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #13681.12       | 49.82 PK                | 88.2           | -38.38      | -55.32          | -58.49 | 8.17                   | -45.44           |
| 2   | #13684          | 39.75 AV                | 68.2           | -28.45      | -66.84          | -66.54 | 8.17                   | -55.51           |
| 3   | 20538           | 51.81 PK                | 74             | -22.19      | -53.1           | -57.03 | 8.17                   | -43.45           |
| 4   | 20538           | 41.14 AV                | 54             | -12.86      | -65.35          | -65.26 | 8.17                   | -54.12           |

#### Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




### Chain 0

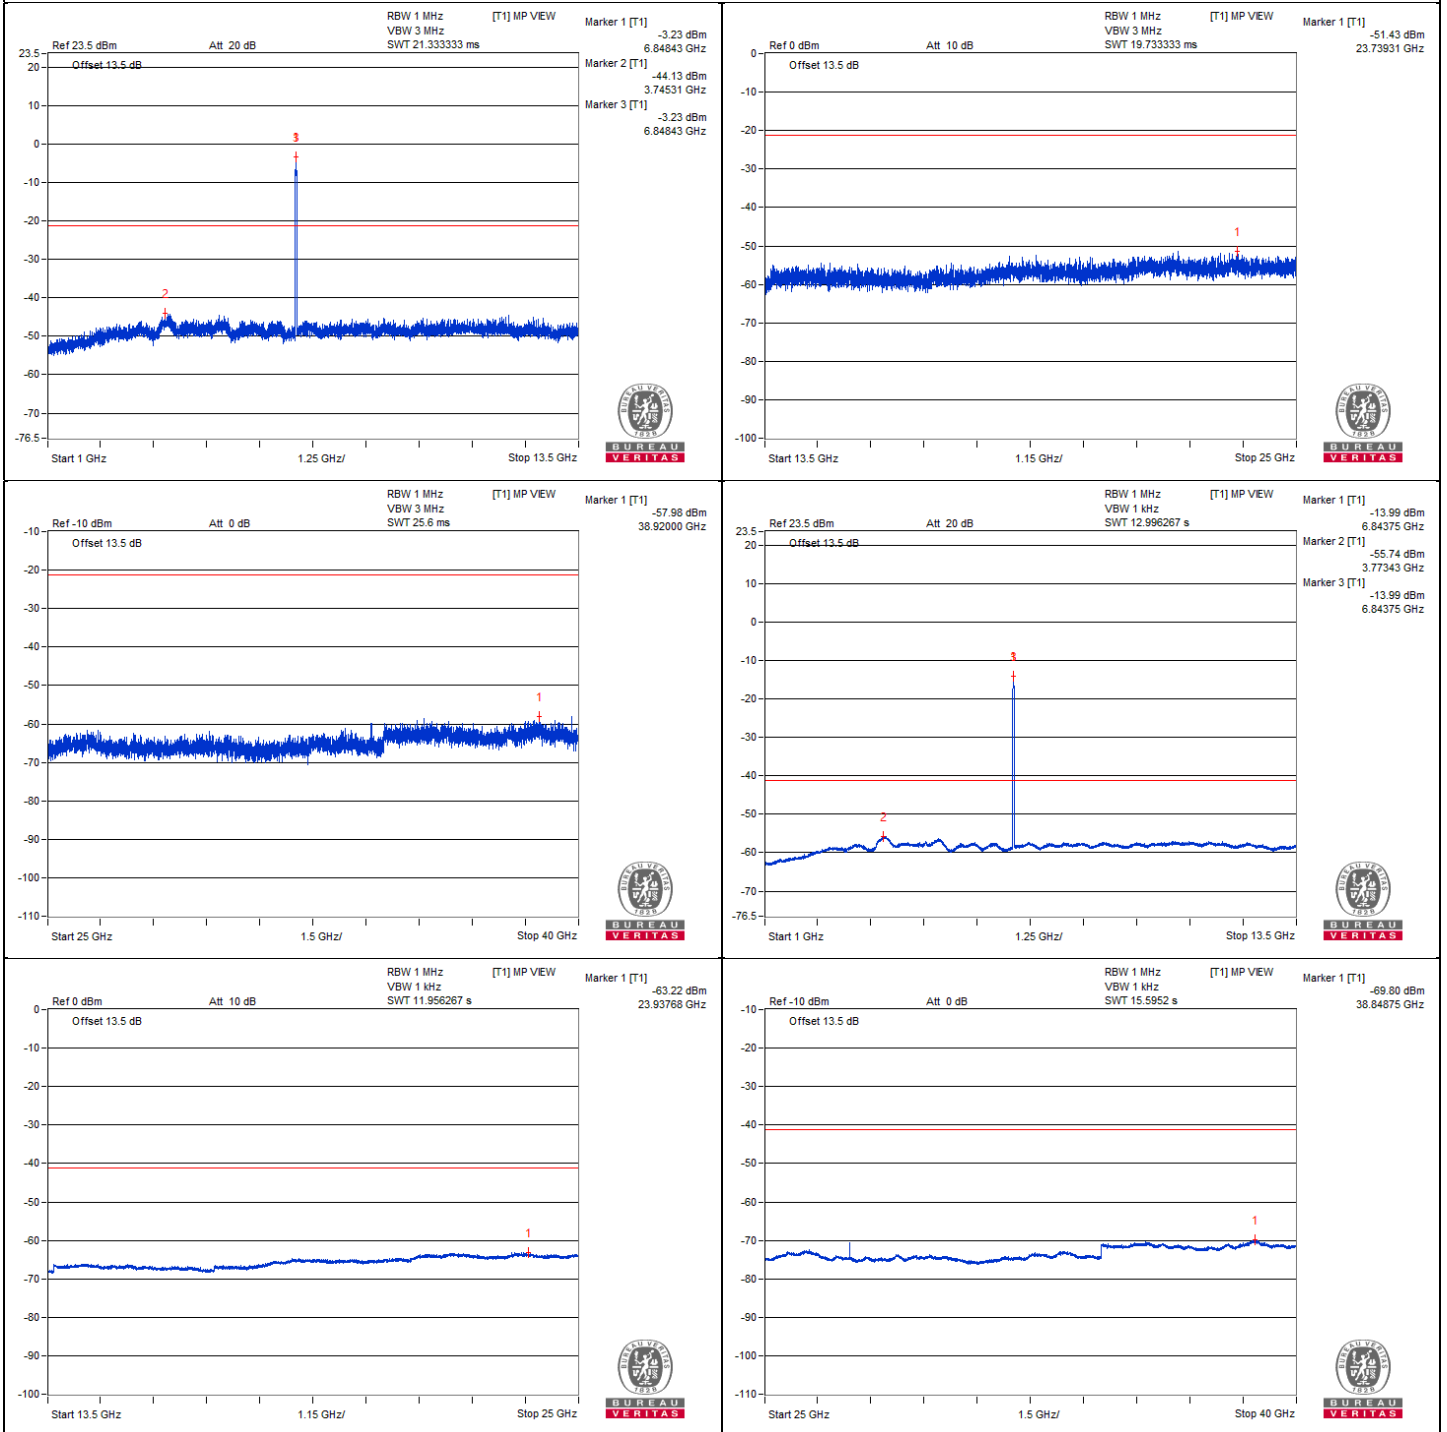



### Chain 1

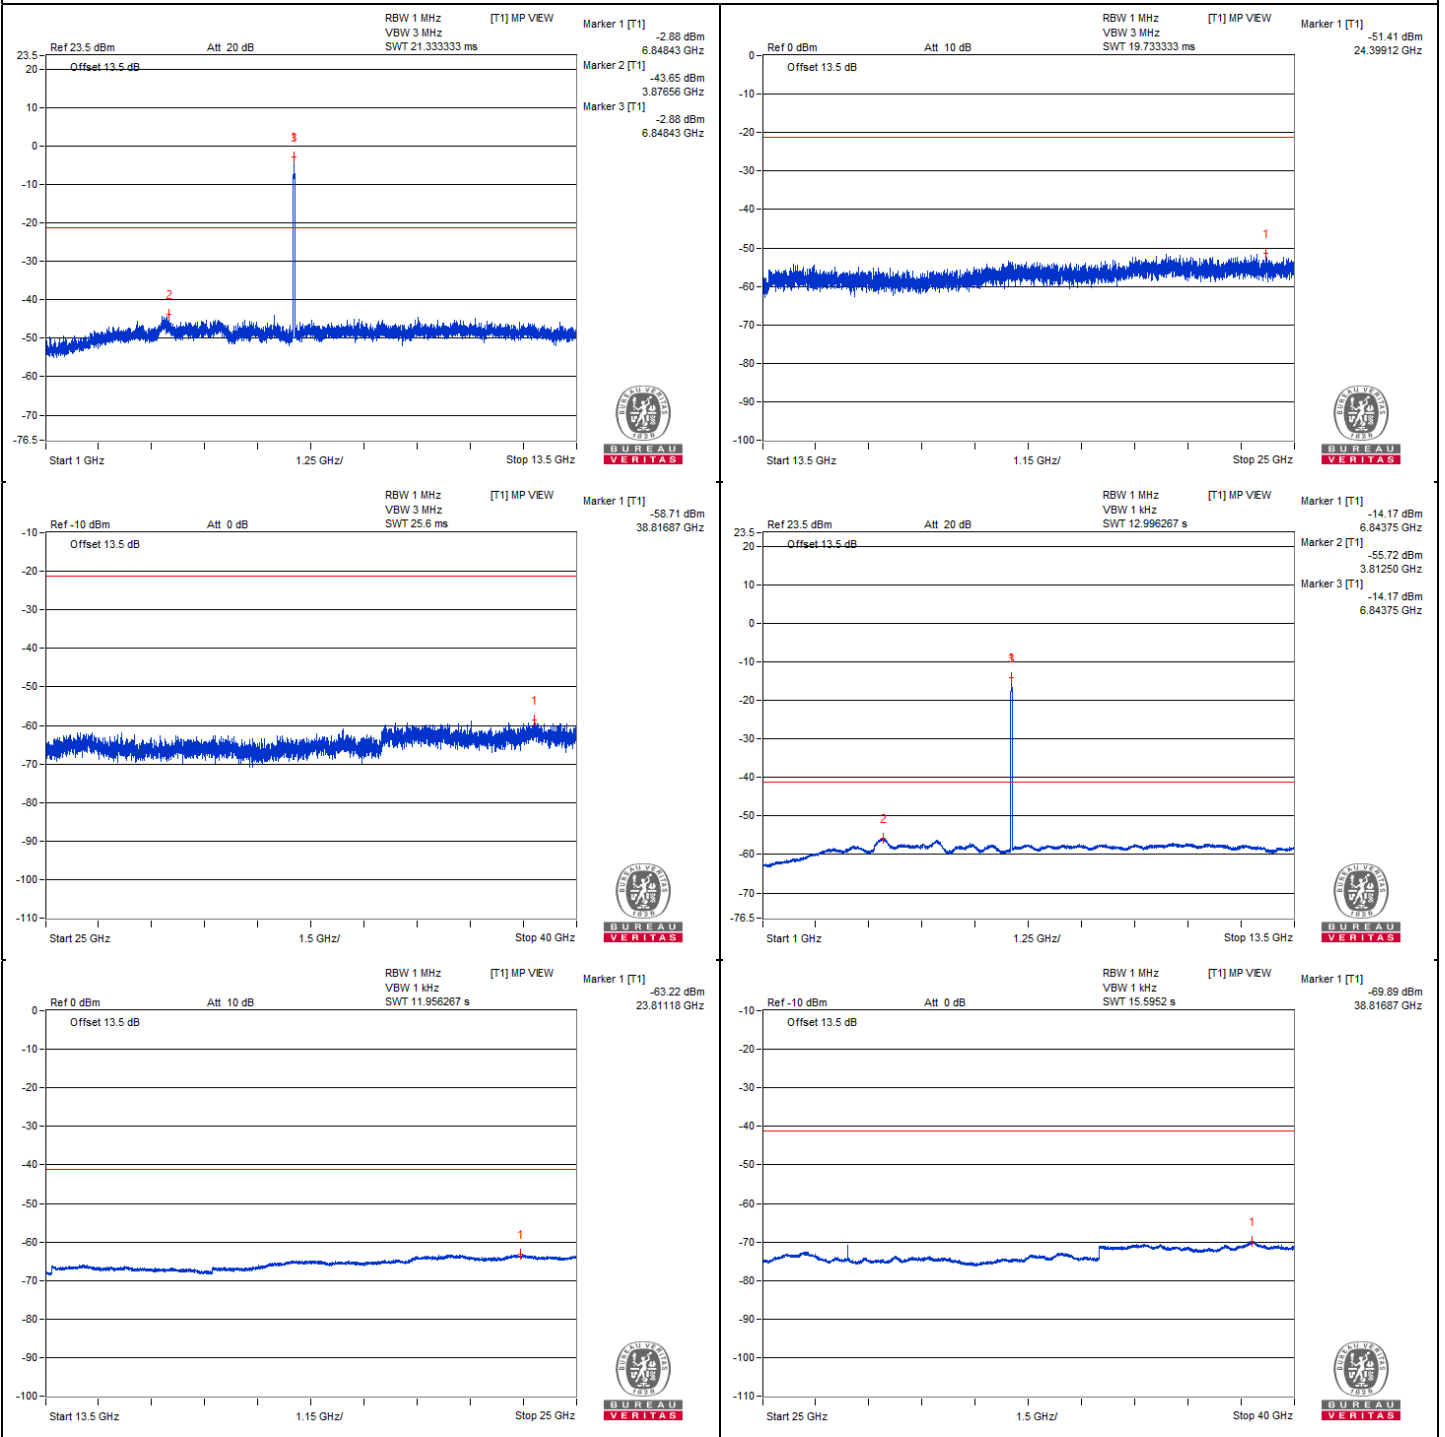

### 802.11be (EHT40) - Channel 187

#### Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #13774.56       | 49.86 PK                | 88.2           | -38.34      | -58.16          | -55.43 | 8.17                   | -45.40           |
| 2   | #13776          | 39.66 AV                | 68.2           | -28.54      | -66.67          | -66.9  | 8.17                   | -55.60           |
| 3   | 20653           | 50.41 PK                | 74             | -23.59      | -57.27          | -55.07 | 8.17                   | -44.85           |
| 4   | 20651.56        | 41.09 AV                | 54             | -12.91      | -65.39          | -65.31 | 8.17                   | -54.17           |


#### Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.



BUREAU  
VERITAS


### Chain 0

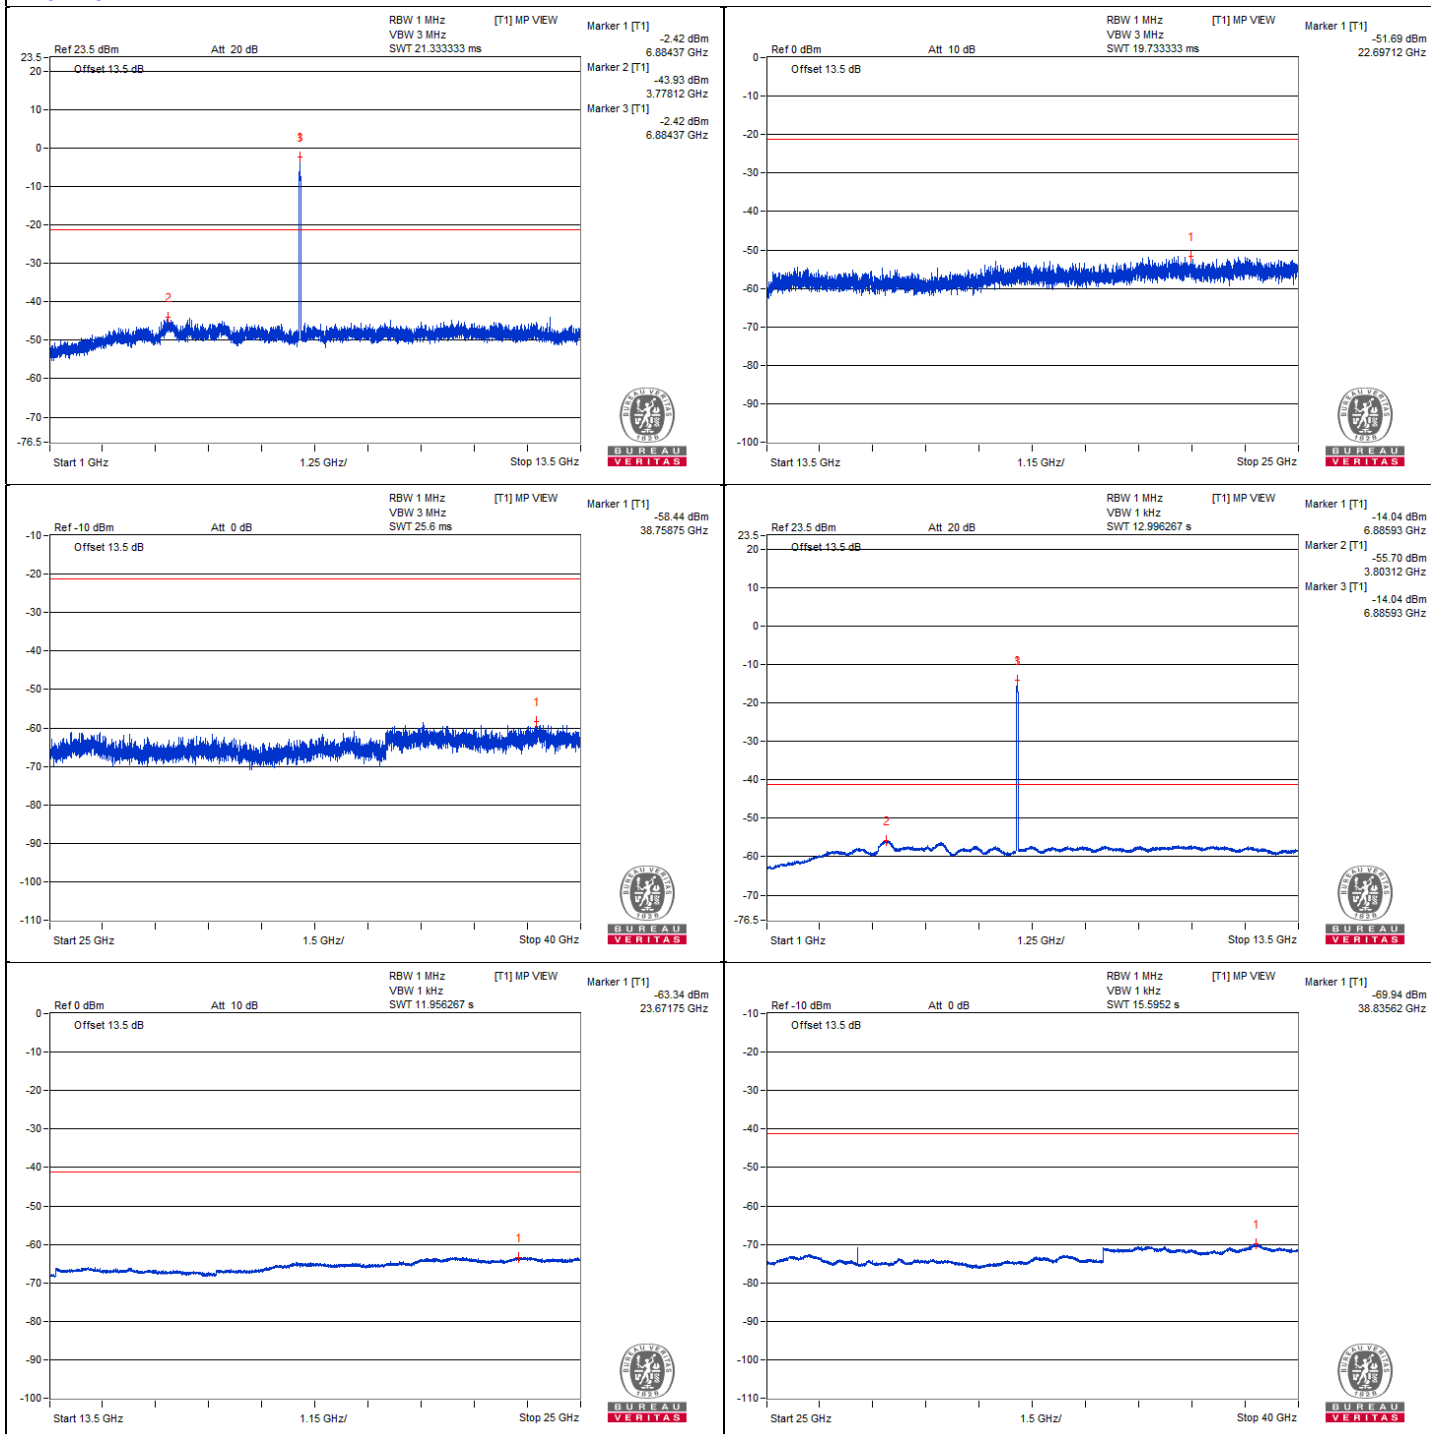





### Chain 1

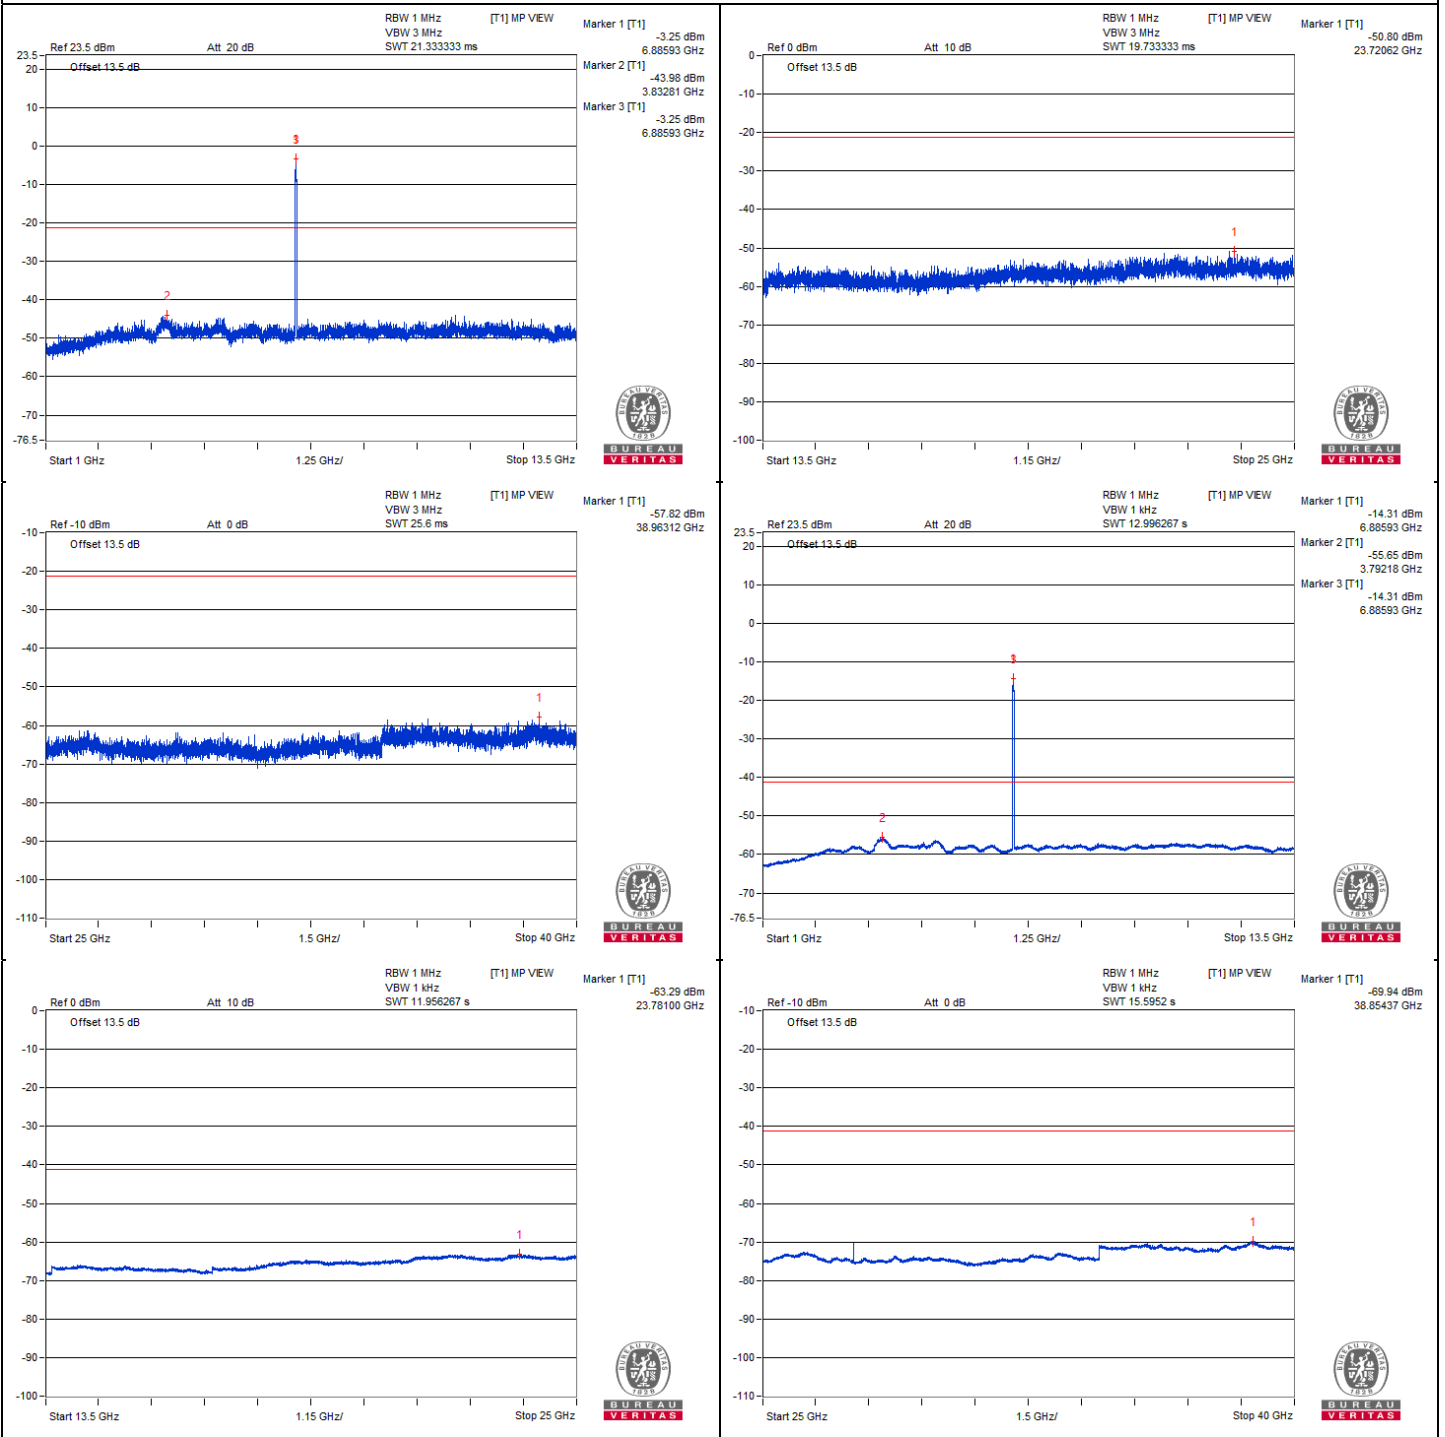

### 802.11be (EHT40) - Channel 211

#### Conducted spurious emission table


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #14014.62       | 50.08 PK                | 88.2           | -38.12      | -55.21          | -57.92 | 8.17                   | -45.18           |
| 2   | #14011.75       | 39.79 AV                | 68.2           | -28.41      | -66.7           | -66.6  | 8.17                   | -55.47           |
| 3   | 21012.37        | 51.16 PK                | 74             | -22.84      | -56.2           | -54.53 | 8.17                   | -44.10           |
| 4   | 21021           | 41.48 AV                | 54             | -12.52      | -64.91          | -65.02 | 8.17                   | -53.78           |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




### Chain 0

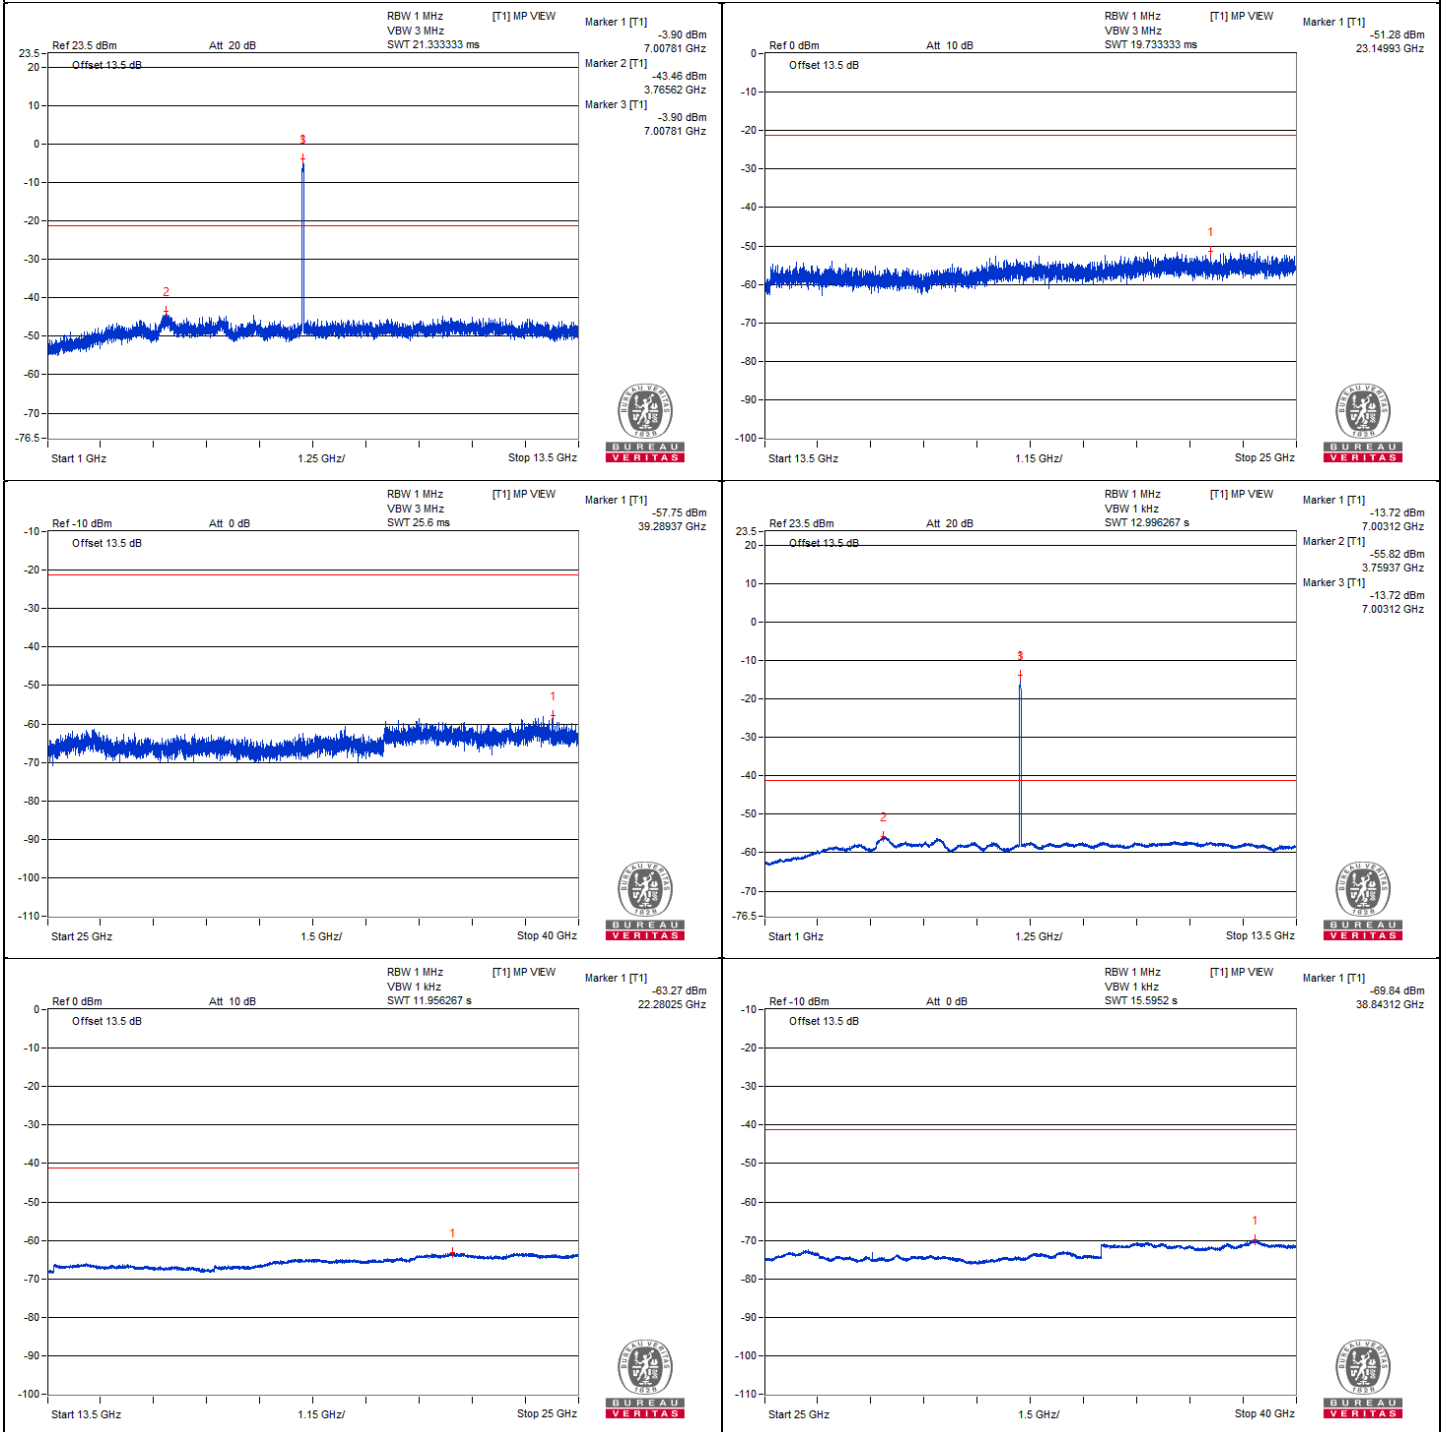



### Chain 1

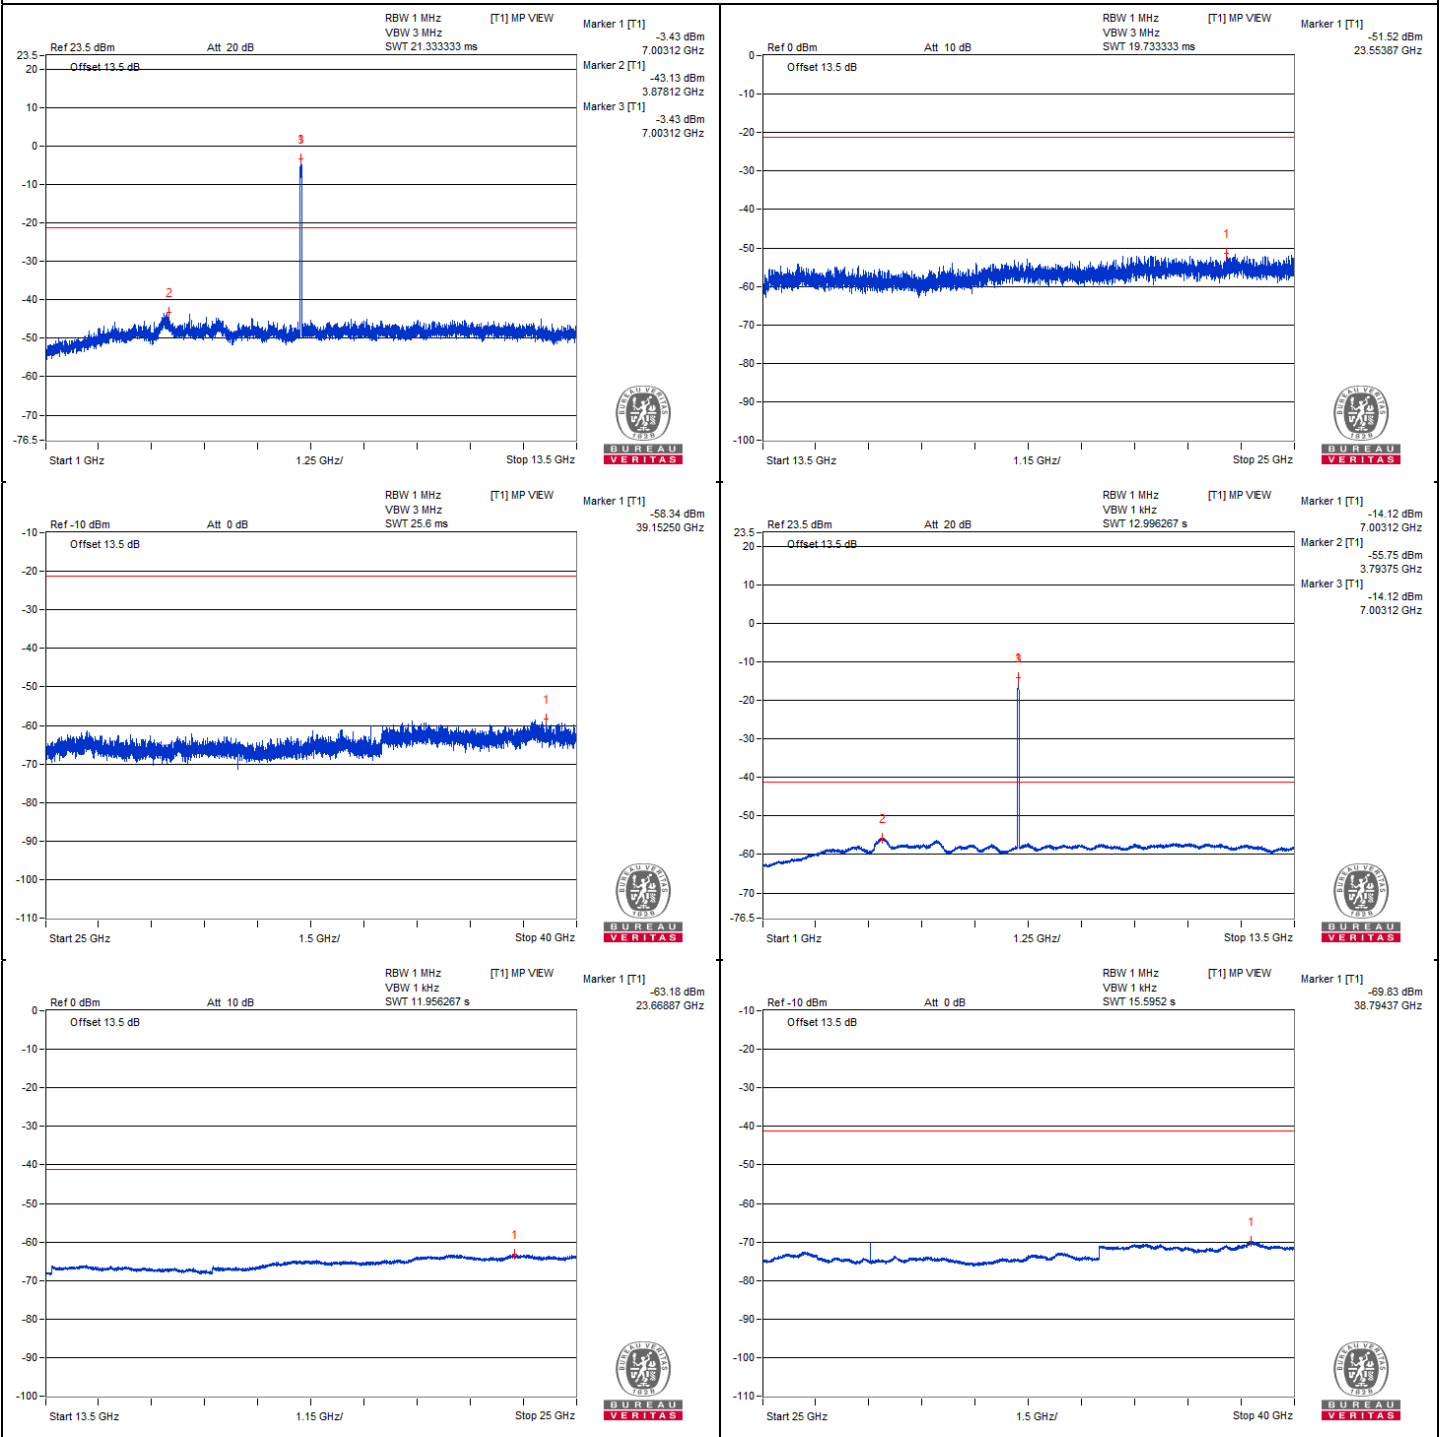

### 802.11be (EHT40) - Channel 227

#### Conducted spurious emission table







| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #14174.18       | 49.36 PK                | 88.2           | -38.84      | -56.51          | -57.73 | 8.17                   | -45.90           |
| 2   | #14174.18       | 39.85 AV                | 68.2           | -28.35      | -66.56          | -66.63 | 8.17                   | -55.41           |
| 3   | 21256.75        | 51.19 PK                | 74             | -22.81      | -55.39          | -55.11 | 8.17                   | -44.07           |
| 4   | 21255.31        | 41.44 AV                | 54             | -12.56      | -65             | -65.01 | 8.17                   | -53.82           |

#### Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




### Chain 0

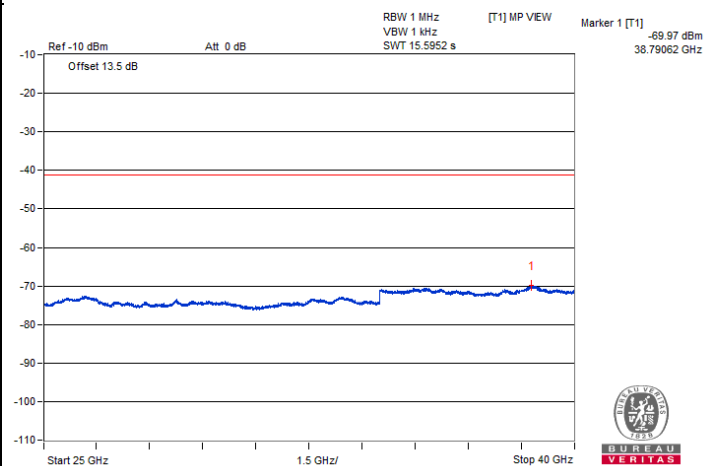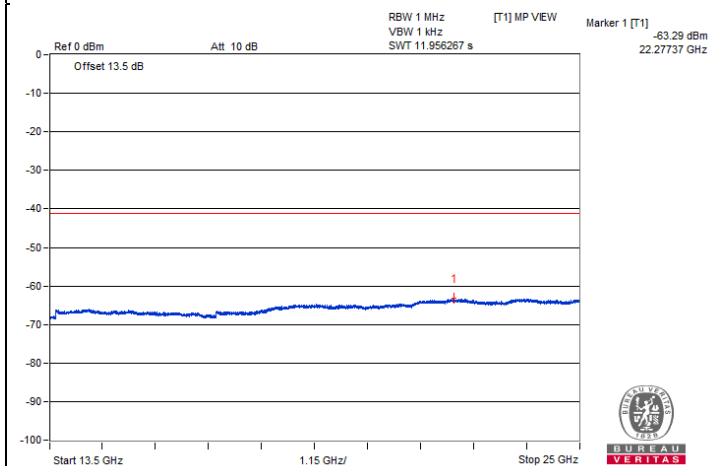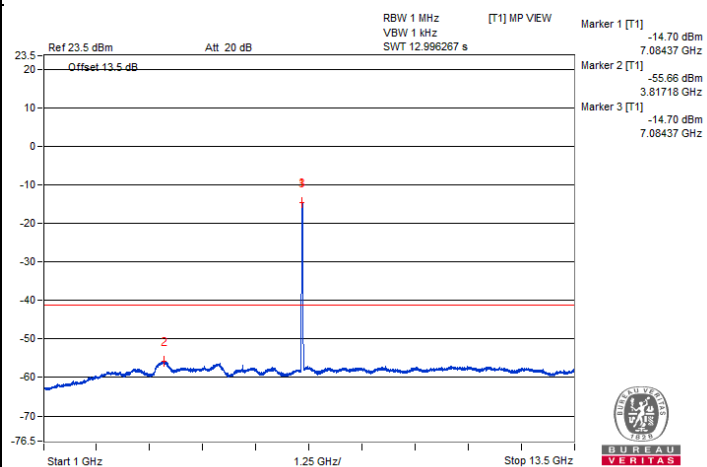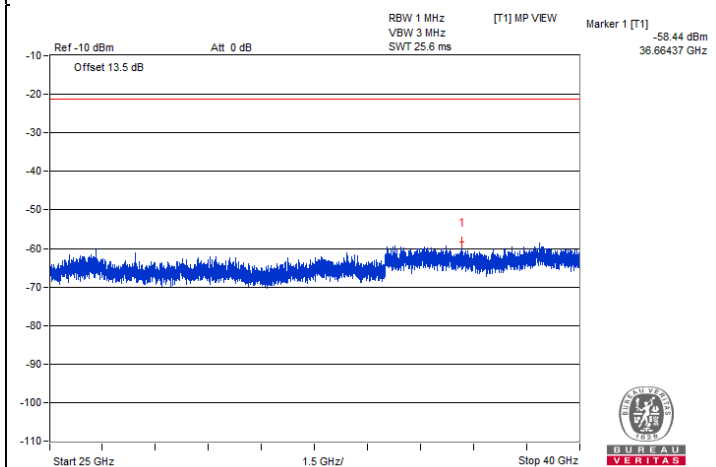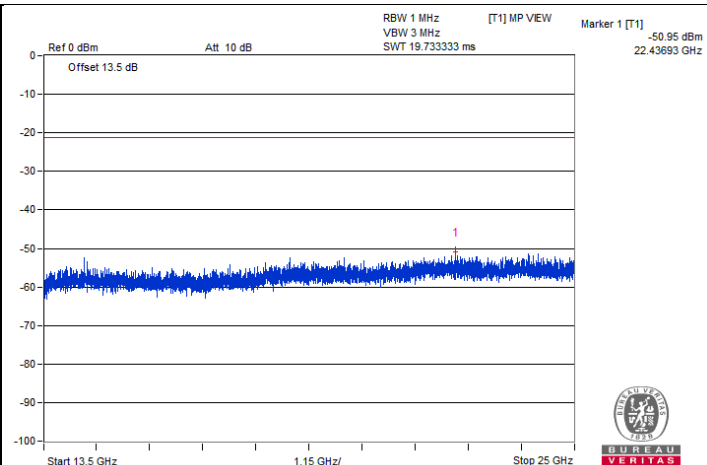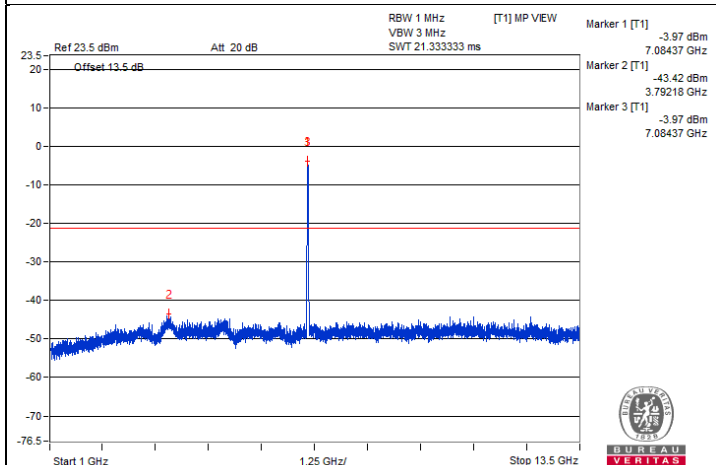



BUREAU  
VERITAS

### Chain 1

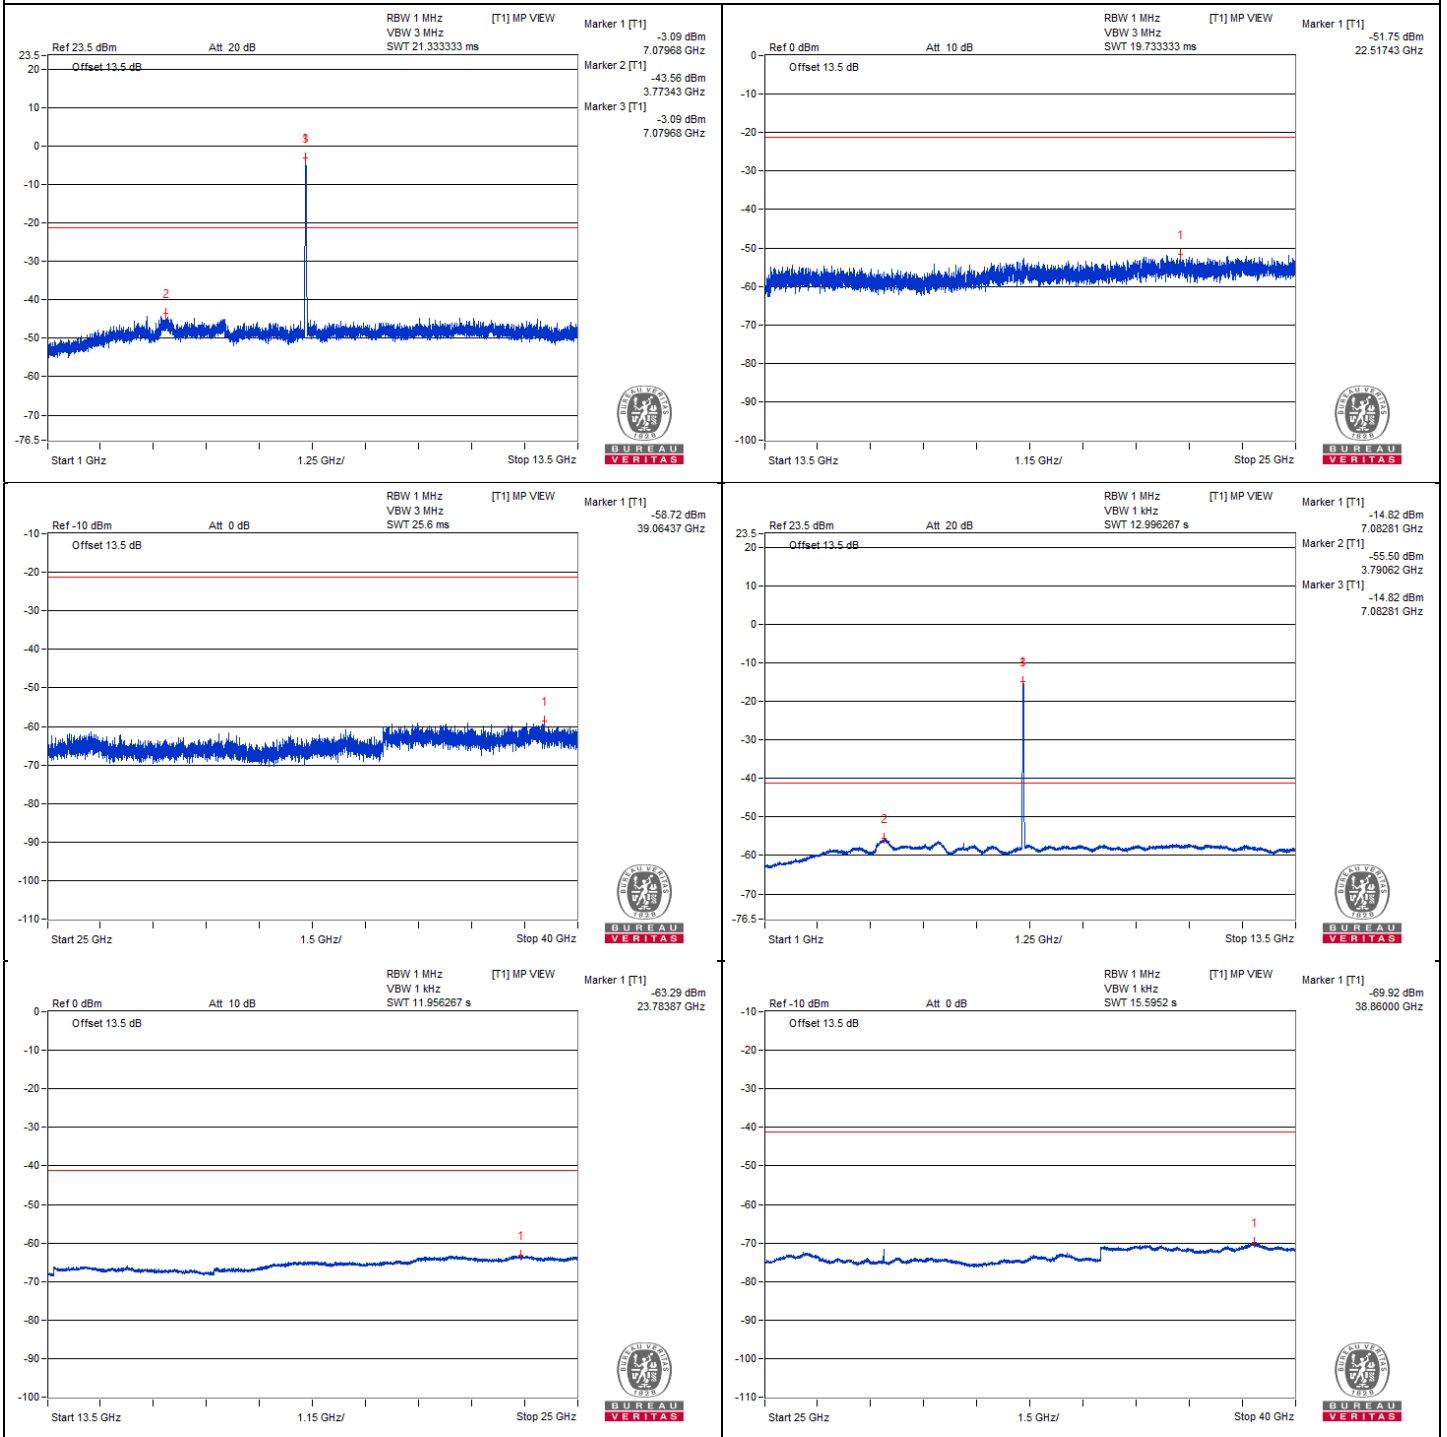


**Bandedge table**

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #7209.72        | 51.68 PK                | 88.2           | -36.52      | -55.98          | -53.74 | 8.13                   | -43.58           |
| 2   | #7125.27        | 39.43 AV                | 68.2           | -28.77      | -66.96          | -66.98 | 8.13                   | -55.83           |


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

**Chain 0**

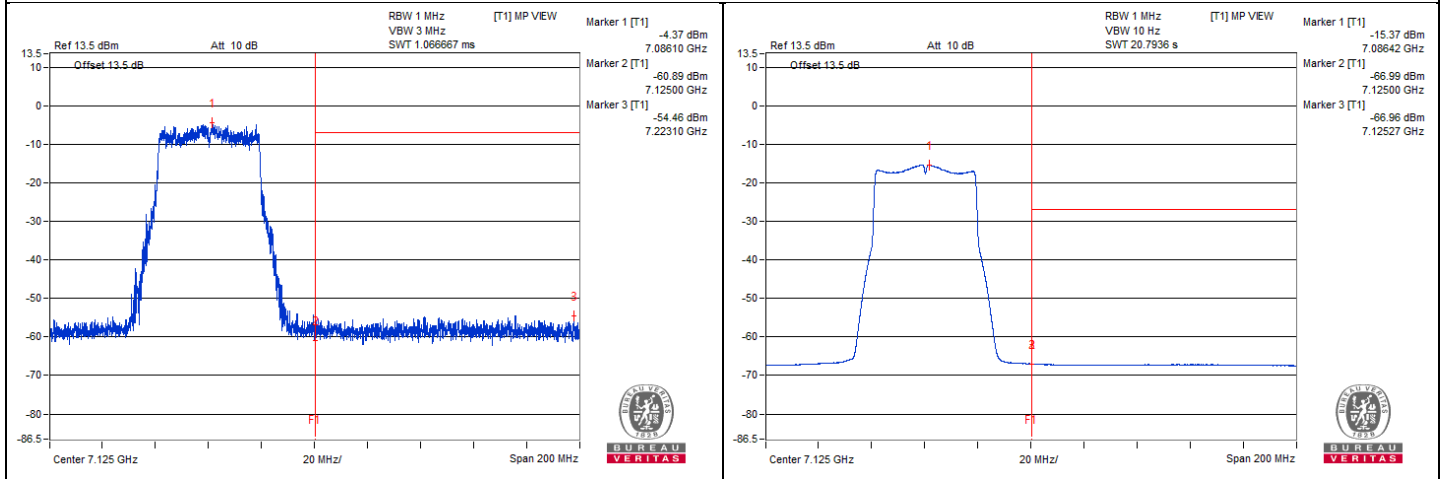

**Chain 1**

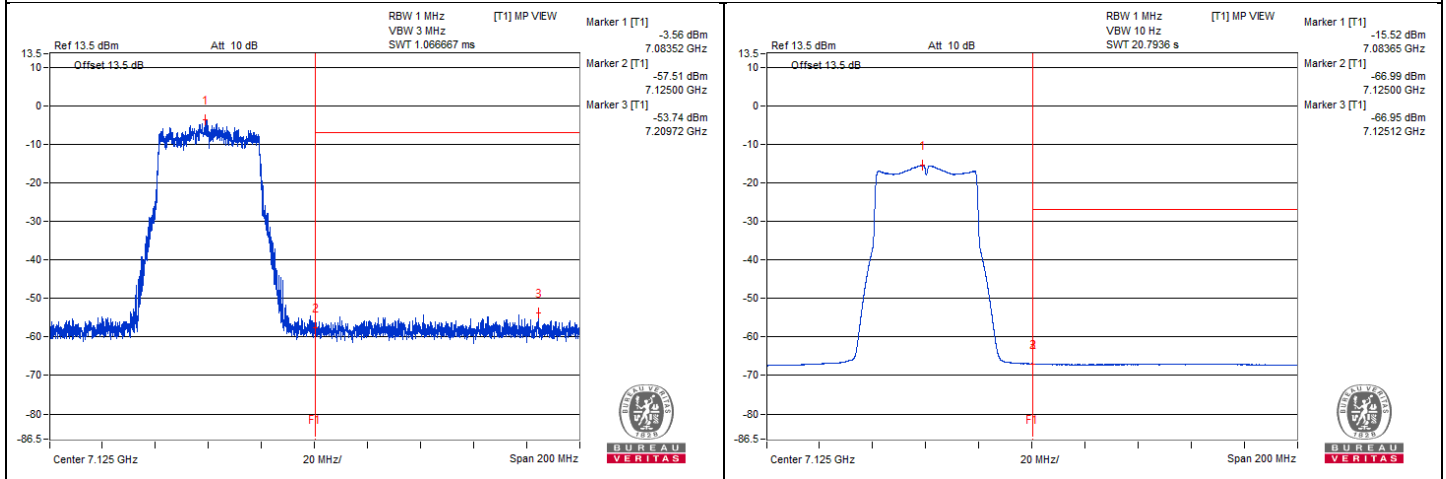



### 802.11be (EHT80) - Channel 7

#### Conducted spurious emission table


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 11968.75        | 59.66 PK                | 74             | -14.34      | -47.91          | -45.89 | 8.17                   | -35.60           |
| 2   | 11975           | 48.16 AV                | 54             | -5.84       | -58.54          | -58.03 | 8.17                   | -47.10           |
| 3   | 17956.25        | 49.85 PK                | 74             | -24.15      | -57.11          | -56.12 | 8.17                   | -45.41           |
| 4   | 17950.5         | 39.54 AV                | 54             | -14.46      | -66.75          | -67.06 | 8.17                   | -55.72           |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.




### Chain 0

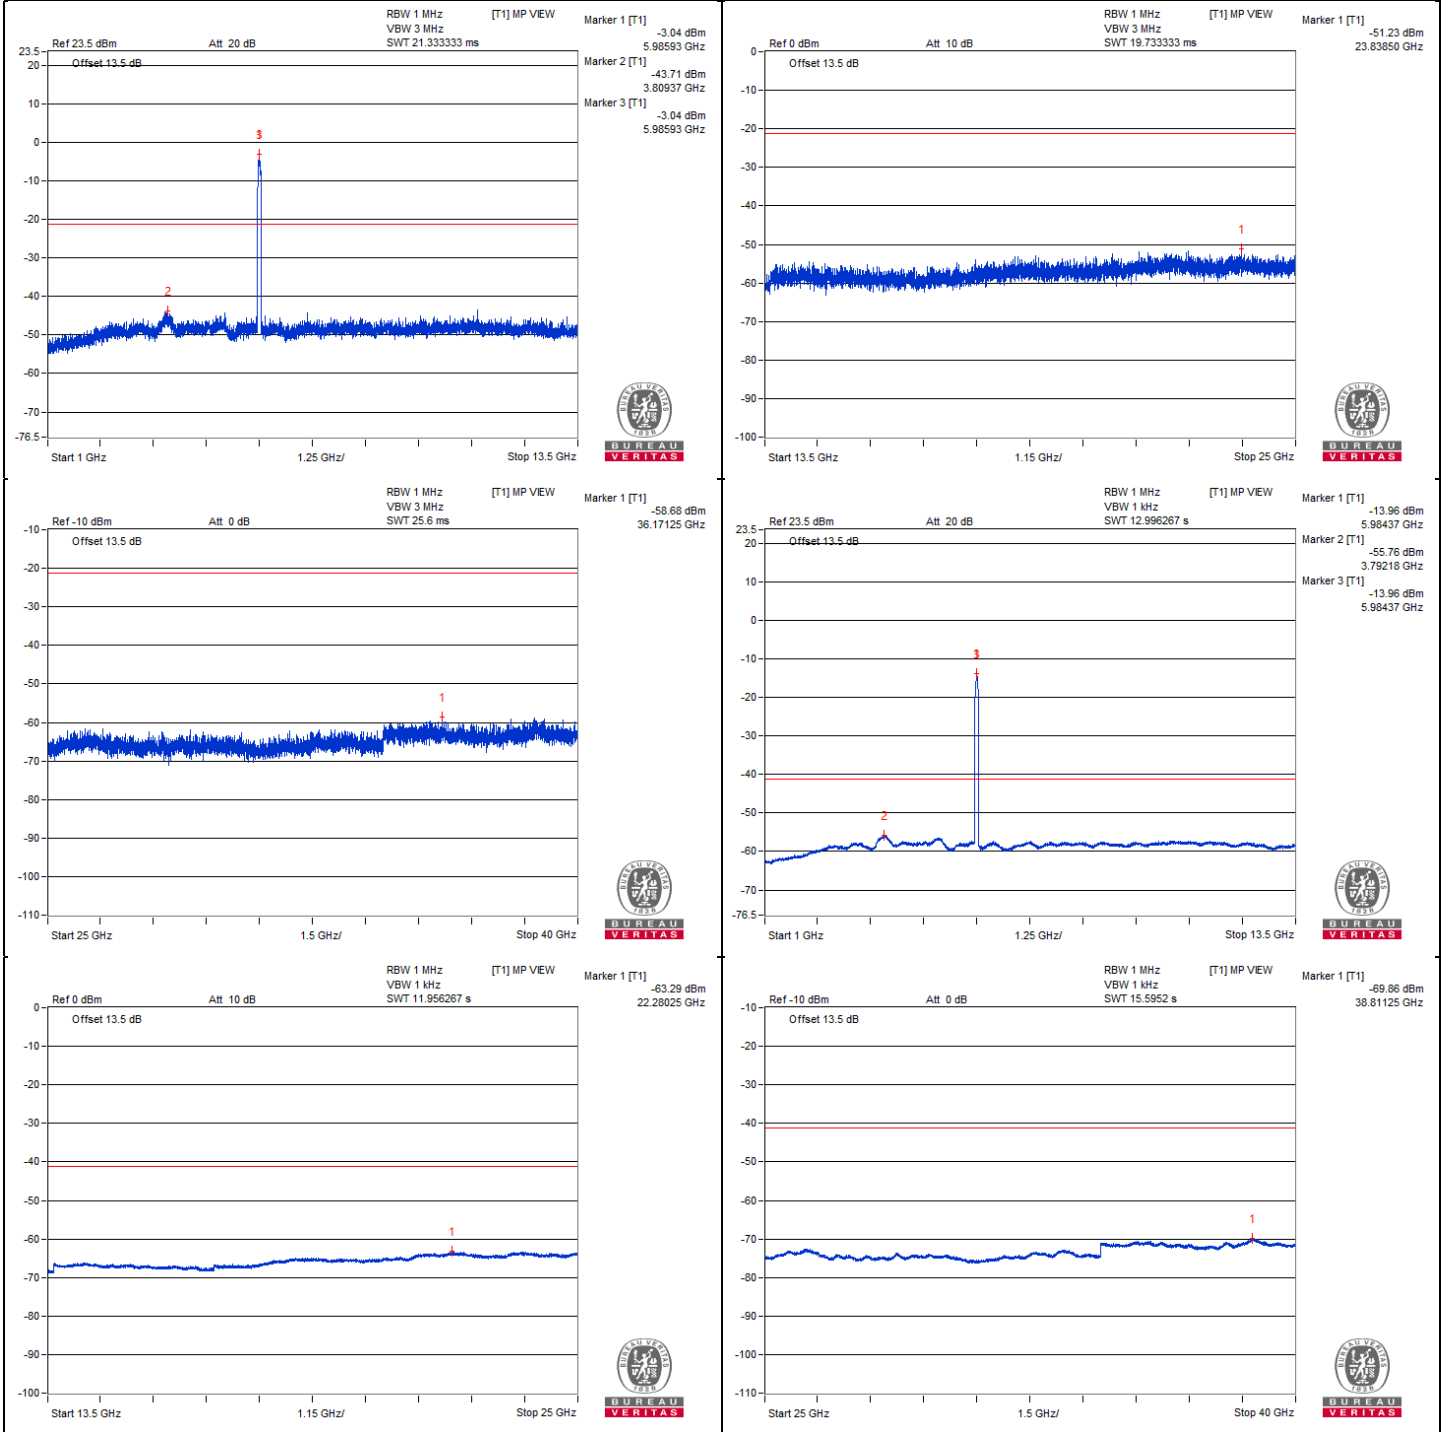



### Chain 1

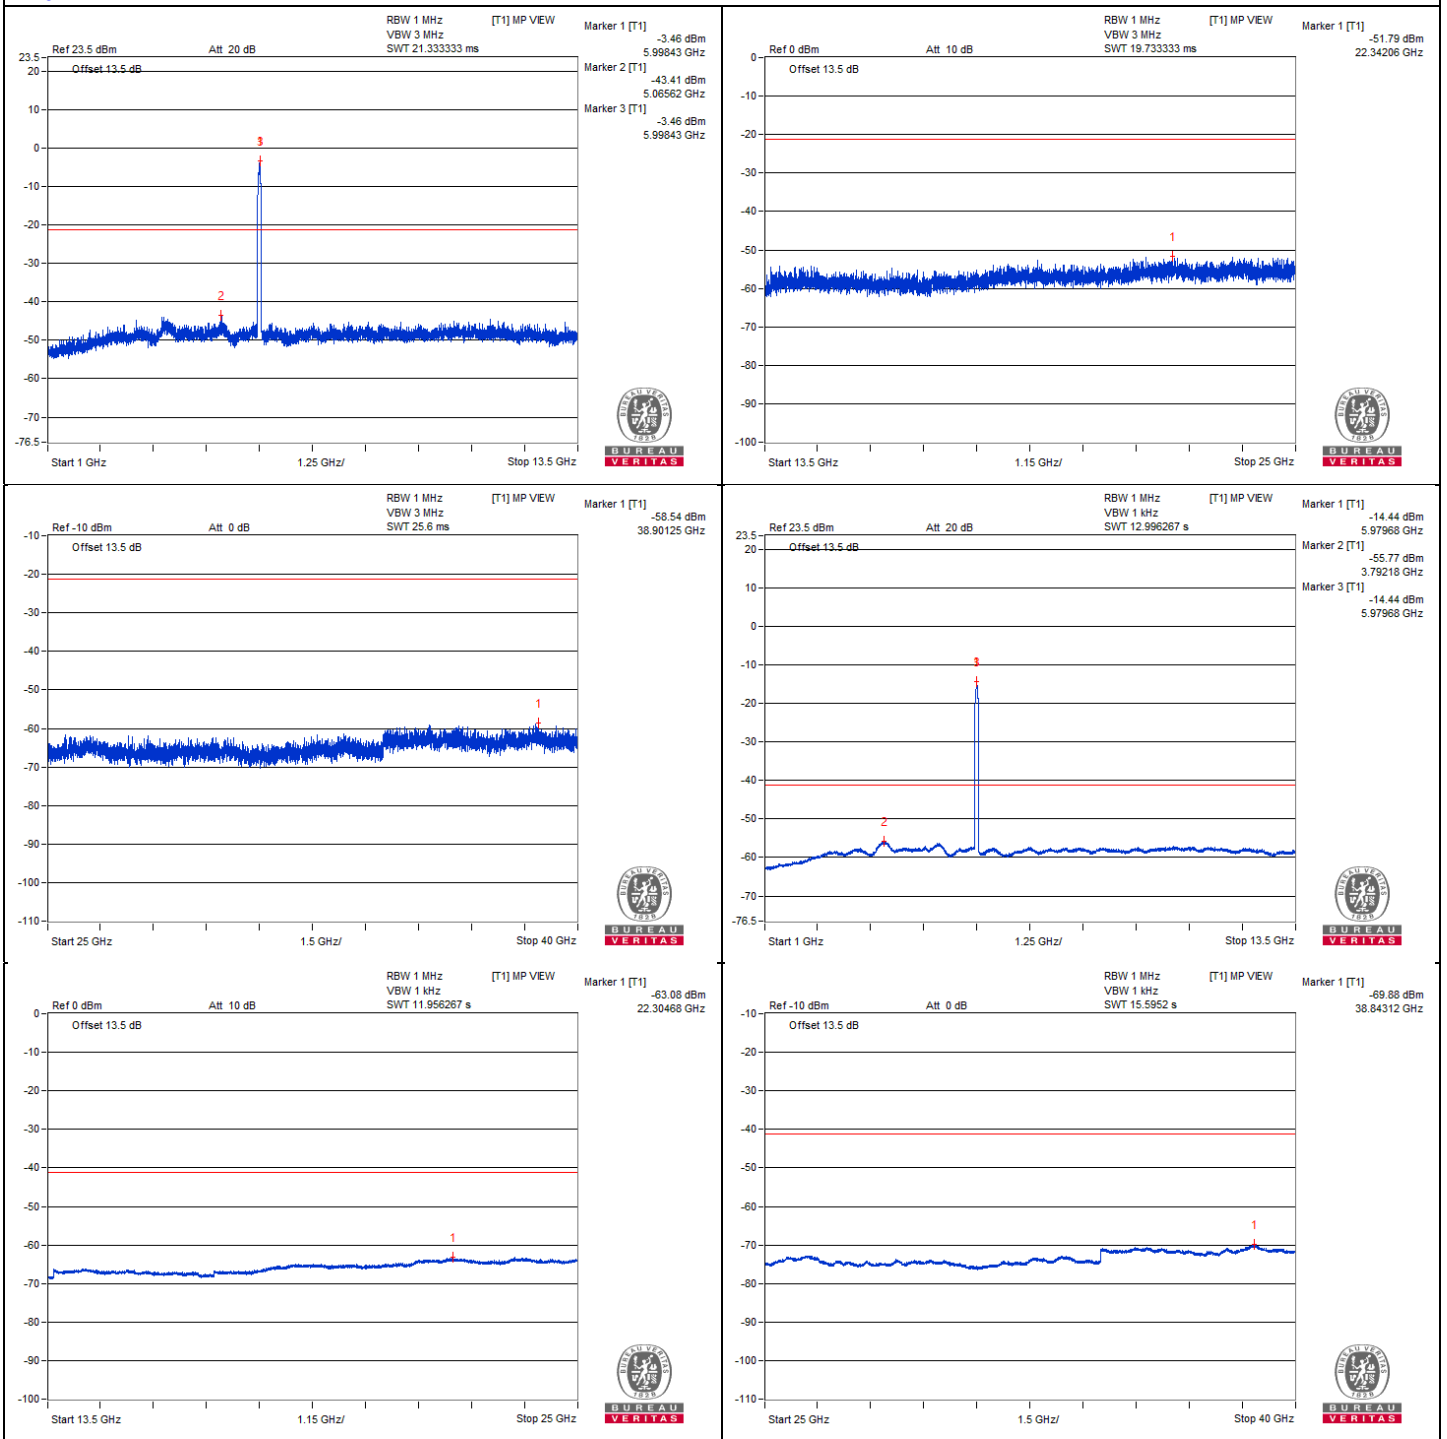


**Bandedge table**

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #5867.42        | 59.64 PK                | 88.2           | -28.56      | -47.83          | -45.94 | 8.15                   | -35.62           |
| 2   | #5923.42        | 39.47 AV                | 68.2           | -28.73      | -66.85          | -67.06 | 8.15                   | -55.79           |


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

**Chain 0**

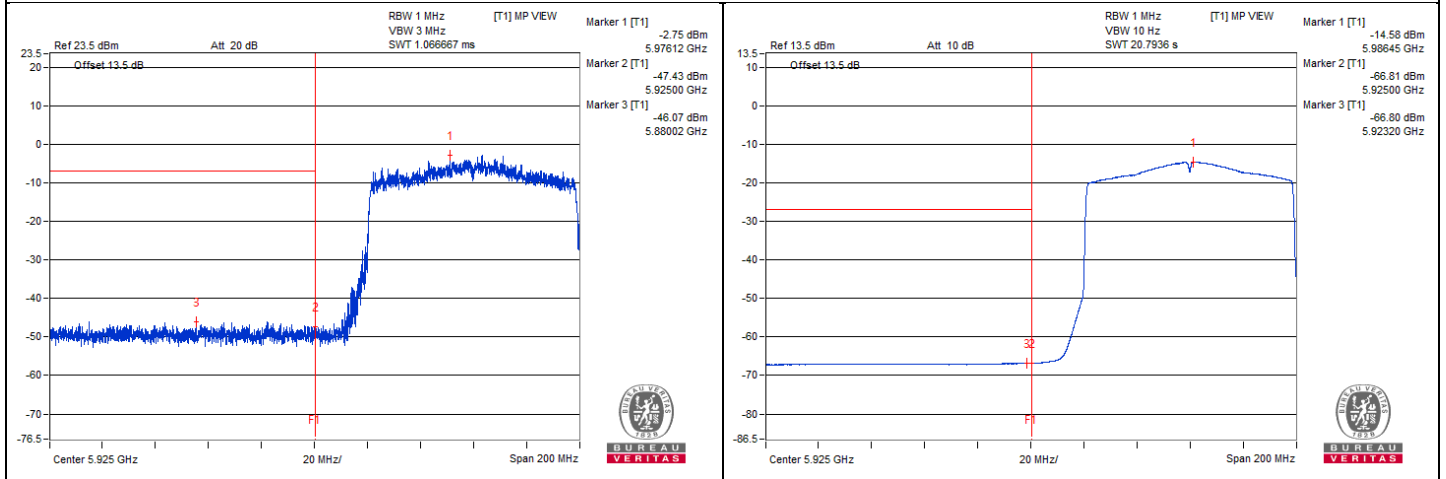

**Chain 1**

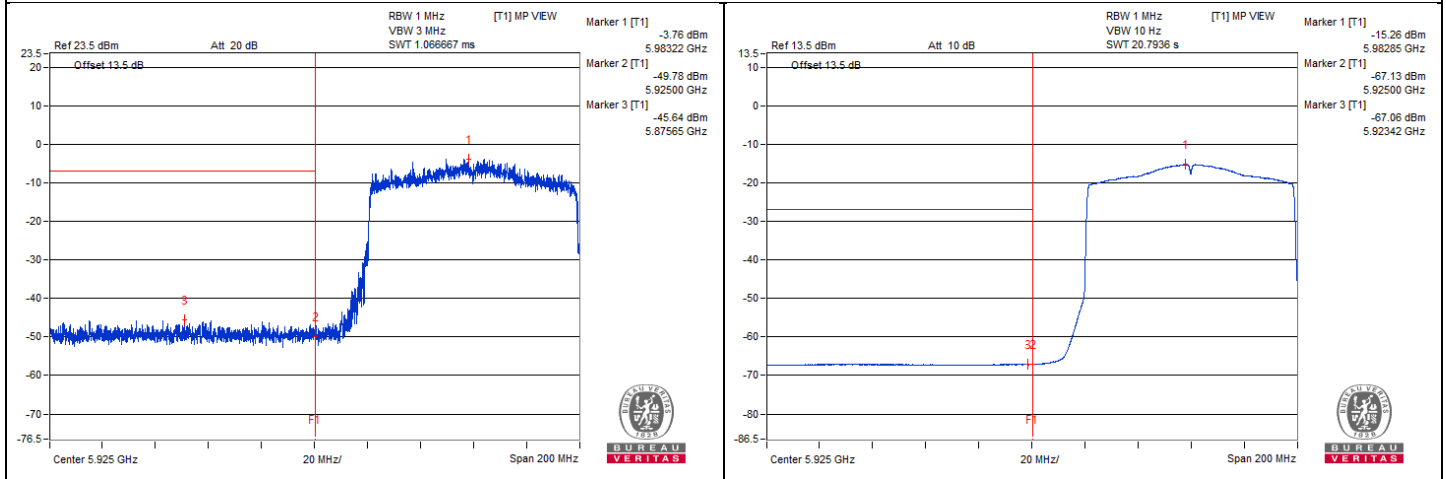

### 802.11be (EHT80) - Channel 39

#### Conducted spurious emission table


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 12287.5         | 59.83 PK                | 74             | -14.17      | -47.16          | -46.13 | 8.17                   | -35.43           |
| 2   | 12296.87        | 48.55 AV                | 54             | -5.45       | -57.96          | -57.83 | 8.17                   | -46.71           |
| 3   | 18445           | 50.07 PK                | 74             | -23.93      | -57.06          | -55.78 | 8.17                   | -45.19           |
| 4   | 18442.12        | 40.67 AV                | 54             | -13.33      | -66.04          | -65.52 | 8.17                   | -54.59           |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.




### Chain 0

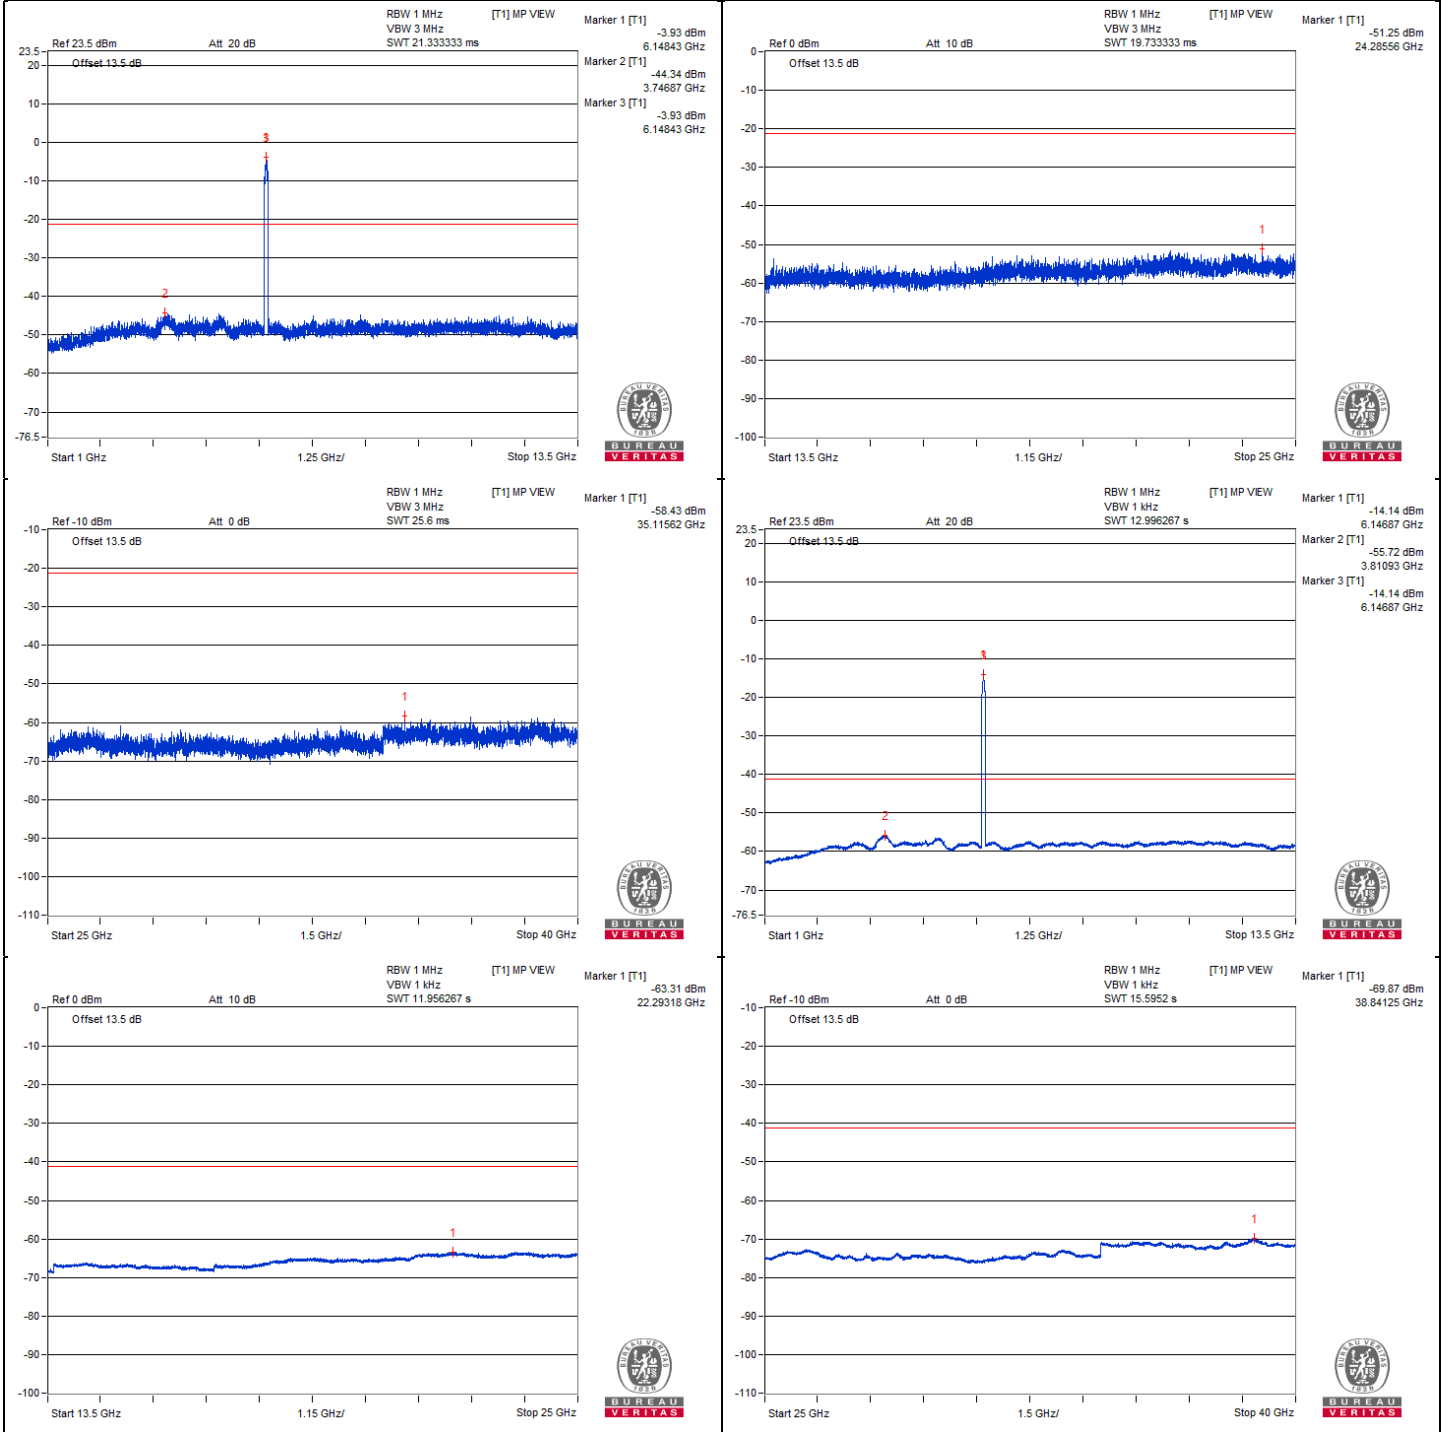



### Chain 1

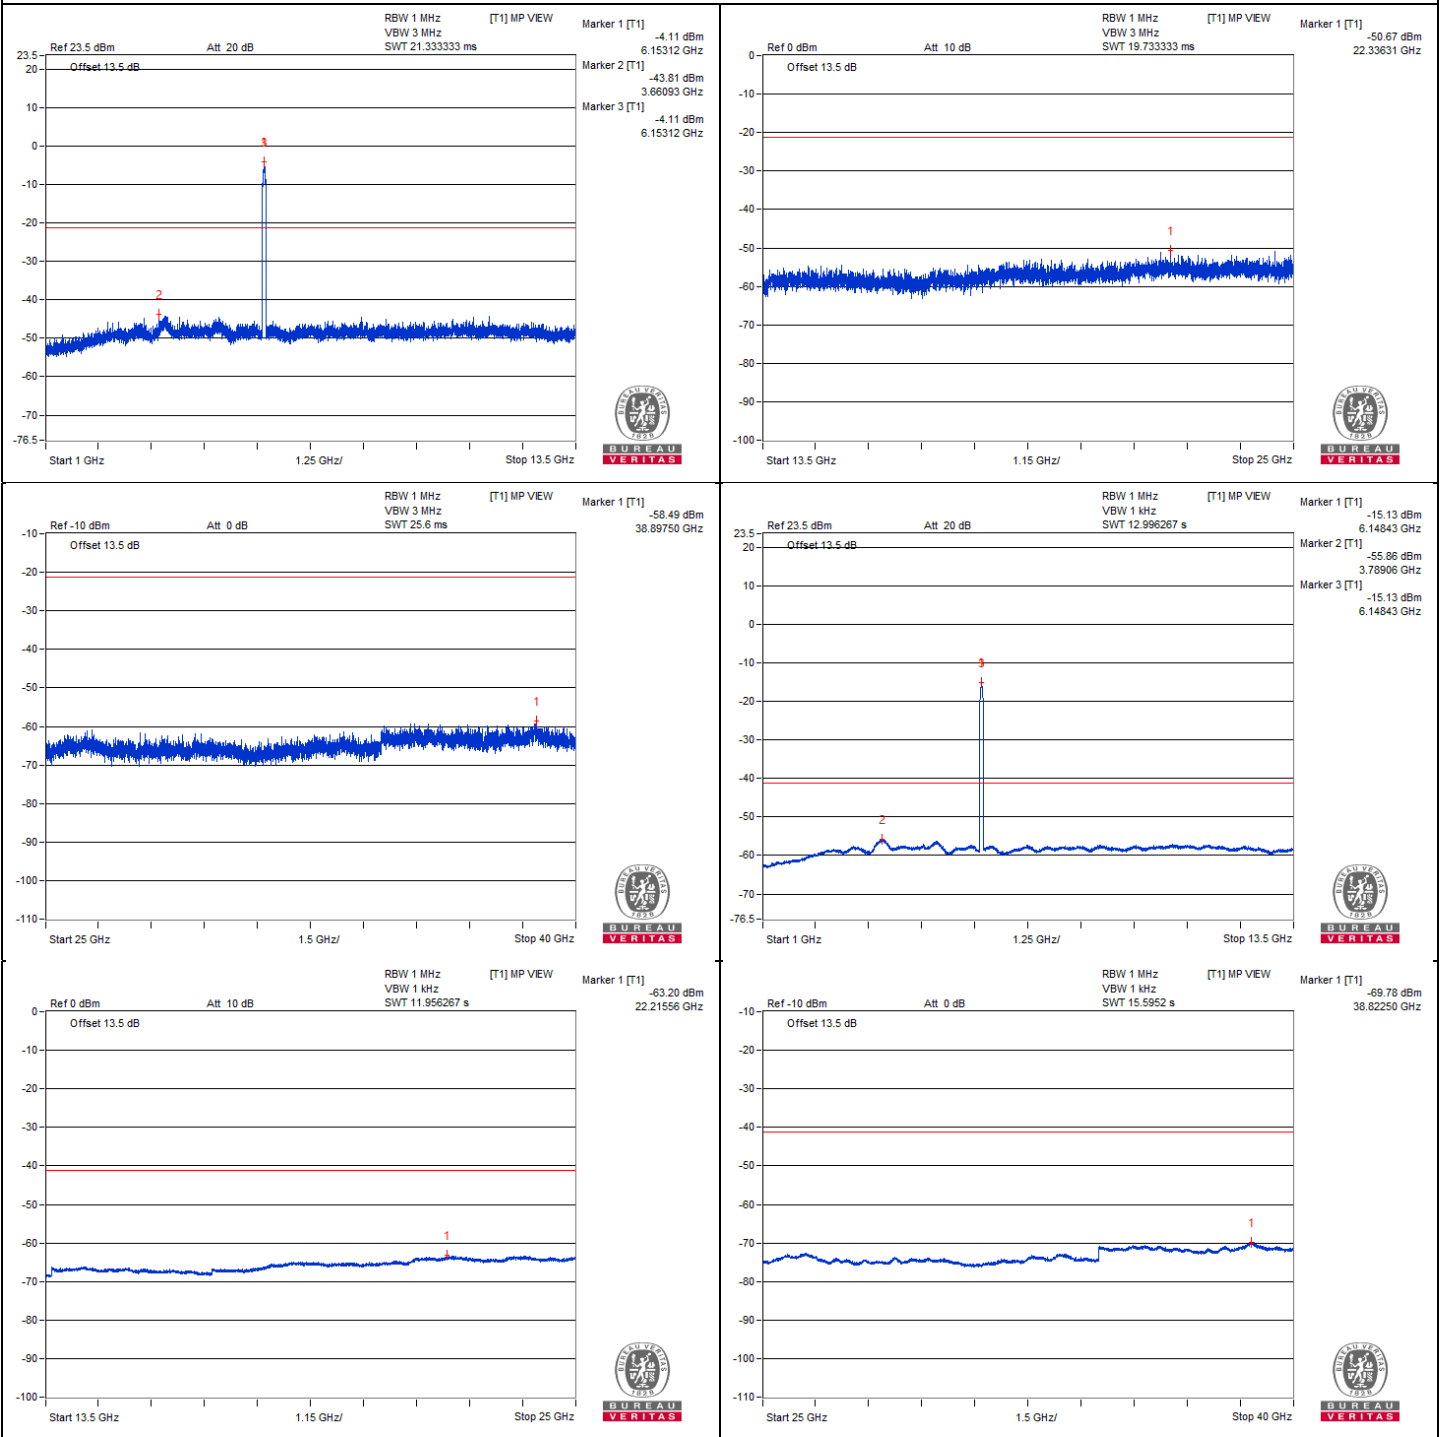

### 802.11be (EHT80) - Channel 87

#### Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #12773.43       | 58.93 PK                | 88.2           | -29.27      | -47.84          | -47.21 | 8.17                   | -36.33           |
| 2   | #12771.87       | 48.01 AV                | 68.2           | -20.19      | -58.42          | -58.44 | 8.17                   | -47.25           |
| 3   | 19147.93        | 51.72 PK                | 74             | -22.28      | -54.42          | -55.05 | 8.17                   | -43.54           |
| 4   | 19146.5         | 41.3 AV                 | 54             | -12.7       | -65.04          | -65.24 | 8.17                   | -53.96           |


#### Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.






### Chain 0

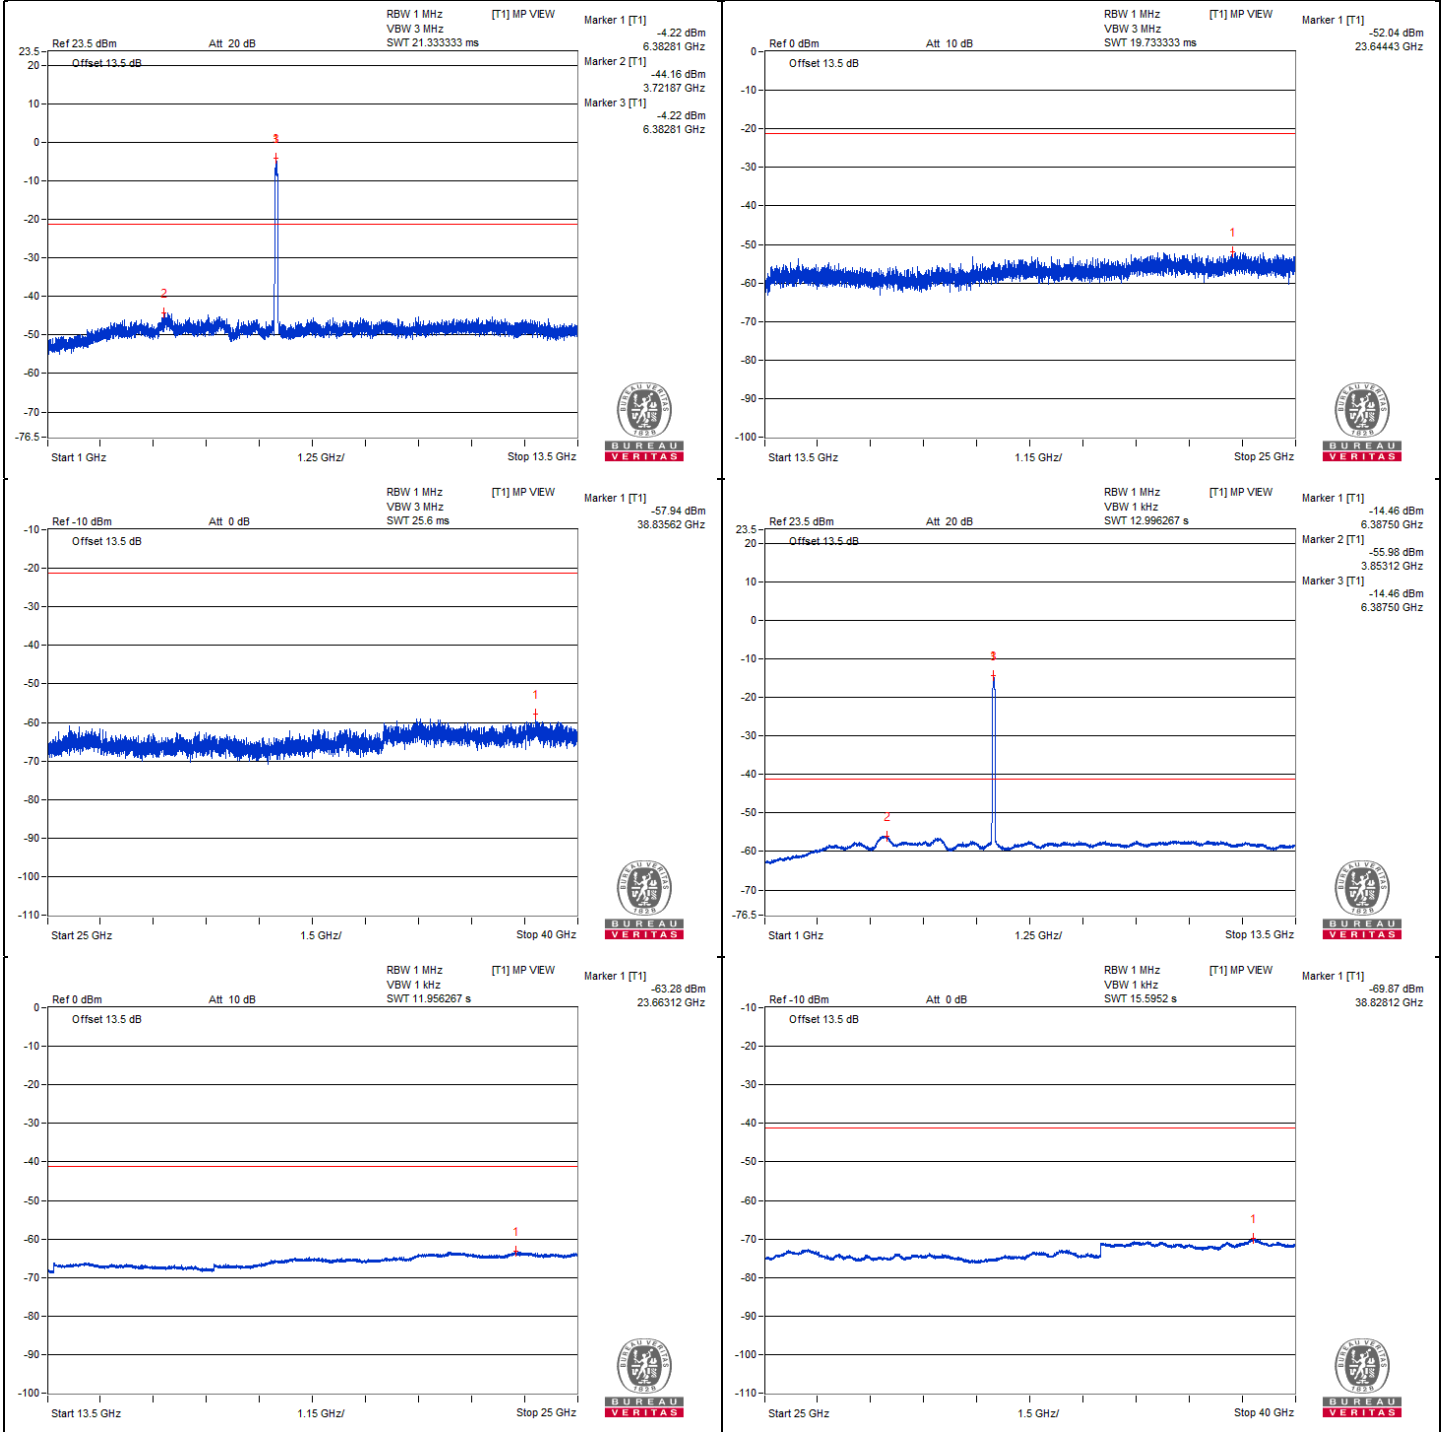



### Chain 1

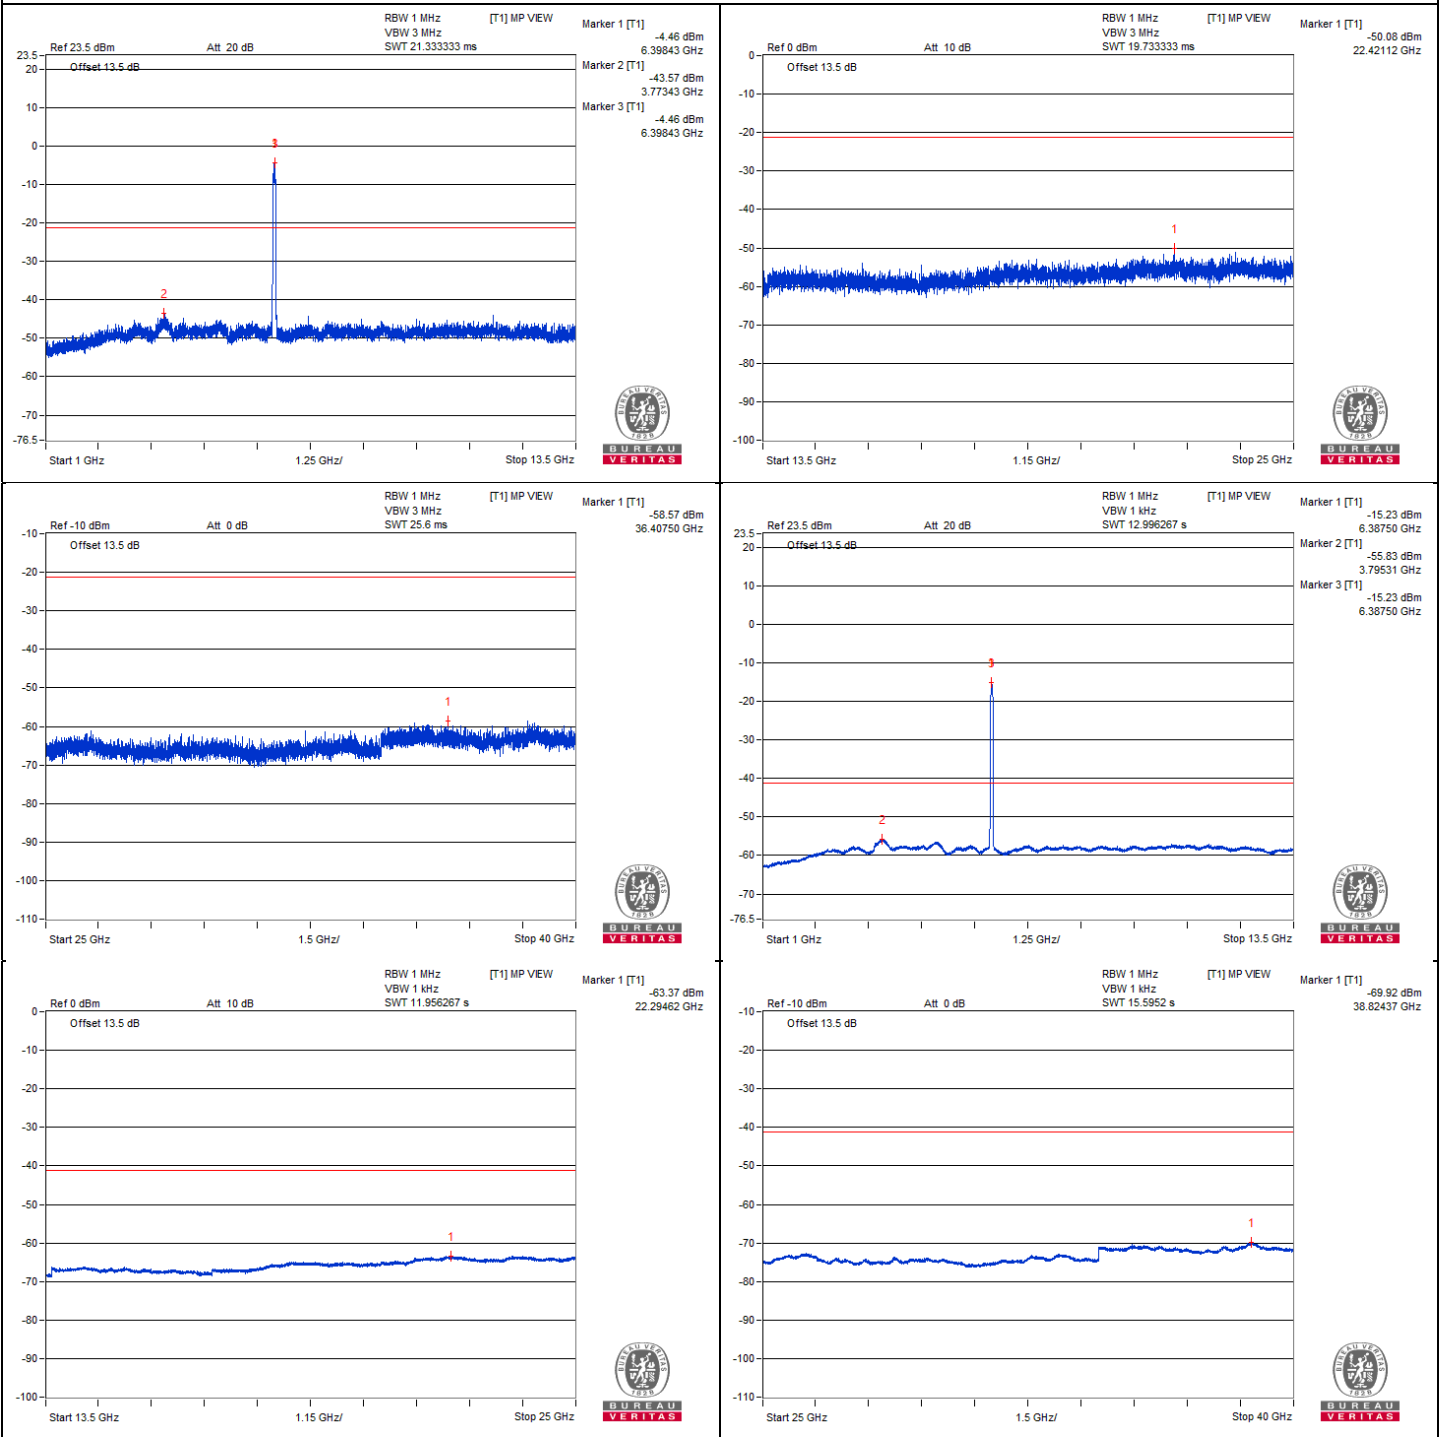

### 802.11be (EHT80) - Channel 103

#### Conducted spurious emission table


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #12939.06       | 57.49 PK                | 88.2           | -30.71      | -49.23          | -48.69 | 8.17                   | -37.77           |
| 2   | #12934.37       | 47.38 AV                | 68.2           | -20.82      | -59.07          | -59.06 | 8.17                   | -47.88           |
| 3   | 19388           | 51.35 PK                | 74             | -22.65      | -53.37          | -57.97 | 8.17                   | -43.91           |
| 4   | 19396.62        | 41.29 AV                | 54             | -12.71      | -65.08          | -65.23 | 8.17                   | -53.97           |

#### Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




### Chain 0

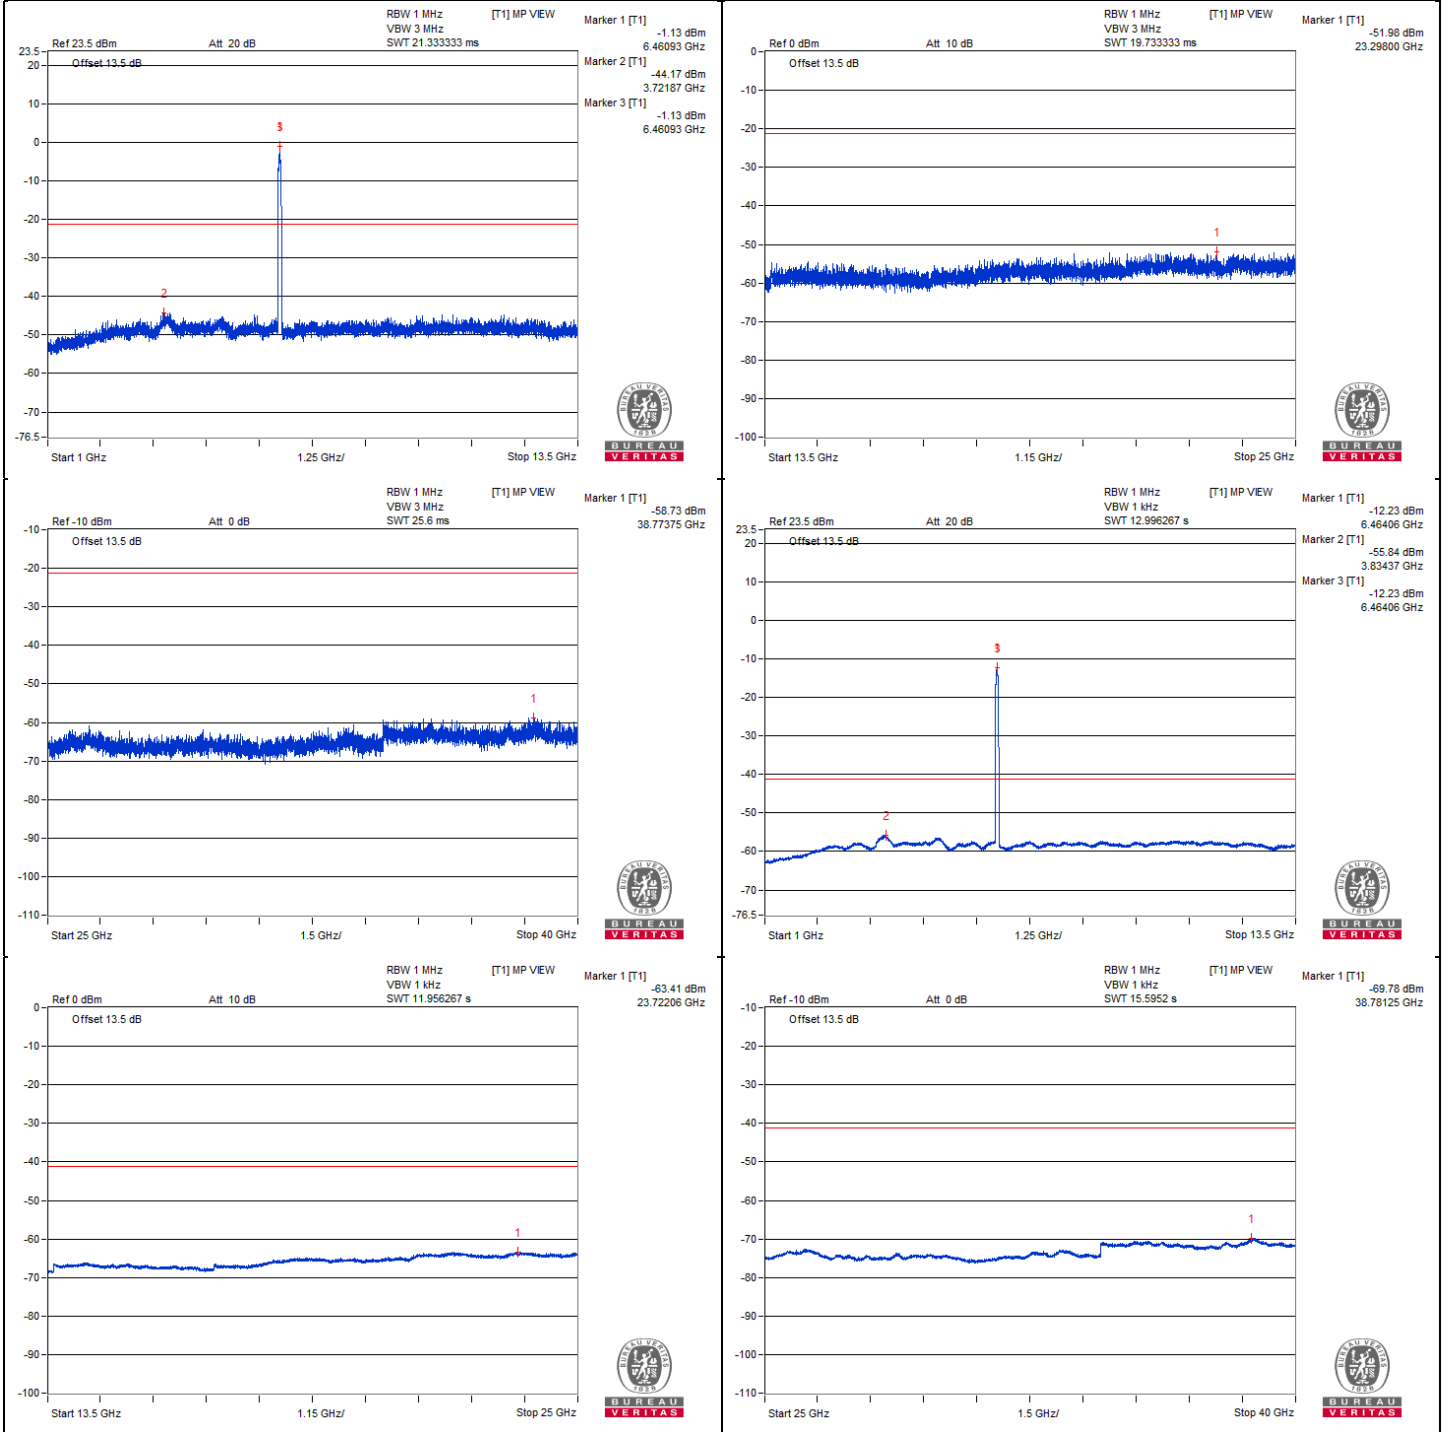



### Chain 1

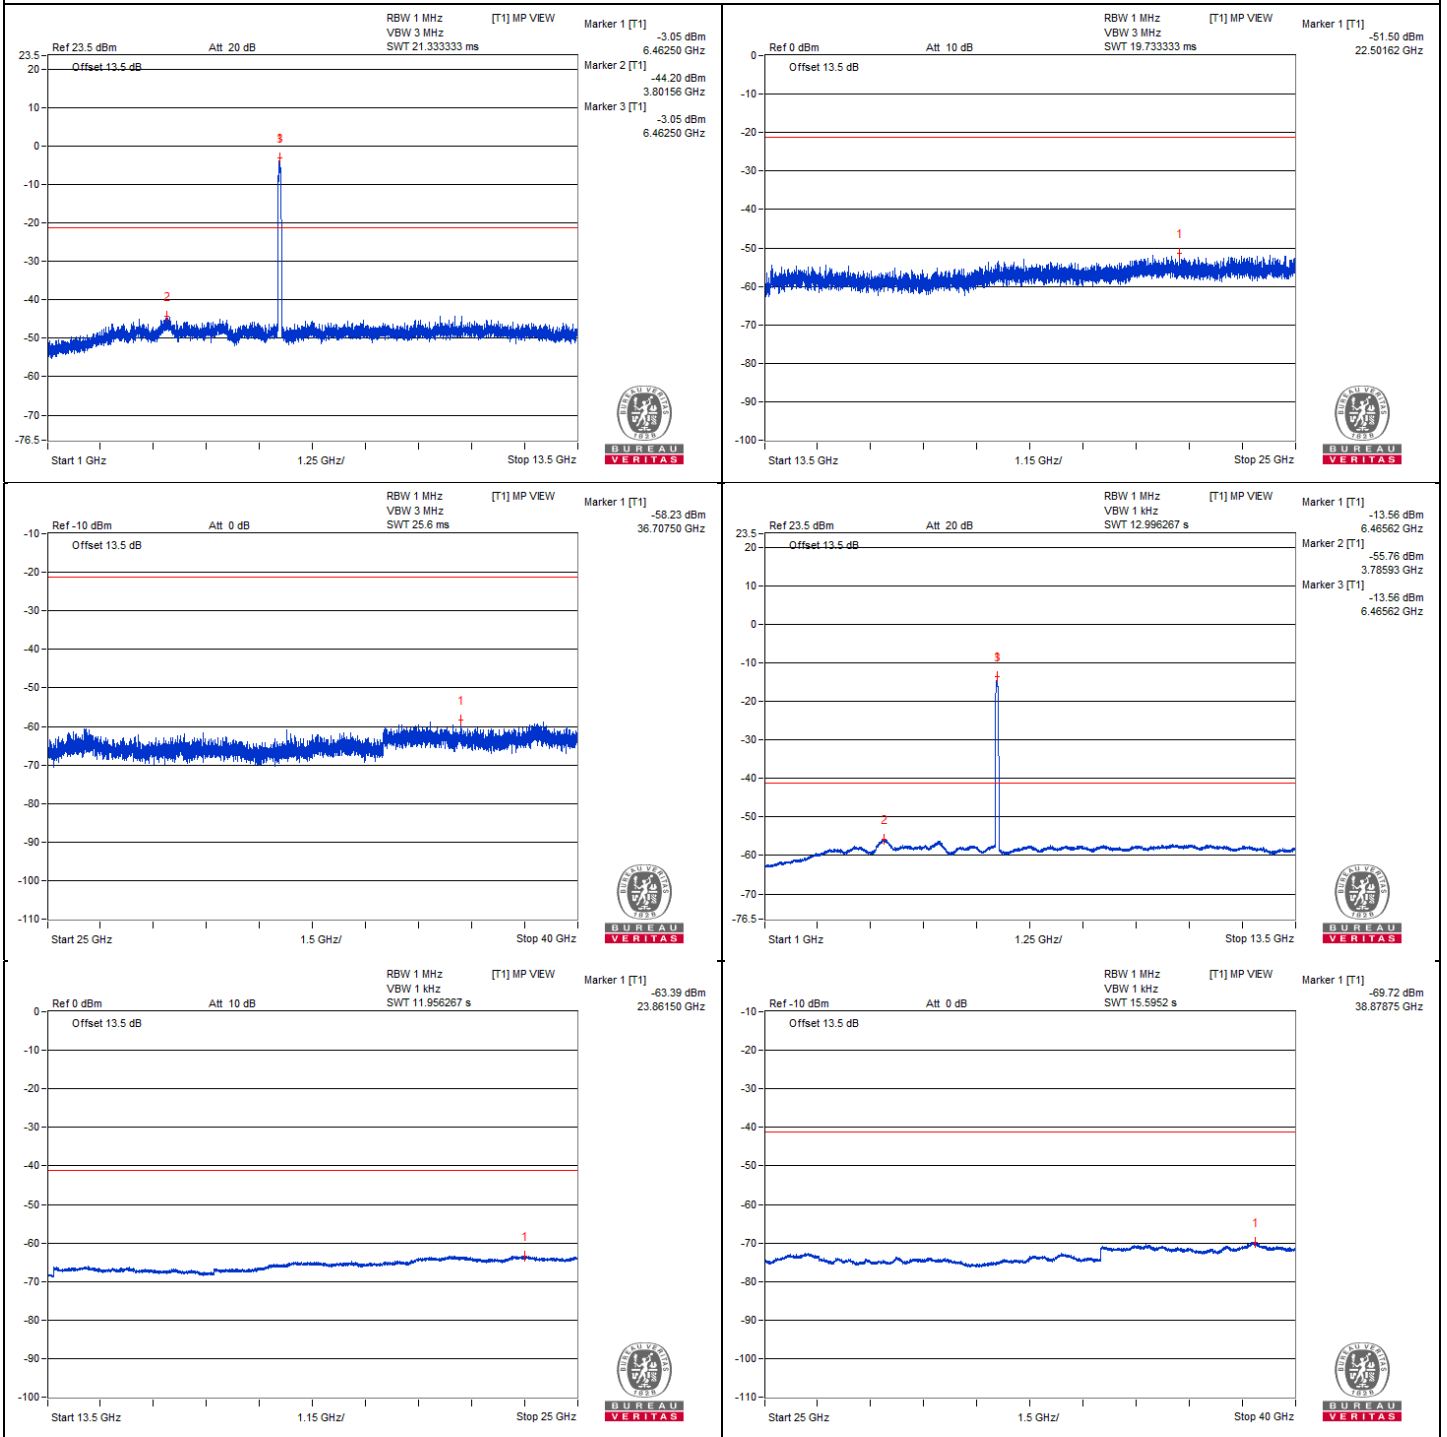

### 802.11be (EHT80) - Channel 119

#### Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #13082.81       | 58.74 PK                | 88.2           | -29.46      | -48.5           | -47.03 | 8.17                   | -36.52           |
| 2   | #13093.75       | 47.59 AV                | 68.2           | -20.61      | -58.79          | -58.91 | 8.17                   | -47.67           |
| 3   | 19642.43        | 50.73 PK                | 74             | -23.27      | -55.28          | -56.19 | 8.17                   | -44.53           |
| 4   | 19632.37        | 40.63 AV                | 54             | -13.37      | -65.7           | -65.93 | 8.17                   | -54.63           |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




### Chain 0





### Chain 1

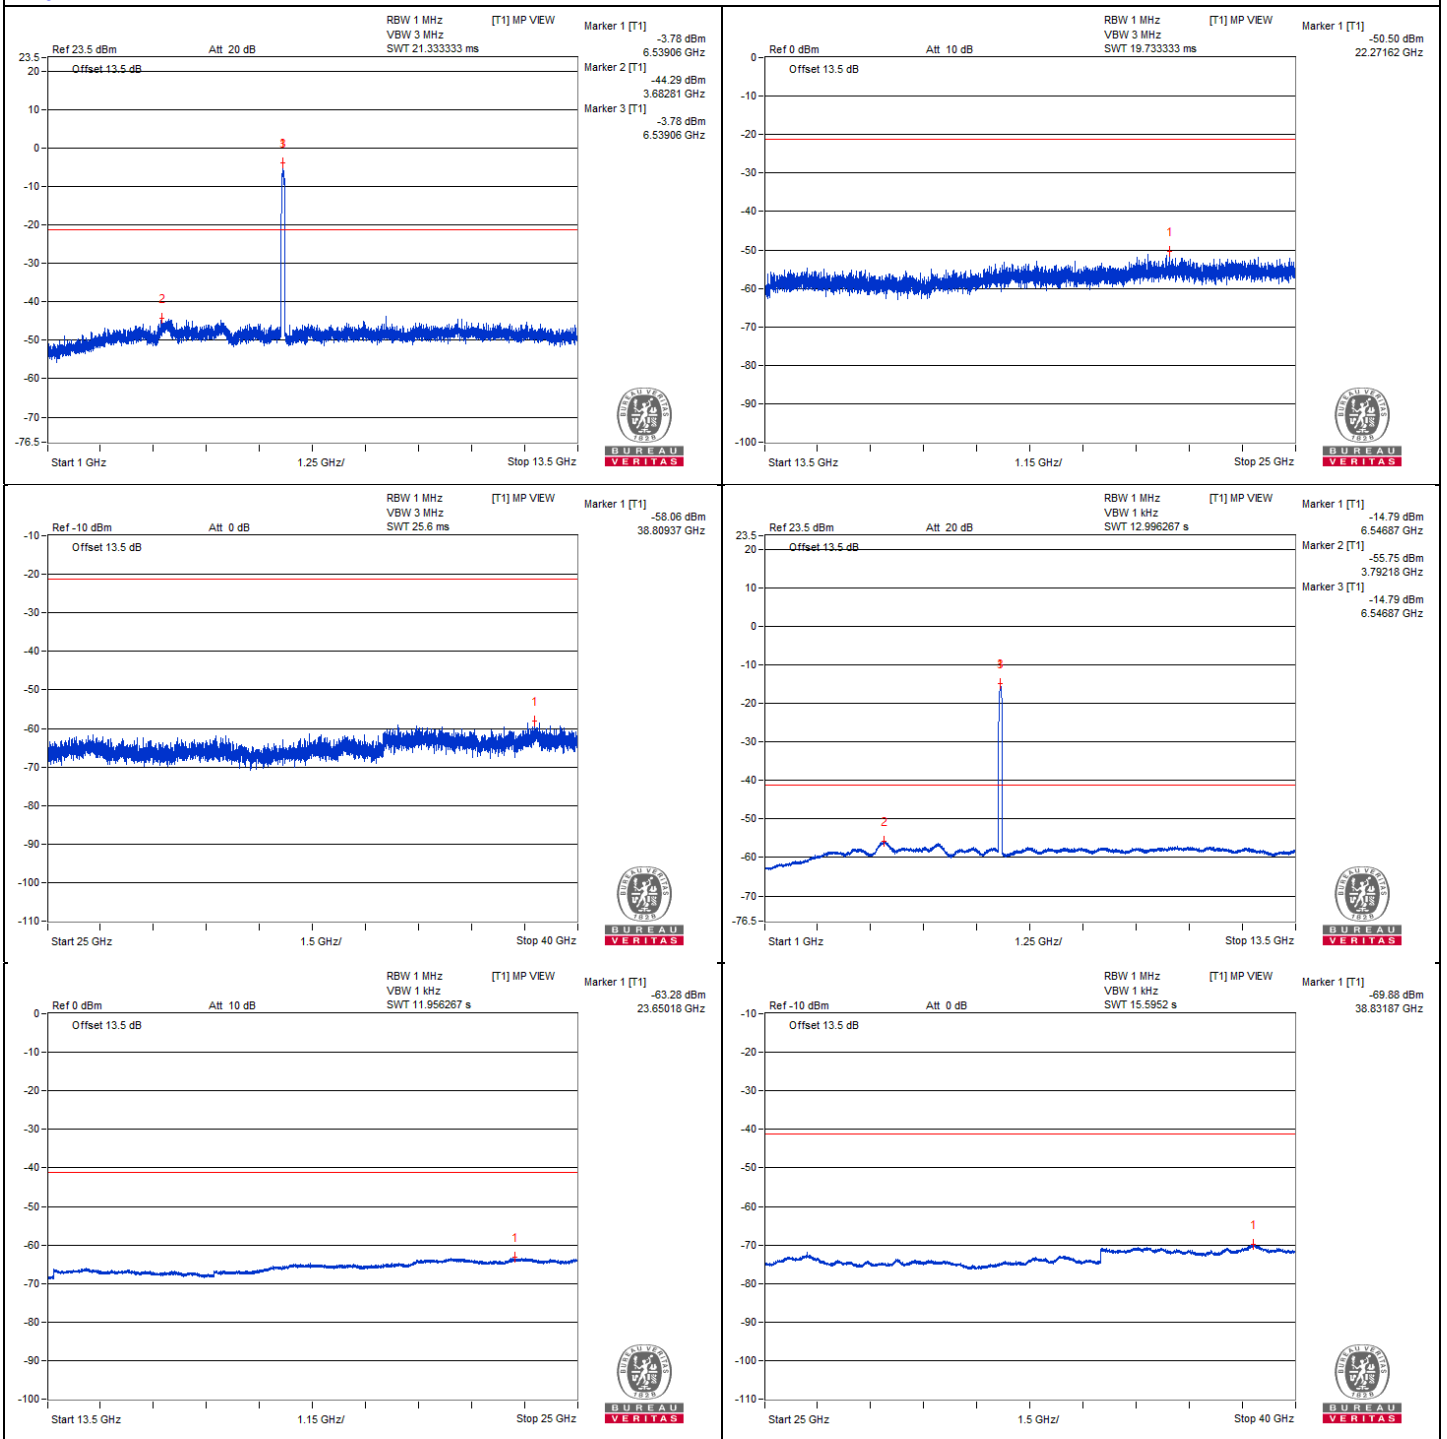



### 802.11be (EHT80) - Channel 151

#### Conducted spurious emission table


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #13415.62       | 58.92 PK                | 88.2           | -29.28      | -47.99          | -47.09 | 8.17                   | -36.34           |
| 2   | #13409.37       | 47.9 AV                 | 68.2           | -20.3       | -58.41          | -58.67 | 8.17                   | -47.36           |
| 3   | 20124           | 50.86 PK                | 74             | -23.14      | -54.88          | -56.42 | 8.17                   | -44.40           |
| 4   | 20106.75        | 41.11 AV                | 54             | -12.89      | -65.36          | -65.3  | 8.17                   | -54.15           |

#### Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




### Chain 0

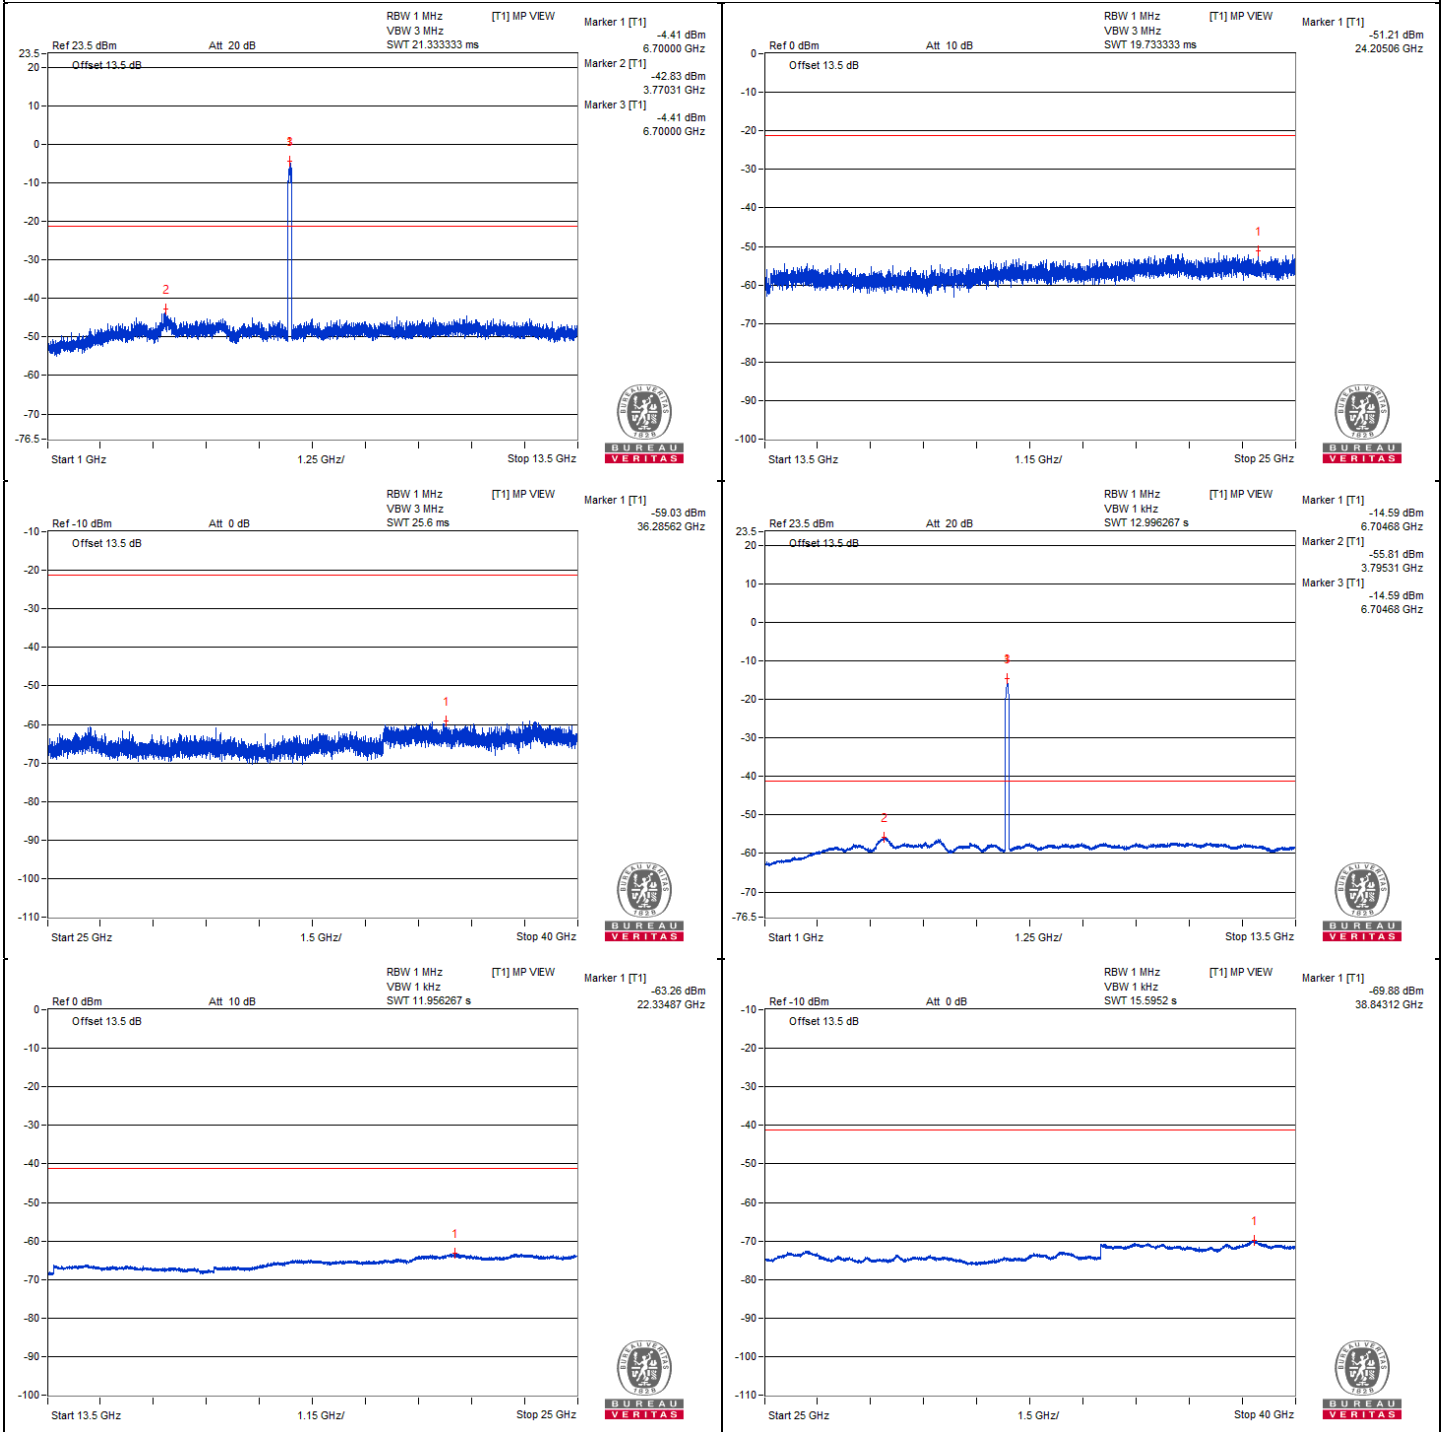



### Chain 1

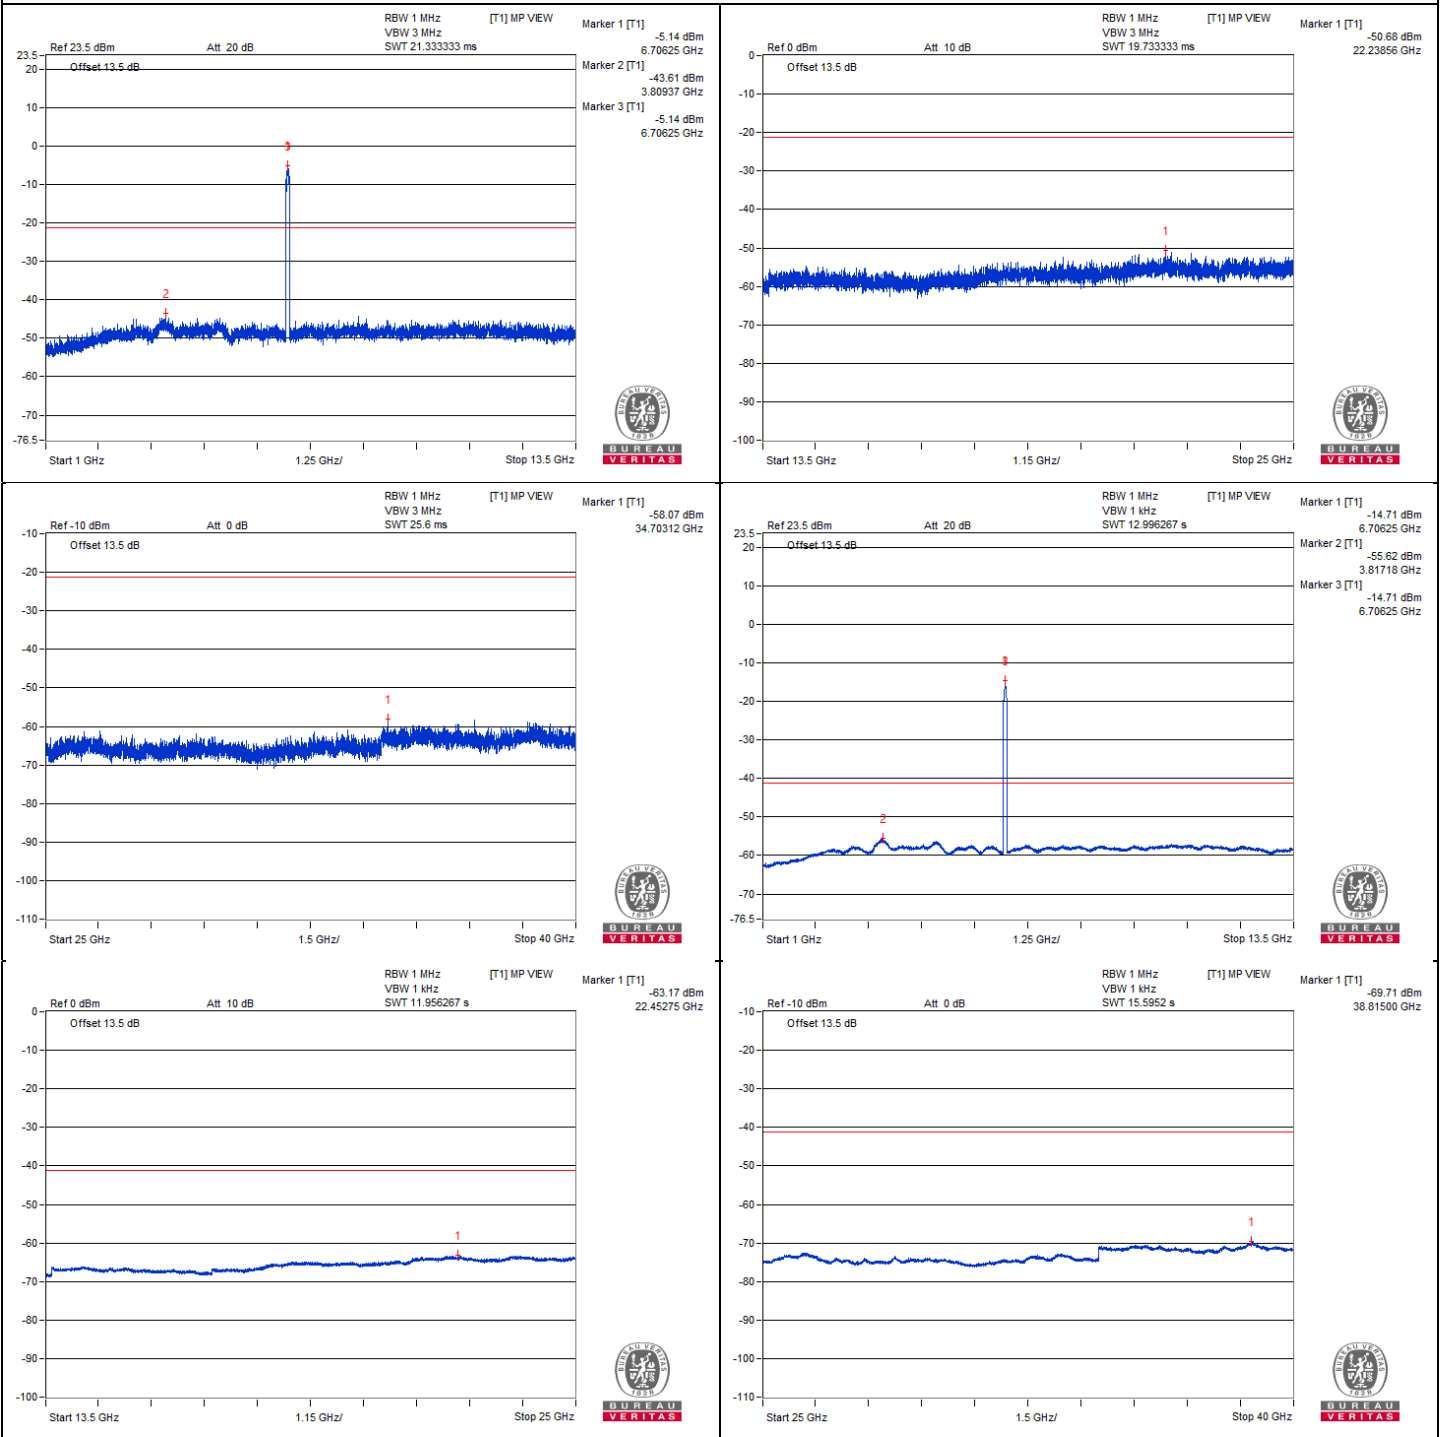

**802.11be (EHT80) - Channel 183**
**Conducted spurious emission table**


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #13737.18       | 50.17 PK                | 88.2           | -38.03      | -56.99          | -55.65 | 8.17                   | -45.09           |
| 2   | #13730          | 39.39 AV                | 68.2           | -28.81      | -67.08          | -67.02 | 8.17                   | -55.87           |
| 3   | 20592.62        | 50 PK                   | 74             | -24         | -55.22          | -58.14 | 8.17                   | -45.26           |
| 4   | 20601.25        | 41.04 AV                | 54             | -12.96      | -65.2           | -65.6  | 8.17                   | -54.22           |

**Remarks:**

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




### Chain 0

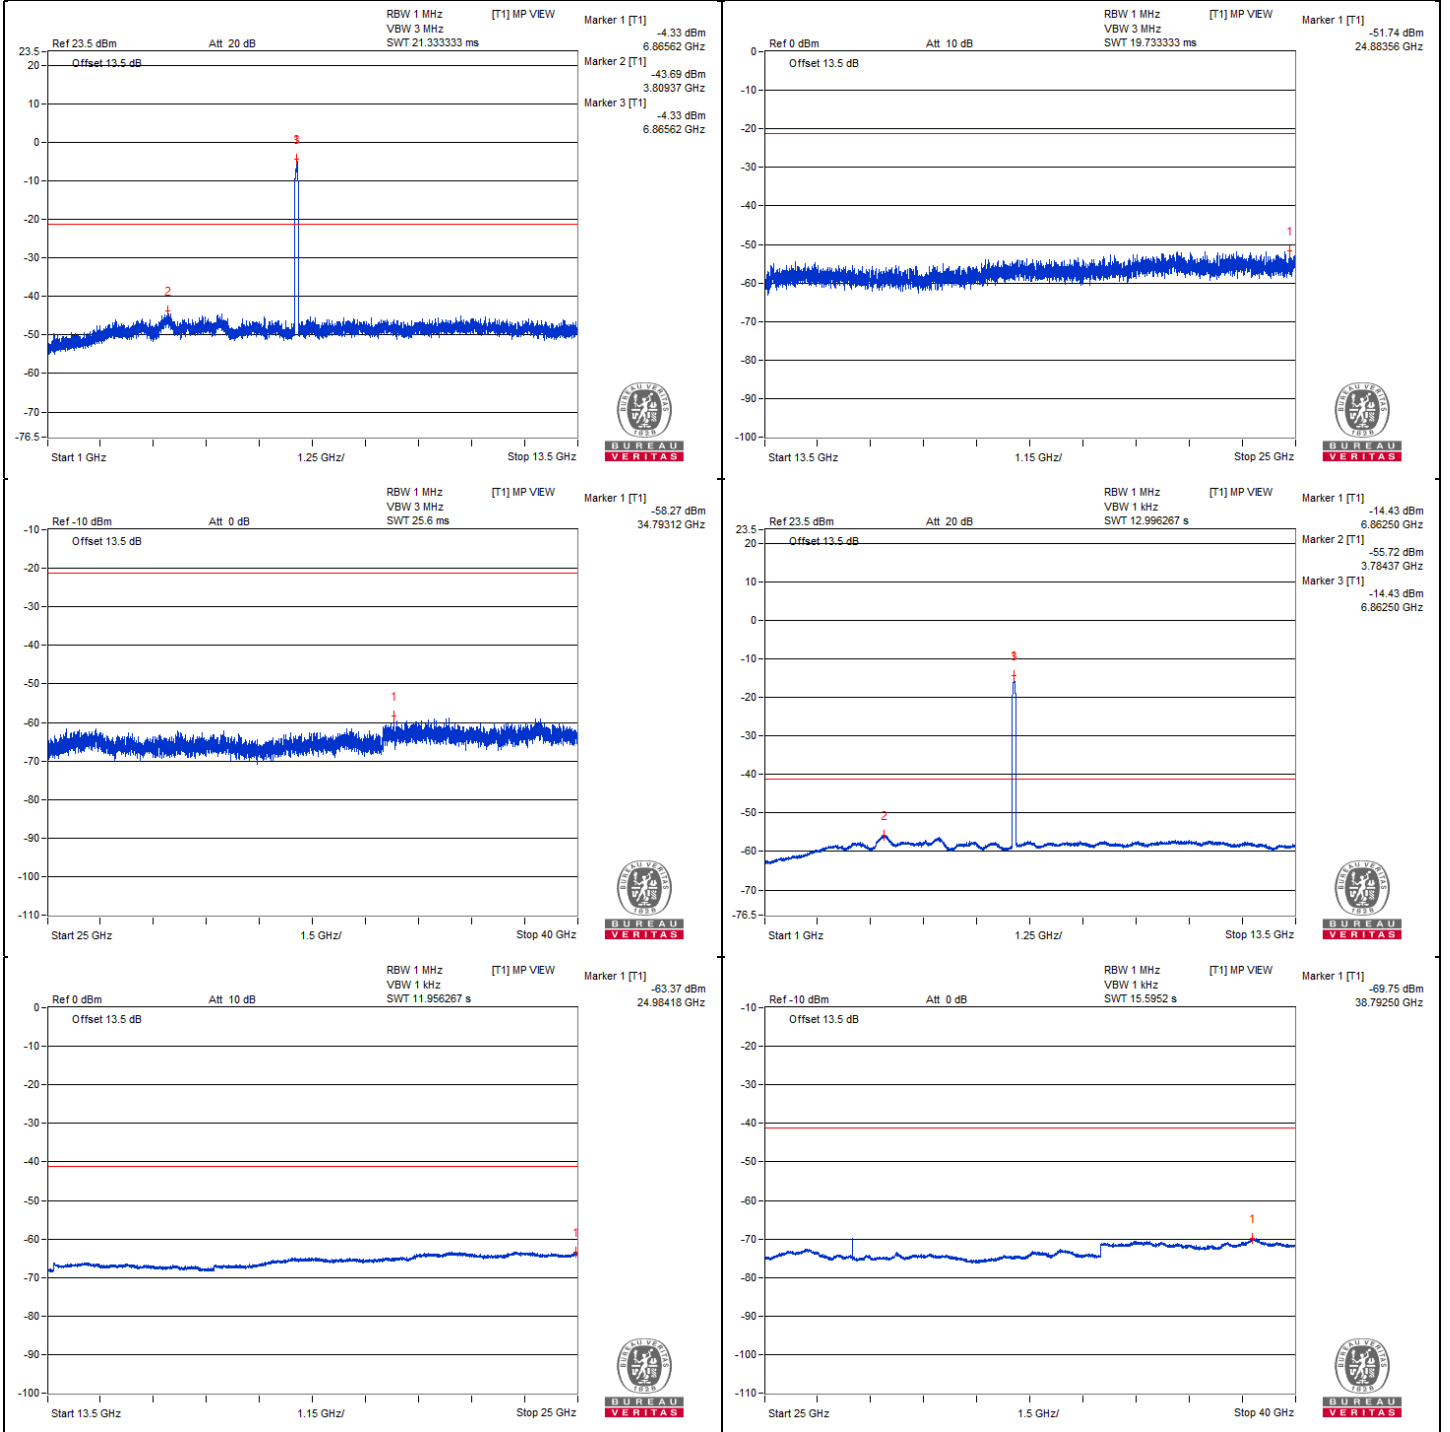



### Chain 1

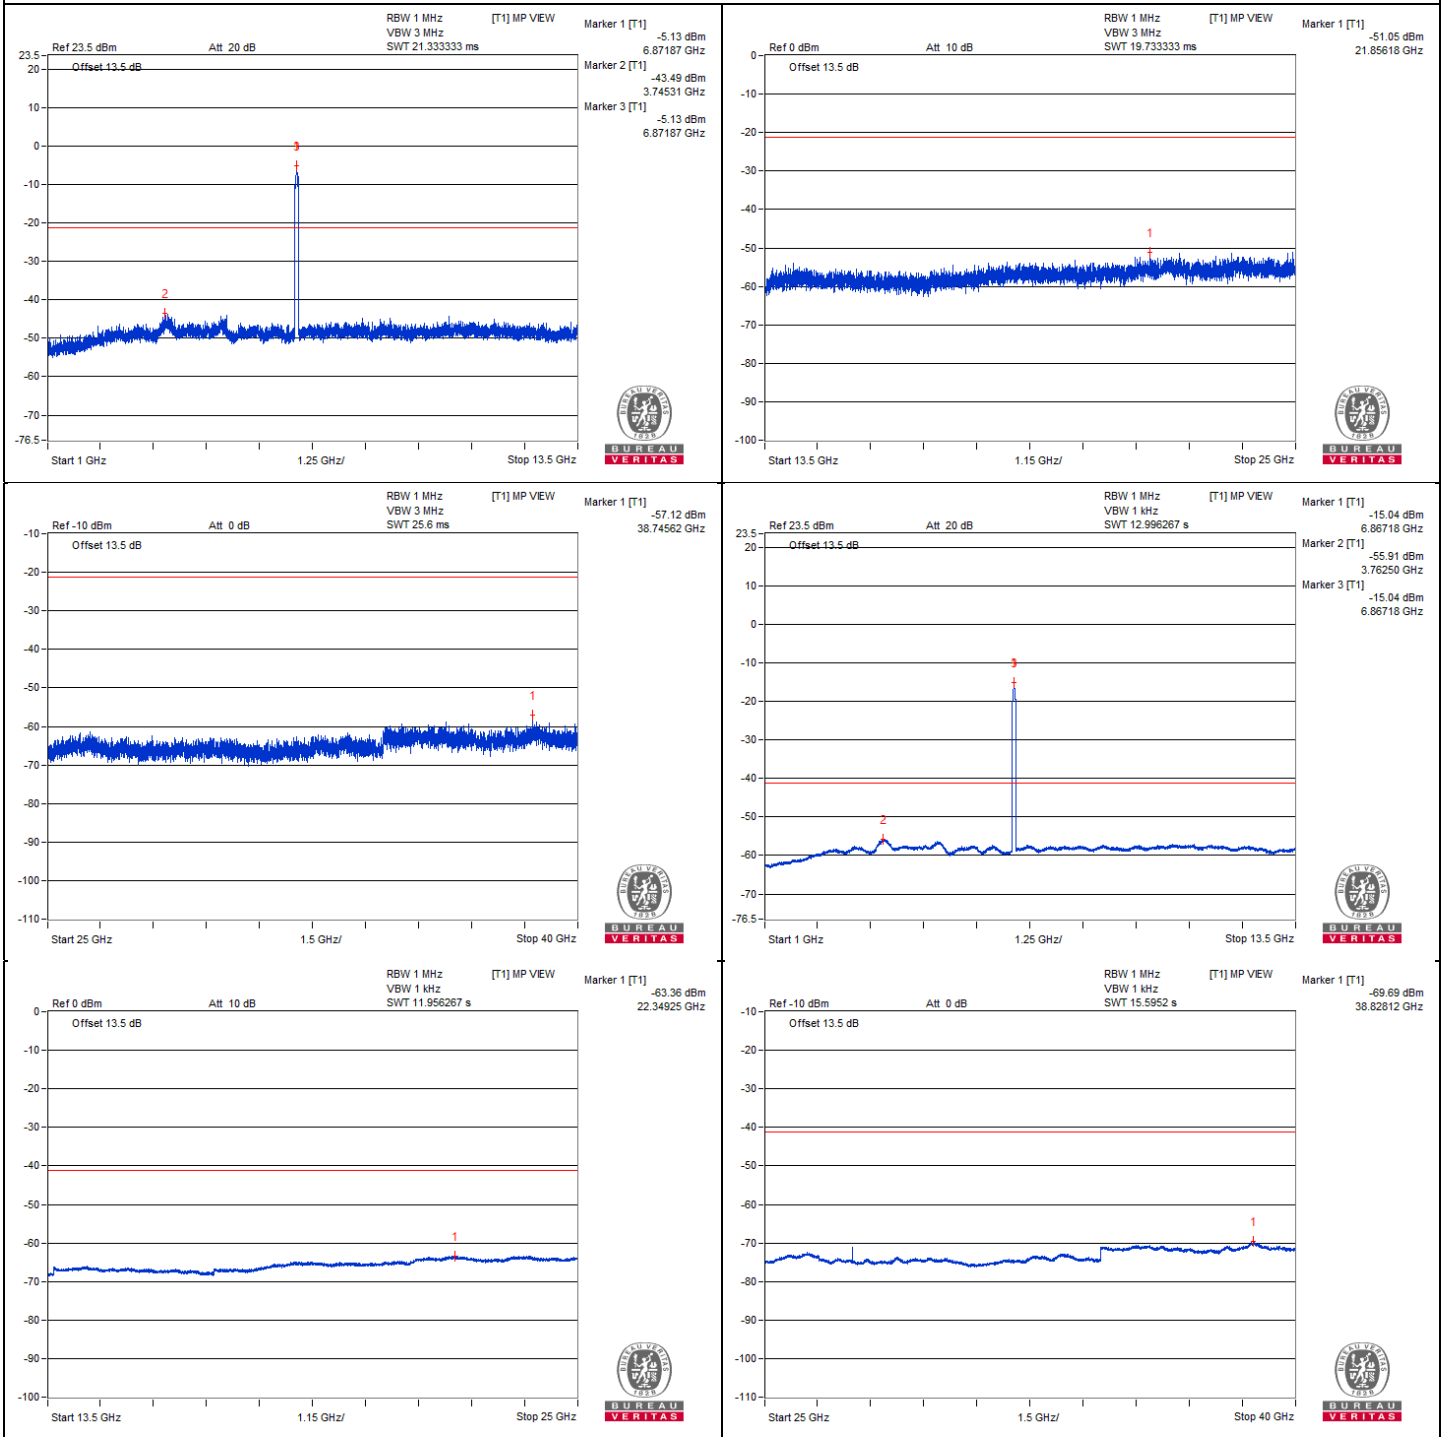

### 802.11be (EHT80) - Channel 199

#### Conducted spurious emission table







| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #13893.87       | 49.06 PK                | 88.2           | -39.14      | -56.55          | -58.42 | 8.17                   | -46.20           |
| 2   | #13895.31       | 39.61 AV                | 68.2           | -28.59      | -66.84          | -66.82 | 8.17                   | -55.65           |
| 3   | 20825.5         | 52.81 PK                | 74             | -21.19      | -55             | -52.59 | 8.17                   | -42.45           |
| 4   | 20839.87        | 41.35 AV                | 54             | -12.65      | -64.89          | -65.31 | 8.17                   | -53.91           |

#### Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




### Chain 0

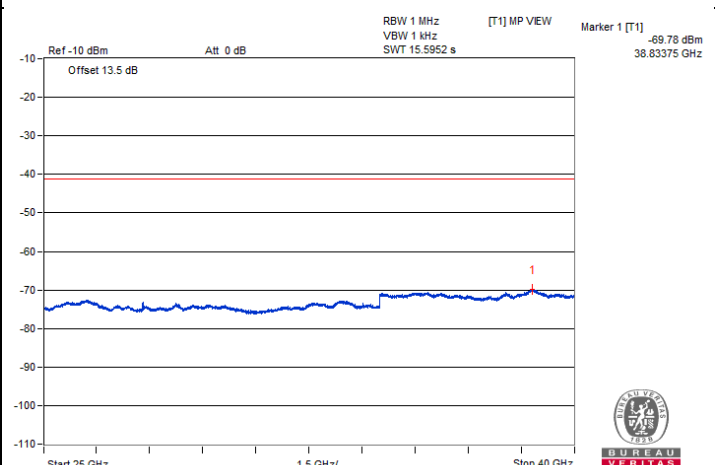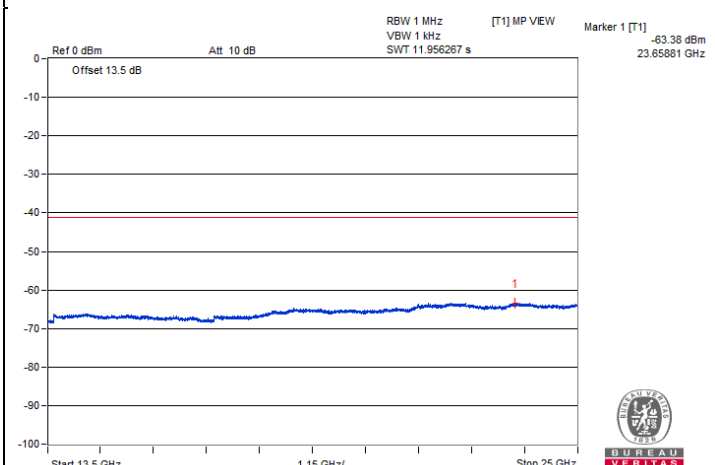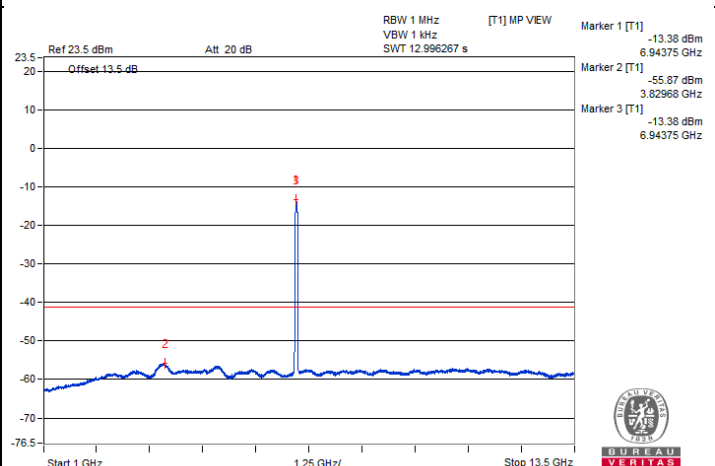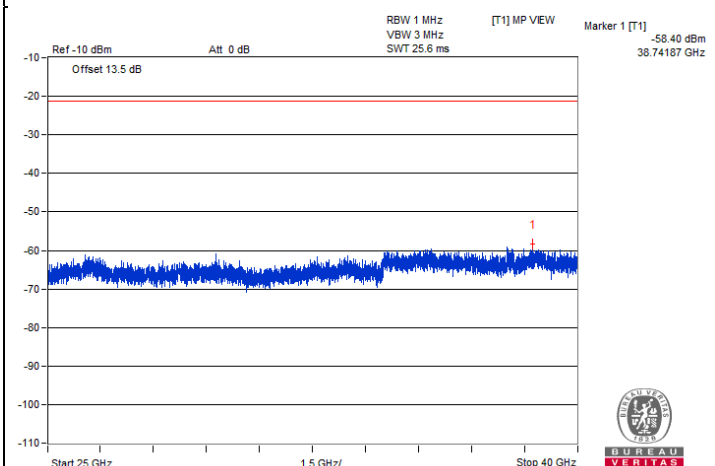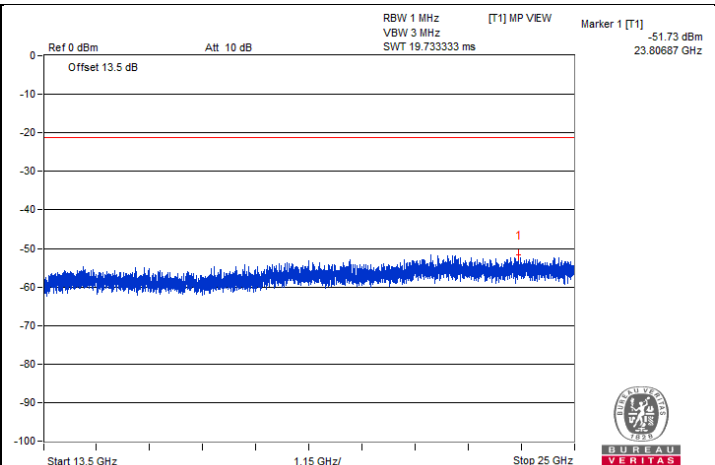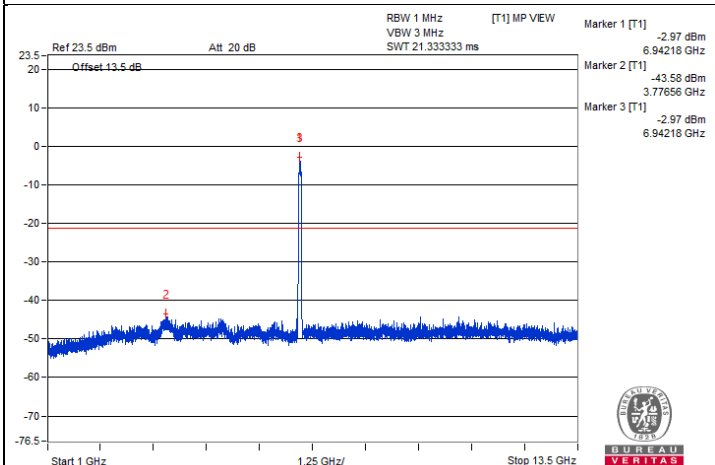





### Chain 1

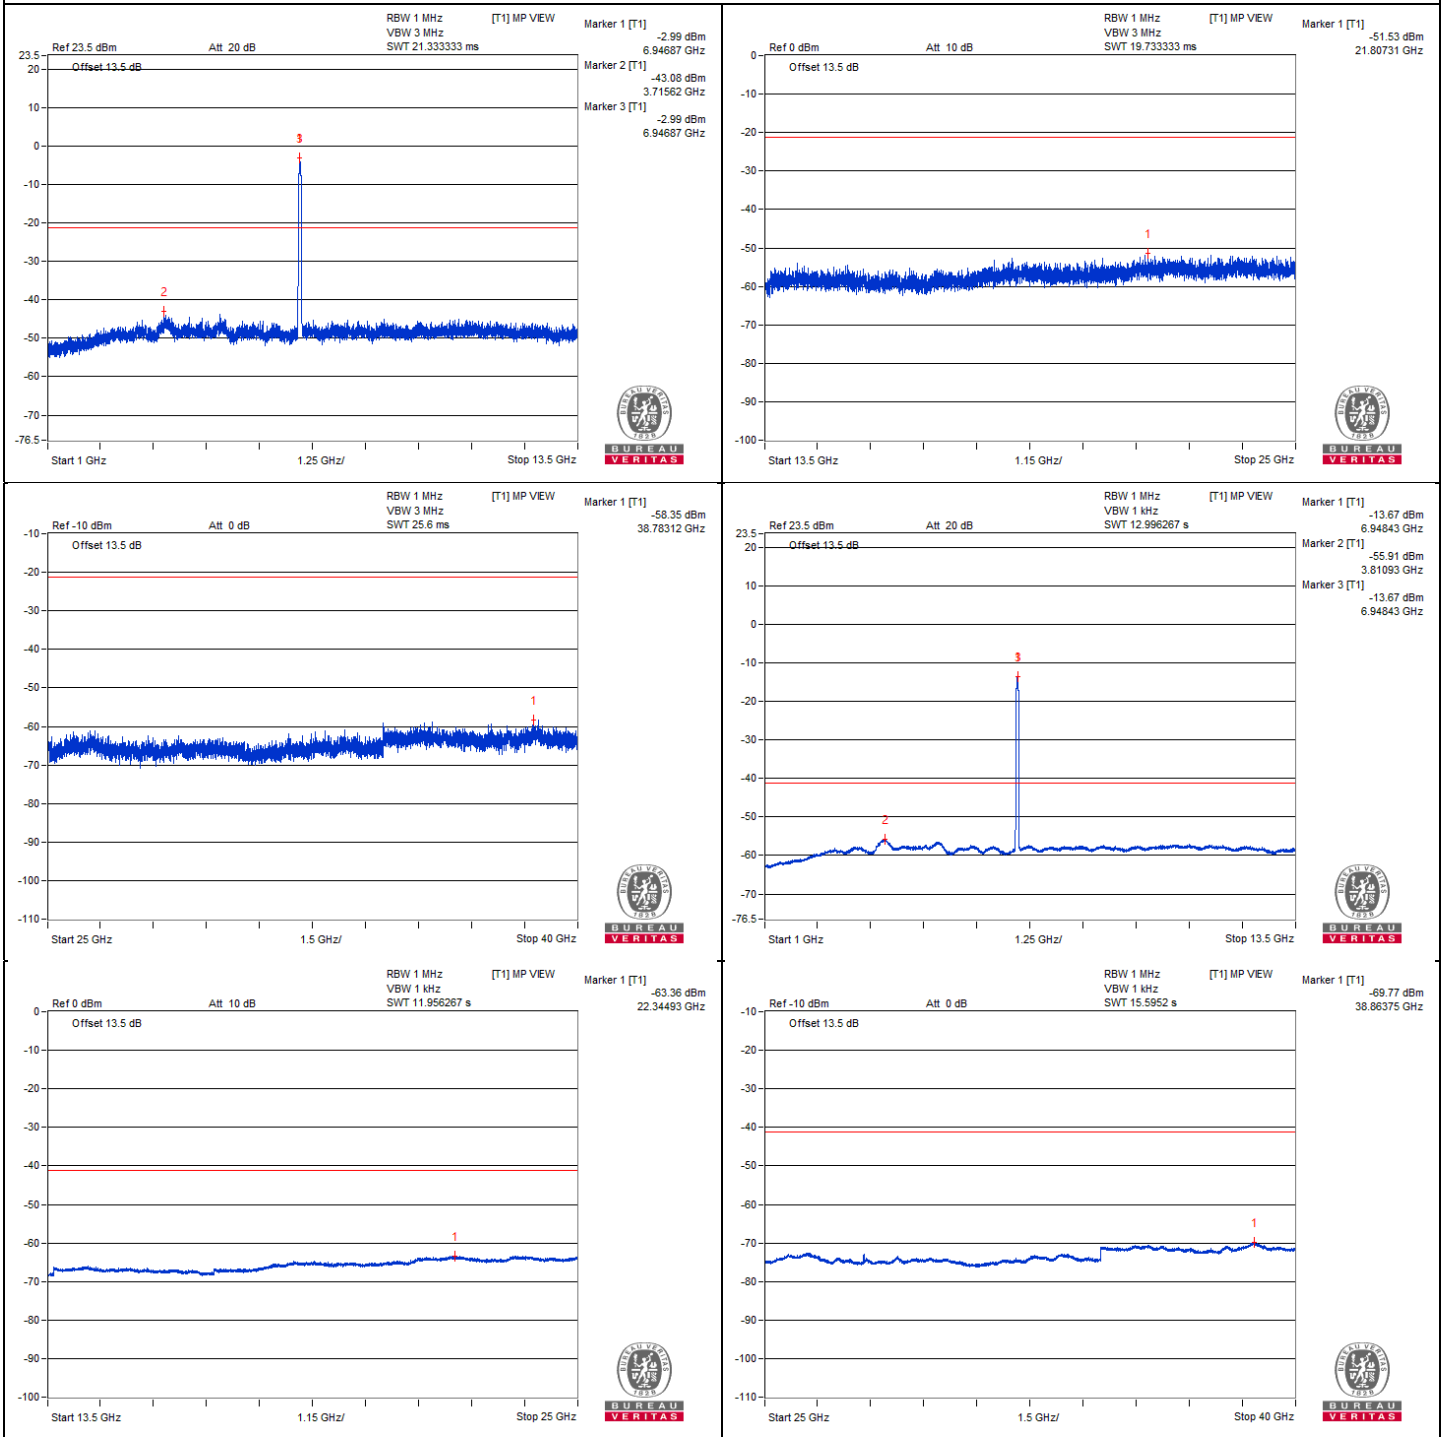

**802.11be (EHT80) - Channel 215**
**Conducted spurious emission table**







| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #14056.31       | 49.48 PK                | 88.2           | -38.72      | -56.58          | -57.38 | 8.17                   | -45.78           |
| 2   | #14050.56       | 39.83 AV                | 68.2           | -28.37      | -66.8           | -66.43 | 8.17                   | -55.43           |
| 3   | 21067           | 52 PK                   | 74             | -22         | -53.92          | -55.03 | 8.17                   | -43.26           |
| 4   | 21071.31        | 41.37 AV                | 54             | -12.63      | -65.08          | -65.07 | 8.17                   | -53.89           |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.




### Chain 0

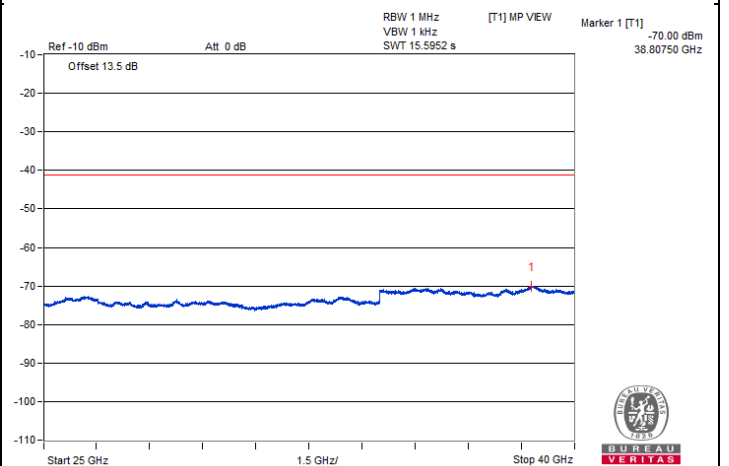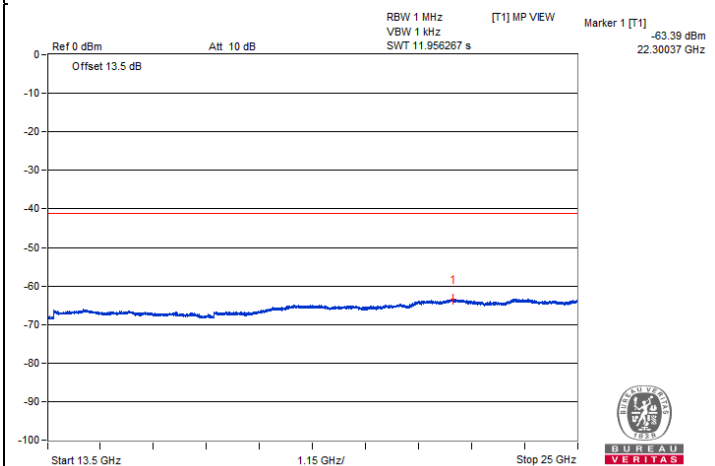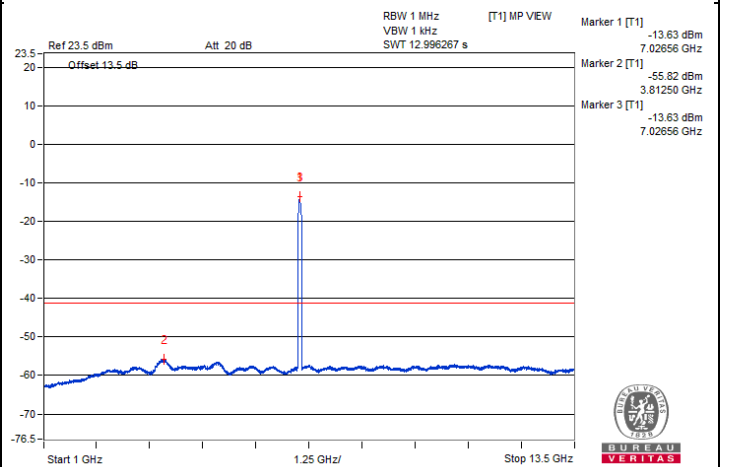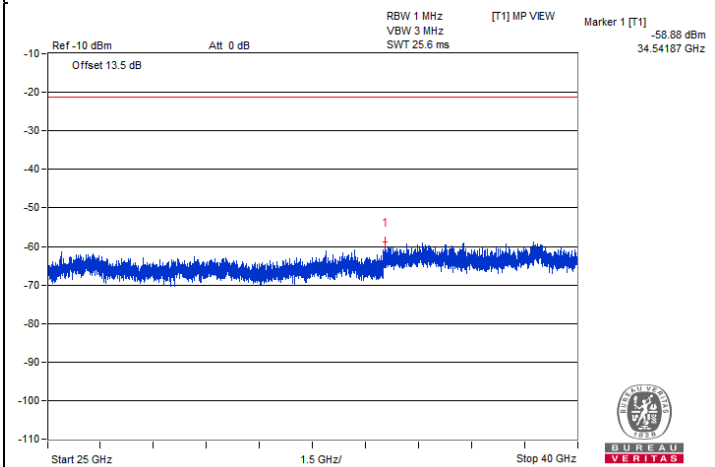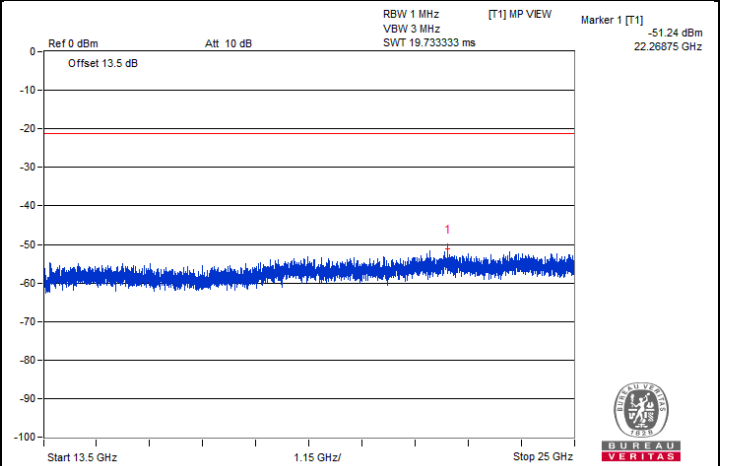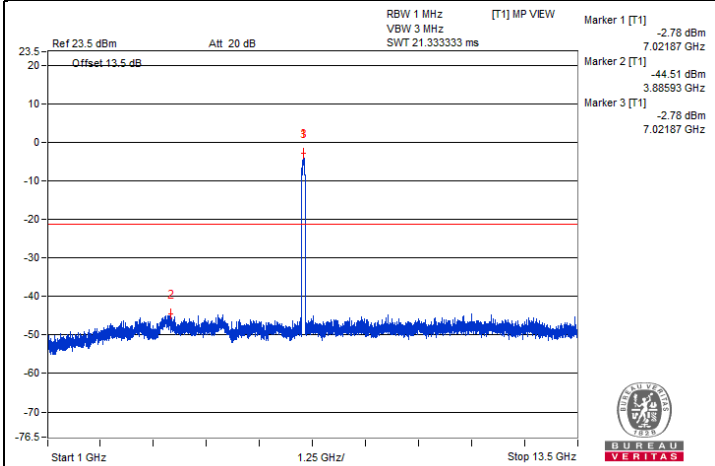



### Chain 1

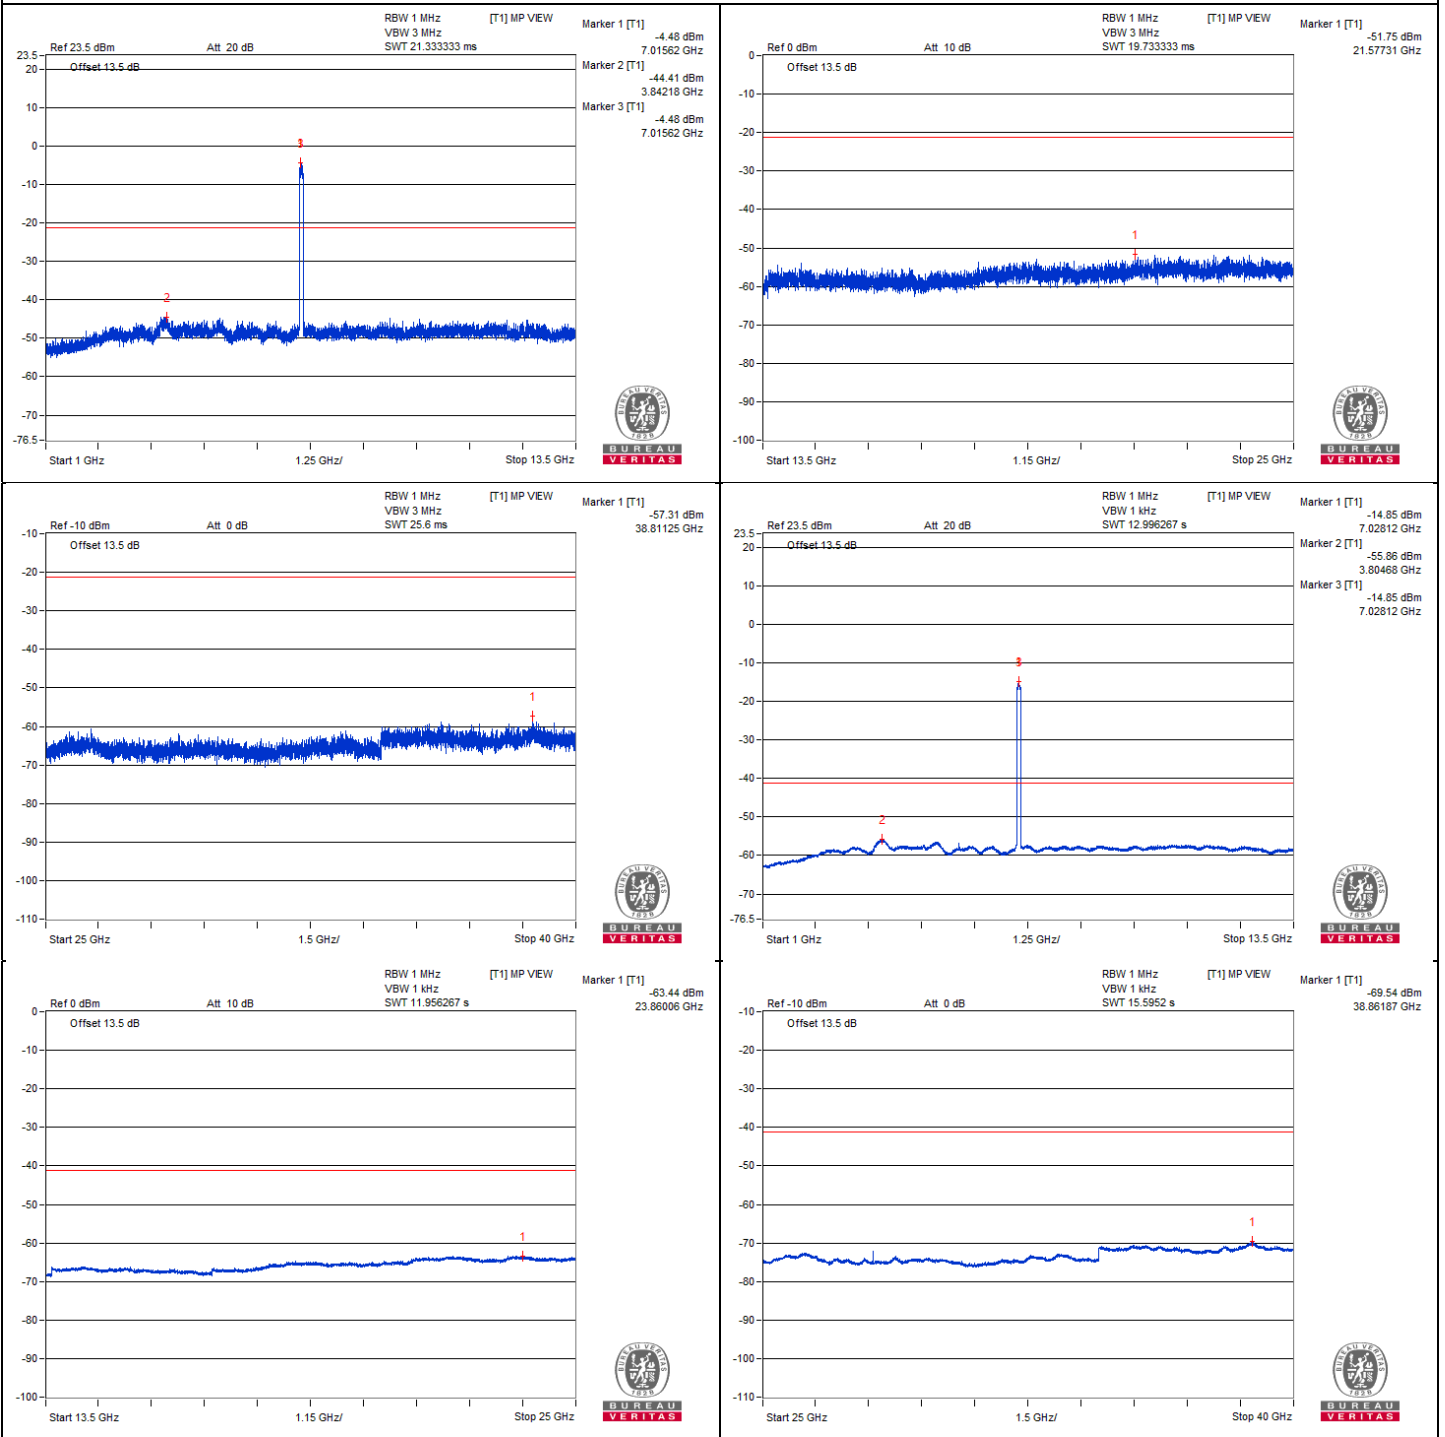


**Bandedge table**

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #7180.65        | 51.45 PK                | 88.2           | -36.75      | -53.49          | -57.17 | 8.13                   | -43.81           |
| 2   | #7125.45        | 39.22 AV                | 68.2           | -28.98      | -67.01          | -67.35 | 8.13                   | -56.04           |


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. "#": The frequency is out of the restricted band.

**Chain 0**

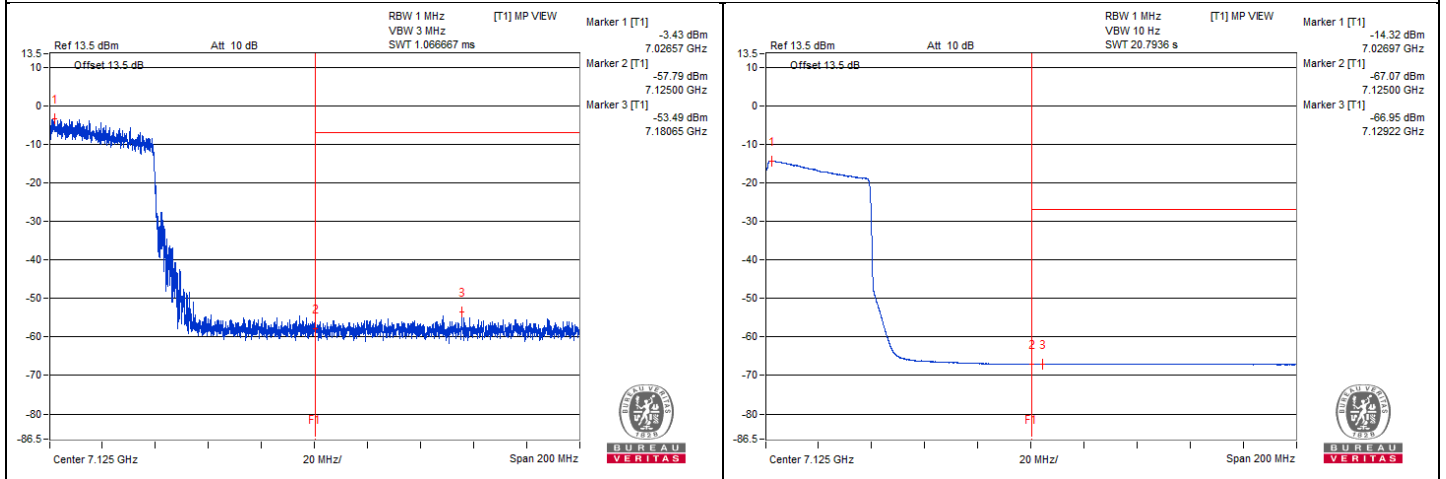

**Chain 1**

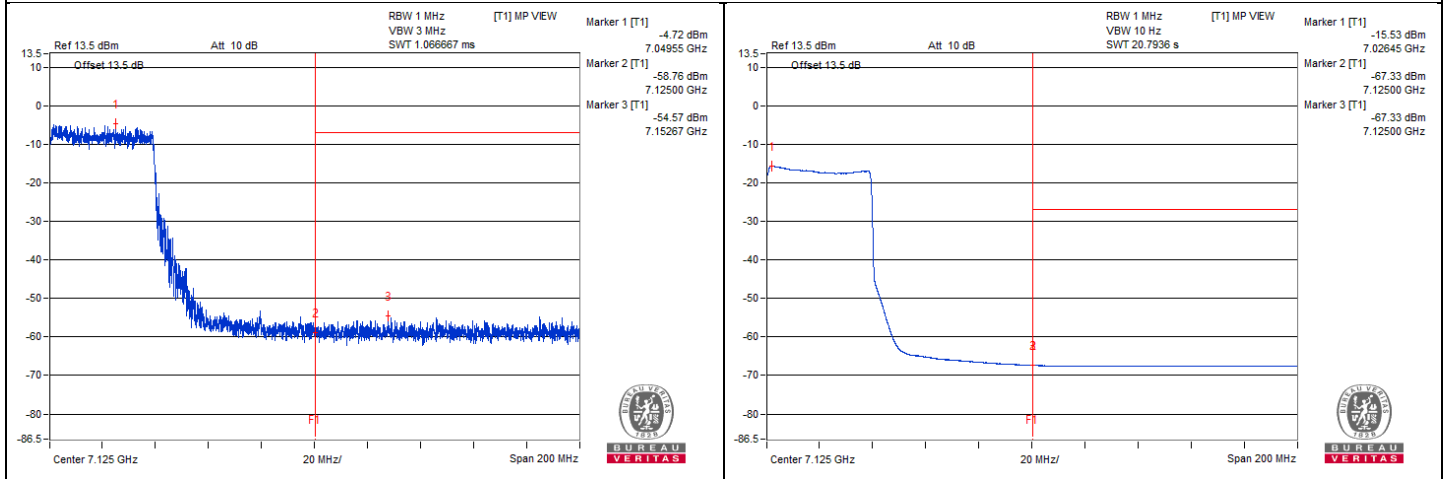

### 802.11be (EHT160) - Channel 15

#### Conducted spurious emission table


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 12048.43        | 58.43 PK                | 74             | -15.57      | -47.74          | -48.3  | 8.17                   | -36.83           |
| 2   | 12053.12        | 47.95 AV                | 54             | -6.05       | -58.5           | -58.49 | 8.17                   | -47.31           |
| 3   | 18079.87        | 50.02 PK                | 74             | -23.98      | -56.75          | -56.11 | 8.17                   | -45.24           |
| 4   | 18066.93        | 39.86 AV                | 54             | -14.14      | -66.44          | -66.72 | 8.17                   | -55.40           |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.




### Chain 0

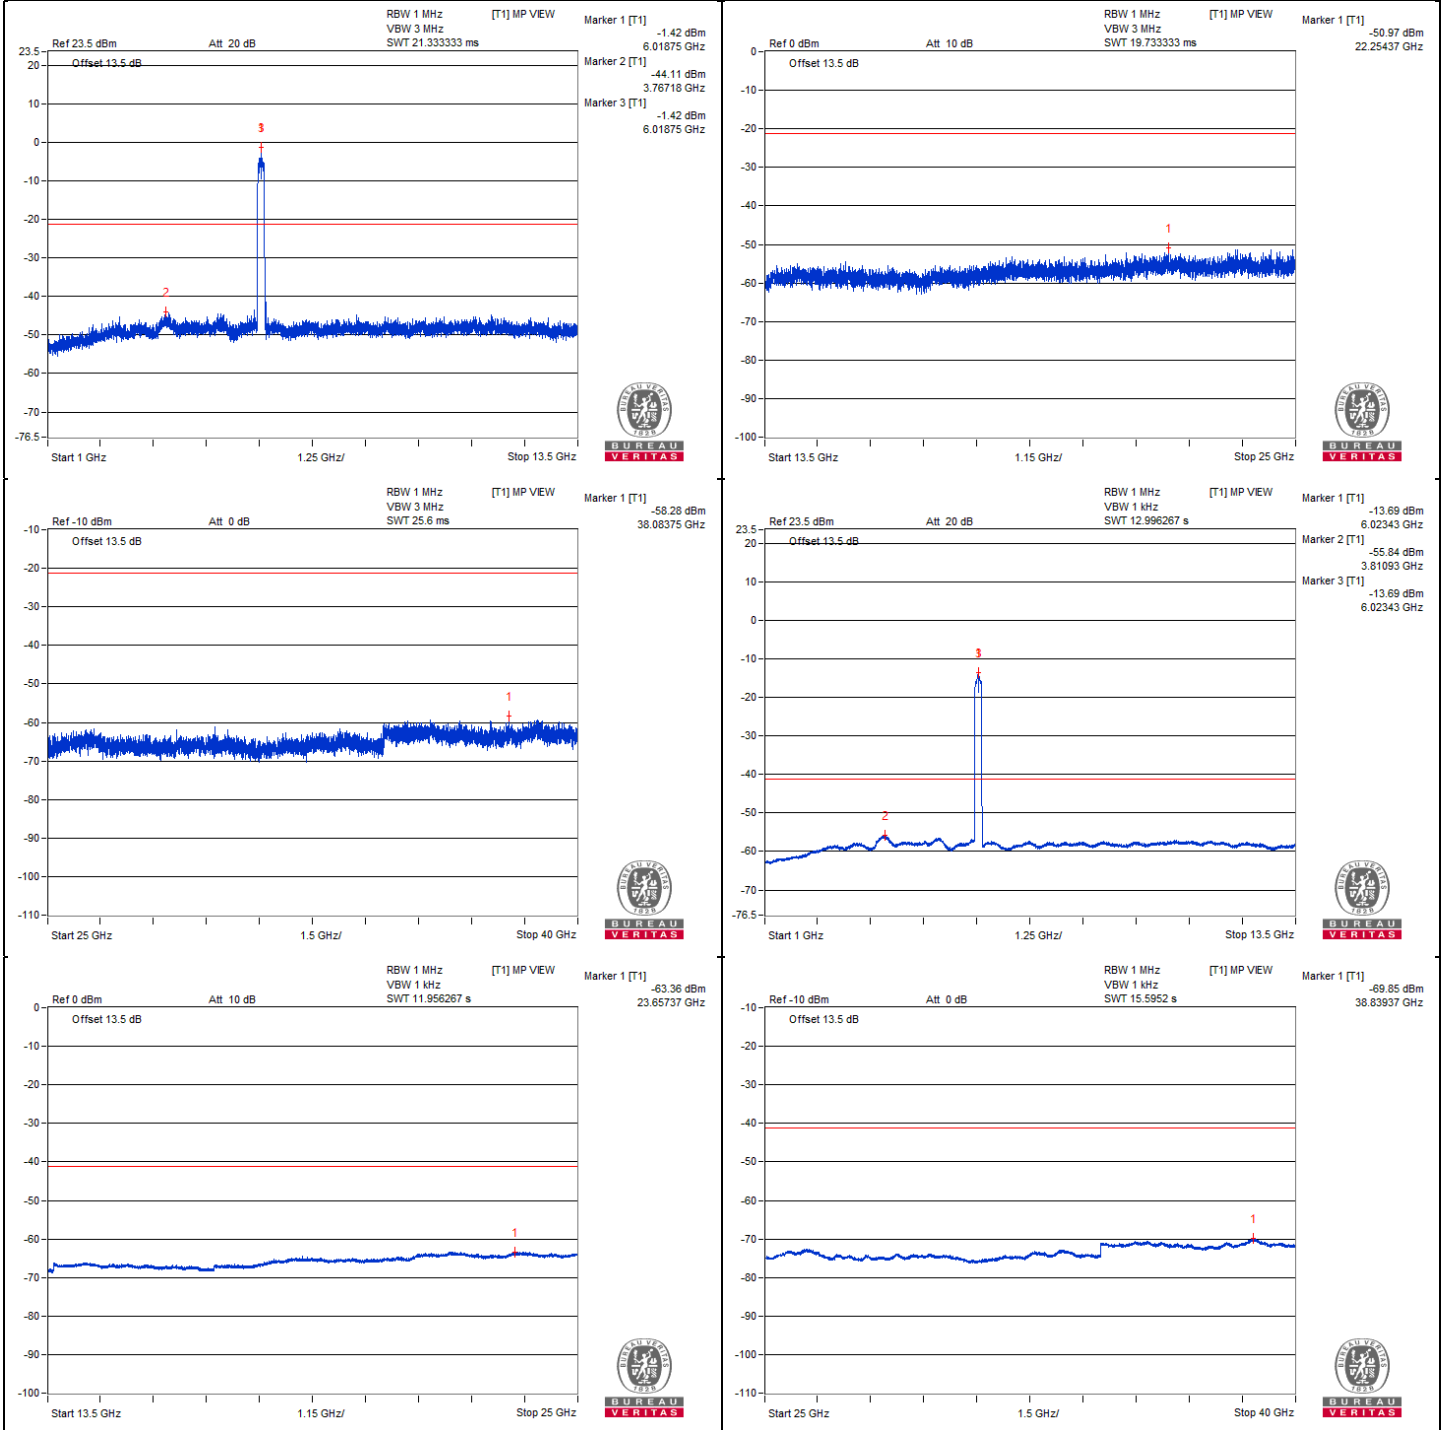



### Chain 1

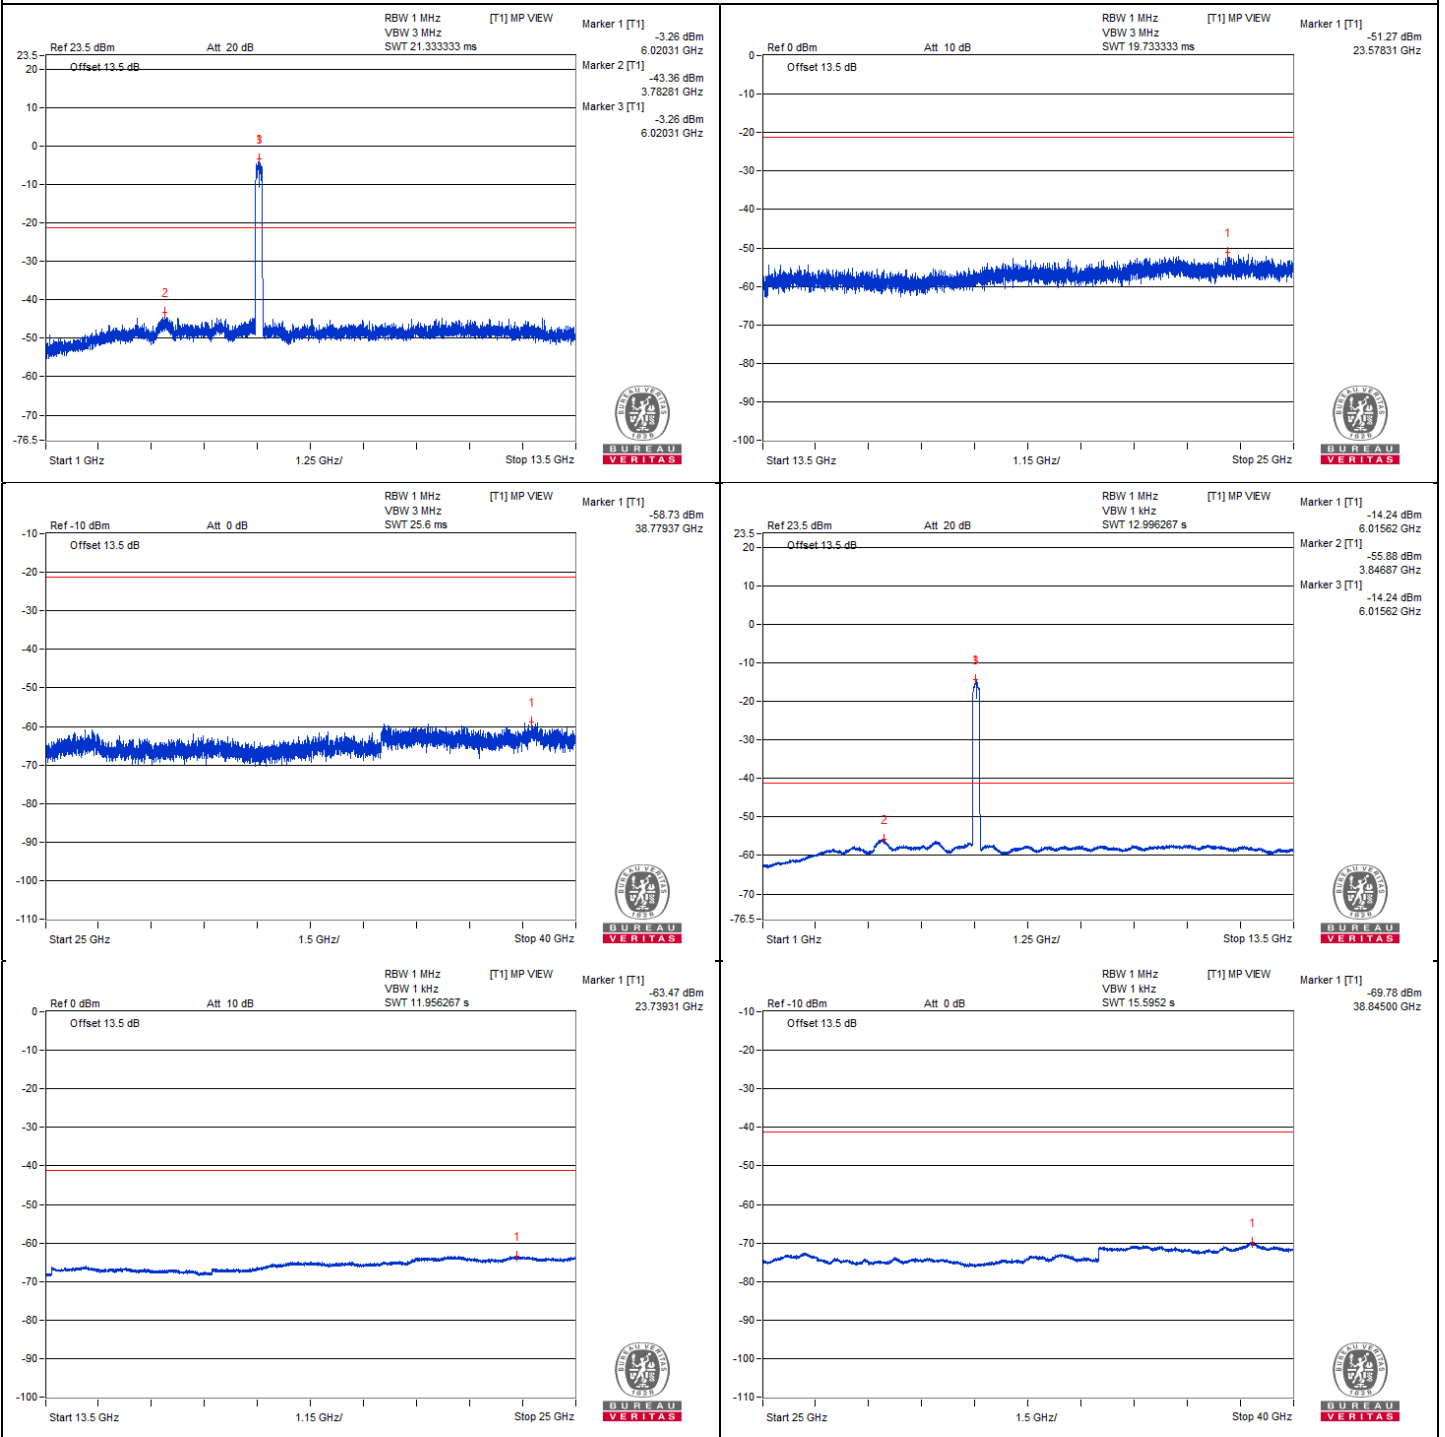






### Bandedge table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #5920.92        | 65.97 PK                | 88.2           | -22.23      | -46.74          | -37.98 | 8.15                   | -29.29           |
| 2   | #5859.15        | 42.92 AV                | 68.2           | -25.28      | -64             | -63.05 | 8.15                   | -52.34           |


#### Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

### Chain 0

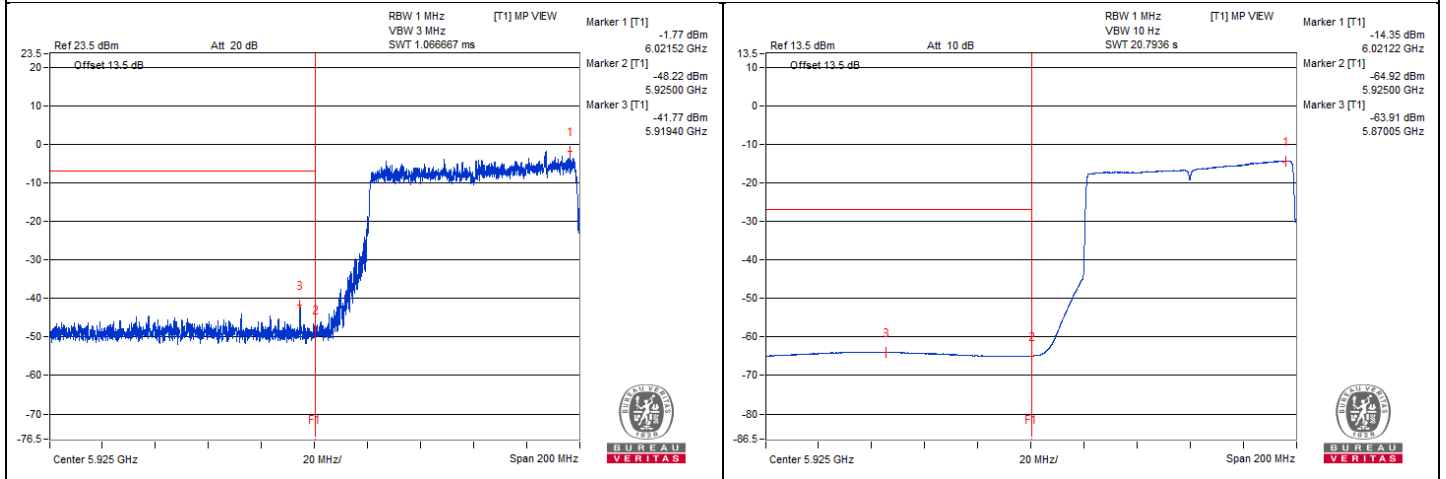

### Chain 1

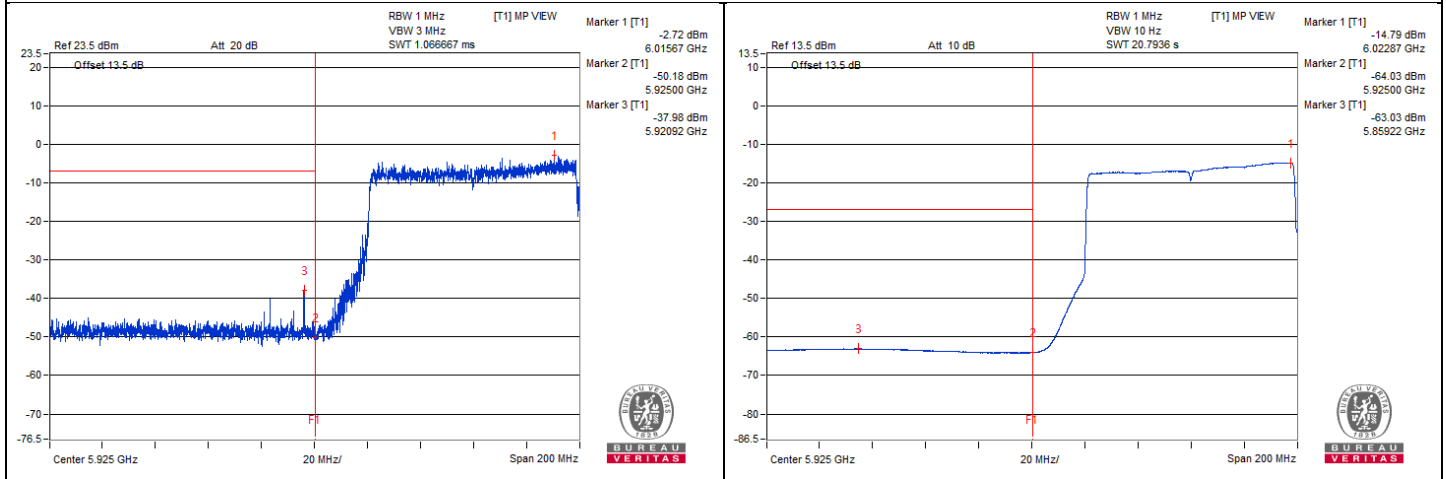

**802.11be (EHT160) - Channel 47**
**Conducted spurious emission table**


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 12373.43        | 58.96 PK                | 74             | -15.04      | -46.82          | -48.25 | 8.17                   | -36.30           |
| 2   | 12375           | 48.63 AV                | 54             | -5.37       | -57.87          | -57.76 | 8.17                   | -46.63           |
| 3   | 18554.25        | 50.17 PK                | 74             | -23.83      | -56.85          | -55.76 | 8.17                   | -45.09           |
| 4   | 18555.68        | 40.73 AV                | 54             | -13.27      | -65.83          | -65.59 | 8.17                   | -54.53           |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.




### Chain 0

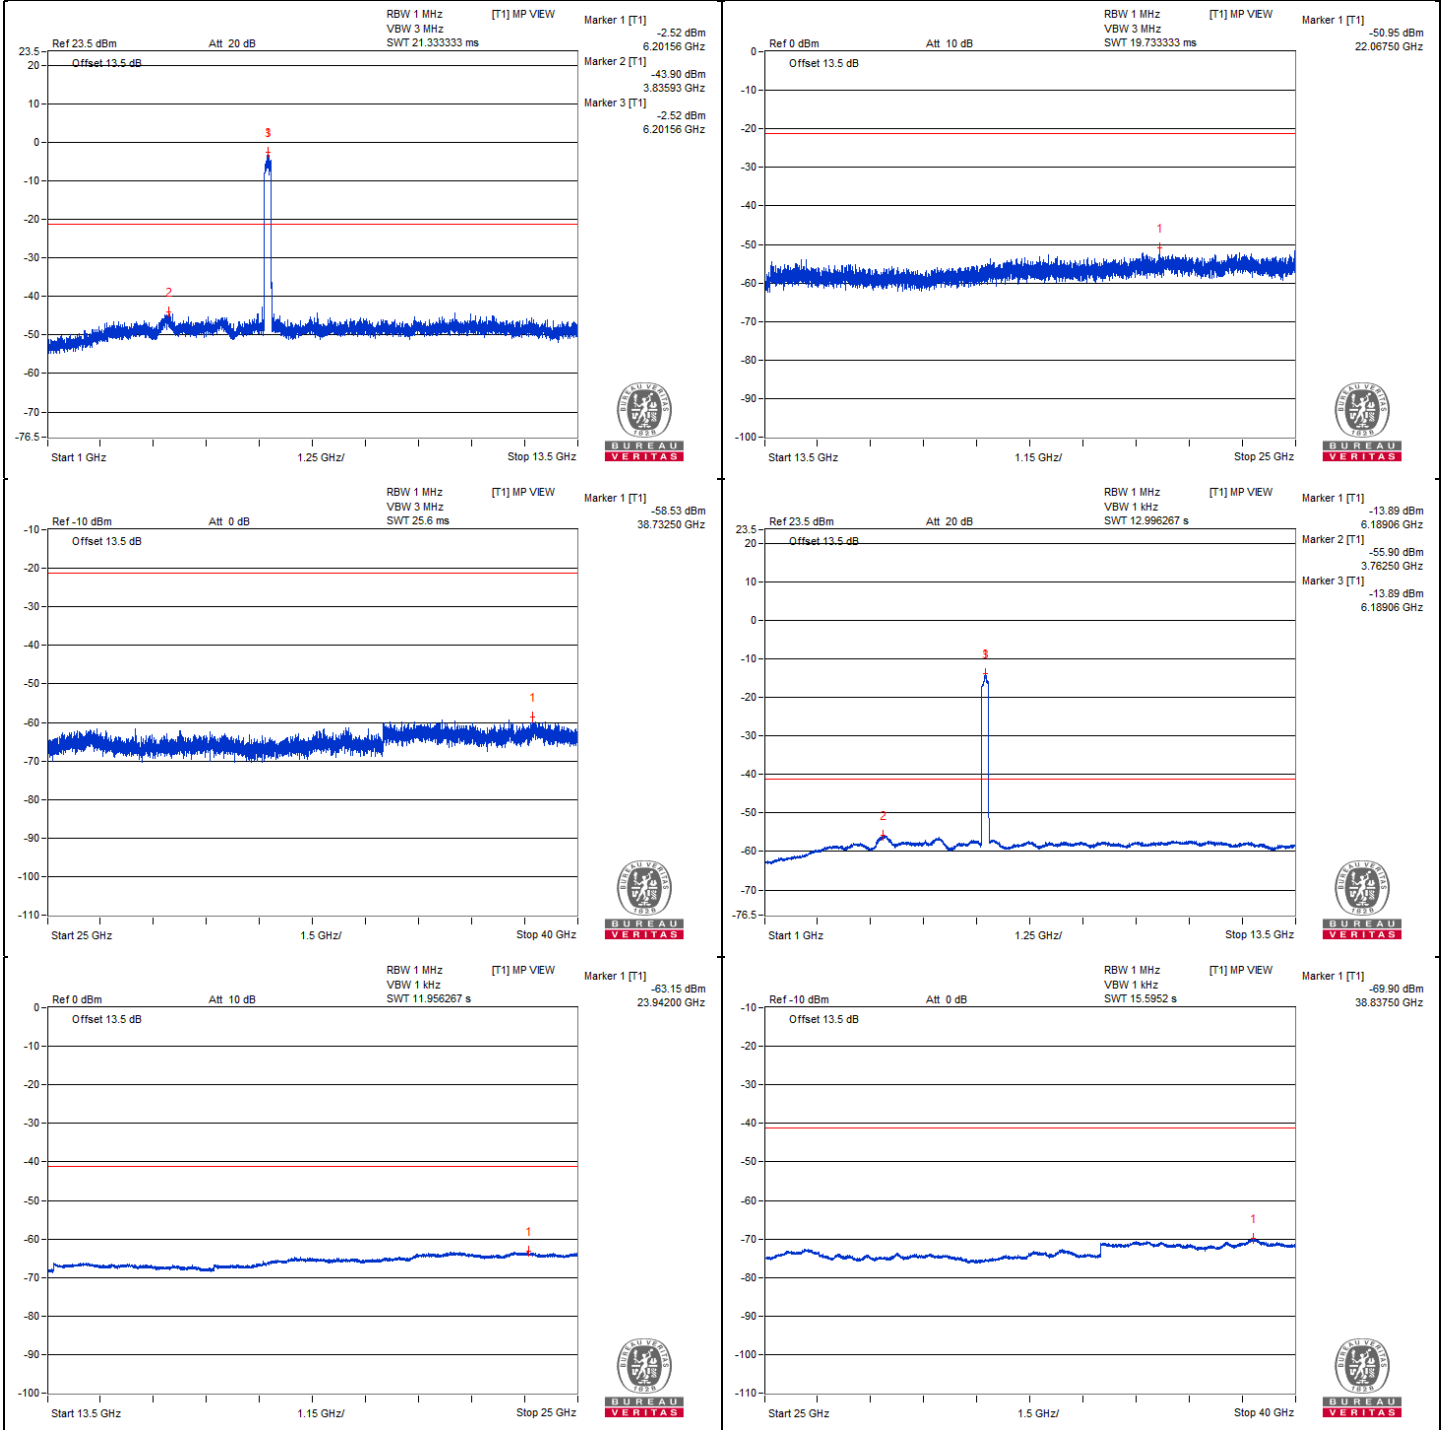



### Chain 1

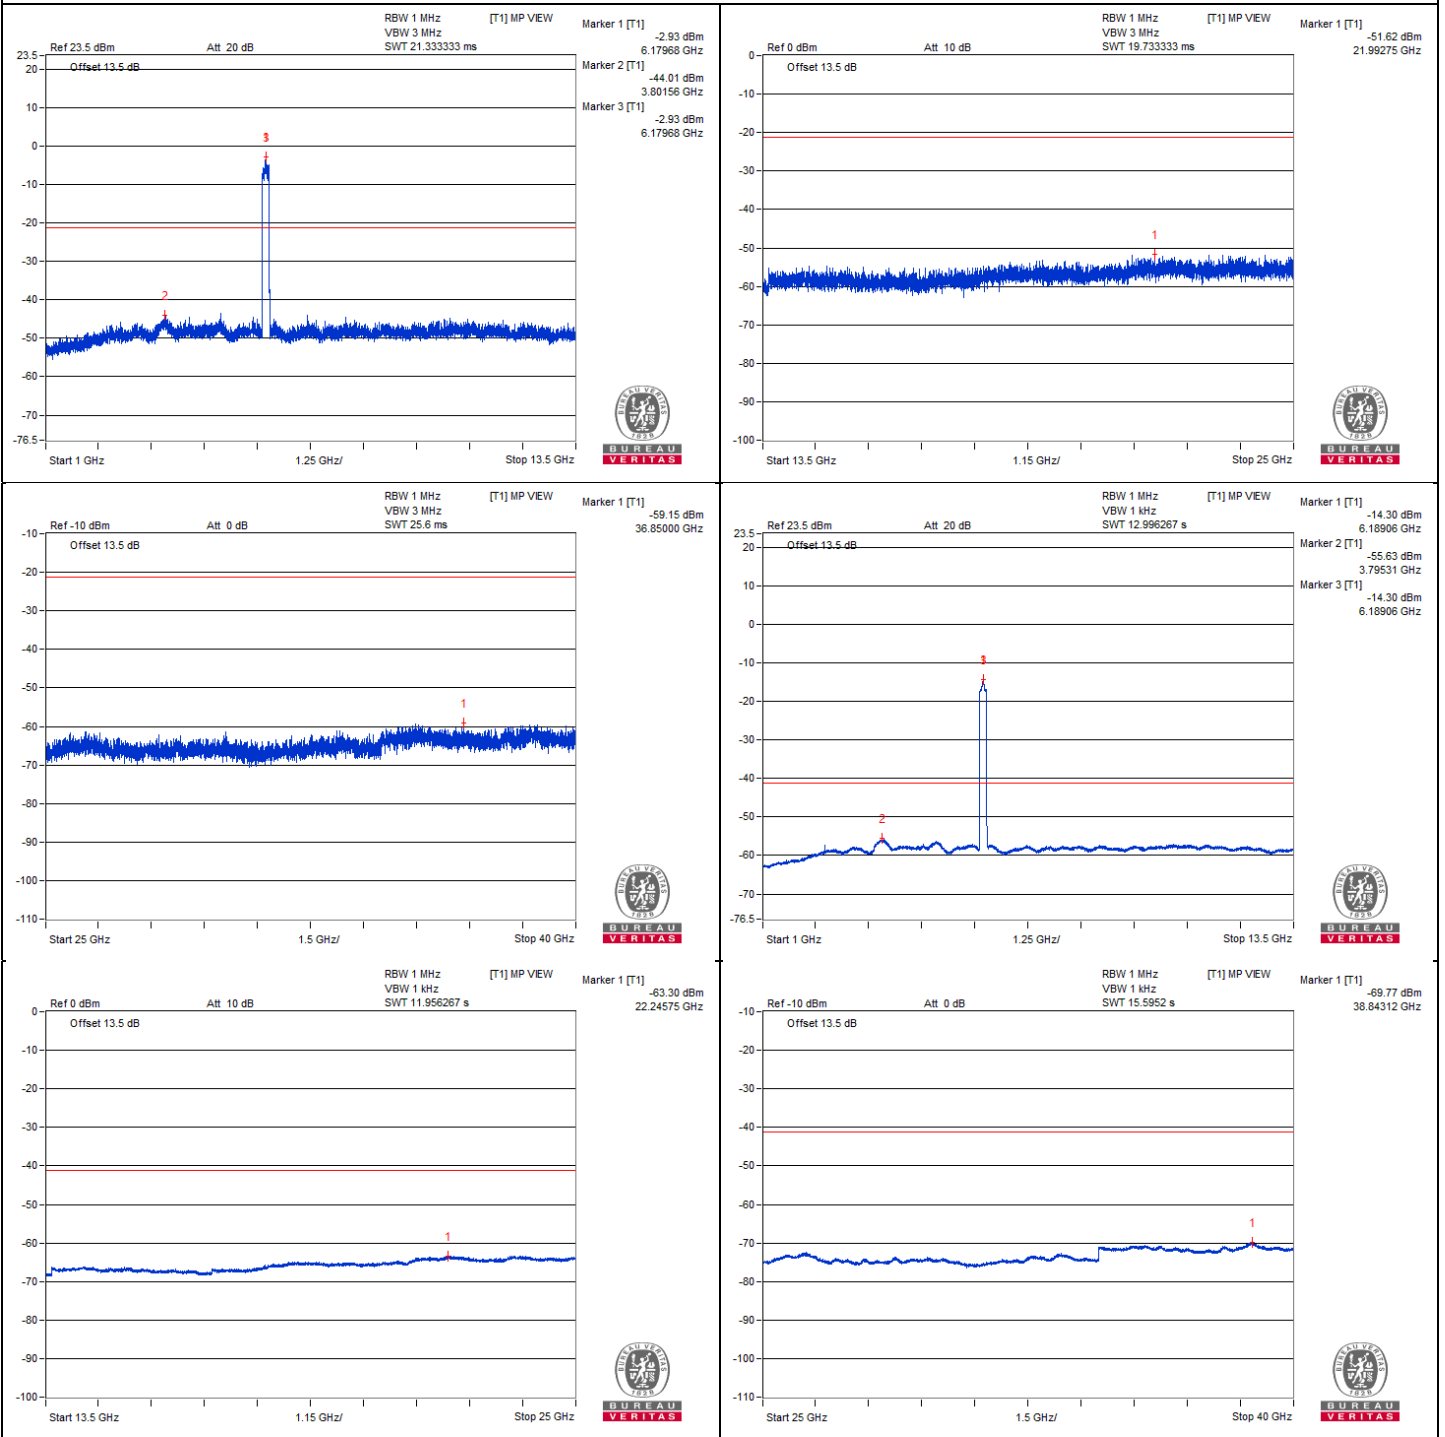

**802.11be (EHT160) – Channel 79**
**Conducted spurious emission table**







| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 12700           | 58.54 PK                | 74             | -15.46      | -48.03          | -47.77 | 8.17                   | -36.72           |
| 2   | 12698.43        | 48.37 AV                | 54             | -5.63       | -57.96          | -58.19 | 8.17                   | -46.89           |
| 3   | 19035.81        | 51.32 PK                | 74             | -22.68      | -55.49          | -54.78 | 8.17                   | -43.94           |
| 4   | 19041.56        | 41.21 AV                | 54             | -12.79      | -65.32          | -65.15 | 8.17                   | -54.05           |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.




### Chain 0

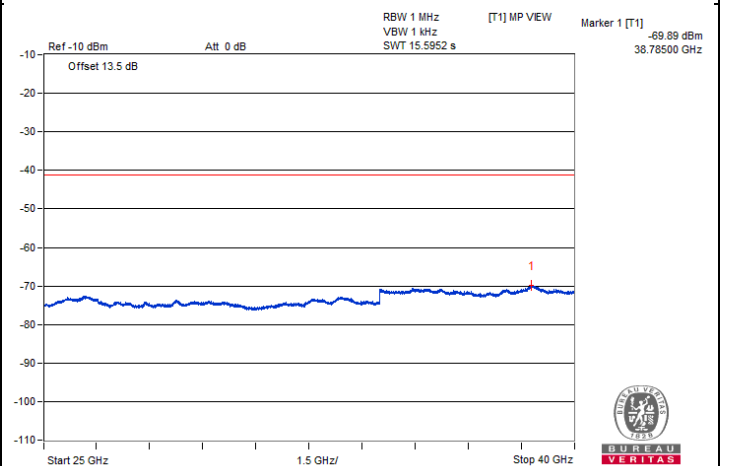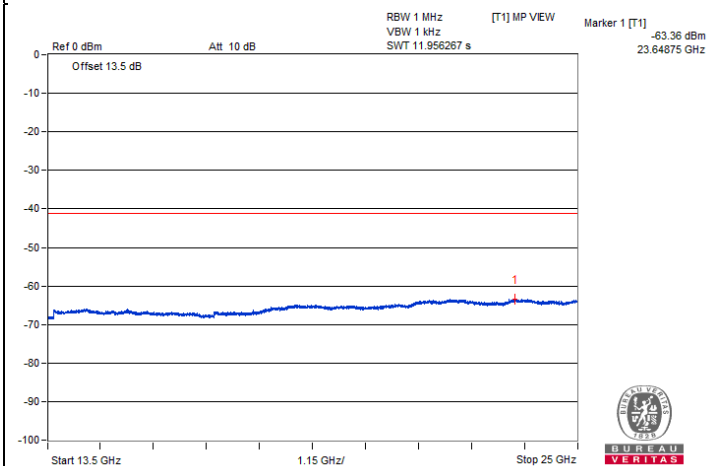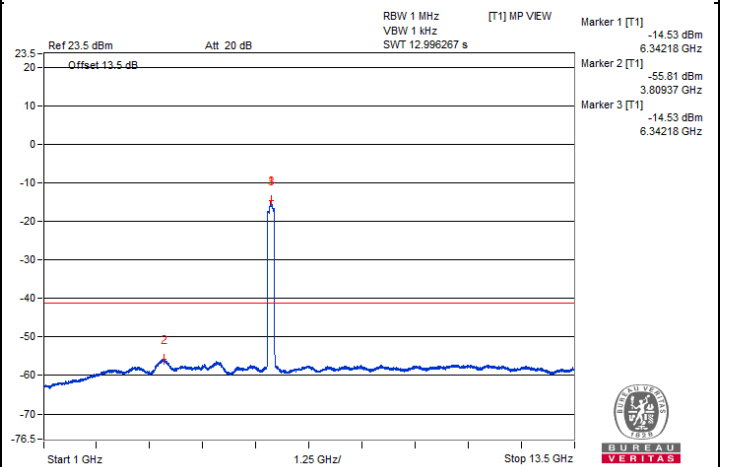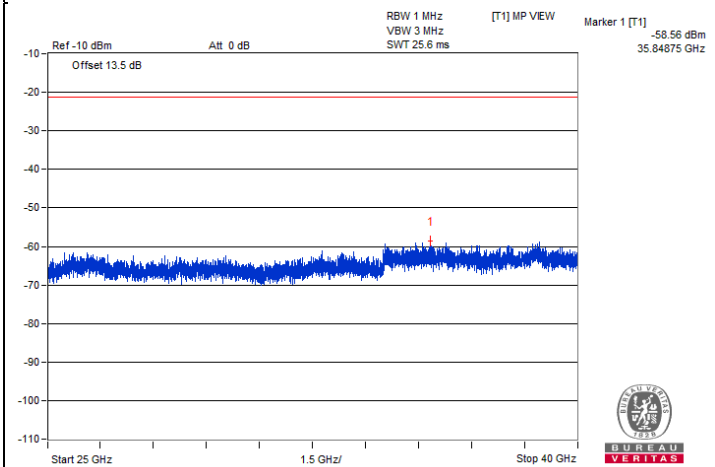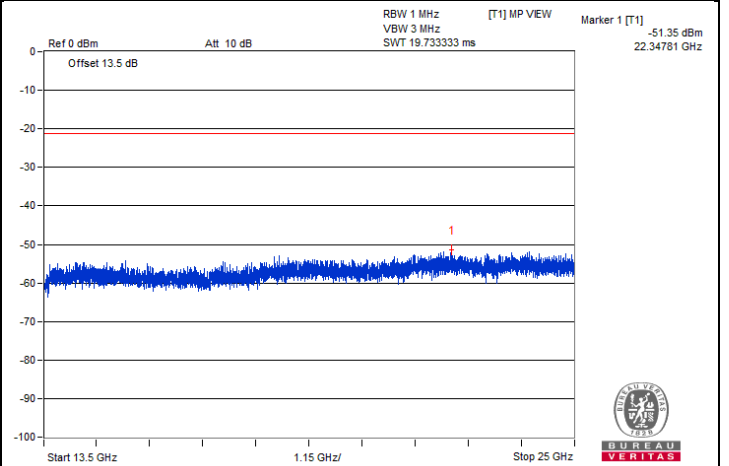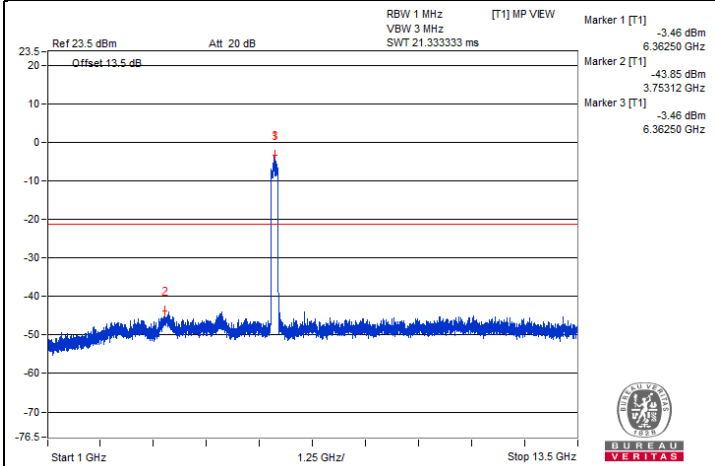



BUREAU  
VERITAS

### Chain 1

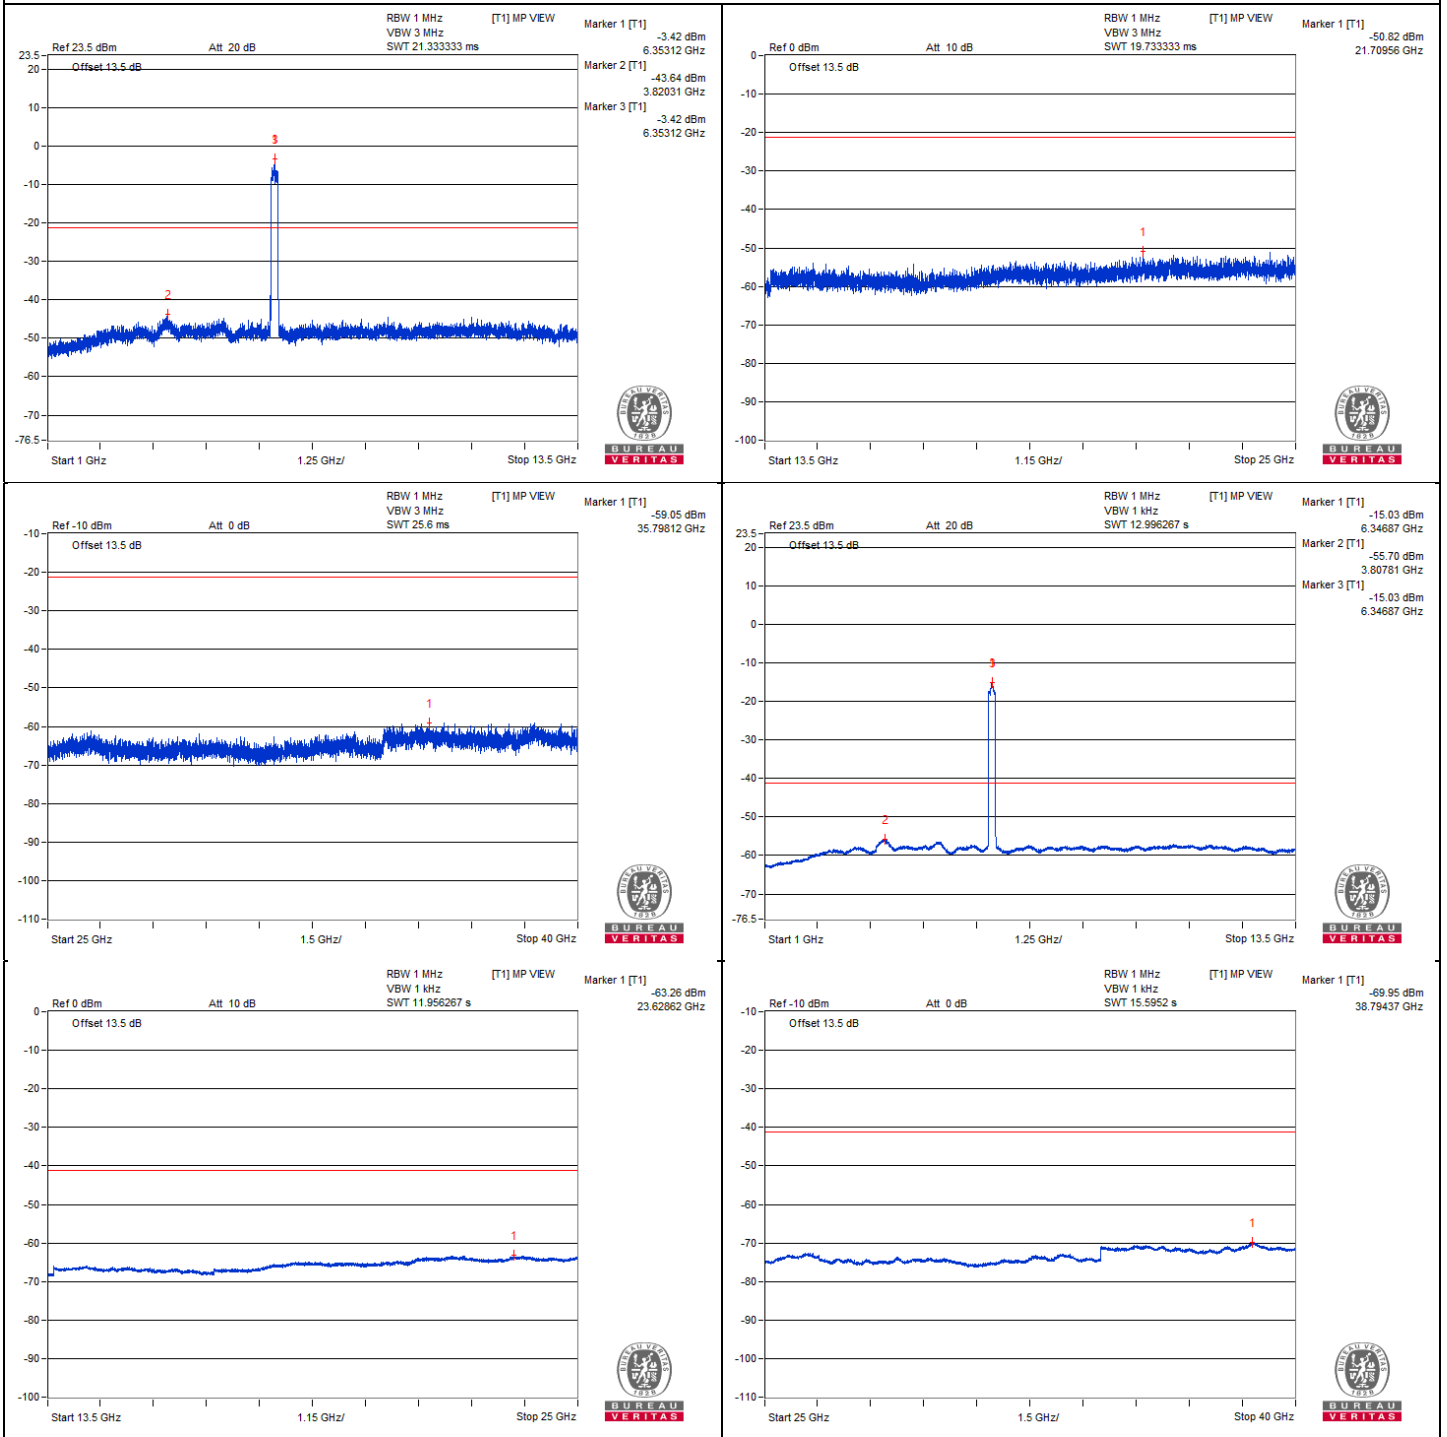

### 802.11be (EHT160) - Channel 111

#### Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | #13010.93       | 57.73 PK                | 88.2           | -30.47      | -49.39          | -48.13 | 8.17                   | -37.53           |
| 2   | #13004.68       | 47.4 AV                 | 68.2           | -20.8       | -59.17          | -58.91 | 8.17                   | -47.86           |
| 3   | 19520.25        | 50.67 PK                | 74             | -23.33      | -55.61          | -55.94 | 8.17                   | -44.59           |
| 4   | 19517.37        | 40.96 AV                | 54             | -13.04      | -65.65          | -65.32 | 8.17                   | -54.30           |


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.











### Chain 0

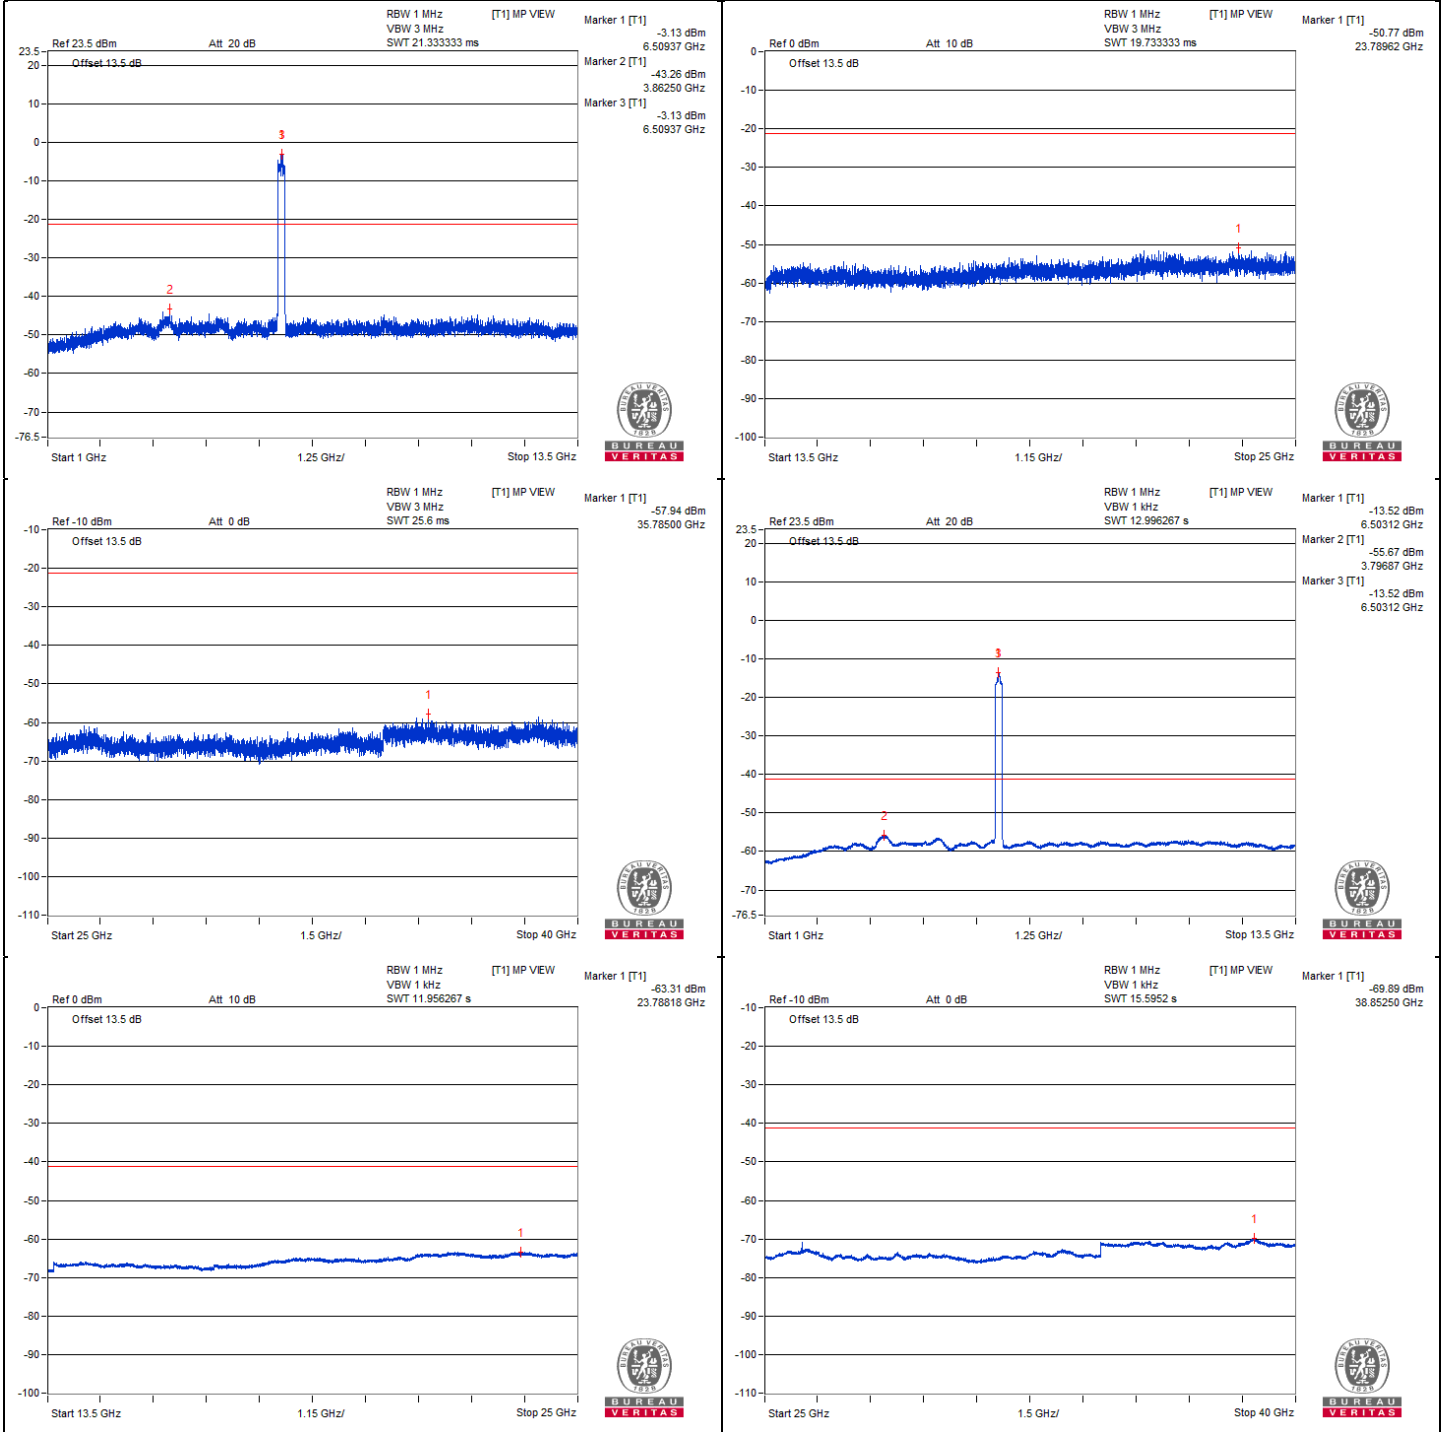



### Chain 1

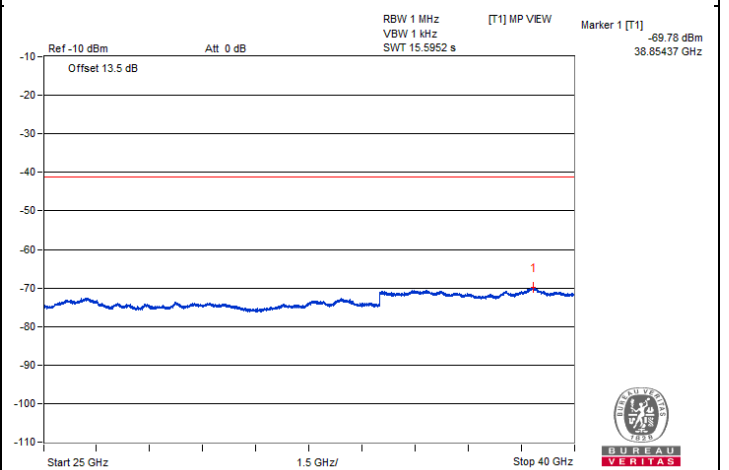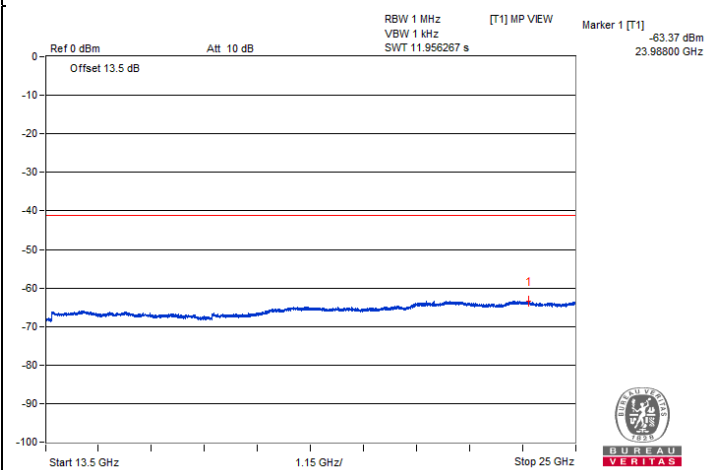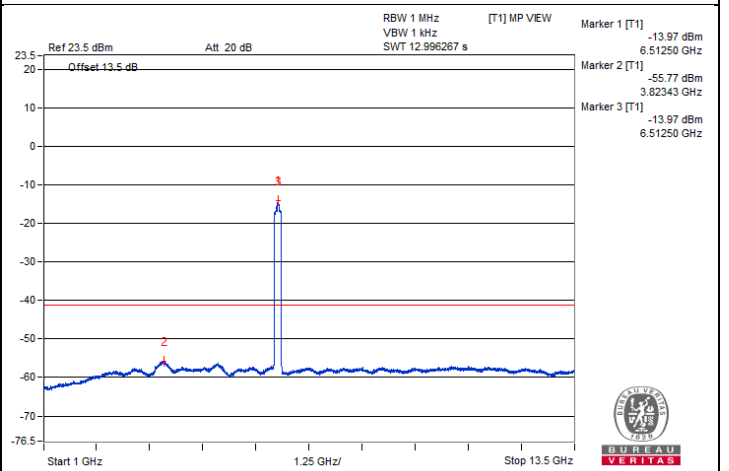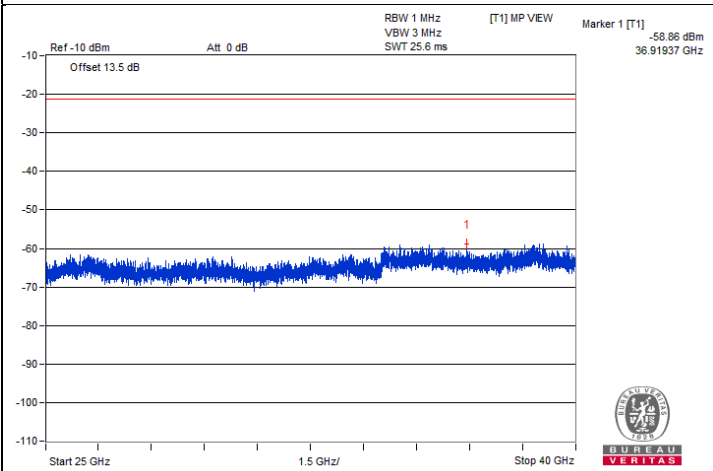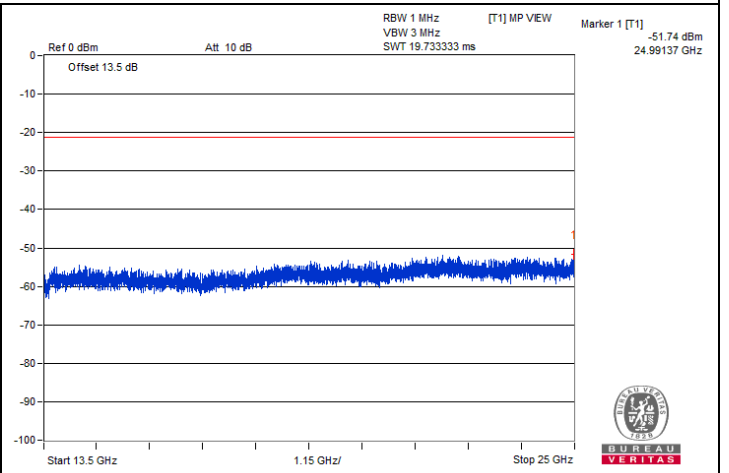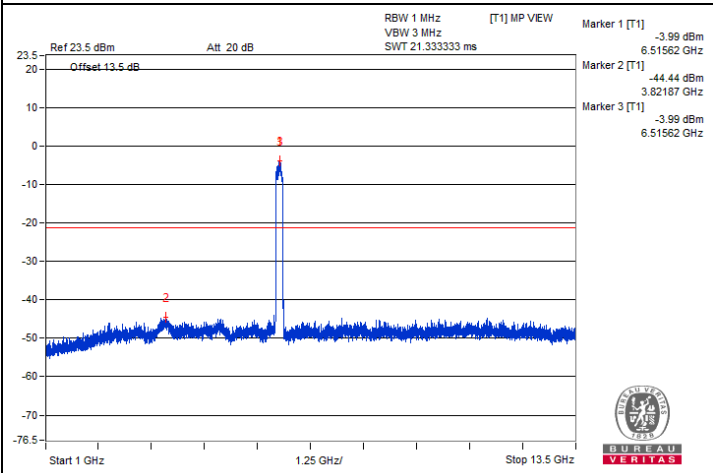

**802.11be (EHT160) - Channel 143**
**Conducted spurious emission table**

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 13320.31        | 59.04 PK                | 74             | -14.96      | -46.57          | -48.44 | 8.17                   | -36.22           |
| 2   | 13323.43        | 47.89 AV                | 54             | -6.11       | -58.77          | -58.35 | 8.17                   | -47.37           |
| 3   | 20001.81        | 51.83 PK                | 74             | -22.17      | -54.71          | -54.51 | 8.17                   | -43.43           |
| 4   | 19987.43        | 41.08 AV                | 54             | -12.92      | -65.56          | -65.17 | 8.17                   | -54.18           |

Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.