



Gobi2000™ Module Dell® Latitude XT2 (PP12S) Tablet Notebook 1-g SAR Test Report

80-VR673-10 Rev. C

December 8, 2009

**Submit technical questions to:
regulatory.support@qualcomm.com**

QUALCOMM is a registered trademark of QUALCOMM Incorporated in the United States and may be registered in other countries. Other product and brand names may be trademarks or registered trademarks of their respective owners. CDMA2000 is a registered certification mark of the Telecommunications Industry Association, used under license. ARM is a registered trademark of ARM Limited. QDSP is a registered trademark of QUALCOMM Incorporated in the United States and other countries.

This technical data may be subject to U.S. and international export, re-export, or transfer ("export") laws. Diversion contrary to U.S. and international law is strictly prohibited.

QUALCOMM Incorporated
5775 Morehouse Drive
San Diego, CA 92121-1714
U.S.A.

Copyright © 2009 QUALCOMM Incorporated.
All rights reserved.

December 8, 2009

Gobi2000™ Module Dell® Latitude XT2 (PP12S) Tablet Notebook 1-g SAR Test Report
80-VR673-10 Rev. C

Revision history

| Revision | Date | Description |
|----------|-------------------|---|
| A | November 20, 2009 | Initial release |
| B | December 1, 2009 | <ul style="list-style-type: none">• Correction of conductivity value and deviation in Table 3-1• Correction of probe serial number and cal dates in Table 6-4• Replaced probe cal certificate with correct serial number• Corrected Test Specification Standards section on page 4 |
| C | December 8, 2009 | <ul style="list-style-type: none">• Typo corrections |



5775 Morehouse Dr.
San Diego CA 92121

Overview

| | |
|--|---|
| Test Report Reference: | 80-VR673-10 Rev. C |
| Responsible Engineer: | John Forrester |
| Signature: | |
| Test Engineer: | Mark Ortlieb |
| Signature: | |
| Date of issue: | 8 December 2009 |
| Test Laboratory: | QUALCOMM Incorporated 5775 Morehouse Dr. San Diego CA 92121 (General Telephone) 1 858 587 1121 |
| Model Tested: | Gobi2000 module WWAN module with Dell® Latitude XT2 (PP12S) Tablet Notebook Computer |
| Test Specification Standard(s): | <p>FCC CFR47 Part 2.1093: <i>Radiofrequency radiation exposure evaluation: portable devices</i></p> <p>FCC/OET Bulletin 65, including Supplement C, <i>Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields</i></p> <p>FCC "SAR Measurement Procedures for 3G Devices" (October 2007)</p> <p>FCC "Mobile and Portable Device – RF Exposure Procedures and Equipment Authorization Policies" (KDB 447498)</p> <p>FCC "SAR Evaluation Considerations for Laptop Computers with Antennas Built-in on Display Screens" (KDB 616217)</p> <p>ANSI/IEEE P1528/D1.2 <i>Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques</i></p> |
| Results: | The Gobi2000 module embedded in Dell host tablet notebook PP12S complies with the requirements of the aforementioned standards and is in compliance with the FCC Part 2.1093 RF exposure limit. |

Contents

| | |
|---|-----------|
| 1. Test summary..... | 8 |
| 1.1 Equipment tested | 8 |
| 1.2 Maximum (Worst Case Results) | 8 |
| 1.3 Measurement Uncertainty | 8 |
| 1.4 SAR Limits | 8 |
| 2. EUT Description | 9 |
| 2.1 General | 9 |
| 3. Conducted Transmit Power Results | 11 |
| 4. SAR Test Matrix | 12 |
| 5. SAR Test Facility..... | 14 |
| 5.1 General | 14 |
| 5.2 Dosimetry System | 14 |
| 5.3 E-field probe..... | 15 |
| 5.4 Phantom | 15 |
| 5.5 Liquid Dielectric..... | 16 |
| 6. System Specifications and Calibration..... | 17 |
| 7. SAR Measurement Procedure | 19 |
| 7.1 EUT Configuration | 19 |
| 7.2 Power Verification..... | 19 |
| 7.3 Test Configurations | 19 |
| 7.3.1 EUT Position | 19 |
| 7.3.2 Tablet Position..... | 20 |
| 7.4 Scan procedure | 20 |
| 8. Measurement Uncertainty..... | 21 |
| 9. EUT Configuration Procedure | 22 |
| 9.1 EUT Test Frequencies | 22 |
| 9.2 Call Box Simulator Information | 22 |
| 9.3 RF Power Measurement Procedure | 23 |
| 9.3.1 Test Setup | 23 |
| 9.4 Base Station Emulator Settings and Test Procedures..... | 23 |
| 9.4.1 For CDMA2000 1x/EVDO | 23 |
| 9.4.2 For WCDMA/HSDPA/HSUPA | 25 |
| 9.4.3 For GSM/GPRS/EGDE | 26 |
| 10. Numerical SAR Data | 27 |
| 10.1 Numerical Data | 27 |
| 11. Photos of test setup | 28 |
| 11.1 Photos of DUT | 28 |
| 12. System Check | 33 |
| 12.1 General System Check Procedure | 33 |
| 12.2 System Check Data..... | 33 |
| 12.3 900 MHz System Check | 34 |
| 12.4 1900 MHz System Check | 35 |
| 13. SAR Plot Reports..... | 36 |
| 13.1 GPRS 850 (2 slots) | 37 |

| | |
|--|-----------|
| 13.1.1 Tablet position | 37 |
| 13.1.2 Secondary portrait position..... | 40 |
| 13.1.3 GPRS850 band Z-axis plot (worst case scan) | 43 |
| 13.2 EVDO r0 PCS..... | 44 |
| 13.2.1 Tablet position | 44 |
| 13.2.2 Secondary portrait position..... | 47 |
| 13.2.3 PCS 1900 band Z-axis plot (worst case scan) | 50 |
| 14. SAR System Calibration Data..... | 51 |

Figures

| | |
|--|----|
| Figure 3-1 DASY5 system: Robot Arm, Controller box, Device Positioning Holder | 15 |
| Figure 3-2 SAM Phantom..... | 16 |
| Figure 6-1 Diagram of DASY5 System, from S&P Applications Notes System Description and Setup | 17 |
| Figure 7-1 Lap-held position drawing | 19 |
| Table 7-2 Phantom to Notebook Surface Contact Designations..... | 20 |
| Table 7-3 Display Orientation Configurations | 20 |
| Figure 11-1 External View of Notebook (closed)..... | 28 |
| Figure 11-2 External View of Notebook (open) | 29 |
| Figure 11-3 External View of Notebook (tablet) | 30 |
| Figure 11-4 Bottom view of notebook showing WWAN module location | 30 |
| Figure 11-4 DUT positioned under Phantom – Tablet position | 31 |
| Figure 11-5 DUT positioned under Phantom – Secondary Portrait position | 32 |

Tables

| | |
|--|----|
| Table 1-1 Maximum SAR measured | 8 |
| Table 1-2 Measurement Uncertainty | 8 |
| Table 1-4 1 Gram SAR Limits | 8 |
| Table 2-1 WWAN Module Information | 9 |
| Table 2-2 Host Notebook Information | 10 |
| Table 3-1 GPRS Maximum Average Transmit Power (dBm) | 11 |
| Table 3-2 CDMA 1x/EV-DO Maximum Average Transmit Power (dBm) | 11 |
| Table 3-3 WCDMA/HSPA Maximum Average Transmit Power Results (dBm) | 11 |
| Table 4-1 SAR Testing Completed per FCC Laptop Procedures | 12 |
| Table 4-2 Maximum Transmit Power Summary (dBm) | 12 |
| Table 4-3 SAR Evaluation Requirements per FCC laptop procedure (Individual transmitter requirements) | 13 |
| Table 3-1 Tissue Dielectric Properties at Time of Testing | 16 |
| Table 6-1 Data Acquisition | 17 |
| Table 6-2 E-Field Probe | 17 |
| Table 6-3 Phantom..... | 18 |
| Table 6-4 Calibration | 18 |
| Table 7-4 Proposed SAR test positions | 20 |
| Table 8-1 Measurement Uncertainty | 21 |
| Table 10-1 Measured SAR Results..... | 27 |
| Table 12-1 SAR System Check Data Gobi2000 Test Program (Body TSL) | 33 |

1. Test summary

1.1 Equipment tested

A Gobi2000™ module WWAN mPCIe card embedded in a Dell® Latitude™ XT2 (regulatory model PP12S) tablet notebook computer was tested for SAR compliance with FCC regulations.

The XT2 computer also has embedded Bluetooth and WLAN capabilities that were not tested as part of this test report. While simultaneous transmission is enabled, it is not evaluated in this report; collocation is addressed in a separate report.

Because this is a tablet computer, it was tested in accordance with the FCC publication *Mobile and Portable Device – RF Exposure Procedures and Equipment Authorization Policies* (KDB 447498).

1.2 Maximum (Worst Case Results)

Table 1-1 give SAR results for channels tested.

Table 1-1 Maximum SAR measured

| Band | Mode | Position | Channel | 1-g SAR | Result |
|------|-----------|----------|---------|---------|--------|
| Cell | GPRS 2 UL | Tablet | 190 | 0.313 | Pass |
| PCS | EV-DO | Tablet | 600 | 0.600 | Pass |

1.3 Measurement Uncertainty

Table 1-2 Measurement Uncertainty

| | |
|-------------------------------------|-------|
| Combined Standard Uncertainty | 10.0% |
| Extended Standard Uncertainty (k=2) | 20.1% |

1.4 SAR Limits

Table 1-3 gives 1 gram SAR limits for general public for the frequency range of 10 MHz to 10 GHz as called out in FCC CFR 47 Part 2.1093.

Table 1-4 1 Gram SAR Limits

| | |
|--------------------------------|----------|
| Localized SAR (head and trunk) | 1.6 mW/g |
|--------------------------------|----------|

2. EUT Description

2.1 General

Table 2-1 WWAN Module Information

| | |
|---------------------------|--|
| WWAN Module Model | Gobi2000 |
| WWAN Module FCC ID | J9CGOBI2000-D |
| WWAN Module Serial Number | N/A |
| WWAN Module Description | Gobi2000 is a PCI Express Mini Card with WWAN connectivity for the WCDMA/HSPA, GSM/GPRS/EDGE and CDMA2000 1x/1x-EVDO protocols, plus GPS position location. |
| Host(s) Tested: | Dell Latitude XT2 (regulatory model number PP12S) |
| Host(s) Serial Number: | 3KW2LK1 |
| WWAN Technologies | GSM/GPRS/EDGE CDMA 1x Rel0 CDMA EV-DO RevA WCDMA/HSPA |
| Equipment Categories | GPRS Category 10 EDGE Category 10 HSDPA Category 8 (Release 6) HSUPA Category 5 (Release 6) |
| TX Frequencies | GSM/GPRS/EDGE: 824.2 – 848.8 MHz GSM/GPRS/EDGE: 1850.2 – 1909.8 MHz CDMA 1x/EV-DO: 824.7 – 848.31 MHz CDMA 1x/EV-DO: 1851.25 – 1908.75 MHz WCDMA/HSPA: 826.4 – 846.6 MHz WCDMA/HSPA: 1852.4 – 1907.5 MHz Bands not used in the United States: GSM/GPRS/EDGE: 880.2 – 914.8 MHz GSM/GPRS/EDGE: 1710.2 – 1784.8 MHz WCDMA/HSPA: 1922.6 – 1977.4 MHz |
| Duty Cycle(s) | CDMA/WCDMA: 100% GPRS 1 uplink slot: 12.5% GPRS 2 uplink slots: 25% |
| Power Supply | 3.3Vdc supplied by host notebook computer |

Table 2-2 Host Notebook Information

| | |
|--|---|
| Host Notebook Model | Dell Latitude XT2 (regulatory model number PP12S) |
| WLAN FCC ID(s) | N/A |
| Bluetooth FCC ID(s) | N/A |
| UWB FCC IC | N/A |
| WWAN Antenna(s) | Inverted-F, model Dell / AMG (12" LCD Panel) |
| BT Antenna(s) | N/A |
| WLAN Antenna(s) | N/A |
| WWAN to user separation distance (cm) | 2.1 cm (Secondary Portrait) 2.26 cm (Tablet mode) 22.9 cm (Notebook mode) |
| WLAN to user separation distance (cm) | N/A |
| Bluetooth to user separation distance (cm) | N/A |
| WWAN to WLAN antenna separation distance (cm) | N/A |
| WWAN to Bluetooth antenna separation distance (cm) | >5 cm |

3. Conducted Transmit Power Results

Conducted transmit power was tested in accordance with FCC 3G procedures, 3GPP and 3GPP2 standards. The test procedure for configuring the EUT to transmit at maximum output power is in section 9.

All transmit power results are based on an average detector. The rationale and calculations determining the SAR configurations tested per the FCC procedure are detailed in Section 4. *SAR Test Matrix*.

Table 3-1 GPRS Maximum Average Transmit Power (dBm)

| Mode | GSM850 Channel | | | GSM1900 Channel | | |
|----------|----------------|------|------|-----------------|------|------|
| | 128 | 190 | 251 | 512 | 661 | 810 |
| GPRS 2UL | 24.9 | 24.8 | 24.8 | 23.4 | 23.4 | 23.5 |

Table 3-2 CDMA 1x/EV-DO Maximum Average Transmit Power (dBm)

| REV | CDMA BCO (850MHz) | | | CDMA BC1 (1900MHz) | | |
|-----------------------------|-------------------|-------|-------|--------------------|-------|-------|
| | Low | Mid | High | Low | Mid | High |
| RC/TAP | | | | | | |
| RC3 (SO55) | 24.30 | 24.10 | 24.20 | 24.30 | 23.33 | 24.22 |
| RTAP rate = 153.6kbps | 24.41 | 23.96 | 24.25 | 24.67 | 24.70 | 24.71 |
| RETAP - payload size = 4096 | 23.12 | 23.24 | 23.17 | 23.51 | 23.68 | 23.64 |

Table 3-3 WCDMA/HSPA Maximum Average Transmit Power Results (dBm)

| Mode | 3GPP Subtest | Band V Channel | | | Band II Channel | | |
|------------|--------------|----------------|-------|-------|-----------------|-------|-------|
| | | Low | Mid | High | Low | Mid | High |
| Rel99 | R99 | 24.20 | 24.08 | 24.03 | 24.64 | 24.71 | 24.67 |
| Rel6 HSDPA | 1 | 23.93 | 23.86 | 23.68 | 23.81 | 23.92 | 23.74 |
| | 2 | 23.94 | 23.86 | 23.74 | 23.72 | 23.92 | 23.74 |
| | 3 | 23.71 | 23.83 | 23.70 | 23.60 | 23.85 | 23.69 |
| | 4 | 23.75 | 23.78 | 23.68 | 23.67 | 23.93 | 23.78 |
| | 5 | 23.33 | 24.00 | 23.10 | 24.26 | 24.29 | 23.13 |
| Rel6 HSUPA | 1 | 22.44 | 22.57 | 22.30 | 23.05 | 23.02 | 22.92 |
| | 2 | 22.46 | 22.38 | 22.23 | 22.88 | 23.26 | 23.22 |
| | 3 | 22.20 | 22.32 | 22.39 | 22.80 | 22.81 | 23.22 |
| | 4 | 23.87 | 22.88 | 23.84 | 24.31 | 24.31 | 23.24 |

4. SAR Test Matrix

Table 4-1 describes the SAR configurations tested for the EUT and host notebook described in this report per the FCC. The configurations tested are based on the calculations in Table 4-3 below that are based on evaluation requirements summarized in Table 2 of the FCC procedure *SAR Evaluation Considerations for Laptop Computers with Antennas Built-in on Display Screens* (KDB 616217 D01) released in November of 2009. The conducted powers used in the separation distance calculations are summarized in Table 4-2 below, which represents the highest transmit power test results from the conducted power data documented in this report. Per the FCC 3G Measurement procedures, modes have been omitted from Table 4-2 for the following reasons.

- Per FCC 3G 1x procedures, all modes have been eliminated that are less than 0.25dB greater than 1x RC3 (SO55)
- Per the FCC 3G procedures EV-DO Rev A has been omitted since the maximum transmit power results are less than the 1x RC3 and EV-DO Rel 0 test results.
- Per the FCC 3G procedures, HSDPA and HSUPA have been omitted since the maximum transmit power results are less than the R99 test results.

All SAR configurations are based on calculations for an individual transmitter or antenna. Simultaneous transmitter considerations have not been completed for these reasons:

- WWAN does not transmit simultaneously with WLAN
- Bluetooth Power is $<60/f_{(GHz)}$

Based on the high margin to the SAR limit, only the modes with the highest transmit power were tested. The conducted transmit power of other modes not tested for SAR were equal to or less than the modes tested for SAR and thus the tested SAR results are representative of the untested modes.

Table 4-1 SAR Testing Completed per FCC Laptop Procedures

| Mode | Band | Channels | Rationale |
|----------|----------|--------------|---|
| GPRS 2UL | 850 MHz | Low/mid/high | Test low/middle/high channels since the antenna-to-user separation distance provided by the host notebook computer is less than the calculated minimum antenna-to-user distance per Table 2 of FCC procedure. |
| EV-DO R0 | 1900 MHz | Low/mid/high | Test low/middle/high channels since the antenna-to-user separation distance provided by the host notebook computer is less than the calculated minimum antenna-to-user distance per Table 2 of FCC procedure. |

Table 4-2 Maximum Transmit Power Summary (dBm)

| Mode | Cell | | | PCS | | |
|----------------------|------|------|------|------|------|------|
| | Low | Mid | High | Low | Mid | High |
| EV-DO R0 RTAP-153.5K | 23.7 | 23.3 | 23.4 | 23.8 | 23.7 | 23.6 |
| GPRS-2UL | 24.9 | 24.8 | 24.8 | 23.4 | 23.4 | 23.5 |
| WCDMA Rel99 | 24.2 | 24.1 | 24.0 | 24.6 | 24.7 | 24.7 |

**Table 4-3 SAR Evaluation Requirements per FCC laptop procedure
 (Individual transmitter requirements)**

| | | Maximum Average Conducted Power | | | | | | | |
|------------|------------|---------------------------------|-------|----------------|------------------------------|--------------------------------|---------------------------------|---|--------------|
| Technology | Freq (MHz) | dBm | mW | 60/F(GHz) (mW) | 1/2*n (cm) per FCC Procedure | Minimum antenna-user dist (cm) | WWAN Antenna-User Distance (cm) | SAR Test Requirement per RF Conditions and Test Reduction Procedure | SAR Measured |
| 1x RC3 | 824 | 24.3 | 269.2 | 72.8 | 1 | 6 | 0 | Full SAR test | No |
| 1x RC3 | 836 | 24.1 | 257.0 | 71.8 | 1 | 6 | 0 | Full SAR test | No |
| 1x RC3 | 849 | 24.2 | 263.0 | 70.8 | 1 | 6 | 0 | Full SAR test | No |
| EV_DO R0 | 824 | 23.7 | 232.3 | 72.8 | 1 | 6 | 0 | Full SAR test | No |
| EV_DO R0 | 836 | 23.3 | 214.8 | 71.8 | 1 | 6 | 0 | Full SAR test | No |
| EV_DO R0 | 849 | 23.4 | 220.3 | 70.8 | 1 | 6 | 0 | Full SAR test | No |
| R99 | 826 | 24.2 | 263.0 | 72.8 | 1 | 6 | 0 | Full SAR test | No |
| R99 | 836 | 24.1 | 255.9 | 71.8 | 1 | 6 | 0 | Full SAR test | No |
| R99 | 846 | 24.0 | 252.9 | 70.8 | 1 | 6 | 0 | Full SAR test | No |
| GPRS 10 | 824 | 24.9 | 309.0 | 72.8 | 2 | 7 | 0 | Full SAR test | Yes |
| GPRS 10 | 836 | 24.8 | 302.0 | 71.8 | 2 | 7 | 0 | Full SAR test | Yes |
| GPRS 10 | 849 | 24.8 | 302.0 | 70.8 | 2 | 7 | 0 | Full SAR test | Yes |
| 1x RC3 | 1851 | 24.3 | 269.2 | 32.4 | 4 | 9 | 0 | Full SAR test | No |
| 1x RC3 | 1880 | 23.3 | 215.3 | 31.9 | 3 | 8 | 0 | Full SAR test | No |
| 1x RC3 | 1908 | 24.2 | 264.2 | 31.4 | 4 | 9 | 0 | Full SAR test | No |
| EV_DO R0 | 1851 | 23.8 | 238.2 | 32.4 | 3 | 8 | 0 | Full SAR test | Yes |
| EV_DO R0 | 1880 | 23.7 | 233.3 | 31.9 | 3 | 8 | 0 | Full SAR test | Yes |
| EV_DO R0 | 1908 | 23.6 | 229.6 | 31.4 | 3 | 8 | 0 | Full SAR test | Yes |
| R99 | 1852 | 24.6 | 291.1 | 32.4 | 4 | 9 | 0 | Full SAR test | Yes |
| R99 | 1880 | 24.7 | 295.8 | 31.9 | 4 | 9 | 0 | Full SAR test | Yes |
| R99 | 1908 | 24.7 | 293.1 | 31.4 | 4 | 9 | 0 | Full SAR test | Yes |
| GPRS 10 | 1850 | 23.4 | 218.8 | 32.4 | 3 | 8 | 0 | Full SAR test | No |
| GPRS 10 | 1880 | 23.4 | 218.8 | 31.9 | 3 | 8 | 0 | Full SAR test | No |
| GPRS 10 | 1910 | 23.5 | 223.9 | 31.4 | 3 | 8 | 0 | Full SAR test | No |

5. SAR Test Facility

5.1 General

| | |
|-------------------|---|
| Test Location | QUALCOMM Incorporated 5775 Morehouse Dr. San Diego CA 92121 |
| Temperature Range | 15-35 °C (23°C actual) |
| Humidity Range | 25-75% (38% actual) |
| Pressure | 860-1060 mbar (1015 mB) |

All Qualcomm dosimetry equipment is operated within a shielded screen room manufactured by Lindgren RF Enclosures to provide isolation from external EM fields. The E-field probes of the DASY5 system are capable of detecting signals as low as 5µW/g in the liquid dielectric, and so external fields are minimized by the screen room, leaving the phone as the dominate radiation source. The floor of the screen room is reflective, so the phantom bench is placed on two ferrite panels measuring 2 ft² each, in order to minimize reflected energy that would otherwise re-enter the phantom and combine constructively or destructively with the desired results.

5.2 Dosimetry System

The dosimetry equipment consists of a complete state-of-the-art DASY5 dosimetry system manufactured and calibrated by Schmid & Partner Engineering AG of Zurich, Switzerland. The DASY5 system consists of a six axis robot, a robot controller, a teach pendant, automation software on a 3.16 GHz Intel Core2® Duo CPU E8500 computer, data acquisition system, isotropic E-field probe, device positioning holder, and validation kit. The positioner was designed specifically for positioning laptops, and is made of low-loss materials: POM, acrylic glass and foam.

Figure 3-1 shows the robot arm, controller box and device-positioning holder.

Figure 3-1 DASY5 system: Robot Arm, Controller box, Device Positioning Holder



5.3 E-field probe

Manufactured by Schmid & Partner, Model ET3DV6. Calibrated by the manufacturer in head tissue simulating liquid at frequencies ranging from 835 MHz to 1.95 GHz. Dynamic range is said by the manufacturer to be 5 μ W/gm to approx. 100 mW/g. The probe contains 3 small dipoles positioned symmetrically on a triangular core to provide for isotropic detection of the field. Each dipole contains a diode at the feed point that converts the RF signal to DC, which is conducted down a high impedance line to the data acquisition system.

5.4 Phantom

The phantom is the Standard Anthropomorphic Model (“SAM”) phantom supplied by Schmid & Partner AG, and is designed for compliance to the guidelines provided in standard IEEE P1528. It consists of a left and right side head for simulating phone usage on both sides of the head, as well as a flat area for simulating phone usage against the body. The phantom is constructed of fiberglass with 2 mm \pm 0.1mm shell thickness. The DASY5 system uses a homogeneous tissue phantom based on studies concerning energy absorption of the human head, and the different absorption rates between adults and children. These studies indicated that a homogeneous phantom should overestimate SAR by no more than 15% for 10 g averages and should not underestimate SAR.

Figure 3-2 shows the SAM phantom.

Figure 3-2 SAM Phantom



5.5 Liquid Dielectric

The tissue-simulating liquid filling the phantom is mixed by Qualcomm staff per manufacturer instructions and regulatory standards. There are separate formulas for the various applicable frequencies. Before the test, the permittivity and conductivity were measured with an automated Hewlett-Packard 85070B dielectric probe in conjunction with an H-P 8752C network analyzer to monitor permittivity change due to evaporation and settling of ingredients. The electromagnetic parameters of the liquid were maintained as shown in Tables 3-1. The target values were obtained from FCC OET Publication 65, Supplement C.

Table 3-1 Tissue Dielectric Properties at Time of Testing

| Test Date | Frequency (MHz) | Permittivity (ϵ_r) | | | | Conductivity (σ) | | | |
|------------|-----------------|-------------------------------|---------------|---------------|-----------|---------------------------|---------------|---------------|-----------|
| | | Measured Values | Target Values | Deviation (%) | Limit | Measured Values | Target Values | Deviation (%) | Limit |
| 10/23/2009 | 824.2 | 55.2 | 55.2 | 0.00% | $\pm 5\%$ | 0.926 | 0.97 | -4.53% | $\pm 5\%$ |
| | 836.6 | 55 | 55.2 | -0.36% | $\pm 5\%$ | 0.938 | 0.97 | -3.30% | $\pm 5\%$ |
| | 848.8 | 55 | 55.2 | -0.36% | $\pm 5\%$ | 0.95 | 0.97 | -2.06% | $\pm 5\%$ |
| 10/22/2009 | 1851.25 | 52.6 | 53.3 | -1.31% | $\pm 5\%$ | 1.46 | 1.52 | -3.95% | $\pm 5\%$ |
| | 1881.0 | 52.5 | 53.3 | -1.50% | $\pm 5\%$ | 1.49 | 1.52 | -1.97% | $\pm 5\%$ |
| | 1908.75 | 52.3 | 53.3 | -1.88% | $\pm 5\%$ | 1.52 | 1.52 | 0.00% | $\pm 5\%$ |

25 L of the tissue simulating liquid was prepared using the following proportions of ingredients (percentage by weight):

900 Mhz Muscle Tissue Simulating Liquid

Water – 63.17%
Sugar – 60.00%
Preventol – 0.12%
Salt – 1.17%

1900 MHz Muscle Tissue Simulating Liquid

Water – 71.66%
Glycol Monobutyl Ether – 30.07%
Salt – 0.40%

6. System Specifications and Calibration

Figure 6-1 shows a diagram of the Schmid & Partner DASY5 system.

**Figure 6-1 Diagram of DASY5 System,
 from S&P Applications Notes System Description and Setup**

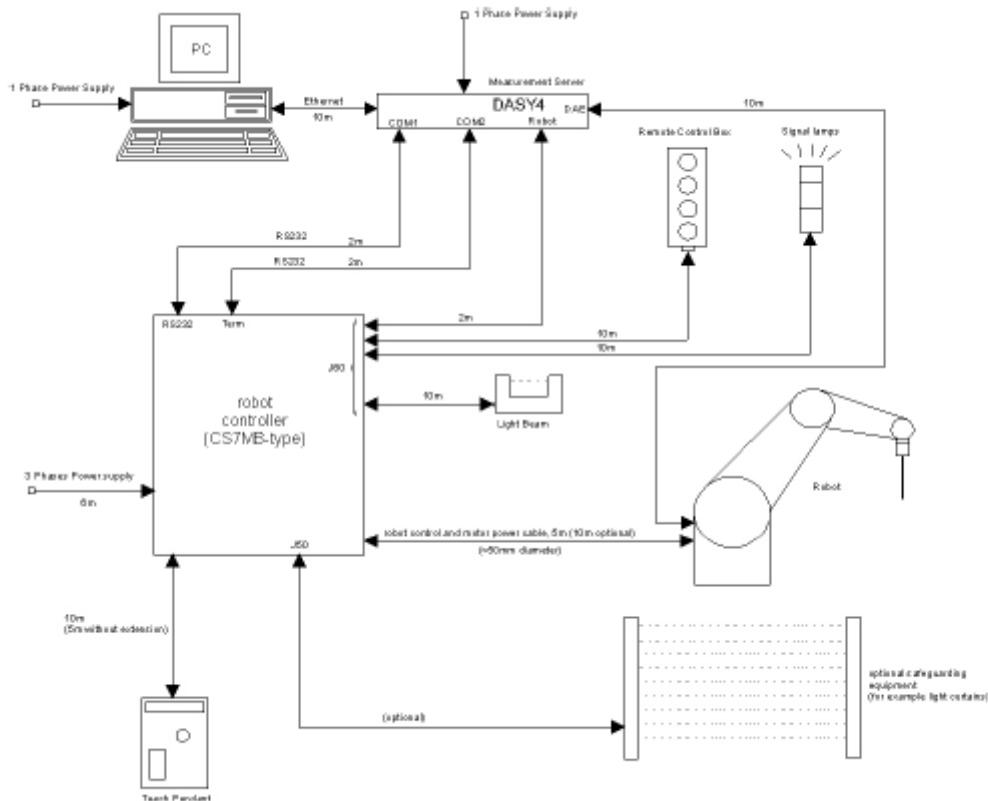


Table 6-1 Data Acquisition

| | |
|-------------------|--|
| Processor | Intel Core®2 Duo CPU E8500 GHz |
| Operating System | Microsoft® Windows® XP |
| Software | DASY5 V5.0 Build 120.0, Schmid & Partner Eng. AG, Switzerland SEMCAD X V13.4 Build 45.0 |
| Surface Detection | Mechanical |

Table 6-2 E-Field Probe

| | |
|-----------------------------|----------------------------|
| Offset tip to sensor center | 2.7 mm |
| Offset surface to probe tip | 1.8 ± 0.2 |
| Frequency | 30 MHz to 3.0 GHz |
| Dynamic Range | 5µW/g to 100 mW/g |
| Isotropy | ±0.15 dB (in brain liquid) |

Table 6-3 Phantom

| | |
|------------|---|
| Dielectric | 800 MHz band: homogeneous water/sugar/salt/ cellulose liquid 1900 MHz band: Homogeneous water/glycol/salt liquid |
| Shell | 2 mm ± 0.2 mm polyester fiber glass |
| Ear | Integral model per SAM phantom specification |

Table 6-4 Calibration

| Equipment Mfr & Type | Serial number | Last Calibrated | Next Calibration |
|---|----------------------|------------------------|-------------------------|
| Schmid & Partner Engineering AG Dosimetric E-field Probe, ET3DV5 | 1733 | 17 September 2009 | 17 September 2010 |
| Schmid & Partner Engineering AG dipole validation kit, D835V2 | 466 | 19 October 2009 | 19 October 2010 |
| Schmid & Partner Engineering AG dipole validation kit, D1900V2 | 5d096 | 20 October 2009 | 20 October 2010 |
| Schmid & Partner Engineering AG Data Acquisition Electronics, DAE3 V1 | 566 | 20 April 2009 | 20 April 2010 |
| Gigatronics 8541C RF Power Meter | X18383 | 7 May 2009 | 7 May 2010 |
| Gigatronics 80401A Power Sensor | X21267 | 7 May 2009 | 7 May 2010 |
| Hewlett-Packard 8720ES Vector Network Analyzer | K100454 | 12 February 2009 | 12 February 2010 |
| Hewlett-Packard 85070M Dielectric Probe System | N/A | N/A | N/A |

7. SAR Measurement Procedure

7.1 EUT Configuration

The EUT was configured into the desired transmit configuration per the procedures defined in section 9.

7.2 Power Verification


Prior to beginning SAR testing, conducted power was measured on the Gobi2000 module embedded in the host computer to verify functionally and the WWAN maximum transmit power values using the procedures defined in section 9. The results of the conducted power measurements are found in section 3.

7.3 Test Configurations

7.3.1 EUT Position

The host computer was NOT tested in the lap-held position as shown in Figure 7-1 since the WWAN antenna is > 20 cm from the user in this position.

Figure 7-1 Lap-held position drawing

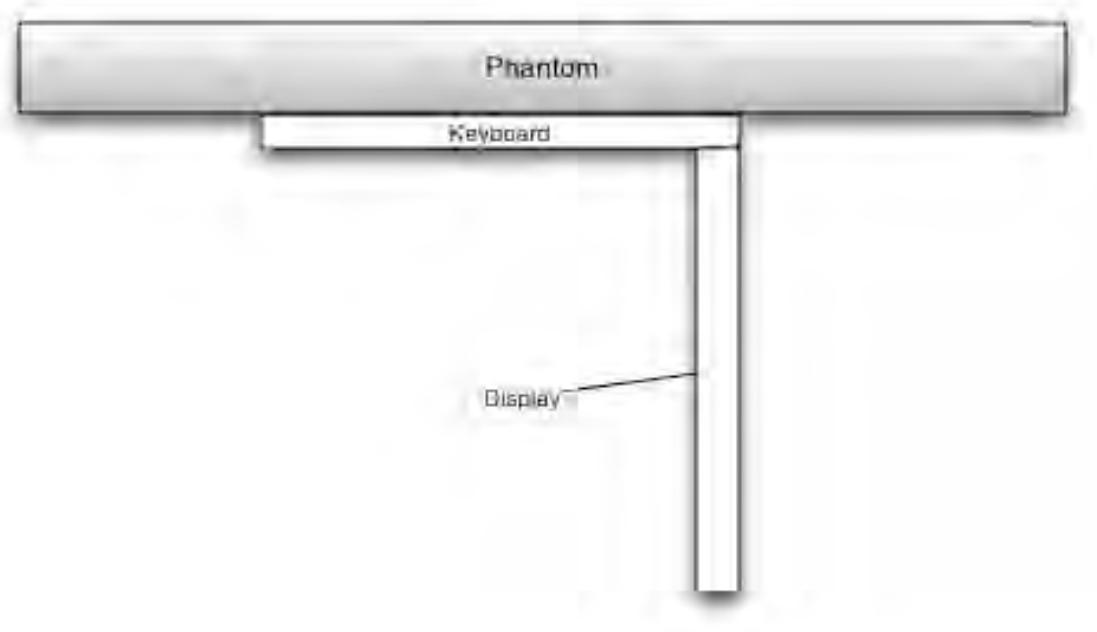

7.3.2 Tablet Position

Table 7-2 Phantom to Notebook Surface Contact Designations

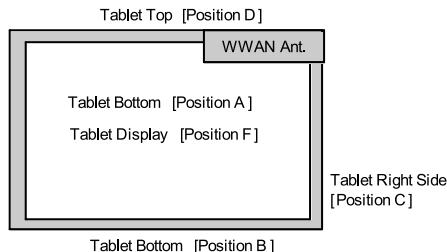


Table 7-3 Display Orientation Configurations

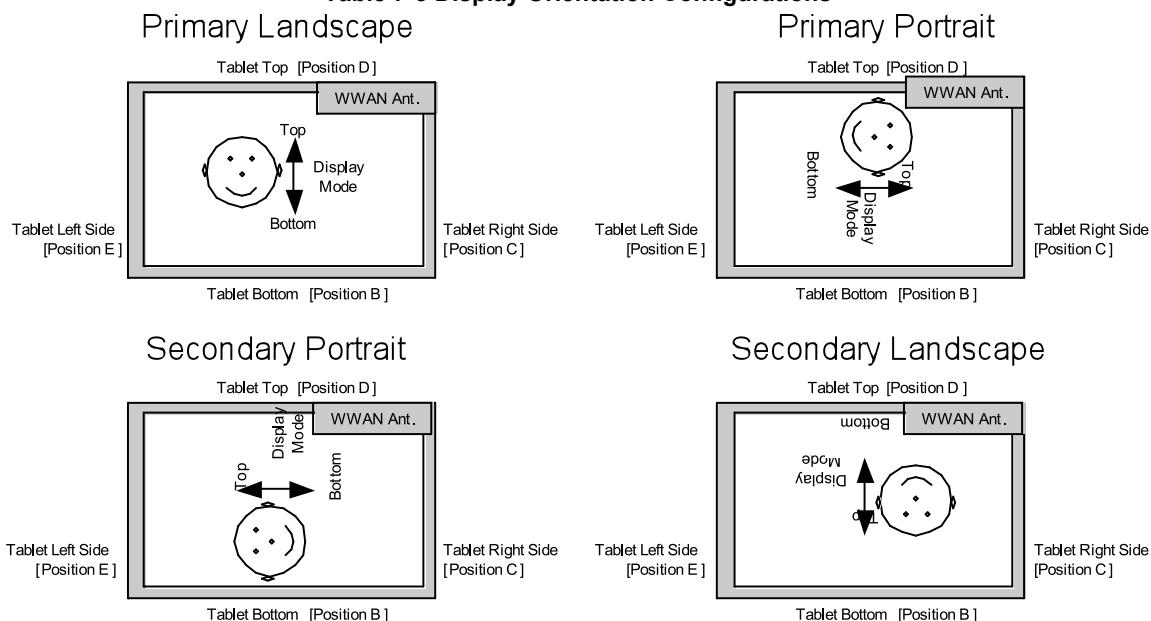


Table 7-4 Proposed SAR test positions

| SAR Test Position (Surface Flush to Phantom) | Tablet Usage Mode | WWAN Antenna Angle | Description |
|--|---------------------|--------------------|-----------------------|
| A | Tablet | Fixed | Tested |
| B | Primary Landscape | Fixed | Mobile – Not tested. |
| C | Secondary Portrait | Fixed | Tested |
| D | Secondary Landscape | Fixed | Disabled via Software |
| E | Primary Portrait | Fixed | Mobile – Not tested. |
| F | Display Flush | Fixed | Not applicable |

7.4 Scan procedure

The scan routine is set up as follows:

- Power verification measurement
- Area scan
- 7x7x7 cube (zoom) scan
- Robot movement to maximum location
- Z-axis scan
- Power verification re-test (Drift)

8. Measurement Uncertainty

The possible errors included in this measurement arise from device positioning uncertainty, device manufacturing uncertainty, liquid dielectric permittivity uncertainty, liquid dielectric conductivity uncertainty, and uncertainty due to disturbance of the fields by the probe.

Table 8-1 Measurement Uncertainty

| | Uncertainty value ($\pm \%$) | Prob. DIST | Div. | (ci) 1g | (ci) 10g | Std. Unc. (1g) ($\pm \%$) | Std. Unc. (10g) | (vi) veff |
|---------------------------------|--------------------------------|------------|------------|---------|----------|-----------------------------|-----------------|-----------|
| Measurement System | | | | | | | | |
| Probe Calibration | 4.8 | N | 1 | 1 | 1 | 4.8 | 4.8 | ∞ |
| Axial Isotropy | 4.7 | R | $\sqrt{3}$ | 0.7 | 0.7 | 1.9 | 1.9 | ∞ |
| Hemispherical Isotropy | 9.6 | R | $\sqrt{3}$ | 0.7 | 0.7 | 3.9 | 3.9 | ∞ |
| Boundary Effects | 1 | R | $\sqrt{3}$ | 1 | 1 | 0.6 | 0.6 | ∞ |
| Linearity | 4.7 | R | $\sqrt{3}$ | 1 | 1 | 2.7 | 2.7 | ∞ |
| System Detection Limits | 1 | R | $\sqrt{3}$ | 1 | 1 | 0.6 | 0.6 | ∞ |
| Readout Electronics | 1 | N | 1 | 1 | 1 | 1.0 | 1.0 | ∞ |
| Response Time | 0.8 | R | $\sqrt{3}$ | 1 | 1 | 0.5 | 0.5 | ∞ |
| Integration Time | 2.6 | R | $\sqrt{3}$ | 1 | 1 | 1.5 | 1.5 | ∞ |
| RF Ambient Conditions | 3 | R | $\sqrt{3}$ | 1 | 1 | 1.7 | 1.7 | ∞ |
| Probe Positioner | 0.4 | R | $\sqrt{3}$ | 1 | 1 | 0.2 | 0.2 | ∞ |
| Probe Positioning | 2.9 | R | $\sqrt{3}$ | 1 | 1 | 1.7 | 1.7 | ∞ |
| Max. SAR Eval. | 1 | R | $\sqrt{3}$ | 1 | 1 | 0.6 | 0.6 | ∞ |
| Test Sample Related | | | | | | | | |
| Device Positioning | 2.9 | N | 1 | 1 | 1 | 2.9 | 2.9 | 145 |
| Device Holder | 3.6 | N | 1 | 1 | 1 | 3.6 | 3.6 | 5 |
| Power Drift | 5 | R | $\sqrt{3}$ | 1 | 1 | 2.9 | 2.9 | ∞ |
| Phantom and Setup | | | | | | | | |
| Phantom Uncertainty | 4 | R | $\sqrt{3}$ | 1 | 1 | 2.3 | 2.3 | ∞ |
| Liquid Conductivity (target) | 5 | R | $\sqrt{3}$ | 0.64 | 0.43 | 1.8 | 1.2 | ∞ |
| Liquid Conductivity (meas.) | 2.5 | N | 1 | 0.64 | 0.43 | 1.6 | 1.1 | ∞ |
| Liquid Permittivity (target) | 5 | R | $\sqrt{3}$ | 0.6 | 0.49 | 1.7 | 1.4 | ∞ |
| Liquid Permittivity (meas.) | 2.5 | N | 1 | 0.6 | 0.49 | 1.5 | 1.2 | ∞ |
| Combined Std. Uncertainty | | | | | | 10.3 % | 10.0 % | 330 |
| Expanded STD Uncertainty | | | | | | 20.6 % | 20.1 % | |

9. EUT Configuration Procedure

9.1 EUT Test Frequencies

Table 9-1 Test Frequencies

| | | 850 MHz | | | | 1900 MHz | | | | | | |
|-------|----------------------|---------|----------------------|--------|----------------------|----------|----------------------|---------|----------------------|------|----------------------|---------|
| Low | | Mid | | High | | Low | | Mid | | High | | |
| Ch | Freq | Ch | Freq | Ch | Freq | Ch | Freq | Ch | Freq | Ch | Freq | |
| GSM | 128 | 824.2 | 190 | 836.6 | 251 | 848.8 | 512 | 1850.2 | 661 | 1880 | 810 | 1909.8 |
| CDMA | 1013 | 824.7 | 384 | 836.52 | 777 | 848.31 | 25 | 1851.25 | 600 | 1880 | 1175 | 1908.75 |
| WCDMA | UL: 4132 DL: 4357 | 826.4 | UL: 4182 DL: 4407 | 836.4 | UL: 4233 DL: 4458 | 846.6 | UL: 9262 DL: 9847 | 1852.4 | UL: 9400 DL: 9800 | 1880 | UL: 9538 DL: 9763 | 1907.6 |

9.2 Call Box Simulator Information

Table 9-2 Communications Test Box Information

| | | |
|---------------|-------------------|------------|
| Make | Agilent | |
| Model | 8960 | |
| Cal Date | 8 April 2009 | |
| Serial Number | GB44052409 | |
| SW Revision | GSM TA | E1968A-101 |
| | GPRS TA | E1968A-102 |
| | EGPRS TA | E1968A-103 |
| | WCDMA | E1963A |
| | HSDPA TEST MODES | E1963A-403 |
| | HSUPA TEST MODES | E1963A-413 |
| | cdma 2000 TA | E1962B |
| | 1xEV-DO TA | E1966A |
| | 1xEV-DO FTM TA | E1976A |
| | 1xEV-DO Release A | E1966A-102 |
| | 1xEV-DO RelA FTM | E1976A-102 |


9.3 RF Power Measurement Procedure

9.3.1 Test Setup

Connect the transmitter output to communications test set as shown in Figure 9-1 and configure the EUT to operate at maximum power in a call per procedures defined in sections 9.4 . Measure the conducted transmit power at the frequencies defined in 9.1 .

Power measurements are completed using a power meter configured to measure average power. The cable loss must be measured for the specific frequencies under test and added as a correction factor for all the tests.

Figure 9-1 RF Output Power Test Setup

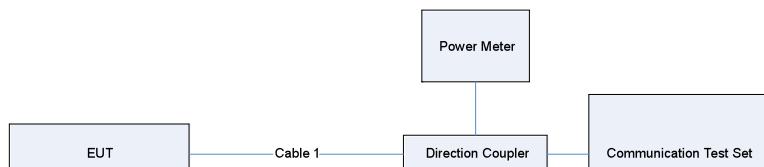

9.4 Base Station Emulator Settings and Test Procedures

9.4.1 For CDMA2000 1x/EVDO

Use CDMA2000 Rev 6 protocol in the call box.

- 1) Test for Reverse/Forward TCH RC1, Reverse/Forward TCH RC2, and RC3 Reverse FCH and demodulation of RC 3, 4 or 5.
 - a. Set up a call using Fundamental Channel Test Mode 1 (RC1, SO 2) with 9600 bps data rate only.
 - b. As per C.S0011 or TIA/EIA-98-F Table 4.4.5.2-1, set the test parameters as shown in Table 9-3.
 - c. Send continuously ‘0’ power control bits to the Gobi2000 module.
 - d. Measure the output power at Gobi2000 module’s antenna connector as recorded on the power meter with values corrected for cables losses.
 - e. Repeat step b through d for Fundamental Channel Test Mode:
 - i. RC1, SO55
 - ii. RC2, SO9
 - iii. RC2, SO55
 - iv. RC3, SO55
- 2) Test for RC 3 Reverse FCH, RC3 Reverse SCH0 and demodulation of RC 3, 4 or 5.
 - a. Set up a call using Supplemental Channel Test Mode 3 (RC 3, SO 32) with 9600 bps Fundamental Channel and 9600 bps SCH0 data rate.
 - b. As per C.S0011 or TIA/EIA-98-F Table 4.4.5.2-2, set the test parameters as shown in Table 9-4.
 - c. Send alternating ‘0’ and ‘1’ power control bits to the Gobi2000 module.
 - d. Determine the active channel configuration. If the desired channel configuration is not the active channel configuration, increase \hat{I}_{or} by 1 dB and repeat the verification. Repeat this step until the desired channel configuration becomes active.
 - e. Measure the output power at the Gobi2000 module antenna connector.
 - f. Decrease \hat{I}_{or} by 0.5 dB.
 - g. Determine the active channel configuration. If the active channel configuration is the desired channel configuration, measure the output power at the Gobi2000 module’s antenna connector.

- h. Repeat step f and g until the output power no longer increases or the desired channel configuration is no longer active. Record the highest output power achieved with the desired channel configuration active.
 - i. Repeat step a through h ten times and average the result.
- 3) Test for RC3 Reverse FCH, RC 3 DCCH and demodulation of RC3, 4 or 5.
- a. Use the same procedure as described in 2).

Table 9-3 Parameters for Max. Power with a single traffic code channel, SR1

| Parameter | Units | Value |
|--|--------------|-------|
| \hat{I}_{or} | dBm/1.23 MHz | -104 |
| $\frac{\text{Pilot } E_c}{\hat{I}_{or}}$ | dB | -7 |
| $\frac{\text{Traffic } E_c}{\hat{I}_{or}}$ | dB | -7.4 |

Table 9-4 Parameters for Max. Power with multiple traffic code channel, SR1

| Parameter | Units | Value |
|--|-------|-------|
| $\frac{\text{Pilot } E_c}{\hat{I}_{or}}$ | dB | -7 |
| $\frac{\text{Traffic } E_c}{\hat{I}_{or}}$ | dB | -7.4 |

1xEV-DO

- 1) Use 1xEV-DO Rel 0 protocol in the call box.
 - a. RTAP
 - Select Test Application Protocol to RTAP
 - Set RTAP Rate to 9.6 kbps
 - Generator Info -> Termination Parameters -> Max Forward Packet Duration -> 16 Slots
 - Set \hat{I}_{or} to -60 dBm/1.23 MHz
 - Send continuously '0' power control bits
 - Measure the power at Gobi2000 antenna connector
 - Repeat above steps for RTAP Rate = 19.2 kbps, 38.4 kbps, 76.8 kbps and 153.6 kbps respectively
- 2) Use 1xEV-DO Rev A protocol in the call box.
 - a. RETAP
 - Select Test Application Protocol to RETAP
 - F-Traffic Format -> 4 (1024, 2, 128) Canonical (307.2k, QPSK)
 - Set R-Data Pkt Size to 128
 - Protocol Subtype Config -> Release A Physical Layer Subtype -> Subtype 2 -> PL Subtype 2 Access Channel MAC Subtype -> Default (Subtype 0)
 - Generator Info -> Termination Parameters -> Max Forward Packet Duration -> 16 Slots
 - >ACK R-Data After -> Subpacket 0 (All ACK)
 - Set \hat{I}_{or} to -60 dBm/1.23 MHz

- Send continuously ‘0’ power control bits
- Measure the power at GOBI2000 module antenna connector
- Repeat above steps for R-Data Pkt Size = 256, 512, 768, 1024, 1536, 2048, 3072, 4096, 6144, 8192, 12288 respectively.
- Repeat above steps for R-Data Pkt Size = 256, 512, 768, 1024, 1536, 2048, 3072, 4096, 6144, 8192, 12288 respectively.

9.4.2 For WCDMA/HSDPA/HSUPA

Configure the call box to support all WCDMA tests in respect to the 3GPP 34.121 (listed in Table 9-5).
Rel99

- 1) Set a Test Mode 1 loop back with a 12.2kbps Reference Measurement Channel (RMC)
- 2) Set and send continuously Up power control commands to the Gobi 2000 module.

HSDPA Rel 6

- 1) Establish a Test Mode 1 look back with both 1 12.2kbps RMC channel and a H-Set1 Fixed Reference Channel (FRC). With the 8820 this is accomplished by setting the signal Channel Coding to “Fixed Reference Channel” and configuring for HSET-1 QKSP.
- 2) Set beta values and HSDPA settings for HSDPA Subtest1 according to Table 9-5
- 3) Send continuously Up power control commands to the Gobi2000 module
- 4) Measure the power at the Gobi2000 module’s antenna connector using the power meter with modulated average detector
- 5) Repeat the measurement for the HSDPA Subtest2, 3 and 4 as given in Table 9-5

HSUPA Rel 6

- 1) Use UL RMC 12.2kbps and FRC H-Set1 QPSK, Test Mode 1 loop back. With the 8820 this is accomplished by setting the signal Channel Coding to “E-DCH Test Channel” and configuring the equipment category to Cat6_10ms.
- 2) Set the Absolute Grant for HSUPA Subtest1 according to Table 9-5
- 3) Set the Gobi2000 module power to be at least 5dB lower than the Maximum output power
- 4) Send power control bits to give one TPC_cmd = +1 command to the Gobi2000 module. If the Gobi2000 module doesn’t send any E-DPCH data with decreased E-TFCI within 500ms, then repeat this process until the decreased E-TFCI is reported.
- 5) Confirm that the E-TFCI transmitted by the Gobi2000 module is equal to the target E-TFCI in Table 9-5. If the E-TFCI transmitted by the Gobi2000 module is not equal to the target E-TFCI, then send power control bits to give one TPC_cmd = -1 command to the UE. If UE sends any E-DPCH data with decreased E-TFCI within 500 ms, send new power control bits to give one TPC_cmd = -1 command to the UE. Then confirm that the E-TFCI transmitted by the UE is equal to the target E-TFCI in Table 9-5. If the E-TFCI transmitted by the UE is not equal to the target E-TFCI, then fail the UE
- 6) Repeat the measurement for the HSUPA Subtest2, 3, 4 and 5 as given in Table 9-5

Table 9-5 3GPP Rel99/HSPA Subtest Settings

| | Mode | Rel99 | Rel6 HSDPA | Rel6 HSDPA | Rel6 HSDPA | Rel6 HSUPA | Rel6 HSUPA | Rel6 HSUPA | Rel6 HSUPA | Rel6 HSUPA | | |
|-------------------------|--------------------------------------|----------------|--|------------|------------|------------|------------|--|--|------------|-------|--|
| | Subtest | - | 1 | 2 | 3 | 4 | 1 | 2 | 3 | 4 | 5 | |
| WCDMA General Settings | Loopback Mode | Test Mode 1 | Test Mode 1 | | | | | Test Mode 1 | | | | |
| | Rel99 RMC | 12.2kbps RMC | 12.2kbps RMC | | | | | 12.2kbps RMC | | | | |
| | HSDPA FRC | Not Applicable | H-Set1 | | | | | H-Set1 | | | | |
| | HSUPA Test | Not Applicable | Not Applicable | | | | | HSUPA Loopback | | | | |
| | Power Control Algorithm | Algorithm2 | Algorithm2 | | | | | Algorithm2 | | | | |
| | β_c | Not Applicable | 2/15 | 12/15 | 15/15 | 15/15 | 11/15 | 6/15 | 15/15 | 2/15 | 15/15 | |
| | β_d | Not Applicable | 15/15 | 15/15 | 8/15 | 4/15 | 15/15 | 15/15 | 9/15 | 15/15 | 15/15 | |
| | β_{ec} | Not Applicable | - | - | - | - | 209/225 | 12/15 | 30/15 | 2/15 | 24/15 | |
| | β_c/β_d | 8/15 | 2/15 | 12/15 | 15/8 | 15/4 | 11/15 | 6/15 | 15/9 | 2/15 | 15/15 | |
| | β_{hs} | Not Applicable | 4/15 | 24/15 | 30/15 | 30/15 | 22/15 | 12/15 | 30/15 | 4/15 | 30/15 | |
| HSDPA Specific Settings | β_{ed} | Not Applicable | Not Applicable | | | | | 47/15 | | | | |
| | DACK | Not Applicable | 8 | | | | | 8 | | | | |
| | DNAK | Not Applicable | 8 | | | | | 8 | | | | |
| | DCOI | Not Applicable | 8 | | | | | 8 | | | | |
| | Ack-Nack repetition factor | Not Applicable | 3 | | | | | 3 | | | | |
| | CQI Feedback (Table 5.2B.4) | Not Applicable | 4ms | | | | | 4ms | | | | |
| | CQI Repetition Factor (Table 5.2B.4) | Not Applicable | 2 | | | | | 2 | | | | |
| HSUPA Specific Settings | Ahs = β_{hs}/β_c | Not Applicable | 30/15 | | | | | 30/15 | | | | |
| | D E-DPCCH | Not Applicable | Not Applicable | | | | | 6 | 8 | 8 | 5 | |
| | DHARQ | Not Applicable | Not Applicable | | | | | 0 | 0 | 0 | 0 | |
| | AG Index | Not Applicable | Not Applicable | | | | | 20 | 12 | 15 | 17 | |
| | ETFCI (from 34.121 Table C.11.1.3) | Not Applicable | Not Applicable | | | | | 75 | 67 | 92 | 71 | |
| | Associated Max UL Data Rate kbps | Not Applicable | Not Applicable | | | | | 242.1 | 174.9 | 482.8 | 205.8 | |
| Reference E-TFCIs | | | E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27 | | | | | E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27 | E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27 | | | |
| | | Not Applicable | Not Applicable | | | | | | | | | |

9.4.3 For GSM/GPRS/EGDE

- Configure the call box to support GPRS test.
- Configure for desired number of uplink transmit lots.
- Set MS_TX level to 0 (850 MHz) or 2 (1900MHz) to configure EUT to transmit at maximum output power.

10. Numerical SAR Data

10.1 Numerical Data

Table 10-1 shows the 1 g SAR test data for the two frequency bands tested (Low/Middle/High Channels from each band, see Section 4. SAR Test Matrix for rationale) and for the two positions tested (see Section 7.3 Test Configurations).

Table 10-1 Measured SAR Results

| Band | Mode | Section | Position | Channel | Average Conducted power (dBm) | 1 g SAR (mW/g) | 10 g SAR (mW/g) |
|-------------|-------------|----------------|--------------------|----------------|--------------------------------------|-----------------------|------------------------|
| GSM850 | GPRS-2UL | Flat | Tablet | 128 | 24.9 | 0.277 | 0.199 |
| GSM850 | GPRS-2UL | Flat | Tablet | 190 | 24.8 | 0.313 | 0.224 |
| GSM850 | GPRS-2UL | Flat | Tablet | 251 | 24.8 | 0.286 | 0.201 |
| GSM850 | GPRS-2UL | Flat | Secondary Portrait | 128 | 24.9 | 0.168 | 0.110 |
| GSM850 | GPRS-2UL | Flat | Secondary Portrait | 190 | 24.8 | 0.211 | 0.136 |
| GSM850 | GPRS-2UL | Flat | Secondary Portrait | 251 | 24.8 | 0.172 | 0.111 |
| PCS | EVDOr0 | Flat | Tablet | 25 | 24.67 | 0.553 | 0.345 |
| PCS | EVDOr0 | Flat | Tablet | 600 | 24.70 | 0.600 | 0.365 |
| PCS | EVDOr0 | Flat | Tablet | 1175 | 24.71 | 0.477 | 0.299 |
| PCS | EVDOr0 | Flat | Secondary Portrait | 25 | 24.67 | 0.177 | 0.112 |
| PCS | EVDOr0 | Flat | Secondary Portrait | 600 | 24.70 | 0.172 | 0.102 |
| PCS | EVDOr0 | Flat | Secondary Portrait | 1175 | 24.71 | 0.137 | 0.0788 |