

inGeo1 AW Conducted Test Report

FCC Part 22 & 24 Certification	
FCC ID:	J9CINGE02
Model:	inGeo1 AW

STATEMENT OF CERTIFICATION	
<p><i>The data, data evaluation and equipment configuration represented herein are a true and accurate representation of the measurements of the sample's radio frequency interference emissions characteristics as of the dates and at the times of the test under the conditions herein specified.</i></p>	
Test performed by:	QUALCOMM Incorporated 5775 Morehouse Drive San Diego, CA 92121-1714
Report Prepared by:	QUALCOMM Incorporated 5775 Morehouse Drive San Diego, CA 92121-1714
Tests that required an OATS site were performed by Nemko Product Services.	



Table of Contents

1. INTRODUCTION AND PURPOSE	3
2. DESCRIPTION OF DEVICE UNDER TEST.....	3
3. TEST SUMMARY	3
4. RF POWER OUTPUT VERIFICATION.....	3
4.1 BASE STATION EMULATOR SETTINGS AND MEASUREMENT PROCEDURES	3
4.1.1 For CDMA2000 1x	4
4.2 TEST RESULTS	5
5. OCCUPIED BANDWIDTH.....	6
5.1 TEST PROCEDURES	6
5.2 TEST RESULTS	7
5.3 PLOTS	9
6. BLOCK EDGE COMPLIANCE	11
6.1 TEST PROCEDURES	11
6.2 TEST RESULTS	12
6.3 PLOTS	13
7. OUT OF BAND EMISSION AT ANTENNA TERMINALS	14
7.1 TEST PROCEDURE	14
7.2 TEST RESULT	15
7.3 PLOTS	16
8. FREQUENCY STABILITY	19
8.1 TEST PROCEDURE	19
8.2 TEST RESULTS	20
9. TEST EQUIPMENT AND FIRMWARE	22

1. Introduction and Purpose

This document provides the FCC test data for Qualcomm inGeo1 AW Human Tracking Terminal (HTT). The tests included in this report are limited to all conducted tests required. The radiated tests were performed at Nemko USA, Inc. in San Diego, CA, and are reported in a separate document.

2. Description of Device Under Test

The inGeo1 AW device is a dedicated Human Tracking Terminal (HTT). It is a 50 gram, 40mm x 70 mm x 16mm sized device, targeted for toddlers, school age children, elderly and other users that need or desired to be tracked. The HTT is designed to be placed in a user’s bag or attached to a belt or other article of clothing. While CDMA2000 1X compliant, the HTT design is optimized for minimal cost, minimal size, maximum battery life and superb position location performance. The device uses A-GPS to obtain position location and sends this information back to the network by SMS data packets. For the most active mode of operation, a position fix occurs about every 10 seconds followed by a 3 second SMS message. Other modes of simplified operation request position fixes less often. The hibernation mode extends the battery life beyond normal cellular phone standby time. Hibernation technology comprises of several innovative modes of battery saving. Smart mechanism selects the best fit mode based on future activities of the device. The inGeo1 AW device incorporates internal antennas for both WWAN and GPS.

Only 850 MHz (Cellular) and 1900 MHz (PCS) bands are used for operation. The DUT is a pre-production sample.

3. Test Summary

FCC/IC Rule	Description of Test	Result	Page
§2.1046	RF Power Output	Complies	3
§2.1049	Occupied Bandwidth	Complies	6
§22.359, 24.238	Block Edge Requirement	Complies	11
§2.1051, 22.917, 24.238(a)	Out of Band Emission at Antenna Terminals	Complies	14
§2.1055, 22.355, 24.235	Frequency Stability vs. Temperature vs. Voltage	Complies	19
§1.1310, 2.1091	RF Exposure	Complies	See Exhibit 4
§2.1053, 22.917, 24.238(a)	Field Strength of Spurious Radiation	Complies	See Exhibit 3


4. RF Power Output Verification

FCC:	§ 2.1046 , 24.232(d)
Limit:	n/a
DUT SN	0714CC2B

4.1 Base Station Emulator Settings and Measurement Procedures

As shown in the figure below, connect the transmitter output of the inGeo1 AW to the communication test set (8820B or 8960) and configure it to operate at maximum power in a call. Measure the power at three equally spaced operating frequencies for each band.

Use the build-in power measurement capability in the Agilent 8960 box to measure CDMA 1x conducted power outputs. The relevant cable loss is measured for the specific frequencies under test and added as a correction factor for all the tests.

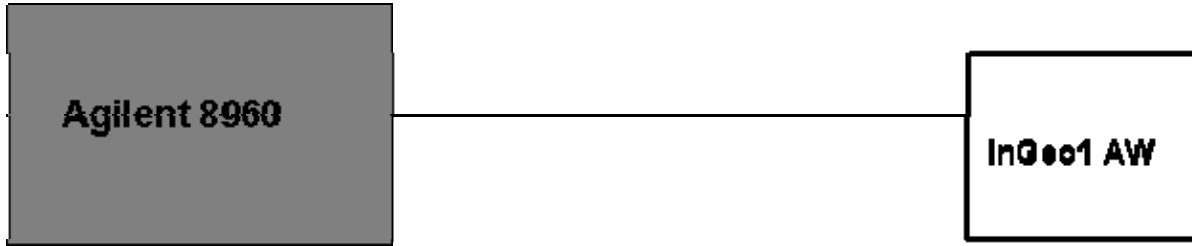

4.1.1 For CDMA2000 1x

Measure the power at Ch1013, 384 and 777 for US cell; Ch25, 600 and 1175 for US PCS band.

1xRTT

Use CDMA2000 Rev 6 protocol in the call box 8960.

- 1) Test for Reverse/Forward TCH RC1 and RC3 Reverse FCH and demodulation of RC 3.
 - a. Set up a call using Fundamental Channel Test Mode 1 (RC1, SO 2) with 9600 bps data rate only.
 - b. As per C.S0011 or TIA/EIA-98-F Table 4.4.5.2-1, set the test parameters as shown in Table 4-1.
 - c. Send continuously '0' power control bits to the UNDP-1.
 - d. Measure the output power at inGeo1AW antenna connector as recorded on the power meter with values corrected for cables losses.
 - e. Repeat step b through d for Fundamental Channel Test Mode:
 - i. RC3, SO55

Table 4-1 Parameters for Max. Power with a single traffic code channel, SR1

Parameter	Units	Value
I_{or}	dBm/1.23 MHz	-104
$\frac{\text{Pilot } E_c}{I_{or}}$	dB	-7
$\frac{\text{Traffic } E_c}{I_{or}}$	dB	-7.4

4.2 Test Results

CDMA2000 1x

Mode Conducted Power	Test Case			Cell Channel			PCS Channel		
	#	FWD RC/TAP	REV RC/TAP	1013	384	777	25	600	1175
	1	RC3	RC3 (SO55)	23.97	24.07	23.84	24.06	23.81	23.95

Mode Conducted Power PAR	Test Case			Cell Channel			PCS Channel		
	#	FWD RC/TAP	REV RC/TAP	1013	384	777	25	600	1175
	1	RC3	RC3 (SO55)	N/A	N/A	N/A	3.26	3.57	3.36


5. Occupied Bandwidth

FCC:	§2.1049
Limit:	n/a
DUT SN	0714CC2B
Modes Tested	CDMA 1x
	▪ RC3 SO55

5.1 Test Procedures

As Figure below indicates, the inGeo1 AW device was connected to the call simulator test box through a calibrated coaxial cable and directional coupler. The coupled port of the coupler was connected to the spectrum analyzer. Occupied bandwidth (defined as the 99% power bandwidth) was measured using the PSA internal measurement personality feature.

Testing was completed using the Agilent 8960 for the CDMA 1x measurement.

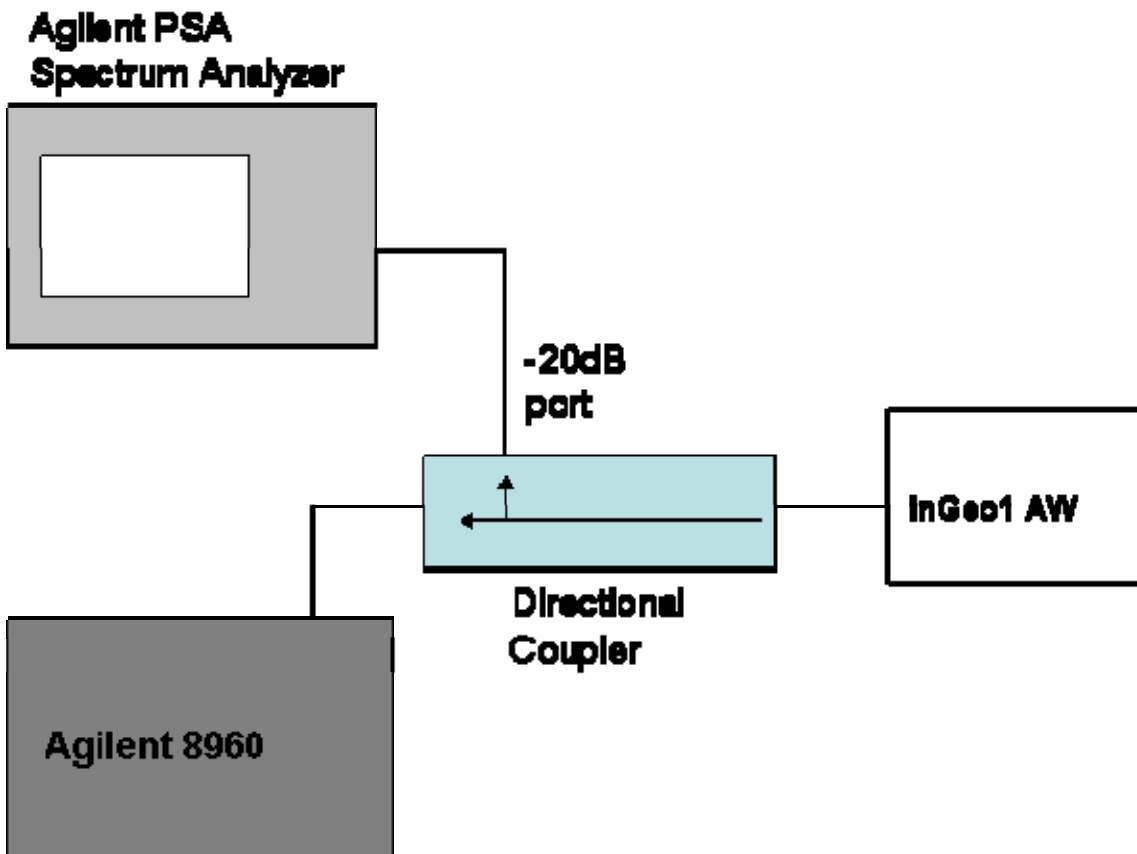


5.2 Test Results

The occupied bandwidth was measured at low, mid and high channel in each band.


Mode		Frequency (MHz)	Channel	99% Occupied Bandwidth (MHz)	Plot number
CDMA1x/ 1x-EVDO	RC3 SO55	824.7	1013	1.2837	Plot 5.2 - 1
		836.52	384	1.2768	Plot 5.2 - 2
		848.31	777	1.2734	Plot 5.2 - 3
		1851.25	25	1.2742	Plot 5.2 - 4
		1880	600	1.2750	Plot 5.2 - 5
		1908.75	1175	1.2778	Plot 5.2 - 6

5.3 Plots


Plot 5.2 - 1 (Ch1013, RC3 SO55)

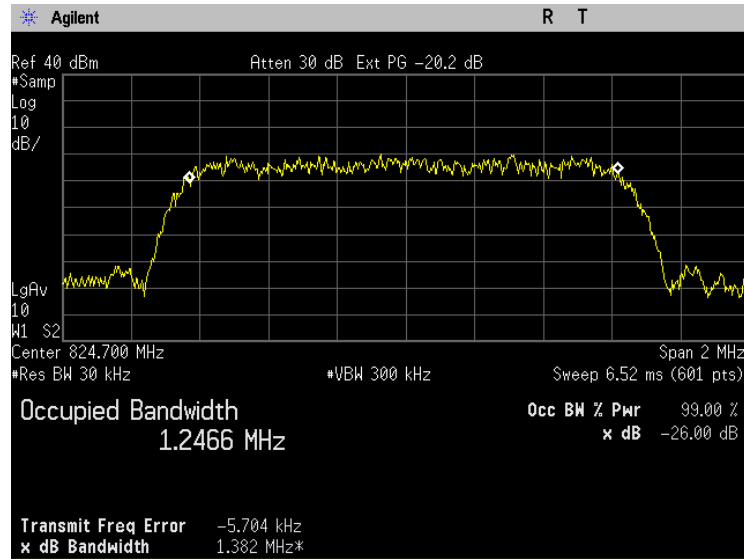


Plot 5.2 - 2 (Ch384, RC3 SO55)

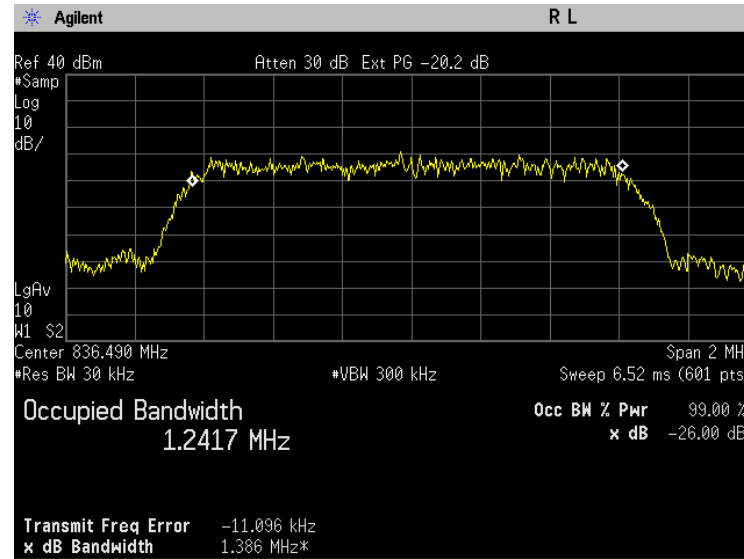


Plot 5.2 - 3 (Ch777, RC3 SO55)

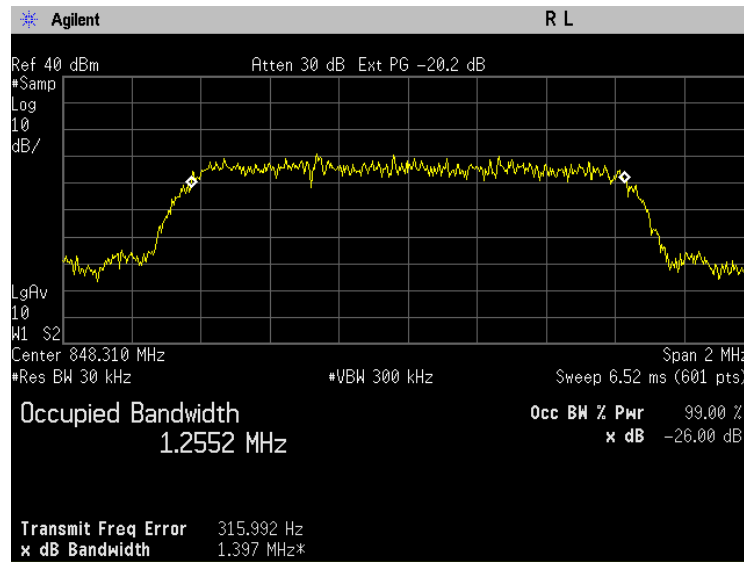


Plot 5.2 - 4 (Ch25, RC3 SO55)

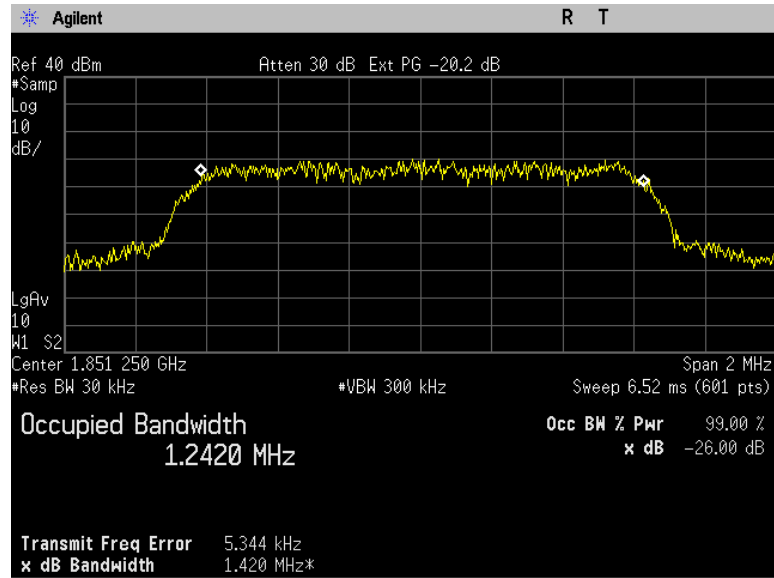

Plot 5.2 - 5 (Ch600, RC3 SO55)

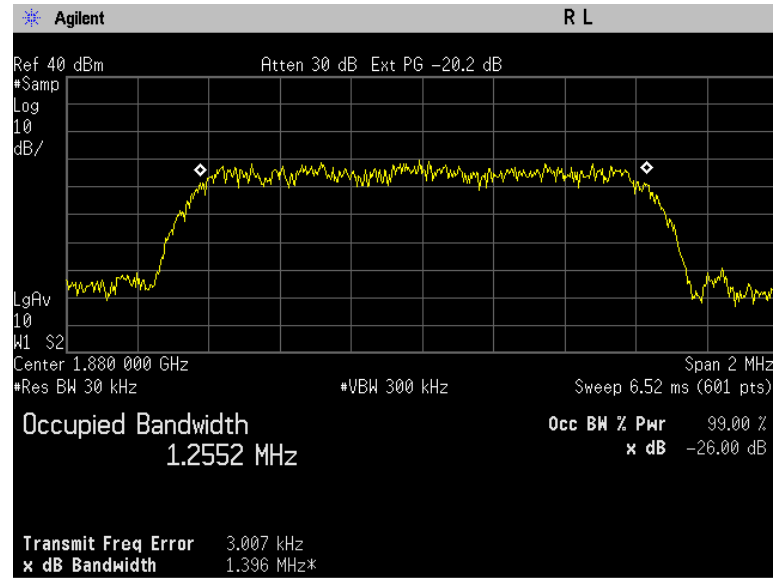

Plot 5.2 - 6 (Ch1175, RC3 SO55)

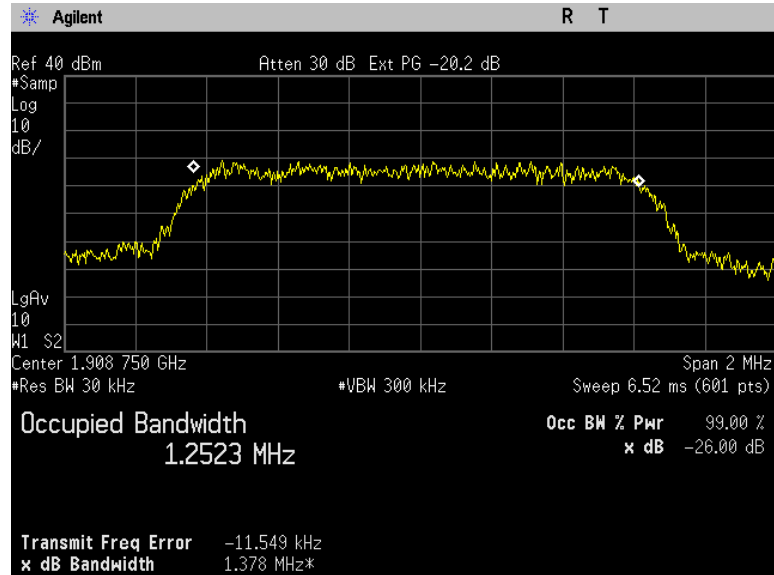

6. Block Edge Compliance

FCC:	§22.359, 24.238
Limit:	-13dBm
DUT SN	0714CC2B
Modes Tested	CDMA 1x
	▪ RC3 SO55


6.1 Test Procedures

As Figure below indicates, the inGeo1 AW device was connected to the call simulator test box through a calibrated coaxial cable and directional coupler. The coupled port of the coupler was connected to the spectrum analyzer. Block edge emissions were measured at the required operating frequencies in each band on the spectrum analyzer.

For Each block edge measurement:

- Set the spectrum analyzer span to include the block edge frequency (824, 848, 1850, 1910MHz)
- Set a marker to point the corresponding block edge frequency in each test case
- Set display line at -13dBm
- Set resolution bandwidth to at least 1% of emission BW
- Set video averaging to 10 samples

Testing was completed using the Agilent 8960 for CDMA 1x.

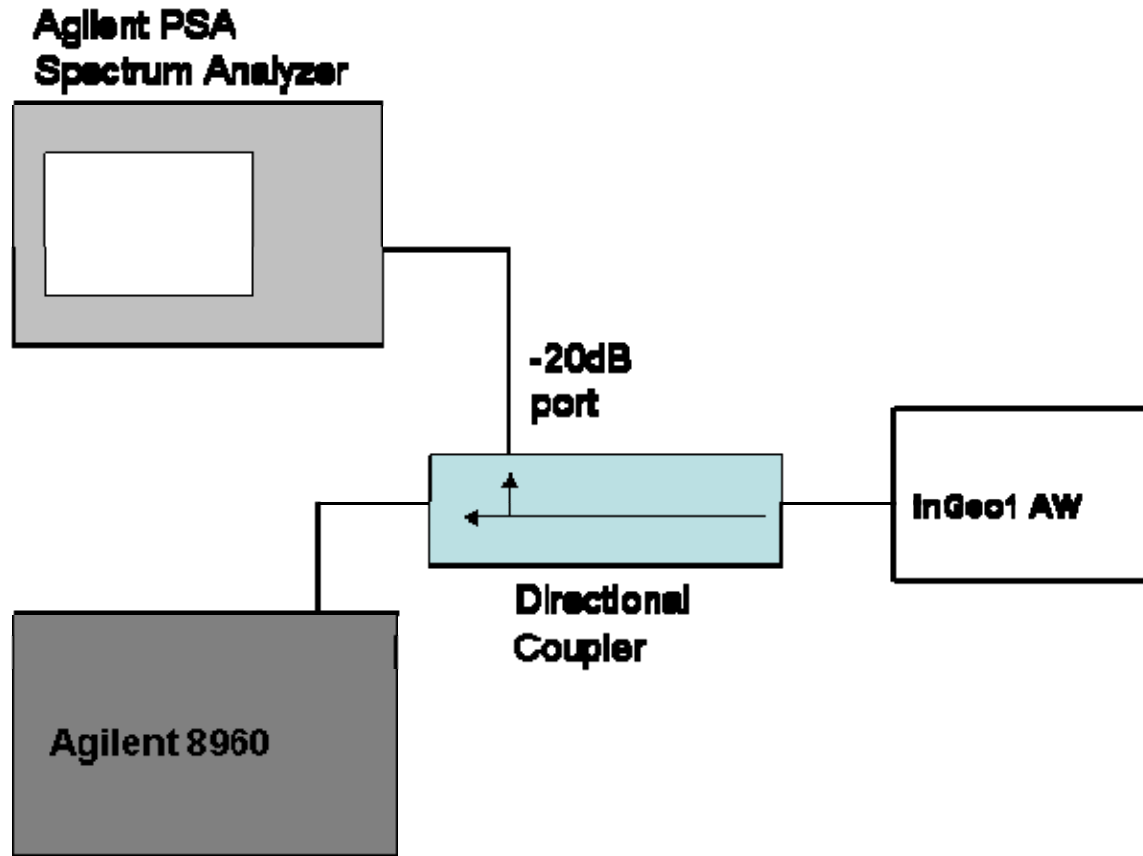


6.2 Test Results

The test was conducted at block edges in each band


Mode		Frequency (MHz)	Channel Tested	Corresponding Plot number	Test Result
CDMA 1x	RC3 SO55	824	1013	Plot 6.2 - 1	Complies
		849	777	Plot 6.2 - 2	Complies
		1850	25	Plot 6.2 - 3	Complies
		1910	1175	Plot 6.2 - 4	Complies

6.3 Plots


Plot 6.3-1 (Ch1013, RC3 SO55)

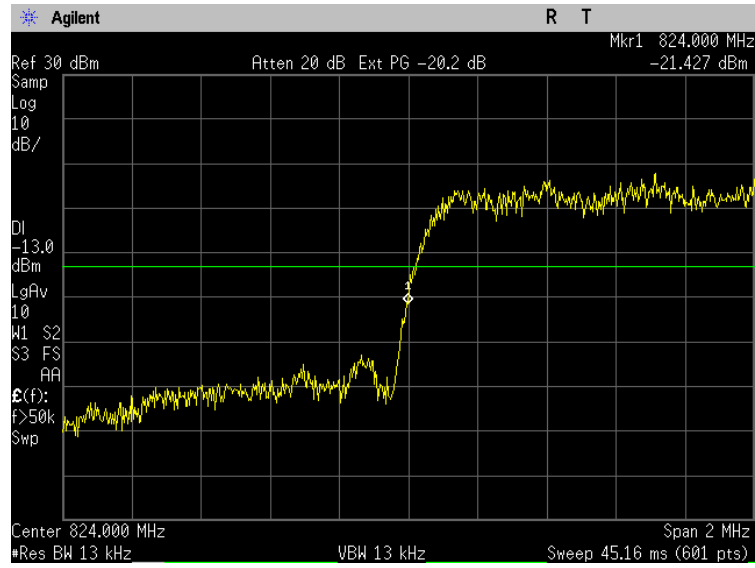


Plot 6.3-2 (Ch777, RC3 SO55)

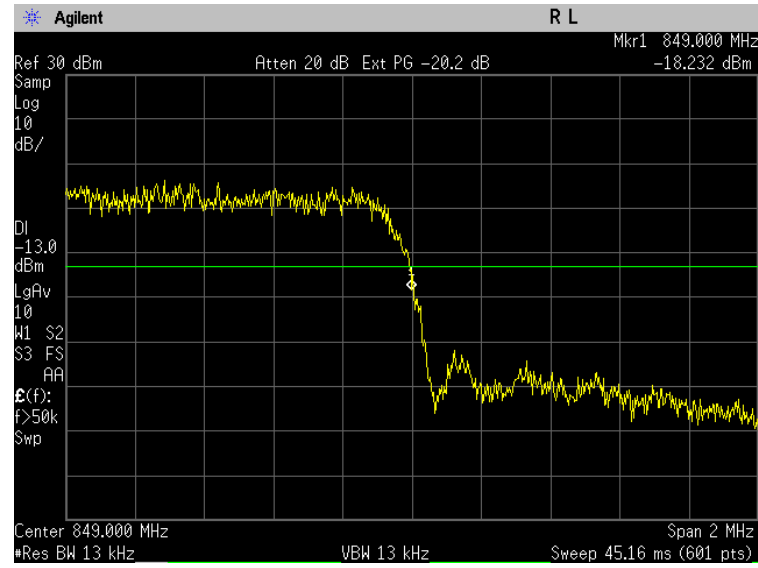

Plot 6.3-3 (Ch25, RC3 SO55)

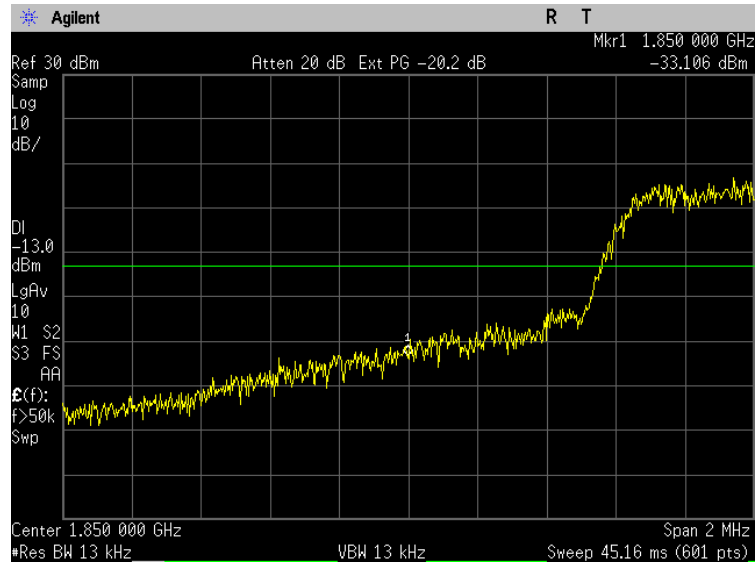

Plot 6.3-4 (Ch1175, RC3 SO55)

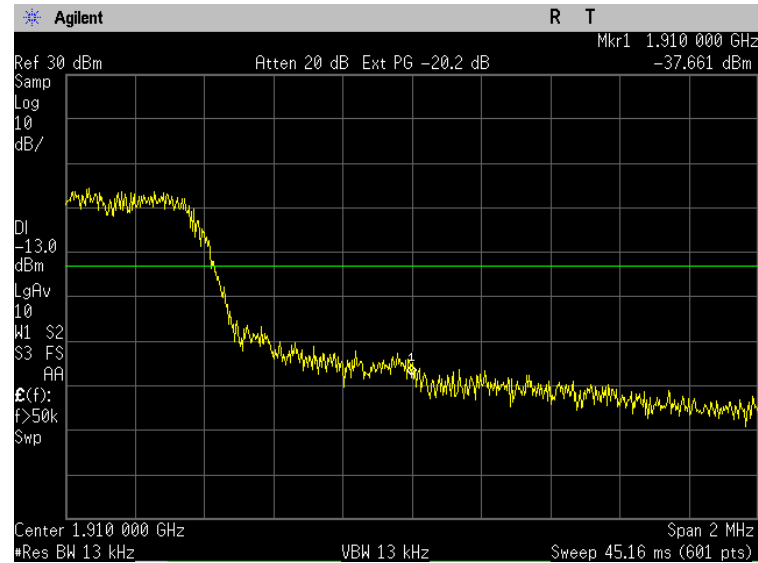


7. Out of Band Emission at Antenna Terminals

FCC:	§22.901(d), 22.917, 24.238 (a)
Limit:	-13dBm
DUT SN	0714CC2B
Modes Tested	CDMA 1x
	RC3 SO55

7.1 Test Procedure

As Figure below indicates, the inGeo1 AW device was connected to the call simulator test box through a calibrated coaxial cable and directional coupler. The coupled port of the coupler was connected to the spectrum analyzer. The PSA was used to scan the out-of-band emission up to 10th harmonics. RBW and VBW were set to 100kHz for measurements below 1GHz and 1MHz for testing above 1GHz. Recorded multiple sweeps in maximum hold mode using a peak detector to ensure that the worst case emission were caught.

Testing was completed using the Agilent 8960 for CDMA 1x measurement testing.

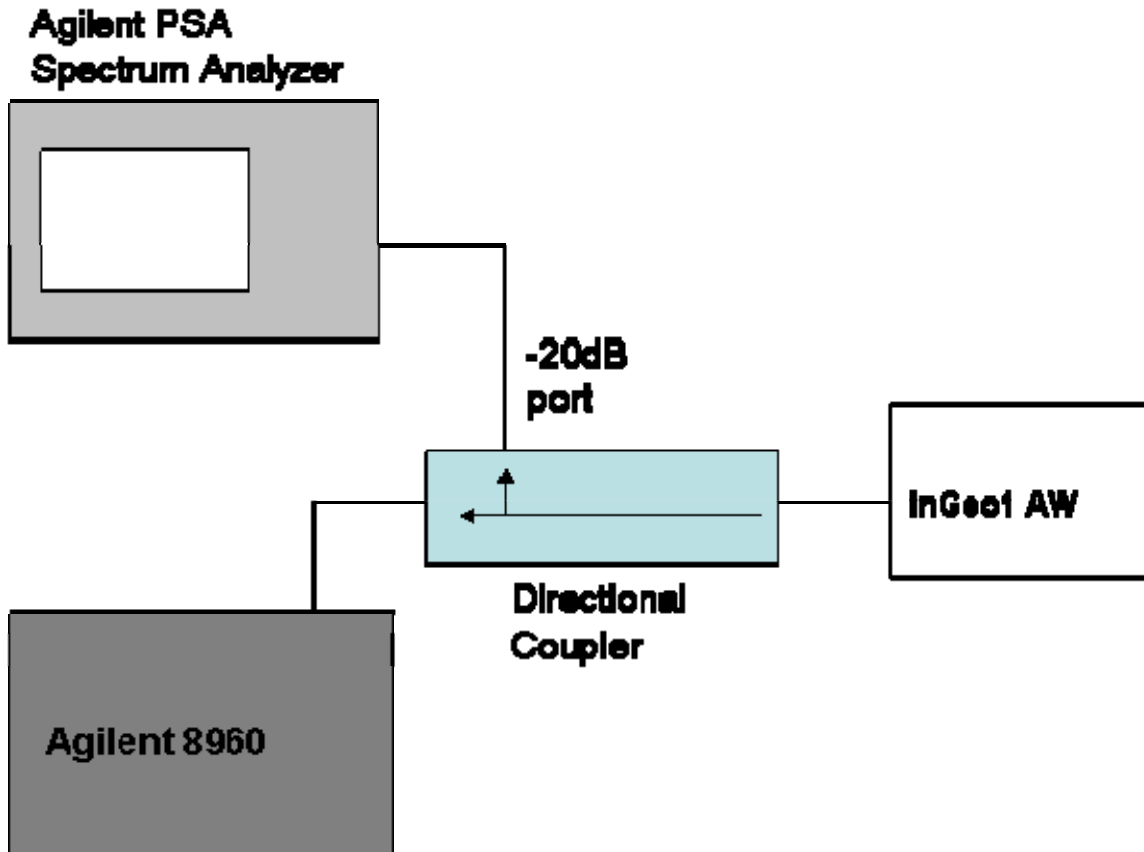


7.2 Test Result

The test was conducted at low, mid and high channel in each band.


Mode		Frequency (MHz)	Channel Tested	Corresponding Plot number	Test Result
CDMA1x	RC3 SO55	0 ~ 20 GHz	1013	Plot 7.2 – 1,2	Complies
		0 ~ 20 GHz	384	Plot 7.2 – 3,4	Complies
		0 ~ 20 GHz	777	Plot 7.2 – 5,6	Complies
		0 ~ 20 GHz	25	Plot 7.2 – 7,8	Complies
		0 ~ 20 GHz	600	Plot 7.2 – 9,10	Complies
		0 ~ 20 GHz	1175	Plot 7.2 – 11,12	Complies

7.3 Plots


Plot 7.3 -1 (Ch1013, RC3 SO55)

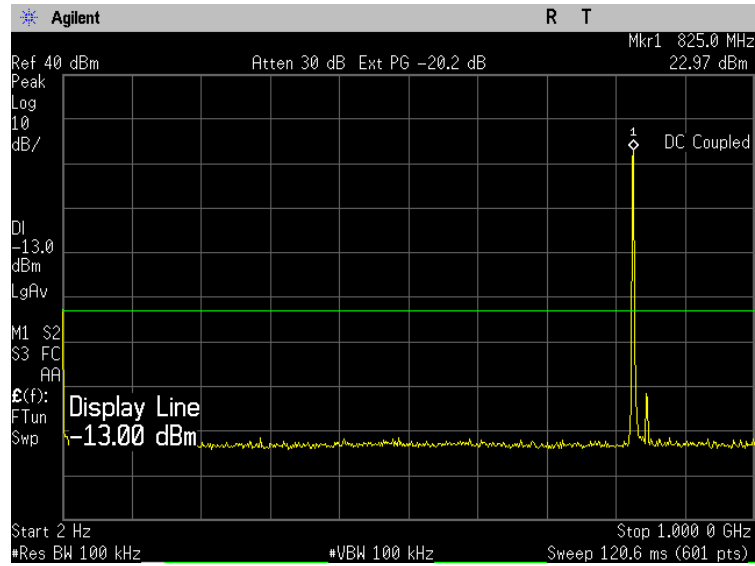


Plot 7.3-2 (Ch1013, RC3 SO55)

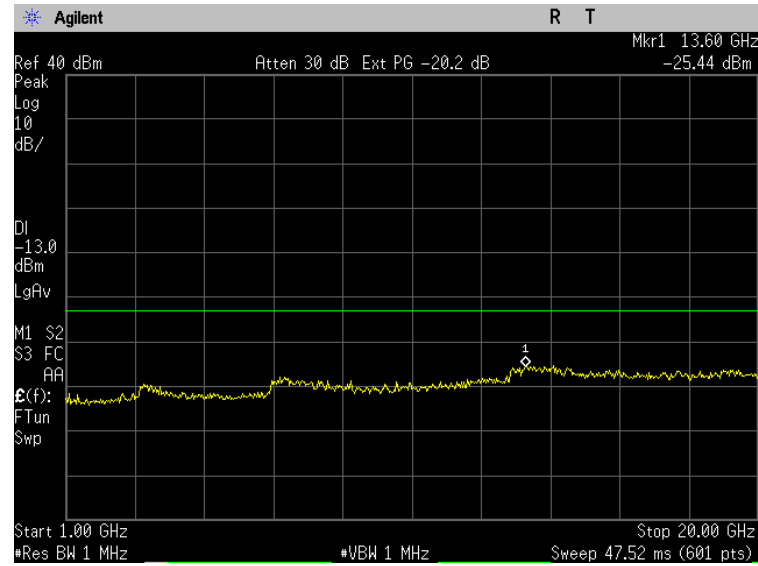



Plot 7.3-3 (Ch383, RC3 SO55)

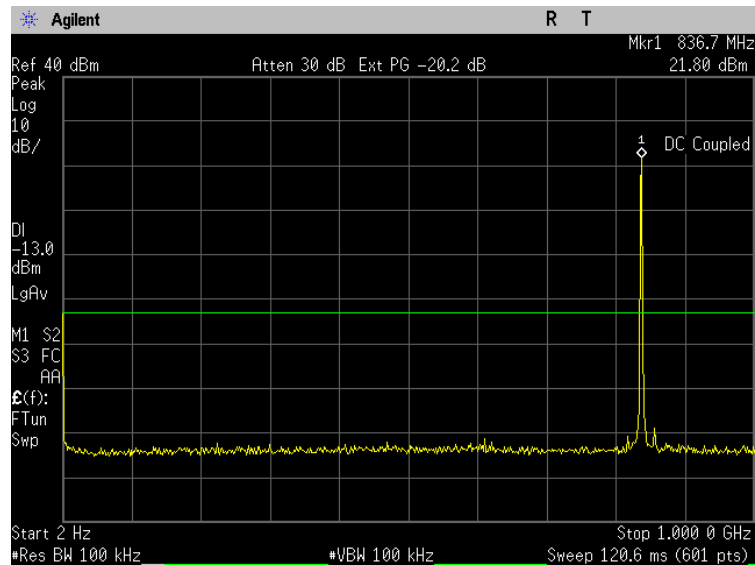

Plot 7.3-4 (Ch383, RC3 SO55)

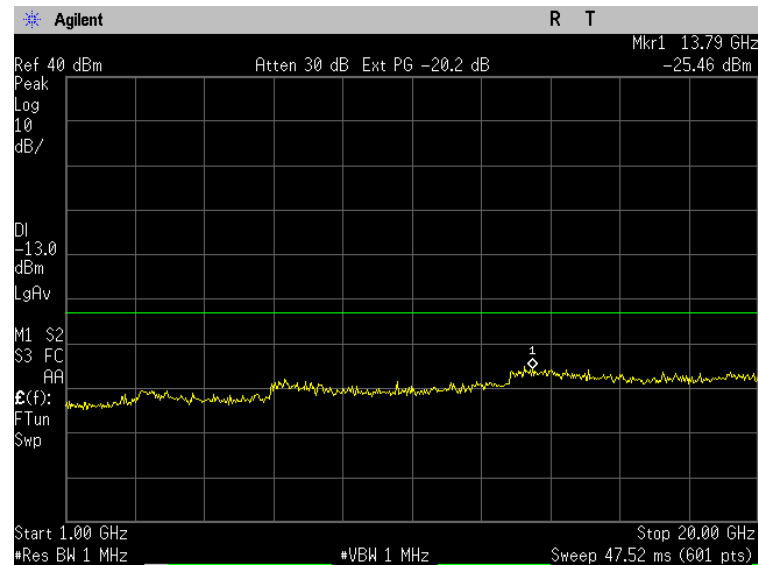

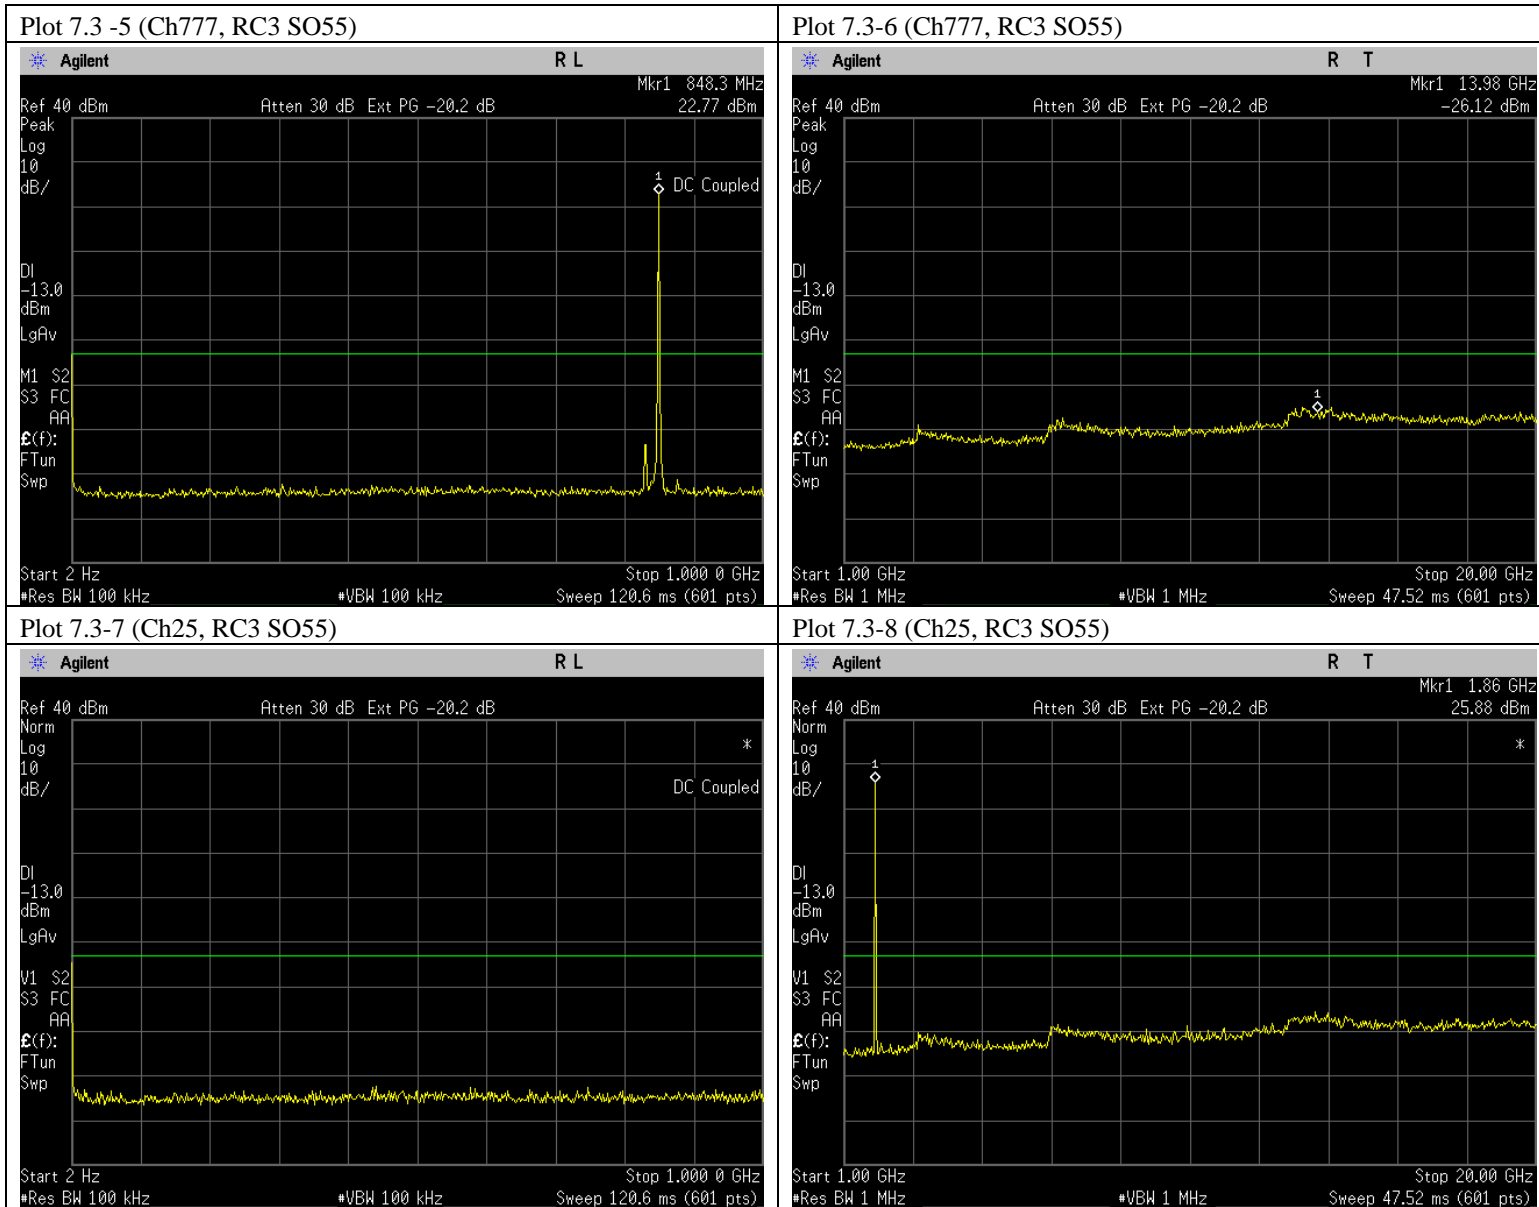

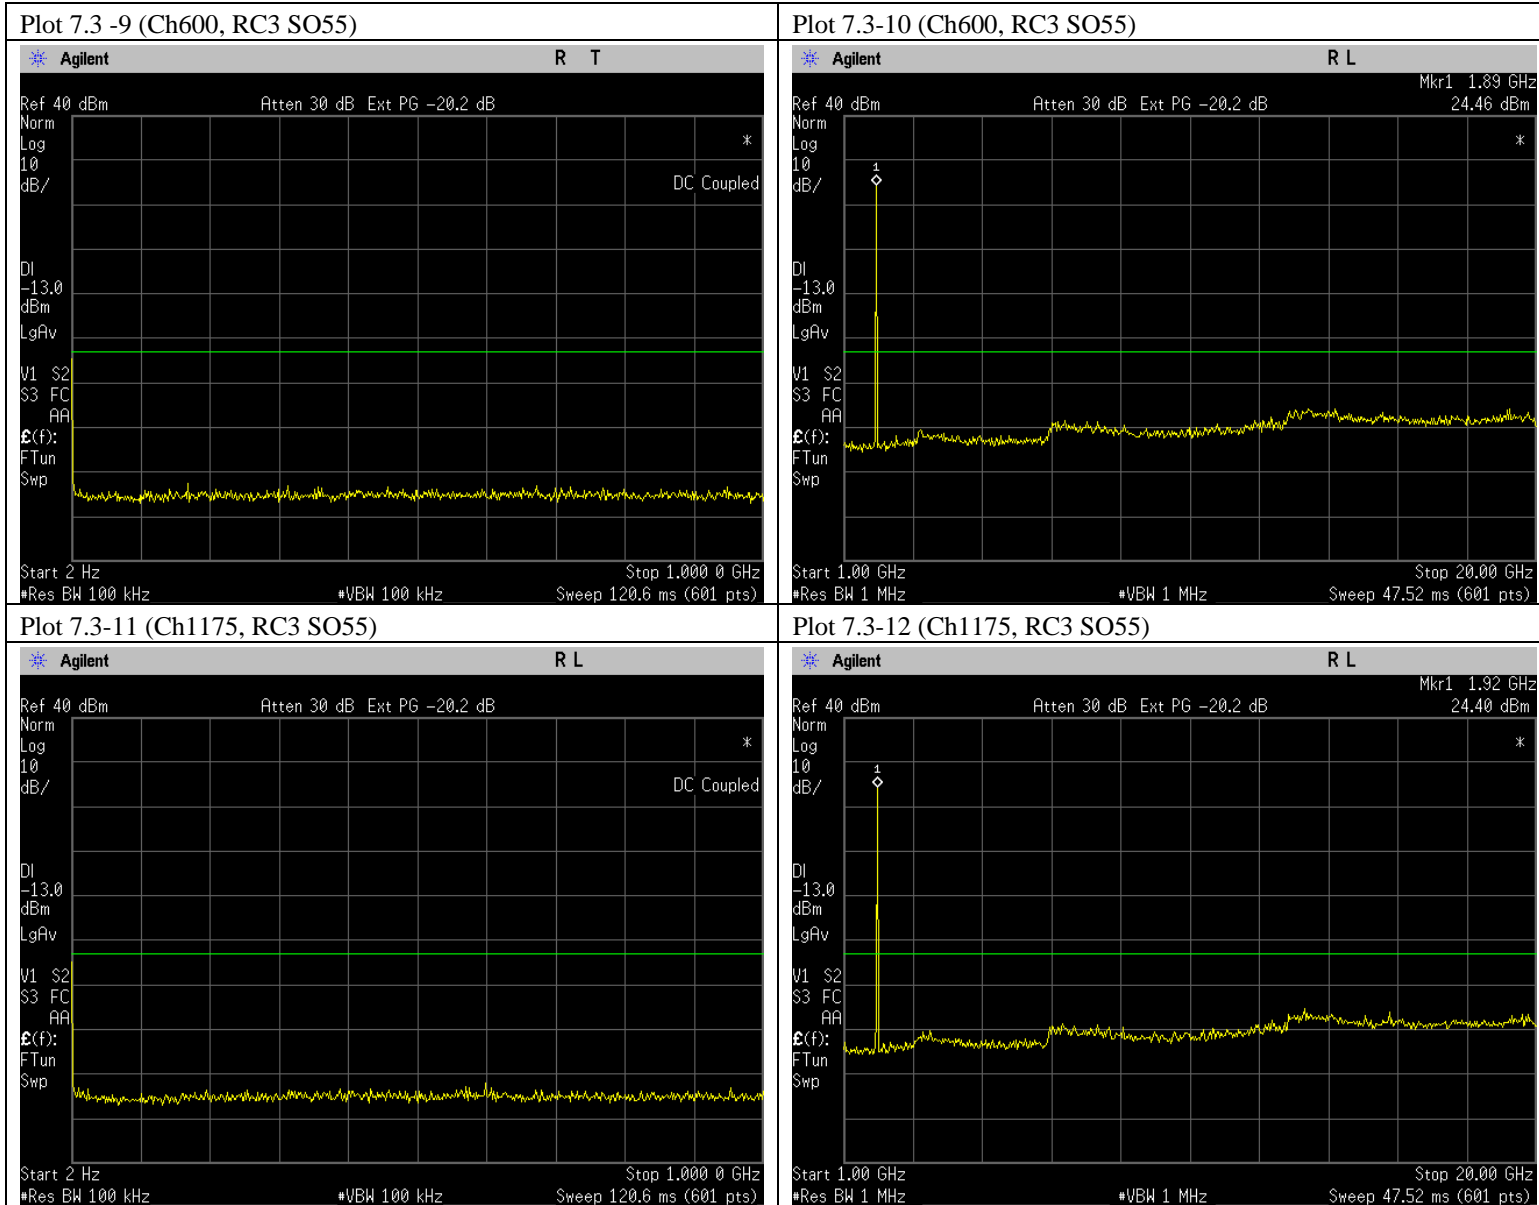


8. Frequency Stability

FCC:	§2.1055, 22.355, 24.235
Limit:	±2.5ppm
DUT SN	0714CC2B
Modes Tested	CDMA 1x
	RC3 SO55

8.1 Test Procedure

As the test setup indicates, inGeo1 AW was placed inside the temperature chamber. Transmitting frequency error was measured at 20 degrees C with DC voltage varying from 3.2 volts to 4.2 volts, and then set the temperature to -30 degrees C and allow it to stabilize. After 1 hour soak time, the transmitting frequency error measurement was recorded at -30 degrees. The process was repeated at an incremental of 10 degrees C until +60 degrees C is completed.

Testing was completed using the Agilent 8960 for CDMA 1x.

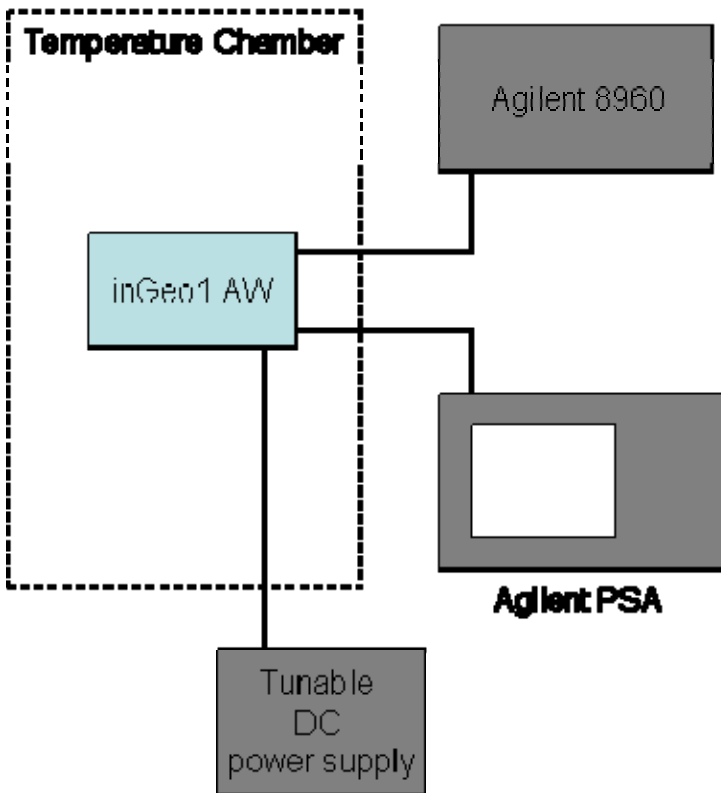


8.2 Test Results

The test was conducted at mid channel in each band.

Operation Mode:	CDMA 1x	Channel:	383
Tx Frequency:	836.49MHz	Voltage:	3.7v (3.2v ~ 4.2v)
Limit:	±2.5ppm (±2091Hz)		

Carrier Frequency Reference at 25 Degrees C: 836 489 910 Hz


temp (C)	variation from carrier frequency reference (Hz)						specification	
	3.2V	3.4V	3.6V	3.8V	4.0V	4.2V	lower limit	upper limit
-30	-18	22	42	47	82	62	-2091	2091
-20	68	47	30	10	0	-60	-2091	2091
-10	-7	-5	13	38	25	42	-2091	2091
0	0	2	17	35	80	43	-2091	2091
10	-8	33	83	209	158	167	-2091	2091
20	25	8	-17	92	125	8	-2091	2091
30	-13	-38	-30	6	-18	-5	-2091	2091
40	-232	-48	-15	2	-38	-27	-2091	2091
50	-80	-110	-72	-18	-40	-87	-2091	2091
60	-68	-57	-142	-43	-85	-28	-2091	2091

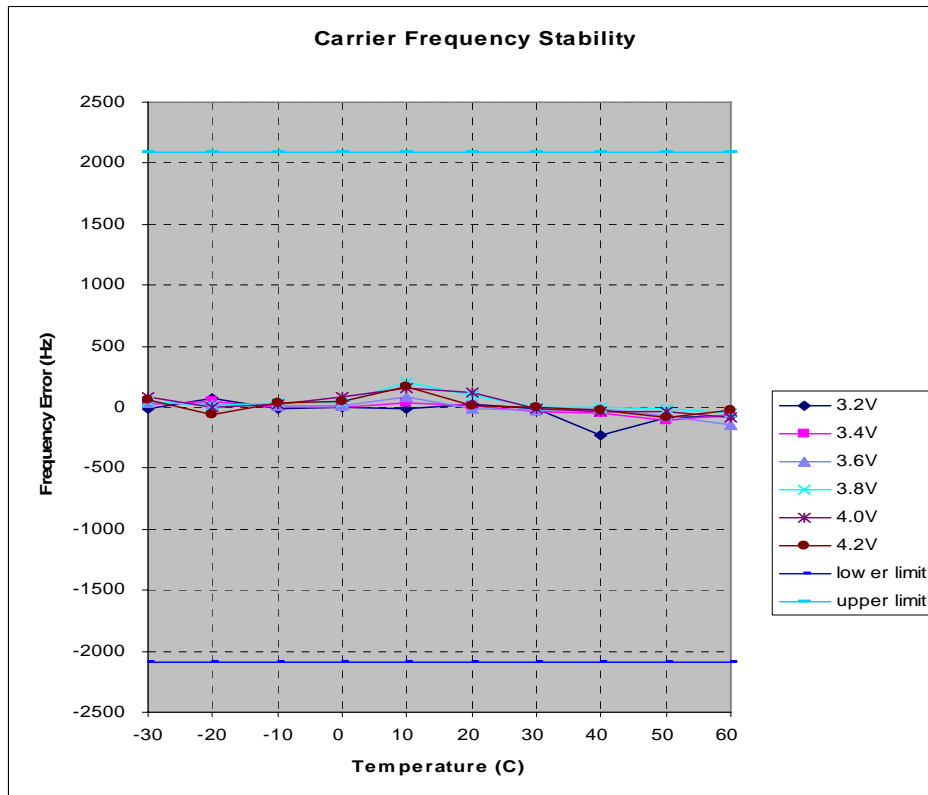

Operation Mode:	CDMA 1x PCS	Channel:	600
Tx Frequency:	1880MHz	Voltage:	3.7v (3.2v ~ 4.2v)
Limit:	±2.5ppm (±4700Hz)		

Carrier Frequency Reference at 25 C: 1,879,999,544 Hz

temp. (C)	transmitter carrier frequency (MHz)						specification	
	3.2V	3.4V	3.6V	3.8V	4.0V	4.2V	lower limit	upper limit
-30	-30	-27	2	45	22	57	-4700	4700
-20	-17	-25	-15	14	47	42	-4700	4700
-10	-40	-22	-7	22	43	28	-4700	4700
0	-88	-13	-17	-12	-2	3	-4700	4700
10	-57	-23	-25	0	-28	2	-4700	4700
20	-13	2	-7	-3	4	-2	-4700	4700
30	-17	-13	-43	12	-30	-45	-4700	4700
40	-70	-92	-62	-17	-67	-47	-4700	4700
50	2	-77	-50	-48	-45	-55	-4700	4700
60	-37	-242	-122	-85	-95	-123	-4700	4700

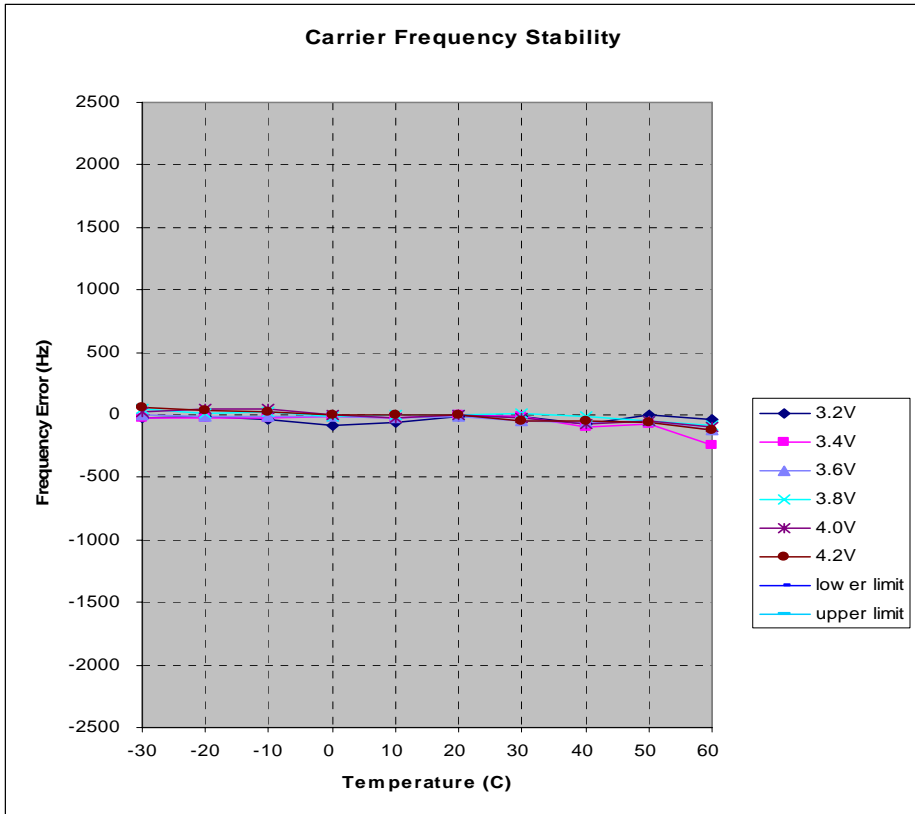

9. Test Equipment and Firmware

The following test equipments were used.

Model	Manufacturer	Description	S/N	Cal Data	Cal Due Date
8960 Series 10 E5515C	Agilent	Wireless Communication Set	K113695	03/06/2008	03/06/2009
E4440A PSA Series	Agilent	Spectrum Analyzer	K159342	09/01/2007	09/01/2008
Model 105	TestEquity	Temperature Chamber	K141144	08/12/2007	08/12/2008

The firmware built in the 8960 was used to test the inGeo1 AW device.

Call Box	Technology	Firmware Rev
8960	1x	B.12.21