

QCARD7280 WLAN Antenna Spec. Form

PIFA 2.4-5G Hong-Bo Part 260-25094 PUBLIC REPORT

MH80-43641-602 Rev. AB

September 14, 2022

Customer- or Supplier-Furnished Item Distribution: This item contains another company's information. No intellectual property rights or license rights are granted by Qualcomm Incorporated and/or its subsidiaries in or to this item, nor are any representations made with respect to its contents.

All Qualcomm products mentioned herein are products of Qualcomm Technologies, Inc. and/or its subsidiaries.

Qualcomm is a trademark or registered trademark of Qualcomm Incorporated. Other product and brand names may be trademarks or registered trademarks of their respective owners.

This technical data may be subject to U.S. and international export, re-export, or transfer ("export") laws. Diversion contrary to U.S. and international law is strictly prohibited.

Regulatory WLAN Antenna Information (Template)

English Language Required for Regulatory Review / Approval

Platform information					
Brand	Tester's name	Tester's signature	platform (ex: Yes, No or NA)	Platform type (ex: regular NB, convertible PC, AIO...etc)	*SAR minimum separation (mm)
Hong-Bo	Eason Tseng	<i>Eason Tseng</i>		WiFi PIFA	
<p>*****Please fill in exact product model name and make sure the model name is visible on product cover or any parts for end users recognize for authority inspection.</p>					
Antenna information					
Vendor	Type	Antenna Part number (Main)			
Hong-Bo	PIFA	260-25094			
Peak gain w/ cable loss (dBi)*					
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz
Main	3.53	3.06	3.07	4.81	4.2

Table of contents

1. Applicable test method
2. Test & System Description
 - a. Test setup
 - b. Equipment list
3. Setup photo

[Section 1. Antenna Assembly Specifications](#)

[Section 2. Radiation characteristics of antenna loaded in Host Platform](#)

1. Applicable test methods

This test report is prepared for PIFA antenna testing under a AMS-8500 Full Anechoic Chamber.


ETS-Lindgren AMS-8500 system is 3D fully anechoic chamber, it is applied to the "Conical Cut test method" the detail description is described as below,

The Conical Cut method requires the ability of the Measurement Antenna to be physically rotated in the theta plane (overhead) of the EUT for implementations using a single Measurement Antenna, Eleven conical cuts are required to capture data at every 15 degrees from the EUT, with the top (0 degrees) and bottom (180 degrees) cuts not being measured. Typically, the EUT will remain affixed to a turntable during the entire measurement process. The Measurement Antenna will be positioned at a starting theta angle.

The EUT will then be rotated around the full 360 degrees of phi rotation, The Measurement Antenna will then be positioned at the next theta angle, and the process repeated.

		θ -Axis	Φ -Axis
Passive	Step size	15°~165° step: 15°	0°~345° step: 15°
	N / M (Points)	12	24


2. Test & System Description

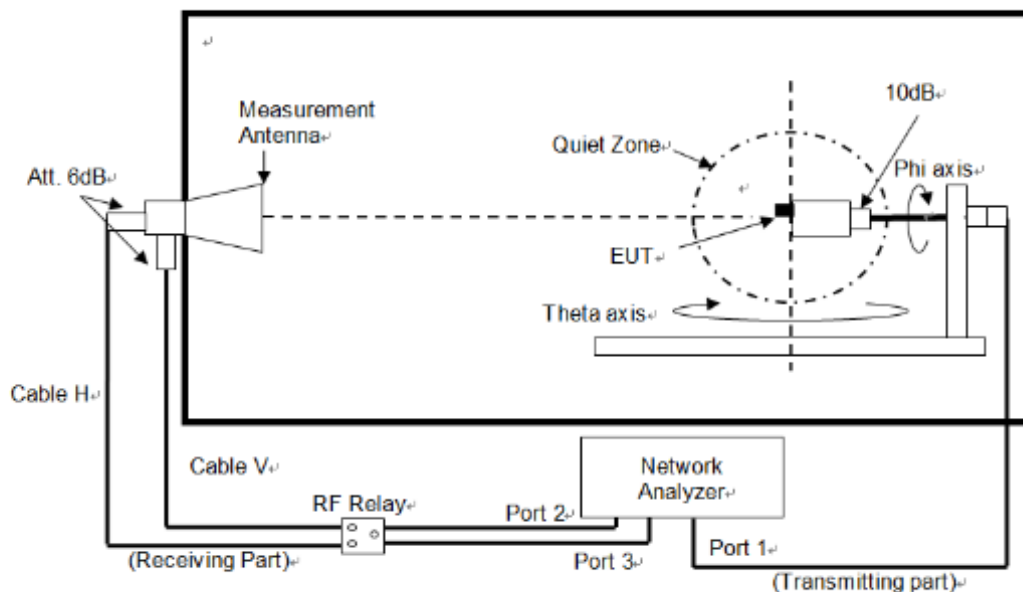

b. Equipment list

Name	Manufacture	Type/Model	Serial Number	Cal. Date	Cal. Due Date
ENA Series Network Analyze	Keysight	E5071C	MY46108594	2021/8/3	2023/8/3
RF Switch	Keysight	3499A	MY4200955	NCR	NCR
Multi-Axis Positioner Controller	ETS-Lindgren	2090	N/A	NCR	NCR
Medium-Duty Positioner	ETS-Lindgren	2015	N/A	NCR	NCR
Measurement Horn Antenna	EMCO	Aug-64	86722	NCR	NCR

3. Setup photo

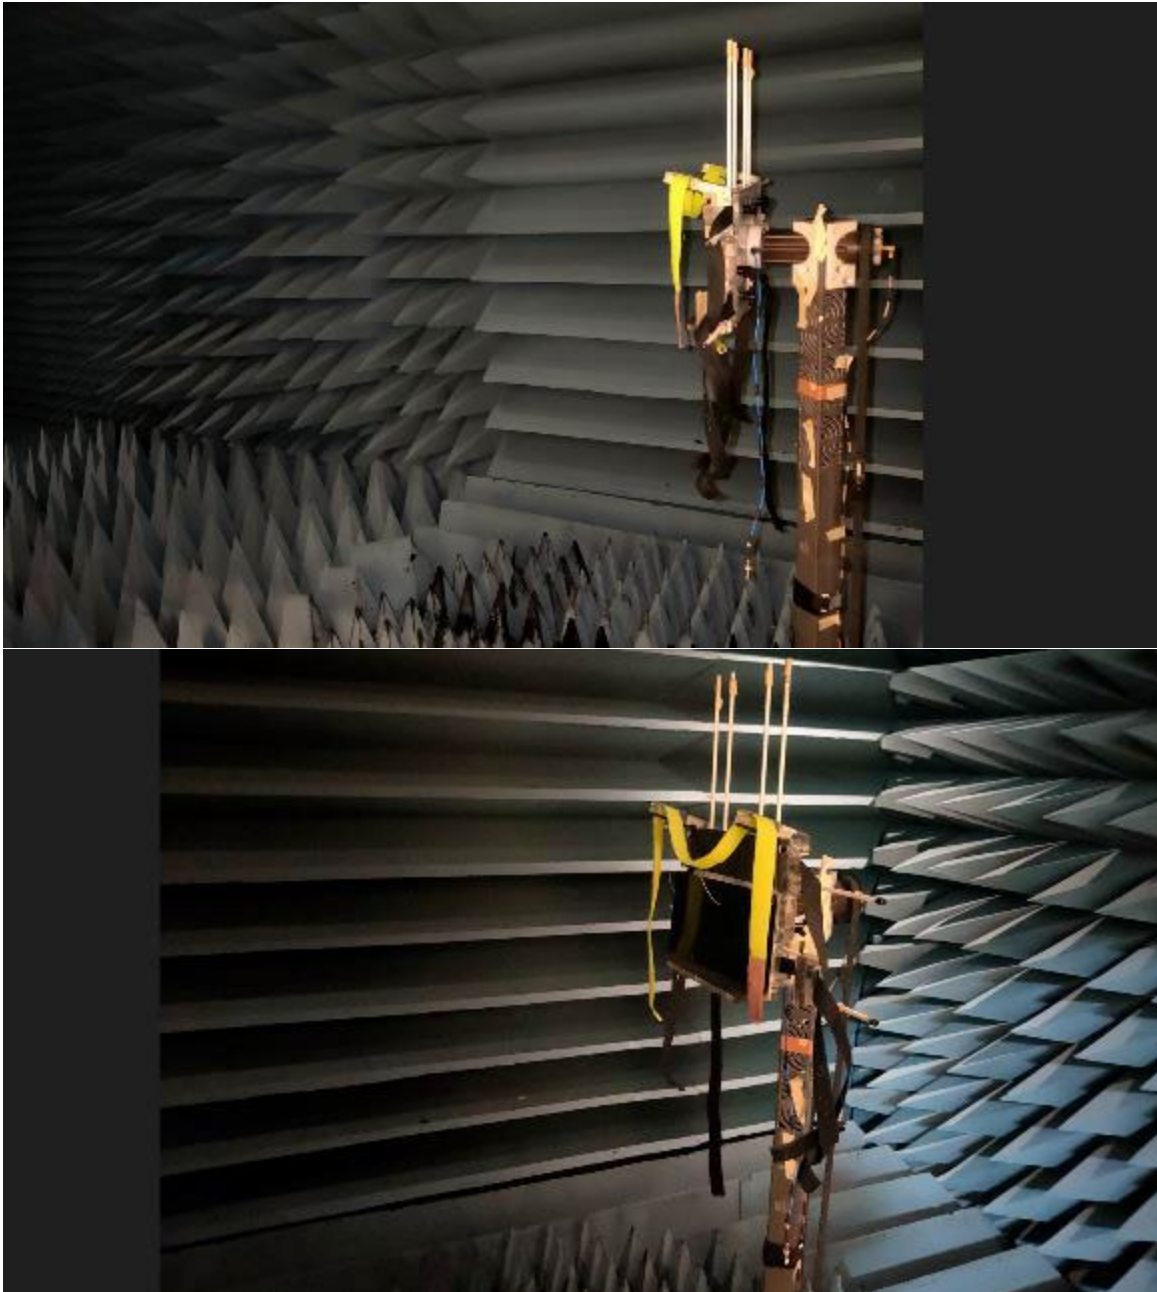

Antenna Information

Section 1. Antenna Assembly Specifications

1A Antenna Part Number	1B Manufacturer	1C Antenna Type	1D Cable Assembly Part Number and Information	Freq Range MHz	1E * Peak Gain W/ Cable loss (dBi)	1F Peak Gain w/o Cable Loss (dBi)	1G Max VSWR	1H Cable Loss (dB)
260-25094	Hong-Bo	PIFA	50 ohm Coaxial length: 300mm diameter: 1.13LLS Connector type: MHF4L MHF-B13-N-01	2400-2483.5	3.53	4.27	2.5	0.74
				5150-5250	3.06	4.22	2.5	1.16
				5250-5350	3.07	4.25	2.5	1.18
				5470-5725	4.81	6.07	2.5	1.26
				5725-5850	4.2	5.48	2.5	1.28

- 3D Antenna Peak Gain required being test in system basis.


Frequency	Peak Gain	Frequency	Peak Gain
MHz	(dBi)	MHz	(dBi)
2412	2.55	5320	3.03
2422	2.72	5350	3.07
2437	3.01	5470	4.81
2442	3.17	5500	4.53
2452	3.32	5725	4.09
2484	3.53	5785	4.2
5150	2.32	5805	4.15
5180	2.51	5850	4.07
5250	3.06		

Section 2. Radiation characteristics of antenna loaded in Host Platform

Main Antenna


Max Antenna 3D Radiation Pattern 2400 – 2484 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	3.53

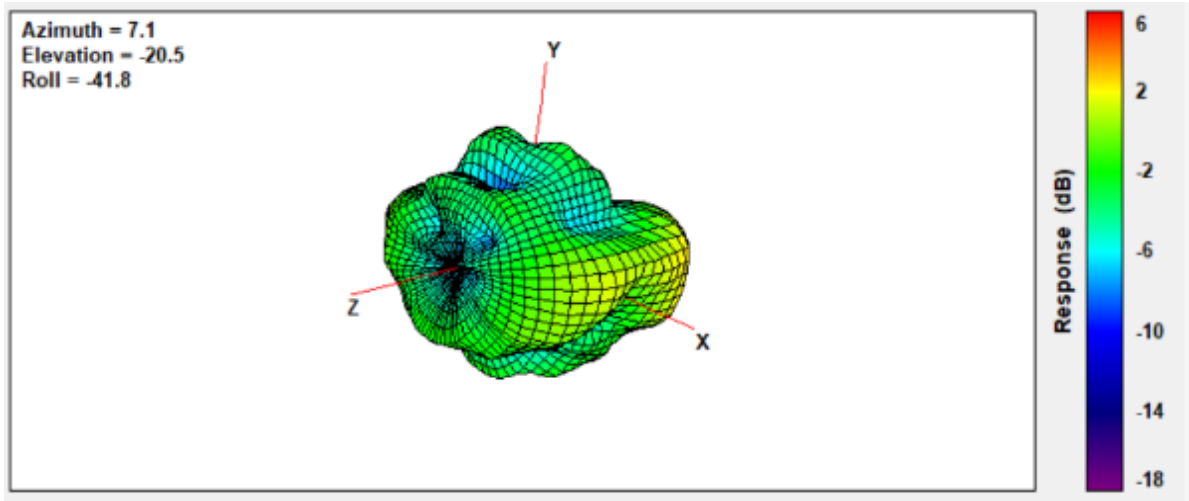


Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	3.06

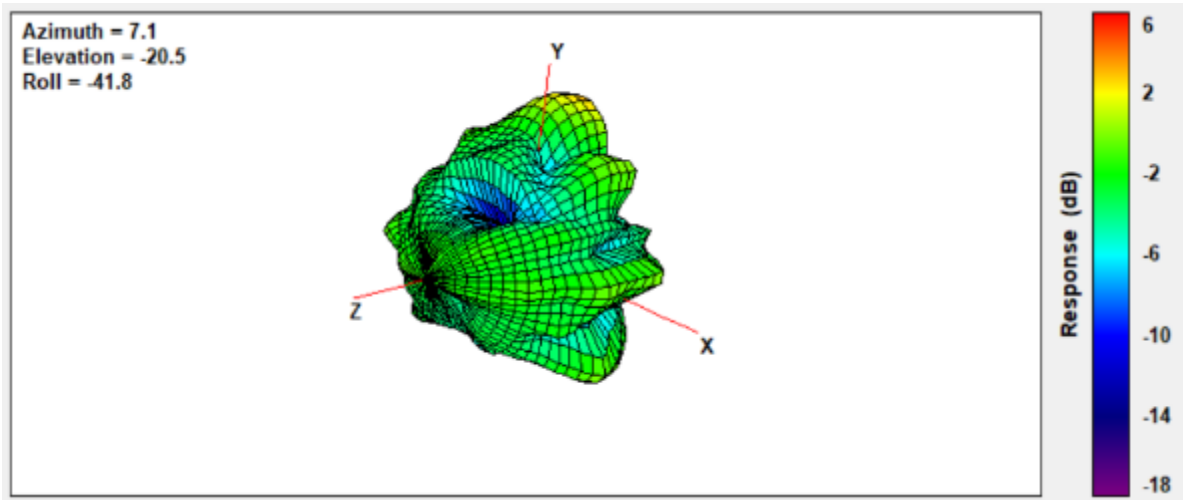


Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	3.07

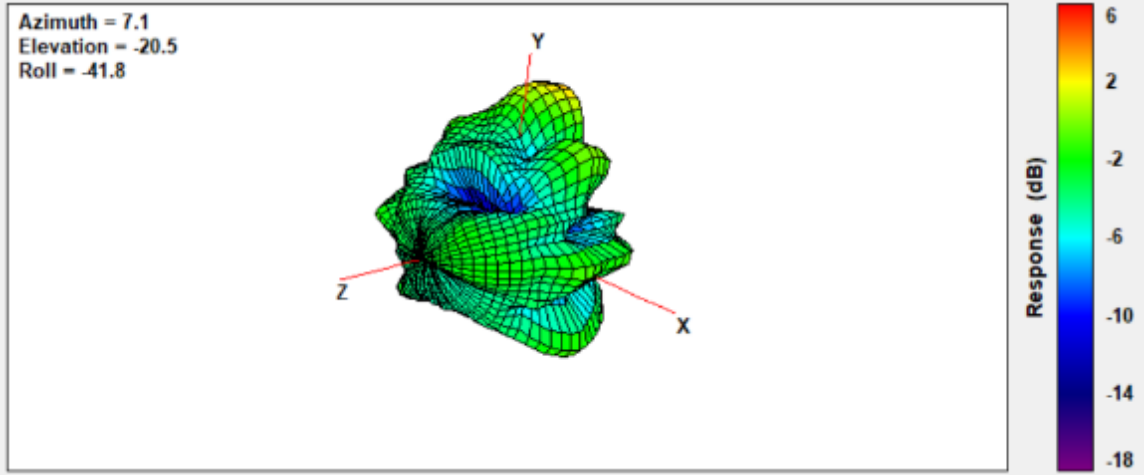

Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	4.81

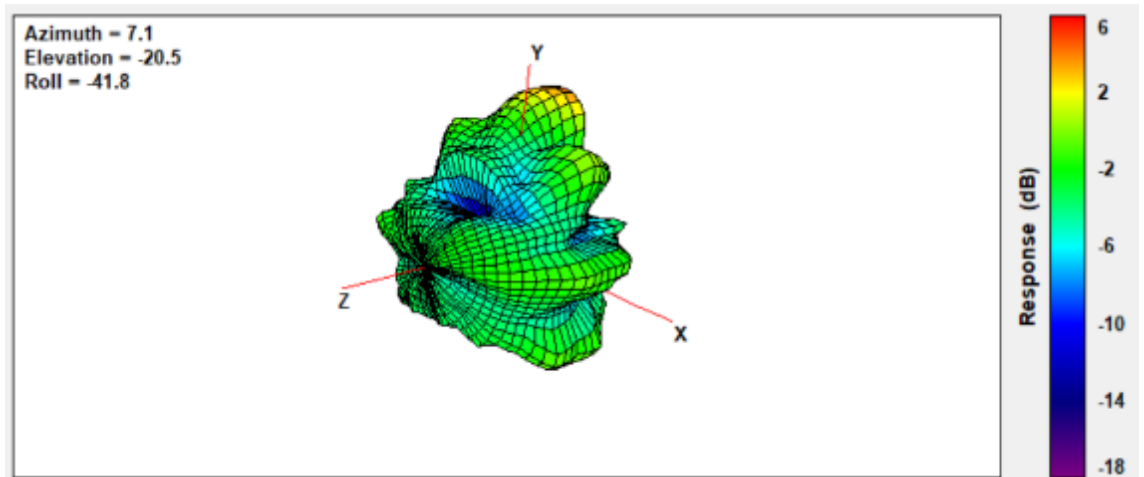

Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	4.2

