



FCC RADIO TEST REPORT

FCC ID : J9CQCARD7280N2
Equipment : QCARD7280
Brand Name : Qualcomm
Model Name : QCARD7280N2
Applicant : Qualcomm Technologies, Inc.
5775 Morehouse Drive, San Diego,
California 92121, United State
Manufacturer : Qualcomm Semiconductor Limited
No. 16-1 Zhanye 2nd Rd. East District
Hsinchu City, 300091 (Taiwan)
Standard : FCC Part 15 Subpart E §15.407

The product was received on Feb. 16, 2022 and testing was performed from Mar. 17, 2022 to Aug. 15, 2022. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report..... 3

Summary of Test Result..... 4

1 General Description 5

 1.1 Product Feature of Equipment Under Test..... 5

 1.2 Modification of EUT 5

 1.3 Testing Location 6

 1.4 Applicable Standards..... 6

2 Test Configuration of Equipment Under Test 7

 2.1 Carrier Frequency and Channel 7

 2.2 Test Mode 10

 2.3 Connection Diagram of Test System..... 12

 2.4 Support Unit used in test configuration and system 12

 2.5 EUT Operation Test Setup 12

 2.6 Measurement Results Explanation Example..... 13

3 Test Result 14

 3.1 26dB & 99% Occupied Bandwidth Measurement 14

 3.2 Maximum conducted Output Power and Fundamental Maximum EIRP Measurement 21

 3.3 Fundamental Power Spectral Density Measurement 23

 3.4 In-Band Emissions (Channel Mask) 35

 3.5 Contention Based Protocol 161

 3.6 Unwanted Emissions Measurement 184

 3.7 Antenna Requirements..... 191

4 List of Measuring Equipment..... 193

5 Uncertainty of Evaluation 195

Appendix A. Conducted Test Results

Appendix B. Conducted Spurious Emission

Appendix C. Conducted Spurious Emission Plots

Appendix D. Cabinet Radiated Spurious Emission

Appendix E. Cabinet Radiated Spurious Emission Plots

Appendix F. Radiated Spurious Emission

Appendix G. Radiated Spurious Emission Plots

Appendix H. Duty Cycle Plots

Appendix I. Setup Photographs



History of this test report

Report No.	Version	Description	Issue Date
FR1N1011F	01	Initial issue of report	Aug. 16, 2022
FR1N1011F	02	<ol style="list-style-type: none">1. Add standard for Standard Client in Summary of Test Result2. Add description of test mode in section 2.2.3. Revise brand name, antenna Information and appendix C2, C4	Sep. 12, 2022



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.403(i) 15.407(a)(10)	26dB Emission Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.407(a)(8) 15.407(a)(7)	Maximum Conducted Output Power	Reporting only	-
3.2	15.407(a)(8) 15.407(a)(7)	Fundamental Maximum EIRP	Pass	-
3.3	15.407(a)(8) 15.407(a)(7)	Fundamental Power Spectral Density	Pass	-
3.4	15.407(b)(6)	In-Band Emissions (Channel Mask)	Pass	-
3.5	15.407(d)(6)	Contention Based Protocol	Pass	-
3.6	15.407(b)	Unwanted Emissions	Pass	0.55 dB under the limit at 8226.000 MHz
-	15.207	AC Conducted Emission	Not Required	-
3.7	15.203 15.407(a)	Antenna Requirement	Pass	-

Note: Not required means after assessing, test items are not necessary to carry out.

Declaration of Conformity:
1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers. It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
2. The measurement uncertainty please refer to this report "Uncertainty of Evaluation".
Comments and Explanations:
The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Avis Chuang

Report Producer: Ruby Zou



1 General Description

1.1 Product Feature of Equipment Under Test

WCDMA/LTE/5G NR, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ac/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, and Wi-Fi 6GHz 802.11a/n/ac/ax.

Antenna Information								
Antenna Set	RF Chain No.	Brand	Model	Antenna Net Gain (dBi)	Frequency Range (MHz)	Ant. Type	Connector Type	Cable Length (mm)
A	Chain0/1	HONG BO	260-25094	3.53	2.4~2.4835 GHz	PIFA	i-pex (MHF 4L)	300mm
				3.06	5.15~5.25 GHz			
				3.07	5.25~5.35 GHz			
				4.81	5.47~5.725 GHz			
				4.2	5.725~5.850 GHz			
B	Chain0/1	HONG BO	260-25083	5.09	5.850~5.895 GHz	PIFA	i-pex (MHF 4L)	300mm
				5.14	5.925~6.425 GHz			
				5.09	6.425~6.525 GHz			
				5.16	6.525~6.875 GHz			
				5.12	6.875~7.125 GHz			
C	Chain0/1	HONG BO	260-25084	3.22	2.4~2.4835 GHz	Monopole	i-pex (MHF 4L)	200mm
				3.35	5.15~5.25 GHz			
				3.42	5.25~5.35 GHz			
				4.77	5.47~5.725 GHz			
				4.72	5.725~5.850 GHz			
				4.71	5.850~5.895 GHz			
				4.75	5.925~6.425 GHz			
				4.29	6.425~6.525 GHz			
				4.81	6.525~6.875 GHz			
				4.74	6.875~7.125 GHz			

Remark:

1. Ant. 5 means Chain 0 and Ant. 4 means Chain 1.
2. The maximum gain was chosen for test.
3. The EUT's information above is declared by manufacturer. Please refer to Comments and Explanations in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.



1.3 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. DF02-HY (TAF Code: 1190)
Remark	The Contention Based Protocol test item subcontracted to Sporton International Inc. EMC & Wireless Communications Laboratory

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. TH05-HY, 03CH15-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 987594 D02 U-NII 6 GHz EMC Measurement v01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

2.1 Carrier Frequency and Channel

BW 20M	Channel	2	1	5	9	13	17	21	25	29	
	Freq. (MHz)	5935	5955	5975	5995	6015	6035	6055	6075	6095	
BW 40M	Channel	3			11		19		27		
	Freq. (MHz)	5965			6005		6045		6085		
BW 80M	Channel	7					23				
	Freq. (MHz)	5985					6065				
BW 160M	Channel	15									
	Freq. (MHz)	6025									

BW 20M	Channel	33	37	41	45	49	53	57	61		
	Freq. (MHz)	6115	6135	6155	6175	6195	6215	6235	6255		
BW 40M	Channel	35			43		51		59		
	Freq. (MHz)	6125			6165		6205		6245		
BW 80M	Channel	39					55				
	Freq. (MHz)	6145					6225				
BW 160M	Channel	47									
	Freq. (MHz)	6185									



BW 20M	Channel	65	69	73	77	81	85	89	93
	Freq. (MHz)	6275	6295	6315	6335	6355	6375	6395	6415
BW 40M	Channel	67		75		83		91	
	Freq. (MHz)	6285		6325		6365		6405	
BW 80M	Channel	71				87			
	Freq. (MHz)	6305				6385			
BW 160M	Channel	79							
	Freq. (MHz)	6345							

BW 20M	Channel	97	101	105	109	113	117	121	125
	Freq. (MHz)	6435	6455	6475	6495	6515	6535	6555	6575
BW 40M	Channel	99		107		115		123	
	Freq. (MHz)	6445		6485		6525		6565	
BW 80M	Channel	103				119			
	Freq. (MHz)	6465				6545			
BW 160M	Channel	111							
	Freq. (MHz)	6505							

BW 20M	Channel	129	133	137	141	145	149	153	157
	Freq. (MHz)	6595	6615	6635	6655	6675	6695	6715	6735
BW 40M	Channel	131		139		147		155	
	Freq. (MHz)	6605		6645		6685		6725	
BW 80M	Channel	135				151			
	Freq. (MHz)	6625				6705			
BW 160M	Channel	143							
	Freq. (MHz)	6665							

BW 20M	Channel	161	165	169	173	177	181	185	189
	Freq. (MHz)	6755	6775	6795	6815	6835	6855	6875	6895
BW 40M	Channel	163		171		179		187	
	Freq. (MHz)	6765		6805		6845		6885	
BW 80M	Channel	167				183			
	Freq. (MHz)	6785				6865			
BW 160M	Channel	175							
	Freq. (MHz)	6825							



BW 20M	Channel	193	197	201	205	209	213	217	221
	Freq. (MHz)	6915	6935	6955	6975	6995	7015	7035	7055
BW 40M	Channel	195		203		211		219	
	Freq. (MHz)	6925		6965		7005		7045	
BW 80M	Channel	199				215			
	Freq. (MHz)	6945				7025			
BW 160M	Channel	207							
	Freq. (MHz)	6985							

BW 20M	Channel	225		229		233	
	Freq. (MHz)	7075		7095		7115	
BW 40M	Channel	227					
	Freq. (MHz)	7085					



2.2 Test Mode

The 242-tone RU is covered by 20MHz channel, 484-tone RU is covered by 40MHz channel and 996-tone RU is covered by 80MHz channel.

The 802.11n/ac mode has no higher power and PSD than 802.11ax mode, thus the 802.11ax mode is chosen as main test configuration, and the 802.11n/ac mode is verified the power.

The final test modes include the worst data rates for each modulation shown in the table below.

<Indoor Client>

Modulation	Data Rate
802.11a	6Mbps
802.11n HT20 (Covered by HE20)	MCS0
802.11n HT40 (Covered by HE40)	MCS0
802.11ac VHT20 (Covered by HE20)	MCS0
802.11ac VHT40 (Covered by HE40)	MCS0
802.11ac VHT80 (Covered by HE80)	MCS0
802.11ac VHT160 (Covered by HE160)	MCS0
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0
802.11ax HE160	MCS0

<Standard Client>

Modulation	Data Rate
802.11a	6Mbps
802.11n HT20 (Covered by HE20)	MCS0
802.11n HT40 (Covered by HE40)	MCS0
802.11ac VHT20 (Covered by HE20)	MCS0
802.11ac VHT40 (Covered by HE40)	MCS0
802.11ac VHT80 (Covered by HE80)	MCS0
802.11ac VHT160 (Covered by HE160)	MCS0
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0
802.11ax HE160	MCS0

Remark: The conducted power level of each chain in MIMO mode is equal or higher than SISO mode.



Ch. #		UNII-5 (5925-6425 MHz)	UNII-6 (6425-6525 MHz)	UNII-7 (6525-6875 MHz)	UNII-8 (6875-7125 MHz)
		802.11a	802.11a	802.11a	802.11a
L	Low	002, 001	097	117	-
M	Middle	045	105	149	209
H	High	093	113	181	229, 233
Straddle		-	-	185	-

Ch. #		UNII-5 (5925-6425 MHz)	UNII-6 (6425-6525 MHz)	UNII-7 (6525-6875 MHz)	UNII-8 (6875-7125 MHz)
		802.11ax HE20	802.11ax HE20	802.11ax HE20	802.11ax HE20
L	Low	002, 001	097	117	-
M	Middle	045	-	-	-
H	High	093	-	-	229, 233


Ch. #		UNII-5 (5925-6425 MHz)	UNII-6 (6425-6525 MHz)	UNII-7 (6525-6875 MHz)	UNII-8 (6875-7125 MHz)
		802.11ax HE40	802.11ax HE40	802.11ax HE40	802.11ax HE40
L	Low	003	099	123	-
M	Middle	-	-	-	-
H	High	-	-	-	227

Ch. #		UNII-5 (5925-6425 MHz)	UNII-6 (6425-6525 MHz)	UNII-7 (6525-6875 MHz)	UNII-8 (6875-7125 MHz)
		802.11ax HE80	802.11ax HE80	802.11ax HE80	802.11ax HE80
L	Low	007	103	135	-
M	Middle	-		-	-
H	High	-		-	215

Ch. #		UNII-5 (5925-6425 MHz)	UNII-6 (6425-6525 MHz)	UNII-7 (6525-6875 MHz)	UNII-8 (6875-7125 MHz)
		802.11ax HE160	802.11ax HE160	802.11ax HE160	802.11ax HE160
L	Low	015	-	143	207
M	Middle	047	-		
H	High	079	-		
Straddle		-	111	175	-

Remark: For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.

2.3 Connection Diagram of Test System

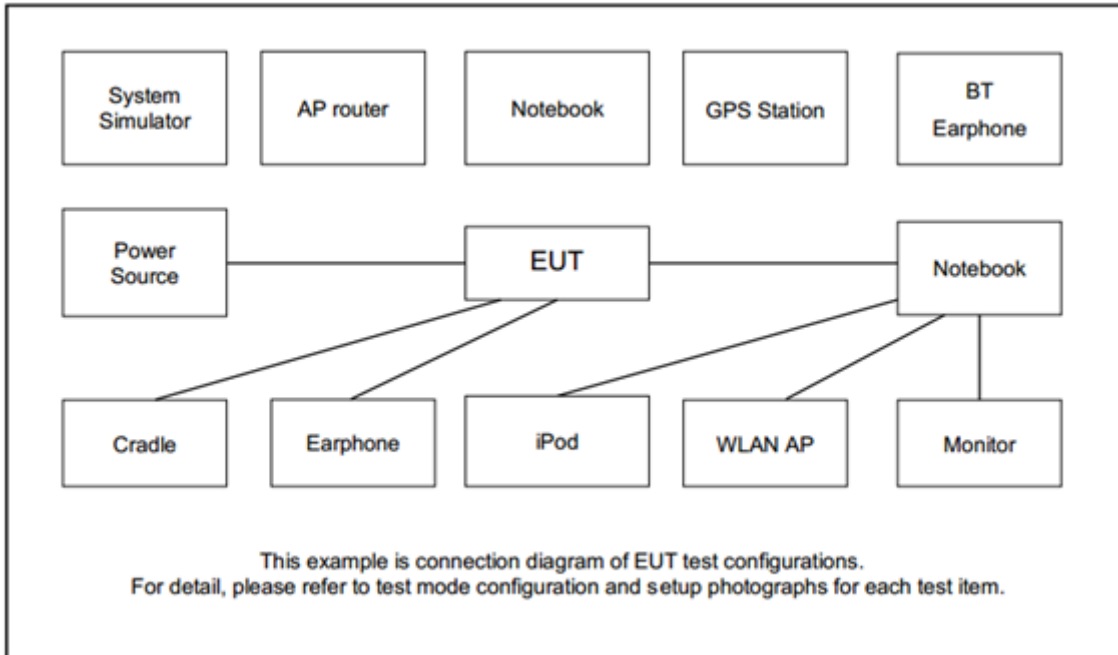

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	DELL	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
2.	Power Supply	GW Instek	GET874629	N/A	N/A	Unshielded, 1.8 m
3.	Fixture	Qualcomm	20-33568-H1	N/A	N/A	N/A

2.5 EUT Operation Test Setup

The RF test items, utility “QRCT v4.0.00195.0” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 Limit of 26dB & 99% Occupied Bandwidth

<FCC 14-30 CFR 15.407>

(a)(10) The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
8. Measure and record the results in the test report.

3.1.4 Test Setup

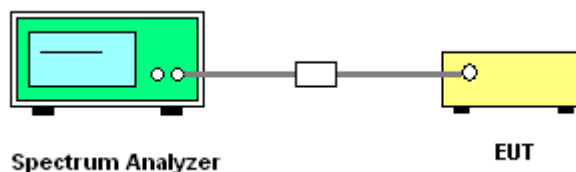


3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.




<Indoor Client>

<802.11a>

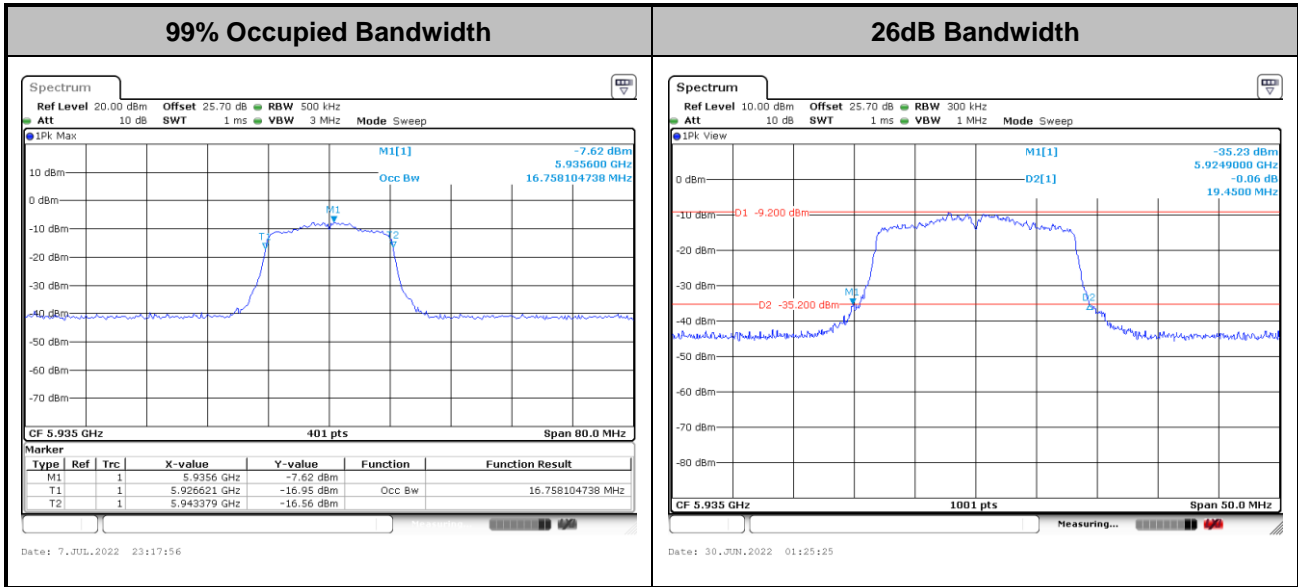

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.


<802.11ax HE20>

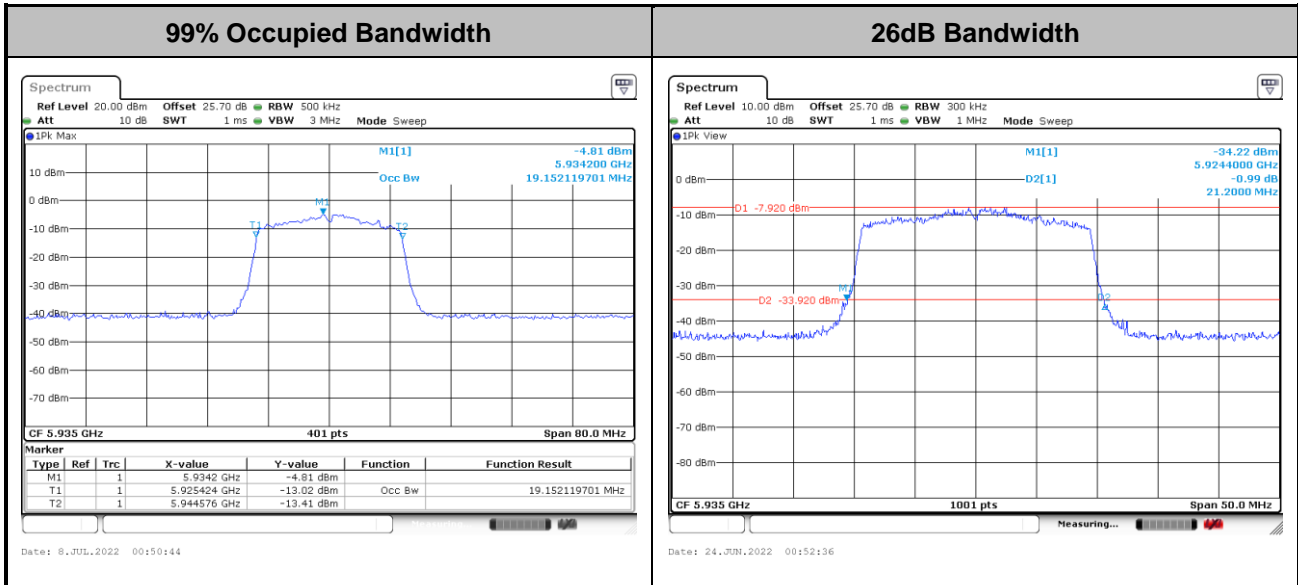

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11ax HE40>

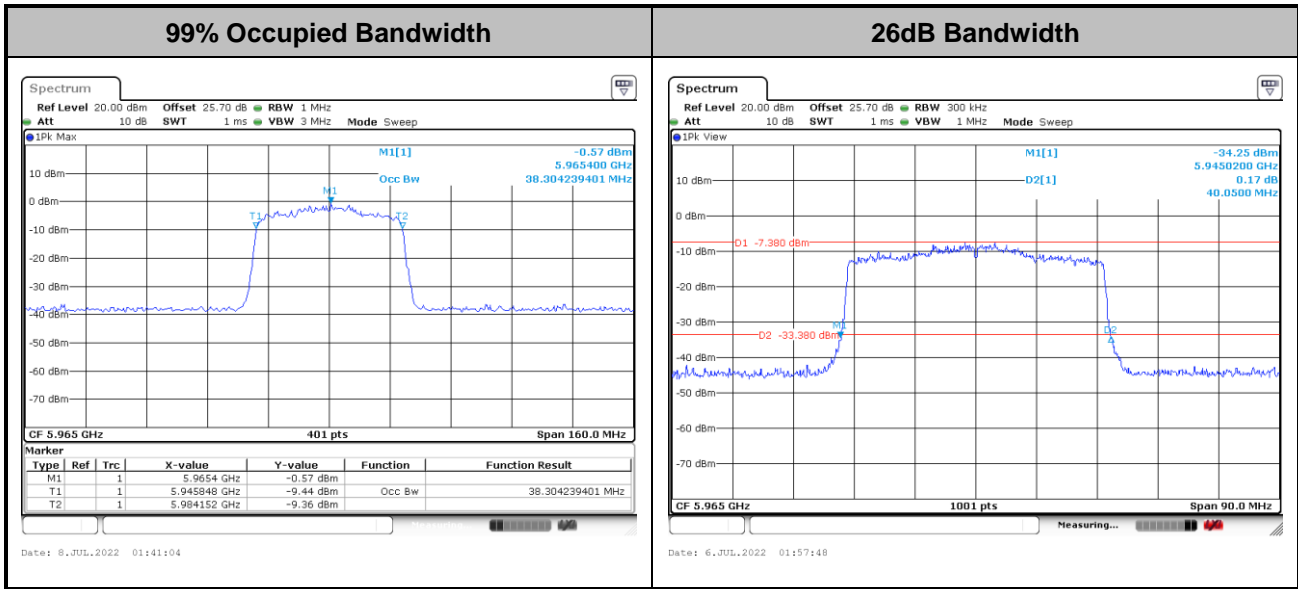

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.


<802.11ax HE80>

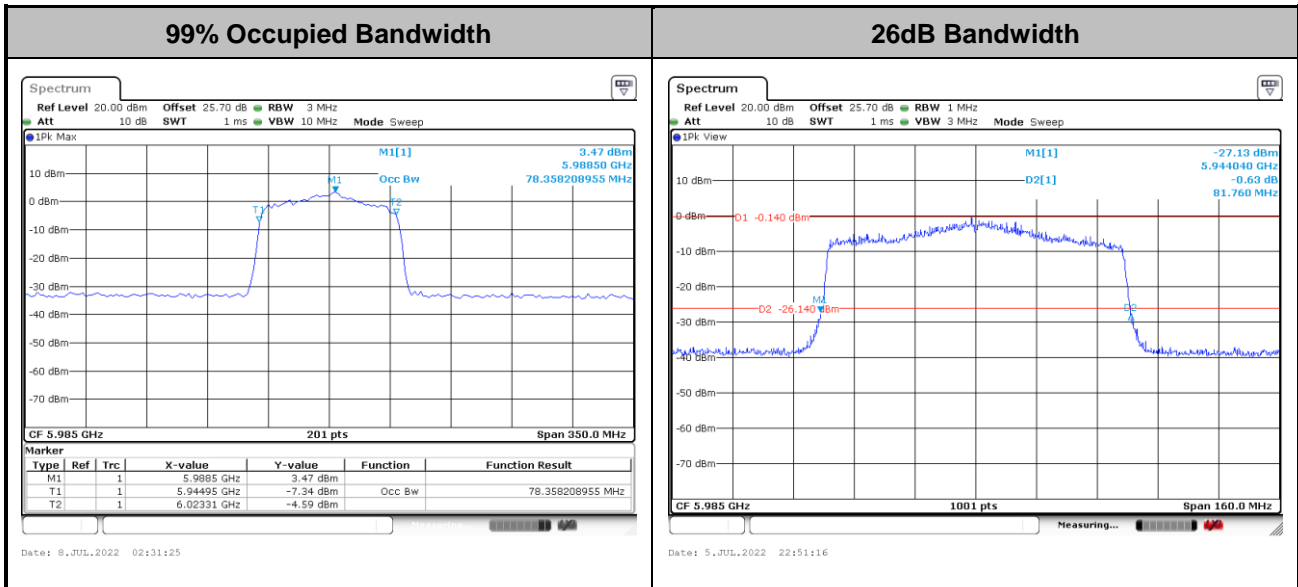

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



<802.11ax HE160>

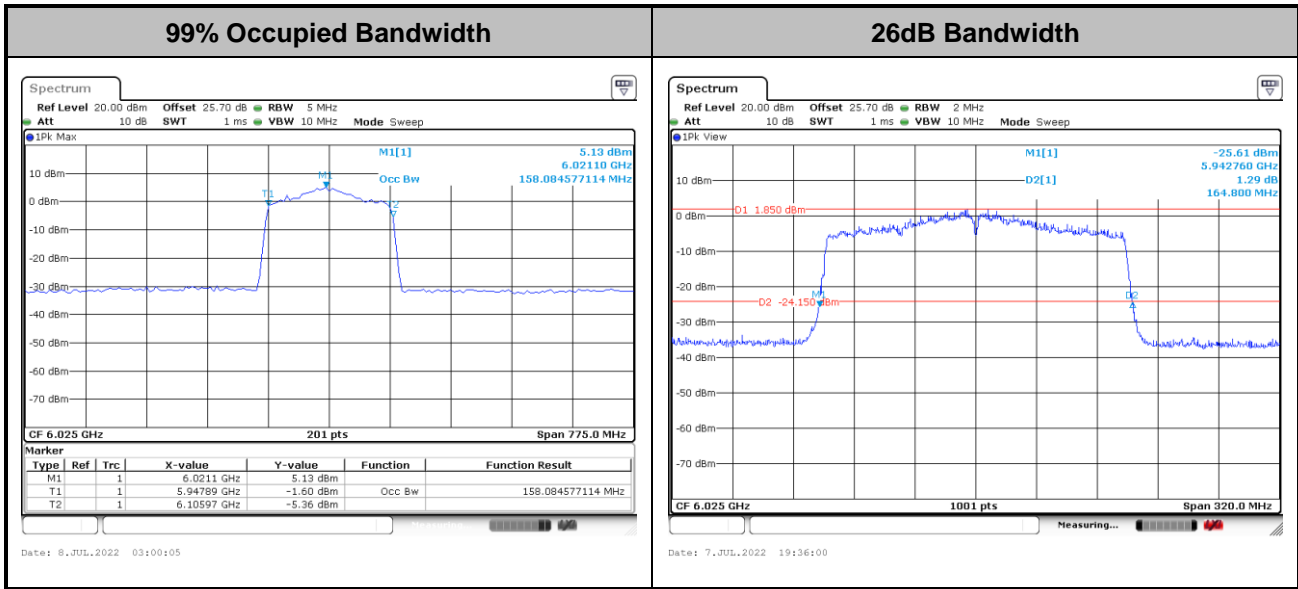


Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<Standard Client>

<802.11a>

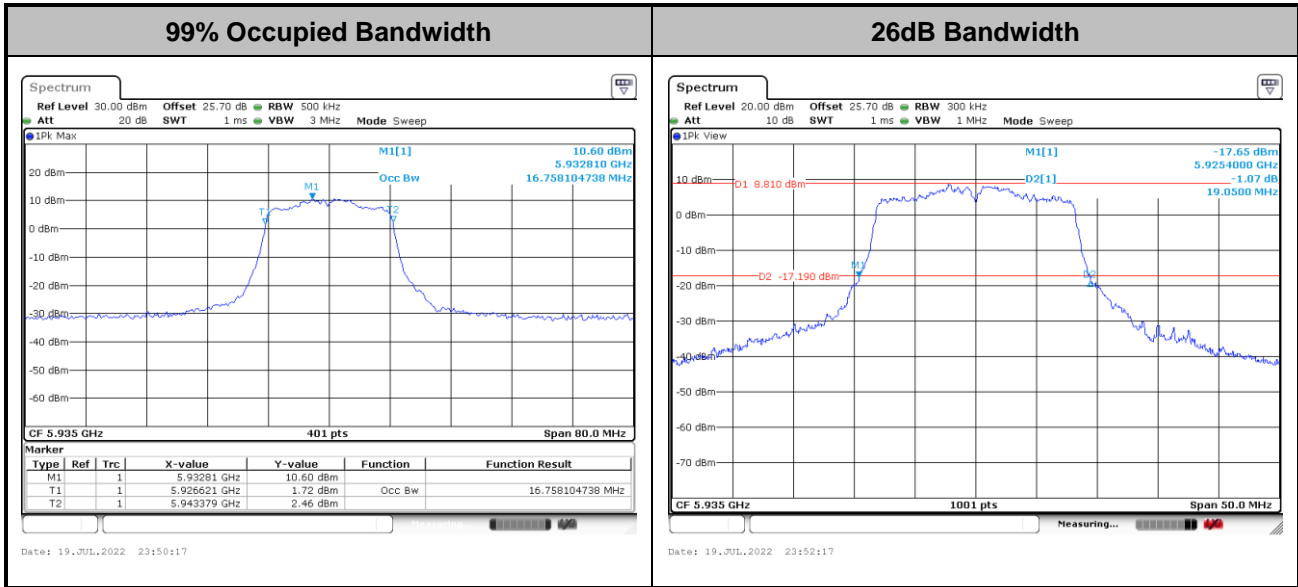

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.


<802.11ax HE20>

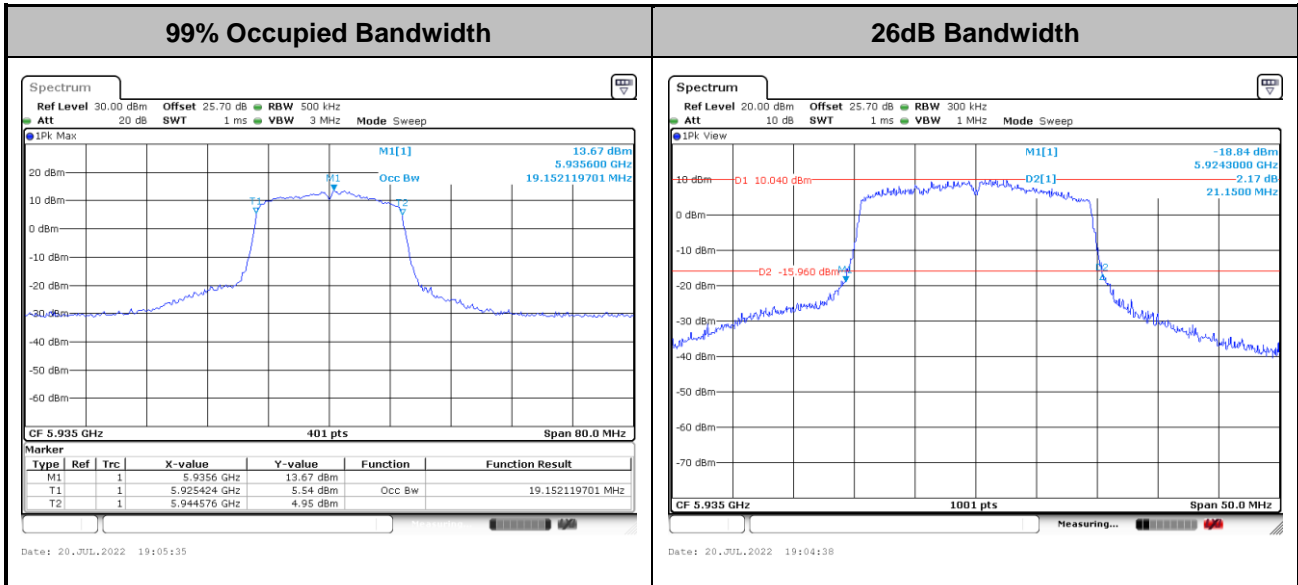

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11ax HE40>

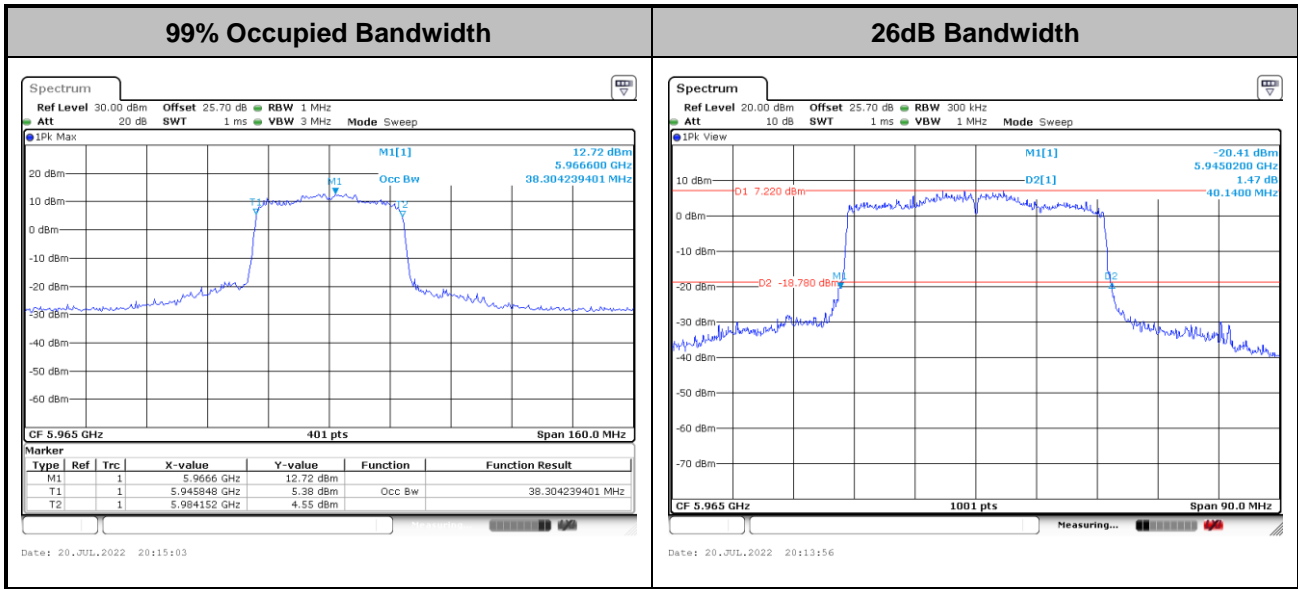

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.


<802.11ax HE80>

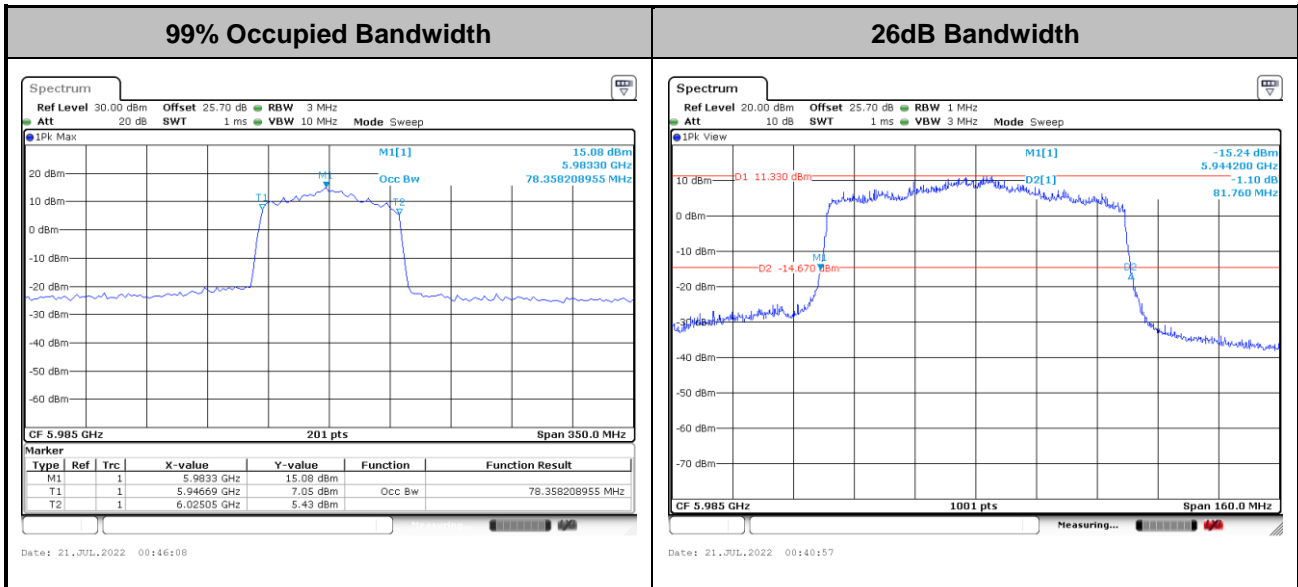

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



<802.11ax HE160>

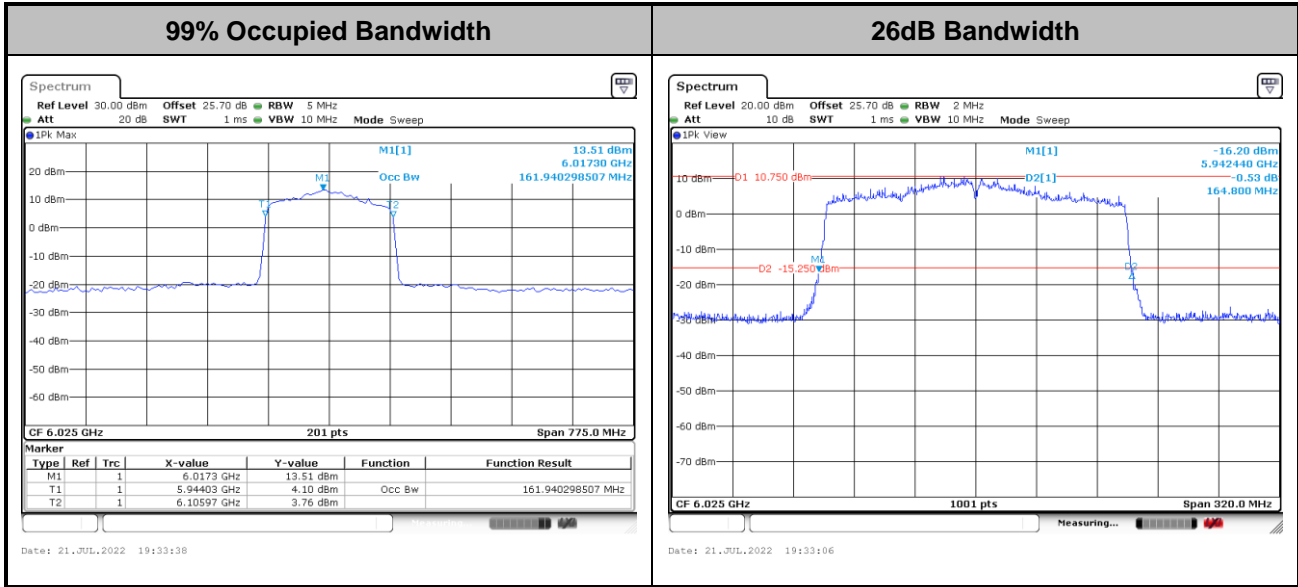

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



3.2 Maximum conducted Output Power and Fundamental Maximum EIRP Measurement

3.2.1 Limit of Fundamental Maximum EIRP

<FCC 14-30 CFR 15.407>

(a)(7) For client devices, except for fixed client devices as defined in this subpart, operating under the control of a standard power access

point in 5.925-6.425 GHz and 6.525-6.875 GHz bands, the maximum power spectral density must not exceed 17 dBm e.i.r.p. in any 1-

megahertz band, and the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm and the device must limit its

power to no more than 6 dB below its associated standard power access point's authorized transmit power.

(a)(8) For client devices operating under the control of an indoor access point in the 5.925-7.125 GHz bands, the maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm.

3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


3.2.3 Test Procedures

The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter.
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

3.2.4 Test Setup

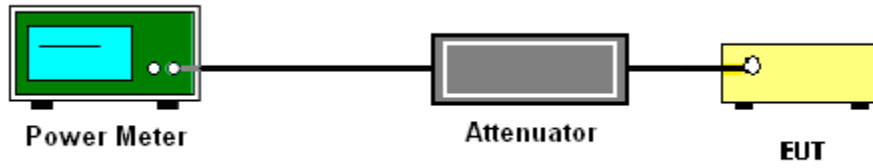

3.2.5 Test Result of Fundamental Maximum EIRP

Please refer to Appendix A.



3.3 Fundamental Power Spectral Density Measurement

3.3.1 Limit of Fundamental Power Spectral Density

<FCC 14-30 CFR 15.407>

(a)(7) For client devices, except for fixed client devices as defined in this subpart, operating under the control of a standard power access point in 5.925-6.425 GHz and 6.525-6.875 GHz bands, the maximum power spectral density must not exceed 17 dBm e.i.r.p. in any 1-megahertz band,

(a)(8) For client devices operating under the control of an indoor access point in the 5.925-7.125 GHz bands, the maximum power spectral density must not exceed -1 dBm e.i.r.p. in any 1-megahertz band.

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW \geq 3 MHz.
 - Number of points in sweep \geq 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
 3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (a): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points; the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

3.3.4 Test Setup




3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.



<Indoor Client>
<802.11a>



Power Density Plot (dBm/MHz)

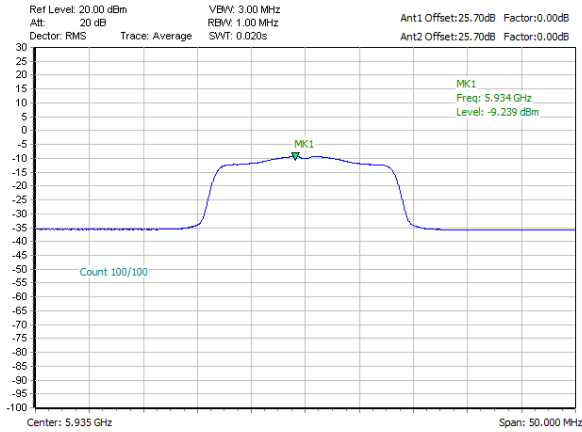

Note:


1. EIRP Power Density (dBm/MHz) = Measured value+ Duty Factor + Directional Gain
2. The test plot is showing a bin by bin combined result mathematically adds two traces.

Power Density Plot Trace 1 (Ant 5)	Power Density Plot Trace 2 (Ant 4)
------------------------------------	------------------------------------

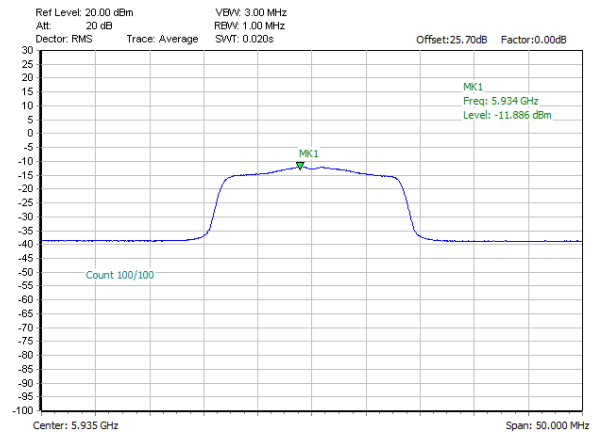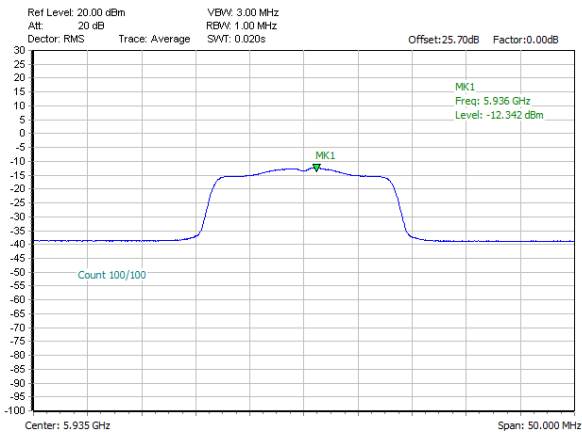




<802.11ax HE20>

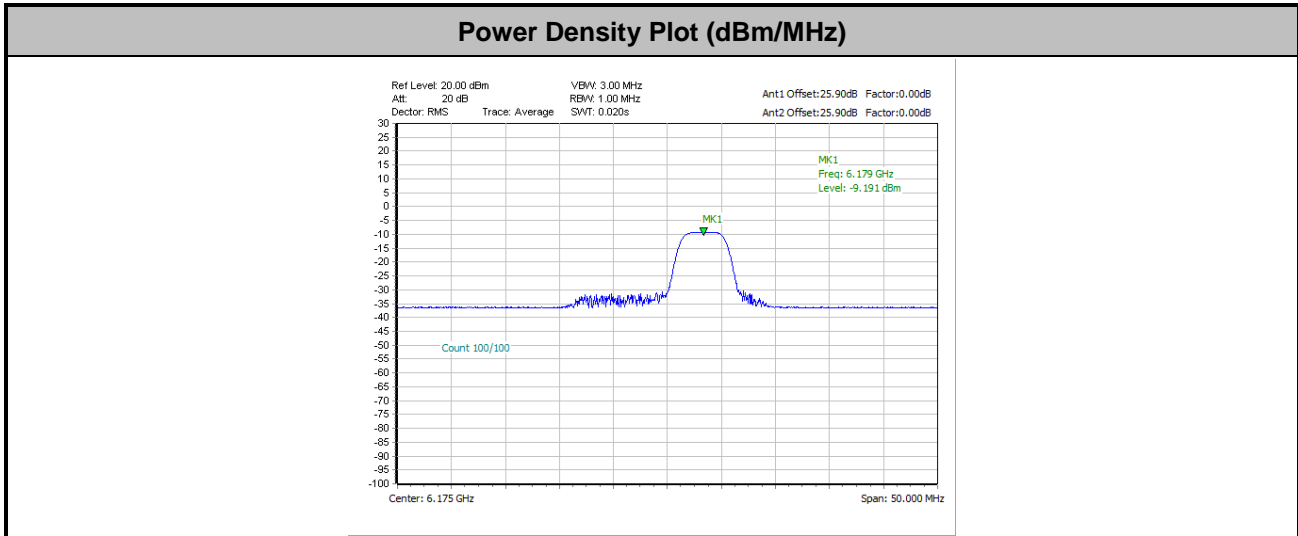


Note:

1. EIRP Power Density (dBm/MHz) = Measured value+ Duty Factor + Directional Gain
2. The test plot is showing a bin by bin combined result mathematically adds two traces.

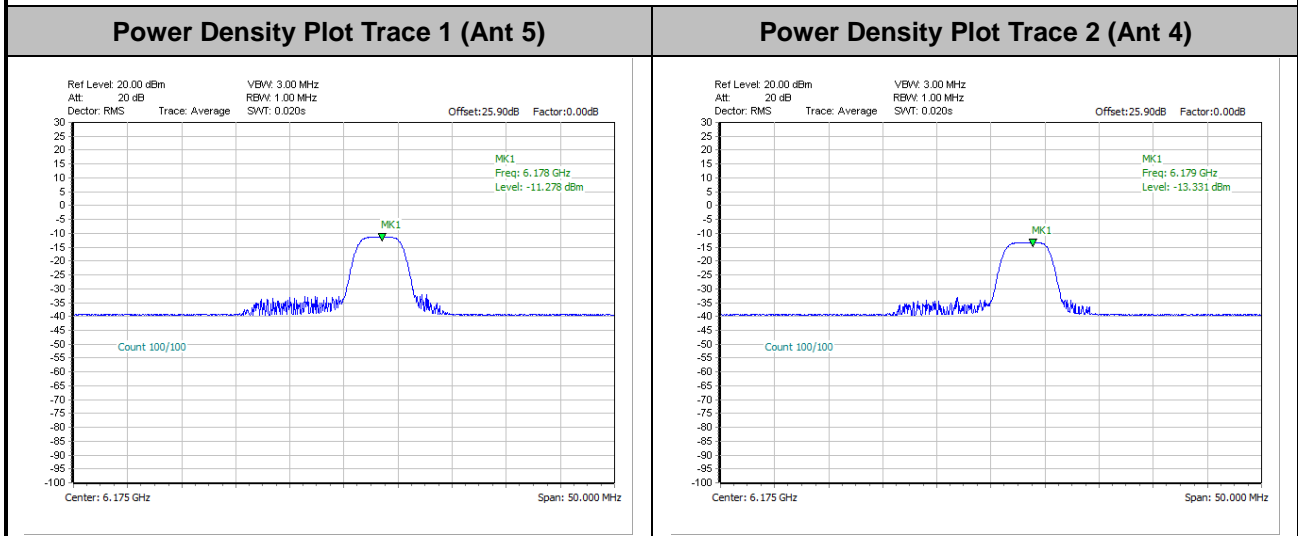




<802.11ax HE40>

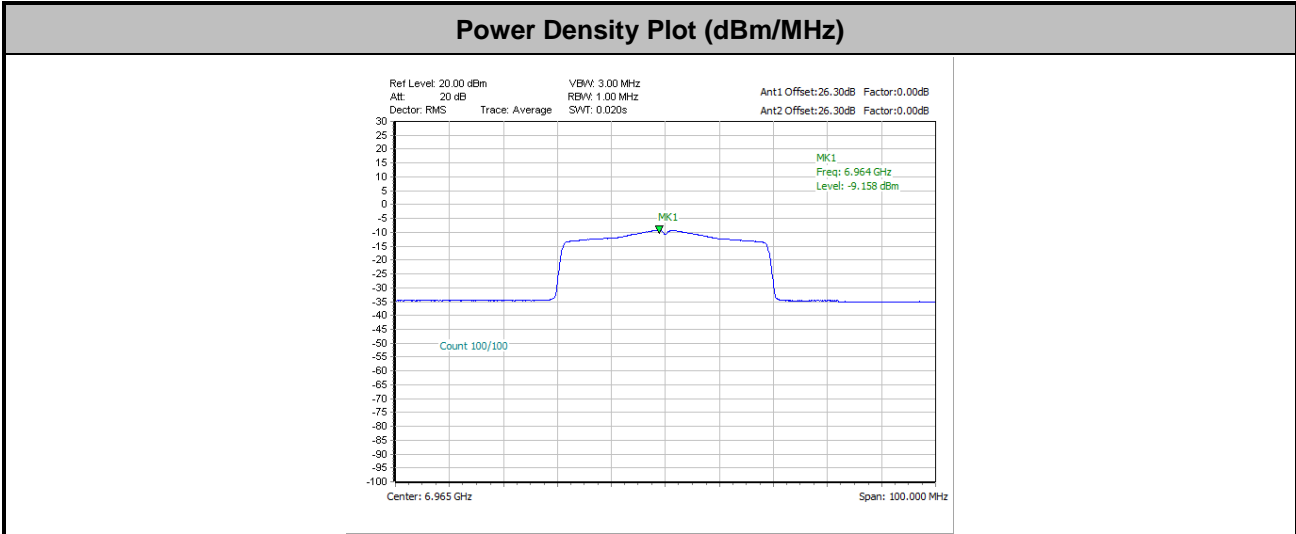


Note:

1. EIRP Power Density (dBm/MHz) = Measured value+ Duty Factor + Directional Gain
2. The test plot is showing a bin by bin combined result mathematically adds two traces.

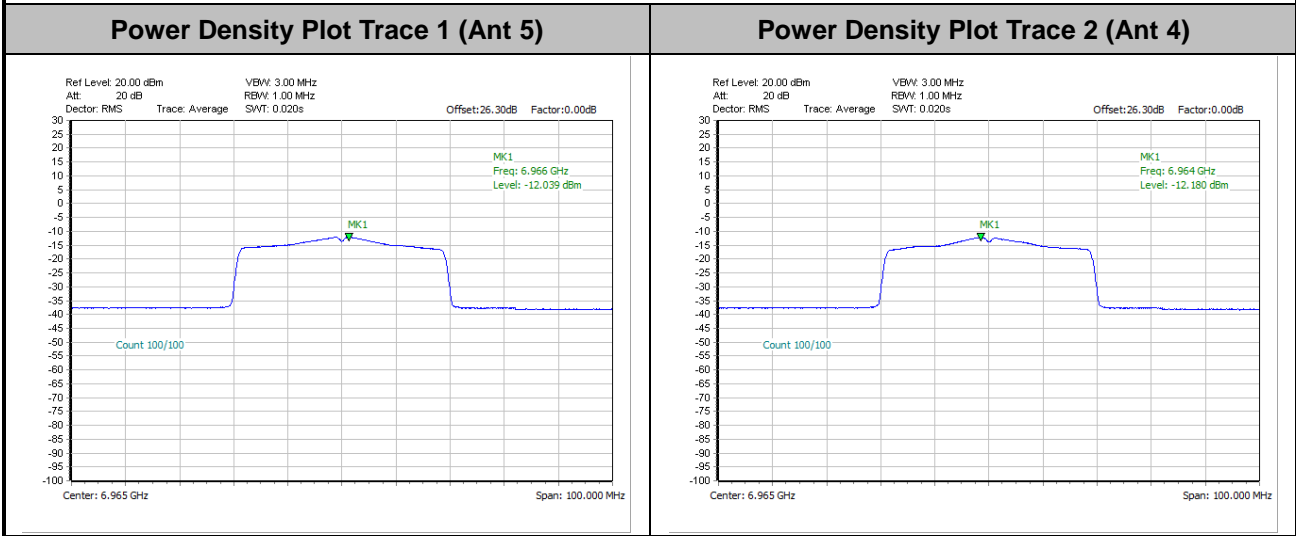




<802.11ax HE80>

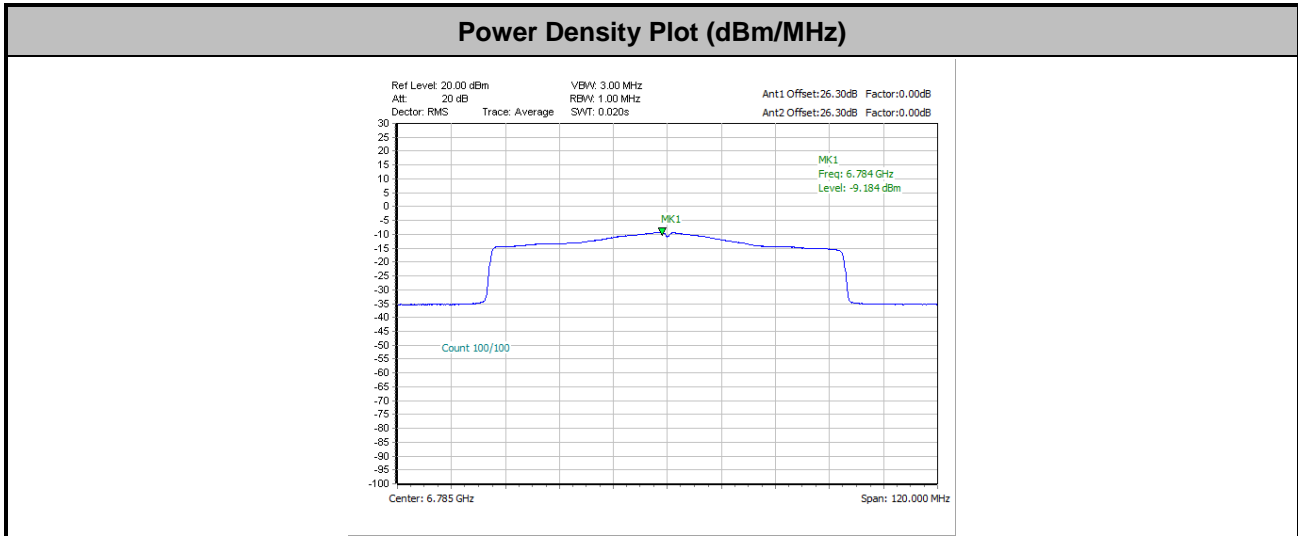


Note:

1. EIRP Power Density (dBm/MHz) = Measured value+ Duty Factor + Directional Gain
2. The test plot is showing a bin by bin combined result mathematically adds two traces.

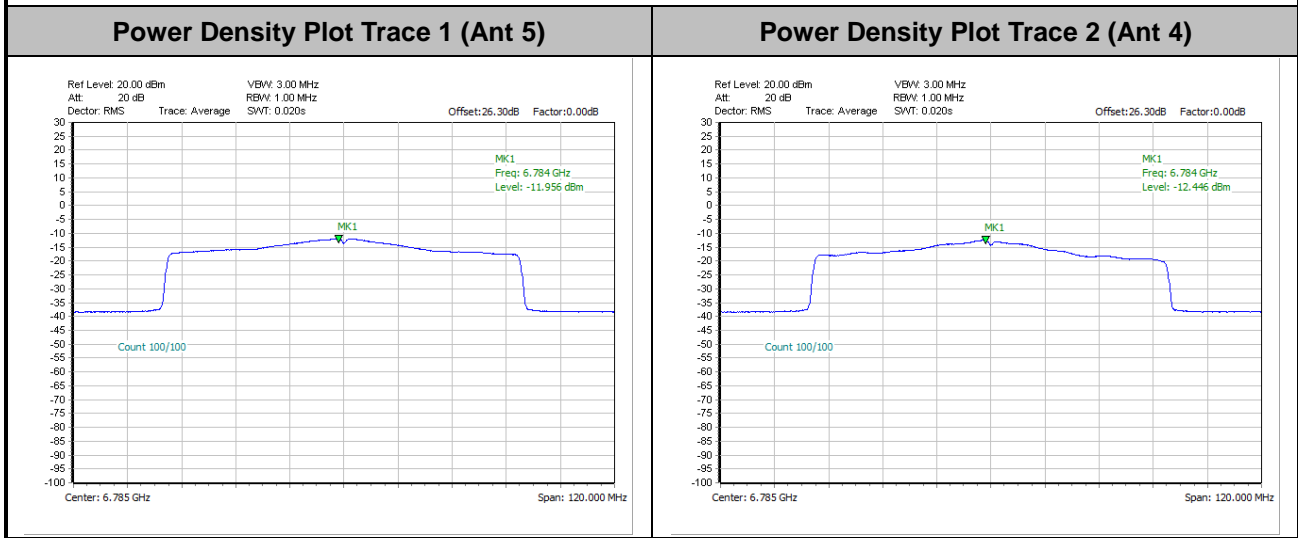




<802.11ax HE160>

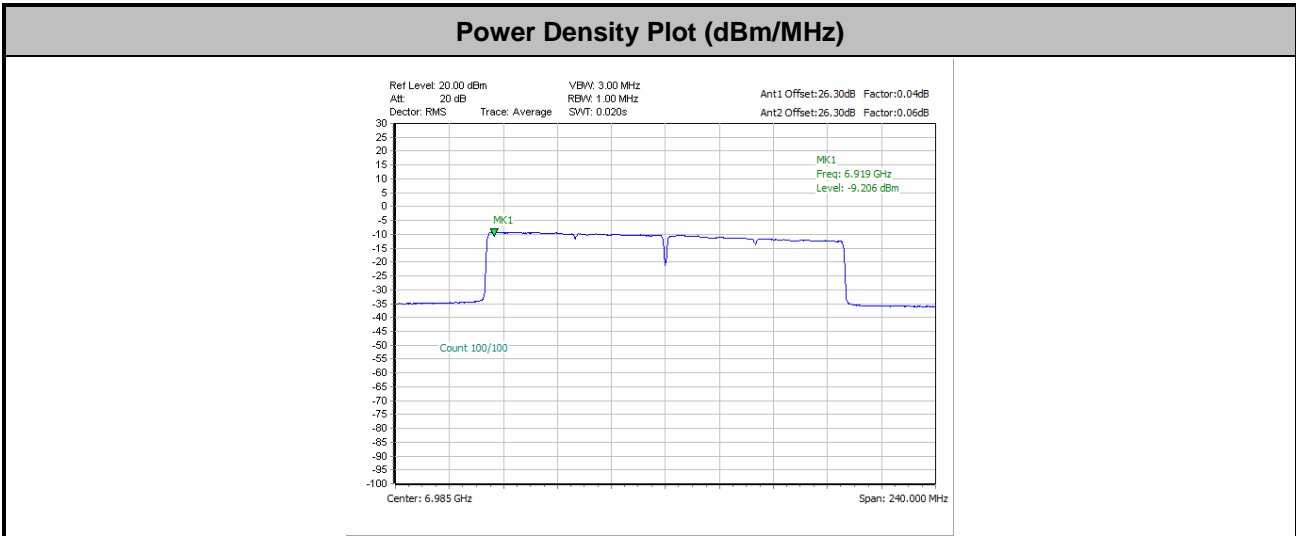

Note:


1. EIRP Power Density (dBm/MHz) = Measured value+ Duty Factor + Directional Gain
2. The test plot is showing a bin by bin combined result mathematically adds two traces.

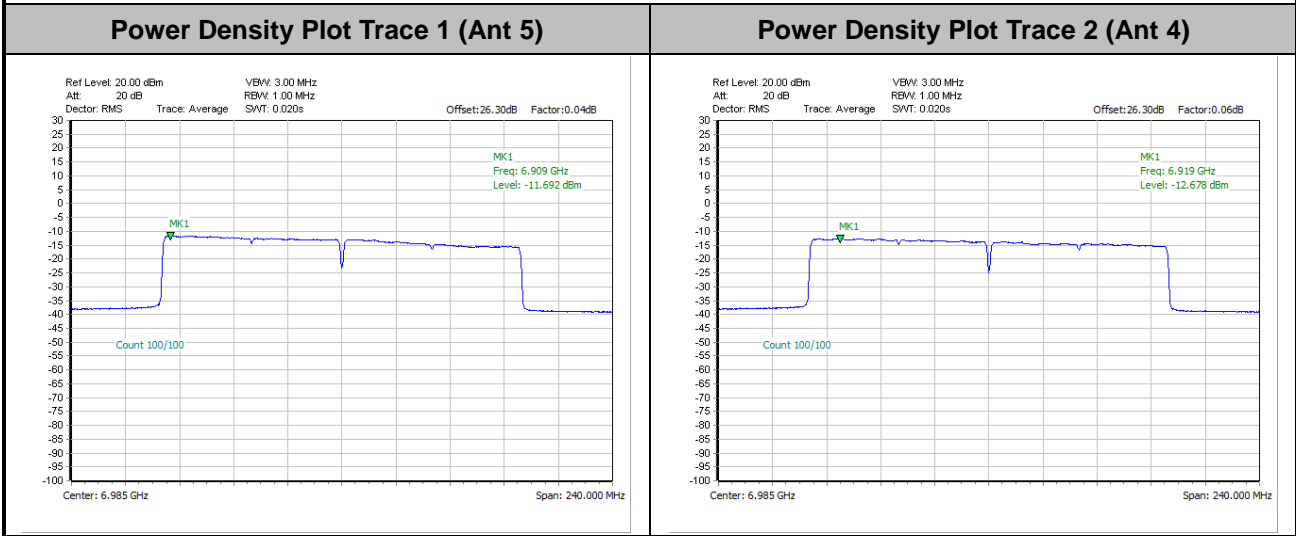



<Standard Client>
<802.11a>



Power Density Plot (dBm/MHz)

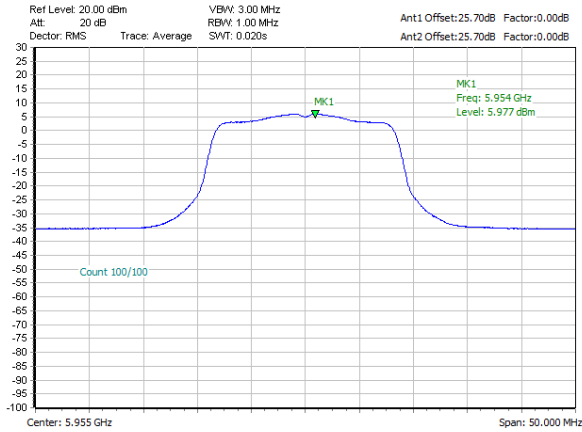

Note:


1. EIRP Power Density (dBm/MHz) = Measured value+ Duty Factor + Directional Gain
2. The test plot is showing a bin by bin combined result mathematically adds two traces.

Power Density Plot Trace 1 (Ant 5)	Power Density Plot Trace 2 (Ant 4)
------------------------------------	------------------------------------

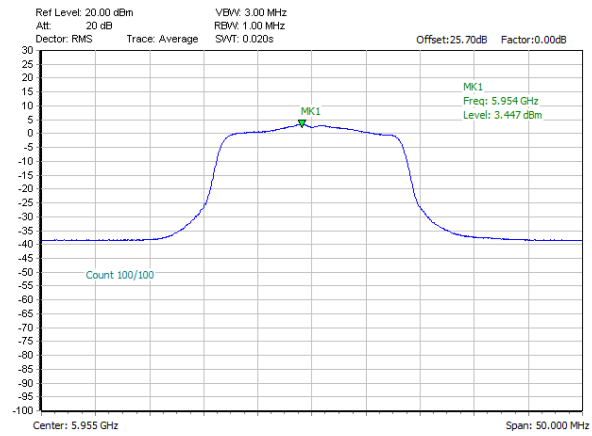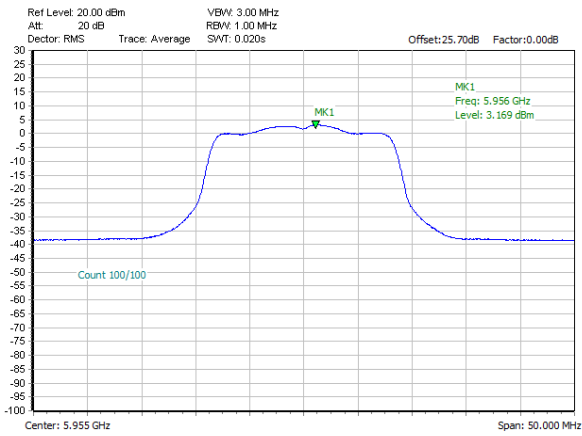




<802.11ax HE20>

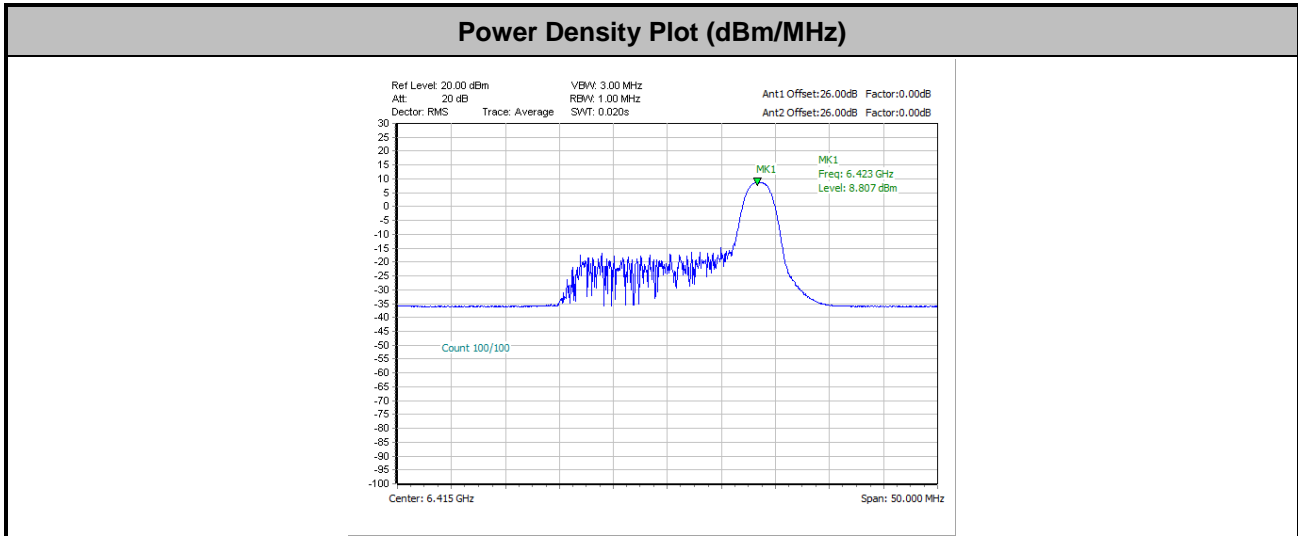


Note:

1. EIRP Power Density (dBm/MHz) = Measured value+ Duty Factor + Directional Gain
2. The test plot is showing a bin by bin combined result mathematically adds two traces.

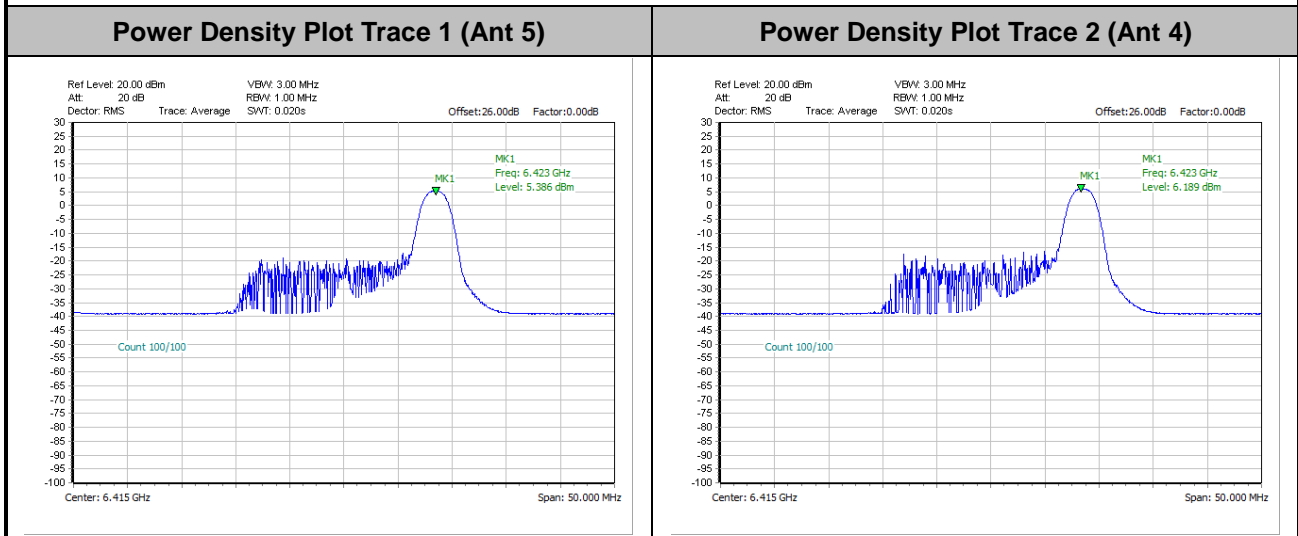




<802.11ax HE40>

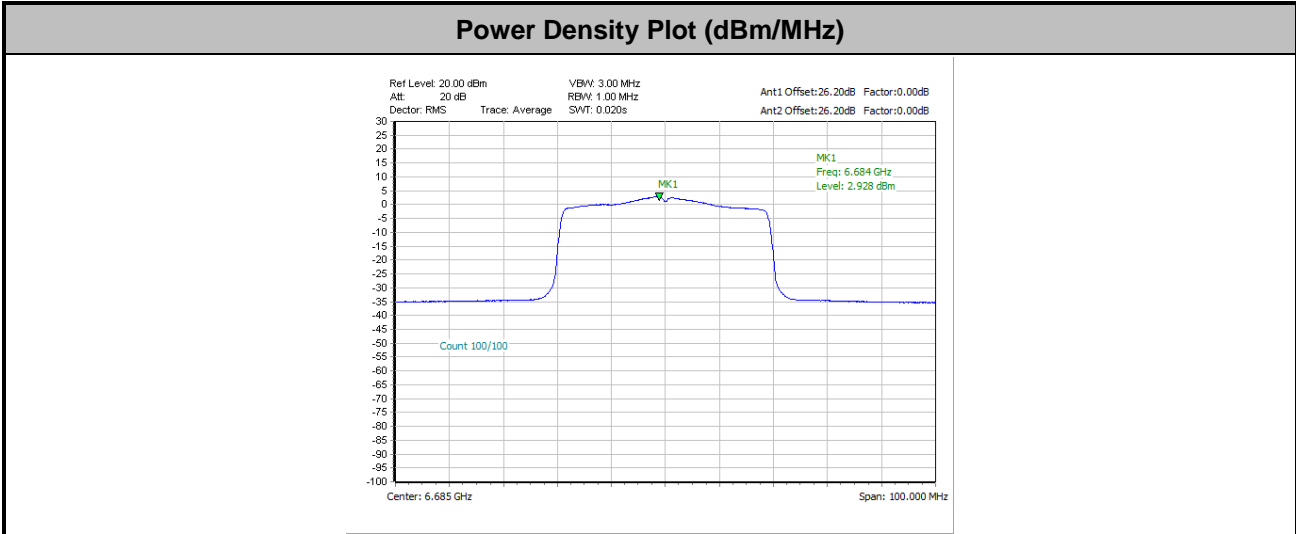


Note:

1. EIRP Power Density (dBm/MHz) = Measured value+ Duty Factor + Directional Gain
2. The test plot is showing a bin by bin combined result mathematically adds two traces.

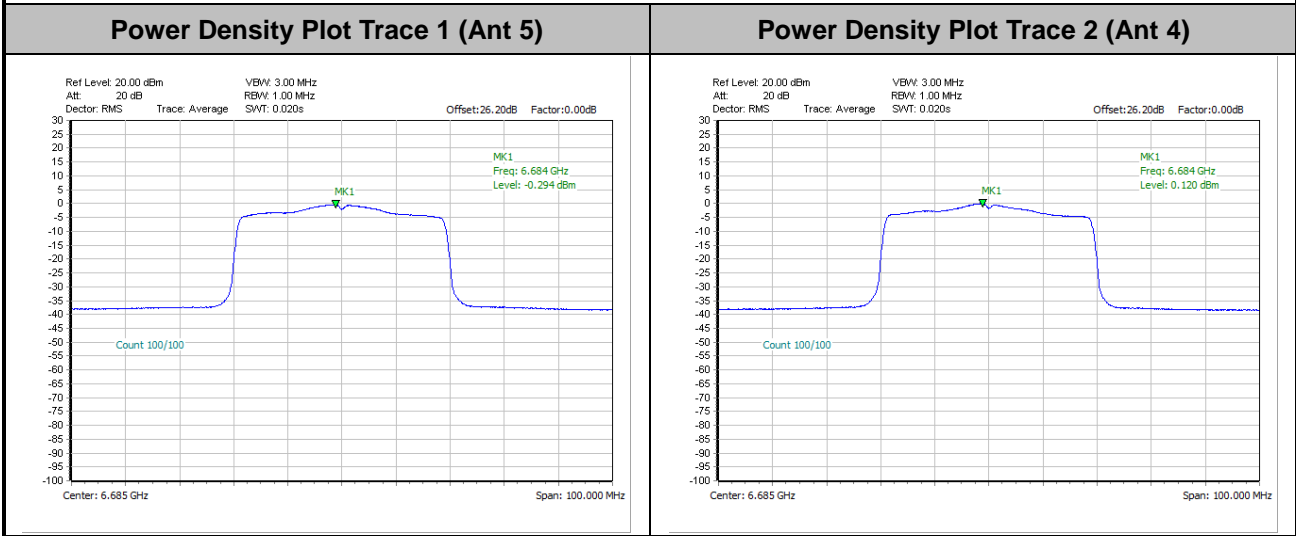




<802.11ax HE80>

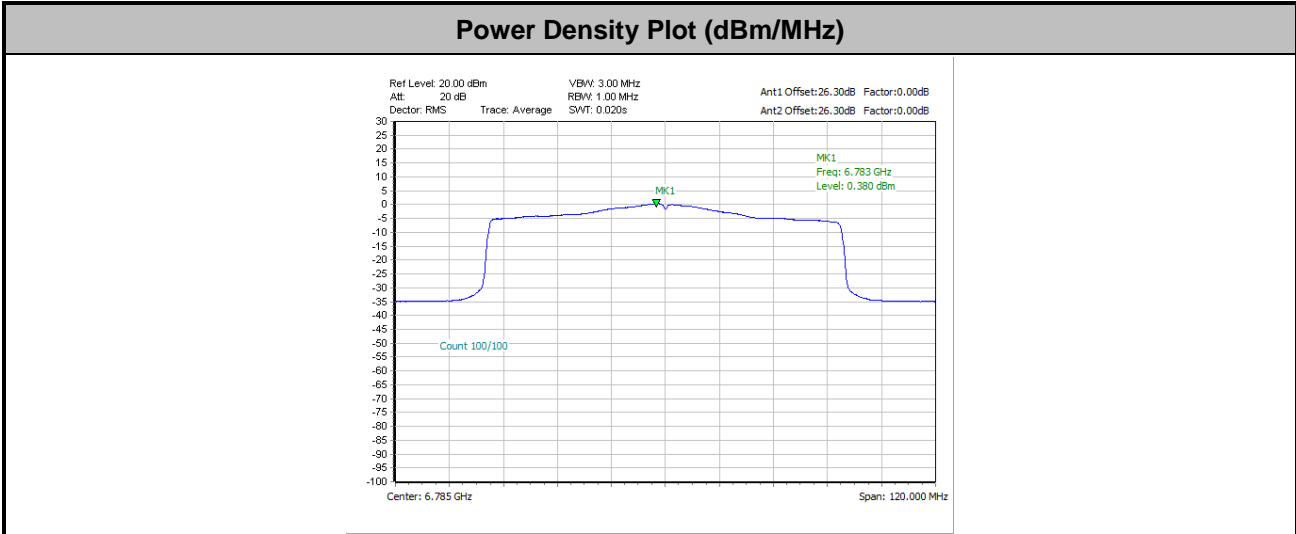


Note:

1. EIRP Power Density (dBm/MHz) = Measured value+ Duty Factor + Directional Gain
2. The test plot is showing a bin by bin combined result mathematically adds two traces.

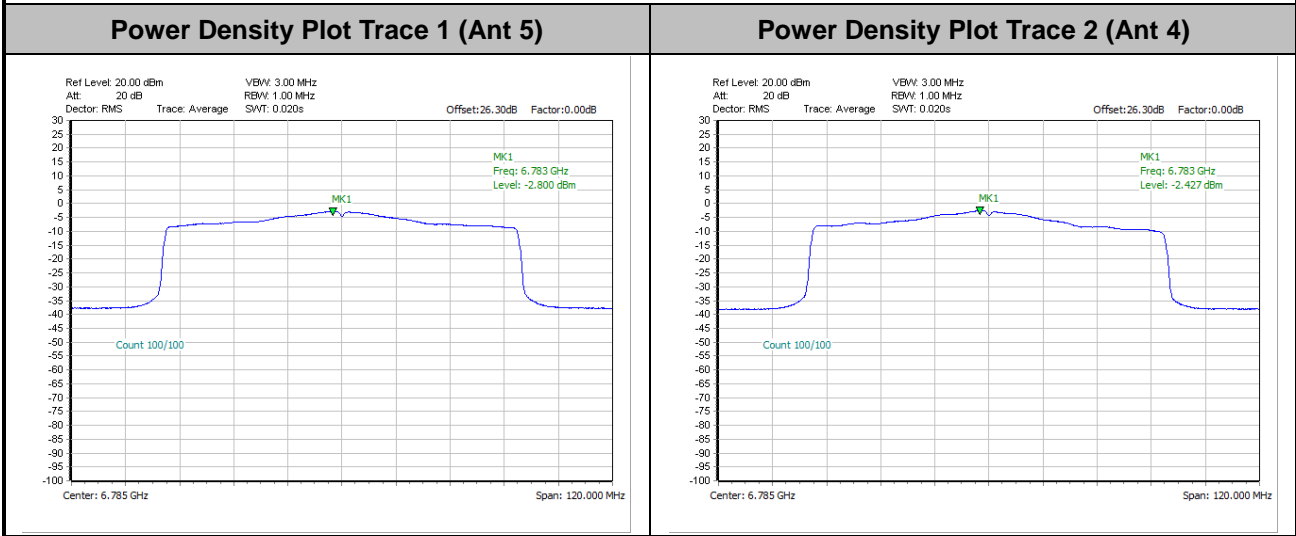




<802.11ax HE160>

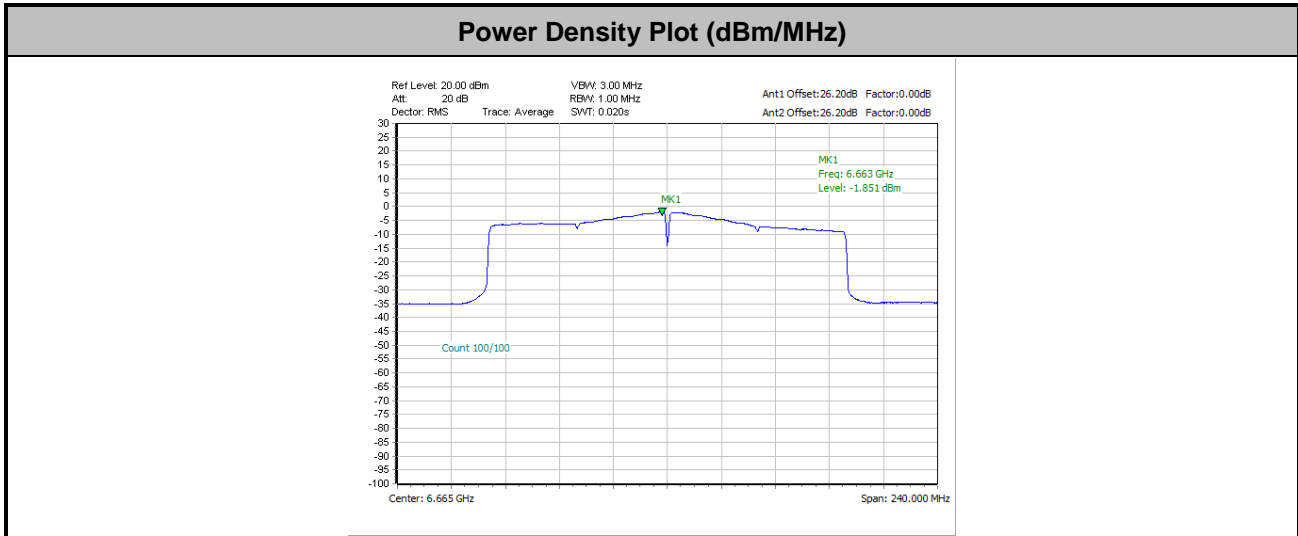

Note:

1. EIRP Power Density (dBm/MHz) = Measured value+ Duty Factor + Directional Gain
2. The test plot is showing a bin by bin combined result mathematically adds two traces.

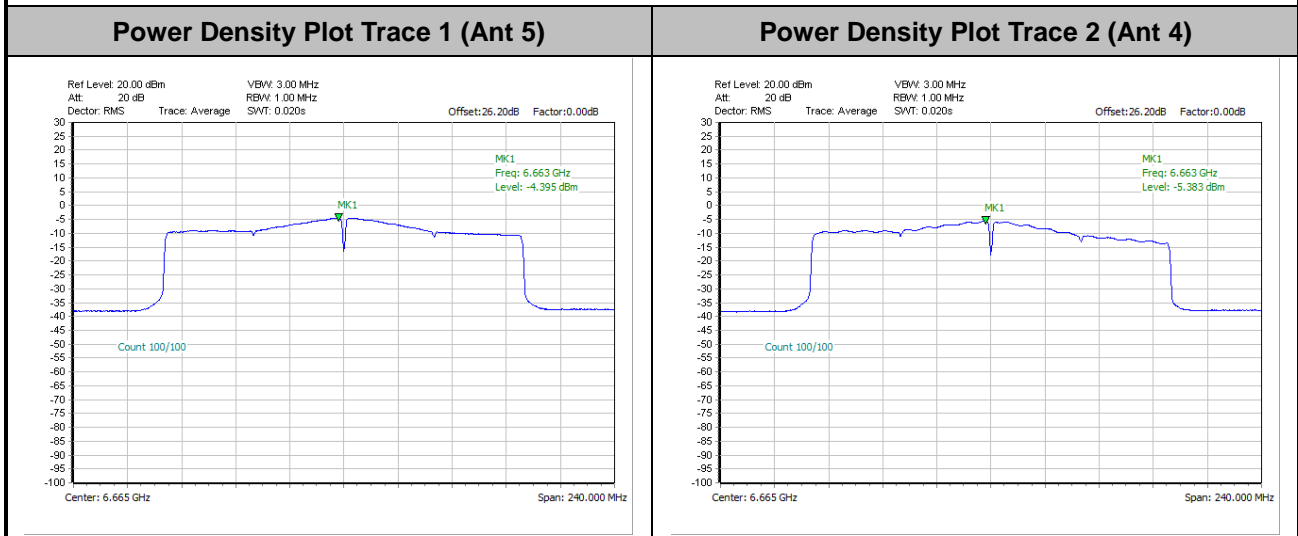



3.4 In-Band Emissions (Channel Mask)

3.4.1 Limit of Unwanted Emissions

<FCC 14-30 CFR 15.407>

(a)(6) For transmitters operating within the 5.925-7.125 GHz bands: Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


3.4.3 Test Procedures

The testing follows FCC KDB 987594 D02 U-NII 6GHz EMC Measurement v01.

Section J) In-Band Emissions.

1. Take nominal bandwidth as reference channel bandwidth provided that 26 dB emission bandwidth is always larger than nominal bandwidth
2. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:
 - a) Set the span to encompass the entire 26 dB EBW of the signal.
 - b) Set RBW = same RBW used for 26 dB EBW measurement.
 - c) Set VBW $\geq 3 \times$ RBW
 - d) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
 - e) Sweep time = auto.
 - f) Detector = RMS (i.e., power averaging)
 - g) Trace average at least 100 traces in power averaging (rms) mode.
 - h) Use the peak search function on the instrument to find the peak of the spectrum.
3. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:
 - a. Suppressed by 20 dB at 1 MHz outside of the channel edge.
 - b. Suppressed by 28 dB at one channel bandwidth from the channel center.
 - c. Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
4. Adjust the span to encompass the entire mask as necessary.
5. Clear trace.
6. Trace average at least 100 traces in power averaging (rms) mode.
7. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

3.4.4 Test Setup

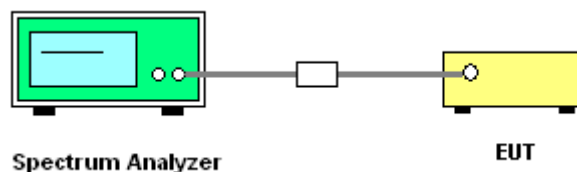




3.4.5 Test Result

<Indoor Client>

MIMO <Ant. 5+4(5)>


EUT Mode :	802.11a
------------	---------

Plot on Channel 5935MHz

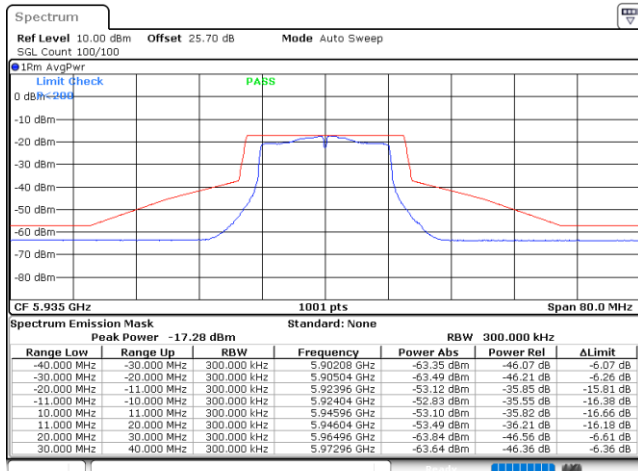


Date: 30.JUN.2022 01:26:28

Plot on Channel 5955MHz

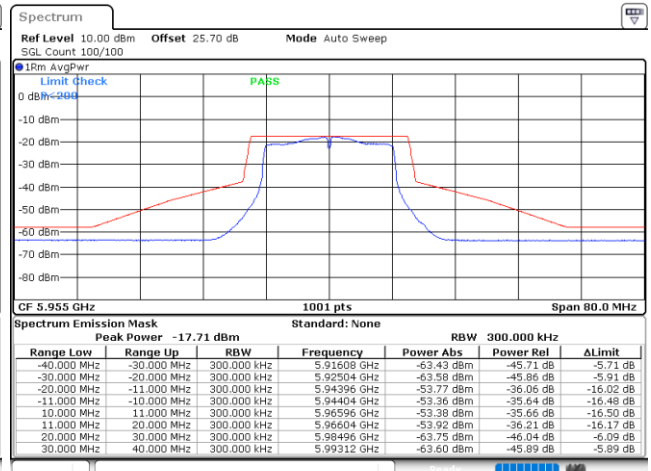


Date: 30.JUN.2022 01:35:00

Plot on Channel 6175MHz

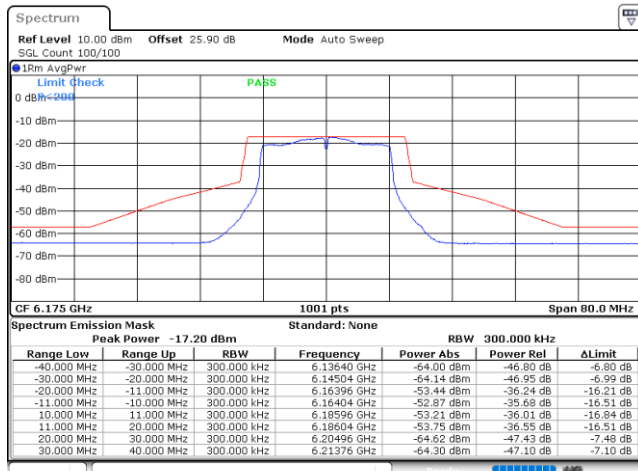

Date: 30.JUN.2022 01:38:51


Plot on Channel 6415MHz

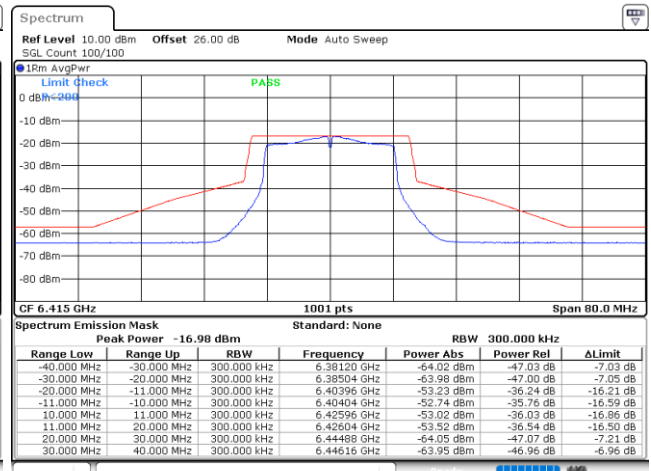

Date: 30.JUN.2022 01:46:20




Plot on Channel 6435MHz

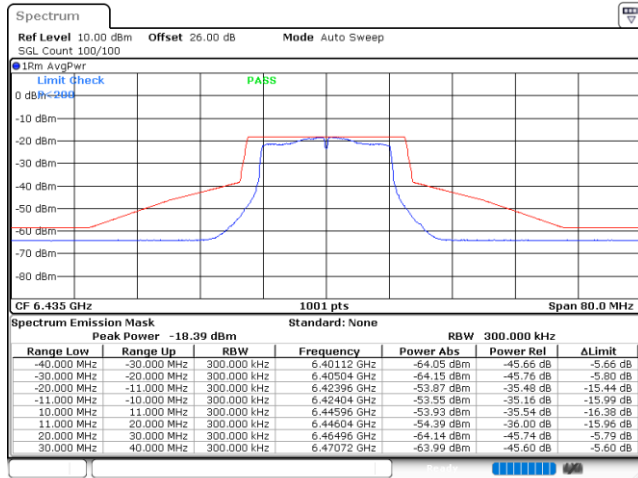


Date: 30 JUN.2022 19:50:31

Plot on Channel 6475MHz

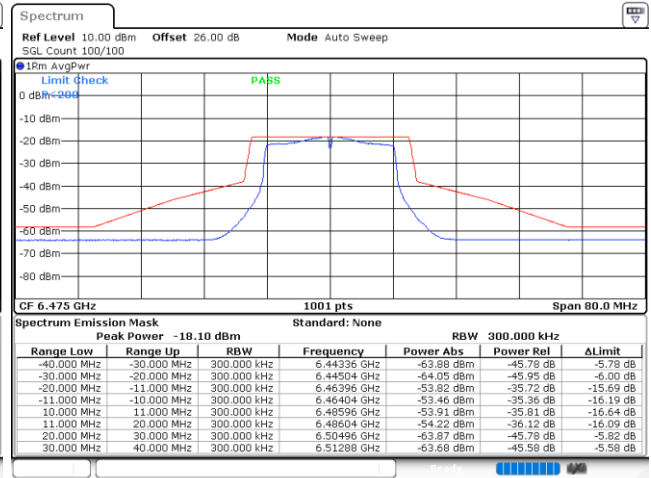


Date: 30 JUN.2022 19:53:26

Plot on Channel 6515MHz

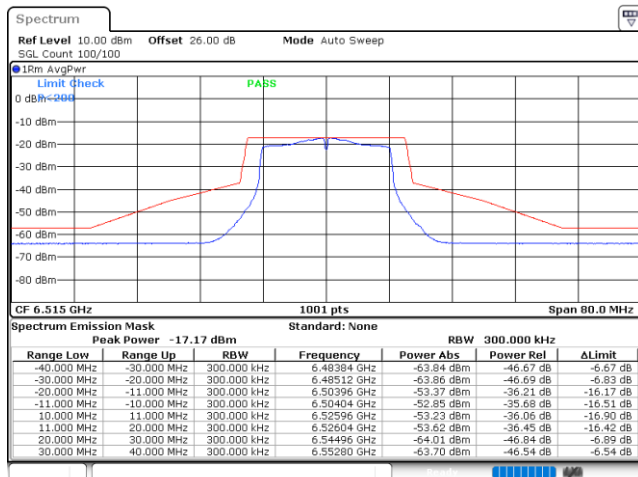

Date: 30 JUN.2022 19:58:49


Plot on Channel 6535MHz

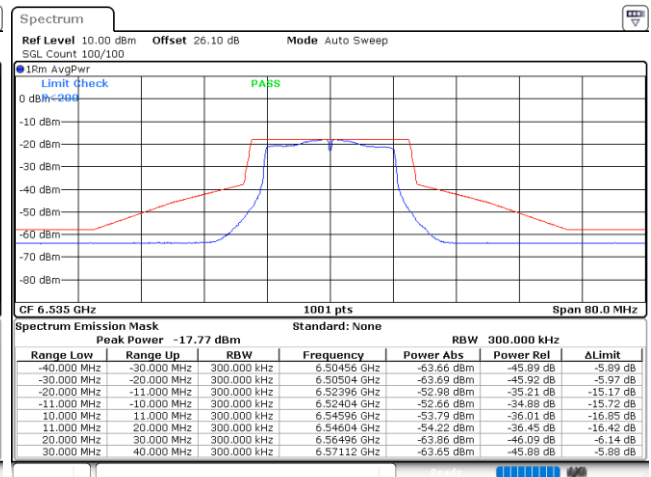

Date: 30 JUN.2022 20:13:53




Plot on Channel 6695MHz

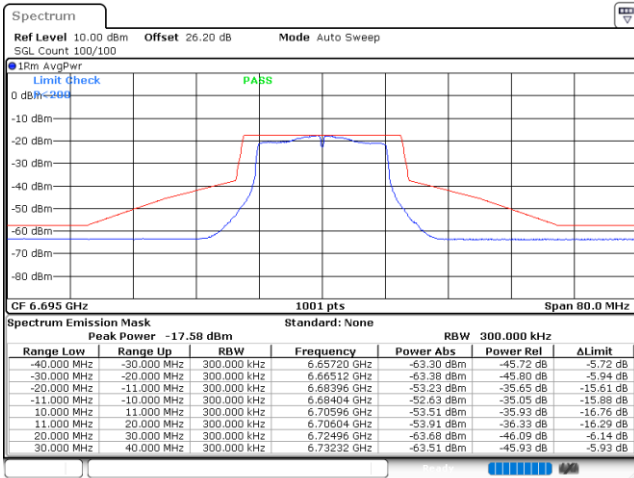


Date: 30 JUN.2022 20:18:12

Plot on Channel 6855MHz

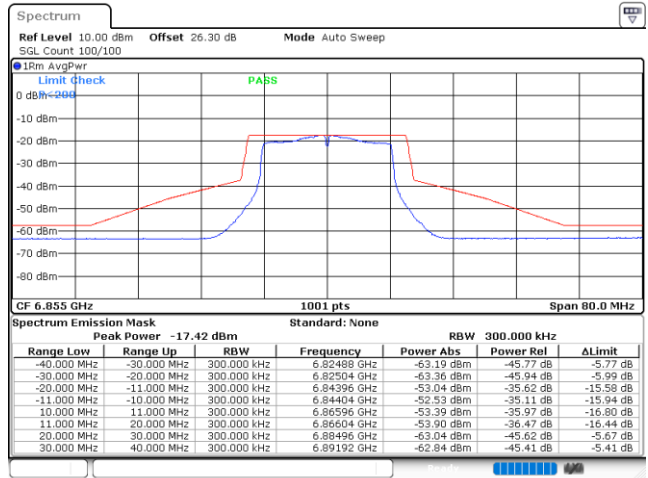


Date: 30 JUN.2022 20:29:33

Plot on Channel 6875MHz

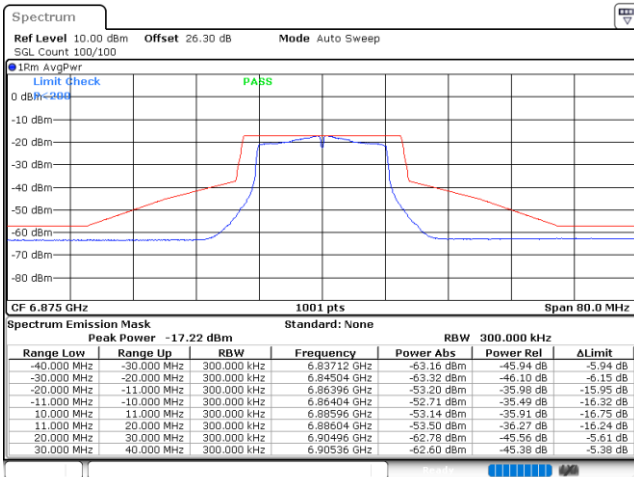

Date: 30 JUN.2022 20:46:33


Plot on Channel 6995MHz

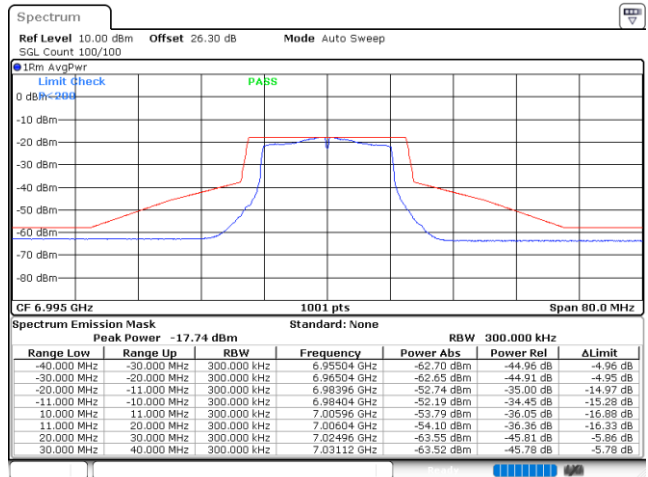

Date: 30 JUN.2022 21:14:43




Plot on Channel 7095MHz

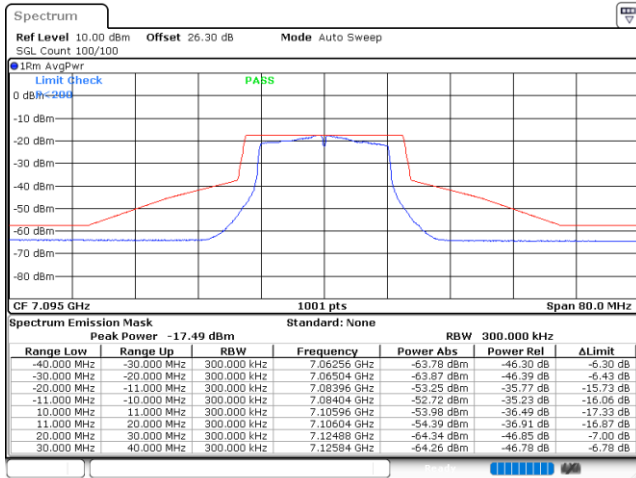

Date: 30 JUN 2022 21:20:27

Plot on Channel 7115MHz

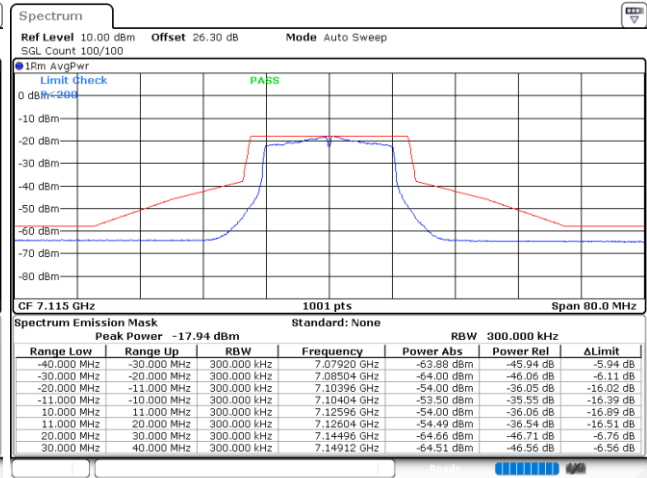


Date: 30 JUN 2022 21:26:39




EUT Mode : 802.11ax HE20 Full RU

Plot on Channel 5935MHz

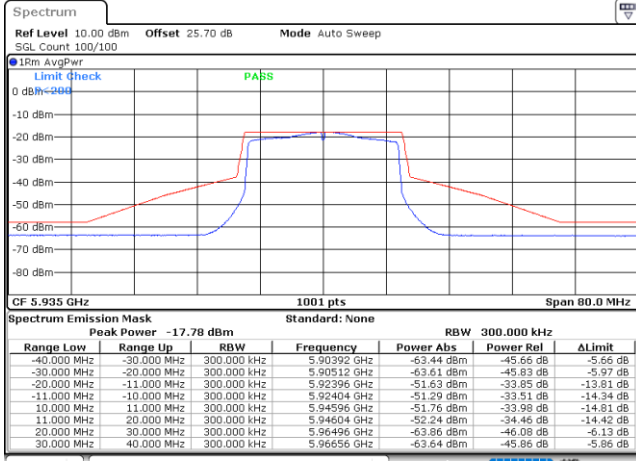


Date: 24 JUN.2022 00:04:15

Plot on Channel 5955MHz

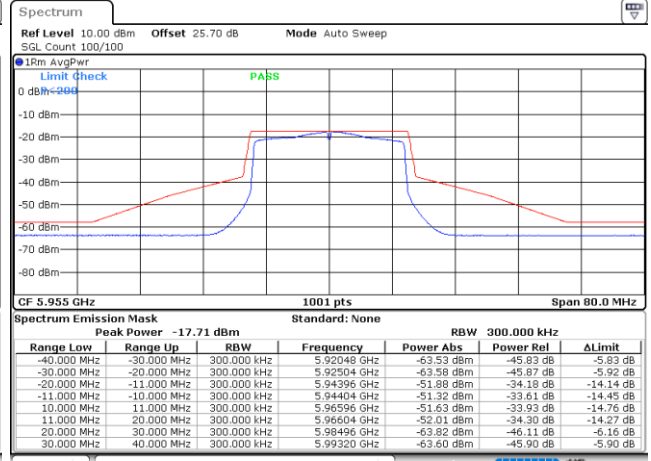


Date: 23 JUN.2022 23:54:22

Plot on Channel 6175MHz

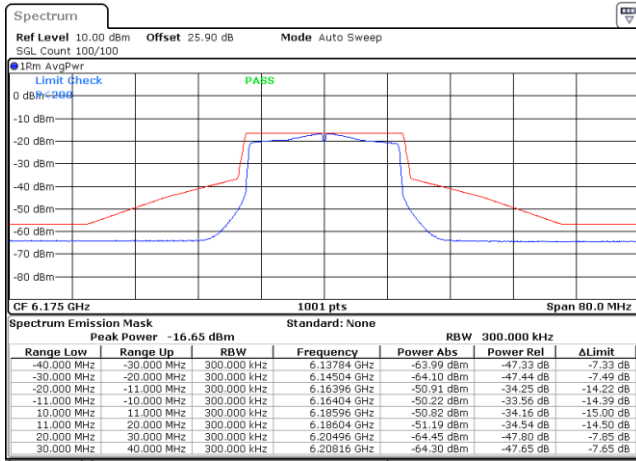

Date: 24 JUN.2022 00:16:39


Plot on Channel 6415MHz

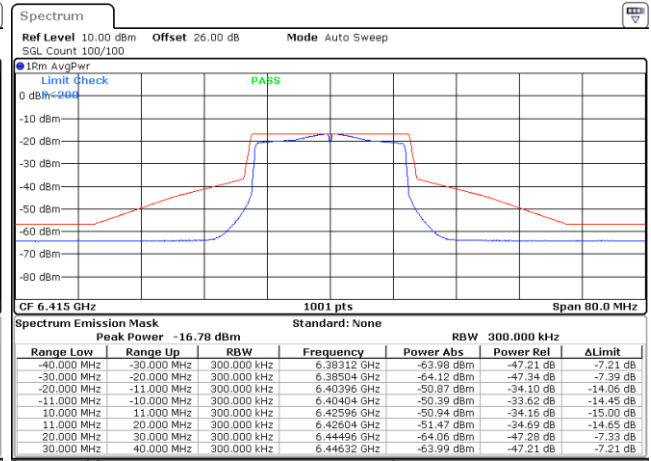

Date: 24 JUN.2022 01:02:13




Plot on Channel 6435MHz

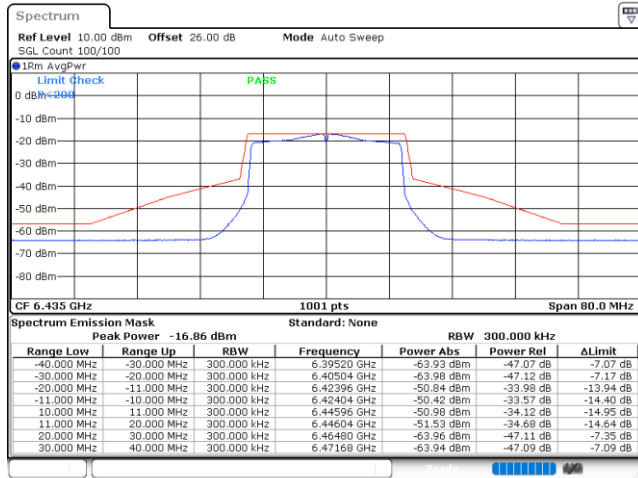


Date: 24.JUN.2022 00:50:02

Plot on Channel 6475MHz

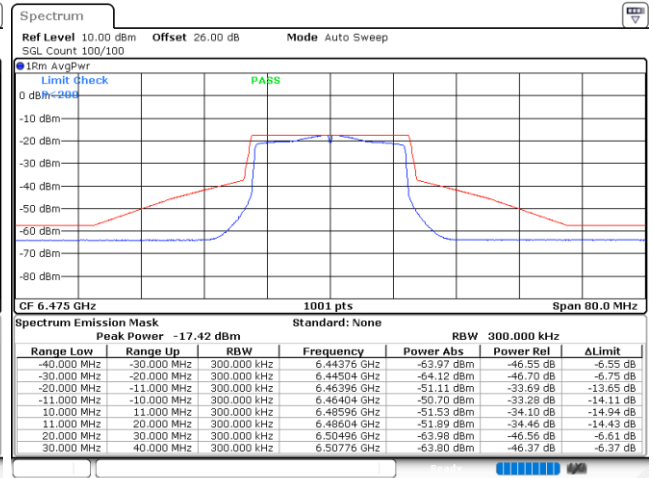


Date: 24.JUN.2022 01:10:01

Plot on Channel 6515MHz

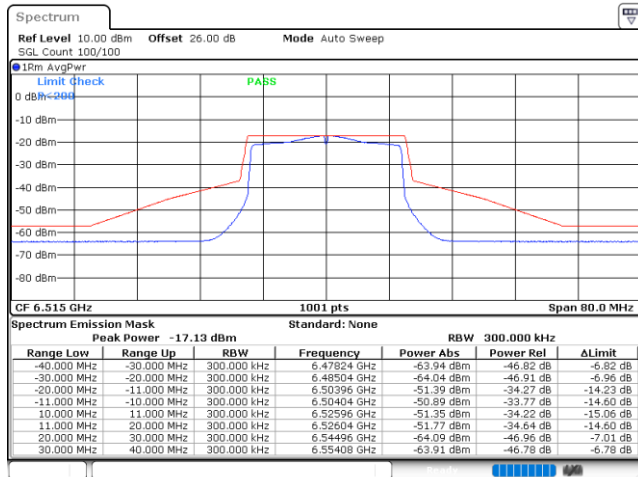

Date: 24.JUN.2022 02:10:45


Plot on Channel 6535MHz

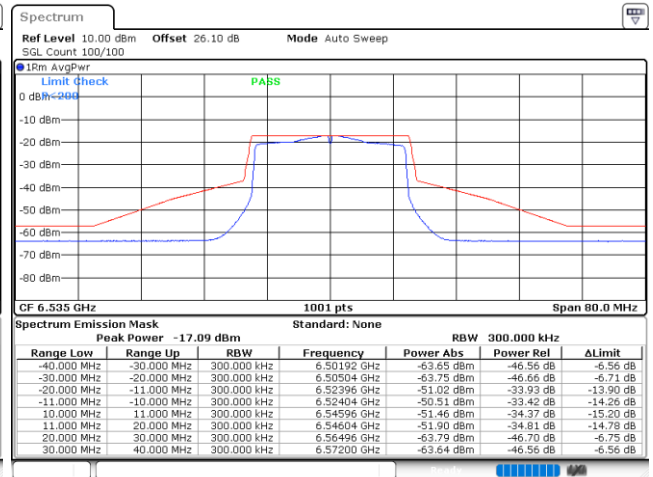

Date: 24.JUN.2022 01:32:37




Plot on Channel 6695MHz

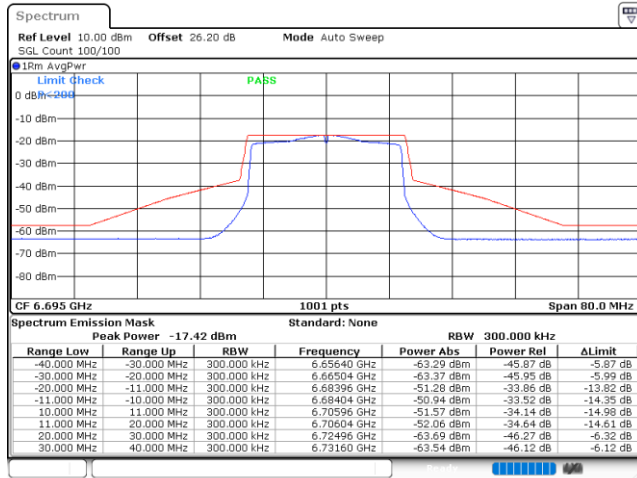


Date: 24.JUN.2022 01:41:22

Plot on Channel 6855MHz

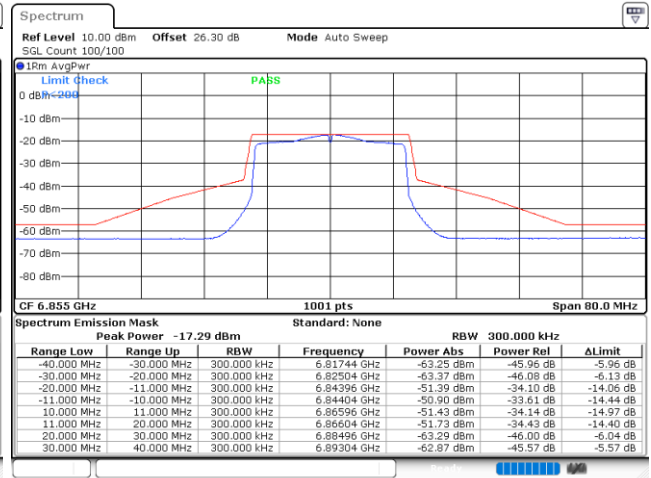


Date: 24.JUN.2022 01:59:30

Plot on Channel 6875MHz

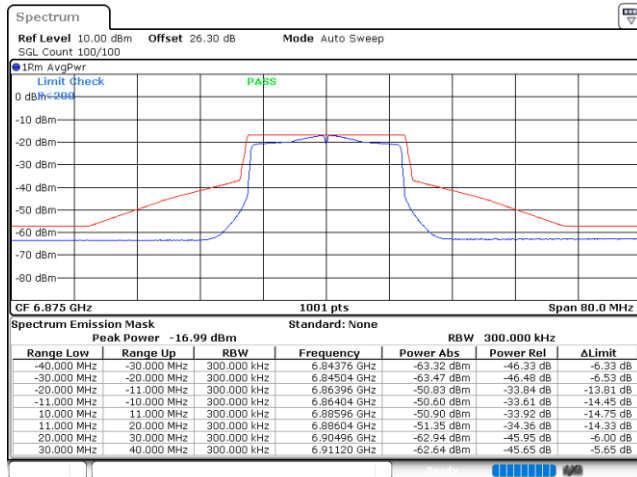

Date: 24.JUN.2022 20:15:11


Plot on Channel 6995MHz

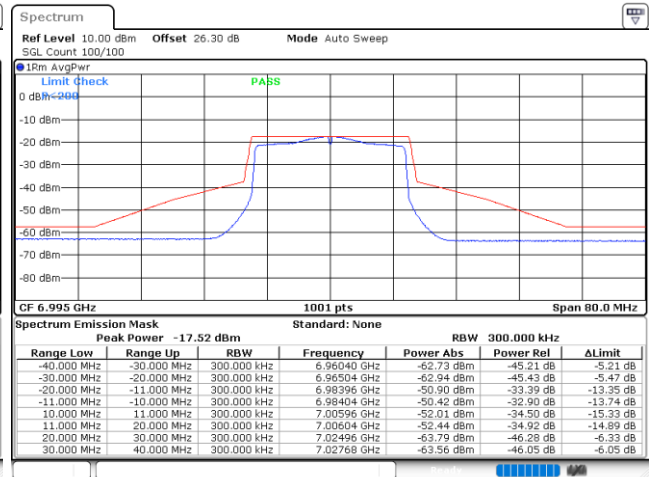

Date: 24.JUN.2022 20:22:36




Plot on Channel 7095MHz

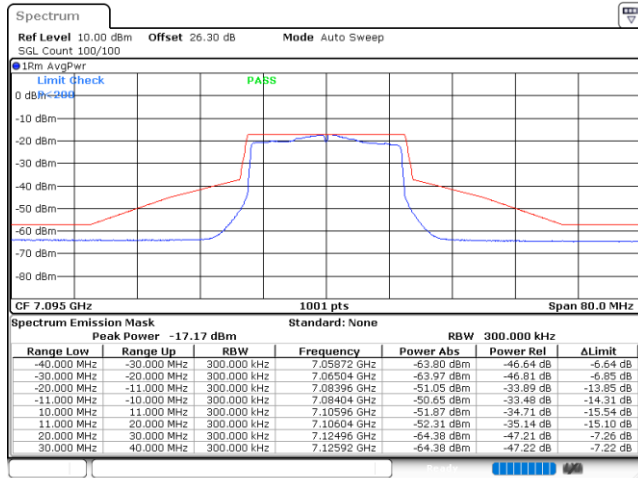

Date: 24.JUN.2022 20:44:35

Plot on Channel 7115MHz

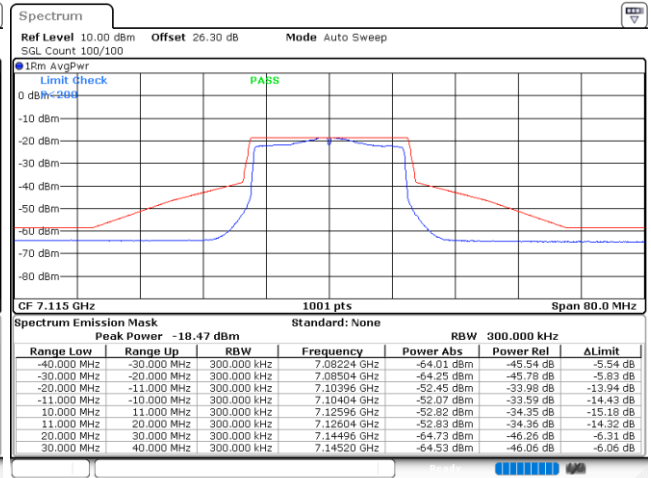


Date: 24.JUN.2022 22:17:11




EUT Mode : 802.11ax HE20 26RU

Plot on Channel 5935MHz

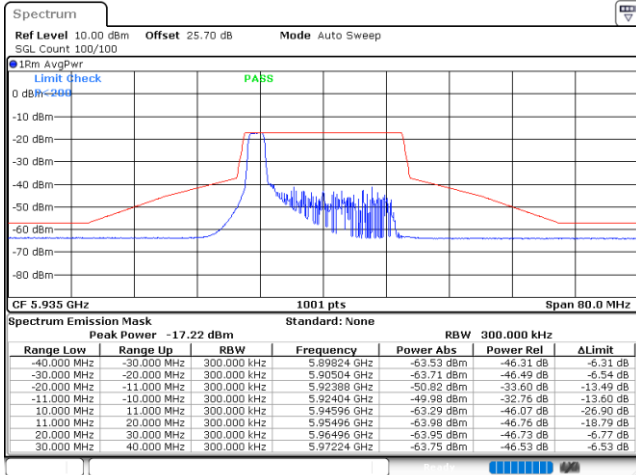


Date: 24 JUN 2022 23:49:04

Plot on Channel 5955MHz

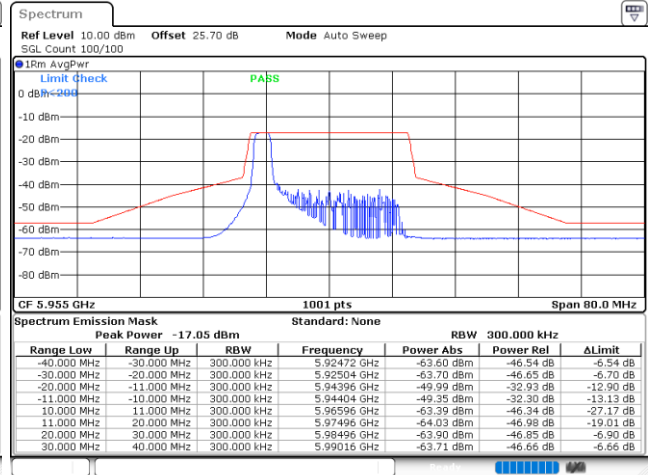


Date: 25 JUN 2022 01:22:11

Plot on Channel 6175MHz

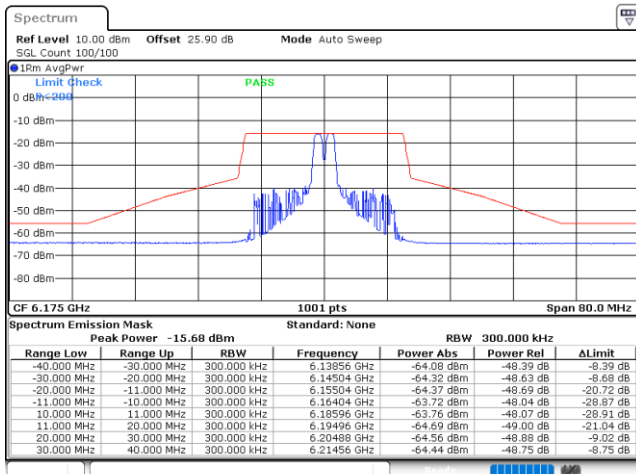

Date: 27 JUN 2022 19:30:13


Plot on Channel 6415MHz

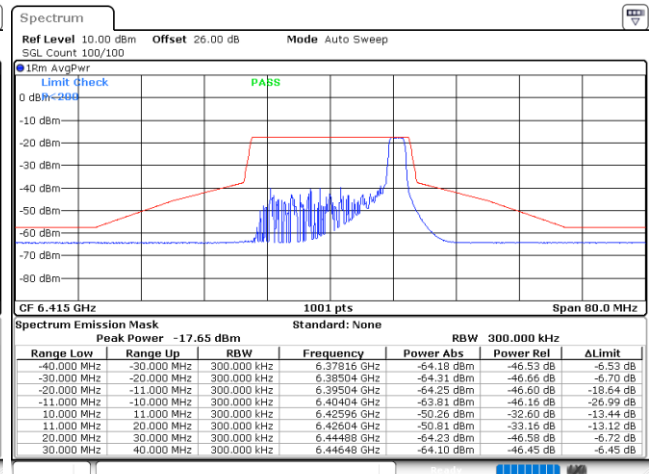

Date: 27 JUN 2022 20:19:42




Plot on Channel 6435MHz

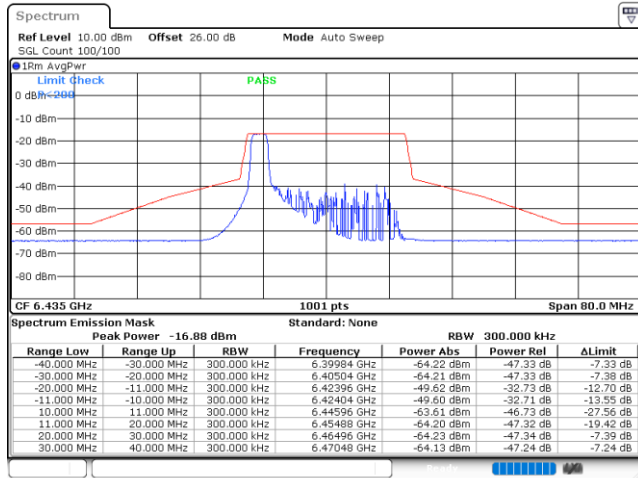


Date: 27 JUN 2022 21:33:43

Plot on Channel 6475MHz

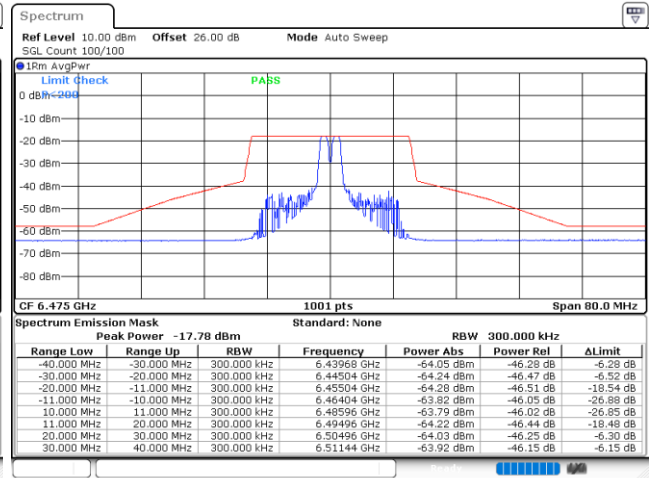


Date: 27 JUN 2022 22:48:34

Plot on Channel 6515MHz

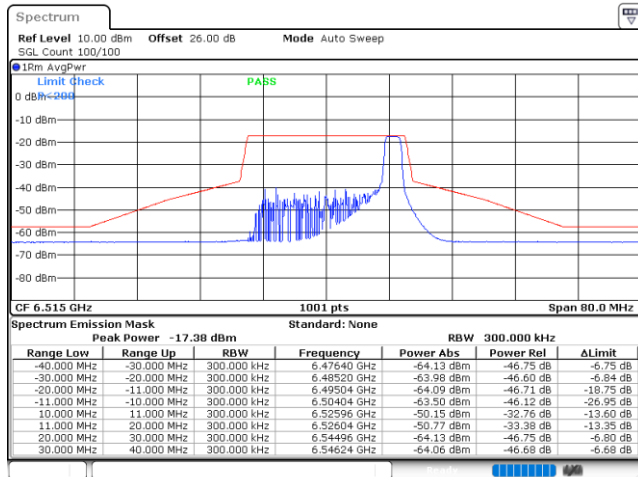

Date: 27 JUN 2022 23:47:09


Plot on Channel 6535MHz

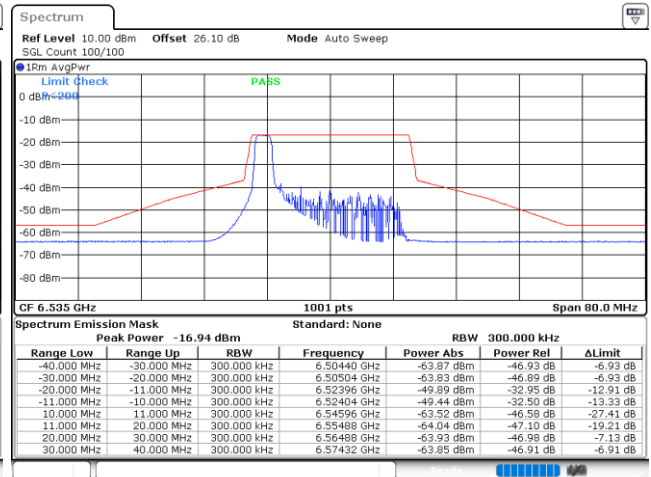

Date: 28 JUN 2022 01:10:07




Plot on Channel 6695MHz

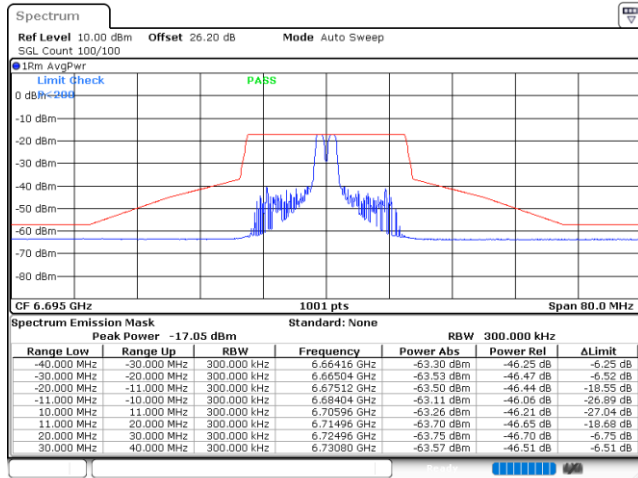


Date: 28 JUN.2022 23:20:04

Plot on Channel 6855MHz

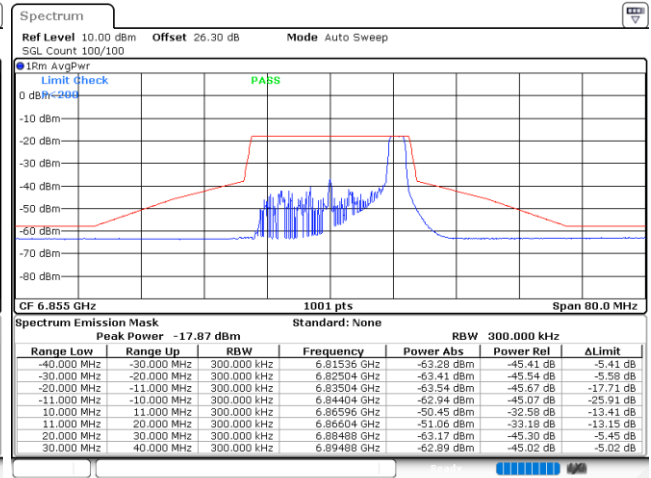


Date: 29 JUN.2022 00:24:38

Plot on Channel 6875MHz

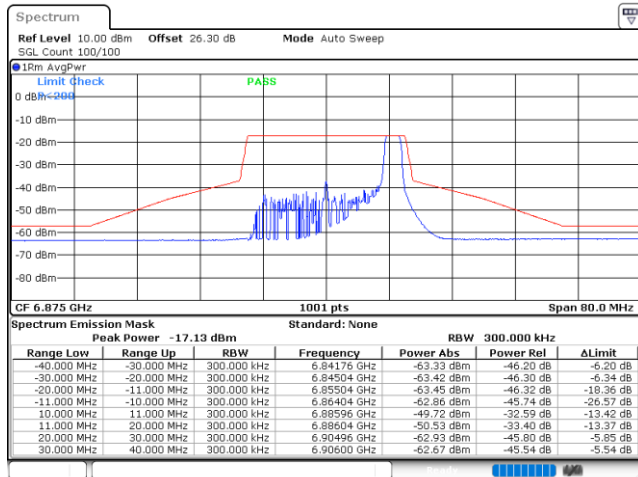

Date: 29 JUN.2022 01:01:52


Plot on Channel 6995MHz

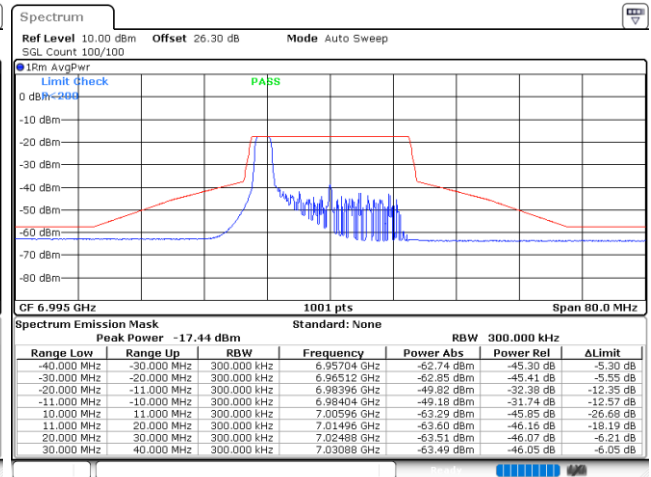

Date: 29 JUN.2022 19:19:23




Plot on Channel 7095MHz

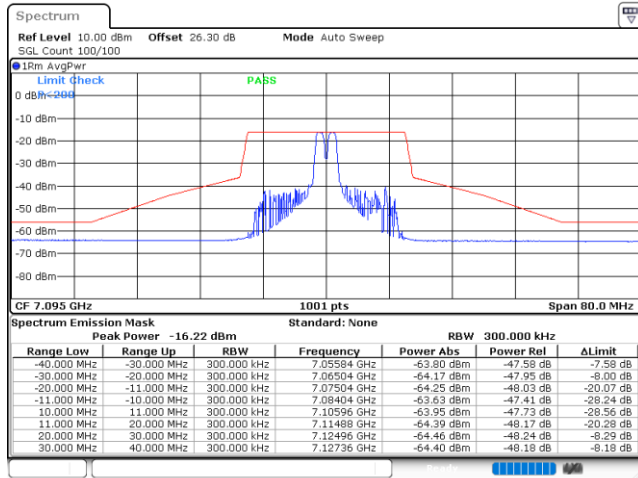

Date: 29 JUN 2022 21:20:25

Plot on Channel 7115MHz

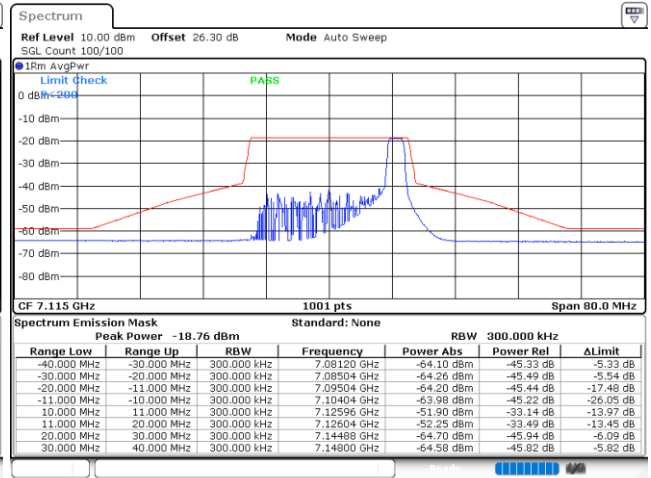


Date: 29 JUN 2022 22:47:43




EUT Mode : 802.11ax HE20 52RU

Plot on Channel 5935MHz

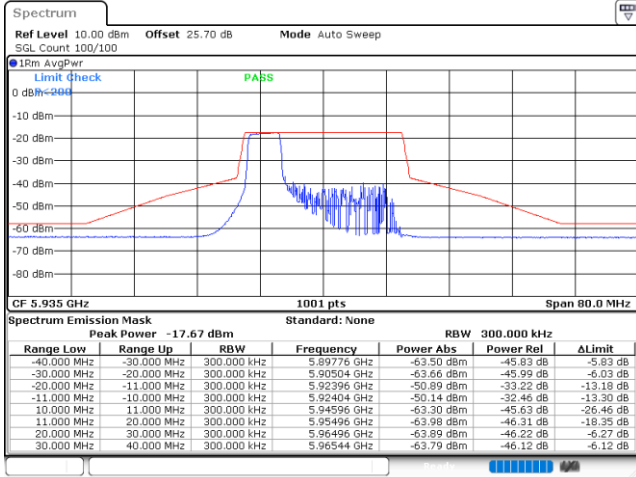


Date: 25 JUN.2022 00:13:28

Plot on Channel 5955MHz

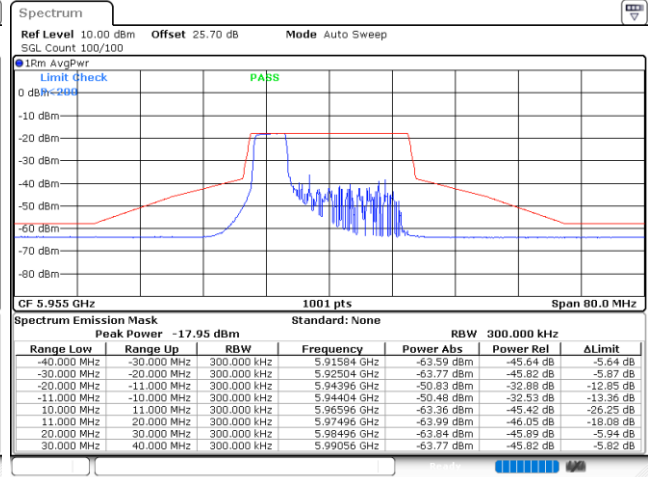


Date: 25 JUN.2022 01:31:37

Plot on Channel 6175MHz

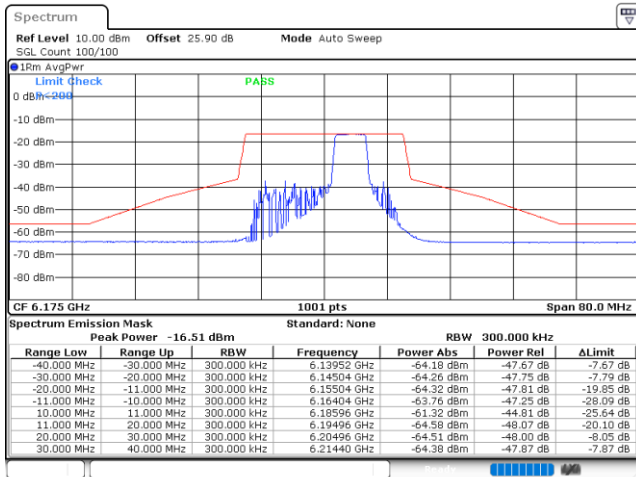

Date: 27 JUN.2022 19:40:08


Plot on Channel 6415MHz

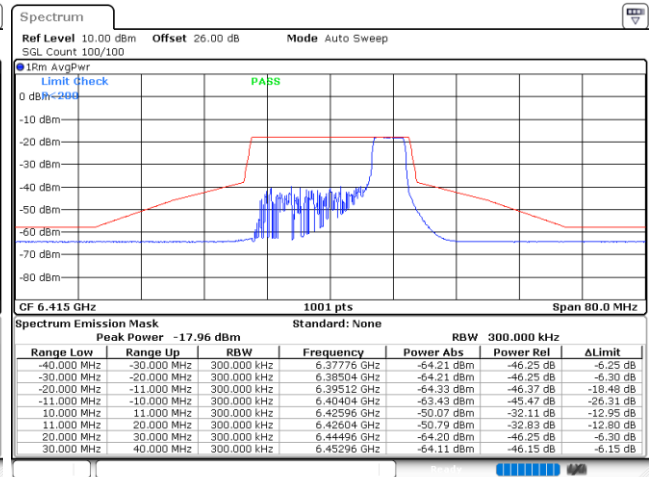

Date: 27 JUN.2022 20:48:08




Plot on Channel 6435MHz

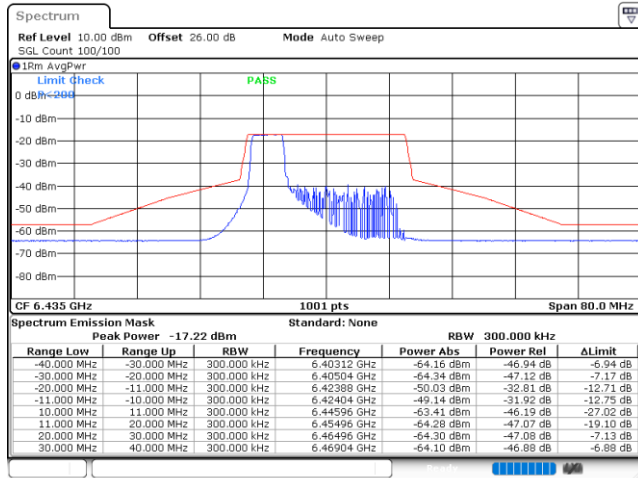


Date: 27 JUN.2022 21:51:54

Plot on Channel 6475MHz

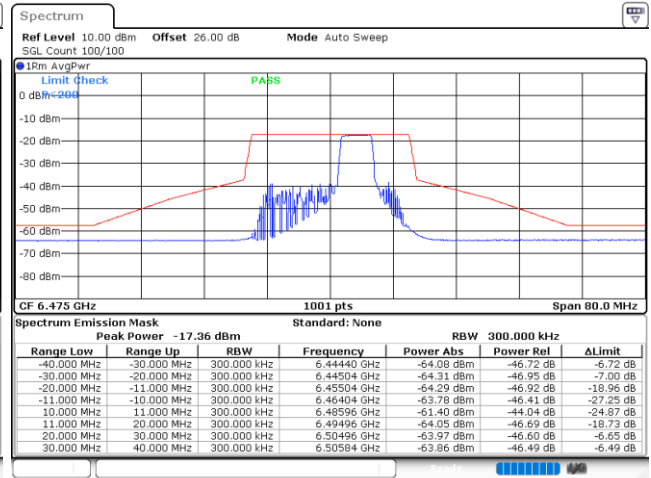


Date: 27 JUN.2022 22:59:50

Plot on Channel 6515MHz

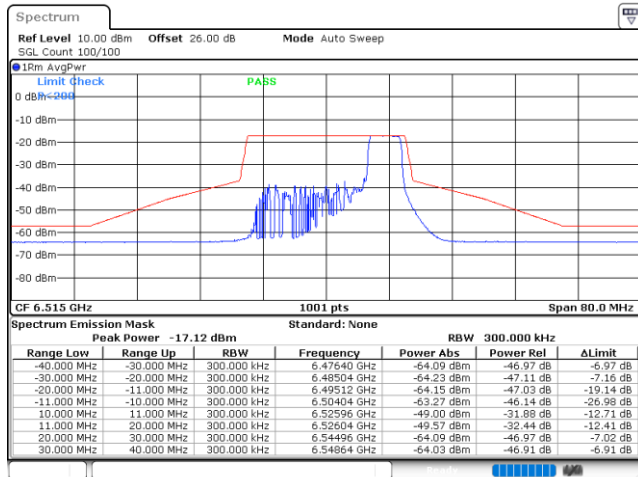

Date: 28 JUN.2022 00:15:02


Plot on Channel 6535MHz

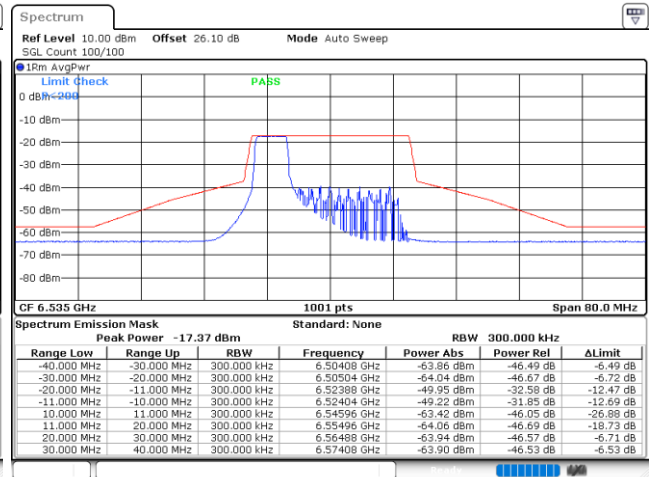

Date: 28 JUN.2022 01:18:15




Plot on Channel 6695MHz

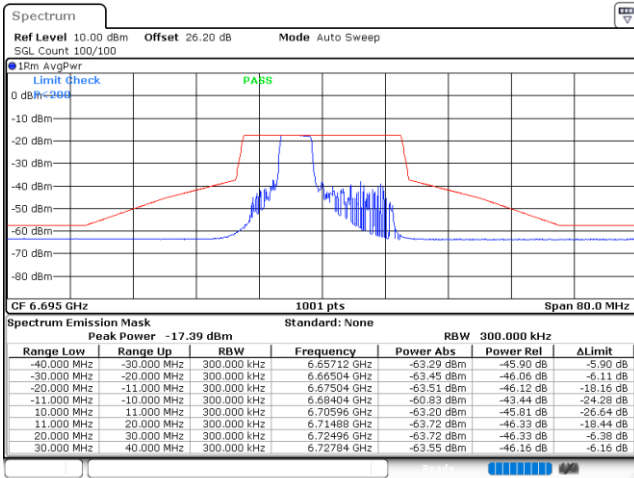


Date: 29 JUN.2022 01:51:27

Plot on Channel 6855MHz

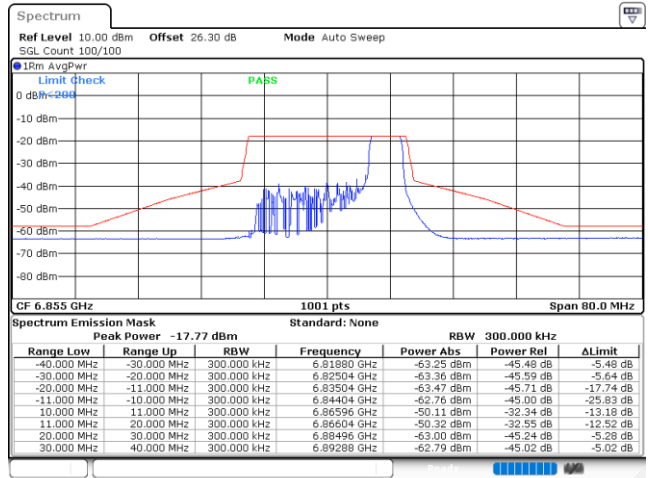


Date: 29 JUN.2022 00:32:27

Plot on Channel 6875MHz

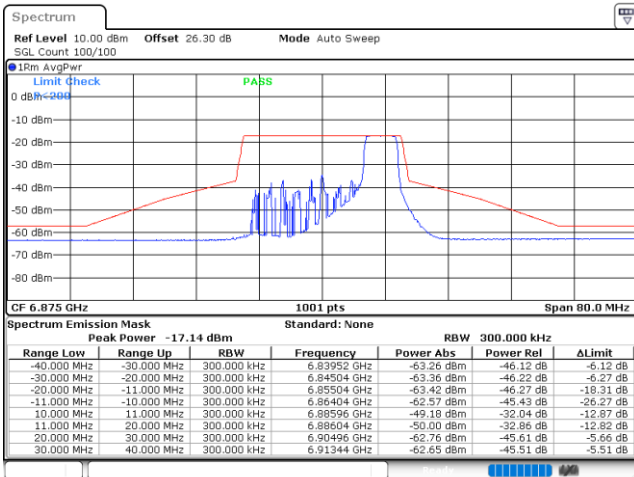

Date: 29 JUN.2022 01:09:28

Plot on Channel 6995MHz

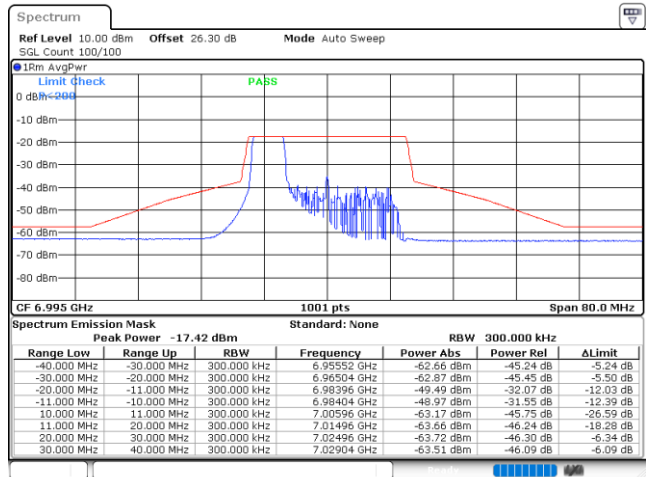


Date: 29 JUN.2022 20:41:38




Plot on Channel 7095MHz

Plot on Channel 7115MHz

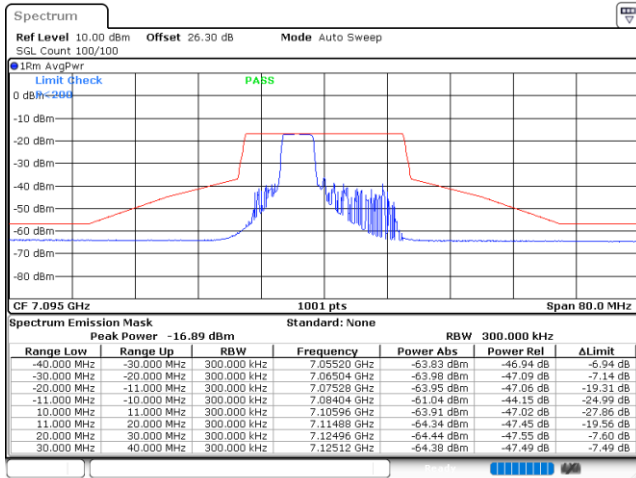

Date: 29 JUN 2022 21:36:03

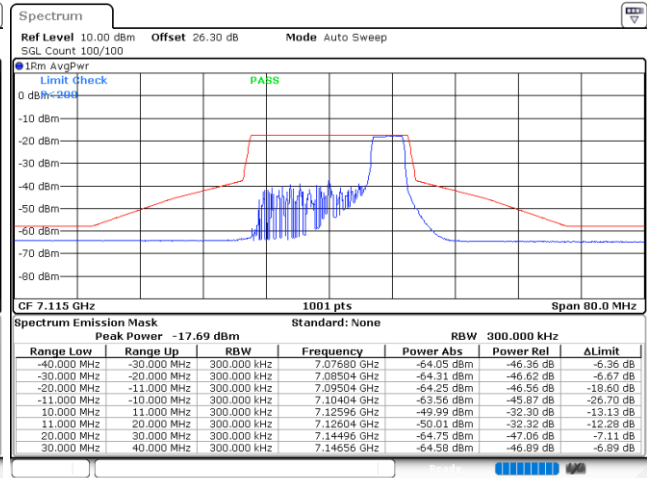

Date: 29 JUN 2022 23:10:33