



# ***T400/T500 Radiated Power and Emissions***

**80-VH688-6 Rev. A**

**March 03, 2008**

---

**Submit technical questions to:  
regulatory.support@qualcomm.com**

QUALCOMM is a registered trademark of QUALCOMM Incorporated in the United States and may be registered in other countries. Other product and brand names may be trademarks or registered trademarks of their respective owners. CDMA2000 is a registered certification mark of the Telecommunications Industry Association, used under license, ARM is a registered trademark of ARM Limited. QDSP is a registered trademark of QUALCOMM Incorporated in the United States and other countries.

This technical data may be subject to U.S. export, re-export, or transfer (“export”) laws. Diversion contrary to U.S. law prohibited.

QUALCOMM Incorporated  
5775 Morehouse Drive  
San Diego, CA 92121-1714  
U.S.A.

Copyright © 2008 QUALCOMM Incorporated.  
All rights reserved.

March 04, 2008

T400/T500 Radiated Power and Emissions  
80-VH688-6 Rev. A

## Revision history

<b>Revision</b>	<b>Date</b>	<b>Description</b>
A	March 2008	Initial release

## Table of Contents

<b>1. Summary.....</b>	<b>1-1</b>
1.1 Purpose .....	1-1
1.2 Module Description .....	1-1
1.3 Host Notebook Information .....	1-2
1.4 Standards References .....	1-2
1.5 Test Result Executive Summary .....	1-3
<b>2. Product Description and Declaration.....</b>	<b>2-1</b>
2.1 System Configuration .....	2-1
<b>3. Test Facility and Equipment .....</b>	<b>3-1</b>
3.1 Test Site .....	3-1
3.2 Laboratory Test Equipment .....	3-1
3.3 Measurement Uncertainty Summary .....	3-1
<b>4. Test Setup, Method and Procedure.....</b>	<b>4-1</b>
4.1 Test Frequencies .....	4-1
4.2 Test Procedures.....	4-1
4.2.1 Transmitter maximum output power .....	4-1
4.2.2 Radiated Emissions.....	4-2
<b>5. Test Results Summary .....</b>	<b>5-1</b>
5.1 Test Result Summary.....	5-1
5.1.1 Radiated Maximum Transmit Output Power .....	5-1
5.1.2 Radiated Emissions Result Summary.....	5-2
5.2 Measured Data .....	5-3
<b>Appendix A Radiated Emissions Test Data.....</b>	<b>A-1</b>
<b>Appendix B Base Station Emulator Settings and Test Procedures .....</b>	<b>B-1</b>

## List of Tables

Table 1.4-1 T400 Host.....	1-2
Table 1.4-2 T500 Host.....	1-2
Table 1.5-1 Standards References .....	1-2
Table 1.6-1 Trans Power Summary.....	1-3
Table 1.6-2 Radiated Emissions Test Summary.....	1-3
Table 2.1-1 Module Summary.....	2-1
Table 3.1-1 Test Site Locations.....	3-1
Table 3.3-1 Radiated Measurement Uncertainties.....	3-2
Table 4.1-1 UNDP-1 Test Channels.....	4-1
Figure 4-1 Radiated Test Setup .....	4-2
Table 5.1-1 GPRS 850MHz ERP Test Result Summary.....	5-1
Table 5.1-2 GPRS 19000MHz EIRP Result Summary .....	5-1
Table 5.1-3 T400 MHz Part22 Highest Emissions Results .....	5-2
Table 5.1-4 T400 MHz Part 24 Highest Emissions Results .....	5-2
Table 5.1-5 T500 MHz Part22 Highest Emissions Results .....	5-2
Table 5.1-6 T500 MHz Part24 Highest Emissions Results .....	5-2
Table 5.3-1 Test equipment for radiated emission .....	A-1
Table 5-2 Parameters for Max. Power with a single traffic code channel, SR1 .....	B-1
Table 5-3 Parameters for Max. Power with multiple traffic code channel, SR1 .....	B-2
Table 5-4 3GPP Rel99/HSPA Subtest Settings .....	B-4

This Page Intentionally Left Blank

# 1. Summary

---

## 1.1 Purpose

Qualcomm Incorporated submits this test report and associated test data in consideration of Regulatory Type Approval for the following Qualcomm manufactured product.

This report contains radiated maximum output power and radiated spurious emissions test results for the UNDP-1 module while installed in Lenovo T400 and T500 notebook computers. This test report supports a Class II Permissive change for J9CUNDP-1L in reference to FCC Part 22 and Part 24 regulations.

Test results and associated data are provided to demonstrate that the UNDP-1 radiated transmit power and radiated emissions when installed in two host notebook computers is lower than the emissions reported in the original module level authorization for FCC J9CUNDP-1L. The host notebook computers reported in this test report utilize NISSEI antennas that have antenna gains less than the antenna gain used in the original module certification. The antenna parameters for the notebook computers are further detailed in the attachments associated with the permissive change filing.

Testing was only completed for GPRS modes as this mode had the highest peak power in the original filing J9CUNDP-1L. The other modes of operations will have lesser peak power as they utilize the same transmit antenna as GPRS and the conducted test results demonstrate that GRPS has the highest peak power.

Note that a change of ID was completed on January 23, 2008 to generate FCC ID J9CUNDP-1L from J9CUNDP-1 original granted January 18, 2008. The UNDP-1 module is electrically and mechanically identical between the two filings.

## 1.2 Module Description

Based on QUALCOMM's premier MDM1000™, RFR6500™, RTR6285™, PM6653™ and system software, UNDP-1 delivers WWAN connectivity solutions for the CDMA2000/1xEV-DO, WCDMA/HSPA and GSM/GPRS/EDGE protocols in one hardware configuration. In addition to WWAN, the product provides GPS in the same hardware device. The UNDP-1 solution consists of hardware and a software application for embedded wireless connectivity in notebook PCs. It is in the form of an embedded PCI Express mini-card.

### 1.3 Host Notebook Information

All testing was conducted in accordance with the requirements document specified in the table below.

**Table 1.3-1 T400 Host**

Host Notebook Model	T-400 (also referred to as ML3)
WLAN FCC ID	N/A
Bluetooth FCC ID	QDS-BRCM1033
UWB FCC IC	N/A
WWAN Antenna(s)	The WWAN transmitter uses a Planner Inverted F antenna manufactured by NISSEI , PN 3172475.
BT Antenna(s)	N/A
WLAN Antenna(s)	N/A
WWAN to user separation distance (cm)	7.4
WLAN to user separation distance (cm)	N/A
Bluetooth to user separation distance (cm)	N/A
WWAN to WLAN antenna separation distance (cm)	6
WWAN to Bluetooth antenna separation distance (cm)	7.4

**Table 1.3-2 T500 Host**

Host Notebook Model	T-400 (also referred to as C5)
WLAN FCC ID	N/A
Bluetooth FCC ID	QDS-BRCM1033
UWB FCC IC	N/A
WWAN Antenna(s)	The WWAN transmitter uses a Planner Inverted F antenna manufactured by NISSEI , PN 3172533
BT Antenna(s)	N/A
WLAN Antenna(s)	N/A
WWAN to user separation distance (cm)	7.1
WLAN to user separation distance (cm)	N/A
Bluetooth to user separation distance (cm)	N/A
WWAN to WLAN antenna separation distance (cm)	5.3
WWAN to Bluetooth antenna separation distance (cm)	7.3

### 1.4 Standards References

**Table 1.4-1 Standards References**

Document Reference Title
FCC CFR47 Part 22; Subpart H
FCC CFR47 Part 24; Subpart E
TIA/EIA 603C (2004)



### 1.5 Test Result Executive Summary

**Table 1.5-1 Radiated Transmit Power Summary**

Notebook	Mode	Band	Max ERP	Max ERP (W)
T400	GPRS	850 MHz	31.03	1.268
T500	GPRS	850 MHz	29.63	0.918

Notebook	Mode	Band	Max EIRP	Max EIRP (W)
T400	GPRS	1900 MHz	30.08	1.019
T500	GPRS	1900 MHz	30.44	1.107

**Table 1.5-2 Radiated Emissions Test Summary**

No.	Requirement	Notebook	Result
1	Part 22 Radiated Emissions	T400	Pass
2	Part 24 Radiated Emissions	T400	Pass
3	Part 22 Radiated Emissions	T500	Pass
4	Part 24 Radiated Emissions	T500	Pass

No emissions within 15dB of the limits were observed.

This Page Intentionally Left Blank

## **2. Product Description and Declaration**

The following declarations are made regarding test of the UNDP-1.

### **2.1 System Configuration**

The UNDP-1 is a universal embedded-data-connectivity modem in the form of PCI Express mini-card.

**Table 2.1-1 Module Summary**

WWAN Module Model	UNDP-1
WWAN Module FCC ID	J9CUNDP-1L
WWAN Module Description	UNDP-1 is a PCI Express Mini Card with WWAN connectivity for the WCDMA/HSPA, GSM/GPRS/EDGE and CDMA2000 1x/1x-EVDO protocols, plus GPS position location.
Host(s) Tested:	Lenovo ML3/T400 and C5/T500
WWAN Technologies	GSM/GPRS/EDGE CDMA 1x Rel0 CDMA EV-DO RevA WCDMA/HSPA
Equipment Categories	GPRS Category 10 EDGE Category 10 HSDPA Category 8 (Release 6) HSUPA Category 5 (Release 6)
TX Frequencies	GSM/GPRS/EDGE: 824.2 – 848.8 MHz GSM/GPRS/EDGE: 1850.2 – 1909.8 MHz CDMA 1x/EV-DO: 824.7 – 848.31 MHz CDMA 1x/EV-DO: 1851.25 – 1908.75 MHz WCDMA/HSPA: 826.4 – 846.6 MHz WCDMA/HSPA: 1852.4 – 1907.5 MHz  Bands Not used in the United States: GSM/GPRS/EDGE: 880.2 – 914.8 MHz GSM/GPRS/EDGE: 1710.2 – 1784.8 MHz WCDMA/HSPA: 1922.6 – 1977.4 MHz
Duty Cycle(s)	CDMA/WCMA: 100% GPRS 1 uplink slot: 12.5% GPRS 2 uplink slots: 25%
Power Supply	3.3Vdc supplied by host notebook computer

This Page Intentionally Left Blank

## 3. Test Facility and Equipment

---

### 3.1 Test Site

All applicable tests were performed at the test facilities noted in Table 3.1-1. For test cases that required equipment not available at Qualcomm facilities, testing was performed at 7 Layers, Inc.

**Table 3.1-1 Test Site Locations**

Test Section EN 301 908-1	Test Site
Maximum Transmit Power	EMC Lab in Building X. This EMC test facility is accredited and listed in the Technology International Lab network, and has been assigned the certificate number 00-042.
Radiated Emissions	EMC Lab in Building X. This EMC test facility is accredited and listed in the Technology International Lab network, and has been assigned the certificate number 00-042.

### 3.2 Laboratory Test Equipment

All measurements were made with instruments whose operation and accuracy have been verified by an accredited calibration laboratory with traceability to National standards.

The test equipment used for radiated measurements is contained in Appendix B of this report.

### 3.3 Measurement Uncertainty Summary

Calibration of the instrumentation used for measurements is performed to ANSI/NCSL, Z540-1-1994, ISO-9001-1994, and ISO 10012-1:1992, and is traceable to NIST reference standards.

Calculated measurement uncertainties for the manual radiated emissions measurements performed in the Qualcomm EMC Lab are as shown in Table 3.3-1 below. The uncertainty values below were calculated using the methodologies defined in ETR 028 (Second Edition, March 1994), ANSI/INCSL Z540-2-1997, NAMAS NIS 81 (May 1994), and NIST TN 1297 (1994 Edition).

Radiated uncertainty value achieved is documented in the 80-31351-1 X1, Qualcomm EMC Lab Uncertainty Report.

**Table 3.3-1 Radiated Measurement Uncertainties**

<b>Measured Parameter</b>	<b>Calculated Expanded Measurement Uncertainty for a 95% Confidence Level (k = 2 Coverage Factor)</b>	<b>Maximum Measurement Uncertainty (UE) Required in EN 301 908-1 v3.2.1</b>
Effective radiated RF power	± 2.63 dB 30 - 180 MHz	± 6 dB
Effective radiated RF power	± 2.63 dB 180 - 1000 MHz	± 3 dB
Effective radiated RF power	± 2.82 dB 1 GHz to 12.75 GHz	± 3 dB

## 4. Test Setup, Method and Procedure

### 4.1 Test Frequencies

GPRS low, mid, and high channels were tested at the frequencies defined in Table 4.1-1. No other modes were tested.

**Table 4.1-1 UNDP-1 Test Channels**

	850 MHz						1900 MHz					
	Low		Mid		High		Low		Mid		High	
	Ch	Freq	Ch	Freq	Ch	Freq	Ch	Freq	Ch	Freq	Ch	Freq
GSM	128	824.2	190	836.6	251	848.8	512	1850.2	661	1880	810	1909.8
CDMA	1013	824.7	384	836.52	777	848.31	25	1851.25	600	1880	1175	1908.75
WCDMA	UL: 4132 DL: 4357	826.4	UL: 4182 DL: 4407	836.4	UL: 4233 DL: 4458	846.6	UL: 9262 DL: 9847	1852.4	UL: 9400 DL: 9800	1880	UL: 9538 DL: 9763	1907.6

### 4.2 Test Procedures


For all testing, the UNDP module was configured to transmit at maximum power for all testing per the procedure defined in Appendix B.

#### 4.2.1 Transmitter maximum output power

Maximum output power was tested per the procedure defined in Section 2.2.17 of TIA/EIA 603C.

To maximize the measured emissions levels, the receive antenna was moved between a 1 and 4 meter height, and the EUT was rotated from 0 to 360 degrees.

**Figure 4-1 Radiated Test Setup**

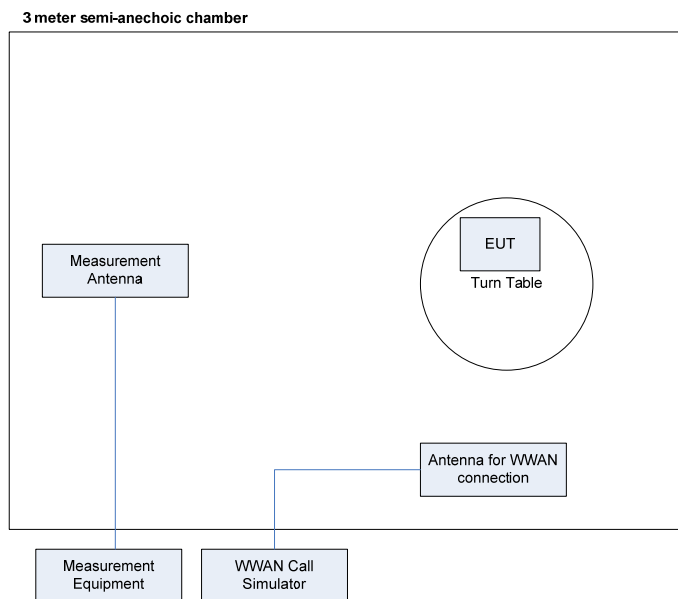

**4.2.2 Radiated Emissions**

Radiated emissions were tested per the procedure defined in Section 2.2.12 of TIA/EIA 603C.

To maximize the measured emissions levels, the receive antenna was moved between a 1 and 4 meter height, and the EUT was rotated from 0 to 360 degrees.



## 5. Test Results Summary

---

This section summarizes the results of the tests, having compared the measured data against the applicable criteria from FCC Part 22 and Part 24. Measurement test data can be found in the Appendix sections.

### 5.1 Test Result Summary

#### 5.1.1 Radiated Maximum Transmit Output Power

**Table 5.1-1 GPRS 850MHz ERP Test Result Summary**

Channel	GSM850					
	128		190		251	
Notebook	(dBm ERP)	(W ERP)	(dBm ERP)	(W ERP)	(dBm ERP)	(W ERP)
T400	30.14	1.033	30.12	1.028	31.03	1.268
T500	27.63	0.579	27.56	0.570	29.63	0.918

**Table 5.1-2 GPRS 1900MHz EIRP Result Summary**

Channel	GSM1900					
	512		661		810	
Notebook	(dBm EIRP)	(W EIRP)	(dBm EIRP)	(W EIRP)	(dBm EIRP)	(W EIRP)
T400	28.87	0.771	30.16	1.038	30.44	1.107
T500	28.83	0.764	28.34	0.682	30.08	1.019

5.1.2 Radiated Emissions Result Summary

**Table 5.1-3 T400 MHz Part22 Highest Emissions Results**

Channel	Freq	Emission ERP (dBm)	Spec (dBm)	Margin
251	2546.4	-39.1	-13	-26.1
128	2472.6	-39.18	-13	-26.18
128	1648.4	-39.8	-13	-26.8
190	2509.8	-40.85	-13	-27.85
128	1648.4	-43.24	-13	-30.24

**Table 5.1-4 T400 MHz Part 24 Highest Emissions Results**

Channel	Freq	Emission EIRP (dBm)	Spec (dBm)	Margin
810	5729.4	-39.24	-13	-26.24
512	5550.6	-39.9	-13	-26.9
661	5640	-40.46	-13	-27.46
512	3700.4	-40.5	-13	-27.5
810	5729.4	-41.08	-13	-28.08
512	5550.6	-41.7	-13	-28.7

**Table 5.1-5 T500 MHz Part22 Highest Emissions Results**

Channel	Freq	Emission ERP (dBm)	Spec (dBm)	Margin
190	2509.8	-30.92	-13	-17.92
251	2546.4	-31.47	-13	-18.47
251	1697.6	-33.09	-13	-20.09
128	1648.4	-33.68	-13	-20.68
190	1673.2	-33.68	-13	-20.68
128	1648.4	-35.13	-13	-22.13
190	2509.8	-35.92	-13	-22.92
128	2472.6	-36.88	-13	-23.88

**Table 5.1-6 T500 MHz Part24 Highest Emissions Results**

Channel	Freq	Emission EIRP (dBm)	Spec (dBm)	Margin
810	7639.2	-34.78	-13	-21.78
810	7639.2	-35.4	-13	-22.4
512	5550.6	-38.1	-13	-25.1
661	5640	-38.91	-13	-25.91
512	3700.4	-39.85	-13	-26.85
810	5729.4	-40.3	-13	-27.3

## **5.2 Measured Data**

All measured data appears in the attached appendixes of this report. Data for the tests performed radiated appear in Appendix A and data for the conducted measurements appear in Appendix A .

This Page Intentionally Left Blank

## Appendix A Radiated Emissions Test Data

### A.1 Overview

Job Number: 71825

Doc Path: \\fuelcell\vooodoo\EMC Lab and Test Data\2008\08006 UNDP Lenovo Emissions

Project Title: UNDP-1 Regulatory Certification Testing

Completion date: 02/29/2008

EUT: UNDP-1

Temperature: 24 °C

Relative Humidity: 57%

Barometric Pressure: 754mm

EMC TECH: Cang Nguyen, Suzy Galati

EMC Engineer: John Forrester

### A.2 Test Equipment

**Table 5.2-1 Test equipment for radiated emission**

Manufacturer	Model No.	Serial No.	Description	Cal Due Date
EMCO	3115	9612 - 5043	Horn Antenna 1 - 18 GHz	09/20/08
Agilent	E4440 A	K159342	PSA Series Spectrum Analyzer, 3 Hz to 26.5 GHz	09/01/08
Agilent	8449B	3008A01691	High Frequency Pre - Amplifier 1 - 26.5 GHz	05/23/08
Agilent	E4440 A	MY44022417	PSA Series Spectrum Analyzer, 3 Hz to 26.5 GHz	03/04/08
Agilent	8447D OPT 010	2944A09692	Low Frequency Pre - Amplifier 100 kHz - 1.3 GHz	03/20/08
Rohde & Schwarz	ESPC	K56981	EMI Test Receiver	11/16/08
Chase	CBL6144	1009	Green X Wing/Bilog Antenna 20 MHz - 2 GHz	03/03/08
Take up Reel	N - Type	Take up Reel	Take Up Reel	06/25/08
Gore	N - Type	3	Gore Cable 3, pre - amp to SA	06/25/08
Gore	N - Type	12	Gore Cable 12, test receiver/antenna to pre - amp	06/25/08
Gore	N - Type	14	Gore Cable 14, bulkhead to take up reel	06/25/08

**A.3 T400 GPRS Low Ch 850MHz**

EUT: UNDP-1 with T400  
 Mode: GPRS; 2UL slots  
 Band: 850 MHz  
 Channel: Low -128  
 Test: Radiated ERP and Emissions

Channel	Freq	Measurement BW	Ant Pol (V/H)	SA reading (dBUV/m)	Signal Generator Reading (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Antenna Gain (dBi)	ERP (dBm)	EIRP (dBm)	Spec (dBm ERP)	Margin
128	824.2	1 MHz	H	127.31	21.6	0.4	5.83	8	27.03	29.2	38.5	-11.47
128	824.2	1 MHz	V	129.12	24.71	0.4	5.83	8	30.14	32.31	38.5	-8.36
128	1648.4	1 MHz	H	57.66	-50.84	-3.5	4.63	6.8	-43.24	-40.54	-13	-30.24
128	1648.4	1 MHz	V	60.6	-47.4	-3.5	4.63	6.8	-39.8	-37.1	-13	-26.8
128	2472.6	1 MHz	H	52.6	-58.91	-3.7	5.73	7.9	-50.01	-47.31	-13	-37.01
128	2472.6	1 MHz	V	57.8	-48.08	-3.7	5.73	7.9	-39.18	-36.48	-13	-26.18
128	3296.8	1 MHz	H	50.9	-59.3	-4.2	8.03	10.2	-47.6	-44.9	-13	-34.6
128	3296.8	1 MHz	V	51.5	-57.9	-4.2	8.03	10.2	-46.2	-43.5	-13	-33.2
128	4121	1 MHz	H	Noise Floor								
128	4121	1 MHz	V	Noise Floor								
128	4945.2	1 MHz	H	Noise Floor								
128	4945.2	1 MHz	V	Noise Floor								
128	5769.4	1 MHz	H	Noise Floor								
128	5769.4	1 MHz	V	Noise Floor								
128	6593.6	1 MHz	H	Noise Floor								
128	6593.6	1 MHz	V	Noise Floor								
128	7417.8	1 MHz	H	Noise Floor								
128	7417.8	1 MHz	V	Noise Floor								
128	8242	1 MHz	H	Noise Floor								
128	8242	1 MHz	V	Noise Floor								

**A.4 T400 GPRS Mid Ch 850MHz**

EUT: UNDP-1 with T400  
 Mode: GPRS; 2UL slots  
 Band: 850 MHz  
 Channel: Mid - 190  
 Test: Radiated ERP and Emissions

Channel	Freq	Measurement BW	Ant Pol (V/H)	SA reading (dBUV/m)	Signal Generator Reading (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Antenna Gain (dBi)	ERP (dBm)	EIRP (dBm)	Spec (dBm ERP)	Margin
190	836.6	1 MHz	H	126.28	21.71	0.4	5.83	8	27.14	29.31	38.5	-11.36
190	836.6	1 MHz	V	129.43	24.69	0.4	5.83	8	30.12	32.29	38.5	-8.38
190	1673.2	1 MHz	H	53.2	-56.58	-3.5	4.63	6.8	-48.98	-46.28	-13	-35.98
190	1673.2	1 MHz	V	55.2	-53.7	-3.5	4.63	6.8	-46.1	-43.4	-13	-33.1
190	2509.8	1 MHz	H	53	-57.67	-3.7	5.73	7.9	-48.77	-46.07	-13	-35.77
190	2509.8	1 MHz	V	56.85	-49.75	-3.7	5.73	7.9	-40.85	-38.15	-13	-27.85
190	3346.4	1 MHz	H	52	-56.1	-4.2	8.03	10.2	-44.4	-41.7	-13	-31.4
190	3346.4	1 MHz	V	51.5	-55.6	-4.2	8.03	10.2	-43.9	-41.2	-13	-30.9
190	4183	1 MHz	H	Noise Floor								
190	4183	1 MHz	V	Noise Floor								
190	5019.6	1 MHz	H	Noise Floor								
190	5019.6	1 MHz	V	Noise Floor								
190	5856.2	1 MHz	H	Noise Floor								
190	5856.2	1 MHz	V	Noise Floor								
190	6692.8	1 MHz	H	Noise Floor								
190	6692.8	1 MHz	V	Noise Floor								
190	7529.4	1 MHz	H	Noise Floor								
190	7529.4	1 MHz	V	Noise Floor								
190	8366	1 MHz	H	Noise Floor								
190	8366	1 MHz	V	Noise Floor								

### A.5 T400 GPRS High Ch 850MHz

EUT: UNDP-1 with T400  
 Mode: GPRS; 2UL slots  
 Band: 850 MHz  
 Channel: High - 251  
 Test: Radiated ERP and Emissions

Channel	Freq	Measurement BW	Ant Pol (V/H)	SA reading (dBUV/m)	Signal Generator Reading (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Antenna Gain (dBi)	ERP (dBm)	EIRP (dBm)	Spec (dBm ERP)	Margin
251	848.8	1 MHz	H	126.46	24.52	0.4	5.83	8	29.95	32.12	38.5	-8.55
251	848.8	1 MHz	V	128.35	25.6	0.4	5.83	8	31.03	33.2	38.5	-7.47
251	1697.6	1 MHz	H	53.5	-54.8	-3.5	4.63	6.8	-47.2	-44.5	-13	-34.2
251	1697.6	1 MHz	V	57.8	-51.5	-3.5	4.63	6.8	-43.9	-41.2	-13	-30.9
251	2546.4	1 MHz	H	56.22	-54.58	-3.7	5.73	7.9	-45.68	-42.98	-13	-32.68
251	2546.4	1 MHz	V	58.4	-48	-3.7	5.73	7.9	-39.1	-36.4	-13	-26.1
251	3395.2	1 MHz	H	51.85	-57.55	-4.2	8.03	10.2	-45.85	-43.15	-13	-32.85
251	3395.2	1 MHz	V	52.1	-56.34	-4.2	8.03	10.2	-44.64	-41.94	-13	-31.64
251	4244	1 MHz	H	Noise Floor								
251	4244	1 MHz	V	Noise Floor								
251	5092.8	1 MHz	H	Noise Floor								
251	5092.8	1 MHz	V	Noise Floor								
251	5941.6	1 MHz	H	Noise Floor								
251	5941.6	1 MHz	V	Noise Floor								
251	6790.4	1 MHz	H	Noise Floor								
251	6790.4	1 MHz	V	Noise Floor								
251	7639.2	1 MHz	H	Noise Floor								
251	7639.2	1 MHz	V	Noise Floor								
251	8488	1 MHz	H	Noise Floor								
251	8488	1 MHz	V	Noise Floor								



### A.6 T400 GPRS Low Ch 1900MHz

EUT: UNDP-1 with T400  
 Mode: GPRS; 2UL slots  
 Band: 1900 MHz  
 Channel: Low -512  
 Test: Radiated ERP and Emissions

Channel	Freq	Measurement BW	Ant Pol (V/H)	SA reading (dBuV/m)	Signal Generator Reading (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Antenna Gain (dBi)	ERP (dBm)	EIRP (dBm)	Spec (dBm EIRP)	Margin
512	1850.2	1 MHz	H	127.09	20.26	0.6	6.28	8.45	25.41	28.11	33	-4.89
512	1850.2	1 MHz	V	128.42	21.02	0.6	6.28	8.45	26.17	28.87	33	-4.13
512	3700.4	1 MHz	H	51.8	-52.7	-5.4	4.63	6.8	-43.2	-40.5	-13	-27.5
512	3700.4	1 MHz	V	52.3	-56.8	-5.4	4.63	6.8	-47.3	-44.6	-13	-31.6
512	5550.6	1 MHz	H	55.8	-54.7	-6.9	5.73	7.9	-42.6	-39.9	-13	-26.9
512	5550.6	1 MHz	V	56	-56.5	-6.9	5.73	7.9	-44.4	-41.7	-13	-28.7
512	7400.8	1 MHz	H	Noise Floor								
512	7400.8	1 MHz	V	Noise Floor								
512	9251	1 MHz	H	Noise Floor								
512	9251	1 MHz	V	Noise Floor								
512	11101.2	1 MHz	H	Noise Floor								
512	11101.2	1 MHz	V	Noise Floor								
512	12951.4	1 MHz	H	Noise Floor								
512	12951.4	1 MHz	V	Noise Floor								
512	14801.6	1 MHz	H	Noise Floor								
512	14801.6	1 MHz	V	Noise Floor								
512	16651.8	1 MHz	H	Noise Floor								
512	16651.8	1 MHz	V	Noise Floor								
512	18502	1 MHz	H	Noise Floor								
512	18502	1 MHz	V	Noise Floor								

### A.7 T400 GPRS Mid Ch 1900MHz

EUT: UNDP-1 with T400  
 Mode: GPRS; 2UL slots  
 Band: 1900 MHz  
 Channel: Mid 661  
 Test: Radiated ERP and Emissions

Channel	Freq	Measurement BW	Ant Pol (V/H)	SA reading (dBUV/m)	Signal Generator Reading (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Antenna Gain (dBi)	ERP (dBm)	EIRP (dBm)	Spec (dBm EIRP)	Margin
661	1880	1 MHz	H	129.6	22.31	0.6	6.28	8.45	27.46	30.16	33	-2.84
661	1880	1 MHz	V	129.38	21.83	0.6	6.28	8.45	26.98	29.68	33	-3.32
661	3760	1 MHz	H	53.6	-56.4	-5.4	4.63	6.8	-46.9	-44.2	-13	-31.2
661	3760	1 MHz	V	53.9	-57	-5.4	4.63	6.8	-47.5	-44.8	-13	-31.8
661	5640	1 MHz	H	53.9	-58	-6.9	5.73	7.9	-45.9	-43.2	-13	-30.2
661	5640	1 MHz	V	54.6	-55.26	-6.9	5.73	7.9	-43.16	-40.46	-13	-27.46
661	7520	1 MHz	H	Noise Floor								
661	7520	1 MHz	V	Noise Floor								
661	9400	1 MHz	H	Noise Floor								
661	9400	1 MHz	V	Noise Floor								
661	11280	1 MHz	H	Noise Floor								
661	11280	1 MHz	V	Noise Floor								
661	13160	1 MHz	H	Noise Floor								
661	13160	1 MHz	V	Noise Floor								
661	15040	1 MHz	H	Noise Floor								
661	15040	1 MHz	V	Noise Floor								
661	16920	1 MHz	H	Noise Floor								
661	16920	1 MHz	V	Noise Floor								
661	18800	1 MHz	H	Noise Floor								
661	18800	1 MHz	V	Noise Floor								

**A.8 T400 GPRS High Ch 1900MHz**

EUT: UNDP-1 with T400  
 Mode: GPRS; 2UL slots  
 Band: 1900 MHz  
 Channel: High -810  
 Test: Radiated ERP and Emissions

Channel	Freq	Measurement BW	Ant Pol (V/H)	SA reading (dBuV/m)	Signal Generator Reading (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Antenna Gain (dBi)	ERP (dBm)	EIRP (dBm)	Spec (dBm EIRP)	Margin
810	1909.8	1 MHz	H	127.51	22.59	0.6	6.28	8.45	27.74	30.44	33	-2.56
810	1909.8	1 MHz	V	127.75	22.21	0.6	6.28	8.45	27.36	30.06	33	-2.94
810	3819.6	1 MHz	H	54.88	-54.92	-5.4	4.63	6.8	-45.42	-42.72	-13	-29.72
810	3819.6	1 MHz	V	55.91	-54.89	-5.4	4.63	6.8	-45.39	-42.69	-13	-29.69
810	5729.4	1 MHz	H	55.66	-54.04	-6.9	5.73	7.9	-41.94	-39.24	-13	-26.24
810	5729.4	1 MHz	V	56.02	-55.88	-6.9	5.73	7.9	-43.78	-41.08	-13	-28.08
810	7639.2	1 MHz	H	Noise Floor					-2.7			
810	7639.2	1 MHz	V	Noise Floor					-2.7			
810	9549	1 MHz	H	Noise Floor					-2.7			
810	9549	1 MHz	V	Noise Floor					-2.7			
810	11458.8	1 MHz	H	Noise Floor					-2.7			
810	11458.8	1 MHz	V	Noise Floor					-2.7			
810	13368.6	1 MHz	H	Noise Floor					-2.7			
810	13368.6	1 MHz	V	Noise Floor					-2.7			
810	15278.4	1 MHz	H	Noise Floor					-2.7			
810	15278.4	1 MHz	V	Noise Floor					-2.7			
810	17188.2	1 MHz	H	Noise Floor					-2.7			
810	17188.2	1 MHz	V	Noise Floor					-2.7			
810	19098	1 MHz	H	Noise Floor					-2.7			
810	19098	1 MHz	V	Noise Floor					-2.7			

### A.9 T500 GPRS Low Ch 850MHz

EUT: UNDP-1 with T5400  
 Mode: GPRS; 2UL slots  
 Band: 850 MHz  
 Channel: Low – ch 128  
 Test: Radiated ERP and Emissions

Channel	Freq	Measurement BW	Ant Pol (V/H)	SA reading (dBUV/m)	Signal Generator Reading (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Antenna Gain (dBi)	ERP (dBm)	EIRP (dBm)	Spec (dBm ERP)	Margin
128	824.2	1 MHz	H	124.28	18.57	0.4	5.83	8	24	26.17	38.5	-14.5
128	824.2	1 MHz	V	126.61	22.2	0.4	5.83	8	27.63	29.8	38.5	-10.87
128	1648.4	1 MHz	H	65.24	-43.26	-3.5	4.63	6.8	-35.13	-32.96	-13	-22.13
128	1648.4	1 MHz	V	66.19	-41.81	-3.5	4.63	6.8	-33.68	-31.51	-13	-20.68
128	2472.6	1 MHz	H	65.2	-46.31	-3.7	5.73	7.9	-36.88	-34.71	-13	-23.88
128	2472.6	1 MHz	V	69.5	-46.38	-3.7	5.73	7.9	-36.95	-34.78	-13	-23.95
128	3296.8	1 MHz	H	49.4	-60.8	-4.2	8.03	10.2	-48.57	-46.4	-13	-35.57
128	3296.8	1 MHz	V	51.3	-58.1	-4.2	8.03	10.2	-45.87	-43.7	-13	-32.87
128	4121	1 MHz	H	Noise Floor								
128	4121	1 MHz	V	Noise Floor								
128	4945.2	1 MHz	H	Noise Floor								
128	4945.2	1 MHz	V	Noise Floor								
128	5769.4	1 MHz	H	Noise Floor								
128	5769.4	1 MHz	V	Noise Floor								
128	6593.6	1 MHz	H	Noise Floor								
128	6593.6	1 MHz	V	Noise Floor								
128	7417.8	1 MHz	H	Noise Floor								
128	7417.8	1 MHz	V	Noise Floor								
128	8242	1 MHz	H	Noise Floor								
128	8242	1 MHz	V	Noise Floor								

### A.10 T500 GPRS Mid Ch 850MHz

EUT: UNDP-1 with T500  
 Mode: GPRS; 2UL slots  
 Band: 850 MHz  
 Channel: Mid – Ch 190  
 Test: Radiated ERP and Emissions

Channel	Freq	Measurement BW	Ant Pol (V/H)	SA reading (dBuV/m)	Signal Generator Reading (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Antenna Gain (dBi)	ERP (dBm)	EIRP (dBm)	Spec (dBm ERP)	Margin
190	836.6	1 MHz	H	123.92	19.35	0.4	5.83	8	24.78	26.95	38.5	-13.72
190	836.6	1 MHz	V	126.87	22.13	0.4	5.83	8	27.56	29.73	38.5	-10.94
190	1673.2	1 MHz	H	60.7	-49.08	-3.5	4.63	6.8	-40.95	-38.78	-13	-27.95
190	1673.2	1 MHz	V	67.09	-41.81	-3.5	4.63	6.8	-33.68	-31.51	-13	-20.68
190	2509.8	1 MHz	H	65.32	-45.35	-3.7	5.73	7.9	-35.92	-33.75	-13	-22.92
190	2509.8	1 MHz	V	66.25	-40.35	-3.7	5.73	7.9	-30.92	-28.75	-13	-17.92
190	3346.4	1MHz	H	46.65	-61.45	-4.2	8.03	10.2	-49.22	-47.05	-13	-36.22
190	3346.4	1MHz	V	47.25	-59.85	-4.2	8.03	10.2	-47.62	-45.45	-13	-34.62
190	4183	1MHz	H	Noise Floor								
190	4183	1MHz	V	Noise Floor								
190	5019.6	1MHz	H	Noise Floor								
190	5019.6	1MHz	V	Noise Floor								
190	5856.2	1MHz	H	Noise Floor								
190	5856.2	1MHz	V	Noise Floor								
190	6692.8	1MHz	H	Noise Floor								
190	6692.8	1MHz	V	Noise Floor								
190	7529.4	1MHz	H	Noise Floor								
190	7529.4	1MHz	V	Noise Floor								
190	8366	1MHz	H	Noise Floor								
190	8366	1MHz	V	Noise Floor								

**A.11 T500 GPRS High Ch 850MHz**

EUT: UNDP-1 with T500  
 Mode: GPRS; 2UL slots  
 Band: 850 MHz  
 Channel: High – Ch 251  
 Test: Radiated ERP and Emissions

Channel	Freq	Measurement BW	Ant Pol (V/H)	SA reading (dBUV/m)	Signal Generator Reading (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Antenna Gain (dBi)	ERP (dBm)	EIRP (dBm)	Spec (dBm ERP)	Margin
251	848.8	1 MHz	H	124.31	22.37	0.4	5.83	8	27.8	29.97	38.5	-10.7
251	848.8	1 MHz	V	126.95	24.2	0.4	5.83	8	29.63	31.8	38.5	-8.87
251	1697.6	1 MHz	H	57.8	-50.5	-3.5	4.63	6.8	-42.37	-40.2	-13	-29.37
251	1697.6	1 MHz	V	68.08	-41.22	-3.5	4.63	6.8	-33.09	-30.92	-13	-20.09
251	2546.4	1 MHz	H	62.3	-48.5	-3.7	5.73	7.9	-39.07	-36.9	-13	-26.07
251	2546.4	1 MHz	V	65.5	-40.9	-3.7	5.73	7.9	-31.47	-29.3	-13	-18.47
251	3395.2	1 MHz	H	52.4	-57	-4.2	8.03	10.2	-44.77	-42.6	-13	-31.77
251	3395.2	1 MHz	V	51.9	-56.54	-4.2	8.03	10.2	-44.31	-42.14	-13	-31.31
251	4244	1 MHz	H	Noise Floor								
251	4244	1 MHz	V	Noise Floor								
251	5092.8	1 MHz	H	Noise Floor								
251	5092.8	1 MHz	V	Noise Floor								
251	5941.6	1 MHz	H	Noise Floor								
251	5941.6	1 MHz	V	Noise Floor								
251	6790.4	1 MHz	H	Noise Floor								
251	6790.4	1 MHz	V	Noise Floor								
251	7639.2	1 MHz	H	Noise Floor								
251	7639.2	1 MHz	V	Noise Floor								
251	8488	1 MHz	H	Noise Floor								
251	8488	1 MHz	V	Noise Floor								

**A.12 T500 GPRS Low Ch 1900MHz**

EUT: UNDP-1 with T500  
 Mode: GPRS; 2UL slots  
 Band: 1900 MHz  
 Channel: Low – Ch 512  
 Test: Radiated ERP and Emissions

Channel	Freq	Measurement BW	Ant Pol (V/H)	SA reading (dBuV/m)	Signal Generator Reading (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Antenna Gain (dBi)	ERP (dBm)	EIRP (dBm)	Spec (dBm EIRP)	Margin
512	1850.2	1 MHz	H	126.42	19.59	0.6	6.28	8.45	25.27	27.44	33	-5.56
512	1850.2	1 MHz	V	128.38	20.98	0.6	6.28	8.45	26.66	28.83	33	-4.17
512	3700.4	1 MHz	H	52.45	-52.05	-5.4	4.63	6.8	-42.02	-39.85	-13	-26.85
512	3700.4	1 MHz	V	52.77	-56.33	-5.4	4.63	6.8	-46.3	-44.13	-13	-31.13
512	5550.6	1 MHz	H	57.6	-52.9	-6.9	5.73	7.9	-40.27	-38.1	-13	-25.1
512	5550.6	1 MHz	V	56.76	-55.74	-6.9	5.73	7.9	-43.11	-40.94	-13	-27.94
512	7400.8	1 MHz	H	Noise Floor								
512	7400.8	1 MHz	V	Noise Floor								
512	9251	1 MHz	H	Noise Floor								
512	9251	1 MHz	V	Noise Floor								
512	11101.2	1 MHz	H	Noise Floor								
512	11101.2	1 MHz	V	Noise Floor								
512	12951.4	1 MHz	H	Noise Floor								
512	12951.4	1 MHz	V	Noise Floor								
512	14801.6	1 MHz	H	Noise Floor								
512	14801.6	1 MHz	V	Noise Floor								
512	16651.8	1 MHz	H	Noise Floor								
512	16651.8	1 MHz	V	Noise Floor								
512	18502	1 MHz	H	Noise Floor								
512	18502	1 MHz	V	Noise Floor								

### A.13 T500 GPRS Mid Ch 1900MHz

EUT: UNDP-1 with T500  
 Mode: GPRS; 2UL slots  
 Band: 1900 MHz  
 Channel: Mid – Ch 661  
 Test: Radiated ERP and Emissions

Channel	Freq	Measurement BW	Ant Pol (V/H)	SA reading (dBuV/m)	Signal Generator Reading (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Antenna Gain (dBi)	ERP (dBm)	EIRP (dBm)	Spec (dBm EIRP)	Margin
661	1880	1 MHz	H	126	18.71	0.6	6.28	8.45	24.39	26.56	33	-6.44
661	1880	1 MHz	V	128.04	20.49	0.6	6.28	8.45	26.17	28.34	33	-4.66
661	3760	1 MHz	H	53	-57	-5.4	4.63	6.8	-46.97	-44.8	-13	-31.8
661	3760	1 MHz	V	53.3	-57.6	-5.4	4.63	6.8	-47.57	-45.4	-13	-32.4
661	5640	1 MHz	H	55	-56.9	-6.9	5.73	7.9	-44.27	-42.1	-13	-29.1
661	5640	1 MHz	V	56.15	-53.71	-6.9	5.73	7.9	-41.08	-38.91	-13	-25.91
661	7520	1 MHz	H	Noise Floor								
661	7520	1 MHz	V	Noise Floor								
661	9400	1 MHz	H	Noise Floor								
661	9400	1 MHz	V	Noise Floor								
661	11280	1 MHz	H	Noise Floor								
661	11280	1 MHz	V	Noise Floor								
661	13160	1 MHz	H	Noise Floor								
661	13160	1 MHz	V	Noise Floor								
661	15040	1 MHz	H	Noise Floor								
661	15040	1 MHz	V	Noise Floor								
661	16920	1 MHz	H	Noise Floor								
661	16920	1 MHz	V	Noise Floor								
661	18800	1 MHz	H	Noise Floor								
661	18800	1 MHz	V	Noise Floor								



### A.14 T500 GPRS High Ch 1900MHz

EUT: UNDP-1 with T500  
 Mode: GPRS; 2UL slots  
 Band: 1900 MHz  
 Channel: High – Ch 810  
 Test: Radiated ERP and Emissions

Channel	Freq	Measurement BW	Ant Pol (V/H)	SA reading (dBuV/m)	Signal Generator Reading (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Antenna Gain (dBi)	ERP (dBm)	EIRP (dBm)	Spec (dBm EIRP)	Margin
810	1909.8	1 MHz	H	124.29	19.37	0.6	6.28	8.45	25.05	27.22	33	-5.78
810	1909.8	1 MHz	V	127.77	22.23	0.6	6.28	8.45	27.91	30.08	33	-2.92
810	3819.6	1 MHz	H	55	-54.8	-5.4	5.73	7.9	-43.67	-41.5	-13	-28.5
810	3819.6	1 MHz	V	55.05	-55.75	-5.4	5.73	7.9	-44.62	-42.45	-13	-29.45
810	5729.4	1 MHz	H	55.7	-54	-6.9	4.63	6.8	-42.47	-40.3	-13	-27.3
810	5729.4	1 MHz	V	54	-57.9	-6.9	4.63	6.8	-46.37	-44.2	-13	-31.2
810	7639.2	1 MHz	H	60.7	-50.2	-6.9	5.73	7.9	-37.57	-35.4	-13	-22.4
810	7639.2	1 MHz	V	61.82	-49.58	-6.9	5.73	7.9	-36.95	-34.78	-13	-21.78
810	9549	1 MHz	H	Noise Floor								
810	9549	1 MHz	V	Noise Floor								
810	11458.8	1 MHz	H	Noise Floor								
810	11458.8	1 MHz	V	Noise Floor								
810	13368.6	1 MHz	H	Noise Floor								
810	13368.6	1 MHz	V	Noise Floor								
810	15278.4	1 MHz	H	Noise Floor								
810	15278.4	1 MHz	V	Noise Floor								
810	17188.2	1 MHz	H	Noise Floor								
810	17188.2	1 MHz	V	Noise Floor								
810	19098	1 MHz	H	Noise Floor								
810	19098	1 MHz	V	Noise Floor								

This Page Intentionally Left Blank

## **Appendix B Base Station Emulator Settings and Test Procedures**

---

### **B.1 For CDMA2000 1x/EVDO**

Use CDMA2000 Rev 6 protocol in the call box.

- 1) Test for Reverse/Forward TCH RC1, Reverse/Forward TCH RC2, and RC3 Reverse FCH and demodulation of RC 3, 4 or 5.
  - a. Set up a call using Fundamental Channel Test Mode 1 (RC1, SO 2) with 9600 bps data rate only.
  - b. As per C.S0011 or TIA/EIA-98-F Table 4.4.5.2-1, set the test parameters as shown in Table 5-2.
  - c. Send continuously '0' power control bits to the UNDP-1.
  - d. Measure the output power at UNDP-1 antenna connector as recorded on the power meter with values corrected for cables losses.
  - e. Repeat step b through d for Fundamental Channel Test Mode:
    - i. RC1, SO55
    - ii. RC2, SO9
    - iii. RC2, SO55
    - iv. RC3, SO55
- 2) Test for RC 3 Reverse FCH, RC3 Reverse SCH0 and demodulation of RC 3, 4 or 5.
  - a. Set up a call using Supplemental Channel Test Mode 3 (RC 3, SO 32) with 9600 bps Fundamental Channel and 9600 bps SCH0 data rate.
  - b. As per C.S0011 or TIA/EIA-98-F Table 4.4.5.2-2, set the test parameters as shown in Table 5-3.
  - c. Send alternating '0' and '1' power control bit to the UNDP-1
  - d. Determine the active channel configuration. If the desired channel configuration is not the active channel configuration, increase  $\hat{I}_or$  by 1 dB and repeat the verification. Repeat this step until the desired channel configuration becomes active.
  - e. Measure the output power at the UNDP-1 antenna connector.
  - f. Decrease  $\hat{I}_or$  by 0.5 dB.
  - g. Determine the active channel configuration. If the active channel configuration is the desired channel configuration, measure the output power at the UNDP-1 antenna connector.
  - h. Repeat step f and g until the output power no longer increases or the desired channel configuration is no longer active. Record the highest output power achieved with the desired channel configuration active.
  - i. Repeat step a through h ten times and average the result.
- 3) Test for RC3 Reverse FCH, RC 3 DCCH and demodulation of RC3, 4 or 5.
  - a. Use the same procedure as described in 2).

**Table 5-2 Parameters for Max. Power with a single traffic code channel, SR1**

Parameter	Units	Value
$I_{or}$	dBm/1.23 MHz	-104
$\frac{\text{Pilot } E_c}{I_{or}}$	dB	-7
$\frac{\text{Traffic } E_c}{I_{or}}$	dB	-7.4

**Table 5-3 Parameters for Max. Power with multiple traffic code channel, SR1**

Parameter	Units	Value
$\frac{\text{Pilot } E_c}{I_{or}}$	dB	-7
$\frac{\text{Traffic } E_c}{I_{or}}$	dB	-7.4

1xEV-DO

1) Use 1xEV-DO Rel 0 protocol in the call box.

a. RTAP

- Select Test Application Protocol to RTAP
- Set RTAP Rate to 9.6 kbps
- Generator Info -> Termination Parameters -> Max Forward Packet Duration -> 16 Slots
- Set  $I_{or}$  to -60 dBm/1.23 MHz
- Send continuously '0' power control bits
- Measure the power at UNDP-1 antenna connector
- Repeat above steps for RTAP Rate = 19.2 kbps, 38.4 kbps, 76.8 kbps and 153.6 kbps respectively

2) Use 1xEV-DO Rev A protocol in the call box.

a. RETAP

- Select Test Application Protocol to RETAP
- F-Traffic Format -> 4 (1024, 2, 128) Canonical (307.2k, QPSK)
- Set R-Data Pkt Size to 128
- Protocol Subtype Config -> Release A Physical Layer Subtype -> Subtype 2  
->PL Subtype 2 Access Channel MAC Subtype -> Default (Subtype 0)
- Generator Info -> Termination Parameters -> Max Forward Packet Duration -> 16 Slots  
->ACK R-Data After -> Subpacket 0 (All ACK)
- Set  $I_{or}$  to -60 dBm/1.23 MHz
- Send continuously '0' power control bits

- Measure the power at UNDP-1 antenna connector
- Repeat above steps for R-Data Pkt Size = 256, 512, 768, 1024, 1536, 2048, 3072, 4096, 6144, 8192, 12288 respectively.
- Repeat above steps for R-Data Pkt Size = 256, 512, 768, 1024, 1536, 2048, 3072, 4096, 6144, 8192, 12288 respectively.

## B.2 For WCDMA/HSDPA/HSUPA

Configure the call box to support all WCDMA tests in respect to the 3GPP 34.121 (listed in Table 5-4).

### Rel99

- 1) Set a Test Mode 1 loop back with a 12.2kbps Reference Measurement Channel (RMC)
- 2) Set and send continuously Up power control commands to the UNDP-1

### HSDPA Rel 6

- 1) Establish a Test Mode 1 look back with both 1 12.2kbps RMC channel and a H-Set1 Fixed Reference Channel (FRC). With the 8820 this is accomplished by setting the signal Channel Coding to “Fixed Reference Channel” and configuring for HSET-1 QKSP.
- 2) Set beta values and HSDPA settings for HSDPA Subtest1 according to Table 5-4
- 3) Send continuously Up power control commands to the UNDP-1
- 4) Measure the power at the UNDP-1 antenna connector using the power meter with modulated average detector
- 5) Repeat the measurement for the HSDPA Subtest2, 3 and 4 as given in Table 5-4

### HSUPA Rel 6

- 1) Use UL RMC 12.2kbps and FRC H-Set1 QPSK, Test Mode 1 loop back. With the 8820 this is accomplished by setting the signal Channel Coding to “E-DCH Test Channel” and configuring the equipment category to Cat6\_10ms.
- 2) Set the Absolute Grant for HSUPA Subtest1 according to Table 5-4
- 3) Set the UNDP power to be at least 5dB lower than the Maximum output power
- 4) Send power control bits to give one TPC\_cmd = +1 command to the UNDP. If UNDP doesn't send any E-DPCH data with decreased E-TFCI within 500ms, then repeat this process until the decreased E-TFCI is reported.
- 5) Confirm that the E-TFCI transmitted by the UNDP is equal to the target E-TFCI in Table 5-4. If the E-TFCI transmitted by the UNDP is not equal to the target E-TFCI, then send power control bits to give one TPC\_cmd = -1 command to the UE. If UE sends any E-DPCH data with decreased E-TFCI within 500 ms, send new power control bits to give one TPC\_cmd = -1 command to the UE. Then confirm that the E-TFCI transmitted by the UE is equal to the target E-TFCI in Table 5-4. If the E-TFCI transmitted by the UE is not equal to the target E-TFCI, then fail the UE
- 6) Repeat the measurement for the HSUPA Subtest2, 3, 4 and 5 as given in Table 5-4

**Table 5-4 3GPP Rel99/HSPA Subtest Settings**

	Mode	Rel99	Rel6 HSDPA	Rel6 HSDPA	Rel6 HSDPA	Rel6 HSDPA	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA
	Subtest	-	1	2	3	4	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1	Test Mode 1				Test Mode 1				
	Rel99 RMC	12.2kbps RMC	12.2kbps RMC				12.2kbps RMC				
	HSDPA FRC	Not Applicable	H-Set1				H-Set1				
	HSUPA Test	Not Applicable	Not Applicable				HSUPA Loopback				
	Power Control Algorithm	Algorithm2	Algorithm2				Algorithm2				
	$\beta_c$	Not Applicable	2/15	12/15	15/15	15/15	11/15	6/15	15/15	2/15	15/15
	$\beta_d$	Not Applicable	15/15	15/15	8/15	4/15	15/15	15/15	9/15	15/15	15/15
	$\beta_{ec}$	Not Applicable	-	-	-	-	209/225	12/15	30/15	2/15	24/15
	$\beta_c/\beta_d$	8/15	2/15	12/15	15/8	15/4	11/15	6/15	15/9	2/15	15/15
	$\beta_{hs}$	Not Applicable	4/15	24/15	30/15	30/15	22/15	12/15	30/15	4/15	30/15
$\beta_{ed}$	Not Applicable	Not Applicable				1309/225	94/75	47/15	47/15	56/75	134/15
HSDPA Specific Settings	DACK	Not Applicable	8				8				
	DNAK	Not Applicable	8				8				
	DCQI	Not Applicable	8				8				
	Ack-Nack repetition factor	Not Applicable	3				3				
	CQI Feedback (Table 5.2B.4)	Not Applicable	4ms				4ms				
	CQI Repetition Factor (Table 5.2B.4)	Not Applicable	2				2				
	A <sub>hs</sub> = $\beta_{hs}/\beta_c$	Not Applicable	30/15				30/15				
HSUPA Specific Settings	D E-DPCCH	Not Applicable	Not Applicable				6	8	8	5	7
	DHARQ	Not Applicable	Not Applicable				0	0	0	0	0
	AG Index	Not Applicable	Not Applicable				20	12	15	17	21
	ETFCI (from 34.121 Table C.11.1.3)	Not Applicable	Not Applicable				75	67	92	71	81
	Associated Max UL Data Rate kbps	Not Applicable	Not Applicable				242.1	174.9	482.8	205.8	308.9
	Reference E_TFCIs						E-TFCI 11			E-TFCI 11	
		Not Applicable	Not Applicable				E-TFCI PO 4			E-TFCI PO 4	
						E-TFCI 67	E-TFCI		E-TFCI 67		
						E-TFCI PO 18	11		E-TFCI PO 18		
						E-TFCI 71	E-TFCI		E-TFCI 71		
						E-TFCI PO 23	PO 4		E-TFCI PO 23		
						E-TFCI 75	E-TFCI		E-TFCI 75		
						E-TFCI PO 26	92		E-TFCI PO 26		
						E-TFCI 81	E-TFCI		E-TFCI 81		
						E-TFCI PO 27	PO 18		E-TFCI PO 27		

### B.3 For GSM/GPRS/EGDE

- Configure the call box to support GPRS test.
- Configure for desired number of uplink transmit lots.
- Set MS\_TX level to 0 (850 MHz) or 2 (1900MHz) to configure EUT to transmit at maximum output power.