

# ***FCC Part 74 Subpart H***

## ***EMI TEST REPORT***

*of*

E.U.T. : Wireless Bodypack Transmitter  
Microphone

FCC ID. : JEBUT-18

MODEL : UT-18

Working Frequency : 790MHz-806MHz

*for*

APPLICANT : WA GOL INDUSTRIAL CO., LTD.

ADDRESS : No. 85 Chang Hsing First Street, Tai-tzu Village,  
Jen-Te Hsian, Tainan Hsien, Taiwan, R.O.C.

Test Performed by

**ELECTRONICS TESTING CENTER, TAIWAN**

NO. 34, LIN 5, DING FU TSUN, LINKOU HSIANG  
TAIPEI HSIEN, TAIWAN, R.O.C.

Tel:(02)226023052      Fax:(02)26010910  
<http://www/etc.org.tw> ; e-mail : etcemi@seed.net.tw

Report Number : ET92R-05-064-02

# TEST REPORT CIRTIFICATION

Applicant : WA GOL INDUSTRIAL CO., LTD.  
No. 85 Chang Hsing First Street, Tai-tzu Village, Jen-Te Hsian, Tainan  
Hsien, Taiwan, R.O.C.

Manufacturer : WA GOL INDUSTRIAL CO., LTD.  
No. 85 Chang Hsing First Street, Tai-tzu Village, Jen-Te Hsian, Tainan  
Hsien, Taiwan, R.O.C.

Description of EUT :  
a) Type of EUT : Wireless Bodypack Transmitter Microphone  
b) Trade Name : MASCOT  
c) Model No. : UT-18  
d) FCC ID : JEBUT-18  
e) Working Frequency : 790MHz-806MHz  
f) Power Supply : DC 3V Batteries

Regulation Applied : FCC Rules and Regulations Part 74 Subpart H (2001)

I HEREBY CERTIFY THAT; The data shown in this report were made in accordance with the procedures given in ANSI C63.4 and the energy emitted by the device was founded to be within the limits applicable. I assume full responsibility for accuracy and completeness of these data.

Issued Date : May 28, 2003

Test Engineer : Vincent Chang  
( Vincent Chang )

Approve & Authorized Signer : Will Yauo  
Will Yauo, Manager  
EMC Dept. II of ELECTRONICS  
TESTING CENTER, TAIWAN

<i>Table of Contents</i>	<i>Page</i>
<b>1. GENERAL INFORMATION .....</b>	<b>1</b>
1.1 PRODUCT DESCRIPTION.....	1
1.2 CHARACTERISTICS OF DEVICE:.....	1
1.3 TEST METHODOLOGY .....	1
1.4 TEST FACILITY.....	1
<b>2. REQUIREMENTS OF PROVISIONS .....</b>	<b>2</b>
2.1 DEFINITION .....	2
2.2 FREQUENCIES AVAILABLE .....	2
2.3 REQUIREMENTS FOR RADIO EQUIPMENT ON CERTIFICATION .....	2
2.4 LABELING REQUIREMENT .....	3
<b>3. OUTPUT POWER MEASUREMENT.....</b>	<b>4</b>
3.1 PROVISION APPLICABLE .....	4
3.2 MEASUREMENT PROCEDURE .....	4
3.3 TEST DATA.....	6
3.4 RESULT CALCULATION.....	7
3.5 TEST EQUIPMENT .....	7
<b>4. MODULATION CHARACTERISTICS .....</b>	<b>8</b>
4.1 PROVISIONS APPLICABLE .....	8
4.2 MEASUREMENT METHOD .....	8
4.3 MEASUREMENT INSTRUMENT .....	9
4.4 MEASUREMENT RESULT.....	9
<b>5. OCCUPIED BANDWIDTH OF EMISSION.....</b>	<b>11</b>
5.1 PROVISIONS APPLICABLE .....	11
5.2 MEASUREMENT METHOD .....	11
5.3 OCCUPIED BANDWIDTH TEST EQUIPMENT .....	11
5.4 BANDWIDTH MEASURED.....	12
5.4.1 INPUT LEVEL DERIVED .....	12
5.4.2 OCCUPIED BANDWIDTH PLOTTED.....	12
<b>6. FIELD STRENGTH OF EMISSION.....</b>	<b>13</b>
6.1 PROVISIONS APPLICABLE .....	13
6.2 MEASUREMENT PROCEDURE .....	13
6.3 MEASURING INSTRUMENT .....	14
6.4 MEASURING DATA.....	15
6.5 RADIATED MEASUREMENT PHOTOS.....	18
<b>7. FREQUENCY STABILITY MEASUREMENT.....</b>	<b>19</b>
7.1 PROVISIONS APPLICABLE .....	19
7.2 MEASUREMENT PROCEDURE .....	19
7.3 MEASUREMENT INSTRUMENT .....	20
7.4 MEASUREMENT DATA.....	21
<b>8 CONDUCTED EMISSION MEASUREMENT.....</b>	<b>24</b>
8.1 STANDARD APPLICABLE.....	24
<b>APPENDIX 1 : OCCUPIED EMISSION BANDWIDTH PLOTTED DATA .....</b>	<b>25</b>
<b>APPENDIX 2 : EMISSION MASK PLOTTED DATA.....</b>	<b>29</b>

## 1. GENERAL INFORMATION

### 1.1 Product Description

a) Type of EUT	: Wireless Bodypack Transmitter Microphone
b) Trade Name	: MASCOT
c) Model No.	: UT-18
d) FCC ID	: JEBUT-18
e) Working Frequency	: 790MHz-806MHz
f) Power Supply	: DC 3V Batteries

### 1.2 Characteristics of Device:

1. Operating Frequency: 790MHz -806MHz
2. The bodypack transmitter operates in UHF band frequency with PLL synthesized control. UHF 64 preprogrammed selectable frequencies to avoid interference. Uni-directional condenser capsules with different characters for various choices. Use 1.5V x 2 AA size dry or rechargeable batteries for low operating cost.
3. The emission designator is 161KF3E. The calculation is (2M+2DK), K=1 and (2 x 32.768 + 2 x 48) = 161.5kHz, so the emission designator is 161KF3E.

### 1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures in chapter 13 of ANSI C63.4. and section 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, and 2.1055 of Part 2 of CFR 47

### 1.4 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the roof top of Building at No. 34, Lin 5, Ding Fu Tsun, Linkou Hsiang, Taipei Hsien, Taiwan, R.O.C.

This site has been fully described in a report submitted to your office, and accepted in a letter dated Feb. 10, 2000.

## 2. REQUIREMENTS OF PROVISIONS

### 2.1 Definition

Intentional radiator:

A device that intentionally generates and emits radio frequency energy by radiation or induction.

### 2.2 Frequencies Available

According to sec. 74.802 of Part 74, the following frequencies are available for low power auxiliary station :

Frequencies (MHz)	
26.100-26.480	455.000-456.000
54.000-72.000	470.000-488.000
76.000-88.000	488.000-494.000
161.625-161.775	614.000-806.000
174.000-216.000	450.000-451.000
944.000-952.000	

### 2.3 Requirements for Radio Equipment on Certification

#### (1) RF Output Power

For transmitters, the power output shall be measured at the RF output terminals.

#### (2) Modulation Characteristics

For Voice Modulated Communication Equipment, a curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted.

#### (3) Occupied Bandwidth

For radiotelephone transmitter, other than single sideband or independent sideband transmitter, when modulated by a 2.5kHz tone at an input level 16 dB greater than that necessary to produce 50 percent modulation.

#### (4) Spurious Emissions at Antenna Terminals

The radio frequency voltage or power generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminal when properly loaded with a suitable artificial antenna.

**(5) Field Strength of Spurious Emissions**

Measurements shall be made to detect spurious emission that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal condition of installation and operation.

**(6) Frequencies Tolerance**

- a) The frequency stability shall be measured with variation of ambient temperature.
- b) The frequency stability shall be measured with variation of primary supply voltage.

**2.4 Labeling Requirement**

Each equipment for which a type acceptance application is filed on or after May 1,1981, shall bear an identification plate or label pursuant to § 2.925 ( Identification of equipment ) and § 2.926 ( FCC identifier ) .

### 3. OUTPUT POWER MEASUREMENT

#### 3.1 Provision Applicable

According to § 74.861(e)(1)(ii), the output power shall not exceed 250 milliwatts.

#### 3.2 Measurement Procedure

1. Setup the configuration per figure 1 and 2 for frequencies measured below and above 1 GHz respectively, adjusting the input voltage to produce the maximum power as measured in chapter 3.
2. Adjust the analyzer for each frequency measured in chapter 6 on a 1 MHz frequency span and 1MHz resolution bandwidth.
3. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0° to 360°, and record the highest value indicated on spectrum analyzer as reference value.
4. Repeat step 3 until all frequencies need to be measured were complete.
5. Repeat step 4 with search antenna in vertical polarized orientations.
6. Replace the EUT with a tuned dipole antenna (horn antenna for above 1 GHz) relative to each frequency in horizontally polarized orientation and as the same polarized orientation with search antenna. Connect the tuned dipole antenna to a standard signal generator (SG) via a low loss cable. Power on the SG and tune the right frequency in measuring as well as set SG at a appreciated output level. Rise and lower the search antenna to get the highest value on spectrum analyzer, and then hold this position. Adjust the SG output to get a identical value derived from step 3 on spectrum analyzer. Record this value for result calculated.
7. Repeat step 6 until all frequencies need to be measured were complete.
8. Repeat step 7 with both dipole antenna (horn antenna for above 1 GHz) and search antenna in vertical polarized orientations.

Figure 2 : Frequencies measured below 1 GHz configuration


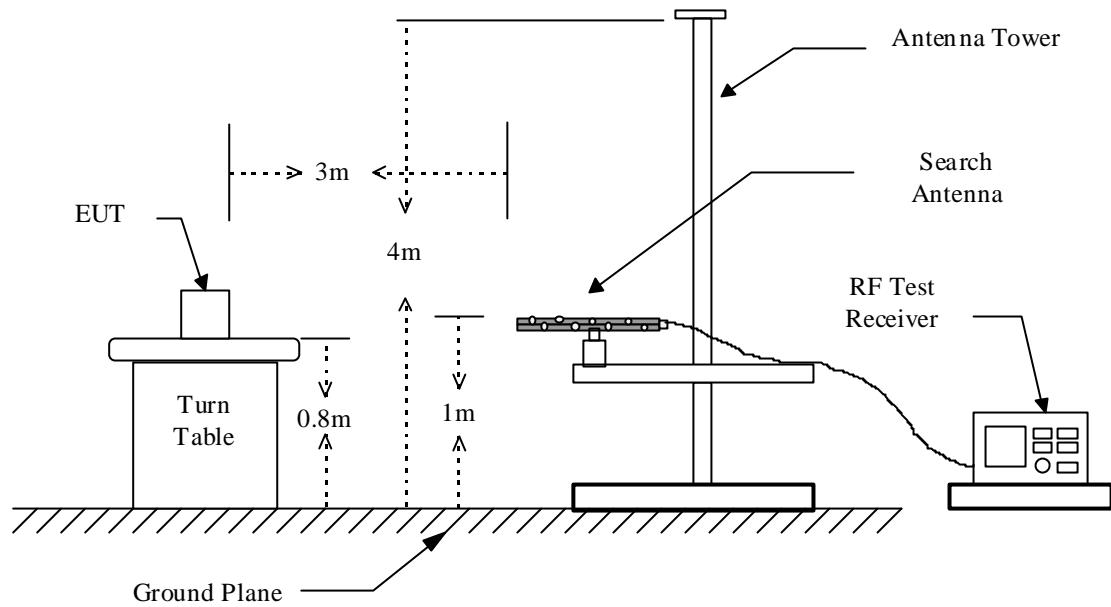


Figure 1 : Frequencies measured above 1 GHz configuration

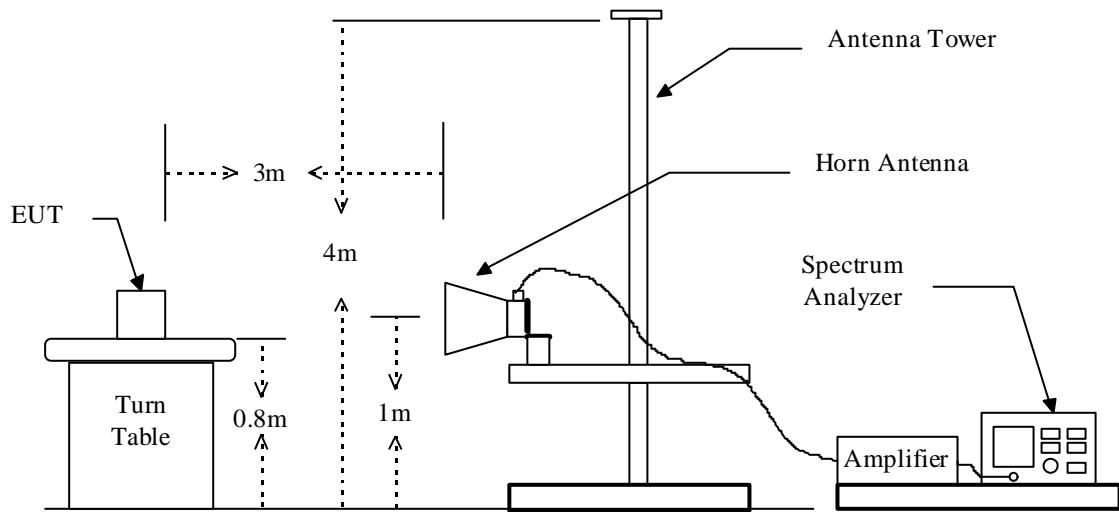

### 3.3 Test Data

#### A. Channel Low (ERP)

Operated mode : 790.371 MHz      Test Date : May 22, 2003  
 Temperature : 25      Humidity : 65 %

Frequency (MHz)	Meter Reading (dB $\mu$ V/m)	SG Reading (dBm)	Cable Loss (dB)	Antenna Gain	Result (dBm)	Output Power (mW)	Limit (mW)
790.371	71.6	4.1	2.6	---	1.5	1.413	250.0

#### B. Channel Mid (ERP)

Operated mode : 797.706 MHz      Test Date : May 22, 2003  
 Temperature : 25      Humidity : 65 %

Frequency (MHz)	Meter Reading (dB $\mu$ V/m)	SG Reading (dBm)	Cable Loss (dB)	Antenna Gain	Result (dBm)	Output Power (mW)	Limit (mW)
797.706	71.8	4.2	2.6	---	1.6	1.445	250.0

#### C. Channel High (ERP)

Operated mode : 805.730 MHz      Test Date : May 22, 2003  
 Temperature : 25      Humidity : 65 %

Frequency (MHz)	Meter Reading (dB $\mu$ V/m)	SG Reading (dBm)	Cable Loss (dB)	Antenna Gain	Result (dBm)	Output Power (mW)	Limit (mW)
805.730	71.1	3.5	2.6	---	0.9	1.210	250.0

**Note: For measured frequency below 1GHz, a tuned dipole antenna is used.**

### 3.4 Result Calculation

Result calculation is as following :

Result = SG Reading + Cable Loss + Antenna Gain Corrected

Antenna Gain Corrected : is used for antenna other than dipole to convert radiated power to ERP.

$$mW = \log^{-1}\left[\frac{\text{Result(dBm)}}{10}\right]$$

### 3.5 Test Equipment

Equipment	Manufacturer	Model No.	Next Cal. Date
EMI Test Receiver	R&S	ESBI	05/25/2003
Plotter	HP	7440A	N/A

## 4. MODULATION CHARACTERISTICS

### 4.1 Provisions Applicable

According to § 2.1047 (a), for Voice Modulated Communication Equipment, the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be measured.

### 4.2 Measurement Method

#### A) Frequency response of audio circuits

1. Position the EUT as shown in figure 3.
2. Vary the modulating frequency from 100 Hz to 5000 Hz with varying the input voltage from 0V to maximum permitted input voltage, and observe the change in output.


#### B) Modulation Limit

1. Position the EUT as shown in figure 3, adjust the audio input frequency to 100 Hz and the input level from 0V to maximum permitted input voltage with recording each carrier frequency deviation responding to respective input level.
2. Repeat step 1 with changing the input frequency for 200, 500, 1000, 3000, and 5000 Hz in sequence.

#### C) Frequency response of all circuits

1. Position the EUT as shown in figure 3.
2. Vary the modulating frequency from 100 Hz to 15000 Hz with constant input voltage (derived from 5.4(a) of this test report), and observe the change in output.

Figure 3 : Modulation characteristic measurement configuration

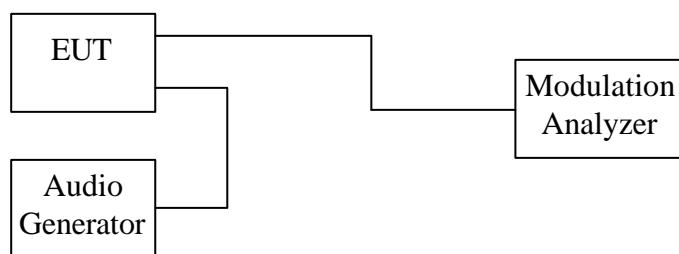


### 4.3 Measurement Instrument


Equipment	Manufacturer	Model No.	Next Cal. Date
Modulation Analyzer	Hewlett-Packard	8901A	12/01/2003
Multifunction Synthesizer	Hewlett-Packard	8904A	12/07/2003
Oscilloscope	Lecroy	9350A	05/26/2003

### 4.4 Measurement Result


A). Frequency response

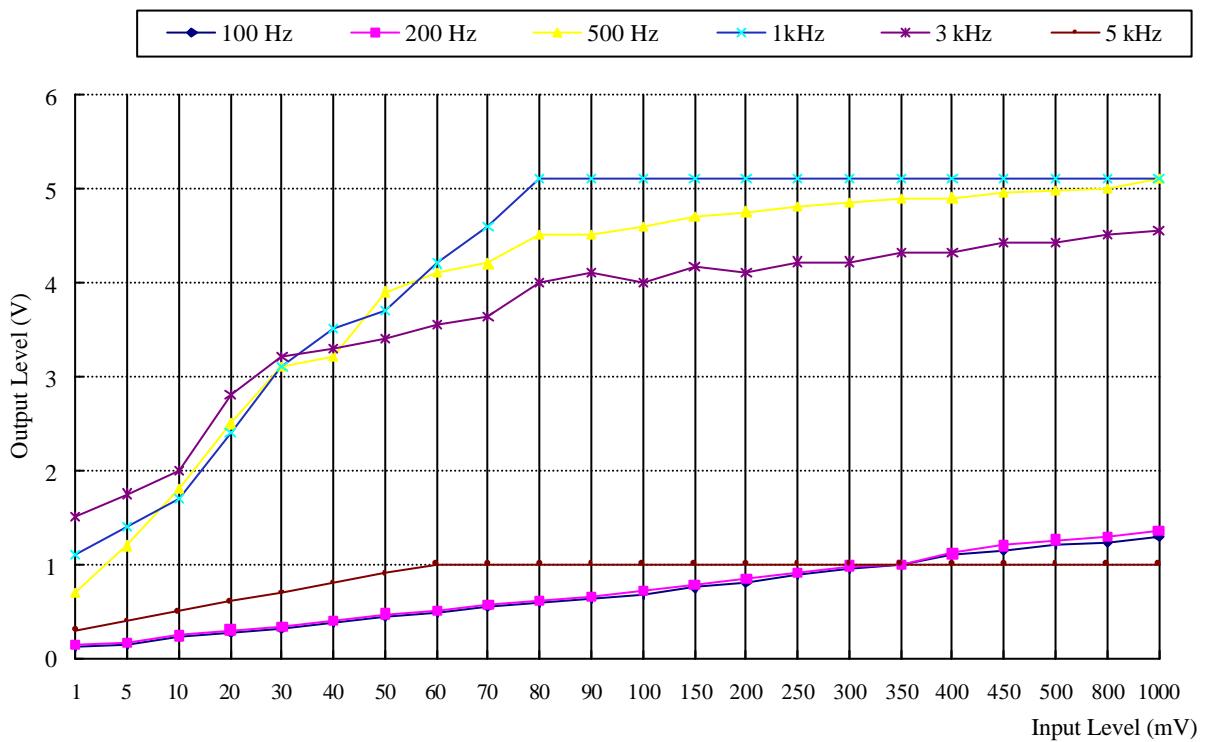

## B). Modulation Limit

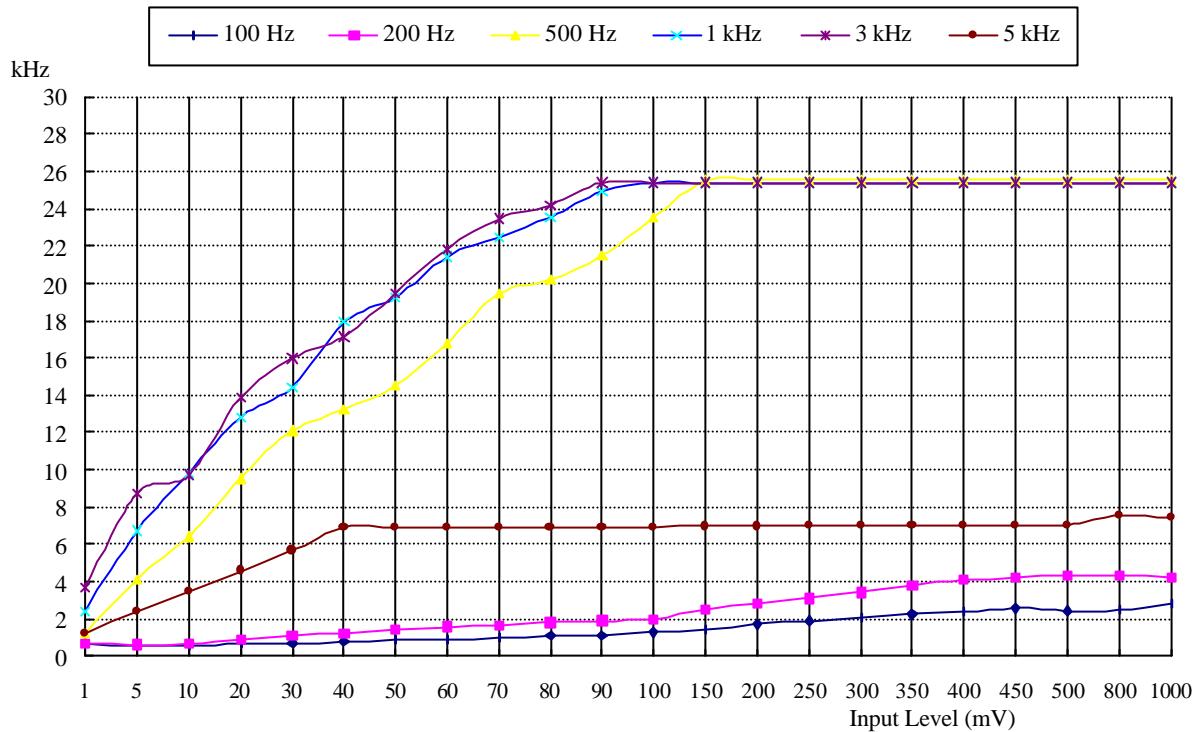

## C). Frequency response of all circuits

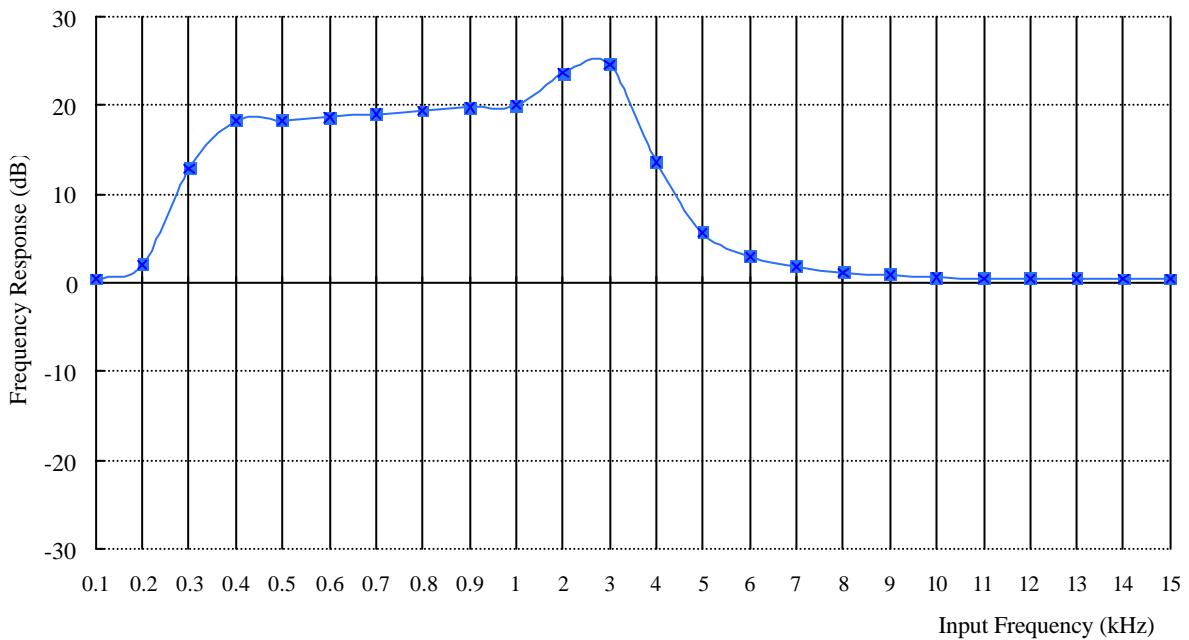

## 5. OCCUPIED BANDWIDTH OF EMISSION

### 5.1 Provisions Applicable


According to § 2.1049 (c)(1), For radiotelephone transmitter, other than single sideband or independent sideband transmitter, when modulated by a 2.5kHz tone at an input level 16 dB greater than that necessary to produce 50 percent modulation.

According to § 74.861(e)(5), the frequency emission bandwidth shall not exceed 200 kHz.

### 5.2 Measurement Method

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4, and Install new batteries in the EUT. Turn on the EUT ant set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Apply a 2.5 kHz modulation signal to EUT and measure the frequencies of the modulated signal from the EUT where it is the specified number of dB below the reference level set in step 2. This is the occupied bandwidth specified.

Figure 4 : Occupied bandwidth measurement configuration

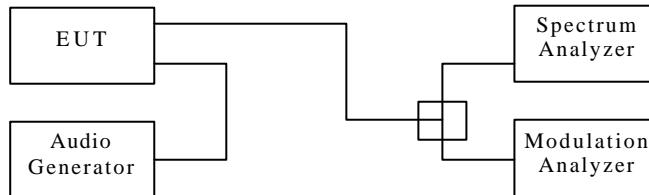


### 5.3 Occupied Bandwidth Test Equipment

Equipment	Manufacturer	Model No.	Next Cal. Date
Spectrum Analyzer	R&S	ESBI	05/25/2003
Modulation Analyzer	Hewlett-Packard	8901A	12/01/2003
Multifunction Synthesizer	Hewlett-Packard	8904A	12/07/2003
Plotter	Hewlett-Packard	7440A	N/A

## 5.4 Bandwidth Measured

### 5.4.1 Input Level Derived

Input Audio Frequency : 2.5 kHz, Sine Wave

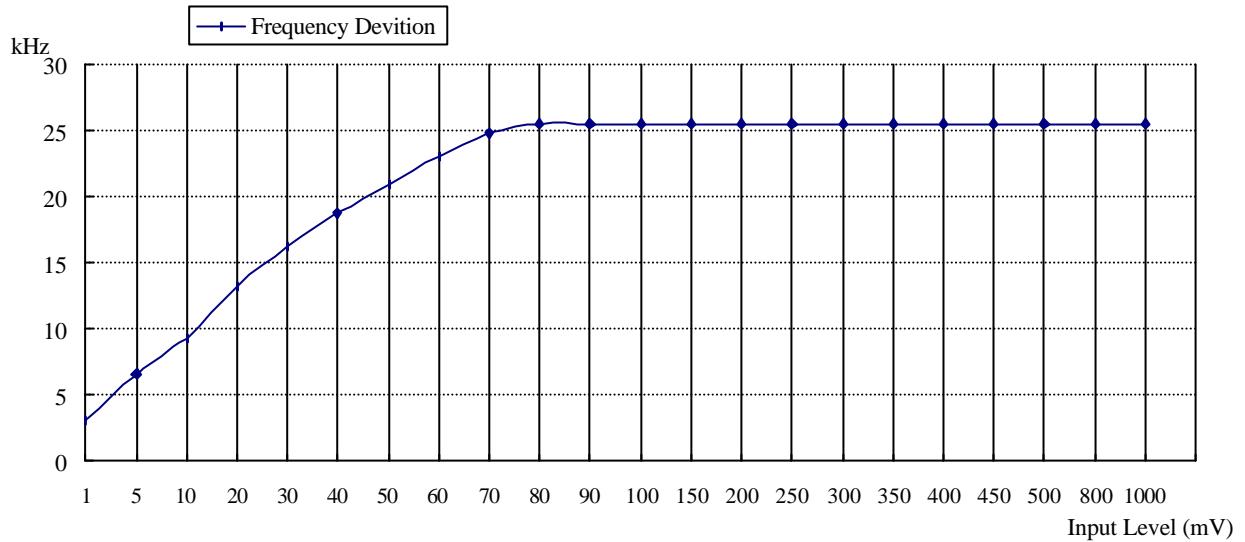

The Level input to produce 50 % modulation is 20 mV, therefore the magnitude 16 dB greater than it is 126 mV.

### 5.4.2 Occupied Bandwidth Plotted

The Channel Low 26 dB Bandwidth is 148.8KHz.

The Channel Mid 26 dB Bandwidth is 141.3KHz.

The Channel High 26 dB Bandwidth is 148.6KHz.

Please see appendix 1 for plotted data.

## 6. FIELD STRENGTH OF EMISSION

### 6.1 Provisions Applicable

According to § 2.1053, measurements shall be made to detect spurious emission that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal condition of installation and operation. Information submitted shall include the relative radiated power of spurious emission with reference to the rated power output of the transmitter, assuming all emissions are radiated from a halfwave dipole antenna.

According to § 74.861(e)(6), the mean power of emissions shall be attenuated below the mean output power of the transmitter in accordance with the following schedule:

- (i) on any frequency removed from the operating frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: at least 25 dB.
- (ii) on any frequency removed from the operating frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: at least 35 dB.
- (iii) on any frequency removed from the operating frequency by more than 250 percent of the authorized bandwidth shall be attenuated below the unmodulated carrier by at least 43 plus 10 Log(output power in watts) dB.

### 6.2 Measurement Procedure

1. Setup the configuration per figure 1 and 2 for frequencies measured below and above 1 GHz respectively, adjusting the input voltage to produce the maximum power as measured in chapter 3.
2. Adjust the analyzer for each frequency measured in chapter 6 on a 1 MHz frequency span and 1MHz resolution bandwidth.
3. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the height when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0° to 360°, and record the highest value indicated on spectrum analyzer as reference value.
4. Repeat step 3 until all frequencies need to be measured were complete.
5. Repeat step 4 with search antenna in vertical polarized orientations.
6. Replace the EUT with a tuned dipole antenna (horn antenna for above 1 GHz) relative to each frequency in horizontally polarized orientation and as the same polarized orientation with search antenna. Connect the tuned dipole antenna to a standard signal generator (SG) via a low loss cable. Power on the SG and tune the right frequency in measuring as well as set SG at an appreciated output level. Raise and lower the search antenna to get the highest value on spectrum analyzer, and then hold this position. Adjust the SG output to get an identical value derived from step 3 on spectrum analyzer. Record this value for result calculated.

7. Repeat step 6 until all frequencies need to be measured were complete.
8. Repeat step 7 with both dipole antenna (horn antenna for above 1 GHz) and search antenna in vertical polarized orientations.

### 6.3 Measuring Instrument

Equipment	Manufacturer	Model No.	Next Cal. Date
Spectrum Analyzer	Hewlett-Packard	8568B	01/25/2004
Quasi Peak Detector	Hewlett-Packard	85650A	01/25/2004
Pre-selector	Hewlett-Packard	85685A	01/25/2004
Spectrum Analyzer	Hewlett-Packard	8564E	05/16/2004
Horn Antenna	EMCO	3115	05/14/2004
Log periodic Antenna	EMCO	3146	11/05/2003
Biconical Antenna	EMCO	3110B	11/05/2003
Preamplifier	Hewlett-Packard	8449B	05/10/2004
Preamplifier	Hewlett-Packard	8447D	09/29/2003

Measuring instrument setup in frequency band measured is as following :

Frequency Band (MHz)	Instrument	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	Spectrum Analyzer	Peak	100 kHz	100 kHz
Above 1000	Spectrum Analyzer	Peak	1 MHz	1 MHz

## 6.4 Measuring Data

### A. Channel Low

Operated mode : 790.371 MHz      Test Date : May 22, 2003  
 Temperature : 25      Humidity : 65%

Unmodulated carrier output power is 1.5 dBm , or 1.4125 mW (ERP).

The limit of spurious or harmonics is calculated as following :

$$1.5 - [43 + 10 \log(\text{carrier output power in W})], \text{ or } -13 \text{ dBm}$$

Frequency (MHz)	Meter Reading (dBuV) H    V		SG Reading (dBm) H    V		Amp. Gain (dBm)	Antenna Gain	Antenna Gain Corr'	Cable Loss (dB)	Result (dBm) H    V		Limit (dBm)	Margin (dB)
1580.791	53.45	56.33	-23.38	-20.17	31.90	9.18	-2.0	-1.33	-49.43	-46.22	-13.0	-33.22
2371.087	63.33	61.50	-12.44	-12.27	36.38	9.32	-2.0	-1.75	-43.25	-43.08	-13.0	-30.08
3161.608	58.67	53.83	-11.32	-15.57	36.18	9.70	-2.0	-1.75	-41.55	-45.80	-13.0	-28.55
3951.821	---	---	---	---	---	---	-2.0	---	---	---	-13.0	---
4742.235	---	---	---	---	---	---	-2.0	---	---	---	-13.0	---
5532.746	---	---	---	---	---	---	-2.0	---	---	---	-13.0	---
6322.977	---	---	---	---	---	---	-2.0	---	---	---	-13.0	---
7113.329	---	---	---	---	---	---	-2.0	---	---	---	-13.0	---
7903.710	---	---	---	---	---	---	-2.0	---	---	---	-13.0	---

Note :

1. Remark “---“ means that the emission level is too weak to be detected.

2. For measured frequency below 1GHz, a tuned dipole antenna is used.

3. Result calculation is as following :

$$\text{Result} = \text{SG Reading} - \text{Amp. Gain} + \text{Antenna Gain} + \text{Antenna Gain Corrected} + \text{Cable Loss}$$

Antenna Gain Corrected : is used for antenna other than dipole to convert radiated power to ERP.

4. Spurious or harmonics above 1 GHz is too low to be detected or attenuated more than 60 dB from limit value.

**B. Channel Mid**

Operated mode : 797.709 MHz  
 Temperature : 25

Test Date : May 22, 2003  
 Humidity : 65%

Unmodulated carrier output power is 1.6 dBm , or 1.4454 mW (ERP).

The limit of spurious or harmonics is calculated as following :

$$1.6-[43+10\log(\text{carrier output power in W})], \text{ or } -13\text{dBm}$$

Frequency (MHz)	Meter Reading (dBuV)		SG Reading (dBm)		Amp. Gain (dBm)	Antenna Gain	Antenna Gain Corr'	Cable Loss (dB)	Result (dBm)		Limit (dBm)	Margin (dB)
	H	V	H	V					H	V		
1595.405	54.21	57.14	-22.62	-19.36	36.90	9.18	-2.0	-1.33	-53.67	-50.41	-13.0	-37.41
2393.116	63.45	62.10	-6.88	-10.73	36.34	9.26	-2.0	-1.75	-37.71	-41.56	-13.0	-24.71
3190.827	59.10	54.12	-12.07	-15.05	31.16	9.70	-2.0	-1.75	-42.28	-45.26	-13.0	-29.28
3988.538	---	---	---	---	---	---	-2.0	---	---	---	-13.0	---
4786.249	---	---	---	---	---	---	-2.0	---	---	---	-13.0	---
5583.960	---	---	---	---	---	---	-2.0	---	---	---	-13.0	---
6381.671	---	---	---	---	---	---	-2.0	---	---	---	-13.0	---
7179.382	---	---	---	---	---	---	-2.0	---	---	---	-13.0	---
7977.090	---	---	---	---	---	---	-2.0	---	---	---	-13.0	---

Note :

1. Remark “---“ means that the emission level is too weak to be detected.
2. For measured frequency below 1GHz, a tuned dipole antenna is used.
3. Result calculation is as following :

Result = SG Reading – Amp. Gain + Antenna Gain + Antenna Gain Corrected + Cable Loss

Antenna Gain Corrected : is used for antenna other than dipole to convert radiated power to ERP.

4. Spurious or harmonics above 1 GHz is too low to be detected or attenuated more than 60 dB from limit value.

**C. Channel High**

Operated mode : 805.728 MHz  
 Temperature : 25

Test Date : May 22, 2003  
 Humidity : 65%

Unmodulated carrier output power is 0.9 dBm , or 1.2102 mW (ERP).

The limit of spurious or harmonics is calculated as following :

$$0.9-[43+10\log(\text{carrier output power in W})], \text{ or } -13\text{dBm}$$

Frequency (MHz)	Meter Reading (dBuV)		SG Reading (dBm)		Amp. Gain (dBm)	Antenna Gain	Antenna Gain Corr'	Cable Loss (dB)	Result (dBm)		Limit (dBm)	Margin (dB)
	H	V	H	V					H	V		
1611.456	54.14	56.77	-22.69	-19.73	36.90	9.18	-2.0	-1.33	-53.74	-50.78	-13.0	-37.78
2417.184	63.92	62.14	-6.41	-10.69	36.34	9.26	-2.0	-1.75	-37.24	-41.52	-13.0	-24.24
3222.912	59.11	54.08	-12.06	-15.09	31.16	9.70	-2.0	-1.75	-42.27	-45.30	-13.0	-29.27
4028.640	---	---	---	---	---	---	-2.0	---	---	---	-13.0	---
4834.368	---	---	---	---	---	---	-2.0	---	---	---	-13.0	---
5640.096	---	---	---	---	---	---	-2.0	---	---	---	-13.0	---
6445.824	---	---	---	---	---	---	-2.0	---	---	---	-13.0	---
7251.552	---	---	---	---	---	---	-2.0	---	---	---	-13.0	---
8057.280	---	---	---	---	---	---	-2.0	---	---	---	-13.0	---

Note :

1. Remark “---“ means that the emission level is too weak to be detected.
2. For measured frequency below 1GHz, a tuned dipole antenna is used.
3. Result calculation is as following :

Result = SG Reading – Amp. Gain + Antenna Gain + Antenna Gain Corrected + Cable Loss

Antenna Gain Corrected : is used for antenna other than dipole to convert radiated power to ERP.

4. Spurious or harmonics above 1 GHz is too low to be detected or attenuated more than 60 dB from limit value.

**D. Emission mask plots**

Please see appendix 2 for plotted data.

## 6.5 Radiated Measurement Photos

Please see Exhibit F-Test Setup Photos

## 7. FREQUENCY STABILITY MEASUREMENT

### 7.1 Provisions Applicable

According to § 2.1055 (a)(1), the frequency stability shall be measured with variation of ambient temperature from -30 to +50 centigrade, and according to § 2.1055 (d)(2), the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point which is specified by the manufacturer.

According to § 74.861(e)(4), the frequency tolerance of the transmitter shall be 0.005 percent.

### 7.2 Measurement Procedure

#### A) Frequency stability versus environmental temperature


1. Setup the configuration per figure 5 for frequencies measured at ambient temperature if it is within 15 to 25 . Otherwise, an environmental chamber set for a temperature of 20 shall be used. Install new batteries in the EUT.
2. Turn on EUT and set SA center frequency to the right frequency needs to be measured. Then set SA RBW to 30 kHz, VBW to 100kHz and frequency span to 500 kHz. Record this frequency to be a reference.
3. Set the temperature of chamber to 50 . Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
4. Repeat step 2 with a 10 decreased per stage until the lowest temperature -30 is measured, record all measurement frequencies.

#### B) Frequency stability versus input voltage

1. Setup the configuration per figure 7 for frequencies measured at ambient temperature if it is within 15 to 25 . Otherwise, an environmental chamber set for a temperature of 20 shall be used. Install new batteries in the EUT.

2. Set SA center frequency to the right frequency needs to be measured. Then set SA RBW to 30 kHz, VBW to 100kHz and frequency span to 500 kHz. Record this frequency to be a reference.
3. For battery operated only device, supply the EUT primary voltage at the battery operating end point which is specified by the manufacturer and record the frequency.

Figure 5 : Frequency stability measurement configuration

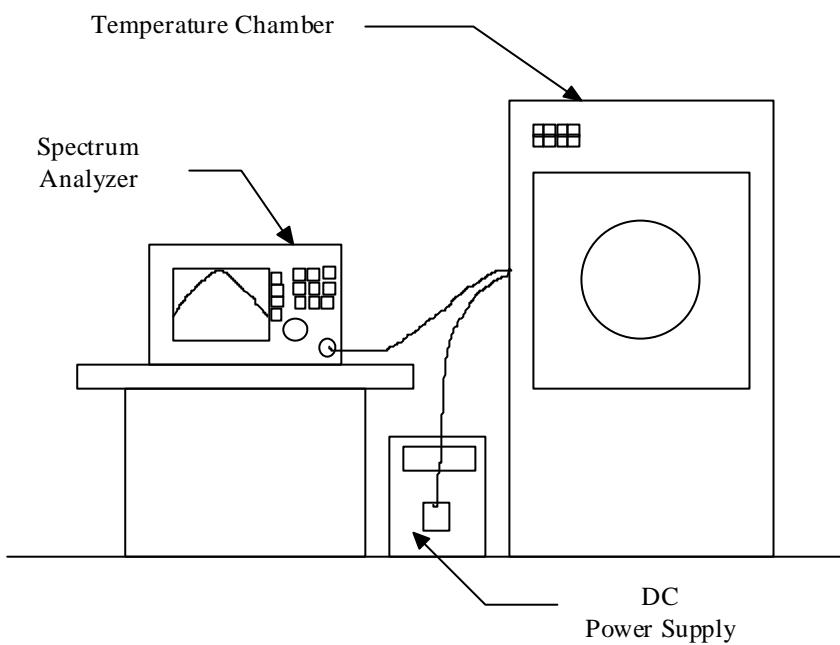

### 7.3 Measurement Instrument

Equipment	Manufacturer	Model No.	Next Cal. Date
Spectrum Analyzer	HP	8564E	05/16/2004
Temperature Chamber	ACS	EOS 200T	01/17/2004

## 7.4 Measurement Data

### A1. Frequency stability versus environment temperature

Reference Frequency : 790.371 MHz			Limit : 0.005%				
Environment Temperature ( )	Power Supplied (Vdc)	Frequency measured with time elapsed					
		2 minute		5 minute		10 minute	
50	New Batt.	790.3646	-0.00081	790.3782	0.00091	790.3427	-0.00358
	New Batt.	790.3798	0.00111	790.3620	-0.00114	790.3989	0.00353
	New Batt.	790.3822	0.00142	790.3539	-0.00216	790.3917	0.00262
40	New Batt.	790.3810	0.00127	790.3893	0.00232	790.4006	0.00375
	New Batt.	790.3971	0.00330	790.3759	0.00062	790.3700	-0.00013
	New Batt.	790.3947	0.00300	790.3699	-0.00014	790.3421	-0.00366
30	New Batt.	790.3670	-0.00051	790.3987	0.00350	790.3539	-0.00216
	New Batt.	790.3812	0.00129	790.3524	-0.00235	790.3741	0.00039
	New Batt.	790.3810	0.00127	790.3824	0.00144	790.3905	0.00247
20	New Batt.	790.3891	0.00229	790.3810	0.00127	790.3430	-0.00354
	New Batt.	790.3894	0.00233	790.3620	-0.00114	790.3678	-0.00040
	New Batt.	790.3784	0.00094	790.3631	-0.00100	790.3674	-0.00046
10	New Batt.	790.4007	0.00376	790.3791	0.00102	790.3641	-0.00087
	New Batt.	790.3487	-0.00282	790.3923	0.00269	790.3793	0.00105
	New Batt.	790.3837	0.00161	790.3796	0.00109	790.3793	0.00105
0	New Batt.	790.3530	-0.00228	790.3427	-0.00358	790.3592	-0.00149
	New Batt.	790.3559	-0.00191	790.3985	0.00348	790.3897	0.00237
	New Batt.	790.3527	-0.00232	790.3827	0.00148	790.3662	-0.00061
-10	New Batt.	790.3803	0.00118	790.3833	0.00156	790.3476	-0.00296
	New Batt.	790.3898	0.00238	790.3492	-0.00276	790.3662	-0.00061
	New Batt.	790.3425	-0.00361	790.3460	-0.00316	790.3586	-0.00157
-20	New Batt.	790.3759	0.00062	790.3722	0.00015	790.3752	0.00053
	New Batt.	790.3527	-0.00232	790.3833	0.00156	790.3472	-0.00301
	New Batt.	790.3723	0.00016	790.3590	-0.00152	790.3553	-0.00199

### A2. Frequency stability versus end-point supplied voltage (2Vdc)

Reference Frequency : 790.371 MHz			Limit : 0.005%				
Environment Temperature ( )	Power Supplied (Vdc)	Frequency measured with time elapsed					
		2 minute		5 minute		10 minute	
25	End-Point	790.3995	0.00361	790.3856	0.00185	790.3980	0.00342

## B1. Frequency stability versus environment temperature

Reference Frequency : 797.709 MHz			Limit : 0.005%				
Environment Temperature ( )	Power Supplied (Vdc)	Frequency measured with time elapsed					
		2 minute		5 minute		10 minute	
50	New Batt.	797.7271	0.00227	797.7139	0.00061	797.7290	0.00251
	New Batt.	797.7153	0.00079	797.6789	-0.00377	797.7296	0.00258
	New Batt.	797.7358	0.00336	797.6876	-0.00268	797.6989	-0.00127
40	New Batt.	797.6972	-0.00148	797.6992	-0.00123	797.6795	-0.00370
	New Batt.	797.7261	0.00214	797.6807	-0.00355	797.7038	-0.00065
	New Batt.	797.7154	0.00080	797.6876	-0.00268	797.7130	0.00050
30	New Batt.	797.7181	0.00114	797.7307	0.00272	797.6992	-0.00123
	New Batt.	797.6803	-0.00360	797.6893	-0.00247	797.7083	-0.00009
	New Batt.	797.7264	0.00218	797.7256	0.00208	797.7105	0.00019
20	New Batt.	797.6992	-0.00123	797.7209	0.00149	797.7325	0.00295
	New Batt.	797.6941	-0.00187	797.7201	0.00139	797.7066	-0.00030
	New Batt.	797.7166	0.00095	797.6912	-0.00223	797.7039	-0.00064
10	New Batt.	797.7365	0.00345	797.7040	-0.00063	797.7237	0.00184
	New Batt.	797.6928	-0.00203	797.7190	0.00125	797.6903	-0.00234
	New Batt.	797.7058	-0.00040	797.6817	-0.00342	797.7067	-0.00029
0	New Batt.	797.7266	0.00221	797.6863	-0.00285	797.7102	0.00015
	New Batt.	797.7154	0.00080	797.7305	0.00270	797.6863	-0.00285
	New Batt.	797.6884	-0.00258	797.7346	0.00321	797.7086	-0.00005
-10	New Batt.	797.6862	-0.00286	797.6861	-0.00287	797.7391	0.00377
	New Batt.	797.6973	-0.00147	797.7305	0.00270	797.7261	0.00214
	New Batt.	797.7137	0.00059	797.7314	0.00281	797.7277	0.00234
-20	New Batt.	797.7219	0.00162	797.6875	-0.00270	797.7332	0.00303
	New Batt.	797.6828	-0.00328	797.7051	-0.00049	797.6955	-0.00169
	New Batt.	797.7368	0.00348	797.6831	-0.00325	797.7124	0.00043

## B2. Frequency stability versus end-point supplied voltage (2Vdc)

Reference Frequency : 797.709 MHz			Limit : 0.005%				
Environment Temperature ( )	Power Supplied (Vdc)	Frequency measured with time elapsed					
		2 minute		5 minute		10 minute	
25	End-Point	797.6850	-0.00301	797.6945	-0.00182	797.6799	-0.00365

## C1. Frequency stability versus environment temperature

Reference Frequency : 805.728 MHz			Limit : 0.005%				
Environment Temperature ( )	Power Supplied (Vdc)	Frequency measured with time elapsed					
		2 minute		5 minute		10 minute	
50	New Batt.	805.7259	-0.00026	805.7004	-0.00343	805.7286	0.00007
	New Batt.	805.7135	-0.00180	805.7161	-0.00148	805.7042	-0.00295
	New Batt.	805.7574	0.00365	805.7077	-0.00252	805.7386	0.00132
40	New Batt.	805.7308	0.00035	805.7282	0.00002	805.7054	-0.00280
	New Batt.	805.7472	0.00238	805.7474	0.00241	805.7499	0.00272
	New Batt.	805.7146	-0.00166	805.7305	0.00031	805.7017	-0.00326
30	New Batt.	805.7211	-0.00086	805.7302	0.00027	805.7083	-0.00244
	New Batt.	805.7505	0.00279	805.7094	-0.00231	805.7272	-0.00010
	New Batt.	805.6979	-0.00374	805.7332	0.00065	805.7012	-0.00333
20	New Batt.	805.7461	0.00225	805.7073	-0.00257	805.7408	0.00159
	New Batt.	805.7210	-0.00087	805.7139	-0.00175	805.7214	-0.00082
	New Batt.	805.7415	0.00168	805.7318	0.00047	805.7022	-0.00320
10	New Batt.	805.7191	-0.00110	805.7038	-0.00300	805.7129	-0.00187
	New Batt.	805.7501	0.00274	805.7215	-0.00081	805.7257	-0.00029
	New Batt.	805.7246	-0.00042	805.7229	-0.00063	805.7567	0.00356
0	New Batt.	805.7102	-0.00221	805.7079	-0.00249	805.7186	-0.00117
	New Batt.	805.7403	0.00153	805.7550	0.00335	805.7052	-0.00283
	New Batt.	805.7144	-0.00169	805.7512	0.00288	805.7282	0.00002
-10	New Batt.	805.7578	0.00370	805.7110	-0.00211	805.7427	0.00182
	New Batt.	805.7158	-0.00151	805.7220	-0.00074	805.7074	-0.00256
	New Batt.	805.7173	-0.00133	805.7267	-0.00016	805.7179	-0.00125
-20	New Batt.	805.7230	-0.00062	805.7356	0.00094	805.7104	-0.00218
	New Batt.	805.7431	0.00187	805.7275	-0.00006	805.7360	0.00099
	New Batt.	805.7238	-0.00052	805.7465	0.00230	805.7205	-0.00093

## A2. Frequency stability versus end-point supplied voltage (2Vdc)

Reference Frequency : 805.728 MHz			Limit : 0.005%				
Environment Temperature ( )	Power Supplied (Vdc)	Frequency measured with time elapsed					
		2 minute		5 minute		10 minute	
25	End-Point	805.7456	0.00218	805.6993	-0.00356	805.7099	-0.00225


## 8 CONDUCTED EMISSION MEASUREMENT


### 8.1 Standard Applicable

This EUT is excused from investigation of conducted emission, for it is powered by battery only. According to § 15.207 (c), measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

For intentional device, Line Conducted Emission Limits are in accordance to § 15.207(a)

## Appendix 1 : Occupied Emission Bandwidth Plotted Data

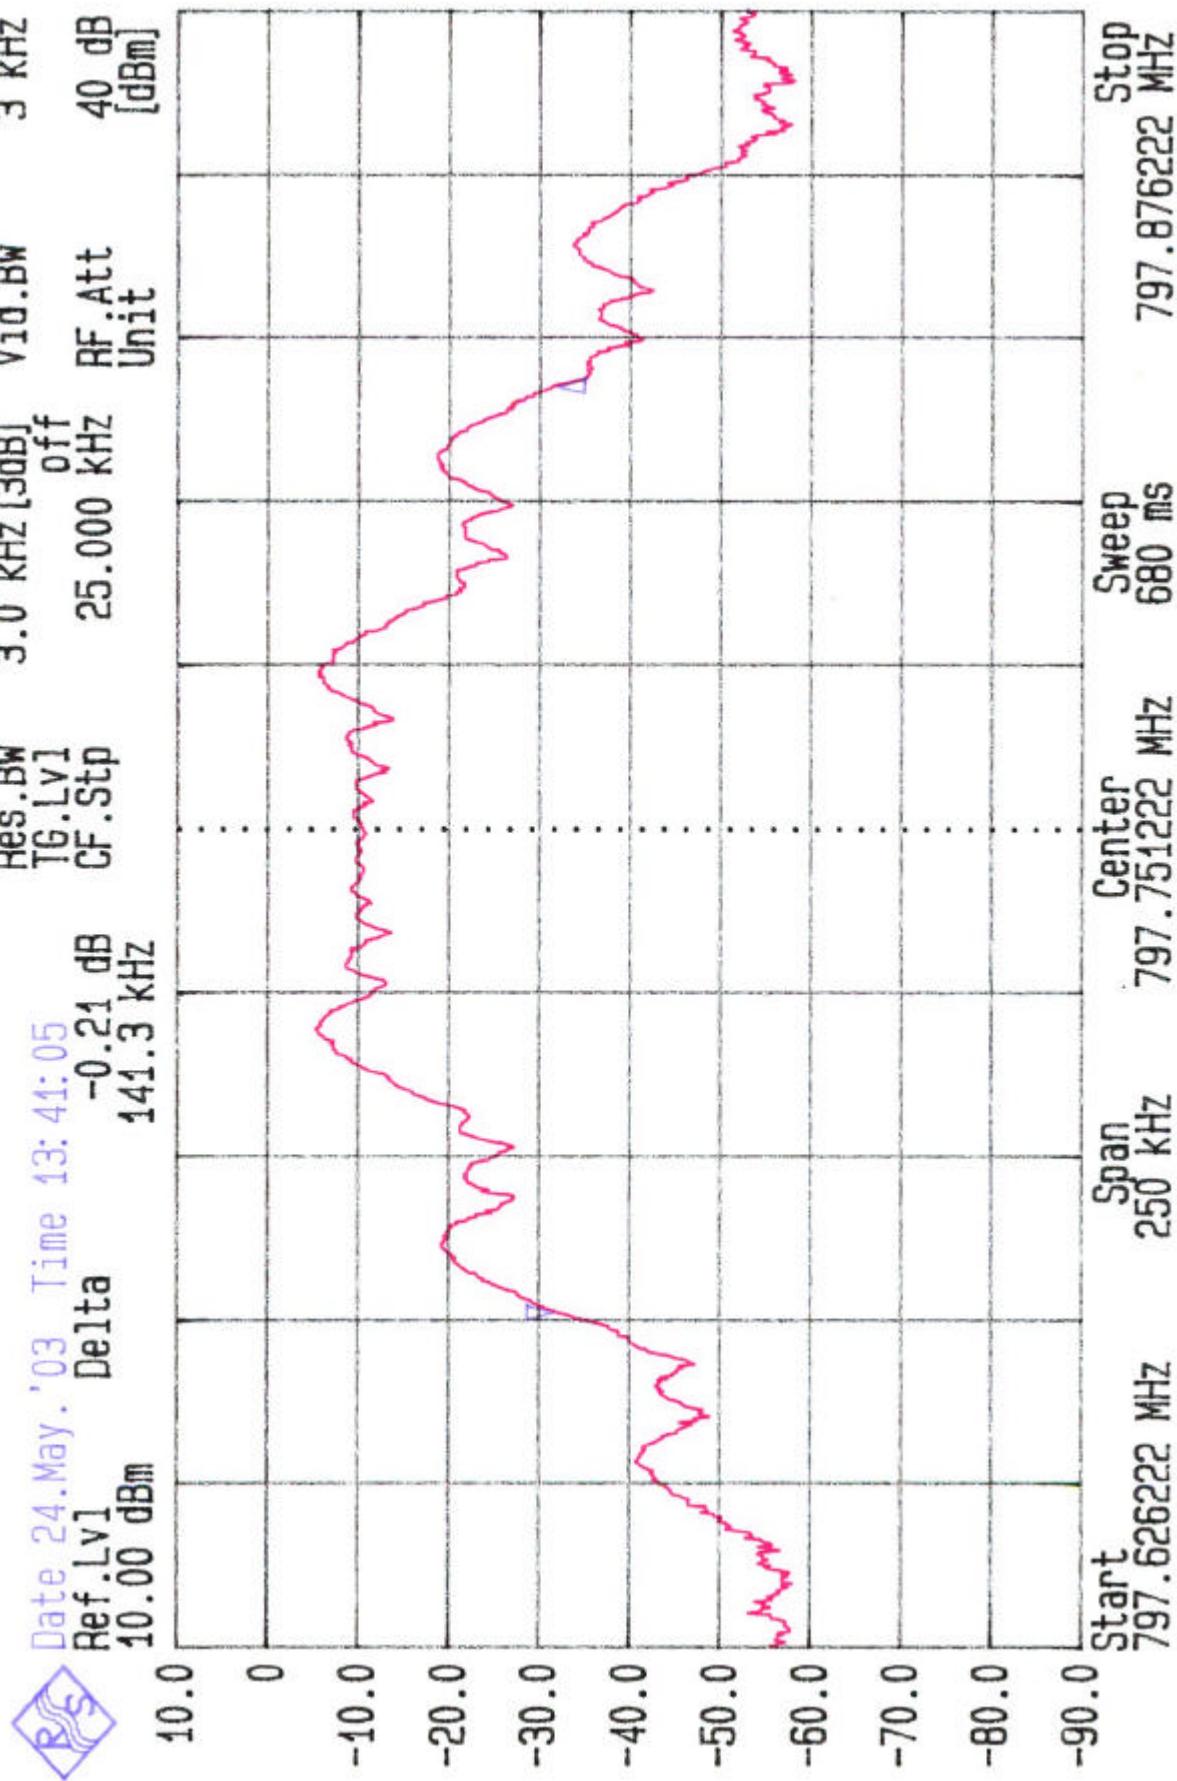

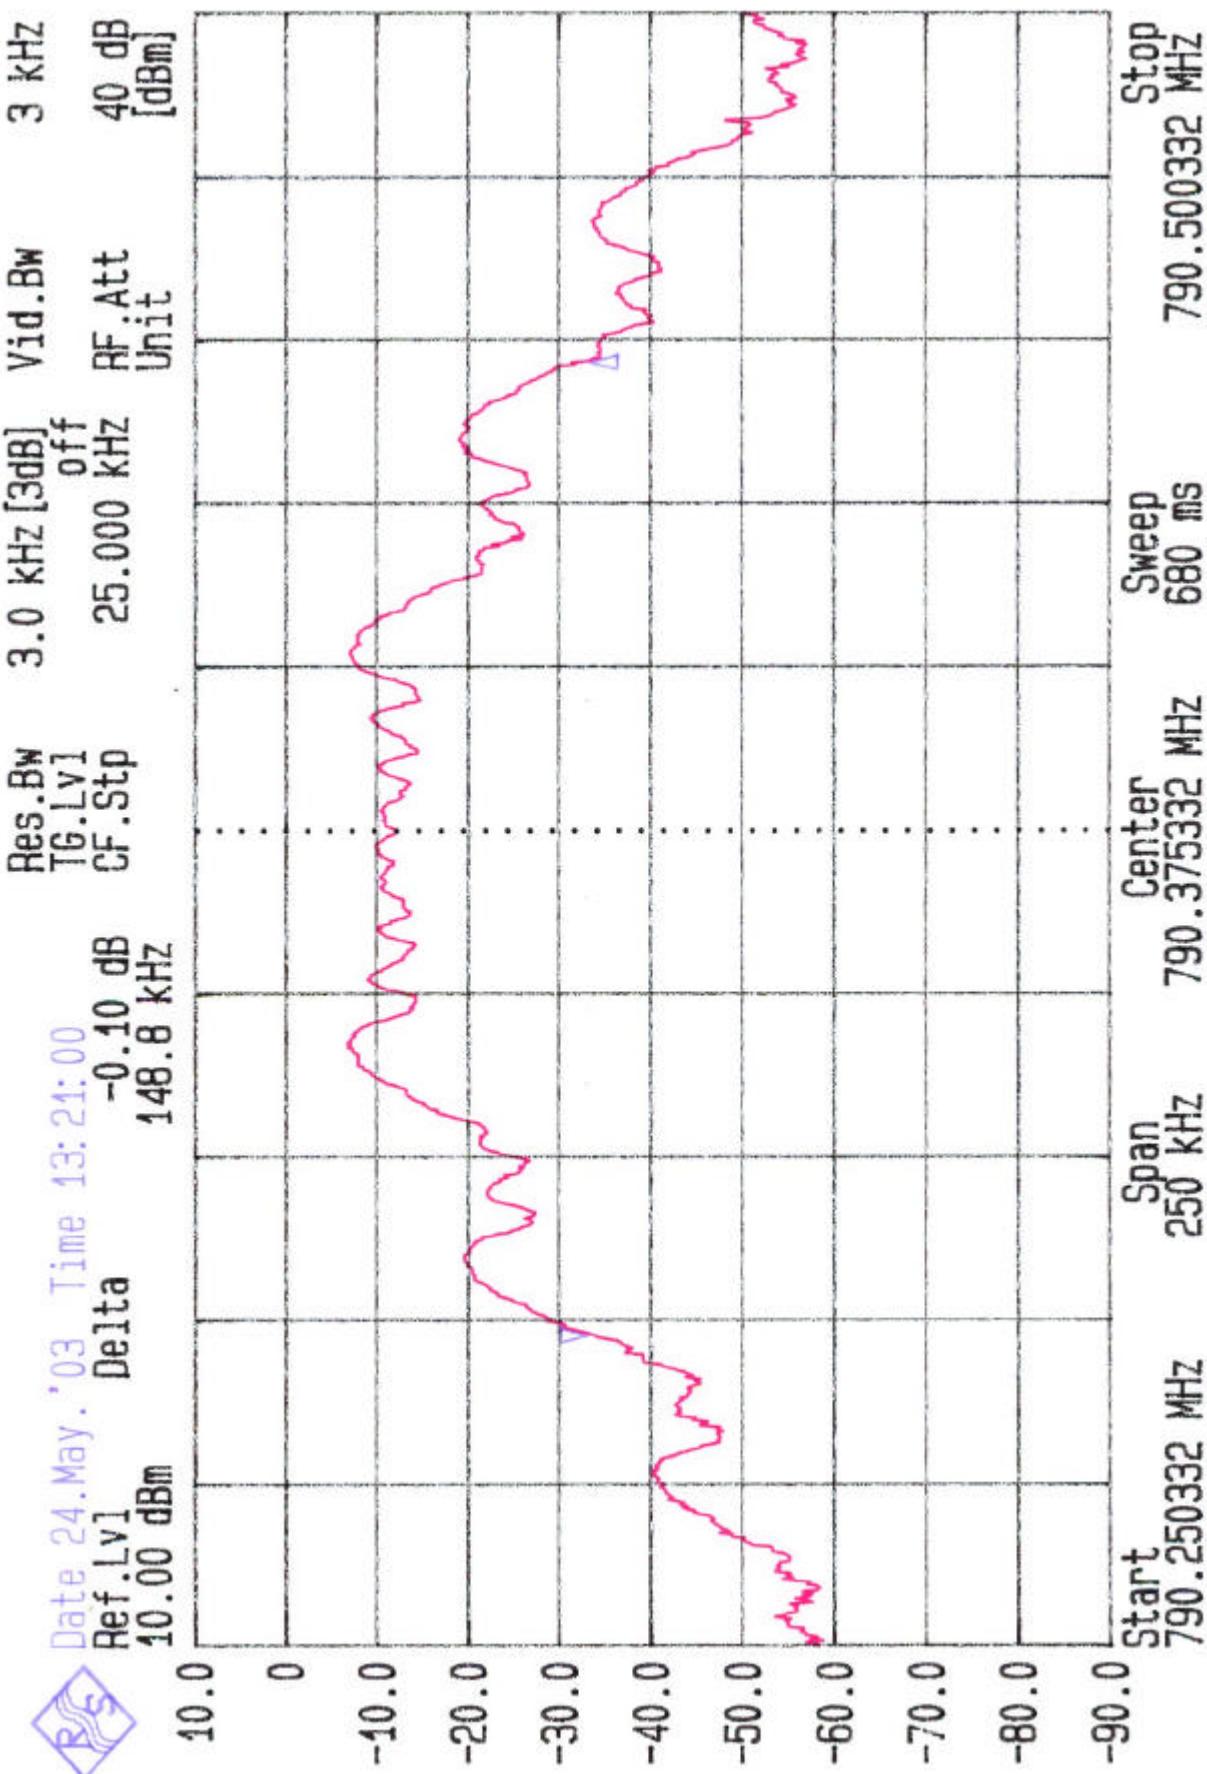



Date 24 May '03

Ref. Ly1

117.00 dB $\mu$ V

Res. BW

TG.Ly1

CF.Stp

0.20 dB

148.6 kHz

1 MHz [Imp]


off

25.000 kHz

RF.Att

Vid.BW

3 kHz

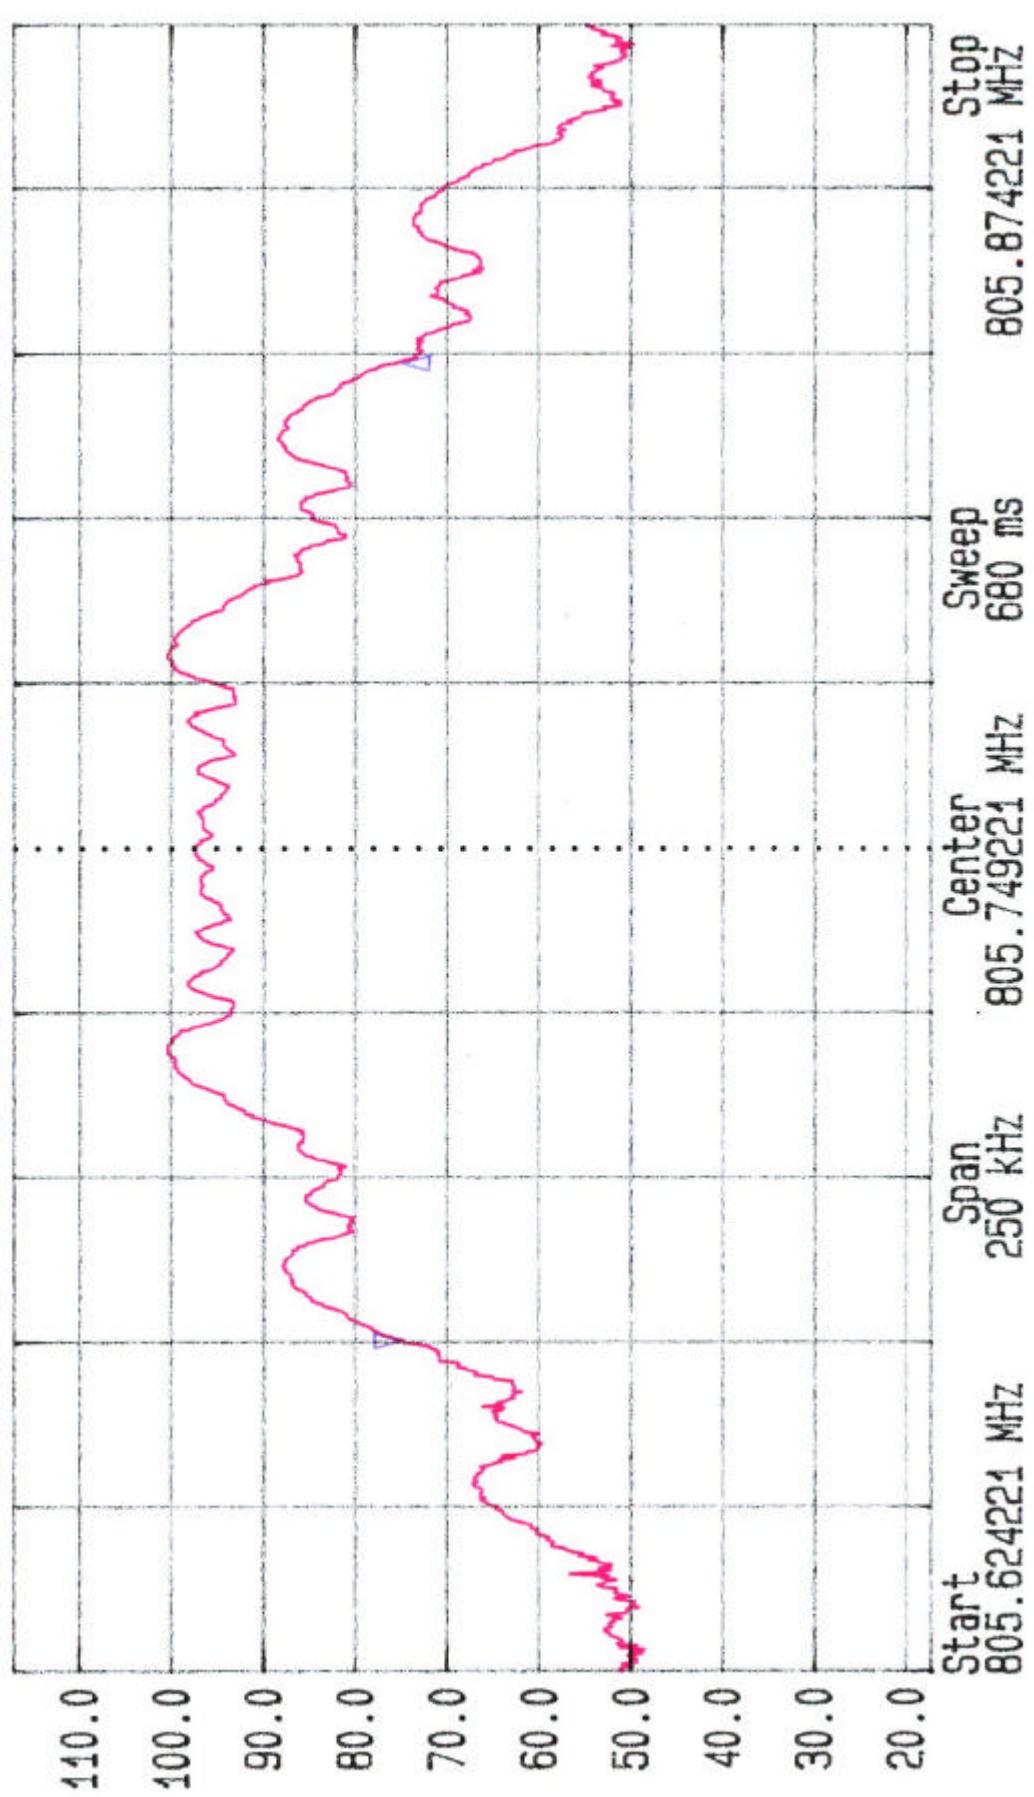

## Appendix 2 : Emission Mask Plotted Data



Date 24 May '03 Time 13:34:25

Ref Lv1 10.00 dBm  
Marker -5.18 dBm  
TG Lv1 797.722 MHz  
CF Stp 200.000 kHz  
Res.BW 3.0 kHz [3dB]  
Vid.BW off  
RF Att 40 dB  
[dBm]